



Specific Absorption Rate (SAR) Test Report
for
ZTE CORPORATION
on the
CDMA 1X Mobile Phone

Report Number : FA890805
Trade Name : ZTE
Model Name : ZTE C77
FCC ID : Q78-ZTEC77
Date of Testing : Sep. 23, 2008 ~ Sep. 24, 2008
Date of Report : Nov. 03, 2008
Date of Review : Nov. 03, 2008

- The test results refer exclusively to the tested model/sample only.
- Without written approval of SPORTON INTERNATIONAL INC., The test report shall not be reproduced except in full.
- Report Version: Rev. 02.

SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



Table of Contents

- 1. **Statement of Compliance**3
- 2. **Administration Data**4
 - 2.1 Testing Laboratory4
 - 2.2 Applicant4
 - 2.3 Manufacturer4
 - 2.4 Application Details4
- 3. **General Information**5
 - 3.1 Description of Device under Test (DUT)5
 - 3.2 Product Photos5
 - 3.3 Applied Standards6
 - 3.4 Device Category and SAR Limits6
 - 3.5 Test Conditions6
 - 3.6.1 Ambient Condition6
 - 3.6.2 Test Configuration6
 - 3.6.3 FCC 3G SAR Measurement Procedures7
- 4. **Specific Absorption Rate (SAR)**9
 - 4.1 Introduction9
 - 4.2 SAR Definition9
- 5. **SAR Measurement Setup**10
 - 5.1 DASY E-Field Probe System11
 - 5.1.1 ET3DV6 E-Field Probe Specification11
 - 5.1.2 ET3DV6 E-Field Probe Calibration12
 - 5.2 DATA Acquisition Electronics (DAE)12
 - 5.3 Robot12
 - 5.4 Measurement Server13
 - 5.5 SAM Twin Phantom13
 - 5.6 Device Holder for SAM Twin Phantom15
 - 5.7 Data Storage and Evaluation16
 - 5.7.1 Data Storage16
 - 5.7.2 Data Evaluation16
 - 5.8 Test Equipment List18
- 6. **Tissue Simulating Liquids**19
- 7. **Uncertainty Assessment**21
- 8. **SAR Measurement Evaluation**23
 - 8.1 Purpose of System Performance Check23
 - 8.2 System Setup23
 - 8.3 Validation Results25
- 9. **Description for DUT Testing Position**26
- 10. **Measurement Procedures**28
 - 10.1 Spatial Peak SAR Evaluation28
 - 10.2 Scan Procedures29
 - 10.3 SAR Averaged Methods29
- 11. **SAR Test Results**30
 - 11.1 Conducted Power30
 - 11.2 Test Records for Head SAR Test30
 - 11.3 Test Records for Body SAR Test30
- 12. **References**31
- Appendix A - System Performance Check Data**
- Appendix B - SAR Measurement Data**
- Appendix C - Calibration Data**
- Appendix D - Product Photos**
- Appendix E - Test Setup Photos**



1. Statement of Compliance

The Specific Absorption Rate (SAR) maximum results found during testing for the **ZTE CORPORATION CDMA 1X Mobile Phone ZTE C77** are as follows (with expanded uncertainty 21.9 %.):

| Position | SAR | CDMA2000 PCS (W/Kg) |
|-----------------|------------|--------------------------------|
| Head | | 1.45 |
| Body | | 0.723 |

They are in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1999 and had been tested in accordance with the measurement methods and procedures specified in OET Bulletin 65 Supplement C (Edition 01-01) and IEEE 1528-2003.

Approved by

Roy Wu
Manager



2. Administration Data

2.1 Testing Laboratory

Company Name : Sporton International Inc.
Address : No.52, Hwa-Ya 1st RD., Hwa Ya Technology Park, Kwei-Shan Hsiang,
TaoYuan Hsien, Taiwan, R.O.C.
Test Site : SAR01-HY
Telephone Number : 886-3-327-3456
Fax Number : 886-3-328-4978

2.2 Applicant

Company Name : ZTE CORPORATION
Address : ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan
District,Shenzhen, Guangdong, 518057, P.R.China

2.3 Manufacturer

Company Name : ZTE CORPORATION
Address : ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan
District,Shenzhen, Guangdong, 518057, P.R.China

2.4 Application Details

Date of reception of application: Sep. 08, 2008
Start of test : Sep. 23, 2008
End of test : Sep. 24, 2008

3. General Information

3.1 Description of Device under Test (DUT)

| Product Feature & Specification | |
|-----------------------------------|------------------------|
| DUT Type : | CDMA 1X Mobile Phone |
| Trade Name : | ZTE |
| Model Name : | ZTE C77 |
| FCC ID : | Q78-ZTEC77 |
| Tx Frequency : | 1850 MHz ~ 1910 MHz |
| Rx Frequency : | 1930 MHz ~ 1990 MHz |
| Maximum Output Power to Antenna : | 23.42 dBm |
| Antenna Type : | Fixed Internal Antenna |
| HW Version : | C73C |
| SW Version : | ZTEC77V0.0.0B01 |
| Type of Modulation : | QPSK |
| DUT Stage : | Production Unit |

Accessories List:

| Accessories Specification | | |
|---------------------------|--------------------|------------------------------------------------------|
| AC Adapter | Brand Name | ZTE |
| | Model Name | STC-A22O50U5-C |
| | Power Rating | I/P: 100-240Vac, 50-60Hz, 200mA; O/P: 5Vdc, 700mA |
| | AC Power Cord Type | 1.1 meter non-shielded cable without ferrite core |
| Battery | Brand Name | ZTE |
| | Model Name | Li3709T42P3h553447 |
| | Power Rating | 3.7Vdc, 900mAh |
| | Type | Li-ion |
| USB Cable | Signal Line Type | 1.2 meter non-shielded cable without ferrite core |
| LCD Panel | Brand Name | LEAD COMMUNICATIONS LTD. |
| | Model Name | 2.0' QCIF |

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

3.2 Product Photos

Refer to Appendix E.



3.3 Applied Standards

The Specific Absorption Rate (SAR) testing specification, method and procedure for this CDMA 1X Mobile Phone is in accordance with the following standards:

- 47 CFR Part 2 (2.1093),
- IEEE C95.1-1999,
- IEEE C95.3-2002,
- IEEE P1528-2003, and
- OET Bulletin 65 Supplement C (Edition 01-01)
- KDB 941225 D01 v02

3.4 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

3.5 Test Conditions

3.6.1 Ambient Condition

| | |
|---------------------|-------|
| Ambient Temperature | 20-24 |
| Humidity | <60 % |

3.6.2 Test Configuration

The device was controlled by using a base station emulator R&S CMU200. Communication between the device and the emulator was established by air link. The distance between the DUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of DUT. The DUT was set from the emulator to radiate maximum output power during all tests.


For SAR testing, EUT is in CDMA2000 link mode, and its crest factor is 1.

Measurements were performed on the lowest, middle, and highest channel for each testing position. However, measurements were performed only on the middle channel if the SAR is below 3 dB of limit.

3.6.3 FCC 3G SAR Measurement Procedures

The EUT was tested according to the requirements of the FCC 3G procedures and the 3.1.2.3.4.

CDMA2000 Setup Configuration:

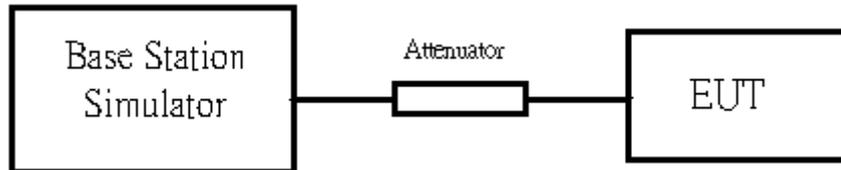

Setup Configuration

1. The EUT was connected to Base Station, Agilent 8960.
Refer to the drawing of Setup Configuration.
2. The RF path losses were compensated into the measurements.
3. A call was established between EUT and Base Station with following setting:
 - a. Set the test mode 1 and test mode 3.
 - b. Set the Power control All Up for (FCH) and (FCH+SCH).
4. The transmitted maximum output power was recorded.

| Call Setup Screen | | | |
|-------------------|-------------------------------|-----------------|--------------------------|
| Call Control | Active Cell Operating Mode | | Call Parms |
| | Mobile Station Information | | Cell Power |
| | ESN (Hex): | 0x6C3203AE | -86.00 |
| | ESN (Dec): | 108-03330990 | dBm/1.23 MHz |
| | NCC: | | Cell Band |
| | NMC: | | US PCS |
| | NSIN: | 3163712588 | Channel |
| | Slot Class: | Slotted | 1175 |
| | Slot Cycle Index: | 2 | Protocol Rev |
| | FCH Service Option Setup | | 6 (IS-2000) |
| | | Value | Radio Config |
| | Service Option for Fud1, Rvs1 | S055 (Loopback) | (Fud1, Rvs1) |
| | Service Option for Fud2, Rvs2 | S09 (Loopback) | S055 (Loopback) |
| | Service Option for Fud3, Rvs3 | S032 (+ SCH) | FCH Service Option Setup |
| | Service Option for Fud4, Rvs3 | S055 (Loopback) | |
| | Service Option for Fud5, Rvs4 | S055 (Loopback) | |
| Close Menu | | | |
| | Background | Active Cell | Sys Type: IS-2000 |
| | | Idle | |
| | | IntRef | Offset |
| | | | |
| | | | 1 of 3 |

Test Mode 1 in Radio Configuration 1 (FCH)



| Call Setup Screen | | | | | | | | | | | | | | | | | | | | | | |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|--|------------|------------|------------|--------------|------|--|------|--|-------|------------|-------------|---------|-------------------|---|--------------------|------------------|-------------|------------------|------------|
| Call Control | Active Cell Operating Mode | Call Parm | | | | | | | | | | | | | | | | | | | | |
| Operating Mode | <table border="1"> <thead> <tr> <th colspan="2">Mobile Station Information</th> </tr> </thead> <tbody> <tr> <td>ESN (Hex):</td> <td>0x6C32D3AE</td> </tr> <tr> <td>ESN (Dec):</td> <td>108-03330990</td> </tr> <tr> <td>NCC:</td> <td></td> </tr> <tr> <td>NMC:</td> <td></td> </tr> <tr> <td>MSIN:</td> <td>3163712588</td> </tr> <tr> <td>Slot Class:</td> <td>Slotted</td> </tr> <tr> <td>Slot Cycle Index:</td> <td>2</td> </tr> <tr> <td>Protocol Revision:</td> <td>6 (IS-2000_Rev0)</td> </tr> <tr> <td>Band Class:</td> <td>us Cell 1 us PCS</td> </tr> </tbody> </table> | Mobile Station Information | | ESN (Hex): | 0x6C32D3AE | ESN (Dec): | 108-03330990 | NCC: | | NMC: | | MSIN: | 3163712588 | Slot Class: | Slotted | Slot Cycle Index: | 2 | Protocol Revision: | 6 (IS-2000_Rev0) | Band Class: | us Cell 1 us PCS | Cell Power |
| Mobile Station Information | | | | | | | | | | | | | | | | | | | | | | |
| ESN (Hex): | | 0x6C32D3AE | | | | | | | | | | | | | | | | | | | | |
| ESN (Dec): | | 108-03330990 | | | | | | | | | | | | | | | | | | | | |
| NCC: | | | | | | | | | | | | | | | | | | | | | | |
| NMC: | | | | | | | | | | | | | | | | | | | | | | |
| MSIN: | | 3163712588 | | | | | | | | | | | | | | | | | | | | |
| Slot Class: | | Slotted | | | | | | | | | | | | | | | | | | | | |
| Slot Cycle Index: | | 2 | | | | | | | | | | | | | | | | | | | | |
| Protocol Revision: | | 6 (IS-2000_Rev0) | | | | | | | | | | | | | | | | | | | | |
| Band Class: | us Cell 1 us PCS | | | | | | | | | | | | | | | | | | | | | |
| Active Cell | | -86.00 | | | | | | | | | | | | | | | | | | | | |
| System Type | | dBm/1.23 MHz | | | | | | | | | | | | | | | | | | | | |
| IS-2000 | | Cell Band | | | | | | | | | | | | | | | | | | | | |
| | | US PCS | | | | | | | | | | | | | | | | | | | | |
| End Call | | Channel | | | | | | | | | | | | | | | | | | | | |
| | | 1175 | | | | | | | | | | | | | | | | | | | | |
| Paging INSI Setup | | Protocol Rev | | | | | | | | | | | | | | | | | | | | |
| | | 6 (IS-2000) | | | | | | | | | | | | | | | | | | | | |
| Handoff Setup | | Radio Config | | | | | | | | | | | | | | | | | | | | |
| | | (Fud3, Rvs3) | | | | | | | | | | | | | | | | | | | | |
| | | S032 (+ SCH) | | | | | | | | | | | | | | | | | | | | |
| | | FCH Service Option Setup | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | Background | Active Cell | | | | | | | | | | | | | | | | | | | | |
| | | Connected + Data | | | | | | | | | | | | | | | | | | | | |
| | | Sys Type: IS-2000 | | | | | | | | | | | | | | | | | | | | |
| 1 of 2 | IntRef | Offset | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | 1 of 3 | | | | | | | | | | | | | | | | | | | | |

Test Mode 3 in Radio Configuration 3 (Service Option32)

4. Specific Absorption Rate (SAR)

4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person’s awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \frac{\delta T}{\delta t}$$

, where C is the specific heat capacity, δT is the temperature rise and δt the exposure duration,

or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

, where σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

5. SAR Measurement Setup

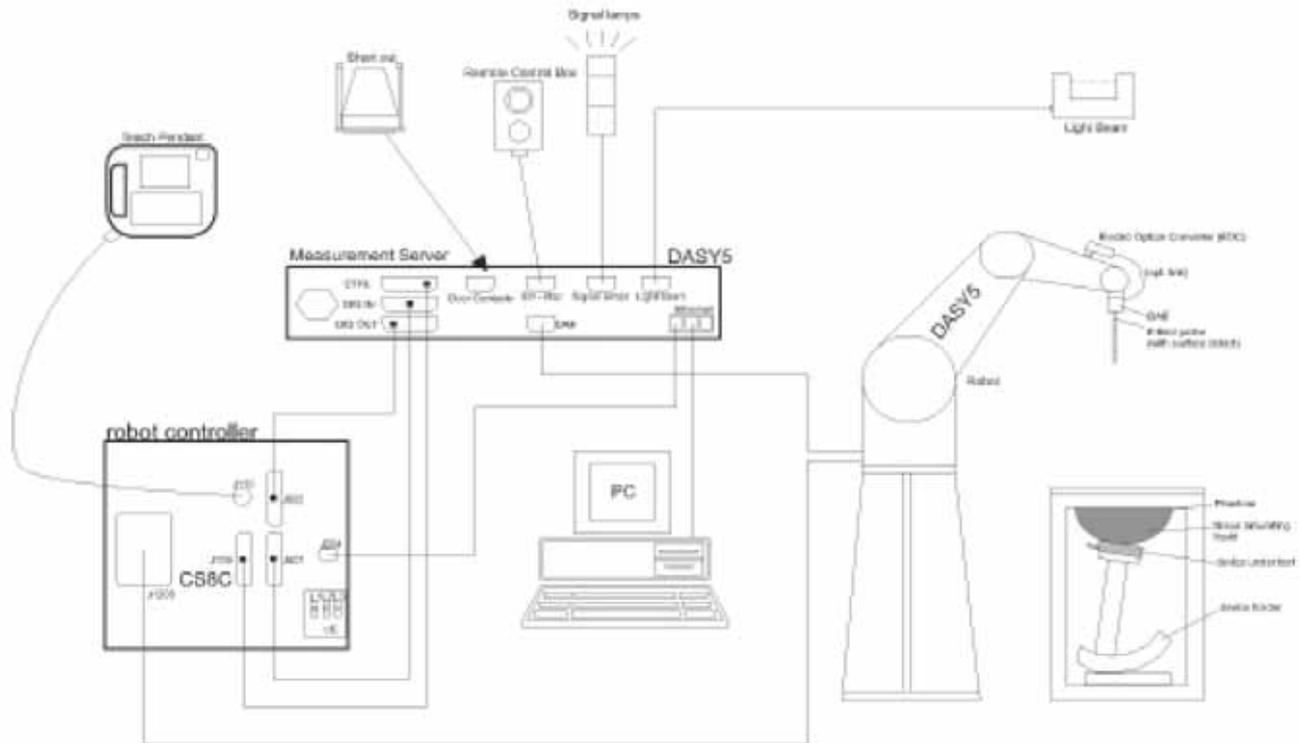


Fig. 5.1 DASY System

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (ECO) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remove control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Some of the components are described in details in the following sub-sections.

5.1 DASY E-Field Probe System

The SAR measurement is conducted with the dosimetric probe ET3DV6 (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

5.1.1 ET3DV6 E-Field Probe Specification

<ET3DV6>

| | |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction | Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents) |
| Frequency | 10 MHz to 3 GHz |
| Directivity | ± 0.2 dB in brain tissue (rotation around probe axis) ± 0.4 dB in brain tissue (rotation perpendicular to probe axis) |
| Dynamic Range | 5 μ W/g to > 100mW/g; Linearity: ±0.2dB |
| Surface Detection | ± 0.2 mm repeatability in air and clear liquids on reflecting surface |
| Dimensions | Overall length: 330mm Tip length: 16mm Body diameter: 12mm Tip diameter: 6.8mm Distance from probe tip to dipole centers: 2.7mm |
| Application | General dosimetry up to 3GHz Compliance tests for mobile phones and Wireless LAN Fast automatic scanning in arbitrary phantoms |

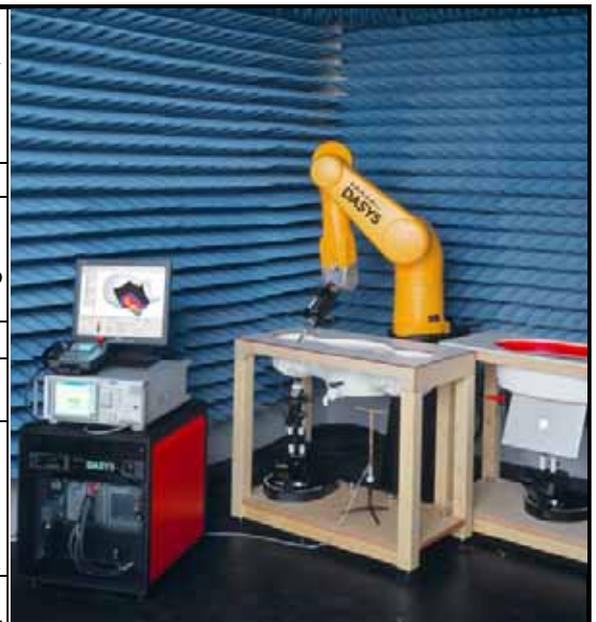


Fig. 5.2 Probe Setup on Robot

5.1.2 ET3DV6 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data are as below:

➤ **ET3DV6 sn1787**

| | | | | |
|--------------------------------------------|-----------------------------|-----------------------------|-----------------------------|---------------|
| Sensitivity | X axis : 1.63 μV | Y axis : 1.67 μV | Z axis : 2.18 μV | |
| Diode compression point | X axis : 90 mV | Y axis : 93 mV | Z axis : 92 mV | |
| Conversion factor (Head / Body) | Frequency (MHz) | X axis | Y axis | Z axis |
| | 1850~2050 | 5.01 / 4.49 | 5.01 / 4.49 | 5.01 / 4.49 |
| Boundary effect (Head / Body) | Frequency (MHz) | Alpha | Depth | |
| | 1850~2050 | 0.59 / 0.68 | 1.96 / 1.95 | |

NOTE: The probe parameters have been calibrated by the SPEAG.

5.2 DATA Acquisition Electronics (DAE)

The data acquisition electronics (DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE3 is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.

5.3 Robot

The DASY system uses the high precision robots TX90 XL type out of the newer series from Stäubli SA (France). For the 6-axis controller DASY system, the CS8C robot controller version from Stäubli is used. The XL robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller



5.4 Measurement Server

The DASY measurement server is based on a PC/104 CPU board with
400 MHz CPU
128 MB chipdisk and
128 MB RAM.

Communication with
the DAE4 electronic box
the 16-bit AD-converter system for optical detection and digital I/O interface.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.

5.5 SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left head
- Right head
- Flat phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

The phantom can be used with the following tissue simulating liquids:

*Water-sugar based liquid

*Glycol based liquids

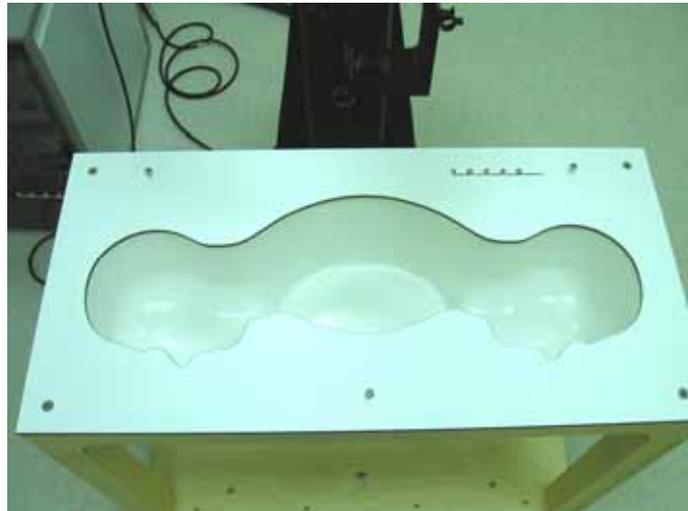


Fig. 5.3 Top View of Twin Phantom



Fig. 5.4 Bottom View of Twin Phantom

5.6 Device Holder for SAM Twin Phantom

The SAR in the Phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source in 5 mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. An accurate device position is therefore crucial for accurate and repeatable measurement. The position in which the devices must be measured, are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR).

Thus the device needs no repositioning when changing the angles.

The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon_r = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig. 5.5 Device Holder

5.7 Data Storage and Evaluation

5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

| | | |
|----------------------------|---------------------------|-------------------------------------------------------------------------|
| Probe parameters : | - Sensitivity | Norm _i , a _{i0} , a _{i1} , a _{i2} |
| | - Conversion factor | ConvF _i |
| | - Diode compression point | dcp _i |
| Device parameters : | - Frequency | f |
| | - Crest factor | cf |
| Media parameters : | - Conductivity | |
| | - Density | |

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i ($i = x, y, z$)
 U_i = input signal of channel i ($i = x, y, z$)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

E-field probes : $E_i = \sqrt{\frac{V_i}{Norm_i ConvF}}$

H-field probes : $H_i = \sqrt{V_i} \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$

with V_i = compensated signal of channel i ($i = x, y, z$)
 $Norm_i$ = sensor sensitivity of channel i ($i = x, y, z$)
 $\mu V/(V/m)^2$ for E-field Probes
 $ConvF$ = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

* Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m



5.8 Test Equipment List

| Manufacturer | Name of Equipment | Type/Model | Serial Number | Calibration | |
|--------------|---------------------------------|---------------|---------------|---------------|---------------|
| | | | | Last Cal. | Due Date |
| SPEAG | Dosimetric E-Filed Probe | ET3DV6 | 1787 | Aug. 26, 2008 | Aug. 25, 2009 |
| SPEAG | 1900MHz System Validation Kit | D1900V2 | 5d041 | Mar. 28, 2008 | Mar. 27, 2010 |
| SPEAG | Data Acquisition Electronics | DAE3 | 577 | Nov. 16, 2007 | Nov. 15, 2008 |
| SPEAG | Data Acquisition Electronics | DAE3 | 393 | Aug. 25, 2008 | Aug. 24, 2009 |
| SPEAG | Device Holder | N/A | N/A | NCR | NCR |
| SPEAG | SAM Phantom | QD 000 P40 C | TP-1303 | NCR | NCR |
| SPEAG | SAM Phantom | QD 000 P40 C | TP-1446 | NCR | NCR |
| SPEAG | SAM Phantom | QD 000 P40 C | TP-1383 | NCR | NCR |
| SPEAG | ELI4 Phantom | QD 0VA 001 BB | 1029 | NCR | NCR |
| Agilent | PNA Series Network Analyzer | E8358A | US40260131 | Apr. 02, 2008 | Apr. 01, 2009 |
| Agilent | Wireless Communication Test Set | E5515C | GB46311322 | Dec. 22, 2006 | Dec. 21, 2008 |
| Agilent | Dielectric Probe Kit | 85070D | US01440205 | NCR | NCR |
| Agilent | Dual Directional Coupler | 778D | 50422 | NCR | NCR |
| AR | Power Amplifier | 5S1G4M2 | 0328767 | NCR | NCR |
| R&S | Power Meter | NRVD | 101394 | Oct. 31, 2007 | Oct. 30, 2008 |
| R&S | Power Sensor | NRV-Z1 | 100130 | Oct. 31, 2007 | Oct. 30, 2008 |

Table 5.1 Test Equipment List

6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous tissue simulating liquid. The liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is (head SAR) or from the flat phantom to the liquid top surface (body SAR) is 15.2cm.

The following ingredients for tissue simulating liquid are used:

- **Water:** deionized water (pure H₂O), resistivity $\geq 16\text{M}\Omega$ - as basis for the liquid
- **Sugar:** refined sugar in crystals, as available in food shops – to reduce relative permittivity
- **Salt:** pure NaCl – to increase conductivity
- **Cellulose:** Hydroxyethyl-cellulose, medium viscosity (75-125 mPa.s, 2% in water, 20°C), CAS#54290-to increase viscosity and to keep sugar in solution.
- **Preservative:** Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS#55965-84-9- to prevent the spread of bacteria and molds.
- **DGMBE:** Deithlenglycol-monobuthyl ether (DGMBE), Fluka Chemie GmbH, CAS#112-34-5 – to reduce relative permittivity.

Table 6.1 gives the recipes for one liter of head and body tissue simulating liquid for frequency band 1900 MHz.

| Ingredient | HSL-1900 | MSL-1900 |
|-------------------------------------|---------------------------------------------|-------------------------------------------------|
| Water | 552.42 g | 716.56 g |
| Cellulose | 0 g | 0 g |
| Salt | 3.06 g | 4.0 g |
| Preventol D-7 | 0 g | 0 g |
| Sugar | 0 g | 0 g |
| DGMBE | 444.52 g | 300.67 g |
| Total amount | 1 liter (1.0 kg) | 1 liter (1.0 kg) |
| Dielectric Parameters at 22° | f= 1900 MHz r = 40.0±5%, = 1.4±5% S/m | f= 1900 MHz εr = 53.3±5 %, σ= 1.52±5% S/m |

Table 6.1 Recipes for Tissue Simulating Liquid

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.



Table 6.2 shows the measuring results for head and muscle simulating liquid.

| Band | Position | Temperature () | Frequency (MHz) | Conductivity (σ) | Permittivity (εr) | Measurement Date |
|--------------|----------|-----------------|-----------------|------------------|-------------------|------------------|
| CDMA2000 PCS | Head | 21.6 | 1851.25 | 1.35 | 41.9 | Sep. 23, 2008 |
| | | | 1880.00 | 1.39 | 41.8 | |
| | | | 1908.75 | 1.43 | 41.9 | |
| | Body | 21.7 | 1851.25 | 1.45 | 54.5 | Sep. 24, 2008 |
| | | | 1880.00 | 1.47 | 54.4 | |
| | | | 1908.75 | 1.53 | 53.7 | |

Table 6.2 Measuring Results for Simulating Liquid

The measuring data are consistent with $r = 40.0 \pm 5\%$ and $\epsilon_r = 1.4 \pm 5\%$ for head CDMA2000 PCS, and $r = 53.3 \pm 5\%$ and $\epsilon_r = 1.52 \pm 5\%$ for body CDMA2000 PCS.

7. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 6.1

| Uncertainty Distributions | Normal | Rectangular | Triangular | U-shape |
|-----------------------------------|--------------------|-------------|------------|---------|
| Multiplying factor ^(a) | 1/k ^(b) | 1/ 3 | 1/ 6 | 1/ 2 |

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) is the coverage factor

Table 7.1 Multiplying Fractions for Various Distributions

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is showed in Table 7.2.



| Error Description | Uncertainty Value ± % | Probability Distribution | Divisor | Ci (1g) | Standard Unc. (1g) | vi or Veff |
|---------------------------------------------------|-----------------------|--------------------------|---------|---------|--------------------|------------|
| Measurement Equipment | | | | | | |
| Probe Calibration | ±5.9 % | Normal | 1 | 1 | ±5.9 % | ∞ |
| Axial Isotropy | ±4.7 % | Rectangular | √3 | 0.7 | ±1.9 % | ∞ |
| Hemispherical Isotropy | ±9.6 % | Rectangular | √3 | 0.7 | ±3.9 % | ∞ |
| Boundary Effects | ±1.0 % | Rectangular | √3 | 1 | ±0.6 % | ∞ |
| Linearity | ±4.7 % | Rectangular | √3 | 1 | ±2.7 % | ∞ |
| System Detection Limits | ±1.0 % | Rectangular | √3 | 1 | ±0.6 % | ∞ |
| Readout Electronics | ±0.3 % | Normal | 1 | 1 | ±0.3 % | ∞ |
| Response Time | ±0.8 % | Rectangular | √3 | 1 | ±0.5 % | ∞ |
| Integration Time | ±2.6 % | Rectangular | √3 | 1 | ±1.5 % | ∞ |
| RF Ambient Noise | ±3.0 % | Rectangular | √3 | 1 | ±1.7 % | ∞ |
| RF Ambient Reflections | ±3.0 % | Rectangular | √3 | 1 | ±1.7 % | ∞ |
| Probe Positioner | ±0.4 % | Rectangular | √3 | 1 | ±0.2 % | ∞ |
| Probe Positioning | ±2.9 % | Rectangular | √3 | 1 | ±1.7 % | ∞ |
| Max. SAR Eval. | ±1.0 % | Rectangular | √3 | 1 | ±0.6 % | ∞ |
| Test Sample Related | | | | | | |
| Device Positioning | ±2.9 % | Normal | 1 | 1 | ±2.9 | 145 |
| Device Holder | ±3.6 % | Normal | 1 | 1 | ±3.6 | 5 |
| Power Drift | ±5.0 % | Rectangular | √3 | 1 | ±2.9 | ∞ |
| Phantom and Setup | | | | | | |
| Phantom Uncertainty | ±4.0 % | Rectangular | √3 | 1 | ±2.3 | ∞ |
| Liquid Conductivity (target) | ±5.0 % | Rectangular | √3 | 0.64 | ±1.8 | ∞ |
| Liquid Conductivity (meas.) | ±2.5 % | Normal | 1 | 0.64 | ±1.6 | ∞ |
| Liquid Permittivity (target) | ±5.0 % | Rectangular | √3 | 0.6 | ±1.7 | ∞ |
| Liquid Permittivity (meas.) | ±2.5 % | Normal | 1 | 0.6 | ±1.5 | ∞ |
| Combined Standard Uncertainty | | | | | ±10.9 | 387 |
| Coverage Factor for 95 % | | K=2 | | | | |
| Expanded uncertainty (Coverage factor = 2) | | | | | ±21.9 | |

Table 7.2 Uncertainty Budget of DASYS

8. SAR Measurement Evaluation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

8.1 Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

8.2 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator at frequency 1900 MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

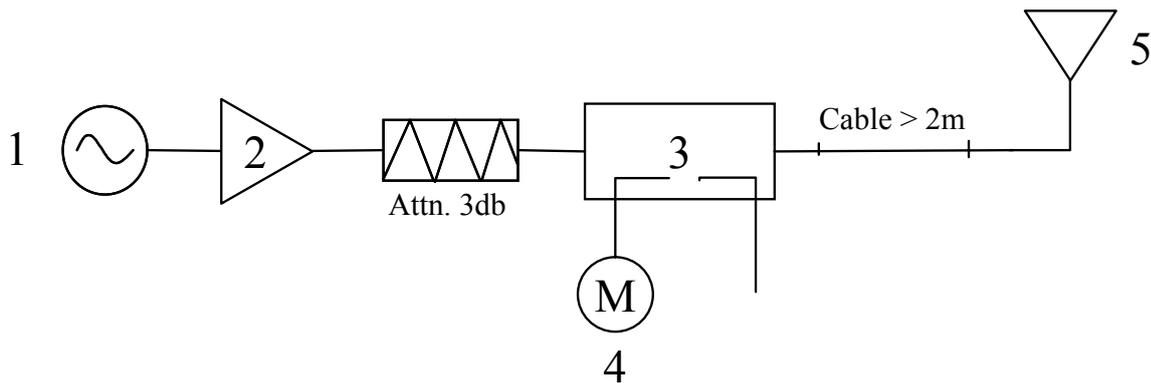


Fig. 8.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. 1900 MHz Dipole

The output power on dipole port must be calibrated to 20dBm (100mW) before dipole is connected.



Fig 8.2 Dipole Setup



8.3 Validation Results

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 %. Table 8.1 shows the target SAR and measured SAR after normalized to 1W input power.

| Frequency | Position | SAR | Target (W/kg) | Measurement data (W/kg) | Variation | Measurement Date |
|-----------|----------|-----------|---------------|-------------------------|-----------|------------------|
| 1900MHz | Head | SAR (1g) | 39.5 | 39.7 | 0.5 % | Sep. 23, 2008 |
| | | SAR (10g) | 20.6 | 20.7 | 0.5 % | |
| | Body | SAR (1g) | 40.1 | 37.5 | -6.5 % | Sep. 24, 2008 |
| | | SAR (10g) | 21.3 | 19.9 | -6.6 % | |

Table 8.1 Target and Measurement Data Comparison

The table above indicates the system performance check can meet the variation criterion.

9. Description for DUT Testing Position

This DUT was tested in six different positions. They are left cheek, left tilted, right cheek, right tilted, face with 1.5cm Gap and bottom with 1.5cm Gap as illustrated below:

- 1) “Cheek Position”
 - i) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M, RE and LE) and align the center of the ear piece with the line RE-LE.
 - ii) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 9.1).
- 2) “Tilted Position”
 - i) To position the device in the “cheek” position described above.
 - ii) While maintaining the device the reference planes described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 9.2).
- 3) “Body Worn”
 - i) To position the device parallel to the phantom surface.
 - ii) To adjust the phone parallel to the flat phantom.
 - iii) To adjust the distance between the DUT surface and the flat phantom to 1.5 cm.

Remark: Refer to Appendix F for the test setup photos.

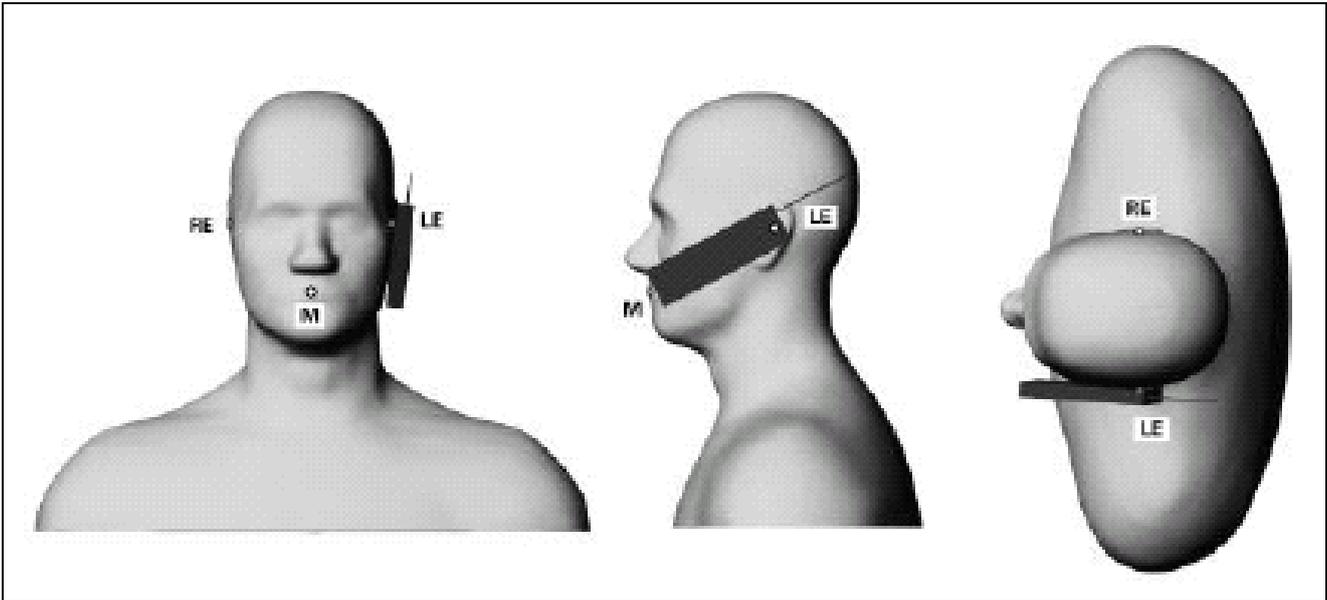


Fig. 9.1 Phone Position 1, “Cheek” or “Touch” Position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the plane for phone positioning, are indicated.

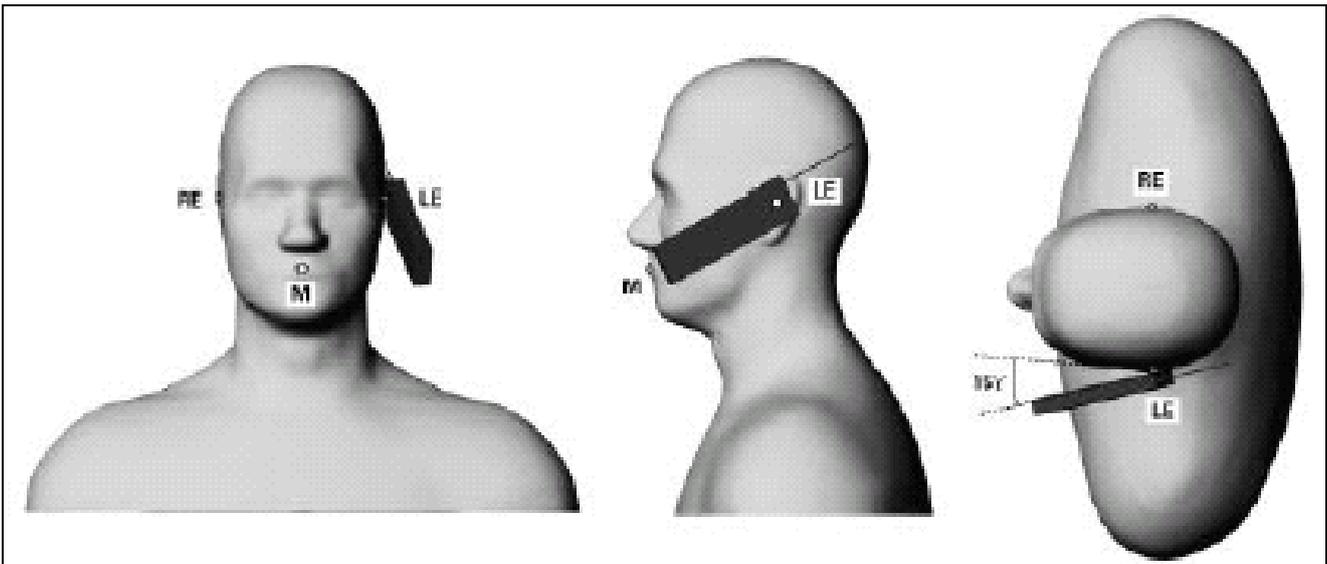


Fig. 9.2 Phone Position 2, “Tilted Position”. The reference point for the right ear (RE), left ear (LE) and mouth (M), which define the plane for phone positioning, are indicated.

10. Measurement Procedures

The measurement procedures are as follows:

- Linking DUT with base station emulator CMU200 in middle channel
- Setting CMU200 to allow DUT to radiate maximum output power
- Measuring output power through RF cable and power meter
- Placing the DUT in the positions described in the last section
- Setting scan area, grid size and other setting on the DASY software
- Taking data for the lowest, middle, and highest channel on each testing position

According to the IEEE P1528 standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power reference measurement

10.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1528-2003 standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

Base on the Draft: SCC-34, SC-2, WG-2-Computational Dosimetry, IEEE P1528/D1.2 (Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques), a new algorithm has been implemented. The spatial-peak SAR can be computed over any required mass.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.



The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- extraction of the measured data (grid and values) from the Zoom Scan
- calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- generation of a high-resolution mesh within the measured volume

- interpolation of all measured values from the measurement grid to the high-resolution grid
- extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- calculation of the averaged SAR within masses of 1g and 10g

10.2 Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 1 g.

10.3 SAR Averaged Methods

In DASy, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.



11. SAR Test Results

11.1 Conducted Power

| Mode \ Channel | Band | CDMA2000 PCS (dBm) | | |
|----------------|------|--------------------|-------|-------|
| | | 25 | 600 | 1175 |
| RC1 | | 23.26 | 23.34 | 23.40 |
| RC3 | | 23.22 | 23.27 | 23.33 |
| FCH_RC3+SCH | | 23.28 | 23.34 | 23.42 |

11.2 Test Records for Head SAR Test

| Position | Band | Mode | Chan. | Freq. (MHz) | Modulation Type | Measured 1g SAR (W/kg) | Limit (W/kg) | Result |
|--------------|--------------|----------|-------|-------------|-----------------|------------------------|--------------|--------|
| Right Cheek | CDMA2000 PCS | RC1_SO55 | 600 | 1880.00 | QPSK | 1 | 1.6 | Pass |
| Right Cheek | CDMA2000 PCS | RC3_SO55 | 600 | 1880.00 | QPSK | 1.01 | 1.6 | Pass |
| Right Tilted | CDMA2000 PCS | RC3_SO55 | 600 | 1880.00 | QPSK | 0.240 | 1.6 | Pass |
| Left Cheek | CDMA2000 PCS | RC3_SO55 | 600 | 1880.00 | QPSK | 1.3 | 1.6 | Pass |
| Left Tilted | CDMA2000 PCS | RC3_SO55 | 600 | 1880.00 | QPSK | 0.270 | 1.6 | Pass |
| Right Cheek | CDMA2000 PCS | RC3_SO55 | 25 | 1851.25 | QPSK | 1.08 | 1.6 | Pass |
| Right Cheek | CDMA2000 PCS | RC3_SO55 | 1175 | 1908.75 | QPSK | 0.978 | 1.6 | Pass |
| Left Cheek | CDMA2000 PCS | RC3_SO55 | 25 | 1851.25 | QPSK | 1.45 | 1.6 | Pass |
| Left Cheek | CDMA2000 PCS | RC3_SO55 | 1175 | 1908.75 | QPSK | 1.32 | 1.6 | Pass |

11.3 Test Records for Body SAR Test

| Position | Band | Mode | Chan. | Freq. (MHz) | Modulation Type | Measured 1g SAR (W/kg) | Limit (W/kg) | Result |
|-----------------------|--------------|-------------|-------|-------------|-----------------|------------------------|--------------|--------|
| Bottom With 1.5cm Gap | CDMA2000 PCS | RC1_SO55 | 600 | 1880.00 | QPSK | 0.279 | 1.6 | Pass |
| Face With 1.5cm Gap | CDMA2000 PCS | RC1_SO55 | 600 | 1880.00 | QPSK | 0.531 | 1.6 | Pass |
| Face With 1.5cm Gap | CDMA2000 PCS | RC3_SO55 | 600 | 1880.00 | QPSK | 0.533 | 1.6 | Pass |
| Face With 1.5cm Gap | CDMA2000 PCS | FCH_SCH_RC3 | 600 | 1851.25 | QPSK | 0.516 | 1.6 | Pass |
| Face With 1.5cm Gap | CDMA2000 PCS | RC3_SO55 | 25 | 1908.75 | QPSK | 0.561 | 1.6 | Pass |
| Face With 1.5cm Gap | CDMA2000 PCS | RC3_SO55 | 1175 | 1851.25 | QPSK | 0.723 | 1.6 | Pass |

Remark: Test Engineer : Eric Huang and A-Rod Chen



12. References

- [1] RSS-102 Issued 2, “Radio Frequency Exposure Compliance of Radio Communication Apparatus (All Frequency Bands)”, November 2005
- [2] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [3] IEEE Std. P1528-2003, “Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, April 21, 2003
- [4] Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01), “Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to RF Emissions”, June 2001
- [5] IEEE Std. C95.3-2002, “IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields-RF and Microwave”, 2002
- [6] IEEE Std. C95.1-1999, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, 1999
- [7] Robert J. Renka, “Multivariate Interpolation Of Large Sets Of Scattered Data”, University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148
- [8] DASY System Handbook



Appendix A - System Performance Check Data

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/9/23

System Check_Head_1900MHz_20080923

DUT: Dipole 1900 MHz


Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: HSL_1900 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : 22.1 °C; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.01, 5.01, 5.01); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2007/11/16
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Pin=100mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 4.77 mW/g

Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 58.2 V/m; Power Drift = 0.001 dB
Peak SAR (extrapolated) = 7.31 W/kg
SAR(1 g) = 3.97 mW/g; SAR(10 g) = 2.07 mW/g
Maximum value of SAR (measured) = 4.44 mW/g

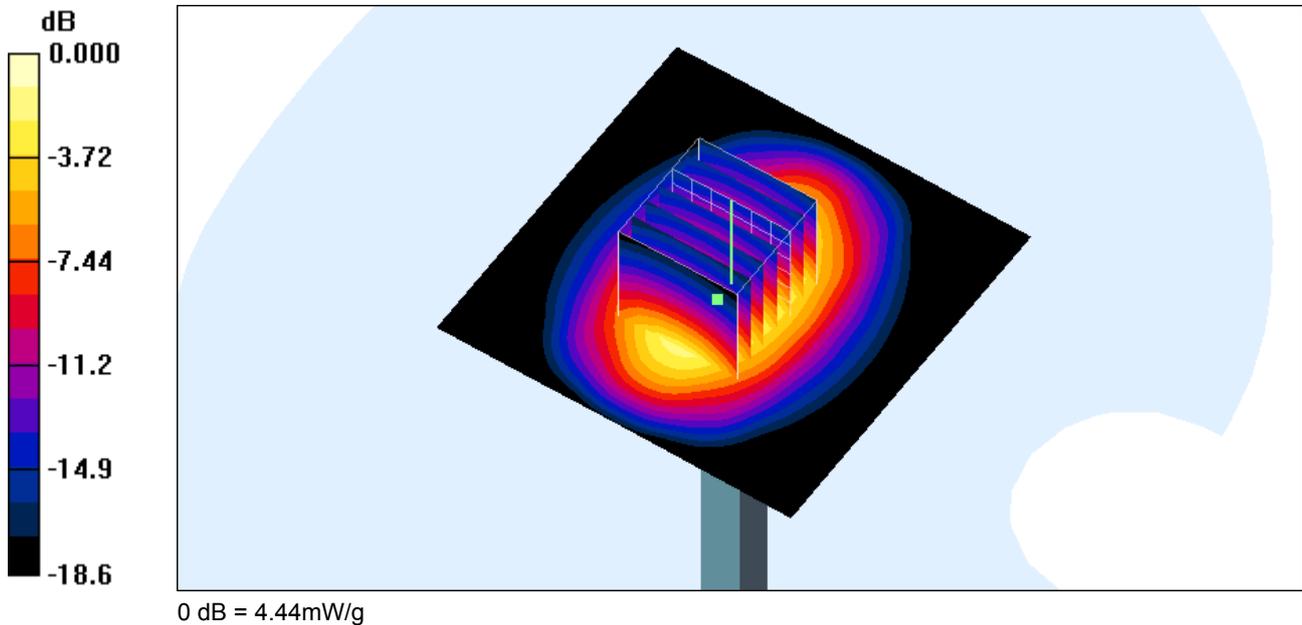

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/9/24

System Check_Body_1900MHz

DUT: Dipole 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 ; Liquid Temperature : 21.7

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.49, 4.49, 4.49); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 2008/8/25
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

Pin=100mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 4.39 mW/g


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.8 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 6.76 W/kg

SAR(1 g) = 3.75 mW/g; SAR(10 g) = 1.99 mW/g

Maximum value of SAR (measured) = 4.23 mW/g

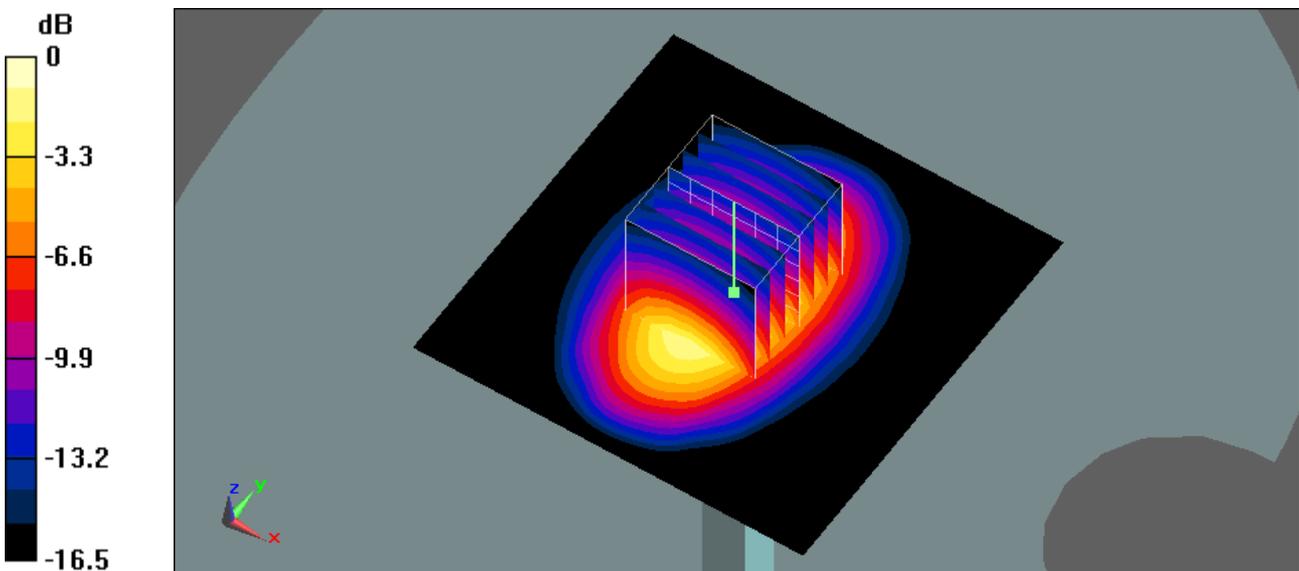

0 dB = 4.23mW/g



Appendix B - SAR Measurement Data

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/9/24

Right Cheek_CDMA1900 Ch25_RC3_SO55

DUT: 890805

Communication System: CDMA ; Frequency: 1851.25 MHz;Duty Cycle: 1:1
Medium: HSL_1900 Medium parameters used: $f = 1851.25$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.1 °C; Liquid Temperature : 21.6 °C


DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.01, 5.01, 5.01); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2007/11/16
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Ch25/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.19 mW/g

Ch25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.73 V/m; Power Drift = -0.074 dB
Peak SAR (extrapolated) = 1.63 W/kg
SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.671 mW/g

Maximum value of SAR (measured) = 1.13 mW/g

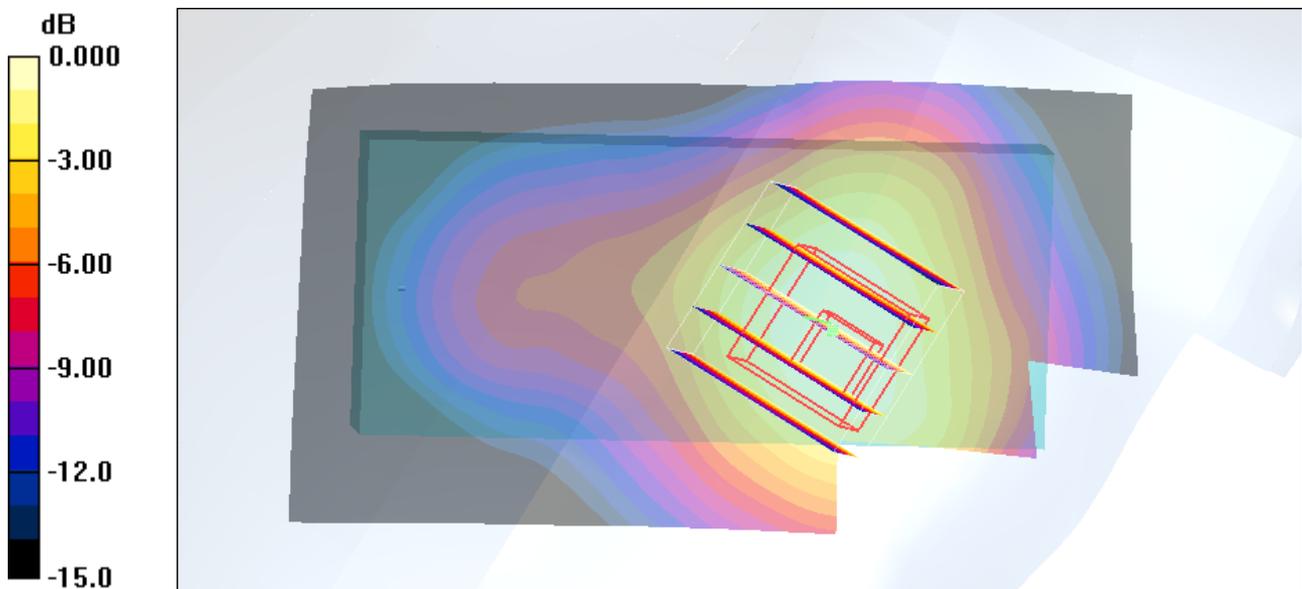

0 dB = 1.13mW/g



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/9/24

Right Tilted_CDMA1900 Ch600_RC3_SO55

DUT: 890805


Communication System: CDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium: HSL_1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 41.8$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : 22.1 °C; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.01, 5.01, 5.01); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2007/11/16
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Ch600/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.270 mW/g

Ch600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.8 V/m; Power Drift = 0.123 dB
Peak SAR (extrapolated) = 0.362 W/kg
SAR(1 g) = 0.240 mW/g; SAR(10 g) = 0.151 mW/g
Maximum value of SAR (measured) = 0.259 mW/g

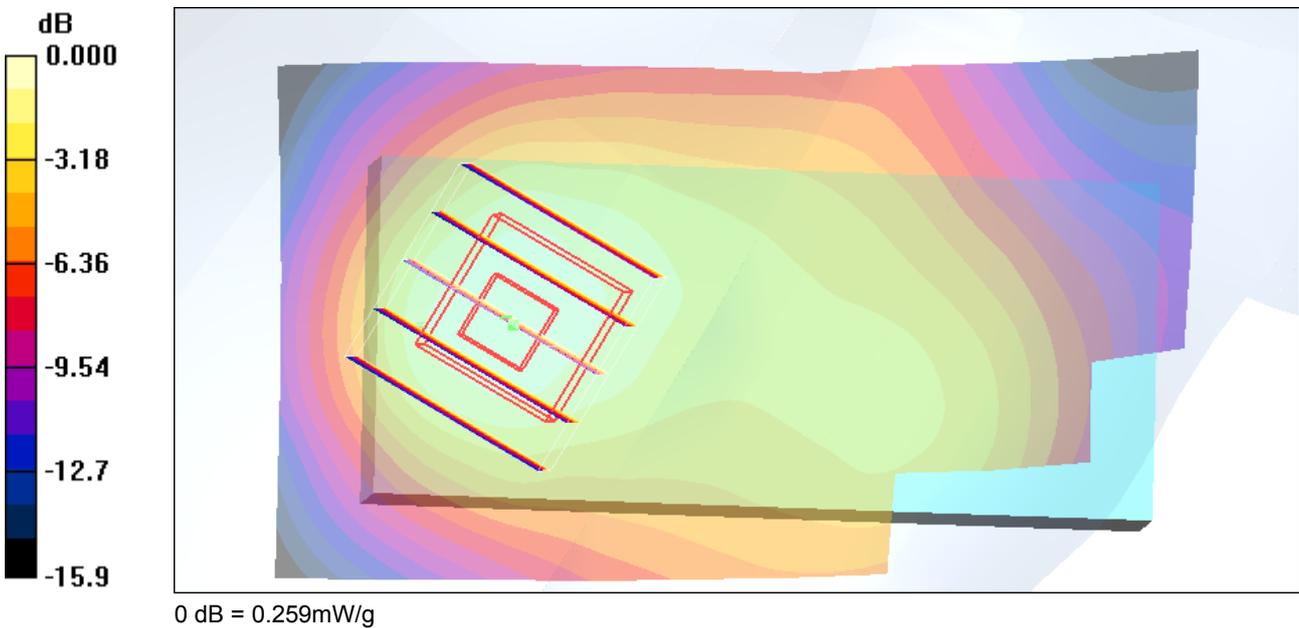



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/9/23

Left Cheek_CDMA1900 Ch25_RC3_SO55

DUT: 890805


Communication System: CDMA ; Frequency: 1851.25 MHz;Duty Cycle: 1:1
Medium: HSL_1900 Medium parameters used: f = 1851.25 MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.3 °C; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.01, 5.01, 5.01); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2007/11/16
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Ch25/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.54 mW/g

Ch25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.14 V/m; Power Drift = 0.015 dB
Peak SAR (extrapolated) = 2.40 W/kg
SAR(1 g) = 1.45 mW/g; SAR(10 g) = 0.829 mW/g
Maximum value of SAR (measured) = 1.60 mW/g

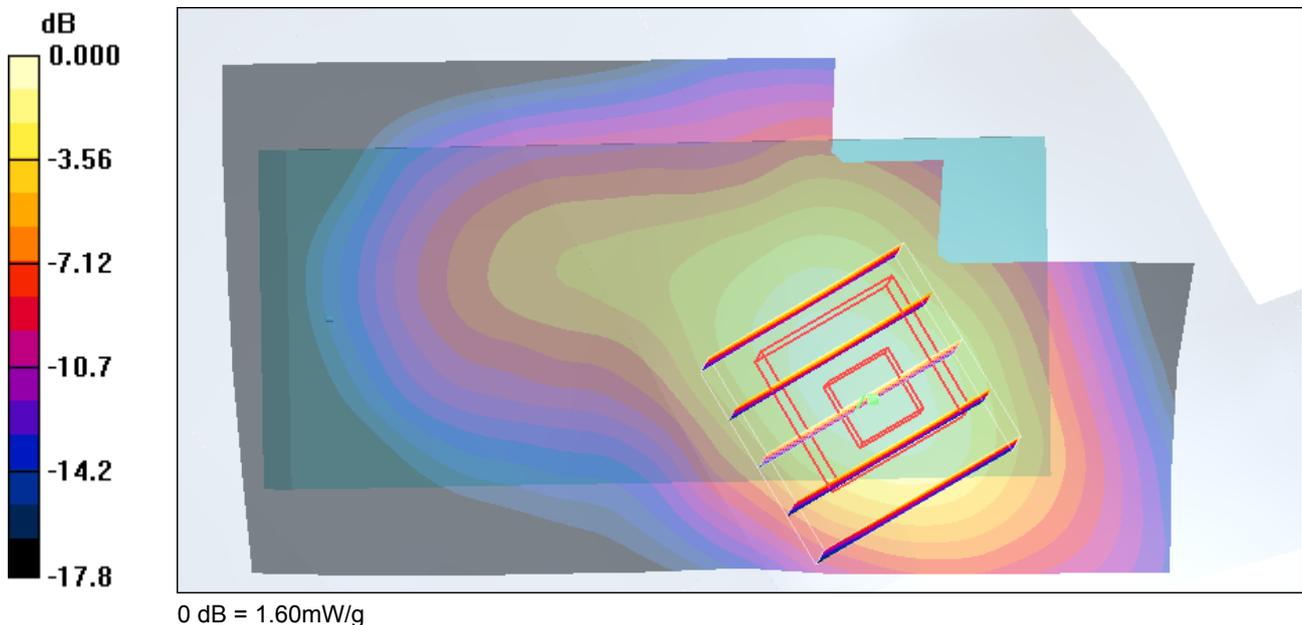



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/9/24

Left Tilted_CDMA1900 Ch600_RC3_SO55

DUT: 890805


Communication System: CDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium: HSL_1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 41.8$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : 22.2 °C; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.01, 5.01, 5.01); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2007/11/16
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Ch600/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.309 mW/g

Ch600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.7 V/m; Power Drift = 0.122 dB
Peak SAR (extrapolated) = 0.395 W/kg
SAR(1 g) = 0.270 mW/g; SAR(10 g) = 0.174 mW/g
Maximum value of SAR (measured) = 0.287 mW/g

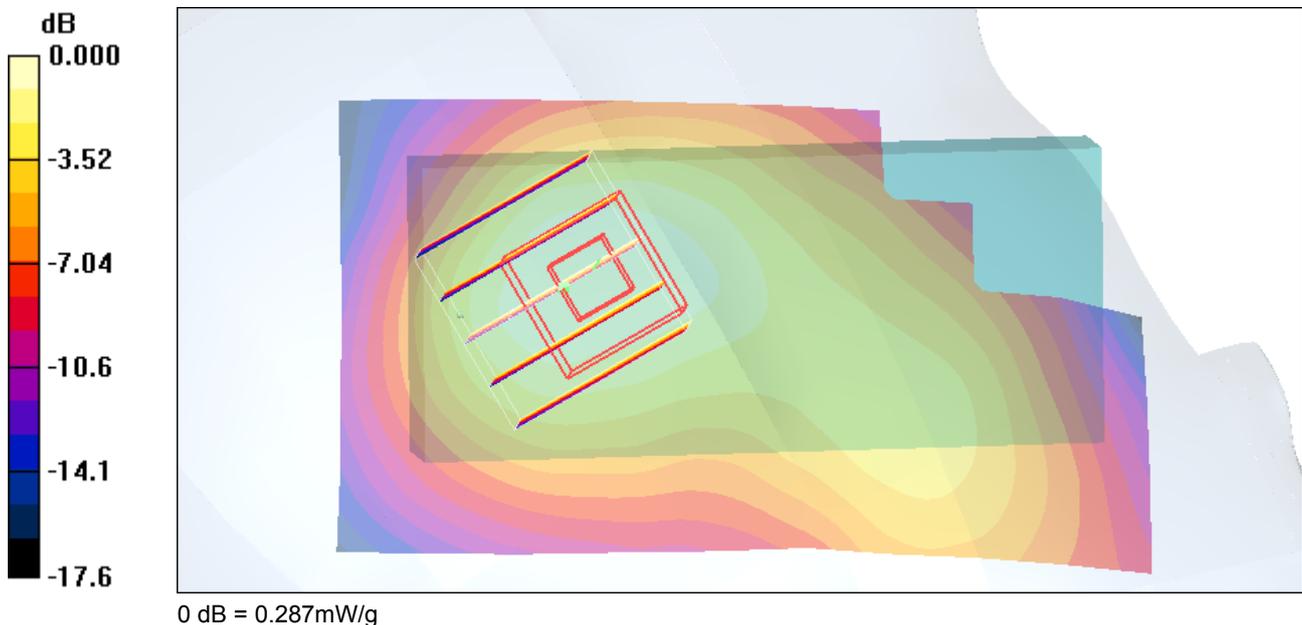



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/9/24

Body_CDMA1900 Ch1175_Face with 1.5cm Gap_RC3_SO55

DUT: 890805


Communication System: CDMA ; Frequency: 1908.75 MHz;Duty Cycle: 1:1
Medium: MSL_1900 Medium parameters used: $f = 1909$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.5 ; Liquid Temperature : 21.7

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.49, 4.49, 4.49); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 2008/8/25
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

Ch1175/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.789 mW/g

Ch1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.3 V/m; Power Drift = -0.151 dB
Peak SAR (extrapolated) = 1.34 W/kg
SAR(1 g) = 0.723 mW/g; SAR(10 g) = 0.411 mW/g
Maximum value of SAR (measured) = 0.772 mW/g

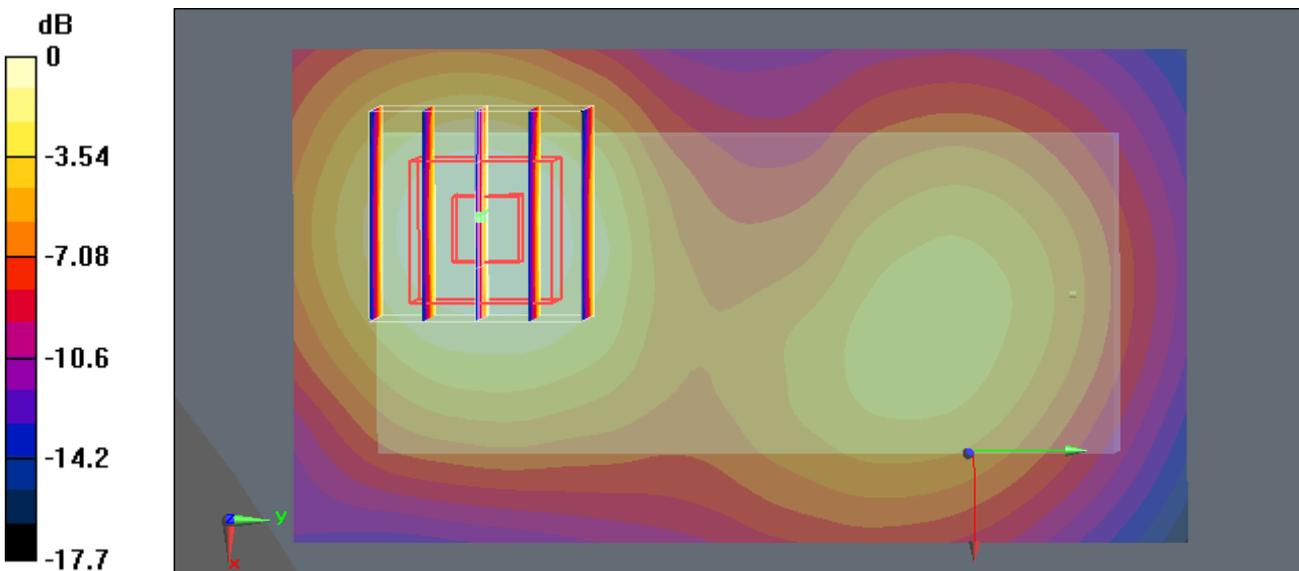

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/9/24

Body_CDMA1900 Ch600_Bottom with 1.5cm Gap_RC1_SO55

DUT: 890805

Communication System: CDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium: MSL_1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.5 ; Liquid Temperature : 21.7


DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.49, 4.49, 4.49); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 2008/8/25
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

Ch600/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.311 mW/g

Ch600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.41 V/m; Power Drift = 0.112 dB
Peak SAR (extrapolated) = 0.473 W/kg
SAR(1 g) = 0.279 mW/g; SAR(10 g) = 0.166 mW/g
Maximum value of SAR (measured) = 0.297 mW/g

Ch600/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.41 V/m; Power Drift = 0.112 dB
Peak SAR (extrapolated) = 0.306 W/kg
SAR(1 g) = 0.187 mW/g; SAR(10 g) = 0.115 mW/g
Maximum value of SAR (measured) = 0.198 mW/g

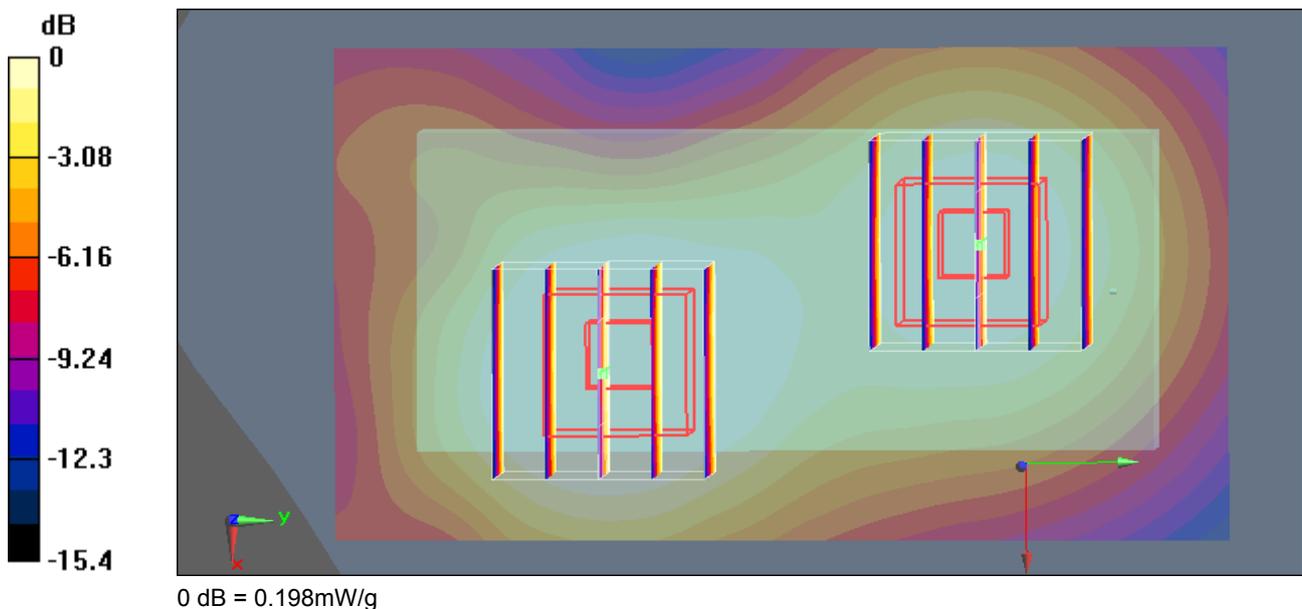



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/9/23

Left Cheek_CDMA1900 Ch25_RC3_SO55_2D

DUT: 890805


Communication System: CDMA ; Frequency: 1851.25 MHz;Duty Cycle: 1:1
Medium: HSL_1900 Medium parameters used: $f = 1851.25$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.3 ; Liquid Temperature : 21.6

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.01, 5.01, 5.01); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2007/11/16
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Ch25/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.54 mW/g

Ch25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.14 V/m; Power Drift = 0.015 dB
Peak SAR (extrapolated) = 2.40 W/kg
SAR(1 g) = 1.45 mW/g; SAR(10 g) = 0.829 mW/g
Maximum value of SAR (measured) = 1.60 mW/g

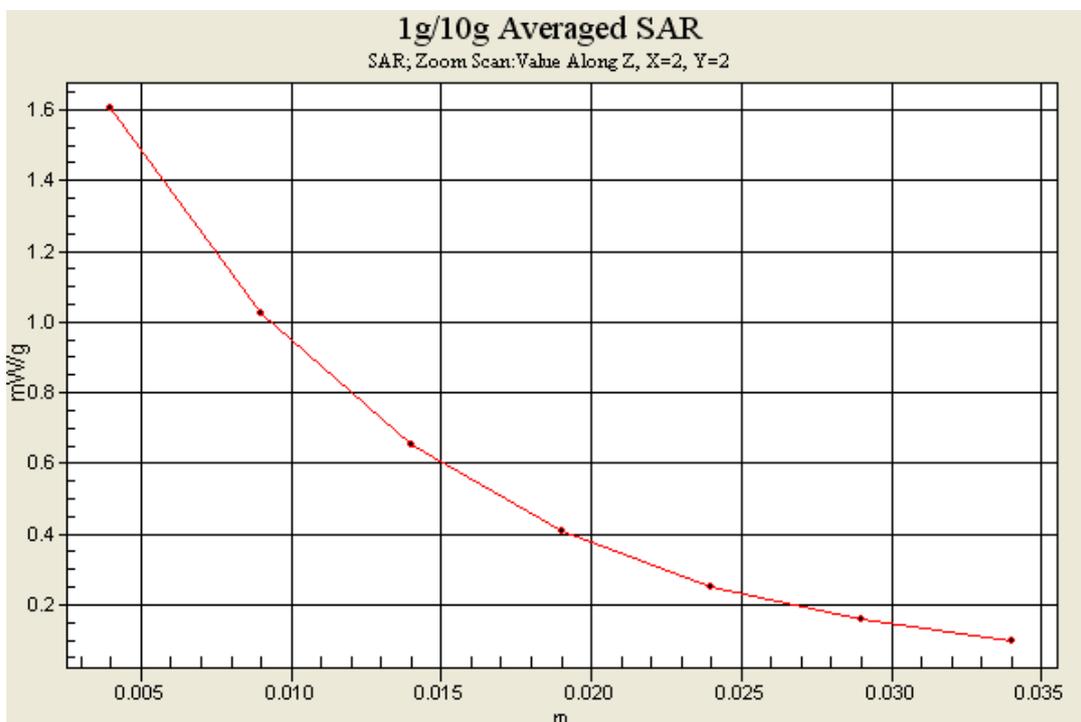



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/9/24

Body_CDMA1900 Ch1175_Face with 1.5cm Gap_RC3_SO55_2D

DUT: 890805


Communication System: CDMA ; Frequency: 1908.75 MHz;Duty Cycle: 1:1
Medium: MSL_1900 Medium parameters used: f = 1909 MHz; sigma = 1.53 mho/m; epsilon_r = 53.7; rho = 1000 kg/m^3
Ambient Temperature : 22.5 ; Liquid Temperature : 21.7

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.49, 4.49, 4.49); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 2008/8/25
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

Ch1175/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.789 mW/g

Ch1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.3 V/m; Power Drift = -0.151 dB
Peak SAR (extrapolated) = 1.34 W/kg
SAR(1 g) = 0.723 mW/g; SAR(10 g) = 0.411 mW/g
Maximum value of SAR (measured) = 0.772 mW/g

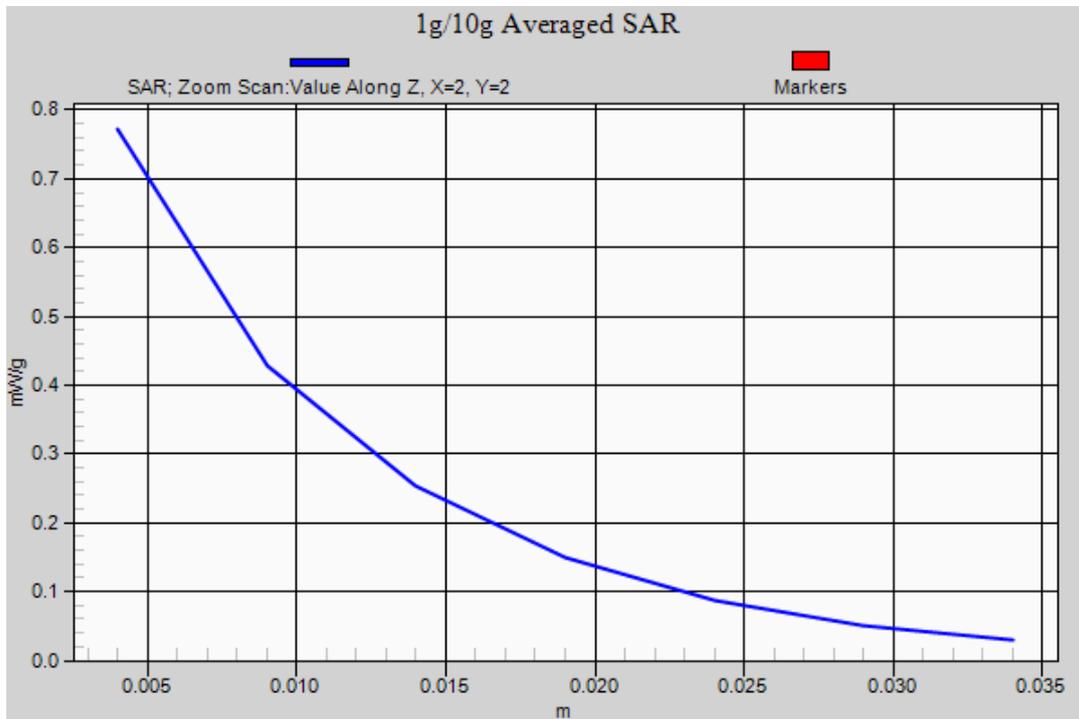



Appendix C – Calibration Data

Calibration Laboratory of Schmid & Partner Engineering AG, Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst, C Service suisse d'étalonnage, S Servizio svizzero di taratura, S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation. The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Sporton (Auden)

Certificate No: D1900V2-5d041_Mar08

CALIBRATION CERTIFICATE

Object: D1900V2 - SN: 5d041
Calibration procedure(s): QA CAL-05.v7 Calibration procedure for dipole validation kits
Calibration date: March 18, 2008
Condition of the calibrated item: In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Table with 4 columns: Primary Standards, ID #, Cal Date (Calibrated by, Certificate No.), Scheduled Calibration. Includes items like Power meter EPM-442A, Power sensor HP 8481A, Reference 20 dB Attenuator, etc.

Calibrated by: Marcel Fahr, Laboratory Technician
Approved by: Katja Pokovic, Technical Manager

Issued: March 18, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.



Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------|---------------------------|-------------|
| DASY Version | DASY4 | V4.7 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom V5.0 | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 1900 MHz ± 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|----------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.0 °C | 40.0 | 1.40 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 40.2 ± 6 % | 1.47 mho/m ± 6 % |
| Head TSL temperature during test | (21.1 ± 0.2) °C | --- | --- |

SAR result with Head TSL

| SAR averaged over 1 cm ³ (1 g) of Head TSL | condition | |
|-------------------------------------------------------|--------------------|----------------------------|
| SAR measured | 250 mW input power | 10.1 mW / g |
| SAR normalized | normalized to 1W | 40.4 mW / g |
| SAR for nominal Head TSL parameters ¹ | normalized to 1W | 39.5 mW / g ± 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Head TSL | Condition | |
|---------------------------------------------------------|--------------------|----------------------------|
| SAR measured | 250 mW input power | 5.20 mW / g |
| SAR normalized | normalized to 1W | 20.8 mW / g |
| SAR for nominal Head TSL parameters ¹ | normalized to 1W | 20.6 mW / g ± 16.5 % (k=2) |

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|----------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters | 22.0 °C | 53.3 | 1.52 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 51.6 ± 6 % | 1.57 mho/m ± 6 % |
| Body TSL temperature during test | (21.4 ± 0.2) °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm ³ (1 g) of Body TSL | Condition | |
|-------------------------------------------------------|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 10.4 mW / g |
| SAR normalized | normalized to 1W | 41.6 mW / g |
| SAR for nominal Body TSL parameters ² | normalized to 1W | 40.1 mW / g ± 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Body TSL | condition | |
|---------------------------------------------------------|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 5.44 mW / g |
| SAR normalized | normalized to 1W | 21.8 mW / g |
| SAR for nominal Body TSL parameters ² | normalized to 1W | 21.3 mW / g ± 16.5 % (k=2) |

² Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"



Appendix

Antenna Parameters with Head TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 54.0 Ω + 5.1 j Ω |
| Return Loss | - 24.2 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 48.0 Ω + 6.1 j Ω |
| Return Loss | - 23.6 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.199 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|---------------|
| Manufactured by | SPEAG |
| Manufactured on | July 04, 2003 |

DASY4 Validation Report for Head TSL

Date/Time: 18.03.2008 12:05:10

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d041

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U10 BB;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(4.9, 4.9, 4.9); Calibrated: 01.03.2008
- Sensor-Surface: 3.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn909; Calibrated: 03.09.2007
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; ;
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 172

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.7 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 19.1 W/kg

SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.2 mW/g


Maximum value of SAR (measured) = 11.8 mW/g

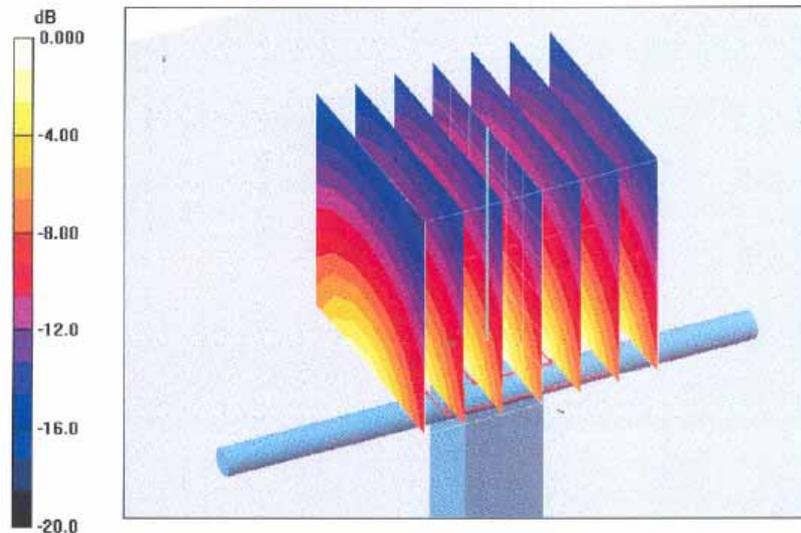

0 dB = 11.8mW/g



Impedance Measurement Plot for Head TSL

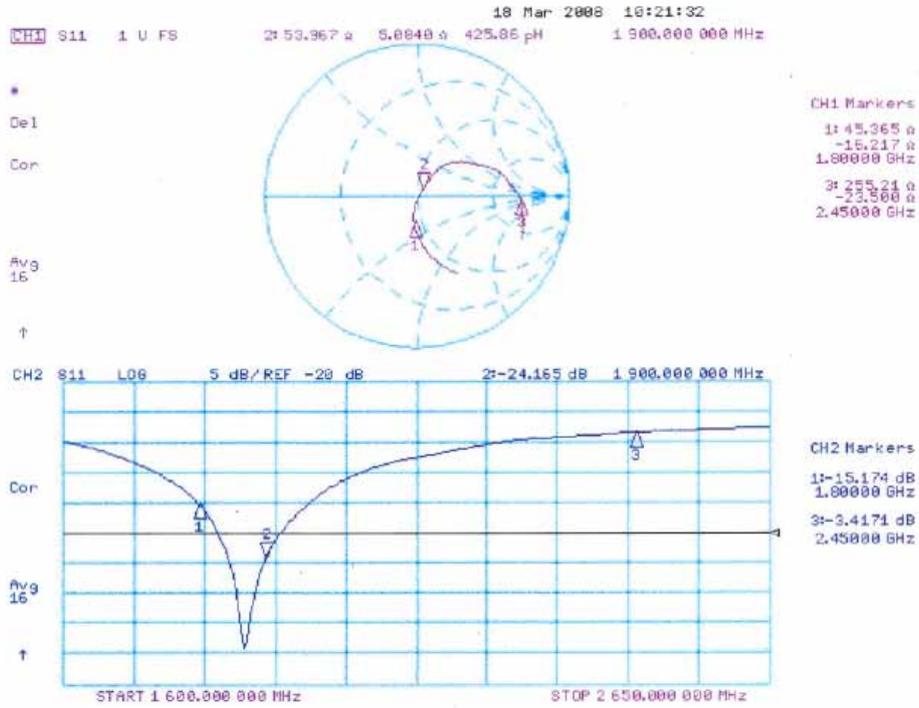

DASY4 Validation Report for Body TSL

Date/Time: 14.03.2008 13:22:24

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d041

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U10 BB;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(4.5, 4.5, 4.5); Calibrated: 01.03.2008
- Sensor-Surface: 3.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn909; Calibrated: 03.09.2007
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; ;
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 172

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.7 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 18.6 W/kg

SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.44 mW/g


Maximum value of SAR (measured) = 12.0 mW/g

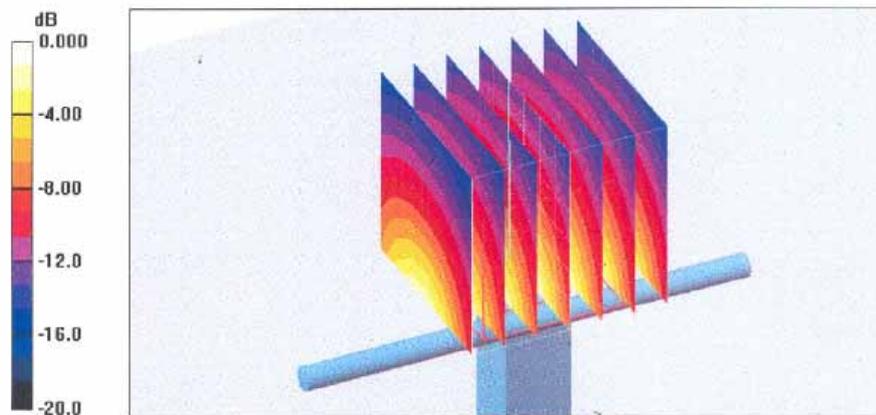

0 dB = 12.0mW/g



Impedance Measurement Plot for Body TSL

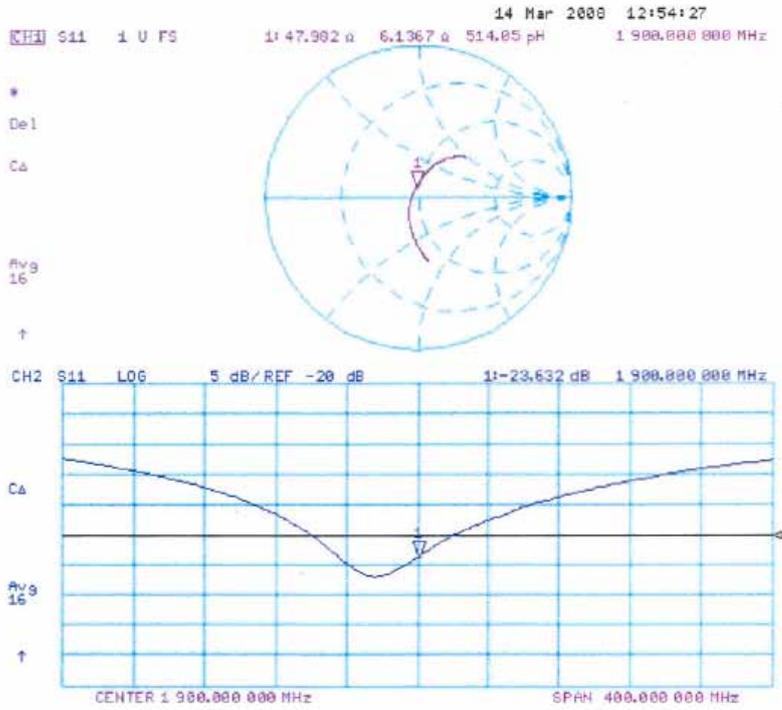



Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'etalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Sporton (Auden)

Certificate No: DAE3-577_Nov07

CALIBRATION CERTIFICATE

Object: DAE3 - SD 000 D03 AA - SN: 577
Calibration procedure(s): QA CAL-06.v12 Calibration procedure for the data acquisition electronics (DAE)
Calibration date: November 16, 2007
Condition of the calibrated item: In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Table with 4 columns: Primary Standards, ID #, Cal Date (Calibrated by, Certificate No.), Scheduled Calibration. Rows include Fluke Process Calibrator Type 702, Keithley Multimeter Type 2001, Secondary Standards, and Calibrator Bcx V1.1.

Calibrated by: Dominique Steffen, Technician, Signature
Approved by: Fin Bomholt, R&D Director, Signature

Issued: November 16, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - *DC Voltage Measurement Linearity:* Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - *Common mode sensitivity:* Influence of a positive or negative common mode voltage on the differential measurement.
 - *Channel separation:* Influence of a voltage on the neighbor channels not subject to an input voltage.
 - *AD Converter Values with inputs shorted:* Values on the internal AD converter corresponding to zero input voltage
 - *Input Offset Measurement:* Output voltage and statistical results over a large number of zero voltage measurements.
 - *Input Offset Current:* Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - *Input resistance:* DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - *Low Battery Alarm Voltage:* Typical value for information. Below this voltage, a battery alarm signal is generated.
 - *Power consumption:* Typical value for information. Supply currents in various operating modes.



DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1µV, full range = -100...+300 mV
Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X | Y | Z |
|---------------------|----------------------|----------------------|----------------------|
| High Range | 404.432 ± 0.1% (k=2) | 403.884 ± 0.1% (k=2) | 404.331 ± 0.1% (k=2) |
| Low Range | 3.94218 ± 0.7% (k=2) | 3.94771 ± 0.7% (k=2) | 3.94526 ± 0.7% (k=2) |

Connector Angle

| | |
|-------------------------------------------|-------------|
| Connector Angle to be used in DASY system | 268 ° ± 1 ° |
|-------------------------------------------|-------------|

Appendix
1. DC Voltage Linearity

| High Range | Input (μV) | Reading (μV) | Error (%) |
|-------------------|-------------------------|---------------------------|-----------|
| Channel X + Input | 200000 | 199999.3 | 0.00 |
| Channel X + Input | 20000 | 20005.75 | 0.03 |
| Channel X - Input | 20000 | -19997.67 | -0.01 |
| Channel Y + Input | 200000 | 199999.5 | 0.00 |
| Channel Y + Input | 20000 | 20002.82 | 0.01 |
| Channel Y - Input | 20000 | -20004.40 | 0.02 |
| Channel Z + Input | 200000 | 199999.6 | 0.00 |
| Channel Z + Input | 20000 | 20005.54 | 0.03 |
| Channel Z - Input | 20000 | -20001.11 | 0.01 |

| Low Range | Input (μV) | Reading (μV) | Error (%) |
|-------------------|-------------------------|---------------------------|-----------|
| Channel X + Input | 2000 | 2000.1 | 0.00 |
| Channel X + Input | 200 | 199.12 | -0.44 |
| Channel X - Input | 200 | -200.64 | 0.32 |
| Channel Y + Input | 2000 | 2000 | 0.00 |
| Channel Y + Input | 200 | 199.96 | -0.02 |
| Channel Y - Input | 200 | -201.00 | 0.50 |
| Channel Z + Input | 2000 | 1999.9 | 0.00 |
| Channel Z + Input | 200 | 199.05 | -0.47 |
| Channel Z - Input | 200 | -201.08 | 0.54 |

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | Common mode Input Voltage (mV) | High Range Average Reading (μV) | Low Range Average Reading (μV) |
|-----------|--------------------------------|----------------------------------------------|---------------------------------------------|
| Channel X | 200 | 13.88 | 12.97 |
| | -200 | -12.40 | -14.29 |
| Channel Y | 200 | -6.32 | -6.22 |
| | -200 | 5.34 | 5.31 |
| Channel Z | 200 | 1.08 | 0.59 |
| | -200 | -1.42 | -1.66 |

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | Input Voltage (mV) | Channel X (μV) | Channel Y (μV) | Channel Z (μV) |
|-----------|--------------------|-----------------------------|-----------------------------|-----------------------------|
| Channel X | 200 | - | 1.14 | 0.16 |
| Channel Y | 200 | 1.52 | - | 3.87 |
| Channel Z | 200 | 0.23 | 0.75 | - |

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | High Range (LSB) | Low Range (LSB) |
|-----------|------------------|-----------------|
| Channel X | 15969 | 16269 |
| Channel Y | 15848 | 16148 |
| Channel Z | 16203 | 16661 |

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10MΩ

| | Average (μV) | min. Offset (μV) | max. Offset (μV) | Std. Deviation (μV) |
|-----------|--------------|------------------|------------------|---------------------|
| Channel X | 0.12 | -1.70 | 1.72 | 0.50 |
| Channel Y | -2.46 | -3.42 | -1.39 | 0.44 |
| Channel Z | -0.78 | -2.16 | 0.00 | 0.29 |

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance

| | Zeroing (MOhm) | Measuring (MOhm) |
|-----------|----------------|------------------|
| Channel X | 0.2000 | 199.3 |
| Channel Y | 0.2001 | 199.9 |
| Channel Z | 0.1999 | 199.4 |

8. Low Battery Alarm Voltage (verified during pre test)

| Typical values | Alarm Level (VDC) |
|----------------|-------------------|
| Supply (+ Vcc) | +7.9 |
| Supply (- Vcc) | -7.6 |

9. Power Consumption (verified during pre test)

| Typical values | Switched off (mA) | Stand by (mA) | Transmitting (mA) |
|----------------|-------------------|---------------|-------------------|
| Supply (+ Vcc) | +0.0 | +6 | +14 |
| Supply (- Vcc) | -0.01 | -8 | -9 |

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland




S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **ATL (Alden)**

Certificate No: **DAE3-393_Aug08**

| CALIBRATION CERTIFICATE | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------------------------|----------------------------------------------------------------------------------------------------|-------------------|------|----------------------------|-----------------------|-----------------------------------|-------------|----------------------|--------|-------------------------------|-------------|----------------------|--------|---------------------|------|-----------------------|-----------------|---------------------|--------------------|----------------------------|------------------------|
| Object | DAE3 - SD-000.D03.AA - SN: 393 | | | | | | | | | | | | | | | | | | | | | | |
| Calibration procedure(s) | QA-CAL-06 v12 Calibration procedure for the data acquisition electronics (DAE) | | | | | | | | | | | | | | | | | | | | | | |
| Calibration date: | August 25, 2008 | | | | | | | | | | | | | | | | | | | | | | |
| Condition of the calibrated item | In Tolerance | | | | | | | | | | | | | | | | | | | | | | |
| <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Fluke Process Calibrator Type 702</td> <td>SN: 6295903</td> <td>04-Oct-07 (No: 6467)</td> <td>Oct-08</td> </tr> <tr> <td>Keithley Multimeter Type 2001</td> <td>SN: 0810278</td> <td>03-Oct-07 (No: 6465)</td> <td>Oct-08</td> </tr> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> <tr> <td>Calibrator Box V1.1</td> <td>SE UMS 006 AB 1004</td> <td>06-Jun-08 (in house check)</td> <td>In house check: Jun-09</td> </tr> </tbody> </table> | | | | Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration | Fluke Process Calibrator Type 702 | SN: 6295903 | 04-Oct-07 (No: 6467) | Oct-08 | Keithley Multimeter Type 2001 | SN: 0810278 | 03-Oct-07 (No: 6465) | Oct-08 | Secondary Standards | ID # | Check Date (in house) | Scheduled Check | Calibrator Box V1.1 | SE UMS 006 AB 1004 | 06-Jun-08 (in house check) | In house check: Jun-09 |
| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration | | | | | | | | | | | | | | | | | | | | |
| Fluke Process Calibrator Type 702 | SN: 6295903 | 04-Oct-07 (No: 6467) | Oct-08 | | | | | | | | | | | | | | | | | | | | |
| Keithley Multimeter Type 2001 | SN: 0810278 | 03-Oct-07 (No: 6465) | Oct-08 | | | | | | | | | | | | | | | | | | | | |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check | | | | | | | | | | | | | | | | | | | | |
| Calibrator Box V1.1 | SE UMS 006 AB 1004 | 06-Jun-08 (in house check) | In house check: Jun-09 | | | | | | | | | | | | | | | | | | | | |
| Calibrated by: | Name Dominique Stoffen | Function Technician | Signature  | | | | | | | | | | | | | | | | | | | | |
| Approved by: | Name Fin Bannhof | Function R&D Director | Signature  | | | | | | | | | | | | | | | | | | | | |
| | | | Issued: August 25, 2008 | | | | | | | | | | | | | | | | | | | | |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. | | | | | | | | | | | | | | | | | | | | | | | |

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
 - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
 - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
 - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
 - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - **Input resistance:** DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
 - **Power consumption:** Typical value for information. Supply currents in various operating modes.



DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1µV, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X | Y | Z |
|---------------------|----------------------|----------------------|----------------------|
| High Range | 403.922 ± 0.1% (k=2) | 404.197 ± 0.1% (k=2) | 404.112 ± 0.1% (k=2) |
| Low Range | 3.99613 ± 0.7% (k=2) | 3.96056 ± 0.7% (k=2) | 3.96224 ± 0.7% (k=2) |

Connector Angle

| | |
|-------------------------------------------|-------------|
| Connector Angle to be used in DASY system | 305 ° ± 1 ° |
|-------------------------------------------|-------------|

Appendix

1. DC Voltage Linearity

| High Range | Input (μV) | Reading (μV) | Error (%) |
|-------------------|-------------------------|---------------------------|-----------|
| Channel X + Input | 200000 | 200000.5 | 0.00 |
| Channel X + Input | 20000 | 20006.70 | 0.03 |
| Channel X - Input | 20000 | -19995.73 | -0.02 |
| Channel Y + Input | 200000 | 200000.1 | 0.00 |
| Channel Y + Input | 20000 | 20003.14 | 0.02 |
| Channel Y - Input | 20000 | -19996.72 | -0.02 |
| Channel Z + Input | 200000 | 200000.1 | 0.00 |
| Channel Z + Input | 20000 | 20000.43 | 0.00 |
| Channel Z - Input | 20000 | -20009.12 | 0.05 |

| Low Range | Input (μV) | Reading (μV) | Error (%) |
|-------------------|-------------------------|---------------------------|-----------|
| Channel X + Input | 2000 | 2000 | 0.00 |
| Channel X + Input | 200 | 199.94 | -0.03 |
| Channel X - Input | 200 | -199.74 | -0.13 |
| Channel Y + Input | 2000 | 2000 | 0.00 |
| Channel Y + Input | 200 | 199.41 | -0.30 |
| Channel Y - Input | 200 | -200.68 | 0.34 |
| Channel Z + Input | 2000 | 1999.9 | 0.00 |
| Channel Z + Input | 200 | 199.05 | -0.47 |
| Channel Z - Input | 200 | -201.02 | 0.51 |

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | Common mode Input Voltage (mV) | High Range Average Reading (μV) | Low Range Average Reading (μV) |
|-----------|--------------------------------|----------------------------------------------|---------------------------------------------|
| Channel X | 200 | 12.56 | 11.64 |
| | -200 | -10.20 | -11.30 |
| Channel Y | 200 | 9.63 | 9.29 |
| | -200 | -10.67 | -11.06 |
| Channel Z | 200 | 4.03 | 3.82 |
| | -200 | -5.44 | -5.95 |

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | Input Voltage (mV) | Channel X (μV) | Channel Y (μV) | Channel Z (μV) |
|-----------|--------------------|-----------------------------|-----------------------------|-----------------------------|
| Channel X | 200 | - | 3.90 | 1.05 |
| Channel Y | 200 | 1.67 | - | 5.27 |
| Channel Z | 200 | -0.69 | 1.48 | - |



4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | High Range (LSB) | Low Range (LSB) |
|-----------|------------------|-----------------|
| Channel X | 16160 | 16805 |
| Channel Y | 16023 | 16373 |
| Channel Z | 16458 | 17457 |

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M Ω

| | Average (μ V) | min. Offset (μ V) | max. Offset (μ V) | Std. Deviation (μ V) |
|-----------|--------------------|------------------------|------------------------|---------------------------|
| Channel X | 0.40 | -0.62 | 1.30 | 0.25 |
| Channel Y | -0.40 | -0.88 | 0.29 | 0.22 |
| Channel Z | -0.18 | -1.74 | 2.11 | 0.48 |

6. Input Offset Current

Nominal input circuitry offset current on all channels: <25fA

7. Input Resistance

| | Zeroing (MOhm) | Measuring (MOhm) |
|-----------|----------------|------------------|
| Channel X | 0.2000 | 198.3 |
| Channel Y | 0.2000 | 198.2 |
| Channel Z | 0.2000 | 198.1 |

8. Low Battery Alarm Voltage (verified during pre test)

| Typical values | Alarm Level (VDC) |
|----------------|-------------------|
| Supply (+ Vcc) | +7.9 |
| Supply (- Vcc) | -7.6 |

9. Power Consumption (verified during pre test)

| Typical values | Switched off (mA) | Stand by (mA) | Transmitting (mA) |
|----------------|-------------------|---------------|-------------------|
| Supply (+ Vcc) | +0.0 | +8 | +14 |
| Supply (- Vcc) | -0.01 | -8 | -9 |



Calibration Laboratory of Schmid & Partner Engineering AG



S Schweizerischer Kalibrierdienst
C Service suisse d'etalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Sporton (Auden)

Certificate No: ET3-1787_Aug08

CALIBRATION CERTIFICATE

Object: ET3DV6 - SN:1787
Calibration procedure(s): QA CAL-01.v6 and QA CAL-23.v3
Calibration procedure for dosimetric E-field probes
Calibration date: August 26, 2008
Condition of the calibrated item: In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI)
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate

All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%

Calibration Equipment used (M&TE critical for calibration)

Table with 4 columns: Primary Standards, ID #, Cal Date (Certificate No.), Scheduled Calibration. Lists equipment like Power meter E4419B, Power sensor E4412A, Reference 3 dB Attenuator, etc.

Table with 4 columns: Secondary Standards, ID #, Check Date (in house), Scheduled Check. Lists RF generator HP 8648C, Network Analyzer HP 8753E.

Calibrated by: Katja Polkovic, Technical Manager
Approved by: Niels Kuster, Quality Manager

Handwritten signatures of Katja Polkovic and Niels Kuster.

Issued: August 26, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

| | |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.



ET3DV6 SN:1787

August 26, 2008

Probe ET3DV6

SN:1787

| | |
|------------------|-----------------|
| Manufactured: | May 28, 2003 |
| Last calibrated: | August 28, 2007 |
| Recalibrated: | August 26, 2008 |

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)



ET3DV6 SN:1787

August 26, 2008

DASY - Parameters of Probe: ET3DV6 SN:1787

Sensitivity in Free Space^A

Diode Compression^B

| | | | | |
|-------|--------------|-----------------------|-------|-------|
| NormX | 1.63 ± 10.1% | μV/(V/m) ² | DCP X | 90 mV |
| NormY | 1.67 ± 10.1% | μV/(V/m) ² | DCP Y | 93 mV |
| NormZ | 2.18 ± 10.1% | μV/(V/m) ² | DCP Z | 92 mV |

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 900 MHz Typical SAR gradient: 5 % per mm

| | | | |
|-------------------------------------------|------------------------------|--------|--------|
| Sensor Center to Phantom Surface Distance | | 3.7 mm | 4.7 mm |
| SAR _{be} [%] | Without Correction Algorithm | 11.3 | 7.5 |
| SAR _{be} [%] | With Correction Algorithm | 0.8 | 0.5 |

TSL 1750 MHz Typical SAR gradient: 10 % per mm

| | | | |
|-------------------------------------------|------------------------------|--------|--------|
| Sensor Center to Phantom Surface Distance | | 3.7 mm | 4.7 mm |
| SAR _{be} [%] | Without Correction Algorithm | 10.1 | 6.5 |
| SAR _{be} [%] | With Correction Algorithm | 0.8 | 0.6 |

Sensor Offset

Probe Tip to Sensor Center 2.7 mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).
^B Numerical linearization parameter: uncertainty not required.




ET3DV6 SN:1787

August 26, 2008

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

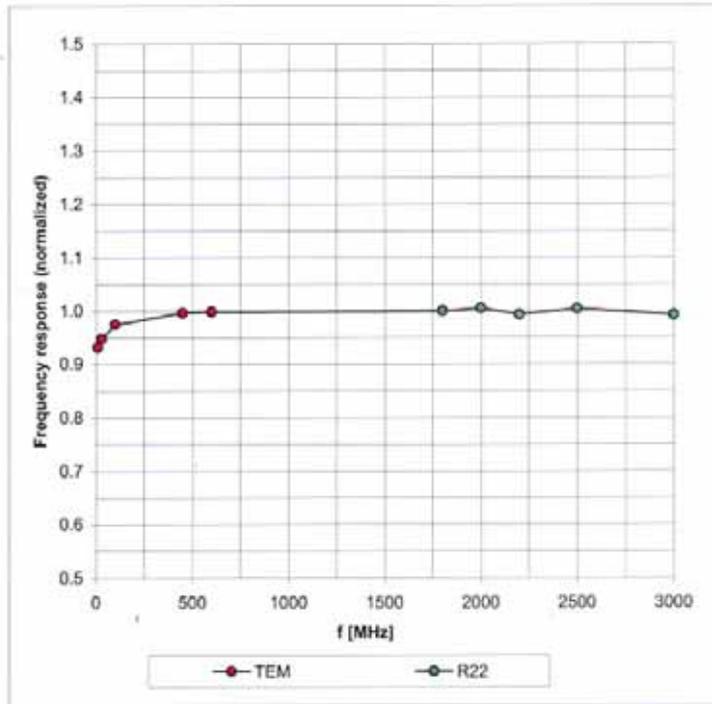



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)



ET3DV6 SN:1787

August 26, 2008

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

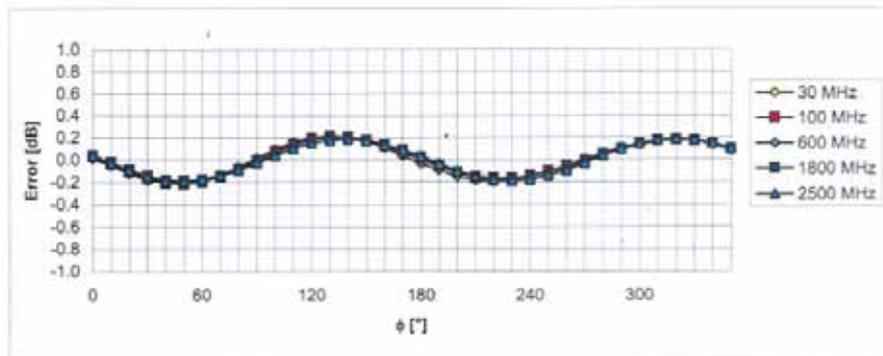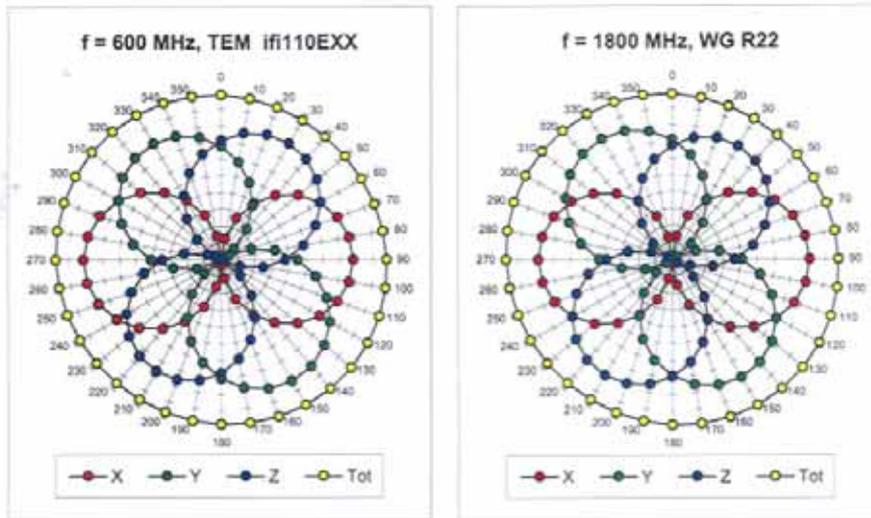



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)



ET3DV6 SN:1787

August 26, 2008

Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800$ MHz)

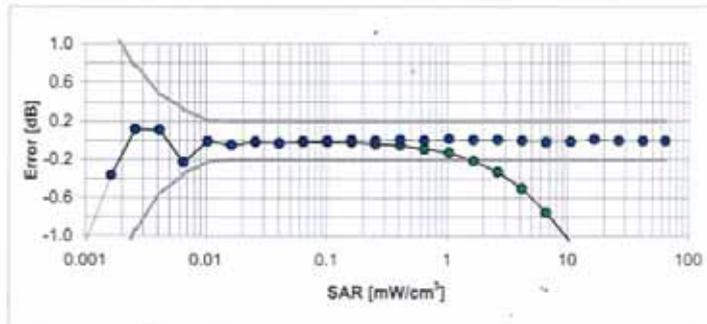
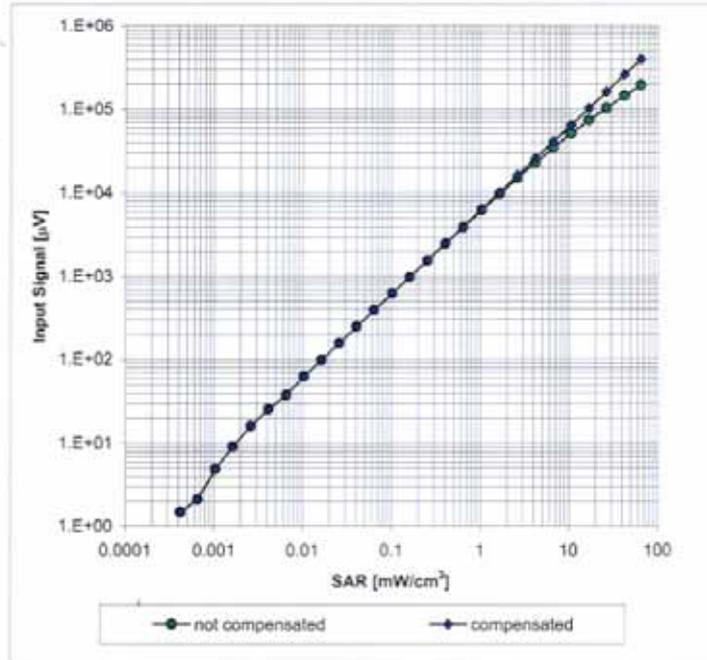


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

ET3DV6 SN:1787

August 26, 2008

Conversion Factor Assessment

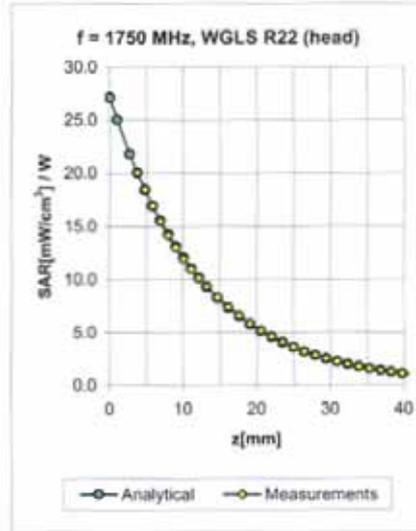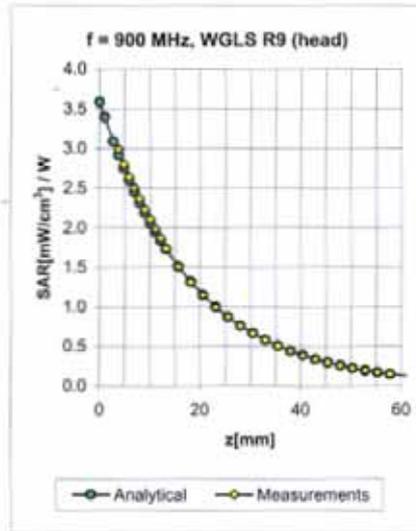

| f [MHz] | Validity [MHz] ^c | TSL | Permittivity | Conductivity | Alpha | Depth | ConvF Uncertainty |
|---------|-----------------------------|------|--------------|--------------|-------|-------|--------------------|
| 900 | ± 50 / ± 100 | Head | 41.5 ± 5% | 0.97 ± 5% | 0.30 | 2.80 | 6.06 ± 11.0% (k=2) |
| 1750 | ± 50 / ± 100 | Head | 40.1 ± 5% | 1.37 ± 5% | 0.53 | 2.11 | 5.36 ± 11.0% (k=2) |
| 1950 | ± 50 / ± 100 | Head | 40.0 ± 5% | 1.40 ± 5% | 0.59 | 1.96 | 5.01 ± 11.0% (k=2) |
| 2450 | ± 50 / ± 100 | Head | 39.2 ± 5% | 1.80 ± 5% | 0.77 | 1.57 | 4.49 ± 11.0% (k=2) |
| 900 | ± 50 / ± 100 | Body | 55.0 ± 5% | 1.05 ± 5% | 0.31 | 2.98 | 5.91 ± 11.0% (k=2) |
| 1750 | ± 50 / ± 100 | Body | 53.4 ± 5% | 1.49 ± 5% | 0.60 | 2.20 | 4.73 ± 11.0% (k=2) |
| 1950 | ± 50 / ± 100 | Body | 53.3 ± 5% | 1.52 ± 5% | 0.68 | 1.95 | 4.49 ± 11.0% (k=2) |
| 2450 | ± 50 / ± 100 | Body | 52.7 ± 5% | 1.95 ± 5% | 0.90 | 1.51 | 3.79 ± 11.0% (k=2) |

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.




ET3DV6 SN:1787

August 26, 2008

Deviation from Isotropy in HSL

Error (ϕ , θ), $f = 900$ MHz

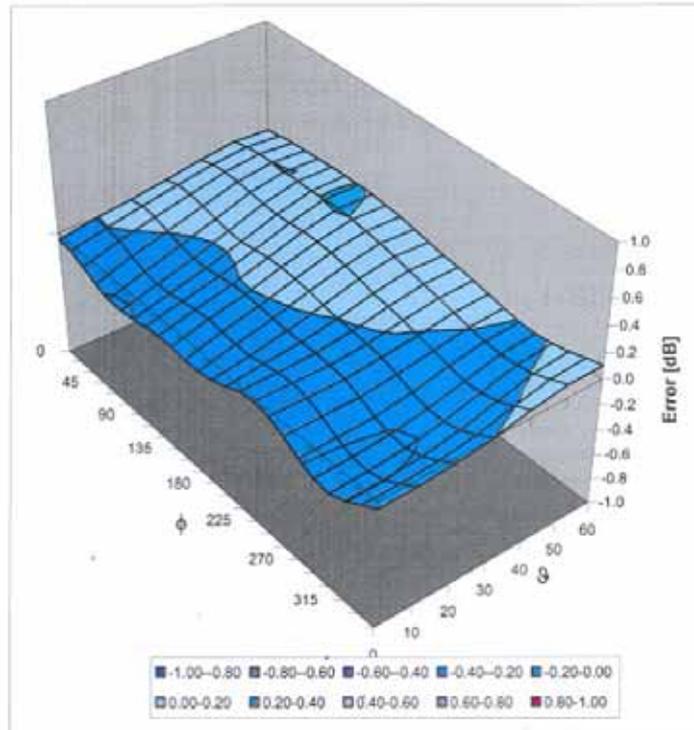

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)