



TEST REPORT

No. 2011TAR530

for

ZTE Corporation

CDMA1x Digital Mobile Phone

Model Name: ZTE-C F451

FCC ID : Q78-ZTECF451

IC ID: 5200A-ZTECF451

with

Hardware Version: 1.1

Software Version: PMI_CA_F451V1.0.0B03

Issued Date: 2011-10-12

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAR accreditation (DIN EN ISO/IEC 17025): No. DGA-PL-114/01-02

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629A-1

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633 , Fax:+86(0)10-62304633 Email:welcome@emcite.com. www.emcite.com

CONTENTS

1. TEST LABORATORY	3
1.1. TESTING LOCATION	3
1.2. TESTING ENVIRONMENT	3
1.3. PROJECT DATA	3
1.4. SIGNATURE.....	3
2. CLIENT INFORMATION	4
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT.....	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
4. REFERENCE DOCUMENTS.....	6
4.1. REFERENCE DOCUMENTS FOR TESTING.....	6
5. LABORATORY ENVIRONMENT.....	7
6. SUMMARY OF TEST RESULTS.....	8
7. TEST EQUIPMENTS UTILIZED.....	9
ANNEX A: MEASUREMENT RESULTS	10

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No 52, Huayuan beilu, Haidian District, Beijing, P. R. China
Postal Code: 100191
Telephone: 00861062304633
Fax: 00861062304633


1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%

1.3. Project data


Testing Start Date: Sep 26, 2011
Testing End Date: Sep 27, 2011

1.4. Signature




Liu Baodian

(Prepared this test report)



Sun Xiangqian

(Reviewed this test report)



Lu Bingsong

Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: ZTE Corporation
Address /Post: #68 Zijin Hua Road, Nanjing, Jiangsu Province, P. R. China
City: Nan Jing
Postal Code: 210012
Country: China
Telephone: +86-25-52878232
Fax: +86-25-68897541

2.2. Manufacturer Information

Company Name: ZTE Corporation
Address /Post: #68 Zijin Hua Road, Nanjing, Jiangsu Province, P. R. China
City: Nan Jing
Postal Code: 210012
Country: China
Telephone: +86-25-52878232
Fax: +86-25-68897541

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	CDMA1x Digital Mobile Handset
Model Name	ZTE-C F451
FCC ID	Q78-ZTECF451
IC ID	5200A-ZTECF451
Frequency	CDMA800/1900MHz and G-band
Antenna	Internal

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MII of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	A1000020C2B9AB	1.1	PMI_CA_F451V1.0.0B03

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Travel Adapter	/
AE2	USB Cable	/
AE3	Battery	/
AE1		
Model	STC-A22O50I700USBA-Z	
Manufacturer	DOKOCOM	
Length of DC line	/	
AE2		
Model	USB-MU5-B-120-VZW-A	
Manufacturer	/	
Length of DC line	120cm	
AE3		
Model	Li3710T42P3h483757	
Manufacturer	ZTE	
Capacitance	1000mAh	
Nominal Voltage	3.7V	

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	July 10, 2008 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003
ICES-003	Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard Digital Apparatus	Issue 4, Feb. 2004

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω

Conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1(6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Fully-anechoic chamber2(8.6 meters×6.1 meters×3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 1Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:	
P	Pass
NA	Not applicable
F	Fail

Clause	List	Clause in FCC rules	Clause in IC rules	Verdict
1	Radiated Emission	15.109(a)	Section6 Section 7.1	P
2	Conducted Emission	15.107(a)	Section6 Section 7.1	P

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	Test Receiver	ESCI	100344	R&S	2012-03-12
2	Test Receiver	ESCI	100766	R&S	2011-12-06
3	Test Receiver	ESI40	831564/002	R&S	2012-02-12
4	BiLog Antenna	VUL9163	9163-302	Schwarzbeck	2012-02-10
5	Signal Generator	SMB100A	102063	R&S	2012-03-05
6	LISN	ESH2-Z5	829991/012	R&S	2012-04-20
7	Universal Radio Communication Tester	CMU200	100680	R&S	2011-09-05
8	Dual-Ridge Waveguide Horn Antenna	3115	6914	EMCO	2012-01-18
9	PC	OPTIPLEX 755	3908243625	DELL	N/A
10	Monitor	E178FPc	CN-OWR979-64 180-7AJ-D2MS	DELL	N/A
11	Printer	DeskJet D2368	TH72E12G7Q	HP	N/A
12	Keyboard	L100	CN0RH6596589 07ATOI40	DELL	N/A
13	Mouse	VR-301	6927225500198	XINGYU	N/A
14	Rod Antenna	HFH2-Z6	100043	R&S	2012-09-05

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission (§15.109(a))

Reference

FCC: CFR Part 15.109(a)

IC: ICES-003 Section 5.5.

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 8.3.

A.1.2 EUT Operating Mode:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.1.3 Measurement Limit

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

A.1.4 Test Condition

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + F_A + G_{\text{PL}}$$

Where

F_A : Receive Antenna Factor

G_{PL} : Cable Loss

P_{Mea} : The measurement result on receiver.

Charging Mode

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	F_A (dB/m)	P_{Mea} (dBuV)	Polarity
3701.403	38.49	-19.4	33.4	24.49	VERTICAL
3703.407	38.47	-19.4	33.4	24.47	VERTICAL
3699.399	38.44	-19.5	33.4	24.54	HORIZONTAL
3705.411	38.41	-19.4	33.4	24.41	VERTICAL
3697.395	38.39	-19.5	33.4	24.49	VERTICAL
3707.415	38.39	-19.4	33.4	24.39	HORIZONTAL

USB Mode

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	F_A (dB/m)	P_{mea} (dBuV)	Polarity
3699.399	38.47	-19.5	33.4	24.57	VERTICAL
3701.403	38.46	-19.4	33.4	24.46	VERTICAL
3703.407	38.44	-19.4	33.4	24.44	VERTICAL
3705.411	38.41	-19.4	33.4	24.41	HORIZONTAL
3709.419	38.4	-19.4	33.4	24.4	HORIZONTAL
3697.395	38.39	-19.5	33.4	24.49	VERTICAL

Charging Mode

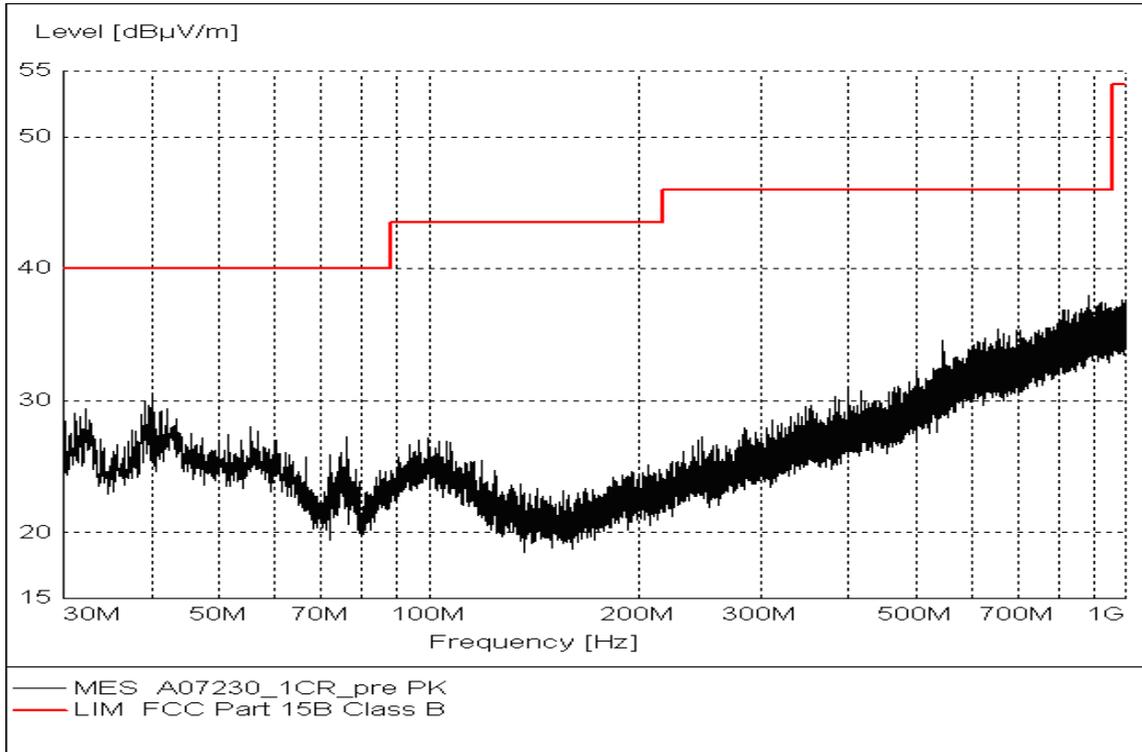


Figure A.1 Radiated Emission from 30MHz to 1GHz

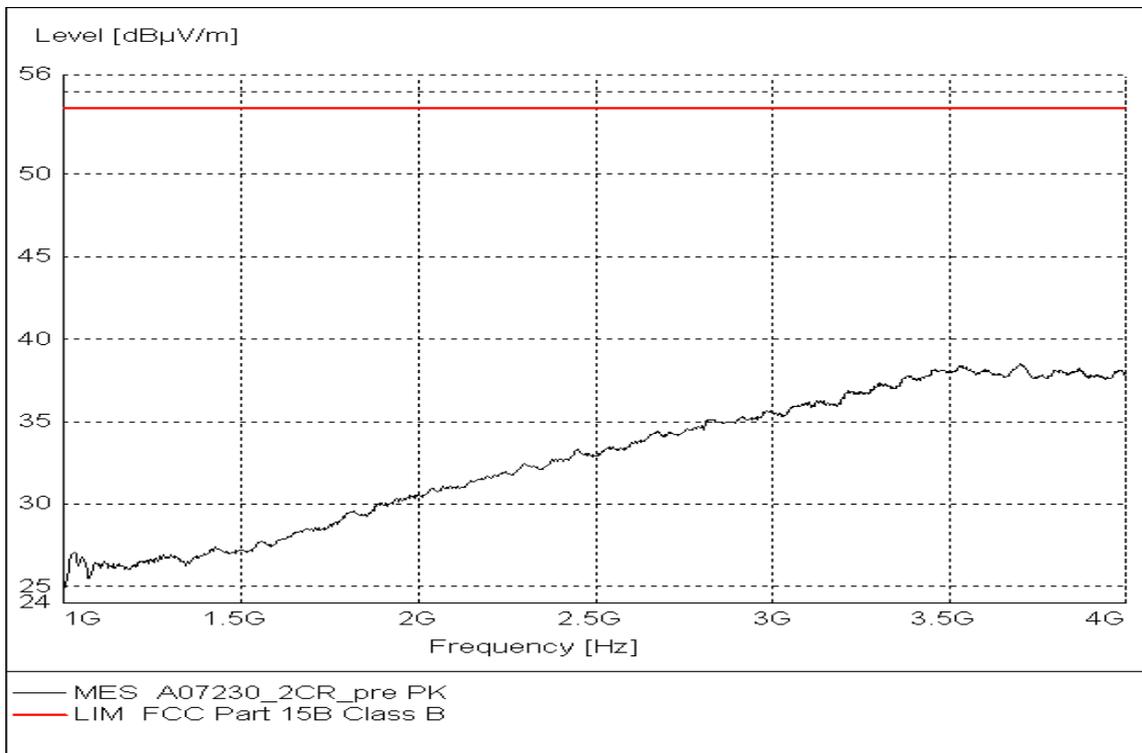


Figure A.2 Radiated Emission from 1GHz to 4GHz

USB Mode

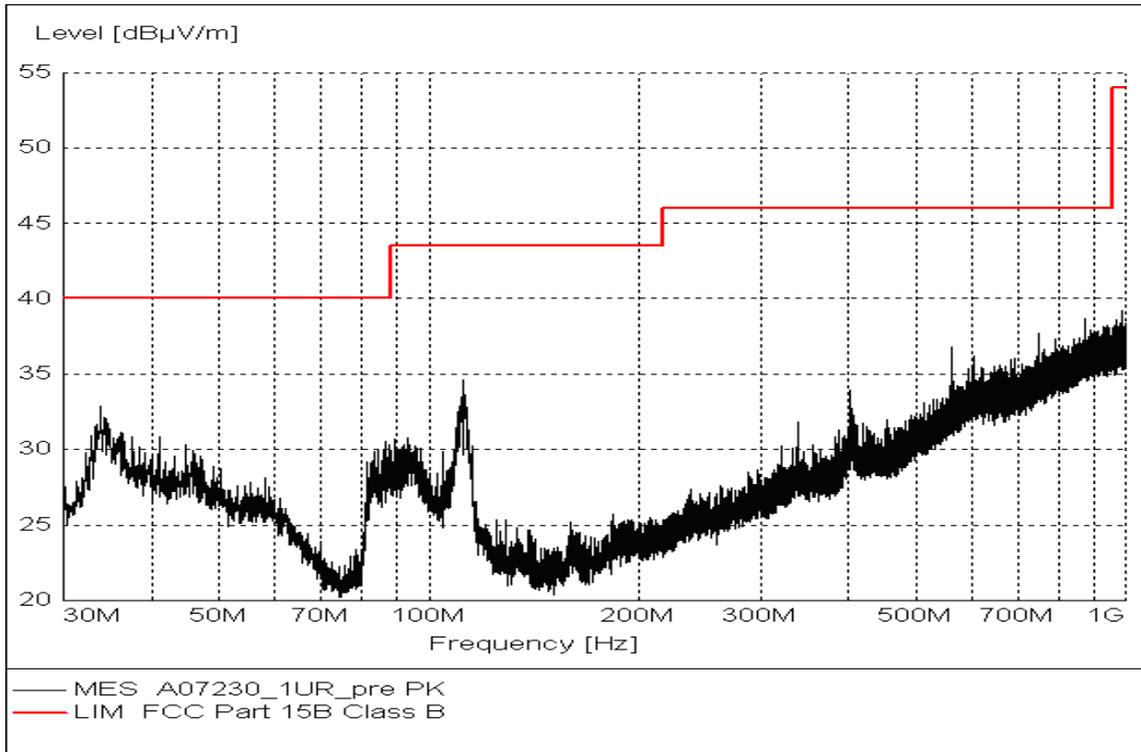


Figure A.3 Radiated Emission from 30MHz to 1GHz

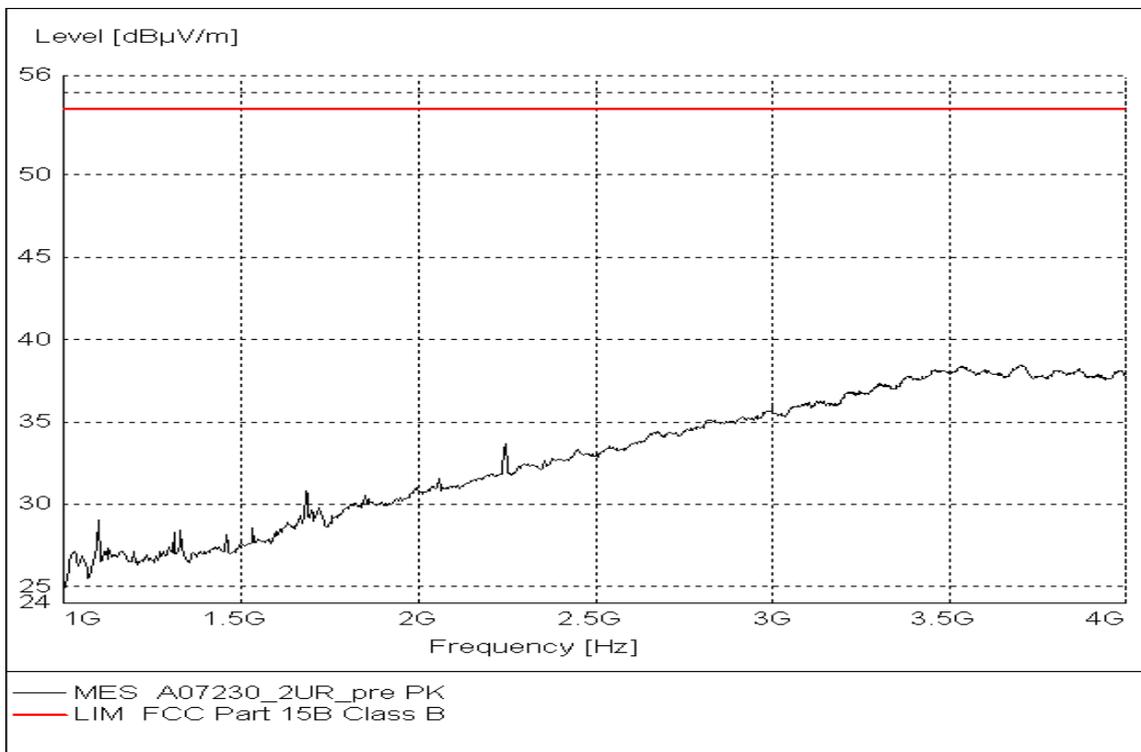


Figure A.4 Radiated Emission from 1GHz to 4GHz

A.2 Conducted Emission (§15.107(a))

Reference

FCC: CFR Part 15.107(a)

IC: ICES-003 Section 5.3.

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 7.2.

A.2.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW	Sweep Time(s)
9kHz	1

A.2.4 Measurement Results Charging Mode

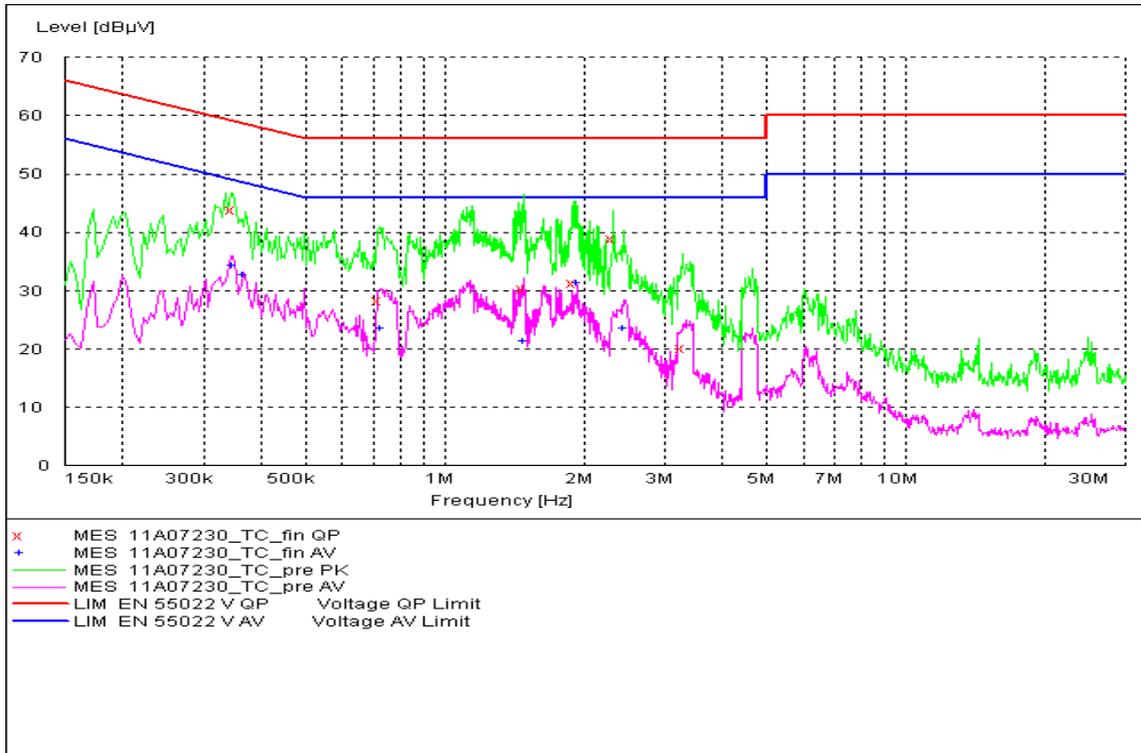


Figure A.5 Conducted Emission

MEASUREMENT RESULT: "11A07230_TC_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.348000	43.80	10.1	59	15.3	L1	GND
0.721500	28.40	10.1	56	27.6	N	GND
1.486500	30.30	10.1	56	25.7	N	GND
1.914000	31.20	10.1	56	24.8	N	GND
2.322800	38.90	10.1	56	17.1	L1	GND
3.276952	20.20	10.1	56	35.8	L1	GND

MEASUREMENT RESULT: "11A07230_TC_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.348000	34.30	10.1	49	14.7	N	GND
0.366000	32.60	10.1	49	16.0	N	GND
0.726000	23.50	10.1	46	22.5	N	GND
1.486500	21.40	10.1	46	24.6	N	GND
1.941000	31.40	10.1	46	14.6	L1	GND
2.441588	23.60	10.1	46	22.4	L1	GND

USB Mode

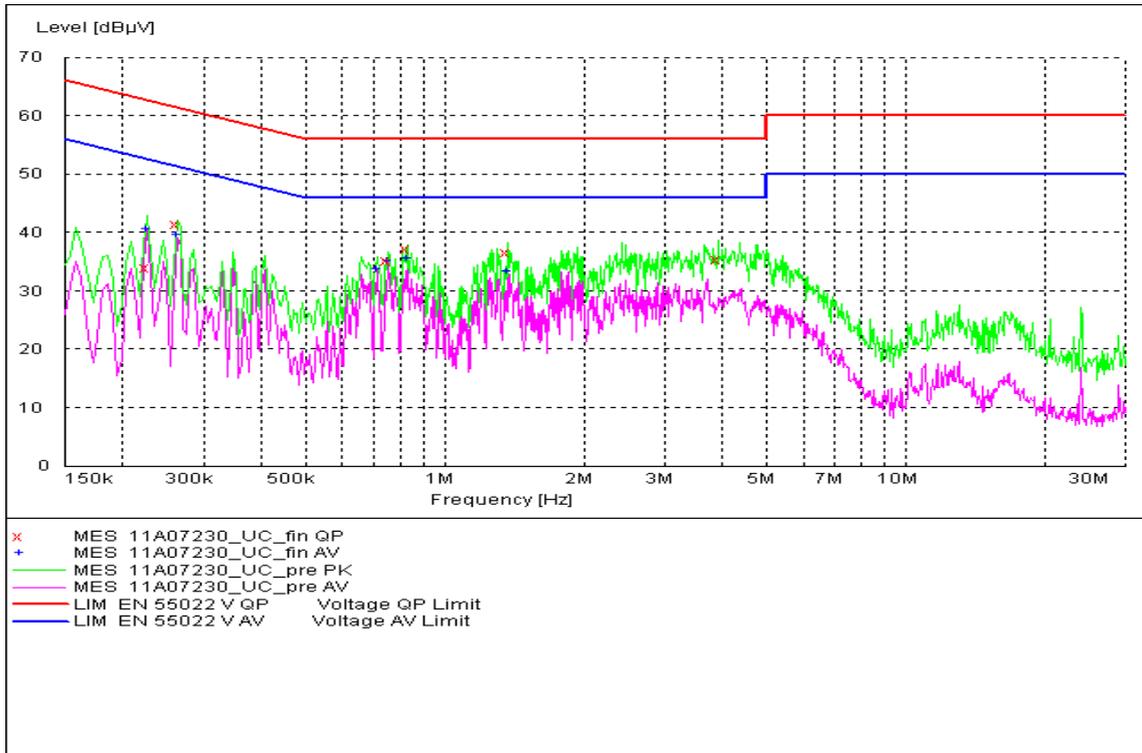


Figure A.6 Conducted Emission

MEASUREMENT RESULT: "11A07230_UC_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.226500	33.90	10.1	63	28.7	L1	GND
0.262500	41.40	10.1	61	20.0	N	GND
0.753000	35.10	10.1	56	20.9	L1	GND
0.829500	37.10	10.1	56	18.9	N	GND
1.374000	36.70	10.1	56	19.3	N	GND
3.921465	35.30	10.1	56	20.7	L1	GND

MEASUREMENT RESULT: "11A07230_UC_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.226500	40.60	10.1	53	12.0	N	GND
0.262500	39.60	10.1	51	11.7	N	GND
0.717000	33.80	10.1	46	12.2	N	GND
0.753000	35.10	10.1	46	10.9	N	GND
0.829500	35.50	10.1	46	10.5	N	GND
1.374000	33.30	10.1	46	12.7	N	GND

END OF REPORT