

---

## CONFORMANCE TEST REPORT FOR HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

---

Report No. : SRTC2010-H024-E0024

Product Name: CDMA 1X Digital Mobile Phone

Product Model: ZTE-C S160

Applicant: ZTE Corporation

Manufacture: ZTE Corporation

Specification: FCC OET Bulletin 65 (Edition 97-01)

Supplement C (Edition 01-01)

FCC ID: Q78-ZTECS160

The State Radio\_monitoring\_center Testing Center (SRTC)

No.80 Beilishi Road Xicheng District Beijing, China

Tel: 86-10-68009202 Fax: 86-10-68009205

## Executive Summary



The ZTE-C S160 is a CDMA 1X Digital Mobile Phone Operating in the 835MHz frequency range. The device has an internal integrated antenna .The system concepts used are the IS2000 standards.

The objective of the measurements done by SRTC (The State Radio\_monitoring\_center Testing Center) was the dosimetric assessment of one device in the IS2000 standards. The examinations have been carried out with the dosimetric assessment system, "DASY4".

The measurements were made according to FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01) Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields .All measurements have been performed in accordance to the recommendations given by SPEAG.

**The maximum SAR of the ZTE-C S160 mobile phone is**

| Mode                                  | CH/f(MHz)     | Power    | Limit<br>(mW/g)/1<br>g | Measured<br>(mW/g) | Result |
|---------------------------------------|---------------|----------|------------------------|--------------------|--------|
| SO55 RC3 full rate<br>Lefthand, Cheek | 384/836.52MHz | 23.91dBm | 1.6                    | 1.31               | PASS   |

|                                                                                                                                                                     |                                                                                                                                                            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| This Test Report Is Issued by:<br>Mr. Song Qizhu<br>Director of the test lab<br> | Checked by:<br>Mr. Wang Junfeng<br>Deputy director of the test lab<br> |
| Tested by:<br>Ms. Liu Jia<br>Test engineer<br>                                   | Issued date:<br><br><b>2010.11.03</b>                                                                                                                      |

## Tables of Contents

|                                                                                        |    |
|----------------------------------------------------------------------------------------|----|
| 1. General information .....                                                           | 3  |
| 1.1 Notes of the test report .....                                                     | 3  |
| 1.2 Information about the testing laboratory .....                                     | 3  |
| 1.3 Applicant's details .....                                                          | 3  |
| 1.4 Manufacturer's details .....                                                       | 3  |
| 1.5 Application details .....                                                          | 4  |
| 1.6 Information of Test Sample .....                                                   | 4  |
| 1.7 Auxiliary Equipment (AE) .....                                                     | 4  |
| 1.8 Reference Specification .....                                                      | 5  |
| 2. Subject of Investigation .....                                                      | 6  |
| 2.1 The IEEE Standard C95.1 and the FCC Exposure Criteria .....                        | 7  |
| 2.2 Distinction Between Exposed Population, Duration of Exposure and Frequencies ..... | 7  |
| 2.3 Distinction between Maximum Permissible Exposure and SAR Limits .....              | 7  |
| 2.4 SAR Limit .....                                                                    | 8  |
| 3 The FCC Measurement Procedure .....                                                  | 8  |
| 3.1 General Requirements .....                                                         | 9  |
| 3.2 Phantom specifications (shell and liquid) .....                                    | 9  |
| 3.3 Specifications of the SAR measurement equipment .....                              | 10 |
| 3.4 Scanning system specifications .....                                               | 10 |
| 3.5 Mobile phone holder specifications .....                                           | 10 |
| 4. Measurement preparation .....                                                       | 11 |
| 4.1 General preparation .....                                                          | 11 |
| 4.2 Simplified performance checking .....                                              | 11 |
| 4.3 Preparation of the mobile phone under test .....                                   | 11 |
| 4.4 Position of the mobile phone in relation to the phantom .....                      | 11 |
| 4.5 Tests to be performed .....                                                        | 13 |
| 5. The Measurement system .....                                                        | 14 |
| 5.1 DASY4 Information .....                                                            | 14 |
| 5.2 Test Equipments: .....                                                             | 16 |
| 5.3 Isotropic E-field Probe Type ES3DV3 .....                                          | 16 |
| 5.4 Uncertainty Assessment .....                                                       | 17 |
| 6. Test Results .....                                                                  | 18 |
| 6.1 Test Environment: .....                                                            | 18 |
| 6.2 Test Method and Procedure .....                                                    | 18 |
| 6.3 Test Configuration .....                                                           | 19 |
| 6.4 Test Results .....                                                                 | 19 |
| 7. Appendix .....                                                                      | 21 |
| 7.1 Administrative Data .....                                                          | 21 |

---

|                                                           |    |
|-----------------------------------------------------------|----|
| 7.2 Device under Test and Test Conditions.....            | 21 |
| 7.3 Tissue Recipes .....                                  | 24 |
| 7.4 Material Parameters.....                              | 25 |
| 7.5 Setup for System Performance Check.....               | 26 |
| 7.6 Test Results .....                                    | 28 |
| 7.7 Pictures of the device under test.....                | 41 |
| 7.8 Test Positions for the Device under test.....         | 41 |
| 7.9 Picture to demonstrate the required liquid depth..... | 42 |
| 7.10 Simplified Performance Checking .....                | 43 |
| 7.11 Certificate of conformity.....                       | 65 |

## 1. General information

### 1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio\_monitoring\_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

### 1.2 Information about the testing laboratory

Company: The State Radio\_monitoring\_center Testing Center (SRTC)  
Address: No.80 Beilishi Road, Xicheng District, Beijing China  
City: Beijing  
Country or Region: China  
Contacted person: Wang Junfeng  
Tel: +86 10 68009181 +86 10 68009202  
Fax: +86 10 68009195 +86 10 68009205  
Email: wangjf@srrc.org.cn / wangjunfeng@srtc.org.cn

### 1.3 Applicant's details

Company: ZTE Corporation  
Address: ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park,  
Nanshan District, 518057  
City: Shenzhen  
Country or Region: P.R.China  
Grantee Code: Q78  
Contacted person: Min Zhang  
Tel: +86-021-68897541  
Fax: +86-021-50801070  
Email: zhang.min13@zte.com.cn

### 1.4 Manufacturer's details

Company: ZTE Corporation  
Address: ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park,  
Nanshan District, 518057  
City: Shenzhen  
Country or Region: P.R.China  
Contacted person: Min Zhang  
Tel: +86-021-68897541  
Fax: +86-021-50801070  
Email: zhang.min13@zte.com.cn

## 1.5 Application details

Date of receipt of application: 2010.10.20

Date of receipt of test samples: 2010.10.20

Date of test: 2010.10.25

## 1.6 Information of Test Sample

|                            |                                |
|----------------------------|--------------------------------|
| Name of EUT                | CDMA 1X Digital Mobile Phone   |
| FCC ID                     | ZTE-C S160                     |
| Serial Number              | 321883010001                   |
| Frequency range            | Tx:824~849MHz<br>Rx:869~894MHz |
| Rated output power         | 24 dBm                         |
| Modulation type            | OQPSK                          |
| Duplex mode                | FDD                            |
| Duplex spacing:            | 45MHz                          |
| Antenna type               | Fixed Internal                 |
| Power Supply               | Battery                        |
| Rated Power Supply Voltage | 3.7V                           |

## 1.7 Auxiliary Equipment (AE)

| AE No. | Name    | Model              | Manufacturer                           | Serial Number |
|--------|---------|--------------------|----------------------------------------|---------------|
| AE 1   | Adapter | STC-A22O50USBA     | Ruide Electronical Industrial Co., Ltd | ---           |
| AE 2   | Battery | Li3710T42P3h553457 | ZTE Corporation                        | ---           |

## 1.8 Reference Specification

**FCC OET Bulletin 65 (Edition 97-01)**, Supplement C (Edition 01-01) Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields .

**IEC 62209-1-2005**: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1:Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)

**ANSI C95.1–1999**: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz

**IEEE 1528–2003**: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

### [DAY4]

Schmid & partner Engineering AG: DAY4 Manual. Nov.2003

## 2. Subject of Investigation

The ZTE-C S160 is a CDMA 1X Digital Mobile Phone (Portable Device), operating in the 835MHz frequency range. The system concepts used are the IS2000 standards.



Fig 1: picture of the device under test

The objective of the measurements done by SRTC was the domestic assessment of one device in the IS2000 standards. The examinations have been carried out with the domestic assessment system “DASY4” described below.

## **2.1 The IEEE Standard C95.1 and the FCC Exposure Criteria**

In the USA the FCC exposure criteria [OET 65] are based on the withdrawn IEEE Standard C95.1-1999 [IEEE C95.1-1999]. This version was replaced by the IEEE Standard C95.1-2005 [IEEE C95.1-2005] in October, 2005.

Both IEEE standards sets limits for human exposure to radio frequency electromagnetic fields in the frequency range 3 kHz to 300 GHz. One of the major differences in the newly revised C95.1-2005 is the change in the basic restrictions for localized exposure, from 1.6 W/kg averaged over 1 g tissue to 2.0 W/kg averaged over 10 g tissue, which is now identical to the ICNIRP guidelines [ICNIRP 1998].

## **2.2 Distinction Between Exposed Population, Duration of Exposure and Frequencies**

The American Standard [IEEE C95.1-1999] distinguishes between controlled and uncontrolled environment. Controlled environments are locations where there is exposure that may be incurred by persons who are aware of the potential for exposure as a concomitant of employment or by other cognizant persons. Uncontrolled environments are locations where there is the exposure of individuals who have no knowledge or control of their exposure. The exposures may occur in living quarters or workplaces. For exposure in controlled environments higher field strengths are admissible. In addition the duration of exposure is considered.

Due to the influence of frequency on important parameters, as the penetration depth of the electromagnetic fields into the human body and the absorption capability of different tissues, the limits in general vary with frequency.

## **2.3 Distinction between Maximum Permissible Exposure and SAR Limits**

The biological relevant parameter describing the effects of electromagnetic fields in the frequency range of interest is the specific absorption rate SAR (dimension: power/mass). It is a measure of the power absorbed per unit mass. The SAR may be spatially averaged over the total mass of an exposed body or its parts. The SAR is calculated from the r.m.s. electric field strength  $E$  inside the human body, the conductivity  $\sigma$  and the mass density  $\rho$  of the biological tissue:

$$SAR = \frac{\sigma E_i^2}{\rho}$$

$$SAR = c_i \left. \frac{dT}{dt} \right|_{t=0}$$

The specific absorption rate describes the initial rate of temperature rise  $dT/dt$  as a function of the specific heat capacity  $c$  of the tissue. A limitation of the specific absorption rate prevents an excessive heating of the human body by electromagnetic energy.

As it is sometimes difficult to determine the SAR directly by measurement (e.g. whole body averaged SAR), the standard specifies more readily measurable maximum permissible exposures in terms of external electric  $E$  and magnetic field strength  $H$  and power density  $S$ , derived from the SAR limits. The limits for  $E$ ,  $H$  and the SAR limits. The limits for  $E$ ,  $H$  and  $S$  have been fixed so that even under worst case conditions, the limits for the specific absorption rate SAR are not exceeded.

For the relevant frequency range the maximum permissible exposure may be exceeded if the exposure can be shown by appropriate techniques to produce SAR values below the corresponding limits.

## 2.4 SAR Limit

In this report the comparison between the American exposure limits and the measured data is made using the spatial peak SAR; the power level of the device under test guarantees that the whole body averaged SAR is not exceeded. Having in mind a worst case consideration, the SAR limit is valid for uncontrolled environment and mobile respectively portable transmitters. According to Table 1 the SAR values have to be averaged over a mass of 1 g (SAR1g) with the shape of a cube.

| Standards       | Status   | SAR limit [w/kg] |
|-----------------|----------|------------------|
| IEEE C95.1-1999 | Replaced | 1.6              |

Table 1: Relevant spatial peak SAR limit averaged over a mass of 1 g.

## 3 The FCC Measurement Procedure

The Federal Communications Commission (FCC) has published a report and

order on the 1st of August 1996 [FCC 96-326], which requires routine dosimetric assessment of mobile telecommunications devices, either by laboratory measurement techniques or by computational modeling, prior to equipment authorization or use. In 2001 the Commission's Office of Engineering and Technology has released Edition 01-01 of Supplement C to OET Bulletin 65. This revised edition, which replaces Edition 97-01, provides additional guidance and information for evaluating compliance of mobile and Portable devices with FCC limits for human exposure to radiofrequency emissions [OET 65].

### 3.1 General Requirements

The test shall be performed using a miniature probe that is automatically positioned to measure the internal E-field distribution in a phantom model representing the human head exposed to the EM fields produced by mobile phones. From the measured E-field values, the SAR distribution and the maximum mass averaged SAR value shall be calculated.

The test shall be performed in a laboratory conforming to the following environmental conditions:

- the ambient temperature shall be in the range of 15 °C to 30°C and the variation shall not exceed 2 °C during the test;
- the mobile phone shall not interact with the local mobile networks;
- care shall be taken to avoid significant influence on SAR measurements by ambient EM sources;
- care shall be taken to avoid significant influence on SAR measurements by any reflection from the environment (such as floor, positioner, etc.).
- Validation of the system shall be done at least once a year according to the protocol defined in annex D of IEC 62209-1-2005 Standard.

### 3.2 Phantom specifications (shell and liquid)

#### ***Phantom requirements***

The physical characteristics of the phantom model (size and shape) shall resemble the head and neck of a user since the shape is a dominant parameter for exposure. The phantom shall be made from material with dielectric properties similar to those of head tissues. To enable field scanning within it, the material shall be liquid contained in a head and neck shaped shell model. The shell model acts as a shaped container and shall be as unobtrusive as possible. The hand shall not be modeled.

The shell of the phantom shall be made of low loss and low permittivity material:  $\tan(\delta) \leq 0,05$  and  $\epsilon \leq 5$ . The thickness of the phantom is defined in the CAD files and the tolerance shall be  $\pm 0,2$  mm in the area defined in the

CAD files (where the phone touches the head).

#### **Reference points on the phantom:**

The probe positioning shall be defined in relation to three well defined points on the phantom. These points R1, R2 and R3 shall be used to calibrate the positioning system. Three other points, M for mouth, LE for left ear and/or RE for right ear (maximum acoustic coupling), shall be defined on the phantom(s) (see Figure 2). These points shall be used to allow reproducible positioning of the mobile phone in relation to the phantom.

### **3.3 Specifications of the SAR measurement equipment**

The measurement equipment shall be calibrated as a complete system. The probe shall be calibrated together with the amplifier, measurement device and data acquisition system.

The measurement equipment shall be calibrated in each tissue equivalent liquid at the appropriate operating frequency and temperature according to the methodology defined in IEC 62209-1-2005 .The minimum detection limit shall be lower than 0,02 W/kg and the maximum detection limit shall be higher than 100 W/kg. The linearity shall be within 0,5 dB over the SAR range from 0,02 to 100 W/kg. The isotropy shall be within 1 dB. Sensitivity, linearity and isotropy shall be determined in the tissue equivalent liquid. The response time shall be specified.

### **3.4 Scanning system specifications**

The scanning system holding the probe shall be able to scan the whole exposed volume of the phantom in order to evaluate the three-dimensional SAR distribution. The mechanical structure of the scanning system shall not interfere with the SAR measurements.

The accuracy of the probe tip positioning over the measurement area shall be less than 0,2 mm. The sampling resolution shall be 1 mm or less.

### **3.5 Mobile phone holder specifications**

The mobile phone holder shall permit the phone to be positioned according to a tolerance of 1° in the tilt angle. It shall be made of low loss and low permittivity material(s):  $\tan(\delta) \leq 0,05$  and  $\epsilon \leq 5$ .

## **4. Measurement preparation**

### **4.1 General preparation**

The dielectric properties of the tissue equivalent materials shall be measured prior to the SAR measurements and at the same temperature with a tolerance of 2° C. The measured values shall comply with the values defined at the specific frequencies in IEC 62209-1-2005 6.1.1. with a tolerance of 5 % for relative permittivity and conductivity.

The phantom shell shall be filled with the tissue equivalent liquid. The depth of the tissue equivalent liquid inside the phantom and at the vertical position of the ear canal shall be at least 15 cm. The liquid shall be carefully stirred before the measurement and it shall be free of air bubbles. The coordinate system of the scanning system shall be aligned to the coordinate system of the phantom with a tolerance of 0, 2 mm.

### **4.2 Simplified performance checking**

The purpose of the simplified performance check is to verify that the system operates within its specifications, check is a simple test of repeatability to make sure that the system works correctly during the compliance test. The check shall be performed in order to detect possible drift over short time periods and other errors in the system,

The simplified performance check shall be carried out according to annex D of IEC 62209-1-2005. The simplified performance check shall be performed prior to compliance tests and the result shall be within  $\pm 10\%$  of the target value. After the system validation check. The simplified performance check shall be performed at a central frequency of each transmitting band of the mobile phone.

### **4.3 Preparation of the mobile phone under test**

The tested mobile phone shall use its internal transmitter. The battery shall be fully charged before each measurement. The output power and frequency (channel) shall be controlled by 8960 (base station simulator). Philips ZTE-C S160 transmit its highest output peak power level allowed by the system. , The BTS antenna shall be placed at least 50 cm from the phone. The signal emitted by the emulator at antenna feed point shall be lower than the output level of the phone by at least 30 dB.

### **4.4 Position of the mobile phone in relation to the phantom**

**The mobile phone shall be tested in the cheek and tilted positions on left and right sides of the phantom.**

**Definition of the cheek position:**

a) Position the device with the vertical centre line of the body of the device and the horizontal line crossing the centre of the ear piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical centre line with the reference plane containing the three ear and mouth reference points (M, RE and LE) and align the centre of the ear piece with the line RE-LE;

b) Translate the mobile phone box towards the phantom with the ear piece aligned with the line LE-RE until the phone touches the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the box until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

**Definition of the tilted position:**

a) Position the device in the Tilt position described above;

b) While maintaining the device in the reference plane described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost. (see Figure 2)

**Definition of the flat position:**

A separation distance of 1.5 cm between the back of the device or the front of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

We can identify that the results are the worst case when the device faces away the phantom. The results can prove the point. (see table 4 )

Position the device under the phantom. (see the Figure 3)



**Fig 2 - Definition of the reference lines and points, on the phone and on the phantom and initial position**

c) Position the device under the phantom on the condition of Flat.(see the Figure 3)



**Fig 3 – Face away the phantom with the distance of 15mm**

#### **4.5 Tests to be performed**

Tests shall be performed with both phone positions described in 4.4, on the left and right sides of the head and using the centre frequency of each operating band. The configuration giving rise to the maximum mass-averaged SAR shall be used to test the low-end and the high-end frequencies of the transmitting band. If the mobile phone has a retractable antenna, all of the tests described above shall be performed both with

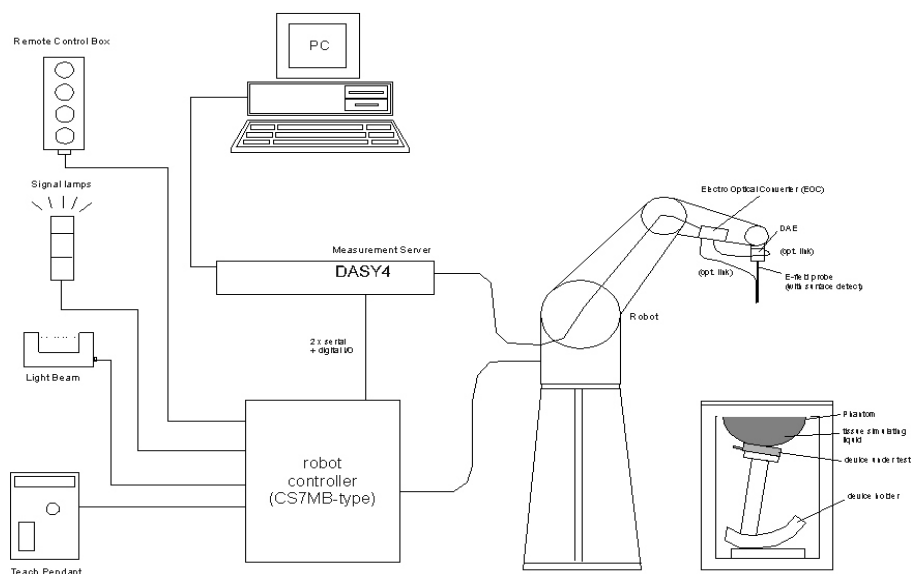
The antenna extended and with it retracted. When considering multi- mode and multi-band mobile phones, all of the above tests shall be performed in each transmitting mode/band with the corresponding maximum peak power level.

## **5. The Measurement system**

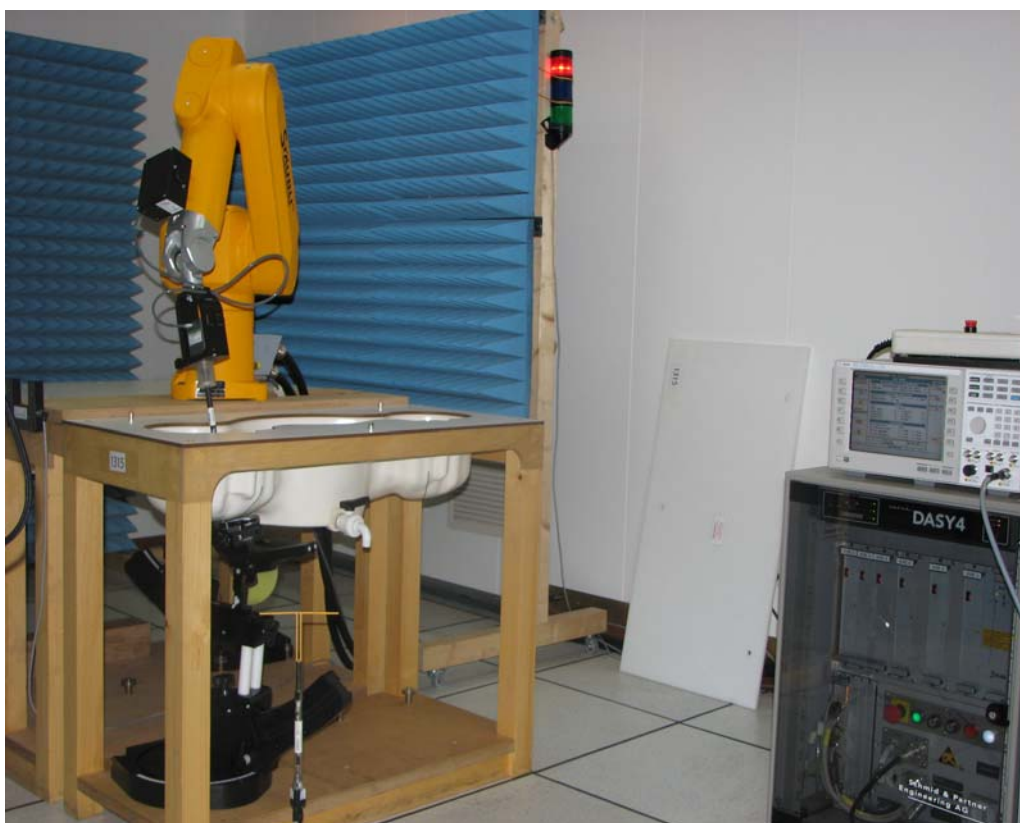
### **5.1 DASY4 Information**

DASY4 is an abbreviation of "Dosimetric Assessment System" and describes a system that is able to determine the SAR distribution inside a phantom of a human being according to different standards. The DASY4 system consists of the following items as shown in Fig3. Fig4 shows the installation in the SRTC laboratory [DASY2004].

- High precision robot with controller
- Measurement server(for surveillance of the robot operation and signal filtering)
- Data acquisition electronics DAE (for signal amplification and altering)
- Field probes calibrated for use in liquids
- Electro-optical converter EOC (conversion from the optical into a digital signal)
- Light beam (improving of the absolute probe positioning accuracy)
- Two SAM phantoms filled with tissue simulating liquid
- DASY4 software
- SEMCAD



**Fig3. The DASY4 measurement system**



**Fig 4. The measurement set-up with two SAM phantoms containing tissue simulating liquid**

## 5.2 Test Equipments:

| Test Equipment                  | Serial Number | Calibration interval | Calibration expiry |
|---------------------------------|---------------|----------------------|--------------------|
| DAE4                            | 720           | 1 year               | 2011.01            |
| Dosimetric E-field Probe ES3DV3 | 3128          | 1 year               | 2011.06            |
| Dipole Validation Kit, D900V2   | 171           | 2 years              | 2012.06            |
| DASY4 software Version          | 4.7           | N/A                  | N/A                |

Note: the Dipole Calibration interval is 24 months

Additional test equipment used in testing:

| Test Equipment       | Model  | Serial Number | Calibration interval | Calibration expiry |
|----------------------|--------|---------------|----------------------|--------------------|
| Signal Generator     | E4428C | MY45280865    | 1year                | 2011.08.20         |
| Amplifier            | 5S1G4  | 0323472       | N/A                  | N/A                |
| Power meter          | E4417A | MY45101182    | 1year                | 2011.08.20         |
| Power Sensor         | E4412A | MY41502214    | 1year                | 2011.08.20         |
| Power Sensor         | E4412A | MY41502130    | 1year                | 2011.08.20         |
| Call Tester          | 8960   | GB43194054    | 1year                | 2011.08.20         |
| Network Analyzer     | 8714ET | US40372083    | 1year                | 2011.08.20         |
| Dielectric Probe Kit | 85070D | US33030365    | N/A                  | N/A                |

**Table 1. Test Equipments lists**

## 5.3 Isotropic E-field Probe Type ES3DV3

|                           |                                                                                                                                                                                 |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction              | Symmetrical design with triangular core<br>Interleaved sensors Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |
| Calibration               | Calibration certificate in Appendix C                                                                                                                                           |
| Frequency                 | 10 MHz to 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 4 GHz)                                                                                                                      |
| Optical Surface Detection | $\pm 0.2$ mm repeatability in air and clear liquids over diffuse reflecting surfaces                                                                                            |
| Dimensions                | Overall length: 330 mm (Tip: 20 mm)<br>Tip diameter: 3.9 mm (Body: 12 mm)<br>Distance from probe tip to dipole centers: 2.0 mm                                                  |
| Dynamic Range             | 5 $\mu$ W/g to $> 100$ mW/g; Linearity: $\pm 0.2$ dB                                                                                                                            |
| Application               | General dosimetry up to 4 GHz<br>Dosimetry in strong gradient fields<br>Compliance tests of mobile phones                                                                       |

## 5.4 Uncertainty Assessment

| DASY4 Uncertainty Budget<br>According to IEC 62209-1 [3] |                   |             |            |                 |                  |               |                |                        |
|----------------------------------------------------------|-------------------|-------------|------------|-----------------|------------------|---------------|----------------|------------------------|
| Error description                                        | Uncertainty value | Prob. Dist. | Div.       | ( $c_i$ )<br>1g | ( $c_i$ )<br>10g | Std.Unc (1g). | Std.Unc. (10g) | ( $v_i$ )<br>$V_{eff}$ |
| <b>Measurement system</b>                                |                   |             |            |                 |                  |               |                |                        |
| Probe calibration                                        | ±5.9%             | N           | 1          | 1               | 1                | ±5.9%         | ±5.9%          | ∞                      |
| Axial isotropy                                           | ±4.7%             | R           | $\sqrt{3}$ | 0.7             | 0.7              | ±1.9%         | ±1.9%          | ∞                      |
| Hemispherical isotropy                                   | ±9.6%             | R           | $\sqrt{3}$ | 0.7             | 0.7              | ±3.9%         | ±3.9%          | ∞                      |
| Boundary effects                                         | ±1.0%             | R           | $\sqrt{3}$ | 1               | 1                | ±0.6%         | ±0.6%          | ∞                      |
| Linearity                                                | ±4.7%             | R           | $\sqrt{3}$ | 1               | 1                | ±2.7%         | ±2.7%          | ∞                      |
| System detection limits                                  | ±1.0%             | R           | $\sqrt{3}$ | 1               | 1                | ±0.6%         | ±0.6%          | ∞                      |
| Readout electronics                                      | ±0.3%             | N           | 1          | 1               | 1                | ±0.3%         | ±0.3%          | ∞                      |
| Response time                                            | ±0.8%             | R           | $\sqrt{3}$ | 1               | 1                | ±0.5%         | ±0.5%          | ∞                      |
| Integration time                                         | ±2.6%             | R           | $\sqrt{3}$ | 1               | 1                | ±1.5%         | ±1.5%          | ∞                      |
| RF ambient noise                                         | ±3.0%             | R           | $\sqrt{3}$ | 1               | 1                | ±1.7%         | ±1.7%          | ∞                      |
| RF ambient reflections                                   | ±3.0%             | R           | $\sqrt{3}$ | 1               | 1                | ±1.7%         | ±1.7%          | ∞                      |
| Probe positioner                                         | ±0.4%             | R           | $\sqrt{3}$ | 1               | 1                | ±0.2%         | ±0.2%          | ∞                      |
| Probe positioning                                        | ±2.9%             | R           | $\sqrt{3}$ | 1               | 1                | ±1.7%         | ±1.7%          | ∞                      |
| Max.SAR Eval.                                            | ±1.0%             | R           | $\sqrt{3}$ | 1               | 1                | ±0.6%         | ±0.6%          | ∞                      |
| <b>Test Sample Related</b>                               |                   |             |            |                 |                  |               |                |                        |
| Device Positioning                                       | ±2.9%             | N           | 1          | 1               | 1                | ±2.9%         | ±2.9%          | 145                    |
| Device holder                                            | ±3.6%             | N           | 1          | 1               | 1                | ±3.6%         | ±3.6%          | 5                      |
| Power drift                                              | ±5.0%             | R           | $\sqrt{3}$ | 1               | 1                | ±2.9%         | ±2.9%          | ∞                      |
| <b>Phantom and Setup</b>                                 |                   |             |            |                 |                  |               |                |                        |
| Phantom uncertainty                                      | ±4.0%             | R           | $\sqrt{3}$ | 1               | 1                | ±2.3%         | ±2.3%          | ∞                      |
| Liquid conductivity(target)                              | ±5.0%             | R           | $\sqrt{3}$ | 0.64            | 0.43             | ±1.8%         | ±1.2%          | ∞                      |
| Liquid conductivity(meas.)                               | ±2.5%             | N           | 1          | 0.64            | 0.43             | ±1.6%         | ±1.1%          | ∞                      |
| Liquid conductivity(target)                              | ±5.0%             | R           | $\sqrt{3}$ | 0.6             | 0.49             | ±1.7%         | ±1.4%          | ∞                      |
| Liquid onductivity(means.)                               | ±2.5%             | N           | 1          | 0.6             | 0.49             | ±1.5%         | ±1.2%          | ∞                      |
| Combined std. Uncertainty                                |                   |             |            |                 |                  | ±10.9%        | ±10.7%         | 387                    |

|                          |  |  |  |  |        |        |  |
|--------------------------|--|--|--|--|--------|--------|--|
| Expanded STD Uncertainty |  |  |  |  | ±21.9% | ±21.4% |  |
|--------------------------|--|--|--|--|--------|--------|--|

Table 2. Uncertainty assessment

## 6. Test Results

### 6.1 Test Environment:

The Ambient Conditions during SAR Test  
Relative Humidity: 34.5%

Temp.: 23° C~24° C  
Atmosphere: 101.0kPa

### 6.2 Test Method and Procedure

a) Measure the local SAR at a test point within 10 mm of the inner surface of the phantom. The test point shall also be close to the ear;

b) verify that the measured SAR at the point used in item 1 is stable after 3 minutes within  $\pm 5\%$  in order to ensure that there is no drift due to the mobile phone electronics;

c) Measure the SAR distribution within the phantom. The spatial grid step shall be less than 20 mm. If surface scanning is used, then the distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be constant within  $\pm 0.5$  mm and less than 8 mm. If volume scanning is performed, then the scanning volume shall be as close as possible to the inner surface of the phantom (less than 8 mm), the grid step shall be 5 mm or less, the grid shall extend to a depth of 25 mm and then go directly to item 6;

d) From the scanned SAR distribution, identify the position of the maximum SAR value, as well as the positions of any local maxima with SAR values of more than 50 % of the maximum value;

e) Measure SAR with a grid step less than 5 mm in a volume with a minimum size of 30 mm by 30 mm and 25 mm in depth. Separate grids shall be centred on each of the local SAR maxima;

f) Use interpolation and extrapolation procedures defined in annex C of IEC 62209-1-2005 to determine the local SAR values at the spatial resolution needed for mass averaging;

g) Repeat the SAR measurement at the initial test point used in item 1. If the two results differ by more than  $\pm 5\%$  from the final value obtained in item 2, the measurements shall be repeated with a fully charged battery or the actual drift shall be included in the uncertainty evaluation.

Tests shall be performed with both phone positions of cheek and tilted, on the left and right sides of the head and using the centre frequency of each operating band. Then the configuration giving rise to the maximum mass-averaged SAR shall be used to test the low-end and the high-end

frequencies of the transmitting band. If the mobile phone has a retractable antenna, all of the tests described above shall be performed both with the antenna extended and with it retracted. When considering multi- mode and multi-band mobile phones, all of the above tests shall be performed in each transmitting mode/band with the corresponding maximum peak power level.

### 6.3 Test Configuration

The test shall be performed in the shield room.

Please refer to chapter 7.2 of this report for the test mode used during testing.

Please refer to chapter 7.8; 7.9 of this test report for photo of this test setup.

### 6.4 Test Results

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure the maximum power transmission and proper modulation. This result contains conducted output power and ERP for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement. The internal photo exhibit shows the BT and GSM antennas being more than 5cm apart. When this is the case, SAR testing is only required for 835MHz. Bluetooth would not be included in the SAR report.

#### Mode: CDMA 835

$f_L(\text{MHz})=824.70\text{MHz}$        $f_M(\text{MHz})=836.52\text{MHz}$        $f_H(\text{MHz})= 848.31\text{MHz}$

**SAR Values (Head, 835MHz Band SO55 RC3 FULL RATE)**

| Limit of SAR (W/kg)               | 1 g Average                |
|-----------------------------------|----------------------------|
|                                   | 1.6                        |
| Test Case                         | Measurement Result ( mW/g) |
|                                   | 1 g Average                |
| Left hand, Touch cheek , $f_L$    | 1.10                       |
| Left hand, Touch cheek, $f_M$     | <b>1.31</b>                |
| Left hand, Touch cheek , $f_H$    | 1.04                       |
| Left hand, Tilt 15 Degree, $f_M$  | 0.76                       |
| Right hand, Touch cheek , $f_L$   | 1.16                       |
| Right hand, Touch cheek, $f_M$    | 1.30                       |
| Right hand, Touch cheek $f_H$     | 1.07                       |
| Right hand, Tilt 15 Degree, $f_M$ | 0.74                       |

So, the maximum SAR is

| Phantom Configuration | Device Test Position | SAR(mW/g)   |             |             |
|-----------------------|----------------------|-------------|-------------|-------------|
|                       |                      | $f_L$ (MHz) | $f_M$ (MHz) | $f_H$ (MHz) |
| left Side             | cheek                | ---         | <b>1.31</b> | ----        |

Note1: Please refer to 7.7 of this test report for graphical results.

**Table 3. SAR Results**

**Mode: CDMA 835**

$f_L$ (MHz)=824.70MHz

$f_M$ (MHz)=836.52MHz

$f_H$ (MHz)= 848.31MHz

SAR Values (Body, 835MHz Band with headset SO32 RC3 FCH-SCH)

| Limit of SAR (W/kg)  | 1g Average                 |
|----------------------|----------------------------|
|                      | 1.6                        |
| Test Case            | Measurement Result ( mW/g) |
|                      | 1g Average                 |
| Towards ground $f_L$ | 0.79                       |
| Towards ground $f_M$ | <b>0.89</b>                |
| Towards ground $f_H$ | 0.83                       |

|                 |       |      |
|-----------------|-------|------|
| Towards phantom | $f_H$ | ---  |
| Towards phantom | $f_M$ | 0.42 |
| Towards phantom | $f_L$ | ---  |

So, the maximum SAR is

| Phantom<br>Configuration | SAR(mW/g)   |             |             |
|--------------------------|-------------|-------------|-------------|
|                          | $f_L$ (MHz) | $f_M$ (MHz) | $f_H$ (MHz) |
| Towards ground           | ---         | 0.89        | ---         |

**Table 4. SAR Results**

## 7. Appendix

### 7.1 Administrative Data

Date of measurement: 2010.10.25  
Data stored: SRTC2010-H024-E0024

### 7.2 Device under Test and Test Conditions

TYPE: ZTE-C S160  
SN: 321883010001  
Equipment class: Portable device  
EUT status: production  
Power Class: 23.0dBm  
RF exposure environment: General Population  
Power supply: Internal Battery (Other batteries not available)  
Measurement Standards: IS2000  
Method to establish a call: CDMA 2000 Base station simulator, using the air interface

Modulation: OQPSK  
Tx: 824~849MHz  
Rx: 869~894MHz  
Used TX Channels: L: ch1013; M: ch384; H: ch777 (refer to the table 5)  
Duty cycle: 1:1(100%)

#### Head SAR Measurements

SAR for head exposure configurations was measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55. SAR for RC1 was not required when the maximum average output of each channel was less than  $\frac{1}{4}$  dB higher than that measured in RC3. Otherwise, SAR was measured on the maximum output channel in RC1 using the exposure configuration that results in the highest SAR for that channel in RC3.

#### Body SAR Measurements

SAR for body exposure configurations was measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. SAR for multiple code channels (FCH + SCHn) was not required when the maximum average output of each RF channel was less than  $\frac{1}{4}$ dB higher than that measured with FCH only. Otherwise, SAR was measured on the maximum output channel (FCH + SCHn) with FCH at full rate and SCH0 enabled at 9600 bps using the exposure configuration that results in the highest SAR for that channel with FCH only. When multiple code channels were enabled, the DUT output may shift by more than 0.5 dB and lead to higher SAR drifts and SCH dropouts.

Body SAR in RC1 was not required when the maximum average output of each channel was less than  $\frac{1}{4}$ dB higher than that measured in RC3. Otherwise, SAR was measured on the maximum output channel in RC1; with Loopback Service Option SO55, at full rate, using the body exposure configuration that resulted in the highest SAR for that channel in RC3.

**Note: All the procedures described above were followed according to FCC" SAR Measurement Procedure for 3G Devices, June 2006"**

Test communication setup meet as followings:

|                                                                          |                                                  |
|--------------------------------------------------------------------------|--------------------------------------------------|
| Communication standard between mobile station and base station simulator | 3GPP2 C.S0011-B                                  |
| Radio configuration                                                      | RC3(supporting CDMA 1X)                          |
| Date Rate                                                                | 9600bps                                          |
| Service Options                                                          | SO55(Loop back mode)                             |
| Service Options                                                          | SO32(Test Date mode)                             |
| Multiplex Options                                                        | The mobile station does not support this service |

Base station Simulator: 8960

Test Parameter setup for maximum RF output power according to section 4.4.5 of 3GPP2 C.S0011-B:

Parameters for Max. Power for RC1

| Parameter                    | Units        | Value |
|------------------------------|--------------|-------|
| $I_{or}$                     | dBm/1.23 MHz | -104  |
| $\frac{Pilot E_c}{I_{or}}$   | dB           | -7    |
| $\frac{Traffic E_c}{I_{or}}$ | dB           | -7.4  |

Parameters for Max. Power for RC3

| Parameter                    | Units        | Value |
|------------------------------|--------------|-------|
| $I_{or}$                     | dBm/1.23 MHz | -86   |
| $\frac{Pilot E_c}{I_{or}}$   | dB           | -7    |
| $\frac{Traffic E_c}{I_{or}}$ | dB           | -7.4  |

**Mode: SO55 RC1Full rate**

| Carrier frequency (MHz) | Channel No. | RF Power Output (dBm) |
|-------------------------|-------------|-----------------------|
| 824.70                  | 1013        | 23.91                 |
| 836.52                  | 384         | 23.91                 |
| 848.31                  | 777         | 23.80                 |

**Mode: SO55 RC3 Full rate**

| Carrier frequency (MHz) | Channel No. | RF Power Output (dBm) |
|-------------------------|-------------|-----------------------|
| 824.70                  | 1013        | 23.91                 |
| 836.52                  | 384         | 23.91                 |
| 848.31                  | 777         | 23.91                 |

**Mode:SO32 RC3 FCH-SCH**

| Carrier frequency (MHz) | Channel No. | RF Power Output (dBm) |
|-------------------------|-------------|-----------------------|
| 824.70                  | 1013        | 23.86                 |
| 836.52                  | 384         | 23.86                 |
| 848.31                  | 777         | 23.86                 |

**Mode:SO32 RC3 FCH+SCH**

| Carrier frequency (MHz) | Channel No. | RF Power Output (dBm) |
|-------------------------|-------------|-----------------------|
| 824.70                  | 1013        | 23.85                 |
| 836.52                  | 384         | 23.85                 |
| 848.31                  | 777         | 23.86                 |

\*RC Configuration tested at “all up” power control bit.

**Table5. Frequency and Measured power of EUT's Tx channels**

For SAR test, the maximum power output is very important and essential; it is identical under the measurement uncertainty. It is proper to use typical Test Mode 3 (FW RC3, RVS RC3, SO55) as the worst case for SAR test.

Under the loop back mode between mobile station and 8960, the transmitter continuously emits with maximum power more strong than voice mode, so the SAR test was done with loop back mode.

Used Phantom: SAM Twin Phantom V4.0, as defined by IEC 62209-1-2005 and delivered by Schmid&Parb1er Engineering AG.

## 7.3 Tissue Recipes

### Head Tissue Simulant

The following recipes are provided in percentage by weight.

#### 835 MHz:

|         |           |
|---------|-----------|
| 40.29 % | Water     |
| 57.90 % | Sugar     |
| 1.38%   | NaCl salt |
| 0.24%   | Cellulose |
| 0.18%   | Preventol |

### Body Tissue Simulant

The following recipes are provided in percentage by weight.

#### 835MHz:

|         |           |
|---------|-----------|
| 50.75 % | Water     |
| 48.21 % | Sugar     |
| 0.94%   | NaCl salt |
| 0%      | Cellulose |
| 0.10%   | Preventol |

## 7.4 Material Parameters

For the measurement of the following parameters the HP 85070D dielectric probe kit is used, representing the open-ended coaxial probe measurement procedure. Liquid temperature during the test: 22.3° C.

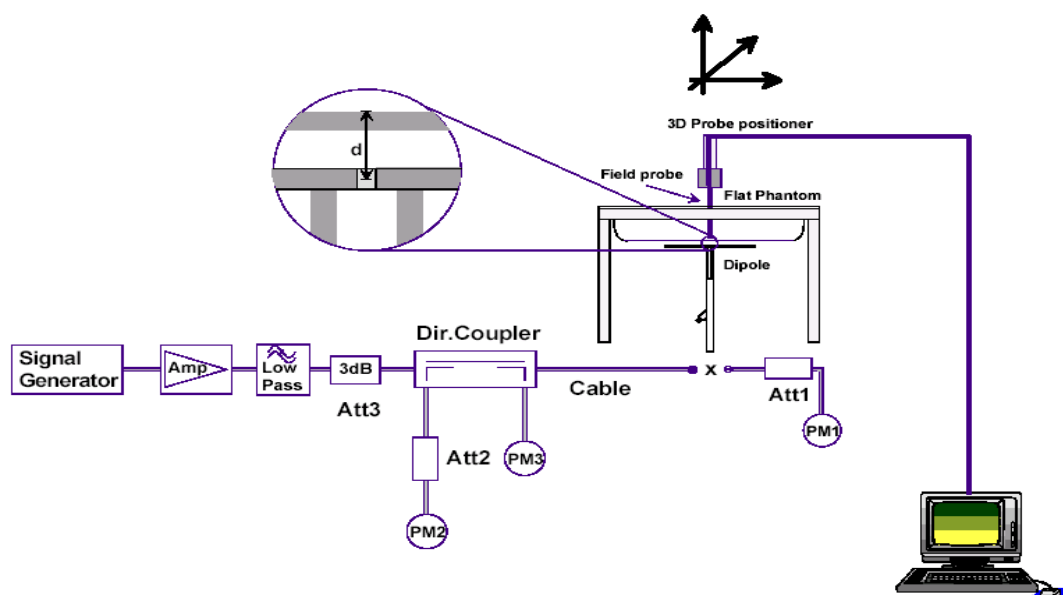
| Head   |                   | $\epsilon_r$ | $\sigma$ [S/m] | Temperature     |                |
|--------|-------------------|--------------|----------------|-----------------|----------------|
|        |                   |              |                | Ambient<br>[°C] | Liquid<br>[°C] |
| 835MHz | Recommended Value | 41.5±2.1     | 0.9±0.045      | 15-30           | -              |
|        | Measured Value    | 41.5         | 0.89           | 24.0            | 22.3           |

| Body   |                   | $\epsilon_r$ | $\sigma$ [S/m] | Temperature     |                |
|--------|-------------------|--------------|----------------|-----------------|----------------|
|        |                   |              |                | Ambient<br>[°C] | Liquid<br>[°C] |
| 835MHz | Recommended Value | 55.2±2.76    | 0.97±0.0485    | 15-30           | ---            |
|        | Measured Value    | 53.7         | 0.99           | 24.0            | 22.3           |

**Table6: Parameters of the head tissue simulating liquids**

## 7.5 Setup for System Performance Check

(see also Chapter 15 System Performance Check of DAY 4 System handbook)



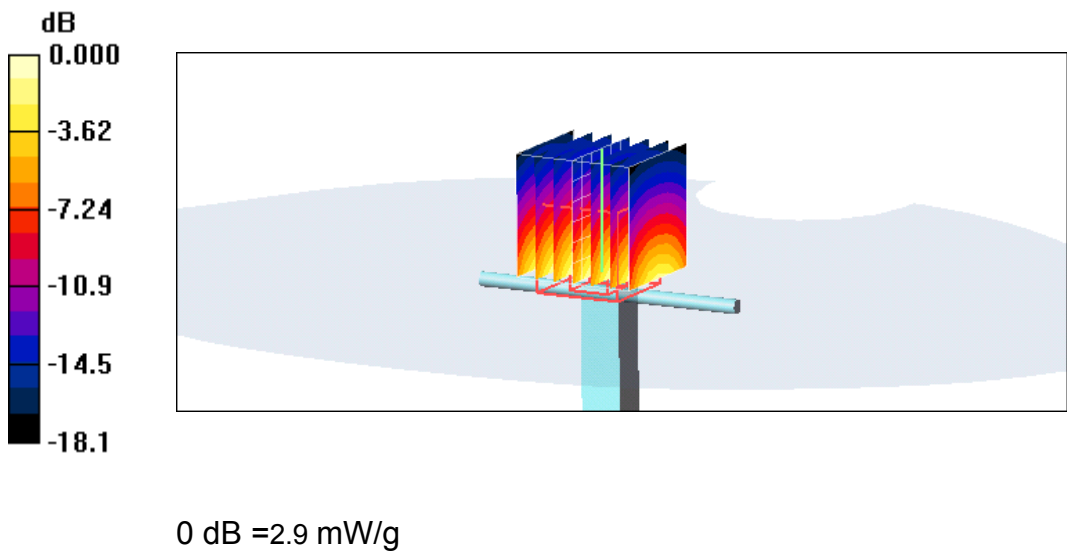
**Fig5. Setup for system performance Check**

First the power meter PM1 is connected to the cable and it measures the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the (Att1) value) and the power meter PM2 is read at that level. Then after connecting the cable to the dipole, the signal generator is readjusted for the same reading at the power meter PM2. If the signal generator does not allow a setting in 0,01 dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole and ensures that the value is not changed from the previous value. The reflected power should be 20 dB below the forwarded power.

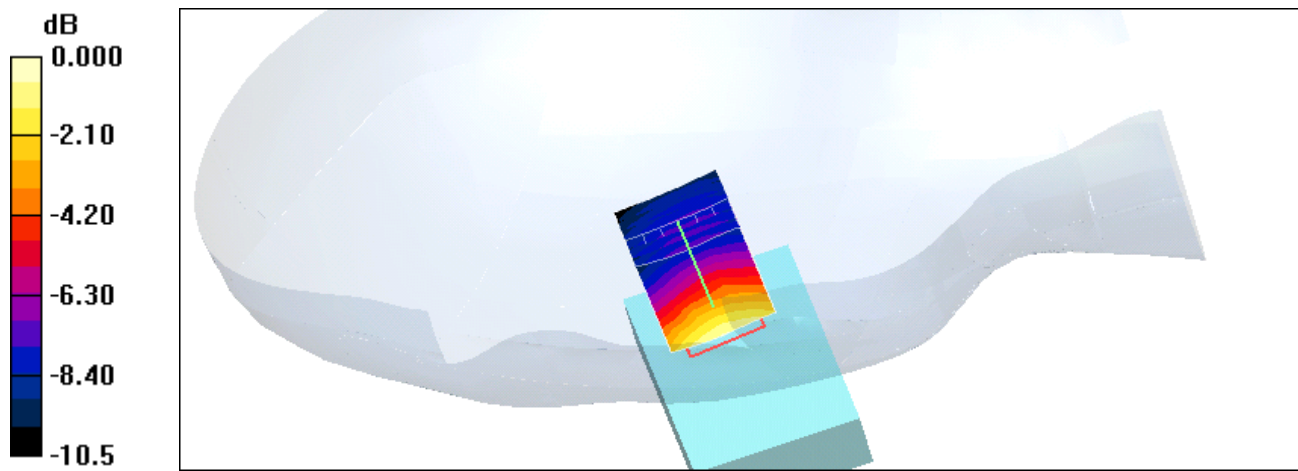
| Error description               | ToL.      | Prob. Dist. | Div.       | ( $c_i$ )<br>1g | ( $c_i$ )<br>10g | Std.Unc<br>(1g). | Std.Unc<br>(10g) | ( $v_i$ )<br>$V_{eff}$ |
|---------------------------------|-----------|-------------|------------|-----------------|------------------|------------------|------------------|------------------------|
| <b>Measurement system</b>       |           |             |            |                 |                  |                  |                  |                        |
| Probe calibration               | ±5.9%     | N           | 1          | 1               | 1                | ±5.9%            | ±5.9%            | ∞                      |
| Axial isotropy                  | ±4.7%     | R           | $\sqrt{3}$ | 1               | 1                | ±2.7%            | ±2.7%            | ∞                      |
| Hemispherical isotropy          | ±9.6%     | R           | $\sqrt{3}$ | 0               | 0                | 0                | 0                | ∞                      |
| Boundary effects                | ±1.0%     | R           | $\sqrt{3}$ | 1               | 1                | ±0.6%            | ±0.6%            | ∞                      |
| Linearity                       | ±4.7%     | R           | $\sqrt{3}$ | 1               | 1                | ±2.7%            | ±2.7%            | ∞                      |
| System detection limits         | ±1.0%     | R           | $\sqrt{3}$ | 1               | 1                | ±0.6%            | ±0.6%            | ∞                      |
| Readout electronics             | ±0.3%     | N           | 1          | 1               | 1                | ±0.3%            | ±0.3%            | ∞                      |
| Response time                   | 0         | R           | $\sqrt{3}$ | 1               | 1                | 0                | 0                | ∞                      |
| Integration time                | 0         | R           | $\sqrt{3}$ | 1               | 1                | 0                | 0                | ∞                      |
| RF ambient noise                | ±3.0%     | R           | $\sqrt{3}$ | 1               | 1                | ±1.7%            | ±1.7%            | ∞                      |
| RF ambient reflections          | ±3.0%     | R           | $\sqrt{3}$ | 1               | 1                | ±1.7%            | ±1.7%            | ∞                      |
| Probe positioner                | ±0.4%     | R           | $\sqrt{3}$ | 1               | 1                | ±0.2%            | ±0.2%            | ∞                      |
| Probe positioning               | ±2.9%     | R           | $\sqrt{3}$ | 1               | 1                | ±1.7%            | ±1.7%            | ∞                      |
| Algorithms for Max.SAR Eval.    | ±1.0%     | R           | $\sqrt{3}$ | 1               | 1                | ±0.6%            | ±0.6%            | ∞                      |
| <b>Dipole</b>                   |           |             |            |                 |                  |                  |                  |                        |
| Dipole Axis to Liquid Distance  | ±2.0%     | R           | $\sqrt{3}$ | 1               | 1                | ±1.2%            | ±1.2%            | ∞                      |
| Input power and SAR drift meas. | ±4.7%     | N           | 1          | 1               | 1                | ±2.7%            | ±2.7%            | ∞                      |
| <b>Phantom and Tissue Param</b> |           |             |            |                 |                  |                  |                  |                        |
| Phantom uncertainty             | ±4.0%     | R           | $\sqrt{3}$ | 1               | 1                | ±2.3%            | ±2.3%            | ∞                      |
| Liquid conductivity(target)     | ±5.0%     | R           | $\sqrt{3}$ | 0.64            | 0.43             | ±1.8%            | ±1.2%            | ∞                      |
| Liquid conductivity(meas.)      | ±2.5%     | N           | 1          | 0.64            | 0.43             | ±1.6%            | ±1.1%            | ∞                      |
| Liquid conductivity(target)     | ±5.0%     | R           | $\sqrt{3}$ | 0.6             | 0.49             | ±1.7%            | ±1.4%            | ∞                      |
| Liquid conductivity (means.)    | ±2.5%     | N           | 1          | 0.6             | 0.49             | ±1.5%            | ±1.2%            | ∞                      |
| Combined std. Uncertainty       |           |             |            |                 |                  | ±9.2%            | ±8.9%            | ∞                      |
| Coverage Factor for 95%         | $k_p = 2$ |             |            |                 |                  |                  |                  |                        |
| Expanded STD Uncertainty        |           |             |            |                 |                  | ±18.4%           | ±17.8%           |                        |

**Table 7:Uncertainty Budget for the system performance check**

## 7.6 Test Results

| SYSTEM CHECKING SCANS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 835MHz |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| <p><b>DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:171</b><br/> Medium parameters used (interpolated): <math>f = 900 \text{ MHz}</math>; <math>\sigma = 0.95 \text{ mho/m}</math>; <math>\epsilon_r = 40.7</math>; <math>\rho = 1000 \text{ kg/m}^3</math></p> <p>DASY4 Configuration:</p> <ul style="list-style-type: none"> <li>- Probe: ES3DV3 - SN3128; ConvF(7.88, 8.3, 8.05); Calibrated: 6/22/2010</li> <li>- Sensor-Surface: 4mm (Mechanical Surface Detection)</li> <li>- Electronics: DAE4 - SN720; Calibrated: 1/18/2010</li> <li>- Phantom: SAM 1560; Type: SAM; Serial: 1560</li> <li>- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186</li> </ul> <p><b>d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:</b> Measurement grid:<br/> <math>dx=5\text{mm}</math>, <math>dy=5\text{mm}</math>, <math>dz=5\text{mm}</math><br/> Reference Value = 56.3V/m; Power Drift = -0.047 dB<br/> Peak SAR (extrapolated) = 4.08 W/kg<br/> <b>SAR(1 g) = 2.72 mW/g; SAR(10 g) = 1.30 mW/g</b><br/> Maximum value of SAR (measured) = 2.9 mW/g</p> <div data-bbox="258 1160 1329 1713">  <p>0 dB = 2.9 mW/g</p> </div> |        |

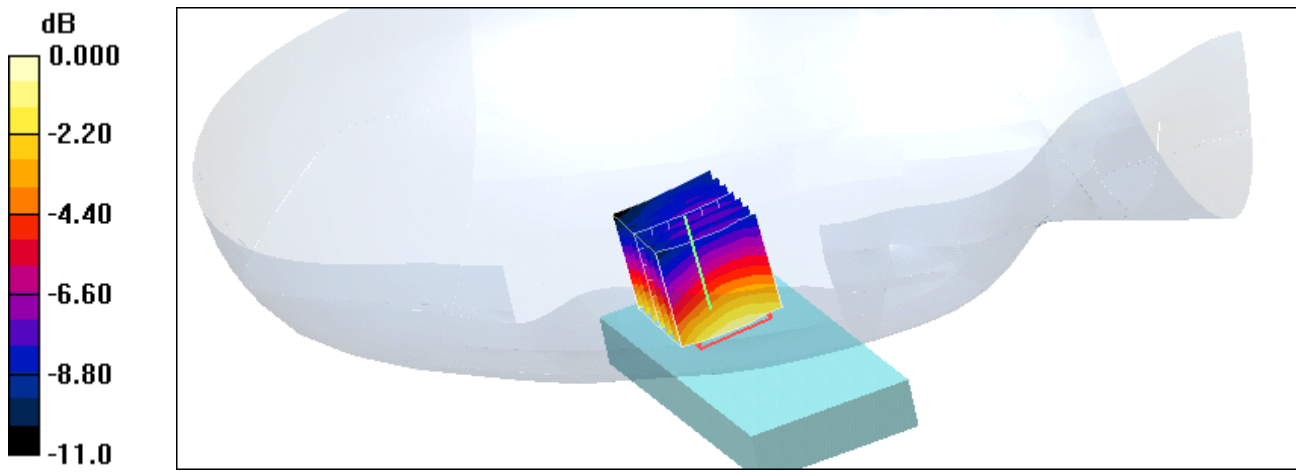
## 835MHz/Head

| Right Side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Cheek | 824.7MHz |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------|
| <p>Communication System: cdma 835; Frequency: 824.7 MHz;Duty Cycle: 1:1<br/> Medium parameters used (interpolated): <math>f = 824.7 \text{ MHz}</math>; <math>\sigma = 0.961 \text{ mho/m}</math>; <math>\epsilon_r = 39.6</math>;<br/> <math>\rho = 1000 \text{ kg/m}^3</math><br/> Phantom section: Right Section</p> <p>DASY4 Configuration:<br/> - Probe: ES3DV3 - SN3128; ConvF(7.88, 8.3, 8.05); Calibrated: 6/22/2010<br/> - Sensor-Surface: 4mm (Mechanical Surface Detection)<br/> - Electronics: DAE4 - SN720; Calibrated: 1/18/2010<br/> - Phantom: SAM 1560; Type: SAM; Serial: 1560<br/> - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186</p> <p>Touch position-low RC3 S055/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,<br/> dy=5mm, dz=5mm<br/> Reference Value = 29.3 V/m; Power Drift = -0.149 dB<br/> Peak SAR (extrapolated) = 1.65 W/kg<br/> SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.820 mW/g</p> <p>Info: Interpolated medium parameters used for SAR evaluation.<br/> Maximum value of SAR (measured) = 1.25 mW/g</p> <div>  <p>0 dB = 1.25mW/g</p> </div> |       |          |

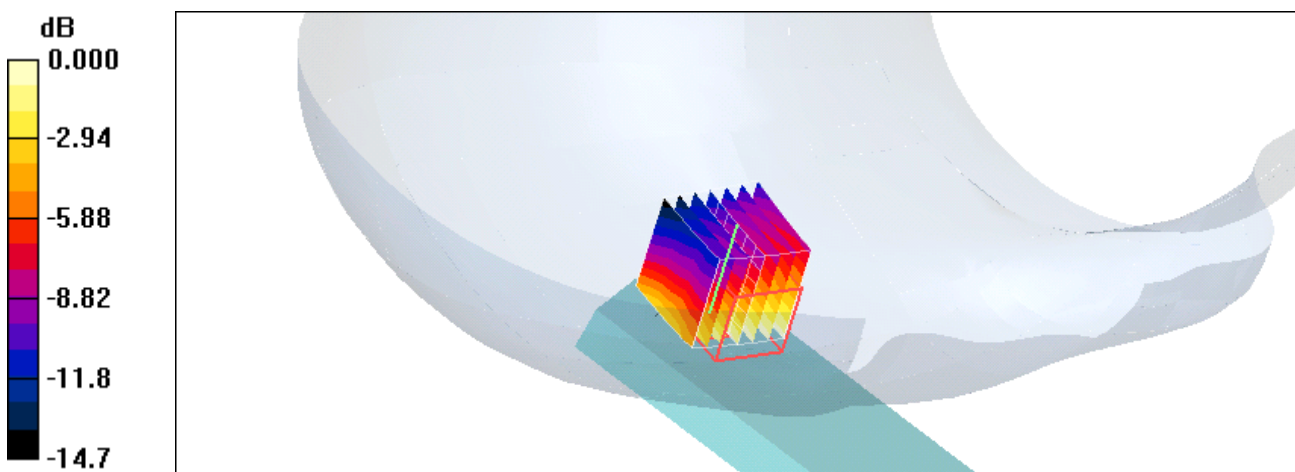
**Fig6 SAR Test result**

| Right Side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Cheek | 836.52MHz |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-----------|
| <p>Communication System: cdma 835; Frequency: 836.52 MHz;Duty Cycle: 1:1<br/> Medium parameters used (interpolated): <math>f = 836.52 \text{ MHz}</math>; <math>\sigma = 0.978 \text{ mho/m}</math>; <math>\epsilon_r = 39.4</math>;<br/> <math>\rho = 1000 \text{ kg/m}^3</math><br/> Phantom section: Right Section</p> <p>DASY4 Configuration:<br/> - Probe: ES3DV3 - SN3128; ConvF(7.88, 8.3, 8.05); Calibrated: 6/22/2010<br/> - Sensor-Surface: 4mm (Mechanical Surface Detection)<br/> - Electronics: DAE4 - SN720; Calibrated: 1/18/2010<br/> - Phantom: SAM 1560; Type: SAM; Serial: 1560<br/> - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186</p> <p>Touch position-Middle RC3 S055/Zoom Scan (7x7x7)/Cube 0: Measurement grid:<br/> <math>dx=5\text{mm}</math>, <math>dy=5\text{mm}</math>, <math>dz=5\text{mm}</math><br/> Reference Value = 31.0 V/m; Power Drift = -0.209 dB<br/> Peak SAR (extrapolated) = 1.85 W/kg<br/> SAR(1 g) = 1.30 mW/g; SAR(10 g) = 0.890 mW/g</p> <p>Info: Interpolated medium parameters used for SAR evaluation.<br/> Maximum value of SAR (measured) = 1.40 mW/g</p> <div> <p>0 dB = 1.40mW/g</p> </div> |       |           |

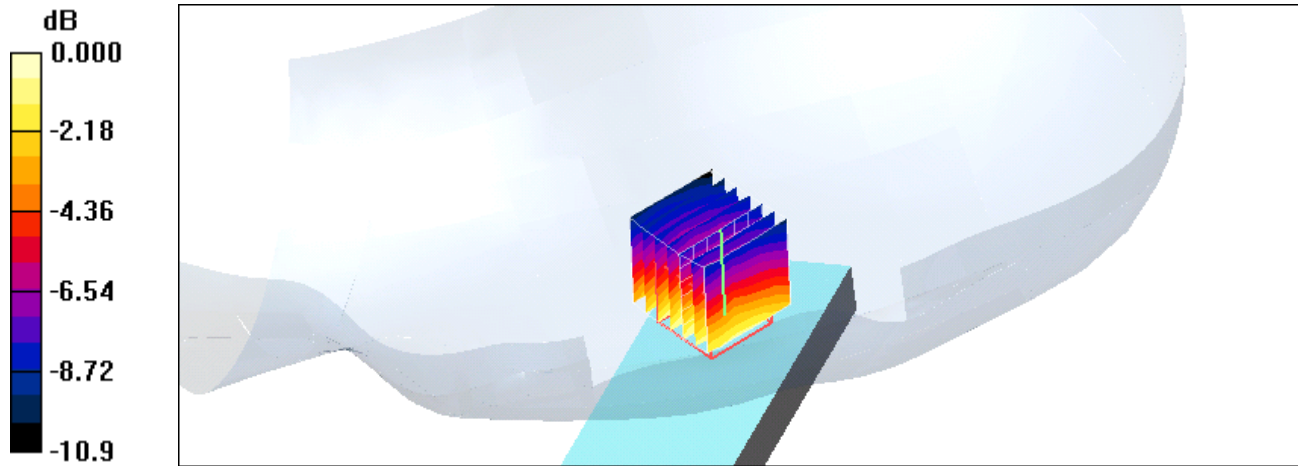
**Fig7 SAR Test result**

| Right Side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Cheek | 848.31MHz |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-----------|
| <p>Communication System: cdma 835; Frequency: 848.3 MHz;Duty Cycle: 1:1<br/>Medium parameters used (interpolated): <math>f = 848.3 \text{ MHz}</math>; <math>\sigma = 0.986 \text{ mho/m}</math>; <math>\epsilon_r = 40.3</math>;<br/><math>\rho = 1000 \text{ kg/m}^3</math><br/>Phantom section: Right Section</p> <p>DASY4 Configuration:</p> <ul style="list-style-type: none"> <li>- Probe: ES3DV3 - SN3128; ConvF(7.88, 8.3, 8.05); Calibrated: 6/22/2010</li> <li>- Sensor-Surface: 4mm (Mechanical Surface Detection)</li> <li>- Electronics: DAE4 - SN720; Calibrated: 1/18/2010</li> <li>- Phantom: SAM 1560; Type: SAM; Serial: 1560</li> <li>- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186</li> </ul> <p>Touch position-high RC3 S055/Zoom Scan (7x7x7)/Cube 0: Measurement grid:<br/>dx=5mm, dy=5mm, dz=5mm<br/>Reference Value = 26.7 V/m; Power Drift = 0.086 dB<br/>Peak SAR (extrapolated) = 1.52 W/kg<br/>SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.754 mW/g</p> <p>Info: Interpolated medium parameters used for SAR evaluation.<br/>Maximum value of SAR (measured) = 1.14 mW/g</p> <div>  <p>0 dB = 1.14mW/g</p> </div> |       |           |

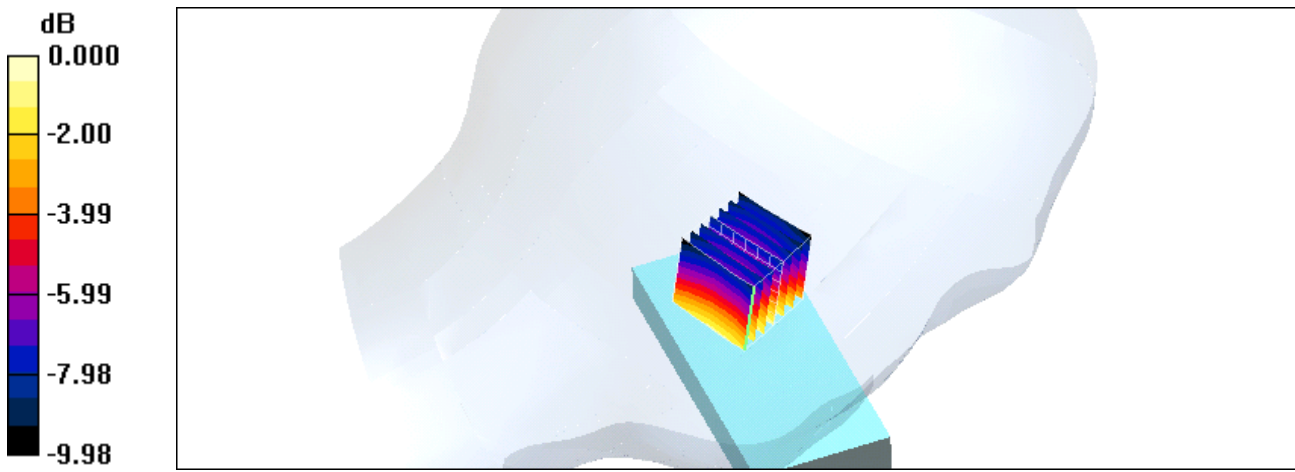
**Fig8 SAR Test result**

| Right Side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Tilt | 836.52MHz |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----------|
| <p>Communication System: cdma 835; Frequency: 836.52 MHz;Duty Cycle: 1:1<br/> Medium parameters used (interpolated): <math>f = 836.52 \text{ MHz}</math>; <math>\sigma = 0.978 \text{ mho/m}</math>; <math>\epsilon_r = 39.4</math>;<br/> <math>\rho = 1000 \text{ kg/m}^3</math><br/> Phantom section: Right Section</p> <p>DASY4 Configuration:<br/> - Probe: ES3DV3 - SN3128; ConvF(7.88, 8.3, 8.05); Calibrated: 6/22/2010<br/> - Sensor-Surface: 4mm (Mechanical Surface Detection)<br/> - Electronics: DAE4 - SN720; Calibrated: 1/18/2010<br/> - Phantom: SAM 1560; Type: SAM; Serial: 1560<br/> - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186</p> <p>Tilt position-middle RC3 S055/Zoom Scan (7x7x7)/Cube 0: Measurement grid:<br/> dx=5mm, dy=5mm, dz=5mm<br/> Reference Value = 22.6 V/m; Power Drift = -0.026 dB<br/> Peak SAR (extrapolated) = 1.52 W/kg<br/> SAR(1 g) = 0.740 mW/g; SAR(10 g) = 0.444 mW/g</p> <p>Info: Interpolated medium parameters used for SAR evaluation.<br/> Maximum value of SAR (measured) = 0.886 mW/g</p> <div>  <p>0 dB = 0.886mW/g</p> </div> |      |           |

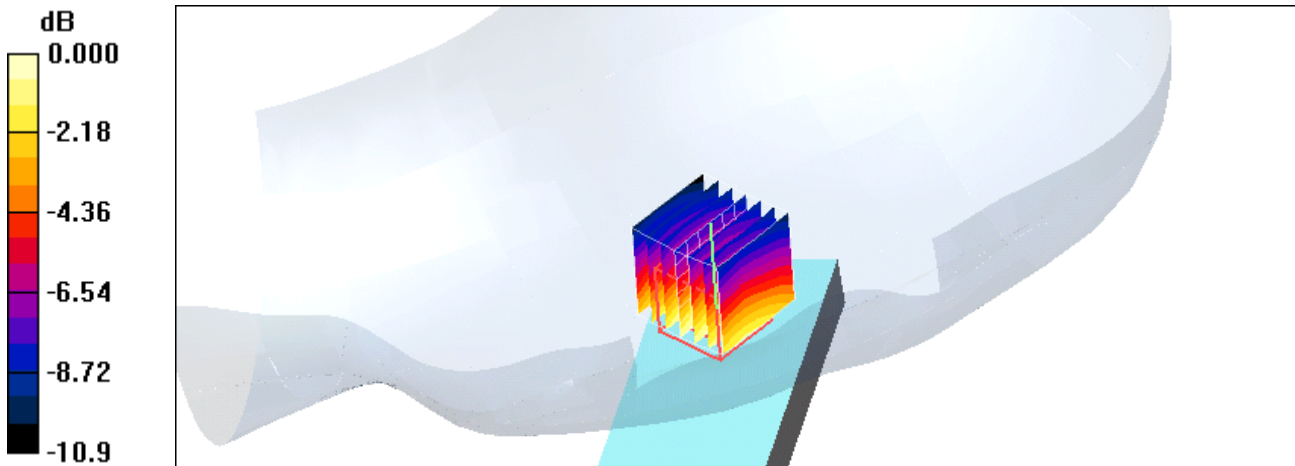
**Fig9 SAR Test result**

| Left Side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Cheek | 824.7 MHz |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-----------|
| <p>Communication System: cdma 835; Frequency: 824.7 MHz;Duty Cycle: 1:1<br/> Medium parameters used (interpolated): <math>f = 824.7 \text{ MHz}</math>; <math>\sigma = 0.961 \text{ mho/m}</math>; <math>\epsilon_r = 39.6</math>;<br/> <math>\rho = 1000 \text{ kg/m}^3</math><br/> Phantom section: Left Section</p> <p>DASY4 Configuration:</p> <ul style="list-style-type: none"> <li>- Probe: ES3DV3 - SN3128; ConvF(7.88, 8.3, 8.05); Calibrated: 6/22/2010</li> <li>- Sensor-Surface: 4mm (Mechanical Surface Detection)</li> <li>- Electronics: DAE4 - SN720; Calibrated: 1/18/2010</li> <li>- Phantom: SAM 1560; Type: SAM; Serial: 1560</li> <li>- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186</li> </ul> <p>Touch position-low RC3 S055/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,<br/> dy=5mm, dz=5mm<br/> Reference Value = 27.2 V/m; Power Drift = -0.027 dB<br/> Peak SAR (extrapolated) = 1.60 W/kg<br/> SAR(1 g) = 1.10 mW/g; SAR(10 g) = 0.777 mW/g</p> <p>Info: Interpolated medium parameters used for SAR evaluation.<br/> Maximum value of SAR (measured) = 1.21 mW/g</p> <div>  <p>0 dB = 1.21mW/g</p> </div> |       |           |

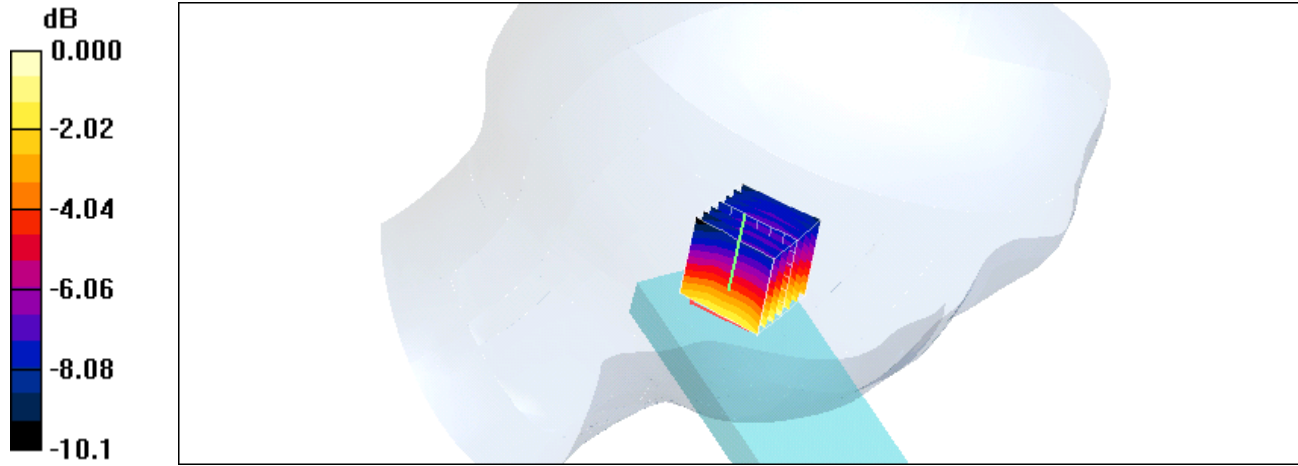
**Fig10 SAR Test result**

| Left Side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Cheek | 836.52MHz |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-----------|
| <p>Communication System: cdma 835; Frequency: 836.52 MHz;Duty Cycle: 1:1<br/> Medium parameters used (interpolated): <math>f = 836.52 \text{ MHz}</math>; <math>\sigma = 0.978 \text{ mho/m}</math>; <math>\epsilon_r = 39.4</math>;<br/> <math>\rho = 1000 \text{ kg/m}^3</math><br/> Phantom section: Left Section</p> <p>DASY4 Configuration:</p> <ul style="list-style-type: none"> <li>- Probe: ES3DV3 - SN3128; ConvF(7.88, 8.3, 8.05); Calibrated: 6/22/2010</li> <li>- Sensor-Surface: 4mm (Mechanical Surface Detection)</li> <li>- Electronics: DAE4 - SN720; Calibrated: 1/18/2010</li> <li>- Phantom: SAM 1560; Type: SAM; Serial: 1560</li> <li>- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186</li> </ul> <p>Touch position-Middle RC3 S055/Zoom Scan (7x7x7)/Cube 0: Measurement grid:<br/> dx=5mm, dy=5mm, dz=5mm<br/> Reference Value = 29.9 V/m; Power Drift = 0.076 dB<br/> Peak SAR (extrapolated) = 1.81 W/kg<br/> SAR(1 g) = 1.31 mW/g; SAR(10 g) = 0.926 mW/g</p> <p>Info: Interpolated medium parameters used for SAR evaluation.<br/> Maximum value of SAR (measured) = 1.40 mW/g</p> <div>  <p>0 dB = 1.40mW/g</p> </div> |       |           |

**Fig11 SAR Test result**

| Left Side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Cheek | 848.31 MHz |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------------|
| <p>Communication System: cdma 835; Frequency: 848.3 MHz;Duty Cycle: 1:1<br/> Medium parameters used (interpolated): <math>f = 848.3 \text{ MHz}</math>; <math>\sigma = 0.986 \text{ mho/m}</math>; <math>\epsilon_r = 40.3</math>;<br/> <math>\rho = 1000 \text{ kg/m}^3</math><br/> Phantom section: Left Section</p> <p>DASY4 Configuration:</p> <ul style="list-style-type: none"> <li>- Probe: ES3DV3 - SN3128; ConvF(7.88, 8.3, 8.05); Calibrated: 6/22/2010</li> <li>- Sensor-Surface: 4mm (Mechanical Surface Detection)</li> <li>- Electronics: DAE4 - SN720; Calibrated: 1/18/2010</li> <li>- Phantom: SAM 1560; Type: SAM; Serial: 1560</li> <li>- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186</li> </ul> <p>Touch position-high RC3 S055/Zoom Scan (7x7x7)/Cube 0: Measurement grid:<br/> <math>dx=5\text{mm}</math>, <math>dy=5\text{mm}</math>, <math>dz=5\text{mm}</math><br/> Reference Value = 24.5 V/m; Power Drift = 0.168 dB<br/> Peak SAR (extrapolated) = 1.47 W/kg<br/> SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.731 mW/g</p> <p>Info: Interpolated medium parameters used for SAR evaluation.<br/> Maximum value of SAR (measured) = 1.13 mW/g</p> <div>  <p>0 dB = 1.13mW/g</p> </div> |       |            |

**Fig12 SAR Test result**

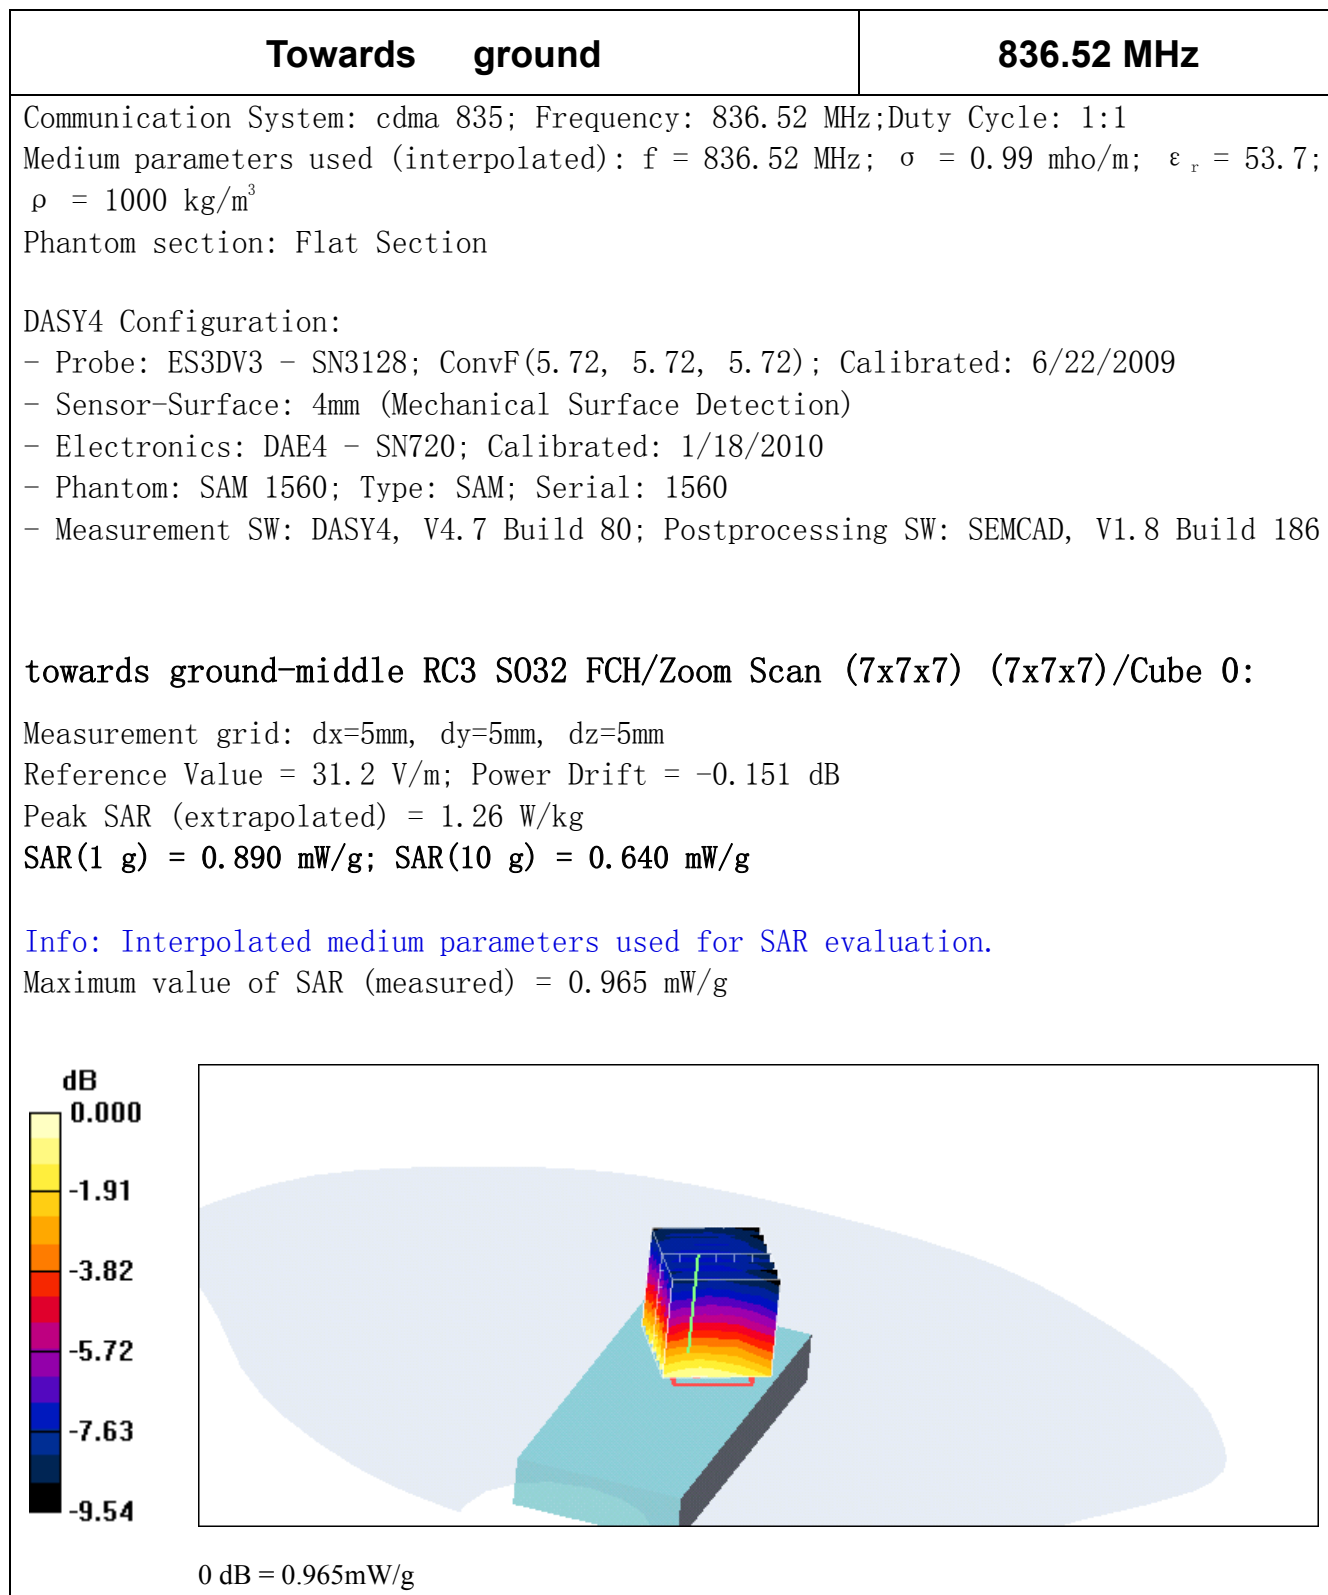
| Left Side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Tilt | 836.52 MHz |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------------|
| <p>Communication System: cdma 835; Frequency: 836.52 MHz;Duty Cycle: 1:1<br/>Medium parameters used (interpolated): <math>f = 836.52 \text{ MHz}</math>; <math>\sigma = 0.978 \text{ mho/m}</math>; <math>\epsilon_r = 39.4</math>;<br/><math>\rho = 1000 \text{ kg/m}^3</math><br/>Phantom section: Left Section</p> <p>DASY4 Configuration:</p> <ul style="list-style-type: none"> <li>- Probe: ES3DV3 - SN3128; ConvF(7.88, 8.3, 8.05); Calibrated: 6/22/2010</li> <li>- Sensor-Surface: 4mm (Mechanical Surface Detection)</li> <li>- Electronics: DAE4 - SN720; Calibrated: 1/18/2010</li> <li>- Phantom: SAM 1560; Type: SAM; Serial: 1560</li> <li>- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186</li> </ul> <p>Tilt position-middle RC3 S055/Zoom Scan (7x7x7)/Cube 0: Measurement grid:<br/>dx=5mm, dy=5mm, dz=5mm<br/>Reference Value = 26.7 V/m; Power Drift = -0.081 dB<br/>Peak SAR (extrapolated) = 1.02 W/kg<br/>SAR(1 g) = 0.766 mW/g; SAR(10 g) = 0.550 mW/g</p> <p>Info: Interpolated medium parameters used for SAR evaluation.<br/>Maximum value of SAR (measured) = 0.823 mW/g</p> <div>  <p>0 dB = 0.823mW/g</p> </div> |      |            |

**Fig13 SAR Test result**

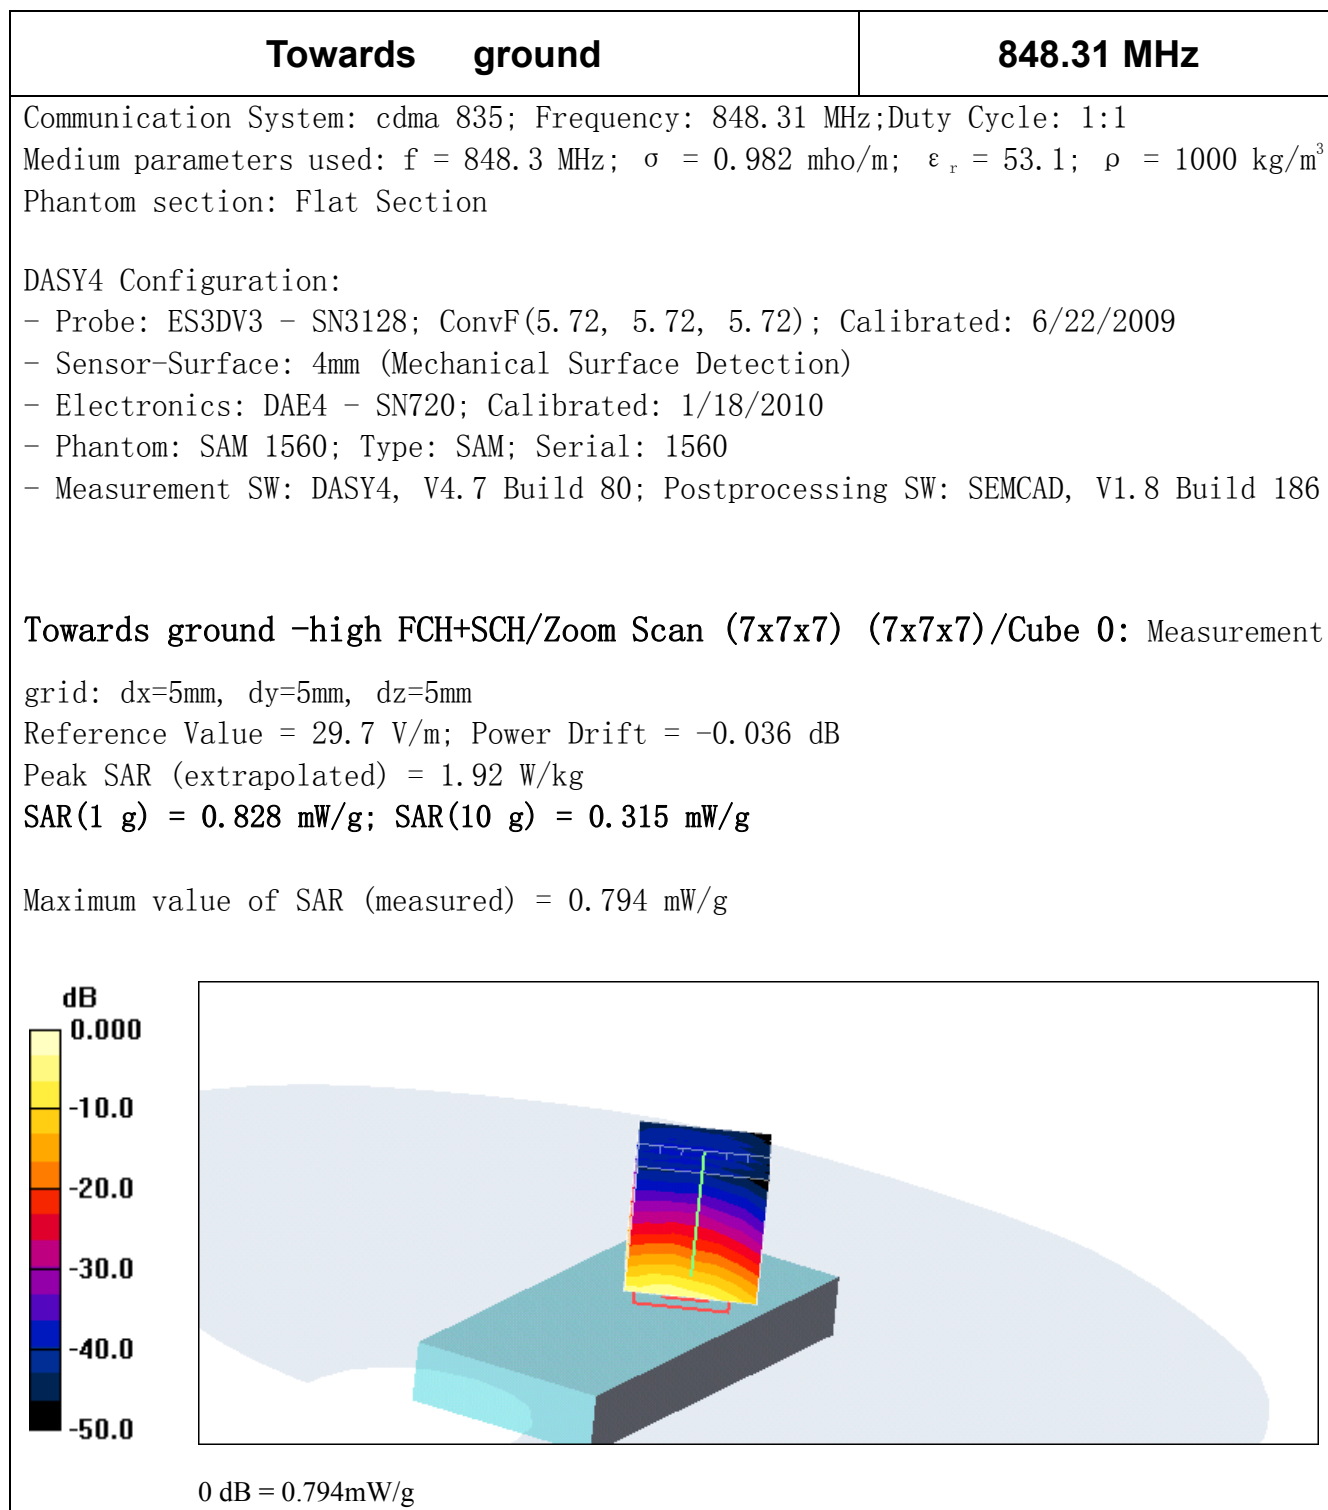
## 835MHz/ Body

| Towards ground                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 824.7 MHz |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| <p>Communication System: cdma 835; Frequency: 824.7 MHz;Duty Cycle: 1:1<br/> Medium parameters used: <math>f = 825 \text{ MHz}</math>; <math>\sigma = 0.968 \text{ mho/m}</math>; <math>\epsilon_r = 53.1</math>; <math>\rho = 1000 \text{ kg/m}^3</math><br/> Phantom section: Flat Section</p> <p>DASY4 Configuration:</p> <ul style="list-style-type: none"> <li>- Probe: ES3DV3 - SN3128; ConvF(5.72, 5.72, 5.72); Calibrated: 6/22/2009</li> <li>- Sensor-Surface: 4mm (Mechanical Surface Detection)</li> <li>- Electronics: DAE4 - SN720; Calibrated: 1/18/2010</li> <li>- Phantom: SAM 1560; Type: SAM; Serial: 1560</li> <li>- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186</li> </ul> <p>Towards ground - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:</p> <p><math>dx=5\text{mm}</math>, <math>dy=5\text{mm}</math>, <math>dz=5\text{mm}</math><br/> Reference Value = 29.9 V/m; Power Drift = -0.206 dB<br/> Peak SAR (extrapolated) = 1.15 W/kg<br/> SAR(1 g) = 0.790 mW/g; SAR(10 g) = 0.562 mW/g</p> <p>Maximum value of SAR (measured) = 0.861 mW/g</p> <div data-bbox="140 1339 1444 1803"> </div> <p>0 dB = 0.861mW/g</p> |           |

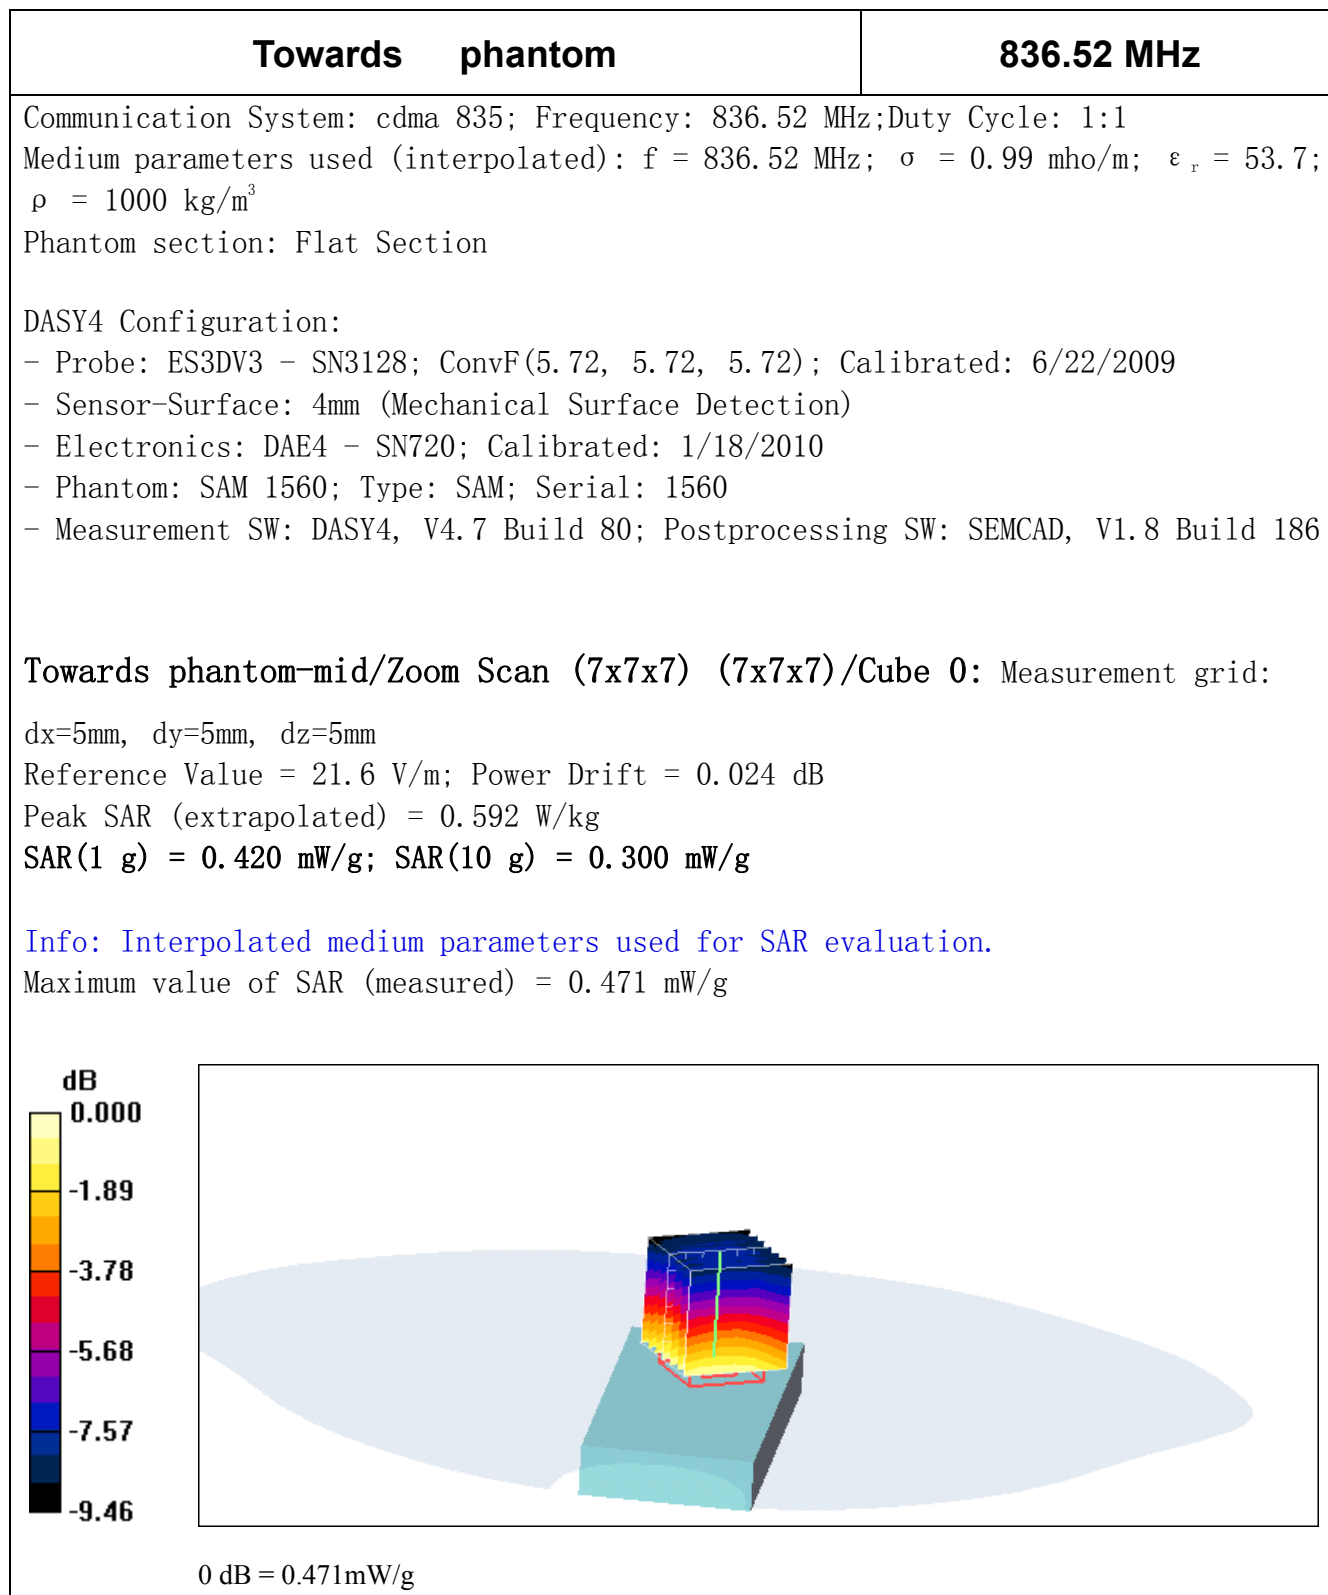
**Fig14 SAR Test result**



**Fig15 SAR Test result**



**Fig16 SAR Test result**



**Fig17 SAR Test result**

## 7.7 Pictures of the device under test

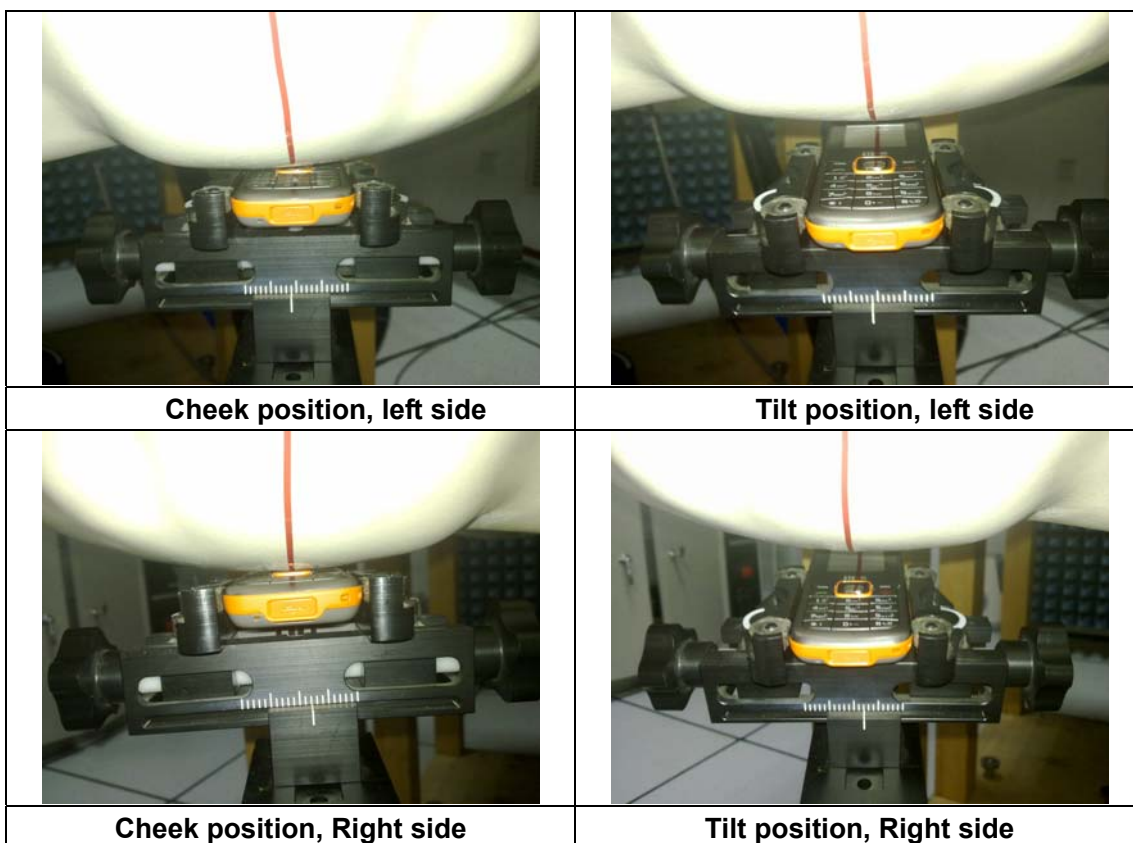


Front view of the device



back view of the device

## 7.8 Test Positions for the Device under test





**Body position with a headset**

## 7.9 Picture to demonstrate the required liquid depth

the liquid depth in the used SAM phantoms



**Liquid depth for SAR Measurement**

## 7.10 Simplified Performance Checking

The simplified performance check was realized using the dipole validation kits. The input power of the dipole antennas were 250mW (cw signal) and they were placed under the flat part of the SAM phantom. The results are listed in the Table 8 .The target values were adopted from the IEEE1528. Table 7 includes the uncertainty assessment for the system performance checking which was suggested by the IEC 62209-1-2005 and determined by Schmid & Partner Engineering AG. The expanded uncertainty is assessed to be  $\pm 21.9\%$ . Measurement is made at temperature  $24^{\circ}\text{C}$ , relative humidity 34.5%, Liquid temperature during the test:  $22.3^{\circ}\text{C}$ . System validation date: 2010.10.25


|        |                | <b>SAR<sub>1g</sub></b><br><b>[w/kg]</b> | <b><math>\epsilon_r</math></b> | <b><math>\sigma</math>[S/m]</b> | <b>Temperature</b> |                   |
|--------|----------------|------------------------------------------|--------------------------------|---------------------------------|--------------------|-------------------|
|        |                |                                          |                                |                                 | <b>Ambient[°C]</b> | <b>Liquid[°C]</b> |
| 900MHz | Target Value   | 10.8                                     | 42±2.1                         | 0.99±0.05                       | 15-30              | ---               |
|        | Measured Value | 10.9                                     | 40.7                           | 0.95                            | 24.0               | 22.3              |

All SAR values are normalized to 1W forward power

**Table8: Validation results, 900 MHz**

The State Radio\_monitoring\_center Testing Center

Calibration Certificate



|                   |                                                  |
|-------------------|--------------------------------------------------|
| Instrument        | Dosimetric E-field Probe                         |
| Type/Model        | ES3DV3                                           |
| Manufacturer      | Schmid & Partner Engineering AG                  |
| Serial No         | SN:3128                                          |
| Name of Client    | The State Radio_monitoring_center Testing Center |
| Address of Client | No.98 Bei Lishi Road XiCheng District            |
| Calibration Date  | 2010.6.22                                        |

All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3) °C and humidity<70%

Approved by



Tel: +86-10-68009202 68009203 Fax: +86-10-68009205 68009195  
Add: No.80 Bei Lishi Road, Xi Cheng District Beijing 100037, P.R.China

Page 1 of 6

Certificate No.SRTC2010-CAL002-004

### The State Radio\_monitoring\_center Testing Center

Reference documents of the measurement(Code, Name)

SRTC3003-V1.0.0 Working procedure for calibration——SAR testing system

Place and environmental condition of the measurement

Temperature 22.1℃ Humidity 24.8%  
Location SRTC226 room

| Primary Calibration Equipment used   | Model/Type | ID#            | Cal Date | Scheduled Calibration |
|--------------------------------------|------------|----------------|----------|-----------------------|
| Power meter                          | E4417A     | SN: MY45101004 | 2009.8   | 2010.8                |
| Power sensor                         | E9300B     | SN: MY41496001 | 2009.8   | 2010.8                |
| Power sensor                         | E9300B     | SN: MY41496003 | 2009.8   | 2010.8                |
| Reference DAE                        | DAE4       | SN: 720        | 2010.1   | 2011.1                |
| Signal generator                     | SML03      | SN:103514      | 2009.8   | 2010.8                |
| Network analyzer                     | 8714ET     | SN:US40372083  | 2009.8   | 2010.8                |
| Secondary Calibration Equipment used | Model/Type | ID#            |          |                       |
| Waveguide                            | WGLS R9    | SN:1006        |          |                       |
| Waveguide                            | WGLS R14   | SN:1003        |          |                       |
| Waveguide                            | WGLS R22   | SN:1006        |          |                       |

Tel: +86-10-68009202 68009203 Fax: +86-10-68009205 68009195  
Add: No.80 Bei Lishi Road, Xi Cheng District Beijing 100037, P.R.China

Page 2 of 6 Certificate No.SRTC2010-CAL002-004

---

**The State Radio\_monitoring\_center Testing Center**

---

**Note:**

1. This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.
2. This calibration certificate is not permitted to be reproduced except in full without written the approval of the only laboratory
3. SRTC is responsible for the whole of certificate only with stamp of SRTC.
4. The calibration results would be valid only for the items calibration.
5. The certification is written by Chinese and English. Exact meaning should be explained only on Chinese version.

---

Tel: +86-10-68009202 68009203 Fax: +86-10-68009205 68009195  
Add: No.80 Bei Lishi Road, Xi Cheng District Beijing 100037, P.R.China

Page 3 of 6 Certificate No.SRTC2010-CAL002-004

## The State Radio\_monitoring\_center Testing Center

### Glossary

|                         |                                                                                                                                    |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| TSL                     | Tissue Simulating Liquid                                                                                                           |
| NORM <sub>x, y, z</sub> | The sensitivity in free space                                                                                                      |
| ConvF                   | The sensitivity of the TSL/The sensitivity in free space                                                                           |
| DCP                     | Diode Compression Point                                                                                                            |
| Angle $\phi$            | $\phi$ rotation around probe axis                                                                                                  |
| Angle $\theta$          | $\theta$ rotation around an axis that is in the plane normal to probe axis<br>i.e. $\theta=0$ , means that is normal to probe axis |

### Calibration is performed according to the Following Standards

IEEE Std 1528-2003

IEC 62209-1-2005

Federal Communication Commission Office of Engineering & Technology (FCC OET)

### Methods Applied and Interpretation of Parameters

- NORM<sub>x, y, z</sub>: Assessed for E-field polarization  $\theta=0$  for XY sensors and  $\theta=90$  for Z sensor
- NORM(f)<sub>x, y, z</sub>= NORM<sub>x, y, z</sub> \* frequency\_response. And this linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the states uncertainty of ConvF.
- DCP<sub>x,y,z</sub>: DCP are numerical linearization parameters assessed based on the data of power sweep(no uncertainty required). DCP does not depend on frequency and medium.
- ConvF and boundary effect: Assessed in flat phantom using E-field and inside waveguide using analytical field distributions based on power measurements for  $f > 800\text{MHz}$ . The same setups are used for assessment of the parameters applied for boundary compensation(alpha,depth)of which typical uncertainty values are given. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50\text{MHz}$  to  $\pm 100\text{MHz}$ .
- Spherical isotropy: in a locally homogeneous field realized using an open waveguide setup.

Tel: +86-10-68009202 68009203 Fax: +86-10-68009205 68009195  
Add: No.80 Bei Lishi Road, Xi Cheng District Beijing 100037, P.R.China

Page 4 of 6 Certificate No.SRTC2010-CAL002-004

## The State Radio\_monitoring\_center Testing Center

### Measurement Conditions

|               |              |                |
|---------------|--------------|----------------|
| DASY versions | DSAY 5       | V5.0 Build 126 |
| Model         | Flat phantom | —              |

### Probe Sensitivity Parameters

|        | Value | Unit            |
|--------|-------|-----------------|
| Axis X | 1.00  | $\mu V/(V/m)^2$ |
| Axis Y | 1.00  | $\mu V/(V/m)^2$ |
| Axis Z | 1.00  | $\mu V/(V/m)^2$ |

### 1. Diode Compression Point

|        | Value | Unit | Uncertainty (k=2) |
|--------|-------|------|-------------------|
| Axis X | 97.4  | mV   | 10.82%            |
| Axis Y | 101.4 | mV   | 10.82%            |
| Axis Z | 100.7 | mV   | 10.82%            |

### 2. Probe Conversion Factors: Head Tissue Liquid

| Frequency<br>(MHz) | Validity<br>(MHz) | Permittivity | Conductivity<br>(mho/m) | Alpha | Depth<br>(mm) | ConvFx/ ConvFy / ConvFz<br>$\mu V/(V/m)^2$ |       |       | Uncertainty<br>(k = 2) |
|--------------------|-------------------|--------------|-------------------------|-------|---------------|--------------------------------------------|-------|-------|------------------------|
| 835                | ±100              | 41.93        | 0.916                   | 0.448 | 1.499         | 7.880                                      | 8.301 | 8.050 | 13.02%                 |
| 900                | ±100              | 42.72        | 0.968                   | 0.607 | 1.271         | 9.029                                      | 9.525 | 9.201 | 13.02%                 |
| 1800               | ±100              | 39.61        | 1.354                   | 0.312 | 2.126         | 6.154                                      | 6.495 | 6.273 | 13.02%                 |
| 1900               | ±100              | 39.11        | 1.463                   | 0.381 | 1.832         | 4.947                                      | 5.220 | 5.055 | 13.02%                 |

Tel: +86-10-68009202 68009203 Fax: +86-10-68009205 68009195  
Add: No.80 Bei Lishi Road, Xi Cheng District Beijing 100037, P.R. China

Page 5 of 6 Certificate No.SRTC2010-CAL002-004

### The State Radio\_monitoring\_center Testing Center

#### 3. Probe Conversion Factors: Body Tissue Liquid

| Frequency<br>(MHz) | Validity<br>(MHz) | Permittivity | Conductivity<br>(mho/m) | Alpha | Depth<br>(mm) | ConvFx/ ConvFy/ConvFz<br>$\mu V/(V/m)^2$ |       |       | Uncertainty<br>(k = 2) |
|--------------------|-------------------|--------------|-------------------------|-------|---------------|------------------------------------------|-------|-------|------------------------|
| 835                | ±100              | 54.05        | 0.983                   | 0.508 | 1.412         | 6.776                                    | 7.019 | 6.804 | 13.02%                 |
| 900                | ±100              | 54.48        | 1.055                   | 0.672 | 1.244         | 8.755                                    | 9.243 | 8.919 | 13.02%                 |
| 1800               | ±100              | 53.74        | 1.567                   | 0.316 | 2.446         | 5.702                                    | 6.018 | 5.816 | 13.02%                 |
| 1900               | ±100              | 54.42        | 1.465                   | 0.330 | 2.414         | 4.532                                    | 4.785 | 4.632 | 13.02%                 |

#### 4. Probe Isotropy

|                    | Value  | Unit | Uncertainty(k=2) |
|--------------------|--------|------|------------------|
| Axial Isotropy     | -0.071 | dB   | 10.18%           |
| Spherical Isotropy | -0.171 | dB   | 10.18%           |

Calibrated by 张明远

Checked by 王 强

Tel: +86-10-68009202 68009203 Fax: +86-10-68009205 68009195  
Add: No.80 Bei Lishi Road, Xi Cheng District Beijing 100037, P.R.China

Page 6 of 6 Certificate No.SRTC2010-CAL002-004

The State Radio\_monitoring\_center Testing Center

Calibration Certificate



Instrument DAE

Type/Model DAE4

Manufacturer Schmid & Partner Engineering AG

Serial No SN:720

Name of Client The State Radio\_monitoring\_center Testing Center

Address of Client No.98 Bei Lishi Road XiCheng District

Calibration Date 2010.1.18

All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3) °C and humidity<70%

Approved by



Tel: +86-10-68009202 68009203 Fax: +86-10-68009205 68009195  
Add: No.80 Bei Lishi Road, Xi Cheng District Beijing 100037, P.R.China

Page 1 of 7 Certificate No.SRTC2010-CAL001-E001

## The State Radio\_monitoring\_center Testing Center

Reference documents of the measurement(Code, Name)

SRTC3003-V1.0.0 Working procedure for calibration——SAR testing system

Place and environmental condition of the measurement

Temperature 22.1℃

Humidity 24.8%

Location SRTC226 room

| Primary Calibration Equipment used   | Model/Type | ID#     | Cal Date | Scheduled Calibration |
|--------------------------------------|------------|---------|----------|-----------------------|
| Process Calibrator<br>Protractor     | Fluke 525B | 1090118 | 2009.10  | 2010.10               |
|                                      |            | 1001    | 2009.10  | 2010.10               |
| Secondary Calibration Equipment used | Model/Type | ID#     | Cal Date | Scheduled Calibration |
| Calibrator Box                       | V1.1       | 1003    | 2009.6   | 2010.6                |

Tel: +86-10-68009202 68009203 Fax: +86-10-68009205 68009195  
Add: No.80 Bei Lishi Road, Xi Cheng District Beijing 100037, P.R.China

Page 2 of 7 Certificate No.SRTC2010-CAL001-E001

---

**The State Radio\_monitoring\_center Testing Center**

---

**Note:**

1. This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.
2. This calibration certificate is not permitted to be reproduced except in full without written the approval of the only laboratory
3. SRTC is responsible for the whole of certificate only with stamp of SRTC.
4. The calibration results would be valid only for the items calibration.
5. The certification is written by Chinese and English. Exact meaning should be explained only on Chinese version.

---

Tel: +86-10-68009202 68009203 Fax: +86-10-68009205 68009195  
Add: No.80 Bei Lishi Road, Xi Cheng District Beijing 100037, P.R.China

Page 3 of 7 Certificate No.SRTC2010-CAL001-E001

## The State Radio\_monitoring\_center Testing Center

### Glossary

|                 |                                                                                        |
|-----------------|----------------------------------------------------------------------------------------|
| DAE             | data acquisition electronics                                                           |
| Connector angle | information used in DASY system to align probe sensor X to the robot coordinate system |

### Calibration is preformed according to the Following Standards

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in Human Head from Wireless Communication Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005
- Federal Communication Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Methods Applied and Interpretation of Parameters

- DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrates instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters contain technical information as a result from the performance test and require no uncertainty.

Tel: +86-10-68009202 68009203 Fax: +86-10-68009205 68009195  
Add: No.80 Bei Lishi Road, Xi Cheng District Beijing 100037, P.R .China

Page 4 of 7 Certificate No.SRTC2010-CAL001-E001

## The State Radio\_monitoring\_center Testing Center

**DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage.

**Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.

**Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.

**AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage.

**Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurement.

### DC Voltage Measurement

A/D-Converter Resolution nominal

High Range: 1LSB=6.1  $\mu$  V

full range = -100...+300mV

Low Range: 1LSB=61nV

full range = -1...+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Facto | X                        | Y                        | Z                        |
|-------------------|--------------------------|--------------------------|--------------------------|
| High Range        | 403.404 $\pm$ 0.12%(k=2) | 404.863 $\pm$ 0.12%(k=2) | 403.270 $\pm$ 0.12%(k=2) |
| Low Range         | 3.949 $\pm$ 1.3%(k=2)    | 3.965 $\pm$ 1.3%(k=2)    | 3.952 $\pm$ 1.3%(k=2)    |

### Connector Angle

|                                           |               |
|-------------------------------------------|---------------|
| Connector Angle to be used in DASY system | 174' $\pm$ 1' |
|-------------------------------------------|---------------|

Tel: +86-10-68009202 68009203 Fax: +86-10-68009205 68009195  
Add: No.80 Bei Lishi Road, Xi Cheng District Beijing 100037, P.R.China

Page 5 of 7 Certificate No.SRTC2010-CAL001-E001

## The State Radio\_monitoring\_center Testing Center

### 1. DC Voltage Linearity

#### DC Voltage Linearity

| High Range       | Input ( $\mu$ V ) | Reading( $\mu$ V ) | Error(%) |
|------------------|-------------------|--------------------|----------|
| Channel X +Input | +200000           | 199996.0           | 0.00     |
| Channel X +Input | +20000            | 20009.3            | 0.05     |
| Channel X -Input | -20000            | -19998.2           | 0.01     |
| Channel Y +Input | +200000           | 199998.4           | 0.00     |
| Channel Y +Input | +20000            | 20009.0            | 0.04     |
| Channel Y -Input | -20000            | -19995.5           | 0.02     |
| Channel Z +Input | +200000           | 199996.6           | 0.02     |
| Channel Z +Input | +20000            | 20006.7            | 0.03     |
| Channel Z -Input | -20000            | -20001.6           | 0.01     |

| Low Range        | Input ( $\mu$ V ) | Reading( $\mu$ V ) | Error(%) |
|------------------|-------------------|--------------------|----------|
| Channel X +Input | +2000             | 1999.8             | 0.01     |
| Channel X +Input | +200              | 202.7              | 1.35     |
| Channel X -Input | -200              | -201.3             | 0.65     |
| Channel Y +Input | +2000             | 2000.0             | 0.00     |
| Channel Y +Input | +200              | 201.1              | 0.55     |
| Channel Y -Input | -200              | -202.4             | 1.20     |
| Channel Z +Input | +2000             | 2001.1             | 0.06     |
| Channel Z +Input | +200              | 202.5              | 1.25     |
| Channel Z -Input | -200              | -202.4             | 1.20     |

### 2 .Common mode sensitivity

#### Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3sec

|           | Common mode Input Voltage(mV) | High Range Average Reading( $\mu$ V ) | Low Range Average Reading( $\mu$ V ) |
|-----------|-------------------------------|---------------------------------------|--------------------------------------|
| Channel X | 200                           | -5.7                                  | -7.1                                 |
|           | -200                          | 9.3                                   | 8.0                                  |
| Channel Y | 200                           | 16.1                                  | 15.4                                 |
|           | -200                          | -16.3                                 | -16.0                                |
| Channel Z | 200                           | -18.1                                 | -17.3                                |
|           | -200                          | 15.7                                  | 15.8                                 |

Tel: +86-10-68009202 68009203 Fax: +86-10-68009205 68009195  
Add: No.80 Bei Lishi Road, Xi Cheng District Beijing 100037, P.R .China

Page 6 of 7 Certificate No.SRTC2010-CAL001-E001

## The State Radio\_monitoring\_center Testing Center

### 3.Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3sec

|           | Input Voltage(mV) | Channel X( $\mu$ V) | Channel Y( $\mu$ V) | Channel Z( $\mu$ V) |
|-----------|-------------------|---------------------|---------------------|---------------------|
| Channel X | 200               | —                   | 9.5                 | 4.0                 |
| Channel Y | 200               | 7.9                 | —                   | 9.2                 |
| Channel Z | 200               | 6.3                 | 7.3                 | —                   |

### 4.AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3sec

|           | High Range(LSB) | Low Range (LSB) |
|-----------|-----------------|-----------------|
| Channel X | 16149.5         | 16906.9         |
| Channel Y | 16212.3         | 17747.1         |
| Channel Z | 16458.2         | 15358.1         |

### 5.Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3sec  
Input 10M  $\Omega$

|           | Average( $\mu$ V) | Min. Offset( $\mu$ V) | Max. Offset( $\mu$ V) | Std.Deviation( $\mu$ V) |
|-----------|-------------------|-----------------------|-----------------------|-------------------------|
| Channel X | 0.2               | 1.7                   | -1.9                  | 0.6                     |
| Channel Y | -0.5              | 0.5                   | -1.6                  | 0.4                     |
| Channel Z | -0.7              | 1.6                   | -2.5                  | 0.7                     |

Calibrated by 张明远

Checked by 21 11/16

Tel: +86-10-68009202 68009203 Fax: +86-10-68009205 68009195  
Add: No.80 Bei Lishi Road, Xi Cheng District Beijing 100037, P.R.China

Page 7 of 7 Certificate No.SRTC2010-CAL001-E001

The State Radio\_monitoring\_center Testing Center

Calibration Certificate



Instrument \_\_\_\_\_  
Dipole

Type/Model \_\_\_\_\_  
D900V2

Manufacturer \_\_\_\_\_  
Schmid & Partner Engineering AG

Serial No \_\_\_\_\_  
SN:171

Name of Client \_\_\_\_\_  
The State Radio\_monitoring\_center Testing Center

Address of Client \_\_\_\_\_  
No.98 Bei Lishi Road XiCheng District

Calibration Date \_\_\_\_\_  
2010.6.11

All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3) °C and humidity<70%

Approved by

李剑雄



Tel: +86-10-68009202 68009203 Fax: +86-10-68009205 68009195  
Add: No.80 Bei Lishi Road, Xi Cheng District Beijing 100037, P.R.China

Page 1 of 8 Certificate No.SRTC2010-CAL003-003

### The State Radio\_monitoring\_center Testing Center

|                                                                         |                |
|-------------------------------------------------------------------------|----------------|
| Reference documents of the measurement(Code, Name)                      |                |
| SRTC3003-V1.0.0 Working procedure for calibration of SAR Testing system |                |
| Place and environmental condition of the measurement                    |                |
| Temperature 21.6℃                                                       | Humidity 30.7% |
| Location SRTC Room226                                                   |                |

| Primary Calibration Equipment used   | Model/Type | ID#            | Cal Date | Scheduled Calibration |
|--------------------------------------|------------|----------------|----------|-----------------------|
| Power meter                          | E4417A     | SN: MY45101004 | 2009.8   | 2010.8                |
| Power sensor                         | E9300B     | SN: MY41496001 | 2009.8   | 2010.8                |
| Power sensor                         | E9300B     | SN: MY41496003 | 2009.8   | 2010.8                |
| Reference DAE                        | DAE4       | SN: 720        | 2010.1   | 2011.1                |
| Reference probe                      | ES3DV3     | SN: 3128       | 2009.6   | 2010.6                |
| Secondary Calibration Equipment used | Model/Type | ID#            | Cal Date | Scheduled Calibration |
| Signal generator                     | SML03      | SN:103514      | 2009.8   | 2010.8                |
| Network analyzer                     | 8714ET     | SN:US40372083  | 2009.8   | 2010.8                |

Tel: +86-10-68009202 68009203 Fax: +86-10-68009205 68009195  
Add: No.80 Bei Lishi Road, Xi Cheng District Beijing 100037, P.R.China

Page 2 of 8 Certificate No.SRTC2010-CAL003-003

---

## The State Radio\_monitoring\_center Testing Center

---

**Note:**

1. This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.
2. This calibration certificate is not permitted to be reproduced except in full without written the approval of the only laboratory
3. SRTC is responsible for the whole of certificate only with stamp of SRTC.
4. The calibration results would be valid only for the items calibration.
5. The certification is written by Chinese and English. Exact meaning should be explained only on Chinese version.

---

Tel: +86-10-68009202 68009203 Fax: +86-10-68009205 68009195  
Add: No.80 Bei Lishi Road, Xi Cheng District Beijing 100037, P.R. China

Page 3 of 8 Certificate No.SRTC2010-CAL003-003

---

## The State Radio\_monitoring\_center Testing Center

---

### Glossary

|       |                                                              |
|-------|--------------------------------------------------------------|
| TSL   | Tissue Simulating Liquid                                     |
| ConvF | The sensitivity of the TSL / sensitivity in TSL/NORM x, y, z |
| N/A   | not applicable or not measured                               |

### Calibration is preformed according to the Following Standards

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in Human Head from Wireless Communication Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz) ", February 2005
- c) Federal Communication Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- e) DASY System Handbook

---

Tel: +86-10-68009202 68009203 Fax: +86-10-68009205 68009195  
Add: No.80 Bei Lishi Road, Xi Cheng District Beijing 100037, P.R.China

Page 4 of 8 Certificate No.SRTC2010-CAL003-003

## The State Radio\_monitoring\_center Testing Center

### Methods Applied and Interpretation of Parameters

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- SAR measured: SAR measured at the stated antenna input power
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

### Measurement Conditions

|                            |                        |                           |
|----------------------------|------------------------|---------------------------|
| DASY Version               | DSAY 5                 | V5.0 Build 126            |
| Extrapolation              | Advanced Extrapolation | ——                        |
| Phantom                    | ELI4                   | ——                        |
| Distance Dipole Center-TSL | 15mm                   | With spacer<br>(See note) |
| Area Scan Resolution       | dx,dy=15mm             | ——                        |
| Zoom Scan Resolution       | dx,dy,dz=5mm           | ——                        |
| Frequency                  | 900MHz                 | ——                        |

Note: As client can not provide a spacer for their dipole, we used a alternate method to define the distance from dipole center to TSL. Pictures in Annex 3 show the details.

## The State Radio\_monitoring\_center Testing Center

### Head TSL Parameters

The following parameters and calculation were applied

|                                  | Temperature  | Permittivity | Conductivity |
|----------------------------------|--------------|--------------|--------------|
| Nominal Head TSL parameters      | 22.0°C       | 41.5         | 0.97mho/m    |
| Measured Head TSL parameters     | (22±0.5)°C   | 41.2         | 0.95m±5%     |
| Head TSL temperature during test | (21.6±0.6)°C | —            | —            |

### 1. SAR-Head TSL

|                                                                |                   |                        |
|----------------------------------------------------------------|-------------------|------------------------|
| SAR -1g<br>SAR averaged over 1cm <sup>3</sup> (1g) of Head TSL | Condition         | —                      |
| SAR measured                                                   | 250mW input power | 2.70mW/g               |
| SAR normalized                                                 | normalized to 1W  | 10.80mW/g              |
| SAR for nominal Head TSL parameters                            | normalized to 1W  | 10.71 mW/g±15.20%(k=2) |

|                                                                  |                   |                      |
|------------------------------------------------------------------|-------------------|----------------------|
| SAR-10g<br>SAR averaged over 10cm <sup>3</sup> (10g) of Head TSL | Condition         | —                    |
| SAR measured                                                     | 250mW input power | 1.72mW/g             |
| SAR normalized                                                   | normalized to 1W  | 6.88mW/g             |
| SAR for nominal Head TSL parameters                              | normalized to 1W  | 6.80mW/g±14.38%(k=2) |

Tel: +86-10-68009202 68009203 Fax: +86-10-68009205 68009195  
Add: No.80 Bei Lishi Road, Xi Cheng District Beijing 100037, P.R.China

Page 6 of 8 Certificate No.SRTC2010-CAL003-003

## The State Radio\_monitoring\_center Testing Center

### 2. Annex

#### Annex 1

Date/Time: 6/11/2010 8:30:47 AM

Test Laboratory: SRTC, Beijing, China

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:171

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 900$  MHz;  $\sigma = 0.949$  mho/m;  $\epsilon_r = 41.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY4 Configuration:

- Probe: ES3DV3 - SN3128; ConvF(5.52, 5.52, 5.52); Calibrated: 6/22/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn720; Calibrated: 1/18/2010
- Phantom: ELI 4.0; Type: QDOVA001BA
- Measurement SW: DASY5, V5.0 Build 126; SEMCAD X Version 13.4 Build 125

Pin=250mW;d=15mm /Zoom Scan (7x7x7) (7x7x7)/Cube 0:

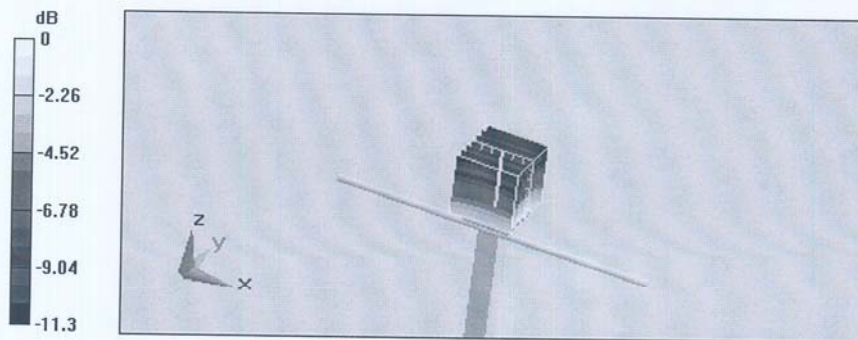
Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.3 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 4.18 W/kg

SAR(1 g) = 2.7 mW/g; SAR(10 g) = 1.72 mW/g

Maximum value of SAR (measured) = 2.93 mW/g



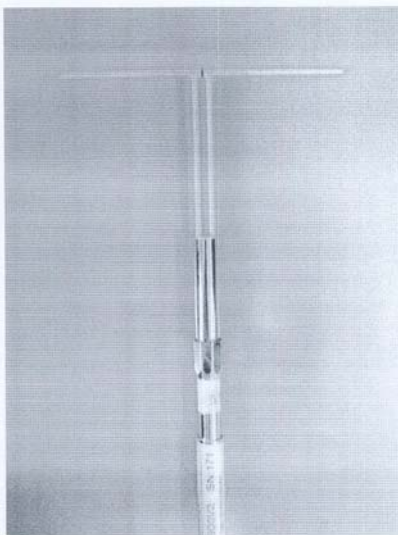
0 dB = 2.93mW/g

Tel: +86-10-68009202 68009203 Fax: +86-10-68009205 68009195  
Add: No.80 Bei Lishi Road, Xi Cheng District Beijing 100037, P.R.China

Page 7 of 8 Certificate No.SRTC2010-CAL003-003

The State Radio\_monitoring\_center Testing Center

Annex 2



Calibrated by 张明远

Checked by 刘 彬

Tel: +86-10-68009202 68009203 Fax: +86-10-68009205 68009195  
Add: No.80 Bei Lishi Road, Xi Cheng District Beijing 100037, P.R.China

Page 8 of 8 Certificate No.SRTC2010-CAL003-003

## 7.11 Certificate of conformity

Schmid & Partner Engineering AG

**s p e a g**

Zeughausstrasse 43, 8004 Zurich, Switzerland  
Phone +41 1 245 9700, Fax +41 1 245 9779  
info@speag.com, http://www.speag.com

### Certificate of conformity / First Article Inspection

|                       |                                                                          |
|-----------------------|--------------------------------------------------------------------------|
| Item                  | SAM Twin Phantom V4.0                                                    |
| Type No               | QD 000 P40 C                                                             |
| Series No             | TP-1150 and higher                                                       |
| Manufacturer / Origin | Untersee Composites<br>Hauptstr. 69<br>CH-8559 Fruthwilen<br>Switzerland |

#### Tests

The series production process used allows the limitation to test of first articles.  
Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

| Test                 | Requirement                                                                                                                                  | Details                                                              | Units tested                       |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|------------------------------------|
| Shape                | Compliance with the geometry according to the CAD model.                                                                                     | IT'IS CAD File (*)                                                   | First article, Samples             |
| Material thickness   | Compliant with the requirements according to the standards                                                                                   | 2mm +/- 0.2mm in specific areas;<br>6mm +/- 0.2mm at ERP             | First article, Samples             |
| Material parameters  | Dielectric parameters for required frequencies                                                                                               | 200 MHz – 3 GHz<br>Relative permittivity < 5<br>Loss tangent < 0.05. | Material sample<br>TP 104-5        |
| Material resistivity | The material has been tested to be compatible with the liquids defined in the standards if handled and cleaned according to the instructions | DEGMBE based simulating liquids                                      | Pre-series, First article, Samples |


#### Standards

- [1] CENELEC EN 50361
- [2] IEEE Std 1528-200x Draft CD 1.1 (Dec 02)
- [1] and [3].

#### Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date 7.8.2003

Signature / Stamp  Schmid & Partner Engineering AG   
Zeughausstrasse 43, CH-8004 Zurich  
Tel. +41 1 245 97 00, Fax +41 1 245 97 79