
CONFORMANCE TEST REPORT FOR HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

Report No. : SRMC2010-H024-E0047

Product Name: CDMA 1X Digital Mobile Phone

Product Model: ZTE-C S265

Applicant: ZTE Corporation

Manufacture: ZTE Corporation

Specification: FCC OET Bulletin 65 (Edition 97-01)

Supplement C (Edition 01-01)

FCC ID: Q78-ZTECS265

The State Radio Monitoring Center

State Radio Spectrum Monitoring and Testing Center

No.80 Beilishi Road Xicheng District Beijing, China

Tel: 86-10-68009202 Fax: 86-10-68009205

Executive Summary


The ZTE-C S265 is a CDMA 1X Digital Mobile Phone Operating in the 835MHz frequency range. The device has an internal integrated antenna .The system concepts used are the IS2000 standards.


The objective of the measurements done by SRMC (State radio monitoring center) was the dosimetric assessment of one device in the IS2000 standards. The examinations have been carried out with the dosimetric assessment system, "DASY4".


The measurements were made according to FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01) Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields .All measurements have been performed in accordance to the recommendations given by SPEAG.

The maximum SAR of the ZTE-C S265 mobile phone is

Mode	CH/f(MHz)	Power	Limit (mW/g)/1g	Measured (mW/g)	Result
SO55 RC3 full rate Lefthand, Cheek	384/836.52MHz	24.1dBm	1.6	0.80	PASS

Checked By: 

Tested By: 

This Test Report Is Issued By: 

Issued date: **2010.07.19**

Tables of Contents

1. General information	3
1.1 Notes of the test report	3
1.2 Information about the testing laboratory	3
1.3 Applicant's details	3
1.4 Manufacturer's details	3
1.5 Application details	4
1.6 Information of Test Sample	4
1.7 Auxiliary Equipment (AE)	4
1.8 Reference Specification	5
2. Subject of Investigation	6
2.1 The IEEE Standard C95.1 and the FCC Exposure Criteria	6
2.2 Distinction Between Exposed Population, Duration of Exposure and Frequencies...	7
2.3 Distinction between Maximum Permissible Exposure and SAR Limits	7
2.4 SAR Limit	8
3 The FCC Measurement Procedure	8
3.1 General Requirements	8
3.2 Phantom specifications (shell and liquid)	9
3.3 Specifications of the SAR measurement equipment	9
3.4 Scanning system specifications	10
3.5 Mobile phone holder specifications	10
4. Measurement preparation	10
4.1 General preparation	10
4.2 Simplified performance checking	10
4.3 Preparation of the mobile phone under test	11
4.4 Position of the mobile phone in relation to the phantom	11
4.5 Tests to be performed	12
5. The Measurement system	13
5.1 DASY4 Information	13
5.2 Test Equipments:	15
5.3 Uncertainty Assessment	16
6. Test Results	17
6.1 Test Environment:	17
6.2 Test Method and Procedure	17
6.3 Test Configuration	18
6.4 Test Results	18
7. Appendix	20
7.1 Administrative Data	20
7.2 Device under Test and Test Conditions	20
7.3 Tissue Recipes	22
7.4 Material Parameters	23
7.5 Setup for System Performance Check	24

7.6 Test Results	26
7.7 Pictures of the device under test.....	34
7.8 Test Positions for the Device under test.....	34
7.9 Picture to demonstrate the required liquid depth.....	35
7.10 Simplified Performance Checking	36
7.11 Certificate of conformity	60

1. General information

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio Monitoring Center.

The test results relate only to individual items of the samples which have been tested.

1.2 Information about the testing laboratory

Company: The State Radio Monitoring Center
State Radio Spectrum Monitoring and Testing Center
Address: No.80 Beilishi Road, Xicheng District, Beijing China
City: Beijing
Country or Region: China
Contacted person: Wang Junfeng
Tel: +86 10 68009181 +86 10 68009202
Fax: +86 10 68009195 +86 10 68009205
Email: wangjf@srrc.org.cn

1.3 Applicant's details

Company: ZTE Corporation
Address: 10# TangYan Road South, Hi-Tech Industrial Park, 710065
City: xi'an
Country or Region: P.R. China
Contacted person: Wang Lei
Tel: +86-029-88724011
Fax: +86-029-88723249
Email: wang.lei57@zte.com.cn

1.4 Manufacturer's details

Company: ZTE Corporation
Address: Zhongxing Bldg, Hi-Tech Park, NanShan, 518057
City: Shenzhen
Country or Region: P.R.China
Contacted person: LI De Zi
Tel: +86-021-68895196
Fax: +86-021-50801070
Email: li.dezi@zte.com.cn

1.5 Application details

Date of receipt of application: 2010.6.12

Date of receipt of test samples: 2010.6.12

Date of test: 2010.6.12

1.6 Information of Test Sample

Name of EUT	CDMA 1X Digital Mobile Phone
FCC ID	ZTE-C S265
IMEI	A100000607F99D
Frequency range	Tx:824~849MHz Rx:869~894MHz
Rated output power	23~30 dBm
Modulation type	OQPSK
Duplex mode	FDD
Duplex spacing:	45MHz
Antenna type	Fixed Internal
Rated Power Supply Voltage	3.7V

1.7 Auxiliary Equipment (AE)

AE No.	Name	Model	Manufacturer	Serial Number
AE 1	Battery	Li3710T42P3h553457	ZTE Corporation	---

1.8 Reference Specification

FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01) Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields.

IEC 62209-1-2005: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)

ANSI C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz

IEEE 1528-2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

[DAY4]

Schmid & partner Engineering AG: DAY4 Manual. Nov.2003

2. Subject of Investigation

The ZTE-C S265 is a CDMA 1X Digital Mobile Phone (Portable Device), operating in the 835MHz frequency range. The system concepts used are the IS2000 standards.



Fig 1: picture of the device under test

The objective of the measurements done by SRMC was the domestic assessment of one device in the IS2000 standards. The examinations have been carried out with the domestic assessment system “DASY4” described below.

2.1 The IEEE Standard C95.1 and the FCC Exposure Criteria

In the USA the FCC exposure criteria [OET 65] are based on the withdrawn IEEE Standard C95.1-1999 [IEEE C95.1-1999]. This version was replaced by the IEEE Standard C95.1-2005 [IEEE C95.1-2005] in October, 2005.

Both IEEE standards sets limits for human exposure to radio frequency

electromagnetic fields in the frequency range 3 kHz to 300 GHz. One of the major differences in the newly revised C95.1-2005 is the change in the basic restrictions for localized exposure, from 1.6 W/kg averaged over 1 g tissue to 2.0 W/kg averaged over 10 g tissue, which is now identical to the ICNIRP guidelines [ICNIRP 1998].

2.2 Distinction Between Exposed Population, Duration of Exposure and Frequencies

The American Standard [IEEE C95.1-1999] distinguishes between controlled and uncontrolled environment. Controlled environments are locations where there is exposure that may be incurred by persons who are aware of the potential for exposure as a concomitant of employment or by other cognizant persons. Uncontrolled environments are locations where there is the exposure of individuals who have no knowledge or control of their exposure. The exposures may occur in living quarters or workplaces. For exposure in controlled environments higher field strengths are admissible. In addition the duration of exposure is considered.

Due to the influence of frequency on important parameters, as the penetration depth of the electromagnetic fields into the human body and the absorption capability of different tissues, the limits in general vary with frequency.

2.3 Distinction between Maximum Permissible Exposure and SAR Limits

The biological relevant parameter describing the effects of electromagnetic fields in the frequency range of interest is the specific absorption rate SAR (dimension: power/mass). It is a measure of the power absorbed per unit mass. The SAR may be spatially averaged over the total mass of an exposed body or its parts. The SAR is calculated from the r.m.s. electric field strength E inside the human body, the conductivity σ and the mass density ρ of the biological tissue:

$$SAR = \frac{\sigma E^2}{\rho}$$

$$SAR = c \left. \frac{dT}{dt} \right|_t = 0$$

The specific absorption rate describes the initial rate of temperature rise dT/dt as a function of the specific heat capacity c of the tissue. A limitation of the specific absorption rate prevents an excessive heating of the human body by electromagnetic energy.

As it is sometimes difficult to determine the SAR directly by measurement (e.g. whole body averaged SAR), the standard specifies more readily measurable maximum permissible exposures in terms of external electric E and magnetic field strength H and power density S, derived from the SAR limits. The limits for E, H and the SAR limits. The limits for E, H and S have been fixed so that even under worst case conditions, the limits for the specific absorption rate SAR are not exceeded.

For the relevant frequency range the maximum permissible exposure may be exceeded if the exposure can be shown by appropriate techniques to produce SAR values below the corresponding limits.

2.4 SAR Limit

In this report the comparison between the American exposure limits and the measured data is made using the spatial peak SAR; the power level of the device under test guarantees that the whole body averaged SAR is not exceeded. Having in mind a worst case consideration, the SAR limit is valid for uncontrolled environment and mobile respectively portable transmitters. According to Table 1 the SAR values have to be averaged over a mass of 1 g (SAR1g) with the shape of a cube.

Standards	Status	SAR limit [w/kg]
IEEE C95.1-1999	Replaced	1.6

Table 1: Relevant spatial peak SAR limit averaged over a mass of 1 g.

3 The FCC Measurement Procedure

The Federal Communications Commission (FCC) has published a report and order on the 1st of August 1996 [FCC 96-326], which requires routine dosimetric assessment of mobile telecommunications devices, either by laboratory measurement techniques or by computational modeling, prior to equipment authorization or use. In 2001 the Commission's Office of Engineering and Technology has released Edition 01-01 of Supplement C to OET Bulletin 65. This revised edition, which replaces Edition 97-01, provides additional guidance and information for evaluating compliance of mobile and Portable devices with FCC limits for human exposure to radiofrequency emissions [OET 65].

3.1 General Requirements

The test shall be performed using a miniature probe that is automatically positioned to measure the internal E-field distribution in a phantom model representing the human head exposed to the EM fields produced by mobile phones. From the measured E-field values, the SAR distribution and the

maximum mass averaged SAR value shall be calculated.

The test shall be performed in a laboratory conforming to the following environmental conditions:

- the ambient temperature shall be in the range of 15 °C to 30°C and the variation shall not exceed 2 °C during the test;
- the mobile phone shall not interact with the local mobile networks;
- care shall be taken to avoid significant influence on SAR measurements by ambient EM sources;
- care shall be taken to avoid significant influence on SAR measurements by any reflection from the environment (such as floor, positioner, etc.).
- Validation of the system shall be done at least once a year according to the protocol defined in annex D of IEC 62209-1-2005 Standard.

3.2 Phantom specifications (shell and liquid)

Phantom requirements

The physical characteristics of the phantom model (size and shape) shall resemble the head and neck of a user since the shape is a dominant parameter for exposure. The phantom shall be made from material with dielectric properties similar to those of head tissues. To enable field scanning within it, the material shall be liquid contained in a head and neck shaped shell model. The shell model acts as a shaped container and shall be as unobtrusive as possible. The hand shall not be modeled.

The shell of the phantom shall be made of low loss and low permittivity material: $\tan(\delta) \leq 0,05$ and $\epsilon \leq 5$. The thickness of the phantom is defined in the CAD files and the tolerance shall be $\pm 0,2$ mm in the area defined in the CAD files (where the phone touches the head).

Reference points on the phantom:

The probe positioning shall be defined in relation to three well defined points on the phantom. These points R1, R2 and R3 shall be used to calibrate the positioning system. Three other points, M for mouth, LE for left ear and/or RE for right ear (maximum acoustic coupling), shall be defined on the phantom(s) (see Figure 2). These points shall be used to allow reproducible positioning of the mobile phone in relation to the phantom.

3.3 Specifications of the SAR measurement equipment

The measurement equipment shall be calibrated as a complete system. The probe shall be calibrated together with the amplifier, measurement device and data acquisition system.

The measurement equipment shall be calibrated in each tissue equivalent liquid at the appropriate operating frequency and temperature according to the methodology defined in IEC 62209-1-2005. The minimum detection limit shall

be lower than 0,02 W/kg and the maximum detection limit shall be higher than 100 W/kg. The linearity shall be within 0,5 dB over the SAR range from 0,02 to 100 W/kg. The isotropy shall be within 1 dB. Sensitivity, linearity and isotropy shall be determined in the tissue equivalent liquid. The response time shall be specified.

3.4 Scanning system specifications

The scanning system holding the probe shall be able to scan the whole exposed volume of the phantom in order to evaluate the three-dimensional SAR distribution. The mechanical structure of the scanning system shall not interfere with the SAR measurements.

The accuracy of the probe tip positioning over the measurement area shall be less than 0,2 mm. The sampling resolution shall be 1 mm or less.

3.5 Mobile phone holder specifications

The mobile phone holder shall permit the phone to be positioned according to a tolerance of 1° in the tilt angle. It shall be made of low loss and low permittivity material(s): $\tan(\delta) \leq 0,05$ and $\epsilon \leq 5$.

4. Measurement preparation

4.1 General preparation

The dielectric properties of the tissue equivalent materials shall be measured prior to the SAR measurements and at the same temperature with a tolerance of 2° C. The measured values shall comply with the values defined at the specific frequencies in IEC 62209-1-2005 6.1.1. with a tolerance of 5 % for relative permittivity and conductivity.

The phantom shell shall be filled with the tissue equivalent liquid. The depth of the tissue equivalent liquid inside the phantom and at the vertical position of the ear canal shall be at least 15 cm. The liquid shall be carefully stirred before the measurement and it shall be free of air bubbles. The coordinate system of the scanning system shall be aligned to the coordinate system of the phantom with a tolerance of 0,2 mm.

4.2 Simplified performance checking

The purpose of the simplified performance check is to verify that the system operates within its specifications, check is a simple test of repeatability to make sure that the system works correctly during the compliance test. The check shall be performed in order to detect possible drift over short time periods and other errors in the system,

The simplified performance check shall be carried out according to annex D of IEC 62209-1-2005. The simplified performance check shall be performed

prior to compliance tests and the result shall be within $\pm 10\%$ of the target value. After the system validation check. The simplified performance check shall be performed at a central frequency of each transmitting band of the mobile phone.

4.3 Preparation of the mobile phone under test

The tested mobile phone shall use its internal transmitter. The battery shall be fully charged before each measurement. The output power and frequency (channel) shall be controlled by 8960 (base station simulator). Philips ZTE-C S265 transmit its highest output peak power level allowed by the system. The BTS antenna shall be placed at least 50 cm from the phone. The signal emitted by the emulator at antenna feed point shall be lower than the output level of the phone by at least 30 dB.

4.4 Position of the mobile phone in relation to the phantom

The mobile phone shall be tested in the cheek and tilted positions on left and right sides of the phantom.

Definition of the cheek position:

- a) Position the device with the vertical centre line of the body of the device and the horizontal line crossing the centre of the ear piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical centre line with the reference plane containing the three ear and mouth reference points (M, RE and LE) and align the centre of the ear piece with the line RE-LE;
- b) Translate the mobile phone box towards the phantom with the ear piece aligned with the line LE-RE until the phone touches the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the box until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

Definition of the tilted position:

- a) Position the device in the Tilt position described above;
- b) While maintaining the device in the reference plane described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost. (see Figure 2)

Definition of the flat position:

A separation distance of 1.5 cm between the back of the device or the front of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

We can identify that the results are the worst case when the device faces away

the phantom. The results can prove the point. (see table 4)

Position the device under the phantom. (see the Figure 3)



**Fig 2 - Definition of the reference lines and points, on the phone
and on the phantom and initial position**

c) Position the device under the phantom on the condition of Flat. (see the Figure 3)

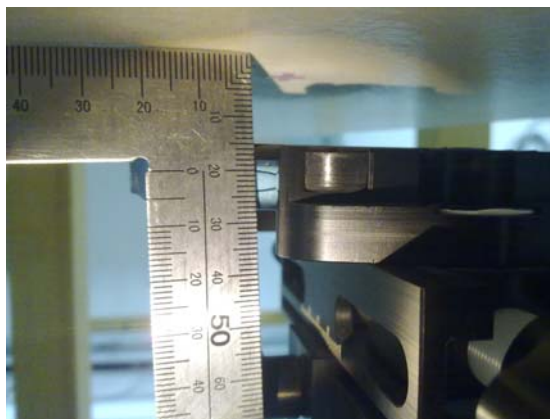


Fig 3 – Face away the phantom with the distance of 15mm

4.5 Tests to be performed

Tests shall be performed with both phone positions described in 4.4, on the left and right sides of the head and using the centre frequency of each operating band. The configuration giving rise to the maximum mass-averaged SAR shall be used to test the low-end and the high-end frequencies of the transmitting band. If the mobile phone has a retractable antenna, all of the tests described above shall be performed both with

The antenna extended and with it retracted. When considering multi- mode and multi-band mobile phones, all of the above tests shall be performed in each transmitting mode/band with the corresponding maximum peak power level.

5. The Measurement system

5.1 DASY4 Information

DASY4 is an abbreviation of "Dosimetric Assessment System" and describes a system that is able to determine the SAR distribution inside a phantom of a human being according to different standards. The DASY4 system consists of the following items as shown in Fig3. Fig4 shows the installation in the SRMC laboratory [DASY2004].

- High precision robot with controller
- Measurement server (for surveillance of the robot operation and signal filtering)
- Data acquisition electronics DAE (for signal amplification and altering)
- Field probes calibrated for use in liquids
- Electro-optical converter EOC (conversion from the optical into a digital signal)
- Light beam (improving of the absolute probe positioning accuracy)
- Two SAM phantoms filled with tissue simulating liquid
- DASY4 software
- SEMCAD

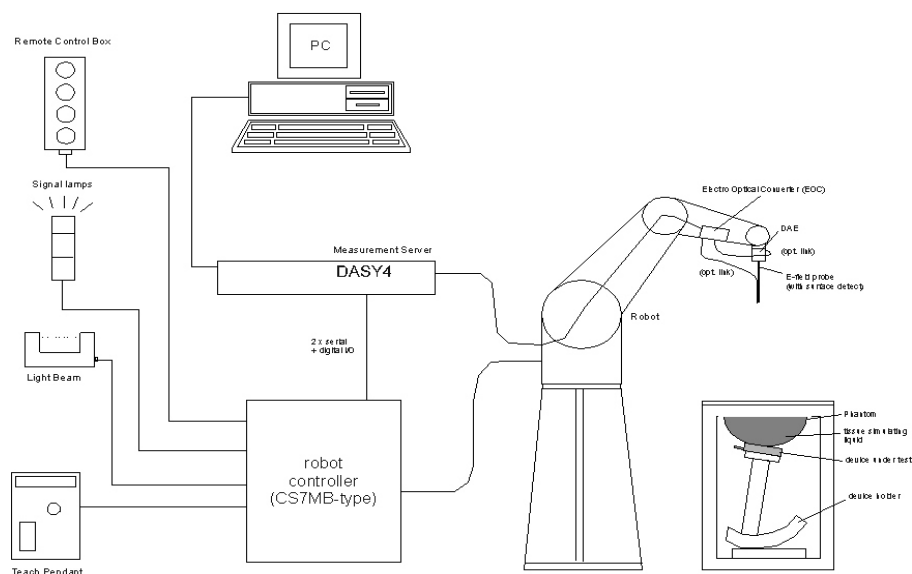


Fig3. The DASY4 measurement system

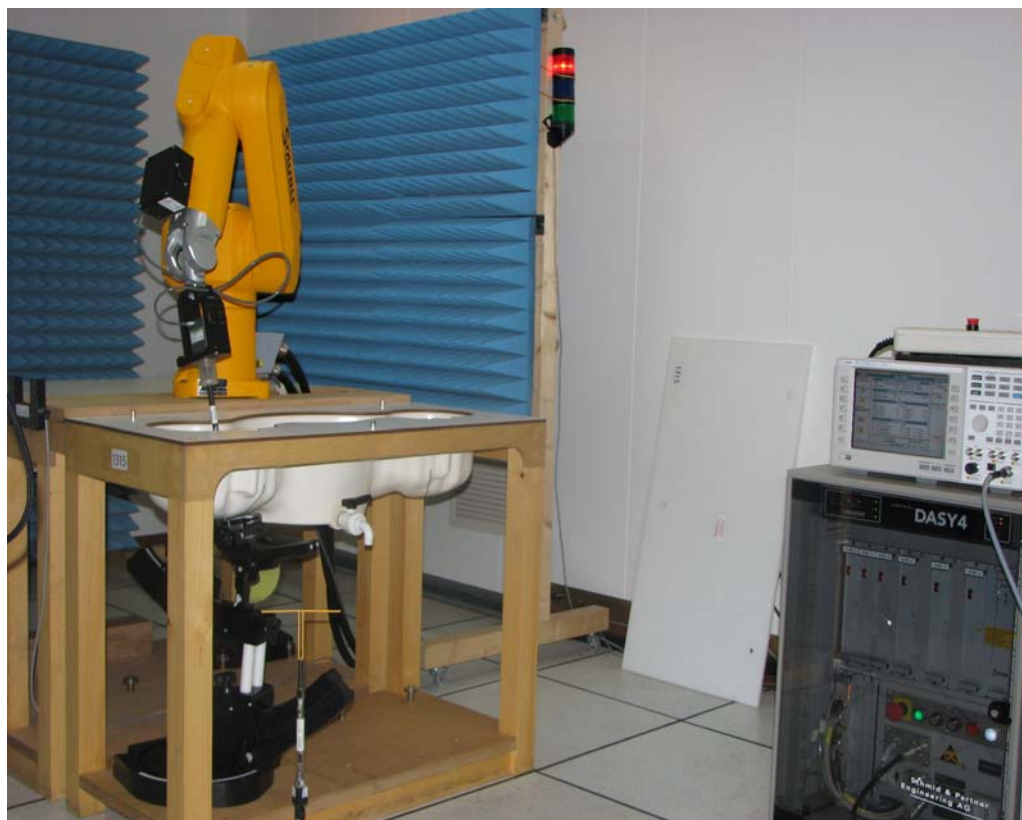


Fig 4. The measurement set-up with two SAM phantoms containing tissue simulating liquid

5.2 Test Equipments:

Name		Serial Number	Last Cal. Data
DASY4 SYSTEM			
Software Version	V4.7	N/A	N/A
Dosimetric E-Field probe	ES3DV3	3128	2009.06.22
Data Acquisition Electronics	DAE4	725	2009.06.15
Phantom	SAM	1267	N/A
Phantom	SAM	1315	N/A
Performance checking			
System Validation Dipole	D835V2	4d023	2008.06.17
RF source	E4428C	MY45280865	2009.8.20
RF Amplifier	5S1G4	0323472	N/A
Power Meter	E4417A	MY45101182	2009.8.20
Power Meter probe	E4412A	MY41502214	2009.8.20
Power Meter probe	E4412A	MY41502130	2009.8.20
Attenuator	2	BM0059	2009.8.20
Attenuator	2	BM6452	2009.8.20
Attenuator	2	BM8993	2009.8.20
Directional Coupler	778D-012	13733	2009.8.20
Material Measurement			
Network Analyzer	8714ET	US40372083	2009.8.20
Dielectric Probe Kit	85070D	US33030365	N/A
General			
Radio Tester	E5515C	GB43194054	2009.8.20

Note: The Dipole Calibration interval is 24 months

Table 1. Test Equipments lists

5.3 Uncertainty Assessment

DASY4 Uncertainty Budget According to IEC 62209-1 [3]								
Error description	Uncertainty value	Prob. Dist.	Div.	(c_i) 1g	(c_i) 10g	Std.Unc (1g).	Std.Unc. (10g)	(v_i) V_{eff}
Measurement system								
Probe calibration	±5.9%	N	1	1	1	±5.9%	±5.9%	∞
Axial isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%	∞
Boundary effects	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
System detection limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Readout electronics	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Integration time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%	∞
RF ambient noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
RF ambient reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Probe positioner	±0.4%	R	$\sqrt{3}$	1	1	±0.2%	±0.2%	∞
Probe positioning	±2.9%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Max.SAR Eval.	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Test Sample Related								
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Device holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Power drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%	∞
Phantom and Setup								
Phantom uncertainty	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%	∞
Liquid conductivity(target)	±5.0%	R	$\sqrt{3}$	0.64	0.43	±1.8%	±1.2%	∞
Liquid conductivity(meas.)	±2.5%	N	1	0.64	0.43	±1.6%	±1.1%	∞
Liquid conductivity(target)	±5.0%	R	$\sqrt{3}$	0.6	0.49	±1.7%	±1.4%	∞
Liquid onductivity(means.)	±2.5%	N	1	0.6	0.49	±1.5%	±1.2%	∞
Combined std. Uncertainty						±10.9%	±10.7%	387
Expanded STD Uncertainty						±21.9%	±21.4%	

Table 2. Uncertainty assessment

6. Test Results

6.1 Test Environment:

The Ambient Conditions during SAR Test
Relative Humidity: 34.5%

Temp.: 23° C~24° C
Atmosphere: 101.0kPa

6.2 Test Method and Procedure

a) Measure the local SAR at a test point within 10 mm of the inner surface of the phantom. The test point shall also be close to the ear;

b) verify that the measured SAR at the point used in item 1 is stable after 3 minutes within $\pm 5\%$ in order to ensure that there is no drift due to the mobile phone electronics;

c) Measure the SAR distribution within the phantom. The spatial grid step shall be less than 20 mm. If surface scanning is used, then the distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be constant within $\pm 0,5$ mm and less than 8 mm. If volume scanning is performed, then the scanning volume shall be as close as possible to the inner surface of the phantom (less than 8 mm), the grid step shall be 5 mm or less, the grid shall extend to a depth of 25 mm and then go directly to item 6;

d) From the scanned SAR distribution, identify the position of the maximum SAR value, as well as the positions of any local maxima with SAR values of more than 50 % of the maximum value;

e) Measure SAR with a grid step less than 5 mm in a volume with a minimum size of 30 mm by 30 mm and 25 mm in depth. Separate grids shall be centred on each of the local SAR maxima;

f) Use interpolation and extrapolation procedures defined in annex C of IEC 62209-1-2005 to determine the local SAR values at the spatial resolution needed for mass averaging;

g) Repeat the SAR measurement at the initial test point used in item 1. If the two results differ by more than $\pm 5\%$ from the final value obtained in item 2, the measurements shall be repeated with a fully charged battery or the actual drift shall be included in the uncertainty evaluation.

Tests shall be performed with both phone positions of cheek and tilted, on the left and right sides of the head and using the centre frequency of each operating band. Then the configuration giving rise to the maximum mass-averaged SAR shall be used to test the low-end and the high-end frequencies of the transmitting band. If the mobile phone has a retractable antenna, all of the tests described above shall be performed both with the antenna extended and with it retracted. When considering multi- mode and multi-band mobile phones, all of the above tests shall be performed in each transmitting mode/band with the corresponding maximum peak power level.

6.3 Test Configuration

The test shall be performed in the shield room.

Please refer to chapter 7.2 of this report for the test mode used during testing.

Please refer to chapter 7.8; 7.9 of this test report for photo of this test setup.

6.4 Test Results

Mode: CDMA 835

f_L (MHz)=824.70MHz f_M (MHz)=836.52MHz f_H (MHz)= 848.31MHz

SAR Values (Head, 835MHz Band SO55 RC3 FULL RATE)

Limit of SAR (W/kg)	1 g Average	
	1.6	
Test Case	Measurement Result (mW/g)	
	1 g Average	
Left hand, Touch cheek , f_L	0.65	
Left hand, Touch cheek, f_M	0.80	
Left hand, Touch cheek , f_H	0.60	
Left hand, Tilt 15 Degree, f_M	0.42	
Right hand, Touch cheek , f_L	---	
Right hand, Touch cheek, f_M	0.76	
Right hand, Touch cheek f_H	---	
Right hand, Tilt 15 Degree, f_M	0.34	

So, the maximum SAR is

Phantom Configuration	Device Test Position	SAR(mW/g)		
		f_L (MHz)	f_M (MHz)	f_H (MHz)
left Side	cheek	---	0.80	----

Note1: Please refer to 7.7 of this test report for graphical results.

Table 3. SAR Results

Mode: CDMA 835

$f_L(\text{MHz})=824.70\text{MHz}$

$f_M(\text{MHz})=836.52\text{MHz}$

$f_H(\text{MHz})= 848.31\text{MHz}$

SAR Values (Body, 835MHz Band with headset SO32 RC3 FCH-SCH)

Limit of SAR (W/kg)		1g Average
		1.6
Test Case		Measurement Result (mW/g)
		1g Average
Towards ground	f_H	---
Towards ground	f_M	0.613
Towards ground	f_L	---
Towards phantom	f_H	---
Towards phantom	f_M	0.511
Towards phantom	f_L	---

So, the maximum SAR is

Phantom Configuration	SAR(mW/g)		
	$f_L(\text{MHz})$	$f_M(\text{MHz})$	$f_H(\text{MHz})$
Towards ground	---	0.613	---

Table 4. SAR Results

7. Appendix

7.1 Administrative Data

Date of measurement: 2010.6.12

Data stored: SRMC2010-H024-E0047

7.2 Device under Test and Test Conditions

TYPE: ZTE-C S265

Date of receipt: 2010.6.12

IMEI: A100000607F99D

Equipment class: Portable device

EUT status: production

Power Class: 23.0dBm

RF exposure environment: General Population

Power supply: Internal Battery (Other batteries not available)

Measurement Standards: IS2000

Method to establish a call: CDMA 2000 Base station simulator, using the air interface

Modulation: OQPSK

Tx: 824~849MHz

Rx: 869~894MHz

Used TX Channels: L: ch1013; M: ch384; H: ch777 (refer to the table 5)

Duty cycle: 1:1(100%)

Head SAR Measurements

SAR for head exposure configurations was measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55. SAR for RC1 was not required when the maximum average output of each channel was less than $\frac{1}{4}$ dB higher than that measured in RC3. Otherwise, SAR was measured on the maximum output channel in RC1 using the exposure configuration that results in the highest SAR for that channel in RC3.

Body SAR Measurements

SAR for body exposure configurations was measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. SAR for multiple code channels (FCH + SCHn) was not required when the maximum average output of each RF channel was less than $\frac{1}{4}$ dB higher than that measured with FCH only. Otherwise, SAR was measured on the maximum output channel (FCH + SCHn) with FCH at full rate and SCH0 enabled at 9600 bps using the exposure configuration that results in the highest SAR for that channel with FCH only. When multiple code channels were enabled, the DUT output may shift by more than 0.5 dB and lead to higher SAR drifts and SCH dropouts.

Body SAR in RC1 was not required when the maximum average output of each channel was less than $\frac{1}{4}$ dB higher than that measured in RC3. Otherwise, SAR was measured on the maximum output channel in RC1; with Loopback Service Option SO55, at full rate, using the body exposure configuration that resulted in the highest SAR for that channel in RC3.

Note: All the procedures described above were followed according to FCC" SAR Measurement Procedure for 3G Devices, June 2006"

Test communication setup meet as followings:

Communication standard between mobile station and base station simulator	3GPP2 C.S0011-B
Radio configuration	RC3(supporting CDMA 1X)
Date Rate	9600bps
Service Options	SO55(Loop back mode)
Service Options	SO32(Test Date mode)
Multiplex Options	The mobile station does not support this service

Base station Simulator: 8960

Test Parameter setup for maximum RF output power according to section 4.4.5 of 3GPP2 C.S0011-B:

Parameters for Max. Power for RC1

Parameter	Units	Value
I_{or}	dBm/1.23 MHz	-104
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

Parameters for Max. Power for RC3

Parameter	Units	Value
I_{or}	dBm/1.23 MHz	-86
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

Mode: SO55 RC1Full rate

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
824.70	1013	22.7
836.52	384	23.2
848.31	777	22.5

Mode: SO55 RC3 Full rate

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
824.70	1013	23.7
836.52	384	24.1
848.31	777	23.5

Mode:SO32 RC3 FCH-SCH

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
824.70	1013	23.7
836.52	384	24.0
848.31	777	23.6

Mode:SO32 RC3 FCH+SCH

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
824.70	1013	23.6
836.52	384	23.8
848.31	777	23.5

*RC Configuration tested at “all up” power control bit.

Table5. Frequency and Measured power of EUT's Tx channels

For SAR test, the maximum power output is very important and essential; it is identical under the measurement uncertainty. It is proper to use typical Test Mode 3 (FW RC3, RVS RC3, SO55) as the worst case for SAR test.

Under the loop back mode between mobile station and 8960, the transmitter continuously emits with maximum power more strong than voice mode, so the SAR test was done with loop back mode.

Used Phantom: SAM Twin Phantom V4.0, as defined by IEC 62209-1-2005 and delivered by Schmid&Parb1er Engineering AG.

7.3 Tissue Recipes

Head Tissue Simulant

The following recipes are provided in percentage by weight.

835 MHz:

40.29 %	Water
57.90 %	Sugar
1.38%	NaCl salt
0.24%	Cellulose
0.18%	Preventol

Body Tissue Simulant

The following recipes are provided in percentage by weight.

835MHz:

50.75 %	Water
48.21 %	Sugar
0.94%	NaCl salt
0%	Cellulose
0.10%	Preventol

7.4 Material Parameters

For the measurement of the following parameters the HP 85070D dielectric probe kit is used, representing the open-ended coaxial probe measurement procedure. Liquid temperature during the test: 22.3° C.

Head		ϵ_r	σ [S/m]	Temperature	
				Ambient [°C]	Liquid [°C]
835MHz	Recommended Value	41.5±2.1	0.9±0.045	15-30	-
	Measured Value	41.5	0.89	24.0	22.3

Body		ϵ_r	σ [S/m]	Temperature	
				Ambient [°C]	Liquid [°C]
835MHz	Recommended Value	55.2±2.76	0.97±0.0485	15-30	---
	Measured Value	53.7	0.99	24.0	22.3

Table6: Parameters of the head tissue simulating liquids

7.5 Setup for System Performance Check

(see also Chapter 15 System Performance Check of DAY 4 System handbook)

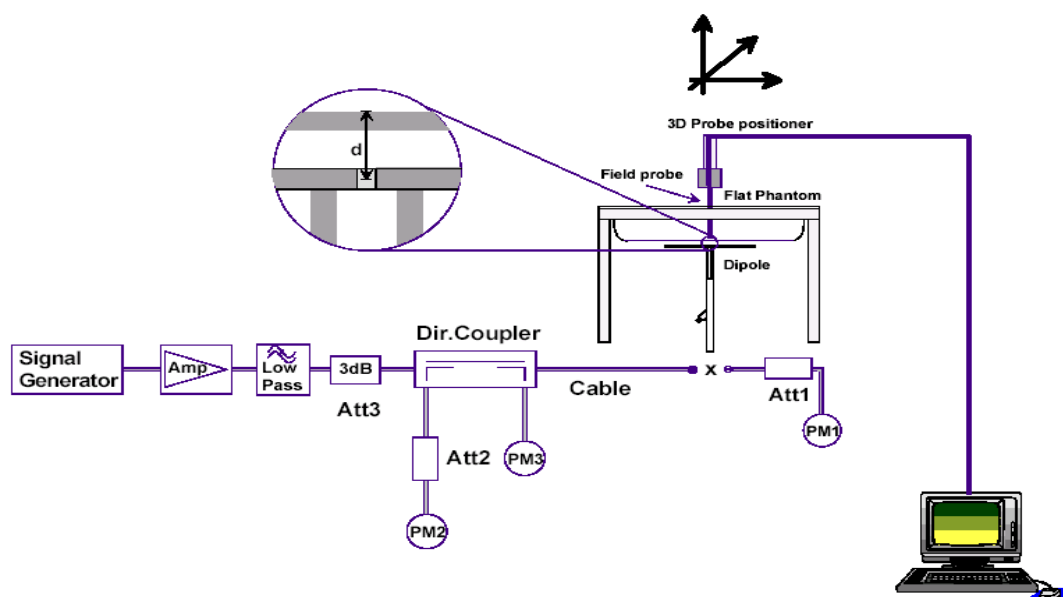


Fig5. Setup for system performance Check

First the power meter PM1 is connected to the cable and it measures the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the (Att1) value) and the power meter PM2 is read at that level. Then after connecting the cable to the dipole, the signal generator is readjusted for the same reading at the power meter PM2. If the signal generator does not allow a setting in 0,01 dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole and ensures that the value is not changed from the previous value. The reflected power should be 20 dB below the forwarded power.

Error description	ToL.	Prob. Dist.	Div.	(c_i) 1g	(c_i) 10g	Std.Unc (1g).	Std.Unc (10g)	(v_i) V_{eff}
Measurement system								
Probe calibration	±5.9%	N	1	1	1	±5.9%	±5.9%	∞
Axial isotropy	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
Hemispherical isotropy	±9.6%	R	$\sqrt{3}$	0	0	0	0	∞
Boundary effects	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
System detection limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Readout electronics	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response time	0	R	$\sqrt{3}$	1	1	0	0	∞
Integration time	0	R	$\sqrt{3}$	1	1	0	0	∞
RF ambient noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
RF ambient reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Probe positioner	±0.4%	R	$\sqrt{3}$	1	1	±0.2%	±0.2%	∞
Probe positioning	±2.9%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Algorithms for Max.SAR Eval.	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Dipole								
Dipole Axis to Liquid Distance	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%	∞
Input power and SAR drift meas.	±4.7%	N	1	1	1	±2.7%	±2.7%	∞
Phantom and Tissue Param								
Phantom uncertainty	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%	∞
Liquid conductivity(target)	±5.0%	R	$\sqrt{3}$	0.64	0.43	±1.8%	±1.2%	∞
Liquid conductivity(meas.)	±2.5%	N	1	0.64	0.43	±1.6%	±1.1%	∞
Liquid conductivity(target)	±5.0%	R	$\sqrt{3}$	0.6	0.49	±1.7%	±1.4%	∞
Liquid conductivity (means.)	±2.5%	N	1	0.6	0.49	±1.5%	±1.2%	∞
Combined std. Uncertainty						±9.2%	±8.9%	∞
Coverage Factor for 95%	$k_p = 2$							
Expanded STD Uncertainty						±18.4%	±17.8%	

Table 7:Uncertainty Budget for the system performance check

7.6 Test Results

835MHz/Head

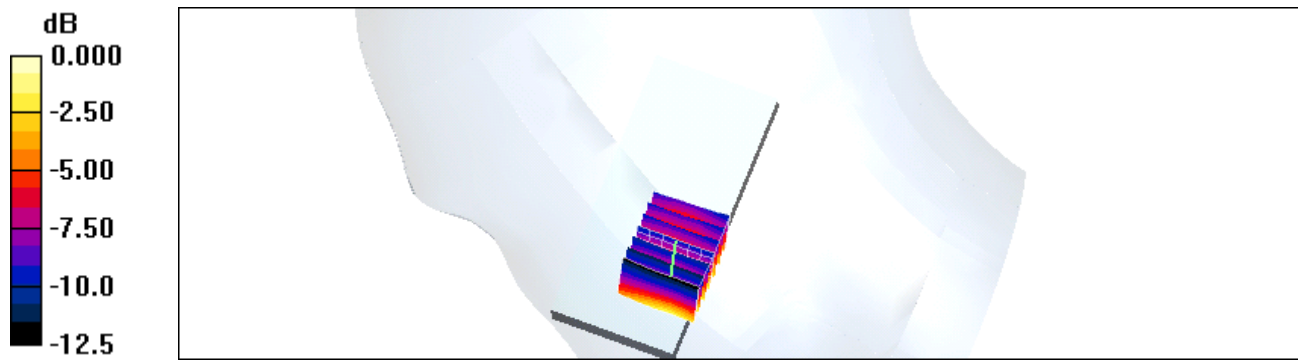
Right Side	Cheek	836.52MHz
Communication System: cdma 2000 835; Frequency: 836.52 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY4 Configuration: - Probe: ES3DV3 - SN3128; ConvF(5.68, 5.68, 5.68); Calibrated: 6/22/2009 - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn725; Calibrated: 6/15/2009 - Phantom: SAM 1315; Type: SAM; Serial: 1315 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186 Touch position -middle RC3 S055/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 8.06 V/m; Power Drift = 0.062 dB Peak SAR (extrapolated) = 1.16 W/kg SAR(1 g) = 0.761 mW/g; SAR(10 g) = 0.489 mW/g Info: Interpolated medium parameters used for SAR evaluation. Maximum value of SAR (measured) = 0.830 mW/g  0 dB = 0.830mW/g		

Fig6 SAR Test result

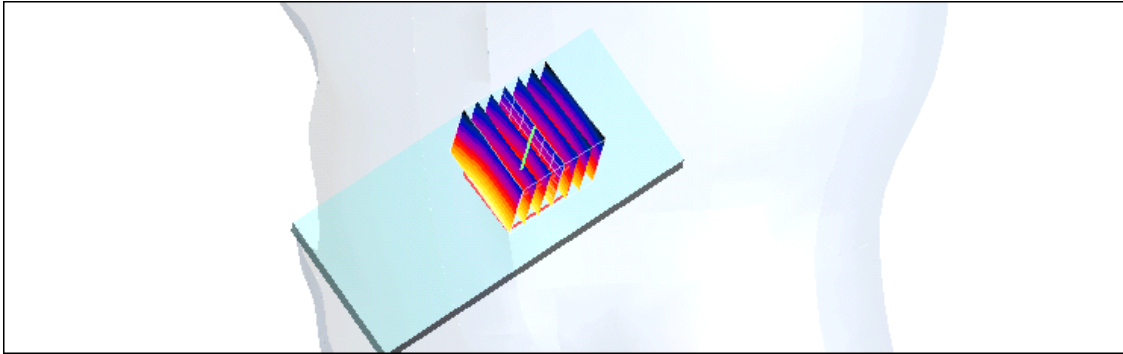
Right Side	Tilt	836.52MHz
Communication System: cdma 2000 835; Frequency: 836.52 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY4 Configuration: - Probe: ES3DV3 - SN3128; ConvF(5.68, 5.68, 5.68); Calibrated: 6/22/2009 - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn725; Calibrated: 6/15/2009 - Phantom: SAM 1315; Type: SAM; Serial: 1315 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186 Tilt position - middle RC3 S055/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 13.8 V/m; Power Drift = 0.039 dB Peak SAR (extrapolated) = 0.450 W/kg SAR(1 g) = 0.339 mW/g; SAR(10 g) = 0.244 mW/g Info: Interpolated medium parameters used for SAR evaluation. Maximum value of SAR (measured) = 0.363 mW/g dB 0.000 -1.86 -3.72 -5.58 -7.44 -9.30  0 dB = 0.363mW/g		

Fig7 SAR Test result

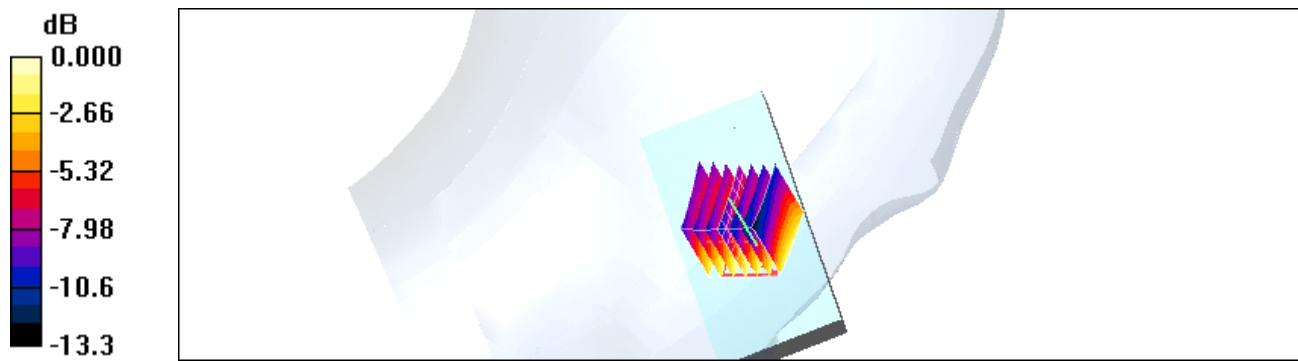
Left Side	Cheek	836.52 MHz
Communication System: cdma 2000 835; Frequency: 836.52 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY4 Configuration: - Probe: ES3DV3 - SN3128; ConvF(5.68, 5.68, 5.68); Calibrated: 6/22/2009 - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn725; Calibrated: 6/15/2009 - Phantom: SAM 1315; Type: SAM; Serial: 1315 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186 Touch position -middle RC3 S055/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 12.3 V/m; Power Drift = -0.177 dB Peak SAR (extrapolated) = 1.14 W/kg SAR(1 g) = 0.796 mW/g; SAR(10 g) = 0.527 mW/g Info: Interpolated medium parameters used for SAR evaluation. Maximum value of SAR (measured) = 0.854 mW/g  0 dB = 0.854mW/g		

Fig8 SAR Test result

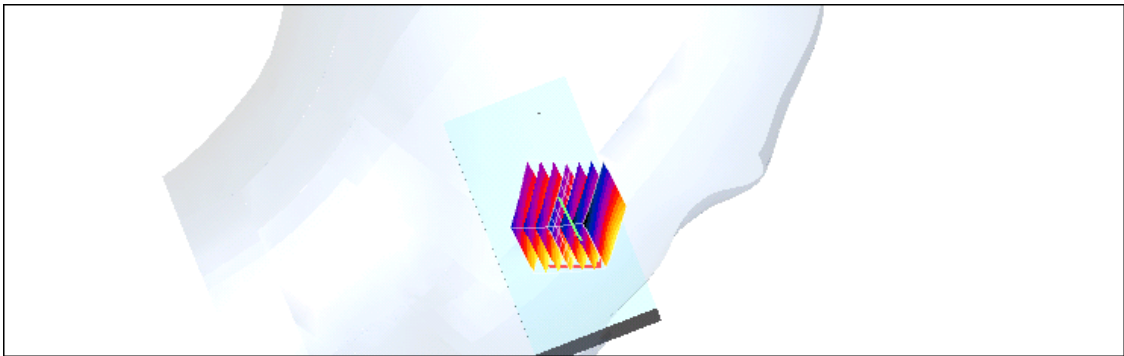
Left Side	Cheek	824.70MHz
Communication System: cdma 2000 835; Frequency: 824.7 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 824.7$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY4 Configuration: - Probe: ES3DV3 - SN3128; ConvF(5.68, 5.68, 5.68); Calibrated: 6/22/2009 - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn725; Calibrated: 6/15/2009 - Phantom: SAM 1315; Type: SAM; Serial: 1315 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186 Touch position - low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5mm$, $dy=5mm$, $dz=5mm$ Reference Value = 9.68 V/m; Power Drift = 0.065 dB Peak SAR (extrapolated) = 0.945 W/kg SAR(1 g) = 0.653 mW/g; SAR(10 g) = 0.438 mW/g Info: Interpolated medium parameters used for SAR evaluation. Maximum value of SAR (measured) = 0.696 mW/g  0 dB = 0.696mW/g		

Fig9 SAR Test result

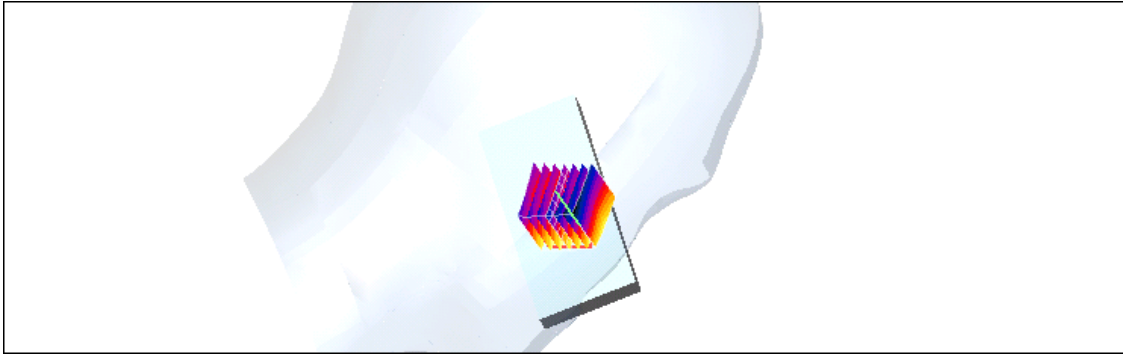
Left Side	Cheek	848.31 MHz
Communication System: cdma 2000 835; Frequency: 848.31 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY4 Configuration: - Probe: ES3DV3 - SN3128; ConvF(5.68, 5.68, 5.68); Calibrated: 6/22/2009 - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn725; Calibrated: 6/15/2009 - Phantom: SAM 1315; Type: SAM; Serial: 1315 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186 Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.82 V/m; Power Drift = 0.149 dB Peak SAR (extrapolated) = 0.863 W/kg SAR(1 g) = 0.599 mW/g; SAR(10 g) = 0.397 mW/g Info: Interpolated medium parameters used for SAR evaluation. Maximum value of SAR (measured) = 0.641 mW/g dB 0.000 -2.66 -5.32 -7.98 -10.6 -13.3  0 dB = 0.641mW/g		

Fig10 SAR Test result


Left Side	Tilt	836.52 MHz
Communication System: cdma 2000 835; Frequency: 836.52 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 39.4$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY4 Configuration: - Probe: ES3DV3 - SN3128; ConvF(5.68, 5.68, 5.68); Calibrated: 6/22/2009 - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn725; Calibrated: 6/15/2009 - Phantom: SAM 1315; Type: SAM; Serial: 1315 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186 Tilt position - middle RC3 S055/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 17.4 V/m; Power Drift = -0.038 dB Peak SAR (extrapolated) = 0.571 W/kg SAR(1 g) = 0.418 mW/g; SAR(10 g) = 0.292 mW/g Info: Interpolated medium parameters used for SAR evaluation. Maximum value of SAR (measured) = 0.449 mW/g dB 0.000 -2.24 -4.48 -6.72 -8.96 -11.2  0 dB = 0.449mW/g		

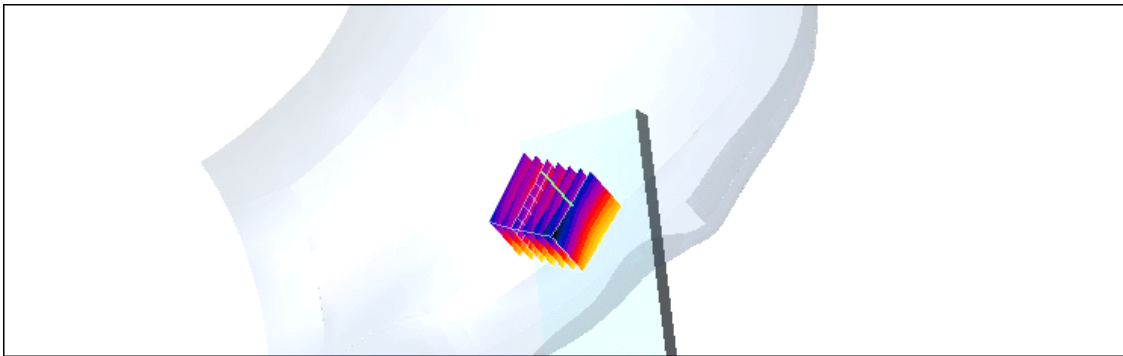Fig11 SAR Test result

835MHz/ Body

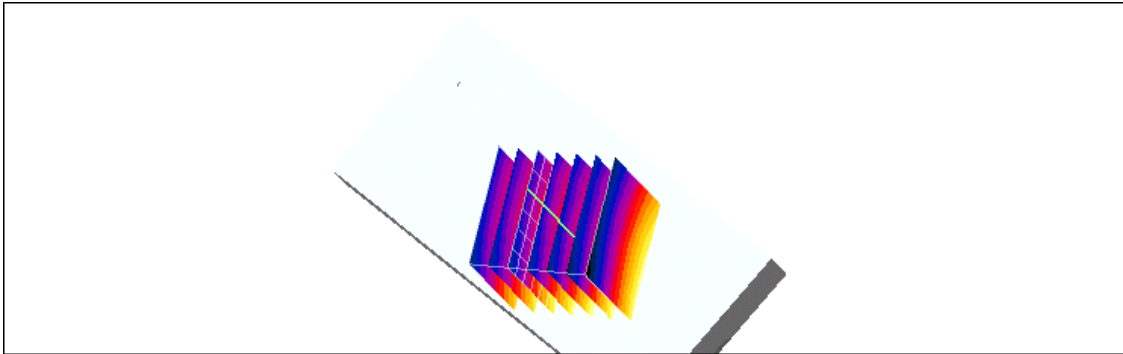
Towards ground	836.52 MHz
Communication System: cdma 2000 835; Frequency: 836.52 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY4 Configuration: - Probe: ES3DV3 - SN3128; ConvF(5.72, 5.72, 5.72); Calibrated: 6/22/2009 - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn725; Calibrated: 6/15/2009 - Phantom: SAM 1315; Type: SAM; Serial: 1315 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186 towards ground-middle RC3 S032 FCH/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 20.4 V/m; Power Drift = -0.029 dB Peak SAR (extrapolated) = 0.857 W/kg SAR(1 g) = 0.613 mW/g; SAR(10 g) = 0.426 mW/g Info: Interpolated medium parameters used for SAR evaluation. Maximum value of SAR (measured) = 0.659 mW/g  0 dB = 0.659mW/g	

Fig12 SAR Test result

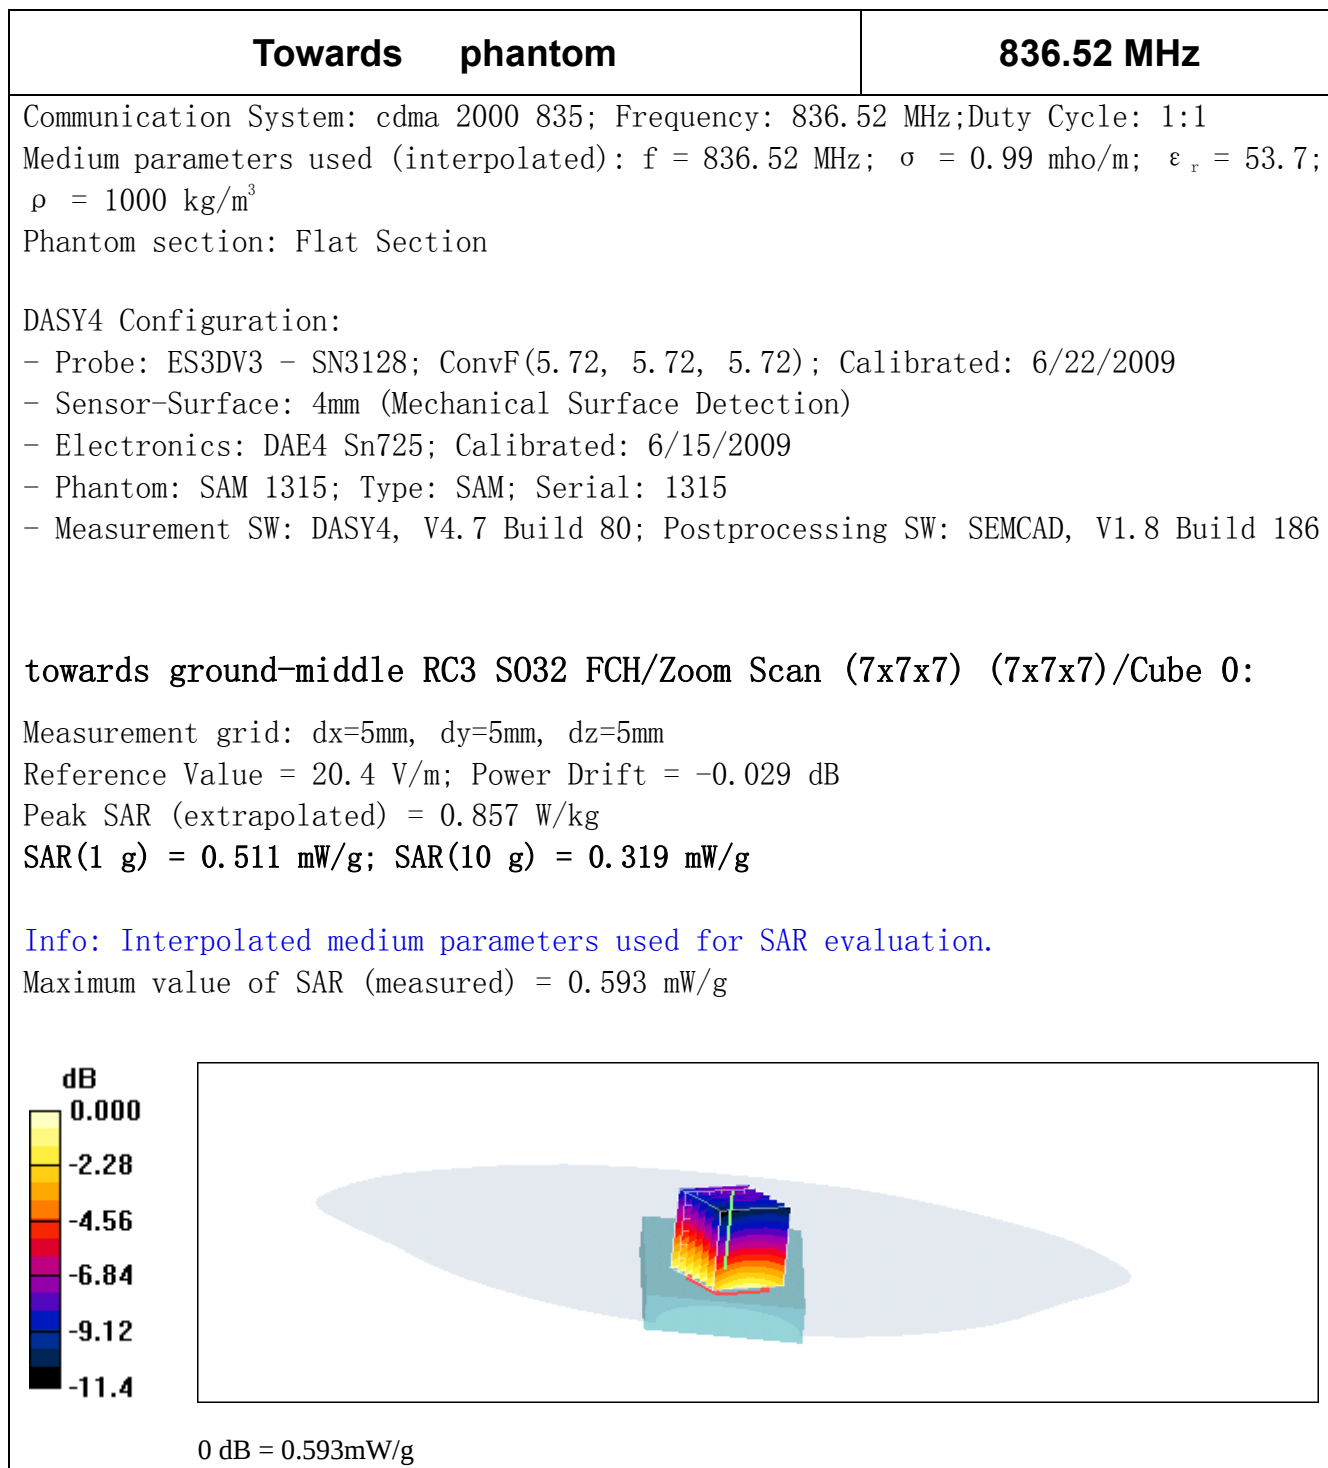
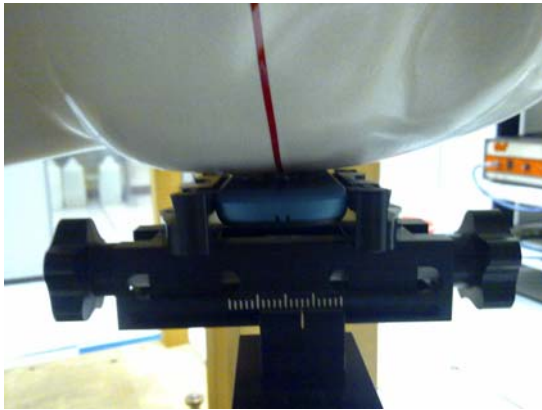
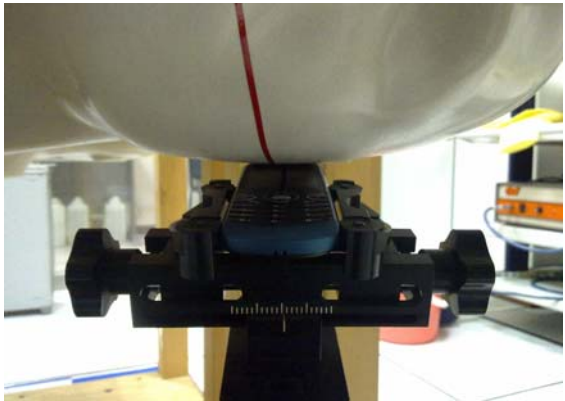



Fig913 SAR Test result

7.7 Pictures of the device under test

	
Front view of the device	back view of the device

7.8 Test Positions for the Device under test

	
Cheek position, left side	Tilt position, left side
	
Cheek position, Right side	Tilt position, Right side

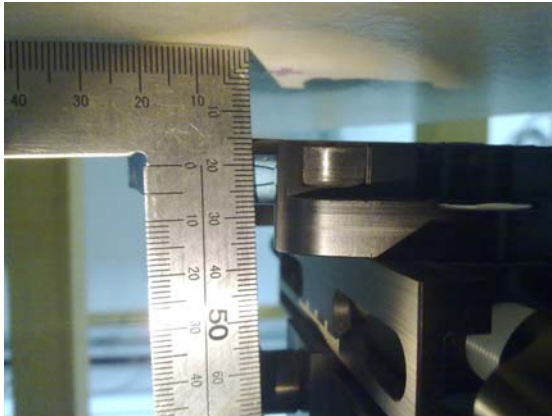

Body position with a headset

7.9 Picture to demonstrate the required liquid depth

the liquid depth in the used SAM phantoms



Liquid depth for SAR Measurement

7.10 Simplified Performance Checking

The simplified performance check was realized using the dipole validation kits. The input power of the dipole antennas were 250mW (cw signal) and they were placed under the flat part of the SAM phantom. The results are listed in the Table 8. The target values were adopted from the IEEE1528. Table 7 includes the uncertainty assessment for the system performance checking which was suggested by the IEC 62209-1-2005 and determined by Schmid & Partner Engineering AG. The expanded uncertainty is assessed to be $\pm 21.9\%$. Measurement is made at temperature 24°C , relative humidity 34.5%, Liquid temperature during the test: 22.3°C . System validation date: 2010.6.12

		SAR_{1g} [w/kg]	ϵ_r	$\sigma[\text{S/m}]$	Temperature	
					Ambient[$^{\circ}\text{C}$]	Liquid[$^{\circ}\text{C}$]
835MHz	Target Value	9.5	41.5 ± 2.1	0.9 ± 0.045	15-30	---
	Measured Value	9.3	41.5	0.89	24.0	22.3

All SAR values are normalized to 1W forward power

Table8: Validation results, 835 MHz

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client SRMC (PTT)

Certificate No: ES3-3128_Jun09

CALIBRATION CERTIFICATE

Object ES3DV3 - SN:3128

Calibration procedure(s) QA CAL-01.v6 and QA CAL-23.v3
Calibration procedure for dosimetric E-field probes

Calibration date: June 22, 2009

Condition of the calibrated item In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10
Reference 30 dB Attenuator	SN: S5129 (30b)	31-Mar-09 (No. 217-01027)	Mar-10
Reference Probe ES3DV2	SN: 3013	2-Jan-09 (No. ES3-3013_Jan09)	Jan-10
DAE4	SN: 660	9-Sep-08 (No. DAE4-660_Sep08)	Sep-09
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-08)	In house check: Oct-09

Calibrated by: Jeton Kastrati Laboratory Technician

Approved by: Katja Pokovic Technical Manager

Issued: June 22, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ES3DV3 SN:3128

June 22, 2009

Probe ES3DV3

SN:3128

Manufactured:	July 11, 2006
Last calibrated:	January 24, 2007
Recalibrated:	June 22, 2009

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

ES3DV3 SN:3128

June 22, 2009

DASY - Parameters of Probe: ES3DV3 SN:3128

Sensitivity in Free Space^A

NormX	1.26 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	92 mV
NormY	1.36 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	94 mV
NormZ	1.32 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	94 mV

Diode Compression^B

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		3.0 mm	4.0 mm
SAR _{be} [%]	Without Correction Algorithm	9.7	5.5
SAR _{be} [%]	With Correction Algorithm	0.7	0.5

TSL 1750 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		3.0 mm	4.0 mm
SAR _{be} [%]	Without Correction Algorithm	8.9	5.2
SAR _{be} [%]	With Correction Algorithm	0.8	0.6

Sensor Offset

Probe Tip to Sensor Center 2.0 mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).

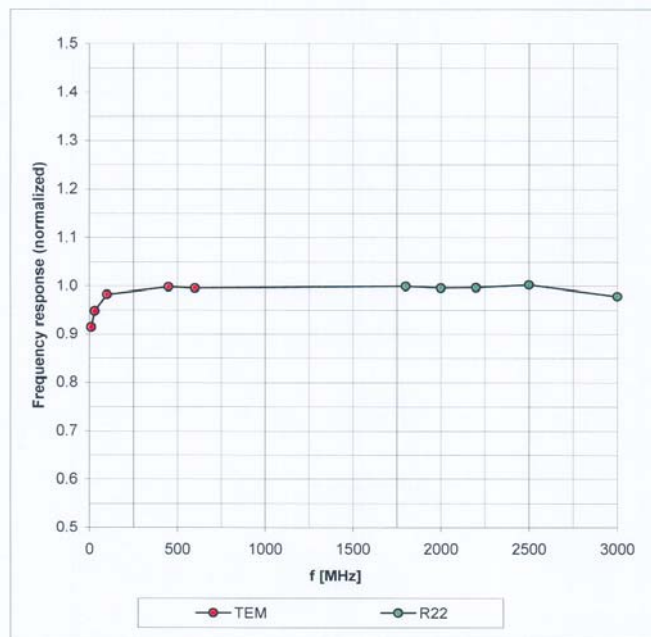
^B Numerical linearization parameter: uncertainty not required.

ES3DV3 SN:3128

June 22, 2009

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)




Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

ES3DV3 SN:3128

June 22, 2009

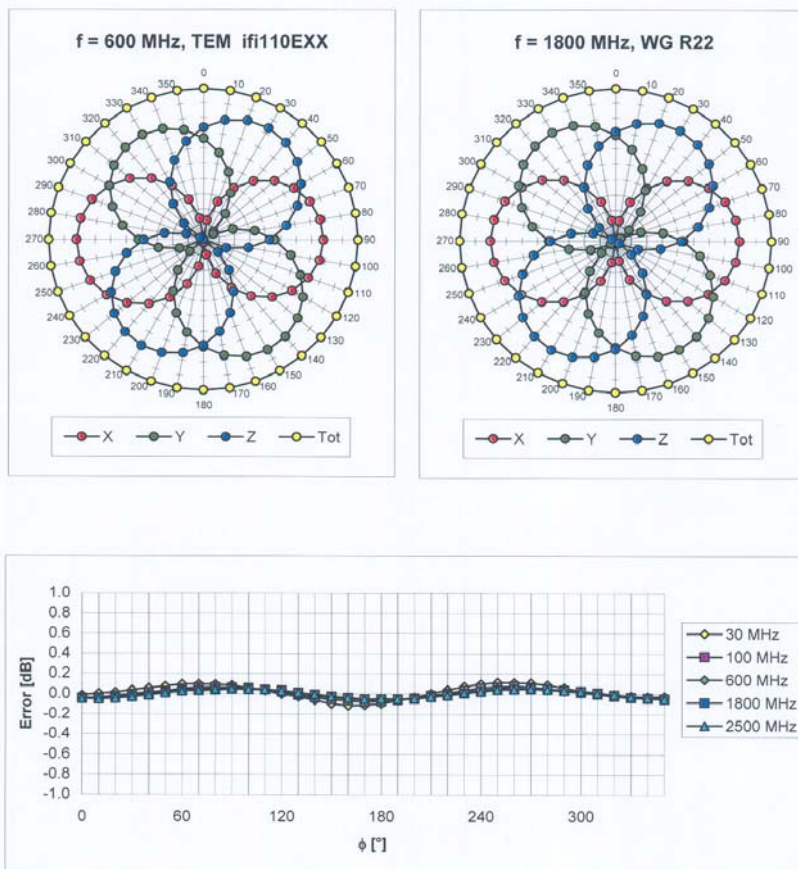Receiving Pattern (ϕ), $\vartheta = 0^\circ$




Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

ES3DV3 SN:3128

June 22, 2009

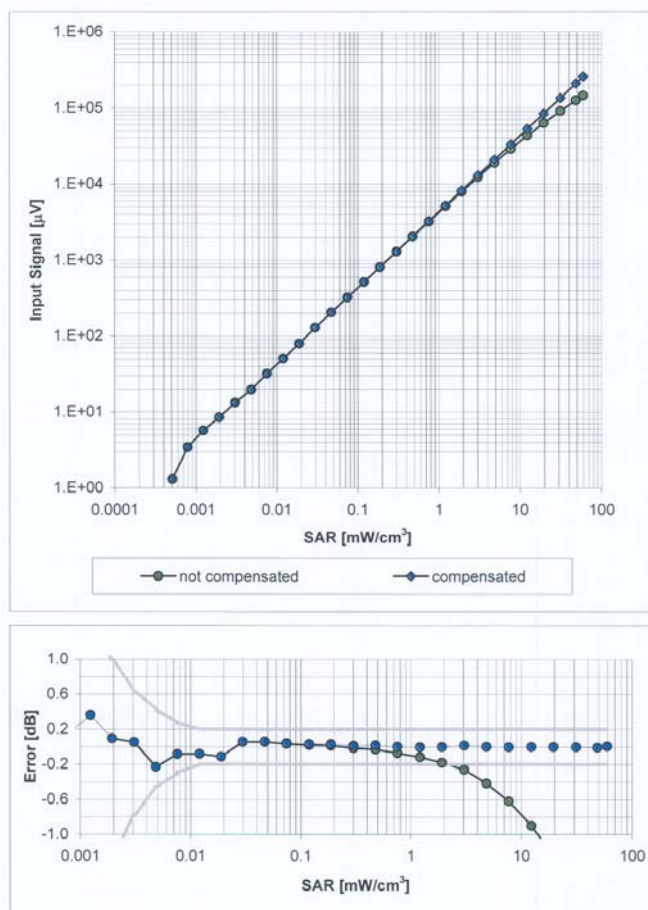Dynamic Range $f(\text{SAR}_{\text{head}})$
(Waveguide R22, $f = 1800 \text{ MHz}$)




Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

ES3DV3 SN:3128

June 22, 2009

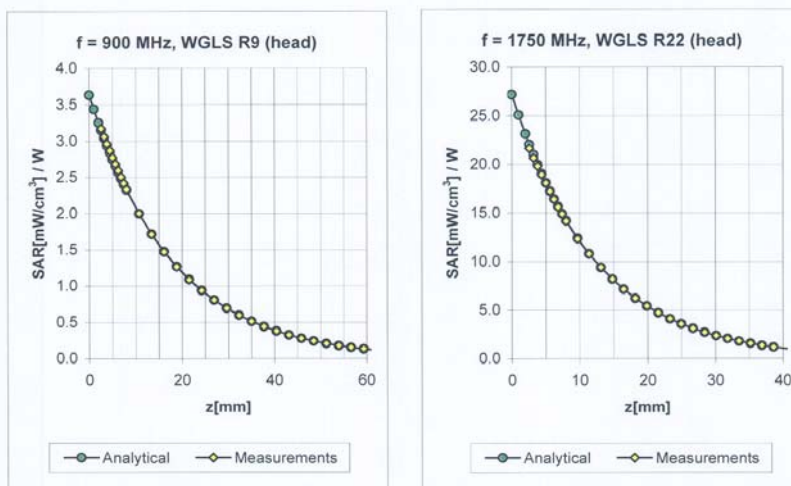Conversion Factor Assessment



f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	0.94	1.06	5.68 ± 11.0% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.83	1.11	5.52 ± 11.0% (k=2)
1750	± 50 / ± 100	Head	40.1 ± 5%	1.37 ± 5%	0.52	1.43	4.93 ± 11.0% (k=2)
1900	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.52	1.46	4.75 ± 11.0% (k=2)
2000	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.42	1.60	4.69 ± 11.0% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.74	1.21	5.72 ± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.79	1.15	5.58 ± 11.0% (k=2)
1750	± 50 / ± 100	Body	53.4 ± 5%	1.49 ± 5%	0.37	1.93	4.60 ± 11.0% (k=2)
1900	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.36	2.06	4.40 ± 11.0% (k=2)
2000	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.38	2.04	4.46 ± 11.0% (k=2)

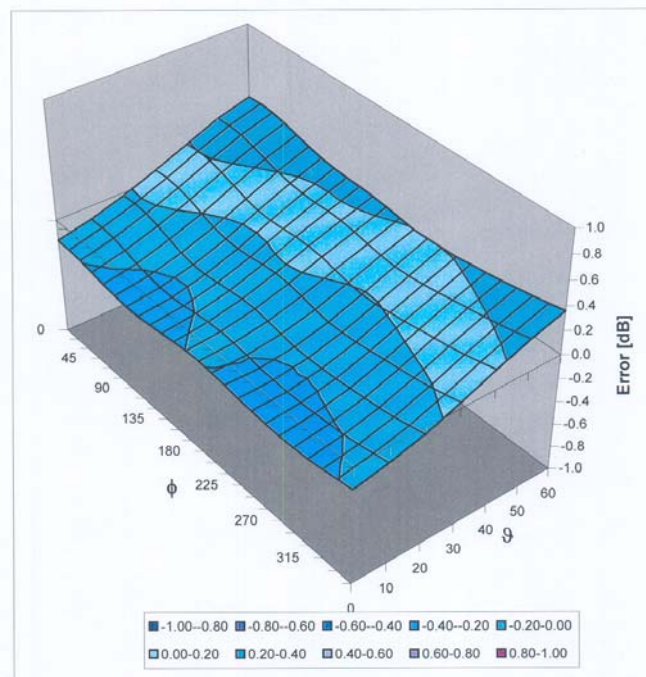
^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ES3DV3 SN:3128

June 22, 2009

Deviation from Isotropy in HSL

Error (ϕ , ϑ), $f = 900$ MHz



Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client SRMC (PTT)

Certificate No: DAE4-725_Jun09

CALIBRATION CERTIFICATE

Object DAE4 - SD 000 D04 BJ - SN: 725

Calibration procedure(s) QA CAL-06.v12
Calibration procedure for the data acquisition electronics (DAE)

Calibration date: June 15, 2009

Condition of the calibrated item In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Fluke Process Calibrator Type 702	SN: 6295803	30-Sep-08 (No: 7673)	Sep-09
Keithley Multimeter Type 2001	SN: 0810278	30-Sep-08 (No: 7670)	Sep-09
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Calibrator Box V1.1	SE UMS 006 AB 1004	05-Jun-09 (in house check)	In house check: Jun-10

Calibrated by:	Name	Function	Signature
	Daniel Hess	Technician	
Approved by:	Name	Function	Signature
	Fin Bornholt	R&D Director	

Issued: June 18, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement*: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle*: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - *DC Voltage Measurement Linearity*: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - *Common mode sensitivity*: Influence of a positive or negative common mode voltage on the differential measurement.
 - *Channel separation*: Influence of a voltage on the neighbor channels not subject to an input voltage.
 - *AD Converter Values with inputs shorted*: Values on the internal AD converter corresponding to zero input voltage
 - *Input Offset Measurement*: Output voltage and statistical results over a large number of zero voltage measurements.
 - *Input Offset Current*: Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - *Input resistance*: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - *Low Battery Alarm Voltage*: Typical value for information. Below this voltage, a battery alarm signal is generated.
 - *Power consumption*: Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1μV , full range = -100...+300 mV
Low Range: 1LSB = 61nV , full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.179 ± 0.1% (k=2)	404.931 ± 0.1% (k=2)	404.498 ± 0.1% (k=2)
Low Range	3.90830 ± 0.7% (k=2)	3.98545 ± 0.7% (k=2)	3.98641 ± 0.7% (k=2)

Connector Angle

Connector Angle to be used in DASY system	236 ° ± 1 °
---	-------------

Appendix

1. DC Voltage Linearity

High Range	Input (μV)	Reading (μV)	Error (%)
Channel X + Input	200000	199999.9	0.00
Channel X + Input	20000	20008.43	0.04
Channel X - Input	20000	-19998.02	-0.01
Channel Y + Input	200000	200000	0.00
Channel Y + Input	20000	20006.27	0.03
Channel Y - Input	20000	-20001.56	0.01
Channel Z + Input	200000	200000	0.00
Channel Z + Input	20000	20005.16	0.03
Channel Z - Input	20000	-20002.80	0.01

Low Range	Input (μV)	Reading (μV)	Error (%)
Channel X + Input	2000	2000	0.00
Channel X + Input	200	199.84	-0.08
Channel X - Input	200	-199.88	-0.06
Channel Y + Input	2000	1999.9	0.00
Channel Y + Input	200	199.32	-0.34
Channel Y - Input	200	-200.12	0.06
Channel Z + Input	2000	2000.1	0.00
Channel Z + Input	200	199.14	-0.43
Channel Z - Input	200	-201.59	0.80

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	10.11	9.02
	- 200	-7.46	-8.62
Channel Y	200	-10.61	-10.93
	- 200	10.67	9.94
Channel Z	200	-3.58	-3.89
	- 200	2.46	2.29

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	2.29	0.66
Channel Y	200	1.63	-	4.98
Channel Z	200	-0.38	-0.06	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16213	14897
Channel Y	16224	15636
Channel Z	16106	16320

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M Ω

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation (μ V)
Channel X	-0.29	-1.24	1.43	0.33
Channel Y	-2.73	-3.64	-1.66	0.39
Channel Z	-1.10	-2.27	-0.24	0.35

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance

	Zeroing (MOhm)	Measuring (MOhm)
Channel X	0.2001	200.5
Channel Y	0.2000	201.5
Channel Z	0.2000	200.0

8. Low Battery Alarm Voltage (verified during pre test)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (verified during pre test)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.0	+6	+14
Supply (- Vcc)	-0.01	-8	-9

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client SRMC (MTT)

Certificate No: D835V2-4d023_Jun08

CALIBRATION CERTIFICATE

Object D835V2 - SN: 4d023

Calibration procedure(s) QA CAL-05.v7
Calibration procedure for dipole validation kits

Calibration date: June 17, 2008

Condition of the calibrated item In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	04-Oct-07 (METAS, No. 217-00736)	Oct-08
Power sensor HP 8481A	US37292783	04-Oct-07 (METAS, No. 217-00736)	Oct-08
Reference 20 dB Attenuator	SN: 5086 (20g)	07-Aug-07 (METAS, No 217-00718)	Aug-08
Type-N mismatch combination	SN: 5047.2 / 06327	08-Aug-07 (No. 217-00721)	Aug-08
Reference Probe ES3DV2	SN: 3025	28-Apr-08 (No. ES3-3025_Apr08)	Apr-09
DAE4	SN: 601	14-Mar-08 (No. DAE4-601_Mar08)	Mar-09
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-07)	In house check: Oct-09
RF generator R&S SMT-06	100005	04-Aug-99 (SPEAG, in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Oct-07)	In house check: Oct-08

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature
----------------	------------------------	-----------------------------------	---------------

Approved by:	Name Katja Pokovic	Function Technical Manager	Signature
--------------	-----------------------	-------------------------------	---------------

Issued: June 17, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result..

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.4 $\pm$ 6 %	0.88 mho/m $\pm$ 6 %
Head TSL temperature during test	(22.0 $\pm$ 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.37 mW / g
SAR normalized	normalized to 1W	9.48 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	9.46 mW / g $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.56 mW / g
SAR normalized	normalized to 1W	6.24 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	6.21 mW / g $\pm$ 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.4 ± 6 %	0.99 mho/m ± 6 %
Body TSL temperature during test	(22.0 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.42 mW / g
SAR normalized	normalized to 1W	9.68 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	9.36 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.60 mW / g
SAR normalized	normalized to 1W	6.40 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	6.24 mW / g ± 16.5 % (k=2)

² Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$54.9 \Omega - 2.6 j\Omega$
Return Loss	-25.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$50.3 \Omega - 4.5 j\Omega$
Return Loss	- 27.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.390 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 04, 2005

DASY4 Validation Report for Head TSL

Date/Time: 16.06.2008 10:59:00

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d023

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL 900 MHz;

Medium parameters used: $f = 835$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(5.97, 5.97, 5.97); Calibrated: 28.04.2008
- Sensor-Surface: 3.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 14.03.2008
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; ;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

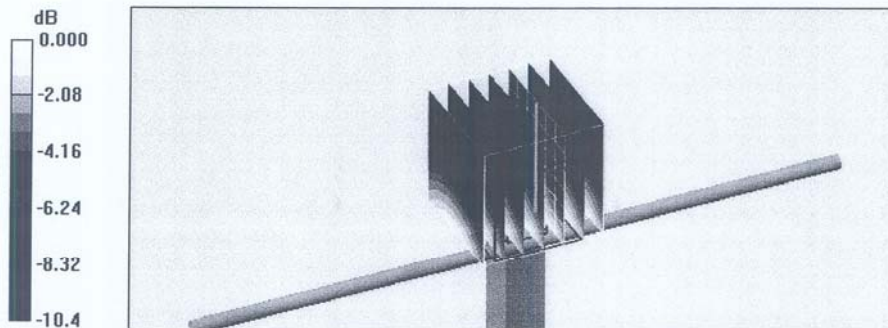
Pin=250mW; dip=15mm; dist=3.4mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.5 V/m; Power Drift = -0.056 dB

Peak SAR (extrapolated) = 3.48 W/kg


SAR(1 g) = 2.37 mW/g; SAR(10 g) = 1.56 mW/g

Maximum value of SAR (measured) = 2.68 mW/g



0 dB = 2.68mW/g

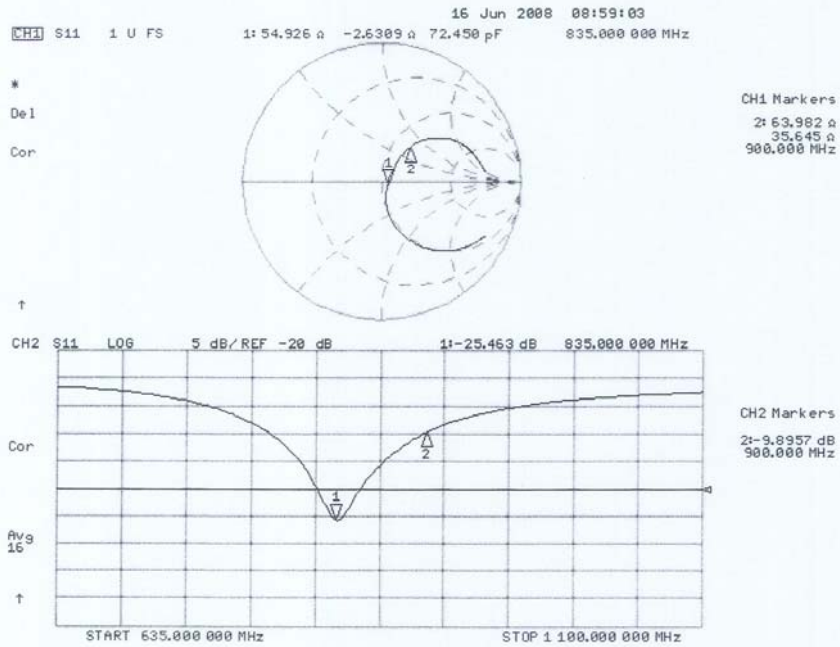Impedance Measurement Plot for Head TSL



DASY4 Validation Report for Body TSL

Date/Time: 06.06.2008 12:44:11

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d023

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL900;

Medium parameters used: $f = 835$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(5.9, 5.9, 5.9); Calibrated: 28.04.2008
- Sensor-Surface: 3.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 14.03.2008
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; ;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

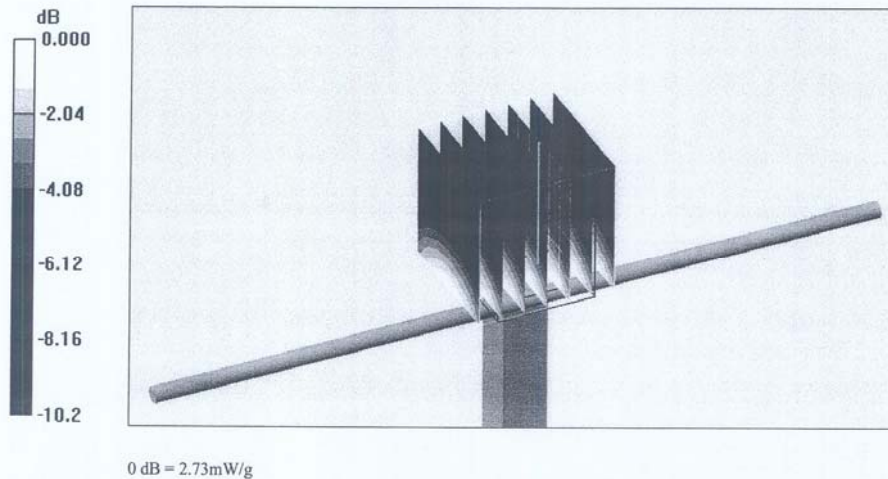
Pin = 250mW, d = 15mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.7 V/m; Power Drift = 0.008 dB


Peak SAR (extrapolated) = 3.49 W/kg

SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.6 mW/g

Maximum value of SAR (measured) = 2.73 mW/g



Impedance Measurement Plot for Body TSL

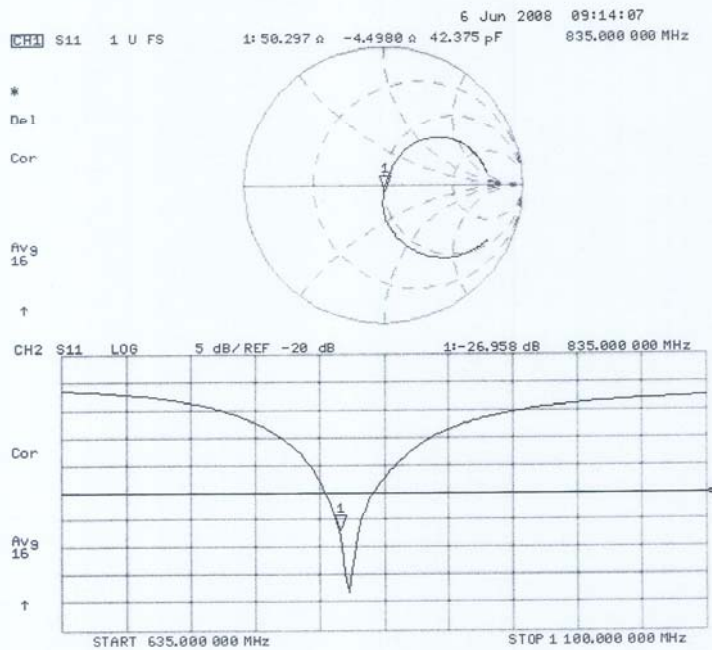

7.11 Certificate of conformity

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 1 245 9700, Fax +41 1 245 9779
info@speag.com, <http://www.speag.com>

Certificate of conformity / First Article Inspection

Item	SAM Twin Phantom V4.0
Type No	QD 000 P40 C
Series No	TP-1150 and higher
Manufacturer / Origin	Untersee Composites Hauptstr. 69 CH-8559 Fruthwilen Switzerland

Tests

The series production process used allows the limitation to test of first articles.
Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

Test	Requirement	Details	Units tested
Shape	Compliance with the geometry according to the CAD model.	IT'IS CAD File (*)	First article, Samples
Material thickness	Compliant with the requirements according to the standards	2mm +/- 0.2mm in specific areas; 6mm +/- 0.2mm at ERP	First article, Samples
Material parameters	Dielectric parameters for required frequencies	200 MHz – 3 GHz Relative permittivity < 5 Loss tangent < 0.05.	Material sample TP 104-5
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards if handled and cleaned according to the instructions	DEGMBE based simulating liquids	Pre-series, First article, Samples

Standards

- [1] CENELEC EN 50361
- [2] IEEE Std 1528-200x Draft CD 1.1 (Dec 02)
- [1] and [3].

Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date 7.8.2003

Signature / Stamp 

**Schmid & Partner
Engineering AG**

Zeughausstrasse 43, CH-8004 Zurich
Tel. +41 1 245 97 00, Fax +41 1 245 97 79

