



TEST REPORT

No. 2013TAR125

for

ZTE Corporation

HSPA+Wireless Router

Marketing Name: MF25A

FCC ID: Q78-ZTEMF25A

with

Hardware Version: PCBMF25AV1.0.0

Software Version: EN_ZTE_MF25AV1.0.0B03

Issued Date: Mar. 11th, 2013

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAkks accreditation (DIN EN ISO/IEC 17025): No. D-PL-12123-01-01

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629A-1

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633-2561 , Fax:+86(0)10-62304633-2504 Email:welcome@emcite.com. www.emcite.com

CONTENTS

1. TEST LABORATORY	3
1.1. TESTING LOCATION	3
1.2. TESTING ENVIRONMENT	3
1.3. PROJECT DATA	3
1.4. SIGNATURE.....	3
2. CLIENT INFORMATION	4
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT.....	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
3.4. EUT SET-UPS	5
4. REFERENCE DOCUMENTS.....	6
4.1. REFERENCE DOCUMENTS FOR TESTING.....	6
5. LABORATORY ENVIRONMENT.....	7
6. SUMMARY OF TEST RESULTS.....	8
7. TEST EQUIPMENTS UTILIZED.....	9
ANNEX A: MEASUREMENT RESULTS	10

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China
Postal Code: 100191
Telephone: 0086-10-62304633-2561
Fax: 0086-10-62304633-2504

1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%


1.3. Project data

Testing Start Date: Mar. 2nd, 2013
Testing End Date: Mar. 2nd, 2013


1.4. Signature



Qu Pengfei
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: ZTE Corporation
Address /Post: #68 Zijin Hua Road, Nanjing, Jiangsu Province, P. R. China
City: Nan Jing
Postal Code: 210012
Country: China
Telephone: +86-25-52878232
Fax: +86-25-68897541

2.2. Manufacturer Information

Company Name: ZTE Corporation
Address /Post: #68 Zijin Hua Road, Nanjing, Jiangsu Province, P. R. China
City: Nan Jing
Postal Code: 210012
Country: China
Telephone: +86-25-52878232
Fax: +86-25-68897541

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	HSPA+Wireless Router
Model Name	MF25A
FCC ID	Q78-ZTEMF25A
Extreme vol. Limits	4.2VDC to 5.2VDC (nominal: 5.0VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT2	869842010003585	PCBMF25AV1.0.0	EN_ZTE_MF25AV1.0.0B03

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	DC power supply	/

AE1

Model	STC-A2O12015C55-A
Manufacturer	ZTE
Length of Cable	/

*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.2	EUT2+ AE1	/

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	10-1-11 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-2 (10 meters×6.7meters×6.1meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1Ω
Normalised site attenuation (NSA)	< ±3.5 dB, 3m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Fully-anechoic chamber FAC-3 (9 meters×6.5 meters×4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz

Control room/ conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:	
P	Pass
NA	Not applicable
F	Fail

Clause	List	Clause in FCC rules	Verdict
1	Radiated Emission	15.109(a)	P
2	Conducted Emission	15.107(a)	P

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	Test Receiver	ESU26	100376	R&S	2013-11-07
2	EMI Antenna	VULB 9163	9163-514	Schwarzbeck	2014-11-10
3	EMI Antenna	3117	00139065	ETS-Lindgren	2014-07-31
4	LISN	ESH2-Z5	829991/012	R&S	2013-04-16
5	Test Receiver	ESCI	100344	R&S	2013-03-28
6	Universal Radio Communication Tester	CMU200	102228	R&S	2013-07-07
7	Universal Radio Communication Tester	E5515C	MY48361083	Agilent	2013-03-16
8	Laptop	T400	R8-CMYVG	DELL	N/A

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission (§15.109(a))

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (connected with and without laptop) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode:

During the test the LAN port of EUT is connected to a laptop via a cat-5 UTP cable. A PING program is used to set up a communication link between EUT and laptop. Meanwhile the EUT is under GSM1900MHz idle mode and its WLAN function is switched off

A.1.3 Measurement Limit

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

A.1.4 Test Condition

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz IF Bandwidth	5
1000-4000	1MHz/1MHz	15

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Set.2

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dBuV)	Polarity
2995.200	42.3	-29.0	33.8	37.479	HORIZONTAL
2987.000	42.3	-29.0	33.8	37.479	HORIZONTAL
2992.200	42.3	-29.0	33.8	37.479	VERTICAL
2991.000	42.3	-29.0	33.8	37.479	HORIZONTAL
2989.400	42.3	-29.0	33.8	37.479	VERTICAL
2990.800	42.3	-29.0	33.8	37.479	HORIZONTAL

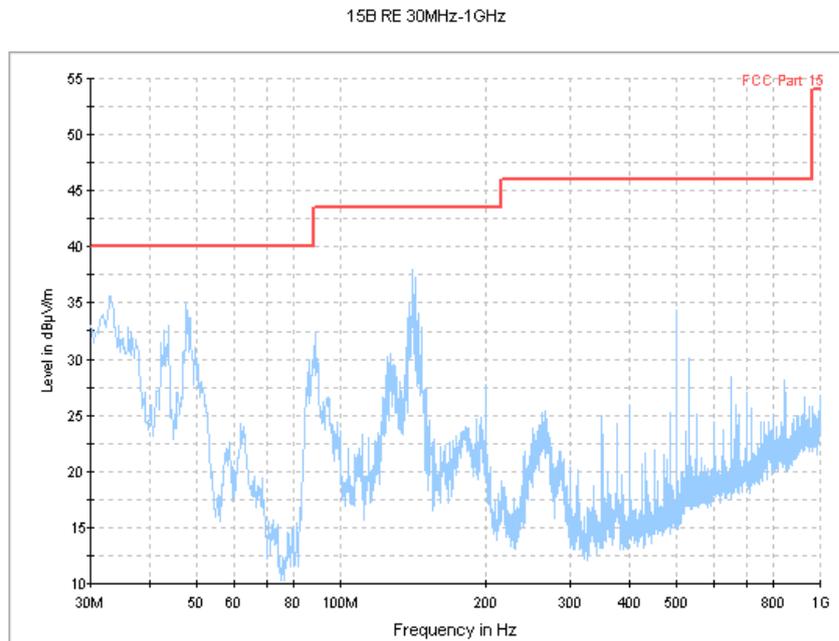


Figure A.1 Radiated Emission from 30MHz to 1GHz (Set.2)

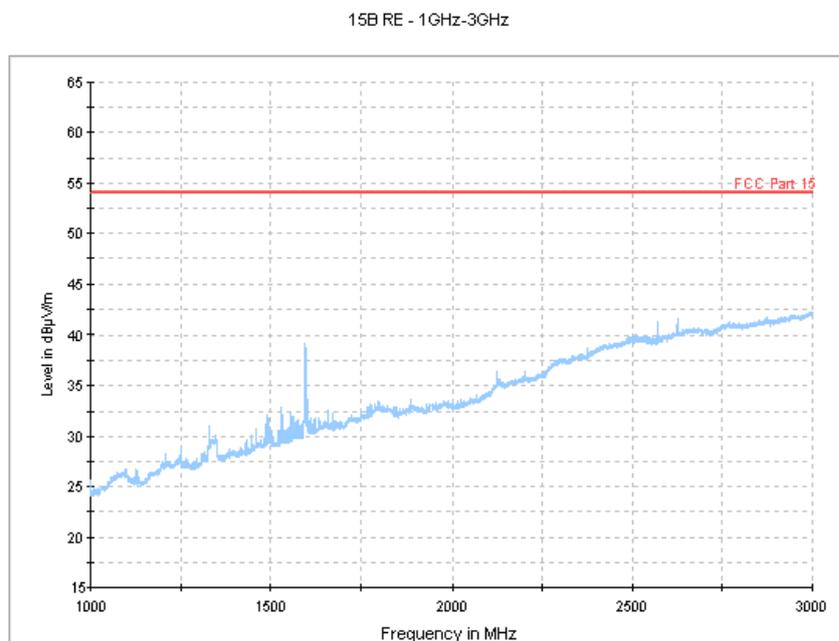


Figure A.2 Radiated Emission from 1GHz to 3GHz (Set.2)

15b RE - 3GHz-4GHz

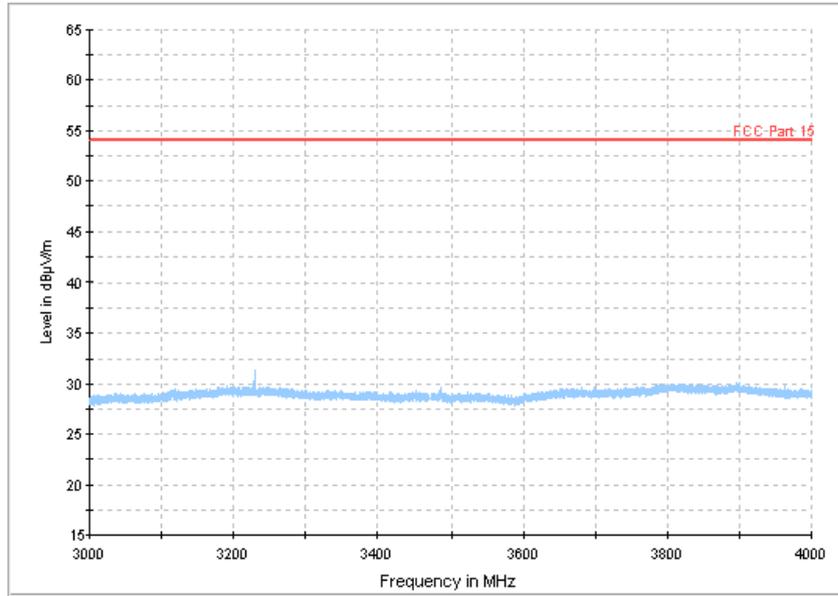


Figure A.3 Radiated Emission from 3GHz to 4GHz (Set.3)

A.2 Conducted Emission (§15.107(a))

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 7.2.

A.2.2 EUT Operating Mode:

During the test the LAN port of EUT is connected to a laptop via a cat-5 UTP cable. A PING program is used to set up a communication link between EUT and laptop. Meanwhile the EUT is under GSM1900MHz idle mode and its WLAN function is switched off

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

IF Bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

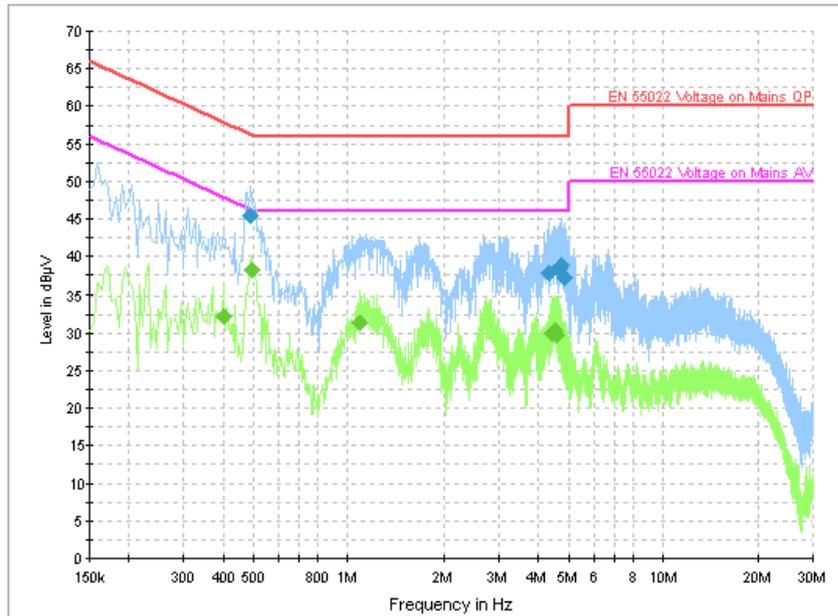


Figure A.4 Conducted Emission (Set.2)

Final Result 1

Frequency (MHz)	QuasiPeak (dB µV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB µV)
0.487500	45.4	GND	N	10.0	10.8	56.2
4.312500	37.8	GND	N	10.0	18.2	56.0
4.645500	38.3	GND	L1	10.0	17.7	56.0
4.677000	38.3	GND	L1	10.0	17.7	56.0
4.722000	38.9	GND	N	10.0	17.1	56.0
4.866000	37.1	GND	N	10.0	18.9	56.0

Final Result 2

Frequency (MHz)	Average (dB µV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB µV)
0.402000	32.2	GND	N	10.0	15.6	47.8
0.496500	38.2	GND	N	10.0	7.8	46.1
1.095000	31.5	GND	N	10.0	14.5	46.0
4.443000	29.9	GND	L1	10.0	16.1	46.0
4.546500	30.4	GND	N	10.0	15.6	46.0
4.573500	29.8	GND	L1	10.0	16.2	46.0

END OF REPORT