

TEST REPORT

Report No.: SRMC2007-H024-E0013

Product Name: HSDPA/UMTS/EDGE/GPRS/GSM

Express Data Card

Product Model: MF335

Manufacture: ZTE Corporation

Specification: FCC Part22, Part 24, Part 2, Part 15

FCC ID: Q78-ZTEMF335

The State Radio Monitoring Center, Equipment Testing Division

The State Radio Spectrum Monitoring and Testing Center

No.80 Beilishi Road Xicheng District Beijing, China

Tel: 86-10-68009202 Fax: 86-10-68009205

CONTENTS

1. General information	3
1.1 Notes of the test report	3
1.2 Information about the testing laboratory.....	3
1.3 Applicant's details	3
1.4 Manufacturer's details.....	3
1.5 Application details	4
1.6 Reference specification.....	4
1.7 Information of EUT	4
1.7.1 General information.....	4
1.7.2 EUT details	5
1.7.3 Auxiliary equipment details.....	5
2. Test information:	6
2.1 Summary of the test results:	6
2.2.1 HSDPA/WCDMA:	7
2.2.1.1 RF Power Output –FCC Part2.1046.....	7
2.2.1.2 Effective Radiated Power-FCC Part22.913.....	9
2.2.1.3 Occupied Bandwidth-FCC Part2.1049.....	11
2.2.1.4 Spurious Emissions at antenna terminals-FCC Part2.1051/22.917	15
2.2.1.5 Band Edges Compliance-FCC Part2.1051/22.917	18
2.2.1.6 Frequency Stability-FCC Part2.1055/Part22.355	21
2.2.1.7 Radiated Spurious Emissions-FCC Part2.1053/22.917	23
2.2.1.8 Radiated Emissions-FCC Part15.109	29
2.2.2 EDGE/GPRS/GSM.....	31
2.2.2.1 RF Power Output –FCC Part2.1046.....	31
2.2.2.2 Effective Isotropic Radiated Power-FCC Part24.232.....	33
2.2.2.3 Occupied Bandwidth-FCC Part2.1049.....	35
2.2.2.4 Spurious Emissions at antenna terminals-FCC Part2.1051/24.238	39
2.2.2.5 Band Edges Compliance- FCC Part2.1051/24.238	43
2.2.2.6 Frequency Stability-FCC Part2.1055/Part24.235	46
2.2.2.7 Radiated Spurious Emissions-FCC Part2.1053/24.238	48
2.2.2.8 Radiated Emissions -FCC Part15.109	53
2.3. List of test equipments	55
Appendix.....	56

1. General information

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio Monitoring Center.

The test results relate only to individual items of the samples which have been tested.

1.2 Information about the testing laboratory

Company: The State Radio Monitoring Center, Equipment Testing Division
The State Radio Spectrum Monitoring and Testing Center
Address: No.80 Beilishi Road, Xicheng District, Beijing China
City: Beijing
Country or Region: China
Contacted person: Wang Junfeng
Tel +86 10 68009181 +86 10 68009202
Fax: +86 10 68009195 +86 10 68009205
Email: Wangjf@srrc.org.cn

1.3 Applicant's details

Company: ZTE Corporation
Address: Zhongxing Bldg, High-Tech Park, Nan Shan, ShenZhen
City: ShenZhen City, GuangDong
Country or Region: P.R.China
Grantee Code: Q78
Contacted person: Tian li
Tel: +86 029-88723944
Fax: +86 029-88723529
Email: tian.li3@zte.com.cn

1.4 Manufacturer's details

Company: ZTE Corporation
Address: Zhongxing Bldg, High-Tech Park, Nan Shan, ShenZhen
City: ShenZhen City, GuangDong
Country or Region: P.R.China
Grantee Code: Q78
Contacted person: Tian li
Tel: +86 029-88723944
Fax: +86 029-88723529
Email: tian.li3@zte.com.cn

1.5 Application details

Date of receipt of application: 25th Sep. 2007
Date of receipt of test sample: 25th Sep. 2007
Date of test: 25th Sep 2007 to 22th Oct. 2007

1.6 Reference specification

FCC Part22, Part 24, Part 2, Part 15

1.7 Information of EUT

1.7.1 General information

Name of EUT	HSDPA/UMTS/EDGE/GPRS/GSM Express Data Card
FCC ID	Q78-ZTEMF335
Frequency range	HSDPA/UMTS: Tx:824~849MHz Rx:869~894MHz EDGE/GPRS/GSM: Tx:1850~1910MHz Rx:1930~1990MHz
Rated output power	HSDPA/UMTS:24.0dBm EDGE/GPRS/GSM:30.0dBm
Modulation type	GPRS/GSM:GMSK EDGE:8PSK UMTS:QPSK HSDPA:16QAM
Duplex mode	FDD
Duplex spacing:	HSDPA/UMTS:45MHz EDGE/GPRS/GSM:80MHz
Antenna type	Integral
Power Supply	EXPRESS card port of notebook
Rated Power Supply Voltage	3.3V
Extreme Temperature	-10°C~+50°C

1.7.2 EUT details

Name	Model	IMEI
HSDPA/UMTS/EDGE/GPRS/GSM Express Data Card	MF335	355617010003670

1.7.3 Auxiliary equipment details


Equipment	notebook
Manufacturer	IBM
Model Number	2672-AEC

Equipment	DUELADAPTER CRADLE
Manufacturer	DUEL
Patent Numbers	5490891,5397857

2. Test information:

2.1 Summary of the test results:

No.	Test case	FCC reference	Verdict
1	RF Power Output	2.1046	Pass
2	Effective Isotropic Radiated Power	22.913/24.232	Pass
3	Occupied Bandwidth,	2.1049	Pass
4	Spurious Emissions at antenna terminals	2.1051/22.917/24.238	Pass
5	Band Edges Compliance	2.1051/22.917/24.238	Pass
6	Frequency Stability	2.1055/24.235/22.355	Pass
7	Radiated Spurious Emissions	2.1053/22.917/24.238	Pass
8	Conducted emissions	15.107	N/A
9	Radiated emissions	15.109	Pass

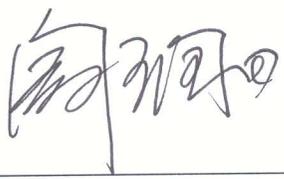This Test Report Is Issued by: 	Checked by: 
Tested by: 	Issued date: 2007.10.30

2.2 Test result


2.2.1 HSDPA/WCDMA:

2.2.1.1 RF Power Output –FCC Part2.1046

Ambient condition:

Temperature	Relative humidity	Pressure
24°C	55%	101.0kPa

Test Setup:

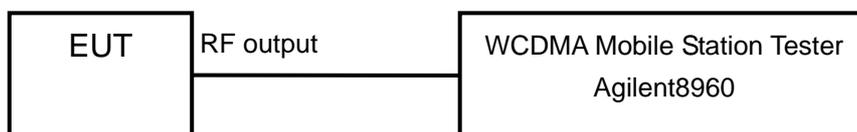

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels No4132, No4182 and No4233 (Bottom, middle and top channels of WCDMA band)

Limits	$\leq 24\text{dBm}$
--------	---------------------

Test result:

WCDMA MODE:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
826.4	4132	23.0
836.4	4182	22.9
846.6	4233	22.5

HSDPA MODE:


Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
826.4	4132	22.7
836.4	4182	22.6
846.6	4233	22.2

2.2.1.2 Effective Radiated Power-FCC Part22.913


Ambient condition:

Temperature	Relative humidity	Pressure
24°C	55%	101.0kPa

Test setup

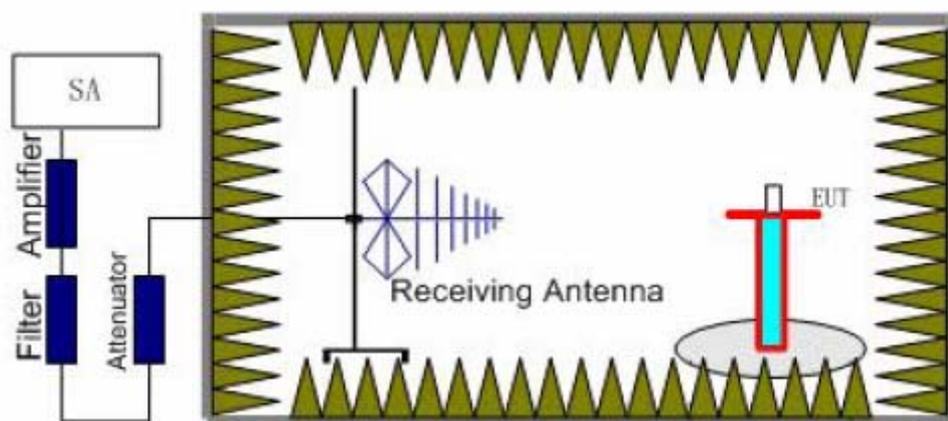

Step 1

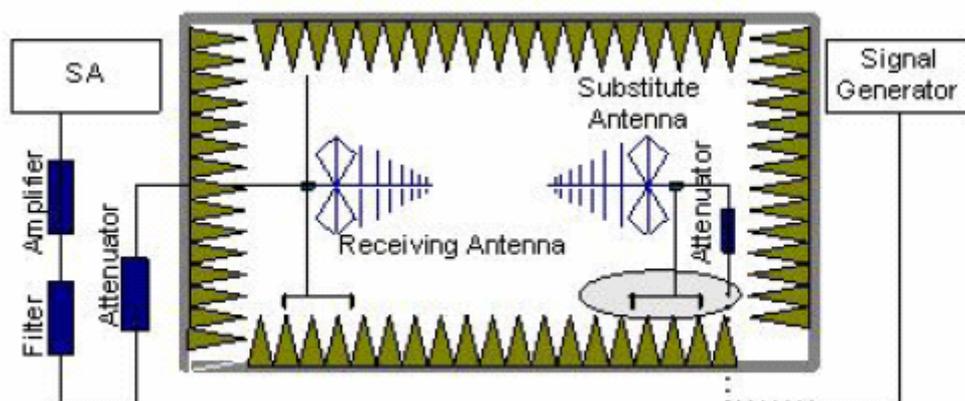

Step 2

Test procedure:

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be

established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A RMS detector is used and RBW is set to 3MHz. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver.

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator. To repeat the same procedure as step1 and the level of signal generator will be adjusted till the same power value on the spectrum analyzer or receiver. The ERP/EIRP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

The measurement will be conducted at three channels No4132, No4182 and No4233 (Bottom, middle and top channels of WCDMA band)

Limits	$\leq 38.5\text{dBm}$
--------	-----------------------

Test result:

WCDMA MODE:

Carrier frequency (MHz)	Channel No.	E.R.P. (dBm)
826.4	4132	25.4
836.4	4182	25.8
846.6	4233	25.8

HSDPA MODE:


Carrier frequency (MHz)	Channel No.	E.R.P. (dBm)
826.4	4132	25.7
836.4	4182	24.9
846.6	4233	25.5

2.2.1.3 Occupied Bandwidth-FCC Part2.1049

Ambient condition:

Temperature	Relative humidity	Pressure
24°C	55%	101.0kPa

Test Setup:

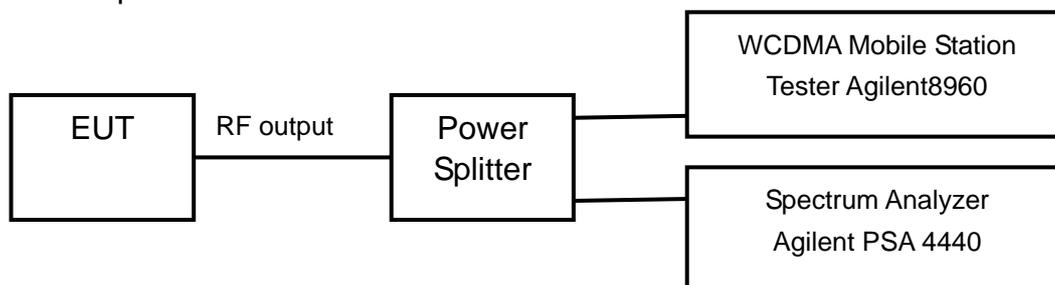

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 51kHz on spectrum analyzer. The bandwidth of 99% power can be read on spectrum analyzer. The measurement will be conducted at one channel No4182 .

Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:


WCDMA MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (MHz)
826.4	4132	4.13
836.4	4182	4.14
846.6	4233	4.16


HSDPA MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (MHz)
826.4	4132	4.12
836.4	4182	4.14
846.6	4233	4.14


WCDMA MODE:

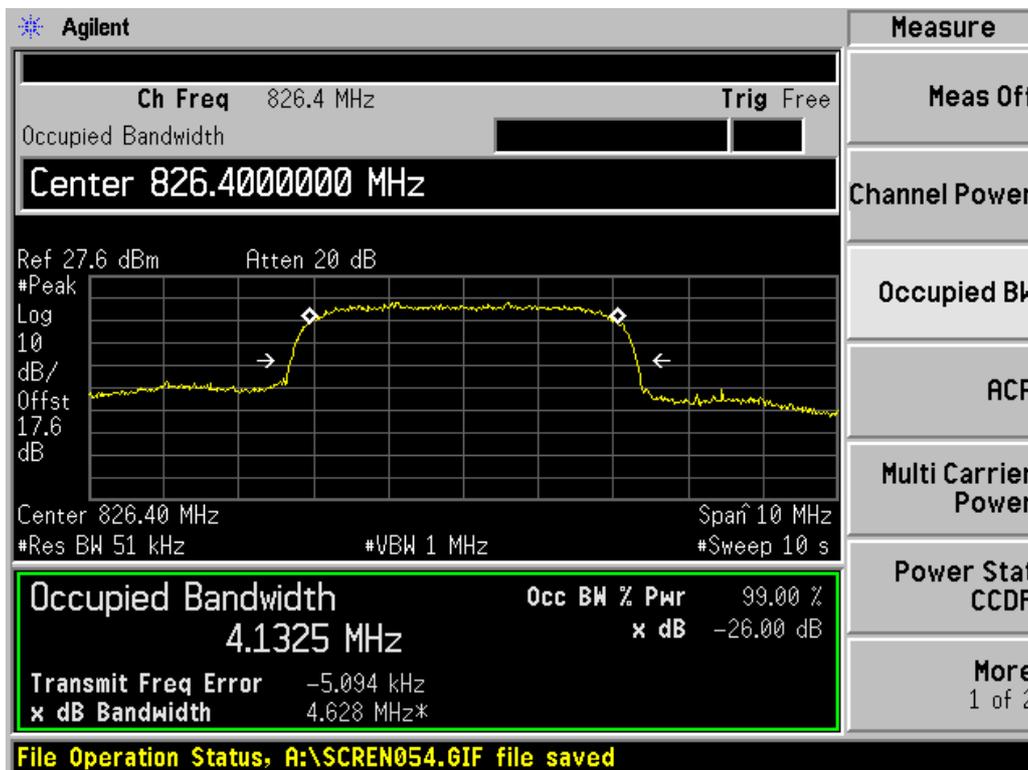

Channel 4132

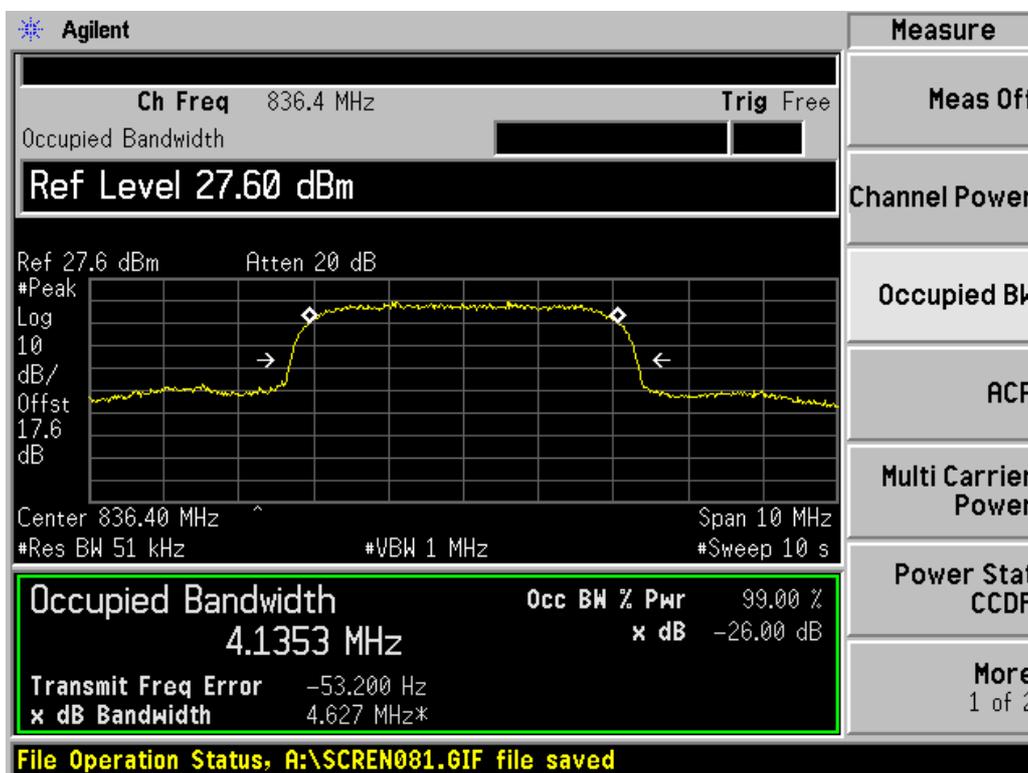


Channel 4182

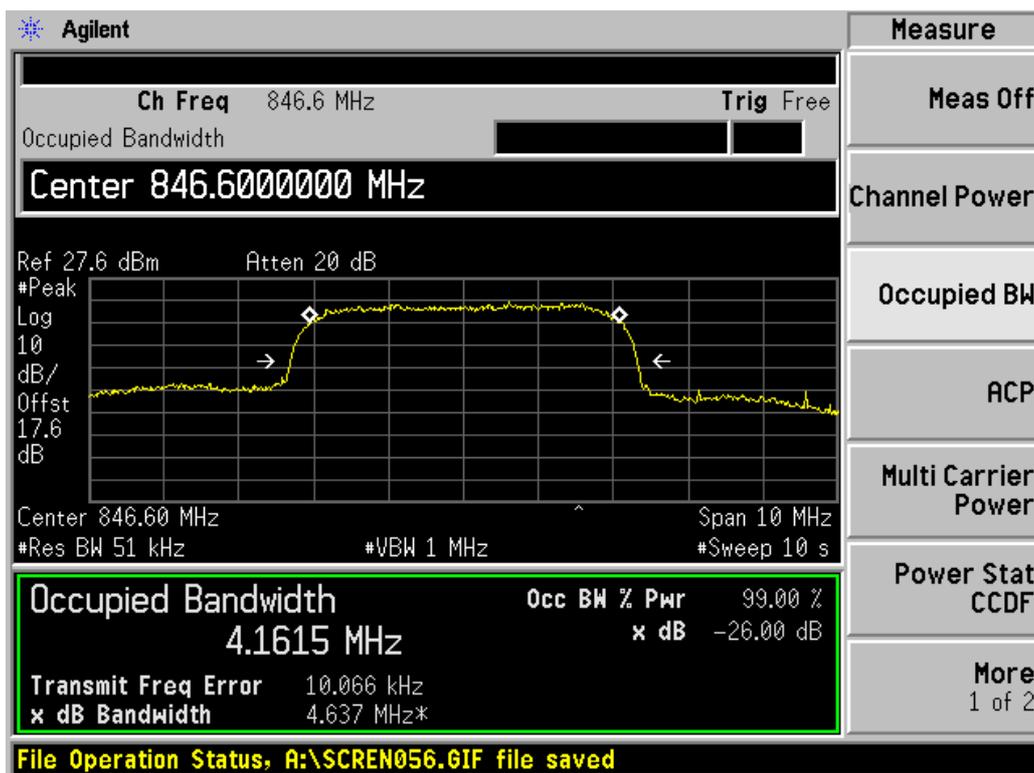


Channel 4233


HSDPA MODE:

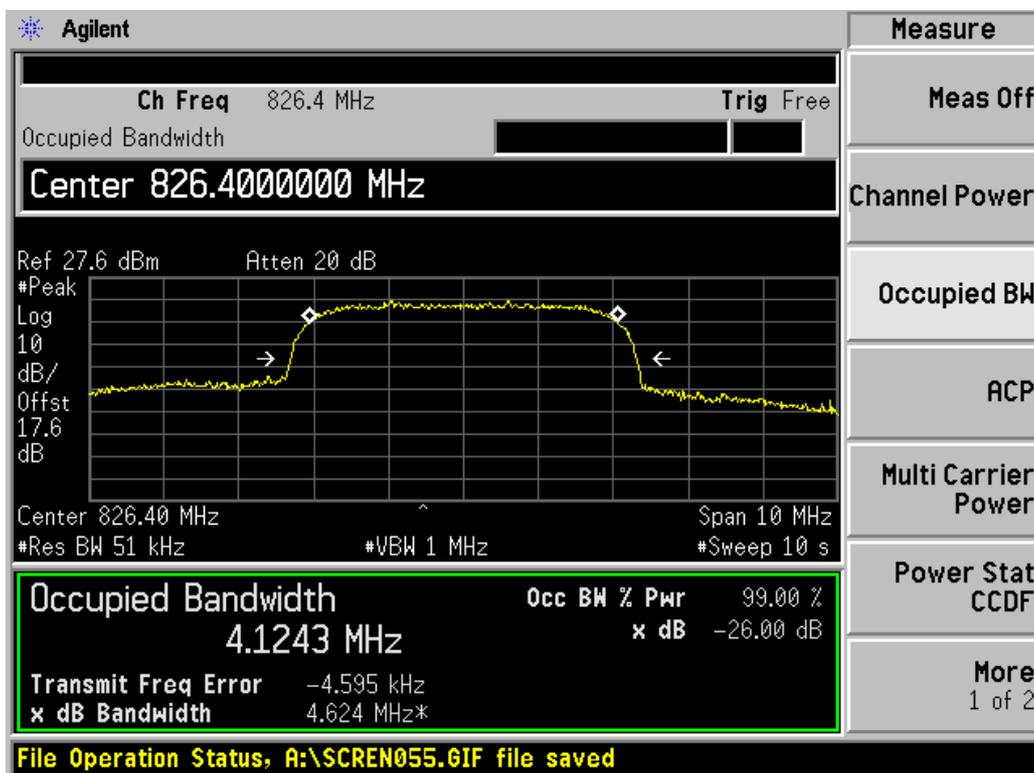

Channel 4132

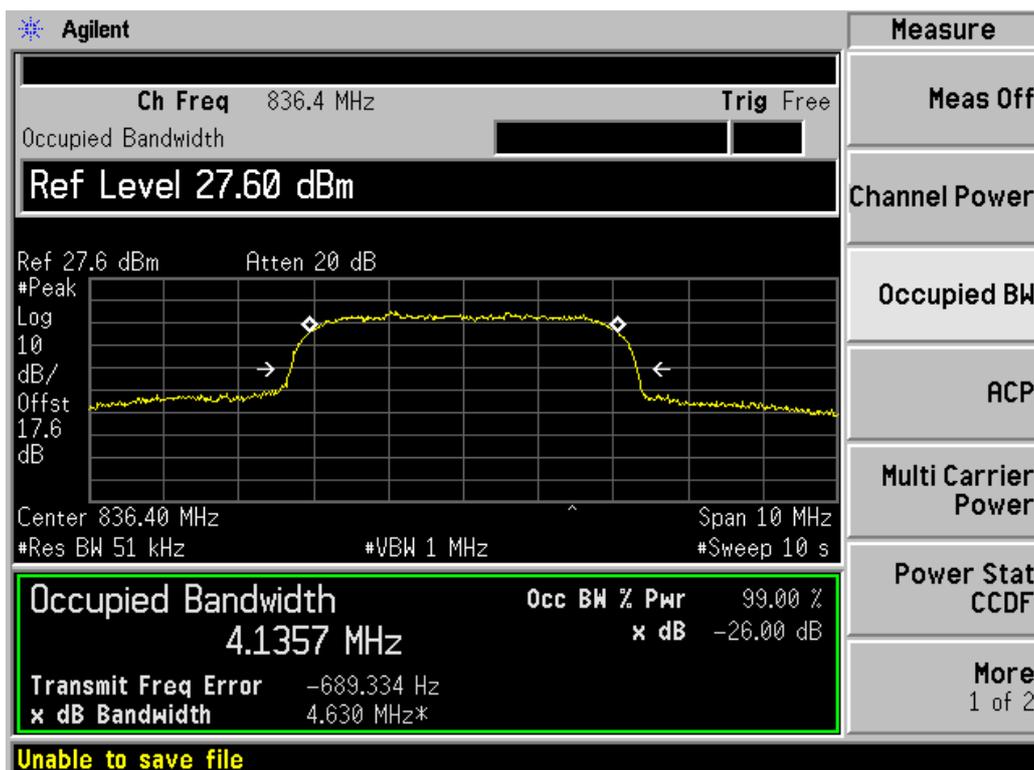

Channel 4182

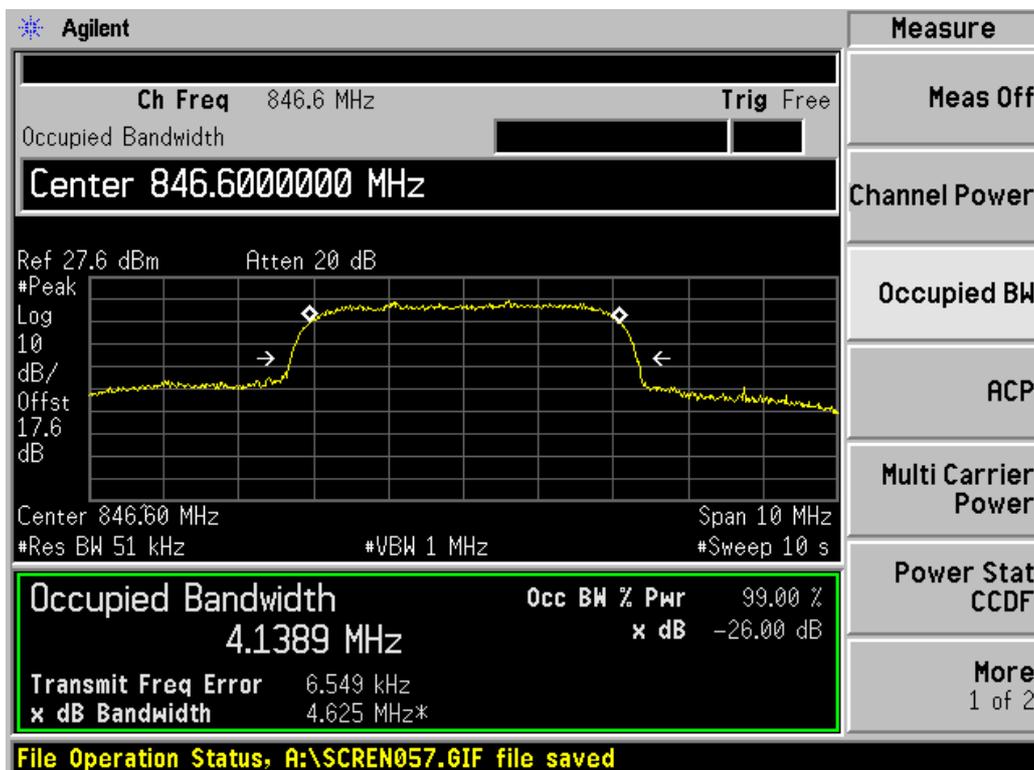


Channel 4233

2.2.1.4 Spurious Emissions at antenna terminals-FCC Part2.1051/22.917

Ambient condition:

Temperature	Relative humidity	Pressure
24°C	55%	101.0kPa

Test Setup:

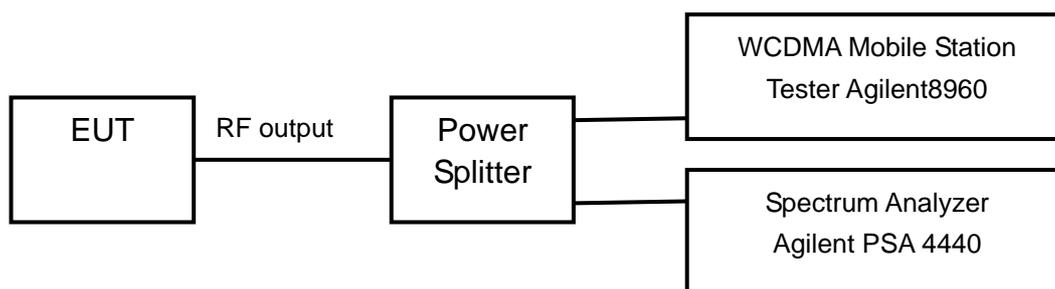

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10th harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer.


The measurement will be conducted at one channel No4182

Limits	≤ -13dBm
--------	----------


Test result:

Refer to the following figures.

WCDMA MODE:

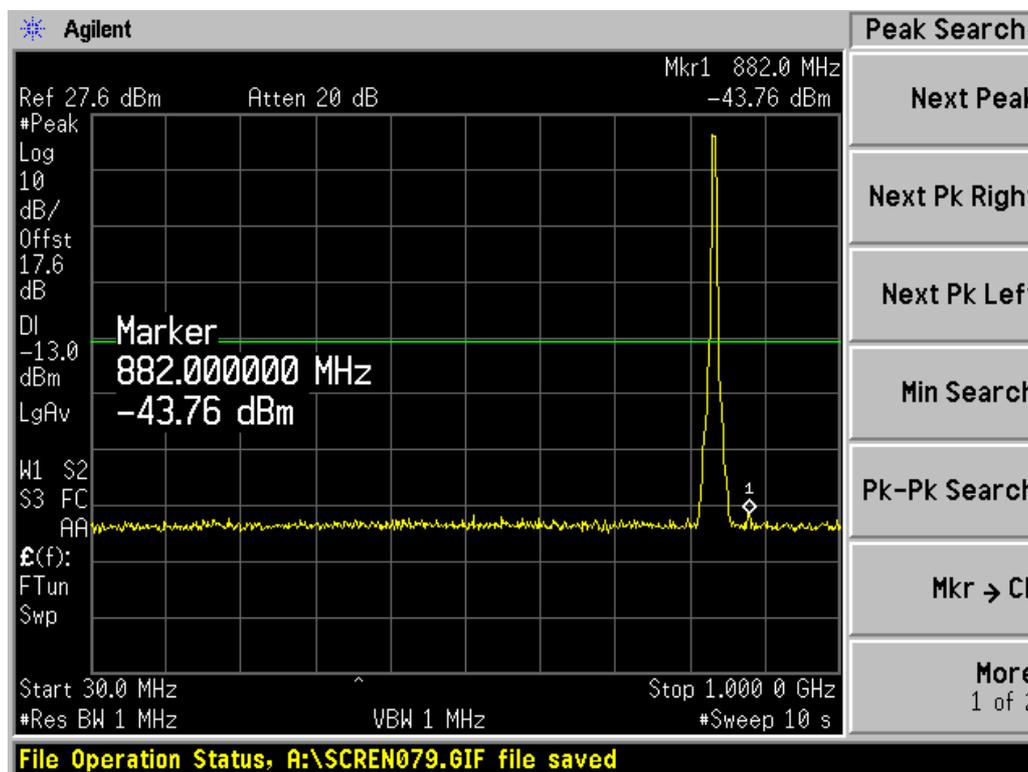


Channel 4182, 30MHz~1GHz

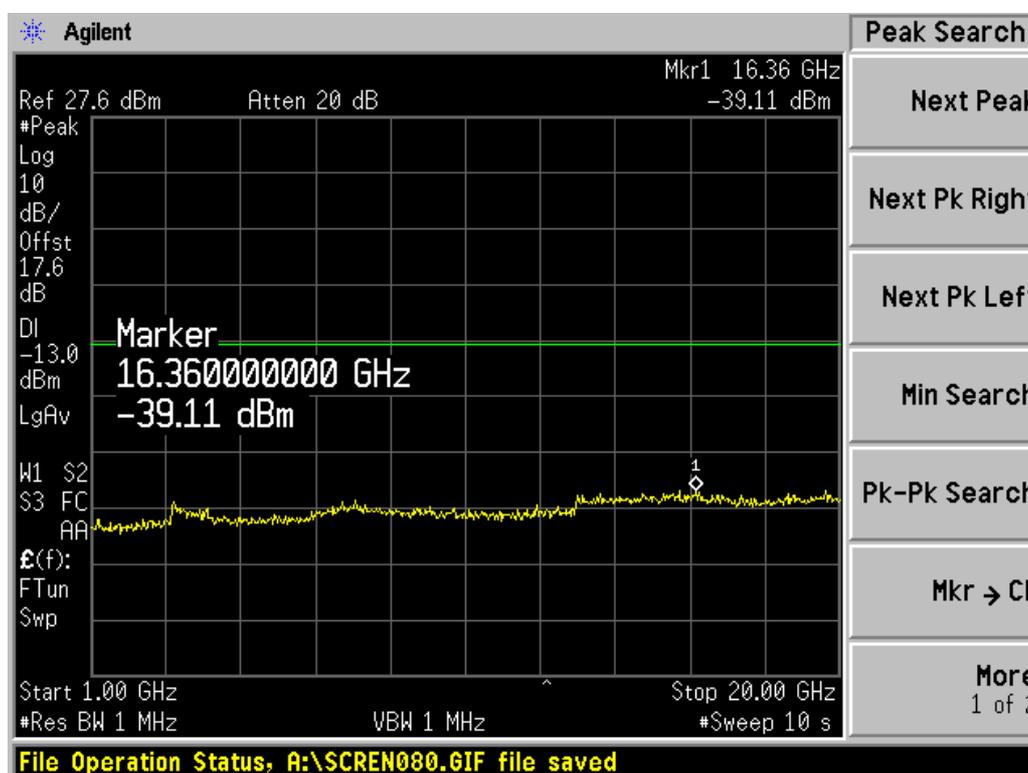


Channel 4182, 1GHz~20GHz

Note: The signal beyond the limit is carrier.

HSDPA MODE:

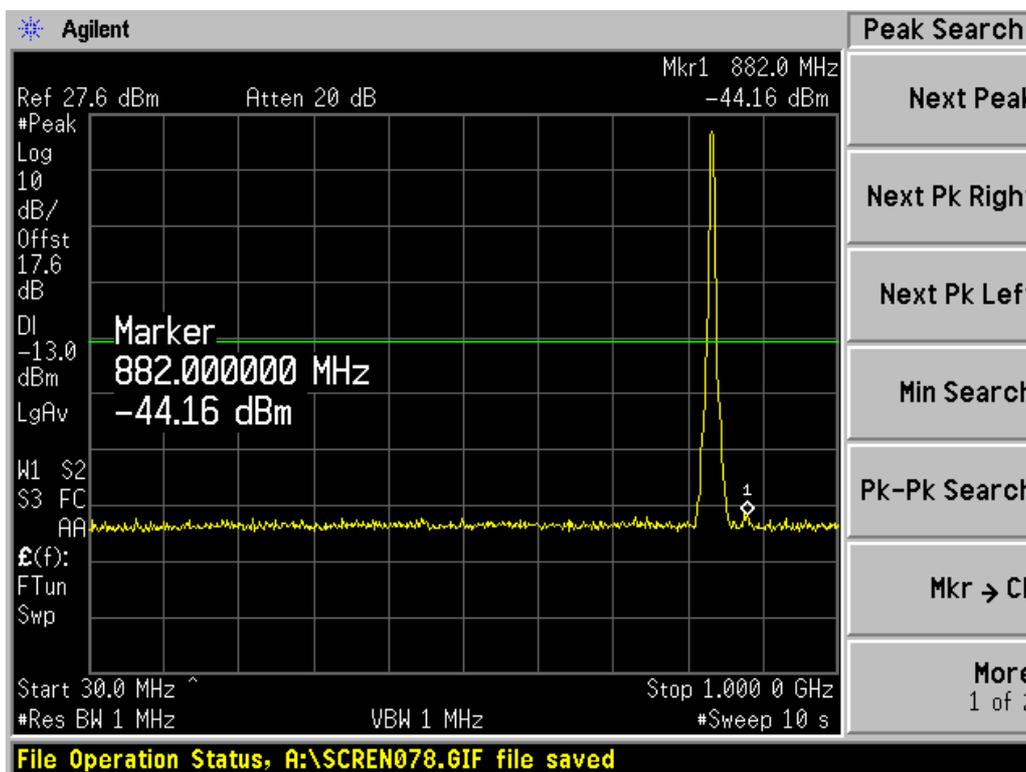

Channel 4182, 30MHz~1GHz

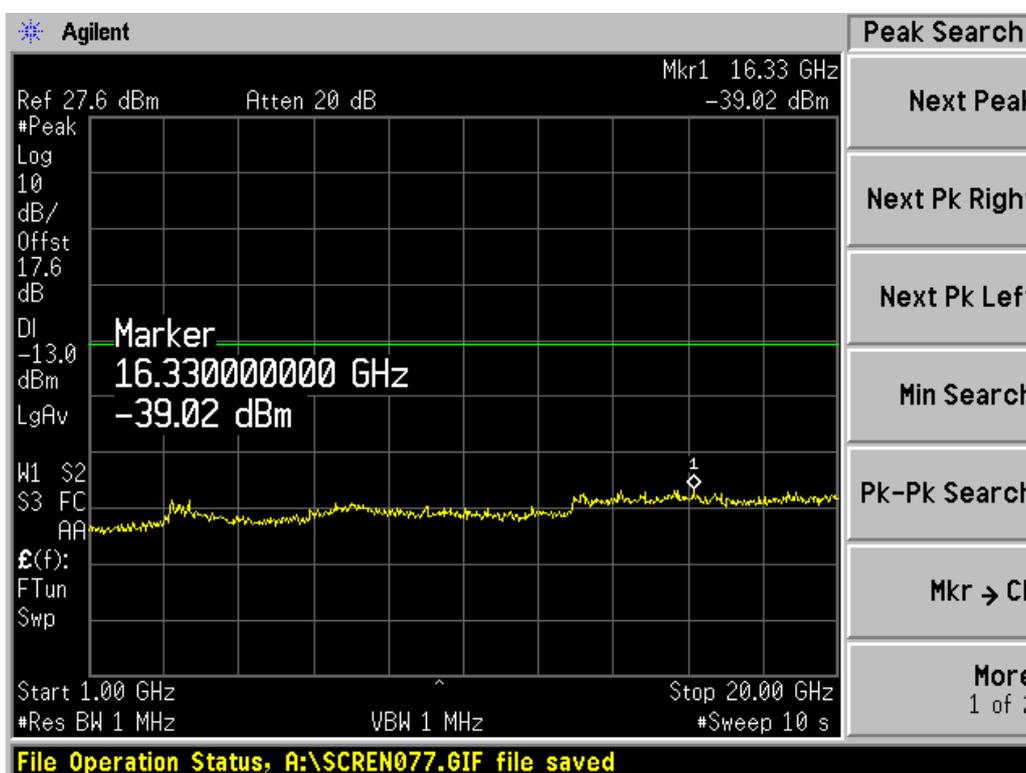

Channel 4182, 1GHz~20GHz


Note: The signal beyond the limit is carrier.

2.2.1.5 Band Edges Compliance-FCC Part2.1051/22.917

Ambient condition:

Temperature	Relative humidity	Pressure
24°C	55%	101.0kPa

Test Setup:

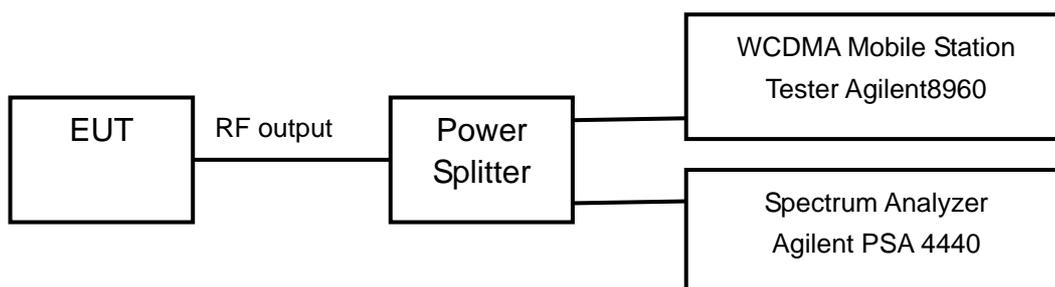

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The peak detector is used and RBW is set to 51kHz on spectrum analyzer.


The measurement will be conducted at two channels No4132 and No4233(Bottom and top channels of WCDMA band)

Limits	≤ -13dBm
--------	----------


Test result:

Refer to the following figures.

WCDMA MODE:

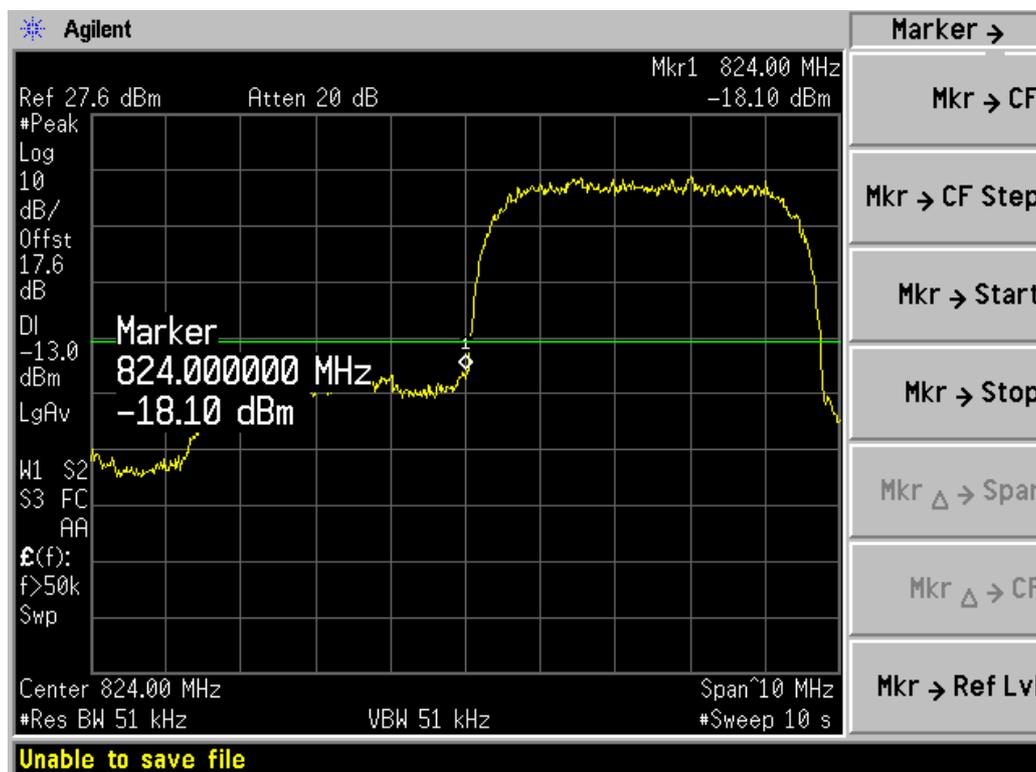


Channel 4132

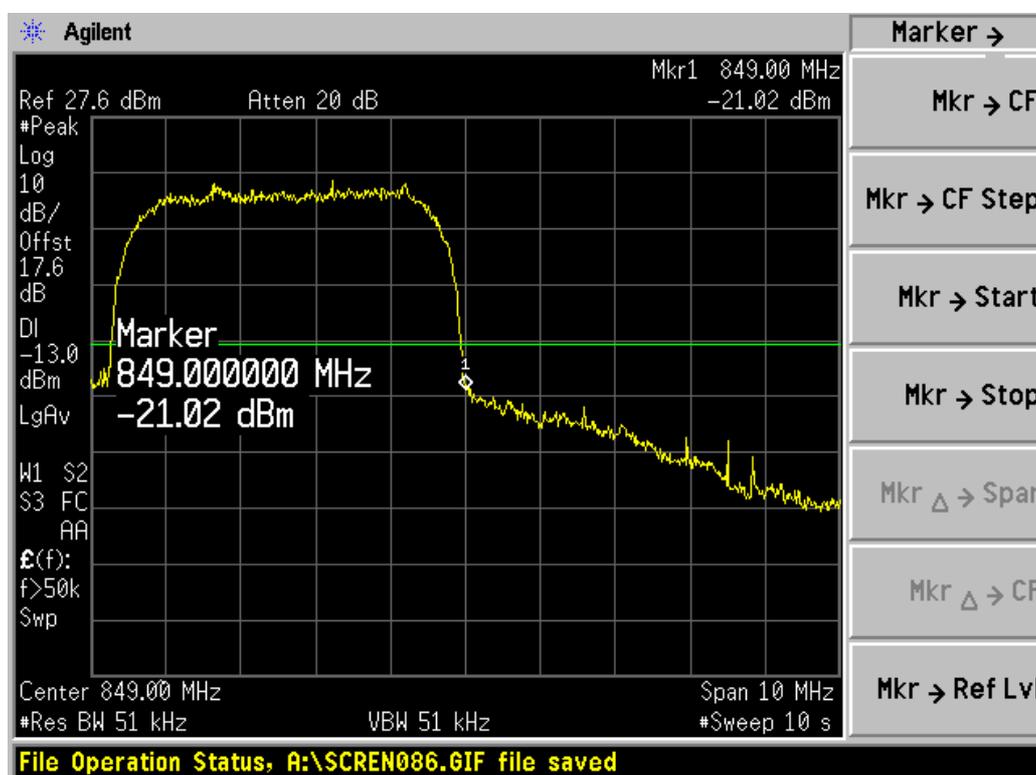


Channel 4233

HSDPA MODE:

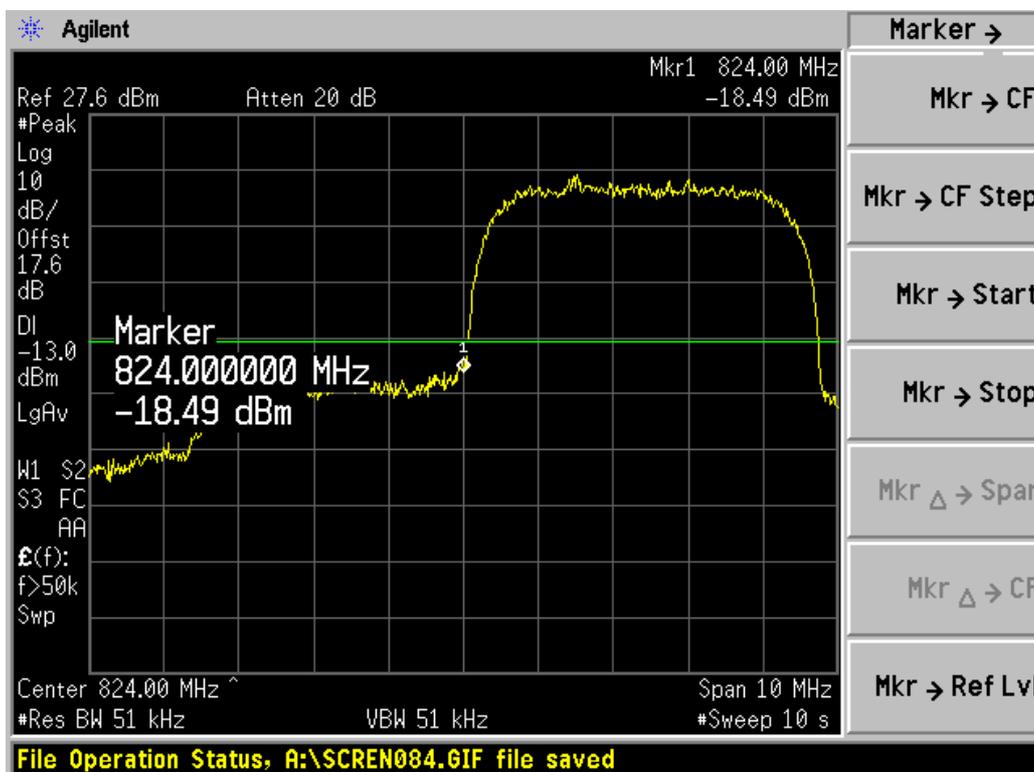

Channel 4132

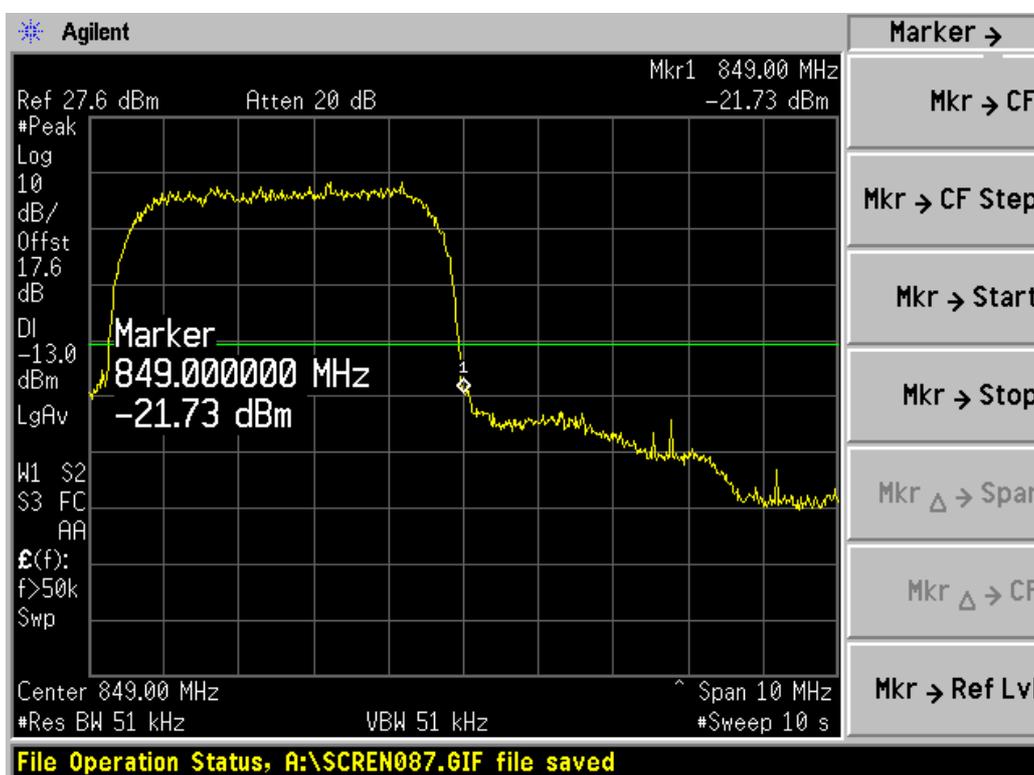


Channel 4233

2.2.1.6 Frequency Stability-FCC Part2.1055/Part22.355

Ambient condition:

Temperature	Relative humidity	Pressure
24°C	55%	101.0kPa

Test setup:

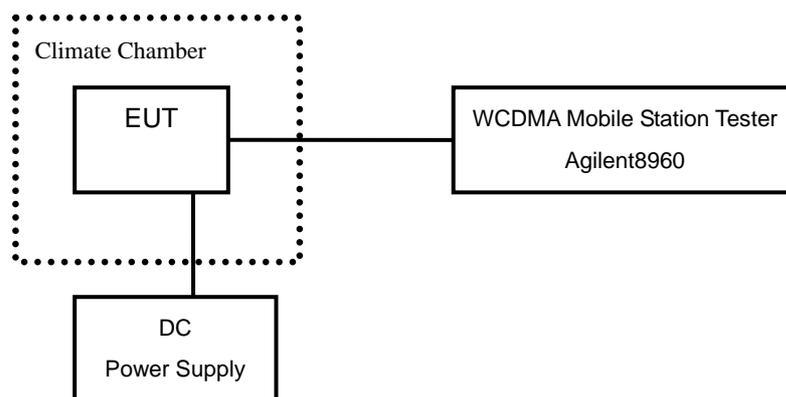

Test Procedure:

A radio link shall be established between EUT and Tester. The tester will sample the transmitter RF output signal and measure its frequency. The temperature inside the climate chamber is varied from -10 to +50° C in 10° C step size.

Limits: No specific frequency stability requirements in part 2.1055 and part 22.355

Test Result:

WCDMA MODE:

Temperature(° C)	Test Result (ppm)		
	Channel 4132	Channel 4182	Channel 4233
-10	---	0.004	---
0	---	0.006	---
+10	---	0.005	---
+20	---	0.004	---
+30	---	0.004	---
+40	---	0.006	---
+50	---	0.004	---

HSDPA MODE:


Temperature(° C)	Test Result (ppm)		
	Channel 4132	Channel 4182	Channel 4233
-10	---	0.005	---
0	---	0.001	---
+10	---	0.003	---
+20	---	0.005	---
+30	---	0.007	---
+40	---	0.003	---
+50	---	0.001	---

2.2.1.7 Radiated Spurious Emissions-FCC Part2.1053/22.917


Ambient condition

Temperature	Relative humidity	Pressure
24°C	55%	101.0kPa

Test Setup:

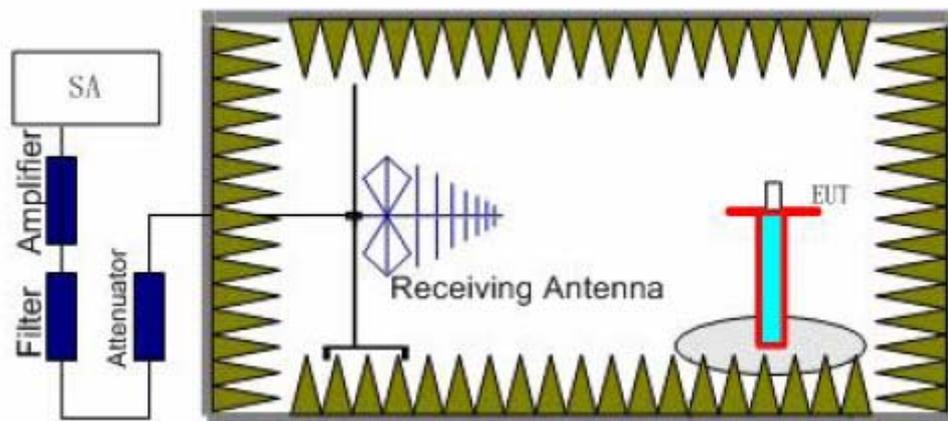

Step 1

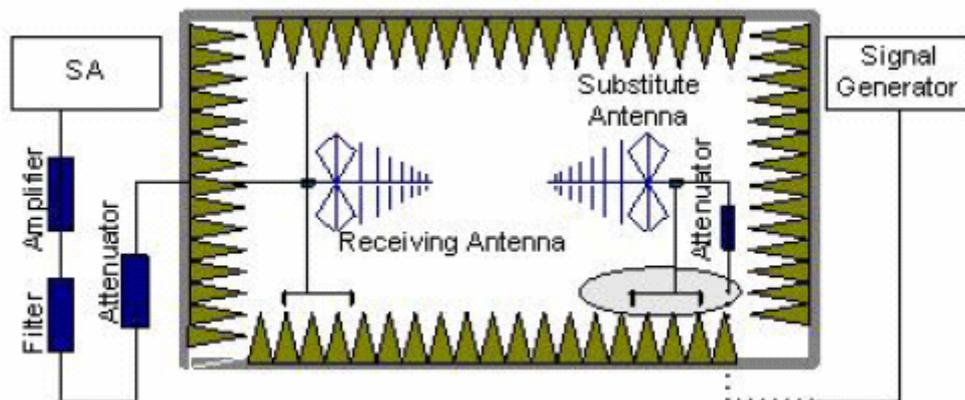

Step 2

Test procedure:

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meter high non-conductive table at a 3 meter test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be

established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10th harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

Calculation procedure:

The data of cable loss, antenna gain and air loss has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss, antenna gain and air loss. The basic equation with a sample calculation is as followed:

$$P=P_R+L_C+L_A-G$$

Where

P: Power of the Radiated Spurious Emissions (dBm)

P_R: reading of the receiver (dBm)

L_C: Cable Lose (dB)

L_A: Air loss (dB)

G: Antenna Gain (dBi)

Assumed the reading of the receiver is -60dBm. A cable lose of 10dB, an air lose of 30dB and an antenna gain of 11dBi are added.

$$P=P_R+L_C+L_A-G=-60+10+30-11=-31dBm$$


The measurement will be conducted at one channel No4182 .

Test result:

Refer to the following figures.


Limits	≤ -13dBm
--------	----------

WCDMA MODE:

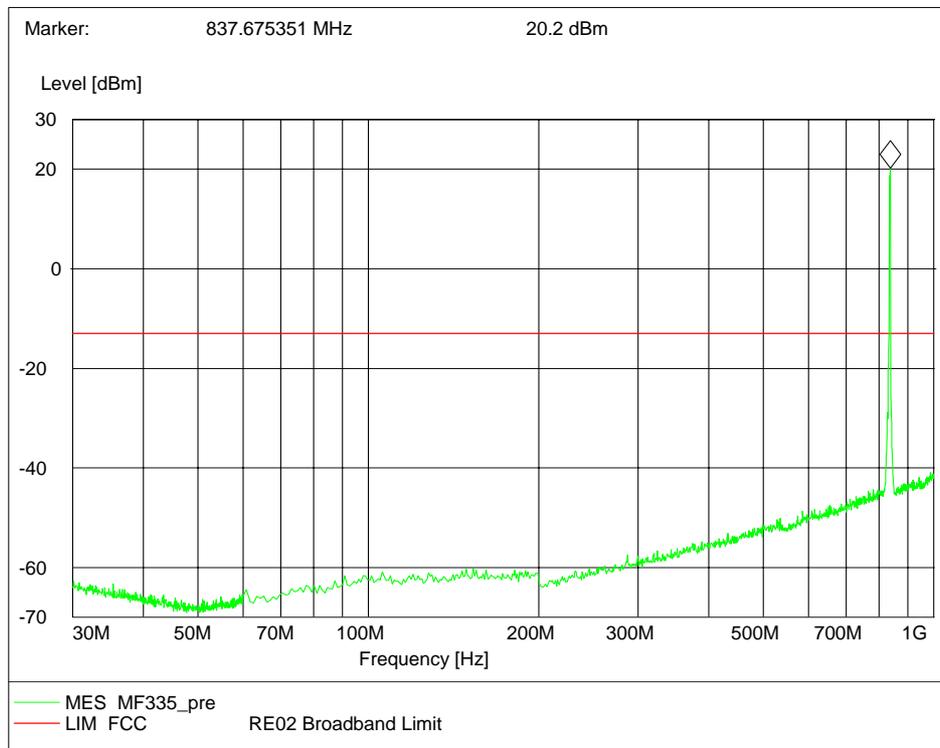


Channel 4182, 30MHz~1GHz (Traffic Mode)

Note: The signal beyond the limit is carrier.

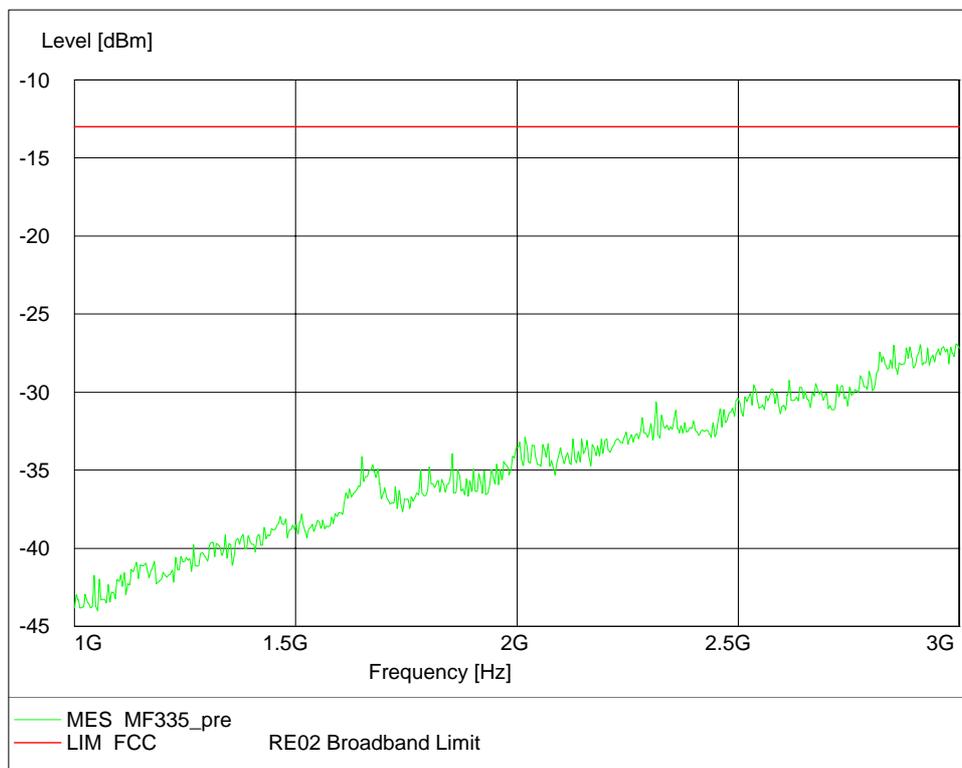


Channel 4182, 1GHz~3GHz (Traffic Mode)

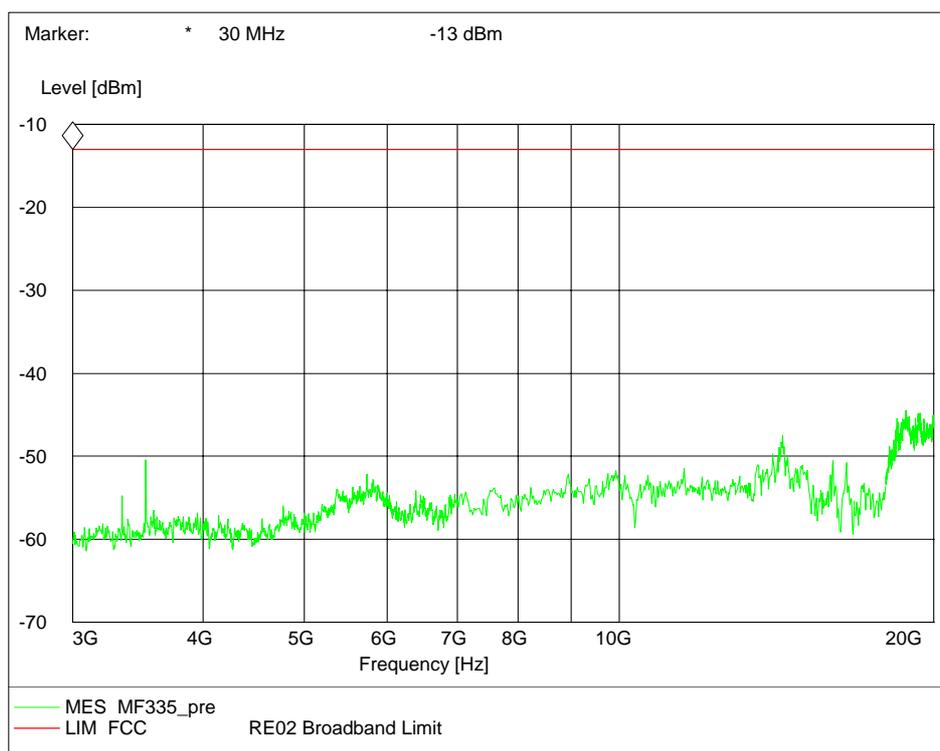


Channel 4182, 3GHz~20GHz (Traffic Mode)

HSDPA MODE:

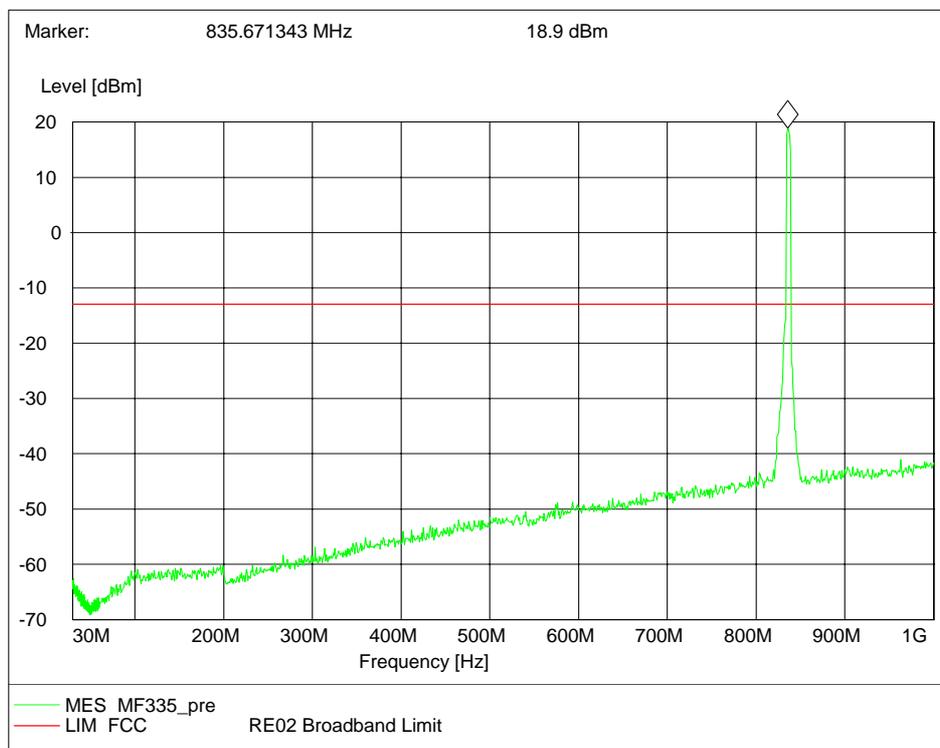


Channel 4182, 30MHz~1GHz (Traffic Mode)


Note: The signal beyond the limit is carrier.

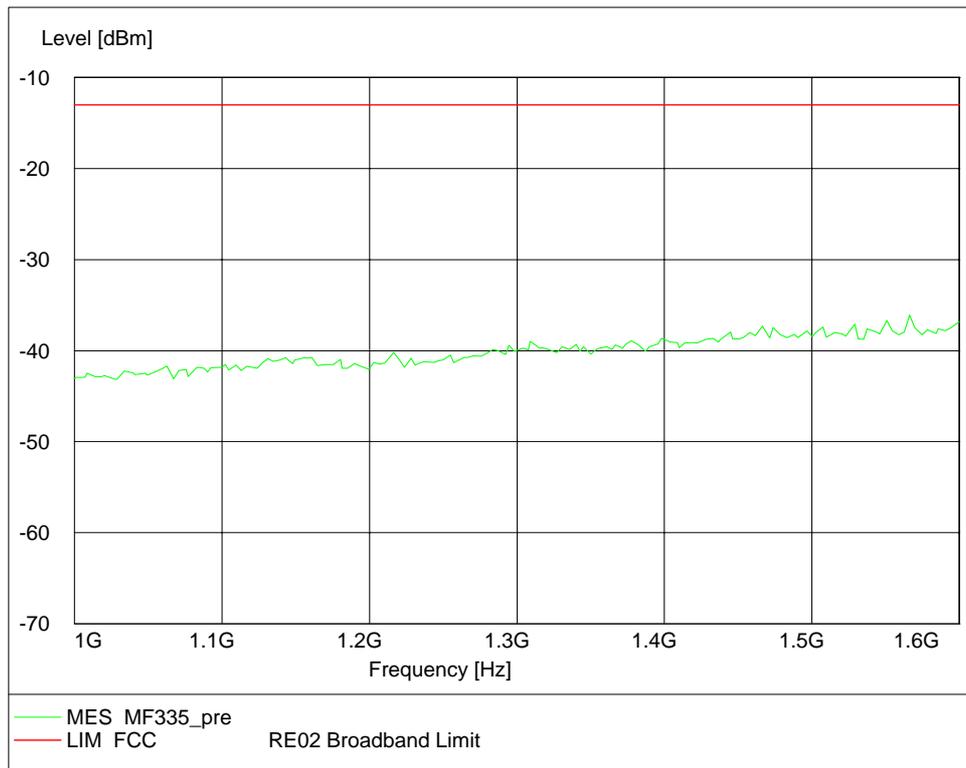

Channel 4182, 1GHz~1.6GHz (Traffic Mode)

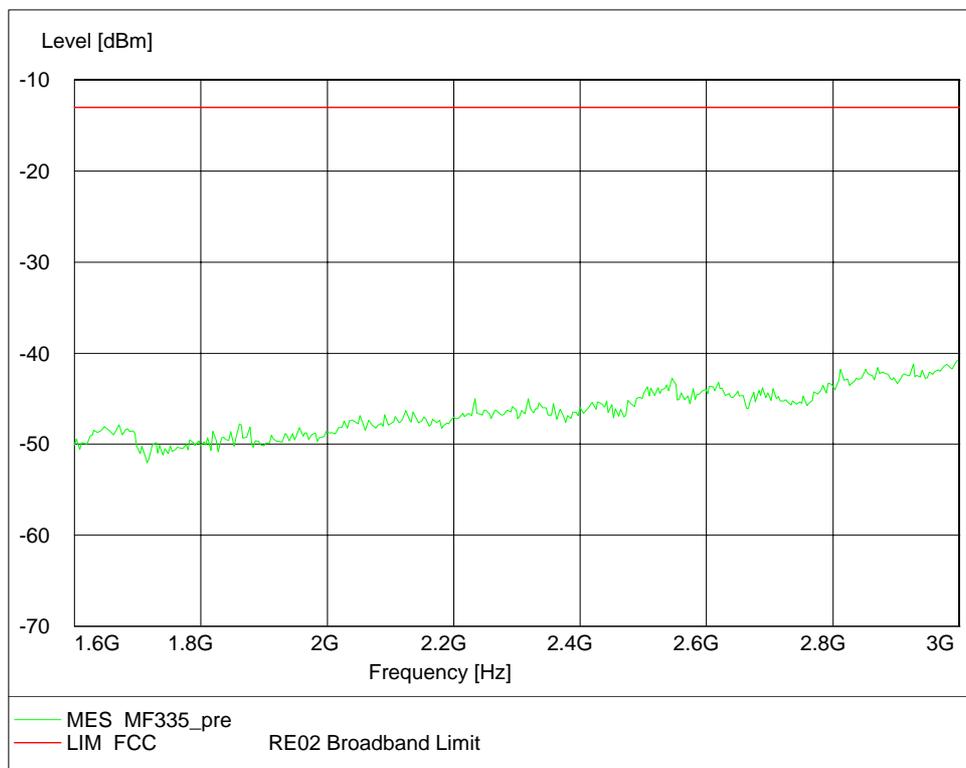

Channel 4182, 1.6GHz~3GHz (Traffic Mode)

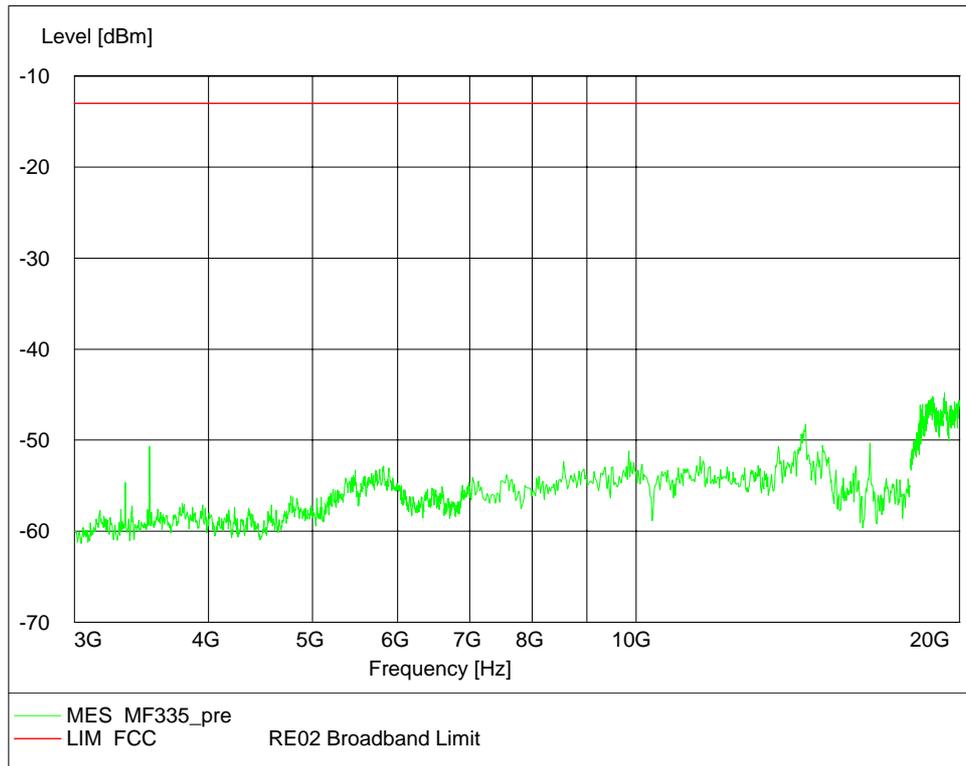


Channel 4182, 3GHz~20GHz (Traffic Mode)

2.2.1.8 Radiated Emissions-FCC Part15.109

Ambient condition:

Temperature	Relative humidity	Pressure
24°C	55%	101.0kPa

Test Setup:

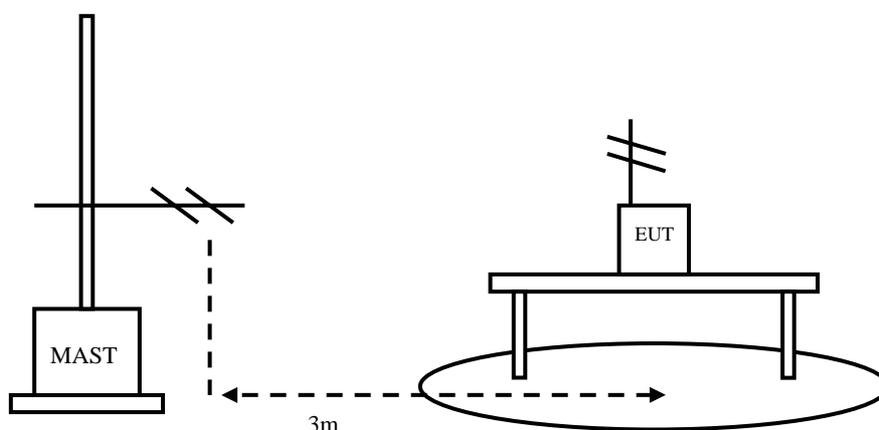

Test Procedure:

The EUT and receive antenna shall be placed to SAC (semi anechoic chamber) upon a non-metallic turn table. The receive antennas shall be moved from 1 to 4 meters. The distance between equipment and receive antenna shall be 3 meters.

Testing shall operate the EUT in idle modes of operation and cable positions in a test set-up which is representative of typical system configurations, as declared by the manufacturer. The output port shall be terminated with 50 ohms.

Then start the test software ES-K1. Sweep the whole frequency band through the range from 30MHz to 1GHz, using receive log period antenna HL562.


During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Frequency of Emission(MHz)	Limits	
	Unit($\mu\text{V/m}$)	Average($\text{dB}\mu\text{V/m}$)
30~88	100	40
88~216	150	43.5
216~960	200	46
960~1000	500	54

Test result:

Refer to the following figures.

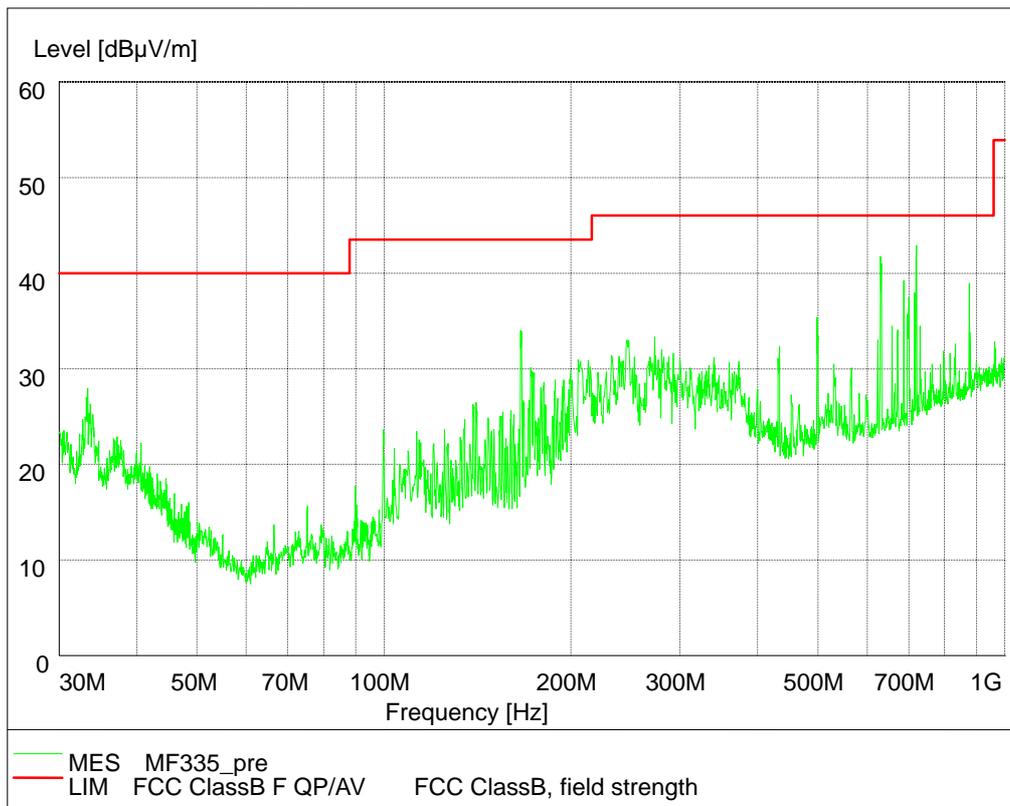


2.2.2 EDGE/GPRS/GSM

2.2.2.1 RF Power Output –FCC Part2.1046

Ambient condition:

Temperature	Relative humidity	Pressure
24°C	55%	101.0kPa

Test Setup:

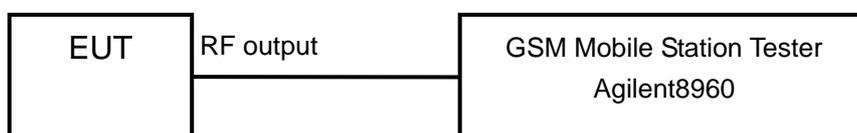

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels No512, No661 and No810 (Bottom, middle and top channels of PCS1900 band)

Limits	$\leq 30\text{dBm}$
--------	---------------------

Test result:

GSM/GPRS MODE:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1850.2	512	28.9
1880.0	661	29.3
1909.8	810	29.5

EDGE MODE:


Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1850.2	512	24.9
1880.0	661	25.3
1909.8	810	25.4

2.2.2.2 Effective Isotropic Radiated Power-FCC Part24.232


Ambient condition:

Temperature	Relative humidity	Pressure
24°C	55%	101.0kPa

Test setup

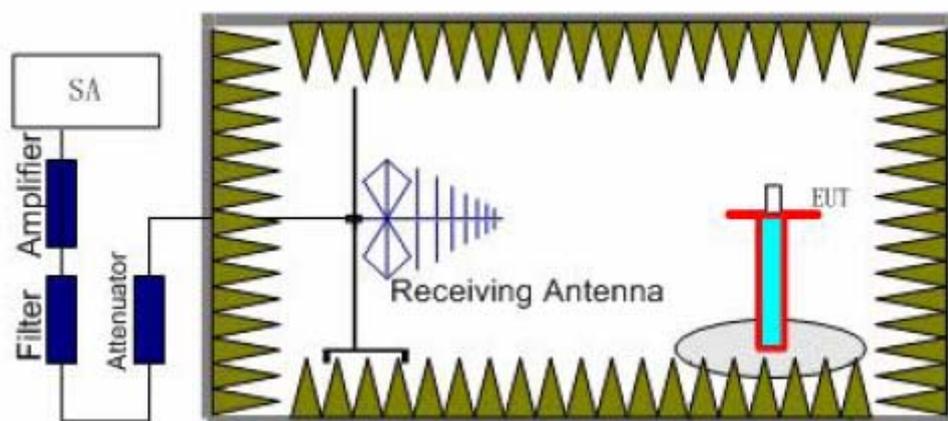

Step 1

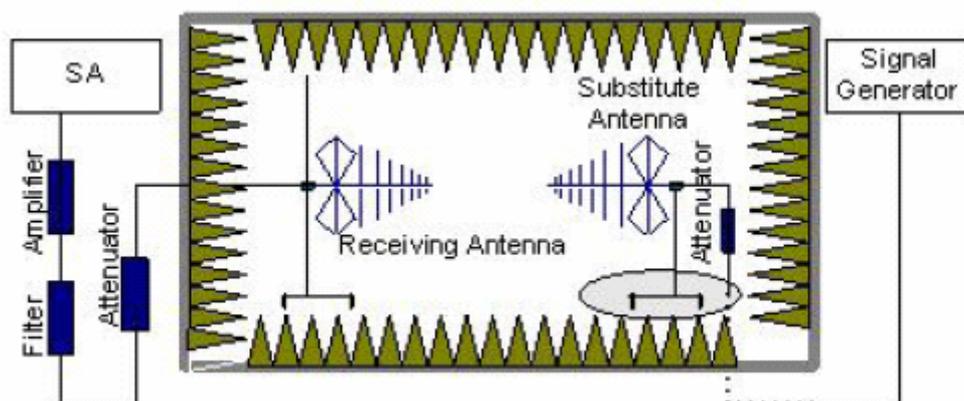

Step 2

Test procedure:

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be

established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A RMS detector is used and RBW is set to 3MHz. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver.

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator. To repeat the same procedure as step1 and the level of signal generator will be adjusted till the same power value on the spectrum analyzer or receiver. The ERP/EIRP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

The measurement will be conducted at three channels No512, No661 and No810 (Bottom, middle and top channels of PCS1900 band)

Limits	≤ 33dBm
--------	---------

Test result:

GSM/GPRS MODE:

Carrier frequency (MHz)	Channel No.	E.I.R.P. (dBm)
1850.2	512	19.1
1880.0	661	19.1
1909.8	810	19.2

EDGE MODE:


Carrier frequency (MHz)	Channel No.	E.I.R.P. (dBm)
1850.2	512	18.9
1880.0	661	19.1
1909.8	810	19.0

2.2.2.3 Occupied Bandwidth-FCC Part2.1049

Ambient condition:

Temperature	Relative humidity	Pressure
24°C	55%	101.0kPa

Test Setup:

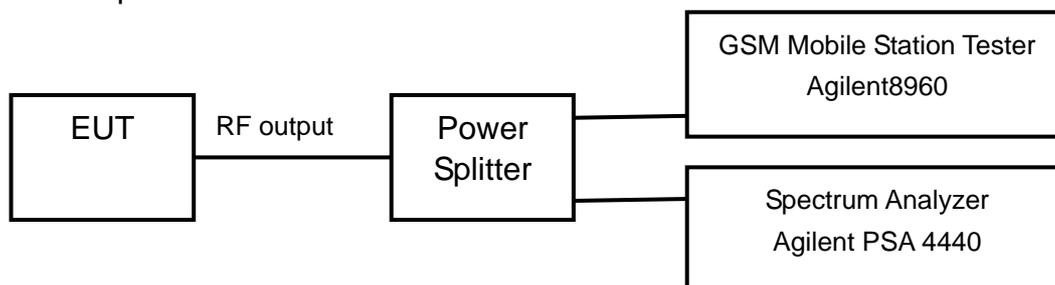

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 3kHz on spectrum analyzer. The bandwidth of 99% power can be read on spectrum analyzer. The measurement will be conducted at one channel No661 .

Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:

GSM/GPRS MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (KHz)
1850.2	512	246.2
1880.0	661	243.4
1909.8	810	250.0


EDGE MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (KHz)
1850.2	512	243.4
1880.0	661	244.4
1909.8	810	246.4


GSM/GPRS MODE:



Channel 512

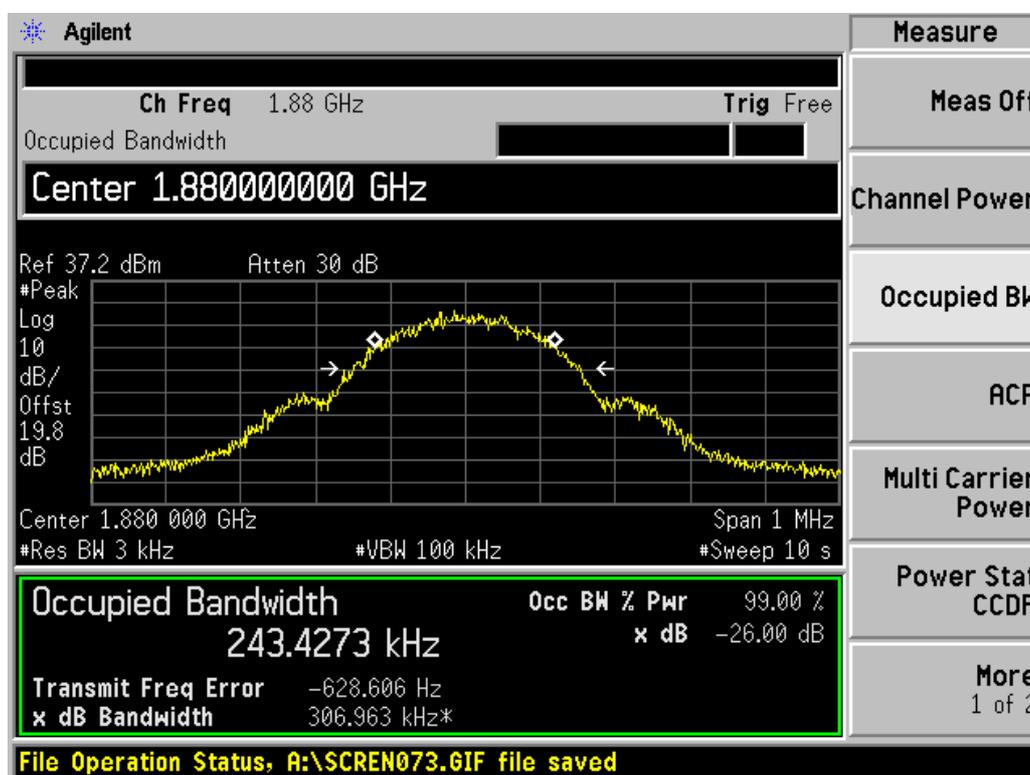


Channel 661

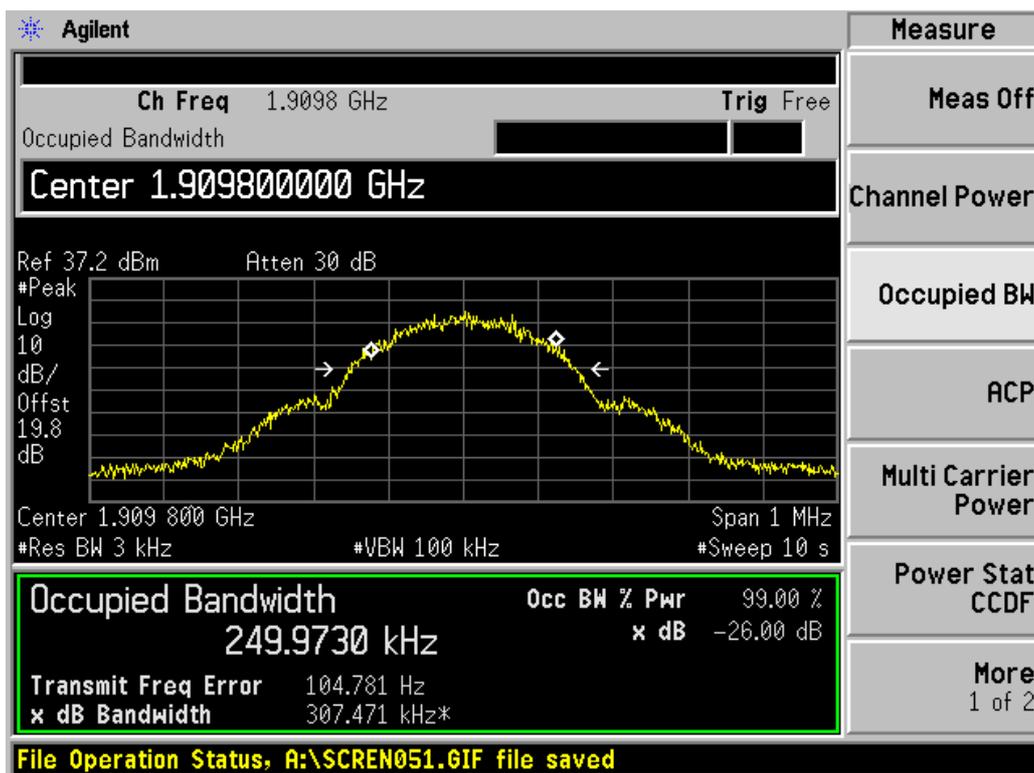


Channel 810


EDGE MODE:

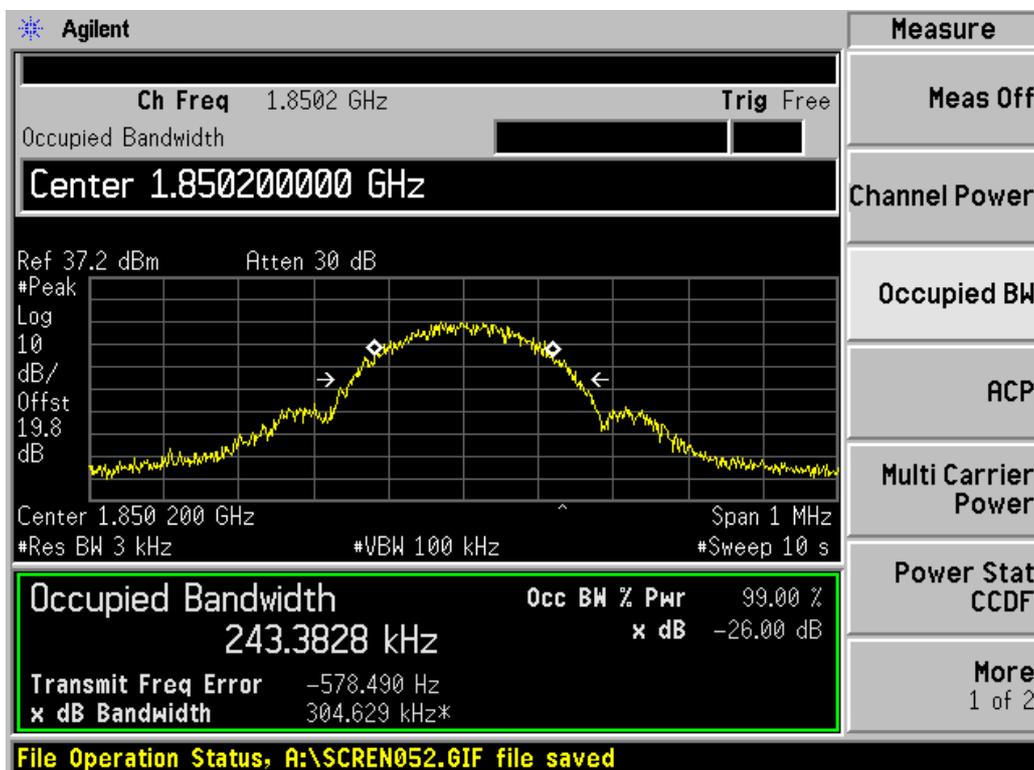

Channel 512

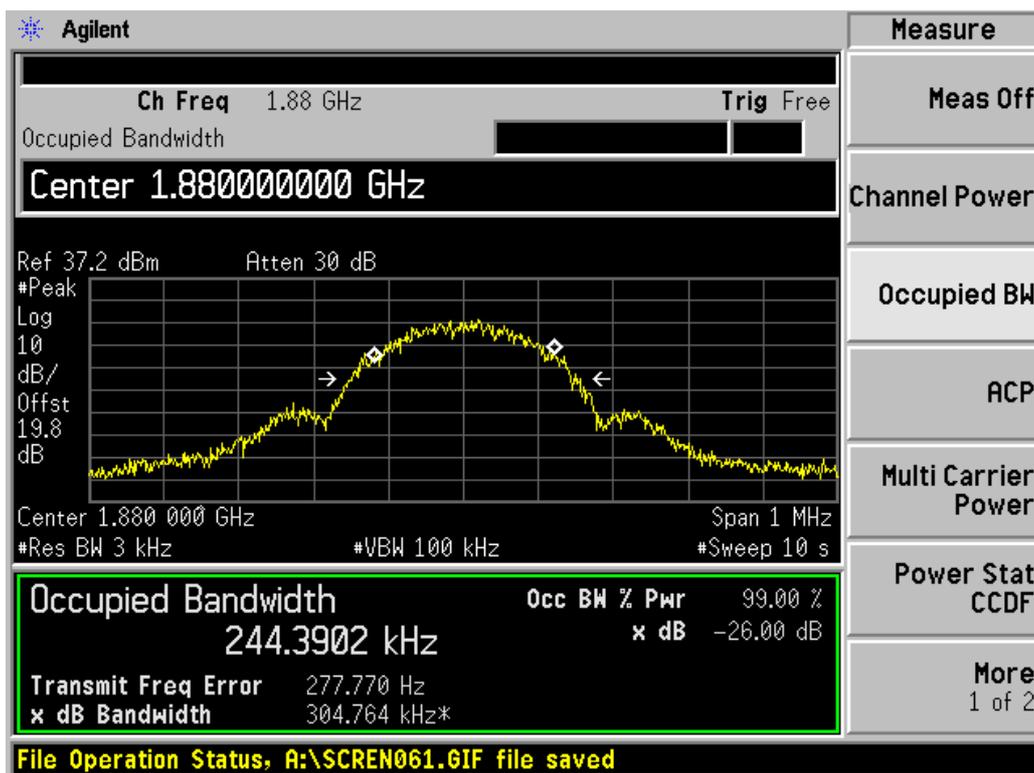

Channel 661

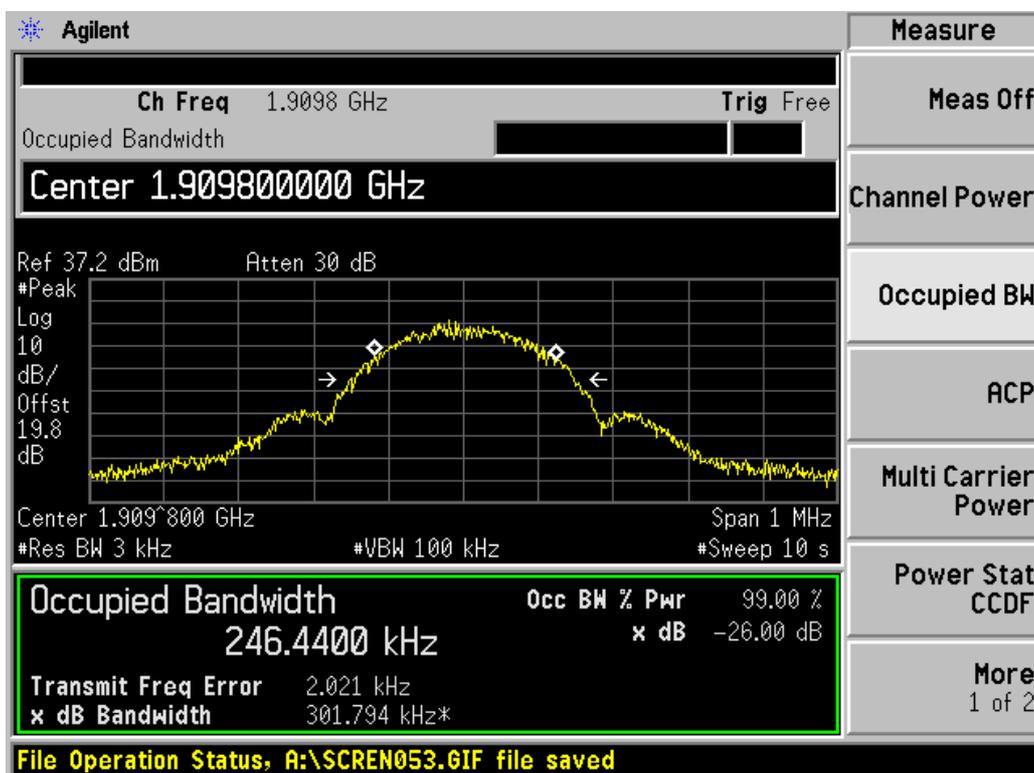


Channel 810

2.2.2.4 Spurious Emissions at antenna terminals-FCC Part2.1051/24.238

Ambient condition:

Temperature	Relative humidity	Pressure
24°C	55%	101.0kPa

Test Setup:

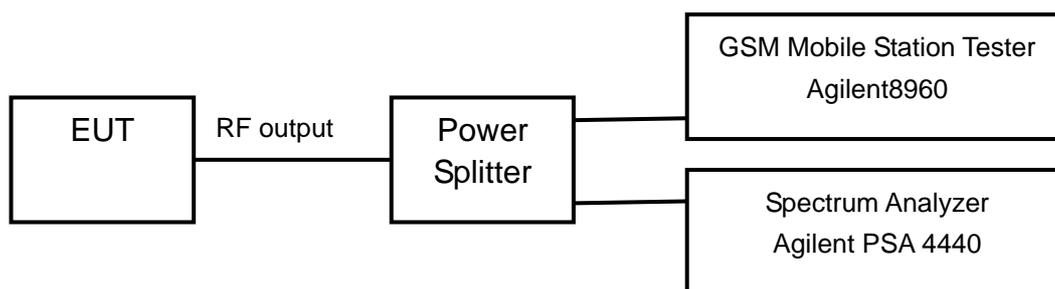

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10th harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer.


The measurement will be conducted at one channel No661

Limits	≤ -13dBm
--------	----------


Test result:

Refer to the following figures.

GSM/GPRS MODE:

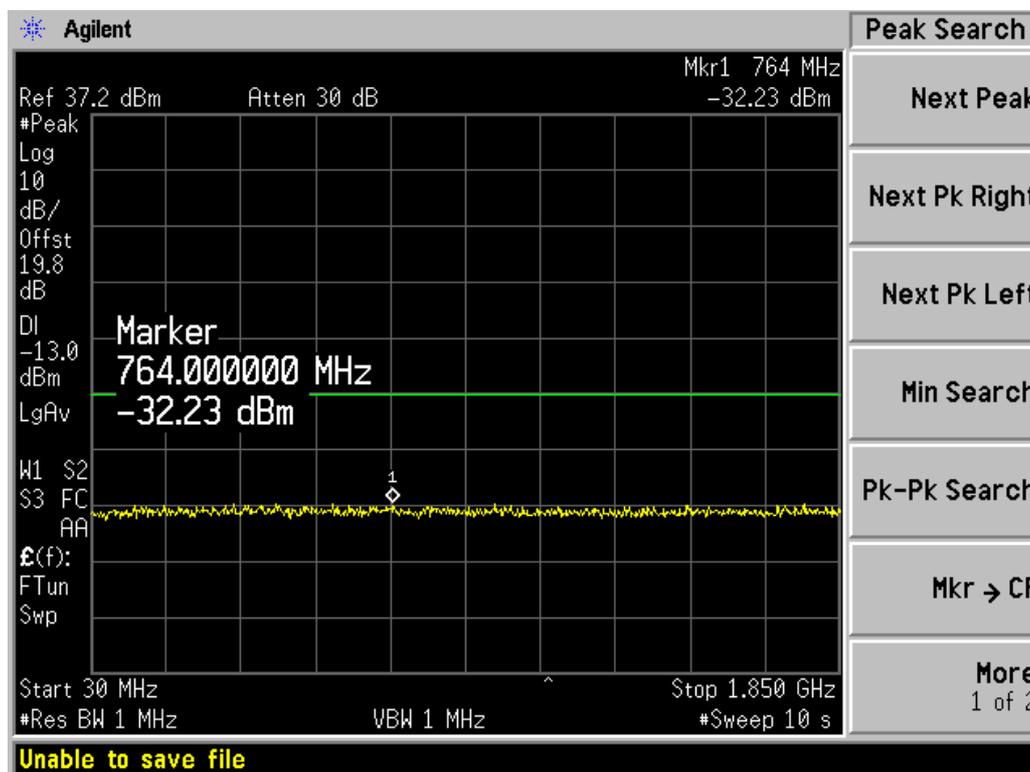


Channel 661, 30MHz~1850MHz

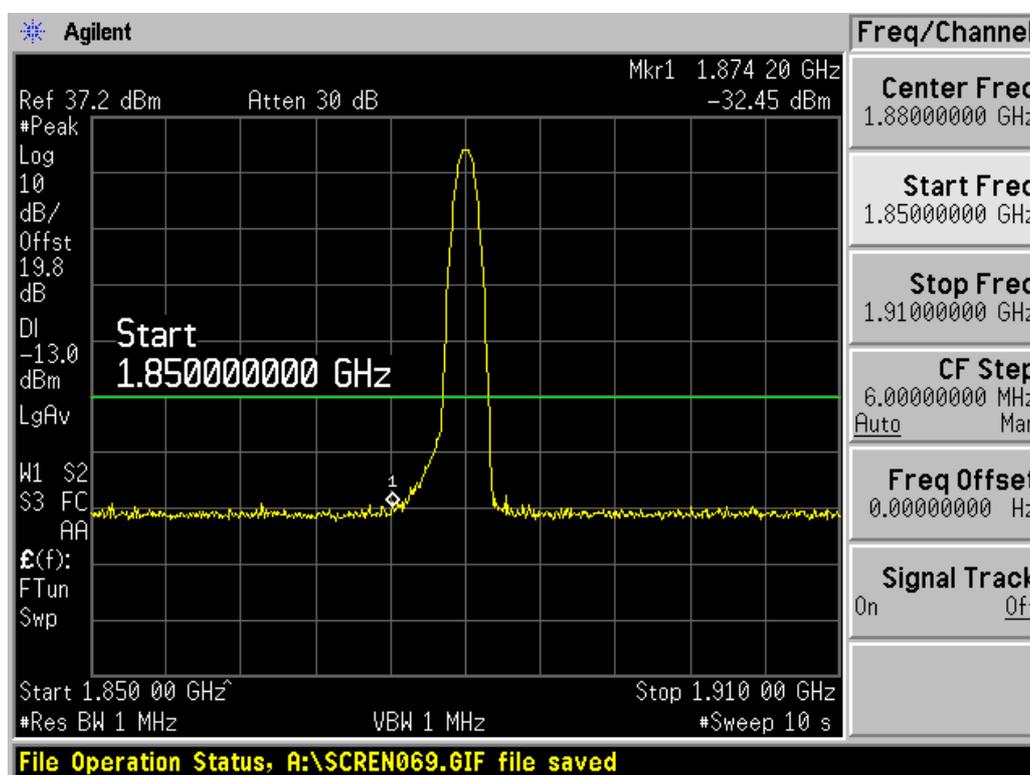


Channel 661, 1850MHz~1910MHz

Note: The signal beyond the limit is carrier.

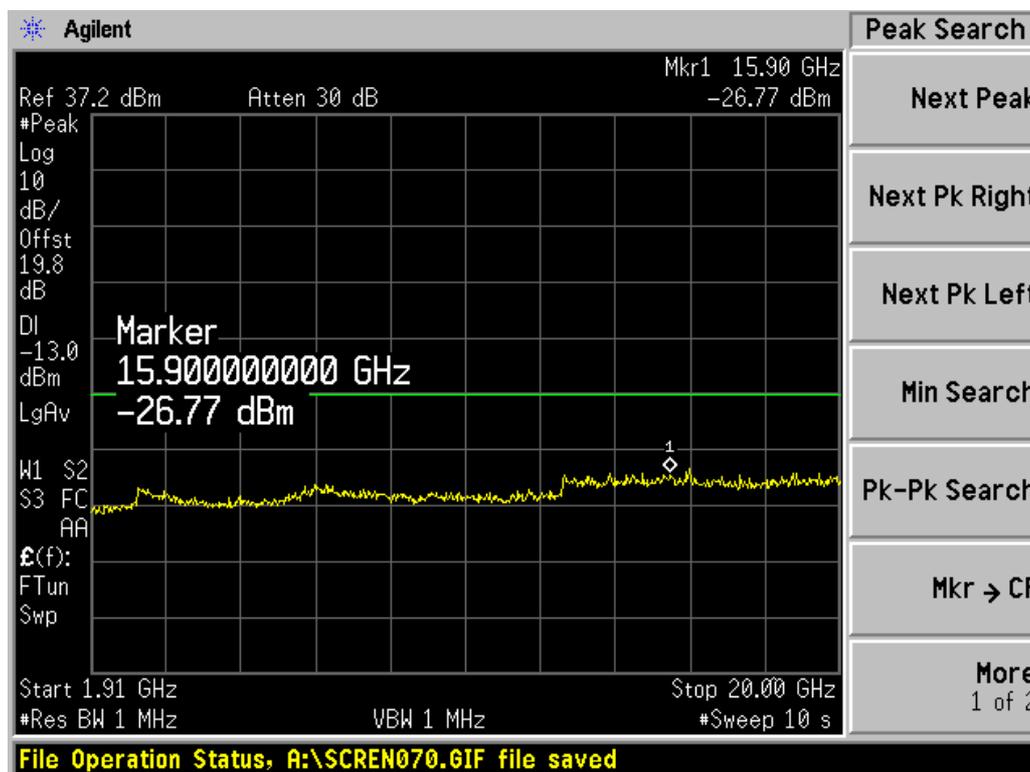


Channel 661, 1910MHz~20GHz

EDGE MODE:

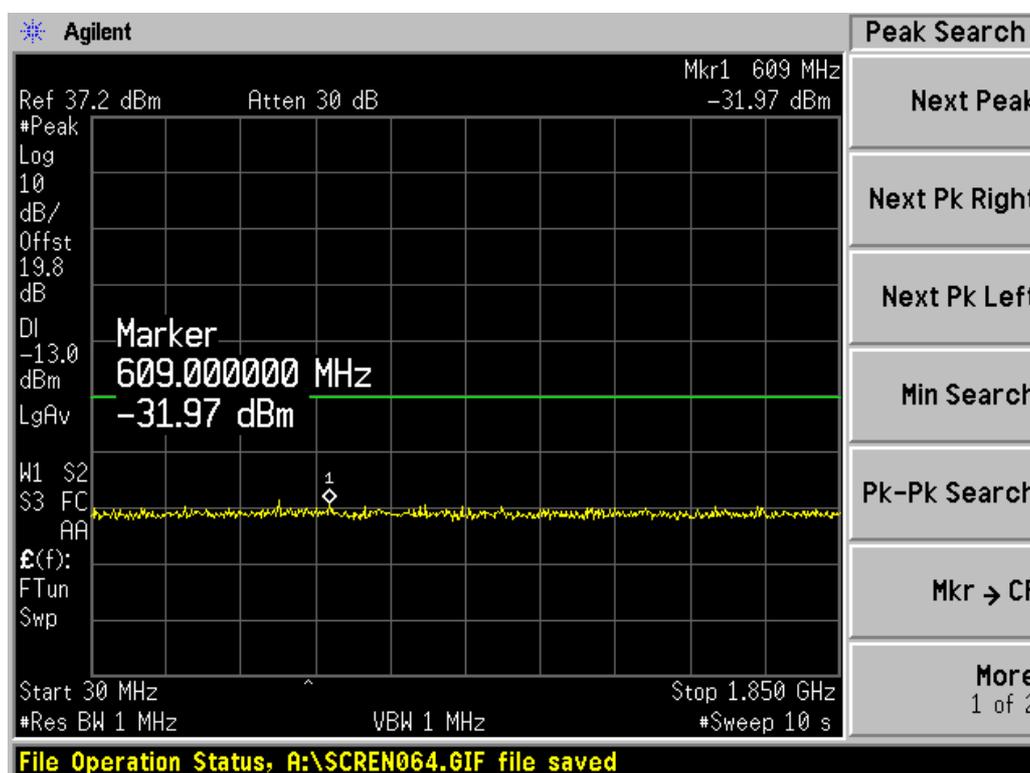


Channel 661, 30MHz~1850MHz

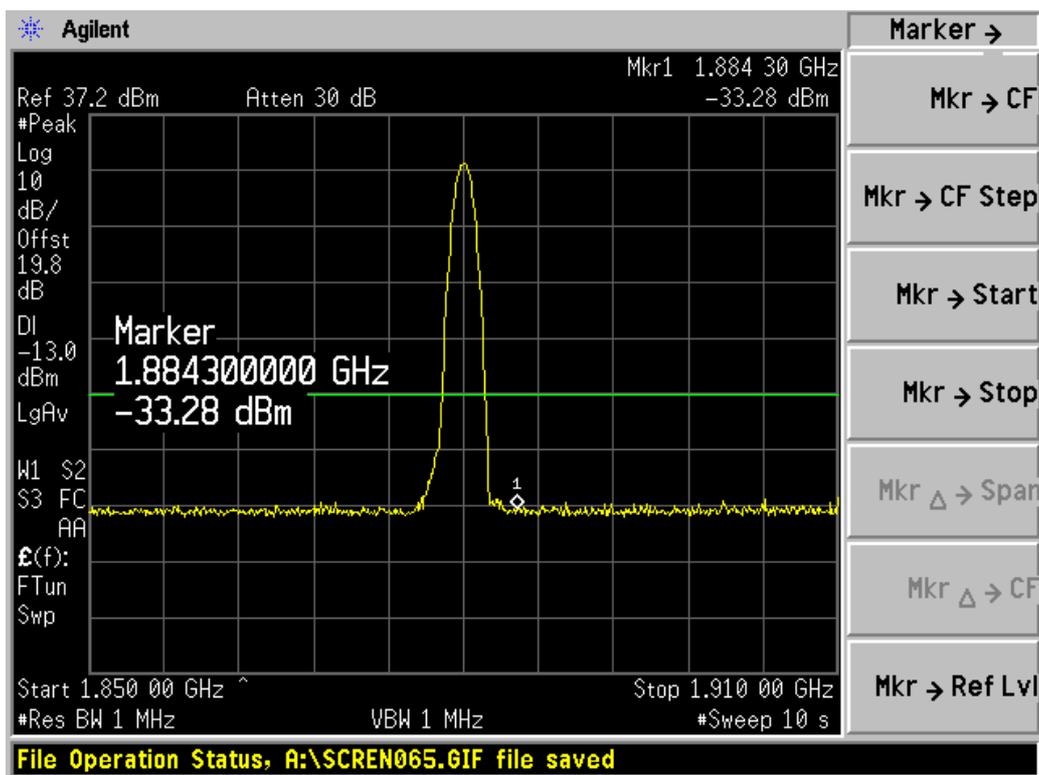

Channel 661, 1850MHz~1910MHz

Note: The signal beyond the limit is carrier.

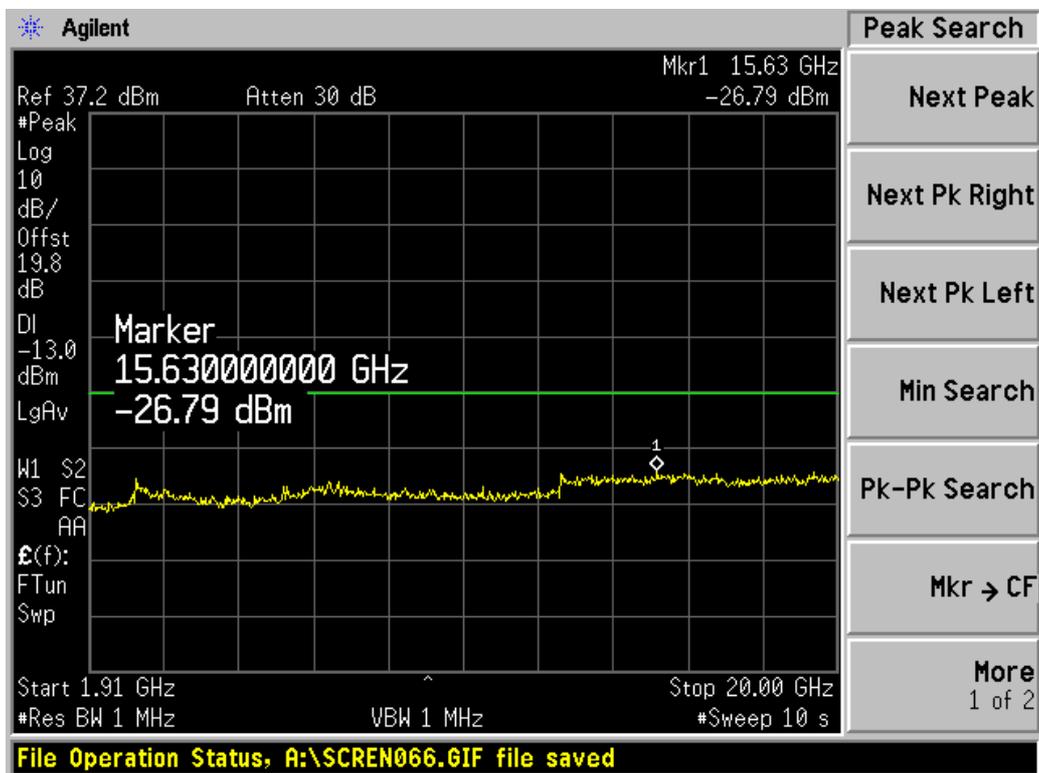


Channel 661, 1910MHz~20GHz

2.2.2.5 Band Edges Compliance- FCC Part2.1051/24.238

Ambient condition:

Temperature	Relative humidity	Pressure
24°C	55%	101.0kPa

Test Setup:

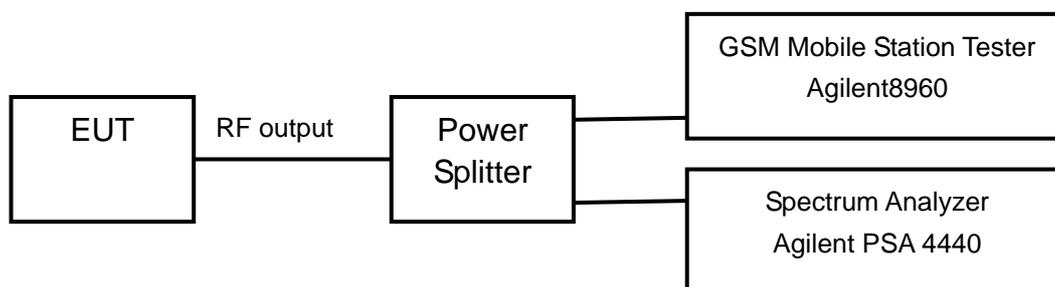

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The peak detector is used and RBW is set to 3KHz on spectrum analyzer.


The measurement will be conducted at two channels No512 and No810 (Bottom and top channels of PCS1900 band)

Limits	≤ -13dBm
--------	----------


Test result:

Refer to the following figures.

GSM/GPRS MODE:

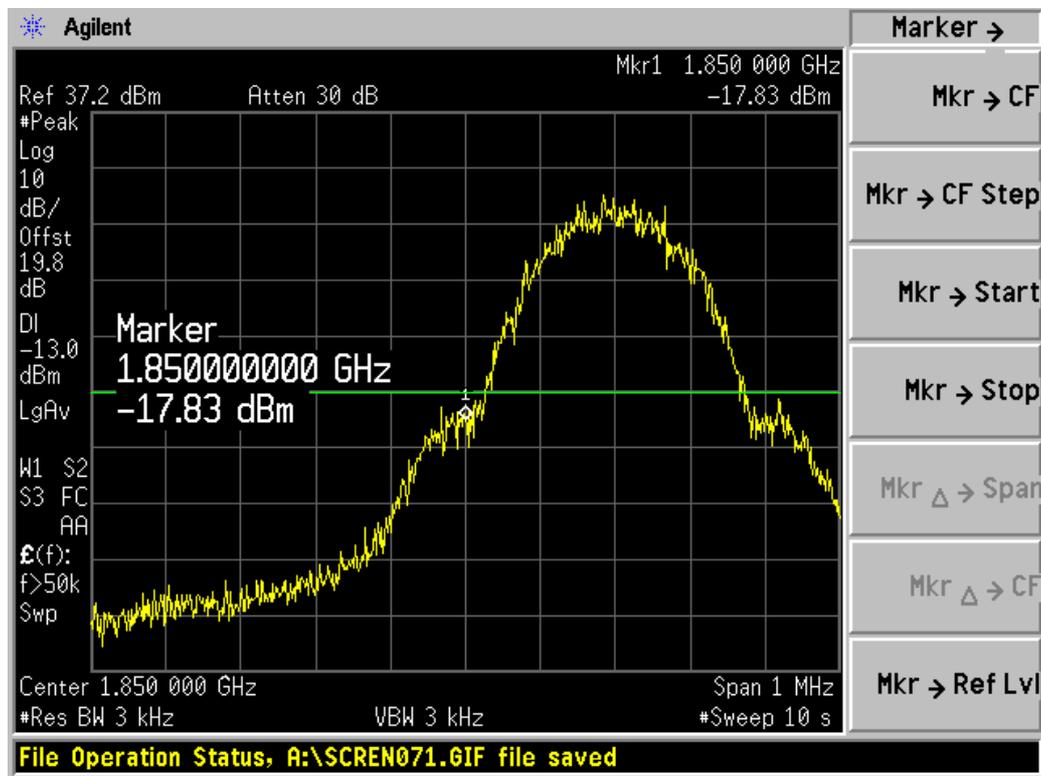


Channel 512

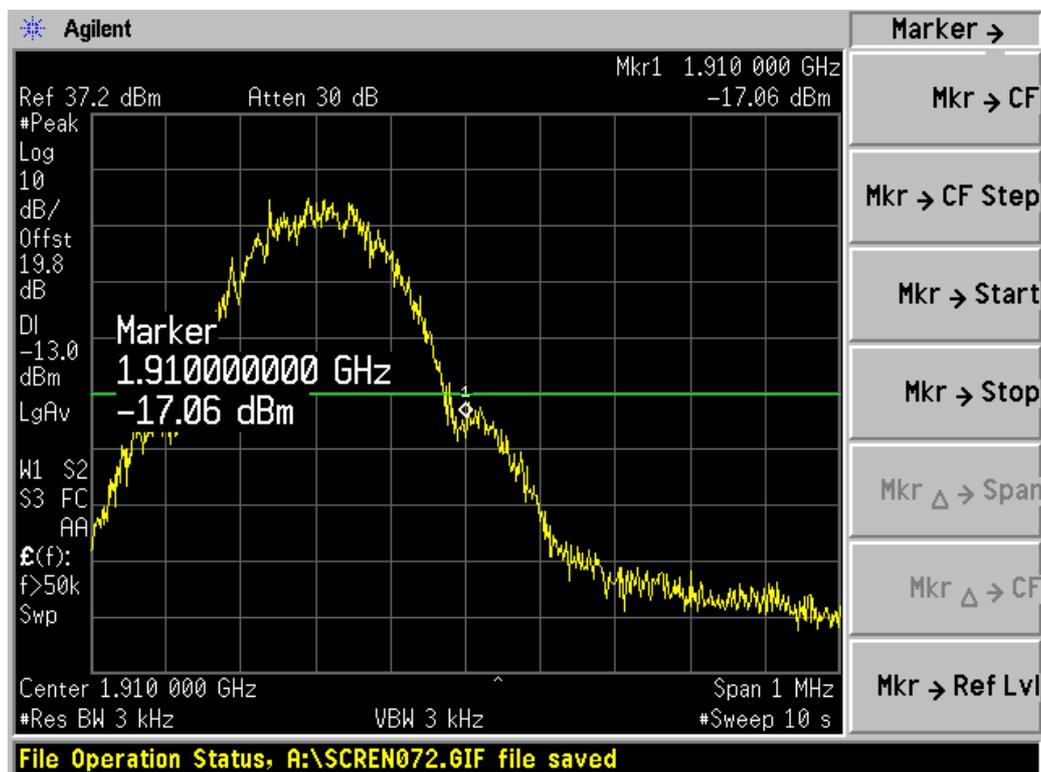


Channel 810

EDGE MODE:

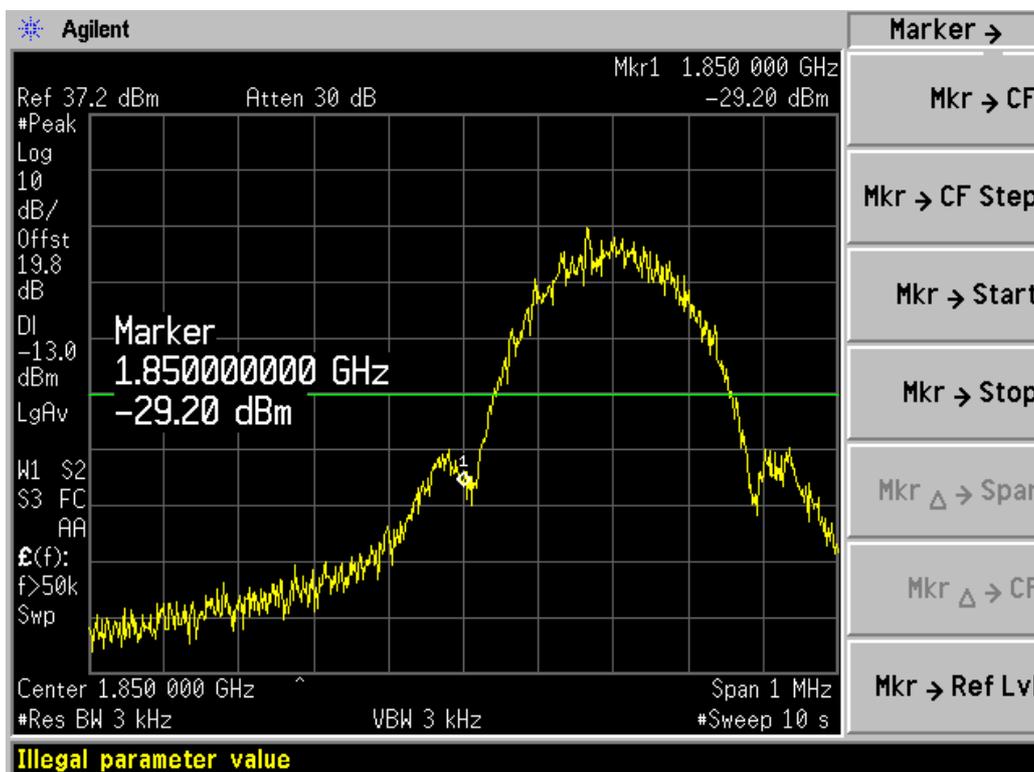

Channel 512

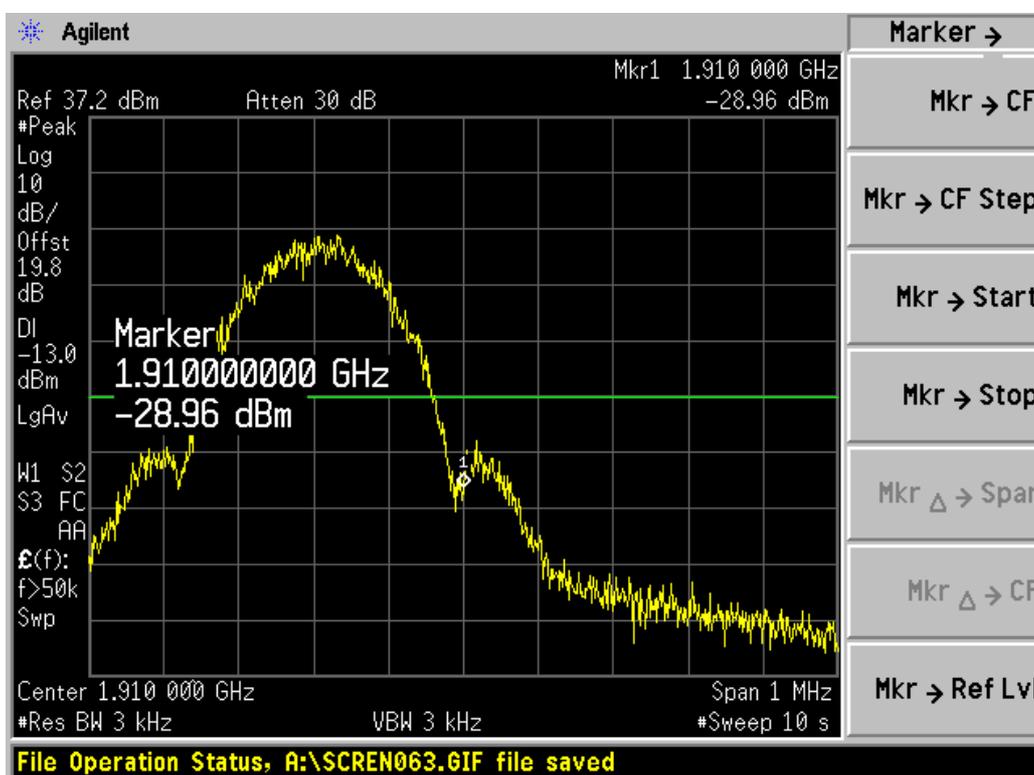


Channel 810

2.2.2.6 Frequency Stability-FCC Part2.1055/Part24.235

Ambient condition:

Temperature	Relative humidity	Pressure
24°C	55%	101.0kPa

Test setup:

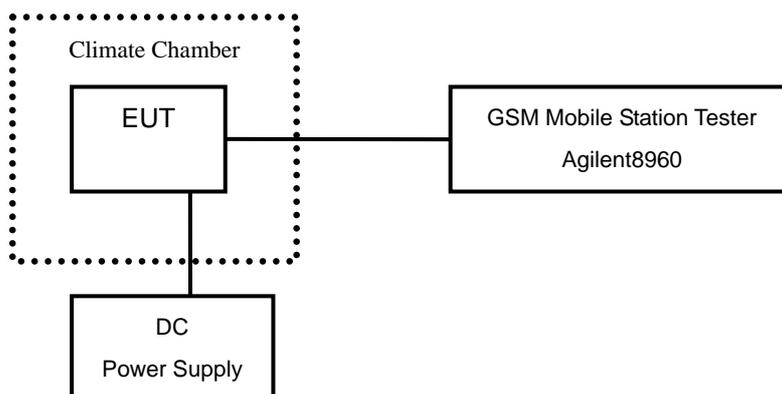

Test Procedure:

A radio link shall be established between EUT and Tester. The tester will sample the transmitter RF output signal and measure its frequency. The temperature inside the climate chamber is varied from -10 to +50° C in 10° C step size.

Limits: No specific frequency stability requirements in part 2.1055 and part 24.235

Test Result:

GSM/GPRS MODE:

Temperature(° C)	Test Result (ppm)		
	Channel 512	Channel 661	Channel 810
-10	---	0.010	---
0	---	0.009	---
+10	---	0.005	---
+20	---	0.012	---
+30	---	0.027	---
+40	---	0.015	---
+50	---	0.010	---

EDGE MODE:


Temperature(° C)	Test Result (ppm)		
	Channel 512	Channel 661	Channel 810
-10	---	0.032	---
0	---	0.030	---
+10	---	0.027	---
+20	---	0.035	---
+30	---	0.034	---
+40	---	0.026	---
+50	---	0.027	---

2.2.2.7 Radiated Spurious Emissions-FCC Part2.1053/24.238


Ambient condition

Temperature	Relative humidity	Pressure
24°C	55%	101.0kPa

Test Setup:

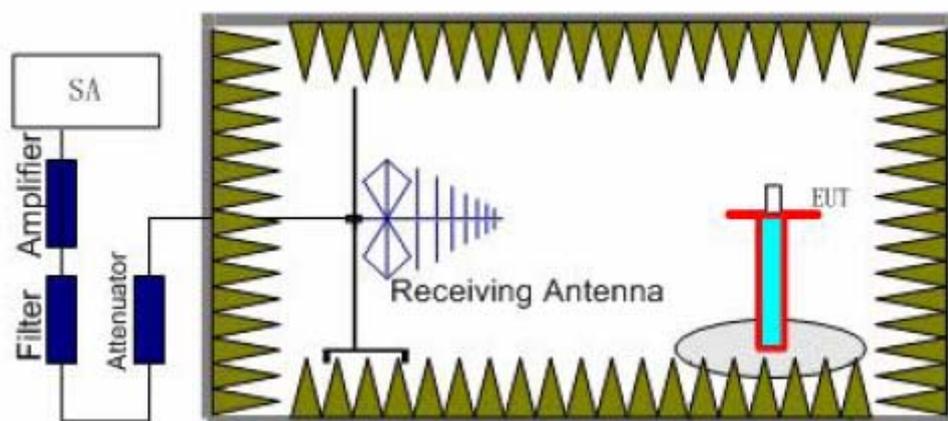

Step 1

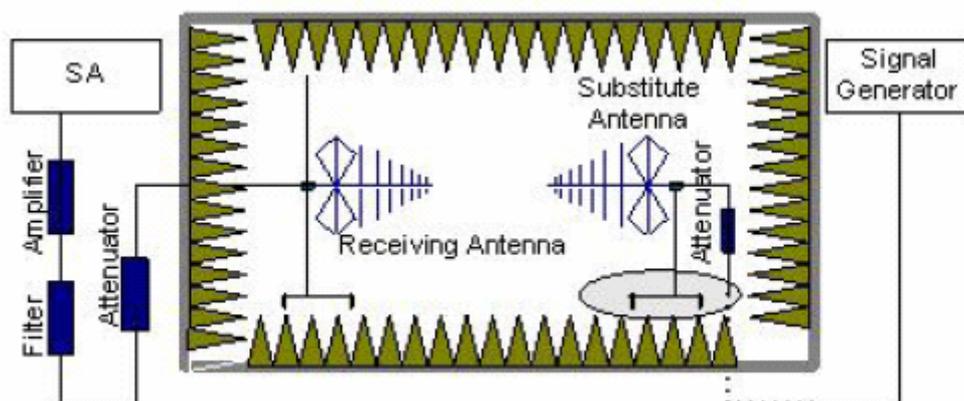

Step 2

Test procedure:

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meter high non-conductive table at a 3 meter test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be

established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10th harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

Calculation procedure:

The data of cable loss, antenna gain and air loss has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss, antenna gain and air loss. The basic equation with a sample calculation is as followed:

$$P=P_R+L_C+L_A-G$$

Where

P: Power of the Radiated Spurious Emissions (dBm)

P_R: reading of the receiver (dBm)

L_C: Cable Lose (dB)

L_A: Air loss (dB)

G: Antenna Gain (dBi)

Assumed the reading of the receiver is -60dBm. A cable lose of 10dB, an air lose of 30dB and an antenna gain of 11dBi are added.

$$P=P_R+L_C+L_A-G=-60+10+30-11=-31dBm$$


The measurement will be conducted at one channels No661

Limits	≤ -13dBm
--------	----------


Test result:

Refer to the following figures.

GSM/GPRS MODE:

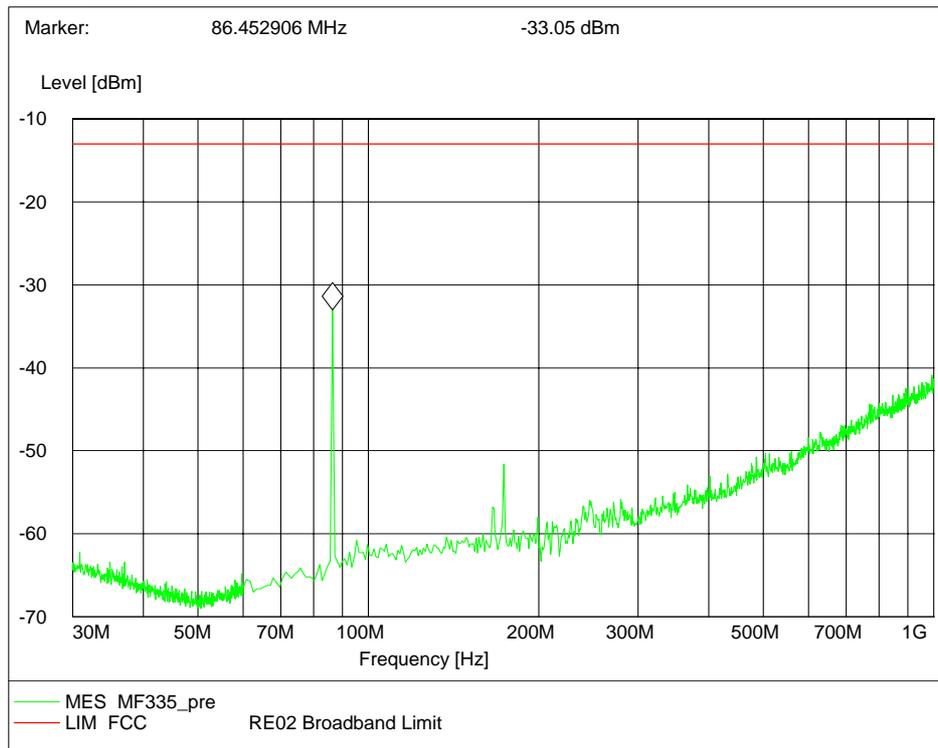


Channel 661, 30MHz~1GHz (Traffic Mode)

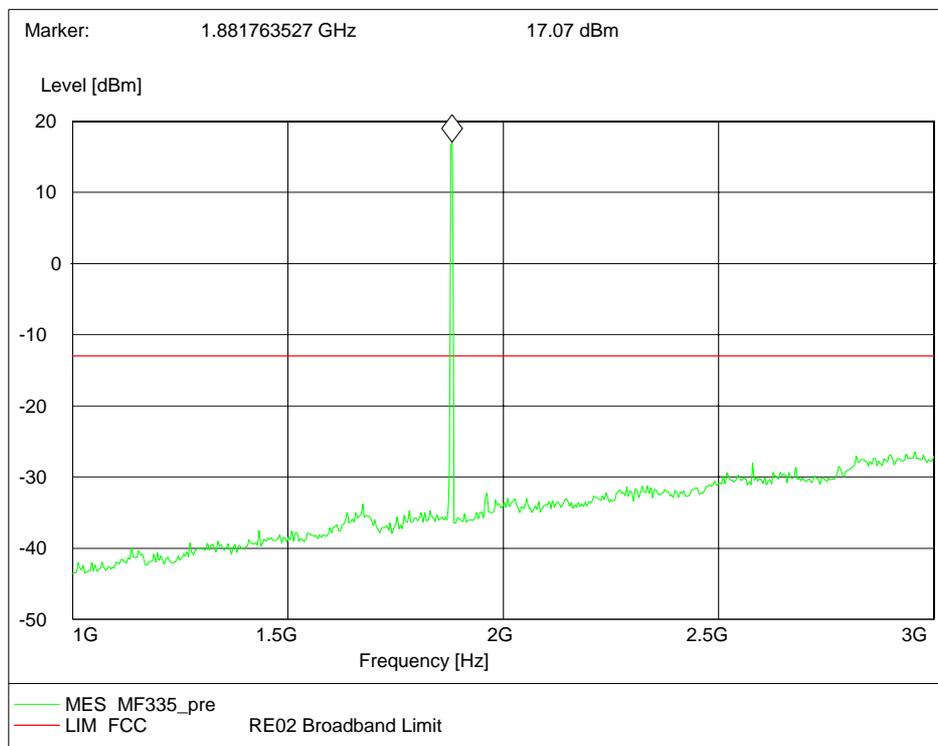


Channel 661, 1GHz~3GHz(Traffic Mode)

Note: The signal beyond the limit is carrier.

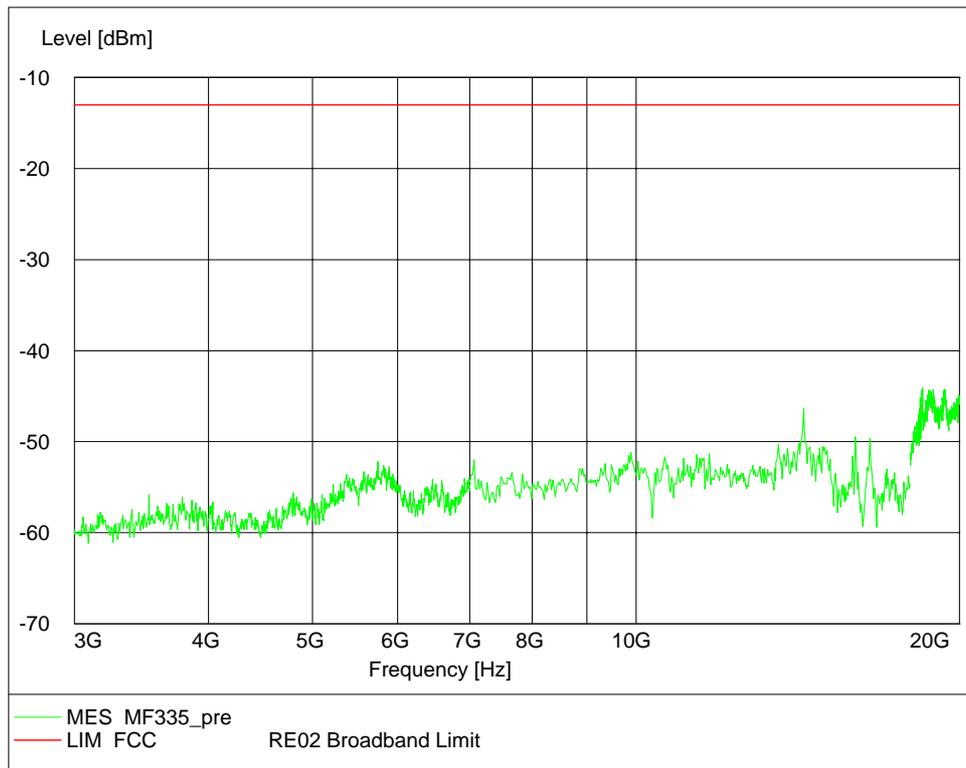


Channel 661, 3GHz~20GHz(Traffic Mode)

EDGE MODE :

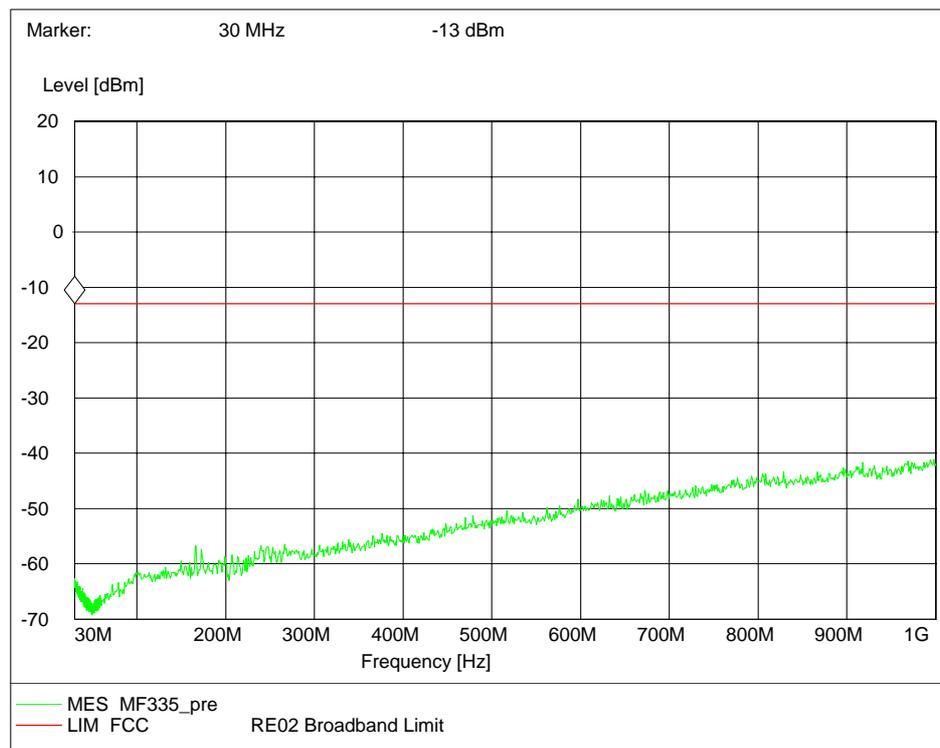


Channel 661, 30MHz~1GHz (Traffic Mode)

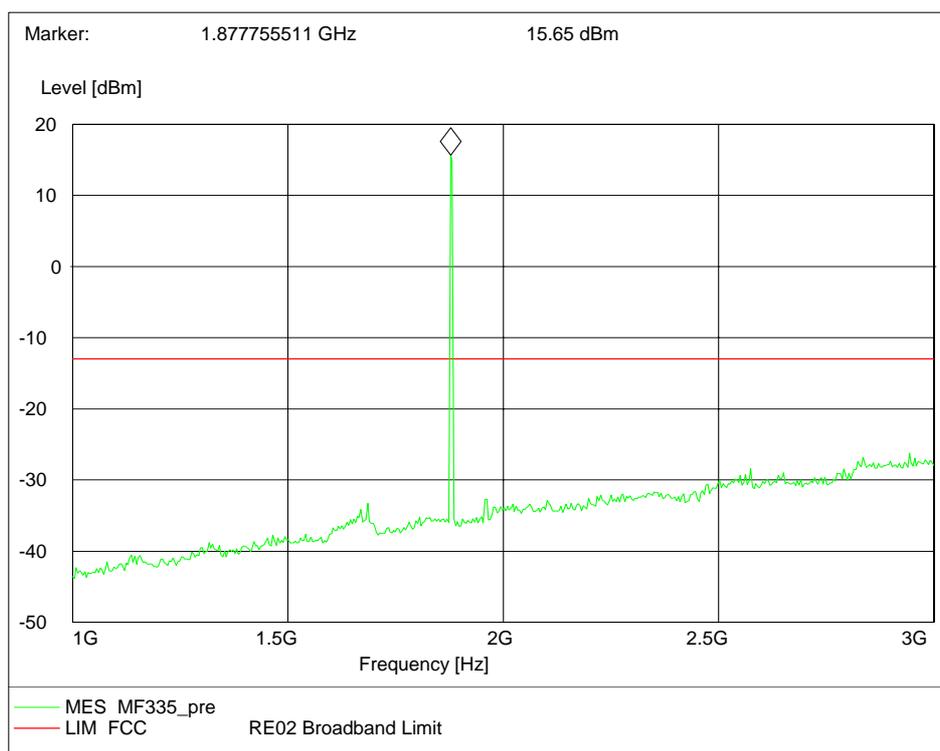

Channel 661, 1GHz~3GHz(Traffic Mode)

Note: The signal beyond the limit is carrier.

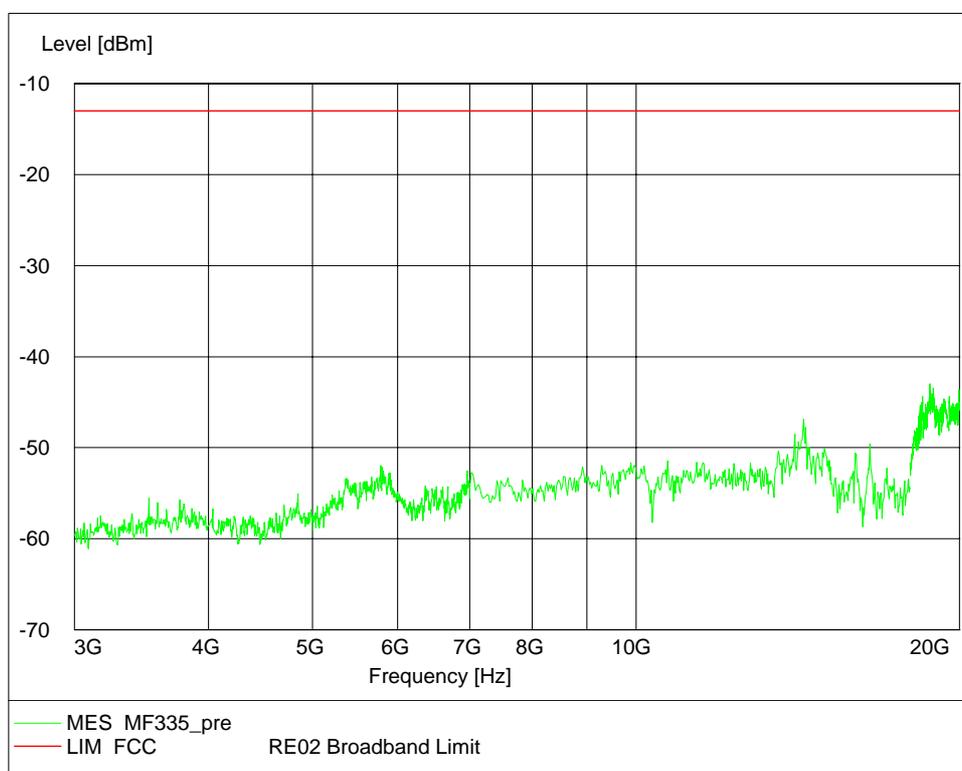


Channel 661, 3GHz~20GHz(Traffic Mode)

2.2.2.8 Radiated Emissions -FCC Part15.109

Ambient condition:

Temperature	Relative humidity	Pressure
24°C	55%	101.0kPa

Test Setup:

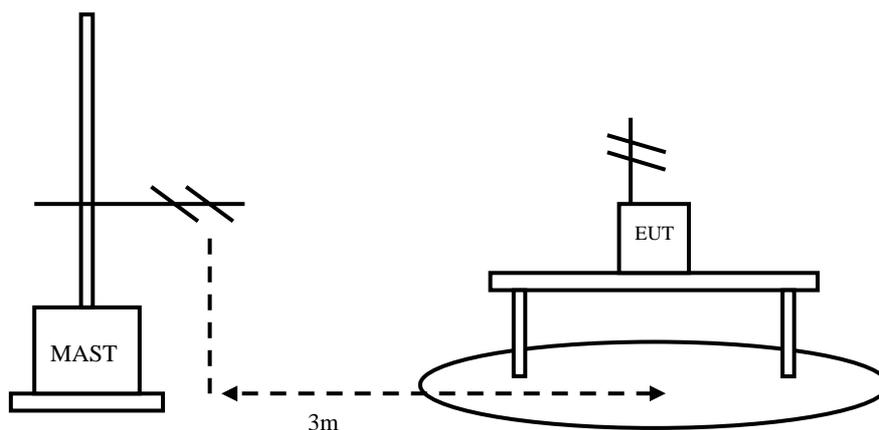

Test Procedure:

The EUT and receive antenna shall be placed to SAC (semi anechoic chamber) upon a non-metallic turn table. The receive antennas shall be moved from 1 to 4 meters. The distance between equipment and receive antenna shall be 3 meters.

Testing shall operate the EUT in idle modes of operation and cable positions in a test set-up which is representative of typical system configurations, as declared by the manufacturer. The output port shall be terminated with 50 ohms.


Then start the test software ES-K1. Sweep the whole frequency band through the range from 30MHz to 1GHz, using receive log period antenna HL562.

During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Frequency of Emission(MHz)	Limits	
	Unit(μ V/m)	Average(dB μ V/m)
30~88	100	40
88~216	150	43.5
216~960	200	46
960~1000	500	54

Test result:
 Refer to the following figures.

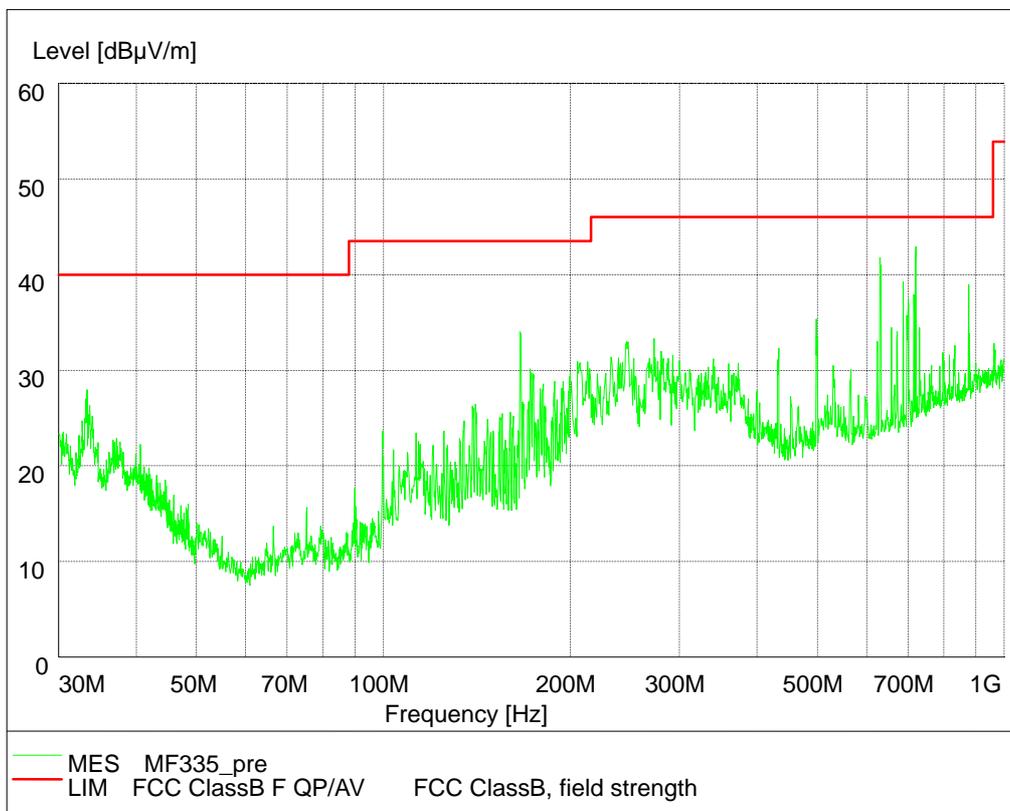

2.3. List of test equipments

No.	Name/Model	Manufacturer	S/N	Calibration Date
1	8960 E5515C Mobile Station Tester	Agilent	GB44050904	Mar. 2007
2	PSA E4440A Spectrum Analyzer	Agilent	MY41000183	Mar. 2007
5	66309B DC Power Supply	Agilent	MY43000461	Aug. 2007
6	1506A Power Splitter	Weinschel	MN154	Aug. 2007
7	9.080m×5.255m×3.525m Shielding room	FRANKONIA	-----	Aug. 2007
8	ESI 40 EMI test receiver	R&S	100015	Aug. 2007
9	SMR 20 Signal generator	R&S	100086	Aug. 2007
10	CMU 200 Radio tester	R&S	100313	Aug. 2007
11	12.65m*8.03m*7.50m Fully-Anechoic Chamber	FRANKONIA	-----	Aug. 2007
12	HL562 Ultra log test antenna	R&S	100016	Aug. 2007
13	ESH3-Z2 Pulse limiter	R&S	10002	Aug. 2007
14	ESH3-Z5 Attenuator	R&S	100020	Aug. 2007
15	ESH2Z11 LISN	R&S	50FH-020-10	Aug. 2007
16	CMU 200 Radio tester	R&S	100313	Aug. 2007
17	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100030	Aug. 2007
18	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100029	Aug. 2007
19	PS2000 Turn Table	FRANKONIA	-----	Aug. 2007
20	MA260 Antenna Master	FRANKONIA	-----	Aug. 2007
21	SH-241 Climatic Chamber	ESPEC	92000389	Aug. 2007
22	E5515C Mobile Station Tester	Agilent	GB45071696	Aug. 2007
23	ES-K1EMI test software	R&S	-----	Aug. 2007
24	HL562 Receive antenna	R&S	100167	Aug. 2007

Appendix

Appendix1 Test Setup