



TEST REPORT

No. 2011TAR501

for

ZTE CORPORATION

WCDMA uFi Hot Spot

Model Name: MF50

FCC ID: Q78-ZTEMF50

with

Hardware Version: d30B

Software Version: EN_ZTE_MF50TVV1.0.0B01

Issued Date: Oct 26, 2011

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAR accreditation (DIN EN ISO/IEC 17025): No. DGA-PL-114/01-02

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629A-1

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

3/F Shou Xiang Technology Building, No.51 Xueyuan Road, Hai Dian District, Beijing, P. R. China,100191.

Tel:+86(0)10-62304633-2604, Fax:+86(0)10-62304793, Email:welcome@emcite.com, web: www.emcite.com

CONTENTS

1. TEST LABORATORY	3
1.1. TESTING LOCATION	3
1.2. TESTING ENVIRONMENT	3
1.3. PROJECT DATA	3
1.4. SIGNATURE.....	3
2. CLIENT INFORMATION.....	4
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	5
3.4. GENERAL DESCRIPTION	6
4. REFERENCE DOCUMENTS.....	7
4.1. REFERENCE DOCUMENTS FOR TESTING.....	7
5. LABORATORY ENVIRONMENT.....	8
6. SUMMARY OF TEST RESULTS	9
7. TEST EQUIPMENTS UTILIZED.....	10
ANNEX A: MEASUREMENT RESULTS.....	11
A.1 OUTPUT POWER (§22.913(A)/ §24.232(B)/ §27.50(D)(2)).....	11
A.2 EMISSION LIMIT (§2.1051/ §22.917 §24.238/ §27.53(G))	17
A.3 CONDUCTED EMISSION (§15.107 §15.207)	23
A.4 FREQUENCY STABILITY (§2.1055/ §24.235/ §27.54)	27
A.5 OCCUPIED BANDWIDTH (§2.1049(H)(I)).....	30
A.6 EMISSION BANDWIDTH (§22.917(B)/ §24.238(B))	36
A.7 BAND EDGE COMPLIANCE (§22.917(B)/ §24.238(B)).....	42
A.8 CONDUCTED SPURIOUS EMISSION (§2.1057/ §22.917/ §24.238).....	45

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: 3/F Shou Xiang Technology Building, No.51 Xueyuan Road, Hai
Dian District, Beijing, P. R. China
Postal Code: 100191
Telephone: 00861062304633
Fax: 00861062304793

1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: Sep 07, 2011
Testing End Date: Oct 26, 2011

1.4. Signature



Zi Xiaogang
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: ZTE CORPORATION
Address /Post: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan
District, Shenzhen, Guangdong, 518057, P.R.China
City: Shenzhen
Postal Code: 518057
Country: China
Telephone: 0086 21 68895196
Fax: 0086 21 61460600

2.2. Manufacturer Information

Company Name: ZTE CORPORATION
Address /Post: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan
District, Shenzhen, Guangdong, 518057, P.R.China
City: Shenzhen
Postal Code: 518057
Country: China
Telephone: 0086 21 68895196
Fax: 0086 21 61460600

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	WCDMA uFi Hot Spot
Model Name	MF50
FCC ID	Q78-ZTEMF50
Frequency	GSM 850MHz; PCS1900MHz; WCDMA BAND II; WCDMA BAND IV; WCDMA BAND V;
Antenna	Internal
Output power	28.23 dBm maximum EIRP measured for WCDMA BAND IV
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.7VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
N07	868380000005352	d30B	EN_ZTE_MF50TVV1.0.0B01
N08	868380000005329	d30B	EN_ZTE_MF50TVV1.0.0B01

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Battery	
AE2	Charger	

AE1

Model	Li3715T42P3h654251
Manufacturer	ZTE
Capacitance	1500mAh
Nominal Voltage	3.7V

AE2

Model	STC-A22O50I700USBA-Z
Manufacturer	DOKOCOM
Length of DC line	120cm

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model of WCDMA uFi Hot Spot with integrated antenna. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	V 10.1.09
FCC Part 22	PUBLIC MOBILE SERVICES	V 10.1.09
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	V 10.1.09
ANSI/TIA-603-C	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2004
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

6. SUMMARY OF TEST RESULTS

Items	List	Clause in FCC rules	Verdict
1	Output Power	22.913(a)/24.232(b)/27.50(d)(2)	P
2	Emission Limit	2.1051/22.917/24.238/27.53(g)	P
3	Frequency Stability	2.1055/24.235/ 27.54	P
4	Occupied Bandwidth	2.1049(h)(i)	P
5	Emission Bandwidth	22.917(b)/24.238(b)/ 27.53(g)	P
6	Band Edge Compliance	22.917(b)/24.238(b)/ 27.53(g)	P
7	Conducted Spurious Emission	2.1057/22.917/24.238/ 27.53(g)	P

7. Test Equipments Utilized

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER	CAL DUE DATE
1	Test Receiver	ESCI	100766	R&S	2011-12-06
2	Test Receiver	ESI40	831564/002	R&S	2011-12-12
3	BiLog Antenna	VULB9163	9163-175	Schwarzbeck	2011-12-05
4	BiLog Antenna	VULB9163	9163-302	Schwarzbeck	2011-12-10
5	Signal Generator	SMB100A	102063	R&S	2011-12-05
7	LISN	ESH2-Z5	829991/012	R&S	2011-12-20
8	Spectrum Analyzer	FSU26	200030	R&S	2011-12-18
9	Spectrum Analyzer	FSU46	100054	R&S	2011-12-14
10	Universal Radio Communication Tester	CMU200	100680	R&S	2011-12-23
11	Universal Radio Communication Tester	CMU200	109914	R&S	2011-12-21
12	Dual-Ridge Waveguide Horn Antenna	3117	00119024	ETS	2012-12-31
13	Dual-Ridge Waveguide Horn Antenna	3117	00119021	ETS	2013-12-09
14	Dual-Ridge Waveguide Horn Antenna	3116	2663	EMCO	2011-12-01
15	Dual-Ridge Waveguide Horn Antenna	3116	2661	EMCO	2011-12-01
16	Climatic chamber	PL-2G	343074	ESPEC	2011-12-15

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER (§22.913(a)/§24.232(b)/§27.50(d)(2))

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation.

This result contains peak output power and EIRP measurements for the EUT.

In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with Rhode & Schwarz Spectrum Analyzer FSU (RMS)

These measurements were done at 3 frequencies, 1852.4 MHz, 1880.0MHz and 1907.6MHz for WCDMA Band II;826.4MHz, 836.6MHz and 846.6MHz for WCDMA Band V and 1712.4MHz, 1740MHz, and 1752.6MHz for WCDMA Band IV(bottom, middle and top of operational frequency range).

Limit

According to FCC § 2.1046.

A.1.2.2 Test Condition

RBW	VBW	Sweep Time	Span
10MHz	10MHz	800ms	50MHz

WCDMA Band II

Measurement result

WCDMA (Band II)	CH	Frequency(MHz)	output power(dBm)	Target (dB)
	9262	1852.4	23.25	23±1
	9400	1880.0	23.02	23±1
	9538	1907.6	23.09	23±1

WCDMA Band V

Measurement result

WCDMA (Band V)	CH	Frequency(MHz)	output power(dBm)	Target (dB)
	4132	826.4	23.22	23±1
	4183	836.6	23.33	23±1
	4233	846.6	23.18	23±1

WCDMA Band IV
Measurement result

WCDMA (Band IV)	CH	Frequency(MHz)	output power(dBm)	Target (dB)
	1312	1712.4	23.05	23±1
	1450	1740	23.35	23±1
	1513	1752.6	23.85	23±1

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.


Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 22.913(a) specifies " The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603C-2004 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

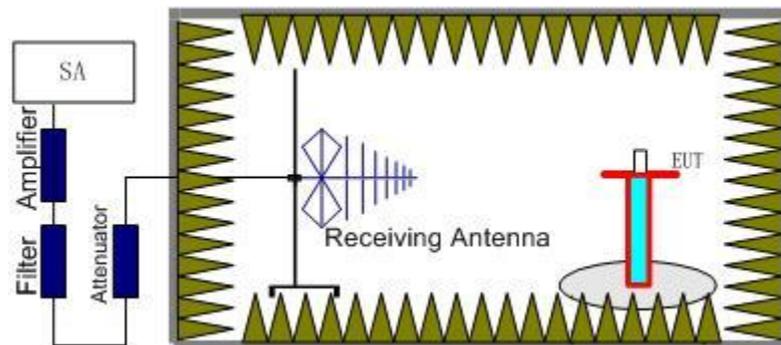

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

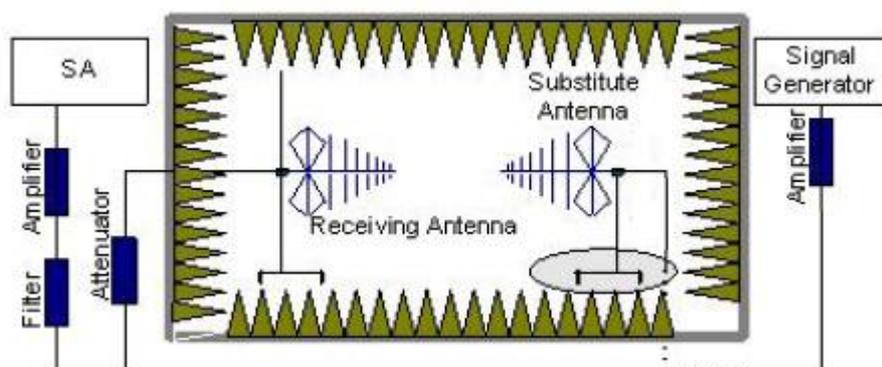

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.
The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} + P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

WCDMA Band II-EIRP

Limits

	Burst Peak EIRP (dBm)
WCDMA Band II	33dBm (2W)

Measurement result

Frequency(MHz)	Peak EIRP(dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	P _{Mea} (dBm)	Polarization
1852.4	25.91	3.90	-50.00	-4.55	-24.74	H
1880	25.17	3.64	-50.00	-4.43	-25.62	V
1907.6	26.99	3.60	-50.00	-4.31	-23.72	V

Frequency: 1907.6MHz

Peak EIRP(dBm)= P_{Mea}(-23.72dBm)- P_{cl}(3.60dB)- P_{Ag}(-50.00dB)-G_a (-4.31dB) =dBm

ANALYZER SETTINGS: RBW = VBW = 3MHz

WCDMA Band V-ERP

Limits

	Burst Peak ERP (dBm)
WCDMA Band V	38.45dBm (7W)

Measurement result

Frequency(MHz)	Peak ERP(dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dBm)	P _{Mea} (dBm)	Polarization
826.4	24.13	2.27	-53.00	0.85	2.15	-23.60	H
836.6	23.52	2.26	-53.00	0.90	2.15	-24.17	V
846.6	24.95	2.29	-53.00	0.94	2.15	-22.67	H

Frequency: 846.6MHz

Peak ERP(dBm)= P_{Mea}(-22.67dBm)- P_{cl}(2.29dB)- P_{Ag}(-53.00dB)-G_a (0.94B)-2.15dBm=24.95dBm

ANALYZER SETTINGS: RBW = VBW = 3MHz

WCDMA Band IV-EIRP

Limits

	Burst Peak EIRP (dBm)
WCDMA Band IV	30dBm (2W)

Measurement result

Frequency(MHz)	Peak EIRP(dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	P _{Mea} (dBm)	Polarization
1712.4	28.23	3.51	-50.00	-5.17	-23.43	H
1740	25.55	3.64	-50.00	-5.04	-25.85	V
1752.6	28.10	3.60	-50.00	-4.99	-23.29	H

Frequency: 1712.4MHz

Peak EIRP(dBm)= P_{Mea}(-23.43dBm)- P_{cl}(3.51dB)- P_{Ag}(-50.00dB)-G_a (-5.17dB) =28.23dBm

ANALYZER SETTINGS: RBW = VBW = 3MHz

A.2 EMISSION LIMIT (§2.1051/§22.917§24.238/§27.53(g))


A.2.1 Measurement Method

The measurements procedures in TIA-603C-2004 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238, Part 22.917 and Part 27.53. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the WCDMA Band II, WCDMA Band V and WCDMA Band IV.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

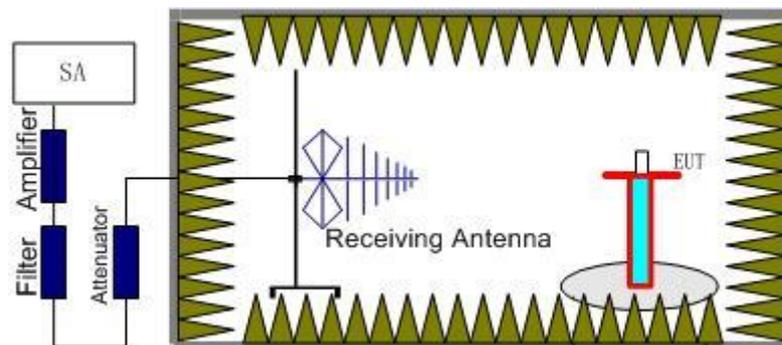

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

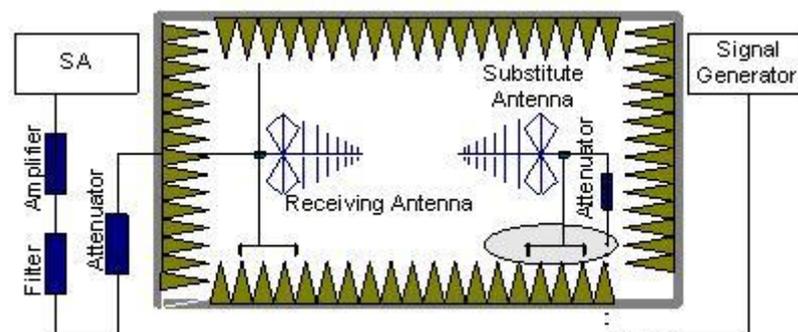

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

A.2.2 Measurement Limit

Part 24.238 , Part 22.917 and Part 27.53 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the WCDMA Band II (1852.4 MHz, 1880.0MHz and 1907.6MHz) , WCDMA Band V(826.4MHz, 836.6MHz and 846.6MHz) and WCDMA Band IV(1712.4MHz, 1740MHz and 1752.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band II, WCDMA Band V and WCDMA Band IV into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
WCDMA Band V	Low	30MHz-10GHz	Pass
	Middle	30MHz-10GHz	Pass
	High	30MHz-10GHz	Pass
WCDMA Band II	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass
WCDMA Band IV	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass

A.2.5 Sweep Table

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
WCDMA Band V	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
WCDMA Band II	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
18~20	1 MHz	3 MHz	2	
WCDMA Band IV	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
18~20	1 MHz	3 MHz	2	

WCDMA BAND II Mode Channel 9262/1852.4MHz

Frequency(MHz)	Peak EIRP(dBm)	Path Loss	Antenna Gain	P _{Mea} (dBm)	Limit (dBm)	Polarization
3702.41	-47.18	5.79	-8.14	-44.83	-13.00	H
5544.39	-58.10	6.70	-10.02	-54.78	-13.00	V
8873.57	-63.70	8.80	-12.50	-60.00	-13.00	H
9913.22	-64.53	8.19	-12.43	-60.29	-13.00	V
13923.72	-59.39	8.95	-13.97	-54.37	-13.00	V
16139.32	-57.69	8.52	-12.83	-53.38	-13.00	V

WCDMA BAND II Mode Channel 9400/1880MHz

Frequency(MHz)	Peak EIRP(dBm)	Path Loss	Antenna Gain	P _{Mea} (dBm)	Limit (dBm)	Polarization
3049.04	-64.77	4.99	-6.82	-62.94	-13.00	H
3757.91	-49.15	6.52	-8.21	-47.46	-13.00	H
5587.23	-62.64	6.85	-10.03	-59.46	-13.00	V
8839.52	-64.24	8.73	-12.47	-60.50	-13.00	H
10314.07	-60.59	8.28	-12.46	-56.41	-13.00	V
13873.92	-61.18	8.42	-13.95	-55.65	-13.00	H

WCDMA BAND II Mode Channel 9538/1907.6MHz

Frequency(MHz)	Peak EIRP(dBm)	Path Loss	Antenna Gain	P _{Mea} (dBm)	Limit (dBm)	Polarization
3812.69	-46.32	6.13	-8.28	-44.17	-13.00	H
5489.05	-58.01	6.84	-9.99	-54.86	-13.00	V
8573.24	-67.79	9.53	-12.26	-65.06	-13.00	V
10159.36	-63.54	8.59	-12.43	-59.70	-13.00	H
13903.70	-61.01	8.75	-13.96	-55.80	-13.00	V
16632.37	-53.74	10.40	-12.40	-51.74	-13.00	H

WCDMA BAND V Mode Channel 4132/826.4MHz

Frequency(MHz)	Peak ERP(dBm)	Path Loss	Antenna Gain	Correction	P _{Mea} (dBm)	Limit (dBm)	Polarization
				(dBm)			
1651.16	-52.72	3.42	-5.43	2.15	-52.86	-13.00	H
3309.92	-47.10	5.34	-7.44	2.15	-47.15	-13.00	V
4138.00	-56.62	6.73	-8.58	2.15	-56.92	-13.00	V
4964.51	-59.49	6.90	-9.64	2.15	-58.90	-13.00	V
5792.56	-52.83	6.89	-10.12	2.15	-51.75	-13.00	H
8827.17	-65.69	8.88	-12.46	2.15	-64.26	-13.00	V

WCDMA BAND V Mode Channel 4183/836.6MHz

Frequency(MHz)	Peak ERP(dBm)	Path Loss	Antenna Gain	Correction	P _{Mea} (dBm)	Limit (dBm)	Polarization
				(dBm)			
1670.95	-56.90	3.33	-5.35	2.15	-57.03	-13.00	H
3341.52	-47.56	5.50	-7.52	2.15	-47.69	-13.00	V
4181.25	-59.60	6.71	-8.61	2.15	-59.85	-13.00	V
5075.78	-63.60	7.04	-9.75	2.15	-63.04	-13.00	V
7139.26	-57.96	8.39	-11.18	2.15	-57.32	-13.00	H
8078.99	-64.57	12.74	-11.95	2.15	-67.51	-13.00	H

WCDMA BAND V Mode Channel 4233/846.6MHz

Frequency(MHz)	Peak ERP(dBm)	Path Loss	Antenna Gain	Correction	P _{Mea} (dBm)	Limit (dBm)	Polarization
				(dBm)			
1695.57	-51.41	3.40	-5.24	2.15	-51.72	-13.00	H
3391.23	-46.07	5.45	-7.64	2.15	-46.03	-13.00	V
4236.99	-55.83	6.69	-8.64	2.15	-56.03	-13.00	V
5423.70	-65.51	6.49	-9.95	2.15	-64.20	-13.00	V
5931.38	-50.49	6.81	-10.17	2.15	-49.28	-13.00	H
7726.01	-63.50	9.93	-11.63	2.15	-63.95	-13.00	H

WCDMA BAND IV Mode Channel 1312/1712.4MHz

Frequency(MHz)	Peak EIRP(dBm)	Path Loss	Antenna Gain	P _{Mea} (dBm)	Limit (dBm)	Polarization
3422.43	-34.89	5.54	-7.71	-32.72	-13.00	V
4224.76	-54.18	6.80	-8.63	-52.35	-13.00	H
5133.46	-45.52	6.57	-9.78	-42.31	-13.00	H
6844.83	-50.80	9.27	-10.94	-49.13	-13.00	V
7761.16	-66.44	10.11	-11.66	-64.89	-13.00	V
10126.10	-62.94	8.47	-12.43	-58.98	-13.00	V

WCDMA BAND IV Mode Channel 1450/1740MHz

Frequency(MHz)	Peak EIRP(dBm)	Path Loss	Antenna Gain	P _{Mea} (dBm)	Limit (dBm)	Polarization
3481.98	-30.32	5.49	-7.86	-27.95	-13.00	V
5223.01	-43.53	6.53	-9.83	-40.23	-13.00	V
6963.89	-49.53	9.37	-11.06	-47.84	-13.00	V
10102.93	-63.01	8.45	-12.42	-59.04	-13.00	V
13238.25	-61.32	8.50	-13.54	-56.28	-13.00	V
16352.21	-59.10	9.38	-12.58	-55.90	-13.00	V

WCDMA BAND IV Mode Channel 1513/1752.6MHz

Frequency(MHz)	Peak EIRP(dBm)	Path Loss	Antenna Gain	P _{Mea} (dBm)	Limit (dBm)	Polarization
3502.76	-37.13	5.41	-7.90	-34.64	-13.00	V
4305.10	-53.32	6.78	-8.68	-51.42	-13.00	H
5254.56	-48.39	6.81	-9.85	-45.35	-13.00	H
7005.52	-52.83	9.38	-11.10	-51.11	-13.00	V
9085.68	-64.48	8.46	-12.60	-60.34	-13.00	H
14470.63	-56.44	8.84	-13.62	-51.66	-13.00	V

A.3 CONDUCTED EMISSION (§15.107§15.207)

The measurement procedure in ANSI C63.4-2003 is used. Conducted Emission is measured with travel charger.


A.3.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi -Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency

A.3.2 Measurement result

WCDMA Band II

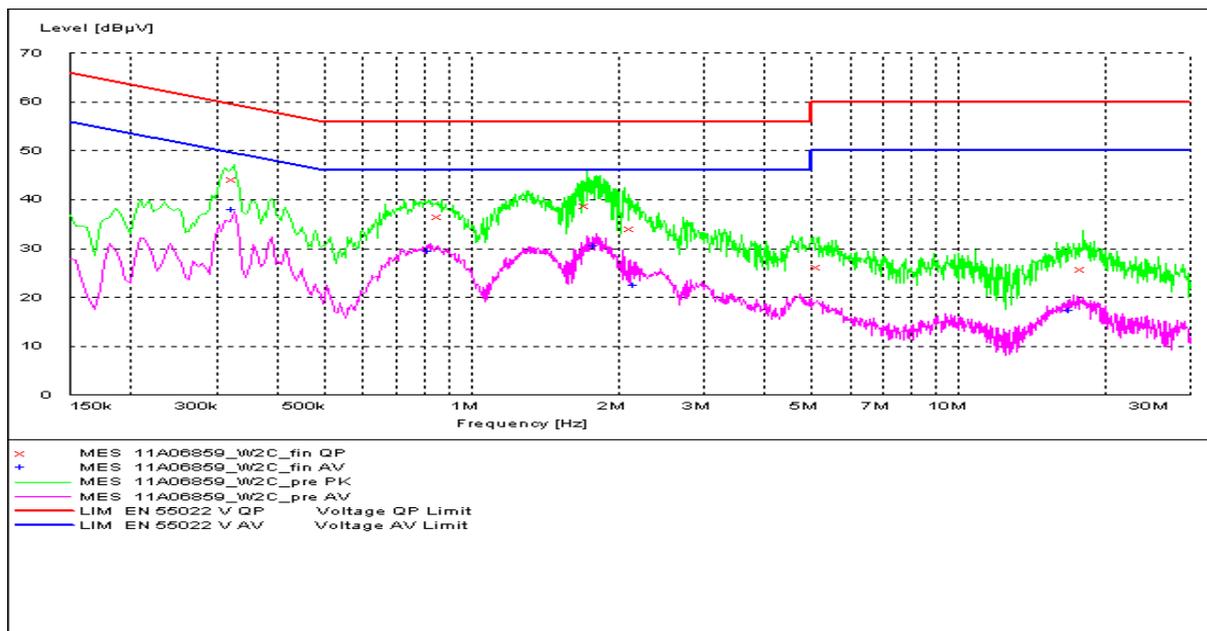


MEASUREMENT RESULT: "11A06859_W2C_fin QP"

Frequency MHz	Level dB μ V	Transd	Limit dB	Margin dB μ V	Line	PE
0.325500	44.10	10.1	60	15.5	N	GND
0.865500	36.60	10.1	56	19.4	L1	GND
1.729500	38.70	10.1	56	17.3	L1	GND
2.133972	34.10	10.1	56	21.9	L1	GND
5.159192	26.20	10.2	60	33.8	L1	GND
18.041109	25.80	10.3	60	34.2	L1	GND

MEASUREMENT RESULT: "11A06859_W2C_fin AV"

Frequency MHz	Level dB μ V	Transd	Limit dB	Margin dB μ V	Line	PE
0.325500	37.90	10.1	50	11.7	N	GND
0.825000	29.40	10.1	46	16.6	N	GND
1.810500	30.40	10.1	46	15.6	L1	GND
2.187858	22.50	10.1	46	23.5	L1	GND
17.163372	17.20	10.3	50	32.8	L1	GND

WCDMA Band V

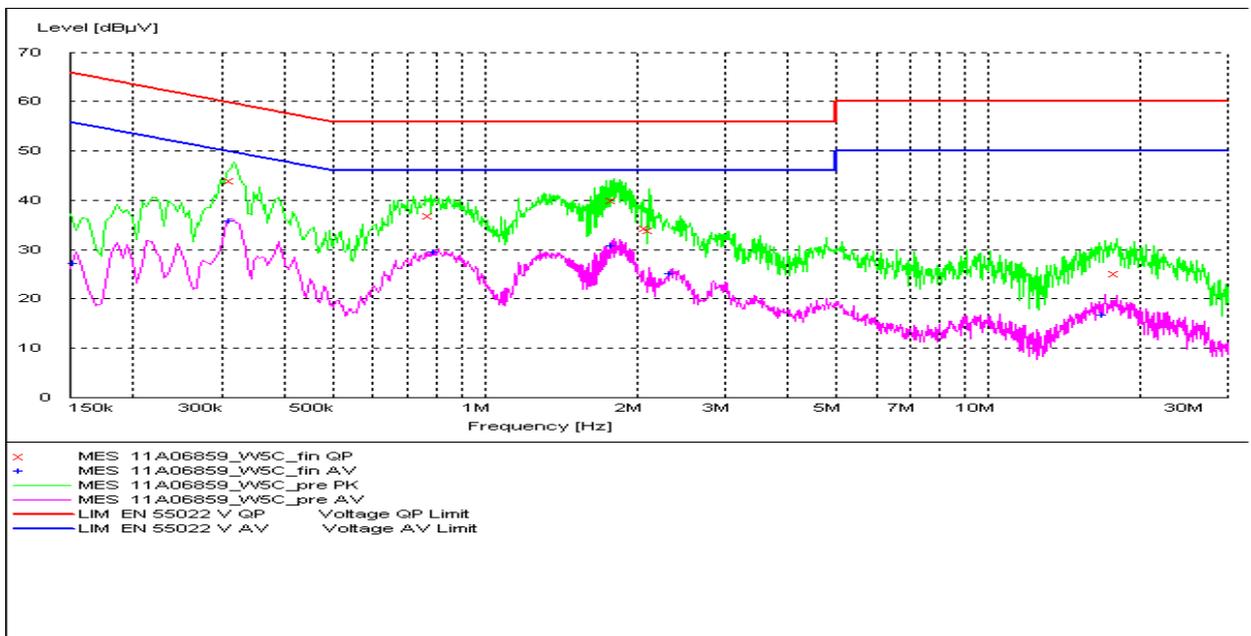


MEASUREMENT RESULT: "11A06859_W5C_fin QP"

Frequency MHz	Level dB μ V	Transd	Limit dB	Margin dB μ V	Line	PE
0.316500	44.00	10.1	60	15.8	L1	GND
0.780000	36.90	10.1	56	19.1	L1	GND
1.810500	40.10	10.1	56	15.9	L1	GND
2.112792	34.40	10.1	56	21.6	L1	GND
2.133972	34.00	10.1	56	22.0	L1	GND
18.041109	25.20	10.3	60	34.8	L1	GND

MEASUREMENT RESULT: "11A06859_W5C_fin AV"

Frequency MHz	Level dB μ V	Transd	Limit dB	Margin dB μ V	Line dB	PE
0.154500	27.30	10.1	56	28.5	N	GND
0.316500	35.90	10.1	50	13.9	N	GND
0.807000	29.50	10.1	46	16.5	N	GND
1.810500	30.80	10.1	46	15.2	L1	GND
2.369606	25.10	10.1	46	20.9	N	GND
17.077982	16.80	10.3	50	33.2	L1	GND

WCDMA Band IV

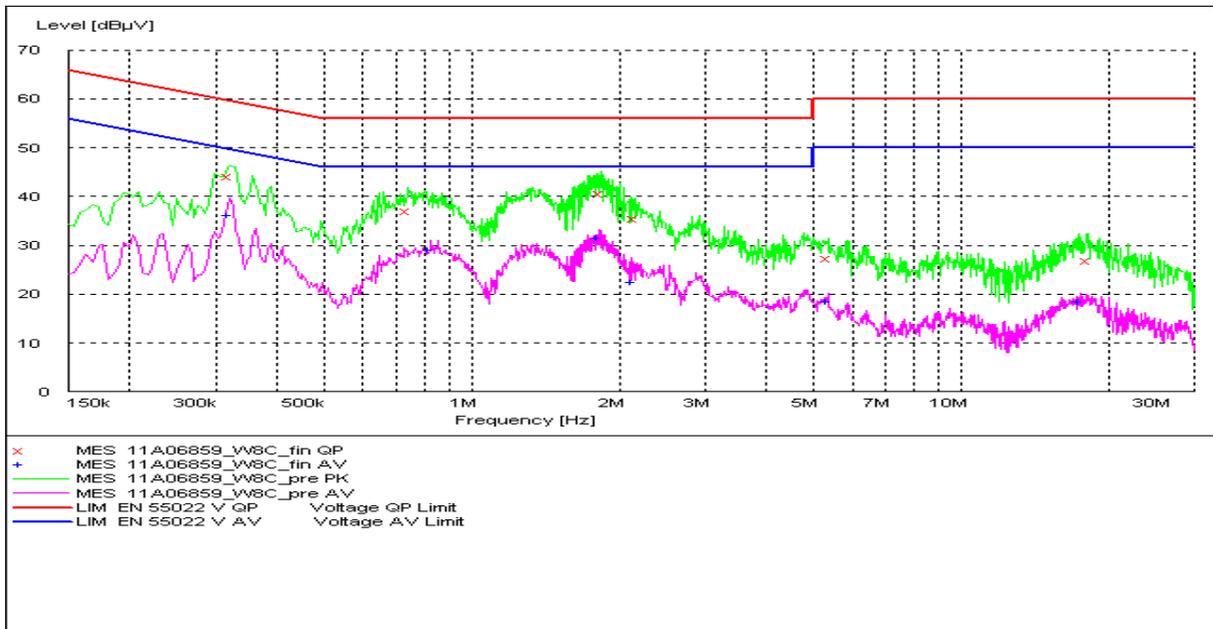

MEASUREMENT RESULT: "11A06859_W8C_fin QP"

Frequency MHz	Level dB μ V	Transd	Limit dB	Margin dB μ V	Line dB	PE
0.321000	44.20	10.1	60	15.4	L1	GND
0.744000	37.10	10.1	56	18.9	L1	GND
1.837500	40.60	10.1	56	15.4	L1	GND
2.166142	35.60	10.1	56	20.4	L1	GND
5.342495	27.40	10.2	60	32.6	L1	GND
18.221971	26.80	10.3	60	33.2	L1	GND

MEASUREMENT RESULT: "11A06859_W8C_fin AV"

Frequency MHz	Level dB μ V	Transd	Limit dB	Margin dB μ V	Line dB	PE
0.321000	36.10	10.1	50	13.5	N	GND
0.825000	29.20	10.1	46	16.8	N	GND
1.819500	31.50	10.1	46	14.5	L1	GND
2.144642	22.40	10.1	46	23.6	N	GND
5.342495	18.60	10.2	50	31.4	L1	GND
17.509222	18.50	10.3	50	31.5	L1	GND

A.4 FREQUENCY STABILITY (\$2.1055/\$24.235/\$27.54)

A.4.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 9400 for WCDMA Band II, channel 4183 for WCDMA Band V, and channel 1450 for WCDMA BAND IV measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.4.2 Measurement Limit

A.4.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

A.4.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the

fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

A.4.3 Measurement results

WCDMA Band II

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	-16	0.023
3.7	-19	0.027
4.2	-19	0.027

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-22	0.031
-20	-19	0.027
-10	-19	0.027
0	-16	0.023
10	-16	0.023
20	-16	0.023
30	-19	0.027
40	-19	0.027
50	-22	0.031

WCDMA Band V

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	-15	0.020
3.7	-13	0.017
4.2	-12	0.016

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-15	0.020
-20	-13	0.017
-10	-13	0.017
0	-12	0.016
10	-12	0.016
20	-12	0.016
30	-13	0.017
40	-13	0.017
50	-15	0.020

WCDMA Band IV

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	-12	0.016
3.7	-9	0.012
4.2	-10	0.013

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-12	0.016
-20	-10	0.013
-10	-10	0.013
0	-9	0.012
10	-9	0.012
20	-9	0.012
30	-10	0.013
40	-10	0.013
50	-12	0.016

A.5 OCCUPIED BANDWIDTH (§2.1049(h)(i))

A.5.1 Occupied Bandwidth Results


Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of WCDMA Band II, WCDMA Band IV and WCDMA Band V . The table below lists the measured -20dBc BW. Spectrum analyzer plots are included on the following pages.

WCDMA Band II(-20dBc)

Frequency(MHz)	Occupied Bandwidth (-20dBc BW)(MHz)
1852.4	4.551
1880.0	4.567
1907.6	4.551


WCDMA Band II

Channel 9262-Occupied Bandwidth (-20dBc BW)

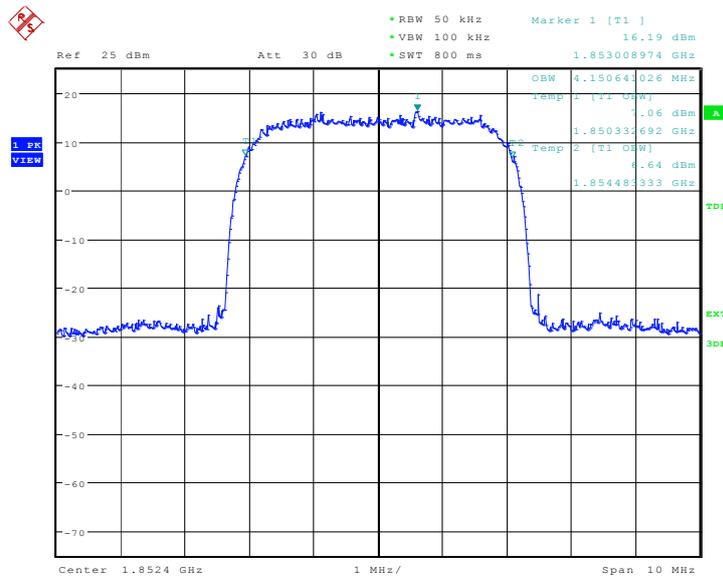


Date: 10.OCT.2011 08:34:01

Channel 9400-Occupied Bandwidth (-20dBc BW)

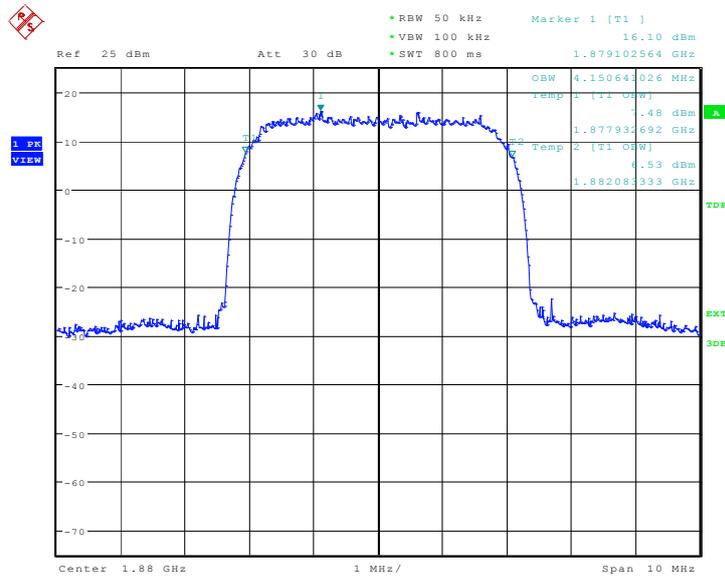

Channel 9538-Occupied Bandwidth (-20dBc BW)

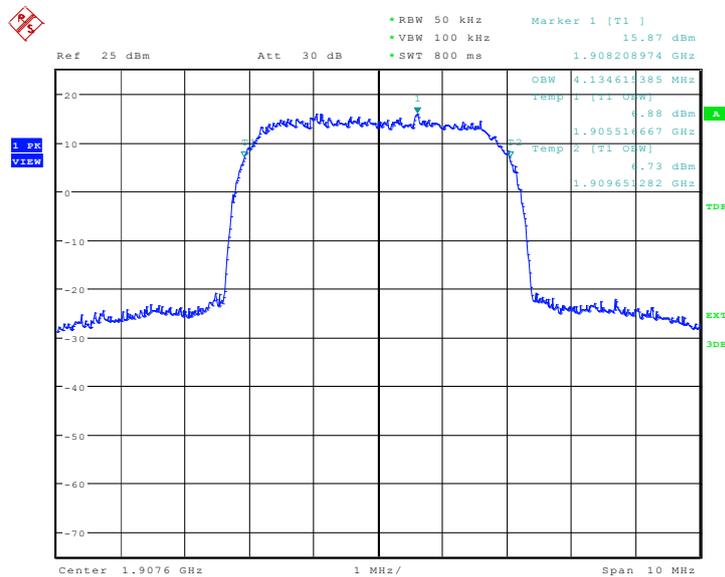


WCDMA Band IV(-20dBc)

Frequency(MHz)	Occupied Bandwidth (-20dBc BW)(MHz)
1712.4	4.150
1740	4.134
1752.6	4.134


WCDMA Band IV

Channel 1312-Occupied Bandwidth (-20dBc BW)

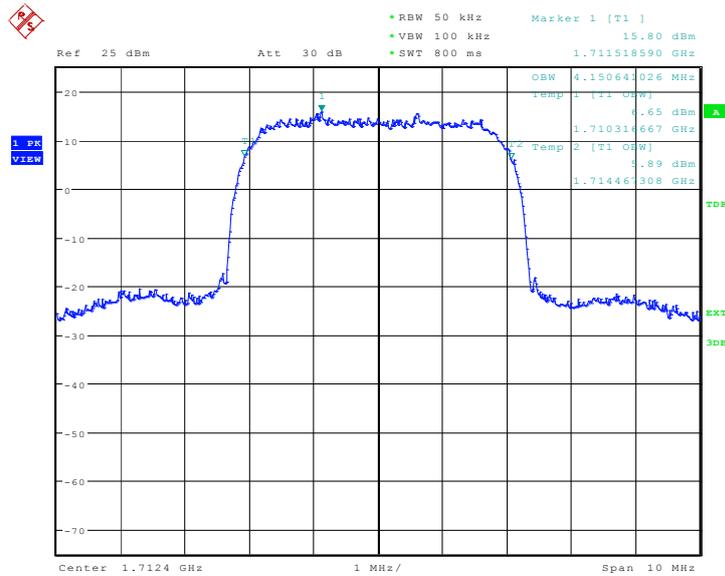


Date: 14.OCT.2011 07:01:56

Channel 1450-Occupied Bandwidth (-20dBc BW)

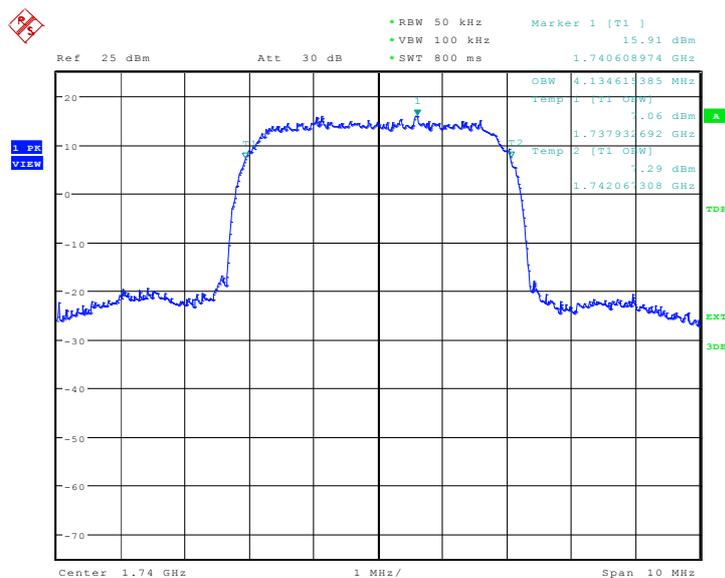

Date: 14.OCT.2011 07:02:30

Channel 1513-Occupied Bandwidth (-20dBc BW)

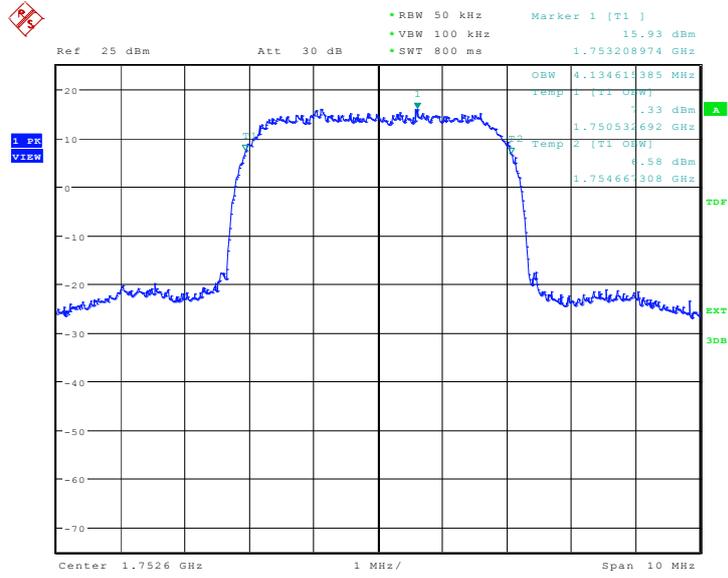


Date: 14.OCT.2011 07:03:05

WCDMA Band V(-20dBc)

Frequency(MHz)	Occupied Bandwidth (-20dBc BW)(MHz)
826.4	4.551
836.6	4.551
846.6	4.535


WCDMA Band V

Channel 4132-Occupied Bandwidth (-20dBc BW)

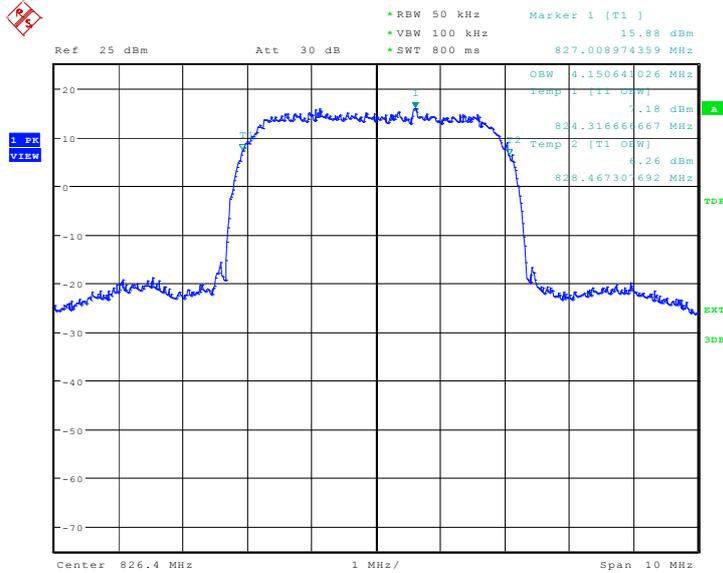


Date: 11.OCT.2011 06:15:47

Channel 4183-Occupied Bandwidth (-20dBc BW)

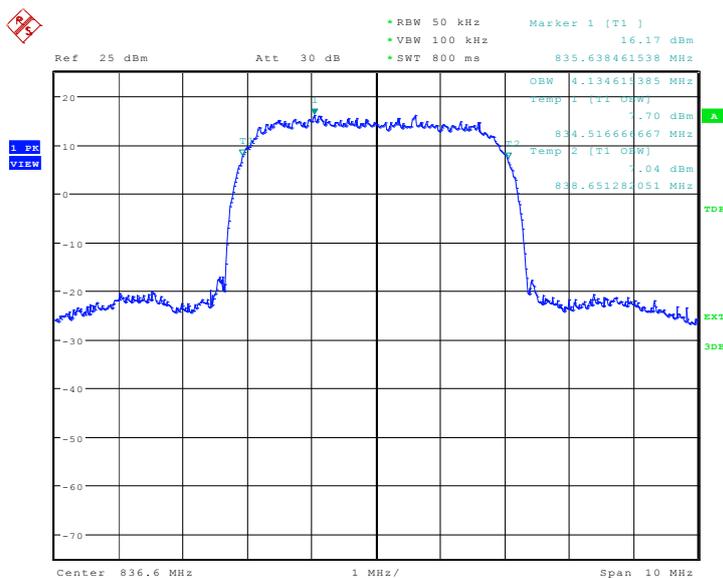

Date: 11.OCT.2011 06:16:22

Channel 4233-Occupied Bandwidth (-20dBc BW)

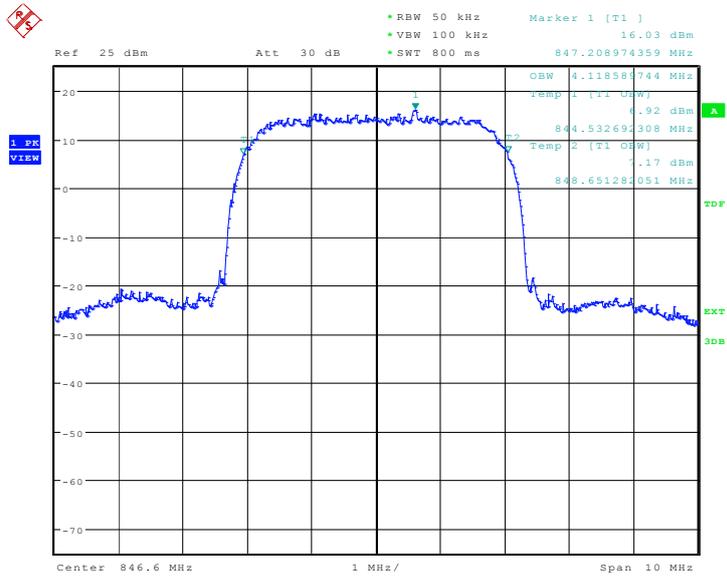

Date: 11.OCT.2011 06:16:56

A.6 EMISSION BANDWIDTH (§22.917(b)/§24.238(b))

A.6.1 Emission Bandwidth Results


Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the WCDMA Band II, WCDMA Band IV and WCDMA Band V. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

WCDMA Band II(-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(MHz)
1852.4	4.647
1880.0	4.647
1907.6	4.647


WCDMA Band II

Channel 9262-Occupied Bandwidth (-26dBc BW)

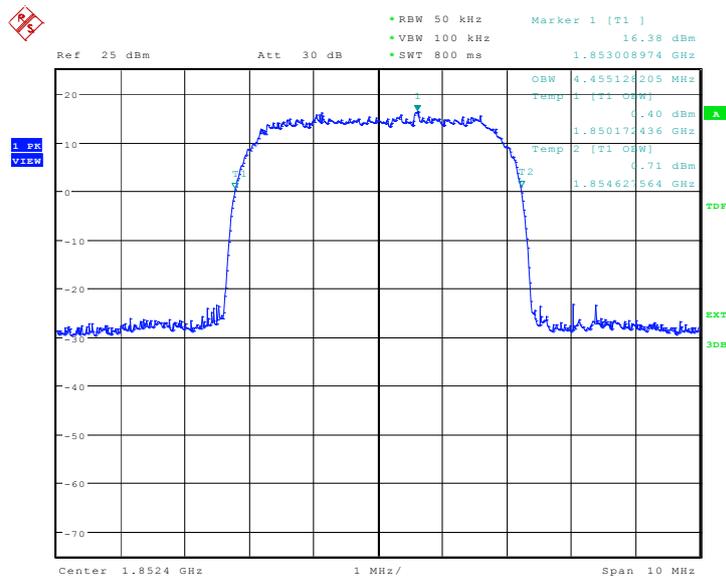


Date: 10.OCT.2011 08:35:46

Channel 9400-Occupied Bandwidth (-26dBc BW)

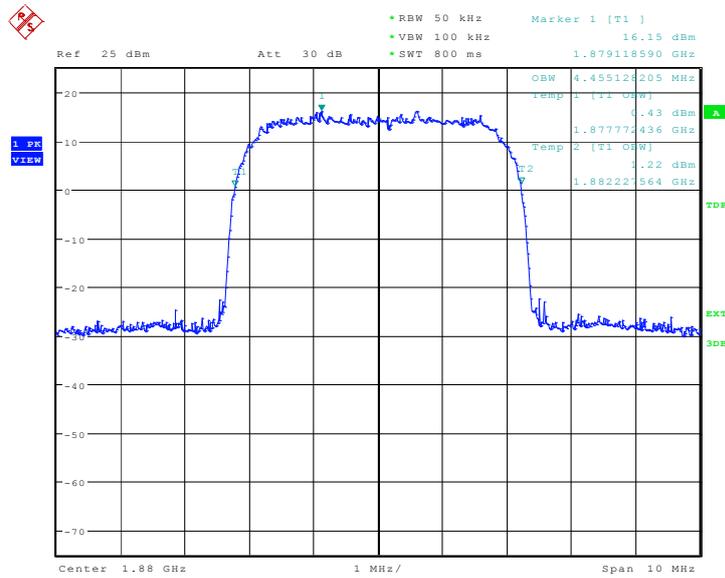

Date: 10.OCT.2011 08:36:21

Channel 9538-Occupied Bandwidth (-26dBc BW)

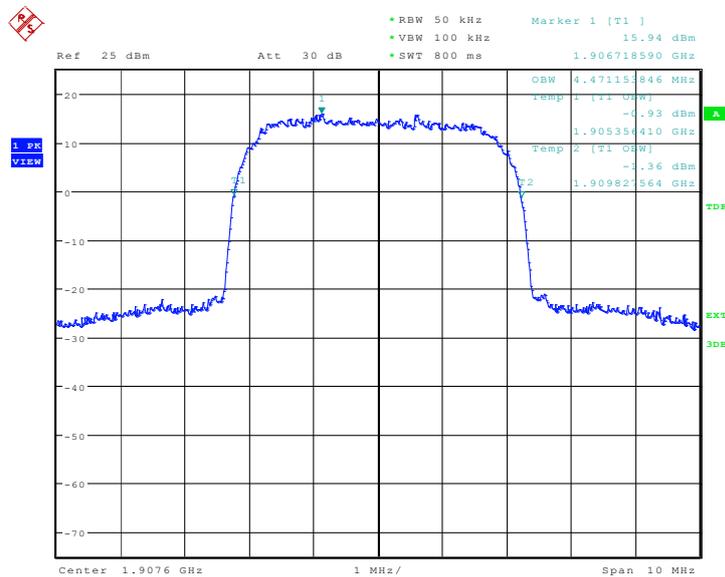


Date: 10.OCT.2011 08:36:55

WCDMA Band IV(-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(MHz)
1712.4	4.471
1740	4.471
1752.6	4.471


WCDMA Band IV

Channel 1312-Occupied Bandwidth (-26dBc BW)

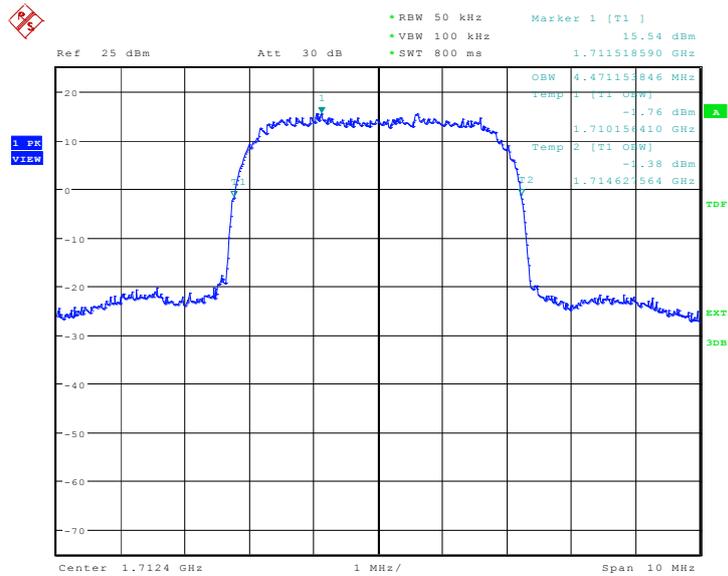


Date: 14.OCT.2011 07:03:41

Channel 1450-Occupied Bandwidth (-26dBc BW)

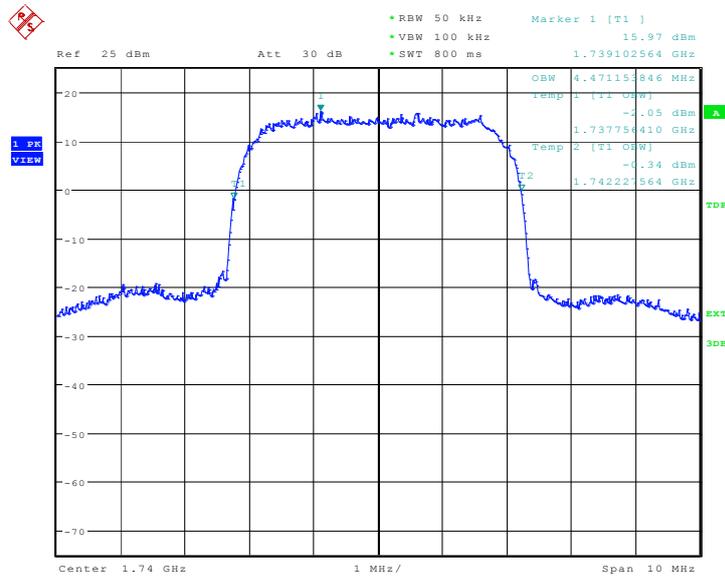

Date: 14.OCT.2011 07:04:15

Channel 1513-Occupied Bandwidth (-26dBc BW)

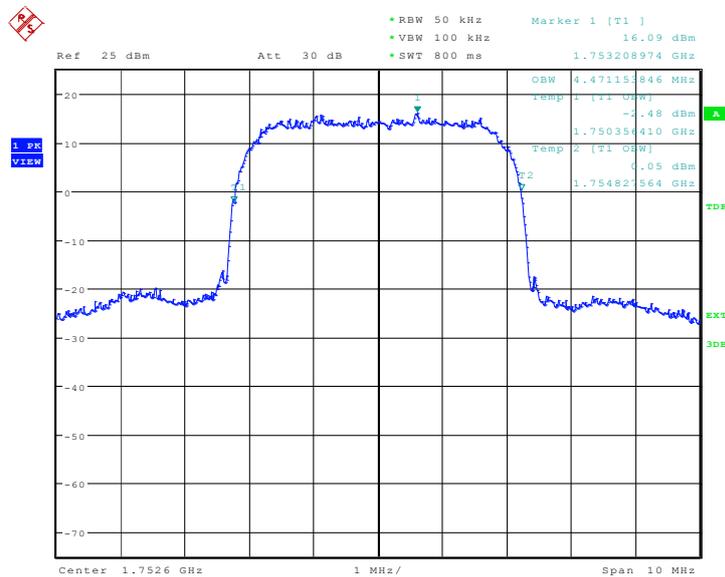


Date: 14.OCT.2011 07:04:50

WCDMA Band V(-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(MHz)
826.40	4.647
836.60	4.631
846.60	4.631


WCDMA Band V

Channel 4132-Occupied Bandwidth (-26dBc BW)

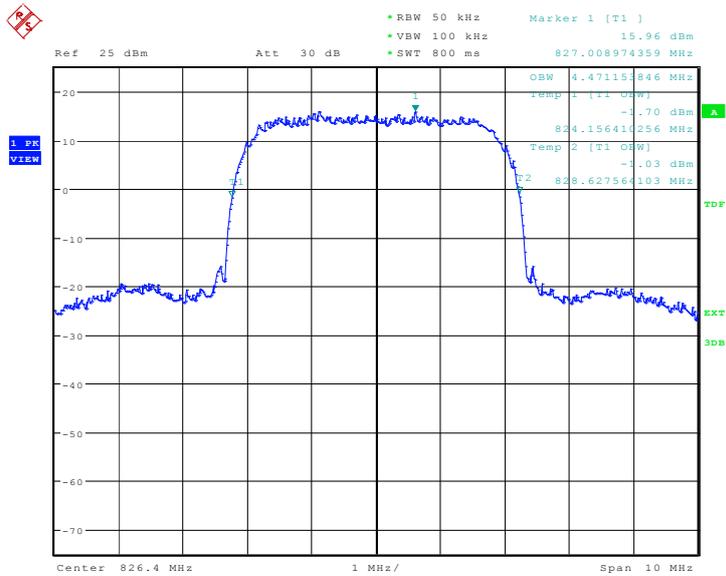


Date: 11.OCT.2011 06:17:32

Channel 4183-Occupied Bandwidth (-26dBc BW)

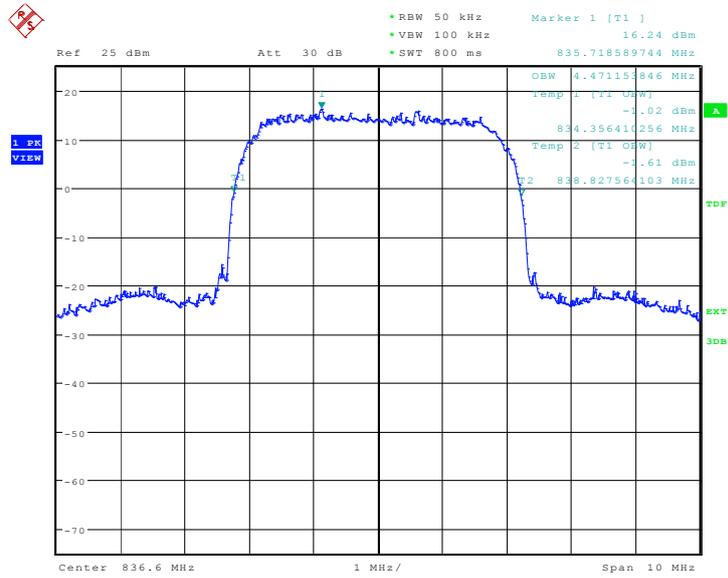

Date: 11.OCT.2011 06:18:07

Channel 4233-Occupied Bandwidth (-26dBc BW)

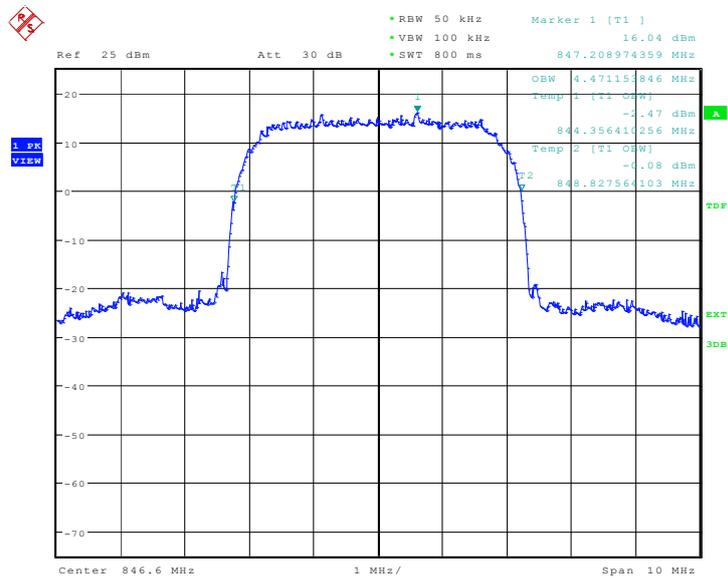


Date: 11.OCT.2011 06:18:41

A.7 BAND EDGE COMPLIANCE (§22.917(b)/§24.238(b))


WCDMA Band II

LOW BAND EDGE BLOCK-A (WCDMA Band II)-Channel 9262

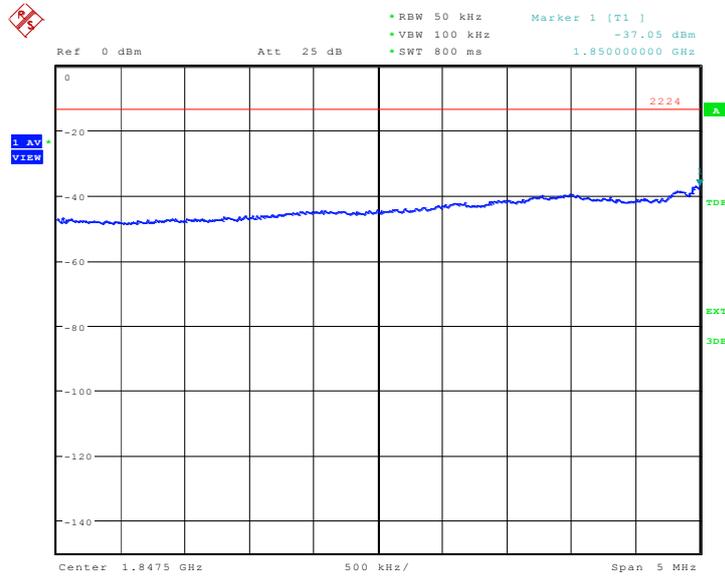


Date: 10.OCT.2011 08:44:09

HIGH BAND EDGE BLOCK-C (WCDMA Band II) -Channel 9538

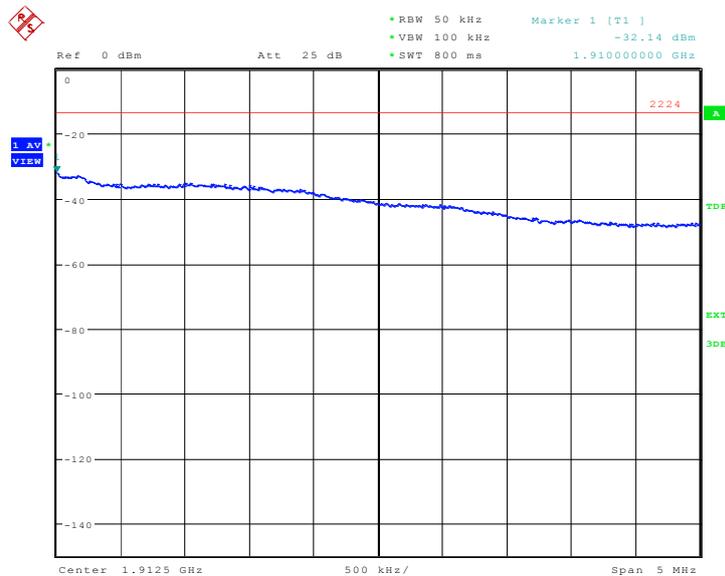


Date: 10.OCT.2011 08:44:20

**WCDMA Band IV
LOW BAND EDGE BLOCK-A (WCDMA Band IV)-Channel 1312**

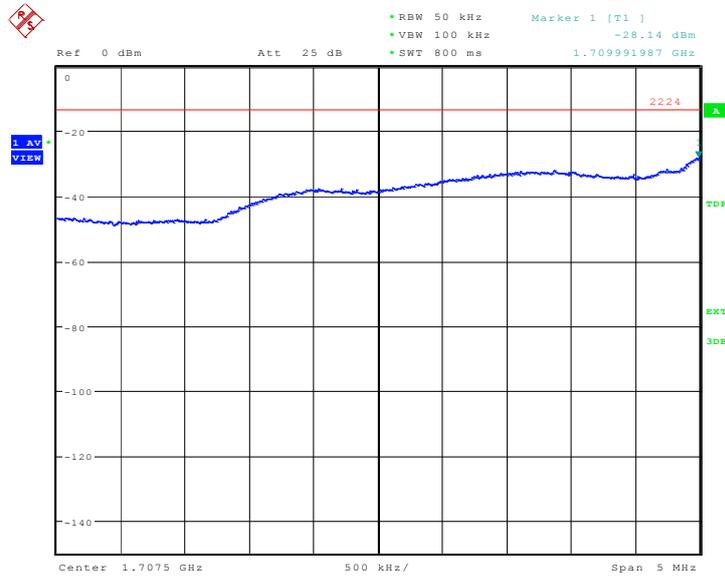


Date: 14.OCT.2011 07:05:01

HIGH BAND EDGE BLOCK-C (WCDMA Band IV) -Channel 1513

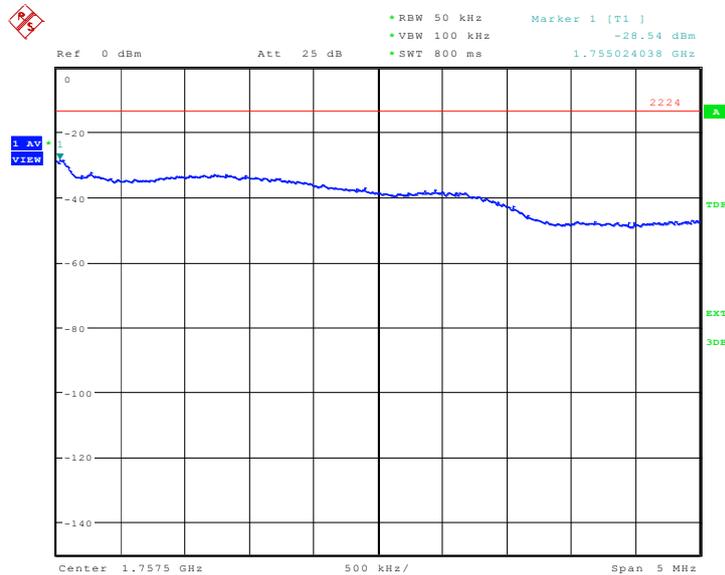


Date: 14.OCT.2011 07:05:12

WCDMA Band V
LOW BAND EDGE BLOCK-A (WCDMA Band V)-Channel 4132

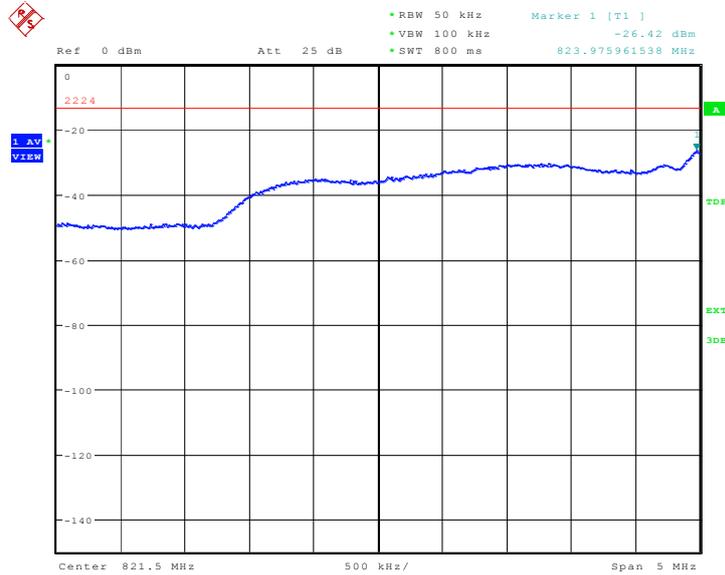

Date: 11.OCT.2011 06:25:54

HIGH BAND EDGE BLOCK-C (WCDMA Band V) -Channel 4233

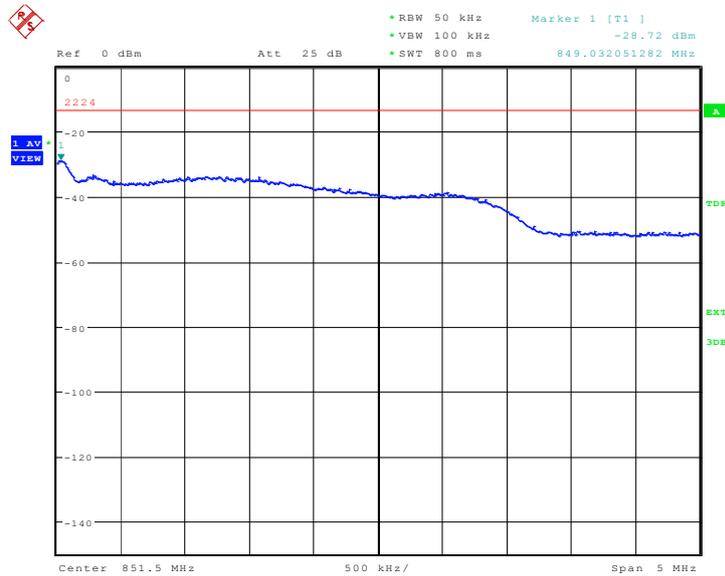

Date: 11.OCT.2011 06:26:05

A.8 CONDUCTED SPURIOUS EMISSION (§2.1057/§22.917/§24.238)

A.8.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of WCDMA Band II, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For WCDMA Band IV, data taken from 30 MHz to 20GHz. For WCDMA Band V, data taken from 30 MHz to 10GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

WCDMA Band II Transmitter

Channel	Frequency (MHz)
9262	1852.40
9400	1880.00
9538	1907.60

WCDMA Band IV Transmitter

Channel	Frequency (MHz)
1312	1712.40
1450	1740.00
1513	1752.60

WCDMA Band V Transmitter

Channel	Frequency (MHz)
4132	826.40
4183	836.60
4233	846.60

A. 8.2 Measurement Limit

Part 24.238, Part 22.917 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.8.3 Measurement result

WCDMA Band II

A.8.3.1 Channel 9262: 30MHz –1GHz

Spurious emission limit –13dBm.

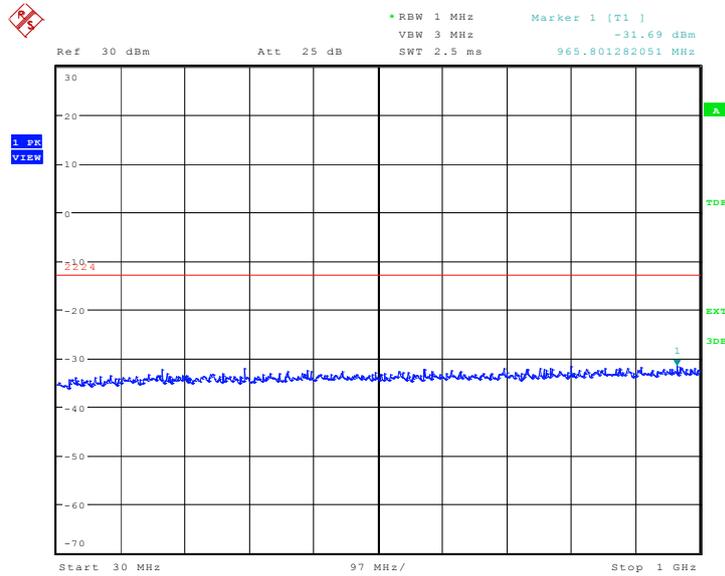


Date: 10.OCT.2011 08:44:51

A.8.3.2 Channel 9262: 1GHz –2.5GHz


Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

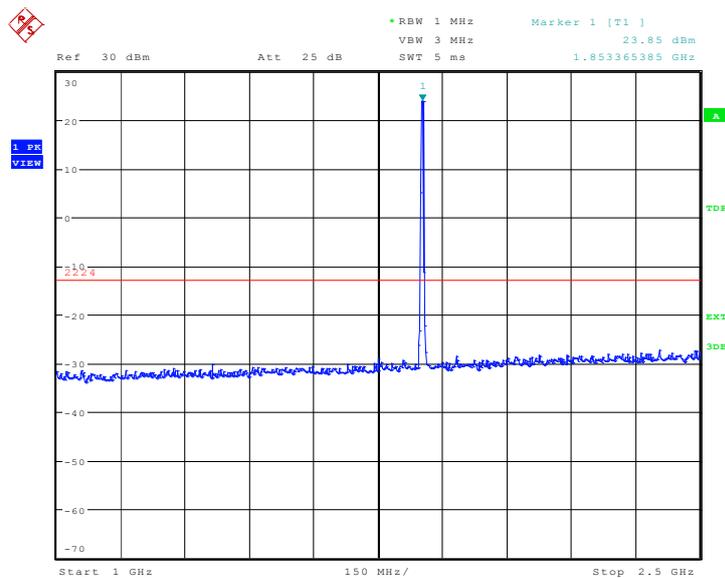


Date: 10.OCT.2011 08:45:19

A.8.3.3 Channel 9262: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

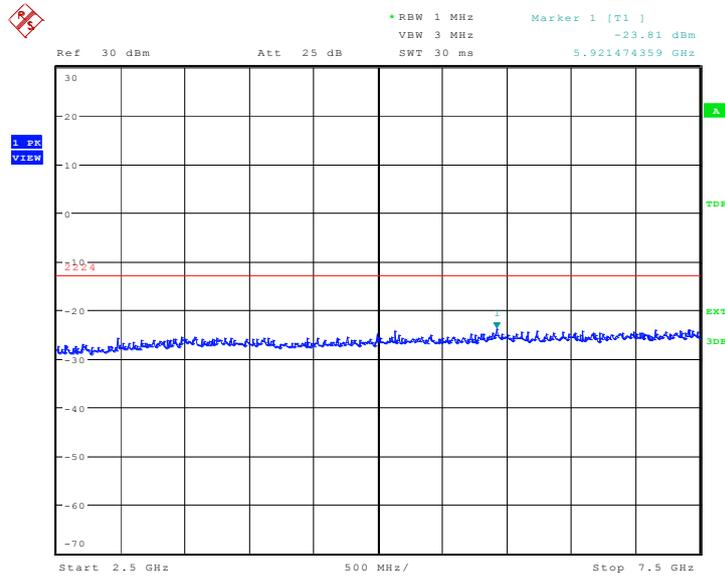


Date: 10.OCT.2011 08:45:47

A.8.3.4 Channel 9262: 7.5GHz –10GHz
Spurious emission limit –13dBm.

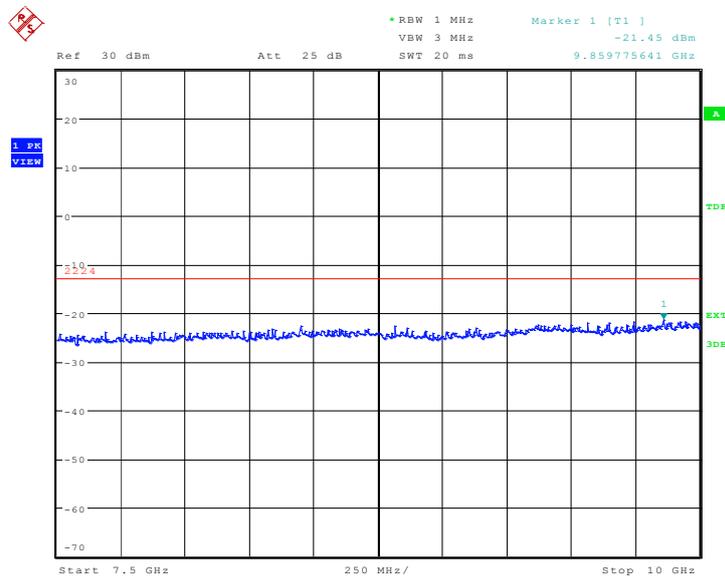


Date: 10.OCT.2011 08:46:16

A.8.3.5 Channel 9262: 10GHz –15GHz
Spurious emission limit –13dBm.

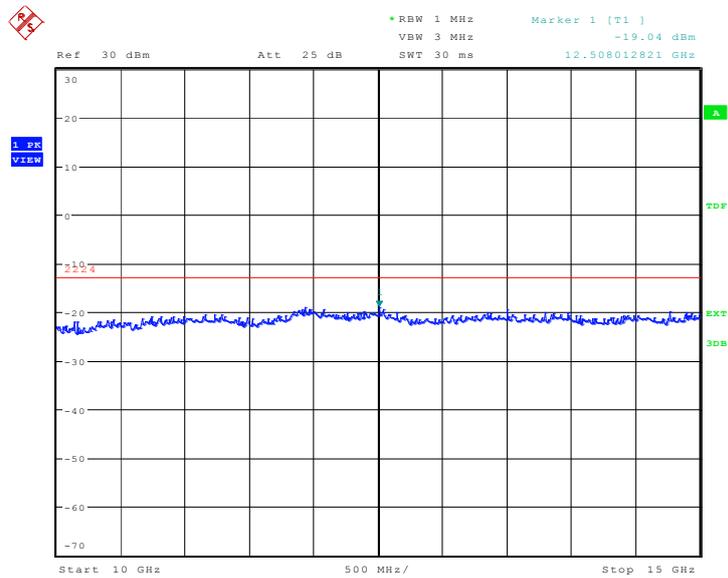


Date: 10.OCT.2011 08:46:44

A.8.3.6 Channel 9262: 15GHz –20GHz
Spurious emission limit –13dBm.

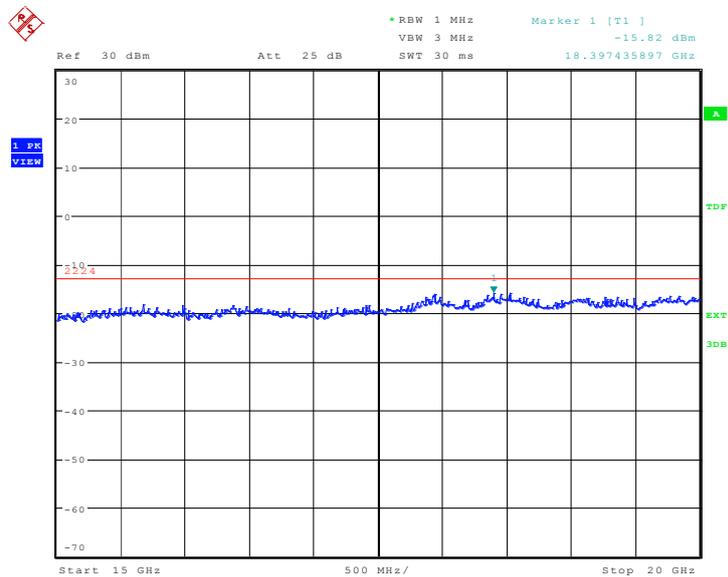

Date: 10.OCT.2011 08:47:12


A.8.3.7 Channel 9400: 30MHz –1GHz
Spurious emission limit –13dBm.

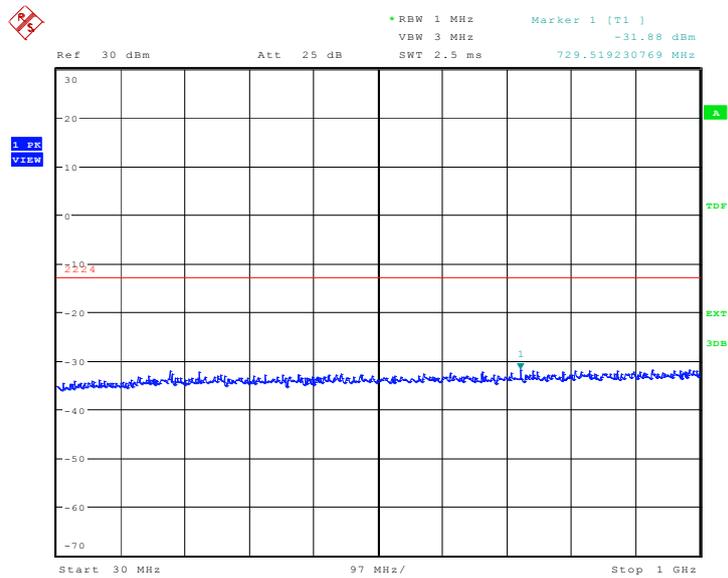

Date: 10.OCT.2011 08:47:43


A.8.3.8 Channel 9400: 1GHz –2.5GHz
Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

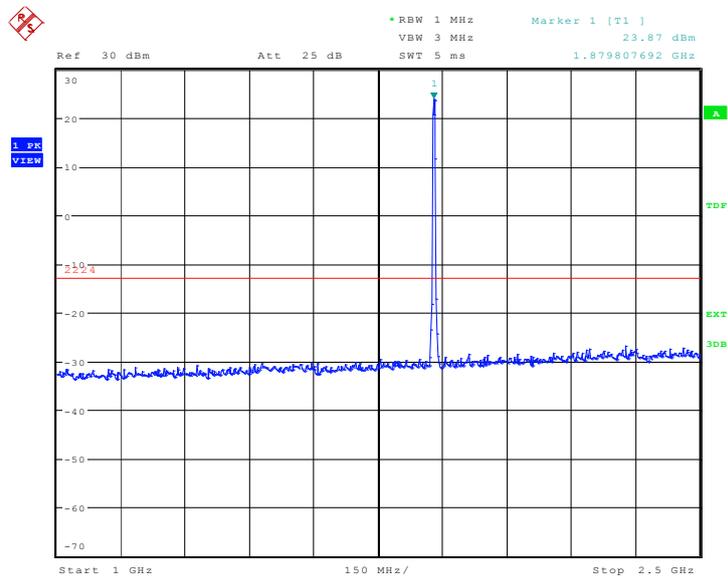


Date: 10.OCT.2011 08:48:11

A.8.3.9 Channel 9400: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

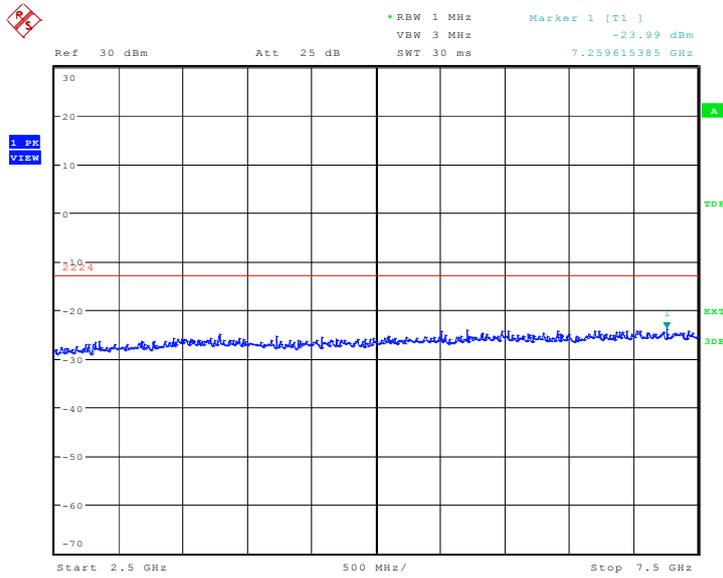


Date: 10.OCT.2011 08:48:39

A.8.3.10 Channel 9400: 7.5GHz –10GHz
Spurious emission limit –13dBm.

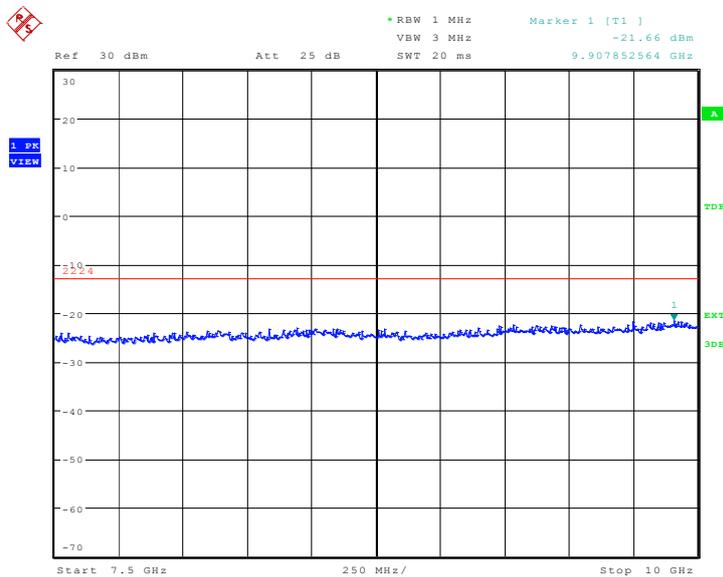


Date: 10.OCT.2011 08:49:08

A.8.3.11 Channel 9400: 10GHz –15GHz
Spurious emission limit –13dBm.

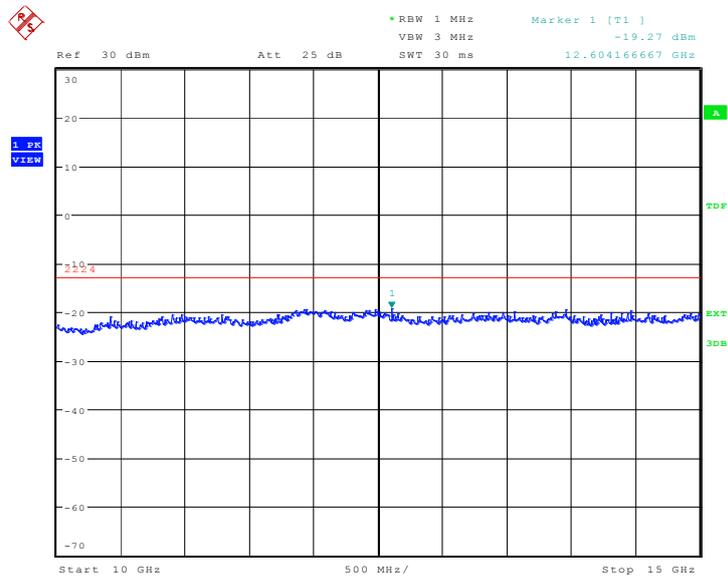


Date: 10.OCT.2011 08:49:36

A.8.3.12 Channel 9400: 15GHz –20GHz
Spurious emission limit –13dBm.

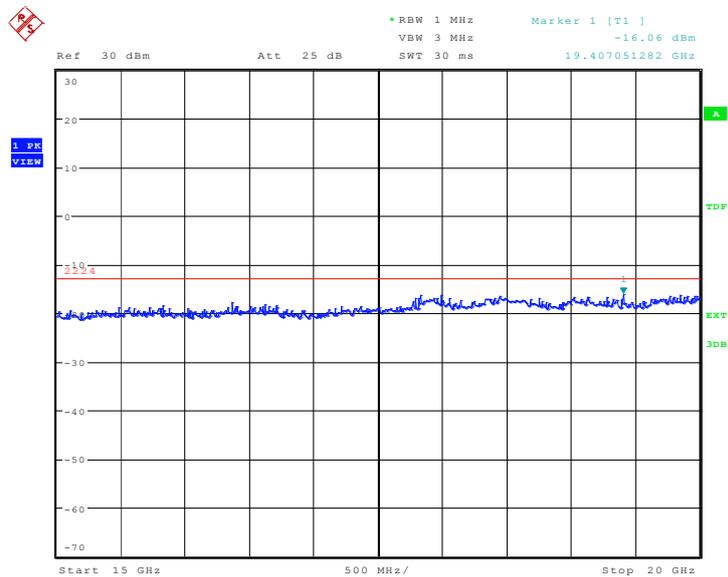

Date: 10.OCT.2011 08:50:04

A.8.3.13 Channel 9538: 30MHz –1GHz
Spurious emission limit –13dBm.

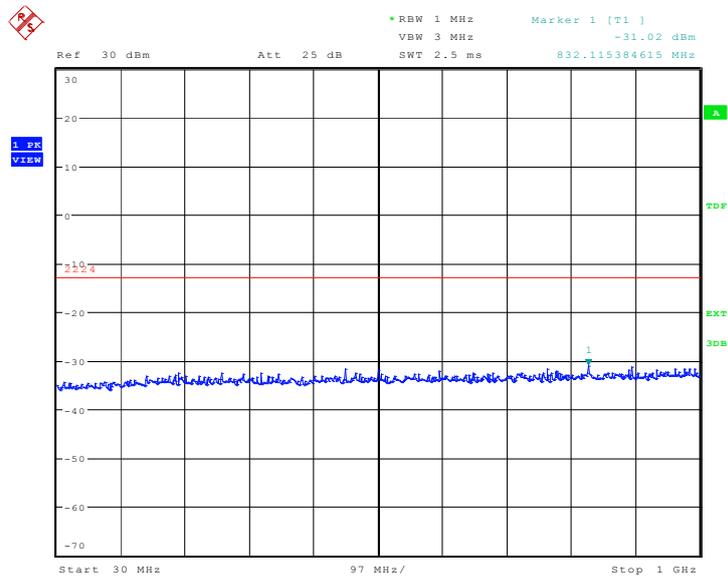


Date: 10.OCT.2011 08:50:35

A.8.3.14 Channel 9538: 1GHz –2.5GHz


Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

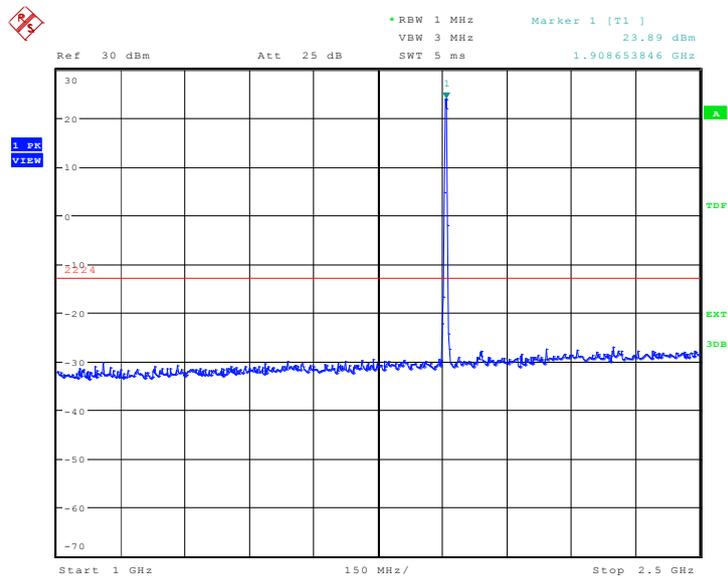


Date: 10.OCT.2011 08:51:04

A.8.3.15 Channel 9538: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

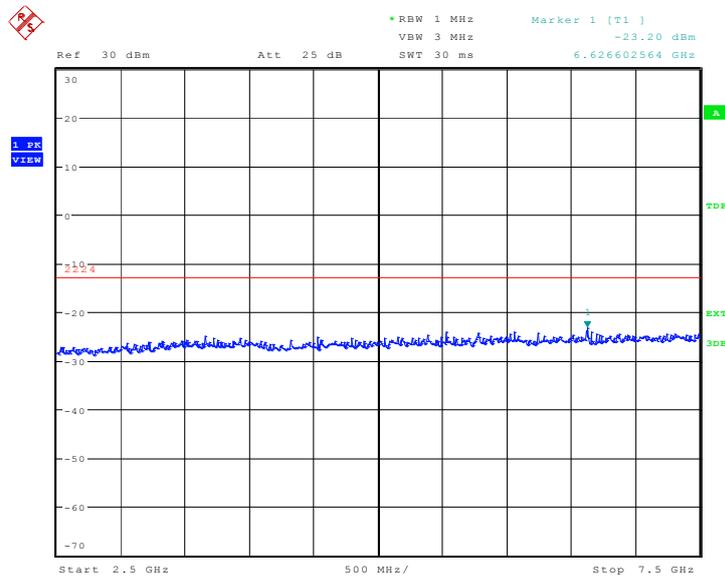


Date: 10.OCT.2011 08:51:32

A.8.3.16 Channel 9538: 7.5GHz –10GHz
Spurious emission limit –13dBm.

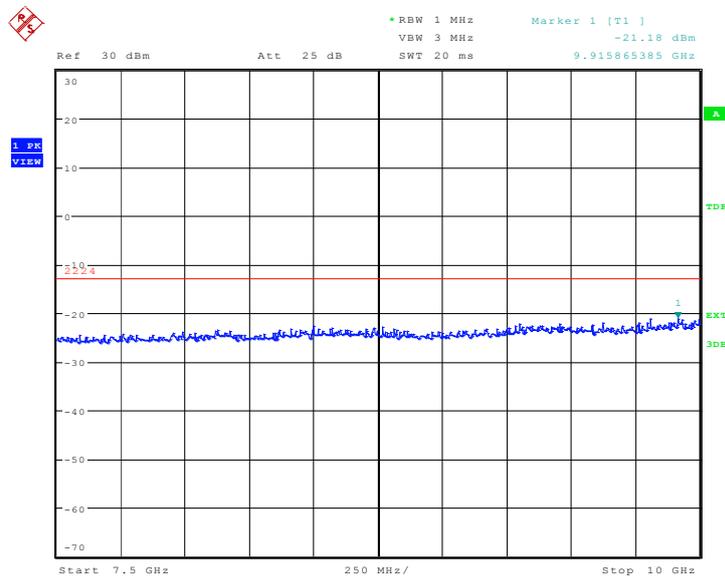


Date: 10.OCT.2011 08:52:00

A.8.3.17 Channel 9538: 10GHz –15GHz
Spurious emission limit –13dBm.

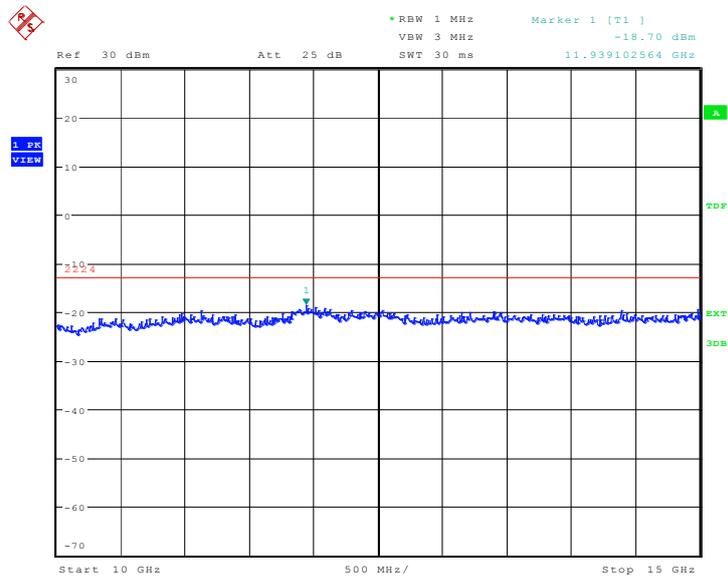


Date: 10.OCT.2011 08:52:29

A.8.3.18 Channel 9538: 15GHz –20GHz
Spurious emission limit –13dBm.

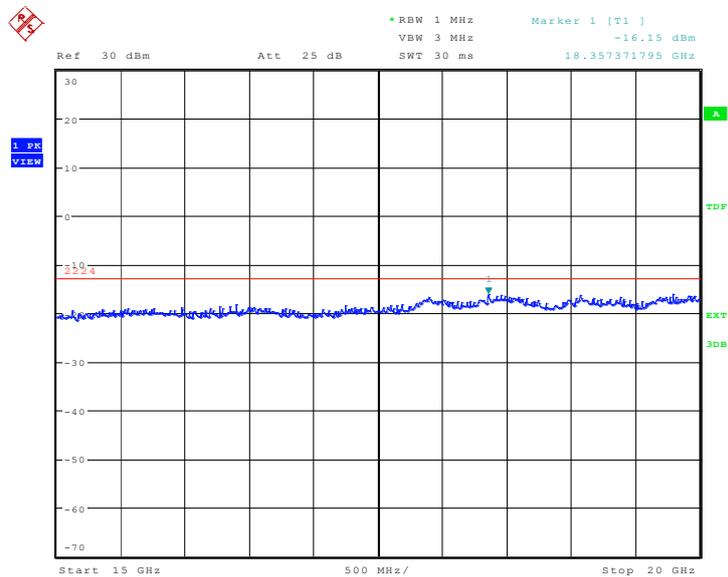


Date: 10.OCT.2011 08:52:57

A.8.3.19 Idle mode: 30MHz –1GHz
Spurious emission limit –13dBm.

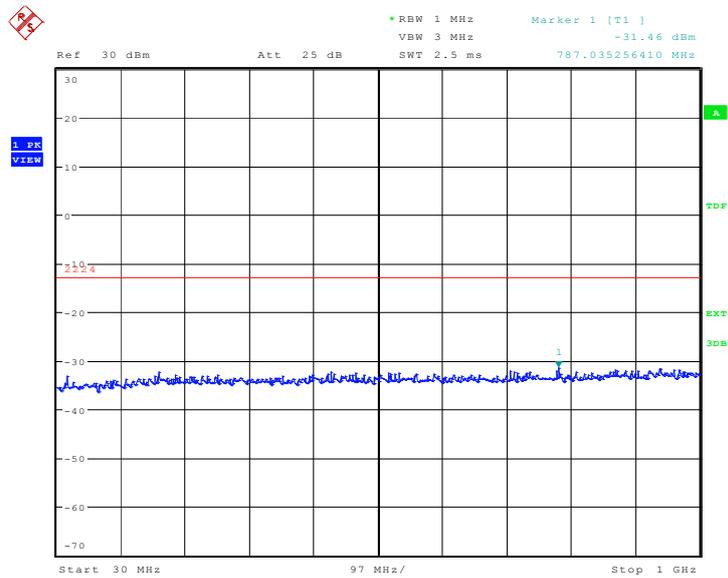


Date: 10.OCT.2011 08:53:26

A.8.3.20 Idle mode: 1GHz –2.5GHz
Spurious emission limit –13dBm.

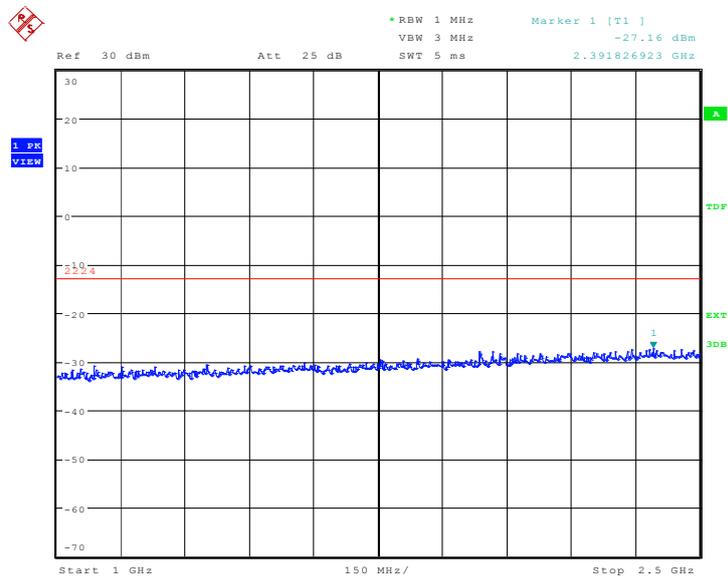


Date: 10.OCT.2011 08:53:54

A.8.3.21 Idle mode: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

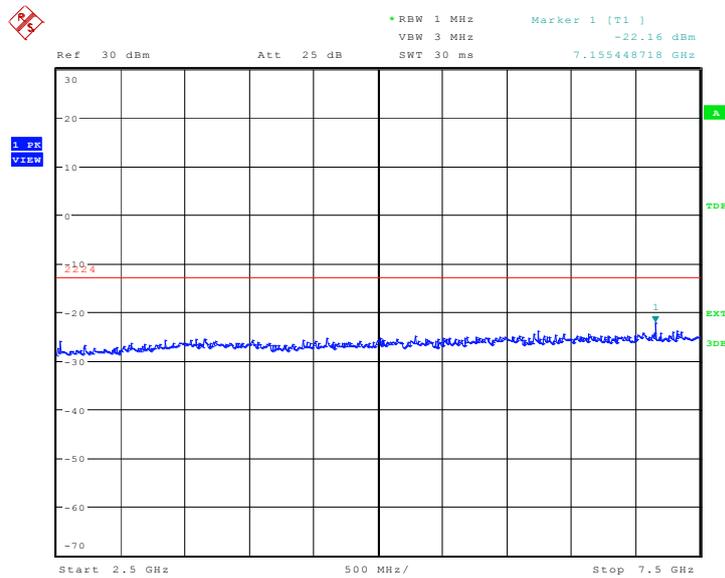


Date: 10.OCT.2011 08:54:23

A.8.3.22 Idle mode: 7.5GHz –10GHz
Spurious emission limit –13dBm.

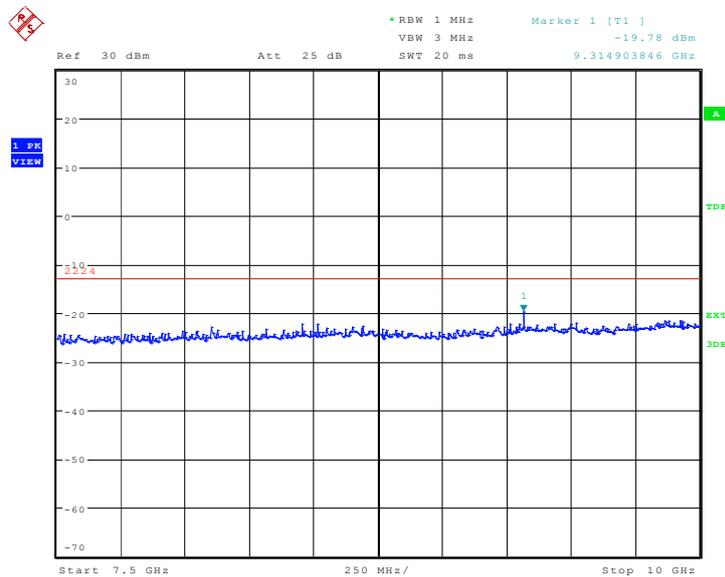


Date: 10.OCT.2011 08:54:51

A.8.3.23 Idle mode: 10GHz –15GHz
Spurious emission limit –13dBm.

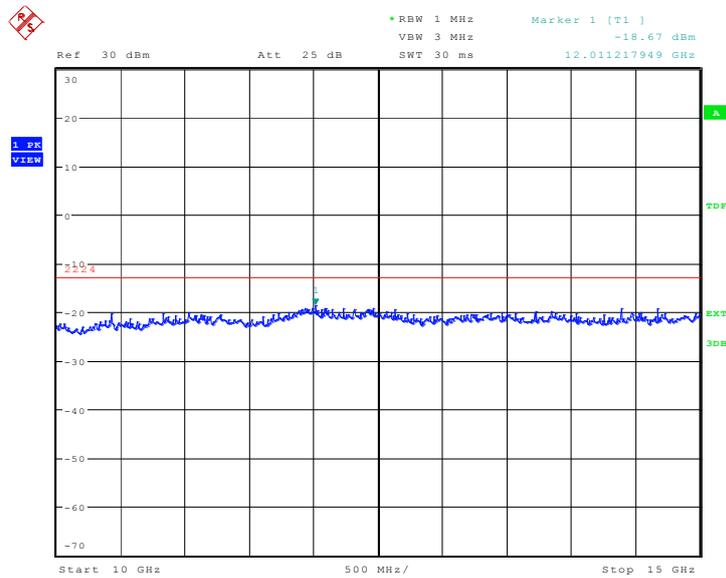

Date: 10.OCT.2011 08:55:19

A.8.3.24 Idle mode: 15GHz –20GHz
Spurious emission limit –13dBm.

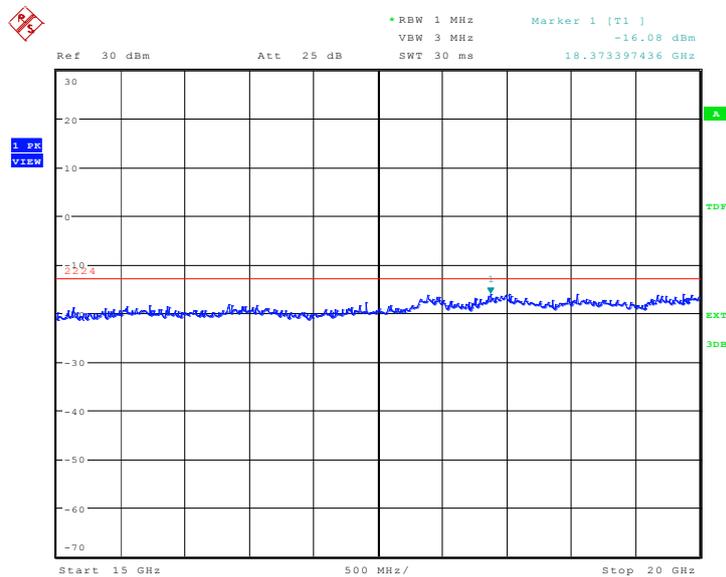


Date: 10.OCT.2011 08:55:47

WCDMA Band IV

A.8.3.25 Channel 1312: 30MHz –1GHz

Spurious emission limit –13dBm.

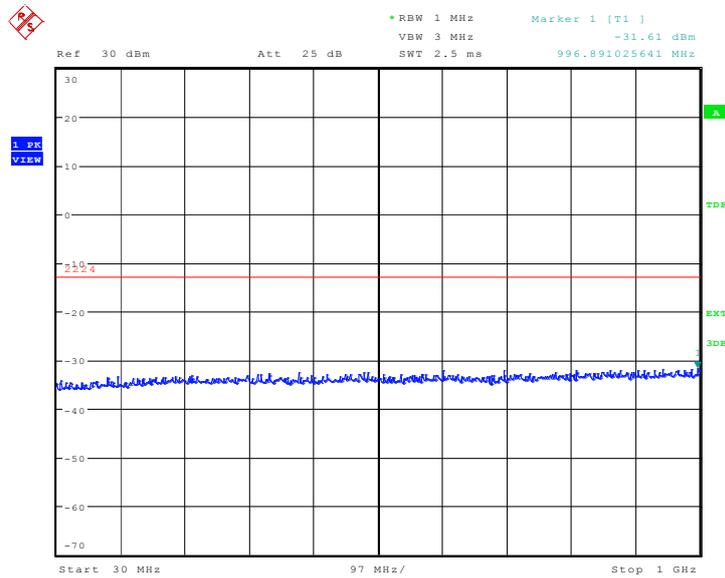


Date: 14.OCT.2011 07:05:43

A.8.3.26 Channel 1312: 1GHz –2.5GHz


Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

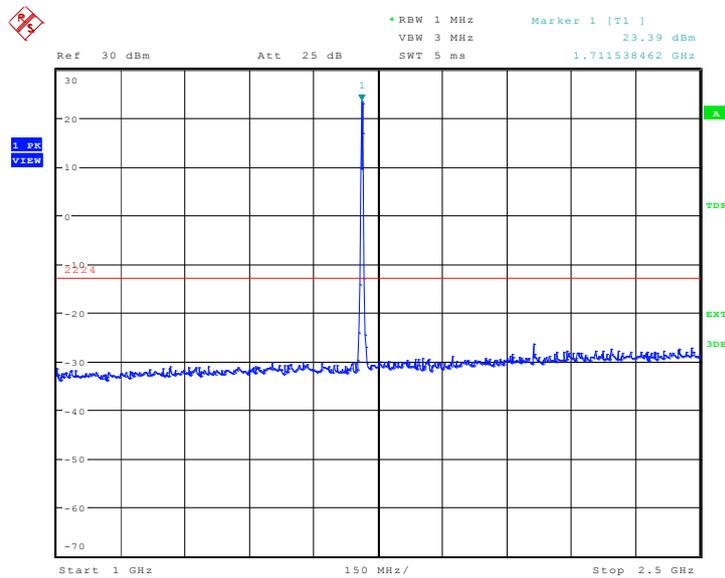


Date: 14.OCT.2011 07:06:12

A.8.3.27 Channel 1312: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

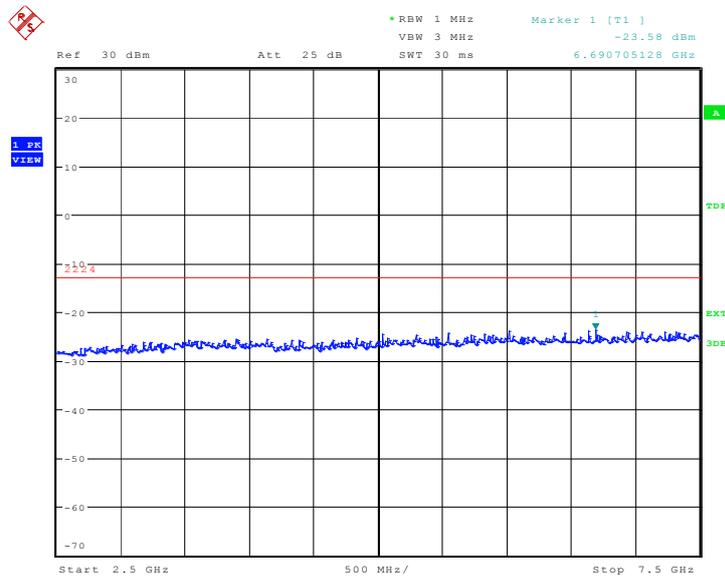


Date: 14.OCT.2011 07:06:40

A.8.3.28 Channel 1312: 7.5GHz –10GHz
Spurious emission limit –13dBm.

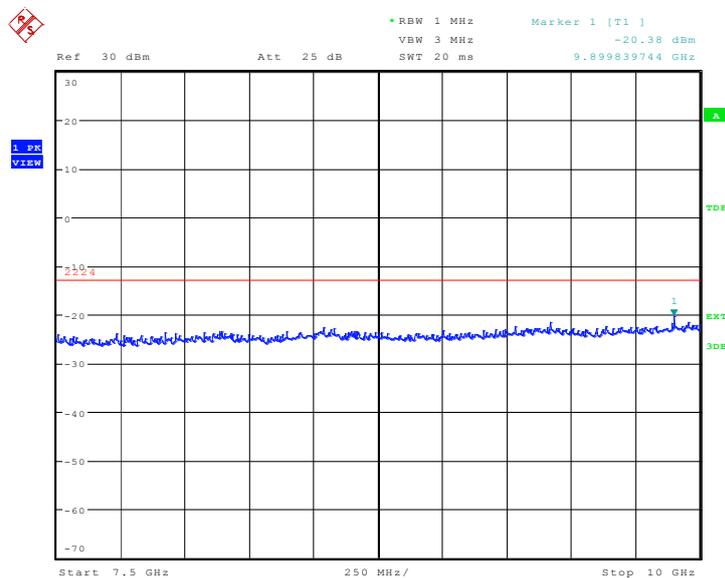


Date: 14.OCT.2011 07:07:08

A.8.3.29 Channel 1312: 10GHz –15GHz
Spurious emission limit –13dBm.

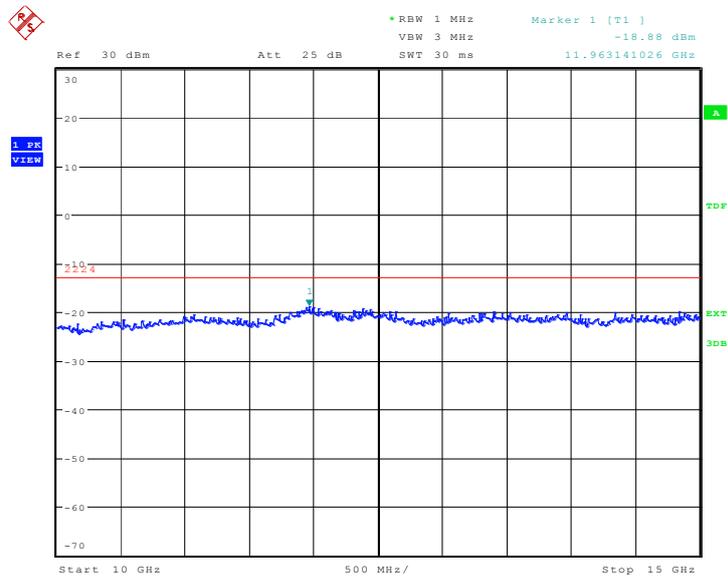


Date: 14.OCT.2011 07:07:37

A.8.3.30 Channel 1312: 15GHz –20GHz
Spurious emission limit –13dBm.

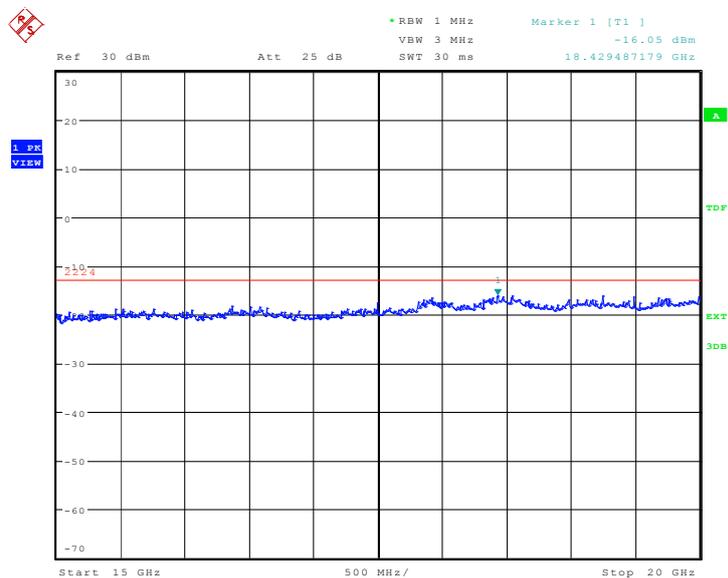

Date: 14.OCT.2011 07:08:05


A.8.3.31 Channel 1450: 30MHz –1GHz
Spurious emission limit –13dBm.

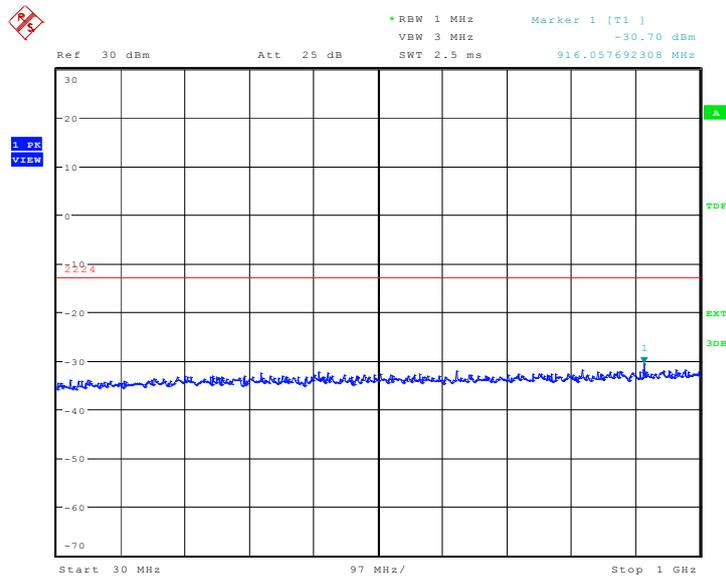

Date: 14.OCT.2011 07:08:36


A.8.3.32 Channel 1450: 1GHz –2.5GHz
Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

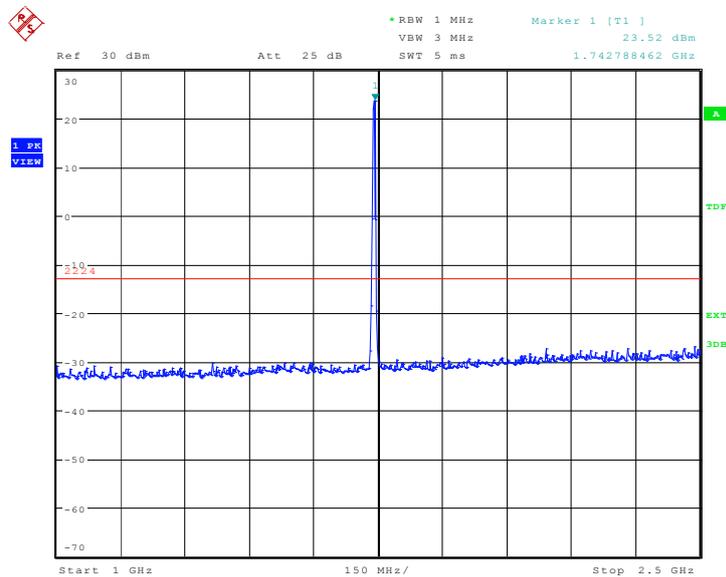


Date: 14.OCT.2011 07:09:04

A.8.3.33 Channel 1450: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

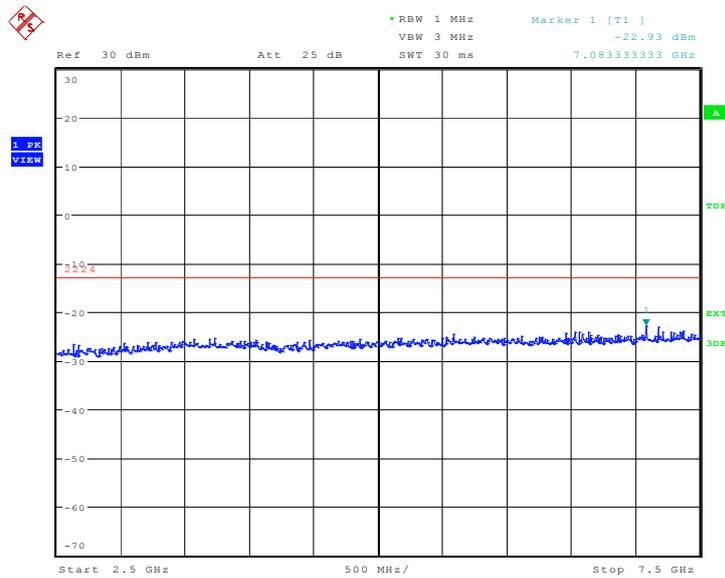


Date: 14.OCT.2011 07:09:33

A.8.3.34 Channel 1450: 7.5GHz –10GHz
Spurious emission limit –13dBm.

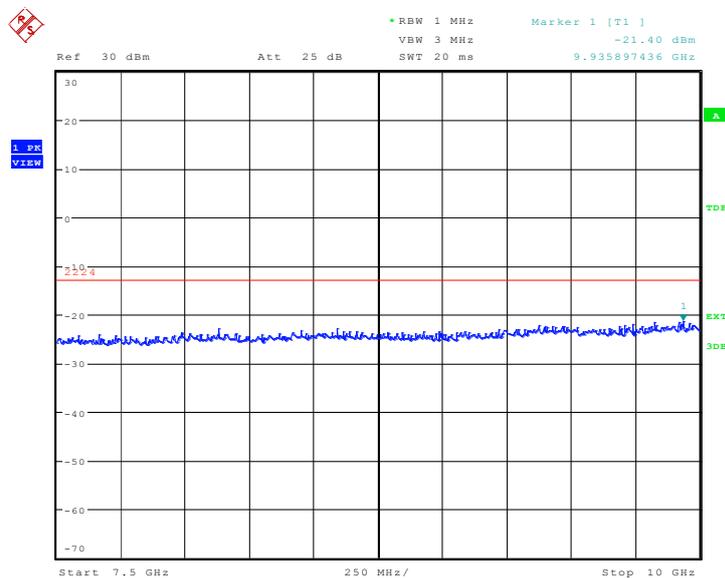


Date: 14.OCT.2011 07:10:01

A.8.3.35 Channel 1450: 10GHz –15GHz
Spurious emission limit –13dBm.

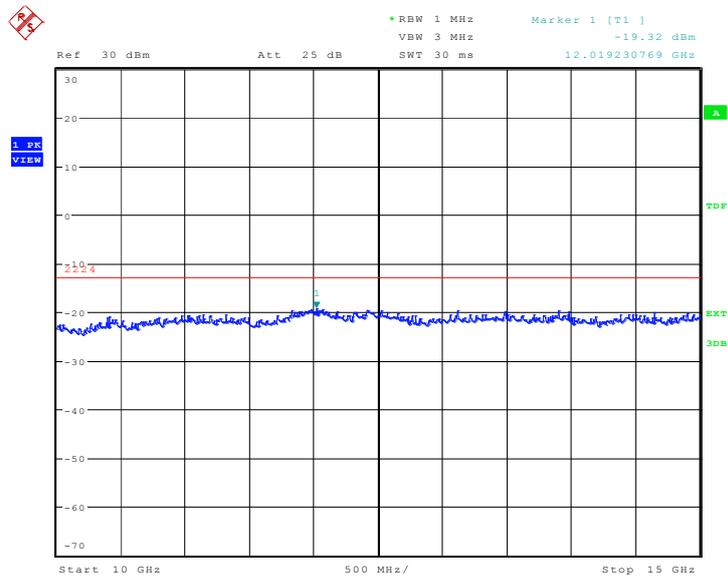


Date: 14.OCT.2011 07:10:29

A.8.3.36 Channel 1450: 15GHz –20GHz
Spurious emission limit –13dBm.

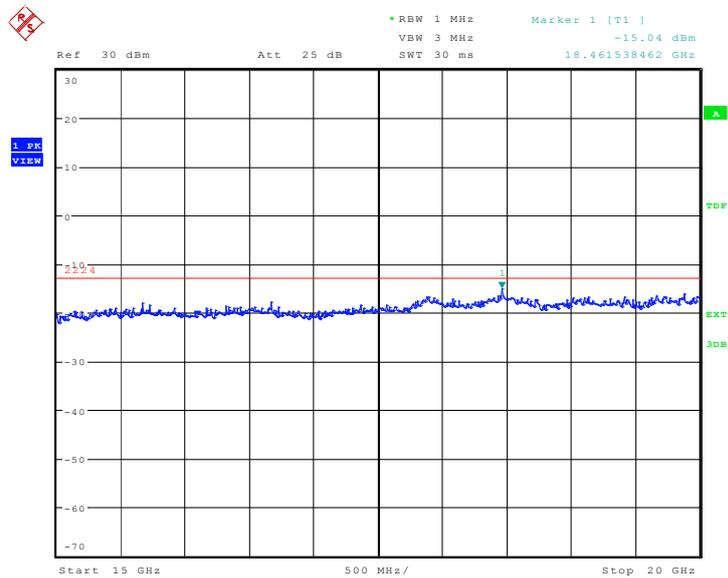

Date: 14.OCT.2011 07:10:58


A.8.3.37 Channel 1513: 30MHz –1GHz
Spurious emission limit –13dBm.

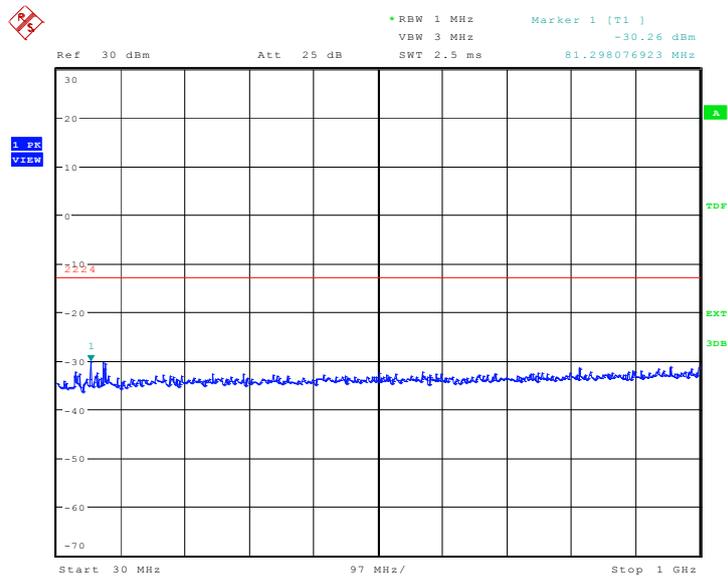

Date: 14.OCT.2011 07:11:29


A.8.3.38 Channel 1513: 1GHz –2.5GHz
Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

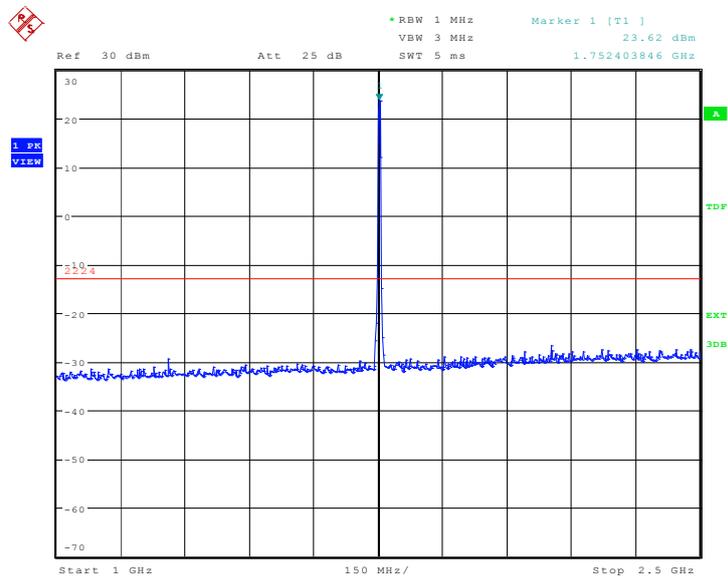


Date: 14.OCT.2011 07:11:57

A.8.3.39 Channel 1513: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

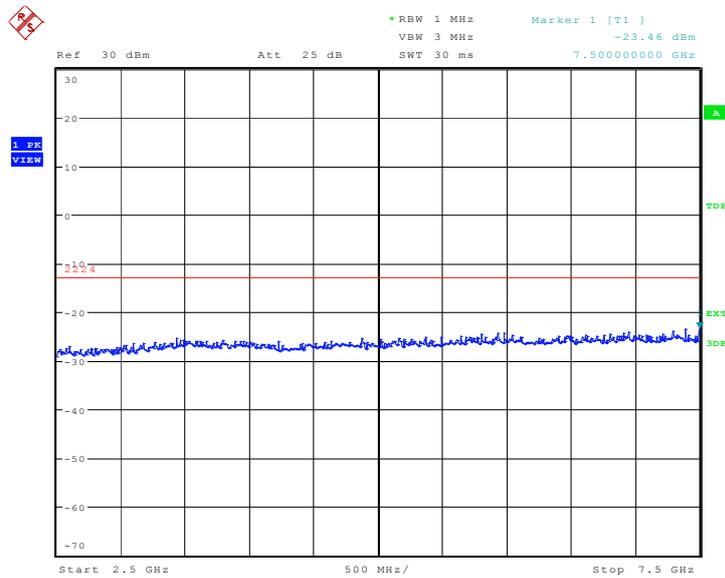


Date: 14.OCT.2011 07:12:26

A.8.3.40 Channel 1513: 7.5GHz –10GHz
Spurious emission limit –13dBm.

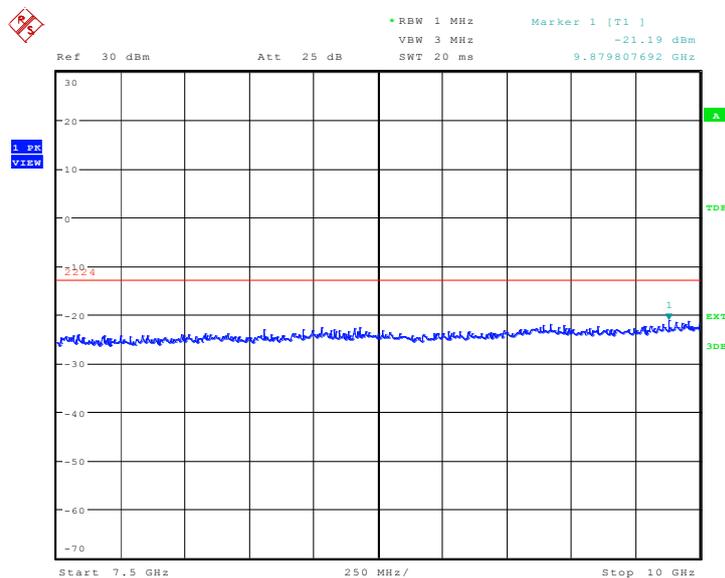


Date: 14.OCT.2011 07:12:54

A.8.3.41 Channel 1513: 10GHz –15GHz
Spurious emission limit –13dBm.

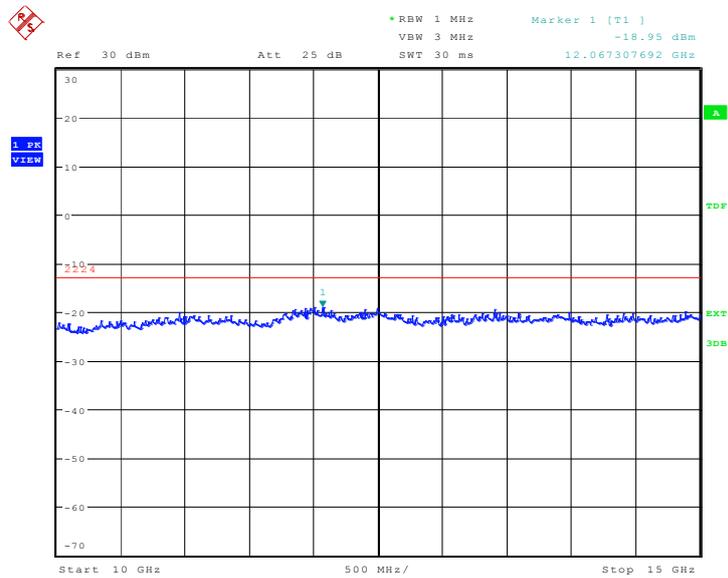


Date: 14.OCT.2011 07:13:22

A.8.3.42 Channel 1513: 15GHz –20GHz
Spurious emission limit –13dBm.

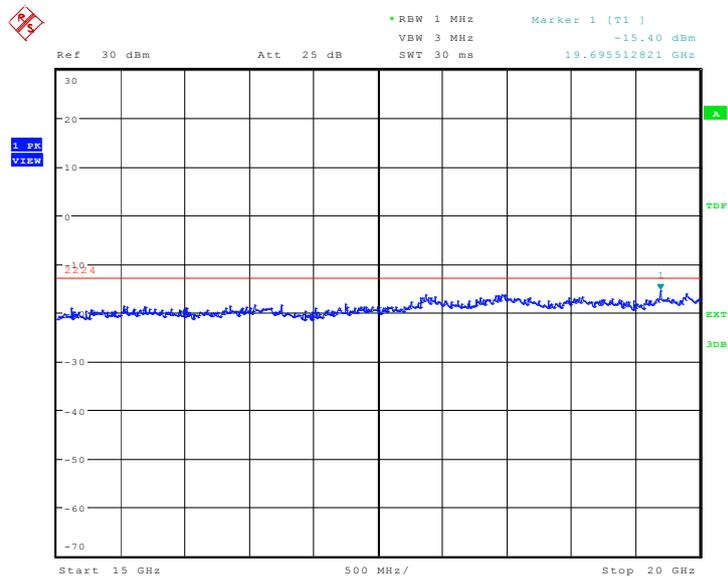


Date: 14.OCT.2011 07:13:51

A.8.3.43 Idle mode: 30MHz –1GHz
Spurious emission limit –13dBm.

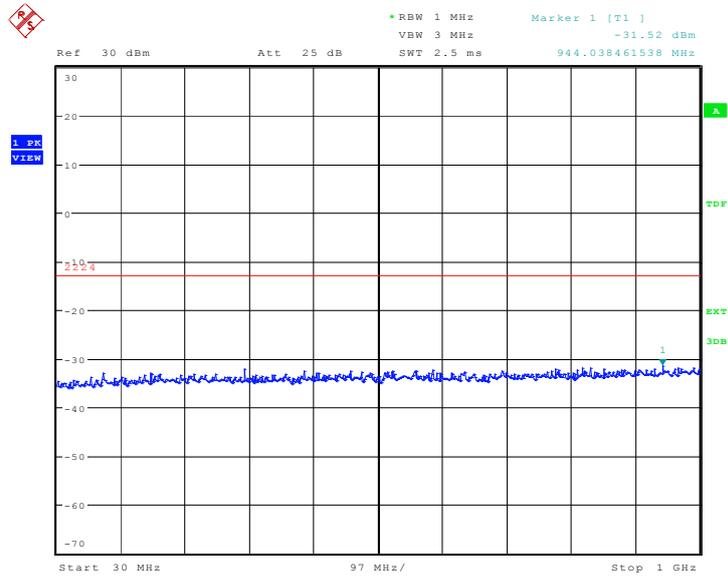


Date: 14.OCT.2011 07:14:20

A.8.3.44 Idle mode: 1GHz –2.5GHz
Spurious emission limit –13dBm.

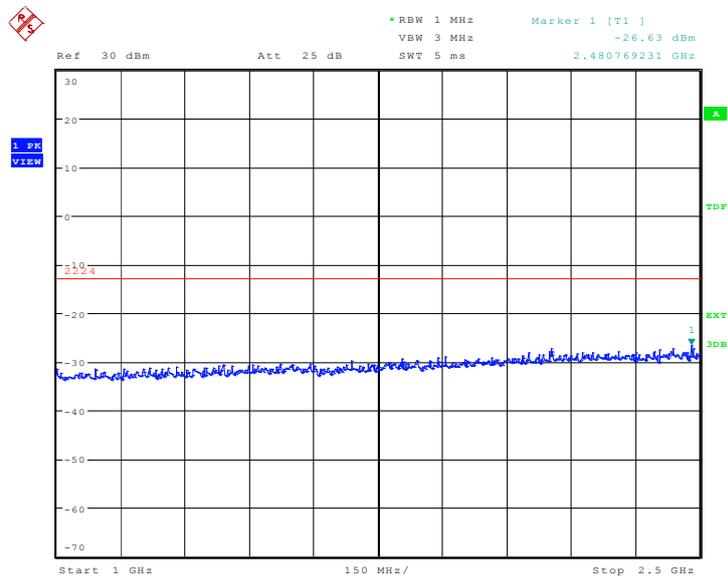


Date: 14.OCT.2011 07:14:48

A.8.3.45 Idle mode: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

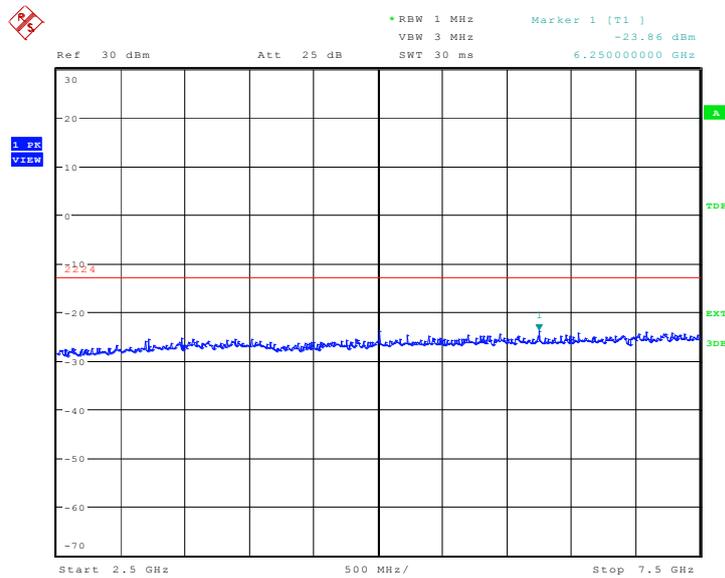


Date: 14.OCT.2011 07:15:16

A.8.3.46 Idle mode: 7.5GHz –10GHz
Spurious emission limit –13dBm.

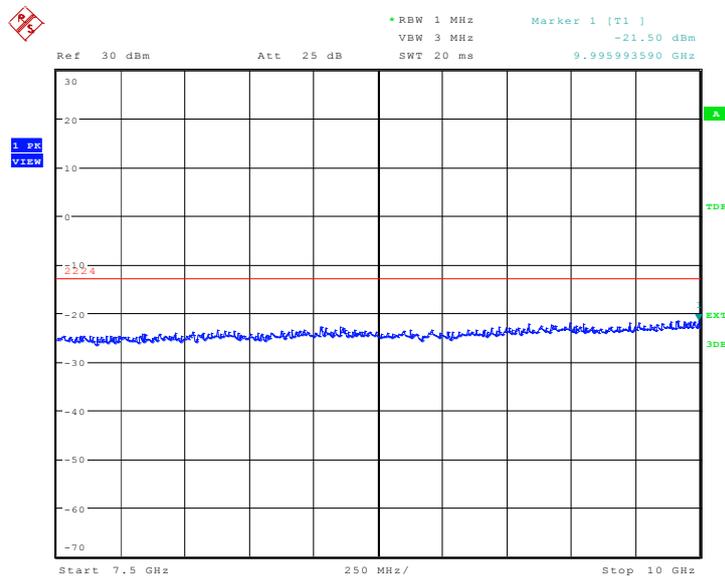


Date: 14.OCT.2011 07:15:45

A.8.3.47 Idle mode: 10GHz –15GHz
Spurious emission limit –13dBm.

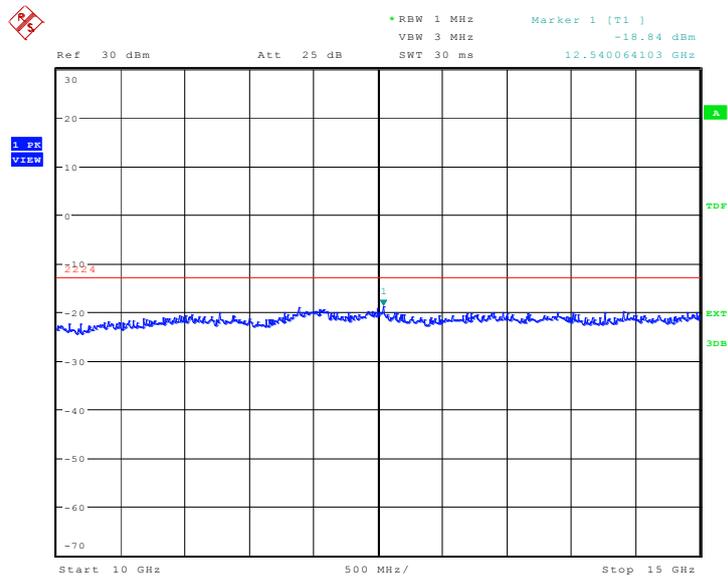

Date: 14.OCT.2011 07:16:13

A.8.3.48 Idle mode: 15GHz –20GHz
Spurious emission limit –13dBm.

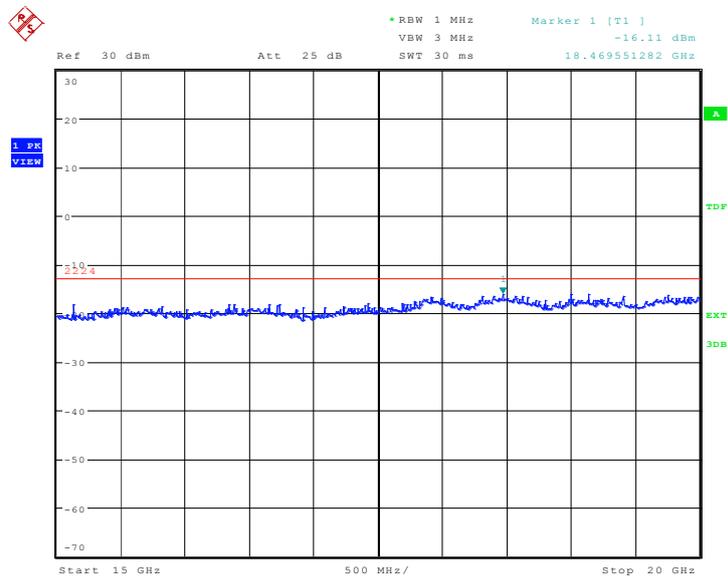


Date: 14.OCT.2011 07:16:41

WCDMA Band V

A.8.3.49 Channel 4132: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

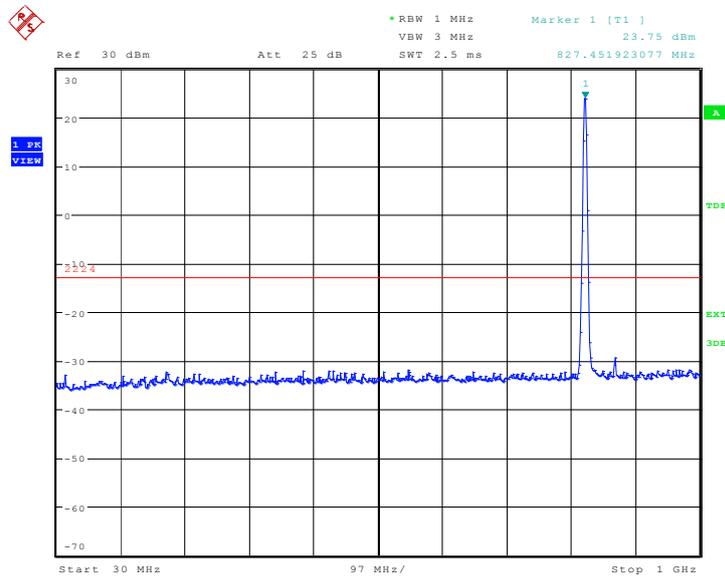

Date: 11.OCT.2011 06:26:36


A.8.3.50 Channel 4132: 1GHz – 2.5GHz

Spurious emission limit –13dBm.

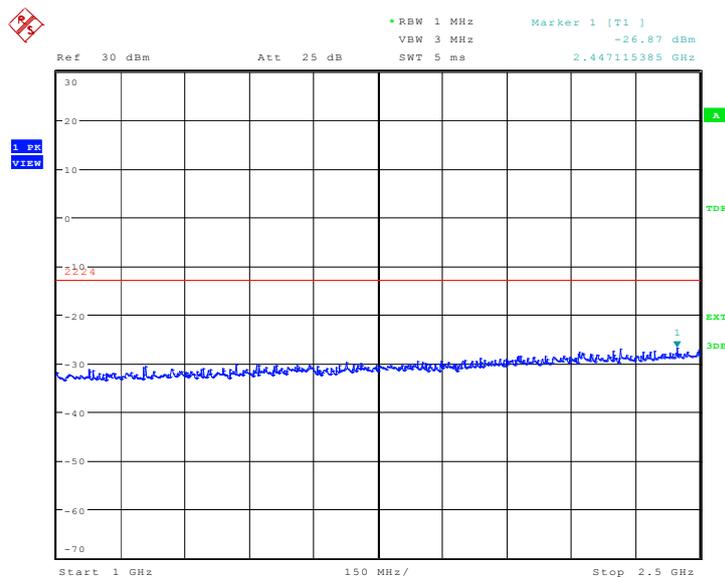


Date: 11.OCT.2011 06:27:04

A.8.3.51 Channel 4132: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

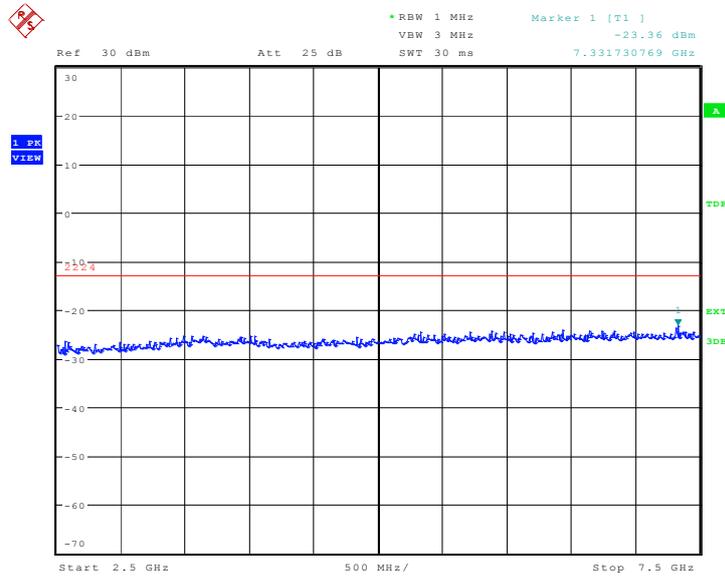

Date: 11.OCT.2011 06:27:32

A.8.3.52 Channel 4132: 7.5GHz – 10GHz
Spurious emission limit –13dBm.

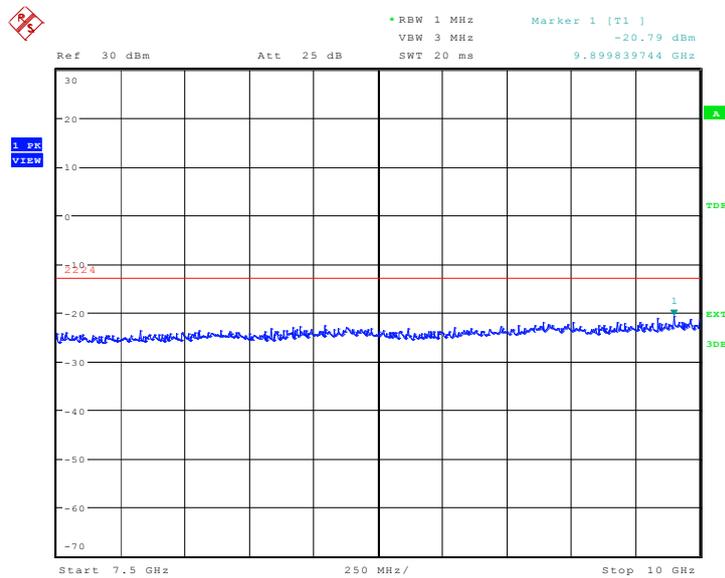


Date: 11.OCT.2011 06:28:01

A.8.3.53 Channel 4183: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

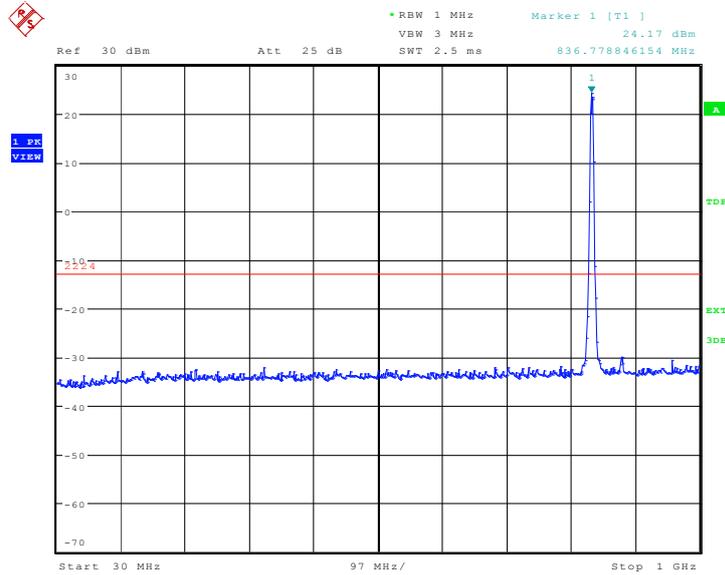

Date: 11.OCT.2011 06:28:32


A.8.3.54 Channel 4183: 1GHz – 2.5GHz

Spurious emission limit –13dBm.

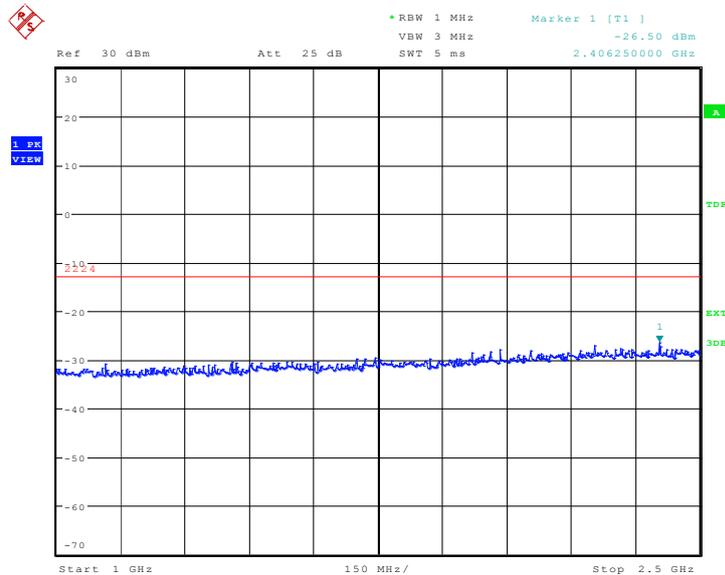


Date: 11.OCT.2011 06:29:00

A.8.3.55 Channel 4183: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

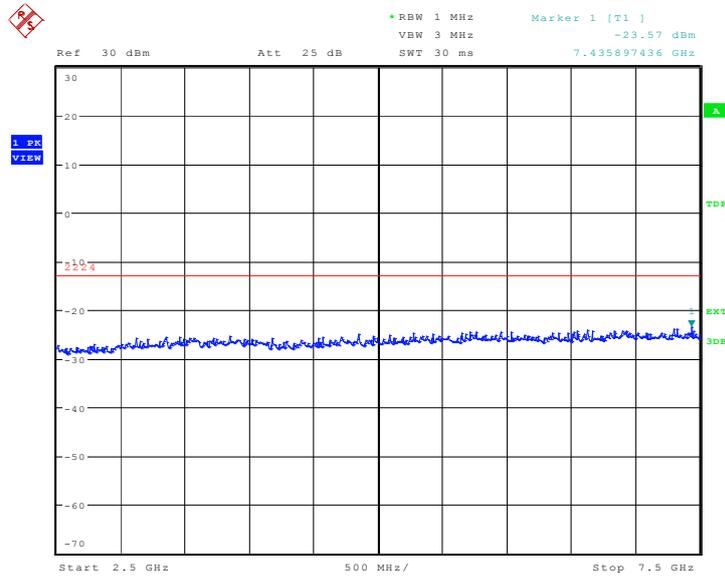

Date: 11.OCT.2011 06:29:28

A.8.3.56 Channel 4183: 7.5GHz – 10GHz
Spurious emission limit –13dBm.

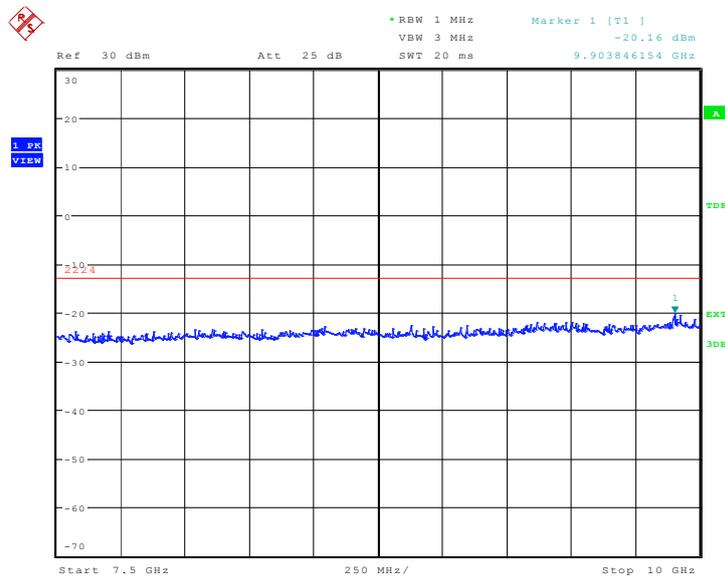


Date: 11.OCT.2011 06:29:56

A.8.3.57 Channel 4233: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

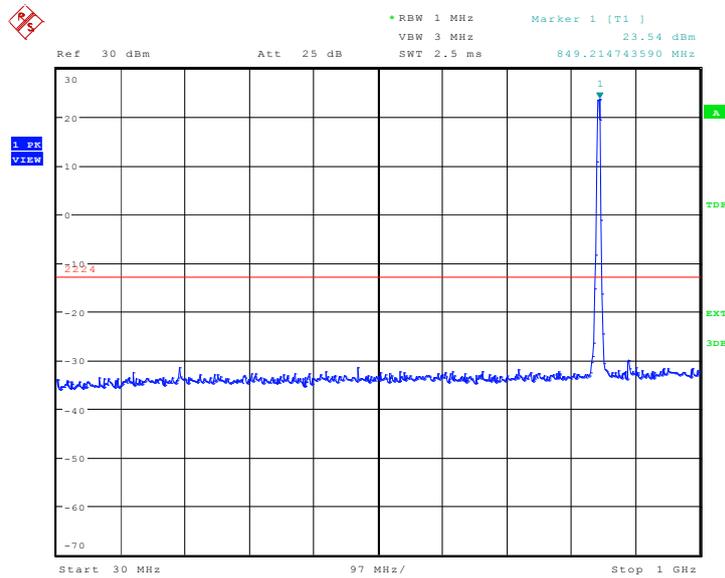

Date: 11.OCT.2011 06:30:27


A.8.3.58 Channel 4233: 1GHz – 2.5GHz

Spurious emission limit –13dBm.

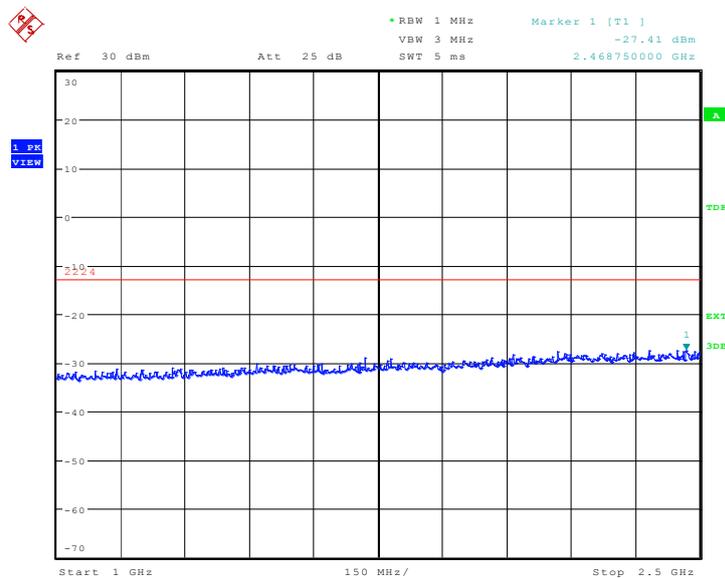


Date: 11.OCT.2011 06:30:56

A.8.3.59 Channel 4233: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

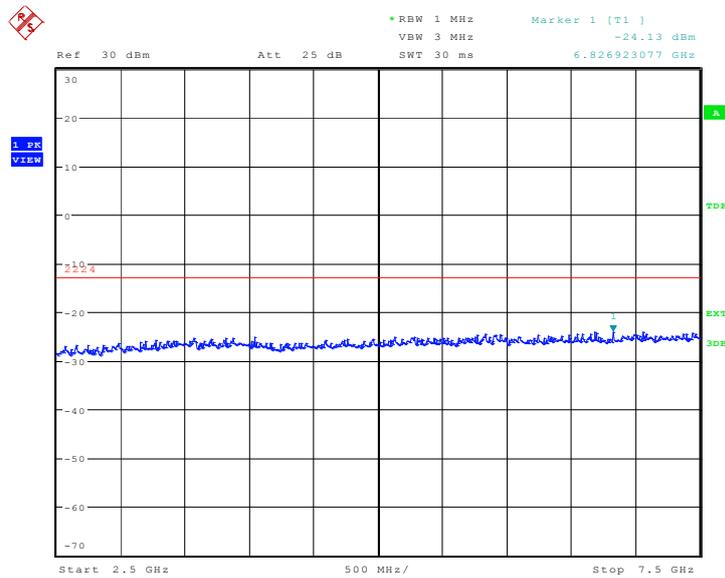


Date: 11.OCT.2011 06:31:24

A.8.3.60 Channel 4233: 7.5GHz – 10GHz
Spurious emission limit –13dBm.

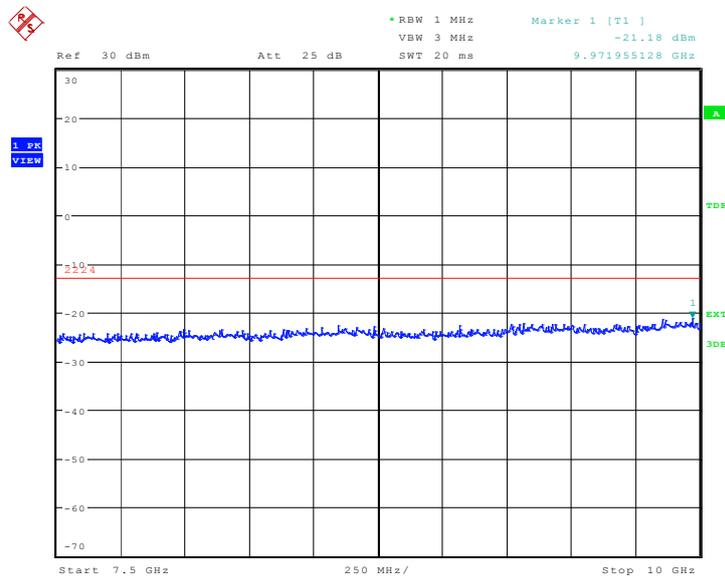


Date: 11.OCT.2011 06:31:52

A.8.3.61 Idle mode: 30MHz – 1GHz
Spurious emission limit -13dBm.

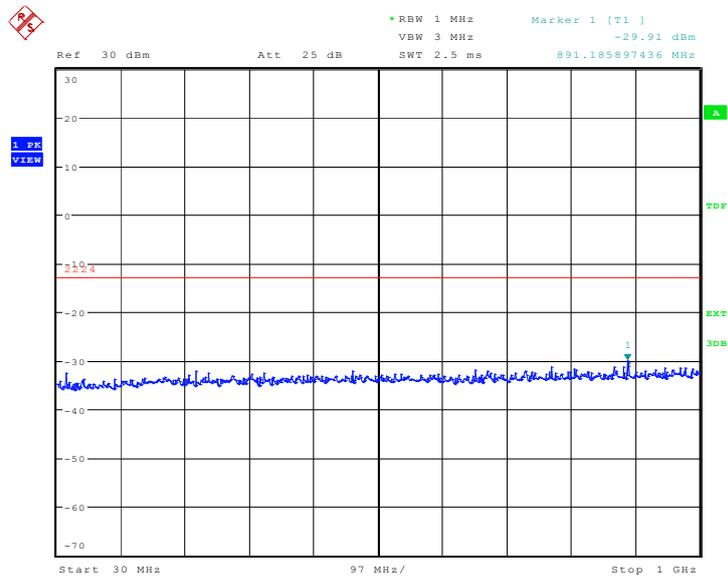


Date: 11.OCT.2011 06:32:21

A.8.3.62 Idle mode: 1GHz – 2.5GHz
Spurious emission limit -13dBm.

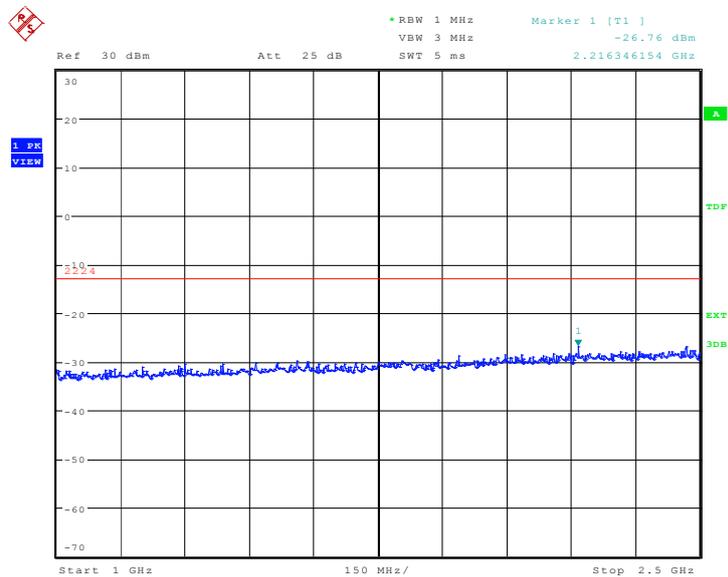


Date: 11.OCT.2011 06:32:49

A.8.3.63 Idle mode: 2.5GHz – 7.5GHz
Spurious emission limit -13dBm.

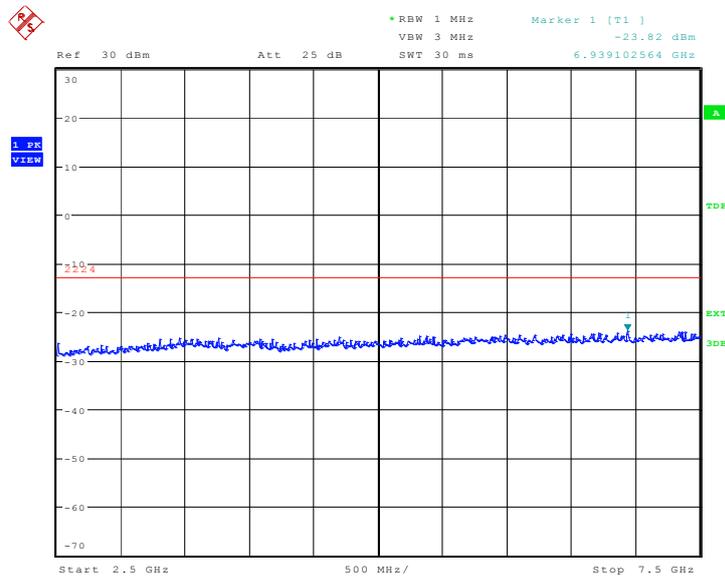

Date: 11.OCT.2011 06:33:17

A.8.3.64 Idle mode: 7.5GHz – 10GHz
Spurious emission limit -13dBm.

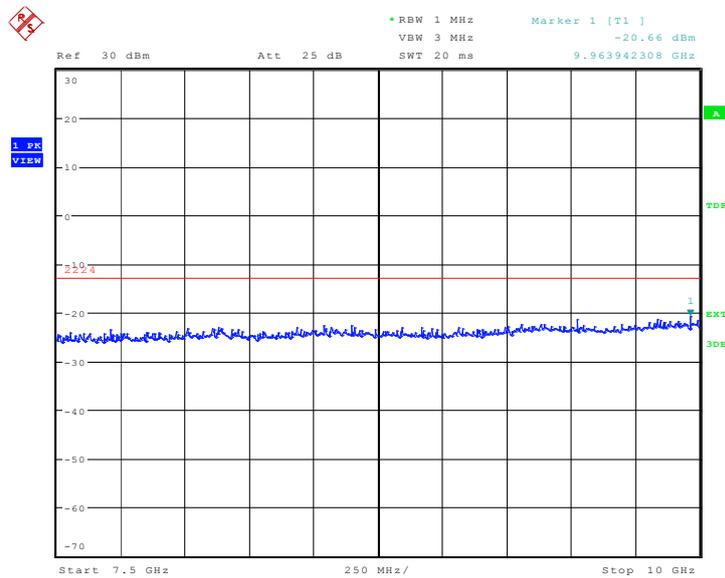

Date: 11.OCT.2011 06:33:46

END OF REPORT