

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT**INTENTIONAL RADIATOR CERTIFICATION TO****FCC PART 22 SUBPART H and PART 24 SUBPART E**

OF

Product Name: HSDPA/WCDMA/GSM/GPRS USB Modem**Brand Name: ZTE****Model Name: MF622****Report No.: ER/2007/90004****Issue Date: Oct. 09, 2007****FCC Rule Part: 2, 22H & 24E****Prepared for ZTE CORPORATION****ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China****Prepared by SGS Taiwan Ltd.****No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan.**

Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

VERIFICATION OF COMPLIANCE

Applicant: ZTE CORPORATION
 ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

Equipment Under Test: HSDPA/WCDMA/GSM/GPRS USB Modem

Brand Name: ZTE

Model No.: MF622

Model Difference: N/A

File Number: ER/2007/900004

Date of test: Sep. 08, 2007 ~ Oct. 05, 2007

Date of EUT Received: Sep. 07, 2007

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA-603-1-1998 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rule FCC PART 22 subpart H and FCC PART 24 subpart E.

The test results of this report relate only to the tested sample identified in this report.

Test By:



Date

Oct. 09, 2007

Sky Wang / Sr. Engineer

Prepared By:



Date

Oct. 09, 2007

Gigi Yeh / Clerk

Approved By



Date

Oct. 09, 2007

Vincent Su/Manager

Version

Version No.	Date
00	Oct. 09, 2007

This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

Table of Contents

1. GENERAL INFORMATION	6
1.1 Product Description	6
1.2 Related Submittal(s) / Grant (s)	6
1.3 Test Methodology	7
1.4 Test Facility	7
1.5 Special Accessories	7
1.6 Equipment Modifications	7
2. SYSTEM TEST CONFIGURATION	8
2.1 EUT Configuration	8
2.2 EUT Exercise	8
2.3 Test Procedure	8
2.4 Configuration of Tested System	9
3. SUMMARY OF TEST RESULTS	10
4. DESCRIPTION OF TEST MODES	10
5. RF POWER OUTPUT MEASUREMENT	11
5.1 Standard Applicable	11
5.2 Test Set-up:	11
5.3 Measurement Procedure	11
5.4 Measurement Equipment Used:	12
5.5 Measurement Result	13
6. ERP, EIRP MEASUREMENT	14
6.1 Standard Applicable	14
6.2 Test SET-UP (Block Diagram of Configuration)	14
6.3 Measurement Procedure	16
6.4 Measurement Equipment Used:	17
6.5 Measurement Result	18
6.6 Measurement Result	19
6.7 Measurement Result	20
6.8 Measurement Result	21
7. 99% OCCUPIED BANDWIDTH MEASUREMENT	22
7.1 Standard Applicable	22
7.2 Test Set-up:	22
7.3 Measurement Procedure	22
7.4 Measurement Equipment Used:	23
7.5 Measurement Result:	24
8. OUT OF BAND EMISSION AT ANTENNA TERMINALS	33

This document is issued by SGS Taiwan Ltd. for the Client's use only. It is the property of SGS Taiwan Ltd. and its content is confidential. It is not to be distributed, copied, or used for any other purpose without the prior written consent of SGS Taiwan Ltd. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

8.1	Standard Applicable	33
8.2	Test SET-UP.....	33
8.3	Measurement Procedure.....	33
8.4	Measurement Equipment Used:	34
8.5	Measurement Result.....	35
9.	FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	51
9.1	Standard Applicable	51
9.2	EUT Setup (Block Diagram of Configuration).....	51
9.3	Measurement Procedure.....	53
9.4	Measurement Equipment Used:	54
9.5	Measurement Result.....	54
10.	FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	79
10.1	Standard Applicable	79
10.2	Test Set-up:	79
10.3	Measurement Procedure.....	79
10.4	Measurement Equipment Used:	80
10.5	Measurement Result.....	81
11.	FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT	83
11.1	Standard Applicable	83
11.2	Test Set-up:	83
11.3	Measurement Procedure.....	83
11.4	Measurement Equipment Used:	84
11.5	Measurement Result.....	85
12.	AC POWER LINE CONDUCTED EMISSION TEST	87
12.1	Standard Applicable	87
12.2	EUT Setup.....	87
12.3	Measurement Procedure.....	87
12.4	Measurement Equipment Used:	88
12.5	Measurement Result.....	88
	PHOTOGRPHS OF SET UP.....	97
	PHOTOGRPHS OF EUT.....	100

1. GENERAL INFORMATION

1.1 Product Description

Product	HSDPA/WCDMA/GSM/GPRS USB Modem
Model Name	MF622
Model Difference:	N/A
Brand Name	ZTE
Data Cable (USB):	1 cable, model: N/A
Power Supply	5 Vdc from PC USB Port

GSM/ WCDMA:

Cellular Phone Standards Frequency Range and Power	GSM/GPRS 850	824 MHz– 849MHz	33 dBm
	E-GSM/GPRS 900	880MHz – 915MHz	33 dBm
	GSM/GPRS 1800	1710MHz-1785MHz	30 dBm
	GSM/GPRS 1900	1850MHz – 1910MHz	30 dBm
	WCDMA/HSDPA Band I (7.2Mbps max.)	1920MHz - 1980MHz	24 dBm
	WCDMA/HSDPA Band II (7.2Mbps max.)	1850MHz – 1910MHz	24 dBm
	WCDMA/HSDPA Band V (7.2Mbps max.)	824 MHz– 849MHz	24 dBm
Type of Emission	GSM: 300KGXW WCDMA: 4M20F9W		
Software Version	P671M3V1.0.0B01		
Hardware Version	W66A		

This test report applies for GSM/GPRS 850, GSM/GPRS 1900, WCDMA/HSDPA Band II, WCDMA/HSDPA Band V.

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for filing to comply with Section Part 22 subpart H and Part 24 subpart E of the FCC CFR 47 Rules.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures documented on chapter 13 of ANSI C63.4 (2003) and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 and CISPR 22/EN 55022 requirements. Site No. 1(3 & 10 meters) Registration Number: 94644, Both OATS and Anechoic chamber (3 meters) was accredited by TAF (0513). Canada Registration Number: 4620A-1

1.5 Special Accessories

Not available for this EUT intended for grant.

1.6 Equipment Modifications

Not available for this EUT intended for grant.

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 1.0 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 and 13 of ANSI C63.4-2003.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System (Fixed Channel)

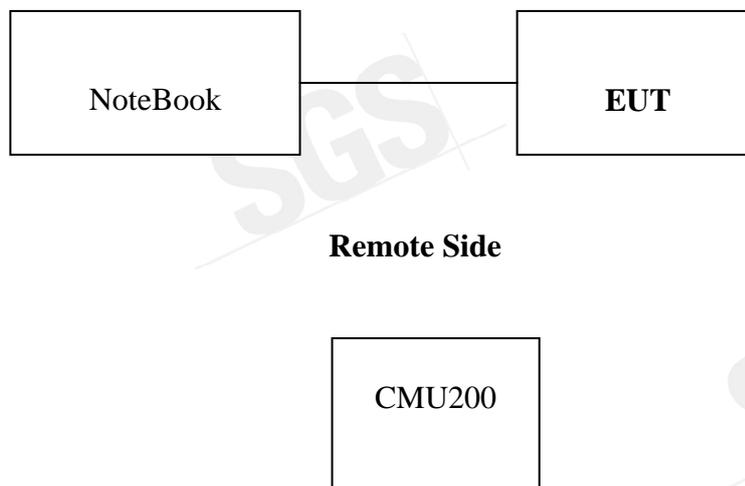


Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	NoteBook	IBM	T40	99HCYF4	Un-shielded	Un-shielded
2.	Universal Radio Communication Tester	R&S	CMU200	102189	shielded	Un-shielded

3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§2.1046(a) §22.913(a) §24.232(a)	RF Power Output	Compliant
§2.1046(a) §22.913(a) §24.232(a)	ERP/ EIRP measurement	Compliant
§2.1049(h)	99% Occupied Bandwidth	Compliant
§2.1051 §22.917(a) §24.238(a)	Out of Band Emissions at Antenna Terminals and Band Edge	Compliant
§2.1053 §22.917(a) §24.238(a)	Field Strength of Spurious Radiation	Compliant
§2.1055(a)(1)(b)	Frequency Stability vs. Temperature	Compliant
§2.1055(d)(1)(2)	Frequency Stability vs. Voltage	Compliant
§15.107;§15.207	AC Power Line Conducted Emission	Compliant

4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

EUT staying in continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing.

5. RF POWER OUTPUT MEASUREMENT


5.1 Standard Applicable

According to FCC §2.1046.

FCC 22.913(a) Mobile station are limited to 7W.

FCC 24.232(b) Mobile station are limited to 2W.

5.2 Test Set-up:

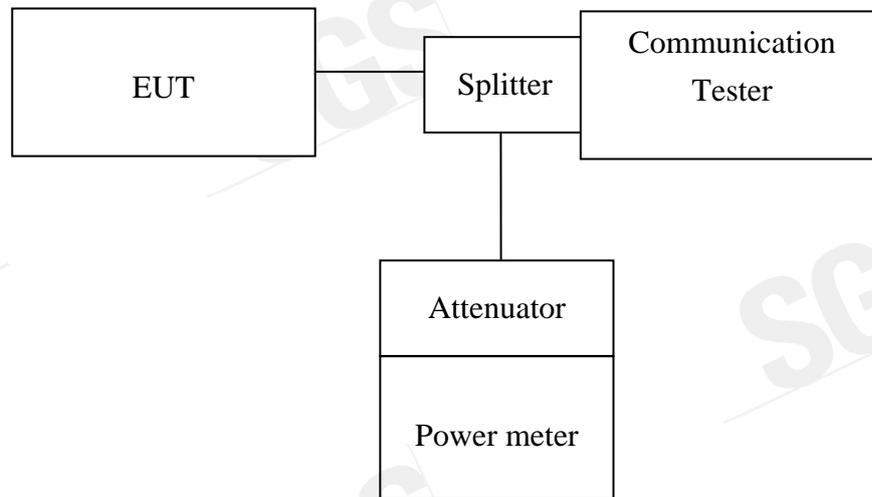

Note: Measurement setup for testing on Antenna connector

5.3 Measurement Procedure

The transmitter output was connected to a calibrated attenuator, the other end of which was connected to a power meter. Transmitter output was read off the power meter in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to the power meter reading.

5.4 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008
Spectrum Analyzer	Agilent	E7405A	US41160416	06/28/2007	06/29/2008
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2006	11/10/2007
Communication Test	R&S	SMU200	N/A	N/A	N/A
Power Sensor	Anritsu	MA2490A	31431	06/28/2007	06/29/2008
Power Meter	Anritsu	ML2487A	6K00002070	06/28/2007	06/29/2008
Temperature Chamber	TERCHY	MHG-120LF	911009	10/14/2006	10/13/2007
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circuit	BW-S10W5	N/A	09/23/2007	09/22/2008
Attenuator	Mini-Circuit	BW-S6W5	N/A	09/23/2007	09/22/2008
Splitter	Agilent	11636B	51728	09/23/2007	09/22/2008
DC Power Supply	TOPWARD	3303A	N/A	N/A	N/A

5.5 Measurement Result

EUT Mode	Frequency (MHz)	CH	Power meter Reading (dBm)	Path Loss (dB)	Peak Power (dBm)
GSM 850	824.20	128	14.98	17.50	32.48
	836.60	190	15.12	17.50	32.62
	848.80	251	15.03	17.50	32.53

EUT Mode	Frequency (MHz)	CH	Power Meter Reading (dBm)	Path Loss (dB)	Peak Power (dBm)
PCS 1900	1850.20	512	11.58	17.50	29.08
	1880.00	661	11.61	17.50	29.11
	1909.80	810	11.67	17.50	29.17

EUT Mode	Frequency (MHz)	CH	Power meter Reading (dBm)	Path Loss (dB)	Peak Power (dBm)
WCDMA II	1852.40	9262	5.03	17.50	22.53
	1880.00	9400	4.66	17.50	22.16
	1907.60	9538	4.52	17.50	22.02

EUT Mode	Frequency (MHz)	CH	Power Meter Reading (dBm)	Path Loss (dB)	Peak Power (dBm)
WCDMA V	826.40	4132	5.31	17.50	22.81
	836.00	4180	4.74	17.50	22.24
	846.60	4233	4.8	17.50	22.30

6. ERP, EIRP MEASUREMENT

6.1 Standard Applicable


According to FCC §2.1046

FCC 22.913(a) Mobile station are limited to 7W ERP.


FCC 24.232(b) Mobile station are limited to 2W EIRP.

6.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

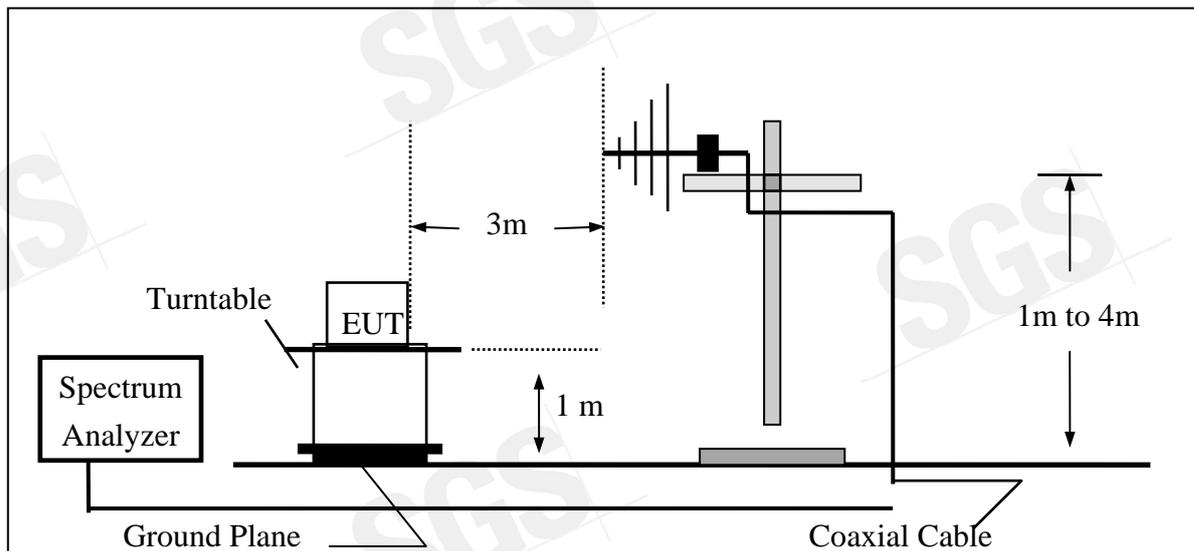

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

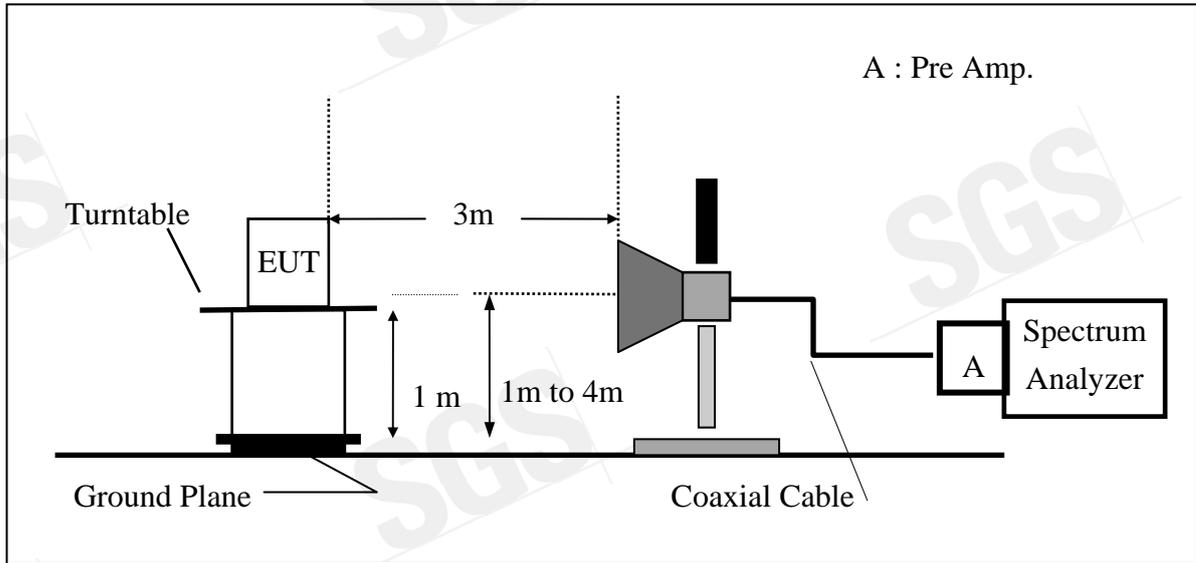

(C) Substituted Method Test Set-UP

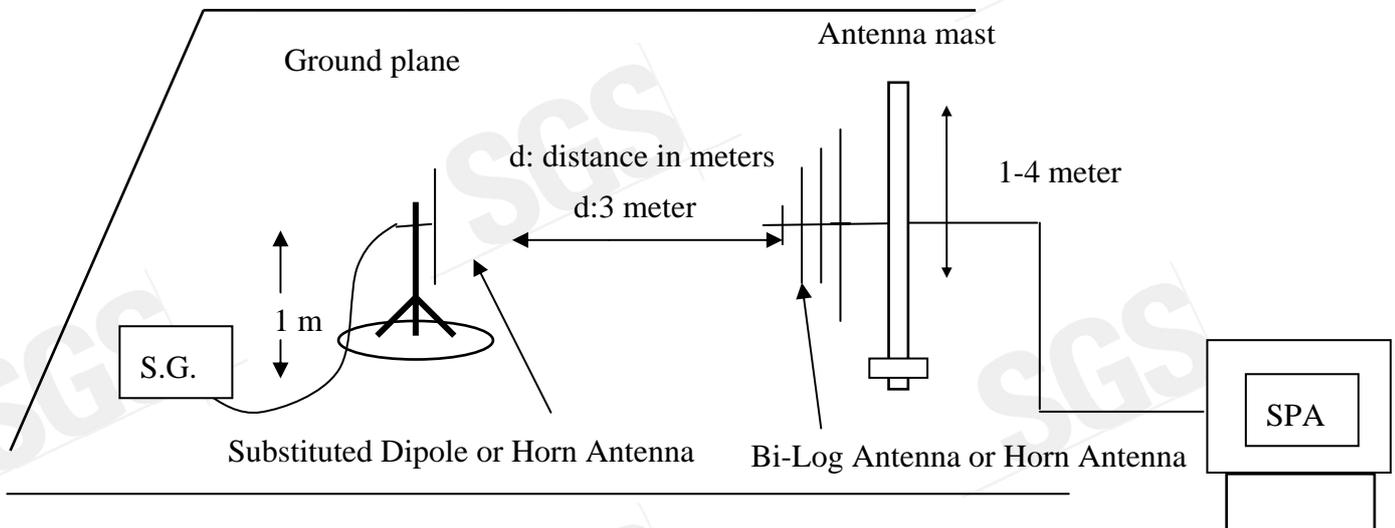

6.3 Measurement Procedure

The EUT was placed on a non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.

During the measurement, the EUT was in communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by a dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows:

EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by a horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:

$$\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable Loss (dB)}$$

$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable Loss (dB)}$$

6.4 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2007	06/29/2008
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2006	11/10/2007
Communication Test	R&S	SMU200	N/A	N/A	N/A
Bilog Antenna	SCHWAZBECK	VULB9163	152	06/03/2007	06/02/2008
Horn antenna	Schwarzbeck	BBHA 9120D	309/320	08/16/2007	08/15/2008
Pre-Amplifier	HP	8447D	2944A09469	07/19/2007	07/18/2008
Pre-Amplifier	HP	8494B	3008A00578	02/26/2007	02/25/2008
Signal Generator	R&S	SMR40	100210	02/09/2007	02/10/2008
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	10/09/2007	10/08/2008
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	10/09/2007	10/08/2008
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-0.5M	0.5m	10/09/2007	10/08/2008
Site NSA	SGS	966 chamber	N/A	11/17/2006	11/16/2007
Attenuator	Mini-Circuit	BW-S10W5	N/A	09/23/2007	09/22/2008
Dipole Antenna	Schwarzbeck	VHAP	908/909	06/10/2007	06/11/2008
Dipole Antenna	Schwarzbeck	UHAP	891/892	06/10/2007	06/11/2008
Horn antenna	Schwarzbeck	BBHA 9120D	N/A	08/16/2007	08/15/2008

6.5 Measurement Result

EUT Mode	Frequency (MHz)	CH	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
GSM 850	824.20	128	H	V	124.60	37.28	-7.87	3.64	25.76	38.45
				H	127.22	39.56	-7.87	3.64	28.05	38.45
	836.60	190	H	V	125.08	38.05	-7.88	3.70	26.48	38.45
				H	129.15	41.81	-7.88	3.70	30.24	38.45
	848.80	251	H	V	125.08	38.34	-7.88	3.75	26.71	38.45
				H	127.55	40.53	-7.88	3.75	28.90	38.45

6.6 Measurement Result

EUT Mode	Frequency (MHz)	CH	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
PCS 1900	1850.20	512	H	V	127.05	20.09	9.90	5.41	24.58	33.00
				H	128.43	21.54	9.90	5.41	26.03	33.00
	1880.00	661	H	V	125.94	18.99	9.99	5.46	23.52	33.00
				H	127.71	20.84	9.99	5.46	25.37	33.00
	1909.80	810	H	V	125.39	18.45	10.08	5.51	23.02	33.00
				H	127.46	20.61	10.08	5.51	25.17	33.00

Remark :

- (1) The RBW,VBW of SPA for frequency
 Below 1GHz was RBW=100 KHz, VBW=300KHz,
 Above 1GHz was RBW= 1MHz , VBW= 3MHz

6.7 Measurement Result

EUT Mode	Frequency (MHz)	CH	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
WCDMA II	1852.50	9262	H	V	120.09	13.13	9.90	5.41	17.63	33.00
				H	121.96	15.07	9.90	5.41	19.57	33.00
	1880.00	9400	H	V	119.69	12.74	9.99	5.46	17.27	33.00
				H	122.25	15.38	9.99	5.46	19.91	33.00
	1907.60	9538	H	V	118.86	11.92	10.07	5.51	16.49	33.00
				H	122.24	15.38	10.07	5.51	19.95	33.00

6.8 Measurement Result

EUT Mode	Frequency (MHz)	CH	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
WCDMA V	826.40	4132	H	V	117.84	30.57	-7.88	3.65	19.04	38.45
				H	117.17	29.57	-7.88	3.65	18.04	38.45
	836.00	4180	H	V	116.52	29.48	-7.88	3.69	17.91	38.45
				H	117.35	30.00	-7.88	3.69	18.43	38.45
	846.60	4233	H	V	118.42	31.63	-7.88	3.74	20.01	38.45
				H	117.83	30.75	-7.88	3.74	19.13	38.45

Remark :


- The RBW,VBW of SPA for frequency
Below 1GHz was RBW=100 KHz, VBW=300KHz,
Above 1GHz was RBW= 1MHz , VBW= 3MHz

7. 99% OCCUPIED BANDWIDTH MEASUREMENT

7.1 Standard Applicable

According to §FCC 2.1049.

7.2 Test Set-up:

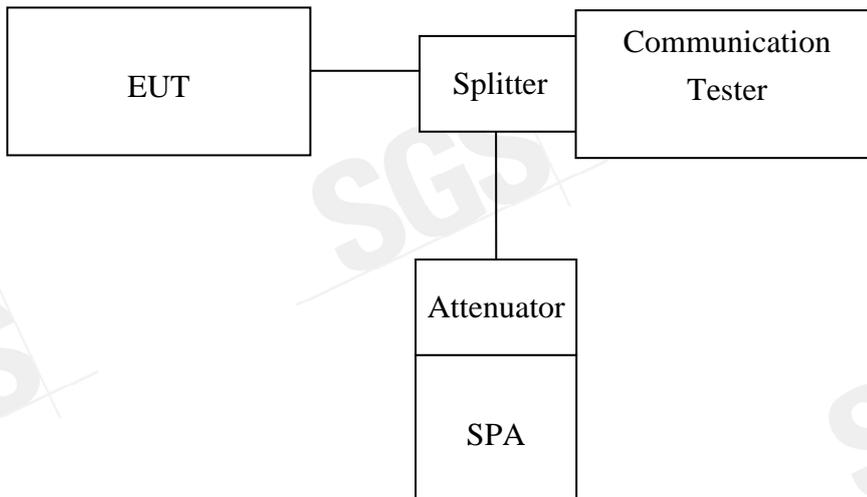

Note: Measurement setup for testing on Antenna connector

7.3 Measurement Procedure

The EUT's output RF connector was connected with a short cable to the spectrum analyzer, RBW (10/30KHz) was set to about 1% of emission BW, VBW= 3 times RBW(30/100KHz), -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

7.4 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2007	06/29/2008
Power Sensor	Anritsu	MA2490A	31431	06/28/2007	06/29/2008
Power Meter	Anritsu	ML2487A	6K00002070	06/28/2007	06/29/2008
Temperature Chamber	TERCHY	MHG-120LF	911009	11/11/2006	11/12/2007
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circuit	BW-S10W5	N/A	10/07/2007	10/06/2008
Attenuator	Mini-Circuit	BW-S6W5	N/A	10/07/2007	10/06/2008
Splitter	Mini-Circuit	ZFSC-2-10G	N/A	10/07/2007	10/06/2008
Signal Generator	R&S	SMR40	100210	11/09/2006	11/10/2007
DC Power Supply	Agilent	6038A	2929A-07548	01/06/2007	01/05/2008

7.5 Measurement Result:.

EUT Mode	Frequency (MHz)	CH	99% Bandwidth (MHz)
GSM 850	824.20	128	0.2440
	836.60	190	0.2440
	848.80	251	0.2460

EUT Mode	Frequency (MHz)	CH	99% Bandwidth (MHz)
PCS 1900	1850.20	512	0.2440
	1880.00	661	0.2420
	1909.80	810	0.2440

EUT Mode	Frequency (MHz)	CH	99% Bandwidth (MHz)
WCDMA II	1852.40	9262	4.1794
	1880.00	9400	4.1757
	1907.60	9538	4.1682

EUT Mode	Frequency (MHz)	CH	99% Bandwidth (MHz)
WCDMA V	826.40	4132	4.1537
	836.00	4180	4.1630
	846.60	4233	4.1649

Figure 7-1: GSM Channel Low

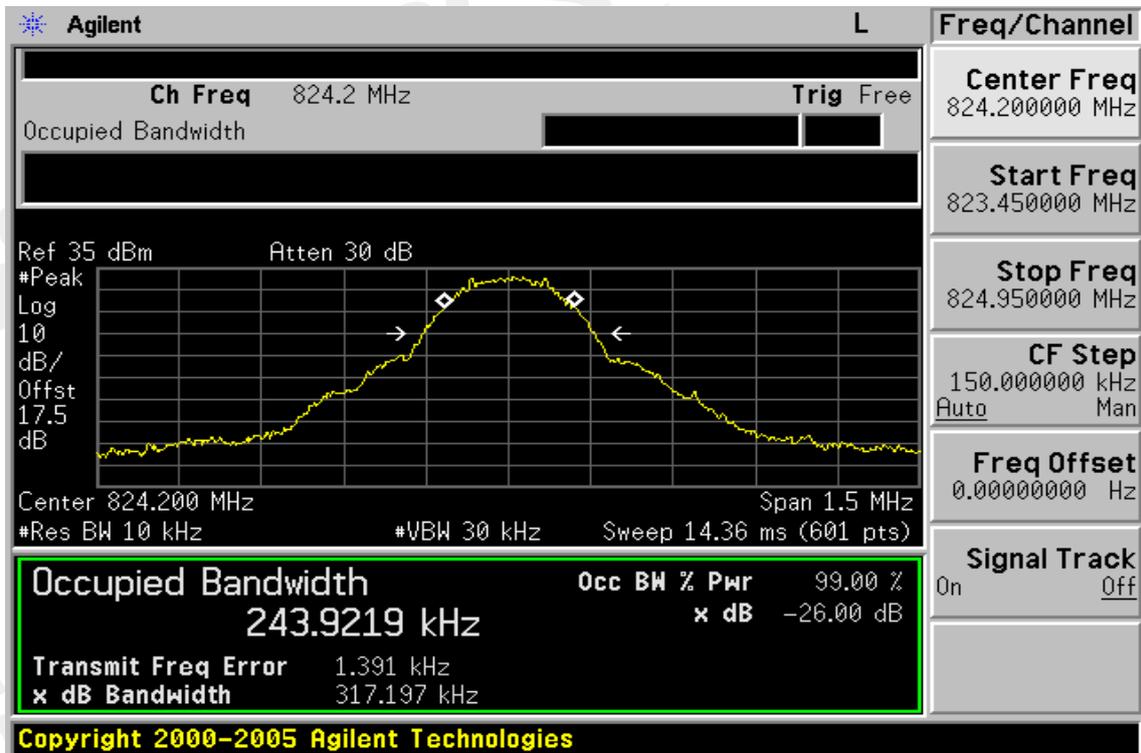


Figure 7-2 GSM Channel Mid

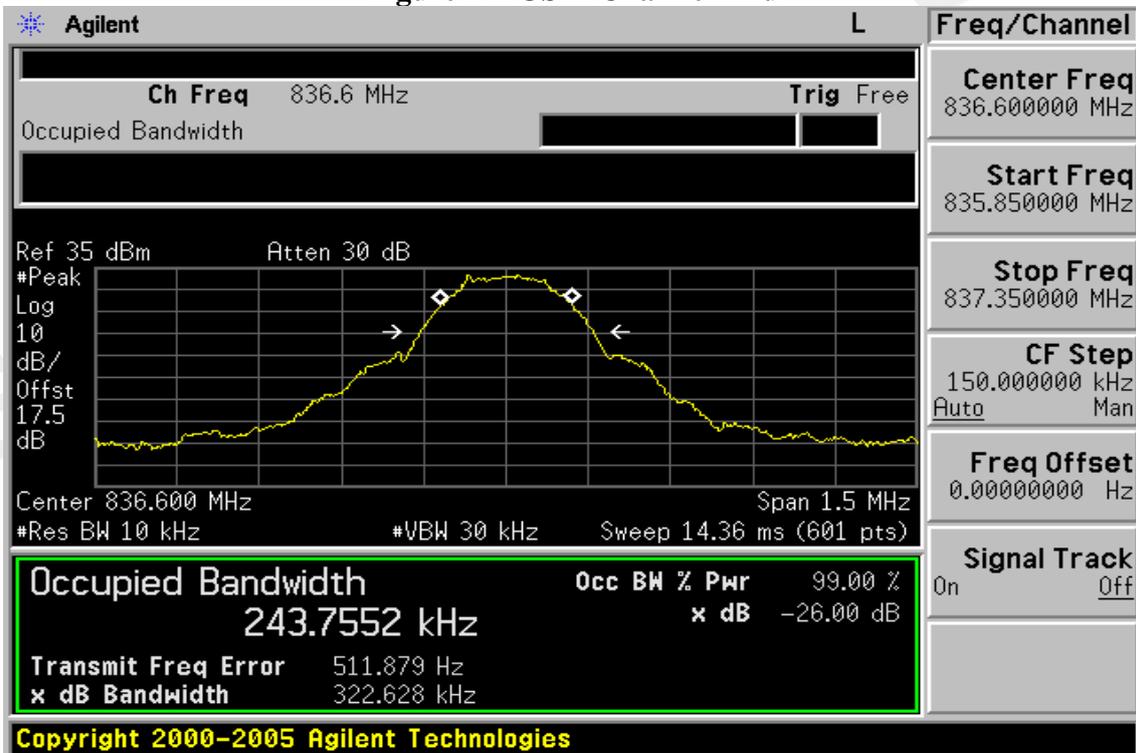


Figure 7-3: GSM Channel High

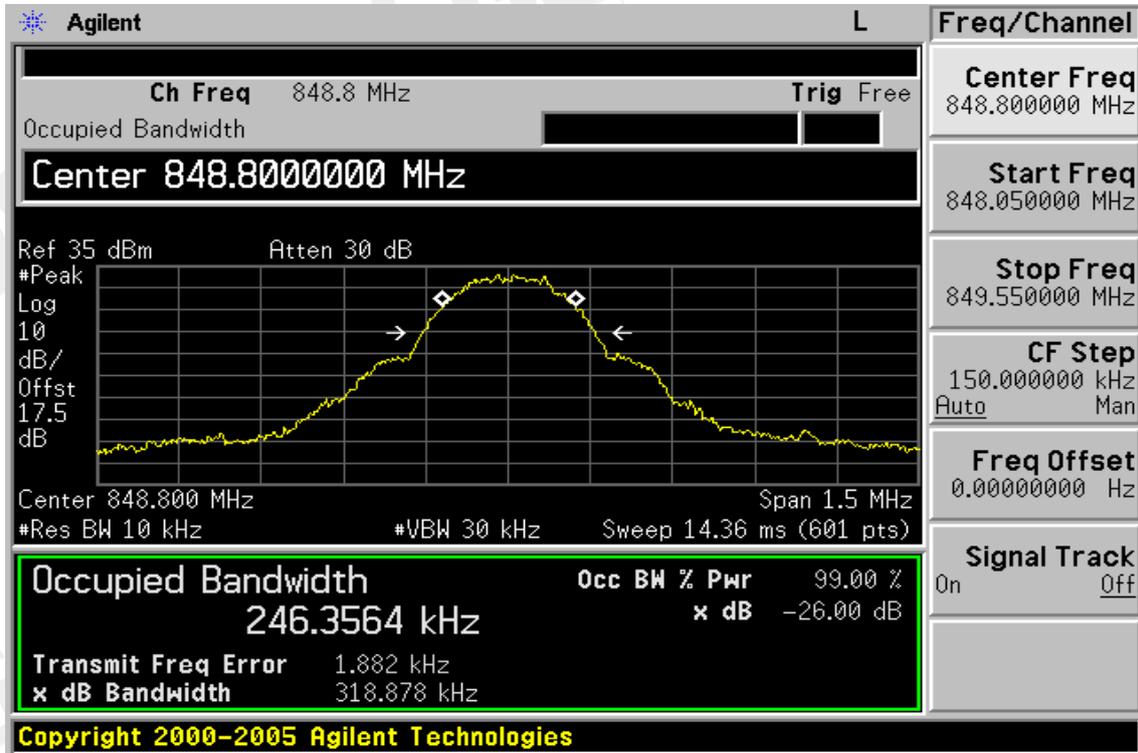


Figure 7-4: PCS Channel Low

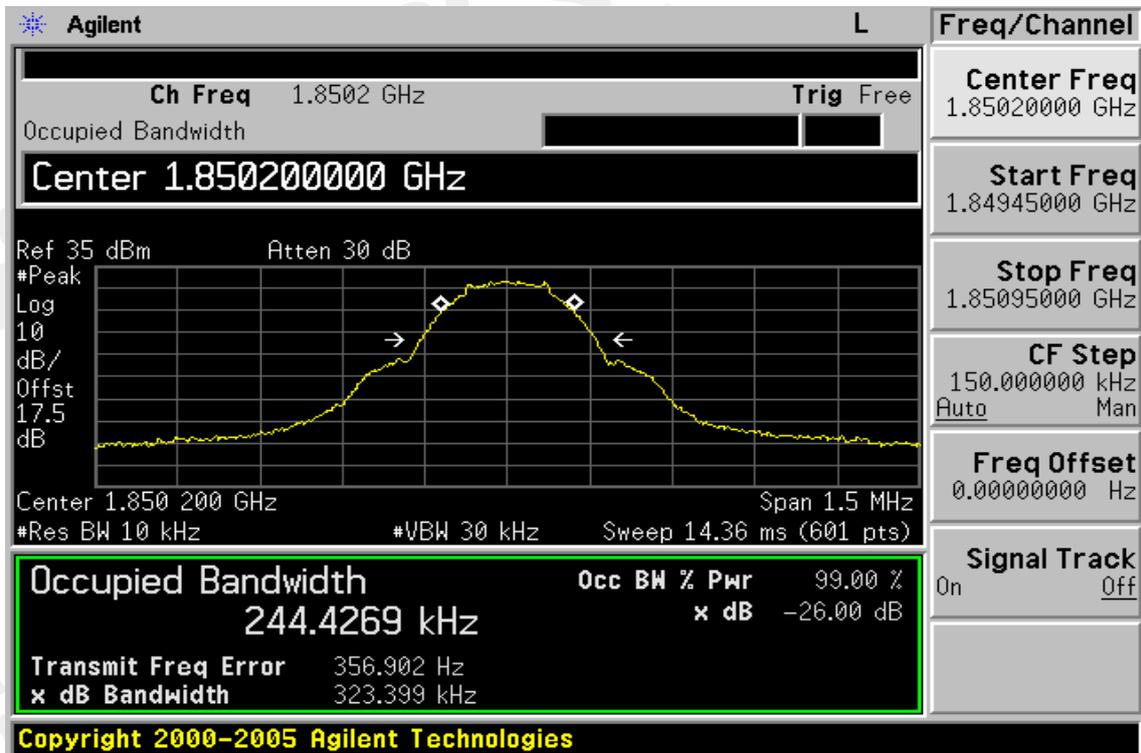


Figure 7-5 PCS Channel Mid

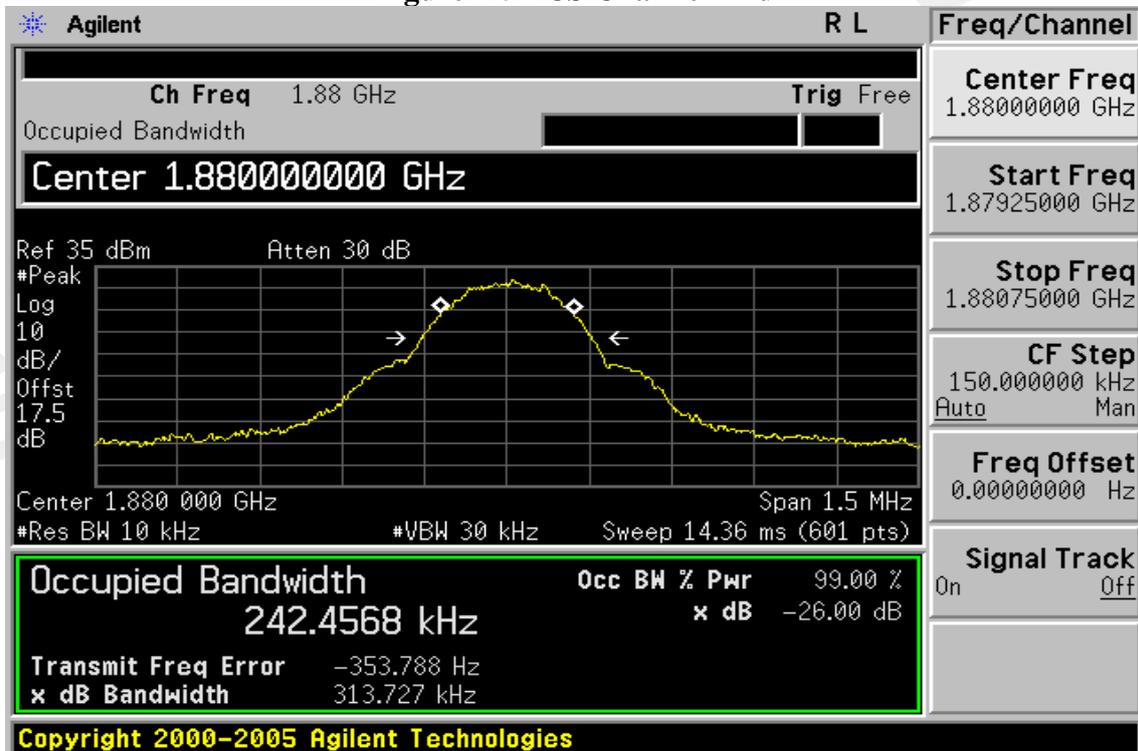


Figure 7-6: PCS Channel High

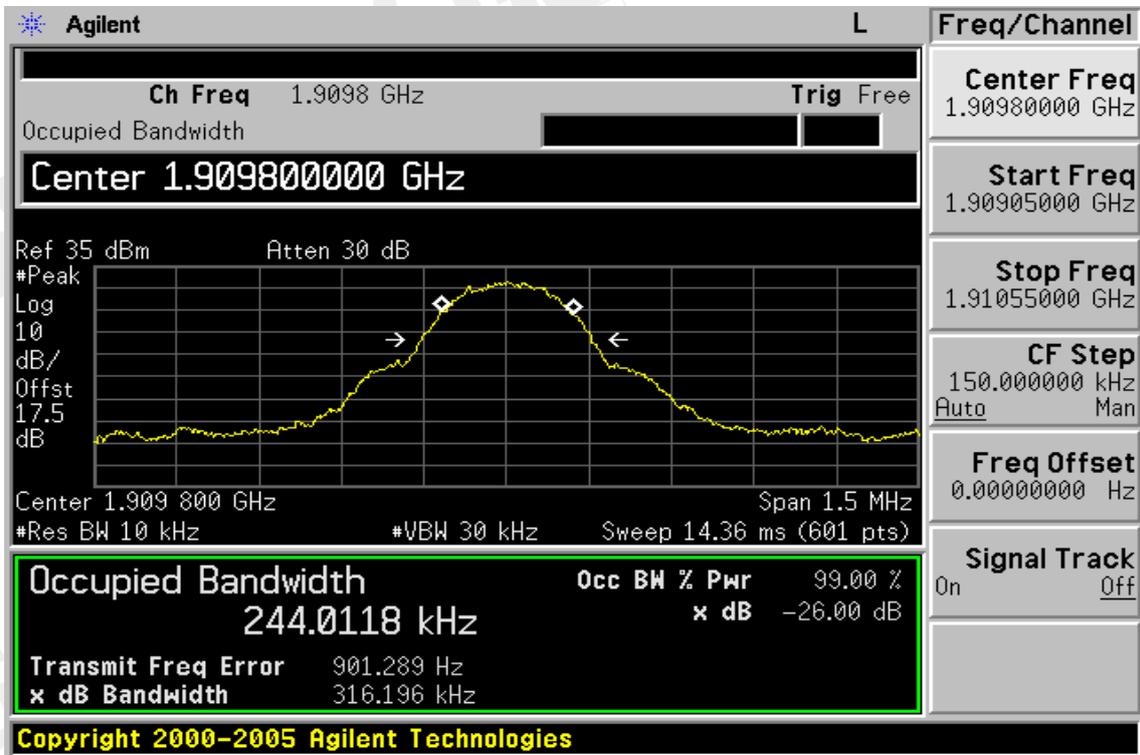


Figure 7-7: WCDMA II Channel Low

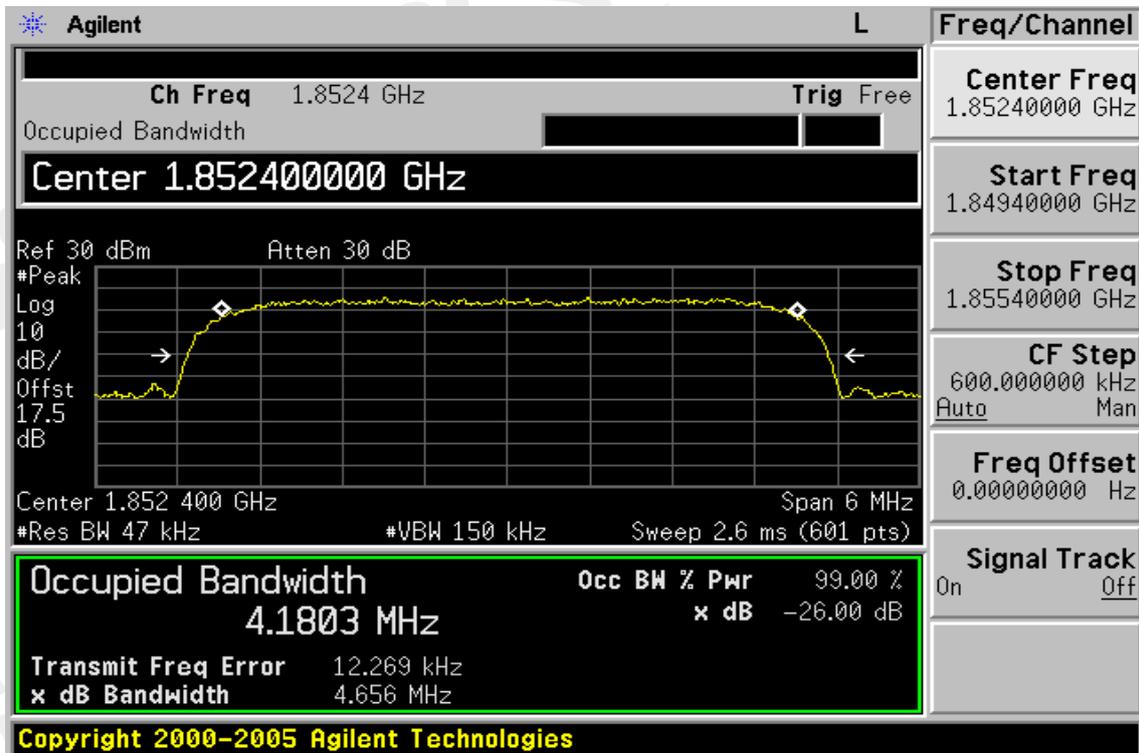


Figure 7-8 WCDMA II Channel Mid

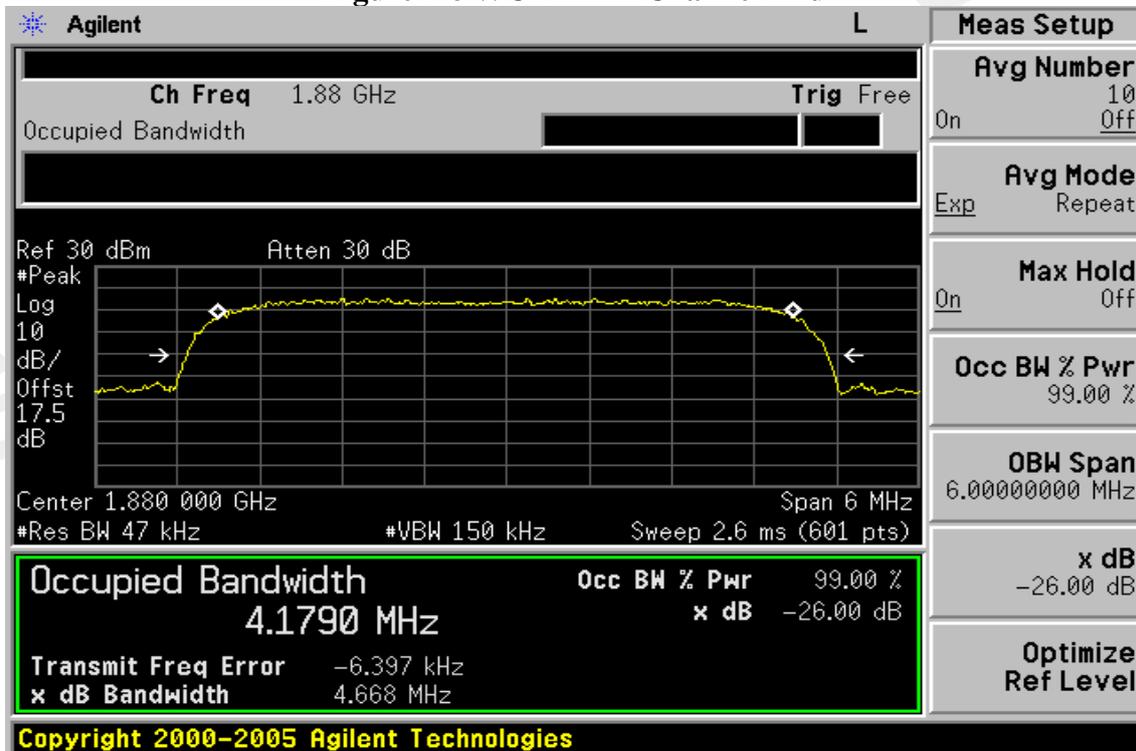


Figure 7-9: WCDMA II Channel High

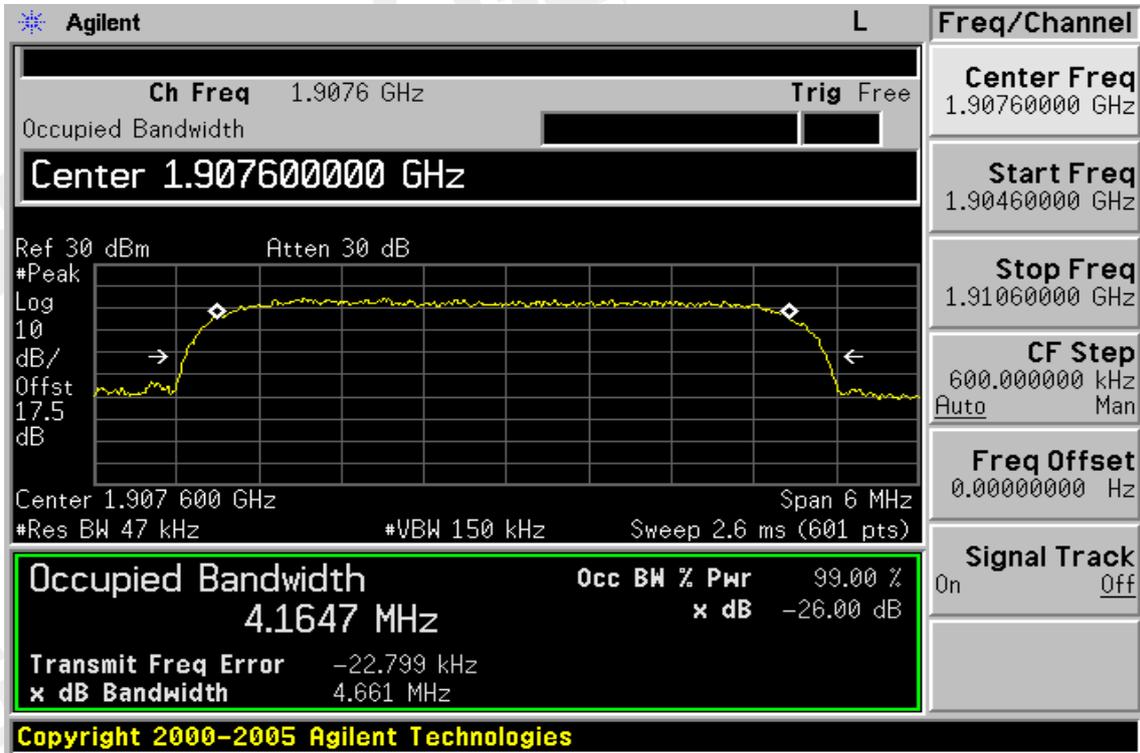


Figure 7-10: WCDMA V Channel Low

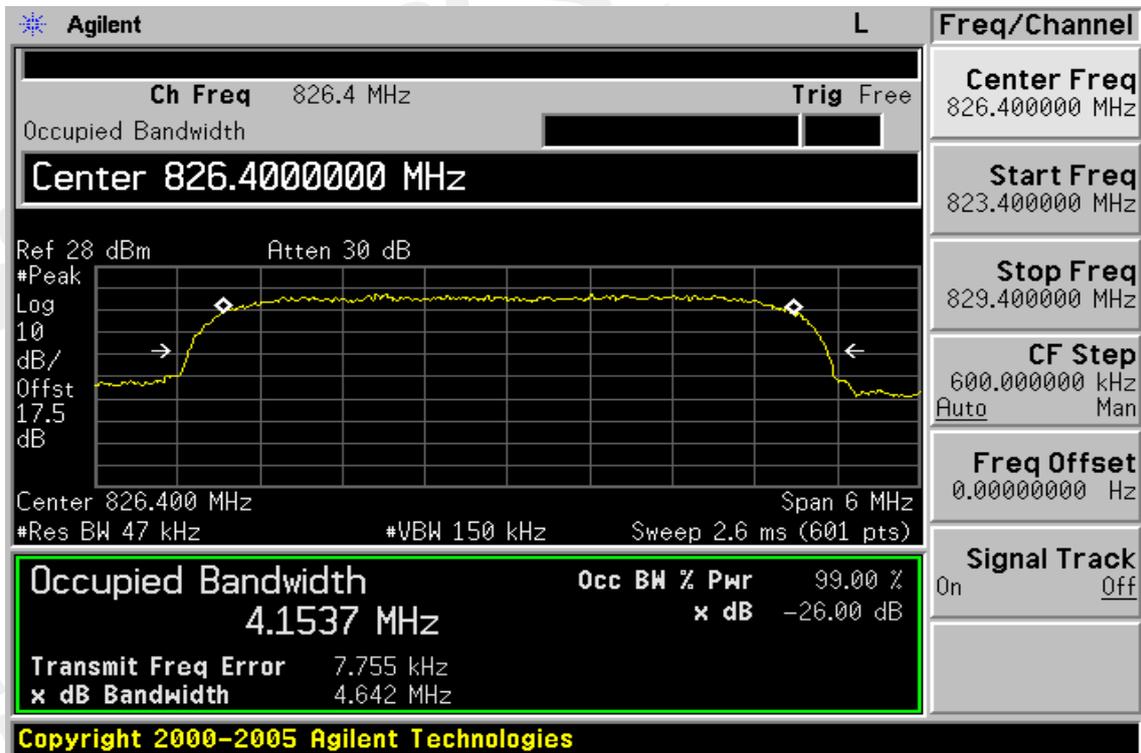


Figure 7-11 WCDMA V Channel Mid


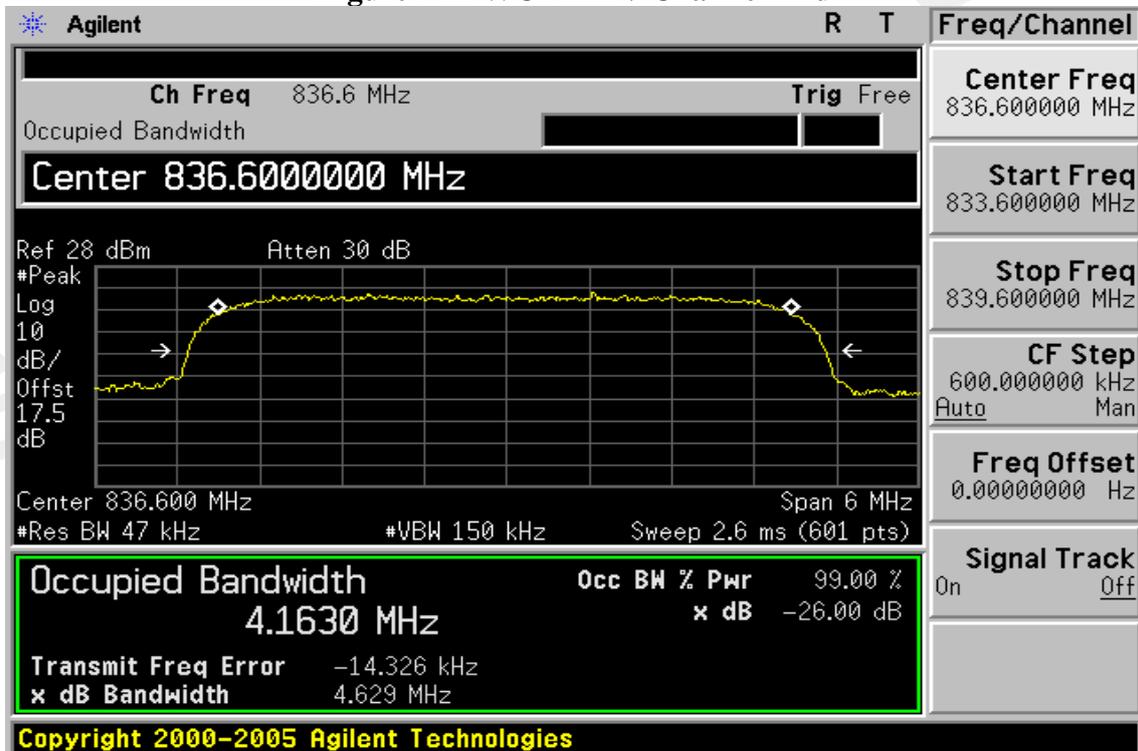


Figure 7-12: WCDMA V Channel High

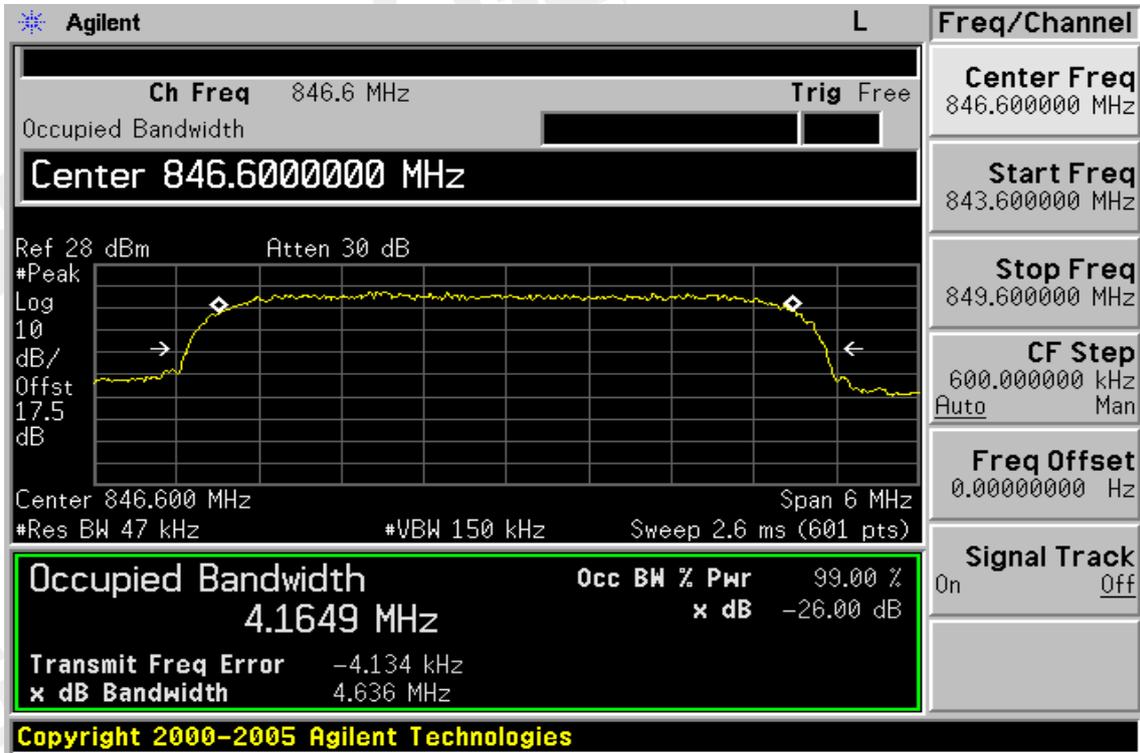


8. OUT OF BAND EMISSION AT ANTENNA TERMINALS

8.1 Standard Applicable

According to FCC §2.1051.

FCC §22.917(a),§24.238(a), the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than $43 + 10 \log$ (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)

8.2 Test SET-UP

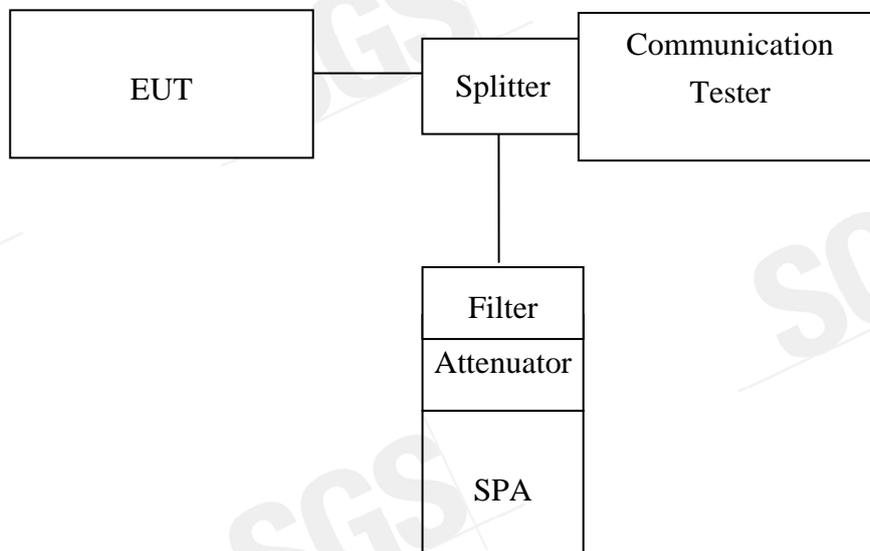

Note: Measurement setup for testing on Antenna connector

8.3 Measurement Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10 th harmonic.
Limit = -13dBm

Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

8.4 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2007	06/29/2008
Power Sensor	Anritsu	MA2490A	31431	06/28/2007	06/29/2008
Power Meter	Anritsu	ML2487A	6K00002070	06/28/2007	06/29/2008
Temperature Chamber	TERCHY	MHG-120LF	911009	11/11/2006	11/12/2007
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circuit	BW-S10W5	N/A	10/07/2007	10/06/2008
Attenuator	Mini-Circuit	BW-S6W5	N/A	10/07/2007	10/06/2008
Splitter	Mini-Circuit	ZFSC-2-10G	N/A	10/07/2007	10/06/2008
Signal Generator	R&S	SMR40	100210	11/09/2006	11/10/2007
DC Power Supply	Agilent	6038A	2929A-07548	01/06/2007	01/05/2008
Band reject filter	Wicro-tronics	BRM13462	001	06/28/2007	06/29/2008

8.5 Measurement Result

Figure 8-1: Out of Band emission at antenna terminals– GSM850 Channel Lowest




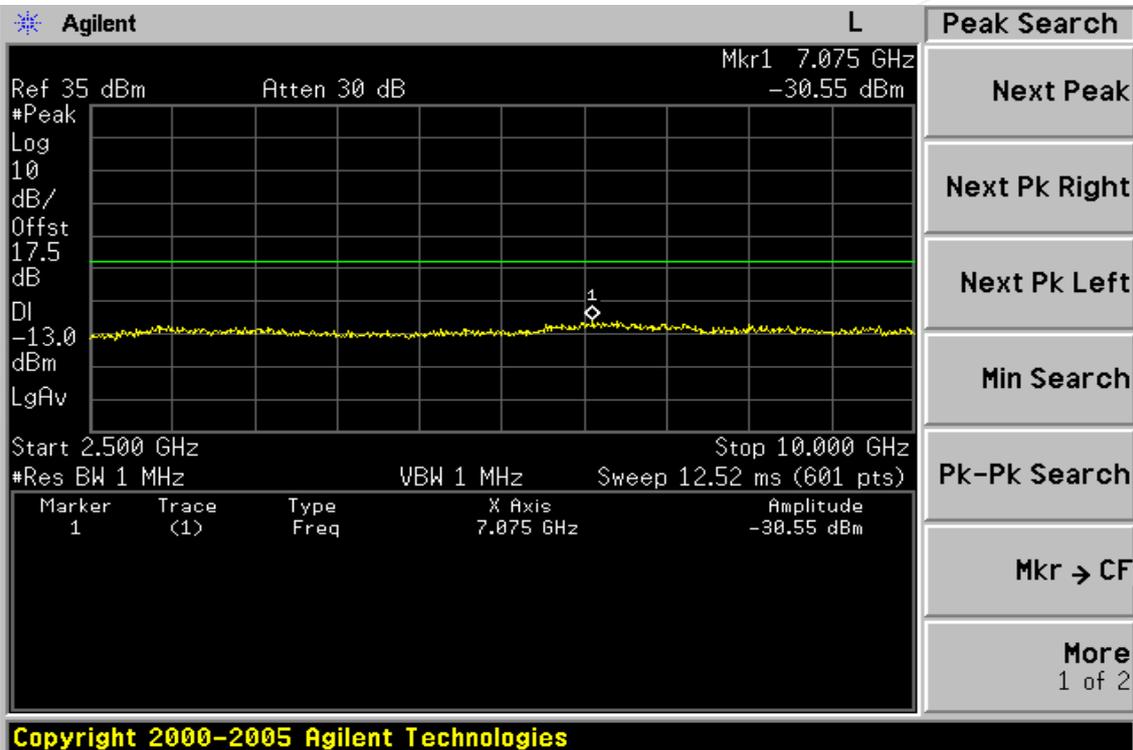


Figure 8-2: Out of Band emission at antenna terminals –GSM850 Channel Mid

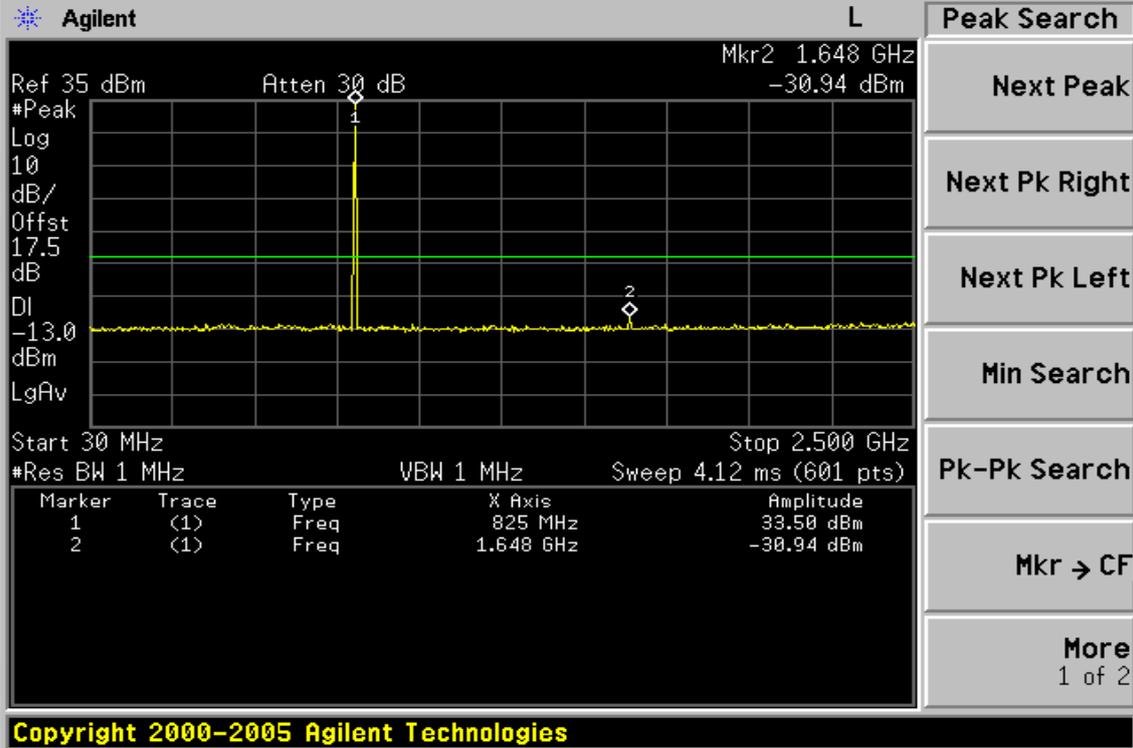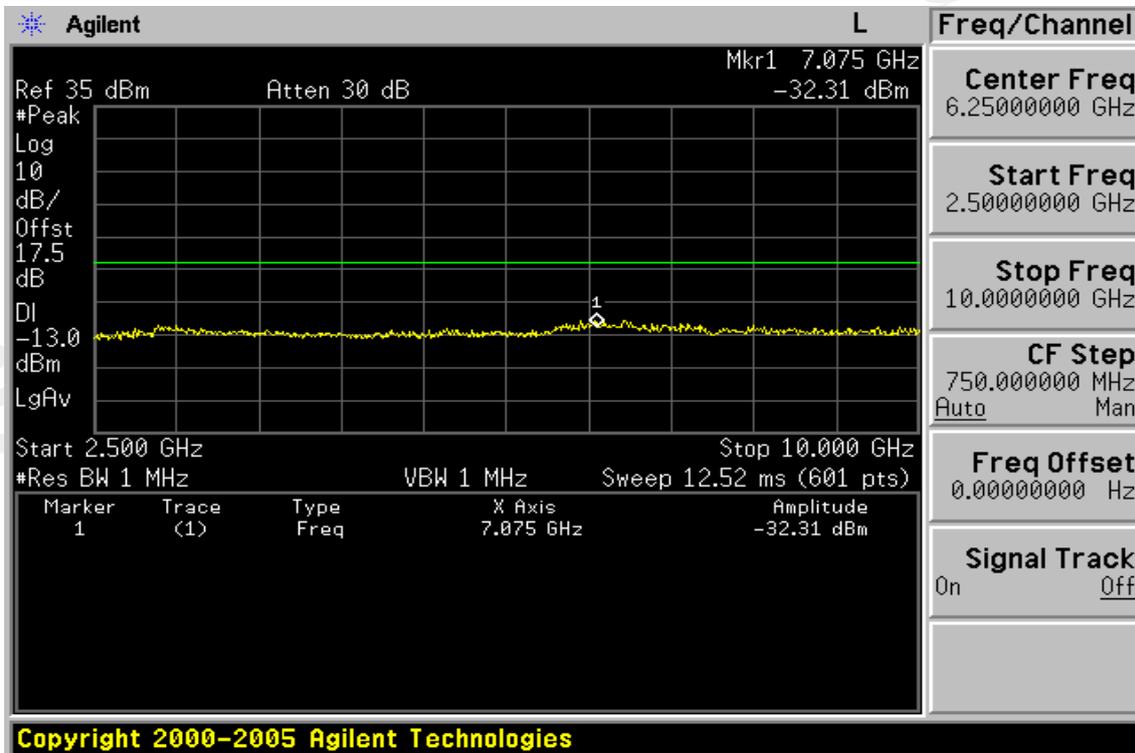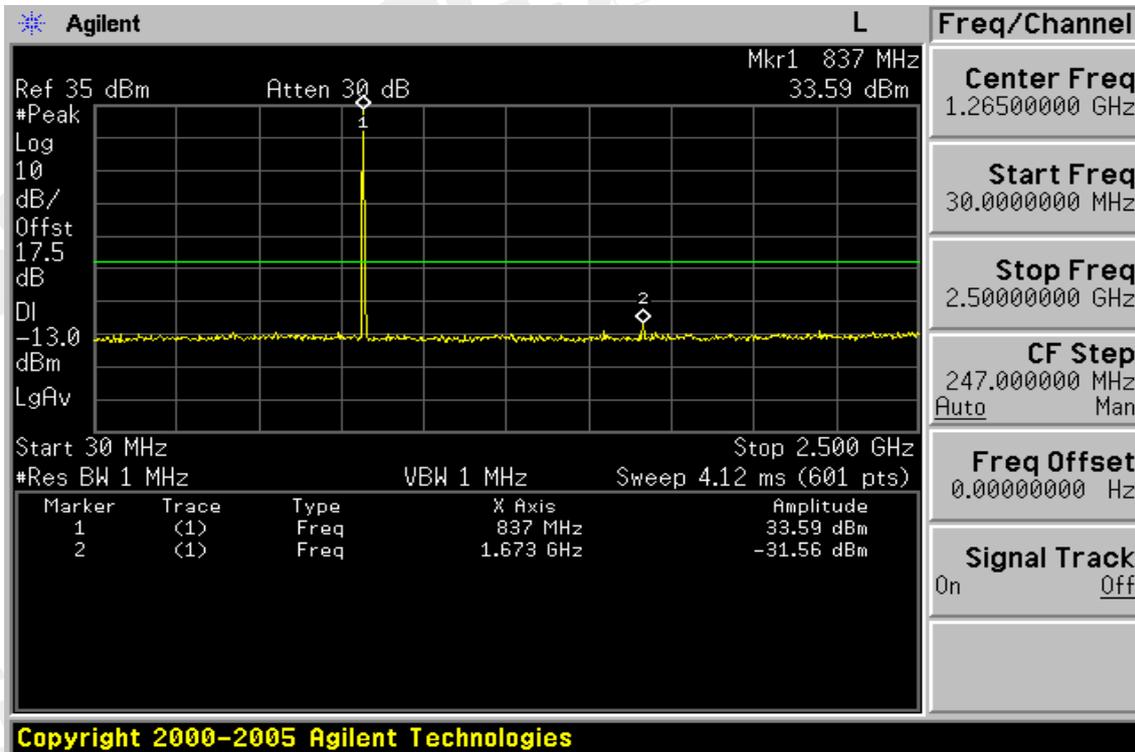

This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

Figure 8-3: Out of Band emission at antenna terminals–GSM850 Channel Highest

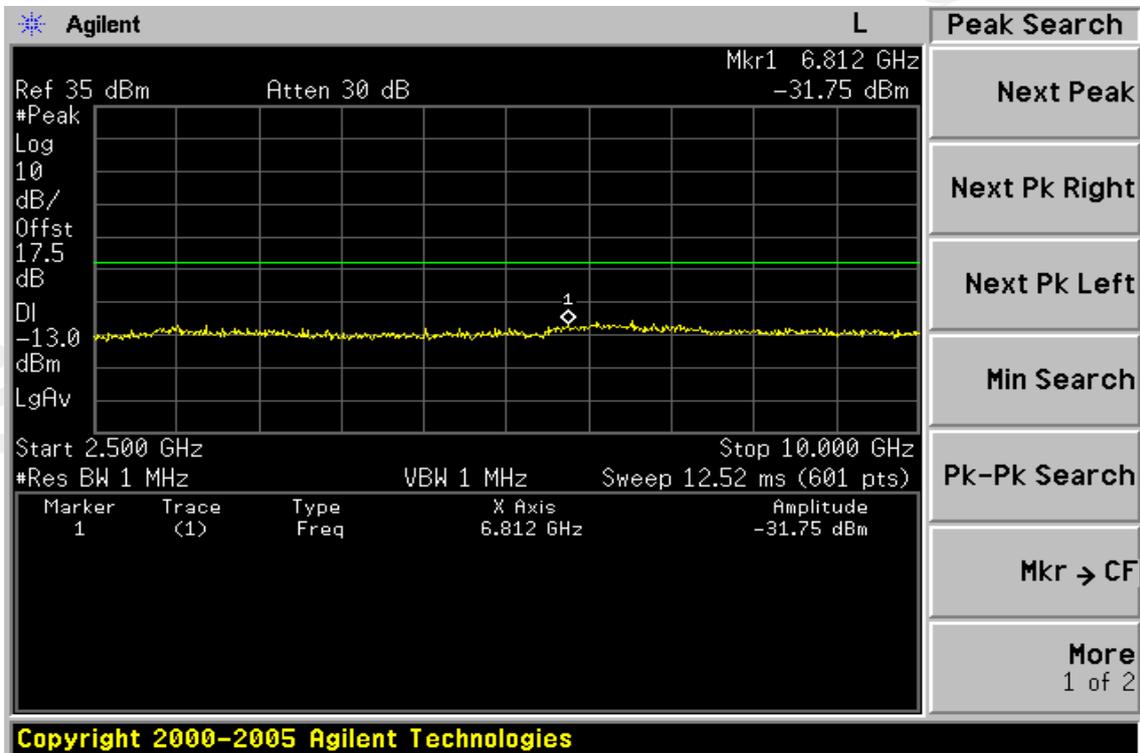
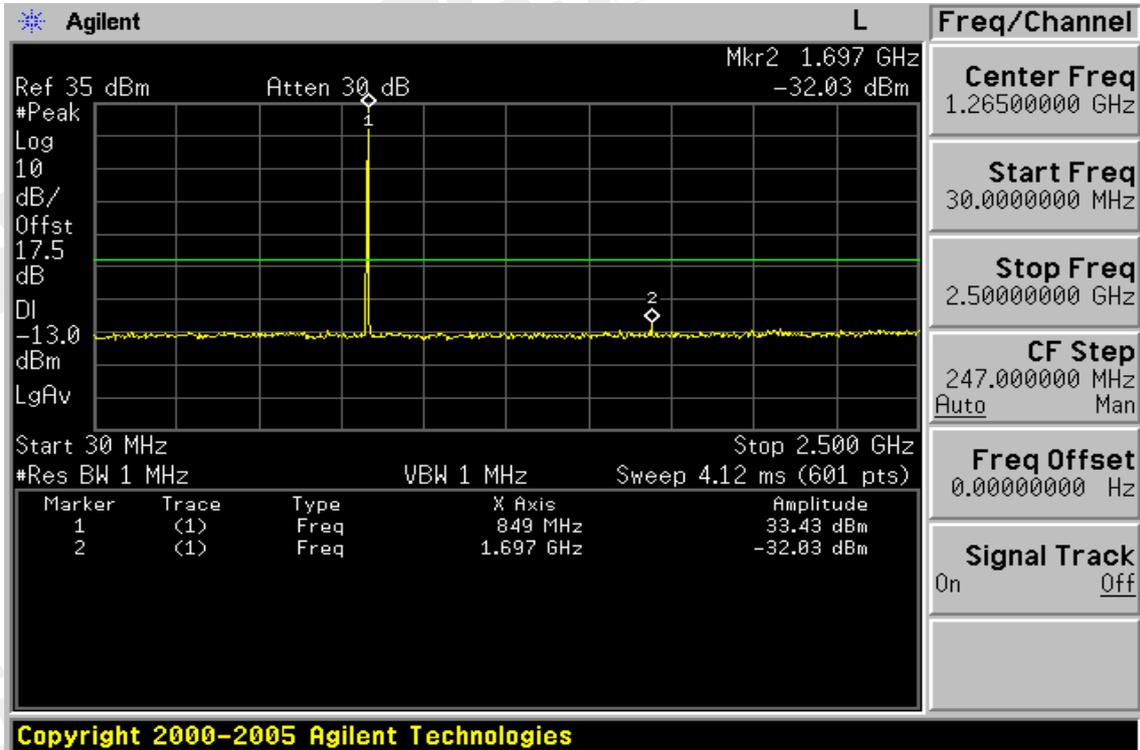


Figure 8-4: Bad edge emission at antenna terminals – GSM850 Channel Lowest

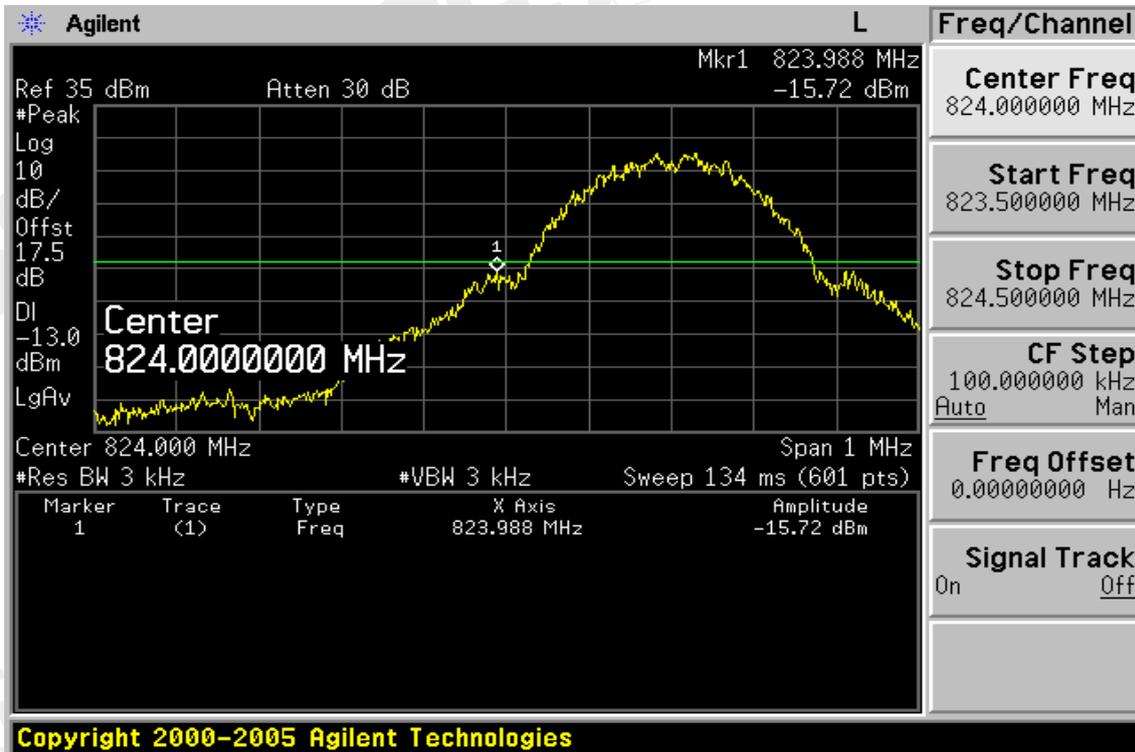


Figure 8-5: Band edge emission at antenna terminals – GSM850 Channel Highest



Figure 8-6: Out of Band emission at antenna terminals– PCS1900 Channel Lowest

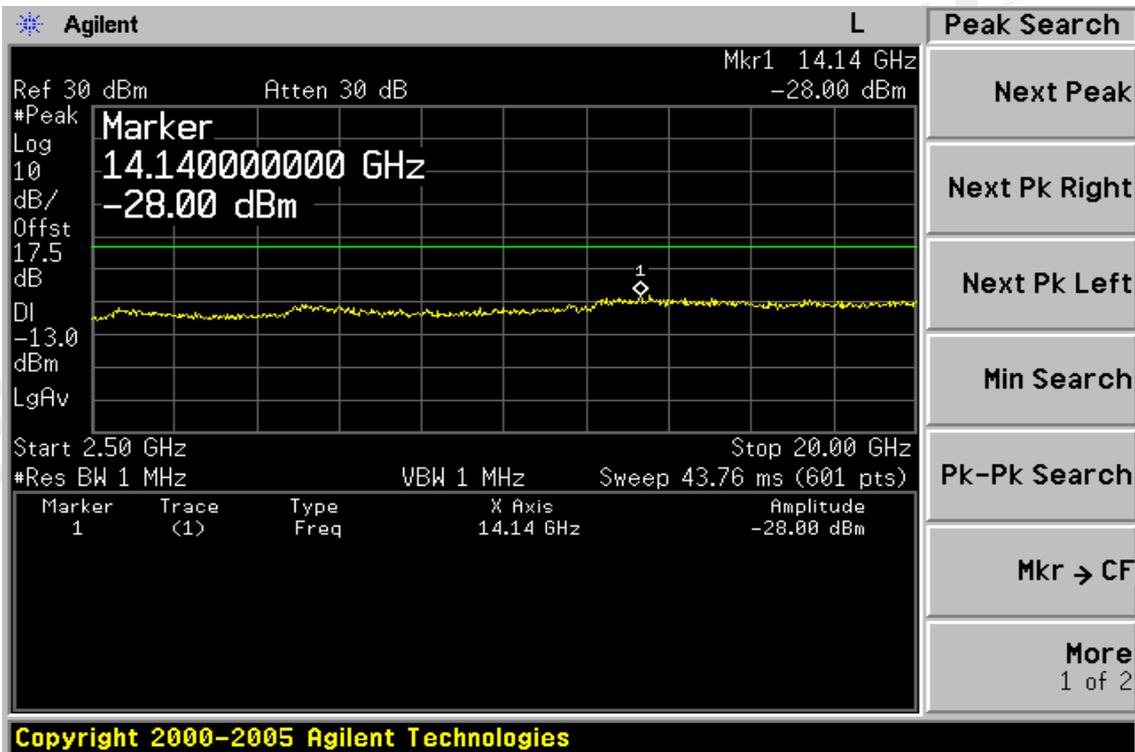
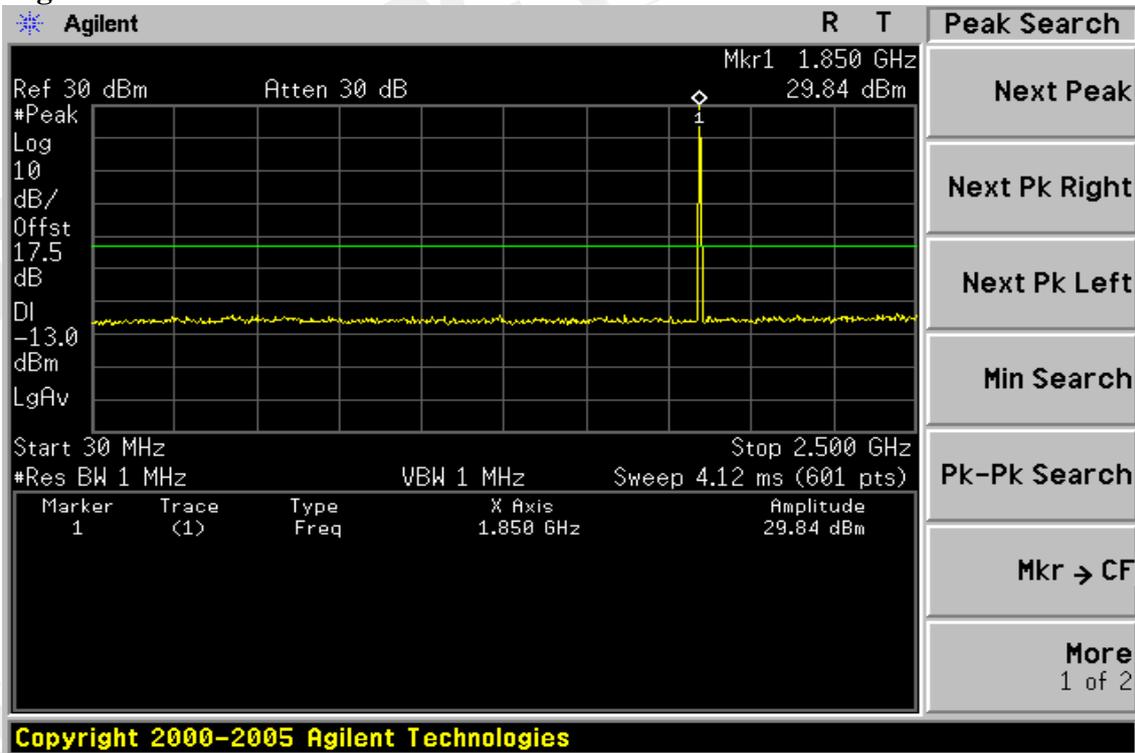


Figure 8-7: Out of Band emission at antenna terminals –PCS1900 Channel Mid

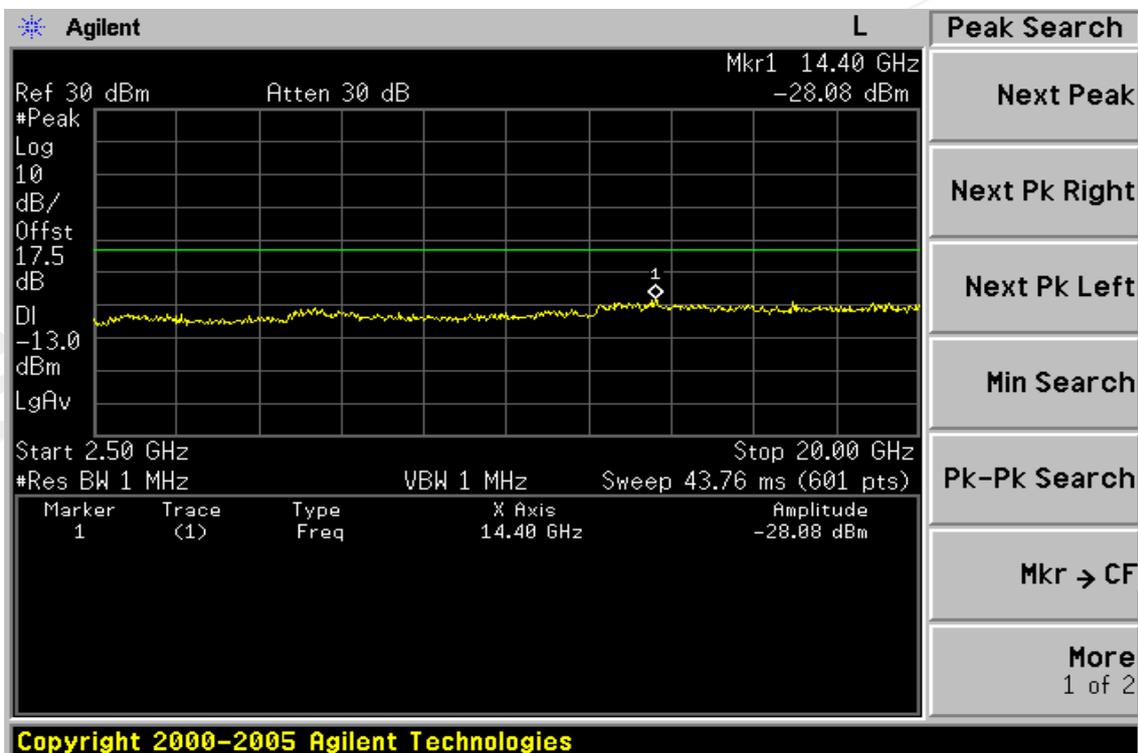
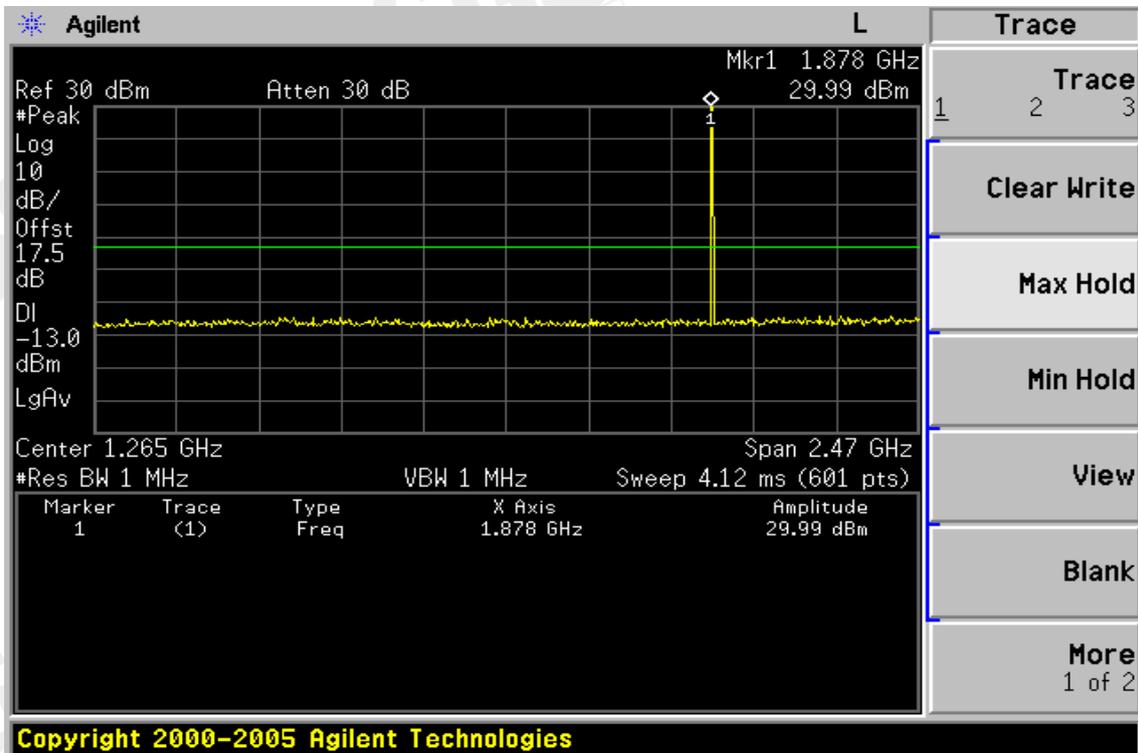


Figure 8-8: Out of Band emission at antenna terminals–PCS1900 Channel Highest

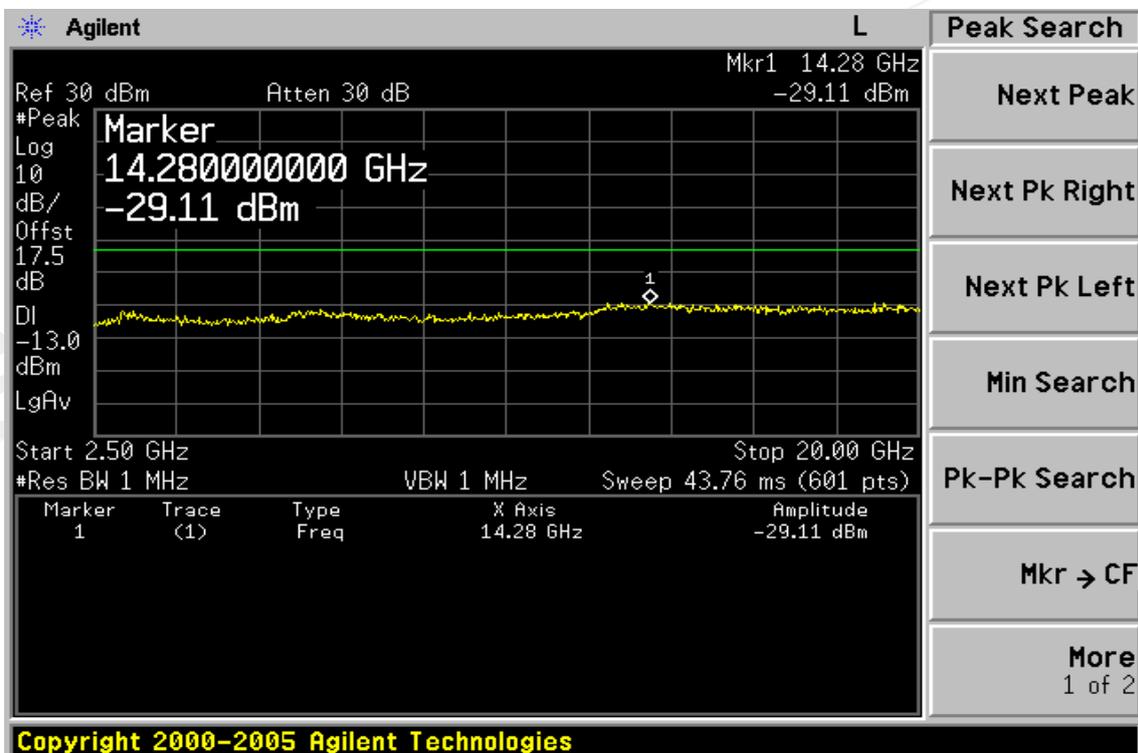
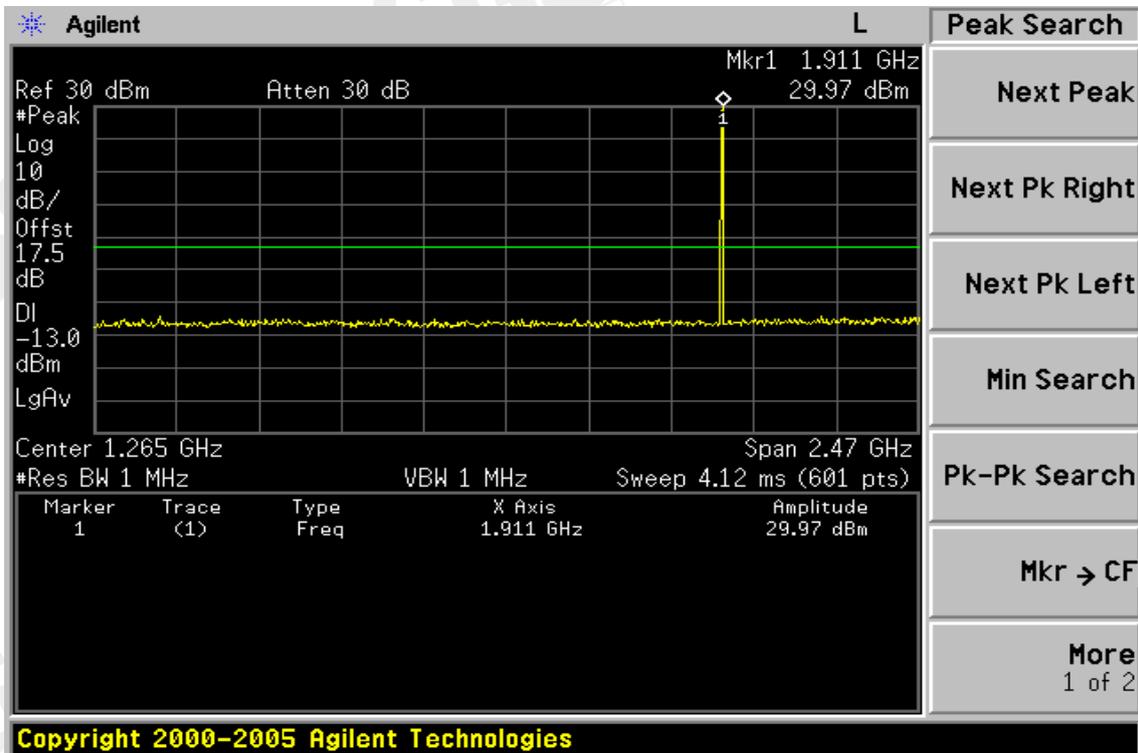


Figure 8-9: Bad edge emission at antenna terminals – PCS1900 Channel Lowest

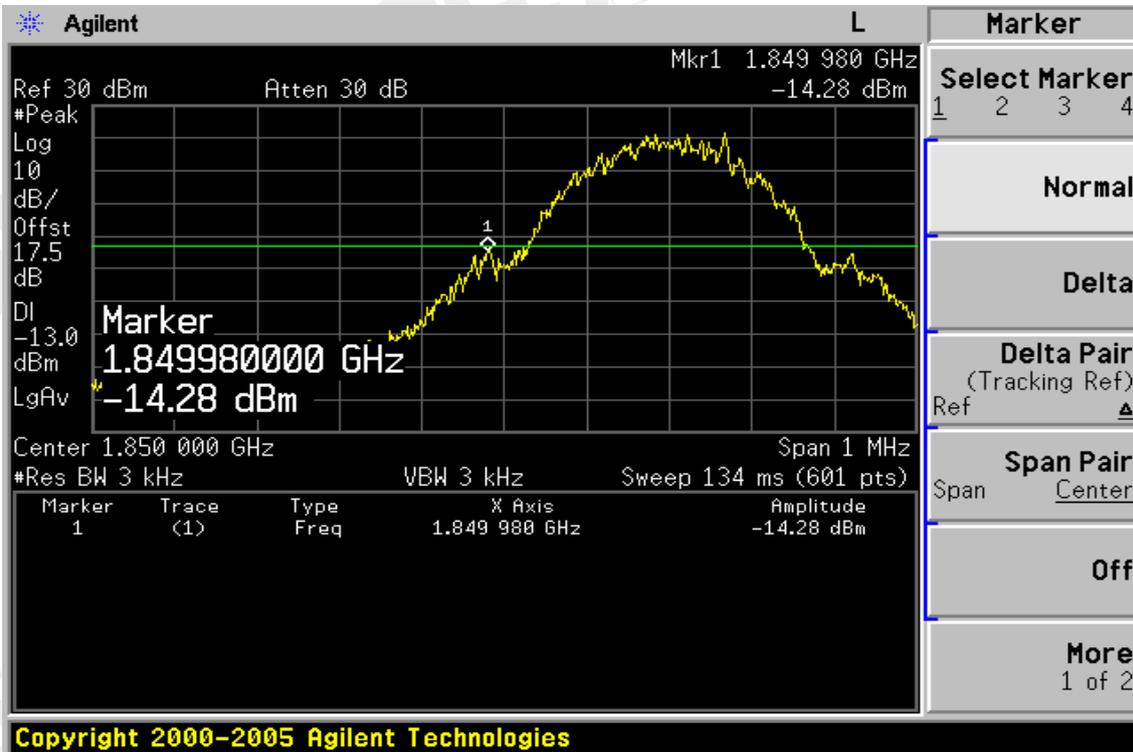


Figure 8-10: Band edge emission at antenna terminals – PCS1900 Channel Highest

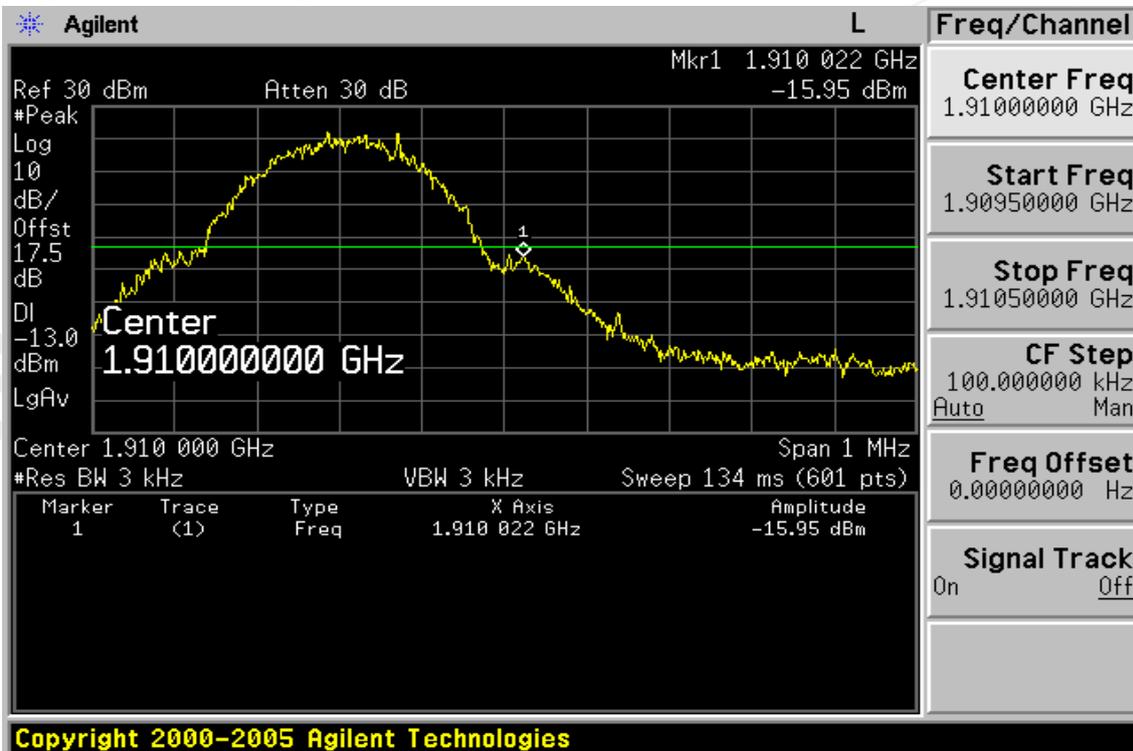


Figure 8-10: Out of Band emission at antenna terminals– WCDMA Band II Channel Lowest

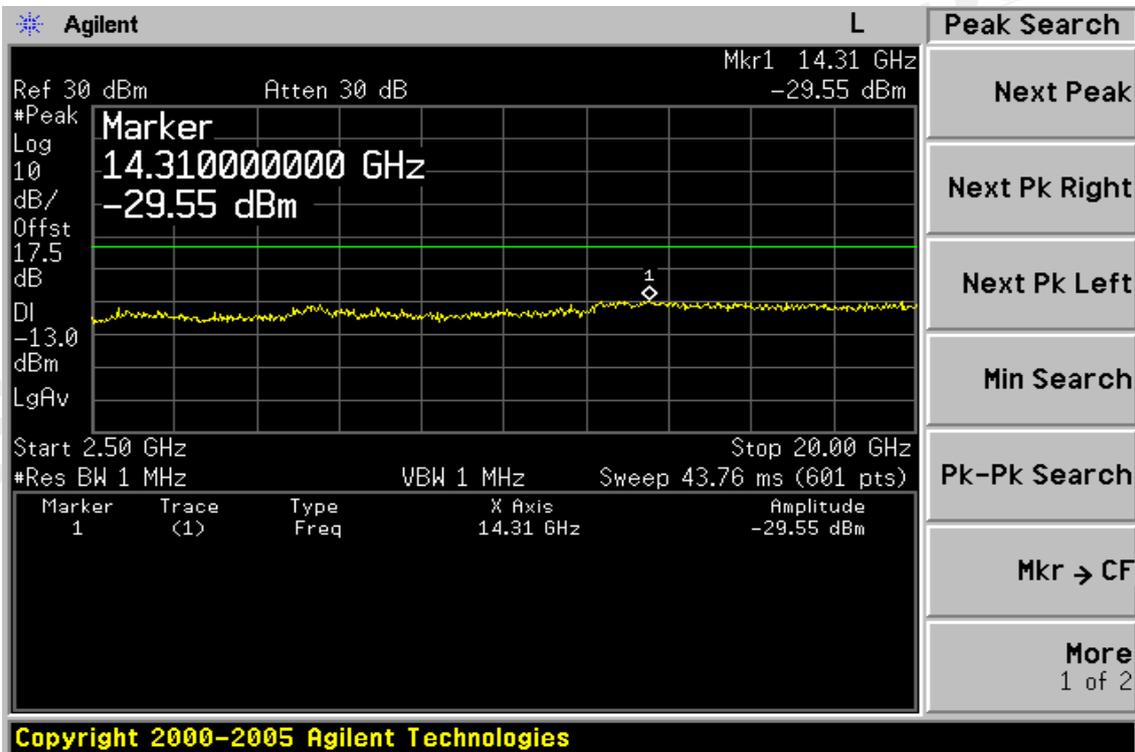
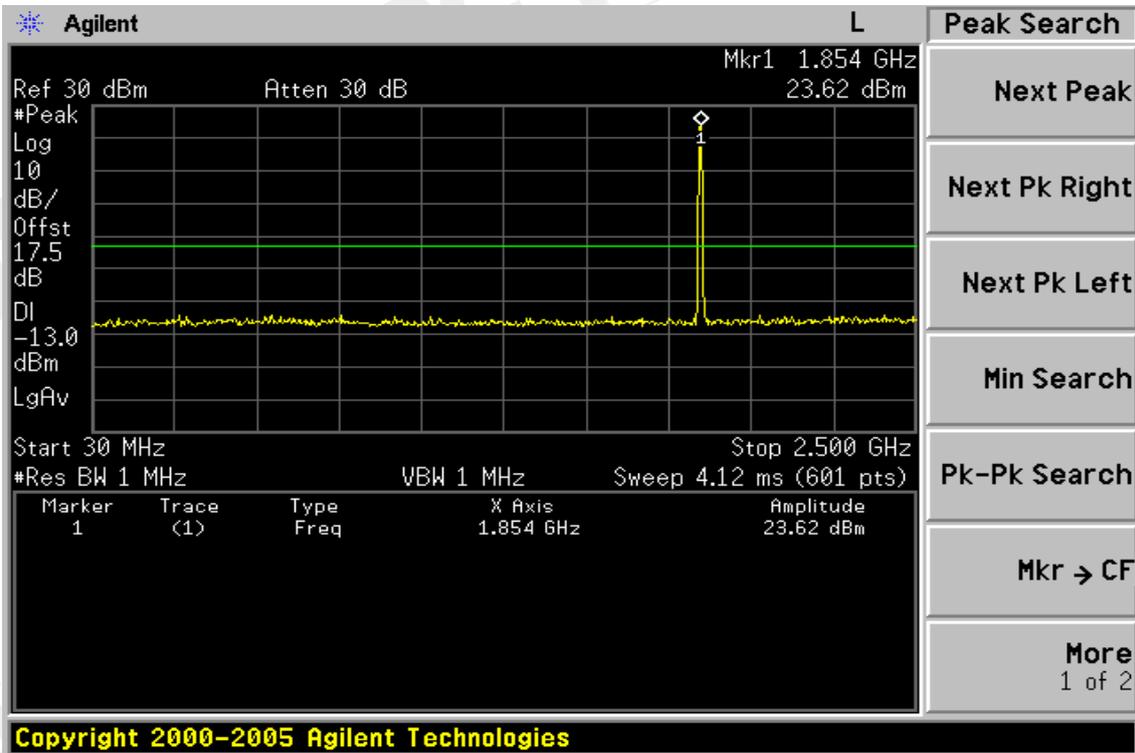


Figure 8-11: Out of Band emission at antenna terminals –WCDMA Band II Channel Mid

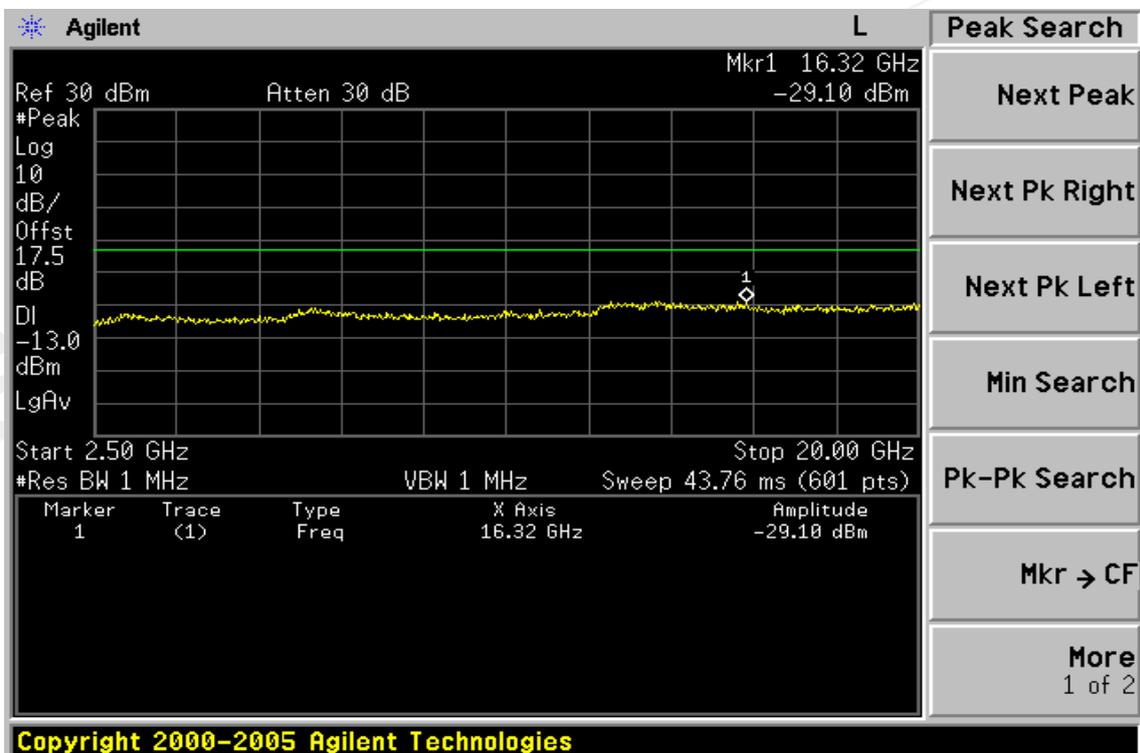
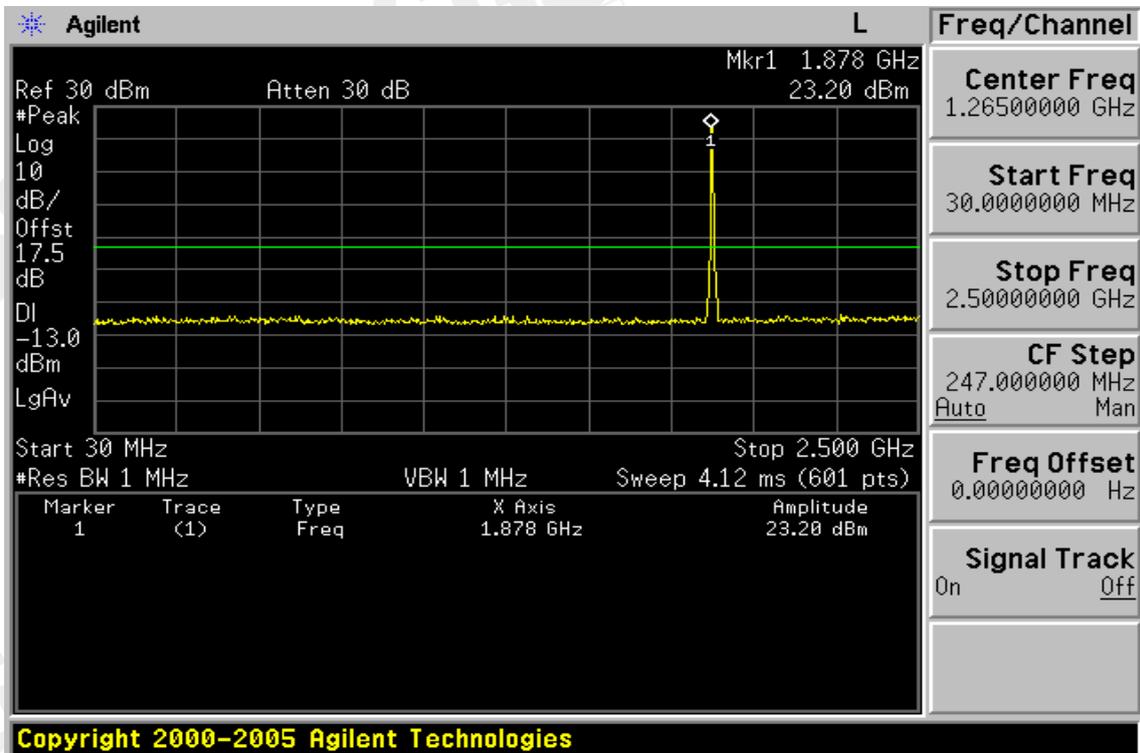


Figure 8-12: Out of Band emission at antenna terminals–WCDMA Band II Channel Highest

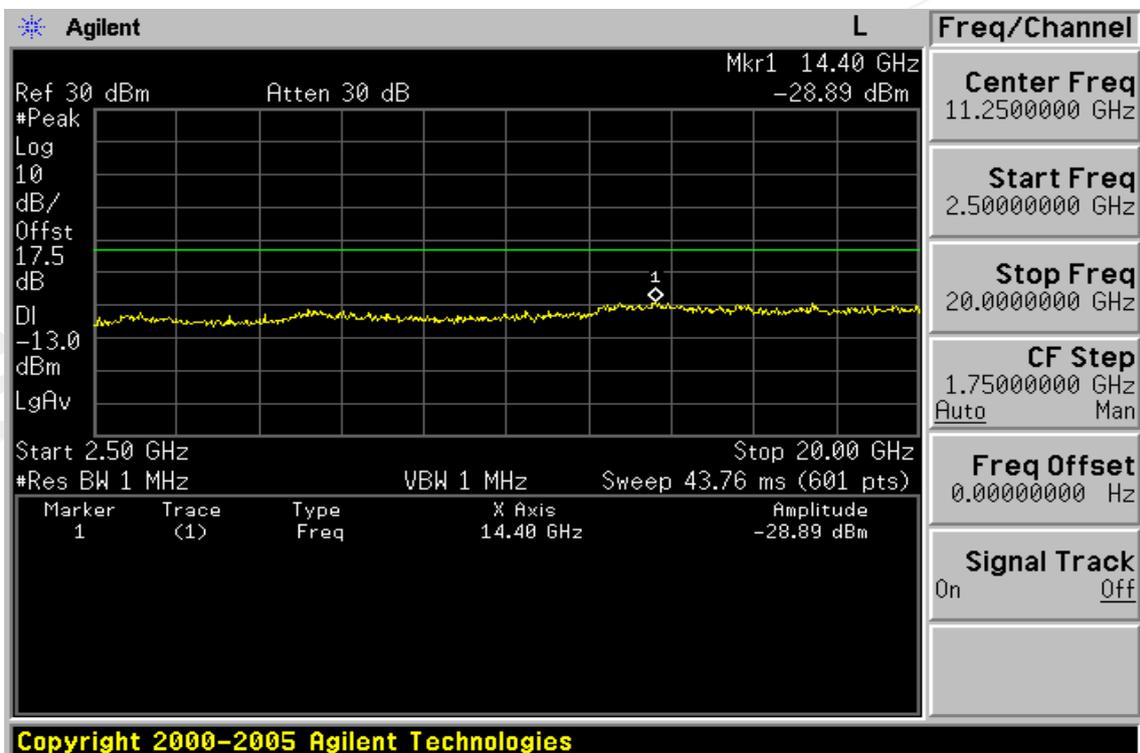
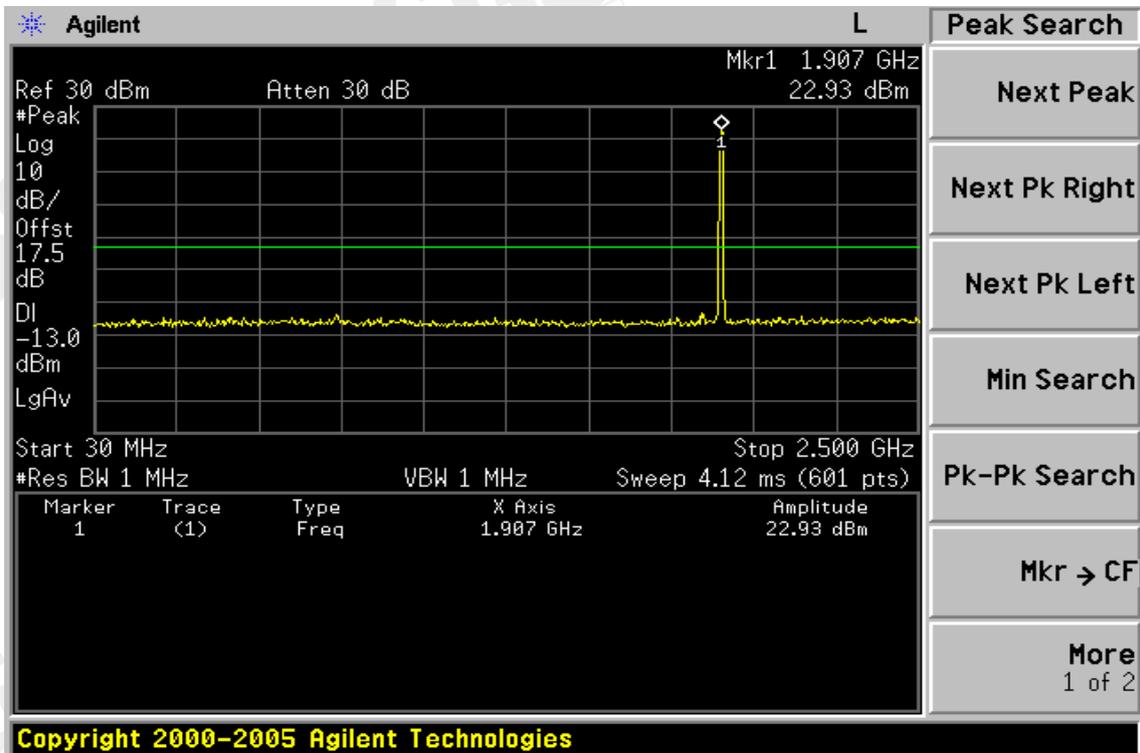


Figure 8-13: Bad edge emission at antenna terminals – WCDMA Band II Channel Lowest

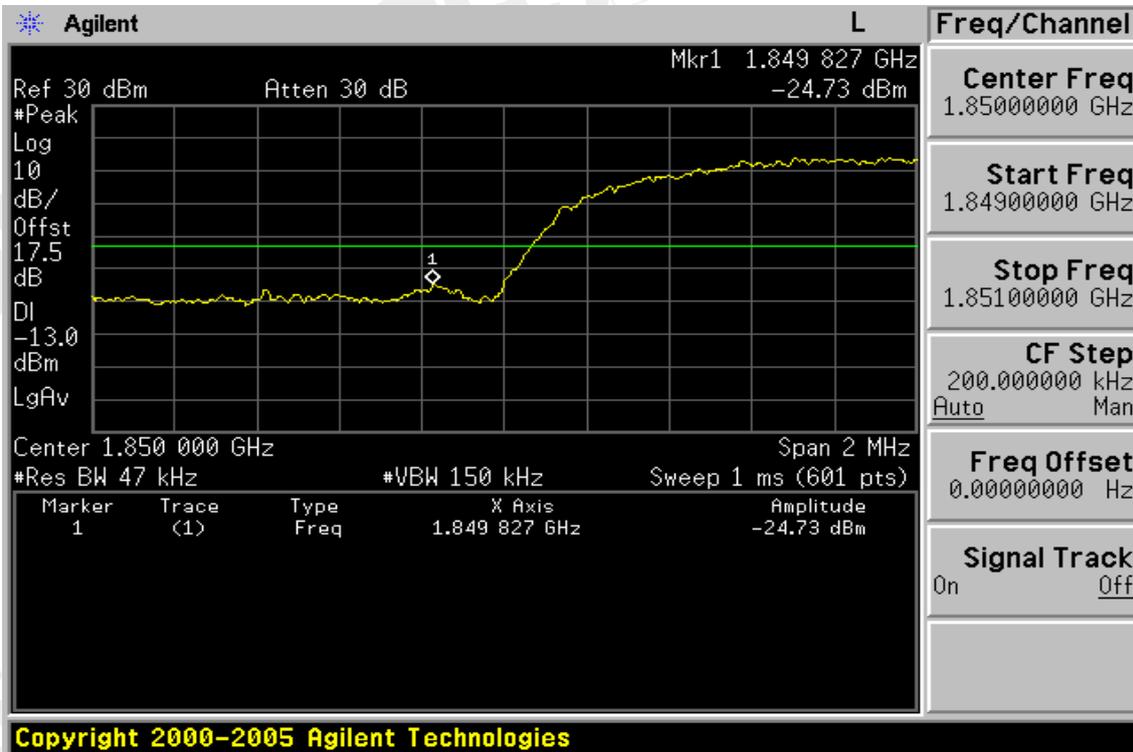


Figure 8-10: Band edge emission at antenna terminals – WCDMA Band II Channel Highest

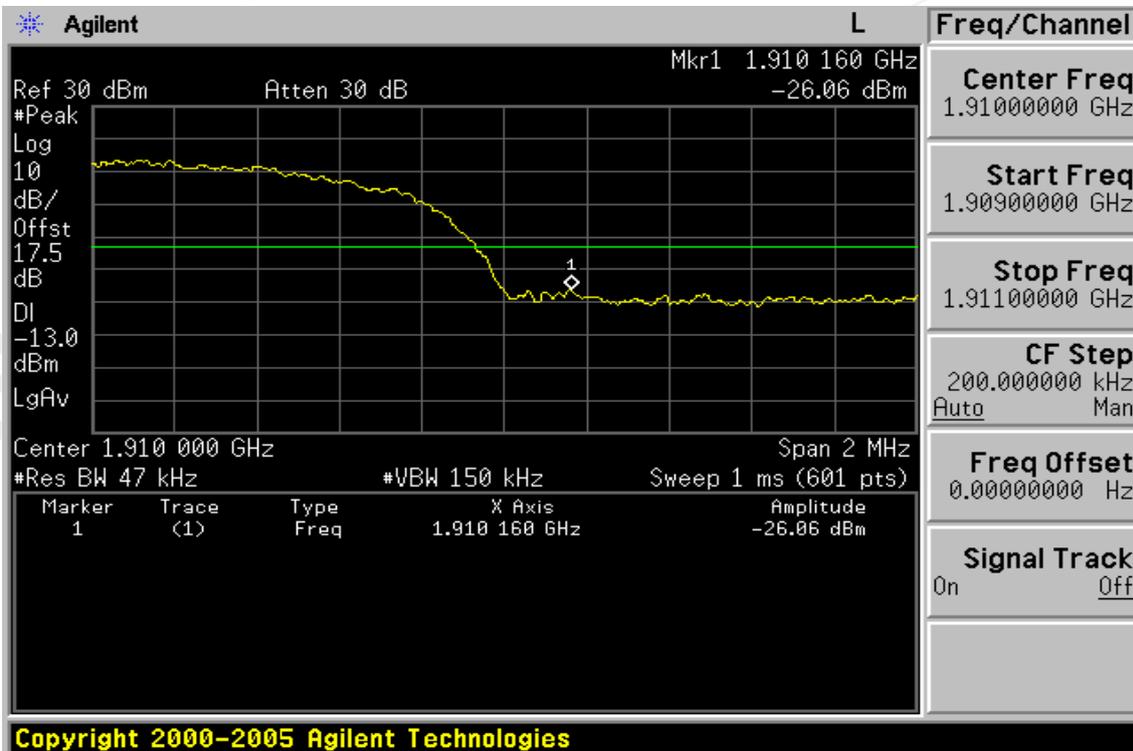


Figure 8-14: Out of Band emission at antenna terminals– WCDMA Band V Channel Lowest

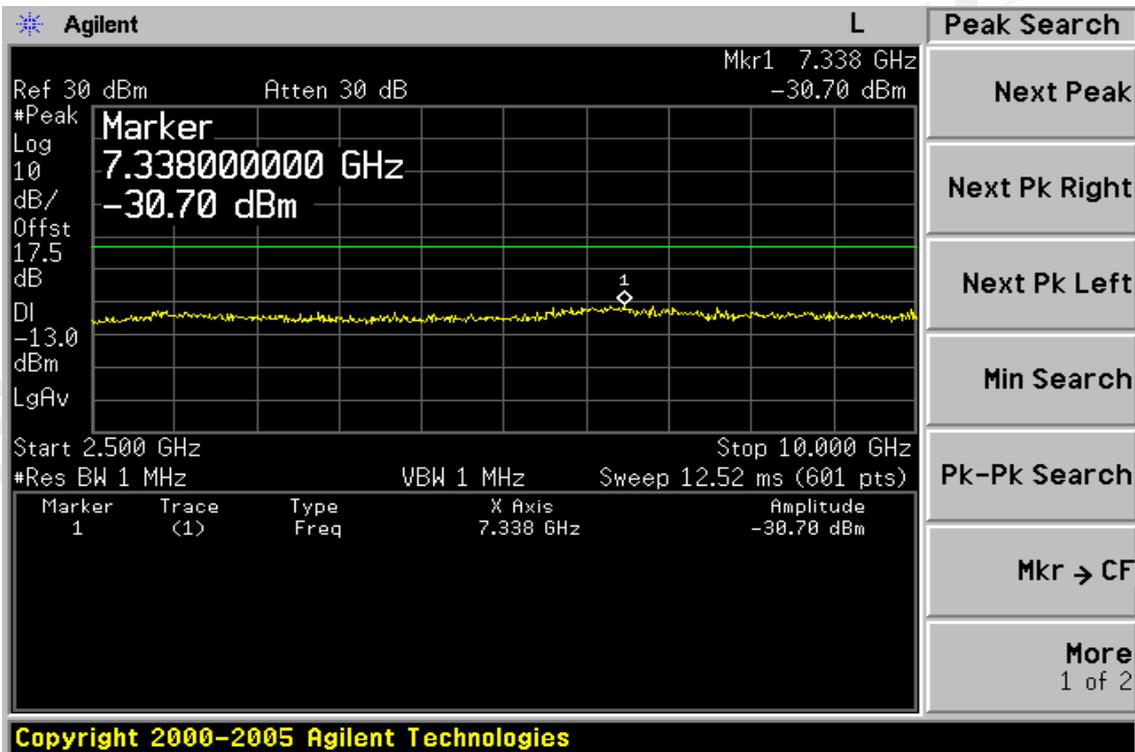
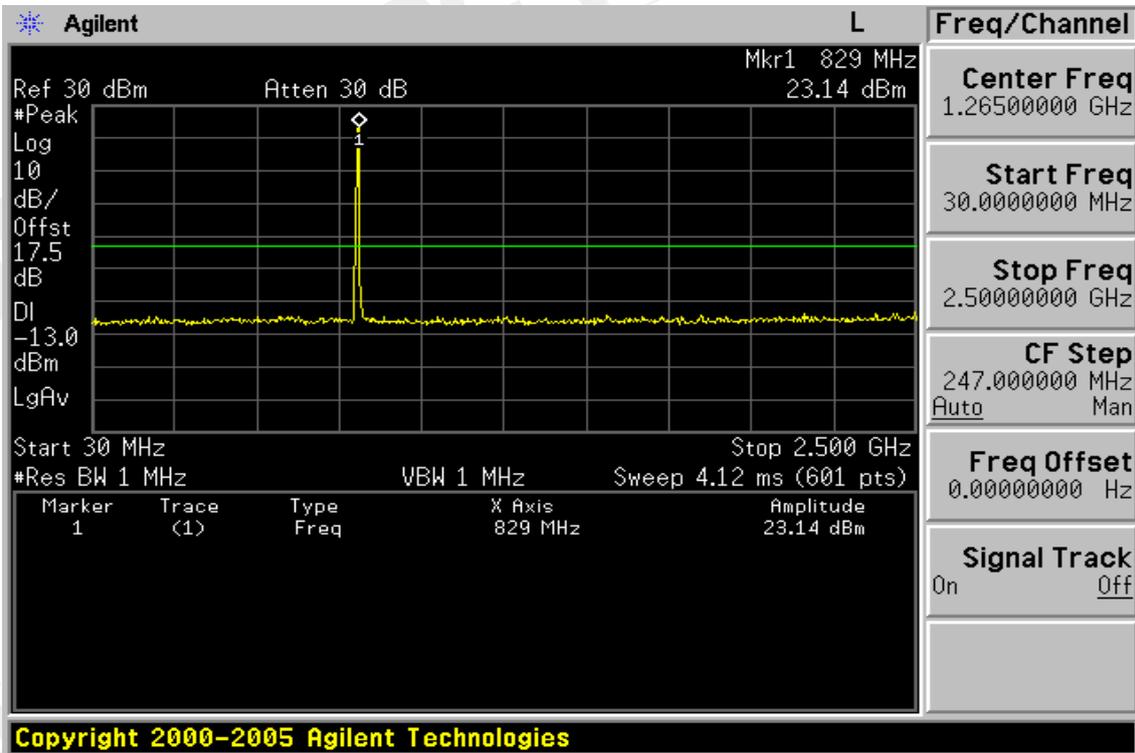


Figure 8-15: Out of Band emission at antenna terminals –WCDMA Band V Channel Mid

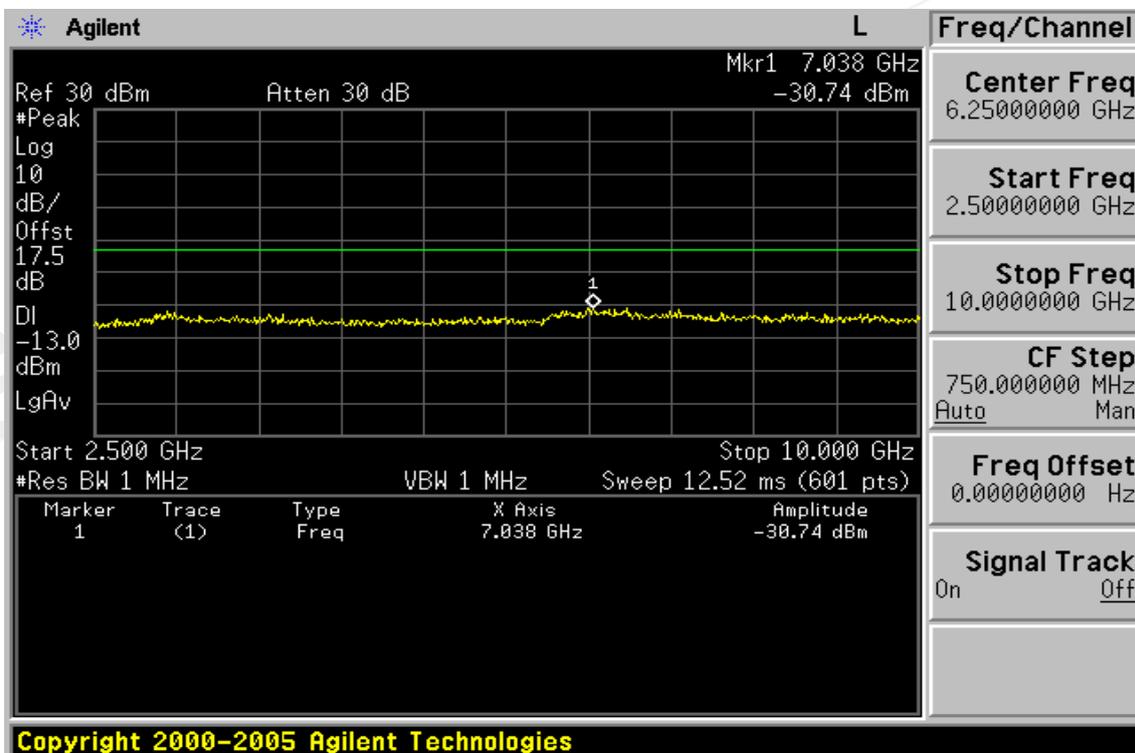
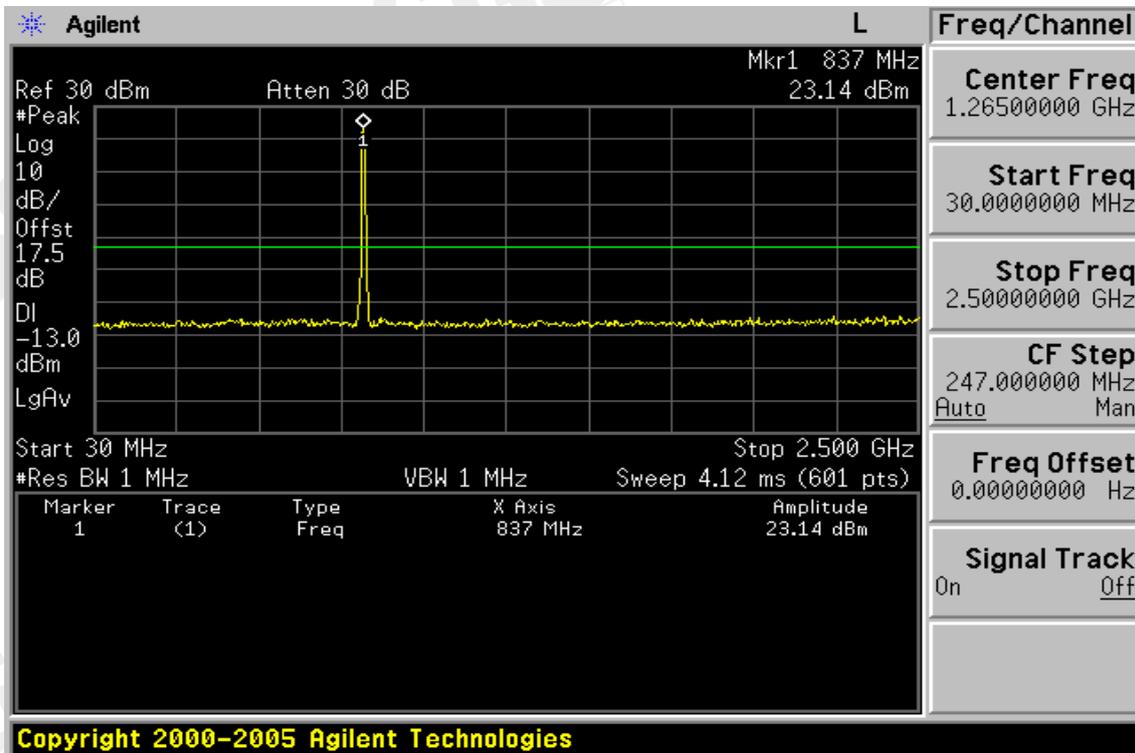


Figure 8-16: Out of Band emission at antenna terminals–WCDMA Band V Channel Highest

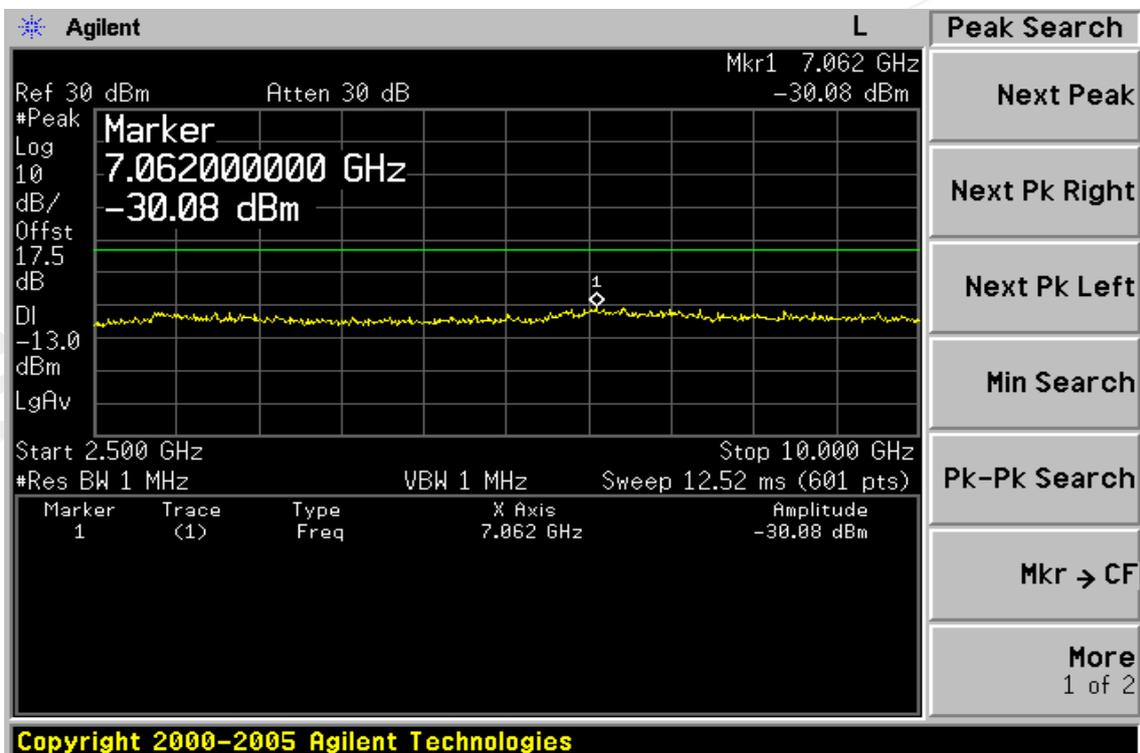
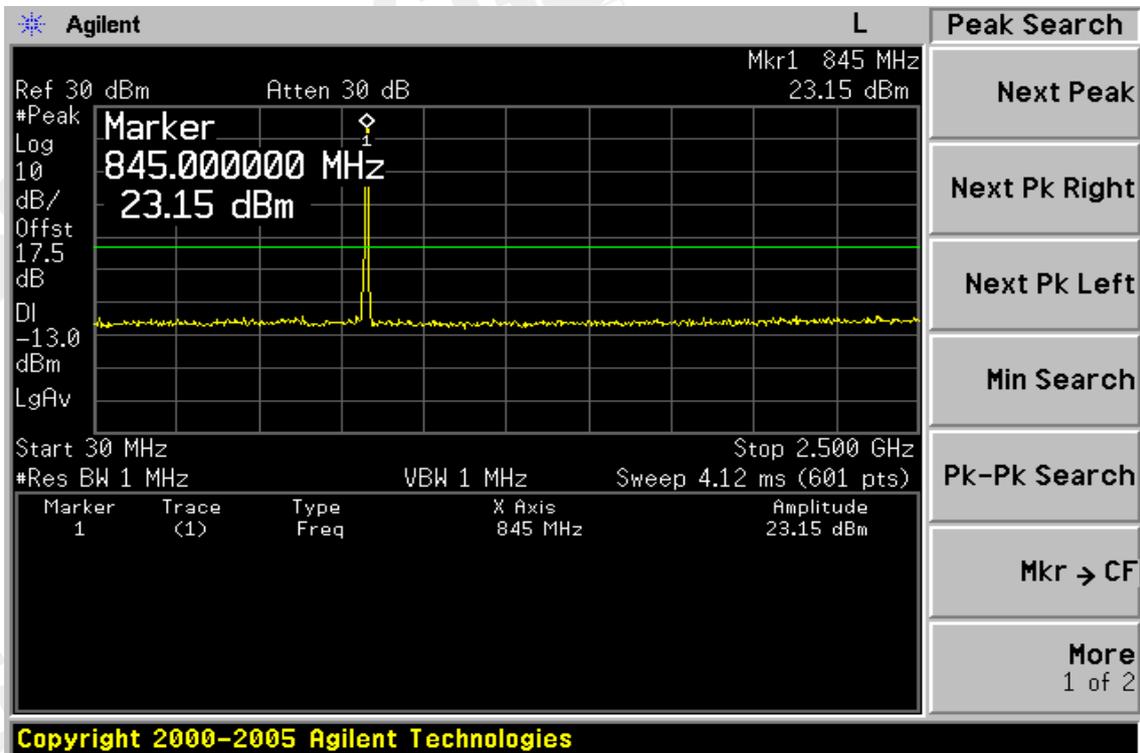


Figure 8-17: Bad edge emission at antenna terminals – WCDMA Band V Channel Lowest


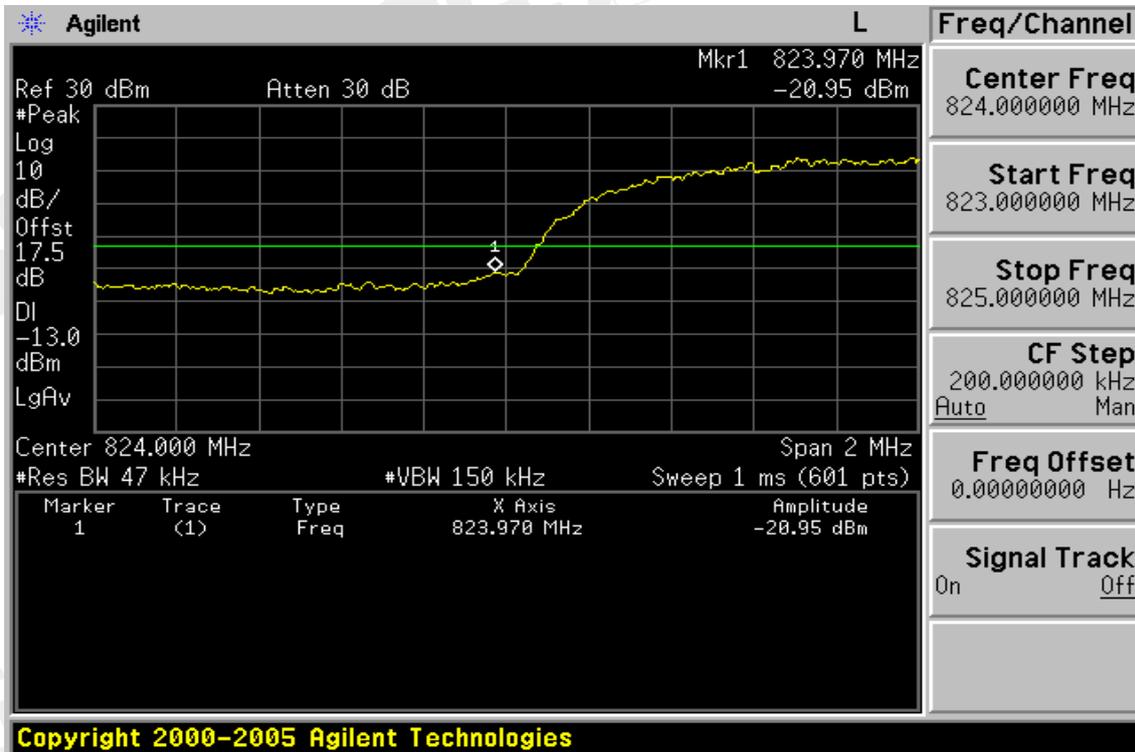


Figure 8-18: Band edge emission at antenna terminals – WCDMA Band V Channel Highest

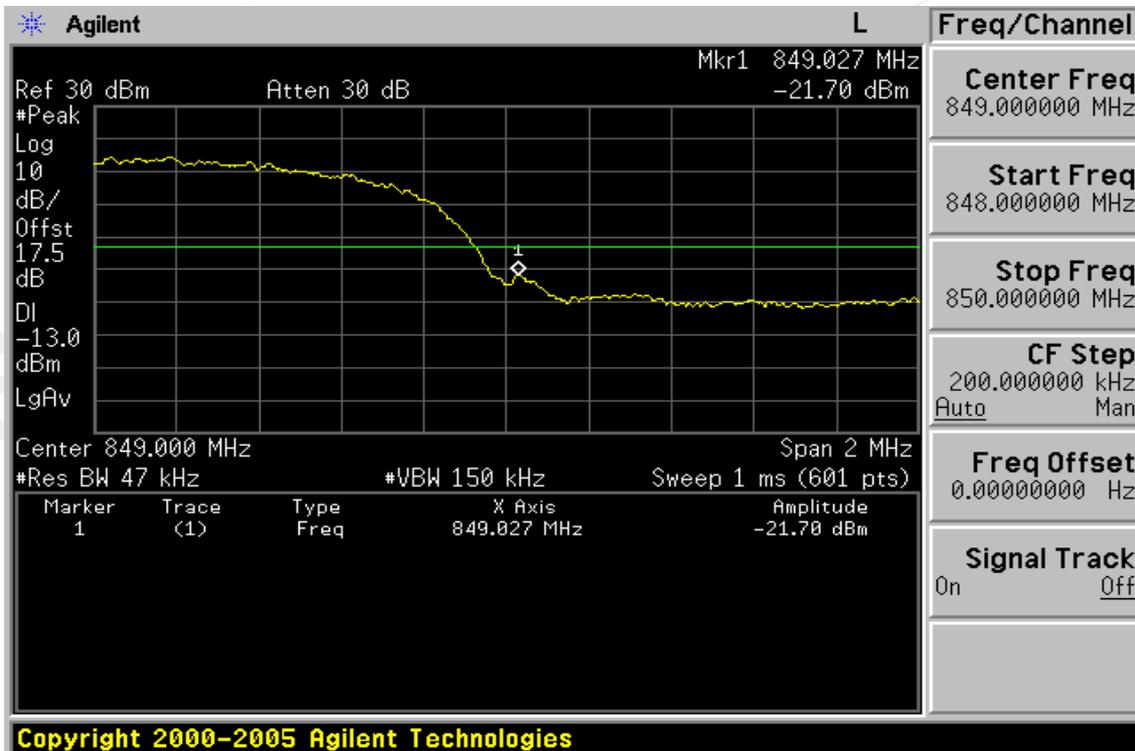

9. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT


9.1 Standard Applicable

According to FCC §2.1053,


FCC §22.917(a),§24.238(a), the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than $43 + 10 \log$ (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)

9.2 EUT Setup (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

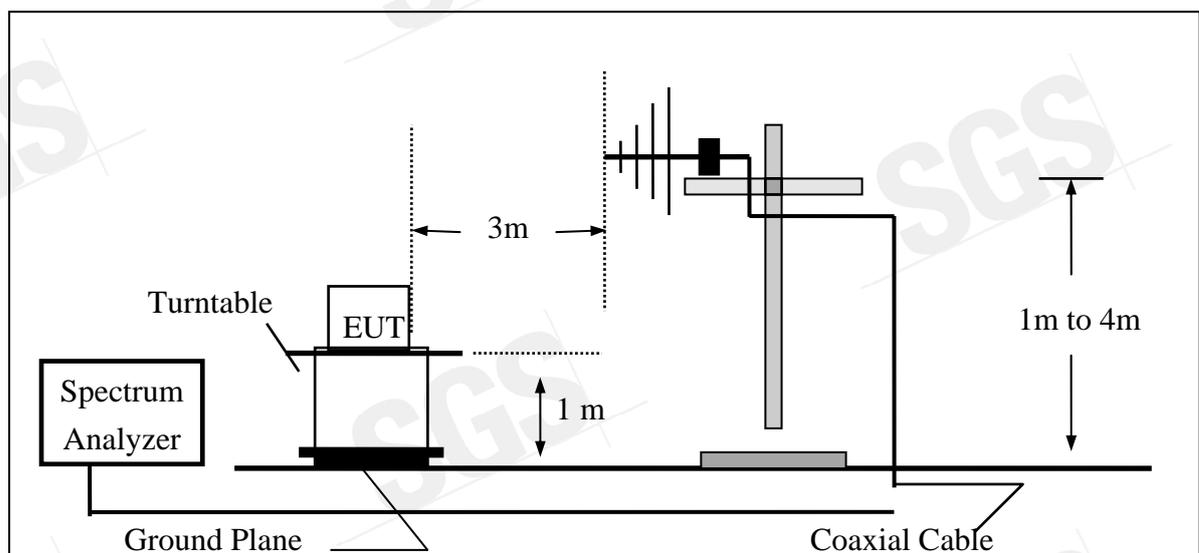

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

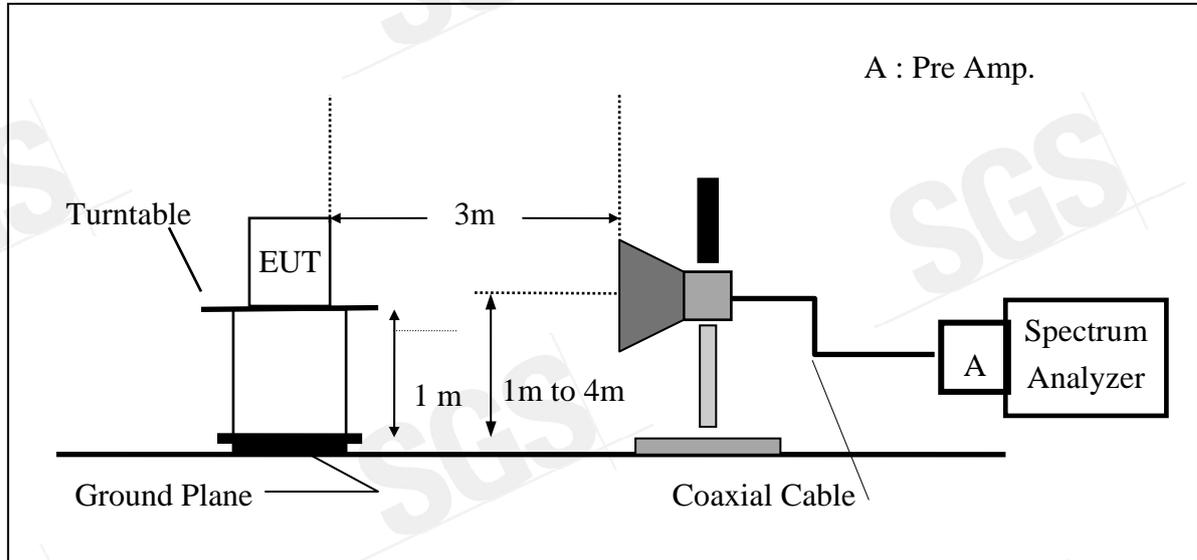

(C) Substituted Method Test Set-UP

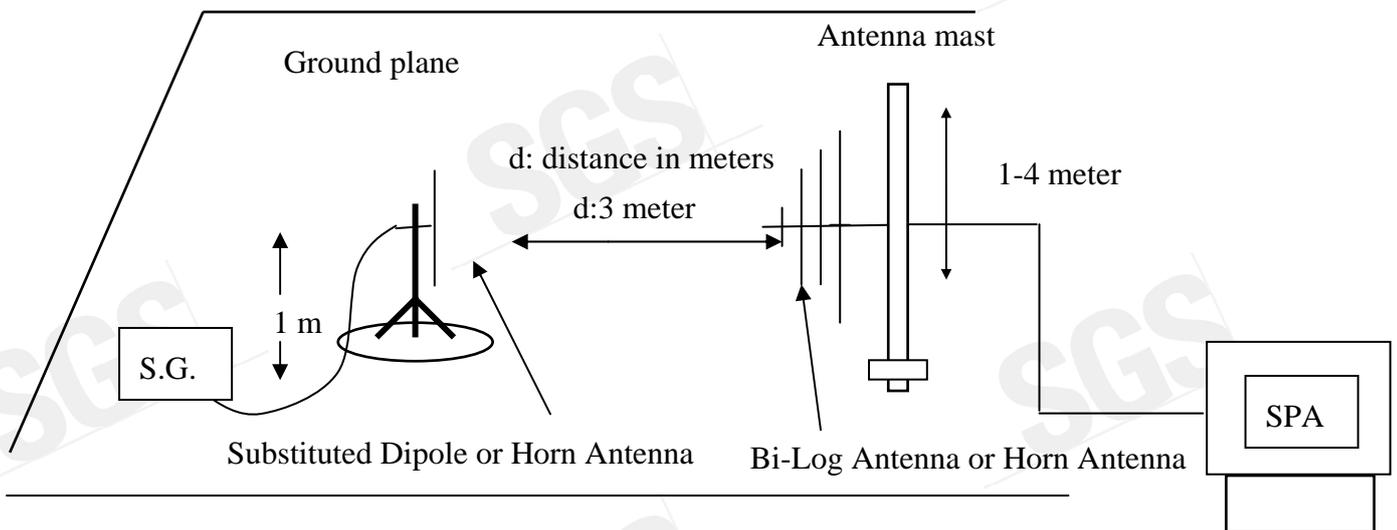

9.3 Measurement Procedure

The EUT was placed on a non-conductive, The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission were identified, the power of the emission was determined using the substitution method.

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

$$\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable Loss (dB)}$$

$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable Loss (dB)}$$

9.4 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008
Spectrum Analyzer	Agilent	E7405A	US41160416	08/27/2007	08/26/2008
Bilog Antenna	SCHWAZBECK	VULB9163	152	06/03/2007	06/02/2008
Horn antenna	Schwarzbeck	BBHA 9120D	309/320	08/16/2007	08/15/2008
Pre-Amplifier	HP	8447D	2944A09469	07/19/2007	07/18/2008
Pre-Amplifier	HP	8494B	3008A00578	02/26/2007	02/25/2008
Signal Generator	R&S	SMR40	100210	02/09/2007	02/10/2008
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	10/09/2007	10/08/2008
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	10/09/2007	10/08/2008
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-0.5M	0.5m	10/09/2007	10/08/2008
Site NSA	SGS	966 chamber	N/A	11/17/2006	11/16/2007
Site NSA	SGS	10m Open-Site	N/A	10/02/2007	10/01/2008
Attenuator	Mini-Circuit	BW-S10W5	N/A	10/07/2007	10/06/2008
Temperature Chamber	TERCHY	MHG-120LF	911009	10/14/2006	10/13/2007
Dipole Antenna	Schwarzbeck	VHAP	908/909	06/10/2007	06/11/2008
Dipole Antenna	Schwarzbeck	UHAP	891/892	06/10/2007	06/11/2008
Horn antenna	Schwarzbeck	BBHA 9120D	N/A	08/16/2007	08/15/2008

9.5 Measurement Result

Refer to attach tabular data sheets.

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode	: TX CH Low H Mode	Test Date:	Sep. 15, 2007
Fundamental Frequency	: 824.20 MHz	Test By:	Sky
Temperature	: 25°C	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
53.28	51.75	V	-56.66	-0.55	0.92	-58.13	-13.00	-45.13
92.08	51.35	V	-52.90	-7.75	1.17	-61.83	-13.00	-48.83
824.00	78.71	V	-8.62	-7.87	3.64	-20.14	-13.00	-7.14
1648.40	46.64	V	-60.40	9.29	5.06	-56.17	-13.00	-43.17
2472.60	48.62	V	-55.44	10.08	6.30	-51.67	-13.00	-38.67
3296.80	60.58	V	-42.00	12.17	7.26	-37.09	-13.00	-24.09
4121.00	---	V		12.61	8.33		-13.00	
4945.20	55.07	V	-41.50	12.65	9.19	-38.04	-13.00	-25.04
5769.40	48.18	V	-46.41	13.55	9.80	-42.66	-13.00	-29.66
6593.60	---	V		12.05	10.61		-13.00	
7417.80	---	V		11.49	11.28		-13.00	
8242.00	---	V		11.48	12.26		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode	: TX CH Low H Mode	Test Date:	Sep. 15, 2007
Fundamental Frequency	: 824.20 MHz	Test By:	Sky
Temperature	: 25°C	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
53.28	50.34	H	-58.10	-0.55	0.92	-59.57	-13.00	-46.57
232.73	46.75	H	-54.46	-7.87	1.84	-64.17	-13.00	-51.17
431.58	35.64	H	-60.11	-7.69	2.51	-70.30	-13.00	-57.30
824.00	81.03	H	-6.63	-7.87	3.64	-18.15	-13.00	-5.15
1648.40	41.23	H	-65.78	9.29	5.06	-61.55	-13.00	-48.55
2472.60	51.08	H	-52.98	10.08	6.30	-49.20	-13.00	-36.20
3296.80	47.70	H	-54.66	12.17	7.26	-49.75	-13.00	-36.75
4121.00	---	H		12.61	8.33		-13.00	
4945.20	---	H		12.65	9.19		-13.00	
5769.40	---	H		13.55	9.80		-13.00	
6593.60	---	H		12.05	10.61		-13.00	
7417.80	---	H		11.49	11.28		-13.00	
8242.00	---	H		11.48	12.26		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz - 1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + \text{Antenna Gain} (dB/dBi) - \text{Cable loss} (dB)$

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH Mid H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 836.60 MHz

Test By: Sky

Temperature : 25°C

Pol: Ver

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
53.28	48.23	V	-60.18	-0.55	0.92	-61.65	-13.00	-48.65
128.94	43.54	V	-56.64	-7.78	1.36	-65.78	-13.00	-52.78
1673.20	43.43	V	-63.60	9.36	5.10	-59.34	-13.00	-46.34
2509.80	---	V		10.09	6.35		-13.00	
3346.40	59.97	V	-42.59	12.28	7.29	-37.61	-13.00	-24.61
4183.00	59.26	V	-40.30	12.62	8.40	-36.08	-13.00	-23.08
5019.60	51.41	V	-44.89	12.67	9.26	-41.48	-13.00	-28.48
5856.20	45.87	V	-48.48	13.68	9.85	-44.64	-13.00	-31.64
6692.80	---	V		11.95	10.74		-13.00	
7529.40	---	V		11.45	11.35		-13.00	
8366.00	---	V		11.59	12.43		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH Mid H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 836.60 MHz

Test By: Sky

Temperature : 25°C

Pol: Hor

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
53.28	48.91	H	-59.53	-0.55	0.92	-61.00	-13.00	-48.00
232.73	47.64	H	-53.57	-7.87	1.84	-63.28	-13.00	-50.28
1673.20	46.00	H	-61.00	9.36	5.10	-56.73	-13.00	-43.73
2509.80	50.04	H	-53.83	10.09	6.35	-50.09	-13.00	-37.09
3346.40	49.43	H	-52.89	12.28	7.29	-47.91	-13.00	-34.91
4183.00	49.10	H	-50.32	12.62	8.40	-46.09	-13.00	-33.09
5019.60	38.25	H	-58.00	12.67	9.26	-54.59	-13.00	-41.59
5856.20	---	H		13.68	9.85		-13.00	
6692.80	---	H		11.95	10.74		-13.00	
7529.40	---	H		11.45	11.35		-13.00	
8366.00	---	H		11.59	12.43		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH High H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 848.80 MHz

Test By: Sky

Temperature : 25°C

Pol: Ver

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
53.28	47.00	V	-61.41	-0.55	0.92	-62.88	-13.00	-49.88
167.74	45.47	V	-53.73	-7.81	1.50	-63.05	-13.00	-50.05
849.00	77.59	V	-9.14	-7.88	3.75	-20.77	-13.00	-7.77
1697.60	44.38	V	-62.64	9.44	5.14	-58.35	-13.00	-45.35
2546.40	48.81	V	-54.98	10.20	6.40	-51.18	-13.00	-38.18
3395.20	55.64	V	-46.90	12.38	7.33	-41.85	-13.00	-28.85
4244.00	56.94	V	-42.41	12.63	8.46	-38.24	-13.00	-25.24
5092.80	47.55	V	-48.61	12.74	9.32	-45.18	-13.00	-32.18
5941.60	---	V		13.81	9.89		-13.00	
6790.40	---	V		11.86	10.87		-13.00	
7639.20	---	V		11.40	11.48		-13.00	
8488.00	---	V		11.70	12.59		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz - 1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH High H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 848.80 MHz

Test By: Sky

Temperature : 25°C

Pol: Hor

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
53.28	49.37	H	-59.07	-0.55	0.92	-60.54	-13.00	-47.54
232.73	45.68	H	-55.53	-7.87	1.84	-65.24	-13.00	-52.24
366.59	41.38	H	-55.51	-7.65	2.46	-65.62	-13.00	-52.62
849.02	80.16	H	-6.86	-7.88	3.75	-18.48	-13.00	-5.48
1697.60	46.86	H	-60.12	9.44	5.14	-55.83	-13.00	-42.83
2546.40	44.16	H	-59.62	10.20	6.40	-55.82	-13.00	-42.82
3395.20	48.38	H	-53.90	12.38	7.33	-48.85	-13.00	-35.85
4244.00	45.91	H	-53.28	12.63	8.46	-49.11	-13.00	-36.11
5092.80	---	H		12.74	9.32		-13.00	
5941.60	---	H		13.81	9.89		-13.00	
6790.40	---	H		11.86	10.87		-13.00	
7639.20	---	H		11.40	11.48		-13.00	
8488.00	---	H		11.70	12.59		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz - 1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Low H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 1850.20MHz

Test By: Sky

Temperature : 25°C

Pol: Ver

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
36.79	52.91	V	-49.82	-4.16	0.75	-54.73	-13.00	-41.73
130.88	43.06	V	-56.88	-7.78	1.37	-66.04	-13.00	-53.04
1850.00	80.78	V	-26.18	9.90	5.41	-21.69	-13.00	-8.69
3691.00	---	V		12.61	7.71		-13.00	
3700.40	62.91	V	-38.67	12.61	7.73	-33.79	-13.00	-20.79
5550.60	60.26	V	-34.95	13.23	9.68	-31.41	-13.00	-18.41
7400.80	57.47	V	-28.53	11.50	11.28	-28.30	-13.00	-15.30
9251.00	61.80	V	-21.03	11.92	13.10	-22.21	-13.00	-9.21
11101.20	---	V		11.66	14.33		-13.00	
12951.40	---	V		13.63	15.98		-13.00	
14801.60	---	V		12.76	17.27		-13.00	
16651.80	---	V		15.92	19.04		-13.00	
18502.00	---	V		18.75	21.21		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz - 1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Low H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 1850.20MHz

Test By: Sky

Temperature : 25°C

Pol: Hor

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
30.00	46.40	H	-59.50	-7.34	0.69	-67.53	-13.00	-54.53
298.69	43.56	H	-56.08	-7.92	1.99	-65.99	-13.00	-52.99
623.64	33.41	H	-57.61	-7.80	2.97	-68.38	-13.00	-55.38
1850.00	81.94	H	-24.95	9.90	5.41	-20.46	-13.00	-7.46
3691.00	---	H		12.61	7.71		-13.00	
3700.40	62.33	H	-39.03	12.61	7.73	-34.15	-13.00	-21.15
5550.60	54.30	H	-40.83	13.23	9.68	-37.28	-13.00	-24.28
7400.80	53.85	H	-32.21	11.50	11.28	-31.99	-13.00	-18.99
9251.00	54.63	H	-28.01	11.92	13.10	-29.19	-13.00	-16.19
11101.20	---	H		11.66	14.33		-13.00	
12951.40	---	H		13.63	15.98		-13.00	
14801.60	---	H		12.76	17.27		-13.00	
16651.80	---	H		15.92	19.04		-13.00	
18502.00	---	H		18.75	21.21		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Mid H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 1880MHz

Test By: Sky

Temperature : 25°C

Pol: Ver

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
37.79	52.92	V	-49.52	-3.69	0.76	-53.97	-13.00	-40.97
232.73	41.85	V	-59.33	-7.87	1.84	-69.05	-13.00	-56.05
300.63	42.61	V	-56.95	-7.92	1.99	-66.86	-13.00	-53.86
623.64	35.37	V	-55.09	-7.80	2.97	-65.86	-13.00	-52.86
3760.00	62.71	V	-38.59	12.60	7.82	-33.81	-13.00	-20.81
5640.00	62.23	V	-32.73	13.36	9.73	-29.10	-13.00	-16.10
7520.00	59.59	V	-26.02	11.45	11.33	-25.91	-13.00	-12.91
9400.00	56.33	V	-26.19	11.93	13.15	-27.41	-13.00	-14.41
11280.00	---	V		11.92	14.56		-13.00	
13160.00	---	V		13.33	16.11		-13.00	
15040.00	---	V		13.76	17.57		-13.00	
16920.00	---	V		15.27	19.66		-13.00	
18800.00	---	V		18.68	21.34		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Mid H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 1880MHz

Test By: Sky

Temperature : 25°C

Pol: Hor

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
36.79	46.31	H	-57.49	-4.16	0.75	-62.39	-13.00	-49.39
128.94	47.15	H	-53.38	-7.78	1.36	-62.52	-13.00	-49.52
232.73	41.75	H	-59.46	-7.87	1.84	-69.17	-13.00	-56.17
300.63	43.10	H	-56.48	-7.92	1.99	-66.39	-13.00	-53.39
3760.00	64.08	H	-37.03	12.60	7.82	-32.24	-13.00	-19.24
5640.00	53.54	H	-41.35	13.36	9.73	-37.72	-13.00	-24.72
7520.00	52.36	H	-33.33	11.45	11.33	-33.21	-13.00	-20.21
9400.00	55.72	H	-26.54	11.93	13.15	-27.77	-13.00	-14.77
11280.00	---	H		11.92	14.56		-13.00	
13160.00	---	H		13.33	16.11		-13.00	
15040.00	---	H		13.76	17.57		-13.00	
16920.00	---	H		15.27	19.66		-13.00	
18800.00	---	H		18.68	21.34		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH High H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 1909.8 MHz

Test By: Sky

Temperature : 25°C

Pol: Ver

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
36.79	52.32	V	-50.41	-4.16	0.75	-55.32	-13.00	-42.32
298.69	42.53	V	-57.08	-7.92	1.99	-66.98	-13.00	-53.98
1910.02	78.89	V	-28.05	10.08	5.51	-23.48	-13.00	-10.48
3812.20	65.89	V	-35.17	12.60	7.90	-30.47	-13.00	-17.47
3981.60	---	V		12.60	8.17		-13.00	
5729.40	61.65	V	-33.08	13.48	9.77	-29.37	-13.00	-16.37
7639.20	59.27	V	-25.90	11.40	11.48	-25.97	-13.00	-12.97
9954.00	---	V		12.08	13.43		-13.00	
11944.80	---	V		13.08	15.21		-13.00	
13935.60	---	V		11.82	16.86		-13.00	
15926.40	---	V		17.08	18.33		-13.00	
17917.20	---	V		9.63	20.12		-13.00	
19908.00	---	V		18.88	20.85		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz - 1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH High H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 1909.8 MHz

Test By: Sky

Temperature : 25°C

Pol: Hor

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
130.88	49.78	H	-50.57	-7.78	1.37	-59.72	-13.00	-46.72
232.73	42.68	H	-58.53	-7.87	1.84	-68.24	-13.00	-55.24
298.69	42.46	H	-57.18	-7.92	1.99	-67.09	-13.00	-54.09
1910.00	81.70	H	-25.15	10.08	5.51	-20.59	-13.00	-7.59
3812.20	66.04	H	-34.85	12.60	7.90	-30.15	-13.00	-17.15
3981.60	---	H		12.60	8.17		-13.00	
5729.40	48.93	H	-45.75	13.48	9.77	-42.04	-13.00	-29.04
7639.20	56.56	H	-28.73	11.40	11.48	-28.81	-13.00	-15.81
9954.00	---	H		12.08	13.43		-13.00	
11944.80	---	H		13.08	15.21		-13.00	
13935.60	---	H		11.82	16.86		-13.00	
15926.40	---	H		17.08	18.33		-13.00	
17917.20	---	H		9.63	20.12		-13.00	
19908.00	---	H		18.88	20.85		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz - 1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$

Radiated Spurious Emission Measurement Result: WCDMA Band II Mode

Operation Mode : TX CH Low H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 1852.40MHz

Test By: Sky

Temperature : 25°C

Pol: Ver

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
101.78	46.19	V	-57.29	-7.76	1.23	-66.28	-13.00	-53.28
198.78	41.02	V	-60.97	-7.84	1.56	-70.37	-13.00	-57.37
232.73	39.92	V	-61.26	-7.87	1.84	-70.98	-13.00	-57.98
455.83	34.33	V	-60.29	-7.70	2.58	-70.57	-13.00	-57.57
623.64	34.53	V	-55.93	-7.80	2.97	-66.70	-13.00	-53.70
1850.00	58.05	V	-48.91	9.90	5.41	-44.42	-13.00	-31.42
3704.80	---	V		12.61	7.73		-13.00	
5557.20	---	V		13.24	9.69		-13.00	
7409.60	---	V		11.49	11.28		-13.00	
9262.00	---	V		11.92	13.10		-13.00	
11114.40	---	V		11.68	14.35		-13.00	
12966.80	---	V		13.62	16.00		-13.00	
14819.20	---	V		12.83	17.30		-13.00	
16671.60	---	V		15.87	19.09		-13.00	
18524.00	---	V		18.74	21.22		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$

Radiated Spurious Emission Measurement Result: WCDMA Band II Mode

Operation Mode : TX CH Low H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 1852.40MHz

Test By: Sky

Temperature : 25°C

Pol: Hor

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
128.94	43.89	H	-56.64	-7.78	1.36	-65.78	-13.00	-52.78
240.49	43.00	H	-58.07	-7.88	1.91	-67.86	-13.00	-54.86
298.69	44.15	H	-55.49	-7.92	1.99	-65.40	-13.00	-52.40
366.59	40.43	H	-56.46	-7.65	2.46	-66.57	-13.00	-53.57
407.33	39.12	H	-57.08	-7.67	2.43	-67.18	-13.00	-54.18
1850.00	58.79	H	-48.10	9.90	5.41	-43.61	-13.00	-30.61
3704.80	43.14	H	-58.20	12.61	7.73	-53.33	-13.00	-40.33
5557.20	---	H		13.24	9.69		-13.00	
7409.60	---	H		11.49	11.28		-13.00	
9262.00	---	H		11.92	13.10		-13.00	
11114.40	---	H		11.68	14.35		-13.00	
12966.80	---	H		13.62	16.00		-13.00	
14819.20	---	H		12.83	17.30		-13.00	
16671.60	---	H		15.87	19.09		-13.00	
18524.00	---	H		18.74	21.22		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$

Radiated Spurious Emission Measurement Result: WCDMA Band II Mode

Operation Mode : TX CH Mid H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 1880MHz

Test By: Sky

Temperature : 25°C

Pol: Ver

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
167.74	41.61	V	-57.59	-7.81	1.50	-66.91	-13.00	-53.91
198.78	41.54	V	-60.45	-7.84	1.56	-69.85	-13.00	-56.85
300.63	43.22	V	-56.34	-7.92	1.99	-66.25	-13.00	-53.25
720.64	33.79	V	-55.48	-7.86	3.37	-66.72	-13.00	-53.72
1877.50	---	V		9.98	5.45		-13.00	
3760.00	---	V		12.60	7.82		-13.00	
5640.00	---	V		13.36	9.73		-13.00	
7520.00	---	V		11.45	11.33		-13.00	
9400.00	---	V		11.93	13.15		-13.00	
11280.00	---	V		11.92	14.56		-13.00	
13160.00	---	V		13.33	16.11		-13.00	
15040.00	---	V		13.76	17.57		-13.00	
16920.00	---	V		15.27	19.66		-13.00	
18800.00	---	V		18.68	21.34		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$

Radiated Spurious Emission Measurement Result: WCDMA Band II Mode

Operation Mode : TX CH Mid H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 1880MHz

Test By: Sky

Temperature : 25°C

Pol: Hor

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
128.94	44.63	H	-55.90	-7.78	1.36	-65.04	-13.00	-52.04
300.63	47.21	H	-52.37	-7.92	1.99	-62.28	-13.00	-49.28
366.59	46.26	H	-50.63	-7.65	2.46	-60.74	-13.00	-47.74
407.33	38.61	H	-57.59	-7.67	2.43	-67.69	-13.00	-54.69
1877.50	---	H		9.98	5.45		-13.00	
3760.00	39.84	H	-61.27	12.60	7.82	-56.48	-13.00	-43.48
5640.00	36.46	H	-58.43	13.36	9.73	-54.80	-13.00	-41.80
7520.00	---	H		11.45	11.33		-13.00	
9400.00	---	H		11.93	13.15		-13.00	
11280.00	---	H		11.92	14.56		-13.00	
13160.00	---	H		13.33	16.11		-13.00	
15040.00	---	H		13.76	17.57		-13.00	
16920.00	---	H		15.27	19.66		-13.00	
18800.00	---	H		18.68	21.34		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$

Radiated Spurious Emission Measurement Result: WCDMA Band II Mode

Operation Mode : TX CH High H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 1907.6 MHz

Test By: Sky

Temperature : 25°C

Pol: Ver

Humidity : 65%

Freq. (MHz)	SPA Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
198.78	41.87	V	-60.12	-7.84	1.56	-69.52	-13.00	-56.52
232.73	40.42	V	-60.76	-7.87	1.84	-70.48	-13.00	-57.48
300.63	40.83	V	-58.73	-7.92	1.99	-68.64	-13.00	-55.64
363.68	37.87	V	-59.56	-7.65	2.46	-69.66	-13.00	-56.66
720.64	34.12	V	-55.15	-7.86	3.37	-66.39	-13.00	-53.39
1910.00	62.06	V	-44.88	10.08	5.51	-40.31	-13.00	-27.31
3815.20	38.77	V	-62.28	12.60	7.91	-57.59	-13.00	-44.59
5722.80	---	V		13.48	9.78		-13.00	
7630.40	---	V		11.41	11.47		-13.00	
9538.00	---	V		11.95	13.21		-13.00	
11445.60	---	V		12.15	14.77		-13.00	
13353.20	---	V		13.00	16.21		-13.00	
15260.80	---	V		14.91	17.86		-13.00	
17168.40	---	V		14.53	19.76		-13.00	
19076.00	---	V		18.65	21.37		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz - 1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$

Radiated Spurious Emission Measurement Result: WCDMA Band II Mode

Operation Mode : TX CH High H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 1907.6 MHz

Test By: Sky

Temperature : 25°C

Pol: Hor

Humidity : 65%

Freq. (MHz)	SPA Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
128.94	44.12	H	-56.41	-7.78	1.36	-65.55	-13.00	-52.55
203.63	47.81	H	-53.92	-7.84	1.59	-63.36	-13.00	-50.36
298.69	45.59	H	-54.05	-7.92	1.99	-63.96	-13.00	-50.96
366.59	40.09	H	-56.80	-7.65	2.46	-66.91	-13.00	-53.91
407.33	38.87	H	-57.33	-7.67	2.43	-67.43	-13.00	-54.43
1910.00	63.76	H	-43.09	10.08	5.51	-38.53	-13.00	-25.53
3815.20	43.86	H	-57.02	12.60	7.91	-52.32	-13.00	-39.32
5722.80	---	H		13.48	9.78		-13.00	
7630.40	---	H		11.41	11.47		-13.00	
9538.00	---	H		11.95	13.21		-13.00	
11445.60	---	H		12.15	14.77		-13.00	
13353.20	---	H		13.00	16.21		-13.00	
15260.80	---	H		14.91	17.86		-13.00	
17168.40	---	H		14.53	19.76		-13.00	
19076.00	---	H		18.65	21.37		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz - 1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$

Radiated Spurious Emission Measurement Result: WCDMA Band V Mode

Operation Mode : TX CH Low H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 826.4MHz

Test By: Sky

Temperature : 25°C

Pol: Ver

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
101.78	46.11	V	-57.37	-7.76	1.23	-66.36	-13.00	-53.36
128.94	42.81	V	-57.37	-7.78	1.36	-66.51	-13.00	-53.51
232.73	46.89	V	-54.29	-7.87	1.84	-64.01	-13.00	-51.01
300.63	43.89	V	-55.67	-7.92	1.99	-65.58	-13.00	-52.58
528.58	36.28	V	-57.44	-7.74	2.74	-67.92	-13.00	-54.92
825.00	59.77	V	-27.54	-7.88	3.65	-39.06	-13.00	-26.06
1652.80	---	V		9.30	5.06		-13.00	
2479.20	---	V		10.07	6.31		-13.00	
3305.60	---	V		12.19	7.26		-13.00	
4132.00	---	V		12.62	8.34		-13.00	
4958.40	---	V		12.65	9.20		-13.00	
5784.80	---	V		13.58	9.81		-13.00	
6611.20	---	V		12.03	10.63		-13.00	
7437.60	---	V		11.48	11.29		-13.00	
8264.00	---	V		11.50	12.29		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$

Radiated Spurious Emission Measurement Result: WCDMA Band V Mode

Operation Mode : TX CH Low H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 826.4MHz

Test By: Sky

Temperature : 25°C

Pol: Hor

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
65.89	43.38	H	-68.47	-0.83	0.98	-70.28	-13.00	-57.28
92.08	44.45	H	-59.15	-7.75	1.17	-68.07	-13.00	-55.07
130.88	46.17	H	-54.18	-7.78	1.37	-63.33	-13.00	-50.33
232.73	44.40	H	-56.81	-7.87	1.84	-66.52	-13.00	-53.52
300.63	43.24	H	-56.34	-7.92	1.99	-66.25	-13.00	-53.25
825.00	60.30	H	-27.34	-7.88	3.65	-38.86	-13.00	-25.86
1652.80	---	H		9.30	5.06		-13.00	
2479.20	---	H		10.07	6.31		-13.00	
3305.60	---	H		12.19	7.26		-13.00	
4132.00	---	H		12.62	8.34		-13.00	
4958.40	---	H		12.65	9.20		-13.00	
5784.80	---	H		13.58	9.81		-13.00	
6611.20	---	H		12.03	10.63		-13.00	
7437.60	---	H		11.48	11.29		-13.00	
8264.00	---	H		11.50	12.29		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$

Radiated Spurious Emission Measurement Result: WCDMA Band V Mode

Operation Mode : TX CH Mid H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 836.0MHz

Test By: Sky

Temperature : 25°C

Pol: Ver

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
101.78	46.29	V	-57.19	-7.76	1.23	-66.18	-13.00	-53.18
130.88	45.04	V	-54.90	-7.78	1.37	-64.06	-13.00	-51.06
232.73	44.96	V	-56.22	-7.87	1.84	-65.94	-13.00	-52.94
298.69	43.97	V	-55.64	-7.92	1.99	-65.54	-13.00	-52.54
623.64	35.41	V	-55.05	-7.80	2.97	-65.82	-13.00	-52.82
1672.00	---	V		9.36	5.10		-13.00	
2508.00	---	V		10.08	6.35		-13.00	
3344.00	---	V		12.27	7.29		-13.00	
4180.00	---	V		12.62	8.39		-13.00	
5016.00	---	V		12.67	9.25		-13.00	
5852.00	---	V		13.68	9.84		-13.00	
6688.00	---	V		11.96	10.73		-13.00	
7524.00	---	V		11.45	11.34		-13.00	
8360.00	---	V		11.58	12.42		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$

Radiated Spurious Emission Measurement Result: WCDMA Band V Mode

Operation Mode : TX CH Mid H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 836.0MHz

Test By: Sky

Temperature : 25°C

Pol: Hor

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
36.79	44.42	H	-59.38	-4.16	0.75	-64.28	-13.00	-51.28
128.94	48.28	H	-52.25	-7.78	1.36	-61.39	-13.00	-48.39
232.73	45.03	H	-56.18	-7.87	1.84	-65.89	-13.00	-52.89
300.63	41.83	H	-57.75	-7.92	1.99	-67.66	-13.00	-54.66
623.64	34.46	H	-56.56	-7.80	2.97	-67.33	-13.00	-54.33
1672.00	---	H		9.36	5.10		-13.00	
2508.00	---	H		10.08	6.35		-13.00	
3344.00	---	H		12.27	7.29		-13.00	
4180.00	---	H		12.62	8.39		-13.00	
5016.00	---	H		12.67	9.25		-13.00	
5852.00	---	H		13.68	9.84		-13.00	
6688.00	---	H		11.96	10.73		-13.00	
7524.00	---	H		11.45	11.34		-13.00	
8360.00	---	H		11.58	12.42		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + \text{Antenna Gain} (dB/dBi) - \text{Cable loss} (dB)$

Radiated Spurious Emission Measurement Result: WCDMA Band V Mode

Operation Mode : TX CH High H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 846.6 MHz

Test By: Sky

Temperature : 25°C

Pol: Ver

Humidity : 65%

Freq. (MHz)	SPA Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
101.78	46.32	V	-57.16	-7.76	1.23	-66.15	-13.00	-53.15
232.73	45.83	V	-55.35	-7.87	1.84	-65.07	-13.00	-52.07
298.69	43.79	V	-55.82	-7.92	1.99	-65.72	-13.00	-52.72
366.59	40.11	V	-57.21	-7.65	2.46	-67.31	-13.00	-54.31
623.64	35.58	V	-54.88	-7.80	2.97	-65.65	-13.00	-52.65
850.00	58.46	V	-28.25	-7.88	3.75	-39.88	-13.00	-26.88
1693.20	---	V		9.42	5.13		-13.00	
2539.80	---	V		10.18	6.39		-13.00	
3386.40	---	V		12.36	7.32		-13.00	
4233.00	---	V		12.63	8.45		-13.00	
5079.60	---	V		12.73	9.31		-13.00	
5926.20	---	V		13.79	9.88		-13.00	
6772.80	---	V		11.87	10.84		-13.00	
7619.40	---	V		11.41	11.46		-13.00	
8466.00	---	V		11.68	12.56		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$

Radiated Spurious Emission Measurement Result: WCDMA Band V Mode

Operation Mode : TX CH High H Mode

Test Date: Sep. 15, 2007

Fundamental Frequency : 846.60 MHz

Test By: Sky

Temperature : 25°C

Pol: Hor

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
65.89	44.14	H	-67.71	-0.83	0.98	-69.52	-13.00	-56.52
128.94	48.35	H	-52.18	-7.78	1.36	-61.32	-13.00	-48.32
232.73	44.62	H	-56.59	-7.87	1.84	-66.30	-13.00	-53.30
298.69	40.33	H	-59.31	-7.92	1.99	-69.22	-13.00	-56.22
623.64	34.23	H	-56.79	-7.80	2.97	-67.56	-13.00	-54.56
850.00	61.99	H	-25.00	-7.88	3.75	-36.63	-13.00	-23.63
1693.20	---	H		9.42	5.13		-13.00	
2539.80	---	H		10.18	6.39		-13.00	
3386.40	---	H		12.36	7.32		-13.00	
4233.00	---	H		12.63	8.45		-13.00	
5079.60	---	H		12.73	9.31		-13.00	
5926.20	---	H		13.79	9.88		-13.00	
6772.80	---	H		11.87	10.84		-13.00	
7619.40	---	H		11.41	11.46		-13.00	
8466.00	---	H		11.68	12.56		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dB/dBi) - Cable \text{ loss} (dB)$


10. FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT

10.1 Standard Applicable

According to FCC §2.1055(a)(1)(b).

Frequency Tolerance: 2.5 ppm

10.2 Test Set-up:

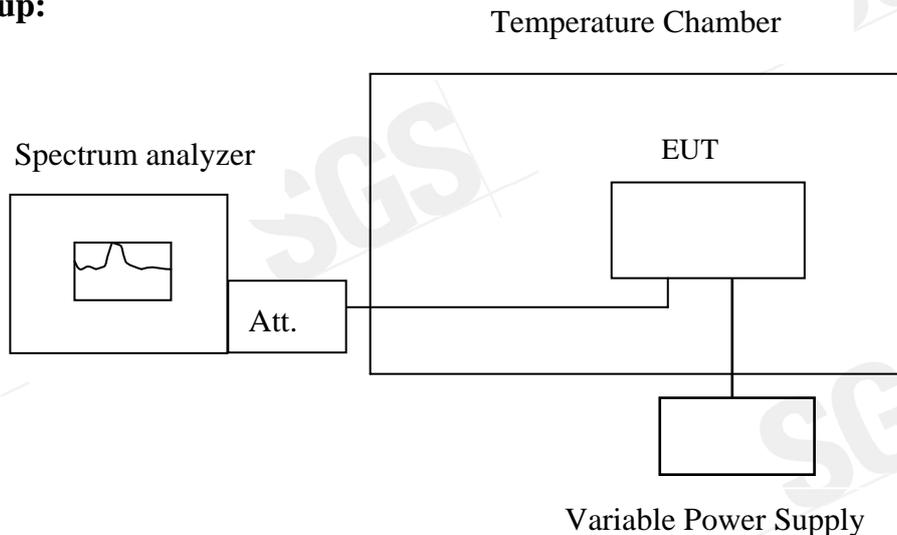

Note : Measurement setup for testing on Antenna connector

10.3 Measurement Procedure

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

10.4 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2007	06/29/2008
Power Sensor	Anritsu	MA2490A	31431	06/28/2007	06/29/2008
Power Meter	Anritsu	ML2487A	6K00002070	06/28/2007	06/29/2008
Temperature Chamber	TERCHY	MHG-120LF	911009	11/11/2006	11/12/2007
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circuit	BW-S10W5	N/A	10/07/2007	10/06/2008
Attenuator	Mini-Circuit	BW-S6W5	N/A	10/07/2007	10/06/2008
Splitter	Mini-Circuit	ZFSC-2-10G	N/A	10/07/2007	10/06/2008
Signal Generator	R&S	SMR40	100210	11/09/2006	11/10/2007
DC Power Supply	Agilent	6038A	2929A-07548	01/06/2007	01/05/2008

10.5 Measurement Result

Reference Frequency: GSM850 Mid Channel 836.6 MHz @ 25°C				
Limit: +/- 2.5 ppm = 2091 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (°C)	(MHz)		
5	-30	836.60003	-35.00	2091
5	-20	836.600027	-32.00	2091
5	-10	836.600019	-24.00	2091
5	0	836.600013	-18.00	2091
5	10	836.600008	-13.00	2091
5	20	836.599995	0.00	2091
5	30	836.59999	5.00	2091
5	40	836.599988	7.00	2091
5	50	836.599987	8.00	2091

Reference Frequency: PCS1900 Mid Channel 1880 MHz @ 25°C				
Limit: +/- 2.5 ppm = 4700 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (°C)	(MHz)		
5	-30	1880.000029	-21.00	4700
5	-20	1880.000022	-14.00	4700
5	-10	1880.000019	-11.00	4700
5	0	1880.000015	-7.00	4700
5	10	1880.000011	-3.00	4700
5	20	1880.000008	0.00	4700
5	30	1880.000000	8.00	4700
5	40	1879.999994	14.00	4700
5	50	1879.999989	19.00	4700

Reference Frequency: WCDMA Band II Mid Channel 1880 MHz @ 25°C				
Limit: +/- 2.5 ppm = 4700 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (°C)	(MHz)		
5	-30	1880.000021	-20.00	4700
5	-20	1880.000018	-17.00	4700
5	-10	1880.000012	-11.00	4700
5	0	1880.000008	-7.00	4700
5	10	1880.000005	-4.00	4700
5	20	1880.000001	0.00	4700
5	30	1879.999997	4.00	4700
5	40	1879.999993	8.00	4700
5	50	1879.999990	11.00	4700

Reference Frequency: WCDMA Band V Channel 836 MHz @ 25°C				
Limit: +/- 2.5 ppm = 2100 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (°C)	(MHz)		
5	-30	836.600020	-18.00	2091
5	-20	836.600018	-16.00	2091
5	-10	836.600012	-10.00	2091
5	0	836.600009	-7.00	2091
5	10	836.600005	-3.00	2091
5	20	836.600002	0.00	2091
5	30	836.599996	6.00	2091
5	40	836.599990	12.00	2091
5	50	836.599988	14.00	2091


11. FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT

11.1 Standard Applicable

According to FCC §2.1055(d)(1)(2)

Frequency Tolerance: 2.5 ppm

11.2 Test Set-up:

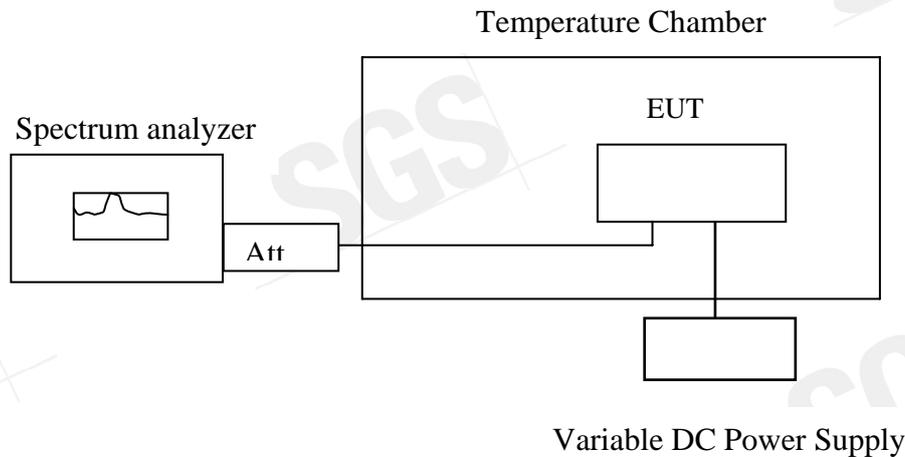

Note: Measurement setup for testing on Antenna connector

11.3 Measurement Procedure

Set chamber temperature to 25°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.

11.4 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2007	06/29/2008
Power Sensor	Anritsu	MA2490A	31431	06/28/2007	06/29/2008
Power Meter	Anritsu	ML2487A	6K00002070	06/28/2007	06/29/2008
Temperature Chamber	TERCHY	MHG-120LF	911009	11/11/2006	11/12/2007
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circuit	BW-S10W5	N/A	10/07/2007	10/06/2008
Attenuator	Mini-Circuit	BW-S6W5	N/A	10/07/2007	10/06/2008
Splitter	Mini-Circuit	ZFSC-2-10G	N/A	10/07/2007	10/06/2008
Signal Generator	R&S	SMR40	100210	11/09/2006	11/10/2007
DC Power Supply	Agilent	6038A	2929A-07548	01/06/2007	01/05/2008

11.5 Measurement Result

Reference Frequency: GSM850 Mid Channel 836.6 MHz @ 25°C				
Limit: +/- 2.5 ppm = 2091 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (°C)	(MHz)		
5.75	25.00	836.599997	0.00	2091.00
5.00	25.00	836.599995	2.00	2091.00
4.25	25.00	836.599990	7.00	2091.00
2.65 (End Point)	25.00	836.599988	9.00	2091.00

Reference Frequency: PCS1900 Mid Channel 1880 MHz @ 25°C				
Limit: +/- 2.5 ppm = 4700 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (°C)	(MHz)		
5.75	25	1880.00001	0.00	4700
5	25	1880.000008	2.00	4700
4.25	25	1880.000002	8.00	4700
2.65 (Endpoint)	25	1879.99999	16.00	4700

Note: The battery is rated 5V dc.

Reference Frequency: WCDMA Band II Channel 1880 MHz @ 25°C				
Limit: +/- 2.5 ppm = 4700 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (°C)	(MHz)		
5.75	25	1880.000007	0.00	4700
5	25	1880.000001	6.00	4700
4.25	25	1879.999990	17.00	4700
2.65 (Endpoint)	25	1879.999990	17.00	4700

Reference Frequency: WCDMA Band V Channel 836 MHz @ 25°C				
Limit: +/- 2.5 ppm = 2100 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (°C)	(MHz)		
5.75	25.00	836.600007	0.00	2091.00
5.00	25.00	836.600002	5.00	2091.00
4.25	25.00	836.599997	10.00	2091.00
2.65 (End Point)	25.00	836.599993	14.00	2091.00

Note: The battery is rated 5V dc.

12. AC POWER LINE CONDUCTED EMISSION TEST

12.1 Standard Applicable

According to §15.207. The emission value for frequency within 150KHz to 30MHz shall not exceed criteria of below chart.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note

- 1.The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2 EUT Setup

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2001.
2. The EUT was plug-in DC power adaptor and was placed on the center of the back edge on the test table. The peripherals like earphone was placed on the side of the EUT. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
3. The Power adaptor was connected with 110Vac/60Hz power source.

12.3 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

12.4 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMC Analyzer	HP	8594EM	3624A00203	09/02/2007	09/03/2008
EMI Test Receiver	R&S	ESCS30	828985/004	06/09/2007	06/10/2008
Transient Limiter	HP	11947A	3107A02062	09/02/2007	09/03/2008
LISN	Rolf-Heine	NNB-2/16Z	99012	12/31/2006	12/30/2007
LISN	Rolf-Heine	NNB-2/16Z	99013	12/24/2006	12/23/2007
Coaxial Cables	N/A	No. 3, 4	N/A	12/24/2006	12/23/2007

12.5 Measurement Result


The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	GSM 850 LINK			Test Date:	Sep. 19, 2007
Temperature:	25 °C	Humidity:	62 %	Test By:	Sky

Conducted Emission Measurement

上午 10:28:06
 80.0 dBuV

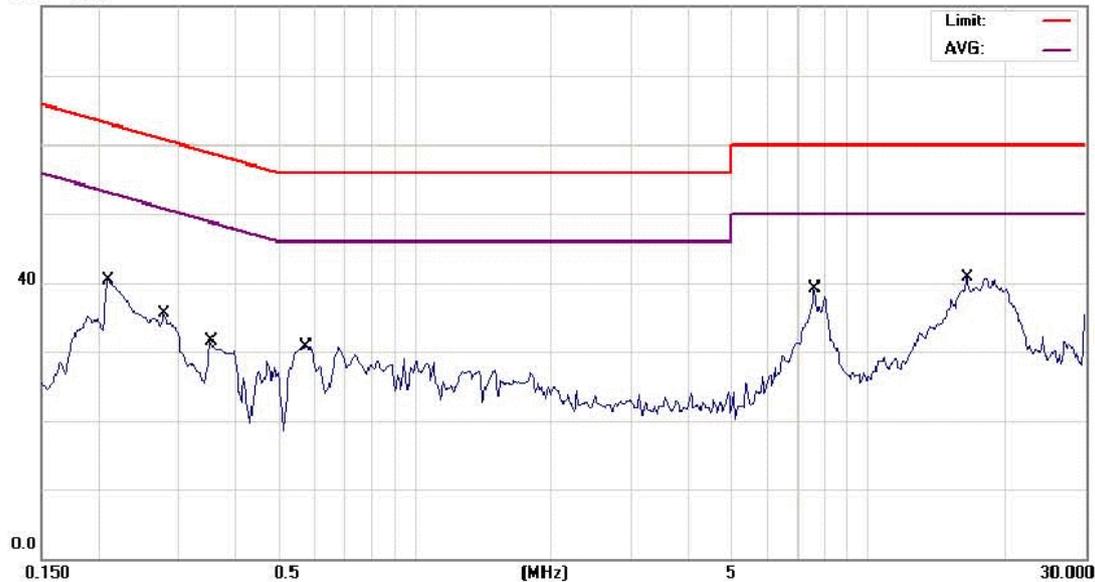

Site SGS CONDUCTED #1 Phase: **L1** Temperature: 25 °C
 Limit: CISPR22 Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 62 %
 EUT: HSDPA / WCDMA / GSM / GPRS USB Modem Distance: Air Pressure: hpa
 MN: MF622
 Note: GSM 850 LINK


No. Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.2100	39.84	0.53	40.37	63.21	-22.84	QP	
2	0.2800	34.89	0.56	35.45	60.82	-25.37	QP	
3	0.3550	30.82	0.60	31.42	58.84	-27.42	QP	
4	0.5750	29.94	0.68	30.62	56.00	-25.38	QP	
5	7.6400	37.99	1.08	39.07	60.00	-20.93	QP	
6 *	16.5600	39.58	1.20	40.78	60.00	-19.22	QP	

This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

Conducted Emission Measurement

Time: 上午 10:30:23

80.0 dBuV

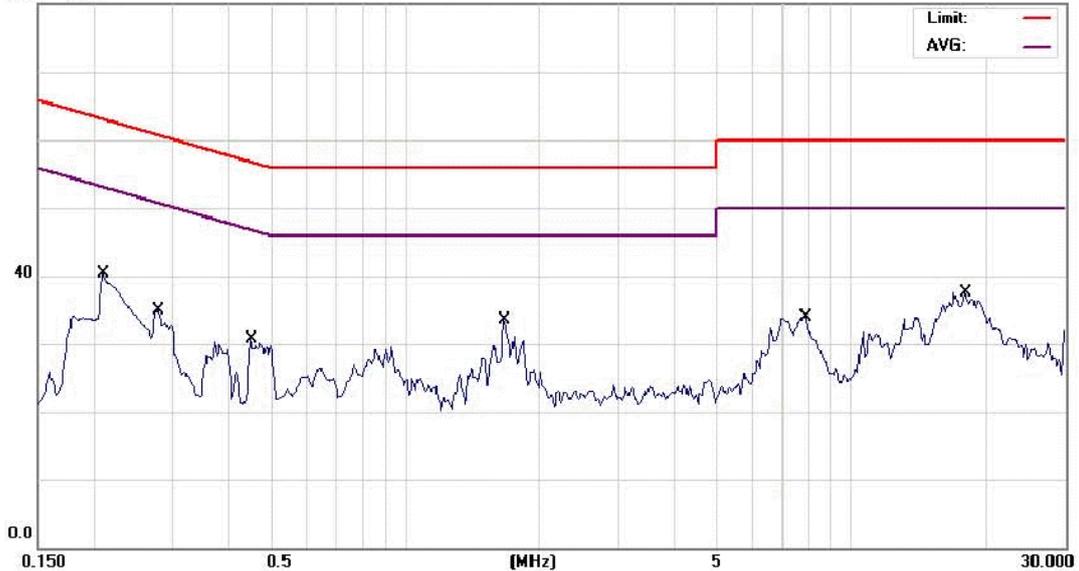

Site SGS CONDUCTED #1

Limit: CISPR22 Class B Conduction(QP)

EUT: HSDPA / WCDMA / GSM / GPRS USB Modem

MN: MF622

Note: GSM 850 LINK

Phase: N

Power: AC 120V/60Hz

Distance:

Temperature: 25 °C

Humidity: 62 %

Air Pressure: hpa


No. Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.2100	39.82	0.53	40.35	63.21	-22.86	QP	
2	0.2800	34.41	0.56	34.97	60.82	-25.85	QP	
3	0.4500	30.04	0.64	30.68	56.88	-26.20	QP	
4 *	1.6700	32.65	0.83	33.48	56.00	-22.52	QP	
5	7.9200	32.87	1.08	33.95	60.00	-26.05	QP	
6	18.0000	36.25	1.22	37.47	60.00	-22.53	QP	

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	GSM 1900 Link	Test Date:	Sep. 19, 2007
Temperature:	25 °C	Humidity:	62 %
		Test By:	Sky

Conducted Emission Measurement

上午 10:37:14
 80.0 dBuV

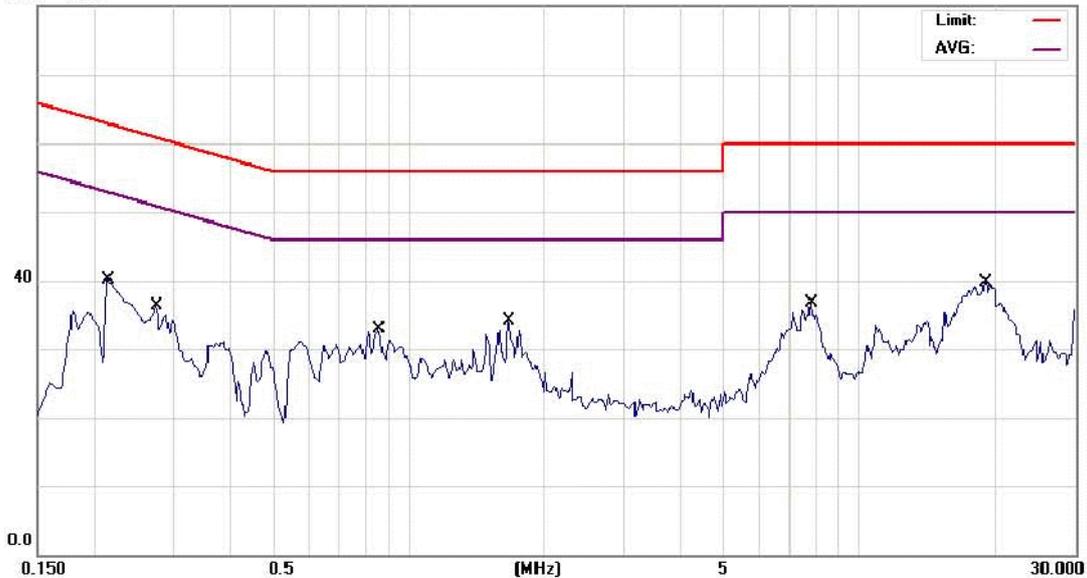

Site SGS CONDUCTED #1	Phase: L1	Temperature: 25 °C
Limit: CISPR22 Class B Conduction(QP)	Power: AC 120V/60Hz	Humidity: 62 %
EUT: HSDPA / WCDMA / GSM / GPRS USB Modem	Distance:	Air Pressure: hpa
MN: MF622		
Note: GSM 1900 LINK		


No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2150	39.62	0.53	40.15	63.01	-22.86	QP	
2		0.2750	35.70	0.56	36.26	60.97	-24.71	QP	
3		0.8600	32.20	0.77	32.97	56.00	-23.03	QP	
4		1.6700	33.25	0.83	34.08	56.00	-21.92	QP	
5		7.8200	35.61	1.08	36.69	60.00	-23.31	QP	
6	*	19.1200	38.52	1.24	39.76	60.00	-20.24	QP	

This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

Conducted Emission Measurement

上午 10:32:22

80.0 dBuV

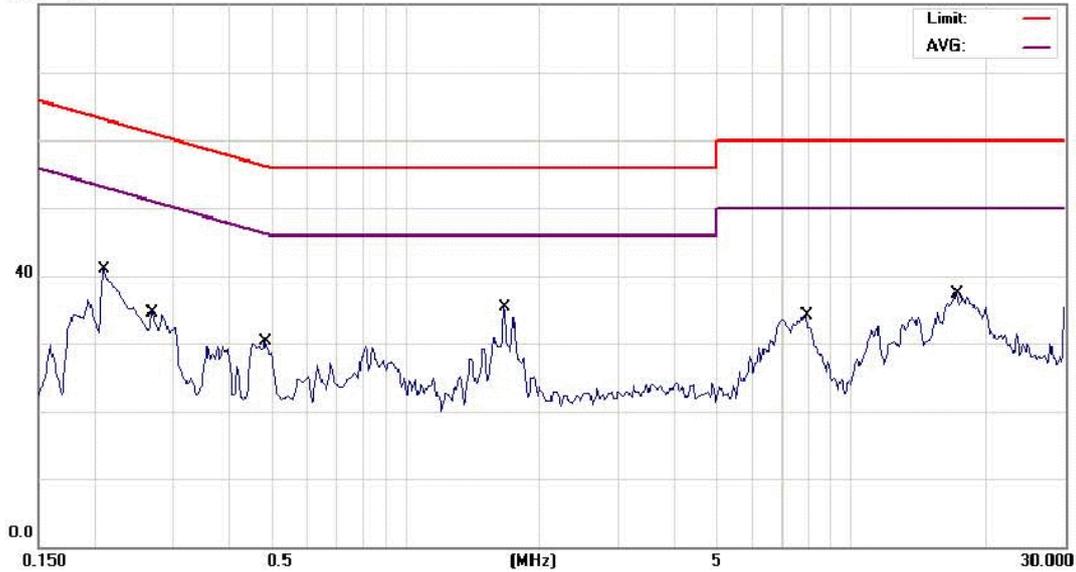

Site SGS CONDUCTED #1

Phase: **N**

Temperature: 25 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 62 %

EUT: HSDPA / WCDMA / GSM / GPRS USB Modem

Distance:

Air Pressure: hpa

M/N: MF622

Note: GSM 1900 LINK


No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2100	40.46	0.53	40.99	63.21	-22.22	QP	
2		0.2700	33.92	0.56	34.48	61.12	-26.64	QP	
3		0.4850	29.58	0.65	30.23	56.25	-26.02	QP	
4	*	1.6700	34.53	0.83	35.36	56.00	-20.64	QP	
5		7.9400	33.03	1.09	34.12	60.00	-25.88	QP	
6		17.2000	36.13	1.21	37.34	60.00	-22.66	QP	

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	WCDMA Band II Link			Test Date:	Sep. 19, 2007
Temperature:	25 °C	Humidity:	62 %	Test By:	Sky

Conducted Emission Measurement

上午 10:50:53
 80.0 dBuV

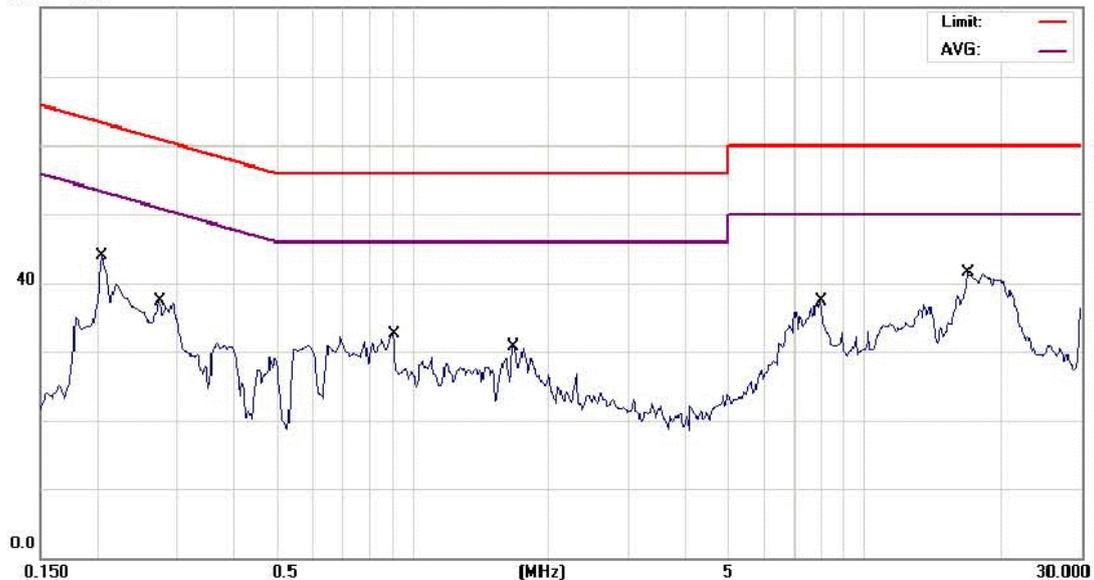

Site SGS CONDUCTED #1	Phase: L1	Temperature: 25 °C
Limit: CISPR22 Class B Conduction(QP)	Power: AC 120V/60Hz	Humidity: 62 %
EUT: HSDPA / WCDMA / GSM / GPRS USB Modem	Distance:	Air Pressure: hpa
MN: MF622		
Note: WCDMA BAND 2 LINK		


No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2050	43.32	0.52	43.84	63.41	-19.57	QP	
2		0.2750	36.74	0.56	37.30	60.97	-23.67	QP	
3		0.9050	31.70	0.78	32.48	56.00	-23.52	QP	
4		1.6700	29.85	0.83	30.68	56.00	-25.32	QP	
5		7.9800	36.16	1.09	37.25	60.00	-22.75	QP	
6	*	16.9600	40.33	1.21	41.54	60.00	-18.46	QP	

This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

Conducted Emission Measurement

上午 10:52:57

80.0 dBuV

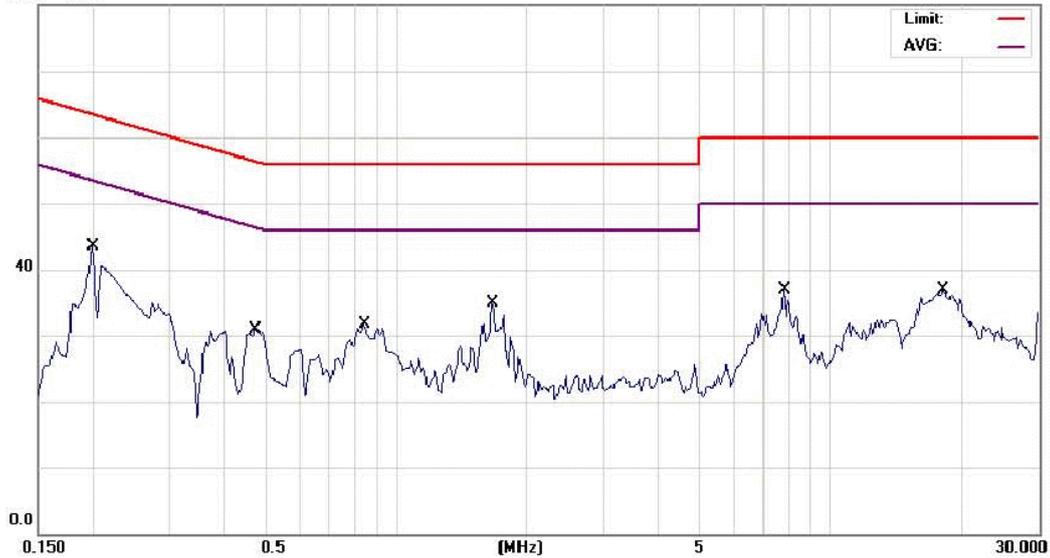

Site SGS CONDUCTED #1	Phase: N	Temperature: 25 °C
Limit: CISPR22 Class B Conduction(QP)	Power: AC 120V/60Hz	Humidity: 62 %
EUT: HSDPA / WCDMA / GSM / GPRS USB Modem	Distance:	Air Pressure: hpa
MN: MF622		
Note: WCDMA BAND 2 LINK		

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.2000	42.98	0.52	43.50	63.61	-20.11	QP	
2		0.4750	30.28	0.65	30.93	56.43	-25.50	QP	
3		0.8450	30.94	0.76	31.70	56.00	-24.30	QP	
4		1.6700	34.03	0.83	34.86	56.00	-21.14	QP	
5		7.8200	35.83	1.08	36.91	60.00	-23.09	QP	
6		18.2000	35.68	1.23	36.91	60.00	-23.09	QP	

This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。


AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	WCDMA Band V Link			Test Date:	Sep. 19, 2007
Temperature:	25 °C	Humidity:	62 %	Test By:	Sky

Conducted Emission Measurement

上午 10:56:29

80.0 dBuV

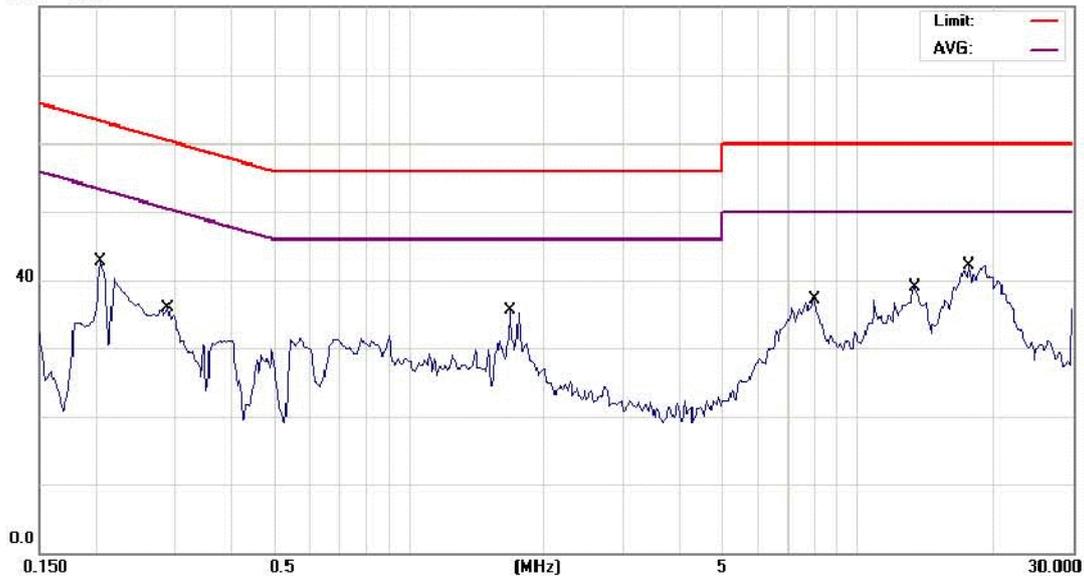


Site SGS CONDUCTED #1	Phase: L1	Temperature: 25 °C
Limit: CISPR22 Class B Conduction(QP)	Power: AC 120V/60Hz	Humidity: 62 %
EUT: HSDPA / WCDMA / GSM / GPRS USB Modem	Distance:	Air Pressure: hpa
M/N: MF622		
Note: WCDMA BAND 5 LINK		

No. Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.2050	42.22	0.52	42.74	63.41	-20.67	QP	
2	0.2900	35.31	0.56	35.87	60.52	-24.65	QP	
3	1.6850	34.71	0.83	35.54	56.00	-20.46	QP	
4	8.0000	36.10	1.09	37.19	60.00	-22.81	QP	
5	13.3800	37.83	1.16	38.99	60.00	-21.01	QP	
6 *	17.7200	40.94	1.22	42.16	60.00	-17.84	QP	

Conducted Emission Measurement

上午 10:54:32
 80.0 dBuV

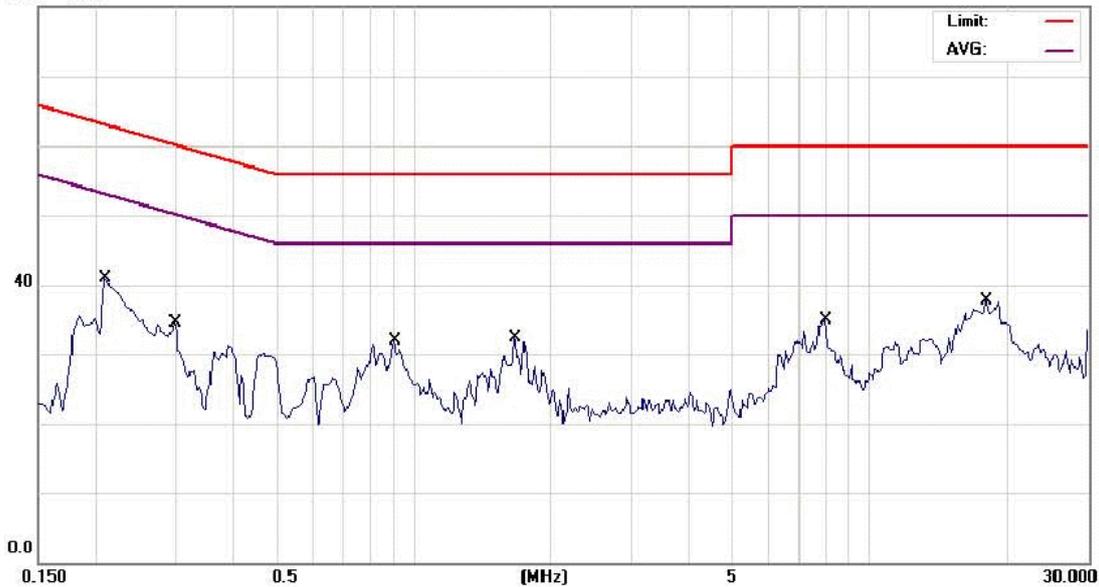

Site SGS CONDUCTED #1 Phase: **N** Temperature: 25 °C
 Limit: CISPR22 Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 62 %
 EUT: HSDPA / WCDMA / GSM / GPRS USB Modem Distance: Air Pressure: hpa
 MN: MF622
 Note: WCDMA BAND 5 LINK

No. Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.2100	40.32	0.53	40.85	63.21	-22.36	QP	
2	0.3000	33.92	0.57	34.49	60.24	-25.75	QP	
3	0.9050	31.08	0.78	31.86	56.00	-24.14	QP	
4	1.6700	31.47	0.83	32.30	56.00	-23.70	QP	
5	7.9800	33.86	1.09	34.95	60.00	-25.05	QP	
6 *	18.0200	36.51	1.22	37.73	60.00	-22.27	QP	



This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

APPENDIX 1

PHOTOGRPHS OF SET UP

This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

Radiated Emission Set up Photos

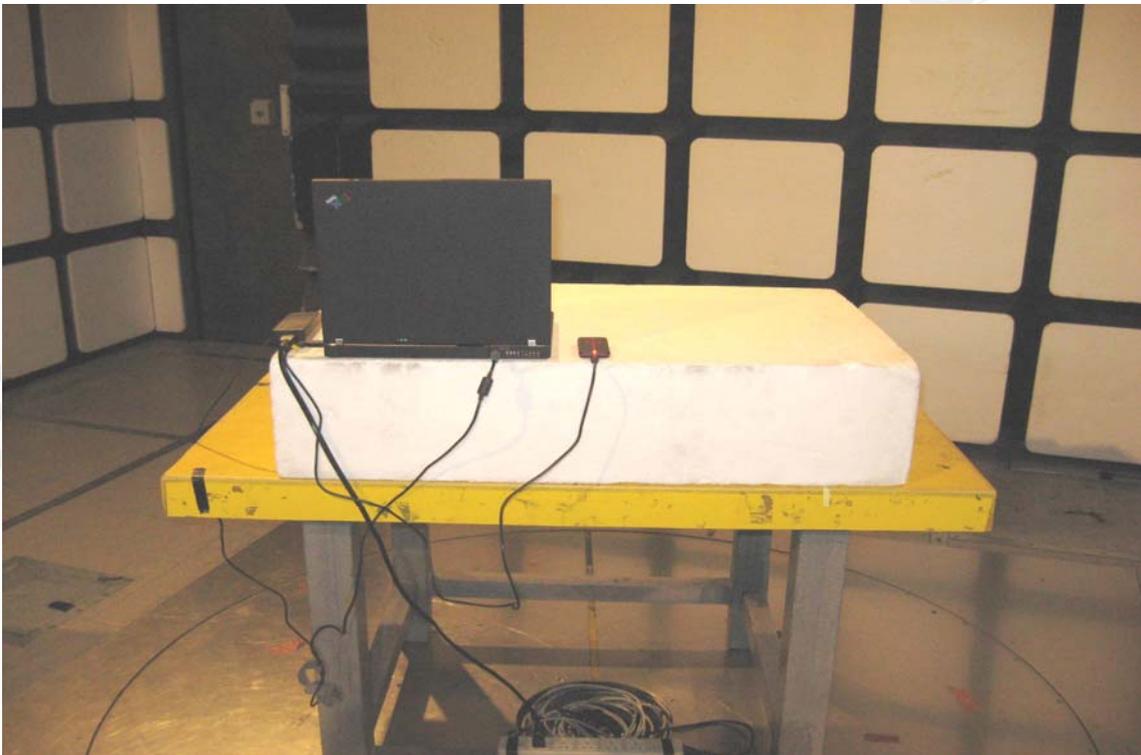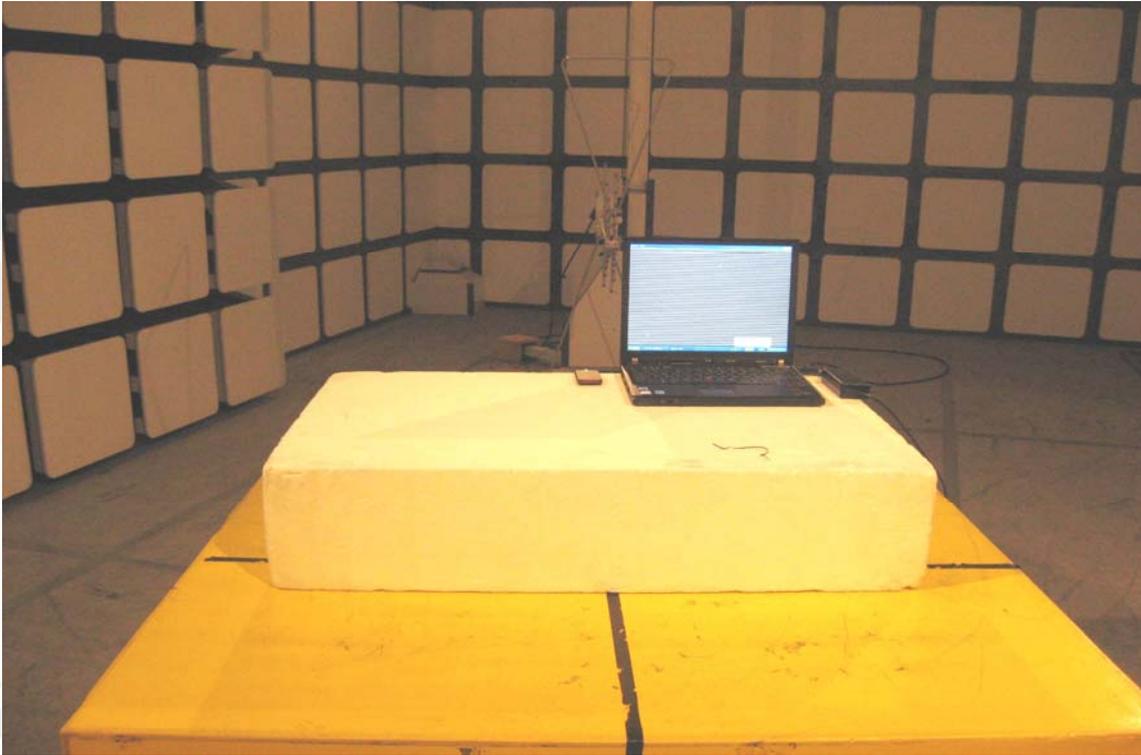

This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

Conducted Emission Set up Photo



This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

APPENDIX 2

PHOTOGRPHS OF EUT

This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

Front View of EUT*Back View of EUT - 1*

This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

Back View of EUT - 2



Side p View of EUT - 1



This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

Side View of EUT - 2




Open View of EUT - 1




This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

Open View of EUT - 2

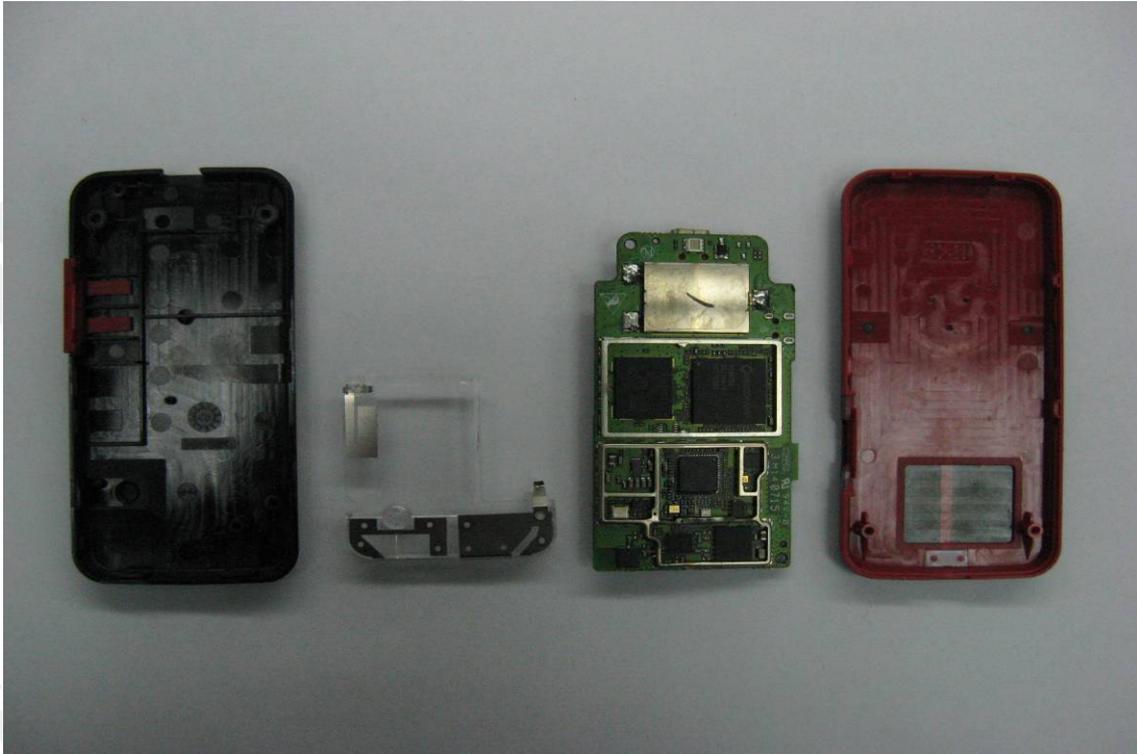

Internal of EUT - 1

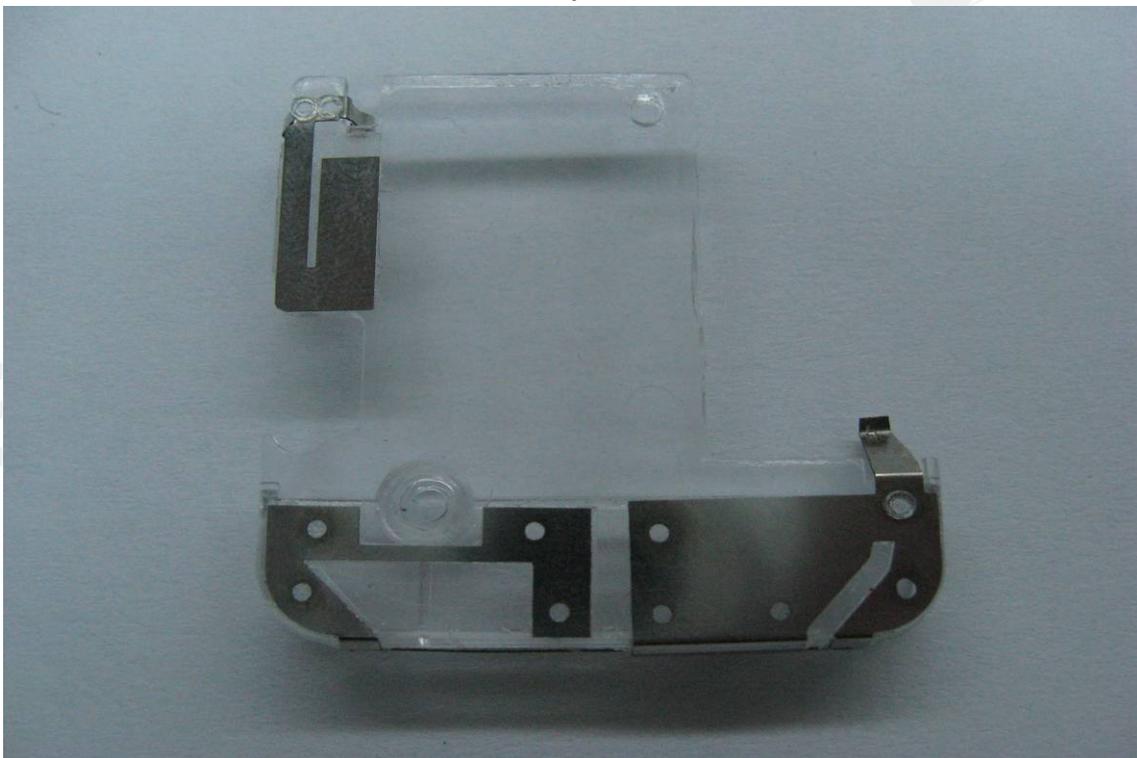


This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。


Internal of EUT - 2



Internal of EUT - 3

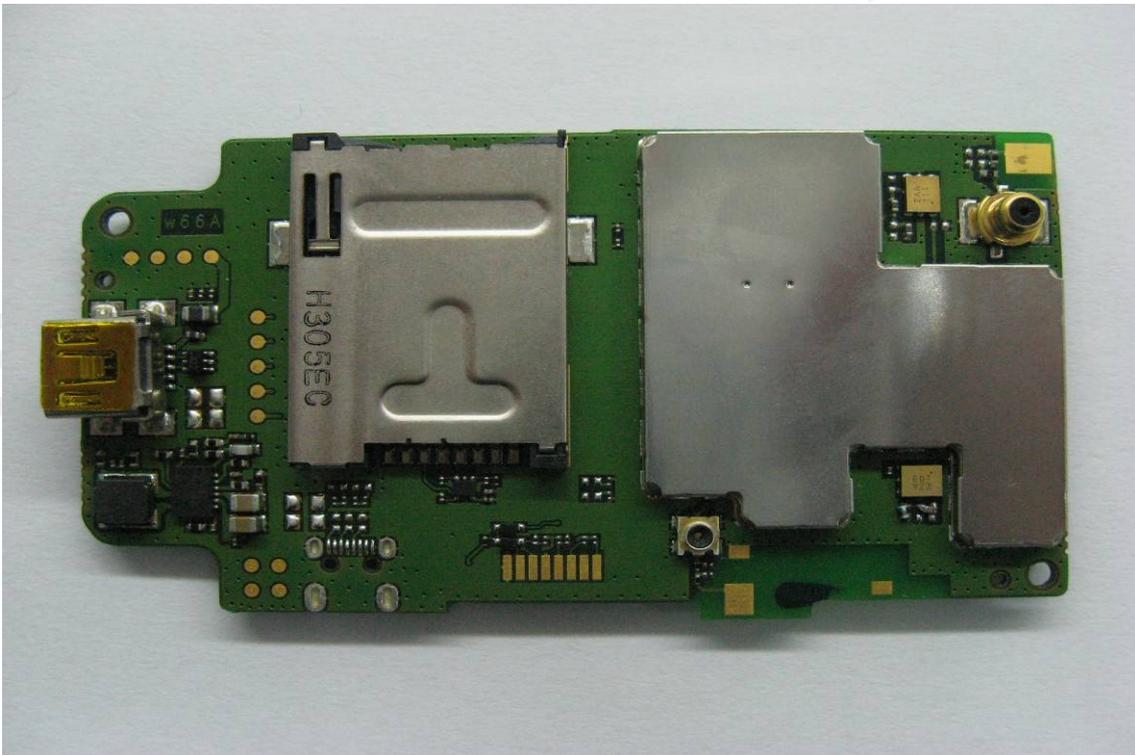

This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

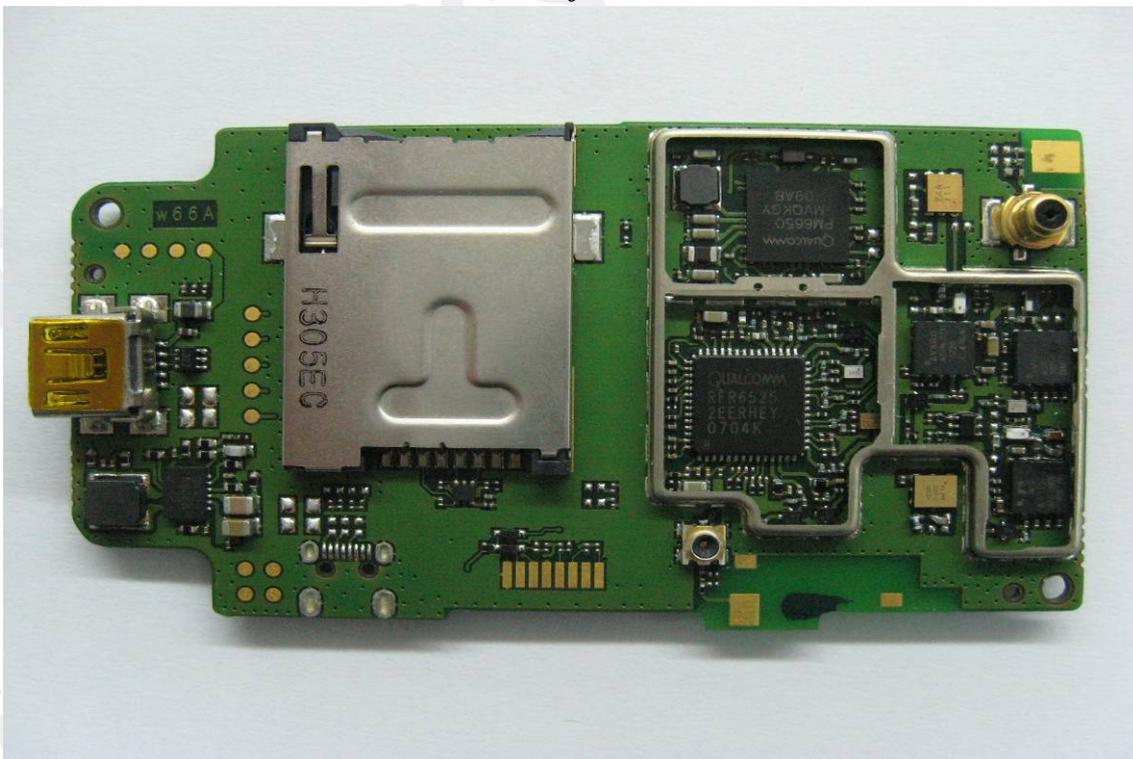Internal of EUT – 4

~ End of Report ~