

TEST REPORT

Equipment Under Test:	HSDPA USB Modem
Market name:	MF626
FCC ID	Q78-ZTEMF626
Hardware Version:	P673M3-2.0.0
Software Version:	BD_P673M3V1.0.0B05
Applicant:	ZTE CORPORATION
Address of Applicant:	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
Date of Receipt:	2008.09.27
Date of Test:	2008.09.27 ~ 2008.10.21
Date of Issue:	2008.10.21



Tested by : Will Ni **Date :** 2008.10.21

Approved by : Zhang Yuen **Date :** 2008.10.21

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Contents

Change History	6
Standards:	7
1. General Information	8
1.1 Test Laboratory	8
1.2 Details of Applicant	8
1.3 Description of EUT(s)	8
1.4 Test Environment	9
1.5 Operation Configuration	9
1.6 SAM Twin Phantom	12
1.7 Device Holder for Transmitters	13
1.8 Description of Test Position	13
1.9 Recipes for Tissue Simulating Liquid	16
1.10 Measurement procedure	17
1.11 The SAR Measurement System	18
1.12 SAR System Verification	20
1.13 Tissue Simulant Fluid for the Frequency Band 835MHZ and 1900MHZ	21
1.14 Test Standards and Limits	21
2. Summary of Results	22
3. Instruments List	27
4. Measurements	28
4.1 GSM850-Body-Worn-GPRS-Middle-P1	28
GSM850-Body-Worn-GPRS-Mid-P1 0.5cm	28
4.2 GSM850-Body-Worn-GPRS-Middle-P2	29
GSM850-Body-Worn-GPRS-Mid-P2 0.5cm	30
4.3 GSM850-Body-Worn- GPRS -Middle-P3	31
GSM850-Body-Worn-GPRS-Mid-P3 0.5cm	31
4.4 GSM850-Body-Worn- GPRS -Middle-P4	33
GSM850-Body-Worn-GPRS-Mid-P4 0.5cm	33
4.5 GSM850-Body-Worn- GPRS -Middle-P5	35
GSM850-Body-Worn-GPRS-Mid-P5 0.5cm	35
4.6 GSM850-Body-Worn-EGPRS-Middle-P1	37
GSM850-Body-Worn-EDGE-Mid-P1 0.5cm	37
4.7 GSM850-Body-Worn-EGPRS-Middle-P2	39
GSM850-Body-Worn-EDGE-Mid-P2 0.5cm	39
4.8 GSM850-Body-Worn-EGPRS-Middle-P3	41
4.9 GSM850-Body-Worn-EGPRS-Middle-P4	41

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

4.10 GSM850-Body-Worn-EGPRS-Middle-P5	41
4.11 GSM850-Body-Worn-GPRS-Worstcase-Low	41
GSM850-Body-Worn-GPRS-Low-P2 0.5cm	42
4.12 GSM850-Body-Worn- GPRS- Worstcase-High	43
GSM850-Body-Worn-GPRS-High-P2 0.5cm	43
GSM850-Body-Worn-GPRS-High-P2 1cm	46
GSM850-Body-Worn-EGPRS-Worstcase-Low	48
GSM850-Body-Worn- EGPRS- Worstcase-High	48
4.13 GSM1900-Body-Worn-GPRS-Middle-P1	48
4.14 GSM1900-Body-Worn-GPRS-Middle-P2	48
PCS1900-Body-Worn--GPRS-Mid-P2 0.5cm	49
4.15 GSM1900-Body-Worn-GPRS-Middle-P3	50
4.16 GSM1900-Body-Worn-GPRS-Middle-P4	50
4.17 GSM1900-Body-Worn- GPRS -Middle-P5	50
4.18 GSM1900-Body-Worn-EGPRS-Middle-P1	50
PCS1900-Body-Worn-EDGE-Mid-P1 0.5cm	51
4.19 GSM1900-Body-Worn-EGPRS-Middle-P2	52
PCS1900-Body-Worn--EDGE-Mid-P2 0.5cm	52
4.20 GSM1900-Body-Worn-EGPRS-Middle-P3	54
PCS1900-Body-Worn--EDGE-Mid-P3 0.5cm	54
4.21 GSM1900-Body-Worn-EGPRS-Middle-P4	56
PCS1900-Body-Worn--EDGE-Mid-P4 0.5cm	56
4.22 GSM1900-Body-Worn-EGPRS-Middle-P5	58
PCS1900-Body-Worn--EGPRS-0.5cm P5	Error! Bookmark not defined.
4.23 GSM1900-Body-Worn-GPRS-Worstcase-Low	60
4.24 GSM1900-Body-Worn- GPRS- Worstcase-High	60
GSM1900-Body-Worn- EGPRS- Worstcase-Low	60
PCS1900-Body-Worn--EDGE-Low-P2 0.5cm	60
PCS1900-Body-Worn--EDGE-Low-P2 1cm	63
GSM1900-Body-Worn- EGPRS- Worstcase-High	65
PCS1900-Body-Worn--EDGE-High-P2 0.5cm.....	65
4.25 WCDMA850-Body-Worn-WCDMA-Middle-P1	67
W850-Body-Worn-WCDMA-Mid-P1 0.5cm.....	67
4.26 WCDMA 850-Body-Worn-WCDMA-Middle-P2	69
W850-Body-Worn-WCDMA-Mid-P2 0.5cm.....	69
4.27 WCDMA 850-Body-Worn-WCDMA-Middle-P3	71
W850-Body-Worn-WCDMA-Mid-P3 0.5cm.....	71
4.28 WCDMA 850-Body-Worn-WCDMA-Middle-P4	73
W850-Body-Worn-WCDMA-Mid-P4 0.5cm.....	73
4.29 WCDMA 850-Body-Worn-WCDMA-Middle-P5	75

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

W850-Body-Worn-WCDMA-Mid-P5 0.5cm.....	75
4.30 WCDMA850-Body-Worn-HSPA-Middle-P1	77
4.31 WCDMA 850-Body-Worn-HSPA-Middle-P2.....	77
4.32 WCDMA 850-Body-Worn-HSPA-Middle-P3.....	77
4.33 WCDMA 850-Body-Worn-HSPA-Middle-P4.....	77
4.34 WCDMA 850-Body-Worn-HSPA-Middle-P5.....	77
4.35 WCDMA 850-Body-Worn-WCDMA-Worstcase-Low.....	77
4.36 WCDMA 850-Body-Worn- WCDMA-Worstcase-High.....	78
WCDMA 850-Body-Worn-HSPA- HSDPA-Worstcase-Low	78
WCDMA 850-Body-Worn-HSPA- HSDPA-Worstcase-High	78
4.37 WCDMA 1900-Body-Worn-WCDMA-Middle-P1	78
W1900-Body-Worn-WCDMA-Mid-P1 0.5cm.....	78
4.38 WCDMA 1900-Body-Worn-WCDMA-Middle-P2	80
W1900-Body-Worn-WCDMA-Mid-P2 0.5cm.....	80
W1900-Body-Worn-WCDMA-Mid-P2 1cm.....	82
4.39 WCDMA 1900-Body-Worn-WCDMA-Middle-P3	84
W1900-Body-Worn-WCDMA-Mid-P3 0.5cm.....	84
4.40 WCDMA 1900-Body-Worn-WCDMA-Middle-P4	86
W1900-Body-Worn-WCDMA-Mid-P4 0.5cm.....	86
4.41 WCDMA 1900-Body-Worn-WCDMA-Middle-P5	88
W1900-Body-Worn-WCDMA-Mid-P5 0.5cm.....	88
4.42 WCDMA 1900-Body-Worn-HSPA-Middle-P1	90
W1900-Body-Worn-HSDPA-Mid-P1 0.5cm.....	90
4.43 WCDMA 1900-Body-Worn-HSPA-Middle-P2	92
W1900-Body-Worn-HSDPA-Mid-P2 0.5cm.....	92
4.44 WCDMA 1900-Body-Worn-HSPA-Middle-P3	94
4.45 WCDMA 1900-Body-Worn- HSPA -Middle-P4	94
4.46 WCDMA 1900-Body-Worn- HSPA -Middle-P5	94
4.47 WCDMA1900-Body-Worn--WCDMA--Worstcase-Low	94
W1900-Body-Worn-WCDMA-Low-P2 0.5cm	95
4.48 WCDMA1900-Body-Worn--WCDMA-- Worstcase-High	96
W1900-Body-Worn-WCDMA-High-P2 0.5cm	96
WCDMA1900-Body-Worn- WCDMA -P1-Low	98
W1900-Body-Worn-WCDMA-Low-P1 0.5cm	98
WCDMA1900-Body-Worn- WCDMA -P1-High	100
W1900-Body-Worn-WCDMA-High-P1 0.5cm	100
WCDMA1900-Body-Worn-HSPA-Worstcase-Low	102
WCDMA1900-Body-Worn- HSPA-Worstcase-High	102
System Performance Check	102
System Validation for 900MHz-Body-Worn	102

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SystemPerformanceCheck-D900-Body-0927	103
System Validation for 900MHz-Body-Worn	104
SystemPerformanceCheck-D900-Body-0928	104
System Validation for 1900MHz-Body-Worn	106
SystemPerformanceCheck-D1900-Body-0929	106
System Validation for 1900MHz-Body-Worn	108
SystemPerformanceCheck-D1900-Body-0930	108
System Validation for 1900MHz-Body-Worn	110
SystemPerformanceCheck-D1900-Body-1021	110
Appendix	113
1. Photographs of Test Setup	113
2. Photographs of the EUT	116
3. Probe Calibration certificate	117
4. DAE Calibration certification	126
7. Dipole Calibration certification	131
8. Uncertainty analysis	149
9. CNAS Certificate	150

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Change History

Version	Change contents	Author	Date
V1.0	First edition	Will Ni	2008-10-1
V1.1	Update system validation in page110	Will Ni	2008-10-21

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Standards:

The Equipment under Test (EUT) has been tested at SGS's (own or subcontracted) laboratories. The following table summarizes the specific reference documents such as harmonized standards or test specifications which were used for testing as SGS's (own or subcontracted) laboratories.

Identity	Document Title	Version
FCC OET Bulletin 65 supplement C	Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields	
IEEE1528	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques	2003

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS-CSTC Shanghai GSM Lab or testing done by SGS-CSTC Shanghai GSM Lab must approve SGS Shanghai GSM Lab in connection with distribution or use of the product described in this report in writing.

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

1. General Information

1.1 Test Laboratory

GSM Laboratory

SGS-CSTC Standards Technical Services Co., Ltd Shanghai Branch
 9F, the 3rd Building, No.889, Yishan Rd, Xuhui District, Shanghai, China
 Zip code: 200233

Telephone: +86 (0) 21 6495 1616
 Fax: +86 (0) 21 5450 0149
 Internet: <http://www.cn.sgs.com>

1.2 Details of Applicant

Name:

ZTE CORPORATION

Address:

ZTE Plaza, Keji Road South, Hi-Tech
 Industrial Park, Nanshan
 District, Shenzhen, Guangdong,
 518057, P.R.China

Contact Person:

Li Dezi

1.3 Description of EUT(s)

Brand name	ZTE	
Market Name	MF626	
Status of Product	Production	
Hardware Version	P673M3-2.0.0	
Software Version	BD_P673M3V1.0.0B05	
Serial No.	IMEI: 004401780172025	
Battery Type	USB /No Battery	
Antenna Type	Inner Antenna	
Operation Mode	GSM/GPRS/EDGE/WCDMA/HSDPA	
Modulation Mode	GMSK/8PSK/QPSK	
Frequency range	GSM850	Tx: 824~849 MHz
		Rx: 869~894 MHz
	PCS1900	Tx: 1850~1910 MHz
		Rx: 1930~1990 MHz

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

	WCDMA FDD Band II	Tx: 1850~1910 MHz Rx: 1930~1990 MHz
	WCDMA FDD Band V	Tx: 824~849 MHz Rx: 869~894MHz
Nominal Maximum RF Conducted Power/MS Power Class	GSM850:GMSK/33.0dBm;8PSK/27.0dBm PCS1900: GMSK/30.0dBm;8PSK/26.0dBm WCDMA1900: 24.0dBm WCDMA850: 24.0dBm	

1.4 Test Environment

Ambient temperature: 22.0° C

Tissue Simulating Liquid: 22.0° C

Relative Humidity: 45%~55%

1.5 Operation Configuration


Configuration 1: GSM 850, BodyWorn P1&P2&P3&P4&P5 0.5cm

Configuration 2: PCS 1900, BodyWorn P1&P2&P3&P4&P5 0.5cm

Configuration 3: WCDMA FDD II, BodyWorn P1&P2&P3&P4&P5 0.5cm

Configuration 4: WCDMA FDD V, BodyWorn P1&P2&P3&P4&P5 0.5cm

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

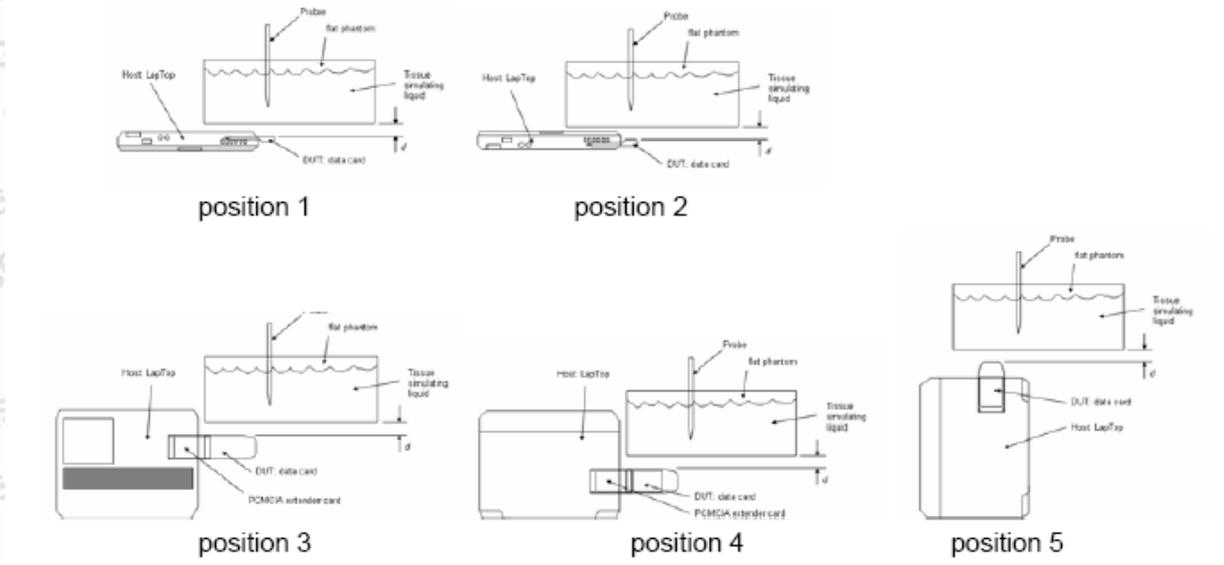

Note: A USB cable was used during the tests in accordance with FCC guidance


For SS

The device was put into operation by using CMU200 radio tester through air link.

The device output power was set to maximum power level for each test with filled battery.

The measurements were performed on lowest, middle and highest channels.

In GPRS mode

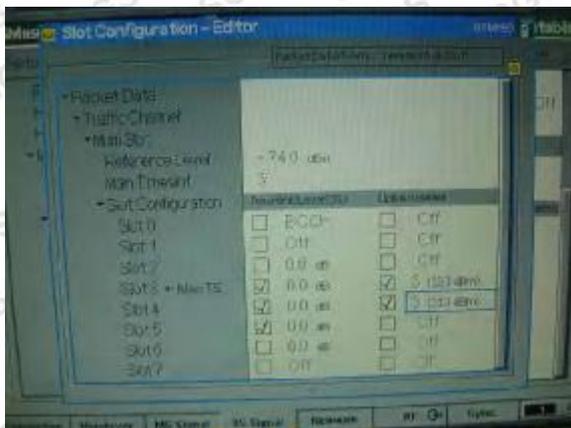


This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM


In EDGE 8PSK mode



In WCDMA mode (12.2 kbps RMC with TPC set to all 1)

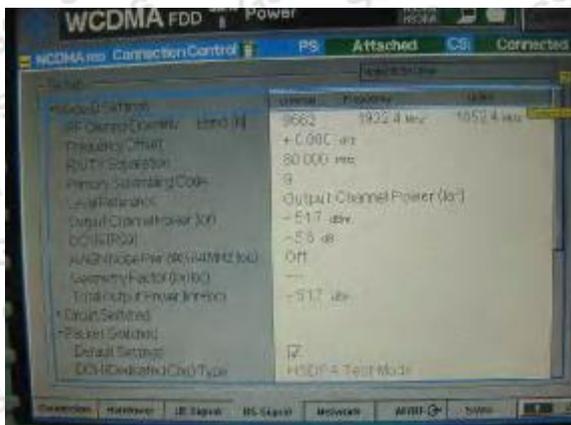

In HSDPA mode

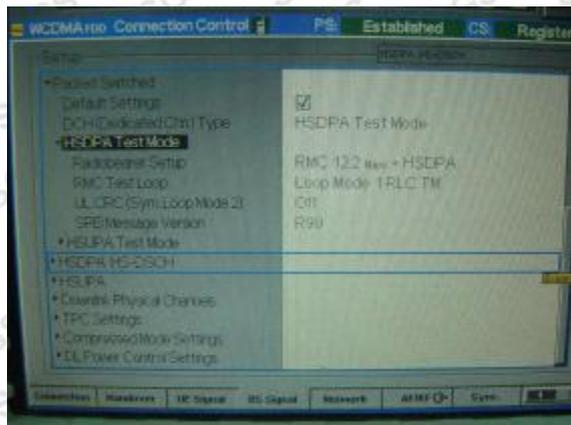

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

1.6 SAM Twin Phantom



The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left hand
- Right hand
- Flat phantom

A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on the cover are possible.

On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

Phantom specification:

Construction:	The shell corresponds to the specifications of Specific Anthropomorphic Mannequin(SAM) Phantom defined in IEEE 1528-2003, EN 50361:2001 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid.
Shell Thickness	2±0.2mm
Filling Volume	Approx.25 liters
Dimensions	Height: 850mm Length: 1000mm Width: 500mm

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

1.7 Device Holder for Transmitters



The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source in 5mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. An accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions, in which the devices must be measured, are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centers for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\tan \delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

1.8 Description of Test Position

1.8.1 SAM Phantom Shape



This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Figure 1—front, back, and side views of SAM (model for the phantom shell). Full-head model is for illustration purposes only—procedures in this recommended practice are intended primarily for the phantom setup of Figure 2. Note: The center strip including the nose region has a different thickness tolerance.

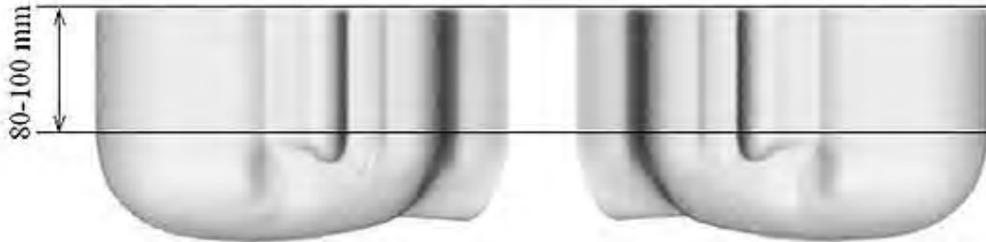


Figure 2—Sagittally bisected phantom with extended perimeter (shown placed on its side as used for SAR measurements)

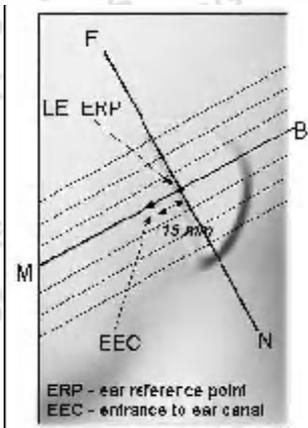


Figure 3—Close-up side view of phantom showing the ear region, N-F and B-M lines, and seven cross-sectional plane locations

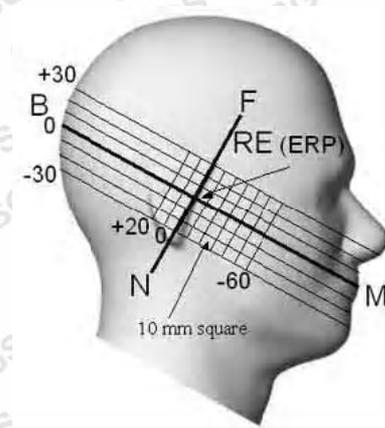


Figure 4—Side view of the phantom showing relevant markings and seven cross-sectional plane locations

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

1.8.2 The following pictures present the different DUT constructions.

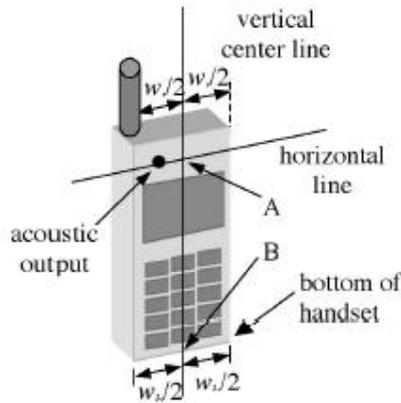


Figure 5a—Handset vertical and horizontal reference lines—“fixed case”

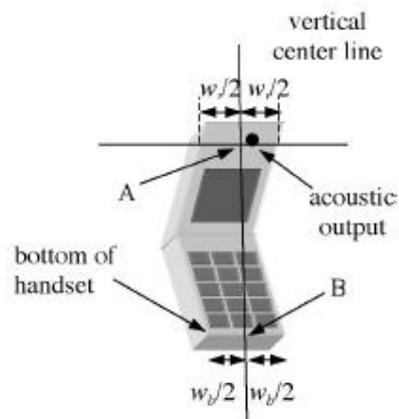


Figure 5b—Handset vertical and horizontal reference lines—“clam-shell case”

1.8.3 Definition of the “cheek” position:

- Position the device with the vertical centre line of the body of the device and the horizontal line crossing the centre of the ear piece in a plane parallel to the sagittal plane of the phantom ("initial position" see Figure 6). While maintaining the device in this plane, align the vertical centre line with the reference plane containing the three ear and mouth reference points (M, RE and LE) and align the centre of the ear piece with the line RE-LE;
- Translate the mobile phone box towards the phantom with the ear piece aligned with the line LE-RE until the phone touches the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the box until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

1.8.4 Definition of the “tilted” position:

- Position the device in the “cheek” position described above;
- While maintaining the device in the reference plane described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

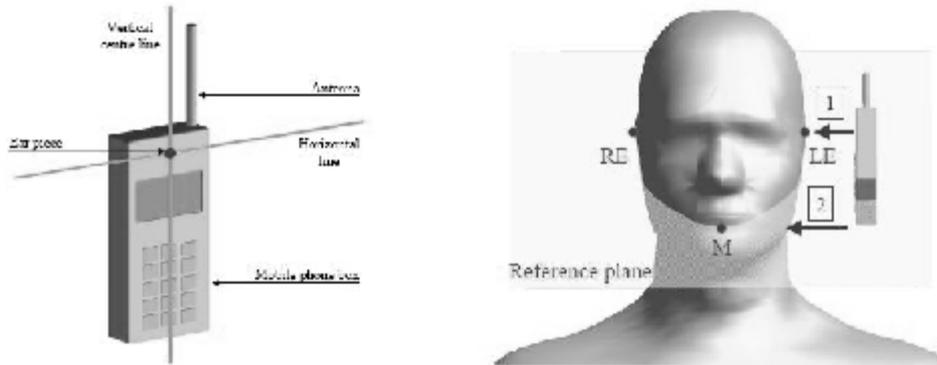


Figure 6 - Definition of the reference lines and points, on the phone and on the phantom and initial position

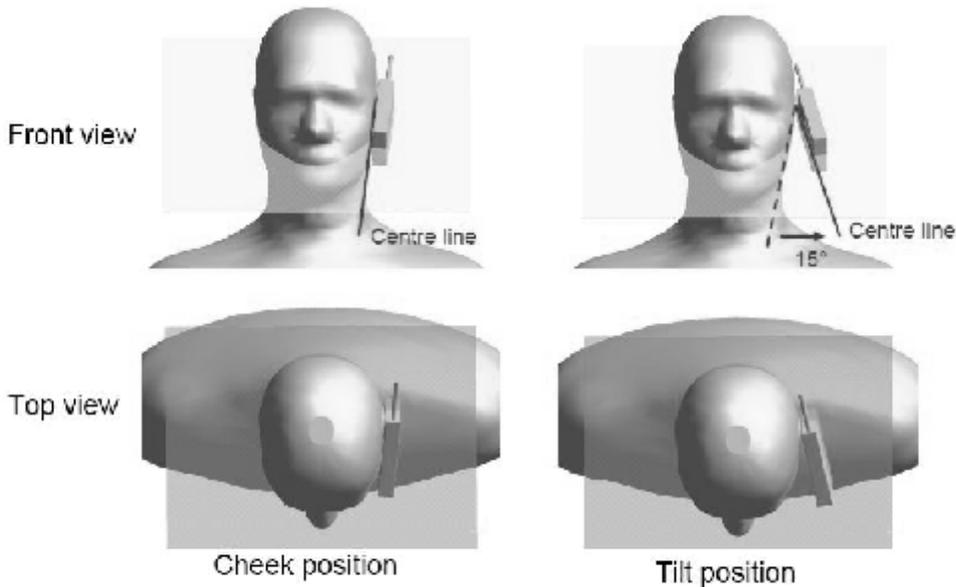


Figure 7 -“Cheek” and “tilt” positions of the mobile phone on the left side

1.9 Recipes for Tissue Simulating Liquid

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands.

Ingredient	835MHz	1900MHz
Water	40.29%	55.24%
Sugar	57.90%	-

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Salt (NaCl)	1.38%	0.31%
DGBE	-	44.45%
Preventol	0.18%	-
HEC	0.24%	-
Relative Permittivity	41.5	40.0
Conductivity (S/m)	0.90	1.40

Table 1: Composition of the Brain Tissue Equivalent Matter

Ingredient	835MHz	1900MHz
Water	50.75%	70.17%
Sugar	48.21%	-
Salt (NaCl)	0.94%	0.39%
DGBE	-	29.44%
Preventol	0.10%	-
HEC	0.00	-
Relative Permittivity	55.2	53.3
Conductivity (S/m)	0.97	1.52

Table 2: Composition of the Body Tissue Equivalent Matter

1.10 Measurement procedure

Step 1: Power reference measurement

The SAR measurement was taken at a selected spatial reference point to monitor power variations during testing. This fixed location point was measured and used as a reference value.

Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 3.9mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 20mm*20mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Zoom scan

Around this point, a volume of 30mm*30mm*34mm (fine resolution volume scan, zoom scan) was assessed by measuring 7*7*7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the center of the dipoles is 2.1mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification) the extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes.

This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points (10*10*10) were interpolated to calculate the average. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Power reference measurement (drift)

The SAR value at the same location as in step 1 was again measured. (If the value changed by more than 5%, the evaluation is repeated.)

1.11 The SAR Measurement System

A photograph of the SAR measurement System is given in Fig. a.

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (Speag Dasy 4 professional system). A Model ES3DV3 3088 E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY4 system for performing compliance tests consists of the following items:

- Y A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension for accommodation the data acquisition electronics (DAE).
- Y A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- Y A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- Y The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

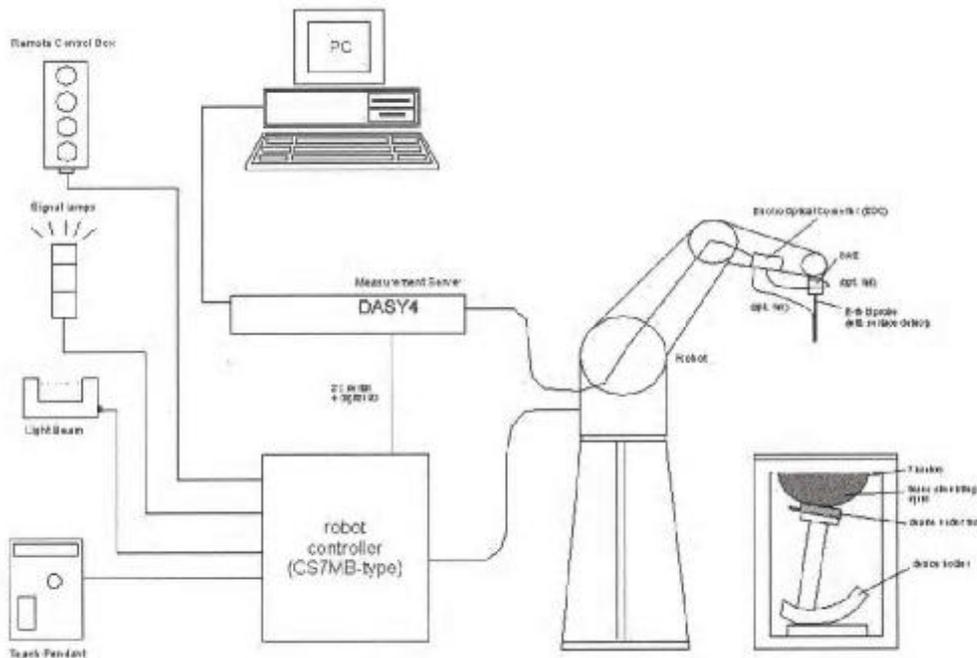


Fig. a SAR System Configuration

- Y The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- Y A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- Y A computer operating Windows 2000.
- Y DASY4 software.
- Y Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- Y The SAM twin phantom enabling testing left-hand, right-hand and body-worn usage.
- Y The device holder for handheld mobile phones.
- Y Tissue simulating liquid mixed according to the given recipes.
- Y Validation dipole kits allowing to validating the proper functioning of the system.

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

1.12 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. These tests were done at 900&1900MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the ambient temperature of the laboratory was in the range 22°C, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

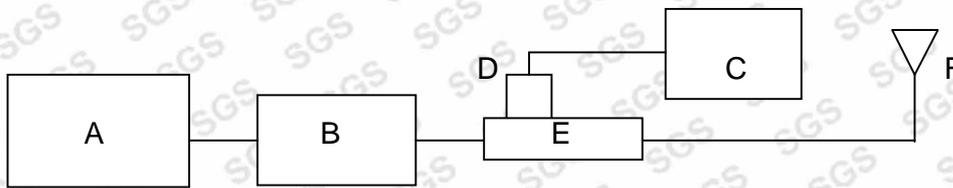


Fig. b the microwave circuit arrangement used for SAR system verification

- A. Agilent Model E4438C Signal Generator
- B. Mini-Circuit Model ZHL-42 Preamplifier
- C. Agilent Model E4416A Power Meter
- D. Agilent Model 8481H Power Sensor
- E. HT CP6100 20N Dual directional coupler
- F. Reference dipole antenna

Validation Kit	Frequency MHz	Target SAR 1g (250mW)	10% Limit Range	Measured SAR 1g	Measured Date
D900V2 184	900 Body	2.9	2.61~3.19	2.82	2008-09-27
				2.76	2008-09-28
D1900V2 5d028	1900 Body	9.34	8.41~10.27	8.51	2008-09-29
				8.78	2008-09-30
				9.26	2008-10-21

Table 1. Result System Validation

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

1.13 Tissue Simulant Fluid for the Frequency Band 835MHZ and 1900MHZ

The dielectric properties for this body-simulant fluid were measured by using the HP Model 85070D Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Agilent E5071B Network Analyzer (300 KHz-8500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in Table 1. For the SAR measurement given in this report. The temperature variation of the Tissue Simulant Fluid was 22°C.

Frequency (MHz)	Tissue Type	Limit/Measured	Permittivity (ρ)	Conductivity (σ)	Simulated Tissue Temp (°C)
835	Body	Recommended Limit	55.2±5%	0.97±5%	20-24
		Measured, 2008-09-27	55.0	0.97	22.2
		Measured, 2008-09-28	55.0	0.97	22.5
1900	Body	Recommended Limit	53.3±5%	1.52±5%	20-24
		Measured, 2008-09-29	53.2	1.59	22.3
		Measured, 2008-09-30	53.2	1.59	22.6
		Measured, 2008-10-21	52.1	1.58	22.4

Table 2. Dielectric parameters for the Frequency Band 835&1900MHZ

1.14 Test Standards and Limits

Standards:

According to FCC 47 CFR §2.1093(d) the limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3KHz to 300GHz," ANSI/IEEE C95.1-1992, Copyright 1992 by the Institute of Electrical & Electronics Engineers, Inc., New York, New York 10071.

Human Exposure	Uncontrolled Environment General Population
Spatial Peak SAR (Brain)	1.60 mW/g (averaged over a mass of 1g)

Table 3. RF Exposure Limits

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

2. Summary of Results

Maximum Conducted Power

Power(dBm)		Lowest Channel	Middle Channel	Highest Channel
GSM850	GPRS	32.3	32.9	32.9
	EDGE	26.5	26.9	26.5
PCS1900	GPRS	28.3	28.6	28.3
	EDGE	25.9	25.9	25.8
Band V	WCDMA	23.2	23.1	23.3
	HSDPA	23.05	22.92	23.2
Band II	WCDMA	22.1	21.4	21.5
	HSDPA	22.0	21.2	21.4

GSM850

850	Test Configuration		SAR, Averaged over 1g(W/kg)			Temperature (°C)	Verdict
	Channel		Low	Middle	High		
Body	P1	GPRS	--	0.695	--	22	Pass
		EGPRS	--	0.618	--	22	Pass
	P2	GPRS	0.718	0.866	1.05	22	Pass
		EGPRS	--	0.761	--	22	Pass
	P3	GPRS	--	0.460	--	22	Pass
		EGPRS	--	--	--	22	Pass
	P4	GPRS	--	0.153	--	22	Pass
		EGPRS	--	--	--	22	Pass
	P5	GPRS	--	0.056	--	22	Pass
		EGPRS	--	--	--	22	Pass

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

PCS1900

1900	Test Configuration		SAR, Averaged over 1g(W/kg)			Temperature (°C)	Verdict
	Channel		Low	Middle	High		
Body	P1	GPRS	--	--	--	22	Pass
		EGPRS	--	0.735	--	22	Pass
	P2	GPRS	--	0.759	--	22	Pass
		EGPRS	0.877	0.802	0.782	22	Pass
	P3	GPRS	--	--	--	22	Pass
		EGPRS	--	0.455	--	22	Pass
	P4	GPRS	--	--	--	22	Pass
		EGPRS	--	0.527	--	22	Pass
	P5	GPRS	--	--	--	22	Pass
		EGPRS	--	0.187	--	22	Pass

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

WCDMA FDD Band V

850	Test Configuration		SAR, Averaged over 1g(W/kg)			Temperature (°C)	Verdict
	Channel		Low	Middle	High		
Body	P1	WCDMA	--	0.462	--	22	Pass
		HSDPA	--	--	--	22	Pass
	P2	WCDMA	--	0.475	--	22	Pass
		HSDPA	--	--	--	22	Pass
	P3	WCDMA	--	0.086	--	22	Pass
		HSDPA	--	--	--	22	Pass
	P4	WCDMA	--	0.189	--	22	Pass
		HSDPA	--	--	--	22	Pass
	P5	WCDMA	--	0.042	--	22	Pass
		HSDPA	--	--	--	22	Pass

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

WCDMA FDD Band II

1900	Test Configuration		SAR, Averaged over 1g(W/kg)			Temperature (°C)	Verdict
	Channel		Low	Middle	High		
Body	P1	WCDMA	0.796	0.872	0.901	22	Pass
		HSDPA	--	0.718	--	22	Pass
	P2	WCDMA	0.929	0.997	0.907	22	Pass
		HSDPA	--	0.822	--	22	Pass
	P3	WCDMA	--	0.595	--	22	Pass
		HSDPA	--	--	--	22	Pass
	P4	WCDMA	--	0.593	--	22	Pass
		HSDPA	--	--	--	22	Pass
	P5	WCDMA	--	0.154	--	22	Pass
		HSDPA	--	--	--	22	Pass

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Maximum Values

Frequency Band(MHz)	EUT position	Output Power (dBm)	1g Average (W/Kg)	Power Drift (dB)	Temperature (°C)	Verdict
GSM850	Body Worn, GPRS, High Channel, 0.5cm,P2	32.9	1.05	-0.210	22	PASS
PCS1900	Body Worn, GPRS, Low Channel, 0.5cm,P2	25.9	0.877	0.064	22	PASS
WCDMA FDD V	Body Worn, WCDMA, Mid Channel, 0.5cm,P2	23.1	0.475	-0.047	22	PASS
WCDMA FDD II	Body Worn, WCDMA, Mid Channel, 0.5cm,P2	21.4	0.997	-0.329	22	PASS

Note:

- In GSM850 band, the low, middle and high channels are CH128/824.2MHz, CH189/836.4MHz and CH251/848.8MHz separately.
- In PCS1900 band, the low, middle and high channels are CH512/1805.2MHz, CH661/1880.0MHz and CH810/1909.8MHz separately.
- In WCDMA Band II, the low, middle and high channels are CH12/1852.4MHz, CH9400/1880.0MHz and CH9538/1907.6MHz separately.
- In WCDMA Band V, the low, middle and high channels are CH4132/826.4MHz, CH4182/836.4MHz and CH4233/846.6MHz separately.
- ES3DV3 Probe Tip diameter is 3.9 mm and distance from probe tip to dipole centers is 2.0 mm. The additional tests were manually performed according to FCC KDB 447498 and single point SAR values are recorded as shown in table below.

Frequency Band(MHz)	EUT position	Single Point SAR values (W/Kg) VS Distance separation between DUT and Flat Phantom			Full averaged SAR evaluated at the separation distance of	
		5mm	10mm	15mm	10mm	15mm
GSM850	High Chan/ P2/GPRS	1.324	0.6112	0.2646	0.536	--
GSM1900	Low Chan/P2/EDGE	1.026	0.4969	0.2339	0.428	--
Band V	--	--	--	--	--	--
Band II	Middle Chan/ P2/WCDMA	1.077	0.6981	0.3043	0.412	--

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

3. Instruments List

Instrument	Model	Serial number	NO.	Date of last Calibration
Desktop PC	COMPAQ EVO	N/A	GSM-SAR-025	N/A
Dasy 4 software	V 4.7 build 44	N/A	GSM-SAR-001	N/A
Probe	ES3DV3	3088	GSM-SAR-034	2008.1.18
DAE	DAE3	569	GSM-SAR-023	2007.11.19
900MHz system validation dipole	D900V2	184	GSM-SAR-017	2007.12.21
1900MHz system validation dipole	D1900V2	5d028	GSM-SAR-020	2007.12.21
Phantom	SAM 12	TP-1283	GSM-SAR-005	N/A
Robot	RX90L	F03/5V32A1/A01	GSM-SAR-006	N/A
Dielectric probe kit	85070D	US01440168	GSM-SAR-016	2007.12.18
Agilent network analyzer	E5071B	MY42100549	GSM-SAR-007	2007.12.18
Agilent signal generator	E4438	14438CATO-19719	GSM-SAR-008	2007.12.18
Mini-Circuits preamplifier	ZHL-42	D041905	GSM-SAR-033	2007.12.18
Agilent power meter	E4416A	GB41292095	GSM-SAR-010	2007.12.18
Agilent power sensor	8481H	MY41091234	GSM-SAR-011	2007.12.18
HT CP6100 20N Coupling	6100	SCP301480120	GSM-SAR-012	2007.12.18
R&S Universal radio communication tester	CMU200	103633	GSM-AUD-002	2007.12.18

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

4. Measurements

GSM850

4.1 GSM850-Body-Worn-GPRS-Middle-P1

Date/Time: 2008-9-27 23:18:58

Test Laboratory: SGS-GSM

GSM850-Body-Worn-GPRS-Mid-P1 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

Communication System: GSM850-GPRS Mode; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: HSL900-Body Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 55$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.81, 5.81, 5.81); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle P1-2/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.810 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM


Body Worn - Middle P1-2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.34 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.695 mW/g; SAR(10 g) = 0.440 mW/g

Maximum value of SAR (measured) = 0.757 mW/g

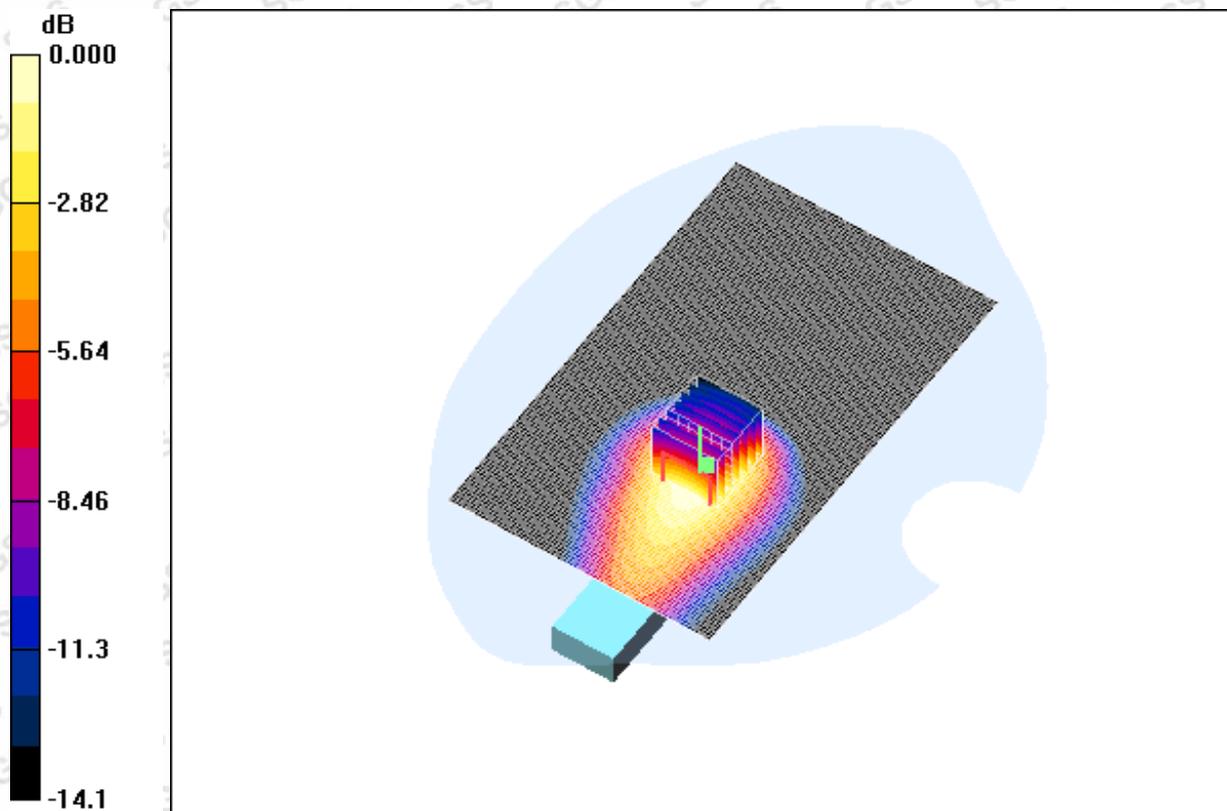

0 dB = 0.757mW/g

4.2 GSM850-Body-Worn-GPRS-Middle-P2

Date/Time: 2008-9-27 21:17:25

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Test Laboratory: SGS-GSM

GSM850-Body-Worn-GPRS-Mid-P2 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

Communication System: GSM850-GPRS Mode; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: HSL900-Body Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.81, 5.81, 5.81); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle P2-2/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.05 mW/g

Body Worn - Middle P2-2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 8.00 V/m; Power Drift = -0.107 dB

Peak SAR (extrapolated) = 1.42 W/kg

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SAR(1 g) = 0.866 mW/g; SAR(10 g) = 0.539 mW/g

Maximum value of SAR (measured) = 0.945 mW/g

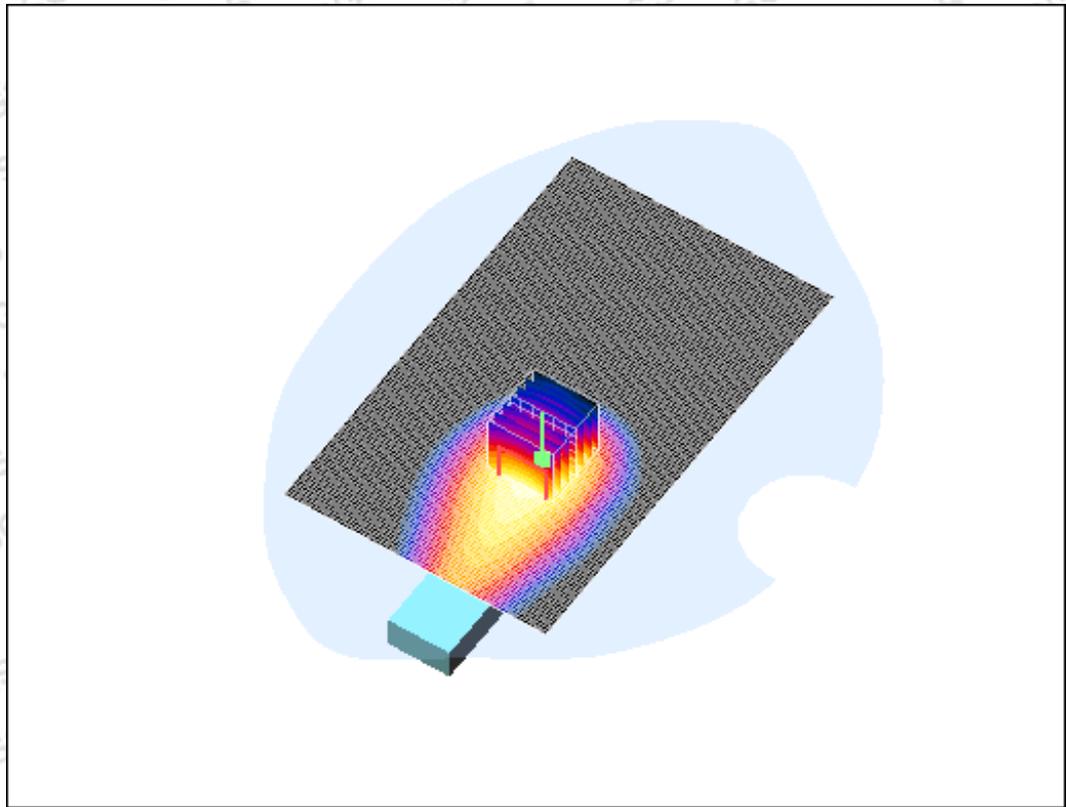

0 dB = 0.945mW/g

4.3 GSM850-Body-Worn- GPRS -Middle-P3

Date/Time: 2008-9-28 8:38:55

Test Laboratory: SGS-GSM

GSM850-Body-Worn-GPRS-Mid-P3 0.5cm

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

DUT: KZ017AK01; Type: Body; Serial: 20080616

Communication System: GSM850-GPRS Mode; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: HSL900-Body Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 55$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.81, 5.81, 5.81); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle P3/Area Scan (81x131x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.526 mW/g

Body Worn - Middle P3/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$



Reference Value = 23.7 V/m; Power Drift = -0.214 dB

Peak SAR (extrapolated) = 0.847 W/kg

SAR(1 g) = 0.460 mW/g; SAR(10 g) = 0.271 mW/g

Maximum value of SAR (measured) = 0.506 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

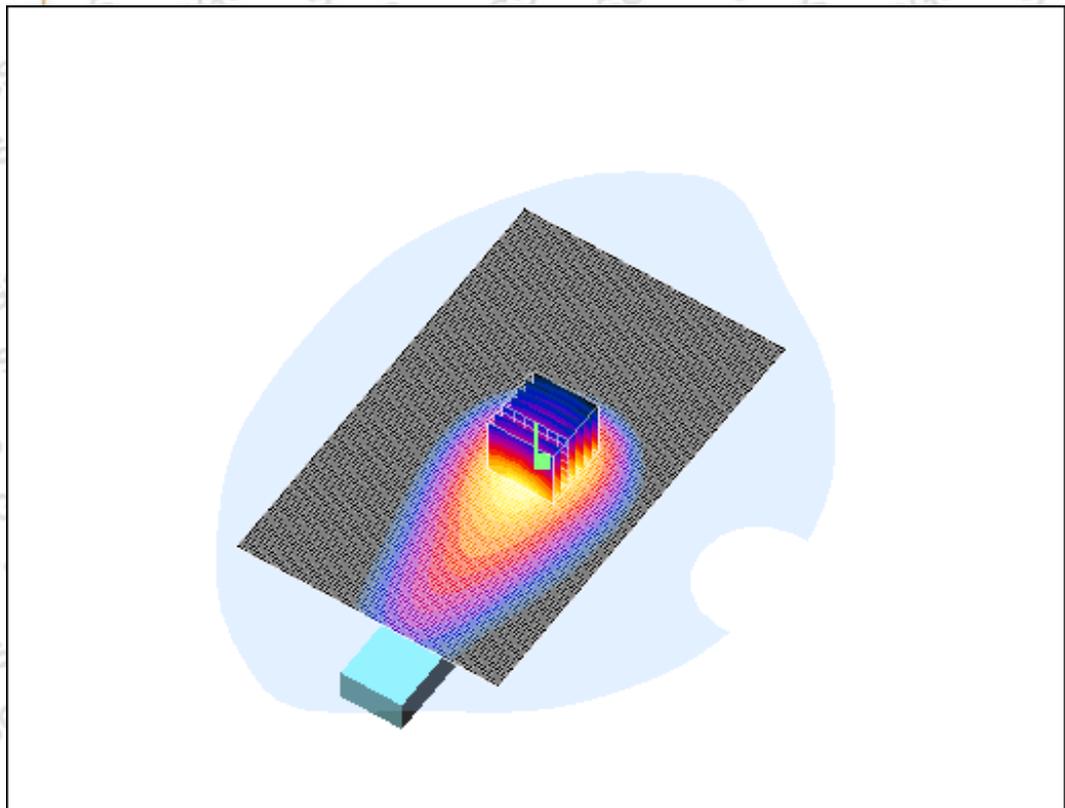

0 dB = 0.506mW/g

4.4 GSM850-Body-Worn- GPRS -Middle-P4

Date/Time: 2008-9-28 10:40:56

Test Laboratory: SGS-GSM

GSM850-Body-Worn-GPRS-Mid-P4 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

Communication System: GSM850-GPRS Mode; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: HSL900-Body Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.81, 5.81, 5.81); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle P4/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.192 mW/g

Body Worn - Middle P4/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 11.7 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.287 W/kg

SAR(1 g) = 0.153 mW/g; SAR(10 g) = 0.095 mW/g

Maximum value of SAR (measured) = 0.168 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

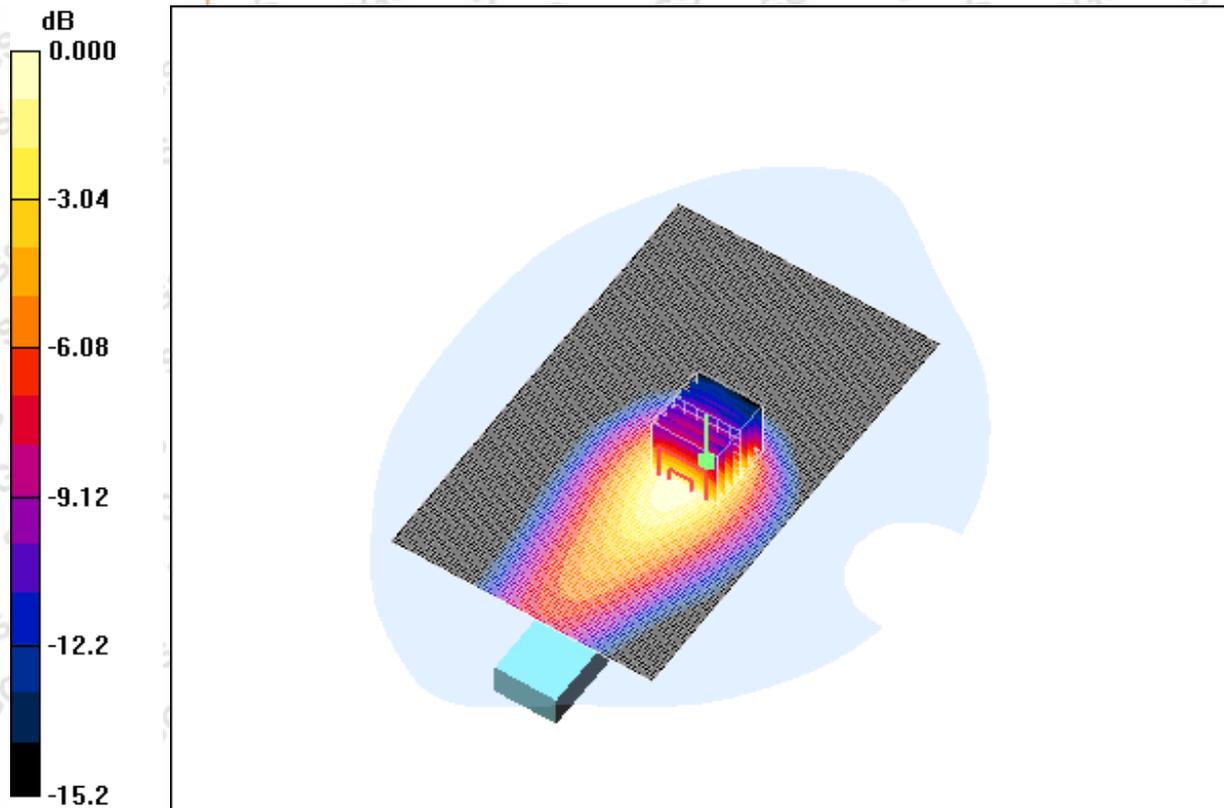

0 dB = 0.168mW/g

4.5 GSM850-Body-Worn- GPRS -Middle-P5

Date/Time: 2008-9-28 13:05:25

Test Laboratory: SGS-GSM

GSM850-Body-Worn-GPRS-Mid-P5 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Communication System: GSM850-GPRS Mode; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: HSL900-Body Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.81, 5.81, 5.81); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle P5/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.059 mW/g

Body Worn - Middle P5/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 5.72 V/m; Power Drift = -0.168 dB

Peak SAR (extrapolated) = 0.132 W/kg

SAR(1 g) = 0.056 mW/g; SAR(10 g) = 0.028 mW/g

Maximum value of SAR (measured) = 0.063 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

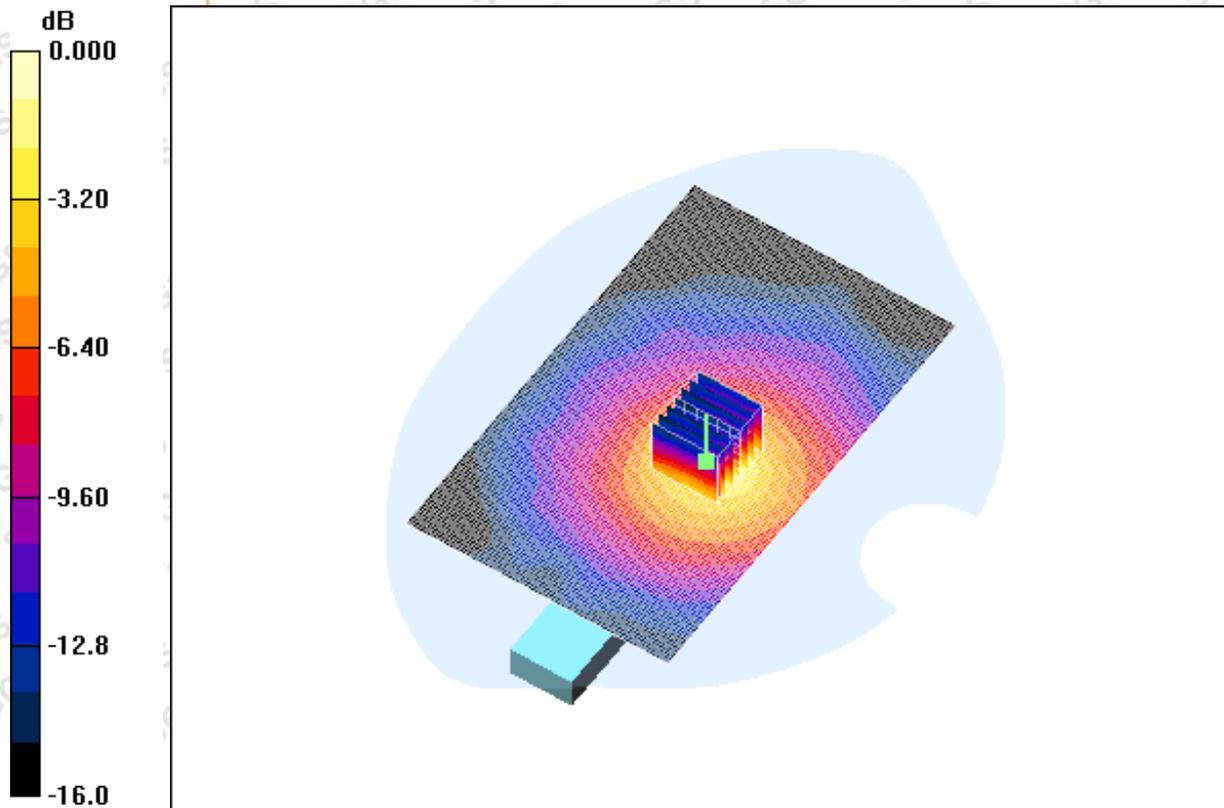

0 dB = 0.063mW/g

4.6 GSM850-Body-Worn-EGPRS-Middle-P1

Date/Time: 2008-9-27 22:43:34

Test Laboratory: SGS-GSM

GSM850-Body-Worn-EDGE-Mid-P1 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

Communication System: GSM850-EGPRS Mode; Frequency: 836.4 MHz; Duty Cycle: 1:2

Medium: HSL900-Body Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.81, 5.81, 5.81); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle P1-2/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.719 mW/g

Body Worn - Middle P1-2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 7.07 V/m; Power Drift = -0.092 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.618 mW/g; SAR(10 g) = 0.389 mW/g

Maximum value of SAR (measured) = 0.669 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

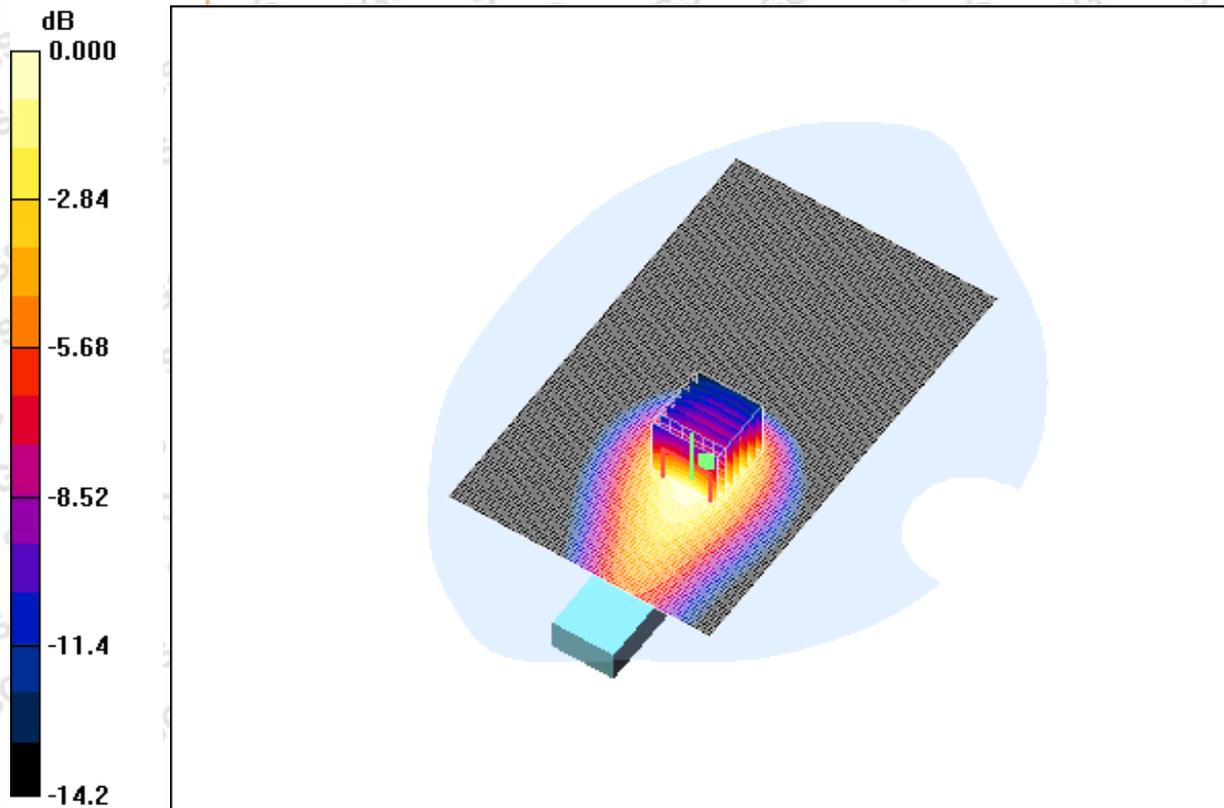

0 dB = 0.669mW/g

4.7 GSM850-Body-Worn-EGPRS-Middle-P2

Date/Time: 2008-9-27 21:47:13

Test Laboratory: SGS-GSM

GSM850-Body-Worn-EDGE-Mid-P2 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Communication System: GSM850-EGPRS Mode; Frequency: 836.4 MHz; Duty Cycle: 1:2

Medium: HSL900-Body Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.81, 5.81, 5.81); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle P2-2/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.927 mW/g

Body Worn - Middle P2-2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 7.61 V/m; Power Drift = -0.192 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.761 mW/g; SAR(10 g) = 0.480 mW/g

Maximum value of SAR (measured) = 0.828 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

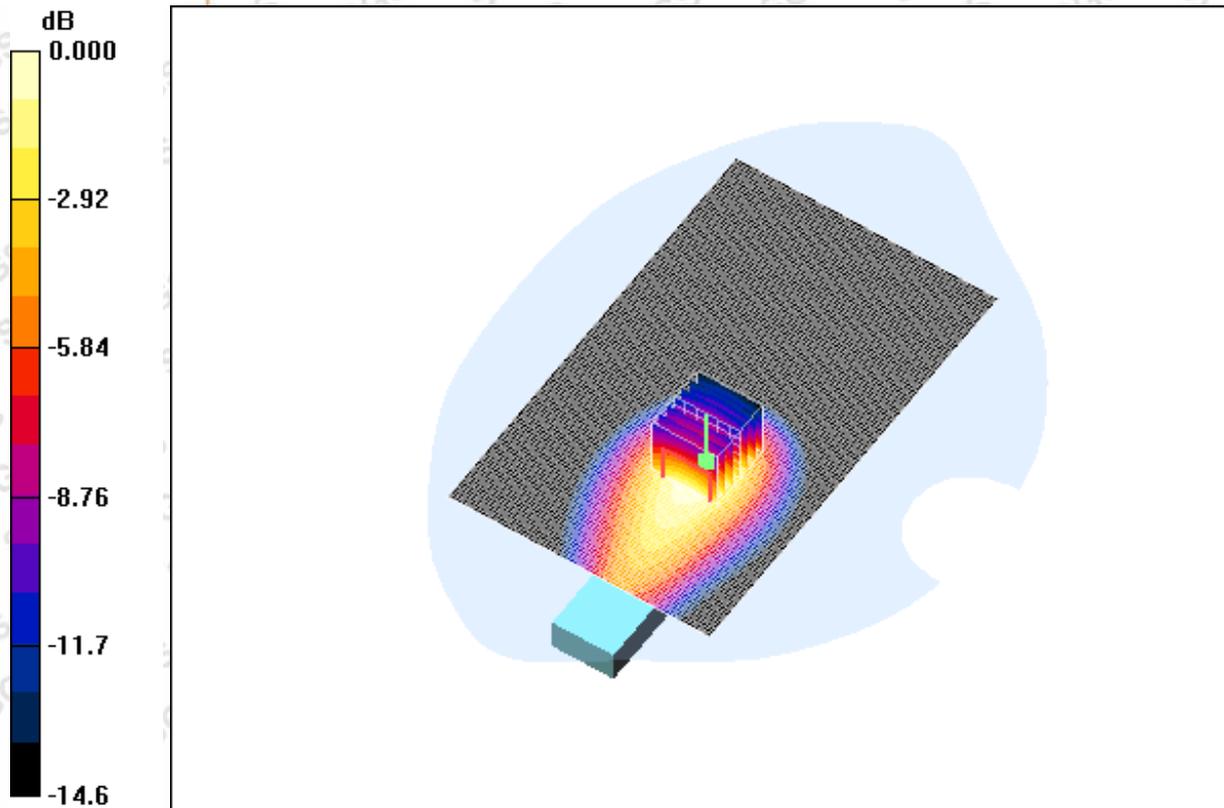

0 dB = 0.828mW/g

4.8 GSM850-Body-Worn-EGPRS-Middle-P3

Blank

4.9 GSM850-Body-Worn-EGPRS-Middle-P4

Blank

4.10 GSM850-Body-Worn-EGPRS-Middle-P5

Blank

4.11 GSM850-Body-Worn-GPRS-Worstcase-Low

Date/Time: 2008-9-27 20:30:19

Test Laboratory: SGS-GSM

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

GSM850-Body-Worn-GPRS-Low-P2 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

Communication System: GSM850-GPRS Mode; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: HSL900-Body Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.958$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.81, 5.81, 5.81); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Low P2-2/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.857 mW/g

Body Worn - Low P2-2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 7.23 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.718 mW/g; SAR(10 g) = 0.453 mW/g

Maximum value of SAR (measured) = 0.774 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

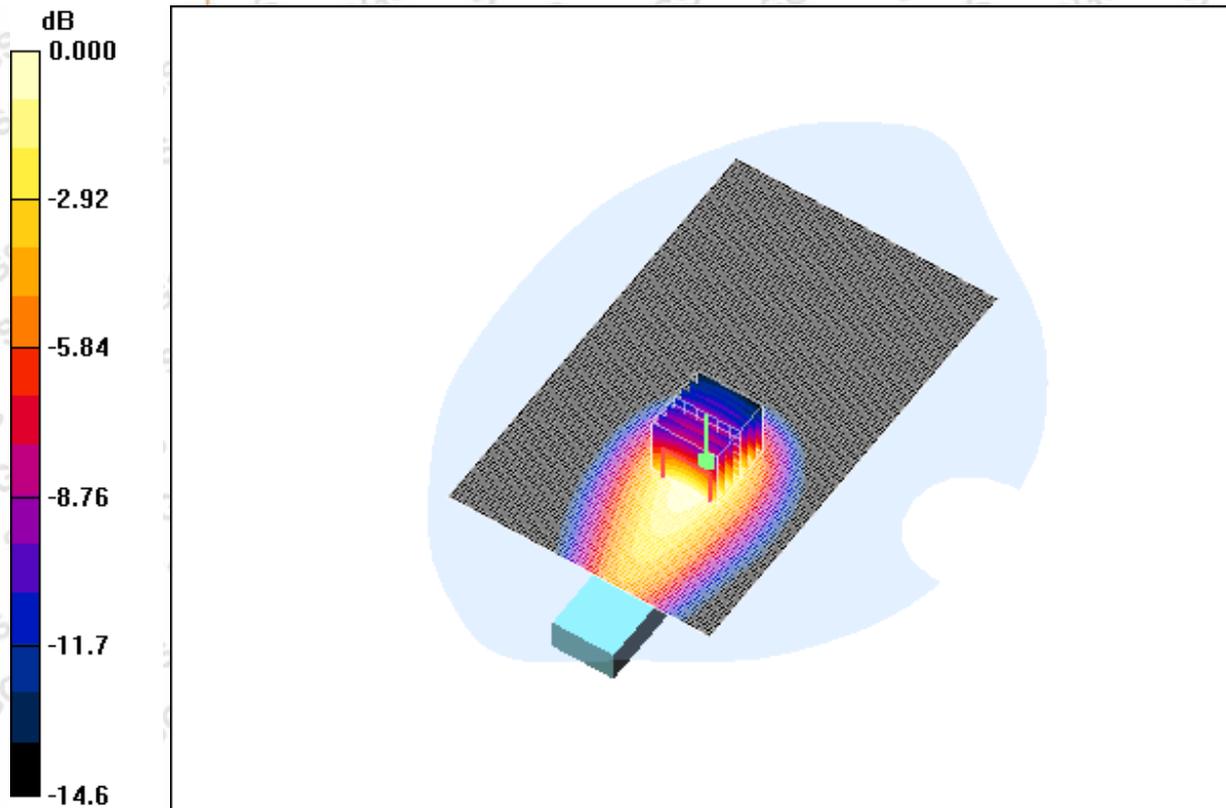

0 dB = 0.774mW/g

4.12GSM850-Body-Worn- GPRS-Worstcase-High

Date/Time: 2008-9-27 19:37:05

Test Laboratory: SGS-GSM

GSM850-Body-Worn-GPRS-High-P2 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Communication System: GSM850-GPRS Mode; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: HSL900-Body Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.81, 5.81, 5.81); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - High P2-2/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.30 mW/g

Body Worn - High P2-2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 8.60 V/m; Power Drift = -0.210 dB

Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.654 mW/g

Maximum value of SAR (measured) = 1.14 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

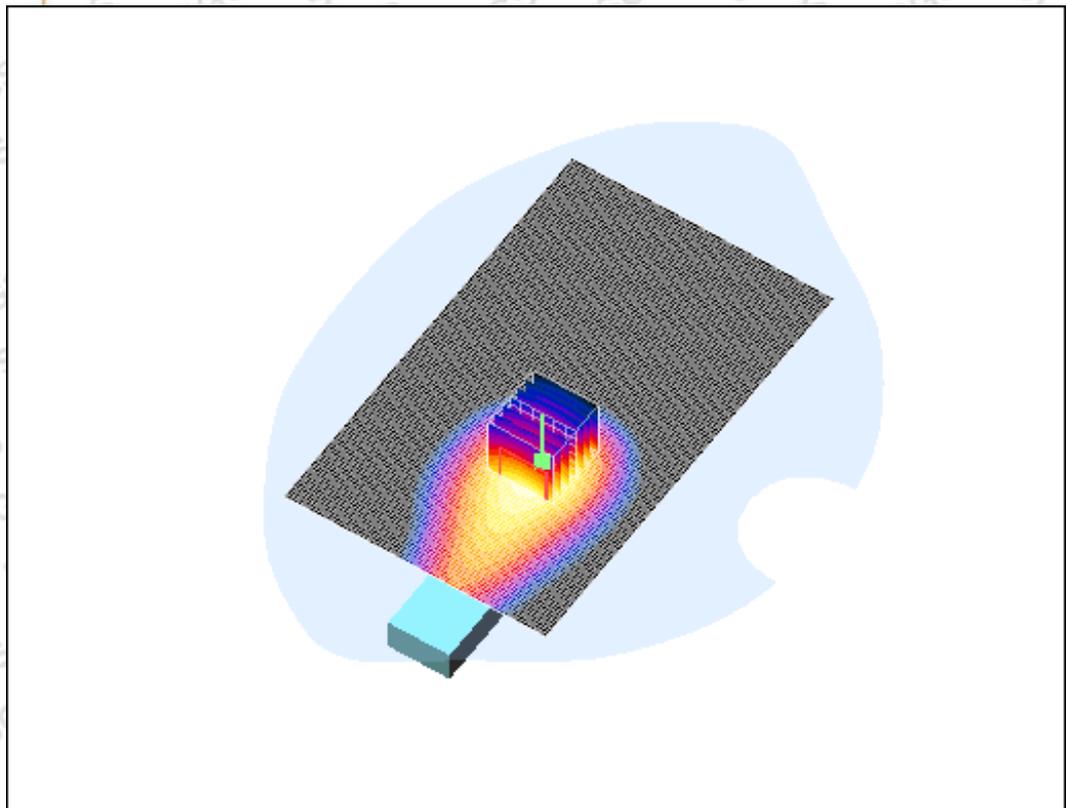

0 dB = 1.14mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

1g/10g Averaged SAR

SAR; Zoom Scan (7x7x7): Value Along Z, X=3, Y=3



GSM850-Body-Worn- GPRS-P2-High 1cm(MAX)

Date/Time: 2008-9-29 11:43:54

Test Laboratory: SGS-GSM

GSM850-Body-Worn-GPRS-High-P2 1cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

Communication System: GSM850-GPRS Mode; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: HSL900-Body Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.81, 5.81, 5.81); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - High P2-10MM/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.612 mW/g

Body Worn - High P2-10MM/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,
dz=5mm



Reference Value = 17.1 V/m; Power Drift = -0.083 dB

Peak SAR (extrapolated) = 0.795 W/kg

SAR(1 g) = 0.536 mW/g; SAR(10 g) = 0.341 mW/g

Maximum value of SAR (measured) = 0.584 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

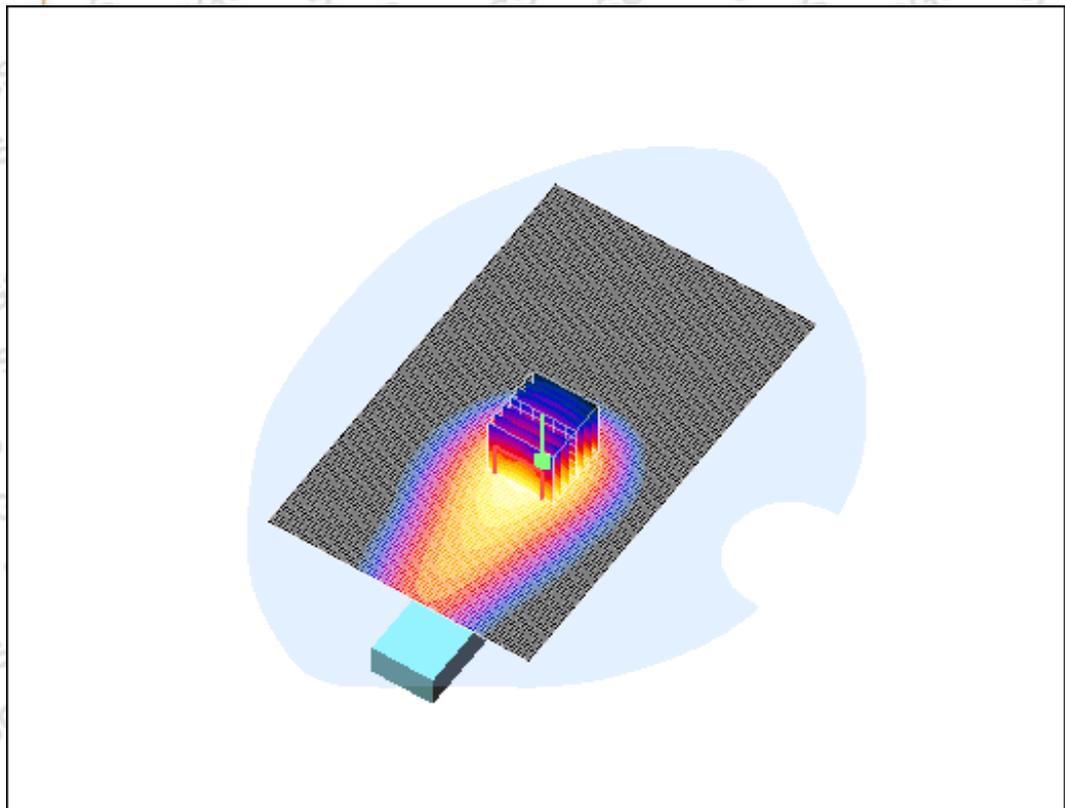

0 dB = 0.584mW/g

GSM850-Body-Worn-EGPRS-Worstcase-Low

Blank

GSM850-Body-Worn- EGPRS-Worstcase-High

Blank

GSM1900

4.13 GSM1900-Body-Worn-GPRS-Middle-P1

Blank

4.14GSM1900-Body-Worn-GPRS-Middle-P2

Date/Time: 2008-9-30 17:04:06

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

Test Laboratory: SGS-GSM

PCS1900-Body-Worn--GPRS-Mid-P2 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

Communication System: PCS1900-GPRS Mode; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: HSL1900_Body Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle p 2/Area Scan (81x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.785 mW/g

Body Worn - Middle p 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 3.86 V/m; Power Drift = 0.200 dB

Peak SAR (extrapolated) = 1.40 W/kg

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SAR(1 g) = 0.759 mW/g; SAR(10 g) = 0.397 mW/g

Maximum value of SAR (measured) = 0.833 mW/g

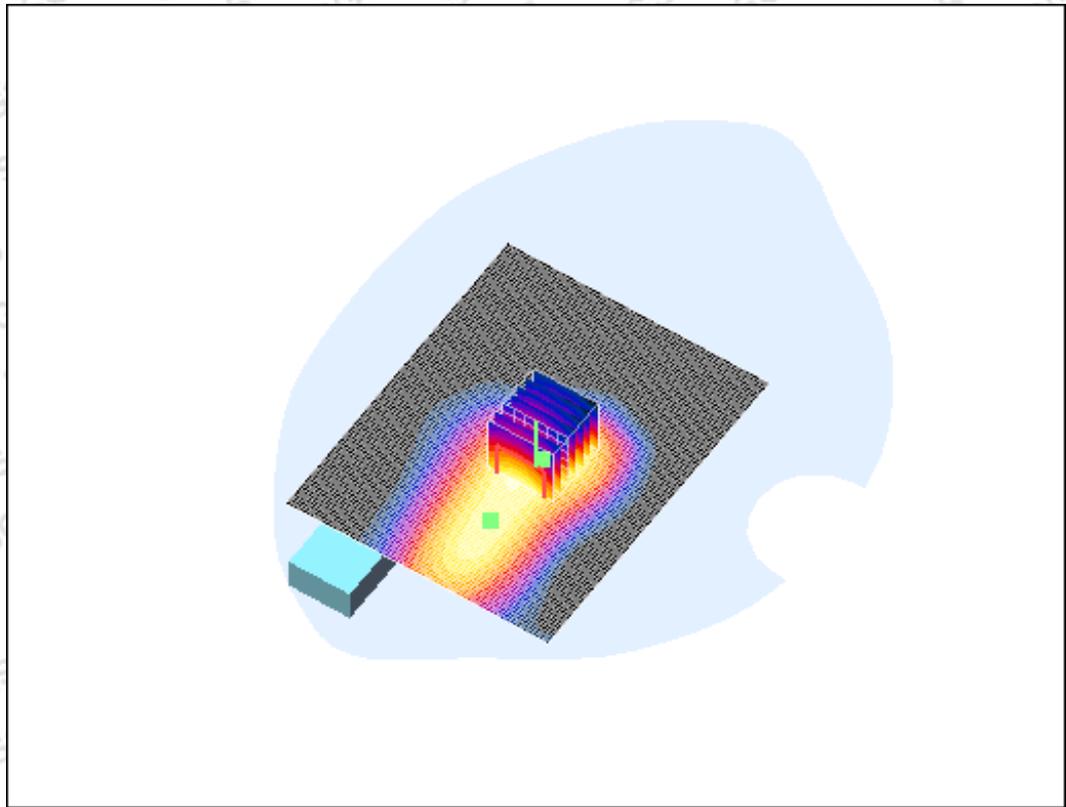

0 dB = 0.833mW/g

4.15 GSM1900-Body-Worn-GPRS-Middle-P3

Blank

4.16 GSM1900-Body-Worn-GPRS-Middle-P4

Blank

4.17 GSM1900-Body-Worn- GPRS -Middle-P5

Blank

4.18 GSM1900-Body-Worn-EGPRS-Middle-P1

Date/Time: 2008-10-1 10:07:52

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Test Laboratory: SGS-GSM

PCS1900-Body-Worn-EDGE-Mid-P1 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

Communication System: PCS1900-EGPRS Mode; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium: HSL1900_Body Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle p 1/Area Scan (81x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.877 mW/g

Body Worn - Middle p 1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 20.3 V/m; Power Drift = 0.123 dB

Peak SAR (extrapolated) = 1.46 W/kg

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SAR(1 g) = 0.735 mW/g; SAR(10 g) = 0.381 mW/g

Maximum value of SAR (measured) = 0.805 mW/g

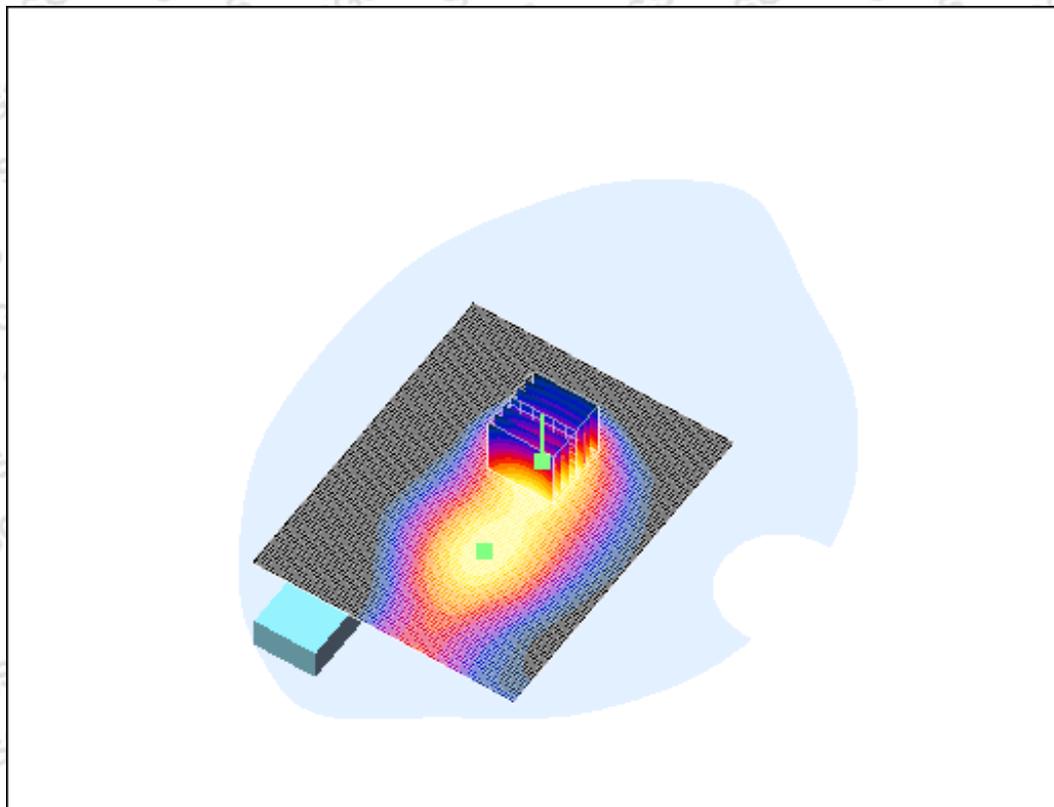

0 dB = 0.805mW/g

4.19 GSM1900-Body-Worn-EGPRS-Middle-P2

Date/Time: 2008-9-30 15:53:48

Test Laboratory: SGS-GSM

PCS1900-Body-Worn--EDGE-Mid-P2 0.5cm

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

DUT: KZ017AK01; Type: Body; Serial: 20080616

Communication System: PCS1900-EGPRS Mode; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium: HSL1900_Body Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle p2/Area Scan (81x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.894 mW/g

Body Worn - Middle p2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 4.18 V/m; Power Drift = -0.105 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.802 mW/g; SAR(10 g) = 0.425 mW/g

Maximum value of SAR (measured) = 0.912 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

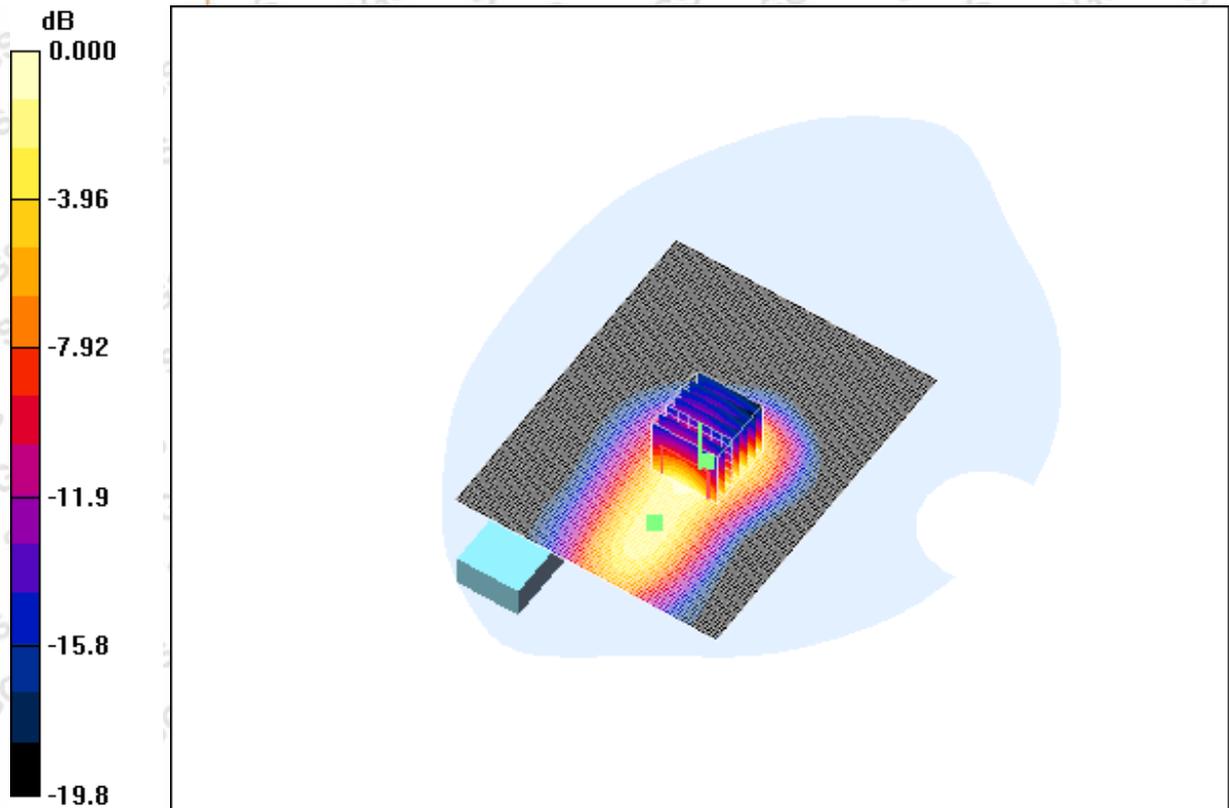

0 dB = 0.912mW/g

4.20 GSM1900-Body-Worn-EGPRS-Middle-P3

Date/Time: 2008-10-1 7:53:21

Test Laboratory: SGS-GSM

PCS1900-Body-Worn--EDGE-Mid-P3 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

Communication System: PCS1900-EGPRS Mode; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium: HSL1900_Body Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle p3/Area Scan (81x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.542 mW/g

Body Worn - Middle p3/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 15.5 V/m; Power Drift = -0.240 dB

Peak SAR (extrapolated) = 0.971 W/kg

SAR(1 g) = 0.455 mW/g; SAR(10 g) = 0.209 mW/g

Maximum value of SAR (measured) = 0.517 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

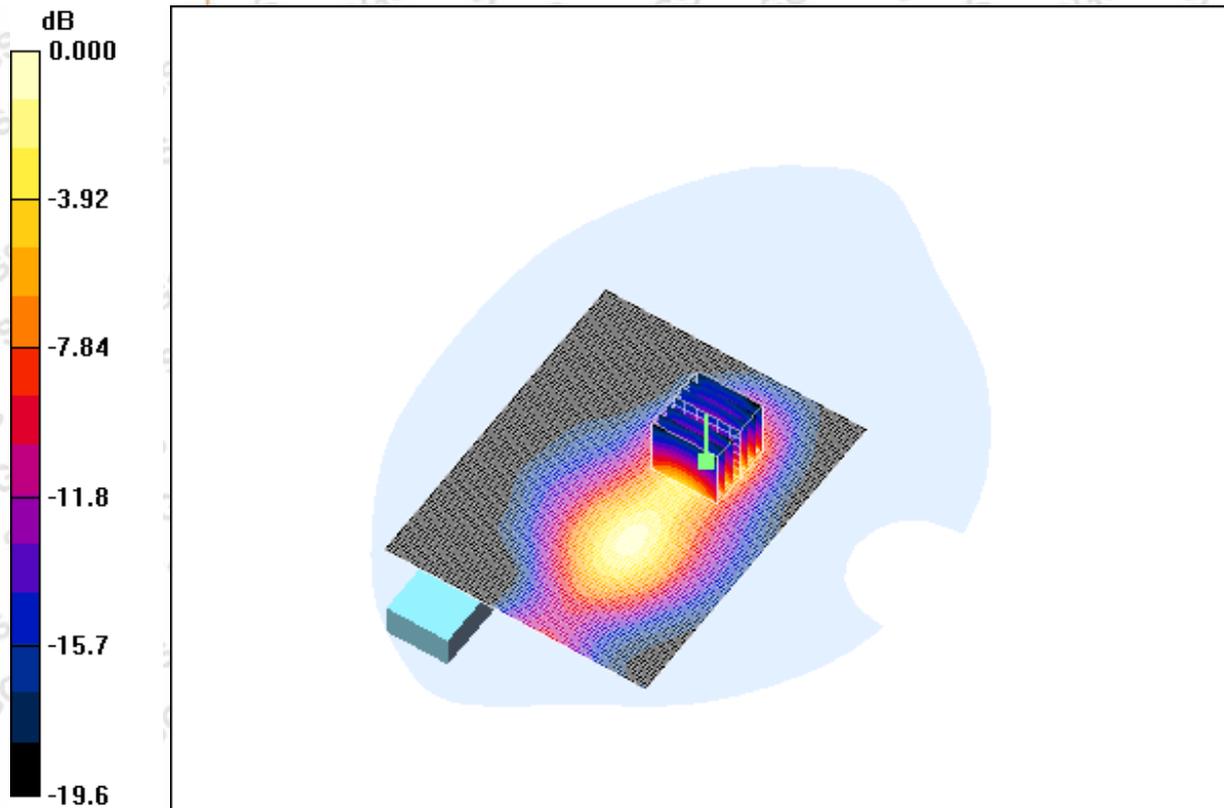

0 dB = 0.517mW/g

4.21 GSM1900-Body-Worn-EGPRS-Middle-P4

Date/Time: 2008-10-1 8:22:45

Test Laboratory: SGS-GSM

PCS1900-Body-Worn--EDGE-Mid-P4 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Communication System: PCS1900-EGPRS Mode; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium: HSL1900_Body Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle p4/Area Scan (81x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.602 mW/g

Body Worn - Middle p4/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 7.42 V/m; Power Drift = -0.268 dB

Peak SAR (extrapolated) = 0.981 W/kg

SAR(1 g) = 0.527 mW/g; SAR(10 g) = 0.281 mW/g

Maximum value of SAR (measured) = 0.590 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

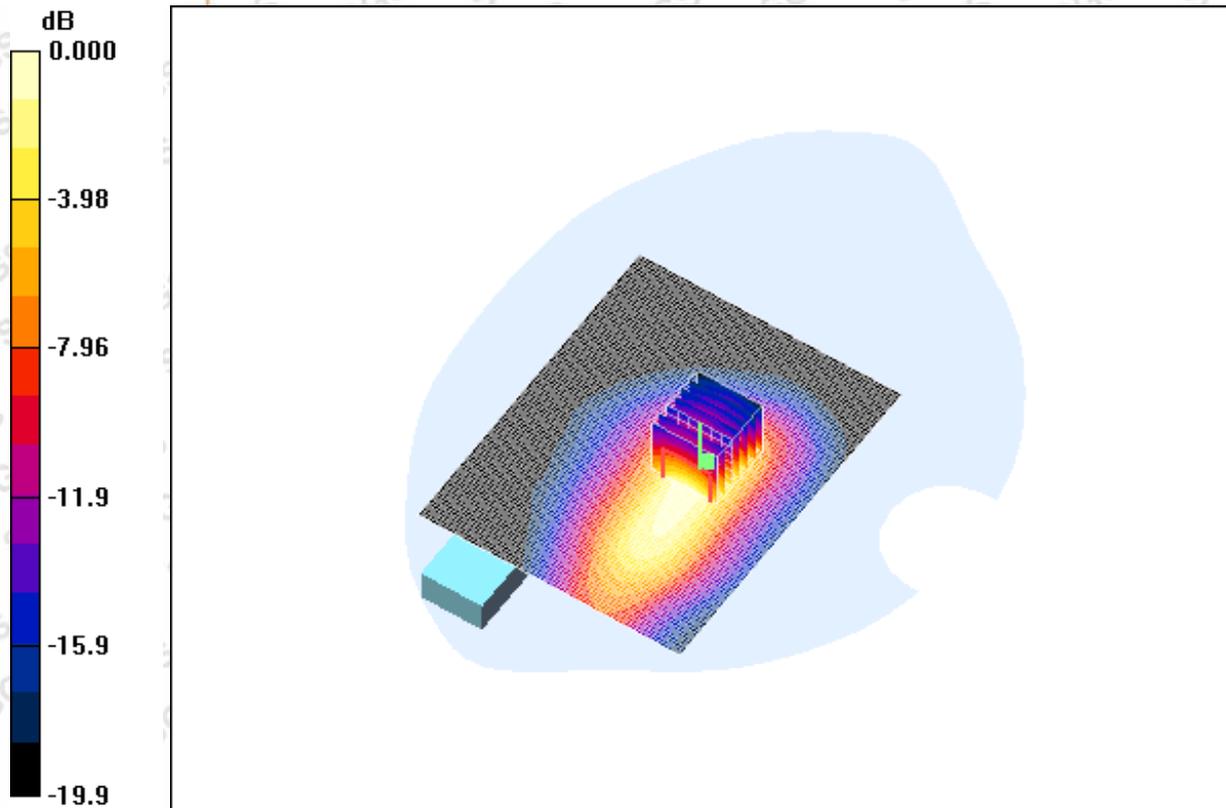

0 dB = 0.590mW/g

4.22 GSM1900-Body-Worn-EGPRS-Middle-P5

Date/Time: 2008-10-21 18:09:11

Test Laboratory: SGS-GSM

PCS1900-Body-Worn--EGPRS--P5 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Communication System: PCS1900-EGPRS Mode; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium: HSL1900-Body Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle p5 2/Area Scan (81x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.200 mW/g

Body Worn - Middle p5 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 8.50 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.304 W/kg

SAR(1 g) = 0.187 mW/g; SAR(10 g) = 0.111 mW/g

Maximum value of SAR (measured) = 0.204 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

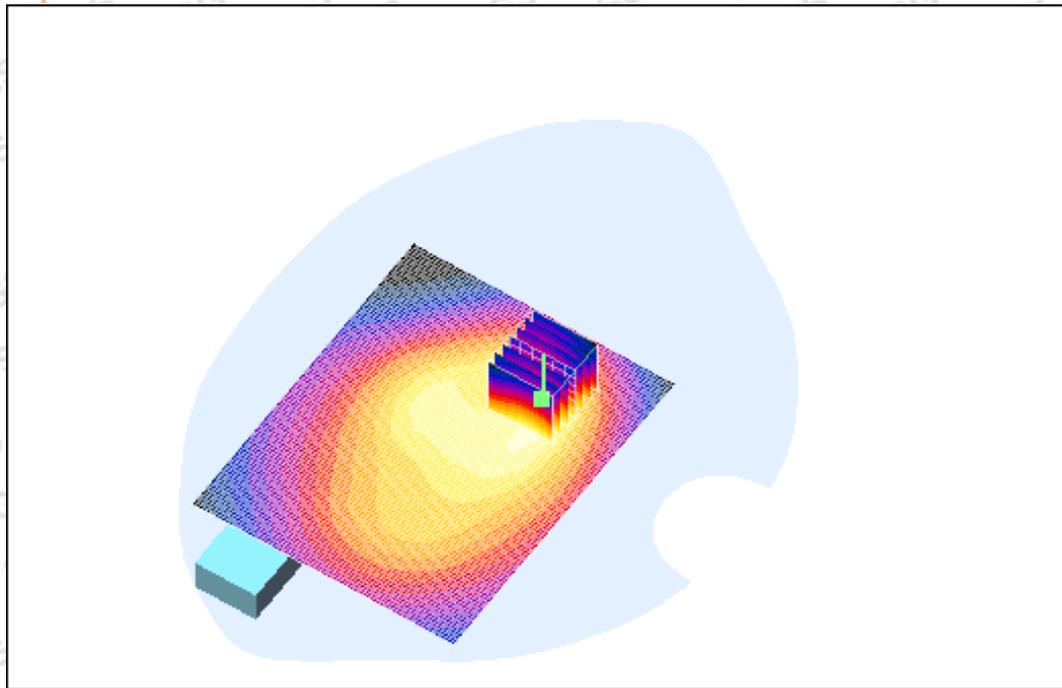

0 dB = 0.204mW/g

4.23 GSM1900-Body-Worn-GPRS-Worstcase-Low

Blank

4.24 GSM1900-Body-Worn- GPRS- Worstcase-High

Blank

GSM1900-Body-Worn- EGPRS- Worstcase-Low

Date/Time: 2008-9-30 14:45:52

Test Laboratory: SGS-GSM

PCS1900-Body-Worn--EDGE-Low-P2 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

Communication System: PCS1900-EGPRS Mode; Frequency: 1850.2 MHz; Duty Cycle: 1:2

Medium: HSL1900_Body Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Low p2/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.980 mW/g

Body Worn - Low p2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 4.34 V/m; Power Drift = 0.064 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.877 mW/g; SAR(10 g) = 0.462 mW/g


Maximum value of SAR (measured) = 0.982 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

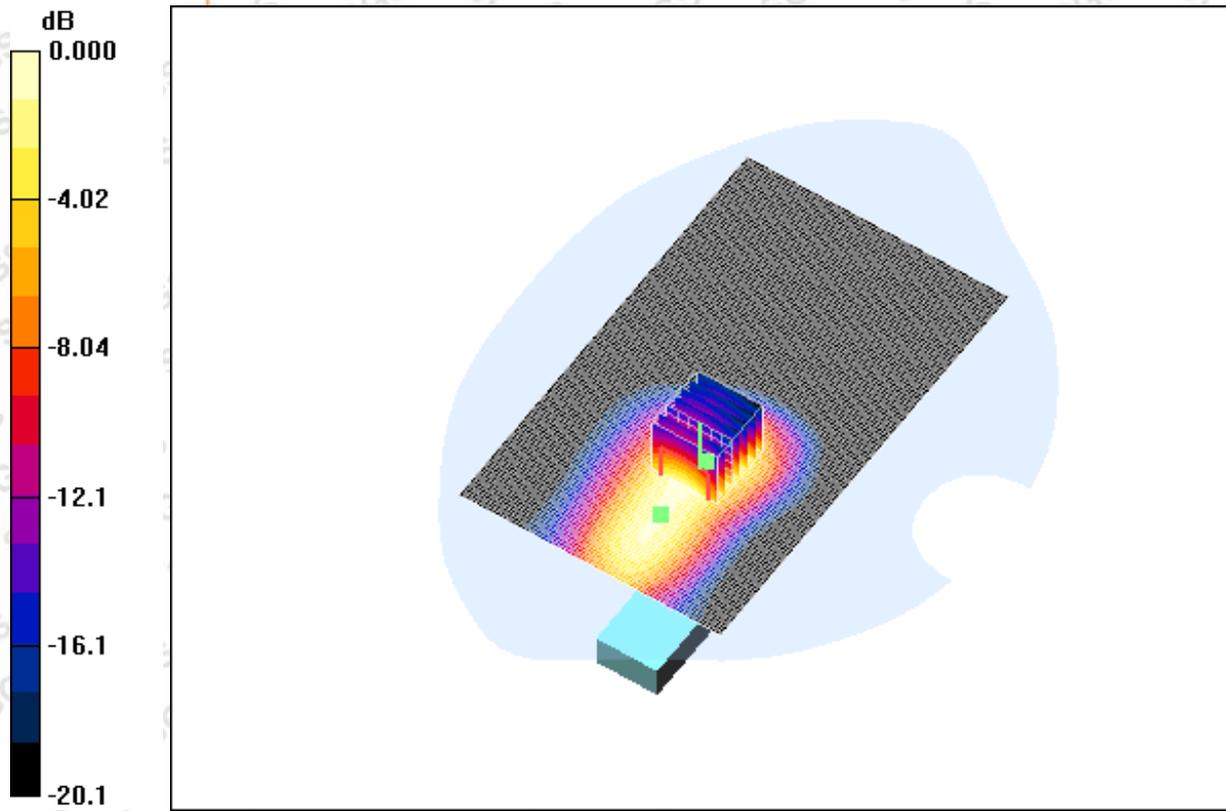

0 dB = 0.982mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

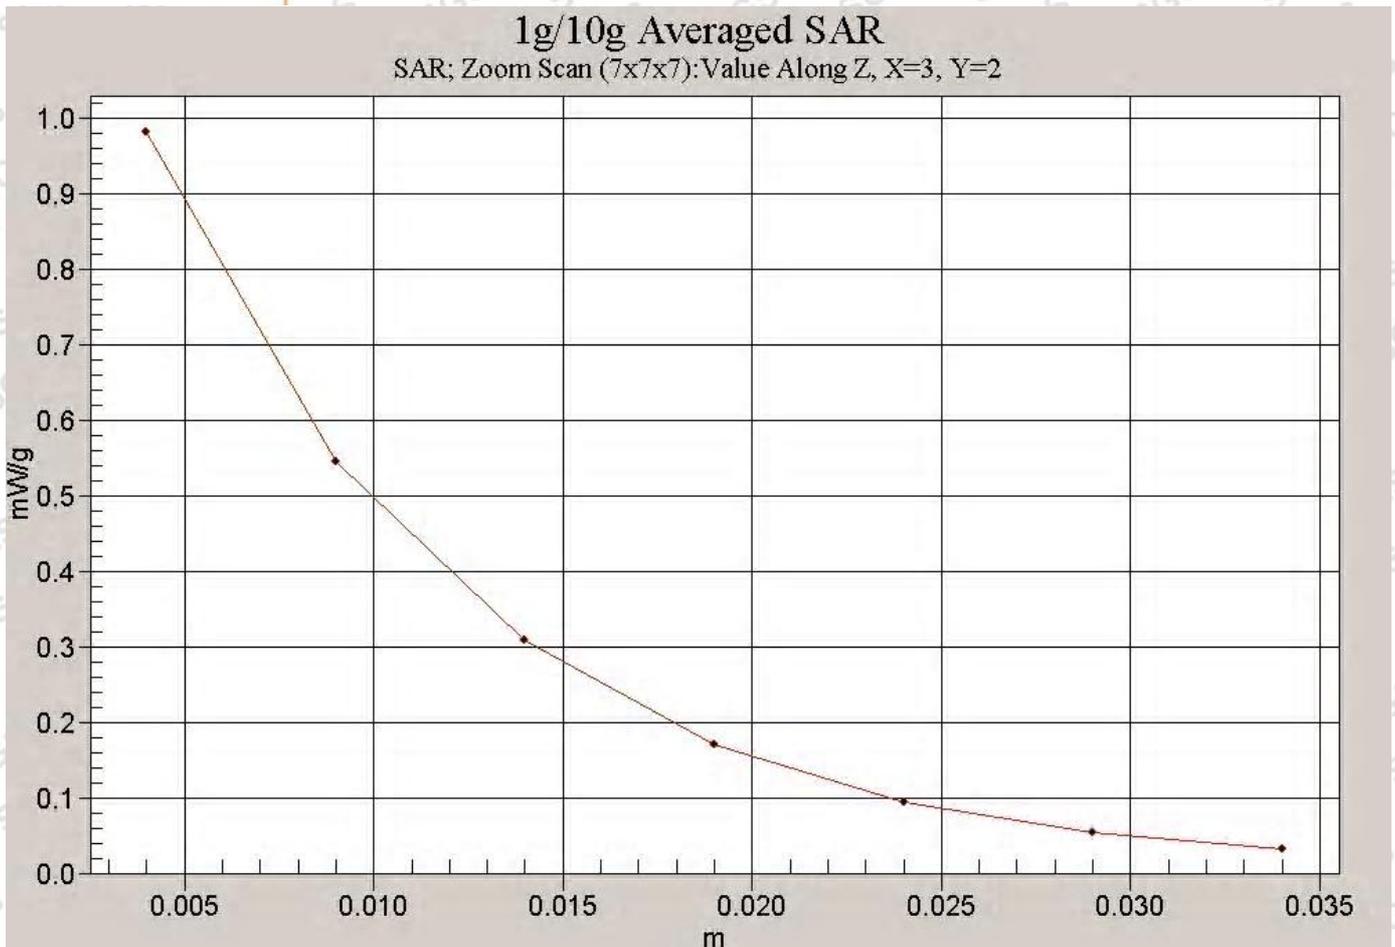

GSM1900-Body-Worn-EGPRS-Low-P2-1cm

Date/Time: 2008-9-30 17:32:11

Test Laboratory: SGS-GSM

PCS1900-Body-Worn--EDGE-Low-P2 1cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Communication System: PCS1900-EGPRS Mode; Frequency: 1850.2 MHz; Duty Cycle: 1:2

Medium: HSL1900_Body Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Low p2 10cm/Area Scan (81x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.460 mW/g

Body Worn - Low p2 10cm/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,
dz=5mm


Reference Value = 5.28 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 0.747 W/kg

SAR(1 g) = 0.428 mW/g; SAR(10 g) = 0.242 mW/g

Maximum value of SAR (measured) = 0.474 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

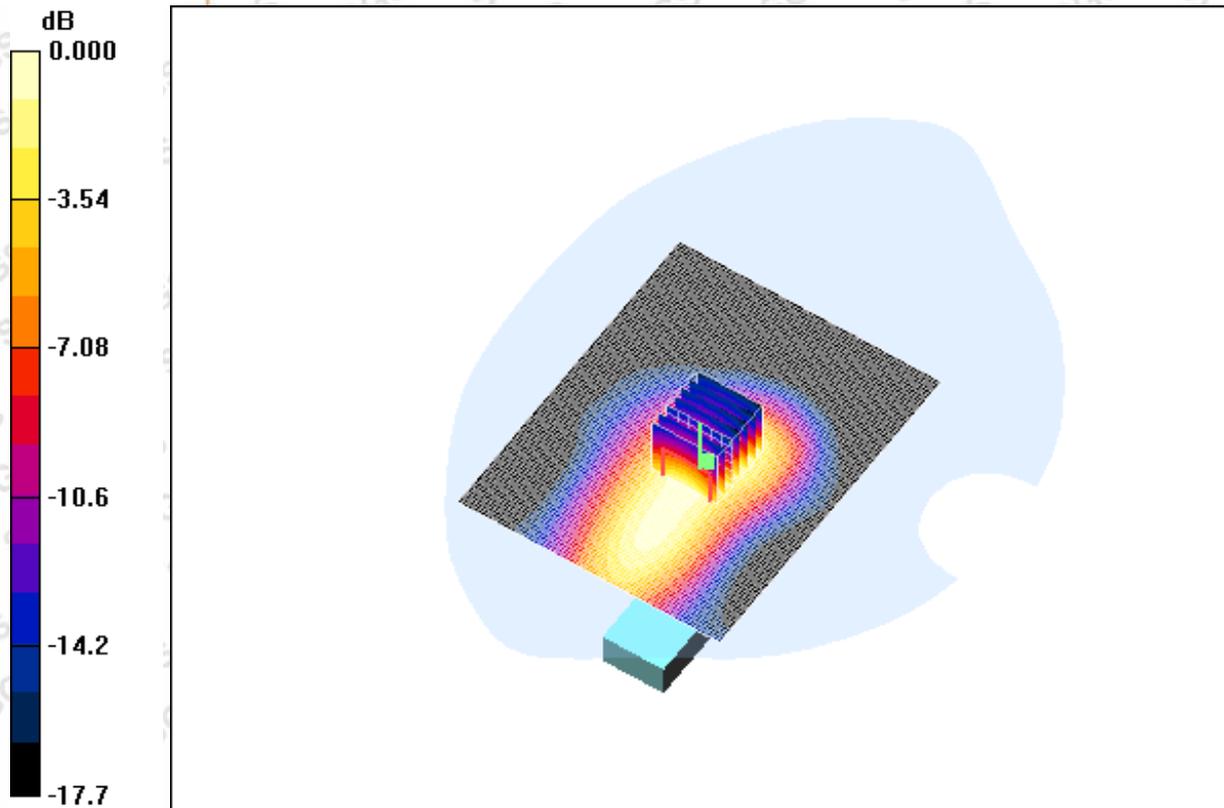

0 dB = 0.474mW/g

GSM1900-Body-Worn- EGPRS- Worstcase-High

Date/Time: 2008-9-30 16:16:08

Test Laboratory: SGS-GSM

PCS1900-Body-Worn--EDGE-High-P2 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

Communication System: PCS1900-EGPRS Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:2

Medium: HSL1900_Body Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.6$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - High p2/Area Scan (81x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.862 mW/g

Body Worn - High p2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 4.10 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.782 mW/g; SAR(10 g) = 0.398 mW/g

Maximum value of SAR (measured) = 0.876 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

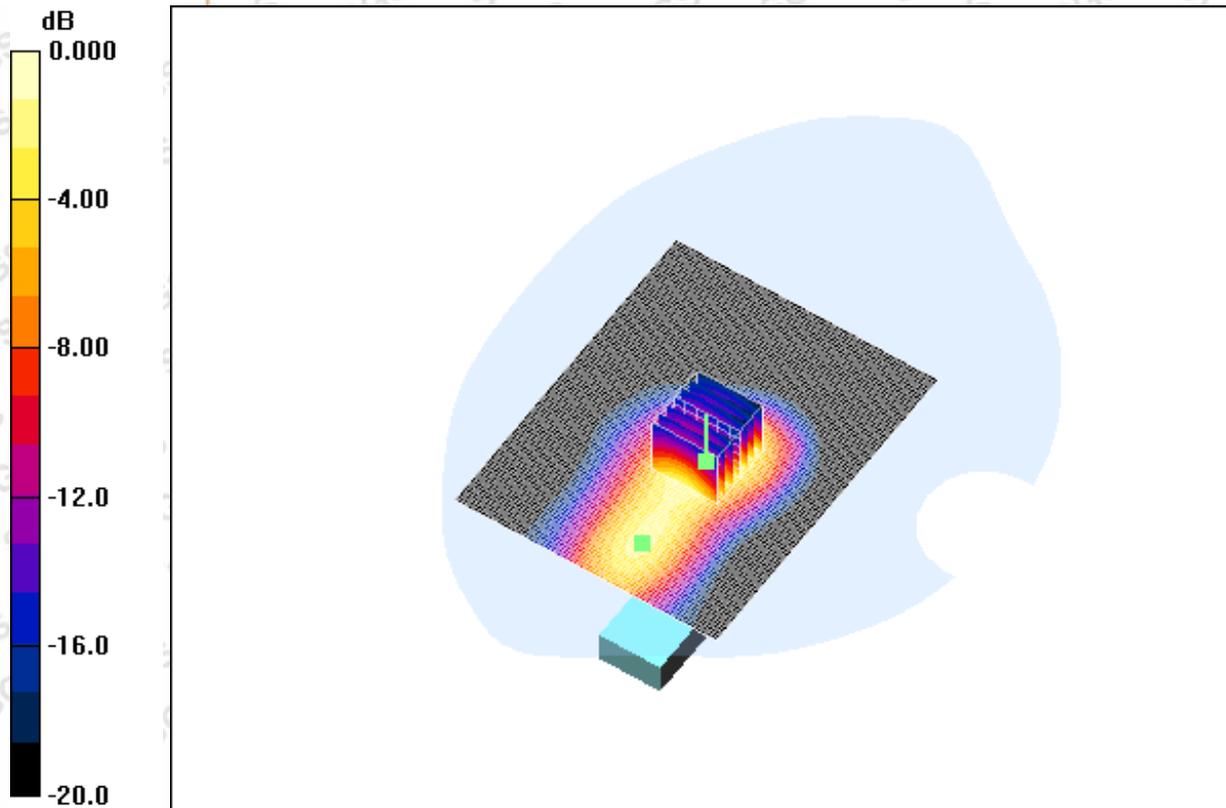

0 dB = 0.876mW/g

WCDMA Band V

4.25 WCDMA850-Body-Worn-WCDMA-Middle-P1

Date/Time: 2008-9-28 15:11:43

Test Laboratory: SGS-GSM

W850-Body-Worn-WCDMA-Mid-P1 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

Communication System: WCDMA Band V ; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL900-Body Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.81, 5.81, 5.81); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle P1/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.538 mW/g

Body Worn - Middle P1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 22.6 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 0.860 W/kg

SAR(1 g) = 0.462 mW/g; SAR(10 g) = 0.291 mW/g

Maximum value of SAR (measured) = 0.501 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

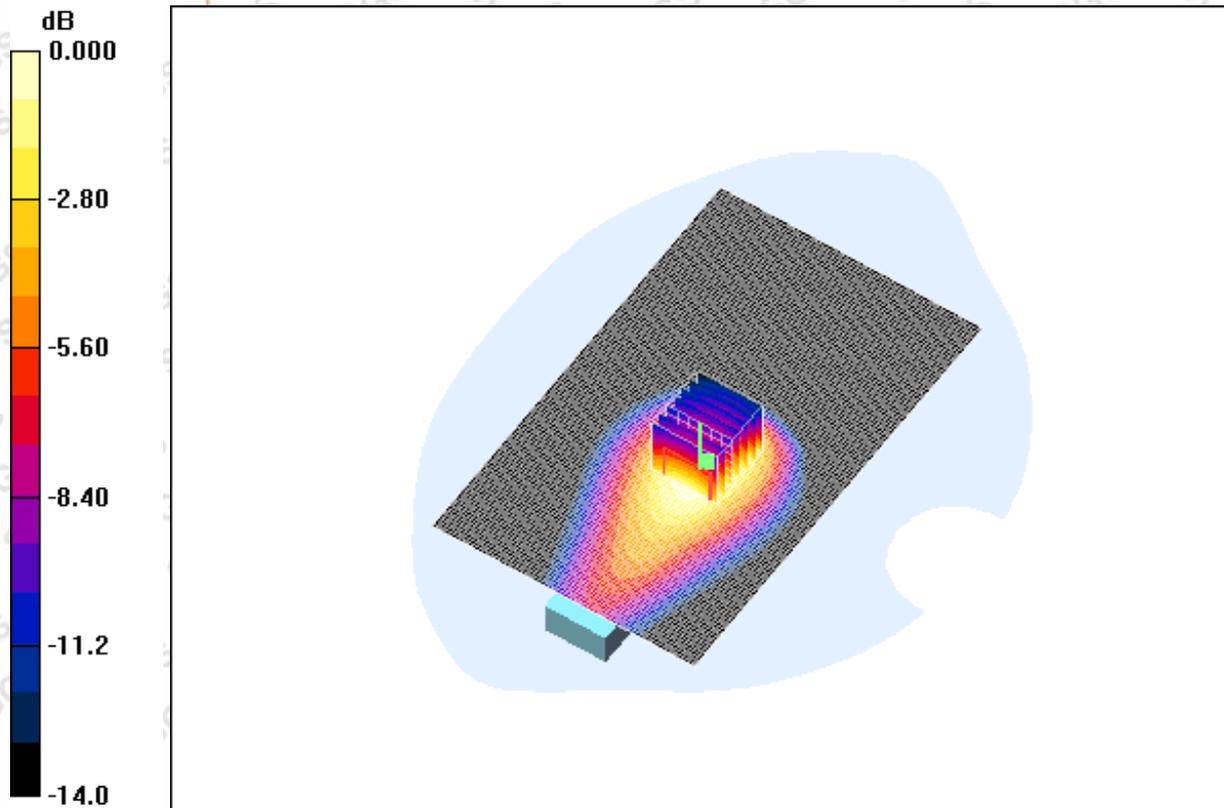

0 dB = 0.501mW/g

4.26 WCDMA 850-Body-Worn-WCDMA-Middle-P2

Date/Time: 2008-9-28 15:40:05

Test Laboratory: SGS-GSM

W850-Body-Worn-WCDMA-Mid-P2 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Communication System: WCDMA Band V ; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL900-Body Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.81, 5.81, 5.81); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle P2/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.572 mW/g

Body Worn - Middle P2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 19.5 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 0.856 W/kg

SAR(1 g) = 0.475 mW/g; SAR(10 g) = 0.292 mW/g

Maximum value of SAR (measured) = 0.517 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

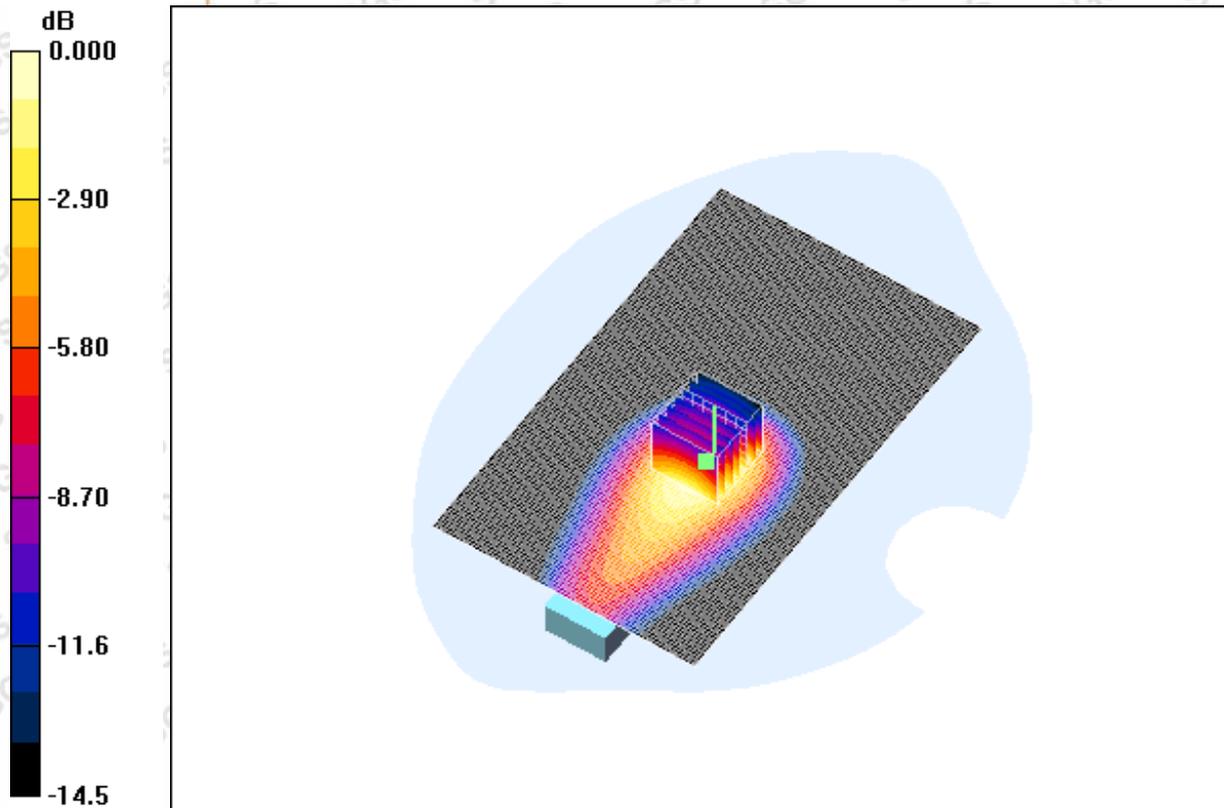

0 dB = 0.517mW/g

4.27 WCDMA 850-Body-Worn-WCDMA-Middle-P3

Date/Time: 2008-9-28 21:38:24

Test Laboratory: SGS-GSM

W850-Body-Worn-WCDMA-Mid-P3 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Communication System: WCDMA Band V ; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL900-Body Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.81, 5.81, 5.81); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle P 3/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.092 mW/g

Body Worn - Middle P 3/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 9.38 V/m; Power Drift = -0.141 dB

Peak SAR (extrapolated) = 0.151 W/kg

SAR(1 g) = 0.086 mW/g; SAR(10 g) = 0.052 mW/g

Maximum value of SAR (measured) = 0.094 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

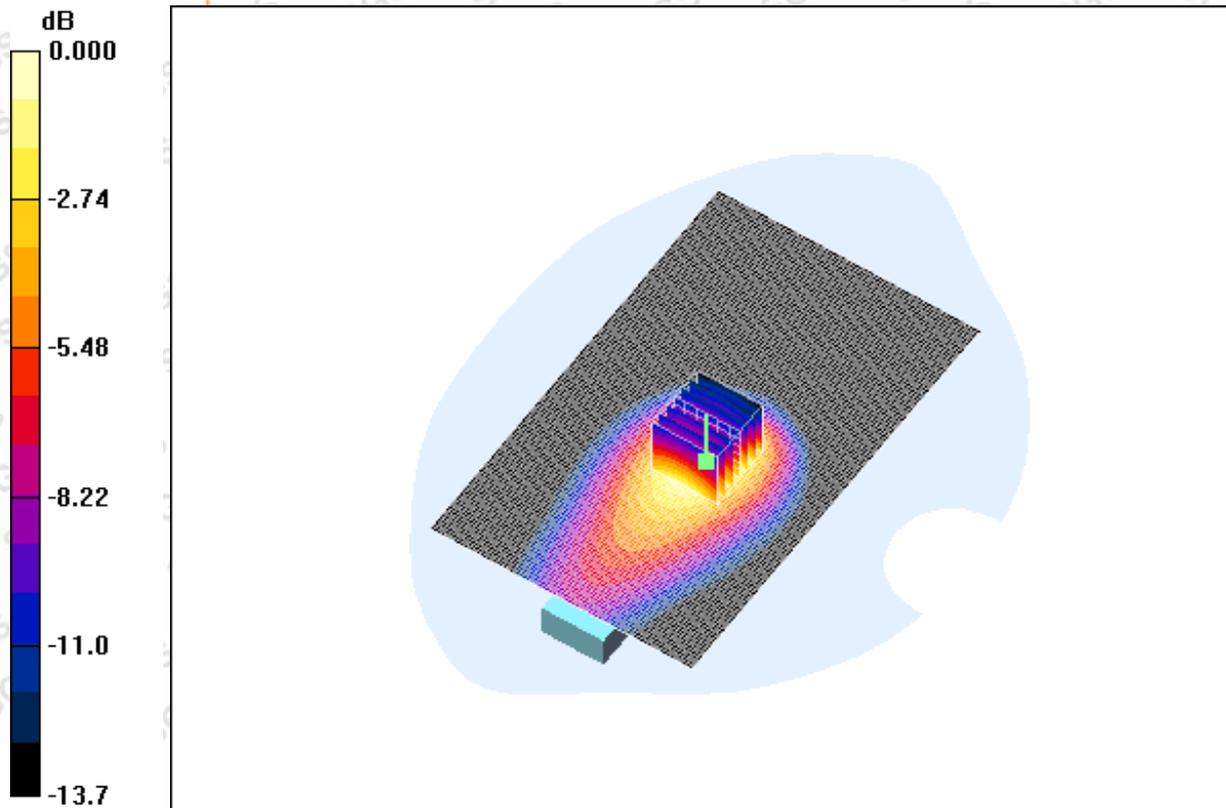

0 dB = 0.094mW/g

4.28 WCDMA 850-Body-Worn-WCDMA-Middle-P4

Date/Time: 2008-9-28 21:08:48

Test Laboratory: SGS-GSM

W850-Body-Worn-WCDMA-Mid-P4 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Communication System: WCDMA Band V ; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL900-Body Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.81, 5.81, 5.81); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle P4/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.219 mW/g

Body Worn - Middle P4/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 14.4 V/m; Power Drift = 0.217 dB

Peak SAR (extrapolated) = 0.375 W/kg

SAR(1 g) = 0.189 mW/g; SAR(10 g) = 0.119 mW/g

Maximum value of SAR (measured) = 0.203 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

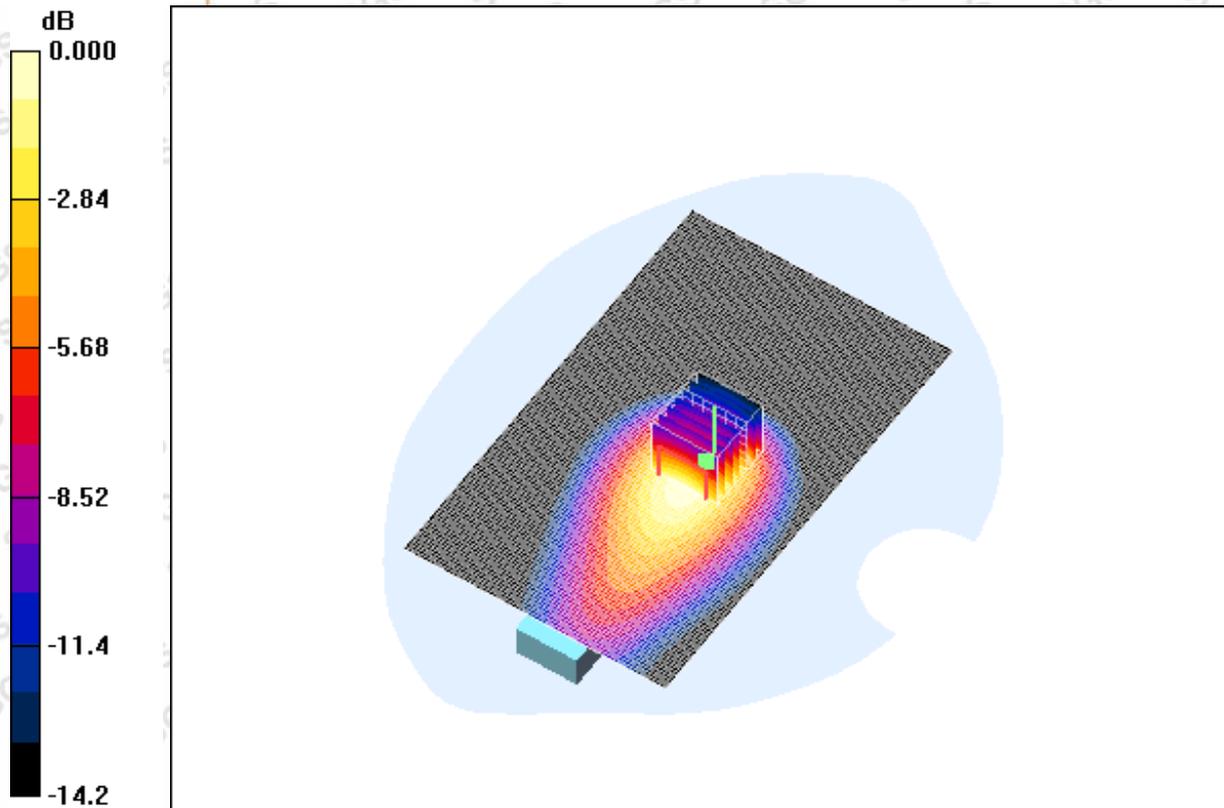

0 dB = 0.203mW/g

4.29 WCDMA 850-Body-Worn-WCDMA-Middle-P5

Date/Time: 2008-9-28 22:09:15

Test Laboratory: SGS-GSM

W850-Body-Worn-WCDMA-Mid-P5 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Communication System: WCDMA Band V ; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL900-Body Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.81, 5.81, 5.81); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle P5/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.039 mW/g

Body Worn - Middle P5/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 6.93 V/m; Power Drift = 0.082 dB

Peak SAR (extrapolated) = 0.091 W/kg

SAR(1 g) = 0.042 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.046 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

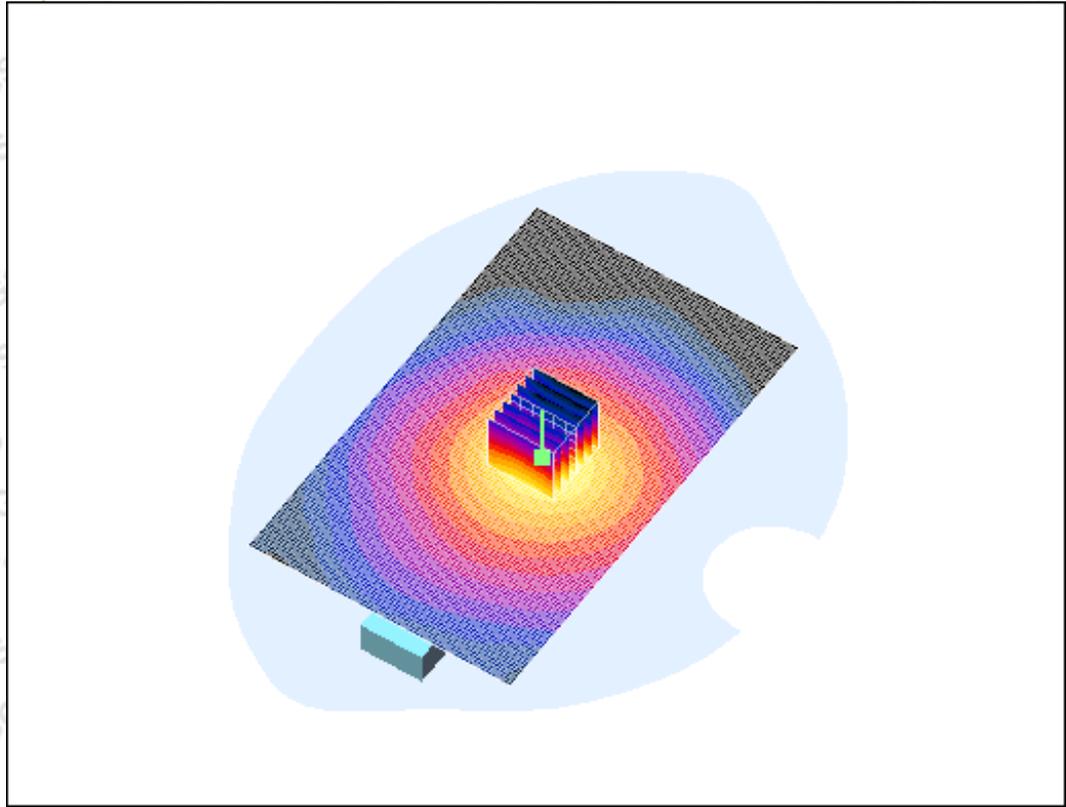

0 dB = 0.046mW/g

4.30 WCDMA850-Body-Worn-HSPA-Middle-P1

Blank

4.31 WCDMA 850-Body-Worn-HSPA-Middle-P2

Blank

4.32 WCDMA 850-Body-Worn-HSPA-Middle-P3

Blank

4.33 WCDMA 850-Body-Worn-HSPA-Middle-P4

Blank

4.34 WCDMA 850-Body-Worn-HSPA-Middle-P5

Blank

4.35 WCDMA 850-Body-Worn-WCDMA-Worstcase-Low

Blank

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

4.36 WCDMA 850-Body-Worn- WCDMA-Worstcase-High
Blank

WCDMA 850-Body-Worn-HSPA- HSDPA-Worstcase-Low
Blank

WCDMA 850-Body-Worn-HSPA- HSDPA-Worstcase-High
Blank

4.37 WCDMA 1900-Body-Worn-WCDMA-Middle-P1

Date/Time: 2008-9-29 16:50:15

Test Laboratory: SGS-GSM

W1900-Body-Worn-WCDMA-Mid-P1 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

Communication System: WCDMA Band II ; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900_Body Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle P1/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Maximum value of SAR (interpolated) = 1.25 mW/g


Body Worn - Middle P1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.5 V/m; Power Drift = -0.155 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.872 mW/g; SAR(10 g) = 0.447 mW/g

Maximum value of SAR (measured) = 0.971 mW/g

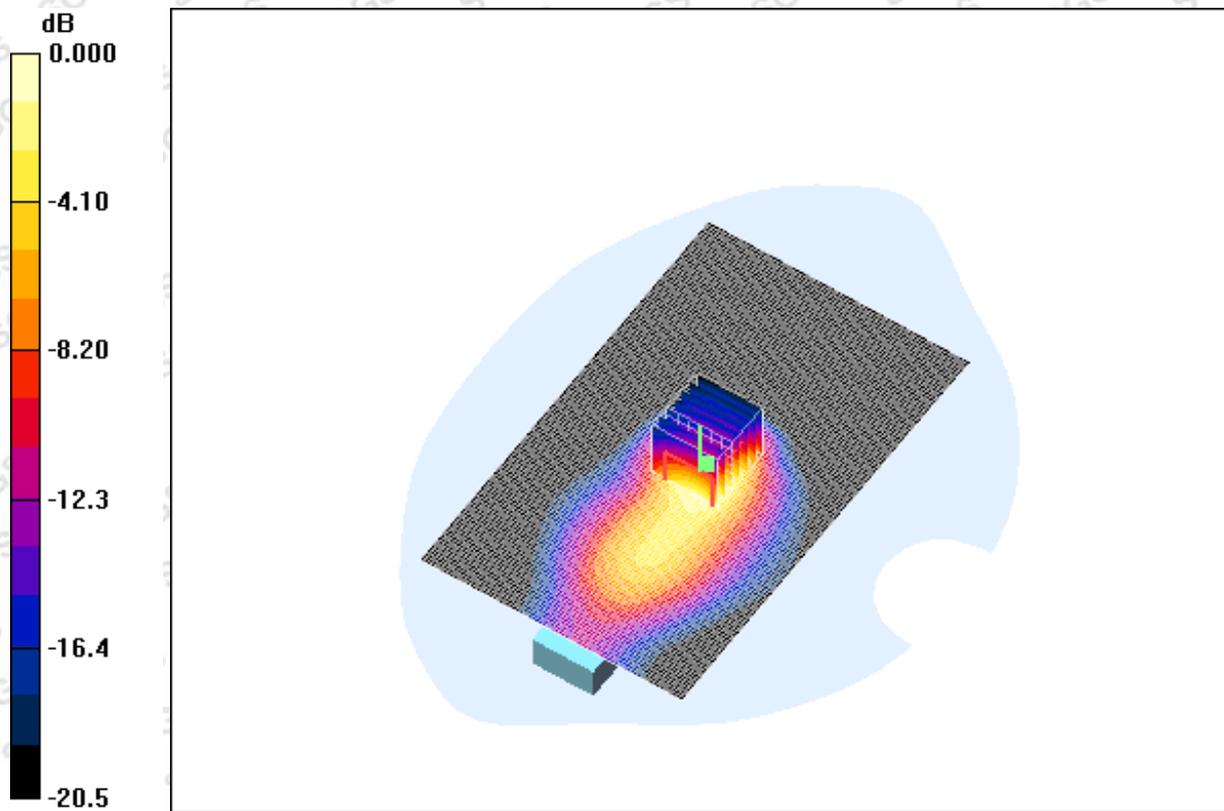

0 dB = 0.971mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

4.38 WCDMA 1900-Body-Worn-WCDMA-Middle-P2

Date/Time: 2008-9-29 14:47:05

Test Laboratory: SGS-GSM

W1900-Body-Worn-WCDMA-Mid-P2 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

Communication System: WCDMA Band II ; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900_Body Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle P2/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.16 mW/g

Body Worn - Middle P2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 19.8 V/m; Power Drift = -0.329 dB

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 0.997 mW/g; SAR(10 g) = 0.518 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

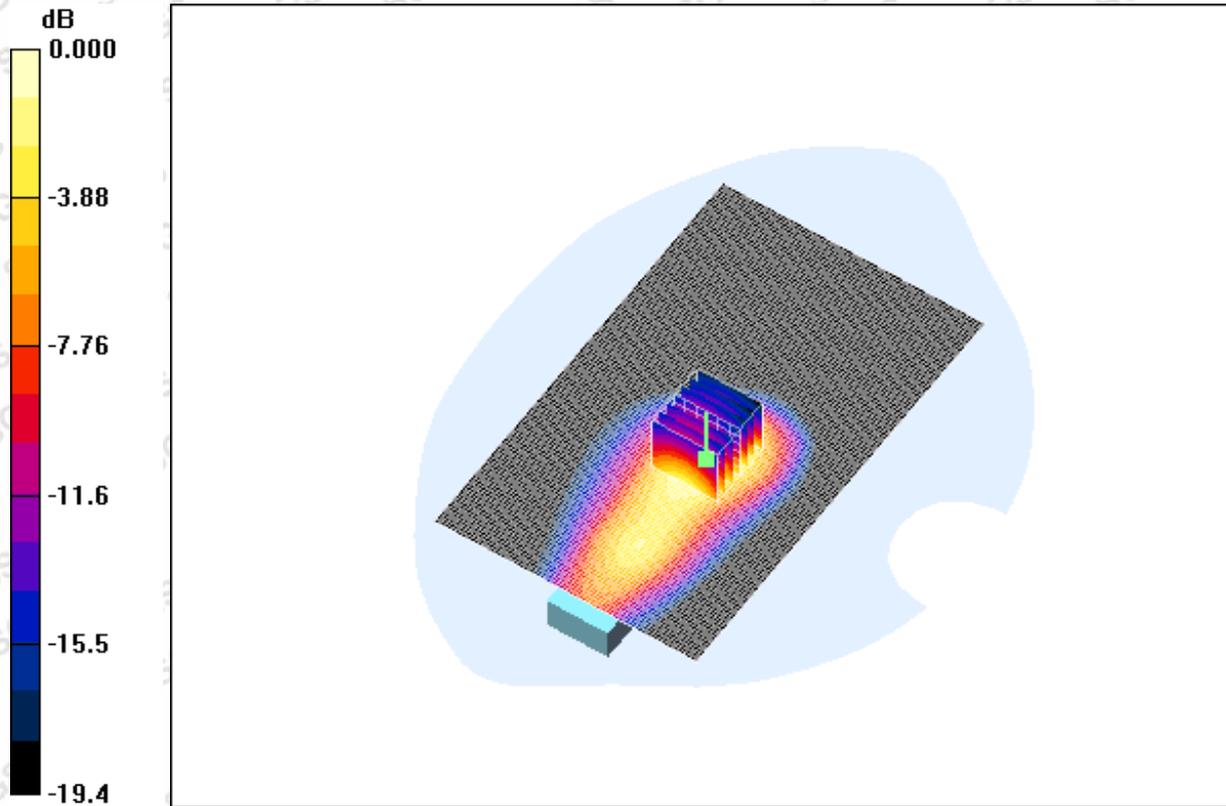


0 dB = 1.11mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

1g/10g Averaged SAR

SAR; Zoom Scan: Value Along Z, X=3, Y=3

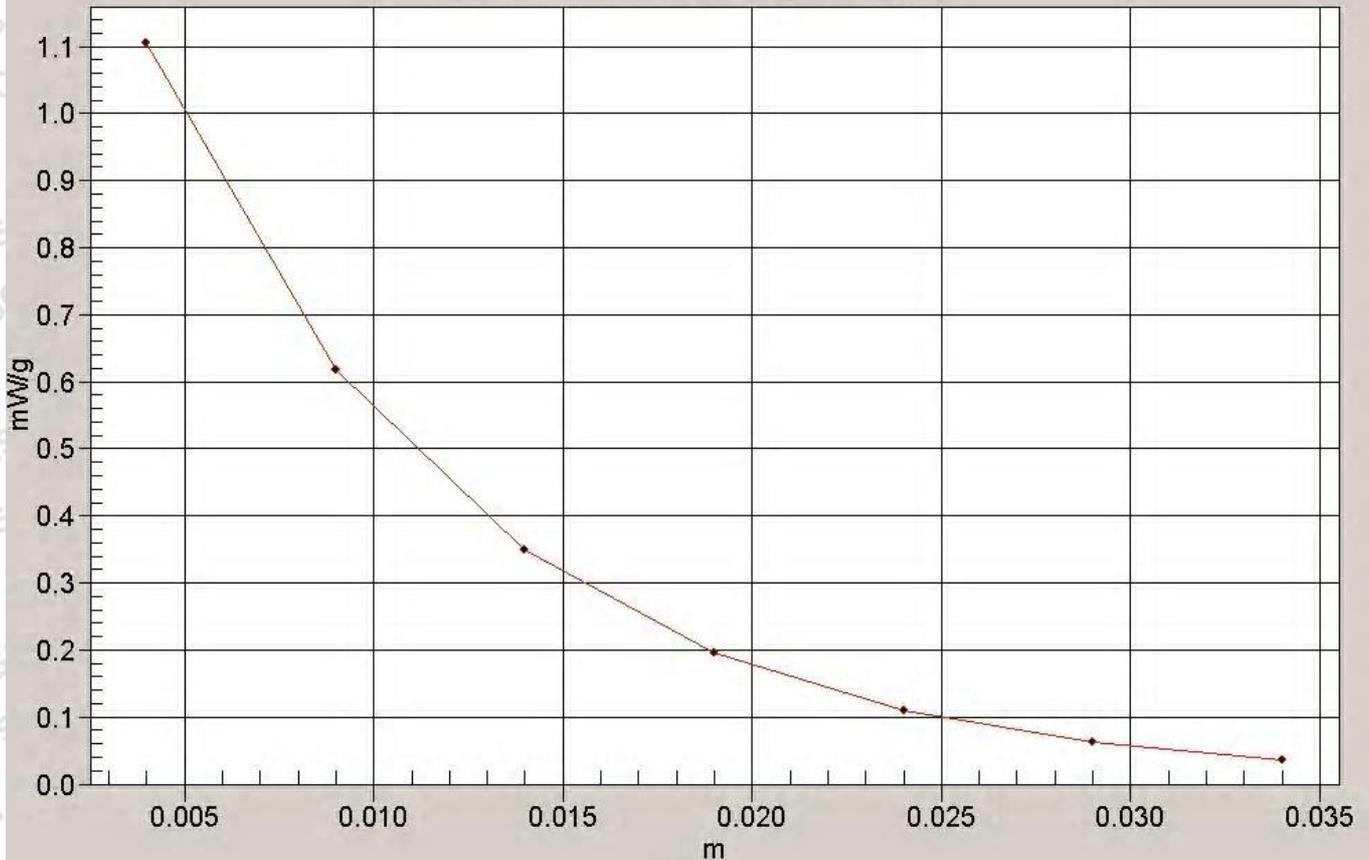

WCDMA 1900-Body-Worn-WCDMA-Middle-P2 1cm

Date/Time: 2008-9-29 16:21:48

Test Laboratory: SGS-GSM

W1900-Body-Worn-WCDMA-Mid-P2 1cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Communication System: WCDMA Band II ; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900_Body Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle P2 10MM/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.446 mW/g

Body Worn - Middle P2 10MM/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 14.0 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 0.698 W/kg

SAR(1 g) = 0.412 mW/g; SAR(10 g) = 0.233 mW/g

Maximum value of SAR (measured) = 0.455 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

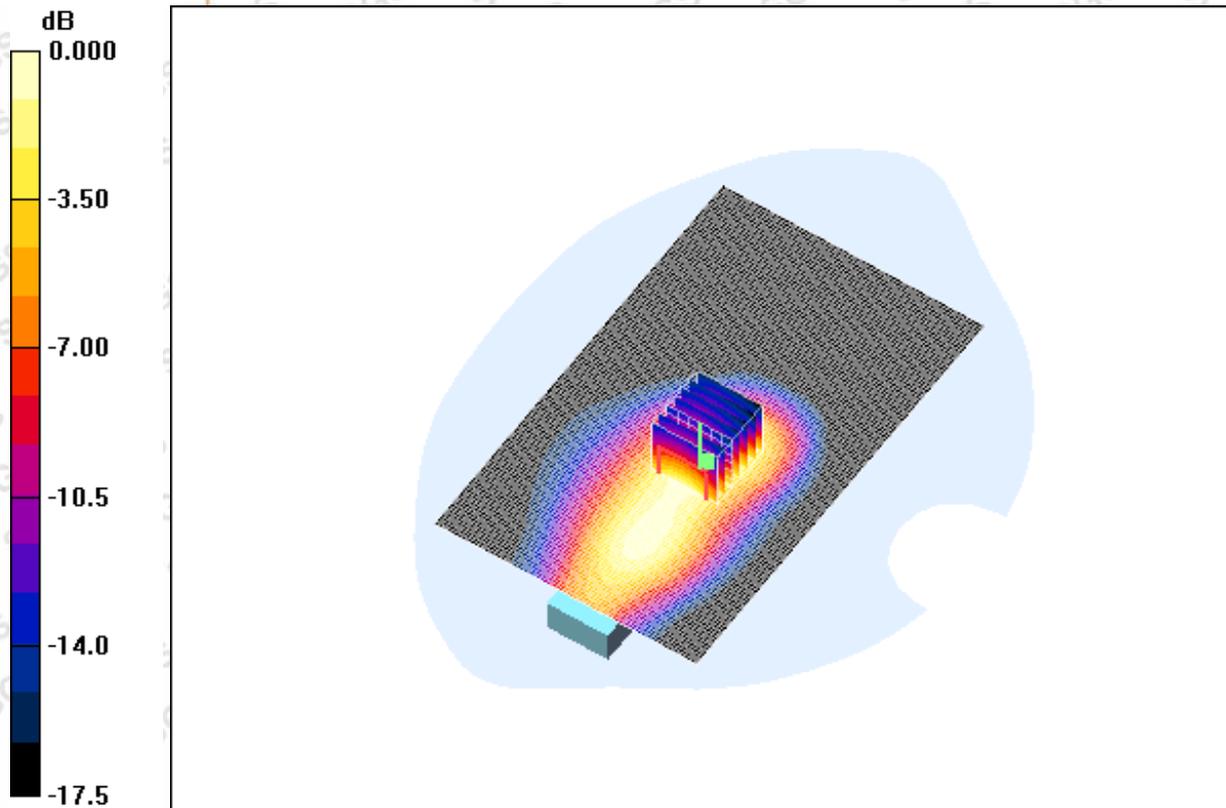

0 dB = 0.455mW/g

4.39 WCDMA 1900-Body-Worn-WCDMA-Middle-P3

Date/Time: 2008-9-29 18:20:44

Test Laboratory: SGS-GSM

W1900-Body-Worn-WCDMA-Mid-P3 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Communication System: WCDMA Band II ; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900_Body Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle P3/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.693 mW/g

Body Worn - Middle P3/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 18.1 V/m; Power Drift = 0.056 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.595 mW/g; SAR(10 g) = 0.274 mW/g

Maximum value of SAR (measured) = 0.681 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

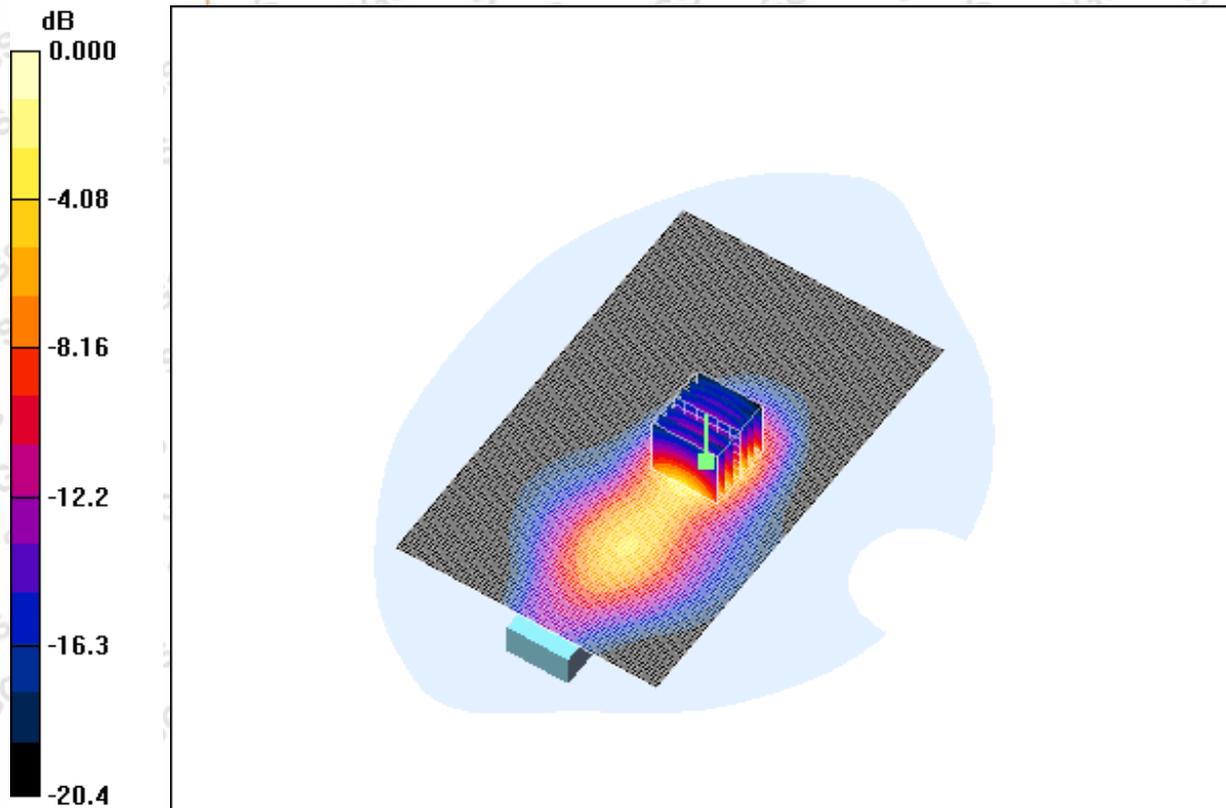

0 dB = 0.681mW/g

4.40 WCDMA 1900-Body-Worn-WCDMA-Middle-P4

Date/Time: 2008-9-29 20:48:20

Test Laboratory: SGS-GSM

W1900-Body-Worn-WCDMA-Mid-P4 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Communication System: WCDMA Band II ; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900_Body Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle P4/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.652 mW/g

Body Worn - Middle P4/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 18.5 V/m; Power Drift = 0.079 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.593 mW/g; SAR(10 g) = 0.313 mW/g

Maximum value of SAR (measured) = 0.661 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

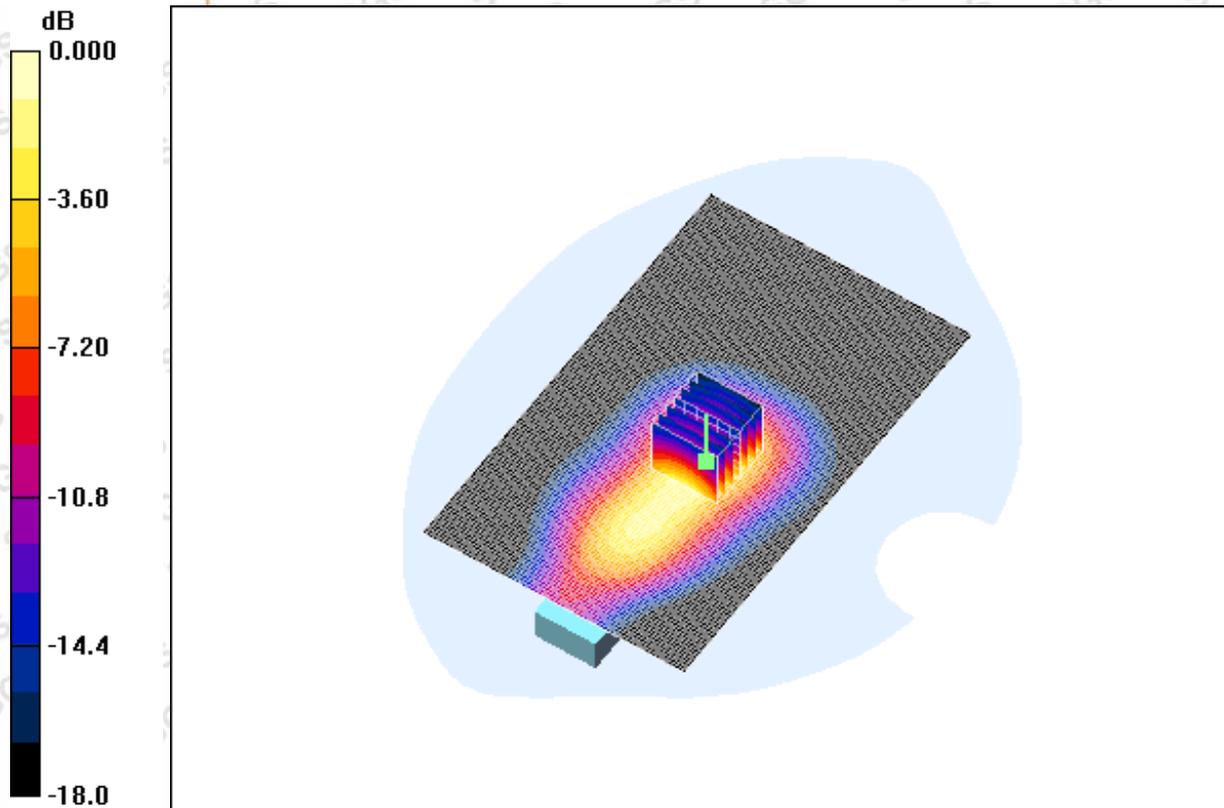

0 dB = 0.661mW/g

4.41 WCDMA 1900-Body-Worn-WCDMA-Middle-P5

Date/Time: 2008-9-29 21:29:49

Test Laboratory: SGS-GSM

W1900-Body-Worn-WCDMA-Mid-P5 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

Communication System: WCDMA Band II ; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900_Body Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle P5/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.141 mW/g

Body Worn - Middle P5/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 9.94 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.154 mW/g; SAR(10 g) = 0.077 mW/g

Maximum value of SAR (measured) = 0.179 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

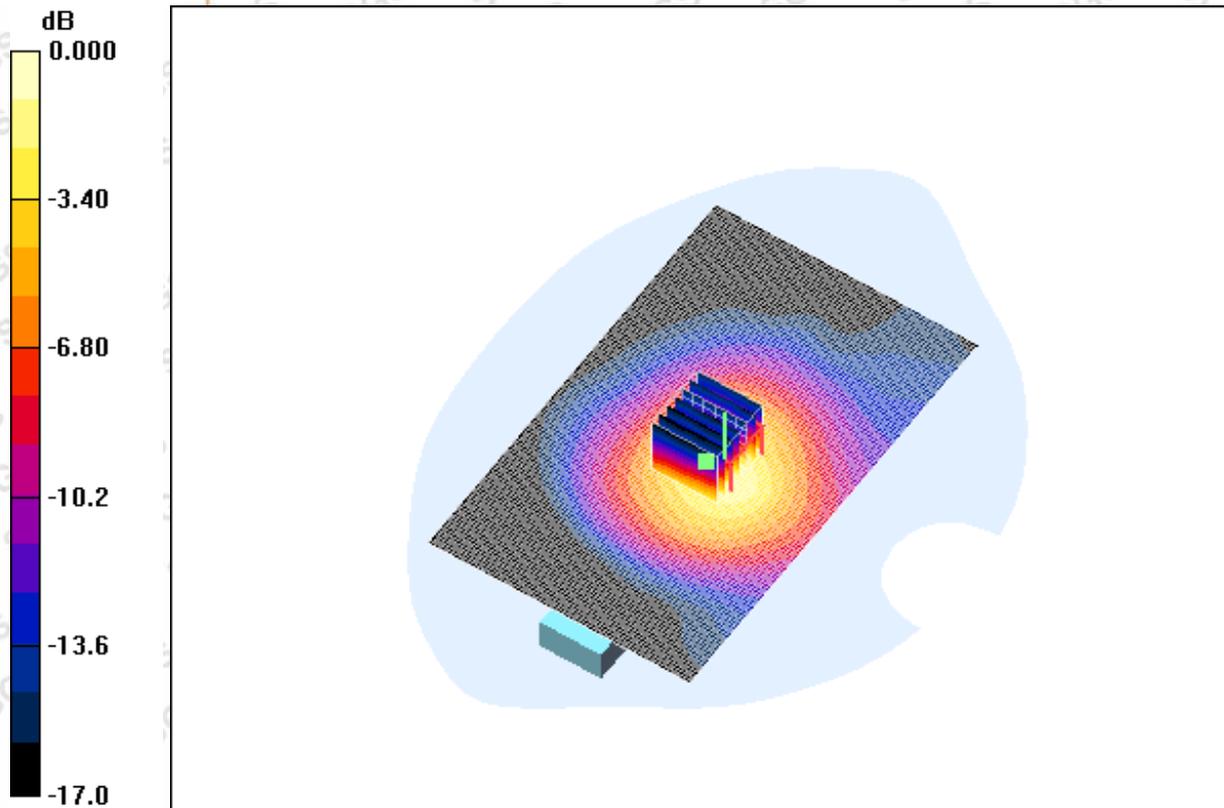

0 dB = 0.179mW/g

4.42 WCDMA 1900-Body-Worn-HSPA-Middle-P1

Date/Time: 2008-9-29 23:08:25

Test Laboratory: SGS-GSM

W1900-Body-Worn-HSDPA-Mid-P1 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Communication System: WCDMA Band II ; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900-Body Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle p1/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.855 mW/g

Body Worn - Middle p1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 16.2 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.718 mW/g; SAR(10 g) = 0.378 mW/g

Maximum value of SAR (measured) = 0.789 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

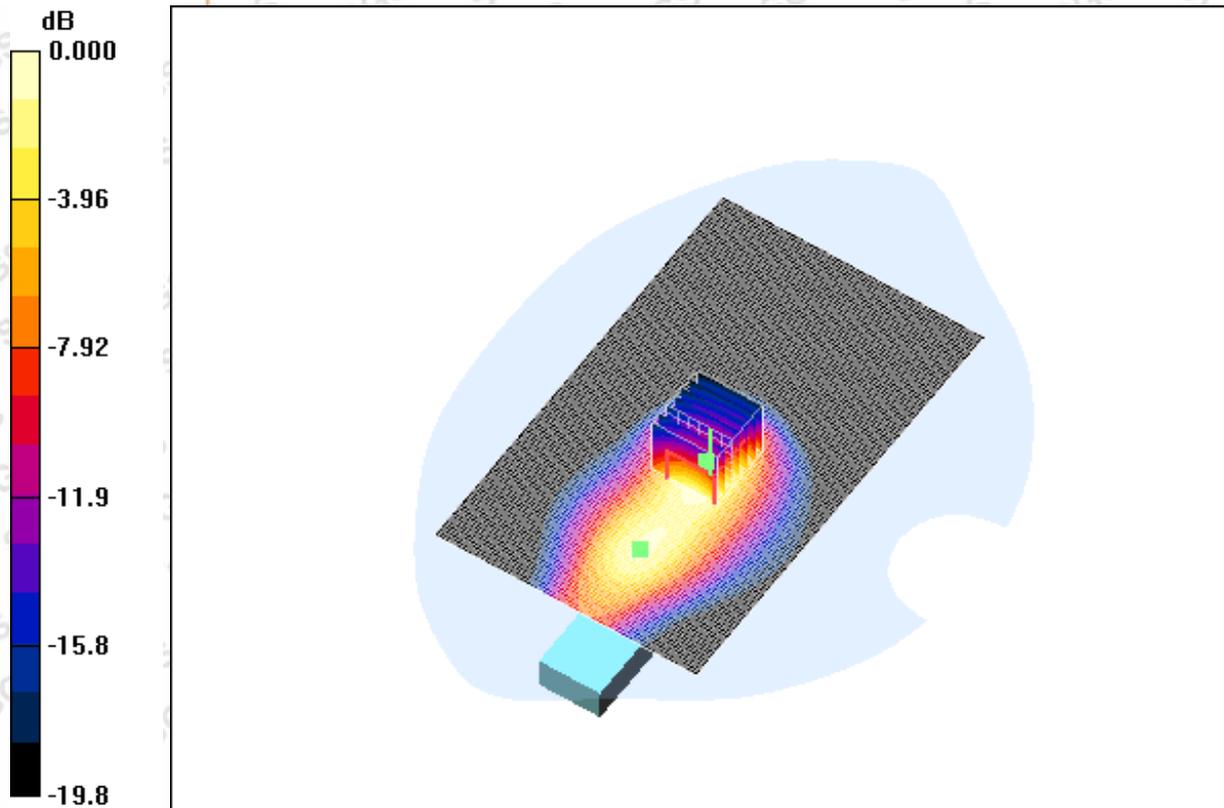

0 dB = 0.789mW/g

4.43 WCDMA 1900-Body-Worn-HSPA-Middle-P2

Date/Time: 2008-9-29 23:39:51

Test Laboratory: SGS-GSM

W1900-Body-Worn-HSDPA-Mid-P2 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Communication System: WCDMA Band II ; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900-Body Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle p2/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.894 mW/g

Body Worn - Middle p2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 18.2 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.822 mW/g; SAR(10 g) = 0.436 mW/g

Maximum value of SAR (measured) = 0.913 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

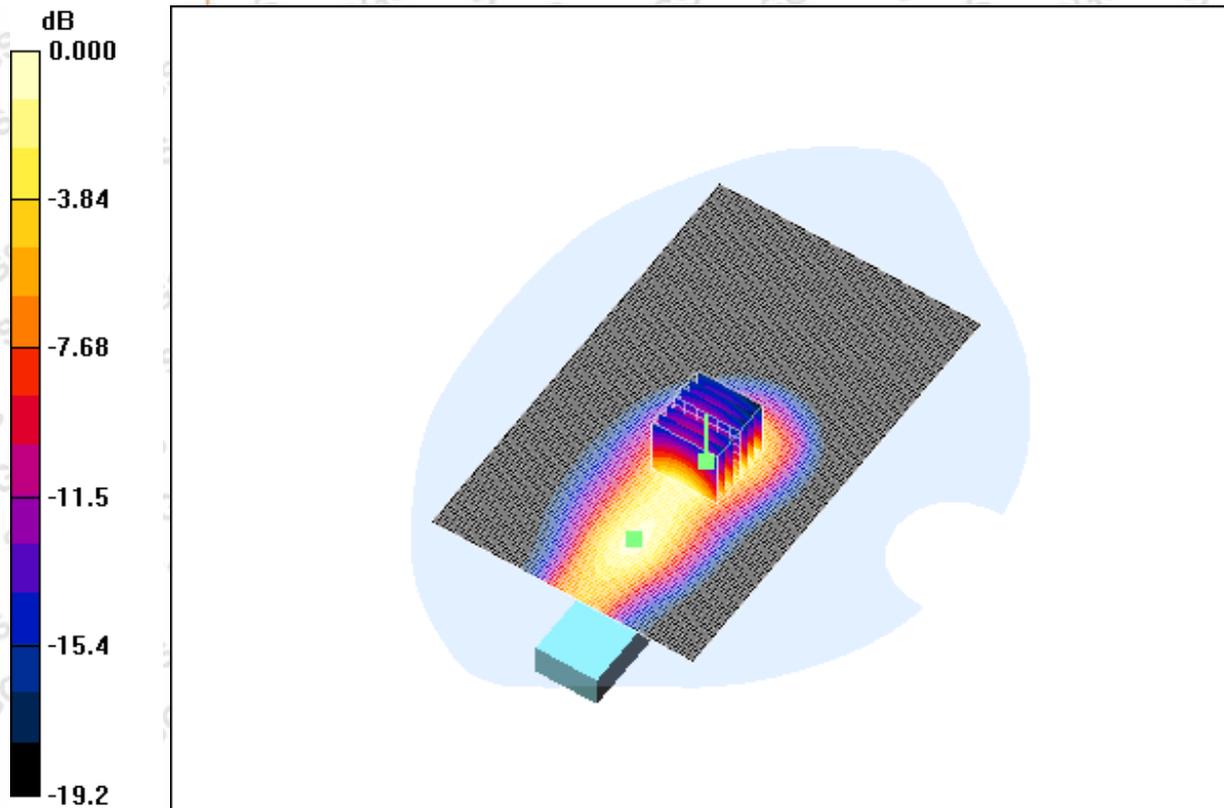

0 dB = 0.913mW/g

4.44 WCDMA 1900-Body-Worn-HSPA-Middle-P3

Blank

4.45 WCDMA 1900-Body-Worn- HSPA -Middle-P4

Blank

4.46 WCDMA 1900-Body-Worn- HSPA -Middle-P5

Blank

4.47 WCDMA1900-Body-Worn--WCDMA--Worstcase-Low

Date/Time: 2008-9-29 15:19:22

Test Laboratory: SGS-GSM

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

W1900-Body-Worn-WCDMA-Low-P2 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

Communication System: WCDMA Band II ; Frequency: 1852.5 MHz; Duty Cycle: 1:1

Medium: HSL1900_Body Medium parameters used (interpolated): $f = 1852.5$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Low P2/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.05 mW/g

Body Worn - Low P2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 19.7 V/m; Power Drift = -0.278 dB

Peak SAR (extrapolated) = 1.66 W/kg

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SAR(1 g) = 0.929 mW/g; SAR(10 g) = 0.489 mW/g

Maximum value of SAR (measured) = 1.03 mW/g

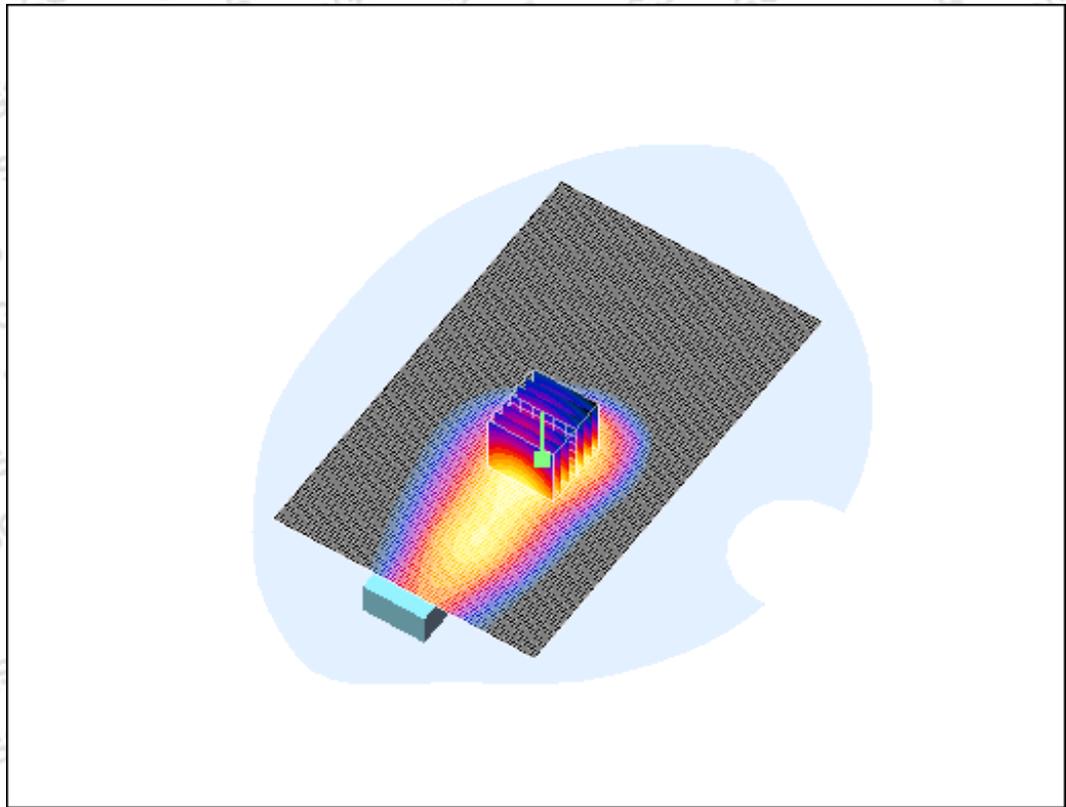

0 dB = 1.03mW/g

4.48 WCDMA1900-Body-Worn--WCDMA-- Worstcase-High

Date/Time: 2008-9-29 15:46:54

Test Laboratory: SGS-GSM

W1900-Body-Worn-WCDMA-High-P2 0.5cm

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

DUT: KZ017AK01; Type: Body; Serial: 20080616

Communication System: WCDMA Band II ; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL1900_Body Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.59$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn -High P2/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.02 mW/g

Body Worn -High P2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 18.4 V/m; Power Drift = -0.188 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.907 mW/g; SAR(10 g) = 0.468 mW/g

Maximum value of SAR (measured) = 1.01 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

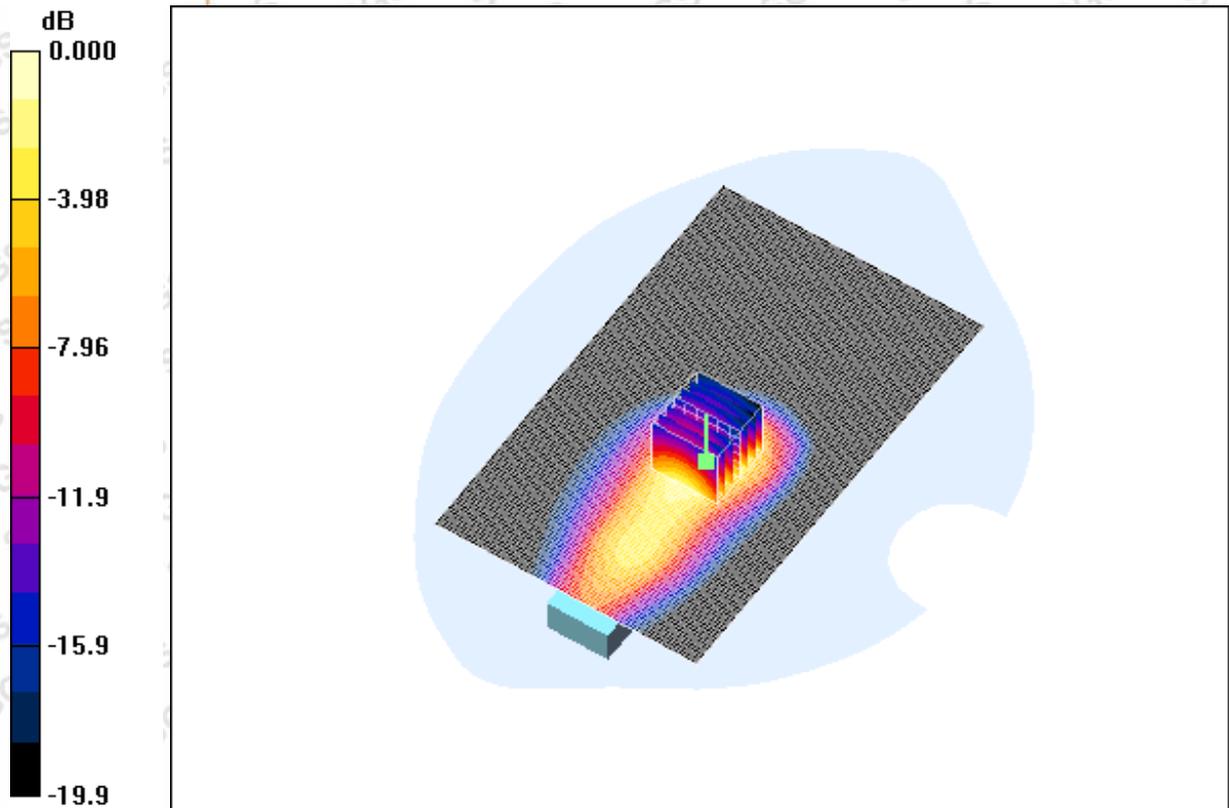

0 dB = 1.01mW/g

WCDMA1900-Body-Worn- WCDMA -P1-Low

Date/Time: 2008-9-29 17:18:28

Test Laboratory: SGS-GSM

W1900-Body-Worn-WCDMA-Low-P1 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

SGS-CSTC Standards Technical Services, Co, Ltd.
 Shanghai Branch GSM Laboratory

9/F, 3rd Building, No. 889, Yishan Road, Shanghai, China 200233
 中国·上海·宜山路889号3号楼9层 邮编: 200233

t (86 -21) 61402666*2736
 t (86 -21) 61402666*2736

f (86 -21) 54500149
 f (86 -21) 54500149

www.cn.sgs.com
 e sgs.china@sgs.com

Communication System: WCDMA Band II ; Frequency: 1852.5 MHz; Duty Cycle: 1:1

Medium: HSL1900_Body Medium parameters used (interpolated): $f = 1852.5$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Low P1/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.08 mW/g

Body Worn - Low P1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 21.3 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 0.796 mW/g; SAR(10 g) = 0.410 mW/g

Maximum value of SAR (measured) = 0.884 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

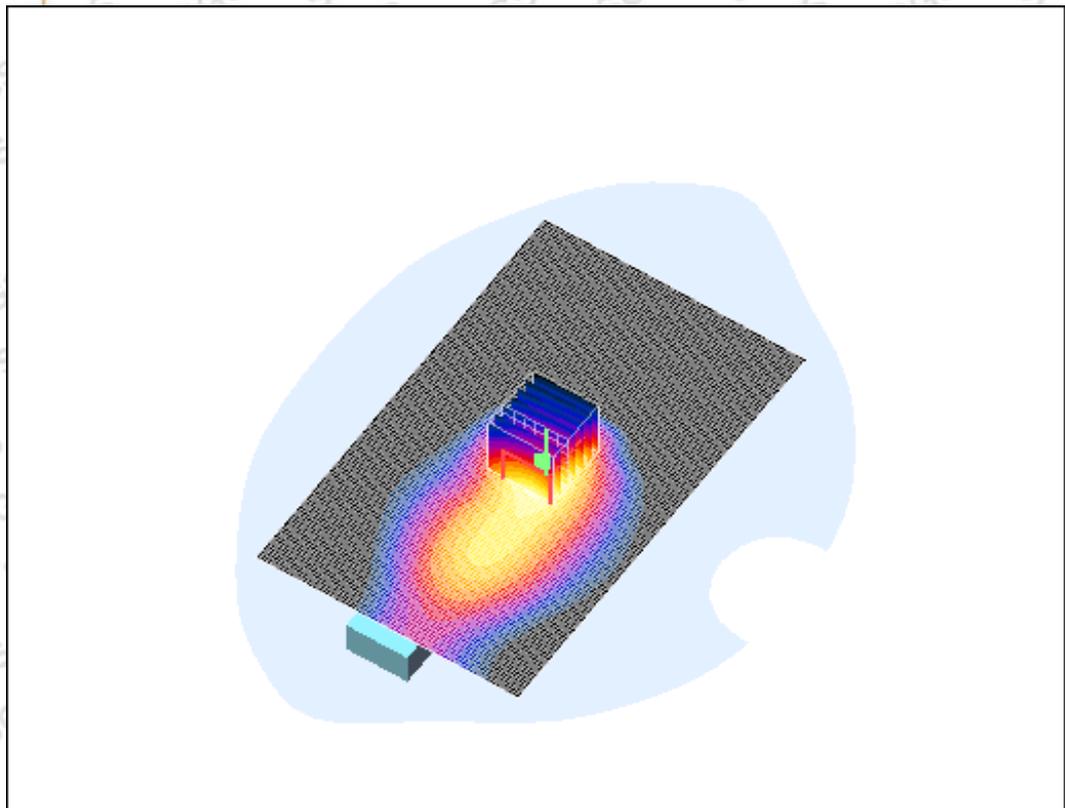

0 dB = 0.884mW/g

WCDMA1900-Body-Worn- WCDMA -P1-High

Date/Time: 2008-9-29 17:50:57

Test Laboratory: SGS-GSM

W1900-Body-Worn-WCDMA-High-P1 0.5cm

DUT: KZ017AK01; Type: Body; Serial: 20080616

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Communication System: WCDMA Band II ; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL1900_Body Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.59$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn -High P1/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.28 mW/g

Body Worn -High P1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 22.2 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.901 mW/g; SAR(10 g) = 0.455 mW/g

Maximum value of SAR (measured) = 0.998 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

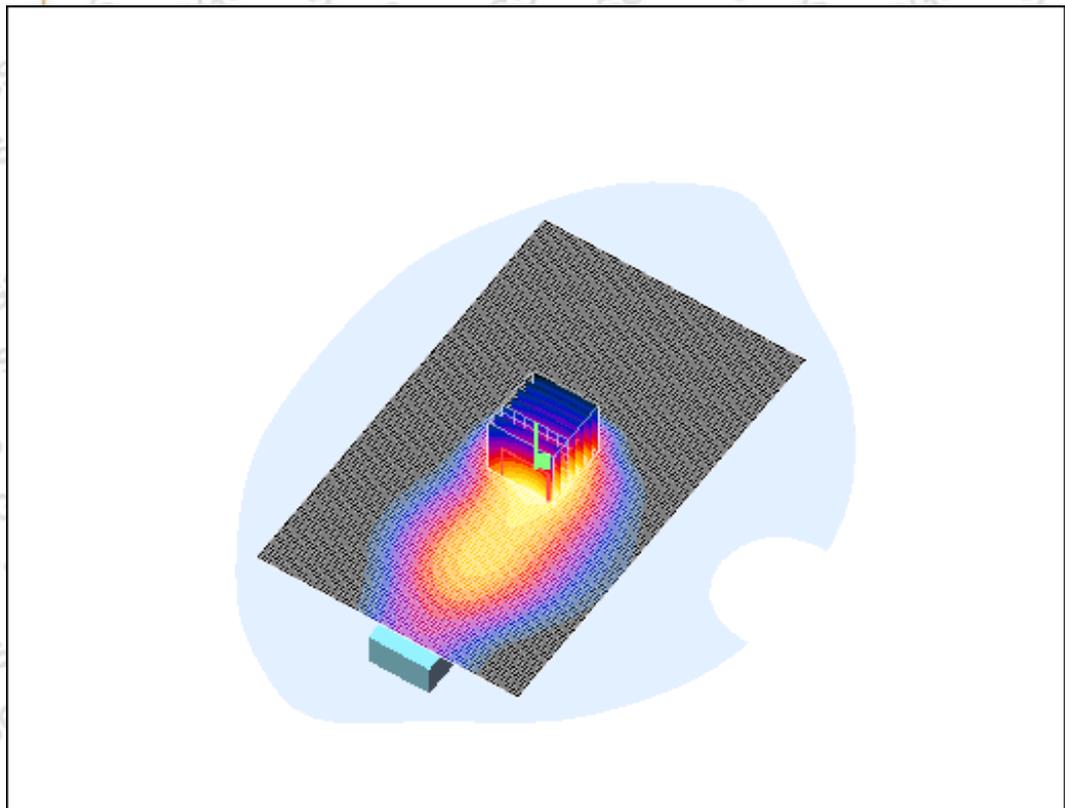

0 dB = 0.998mW/g

WCDMA1900-Body-Worn-HSPA-Worstcase-Low

Blank

WCDMA1900-Body-Worn- HSPA-Worstcase-High

Blank

System Performance Check

System Validation for 900MHz-Body-Worn

Date/Time: 2008-9-27 11:26:13

Test Laboratory: SGS-GSM

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SystemPerformanceCheck-D900-Body-0927

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:184

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: HSL900-Body Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.03 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.81, 5.81, 5.81); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

$d=15\text{mm}$, Pin=250mW 3/Area Scan (81x131x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.99 mW/g

$d=15\text{mm}$, Pin=250mW 3/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$



Reference Value = 53.2 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 4.37 W/kg

SAR(1 g) = 2.82 mW/g; SAR(10 g) = 1.79 mW/g

Maximum value of SAR (measured) = 3.07 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

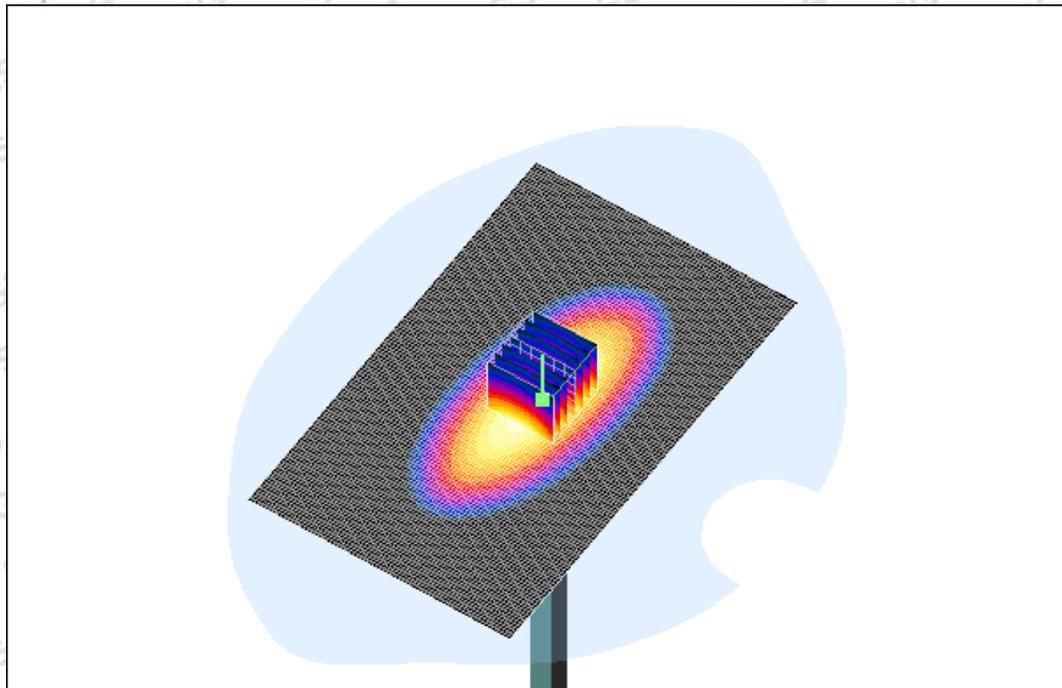

0 dB = 3.07mW/g

System Validation for 900MHz-Body-Worn

Date/Time: 2008-9-28 14:12:36

Test Laboratory: SGS-GSM

SystemPerformanceCheck-D900-Body-0928

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:184

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: HSL900-Body Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.03 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.81, 5.81, 5.81); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

d=15mm, Pin=250mW/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 3.03 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 51.6 V/m; Power Drift = -0.244 dB

Peak SAR (extrapolated) = 4.29 W/kg

SAR(1 g) = 2.76 mW/g; SAR(10 g) = 1.75 mW/g

Maximum value of SAR (measured) = 3.02 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

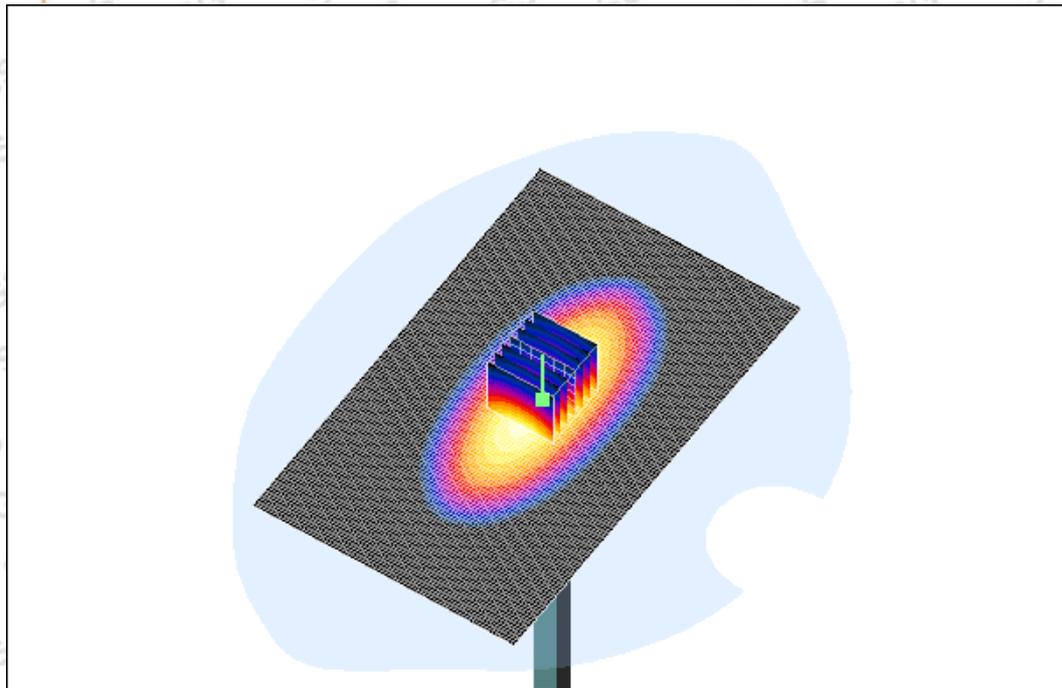

0 dB = 3.02mW/g

System Validation for 1900MHz-Body-Worn

Date/Time: 2008-9-29 12:46:35

Test Laboratory: SGS-GSM

SystemPerformanceCheck-D1900-Body-0929

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d028

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900_Body Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.59 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

d=10mm, Pin=250mW/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 9.48 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 77.6 V/m; Power Drift = 0.120 dB

Peak SAR (extrapolated) = 15.7 W/kg

SAR(1 g) = 8.51 mW/g; SAR(10 g) = 4.39 mW/g

Maximum value of SAR (measured) = 9.65 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

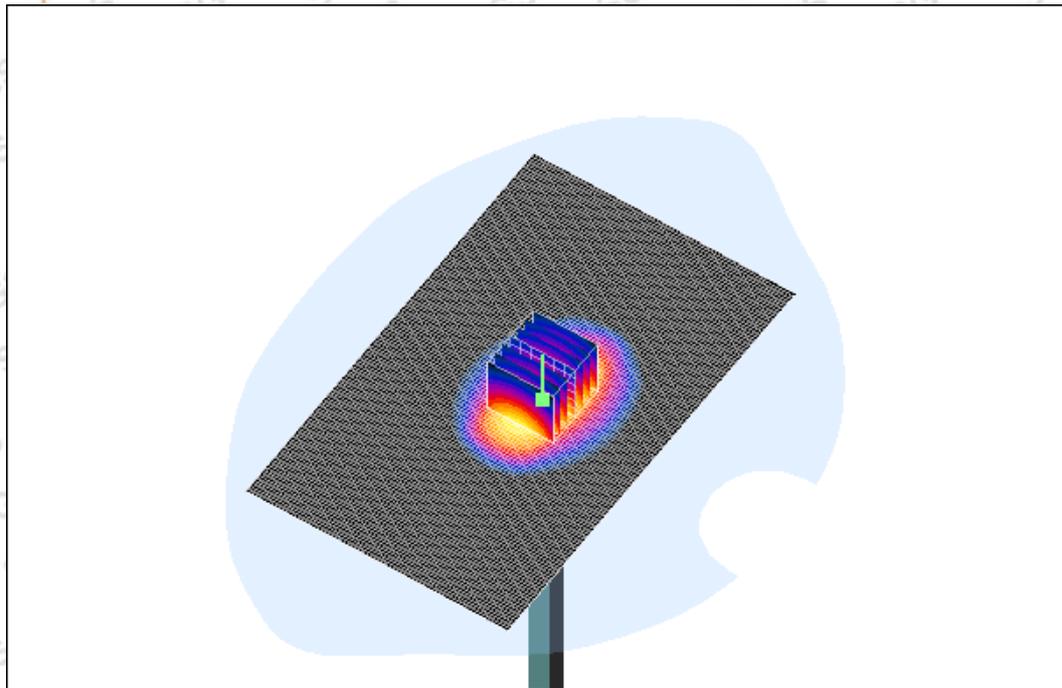

0 dB = 9.65mW/g

System Validation for 1900MHz-Body-Worn

Date/Time: 2008-9-30 10:26:46

Test Laboratory: SGS-GSM

SystemPerformanceCheck-D1900-Body-0930

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d028

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900_Body Medium parameters used: $f = 1900$ MHz; $\sigma = 1.59$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

d=10mm, Pin=250mW 2/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 10.1 mW/g

d=10mm, Pin=250mW 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 80.2 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 8.78 mW/g; SAR(10 g) = 4.5 mW/g

Maximum value of SAR (measured) = 9.97 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

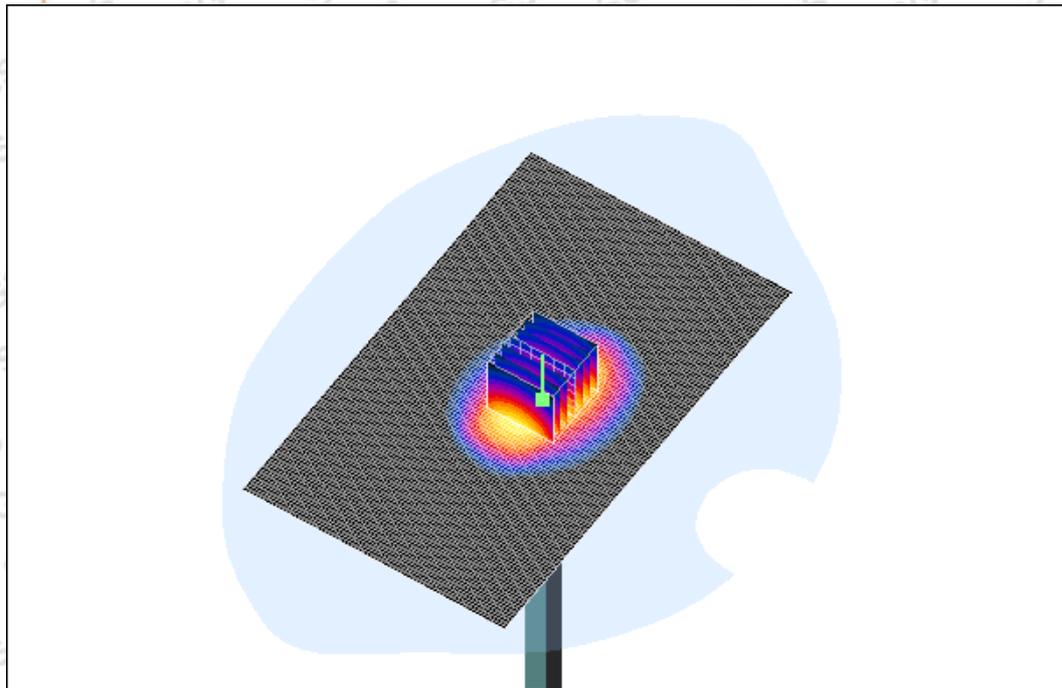

0 dB = 9.97mW/g

System Validation for 1900MHz-Body-Worn

Date/Time: 2008-10-21 15:10:27

Test Laboratory: SGS-GSM

SystemPerformanceCheck-D1900-Body-1021

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d028

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900-Body Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.58 \text{ mho/m}$; $\epsilon_r = 52.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.6, 4.6, 4.6); Calibrated: 2008-1-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2007-11-19
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

d=15mm, Pin=250mW 2/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 10.6 mW/g

d=15mm, Pin=250mW 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 34.0 V/m; Power Drift = 0.160 dB

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 9.26 mW/g; SAR(10 g) = 4.87 mW/g

Maximum value of SAR (measured) = 10.5 mW/g

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

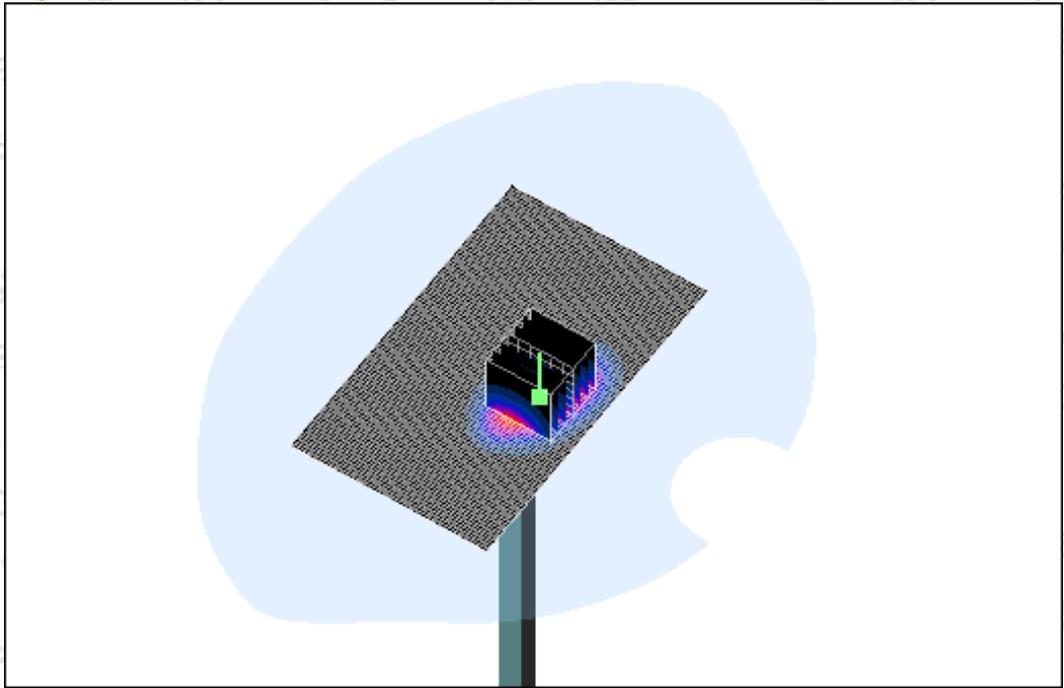

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Appendix

1. Photographs of Test Setup

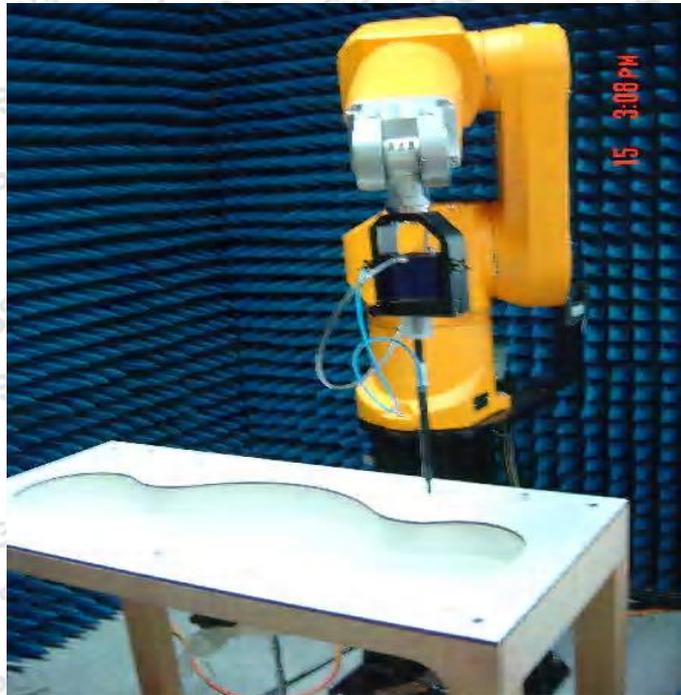


Fig.1 Photograph of the SAR measurement System



Fig.2 Photograph of the Tissue Simulant Fluid Liquid depth 15cm for Body Worn



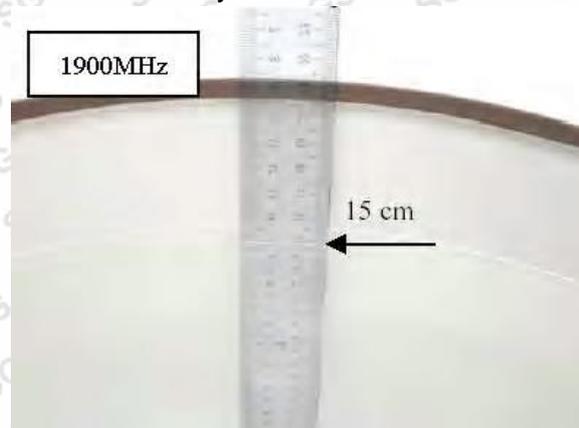


Fig.3 Photograph of the Tissue Simulant Fluid Liquid depth 15cm for Body Worn

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

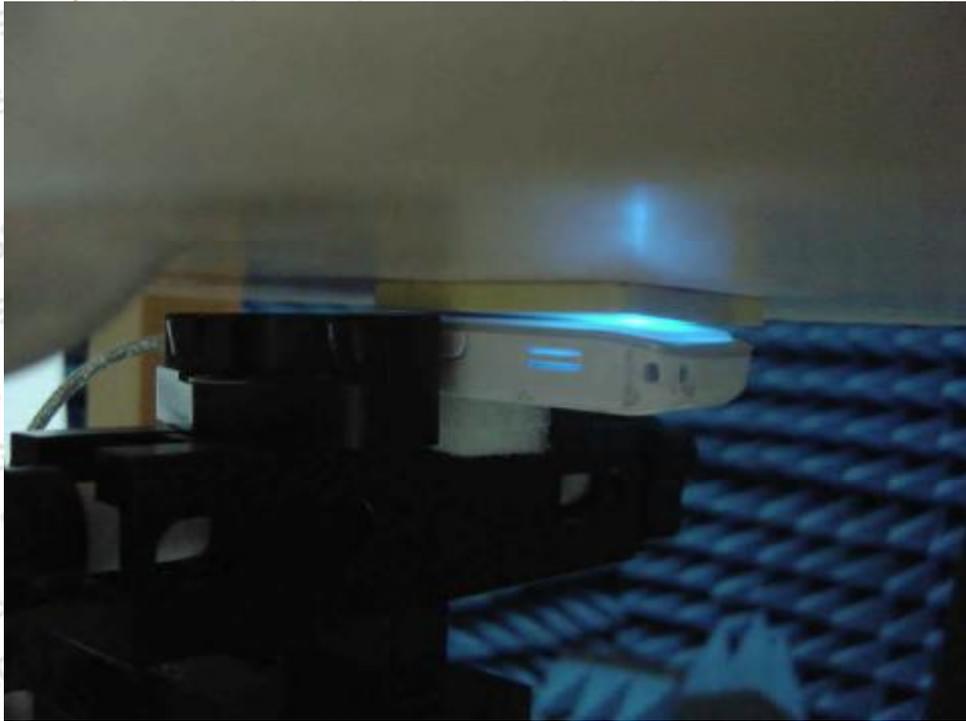


P1

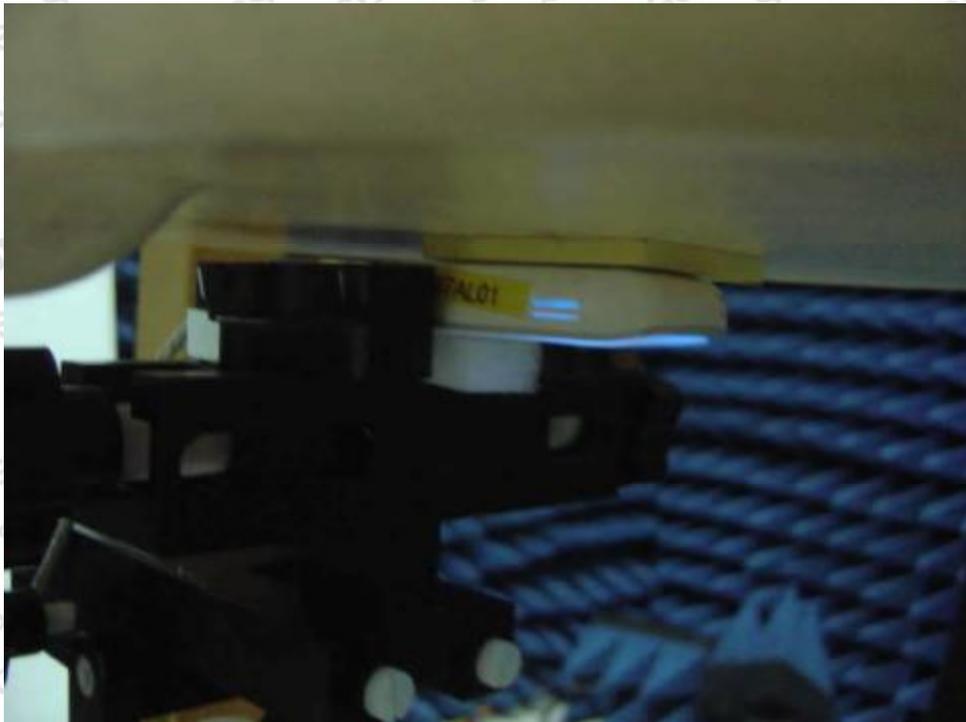

P2

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

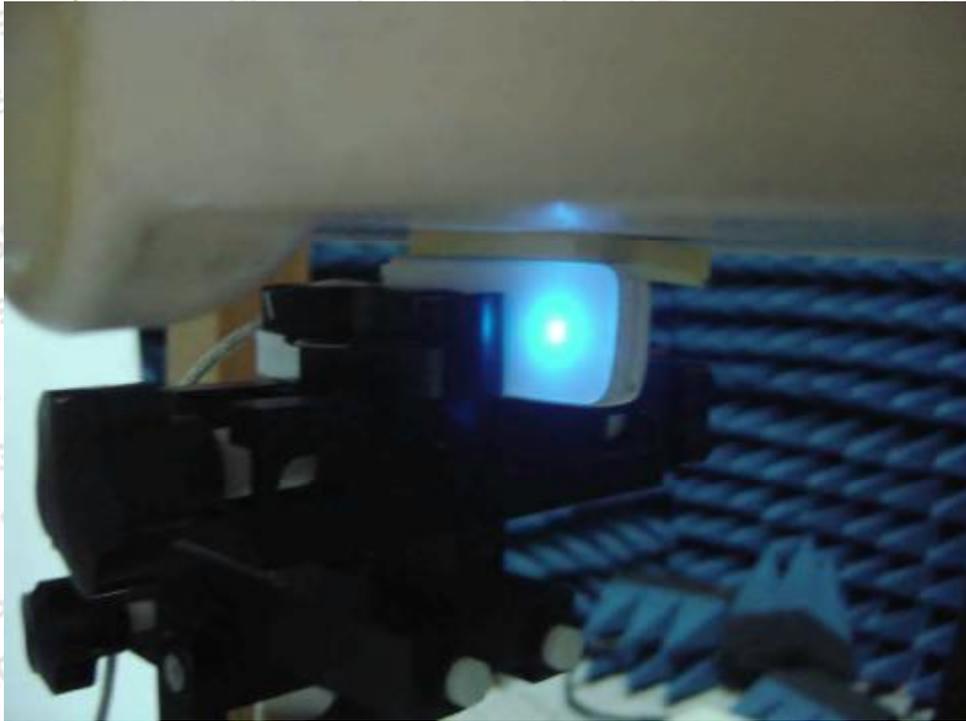


P3



P4

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

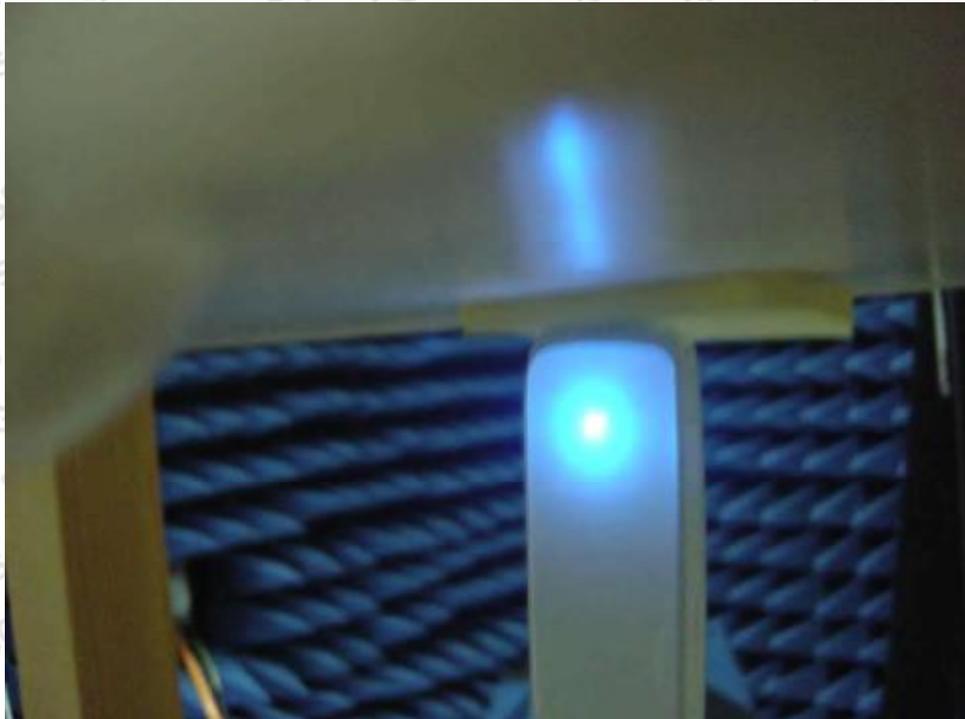

P5

Fig.4 Photograph of the BodyWorn status(P1~P5)
 (The separator was removed when performing all the tests)

2. Photographs of the EUT



Fig.5 Photograph of the EUT

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

3. Probe Calibration certificate

Calibration Laboratory of
 Schmid & Partner
 Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
 S Service suisse d'étalonnage
 S Servizio svizzero di taratura
 S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client: **SGS China (Auden)**

Certificate No: **ES3-3088_Jan08**

CALIBRATION CERTIFICATE

Object: **ES3DV3 - SN:3088**

Calibration procedure(s): **QA.CAL-01.v6
 Calibration procedure for dosimetric E-field probes**

Calibration date: **January 18, 2008**

Condition of the calibrated item: **In Tolerance**

This calibration certificate documents the traceability in national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&E critical for calibration):

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4413B	GD41293874	28-Mar-07 (METAS, No. 217-00570)	Mar-08
Power sensor E4412A	MY41495277	28-Mar-07 (METAS, No. 217-00570)	Mar-08
Power sensor E4412A	MY41495087	28-Mar-07 (METAS, No. 217-00570)	Mar-08
Reference 3 dB Attenuator	SN: 55054 (3c)	8-Aug-07 (METAS, No. 217-00719)	Aug-08
Reference 20 dB Attenuator	SN: 85056 (20a)	28-Mar-07 (METAS, No. 217-00571)	Mar-08
Reference 30 dB Attenuator	SN: 65129 (30a)	8-Aug-07 (METAS, No. 217-00729)	Aug-08
Reference Probe ES3DV2	SN: 3073	2-Jan-08 (SPEAG, No. ES3-3013_Jan08)	Jan-08
DAE4	SN: 854	20-Apr-07 (SPEAG, No. DAE4-054_Apr07)	Apr-08

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8649C	US3642US1703	4-Aug-08 (SPEAG, in house check Oct-07)	In house check: Oct-08
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-07)	In house check: Oct-08

Created by: **Krisja Pokovic** (Name), **Technical Manager** (Function), [Signature]

Approved by: **Maria Kusler** (Name), **Quality Manager** (Function), [Signature]

Issued: January 18, 2008

This calibration certificate shall not be reproduced except in full, without written approval of the laboratory.

Certificate No: ES3-3088_Jan08

Page 1 of 9

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL tissue simulating liquid
 NORM_{x,y,z} sensitivity in free space
 Conf sensitivity in TSL / NORM_{x,y,z}
 DCP diode compression point
 Polarization φ φ rotation around probe axis
 Polarization θ θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}**: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConfF*).
- **NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConfF*.
- **DCPx,y,z**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- **ConfF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConfF* whereby the uncertainty corresponds to that given for *ConfF*. A frequency dependent *ConfF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

ES3DV3 SN:3088

January 18, 2008

Probe ES3DV3

SN:3088

Manufactured:	July 20, 2005
Last calibrated:	December 12, 2006
Recalibrated:	January 18, 2008

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

Certificate No: ES3-0088_Jan08

Page 3 of 3

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

ES3DV3 SN:3088

January 18, 2008

DASY - Parameters of Probe: ES3DV3 SN:3088

Sensitivity in Free Space ^A			Diode Compression ^B	
NormX	1.31 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	92 mV
NormY	1.26 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	93 mV
NormZ	1.24 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	93 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL	900 MHz	Typical SAR gradient: 5 % per mm	
	Sensor Center to Phantom Surface Distance	3.0 mm	4.0 mm
	SAR ₉₀ [%] Without Correction Algorithm	11.0	6.8
	SAR ₉₀ [%] With Correction Algorithm	0.9	0.4

TSL	1750 MHz	Typical SAR gradient: 10 % per mm	
	Sensor Center to Phantom Surface Distance	3.0 mm	4.0 mm
	SAR ₉₀ [%] Without Correction Algorithm	9.6	5.1
	SAR ₉₀ [%] With Correction Algorithm	0.7	0.9

Sensor Offset

Probe Tip to Sensor Center 2.0 mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8)

^B Numerical linearization on parameter; uncertainty not required.


This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

ES3DV3 SN:3088

January 18, 2008

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

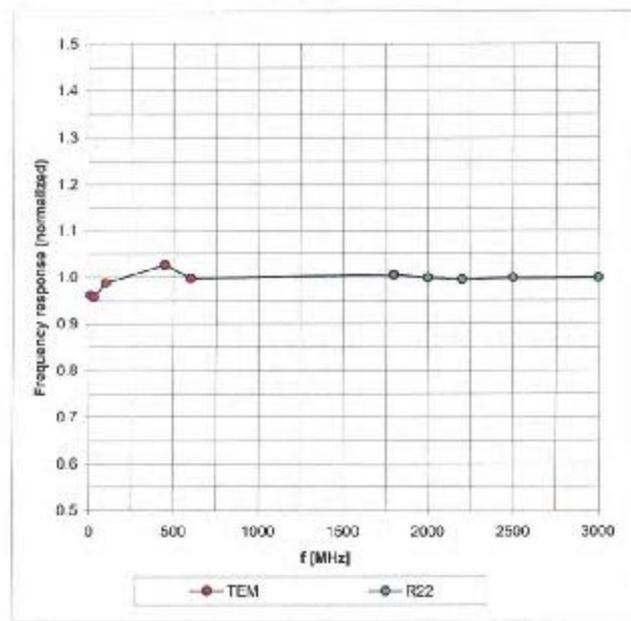

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Certificate No: ES3-3088_Jan08



Page 5 of 9

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

ES3DV3 SN:3088

January 18, 2008

Receiving Pattern (ϕ), $\theta = 0^\circ$

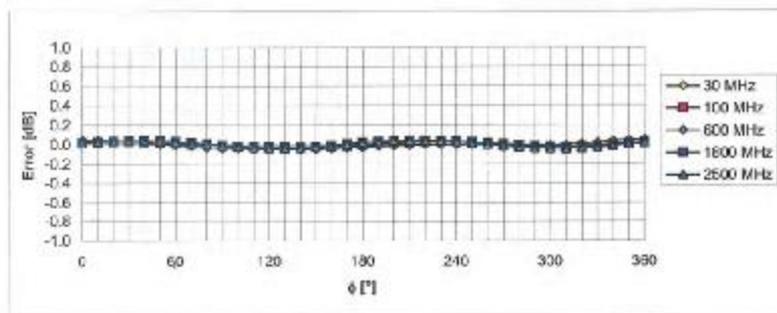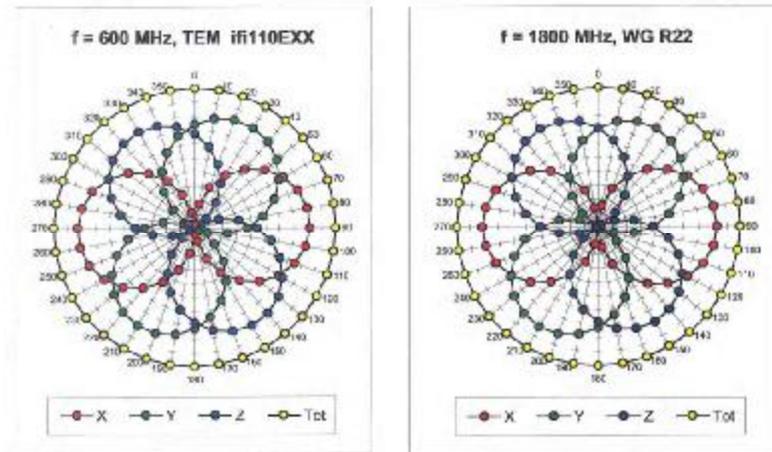

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Certificate No: ES3-3088_Jan08


Page 6 of 9

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

ES3DV3 SN:3088

January 18, 2008

Dynamic Range f(SAR_{head}) (Waveguide R22, f = 1800 MHz)

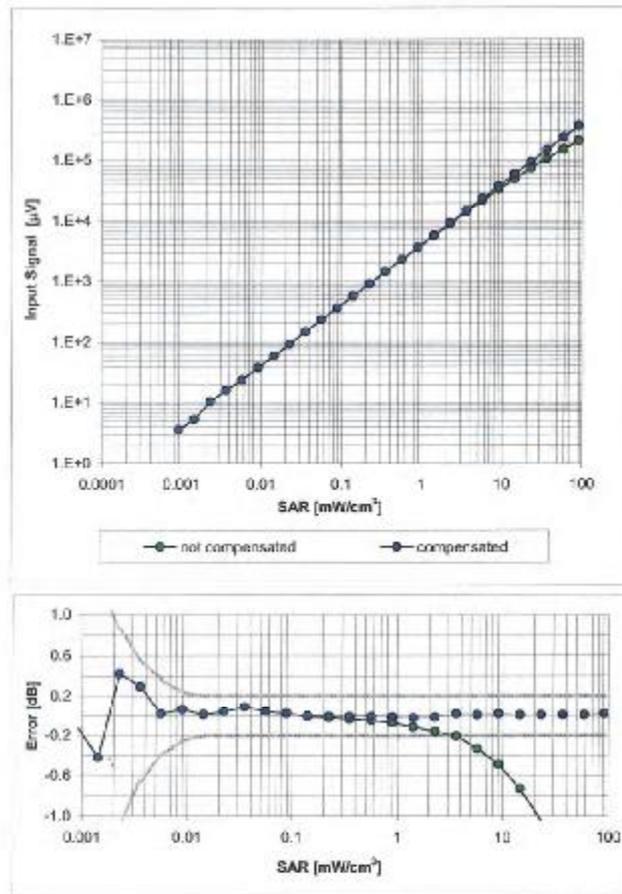

Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

Certificate No: ES3-3C68_Jan08


Page 7 of 9

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

ES3DV3 SN:3088

January 16, 2008

Conversion Factor Assessment

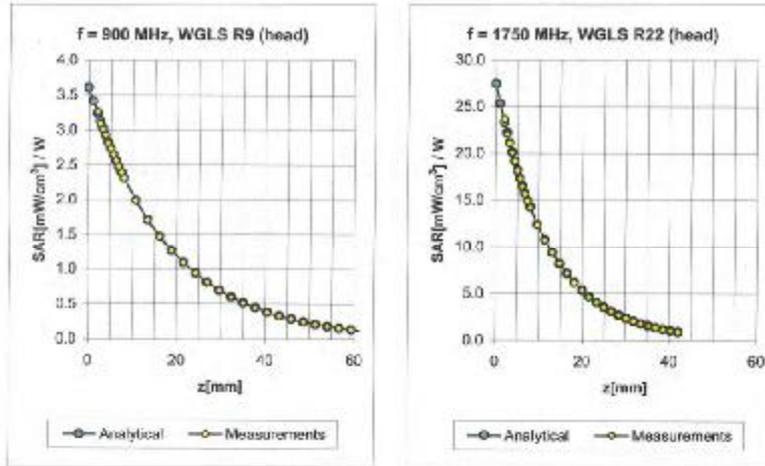

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.90	1.23	6.15 ± 11.0% (k=2)
1750	± 50 / ± 100	Head	40.1 ± 5%	1.37 ± 5%	0.93	1.18	5.04 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.73	1.35	4.84 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.70	1.39	4.53 ± 11.8% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.95	1.14	5.81 ± 11.0% (k=2)
1750	± 50 / ± 100	Body	53.4 ± 5%	1.49 ± 5%	0.90	1.17	4.92 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.84	1.23	4.60 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.84	1.17	4.13 ± 11.8% (k=2)

^c The validity of ± 100 MHz only applies for DASYS v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Certificate No: ES3-3088_Jan08

Page 6 of 9


This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

ES3DV3 SN:3088

January 18, 2008

Deviation from Isotropy in HSL™

Error (ϕ , θ), $f = 900$ MHz

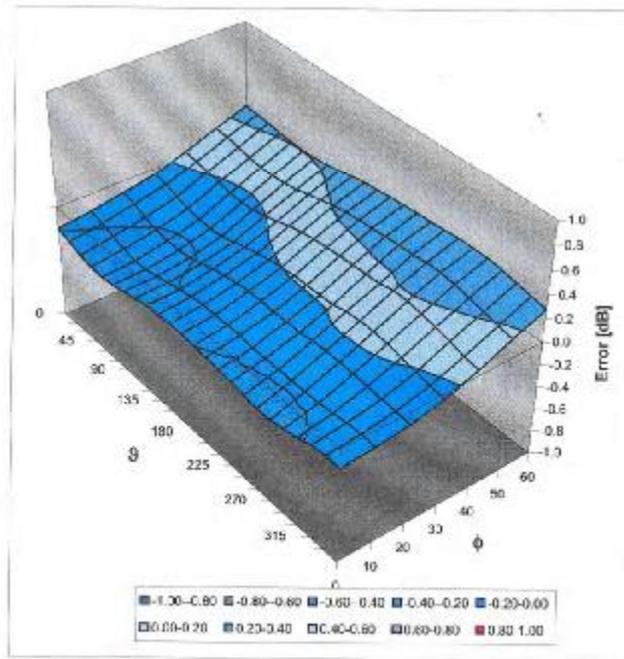

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

Certificate No. ES3-3088_Jan08

Page 9 of 9

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

4. DAE Calibration certification

Calibration Laboratory of
 Schmid & Partner
 Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
 S Service suisse d'étalonnage
 S Servizio svizzero di taratura
 S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **SGS - CSTC (MTT)**

Certificate No: DAE3-569_Nov07

CALIBRATION CERTIFICATE			
Object	DAE3 - SD 000 D03 AA - SN: 569		
Calibration procedure(s)	QA CAL-06.v12 Calibration procedure for the data acquisition electronics (DAE)		
Calibration date:	November 19, 2007		
Condition of the calibrated item	In Tolerance		
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the dressed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.			
Calibration Equipment used (M&TE critical for calibration)			
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Fluke Process Calibrator Type 702	SN: 6286803	01-Oct-07 (Eikal AG, No: 6467)	Oct-08
Kathley Multimeter Type 2001	SN: 0310278	03-Oct-07 (Eikal AG, No: 6465)	Oct-08
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Calibrator Box V1.1	SE UMS 006 AB 1004	25-Jun-07 (SPEAG, in house check)	In house check Jun-08
Calibrated by:	Name Dominique Steffen	Function Technicien	Signature
Approved by:	Fin Barnholt	R&D Director	
			Issued: November 19, 2007
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Certificate No: DAE3-569_Nov07

Page 1 of 5

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

SGS-CSTC Standards Technical Services, Co, Ltd.
 Shanghai Branch GSM Laboratory

9/F, 3rd Building, No. 889, Yishan Road, Shanghai, China 200233
 中国·上海·宜山路 889 号 3 号楼 9 层 邮编: 200233

t (86-21) 61402666*2736 f (86-21) 54500149
 t (86-21) 61402666*2736 f (86-21) 54500149

www.cn.sgs.com
 e sgs.china@sgs.com

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
 - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
 - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
 - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
 - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - **Input resistance:** DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
 - **Power consumption:** Typical value for information. Supply currents in various operating modes.

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

DC Voltage Measurement

A/D - Converter Resolution nominal
 High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV
 Low Range: 1LSB = 81nV, full range = -1.....+3mV
 DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.776 \pm 0.1% (k=2)	404.362 \pm 0.1% (k=2)	404.137 \pm 0.1% (k=2)
Low Range	3.94862 \pm 0.7% (k=2)	3.94274 \pm 0.7% (k=2)	3.94290 \pm 0.7% (k=2)

Connector Angle

Connector Angle to be used in DASY system	285 \pm 1 $^\circ$
---	----------------------

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Appendix

1. DC Voltage Linearity

High Range	Input (μV)	Reading (μV)	Error (%)
Channel X + Input	20000	19999.4	0.00
Channel X + Input	2000	2003.10	0.02
Channel X - Input	2000	-1996.40	-0.01
Channel Y + Input	20000	19999.8	0.00
Channel Y + Input	2000	2000.56	0.00
Channel Y - Input	2000	-2003.76	0.02
Channel Z + Input	20000	19999.7	0.00
Channel Z + Input	2000	1999.91	0.00
Channel Z - Input	2000	-2001.93	0.01

Low Range	Input (μV)	Reading (μV)	Error (%)
Channel X + Input	2000	2000	0.00
Channel X + Input	200	199.91	-0.05
Channel X - Input	200	-200.13	0.06
Channel Y + Input	2000	2000	0.00
Channel Y + Input	200	199.90	-0.55
Channel Y - Input	200	-200.33	0.17
Channel Z + Input	2000	2000	0.00
Channel Z + Input	200	198.87	-0.56
Channel Z - Input	200	-200.97	0.48

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	-5.51	-5.11
	-200	9.14	5.16
Channel Y	200	7.38	7.24
	-200	-8.13	-8.74
Channel Z	200	-5.41	-5.65
	-200	4.60	4.15

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	1.82	0.97
Channel Y	200	0.44	-	3.38
Channel Z	200	-0.57	-0.43	-

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16396	15475
Channel Y	15747	16647
Channel Z	16314	16212

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec
 Input 10M Ω

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation (μ V)
Channel X	-0.02	-0.85	1.22	0.32
Channel Y	-0.62	-1.53	0.45	0.30
Channel Z	-0.95	-2.89	-0.14	0.35

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance

	Zeroing (M Ω m)	Measuring (M Ω m)
Channel X	0.2000	199.3
Channel Y	0.2000	203.2
Channel Z	0.2001	204.8

8. Low Battery Alarm Voltage (verified during pre test)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (verified during pre test)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.0	+6	+14
Supply (- Vcc)	-0.01	-8	-9

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

7. Dipole Calibration certification

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **SGS China (Auden)**

Certificate No.: **D900V2-184_Dec07**

CALIBRATION CERTIFICATE			
Object	D900V2 - SN: 184		
Calibration procedure(s)	QA CAL-05 v7 Calibration procedure for dipole validation kits		
Calibration date:	December 21, 2007		
Condition of the calibrated item	In Tolerance		
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.			
Calibration Equipment used (M&TE critical for calibration)			
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37460704	04-Oct-07 (METAS, No. 217-00735)	Oct-08
Power sensor HP 8481A	US37292793	04-Oct-07 (METAS, No. 217-00735)	Oct-08
Reference 20 dB Attenuator	SN: 5098 (20g)	07-Aug-07 (METAS, No. 217-00718)	Aug-08
Reference 10 dB Attenuator	SN: 5047.2 (10r)	07-Aug-07 (METAS, No. 217-00718)	Aug-08
Reference Probe ET3DVB (HF)	SN 1507	29-Oct-07 (SPEAG, No. ET3-1007_Oct07)	Oct-08
DVE4	SN 601	30-Jan-07 (SPEAG, No. DVE4-601_Jan07)	Jan-08
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY410E2317	18-Oct-02 (SPEAG, in house check Oct-07)	In house check: Oct-09
RF generator R&S SMT-05	100005	4-Aug-99 (SPEAG, in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	U53739C68 S4208	18-Oct-01 (SPEAG, in house check Oct-07)	In house check: Oct-06
Calibrated by:	Name: Wlke Moll	Function: Laboratory Technician	Signature: <i>[Signature]</i>
Approved by:	Name: Katja Pokovic	Function: Technical Manager	Signature: <i>[Signature]</i>
			issued: December 21, 2007
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Certificate No: D900V2-184_Dec07

Page 1 of 9

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

SGS-CSTC Standards Technical Services, Co. Ltd.
 Shanghai Branch GSM Laboratory

9/F, 3rd Building, No. 889, Yishan Road, Shanghai, China 200233
 中国·上海·宜山路 889 号 3 号楼 9 层 邮编: 200233

t (86-21) 61402666*2736 f (86-21) 54500149
 t (86-21) 61402666*2736 f (86-21) 54500149

www.cn.sgs.com
 e sgs.china@sgs.com

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
 C Service suisse d'étalonnage
 S Servizio svizzero di taratura
 S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL tissue simulating liquid
 ConvF sensitivity in TSL / NORM x,y,z
 N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- **Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- **Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- **Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- **Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- **SAR measured:** SAR measured at the stated antenna input power.
- **SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- **SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

SGS-CSTC Standards Technical Services, Co, Ltd.
 Shanghai Branch GSM Laboratory

9/F, 3rd Building, No. 889, Yishan Road, Shanghai, China 200233
 中国·上海·宜山路 889 号 3 号楼 9 层 邮编: 200233

t (86-21) 61402666*2736 f (86-21) 54500149
 t (86-21) 61402666*2736 f (86-21) 54500149

www.cn.sgs.com
 e sgs.china@sgs.com

Measurement Conditions

DASY system configuration, as far as not given on page 1:

DASY Version	DASY4	V4.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	900 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied:

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.97 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	42.5 ± 6 %	0.98 mho/m ± 6 %
Head TSL temperature during test	(22.1 ± 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ² (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.73 mW / g
SAR normalized	normalized to 1W	10.9 mW / g
SAR for nominal Head TSL parameters [†]	normalized to 1W	11.0 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ² (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.75 mW / g
SAR normalized	normalized to 1W	7.00 mW / g
SAR for nominal Head TSL parameters [†]	normalized to 1W	7.05 mW / g ± 16.5 % (k=2)

[†] Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.0	1.05 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.2 ± 6 %	1.06 mho/m ± 6 %
Body TSL temperature during test	(22.6 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.90 mW / g
SAR normalized	normalized to 1W	11.6 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	11.4 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.87 mW / g
SAR normalized	normalized to 1W	7.48 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	7.40 mW / g ± 16.5 % (k=2)

² Correction to nominal TSL parameters according to 2), chapter "SAR Sensitivities"

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	48.8 Ω - 7.5 jΩ
Return Loss	- 22.3 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.3 Ω - 9.4 jΩ
Return Loss	- 19.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.411 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	April 1, 2003

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

DASY4 Validation Report for Head TSL

Date/Time: 21.12.2007 14:51:24

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:184

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: HSL 900 MHz;

Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.98 \text{ mho/m}$; $\epsilon_r = 42.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(5.93, 5.93); Calibrated: 26.10.2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.01.2007
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 172

Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.9 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 4.06 W/kg


SAR(1 g) = 2.73 mW/g; SAR(10 g) = 1.75 mW/g

Maximum value of SAR (measured) = 2.95 mW/g

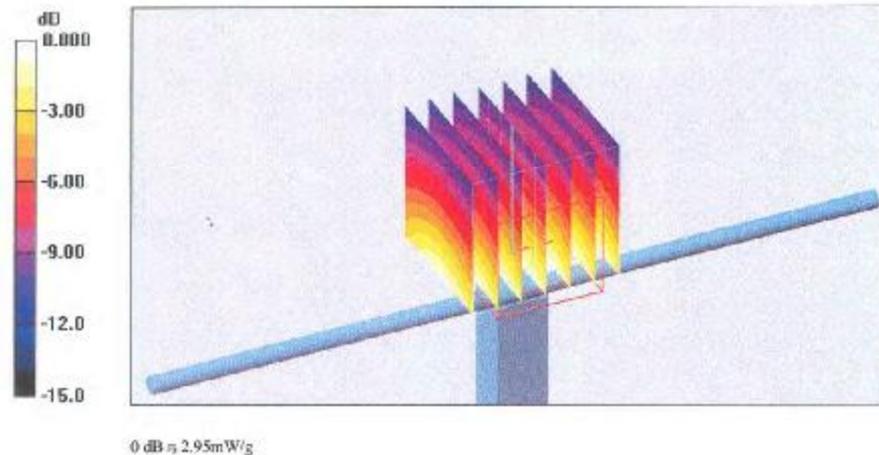

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Impedance Measurement Plot for Head TSL

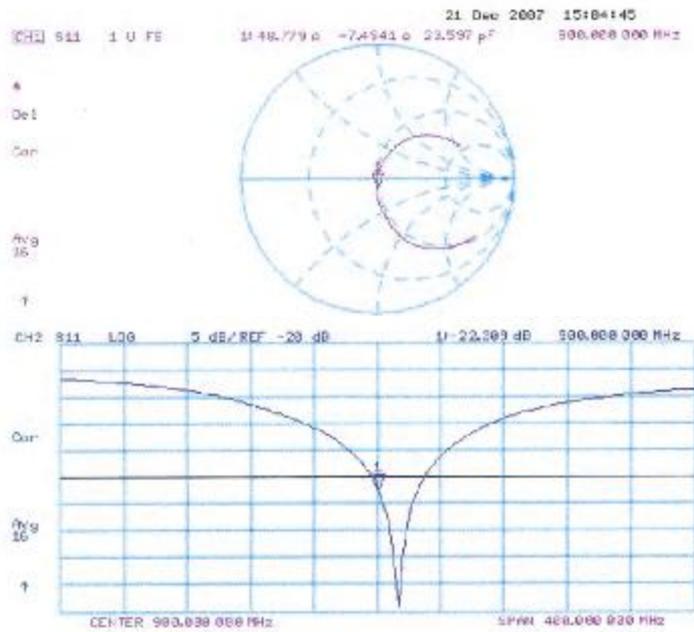

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

DASY4 Validation Report for Body TSL

Date/Time: 21.12.2007 15:46:31

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:184

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: MSL900;

Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.06 \text{ mho/m}$; $\epsilon_r = 54.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(5.57, 5.57, 5.57); Calibrated: 26.10.2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sa901; Calibrated: 30.01.2007
- Phantom: Flat Phantom 4.9L; Type: QD00P49AA
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 172

Pin=250mW/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.9 V/m; Power Drift = 0.008 dB

Peak SAR (extrapolated) = 4.23 W/kg


SAR(1 g) = 2.9 mW/g; SAR(10 g) = 1.87 mW/g

Maximum value of SAR (measured) = 3.16 mW/g

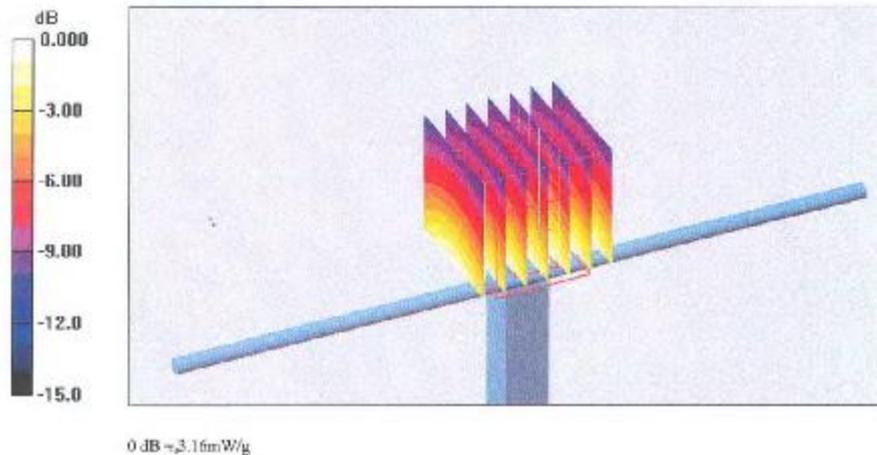

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Impedance Measurement Plot for Body TSL

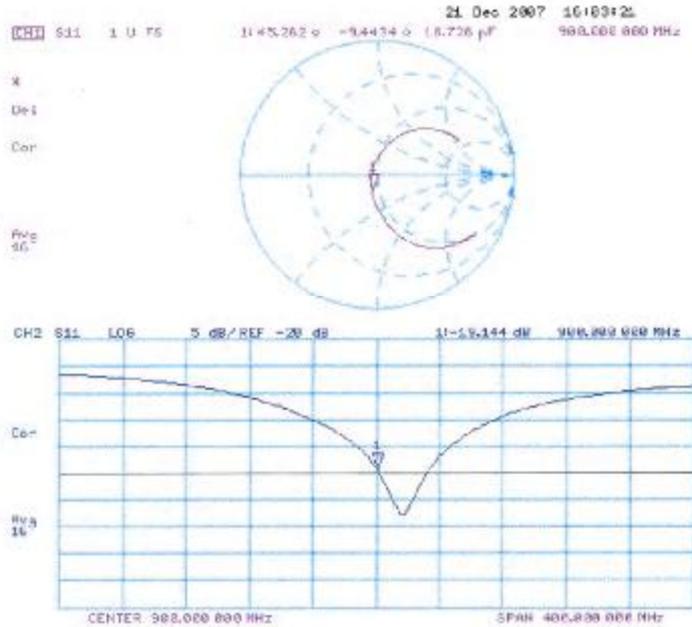

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
 S Service suisse d'étalonnage
 S Servizio svizzero di taratura
 S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client: **SGS China (Auden)**

Certificate No: **D1900V2-5d028_Dec07**

CALIBRATION CERTIFICATE			
Object	D1900V2 - SN: 5d028		
Calibration procedure(s)	QA_CAL-05.v7 Calibration procedure for dipole validation kits		
Calibration date	December 21, 2007		
Condition of the calibrated item	In Tolerance		
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.			
Calibration Equipment used (M&TE critical for calibration)			
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37460704	04-Oct-07 (METAS, No. 217-00736)	Oct-08
Power sensor HP 8481A	US37292783	04-Oct-07 (METAS, No. 217-00736)	Oct-08
Reference 20 dB Attenuator	SN: 5096 (20g)	07-Aug-07 (METAS, No. 217-30718)	Aug-08
Reference 10 dB Attenuator	SN: 5047.2 (10r)	07-Aug-07 (METAS, No. 217-00718)	Aug-08
Reference Probe ET3DVB (HF)	SN: 1537	28-Oct-07 (SPEAG, No. ET3-1507_Gal07)	Oct-08
DAE4	SN 631	30-Jan-07 (SPEAG, No. DAE4-601_Jan07)	Jan-08
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41069317	18-Oct-02 (SPEAG, in house check Oct-07)	In house check: Oct-08
RF generator R&S SMT-06	100035	4-Aug-06 (SPEAG, in house check Oct-07)	In house check: Oct-09
Network Analyser HP 8753E	US37390595 S4206	18-Oct-01 (SPEAG, in house check Oct-07)	In house check: Oct-08
Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature
Approved by:	Name Katja Prokovic	Technica Manager	
			Issued: December 31, 2007
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Certificate No: D1900V2-5d028_Dec07

Page 1 of 9

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

SGS-CSTC Standards Technical Services, Co. Ltd.
 Shanghai Branch GSM Laboratory

9/F, 3rd Building, No. 889, Yishan Road, Shanghai, China 200233
 中国·上海·宜山路889号3号楼9层 邮编: 200233

t (86-21) 61402666*2736 f (86-21) 54500149
 t (86-21) 61402666*2736 f (86-21) 54500149

www.cn.sgs.com
 e sgs.china@sgs.com

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
 C Service suisse d'étalonnage
 S Servizio svizzero di taratura
 S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL tissue simulating liquid
 ConvF sensitivity in TSL / NORM x,y,z
 N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.0 ± 6 %	1.46 mho/m ± 6 %
Head TSL temperature during test	(21.5 ± 0.2) °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	condition	
SAR measured	250 mW input power	9.82 mW / g
SAR normalized	normalized to 1W	39.3 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	37.9 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	5.14 mW / g
SAR normalized	normalized to 1W	20.6 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	20.2 mW / g ± 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter 'SAR Sensitivities'

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.5 ± 6 %	1.54 mho/m ± 6 %
Body TSL temperature during test	(21.5 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.34 mW / g
SAR normalized	normalized to 1W	37.4 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	37.2 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	4.97 mW / g
SAR normalized	normalized to 1W	19.9 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	19.8 mW / g ± 16.5 % (k=2)

² Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.7 Ω + 5.2 $j\Omega$
Return Loss	-24.3 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.5 Ω + 3.4 $j\Omega$
Return Loss	-29.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.198 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.
 No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 17, 2002

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

DASY4 Validation Report for Head TSL

Date/Time: 21.12.2007 09:54:50

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d028

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U10 BB;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(4.86, 4.86, 4.86); Calibrated: 26.10.2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 S0601; Calibrated: 30.01.2007
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; ;
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 172

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.9 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 17.2 W/kg


SAR(1 g) = 9.82 mW/g; SAR(10 g) = 5.14 mW/g

Maximum value of SAR (measured) = 10.9 mW/g

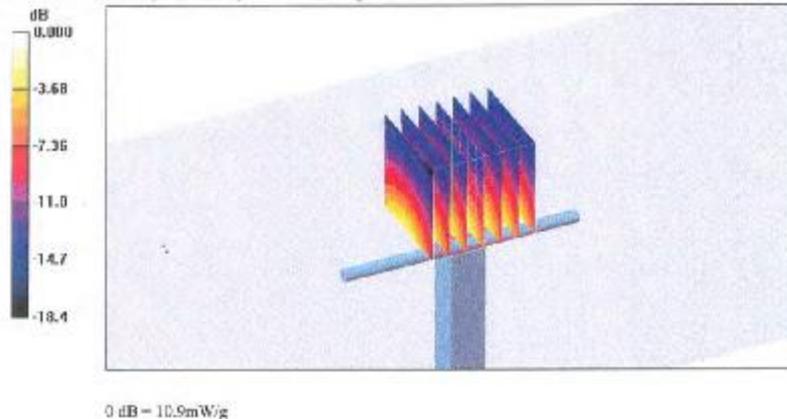

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Impedance Measurement Plot for Head TSL

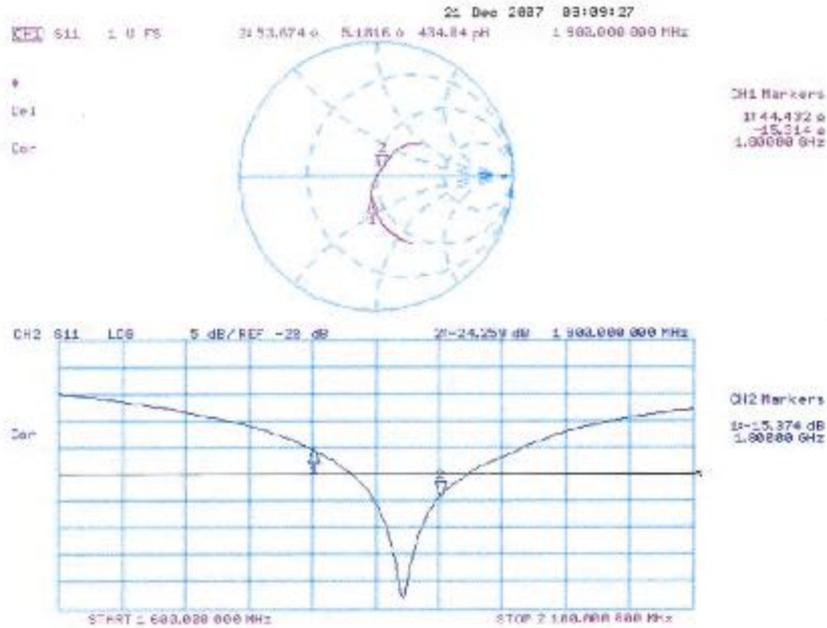

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

SHGSM

DASY4 Validation Report for Body TSL

Date/Time: 21.12.2007 11:05:06

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d028

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U10 BB;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(4.48, 4.48, 4.48); Calibrated: 26.10.2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.01.2007
- Phantom: Flat Phantom 5.0 (back); Type: QD00EP50AA;
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 172

P_{in} = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.3 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 16.0 W/kg


SAR(1 g) = 9.34 mW/g; SAR(10 g) = 4.97 mW/g

Maximum value of SAR (measured) = 10.5 mW/g

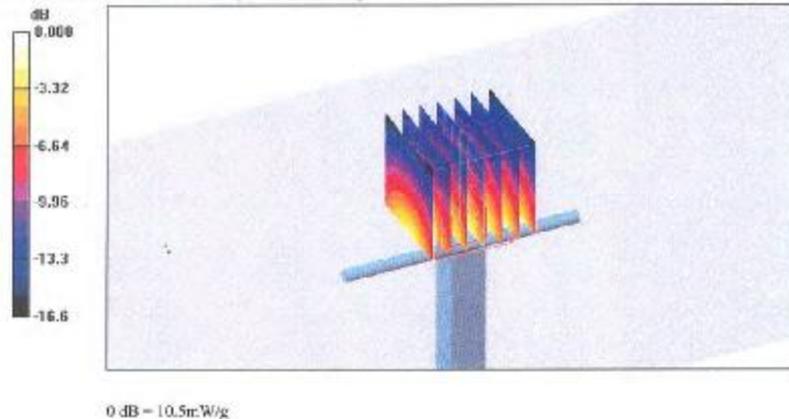

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

Impedance Measurement Plot for Body TSL

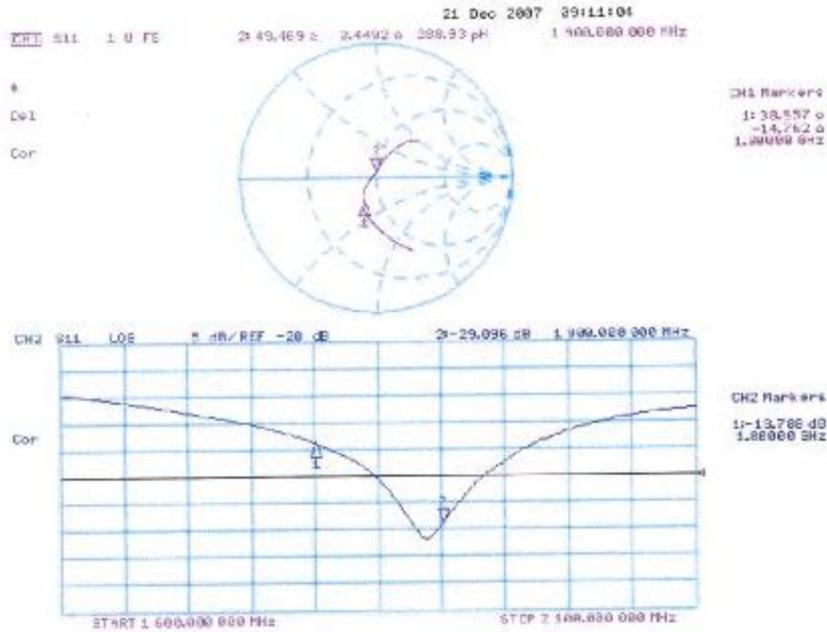

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

8. Uncertainty analysis

Error Description	Tol. (± %)	Prob. dist.	Div.	(c _i) (1g)	(c _i) (10g)	Std. unc. (± %)		(v _i)
Measurement System								
Probe Calibration	4.8	N	1	1	1	4.8	4.8	∞
Axial Isotropy	4.7	R	√3	1	1	2.7	2.7	∞
Hemispherical Isotropy	0	R	√3	1	1	0	0	∞
Boundary Effects	1.0	R	√3	1	1	0.6	0.6	∞
Linearity	4.7	R	√3	1	1	2.7	2.7	∞
System Detection Limit	1.0	R	√3	1	1	0.6	0.6	∞
Readout Electronics	1.0	N	1	1	1	1.0	1.0	∞
Response Time	0	R	√3	1	1	0	0	∞
Integration Time	0	R	√3	1	1	0	0	∞
RF Ambient Conditions	3.0	R	√3	1	1	1.7	1.7	∞
Probe Positioner	0.4	R	√3	1	1	0.2	0.2	∞
Probe Positioning	2.9	R	√3	1	1	1.7	1.7	∞
Algorithms for Max. SAR Eval.	1.0	R	√3	1	1	0.6	0.6	∞
Dipole								
Dipole Axis to Liquid Distance	2.0	R	√3	1	1	1.2	1.2	∞
Input power and SAR drift meas.	4.7	R	√3	1	1	2.7	2.7	∞
Phantom and Tissue Param.								
Phantom Uncertainty	4.0	R	√3	1	1	2.3	2.3	∞
Liquid Conductivity (target)	5.0	R.	√3	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (meas.)	2.5	N	1	0.64	0.43	1.6	1.1	∞
Liquid Permittivity (target)	5.0	R	√3	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (meas.)	2.5	N	1	0.6	0.49	1.5	1.2	∞
Combined Standard Uncertainty						8.4	8.1	∞
Coverage Factor for 95%		kp=2						
Expanded Uncertainty						16.8	16.2	

Dasy4 Uncertainty Budget

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.

9. CNAS Certificate



End of Report

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The result shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 30 days only. This Test Report shall be reproduced except in full, without written approval of the Company.