



Report No.: RZA2010-0605



# OET 65

# TEST REPORT

|                     |                       |
|---------------------|-----------------------|
| <b>Product Name</b> | MF691 HSPA+ USB Modem |
| <b>Model</b>        | MF691                 |
| <b>FCC ID</b>       | Q78-ZTEMF691          |
| <b>Client</b>       | ZTE CORPORATION       |

**TA Technology (Shanghai) Co., Ltd.**



## GENERAL SUMMARY

|                              |  |              |       |
|------------------------------|--|--------------|-------|
| <b>Product Name</b>          | MF691 HSPA+ USB Modem  | <b>Model</b> | MF691 |
| <b>FCC ID</b>                | Q78-ZTEMF691   |              |       |
| <b>Report No.</b>            | RZA2010-0605   |              |       |
| <b>Client</b>                | ZTE CORPORATION  |              |       |
| <b>Manufacturer</b>          | ZTE CORPORATION  |              |       |
| <b>Reference Standard(s)</b> | <p><b>IEEE Std C95.1, 1999:</b> IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.</p> <p><b>SUPPLEMENT C Edition 01-01 to OET BULLETIN 65 Edition 97-01 June 2001 including DA 02-1438, published June 2002:</b> Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields Additional Information for Evaluation Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions</p> <p><b>KDB 447498 D02 -2009.11.13</b></p> |              |       |
| <b>Conclusion</b>            | <p>This portable wireless equipment has been measured in all cases requested by the relevant standards. Test results in Chapter 7 of this test report are below limits specified in the relevant standards.</p> <p>General Judgment: <b>Pass</b></p> <p style="text-align: right;">(Stamp)<br/>Date of issue: April 26<sup>th</sup>, 2010</p>  |              |       |
| <b>Comment</b>               | The test result only responds to the measured sample.  |              |       |

Approved by 杨伟中  
Yang Weizhong

Revised by 凌敏宝  
Ling Minbao

Performed by 李进昌  
Li Jinchang

## TABLE OF CONTENT

|        |  |    |
|--------|--|----|
| 1.     | General Information .....                    | 5  |
| 1.1.   | Notes of the test report .....               | 5  |
| 1.2.   | Testing laboratory .....                     | 5  |
| 1.3.   | Applicant Information .....                  | 6  |
| 1.4.   | Manufacturer Information .....               | 6  |
| 1.5.   | Information of EUT .....                     | 7  |
| 1.6.   | Test Date .....                              | 8  |
| 2.     | Operational Conditions during Test .....     | 9  |
| 2.1.   | General description of test procedures ..... | 9  |
| 2.2.   | GSM Test Configuration .....                 | 9  |
| 2.3.   | WCDMA Test Configuration .....               | 10 |
| 2.4.   | HSDPA Test Configuration .....               | 10 |
| 2.5.   | HSUPA Test Configuration .....               | 12 |
| 2.6.   | Position of module in Portable devices ..... | 14 |
| 2.7.   | Picture of host product .....                | 15 |
| 3.     | SAR Measurements System Configuration .....  | 17 |
| 3.1.   | SAR Measurement Set-up .....                 | 17 |
| 3.2.   | DASY5 E-field Probe System .....             | 18 |
| 3.2.1. | EX3DV4 Probe Specification .....             | 18 |
| 3.2.2. | E-field Probe Calibration .....              | 19 |
| 3.3.   | Other Test Equipment .....                   | 19 |
| 3.3.1. | Device Holder for Transmitters .....         | 19 |
| 3.3.2. | Phantom .....                                | 20 |
| 3.4.   | Scanning procedure .....                     | 20 |
| 3.5.   | Data Storage and Evaluation .....            | 22 |
| 3.5.1. | Data Storage .....                           | 22 |
| 3.5.2. | Data Evaluation by SEMCAD .....              | 22 |
| 3.6.   | System check .....                           | 25 |
| 3.7.   | Equivalent Tissues .....                     | 26 |
| 4.     | Laboratory Environment .....                 | 26 |
| 5.     | Characteristics of the Test .....            | 27 |
| 5.1.   | Applicable Limit Regulations .....           | 27 |
| 5.2.   | Applicable Measurement Standards .....       | 27 |
| 6.     | Conducted Output Power Measurement .....     | 28 |
| 6.1.   | Summary .....                                | 28 |
| 6.2.   | Conducted Power Results .....                | 28 |
| 7.     | Test Results .....                           | 33 |
| 7.1.   | Dielectric Performance .....                 | 33 |
| 7.2.   | System check .....                           | 33 |
| 7.3.   | Summary of Measurement Results .....         | 34 |
| 7.3.1. | GSM 850(GPRS/EGPRS) .....                    | 34 |
| 7.3.2. | GSM 1900(GPRS/EGPRS) .....                   | 36 |
| 7.3.3. | WCDMA Band II (WCDMA/HSDPA/HSUPA) .....      | 38 |

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0605

Page 4 of 145

---

|   |     |
|---|-----|
| 7.3.4. WCDMA Band IV (WCDMA/HSDPA/HSUPA).....             | 40  |
| 7.3.5. WCDMA Band V (WCDMA/HSDPA/HSUPA).....              | 42  |
| 7.4. Conclusion .....                                     | 43  |
| 8. Measurement Uncertainty .....                          | 44  |
| 9. Main Test Instruments .....                            | 45  |
| ANNEX A: Test Layout .....                                | 46  |
| ANNEX B: System Check Results .....                       | 49  |
| ANNEX C: Graph Results .....                              | 52  |
| ANNEX D: Probe Calibration Certificate .....              | 102 |
| ANNEX E: D835V2 Dipole Calibration Certificate .....      | 111 |
| ANNEX F: D1800V2 Dipole Calibration Certificate .....     | 120 |
| ANNEX G: D1900V2 Dipole Calibration Certificate.....      | 129 |
| ANNEX H: DAE4 Calibration Certificate.....                | 137 |
| ANNEX I: The EUT Appearances and Test Configuration ..... | 142 |

## 1. General Information

### 1.1. Notes of the test report

**TA Technology (Shanghai) Co., Ltd.** guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

**TA Technology (Shanghai) Co., Ltd.** is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

### 1.2. Testing laboratory

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Yang Weizhong  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [yangweizhong@ta-shanghai.com](mailto:yangweizhong@ta-shanghai.com)

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0605

Page 6 of 145

---

**1.3. Applicant Information**

Company: ZTE CORPORATION  
Address: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen,  
Guangdong, 518057, P.R.China  
City: Shenzhen  
Postal Code: 518057  
Country: P.R.China  
Contact: Zhang Min  
Telephone: 021-68897541  
Fax: 021-50801070

**1.4. Manufacturer Information**

Company: ZTE CORPORATION  
Address: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen,  
Guangdong, 518057, P.R.China  
City: Shenzhen  
Postal Code: 518057  
Country: P.R.China  
Telephone: 021-68897541  
Fax: 021-50801070

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0605

Page 7 of 145

**1.5. Information of EUT**

**General information**

|                                     |   |                          |                  |
|-------------------------------------|---|--------------------------|------------------|
| Device type :                       | portable device   |                          |                  |
| Exposure category:                  | uncontrolled environment / general population   |                          |                  |
| Name of EUT:                        | MF691 HSPA+ USB Modem   |                          |                  |
| IMEI or SN:                         | 352071040001146   |                          |                  |
| Device operating configurations :   |   |                          |                  |
| Operating mode(s):                  | GSM850; ( tested )<br>GSM1900; ( tested )<br>WCDMA Band II; (tested)<br>WCDMA Band IV; (tested)<br>WCDMA Band V; (tested) |                          |                  |
| Test modulation:                    | (GSM)GMSK, (WCDMA) QPSK   |                          |                  |
| GPRS multislots class :             | 10  |                          |                  |
| EGPRS multislots class:             | 12  |                          |                  |
| HSDPA UE category                   | 14  |                          |                  |
| HSUPA UE category                   | 6   |                          |                  |
| Operating frequency range(s)        | Band  | Tx (MHz)                 | Rx (MHz)         |
|                                     | GSM850  | 824.2 ~ 848.8            | 869.2 ~ 893.8    |
|                                     | GSM1900   | 1850.2 ~ 1909.8          | 1930.2 ~ 1989.8  |
|                                     | WCDMA Band II   | 1852.4 ~ 1907.6          | 1932.4 ~ 1987.6. |
|                                     | WCDMA Band IV   | 1712.4 ~ 1752.6          | 2112.4 ~ 2152.2  |
|                                     | WCDMA Band V  | 826.4 ~ 846.6            | 871.4 ~ 891.6    |
| Power class                         | GSM 850: 4, tested with power level 5   |                          |                  |
|                                     | GSM 1900: 1, tested with power level 0  |                          |                  |
|                                     | WCDMA Band II: 3, tested with maximum output power  |                          |                  |
|                                     | WCDMA Band IV: 3, tested with maximum output power  |                          |                  |
|                                     | WCDMA Band V: 3, tested with maximum output power   |                          |                  |
| Test channel<br>(Low –Middle –High) | 128 - 190 - 251   | (GSM850) (tested)        |                  |
|                                     | 512 - 661 - 810   | (GSM1900) (tested)       |                  |
|                                     | 9262 - 9400 - 9538  | (WCDMA Band II) (tested) |                  |
|                                     | 1312 - 1412 - 1513  | (WCDMA Band IV) (tested) |                  |
|                                     | 4132 - 4183 - 4233  | (WCDMA Band V) (tested)  |                  |
| Hardware version:                   | MF691-3.0.0   |                          |                  |
| Software version:                   | TMO_USA_MF691V1.0.0B04  |                          |                  |
| Antenna type:                       | Internal antenna  |                          |                  |
| Used host products:                 | IBM T61   |                          |                  |
|                                     | Lenovo Y450   |                          |                  |

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0605

Page 8 of 145

---

Equipment Under Test (EUT) is a MF691 HSPA+ USB Modem with internal antenna. The USB plug can rotate from 0-degree to 270-degree. During SAR test of the EUT, it was connected to a portable computer. SAR is tested for the EUT respectively for GSM 850, GSM1900, WCDMA Band II, WCDMA Band IV and WCDMA Band V. The EUT have GPRS (class 10), EGPRS (class 12), and WCDMA/HSDPA/HSUPA functions.

Since the EUT only has the data transfer function, but does not have the voice transfer function, the tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS and EGPRS, the tests in the band of WCDMA Band II, WCDMA Band IV and WCDMA Band V are performed in the mode of WCDMA/HSDPA/HSUPA, The measurements were performed in combination with two different host products (IBM T61, Lenovo Y450). IBM T61 laptop has horizontal USB slot, Lenovo Y450 laptop has vertical USB slot.

The sample undergoing test was selected by the Client.

Components list please refer to documents of the manufacturer.

### **1.6. Test Date**

The test is performed from April 22, 2010 to April 24, 2010.

## **2. Operational Conditions during Test**

### **2.1. General description of test procedures**

Connection to the EUT is established via air interface with E5515C, and the EUT is set to maximum output power by E5515C. The antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30 dB.

Since the EUT only has the data transfer function, but does not have the voice transfer function, the tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS and EGPRS, The tests in the band of WCDMA Band II, WCDMA Band IV and WCDMA Band V are performed in the mode of WCDMA/HSDPA/HSUPA. The measurements were performed in combination with two different host products (IBM T61, Lenovo Y450). IBM T61 laptop has horizontal USB slot, Lenovo Y450 laptop has vertical USB slot.

### **2.2. GSM Test Configuration**

For the body SAR tests for GSM 850, GSM 1900, a communication link is set up with a System Simulator (SS) by air link. The EUT is commanded to operate at maximum transmitting power. Since the EUT only has the data transfer function, but does not have the speech transfer function. The tests in the band of GSM 850, GSM 1900 are only performed in the mode of GPRS and EGPRS. The GPRS class is 10 for this EUT; it has at most 2 timeslots in uplink. The EGPRS class is 12 for this EUT; it has at most 4 timeslots in uplink.

SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following:

**Table 1: The allowed power reduction in the multi-slot configuration**

| <b>Number of timeslots in uplink assignment</b> | <b>Permissible nominal reduction of maximum output power,(dB)</b> |
|---|---|
| 1   | 0   |
| 2   | 0 to 3,0  |
| 3   | 1,8 to 4,8  |
| 4   | 3,0 to 6,0  |

### 2.3. WCDMA Test Configuration

As the SAR body tests for WCDMA Band II, WCDMA Band IV and WCDMA Band V, we established the radio link through call processing. The maximum output power were verified on high, middle and low channels for each test band according to 3GPP TS 34.121 with the following configuration:

- 1) 12.2kbps RMC, 64,144,384 kbps RMC with TPC set to all "all '1's"
- 2) Test loop Mode 1

For the output power, the configurations for the DPCCH and DPDCH<sub>1</sub> are as followed (EUT do not support the DPDCH<sub>2-n</sub>)

**Table 2: The configurations for the DPCCH and DPDCH<sub>1</sub>**

|                    | Channel Bit Rate(kbps) | Channel Symbol Rate(kbps) | Spreading Factor | Spreading Code Number | Bits/Slot |
|--------------------|------------------------|---------------------------|------------------|-----------------------|-----------|
| DPCCH              | 15                     | 15                        | 256              | 0                     | 10        |
| DPDCH <sub>1</sub> | 15                     | 15                        | 256              | 64                    | 10        |
|                    | 30                     | 30                        | 128              | 32                    | 20        |
|                    | 60                     | 60                        | 64               | 16                    | 40        |
|                    | 120                    | 120                       | 32               | 8                     | 80        |
|                    | 240                    | 240                       | 16               | 4                     | 160       |
|                    | 480                    | 480                       | 8                | 2                     | 320       |
|                    | 960                    | 960                       | 4                | 1                     | 640       |

SAR is tested with 12.2kps RMC and not required for other spreading codes (64,144, and 384 kbps RMC) and multiple DPDCH<sub>n</sub>, because the maximum output power for each of these other configurations < 0.25dB higher than 12.2kbps RMC and the multiple DPDCH<sub>n</sub> is not applicable for the EUT.

### 2.4. HSDPA Test Configuration

SAR for body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. In addition, body SAR is also measured for HSDPA when the maximum average output of each RF channel with HSDPA active is at least 1/4 dB higher than that measured without HSDPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to the UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be

# TA Technology (Shanghai) Co., Ltd.

## Test Report

configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors( $\beta_c, \beta_d$ ), and HS-DPCCH power offset parameters( $\Delta_{ACK}, \Delta_{NACK}, \Delta_{CQI}$ ) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

**Table 3: Subtests for UMTS Release 5 HSDPA**

| Sub-set | $\beta_c$         | $\beta_d$         | $\beta_d$<br>(SF) | $\beta_c/\beta_d$ | $\beta_{hs}$<br>(note 1, note 2) | CM(dB)<br>(note 3) | MPR(dB) |
|---------|-------------------|-------------------|-------------------|-------------------|----------------------------------|--------------------|---------|
| 1       | 2/15              | 15/15             | 64                | 2/15              | 4/15                             | 0.0                | 0.0     |
| 2       | 12/15<br>(note 4) | 15/15<br>(note 4) | 64                | 12/15<br>(note 4) | 24/15                            | 1.0                | 0.0     |
| 3       | 15/15             | 8/15              | 64                | 15/8              | 30/15                            | 1.5                | 0.5     |
| 4       | 15/15             | 4/15              | 64                | 15/4              | 30/15                            | 1.5                | 0.5     |

Note1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$   
 Note2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1.A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 8$  ( $A_{hs} = 30/15$ ) with  $\beta_{hs} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 7$  ( $A_{hs} = 24/15$ ) with  $\beta_{hs} = 24/15 * \beta_c$ .  
 Note3: CM=1 for  $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.  
 Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Table 4: Settings of required H-Set 1 QPSK in HSDPA mode**

| Parameter                             | Unit      | Value |
|---------------------------------------|-----------|-------|
| Nominal Avg. Inf. Bit Rate            | kbps      | 534   |
| Inter-TTI Distance                    | TTI's     | 3     |
| Number of HARQ Processes              | Processes | 2     |
| Information Bit Payload ( $N_{INF}$ ) | Bits      | 3202  |
| Number Code Blocks                    | Blocks    | 1     |
| Binary Channel Bits Per TTI           | Bits      | 4800  |
| Total Available SML's in UE           | SML's     | 19200 |
| Number of SML's per HARQ Proc.        | SML's     | 9600  |
| Coding Rate                           | /         | 0.67  |
| Number of Physical Channel Codes      | Codes     | 5     |
| Modulation                            | /         | QPSK  |

**Table 5: HSDPA UE category**

| <b>HS-DSCH Category</b> | <b>Maximum HS-DSCH Codes Received</b> | <b>Minimum Inter-TTI Interval</b> | <b>Maximum Transport Bits/HS-DSCH</b> | <b>Total Channel</b> |
|-------------------------|---------------------------------------|-----------------------------------|---------------------------------------|----------------------|
| 1                       | 5                                     | 3                                 | 7298                                  | 19200                |
| 2                       | 5                                     | 3                                 | 7298                                  | 28800                |
| 3                       | 5                                     | 2                                 | 7298                                  | 28800                |
| 4                       | 5                                     | 2                                 | 7298                                  | 38400                |
| 5                       | 5                                     | 1                                 | 7298                                  | 57600                |
| 6                       | 5                                     | 1                                 | 7298                                  | 67200                |
| 7                       | 10                                    | 1                                 | 14411                                 | 115200               |
| 8                       | 10                                    | 1                                 | 14411                                 | 134400               |
| 9                       | 15                                    | 1                                 | 25251                                 | 172800               |
| 10                      | 15                                    | 1                                 | 27952                                 | 172800               |
| 11                      | 5                                     | 2                                 | 3630                                  | 14400                |
| 12                      | 5                                     | 1                                 | 3630                                  | 28800                |
| 13                      | 15                                    | 1                                 | 34800                                 | 259200               |
| 14                      | 15                                    | 1                                 | 42196                                 | 259200               |
| 15                      | 15                                    | 1                                 | 23370                                 | 345600               |
| 16                      | 15                                    | 1                                 | 27952                                 | 345600               |

## 2.5. HSUPA Test Configuration

Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least ¼ dB higher than that measured without HSPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA.<sup>40</sup>

Due to inner loop power control requirements in HSPA, a commercial communication test set should be used for the output power and SAR tests.<sup>41</sup> The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA should be configured according to the  $\beta$  values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of 3 G device.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0605

Page 13 of 145

**Table 6: Sub-Test 5 Setup for Release 6 HSUPA**

| Sub-set | $\beta_c$            | $\beta_d$            | $\beta_d$ (SF) | $\beta_c/\beta_d$    | $\beta_{hs}^{(1)}$ | $\beta_{ec}$ | $\beta_{ed}$                                   | $\beta_{ed}$ (SF) | $\beta_{ed}$ (codes) | CM <sup>(2)</sup> (dB) | MPR (dB) | AG <sup>(4)</sup> Index | E-TFCI |
|---------|----------------------|----------------------|----------------|----------------------|--------------------|--------------|--|-------------------|----------------------|------------------------|----------|-------------------------|--------|
| 1       | 11/15 <sup>(3)</sup> | 15/15 <sup>(3)</sup> | 64             | 11/15 <sup>(3)</sup> | 22/15              | 209/225      | 1039/225                                       | 4                 | 1                    | 1.0                    | 0.0      | 20                      | 75     |
| 2       | 6/15                 | 15/15                | 64             | 6/15                 | 12/15              | 12/15        | 94/75  | 4                 | 1                    | 3.0                    | 2.0      | 12                      | 67     |
| 3       | 15/15                | 9/15                 | 64             | 15/9                 | 30/15              | 30/15        | $\beta_{ed1}$ : 47/15<br>$\beta_{ed2}$ : 47/15 | 4                 | 2                    | 2.0                    | 1.0      | 15                      | 92     |
| 4       | 2/15                 | 15/15                | 64             | 2/15                 | 4/15               | 2/15         | 56/75  | 4                 | 1                    | 3.0                    | 2.0      | 17                      | 71     |
| 5       | 15/15 <sup>(4)</sup> | 15/15 <sup>(4)</sup> | 64             | 15/15 <sup>(4)</sup> | 30/15              | 24/15        | 134/15   | 4                 | 1                    | 1.0                    | 0.0      | 21                      | 81     |

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.

Note 6:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

**Table 7: HSUPA UE category**

| UE E-DCH Category | Maximum E-DCH Codes Transmitted | Number of HARQ Processes | E-DCH TTI (ms) | Minimum Spreading Factor | Maximum E-DCH Transport Block Bits | Max Rate (Mbps) |
|-------------------|---------------------------------|--------------------------|----------------|--------------------------|------------------------------------|-----------------|
| 1                 | 1                               | 4                        | 10             | 4                        | 7110                               | 0.7296          |
| 2                 | 2                               | 8                        | 2              | 4                        | 2798                               | 1.4592          |
|                   | 2                               | 4                        | 10             | 4                        | 14484                              |                 |
| 3                 | 2                               | 4                        | 10             | 4                        | 14484                              | 1.4592          |
| 4                 | 2                               | 8                        | 2              | 2                        | 5772                               | 2.9185          |
|                   | 2                               | 4                        | 10             | 2                        | 20000                              | 2.00            |
| 5                 | 2                               | 4                        | 10             | 2                        | 20000                              | 2.00            |
| 6<br>(No DPDCH)   | 4                               | 8                        | 2              | 2 SF2 & 2 SF4            | 11484                              | 5.76            |
|                   | 4                               | 4                        | 10             |                          | 20000                              | 2.00            |
| 7<br>(No DPDCH)   | 4                               | 8                        | 2              | 2 SF2 & 2 SF4            | 22996                              | ?               |
|                   | 4                               | 4                        | 10             |                          | 20000                              | ?               |

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4.

UE Categories 1 to 6 supports QPSK only. UE Category 7 supports QPSK and 16QAM. (TS25.306-7.3.0)

## **2.6. Position of module in Portable devices**

The measurements were performed in combination with two host products (IBM T61, Lenovo Y450). IBM T61 laptop has horizontal USB slot, Lenovo Y450 laptop has vertical USB slot.

A test distance of 5mm or less, according to KDB 447498 D02 -2009.11.13, should be considered for the orientation that can satisfy such requirements.

For each channel, the EUT is tested at the following 5 test positions:

- Test Position 1: The EUT is connected to the portable computer with horizontal USB slot. the back side of the EUT towards the bottom of the flat phantom. (ANNEX I Picture 7)
- Test Position 2: The EUT is connected to the portable computer through a 19 cm USB cable. The front side of the EUT towards the bottom of the flat phantom. (ANNEX I Picture 8)
- Test Position 3: The EUT is connected to the portable computer with horizontal USB slot. The Top side of the EUT towards the bottom of the flat phantom. (ANNEX I Picture 9)
- Test Position 4: The EUT is connected to the portable computer through a 19 cm USB cable. The left side of the EUT towards the bottom of the flat phantom. (ANNEX I Picture 10)
- Test Position 5: The EUT is connected to the portable computer with vertical USB slot. the right side of the EUT towards the bottom of the flat phantom. (ANNEX I Picture 11)

## 2.7. Picture of host product

During the test, IBM T61 and Lenovo Y450 laptops were used as an assistant to help to setup communication. (See Picture 1)



Picture 1-a: IBM T61 Close



Picture 1-b: IBM T61 Open



Picture 1-c: Lenovo Y450 Close



Picture 1-d: Lenovo Y450 Open



Picture 1-e: IBM T61 with horizontal USB slot



Picture 1-f: Lenovo Y450 with Vertical USB slot



Picture 1-g: a 19 cm USB cable

**Picture 1: Computer as a test assistant**

### 3. SAR Measurements System Configuration

#### 3.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

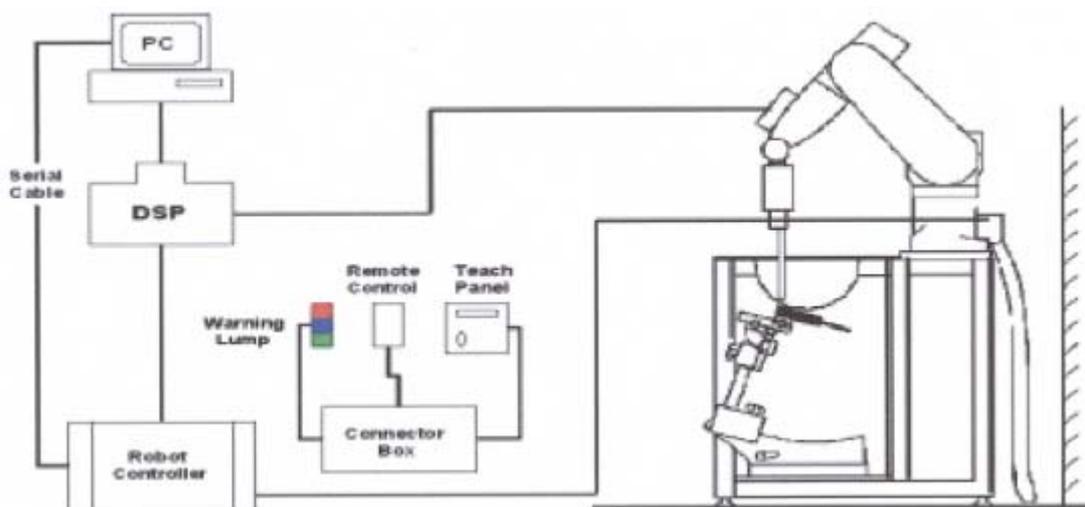


Figure 1. SAR Lab Test Measurement Set-up

### 3.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

#### 3.2.1. EX3DV4 Probe Specification

|               |  |
|---------------|--|
| Construction  | Symmetrical design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE)  |
| Calibration   | Basic Broad Band Calibration in air<br>Conversion Factors (CF) for HSL 900 and HSL 1750<br>Additional CF for other liquids and frequencies upon request  |
| Frequency     | 10 MHz to > 6 GHz<br>Linearity: $\pm 0.2$ dB<br>(30 MHz to 6 GHz)  |
| Directivity   | $\pm 0.3$ dB in HSL (rotation around probe axis)<br>$\pm 0.5$ dB in tissue material (rotation normal to probe axis)  |
| Dynamic Range | 10 $\mu$ W/g to > 100 mW/g Linearity:<br>$\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)   |
| Dimensions    | Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm   |
| Application   | High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%. |



Figure 2. EX3DV4 E-field Probe



Figure 3. EX3DV4 E-field probe

### 3.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ . The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t$  = Exposure time (30 seconds),  
C = Heat capacity of tissue (brain or muscle),  
 $\Delta T$  = Temperature increase due to RF exposure.  
Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:  
 $\sigma$  = Simulated tissue conductivity,  
 $\rho$  = Tissue density (kg/m<sup>3</sup>).

### 3.3. Other Test Equipment

#### 3.3.1. Device Holder for Transmitters

**Construction:** Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.) It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI4 and SAM v6.0 Phantoms.

**Material:** POM, Acrylic glass, Foam

### 3.3.2. Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden Figure. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

|                 |                                 |
|-----------------|---------------------------------|
| Shell Thickness | 2±0.1 mm                        |
| Filling Volume  | Approx. 20 liters               |
| Dimensions      | 810 x 1000 x 500 mm (H x L x W) |
| Available       | Special                         |



**Figure 4. Generic Twin Phantom**

### 3.4. Scanning procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max.  $\pm 5\%$ .
- The "surface check" measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)
- Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 10 mm x 10 mm is set. During the scan the distance of the probe to the phantom remains

unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

- **Zoom Scan**

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

- **Spatial Peak Detection**

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space.

They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

### **3.5. Data Storage and Evaluation**

#### **3.5.1. Data Storage**

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA5". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm<sup>2</sup>], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

#### **3.5.2. Data Evaluation by SEMCAD**

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

|                    |                           |  |
|--------------------|---------------------------|--|
| Probe parameters:  | - Sensitivity             | Normi, a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub> |
|                    | - Conversion factor       | ConvF <sub>i</sub>   |
|                    | - Diode compression point | Dcp <sub>i</sub>   |
| Device parameters: | - Frequency               | f  |
|                    | - Crest factor            | cf   |
| Media parameters:  | - Conductivity            |  |
|                    | - Density                 |  |

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With  $V_i$  = compensated signal of channel i (i = x, y, z)

$U_i$  = input signal of channel i (i = x, y, z)

$cf$  = crest factor of exciting field (DASY parameter)

$dcp_i$  = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:  $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes:  $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$

With  $V_i$  = compensated signal of channel i (i = x, y, z)

$Norm_i$  = sensor sensitivity of channel i (i = x, y, z)  
[mV/(V/m)<sup>2</sup>] for E-field Probes

$ConvF$  = sensitivity enhancement in solution

$a_{ij}$  = sensor sensitivity factors for H-field probes

$f$  = carrier frequency [GHz]

$E_i$  = electric field strength of channel i in V/m

$H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \rho) / ( \cdot 1000)$$

with  $SAR$  = local specific absorption rate in mW/g

**$E_{tot}$**  = total field strength in V/m

$\sigma$  = conductivity in [mho/m] or [Siemens/m]

$\rho$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with  $P_{pwe}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>

**$E_{tot}$**  = total electric field strength in V/m

**$H_{tot}$**  = total magnetic field strength in A/m

### 3.6. System check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyzer. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the table 12.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ( $\pm 10\%$ ).

System check is performed regularly on all frequency bands where tests are performed with the DASY 4 system.

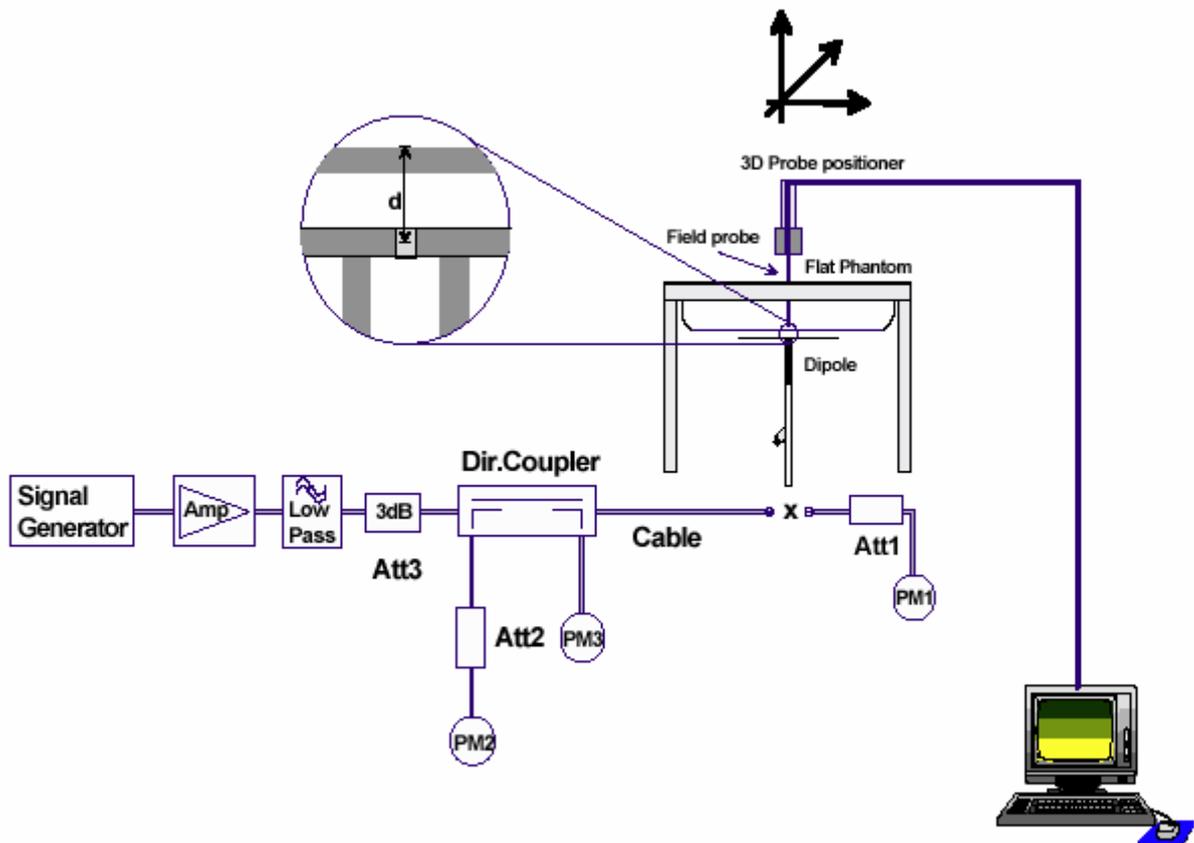


Figure 5. System Check Set-up

### 3.7. Equivalent Tissues

The liquid is consisted of water, sugar, salt, Glycol monobutyl, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 8 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by OET 65.

**Table 8: Composition of the Body Tissue Equivalent Matter**

| MIXTURE%                                      | FREQUENCY(Body)835MHz |                                   |                                 |
|---|-----------------------|-----------------------------------|---------------------------------|
| Water   | 52.5                  |                                   |                                 |
| Sugar   | 45                    |                                   |                                 |
| Salt  | 1.4                   |                                   |                                 |
| Preventol                                     | 0.1                   |                                   |                                 |
| Cellulose                                     | 1.0                   |                                   |                                 |
| <b>Dielectric Parameters<br/>Target Value</b> | <b>f=835MHz</b>       | <b><math>\epsilon=55.2</math></b> | <b><math>\sigma=0.97</math></b> |

| MIXTURE%                                      | FREQUENCY(Body)1750MHz |                                   |                                 |
|---|------------------------|-----------------------------------|---------------------------------|
| Water   | 69.91                  |                                   |                                 |
| Glycol  | 29.96                  |                                   |                                 |
| Salt  | 0.13                   |                                   |                                 |
| <b>Dielectric Parameters<br/>Target Value</b> | <b>f=1750MHz</b>       | <b><math>\epsilon=53.4</math></b> | <b><math>\sigma=1.49</math></b> |

| MIXTURE%                                      | FREQUENCY (Body) 1900MHz |                                   |                                 |
|---|--------------------------|-----------------------------------|---------------------------------|
| Water   | 69.91                    |                                   |                                 |
| Glycol monobutyl                              | 29.96                    |                                   |                                 |
| Salt  | 0.13                     |                                   |                                 |
| <b>Dielectric Parameters<br/>Target Value</b> | <b>f=1900MHz</b>         | <b><math>\epsilon=53.3</math></b> | <b><math>\sigma=1.52</math></b> |

## 4. Laboratory Environment

**Table 9: The Ambient Conditions during Test**

|   |                           |
|---|---------------------------|
| Temperature   | Min. = 20°C, Max. = 25 °C |
| Relative humidity   | Min. = 30%, Max. = 70%    |
| Ground system resistance  | < 0.5 $\Omega$            |
| Ambient noise is checked and found very low and in compliance with requirement of standards.    |                           |
| Reflection of surrounding objects is minimized and in compliance with requirement of standards. |                           |

## **5. Characteristics of the Test**

### **5.1. Applicable Limit Regulations**

**IEEE Std C95.1, 1999:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

### **5.2. Applicable Measurement Standards**

**SUPPLEMENT C Edition 01-01 to OET BULLETIN 65 Edition 97-01 June 2001 including DA 02-1438, published June 2002:** Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields Additional Information for Evaluation Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions

**KDB 447498 D02 -2009.11.13**

## 6. Conducted Output Power Measurement

### 6.1. Summary

The DUT is tested using an E5515C communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted power. Conducted output power was measured using an integrated RF connector and attached RF cable. This result contains conducted output power for the EUT.

### 6.2. Conducted Power Results

**Table 10: Conducted Power Measurement Results**

| <b>GSM 850+GPRS</b>  |                   | <b>Average Power</b>   |       |       |         |              |              |              |
|----------------------|-------------------|------------------------|-------|-------|---------|--------------|--------------|--------------|
|                      |                   | <b>Conducted Power</b> |       |       |         |              |              |              |
|                      |                   | CH128                  | CH190 | CH251 |         | CH128        | CH190        | CH251        |
| 1 timeslot           | Before Test (dBm) | 32.02                  | 32.03 | 32.33 | -9.03dB | <b>22.99</b> | <b>23.00</b> | <b>23.30</b> |
|                      | After Test (dBm)  | 32.01                  | 32.02 | 32.32 | -9.03dB | 22.98        | 22.99        | 23.29        |
| 2 timeslots          | Before Test (dBm) | 29.00                  | 29.02 | 29.15 | -6.02dB | 22.98        | 23.00        | 23.13        |
|                      | After Test (dBm)  | 29.01                  | 29.01 | 29.14 | -6.01dB | 22.99        | 22.99        | 23.12        |
| <b>GSM 850+EGPRS</b> |                   | <b>Conducted Power</b> |       |       |         |              |              |              |
|                      |                   | CH128                  | CH190 | CH251 |         | CH128        | CH190        | CH251        |
| 1 timeslot           | Before Test (dBm) | 32.08                  | 32.02 | 32.25 | -9.03dB | <b>23.05</b> | <b>22.99</b> | <b>23.22</b> |
|                      | After Test (dBm)  | 32.07                  | 32.01 | 32.24 | -9.03dB | 23.04        | 22.98        | 23.21        |
| 2 timeslots          | Before Test (dBm) | 29.05                  | 28.94 | 29.08 | -6.02dB | 23.03        | 22.92        | 23.06        |
|                      | After Test (dBm)  | 29.04                  | 28.93 | 29.07 | -6.02dB | 23.02        | 22.91        | 23.05        |
| 3 timeslots          | Before Test (dBm) | 27.25                  | 27.16 | 27.21 | -4.26dB | 22.99        | 22.90        | 22.95        |
|                      | After Test (dBm)  | 27.24                  | 27.15 | 27.20 | -4.26dB | 22.98        | 22.89        | 22.94        |
| 4 timeslots          | Before Test (dBm) | 26.03                  | 25.94 | 26.01 | -3.01dB | 23.02        | 22.93        | 23.00        |
|                      | After Test (dBm)  | 26.02                  | 25.93 | 26.00 | -3.01dB | 23.01        | 22.92        | 22.99        |
| <b>GSM 1900+GPRS</b> |                   | <b>Conducted Power</b> |       |       |         |              |              |              |
|                      |                   | CH512                  | CH661 | CH810 |         | CH512        | CH661        | CH810        |
| 1 timeslot           | Before Test (dBm) | 29.06                  | 29.34 | 29.18 | -9.03dB | 20.03        | 20.31        | 20.15        |
|                      | After Test (dBm)  | 29.05                  | 29.33 | 29.17 | -9.03dB | 20.02        | 20.30        | 20.14        |
| 2 timeslots          | Before Test (dBm) | 26.08                  | 26.35 | 26.25 | -6.02dB | <b>20.06</b> | <b>20.33</b> | <b>20.23</b> |

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0605

Page 29 of 145

|                       |                   | After Test (dBm)       | 26.07 | 26.34 | 26.24   | -6.02dB      | 20.05        | 20.32        | 20.22 |
|-----------------------|-------------------|------------------------|-------|-------|---------|--------------|--------------|--------------|-------|
| <b>GSM 1900+EGPRS</b> |                   | <b>Conducted Power</b> |       |       |         |              |              |              |       |
|                       |                   | CH512                  | CH661 | CH810 |         | CH512        | CH661        | CH810        |       |
| 1 timeslot            | Before Test (dBm) | 28.99                  | 29.25 | 29.09 | -9.03dB | 19.96        | 20.22        | 20.06        |       |
|                       | After Test (dBm)  | 28.98                  | 29.24 | 29.08 | -9.03dB | 19.95        | 20.21        | 20.05        |       |
| 2 timeslots           | Before Test (dBm) | 26.01                  | 26.28 | 26.18 | -6.02dB | 19.99        | 20.26        | 20.16        |       |
|                       | After Test (dBm)  | 26.00                  | 26.27 | 26.17 | -6.02dB | 19.98        | 20.25        | 20.15        |       |
| 3 timeslots           | Before Test (dBm) | 24.15                  | 24.43 | 24.32 | -4.26dB | 19.89        | 20.17        | 20.06        |       |
|                       | After Test (dBm)  | 24.14                  | 24.42 | 24.31 | -4.26dB | 19.88        | 20.16        | 20.05        |       |
| 4 timeslots           | Before Test (dBm) | 23.03                  | 23.27 | 23.18 | -3.01dB | <b>20.02</b> | <b>20.26</b> | <b>20.17</b> |       |
|                       | After Test (dBm)  | 23.02                  | 23.26 | 23.17 | -3.01dB | 20.01        | 20.25        | 20.16        |       |

Note:

1. Division Factor

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots

=>conducted power divided by (8/1) =>-9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots

=>conducted power divided by (8/2) =>-6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots

=>conducted power divided by (8/3) =>-4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots

=>conducted power divided by (8/4) =>-3.01dB

| <b>WCDMA Band II</b>       |                   | <b>Conducted Power</b> |              |              |
|----------------------------|-------------------|------------------------|--------------|--------------|
|                            |                   | Channel 9262           | Channel 9400 | Channel 9538 |
|                            |                   | (1852.4MHz)            | (1880MHz)    | (1907.6MHz)  |
| 12.2kbps<br>RMC            | Before Test (dBm) | 21.98                  | 22.05        | 21.74        |
|                            | After Test (dBm)  | 21.97                  | 22.04        | 21.73        |
| 64kbps<br>RMC              | Before Test (dBm) | 21.96                  | 22.03        | 21.72        |
|                            | After Test (dBm)  | 21.95                  | 22.02        | 21.71        |
| 144kbps<br>RMC             | Before Test (dBm) | 21.94                  | 22.01        | 21.7         |
|                            | After Test (dBm)  | 21.93                  | 22           | 21.69        |
| 384kbps<br>RMC             | Before Test (dBm) | 21.92                  | 21.99        | 21.68        |
|                            | After Test (dBm)  | 21.91                  | 21.98        | 21.67        |
| <b>WCDMA Band II+HSDPA</b> |                   | <b>Conducted Power</b> |              |              |

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0605

Page 30 of 145

|                            |                   | Channel 9262           | Channel 9400 | Channel 9538 |
|----------------------------|-------------------|------------------------|--------------|--------------|
|                            |                   | (1852.4MHz)            | (1880MHz)    | (1907.6MHz)  |
| Sub Test - 1               | Before Test (dBm) | 21.98                  | 22.03        | 21.6         |
|                            | After Test (dBm)  | 21.97                  | 22.02        | 21.61        |
| Sub Test - 2               | Before Test (dBm) | 21.93                  | 22.01        | 21.54        |
|                            | After Test (dBm)  | 21.92                  | 22.00        | 21.53        |
| Sub Test - 3               | Before Test (dBm) | 21.47                  | 21.54        | 21.07        |
|                            | After Test (dBm)  | 21.46                  | 21.53        | 21.06        |
| Sub Test - 4               | Before Test (dBm) | 21.41                  | 21.55        | 21.02        |
|                            | After Test (dBm)  | 21.40                  | 21.54        | 21.01        |
| <b>WCDMA Band II+HSUPA</b> |                   | <b>Conducted Power</b> |              |              |
|                            |                   | Channel 9262           | Channel 9400 | Channel 9538 |
|                            |                   | (1852.4MHz)            | (1880MHz)    | (1907.6MHz)  |
| Sub Test - 1               | Before Test (dBm) | 19.8                   | 20.11        | 19.49        |
|                            | After Test (dBm)  | 19.81                  | 20.12        | 19.48        |
| Sub Test - 2               | Before Test (dBm) | 19.71                  | 19.89        | 19.45        |
|                            | After Test (dBm)  | 19.70                  | 19.88        | 19.44        |
| Sub Test - 3               | Before Test (dBm) | 20.05                  | 19.95        | 19.85        |
|                            | After Test (dBm)  | 20.04                  | 19.94        | 19.84        |
| Sub Test - 4               | Before Test (dBm) | 19.85                  | 19.89        | 19.75        |
|                            | After Test (dBm)  | 19.84                  | 19.88        | 19.74        |
| Sub Test - 5               | Before Test (dBm) | 19.89                  | 20.01        | 19.89        |
|                            | After Test (dBm)  | 19.88                  | 20.00        | 19.88        |
| <b>WCDMA Band IV</b>       |                   | <b>Conducted Power</b> |              |              |
|                            |                   | Channel 1312           | Channel 1412 | Channel 1513 |
|                            |                   | (1712.4MHz)            | (1732.4MHz)  | (1752.6MHz)  |
| 12.2kbps RMC               | Before Test (dBm) | 22.13                  | 22.02        | 21.95        |
|                            | After Test (dBm)  | 22.12                  | 22.01        | 21.94        |
| 64kbps RMC                 | Before Test (dBm) | 22.11                  | 22           | 21.93        |
|                            | After Test (dBm)  | 22.1                   | 21.99        | 21.92        |
| 144kbps RMC                | Before Test (dBm) | 22.09                  | 21.98        | 21.91        |
|                            | After Test (dBm)  | 22.08                  | 21.97        | 21.9         |
| 384kbps RMC                | Before Test (dBm) | 22.07                  | 21.96        | 21.89        |
|                            | After Test (dBm)  | 22.06                  | 21.95        | 21.88        |
| <b>WCDMA Band IV+HSDPA</b> |                   | <b>Conducted Power</b> |              |              |

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0605

Page 31 of 145

|                            |                   | Channel 1312           | Channel 1412 | Channel 1513 |
|----------------------------|-------------------|------------------------|--------------|--------------|
|                            |                   | (1712.4MHz)            | (1732.4MHz)  | (1752.6MHz)  |
| Sub Test - 1               | Before Test (dBm) | 21.97                  | 22.01        | 21.93        |
|                            | After Test (dBm)  | 21.96                  | 22.00        | 21.92        |
| Sub Test - 2               | Before Test (dBm) | 22.05                  | 21.92        | 21.81        |
|                            | After Test (dBm)  | 22.04                  | 21.91        | 21.80        |
| Sub Test - 3               | Before Test (dBm) | 21.55                  | 21.44        | 21.33        |
|                            | After Test (dBm)  | 21.54                  | 21.43        | 21.32        |
| Sub Test - 4               | Before Test (dBm) | 21.67                  | 21.43        | 21.28        |
|                            | After Test (dBm)  | 21.66                  | 21.42        | 21.27        |
| <b>WCDMA Band IV+HSUPA</b> |                   | <b>Conducted Power</b> |              |              |
|                            |                   | Channel 1312           | Channel 1412 | Channel 1513 |
|                            |                   | (1712.4MHz)            | (1732.4MHz)  | (1752.6MHz)  |
| Sub Test - 1               | Before Test (dBm) | 19.99                  | 20.13        | 20.09        |
|                            | After Test (dBm)  | 19.98                  | 20.12        | 20.08        |
| Sub Test - 2               | Before Test (dBm) | 19.76                  | 19.77        | 19.92        |
|                            | After Test (dBm)  | 19.75                  | 19.76        | 19.91        |
| Sub Test - 3               | Before Test (dBm) | 20.01                  | 19.98        | 20.05        |
|                            | After Test (dBm)  | 20.00                  | 19.97        | 20.04        |
| Sub Test - 4               | Before Test (dBm) | 19.99                  | 19.86        | 19.96        |
|                            | After Test (dBm)  | 19.98                  | 19.85        | 19.95        |
| Sub Test - 5               | Before Test (dBm) | 19.98                  | 19.99        | 19.99        |
|                            | After Test (dBm)  | 19.97                  | 19.98        | 19.98        |
| <b>WCDMA Band V</b>        |                   | <b>Conducted Power</b> |              |              |
|                            |                   | Channel 4132           | Channel 4182 | Channel 4233 |
|                            |                   | (826.4MHz)             | (836.4MHz)   | (846.6MHz)   |
| 12.2kbps RMC               | Before Test (dBm) | 21.58                  | 21.54        | 21.52        |
|                            | After Test (dBm)  | 21.57                  | 21.53        | 21.51        |
| 64kbps RMC                 | Before Test (dBm) | 21.56                  | 21.52        | 21.5         |
|                            | After Test (dBm)  | 21.55                  | 21.51        | 21.49        |
| 144kbps RMC                | Before Test (dBm) | 21.54                  | 21.5         | 21.48        |
|                            | After Test (dBm)  | 21.53                  | 21.49        | 21.47        |
| 384kbps RMC                | Before Test (dBm) | 21.52                  | 21.48        | 21.46        |
|                            | After Test (dBm)  | 21.51                  | 21.47        | 21.45        |
| <b>WCDMA Band V+HSDPA</b>  |                   | <b>Conducted Power</b> |              |              |

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0605

Page 32 of 145

|                           |                   | Channel 4132           | Channel 4182 | Channel 4233 |
|---------------------------|-------------------|------------------------|--------------|--------------|
|                           |                   | (826.4MHz)             | (836.4MHz)   | (846.6MHz)   |
| Sub Test - 1              | Before Test (dBm) | 21.45                  | 21.43        | 21.50        |
|                           | After Test (dBm)  | 21.44                  | 21.42        | 21.51        |
| Sub Test - 2              | Before Test (dBm) | 21.55                  | 21.50        | 21.51        |
|                           | After Test (dBm)  | 21.54                  | 21.51        | 21.50        |
| Sub Test - 3              | Before Test (dBm) | 21.37                  | 21.20        | 21.14        |
|                           | After Test (dBm)  | 21.36                  | 21.21        | 21.13        |
| Sub Test - 4              | Before Test (dBm) | 21.39                  | 21.23        | 21.08        |
|                           | After Test (dBm)  | 21.38                  | 21.22        | 21.07        |
| <b>WCDMA Band V+HSUPA</b> |                   | <b>Conducted Power</b> |              |              |
|                           |                   | Channel 4132           | Channel 4182 | Channel 4233 |
|                           |                   | (826.4MHz)             | (836.4MHz)   | (846.6MHz)   |
| Sub Test - 1              | Before Test (dBm) | 19.89                  | 19.88        | 19.84        |
|                           | After Test (dBm)  | 19.88                  | 19.87        | 19.83        |
| Sub Test - 2              | Before Test (dBm) | 19.52                  | 19.68        | 19.64        |
|                           | After Test (dBm)  | 19.51                  | 19.67        | 19.63        |
| Sub Test - 3              | Before Test (dBm) | 19.88                  | 19.89        | 19.85        |
|                           | After Test (dBm)  | 19.87                  | 19.88        | 19.84        |
| Sub Test - 4              | Before Test (dBm) | 19.67                  | 19.53        | 19.43        |
|                           | After Test (dBm)  | 19.66                  | 19.52        | 19.42        |
| Sub Test - 5              | Before Test (dBm) | 19.88                  | 19.79        | 19.69        |
|                           | After Test (dBm)  | 19.87                  | 19.78        | 19.68        |

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

## 7. Test Results

### 7.1. Dielectric Performance

**Table 11: Dielectric Performance of Body Tissue Simulating Liquid**

| Frequency         | Description                    | Dielectric Parameters  |                     | Temp<br>°C |
|-------------------|--------------------------------|------------------------|---------------------|------------|
|                   |                                | $\epsilon_r$           | $\sigma$ (s/m)      |            |
| 835MHz<br>(body)  | Target value<br>±5% window     | 55.20<br>52.44 — 57.96 | 0.97<br>0.92 — 1.02 | /          |
|                   | Measurement value<br>2010-4-23 | 54.00                  | 0.99                | 21.5       |
| 1750MHz<br>(body) | Target value<br>±5% window     | 53.40<br>50.73 — 56.07 | 1.49<br>1.42 — 1.56 | /          |
|                   | Measurement value<br>2010-4-24 | 52.51                  | 1.54                | 21.7       |
| 1900MHz<br>(body) | Target value<br>±5% window     | 53.30<br>50.64 — 55.97 | 1.52<br>1.44 — 1.60 | /          |
|                   | Measurement value<br>2010-4-22 | 52.58                  | 1.52                | 21.7       |

### 7.2. System check

**Table 12: System check**

| Frequency | Description                       | SAR(W/kg)           |                       | Dielectric Parameters |                | Temp<br>°C |
|-----------|-----------------------------------|---------------------|-----------------------|-----------------------|----------------|------------|
|           |                                   | 10g                 | 1g                    | $\epsilon_r$          | $\sigma$ (s/m) |            |
| 835MHz    | Recommended result<br>±10% window | 1.68<br>1.51 - 1.85 | 2.56<br>2.30 - 2.82   | 53                    | 0.99           | /          |
|           | Measurement value<br>2010-4-23    | 1.57                | 2.38                  | 54.00                 | 0.99           | 21.9       |
| 1800 MHz  | Recommended result<br>±10% window | 4.97<br>4.47 — 5.47 | 9.31<br>8.38 — 10.24  | 54.2                  | 1.49           | /          |
|           | Measurement value<br>2010-4-24    | 5.25                | 10.1                  | 52.51                 | 1.54           | 22.1       |
| 1900 MHz  | Recommended result<br>±10% window | 5.52<br>4.97—6.07   | 10.50<br>9.45 — 11.55 | 54                    | 1.55           | /          |
|           | Measurement value<br>2010-4-22    | 5.12                | 10.01                 | 52.58                 | 1.52           | 21.7       |

Note: 1. The graph results see ANNEX B.

2. Target Values used derive from the calibration certificate and 250 mW is used as feeding power to the Calibrated dipole.

### 7.3. Summary of Measurement Results

#### 7.3.1. GSM 850(GPRS/EGPRS)

**Table 13: SAR Values [GSM850 (GPRS/EGPRS)]**

| Limit of SAR (W/kg)                           |                     |         | 10 g Average              | 1g Average      | Power Drift(dB) | Graph Results |
|---|---------------------|---------|---------------------------|-----------------|-----------------|---------------|
|   |                     |         | 2.0                       | 1.6             | ± 0.21          |               |
| Test Case Of Body                             |                     |         | Measurement Result (W/kg) |                 | Power Drift(dB) |               |
| Different Test Position                       | Different Timeslots | Channel | 10 g Average              | 1 g Average     | Power Drift(dB) |               |
| <b>IBM T61</b>                                |                     |         |                           |                 |                 |               |
| Test Position 1                               | 1 timeslot          | Middle  | 0.371(max.cube)           | 0.644(max.cube) | -0.003          | Figure 9      |
| Test Position 2                               | 1 timeslot          | Middle  | 0.450                     | 0.739           | -0.115          | Figure 10     |
| Test Position 3                               | 1 timeslot          | Middle  | 0.136                     | 0.460           | -0.060          | Figure 11     |
| <b>Lenovo Y450</b>                            |                     |         |                           |                 |                 |               |
| Test Position 4                               | 1 timeslot          | Middle  | 0.386                     | 0.638           | -0.064          | Figure 12     |
| Test Position 5                               | 1 timeslot          | High    | 0.429                     | 0.909           | 0.038           | Figure 13     |
|   |                     | Middle  | 0.361                     | 0.748           | -0.055          | Figure 14     |
|   |                     | Low     | 0.293(max.cube)           | 0.580(max.cube) | -0.127          | Figure 15     |
| <b>Worst case position of GPRS with EGPRS</b> |                     |         |                           |                 |                 |               |
| Test Position 5                               | 1 timeslot          | High    | 0.426                     | 0.909           | -0.062          | Figure 16     |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst case.
4. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above; the value from the second assessed cube is given in the SAR distribution plots (See ANNEX C).

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**Table 14: SAR Values (GSM850, enhanced energy coupling at increased separation distances)**

| Different Test Position | Distance of EUT to Phantom | Channel | Measurement Result (W/kg) | 50% of initial position SAR (W/kg) | 125% of initial position SAR (W/kg) |
|-------------------------|----------------------------|---------|---------------------------|------------------------------------|-------------------------------------|
| Test Position 5         | initial position           | High    | 0.937                     | 0.469                              | 1.171                               |
|                         | 5mm                        |         | 0.279                     |                                    |                                     |

- Note: 1. The probe tip location is fixed at the distance of 2mm from the phantom surface.
2. When the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.
3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**7.3.2. GSM 1900(GPRS/EGPRS)**

**Table 15: SAR Values [GSM1900 (GPRS/EGPRS)]**

| Limit of SAR (W/kg)                           |                     |         | 10 g Average              | 1g Average      | Power Drift(dB) | Graph Results |
|---|---------------------|---------|---------------------------|-----------------|-----------------|---------------|
|   |                     |         | 2.0                       | 1.6             | ± 0.21          |               |
| Test Case Of Body                             |                     |         | Measurement Result (W/kg) |                 | Power Drift(dB) |               |
| Different Test Position                       | Different Timeslots | Channel | 10 g Average              | 1 g Average     |                 |               |
| <b>IBM T61</b>                                |                     |         |                           |                 |                 |               |
| Test Position 1                               | 2 timeslots         | High    | 0.317(max.cube)           | 0.529(max.cube) | -0.008          | Figure 17     |
|   |                     | Middle  | 0.308(max.cube)           | 0.540(max.cube) | -0.128          | Figure 18     |
|   |                     | Low     | 0.312                     | 0.543           | -0.005          | Figure 19     |
| Test Position 2                               | 2 timeslots         | Middle  | 0.299(max.cube)           | 0.531(max.cube) | -0.068          | Figure 20     |
| Test Position 3                               | 2 timeslots         | Middle  | 0.151                     | 0.385           | -0.009          | Figure 21     |
| <b>Lenovo Y450</b>                            |                     |         |                           |                 |                 |               |
| Test Position 4                               | 2 timeslots         | Middle  | 0.239                     | 0.456           | -0.106          | Figure 22     |
| Test Position 5                               | 2 timeslots         | Middle  | 0.261                     | 0.428           | -0.038          | Figure 23     |
| <b>Worst case position of GPRS with EGPRS</b> |                     |         |                           |                 |                 |               |
| Test Position 1                               | 4 timeslots         | Low     | 0.321                     | 0.532           | -0.143          | Figure 24     |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst case.
4. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above; the value from the second assessed cube is given in the SAR distribution plots (See ANNEX C).

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**Table 16: SAR Values (GSM1900, enhanced energy coupling at increased separation distances)**

| Different Test Position | Distance of EUT to Phantom | Channel | Measurement Result (W/kg) | 50% of initial position SAR (W/kg) | 125% of initial position SAR (W/kg) |
|-------------------------|----------------------------|---------|---------------------------|------------------------------------|-------------------------------------|
| Test Position 1         | initial position           | Low     | 0.689                     | 0.344                              | 0.861                               |
|                         | 5mm                        |         | 0.404                     |                                    |                                     |
|                         | 10mm                       |         | 0.216                     |                                    |                                     |

- Note: 1. The probe tip location is fixed at the distance of 2mm from the phantom surface.  
 2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.  
 3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**7.3.3. WCDMA Band II (WCDMA/HSDPA/HSUPA)**

**Table 17: SAR Values [WCDMA Band II (WCDMA/HSDPA/HSUPA)]**

| Limit of SAR (W/kg)                          |         | 10 g Average              | 1g Average      | Power Drift(dB) | Graph Results |
|--|---------|---------------------------|-----------------|-----------------|---------------|
|  |         | 2.0                       | 1.6             | ± 0.21          |               |
| Test Case Of Body                            |         | Measurement Result (W/kg) |                 | Power Drift(dB) |               |
| Different Test Position                      | Channel | 10 g Average              | 1 g Average     | Power Drift(dB) |               |
| <b>IBM T61</b>                               |         |                           |                 |                 |               |
| Test Position 1                              | High    | 0.435                     | 0.763           | -0.010          | Figure 25     |
|  | Middle  | 0.489                     | 0.868           | -0.085          | Figure 26     |
|  | Low     | 0.593                     | 1.040           | -0.043          | Figure 27     |
| Test Position 2                              | High    | 0.380(max.cube)           | 0.677(max.cube) | -0.076          | Figure 28     |
|  | Middle  | 0.541                     | 0.977           | -0.038          | Figure 29     |
|  | Low     | 0.629                     | 1.150           | -0.174          | Figure 30     |
| Test Position 3                              | Middle  | 0.234                     | 0.533           | -0.151          | Figure 31     |
| <b>Lenovo Y450</b>                           |         |                           |                 |                 |               |
| Test Position 4                              | Middle  | 0.407                     | 0.773           | 0.095           | Figure 32     |
| Test Position 5                              | Middle  | 0.440                     | 0.749           | 0.090           | Figure 33     |
| <b>Worst case position of RMC with HSDPA</b> |         |                           |                 |                 |               |
| Test Position 2                              | Low     | 0.566                     | 1.020           | 0.003           | Figure 34     |
| <b>Worst case position of RMC with HSUPA</b> |         |                           |                 |                 |               |
| Test Position 2                              | Low     | 0.381                     | 0.678           | -0.012          | Figure 35     |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst case.
4. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above; the value from the second assessed cube is given in the SAR distribution plots (See ANNEX C).

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**Table 18: SAR Values (WCDMA Band II, enhanced energy coupling at increased separation distances)**

| Different Test Position | Distance of EUT to Phantom | Channel | Measurement Result (W/kg) | 50% of initial position SAR (W/kg) | 125% of initial position SAR (W/kg) |
|-------------------------|----------------------------|---------|---------------------------|------------------------------------|-------------------------------------|
| Test Position 2         | initial position           | Low     | 1.150                     | 0.575                              | 1.438                               |
|                         | 5mm                        |         | 0.670                     |                                    |                                     |
|                         | 10mm                       |         | 0.290                     |                                    |                                     |

- Note: 1. The probe tip location is fixed at the distance of 2mm from the phantom surface.  
 2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.  
 3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**7.3.4. WCDMA Band IV (WCDMA/HSDPA/HSUPA)**

**Table 19: SAR Values [WCDMA Band IV (WCDMA/HSDPA/HSUPA)]**

| Limit of SAR (W/kg)                          |         | 10 g Average              | 1g Average  | Power Drift(dB) | Graph Results |
|--|---------|---------------------------|-------------|-----------------|---------------|
|  |         | 2.0                       | 1.6         | ± 0.21          |               |
| Test Case Of Body                            |         | Measurement Result (W/kg) |             | Power Drift(dB) |               |
| Different Test Position                      | Channel | 10 g Average              | 1 g Average | Power Drift(dB) |               |
| <b>IBM T61</b>                               |         |                           |             |                 |               |
| Test Position 1                              | Middle  | 0.399                     | 0.672       | -0.029          | Figure 36     |
| Test Position 2                              | High    | 0.638                     | 1.170       | -0.015          | Figure 37     |
|  | Middle  | 0.524                     | 0.965       | 0.110           | Figure 38     |
|  | Low     | 0.592                     | 1.090       | -0.081          | Figure 39     |
| Test Position 3                              | Middle  | 0.286                     | 0.652       | -0.063          | Figure 40     |
| <b>Lenovo Y450</b>                           |         |                           |             |                 |               |
| Test Position 4                              | Middle  | 0.341                     | 0.633       | -0.061          | Figure 41     |
| Test Position 5                              | Middle  | 0.281                     | 0.482       | -0.099          | Figure 42     |
| <b>Worst case position of RMC with HSDPA</b> |         |                           |             |                 |               |
| Test Position 2                              | High    | 0.636                     | 1.170       | 0.132           | Figure 43     |
| <b>Worst case position of RMC with HSUPA</b> |         |                           |             |                 |               |
| Test Position 2                              | High    | 0.515                     | 0.948       | 0.029           | Figure 44     |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst case.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**Table 20: SAR Values (WCDMA Band IV, enhanced energy coupling at increased separation distances)**

| <b>Different Test Position</b> | <b>Distance of EUT to Phantom</b> | <b>Channel</b> | <b>Measurement Result (W/kg)</b> | <b>50% of initial position SAR (W/kg)</b> | <b>125% of initial position SAR (W/kg)</b> |
|--------------------------------|-----------------------------------|----------------|----------------------------------|---|--|
| Test Position 2                | initial position                  | High           | 1.357                            | 0.679                                     | 1.696                                      |
|                                | 5mm                               |                | 0.586                            |   |  |

- Note: 1. The probe tip location is fixed at the distance of 2mm from the phantom surface.  
2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.  
3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

### 7.3.5. WCDMA Band V (WCDMA/HSDPA/HSUPA)

**Table 21: SAR Values [WCDMA Band V (WCDMA/HSDPA/HSUPA)]**

| Limit of SAR (W/kg)                          |         | 10 g Average              | 1g Average      | Power Drift(dB) | Graph Results |
|--|---------|---------------------------|-----------------|-----------------|---------------|
|  |         | 2.0                       | 1.6             | ± 0.21          |               |
| Test Case Of Body                            |         | Measurement Result (W/kg) |                 | Power Drift(dB) |               |
| Different Test Position                      | Channel | 10 g Average              | 1 g Average     | Power Drift(dB) |               |
| <b>IBM T61</b>                               |         |                           |                 |                 |               |
| Test Position 1                              | Middle  | 0.287(max)                | 0.508(max)      | -0.089          | Figure 45     |
| Test Position 2                              | Middle  | 0.345                     | 0.568           | 0.000           | Figure 46     |
| Test Position 3                              | Middle  | 0.114                     | 0.368           | -0.051          | Figure 47     |
| <b>Lenovo Y450</b>                           |         |                           |                 |                 |               |
| Test Position 4                              | Middle  | 0.282                     | 0.469           | 0.070           | Figure 48     |
| Test Position 5                              | High    | 0.278                     | 0.594           | -0.135          | Figure 49     |
|  | Middle  | 0.289                     | 0.596           | -0.095          | Figure 50     |
|  | Low     | 0.270(max.cube)           | 0.538(max.cube) | -0.114          | Figure 51     |
| <b>Worst case position of RMC with HSDPA</b> |         |                           |                 |                 |               |
| Test Position 5                              | Middle  | 0.284                     | 0.581           | -0.151          | Figure 52     |
| <b>Worst case position of RMC with HSUPA</b> |         |                           |                 |                 |               |
| Test Position 5                              | Middle  | 0.207                     | 0.422           | 0.043           | Figure 53     |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst case.
4. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above; the value from the second assessed cube is given in the SAR distribution plots (See ANNEX C).

**Table 22: SAR Values (WCDMA Band V, enhanced energy coupling at increased separation distances)**

| Different Test Position | Distance of EUT to Phantom | Channel | Measurement Result (W/kg) | 50% of initial position SAR (W/kg) | 125% of initial position SAR (W/kg) |
|-------------------------|----------------------------|---------|---------------------------|------------------------------------|-------------------------------------|
| Test Position 5         | initial position           | Middle  | 0.596                     | 0.298                              | 0.745                               |
|                         | 5mm                        |         | 0.179                     |                                    |                                     |

- Note: 1. The probe tip location is fixed at the distance of 2mm from the phantom surface.  
 2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.  
 3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

**7.4. Conclusion**

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this report. Maximum localized SAR<sub>1g</sub> is SAR<sub>1g</sub> of GSM 850 is **0.909** W/kg, maximum localized SAR<sub>1g</sub> of GSM 1900 is **0.543** W/kg, maximum localized SAR<sub>1g</sub> of WCDMA Band II is **1.150** W/kg, maximum localized SAR<sub>1g</sub> of WCDMA Band IV is **1.170** W/kg and maximum localized SAR<sub>1g</sub> of WCDMA Band V is **0.596** W/kg that is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0605

Page 44 of 145

**8. Measurement Uncertainty**

| No.                 | source  | Type | Uncertainty Value (%) | Probability Distribution | k          | c <sub>i</sub> | Standard uncertainty u <sub>i</sub> (%) | Degree of freedom V <sub>eff</sub> or v <sub>i</sub> |
|---------------------|---|------|-----------------------|--------------------------|------------|----------------|---|--|
| 1                   | System repetivity   | A    | 0.5                   | N                        | 1          | 1              | 0.5                                     | 9  |
| Measurement system  |   |      |                       |                          |            |                |   |  |
| 2                   | probe calibration   | B    | 5.9                   | N                        | 1          | 1              | 5.9                                     | ∞  |
| 3                   | axial isotropy of the probe   | B    | 4.7                   | R                        | $\sqrt{3}$ | $\sqrt{0.5}$   | 1.9                                     | ∞  |
| 4                   | Hemispherical isotropy of the probe   | B    | 9.4                   | R                        | $\sqrt{3}$ | $\sqrt{0.5}$   | 3.9                                     | ∞  |
| 6                   | boundary effect   | B    | 1.9                   | R                        | $\sqrt{3}$ | 1              | 1.1                                     | ∞  |
| 7                   | probe linearity   | B    | 4.7                   | R                        | $\sqrt{3}$ | 1              | 2.7                                     | ∞  |
| 8                   | System detection limits   | B    | 1.0                   | R                        | $\sqrt{3}$ | 1              | 0.6                                     | ∞  |
| 9                   | readout Electronics   | B    | 1.0                   | N                        | 1          | 1              | 1.0                                     | ∞  |
| 10                  | response time   | B    | 0                     | R                        | $\sqrt{3}$ | 1              | 0                                       | ∞  |
| 11                  | integration time  | B    | 4.32                  | R                        | $\sqrt{3}$ | 1              | 2.5                                     | ∞  |
| 12                  | noise   | B    | 0                     | R                        | $\sqrt{3}$ | 1              | 0                                       | ∞  |
| 13                  | RF Ambient Conditions   | B    | 3                     | R                        | $\sqrt{3}$ | 1              | 1.73                                    | ∞  |
| 14                  | Probe Positioner Mechanical Tolerance   | B    | 0.4                   | R                        | $\sqrt{3}$ | 1              | 0.2                                     | ∞  |
| 15                  | Probe Positioning with respect to Phantom Shell                                 | B    | 2.9                   | R                        | $\sqrt{3}$ | 1              | 1.7                                     | ∞  |
| 16                  | Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation | B    | 3.9                   | R                        | $\sqrt{3}$ | 1              | 2.3                                     | ∞  |
| Test sample Related |   |      |                       |                          |            |                |   |  |
| 17                  | -Test Sample Positioning  | A    | 2.9                   | N                        | 1          | 1              | 2.9                                     | 5  |
| 18                  | -Device Holder Uncertainty  | A    | 4.1                   | N                        | 1          | 1              | 4.1                                     | 5  |
| 19                  | -Output Power Variation - SAR drift measurement                                 | B    | 5.0                   | R                        | $\sqrt{3}$ | 1              | 2.9                                     | ∞  |
| Physical parameter  |   |      |                       |                          |            |                |   |  |

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0605

Page 45 of 145

|  |  |  |     |   |            |      |     |          |
|--|--|--|-----|---|------------|------|-----|----------|
| 20   | -phantom                                       | B  | 4.0 | R | $\sqrt{3}$ | 1    | 2.3 | $\infty$ |
| 21   | -liquid conductivity (deviation from target)   | B  | 5.0 | R | $\sqrt{3}$ | 0.64 | 1.8 | $\infty$ |
| 22   | -liquid conductivity (measurement uncertainty) | B  | 5.0 | N | 1          | 0.64 | 3.2 | $\infty$ |
| 23   | -liquid permittivity (deviation from target)   | B  | 5.0 | R | $\sqrt{3}$ | 0.6  | 1.7 | $\infty$ |
| 24   | -liquid permittivity (measurement uncertainty) | B  | 5.0 | N | 1          | 0.6  | 3.0 | $\infty$ |
| Combined standard uncertainty                      |  | $u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$ |     |   |            | 12.0 |     |          |
| Expanded uncertainty (confidence interval of 95 %) |  | $u_e = 2u_c$                               |     | N | k=2        | 24.0 |     |          |

## 9. Main Test Instruments

**Table 23: List of Main Instruments**

| No. | Name                   | Type           | Serial Number | Calibration Date         | Valid Period |
|-----|------------------------|----------------|---------------|--------------------------|--------------|
| 01  | Network analyzer       | Agilent 8753E  | US37390326    | September 13, 2009       | One year     |
| 02  | Dielectric Probe Kit   | Agilent 85070E | US44020115    | No Calibration Requested |              |
| 03  | Power meter            | Agilent E4417A | GB41291714    | March 13, 2010           | One year     |
| 04  | Power sensor           | Agilent 8481H  | MY41091316    | March 26, 2010           | One year     |
| 05  | Signal Generator       | HP 8341B       | 2730A00804    | September 13, 2009       | One year     |
| 06  | Amplifier              | IXA-020        | 0401          | No Calibration Requested |              |
| 07  | Validation Kit 835MHz  | D835V2         | 4d082         | July 13, 2009            | One year     |
| 08  | Validation Kit 1800MHz | D1800V2        | 2d052         | June 26, 2009            | One year     |
| 09  | Validation Kit 1900MHz | D1900V2        | 5d018         | June 26, 2009            | One year     |
| 10  | BTS                    | E5515C         | MY48360988    | December 4, 2009         | One year     |
| 11  | E-field Probe          | EX3DV4         | 3677          | September 23, 2009       | One year     |
| 12  | DAE                    | DAE4           | 871           | November 11, 2009        | One year     |

\*\*\*END OF REPORT BODY\*\*\*


## ANNEX A: Test Layout




Picture 2: Specific Absorption Rate Test Layout



Picture 3: Liquid depth in the Flat Phantom (835 MHz)  
(15.2cm deep)

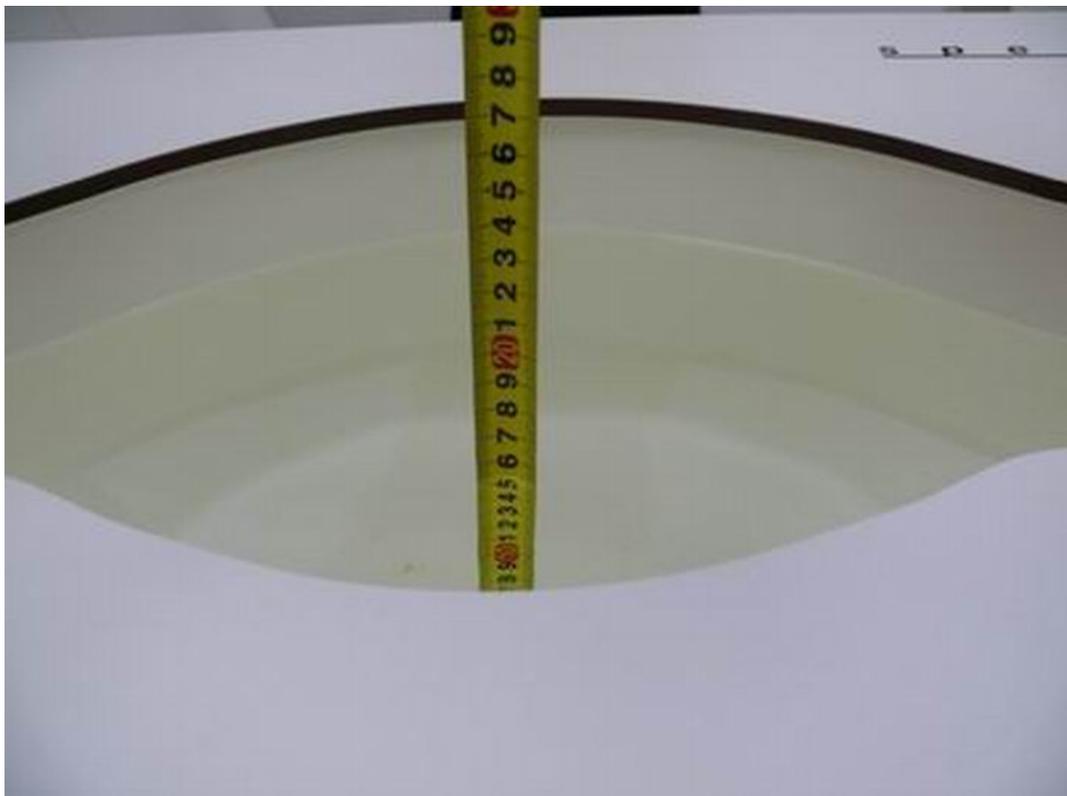

Picture 4: Liquid depth in the Flat Phantom (1750 MHz)  
(15.3cm deep)

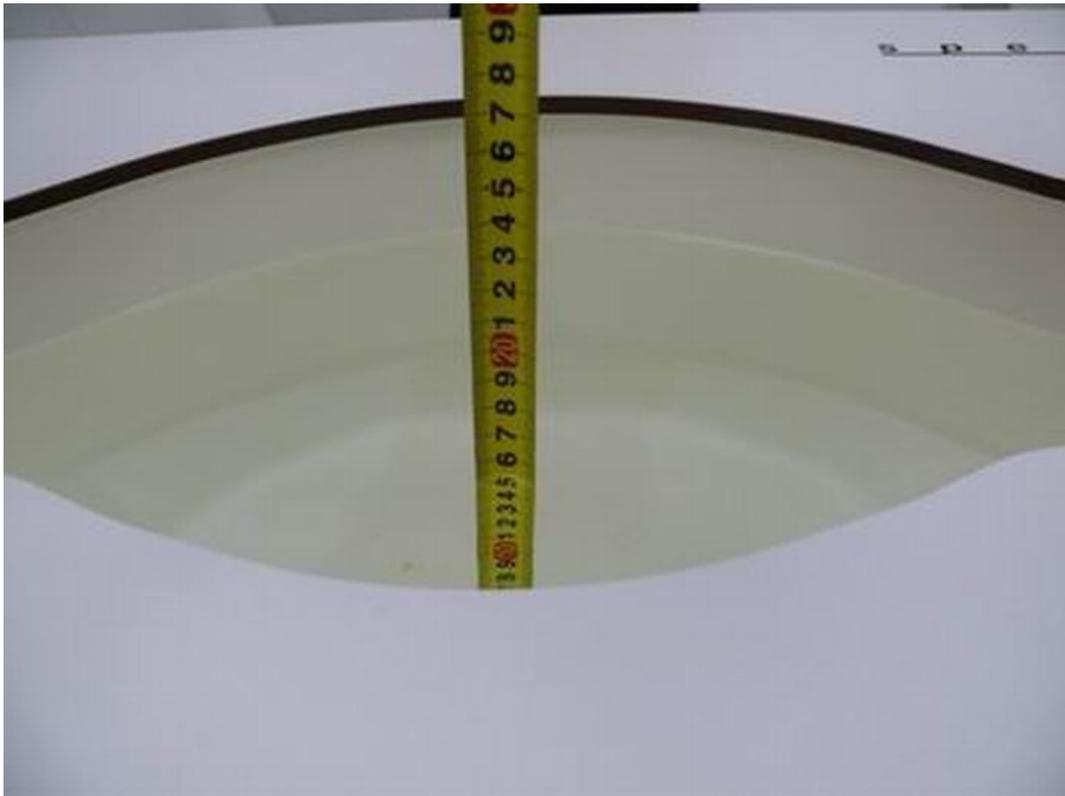

**Picture 5: Liquid depth in the Flat Phantom (1900 MHz)  
(15.3cm deep)**

## ANNEX B: System Check Results

### System Performance Check at 835 MHz

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d082

Date/Time: 4/23/2010 5:54 PM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 54.00$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**d=15mm, Pin=250mW/Area Scan (101x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.93 mW/g

**d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.7 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 3.59 W/kg

**SAR(1 g) = 2.38 mW/g; SAR(10 g) = 1.57 mW/g**

Maximum value of SAR (measured) = 2.92 mW/g

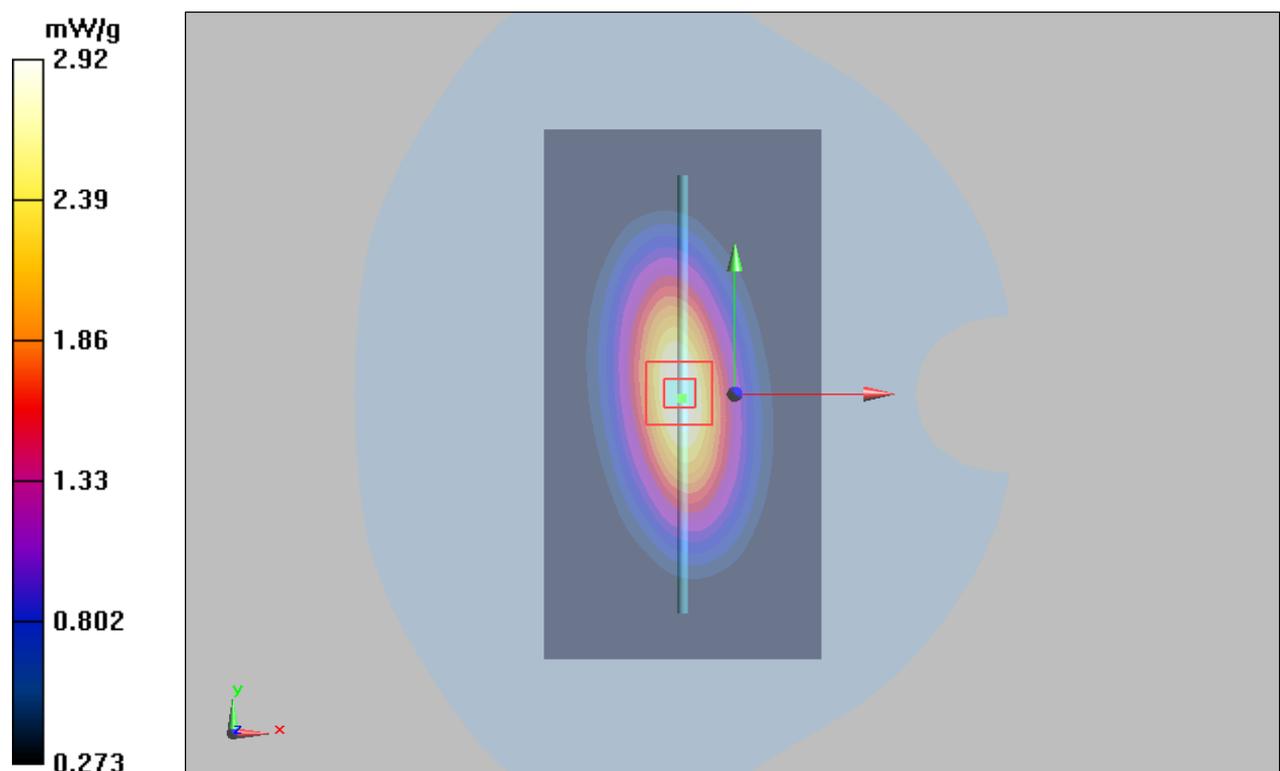


Figure 6 System Performance Check 835MHz 250mW

### System Performance Check at 1800 MHz

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN: 2d052

Date/Time: 4/23/2010 3:41:55 PM

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 52.51$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.7, 7.7, 7.7); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**d=10mm, Pin=250mW/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.2 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 83.2 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 18.5 W/kg

**SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.25 mW/g**

Maximum value of SAR (measured) = 11.4 mW/g

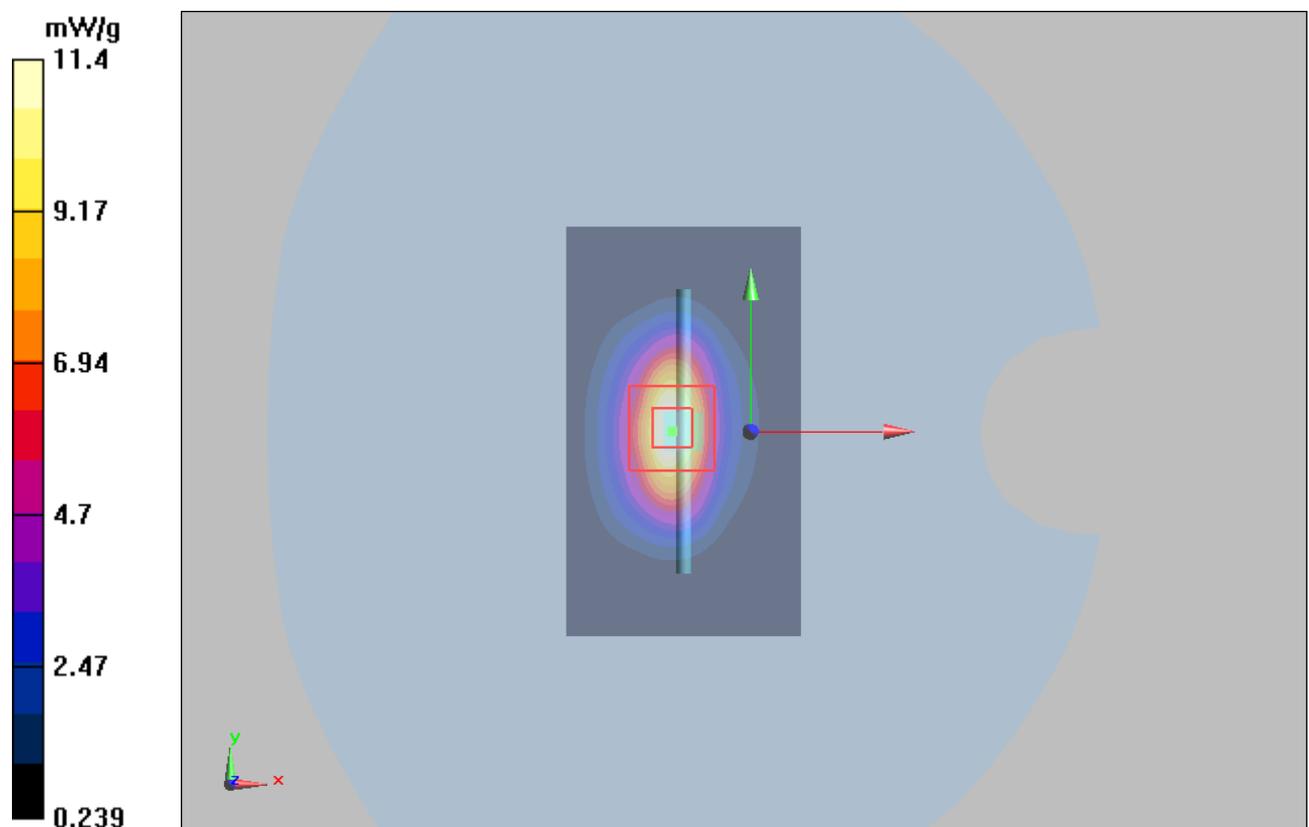


Figure 7 System Performance Check 1800MHz 250mW

### System Performance Check at 1900 MHz

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d018

Date/Time: 4/22/2010 1:14:18 PM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 52.58$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**d=10mm, Pin=250mW/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.9 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.0 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 18.9 W/kg

**SAR(1 g) = 10.01 mW/g; SAR(10 g) = 5.12 mW/g**

Maximum value of SAR (measured) = 11.3 mW/g

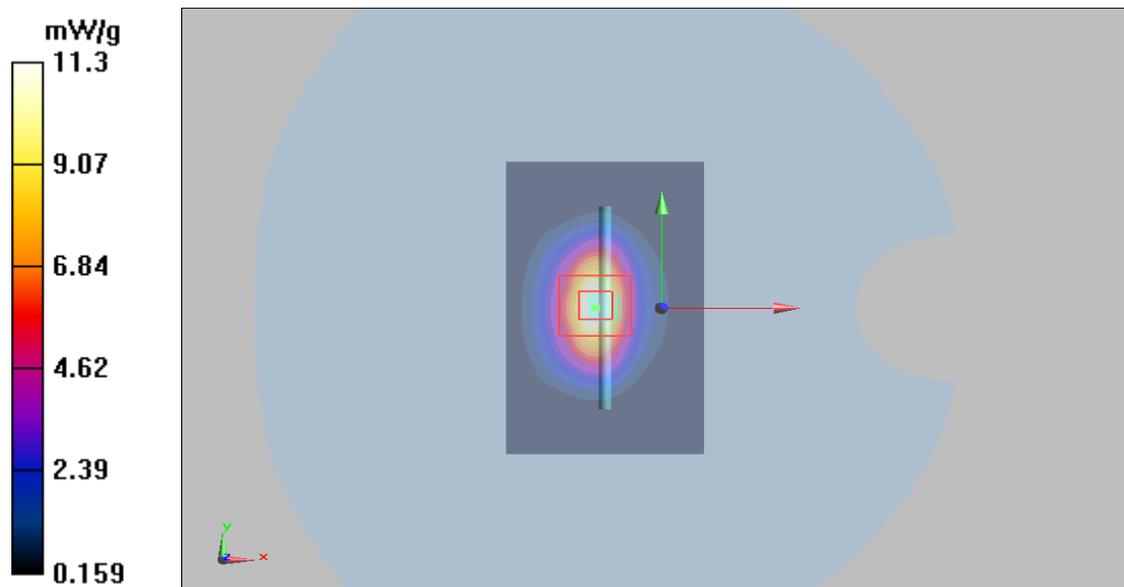


Figure 8 System Performance Check 1900MHz 250mW

## ANNEX C: Graph Results

### GSM 850 GPRS (1 timeslot in uplink) with IBM T61 Test Position 1 Middle Frequency

Date/Time: 4/23/2010 11:48:14 PM

Communication System: GSM850 + GPRS(1Up); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Middle/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.773 mW/g

**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.7 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 1.41 W/kg

**SAR(1 g) = 0.644 mW/g; SAR(10 g) = 0.371 mW/g**

Maximum value of SAR (measured) = 0.702 mW/g

**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.7 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.564 mW/g; SAR(10 g) = 0.349 mW/g**

Maximum value of SAR (measured) = 0.683 mW/g

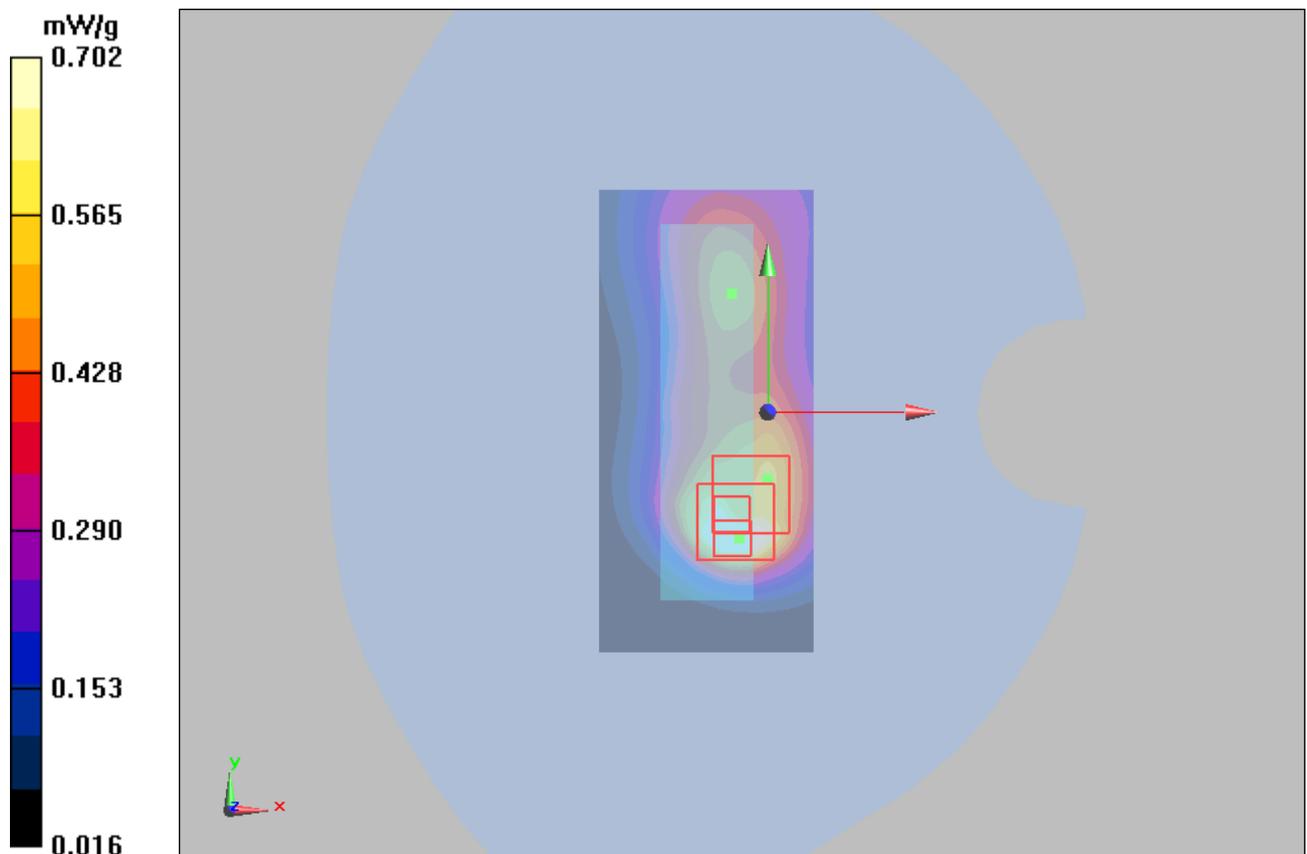


Figure 9 GSM 850 GPRS (1 timeslot in uplink) with IBM T61 Test Position 1 Channel 190

**GSM 850 GPRS (1 timeslot in uplink) with IBM T61 Test Position 2 Middle Frequency**

Date/Time: 4/23/2010 8:47:39 PM

Communication System: GSM850 + GPRS(1Up); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 2 Middle/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.834 mW/g

**Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.6 V/m; Power Drift = -0.115 dB

Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.739 mW/g; SAR(10 g) = 0.450 mW/g**

Maximum value of SAR (measured) = 0.806 mW/g

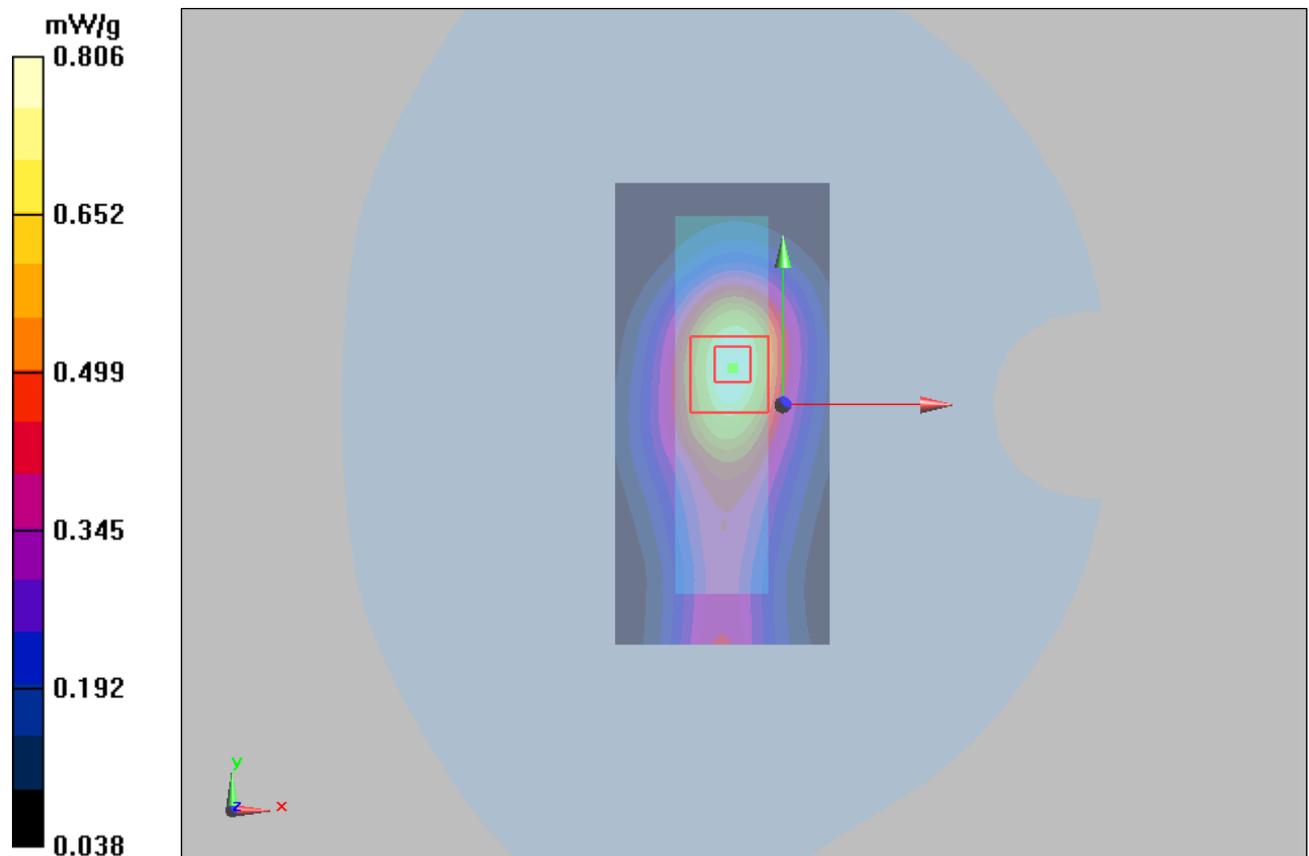


Figure 10 GSM 850 GPRS (1 timeslot in uplink) with IBM T61 Test Position 2 Channel 190

**GSM 850 GPRS (1 timeslot in uplink) with IBM T61 Test Position 3 Middle Frequency**

Date/Time: 4/23/2010 11:18:06 PM

Communication System: GSM850 + GPRS(1Up); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 3 Middle/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.391 mW/g

**Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.4 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 3.11 W/kg

**SAR(1 g) = 0.460 mW/g; SAR(10 g) = 0.136 mW/g**

Maximum value of SAR (measured) = 0.478 mW/g

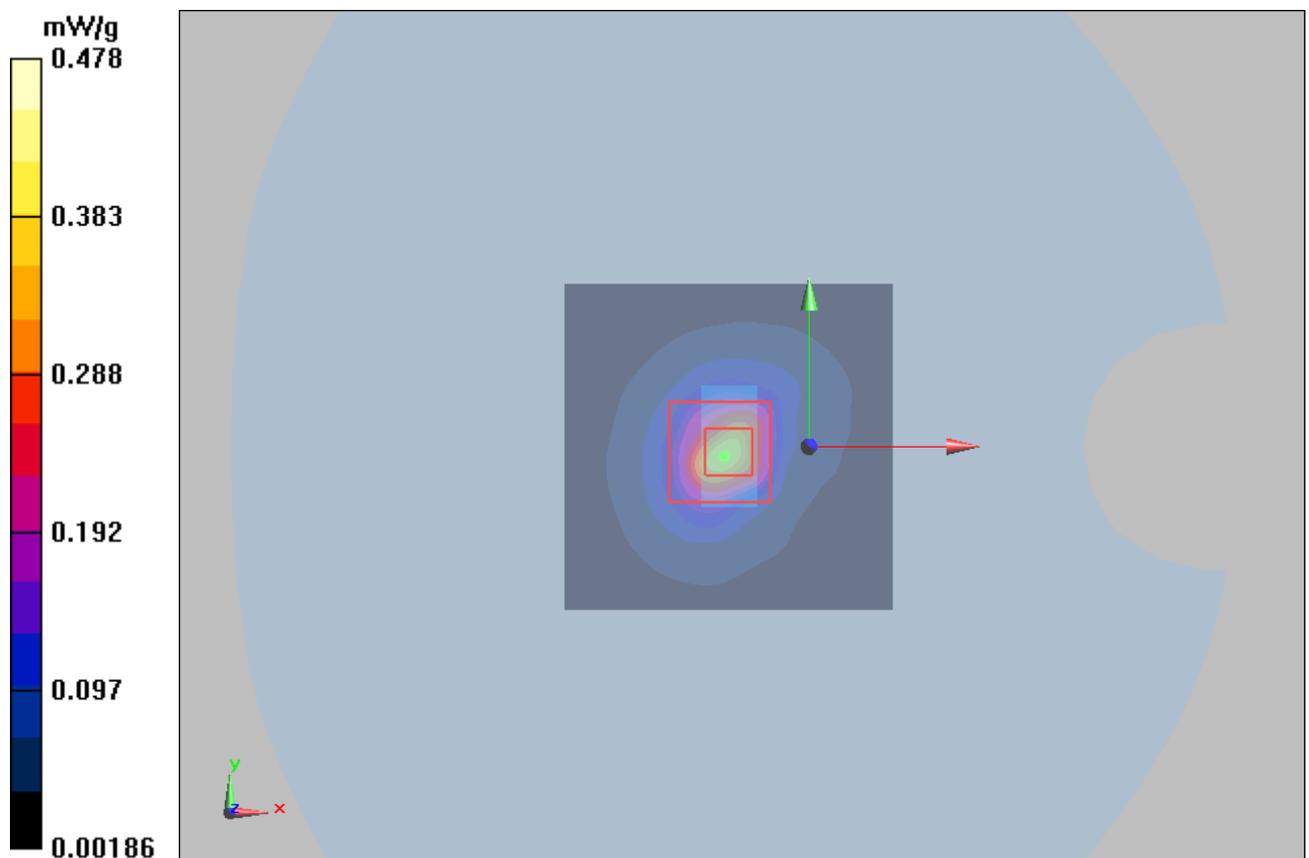


Figure 11 GSM 850 GPRS (1 timeslot in uplink) with IBM T61 Test Position 3 Channel 190

**GSM 850 GPRS (1 timeslot in uplink) with Lenovo Y450 Test Position 4 Middle Frequency**

Date/Time: 4/23/2010 9:18:46 PM

Communication System: GSM850 + GPRS(1Up); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 4 Middle/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.733 mW/g

**Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.2 V/m; Power Drift = -0.064 dB

Peak SAR (extrapolated) = 0.995 W/kg

**SAR(1 g) = 0.638 mW/g; SAR(10 g) = 0.386 mW/g**

Maximum value of SAR (measured) = 0.704 mW/g

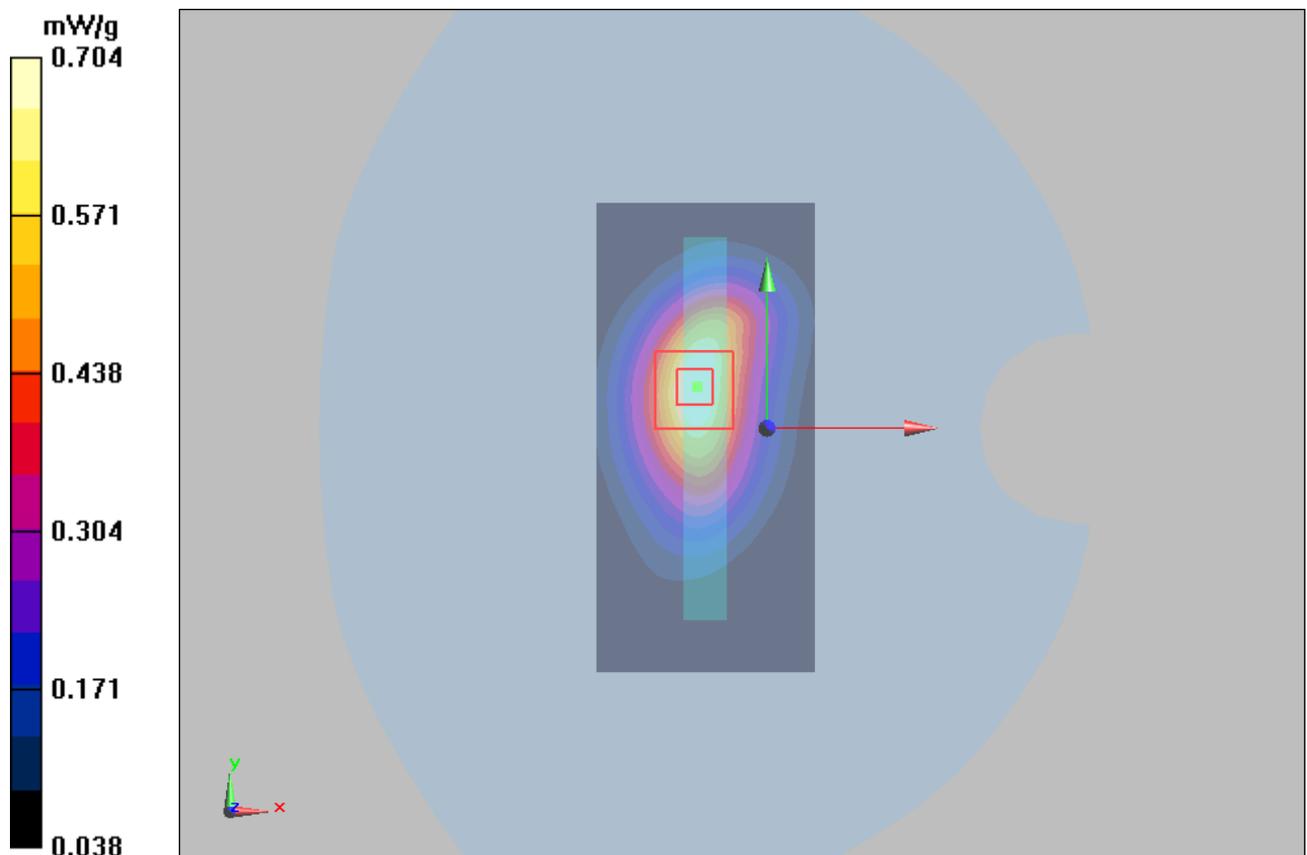


Figure 12 GSM 850 GPRS (1 timeslot in uplink) with Lenovo Y450 Test Position 4 Channel 190

### GSM 850 GPRS (1 timeslot in uplink) with Lenovo Y450 Test Position 5 High Frequency

Date/Time: 4/24/2010 12:37:07 PM

Communication System: GSM850 + GPRS(1Up); Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 53.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 5 High/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.979 mW/g


**Test Position 5 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.3 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 2.4 W/kg

**SAR(1 g) = 0.909 mW/g; SAR(10 g) = 0.429 mW/g**

Maximum value of SAR (measured) = 1.03 mW/g

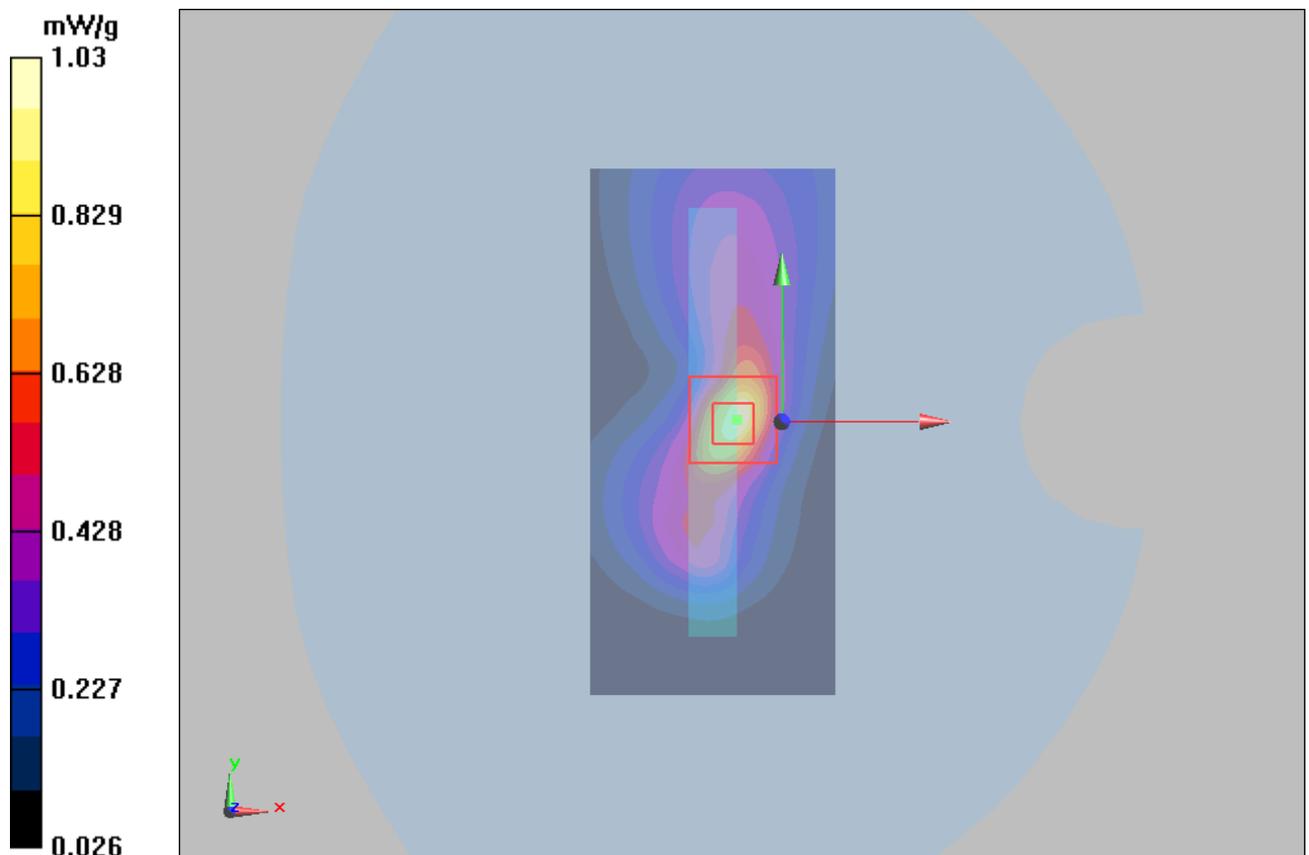

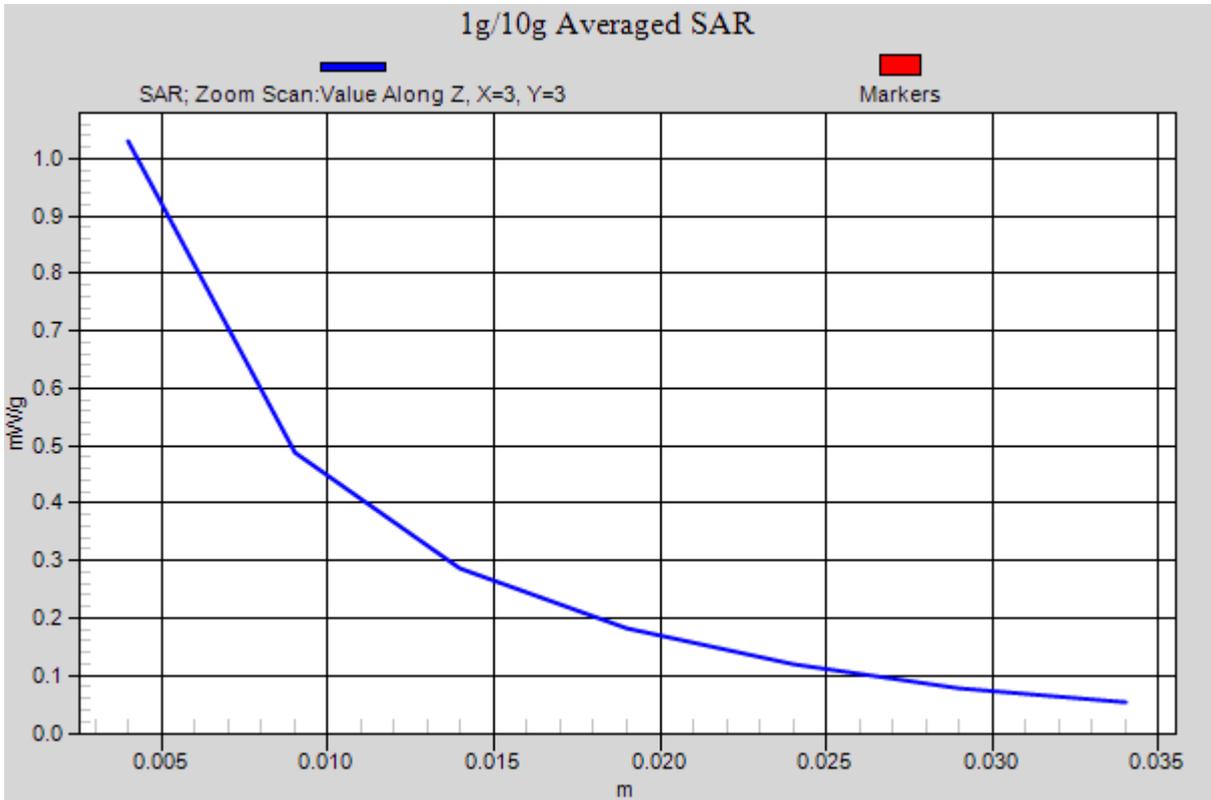


Figure 13 GSM 850 GPRS (1 timeslot in uplink) with Lenovo Y450 Test Position 5 Channel 251

### GSM 850 GPRS (1 timeslot in uplink) with Lenovo Y450 Test Position 5 Middle Frequency

Date/Time: 4/24/2010 12:09:47 PM

Communication System: GSM850 + GPRS(1Up); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 5 Middle/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.824 mW/g

**Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.4 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 1.93 W/kg

**SAR(1 g) = 0.748 mW/g; SAR(10 g) = 0.361 mW/g**

Maximum value of SAR (measured) = 0.842 mW/g

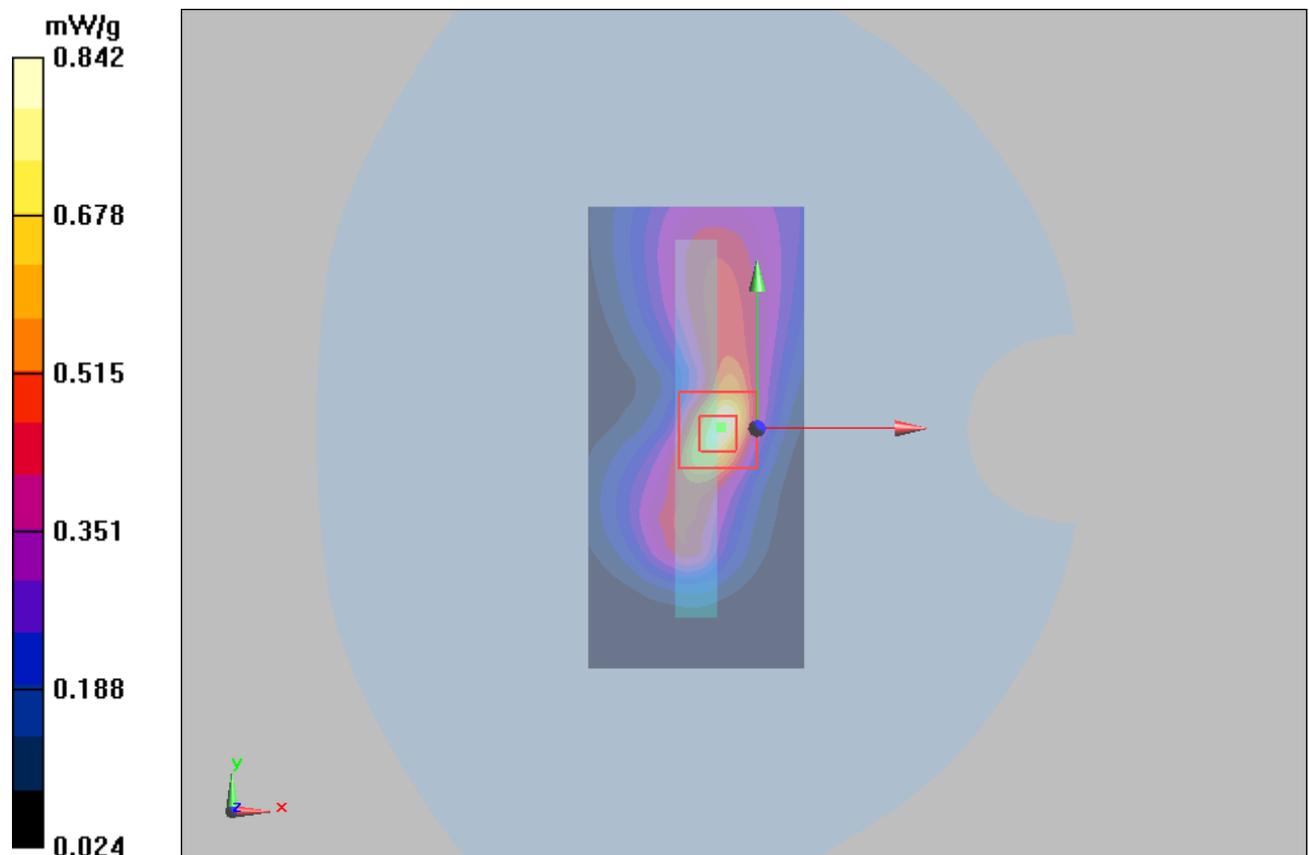


Figure 14 GSM 850 GPRS (1 timeslot in uplink) with Lenovo Y450 Test Position 5 Channel 190

**GSM 850 GPRS (1 timeslot in uplink) with Lenovo Y450 Test Position 5 Low Frequency**

Date/Time: 4/24/2010 1:19:17 PM

Communication System: GSM850 + GPRS(1Up); Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.983$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 5 Low/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.619 mW/g

**Test Position 5 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.3 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 1.37 W/kg

**SAR(1 g) = 0.580 mW/g; SAR(10 g) = 0.293 mW/g**

Maximum value of SAR (measured) = 0.647 mW/g

**Test Position 5 Low/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.3 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 0.754 W/kg

**SAR(1 g) = 0.437 mW/g; SAR(10 g) = 0.293 mW/g**

Maximum value of SAR (measured) = 0.493 mW/g

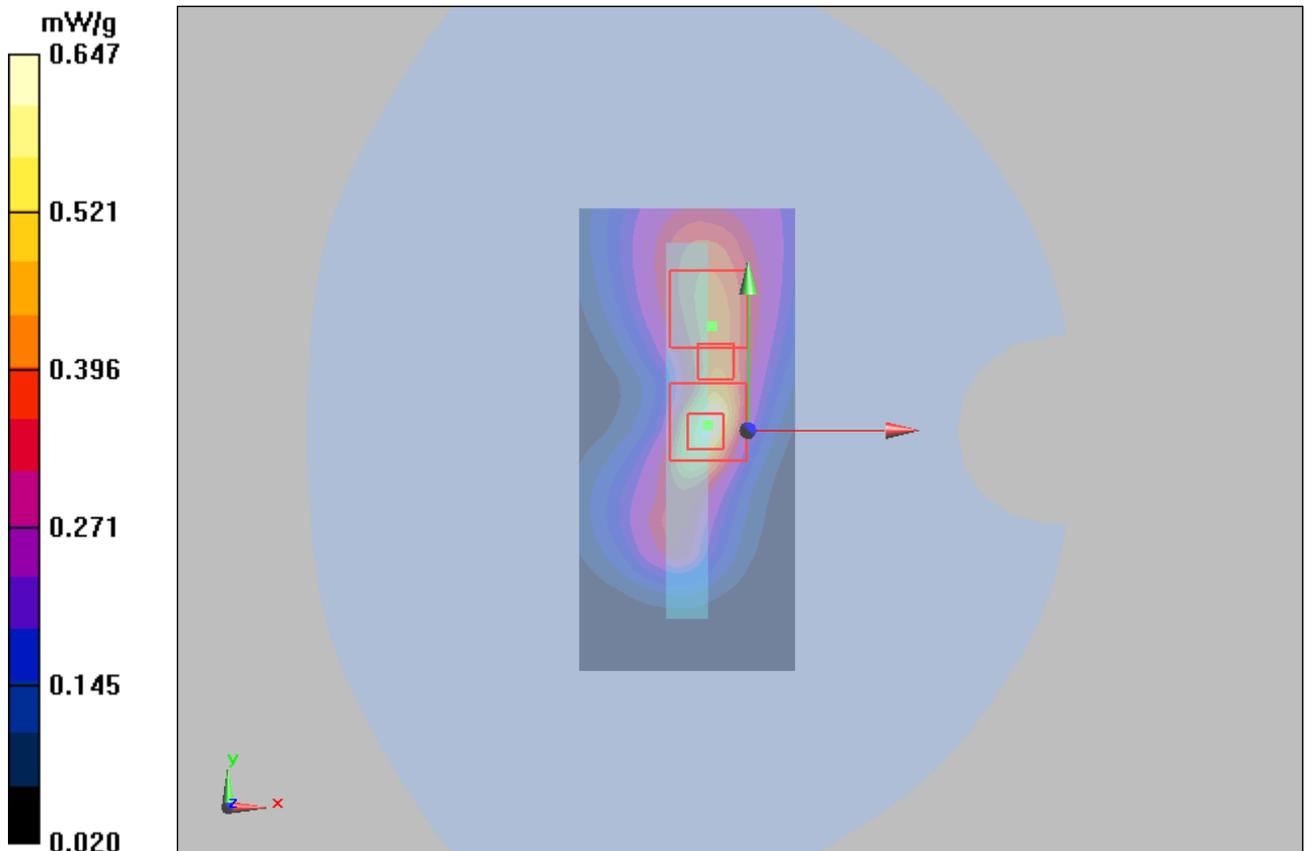


Figure 15 GSM 850 GPRS (1 timeslot in uplink) with Lenovo Y450 Test Position 5 Channel 128

### GSM 850 EGPRS (1 timeslot in uplink) with Lenovo Y450 Test Position 5 High Frequency

Date/Time: 4/24/2010 1:49:09 PM

Communication System: GSM850 + EGPRS(1Up); Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 53.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 5 High/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.972 mW/g

**Test Position 5 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.6 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 2.42 W/kg

**SAR(1 g) = 0.909 mW/g; SAR(10 g) = 0.426 mW/g**

Maximum value of SAR (measured) = 1.04 mW/g

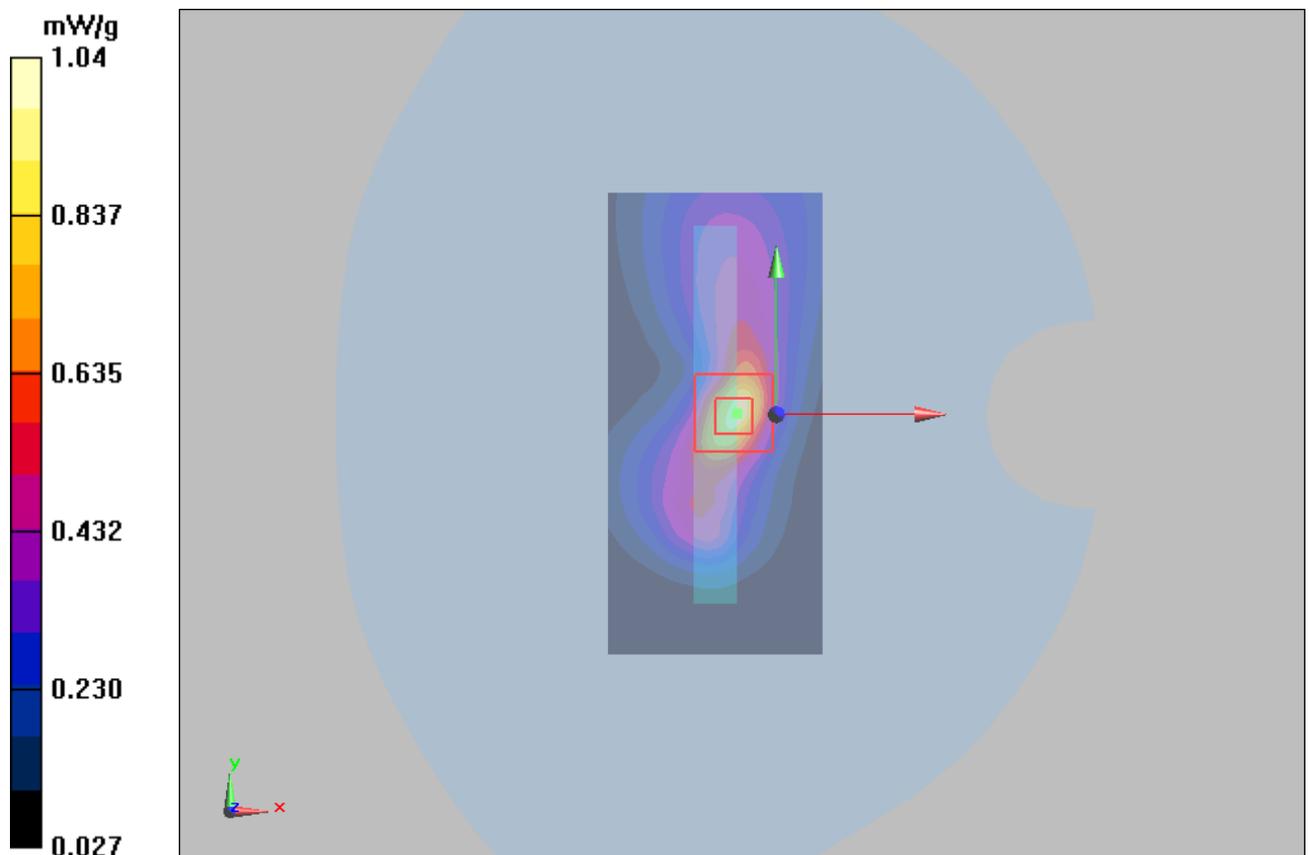


Figure 16 GSM 850 EGPRS (1 timeslot in uplink) with Lenovo Y450 Test Position 5 Channel 251

**GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 1 High Frequency**

Date/Time: 4/23/2010 10:21:14 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 High/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.570 mW/g

**Test Position 1 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.4 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 0.923 W/kg

**SAR(1 g) = 0.529 mW/g; SAR(10 g) = 0.317 mW/g**

Maximum value of SAR (measured) = 0.570 mW/g

**Test Position 1 High/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.4 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 0.897 W/kg

**SAR(1 g) = 0.513 mW/g; SAR(10 g) = 0.294 mW/g**

Maximum value of SAR (measured) = 0.561 mW/g

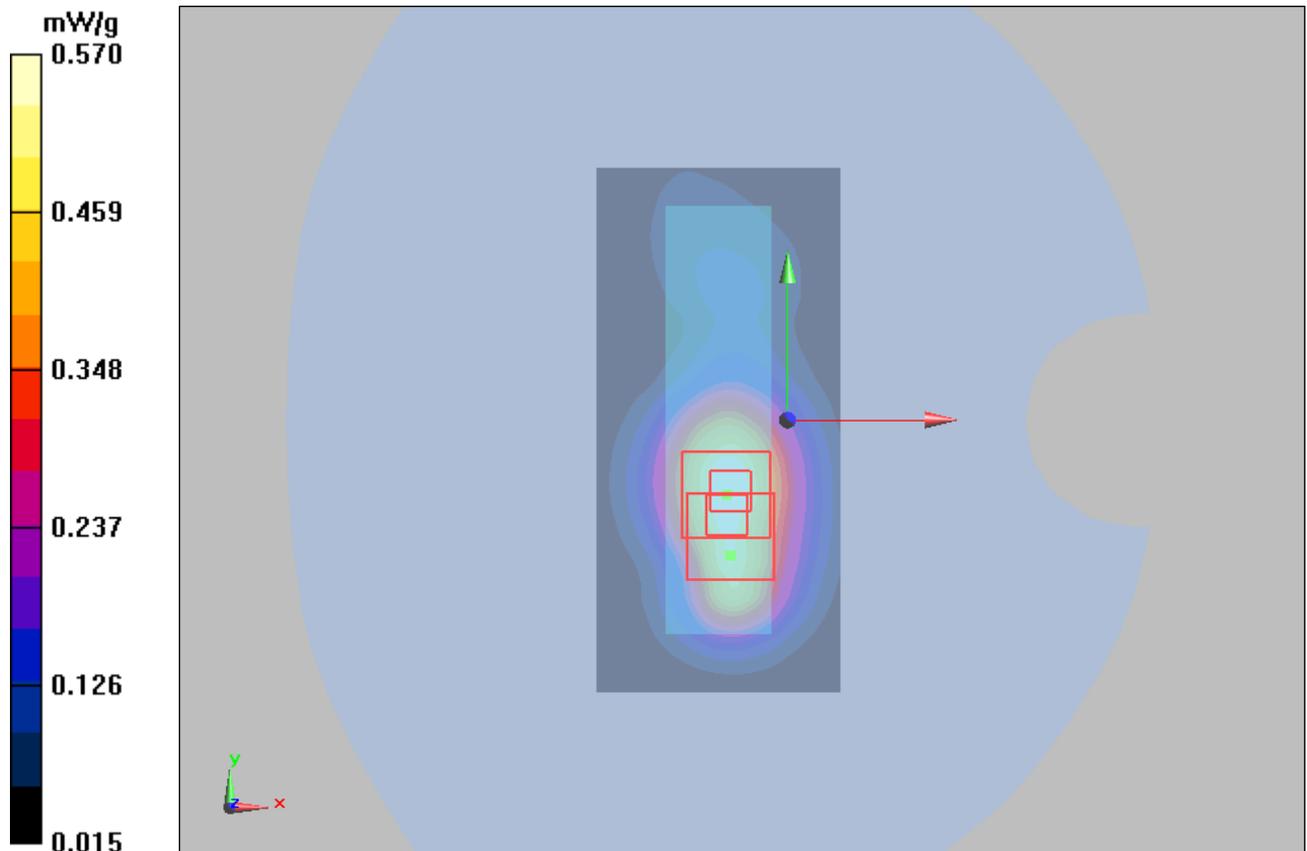


Figure 17 GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 1 Channel 810

**GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 1 Middle Frequency**

Date/Time: 4/23/2010 3:46:28 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Middle/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.615 mW/g

**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.3 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 0.999 W/kg

**SAR(1 g) = 0.540 mW/g; SAR(10 g) = 0.308 mW/g**

Maximum value of SAR (measured) = 0.588 mW/g

**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.3 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 0.911 W/kg

**SAR(1 g) = 0.531 mW/g; SAR(10 g) = 0.326 mW/g**

Maximum value of SAR (measured) = 0.579 mW/g

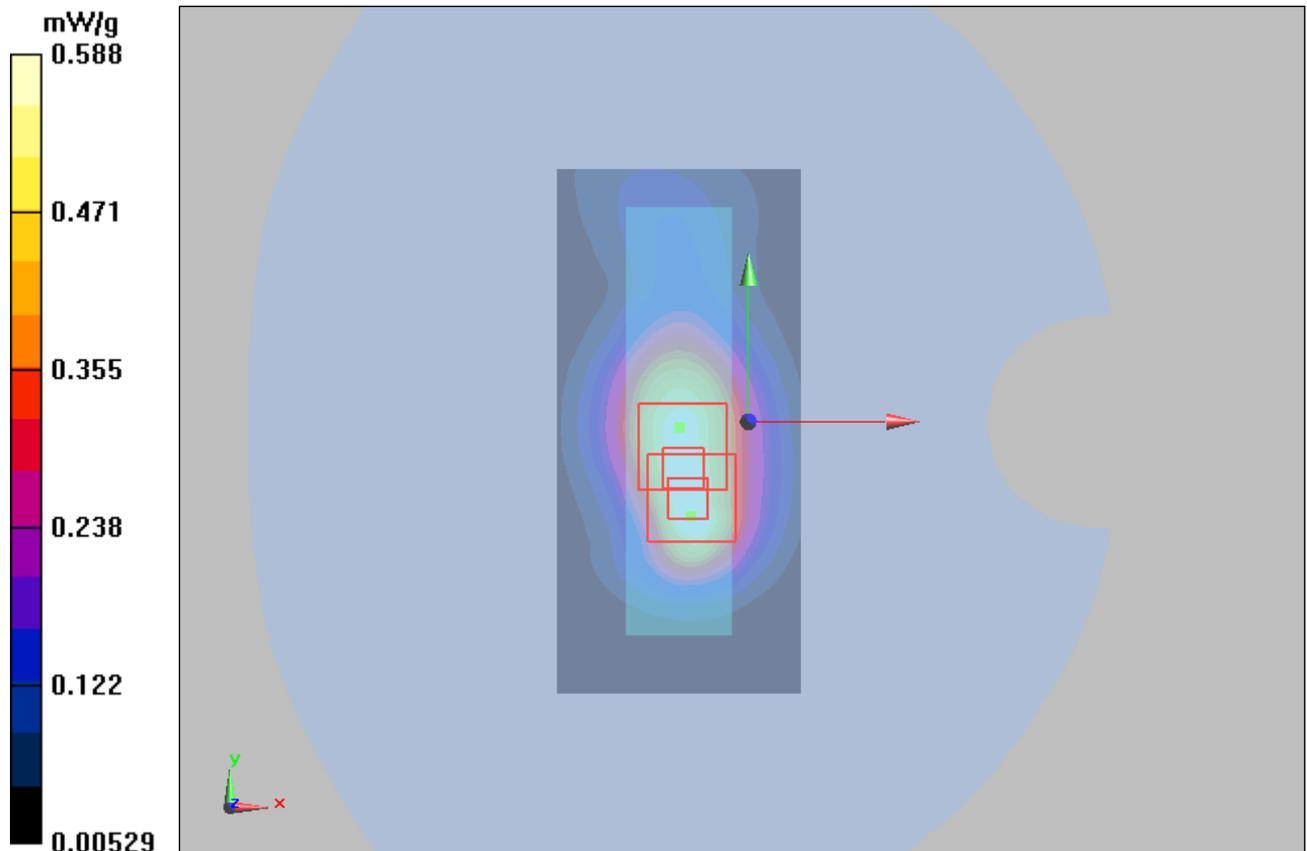


Figure 18 GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 1 Channel 661

**GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 1 Low Frequency**

Date/Time: 4/23/2010 10:48:52 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Low/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.601 mW/g


**Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.9 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.964 W/kg

**SAR(1 g) = 0.543 mW/g; SAR(10 g) = 0.312 mW/g**

Maximum value of SAR (measured) = 0.583 mW/g

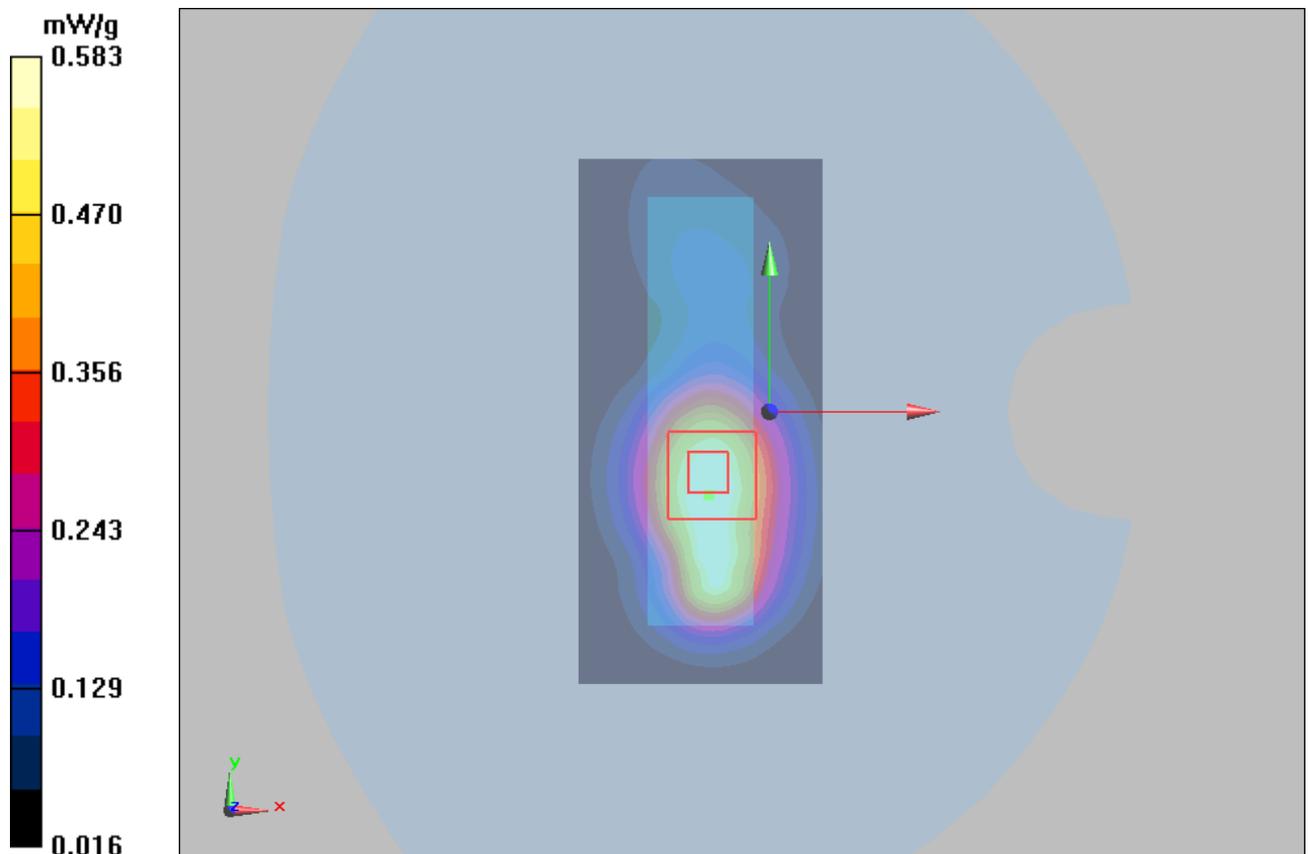

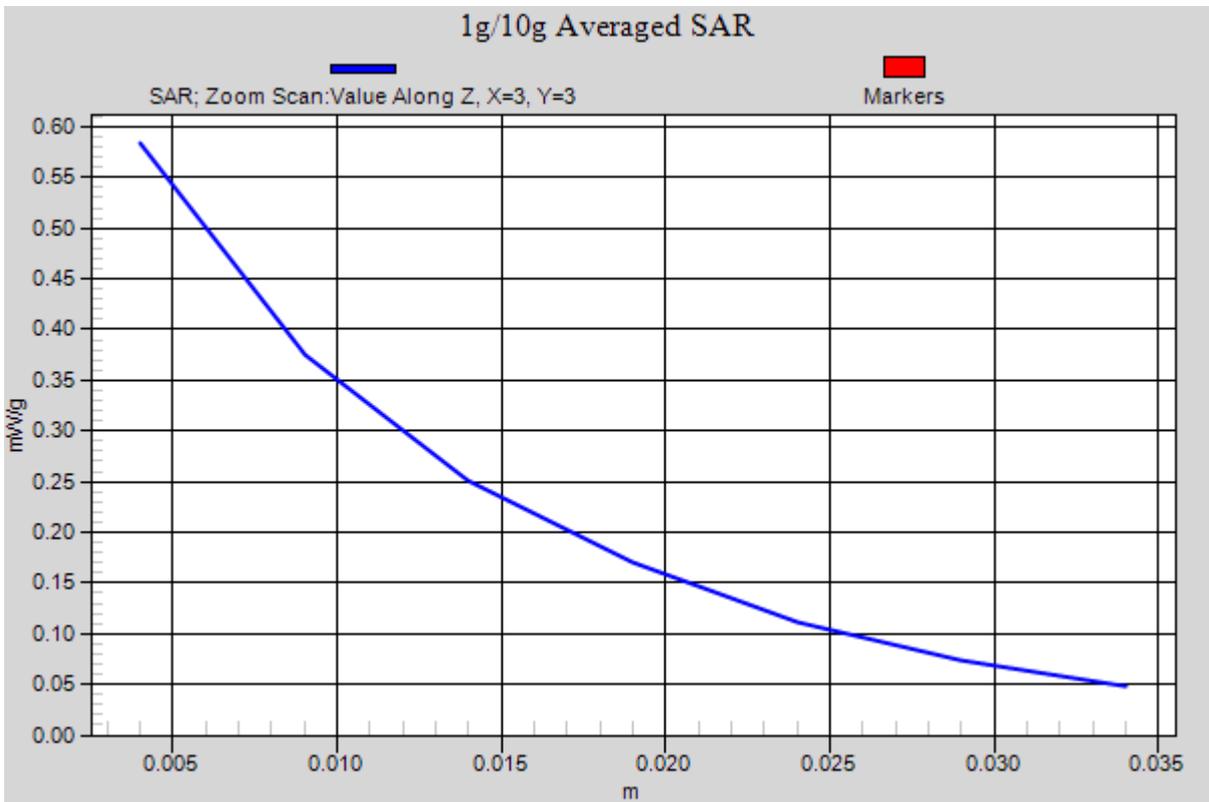


Figure 19 GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 1 Channel 512

**GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 2 Middle Frequency**

Date/Time: 4/23/2010 7:20:23 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 2 Middle/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.577 mW/g

**Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 0.984 W/kg

**SAR(1 g) = 0.531 mW/g; SAR(10 g) = 0.299 mW/g**

Maximum value of SAR (measured) = 0.568 mW/g

**Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 0.584 W/kg

**SAR(1 g) = 0.309 mW/g; SAR(10 g) = 0.156 mW/g**

Maximum value of SAR (measured) = 0.349 mW/g

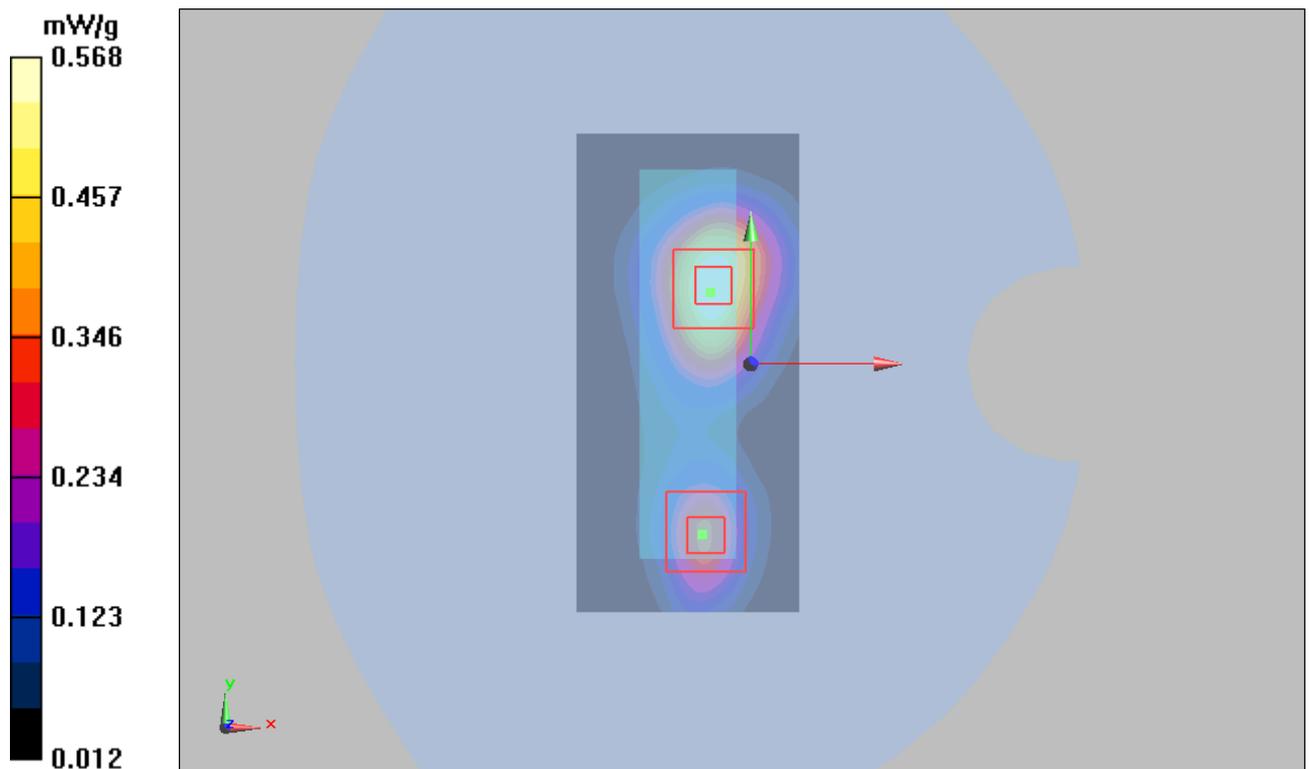


Figure 20 GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 2 Channel 661

### GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 3 Middle Frequency

Date/Time: 4/23/2010 4:13:29 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 3 Middle/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.325 mW/g

**Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.7 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 2.09 W/kg

**SAR(1 g) = 0.385 mW/g; SAR(10 g) = 0.151 mW/g**

Maximum value of SAR (measured) = 0.403 mW/g

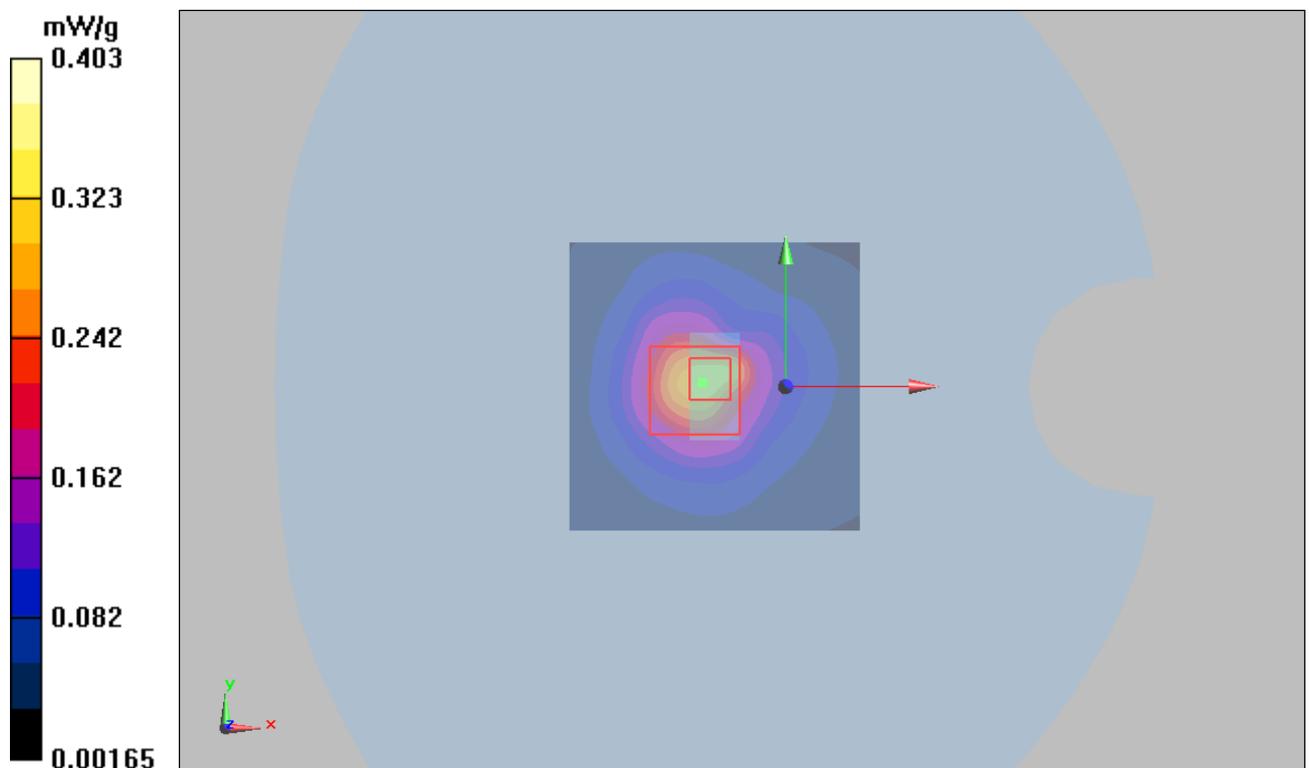


Figure 21 GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 3 Channel 661

**GSM 1900 GPRS (2 timeslots in uplink) with Lenovo Y450 Test Position 4 Middle Frequency**

Date/Time: 4/23/2010 6:32:33 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 4 Middle/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.516 mW/g

**Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = -0.106 dB

Peak SAR (extrapolated) = 0.926 W/kg

**SAR(1 g) = 0.456 mW/g; SAR(10 g) = 0.239 mW/g**

Maximum value of SAR (measured) = 0.501 mW/g

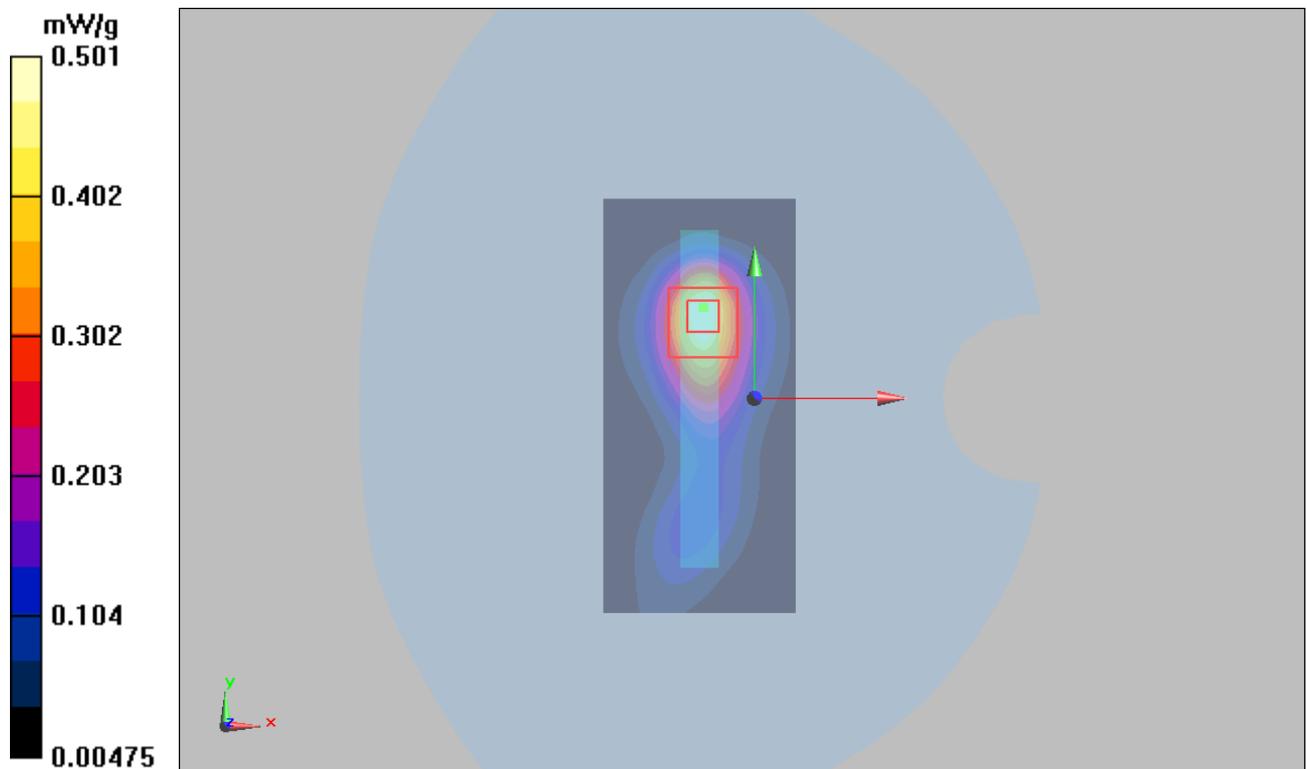


Figure 22 GSM 1900 GPRS (2 timeslots in uplink) with Lenovo Y450 Test Position 4 Channel 661

### GSM 1900 GPRS (2 timeslots in uplink) with Lenovo Y450 Test Position 5 Middle Frequency

Date/Time: 4/23/2010 4:54:52 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 5 Middle/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.546 mW/g

**Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 0.789 W/kg

**SAR(1 g) = 0.428 mW/g; SAR(10 g) = 0.261 mW/g**

Maximum value of SAR (measured) = 0.517 mW/g

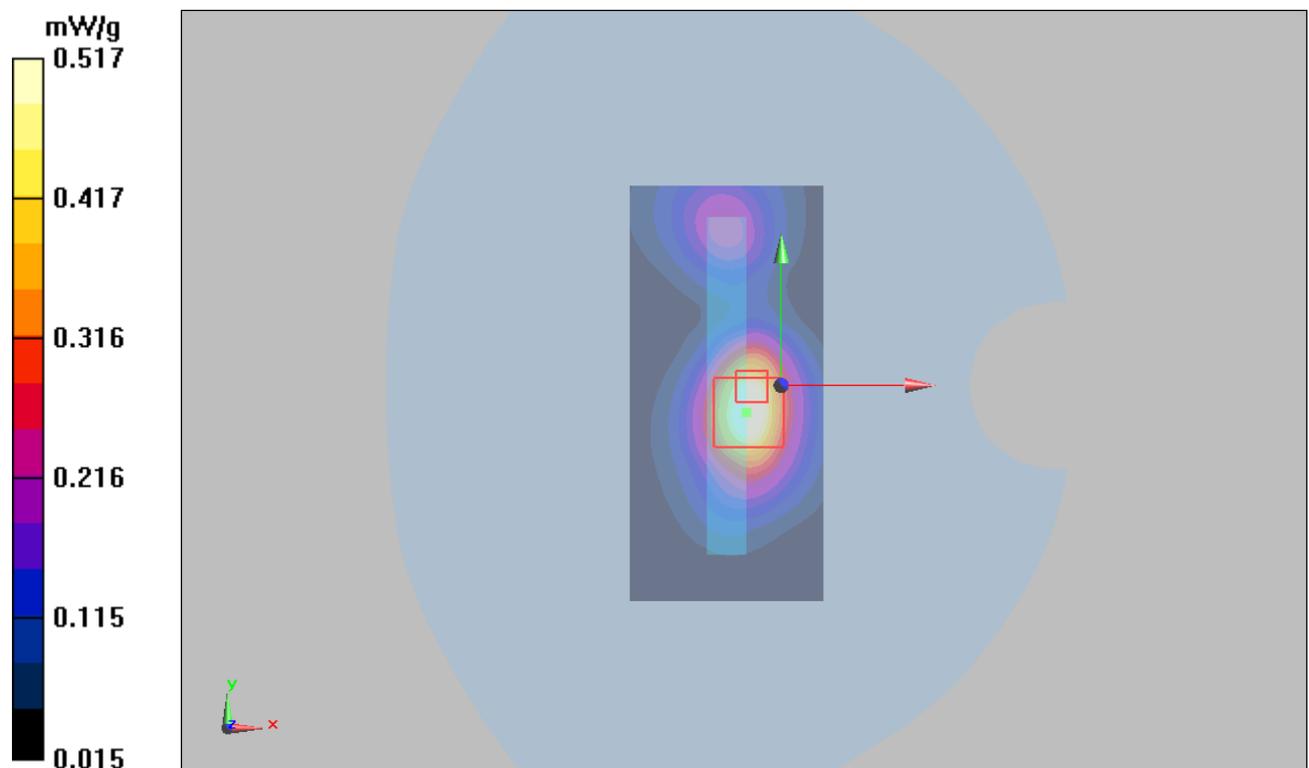


Figure 23 GSM 1900 GPRS (2 timeslots in uplink) with Lenovo Y450 Test Position 5 Channel 661

**GSM 1900 EGPRS (4 timeslots in uplink) with IBM T61 Test Position 1 Low Frequency**

Date/Time: 4/23/2010 11:23:27 AM

Communication System: PCS 1900+EGPRS(4Up); Frequency: 1850.2 MHz; Duty Cycle: 1:2.075

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Low/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.584 mW/g

**Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.5 V/m; Power Drift = -0.143 dB

Peak SAR (extrapolated) = 0.901 W/kg

**SAR(1 g) = 0.532 mW/g; SAR(10 g) = 0.321 mW/g**

Maximum value of SAR (measured) = 0.571 mW/g

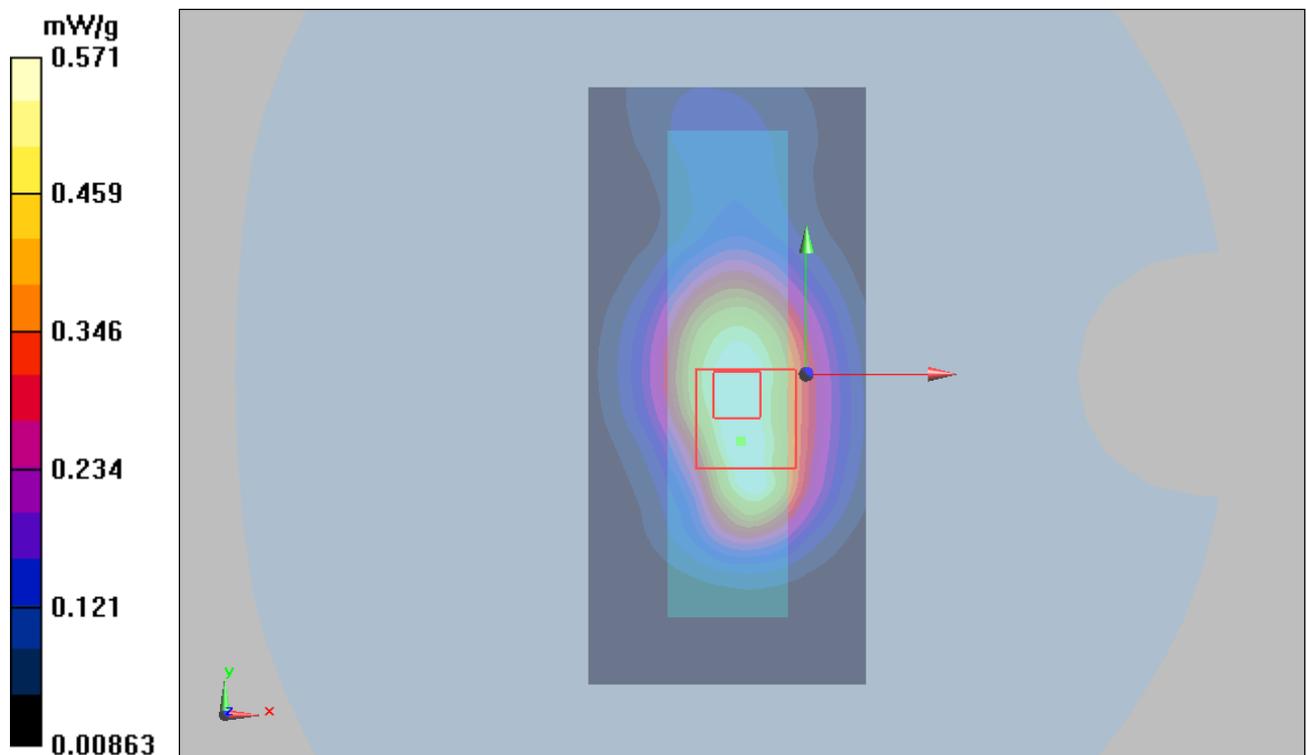


Figure 24 GSM 1900 EGPRS (4 timeslots in uplink) with IBM T61 Test Position 1 Channel 512

### WCDMA Band II with IBM T61 Test Position 1 High Frequency

Date/Time: 4/22/2010 5:26:02 PM

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 High/Area Scan (61x141x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.868 mW/g

**Test Position 1 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 1.44 W/kg

**SAR(1 g) = 0.763 mW/g; SAR(10 g) = 0.435 mW/g**

Maximum value of SAR (measured) = 0.838 mW/g

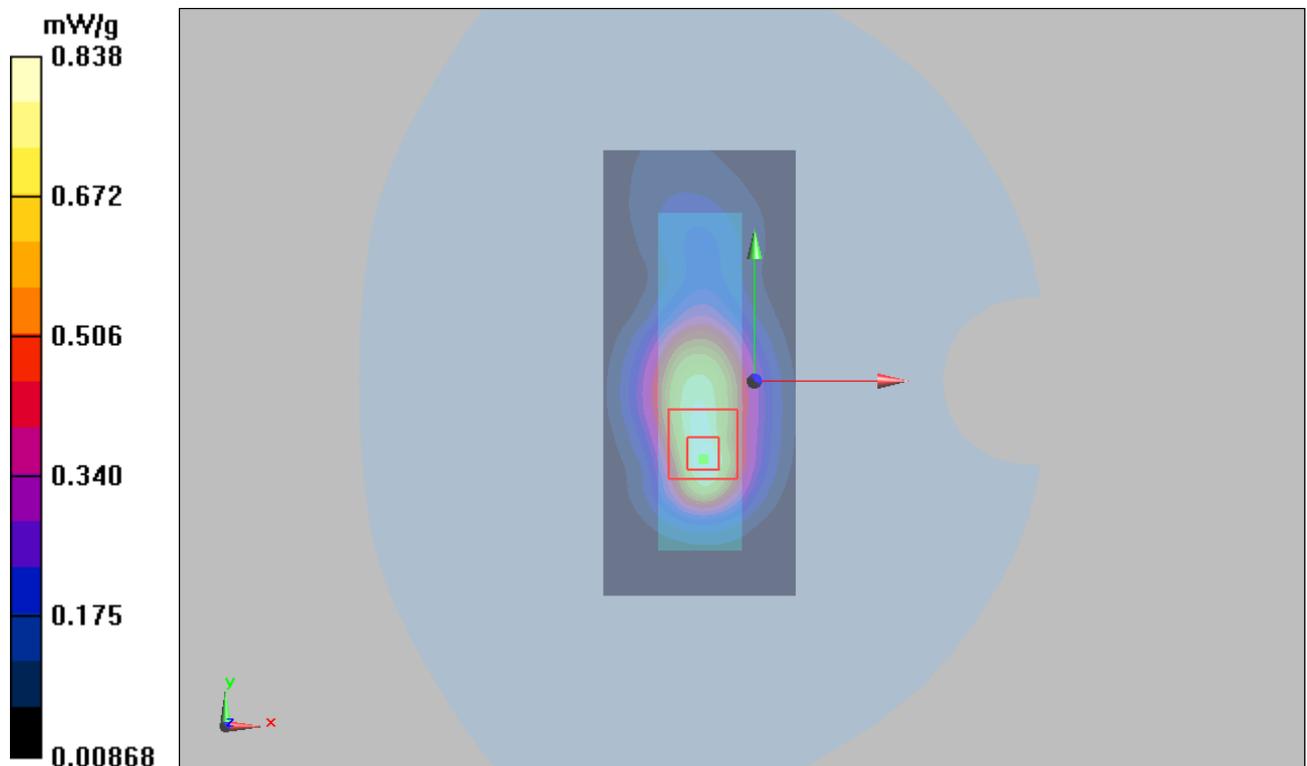


Figure 25 WCDMA Band II with IBM T61 Test Position 1 Channel 9538

### WCDMA Band II with IBM T61 Test Position 1 Middle Frequency

Date/Time: 4/22/2010 4:27:49 PM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Middle/Area Scan (61x141x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.03 mW/g

**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.1 V/m; Power Drift = -0.085 dB

Peak SAR (extrapolated) = 1.65 W/kg

**SAR(1 g) = 0.868 mW/g; SAR(10 g) = 0.489 mW/g**

Maximum value of SAR (measured) = 0.955 mW/g

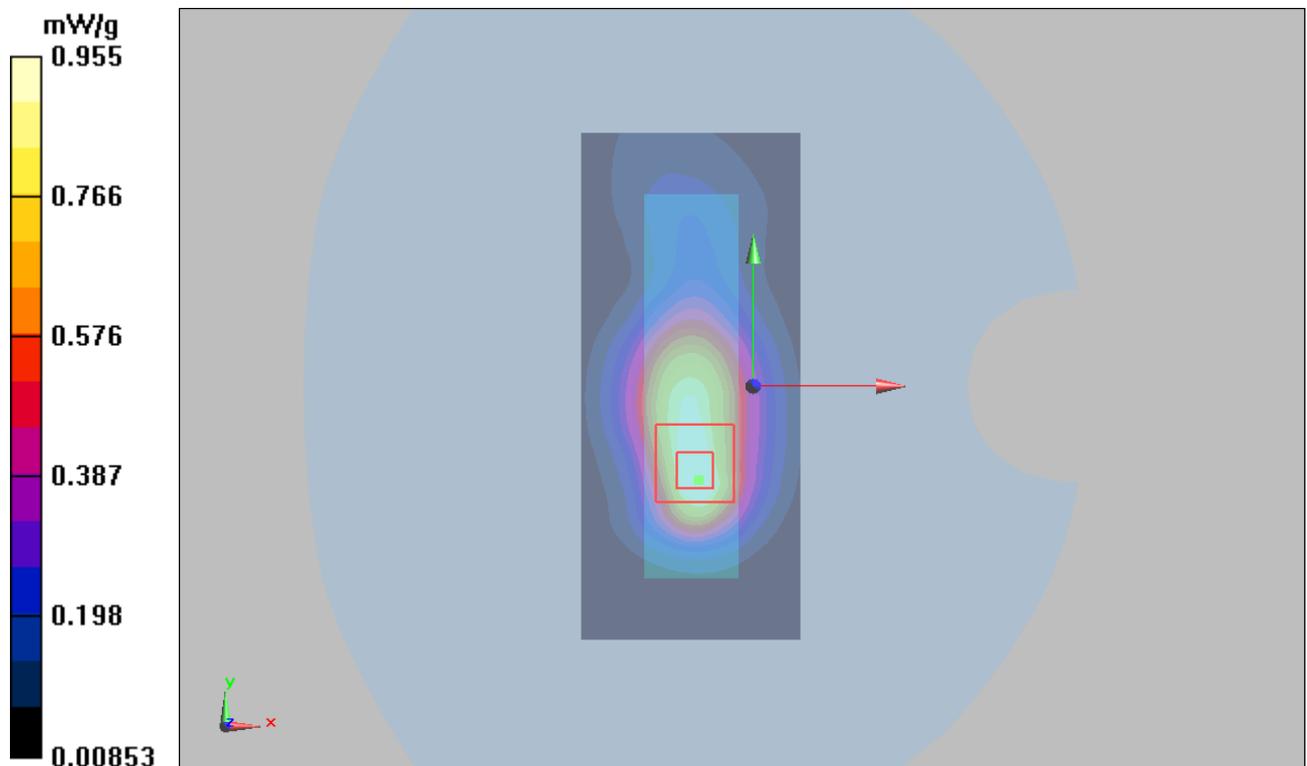


Figure 26 WCDMA Band II with IBM T61 Test Position 1 Channel 9400

### WCDMA Band II with IBM T61 Test Position 1 Low Frequency

Date/Time: 4/22/2010 4:49:50 PM

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Low/Area Scan (61x141x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.19 mW/g

**Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.3 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 1.91 W/kg

**SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.593 mW/g**

Maximum value of SAR (measured) = 1.13 mW/g

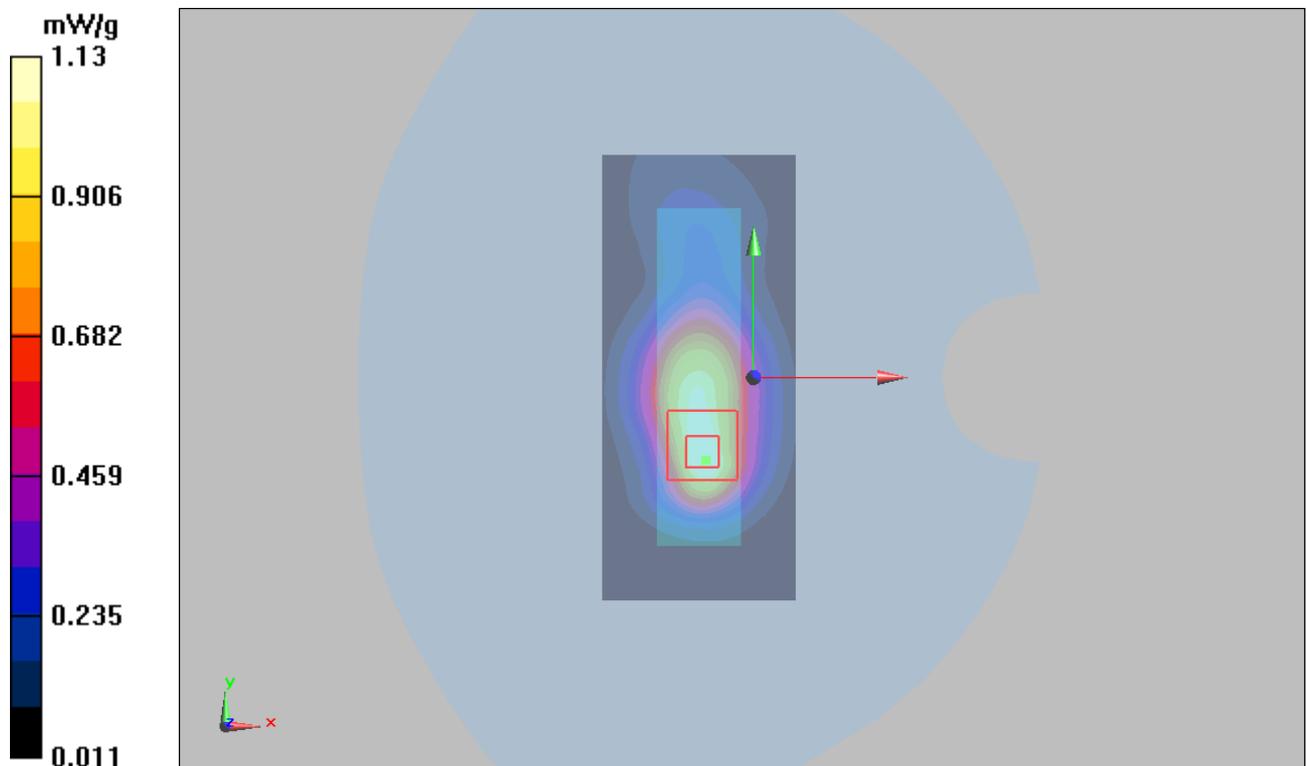


Figure 27 WCDMA Band II with IBM T61 Test Position 1 Channel 9262

**WCDMA Band II with IBM T61 Test Position 2 High Frequency**

Date/Time: 4/23/2010 8:07:30 AM

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 2 High/Area Scan (61x141x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.783 mW/g

**Test Position 2 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.3 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 1.33 W/kg

**SAR(1 g) = 0.677 mW/g; SAR(10 g) = 0.380 mW/g**

Maximum value of SAR (measured) = 0.729 mW/g

**Test Position 2 High/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.3 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 0.771 W/kg

**SAR(1 g) = 0.404 mW/g; SAR(10 g) = 0.203 mW/g**

Maximum value of SAR (measured) = 0.457 mW/g

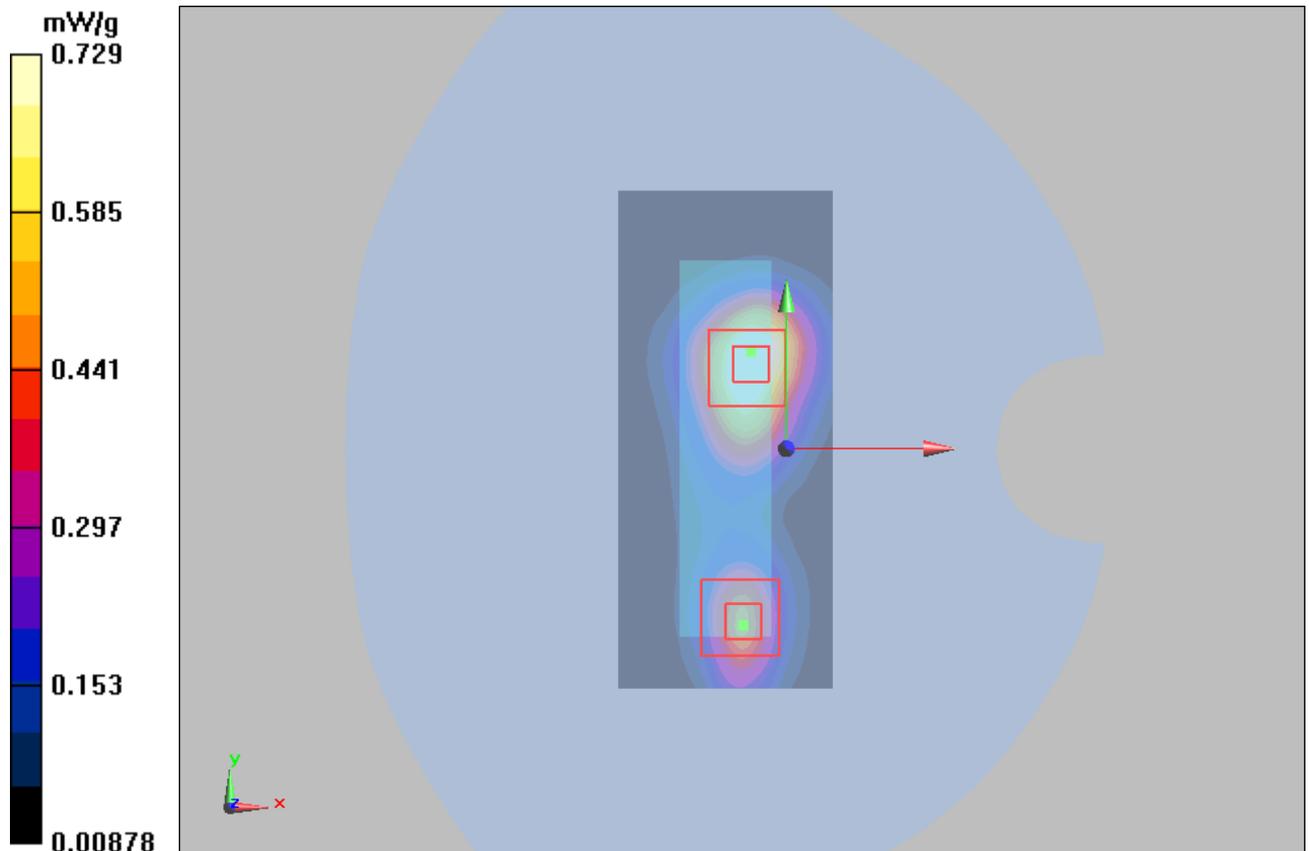


Figure 28 WCDMA Band II with IBM T61 Test Position 2 Channel 9538

### WCDMA Band II with IBM T61 Test Position 2 Middle Frequency

Date/Time: 4/22/2010 7:09:15 PM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 2 Middle/Area Scan (61x141x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.14 mW/g

**Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.1 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 1.85 W/kg

**SAR(1 g) = 0.977 mW/g; SAR(10 g) = 0.541 mW/g**

Maximum value of SAR (measured) = 1.06 mW/g

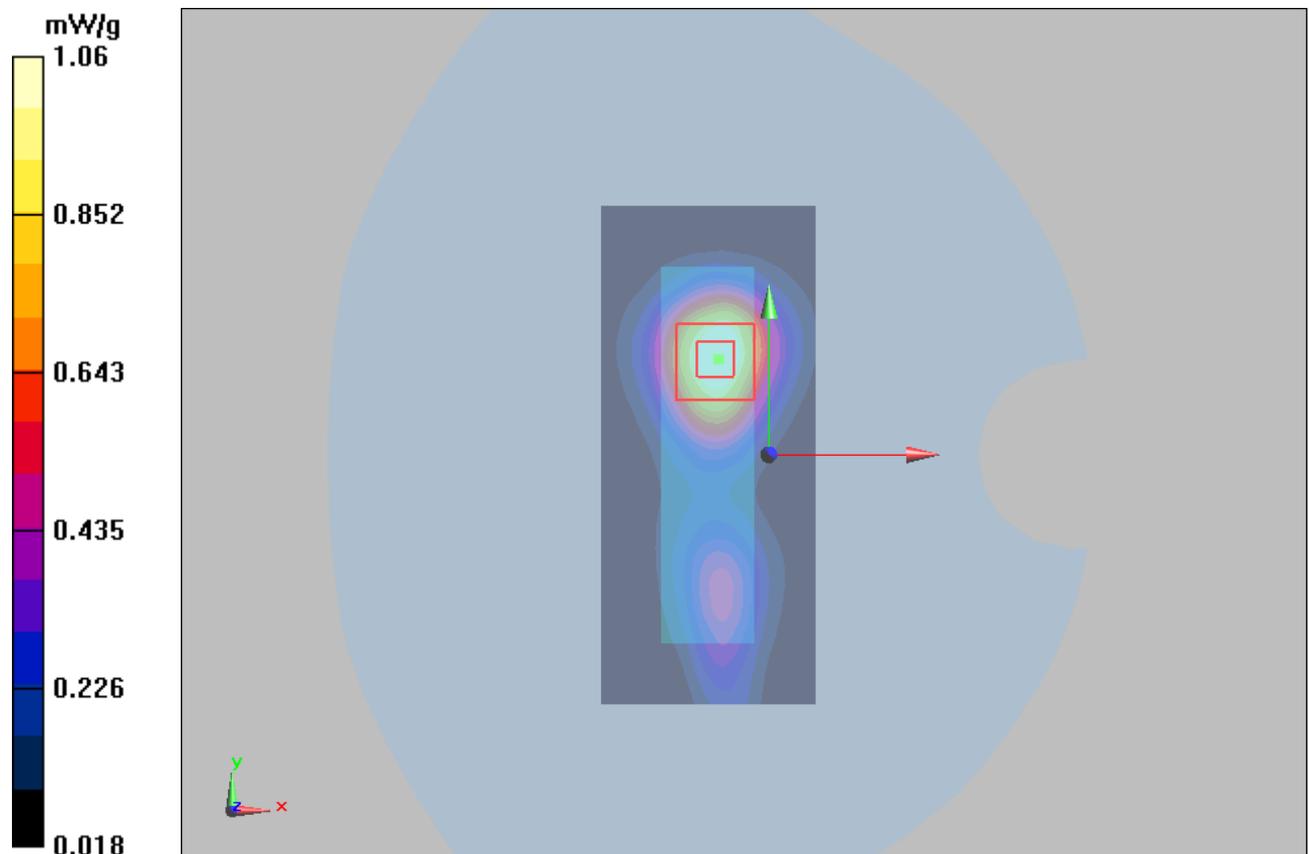


Figure 29 WCDMA Band II with IBM T61 Test Position 2 Channel 9400

### WCDMA Band II with IBM T61 Test Position 2 Low Frequency

Date/Time: 4/22/2010 7:25:01 PM

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 2 Low/Area Scan (61x141x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.31 mW/g


**Test Position 2 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.5 V/m; Power Drift = -0.174 dB

Peak SAR (extrapolated) = 2.18 W/kg

**SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.629 mW/g**

Maximum value of SAR (measured) = 1.26 mW/g

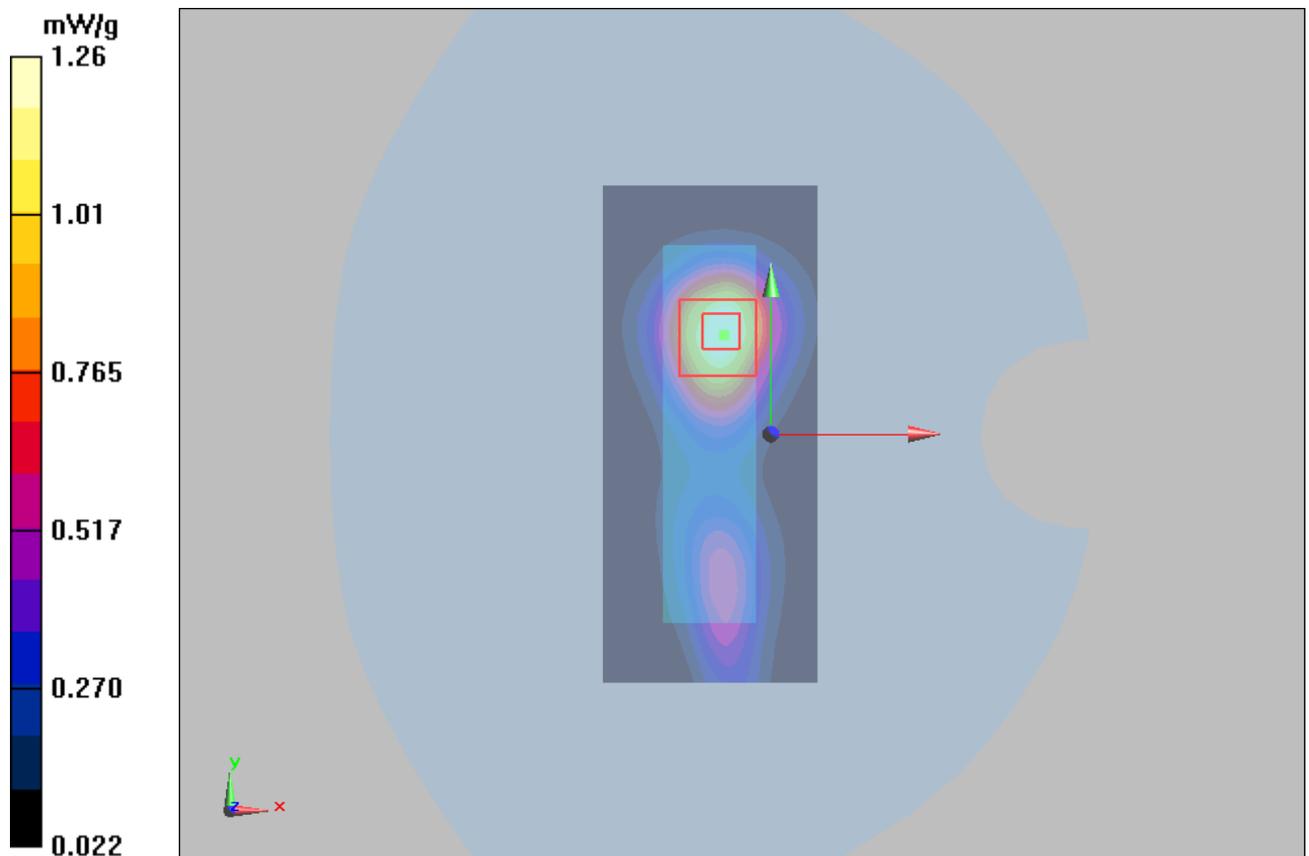

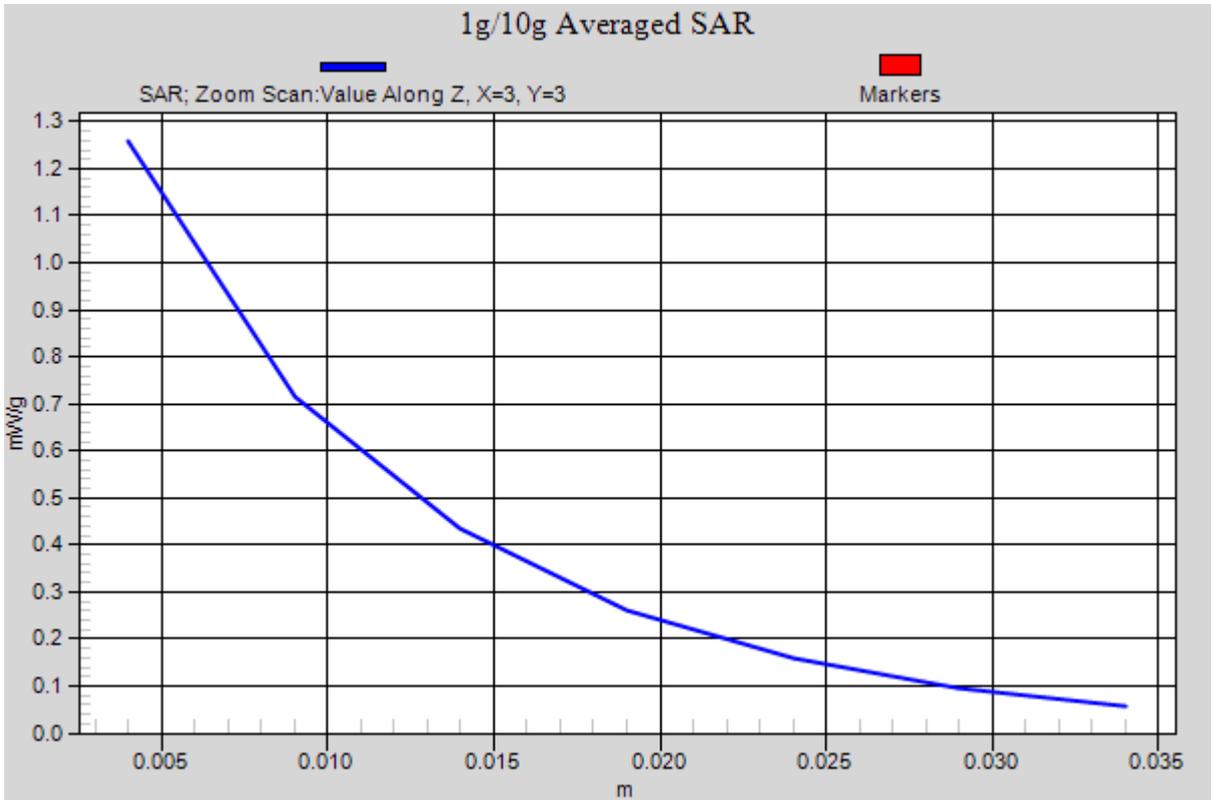


Figure 30 WCDMA Band II with IBM T61 Test Position 2 Channel 9262

### WCDMA Band II with IBM T61 Test Position 3 Middle Frequency

Date/Time: 4/22/2010 6:36:13 PM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 3 Middle/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.550 mW/g

**Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.3 V/m; Power Drift = -0.151 dB

Peak SAR (extrapolated) = 2.24 W/kg

**SAR(1 g) = 0.533 mW/g; SAR(10 g) = 0.234 mW/g**

Maximum value of SAR (measured) = 0.567 mW/g

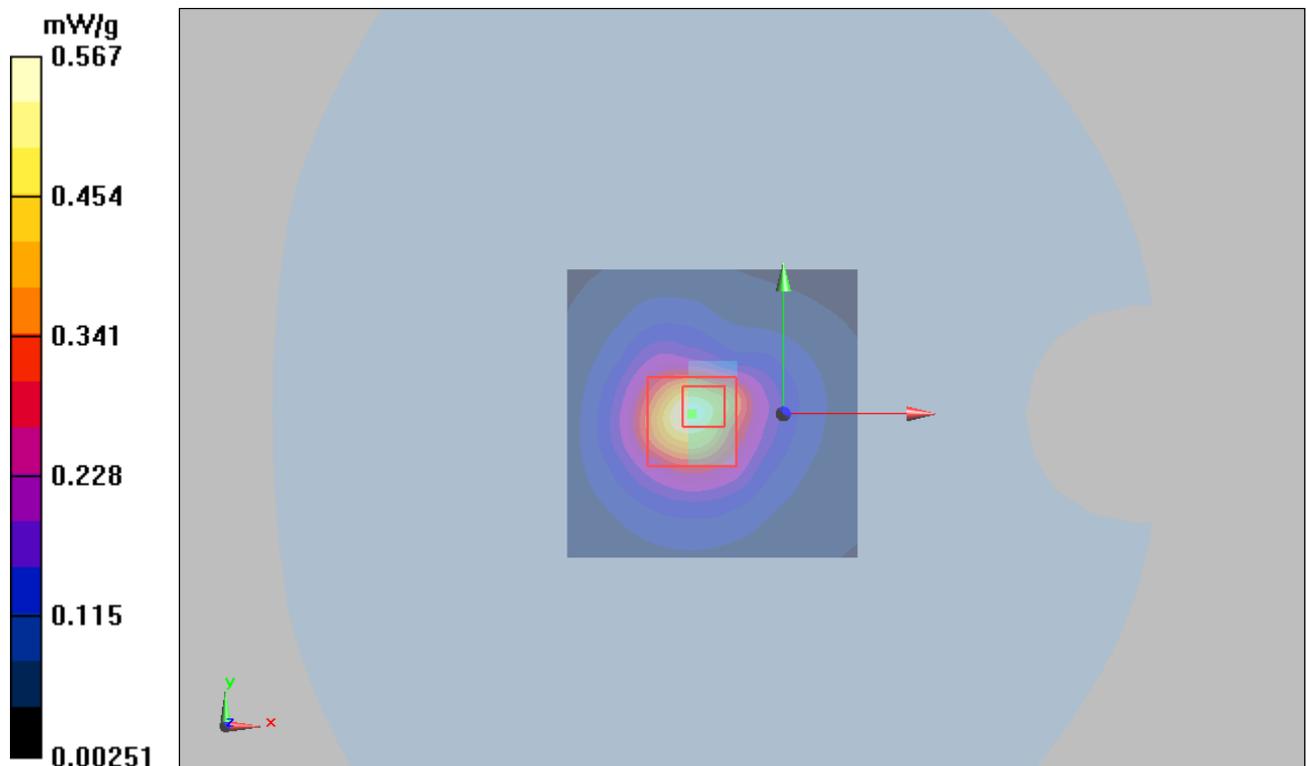


Figure 31 WCDMA Band II with IBM T61 Test Position 3 Channel 9400

### WCDMA Band II with Lenovo Y450 Test Position 4 Middle Frequency

Date/Time: 4/22/2010 2:48:01 PM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 4 Middle/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.849 mW/g

**Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.7 V/m; Power Drift = 0.095 dB

Peak SAR (extrapolated) = 1.56 W/kg

**SAR(1 g) = 0.773 mW/g; SAR(10 g) = 0.407 mW/g**

Maximum value of SAR (measured) = 0.852 mW/g

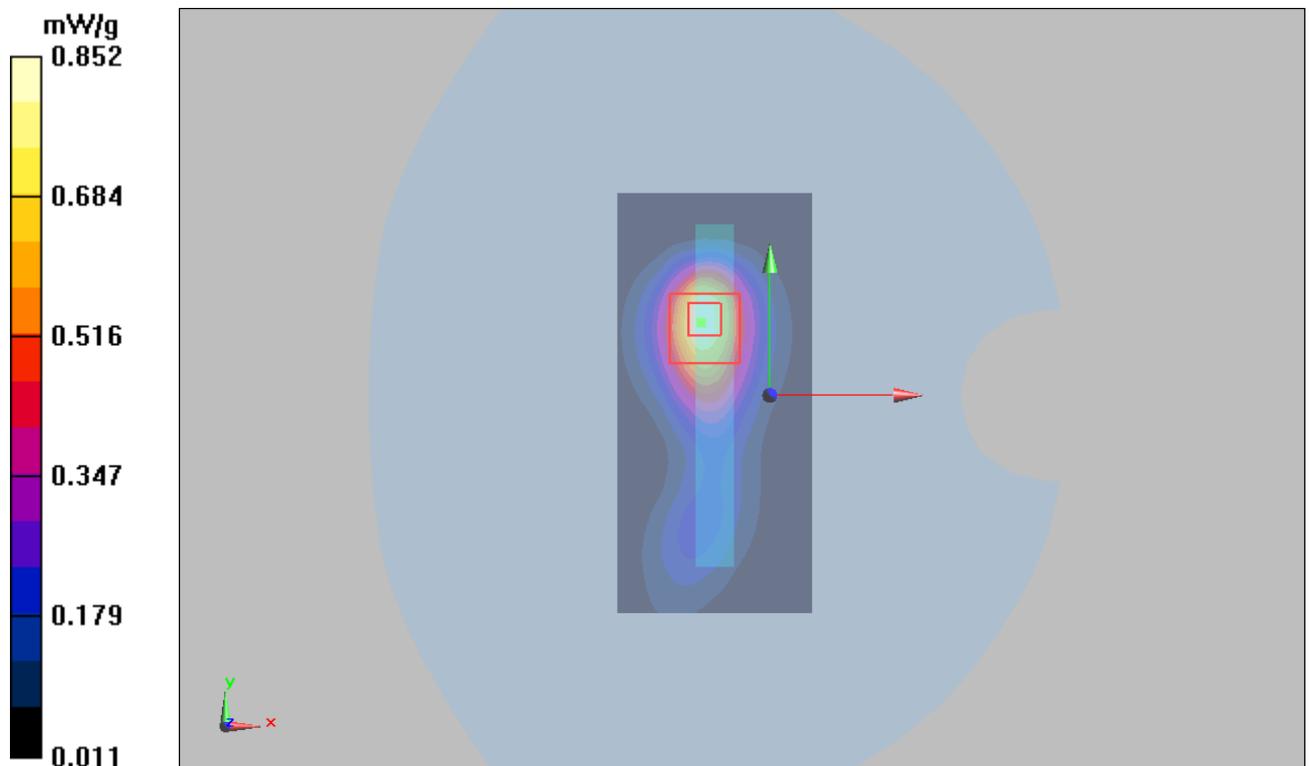


Figure 32 WCDMA Band II with Lenovo Y450 Test Position 4 Channel 9400

### WCDMA Band II with Lenovo Y450 Test Position 5 Middle Frequency

Date/Time: 4/22/2010 3:50:18 PM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 5 Middle/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.912 mW/g

**Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.5 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.73 W/kg

**SAR(1 g) = 0.749 mW/g; SAR(10 g) = 0.440 mW/g**

Maximum value of SAR (measured) = 0.928 mW/g

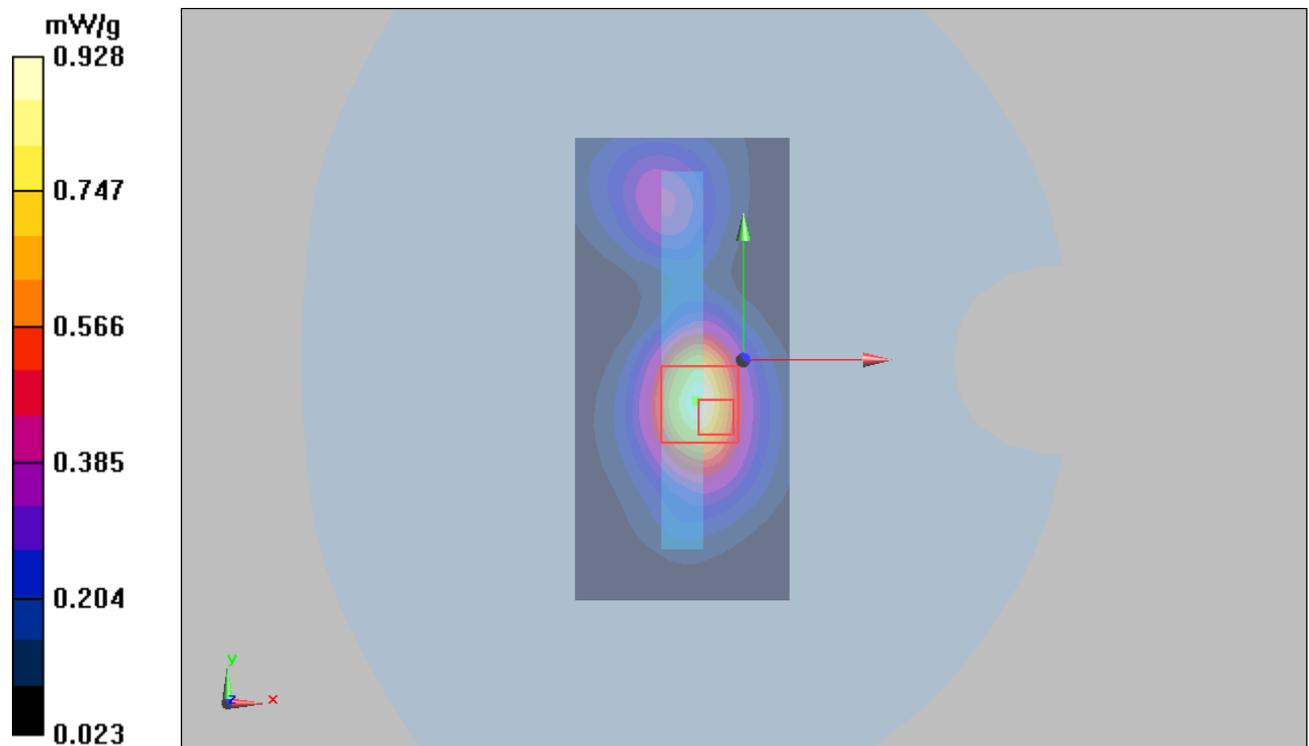


Figure 33 WCDMA Band II with Lenovo Y450 Test Position 5 Channel 9400

### WCDMA Band II+HSDPA with IBM T61 Test Position 2 Low Frequency

Date/Time: 4/23/2010 9:22:18 AM

Communication System: WCDMA Band II+HSDPA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 2 Low/Area Scan (61x141x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.15 mW/g

**Test Position 2 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.9 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 1.92 W/kg

**SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.566 mW/g**

Maximum value of SAR (measured) = 1.12 mW/g

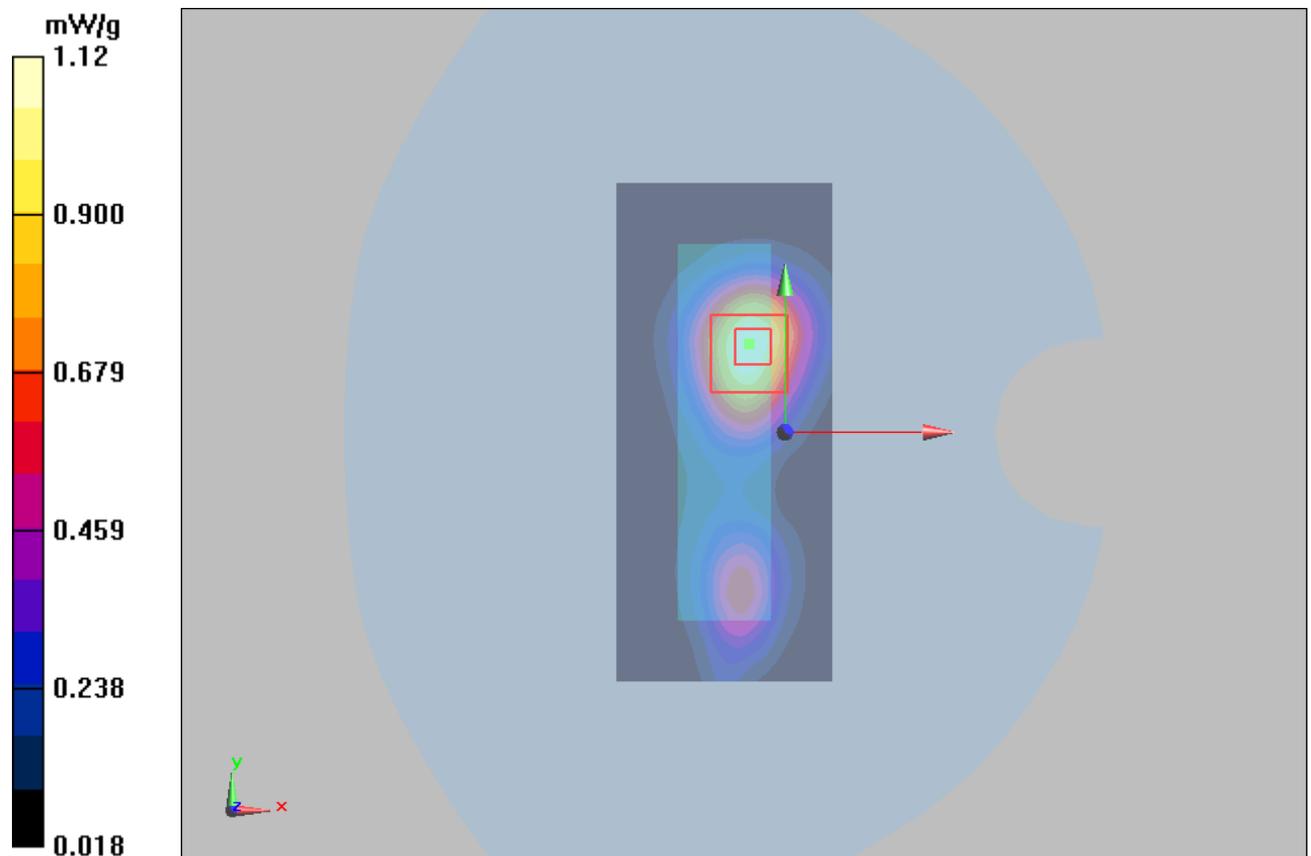


Figure 34 WCDMA Band II+HSDPA with IBM T61 Test Position 2 Channel 9262

### WCDMA Band II+HSUPA with IBM T61 Test Position 2 Low Frequency

Date/Time: 4/23/2010 9:54:24 AM

Communication System: WCDMA Band II+HSUPA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 2 Low/Area Scan (61x141x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.756 mW/g

**Test Position 2 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.4 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 1.24 W/kg

**SAR(1 g) = 0.678 mW/g; SAR(10 g) = 0.381 mW/g**

Maximum value of SAR (measured) = 0.734 mW/g

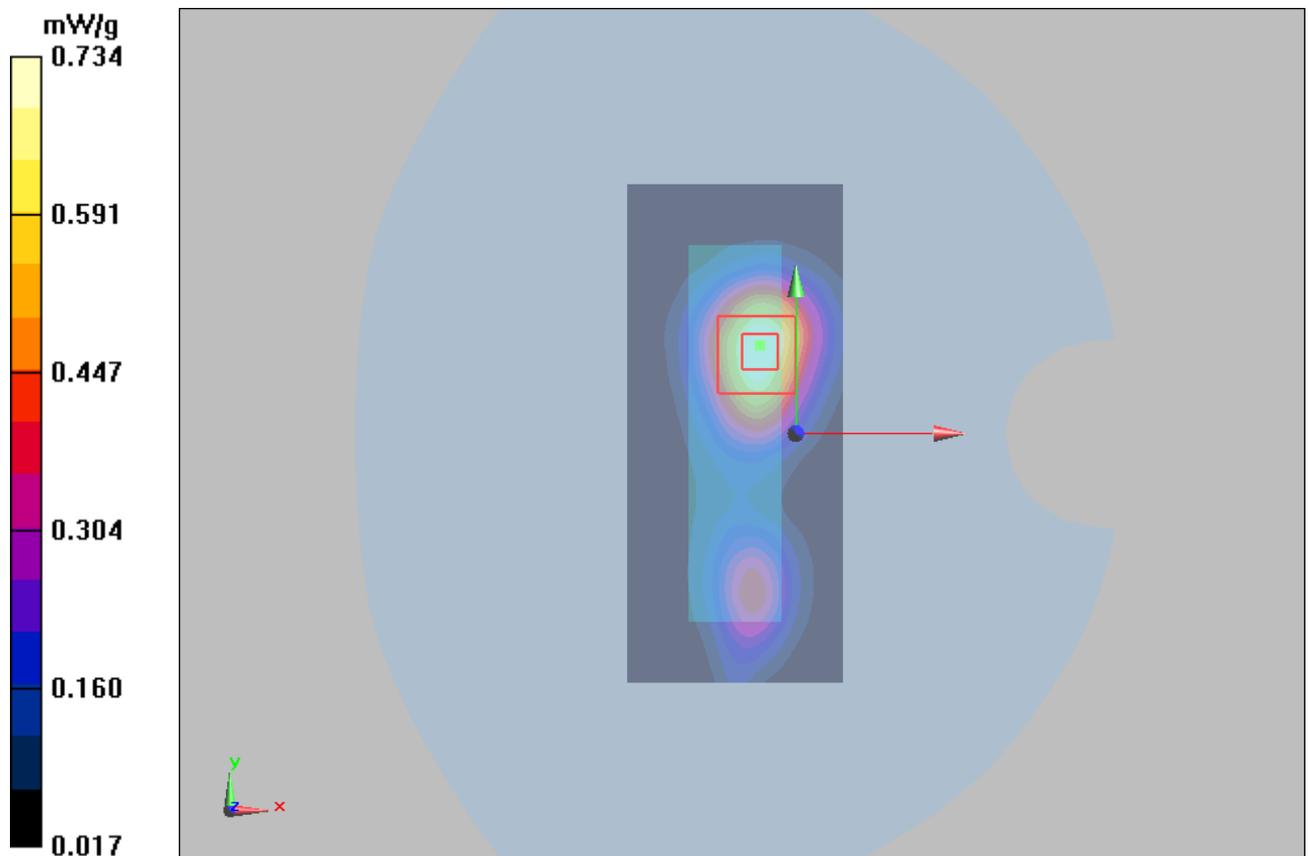


Figure 35 WCDMA Band II+HSUPA with IBM T61 Test Position 2 Channel 9262

### WCDMA Band IV with IBM T61 Test Position 1 Middle Frequency

Date/Time: 4/24/2010 10:07:05 PM

Communication System: WCDMA Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.48$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.7, 7.7, 7.7); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Middle/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.791 mW/g

**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.5 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 1.11 W/kg

**SAR(1 g) = 0.672 mW/g; SAR(10 g) = 0.399 mW/g**

Maximum value of SAR (measured) = 0.730 mW/g

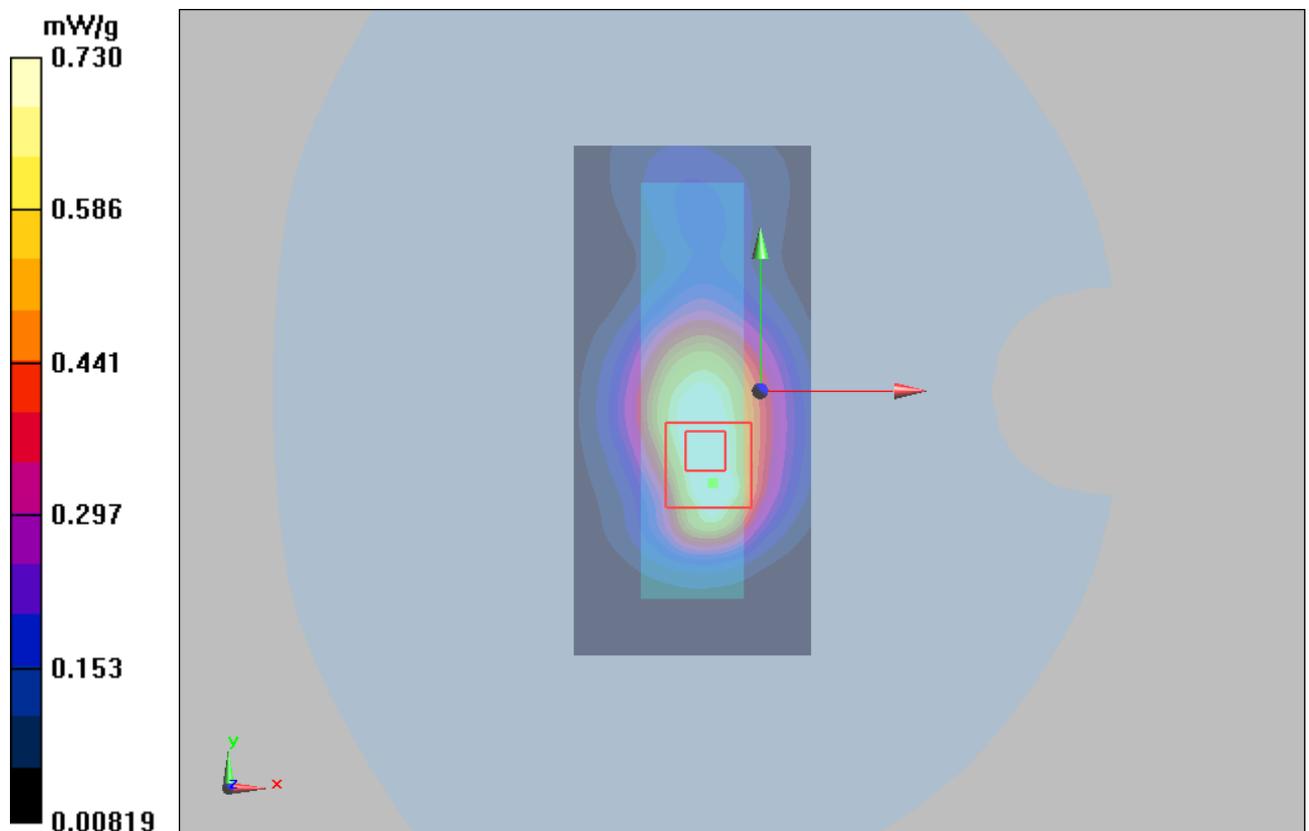


Figure 36 WCDMA Band IV with IBM T61 Test Position 1 Channel 1412

### WCDMA Band IV with IBM T61 Test Position 2 High Frequency

Date/Time: 4/24/2010 5:04:05 PM

Communication System: WCDMA Band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1752.6$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.7, 7.7, 7.7); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 2 High/Area Scan (61x141x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.38 mW/g


**Test Position 2 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.2 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 2.04 W/kg

**SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.638 mW/g**

Maximum value of SAR (measured) = 1.3 mW/g

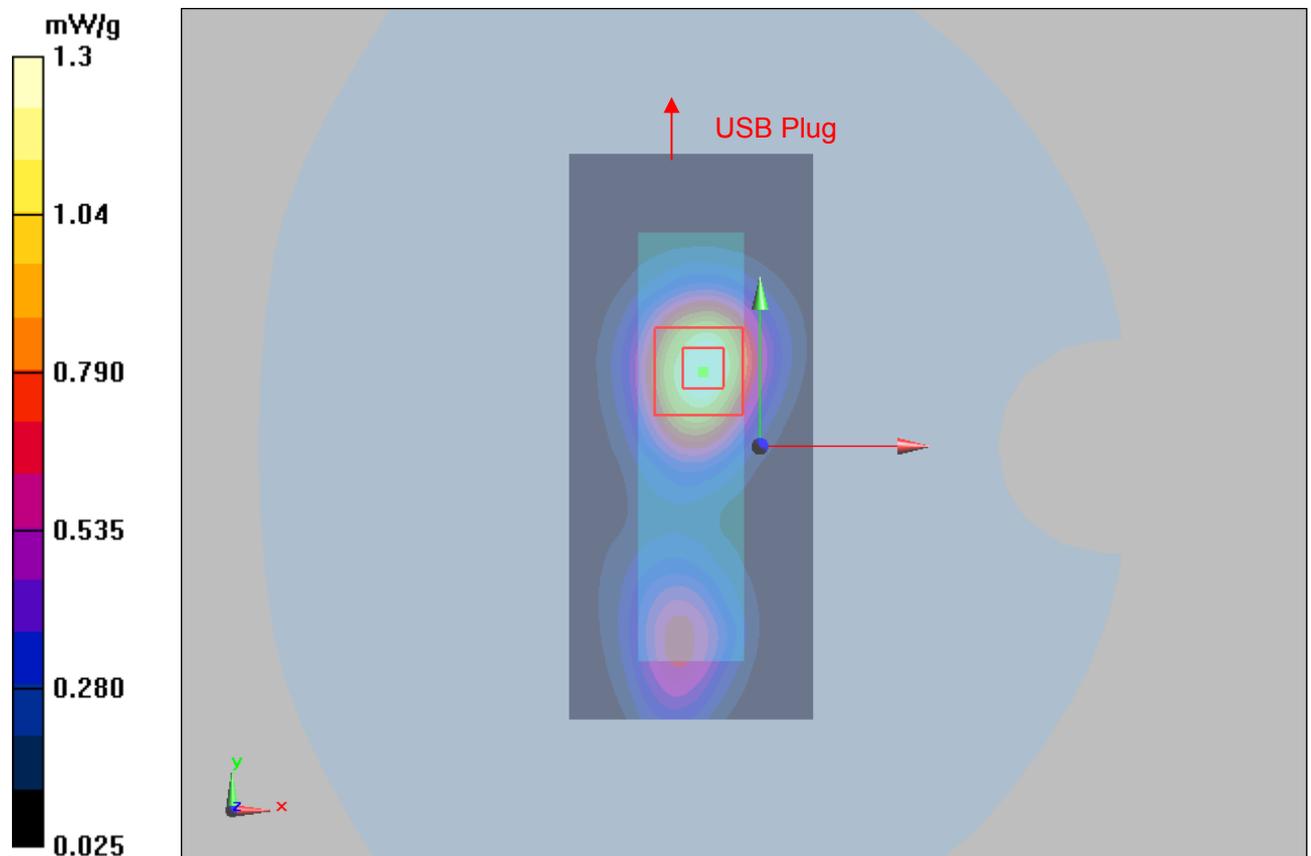

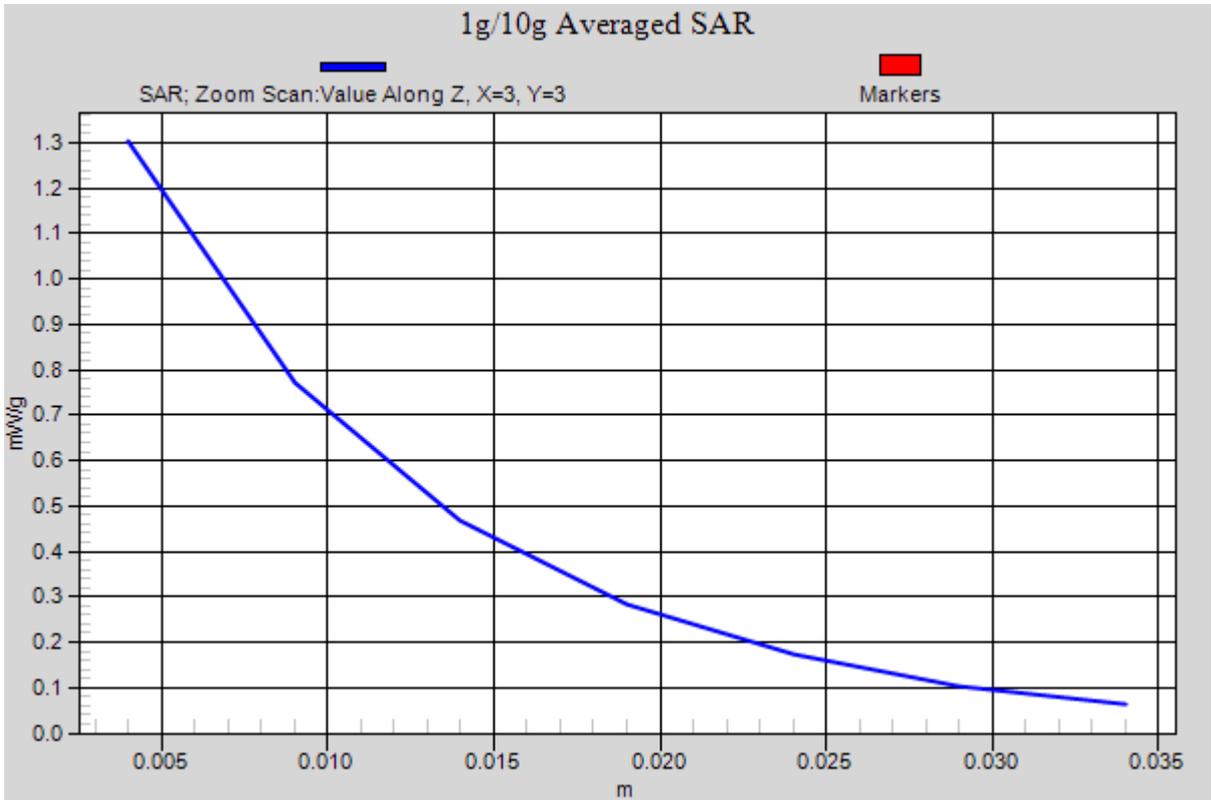


Figure 37 WCDMA Band IV with IBM T61 Test Position 2 Channel 1513

### WCDMA Band IV with IBM T61 Test Position 2 Middle Frequency

Date/Time: 4/24/2010 6:20:09 PM

Communication System: WCDMA Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.48$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.7, 7.7, 7.7); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 2 Middle/Area Scan (61x141x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.09 mW/g

**Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.5 V/m; Power Drift = 0.110 dB

Peak SAR (extrapolated) = 1.68 W/kg

**SAR(1 g) = 0.965 mW/g; SAR(10 g) = 0.524 mW/g**

Maximum value of SAR (measured) = 1.07 mW/g

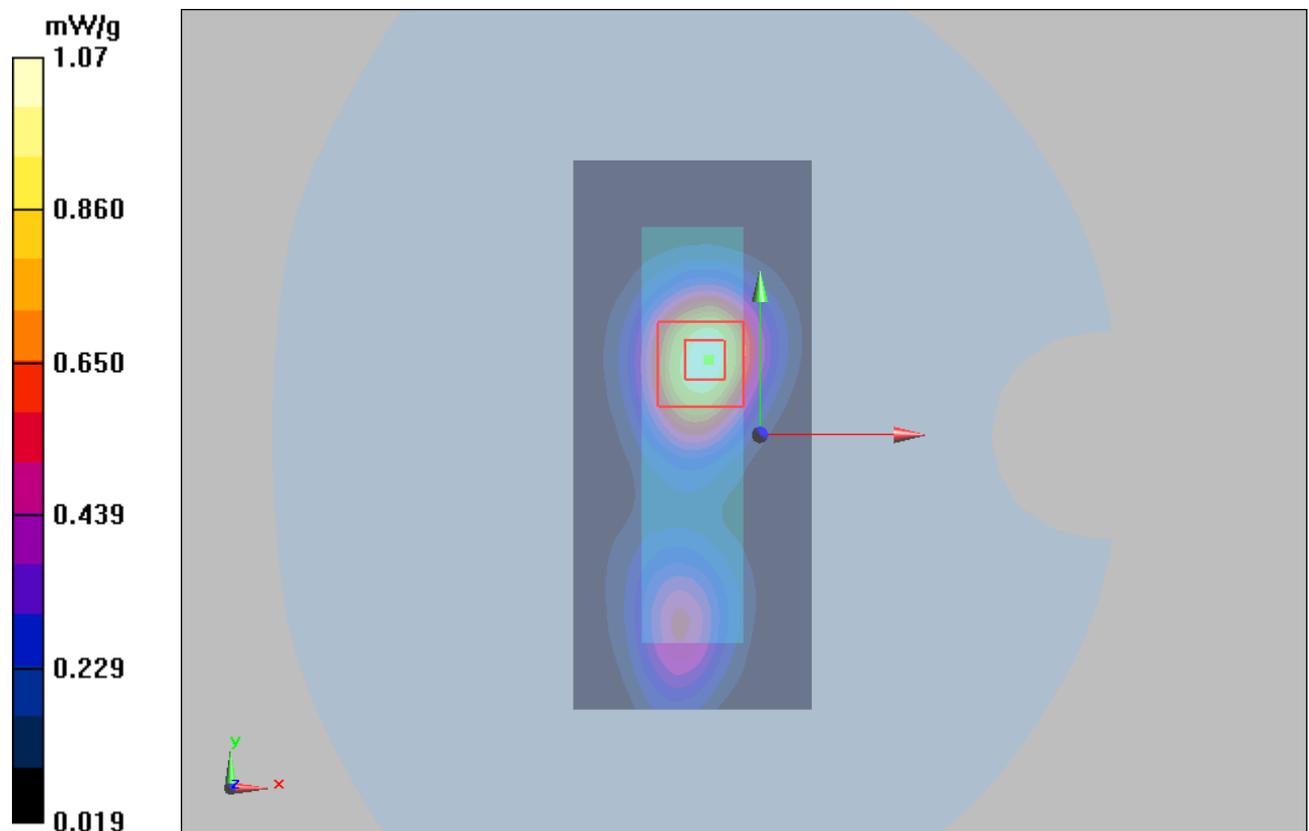


Figure 38 WCDMA Band IV with IBM T61 Test Position 2 Channel 1412

### WCDMA Band IV with IBM T61 Test Position 2 Low Frequency

Date/Time: 4/24/2010 5:49:20 PM

Communication System: WCDMA Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1712.4$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 52.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.7, 7.7, 7.7); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 2 Low/Area Scan (61x141x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.37 mW/g

**Test Position 2 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.4 V/m; Power Drift = -0.081 dB

Peak SAR (extrapolated) = 1.88 W/kg

**SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.592 mW/g**

Maximum value of SAR (measured) = 1.21 mW/g

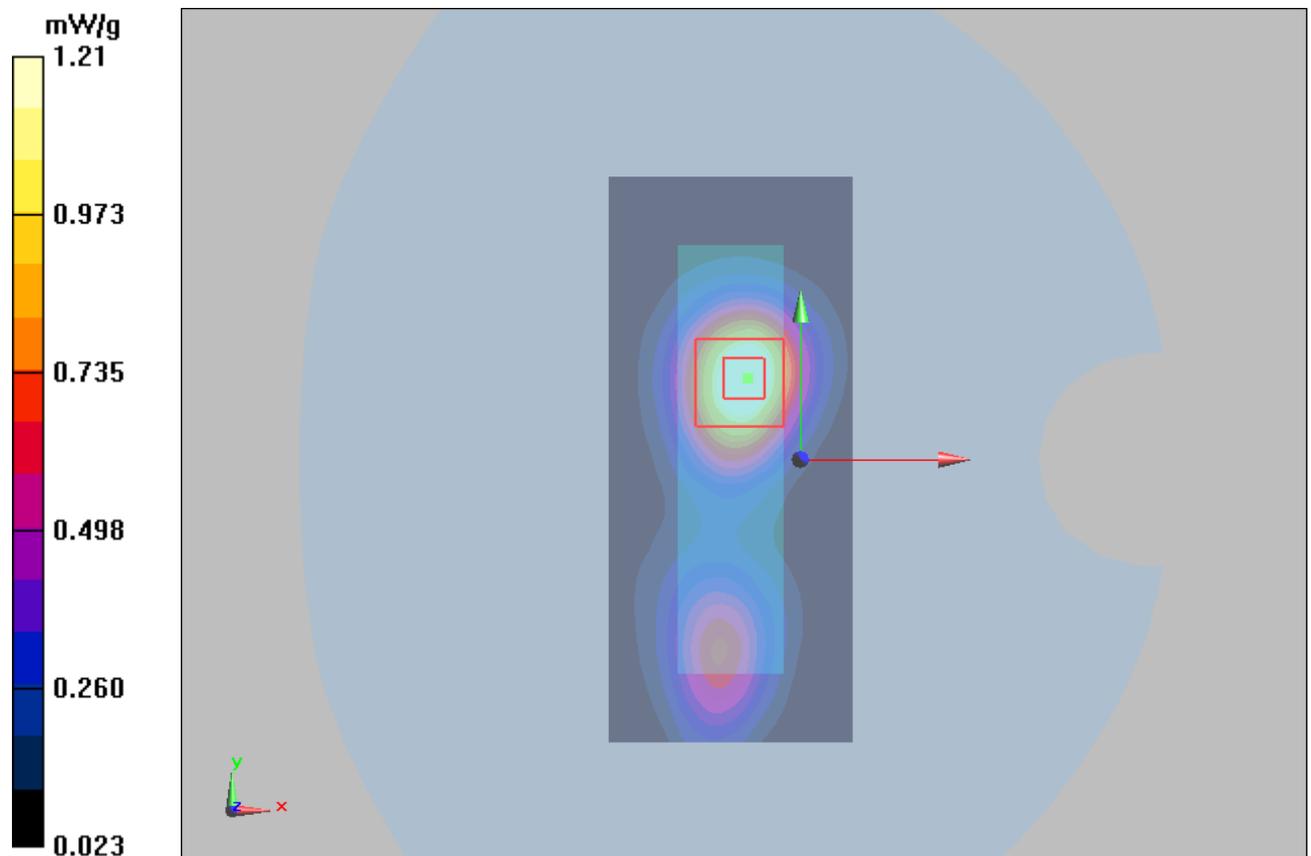


Figure 39 WCDMA Band IV with IBM T61 Test Position 2 Channel 1312

### WCDMA Band IV with IBM T61 Test Position 3 Middle Frequency

Date/Time: 4/24/2010 8:16:39 PM

Communication System: WCDMA Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.48$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.7, 7.7, 7.7); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 3 Middle/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.695 mW/g

**Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 2.78 W/kg

**SAR(1 g) = 0.652 mW/g; SAR(10 g) = 0.286 mW/g**

Maximum value of SAR (measured) = 0.734 mW/g

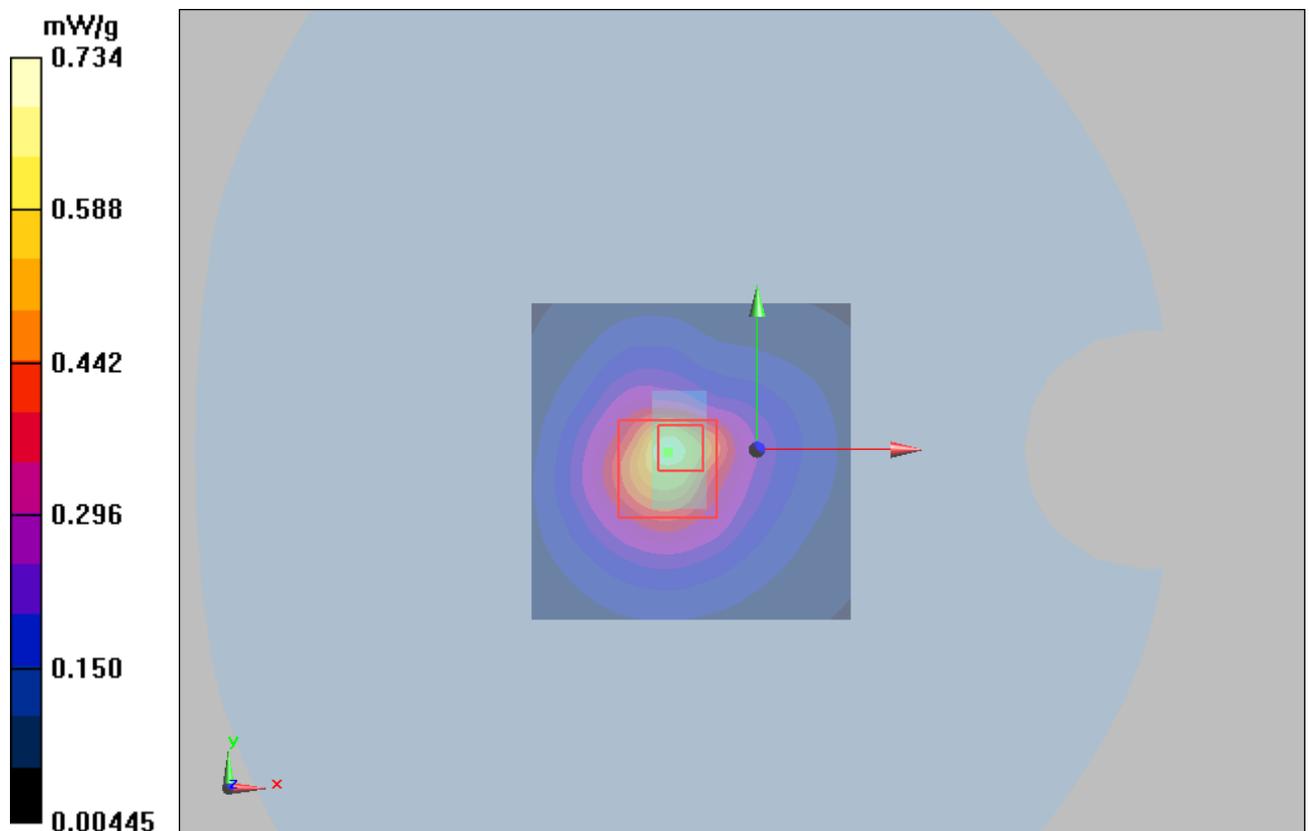


Figure 40 WCDMA Band IV with IBM T61 Test Position 3 Channel 1412

### WCDMA Band IV with Lenovo Y450 Test Position 4 Middle Frequency

Date/Time: 4/24/2010 10:38:10 PM

Communication System: WCDMA Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.48$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.7, 7.7, 7.7); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 4 Middle/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.732 mW/g

**Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.7 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 1.14 W/kg

**SAR(1 g) = 0.633 mW/g; SAR(10 g) = 0.341 mW/g**

Maximum value of SAR (measured) = 0.704 mW/g

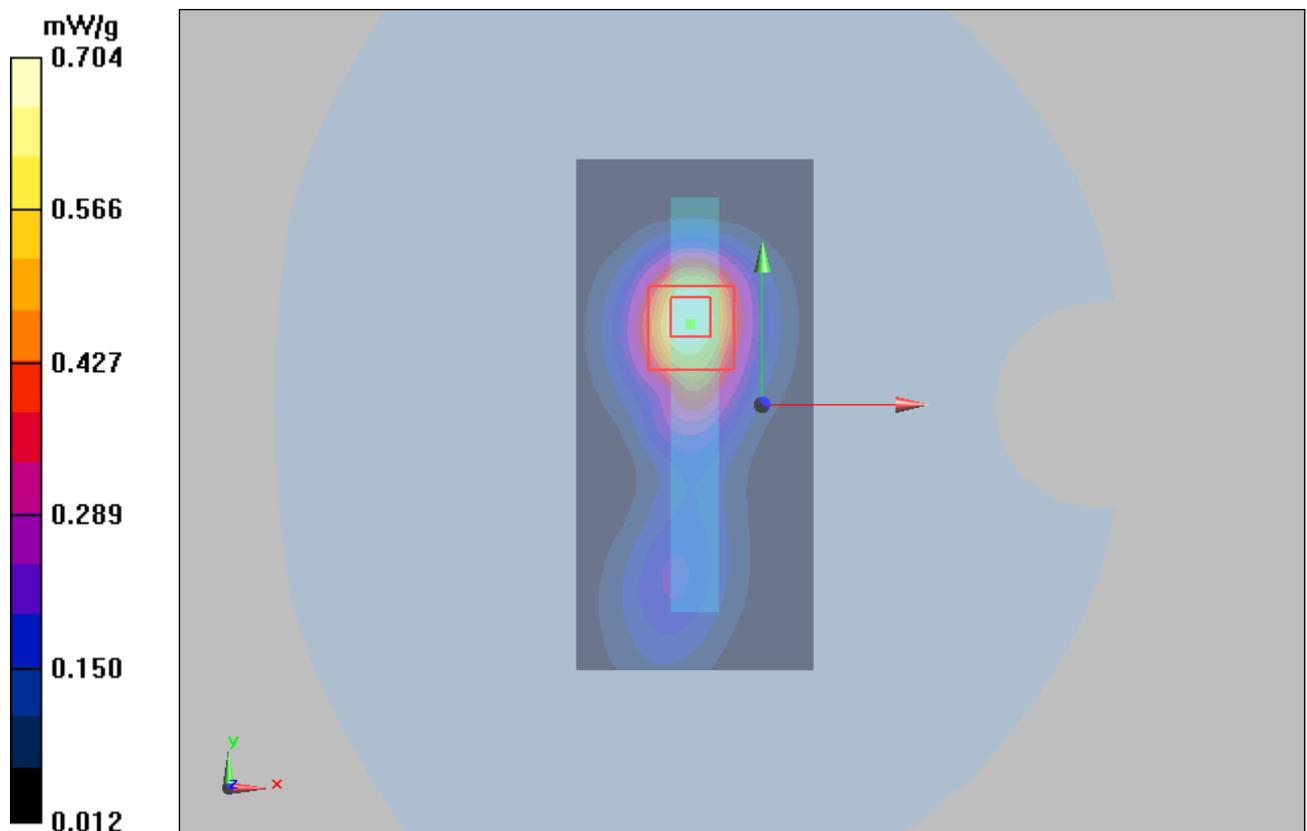


Figure 41 WCDMA Band IV with Lenovo Y450 Test Position 4 Channel 1412

### WCDMA Band IV with Lenovo Y450 Test Position 5 Middle Frequency

Date/Time: 4/24/2010 9:34:26 PM

Communication System: WCDMA Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.48$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.7, 7.7, 7.7); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 5 Middle/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.562 mW/g

**Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.2 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 0.778 W/kg

**SAR(1 g) = 0.482 mW/g; SAR(10 g) = 0.281 mW/g**

Maximum value of SAR (measured) = 0.534 mW/g

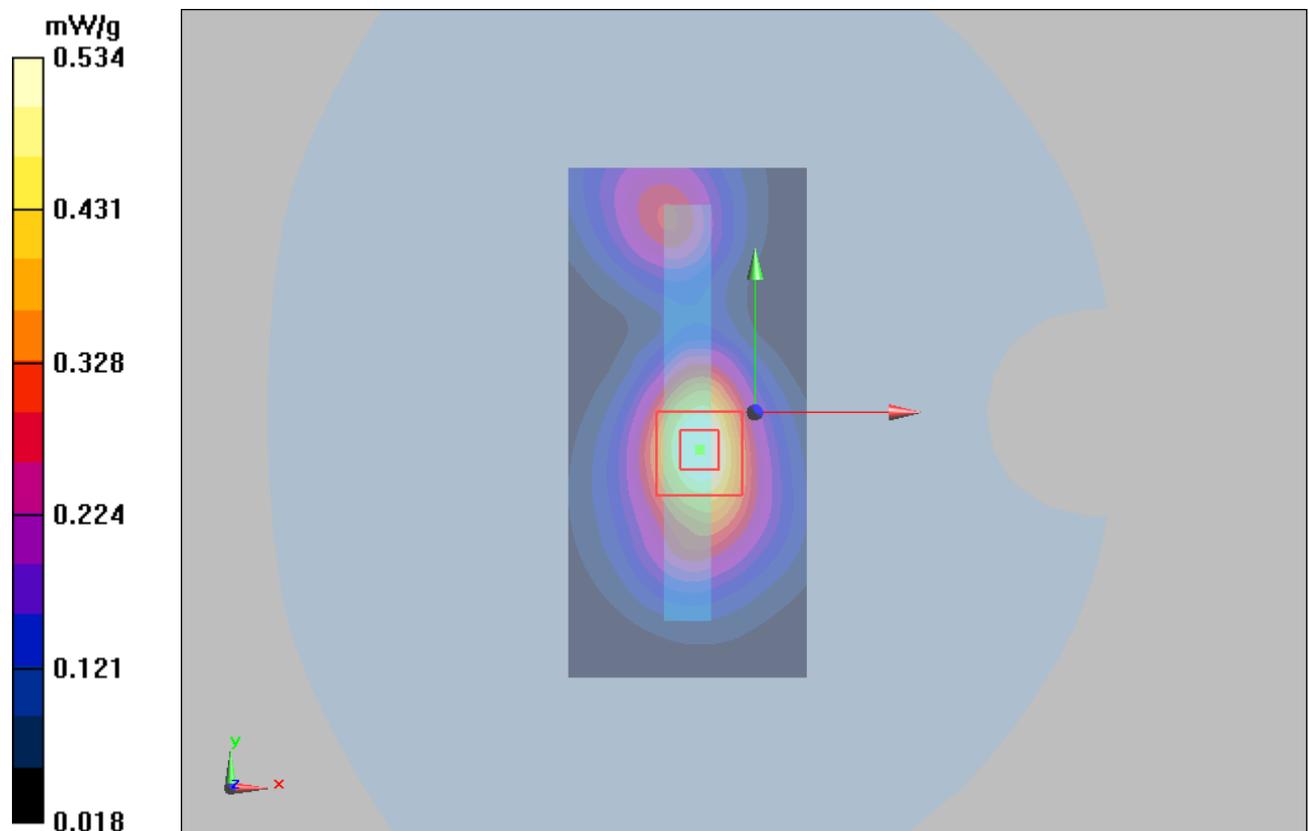


Figure 42 WCDMA Band IV with Lenovo Y450 Test Position 5 Channel 1412

### WCDMA Band IV +HSDPA with IBM T61 Test Position 2 High Frequency

Date/Time: 4/24/2010 7:10:06 PM

Communication System: WCDMA Band IV+HSDPA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1752.6$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.7, 7.7, 7.7); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 2 High/Area Scan (61x141x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.34 mW/g

**Test Position 2 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21 V/m; Power Drift = 0.132 dB

Peak SAR (extrapolated) = 2.05 W/kg

**SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.636 mW/g**

Maximum value of SAR (measured) = 1.31 mW/g

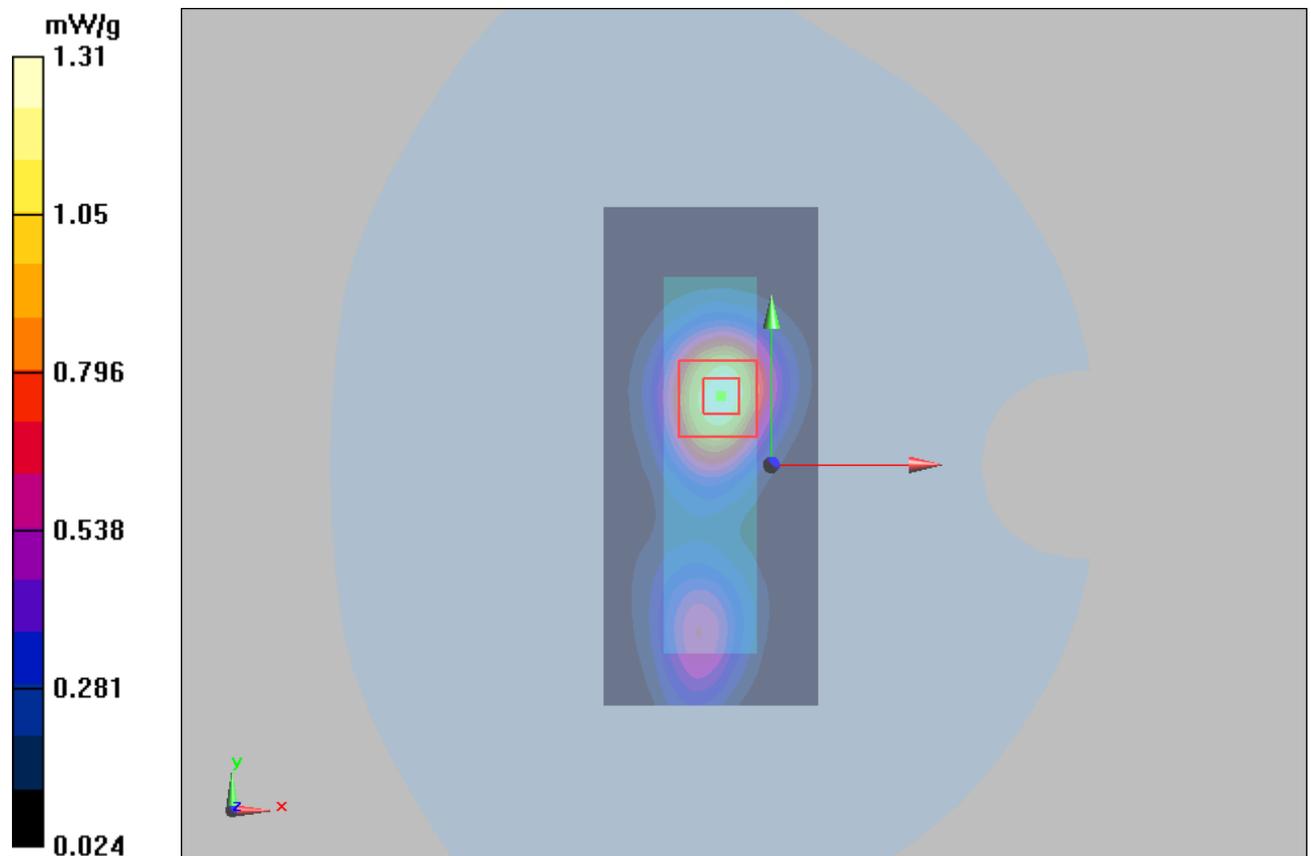


Figure 43 WCDMA Band IV +HSDPA with IBM T61 Test Position 2 Channel 1513

### WCDMA Band IV +HSUPA with IBM T61 Test Position 2 High Frequency

Date/Time: 4/24/2010 7:43:10 PM

Communication System: WCDMA Band IV+HSUPA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1752.6$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.7, 7.7, 7.7); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 2 High/Area Scan (61x141x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.08 mW/g

**Test Position 2 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.1 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 1.65 W/kg

**SAR(1 g) = 0.948 mW/g; SAR(10 g) = 0.515 mW/g**

Maximum value of SAR (measured) = 1.06 mW/g

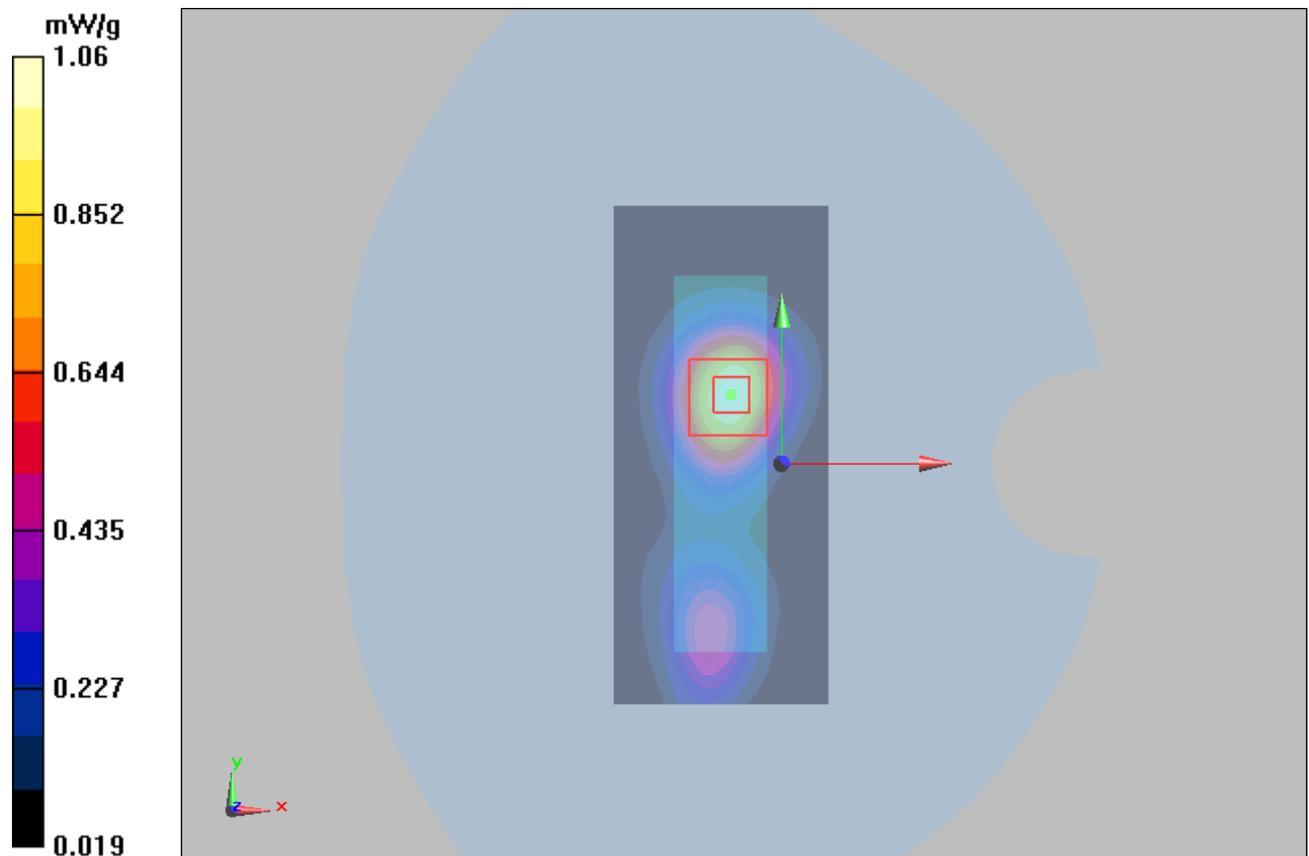


Figure 44 WCDMA Band IV +HSUPA with IBM T61 Test Position 2 Channel 1513

### WCDMA Band V with IBM T61 Test Position 1 Middle Frequency

Date/Time: 4/23/2010 10:24:59 PM

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Middle/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.573 mW/g

**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.7 V/m; Power Drift = -0.089 dB

Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.508 mW/g; SAR(10 g) = 0.287 mW/g**

Maximum value of SAR (measured) = 0.558 mW/g

**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.7 V/m; Power Drift = -0.089 dB

Peak SAR (extrapolated) = 0.591 W/kg

**SAR(1 g) = 0.390 mW/g; SAR(10 g) = 0.258 mW/g**

Maximum value of SAR (measured) = 0.422 mW/g

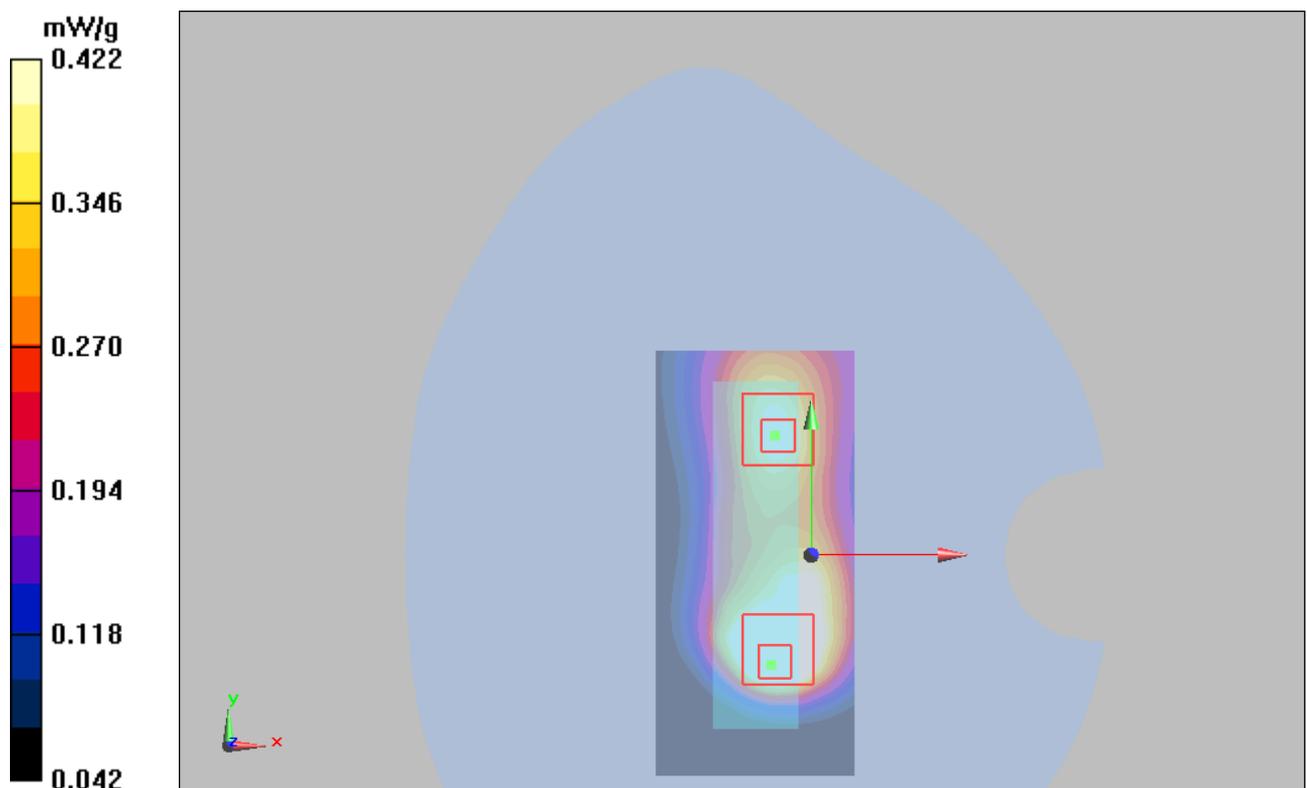


Figure 45 WCDMA Band V with IBM T61 Test Position 1 Channel 4183

**WCDMA Band V with IBM T61 Test Position 2 Middle Frequency**

Date/Time: 4/23/2010 7:06:38 PM

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 2 Middle/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.609 mW/g

**Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.6 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.887 W/kg

**SAR(1 g) = 0.568 mW/g; SAR(10 g) = 0.345 mW/g**

Maximum value of SAR (measured) = 0.625 mW/g

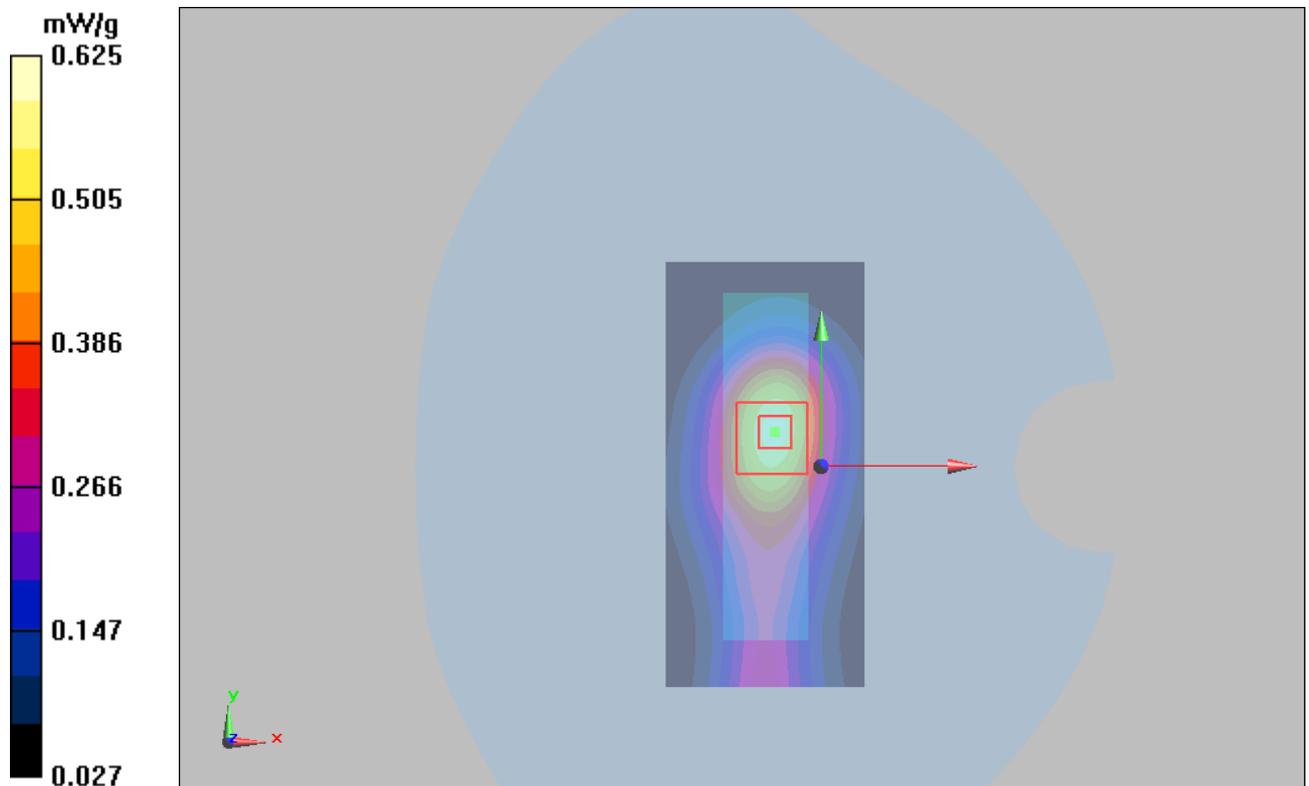


Figure 46 WCDMA Band V with IBM T61 Test Position 2 Channel 4183

### WCDMA Band V with IBM T61 Test Position 3 Middle Frequency

Date/Time: 4/23/2010 10:49:00 PM

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 3 Middle/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.316 mW/g

**Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.7 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 2.21 W/kg

**SAR(1 g) = 0.368 mW/g; SAR(10 g) = 0.114 mW/g**

Maximum value of SAR (measured) = 0.386 mW/g

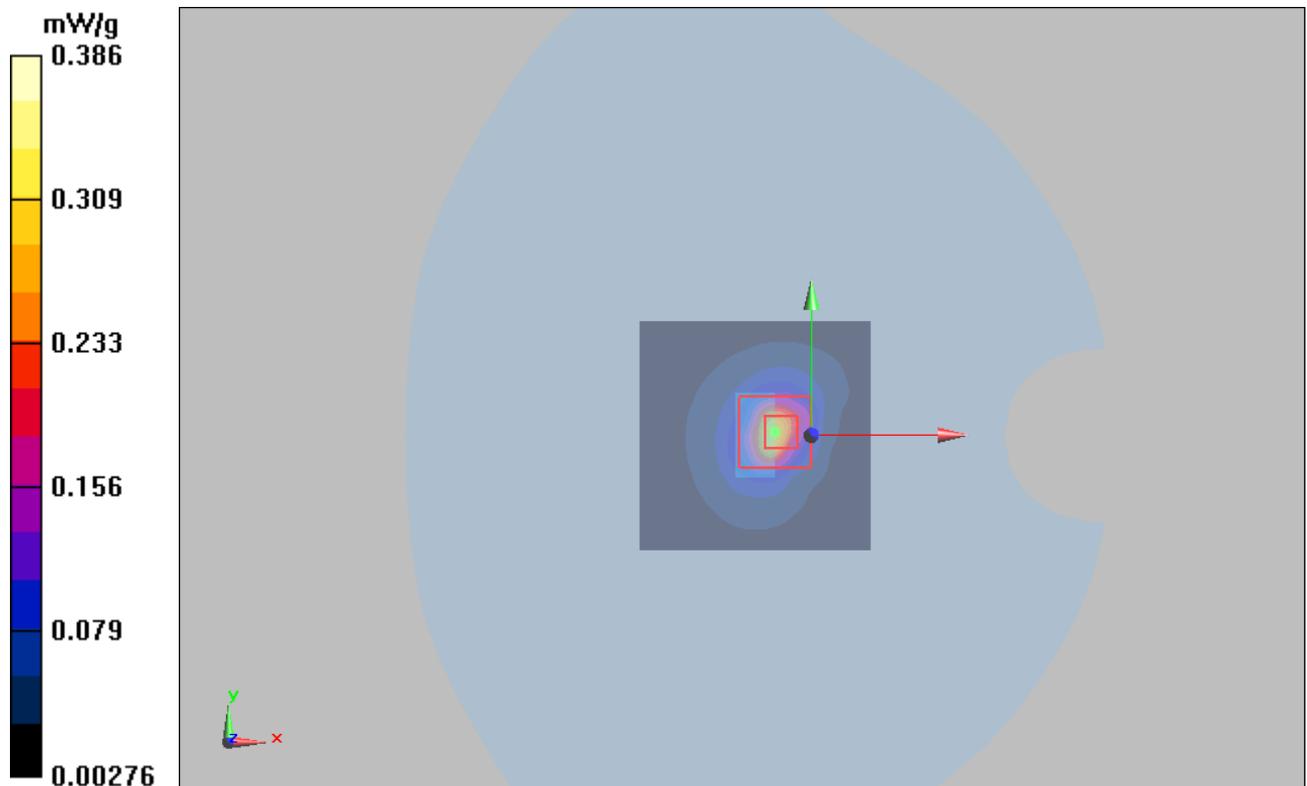


Figure 47 WCDMA Band V with IBM T61 Test Position 3 Channel 4183

### WCDMA Band V with Lenovo Y450 Test Position 4 Middle Frequency

Date/Time: 4/23/2010 9:53:33 PM

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 4 Middle/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.517 mW/g

**Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.7 V/m; Power Drift = 0.070 dB

Peak SAR (extrapolated) = 0.743 W/kg

**SAR(1 g) = 0.469 mW/g; SAR(10 g) = 0.282 mW/g**

Maximum value of SAR (measured) = 0.517 mW/g

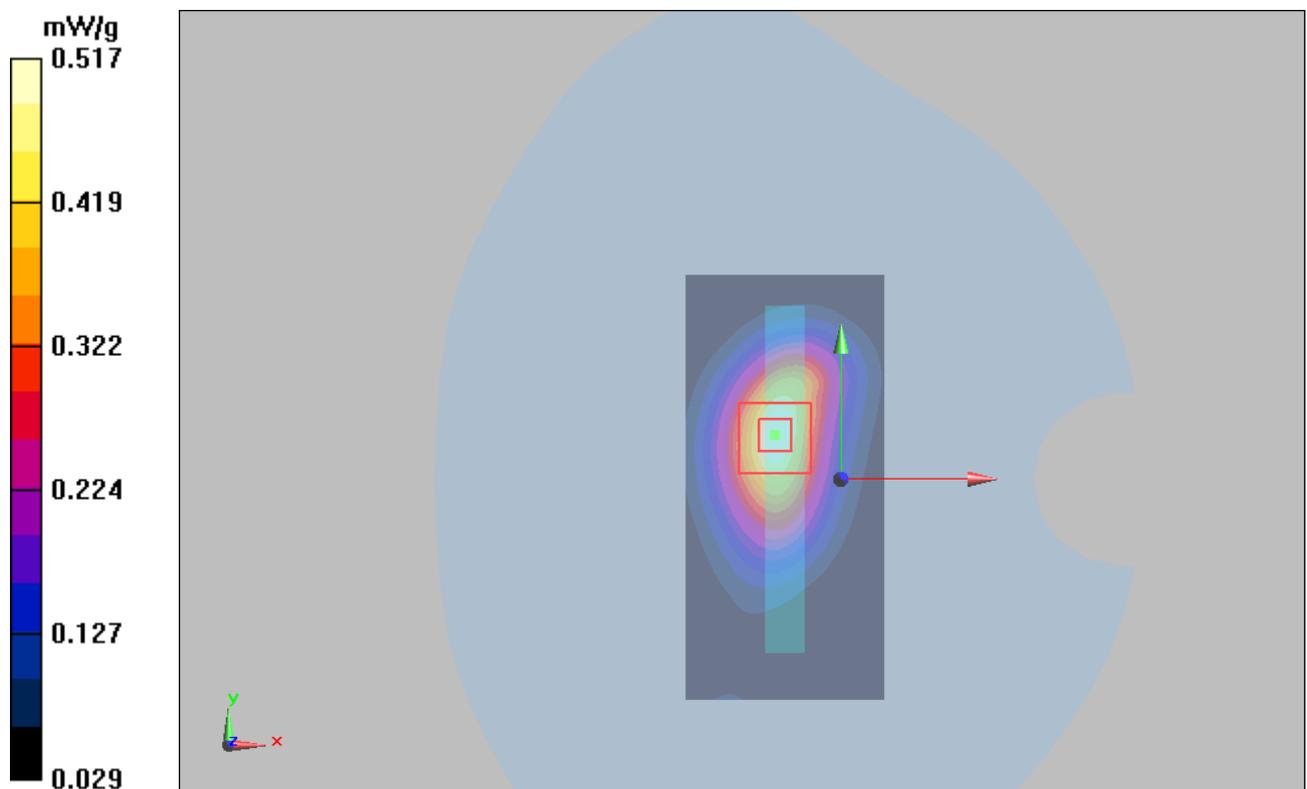


Figure 48 WCDMA Band V with Lenovo Y450 Test Position 4 Channel 4183

### WCDMA Band V with Lenovo Y450 Test Position 5 High Frequency

Date/Time: 4/24/2010 9:27:08 AM

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 847$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 53.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 5 High/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.638 mW/g

**Test Position 5 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24 V/m; Power Drift = -0.135 dB

Peak SAR (extrapolated) = 1.59 W/kg

**SAR(1 g) = 0.594 mW/g; SAR(10 g) = 0.278 mW/g**

Maximum value of SAR (measured) = 0.675 mW/g

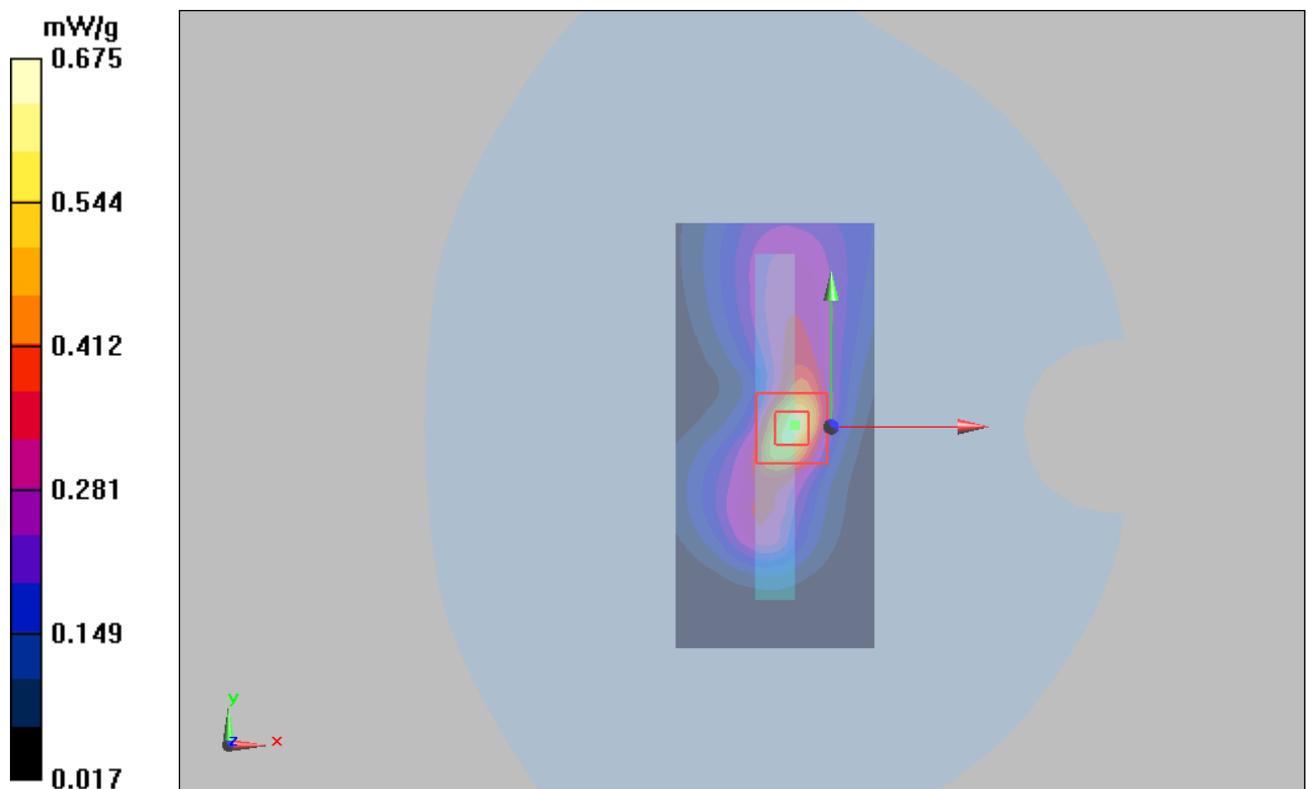


Figure 49 WCDMA Band V with Lenovo Y450 Test Position 5 Channel 4233

### WCDMA Band V with Lenovo Y450 Test Position 5 Middle Frequency

Date/Time: 4/24/2010 9:10:33 AM

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 5 Middle/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.645 mW/g


**Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.2 V/m; Power Drift = -0.095 dB

Peak SAR (extrapolated) = 1.52 W/kg

**SAR(1 g) = 0.596 mW/g; SAR(10 g) = 0.289 mW/g**

Maximum value of SAR (measured) = 0.674 mW/g

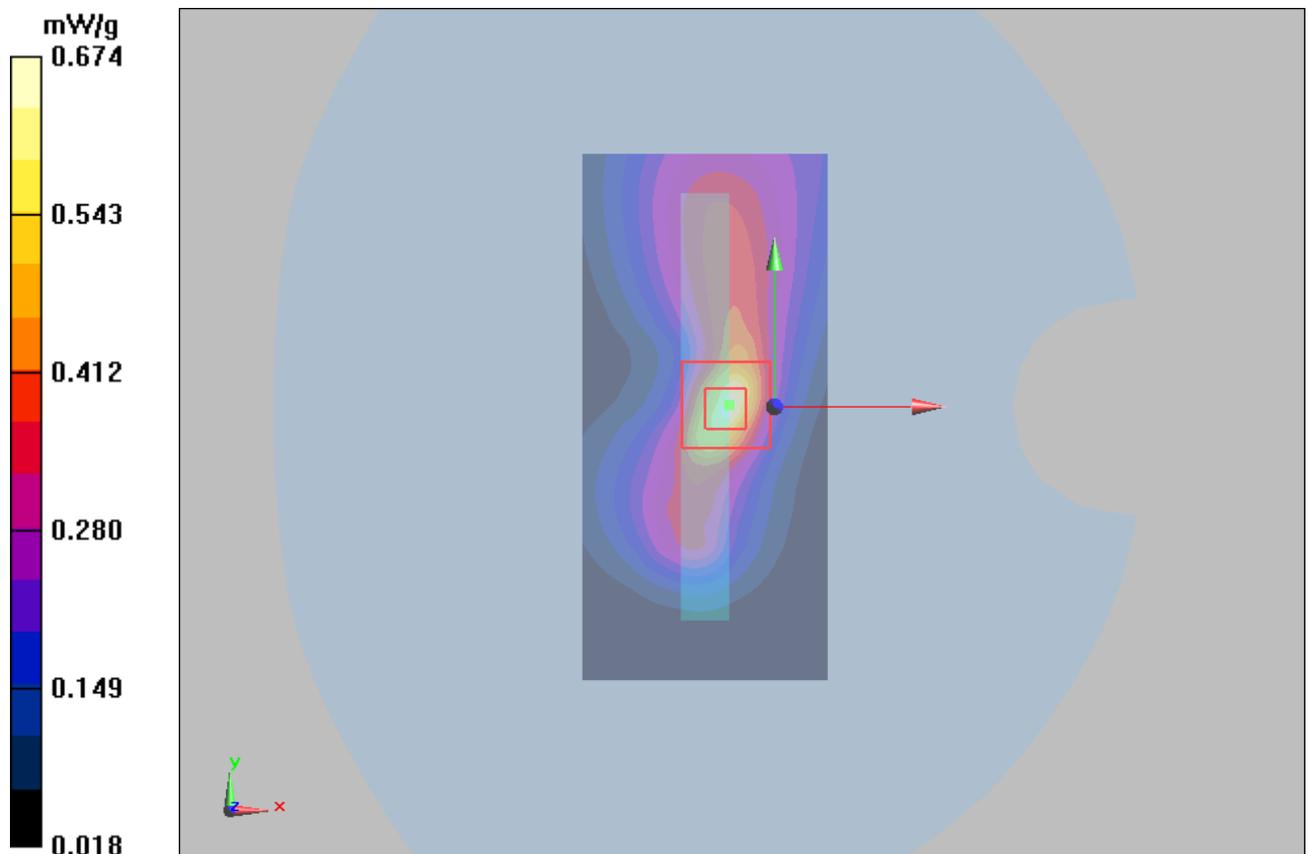

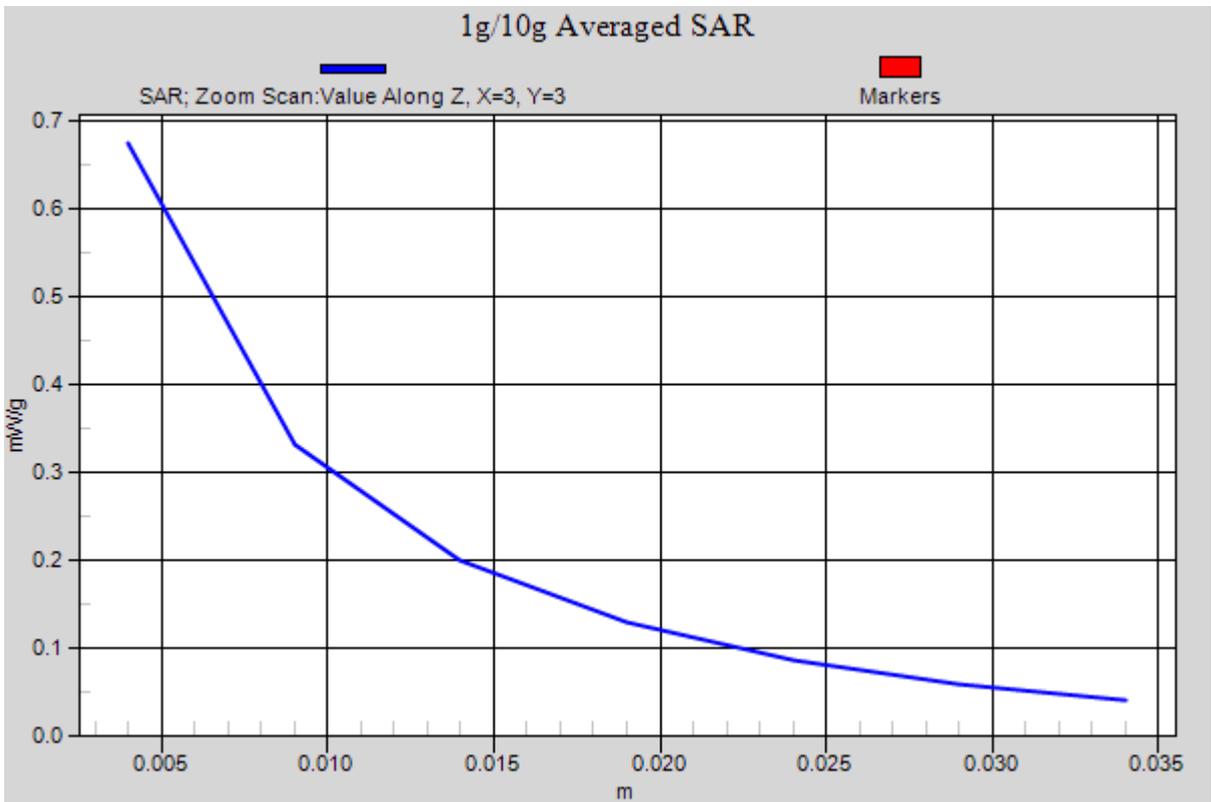


Figure 50 WCDMA Band V with Lenovo Y450 Test Position 5 Channel 4183

### WCDMA Band V with Lenovo Y450 Test Position 5 Low Frequency

Date/Time: 4/24/2010 10:20:45 AM

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.984$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 5 Low/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.581 mW/g

**Test Position 5 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.4 V/m; Power Drift = -0.114 dB

Peak SAR (extrapolated) = 1.31 W/kg

**SAR(1 g) = 0.538 mW/g; SAR(10 g) = 0.270 mW/g**

Maximum value of SAR (measured) = 0.607 mW/g

**Test Position 5 Low/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.4 V/m; Power Drift = -0.114 dB

Peak SAR (extrapolated) = 0.603 W/kg

**SAR(1 g) = 0.401 mW/g; SAR(10 g) = 0.277 mW/g**

Maximum value of SAR (measured) = 0.429 mW/g

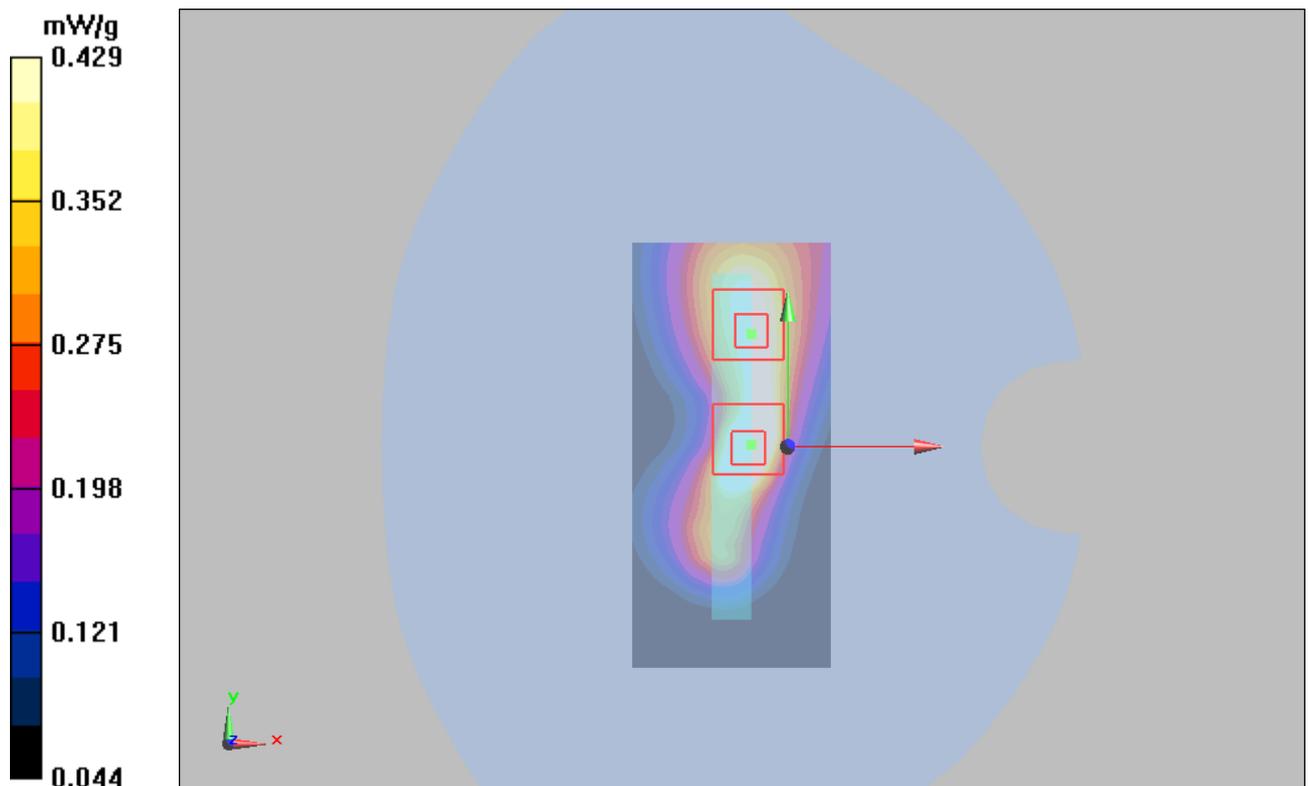


Figure 51 WCDMA Band V with Lenovo Y450 Test Position 5 Channel 4132

### WCDMA Band V +HSDPA with Lenovo Y450 Test Position 5 Middle Frequency

Date/Time: 4/24/2010 10:48:36 AM

Communication System: WCDMA Band V+HSDPA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 5 Middle/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.610 mW/g

**Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24 V/m; Power Drift = -0.151 dB

Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 0.581 mW/g; SAR(10 g) = 0.284 mW/g**

Maximum value of SAR (measured) = 0.664 mW/g

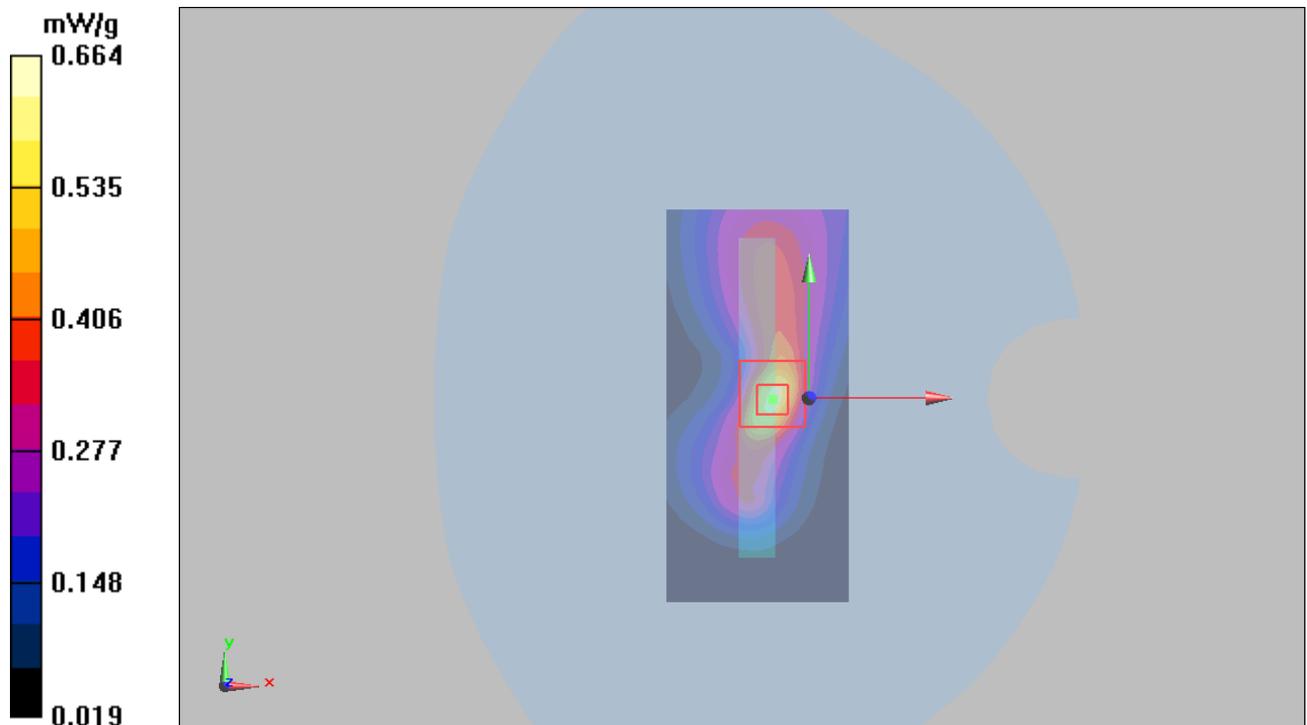


Figure 52 WCDMA Band V +HSDPA with IBM T61 Test Position 5 Channel 4183

**WCDMA Band V +HSUPA with Lenovo Y450 Test Position 5 Middle Frequency**

Date/Time: 4/24/2010 11:21:08 AM

Communication System: WCDMA Band V+HSUPA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 5 Middle/Area Scan (61x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.452 mW/g

**Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.8 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.422 mW/g; SAR(10 g) = 0.207 mW/g**

Maximum value of SAR (measured) = 0.475 mW/g

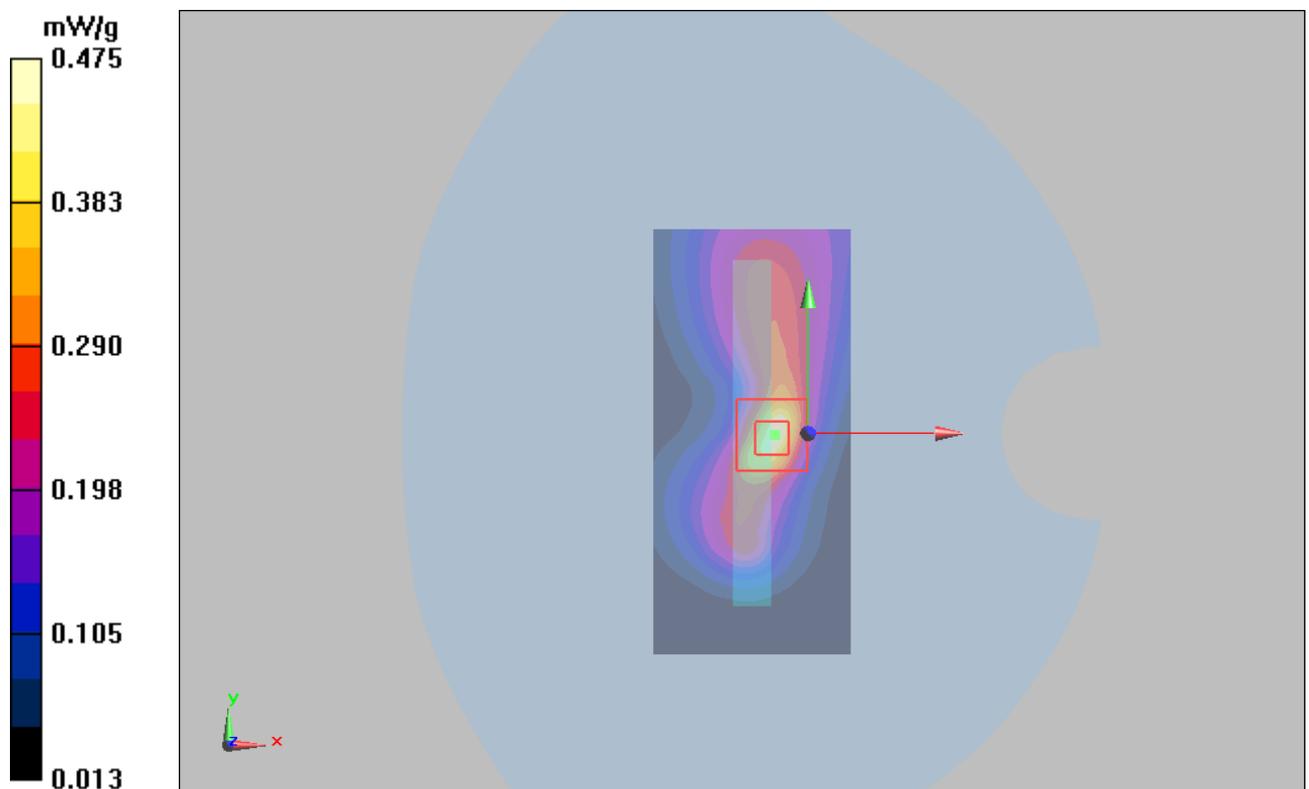


Figure 53 WCDMA Band V +HSUPA with IBM T61 Test Position 5 Channel 4183

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0605

Page 102of 145

## ANNEX D: Probe Calibration Certificate

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TA (Auden)**

Certificate No: **EX3-3677\_Sep09**

| CALIBRATION CERTIFICATE  |   |                                   |                            |                   |      |                            |                       |                    |            |                          |        |                     |            |                          |        |                     |            |                          |        |                           |                |                           |        |                            |                 |                           |        |                            |                 |                           |        |                        |          |                               |        |      |         |                               |        |                     |      |                       |                 |                       |              |                                  |                        |                           |            |                                   |                        |
|--|---|-----------------------------------|----------------------------|-------------------|------|----------------------------|-----------------------|--------------------|------------|--------------------------|--------|---------------------|------------|--------------------------|--------|---------------------|------------|--------------------------|--------|---------------------------|----------------|---------------------------|--------|----------------------------|-----------------|---------------------------|--------|----------------------------|-----------------|---------------------------|--------|------------------------|----------|-------------------------------|--------|------|---------|-------------------------------|--------|---------------------|------|-----------------------|-----------------|-----------------------|--------------|----------------------------------|------------------------|---------------------------|------------|-----------------------------------|------------------------|
| Object   | EX3DV4 - SN:3677  |                                   |                            |                   |      |                            |                       |                    |            |                          |        |                     |            |                          |        |                     |            |                          |        |                           |                |                           |        |                            |                 |                           |        |                            |                 |                           |        |                        |          |                               |        |      |         |                               |        |                     |      |                       |                 |                       |              |                                  |                        |                           |            |                                   |                        |
| Calibration procedure(s)   | QA CAL-01.v6, QA CAL-12.v5, QA CAL-23.v3 and QA CAL-25.v2 - Calibration procedure for dosimetric E-field probes |                                   |                            |                   |      |                            |                       |                    |            |                          |        |                     |            |                          |        |                     |            |                          |        |                           |                |                           |        |                            |                 |                           |        |                            |                 |                           |        |                        |          |                               |        |      |         |                               |        |                     |      |                       |                 |                       |              |                                  |                        |                           |            |                                   |                        |
| Calibration date:  | September 23, 2009  |                                   |                            |                   |      |                            |                       |                    |            |                          |        |                     |            |                          |        |                     |            |                          |        |                           |                |                           |        |                            |                 |                           |        |                            |                 |                           |        |                        |          |                               |        |      |         |                               |        |                     |      |                       |                 |                       |              |                                  |                        |                           |            |                                   |                        |
| Condition of the calibrated item   | In Tolerance  |                                   |                            |                   |      |                            |                       |                    |            |                          |        |                     |            |                          |        |                     |            |                          |        |                           |                |                           |        |                            |                 |                           |        |                            |                 |                           |        |                        |          |                               |        |      |         |                               |        |                     |      |                       |                 |                       |              |                                  |                        |                           |            |                                   |                        |
| <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity &lt; 70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter E4419B</td> <td>GB41293874</td> <td>1-Apr-09 (No. 217-01030)</td> <td>Apr-10</td> </tr> <tr> <td>Power sensor E4412A</td> <td>MY41495277</td> <td>1-Apr-09 (No. 217-01030)</td> <td>Apr-10</td> </tr> <tr> <td>Power sensor E4412A</td> <td>MY41498087</td> <td>1-Apr-09 (No. 217-01030)</td> <td>Apr-10</td> </tr> <tr> <td>Reference 3 dB Attenuator</td> <td>SN: S5054 (3c)</td> <td>31-Mar-09 (No. 217-01026)</td> <td>Mar-10</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: S5086 (20b)</td> <td>31-Mar-09 (No. 217-01028)</td> <td>Mar-10</td> </tr> <tr> <td>Reference 30 dB Attenuator</td> <td>SN: S5129 (30b)</td> <td>31-Mar-09 (No. 217-01027)</td> <td>Mar-10</td> </tr> <tr> <td>Reference Probe ES3DV2</td> <td>SN: 3013</td> <td>2-Jan-09 (No. ES3-3013_Jan09)</td> <td>Jan-10</td> </tr> <tr> <td>DAE4</td> <td>SN: 660</td> <td>9-Sep-08 (No. DAE4-660_Sep08)</td> <td>Sep-09</td> </tr> </tbody> </table><br><table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>RF generator HP 8648C</td> <td>US3642U01700</td> <td>4-Aug-99 (in house check Oct-07)</td> <td>In house check: Oct-09</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585</td> <td>18-Oct-01 (in house check Oct-08)</td> <td>In house check: Oct-09</td> </tr> </tbody> </table> |   |                                   |                            | Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration | Power meter E4419B | GB41293874 | 1-Apr-09 (No. 217-01030) | Apr-10 | Power sensor E4412A | MY41495277 | 1-Apr-09 (No. 217-01030) | Apr-10 | Power sensor E4412A | MY41498087 | 1-Apr-09 (No. 217-01030) | Apr-10 | Reference 3 dB Attenuator | SN: S5054 (3c) | 31-Mar-09 (No. 217-01026) | Mar-10 | Reference 20 dB Attenuator | SN: S5086 (20b) | 31-Mar-09 (No. 217-01028) | Mar-10 | Reference 30 dB Attenuator | SN: S5129 (30b) | 31-Mar-09 (No. 217-01027) | Mar-10 | Reference Probe ES3DV2 | SN: 3013 | 2-Jan-09 (No. ES3-3013_Jan09) | Jan-10 | DAE4 | SN: 660 | 9-Sep-08 (No. DAE4-660_Sep08) | Sep-09 | Secondary Standards | ID # | Check Date (in house) | Scheduled Check | RF generator HP 8648C | US3642U01700 | 4-Aug-99 (in house check Oct-07) | In house check: Oct-09 | Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-08) | In house check: Oct-09 |
| Primary Standards  | ID #  | Cal Date (Certificate No.)        | Scheduled Calibration      |                   |      |                            |                       |                    |            |                          |        |                     |            |                          |        |                     |            |                          |        |                           |                |                           |        |                            |                 |                           |        |                            |                 |                           |        |                        |          |                               |        |      |         |                               |        |                     |      |                       |                 |                       |              |                                  |                        |                           |            |                                   |                        |
| Power meter E4419B   | GB41293874  | 1-Apr-09 (No. 217-01030)          | Apr-10                     |                   |      |                            |                       |                    |            |                          |        |                     |            |                          |        |                     |            |                          |        |                           |                |                           |        |                            |                 |                           |        |                            |                 |                           |        |                        |          |                               |        |      |         |                               |        |                     |      |                       |                 |                       |              |                                  |                        |                           |            |                                   |                        |
| Power sensor E4412A  | MY41495277  | 1-Apr-09 (No. 217-01030)          | Apr-10                     |                   |      |                            |                       |                    |            |                          |        |                     |            |                          |        |                     |            |                          |        |                           |                |                           |        |                            |                 |                           |        |                            |                 |                           |        |                        |          |                               |        |      |         |                               |        |                     |      |                       |                 |                       |              |                                  |                        |                           |            |                                   |                        |
| Power sensor E4412A  | MY41498087  | 1-Apr-09 (No. 217-01030)          | Apr-10                     |                   |      |                            |                       |                    |            |                          |        |                     |            |                          |        |                     |            |                          |        |                           |                |                           |        |                            |                 |                           |        |                            |                 |                           |        |                        |          |                               |        |      |         |                               |        |                     |      |                       |                 |                       |              |                                  |                        |                           |            |                                   |                        |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 31-Mar-09 (No. 217-01026)         | Mar-10                     |                   |      |                            |                       |                    |            |                          |        |                     |            |                          |        |                     |            |                          |        |                           |                |                           |        |                            |                 |                           |        |                            |                 |                           |        |                        |          |                               |        |      |         |                               |        |                     |      |                       |                 |                       |              |                                  |                        |                           |            |                                   |                        |
| Reference 20 dB Attenuator   | SN: S5086 (20b)   | 31-Mar-09 (No. 217-01028)         | Mar-10                     |                   |      |                            |                       |                    |            |                          |        |                     |            |                          |        |                     |            |                          |        |                           |                |                           |        |                            |                 |                           |        |                            |                 |                           |        |                        |          |                               |        |      |         |                               |        |                     |      |                       |                 |                       |              |                                  |                        |                           |            |                                   |                        |
| Reference 30 dB Attenuator   | SN: S5129 (30b)   | 31-Mar-09 (No. 217-01027)         | Mar-10                     |                   |      |                            |                       |                    |            |                          |        |                     |            |                          |        |                     |            |                          |        |                           |                |                           |        |                            |                 |                           |        |                            |                 |                           |        |                        |          |                               |        |      |         |                               |        |                     |      |                       |                 |                       |              |                                  |                        |                           |            |                                   |                        |
| Reference Probe ES3DV2   | SN: 3013  | 2-Jan-09 (No. ES3-3013_Jan09)     | Jan-10                     |                   |      |                            |                       |                    |            |                          |        |                     |            |                          |        |                     |            |                          |        |                           |                |                           |        |                            |                 |                           |        |                            |                 |                           |        |                        |          |                               |        |      |         |                               |        |                     |      |                       |                 |                       |              |                                  |                        |                           |            |                                   |                        |
| DAE4   | SN: 660   | 9-Sep-08 (No. DAE4-660_Sep08)     | Sep-09                     |                   |      |                            |                       |                    |            |                          |        |                     |            |                          |        |                     |            |                          |        |                           |                |                           |        |                            |                 |                           |        |                            |                 |                           |        |                        |          |                               |        |      |         |                               |        |                     |      |                       |                 |                       |              |                                  |                        |                           |            |                                   |                        |
| Secondary Standards  | ID #  | Check Date (in house)             | Scheduled Check            |                   |      |                            |                       |                    |            |                          |        |                     |            |                          |        |                     |            |                          |        |                           |                |                           |        |                            |                 |                           |        |                            |                 |                           |        |                        |          |                               |        |      |         |                               |        |                     |      |                       |                 |                       |              |                                  |                        |                           |            |                                   |                        |
| RF generator HP 8648C  | US3642U01700  | 4-Aug-99 (in house check Oct-07)  | In house check: Oct-09     |                   |      |                            |                       |                    |            |                          |        |                     |            |                          |        |                     |            |                          |        |                           |                |                           |        |                            |                 |                           |        |                            |                 |                           |        |                        |          |                               |        |      |         |                               |        |                     |      |                       |                 |                       |              |                                  |                        |                           |            |                                   |                        |
| Network Analyzer HP 8753E  | US37390585  | 18-Oct-01 (in house check Oct-08) | In house check: Oct-09     |                   |      |                            |                       |                    |            |                          |        |                     |            |                          |        |                     |            |                          |        |                           |                |                           |        |                            |                 |                           |        |                            |                 |                           |        |                        |          |                               |        |      |         |                               |        |                     |      |                       |                 |                       |              |                                  |                        |                           |            |                                   |                        |
| Calibrated by:   | Name<br>Claudio Leubler   | Function<br>Laboratory Technician | Signature<br>              |                   |      |                            |                       |                    |            |                          |        |                     |            |                          |        |                     |            |                          |        |                           |                |                           |        |                            |                 |                           |        |                            |                 |                           |        |                        |          |                               |        |      |         |                               |        |                     |      |                       |                 |                       |              |                                  |                        |                           |            |                                   |                        |
| Approved by:   | Name<br>Katja Pokovic   | Function<br>Technical Manager     | Signature<br>              |                   |      |                            |                       |                    |            |                          |        |                     |            |                          |        |                     |            |                          |        |                           |                |                           |        |                            |                 |                           |        |                            |                 |                           |        |                        |          |                               |        |      |         |                               |        |                     |      |                       |                 |                       |              |                                  |                        |                           |            |                                   |                        |
|  |   |                                   | Issued: September 23, 2009 |                   |      |                            |                       |                    |            |                          |        |                     |            |                          |        |                     |            |                          |        |                           |                |                           |        |                            |                 |                           |        |                            |                 |                           |        |                        |          |                               |        |      |         |                               |        |                     |      |                       |                 |                       |              |                                  |                        |                           |            |                                   |                        |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.  |   |                                   |                            |                   |      |                            |                       |                    |            |                          |        |                     |            |                          |        |                     |            |                          |        |                           |                |                           |        |                            |                 |                           |        |                            |                 |                           |        |                        |          |                               |        |      |         |                               |        |                     |      |                       |                 |                       |              |                                  |                        |                           |            |                                   |                        |

Certificate No: EX3-3677\_Sep09

Page 1 of 9

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0605

Page 103of 145

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

|                          |  |
|--------------------------|--|
| TSL                      | tissue simulating liquid   |
| NORM <sub>x,y,z</sub>    | sensitivity in free space  |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>   |
| DCP                      | diode compression point  |
| Polarization $\varphi$   | $\varphi$ rotation around probe axis   |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

EX3DV4 SN:3677

September 23, 2009

# Probe EX3DV4

## SN:3677

|                  |                    |
|------------------|--------------------|
| Manufactured:    | September 9, 2008  |
| Last calibrated: | November 7, 2008   |
| Recalibrated:    | September 23, 2009 |

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)




EX3DV4 SN:3677

September 23, 2009

### Frequency Response of E-Field

(TEM-Cell: ifi110 EXX, Waveguide: R22)


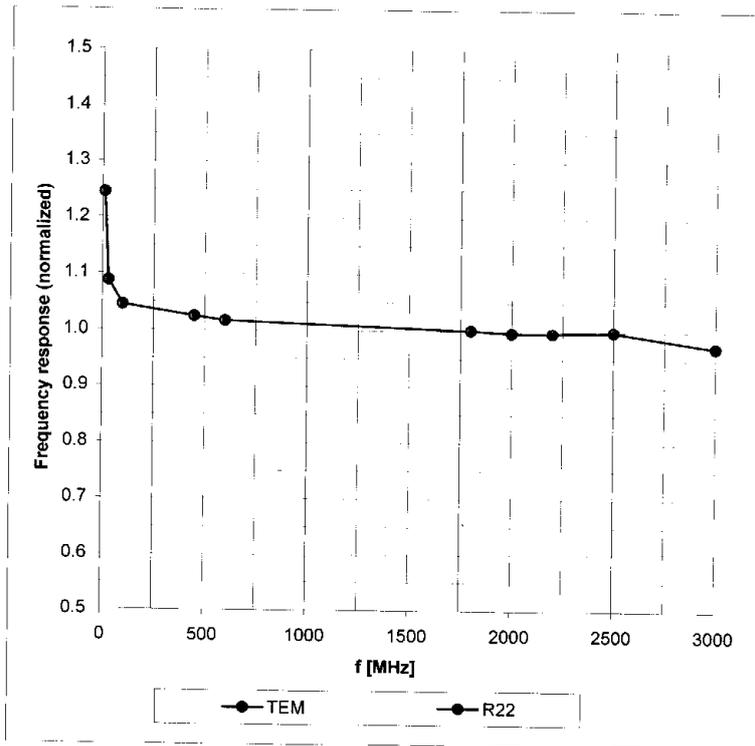


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

EX3DV4 SN:3677

September 23, 2009

Receiving Pattern ( $\phi$ ),  $\vartheta = 0^\circ$

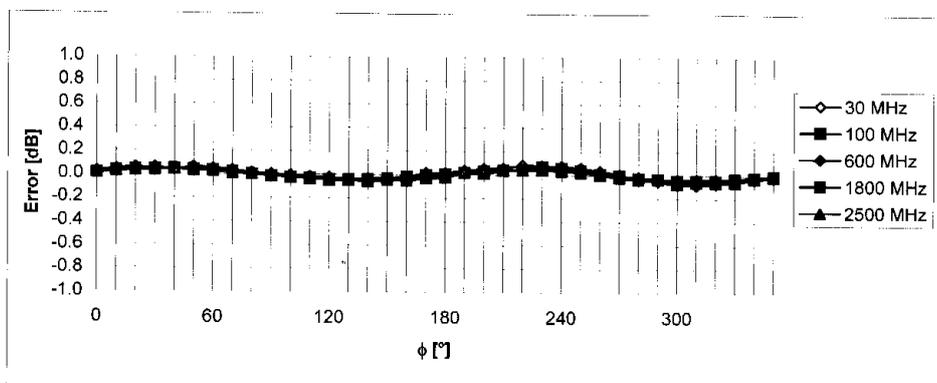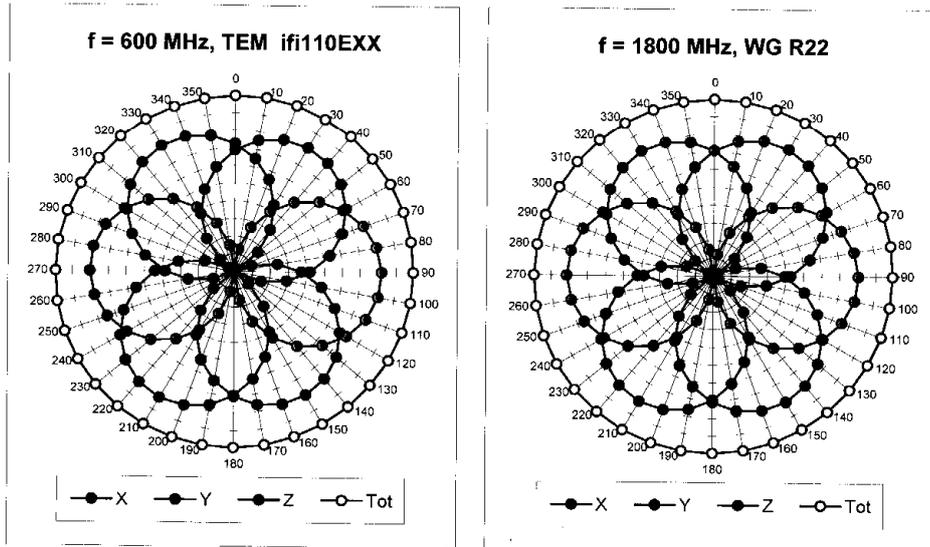


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

EX3DV4 SN:3677

September 23, 2009

**Dynamic Range  $f(SAR_{head})$**   
(Waveguide R22,  $f = 1800$  MHz)

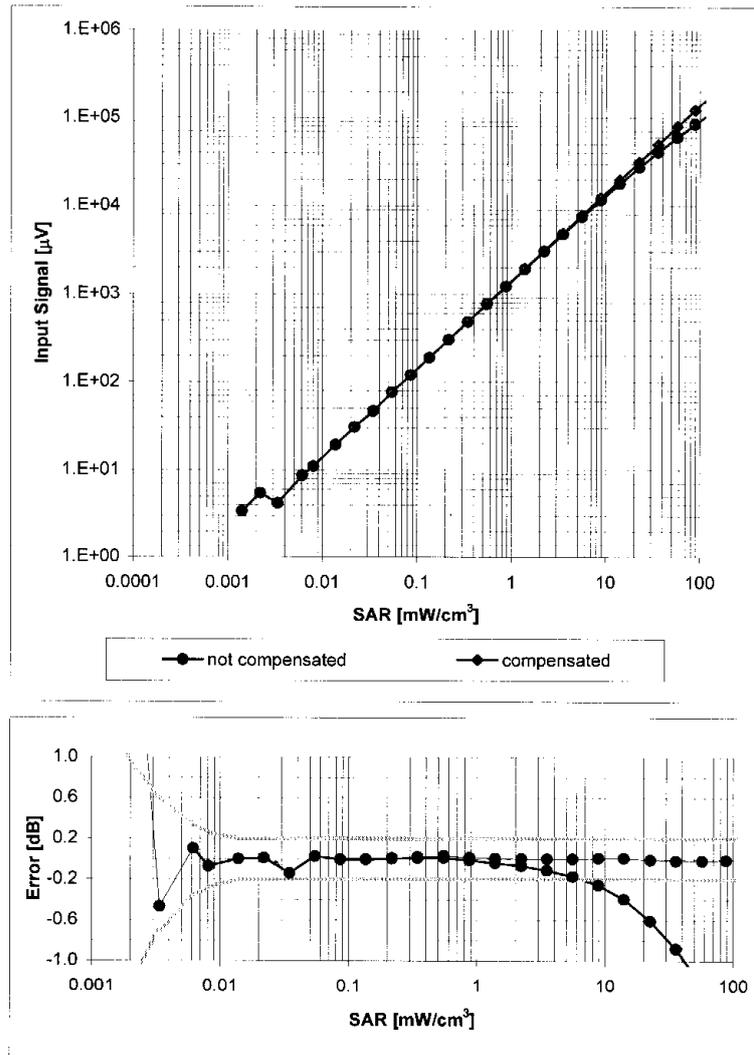


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

EX3DV4 SN:3677

September 23, 2009

### Conversion Factor Assessment

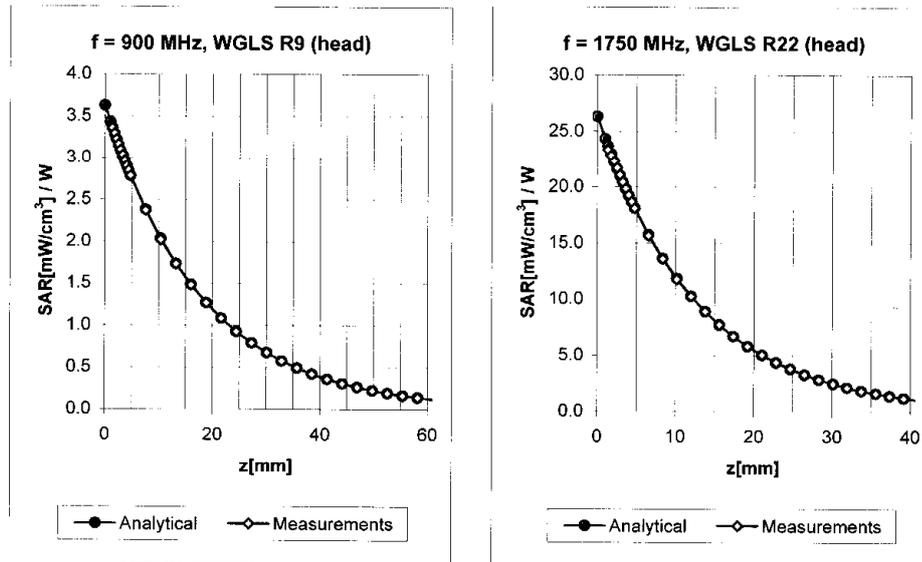

| f [MHz] | Validity [MHz] <sup>c</sup> | TSL  | Permittivity | Conductivity | Alpha | Depth | ConvF Uncertainty   |
|---------|-----------------------------|------|--------------|--------------|-------|-------|---------------------|
| 835     | ± 50 / ± 100                | Head | 41.5 ± 5%    | 0.90 ± 5%    | 0.68  | 0.64  | 9.20 ± 11.0% (k=2)  |
| 900     | ± 50 / ± 100                | Head | 41.5 ± 5%    | 0.97 ± 5%    | 0.71  | 0.62  | 8.91 ± 11.0% (k=2)  |
| 1750    | ± 50 / ± 100                | Head | 40.1 ± 5%    | 1.37 ± 5%    | 0.68  | 0.62  | 8.04 ± 11.0% (k=2)  |
| 1950    | ± 50 / ± 100                | Head | 40.0 ± 5%    | 1.40 ± 5%    | 0.70  | 0.60  | 7.53 ± 11.0% (k=2)  |
| 450     | ± 50 / ± 100                | Body | 56.7 ± 5%    | 0.94 ± 5%    | 0.32  | 0.49  | 10.43 ± 13.3% (k=2) |
| 835     | ± 50 / ± 100                | Body | 55.2 ± 5%    | 0.97 ± 5%    | 0.54  | 0.73  | 9.11 ± 11.0% (k=2)  |
| 900     | ± 50 / ± 100                | Body | 55.0 ± 5%    | 1.05 ± 5%    | 0.63  | 0.71  | 8.89 ± 11.0% (k=2)  |
| 1750    | ± 50 / ± 100                | Body | 53.4 ± 5%    | 1.49 ± 5%    | 0.55  | 0.74  | 7.70 ± 11.0% (k=2)  |
| 1950    | ± 50 / ± 100                | Body | 53.3 ± 5%    | 1.52 ± 5%    | 0.30  | 1.01  | 7.62 ± 11.0% (k=2)  |
| 2450    | ± 50 / ± 100                | Body | 52.7 ± 5%    | 1.95 ± 5%    | 0.56  | 0.68  | 7.28 ± 11.0% (k=2)  |


<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

EX3DV4 SN:3677

September 23, 2009

### Deviation from Isotropy in HSL

Error ( $\phi$ ,  $\vartheta$ ),  $f = 900$  MHz

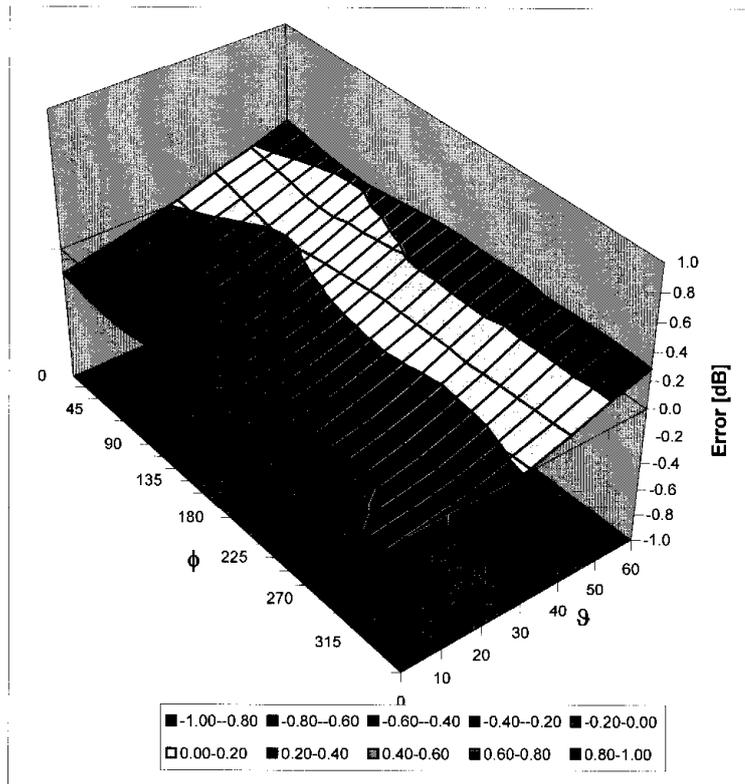

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0605

Page 111 of 145

## ANNEX E: D835V2 Dipole Calibration Certificate

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **ATL (Auden)**

Certificate No: **D835V2-4d082\_Jul09**

### CALIBRATION CERTIFICATE

Object: **D835V2 - SN: 4d082**

Calibration procedure(s): **QA CAL-05.v7  
Calibration procedure for dipole validation kits**

Calibration date: **July 13, 2009**

Condition of the calibrated item: **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 08-Oct-08 (No. 217-00898)         | Oct-09                 |
| Power sensor HP 8481A       | US37292783         | 08-Oct-08 (No. 217-00898)         | Oct-09                 |
| Reference 20 dB Attenuator  | SN: 5086 (20g)     | 31-Mar-09 (No. 217-01025)         | Mar-10                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 31-Mar-09 (No. 217-01029)         | Mar-10                 |
| Reference Probe ES3DV2      | SN: 3025           | 30-Apr-09 (No. ES3-3025_Apr09)    | Apr-10                 |
| DAE4                        | SN: 601            | 07-Mar-09 (No. DAE4-601_Mar09)    | Mar-10                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power sensor HP 8481A       | MY41092317         | 18-Oct-02 (in house check Oct-07) | In house check: Oct-09 |
| RF generator R&S SMT-06     | 100005             | 4-Aug-99 (in house check Oct-07)  | In house check: Oct-09 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-08) | In house check: Oct-09 |

Calibrated by: **Jeton Kastrati** (Name), **Laboratory Technician** (Function), *[Signature]* (Signature)

Approved by: **Katja Pokovic** (Name), **Technical Manager** (Function), *[Signature]* (Signature)

Issued: July 13, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0605

Page 112 of 145

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL tissue simulating liquid  
ConvF sensitivity in TSL / NORM x,y,z  
N/A not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

# TA Technology (Shanghai) Co., Ltd. Test Report

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |                           |             |
|-------------------------------------|---------------------------|-------------|
| <b>DASY Version</b>                 | DASY5                     | V5.0        |
| <b>Extrapolation</b>                | Advanced Extrapolation    |             |
| <b>Phantom</b>                      | Modular Flat Phantom V4.9 |             |
| <b>Distance Dipole Center - TSL</b> | 15 mm                     | with Spacer |
| <b>Zoom Scan Resolution</b>         | dx, dy, dz = 5 mm         |             |
| <b>Frequency</b>                    | 835 MHz ± 1 MHz           |             |

### Head TSL parameters

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| <b>Nominal Head TSL parameters</b>      | 22.0 °C         | 41.5         | 0.90 mho/m       |
| <b>Measured Head TSL parameters</b>     | (22.0 ± 0.2) °C | 40.4 ± 6 %   | 0.89 mho/m ± 6 % |
| <b>Head TSL temperature during test</b> | (22.2 ± 0.2) °C | ----         | ----             |

### SAR result with Head TSL

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                  |
|---|--------------------|----------------------------------|
| SAR measured  | 250 mW input power | 2.42 mW / g                      |
| SAR normalized  | normalized to 1W   | 9.68 mW / g                      |
| SAR for nominal Head TSL parameters <sup>1</sup>      | normalized to 1W   | <b>9.71 mW /g ± 17.0 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                  |
|---|--------------------|----------------------------------|
| SAR measured  | 250 mW input power | 1.58 mW / g                      |
| SAR normalized  | normalized to 1W   | 6.32 mW / g                      |
| SAR for nominal Head TSL parameters <sup>1</sup>        | normalized to 1W   | <b>6.34 mW /g ± 16.5 % (k=2)</b> |

<sup>1</sup> Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

# TA Technology (Shanghai) Co., Ltd. Test Report

### Body TSL parameters

The following parameters and calculations were applied.

|                                  | Temperature     | Permittivity | Conductivity     |
|----------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters      | 22.0 °C         | 55.2         | 0.97 mho/m       |
| Measured Body TSL parameters     | (22.0 ± 0.2) °C | 53.0 ± 6 %   | 0.99 mho/m ± 6 % |
| Body TSL temperature during test | (22.5 ± 0.2) °C | ---          | ---              |

### SAR result with Body TSL

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                                   |
|---|--------------------|-----------------------------------|
| SAR measured  | 250 mW input power | 2.56 mW / g                       |
| SAR normalized  | normalized to 1W   | 10.2 mW / g                       |
| SAR for nominal Body TSL parameters <sup>2</sup>      | normalized to 1W   | <b>10.0 mW / g ± 17.0 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                                   |
|---|--------------------|-----------------------------------|
| SAR measured  | 250 mW input power | 1.68 mW / g                       |
| SAR normalized  | normalized to 1W   | 6.72 mW / g                       |
| SAR for nominal Body TSL parameters <sup>2</sup>        | normalized to 1W   | <b>6.61 mW / g ± 16.5 % (k=2)</b> |

<sup>2</sup> Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

## Appendix

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 52.3 $\Omega$ - 2.5 j $\Omega$ |
| Return Loss                          | - 29.5 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 48.3 $\Omega$ - 4.3 j $\Omega$ |
| Return Loss                          | - 26.6 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.390 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                  |
|-----------------|------------------|
| Manufactured by | SPEAG            |
| Manufactured on | October 17, 2008 |

**DASY5 Validation Report for Head TSL**

Date/Time: 13.07.2009 11:31:45

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d082**

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL 900 MHz

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.89$  mho/m;  $\epsilon_r = 40.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(5.86, 5.86, 5.86); Calibrated: 30.04.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45


**Pin=250mW; dip=15mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.4 V/m; Power Drift = 0.00639 dB

Peak SAR (extrapolated) = 3.62 W/kg

**SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.58 mW/g**

Maximum value of SAR (measured) = 2.8 mW/g

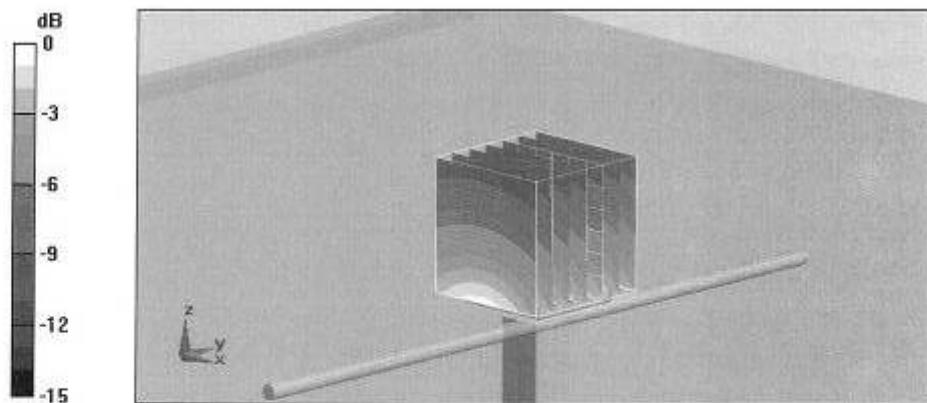


0 dB = 2.8mW/g

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0605

Page 117 of 145

## Impedance Measurement Plot for Head TSL

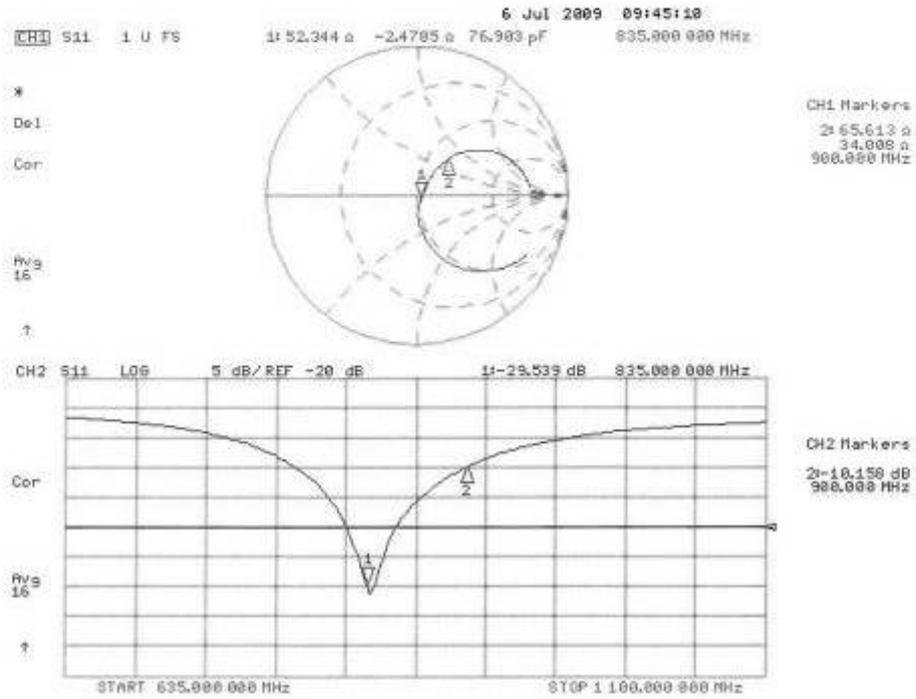

**DASY5 Validation Report for Body TSL**

Date/Time: 13.07.2009 11:50:13

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d082**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL900

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

**DASY5 Configuration:**

- Probe: ES3DV2 - SN3025; ConvF(5.79, 5.79, 5.79); Calibrated: 30.04.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45


**Pin = 250mW, d = 15mm/Zoom Scan (7x7x7)/Cube 0;** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.4 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 3.76 W/kg

**SAR(1 g) = 2.56 mW/g; SAR(10 g) = 1.68 mW/g**

Maximum value of SAR (measured) = 2.97 mW/g

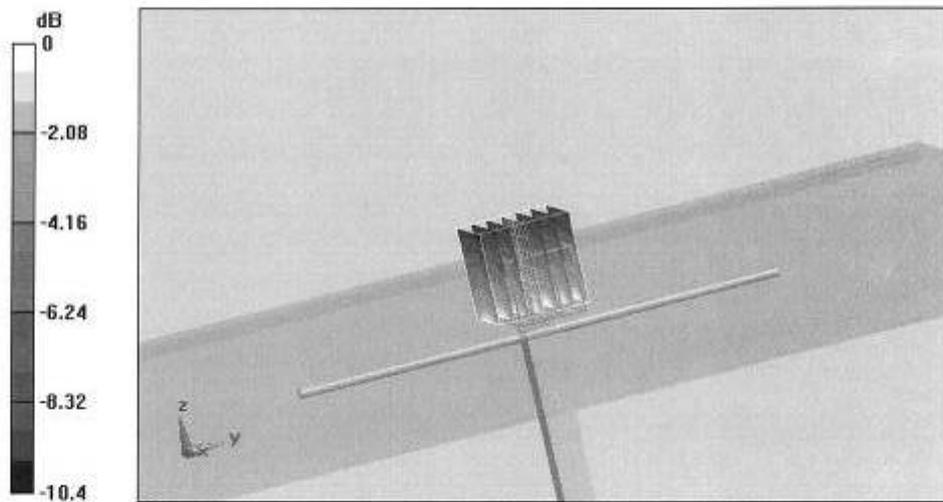


0 dB = 2.97mW/g

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0605

Page 119 of 145

## Impedance Measurement Plot for Body TSL

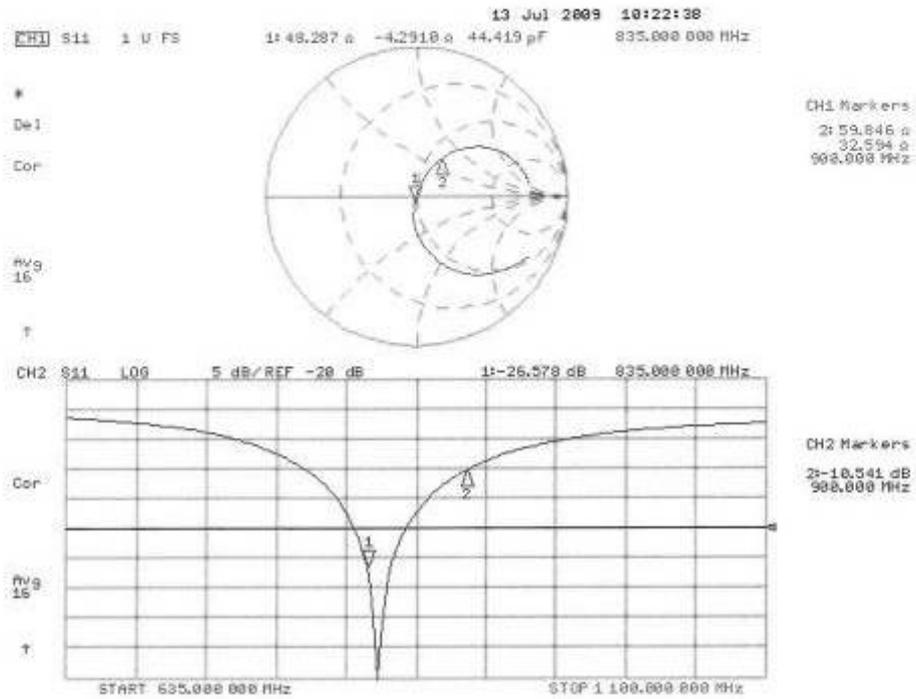

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0605

Page 120 of 145

## ANNEX F: D1800V2 Dipole Calibration Certificate

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Auden**

Certificate No: **D1800V2-2d052\_Jun09**

### CALIBRATION CERTIFICATE

Object: **D1800V2 - SN: 2d052**

Calibration procedure(s): **QA CAL-05.v7  
Calibration procedure for dipole validation kits**

Calibration date: **June 26, 2009**

Condition of the calibrated item: **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration  |
|-----------------------------|--------------------|---|------------------------|
| Power meter EPM-442A        | GB37480704         | 08-Oct-08 (No. 217-00898)                 | Oct-09                 |
| Power sensor HP 8481A       | US37292783         | 08-Oct-08 (No. 217-00898)                 | Oct-09                 |
| Reference 20 dB Attenuator  | SN: 5086 (20g)     | 31-Mar-09 (No. 217-01025)                 | Mar-10                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 31-Mar-09 (No. 217-01029)                 | Mar-10                 |
| Reference Probe ES3DV2      | SN: 3025           | 30-Apr-09 (No. ES3-3025_Apr09)            | Apr-10                 |
| DAE4                        | SN: 601            | 07-Mar-09 (No. DAE4-601_Mar09)            | Mar-10                 |
| Secondary Standards         | ID #               | Check Date (in house)                     | Scheduled Check        |
| Power sensor HP 8481A       | MY41092317         | 18-Oct-02 (in house check Oct-07)         | In house check: Oct-09 |
| RF generator R&S SMT-06     | 100005             | 4-Aug-99 (in house check Oct-07)          | In house check: Oct-09 |
| Network Analyzer HP 8753E   | US37390585 54205   | 18-Oct-01 (in house check Oct-08)         | In house check: Oct-09 |

Calibrated by: **Jeton Kastrab** (Name), **Laboratory Technician** (Function), *[Signature]* (Signature)

Approved by: **Katja Pokovic** (Name), **Technical Manager** (Function), *[Signature]* (Signature)

Issued: June 29, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL tissue simulating liquid  
ConvF sensitivity in TSL / NORM x,y,z  
N/A not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

# TA Technology (Shanghai) Co., Ltd. Test Report

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                           |             |
|------------------------------|---------------------------|-------------|
| DASY Version                 | DASY5                     | V5.0        |
| Extrapolation                | Advanced Extrapolation    |             |
| Phantom                      | Modular Flat Phantom V5.0 |             |
| Distance Dipole Center - TSL | 10 mm                     | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm         |             |
| Frequency                    | 1800 MHz ± 1 MHz          |             |

### Head TSL parameters

The following parameters and calculations were applied.

|                                  | Temperature     | Permittivity | Conductivity     |
|----------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters      | 22.0 °C         | 40.0         | 1.40 mho/m       |
| Measured Head TSL parameters     | (22.0 ± 0.2) °C | 41.1 ± 6 %   | 1.37 mho/m ± 6 % |
| Head TSL temperature during test | (22.0 ± 0.2) °C | ---          | ---              |

### SAR result with Head TSL

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | condition          |                                   |
|---|--------------------|-----------------------------------|
| SAR measured  | 250 mW input power | 9.66 mW /g                        |
| SAR normalized  | normalized to 1W   | 38.6 mW /g                        |
| SAR for nominal Head TSL parameters <sup>1</sup>      | normalized to 1W   | <b>39.4 mW / g ± 17.0 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                   |
|---|--------------------|-----------------------------------|
| SAR measured  | 250 mW input power | 5.14 mW /g                        |
| SAR normalized  | normalized to 1W   | 20.6 mW /g                        |
| SAR for nominal Head TSL parameters <sup>1</sup>        | normalized to 1W   | <b>20.8 mW / g ± 16.5 % (k=2)</b> |

<sup>1</sup> Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

# TA Technology (Shanghai) Co., Ltd. Test Report

### Body TSL parameters

The following parameters and calculations were applied.

|                                  | Temperature     | Permittivity | Conductivity     |
|----------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters      | 22.0 °C         | 53.3         | 1.52 mho/m       |
| Measured Body TSL parameters     | (22.0 ± 0.2) °C | 54.0 ± 6 %   | 1.49 mho/m ± 6 % |
| Body TSL temperature during test | (21.0 ± 0.2) °C | ---          | ----             |

### SAR result with Body TSL

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | condition          |                                   |
|---|--------------------|-----------------------------------|
| SAR measured  | 250 mW input power | 9.31 mW /g                        |
| SAR normalized  | normalized to 1W   | 37.2 mW /g                        |
| SAR for nominal Body TSL parameters <sup>2</sup>      | normalized to 1W   | <b>37.9 mW / g ± 17.0 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                                   |
|---|--------------------|-----------------------------------|
| SAR measured  | 250 mW input power | 4.97 mW /g                        |
| SAR normalized  | normalized to 1W   | 19.9 mW /g                        |
| SAR for nominal Body TSL parameters <sup>2</sup>        | normalized to 1W   | <b>20.1 mW / g ± 16.5 % (k=2)</b> |

<sup>2</sup> Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

# TA Technology (Shanghai) Co., Ltd.

## Test Report

### Appendix

#### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 46.8 $\Omega$ - 5.7 j $\Omega$ |
| Return Loss                          | - 23.5 dB                      |

#### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 43.0 $\Omega$ - 4.5 j $\Omega$ |
| Return Loss                          | - 21.0 dB                      |

#### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.215 ns |
|                                  |          |

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

#### Additional EUT Data

|                 |               |
|-----------------|---------------|
| Manufactured by | SPEAG         |
| Manufactured on | July 05, 2002 |

**DASY5 Validation Report for Head TSL**

Date/Time: 26.06.2009 11:56:04

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1800 MHz; Type: D1800V2; Serial: SN:2d052**

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: HSL U11 BB

Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.37$  mho/m;  $\epsilon_r = 41.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(4.93, 4.93, 4.93); Calibrated: 30.04.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Pin = 250 mW; dip = 10 mm/Zoom Scan (dist=3mm, probe 0deg) (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.3 V/m; Power Drift = 0.037 dB

Peak SAR (extrapolated) = 17.3 W/kg

**SAR(1 g) = 9.66 mW/g; SAR(10 g) = 5.14 mW/g**

Maximum value of SAR (measured) = 11.7 mW/g

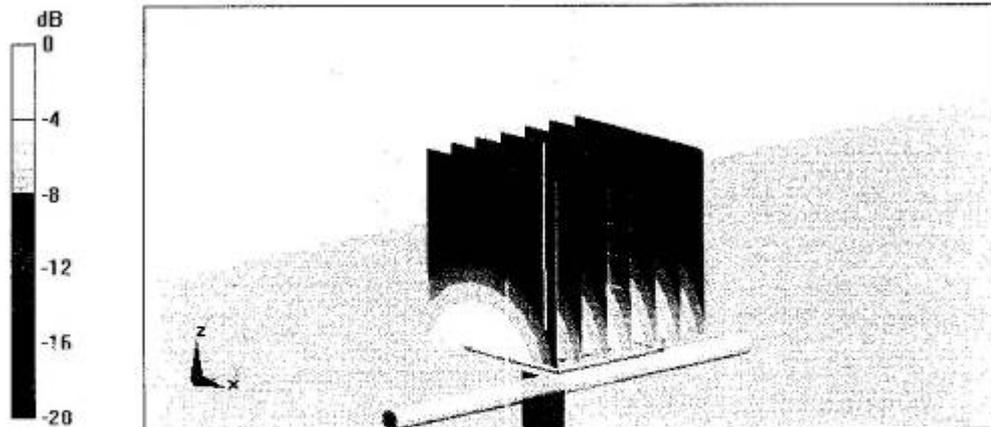


0 dB = 11.7mW/g

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0605

Page 126 of 145

## Impedance Measurement Plot for Head TSL

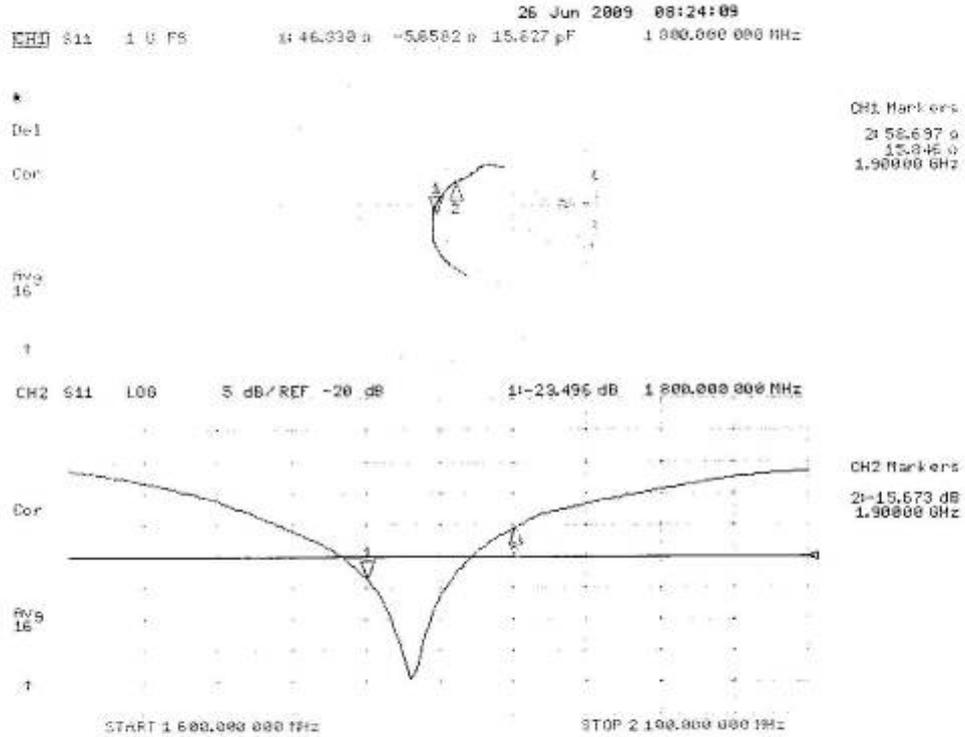

**DASY5 Validation Report for Body TSL**

Date/Time: 23.06.2009 18:19:26

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN:2d052**

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: MSL U10

Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.49$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

**DASY5 Configuration:**

- Probe: ES3DV2 - SN3025; ConvF(4.62, 4.62, 4.62); Calibrated: 30.04.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Pin = 250 mW; dip = 10 mm/Zoom Scan (dist=3.0mm, probe 0deg) (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.3 V/m; Power Drift = -0.00221 dB

Peak SAR (extrapolated) = 16.1 W/kg


**SAR(1 g) = 9.31 mW/g; SAR(10 g) = 4.97 mW/g**

Maximum value of SAR (measured) = 11.7 mW/g

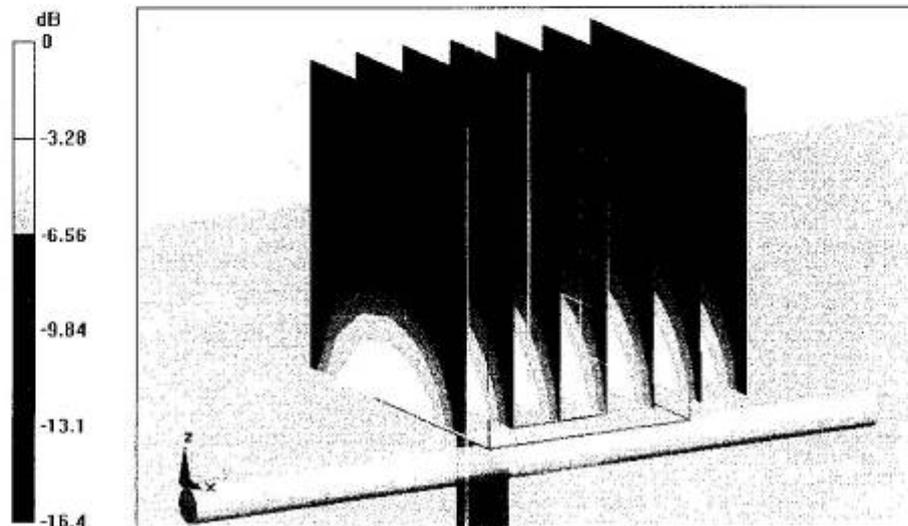

0 dB = 11.7mW/g

**Impedance Measurement Plot for Body TSL**

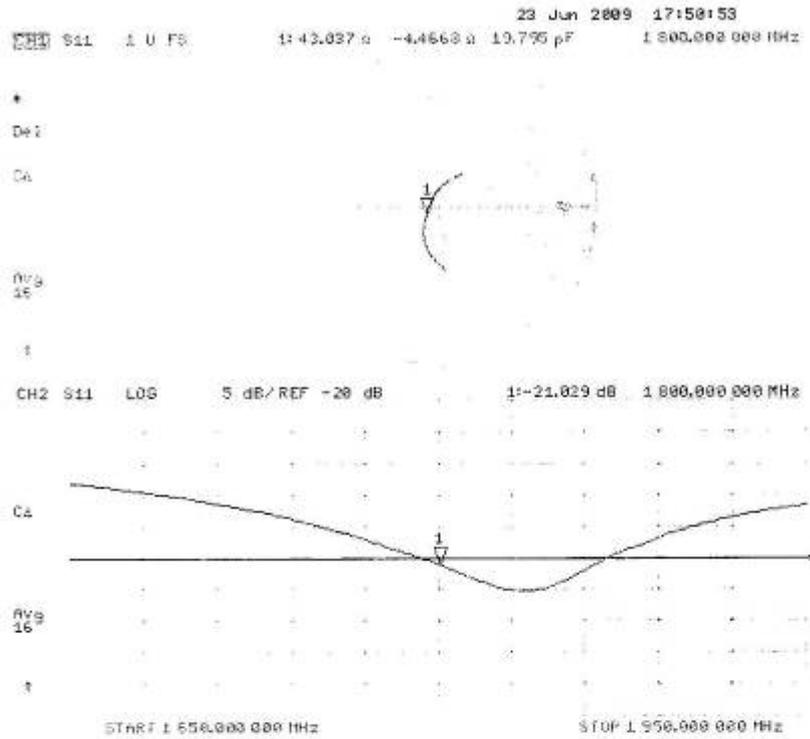

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0605

Page 129 of 145

## ANNEX G: D1900V2 Dipole Calibration Certificate

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Auden**

Certificate No: **D1900V2-5d018-Jun09**

| <b>CALIBRATION CERTIFICATE</b>   |  |   |                        |                   |      |   |                       |                      |            |                           |        |                       |            |                           |        |                            |                |                           |        |                             |                    |                           |        |                        |          |                                |        |      |         |                                |        |                     |      |                       |                 |                       |            |                                   |                        |                         |        |                                  |                        |                           |                  |                                   |                        |
|--|--|---|------------------------|-------------------|------|---|-----------------------|----------------------|------------|---------------------------|--------|-----------------------|------------|---------------------------|--------|----------------------------|----------------|---------------------------|--------|-----------------------------|--------------------|---------------------------|--------|------------------------|----------|--------------------------------|--------|------|---------|--------------------------------|--------|---------------------|------|-----------------------|-----------------|-----------------------|------------|-----------------------------------|------------------------|-------------------------|--------|----------------------------------|------------------------|---------------------------|------------------|-----------------------------------|------------------------|
| Object   | D1900V2 - SN: 5d018  |   |                        |                   |      |   |                       |                      |            |                           |        |                       |            |                           |        |                            |                |                           |        |                             |                    |                           |        |                        |          |                                |        |      |         |                                |        |                     |      |                       |                 |                       |            |                                   |                        |                         |        |                                  |                        |                           |                  |                                   |                        |
| Calibration procedure(s)   | QA CAL-05.v7<br>Calibration procedure for dipole validation kits |   |                        |                   |      |   |                       |                      |            |                           |        |                       |            |                           |        |                            |                |                           |        |                             |                    |                           |        |                        |          |                                |        |      |         |                                |        |                     |      |                       |                 |                       |            |                                   |                        |                         |        |                                  |                        |                           |                  |                                   |                        |
| Calibration date:  | June 26, 2009  |   |                        |                   |      |   |                       |                      |            |                           |        |                       |            |                           |        |                            |                |                           |        |                             |                    |                           |        |                        |          |                                |        |      |         |                                |        |                     |      |                       |                 |                       |            |                                   |                        |                         |        |                                  |                        |                           |                  |                                   |                        |
| Condition of the calibrated item   | In Tolerance   |   |                        |                   |      |   |                       |                      |            |                           |        |                       |            |                           |        |                            |                |                           |        |                             |                    |                           |        |                        |          |                                |        |      |         |                                |        |                     |      |                       |                 |                       |            |                                   |                        |                         |        |                                  |                        |                           |                  |                                   |                        |
| <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).<br/>The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity &lt; 70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Primary Standards</th> <th style="width: 15%;">ID #</th> <th style="width: 35%;">Cal Date (Calibrated by, Certificate No.)</th> <th style="width: 20%;">Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter EPM-442A</td> <td>GB37480704</td> <td>08-Oct-08 (No. 217-00898)</td> <td>Oct-09</td> </tr> <tr> <td>Power sensor HP 8481A</td> <td>US37292783</td> <td>08-Oct-08 (No. 217-00898)</td> <td>Oct-09</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: 5096 (20g)</td> <td>31-Mar-09 (No. 217-01025)</td> <td>Mar-10</td> </tr> <tr> <td>Type-N mismatch combination</td> <td>SN: 5047.2 / 06327</td> <td>31-Mar-09 (No. 217-01029)</td> <td>Mar-10</td> </tr> <tr> <td>Reference Probe ES3DV2</td> <td>SN: 3025</td> <td>30-Apr-09 (No. ES3-3025_Apr09)</td> <td>Apr-10</td> </tr> <tr> <td>DAE4</td> <td>SN: 601</td> <td>07-Mar-09 (No. DAE4-601_Mar09)</td> <td>Mar-10</td> </tr> </tbody> </table><br><table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Secondary Standards</th> <th style="width: 15%;">ID #</th> <th style="width: 35%;">Check Date (in house)</th> <th style="width: 20%;">Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Power sensor HP 8481A</td> <td>MY41092317</td> <td>18-Oct-02 (in house check Oct-07)</td> <td>In house check: Oct-09</td> </tr> <tr> <td>RF generator R&amp;S SMT-06</td> <td>100005</td> <td>4-Aug-99 (in house check Oct-07)</td> <td>In house check: Oct-09</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585 54206</td> <td>18-Oct-01 (in house check Oct-08)</td> <td>In house check: Oct-09</td> </tr> </tbody> </table> |  |   |                        | Primary Standards | ID # | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration | Power meter EPM-442A | GB37480704 | 08-Oct-08 (No. 217-00898) | Oct-09 | Power sensor HP 8481A | US37292783 | 08-Oct-08 (No. 217-00898) | Oct-09 | Reference 20 dB Attenuator | SN: 5096 (20g) | 31-Mar-09 (No. 217-01025) | Mar-10 | Type-N mismatch combination | SN: 5047.2 / 06327 | 31-Mar-09 (No. 217-01029) | Mar-10 | Reference Probe ES3DV2 | SN: 3025 | 30-Apr-09 (No. ES3-3025_Apr09) | Apr-10 | DAE4 | SN: 601 | 07-Mar-09 (No. DAE4-601_Mar09) | Mar-10 | Secondary Standards | ID # | Check Date (in house) | Scheduled Check | Power sensor HP 8481A | MY41092317 | 18-Oct-02 (in house check Oct-07) | In house check: Oct-09 | RF generator R&S SMT-06 | 100005 | 4-Aug-99 (in house check Oct-07) | In house check: Oct-09 | Network Analyzer HP 8753E | US37390585 54206 | 18-Oct-01 (in house check Oct-08) | In house check: Oct-09 |
| Primary Standards  | ID #   | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration  |                   |      |   |                       |                      |            |                           |        |                       |            |                           |        |                            |                |                           |        |                             |                    |                           |        |                        |          |                                |        |      |         |                                |        |                     |      |                       |                 |                       |            |                                   |                        |                         |        |                                  |                        |                           |                  |                                   |                        |
| Power meter EPM-442A   | GB37480704   | 08-Oct-08 (No. 217-00898)                 | Oct-09                 |                   |      |   |                       |                      |            |                           |        |                       |            |                           |        |                            |                |                           |        |                             |                    |                           |        |                        |          |                                |        |      |         |                                |        |                     |      |                       |                 |                       |            |                                   |                        |                         |        |                                  |                        |                           |                  |                                   |                        |
| Power sensor HP 8481A  | US37292783   | 08-Oct-08 (No. 217-00898)                 | Oct-09                 |                   |      |   |                       |                      |            |                           |        |                       |            |                           |        |                            |                |                           |        |                             |                    |                           |        |                        |          |                                |        |      |         |                                |        |                     |      |                       |                 |                       |            |                                   |                        |                         |        |                                  |                        |                           |                  |                                   |                        |
| Reference 20 dB Attenuator   | SN: 5096 (20g)   | 31-Mar-09 (No. 217-01025)                 | Mar-10                 |                   |      |   |                       |                      |            |                           |        |                       |            |                           |        |                            |                |                           |        |                             |                    |                           |        |                        |          |                                |        |      |         |                                |        |                     |      |                       |                 |                       |            |                                   |                        |                         |        |                                  |                        |                           |                  |                                   |                        |
| Type-N mismatch combination  | SN: 5047.2 / 06327   | 31-Mar-09 (No. 217-01029)                 | Mar-10                 |                   |      |   |                       |                      |            |                           |        |                       |            |                           |        |                            |                |                           |        |                             |                    |                           |        |                        |          |                                |        |      |         |                                |        |                     |      |                       |                 |                       |            |                                   |                        |                         |        |                                  |                        |                           |                  |                                   |                        |
| Reference Probe ES3DV2   | SN: 3025   | 30-Apr-09 (No. ES3-3025_Apr09)            | Apr-10                 |                   |      |   |                       |                      |            |                           |        |                       |            |                           |        |                            |                |                           |        |                             |                    |                           |        |                        |          |                                |        |      |         |                                |        |                     |      |                       |                 |                       |            |                                   |                        |                         |        |                                  |                        |                           |                  |                                   |                        |
| DAE4   | SN: 601  | 07-Mar-09 (No. DAE4-601_Mar09)            | Mar-10                 |                   |      |   |                       |                      |            |                           |        |                       |            |                           |        |                            |                |                           |        |                             |                    |                           |        |                        |          |                                |        |      |         |                                |        |                     |      |                       |                 |                       |            |                                   |                        |                         |        |                                  |                        |                           |                  |                                   |                        |
| Secondary Standards  | ID #   | Check Date (in house)                     | Scheduled Check        |                   |      |   |                       |                      |            |                           |        |                       |            |                           |        |                            |                |                           |        |                             |                    |                           |        |                        |          |                                |        |      |         |                                |        |                     |      |                       |                 |                       |            |                                   |                        |                         |        |                                  |                        |                           |                  |                                   |                        |
| Power sensor HP 8481A  | MY41092317   | 18-Oct-02 (in house check Oct-07)         | In house check: Oct-09 |                   |      |   |                       |                      |            |                           |        |                       |            |                           |        |                            |                |                           |        |                             |                    |                           |        |                        |          |                                |        |      |         |                                |        |                     |      |                       |                 |                       |            |                                   |                        |                         |        |                                  |                        |                           |                  |                                   |                        |
| RF generator R&S SMT-06  | 100005   | 4-Aug-99 (in house check Oct-07)          | In house check: Oct-09 |                   |      |   |                       |                      |            |                           |        |                       |            |                           |        |                            |                |                           |        |                             |                    |                           |        |                        |          |                                |        |      |         |                                |        |                     |      |                       |                 |                       |            |                                   |                        |                         |        |                                  |                        |                           |                  |                                   |                        |
| Network Analyzer HP 8753E  | US37390585 54206   | 18-Oct-01 (in house check Oct-08)         | In house check: Oct-09 |                   |      |   |                       |                      |            |                           |        |                       |            |                           |        |                            |                |                           |        |                             |                    |                           |        |                        |          |                                |        |      |         |                                |        |                     |      |                       |                 |                       |            |                                   |                        |                         |        |                                  |                        |                           |                  |                                   |                        |
| Calibrated by:   | Name<br><b>Jeton Kastrot</b>                                     | Function<br><b>Laboratory Technician</b>  | Signature<br>          |                   |      |   |                       |                      |            |                           |        |                       |            |                           |        |                            |                |                           |        |                             |                    |                           |        |                        |          |                                |        |      |         |                                |        |                     |      |                       |                 |                       |            |                                   |                        |                         |        |                                  |                        |                           |                  |                                   |                        |
| Approved by:   | Name<br><b>Katja Pokovic</b>                                     | Function<br><b>Technical Manager</b>      | Signature<br>          |                   |      |   |                       |                      |            |                           |        |                       |            |                           |        |                            |                |                           |        |                             |                    |                           |        |                        |          |                                |        |      |         |                                |        |                     |      |                       |                 |                       |            |                                   |                        |                         |        |                                  |                        |                           |                  |                                   |                        |
|  |  |   | Issued: June 29, 2009  |                   |      |   |                       |                      |            |                           |        |                       |            |                           |        |                            |                |                           |        |                             |                    |                           |        |                        |          |                                |        |      |         |                                |        |                     |      |                       |                 |                       |            |                                   |                        |                         |        |                                  |                        |                           |                  |                                   |                        |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.  |  |   |                        |                   |      |   |                       |                      |            |                           |        |                       |            |                           |        |                            |                |                           |        |                             |                    |                           |        |                        |          |                                |        |      |         |                                |        |                     |      |                       |                 |                       |            |                                   |                        |                         |        |                                  |                        |                           |                  |                                   |                        |

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

# TA Technology (Shanghai) Co., Ltd. Test Report

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |                           |             |
|-------------------------------------|---------------------------|-------------|
| <b>DASY Version</b>                 | DASY5                     | V5.0        |
| <b>Extrapolation</b>                | Advanced Extrapolation    |             |
| <b>Phantom</b>                      | Modular Flat Phantom V5.0 |             |
| <b>Distance Dipole Center - TSL</b> | 10 mm                     | with Spacer |
| <b>Zoom Scan Resolution</b>         | dx, dy, dz = 5 mm         |             |
| <b>Frequency</b>                    | 1900 MHz ± 1 MHz          |             |

### Head TSL parameters

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| <b>Nominal Head TSL parameters</b>      | 22.0 °C         | 40.0         | 1.40 mho/m       |
| <b>Measured Head TSL parameters</b>     | (22.0 ± 0.2) °C | 41.0 ± 6 %   | 1.42 mho/m ± 6 % |
| <b>Head TSL temperature during test</b> | (22.0 ± 0.2) °C | ----         | ----             |

### SAR result with Head TSL

| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | condition          |                                   |
|---|--------------------|-----------------------------------|
| SAR measured  | 250 mW input power | 10.3 mW / g                       |
| SAR normalized  | normalized to 1W   | 41.2 mW / g                       |
| SAR for nominal Head TSL parameters <sup>1</sup>            | normalized to 1W   | <b>41.1 mW / g ± 17.0 % (k=2)</b> |

| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | Condition          |                                   |
|---|--------------------|-----------------------------------|
| SAR measured  | 250 mW input power | 5.38 mW / g                       |
| SAR normalized  | normalized to 1W   | 21.5 mW / g                       |
| SAR for nominal Head TSL parameters <sup>1</sup>              | normalized to 1W   | <b>21.5 mW / g ± 16.5 % (k=2)</b> |

<sup>1</sup> Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**Appendix**

**Antenna Parameters with Head TSL**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.8 $\Omega$ + 2.7 j $\Omega$ |
| Return Loss                          | - 29.9 dB                      |

**Antenna Parameters with Body TSL**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 46.6 $\Omega$ + 4.3 j $\Omega$ |
| Return Loss                          | - 24.9 dB                      |

**General Antenna Parameters and Design**

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.195 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.  
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

|                 |               |
|-----------------|---------------|
| Manufactured by | SPEAG         |
| Manufactured on | June 04, 2002 |

**DASY5 Validation Report for Head TSL**

Date/Time: 26.06.2009 13:05:15

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d018**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U11 BB

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.42$  mho/m;  $\epsilon_r = 41$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

**DASY5 Configuration:**

- Probe: ES3DV2 - SN3025; ConvF(4.88, 4.88, 4.88); Calibrated: 30.04.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Pin = 250 mW; dip = 10 mm/Zoom Scan (dist=3.0 mm, probe 0deg) (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.6 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 18.7 W/kg

**SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.38 mW/g**

Maximum value of SAR (measured) = 12.6 mW/g

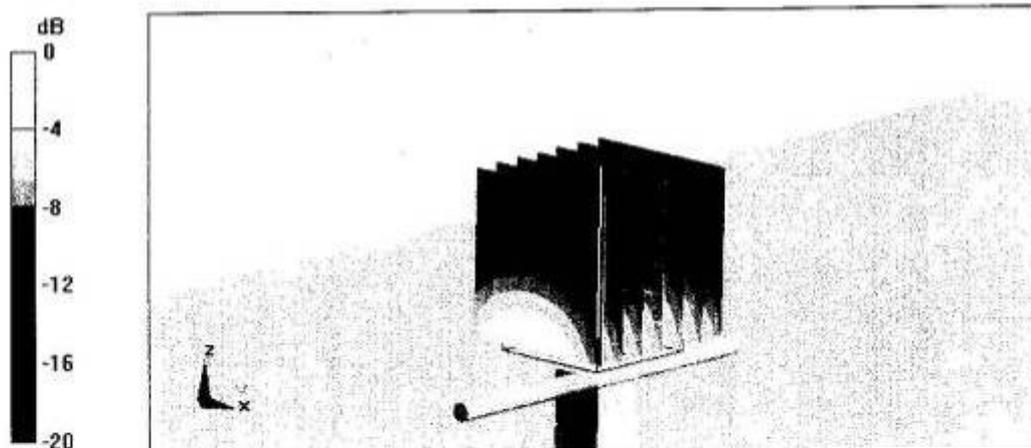


0 dB = 12.6mW/g

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0605

Page 134 of 145

## Impedance Measurement Plot for Head TSL

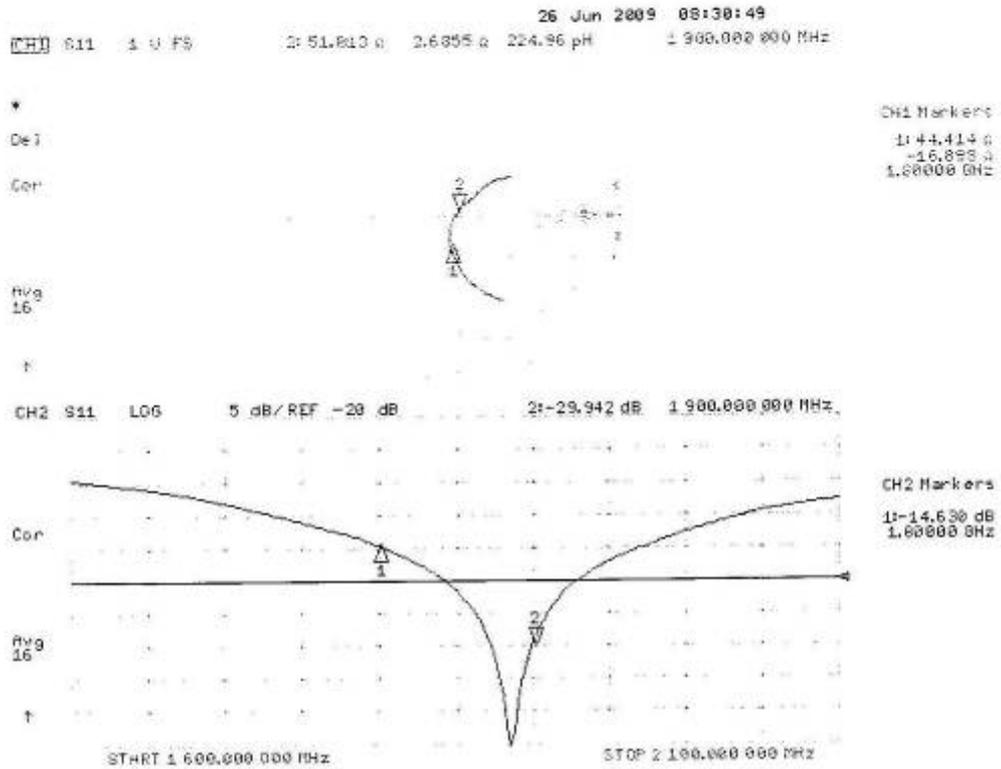

**DASY5 Validation Report for Body TSL**

Date/Time: 26.06.2009 14:30:50

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d018**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U10 BB

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

**DASY5 Configuration:**

- Probe: ES3DV2 - SN3025; ConvF(4.46, 4.46, 4.46); Calibrated: 30.04.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sa601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Pin = 250 mW; dip = 10 mm/Zoom Scan (dist=3.0mm, probe 0deg) (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.8 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 18.9 W/kg

**SAR(1 g) = 10.5 mW/g; SAR(10 g) = 5.52 mW/g**


Maximum value of SAR (measured) = 13.3 mW/g

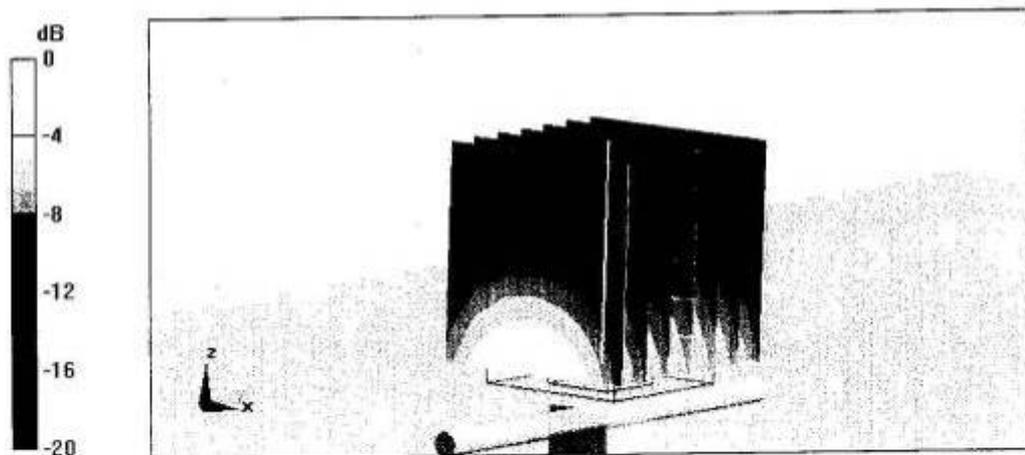

0 dB = 13.3mW/g

TA Technology (Shanghai) Co., Ltd.  
Test Report

Impedance Measurement Plot for Body TSL

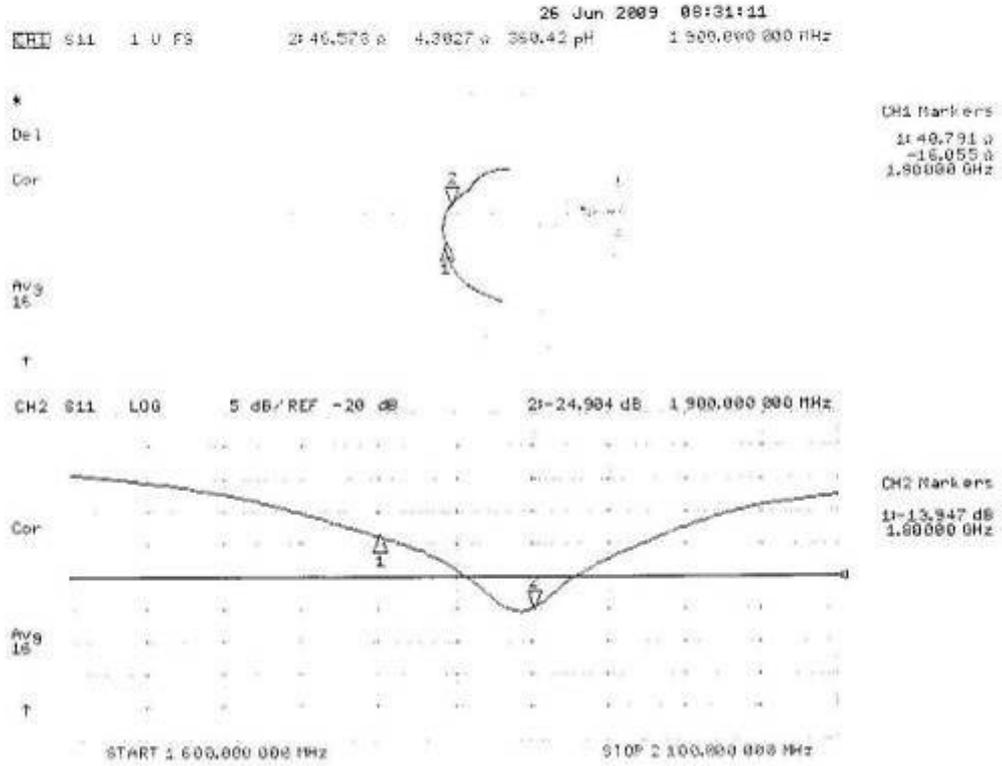

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0605

Page 137of 145

## ANNEX H: DAE4 Calibration Certificate

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TA - SH (Auden)**

Certificate No: **DAE4-871\_Nov09**

### CALIBRATION CERTIFICATE

Object **DAE4 - SD 000 D04 BJ - SN: 871**

Calibration procedure(s) **QA CAL-06.v12  
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **November 11, 2009**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards             | ID #               | Cal Date (Certificate No.) | Scheduled Calibration  |
|-------------------------------|--------------------|----------------------------|------------------------|
| Keithley Multimeter Type 2001 | SN: 0810278        | 1-Oct-09 (No: 9055)        | Oct-10                 |
| Secondary Standards           | ID #               | Check Date (in house)      | Scheduled Check        |
| Calibrator Box V1.1           | SE UMS 006 AB 1004 | 05-Jun-09 (in house check) | In house check: Jun-10 |

|                |                              |                                     |               |
|----------------|------------------------------|-------------------------------------|---------------|
| Calibrated by: | Name<br><b>Andrea Guntli</b> | Function<br><b>Technician</b>       | Signature<br> |
| Approved by:   | Name<br><b>Fin Bornholt</b>  | Function<br><b>R&amp;D Director</b> | Signature<br> |

Issued: November 11, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary

DAE data acquisition electronics  
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

### Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - *DC Voltage Measurement Linearity:* Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - *Common mode sensitivity:* Influence of a positive or negative common mode voltage on the differential measurement.
  - *Channel separation:* Influence of a voltage on the neighbor channels not subject to an input voltage.
  - *AD Converter Values with inputs shorted:* Values on the internal AD converter corresponding to zero input voltage
  - *Input Offset Measurement:* Output voltage and statistical results over a large number of zero voltage measurements.
  - *Input Offset Current:* Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - *Input resistance:* DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - *Low Battery Alarm Voltage:* Typical value for information. Below this voltage, a battery alarm signal is generated.
  - *Power consumption:* Typical value for information. Supply currents in various operating modes.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0605

Page 139 of 145

### DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 $\mu$ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X                        | Y                        | Z                        |
|---------------------|--------------------------|--------------------------|--------------------------|
| High Range          | 404.813 $\pm$ 0.1% (k=2) | 404.794 $\pm$ 0.1% (k=2) | 405.237 $\pm$ 0.1% (k=2) |
| Low Range           | 3.98191 $\pm$ 0.7% (k=2) | 3.98417 $\pm$ 0.7% (k=2) | 3.98912 $\pm$ 0.7% (k=2) |

### Connector Angle

|   |                         |
|---|-------------------------|
| Connector Angle to be used in DASY system | 90.0 $\pm$ 1 $^{\circ}$ |
|---|-------------------------|

# TA Technology (Shanghai) Co., Ltd.

## Test Report

### Appendix

#### 1. DC Voltage Linearity

| High Range        | Reading ( $\mu\text{V}$ ) | Difference ( $\mu\text{V}$ ) | Error (%) |
|-------------------|---------------------------|------------------------------|-----------|
| Channel X + Input | 199994.0                  | 1.84                         | 0.00      |
| Channel X + Input | 19999.85                  | 0.05                         | 0.00      |
| Channel X - Input | -19997.97                 | 1.83                         | -0.01     |
| Channel Y + Input | 200010.3                  | -3.71                        | -0.00     |
| Channel Y + Input | 19999.12                  | -0.48                        | -0.00     |
| Channel Y - Input | -20000.18                 | -0.78                        | 0.00      |
| Channel Z + Input | 200010.2                  | -2.80                        | -0.00     |
| Channel Z + Input | 19998.54                  | -0.86                        | -0.00     |
| Channel Z - Input | -19999.82                 | 0.00                         | 0.00      |

| Low Range         | Reading ( $\mu\text{V}$ ) | Difference ( $\mu\text{V}$ ) | Error (%) |
|-------------------|---------------------------|------------------------------|-----------|
| Channel X + Input | 2000.3                    | 0.22                         | 0.01      |
| Channel X + Input | 200.20                    | 0.30                         | 0.15      |
| Channel X - Input | -199.89                   | 0.21                         | -0.10     |
| Channel Y + Input | 1999.8                    | -0.13                        | -0.01     |
| Channel Y + Input | 200.06                    | -0.04                        | -0.02     |
| Channel Y - Input | -200.43                   | -0.73                        | 0.36      |
| Channel Z + Input | 1999.5                    | -0.57                        | -0.03     |
| Channel Z + Input | 199.58                    | -0.72                        | -0.36     |
| Channel Z - Input | -201.11                   | -1.01                        | 0.51      |

#### 2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | Common mode Input Voltage (mV) | High Range Average Reading ( $\mu\text{V}$ ) | Low Range Average Reading ( $\mu\text{V}$ ) |
|-----------|--------------------------------|--|---|
| Channel X | 200                            | 13.79  | 12.75                                       |
|           | -200                           | -12.26                                       | -13.72                                      |
| Channel Y | 200                            | -11.82                                       | -11.47                                      |
|           | -200                           | 10.67  | 10.68                                       |
| Channel Z | 200                            | -1.08  | -1.35                                       |
|           | -200                           | 0.32   | 0.12  |

#### 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | Input Voltage (mV) | Channel X ( $\mu\text{V}$ ) | Channel Y ( $\mu\text{V}$ ) | Channel Z ( $\mu\text{V}$ ) |
|-----------|--------------------|-----------------------------|-----------------------------|-----------------------------|
| Channel X | 200                | -                           | 3.36                        | 1.06                        |
| Channel Y | 200                | 1.52                        | -                           | 3.59                        |
| Channel Z | 200                | 2.55                        | 1.41                        | -                           |

# TA Technology (Shanghai) Co., Ltd.

## Test Report

#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | High Range (LSB) | Low Range (LSB) |
|-----------|------------------|-----------------|
| Channel X | 15928            | 16288           |
| Channel Y | 16188            | 15745           |
| Channel Z | 15790            | 16219           |

#### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10MΩ

|           | Average (μV) | min. Offset (μV) | max. Offset (μV) | Std. Deviation (μV) |
|-----------|--------------|------------------|------------------|---------------------|
| Channel X | 0.06         | -3.43            | 1.18             | 0.52                |
| Channel Y | -0.71        | -2.66            | 0.96             | 0.57                |
| Channel Z | -0.95        | -1.94            | 0.04             | 0.41                |

#### 6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

#### 7. Input Resistance

|           | Zeroing (MOhm) | Measuring (MOhm) |
|-----------|----------------|------------------|
| Channel X | 0.1999         | 204.4            |
| Channel Y | 0.1999         | 203.6            |
| Channel Z | 0.1999         | 203.8            |

#### 8. Low Battery Alarm Voltage (verified during pre test)

| Typical values | Alarm Level (VDC) |
|----------------|-------------------|
| Supply (+ Vcc) | +7.9              |
| Supply (- Vcc) | -7.6              |

#### 9. Power Consumption (verified during pre test)

| Typical values | Switched off (mA) | Stand by (mA) | Transmitting (mA) |
|----------------|-------------------|---------------|-------------------|
| Supply (+ Vcc) | +0.0              | +6            | +14               |
| Supply (- Vcc) | -0.01             | -8            | -9                |