

FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : CDMA 1X-EVDO Digital Mobile Phone
BRAND NAME : ZTE
MODEL NAME : ZTE N860
FCC ID : Q78-ZTEN860C
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : Digital Spread Spectrum (DSS)

The product was received on Apr. 19, 2012 and completely tested on May 30, 2012. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Applicant 5

 1.2 Manufacturer..... 5

 1.3 Feature of Equipment Under Test 5

 1.4 Testing Site 6

 1.5 Applied Standards 6

 1.6 Ancillary Equipment List 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 8

 2.1 RF Output Power 8

 2.2 Test Mode..... 9

 2.3 Connection Diagram of Test System..... 10

 2.4 RF Utility 10

3 TEST RESULT 11

 3.1 Number of Channel Measurement 11

 3.2 20dB Bandwidth Measurement 13

 3.3 Hopping Channel Separation Measurement 26

 3.4 Dwell Time Measurement..... 33

 3.5 Peak Output Power Measurement 35

 3.6 Band Edges Measurement..... 38

 3.7 Spurious Emission Measurement..... 49

 3.8 AC Conducted Emission Measurement..... 53

 3.9 Radiated Emission Measurement..... 57

 3.10 Antenna Requirements..... 66

4 LIST OF MEASURING EQUIPMENT..... 67

5 UNCERTAINTY OF EVALUATION..... 68

APPENDIX A. PHOTOGRAPHS OF EUT

APPENDIX B. SETUP PHOTOGRAPHS

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.2	-	Gen 4.4.1	99% Bandwidth	-	Pass	-
3.3	15.247(a)(1)	A8.1(b)	Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.4	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	≤ 125 mW	Pass	-
3.6	15.247(d)	A8.5	Frequency Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	A8.5	Spurious Emission	< 20 dBc	Pass	-
3.8	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 13.02 dB at 0.370 MHz
3.9	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 9.54 dB at 82.380 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	CDMA 1X-EVDO Digital Mobile Phone
Brand Name	ZTE
Model Name	ZTE N860
FCC ID	Q78-ZTEN860C
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Channel Spacing	1 MHz
Maximum Output Power to Antenna	Bluetooth (1Mbps) : -0.38 dBm (0.00092 W) Bluetooth EDR (2Mbps) : 0.16 dBm (0.00104 W) Bluetooth EDR (3Mbps) : -0.41 dBm (0.00091 W)
Antenna Type	PIFA Antenna with gain -4.30 dBi
HW Version	c8hA
SW Version	GB_PMI_N860V1.0.0B01
Type of Modulation	Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
EUT Stage	Identical Prototype

Remark:

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Spread Spectrum (DSS).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH01-KS	CO01-KS	03CH01-KS	149928/4086E-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 3

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
3.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	N/A	N/A
5.	Router	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
6.	Notebook	DELL	P08S	QDS-BRCM1030	N/A	AC I/P: Unshielded, 0.9 m DC O/P:



						Shielded, 1.8 m
--	--	--	--	--	--	-----------------

2 Test Configuration of Equipment Under Test

2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	-1.99 dBm	-1.48 dBm	-1.97 dBm
Ch39	2441MHz	-0.38 dBm	0.16 dBm	-0.41 dBm
Ch78	2480MHz	-1.13 dBm	-0.74 dBm	-1.16 dBm

Remark:

1. The data rate was set in 2Mbps for all the test items due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.

2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests, X, Y, Z in three orthogonal panels, were conducted to determine the final configuration from all possible combinations.

The following tables are showing the test modes as the worst cases (Z plane) and recorded in this report.


Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted TCs	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated TCs	N/A	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	N/A
AC Conducted Emission	Mode 1 :CDMA2000 BC0 Idle + Bluetooth Link + WLAN Link + Adapter + Camera		
Remark: For radiated TCs, the data rate was set in 2Mbps due to the highest RF output power; only the data of these modes was reported.			

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

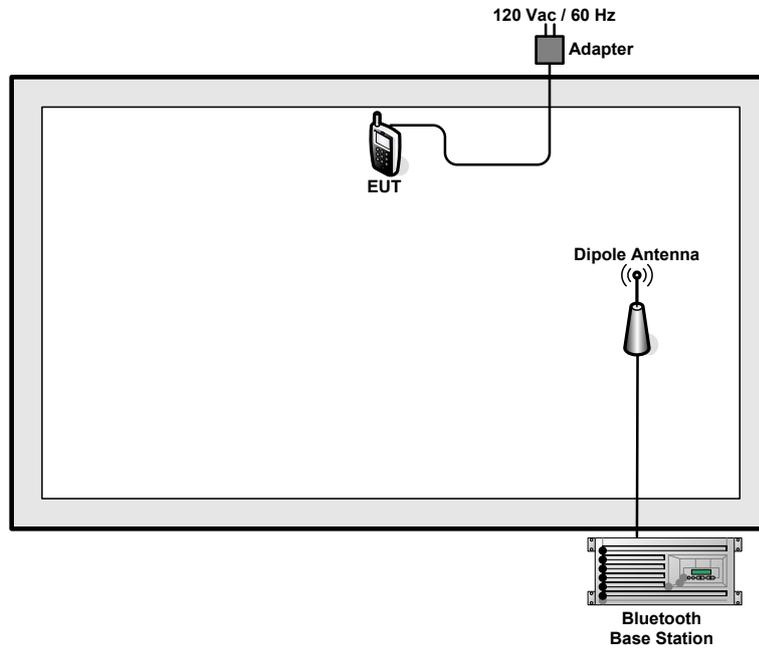

<AC Conducted Emission Mode>

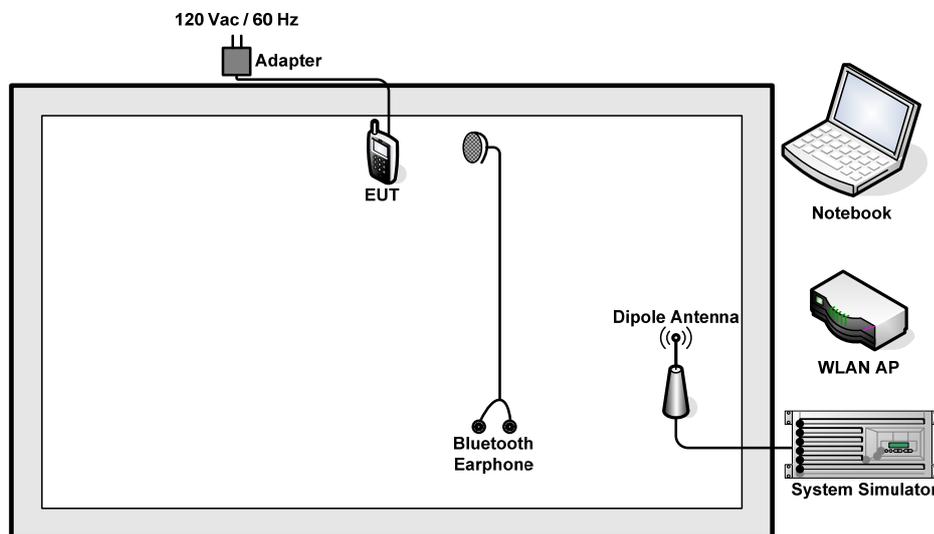

2.4 RF Utility

For Bluetooth function, key in “*983*28#” on the EUT directly. Then, the EUT will get into the engineering modes to contact with Bluetooth base station for continuous transmitting and receiving signals.

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The modulation types of EUT are irrelevant to number of hopping channels deviation.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = the frequency band of operation; $RBW \geq 1\%$ of the span; $VBW \geq RBW$; Sweep = auto;
Detector function = peak; Trace = max hold.
5. The number of hopping frequency used is defined as the device has the numbers of total channel.

3.1.4 Test Setup

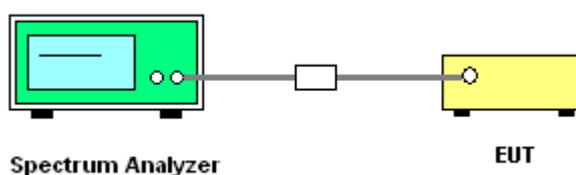





3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	Mode 4~6	Temperature :	23~24°C
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%
Number of Hopping Channels (Channel)		Limits (Channel)	
79		> 15	
		Pass	

Number of Hopping Channel Plot on Channel 00 - 78

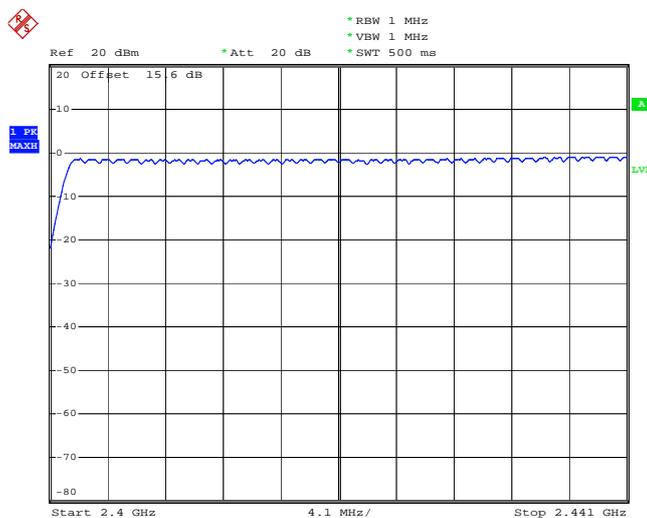

Date: 29.MAY.2012 05:12:13

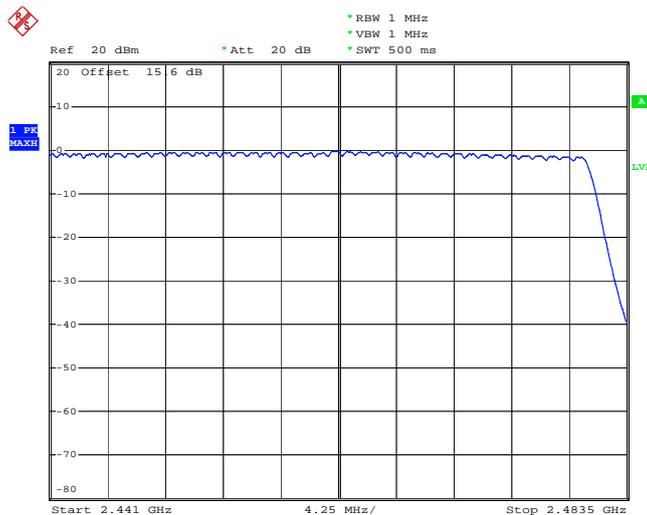

Date: 29.MAY.2012 05:16:17

3.2 20dB and 99% Bandwidth Measurement

3.2.1 Limit of 20dB Bandwidth

N/A


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

3.2.4 Test Setup

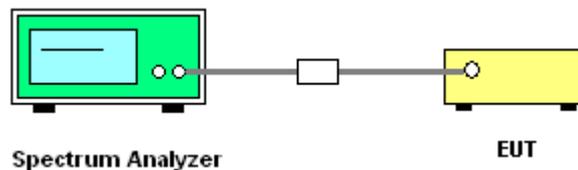




3.2.5 Test Result of 20dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	23~24°C
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.980
39	2441	0.968
78	2480	1.016

20 dB Bandwidth Plot on Channel 00

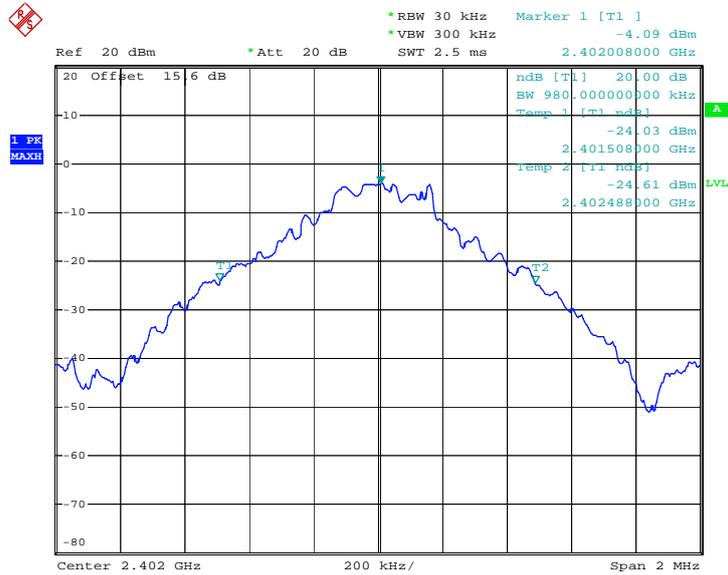


Date: 29.MAY.2012 04:48:57



Test Mode :	Mode 4, 5, 6	Temperature :	23~24°C
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.302
39	2441	1.302
78	2480	1.320

20 dB Bandwidth Plot on Channel 00

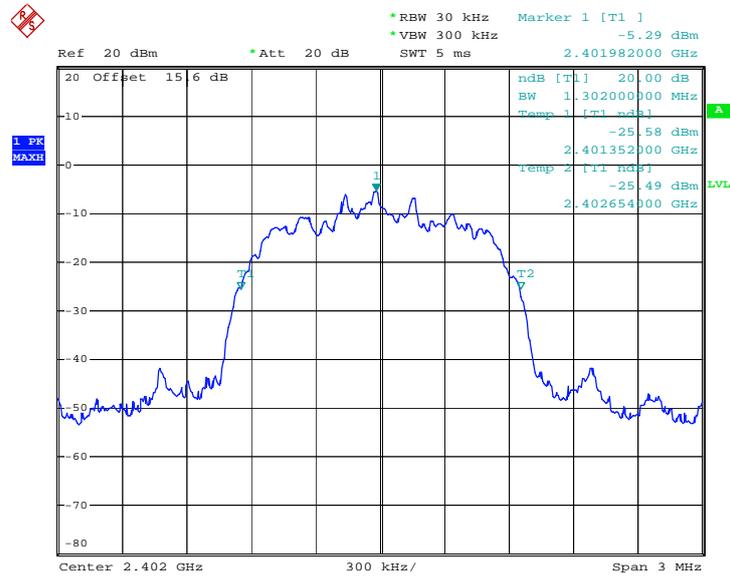


Date: 29.MAY.2012 04:49:56



Test Mode :	Mode 7, 8, 9	Temperature :	23~24°C
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.314
39	2441	1.308
78	2480	1.302


20 dB Bandwidth Plot on Channel 00

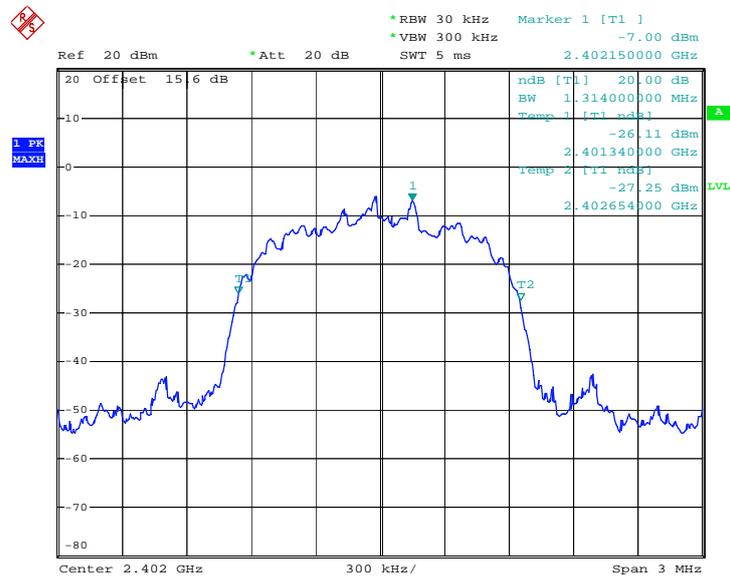

Date: 29.MAY.2012 04:50:58




20 dB Bandwidth Plot on Channel 39

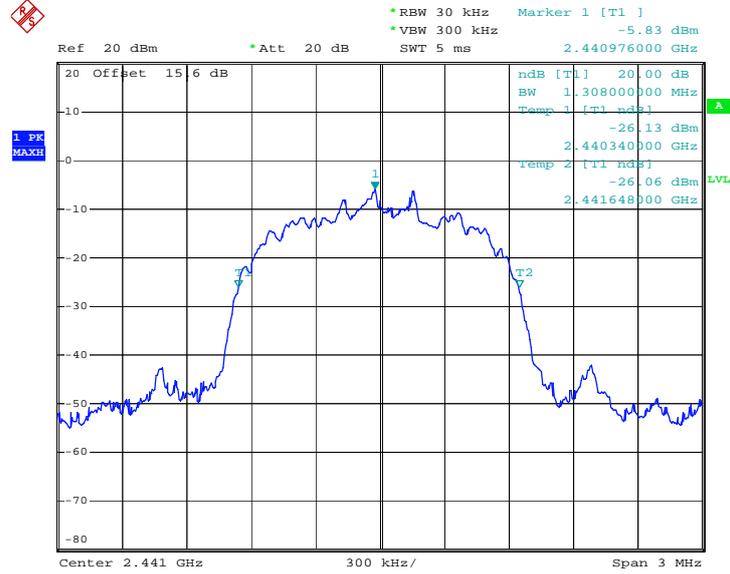

Date: 29.MAY.2012 04:51:13

20 dB Bandwidth Plot on Channel 78

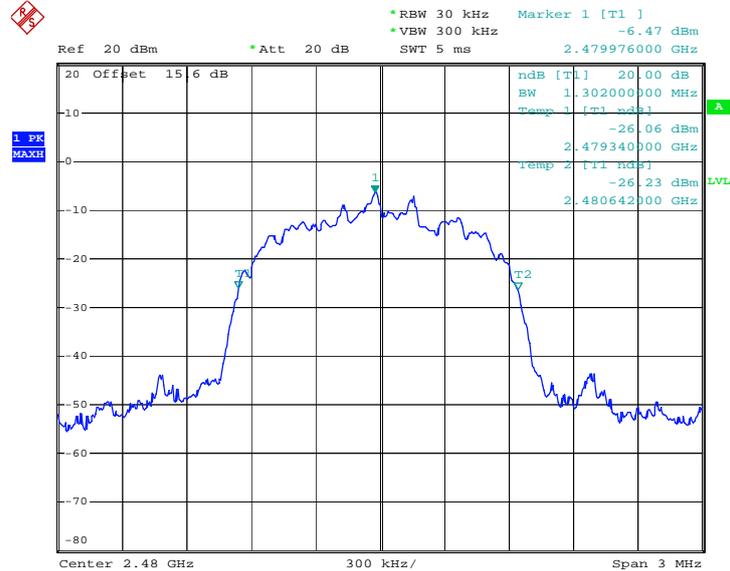

Date: 29.MAY.2012 04:51:28




3.2.6 Test Result of 99% Occupied Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	23~24°C
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.900
39	2441	0.904
78	2480	0.912


99% Bandwidth Plot on Channel 00

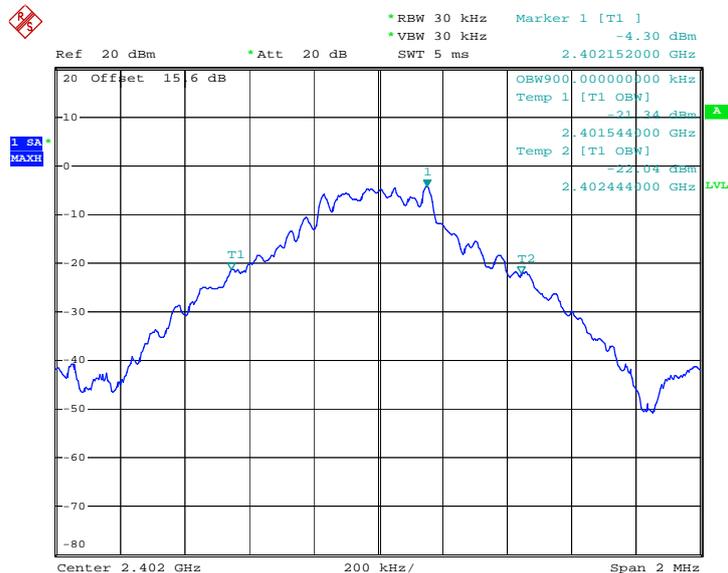

Date: 29.MAY.2012 04:58:31




99% Occupied Bandwidth Plot on Channel 39

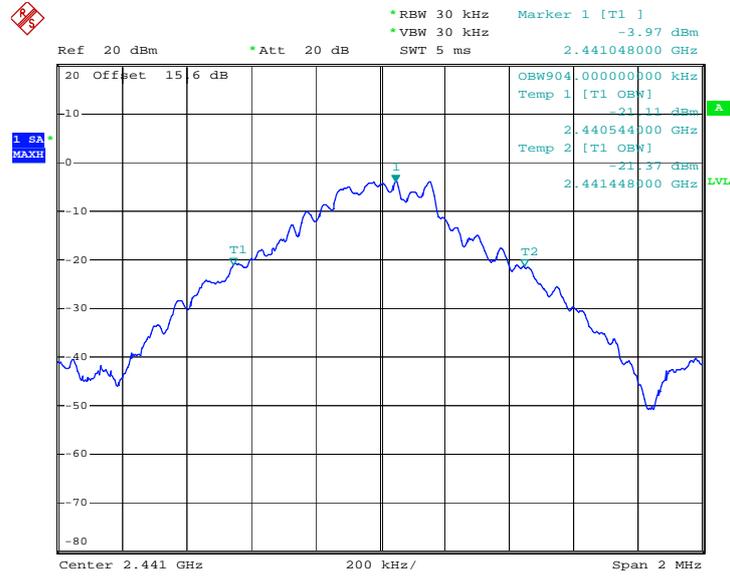

Date: 29.MAY.2012 04:59:11

99% Occupied Bandwidth Plot on Channel 78

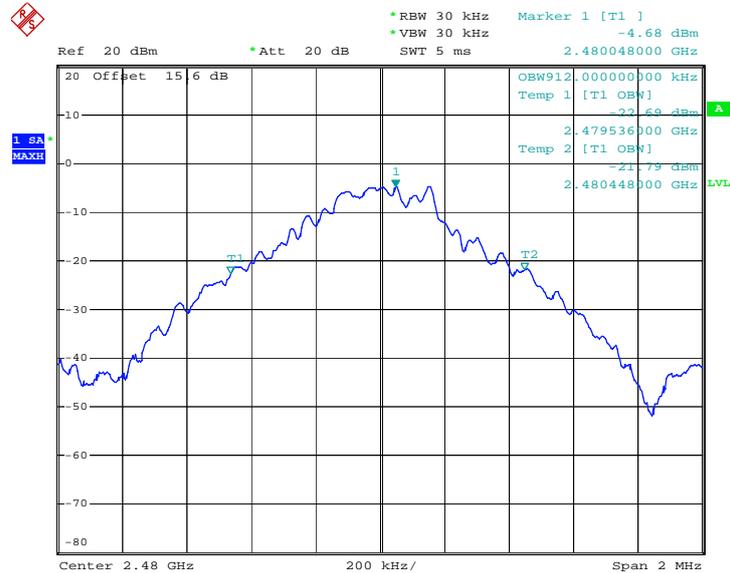


Date: 29.MAY.2012 04:59:51



Test Mode :	Mode 4, 5, 6	Temperature :	23~24°C
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.172
39	2441	1.176
78	2480	1.176

99% Bandwidth Plot on Channel 00

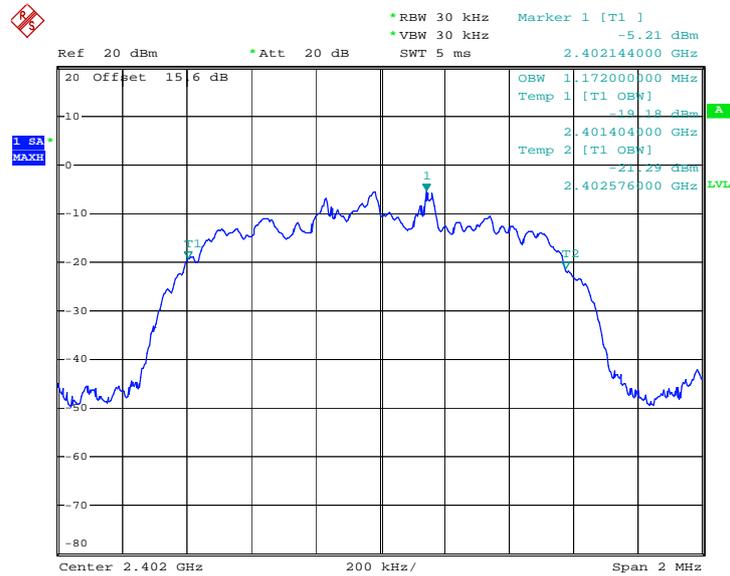


Date: 29.MAY.2012 05:00:31



Test Mode :	Mode 7, 8, 9	Temperature :	23~24°C
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.168
39	2441	1.180
78	2480	1.180


99% Bandwidth Plot on Channel 00

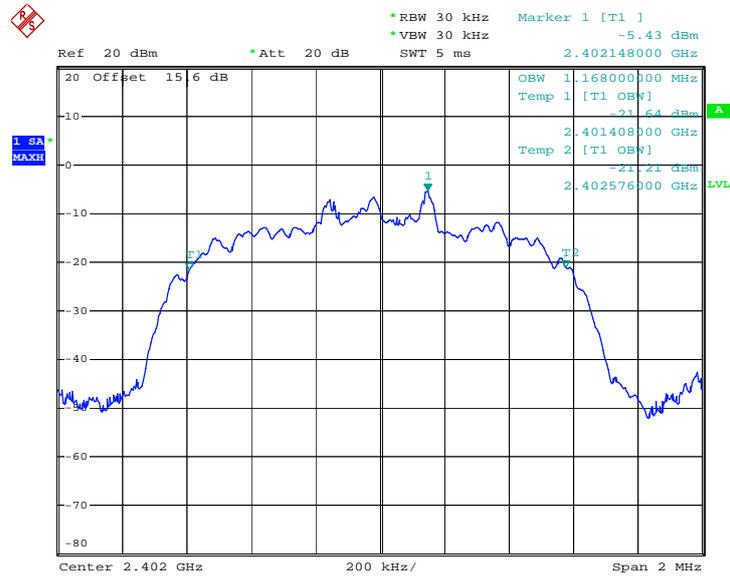

Date: 29.MAY.2012 05:02:30




99% Occupied Bandwidth Plot on Channel 39

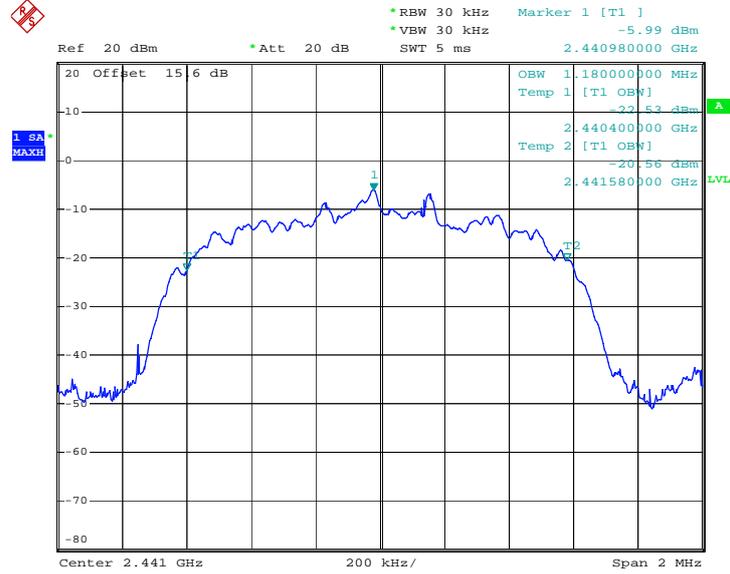

Date: 29.MAY.2012 05:03:09

99% Occupied Bandwidth Plot on Channel 78

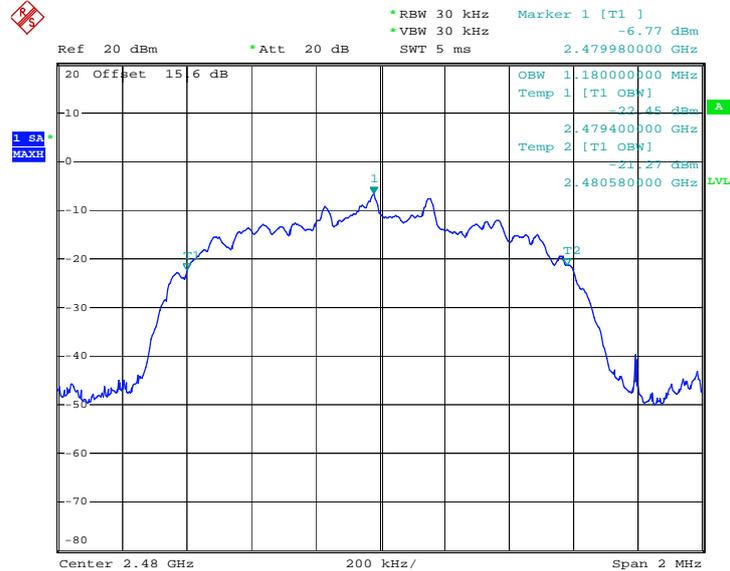

Date: 29.MAY.2012 05:03:49

3.3 Hopping Channel Separation Measurement

3.3.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. Please refer FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

3.3.4 Test Setup

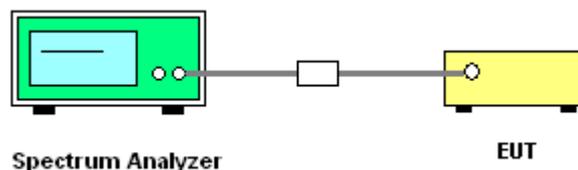




3.3.5 Test Result of Hopping Channel Separation

Test Mode :	Mode 1, 2, 3	Temperature :	23~24°C
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.6533	Pass
39	2441	1.002	0.6453	Pass
78	2480	1.002	0.6773	Pass


Channel Separation Plot on Channel 00 - 01

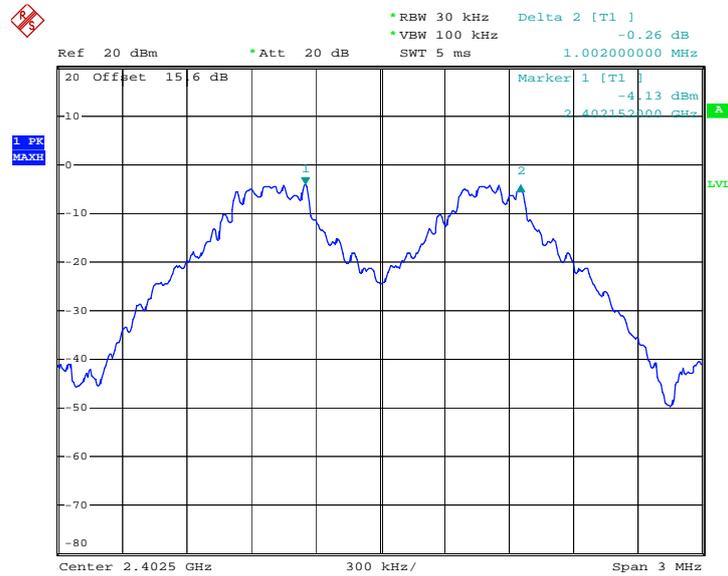

Date: 29.MAY.2012 04:38:31




Channel Separation Plot on Channel 39 - 40

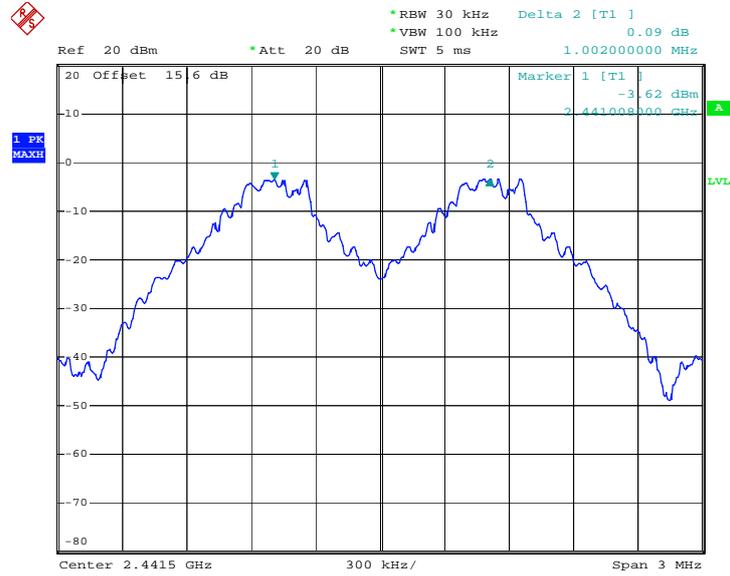

Date: 29.MAY.2012 04:39:14

Channel Separation Plot on Channel 77 - 78

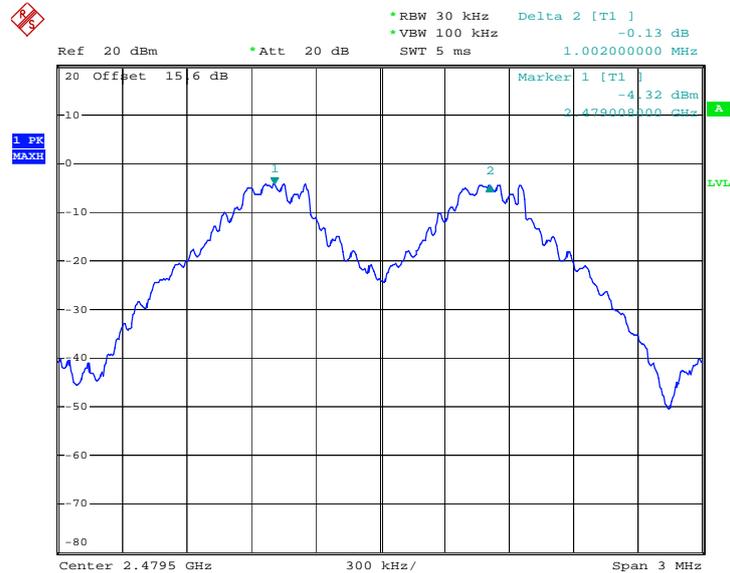


Date: 29.MAY.2012 04:40:30



Test Mode :	Mode 4, 5, 6	Temperature :	23~24°C
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8680	Pass
39	2441	1.002	0.8680	Pass
78	2480	1.002	0.8800	Pass


Channel Separation Plot on Channel 00 - 01

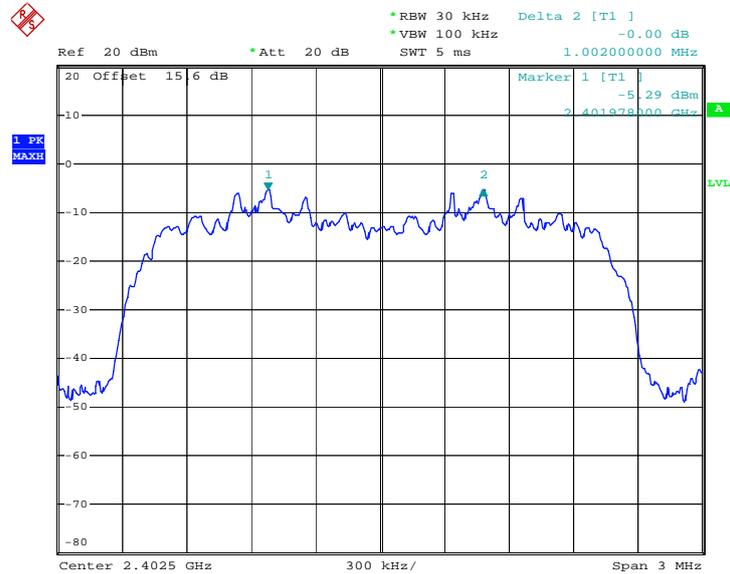

Date: 29.MAY.2012 04:41:51




Channel Separation Plot on Channel 39 - 40

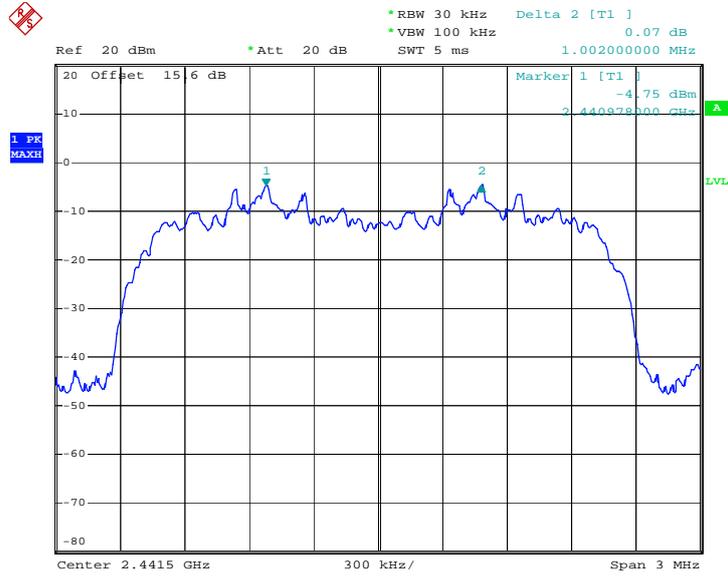

Date: 29.MAY.2012 04:42:35

Channel Separation Plot on Channel 77 - 78

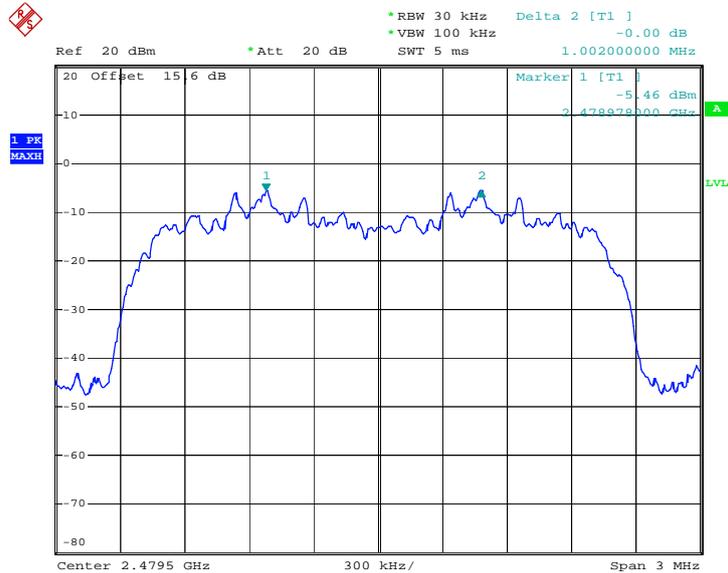


Date: 29.MAY.2012 04:43:19



Test Mode :	Mode 7, 8, 9	Temperature :	23~24°C
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.008	0.8760	Pass
39	2441	1.002	0.8720	Pass
78	2480	1.002	0.8680	Pass


Channel Separation Plot on Channel 00 - 01

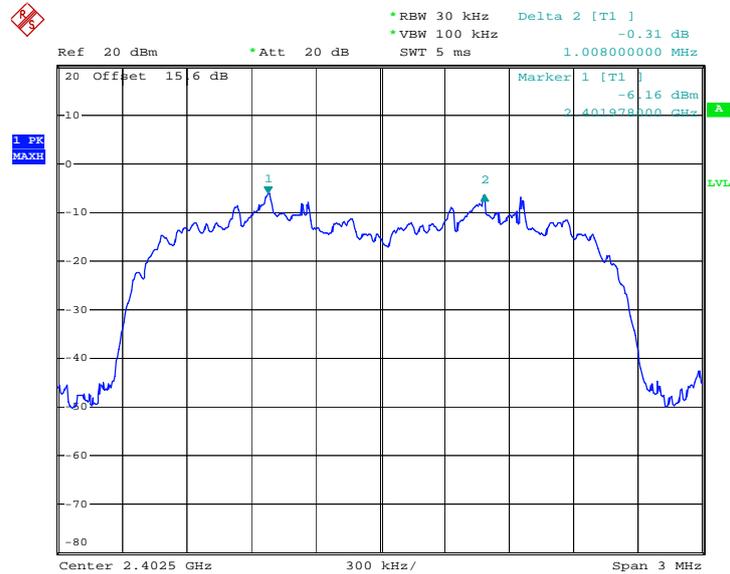

Date: 29.MAY.2012 04:44:32




Channel Separation Plot on Channel 39 - 40

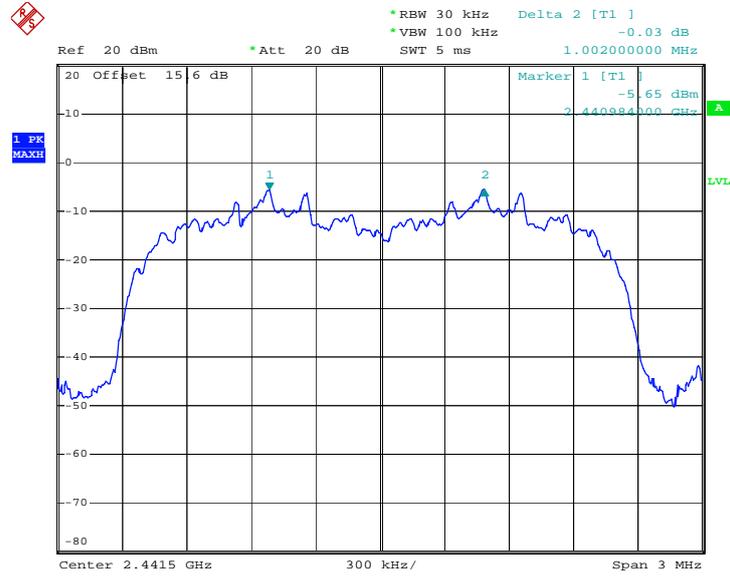

Date: 29.MAY.2012 04:45:15

Channel Separation Plot on Channel 77 - 78

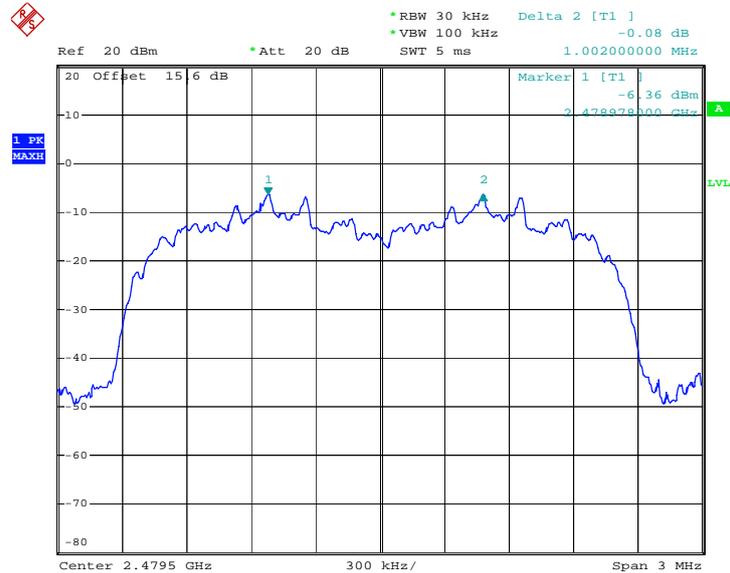

Date: 29.MAY.2012 04:45:57

3.4 Dwell Time Measurement

3.4.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to calculate the dwell time.

3.4.4 Test Setup

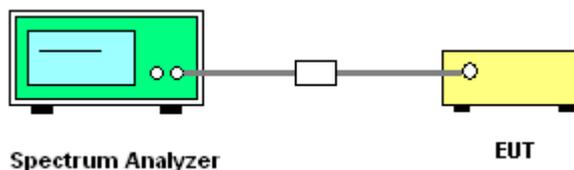

3.4.5 Test Result of Dwell Time

Test Mode :	Mode 5	Temperature :	23~24°C
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%


Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
2DH5	3.30	2960.00	0.31	0.4	Pass

Remark:

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)




2DH5 Dwell Time (One Pulse) Plot on Channel 39

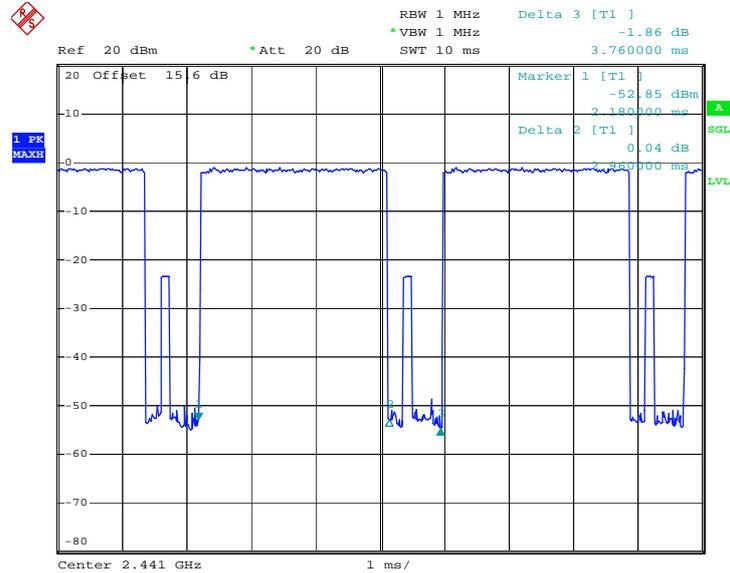

Date: 29.MAY.2012 04:36:33

2DH5 Dwell Time (Count Pulses) Plot on Channel 39

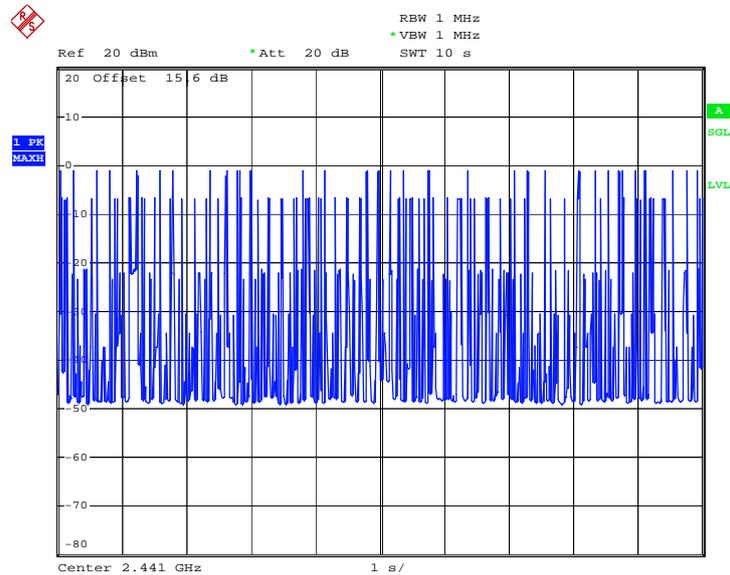

Date: 29.MAY.2012 04:47:48

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.

3.5.4 Test Setup

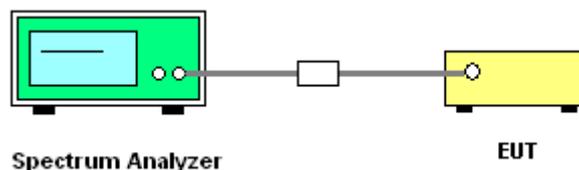




3.5.5 Test Result of Peak Output Power

Test Mode :	Mode 4, 5, 6	Temperature :	23~24°C
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	-1.48	20.97	Pass
39	2441	0.16	20.97	Pass
78	2480	-0.74	20.97	Pass


Peak Output Power Plot on Channel 00

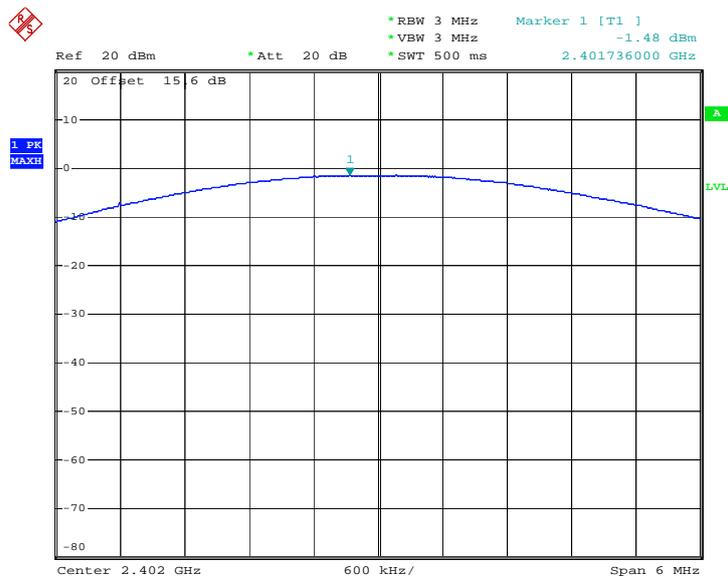

Date: 18.MAY.2012 16:13:32




Peak Output Power Plot on Channel 39

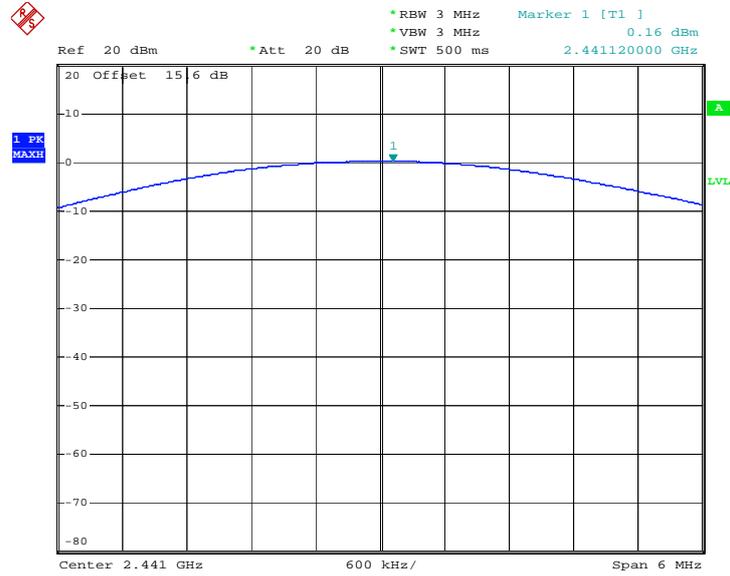

Date: 18.MAY.2012 16:14:48

Peak Output Power Plot on Channel 78

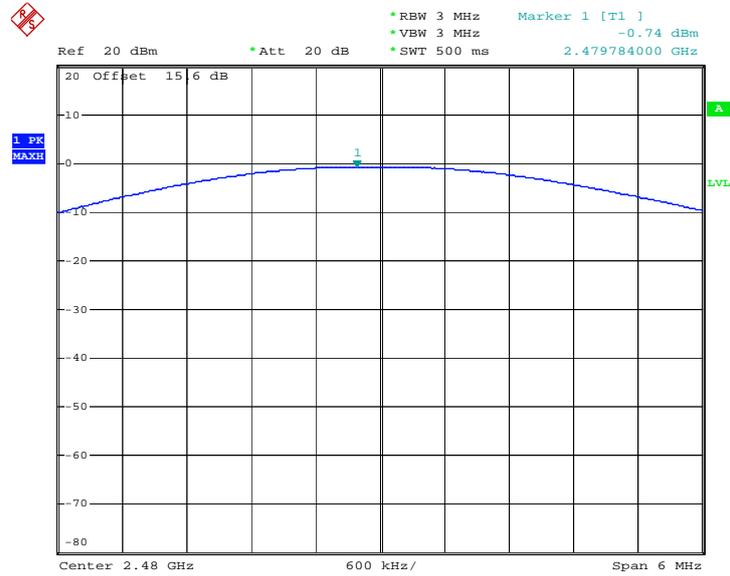

Date: 18.MAY.2012 16:16:04

3.6 Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

3.6.2 Measuring Instruments


See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines.
2. RF antenna conducted test: Set RBW = 300kHz, Video bandwidth (VBW) \geq RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300k Hz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Applies to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 1MHz, Sweep: Auto for Peak; set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto for Average. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See FCC Section 15.35(b) and (c).
4. In case the emission is fail due to the used RBW / VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

3.6.4 Test Setup

<Radiated Band Edges>

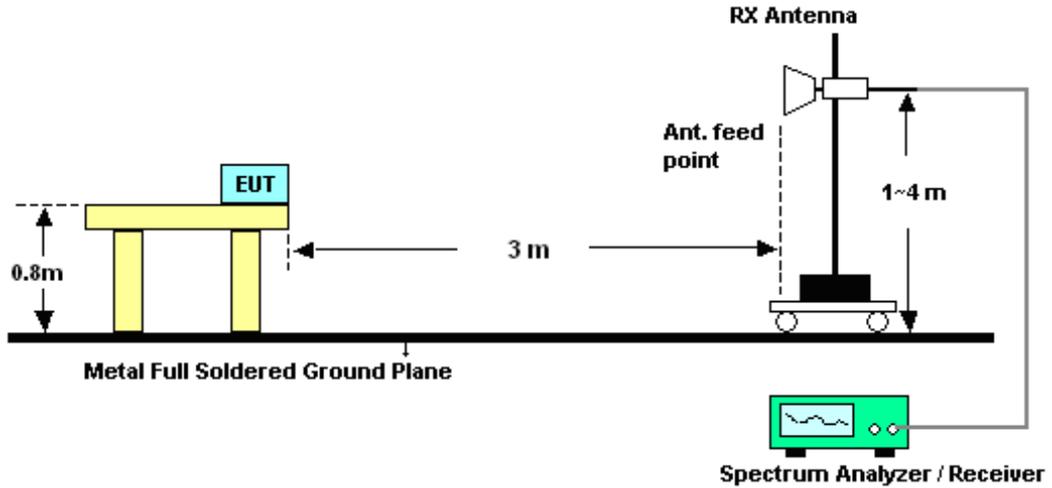

<Conducted Band Edges>

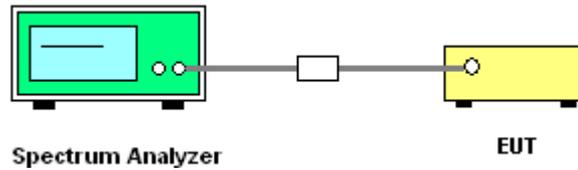



3.6.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	23~25°C
Test Channel :	00	Relative Humidity :	43~45%
		Test Engineer :	Steven Hao

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2386.95	47.36	-26.64	74	45.08	32.86	3.47	34.05	200	314	Peak
2386.95	34.79	-19.21	54	32.51	32.86	3.47	34.05	200	314	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2380.49	47.98	-26.02	74	45.74	32.83	3.42	34.01	112	76	Peak
2380.49	35.96	-18.04	54	33.72	32.83	3.42	34.01	112	76	Average



Test Mode :	Mode 3	Temperature :	23~25°C
Test Channel :	78	Relative Humidity :	43~45%
		Test Engineer :	Steven Hao

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	43.34	-30.66	74	40.85	33.01	3.68	34.2	162	334	Peak
2483.5	31.06	-22.94	54	28.57	33.01	3.68	34.2	162	334	Average

Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission (dBµV/m)	Delta Result (dB)	Average Result (dBµV/m)	Average Limit (dBµV/m)	Margin (dB)	Result
Single Carrier Mode	76.1	45.59	30.51	54	-23.49	Pass
Hopping Mode	76.1	45.04	31.06	54	-22.94	Pass

Note : Average result = Maximum field strength – Delta result

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.424	41.99	-32.01	74	39.5	33.01	3.68	34.2	117	206	Peak
2484.424	28.86	-25.14	54	26.37	33.01	3.68	34.2	117	206	Average


Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission (dBµV/m)	Delta Result (dB)	Average Result (dBµV/m)	Average Limit (dBµV/m)	Margin (dB)	Result
Single Carrier Mode	76.98	48.12	28.86	54	-25.14	Pass
Hopping Mode	76.98	48.43	28.55	54	-25.45	Pass

Note : Average result = Maximum field strength – Delta result



Test Mode :	Mode 3	Temperature :	23~25°C
Test Channel :	78	Relative Humidity :	43~45%
Test Engineer :	Steven Hao	Polarization :	Horizontal

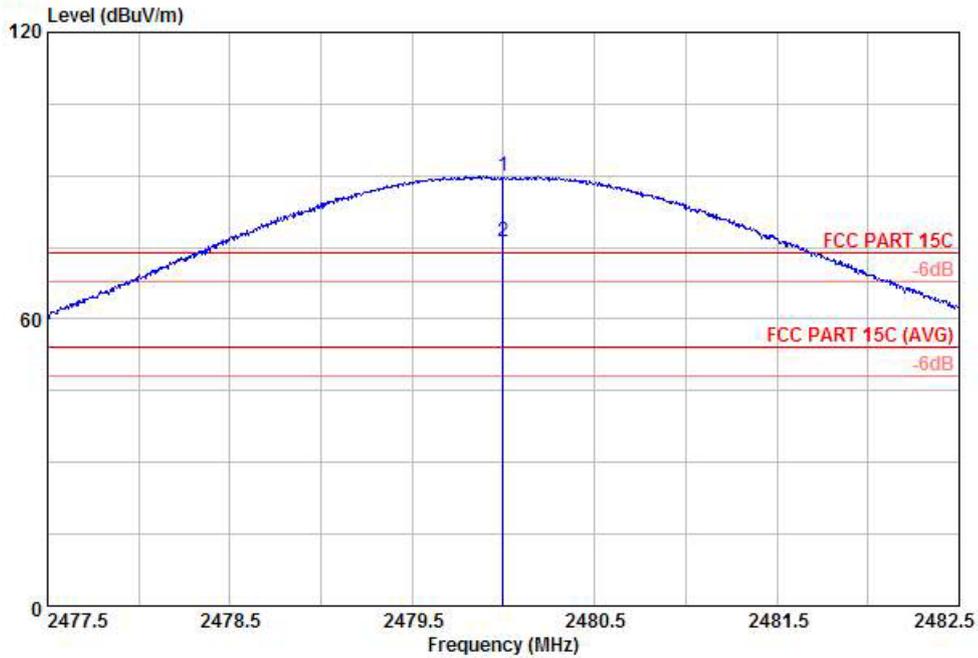

Site : 03CH01-KS
 Condition: FCC PART 15C 3m HF ANI-100803 HORIZONTAL


Mode : mode 3
 Plane : E2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	Remark
					Factor			cm	deg	
1 X	2480.00	89.82	15.82	74.00	87.33	3.68	34.20	101	274	Peak
2 X	2480.00	76.10	22.10	54.00	73.61	3.68	34.20	101	274	Average

* Maximum field strength of the fundamental emission



Test Mode :	Mode 3	Temperature :	23~25°C
Test Channel :	78	Relative Humidity :	43~45%
Test Engineer :	Steven Hao	Polarization :	Horizontal

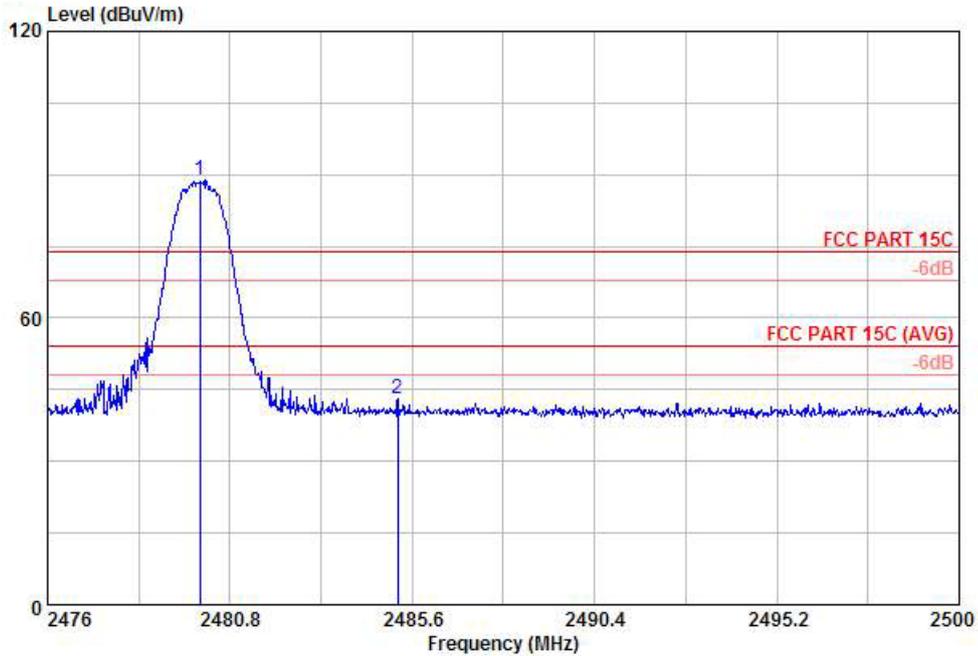

Site : 03CH01-KS
 Condition: FCC PART 15C 3m HF ANI-100803 HORIZONTAL


Mode : mode 3
 Plane : E2

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 X	2480.00	88.83	14.83	74.00	86.34	33.01	3.68	34.20	100	277	Peak
2	2485.22	43.24	-30.76	74.00	40.75	33.01	3.68	34.20	200	73	Peak

* Marker-Delta Method (RBW/VBW=100KHz): 45.59 dB , single carrier Mode



Test Mode :	Mode 3	Temperature :	23~25°C
Test Channel :	78	Relative Humidity :	43~45%
Test Engineer :	Steven Hao	Polarization :	Horizontal

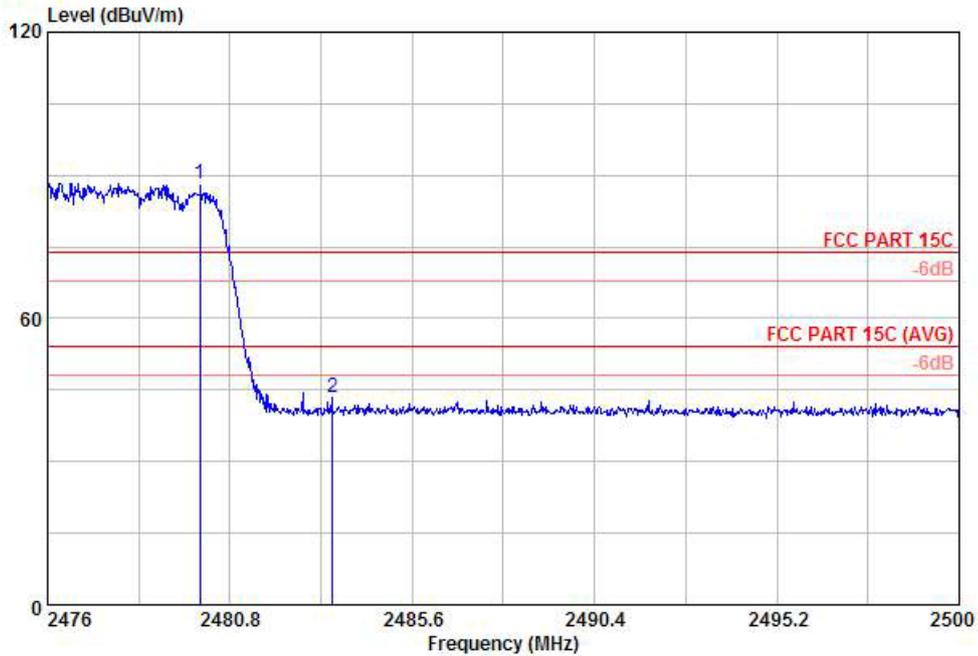

Site : 03CH01-KS
 Condition: FCC PART 15C 3m HF ANI-100803 HORIZONTAL


Mode : mode 3
 Plane : E2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	Loss	Factor	Pos	Pos	
						dB	dB	cm	deg	
1 X	2480.00	88.38	14.38	74.00	85.89	3.68	34.20	102	270	Peak
2	2483.50	43.34	-30.66	74.00	40.85	3.68	34.20	162	334	Peak

* Marker-Delta Method (RBW/VBW=100KHz): 45.04 dB , Hopping Mode



Test Mode :	Mode 3	Temperature :	23~25°C
Test Channel :	78	Relative Humidity :	43~45%
Test Engineer :	Steven Hao	Polarization :	Vertical

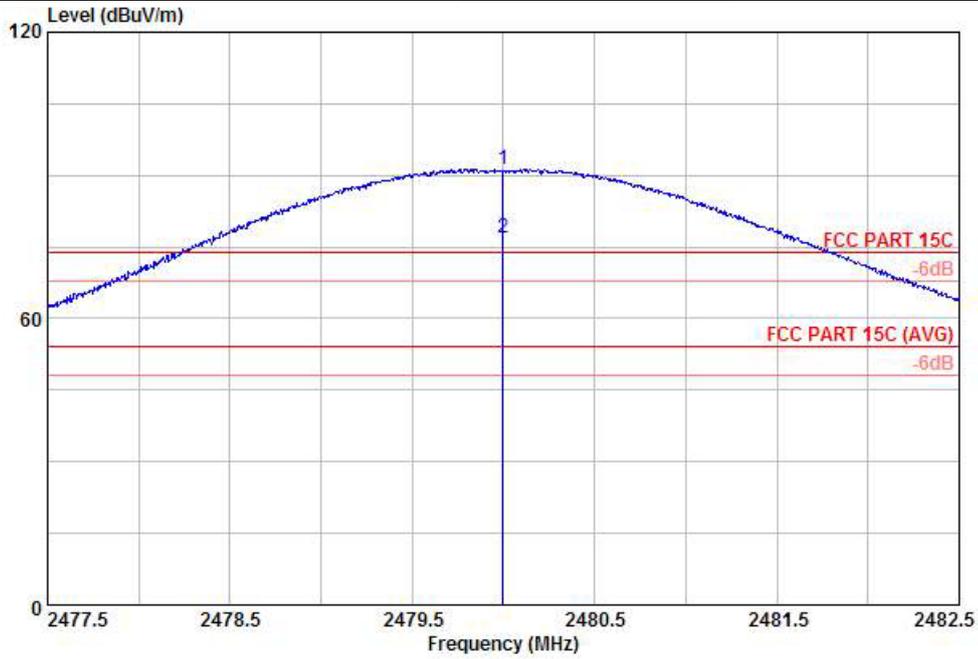

Site : 03CH01-KS
 Condition: FCC PART 15C 3m HF ANI-100803 VERTICAL


Mode : mode 3
 Plane : E2

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 X	2480.00	91.34	17.34	74.00	88.85	33.01	3.68	34.20	100	277	Peak
2 X	2480.00	76.98	22.98	54.00	74.49	33.01	3.68	34.20	100	277	Average

* Maximum field strength of the fundamental emission



Test Mode :	Mode 3	Temperature :	23~25°C
Test Channel :	78	Relative Humidity :	43~45%
Test Engineer :	Steven Hao	Polarization :	Vertical

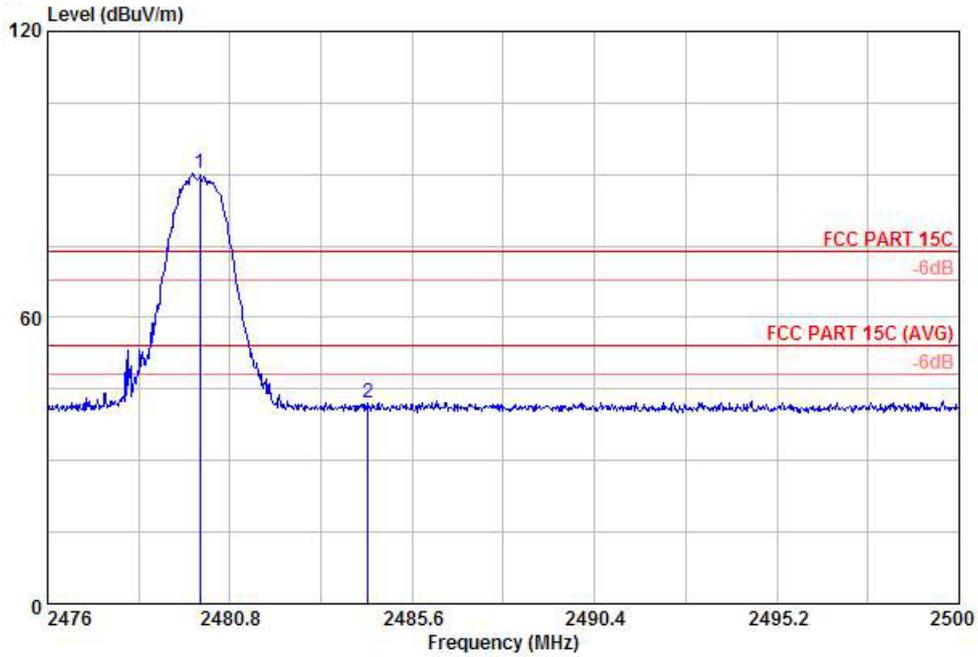

Site : 03CH01-KS
 Condition: FCC PART 15C 3m HF ANI-100803 VERTICAL


Mode : mode 3
 Plane : E2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	Remark
					Factor			cm	deg	
1 X	2480.00	90.11	16.11	74.00	87.62	3.68	34.20	101	278	Peak
2	2484.42	41.99	-32.01	74.00	39.50	3.68	34.20	117	206	Peak

* Marker-Delta Method (RBW/VBW=100KHz): 48.12 dB , single carrier Mode



Test Mode :	Mode 3	Temperature :	23~25°C
Test Channel :	78	Relative Humidity :	43~45%
Test Engineer :	Steven Hao	Polarization :	Vertical

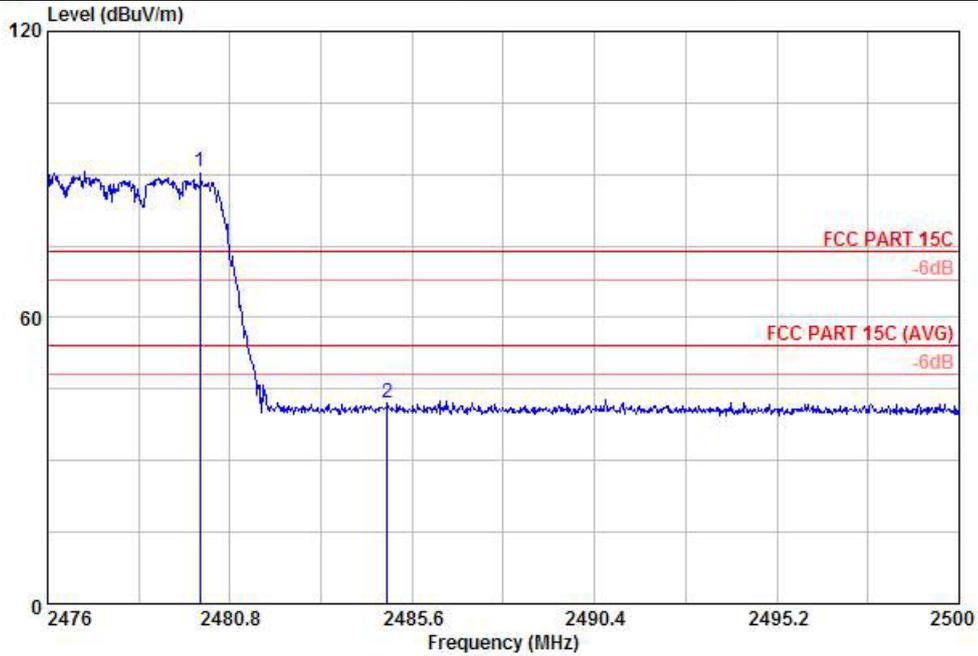

Site : 03CH01-KS
 Condition: FCC PART 15C 3m HF ANI-100803 VERTICAL

Mode : mode 3
 Plane : E2

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 X	2480.00	90.65	16.65	74.00	88.16	33.01	3.68	34.20	102	280	Peak
2	2484.95	42.22	-31.78	74.00	39.73	33.01	3.68	34.20	120	0	Peak


* Marker-Delta Method (RBW/VBW=100KHz): 48.43 dB , Hopping Mode



3.6.6 Test Result of Conducted Band Edges


Test Mode :	Mode 4 and 6	Temperature :	23~24°C
Test Channel :	00 and 78	Relative Humidity :	47~48%
		Test Engineer :	Zhi Lu

Low Band Edge Plot on Channel 00

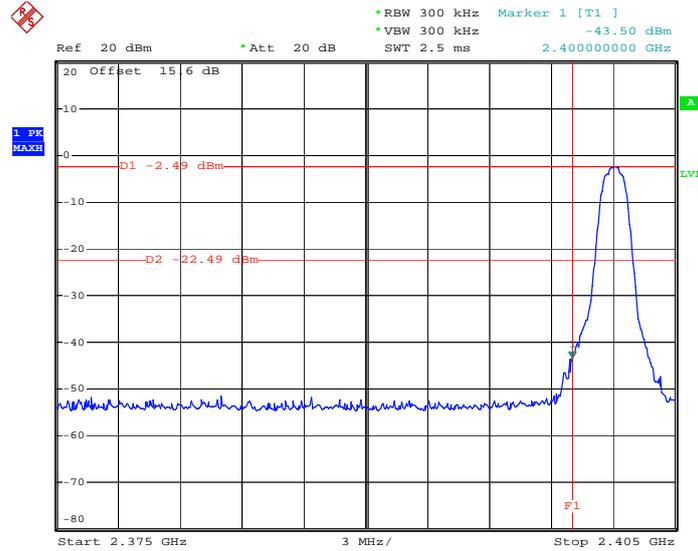

Date: 29.MAY.2012 04:54:32

High Band Edge Plot on Channel 78

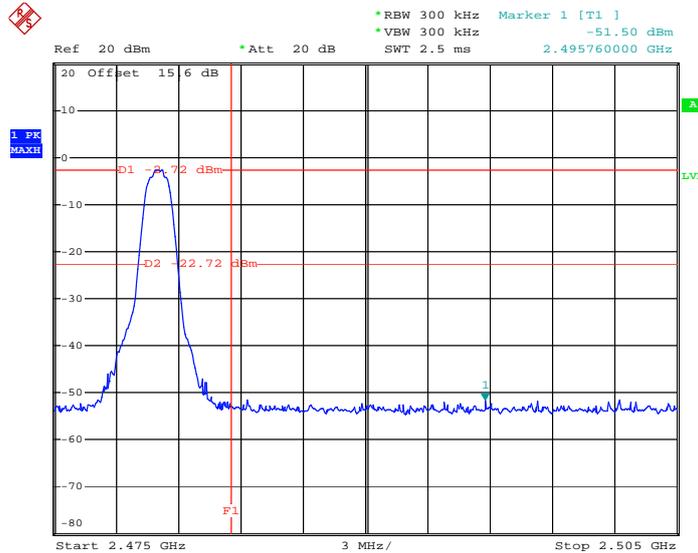

Date: 29.MAY.2012 04:55:43

3.7 Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

3.7.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW) \geq RBW, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

3.7.4 Test Setup

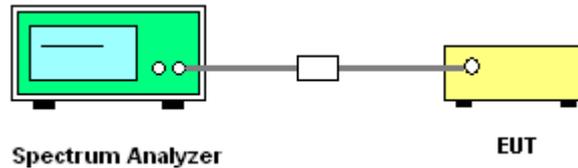




3.7.5 Test Result


Test Mode :	Mode 4	Temperature :	23~24°C
Test Channel :	00	Relative Humidity :	47~48%
		Test Engineer :	Zhi Lu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

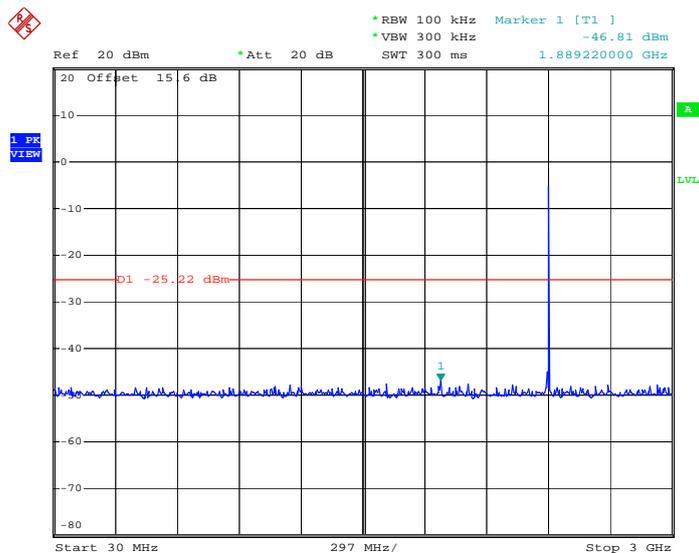

Date: 30.MAY.2012 09:58:03

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

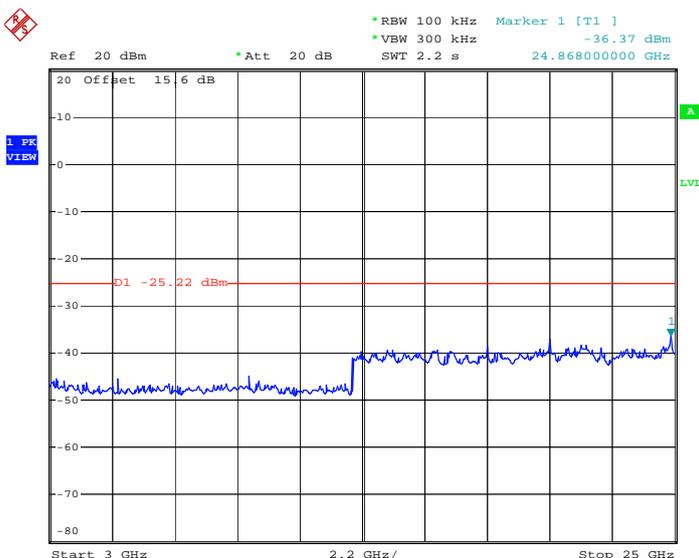


Date: 30.MAY.2012 09:58:25




Test Mode :	Mode 5	Temperature :	23~24°C
Test Channel :	39	Relative Humidity :	47~48%
		Test Engineer :	Zhi Lu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

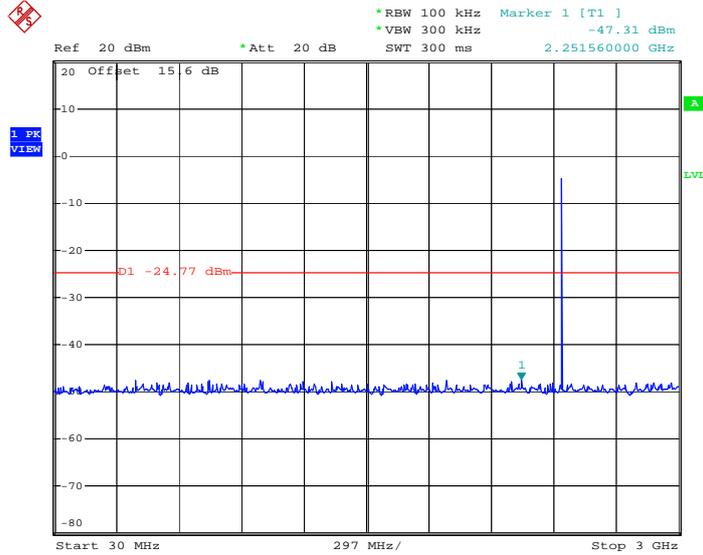

Date: 30.MAY.2012 10:00:18

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

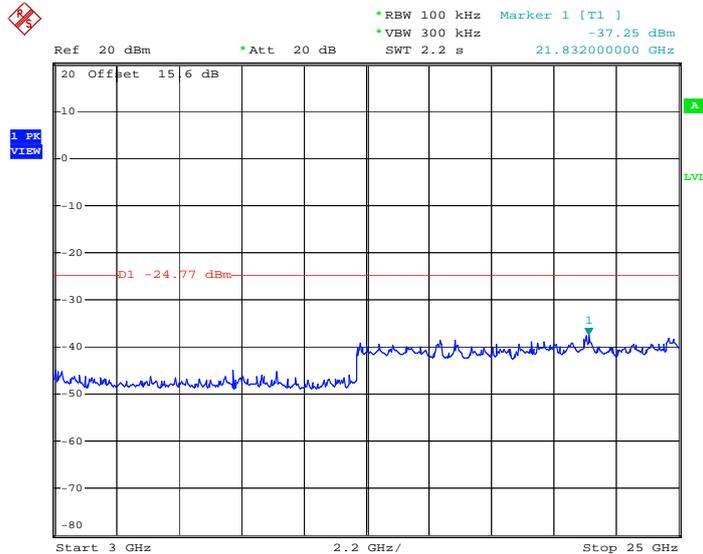


Date: 30.MAY.2012 10:00:40




Test Mode :	Mode 6	Temperature :	23~24°C
Test Channel :	78	Relative Humidity :	47~48%
		Test Engineer :	Zhi Lu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

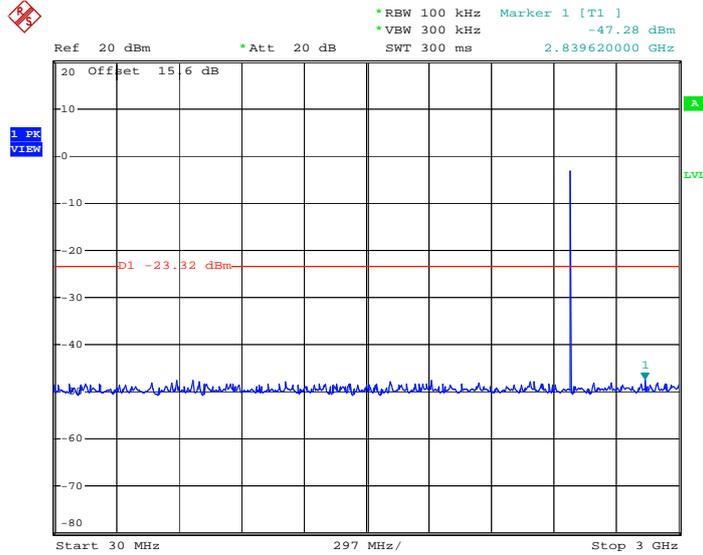

Date: 30.MAY.2012 10:01:26

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

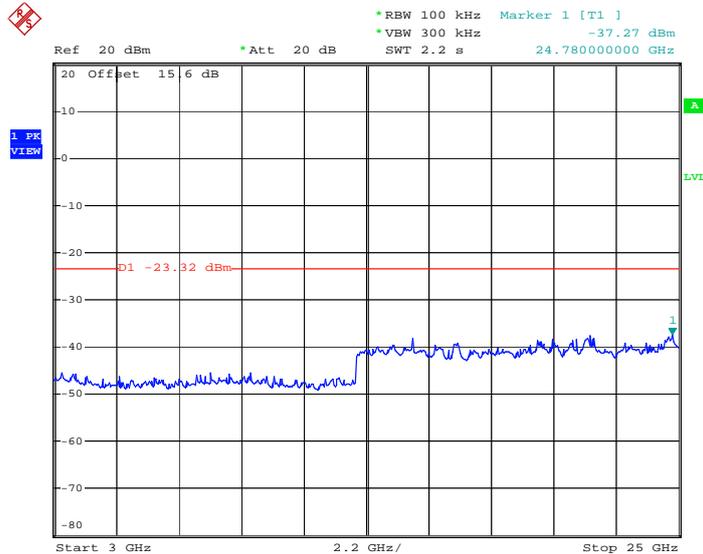

Date: 30.MAY.2012 10:01:48

3.8 AC Conducted Emission Measurement

3.8.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.8.2 Measuring Instruments

See list of measuring instruments of this test report.


3.8.3 Test Procedures

1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.



3.8.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	CDMA2000 BC0 Idle + Bluetooth Link + WLAN Link + Adapter + Camera		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

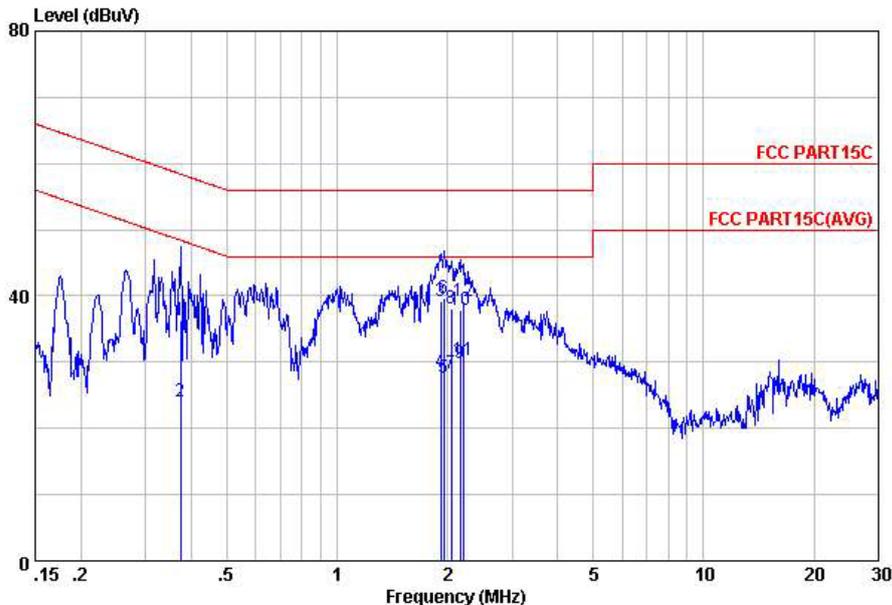


Site : C001-KS
 Condition: FCC PART15C LISN-100807 LINE

mode : Mode 1
 IMEI : A100002311B78A

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.37	36.41	-22.02	58.43	26.30	-0.08	10.19	QP
2	0.37	24.01	-24.42	48.43	13.90	-0.08	10.19	Average
3	1.92	39.32	-16.68	56.00	29.11	-0.11	10.32	QP
4	1.92	28.52	-17.48	46.00	18.31	-0.11	10.32	Average
5	1.96	27.72	-18.28	46.00	17.50	-0.11	10.33	Average
6	1.96	39.62	-16.38	56.00	29.40	-0.11	10.33	QP
7	2.04	28.22	-17.78	46.00	18.00	-0.11	10.33	Average
8	2.04	38.02	-17.98	56.00	27.80	-0.11	10.33	QP
9	2.17	29.93	-16.07	46.00	19.70	-0.11	10.34	Average
10	2.17	37.93	-18.07	56.00	27.70	-0.11	10.34	QP
11	2.21	30.23	-15.77	46.00	20.00	-0.11	10.34	Average
12	2.21	39.33	-16.67	56.00	29.10	-0.11	10.34	QP



Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	CDMA2000 BC0 Idle + Bluetooth Link + WLAN Link + Adapter + Camera		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

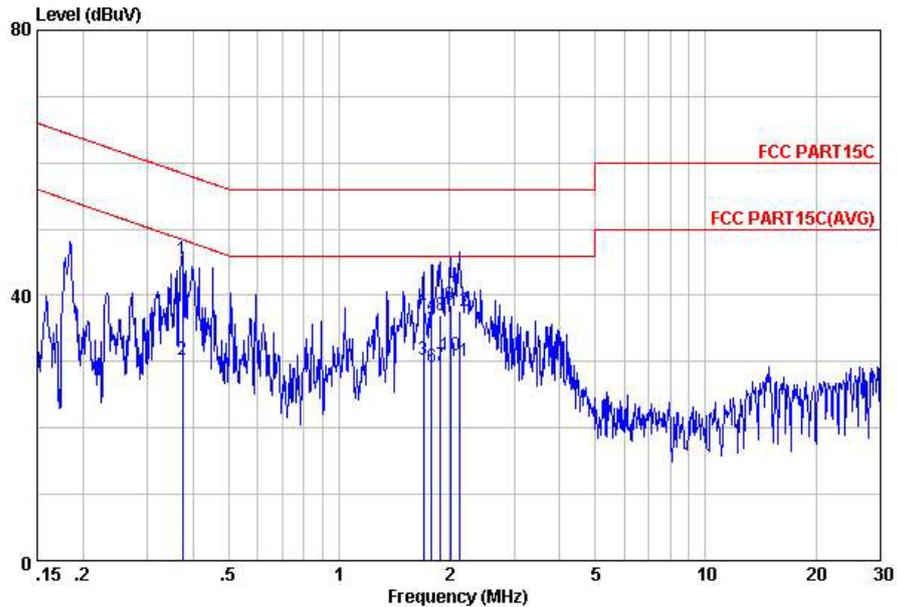

Site : C001-KS
 Condition: FCC PART15C LISN-100807 NEUTRAL

mode : Mode 1
 IMEI : A100002311B78A

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.37	45.41	-13.02	58.43	35.30	-0.08	10.19	QP
2	0.37	30.41	-18.02	48.43	20.30	-0.08	10.19	Average
3	1.70	30.41	-15.59	46.00	20.21	-0.11	10.31	Average
4	1.70	38.01	-17.99	56.00	27.81	-0.11	10.31	QP
5	1.79	36.31	-19.69	56.00	26.10	-0.11	10.32	QP
6	1.79	29.11	-16.89	46.00	18.90	-0.11	10.32	Average
7	1.89	29.51	-16.49	46.00	19.30	-0.11	10.32	Average
8	1.89	37.01	-18.99	56.00	26.80	-0.11	10.32	QP
9	2.01	38.52	-17.48	56.00	28.30	-0.11	10.33	QP
10	2.01	31.02	-14.98	46.00	20.80	-0.11	10.33	Average
11	2.13	30.13	-15.87	46.00	19.90	-0.11	10.34	Average
12	2.13	37.73	-18.27	56.00	27.50	-0.11	10.34	QP

3.9 Radiated Emission Measurement

3.9.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.9.2 Measuring Instruments


See list of measuring instruments of this test report.

3.9.3 Test Procedures


1. The testing follows the guidelines in FCC Public Notice DA 00-705 Measurement Guidelines.
2. Use the following spectrum analyzer settings:
 - (1) Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
 - (2) Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.
 Distance extrapolation factor = $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$ (dB)
3. Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.
4. Measured average value for the peak value is greater than 54 dBuV/m

3.9.4 Test Setup


For radiated emissions below 30MHz

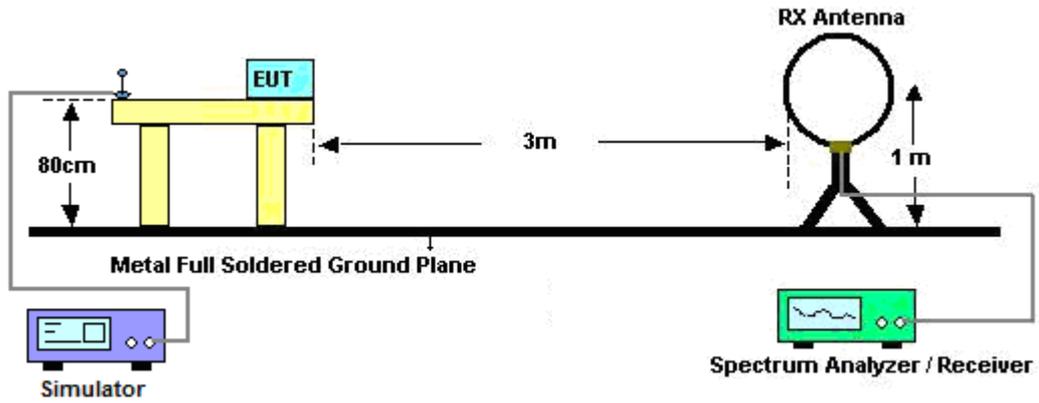

For radiated emissions from 30MHz to 1GHz

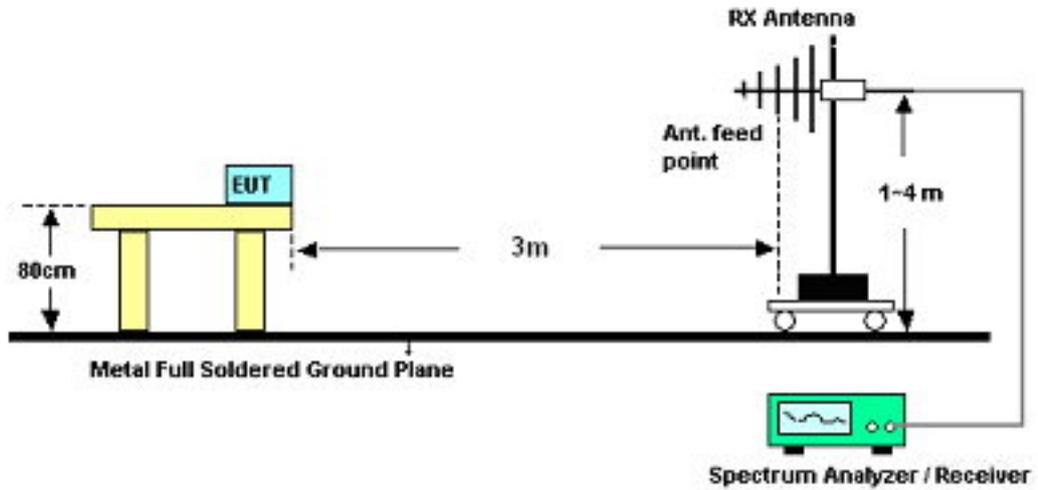

For radiated emissions above 1GHz

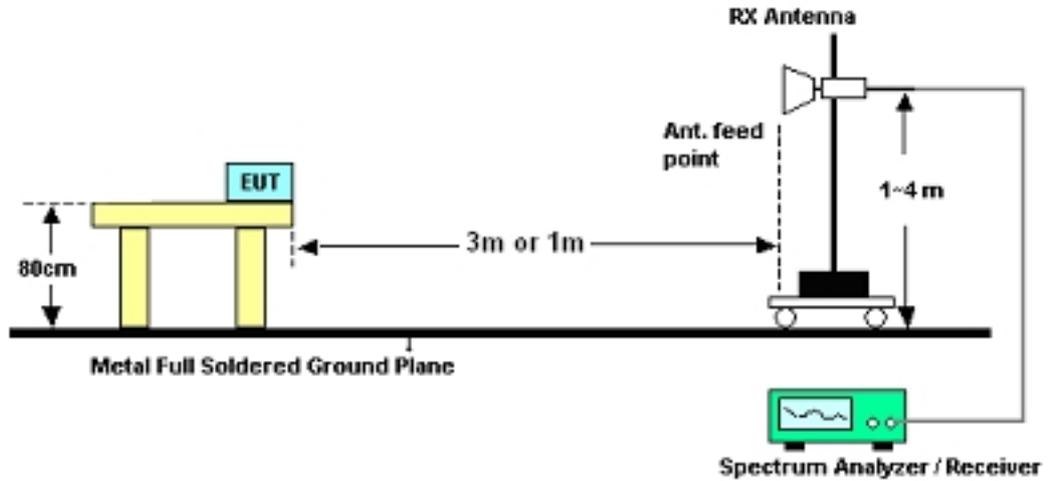

3.9.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	Steven Hao	Temperature :	23~25°C	
		Relative Humidity :	43~45%	
Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.



3.9.6 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	Mode 1	Temperature :	23~25°C
Test Channel :	00	Relative Humidity :	43~45%
Test Engineer :	Steven Hao	Polarization :	Horizontal
Remark :	2402 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	24.25	-15.75	40	36.07	18	0.26	30.08	-	-	Peak
46.49	24.67	-15.33	40	45.65	8.88	0.27	30.13	-	-	Peak
475.23	24.7	-21.3	46	36.78	16.75	0.93	29.76	-	-	Peak
652.74	23.55	-22.45	46	33.19	18.92	1.09	29.65	-	-	Peak
851.59	28.69	-17.31	46	36.56	20.51	1.28	29.66	-	-	Peak
946.65	32.55	-13.45	46	40.04	20.72	1.33	29.54	102	35	Peak
2386.95	47.36	-26.64	74	45.08	32.86	3.47	34.05	200	314	Peak
2386.95	34.79	-19.21	54	32.51	32.86	3.47	34.05	200	314	Average
2402	92.03	-	-	89.75	32.86	3.47	34.05	101	64	Peak
2402	76.8	-	-	74.52	32.86	3.47	34.05	101	64	Average
2491.07	47.77	-26.23	74	45.23	33.05	3.72	34.23	177	300	Peak
2491.07	35.56	-18.44	54	33.02	33.05	3.72	34.23	177	300	Average



Test Mode :	Mode 1	Temperature :	23~25°C
Test Channel :	00	Relative Humidity :	43~45%
Test Engineer :	Steven Hao	Polarization :	Vertical
Remark :	2402 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
36.79	26.92	-13.08	40	42.56	14.19	0.24	30.07	-	-	Peak
82.38	30.46	-9.54	40	52.98	7.15	0.36	30.03	152	337	Peak
161.92	25.19	-18.31	43.5	45.06	9.53	0.53	29.93	-	-	Peak
516.94	24.81	-21.19	46	35.98	17.58	0.97	29.72	-	-	Peak
902.03	32.29	-13.71	46	40.01	20.46	1.3	29.48	-	-	Peak
943.74	32.66	-13.34	46	40.15	20.71	1.33	29.53	-	-	Peak
2380.49	47.98	-26.02	74	45.74	32.83	3.42	34.01	112	76	Peak
2380.49	35.96	-18.04	54	33.72	32.83	3.42	34.01	112	76	Average
2402	93.03	-	-	90.75	32.86	3.47	34.05	100	279	Peak
2402	78.33	-	-	76.05	32.86	3.47	34.05	100	279	Average
2490.88	47.84	-26.16	74	45.3	33.05	3.72	34.23	142	274	Peak
2490.88	34.95	-19.05	54	32.41	33.05	3.72	34.23	142	274	Average



Test Mode :	Mode 2	Temperature :	23~25°C
Test Channel :	39	Relative Humidity :	43~45%
Test Engineer :	Steven Hao	Polarization :	Horizontal
Remark :	2441 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	24.68	-15.32	40	36.5	18	0.26	30.08	-	-	Peak
45.52	25.6	-14.4	40	46.21	9.25	0.27	30.13	-	-	Peak
468.44	23.25	-22.75	46	35.51	16.59	0.92	29.77	-	-	Peak
828.31	27.09	-18.91	46	35.21	20.24	1.27	29.63	-	-	Peak
863.23	28.72	-17.28	46	36.56	20.5	1.28	29.62	-	-	Peak
946.65	32.64	-13.36	46	40.13	20.72	1.33	29.54	100	0	Peak
2335.08	47.91	-26.09	74	45.74	32.78	3.33	33.94	112	205	Peak
2335.08	35.43	-18.57	54	33.26	32.78	3.33	33.94	112	205	Average
2441	91.71	-	-	89.31	32.95	3.6	34.15	101	87	Peak
2441	77.13	-	-	74.73	32.95	3.6	34.15	101	87	Average
2487.65	47.55	-26.45	74	45.01	33.05	3.72	34.23	173	222	Peak
2487.65	35.58	-18.42	54	33.04	33.05	3.72	34.23	173	222	Average



Test Mode :	Mode 2	Temperature :	23~25°C
Test Channel :	39	Relative Humidity :	43~45%
Test Engineer :	Steven Hao	Polarization :	Vertical
Remark :	2441 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
36.79	28.94	-11.06	40	44.58	14.19	0.24	30.07	-	-	Peak
82.38	29.93	-10.07	40	52.45	7.15	0.36	30.03	199	348	Peak
158.04	24.45	-19.05	43.5	44.2	9.67	0.53	29.95	-	-	Peak
652.74	24.49	-21.51	46	34.13	18.92	1.09	29.65	-	-	Peak
878.75	26.18	-19.82	46	33.97	20.47	1.29	29.55	-	-	Peak
941.8	31.87	-14.13	46	39.37	20.7	1.33	29.53	-	-	Peak
2326.53	47.42	-26.58	74	45.29	32.76	3.27	33.9	200	37	Peak
2326.53	35.35	-18.65	54	33.22	32.76	3.27	33.9	200	37	Average
2441	92.18	-	-	89.78	32.95	3.6	34.15	102	278	Peak
2441	78.06	-	-	75.66	32.95	3.6	34.15	102	278	Average
2498.48	47.96	-26.04	74	45.42	33.05	3.72	34.23	143	304	Peak
2498.48	35.71	-18.29	54	33.17	33.05	3.72	34.23	143	304	Average



Test Mode :	Mode 3	Temperature :	23~25°C
Test Channel :	78	Relative Humidity :	43~45%
Test Engineer :	Steven Hao	Polarization :	Horizontal
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	25.02	-14.98	40	36.84	18	0.26	30.08	-	-	Peak
45.52	25.35	-14.65	40	45.96	9.25	0.27	30.13	-	-	Peak
90.14	26.34	-17.16	43.5	47.04	8.9	0.39	29.99	-	-	Peak
631.4	24.9	-21.1	46	34.66	18.8	1.08	29.64	-	-	Peak
852.56	28.44	-17.56	46	36.3	20.51	1.28	29.65	-	-	Peak
935.98	33.97	-12.03	46	41.51	20.67	1.32	29.53	152	273	Peak
2380	46.95	-27.05	74	44.71	32.83	3.42	34.01	155	209	Peak
2380	33.73	-20.27	54	31.49	32.83	3.42	34.01	155	209	Average
2480	89.82	-	-	87.33	33.01	3.68	34.2	101	274	Peak
2480	76.1	-	-	73.61	33.01	3.68	34.2	101	274	Average
2483.5	43.34	-30.66	74	40.85	33.01	3.68	34.2	162	334	Peak
2483.5	31.06	-22.94	54	28.57	33.01	3.68	34.2	162	334	Average



Test Mode :	Mode 3	Temperature :	23~25°C
Test Channel :	78	Relative Humidity :	43~45%
Test Engineer :	Steven Hao	Polarization :	Vertical
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
36.79	27.48	-12.52	40	43.12	14.19	0.24	30.07	-	-	Peak
82.38	29.13	-10.87	40	51.65	7.15	0.36	30.03	200	0	Peak
161.92	24.46	-19.04	43.5	44.33	9.53	0.53	29.93	-	-	Peak
531.49	24.98	-21.02	46	35.61	18.08	0.99	29.7	-	-	Peak
878.75	26.28	-19.72	46	34.07	20.47	1.29	29.55	-	-	Peak
935.98	33.21	-12.79	46	40.75	20.67	1.32	29.53	-	-	Peak
2384	46.59	-27.41	74	44.35	32.83	3.42	34.01	171	42	Peak
2384	34.42	-19.58	54	32.18	32.83	3.42	34.01	171	42	Average
2480	91.34	-	-	88.85	33.01	3.68	34.2	100	277	Peak
2480	76.98	-	-	74.49	33.01	3.68	34.2	100	277	Average
2484.424	41.99	-32.01	74	39.5	33.01	3.68	34.2	117	206	Peak
2484.424	28.86	-25.14	54	26.37	33.01	3.68	34.2	117	206	Average



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Connected Construction

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	May 18, 2012 ~ May 30, 2012	Dec. 29, 2012	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	N/A	Dec. 30, 2011	May 18, 2012 ~ May 30, 2012	Dec. 29, 2012	Conducted (TH01-KS)
DC Power supply	GWINSTEK	GPS-3030D	E1884515	N/A	Aug. 23, 2011	May 18, 2012 ~ May 30, 2012	Aug. 22, 2012	Conducted (TH01-KS)
Bluetooth Base Station	R&S	CBT	100783	N/A	Aug. 18, 2011	May 18, 2012 ~ May 30, 2012	Aug. 17, 2012	Conducted (TH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	Jun. 02, 2011	May 14, 2012	Jun. 01, 2012	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Dec. 30, 2011	May 14, 2012	Dec. 29, 2012	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Dec. 30, 2011	May 14, 2012	Dec. 29, 2012	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	N/A	Nov. 16, 2011	May 14, 2012	Nov. 15, 2012	Conduction (CO01-KS)
System Simulator	R&S	CMU200	837587/066	Full-Band	Dec. 30, 2011	May 14, 2012	Dec. 29, 2012	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 09, 2011	May 29, 2012	Nov. 08, 2012	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	May 29, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 08, 2011	May 29, 2012	Dec. 07, 2012	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	00075959	1GHz~18GHz	Jan. 06, 2012	May 29, 2012	Jan. 05, 2013	Radiation (03CH01-KS)
Amplifier	Wireless	FPA-6592G	060004	30MHz~2GHz	Dec. 30, 2011	May 29, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Dec. 30, 2011	May 29, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701023	1GHz~18GHz	Nov. 07, 2011	May 29, 2012	Nov. 06, 2012	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Oct. 11, 2011	May 29, 2012	Oct.10, 2012	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	Jul. 28, 2011	May 29, 2012	Jul. 27, 2012	Radiation (03CH01-KS)
Bluetooth Base Station	R&S	CBT	100783	N/A	Aug. 18, 2011	May 29, 2012	Aug. 17, 2012	Radiation (03CH01-KS)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
Combined Standard Uncertainty $U_c(y)$	1.13		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26		

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	±0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	±1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	±0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site Imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				



Appendix A. Photographs of EUT

Please refer to Sporton report number EP241902 as below.