

# FCC RADIO TEST REPORT

47 CFR FCC Part 15 Subpart C § 15.225

**Equipment** : CDMA/LTE Digital Mobile Handset  
**Brand Name** : ZTE  
**Model No.** : ZTE N9100/ZTE Aurora  
**Filing Type** : New Application  
**Applicant** : ZTE CORPORATION  
ZTE Plaza, Keji Road South, Hi-Tech, Industrial  
Park, Nanshan District, Shenzhen, Guangdong,  
518057, P.R.China  
**FCC ID** : Q78-ZTEN9100  
**Manufacturer** : ZTE CORPORATION  
ZTE Plaza, Keji Road South, Hi-Tech, Industrial  
Park, Nanshan District, Shenzhen, Guangdong,  
518057, P.R.China  
**Received Date** : Aug. 17, 2012  
**Final Test Date** : Aug. 30, 2012

## Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



***SPORTON International (Kunshan) Inc.***

*No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.*

**Table of Contents**

**1. SUMMARY OF THE TEST RESULT .....1**

**2. GENERAL INFORMATION.....3**

    2.1 Product Details.....3

    2.2 Accessories.....3

    2.3 Table for Test Modes.....3

    2.4 Table for Testing Locations.....3

    2.5 Table for Supporting Units.....3

    2.6 Test Configurations.....4

**3. TEST RESULT .....5**

    3.1 AC Power Line Conducted Emissions Measurement .....5

    3.2 Field Strength of Fundamental Emissions and Mask Measurement.....9

    3.3 20dB Spectrum Bandwidth Measurement .....12

    3.4 Radiated Emissions Measurement .....14

    3.5 Frequency Stability Measurement .....19

    3.6 Antenna Requirements .....21

**4. LIST OF MEASURING EQUIPMENTS.....22**

**5. TEST LOCATION.....23**

**6. TAF CERTIFICATE OF ACCREDITATION.....24**

**APPENDIX A. PHOTOGRAPHS OF EUT ..... A1 ~ A30**

**APPENDIX B. TEST PHOTOS. .... B1 ~ B2**

### History of This Test Report

Original Issue Date: Sep. 28, 2012

Report No.: FR281701D

No additional attachment.

Additional attachment were issued as following record:

Attachment No.	Issue Date	Description
		15.205(a) 15.209(a)

# CERTIFICATE OF COMPLIANCE

47 CFR FCC Part 15 Subpart C § 15.225

**Equipment** : CDMA/LTE Digital Mobile Handset

**Brand Name** : ZTE

**Model No.** : ZTE N9100/ZTE Aurora

**Applicant** : ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial  
Park, Nanshan District, Shenzhen, Guangdong,  
518057, P.R.China

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Aug. 17, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



\_\_\_\_\_  
Jones Tsai / Manager

***SPORTON International (Kunshan) Inc.***

*No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.*

**1. SUMMARY OF THE TEST RESULT**

<b>Applied Standard: 47 CFR FCC Part 15 Subpart C</b>				
<b>Part</b>	<b>Rule Section</b>	<b>Description of Test</b>	<b>Result</b>	<b>Under Limit</b>
3.1	15.207	AC Power Line Conducted Emissions	Complies	-3.57dB at 46.43MHz
3.2	15.225(a)	Field Strength of Fundamental Emissions	Complies	-71.94dB at 13.56MHz
3.3	15.215(c)	20dB Spectrum Bandwidth	Complies	
3.4	15.225(d)	Radiated Emissions	Complies	-5.90dB at 39.70MHz
3.5	15.225(e)	Frequency Stability	Complies	
3.6	15.203	Antenna Requirements	Complies	

<b>Test Items</b>	<b>Uncertainty</b>	<b>Remark</b>
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Field Strength of Fundamental Emissions	±0.8dB	Confidence levels of 95%
20dB Spectrum Bandwidth / Frequency Stability	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated / Band Edge Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7℃	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

## 2. GENERAL INFORMATION

### 2.1 Product Details

For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Power Type	5Vdc from Adapter 3.8Vdc from Li-ion Battery
Modulation	ASK
Channel Number	1
Channel Band Width (99%)	2.280kHz
Max. Field Strength	52.06dBuV/m
Test Freq. Range	13.553 ~ 13.567MHz
Carrier Frequencies	13.56 MHz (Ch. 1)
Antenna	Integrate Antenna (Without any antenna connector)

### 2.2 Accessories

### 2.3 Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel
AC Power Line Conducted Emissions	CTX	-
Field Strength of Fundamental Emissions	CTX	1
20dB Spectrum Bandwidth	CTX	1
Radiated Emissions 9kHz~30MHz	CTX	1
Radiated Emissions 9kHz~10 <sup>th</sup> Harmonic Band Edge Emissions	CTX	1
Frequency Stability	Un-modulation	1

Note: CTX=continuously transmitting.

### 2.4 Table for Testing Locations

Test Site No.	Site Category	Location
CO01-KS	Conduction	Kun Shan
TH01-KS	OVEN Room	Kun Shan
03CH02-HY	SAC	Hwa Ya


Semi Anechoic Chamber (SAC).

### 2.5 Table for Supporting Units

Support Unit	Brand	Model	FCC ID
System Simulator	R&S	CMU 200	N/A
WLAN AP	D-link	DIR-855	KA2DIR855A2
Notebook	DELL	P08S	QDS-BRCM1030
Bluetooth Earphone	Nokia	BH-106	QTLBH-106
DC Power Supply	GWINSTEK	GPS-3030D	N/A


## 2.6 Test Configurations

### For conducted emissions

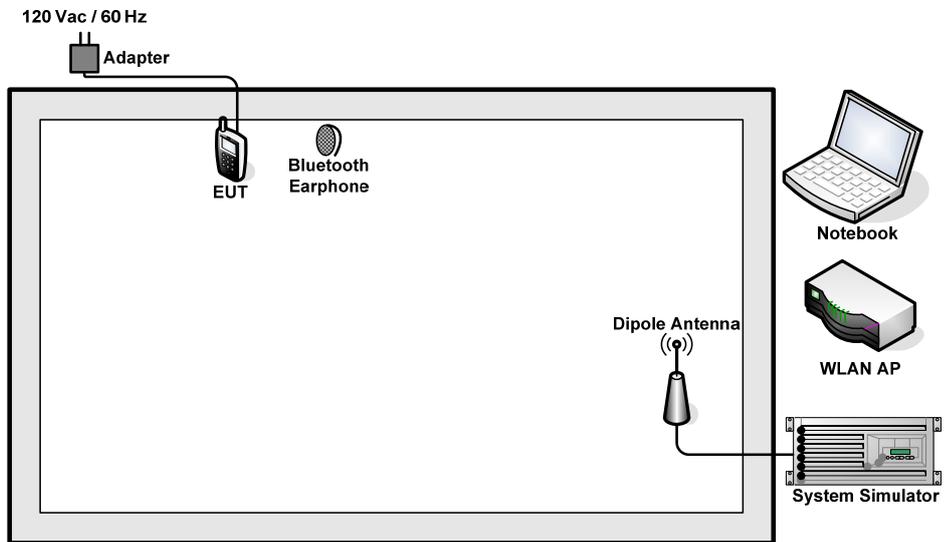

### Fundamental Emissions and Mask Measurement

For radiated emissions 9kHz~30MHz/  
For radiated emissions 30MHz~1GHz

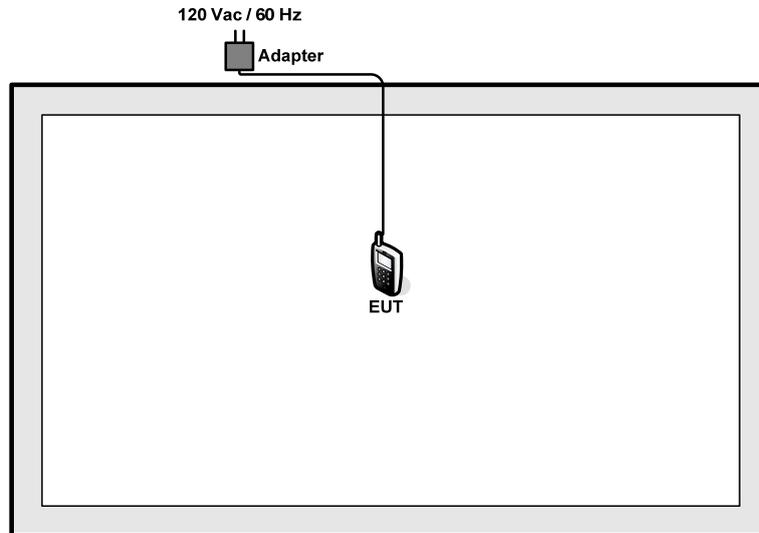

### 3. TEST RESULT

#### 3.1 AC Power Line Conducted Emissions Measurement

##### 3.1.1 Limit

For a Low-power Radio-frequency device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

##### 3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

##### 3.1.3 Test Procedures

1. The EUT warm up about 15 minutes then start test.
2. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The measurement has to be done between each power line and ground at the power terminal.

3.1.4 Test Setup Layout

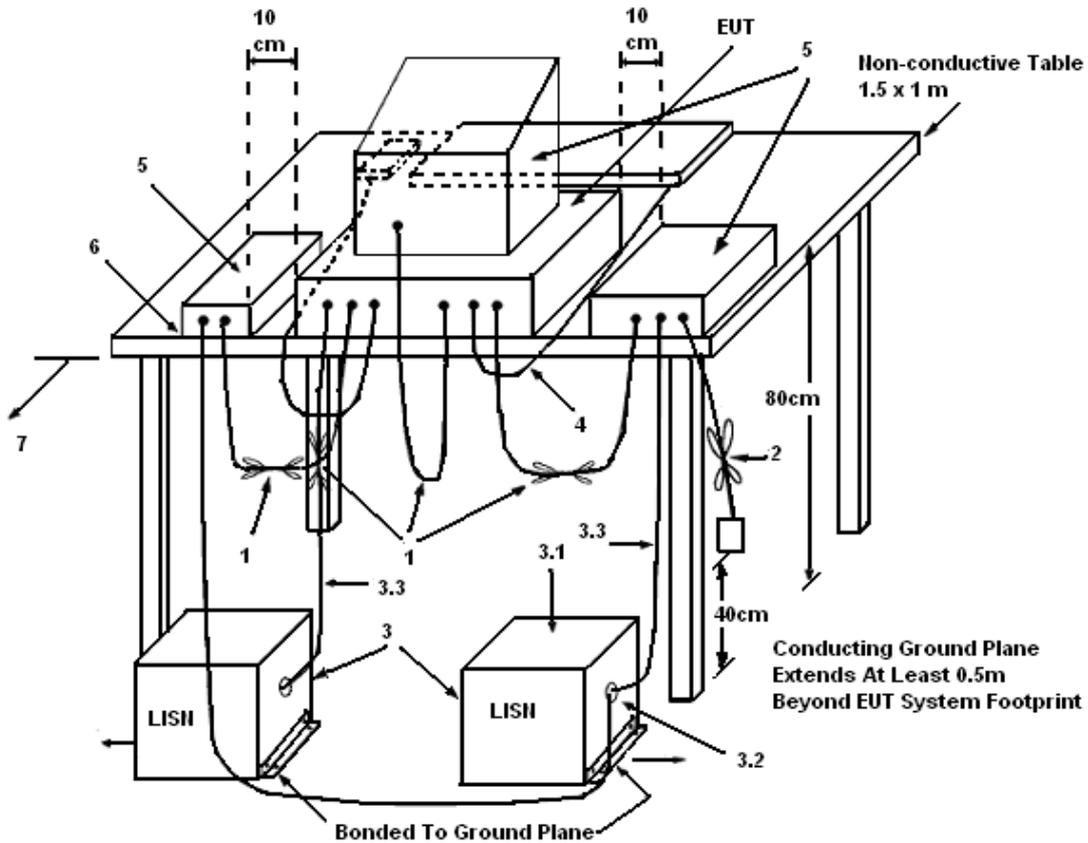

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5 Test Deviation

There is no deviation with the original standard.


3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in transmitting function.

3.1.7 Results of AC Power Line Conducted Emissions Measurement

<b>Final Test Date</b>	Aug. 20, 2012	<b>Test Site No.</b>	CO01-KS
<b>Temperature</b>	19~20°C	<b>Humidity</b>	39~40%
<b>Test Engineer</b>	Tom Wang	<b>Configuration</b>	Transmitting Mode (13.56MHz)
<b>Mode</b>	CDMA 2000 BC0 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + NFC Tx		


Line

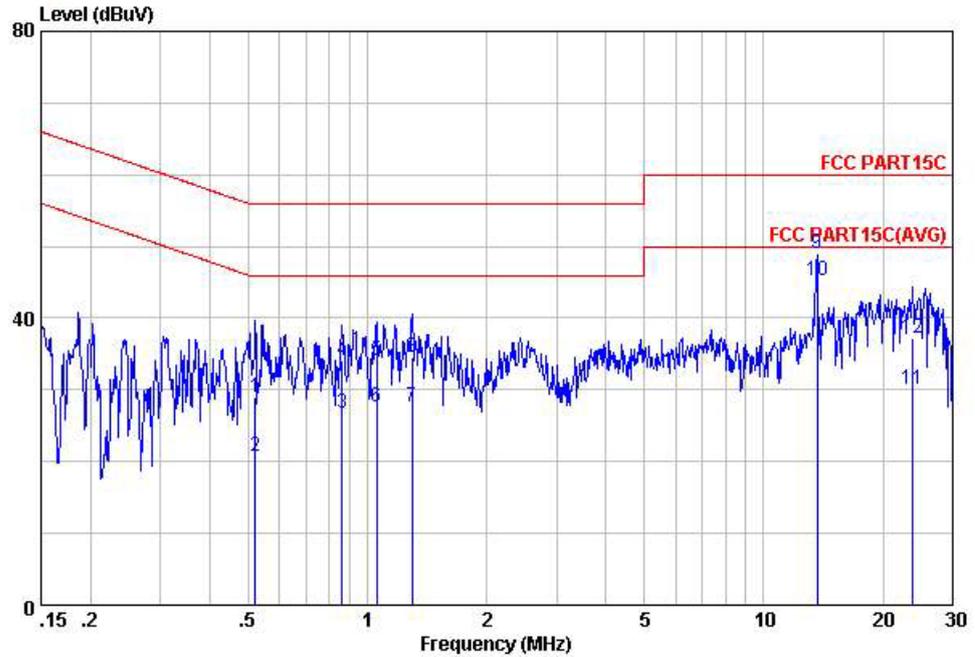

Site : CO01-KS  
 Condition: FCC PART15C LISN-111230 LINE  
 mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.52	28.94	-27.06	56.00	18.39	-0.08	10.63	QP
2	0.52	20.74	-25.26	46.00	10.19	-0.08	10.63	Average
3	0.86	26.85	-19.15	46.00	16.30	-0.10	10.65	Average
4	0.86	34.15	-21.85	56.00	23.60	-0.10	10.65	QP
5	1.05	34.05	-21.95	56.00	23.50	-0.10	10.65	QP
6	1.05	27.65	-18.35	46.00	17.10	-0.10	10.65	Average
7	1.30	27.66	-18.34	46.00	17.10	-0.10	10.66	Average
8	1.30	34.56	-21.44	56.00	24.00	-0.10	10.66	QP
9	13.62	49.13	-10.87	60.00	38.21	-0.06	10.98	QP
10	13.62	45.33	-4.67	50.00	34.41	-0.06	10.98	Average
11	23.76	30.16	-19.84	50.00	18.90	0.14	11.12	Average
12	23.76	37.26	-22.74	60.00	26.00	0.14	11.12	QP

Neutral

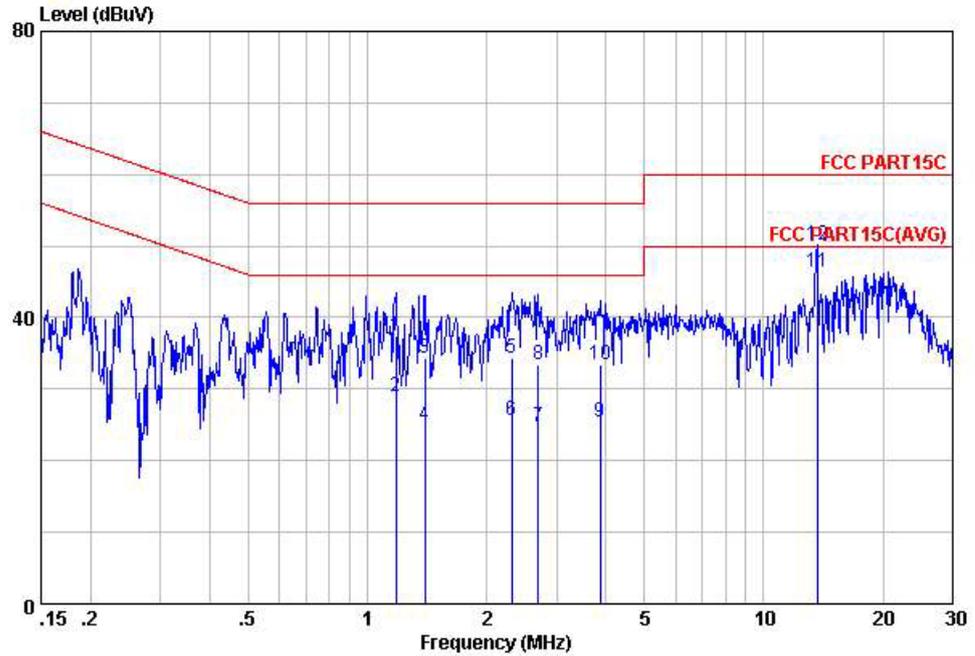

Site : C001-KS  
 Condition: FCC PART15C LISN-111230 NEUTRAL

mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	1.18	37.46	-18.54	56.00	26.89	-0.09	10.66	QP
2	1.18	29.06	-16.94	46.00	18.49	-0.09	10.66	Average
3	1.40	34.27	-21.73	56.00	23.70	-0.10	10.67	QP
4	1.40	24.87	-21.13	46.00	14.30	-0.10	10.67	Average
5	2.31	34.41	-21.59	56.00	23.80	-0.11	10.72	QP
6	2.31	25.61	-20.39	46.00	15.00	-0.11	10.72	Average
7	2.69	24.73	-21.27	46.00	14.09	-0.11	10.75	Average
8	2.69	33.53	-22.47	56.00	22.89	-0.11	10.75	QP
9	3.86	25.50	-20.50	46.00	14.80	-0.13	10.83	Average
10	3.86	33.40	-22.60	56.00	22.70	-0.13	10.83	QP
11	13.62	46.43	-3.57	50.00	35.52	-0.07	10.98	Average
12	13.62	50.13	-9.87	60.00	39.22	-0.07	10.98	QP

Note:  
 Level = Read Level + LISN Factor + Cable Loss.

**3.2 Field Strength of Fundamental Emissions and Mask Measurement**

**3.2.1 Limit**

Field strength of fundamental emissions limit:

The field strength of fundamental emissions shall not exceed 15848 micorvolts/meter at 30 meters. The emissions limit in this paragraph is based on measurement instrumentation employing a QP detector.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Field Strength (dBµV/m) at 10m	Field Strength (dBµV/m) at 3m
13.553 ~ 13.567MHz	15848 at 30m	103.08 (QP)	124 (QP)

Mask limit:

Rules and specifications		CFR 47 Part 15 section 15.225(a)-(d)			
Description	Compliance with the spectrum mask is tested using a spectrum analyzer with RB set to a 1kHz for the band 13.553~13.567MHz				
Limit	Freq. of Emission (MHz)	Field Strength (uV/m) at 30m	Field Strength (dBuV/m) at 30m	Field Strength (dBuV/m) at 10m	Field Strength (dBuV/m) at 3m
	1.705~13.110	30	29.5	48.58	69.5
	13.110~13.410	106	40.5	59.58	80.5
	13.410~13.553	334	50.5	69.58	90.5
	13.553~13.567	15848	84.0	103.08	124.0
	13.567~13.710	334	50.5	69.58	90.5
	13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5	

**3.2.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	Auto
Center Frequency	Fundamental Frequency
RB	9 kHz
Detector	QP

**3.2.3 Test Procedures**

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested using a spectrum analyzer with RB set to a 1kHz for the band 13.553~13.567MHz.

**3.2.4 Test Setup Layout**

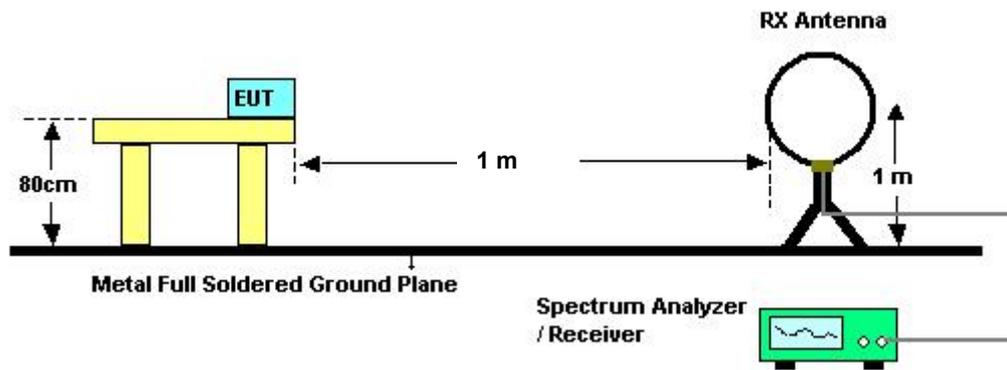

**3.2.5 Test Deviation**

There is no deviation with the original standard.


**3.2.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

3.2.7 Test Result of Field Strength of Fundamental Emissions

<b>Final Test Date</b>	Aug. 30, 2012	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	24.2°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Streak	<b>Configurations</b>	Ch. 1

Freq. (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m) at 1m	Remark
13.56 MHz	52.06	71.94	124.00	

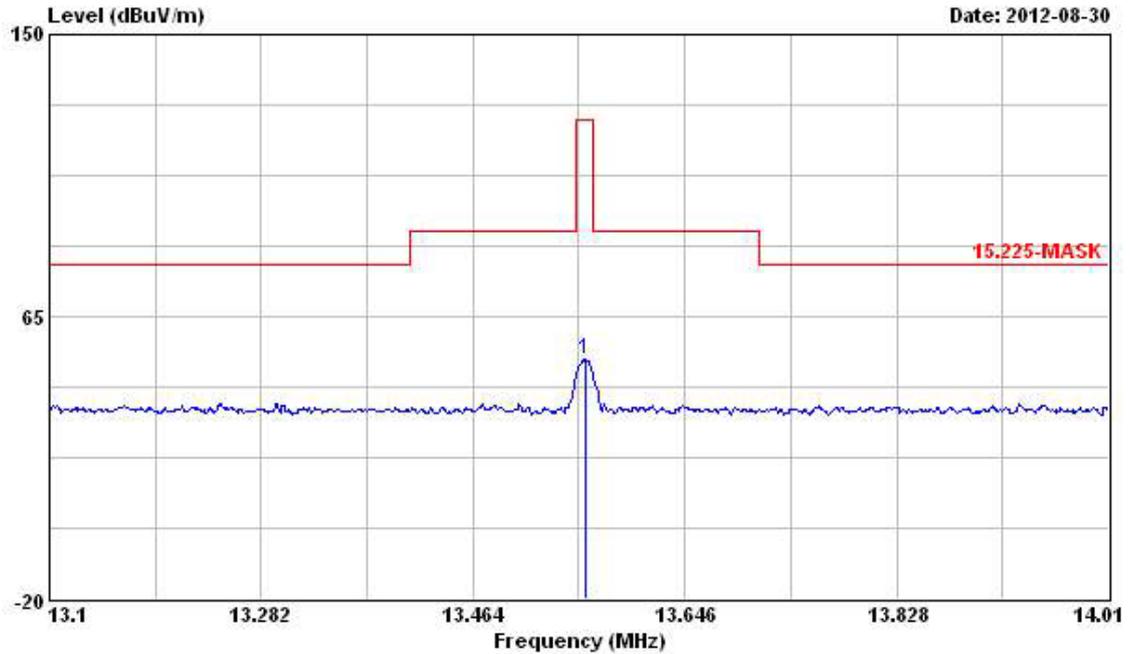

Site : 03CH02-HY  
 Condition : 15.225-MASK 3m LOOP ANTENNA HORIZONTAL  
 EUT : CDMA/LTE Multi-Mode Digital Mobile Phone  
 Power : 120V 60Hz

Memo : TX 13.56MHz  
 Memo : EUT = Transverse

Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		
1	13.560	52.06	-71.94	124.00	32.59	20.00	-0.53	0.00	Peak	---	---

Note:  
 Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 Measured distance is 1m and 10m extrapolation factor is 40 log (10/1) = 40dB  
 All emissions emit form non-NFC function of digital unintentional emissions. All NFC's spurious emissions are below 20dB of limits.

**3.3 20dB Spectrum Bandwidth Measurement**

**3.3.1 Limit**

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 ~ 13.567MHz).

**3.3.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

<b>Spectrum Parameters</b>	<b>Setting</b>
Attenuation	Auto
Span Frequency	> 20dB Bandwidth
RB	1 kHz
VB	1 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**3.3.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 1 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.

**3.3.4 Test Setup Layout**

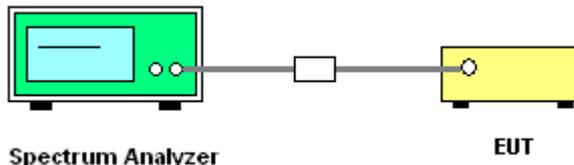

**3.3.5 Test Deviation**

There is no deviation with the original standard.

**3.3.6 EUT Operation during Test**


The EUT was programmed to be in continuously transmitting mode.

3.3.7 Test Result of 20dB Spectrum Bandwidth


<b>Final Test Date</b>	Aug. 22, 2012	<b>Test Site No.</b>	TH01-KS
<b>Temperature</b>	23~24°C	<b>Humidity</b>	47~48%
<b>Test Engineer</b>	Zhi Lu	<b>Configurations</b>	Ch. 1

Frequency	20dB BW (kHz)	99% OBW (kHz)	Frequency range (MHz) $f_L > 13.553\text{MHz}$	Frequency range (MHz) $f_H < 13.567\text{MHz}$	Test Result
13.56 MHz	2.640	2.280	13.55906	13.5617	Complies

20 dB / 99% Bandwidth Plot on 13.56 MHz

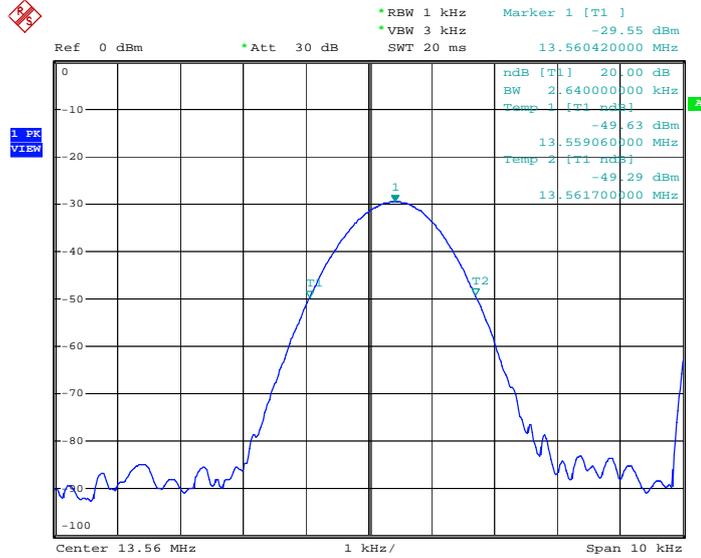

Date: 22.AUG.2012 15:52:07

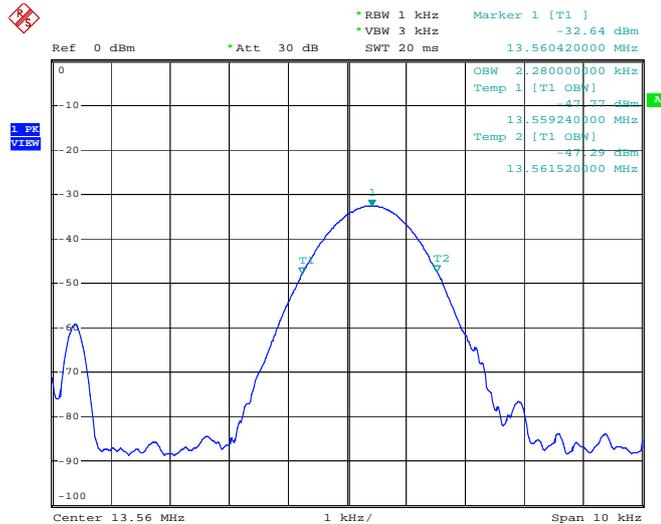

Date: 22.AUG.2012 15:51:30

**3.4 Radiated Emissions Measurement**

**3.4.1 Limit**

The field strength of any emissions which appear outside of 13.553 ~ 13.567MHz band shall not exceed the general radiated emissions limits in Section 15.209(a)

<b>Frequencies (MHz)</b>	<b>Field Strength (micровolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**3.4.2 Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of receiver.


<b>Receiver Parameter</b>	<b>Setting</b>
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

**3.4.3 Test Procedures**


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.4.4 Test Setup Layout

For radiated emissions below 30MHz

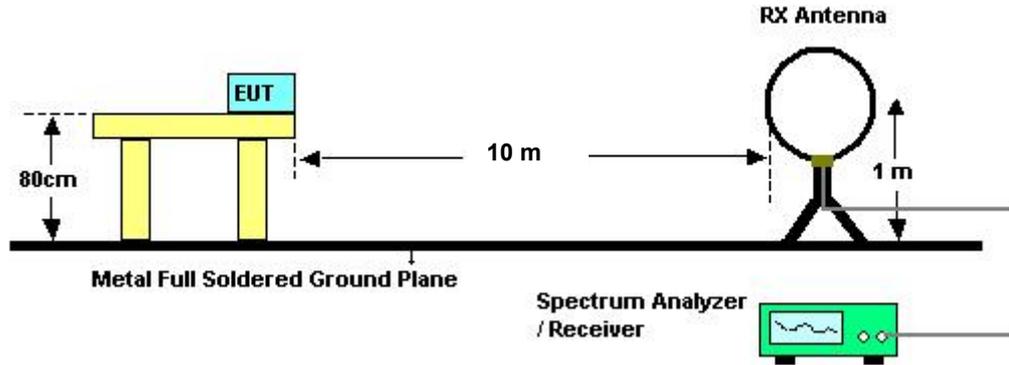

For radiated emissions above 30MHz

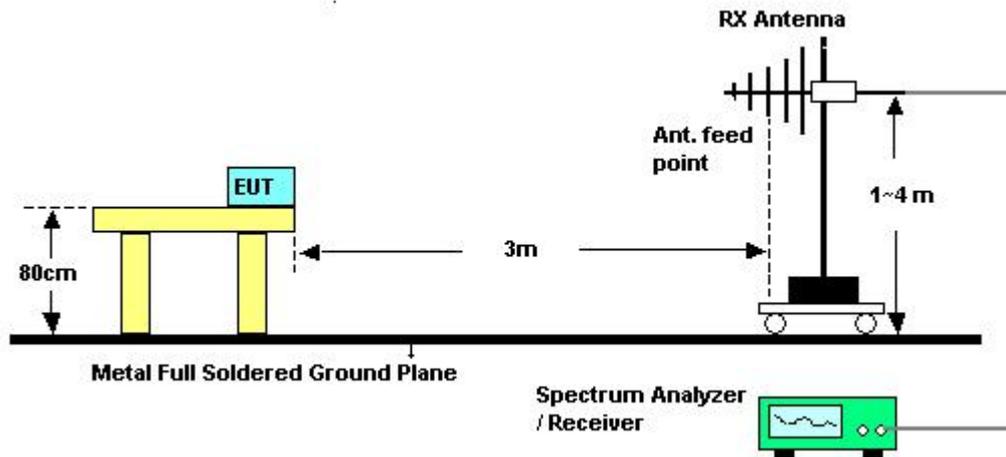

3.4.5 Test Deviation

There is no deviation with the original standard.

3.4.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


**3.4.7 Results of Radiated Emissions (9kHz~30MHz)**

Note: All spurious emissions (9kHz-30MHz) are below fundamental emissions field strength and the levels exceed the level of 20 dB below the applicable limit.

3.4.8 Results for Radiated Emissions (30MHz~1GHz)

Final Test Date	Aug. 30, 2012	Test Site No.	03CH02-HY
Temperature	24.2°C	Humidity	56%
Test Engineer	Streak	Configurations	Ch.1

Horizontal

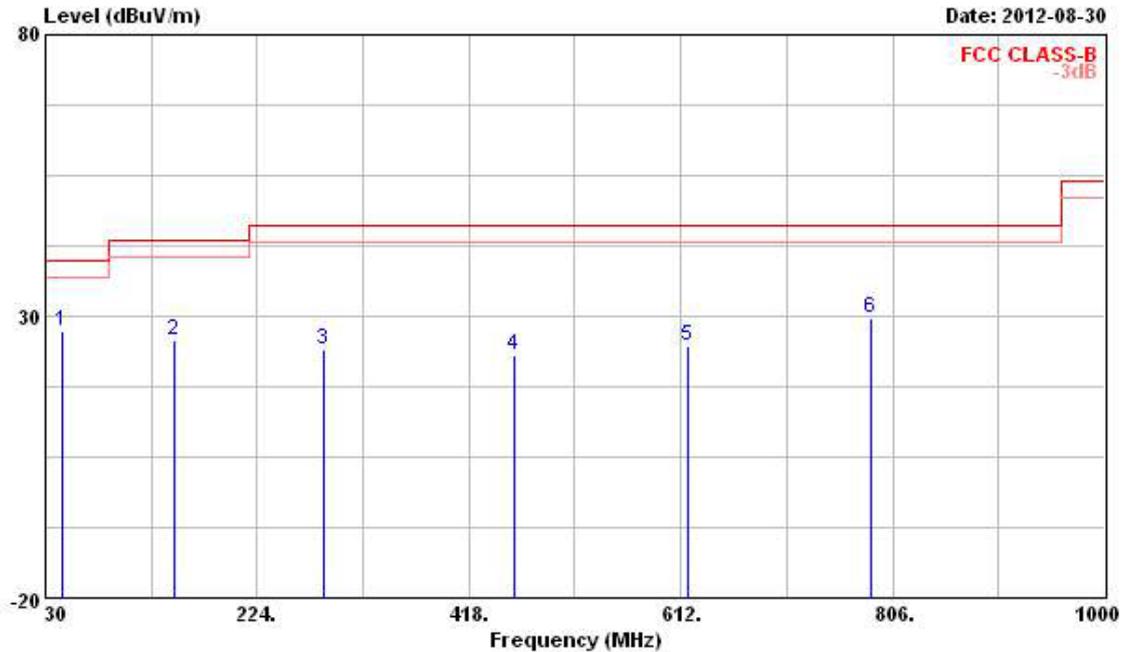


Site : 03CH02-HY  
 Condition : FCC CLASS-B 3m AT-2723 HORIZONTAL  
 EUT : CDMA/LTE Multi-Mode Digital Mobile Phone  
 Power : 120V 60Hz (Adapter Mode)

Memo : TX 13.56MHz  
 Memo : EUT = Transverse

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	44.550	27.22	-12.78	40.00	41.98	12.02	1.10	27.88	Peak	---	---
2	148.340	25.57	-17.93	43.50	40.29	10.90	2.02	27.64	Peak	---	---
3	284.140	23.93	-22.07	46.00	34.75	13.48	2.90	27.20	Peak	---	---
4	459.710	23.15	-22.85	46.00	31.23	16.47	3.62	28.17	Peak	---	---
5	618.790	24.60	-21.40	46.00	28.80	19.93	4.30	28.43	Peak	---	---
6	785.630	29.75	-16.25	46.00	32.84	20.06	4.84	27.99	Peak	---	---

Vertical

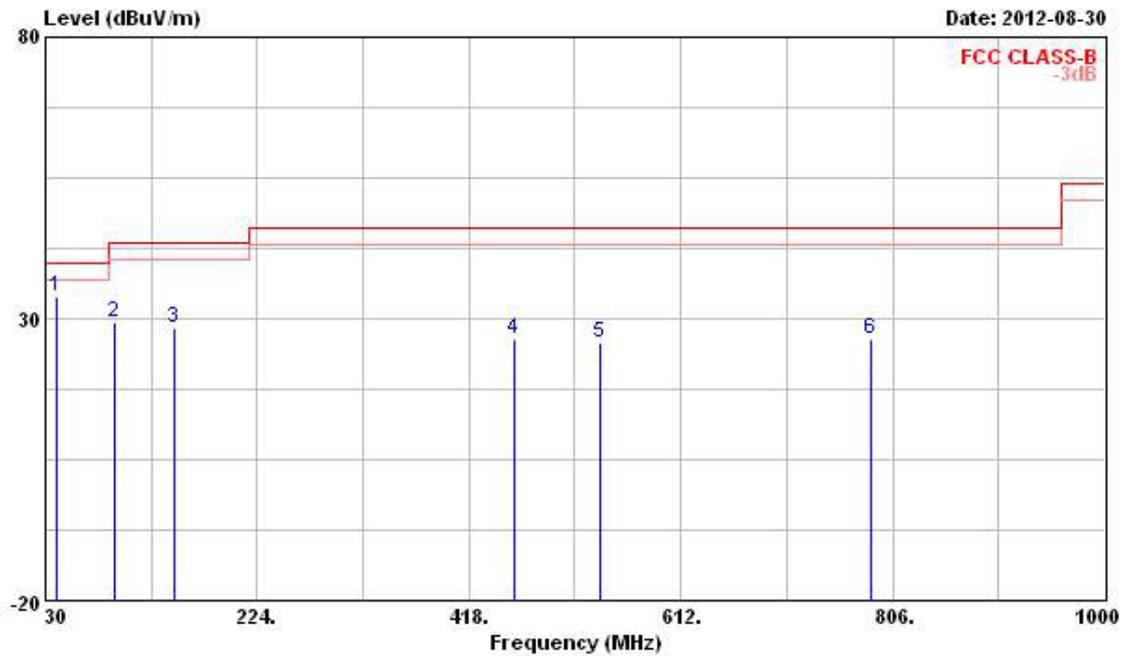

Site : 03CH02-HY  
 Condition : FCC CLASS-B 3m AT-2723 VERTICAL  
 EUT : CDMA/LTE Multi-Mode Digital Mobile Phone  
 Power : 120V 60Hz (Adapter Mode)

Memo : TX 13.56MHz  
 Memo : EUT = Transverse

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	39.700	34.10	-5.90	40.00	47.72	13.25	1.03	27.90	Peak	---	---
2	94.020	29.32	-14.18	43.50	45.41	10.17	1.59	27.85	Peak	---	---
3	148.340	28.20	-15.30	43.50	42.92	10.90	2.02	27.64	Peak	---	---
4	459.710	26.40	-19.60	46.00	34.48	16.47	3.62	28.17	Peak	---	---
5	537.310	25.86	-20.14	46.00	31.92	18.35	3.99	28.40	Peak	---	---
6	785.630	26.46	-19.54	46.00	29.55	20.06	4.84	27.99	Peak	---	---

Note:  
 The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.  
 Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**3.5 Frequency Stability Measurement**

**3.5.1 Limit**

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

**3.5.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

<b>Spectrum Parameter</b>	<b>Setting</b>
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	1 kHz
VB	1 kHz
Sweep Time	Auto

**3.5.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 1 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 100$ ppm.
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is -20°C~50°C.

**3.5.4 Test Setup Layout**

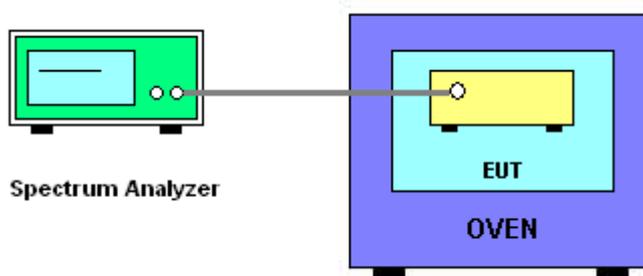

**3.5.5 Test Deviation**

There is no deviation with the original standard.

**3.5.6 EUT Operation during Test**

The EUT was programmed to be in continuously un-modulation transmitting mode.

**3.5.7 Test Result of Frequency Stability**

<b>Final Test Date</b>	Aug. 22, 2012	<b>Test Site No.</b>	TH01-KS
<b>Temperature</b>	23~24°C	<b>Humidity</b>	47~48%
<b>Test Engineer</b>	Zhi Lu	<b>Configurations</b>	Ch. 1

**Voltage vs. Frequency Stability**

<b>Voltage (V)</b>	<b>Measurement Frequency (MHz)</b>
	<b>13.56</b>
3.8	13.560420
3.6	13.560420
4.35	13.560420
Max. Deviation (MHz)	0.000420
Max. Deviation (ppm)	30.9735

**Temperature vs. Frequency Stability**

<b>Temperature (°C)</b>	<b>Measurement Frequency (MHz)</b>
	<b>13.56 MHz</b>
-30	13.560500
-20	13.560520
-10	13.560560
0	13.560420
10	13.560460
20	13.560400
30	13.560400
40	13.560420
50	13.560460
55	13.560460
Max. Deviation (MHz)	0.000560
Max. Deviation (ppm)	41.2979

### **3.6 Antenna Requirements**

#### **3.6.1 Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

#### **3.6.2 Antenna Connector Construction**

Integrate Antenna (Without any antenna connector).

**4. LIST OF MEASURING EQUIPMENTS**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz	Jun. 01, 2012	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Dec. 30, 2011	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Dec. 30, 2011	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	N/A	Nov. 16, 2011	Conduction (CO01-KS)
System Simulator	R&S	CMU200	837587/066	2G Full-Band	Dec. 30, 2011	Conduction (CO01-KS)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	Conducted (TH01-KS)
Power Meter	Agilent	E4416A	MY45101555	N/A	Aug. 22, 2012	Conducted (TH01-KS)
Power Sensor	Agilent	E9327A	MY44421198	N/A	Aug. 22, 2012	Conducted (TH01-KS)
DC Power Supply	TOPWARD	GPS-3030D	E1884515	N/A	Aug. 22, 2012	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	N/A	Dec. 30, 2011	Conducted (TH01-KS)

Note: Calibration Interval of instruments listed above is one year.

**For Radiated emissions 9kHz~1GHz**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9 KHz ~ 40 GHz	Sep. 01, 2011	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz~1GHz	May 10, 2012	Radiation (03CH02-HY)
Amplifier	AGILENT	8447D	2944A11146	100 KHz ~ 1.3 GHz	Jul. 24, 2012	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Nov. 11, 2011	Radiation (03CH02-HY)
Bilog Antenna	SHAFFNER	CBL61128	2723	30MHz~2GHz	Oct. 22, 2011	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/694/00	0 -360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA240	420/559/00	1 m – 4 m	N/A	Radiation (03CH02-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 KHz ~ 30 MHz	Jul. 28, 2012	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

**5. TEST LOCATION**

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085
KUNSHAN	ADD : No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL : +86-0512-5790-0158 FAX : +86-0512-5790-0958

6. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-110111

財團法人全國認證基金會  
Taiwan Accreditation Foundation

**Certificate of Accreditation**

This is to certify that

**Sporton International Inc.**

**EMC & Wireless Communications Laboratory**

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

**is accredited in respect of laboratory**

- Accreditation Criteria** : ISO/IEC 17025:2005
- Accreditation Number** : 1190
- Originally Accredited** : December 15, 2003
- Effective Period** : January 10, 2010 to January 09, 2013
- Accredited Scope** : Testing Field, see described in the Appendix
- Specific Accreditation Program** : Accreditation Program for Designated Testing Laboratory for Commodities Inspection  
Accreditation Program for Telecommunication Equipment Testing Laboratory  
Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities

Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : January 11, 2011

P1, total 24 pages