

# FCC RF Test Report

**APPLICANT** : ZTE CORPORATION  
**EQUIPMENT** : CDMA/LTE Digital Mobile Handset  
**BRAND NAME** : ZTE  
**MODEL NAME** : ZTE FLASH 4G LTE  
**FCC ID** : Q78-ZTEN9500  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on Jul. 02, 2012 and completely tested on Aug. 20, 2012. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



---

Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**



## TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT .....	4
<b>1 GENERAL DESCRIPTION.....</b>	<b>5</b>
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Feature of Equipment Under Test.....	5
1.4 Testing Site.....	6
1.5 Applied Standards .....	6
1.6 Ancillary Equipment List .....	6
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>7</b>
2.1 RF Output Power .....	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 RF Utility .....	8
<b>3 TEST RESULT .....</b>	<b>9</b>
3.1 6dB Bandwidth Measurement .....	9
3.2 Peak Output Power Measurement .....	12
3.3 Power Spectral Density Measurement .....	15
3.4 Conducted Band Edges and Spurious Emission Measurement .....	18
3.5 Radiated Band Edges and Spurious Emission Measurement .....	26
3.6 AC Conducted Emission Measurement.....	41
3.7 Antenna Requirements.....	45
<b>4 LIST OF MEASURING EQUIPMENT.....</b>	<b>46</b>
<b>5 UNCERTAINTY OF EVALUATION.....</b>	<b>47</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT</b>	
<b>APPENDIX B. SETUP PHOTOGRAPHS</b>	



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)(1)	A8.1(b)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.5	15.247(e)	A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}$	Pass	-
3.4	15.247(d)	A8.5	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	A8.5	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.55 dB at 87.112 MHz
3.6	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 12.28 dB at 0.440 MHz
3.7	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.2 Manufacturer

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.3 Feature of Equipment Under Test

Product Feature	
Equipment	CDMA/LTE Digital Mobile Handset
Brand Name	ZTE
Model Name	ZTE FLASH 4G LTE
FCC ID	Q78-ZTEN9500
EUT supports Radios application	CDMA/EV-DO/LTE/WLAN 11bgn/Bluetooth/Bluetooth4.0 – LE/ NFC
HW Version	N9500.H01
SW Version	N9500V1.0.0B05
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth 4.0 - LE : 2.07 dBm (0.0016 W)
Antenna Type	PIFA Antenna with gain -1.00 dBi
Type of Modulation	Bluetooth 4.0 - LE : GFSK

### 1.4 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.			
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC/IC Registration No.</b>
	TH01-KS	CO01-KS	03CH01-KS	149928/4086E-1

### 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v01
- ♦ FCC TCB Workshop 2012, April
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 3

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

### 1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
3.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	VOSTRO 1450	PPD-AR5B195	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	N/A	N/A

## 2 Test Configuration of Equipment Under Test

### 2.1 RF Output Power

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth 4.0 RF Output Power	
		Data Rate / Modulation	
		GFSK	
		1Mbps	
Ch00	2402MHz	1.31 dBm	
Ch19	2440MHz	1.36 dBm	
Ch39	2480MHz	<b>2.07 dBm</b>	

### 2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Pre-scanned tests, X, Y, Z in three orthogonal panels, were conducted to determine the final configuration from all possible combinations.


The following tables are showing the test modes as the worst cases (X plane) and recorded in this report.

The following tables are showing the test modes as the worst cases and recorded in this report.


Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.0 / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1 :CDMA2000 BC0 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + NFC Tx

## 2.3 Connection Diagram of Test System

<Bluetooth 4.0 Tx Mode>

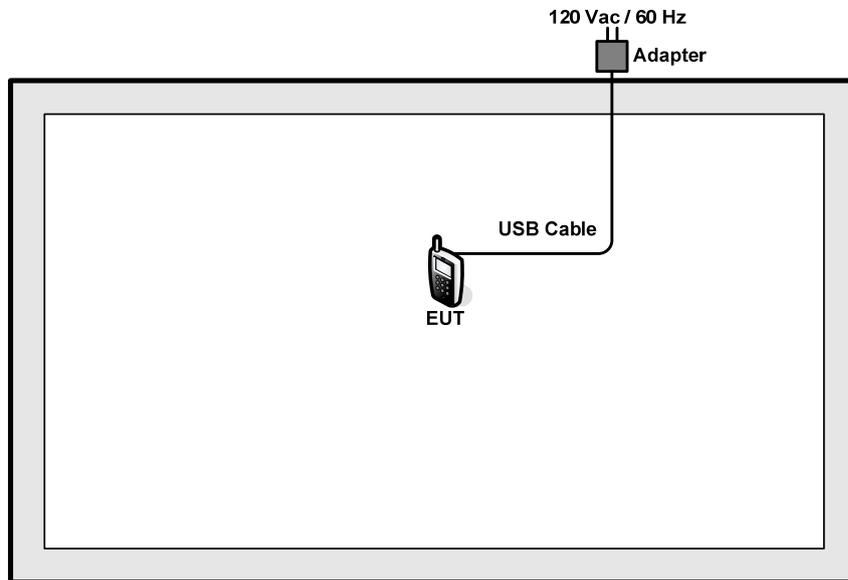

<AC Conducted Emission Mode>

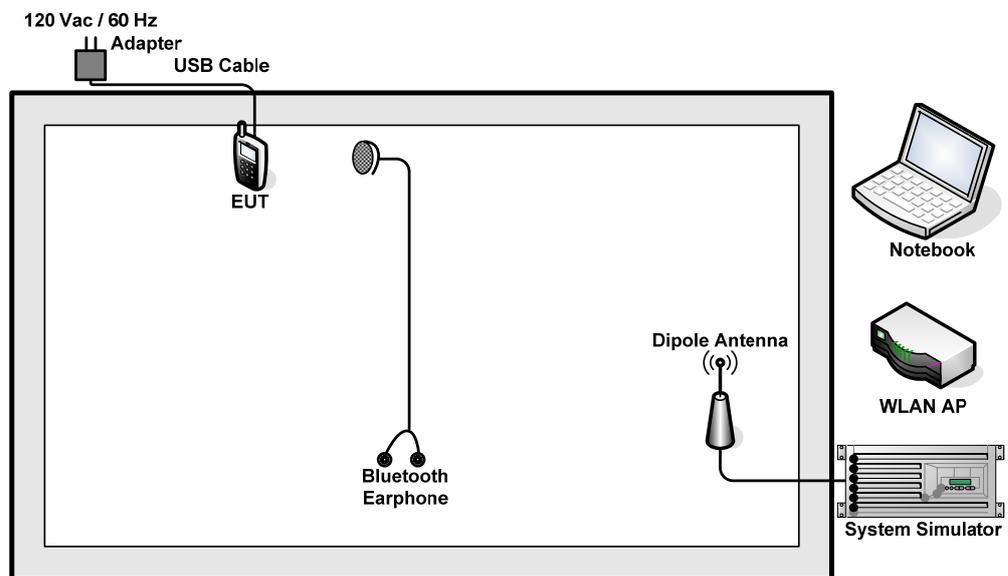

## 2.4 RF Utility

For Bluetooth function, programmed RF utility, “ADB” installed in the PC make the EUT provides functions like channel selection and power level for continuous transmitting and receiving signals.

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 KHz.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v01.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 KHz.


##### 3.1.4 Test Setup

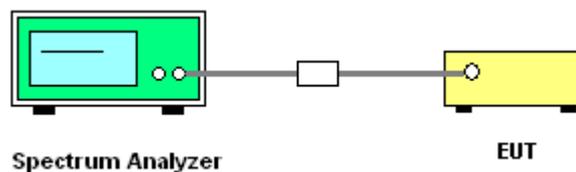






6 dB Bandwidth Plot on Channel 19

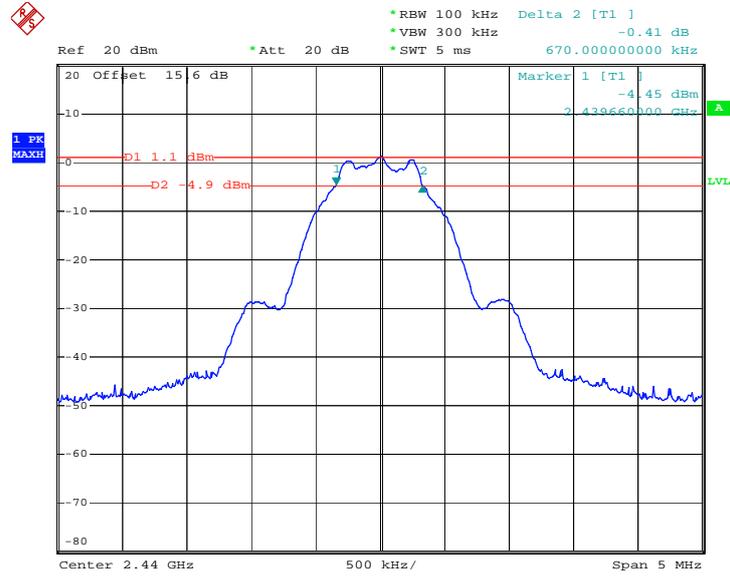

Date: 31.JUL.2012 15:27:52

6 dB Bandwidth Plot on Channel 39

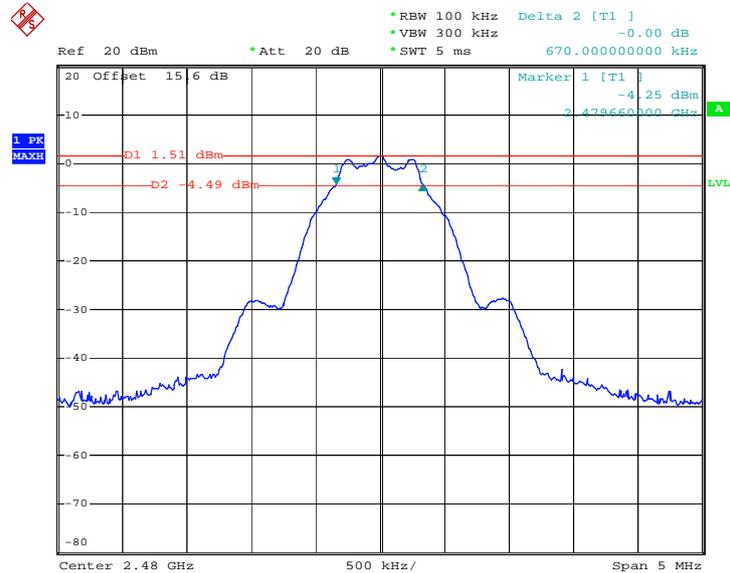

Date: 31.JUL.2012 15:30:13

## 3.2 Peak Output Power Measurement

### 3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance and TCB Workshop 2012, April.
2. The RF output of EUT was connected to the power meter by a low loss cable
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

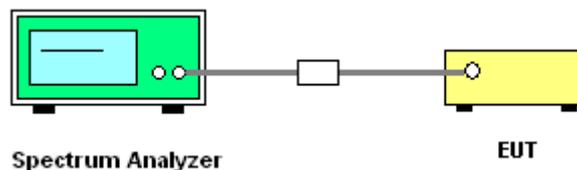




3.2.5 Test Result of Peak Output Power

Test Mode :	Bluetooth LE 1Mbps GFSK L/M/H channel	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	1.31	30.00	Pass
19	2440	1.36	30.00	Pass
39	2480	2.07	30.00	Pass


Peak Output Power Plot on Channel 00

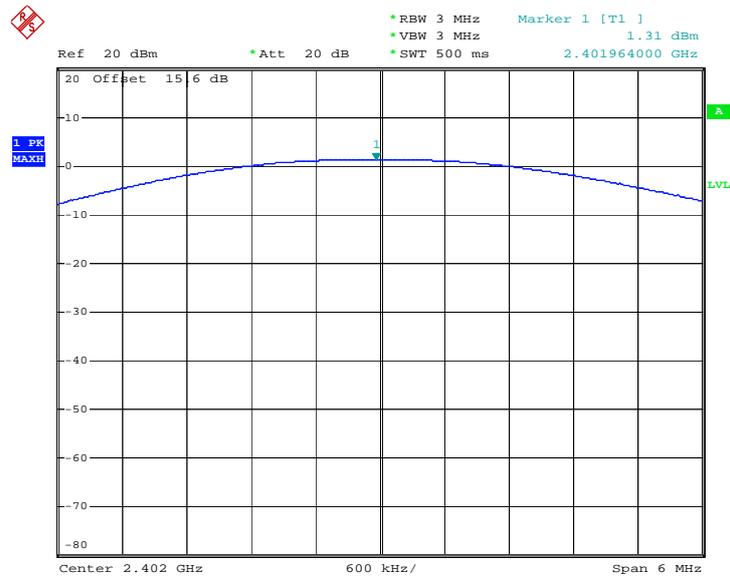

Date: 31.JUL.2012 15:17:39




Peak Output Power Plot on Channel 19

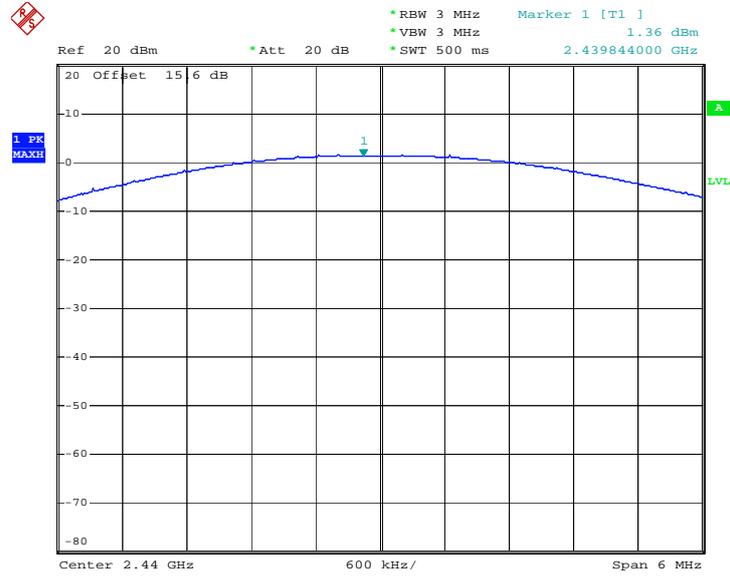

Date: 31.JUL.2012 15:19:17

Peak Output Power Plot on Channel 39

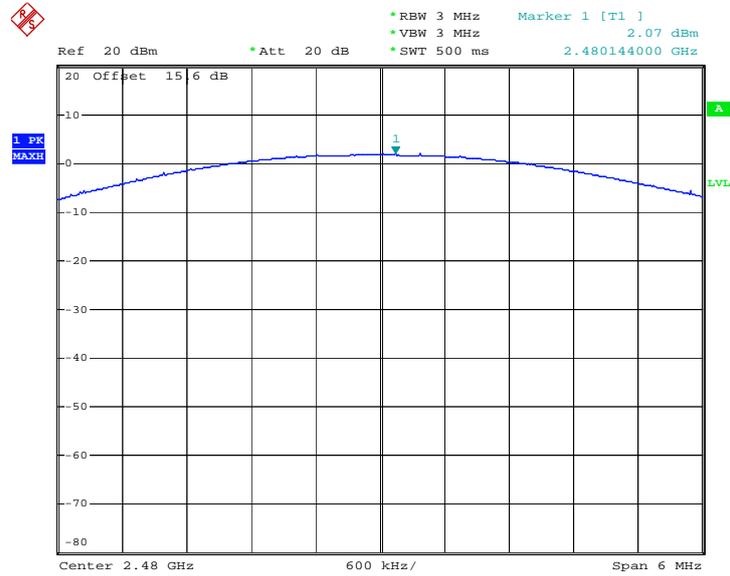

Date: 31.JUL.2012 15:20:39

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3KHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v01.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 KHz. Video bandwidth (VBW)  $\geq$  300 KHz In order to make an accurate measurement, set the span to 5-30% greater than Emission Bandwidth (EBW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
6. Record the measurement data derived from spectrum analyzer.
7. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where  $BWCF = 10\log(3 \text{ kHz}/100 \text{ kHz} = -15.2 \text{ dB})$ .

#### 3.3.4 Test Setup

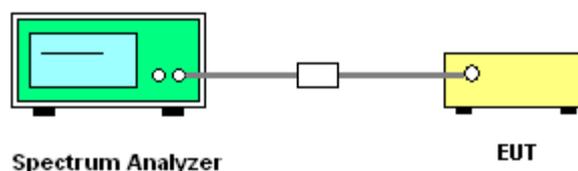



3.3.5 Test Result of Power Spectral Density


Test Mode :	Bluetooth LE 1Mbps	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	Power Density		Max. Limits (dBm)	Pass/Fail
		Measured PSD/100KHz (dBm)	PSD/3KHz (dBm)		
00	2402	1.09	-14.11	8	Pass
19	2440	1.26	-13.94	8	Pass
39	2480	1.66	-13.54	8	Pass

Note:

1. Measured power density (dBm) has offset with cable loss.
2. BWCF (dB) = 10 log (3k/100k) = -15.2 dB
3. Power Density/ 3kHz (dBm)= Measured power density/ 100KHz (dBm) + BWCF (dB)


PSD Plot on Channel 00

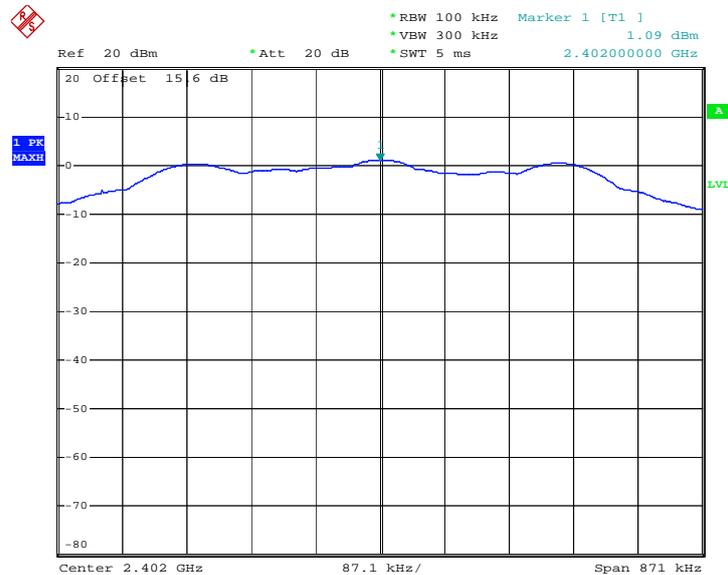

Date: 31.JUL.2012 15:41:30




PSD Plot on Channel 19

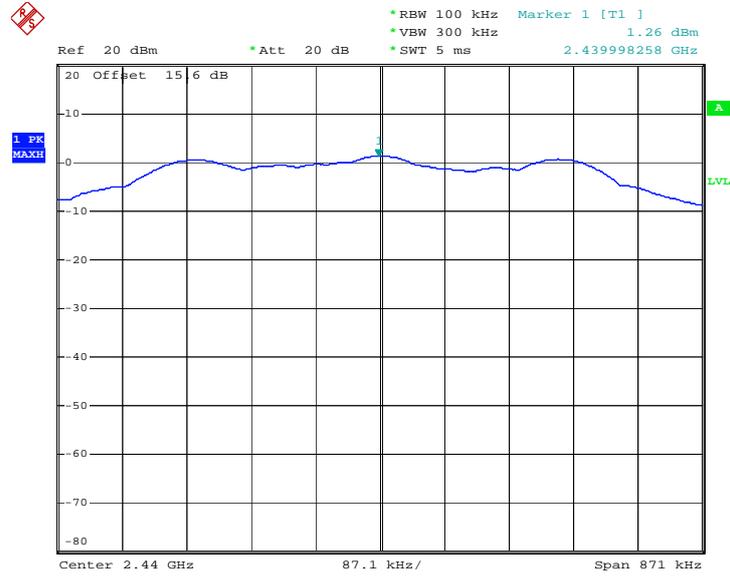

Date: 31.JUL.2012 15:42:26

PSD Plot on Channel 39

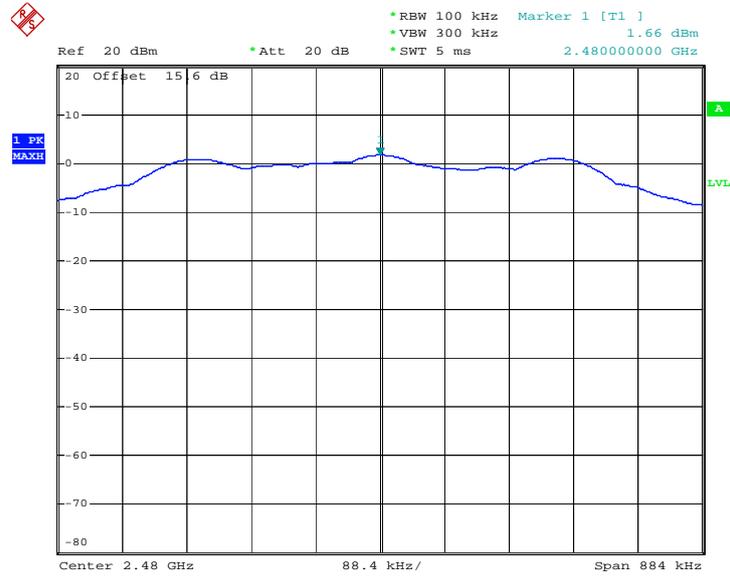

Date: 31.JUL.2012 15:43:50

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.4.3 Test Procedure

1. The testing follows the guidelines in ANSI C63.4-2003 and the Measurement Procedure of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v01.
2. The transmitter output was connected to the spectrum analyzer via a low lose cable.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, Video bandwidth (VBW)  $\geq$  RBW. Out of the authorized frequency band emissions must be at least 20 dB lower than the highest emission level within the authorized band as measured with a 100 KHz RBW. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).

### 3.4.4 Test Setup

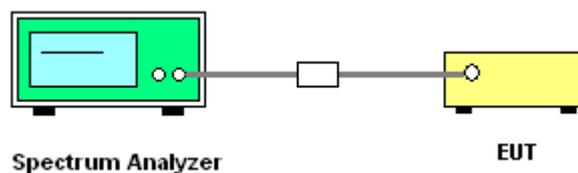




### 3.4.5 Test Result of Conducted Band Edges


Test Mode :	Bluetooth LE 1Mbps GFSK Low/High channel	Temperature :	23~24°C
Test Channel :	00 and 39	Relative Humidity :	47~48%
		Test Engineer :	Lizy Li

#### Low Band Edge Plot on Channel 00

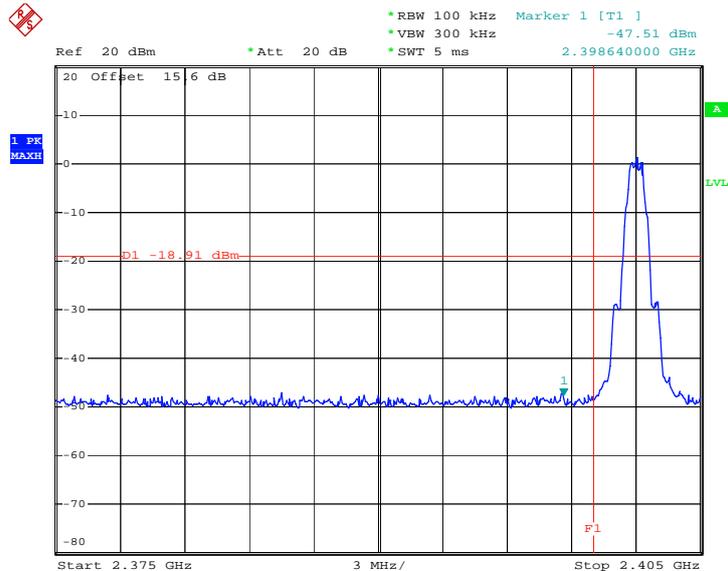

Date: 31.JUL.2012 15:48:59

#### High Band Edge Plot on Channel 39

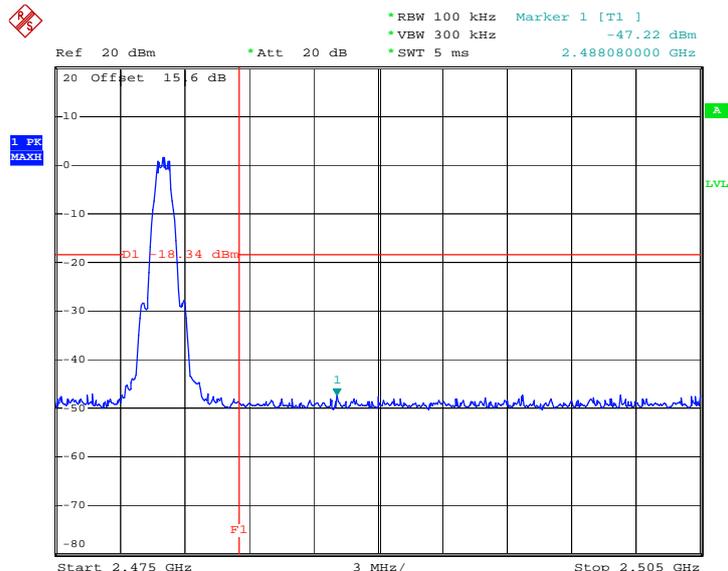


Date: 31.JUL.2012 15:47:07



3.4.6 Test Result of Conducted Spurious Emission

Test Mode :	Bluetooth LE 1Mbps GFSK Low channel	Temperature :	23~24°C
Test Channel :	00	Relative Humidity :	47~48%
		Test Engineer :	Lizy Li


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

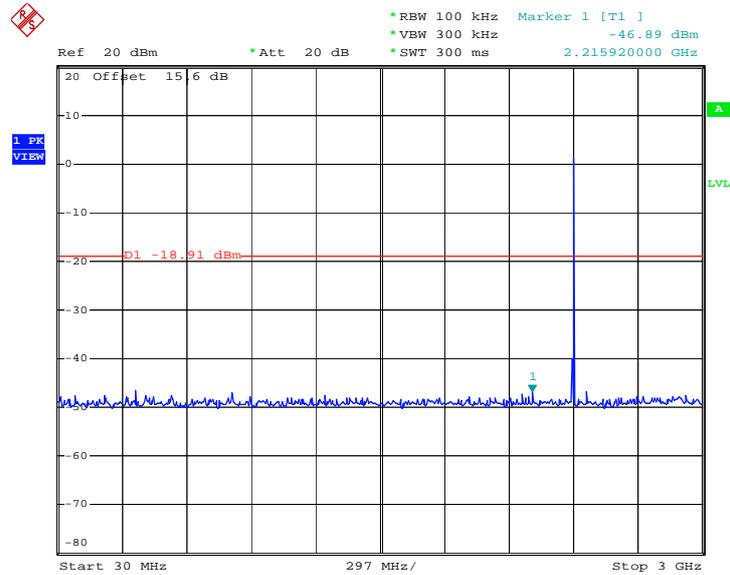

Date: 31.JUL.2012 15:51:11



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 00

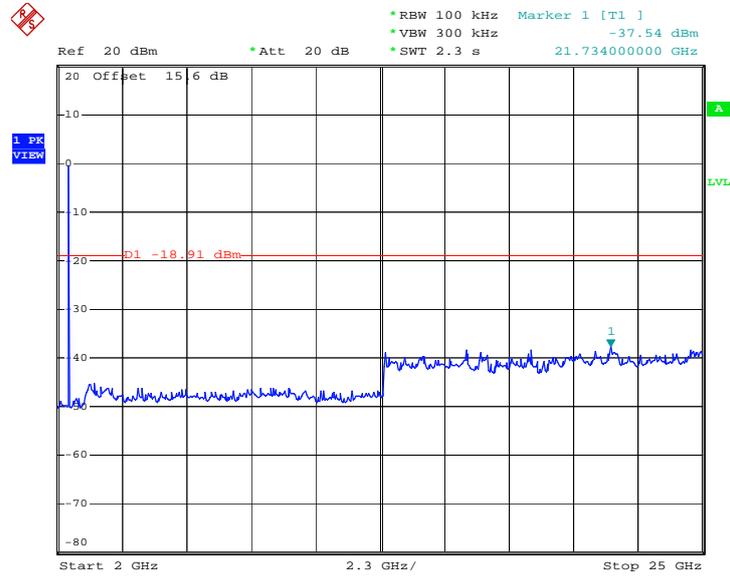


Date: 31.JUL.2012 15:52:06



Test Mode :	Bluetooth LE 1Mbps GFSK Middle channel	Temperature :	23~24°C
Test Channel :	19	Relative Humidity :	47~48%
		Test Engineer :	Lizy Li


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 19

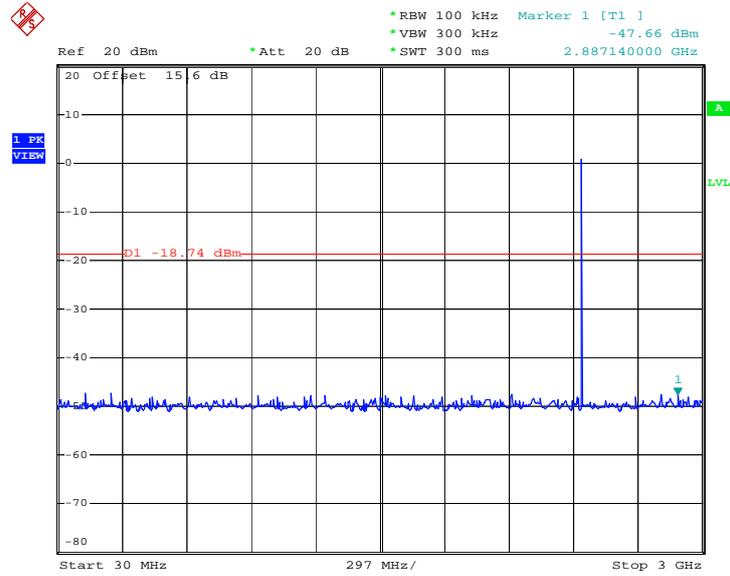

Date: 31.JUL.2012 15:53:29



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 19

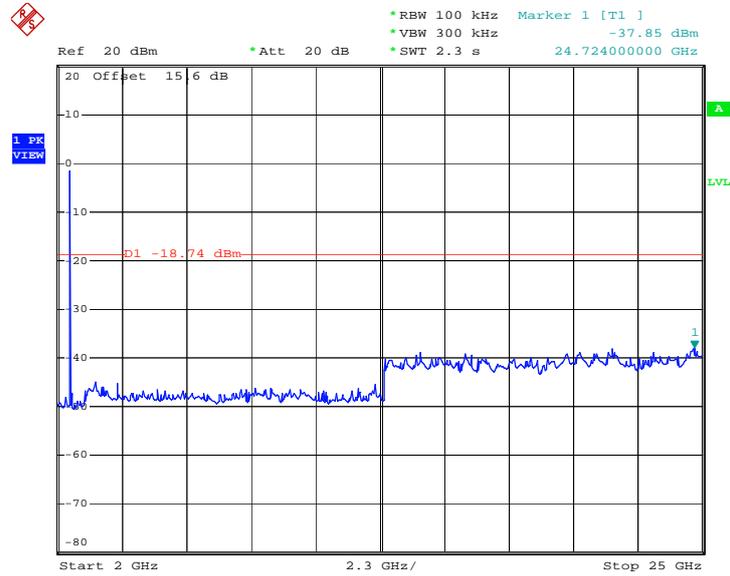


Date: 31.JUL.2012 15:54:02



Test Mode :	Bluetooth LE 1Mbps GFSK High channel	Temperature :	23~24°C
Test Channel :	39	Relative Humidity :	47~48%
		Test Engineer :	Lizy Li


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 39

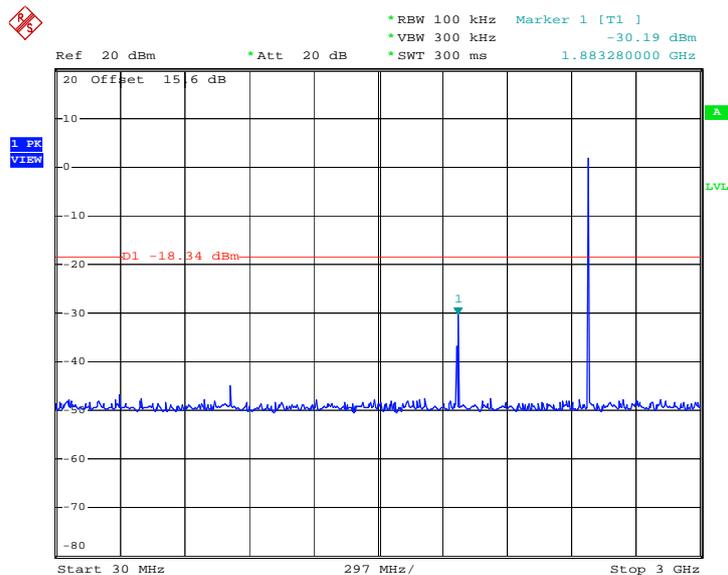

Date: 31.JUL.2012 15:55:11



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 39

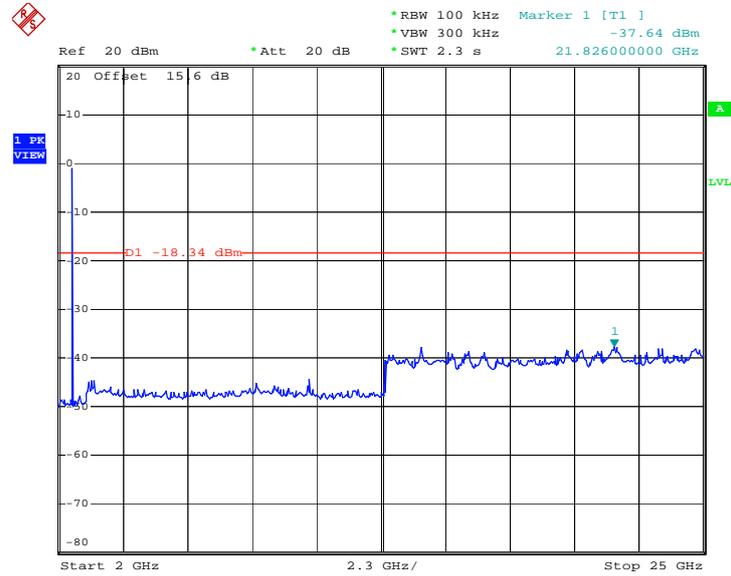

Date: 31.JUL.2012 15:56:14

### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments


See list of measuring instruments of this test report.

### 3.5.3 Test Procedures


1. The testing follows TCB Workshop 2012, April and fulfills ANSI C63.4-2003 and the guidelines in ANSI C63.10-2009 test site requirement. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving Antenna, which was mounted on the top of a variable height Antenna tower.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 KHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for Peak measurement, and then set VBW=10Hz, while maintaining all of the other instrument settings for Average measurement.
6. If the emission level of the EUT measured by the peak detector is more than 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be reported by using the quasi-peak detector.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

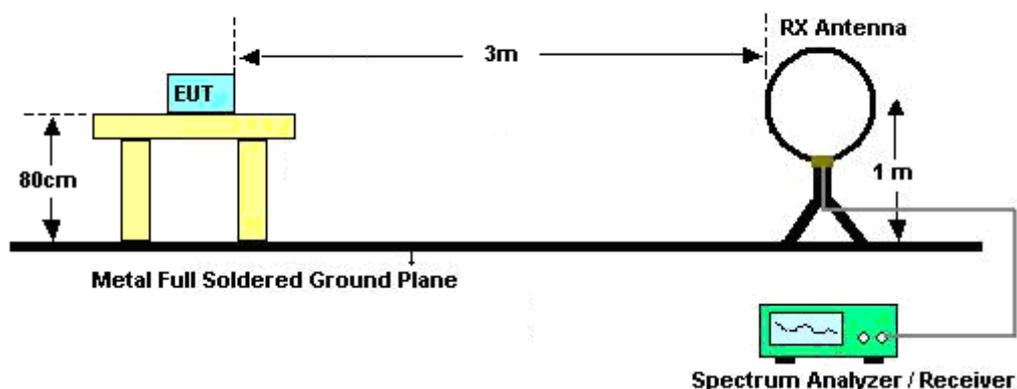

For radiated emissions from 30MHz to 1GHz

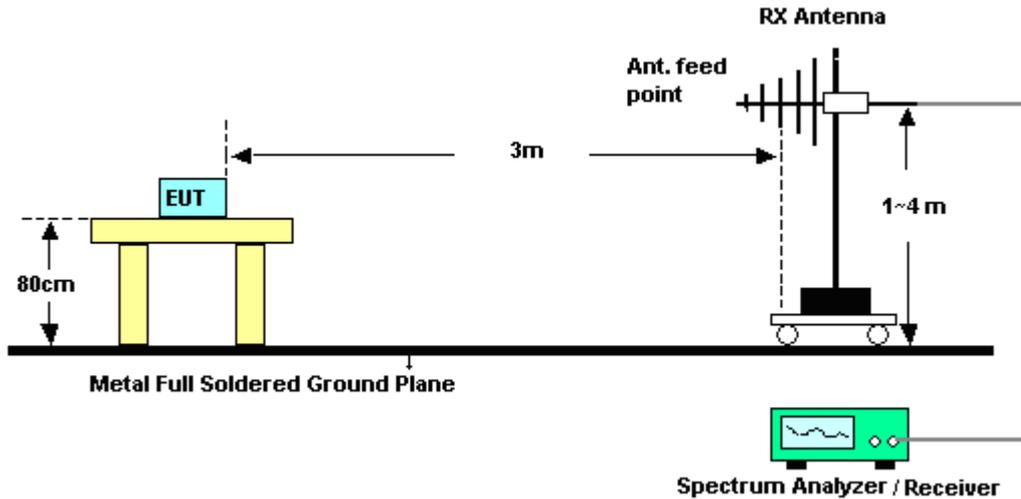

For radiated emissions above 1GHz

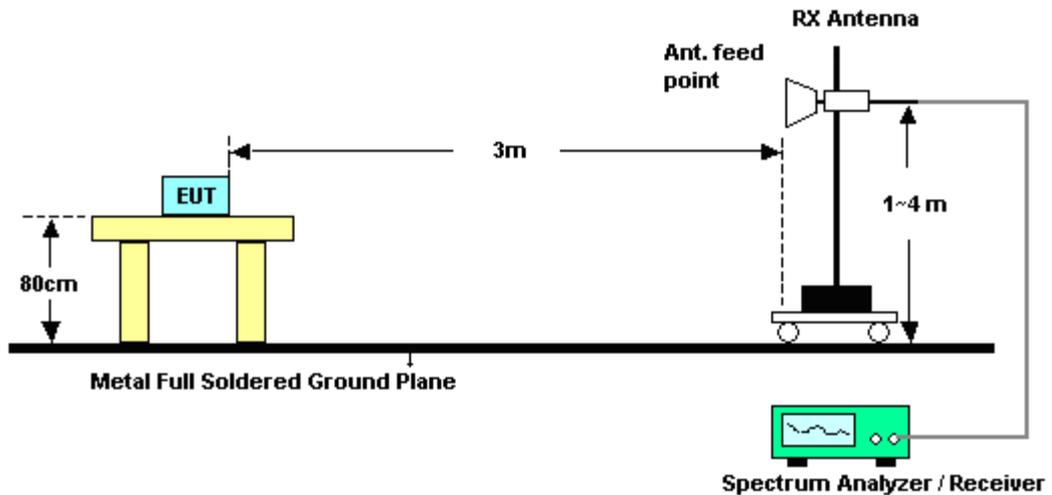

### 3.5.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	21~22°C
Test Channel :	00	Relative Humidity :	46~47%
		Test Engineer :	Chenmy Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2367.19	53.66	-20.34	74	45.74	32.81	4.22	29.11	200	112	Peak
2367.19	42.17	-11.83	54	34.25	32.81	4.22	29.11	200	112	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2367.19	54.04	-19.96	74	46.12	32.81	4.22	29.11	116	254	Peak
2367.19	43.13	-10.87	54	35.21	32.81	4.22	29.11	116	254	Average



Test Mode :	Mode 3	Temperature :	21~22°C
Test Channel :	39	Relative Humidity :	46~47%
		Test Engineer :	Chenmy Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	48.3	-25.7	74	40	33.01	4.29	29	100	0	Peak
2483.5	26.77	-27.23	54	18.47	33.01	4.29	29	100	0	Average

Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission (dBμV/m)	Delta Result (dB)	Measurement Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
Peak	97.09	48.79	48.3	74	-25.7	Pass
Average	75.56	48.79	26.77	54	-27.23	Pass

Note: Average result = Maximum field strength – Delta result

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	49.37	-24.63	74	41.07	33.01	4.29	29	100	251	Peak
2483.5	28.13	-25.87	54	19.83	33.01	4.29	29	100	251	Average


Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission (dBμV/m)	Delta Result (dB)	Measurement Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
Peak	96.11	46.74	49.37	74	-24.63	Pass
Average	74.87	46.74	28.13	54	-25.87	Pass

Note: Average result = Maximum field strength – Delta result



Test Mode :	Mode 3	Temperature :	21~22°C
Test Channel :	39	Relative Humidity :	46~47%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal

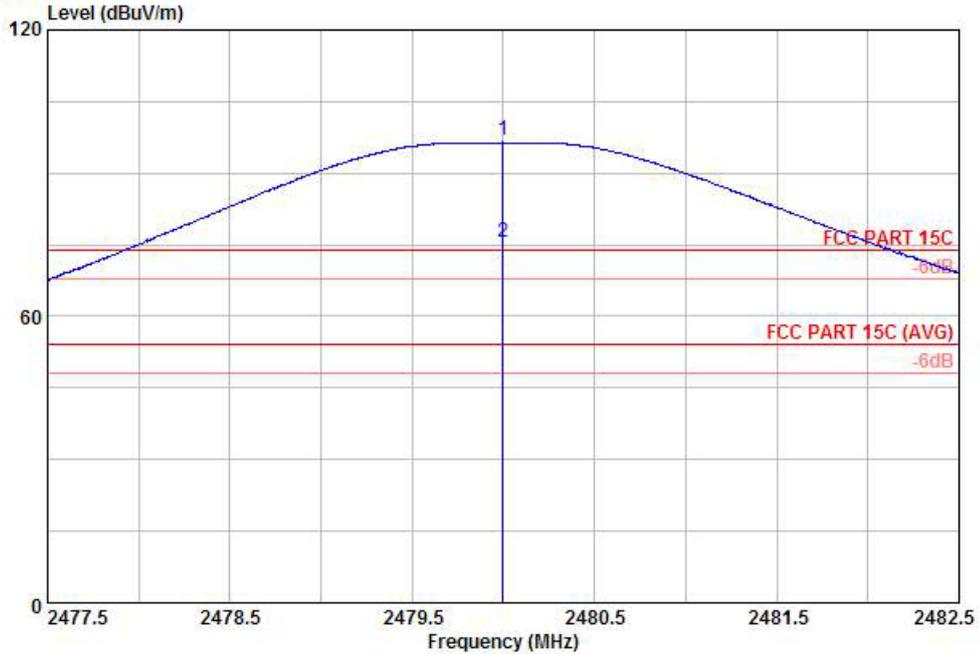

Site : 03CH01-KS  
 Condition: FCC PART 15C 3m HF ANI-100803 HORIZONTAL


Plane : H

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg	
1 X	2480.00	97.09	23.09	74.00	88.79	33.01	4.29	29.00	178 56 Peak
2 X	2480.00	75.56	21.56	54.00	67.26	33.01	4.29	29.00	178 56 Average

\* Maximum field strength of the fundamental emission



Test Mode :	Mode 3	Temperature :	21~22°C
Test Channel :	39	Relative Humidity :	46~47%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal

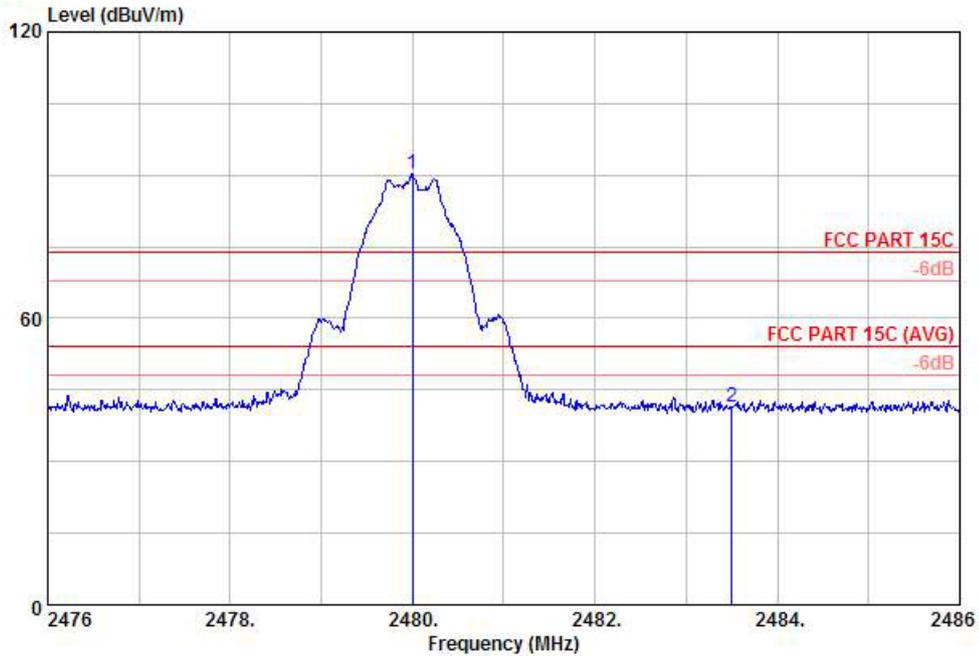

Site : 03CH01-KS  
 Condition: FCC PART 15C 3m HF ANT-100803 HORIZONTAL


Plane : H

	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 X	2480.00	90.11	16.11	74.00	81.81	33.01	4.29	29.00	---	Peak
2	2483.50	41.32	-32.68	74.00	33.02	33.01	4.29	29.00	---	Peak

\* Marker-Delta Method (RBW/VBW=100KHz): 48.79 dB , single carrier Mode



Test Mode :	Mode 3	Temperature :	21~22°C
Test Channel :	39	Relative Humidity :	46~47%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical

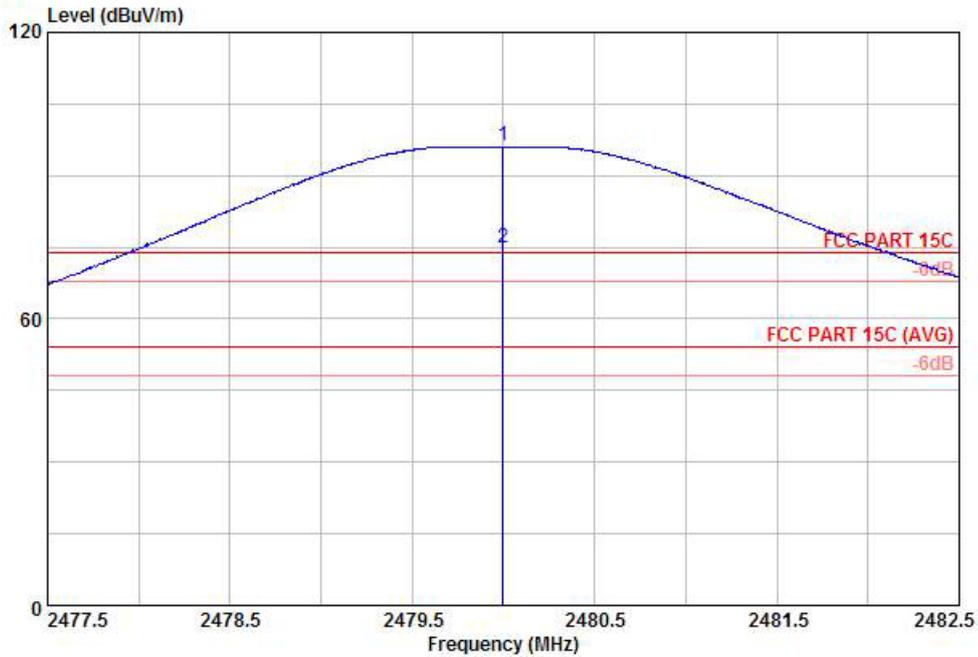

Site : 03CH01-KS  
 Condition: FCC PART 15C 3m HF ANT-100803 VERTICAL


Plane : H

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 X	2480.00	96.11	22.11	74.00	87.81	33.01	4.29	29.00	176	359	Peak
2 X	2480.00	74.87	20.87	54.00	66.57	33.01	4.29	29.00	176	359	Average

\* Maximum field strength of the fundamental emission



Test Mode :	Mode 3	Temperature :	21~22°C
Test Channel :	39	Relative Humidity :	46~47%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical

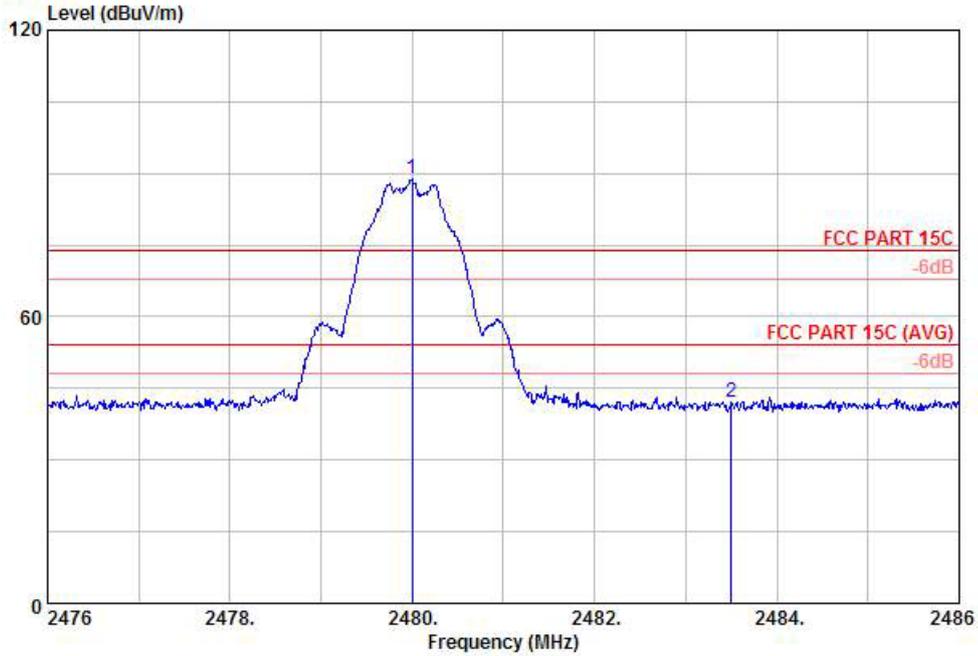

Site : 03CH01-KS  
 Condition: FCC PART 15C 3m HF ANI-100803 VERTICAL

Plane : H

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 X	2480.00	88.80	14.80	74.00	80.50	33.01	4.29	29.00	---	---	Peak
2	2483.50	42.06	-31.94	74.00	33.76	33.01	4.29	29.00	---	---	Peak

\* Marker-Delta Method (RBW/VBW=100KHz): 46.74 dB , single carrier Mode



3.5.7 Test Result of Radiated Emission (30 MHz ~ 10<sup>th</sup> Harmonic)

Test Mode :	Mode 1	Temperature :	21~22°C
Test Channel :	00	Relative Humidity :	46~47%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2402 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
95.093	21.89	-21.61	43.5	41.66	9.8	0.4	29.97	-	-	Peak
158.112	31.1	-12.4	43.5	50.85	9.67	0.53	29.95	122	206	Peak
383.932	25.99	-20.01	46	39.43	15.59	0.83	29.86	-	-	Peak
768.748	28.87	-17.13	46	37.35	19.88	1.2	29.56	-	-	Peak
869.13	29.59	-16.41	46	37.41	20.49	1.29	29.6	-	-	Peak
945.44	31.5	-14.5	46	39	20.71	1.33	29.54	-	-	Peak
2367.19	53.66	-20.34	74	45.74	32.81	4.22	29.11	200	112	Peak
2367.19	42.17	-11.83	54	34.25	32.81	4.22	29.11	200	112	Average
2402	90.44	-	-	82.41	32.86	4.23	29.06	154	55	Peak
2402	71.18	-	-	63.15	32.86	4.23	29.06	154	55	Average
2484.23	52.82	-21.18	74	44.52	33.01	4.29	29	126	355	Peak
2484.23	41.62	-12.38	54	33.32	33.01	4.29	29	126	355	Average



<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Chenmy Cheng	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2402 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	26.67	-13.33	40	38.49	18	0.26	30.08	197	13	Peak
36.254	25.74	-14.26	40	40.94	14.65	0.23	30.08	-	-	Peak
84.405	25.54	-14.46	40	47.66	7.53	0.37	30.02	-	-	Peak
88.964	26.02	-17.48	43.5	47.01	8.61	0.39	29.99	-	-	Peak
560.693	27.67	-18.33	46	37.81	18.52	1.01	29.67	-	-	Peak
945.44	30.58	-15.42	46	38.08	20.71	1.33	29.54	-	-	Peak
2367.19	54.04	-19.96	74	46.12	32.81	4.22	29.11	116	254	Peak
2367.19	43.13	-10.87	54	35.21	32.81	4.22	29.11	116	254	Average
2402	89.58	-	-	81.55	32.86	4.23	29.06	122	349	Peak
2402	70.6	-	-	62.57	32.86	4.23	29.06	122	349	Average
2492.97	53.29	-20.71	74	44.93	33.05	4.3	28.99	100	57	Peak
2492.97	42	-12	54	33.64	33.05	4.3	28.99	100	57	Average



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	19	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Chenmy Cheng	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2440 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
95.093	28.1	-15.4	43.5	47.87	9.8	0.4	29.97	-	-	Peak
147.921	31.68	-11.82	43.5	51.01	10.14	0.51	29.98	113	215	Peak
287.99	26.17	-19.83	46	42.59	12.82	0.71	29.95	-	-	Peak
383.932	27.41	-18.59	46	40.85	15.59	0.83	29.86	-	-	Peak
737.071	29.28	-16.72	46	37.91	19.78	1.17	29.58	-	-	Peak
942.131	30.62	-15.38	46	38.12	20.7	1.33	29.53	-	-	Peak
2327.29	54.05	-19.95	74	46.28	32.76	4.2	29.19	122	314	Peak
2327.29	42.28	-11.72	54	34.51	32.76	4.2	29.19	122	314	Average
2440	94	-	-	85.83	32.95	4.25	29.03	152	59	Peak
2440	73.71	-	-	65.54	32.95	4.25	29.03	152	59	Average
2484.42	53.17	-20.83	74	44.87	33.01	4.29	29	200	0	Peak
2484.42	42.36	-11.64	54	34.06	33.01	4.29	29	200	0	Average



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	19	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Chenmy Cheng	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2440 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
36.637	27.27	-12.73	40	42.91	14.19	0.24	30.07	-	-	Peak
87.112	36.45	-3.55	40	57.98	8.09	0.38	30	200	0	Peak
226.099	26.65	-19.35	46	45.37	10.59	0.63	29.94	-	-	Peak
564.639	28.88	-17.12	46	39.01	18.52	1.02	29.67	-	-	Peak
661.151	30.25	-15.75	46	39.84	18.97	1.1	29.66	-	-	Peak
952.094	30.7	-15.3	46	38.17	20.74	1.33	29.54	-	-	Peak
2323.3	53.66	-20.34	74	45.89	32.76	4.2	29.19	112	144	Peak
2323.3	41.91	-12.09	54	34.14	32.76	4.2	29.19	112	144	Average
2440	92.49	-	-	84.32	32.95	4.25	29.03	101	21	Peak
2440	72.39	-	-	64.22	32.95	4.25	29.03	101	21	Average
2488.03	53.65	-20.35	74	45.31	33.05	4.29	29	200	237	Peak
2488.03	42.7	-11.3	54	34.36	33.05	4.29	29	200	237	Average



Test Mode :	Mode 3	Temperature :	21~22°C
Test Channel :	39	Relative Humidity :	46~47%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
148.963	31.35	-12.15	43.5	50.74	10.07	0.51	29.97	100	0	Peak
167.237	29.48	-14.02	43.5	49.55	9.31	0.54	29.92			Peak
383.932	26.61	-19.39	46	40.05	15.59	0.83	29.86			Peak
763.376	30.15	-15.85	46	38.61	19.89	1.2	29.55			Peak
890.728	29.89	-16.11	46	37.64	20.46	1.3	29.51			Peak
952.094	30.48	-15.52	46	37.95	20.74	1.33	29.54			Peak
2350	52.91	-21.09	74	45.07	32.78	4.21	29.15	142	136	Peak
2350	40	-14	54	32.16	32.78	4.21	29.15	142	136	Average
2480	97.09	-	-	88.79	33.01	4.29	29	178	56	Peak
2480	75.56	-	-	67.26	33.01	4.29	29	178	56	Average
2483.5	48.3	-25.7	74	40	33.01	4.29	29	100	0	Peak
2483.5	26.77	-27.23	54	18.47	33.01	4.29	29	100	0	Average



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Chenmy Cheng	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2480 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	28.05	-11.95	40	39.87	18	0.26	30.08	199	22	Peak
37.68	25.25	-14.75	40	41.37	13.7	0.24	30.06			Peak
88.964	22.7	-20.8	43.5	43.69	8.61	0.39	29.99			Peak
558.73	28.63	-17.37	46	38.78	18.51	1.01	29.67			Peak
614.214	28.17	-17.83	46	38.06	18.67	1.07	29.63			Peak
952.094	30.01	-15.99	46	37.48	20.74	1.33	29.54			Peak
2342	53.17	-20.83	74	45.34	32.78	4.21	29.16	100	255	Peak
2342	40.17	-13.83	54	32.34	32.78	4.21	29.16	100	255	Average
2480	96.11	-	-	87.81	33.01	4.29	29	176	359	Peak
2480	74.87	-	-	66.57	33.01	4.29	29	176	359	Average
2483.5	49.37	-24.63	74	41.07	33.01	4.29	29	100	251	Peak
2483.5	28.13	-25.87	54	19.83	33.01	4.29	29	100	251	Average

## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.6.3 Test Procedures

1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
1. Connect EUT to the power mains through a line impedance stabilization network (LISN).
2. All the support units are connecting to the other LISN.
3. The LISN provides 50 ohm coupling impedance for the measuring instrument.
4. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
5. Both sides of AC line were checked for maximum conducted interference.
6. The frequency range from 150 kHz to 30 MHz was searched.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


### 3.6.4 Test Setup

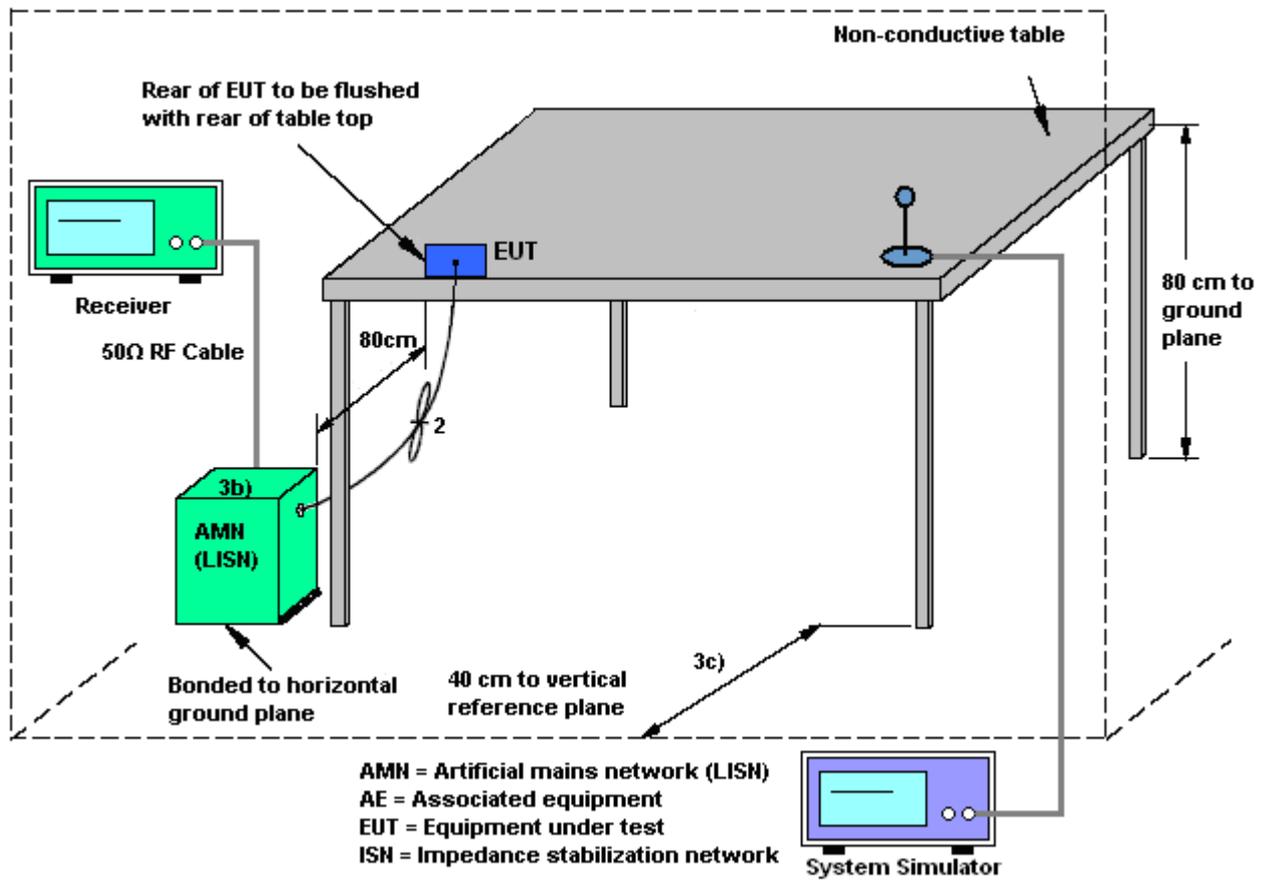



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	CDMA2000 BC0 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + NFC Tx		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

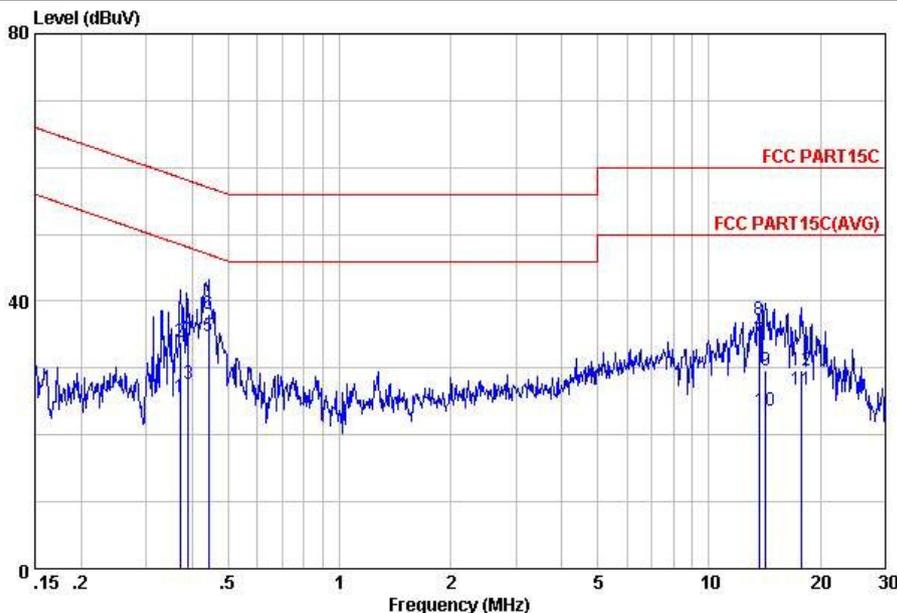


Site : C001-KS  
 Condition: FCC PART15C LISN-111230 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.37	25.73	-22.74	48.47	15.20	-0.08	10.61	Average
2	0.37	33.83	-24.64	58.47	23.30	-0.08	10.61	QP
3	0.39	27.54	-20.54	48.08	17.00	-0.08	10.62	Average
4	0.39	35.34	-22.74	58.08	24.80	-0.08	10.62	QP
5	0.44	34.74	-12.28	47.02	24.20	-0.08	10.62	Average
6	0.44	38.04	-18.98	57.02	27.50	-0.08	10.62	QP
7	13.62	34.03	-15.97	50.00	23.11	-0.06	10.98	Average
8	13.62	37.13	-22.87	60.00	26.21	-0.06	10.98	QP
9	14.21	29.74	-30.26	60.00	18.80	-0.05	10.99	QP
10	14.21	23.64	-26.36	50.00	12.70	-0.05	10.99	Average
11	17.75	26.70	-23.30	50.00	15.61	0.04	11.05	Average
12	17.75	29.60	-30.40	60.00	18.51	0.04	11.05	QP



Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	CDMA2000 BC0 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + NFC Tx		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

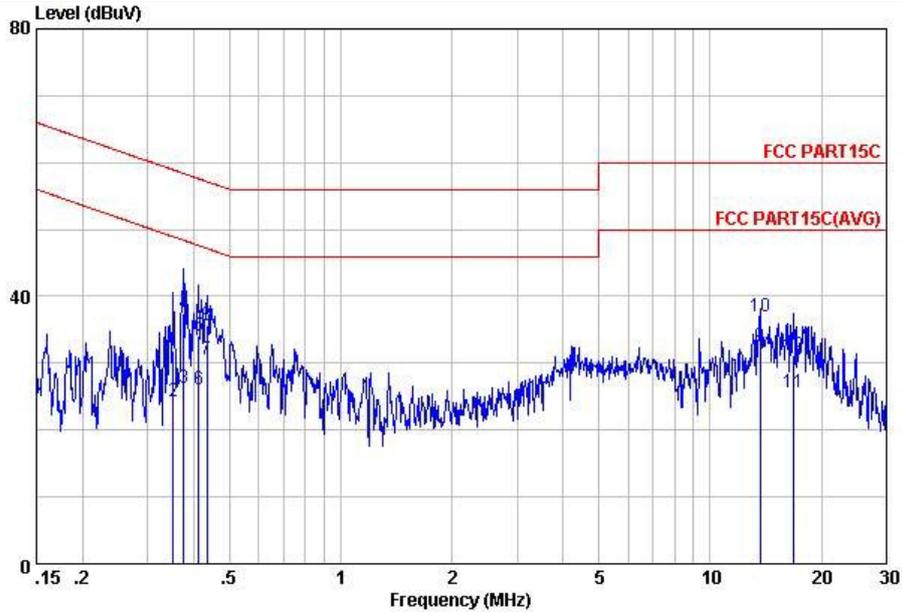

Site : C001-KS  
 Condition: FCC PART15C LISN-111230 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.35	31.93	-26.98	58.91	21.40	-0.08	10.61	QP
2	0.35	24.33	-24.58	48.91	13.80	-0.08	10.61	Average
3	0.38	26.34	-22.05	48.39	15.81	-0.08	10.61	Average
4	0.38	37.34	-21.05	58.39	26.81	-0.08	10.61	QP
5	0.41	34.14	-23.45	57.59	23.60	-0.08	10.62	QP
6	0.41	26.14	-21.45	47.59	15.60	-0.08	10.62	Average
7	0.44	30.44	-16.71	47.15	19.90	-0.08	10.62	Average
8	0.44	35.74	-21.41	57.15	25.20	-0.08	10.62	QP
9	13.62	32.61	-17.39	50.00	21.70	-0.07	10.98	Average
10	13.62	37.01	-22.99	60.00	26.10	-0.07	10.98	QP
11	16.75	25.62	-24.38	50.00	14.61	-0.01	11.02	Average
12	16.75	31.22	-28.78	60.00	20.21	-0.01	11.02	QP



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Connected Construction**

Non-standard connector used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	Jul. 31, 2012	Dec. 29, 2012	Conducted (TH01-KS)
Power Meter	Agilent	E4416A	MY45101555	N/A	Aug. 23, 2011	Jul. 31, 2012	Aug. 22, 2012	Conducted (TH01-KS)
Power Sensor	Agilent	E9327A	MY44421198	N/A	Aug. 23, 2011	Jul. 31, 2012	Aug. 22, 2012	Conducted (TH01-KS)
DC Power Supply	GWINSTEK	GPS-3030D	E1884515	N/A	Aug. 23, 2011	Jul. 31, 2012	Aug. 22, 2012	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	N/A	Dec. 30, 2011	Jul. 31, 2012	Dec. 29, 2012	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 09, 2011	Aug. 20, 2012	Nov. 08, 2012	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	Aug. 20, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 08, 2011	Aug. 20, 2012	Dec. 07, 2012	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	860004/00	9 kHz~30 MHz	Jul. 28, 2012	Aug. 20, 2012	Jul. 27, 2013	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	00075959	1GHz~18GHz	Jan. 06, 2012	Aug. 20, 2012	Jan. 05, 2013	Radiation (03CH01-KS)
Amplifier	Wireless	FPA-6592G	060004	30MHz~2GHz	Dec. 30, 2011	Aug. 20, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Dec. 30, 2011	Aug. 20, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701023	1GHz~18GHz	Nov. 07, 2011	Aug. 20, 2012	Nov. 06, 2012	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Oct. 11, 2011	Aug. 20, 2012	Oct. 10, 2012	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	Jun. 01, 2012	Aug. 20, 2012	May 31, 2013	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Dec. 30, 2011	Aug. 20, 2012	Dec. 29, 2012	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Dec. 30, 2011	Aug. 20, 2012	Dec. 29, 2012	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	N/A	Nov. 16, 2011	Aug. 20, 2012	Nov. 15, 2012	Conduction (CO01-KS)
System Simulator	R&S	CMU200	837587/066	2G Full-Band	Dec. 30, 2011	Aug. 20, 2012	Dec. 29, 2012	Conduction (CO01-KS)

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.26
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.54
---	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.72
---	------



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP270201 as below.