


# FCC SAR Test Report

APPLICANT : ZTE CORPORATION  
EQUIPMENT : CDMA/LTE Multi-mode Digital Mobile Phone  
BRAND NAME : ZTE  
MODEL NAME : ZTE N9510  
FCC ID : Q78-ZTEN9510  
STANDARD : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2003  
FCC OET Bulletin 65 Supplement C (Edition 01-01)

The product was completely tested on Apr. 30, 2013. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

  
Reviewed by: Eric Huang / Deputy Manager

  
Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**

## Table of Contents

|                                                                     |           |
|---------------------------------------------------------------------|-----------|
| <b>1. Statement of Compliance.....</b>                              | <b>4</b>  |
| <b>2. Administration Data.....</b>                                  | <b>6</b>  |
| 2.1 Testing Laboratory .....                                        | 6         |
| 2.2 Applicant .....                                                 | 6         |
| 2.3 Manufacturer.....                                               | 6         |
| 2.4 Application Details .....                                       | 6         |
| <b>3. General Information.....</b>                                  | <b>7</b>  |
| 3.1 Description of Equipment Under Test (EUT).....                  | 7         |
| 3.2 Maximum RF output power among production units .....            | 8         |
| 3.3 Applied Standard .....                                          | 11        |
| 3.4 Device Category and SAR Limits .....                            | 11        |
| 3.5 Test Conditions .....                                           | 11        |
| <b>4. Specific Absorption Rate (SAR) .....</b>                      | <b>12</b> |
| 4.1 Introduction .....                                              | 12        |
| 4.2 SAR Definition .....                                            | 12        |
| <b>5. SAR Measurement System .....</b>                              | <b>13</b> |
| 5.1 E-Field Probe .....                                             | 14        |
| 5.2 Data Acquisition Electronics (DAE).....                         | 14        |
| 5.3 Robot .....                                                     | 15        |
| 5.4 Measurement Server .....                                        | 15        |
| 5.5 Phantom .....                                                   | 16        |
| 5.6 Device Holder .....                                             | 16        |
| 5.7 Data Storage and Evaluation .....                               | 17        |
| 5.8 Test Equipment List .....                                       | 19        |
| <b>6. Tissue Simulating Liquids .....</b>                           | <b>20</b> |
| <b>7. SAR System Verification .....</b>                             | <b>22</b> |
| 7.1 Purpose of System Performance check .....                       | 22        |
| 7.2 System Setup .....                                              | 22        |
| 7.3 SAR System Verification Results .....                           | 23        |
| <b>8. EUT Testing Position.....</b>                                 | <b>24</b> |
| 8.1 Define two imaginary lines on the handset .....                 | 24        |
| 8.2 Cheek Position.....                                             | 25        |
| 8.3 Tilted Position .....                                           | 25        |
| 8.4 Body Worn Position .....                                        | 26        |
| <b>9. Measurement Procedures .....</b>                              | <b>27</b> |
| 9.1 Spatial Peak SAR Evaluation .....                               | 27        |
| 9.2 Power Reference Measurement .....                               | 28        |
| 9.3 Area & Zoom Scan Procedures .....                               | 28        |
| 9.4 Volume Scan Procedures .....                                    | 29        |
| 9.5 SAR Averaged Methods .....                                      | 29        |
| 9.6 Power Drift Monitoring .....                                    | 29        |
| <b>10. Conducted RF Output Power (Unit: dBm) .....</b>              | <b>30</b> |
| <b>11. Exposure Positions Consideration .....</b>                   | <b>35</b> |
| <b>12. SAR Test Results .....</b>                                   | <b>37</b> |
| 12.1 Test Records for Head SAR Test .....                           | 37        |
| 12.2 Test Records for Hotspot SAR Test .....                        | 39        |
| 12.3 Test Records for Body Worn SAR Test .....                      | 41        |
| 12.4 Repeated SAR Measurement.....                                  | 43        |
| 12.5 Highest SAR Plot .....                                         | 44        |
| 12.6 Simultaneous Multi-band Transmission Analysis .....            | 50        |
| 12.7 Head Co-location Simultaneous Transmission Analysis .....      | 52        |
| 12.8 Hotspot Co-location Simultaneous Transmission Analysis .....   | 55        |
| 12.9 Body-Worn Co-location Simultaneous Transmission Analysis ..... | 57        |
| 12.10 Simultaneous analysis - SPLSR calculation .....               | 60        |
| <b>13. Uncertainty Assessment.....</b>                              | <b>72</b> |
| <b>14. References.....</b>                                          | <b>75</b> |
| <b>Appendix A. Plots of System Performance Check</b>                |           |
| <b>Appendix B. Plots of SAR Measurement</b>                         |           |
| <b>Appendix C. DASY Calibration Certificate</b>                     |           |
| <b>Appendix D. Test Setup Photos</b>                                |           |



## Revision History

| REPORT NO. | VERSION | DESCRIPTION             | ISSUED DATE  |
|------------|---------|-------------------------|--------------|
| FA320404   | Rev. 01 | Initial issue of report | May 13, 2013 |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |

## 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **ZTE CORPORATION**  
**DUT: CDMA/LTE Multi-mode Digital Mobile Phone, Brand Name: ZTE, Model Name: ZTE N9510** are as follows.

### <Highest Reported standalone SAR Summary>

| Exposure Position   | Frequency Band   | Reported 1g-SAR (W/kg) | Equipment Class | Highest Reported 1g-SAR (W/kg) |
|---------------------|------------------|------------------------|-----------------|--------------------------------|
| Head                | CDMA 2000 BC0    | 0.90                   | PCE             | 0.90                           |
|                     | CDMA 2000 BC1    | 0.56                   |                 |                                |
|                     | CDMA 2000 BC10   | 0.85                   |                 |                                |
|                     | LTE Band 25      | 0.85                   |                 |                                |
|                     | WLAN 5.2GHz Band | 0.33                   | NII             | 0.33                           |
|                     | WLAN 5.8GHz Band | 0.15                   | DTS             | 0.15                           |
|                     | WLAN 2.4GHz Band | 0.02                   |                 |                                |
| Hotspot (1cm Gap)   | CDMA 2000 BC0    | 1.01                   | PCE             | 1.43                           |
|                     | CDMA 2000 BC1    | 1.43                   |                 |                                |
|                     | CDMA 2000 BC10   | 1.02                   |                 |                                |
|                     | LTE Band 25      | 1.07                   |                 |                                |
|                     | WLAN 2.4GHz Band | 0.02                   | DTS             | 0.02                           |
| Body-worn (1cm Gap) | CDMA 2000 BC0    | 0.99                   | PCE             | 1.44                           |
|                     | CDMA 2000 BC1    | 1.44                   |                 |                                |
|                     | CDMA 2000 BC10   | 1.00                   |                 |                                |
|                     | LTE Band 25      | 1.07                   |                 |                                |
|                     | WLAN 5.2GHz Band | 0.17                   | NII             | 0.17                           |
|                     | WLAN 5.8GHz Band | 0.10                   | DTS             | 0.10                           |
|                     | WLAN 2.4GHz Band | 0.03                   |                 |                                |

**<Highest Simultaneous transmission SAR>**

| Frequency Band    | Equipment Class | Exposure Position | Highest Reported Simultaneous Transmission 1g-SAR (W/kg) |
|-------------------|-----------------|-------------------|----------------------------------------------------------|
| CDMA2000 BC1/BC10 | PCE             | Body              | 1.59                                                     |
| WLAN 5GHz Band    | NII             |                   |                                                          |

| Frequency Band   | Equipment Class | Exposure Position | Highest Reported Simultaneous Transmission 1g-SAR (W/kg) |
|------------------|-----------------|-------------------|----------------------------------------------------------|
| CDMA2000 BC10    | PCE             | Body              | 1.46                                                     |
| WLAN 2.4GHz Band | DTS             |                   |                                                          |

| Frequency Band | Equipment Class | Exposure Position | Highest Reported Simultaneous Transmission 1g-SAR (W/kg) |
|----------------|-----------------|-------------------|----------------------------------------------------------|
| CDMA2000 BC1   | PCE             | Head              | 1.47                                                     |
| LTE Band 25    |                 |                   |                                                          |
| Bluetooth      | DSS             |                   |                                                          |

**Remark:**

The highest simultaneous transmission reported SAR is scalar SAR summation per FCC KDB 690873 D01 v01r02. Simultaneous transmission SAR measurement is exempted according to the SPLSR analysis per KDB 447498 D01v05.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003 and FCC OET Bulletin 65 Supplement C (Edition 01-01).

## **2. Administration Data**

### **2.1 Testing Laboratory**

|                    |                                                                                                                  |
|--------------------|------------------------------------------------------------------------------------------------------------------|
| Test Site          | SPORTON INTERNATIONAL (KUNSHAN) INC.                                                                             |
| Test Site Location | No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.<br>TEL: +86-0512-5790-0158<br>FAX: +86-0512-5790-0958 |

### **2.2 Applicant**

|              |                                                                                                                    |
|--------------|--------------------------------------------------------------------------------------------------------------------|
| Company Name | ZTE CORPORATION                                                                                                    |
| Address      | ZTE Plaza, Keji Road South, Hi-Tech Industrial Park,<br>Nanshan District, Shenzhen, Guangdong, 518057, P. R. China |

### **2.3 Manufacturer**

|              |                                                                                                                    |
|--------------|--------------------------------------------------------------------------------------------------------------------|
| Company Name | ZTE CORPORATION                                                                                                    |
| Address      | ZTE Plaza, Keji Road South, Hi-Tech Industrial Park,<br>Nanshan District, Shenzhen, Guangdong, 518057, P. R. China |

### **2.4 Application Details**

|                               |               |
|-------------------------------|---------------|
| Date of Start during the Test | Apr. 21, 2013 |
| Date of End during the Test   | Apr. 30, 2013 |

### 3. General Information

#### 3.1 Description of Equipment Under Test (EUT)

| Product Feature & Specification                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EUT</b>                                                                                                                                                                                                                                                                            | CDMA/LTE Multi-mode Digital Mobile Phone                                                                                                                                                                                                                                                                                                          |
| <b>Brand Name</b>                                                                                                                                                                                                                                                                     | ZTE                                                                                                                                                                                                                                                                                                                                               |
| <b>Model Name</b>                                                                                                                                                                                                                                                                     | ZTE N9510                                                                                                                                                                                                                                                                                                                                         |
| <b>FCC ID</b>                                                                                                                                                                                                                                                                         | Q78-ZTEN9510                                                                                                                                                                                                                                                                                                                                      |
| <b>MEID Code</b>                                                                                                                                                                                                                                                                      | 99000142422855                                                                                                                                                                                                                                                                                                                                    |
| <b>TX Frequency</b>                                                                                                                                                                                                                                                                   | CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz<br>CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz<br>CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz<br>LTE Band 25: 1850.7 MHz ~ 1914.3 MHz<br>WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz<br>WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz<br>WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz<br>Bluetooth: 2402 MHz ~ 2480 MHz<br>NFC : 13.56 MHz |
| <b>Antenna Type</b>                                                                                                                                                                                                                                                                   | WWAN: PIFA Antenna<br>LTE: PIFA Antenna<br>WLAN: PIFA Antenna<br>Bluetooth: PIFA Antenna<br>NFC: Coil Antenna                                                                                                                                                                                                                                     |
| <b>HW Version</b>                                                                                                                                                                                                                                                                     | czfA                                                                                                                                                                                                                                                                                                                                              |
| <b>SW Version</b>                                                                                                                                                                                                                                                                     | N9510V1.0.0B02                                                                                                                                                                                                                                                                                                                                    |
| <b>Uplink Modulations</b>                                                                                                                                                                                                                                                             | CDMA2000 : QPSK<br>CDMA2000 1xEV-DO : 8PSK<br>LTE: QPSK, 16QAM<br>802.11b: DSSS (DBPSK / DQPSK / CCK)<br>802.11a/g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)<br>Bluetooth BDR (1Mbps): GFSK<br>Bluetooth EDR (2Mbps): $\pi/4$ -DQPSK<br>Bluetooth EDR (3Mbps): 8-DPSK<br>Bluetooth 4.0 LE: GFSK<br>NFC : ASK                                          |
| <b>DUT Stage</b>                                                                                                                                                                                                                                                                      | Identical Prototype                                                                                                                                                                                                                                                                                                                               |
| <b>Remark:</b><br>1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.<br>2. This device, WLAN 2.4GHz support hotspot/ WiFi Direct operation; WLAN 5GHz does not support those operations. |                                                                                                                                                                                                                                                                                                                                                   |

**3.2 Maximum RF output power among production units**

| Maximum Average Power for Production Unit |                |         |                |         |                 |         |
|-------------------------------------------|----------------|---------|----------------|---------|-----------------|---------|
| Band                                      | CDMA BC0 (dBm) |         | CDMA BC1 (dBm) |         | CDMA BC10 (dBm) |         |
| Mode                                      | Normal         | Reduced | Normal         | Reduced | Normal          | Reduced |
| 1xRTT RC1 SO55                            | 25             | 17      | 24             | 17      | 25              | 17      |
| 1xRTT RC3 SO55                            | 25             | 17      | 24             | 17      | 25              | 17      |
| 1xRTT RC3 SO32 (+ F-SCH)                  | 25             | 17      | 24             | 17      | 25              | 17      |
| 1xRTT RC3 SO32 (+SCH)                     | 25             | 17      | 24             | 17      | 25              | 17      |
| 1xEV-DO Rev 0 (RTAP 153.6kbps)            | 25             | 17      | 24             | 17      | 25              | 17      |
| 1xEV-DO Rev A (RETAP 4096bits)            | 25             | 17      | 24             | 17      | 25              | 17      |

| IEEE 802.11 maximum power(dBm) |      |      |      |        |
|--------------------------------|------|------|------|--------|
| Mode/Band                      | a    | b    | g    | n-HT20 |
| WLAN 2.4GHz                    |      | 14.5 | 14.5 | 13.5   |
| WLAN 5.2GHz                    | 13   |      |      | 12     |
| WLAN 5.8GHz                    | 11.5 |      |      | 11.5   |

| Mode / Band       | Bluetooth maximum power(dBm) |                         |                |                 |
|-------------------|------------------------------|-------------------------|----------------|-----------------|
|                   | 1Mbps (GFSK)                 | 2Mbps ( $\pi/4$ -DQPSK) | 3Mbps (8-DPSK) | BT4.0-LE (GFSK) |
| 2.4 GHz Bluetooth | 1                            | 0                       | 0              | 0.5             |



| LTE Band 25 |          |           |            |              |               |
|-------------|----------|-----------|------------|--------------|---------------|
| Modulation  | BW (MHz) | RB size   | Target MPR | Normal Power | Reduced Power |
| QPSK        | 10       | $\leq 12$ | 0          | 24.5         | 18            |
| QPSK        | 10       | $> 12$    | 1          | 23.5         | 17            |
| 16QAM       | 10       | $\leq 12$ | 1          | 23.5         | 17            |
| 16QAM       | 10       | $> 12$    | 2          | 22.5         | 16            |
| QPSK        | 5        | $\leq 8$  | 0          | 24.5         | 18            |
| QPSK        | 5        | $> 8$     | 1          | 23.5         | 17            |
| 16QAM       | 5        | $\leq 8$  | 1          | 23.5         | 17            |
| 16QAM       | 5        | $> 8$     | 2          | 22.5         | 16            |
| QPSK        | 3        | $\leq 4$  | 0          | 24.5         | 18            |
| QPSK        | 3        | $> 4$     | 1          | 23.5         | 17            |
| 16QAM       | 3        | $\leq 4$  | 1          | 23.5         | 17            |
| 16QAM       | 3        | $> 4$     | 2          | 22.5         | 16            |
| QPSK        | 1.4      | $\leq 5$  | 0          | 24.5         | 18            |
| QPSK        | 1.4      | $> 5$     | 1          | 23.5         | 17            |
| 16QAM       | 1.4      | $\leq 5$  | 1          | 23.5         | 17            |
| 16QAM       | 1.4      | $> 5$     | 2          | 22.5         | 16            |

**Remark:**

1. By design, other RB configurations and higher-order modulation RF output power will never exceed maximum output power listed above; detailed information is included in "tune-up procedure" exhibit.
2. LTE MPR implementation is the same for normal mode and power reduction mode.

The table below summarized necessary items addressed in KDB 941225 D05 v02.

|                                                                         |                   |             |                 |                                          |                 |             |                  |             |
|-------------------------------------------------------------------------|-------------------|-------------|-----------------|------------------------------------------|-----------------|-------------|------------------|-------------|
| FCC ID                                                                  |                   |             |                 | Q78-ZTEN9510                             |                 |             |                  |             |
| EUT                                                                     |                   |             |                 | CDMA/LTE Multi-mode Digital Mobile Phone |                 |             |                  |             |
| Operating Frequency Range of each LTE transmission band                 |                   |             |                 | LTE Band 25: 1850.7 MHz ~ 1914.3 MHz     |                 |             |                  |             |
| Channel Bandwidth                                                       |                   |             |                 | 1.4MHz, 3MHz, 5MHz, 10MHz                |                 |             |                  |             |
| Transmission (H, M, L) channel numbers and frequencies in each LTE band |                   |             |                 |                                          |                 |             |                  |             |
| LTE Band 25                                                             |                   |             |                 |                                          |                 |             |                  |             |
|                                                                         | Bandwidth 1.4 MHz |             | Bandwidth 3 MHz |                                          | Bandwidth 5 MHz |             | Bandwidth 10 MHz |             |
|                                                                         | Ch. #             | Freq. (MHz) | Ch. #           | Freq. (MHz)                              | Ch. #           | Freq. (MHz) | Ch. #            | Freq. (MHz) |
| L                                                                       | 26047             | 1850.7      | 26055           | 1851.5                                   | 26065           | 1852.5      | 26090            | 1855        |
| M                                                                       | 26365             | 1882.5      | 26365           | 1882.5                                   | 26365           | 1882.5      | 26365            | 1882.5      |
| H                                                                       | 26683             | 1914.3      | 26675           | 1913.5                                   | 26665           | 1912.5      | 26640            | 1910        |

| E category, uplink modulations used                                                                | Category 3, QPSK, and 16QAM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |            |                                                 |        |        |        |          |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
|----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------------------------|--------|--------|--------|----------|--|----------|---------|---------|-------|--------|--------|--------|------|-----|-----|-----|------|------|------|-----|--------|-----|-----|-----|------|------|------|-----|--------|-----|-----|-----|------|------|------|-----|
| LTE transmitter and antenna implementation (standalone or sharing hardware components / antennas ) | LTE owns standalone transmitter and antenna.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |                                                 |        |        |        |          |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
| LTE Voice / Data requirements                                                                      | Data only                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |            |                                                 |        |        |        |          |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
| LTE MPR permanently built-in by design                                                             | <div>Yes, per 3GPP TS 36.101 v11.0.0</div> <div><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</b></div> <table><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>&gt; 5</td><td>&gt; 4</td><td>&gt; 8</td><td>&gt; 12</td><td>&gt; 16</td><td>&gt; 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>&gt; 5</td><td>&gt; 4</td><td>&gt; 8</td><td>&gt; 12</td><td>&gt; 16</td><td>&gt; 18</td><td>≤ 2</td></tr></table> | Modulation | Channel bandwidth / Transmission bandwidth (RB) |        |        |        |          |  | MPR (dB) | 1.4 MHz | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz | QPSK | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 1 | 16 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 1 | 16 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 2 |
| Modulation                                                                                         | Channel bandwidth / Transmission bandwidth (RB)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |            |                                                 |        |        |        | MPR (dB) |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
|                                                                                                    | 1.4 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 3.0 MHz    | 5 MHz                                           | 10 MHz | 15 MHz | 20 MHz |          |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
| QPSK                                                                                               | > 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | > 4        | > 8                                             | > 12   | > 16   | > 18   | ≤ 1      |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
| 16 QAM                                                                                             | ≤ 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | ≤ 4        | ≤ 8                                             | ≤ 12   | ≤ 16   | ≤ 18   | ≤ 1      |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
| 16 QAM                                                                                             | > 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | > 4        | > 8                                             | > 12   | > 16   | > 18   | ≤ 2      |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
| LTE A-MPR                                                                                          | In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |            |                                                 |        |        |        |          |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
| Base station simulator used for Testing                                                            | Anritsu MT8820C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |            |                                                 |        |        |        |          |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
| Power reduction applied to satisfy SAR compliance                                                  | Yes, SVLTE mode (1xRTT and LTE simultaneously) power reduction.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |            |                                                 |        |        |        |          |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |

The SVLTE operating mode, which means CDMA 1x RTT(voice) and LTE (data) transmitting simultaneously, the power reduction is implemented on this device and cannot be changed by end users or overridden by power control command from base stations.

The power reduction implementation is defined as following table.

| CDMA2000 1x voice<br>BC0/BC1/BC10 | LTE Band 25, data mode<br>Maximum power |
|-----------------------------------|-----------------------------------------|
| $P \geq 17$                       | 18                                      |
| $P < 17$                          | 24.5                                    |

**Table 3.1: Power Reduction Implementation (Unit: dBm)**

### 3.3 Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC OET Bulletin 65 Supplement C (Edition 01-01)
- FCC KDB 447498 D01 v05
- FCC KDB 648474 D04 v01
- FCC KDB 248227 D01 v01r02
- FCC KDB 941225 D01 v02
- FCC KDB 941225 D05 v02
- FCC KDB 941225 D06 v01
- FCC KDB 865664 D01 v01

### 3.4 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

### 3.5 Test Conditions

#### 3.5.1 Ambient Condition

|                     |             |
|---------------------|-------------|
| Ambient Temperature | 20 to 24 °C |
| Humidity            | < 60 %      |

#### 3.5.2 Test Configuration

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT.

During WLAN SAR testing EUT is configured with the WLAN continuous TX tool, and the transmission duty factor was monitored on the spectrum analyzer with zero-span setting

For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.

## **4. Specific Absorption Rate (SAR)**

### **4.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **4.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left( \frac{\delta T}{\delta t} \right)$$


Where: C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 5. SAR Measurement System

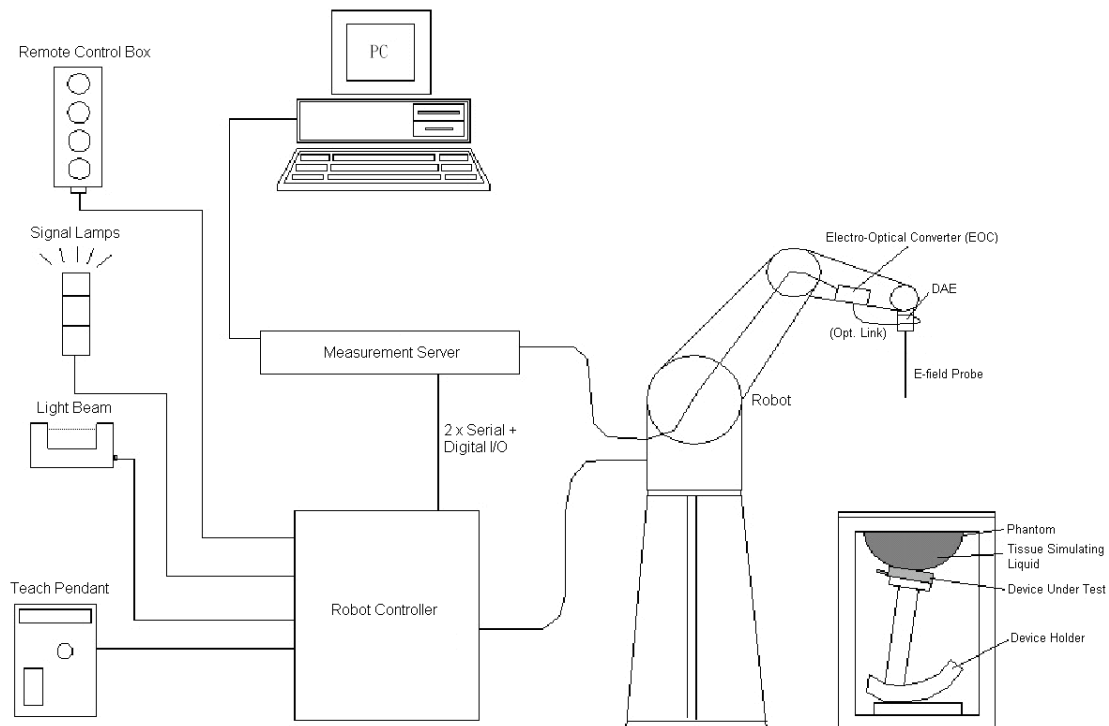

**Fig 5.1 SPEAG DASY System Configurations**

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Component details are described in in the following sub-sections.

## 5.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

### 5.1.1 E-Field Probe Specification

#### <EX3DV4 Probe>

|                      |                                                                                                                                                             |                                                                                     |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Construction</b>  | Symmetrical design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |  |
| <b>Frequency</b>     | 10 MHz to 6 GHz; Linearity: $\pm 0.2$ dB                                                                                                                    |                                                                                     |
| <b>Directivity</b>   | $\pm 0.3$ dB in HSL (rotation around probe axis)<br>$\pm 0.5$ dB in tissue material (rotation normal to probe axis)                                         |                                                                                     |
| <b>Dynamic Range</b> | 10 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB<br>(noise: typically $< 1$ $\mu$ W/g)                                                                     |                                                                                     |
| <b>Dimensions</b>    | Overall length: 330 mm (Tip: 20 mm)<br>Tip diameter: 2.5 mm (Body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                        |                                                                                     |

**Fig 5.2 Photo of EX3DV4**

### 5.1.2 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy shall be evaluated and within  $\pm 0.25$ dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

## 5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.3 Photo of DAE**

### **5.3 Robot**

The SPEAG DASY system uses the high precision robots (DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability  $\pm 0.035$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



**Fig 5.4 Photo of DASY5**

### **5.4 Measurement Server**

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



**Fig 5.5 Photo of Server for DASY5**

## 5.5 Phantom

### <SAM Twin Phantom>

|                          |                                                            |                                                                                     |
|--------------------------|------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Shell Thickness</b>   | 2 ± 0.2 mm;<br>Center ear point: 6 ± 0.2 mm                |  |
| <b>Filling Volume</b>    | Approx. 25 liters                                          |                                                                                     |
| <b>Dimensions</b>        | Length: 1000 mm; Width: 500 mm;<br>Height: adjustable feet |                                                                                     |
| <b>Measurement Areas</b> | Left Hand, Right Hand, Flat Phantom                        |                                                                                     |

**Fig 5.6 Photo of SAM Phantom**

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

## 5.6 Device Holder

### <Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



**Fig 5.7 Device Holder**



## 5.7 Data Storage and Evaluation

### 5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lossy media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### 5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

|                            |                           |                                                                         |
|----------------------------|---------------------------|-------------------------------------------------------------------------|
| <b>Probe parameters :</b>  | - Sensitivity             | Norm <sub>i</sub> , a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub> |
|                            | - Conversion factor       | ConvF <sub>i</sub>                                                      |
|                            | - Diode compression point | dcp <sub>i</sub>                                                        |
| <b>Device parameters :</b> | - Frequency               | f                                                                       |
|                            | - Crest factor            | cf                                                                      |
| <b>Media parameters :</b>  | - Conductivity            | $\sigma$                                                                |
|                            | - Density                 | $\rho$                                                                  |

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with  $V_i$  = compensated signal of channel i, (i = x, y, z)  
 $U_i$  = input signal of channel i, (i = x, y, z)  
 $cf$  = crest factor of exciting field (DASY parameter)  
 $dcp_i$  = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } H_i = \sqrt{V_i \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}}$$

with  $V_i$  = compensated signal of channel i, (i = x, y, z)  
 $\text{Norm}_i$  = sensor sensitivity of channel i, (i = x, y, z),  $\mu\text{V}/(\text{V/m})^2$  for E-field Probes  
 $\text{ConvF}$  = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 $f$  = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel i in V/m  
 $H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g  
 $E_{\text{tot}}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in  $\text{g/cm}^3$

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

### 5.8 Test Equipment List

| Manufacturer | Name of Equipment                    | Type/Model    | Serial Number | Calibration   |               |
|--------------|--------------------------------------|---------------|---------------|---------------|---------------|
|              |                                      |               |               | Last Cal.     | Due Date      |
| SPEAG        | 835MHz System Validation Kit         | D835V2        | 4d091         | Nov. 18, 2011 | Nov. 16, 2013 |
| SPEAG        | 1900MHz System Validation Kit        | D1900V2       | 5d118         | Nov. 21, 2011 | Nov. 16, 2013 |
| SPEAG        | 2450MHz System Validation Kit        | D2450V2       | 736           | Jul. 25, 2011 | Jul. 24, 2013 |
| SPEAG        | 5000MHz System Validation Kit        | D5000V2       | 1113          | Nov. 14, 2011 | Nov. 12, 2013 |
| SPEAG        | Data Acquisition Electronics         | DAE4          | 1210          | Dec. 05, 2012 | Dec. 04, 2013 |
| SPEAG        | Dosimetric E-Field Probe             | EX3DV4        | 3857          | Jun. 20, 2012 | Jun. 19, 2013 |
| SPEAG        | SAM Twin Phantom                     | QD 000 P40 CB | TP-1477       | NCR           | NCR           |
| SPEAG        | SAM Twin Phantom                     | QD 000 P40 CB | TP-1479       | NCR           | NCR           |
| SPEAG        | Phone Positioner                     | N/A           | N/A           | NCR           | NCR           |
| Anritsu      | Radio communication analyzer         | MT8820C       | 6201074235    | Nov. 29, 2012 | Nov. 28, 2013 |
| Agilent      | Wireless Communication Test Set      | E5515C        | MY48367160    | Oct. 25, 2012 | Oct. 24, 2013 |
| R&S          | Universal Radio Communication Tester | CMU200        | 116456        | Sep. 19, 2012 | Sep. 18, 2013 |
| Agilent      | ENA Series Network Analyzer          | E5071C        | MY46106933    | Aug. 31, 2012 | Aug. 30, 2013 |
| R&S          | Signal Generator                     | SMR40         | 100455        | Jan. 18, 2013 | Jan. 17, 2014 |
| Agilent      | Power Meter                          | E4416A        | MY45101555    | Aug. 22, 2012 | Aug. 21, 2013 |
| Agilent      | Power Sensor                         | E9327A        | MY44421198    | Aug. 22, 2012 | Aug. 21, 2013 |
| Agilent      | Dual Directional Coupler             | 778D          | 50422         | Note 4        |               |
| Woken        | Attenuator 1                         | WK0602-XX     | N/A           | Note 4        |               |
| PE           | Attenuator 2                         | PE7005-10     | N/A           | Note 4        |               |
| PE           | Attenuator 3                         | PE7005-3      | N/A           | Note 4        |               |
| Agilent      | Dielectric Probe Kit                 | 85070D        | US01440205    | Note 5        |               |
| AR           | Power Amplifier                      | 5S1G4M2       | 328767        | Note 6        |               |
| R&S          | Spectrum Analyzer                    | FSP30         | 101399        | Jun. 01 2012  | May 31, 2013  |

**Table 5.1 Test Equipment List**

**Note:**

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. Referring to KDB 865664 D01v01, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole D835V2, SN: 4d091, D1900V2, SN: 5d118, D2450V2, SN: 736, D5000V2, SN: 1113 can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.
4. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
5. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Agilent.
6. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it
7. Attenuator 1 insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.

## 6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.


**Fig 6.1 Photo of Liquid Height for Head SAR**

**Fig 6.2 Photo of Liquid Height for Body SAR**

The following table gives the recipes for tissue simulating liquid.

| Frequency (MHz)  | Water (%) | Sugar (%) | Cellulose (%) | Salt (%) | Preventol (%) | DGBE (%) | Conductivity ( $\sigma$ ) | Permittivity ( $\epsilon_r$ ) |
|------------------|-----------|-----------|---------------|----------|---------------|----------|---------------------------|-------------------------------|
| <b>For Head</b>  |           |           |               |          |               |          |                           |                               |
| 835              | 40.3      | 57.9      | 0.2           | 1.4      | 0.2           | 0        | 0.90                      | 41.5                          |
| 1800, 1900, 2000 | 55.2      | 0         | 0             | 0.3      | 0             | 44.5     | 1.40                      | 40.0                          |
| 2450             | 55.0      | 0         | 0             | 0        | 0             | 45.0     | 1.80                      | 39.2                          |
| <b>For Body</b>  |           |           |               |          |               |          |                           |                               |
| 835              | 50.8      | 48.2      | 0             | 0.9      | 0.1           | 0        | 0.97                      | 55.2                          |
| 1800, 1900, 2000 | 70.2      | 0         | 0             | 0.4      | 0             | 29.4     | 1.52                      | 53.3                          |
| 2450             | 68.6      | 0         | 0             | 0        | 0             | 31.4     | 1.95                      | 52.7                          |

**Table 6.1 Recipes of Tissue Simulating Liquid**

### Simulating Liquid for 5G, Manufactured by SPEAG

| Ingredients        | (% by weight) |
|--------------------|---------------|
| Water              | 64~78%        |
| Mineral oil        | 11~18%        |
| Emulsifiers        | 9~15%         |
| Additives and Salt | 2~3%          |

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

| Frequency (MHz) | Liquid Type | Liquid Temp. (°C) | Conductivity ( $\sigma$ ) | Permittivity ( $\epsilon_r$ ) | Conductivity Target ( $\sigma$ ) | Permittivity Target ( $\epsilon_r$ ) | Delta ( $\sigma$ ) (%) | Delta ( $\epsilon_r$ ) (%) | Limit (%) | Date          |
|-----------------|-------------|-------------------|---------------------------|-------------------------------|----------------------------------|--------------------------------------|------------------------|----------------------------|-----------|---------------|
| 835             | Head        | 21.1              | 0.905                     | 42.26                         | 0.90                             | 41.5                                 | 0.56                   | 1.83                       | ±5        | Apr. 24, 2013 |
| 1900            | Head        | 21.3              | 1.424                     | 38.881                        | 1.40                             | 40.0                                 | 1.71                   | -2.80                      | ±5        | Apr. 23, 2013 |
| 2450            | Head        | 21.3              | 1.842                     | 39.923                        | 1.80                             | 39.2                                 | 2.33                   | 1.84                       | ±5        | Apr. 29, 2013 |
| 5200            | Head        | 21.2              | 4.805                     | 35.479                        | 4.66                             | 36.0                                 | 3.11                   | -1.45                      | ±5        | Apr. 29, 2013 |
| 5800            | Head        | 21.2              | 5.407                     | 34.377                        | 5.27                             | 35.3                                 | 2.60                   | -2.61                      | ±5        | Apr. 29, 2013 |
| 835             | Body        | 21.4              | 0.98                      | 54.481                        | 0.97                             | 55.2                                 | 1.03                   | -1.30                      | ±5        | Apr. 21, 2013 |
| 835             | Body        | 21.2              | 0.983                     | 55.184                        | 0.97                             | 55.2                                 | 1.34                   | -0.03                      | ±5        | Apr. 30, 2013 |
| 1900            | Body        | 21.4              | 1.551                     | 53.249                        | 1.52                             | 53.3                                 | 2.04                   | -0.10                      | ±5        | Apr. 22, 2013 |
| 1900            | Body        | 21.5              | 1.555                     | 53.533                        | 1.52                             | 53.3                                 | 2.04                   | -0.10                      | ±5        | Apr. 30, 2013 |
| 2450            | Body        | 21.3              | 1.949                     | 51.497                        | 1.95                             | 52.7                                 | -0.05                  | -2.28                      | ±5        | Apr. 30, 2013 |
| 5200            | Body        | 21.5              | 5.297                     | 49.185                        | 5.30                             | 49.0                                 | -0.06                  | 0.38                       | ±5        | Apr. 30, 2013 |
| 5800            | Body        | 21.5              | 6.127                     | 47.784                        | 6.00                             | 48.2                                 | 2.12                   | -0.86                      | ±5        | Apr. 30, 2013 |

**Table 6.2 Measuring Results for Simulating Liquid**

## 7. SAR System Verification

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

### 7.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 7.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

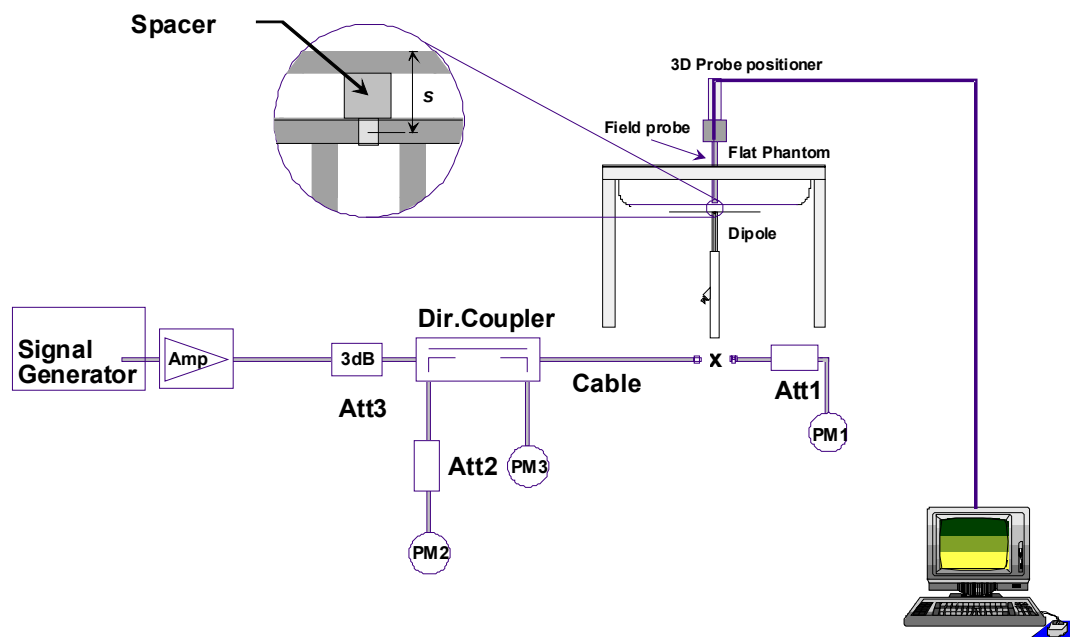


Fig 7.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole


**Fig 7.2 Photo of Dipole Setup**

### 7.3 SAR System Verification Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Table 7.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

| Date          | Frequency (MHz) | Liquid Type | Power fed onto reference dipole (mW) | Targeted SAR <sub>1g</sub> (W/kg) | Measured SAR <sub>1g</sub> (W/kg) | Normalized SAR <sub>1g</sub> (W/kg) | Deviation (%) |
|---------------|-----------------|-------------|--------------------------------------|-----------------------------------|-----------------------------------|-------------------------------------|---------------|
| Apr. 24, 2013 | 835             | Head        | 250                                  | 9.40                              | 2.33                              | 9.32                                | -0.85         |
| Apr. 23, 2013 | 1900            | Head        | 250                                  | 40.3                              | 9.99                              | 39.96                               | -0.84         |
| Apr. 29, 2013 | 2450            | Head        | 250                                  | 54.8                              | 13.5                              | 54                                  | -1.46         |
| Apr. 29, 2013 | 5200            | Head        | 100                                  | 78.1                              | 8.18                              | 81.8                                | 4.74          |
| Apr. 29, 2013 | 5800            | Head        | 100                                  | 76.9                              | 7.93                              | 79.3                                | 3.12          |
| Apr. 21, 2013 | 835             | Body        | 250                                  | 9.42                              | 2.25                              | 9                                   | -4.46         |
| Apr. 30, 2013 | 835             | Body        | 250                                  | 9.42                              | 2.24                              | 8.96                                | -4.88         |
| Apr. 22, 2013 | 1900            | Body        | 250                                  | 41.8                              | 10.3                              | 41.2                                | -1.44         |
| Apr. 30, 2013 | 1900            | Body        | 250                                  | 41.8                              | 10.4                              | 41.2                                | -1.44         |
| Apr. 30, 2013 | 2450            | Body        | 250                                  | 52.3                              | 13.1                              | 52.4                                | 0.19          |
| Apr. 30, 2013 | 5200            | Body        | 100                                  | 76.1                              | 7.69                              | 76.9                                | 1.05          |
| Apr. 30, 2013 | 5800            | Body        | 100                                  | 77.0                              | 8.16                              | 81.6                                | 5.97          |


**Table 7.1 Target and Measurement SAR after Normalized**

## 8. EUT Testing Position

This EUT was tested in ten different positions. They are right cheek/right tilted/left cheek/left tilted for Head, Front/Back/Right Side/Left Side/Top Side/Bottom Side of the EUT with phantom 1 cm gap, as illustrated below, please refer to Appendix D for the test setup photos.

### 8.1 Define two imaginary lines on the handset

- The vertical centerline passes through two points on the front side of the handset - the midpoint of the width  $w_t$  of the handset at the level of the acoustic output, and the midpoint of the width  $w_b$  of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

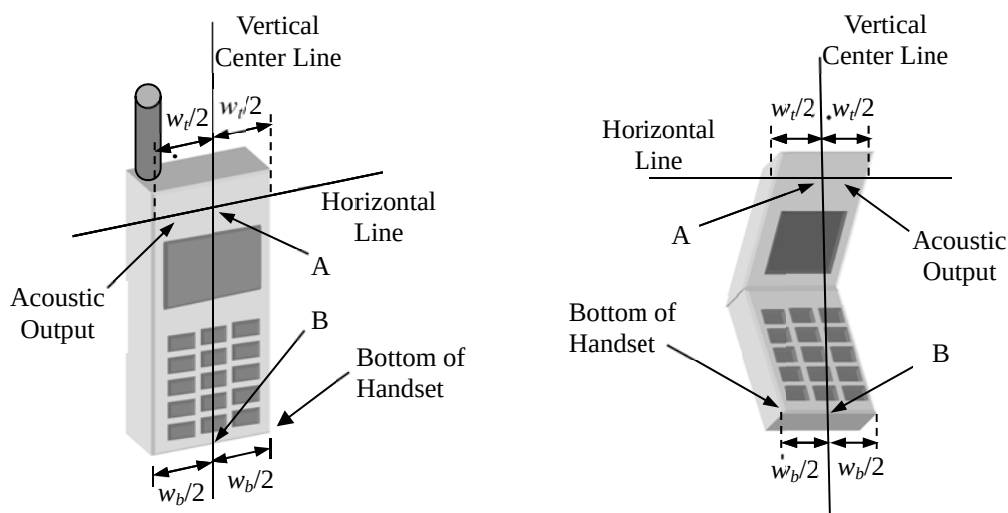


**Fig 8.1 Illustration for Handset Vertical and Horizontal Reference Lines**



## 8.2 Cheek Position


- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 8.2).

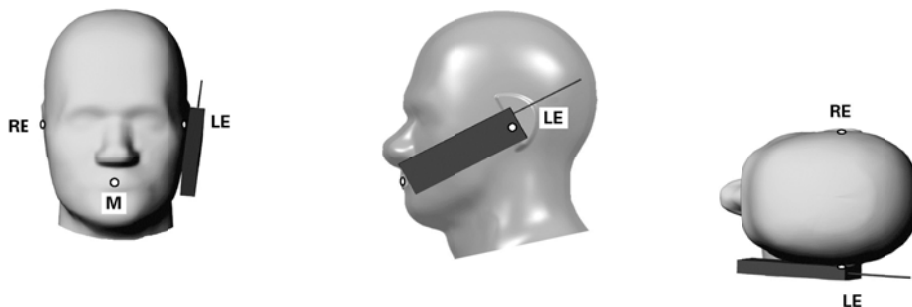

**Fig 8.2 Illustration for Cheek Position**

## 8.3 Tilted Position


- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 8.3).

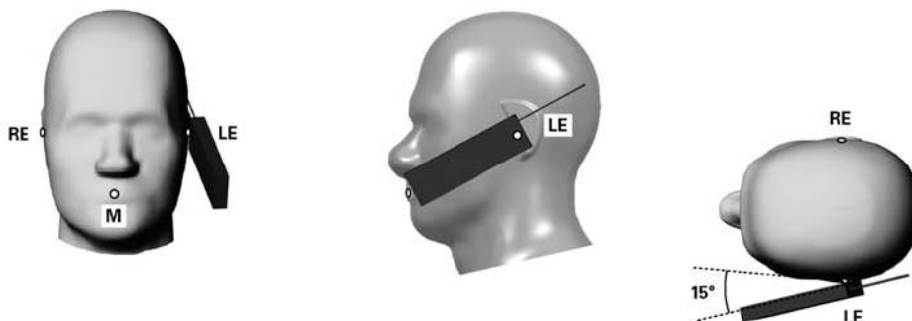

**Fig 8.3 Illustration for Tilted Position**

### **8.4 Body Worn Position**

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 1 cm.

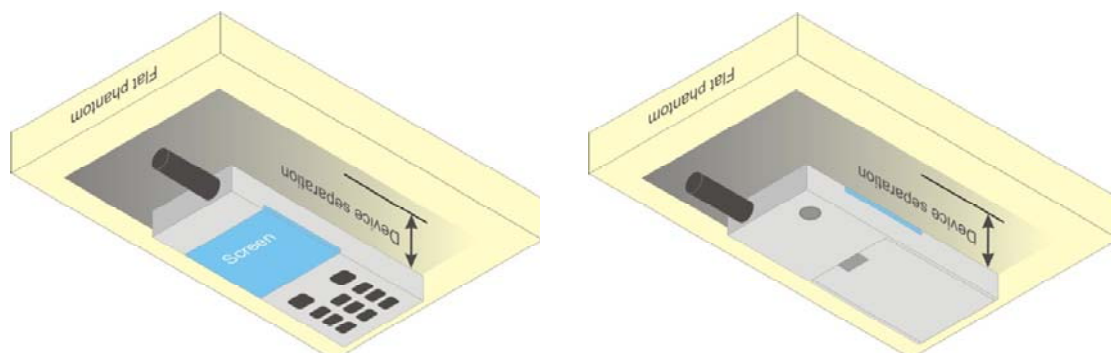

**Fig 8.4 Illustration for Body Worn Position**

### **8.5 Hotspot Position**

- (a) To position the device parallel to the phantom surface with all sides and either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device and the flat phantom to 1 cm.

#### **<EUT Setup Photos>**

Please refer to Appendix D for the test setup photos.

## 9. Measurement Procedures

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### 9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

## 9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

## 9.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01 quoted below.

For any secondary peaks found in the area scan which are within 2 dB of the maximum peak and are not within this zoom scan, the zoom scan should be repeated

|                                                                                                                                                                                                                                                                                                             |                                    |                                                                                      | $\leq 3$ GHz                                                                                                                                                                                                                                                           | $> 3$ GHz                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface                                                                                                                                                                                                      |                                    |                                                                                      | $5 \pm 1$ mm                                                                                                                                                                                                                                                           | $\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm                            |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location                                                                                                                                                                                                                   |                                    |                                                                                      | $30^\circ \pm 1^\circ$                                                                                                                                                                                                                                                 | $20^\circ \pm 1^\circ$                                                        |
| Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$                                                                                                                                                                                                                                 |                                    |                                                                                      | $\leq 2$ GHz: $\leq 15$ mm<br>2 – 3 GHz: $\leq 12$ mm                                                                                                                                                                                                                  | 3 – 4 GHz: $\leq 12$ mm<br>4 – 6 GHz: $\leq 10$ mm                            |
|                                                                                                                                                                                                                                                                                                             |                                    |                                                                                      | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |                                                                               |
| Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$                                                                                                                                                                                                                                 |                                    |                                                                                      | $\leq 2$ GHz: $\leq 8$ mm<br>2 – 3 GHz: $\leq 5$ mm*                                                                                                                                                                                                                   | 3 – 4 GHz: $\leq 5$ mm*<br>4 – 6 GHz: $\leq 4$ mm*                            |
| Maximum zoom scan spatial resolution, normal to phantom surface                                                                                                                                                                                                                                             | uniform grid: $\Delta z_{Zoom}(n)$ |                                                                                      | $\leq 5$ mm                                                                                                                                                                                                                                                            | 3 – 4 GHz: $\leq 4$ mm<br>4 – 5 GHz: $\leq 3$ mm<br>5 – 6 GHz: $\leq 2$ mm    |
|                                                                                                                                                                                                                                                                                                             | graded grid                        | $\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface | $\leq 4$ mm                                                                                                                                                                                                                                                            | 3 – 4 GHz: $\leq 3$ mm<br>4 – 5 GHz: $\leq 2.5$ mm<br>5 – 6 GHz: $\leq 2$ mm  |
|                                                                                                                                                                                                                                                                                                             |                                    | $\Delta z_{Zoom}(n>1)$ : between subsequent points                                   | $\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$                                                                                                                                                                                                                                  |                                                                               |
| Minimum zoom scan volume                                                                                                                                                                                                                                                                                    | x, y, z                            |                                                                                      | $\geq 30$ mm                                                                                                                                                                                                                                                           | 3 – 4 GHz: $\geq 28$ mm<br>4 – 5 GHz: $\geq 25$ mm<br>5 – 6 GHz: $\geq 22$ mm |
| Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.                                                                                                                                                           |                                    |                                                                                      |                                                                                                                                                                                                                                                                        |                                                                               |
| * When zoom scan is required and the <u>reported</u> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. |                                    |                                                                                      |                                                                                                                                                                                                                                                                        |                                                                               |

#### **9.4 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

#### **9.5 SAR Averaged Methods**

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

#### **9.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

## 10. Conducted RF Output Power (Unit: dBm)

### <CDMA2000 Conducted Power>

#### Note:

- Referring to KDB 941225 D01, the data device SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps). If 1xRTT and Ev-Do Rev A (RETAP 4096 bits) power is less than 1/4dB higher than Re v0, SAR tests with those settings are not necessary.
- According to KDB 941225 D01, Head SAR for RC1+SO55 is not required because the maximum average output power of RC1 is less than 1/4 dB higher than RC3+SO55.
- Referring to KDB 941225 D01, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps). If 1xRTT and Ev-Do Rev A (RETAP 4096 bits) power is less than 1/4dB higher than Re v0, SAR tests with those settings are not necessary.
- Considering VOIP capability, EVDO Rev A SAR was repeated on the worst position of 1xRTT head SAR and body SAR.

### <1xRTT>

| Band                    | CDMA2000 BC0          |        |        | CDMA2000 BC1          |       |         | CDMA2000 BC10         |       |       |
|-------------------------|-----------------------|--------|--------|-----------------------|-------|---------|-----------------------|-------|-------|
| Channel                 | 1013                  | 384    | 777    | 25                    | 600   | 1175    | 476                   | 580   | 684   |
| Frequency               | 824.7                 | 836.52 | 848.31 | 1851.25               | 1880  | 1908.75 | 817.9                 | 820.5 | 823.1 |
| 1x Voice Mode           | Full Power (25dBm)    |        |        | Full Power (24dBm)    |       |         | Full Power (25dBm)    |       |       |
| 1xRTT RC1 SO55          | 24.73                 | 24.85  | 24.82  | 23.72                 | 23.77 | 23.48   | 24.77                 | 24.85 | 24.80 |
| 1xRTT RC3 SO55          | 24.70                 | 24.81  | 24.80  | 23.62                 | 23.72 | 23.46   | 24.74                 | 24.83 | 24.78 |
| 1xRTT RC3 SO32(+ F-SCH) | 24.68                 | 24.84  | 24.83  | 23.68                 | 23.76 | 23.48   | 24.73                 | 24.82 | 24.74 |
| 1xRTT RC3 SO32(+SCH)    | 24.66                 | 24.75  | 24.72  | 23.58                 | 23.69 | 23.48   | 24.74                 | 24.82 | 24.76 |
| 1x Voice Mode           | Reduced Power (17dBm) |        |        | Reduced Power (17dBm) |       |         | Reduced Power (17dBm) |       |       |
| 1xRTT RC1 SO55          | 16.91                 | 16.93  | 16.58  | 16.56                 | 16.92 | 16.83   | 16.75                 | 16.96 | 16.90 |
| 1xRTT RC3 SO55          | 16.91                 | 16.92  | 16.71  | 16.60                 | 16.82 | 16.82   | 16.78                 | 16.95 | 16.91 |
| 1xRTT RC3 SO32(+ F-SCH) | 16.90                 | 16.91  | 16.58  | 16.63                 | 16.80 | 16.74   | 16.73                 | 16.93 | 16.88 |
| 1xRTT RC3 SO32(+SCH)    | 16.83                 | 16.87  | 16.40  | 16.69                 | 16.91 | 16.73   | 16.60                 | 16.91 | 16.90 |

### <1xEVDO>

| Band                         | CDMA2000 BC0       |        |        | CDMA2000 BC1       |       |         | CDMA2000 BC10      |       |       |
|------------------------------|--------------------|--------|--------|--------------------|-------|---------|--------------------|-------|-------|
| Channel                      | 1013               | 384    | 777    | 25                 | 600   | 1175    | 476                | 580   | 684   |
| Frequency                    | 824.7              | 836.52 | 848.31 | 1851.25            | 1880  | 1908.75 | 817.9              | 820.5 | 823.1 |
| EVDO data mode               | Full Power (25dBm) |        |        | Full Power (24dBm) |       |         | Full Power (25dBm) |       |       |
| EVDO Rev.0 1xEVDO RTAP 153.6 | 24.68              | 24.83  | 24.81  | 23.58              | 23.68 | 23.50   | 24.73              | 24.84 | 24.78 |
| EVDO Rev.A 1xEVDO RETAP 4096 | 24.71              | 24.82  | 24.80  | 23.55              | 23.64 | 23.43   | 24.71              | 24.79 | 24.71 |



**<LTE Conducted Power>**

**Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each *required test channel*.
4. Per KDB 941225 D05v02, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
5. 16QAM output power for each RB allocation configuration is not > ½ dB higher than the same configuration in QPSK
6. Smaller bandwidth output power for each RB allocation configuration is not > ½ dB higher than the same configuration in the largest supported bandwidth



**<LTE Band 25 Conducted Power>**

| BW<br>[MHz]     | Mod / RB<br>(Size - Offset) | Full Power (24.5dBm) |        |         |             |                 |        |         | Reduced Power (18dBm) |        |         |             |                 |        |         |
|-----------------|-----------------------------|----------------------|--------|---------|-------------|-----------------|--------|---------|-----------------------|--------|---------|-------------|-----------------|--------|---------|
|                 |                             | Average Power. (dBm) |        |         | 3GPP<br>MPR | MPR Result (dB) |        |         | Average Power. (dBm)  |        |         | 3GPP<br>MPR | MPR Result (dB) |        |         |
|                 |                             | Low Ch               | Mid Ch | High Ch |             | Low Ch          | Mid Ch | High Ch | Low Ch                | Mid Ch | High Ch |             | Low Ch          | Mid Ch | High Ch |
| Channel         |                             | 26090                | 26365  | 26640   |             | 26090           | 26365  | 26640   | 26090                 | 26365  | 26640   |             | 26090           | 26365  | 26640   |
| Frequency (MHz) |                             | 1855                 | 1882.5 | 1910    |             | 1855            | 1882.5 | 1910    | 1855                  | 1882.5 | 1910    |             | 1855            | 1882.5 | 1910    |
| 10              | QPSK 1-0                    | 24.10                | 24.05  | 23.90   | 0           | 0.13            | 0.22   | 0.25    | 17.60                 | 17.57  | 17.59   | 0           | 0.03            | 0.12   | 0.09    |
| 10              | QPSK 1-24                   | 24.20                | 23.96  | 24.14   |             | 0.03            | 0.31   | 0.01    | 17.62                 | 17.68  | 17.59   |             | 0.01            | 0.01   | 0.09    |
| 10              | QPSK 1-49                   | 24.23                | 24.27  | 24.15   |             | 0.00            | 0.00   | 0.00    | 17.63                 | 17.69  | 17.68   |             | 0.00            | 0.00   | 0.00    |
| 10              | QPSK 25-0                   | 22.90                | 22.92  | 23.03   | ≤ 1         | 1.33            | 1.35   | 1.12    | 16.60                 | 16.61  | 16.70   | ≤ 1         | 1.03            | 1.08   | 0.98    |
| 10              | QPSK 25-12                  | 23.00                | 22.95  | 23.11   |             | 1.23            | 1.32   | 1.04    | 16.56                 | 16.56  | 16.68   |             | 1.07            | 1.13   | 1.00    |
| 10              | QPSK 25-24                  | 23.05                | 23.15  | 23.12   |             | 1.18            | 1.12   | 1.03    | 16.55                 | 16.53  | 16.81   |             | 1.08            | 1.16   | 0.87    |
| 10              | QPSK 50-0                   | 22.84                | 22.95  | 22.92   | ≤ 1         | 1.39            | 1.32   | 1.23    | 16.51                 | 16.51  | 16.70   | ≤ 1         | 1.12            | 1.18   | 0.98    |
| 10              | 16QAM 1-0                   | 23.21                | 22.77  | 23.15   |             | 1.02            | 1.50   | 1.00    | 16.53                 | 16.57  | 16.46   |             | 1.10            | 1.12   | 1.22    |
| 10              | 16QAM 1-24                  | 23.10                | 23.13  | 23.03   |             | 1.13            | 1.14   | 1.12    | 16.81                 | 16.58  | 16.64   |             | 0.82            | 1.11   | 1.04    |
| 10              | 16QAM 1-49                  | 23.31                | 23.28  | 23.23   | ≤ 2         | 0.92            | 0.99   | 0.92    | 16.53                 | 16.22  | 16.98   | ≤ 2         | 1.10            | 1.47   | 0.70    |
| 10              | 16QAM 25-0                  | 21.87                | 21.94  | 21.95   |             | 2.36            | 2.33   | 2.20    | 15.72                 | 15.61  | 15.76   |             | 1.91            | 2.08   | 1.92    |
| 10              | 16QAM 25-12                 | 21.90                | 21.91  | 21.96   |             | 2.33            | 2.36   | 2.19    | 15.68                 | 15.53  | 15.64   |             | 1.95            | 2.16   | 2.04    |
| 10              | 16QAM 25-24                 | 21.84                | 21.87  | 22.15   | ≤ 2         | 2.39            | 2.40   | 2.00    | 15.68                 | 15.71  | 15.85   | ≤ 2         | 1.95            | 1.98   | 1.83    |
| 10              | 16QAM 50-0                  | 21.74                | 21.72  | 21.85   |             | 2.49            | 2.55   | 2.30    | 15.63                 | 15.50  | 15.63   |             | 2.00            | 2.19   | 2.05    |
| Channel         |                             | 26065                | 26365  | 26665   |             | 26065           | 26365  | 26665   | 26065                 | 26365  | 26665   |             | 26065           | 26365  | 26665   |
| Frequency (MHz) |                             | 1852.5               | 1882.5 | 1912.5  |             | 1852.5          | 1882.5 | 1912.5  | 1852.5                | 1882.5 | 1912.5  |             | 1852.5          | 1882.5 | 1912.5  |
| 5               | QPSK 1-0                    | 24.07                | 24.05  | 24.21   | 0           | 0.01            | 0.03   | 0.18    | 17.68                 | 17.65  | 17.92   | 0           | 0.00            | 0.10   | 0.00    |
| 5               | QPSK 1-12                   | 23.93                | 24.08  | 24.39   |             | 0.15            | 0.00   | 0.00    | 17.60                 | 17.60  | 17.81   |             | 0.08            | 0.15   | 0.11    |
| 5               | QPSK 1-24                   | 24.08                | 24.05  | 23.96   |             | 0.00            | 0.03   | 0.43    | 17.55                 | 17.75  | 17.71   |             | 0.13            | 0.00   | 0.21    |
| 5               | QPSK 12-0                   | 23.02                | 23.00  | 23.29   | ≤ 1         | 1.06            | 1.08   | 1.10    | 16.67                 | 16.63  | 16.90   | ≤ 1         | 1.01            | 1.12   | 1.02    |
| 5               | QPSK 12-6                   | 23.03                | 23.15  | 23.34   |             | 1.05            | 0.93   | 1.05    | 16.57                 | 16.64  | 16.93   |             | 1.11            | 1.11   | 0.99    |
| 5               | QPSK 12-11                  | 23.12                | 23.17  | 23.23   |             | 0.96            | 0.91   | 1.16    | 16.65                 | 16.66  | 16.93   |             | 1.03            | 1.09   | 0.99    |
| 5               | QPSK 25-0                   | 22.89                | 22.75  | 23.26   | ≤ 1         | 1.19            | 1.33   | 1.13    | 16.53                 | 16.57  | 16.83   | ≤ 1         | 1.15            | 1.18   | 1.09    |
| 5               | 16QAM 1-0                   | 22.79                | 22.79  | 23.46   |             | 1.29            | 1.29   | 0.93    | 16.64                 | 16.86  | 16.76   |             | 1.04            | 0.89   | 1.16    |
| 5               | 16QAM 1-12                  | 22.92                | 23.19  | 23.47   |             | 1.16            | 0.89   | 0.92    | 16.90                 | 16.79  | 16.61   |             | 0.78            | 0.96   | 1.31    |
| 5               | 16QAM 1-24                  | 23.18                | 22.97  | 22.71   | ≤ 2         | 0.90            | 1.11   | 1.68    | 16.84                 | 16.81  | 16.38   | ≤ 2         | 0.84            | 0.94   | 1.54    |
| 5               | 16QAM 12-0                  | 22.06                | 22.02  | 22.32   |             | 2.02            | 2.06   | 2.07    | 15.65                 | 15.61  | 15.88   |             | 2.03            | 2.14   | 2.04    |
| 5               | 16QAM 12-6                  | 22.15                | 22.25  | 22.35   |             | 1.93            | 1.83   | 2.04    | 15.56                 | 15.69  | 15.86   |             | 2.12            | 2.06   | 2.06    |
| 5               | 16QAM 12-11                 | 22.03                | 22.15  | 22.32   | ≤ 2         | 2.05            | 1.93   | 2.07    | 15.76                 | 15.65  | 15.80   | ≤ 2         | 1.92            | 2.10   | 2.12    |
| 5               | 16QAM 25-0                  | 21.85                | 21.85  | 22.21   |             | 2.23            | 2.23   | 2.18    | 15.64                 | 15.73  | 15.85   |             | 2.04            | 2.02   | 2.07    |
| Channel         |                             | 26055                | 26365  | 26675   |             | 26055           | 26365  | 26675   | 26055                 | 26365  | 26675   |             | 26055           | 26365  | 26675   |
| Frequency (MHz) |                             | 1851.5               | 1882.5 | 1913.5  |             | 1851.5          | 1882.5 | 1913.5  | 1851.5                | 1882.5 | 1913.5  |             | 1851.5          | 1882.5 | 1913.5  |
| 3               | QPSK 1-0                    | 24.03                | 24.03  | 24.30   | 0           | 0.23            | 0.09   | 0.04    | 17.66                 | 17.55  | 17.94   | 0           | 0.06            | 0.16   | 0.00    |
| 3               | QPSK 1-7                    | 24.26                | 24.00  | 24.34   |             | 0.00            | 0.12   | 0.00    | 17.59                 | 17.65  | 17.74   |             | 0.13            | 0.06   | 0.20    |
| 3               | QPSK 1-14                   | 23.82                | 24.12  | 24.19   |             | 0.44            | 0.00   | 0.15    | 17.72                 | 17.71  | 17.75   |             | 0.00            | 0.00   | 0.19    |
| 3               | QPSK 8-0                    | 23.05                | 23.08  | 23.36   | ≤ 1         | 1.21            | 1.04   | 0.98    | 16.66                 | 16.72  | 16.78   | ≤ 1         | 1.06            | 0.99   | 1.16    |
| 3               | QPSK 8-4                    | 23.01                | 23.03  | 23.34   |             | 1.25            | 1.09   | 1.00    | 16.57                 | 16.82  | 16.85   |             | 1.15            | 0.89   | 1.09    |
| 3               | QPSK 8-7                    | 23.05                | 23.04  | 23.22   |             | 1.21            | 1.08   | 1.12    | 16.62                 | 16.73  | 16.90   |             | 1.10            | 0.98   | 1.04    |
| 3               | QPSK 15-0                   | 23.04                | 22.95  | 23.23   | ≤ 1         | 1.22            | 1.17   | 1.11    | 16.58                 | 16.58  | 16.90   | ≤ 1         | 1.14            | 1.13   | 1.04    |
| 3               | 16QAM 1-0                   | 22.68                | 23.15  | 23.37   |             | 1.58            | 0.97   | 0.97    | 16.52                 | 16.86  | 16.93   |             | 1.20            | 0.85   | 1.01    |
| 3               | 16QAM 1-7                   | 23.07                | 22.61  | 23.49   |             | 1.19            | 1.51   | 0.85    | 16.51                 | 16.35  | 16.51   |             | 1.21            | 1.36   | 1.43    |
| 3               | 16QAM 1-14                  | 22.90                | 23.20  | 22.93   | ≤ 2         | 1.36            | 0.92   | 1.41    | 16.25                 | 16.66  | 16.59   | ≤ 2         | 1.47            | 1.05   | 1.35    |
| 3               | 16QAM 8-0                   | 22.00                | 21.96  | 22.47   |             | 2.26            | 2.16   | 1.87    | 15.63                 | 15.54  | 15.89   |             | 2.09            | 2.17   | 2.05    |
| 3               | 16QAM 8-4                   | 21.97                | 22.15  | 22.27   |             | 2.29            | 1.97   | 2.07    | 15.51                 | 15.65  | 15.64   |             | 2.21            | 2.06   | 2.30    |
| 3               | 16QAM 8-7                   | 21.97                | 21.88  | 22.15   | ≤ 2         | 2.29            | 2.24   | 2.19    | 15.46                 | 15.62  | 15.69   | ≤ 2         | 2.26            | 2.09   | 2.25    |
| 3               | 16QAM 15-0                  | 22.08                | 22.14  | 22.24   |             | 2.18            | 1.98   | 2.10    | 15.82                 | 15.63  | 15.73   |             | 1.90            | 2.08   | 2.21    |
| Channel         |                             | 26047                | 26365  | 26683   |             | 26047           | 26365  | 26683   | 26047                 | 26365  | 26683   |             | 26047           | 26365  | 26683   |
| Frequency (MHz) |                             | 1850.7               | 1882.5 | 1914.3  |             | 1850.7          | 1882.5 | 1914.3  | 1850.7                | 1882.5 | 1914.3  |             | 1850.7          | 1882.5 | 1914.3  |
| 1.4             | QPSK 1-0                    | 24.01                | 24.12  | 24.33   | 0           | 0.34            | 0.17   | 0.00    | 17.66                 | 17.56  | 17.79   | 0           | 0.02            | 0.33   | 0.05    |
| 1.4             | QPSK 1-2                    | 24.35                | 24.21  | 24.16   |             | 0.00            | 0.08   | 0.17    | 17.68                 | 17.89  | 17.81   |             | 0.00            | 0.00   | 0.03    |
| 1.4             | QPSK 1-5                    | 24.04                | 24.29  | 23.97   |             | 0.31            | 0.00   | 0.36    | 17.58                 | 17.75  | 17.69   |             | 0.10            | 0.14   | 0.15    |
| 1.4             | QPSK 3-0                    | 24.25                | 24.14  | 24.30   | ≤ 1         | 0.10            | 0.15   | 0.03    | 17.65                 | 17.77  | 17.84   | ≤ 1         | 0.03            | 0.12   | 0.00    |
| 1.4             | QPSK 3-1                    | 23.88                | 24.06  | 24.14   |             | 0.47            | 0.23   | 0.19    | 17.57                 | 17.71  | 17.82   |             | 0.11            | 0.18   | 0.02    |
| 1.4             | QPSK 3-2                    | 23.90                | 24.01  | 24.11   |             | 0.45            | 0.28   | 0.22    | 17.62                 | 17.68  | 17.77   |             | 0.06            | 0.21   | 0.07    |
| 1.4             | QPSK 6-0                    | 23.13                | 23.20  | 23.19   | ≤ 1         | 1.22            | 1.09   | 1.14    | 16.66                 | 16.75  | 16.80   | ≤ 1         | 1.02            | 1.14   | 1.04    |
| 1.4             | 16QAM 1-0                   | 23.30                | 22.99  | 23.34   |             | 1.05            | 1.30   | 0.99    | 16.31                 | 16.54  | 16.77   |             | 1.37            | 1.35   | 1.07    |
| 1.4             | 16QAM 1-2                   | 23.38                | 22.93  | 23.25   |             | 0.97            | 1.36   | 1.08    | 16.84                 | 16.62  | 16.50   |             | 0.84            | 1.27   | 1.34    |
| 1.4             | 16QAM 1-5                   | 23.23                | 23.17  | 22.82   | ≤ 2         | 1.12            | 1.12   | 1.51    | 16.66                 | 16.88  | 16.59   | ≤ 2         | 1.02            | 1.01   | 1.25    |
| 1.4             | 16QAM 3-0                   | 22.92                | 23.16  | 23.30   |             | 1.43            | 1.13   | 1.03    | 16.52                 | 16.78  | 16.88   |             | 1.16            | 1.11   | 0.96    |
| 1.4             | 16QAM 3-1                   | 23.33                | 23.09  | 23.29   |             | 1.02            | 1.20   | 1.04    | 16.74                 | 16.62  | 16.77   |             | 0.94            | 1.27   | 1.07    |
| 1.4             | 16QAM 3-2                   | 22.97                | 23.15  | 23.08   | ≤ 2         | 1.38            | 1.14   | 1.25    | 16.66                 | 16.56  | 16.86   | ≤ 2         | 1.02            | 1.33   | 0.98    |
| 1.4             | 16QAM 6-0                   | 22.01                | 22.05  | 22.21   |             | 2.34            | 2.24   | 2.12    | 15.57                 | 15.72  | 15.89   |             | 2.11            | 2.17   | 1.95    |



**<WLAN 2.4GHz Band Conducted Power>**

| WLAN 2.4GHz Band 802.11b Average Power (dBm) |                 |                 |       |       |       |
|----------------------------------------------|-----------------|-----------------|-------|-------|-------|
| Channel                                      | Frequency (MHz) | Data Rate (bps) |       |       |       |
|                                              |                 | 1M              | 2M    | 5.5M  | 11M   |
| CH 01                                        | 2412            | 13.42           | 13.33 | 13.86 | 13.43 |
| CH 06                                        | 2437            | 13.77           | 13.85 | 14.22 | 14.22 |
| CH 11                                        | 2462            | 14.38           | 14.36 | 14.23 | 14.32 |

| WLAN 2.4GHz Band 802.11g Average Power (dBm) |                 |                 |       |       |       |       |       |       |       |
|----------------------------------------------|-----------------|-----------------|-------|-------|-------|-------|-------|-------|-------|
| Channel                                      | Frequency (MHz) | Data Rate (bps) |       |       |       |       |       |       |       |
|                                              |                 | 6M              | 9M    | 12M   | 18M   | 24M   | 36M   | 48M   | 54M   |
| CH 01                                        | 2412            | 11.85           | 11.80 | 11.78 | 12.08 | 12.01 | 12.82 | 13.24 | 13.38 |
| CH 06                                        | 2437            | 12.06           | 12.24 | 12.40 | 12.68 | 12.62 | 13.50 | 13.90 | 13.94 |
| CH 11                                        | 2462            | 11.90           | 12.06 | 12.18 | 12.48 | 12.45 | 13.29 | 13.74 | 13.90 |

| WLAN 2.4GHz Band 802.11n (HT 20) Average Power (dBm) |                 |           |       |       |       |       |       |       |       |
|------------------------------------------------------|-----------------|-----------|-------|-------|-------|-------|-------|-------|-------|
| Channel                                              | Frequency (MHz) | MCS Index |       |       |       |       |       |       |       |
|                                                      |                 | MCS0      | MCS1  | MCS2  | MCS3  | MCS4  | MCS5  | MCS6  | MCS7  |
| CH 01                                                | 2412            | 10.75     | 11.14 | 11.23 | 11.49 | 11.92 | 12.26 | 12.19 | 12.36 |
| CH 06                                                | 2437            | 10.99     | 11.45 | 11.79 | 12.01 | 12.53 | 12.84 | 12.72 | 12.81 |
| CH 11                                                | 2462            | 11.25     | 11.71 | 12.03 | 12.31 | 12.78 | 13.20 | 13.20 | 13.35 |

**Note:**

1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate
3. Per KDB 248227 D01 v01r02, 11g and 11n-HT20 output power is less than 1/4dB higher than 11b mode, thus the SAR can be excluded. 2.4GHz WLAN SAR was tested on 802.11b 1Mbps.

**<Bluetooth Conducted Power>**

| Bluetooth Average Power (dBm) |                 |                 |       |       |       |       |       |       |       |       |
|-------------------------------|-----------------|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Channel                       | Frequency (MHz) | Data Rate (bps) |       |       |       |       |       |       |       |       |
|                               |                 | DH1             | DH3   | DH5   | 2DH1  | 2DH3  | 2DH5  | 3DH1  | 3DH3  | 3DH5  |
| CH 00                         | 2402            | -1.67           | -1.49 | -1.54 | -2.79 | -2.76 | -2.75 | -2.93 | -2.94 | -2.94 |
| CH 39                         | 2441            | 0.46            | 0.66  | 0.79  | -0.59 | -0.60 | -0.55 | -0.79 | -0.69 | -0.69 |
| CH 78                         | 2480            | -0.92           | -0.90 | -0.74 | -2.11 | -2.16 | -2.21 | -2.36 | -2.15 | -2.31 |

| Channel | Frequency (MHz) | Average power (dBm) |
|---------|-----------------|---------------------|
|         |                 | Mode                |
|         |                 | BT v4.0 LE, GFSK    |
| CH 00   | 2402            | -1.74               |
| CH 19   | 2440            | 0.44                |
| CH 39   | 2480            | -0.49               |

**Note:**

1. Per KDB 447498 D01v05, the 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:  

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
for 1-g SAR.
  - f(GHz) is the RF channel transmit frequency in GHz
  - Power and distance are rounded to the nearest mW and mm before calculation
  - The result is rounded to one decimal place for comparison

| Bluetooth Max Power (dBm) | mW   | Test Distance (mm) | Frequency (GHz) | exclusion thresholds |
|---------------------------|------|--------------------|-----------------|----------------------|
| 1                         | 1.26 | 5                  | 2.48            | 0.40                 |

2. Per KDB 447498 D01v05 exclusion thresholds is  $0.40 < 3$ , RF exposure evaluation is not required.

**<WLAN 5GHz Band Conducted Power>**


| WLAN 5GHz 802.11a Average Power (dBm) |                 |                 |       |        |        |        |        |        |        |
|---------------------------------------|-----------------|-----------------|-------|--------|--------|--------|--------|--------|--------|
| Channel                               | Frequency (MHz) | Data Rate (bps) |       |        |        |        |        |        |        |
|                                       |                 | 6Mbps           | 9Mbps | 12Mbps | 18Mbps | 24Mbps | 36Mbps | 48Mbps | 54Mbps |
| CH 36                                 | 5180            | 12.70           | 12.60 | 12.55  | 12.68  | 12.65  | 12.26  | 12.62  | 12.64  |
| CH 40                                 | 5200            | 12.23           | 11.95 | 11.97  | 11.37  | 10.46  | 11.26  | 11.41  | 11.56  |
| CH 44                                 | 5220            | 11.99           | 11.82 | 11.64  | 11.59  | 11.44  | 11.39  | 11.29  | 11.26  |
| CH 48                                 | 5240            | 12.33           | 12.21 | 12.07  | 11.95  | 11.62  | 11.47  | 11.41  | 11.04  |
| CH 149                                | 5745            | 11.21           | 11.19 | 11.20  | 11.11  | 11.12  | 10.90  | 10.85  | 10.77  |
| CH 153                                | 5765            | 11.29           | 11.13 | 11.09  | 11.14  | 11.10  | 11.12  | 11.16  | 11.17  |
| CH 157                                | 5785            | 11.13           | 11.10 | 11.05  | 10.90  | 10.89  | 11.10  | 11.10  | 11.08  |
| CH 161                                | 5805            | 10.82           | 11.06 | 11.03  | 10.85  | 10.85  | 11.08  | 11.01  | 10.69  |
| CH 165                                | 5825            | 11.20           | 11.03 | 11.10  | 10.94  | 10.96  | 11.18  | 11.08  | 11.17  |

| WLAN 5GHz 802.11n-HT20 Average Power (dBm) |                 |                 |       |       |       |       |       |       |       |
|--------------------------------------------|-----------------|-----------------|-------|-------|-------|-------|-------|-------|-------|
| Channel                                    | Frequency (MHz) | Data Rate (bps) |       |       |       |       |       |       |       |
|                                            |                 | MCS0            | MCS1  | MCS2  | MCS3  | MCS4  | MCS5  | MCS6  | MCS7  |
| CH 36                                      | 5180            | 11.64           | 11.38 | 11.40 | 11.39 | 11.59 | 11.48 | 11.48 | 11.57 |
| CH 40                                      | 5200            | 11.27           | 11.11 | 11.25 | 10.99 | 10.90 | 10.83 | 10.88 | 11.00 |
| CH 44                                      | 5220            | 11.02           | 10.97 | 10.83 | 10.85 | 10.74 | 10.60 | 10.29 | 10.66 |
| CH 48                                      | 5240            | 11.29           | 11.10 | 10.80 | 10.83 | 10.80 | 10.86 | 10.72 | 10.61 |
| CH 149                                     | 5745            | 11.17           | 10.39 | 10.20 | 10.37 | 10.84 | 10.72 | 10.64 | 10.60 |
| CH 153                                     | 5765            | 10.12           | 10.39 | 10.46 | 10.65 | 11.06 | 10.89 | 10.42 | 10.44 |
| CH 157                                     | 5785            | 10.62           | 10.89 | 10.80 | 10.75 | 10.73 | 10.63 | 10.48 | 10.33 |
| CH 161                                     | 5805            | 10.31           | 10.55 | 10.29 | 10.27 | 10.20 | 10.02 | 9.58  | 9.53  |
| CH 165                                     | 5825            | 10.29           | 10.42 | 10.28 | 10.78 | 11.09 | 10.45 | 10.35 | 10.24 |

**Note:**

1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate. 5GHz WLAN SAR was tested on 802.11a 6Mbps.

## 11. Exposure Positions Consideration

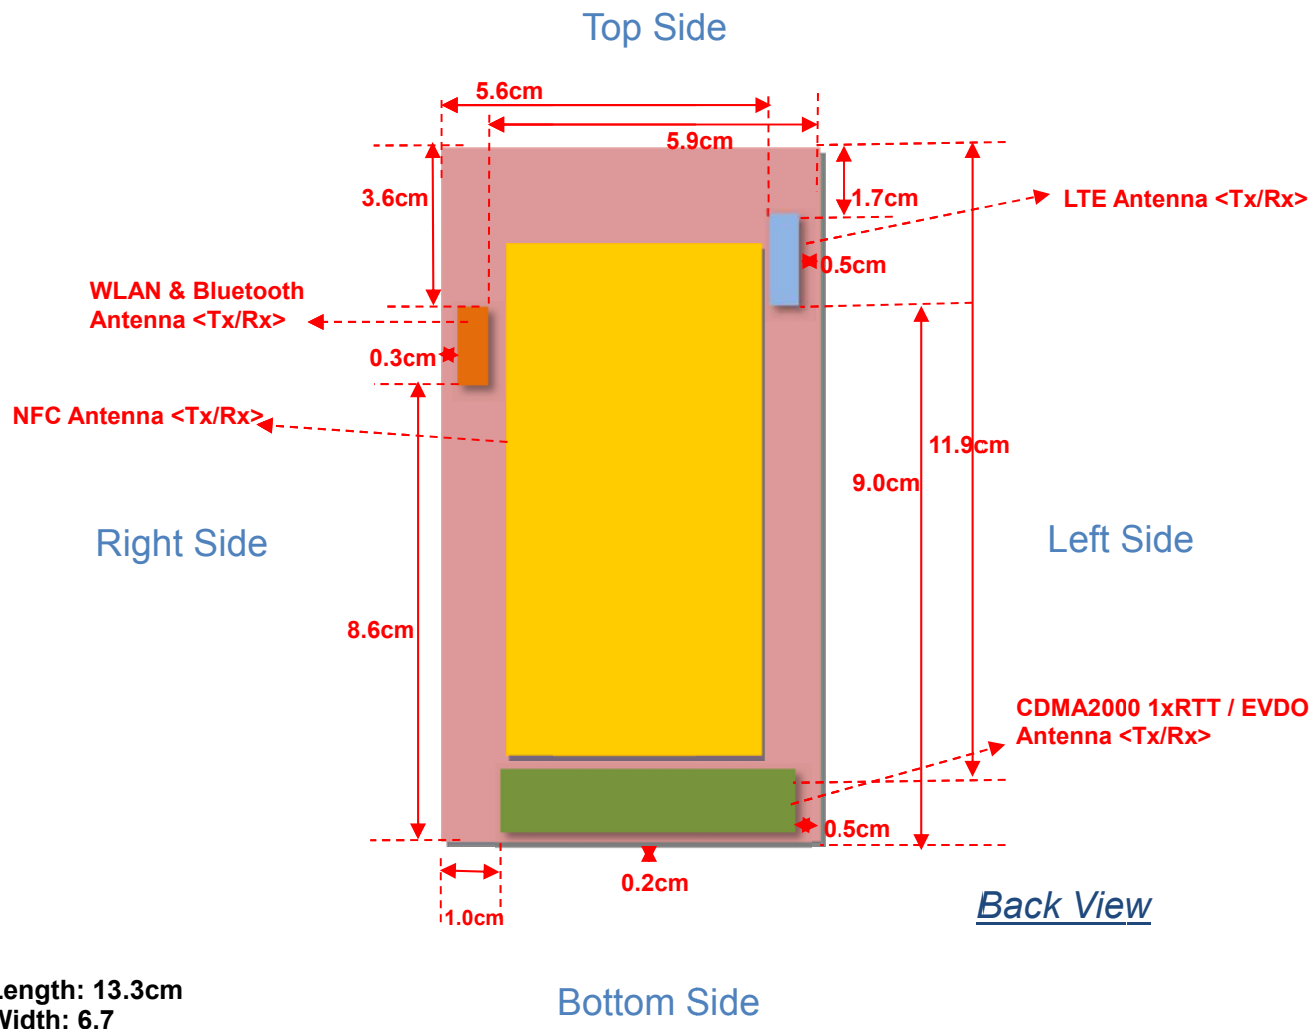

| Antennas                           | Wireless Interface                  |
|------------------------------------|-------------------------------------|
| LTE Antenna <Tx / Rx>              | LTE: band 25                        |
| CDMA2000 1xRTT / EVDO <Tx / Rx>    | CDMA2000 1xRTT and EVDO BC 0/1/10   |
| WLAN & Bluetooth Antenna <Tx / Rx> | WLAN 2.4GHz, WLAN 5GHz<br>Bluetooth |
| NFC Antenna <Tx / Rx>              | NFC                                 |

| Distance of the Antenna to the EUT surface/edge<br>Test distance: 10 mm |        |        |          |             |            |           |
|-------------------------------------------------------------------------|--------|--------|----------|-------------|------------|-----------|
| Antennas                                                                | Back   | Front  | Top Side | Bottom Side | Right Side | Left Side |
| CDMA 1xRTT / EVDO                                                       | ≤ 25mm | ≤ 25mm | 119mm    | ≤ 25mm      | ≤ 25mm     | ≤ 25mm    |
| LTE                                                                     | ≤ 25mm | ≤ 25mm | ≤ 25mm   | 90mm        | 56mm       | ≤ 25mm    |
| WLAN & Bluetooth                                                        | ≤ 25mm | ≤ 25mm | 36mm     | 86mm        | ≤ 25mm     | 59mm      |

| Positions for SAR tests; Hotspot mode<br>Test distance: 10 mm |      |       |          |             |            |           |
|---------------------------------------------------------------|------|-------|----------|-------------|------------|-----------|
| Antennas                                                      | Back | Front | Top Side | Bottom Side | Right Side | Left Side |
| CDMA 1xRTT / EVDO                                             | Yes  | Yes   | NO       | Yes         | Yes        | Yes       |
| LTE                                                           | Yes  | Yes   | Yes      | NO          | NO         | Yes       |
| WLAN & Bluetooth                                              | Yes  | Yes   | NO       | NO          | Yes        | NO        |

1. Head/Body-worn/Hotspot mode SAR assessments are required.
2. Referring to KDB 941225 D06 v01, when the overall device length and width are  $\geq 9\text{cm} \times 5\text{cm}$ , the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge
3. Per KDB 447498 D01v05, for handsets the *test separation distance* is determined by the smallest distance between the outer surface of the device and the user; which is 0mm for head SAR, 10mm for hotspot SAR, and 10mm for body-worn SAR.

## 12. SAR Test Results

### Note:

- Per KDB 447498 D01v05, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.  

$$\text{Scaling Factor} = \text{tune-up limit power (mW)} / \text{EUT RF power (mW)}, \text{ where tune-up limit is the maximum rated power among all production units.}$$

$$\text{Reported SAR (W/kg)} = \text{Measured SAR (W/kg)} * \text{Scaling Factor}$$
- Per KDB 447498 D01v05, for each exposure position, if the highest output channel reported SAR  $\leq 0.8\text{W/kg}$ , other channels SAR testing is not necessary.
- For Hotspot SAR testing, per KDB 941225 D06, for EUT dimension  $\geq 9\text{cm} \times 5\text{cm}$ , the test distance is 1cm. SAR must be measured for all surfaces and sides with a transmitting antenna located within 2.5cm from that surface or edge.
- Considering the possibility of VOIP operation, per KDB 941225 D01 1xEV-Do RevA (4096 bits) SAR for the head exposure positions and body-worn positions are performed.

### 12.1 Test Records for Head SAR Test

#### <CDMA SAR>

| Plot No. | Antenna    | Band          | Mode       | Test Position | Ch.  | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) | Reduced Power (dB) |
|----------|------------|---------------|------------|---------------|------|-------------|---------------------|---------------------|----------------|------------------|-----------------------------------|-----------------------------------|--------------------|
| 1        | 1xRTT/EVDO | CDMA2000 BC0  | RC3 SO55   | Right Cheek   | 384  | 836.52      | 24.81               | 25                  | 1.045          | -0.14            | 0.779                             | 0.814                             | 0                  |
| 2        | 1xRTT/EVDO | CDMA2000 BC0  | RC3 SO55   | Right Tilted  | 384  | 836.52      | 24.81               | 25                  | 1.045          | -0.0086          | 0.589                             | 0.615                             | 0                  |
| 3        | 1xRTT/EVDO | CDMA2000 BC0  | RC3 SO55   | Left Cheek    | 384  | 836.52      | 24.81               | 25                  | 1.045          | 0.18             | 0.719                             | 0.751                             | 0                  |
| 4        | 1xRTT/EVDO | CDMA2000 BC0  | RC3 SO55   | Left Tilted   | 384  | 836.52      | 24.81               | 25                  | 1.045          | 0.05             | 0.512                             | 0.535                             | 0                  |
| 5        | 1xRTT/EVDO | CDMA2000 BC0  | RC3 SO55   | Right Cheek   | 1013 | 824.7       | 24.7                | 25                  | 1.072          | -0.05            | 0.836                             | 0.896                             | 0                  |
| 6        | 1xRTT/EVDO | CDMA2000 BC0  | RC3 SO55   | Right Cheek   | 777  | 848.31      | 24.8                | 25                  | 1.047          | 0.0042           | 0.667                             | 0.698                             | 0                  |
| 7        | 1xRTT/EVDO | CDMA2000 BC0  | RETAP 4096 | Right Cheek   | 1013 | 824.7       | 24.71               | 25                  | 1.069          | -0.18            | 0.744                             | 0.795                             | 0                  |
| 8        | 1xRTT/EVDO | CDMA2000 BC1  | RC3 SO55   | Right Cheek   | 600  | 1880        | 23.72               | 24                  | 1.067          | -0.07            | 0.520                             | 0.555                             | 0                  |
| 9        | 1xRTT/EVDO | CDMA2000 BC1  | RC3 SO55   | Right Tilted  | 600  | 1880        | 23.72               | 24                  | 1.067          | 0.0071           | 0.174                             | 0.186                             | 0                  |
| 10       | 1xRTT/EVDO | CDMA2000 BC1  | RC3 SO55   | Left Cheek    | 600  | 1880        | 23.72               | 24                  | 1.067          | 0.024            | 0.508                             | 0.542                             | 0                  |
| 11       | 1xRTT/EVDO | CDMA2000 BC1  | RC3 SO55   | Left Tilted   | 600  | 1880        | 23.72               | 24                  | 1.067          | 0.046            | 0.154                             | 0.164                             | 0                  |
| 12       | 1xRTT/EVDO | CDMA2000 BC1  | RETAP 4096 | Right Cheek   | 600  | 1880        | 23.64               | 24                  | 1.086          | 0.13             | 0.518                             | 0.563                             | 0                  |
| 13       | 1xRTT/EVDO | CDMA2000 BC10 | RC3 SO55   | Right Cheek   | 580  | 820.5       | 24.83               | 25                  | 1.040          | -0.06            | 0.821                             | 0.854                             | 0                  |
| 14       | 1xRTT/EVDO | CDMA2000 BC10 | RC3 SO55   | Right Tilted  | 580  | 820.5       | 24.83               | 25                  | 1.040          | -0.04            | 0.549                             | 0.571                             | 0                  |
| 15       | 1xRTT/EVDO | CDMA2000 BC10 | RC3 SO55   | Left Cheek    | 580  | 820.5       | 24.83               | 25                  | 1.040          | 0.14             | 0.761                             | 0.791                             | 0                  |
| 16       | 1xRTT/EVDO | CDMA2000 BC10 | RC3 SO55   | Left Tilted   | 580  | 820.5       | 24.83               | 25                  | 1.040          | -0.0046          | 0.521                             | 0.542                             | 0                  |
| 17       | 1xRTT/EVDO | CDMA2000 BC10 | RC3 SO55   | Right Cheek   | 476  | 817.9       | 24.74               | 25                  | 1.062          | -0.15            | 0.800                             | 0.849                             | 0                  |
| 18       | 1xRTT/EVDO | CDMA2000 BC10 | RC3 SO55   | Right Cheek   | 684  | 823.1       | 24.78               | 25                  | 1.052          | -0.14            | 0.761                             | 0.801                             | 0                  |
| 19       | 1xRTT/EVDO | CDMA2000 BC10 | RETAP 4096 | Right Cheek   | 580  | 820.5       | 24.79               | 25                  | 1.050          | -0.19            | 0.742                             | 0.779                             | 0                  |

**<LTE SAR>**

| Plot No. | Antenna | Band        | BW (MHz) | Mode               | Test Position | Ch.   | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) | Reduced Power (dB) |
|----------|---------|-------------|----------|--------------------|---------------|-------|-------------|---------------------|---------------------|----------------|------------------|-----------------------------------|-----------------------------------|--------------------|
| 20       | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Right Cheek   | 26365 | 1882.5      | 24.27               | 24.5                | 1.054          | -0.0049          | 0.809                             | 0.853                             | 0                  |
| 21       | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Right Tilted  | 26365 | 1882.5      | 24.27               | 24.5                | 1.054          | -0.02            | 0.510                             | 0.538                             | 0                  |
| 22       | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Left Cheek    | 26365 | 1882.5      | 24.27               | 24.5                | 1.054          | 0.05             | 0.519                             | 0.547                             | 0                  |
| 23       | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Left Tilted   | 26365 | 1882.5      | 24.27               | 24.5                | 1.054          | 0.11             | 0.572                             | 0.603                             | 0                  |
| 24       | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Right Cheek   | 26090 | 1855        | 24.23               | 24.5                | 1.064          | -0.02            | 0.713                             | 0.759                             | 0                  |
| 25       | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Right Cheek   | 26640 | 1910        | 24.15               | 24.5                | 1.084          | 0.0098           | 0.665                             | 0.721                             | 0                  |
| 26       | LTE     | LTE Band 25 | 10M      | QPSK 25RB 24offset | Right Cheek   | 26365 | 1882.5      | 23.15               | 23.5                | 1.084          | 0.06             | 0.635                             | 0.688                             | 0                  |
| 27       | LTE     | LTE Band 25 | 10M      | QPSK 25RB 24offset | Right Tilted  | 26365 | 1882.5      | 23.15               | 23.5                | 1.084          | 0.04             | 0.383                             | 0.415                             | 0                  |
| 28       | LTE     | LTE Band 25 | 10M      | QPSK 25RB 24offset | Left Cheek    | 26365 | 1882.5      | 23.15               | 23.5                | 1.084          | -0.02            | 0.396                             | 0.429                             | 0                  |
| 29       | LTE     | LTE Band 25 | 10M      | QPSK 25RB 24offset | Left Tilted   | 26365 | 1882.5      | 23.15               | 23.5                | 1.084          | 0.0079           | 0.417                             | 0.452                             | 0                  |
| 30       | LTE     | LTE Band 25 | 10M      | QPSK 50RB 0offset  | Right Cheek   | 26365 | 1882.5      | 22.95               | 23.5                | 1.135          | 0.04             | 0.603                             | 0.684                             | 0                  |
| 31       | LTE     | LTE Band 25 | 10M      | QPSK 50RB 0offset  | Right Tilted  | 26365 | 1882.5      | 22.95               | 23.5                | 1.135          | -0.04            | 0.364                             | 0.413                             | 0                  |
| 32       | LTE     | LTE Band 25 | 10M      | QPSK 50RB 0offset  | Left Cheek    | 26365 | 1882.5      | 22.95               | 23.5                | 1.135          | 0.07             | 0.394                             | 0.447                             | 0                  |
| 33       | LTE     | LTE Band 25 | 10M      | QPSK 50RB 0offset  | Left Tilted   | 26365 | 1882.5      | 22.95               | 23.5                | 1.135          | 0.02             | 0.400                             | 0.454                             | 0                  |

**Note:**

- Per KDB 941225 D05v02, when reported SAR of 1RB and 50%RB allocation for QPSK >0.8W/kg for any exposure position, SAR testing of 100%RB allocation for QPSK is performed at the highest power channel.
- 16QAM output power for each RB allocation configuration is > not ½ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02, 16QAM SAR testing is not required.
- Smaller bandwidth output power for each RB allocation configuration is > not ½ dB higher than the same configuration in the largest supported bandwidth.

**<WLAN2.4GHz Band SAR>**

| Plot No. | Antenna | Band             | Mode           | Test Position | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Scaling Factor | Duty Cycle % | Duty Cycle Compensate Factor | Power Drift (dB) | Measured SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) | Reduced Power (dB) |
|----------|---------|------------------|----------------|---------------|-----|-------------|---------------------|---------------------|----------------|--------------|------------------------------|------------------|-----------------------------------|-----------------------------------|--------------------|
| 34       | WLAN/BT | WLAN 2.4GHz Band | 802.11b, 1Mbps | Right Cheek   | 11  | 2462        | 14.38               | 14.5                | 1.028          | 97.67        | 1.024                        | 0.09             | 0.014                             | 0.014                             | 0                  |
| 35       | WLAN/BT | WLAN 2.4GHz Band | 802.11b, 1Mbps | Right Tilted  | 11  | 2462        | 14.38               | 14.5                | 1.028          | 97.67        | 1.024                        | -0.03            | 0.021                             | 0.023                             | 0                  |
| 36       | WLAN/BT | WLAN 2.4GHz Band | 802.11b, 1Mbps | Left Cheek    | 11  | 2462        | 14.38               | 14.5                | 1.028          | 97.67        | 1.024                        | 0.07             | 0.018                             | 0.019                             | 0                  |
| 37       | WLAN/BT | WLAN 2.4GHz Band | 802.11b, 1Mbps | Left Tilted   | 11  | 2462        | 14.38               | 14.5                | 1.028          | 97.67        | 1.024                        | 0.05             | 0.016                             | 0.016                             | 0                  |

**<WLAN5GHz Band SAR>**

| Plot No. | Antenna | Band           | Mode           | Test Position | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Scaling Factor | Duty Cycle % | Duty Cycle Compensate Factor | Power Drift (dB) | Measured SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) | Reduced Power (dB) |
|----------|---------|----------------|----------------|---------------|-----|-------------|---------------------|---------------------|----------------|--------------|------------------------------|------------------|-----------------------------------|-----------------------------------|--------------------|
| 38       | WLAN/BT | WLAN 5GHz Band | 802.11a, 6Mbps | Right Cheek   | 36  | 5180        | 12.70               | 13                  | 1.072          | 86.88        | 1.151                        | 0.06             | 0.136                             | 0.168                             | 0                  |
| 39       | WLAN/BT | WLAN 5GHz Band | 802.11a, 6Mbps | Right Tilted  | 36  | 5180        | 12.70               | 13                  | 1.072          | 86.88        | 1.151                        | 0.02             | 0.084                             | 0.104                             | 0                  |
| 40       | WLAN/BT | WLAN 5GHz Band | 802.11a, 6Mbps | Left Cheek    | 36  | 5180        | 12.70               | 13                  | 1.072          | 86.88        | 1.151                        | 0.01             | 0.266                             | 0.328                             | 0                  |
| 41       | WLAN/BT | WLAN 5GHz Band | 802.11a, 6Mbps | Left Tilted   | 36  | 5180        | 12.70               | 13                  | 1.072          | 86.88        | 1.151                        | 0.05             | 0.113                             | 0.139                             | 0                  |
| 42       | WLAN/BT | WLAN 5GHz Band | 802.11a, 6Mbps | Right Cheek   | 153 | 5765        | 11.29               | 11.5                | 1.050          | 86.88        | 1.151                        | 0.01             | 0.056                             | 0.067                             | 0                  |
| 43       | WLAN/BT | WLAN 5GHz Band | 802.11a, 6Mbps | Right Tilted  | 153 | 5765        | 11.29               | 11.5                | 1.050          | 86.88        | 1.151                        | 0.09             | 0.039                             | 0.047                             | 0                  |
| 44       | WLAN/BT | WLAN 5GHz Band | 802.11a, 6Mbps | Left Cheek    | 153 | 5765        | 11.29               | 11.5                | 1.050          | 86.88        | 1.151                        | 0.01             | 0.123                             | 0.149                             | 0                  |
| 45       | WLAN/BT | WLAN 5GHz Band | 802.11a, 6Mbps | Left Tilted   | 153 | 5765        | 11.29               | 11.5                | 1.050          | 86.88        | 1.151                        | 0.03             | 0.042                             | 0.050                             | 0                  |

## 12.2 Test Records for Hotspot SAR Test

### <CDMA SAR>

| Plot No. | Antenna    | Band          | Mode       | Test Position | Gap (cm) | Ch.  | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) | Reduced Power (dB) |
|----------|------------|---------------|------------|---------------|----------|------|-------------|---------------------|---------------------|----------------|------------------|-----------------------------------|-----------------------------------|--------------------|
| 46       | 1xRTT/EVDO | CDMA2000 BC0  | RTAP 153.6 | Front         | 1        | 384  | 836.52      | 24.83               | 25                  | 1.040          | -0.01            | 0.803                             | 0.835                             | 0                  |
| 47       | 1xRTT/EVDO | CDMA2000 BC0  | RTAP 153.6 | Back          | 1        | 384  | 836.52      | 24.83               | 25                  | 1.040          | 0.12             | 0.668                             | 0.695                             | 0                  |
| 48       | 1xRTT/EVDO | CDMA2000 BC0  | RTAP 153.6 | Left Side     | 1        | 384  | 836.52      | 24.83               | 25                  | 1.040          | 0.03             | 0.737                             | 0.766                             | 0                  |
| 49       | 1xRTT/EVDO | CDMA2000 BC0  | RTAP 153.6 | Right Side    | 1        | 384  | 836.52      | 24.83               | 25                  | 1.040          | 0.06             | 0.802                             | 0.834                             | 0                  |
| 50       | 1xRTT/EVDO | CDMA2000 BC0  | RTAP 153.6 | Bottom Side   | 1        | 384  | 836.52      | 24.83               | 25                  | 1.040          | 0.020            | 0.127                             | 0.132                             | 0                  |
| 51       | 1xRTT/EVDO | CDMA2000 BC0  | RTAP 153.6 | Front         | 1        | 1013 | 824.7       | 24.68               | 25                  | 1.076          | -0.03            | 0.904                             | 0.973                             | 0                  |
| 52       | 1xRTT/EVDO | CDMA2000 BC0  | RTAP 153.6 | Front         | 1        | 777  | 848.31      | 24.81               | 25                  | 1.045          | 0.03             | 0.827                             | 0.864                             | 0                  |
| 55       | 1xRTT/EVDO | CDMA2000 BC0  | RTAP 153.6 | Right Side    | 1        | 1013 | 824.7       | 24.68               | 25                  | 1.076          | 0.14             | 0.941                             | 1.013                             | 0                  |
| 56       | 1xRTT/EVDO | CDMA2000 BC0  | RTAP 153.6 | Right Side    | 1        | 777  | 848.31      | 24.81               | 25                  | 1.045          | 0.01             | 0.540                             | 0.564                             | 0                  |
| 64       | 1xRTT/EVDO | CDMA2000 BC1  | RTAP 153.6 | Front         | 1        | 600  | 1880        | 23.68               | 24                  | 1.076          | 0.13             | 0.731                             | 0.787                             | 0                  |
| 65       | 1xRTT/EVDO | CDMA2000 BC1  | RTAP 153.6 | Back          | 1        | 600  | 1880        | 23.68               | 24                  | 1.076          | 0.0043           | 1.160                             | 1.249                             | 0                  |
| 66       | 1xRTT/EVDO | CDMA2000 BC1  | RTAP 153.6 | Left Side     | 1        | 600  | 1880        | 23.68               | 24                  | 1.076          | 0.08             | 0.333                             | 0.358                             | 0                  |
| 67       | 1xRTT/EVDO | CDMA2000 BC1  | RTAP 153.6 | Right Side    | 1        | 600  | 1880        | 23.68               | 24                  | 1.076          | 0.18             | 0.156                             | 0.168                             | 0                  |
| 68       | 1xRTT/EVDO | CDMA2000 BC1  | RTAP 153.6 | Bottom Side   | 1        | 600  | 1880        | 23.68               | 24                  | 1.076          | 0.12             | 1.190                             | 1.281                             | 0                  |
| 69       | 1xRTT/EVDO | CDMA2000 BC1  | RTAP 153.6 | Back          | 1        | 25   | 1851.3      | 23.58               | 24                  | 1.102          | -0.03            | 1.050                             | 1.157                             | 0                  |
| 70       | 1xRTT/EVDO | CDMA2000 BC1  | RTAP 153.6 | Back          | 1        | 1175 | 1908.8      | 23.5                | 24                  | 1.122          | 0.03             | 1.270                             | 1.425                             | 0                  |
| 72       | 1xRTT/EVDO | CDMA2000 BC1  | RTAP 153.6 | Bottom Side   | 1        | 25   | 1851.3      | 23.58               | 24                  | 1.102          | 0.13             | 1.100                             | 1.212                             | 0                  |
| 73       | 1xRTT/EVDO | CDMA2000 BC1  | RTAP 153.6 | Bottom Side   | 1        | 1175 | 1908.8      | 23.5                | 24                  | 1.122          | 0.15             | 1.260                             | 1.414                             | 0                  |
| 84       | 1xRTT/EVDO | CDMA2000 BC10 | RTAP 153.6 | Front         | 1        | 580  | 820.5       | 24.84               | 25                  | 1.038          | -0.04            | 0.898                             | 0.932                             | 0                  |
| 85       | 1xRTT/EVDO | CDMA2000 BC10 | RTAP 153.6 | Back          | 1        | 580  | 820.5       | 24.84               | 25                  | 1.038          | 0.08             | 0.865                             | 0.897                             | 0                  |
| 86       | 1xRTT/EVDO | CDMA2000 BC10 | RTAP 153.6 | Left Side     | 1        | 580  | 820.5       | 24.84               | 25                  | 1.038          | 0.10             | 0.947                             | 0.983                             | 0                  |
| 87       | 1xRTT/EVDO | CDMA2000 BC10 | RTAP 153.6 | Right Side    | 1        | 580  | 820.5       | 24.84               | 25                  | 1.038          | 0.07             | 0.983                             | 1.020                             | 0                  |
| 89       | 1xRTT/EVDO | CDMA2000 BC10 | RTAP 153.6 | Bottom Side   | 1        | 580  | 820.5       | 24.84               | 25                  | 1.038          | 0.03             | 0.113                             | 0.117                             | 0                  |
| 90       | 1xRTT/EVDO | CDMA2000 BC10 | RTAP 153.6 | Front         | 1        | 476  | 817.9       | 24.73               | 25                  | 1.064          | -0.04            | 0.945                             | 1.006                             | 0                  |
| 91       | 1xRTT/EVDO | CDMA2000 BC10 | RTAP 153.6 | Front         | 1        | 684  | 823.1       | 24.78               | 25                  | 1.052          | -0.01            | 0.923                             | 0.971                             | 0                  |
| 92       | 1xRTT/EVDO | CDMA2000 BC10 | RTAP 153.6 | Back          | 1        | 476  | 817.9       | 24.73               | 25                  | 1.064          | 0.07             | 0.859                             | 0.914                             | 0                  |
| 93       | 1xRTT/EVDO | CDMA2000 BC10 | RTAP 153.6 | Back          | 1        | 684  | 823.1       | 24.78               | 25                  | 1.052          | 0.03             | 0.853                             | 0.897                             | 0                  |
| 94       | 1xRTT/EVDO | CDMA2000 BC10 | RTAP 153.6 | Left Side     | 1        | 476  | 817.9       | 24.73               | 25                  | 1.064          | -0.04            | 0.902                             | 0.960                             | 0                  |
| 95       | 1xRTT/EVDO | CDMA2000 BC10 | RTAP 153.6 | Left Side     | 1        | 684  | 823.1       | 24.78               | 25                  | 1.052          | -0.02            | 0.915                             | 0.963                             | 0                  |
| 96       | 1xRTT/EVDO | CDMA2000 BC10 | RTAP 153.6 | Right Side    | 1        | 476  | 817.9       | 24.73               | 25                  | 1.064          | -0.05            | 0.923                             | 0.982                             | 0                  |
| 97       | 1xRTT/EVDO | CDMA2000 BC10 | RTAP 153.6 | Right Side    | 1        | 684  | 823.1       | 24.78               | 25                  | 1.052          | 0.15             | 0.895                             | 0.942                             | 0                  |

**<LTE SAR>**

| Plot No. | Antenna | Band        | BW (MHz) | Mode               | Test Position | Gap (cm) | Ch.   | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) | Reduced Power (dB) |
|----------|---------|-------------|----------|--------------------|---------------|----------|-------|-------------|---------------------|---------------------|----------------|------------------|-----------------------------------|-----------------------------------|--------------------|
| 107      | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Front         | 1        | 26365 | 1882.5      | 24.27               | 24.5                | 1.054          | 0.08             | 0.401                             | 0.423                             | 0                  |
| 108      | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Back          | 1        | 26365 | 1882.5      | 24.27               | 24.5                | 1.054          | 0.13             | 1.010                             | 1.065                             | 0                  |
| 109      | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Left Side     | 1        | 26365 | 1882.5      | 24.27               | 24.5                | 1.054          | 0.07             | 0.849                             | 0.895                             | 0                  |
| 110      | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Top Side      | 1        | 26365 | 1882.5      | 24.27               | 24.5                | 1.054          | -0.009           | 0.216                             | 0.228                             | 0                  |
| 111      | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Back          | 1        | 26090 | 1855        | 24.23               | 24.5                | 1.064          | 0.18             | 0.921                             | 0.980                             | 0                  |
| 112      | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Back          | 1        | 26640 | 1910        | 24.15               | 24.5                | 1.084          | 0.00045          | 0.958                             | 1.038                             | 0                  |
| 113      | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Left Side     | 1        | 26090 | 1855        | 24.23               | 24.5                | 1.064          | 0.18             | 0.726                             | 0.773                             | 0                  |
| 114      | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Left Side     | 1        | 26640 | 1910        | 24.15               | 24.5                | 1.084          | -0.18            | 0.653                             | 0.708                             | 0                  |
| 118      | LTE     | LTE Band 25 | 10M      | QPSK 25RB 24offset | Front         | 1        | 26365 | 1882.5      | 23.15               | 23.5                | 1.084          | 0.034            | 0.298                             | 0.323                             | 0                  |
| 119      | LTE     | LTE Band 25 | 10M      | QPSK 25RB 24offset | Back          | 1        | 26365 | 1882.5      | 23.15               | 23.5                | 1.084          | 0.09             | 0.970                             | 1.051                             | 0                  |
| 120      | LTE     | LTE Band 25 | 10M      | QPSK 25RB 24offset | Left Side     | 1        | 26365 | 1882.5      | 23.15               | 23.5                | 1.084          | -0.0093          | 0.625                             | 0.677                             | 0                  |
| 121      | LTE     | LTE Band 25 | 10M      | QPSK 25RB 24offset | Top Side      | 1        | 26365 | 1882.5      | 23.15               | 23.5                | 1.084          | -0.0049          | 0.170                             | 0.184                             | 0                  |
| 122      | LTE     | LTE Band 25 | 10M      | QPSK 25RB 24offset | Back          | 1        | 26090 | 1855        | 23.05               | 23.5                | 1.109          | 0.09             | 0.703                             | 0.780                             | 0                  |
| 123      | LTE     | LTE Band 25 | 10M      | QPSK 25RB 24offset | Back          | 1        | 26640 | 1910        | 23.12               | 23.5                | 1.091          | 0.10             | 0.871                             | 0.951                             | 0                  |
| 124      | LTE     | LTE Band 25 | 10M      | QPSK 50RB 0offset  | Front         | 1        | 26365 | 1882.5      | 22.95               | 23.5                | 1.135          | 0.07             | 0.282                             | 0.320                             | 0                  |
| 125      | LTE     | LTE Band 25 | 10M      | QPSK 50RB 0offset  | Back          | 1        | 26365 | 1882.5      | 22.95               | 23.5                | 1.135          | -0.01            | 0.925                             | 1.050                             | 0                  |
| 126      | LTE     | LTE Band 25 | 10M      | QPSK 50RB 0offset  | Left Side     | 1        | 26365 | 1882.5      | 22.95               | 23.5                | 1.135          | 0.03             | 0.604                             | 0.686                             | 0                  |
| 127      | LTE     | LTE Band 25 | 10M      | QPSK 50RB 0offset  | Top Side      | 1        | 26365 | 1882.5      | 22.95               | 23.5                | 1.135          | -0.02            | 0.164                             | 0.186                             | 0                  |

**Note:**

- Per KDB 941225 D05v02, when reported SAR of 1RB and 50%RB allocation for QPSK >0.8W/kg for any exposure position, SAR testing of 100%RB allocation for QPSK is performed at the highest power channel.
- 16QAM output power for each RB allocation configuration is > not ½ dB higher than the same configuration in QPSK and the *reported* SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02, 16QAM SAR testing is not required.
- Smaller bandwidth output power for each RB allocation configuration is > not ½ dB higher than the same configuration in the largest supported bandwidth, and the *reported* SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02, smaller bandwidth SAR testing is not required.

**<WLAN2.4GHz Band SAR>**

| Plot No. | Antenna | Band             | Mode           | Test Position | Gap (cm) | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Scaling Factor | Duty Cycle % | Duty Cycle Compensate Factor | Power Drift (dB) | Measured SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) | Reduced Power (dB) |
|----------|---------|------------------|----------------|---------------|----------|-----|-------------|---------------------|---------------------|----------------|--------------|------------------------------|------------------|-----------------------------------|-----------------------------------|--------------------|
| 128      | WLAN/BT | WLAN 2.4GHz Band | 802.11b, 1Mbps | Front         | 1        | 11  | 2462        | 14.38               | 14.5                | 1.028          | 97.67        | 1.024                        | 0.01             | 0.00303                           | 0.003                             | 0                  |
| 129      | WLAN/BT | WLAN 2.4GHz Band | 802.11b, 1Mbps | Back          | 1        | 11  | 2462        | 14.38               | 14.5                | 1.028          | 97.67        | 1.024                        | 0.01             | 0.021                             | 0.023                             | 0                  |
| 130      | WLAN/BT | WLAN 2.4GHz Band | 802.11b, 1Mbps | Right Side    | 1        | 11  | 2462        | 14.38               | 14.5                | 1.028          | 97.67        | 1.024                        | 0.15             | 0.011                             | 0.011                             | 0                  |



### 12.3 Test Records for Body Worn SAR Test

**Note:**

1. For Body-worn SAR testing: "V" in the Headset column means the Headset is plugged during SAR testing.
2. Body-worn SAR testing was performed at 10mm separation, and this distance is determined by the handset manufacturer that there will be body-worn accessories that users may acquire at the time of equipment certification, to enable users to purchase aftermarket body-worn accessories with the required minimum separation.
3. Per KDB 941225 D06, when the same wireless modes and device transmission configurations are required for testing body-worn accessories and hotspot mode, it is not necessary to test body-worn accessory SAR for the same device orientation if the test separation distance for hotspot mode is more conservative than that used for body-worn accessories.
4. Body-worn exposure conditions are intended to voice call operations, therefore CDMA voice call is selected to be tested.
5. Though per KDB 648474 D04v01, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2$  W/kg, the SAR testing with a headset connected to the handset is not required, but considered the simultaneous SAR for body-worn, we still perform the LTE SAR and WLAN SAR with headset mode.

#### <CDMA SAR>

| Plot No. | Antenna    | Band          | Mode       | Test Position | Gap (cm) | Headset | Ch.  | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) | Reduced Power (dB) |
|----------|------------|---------------|------------|---------------|----------|---------|------|-------------|---------------------|---------------------|----------------|------------------|-----------------------------------|-----------------------------------|--------------------|
| 57       | 1xRTT/EVDO | CDMA2000 BC0  | RC3 SO32   | Front         | 1        | -       | 384  | 836.52      | 24.84               | 25                  | 1.038          | -0.06            | 0.823                             | 0.854                             | 0                  |
| 58       | 1xRTT/EVDO | CDMA2000 BC0  | RC3 SO32   | Back          | 1        | -       | 384  | 836.52      | 24.84               | 25                  | 1.038          | 0.09             | 0.655                             | 0.680                             | 0                  |
| 138      | 1xRTT/EVDO | CDMA2000 BC0  | RC3 SO32   | Back          | 1        | -       | 384  | 836.52      | 16.91               | 17                  | 1.021          | 0.03             | 0.114                             | 0.116                             | 8                  |
| 59       | 1xRTT/EVDO | CDMA2000 BC0  | RC3 SO32   | Front         | 1        | -       | 1013 | 824.7       | 24.68               | 25                  | 1.076          | 0.01             | 0.919                             | 0.989                             | 0                  |
| 60       | 1xRTT/EVDO | CDMA2000 BC0  | RC3 SO32   | Front         | 1        | -       | 777  | 848.31      | 24.83               | 25                  | 1.040          | 0.03             | 0.791                             | 0.823                             | 0                  |
| 61       | 1xRTT/EVDO | CDMA2000 BC0  | RETAP 4096 | Front         | 1        | -       | 1013 | 824.7       | 24.71               | 25                  | 1.069          | -0.11            | 0.879                             | 0.940                             | 0                  |
| 62       | 1xRTT/EVDO | CDMA2000 BC0  | RETAP 4096 | Front         | 1        | -       | 384  | 836.52      | 24.82               | 25                  | 1.042          | 0.02             | 0.701                             | 0.731                             | 0                  |
| 63       | 1xRTT/EVDO | CDMA2000 BC0  | RETAP 4096 | Front         | 1        | -       | 777  | 848.31      | 24.80               | 25                  | 1.047          | 0.030            | 0.712                             | 0.746                             | 0                  |
| 74       | 1xRTT/EVDO | CDMA2000 BC1  | RC3 SO32   | Front         | 1        | -       | 600  | 1880        | 23.76               | 24                  | 1.057          | 0.05             | 0.688                             | 0.727                             | 0                  |
| 75       | 1xRTT/EVDO | CDMA2000 BC1  | RC3 SO32   | Back          | 1        | -       | 600  | 1880        | 23.76               | 24                  | 1.057          | 0.04             | 1.110                             | 1.173                             | 0                  |
| 76       | 1xRTT/EVDO | CDMA2000 BC1  | RC3 SO32   | Back          | 1        | -       | 25   | 1851.3      | 23.68               | 24                  | 1.076          | -0.05            | 1.030                             | 1.109                             | 0                  |
| 77       | 1xRTT/EVDO | CDMA2000 BC1  | RC3 SO32   | Back          | 1        | -       | 1175 | 1908.8      | 23.48               | 24                  | 1.127          | 0.06             | 1.230                             | 1.386                             | 0                  |
| 78       | 1xRTT/EVDO | CDMA2000 BC1  | RETAP 4096 | Back          | 1        | -       | 1175 | 1908.8      | 23.43               | 24                  | 1.140          | -0.009           | 1.250                             | 1.425                             | 0                  |
| 79       | 1xRTT/EVDO | CDMA2000 BC1  | RETAP 4096 | Back          | 1        | -       | 25   | 1851.3      | 23.55               | 24                  | 1.109          | -0.03            | 1.090                             | 1.209                             | 0                  |
| 80       | 1xRTT/EVDO | CDMA2000 BC1  | RETAP 4096 | Back          | 1        | -       | 600  | 1880        | 23.64               | 24                  | 1.086          | -0.03            | 1.160                             | 1.260                             | 0                  |
| 81       | 1xRTT/EVDO | CDMA2000 BC1  | RETAP 4096 | Back          | 1        | v       | 1175 | 1908.8      | 23.43               | 24                  | 1.140          | -0.07            | 1.260                             | 1.437                             | 0                  |
| 82       | 1xRTT/EVDO | CDMA2000 BC1  | RETAP 4096 | Back          | 1        | v       | 25   | 1851.3      | 23.55               | 24                  | 1.109          | -0.05            | 1.030                             | 1.142                             | 0                  |
| 83       | 1xRTT/EVDO | CDMA2000 BC1  | RETAP 4096 | Back          | 1        | v       | 600  | 1880        | 23.64               | 24                  | 1.086          | 0.0096           | 1.130                             | 1.228                             | 0                  |
| 98       | 1xRTT/EVDO | CDMA2000 BC10 | RC3 SO32   | Front         | 1        | -       | 580  | 820.5       | 24.82               | 25                  | 1.042          | 0.10             | 0.947                             | 0.987                             | 0                  |
| 99       | 1xRTT/EVDO | CDMA2000 BC10 | RC3 SO32   | Back          | 1        | -       | 580  | 820.5       | 24.82               | 25                  | 1.042          | -0.09            | 0.899                             | 0.937                             | 0                  |
| 139      | 1xRTT/EVDO | CDMA2000 BC10 | RC3 SO32   | Back          | 1        | -       | 580  | 820.5       | 16.93               | 17                  | 1.016          | 0.06             | 0.149                             | 0.151                             | 8                  |
| 100      | 1xRTT/EVDO | CDMA2000 BC10 | RC3 SO32   | Front         | 1        | -       | 476  | 817.9       | 24.73               | 25                  | 1.064          | -0.02            | 0.937                             | 0.997                             | 0                  |
| 101      | 1xRTT/EVDO | CDMA2000 BC10 | RC3 SO32   | Front         | 1        | -       | 684  | 823.1       | 24.74               | 25                  | 1.062          | 0.06             | 0.931                             | 0.988                             | 0                  |
| 102      | 1xRTT/EVDO | CDMA2000 BC10 | RC3 SO32   | Back          | 1        | -       | 476  | 817.9       | 24.73               | 25                  | 1.064          | 0.09             | 0.853                             | 0.908                             | 0                  |
| 103      | 1xRTT/EVDO | CDMA2000 BC10 | RC3 SO32   | Back          | 1        | -       | 684  | 823.1       | 24.74               | 25                  | 1.062          | -0.09            | 0.835                             | 0.887                             | 0                  |
| 104      | 1xRTT/EVDO | CDMA2000 BC10 | RETAP 4096 | Front         | 1        | -       | 476  | 817.9       | 24.71               | 25                  | 1.069          | -0.0082          | 0.853                             | 0.912                             | 0                  |
| 105      | 1xRTT/EVDO | CDMA2000 BC10 | RETAP 4096 | Front         | 1        | -       | 580  | 820.5       | 24.79               | 25                  | 1.050          | -0.04            | 0.886                             | 0.930                             | 0                  |
| 106      | 1xRTT/EVDO | CDMA2000 BC10 | RETAP 4096 | Front         | 1        | -       | 684  | 823.1       | 24.71               | 25                  | 1.069          | -0.0027          | 0.871                             | 0.931                             | 0                  |

**<LTE SAR>**

| Plot No. | Antenna | Band        | BW (MHz) | Mode               | Test Position | Gap (cm) | Headset | Ch.   | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) | Reduced Power (dB) |
|----------|---------|-------------|----------|--------------------|---------------|----------|---------|-------|-------------|---------------------|---------------------|----------------|------------------|-----------------------------------|-----------------------------------|--------------------|
| 107      | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Front         | 1        | -       | 26365 | 1882.5      | 24.27               | 24.5                | 1.054          | 0.08             | 0.401                             | 0.423                             | 0                  |
| 108      | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Back          | 1        | -       | 26365 | 1882.5      | 24.27               | 24.5                | 1.054          | 0.13             | 1.010                             | 1.065                             | 0                  |
| 140      | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Back          | 1        | -       | 26365 | 1882.5      | 17.69               | 18                  | 1.074          | -0.16            | 0.252                             | 0.271                             | 6.5                |
| 111      | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Back          | 1        | -       | 26090 | 1855        | 24.23               | 24.5                | 1.064          | 0.18             | 0.921                             | 0.980                             | 0                  |
| 112      | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Back          | 1        | -       | 26640 | 1910        | 24.15               | 24.5                | 1.084          | 0.00045          | 0.958                             | 1.038                             | 0                  |
| 115      | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Back          | 1        | v       | 26365 | 1882.5      | 24.27               | 24.5                | 1.054          | -0.14            | 0.853                             | 0.899                             | 0                  |
| 116      | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Back          | 1        | v       | 26090 | 1855        | 24.23               | 24.5                | 1.064          | -0.023           | 0.706                             | 0.751                             | 0                  |
| 117      | LTE     | LTE Band 25 | 10M      | QPSK 1RB 49offset  | Back          | 1        | v       | 26640 | 1882.5      | 24.15               | 24.5                | 1.084          | -0.025           | 0.918                             | 0.995                             | 0                  |
| 118      | LTE     | LTE Band 25 | 10M      | QPSK 25RB 24offset | Front         | 1        | -       | 26365 | 1882.5      | 23.15               | 23.5                | 1.084          | 0.034            | 0.298                             | 0.323                             | 0                  |
| 119      | LTE     | LTE Band 25 | 10M      | QPSK 25RB 24offset | Back          | 1        | -       | 26365 | 1882.5      | 23.15               | 23.5                | 1.084          | 0.09             | 0.970                             | 1.051                             | 0                  |
| 122      | LTE     | LTE Band 25 | 10M      | QPSK 25RB 24offset | Back          | 1        | -       | 26090 | 1855        | 23.05               | 23.5                | 1.109          | 0.09             | 0.703                             | 0.780                             | 0                  |
| 123      | LTE     | LTE Band 25 | 10M      | QPSK 25RB 24offset | Back          | 1        | -       | 26640 | 1910        | 23.12               | 23.5                | 1.091          | 0.1              | 0.871                             | 0.951                             | 0                  |
| 124      | LTE     | LTE Band 25 | 10M      | QPSK 50RB 0offset  | Front         | 1        | -       | 26365 | 1882.5      | 22.95               | 23.5                | 1.135          | 0.07             | 0.282                             | 0.320                             | 0                  |
| 125      | LTE     | LTE Band 25 | 10M      | QPSK 50RB 0offset  | Back          | 1        | -       | 26365 | 1882.5      | 22.95               | 23.5                | 1.135          | -0.01            | 0.925                             | 1.050                             | 0                  |

**<WLAN2.4GHz Band SAR>**

| Plot No. | Antenna | Band             | Mode           | Test Position | Gap (cm) | Headset | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Scaling Factor | Duty Cycle % | Duty Cycle Compensate Factor | Power Drift (dB) | Measured SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) | Reduced Power (dB) |
|----------|---------|------------------|----------------|---------------|----------|---------|-----|-------------|---------------------|---------------------|----------------|--------------|------------------------------|------------------|-----------------------------------|-----------------------------------|--------------------|
| 128      | WLAN/BT | WLAN 2.4GHz Band | 802.11b, 1Mbps | Front         | 1        | -       | 11  | 2462        | 14.38               | 14.5                | 1.028          | 97.67        | 1.024                        | 0.01             | 0.003                             | 0.00303                           | 0                  |
| 129      | WLAN/BT | WLAN 2.4GHz Band | 802.11b, 1Mbps | Back          | 1        | -       | 11  | 2462        | 14.38               | 14.5                | 1.028          | 97.67        | 1.024                        | 0.01             | 0.021                             | 0.023                             | 0                  |
| 131      | WLAN/BT | WLAN 2.4GHz Band | 802.11b, 1Mbps | Back          | 1        | v       | 11  | 2462        | 14.38               | 14.5                | 1.028          | 97.67        | 1.024                        | 0.08             | 0.023                             | 0.025                             | 0                  |

**<WLAN5GHz Band SAR>**

| Plot No. | Antenna | Band           | Mode           | Test Position | Gap (cm) | Headset | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Scaling Factor | Duty Cycle % | Duty Cycle Compensate Factor | Power Drift (dB) | Measured SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) | Reduced Power (dB) |
|----------|---------|----------------|----------------|---------------|----------|---------|-----|-------------|---------------------|---------------------|----------------|--------------|------------------------------|------------------|-----------------------------------|-----------------------------------|--------------------|
| 132      | WLAN/BT | WLAN 5GHz Band | 802.11a, 6Mbps | Front         | 1        | -       | 36  | 5180        | 12.7                | 13                  | 1.072          | 86.88        | 1.151                        | 0.09             | 0.059                             | 0.073                             | 0                  |
| 133      | WLAN/BT | WLAN 5GHz Band | 802.11a, 6Mbps | Back          | 1        | -       | 36  | 5180        | 12.7                | 13                  | 1.072          | 86.88        | 1.151                        | 0.085            | 0.135                             | 0.166                             | 0                  |
| 134      | WLAN/BT | WLAN 5GHz Band | 802.11a, 6Mbps | Back          | 1        | v       | 36  | 5180        | 12.7                | 13                  | 1.072          | 86.88        | 1.151                        | 0.08             | 0.123                             | 0.152                             | 0                  |
| 135      | WLAN/BT | WLAN 5GHz Band | 802.11a, 6Mbps | Front         | 1        | -       | 153 | 5765        | 11.29               | 11.5                | 1.050          | 86.88        | 1.151                        | 0.09             | 0.027                             | 0.033                             | 0                  |
| 136      | WLAN/BT | WLAN 5GHz Band | 802.11a, 6Mbps | Back          | 1        | -       | 153 | 5765        | 11.29               | 11.5                | 1.050          | 86.88        | 1.151                        | 0.02             | 0.085                             | 0.103                             | 0                  |
| 137      | WLAN/BT | WLAN 5GHz Band | 802.11a, 6Mbps | Back          | 1        | v       | 153 | 5765        | 11.29               | 11.5                | 1.050          | 86.88        | 1.151                        | 0.18             | 0.081                             | 0.098                             | 0                  |

### 12.4 Repeated SAR Measurement

| Plot No. | Antenna    | Band          | Mode       | Test Position | Gap (cm) | Ch.  | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR <sub>10</sub> (W/kg) | Ratio | Reported SAR <sub>10</sub> (W/kg) |
|----------|------------|---------------|------------|---------------|----------|------|-------------|---------------------|---------------------|----------------|------------------|-----------------------------------|-------|-----------------------------------|
| 70       | 1xRTT/EVDO | CDMA2000 BC1  | RTAP 153.6 | Back          | 1        | 1175 | 1908.8      | 23.5                | 24                  | 1.122          | 0.03             | 1.270                             | 1     | 1.425                             |
| 71       | 1xRTT/EVDO | CDMA2000 BC1  | RTAP 153.6 | Back          | 1        | 1175 | 1908.8      | 23.5                | 24                  | 1.122          | -0.10            | 1.270                             | 1     | 1.425                             |
| 87       | 1xRTT/EVDO | CDMA2000 BC10 | RTAP 153.6 | Right Side    | 1        | 580  | 820.5       | 24.84               | 25                  | 1.038          | 0.07             | 0.983                             | 1     | 1.020                             |
| 88       | 1xRTT/EVDO | CDMA2000 BC10 | RTAP 153.6 | Right Side    | 1        | 580  | 820.5       | 24.84               | 25                  | 1.038          | 0.04             | 0.949                             | 1.036 | 0.985                             |

**Note:**

1. Per KDB 865664 D01v01, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg
2. Per KDB 865664 D01v01, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45$ W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

## 12.5 Highest SAR Plot

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2013-4-21

#55 CDMA2000 BC0\_RTAP 153.6\_Right Side 1cm\_Ch1013

**DUT: 320404**

Communication System: CDMA2000; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: MSL\_835\_130421 Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.97$  mho/m;  $\epsilon_r = 54.574$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.3 (4); SEMCAD X Version 14.4.5 (3634)

**Ch1013/Area Scan (31x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.150 mW/g


**Ch1013/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.586 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.325 W/kg

**SAR(1 g) = 0.941 mW/g; SAR(10 g) = 0.649 mW/g**

Maximum value of SAR (measured) = 1.156 mW/g

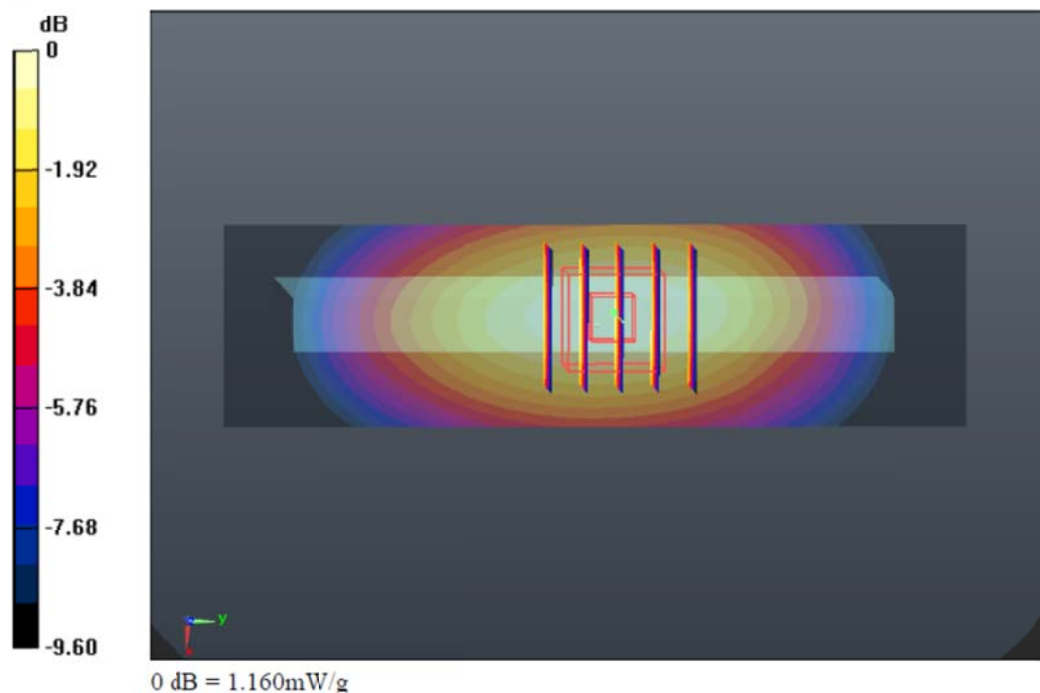

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2013-4-22

**#81 CDMA2000 BC1\_RETAP 4096\_Back 1cm\_Ch1175\_Headset**

**DUT: 320404**

Communication System: CDMA2000; Frequency: 1908.75 MHz; Duty Cycle: 1:1  
 Medium: MSL\_1900\_130422 Medium parameters used:  $f = 1909$  MHz;  $\sigma = 1.561$  mho/m;  $\epsilon_r = 53.225$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.5 °C; Liquid Temperature : 21.4 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.4.5 (3634)

**Ch1175/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 1.706 mW/g

**Ch1175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 10.690 V/m; Power Drift = -0.07 dB  
 Peak SAR (extrapolated) = 2.128 W/kg  
**SAR(1 g) = 1.260 mW/g; SAR(10 g) = 0.654 mW/g**  
 Maximum value of SAR (measured) = 1.740 mW/g

**Ch1175/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 10.690 V/m; Power Drift = -0.07 dB  
 Peak SAR (extrapolated) = 1.767 W/kg  
**SAR(1 g) = 1.020 mW/g; SAR(10 g) = 0.584 mW/g**  
 Maximum value of SAR (measured) = 1.476 mW/g

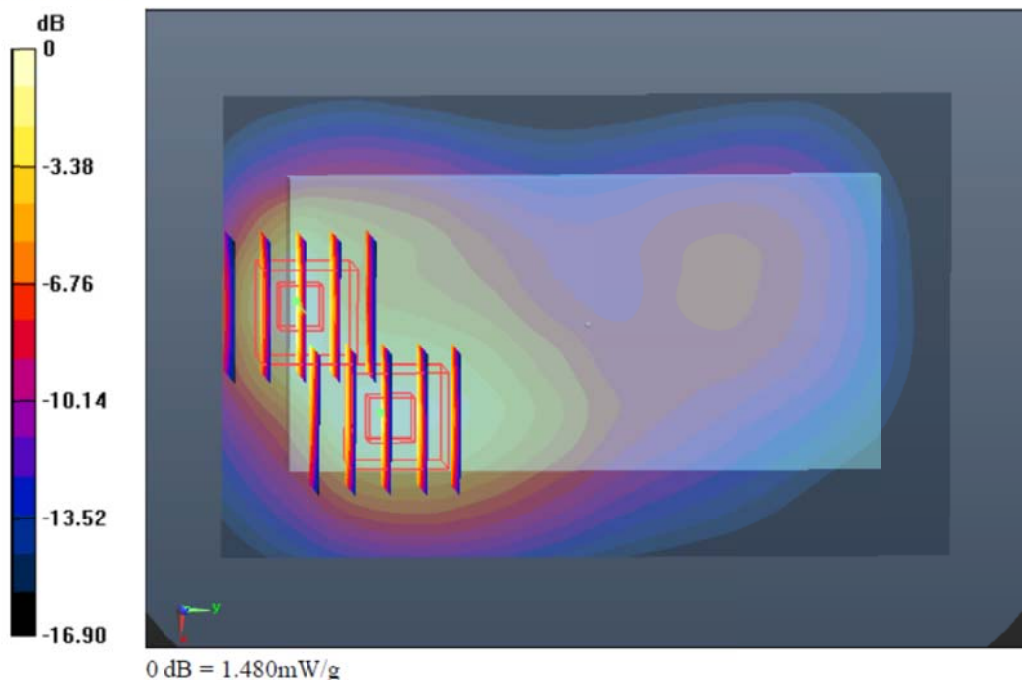



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2013-4-21

**#87 CDMA2000 BC10\_RTAP 153.6\_Right Side 1cm\_Ch580**

**DUT: 320404**


Communication System: CDMA2000; Frequency: 820.5 MHz; Duty Cycle: 1:1  
 Medium: MSL\_835\_130421 Medium parameters used:  $f = 820.5 \text{ MHz}$ ;  $\sigma = 0.966 \text{ mho/m}$ ;  $\epsilon_r = 54.617$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.4.5 (3634)

**Ch580/Area Scan (31x111x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (interpolated) = 1.163 mW/g

**Ch580/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 32.728 V/m; Power Drift = 0.07 dB  
 Peak SAR (extrapolated) = 1.372 W/kg  
**SAR(1 g) = 0.983 mW/g; SAR(10 g) = 0.680 mW/g**  
 Maximum value of SAR (measured) = 1.202 mW/g

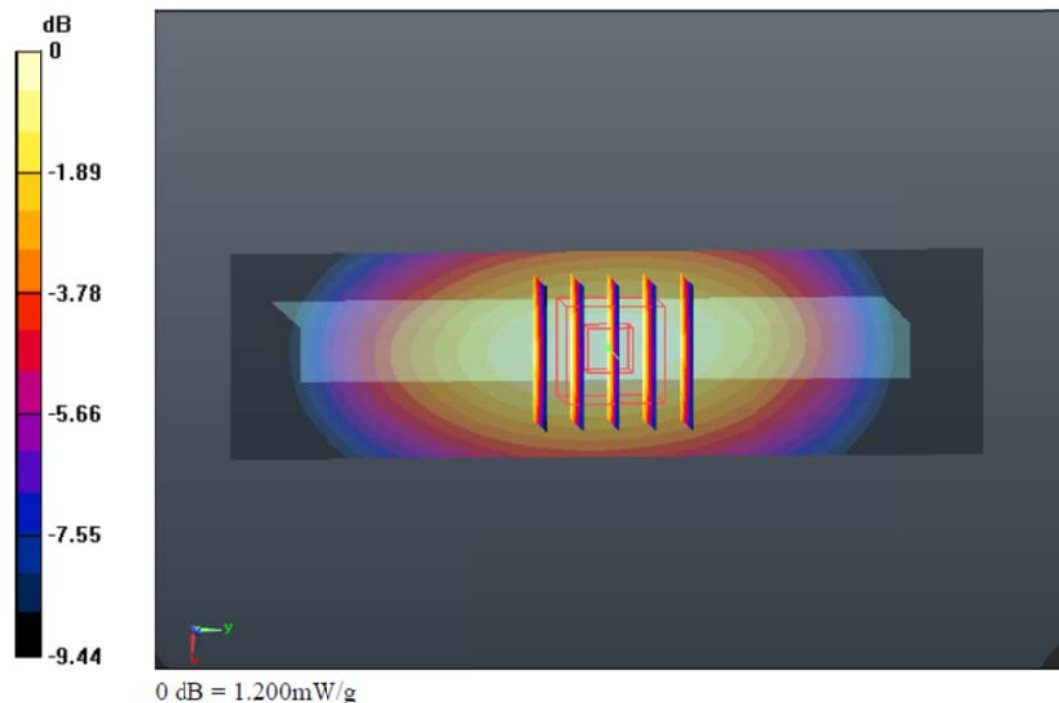

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2013-4-22

#108 LTE Band 25\_10M\_QPSK 1RB 49offset\_Back 1cm\_Ch26365

DUT: 320404

Communication System: LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_130422 Medium parameters used:  $f = 1882.5$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r =$

53.301;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.4.5 (3634)

**Ch26365/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.367 mW/g

**Ch26365/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.333 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.848 W/kg

**SAR(1 g) = 1.010 mW/g; SAR(10 g) = 0.516 mW/g**

Maximum value of SAR (measured) = 1.418 mW/g


**Ch26365/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.333 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.108 W/kg

**SAR(1 g) = 0.684 mW/g; SAR(10 g) = 0.398 mW/g**

Maximum value of SAR (measured) = 0.905 mW/g

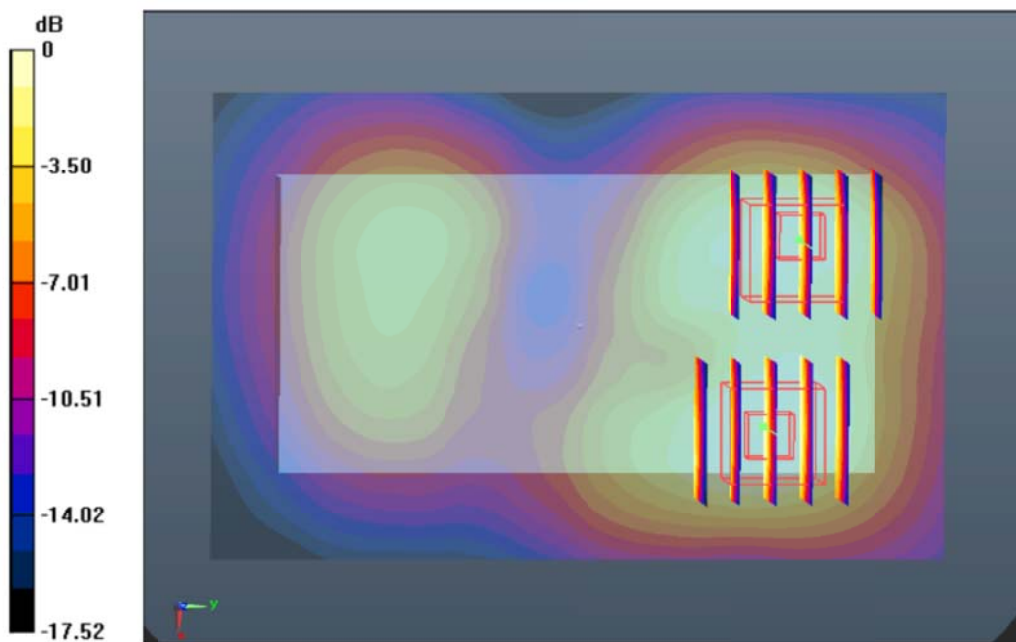

0 dB = 0.900mW/g

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2013-4-30

#131 802.11b\_1M\_Back 1cm\_Ch11\_Headset

DUT: 320404

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_130430 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.966$  mho/m;  $\epsilon_r =$

51.444;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.94, 6.94, 6.94); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.4.5 (3634)

**Ch11/Area Scan (81x131x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.037 mW/g


**Ch11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.561 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.093 W/kg

SAR(1 g) = 0.023 mW/g; SAR(10 g) = 0.010 mW/g

Maximum value of SAR (measured) = 0.036 mW/g

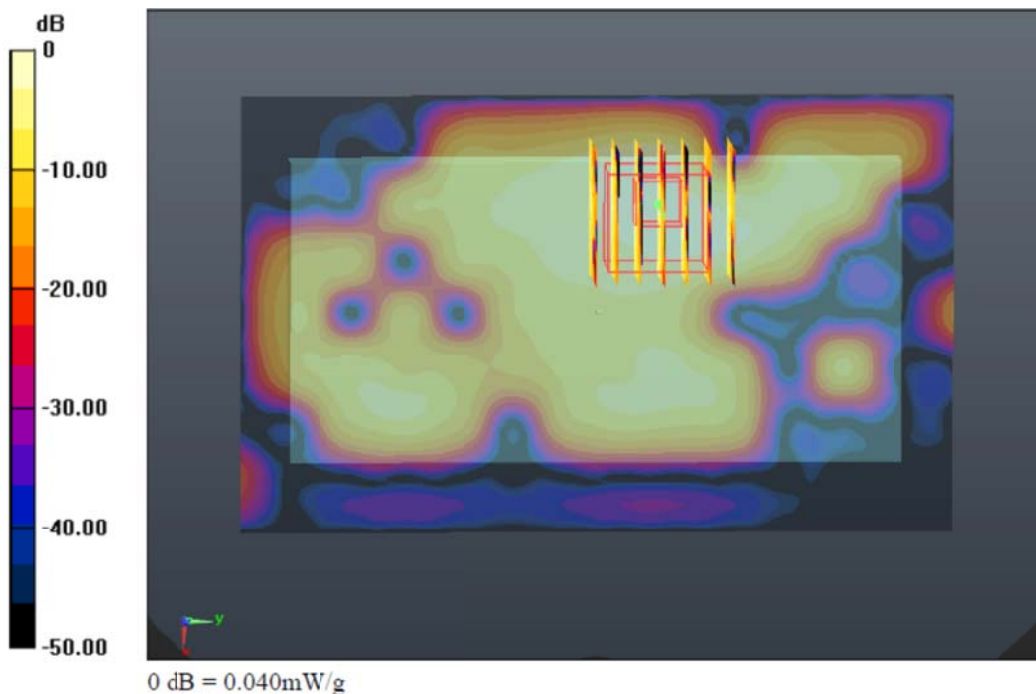



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2013-4-29

#40 802.11a\_6M\_Left Cheek\_Ch36

**DUT: 320404**

Communication System: WIFI; Frequency: 5180 MHz; Duty Cycle: 1:1.15107

Medium: HSL\_5000\_130429 Medium parameters used:  $f = 5180 \text{ MHz}$ ;  $\sigma = 4.784 \text{ mho/m}$ ;  $\epsilon_r =$

$35.526$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.3 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $21.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.11, 5.11, 5.11); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.4.5 (3634)

**Ch36/Area Scan (101x161x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (interpolated) =  $0.513 \text{ mW/g}$


**Ch36/Zoom Scan (8x8x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$

Reference Value =  $1.804 \text{ V/m}$ ; Power Drift =  $0.01 \text{ dB}$

Peak SAR (extrapolated) =  $0.906 \text{ W/kg}$

**SAR(1 g) =  $0.266 \text{ mW/g}$ ; SAR(10 g) =  $0.092 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.489 \text{ mW/g}$

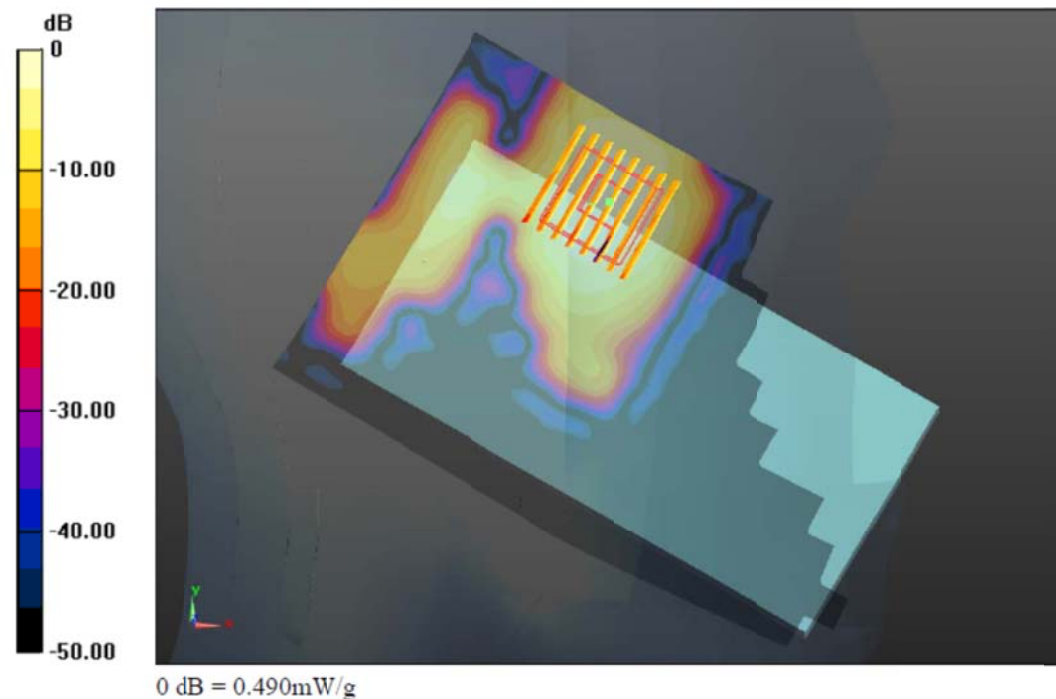

## 12.6 Simultaneous Multi-band Transmission Analysis

|                           | Position  | Applicable Combination                          |
|---------------------------|-----------|-------------------------------------------------|
| Simultaneous Transmission | Head      | 1x CDMA (voice) + LTE (data) + WLAN 2.4GHz Band |
|                           |           | 1x CDMA (voice) + LTE (data) + Bluetooth        |
|                           |           | 1x CDMA (voice) + WLAN 2.4GHz Band              |
|                           |           | 1x CDMA (voice) + WLAN 5GHz Band                |
|                           |           | 1x CDMA (voice) + Bluetooth                     |
|                           | Hotspot   | 1x CDMA (data)/LTE(data) + WLAN 2.4GHz Band     |
|                           |           | 1x CDMA (data) /LTE(data) + Bluetooth           |
|                           | Body-worn | 1x CDMA (voice) + LTE (data) + WLAN 2.4GHz Band |
|                           |           | 1x CDMA (voice) + LTE (data) + Bluetooth        |
|                           |           | 1x CDMA (voice) + WLAN 2.4GHz Band              |
|                           |           | 1x CDMA (voice) + WLAN 5GHz Band                |
|                           |           | 1x CDMA (voice) + Bluetooth                     |

**Note:**

- WLAN 2.4GHz Band and Bluetooth share the same antenna, and cannot transmit simultaneously.
- By design, WLAN 5GHz frequency band does not support mobile hotspot operation.
- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, they will not transmit simultaneously.
- The Reported SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v05, simultaneous transmission SAR is compliant if,
  - Scalar SAR summation < 1.6W/kg.
  - $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\min. \text{ separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$ , where  $(x_1, y_1, z_1)$  and  $(x_2, y_2, z_2)$  are the coordinates of the extrapolated peak SAR locations in the zoom scan  
If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary
  - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05 based on the formula below.
  - $(\max. \text{ power of channel, including tune-up tolerance, mW}) / (\min. \text{ test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$   
for test separation distances  $\leq 50 \text{ mm}$ ; where  $x = 7.5$  for 1-g SAR.
  - 0.4 W/kg for 1-g SAR, when the test separation distances is > 50 mm.

In this report, 50mm separation is applied to conservatively estimate SAR value for separation distance > 50mm.

| Maximum Power | Exposure Position    | Head      | Hotspot   | Body-worn |
|---------------|----------------------|-----------|-----------|-----------|
|               | Test separation      | 0 mm      | 10 mm     | 10 mm     |
| 1 dBm         | Estimated SAR (W/kg) | 0.053W/kg | 0.026W/kg | 0.026W/kg |

**The implemented power combinations**

| SVLTE Mode         |                                             |
|--------------------|---------------------------------------------|
| Voice Mode         | Data Mode:<br>Maximum power                 |
| 1xRTT BC0/BC1/BC10 | LTE Band 25<br>BW=1.4/3/5/10MHz<br>QPSK 1RB |
| ≤17 dBm            | 24.5 dBm                                    |
| >17 dBm            | 18 dBm                                      |

**Alternative combinations (Unit: dBm) – For analysis purpose only**

| Power combination | CDMA2000 1x voice                               | LTE data mode              |
|-------------------|-------------------------------------------------|----------------------------|
| #1                | <b>Full Power</b><br>BC0/BC10: 25<br>BC1: 24    | <b>Full Power</b><br>24.5  |
| #2                | <b>Reduced Power</b><br>BC0/BC10: 17<br>BC1: 17 | <b>Full Power</b><br>24.5  |
| #3                | <b>Full Power</b><br>BC0/BC10: 25<br>BC1: 24    | <b>Reduced Power</b><br>18 |

**Note:**

- For SVLTE mode which means LTE (data) and CDMA 1xRTT (voice) transmitting simultaneously, power reduction is implemented.
- When EUT 1xRTT output power is > 17dBm, LTE maximum output power is limited to 18dBm regardless of the power control command from the base station.

**Analysis Procedure:**
**Step1**

- Per KDB 941225 D05, maximum power standalone SAR of 1xRTT/EVDO/LTE is used for simultaneous transmission analysis.
- Start analysis from full power combination (Alternative Power combination #1).
- If 1g-SAR scalar summation < 1.6W/kg, simultaneous SAR measurement and further evaluations are not necessary.
- If 1g-SAR summation > 1.6W/kg, SPLSR calculation is necessary.
- If resulting SPLSR ≤ 0.04, further evaluation is not required.
- If resulting SPLSR > 0.04, step2 analysis is required.

**Step2**

- For the cases from step1, power combinations #2/#3 are used in further step2 analysis.
- If 1g-SAR scalar summation < 1.6W/kg, simultaneous SAR measurement and further evaluations are not necessary.
- If resulting SPLSR ≤ 0.04, further evaluation is not required.
- If resulting SPLSR > 0.04, volume scan measurement is required.

## 12.7 Head Co-location Simultaneous Transmission Analysis

**Table 12.7-A1: Head mode SAR analysis**

|                           | Position | Applicable Combination                          |
|---------------------------|----------|-------------------------------------------------|
| Simultaneous Transmission | Head     | 1x CDMA (voice) + LTE (data) + WLAN 2.4GHz Band |
|                           |          | 1x CDMA (voice) + LTE (data) + Bluetooth        |
|                           |          | 1x CDMA (voice) + WLAN 2.4GHz Band              |
|                           |          | 1x CDMA (voice) + WLAN 5GHz Band                |
|                           |          | 1x CDMA (voice) + Bluetooth                     |

| Position     | WWAN (voice)  |         |                     |                      | WWAN (data) |         |                     |                      | WLAN 2.4GHz Band |                     |                      | WWAN + WLAN 2.4GHz Band (W/kg) | Step   | SPLSR | Case No |
|--------------|---------------|---------|---------------------|----------------------|-------------|---------|---------------------|----------------------|------------------|---------------------|----------------------|--------------------------------|--------|-------|---------|
|              | WWAN Band     | Plot No | Average Power (dBm) | Max. WWAN SAR (W/kg) | WWAN Band   | Plot No | Average Power (dBm) | Max. WWAN SAR (W/kg) | Plot No          | Average Power (dBm) | Max. WLAN SAR (W/kg) |                                |        |       |         |
| Right Cheek  | CDMA2000 BC0  | 5       | 24.70               | 0.896                | LTE Band 25 | 20      | 24.27               | 0.853                | 34               | 14.38               | 0.014                | 1.76                           | Step 1 | 0.04  | #A1-1   |
|              | CDMA2000 BC1  | 12      | 23.64               | 0.563                | LTE Band 25 | 20      | 24.27               | 0.853                | 34               | 14.38               | 0.014                | 1.43                           |        |       |         |
|              | CDMA2000 BC10 | 13      | 24.83               | 0.854                | LTE Band 25 | 20      | 24.27               | 0.853                | 34               | 14.38               | 0.014                | 1.72                           | Step 1 | 0.04  | #A1-2   |
| Right Tilted | CDMA2000 BC0  | 2       | 24.81               | 0.615                | LTE Band 25 | 21      | 24.27               | 0.538                | 35               | 14.38               | 0.023                | 1.18                           |        |       |         |
|              | CDMA2000 BC1  | 9       | 23.72               | 0.186                | LTE Band 25 | 21      | 24.27               | 0.538                | 35               | 14.38               | 0.023                | 0.75                           |        |       |         |
|              | CDMA2000 BC10 | 14      | 24.83               | 0.571                | LTE Band 25 | 21      | 24.27               | 0.538                | 35               | 14.38               | 0.023                | 1.13                           |        |       |         |
| Left Cheek   | CDMA2000 BC0  | 3       | 24.81               | 0.751                | LTE Band 25 | 22      | 24.27               | 0.547                | 36               | 14.38               | 0.019                | 1.32                           |        |       |         |
|              | CDMA2000 BC1  | 10      | 23.72               | 0.542                | LTE Band 25 | 22      | 24.27               | 0.547                | 36               | 14.38               | 0.019                | 1.11                           |        |       |         |
|              | CDMA2000 BC10 | 15      | 24.83               | 0.791                | LTE Band 25 | 22      | 24.27               | 0.547                | 36               | 14.38               | 0.019                | 1.36                           |        |       |         |
| Left Tilted  | CDMA2000 BC0  | 4       | 24.81               | 0.535                | LTE Band 25 | 23      | 24.27               | 0.603                | 37               | 14.38               | 0.016                | 1.15                           |        |       |         |
|              | CDMA2000 BC1  | 11      | 23.72               | 0.164                | LTE Band 25 | 23      | 24.27               | 0.603                | 37               | 14.38               | 0.016                | 0.78                           |        |       |         |
|              | CDMA2000 BC10 | 16      | 24.83               | 0.542                | LTE Band 25 | 23      | 24.27               | 0.603                | 37               | 14.38               | 0.016                | 1.16                           |        |       |         |

| Position     | WWAN (voice)  |         |                     |                      | WWAN (data) |         |                     |                      | Bluetooth           |                                | WWAN + Bluetooth (W/kg) | Step   | SPLSR | Case No |
|--------------|---------------|---------|---------------------|----------------------|-------------|---------|---------------------|----------------------|---------------------|--------------------------------|-------------------------|--------|-------|---------|
|              | WWAN Band     | Plot No | Average Power (dBm) | Max. WWAN SAR (W/kg) | WWAN Band   | Plot No | Average Power (dBm) | Max. WWAN SAR (W/kg) | Average Power (dBm) | Estimated Bluetooth SAR (W/kg) |                         |        |       |         |
| Right Cheek  | CDMA2000 BC0  | 5       | 24.7                | 0.896                | LTE Band 25 | 20      | 24.27               | 0.853                | 1                   | 0.053                          | 1.80                    | Step 1 | 0.04  | #A1-3   |
|              | CDMA2000 BC1  | 12      | 23.64               | 0.563                | LTE Band 25 | 20      | 24.27               | 0.853                | 1                   | 0.053                          | 1.47                    |        |       |         |
|              | CDMA2000 BC10 | 13      | 24.83               | 0.854                | LTE Band 25 | 20      | 24.27               | 0.853                | 1                   | 0.053                          | 1.76                    | Step 1 | 0.04  | #A1-4   |
| Right Tilted | CDMA2000 BC0  | 2       | 24.81               | 0.615                | LTE Band 25 | 21      | 24.27               | 0.538                | 1                   | 0.053                          | 1.21                    |        |       |         |
|              | CDMA2000 BC1  | 9       | 23.72               | 0.186                | LTE Band 25 | 21      | 24.27               | 0.538                | 1                   | 0.053                          | 0.78                    |        |       |         |
|              | CDMA2000 BC10 | 14      | 24.83               | 0.571                | LTE Band 25 | 21      | 24.27               | 0.538                | 1                   | 0.053                          | 1.16                    |        |       |         |
| Left Cheek   | CDMA2000 BC0  | 3       | 24.81               | 0.751                | LTE Band 25 | 22      | 24.27               | 0.547                | 1                   | 0.053                          | 1.35                    |        |       |         |
|              | CDMA2000 BC1  | 10      | 23.72               | 0.542                | LTE Band 25 | 22      | 24.27               | 0.547                | 1                   | 0.053                          | 1.14                    |        |       |         |
|              | CDMA2000 BC10 | 15      | 24.83               | 0.791                | LTE Band 25 | 22      | 24.27               | 0.547                | 1                   | 0.053                          | 1.39                    |        |       |         |
| Left Tilted  | CDMA2000 BC0  | 4       | 24.81               | 0.535                | LTE Band 25 | 23      | 24.27               | 0.603                | 1                   | 0.053                          | 1.19                    |        |       |         |
|              | CDMA2000 BC1  | 11      | 23.72               | 0.164                | LTE Band 25 | 23      | 24.27               | 0.603                | 1                   | 0.053                          | 0.82                    |        |       |         |
|              | CDMA2000 BC10 | 16      | 24.83               | 0.542                | LTE Band 25 | 23      | 24.27               | 0.603                | 1                   | 0.053                          | 1.20                    |        |       |         |

**Remark:** #A1-1, #A1-2, #A1-3 and #A1-4 resulting SPLSR ≤ 0.04, step2 analysis is not required.

| Position     | WWAN (voice)  |         |                     |                      | WLAN 2.4GHz Band |                     |                      | WWAN + WLAN 2.4GHz Band (W/kg) | SPLSR | Case No |
|--------------|---------------|---------|---------------------|----------------------|------------------|---------------------|----------------------|--------------------------------|-------|---------|
|              | WWAN Band     | Plot No | Average Power (dBm) | Max. WWAN SAR (W/kg) | Plot No          | Average Power (dBm) | Max. WLAN SAR (W/kg) |                                |       |         |
| Right Cheek  | CDMA2000 BC0  | 5       | 24.70               | 0.896                | 34               | 14.38               | 0.014                | <b>0.91</b>                    |       |         |
|              | CDMA2000 BC1  | 12      | 23.64               | 0.563                | 34               | 14.38               | 0.014                | <b>0.58</b>                    |       |         |
|              | CDMA2000 BC10 | 13      | 24.83               | 0.854                | 34               | 14.38               | 0.014                | <b>0.87</b>                    |       |         |
|              | LTE Band 25   | 20      | 24.27               | 0.853                | 34               | 14.38               | 0.014                | <b>0.87</b>                    |       |         |
| Right Tilted | CDMA2000 BC0  | 2       | 24.81               | 0.615                | 35               | 14.38               | 0.023                | <b>0.64</b>                    |       |         |
|              | CDMA2000 BC1  | 9       | 23.72               | 0.186                | 35               | 14.38               | 0.023                | <b>0.21</b>                    |       |         |
|              | CDMA2000 BC10 | 14      | 24.83               | 0.571                | 35               | 14.38               | 0.023                | <b>0.59</b>                    |       |         |
|              | LTE Band 25   | 21      | 24.27               | 0.538                | 35               | 14.38               | 0.023                | <b>0.56</b>                    |       |         |
| Left Cheek   | CDMA2000 BC0  | 3       | 24.81               | 0.751                | 36               | 14.38               | 0.019                | <b>0.77</b>                    |       |         |
|              | CDMA2000 BC1  | 10      | 23.72               | 0.542                | 36               | 14.38               | 0.019                | <b>0.56</b>                    |       |         |
|              | CDMA2000 BC10 | 15      | 24.83               | 0.791                | 36               | 14.38               | 0.019                | <b>0.81</b>                    |       |         |
|              | LTE Band 25   | 22      | 24.27               | 0.547                | 36               | 14.38               | 0.019                | <b>0.57</b>                    |       |         |
| Left Tilted  | CDMA2000 BC0  | 4       | 24.81               | 0.535                | 37               | 14.38               | 0.016                | <b>0.55</b>                    |       |         |
|              | CDMA2000 BC1  | 11      | 23.72               | 0.164                | 37               | 14.38               | 0.016                | <b>0.18</b>                    |       |         |
|              | CDMA2000 BC10 | 16      | 24.83               | 0.542                | 37               | 14.38               | 0.016                | <b>0.56</b>                    |       |         |
|              | LTE Band 25   | 23      | 24.27               | 0.603                | 37               | 14.38               | 0.016                | <b>0.62</b>                    |       |         |

| Position     | WWAN (voice)  |         |                     |                      | WLAN 5GHz Band |                     |                      | WWAN + WLAN 5GHz Band (W/kg) | SPLSR | Case No |
|--------------|---------------|---------|---------------------|----------------------|----------------|---------------------|----------------------|------------------------------|-------|---------|
|              | WWAN Band     | Plot No | Average Power (dBm) | Max. WWAN SAR (W/kg) | Plot No        | Average Power (dBm) | Max. WLAN SAR (W/kg) |                              |       |         |
| Right Cheek  | CDMA2000 BC0  | 5       | 24.70               | 0.896                | 38             | 12.70               | 0.168                | <b>1.06</b>                  |       |         |
|              | CDMA2000 BC1  | 12      | 23.64               | 0.563                | 38             | 12.70               | 0.168                | <b>0.73</b>                  |       |         |
|              | CDMA2000 BC10 | 13      | 24.83               | 0.854                | 38             | 12.70               | 0.168                | <b>1.02</b>                  |       |         |
|              | LTE Band 25   | 20      | 24.27               | 0.853                | 38             | 12.70               | 0.168                | <b>1.02</b>                  |       |         |
| Right Tilted | CDMA2000 BC0  | 2       | 24.81               | 0.615                | 39             | 12.70               | 0.104                | <b>0.72</b>                  |       |         |
|              | CDMA2000 BC1  | 9       | 23.72               | 0.186                | 39             | 12.70               | 0.104                | <b>0.29</b>                  |       |         |
|              | CDMA2000 BC10 | 14      | 24.83               | 0.571                | 39             | 12.70               | 0.104                | <b>0.68</b>                  |       |         |
|              | LTE Band 25   | 21      | 24.27               | 0.538                | 39             | 12.70               | 0.104                | <b>0.64</b>                  |       |         |
| Left Cheek   | CDMA2000 BC0  | 3       | 24.81               | 0.751                | 40             | 12.70               | 0.328                | <b>1.08</b>                  |       |         |
|              | CDMA2000 BC1  | 10      | 23.72               | 0.542                | 40             | 12.70               | 0.328                | <b>0.87</b>                  |       |         |
|              | CDMA2000 BC10 | 15      | 24.83               | 0.791                | 40             | 12.70               | 0.328                | <b>1.12</b>                  |       |         |
|              | LTE Band 25   | 22      | 24.27               | 0.547                | 40             | 12.70               | 0.328                | <b>0.88</b>                  |       |         |
| Left Tilted  | CDMA2000 BC0  | 4       | 24.81               | 0.535                | 41             | 12.70               | 0.139                | <b>0.67</b>                  |       |         |
|              | CDMA2000 BC1  | 11      | 23.72               | 0.164                | 41             | 12.70               | 0.139                | <b>0.30</b>                  |       |         |
|              | CDMA2000 BC10 | 16      | 24.83               | 0.542                | 41             | 12.70               | 0.139                | <b>0.68</b>                  |       |         |
|              | LTE Band 25   | 23      | 24.27               | 0.603                | 41             | 12.70               | 0.139                | <b>0.74</b>                  |       |         |



| Position     | WWAN (voice)  |         |                     |                      | Bluetooth           |                      | WWAN + Bluetooth (W/kg) | SPLSR | Case No |
|--------------|---------------|---------|---------------------|----------------------|---------------------|----------------------|-------------------------|-------|---------|
|              | WWAN Band     | Plot No | Average Power (dBm) | Max. WWAN SAR (W/kg) | Average Power (dBm) | Max. WLAN SAR (W/kg) |                         |       |         |
| Right Cheek  | CDMA2000 BC0  | 5       | 24.70               | 0.896                | 1                   | 0.053                | <b>0.95</b>             |       |         |
|              | CDMA2000 BC1  | 12      | 23.64               | 0.563                | 1                   | 0.053                | <b>0.62</b>             |       |         |
|              | CDMA2000 BC10 | 13      | 24.83               | 0.854                | 1                   | 0.053                | <b>0.91</b>             |       |         |
|              | LTE Band 25   | 20      | 24.27               | 0.853                | 1                   | 0.053                | <b>0.91</b>             |       |         |
| Right Tilted | CDMA2000 BC0  | 2       | 24.81               | 0.615                | 1                   | 0.053                | <b>0.67</b>             |       |         |
|              | CDMA2000 BC1  | 9       | 23.72               | 0.186                | 1                   | 0.053                | <b>0.24</b>             |       |         |
|              | CDMA2000 BC10 | 14      | 24.83               | 0.571                | 1                   | 0.053                | <b>0.62</b>             |       |         |
|              | LTE Band 25   | 21      | 24.27               | 0.538                | 1                   | 0.053                | <b>0.59</b>             |       |         |
| Left Cheek   | CDMA2000 BC0  | 3       | 24.81               | 0.751                | 1                   | 0.053                | <b>0.80</b>             |       |         |
|              | CDMA2000 BC1  | 10      | 23.72               | 0.542                | 1                   | 0.053                | <b>0.60</b>             |       |         |
|              | CDMA2000 BC10 | 15      | 24.83               | 0.791                | 1                   | 0.053                | <b>0.84</b>             |       |         |
|              | LTE Band 25   | 22      | 24.27               | 0.547                | 1                   | 0.053                | <b>0.60</b>             |       |         |
| Left Tilted  | CDMA2000 BC0  | 4       | 24.81               | 0.535                | 1                   | 0.053                | <b>0.59</b>             |       |         |
|              | CDMA2000 BC1  | 11      | 23.72               | 0.164                | 1                   | 0.053                | <b>0.22</b>             |       |         |
|              | CDMA2000 BC10 | 16      | 24.83               | 0.542                | 1                   | 0.053                | <b>0.60</b>             |       |         |
|              | LTE Band 25   | 23      | 24.27               | 0.603                | 1                   | 0.053                | <b>0.66</b>             |       |         |

**Remark:** The SAR summation represents the simultaneous transmission of a WWAN voice call and WLAN data transmission.

## 12.8 Hotspot Co-location Simultaneous Transmission Analysis

**Table 12.8-B1: Hotspot mode SAR analysis**

Refer to Exposure Positions Consideration in section 11

| Positions for SAR tests; Hotspot mode<br>Test distance: 10 mm |      |       |          |             |            |           |
|---------------------------------------------------------------|------|-------|----------|-------------|------------|-----------|
| Antennas                                                      | Back | Front | Top Side | Bottom Side | Right Side | Left Side |
| CDMA 1xRTT / EVDO                                             | Yes  | Yes   | NO       | Yes         | Yes        | Yes       |
| LTE                                                           | Yes  | Yes   | Yes      | NO          | NO         | Yes       |
| WLAN & Bluetooth                                              | Yes  | Yes   | NO       | NO          | Yes        | NO        |

|                           | Position | Applicable Combination                      |
|---------------------------|----------|---------------------------------------------|
| Simultaneous Transmission | Hotspot  | 1x CDMA (data)/LTE(data) + WLAN 2.4GHz Band |
|                           |          | 1x CDMA (data) /LTE(data) + Bluetooth       |

| Position    | WWAN (data)   |         |                     |                      | WLAN 2.4GHz Band |                     |                      | WWAN + WLAN 2.4GHz Band (W/kg) | SPLSR | Case No |
|-------------|---------------|---------|---------------------|----------------------|------------------|---------------------|----------------------|--------------------------------|-------|---------|
|             | WWAN Band     | Plot No | Average Power (dBm) | Max. WWAN SAR (W/kg) | Plot No          | Average Power (dBm) | Max. WLAN SAR (W/kg) |                                |       |         |
| Front       | CDMA2000 BC0  | 51      | 24.68               | 0.973                | 128              | 14.38               | 0.003                | 0.98                           |       |         |
|             | CDMA2000 BC1  | 64      | 23.68               | 0.787                | 128              | 14.38               | 0.003                | 0.79                           |       |         |
|             | CDMA2000 BC10 | 90      | 24.73               | 1.006                | 128              | 14.38               | 0.003                | 1.01                           |       |         |
|             | LTE Band 25   | 107     | 24.27               | 0.423                | 128              | 14.38               | 0.003                | 0.43                           |       |         |
| Back        | CDMA2000 BC0  | 47      | 24.83               | 0.695                | 129              | 14.38               | 0.023                | 0.72                           |       |         |
|             | CDMA2000 BC1  | 70      | 23.5                | 1.425                | 129              | 14.38               | 0.023                | 1.45                           |       |         |
|             | CDMA2000 BC10 | 92      | 24.73               | 0.914                | 129              | 14.38               | 0.023                | 0.94                           |       |         |
|             | LTE Band 25   | 108     | 24.27               | 1.065                | 129              | 14.38               | 0.023                | 1.09                           |       |         |
| Left Side   | CDMA2000 BC0  | 48      | 24.83               | 0.766                | -                | -                   | -                    | 0.77                           |       |         |
|             | CDMA2000 BC1  | 66      | 23.68               | 0.358                | -                | -                   | -                    | 0.36                           |       |         |
|             | CDMA2000 BC10 | 86      | 24.84               | 0.983                | -                | -                   | -                    | 0.98                           |       |         |
|             | LTE Band 25   | 109     | 24.27               | 0.895                | -                | -                   | -                    | 0.90                           |       |         |
| Right Side  | CDMA2000 BC0  | 55      | 24.68               | 1.013                | 130              | 14.38               | 0.011                | 1.02                           |       |         |
|             | CDMA2000 BC1  | 67      | 23.68               | 0.168                | 130              | 14.38               | 0.011                | 0.18                           |       |         |
|             | CDMA2000 BC10 | 87      | 24.84               | 1.020                | 130              | 14.38               | 0.011                | 1.03                           |       |         |
|             | LTE Band 25   | -       | -                   | -                    | 130              | 14.38               | 0.011                | 0.01                           |       |         |
| Top Side    | CDMA2000 BC0  | -       | -                   | -                    | -                | -                   | -                    | -                              |       |         |
|             | CDMA2000 BC1  | -       | -                   | -                    | -                | -                   | -                    | -                              |       |         |
|             | CDMA2000 BC10 | -       | -                   | -                    | -                | -                   | -                    | -                              |       |         |
|             | LTE Band 25   | 110     | 24.27               | 0.228                | -                | -                   | -                    | 0.23                           |       |         |
| Bottom Side | CDMA2000 BC0  | 50      | 24.83               | 0.132                | -                | -                   | -                    | 0.13                           |       |         |
|             | CDMA2000 BC1  | 73      | 23.5                | 1.414                | -                | -                   | -                    | 1.41                           |       |         |
|             | CDMA2000 BC10 | 89      | 24.84               | 0.117                | -                | -                   | -                    | 0.12                           |       |         |
|             | LTE Band 25   | -       | -                   | -                    | -                | -                   | -                    | -                              |       |         |





| Position    | WWAN (data)   |         |                     |                      | Bluetooth           |                                | WWAN + Bluetooth (W/kg) | SPLSR | Case No |
|-------------|---------------|---------|---------------------|----------------------|---------------------|--------------------------------|-------------------------|-------|---------|
|             | WWAN Band     | Plot No | Average Power (dBm) | Max. WWAN SAR (W/kg) | Average Power (dBm) | Estimated Bluetooth SAR (W/kg) |                         |       |         |
| Front       | CDMA2000 BC0  | 51      | 24.68               | 0.973                | 1                   | 0.026                          | 1.00                    |       |         |
|             | CDMA2000 BC1  | 64      | 23.68               | 0.787                | 1                   | 0.026                          | 0.81                    |       |         |
|             | CDMA2000 BC10 | 90      | 24.73               | 1.006                | 1                   | 0.026                          | 1.03                    |       |         |
|             | LTE Band 25   | 107     | 24.27               | 0.423                | 1                   | 0.026                          | 0.45                    |       |         |
| Back        | CDMA2000 BC0  | 47      | 24.83               | 0.695                | 1                   | 0.026                          | 0.72                    |       |         |
|             | CDMA2000 BC1  | 70      | 23.5                | 1.425                | 1                   | 0.026                          | 1.45                    |       |         |
|             | CDMA2000 BC10 | 92      | 24.73               | 0.914                | 1                   | 0.026                          | 0.94                    |       |         |
|             | LTE Band 25   | 108     | 24.27               | 1.065                | 1                   | 0.026                          | 1.09                    |       |         |
| Left Side   | CDMA2000 BC0  | 48      | 24.83               | 0.766                | 1                   | 0.026                          | 0.79                    |       |         |
|             | CDMA2000 BC1  | 66      | 23.68               | 0.358                | 1                   | 0.026                          | 0.38                    |       |         |
|             | CDMA2000 BC10 | 86      | 24.84               | 0.983                | 1                   | 0.026                          | 1.01                    |       |         |
|             | LTE Band 25   | 109     | 24.27               | 0.895                | 1                   | 0.026                          | 0.92                    |       |         |
| Right Side  | CDMA2000 BC0  | 55      | 24.68               | 1.013                | 1                   | 0.026                          | 1.04                    |       |         |
|             | CDMA2000 BC1  | 67      | 23.68               | 0.168                | 1                   | 0.026                          | 0.19                    |       |         |
|             | CDMA2000 BC10 | 87      | 24.84               | 1.020                | 1                   | 0.026                          | 1.05                    |       |         |
|             | LTE Band 25   | -       | -                   | -                    | 1                   | 0.026                          | 0.03                    |       |         |
| Top Side    | CDMA2000 BC0  | -       | -                   | -                    | 1                   | 0.026                          | 0.03                    |       |         |
|             | CDMA2000 BC1  | -       | -                   | -                    | 1                   | 0.026                          | 0.03                    |       |         |
|             | CDMA2000 BC10 | -       | -                   | -                    | 1                   | 0.026                          | 0.03                    |       |         |
|             | LTE Band 25   | 110     | 24.27               | 0.228                | 1                   | 0.026                          | 0.25                    |       |         |
| Bottom Side | CDMA2000 BC0  | 50      | 24.83               | 0.132                | 1                   | 0.026                          | 0.16                    |       |         |
|             | CDMA2000 BC1  | 73      | 23.5                | 1.414                | 1                   | 0.026                          | 1.44                    |       |         |
|             | CDMA2000 BC10 | 89      | 24.84               | 0.117                | 1                   | 0.026                          | 0.14                    |       |         |
|             | LTE Band 25   | -       | -                   | -                    | 1                   | 0.026                          | 0.03                    |       |         |

## 12.9 Body-Worn Co-location Simultaneous Transmission Analysis

**Table 12.9-C1: Body-worn mode SAR analysis**

|                                  | Position         | Applicable Combination                          |
|----------------------------------|------------------|-------------------------------------------------|
| <b>Simultaneous Transmission</b> | <b>Body-worn</b> | 1x CDMA (voice) + LTE (data) + WLAN 2.4GHz Band |
|                                  |                  | 1x CDMA (voice) + LTE (data) + Bluetooth        |
|                                  |                  | 1x CDMA (voice) + WLAN 2.4GHz Band              |
|                                  |                  | 1x CDMA (voice) + WLAN 5GHz Band                |
|                                  |                  | 1x CDMA (voice) + Bluetooth                     |

|                          | WWAN (voice)  |         |                     |                      | WWAN (data) |         |                     |                      | WLAN 2.4GHz Band |                     |                      | WWAN + WLAN 2.4GHz Band (W/kg) | Step   | SPLSR | Case No |
|--------------------------|---------------|---------|---------------------|----------------------|-------------|---------|---------------------|----------------------|------------------|---------------------|----------------------|--------------------------------|--------|-------|---------|
| Position                 | WWAN Band     | Plot No | Average Power (dBm) | Max. WWAN SAR (W/kg) | WWAN Band   | Plot No | Average Power (dBm) | Max. WWAN SAR (W/kg) | Plot No          | Average Power (dBm) | Max. WLAN SAR (W/kg) |                                |        |       |         |
| <b>Front</b>             | CDMA2000 BC0  | 59      | 24.68               | 0.989                | LTE Band 25 | 107     | 24.27               | 0.423                | 128              | 14.38               | 0.003                | <b>1.42</b>                    |        |       |         |
|                          | CDMA2000 BC1  | 74      | 23.76               | 0.727                | LTE Band 25 | 107     | 24.27               | 0.423                | 128              | 14.38               | 0.003                | <b>1.15</b>                    |        |       |         |
|                          | CDMA2000 BC10 | 100     | 24.73               | 0.997                | LTE Band 25 | 107     | 24.27               | 0.423                | 128              | 14.38               | 0.003                | <b>1.42</b>                    |        |       |         |
| <b>Back</b>              | CDMA2000 BC0  | 58      | 24.84               | 0.680                | LTE Band 25 | 108     | 24.27               | 1.065                | 129              | 14.38               | 0.023                | <b>1.77</b>                    | Step1  | 0.09  | #C1-1   |
|                          | CDMA2000 BC0  | 58      | 24.84               | 0.680                | LTE Band 25 | 140     | 17.69               | 0.271                | 129              | 14.38               | 0.023                | <b>0.97</b>                    | Step 2 |       |         |
|                          | CDMA2000 BC0  | 138     | 16.91               | 0.116                | LTE Band 25 | 108     | 24.27               | 1.065                | 129              | 14.38               | 0.023                | <b>1.20</b>                    |        |       |         |
|                          | CDMA2000 BC1  | 78      | 23.43               | 1.425                | LTE Band 25 | 108     | 24.27               | 1.065                | 129              | 14.38               | 0.023                | <b>2.51</b>                    | Step1  | 0.04  | #C1-2   |
|                          | CDMA2000 BC10 | 99      | 24.82               | 0.937                | LTE Band 25 | 108     | 24.27               | 1.065                | 129              | 14.38               | 0.023                | <b>2.03</b>                    | Step1  | 0.06  | #C1-3   |
|                          | CDMA2000 BC10 | 99      | 24.82               | 0.937                | LTE Band 25 | 140     | 17.69               | 0.271                | 129              | 14.38               | 0.023                | <b>1.23</b>                    | Step 2 |       |         |
|                          | CDMA2000 BC10 | 139     | 16.93               | 0.151                | LTE Band 25 | 108     | 24.27               | 1.065                | 129              | 14.38               | 0.023                | <b>1.24</b>                    |        |       |         |
| <b>Back (w/ headset)</b> | CDMA2000 BC0  | -       | -                   | -                    | -           | -       | -                   | -                    | 131              | 14.38               | 0.025                | <b>0.03</b>                    |        |       |         |
|                          | CDMA2000 BC1  | -       | -                   | -                    | -           | -       | -                   | -                    | 131              | 14.38               | 0.025                | <b>0.03</b>                    |        |       |         |
|                          | CDMA2000 BC10 | 81      | 23.43               | 1.437                | LTE Band 25 | 117     | 24.15               | 0.995                | 131              | 14.38               | 0.025                | <b>2.46</b>                    | Step1  | 0.03  | #C1-4   |

| Position          | WWAN (voice)  |         |                     |                      | WWAN (data) |         |                     |                      | Bluetooth           |                                | WWAN + Bluetooth (W/kg) | Step   | SPLSR | Case No |
|-------------------|---------------|---------|---------------------|----------------------|-------------|---------|---------------------|----------------------|---------------------|--------------------------------|-------------------------|--------|-------|---------|
|                   | WWAN Band     | Plot No | Average Power (dBm) | Max. WWAN SAR (W/kg) | WWAN Band   | Plot No | Average Power (dBm) | Max. WWAN SAR (W/kg) | Average Power (dBm) | Estimated Bluetooth SAR (W/kg) |                         |        |       |         |
| Front             | CDMA2000 BC0  | 59      | 24.68               | 0.989                | LTE Band 25 | 107     | 24.27               | 0.423                | 1                   | 0.026                          | 1.44                    |        |       |         |
|                   | CDMA2000 BC1  | 74      | 23.76               | 0.727                | LTE Band 25 | 107     | 24.27               | 0.423                | 1                   | 0.026                          | 1.18                    |        |       |         |
|                   | CDMA2000 BC10 | 100     | 24.73               | 0.997                | LTE Band 25 | 107     | 24.27               | 0.423                | 1                   | 0.026                          | 1.45                    |        |       |         |
| Back              | CDMA2000 BC0  | 58      | 24.84               | 0.680                | LTE Band 25 | 108     | 24.27               | 1.065                | 1                   | 0.026                          | 1.77                    | Step 1 | 0.09  | #C1-5   |
|                   | CDMA2000 BC0  | 58      | 24.84               | 0.680                | LTE Band 25 | 140     | 17.69               | 0.271                | 1                   | 0.026                          | 0.98                    | Step 2 |       |         |
|                   | CDMA2000 BC0  | 138     | 16.91               | 0.116                | LTE Band 25 | 108     | 24.27               | 1.065                | 1                   | 0.026                          | 1.21                    |        |       |         |
|                   | CDMA2000 BC1  | 78      | 23.43               | 1.425                | LTE Band 25 | 108     | 24.27               | 1.065                | 1                   | 0.026                          | 2.52                    | Step1  | 0.04  | #C1-6   |
|                   | CDMA2000 BC10 | 99      | 24.82               | 0.937                | LTE Band 25 | 108     | 24.27               | 1.065                | 1                   | 0.026                          | 2.03                    | Step 1 | 0.06  | #C1-7   |
|                   | CDMA2000 BC10 | 99      | 24.82               | 0.937                | LTE Band 25 | 140     | 17.69               | 0.271                | 1                   | 0.026                          | 1.23                    | Step 2 |       |         |
|                   | CDMA2000 BC10 | 139     | 16.93               | 0.151                | LTE Band 25 | 108     | 24.27               | 1.065                | 1                   | 0.026                          | 1.24                    |        |       |         |
| Back (w/ headset) | CDMA2000 BC0  | -       | -                   | -                    | -           | -       | -                   | -                    | 1                   | 0.026                          | 0.03                    |        |       |         |
|                   | CDMA2000 BC1  | -       | -                   | -                    | -           | -       | -                   | -                    | 1                   | 0.026                          | 0.03                    |        |       |         |
|                   | CDMA2000 BC10 | 81      | 23.43               | 1.437                | LTE Band 25 | 117     | 24.15               | 0.995                | 1                   | 0.026                          | 2.46                    | Step1  | 0.03  | #C1-8   |

**Remark:**

- #C1-1, #C1-3, #C1-5 and #C1-7 resulting SPLSR > 0.04, step2 analysis is required.
- The SAR summation represents the simultaneous transmission of, a WWAN voice call and WWAN data transmission and WLAN as hotspot router; 3 transmitters operating at the same time.
- The analysis above will represent the compliance of the simultaneous transmission of a WWAN voice call and WWAN data transmission, since the possible WWAN output power configuration in SVLTE mode( 2 transmitters) is exactly the same as the configuration in SVLTE+WLAN (3 transmitters).

| Position          | WWAN (voice)  |         |                     |                      | WLAN 2.4GHz Band |                     |                      | WWAN + WLAN 2.4GHz Band (W/kg) | SPLSR | Case No |
|-------------------|---------------|---------|---------------------|----------------------|------------------|---------------------|----------------------|--------------------------------|-------|---------|
|                   | WWAN Band     | Plot No | Average Power (dBm) | Max. WWAN SAR (W/kg) | Plot No          | Average Power (dBm) | Max. WLAN SAR (W/kg) |                                |       |         |
| Front             | CDMA2000 BC0  | 59      | 24.68               | 0.989                | 128              | 14.38               | 0.003                | 0.99                           |       |         |
|                   | CDMA2000 BC1  | 74      | 23.76               | 0.727                | 128              | 14.38               | 0.003                | 0.73                           |       |         |
|                   | CDMA2000 BC10 | 100     | 24.73               | 0.997                | 128              | 14.38               | 0.003                | 1.00                           |       |         |
|                   | LTE Band 25   | 107     | 24.27               | 0.423                | 128              | 14.38               | 0.003                | 0.43                           |       |         |
| Back              | CDMA2000 BC0  | 58      | 24.84               | 0.680                | 129              | 14.38               | 0.023                | 0.70                           |       |         |
|                   | CDMA2000 BC1  | 78      | 23.43               | 1.425                | 129              | 14.38               | 0.023                | 1.45                           |       |         |
|                   | CDMA2000 BC10 | 99      | 24.82               | 0.937                | 129              | 14.38               | 0.023                | 0.96                           |       |         |
|                   | LTE Band 25   | 108     | 24.27               | 1.065                | 129              | 14.38               | 0.023                | 1.09                           |       |         |
| Back (w/ headset) | CDMA2000 BC0  | -       | -                   | -                    | 131              | 14.38               | 0.025                | 0.03                           |       |         |
|                   | CDMA2000 BC1  | -       | -                   | -                    | 131              | 14.38               | 0.025                | 0.03                           |       |         |
|                   | CDMA2000 BC10 | 81      | 23.43               | 1.437                | 131              | 14.38               | 0.025                | 1.46                           |       |         |
|                   | LTE Band 25   | 117     | 24.15               | 0.995                | 131              | 14.38               | 0.025                | 1.02                           |       |         |


| Position          | WWAN (voice)  |         |                     |                      | WLAN 5GHz Band |                     |                      | WWAN + WLAN 5GHz Band (W/kg) | SPLSR | Case No |
|-------------------|---------------|---------|---------------------|----------------------|----------------|---------------------|----------------------|------------------------------|-------|---------|
|                   | WWAN Band     | Plot No | Average Power (dBm) | Max. WWAN SAR (W/kg) | Plot No        | Average Power (dBm) | Max. WLAN SAR (W/kg) |                              |       |         |
| Front             | CDMA2000 BC0  | 59      | 24.68               | 0.989                | 132            | 12.7                | 0.073                | 1.06                         |       |         |
|                   | CDMA2000 BC1  | 74      | 23.76               | 0.727                | 132            | 12.7                | 0.073                | 0.80                         |       |         |
|                   | CDMA2000 BC10 | 100     | 24.73               | 0.997                | 132            | 12.7                | 0.073                | 1.07                         |       |         |
|                   | LTE Band 25   | 107     | 24.27               | 0.423                | 132            | 12.7                | 0.073                | 0.50                         |       |         |
| Back              | CDMA2000 BC0  | 58      | 24.84               | 0.680                | 133            | 12.7                | 0.166                | 0.85                         |       |         |
|                   | CDMA2000 BC1  | 78      | 23.43               | 1.425                | 133            | 12.7                | 0.166                | 1.59                         |       |         |
|                   | CDMA2000 BC10 | 99      | 24.82               | 0.937                | 133            | 12.7                | 0.166                | 1.10                         |       |         |
|                   | LTE Band 25   | 108     | 24.27               | 1.065                | 133            | 12.7                | 0.166                | 1.23                         |       |         |
| Back (w/ headset) | CDMA2000 BC0  | -       | -                   | -                    | 134            | 12.7                | 0.152                | 0.15                         |       |         |
|                   | CDMA2000 BC1  | -       | -                   | -                    | 134            | 12.7                | 0.152                | 0.15                         |       |         |
|                   | CDMA2000 BC10 | 81      | 23.43               | 1.437                | 134            | 12.7                | 0.152                | 1.59                         |       |         |
|                   | LTE Band 25   | 117     | 24.15               | 0.995                | 134            | 12.7                | 0.152                | 1.15                         |       |         |

| Position          | WWAN (voice)  |         |                     |                      | Bluetooth           |                      | WWAN + Bluetooth (W/kg) | SPLSR | Case No |
|-------------------|---------------|---------|---------------------|----------------------|---------------------|----------------------|-------------------------|-------|---------|
|                   | WWAN Band     | Plot No | Average Power (dBm) | Max. WWAN SAR (W/kg) | Average Power (dBm) | Max. WLAN SAR (W/kg) |                         |       |         |
| Front             | CDMA2000 BC0  | 59      | 24.68               | 0.989                | 1                   | 0.026                | 1.02                    |       |         |
|                   | CDMA2000 BC1  | 74      | 23.76               | 0.727                | 1                   | 0.026                | 0.75                    |       |         |
|                   | CDMA2000 BC10 | 100     | 24.73               | 0.997                | 1                   | 0.026                | 1.02                    |       |         |
|                   | LTE Band 25   | 107     | 24.27               | 0.423                | 1                   | 0.026                | 0.45                    |       |         |
| Back              | CDMA2000 BC0  | 58      | 24.84               | 0.680                | 1                   | 0.026                | 0.71                    |       |         |
|                   | CDMA2000 BC1  | 78      | 23.43               | 1.425                | 1                   | 0.026                | 1.45                    |       |         |
|                   | CDMA2000 BC10 | 99      | 24.82               | 0.937                | 1                   | 0.026                | 0.96                    |       |         |
|                   | LTE Band 25   | 108     | 24.27               | 1.065                | 1                   | 0.026                | 1.09                    |       |         |
| Back (w/ headset) | CDMA2000 BC0  | -       | -                   | -                    | 1                   | 0.026                | 0.03                    |       |         |
|                   | CDMA2000 BC1  | -       | -                   | -                    | 1                   | 0.026                | 0.03                    |       |         |
|                   | CDMA2000 BC10 | 81      | 23.43               | 1.437                | 1                   | 0.026                | 1.46                    |       |         |
|                   | LTE Band 25   | 117     | 24.15               | 0.995                | 1                   | 0.026                | 1.02                    |       |         |


**Remark:** The SAR summation represents the simultaneous transmission of a WWAN voice call and WLAN data transmission.

**12.10 Simultaneous analysis - SPLSR calculation**


| Case No<br>#A1-1 | Band             | Position       | SAR<br>(W/kg) | Gap<br>(cm) | SAR peak location (m) |        |        | 3D distance<br>(mm) | Pair SAR sum<br>(W/kg) | SPLSR | Simultaneous<br>SAR |
|------------------|------------------|----------------|---------------|-------------|-----------------------|--------|--------|---------------------|------------------------|-------|---------------------|
| Plot No          |                  |                |               |             | X                     | Y      | Z      |                     |                        |       |                     |
| 5                | CDMA2000 BC0     | Right<br>Check | 0.896         | -           | 0.0635                | -0.276 | -0.174 | 57.6                | 1.75                   | 0.04  | Not required        |
| 20               | LTE Band 25      |                | 0.853         | -           | 0.0436                | -0.33  | -0.173 |                     |                        |       |                     |
| 5                | CDMA2000 BC0     |                | 0.896         | -           | 0.0635                | -0.276 | -0.174 | 55.7                | 0.91                   | 0.02  | Not required        |
| 34 cube 0        | WLAN 2.4GHz Band |                | 0.014         | -           | 0.0237                | -0.315 | -0.173 |                     |                        |       |                     |
| 5                | CDMA2000 BC0     |                | 0.896         | -           | 0.0635                | -0.276 | -0.174 | 33.3                | 0.91                   | 0.03  | Not required        |
| 34 cube 1        | WLAN 2.4GHz Band |                | 0.012         | -           | 0.0386                | -0.254 | -0.172 |                     |                        |       |                     |
| 20               | LTE Band 25      |                | 0.853         | -           | 0.0436                | -0.33  | -0.173 | 24.9                | 0.87                   | 0.03  | Not required        |
| 34 cube 0        | WLAN 2.4GHz Band |                | 0.014         | -           | 0.0237                | -0.315 | -0.173 |                     |                        |       |                     |
| 20               | LTE Band 25      |                | 0.853         | -           | 0.0436                | -0.33  | -0.173 |                     |                        |       |                     |
| 34 cube 1        | WLAN 2.4GHz Band |                | 0.012         | -           | 0.0386                | -0.254 | -0.172 | 76.2                | 0.87                   | 0.01  | Not required        |

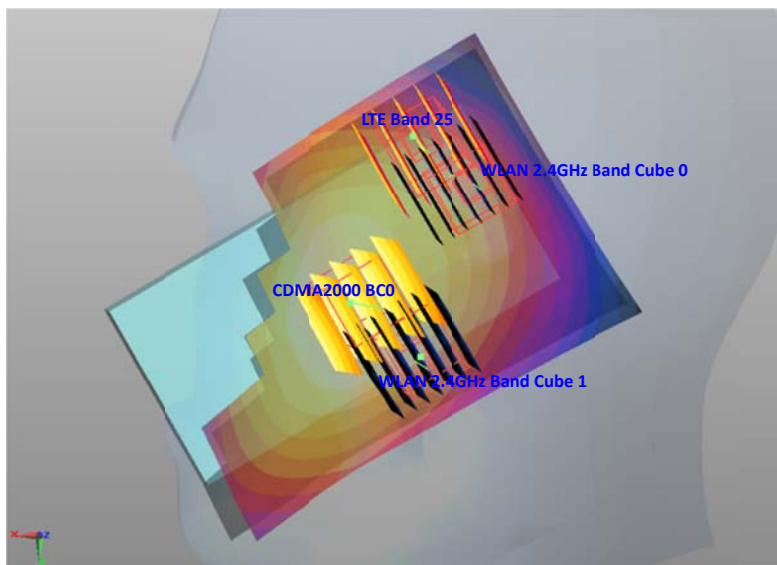

| Case No<br>#A1-2 | Band             | Position       | SAR<br>(W/kg) | Gap<br>(cm) | SAR peak location (m) |        |        | 3D distance<br>(mm) | Pair SAR sum<br>(W/kg) | SPLSR | Simultaneous<br>SAR |
|------------------|------------------|----------------|---------------|-------------|-----------------------|--------|--------|---------------------|------------------------|-------|---------------------|
| Plot No          |                  |                |               |             | X                     | Y      | Z      |                     |                        |       |                     |
| 13               | CDMA2000 BC10    | Right<br>Check | 0.854         | -           | 0.0648                | -0.275 | -0.174 | 59.0                | 1.71                   | 0.04  | Not required        |
| 20               | LTE Band 25      |                | 0.853         | -           | 0.0436                | -0.33  | -0.173 |                     |                        |       |                     |
| 13               | CDMA2000 BC10    |                | 0.854         | -           | 0.0648                | -0.275 | -0.174 | 57.4                | 0.87                   | 0.01  | Not required        |
| 34 cube 0        | WLAN 2.4GHz Band |                | 0.014         | -           | 0.0237                | -0.315 | -0.173 |                     |                        |       |                     |
| 13               | CDMA2000 BC10    |                | 0.854         | -           | 0.0648                | -0.275 | -0.174 | 33.6                | 0.87                   | 0.02  | Not required        |
| 34 cube 1        | WLAN 2.4GHz Band |                | 0.012         | -           | 0.0386                | -0.254 | -0.172 |                     |                        |       |                     |
| 20               | LTE Band 25      |                | 0.853         | -           | 0.0436                | -0.33  | -0.173 | 24.9                | 0.87                   | 0.03  | Not required        |
| 34 cube 0        | WLAN 2.4GHz Band |                | 0.014         | -           | 0.0237                | -0.315 | -0.173 |                     |                        |       |                     |
| 20               | LTE Band 25      |                | 0.853         | -           | 0.0436                | -0.33  | -0.173 |                     |                        |       |                     |
| 34 cube 1        | WLAN 2.4GHz Band |                | 0.012         | -           | 0.0386                | -0.254 | -0.172 | 76.2                | 0.87                   | 0.01  | Not required        |

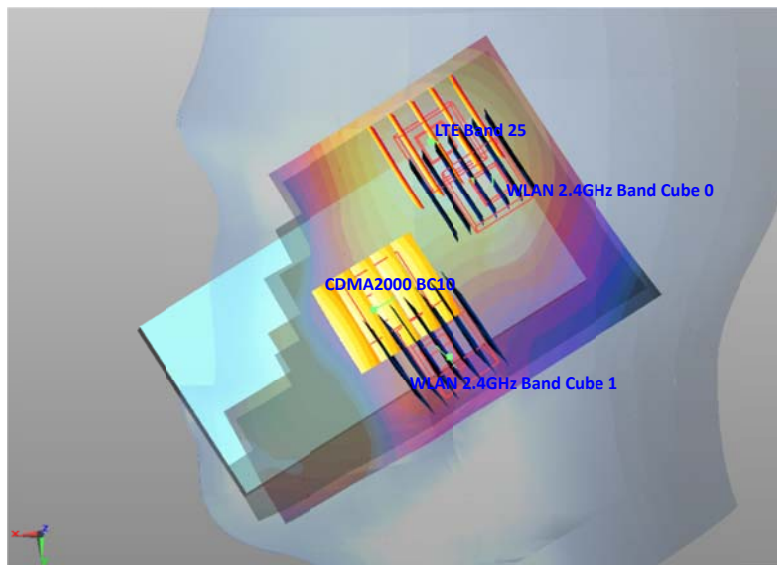


| Case No<br>#A1-3 | Band         | Position       | SAR<br>(W/kg) | Gap<br>(cm) | SAR peak location (m) |        |        | 3D distance<br>(mm) | Pair SAR sum<br>(W/kg) | SPLSR | Simultaneous<br>SAR |
|------------------|--------------|----------------|---------------|-------------|-----------------------|--------|--------|---------------------|------------------------|-------|---------------------|
| Plot No          |              |                |               |             | X                     | Y      | Z      |                     |                        |       |                     |
| 5                | CDMA2000 BC0 | Right<br>Check | 0.896         | -           | 0.0635                | -0.276 | -0.174 | 57.6                | 1.75                   | 0.04  | Not required        |
| 20               | LTE Band 25  |                | 0.853         | -           | 0.0436                | -0.33  | -0.173 |                     |                        |       |                     |
| 5                | CDMA2000 BC0 |                | 0.896         | -           | 0.0635                | -0.276 | -0.174 | 55.7                | 0.95                   | 0.02  | Not required        |
| Bluetooth cube 0 | Bluetooth    |                | 0.053         | -           | 0.0237                | -0.315 | -0.173 |                     |                        |       |                     |
| 5                | CDMA2000 BC0 |                | 0.896         | -           | 0.0635                | -0.276 | -0.174 | 33.3                | 0.95                   | 0.03  | Not required        |
| Bluetooth cube 1 | Bluetooth    |                | 0.053         | -           | 0.0386                | -0.254 | -0.172 |                     |                        |       |                     |
| 20               | LTE Band 25  |                | 0.853         | -           | 0.0436                | -0.33  | -0.173 | 24.9                | 0.91                   | 0.03  | Not required        |
| Bluetooth cube 0 | Bluetooth    |                | 0.053         | -           | 0.0237                | -0.315 | -0.173 |                     |                        |       |                     |
| 20               | LTE Band 25  |                | 0.853         | -           | 0.0436                | -0.33  | -0.173 | 76.2                | 0.91                   | 0.01  | Not required        |
| Bluetooth cube 1 | Bluetooth    |                | 0.053         | -           | 0.0386                | -0.254 | -0.172 |                     |                        |       |                     |

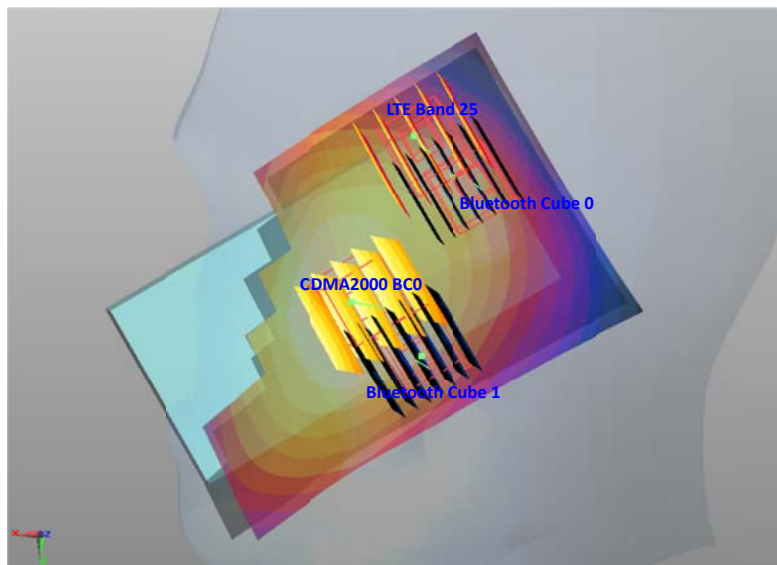





| Case No<br>#A1-4 | Band          | Position       | SAR<br>(W/kg) | Gap<br>(cm) | SAR peak location (m) |        |        | 3D distance<br>(mm) | Pair SAR sum<br>(W/kg) | SPLSR | Simultaneous<br>SAR |
|------------------|---------------|----------------|---------------|-------------|-----------------------|--------|--------|---------------------|------------------------|-------|---------------------|
| Plot No          |               |                |               |             | X                     | Y      | Z      |                     |                        |       |                     |
| 13               | CDMA2000 BC10 | Right<br>Check | 0.854         | -           | 0.0648                | -0.275 | -0.174 | 59.0                | 1.71                   | 0.04  | Not required        |
| 20               | LTE Band 25   |                | 0.853         | -           | 0.0436                | -0.33  | -0.173 |                     |                        |       |                     |
| 13               | CDMA2000 BC10 |                | 0.854         | -           | 0.0648                | -0.275 | -0.174 | 57.4                | 0.91                   | 0.02  | Not required        |
| Bluetooth cube 0 | Bluetooth     |                | 0.053         | -           | 0.0237                | -0.315 | -0.173 |                     |                        |       |                     |
| 13               | CDMA2000 BC10 |                | 0.854         | -           | 0.0648                | -0.275 | -0.174 | 33.6                | 0.91                   | 0.03  | Not required        |
| Bluetooth cube 1 | Bluetooth     |                | 0.053         | -           | 0.0386                | -0.254 | -0.172 |                     |                        |       |                     |
| 20               | LTE Band 25   |                | 0.853         | -           | 0.0436                | -0.33  | -0.173 | 24.9                | 0.91                   | 0.03  | Not required        |
| Bluetooth cube 0 | Bluetooth     |                | 0.053         | -           | 0.0237                | -0.315 | -0.173 |                     |                        |       |                     |
| 20               | LTE Band 25   |                | 0.853         | -           | 0.0436                | -0.33  | -0.173 | 76.2                | 0.91                   | 0.01  | Not required        |
| Bluetooth cube 1 | Bluetooth     |                | 0.053         | -           | 0.0386                | -0.254 | -0.172 |                     |                        |       |                     |

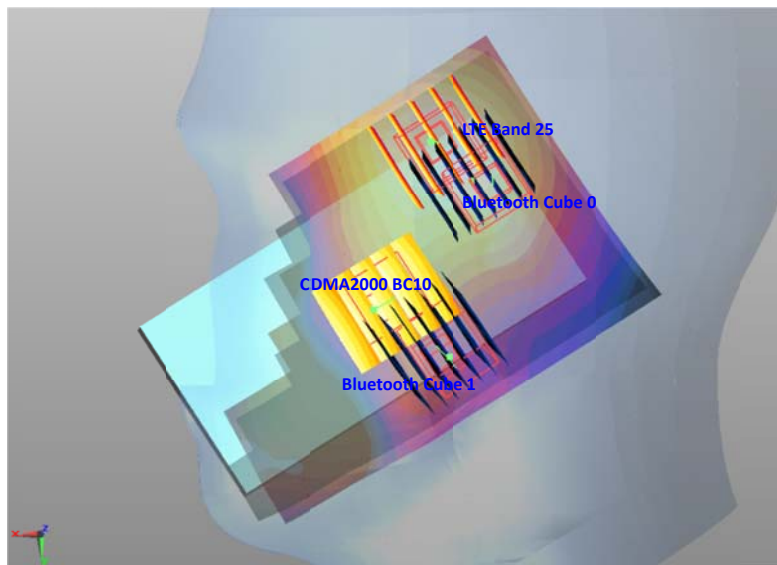


| Case No<br>#C1-1 | Band             | Position | SAR<br>(W/kg) | Gap<br>(cm) | SAR peak location (m) |         |        | 3D distance<br>(mm) | Pair SAR sum<br>(W/kg) | SPLSR | Simultaneous<br>SAR |
|------------------|------------------|----------|---------------|-------------|-----------------------|---------|--------|---------------------|------------------------|-------|---------------------|
| Plot No          |                  |          |               |             | X                     | Y       | Z      |                     |                        |       |                     |
| 58 cube 0        | CDMA2000 BC0     | Back     | 0.680         | 1           | -0.035                | 0.0075  | -0.206 | 53.2                | 1.75                   | 0.04  | Not required        |
| 108 cube 0       | LTE Band 25      |          | 1.065         | 1           | 0.0055                | 0.042   | -0.205 |                     |                        |       |                     |
| 58 cube 0        | CDMA2000 BC0     |          | 0.680         | 1           | -0.035                | 0.0075  | -0.206 | 42.0                | 1.40                   | 0.04  | Not required        |
| 108 cube 1       | LTE Band 25      |          | 0.721         | 1           | -0.0365               | 0.0495  | -0.205 |                     |                        |       |                     |
| 58 cube 1        | CDMA2000 BC0     |          | 0.546         | 1           | -0.0125               | -0.0575 | -0.205 | 101.1               | 1.61                   | 0.02  | Not required        |
| 108 cube 0       | LTE Band 25      |          | 1.065         | 1           | 0.0055                | 0.042   | -0.205 |                     |                        |       |                     |
| 58 cube 1        | CDMA2000 BC0     |          | 0.546         | 1           | -0.0125               | -0.0575 | -0.205 | 109.7               | 1.27                   | 0.01  | Not required        |
| 108 cube 1       | LTE Band 25      |          | 0.721         | 1           | -0.0365               | 0.0495  | -0.205 |                     |                        |       |                     |
| 58 cube 0        | CDMA2000 BC0     |          | 0.680         | 1           | -0.035                | 0.0075  | -0.206 | 7.7                 | 0.70                   | 0.08  | Step 2              |
| 129              | WLAN 2.4GHz Band |          | 0.023         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |
| 58 cube 1        | CDMA2000 BC0     |          | 0.546         | 1           | -0.0125               | -0.0575 | -0.205 | 76.0                | 0.57                   | 0.01  | Not required        |
| 129              | WLAN 2.4GHz Band |          | 0.023         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |
| 108 cube 0       | LTE Band 25      |          | 1.065         | 1           | 0.0055                | 0.042   | -0.205 | 53.6                | 1.09                   | 0.02  | Not required        |
| 129              | WLAN 2.4GHz Band |          | 0.023         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |
| 108 cube 1       | LTE Band 25      |          | 0.721         | 1           | -0.0365               | 0.0495  | -0.205 | 36.3                | 0.74                   | 0.02  | Not required        |
| 129              | WLAN 2.4GHz Band |          | 0.023         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |

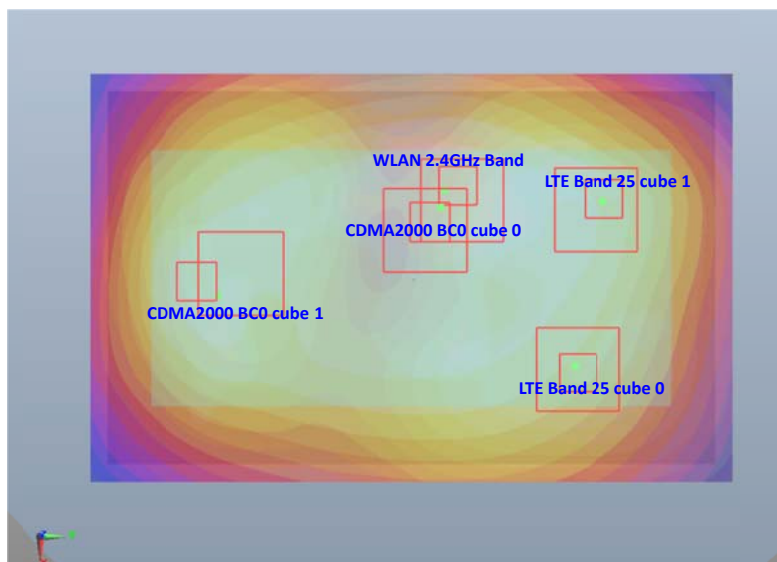


| Case No<br>#C1-2 | Band             | Position | SAR<br>(W/kg) | Gap<br>(cm) | SAR peak location (m) |         |        | 3D distance<br>(mm) | Pair SAR sum<br>(W/kg) | SPLSR | Simultaneous<br>SAR |
|------------------|------------------|----------|---------------|-------------|-----------------------|---------|--------|---------------------|------------------------|-------|---------------------|
| Plot No          |                  |          |               |             | X                     | Y       | Z      |                     |                        |       |                     |
| 78 cube 0        | CDMA2000 BC1     | Back     | 1.425         | 1           | -0.0215               | -0.0645 | -0.205 | 109.9               | 2.49                   | 0.04  | Not required        |
| 108 cube 0       | LTE Band 25      |          | 1.065         | 1           | 0.0055                | 0.042   | -0.205 |                     |                        |       |                     |
| 78 cube 0        | CDMA2000 BC1     |          | 1.425         | 1           | -0.0215               | -0.0645 | -0.205 | 115.0               | 2.15                   | 0.03  | Not required        |
| 108 cube 1       | LTE Band 25      |          | 0.721         | 1           | -0.0365               | 0.0495  | -0.205 |                     |                        |       |                     |
| 78 cube 1        | CDMA2000 BC1     |          | 1.209         | 1           | 0.004                 | -0.042  | -0.205 | 84.0                | 2.27                   | 0.04  | Not required        |
| 108 cube 0       | LTE Band 25      |          | 1.065         | 1           | 0.0055                | 0.042   | -0.205 |                     |                        |       |                     |
| 78 cube 1        | CDMA2000 BC1     |          | 1.209         | 1           | 0.004                 | -0.042  | -0.205 | 100.1               | 1.93                   | 0.03  | Not required        |
| 108 cube 1       | LTE Band 25      |          | 0.721         | 1           | -0.0365               | 0.0495  | -0.205 |                     |                        |       |                     |
| 78 cube 0        | CDMA2000 BC1     |          | 1.425         | 1           | -0.0215               | -0.0645 | -0.205 | 80.0                | 1.45                   | 0.02  | Not required        |
| 129              | WLAN 2.4GHz Band |          | 0.023         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |
| 78 cube 1        | CDMA2000 BC1     |          | 1.209         | 1           | 0.004                 | -0.042  | -0.205 | 70.6                | 1.23                   | 0.02  | Not required        |
| 129              | WLAN 2.4GHz Band |          | 0.023         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |
| 180 cube 0       | LTE Band 25      |          | 1.065         | 1           | 0.0055                | 0.042   | -0.205 | 53.6                | 1.09                   | 0.02  | Not required        |
| 129              | WLAN 2.4GHz Band |          | 0.023         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |
| 108 cube 1       | LTE Band 25      |          | 0.721         | 1           | -0.0365               | 0.0495  | -0.205 | 36.3                | 0.74                   | 0.02  | Not required        |
| 129              | WLAN 2.4GHz Band |          | 0.023         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |

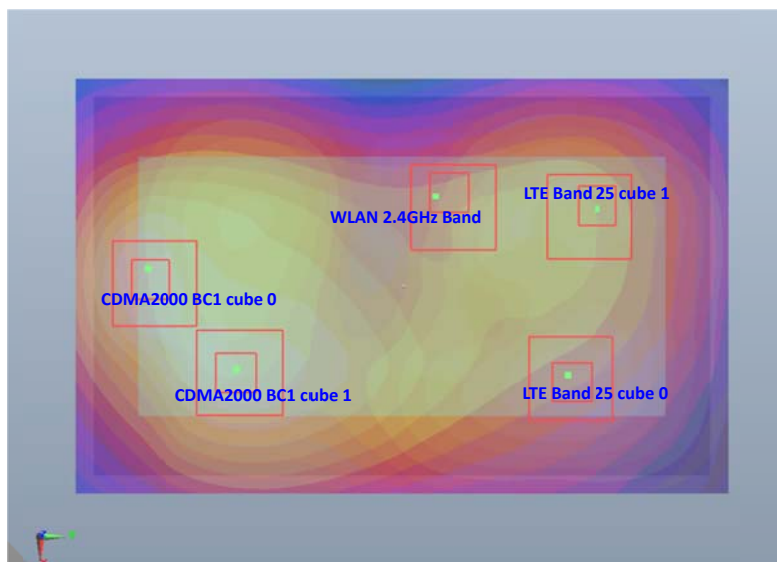


| Case No<br>#C1-3 | Band             | Position | SAR<br>(W/kg) | Gap<br>(cm) | SAR peak location (m) |         |        | 3D distance<br>(mm) | Pair SAR sum<br>(W/kg) | SPLSR | Simultaneous<br>SAR |
|------------------|------------------|----------|---------------|-------------|-----------------------|---------|--------|---------------------|------------------------|-------|---------------------|
| Plot No          |                  |          |               |             | X                     | Y       | Z      |                     |                        |       |                     |
| 99 cube 0        | CDMA2000 BC10    | Back     | 0.937         | 1           | -0.023                | -0.0045 | -0.206 | 54.5                | 2.00                   | 0.05  | <b>Step 2</b>       |
| 108 cube 0       | LTE Band 25      |          | 1.065         | 1           | 0.0055                | 0.042   | -0.205 |                     |                        |       |                     |
| 99 cube 0        | CDMA2000 BC10    |          | 0.937         | 1           | -0.023                | -0.0045 | -0.206 | 55.7                | 1.66                   | 0.04  | Not required        |
| 108 cube 1       | LTE Band 25      |          | 0.721         | 1           | -0.0365               | 0.0495  | -0.205 |                     |                        |       |                     |
| 99 cube 1        | CDMA2000 BC10    |          | 0.672         | 1           | -0.0295               | -0.032  | -0.206 | 81.9                | 1.74                   | 0.03  | Not required        |
| 108 cube 0       | LTE Band 25      |          | 1.065         | 1           | 0.0055                | 0.042   | -0.205 |                     |                        |       |                     |
| 99 cube 1        | CDMA2000 BC10    |          | 0.672         | 1           | -0.0295               | -0.032  | -0.206 | 81.8                | 1.39                   | 0.02  | Not required        |
| 108 cube 1       | LTE Band 25      |          | 0.721         | 1           | -0.0365               | 0.0495  | -0.205 |                     |                        |       |                     |
| 99 cube 0        | CDMA2000 BC10    |          | 0.937         | 1           | -0.023                | -0.0045 | -0.206 | 24.6                | 0.96                   | 0.04  | Not required        |
| 129              | WLAN 2.4GHz Band |          | 0.023         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |
| 99 cube 1        | CDMA2000 BC10    |          | 0.672         | 1           | -0.0295               | -0.032  | -0.206 | 46.6                | 0.70                   | 0.01  | Not required        |
| 129              | WLAN 2.4GHz Band |          | 0.023         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |
| 108 cube 0       | LTE Band 25      |          | 1.065         | 1           | 0.0055                | 0.042   | -0.205 | 53.6                | 1.09                   | 0.02  | Not required        |
| 129              | WLAN 2.4GHz Band |          | 0.023         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |
| 108 cube 1       | LTE Band 25      |          | 0.721         | 1           | -0.0365               | 0.0495  | -0.205 | 36.3                | 0.74                   | 0.02  | Not required        |
| 129              | WLAN 2.4GHz Band |          | 0.023         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |

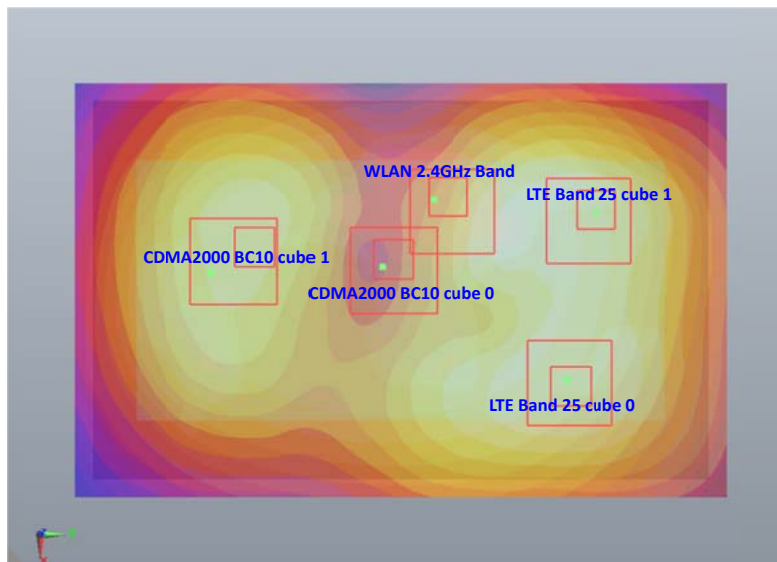


| Case No<br>#C1-4 | Band             | Position                  | SAR<br>(W/kg) | Gap<br>(cm) | SAR peak location (m) |         |        | 3D distance<br>(mm) | Pair SAR sum<br>(W/kg) | SPLSR | Simultaneous<br>SAR |
|------------------|------------------|---------------------------|---------------|-------------|-----------------------|---------|--------|---------------------|------------------------|-------|---------------------|
| Plot No          |                  |                           |               |             | X                     | Y       | Z      |                     |                        |       |                     |
| 81 cube 0        | CDMA2000 BC1     | Back<br>(with<br>headset) | 1.437         | 1           | -0.023                | -0.066  | -0.205 | 112.8               | 2.43                   | 0.03  | Not required        |
| 117              | LTE Band 25      |                           | 0.995         | 1           | 0.004                 | 0.0435  | -0.205 |                     |                        |       |                     |
| 81 cube 1        | CDMA2000 BC1     |                           | 1.163         | 1           | -0.0135               | -0.0625 | -0.205 | 107.4               | 2.16                   | 0.03  | Not required        |
| 117              | LTE Band 25      |                           | 0.995         | 1           | 0.004                 | 0.0435  | -0.205 |                     |                        |       |                     |
| 81 cube 0        | CDMA2000 BC1     |                           | 1.437         | 1           | -0.023                | -0.066  | -0.205 | 81.2                | 1.46                   | 0.02  | Not required        |
| 131              | WLAN 2.4GHz Band |                           | 0.025         | 1           | -0.041                | 0.0132  | -0.205 |                     |                        |       |                     |
| 81 cube 1        | CDMA2000 BC1     |                           | 1.163         | 1           | -0.0135               | -0.0625 | -0.205 | 80.5                | 1.19                   | 0.02  | Not required        |
| 131              | WLAN 2.4GHz Band |                           | 0.025         | 1           | -0.041                | 0.0132  | -0.205 |                     |                        |       |                     |
| 117              | LTE Band 25      |                           | 0.995         | 1           | 0.004                 | 0.0435  | -0.205 | 54.3                | 1.02                   | 0.02  | Not required        |
| 131              | WLAN 2.4GHz Band |                           | 0.025         | 1           | -0.041                | 0.0132  | -0.205 |                     |                        |       |                     |

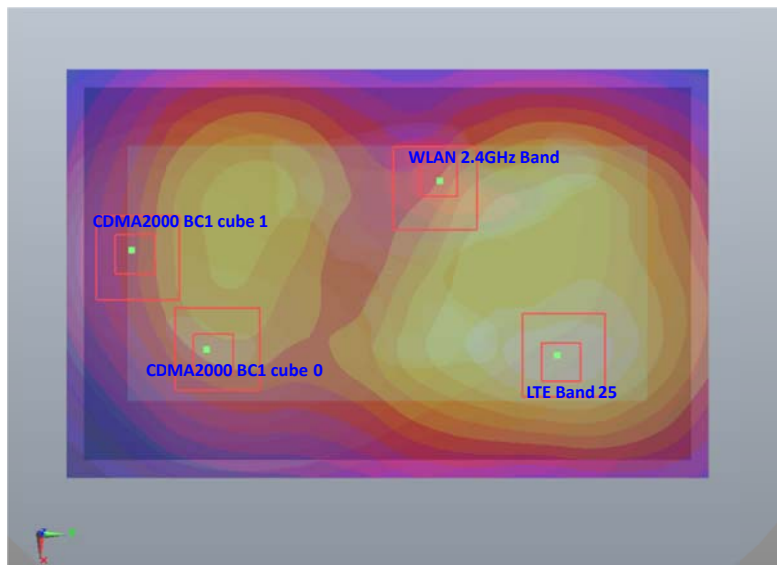

| Case No<br>#C1-5 | Band         | Position | SAR<br>(W/kg) | Gap<br>(cm) | SAR peak location (m) |         |        | 3D distance<br>(mm) | Pair SAR sum<br>(W/kg) | SPLSR | Simultaneous<br>SAR |
|------------------|--------------|----------|---------------|-------------|-----------------------|---------|--------|---------------------|------------------------|-------|---------------------|
| Plot No          |              |          |               |             | X                     | Y       | Z      |                     |                        |       |                     |
| 58 cube 0        | CDMA2000 BC0 | Back     | 0.680         | 1           | -0.035                | 0.0075  | -0.206 | 53.2                | 1.75                   | 0.04  | Not required        |
| 108 cube 0       | LTE Band 25  |          | 1.065         | 1           | 0.0055                | 0.042   | -0.205 |                     |                        |       |                     |
| 58 cube 0        | CDMA2000 BC0 |          | 0.680         | 1           | -0.035                | 0.0075  | -0.206 | 42.0                | 1.40                   | 0.04  | Not required        |
| 108 cube 1       | LTE Band 25  |          | 0.721         | 1           | -0.0365               | 0.0495  | -0.205 |                     |                        |       |                     |
| 58 cube 1        | CDMA2000 BC0 |          | 0.546         | 1           | -0.0125               | -0.0575 | -0.205 | 101.1               | 1.61                   | 0.02  | Not required        |
| 108 cube 0       | LTE Band 25  |          | 1.065         | 1           | 0.0055                | 0.042   | -0.205 |                     |                        |       |                     |
| 58 cube 1        | CDMA2000 BC0 |          | 0.546         | 1           | -0.0125               | -0.0575 | -0.205 | 109.7               | 1.27                   | 0.01  | Not required        |
| 108 cube 1       | LTE Band 25  |          | 0.721         | 1           | -0.0365               | 0.0495  | -0.205 |                     |                        |       |                     |
| 58 cube 0        | CDMA2000 BC0 |          | 0.680         | 1           | -0.035                | 0.0075  | -0.206 | 7.7                 | 0.71                   | 0.08  | Step 2              |
| Bluetooth        |              |          | 0.026         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |
| 58 cube 1        | CDMA2000 BC0 |          | 0.546         | 1           | -0.0125               | -0.0575 | -0.205 | 76.0                | 0.57                   | 0.01  | Not required        |
| Bluetooth        | Bluetooth    |          | 0.026         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |
| 108 cube 0       | LTE Band 25  |          | 1.065         | 1           | 0.0055                | 0.042   | -0.205 | 53.6                | 1.09                   | 0.02  | Not required        |
| Bluetooth        |              |          | 0.026         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |
| 108 cube 1       | LTE Band 25  |          | 0.721         | 1           | -0.0365               | 0.0495  | -0.205 | 36.3                | 0.75                   | 0.02  | Not required        |
| Bluetooth        |              |          | 0.026         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |

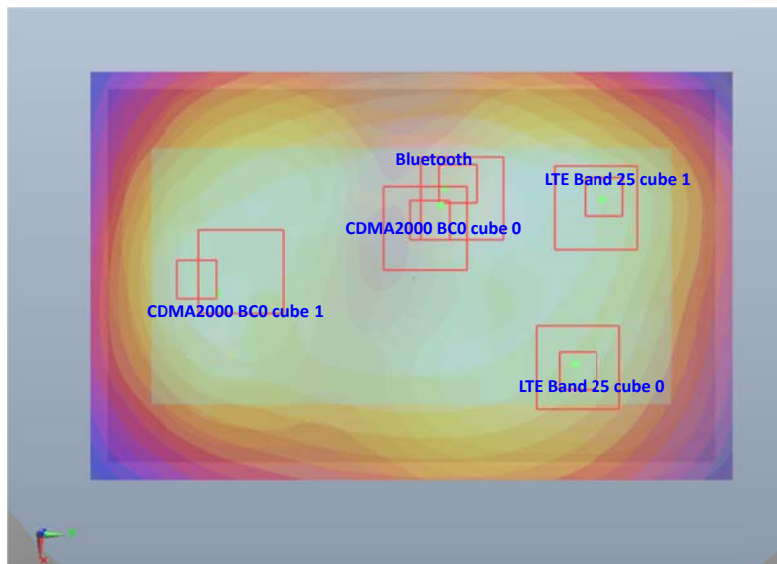


| Case No<br>#C1-6 | Band         | Position | SAR<br>(W/kg) | Gap<br>(cm) | SAR peak location (m) |         |        | 3D distance<br>(mm) | Pair SAR sum<br>(W/kg) | SPLSR | Simultaneous<br>SAR |
|------------------|--------------|----------|---------------|-------------|-----------------------|---------|--------|---------------------|------------------------|-------|---------------------|
| Plot No          |              |          |               |             | X                     | Y       | Z      |                     |                        |       |                     |
| 78 cube 0        | CDMA2000 BC1 | Back     | 1.425         | 1           | -0.0215               | -0.0645 | -0.205 | 109.9               | 2.49                   | 0.04  | Not required        |
| 108 cube 0       | LTE Band 25  |          | 1.065         | 1           | 0.0055                | 0.042   | -0.205 |                     |                        |       |                     |
| 78 cube 0        | CDMA2000 BC1 |          | 1.425         | 1           | -0.0215               | -0.0645 | -0.205 | 115.0               | 2.15                   | 0.03  | Not required        |
| 108 cube 1       | LTE Band 25  |          | 0.721         | 1           | -0.0365               | 0.0495  | -0.205 |                     |                        |       |                     |
| 78 cube 1        | CDMA2000 BC1 |          | 1.209         | 1           | 0.004                 | -0.042  | -0.205 | 84.0                | 2.27                   | 0.04  | Not required        |
| 108 cube 0       | LTE Band 25  |          | 1.065         | 1           | 0.0055                | 0.042   | -0.205 |                     |                        |       |                     |
| 78 cube 1        | CDMA2000 BC1 |          | 1.209         | 1           | 0.004                 | -0.042  | -0.205 | 100.1               | 1.93                   | 0.03  | Not required        |
| 108 cube 1       | LTE Band 25  |          | 0.721         | 1           | -0.0365               | 0.0495  | -0.205 |                     |                        |       |                     |
| 78 cube 0        | CDMA2000 BC1 |          | 1.425         | 1           | -0.0215               | -0.0645 | -0.205 | 80.0                | 1.45                   | 0.02  | Not required        |
| Bluetooth        |              |          | 0.026         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |
| 78 cube 1        | CDMA2000 BC1 |          | 1.209         | 1           | 0.004                 | -0.042  | -0.205 | 70.6                | 1.24                   | 0.02  | Not required        |
| Bluetooth        |              |          | 0.026         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |
| 108 cube 0       | LTE Band 25  |          | 1.065         | 1           | 0.0055                | 0.042   | -0.205 | 53.6                | 1.09                   | 0.02  | Not required        |
| Bluetooth        | Bluetooth    |          | 0.026         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |
| 108 cube 1       | LTE Band 25  |          | 0.721         | 1           | -0.0365               | 0.0495  | -0.205 | 36.3                | 0.75                   | 0.02  | Not required        |
| Bluetooth        |              |          | 0.026         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |

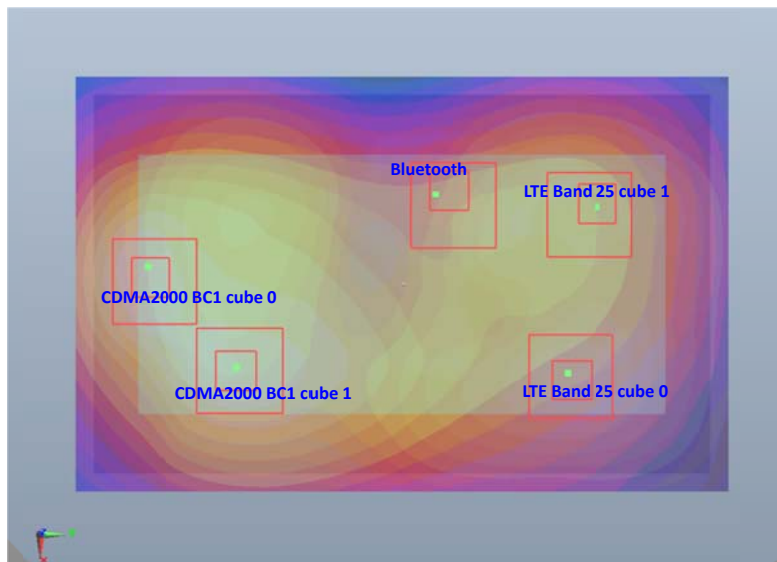




| Case No<br>#C1-7 | Band          | Position | SAR<br>(W/kg) | Gap<br>(cm) | SAR peak location (m) |         |        | 3D distance<br>(mm) | Pair SAR sum<br>(W/kg) | SPLSR | Simultaneous<br>SAR |
|------------------|---------------|----------|---------------|-------------|-----------------------|---------|--------|---------------------|------------------------|-------|---------------------|
| Plot No          |               |          |               |             | X                     | Y       | Z      |                     |                        |       |                     |
| 99 cube 0        | CDMA2000 BC10 | Back     | 0.937         | 1           | -0.023                | -0.0045 | -0.206 | 54.5                | 2.00                   | 0.05  | <b>Step 2</b>       |
| 108 cube 0       | LTE Band 25   |          | 1.065         | 1           | 0.0055                | 0.042   | -0.205 |                     |                        |       |                     |
| 99 cube 0        | CDMA2000 BC10 |          | 0.937         | 1           | -0.023                | -0.0045 | -0.206 | 55.7                | 1.66                   | 0.04  | Not required        |
| 108 cube 1       | LTE Band 25   |          | 0.721         | 1           | -0.0365               | 0.0495  | -0.205 |                     |                        |       |                     |
| 99 cube 1        | CDMA2000 BC10 |          | 0.672         | 1           | -0.0295               | -0.032  | -0.206 | 81.9                | 1.74                   | 0.03  | Not required        |
| 108 cube 0       | LTE Band 25   |          | 1.065         | 1           | 0.0055                | 0.042   | -0.205 |                     |                        |       |                     |
| 99 cube 1        | CDMA2000 BC10 |          | 0.672         | 1           | -0.0295               | -0.032  | -0.206 | 81.8                | 1.39                   | 0.02  | Not required        |
| 108 cube 1       | LTE Band 25   |          | 0.721         | 1           | -0.0365               | 0.0495  | -0.205 |                     |                        |       |                     |
| 99 cube 0        | CDMA2000 BC10 |          | 0.937         | 1           | -0.023                | -0.0045 | -0.206 | 24.6                | 0.96                   | 0.04  | Not required        |
| Bluetooth        |               |          | 0.026         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |
| 99 cube 1        | CDMA2000 BC10 |          | 0.672         | 1           | -0.0295               | -0.032  | -0.206 | 46.6                | 0.70                   | 0.01  | Not required        |
| Bluetooth        |               |          | 0.026         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |
| 108 cube 0       | LTE Band 25   |          | 1.065         | 1           | 0.0055                | 0.042   | -0.205 | 53.6                | 1.09                   | 0.02  | Not required        |
| Bluetooth        |               |          | 0.026         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |
| 108 cube 1       | LTE Band 25   |          | 0.721         | 1           | -0.0365               | 0.0495  | -0.205 | 36.3                | 0.75                   | 0.02  | Not required        |
| Bluetooth        |               |          | 0.026         | 1           | -0.0398               | 0.0134  | -0.205 |                     |                        |       |                     |

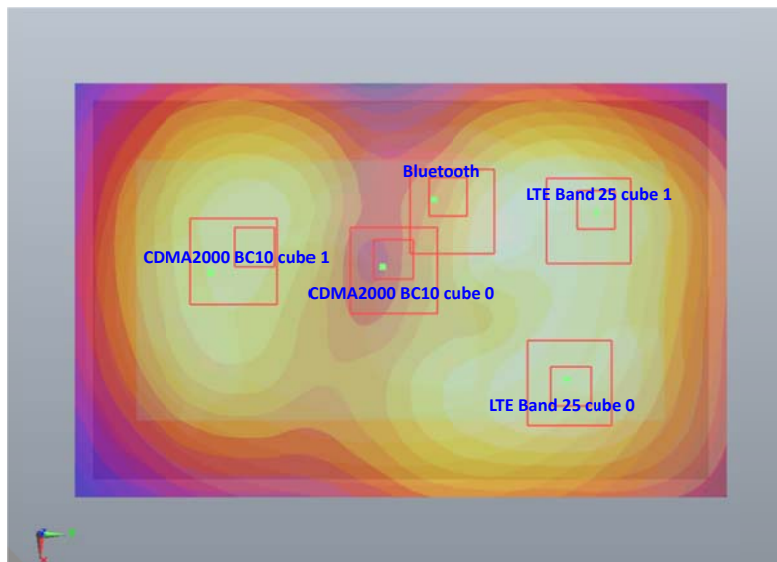

| Case No<br>#C1-8 | Band         | Position             | SAR<br>(W/kg) | Gap<br>(cm) | SAR peak location (m) |         |        | 3D distance<br>(mm) | Pair SAR sum<br>(W/kg) | SPLSR | Simultaneous<br>SAR |
|------------------|--------------|----------------------|---------------|-------------|-----------------------|---------|--------|---------------------|------------------------|-------|---------------------|
| Plot No          |              |                      |               |             | X                     | Y       | Z      |                     |                        |       |                     |
| 81 cube 0        | CDMA2000 BC1 | Back<br>(w/ headset) | 1.437         | 1           | -0.023                | -0.066  | -0.205 | 112.8               | 2.43                   | 0.03  | Not required        |
| 117              | LTE Band 25  |                      | 0.995         | 1           | 0.004                 | 0.0435  | -0.205 |                     |                        |       |                     |
| 81 cube 1        | CDMA2000 BC1 |                      | 1.163         | 1           | -0.0135               | -0.0625 | -0.205 | 107.4               | 2.16                   | 0.03  | Not required        |
| 117              | LTE Band 25  |                      | 0.995         | 1           | 0.004                 | 0.0435  | -0.205 |                     |                        |       |                     |
| 81 cube 0        | CDMA2000 BC1 |                      | 1.437         | 1           | -0.023                | -0.066  | -0.205 | 81.2                | 1.46                   | 0.02  | Not required        |
| Bluetooth        |              |                      | 0.026         | 1           | -0.041                | 0.0132  | -0.205 |                     |                        |       |                     |
| 81 cube 1        | CDMA2000 BC1 |                      | 1.163         | 1           | -0.0135               | -0.0625 | -0.205 | 80.5                | 1.19                   | 0.02  | Not required        |
| Bluetooth        |              |                      | 0.026         | 1           | -0.041                | 0.0132  | -0.205 |                     |                        |       |                     |
| 117              | LTE Band 25  |                      | 0.995         | 1           | 0.004                 | 0.0435  | -0.205 | 54.3                | 1.02                   | 0.02  | Not required        |
| Bluetooth        |              |                      | 0.026         | 1           | -0.041                | 0.0132  | -0.205 |                     |                        |       |                     |

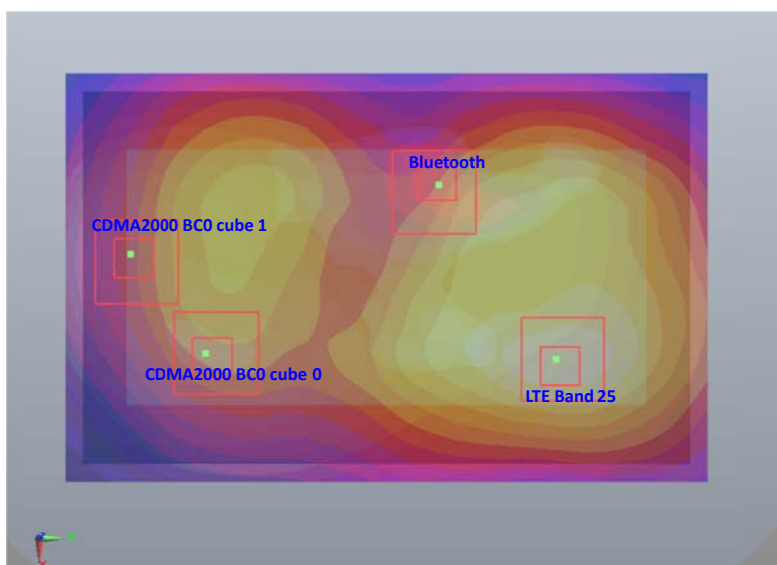

**Test Engineer :** Fulu Hu

### 13. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 12.1

| Uncertainty Distributions          | Normal      | Rectangular  | Triangular   | U-Shape      |
|------------------------------------|-------------|--------------|--------------|--------------|
| Multi-plying Factor <sup>(a)</sup> | $1/k^{(b)}$ | $1/\sqrt{3}$ | $1/\sqrt{6}$ | $1/\sqrt{2}$ |

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $k$  is the coverage factor

**Table 13.1 Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

| Error Description             | Uncertainty | Probability  | Divisor | Ci   | Ci    | Standard    | Standard    |
|-------------------------------|-------------|--------------|---------|------|-------|-------------|-------------|
|                               | Value       | Distribution |         | (1g) | (10g) | Uncertainty | Uncertainty |
|                               | (±%)        |              |         |      |       | (1g)        | (10g)       |
| Measurement System            |             |              |         |      |       |             |             |
| Probe Calibration             | 6.0         | Normal       | 1       | 1    | 1     | ± 6.0 %     | ± 6.0 %     |
| Axial Isotropy                | 4.7         | Rectangular  | √3      | 0.7  | 0.7   | ± 1.9 %     | ± 1.9 %     |
| Hemispherical Isotropy        | 9.6         | Rectangular  | √3      | 0.7  | 0.7   | ± 3.9 %     | ± 3.9 %     |
| Boundary Effects              | 1.0         | Rectangular  | √3      | 1    | 1     | ± 0.6 %     | ± 0.6 %     |
| Linearity                     | 4.7         | Rectangular  | √3      | 1    | 1     | ± 2.7 %     | ± 2.7 %     |
| System Detection Limits       | 1.0         | Rectangular  | √3      | 1    | 1     | ± 0.6 %     | ± 0.6 %     |
| Readout Electronics           | 0.3         | Normal       | 1       | 1    | 1     | ± 0.3 %     | ± 0.3 %     |
| Response Time                 | 0.8         | Rectangular  | √3      | 1    | 1     | ± 0.5 %     | ± 0.5 %     |
| Integration Time              | 2.6         | Rectangular  | √3      | 1    | 1     | ± 1.5 %     | ± 1.5 %     |
| RF Ambient Noise              | 3.0         | Rectangular  | √3      | 1    | 1     | ± 1.7 %     | ± 1.7 %     |
| RF Ambient Reflections        | 3.0         | Rectangular  | √3      | 1    | 1     | ± 1.7 %     | ± 1.7 %     |
| Probe Positioner              | 0.4         | Rectangular  | √3      | 1    | 1     | ± 0.2 %     | ± 0.2 %     |
| Probe Positioning             | 2.9         | Rectangular  | √3      | 1    | 1     | ± 1.7 %     | ± 1.7 %     |
| Max. SAR Eval.                | 1.0         | Rectangular  | √3      | 1    | 1     | ± 0.6 %     | ± 0.6 %     |
| Test Sample Related           |             |              |         |      |       |             |             |
| Device Positioning            | 2.9         | Normal       | 1       | 1    | 1     | ± 2.9 %     | ± 2.9 %     |
| Device Holder                 | 3.6         | Normal       | 1       | 1    | 1     | ± 3.6 %     | ± 3.6 %     |
| Power Drift                   | 5.0         | Rectangular  | √3      | 1    | 1     | ± 2.9 %     | ± 2.9 %     |
| Phantom and Setup             |             |              |         |      |       |             |             |
| Phantom Uncertainty           | 4.0         | Rectangular  | √3      | 1    | 1     | ± 2.3 %     | ± 2.3 %     |
| Liquid Conductivity (Target)  | 5.0         | Rectangular  | √3      | 0.64 | 0.43  | ± 1.8 %     | ± 1.2 %     |
| Liquid Conductivity (Meas.)   | 2.5         | Normal       | 1       | 0.64 | 0.43  | ± 1.6 %     | ± 1.1 %     |
| Liquid Permittivity (Target)  | 5.0         | Rectangular  | √3      | 0.6  | 0.49  | ± 1.7 %     | ± 1.4 %     |
| Liquid Permittivity (Meas.)   | 2.5         | Normal       | 1       | 0.6  | 0.49  | ± 1.5 %     | ± 1.2 %     |
| Combined Standard Uncertainty |             |              |         |      |       | ± 11.0 %    | ± 10.8 %    |
| Coverage Factor for 95 %      |             |              |         |      |       | K=2         |             |
| Expanded Uncertainty          |             |              |         |      |       | ± 22.0 %    | ± 21.5 %    |

**Table 13.2 Uncertainty Budget for frequency range 300 MHz to 3 GHz**

| Error Description             | Uncertainty | Probability  | Divisor | Ci   | Ci    | Standard    | Standard    |
|-------------------------------|-------------|--------------|---------|------|-------|-------------|-------------|
|                               | Value       | Distribution |         | (1g) | (10g) | Uncertainty | Uncertainty |
|                               | (±%)        |              |         |      |       | (1g)        | (10g)       |
| Measurement System            |             |              |         |      |       |             |             |
| Probe Calibration             | 6.55        | Normal       | 1       | 1    | 1     | ± 6.55 %    | ± 6.55 %    |
| Axial Isotropy                | 4.7         | Rectangular  | √3      | 0.7  | 0.7   | ± 1.9 %     | ± 1.9 %     |
| Hemispherical Isotropy        | 9.6         | Rectangular  | √3      | 0.7  | 0.7   | ± 3.9 %     | ± 3.9 %     |
| Boundary Effects              | 2.0         | Rectangular  | √3      | 1    | 1     | ± 1.2 %     | ± 1.2 %     |
| Linearity                     | 4.7         | Rectangular  | √3      | 1    | 1     | ± 2.7 %     | ± 2.7 %     |
| System Detection Limits       | 1.0         | Rectangular  | √3      | 1    | 1     | ± 0.6 %     | ± 0.6 %     |
| Readout Electronics           | 0.3         | Normal       | 1       | 1    | 1     | ± 0.3 %     | ± 0.3 %     |
| Response Time                 | 0.8         | Rectangular  | √3      | 1    | 1     | ± 0.5 %     | ± 0.5 %     |
| Integration Time              | 2.6         | Rectangular  | √3      | 1    | 1     | ± 1.5 %     | ± 1.5 %     |
| RF Ambient Noise              | 3.0         | Rectangular  | √3      | 1    | 1     | ± 1.7 %     | ± 1.7 %     |
| RF Ambient Reflections        | 3.0         | Rectangular  | √3      | 1    | 1     | ± 1.7 %     | ± 1.7 %     |
| Probe Positioner              | 0.8         | Rectangular  | √3      | 1    | 1     | ± 0.5 %     | ± 0.5 %     |
| Probe Positioning             | 9.9         | Rectangular  | √3      | 1    | 1     | ± 5.7 %     | ± 5.7 %     |
| Max. SAR Eval.                | 4.0         | Rectangular  | √3      | 1    | 1     | ± 2.3 %     | ± 2.3 %     |
| Test Sample Related           |             |              |         |      |       |             |             |
| Device Positioning            | 2.9         | Normal       | 1       | 1    | 1     | ± 2.9 %     | ± 2.9 %     |
| Device Holder                 | 3.6         | Normal       | 1       | 1    | 1     | ± 3.6 %     | ± 3.6 %     |
| Power Drift                   | 5.0         | Rectangular  | √3      | 1    | 1     | ± 2.9 %     | ± 2.9 %     |
| Phantom and Setup             |             |              |         |      |       |             |             |
| Phantom Uncertainty           | 4.0         | Rectangular  | √3      | 1    | 1     | ± 2.3 %     | ± 2.3 %     |
| Liquid Conductivity (Target)  | 5.0         | Rectangular  | √3      | 0.64 | 0.43  | ± 1.8 %     | ± 1.2 %     |
| Liquid Conductivity (Meas.)   | 2.5         | Normal       | 1       | 0.64 | 0.43  | ± 1.6 %     | ± 1.1 %     |
| Liquid Permittivity (Target)  | 5.0         | Rectangular  | √3      | 0.6  | 0.49  | ± 1.7 %     | ± 1.4 %     |
| Liquid Permittivity (Meas.)   | 2.5         | Normal       | 1       | 0.6  | 0.49  | ± 1.5 %     | ± 1.2 %     |
| Combined Standard Uncertainty |             |              |         |      |       | ± 12.8 %    | ± 12.6 %    |
| Coverage Factor for 95 %      |             |              |         |      |       | K=2         |             |
| Expanded Uncertainty          |             |              |         |      |       | ± 25.6 %    | ± 25.2 %    |

**Table 13.3 Uncertainty Budget for frequency range 3 GHz to 6 GHz**

## **14. References**

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2003, “Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, December 2003
- [4] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), “Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields”, June 2001
- [5] SPEAG DASY System Handbook
- [6] FCC KDB 248227 D01 v01r02, “SAR Measurement Procedures for 802.11 a/b/g Transmitters”, May 2007
- [7] FCC KDB 447498 D01 v05, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, October 2012
- [8] FCC KDB 648474 D04 v01, “SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas”, October 2012
- [9] FCC KDB 941225 D05 v01, “SAR Test Considerations for LTE Handsets and Data Modems”, December 15 2010
- [10] FCC KDB 941225 D01 v02, “SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA”, October 2007
- [11] FCC KDB 941225 D06 v01, “SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities”, April 2011
- [12] FCC KDB 865664 D01 v01, “SAR Measurement Requirements for 100MHz to 6 GHz”, October 2012