



OET 65

TEST REPORT

Product Name	WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone
Model	ZTE V768
FCC ID	Q78-ZTEV768
Client	ZTE CORPORATION


TA Technology (Shanghai) Co., Ltd.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 2 of 250

GENERAL SUMMARY

Product Name	WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Model	ZTE V768
FCC ID	Q78-ZTEV768	Report No.	RZA1203-0414SAR01R2
Client	ZTE CORPORATION		
Manufacturer	ZTE CORPORATION		
Reference Standard(s)	<p>IEEE Std C95.1, 1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radiofrequency Electromagnetic Fields, 3 kHz to 300 GHz.</p> <p>IEEE Std 1528™-2003: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.</p> <p>SUPPLEMENT C Edition 01-01 to OET BULLETIN 65 Edition 97-01 June 2001 including DA 02-1438, published June 2002: Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields Additional Information for Evaluation Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions.</p> <p>KDB 648474 D01 SAR Handsets Multi Xmitter and Ant, v01r05: SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas.</p> <p>KDB 941225 D06 Hot Spot SAR v01 SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities</p> <p>KDB941225 D01 SAR test for 3G devices v02: SAR Measurement Procedures CDMA 20001x RTT, 1x Ev-Do, WCDMA, HSDPA/HSPA</p>		
Conclusion	<p>This portable wireless equipment has been measured in all cases requested by the relevant standards. Test results in Chapter 7 of this test report are below limits specified in the relevant standards.</p> <p>General Judgment: Pass</p> <div style="text-align: right;">  (Stamp) Date of issue: June 13th, 2012 </div>		
Comment	The test result only responds to the measured sample.		

Approved by 杨伟中
Director

Revised by 凌敏宝
SAR Manager

Performed by 秦凯
SAR Engineer

TABLE OF CONTENT

1. General Information	5
1.1. Notes of the Test Report.....	5
1.2. Testing Laboratory	5
1.3. Applicant Information	6
1.4. Manufacturer Information.....	6
1.5. Information of EUT.....	7
1.6. The Maximum SAR _{1g} Values	10
1.7. Test Date	11
2. SAR Measurements System Configuration.....	12
2.1. SAR Measurement Set-up.....	12
2.2. DASY5 E-field Probe System	13
2.2.1. EX3DV4 Probe Specification	13
2.2.2. E-field Probe Calibration.....	14
2.3. Other Test Equipment	14
2.3.1. Device Holder for Transmitters	14
2.3.2. Phantom	15
2.4. Scanning Procedure	15
2.5. Data Storage and Evaluation	17
2.5.1. Data Storage.....	17
2.5.2. Data Evaluation by SEMCAD	17
3. Laboratory Environment.....	19
4. Tissue-equivalent Liquid	20
4.1. Tissue-equivalent Liquid Ingredients.....	20
4.2. Tissue-equivalent Liquid Properties	22
5. System Check.....	24
5.1. Description of System Check.....	24
5.2. System Check Results.....	26
6. Operational Conditions during Test	27
6.1. General Description of Test Procedures	27
6.2. Test Positions.....	27
6.2.1. Against Phantom Head.....	27
6.2.2. Body Worn Configuration.....	27
6.3. Test Configuration	28
6.3.1. GSM Test Configuration.....	28
6.3.2. WCDMA Test Configuration.....	28
6.3.3. HSDPA Test Configuration	29
6.3.4. HSUPA Test Configuration	29
6.3.5. WIFI Test Configuration	29
7. Test Results	29
7.1. Conducted Power Results	29

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 4 of 250

7.2. SAR Test Results	29
7.2.1. GSM 850 (GPRS/EGPRS).....	29
7.2.2. GSM 1900 (GPRS/EGPRS).....	29
7.2.3. WCDMA Band II (WCDMA/HSDPA/HSUPA)	29
7.2.4. WCDMA Band IV (WCDMA/HSDPA/HSUPA).....	29
7.2.5. WCDMA Band V (WCDMA).....	29
7.2.6. Bluetooth/WiFi Function.....	29
8. 300MHz to 3GHz Measurement Uncertainty.....	29
9. Main Test Instruments	29
ANNEX A: Test Layout	29
ANNEX B: System Check Results	29
ANNEX C: Graph Results	29
ANNEX D: Probe Calibration Certificate	29
ANNEX E: D835V2 Dipole Calibration Certificate	29
ANNEX F: D1750V2 Dipole Calibration Certificate	29
ANNEX G: D1900V2 Dipole Calibration Certificate.....	29
ANNEX H: D2450V2 Dipole Calibration Certificate	29
ANNEX I: DAE4 Calibration Certificate	29
ANNEX J: The EUT Appearances and Test Configuration	29

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1203-0414SAR01R2

Page 5 of 250

1. General Information

1.1. Notes of the Test Report

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

If the electrical report is inconsistent with the printed one, it should be subject to the latter.

1.2. Testing Laboratory

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Yang Weizhong
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: yangweizhong@ta-shanghai.com

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 6 of 250

1.3. Applicant Information

Company: ZTE CORPORATION
Address: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen,
Guangdong, 518057, P.R. China
City: Shenzhen
Postal Code: 518057
Country: P.R. China

1.4. Manufacturer Information

Company: ZTE CORPORATION
Address: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen,
Guangdong, 518057, P.R. China
City: Shenzhen
Postal Code: 518057
Country: P.R. China

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 7 of 250

1.5. Information of EUT

General Information

Device Type:	Portable Device		
Exposure Category:	Uncontrolled Environment / General Population		
State of Sample:	Prototype Unit		
Product Name:	WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone		
IMEI:	865074010003860		
Hardware Version:	gcnb		
Software Version:	V768V1.0.0B01		
Antenna Type:	Internal Antenna		
Device Operating Configurations :			
Supporting Mode(s):	GSM 850/GSM 1900; (tested)		
	WCDMA Band II/WCDMA Band IV/ WCDMA Band V; (tested)		
	WiFi(802.11b/g/n)/ Bluetooth; (untested)		
Test Modulation:	(GSM)GMSK; (WCDMA)QPSK		
Device Class:	B		
HSDPA UE Category:	8		
HSUPA UE Category:	6		
GPRS Multislot Class(12):	Max Number of Timeslots in Uplink	4	
	Max Number of Timeslots in Downlink	4	
	Max Total Timeslot	5	
EGPRS Multislot Class(12):	Max Number of Timeslots in Uplink	4	
	Max Number of Timeslots in Downlink	4	
	Max Total Timeslot	5	
Operating Frequency Range(s):	Mode	Tx (MHz)	Rx (MHz)
	GSM 850	824.2 ~ 848.8	869.2 ~ 893.8
	GSM 1900	1850.2 ~ 1909.8	1930.2 ~ 1989.8
	WCDMA Band II	1852.4 ~ 1907.6	1932.4 ~ 1987.6
	WCDMA Band IV	1712.4 ~ 1752.6	2112.4 ~ 2152.6
	WCDMA Band V	826.4 ~ 846.6	871.4 ~ 891.6
Power Class:	GSM 850: 4, tested with power level 5		
	GSM 1900: 1, tested with power level 0		
	WCDMA Band II: 3, tested with power control all up bits		

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 8 of 250

	WCDMA Band IV: 3, tested with power control all up bits		
	WCDMA Band V: 3, tested with power control all up bits		
Test Channel: (Low - Middle - High)	128-190-251	(GSM 850)	(tested)
	512-661-810	(GSM 1900)	(tested)
	9262-9400-9538	(WCDMA Band II)	(tested)
	1312-1413-1513	(WCDMA Band IV)	(tested)
	4132-4183-4233	(WCDMA Band V)	(tested)
	1 - 6 - 11	(802.11b)	(tested)

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1203-0414SAR01R2

Page 9 of 250

Auxiliary Equipment Details

AE:Battery

Model: Li3715T42P3h504857

Manufacturer: ZTE CORPORATION

S/N: 10101112282582228

Equipment Under Test (EUT) is a WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone. The device has an internal antenna for GSM/WCDMA Tx/Rx, and the second is BT/WiFi antenna that can be used for Tx/Rx. and the third is GPS antenna that can be used for Rx. It has Personal Wireless Routers (hot spots) function. The detail about EUT and Lithium Battery is in chapter 1.5 in this report. SAR is tested for GSM 850,GSM 1900, WCDMA Band II,WCDMA Band IV, WCDMA Band V and WiFi.

The sample under test was selected by the client.

Components list please refer to documents of the manufacturer.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 10 of 250

1.6. The Maximum SAR_{1g} Values

Head SAR Configuration

Mode	Channel	Position	SAR _{1g} (W/kg)
GSM 850	Middle/190	Right, Cheek	0.643
GSM 1900	Middle/661	Left, Cheek	0.770
WCDMA Band II	Middle/9400	Left, Cheek	1.250
WCDMA Band IV	Middle/1413	Left, Cheek	1.380
WCDMA Band V	High/4233	Right, Cheek	0.444
WiFi(802.11b)	Middle/6	Left, Cheek	0.501

Body Worn Configuration

Mode	Channel	Position	Separation distance	SAR _{1g} (W/kg)
2Txslots GPRS 850	Middle/190	Back Side	10mm	1.440
2Txslots EGPRS 1900	Middle/661	Back Side	10mm	0.992
WCDMA Band II	Middle/9400	Back Side	10mm	1.280
WCDMA Band IV	Middle/1413	Front Side	10mm	1.250
WCDMA Band V	High/4233	Back Side	10mm	0.75
WiFi(802.11b)	Middle/6	Back Side	10mm	0.198

Hotspot SAR Configuration

Mode	Channel	Position	Separation distance	SAR _{1g} (W/kg)
2Txslots GPRS 850	Middle/190	Back Side	10mm	1.440
2Txslots EGPRS 1900	Middle/661	Back Side	10mm	0.992
WCDMA Band II	Middle/9400	Back Side	10mm	1.280
WCDMA Band IV	Middle/1413	Front Side	10mm	1.250
WCDMA Band V	High/4233	Back Side	10mm	0.750
WiFi(802.11b)	Middle/6	Back Side	10mm	0.198

Simultaneous SAR

Test Position	SAR _{1g} (W/kg)	WCDMA Band IV	WIFI (802.11b)	MAX. ΣSAR _{1g}
	Left hand, Touch cheek		1.380	0.501

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 11 of 250

1.7. Test Date

The test performed from April 10, 2012 to April 12, 2012 and from June 8, 2012 to June 11, 2012.

2. SAR Measurements System Configuration

2.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

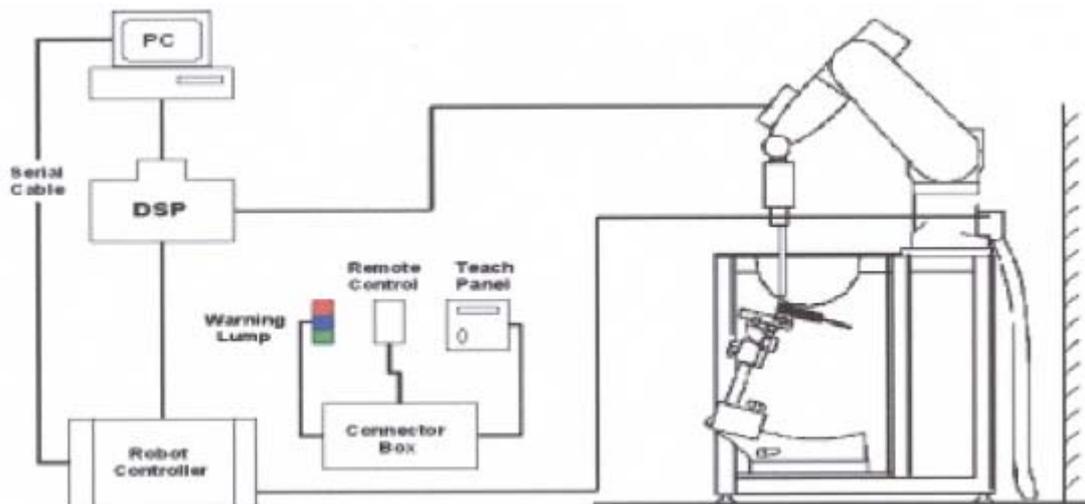


Figure 1 SAR Lab Test Measurement Set-up

2.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

2.2.1. EX3DV4 Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



Figure 2. EX3DV4 E-field Probe



Figure 3. EX3DV4 E-field probe

2.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),
C = Heat capacity of tissue (brain or muscle),
 ΔT = Temperature increase due to RF exposure.
Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:
 σ = Simulated tissue conductivity,
 ρ = Tissue density (kg/m³).

2.3. Other Test Equipment

2.3.1. Device Holder for Transmitters

The DASY device holder is designed to cope with the different positions given in the standard.

It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Figure 4 Device Holder

2.3.2. Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden Figure. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special



Figure 5 Generic Twin Phantom

2.4. Scanning Procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. ± 5 %.
- The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1mm). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within ± 30°.)
- Area Scan
The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1203-0414SAR01R2

Page 16 of 250

spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

- Zoom Scan

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

- Spatial Peak Detection

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

2.5. Data Storage and Evaluation

2.5.1. Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DA4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

2.5.2. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	Dcp _i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	
	- Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 18 of 250

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With V_i = compensated signal of channel i (i = x, y, z)

U_i = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$

With V_i = compensated signal of channel i (i = x, y, z)

$Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot})^2 \cdot \sigma / (\rho \cdot 1000)$$

with **SAR** = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with **P_{pwe}** = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

3. Laboratory Environment

Table 1: The Requirements of the Ambient Conditions

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards.	
Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

4. Tissue-equivalent Liquid

4.1. Tissue-equivalent Liquid Ingredients

The liquid is consisted of water, salt and Glycol. The liquid has previously been proven to be suited for worst-case. The table 2 and table 3 show the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the OET 65.

Table 2: Composition of the Head Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Brain) 835MHz
Water	41.45
Sugar	56
Salt	1.45
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=41.5$ $\sigma=0.9$

MIXTURE%	FREQUENCY(Brain) 1750MHz
Water	55.24
Glycol	44.45
Salt	0.31
Dielectric Parameters Target Value	f=1750MHz $\epsilon=40.1$ $\sigma=1.37$

MIXTURE%	FREQUENCY(Brain) 1900MHz
Water	55.242
Glycol monobutyl	44.452
Salt	0.306
Dielectric Parameters Target Value	f=1900MHz $\epsilon=40.0$ $\sigma=1.40$

MIXTURE%	FREQUENCY(Brain) 2450MHz
Water	62.7
Glycol	36.8
Salt	0.5
Dielectric Parameters Target Value	f=2450MHz $\epsilon=39.20$ $\sigma=1.80$

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 21 of 250

Table 3: Composition of the Body Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Body) 835MHz
Water	52.5
Sugar	45
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=55.2$ $\sigma=0.97$

MIXTURE%	FREQUENCY(Body) 1750MHz
Water	69.91
Glycol	29.97
Salt	0.12
Dielectric Parameters Target Value	f=1750MHz $\epsilon=53.4$ $\sigma=1.49$

MIXTURE%	FREQUENCY (Body) 1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$

MIXTURE%	FREQUENCY(Body) 2450MHz
Water	73.2
Glycol	26.7
Salt	0.1
Dielectric Parameters Target Value	f=2450MHz $\epsilon=52.70$ $\sigma=1.95$

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 22 of 250

4.2. Tissue-equivalent Liquid Properties

Table 4: Dielectric Performance of Head Tissue Simulating Liquid

Frequency	Description	Dielectric Parameters		Temp °C
		ϵ_r	σ (s/m)	
835MHz (head)	Target value ± 5% window	41.50 39.43 — 43.58	0.90 0.86 — 0.95	22.0
	Measurement value 2012-6-10	41.4	0.899	21.5
1750MHz (head)	Target value ± 5% window	40.10 38.10 — 42.11	1.37 1.30 — 1.44	22.0
	Measurement value 2012-4-10	40.04	1.34	21.7
1900MHz (head)	Target value ±5% window	40.00 38.00 — 42.00	1.40 1.33 — 1.47	22.0
	Measurement value 2012-4-10	40.82	1.41	21.8
	Measurement value 2012-6-11	40.8	1.41	21.5
2450MHz (head)	Target value ±5% window	39.20 37.24 — 41.16	1.80 1.71 — 1.89	22.0
	Measurement value 2012-4-12	38.32	1.88	21.8

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 23 of 250

Table 5: Dielectric Performance of Body Tissue Simulating Liquid

Frequency	Description	Dielectric Parameters		Temp ℃
		ϵ_r	σ (s/m)	
835MHz (body)	Target value ±5% window	55.20 52.44 — 57.96	0.97 0.92 — 1.02	22.0
	Measurement value 2012-6-8	54.4	0.951	21.5
1750MHz (body)	Target value ±5% window	53.40 50.73 — 56.07	1.49 1.42 — 1.56	22.0
	Measurement value 2012-4-11	53.43	1.50	21.7
1900MHz (body)	Target value ±5% window	53.30 50.64 — 55.97	1.52 1.44 — 1.60	22.0
	Measurement value 2012-4-11	52.14	1.56	21.8
	Measurement value 2012-6-9	53.0	1.48	21.5
2450MHz (body)	Target value ±5% window	52.70 50.07 — 55.34	1.95 1.85 — 2.05	22.0
	Measurement value 2012-4-12	51.69	1.90	21.9

5. System Check

5.1. Description of System Check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulates were measured every day using the dielectric probe kit and the network analyzer. A system check measurement was made following the determination of the dielectric parameters of the simulates, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the table 6 and table 7.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

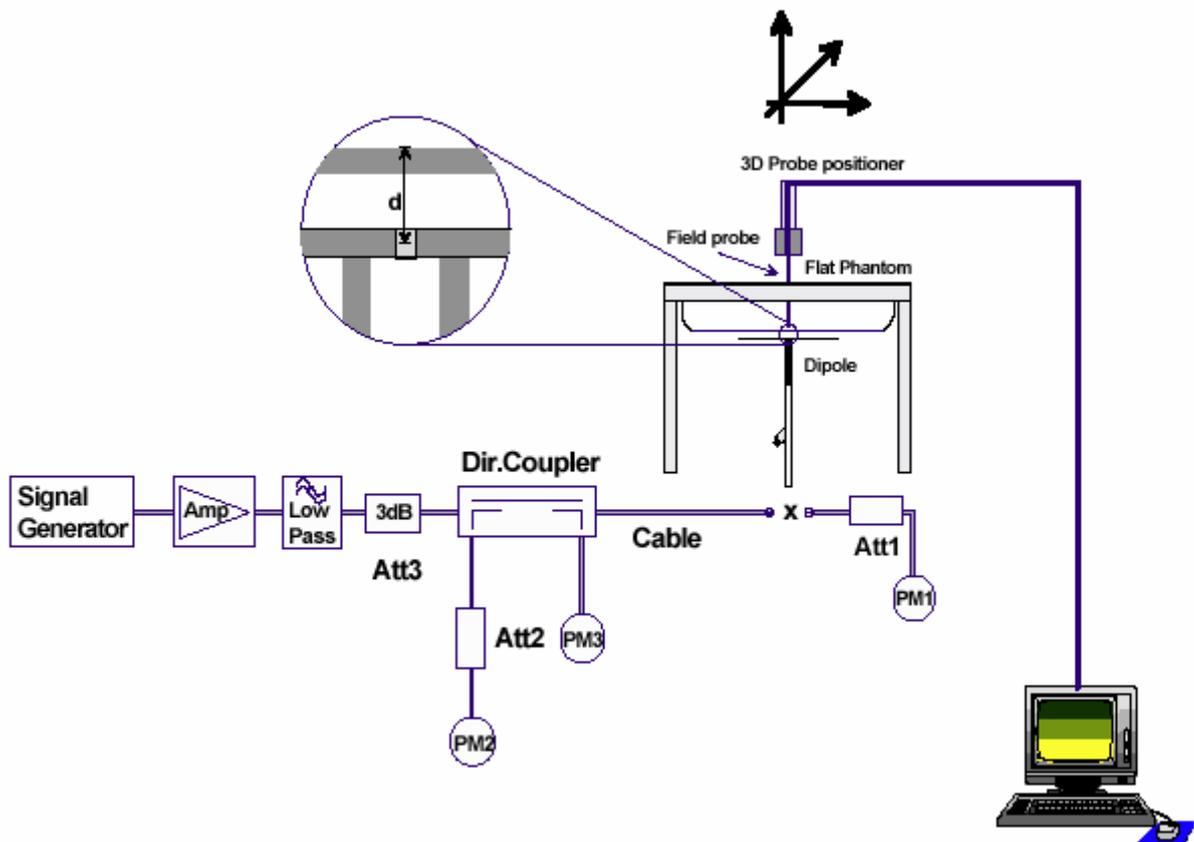


Figure 6 System Check Set-up

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 25 of 250

Justification for Extended SAR Dipole Calibrations

Usage of SAR dipoles calibrated less than 2 years ago but more than 1 year ago were confirmed in maintaining return loss (< - 20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB Publication 450824:

Dipole D1750V2 SN: 1033				
Head Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	$\Delta\Omega$
5/17/2010	-38.1	4.2%	49.4	1.7 Ω
5/16/2011	-36.5		51.1	
Body Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	$\Delta\Omega$
5/17/2010	-25.7	2.7 %	45.1	1.6 Ω
5/16/2011	-26.4		46.7	

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 26 of 250

5.2. System Check Results

Table 6: System Check in Head Tissue Simulating Liquid

Frequency	Test Date	Dielectric Parameters		Temp (°C)	250mW Measured SAR _{1g}	1W Normalized SAR _{1g}	1W Target SAR _{1g} (±10% deviation)
		ε _r	σ(s/m)				
835MHz	2012-6-10	41.4	0.899	21.5	2.52	10.08	9.34 (8.41~10.27)
1750MHz	2012-4-10	40.04	1.34	21.7	8.79	35.16	36.10 (32.49~39.71)
1900MHz	2012-4-10	40.82	1.41	21.8	10.33	41.32	40.30 (36.27~ 44.33)
	2012-6-8	40.8	1.41	21.5	10.1	40.4	
2450MHz	2012-4-12	38.32	1.88	21.8	14.06	56.24	53.80 (48.42~ 59.18)

Note: 1. The graph results see ANNEX B.
2. Target Values derive from the calibration certificate

Table 7: System Check in Body Tissue Simulating Liquid

Frequency	Test Date	Dielectric Parameters		Temp (°C)	250mW Measured SAR _{1g}	1W Normalized SAR _{1g}	1W Target SAR _{1g} (±10% deviation)
		ε _r	σ(s/m)				
835MHz	2012-6-11	54.4	0.951	21.5	2.48	9.92	9.46 (8.51~10.41)
1750MHz	2012-4-11	53.43	1.50	21.7	9.24	36.96	38.50 (34.65~ 42.35)
1900MHz	2012-4-11	52.14	1.56	21.8	10.20	40.80	41.70 (37.53~45.87)
	2012-6-9	53	1.48	21.5	10.1	40.4	
2450MHz	2012-4-12	51.69	1.90	21.9	14.01	56.04	51.70 (46.53~56.87)

Note: 1. The graph results see ANNEX B.
2. Target Values derive from the calibration certificate

6. Operational Conditions during Test

6.1. General Description of Test Procedures

A communication link is set up with a System Simulator (SS) by air link, and a call is established. The Absolute Radiofrequency Channel Number (ARFCN) is allocated to 128, 190 and 251 in the case of GSM 850, to 512, 661 and 810 in the case of GSM 1900, to 9262, 9400 and 9538 in the case of WCDMA Band II, to 1312, 1413 and 1513 in the case of WCDMA Band IV to 4132, 4183 and 4233 in the case of WCDMA Band V. The EUT is commanded to operate at maximum transmitting power.

Connection to the EUT is established via air interface with E5515C, and the EUT is set to maximum output power by E5515C. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. The antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30 dB.

6.2. Test Positions

6.2.1. Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate(SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

6.2.2. Body Worn Configuration

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device.

Based upon KDB941225 D06 V01, when the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested. The distance between the device and the phantom was kept 10mm of wireless routers.

6.3. Test Configuration

6.3.1. GSM Test Configuration

SAR tests for GSM 1900 and GSM850, a communication link is set up with a System Simulator (SS) by air link. Using E5515C the power lever is set to “5” for GSM 850, set to “0” for GSM 1900. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 5; the EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following:

Table 8: The allowed power reduction in the multi-slot configuration

Number of timeslots in uplink assignment	Permissible nominal reduction of maximum output power,(dB)
1	0
2	0 to 3,0
3	1,8 to 4,8
4	3,0 to 6,0

6.3.2. WCDMA Test Configuration

6.3.2.1. Output power Verification

Maximum output power is verified on the High, Middle and Low channel according to the procedures described in section 5.2 of 3GPP TS 34. 121, using the appropriate RMC or AMR with TPC(transmit power control) set to all up bits for WCDMA/HSDPA or applying the required inner loop power control procedures to the maximum output power while HSUPA is active. Results for all applicable physical channel configuration (DPCCH, DPDCH_n and spreading codes, HSDPA, HSPA) should be tabulated in the SAR report. All configuration that are not supported by the DUT or can not be measured due to technical or equipment limitations should be clearly identified

6.3.2.2. Head SAR Measurements

SAR for head exposure configurations in voice mode is measured using a 12.2kbps RMC with TPC bits configured to all up bits. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2kbps AMR is less than 1/4 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2kbps AMR with a 3.4 kbps SRB(Signaling radio bearer) using the exposure configuration that results in the highest SAR in 12.2kbps RMC for that RF channel.

6.3.2.3. Body SAR Measurements

SAR for body exposure configurations in voice and data modes is measured using 12.2kbps RMC with TPC bits configured to all up bits. SAR for other spreading codes and multiple DPDCH_n, when supported by the DUT, are not required when the maximum average output of each RF channel, for each spreading code and DPDCH_n configuration, are less than 1/4 dB higher than those measured in 12.2kbps RMC. Otherwise, SAR is measured on the maximum output channel with an applicable RMC configuration for the corresponding spreading code or DPDCH_n using the exposure configuration that results in the highest SAR with 12.2 kbps RMC. When more than 2 DPDCH_n are supported by the DUT, it may be necessary to configure additional DPDCH_n for a DUT using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

6.3.3. HSDPA Test Configuration

SAR for body exposure configurations is measured according to the ‘Body SAR Measurements’ procedures of that section. In addition, body SAR is also measured for HSDPA when the maximum average output of each RF channel with HSDPA active is at least ¼ dB higher than that measured without HSDPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit.³⁰ Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to the UE category of a test device. The number of HSDSCH/ HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) should be set according to values indicated in the Table below.³² The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Table 9: Subtests for UMTS Release 5 HSDPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (note 1, note 2)	CM(dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	12/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$

Note2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1.A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 8$ ($A_{hs} = 30/15$) with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} =$

TA Technology (Shanghai) Co., Ltd.

Test Report

7 ($A_{HS}=24/15$) with $\beta_{HS}=24/15*\beta_c$.

Note3: CM=1 for $\beta_c/\beta_d =12/15$, $\beta_{HS}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4:For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1,TF1) to $\beta_c=11/15$ and $\beta_d=15/15$.

Table 10: Settings of required H-Set 1 QPSK in HSDPA mode

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	534
Inter-TTI Distance	TTI's	3
Number of HARQ Processes	Processes	2
Information Bit Payload (N_{INF})	Bits	3202
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	4800
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	9600
Coding Rate	/	0.67
Number of Physical Channel Codes	Codes	5
Modulation	/	QPSK

Table 11: HSDPA UE category

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum Transport Bits/HS-DSCH	Total Channel
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

6.3.4. HSUPA Test Configuration

Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least ¼ dB higher than that measured without HSPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA.⁴⁰

Due to inner loop power control requirements in HSPA, a commercial communication test set should be used for the output power and SAR tests.⁴¹ The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA should be configured according to the β values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of 3 G device.

Table 12: Sub-Test 5 Setup for Release 6 HSUPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 32 of 250

Table 13: HSUPA UE category

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI (ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	11484	5.76
	4	4	10		20000	2.00
7 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	22996	?
	4	4	10		20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4.
 UE Categories 1 to 6 supports QPSK only. UE Category 7 supports QPSK and 16QAM.
 (TS25.306-7.3.0)

6.3.5. WIFI Test Configuration

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal. This RF signal utilized in SAR measurement has almost 100% duty cycle and its crest factor is 1.

For the 802.11b/g SAR tests, a communication link is set up with the test mode software for WIFI mode test. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 1, 6 and 11 respectively in the case of 2450 MHz. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate. Testing at higher data rates is not required when the maximum average output power is less than 0.25dB higher than those measured at the lowest data rate.

802.11b/g operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g modes are tested on channels 1, 6, 11; however, if output power reduction is necessary for channels 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels must be tested instead.

SAR is not required for 802.11g channels when the maximum average output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels. When the maximum average output channel in each frequency band is not included in the “default test channels”, the maximum channel should be tested instead of an adjacent “default test channels”, these are referred to as the “required test channels” and are illustrated in table 8.

Table 14: “Default Test Channels”

Mode	GHz	Channel	Turbo Channel	“Default Test Channels”			
				15.247		UNII	
				802.11b	802.11g		
802.11b/g	2.412	1 [#]		√	*		
	2.437	6	6	√	*		
	2.462	11 [#]		√	*		

Note: [#]=when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest out put channels closet to each of these channels should be tested.
 √= “default test channels”
 * =possible 802.11g channels with maximum average output 0.25dB>=the “default test channels”

”

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1203-0414SAR01R2

Page 34 of 250

7. Test Results

7.1. Conducted Power Results

Table 15: Conducted Power Measurement Results

GSM 850		Burst Conducted Power(dBm)				Average power(dBm)		
		Channel 128	Channel 190	Channel 251		Channel 128	Channel 190	Channel 251
GSM		31.76	31.72	31.57	-9.03dB	22.73	22.69	22.54
GPRS (GMSK)	1Txslot	31.86	31.66	31.57	-9.03dB	22.83	22.63	22.54
	2Txslots	30.60	30.55	30.48	-6.02dB	24.58	24.53	24.46
	3Txslots	28.59	28.53	28.43	-4.26dB	24.33	24.27	24.17
	4Txslots	26.53	26.52	26.44	-3.01dB	23.52	23.51	23.43
EGPRS (GMSK)	1Txslot	31.84	31.67	31.56	-9.03dB	22.81	22.64	22.53
	2Txslots	30.66	30.56	30.46	-6.02dB	24.64	24.54	24.44
	3Txslots	28.60	28.53	28.45	-4.26dB	24.34	24.27	24.19
	4Txslots	26.56	26.54	26.44	-3.01dB	23.55	23.53	23.43
EGPRS (8PSK)	1Txslot	26.71	26.53	26.57	-9.03dB	17.68	17.50	17.54
	2Txslots	25.02	24.95	25.13	-6.02dB	19.00	18.93	19.11
	3Txslots	22.52	22.76	22.91	-4.26dB	18.26	18.50	18.65
	4Txslots	20.37	20.73	20.85	-3.01dB	17.36	17.72	17.84
GSM 1900		Burst Conducted Power(dBm)				Average power(dBm)		
		Channel 512	Channel 661	Channel 810		Channel 512	Channel 661	Channel 810
GSM		29.10	29.52	29.30	-9.03dB	20.07	20.49	20.27
GPRS (GMSK)	1Txslot	29.10	29.49	29.29	-9.03dB	20.07	20.46	20.26
	2Txslots	27.56	27.96	27.78	-6.02dB	21.54	21.94	21.76
	3Txslots	25.53	25.96	25.81	-4.26dB	21.27	21.7	21.55
	4Txslots	23.48	23.98	23.86	-3.01dB	20.47	20.97	20.85
EGPRS (GMSK)	1Txslot	29.09	29.5	29.3	-9.03dB	20.06	20.47	20.27
	2Txslots	27.56	27.96	27.8	-6.02dB	21.54	21.94	21.78
	3Txslots	25.52	25.96	25.83	-4.26dB	21.26	21.7	21.57
	4Txslots	23.48	23.98	23.87	-3.01dB	20.47	20.97	20.86
EGPRS (8PSK)	1Txslot	27.02	27.36	27.08	-9.03dB	17.99	18.33	18.05
	2Txslots	25.66	25.98	25.82	-6.02dB	19.64	19.96	19.8

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 35 of 250

	3Txslots	23.48	23.86	23.74	-4.26dB	19.22	19.6	19.48
	4Txslots	21.24	21.63	21.56	-3.01dB	18.23	18.62	18.55

Note:

1) Division Factors

To average the power, the division factor is as follows:

1Txslot = 1 transmit time slot out of 8 time slots

=> conducted power divided by (8/1) => -9.03 dB

2Txslots = 2 transmit time slots out of 8 time slots

=> conducted power divided by (8/2) => -6.02 dB

3Txslots = 3 transmit time slots out of 8 time slots

=> conducted power divided by (8/3) => -4.26 dB

4Txslots = 4 transmit time slots out of 8 time slots

=> conducted power divided by (8/4) => -3.01 dB

2) Average power numbers

The maximum power numbers are marks in bold.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 36 of 250

WCDMA Band II		Conducted Power (dBm)		
		Channel 9262	Channel 9400	Channel 9538
RMC	12.2kbps RMC	22.45	22.96	23.12
	64kbps RMC	22.43	22.95	23.11
	144kbps RMC	22.44	22.94	23.11
	384kbps RMC	22.42	22.94	23.09
HSDPA	Sub - Test 1	22.46	23.08	23.15
	Sub - Test 2	21.92	22.51	22.76
	Sub - Test 3	21.85	22.65	22.73
	Sub - Test 4	21.95	22.68	22.70
HSUPA	Sub - Test 1	21.30	21.92	21.98
	Sub - Test 2	20.40	20.99	21.01
	Sub - Test 3	20.75	21.27	21.34
	Sub - Test 4	20.39	20.89	21.00
	Sub - Test 5	21.34	21.97	22.00
WCDMA Band IV		Conducted Power (dBm)		
		Channel 1312	Channel 1413	Channel 1513
RMC	12.2kbps RMC	23.10	23.06	23.11
	64kbps RMC	23.12	23.02	23.17
	144kbps RMC	22.97	22.98	23.07
	384kbps RMC	23.04	22.97	23.08
HSDPA	Sub - Test 1	23.03	23.02	23.04
	Sub - Test 2	23.02	22.99	23.01
	Sub - Test 3	22.99	22.98	22.98
	Sub - Test 4	22.96	22.96	22.97
HSUPA	Sub - Test 1	21.8	21.67	21.66
	Sub - Test 2	20.27	20.23	20.25
	Sub - Test 3	20.89	20.86	20.85
	Sub - Test 4	20.29	20.25	20.27
	Sub - Test 5	21.82	21.77	21.76
WCDMA Band V		Conducted Power (dBm)		
		Channel 4132	Channel 4183	Channel 4233

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 37 of 250

RMC	12.2kbps RMC	22.95	22.36	22.50
	64kbps RMC	22.93	22.34	22.48
	144kbps RMC	22.92	22.31	22.45
	384kbps RMC	22.90	22.30	22.40
HSDPA	Sub - Test 1	23.08	22.36	22.70
	Sub - Test 2	22.69	21.96	22.13
	Sub - Test 3	22.46	21.92	22.12
	Sub - Test 4	22.69	22.00	22.05
HSUPA	Sub - Test 1	21.43	20.90	20.89
	Sub - Test 2	20.66	20.12	20.23
	Sub - Test 3	20.97	20.44	20.54
	Sub - Test 4	20.61	20.10	20.20
	Sub - Test 5	21.50	20.92	21.00

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1203-0414SAR01R2

Page 38 of 250

7.2. SAR Test Results

7.2.1. GSM 850 (GPRS/EGPRS)

Table 16: SAR Values [GSM 850(GPRS/EGPRS)]

Limit of SAR		10 g Average	1 g Average	Power Drift	Graph Results
		2.0 W/kg	1.6 W/kg	± 0.21 dB	
Different Test Position	Channel	Measurement Result(W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Test Position of Head					
Left hand, Touch Cheek	Middle/190	0.437	0.584	0.068	Figure 17
Left hand, Tilt 15 Degree	Middle/190	0.290	0.381	-0.002	Figure 18
Right hand, Touch Cheek	High/251	0.444	0.584	0.126	Figure 19
	Middle/190	0.488	0.643	0.052	Figure 20
	Low/128	0.396	0.520	0.051	Figure 21
Right hand, Tilt 15 Degree	Middle/190	0.336	0.439	0.065	Figure 22
Test position of Body (Distance 10mm)					
Back Side(GSM/1Txslot)	High/251	0.581	0.783	0.052	Figure 23
	Middle/190	0.655	0.880	-0.070	Figure 24
	Low/128	0.639	0.859	-0.065	Figure 25
Back Side(2Txslots)	High/251	0.961(max.cube)	1.290(max.cube)	0.001	Figure 26
	Middle/190	1.070	1.440	-0.030	Figure 27
	Low/128	1.03	1.39	0.019	Figure 28
Back Side(3Txslots)	High/251	0.875	1.180	-0.011	Figure 29
	Middle/190	1.000(max.cube)	1.350(max.cube)	-0.030	Figure 30
	Low/128	0.890	1.190	0.015	Figure 31
Back Side(4Txslots)	High/251	0.747	1.010	0.009	Figure 32
	Middle/190	0.800	1.070	0.020	Figure 33
	Low/128	0.721	0.964	0.019	Figure 34
Front Side(2Txslots)	High/251	0.659	0.868	0.110	Figure 35
	Middle/190	0.721	0.943	-0.016	Figure 36
	Low/128	0.624	0.818	-0.032	Figure 37
Left Edge(2Txslots)	Middle/190	0.420	0.612	-0.094	Figure 38
Right Edge(2Txslots)	Middle/190	0.408	0.588	-0.004	Figure 39
Top Edge(2Txslots)	N/A	N/A	N/A	N/A	N/A
Bottom Edge(2Txslots)	Middle/190	0.066	0.103	0.064	Figure 40
Worst Case Position of Body with Earphone (Distance 10mm)					
Back Side(GSM)	Middle/190	0.565	0.767	-0.057	Figure 41
Worst Case Position of Body with EGPRS (GMSK, Distance 10mm)					
Back Side(2Txslots)	Middle/190	1.020	1.370	-0.073	Figure 42

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Upper and lower frequencies were measured at the worst position.

3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8W/kg), testing at the high and low channels is optional.

4. WWAN antenna is located at bottom edge; antenna-to-top edge distance is more than 2.5 cm (see

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 39 of 250

ANNEX I). Based upon KDB941225 D06, when the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.

5. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which v within 2.0dB of the highest peak. The value of the highest cube is given in the table above; the value from the second assessed cube is given in the SAR distribution plots (See ANNEX C).
6. When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1203-0414SAR01R2

Page 40 of 250

7.2.2. GSM 1900 (GPRS/EGPRS)

Table 17: SAR Values [GSM 1900(GPRS/EGPRS)]

Limit of SAR		10 g Average	1 g Average	Power Drift	Graph Results
		2.0 W/kg	1.6 W/kg	± 0.21 dB	
Different Test Position	Channel	Measurement Result(W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Test Position of Head					
Left hand, Touch Cheek	High/810	0.430	0.757	0.145	Figure 43
	Middle/661	0.440	0.770	0.129	Figure 44
	Low/512	0.331	0.578	0.092	Figure 45
Left hand, Tilt 15 Degree	Middle/661	0.139	0.227	0.015	Figure 46
Right hand, Touch Cheek	Middle/661	0.310	0.486	0.071	Figure 47
Right hand, Tilt 15 Degree	Middle/661	0.160	0.278	0.046	Figure 48
Test position of Body (Distance 10mm)					
Back Side(GSM/1Txslot)	Middle/661	0.389	0.648	0.026	Figure 49
Back Side(2Txslots)	High/810	0.512	0.856	-0.082	Figure 50
	Middle/661	0.549	0.915	-0.059	Figure 51
	Low/512	0.441	0.739	-0.003	Figure 52
Back Side(3Txslots)	High/810	0.497	0.827	-0.012	Figure 53
	Middle/661	0.531	0.889	-0.123	Figure 54
	Low/512	0.423	0.712	-0.039	Figure 55
Back Side(4Txslots)	Middle/661	0.459	0.768	0.051	Figure 56
Front Side(2Txslots)	High/810	0.446	0.783	0.029	Figure 57
	Middle/661	0.462	0.806	-0.020	Figure 58
	Low/512	0.375	0.658	0.033	Figure 59
Left Edge(2Txslots)	Middle/661	0.175	0.310	0.009	Figure 60
Right Edge(2Txslots)	Middle/661	0.087	0.151	0.022	Figure 61
Top Edge(2Txslots)	N/A	N/A	N/A	N/A	N/A
Bottom Edge(2Txslots)	Middle/661	0.241	0.421	0.182	Figure 62
Worst Case Position of Body with Earphone (Distance 10mm)					
Back Side(GSM)	Middle/661	0.427	0.714	0.045	Figure 63
Worst Case Position of Body with EGPRS (GMSK, Distance 10mm)					
Back Side(2Txslots)	Middle/661	0.596	0.992	0.133	Figure 64

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Upper and lower frequencies were measured at the worst position.
3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8W/kg), testing at the high and low channels is optional.
4. WWAN antenna is located at bottom edge; antenna-to-top edge distance is more than 2.5 cm (see ANNEX I). Based upon KDB941225 D06, when the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
5. When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1203-0414SAR01R2

Page 41 of 250

7.2.3. WCDMA Band II (WCDMA/HSDPA/HSUPA)

Table 18: SAR Values [WCDMA Band II (WCDMA/HSDPA/HSUPA)]

Limit of SAR		10 g Average	1 g Average	Power Drift	Graph Results
		2.0 W/kg	1.6 W/kg	± 0.21 dB	
Different Test Position	Channel	Measurement Result(W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Test Position of Head					
Left Hand, Touch Cheek	High/9538	0.697	1.240	0.093	Figure 65
	Middle/9400	0.707	1.250	0.129	Figure 66
	Low/9262	0.638	1.130	0.043	Figure 67
Left Hand, Tilt 15 Degree	Middle/9400	0.234	0.383	0.003	Figure 68
Right Hand, Touch Cheek	Middle/9400	0.490(max.cube)	0.775(max.cube)	0.184	Figure 69
Right Hand, Tilt 15 Degree	Middle/9400	0.299	0.523	0.128	Figure 70
Test position of Body (Distance 10mm)					
Back Side	High/9538	0.715	1.190	-0.159	Figure 71
	Middle/9400	0.719	1.200	-0.185	Figure 72
	Low/9262	0.628	1.040	-0.093	Figure 73
Front Side	High/9538	0.593	1.030	-0.019	Figure 74
	Middle/9400	0.614	1.070	-0.056	Figure 75
	Low/9262	0.546	0.954	0.090	Figure 76
Left Edge	Middle/9400	0.199	0.344	0.099	Figure 77
Right Edge	Middle/9400	0.097	0.169	0.088	Figure 78
Top Edge	N/A	N/A	N/A	N/A	N/A
Bottom Edge	Middle/9400	0.333	0.577	0.102	Figure 79
Worst Case Position of Body with Earphone (Distance 10mm)					
Back Side	Middle/9400	0.736	1.230	0.008	Figure 80
Worst Case Position of Body with HSDPA (Distance 10mm)					
Back Side	Middle/9400	0.765	1.280	-0.169	Figure 81
Worst Case Position of Body with HSUPA (Distance 10mm)					
Back Side	Middle/9400	0.608	1.020	-0.011	Figure 82

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 42 of 250

- Note: 1. The value with blue color is the maximum SAR Value of each test band.
2. Upper and lower frequencies were measured at the worst position.
 3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit ($< 0.8\text{W/kg}$), testing at the high and low channels is optional.
 4. WWAN antenna is located at bottom edge; antenna-to-top edge distance is more than 2.5 cm (see ANNEX I). Based upon KDB941225 D06, when the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
 4. WCDMA mode were tested under RMC 12.2kbps with HSPA (HSDPA/HSUPA) inactive per KDB Publication 941225 D01. HSPA (HSDPA/HSUPA) SAR for body was not required since the average output power of the HSPA (HSDPA/HSUPA) subtests was not more than 0.25 dB higher than the RMC level and the maximum SAR for 12.2kbps RMC was less than 75% SAR limit.
 5. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above; the value from the second assessed cube is given in the SAR distribution plots (See ANNEX C).

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 43 of 250

7.2.4. WCDMA Band IV (WCDMA/HSDPA/HSUPA)

Table 19: SAR Values [WCDMA Band IV (WCDMA/HSDPA/HSUPA)]

Limit of SAR		10 g Average	1 g Average	Power Drift	Graph Results
		2.0 W/kg	1.6 W/kg	± 0.21 dB	
Different Test Position	Channel	Measurement Result(W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Test Position of Head					
Left Hand, Touch Cheek	High/1513	0.643	1.140	0.061	Figure 83
	Middle/1413	0.785	1.380	0.045	Figure 84
	Low/1312	0.689	1.210	0.141	Figure 85
Left Hand, Tilt 15 Degree	Middle/1413	0.256	0.395	0.175	Figure 86
Right Hand, Touch Cheek	Middle/1413	0.517(max.cube)	0.798(max.cube)	0.038	Figure 87
Right Hand, Tilt 15 Degree	Middle/1413	0.243	0.398	0.027	Figure 88
Test position of Body (Distance 10mm)					
Back Side	High/1513	0.563	0.939	0.020	Figure 89
	Middle/1413	0.688	1.140	0.070	Figure 90
	Low/1312	0.591	0.981	0.168	Figure 91
Front Side	High/1513	0.527	0.930	-0.037	Figure 92
	Middle/1413	0.712	1.250	-0.026	Figure 93
	Low/1312	0.633	1.120	0.076	Figure 94
Left Edge	Middle/1413	0.216	0.363	0.017	Figure 95
Right Edge	Middle/1413	0.160	0.265	0.007	Figure 96
Top Edge	N/A	N/A	N/A	N/A	N/A
Bottom Edge	Middle/1413	0.275	0.467	0.060	Figure 97
Worst Case Position of Body with Earphone (Distance 10mm)					
Front Side	Middle/1413	0.652	1.130	0.022	Figure 98
Worst Case Position of Body with HSDPA (Distance 10mm)					
Front Side	Middle/1413	0.655	1.150	0.044	Figure 99
Worst Case Position of Body with HSUPA (Distance 10mm)					
Front Side	Middle/1413	0.612	1.060	0.141	Figure 100

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 44 of 250

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Upper and lower frequencies were measured at the worst position.
3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit ($< 0.8\text{W/kg}$), testing at the high and low channels is optional.
4. WWAN antenna is located at bottom edge; antenna-to-top edge distance is more than 2.5 cm (see ANNEX I). Based upon KDB941225 D06, when the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
4. WCDMA mode were tested under RMC 12.2kbps with HSPA (HSDPA/HSUPA) inactive per KDB Publication 941225 D01. HSPA (HSDPA/HSUPA) SAR for body was not required since the average output power of the HSPA (HSDPA/HSUPA) subtests was not more than 0.25 dB higher than the RMC level and the maximum SAR for 12.2kbps RMC was less than 75% SAR limit.
5. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above; the value from the second assessed cube is given in the SAR distribution plots (See ANNEX C).

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 45 of 250

7.2.5. WCDMA Band V (WCDMA)

Table 20: SAR Values [WCDMA Band V (WCDMA)]

Limit of SAR		10 g Average	1 g Average	Power Drift	Graph Results
		2.0 W/kg	1.6 W/kg	± 0.21 dB	
Different Test Position	Channel	Measurement Result(W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Test Position of Head					
Left Hand, Touch Cheek	Middle/4183	0.174	0.236	-0.094	Figure 101
Left Hand, Tilt 15 Degree	Middle/4183	0.120	0.159	0.024	Figure 102
Right Hand, Touch Cheek	High/4233	0.335	0.444	0.044	Figure 103
	Middle/4183	0.214	0.284	0.136	Figure 104
	Low/4132	0.280	0.370	0.151	Figure 105
Right Hand, Tilt 15 Degree	Middle/4183	0.132	0.173	0.003	Figure 106
Test position of Body (Distance 10mm)					
Back Side	High/4233	0.555	0.750	0.006	Figure 107
	Middle/4183	0.406	0.548	-0.043	Figure 108
	Low/4132	0.504	0.678	-0.133	Figure 109
Front Side	Middle/4183	0.242	0.318	-0.005	Figure 110
Left Edge	Middle/4183	0.141	0.206	0.040	Figure 111
Right Edge	Middle/4183	0.141	0.204	-0.023	Figure 112
Top Edge	N/A	N/A	N/A	N/A	N/A
Bottom Edge	Middle/4183	0.021	0.032	0.198	Figure 113
Worst Case Position of Body with Earphone (Distance 10mm)					
Back Side	High/4233	0.461	0.625	-0.079	Figure 114
<p>Note: 1. The value with blue color is the maximum SAR Value of each test band.</p> <p>2. Upper and lower frequencies were measured at the worst position.</p> <p>3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8W/kg), testing at the high and low channels is optional.</p> <p>4. WWAN antenna is located at bottom edge; antenna-to-top edge distance is more than 2.5 cm (see ANNEX I). Based upon KDB941225 D06, when the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.</p>					

TA Technology (Shanghai) Co., Ltd. Test Report

7.2.6. Bluetooth/WiFi Function

The distance between BT/WiFi antenna and GSM/WCDMA antenna is >5cm. The location of the antennas inside EUT is shown in Annex I:



The output power of BT antenna is as following:

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz
GFSK(dBm)	0.15	0.47	1.92
EDR2M-4_DQPSK(dBm)	-0.21	0.07	1.52
EDR3M-8DPSK(dBm)	0.39	0.69	2.15

The output power of WIFI antenna is as following:

Mode	Channel	Data rate (Mbps)	AV Power (dBm)
11b	1	1	14.94
		2	14.89
		5.5	14.9
		11	14.71
	6	1	15.21
		2	15.19
		5.5	15.29
		11	15.07

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 47 of 250

	11	1	14.94
		2	14.92
		5.5	15.01
		11	14.81
11g	1	6	11.55
		9	11.46
		12	11.35
		18	11.17
		24	10.99
		36	10.69
		48	10.36
		54	10.21
	6	6	11.88
		9	11.77
		12	11.65
		18	11.43
		24	11.25
		36	10.97
		48	10.64
		54	10.5
	11	6	11.64
		9	11.52
		12	11.4
		18	11.16
		24	10.97
		36	10.66
		48	10.34
		54	10.25
11n HT20	1	MCS0	11.37
		MCS1	11.16
		MCS2	10.96
		MCS3	10.8
		MCS4	10.46
		MCS5	10.22

TA Technology (Shanghai) Co., Ltd.

Test Report

		MCS6	10.12	
		MCS7	9.95	
	6	MCS0	11.74	
		MCS1	11.45	
		MCS2	11.3	
		MCS3	11.08	
		MCS4	10.86	
		MCS5	10.53	
		MCS6	10.38	
		MCS7	10.29	
		11	MCS0	11.45
			MCS1	11.26
	MCS2		11.05	
	MCS3		10.89	
	MCS4		10.57	
	MCS5		10.29	
	MCS6		10.11	
	MCS7		10.08	

Note: 1. KDB 248227-SAR is not required for 802.11g/n channels when the maximum average output power is less than ¼ dB higher than measured on the corresponding 802.11b channels.

Output Power Thresholds for Unlicensed Transmitters

	2.45	5.15 - 5.35	5.47 - 5.85	GHz
P_{Ref}	12	6	5	mW
Device output power should be rounded to the nearest mW to compare with values specified in this table.				

Stand-alone SAR

According to the output power measurement result and the distance between BT/WIFI antenna and GSM/WCDMA antenna we can draw the conclusion that:

Stand-alone SAR are required for WIFI, because WIFI antenna is >5cm from other antennas and the output power of WIFI transmitter is >2P_{Ref}=13.8dBm

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 49 of 250

Table 21: SAR Values (802.11b)

Limit of SAR (W/kg)		10 g Average	1g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.21	
Different Test Position	Channel	Measurement Result(W/kg)		Power Drift (dB)	
		10 g Average	1g Average		
Test Position of Head					
Left hand, Touch cheek	High/11	0.228	0.443	-0.010	Figure 115
	Middle/6	0.256	0.501	-0.143	Figure 116
	Low/1	0.255	0.489	0.142	Figure 117
Left hand, Tilt 15 Degree	Middle/6	0.196	0.377	0.012	Figure 118
Right hand, Touch cheek	Middle/6	0.231	0.445	0.008	Figure 119
Right hand, Tilt 15 Degree	Middle/6	0.218	0.430	-0.026	Figure 120
Test position of Body (Distance 10mm)					
Back Side	High/11	0.106	0.184	0.098	Figure 121
	Middle/6	0.110	0.198	0.197	Figure 122
	Low/1	0.101	0.179	0.087	Figure 123
Front Side	Middle/6	0.061	0.110	0.087	Figure 124
Left Edge	N/A	N/A	N/A	N/A	N/A
Right Edge	Middle/6	0.051	0.096	0.020	Figure 125
Top Edge	Middle/6	0.093	0.168	0.089	Figure 126
Bottom Edge	N/A	N/A	N/A	N/A	N/A
Worst Case Position of Body with Earphone (Distance 10mm)					
Back Side	Middle/6	0.110	0.188	-0.021	Figure 127

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Upper and lower frequencies were measured at the worst position.
3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8W/kg), testing at the high and low channels is optional.
4. WLAN antenna is located at Right edge; antenna-to-Bottom/Left edge distance is more than 2.5 cm (see ANNEX I). Based upon KDB941225 D06, when the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
5. KDB 248227-SAR is not required for 802.11g/n channels when the maximum average output power is less than ¼ dB higher than measured on the corresponding 802.11b channels.

TA Technology (Shanghai) Co., Ltd.

Test Report

BT antenna is $>5\text{cm}$ from GSM/WCDMA antenna, stand-alone SAR are not required for BT, because the output power of BT transmitter is $\leq 2P_{\text{Ref}} = 13.8\text{dBm}$.

BT antenna is $<2.5\text{cm}$ from WIFI antenna, stand-alone SAR is not required for BT ,because the output power of BT transmitter is $\leq P_{\text{Ref}} = 10.8\text{dBm}$ and $\text{SAR}_{\text{MAX,WIFI}} \leq 1.2\text{W/Kg}$.

Simultaneous SAR

About BT and WIFI Antenna,

SAR _{1g} (W/kg)	WIFI (802.11b)	BT	MAX. ΣSAR_{1g}
Test Position			
Left hand, Touch cheek	0.501	0	0.501
Left hand, Tilt 15 Degree	0.377	0	0.377
Right hand, Touch cheek	0.445	0	0.445
Right hand, Tilt 15 Degree	0.430	0	0.430
Body, Back Side	0.198	0	0.198
Body, Front Side	0.110	0	0.110
Body, Left Edge	N/A	0	0
Body, Right Edge	0.096	0	0.096
Body, Top Edge	0.168	0	0.168
Body, Bottom Edge	N/A	0	0

Note: 1. The value with blue color is the maximum ΣSAR_{1g} Value.
 2. $\text{MAX. } \Sigma\text{SAR}_{1g} = \text{Unlicensed SAR}_{\text{MAX}} + \text{Licensed SAR}_{\text{MAX}}$
 3. Stand alone SAR for BT is not required. Its SAR is considered 0 in the 1-g SAR summing process to determine simultaneous transmission SAR evaluation requirements.

BT antenna is $<2.5\text{cm}$ from WIFI Antenna. $(\text{WIFI Antenna SAR}_{\text{MAX}})0.501 + (\text{BT Antenna SAR}_{\text{MAX}})0 = 0.501 < 1.6$, So the Simultaneous SAR are not required for BT and WIFI antenna.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 51 of 250

About WIFI and GSM/WCDMA Antenna,

SAR _{1g} (W/kg) Test Position	GSM 850	GSM 1900	WCDMA Band II	WCDMA Band IV	WCDMA Band V	WIFI (802.11b)	MAX. ΣSAR _{1g}
Left hand, Touch cheek	0.584	0.770	1.250	1.380	0.236	0.501	1.881
Left hand, Tilt 15 Degree	0.381	0.227	0.383	0.395	0.159	0.377	0.772
Right hand, Touch cheek	0.643	0.486	0.775	0.798	0.444	0.445	1.243
Right hand, Tilt 15 Degree	0.439	0.278	0.523	0.398	0.173	0.430	0.953
Body, Back Side	1.440	0.992	1.280	1.140	0.750	0.198	1.638
Body, Front Side	0.943	0.806	1.070	1.250	0.318	0.110	1.360
Body, Left Edge	0.612	0.310	0.344	0.363	0.206	N/A	0.612
Body, Right Edge	0.588	0.151	0.169	0.265	0.204	0.096	0.684
Body, Top Edge	N/A	N/A	N/A	N/A	N/A	0.168	0.168
Body, Bottom Edge	0.103	0.421	0.577	0.467	0.032	N/A	0.577

Note: 1. The value with blue color is the maximum ΣSAR_{1g} Value.

2. MAX. ΣSAR_{1g} = Unlicensed SAR_{MAX} + Licensed SAR_{MAX}


WIFI antenna is >5cm from GSM/WCDMA Antenna. (GSM/WCDMA Antenna SAR_{MAX})1.380+(WIFI Antenna SAR_{MAX})0.501 =1.881 > 1.6,

Ratio= (SAR1+SAR2)/Distance(cm)

The position SAR1 is (x=71.56, y=250.4), the position SAR2 is (x=30.01, y=326.1), so the distance between the SAR1 and SAR2 is 8.64cm. Thus [(SAR_{MAX.GSM/WCDMA}) 1.380 W/kg + (SAR_{MAX.WIFI}) 0.501W/kg] /Peak SAR Location Separation =1.881 /8.64=0.22<0.3

So the Simultaneous SAR are not required for WIFI and GSM/WCDMA antenna.

TA Technology (Shanghai) Co., Ltd. Test Report

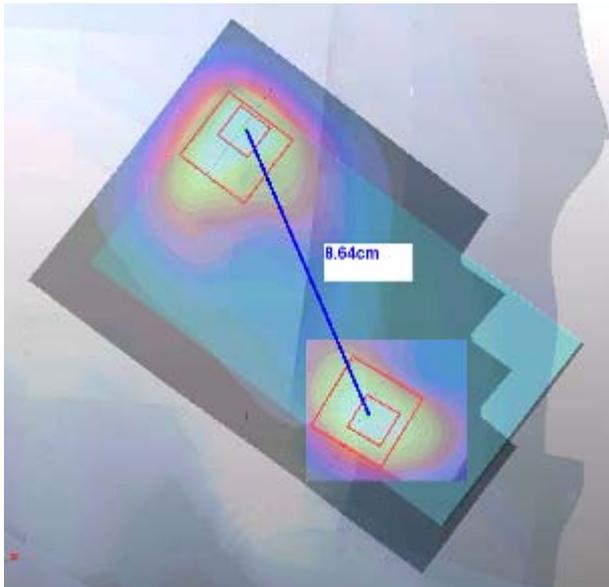


WIFI antenna is $>5\text{cm}$ from GSM/WCDMA Antenna. $(\text{GSM/WCDMA Antenna SAR}_{\text{MAX}})1.44+(\text{WIFI Antenna SAR}_{\text{MAX}})0.198 = 1.638 > 1.6$,

Ratio= $(\text{SAR}_3+\text{SAR}_4)/\text{Distance}(\text{cm})$

The position SAR3 is $(x= -1.7, y= -1.35)$, the position SAR4 is $(x=-4.1,y=4.65)$, so the distance between the SAR3 and SAR4 is 6.46cm. Thus $[(\text{SAR}_{\text{MAX.GSM/WCDMA}}) 1.44\text{W/kg} + (\text{SAR}_{\text{MAX.WIFI}}) 0.198\text{W/kg}] / \text{Peak SAR Location Separation} = 1.638 / 6.46 = 0.25 < 0.3$

So the Simultaneous SAR are not required for WIFI and GSM/WCDMA antenna.

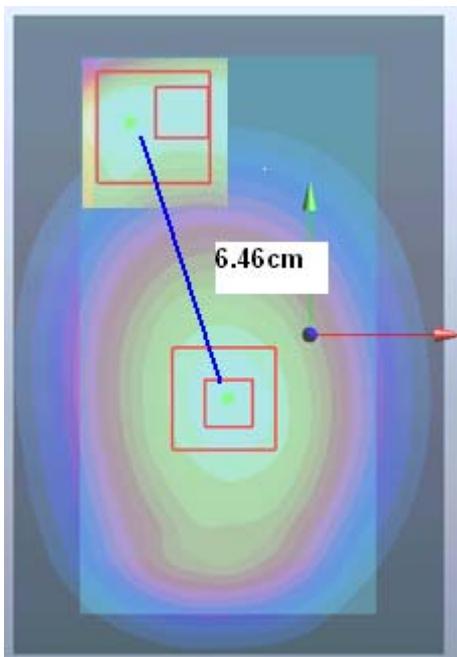

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 53 of 250

8. 300MHz to 3GHz Measurement Uncertainty

No.	source	Type	Uncertainty Value (%)	Probability Distribution	k	c _i	Standard uncertainty u _i (%)	Degree of freedom V _{eff} or V _i
1	System repetivity	A	0.5	N	1	1	0.5	9
Measurement system								
2	-probe calibration	B	6.0	N	1	1	6.0	∞
3	-axial isotropy of the probe	B	4.7	R	$\sqrt{3}$	$\sqrt{0.5}$	1.9	∞
4	- Hemispherical isotropy of the probe	B	9.4	R	$\sqrt{3}$	$\sqrt{0.5}$	3.9	∞
6	-boundary effect	B	1.9	R	$\sqrt{3}$	1	1.1	∞
7	-probe linearity	B	4.7	R	$\sqrt{3}$	1	2.7	∞
8	- System detection limits	B	1.0	R	$\sqrt{3}$	1	0.6	∞
9	-readout Electronics	B	1.0	N	1	1	1.0	∞
10	-response time	B	0	R	$\sqrt{3}$	1	0	∞
11	-integration time	B	4.32	R	$\sqrt{3}$	1	2.5	∞
12	-noise	B	0	R	$\sqrt{3}$	1	0	∞
13	-RF Ambient Conditions	B	3	R	$\sqrt{3}$	1	1.73	∞
14	-Probe Positioner Mechanical Tolerance	B	0.4	R	$\sqrt{3}$	1	0.2	∞
15	-Probe Positioning with respect to Phantom Shell	B	2.9	R	$\sqrt{3}$	1	1.7	∞
16	-Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	B	3.9	R	$\sqrt{3}$	1	2.3	∞
Test sample Related								
17	-Test Sample Positioning	A	2.9	N	1	1	2.9	71
18	-Device Holder Uncertainty	A	4.1	N	1	1	4.1	5
19	-Output Power Variation - SAR drift measurement	B	5.0	R	$\sqrt{3}$	1	2.9	∞
Physical parameter								
20	-phantom	B	4.0	R	$\sqrt{3}$	1	2.3	∞

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 54 of 250

21	-liquid conductivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.64	1.8	∞
22	-liquid conductivity (measurement uncertainty)	B	2.5	N	1	0.64	1.6	9
23	-liquid permittivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞
24	-liquid permittivity (measurement uncertainty)	B	2.5	N	1	0.6	1.5	9
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					11.50	
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$		N	k=2	23.00		

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 55 of 250

9. Main Test Instruments

Table 22: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	Agilent 8753E	US37390326	September 12, 2011	One year
02	Dielectric Probe Kit	Agilent 85070E	US44020115	No Calibration Requested	
03	Power meter	Agilent E4417A	GB41291714	March 11, 2012	One year
04	Power sensor	Agilent N8481H	MY50350004	September 25, 2011	One year
05	Power sensor	E9327A	US40441622	September 24, 2011	One year
06	Signal Generator	HP 8341B	2730A00804	September 12, 2011	One year
07	Dual directional coupler	778D-012	5051P	August 21, 2011	One year
08	Dual directional coupler	777D	50146	August 21, 2011	One year
09	Amplifier	IXA-020	0401	No Calibration Requested	
10	BTS	E5515C	MY48360988	December 2, 2011	One year
11	E-field Probe	EX3DV4	3816	October 3, 2011	One year
12	DAE	DAE4	871	November 22, 2011	One year
13	Validation Kit 835MHz	D835V2	4d020	August 26, 2011	Three years
14	Validation Kit 1750MHz	D1750V2	1033	May 17, 2010	Three years
15	Validation Kit 1900MHz	D1900V2	5d060	August 31, 2011	Three years
16	Validation Kit 2450MHz	D2450V2	786	August 29, 2011	Three years
17	Temperature Probe	JM222	AA1009129	March 15, 2012	One year
18	Hygrothermograph	WS-1	64591	September 28, 2011	One year

*****END OF REPORT *****


ANNEX A: Test Layout



Picture 1: Specific Absorption Rate Test Layout




Picture 2: Liquid depth in the flat Phantom (835MHz, 15.4cm depth)

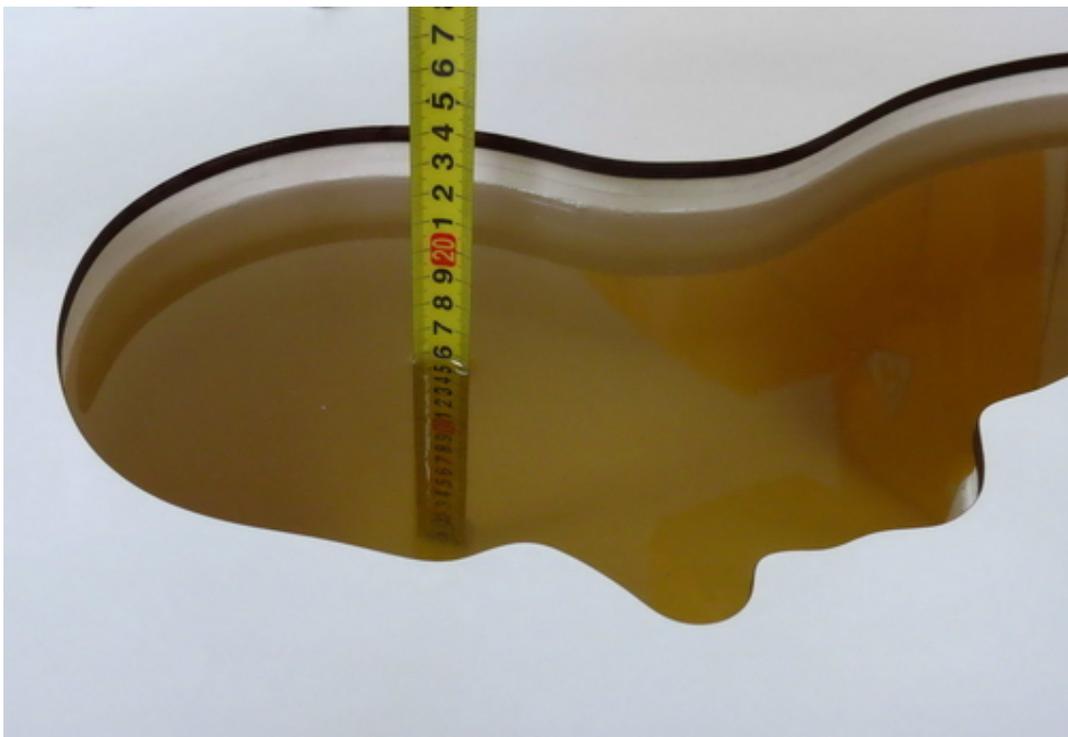

Picture 3: Liquid depth in the head Phantom (835MHz, 15.3cm depth)




Picture 4: liquid depth in the head Phantom (1750 MHz, 15.2cm depth)

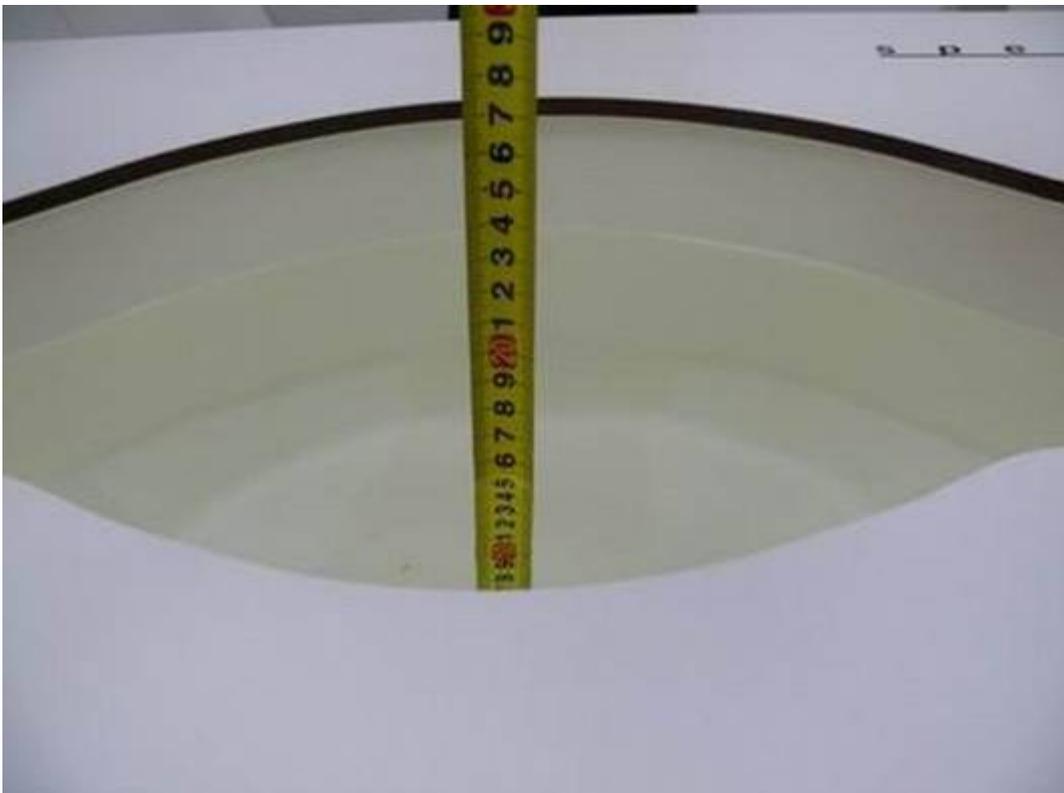

Picture 5: Liquid depth in the Flat Phantom (1750 MHz, 15.3cm depth)




Picture 6: liquid depth in the head Phantom (1900 MHz, 15.3cm depth)

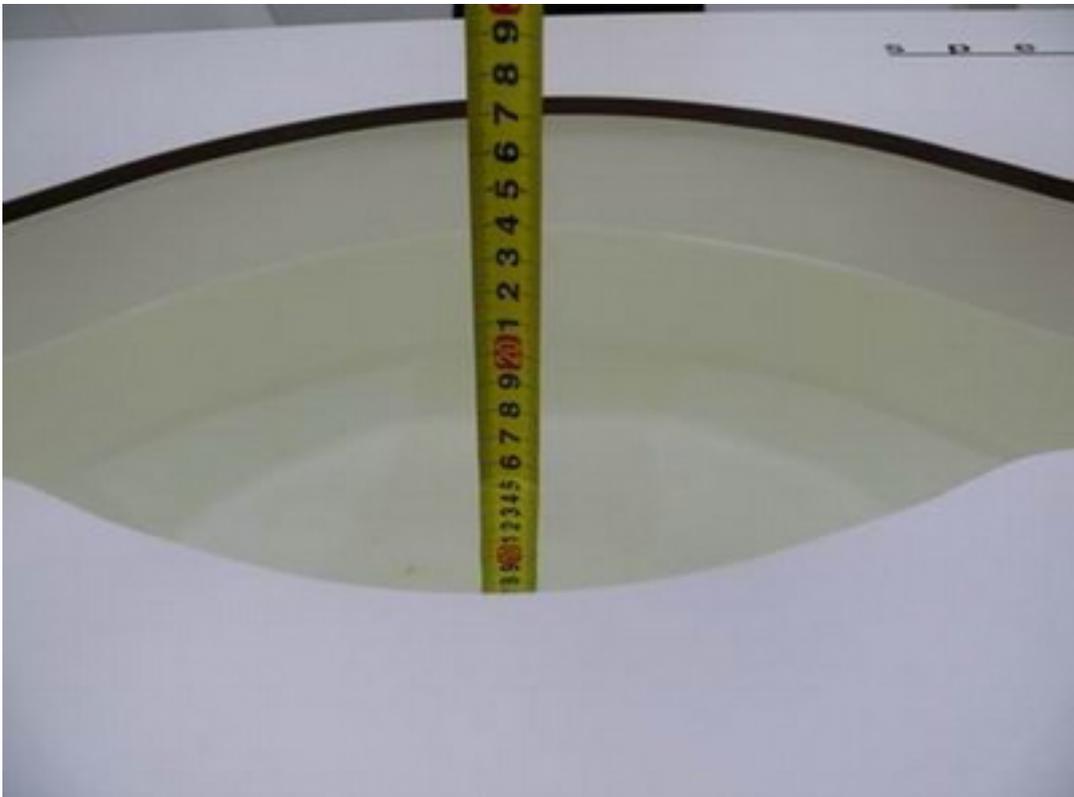

Picture 7: Liquid depth in the flat Phantom (1900 MHz, 15.2cm depth)



Picture 8: Liquid depth in the head Phantom (2450 MHz, 15.4cm depth)

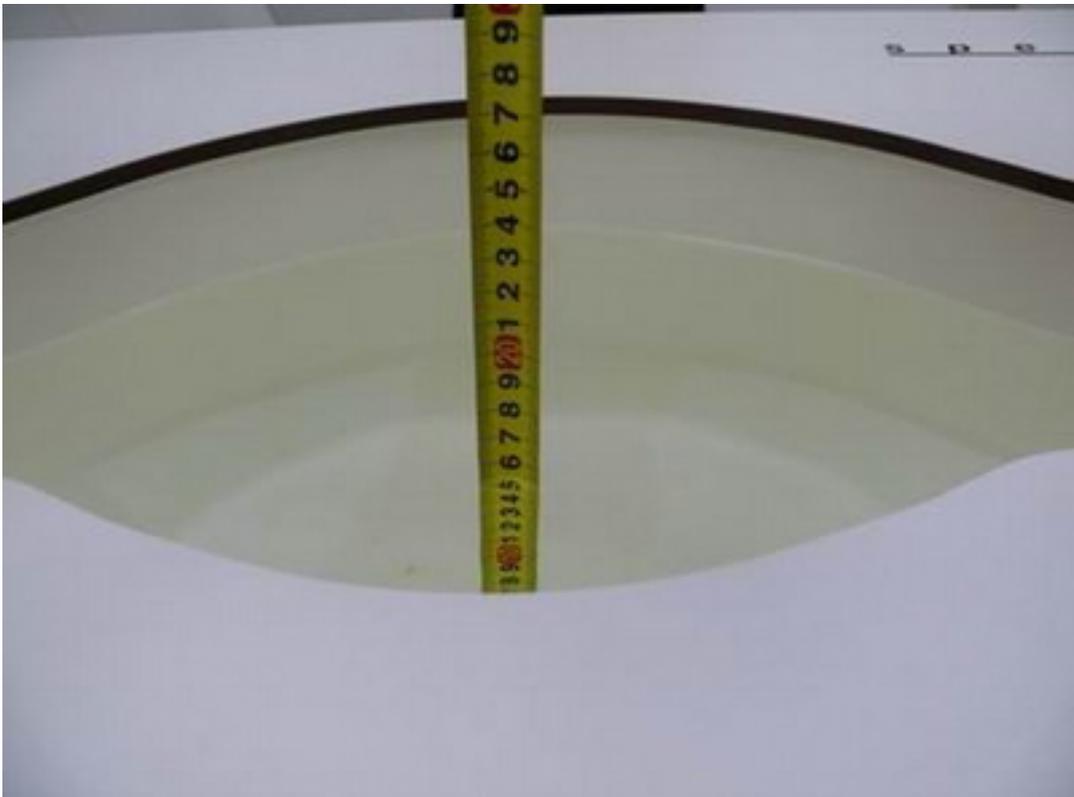

Picture 9: Liquid depth in the flat Phantom (2450 MHz, 15.3cm depth)

ANNEX B: System Check Results

System Performance Check at 835 MHz Head TSL

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d020

Date/Time: 6/10/2012 6:58:18 PM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.899 \text{ mho/m}$; $\epsilon_r = 41.4$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: $22.3 \text{ }^\circ\text{C}$ Liquid Temperature: $21.5 \text{ }^\circ\text{C}$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.22, 9.22, 9.22); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

d=15mm, Pin=250mW/Area Scan (41x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.66 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.7 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 3.79 W/kg

SAR(1 g) = 2.52 mW/g; SAR(10 g) = 1.65 mW/g

Maximum value of SAR (measured) = 2.71 mW/g

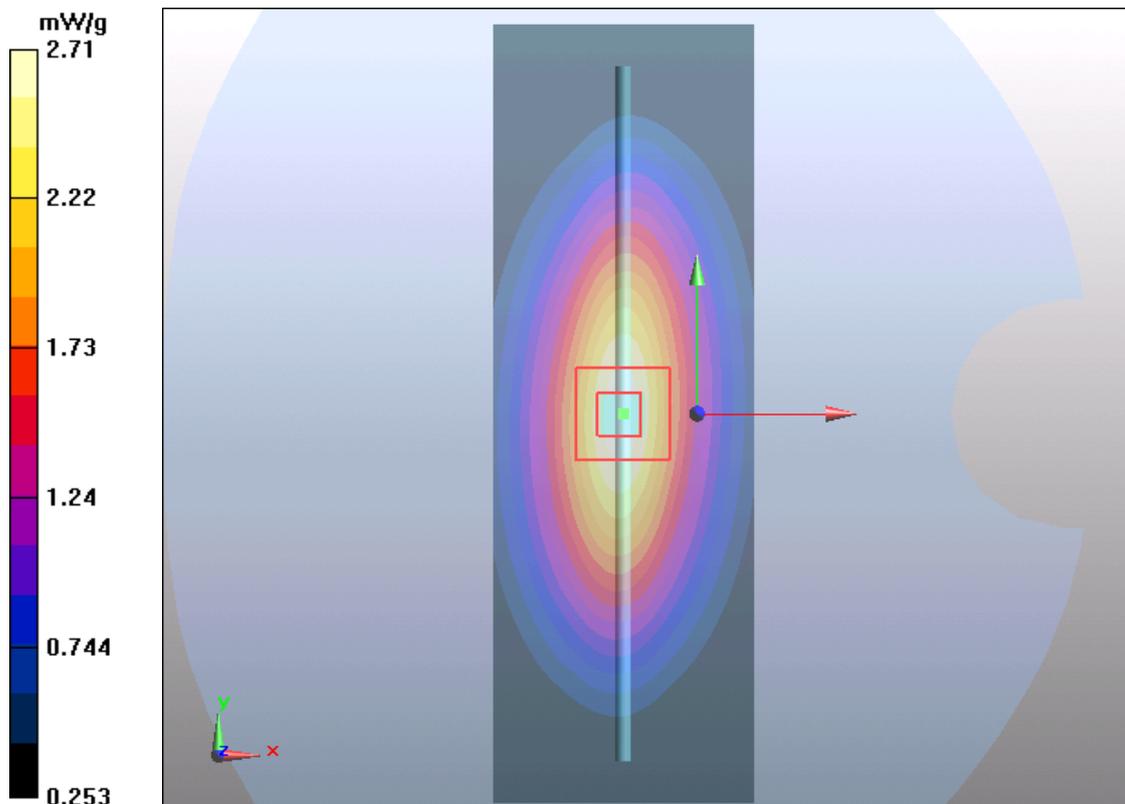


Figure 7 System Performance Check 835MHz 250mW

System Performance Check at 835 MHz Body TSL

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d020

Date/Time: 6/8/2012 8:54:26 PM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.951 \text{ mho/m}$; $\epsilon_r = 54.4$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: $22.3 \text{ }^\circ\text{C}$ Liquid Temperature: $21.5 \text{ }^\circ\text{C}$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.38, 9.38, 9.38); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

835 MHz Dipole/Area Scan (41x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.68 mW/g

835 MHz Dipole/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.3 V/m ; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.48 mW/g ; SAR(10 g) = 1.64 mW/g

Maximum value of SAR (measured) = 2.67 mW/g

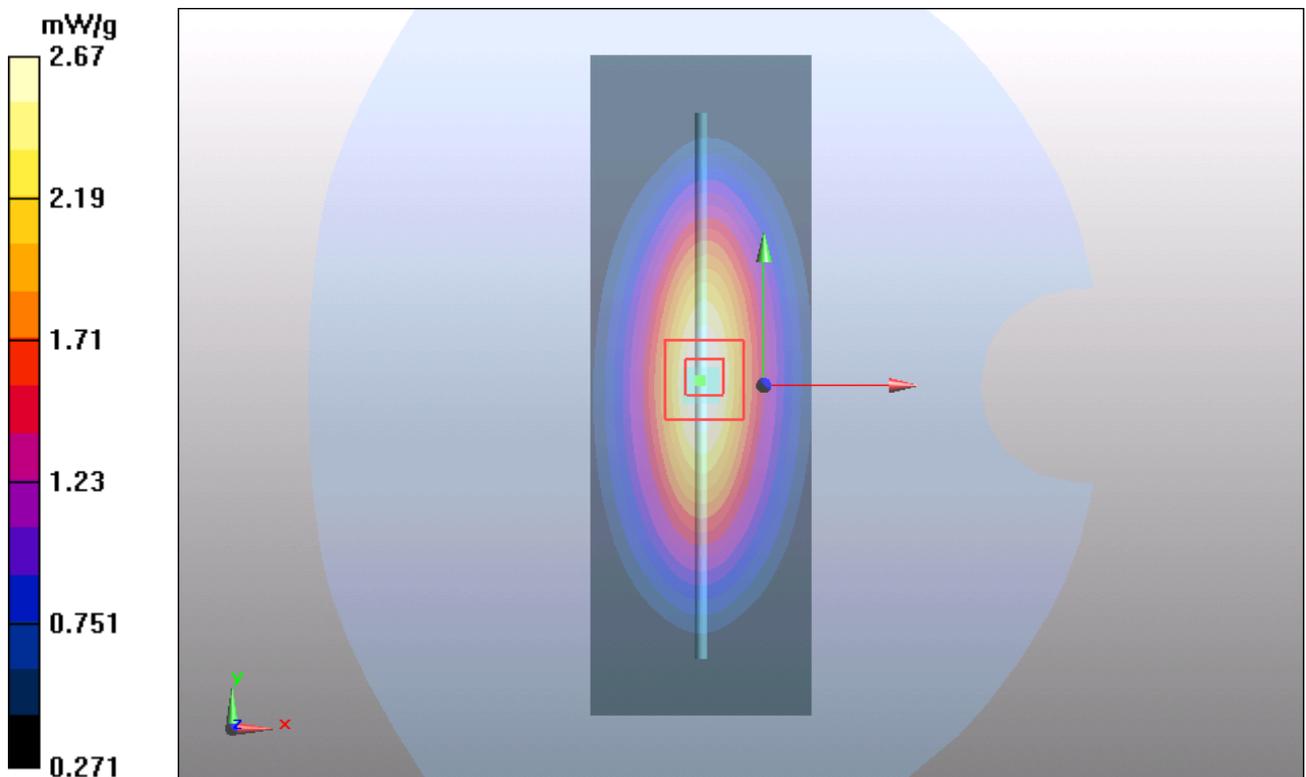


Figure 8 System Performance Check 835MHz 250mW

System Performance Check at 1750 MHz Head TSL

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1033

Date/Time: 4/10/2012 8:00:30 AM

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 40.04$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.7 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(8.23, 8.23, 8.23) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

d=10mm, Pin=250mW/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 9.96 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 78.7 V/m; Power Drift = 0.084 dB

Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 8.79 mW/g; SAR(10 g) = 4.58 mW/g

Maximum value of SAR (measured) = 9.83 mW/g

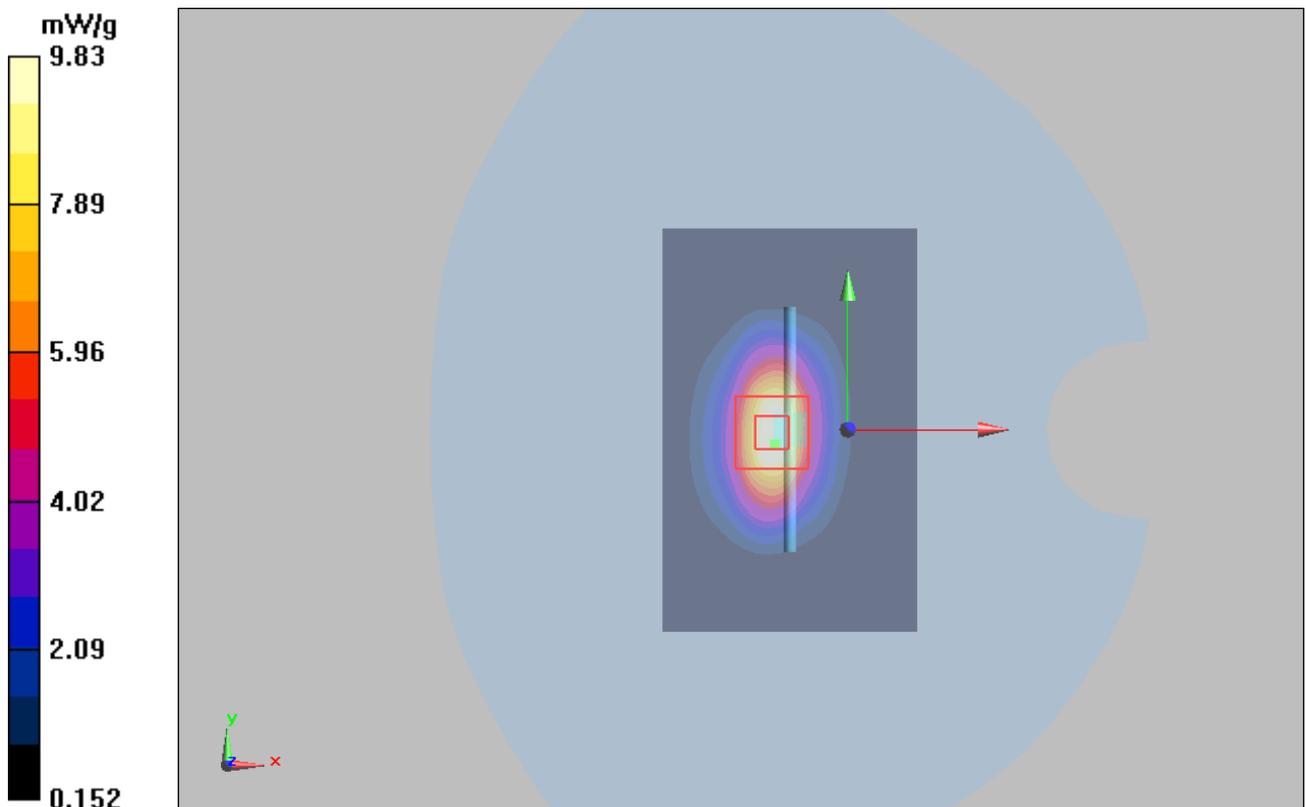


Figure 9 System Performance Check 1750MHz 250mW

System Performance Check at 1750 MHz Body TSL

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1033

Date/Time: 4/11/2012 7:58:55 AM

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.50$ mho/m; $\epsilon_r = 53.43$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.7 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.80, 7.80, 7.80) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

d=10mm, Pin=250mW/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 10.6 mW/g

d=10mm, Pin=250mW/Area Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 77.7 V/m; Power Drift = 0.097 dB

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 9.24 mW/g; SAR(10 g) = 4.9 mW/g

Maximum value of SAR (measured) = 10.3 mW/g

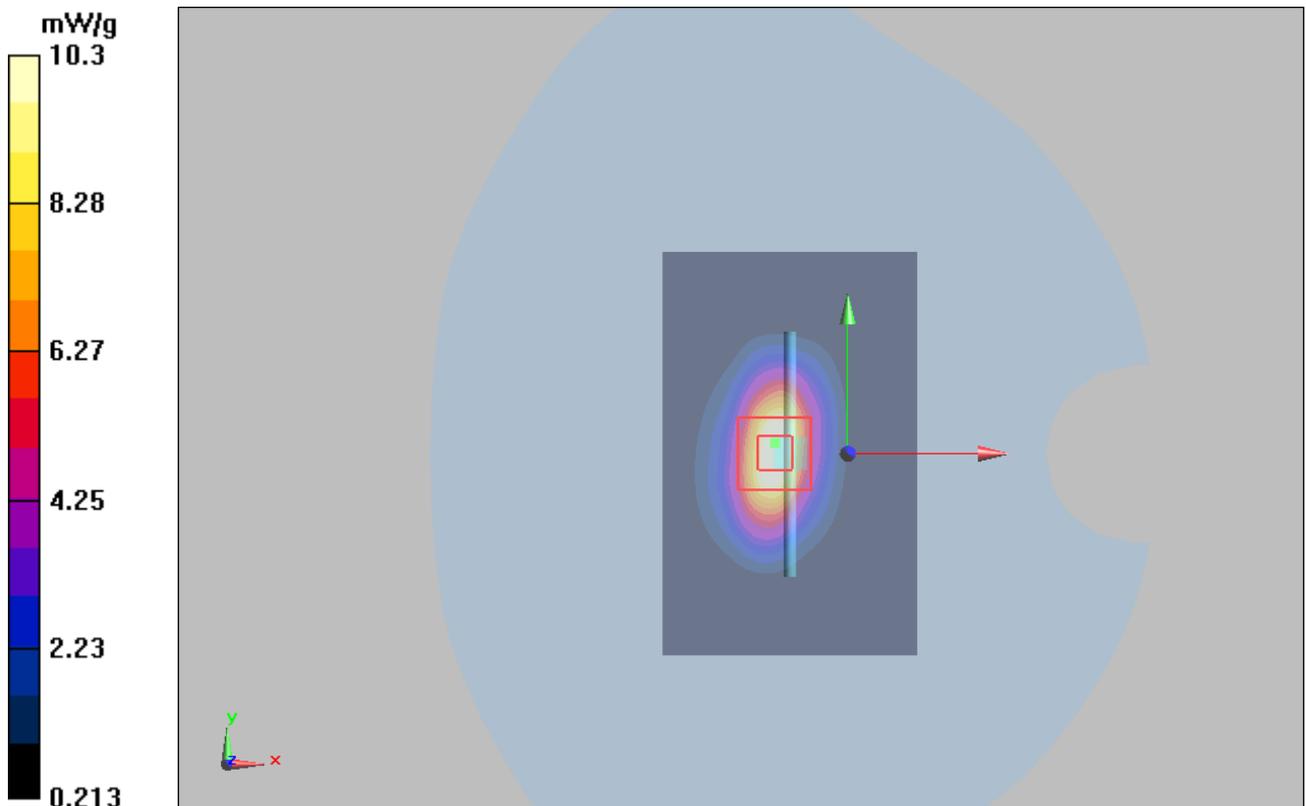


Figure 10 System Performance Check 1750MHz 250mW

System Performance Check at 1900 MHz Head TSL

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d060

Date/Time: 4/10/2012 6:31:34 AM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.82$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.8 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.90, 7.90, 7.90) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

d=10mm, Pin=250mW/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.7 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 81.0 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 18.9 W/kg

SAR(1 g) = 10.33 mW/g; SAR(10 g) = 5.30 mW/g

Maximum value of SAR (measured) = 11.53 mW/g

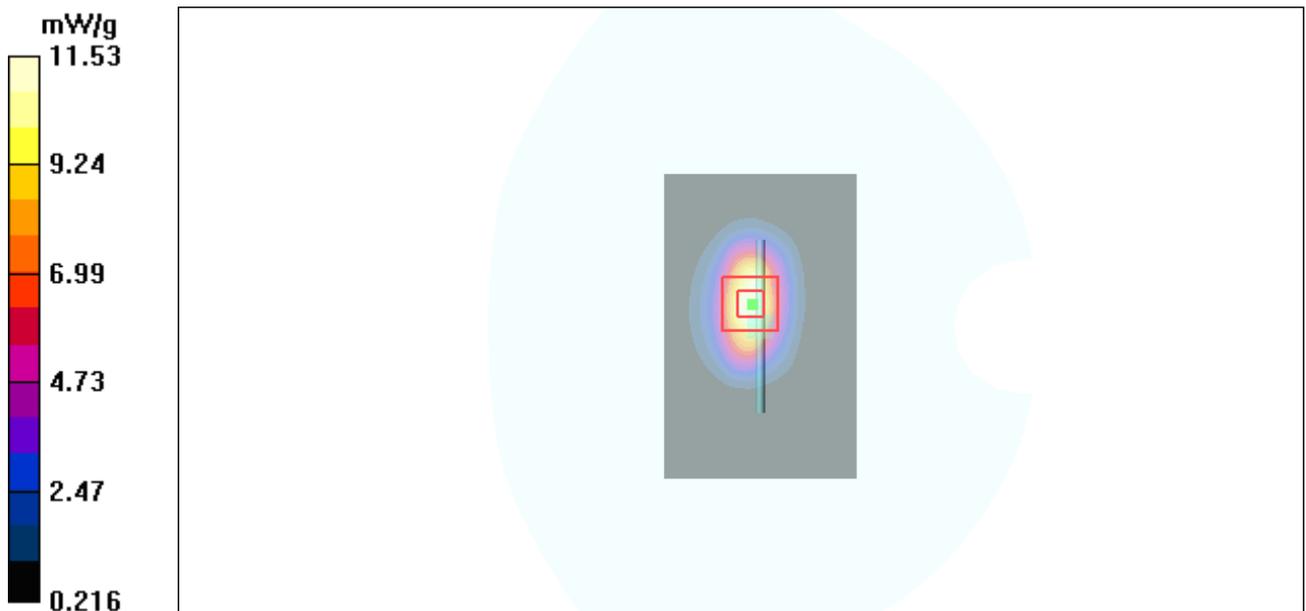


Figure 11 System Performance Check 1900MHz 250mW

System Performance Check at 1900 MHz Body TSL

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d060

Date/Time: 4/11/2012 9:30:19 AM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.14$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.8 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

d=10mm, Pin=250mW/Area Scan (41x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.9 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 80.8 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 17.6 W/kg

SAR(1 g) = 10.20 mW/g; SAR(10 g) = 5.36 mW/g

Maximum value of SAR (measured) = 11.05 mW/g

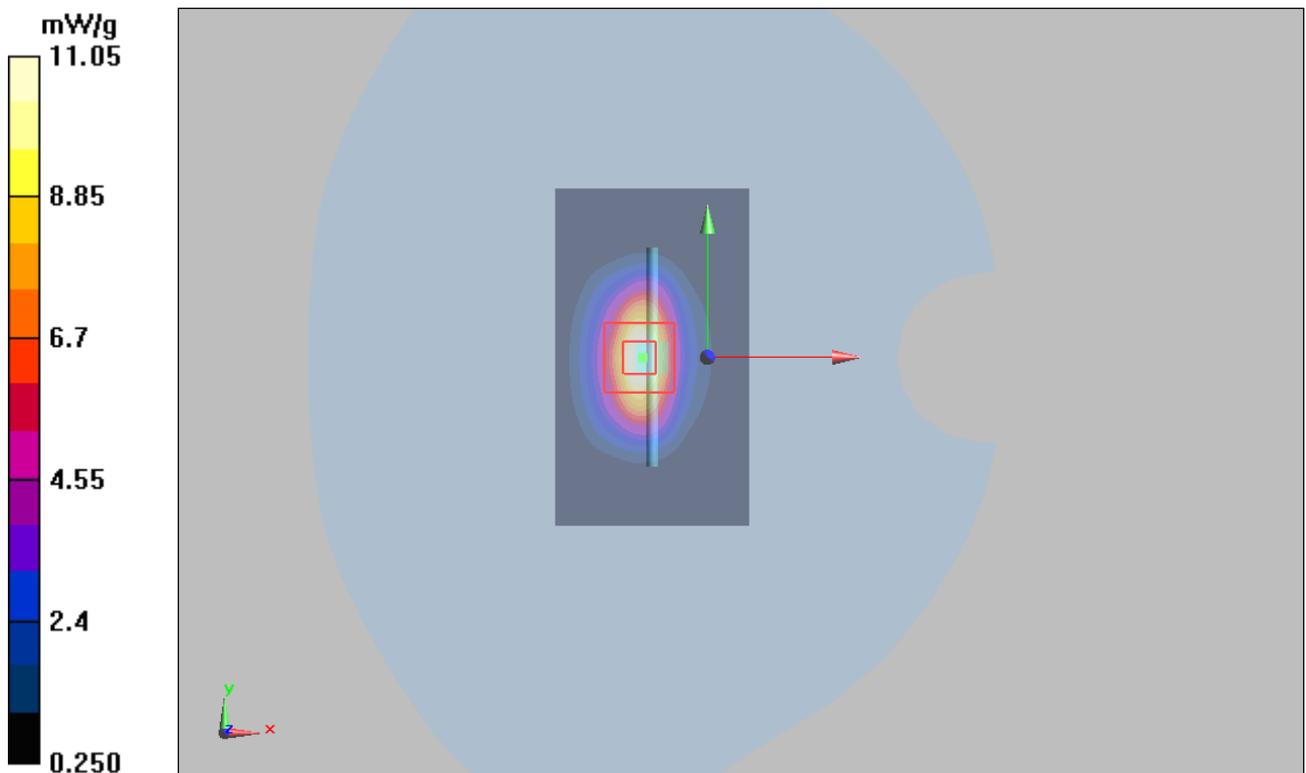


Figure 12 System Performance Check 1900MHz 250mW

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1203-0414SAR01R2

Page 67 of 250

System Performance Check at 1900 MHz Head TSL

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d060

Date/Time: 6/11/2012 10:09:15 AM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.9, 7.9, 7.9); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

1900 MHz Dipole/Area Scan (41x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.3 mW/g

1900 MHz Dipole/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 84.3 V/m; Power Drift = 0.117 dB

Peak SAR (extrapolated) = 18.9 W/kg

SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.22 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

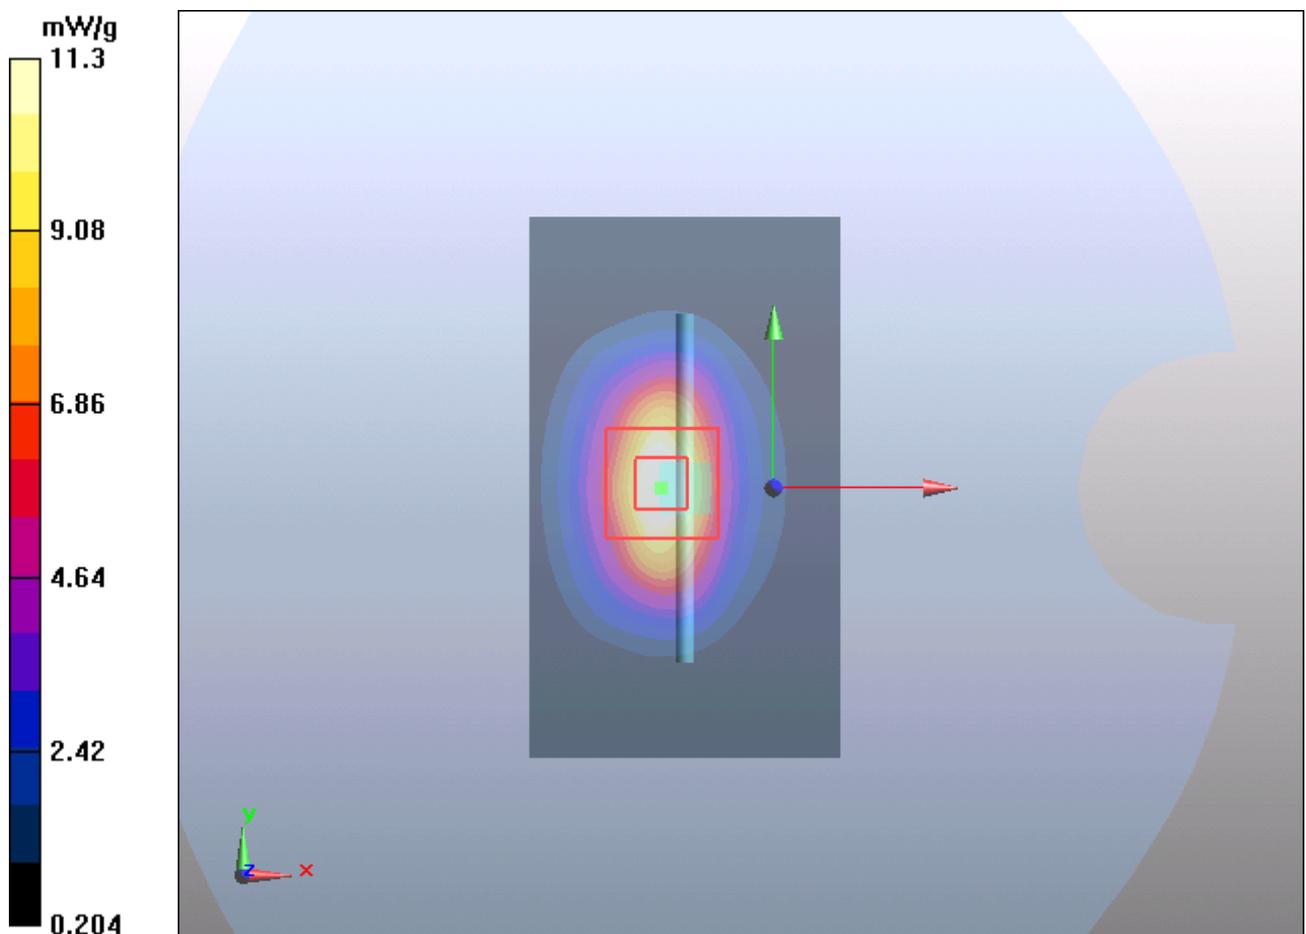


Figure 13 System Performance Check 1900MHz 250mW

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1203-0414SAR01R2

Page 68 of 250

System Performance Check at 1900 MHz Body TSL

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d060

Date/Time: 6/9/2012 6:12:51 PM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

d=10mm, Pin=250mW/Area Scan (41x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.5 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 83.4 V/m; Power Drift = 0.173 dB

Peak SAR (extrapolated) = 18.6 W/kg

SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.28 mW/g

Maximum value of SAR (measured) = 11.4 mW/g

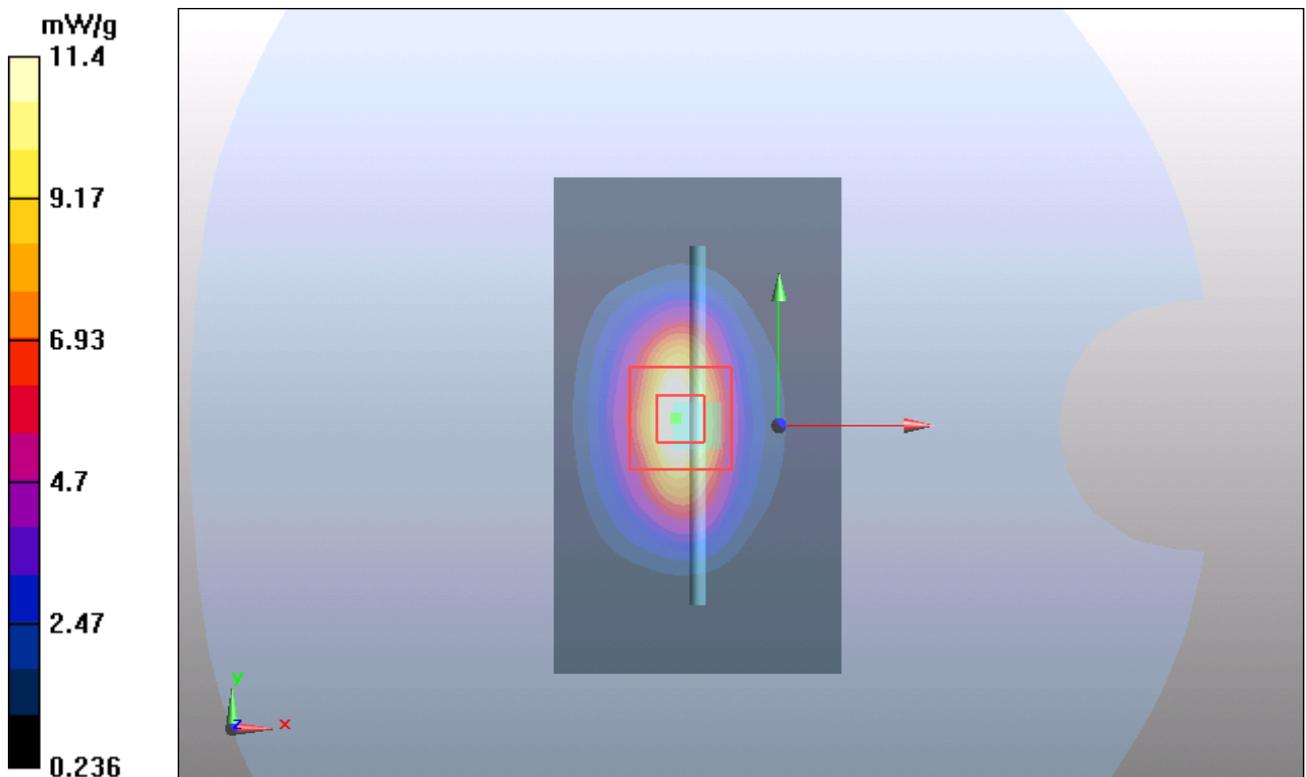


Figure 14 System Performance Check 1900MHz 250mW

System Performance Check at 2450 MHz Head TSL

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 786

Date/Time: 4/12/2012 8:15:36 AM

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 38.32$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.8 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.17, 7.17, 7.17) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

d=10mm, Pin=250mW/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 21.4 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 67.0 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 28.0 W/kg

SAR(1 g) = 14.06 mW/g; SAR(10 g) = 6.52 mW/g

Maximum value of SAR (measured) = 15.68 mW/g

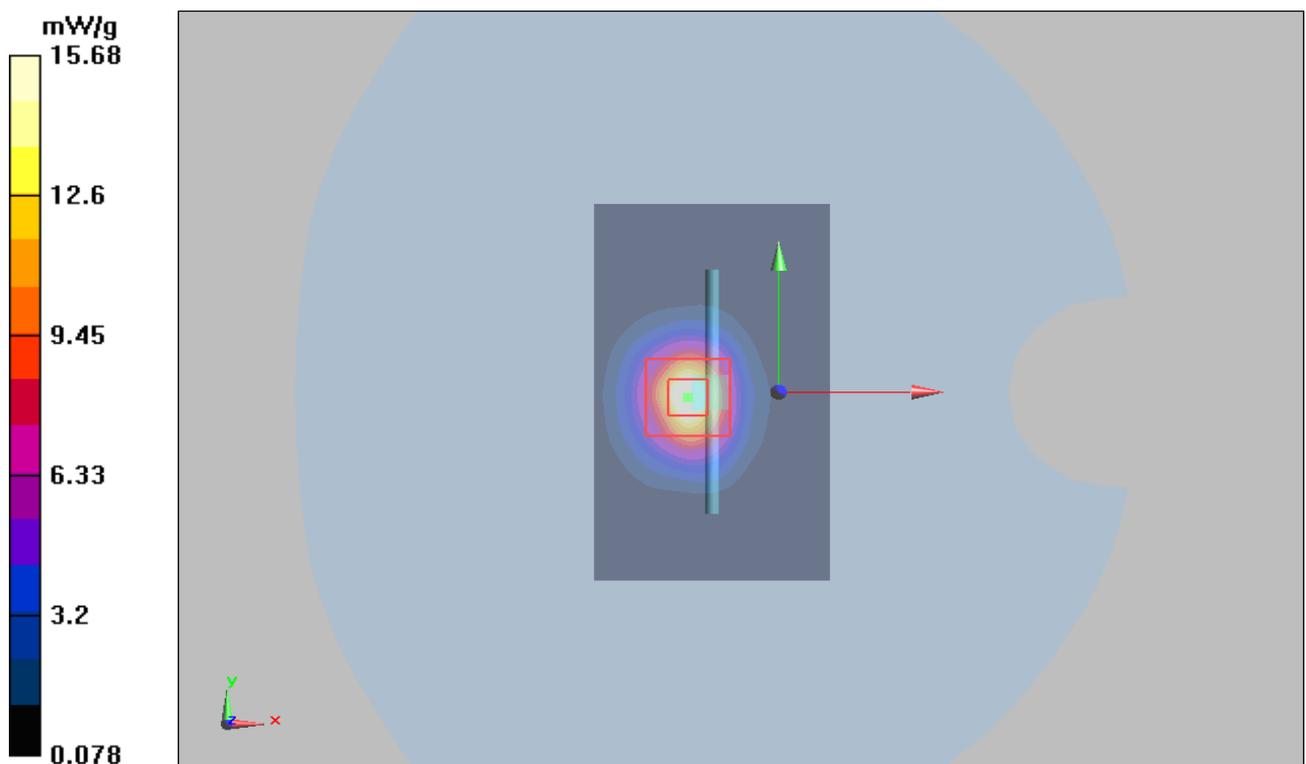


Figure 15 System Performance Check 2450MHz 250mW

System Performance Check at 2450 MHz Body TSL

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 786

Date/Time: 4/12/2012 6:37:36 AM

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.90$ mho/m; $\epsilon_r = 51.69$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.9 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.19, 7.19, 7.19) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

d=10mm, Pin=250mW/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 21.5 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 71.0 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 28.2 W/kg

SAR(1 g) = 14.01 mW/g; SAR(10 g) = 6.48 mW/g

Maximum value of SAR (measured) = 19.82 mW/g

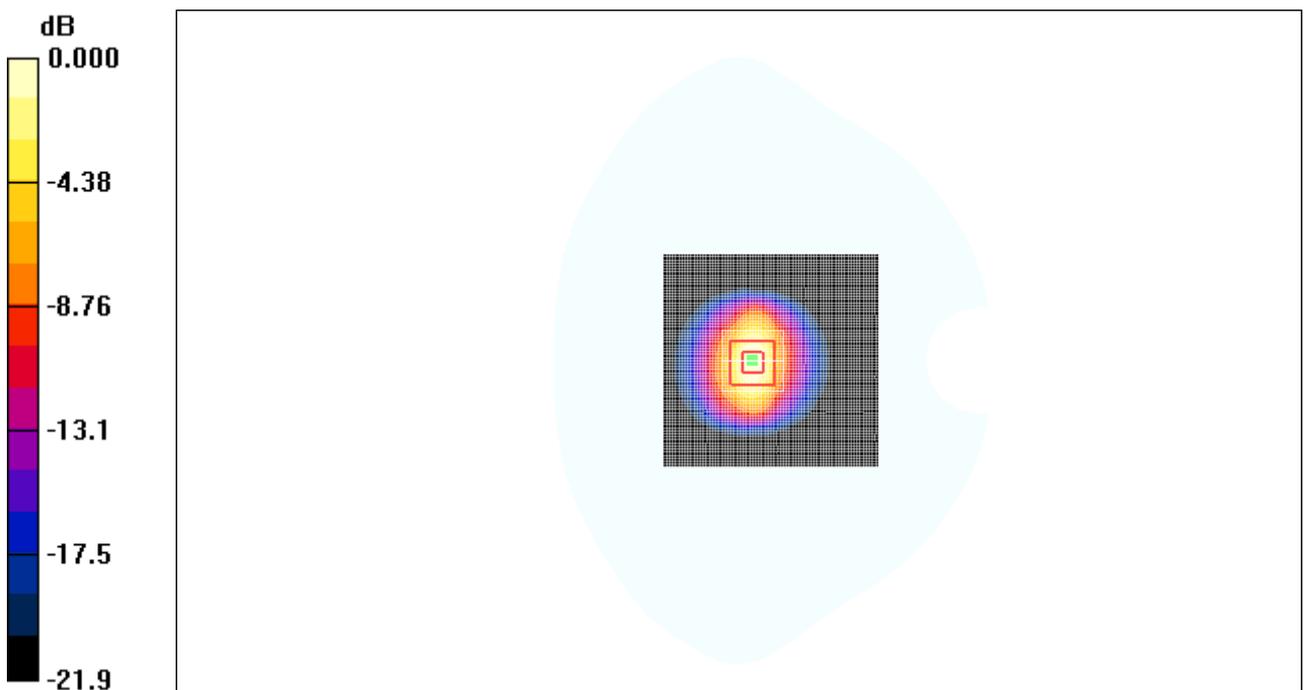

0 dB = 19.82mW/g

Figure 16 System Performance Check 2450MHz 250mW

ANNEX C: Graph Results

GSM 850 Left Cheek Middle

Date/Time: 6/10/2012 11:07:05 PM

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.22, 9.22, 9.22); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.618 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.32 V/m; Power Drift = 0.068 dB

Peak SAR (extrapolated) = 0.745 W/kg

SAR(1 g) = 0.584 mW/g; SAR(10 g) = 0.437 mW/g

Maximum value of SAR (measured) = 0.618 mW/g

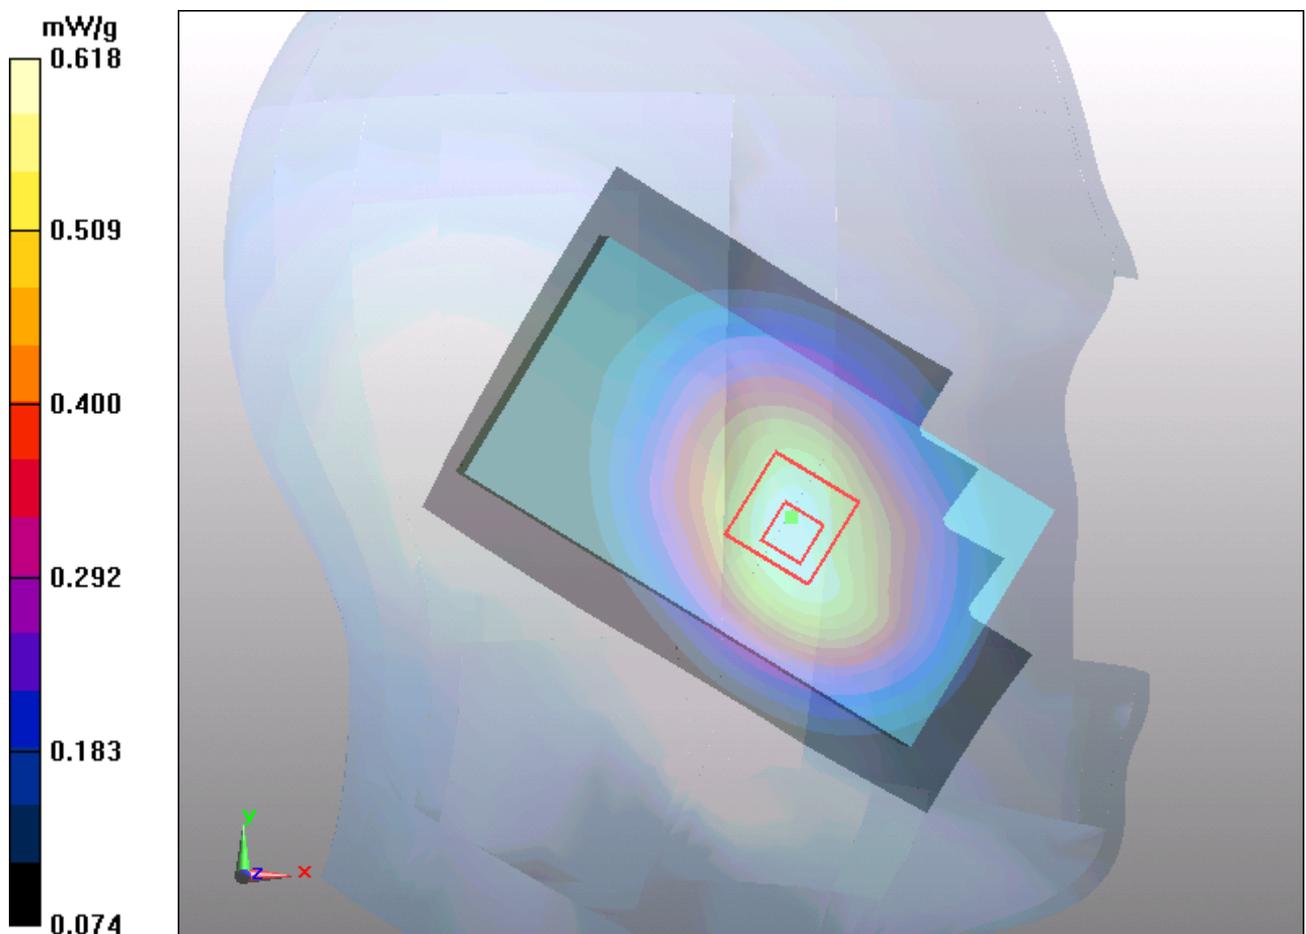


Figure 17 Left Hand Touch Cheek GSM 850 Channel 190

GSM 850 Left Tilt Middle

Date/Time: 6/10/2012 11:24:10 PM

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.22, 9.22, 9.22); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.397 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.3 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.381 mW/g; SAR(10 g) = 0.290 mW/g

Maximum value of SAR (measured) = 0.402 mW/g

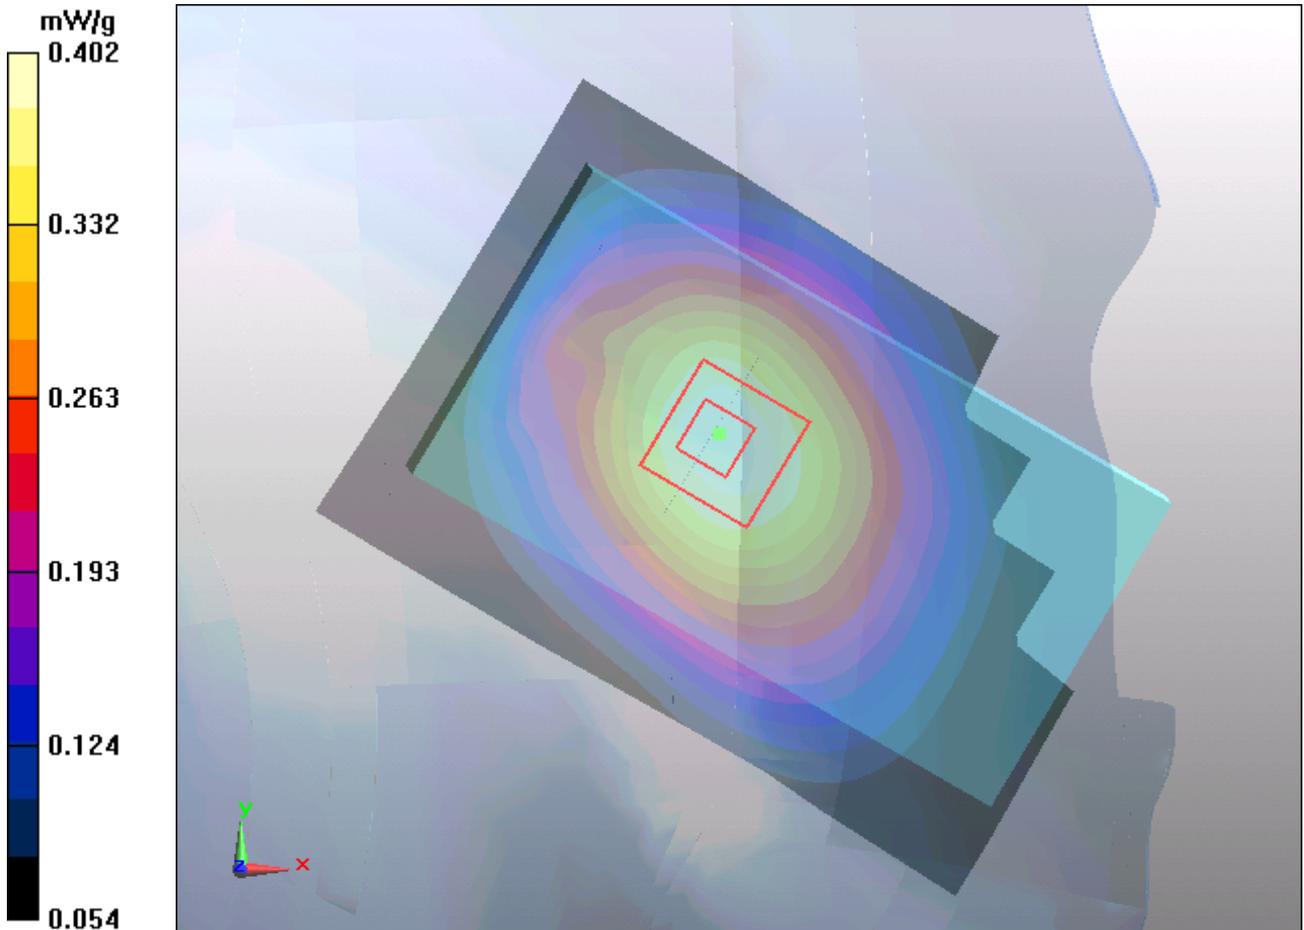


Figure 18 Left Hand Tilt 15° GSM 850 Channel 190

GSM 850 Right Cheek High

Date/Time: 6/10/2012 10:17:21 PM

Communication System: GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 849$ MHz; $\sigma = 0.913$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.22, 9.22, 9.22); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Cheek High/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.610 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.63 V/m; Power Drift = 0.126 dB

Peak SAR (extrapolated) = 0.714 W/kg

SAR(1 g) = 0.584 mW/g; SAR(10 g) = 0.444 mW/g

Maximum value of SAR (measured) = 0.620 mW/g

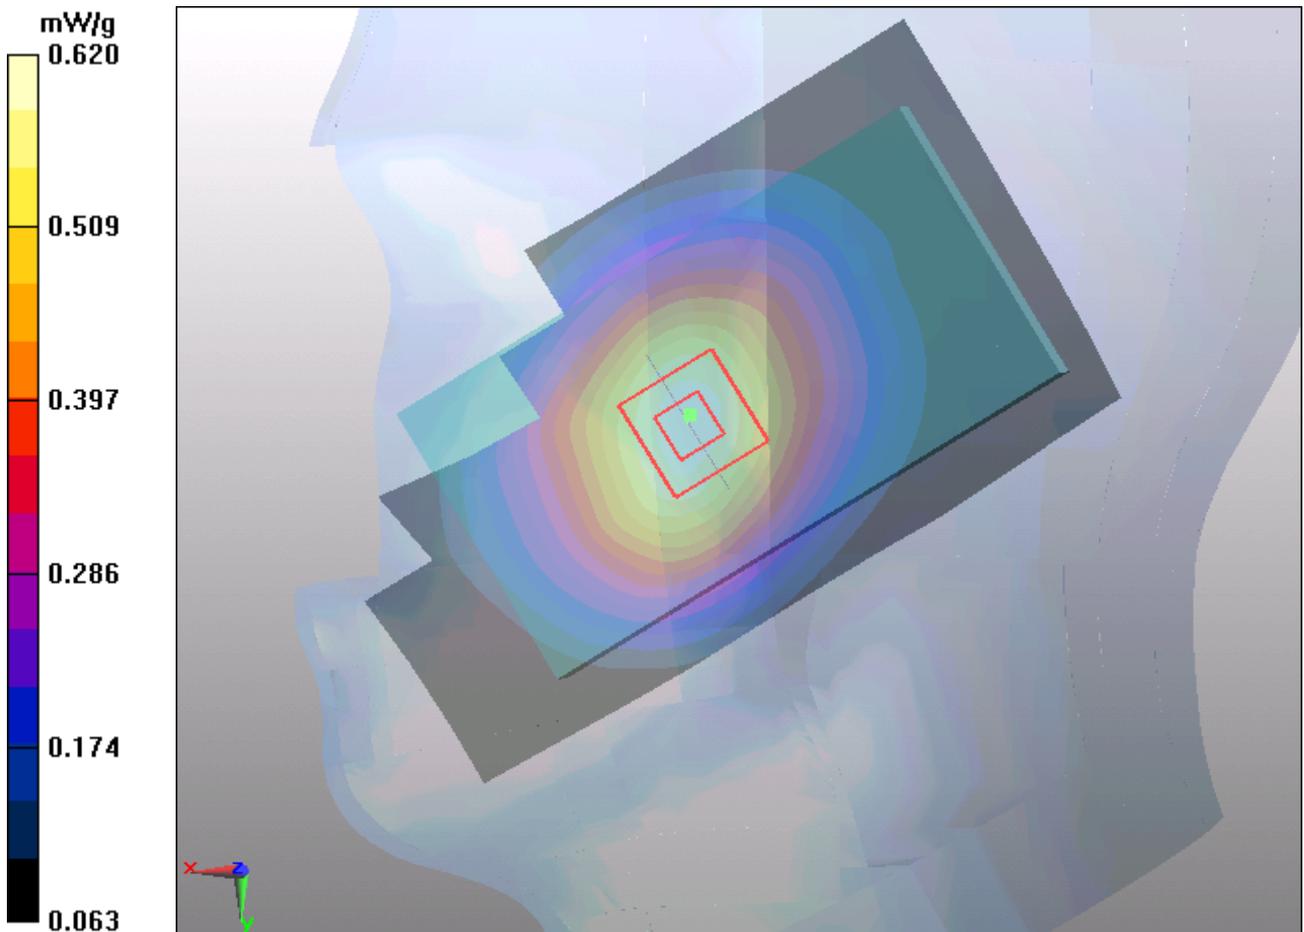


Figure 19 Right Hand Touch Cheek GSM 850 Channel 251

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1203-0414SAR01R2

Page 74 of 250

GSM 850 Right Cheek Middle

Date/Time: 6/10/2012 10:01:05 PM

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.22, 9.22, 9.22); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Cheek Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.665 mW/g


Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.25 V/m; Power Drift = 0.052 dB

Peak SAR (extrapolated) = 0.786 W/kg

SAR(1 g) = 0.643 mW/g; SAR(10 g) = 0.488 mW/g

Maximum value of SAR (measured) = 0.681 mW/g

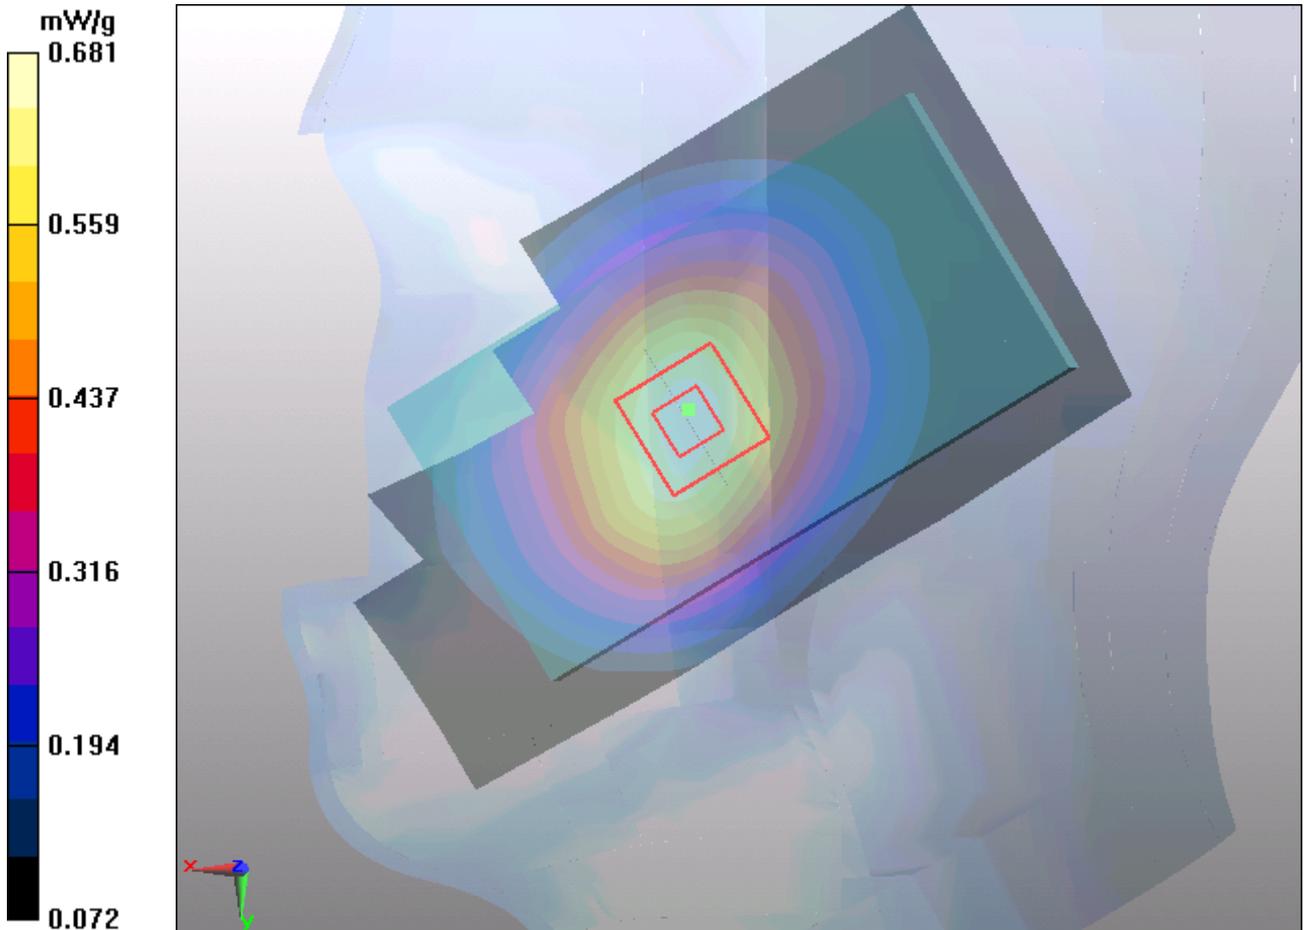

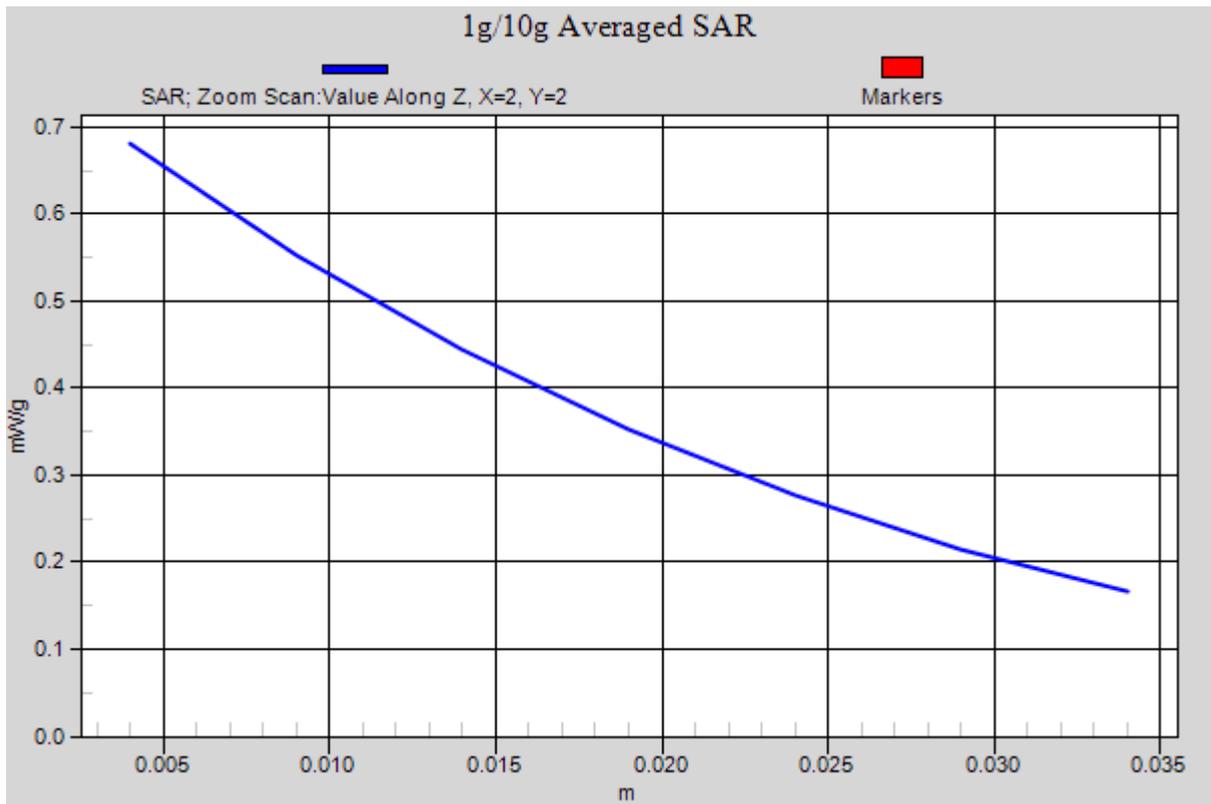


Figure 20 Right Hand Touch Cheek GSM 850 Channel 190

GSM 850 Right Cheek Low

Date/Time: 6/10/2012 10:33:17 PM

Communication System: GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.22, 9.22, 9.22); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Cheek Low/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.544 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.47 V/m; Power Drift = 0.051 dB

Peak SAR (extrapolated) = 0.632 W/kg

SAR(1 g) = 0.520 mW/g; SAR(10 g) = 0.396 mW/g

Maximum value of SAR (measured) = 0.547 mW/g

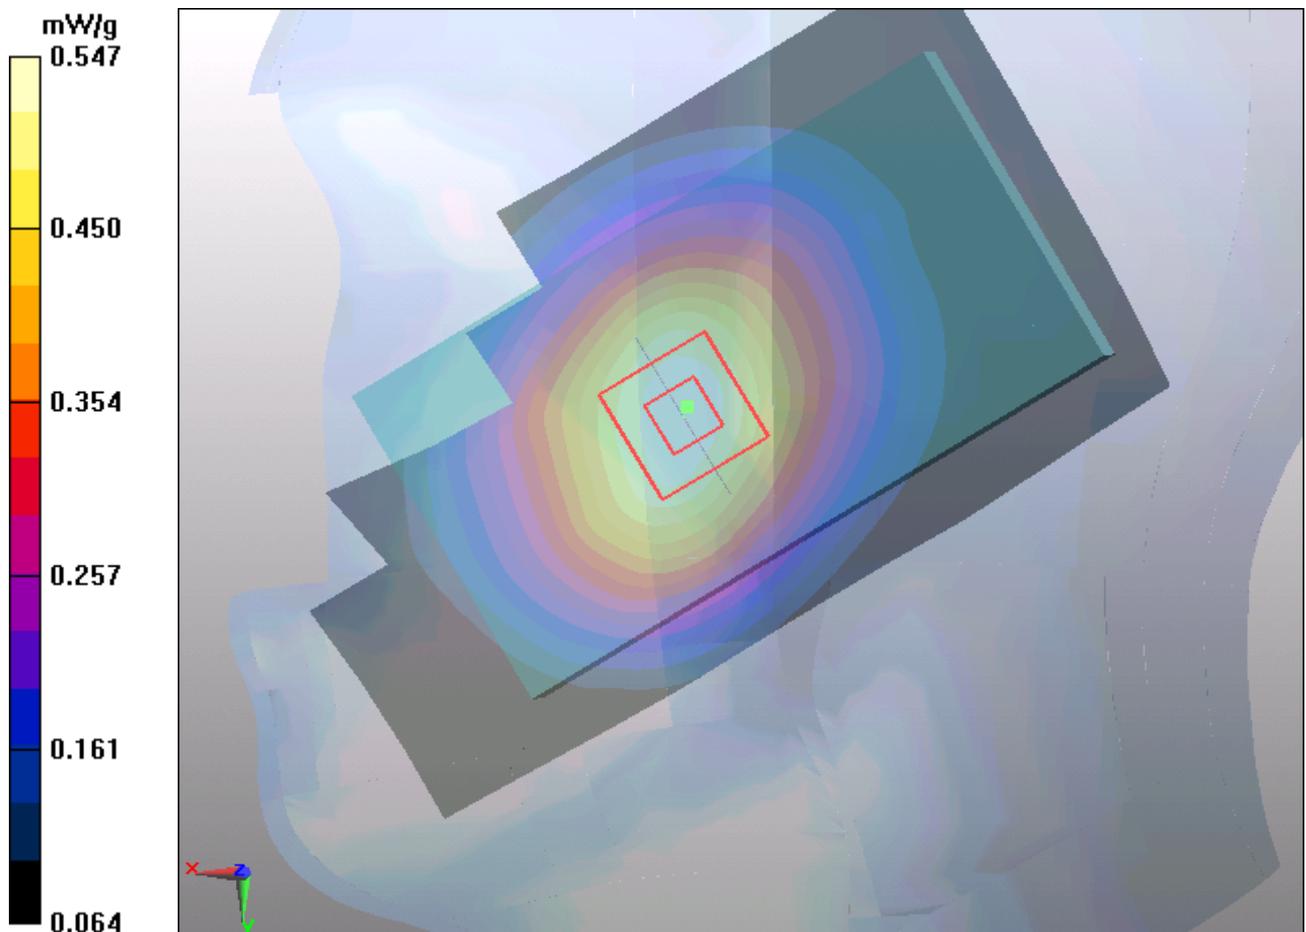


Figure 21 Right Hand Touch Cheek GSM 850 Channel 128

GSM 850 Right Tilt Middle

Date/Time: 6/10/2012 10:50:05 PM

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.22, 9.22, 9.22); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Tilt Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.459 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.6 V/m; Power Drift = 0.065 dB

Peak SAR (extrapolated) = 0.550 W/kg

SAR(1 g) = 0.439 mW/g; SAR(10 g) = 0.336 mW/g

Maximum value of SAR (measured) = 0.457 mW/g

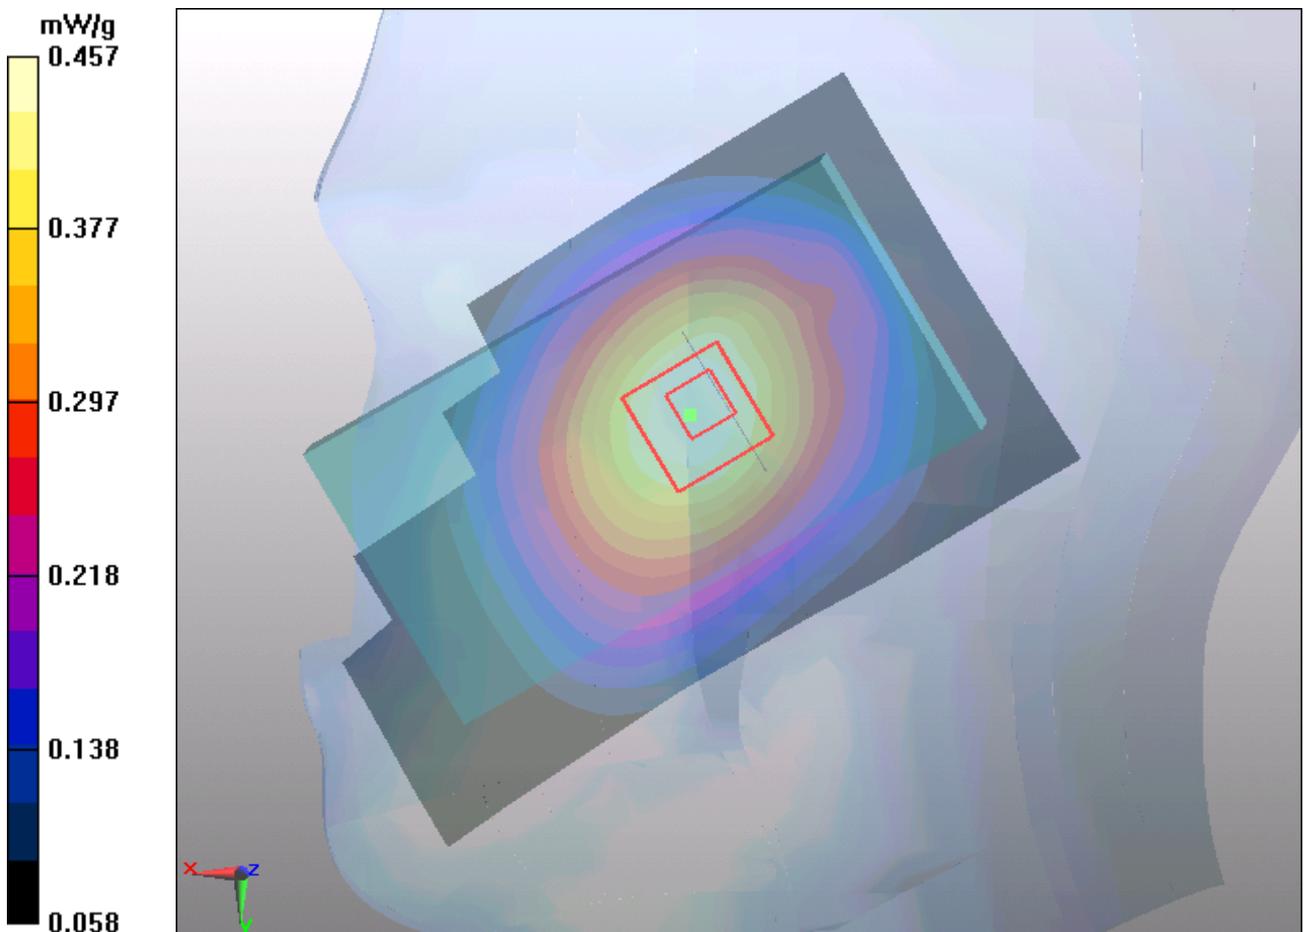


Figure 22 Right Hand Tilt 15° GSM 850 Channel 190

GSM 850 GPRS (1Txslot) Back Side High

Date/Time: 6/9/2012 4:25:55 PM

Communication System: GPRS 1TX; Frequency: 846.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 847$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.38, 9.38, 9.38); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.824 mW/g

Back Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.4 V/m; Power Drift = 0.052 dB

Peak SAR (extrapolated) = 1 W/kg

SAR(1 g) = 0.783 mW/g; SAR(10 g) = 0.581 mW/g

Maximum value of SAR (measured) = 0.821 mW/g

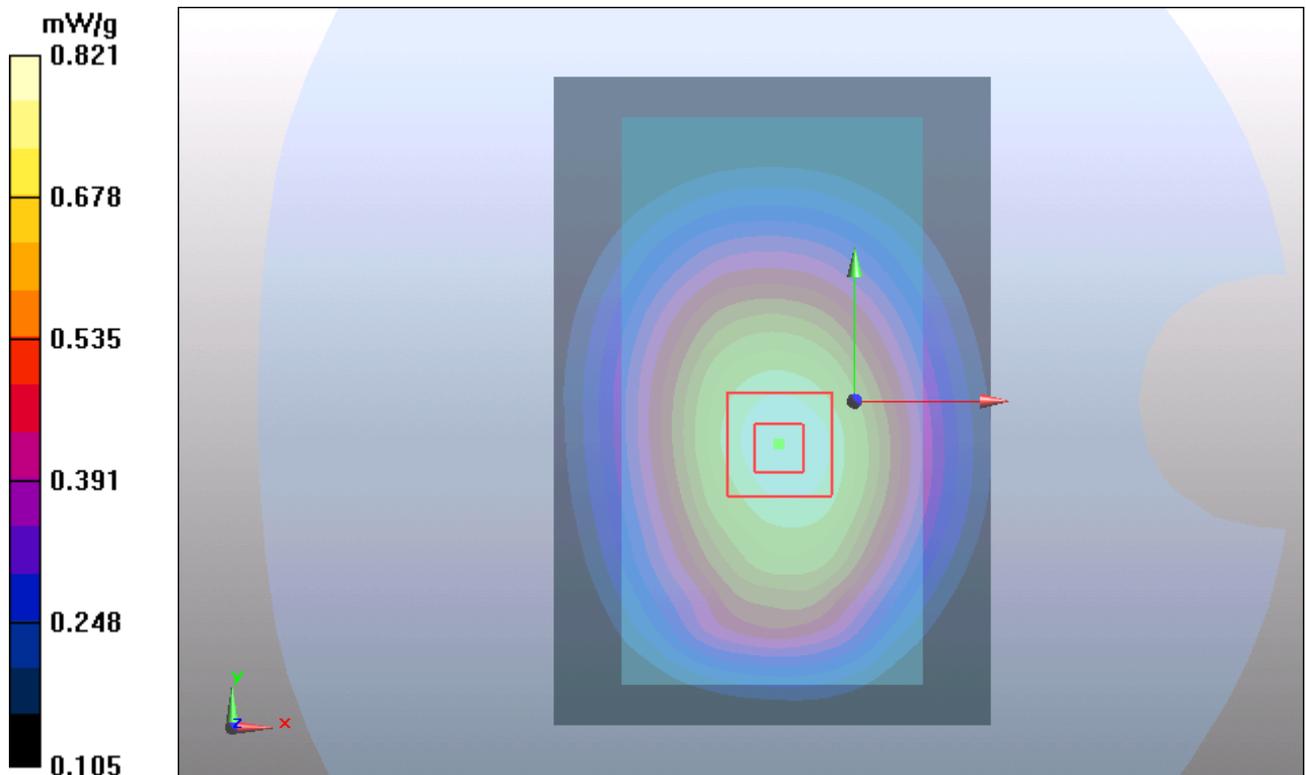


Figure 23 Body, Back Side, GSM 850 GPRS (1Txslot) Channel 251

GSM 850 GPRS (1Txslot) Back Side Middle

Date/Time: 6/9/2012 4:08:13 PM

Communication System: GPRS 1TX; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.38, 9.38, 9.38); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.930 mW/g

Back Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.5 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.880 mW/g; SAR(10 g) = 0.655 mW/g

Maximum value of SAR (measured) = 0.923 mW/g

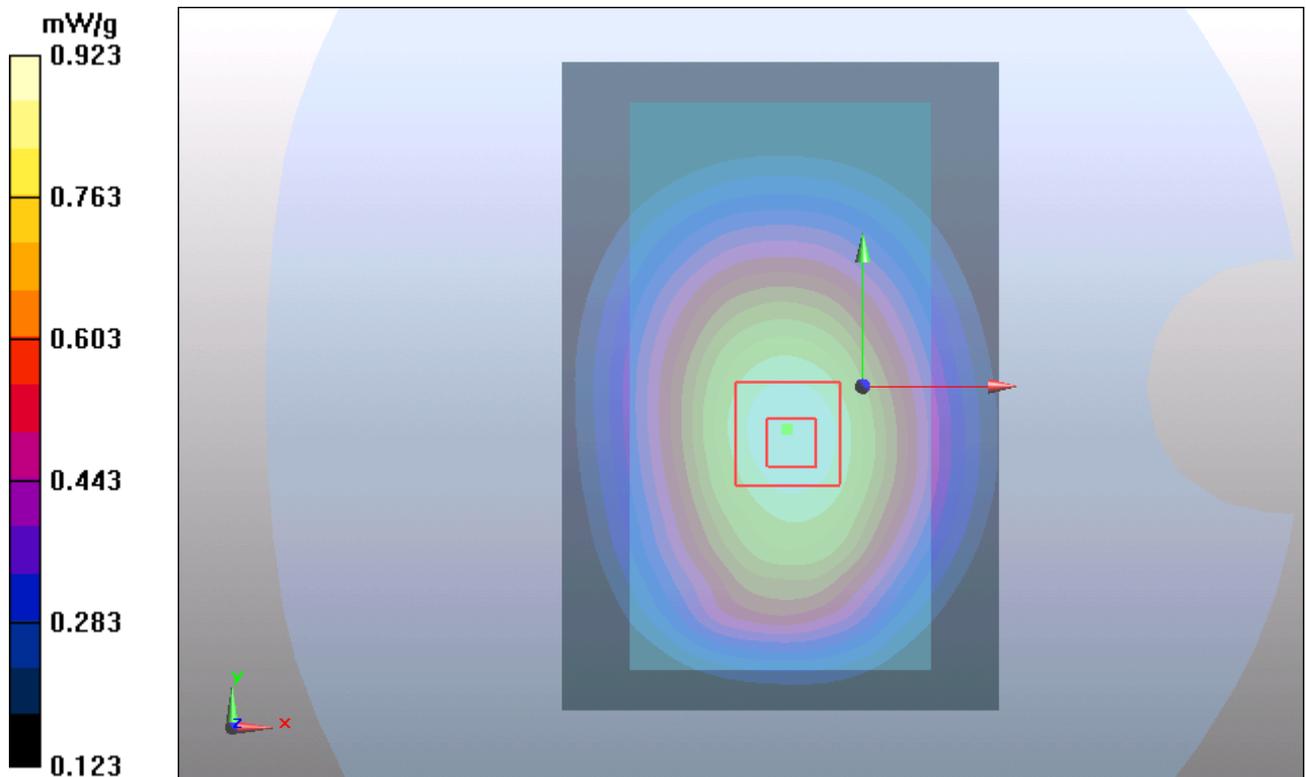


Figure 24 Body, Back Side, GSM 850 GPRS (1Txslot) Channel 190

GSM 850 GPRS (1Txslot) Back Side Low

Date/Time: 6/9/2012 4:41:40 PM

Communication System: GPRS 1TX; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.939$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.38, 9.38, 9.38); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.899 mW/g

Back Side Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.2 V/m; Power Drift = -0.065 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.859 mW/g; SAR(10 g) = 0.639 mW/g

Maximum value of SAR (measured) = 0.902 mW/g

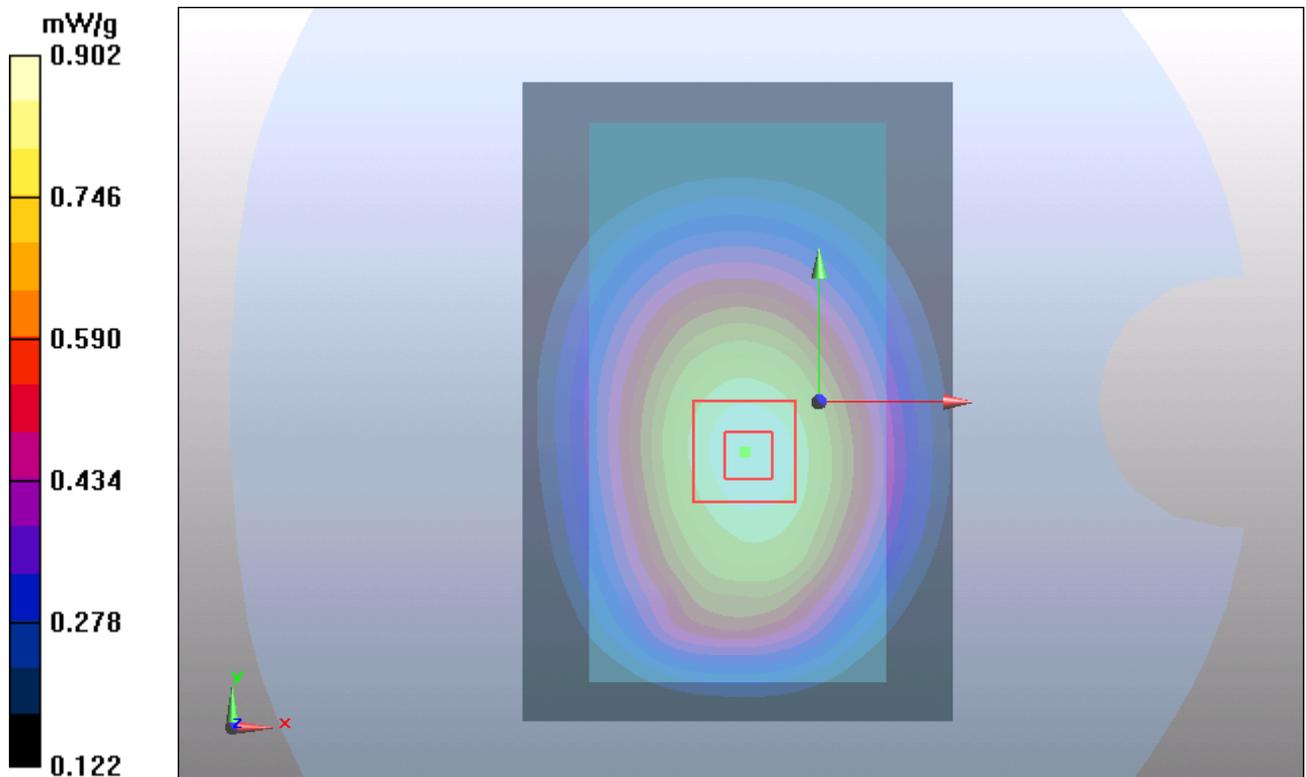


Figure 25 Body, Back Side, GSM 850 GPRS (1Txslot) Channel 128

GSM 850 GPRS (2Txslots) Back Side High

Date/Time: 6/8/2012 10:23:54 PM

Communication System: GPRS 2TX ; Frequency: 848.8 MHz;Duty Cycle: 1:4.14954

Medium parameters used: $f = 849$ MHz; $\sigma = 0.971$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.38, 9.38, 9.38); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.37 mW/g

Back Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 1.29 mW/g; SAR(10 g) = 0.961 mW/g

Maximum value of SAR (measured) = 1.36 mW/g

Back Side High/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.696 mW/g

Maximum value of SAR (measured) = 1.18 mW/g

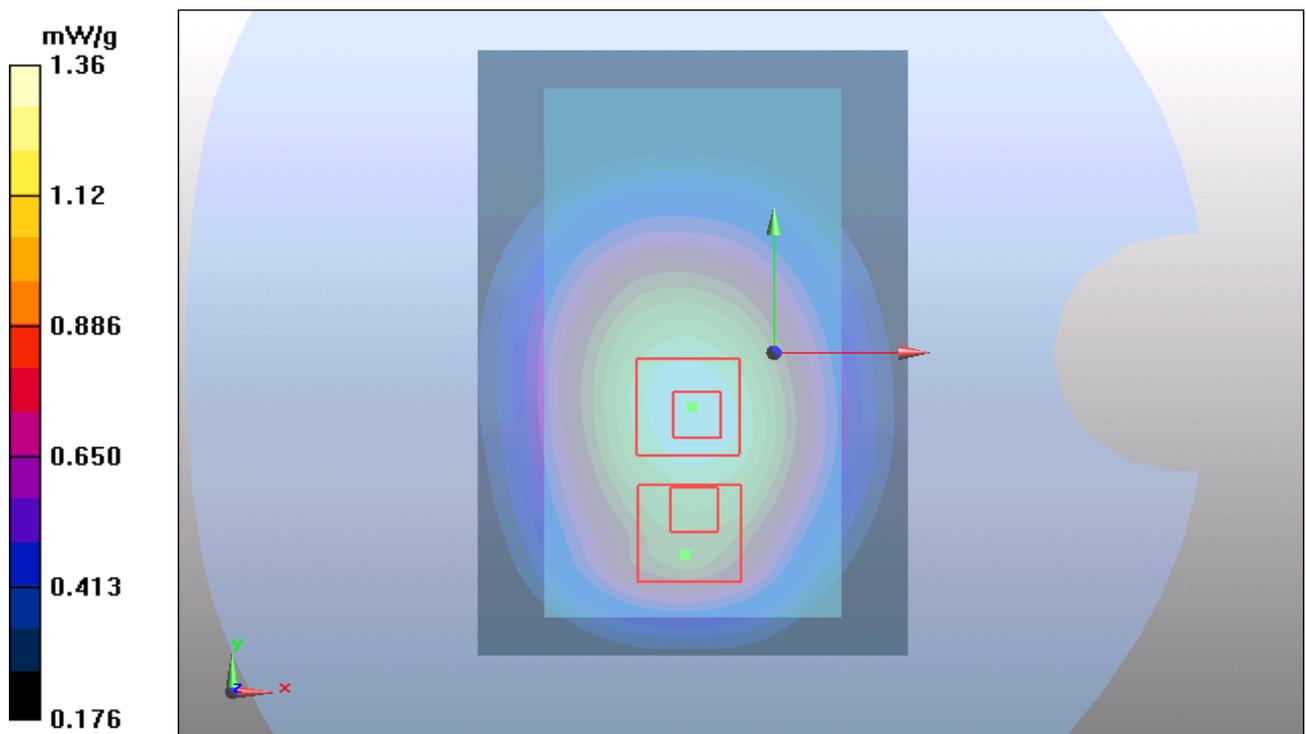


Figure 26 Body, Back Side, GSM 850 GPRS (2Txslots) Channel 251

GSM 850 GPRS (2Txslots) Back Side Middle

Date/Time: 6/8/2012 9:59:17 PM

Communication System: GPRS 2TX ; Frequency: 836.6 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 837$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.38, 9.38, 9.38); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.5 mW/g


Back Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 38.3 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 1.44 mW/g; SAR(10 g) = 1.07 mW/g

Maximum value of SAR (measured) = 1.51 mW/g

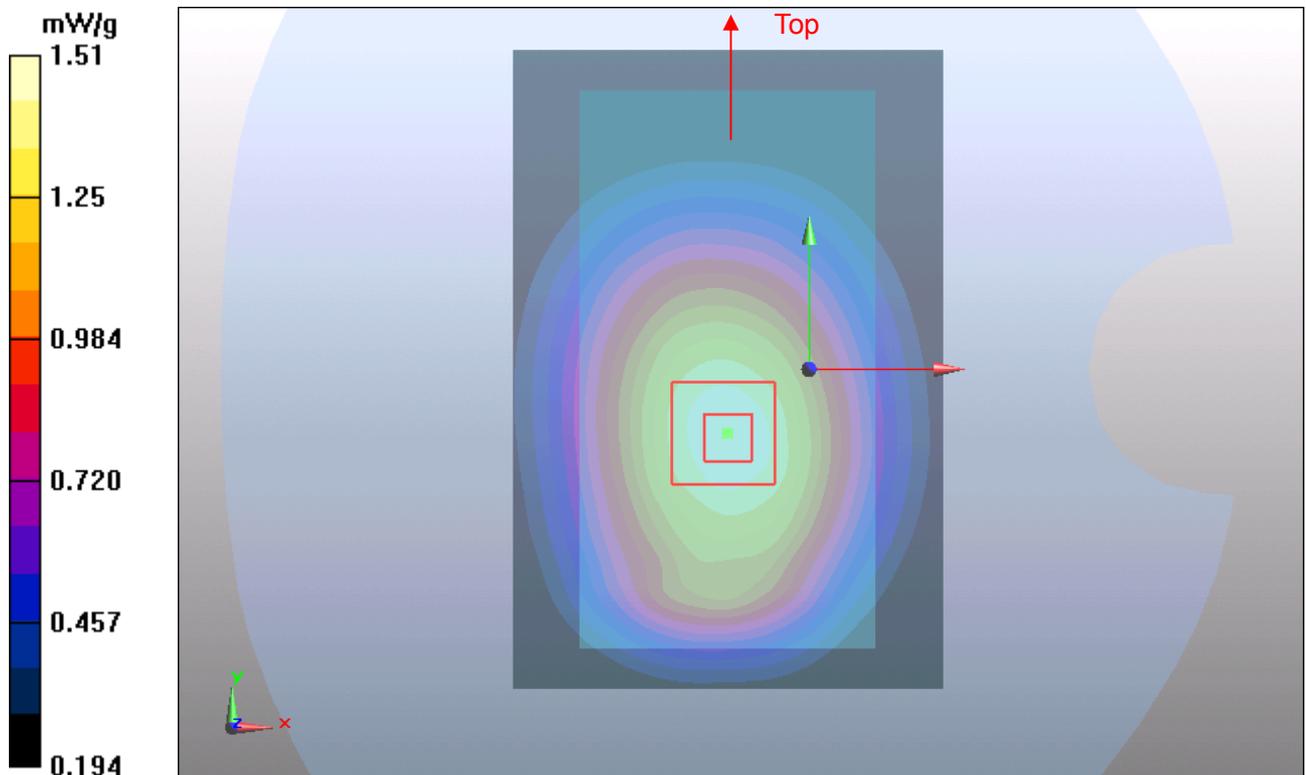

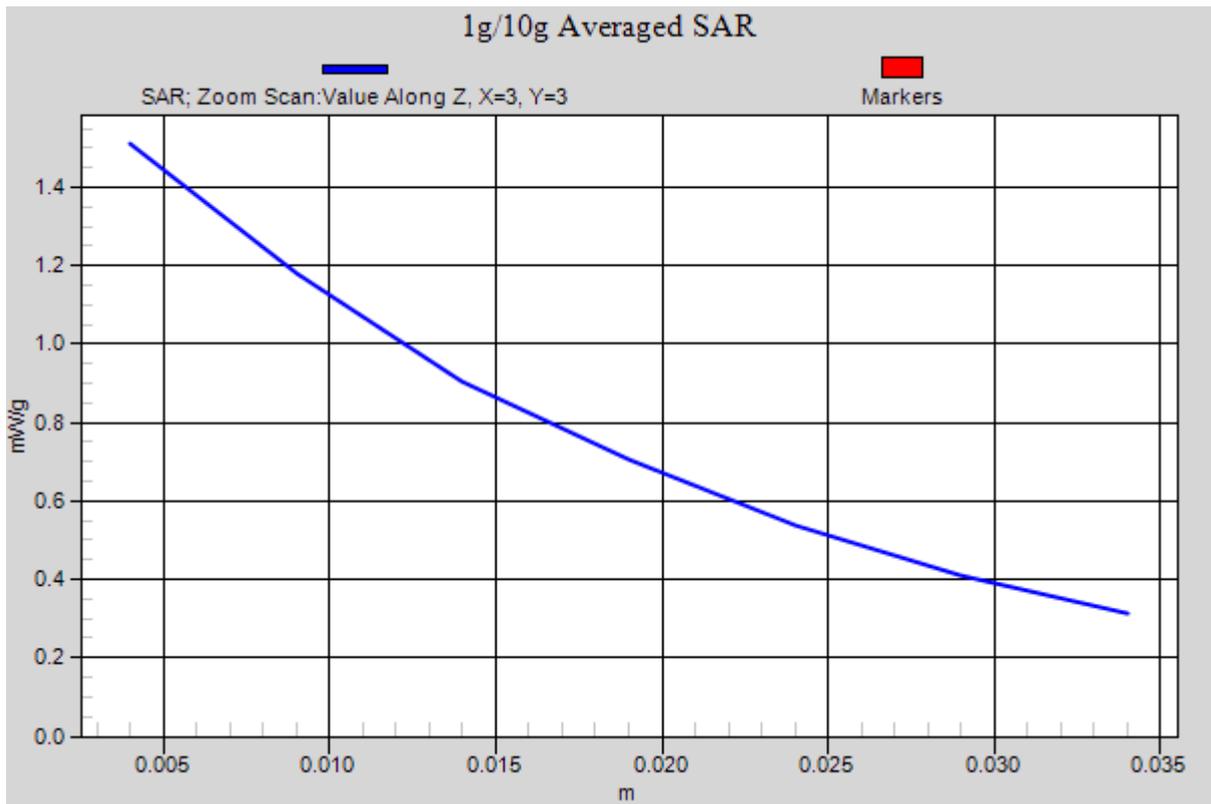


Figure 27 Body, Back Side, GSM 850 GPRS (2Txslots) Channel 190

GSM 850 GPRS (2Txslots) Back Side Low

Date/Time: 6/8/2012 11:01:25 PM

Communication System: GPRS 2TX ; Frequency: 824.2 MHz;Duty Cycle: 1:4.14954

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.939$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.38, 9.38, 9.38); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.46 mW/g

Back Side Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 37.3 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 1.39 mW/g; SAR(10 g) = 1.03 mW/g

Maximum value of SAR (measured) = 1.46 mW/g

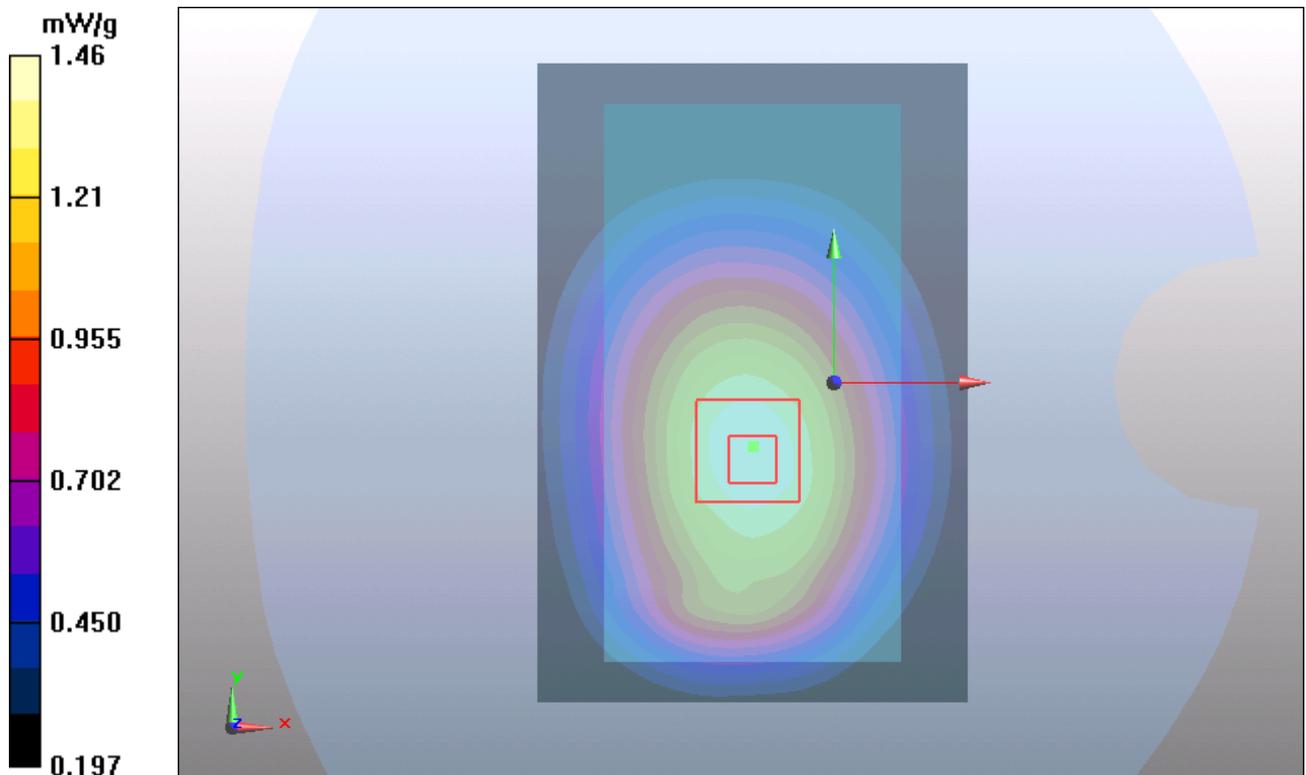


Figure 28 Body, Back Side, GSM 850 GPRS (2Txslots) Channel 128

GSM 850 GPRS (3Txslots) Back Side High

Date/Time: 6/9/2012 10:24:32 AM

Communication System: GPRS 3TX; Frequency: 848.8 MHz; Duty Cycle: 1:2.76694

Medium parameters used: $f = 849$ MHz; $\sigma = 0.971$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.38, 9.38, 9.38); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.22 mW/g

Back Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.9 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.875 mW/g

Maximum value of SAR (measured) = 1.24 mW/g

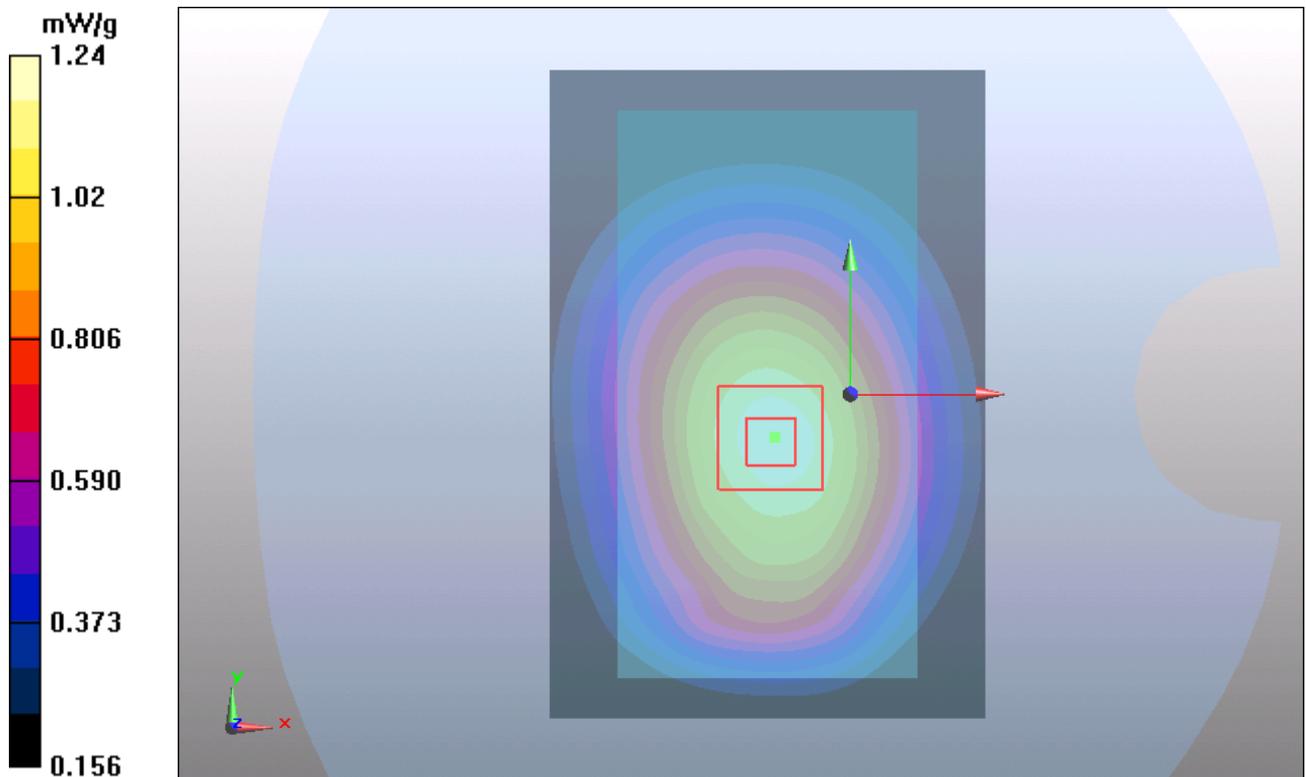


Figure 29 Body, Back Side, GSM 850 GPRS (3Txslots) Channel 251

GSM 850 GPRS (3Txslots) Back Side Middle

Date/Time: 6/8/2012 11:56:49 PM

Communication System: GPRS 3TX; Frequency: 836.6 MHz; Duty Cycle: 1:2.76694

Medium parameters used: $f = 837$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.38, 9.38, 9.38); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.4 mW/g

Back Side Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.5 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.755 mW/g

Maximum value of SAR (measured) = 1.28 mW/g

Back Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.5 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 1.35 mW/g; SAR(10 g) = 1 mW/g

Maximum value of SAR (measured) = 1.43 mW/g

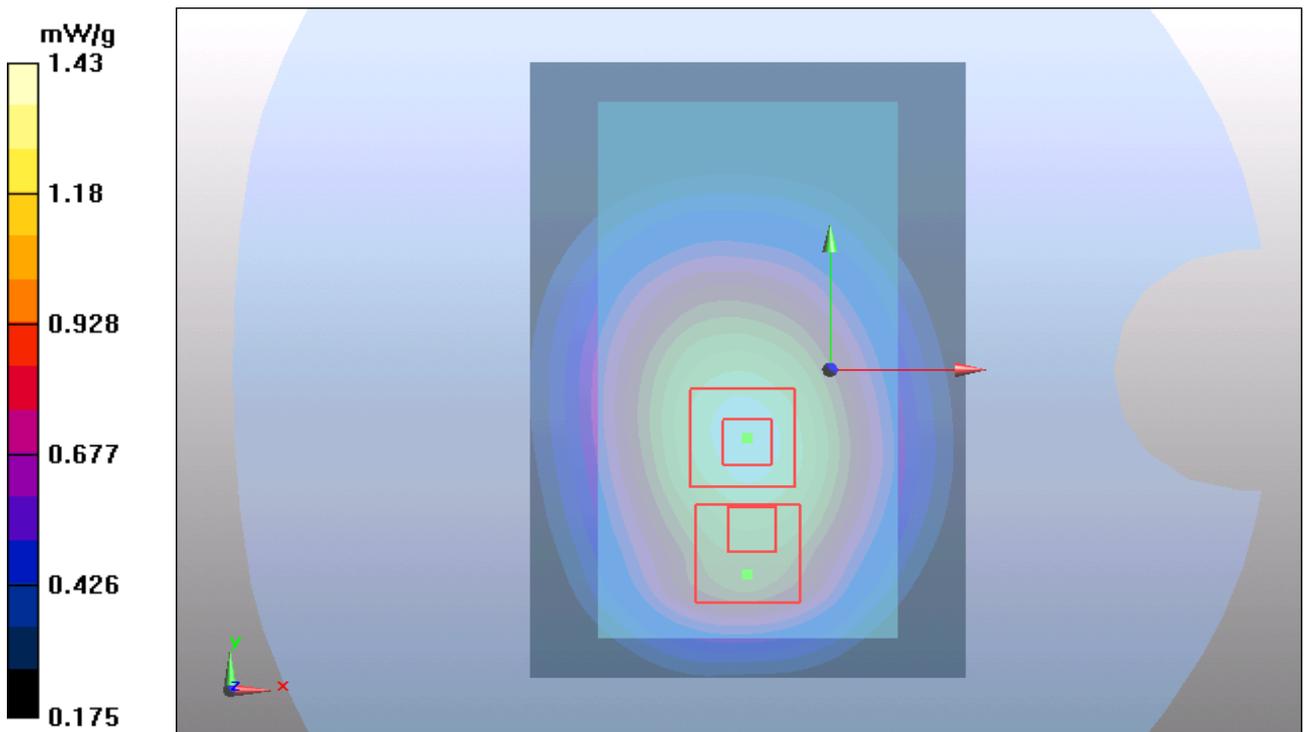


Figure 30 Body, Back Side, GSM 850 GPRS (3Txslots) Channel 190

GSM 850 GPRS (3Txslots) Back Side Low

Date/Time: 6/9/2012 10:47:44 AM, Date/Time: 6/9/2012 10:55:34 AM

Communication System: GPRS 3TX; Frequency: 824.2 MHz; Duty Cycle: 1:2.76694

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.939$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.38, 9.38, 9.38); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.23 mW/g

Back Side Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 35.4 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.890 mW/g

Maximum value of SAR (measured) = 1.25 mW/g

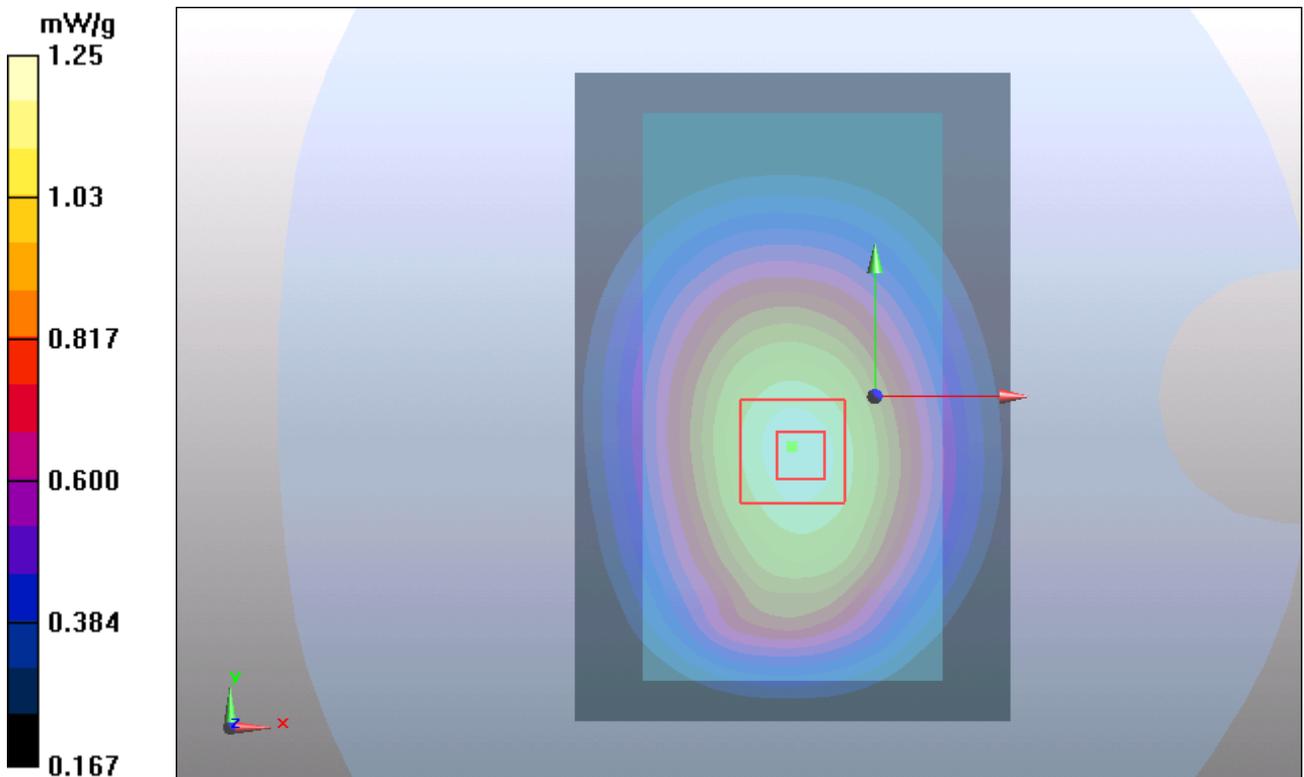


Figure 31 Body, Back Side, GSM 850 GPRS (3Txslots) Channel 128

GSM 850 GPRS (4Txslots) Back Side High

Date/Time: 6/9/2012 11:30:07 AM

Communication System: GPRS 4TX; Frequency: 848.8 MHz; Duty Cycle: 1:2.07491

Medium parameters used: $f = 849$ MHz; $\sigma = 0.971$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.38, 9.38, 9.38); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.06 mW/g

Back Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.2 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.747 mW/g

Maximum value of SAR (measured) = 1.06 mW/g

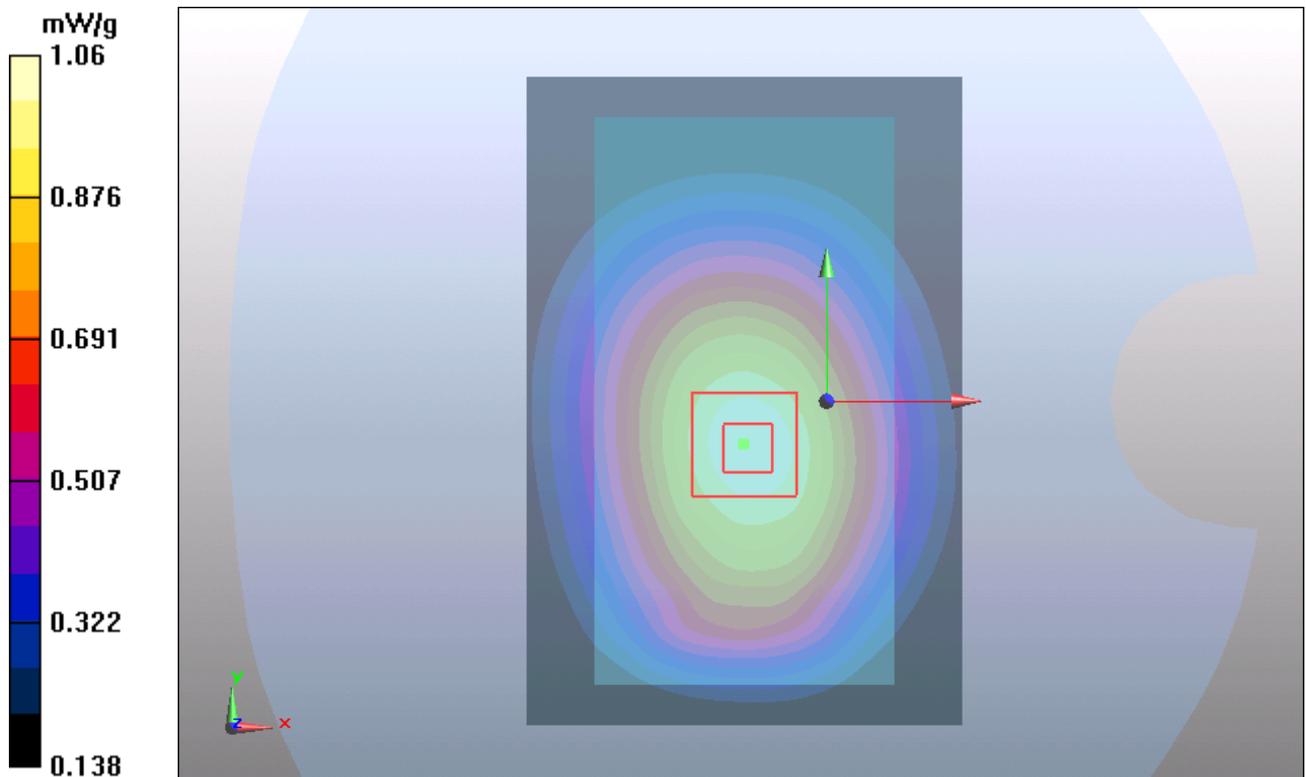


Figure 32 Body, Back Side, GSM 850 GPRS (4Txslots) Channel 251

GSM 850 GPRS (4Txslots) Back Side Middle

Date/Time: 6/9/2012 11:04:00 AM

Communication System: GPRS 4TX; Frequency: 836.6 MHz; Duty Cycle: 1:2.07491

Medium parameters used: $f = 837$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.38, 9.38, 9.38); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.14 mW/g

Back Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.5 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.800 mW/g

Maximum value of SAR (measured) = 1.13 mW/g

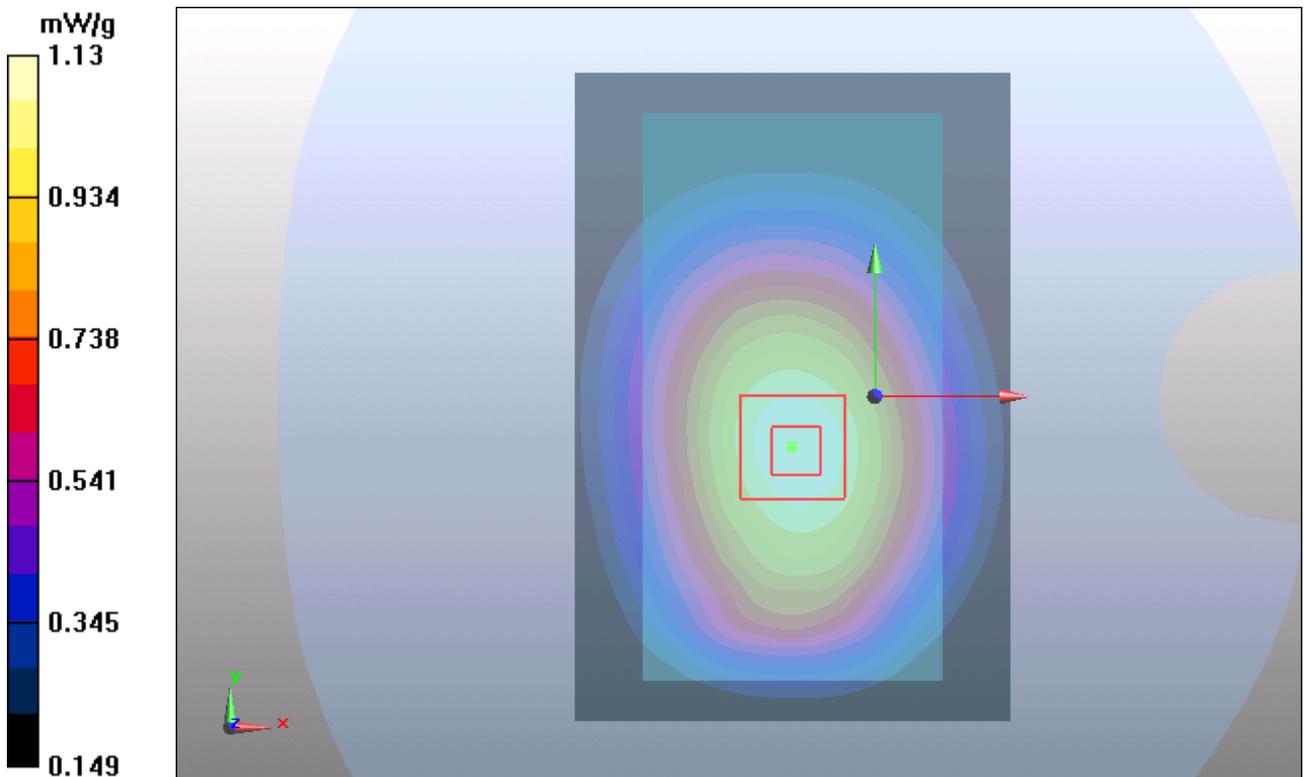


Figure 33 Body, Back Side, GSM 850 GPRS (4Txslots) Channel 190

GSM 850 GPRS (4Txslots) Back Side Low

Date/Time: 6/9/2012 11:45:48 AM

Communication System: GPRS 4TX; Frequency: 824.2 MHz; Duty Cycle: 1:2.07491

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.939$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.38, 9.38, 9.38); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.03 mW/g

Back Side Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.9 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 1.2 W/kg

SAR(1 g) = 0.964 mW/g; SAR(10 g) = 0.721 mW/g

Maximum value of SAR (measured) = 1.01 mW/g

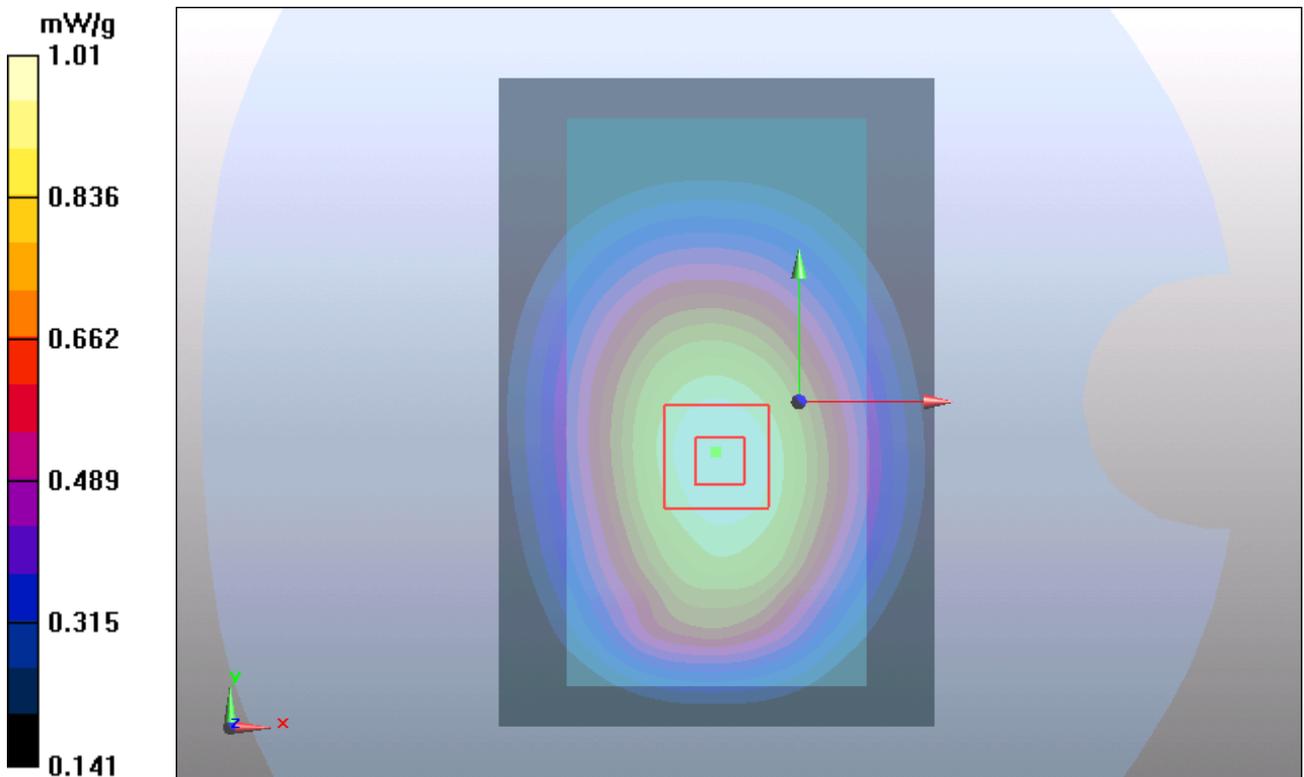


Figure 34 Body, Back Side, GSM 850 GPRS (4Txslots) Channel 128

GSM 850 GPRS (2Txslots) Front Side High

Date/Time: 6/9/2012 12:35:10 PM

Communication System: GPRS 2TX ; Frequency: 848.8 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 849$ MHz; $\sigma = 0.971$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.38, 9.38, 9.38); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Front Side High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.896 mW/g

Front Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.9 V/m; Power Drift = 0.110 dB

Peak SAR (extrapolated) = 1.1 W/kg

SAR(1 g) = 0.868 mW/g; SAR(10 g) = 0.659 mW/g

Maximum value of SAR (measured) = 0.907 mW/g

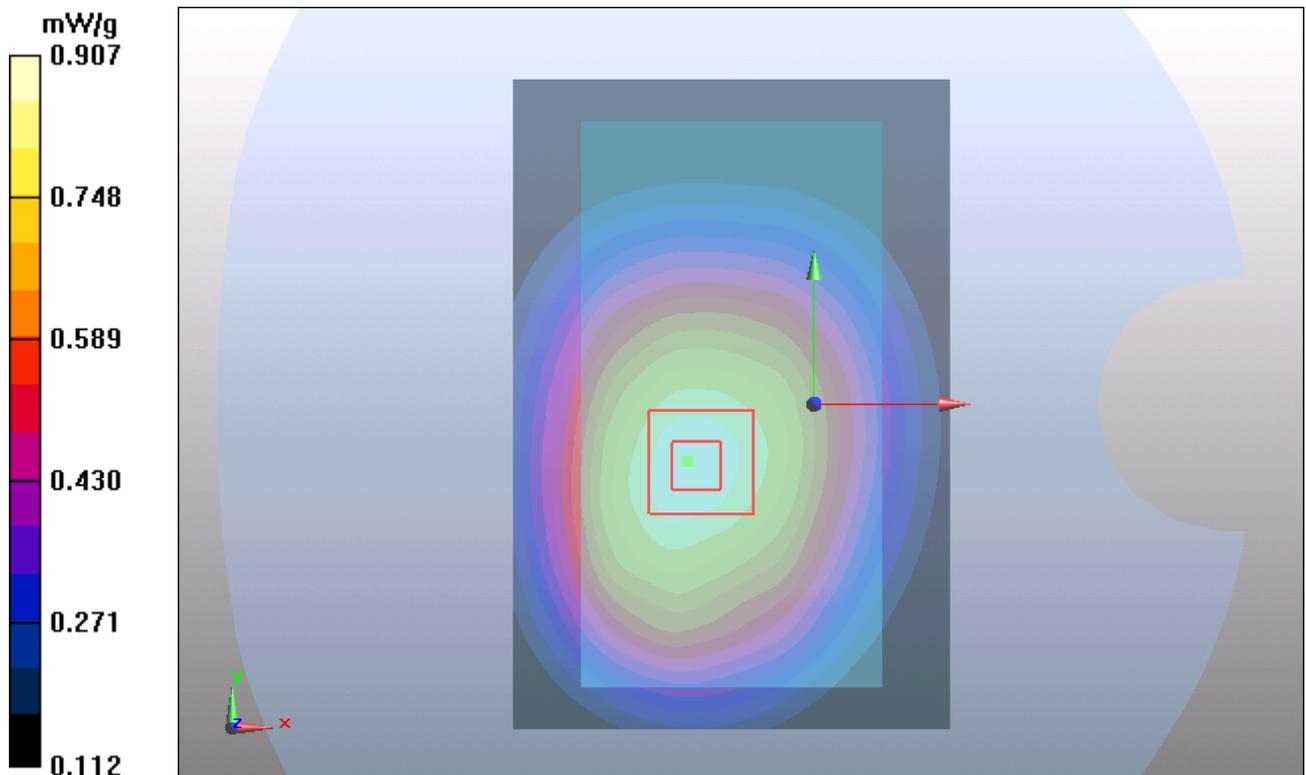


Figure 35 Body, Front Side, GSM 850 GPRS (2Txslots) Channel 251

GSM 850 GPRS (2Txslots) Front Side Middle

Date/Time: 6/9/2012 12:03:40 PM

Communication System: GPRS 2TX ; Frequency: 836.6 MHz;Duty Cycle: 1:4.14954

Medium parameters used: $f = 837$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.38, 9.38, 9.38); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Front Side Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.993 mW/g

Front Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.9 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.943 mW/g; SAR(10 g) = 0.721 mW/g

Maximum value of SAR (measured) = 0.982 mW/g

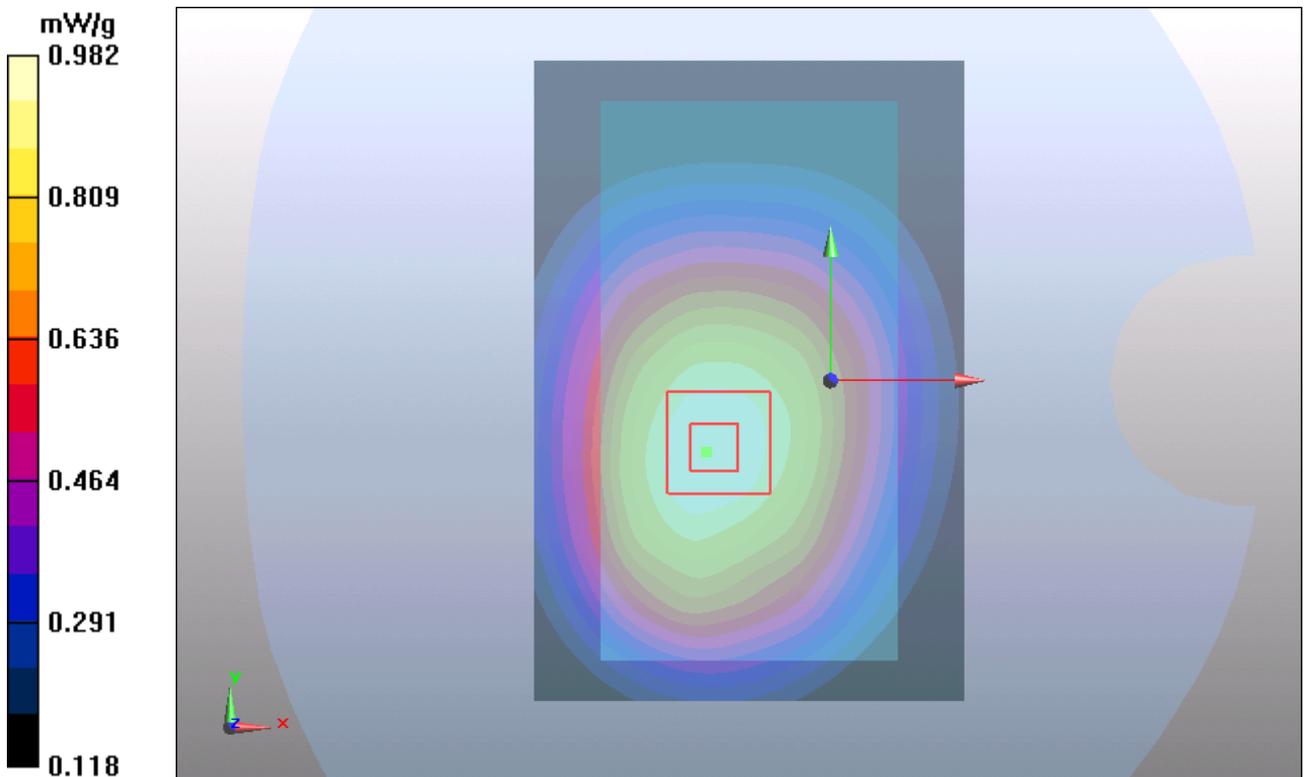


Figure 36 Body, Front Side, GSM 850 GPRS (2Txslots) Channel 190

GSM 850 GPRS (2Txslots) Front Side Low

Date/Time: 6/9/2012 12:19:25 PM

Communication System: GPRS 2TX ; Frequency: 824.2 MHz; Duty Cycle: 1:4.14954

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.939$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.38, 9.38, 9.38); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Front Side Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.852 mW/g

Front Side Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.8 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.818 mW/g; SAR(10 g) = 0.624 mW/g

Maximum value of SAR (measured) = 0.853 mW/g

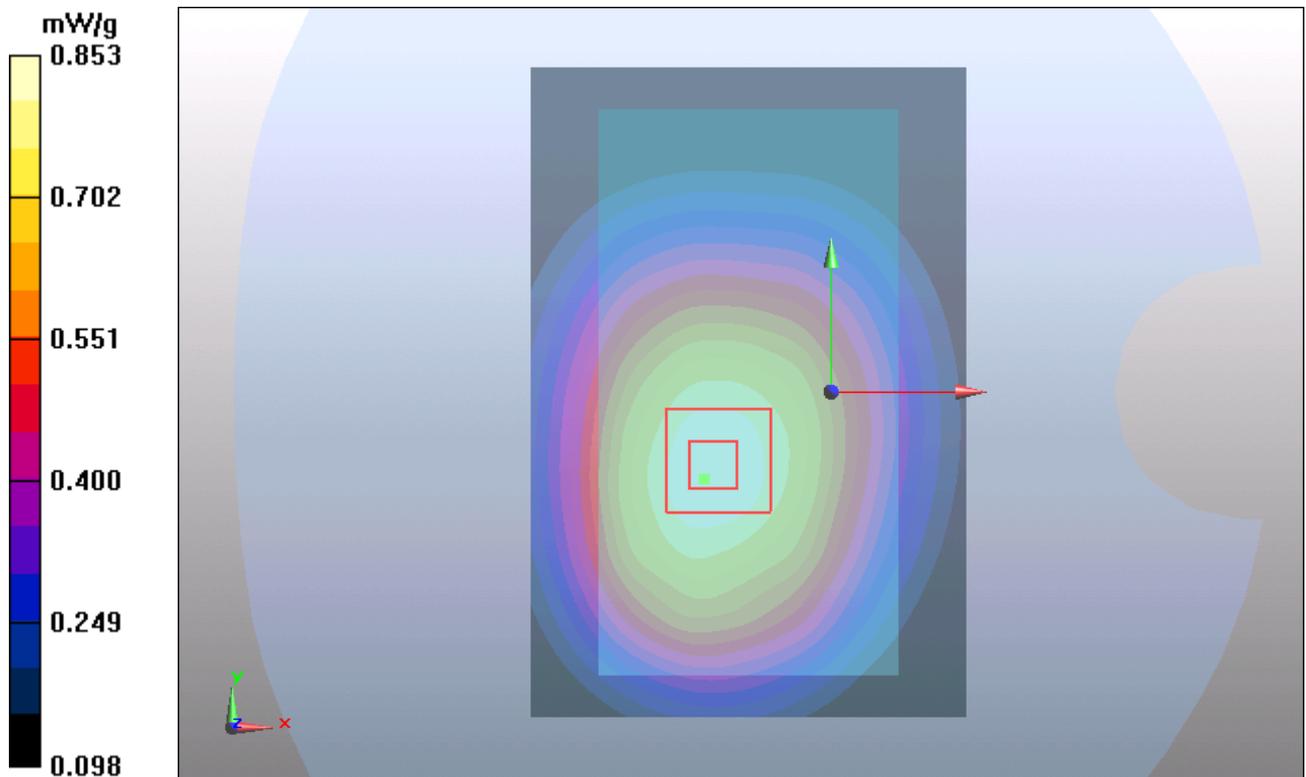


Figure 37 Body, Front Side, GSM 850 GPRS (2Txslots) Channel 128

GSM 850 GPRS (2Txslots) Left Edge Middle

Date/Time: 6/9/2012 1:21:33 PM

Communication System: GPRS 2TX ; Frequency: 836.6 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 837$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.38, 9.38, 9.38); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Left Edge Middle/Area Scan (31x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.663 mW/g

Left Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.2 V/m; Power Drift = -0.094 dB

Peak SAR (extrapolated) = 0.872 W/kg

SAR(1 g) = 0.612 mW/g; SAR(10 g) = 0.420 mW/g

Maximum value of SAR (measured) = 0.655 mW/g

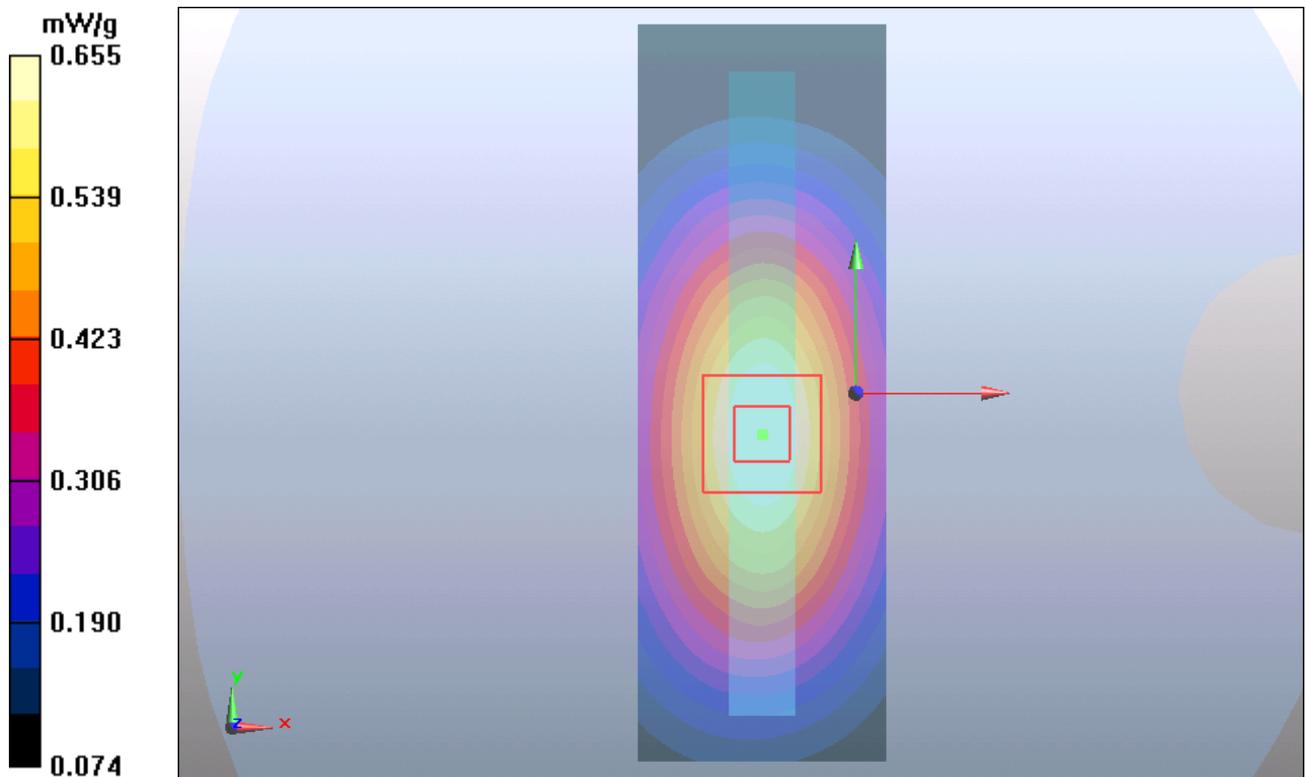


Figure 38 Body, Left Edge, GSM 850 GPRS (2Txslots) Channel 190

GSM 850 GPRS (2Txslots) Right Edge Middle

Date/Time: 6/9/2012 2:07:33 PM

Communication System: GPRS 2TX ; Frequency: 836.6 MHz;Duty Cycle: 1:4.14954

Medium parameters used: $f = 837$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.38, 9.38, 9.38); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Right Edge Middle/Area Scan (31x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.620 mW/g

Right Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.3 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 0.832 W/kg

SAR(1 g) = 0.588 mW/g; SAR(10 g) = 0.408 mW/g

Maximum value of SAR (measured) = 0.626 mW/g

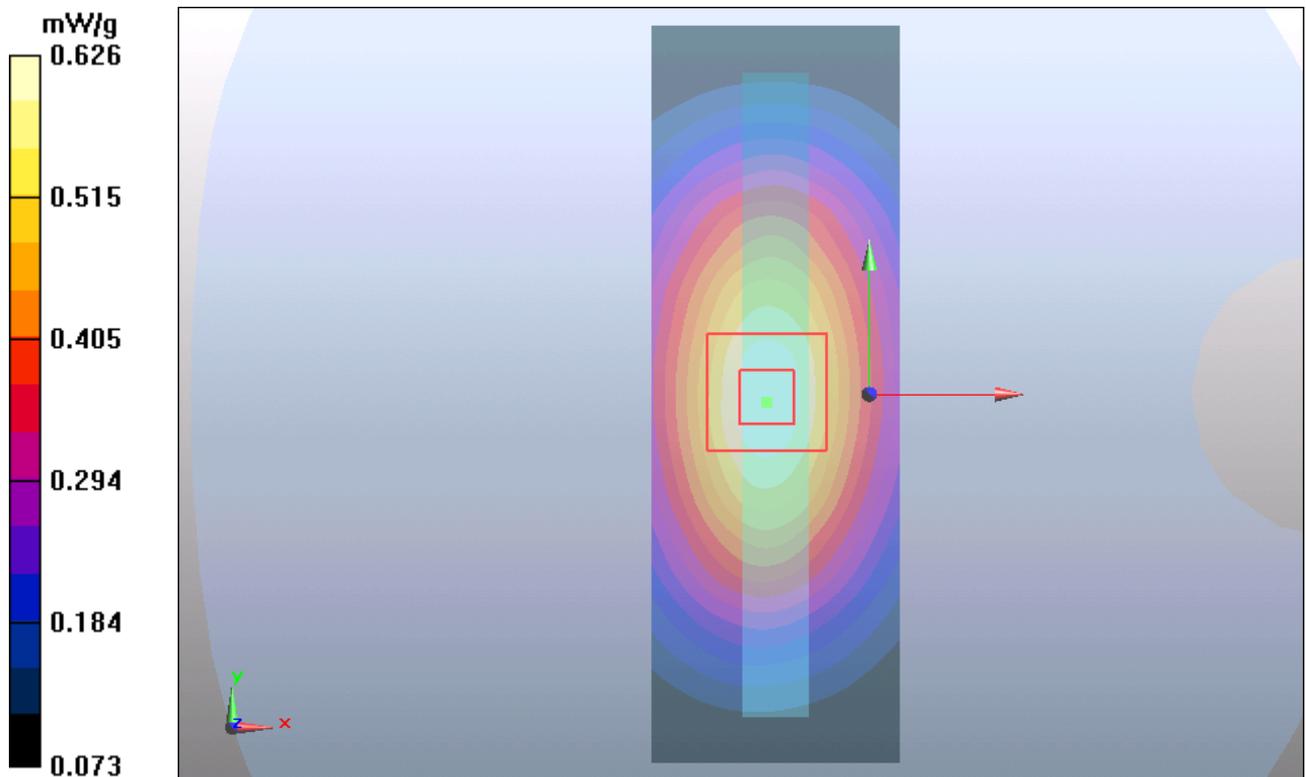


Figure 39 Body, Right Edge, GSM 850 GPRS (2Txslots) Channel 190

GSM 850 GPRS (2Txslots) Bottom Edge Middle

Date/Time: 6/9/2012 2:22:41 PM

Communication System: GPRS 2TX ; Frequency: 836.6 MHz;Duty Cycle: 1:4.14954

Medium parameters used: $f = 837$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.38, 9.38, 9.38); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Bottom Edge Middle/Area Scan (31x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.104 mW/g

Bottom Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10 V/m; Power Drift = 0.064 dB

Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.103 mW/g; SAR(10 g) = 0.066 mW/g

Maximum value of SAR (measured) = 0.110 mW/g

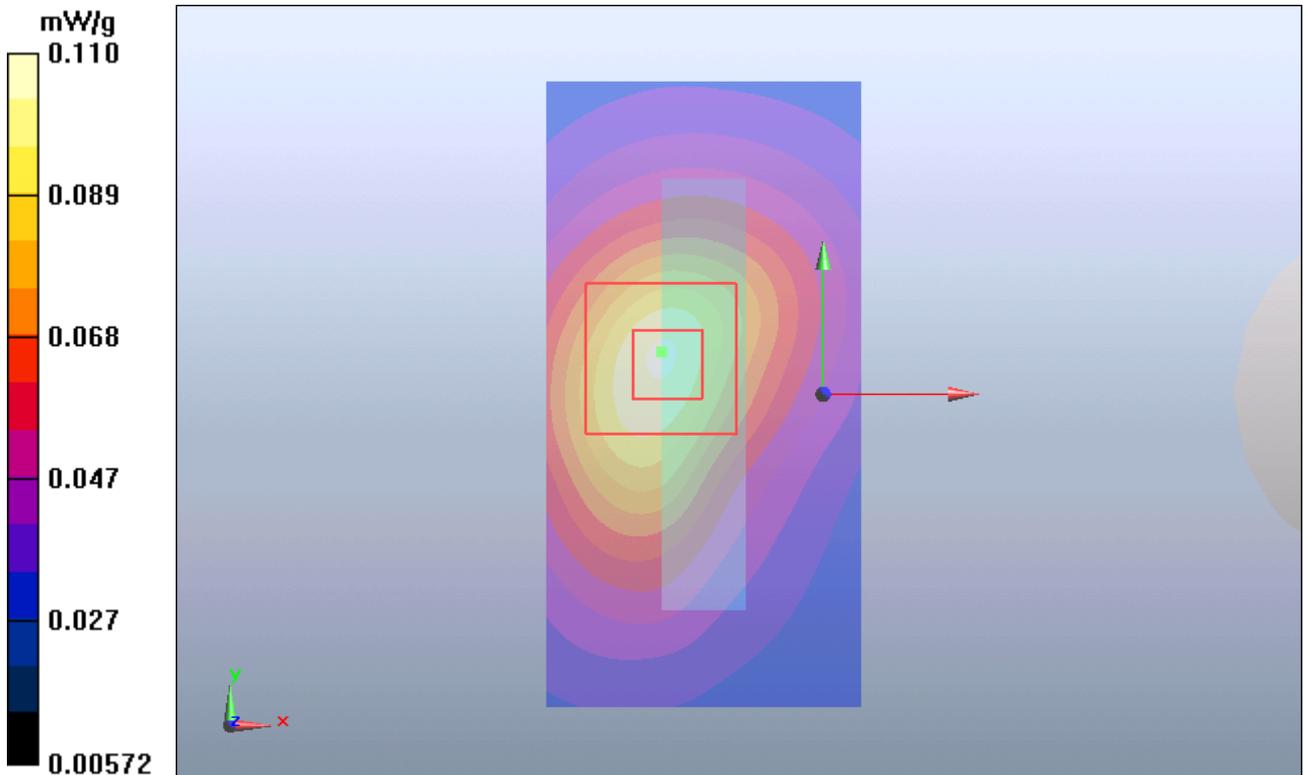


Figure 40 Body, Bottom Edge, GSM 850 GPRS (2Txslots) Channel 190

GSM 850 with Earphone Back Side Middle

Date/Time: 6/9/2012 5:18:06 PM

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.38, 9.38, 9.38); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.797 mW/g

Back Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.7 V/m; Power Drift = -0.057 dB

Peak SAR (extrapolated) = 0.987 W/kg

SAR(1 g) = 0.767 mW/g; SAR(10 g) = 0.565 mW/g

Maximum value of SAR (measured) = 0.808 mW/g

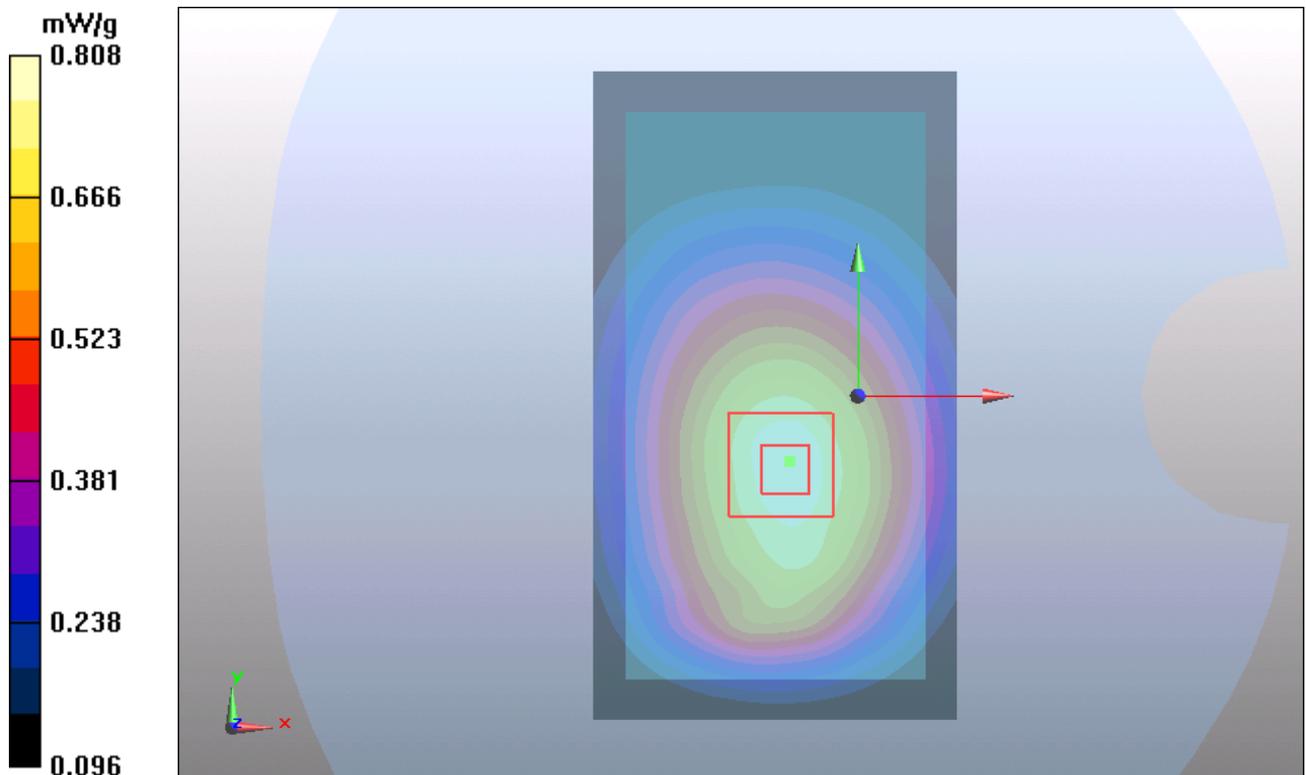


Figure 41 Body with Earphone, Back Side, GSM 850 Channel 190

GSM 850 EGPRS (2Txslots) Back Side Middle

Date/Time: 6/9/2012 4:59:29 PM

Communication System: EGPRS 2TX; Frequency: 836.6 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 837$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(9.38, 9.38, 9.38); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.45 mW/g

Back Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 38.1 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 1.37 mW/g; SAR(10 g) = 1.02 mW/g

Maximum value of SAR (measured) = 1.45 mW/g

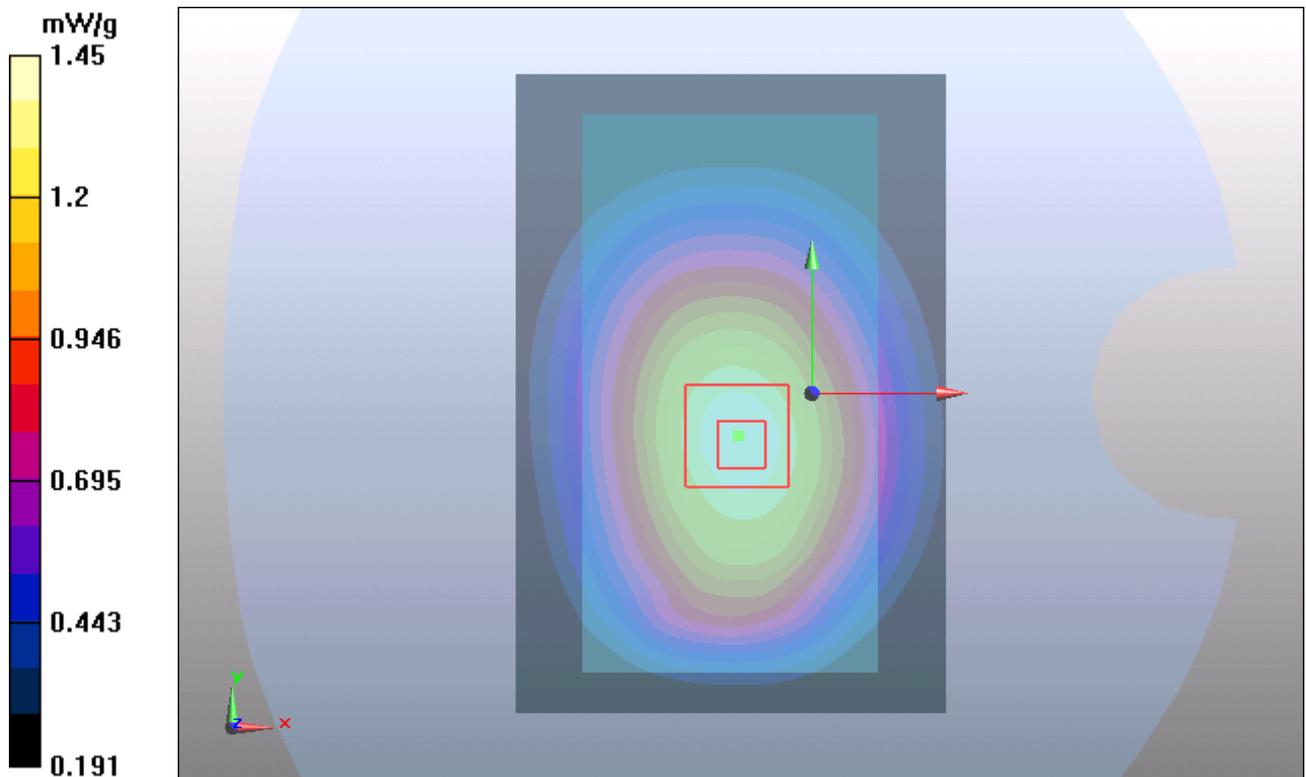


Figure 42 Body, Back Side, GSM 850 EGPRS (2Txslots) Channel 190

GSM 1900 Left Cheek High

Date/Time: 4/10/2012 9:22:51 AM

Communication System: GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.90, 7.90, 7.90) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Cheek High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.832 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.49 V/m; Power Drift = 0.145 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.757 mW/g; SAR(10 g) = 0.430 mW/g

Maximum value of SAR (measured) = 0.816 mW/g

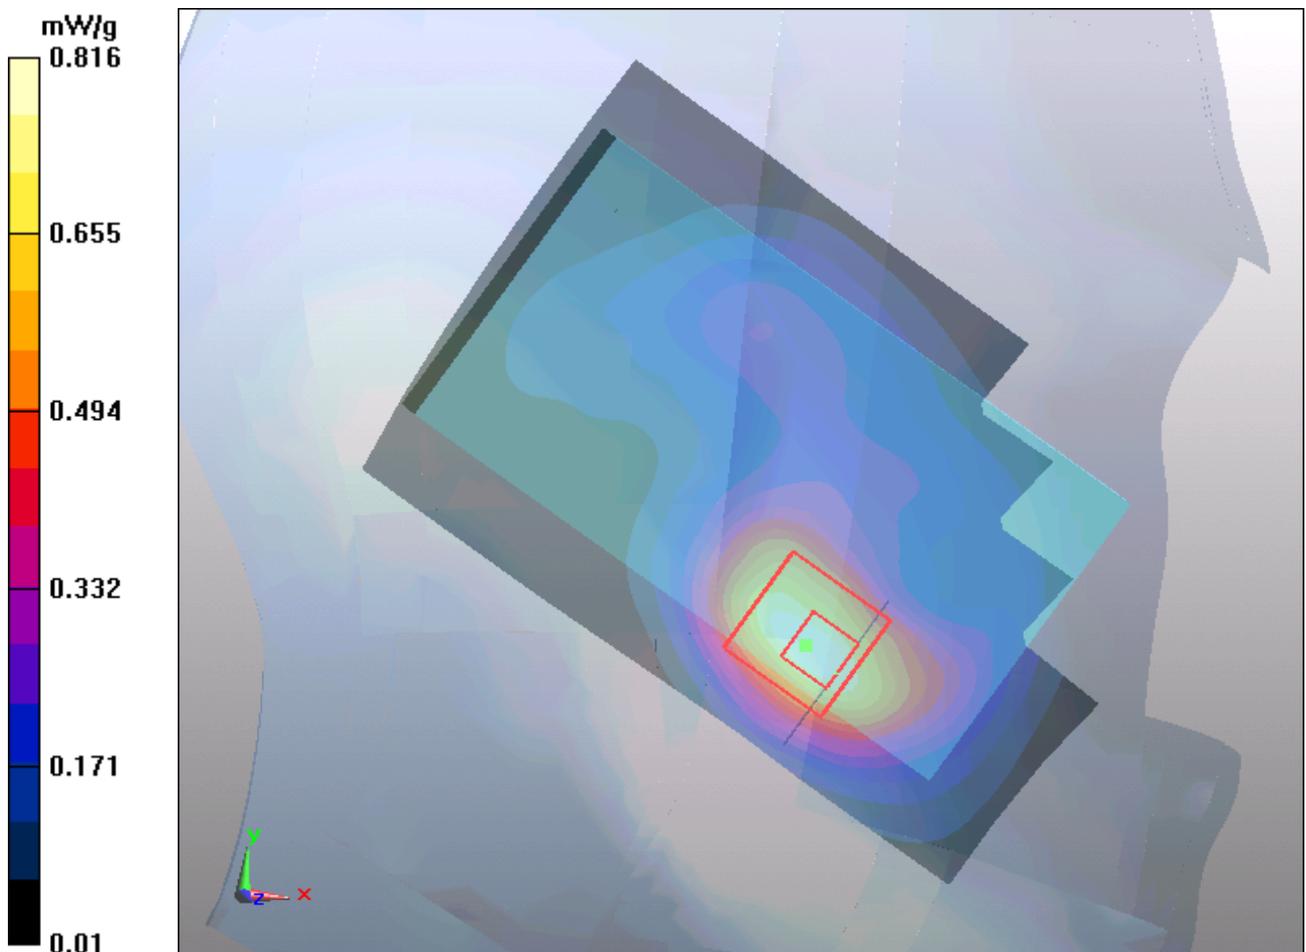


Figure 43 Left Hand Touch Cheek GSM 1900 Channel 810

GSM 1900 Left Cheek Middle

Date/Time: 4/10/2012 9:56:01 AM

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.90, 7.90, 7.90) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.853 mW/g


Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.41 V/m; Power Drift = 0.129 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.770 mW/g; SAR(10 g) = 0.440 mW/g

Maximum value of SAR (measured) = 0.828 mW/g

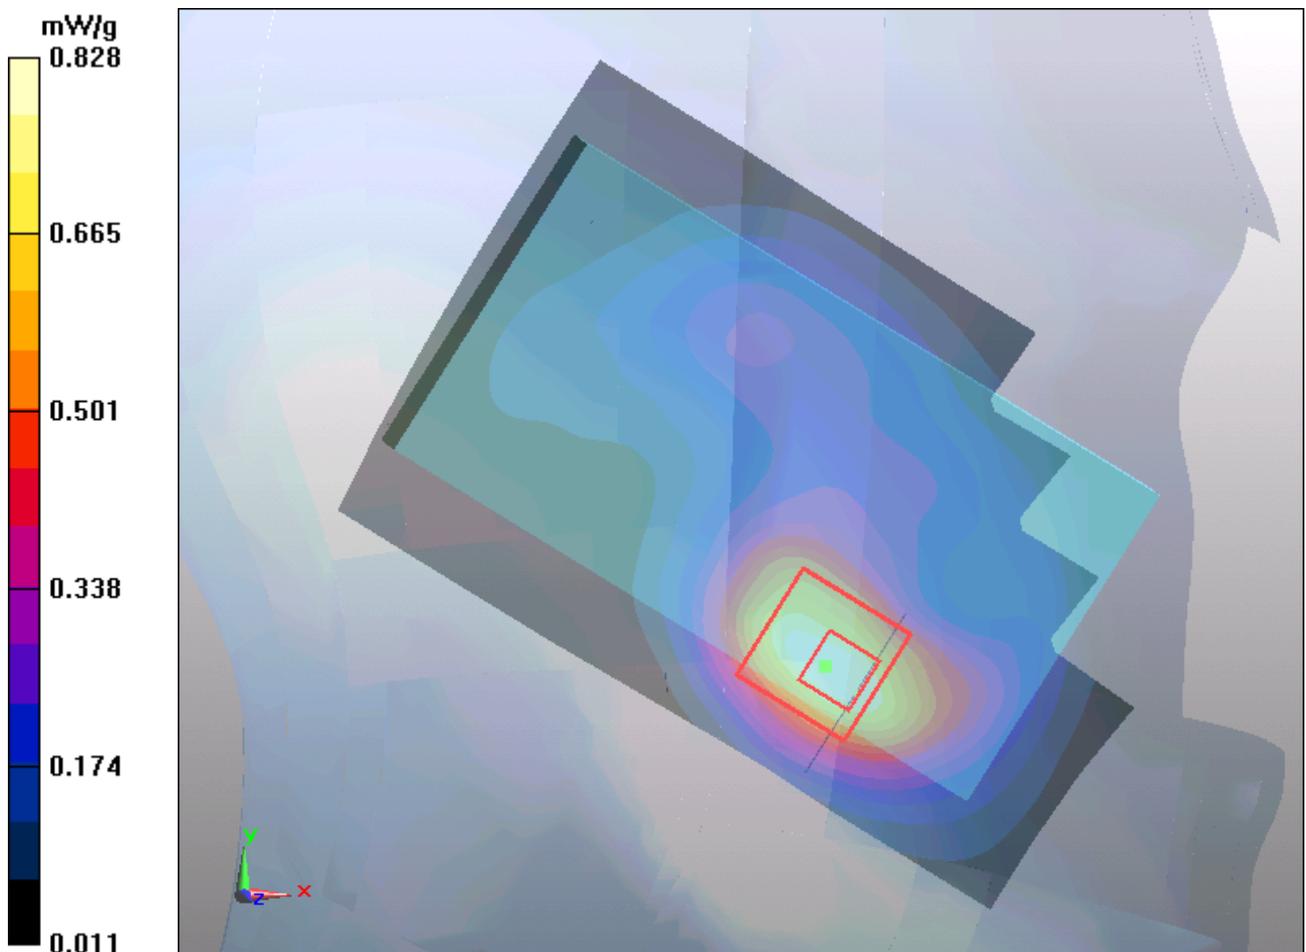

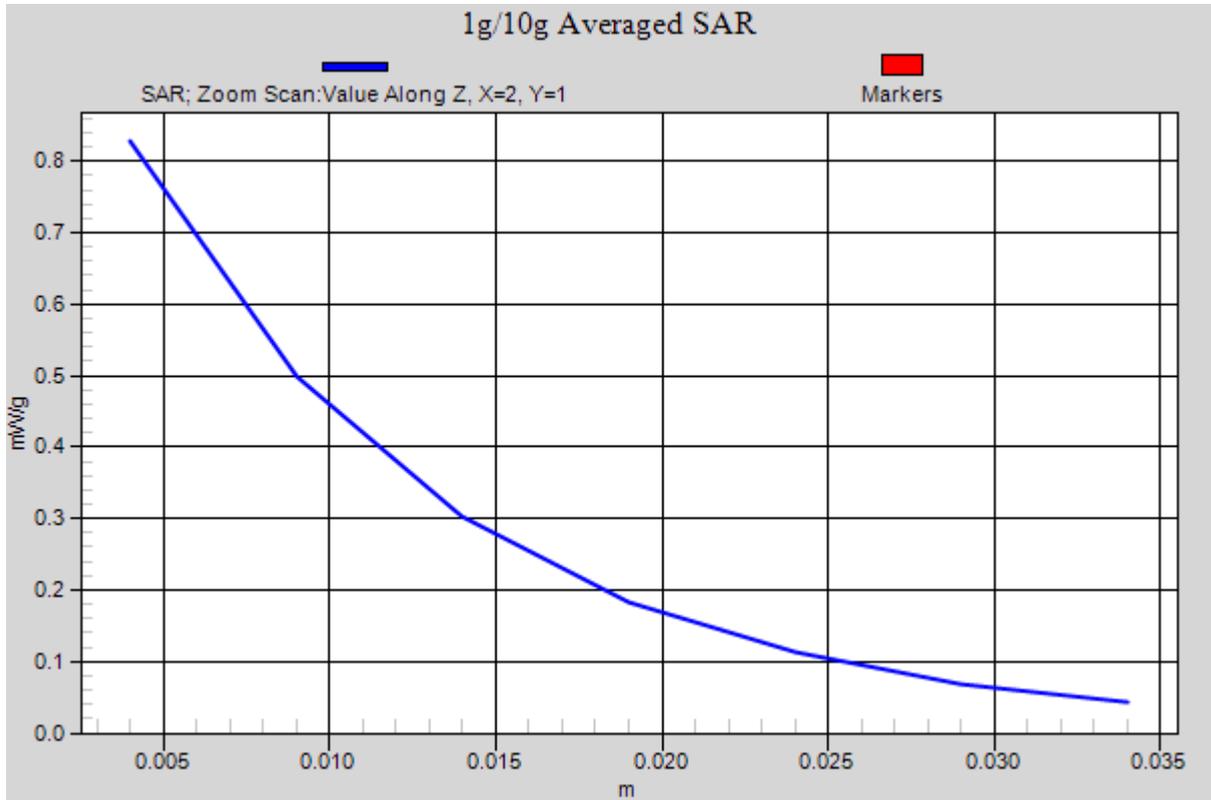


Figure 44 Left Hand Touch Cheek GSM 1900 Channel 661

GSM 1900 Left Cheek Low

Date/Time: 4/10/2012 9:40:19 AM

Communication System: GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.90, 7.90, 7.90) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Cheek Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.641 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.09 V/m; Power Drift = 0.092 dB

Peak SAR (extrapolated) = 0.973 W/kg

SAR(1 g) = 0.578 mW/g; SAR(10 g) = 0.331 mW/g

Maximum value of SAR (measured) = 0.623 mW/g

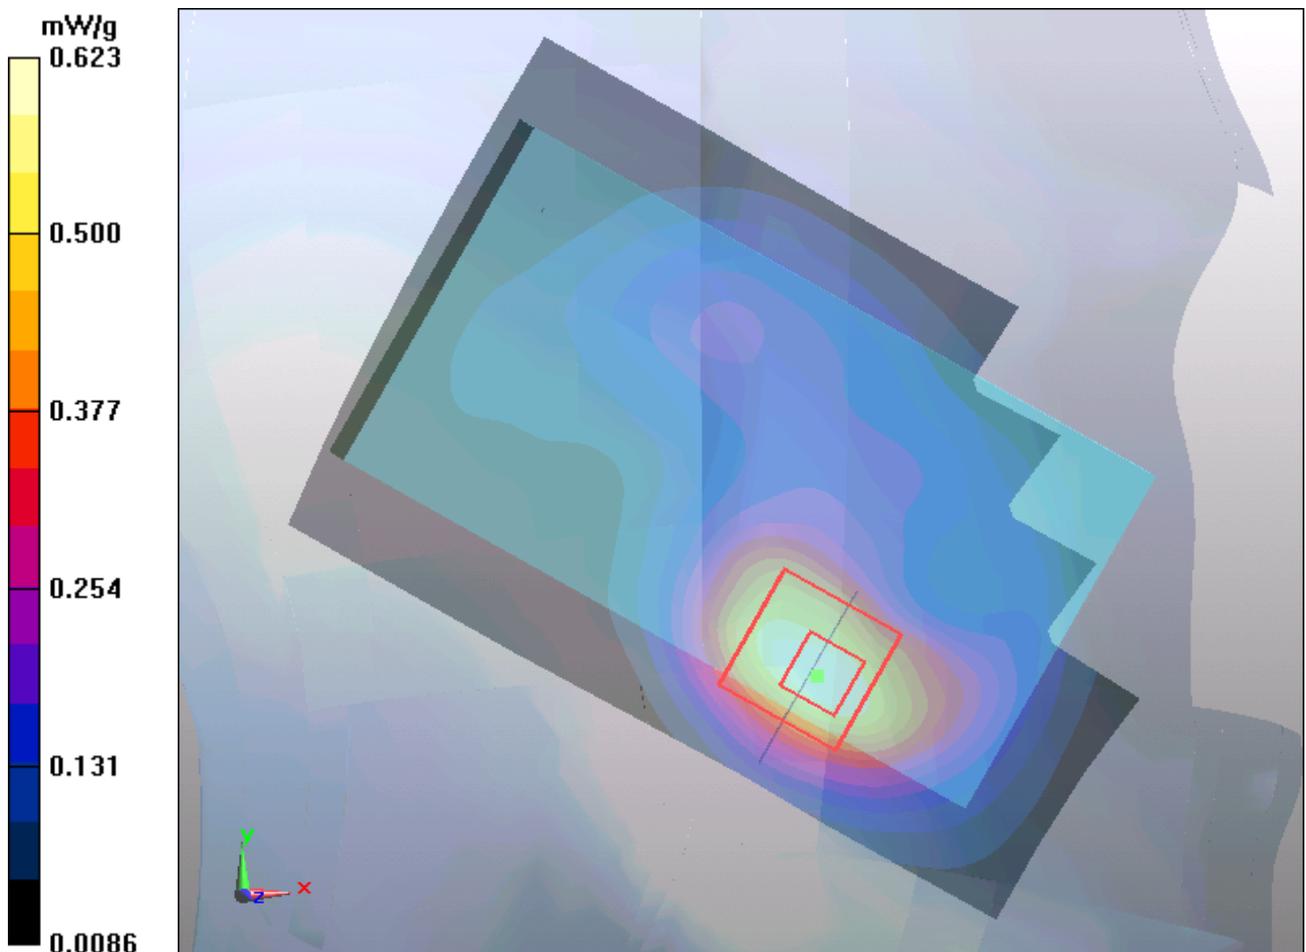


Figure 45 Left Hand Touch Cheek GSM 1900 Channel 512

GSM 1900 Left Tilt Middle

Date/Time: 4/10/2012 11:21:21 PM

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.90, 7.90, 7.90) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.272 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 0.363 W/kg

SAR(1 g) = 0.227 mW/g; SAR(10 g) = 0.139 mW/g

Maximum value of SAR (measured) = 0.249 mW/g

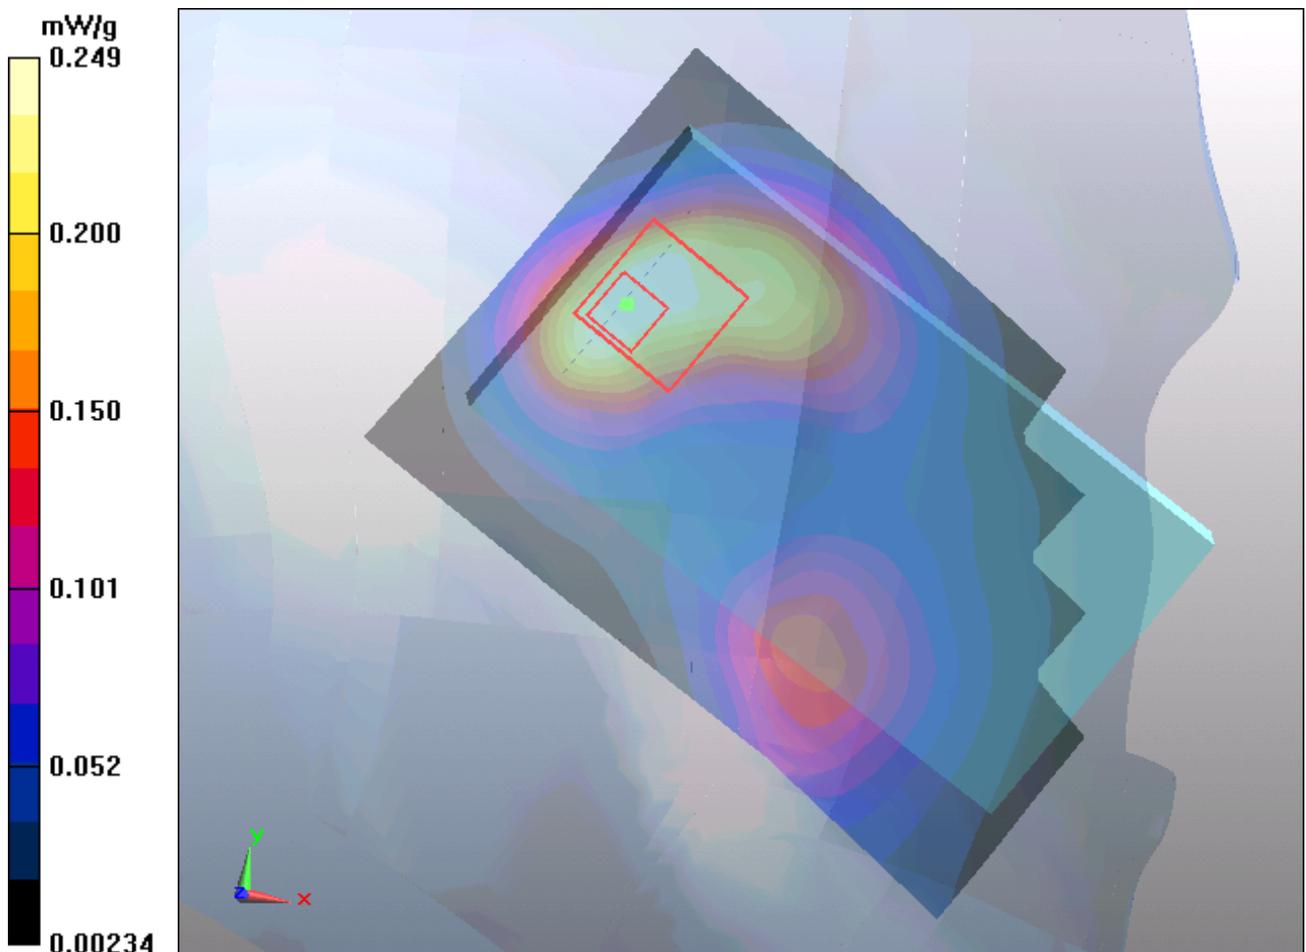


Figure 46 Left Hand Tilt 15° GSM 1900 Channel 661

GSM 1900 Right Cheek Middle

Date/Time: 4/10/2012 10:28:59 PM

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.90, 7.90, 7.90) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.522 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = 0.071 dB

Peak SAR (extrapolated) = 0.747 W/kg

SAR(1 g) = 0.486 mW/g; SAR(10 g) = 0.310 mW/g

Maximum value of SAR (measured) = 0.510 mW/g

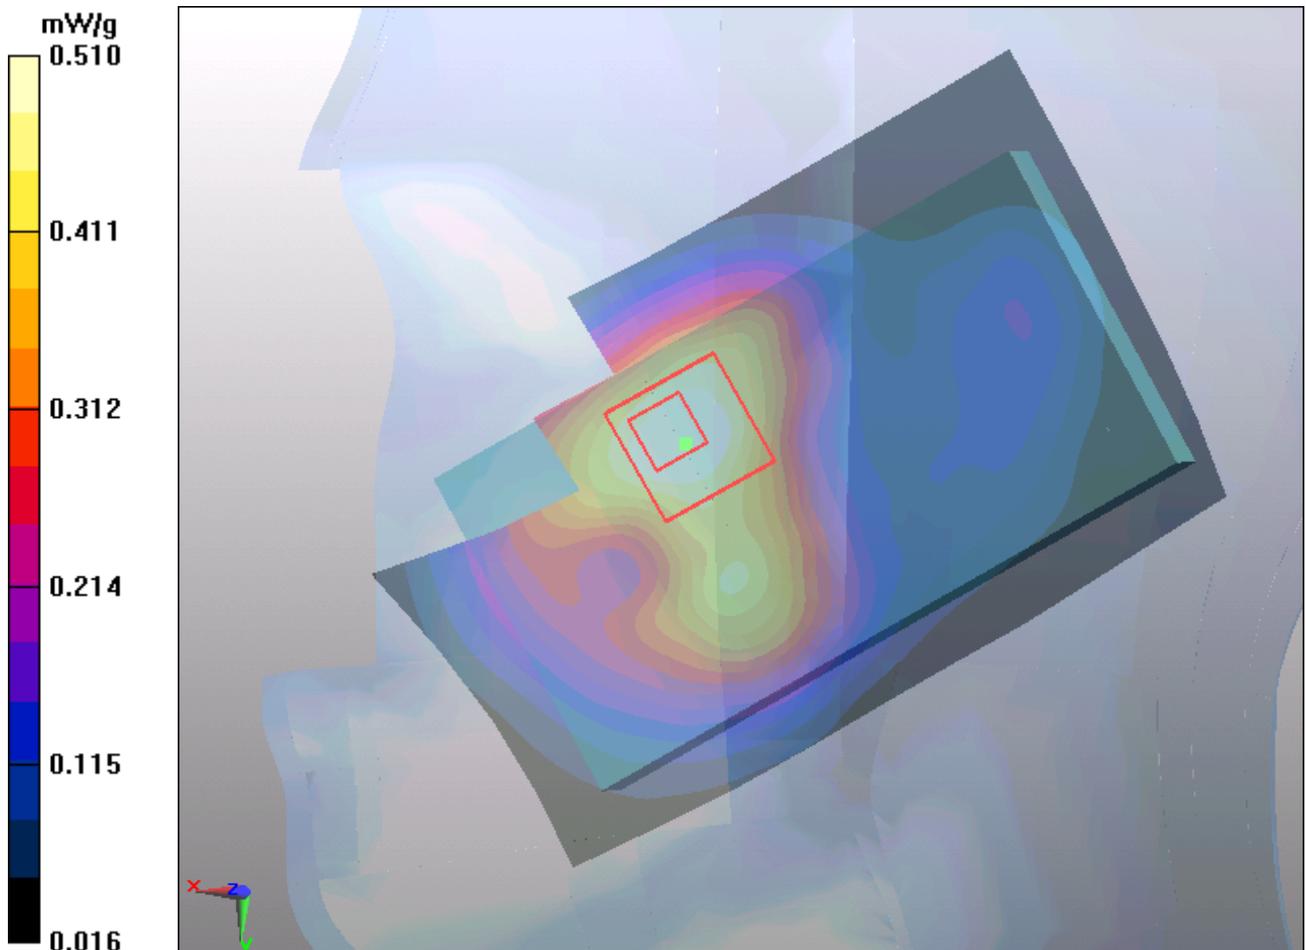


Figure 47 Right Hand Touch Cheek GSM 1900 Channel 661

GSM 1900 Right Tilt Middle

Date/Time: 4/10/2012 10:46:25 PM

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.90, 7.90, 7.90) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.320 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.1 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.454 W/kg

SAR(1 g) = 0.278 mW/g; SAR(10 g) = 0.160 mW/g

Maximum value of SAR (measured) = 0.308 mW/g

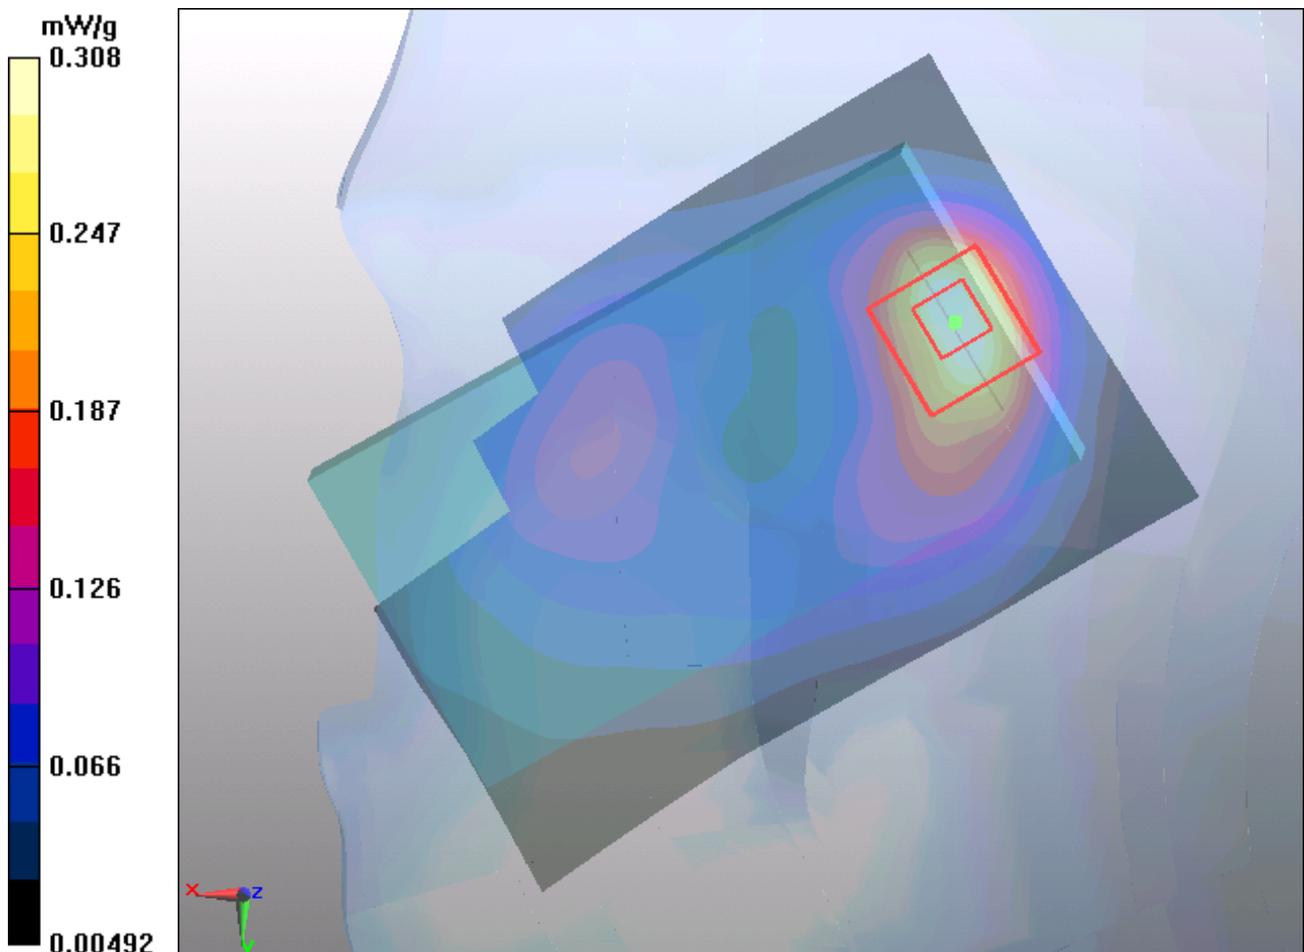


Figure 48 Right Hand Tilt 15° GSM 1900 Channel 661

GSM 1900 GPRS (1Txslot) Back Side Middle

Date/Time: 4/11/2012 4:28:02 PM

Communication System: GPRS 1TX; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.704 mW/g

Back Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.8 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.648 mW/g; SAR(10 g) = 0.389 mW/g

Maximum value of SAR (measured) = 0.682 mW/g

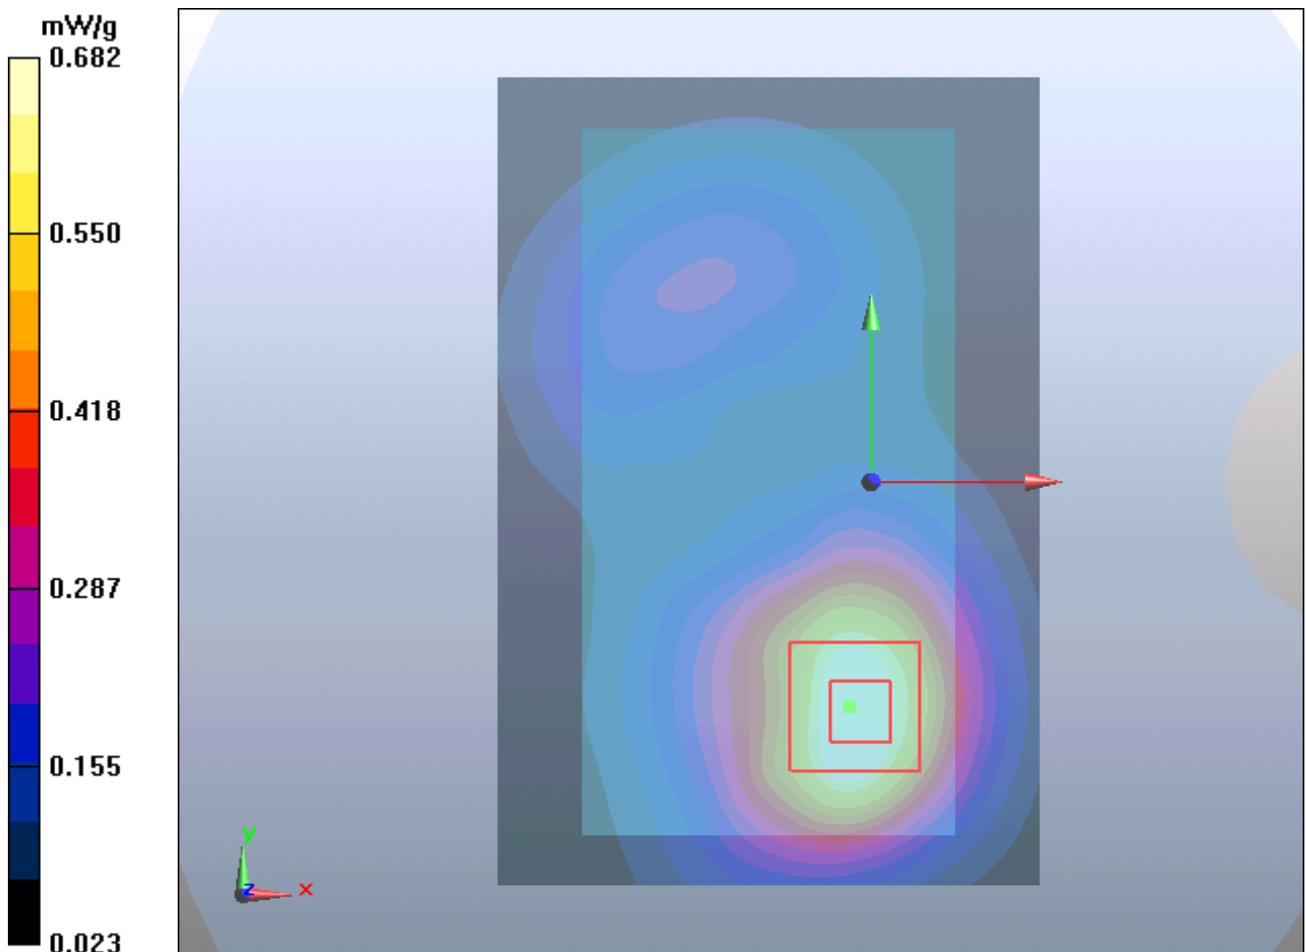


Figure 49 Body, Back Side, GSM 1900 GPRS (1Txslot) Channel 661

GSM 1900 GPRS (2Txslots) Back Side High

Date/Time: 4/11/2012 5:00:51 PM

Communication System: GPRS 2TX ; Frequency: 1909.8 MHz;Duty Cycle: 1:4.14954

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.930 mW/g

Back Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.93 V/m; Power Drift = -0.082 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.856 mW/g; SAR(10 g) = 0.512 mW/g

Maximum value of SAR (measured) = 0.902 mW/g

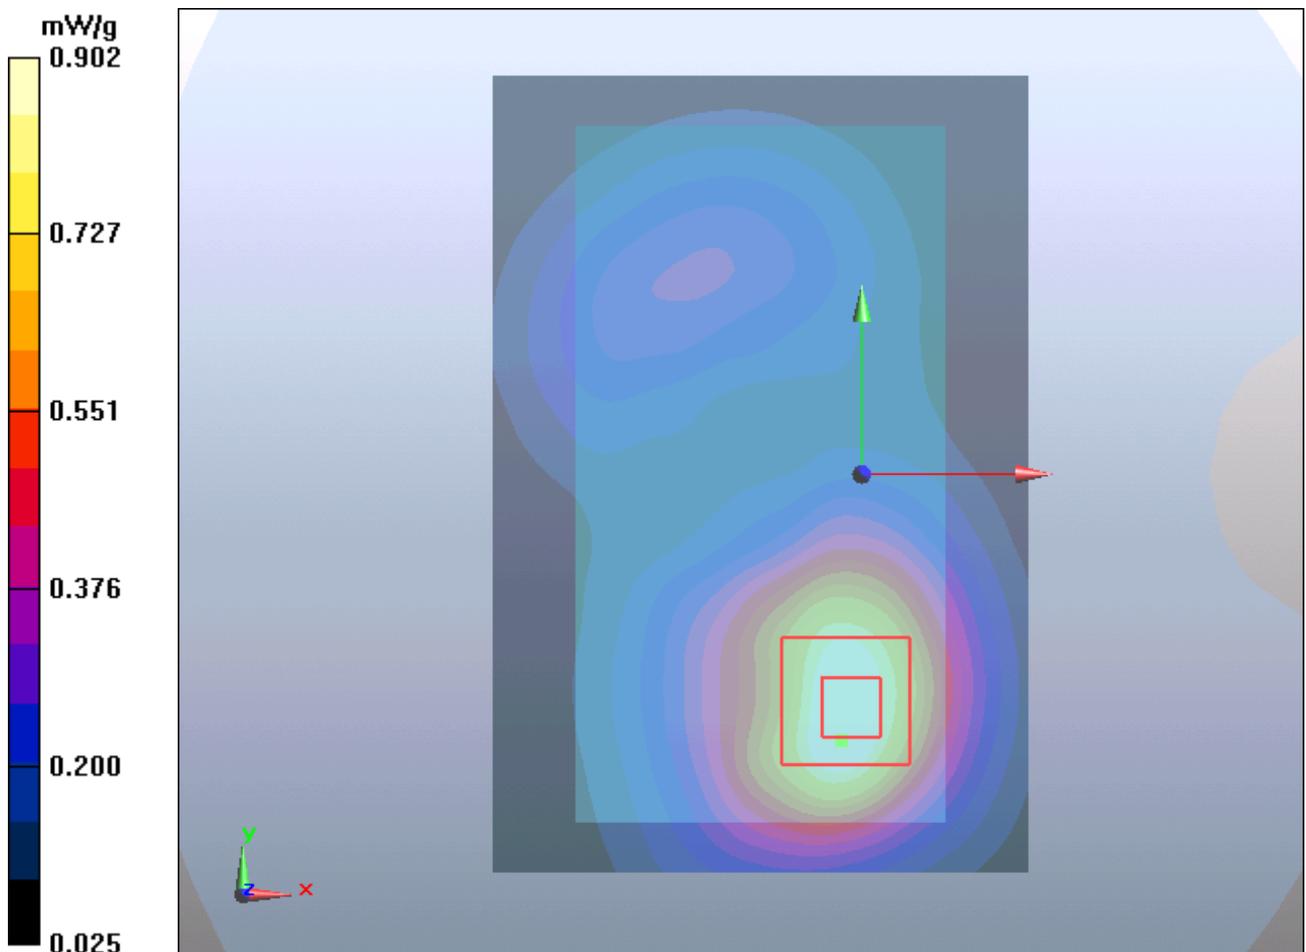


Figure 50 Body, Back Side, GSM 1900 GPRS (2Txslots) Channel 810

GSM 1900 GPRS (2Txslots) Back Side Middle

Date/Time: 4/11/2012 4:44:34 PM

Communication System: GPRS 2TX ; Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.01 mW/g

Back Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.54 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.915 mW/g; SAR(10 g) = 0.549 mW/g

Maximum value of SAR (measured) = 0.966 mW/g

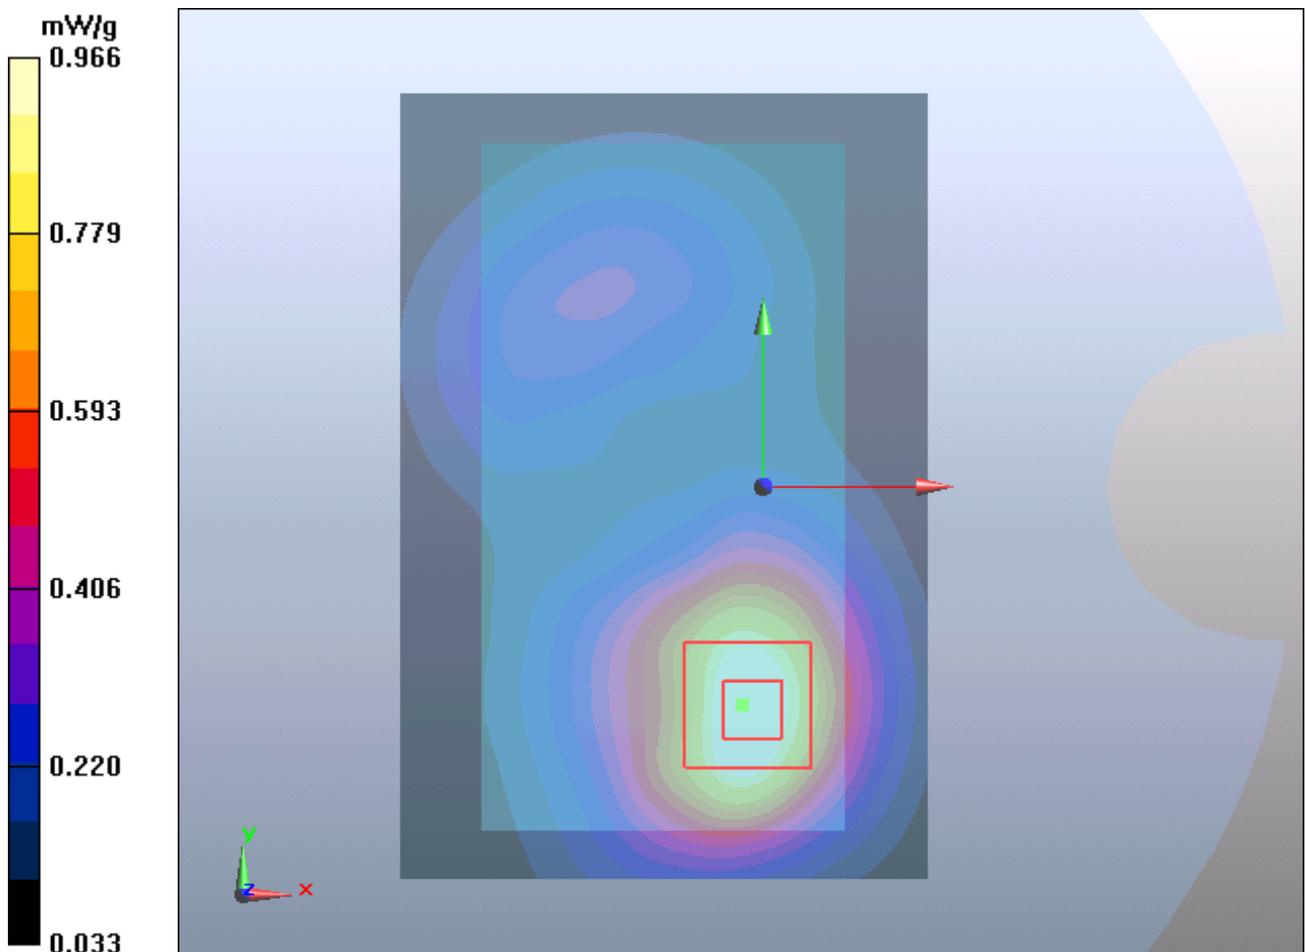


Figure 51 Body, Back Side, GSM 1900 GPRS (2Txslots) Channel 661

GSM 1900 GPRS (2Txslots) Back Side Low

Date/Time: 4/11/2012 5:16:48 PM

Communication System: GPRS 2TX ; Frequency: 1850.2 MHz;Duty Cycle: 1:4.14954

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.797 mW/g

Back Side Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.59 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.739 mW/g; SAR(10 g) = 0.441 mW/g

Maximum value of SAR (measured) = 0.777 mW/g

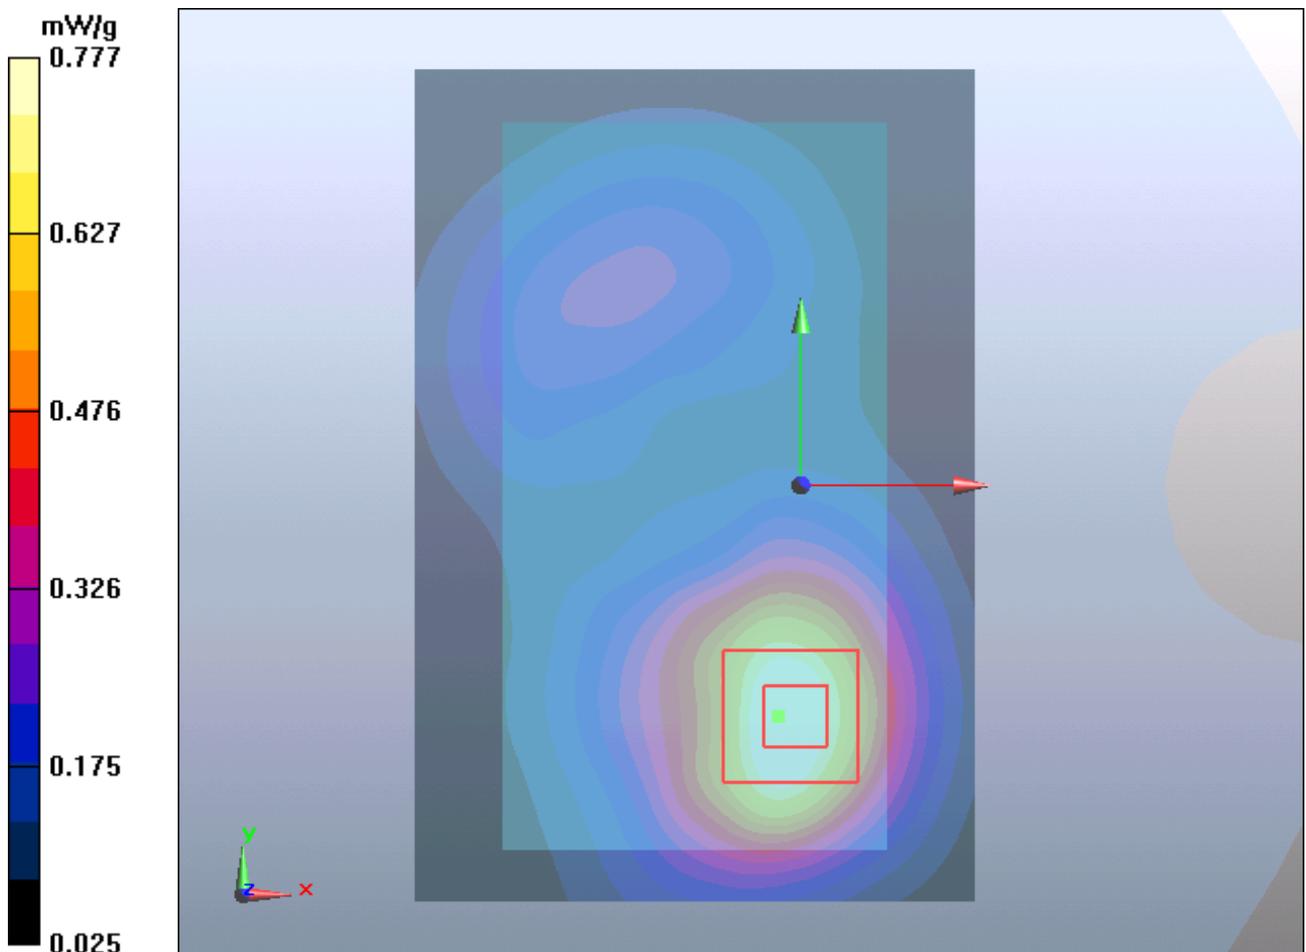


Figure 52 Body, Back Side, GSM 1900 GPRS (2Txslots) Channel 512

GSM 1900 GPRS (3Txslots) Back Side High

Date/Time: 4/11/2012 6:22:15 PM

Communication System: GPRS 3TX; Frequency: 1909.8 MHz; Duty Cycle: 1:2.76694

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.899 mW/g

Back Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.93 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.827 mW/g; SAR(10 g) = 0.497 mW/g

Maximum value of SAR (measured) = 0.861 mW/g

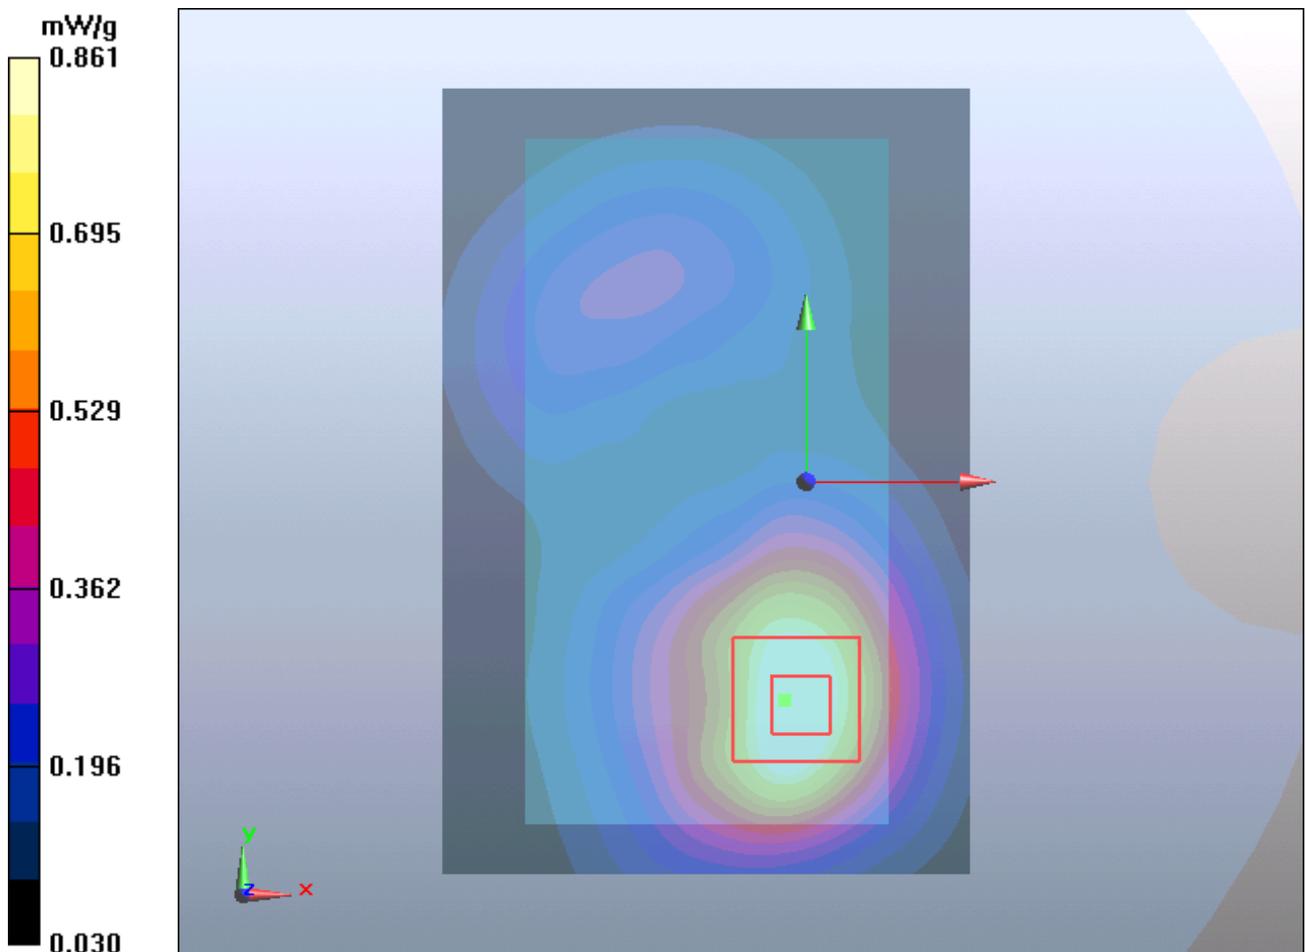


Figure 53 Body, Back Side, GSM 1900 GPRS (3Txslots) Channel 810

GSM 1900 GPRS (3Txslots) Back Side Middle

Date/Time: 4/11/2012 6:06:13 PM

Communication System: GPRS 3TX; Frequency: 1880 MHz; Duty Cycle: 1:2.76694

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.960 mW/g

Back Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.44 V/m; Power Drift = -0.123 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.889 mW/g; SAR(10 g) = 0.531 mW/g

Maximum value of SAR (measured) = 0.948 mW/g

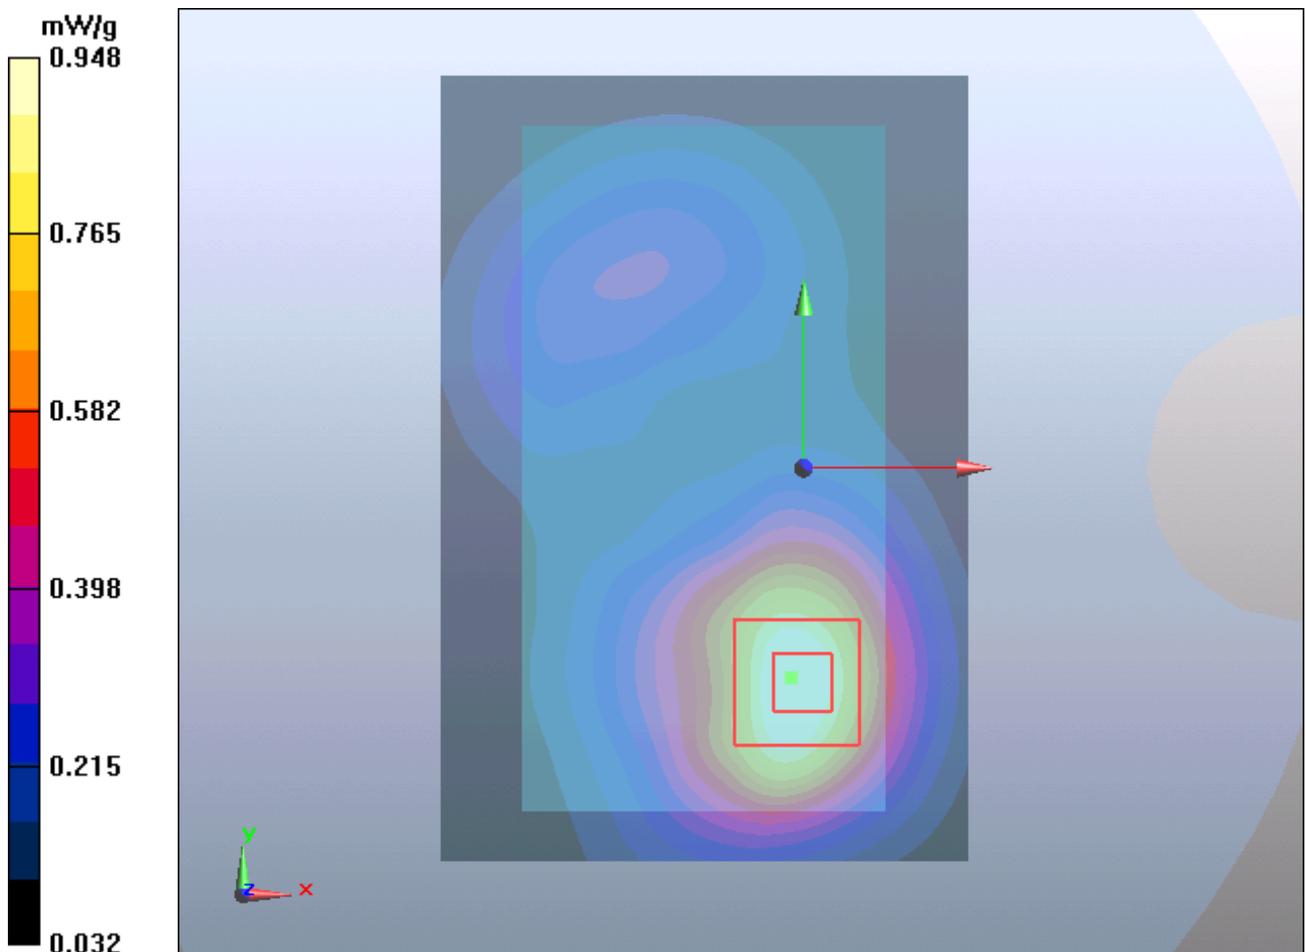


Figure 54 Body, Back Side, GSM 1900 GPRS (3Txslots) Channel 661

GSM 1900 GPRS (3Txslots) Back Side Low

Date/Time: 4/11/2012 6:38:05 PM

Communication System: GPRS 3TX; Frequency: 1850.2 MHz; Duty Cycle: 1:2.76694

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.768 mW/g

Back Side Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.47 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.712 mW/g; SAR(10 g) = 0.423 mW/g

Maximum value of SAR (measured) = 0.758 mW/g

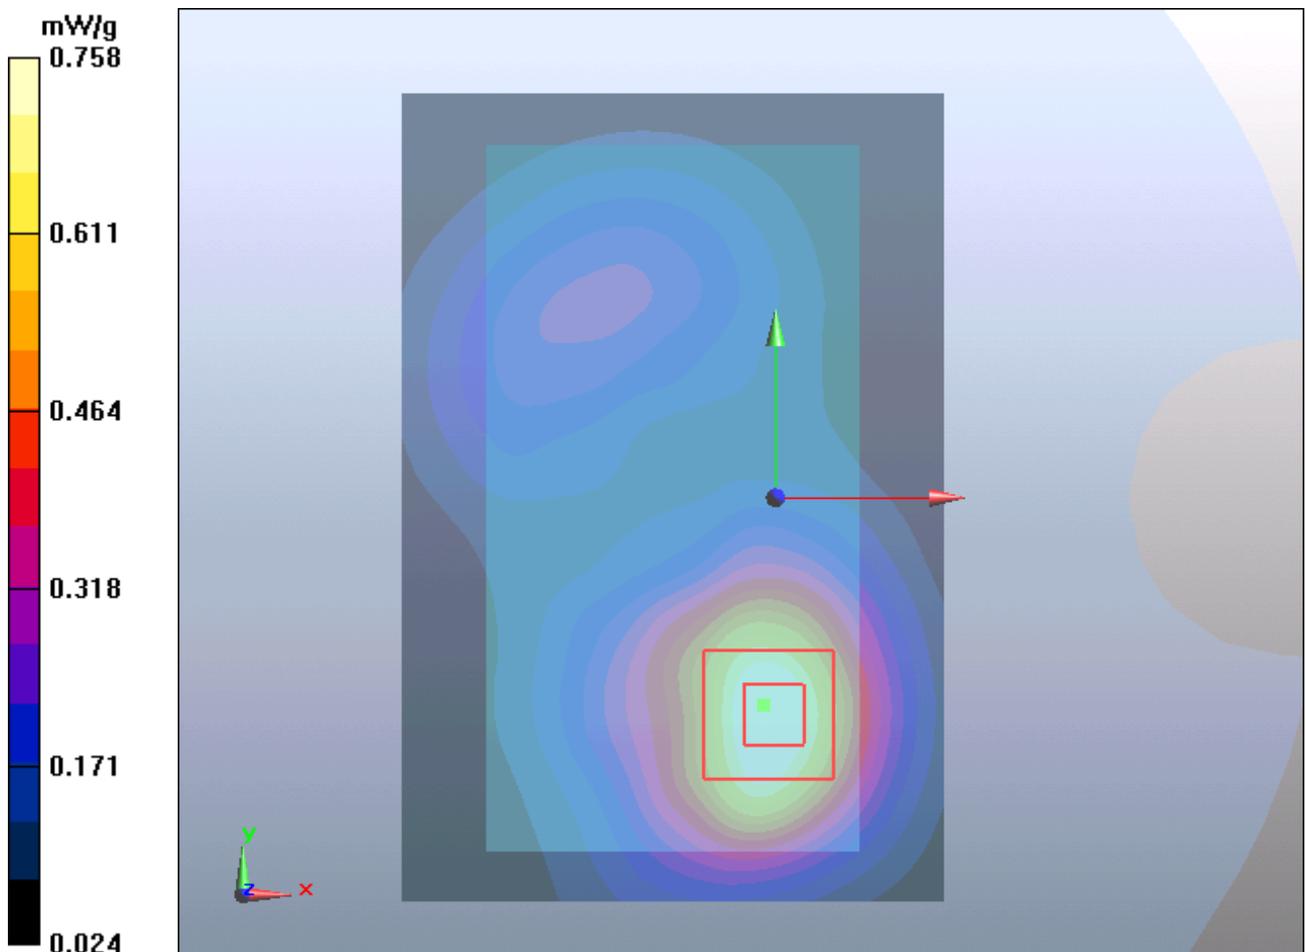


Figure 55 Body, Back Side, GSM 1900 GPRS (3Txslots) Channel 512

GSM 1900 GPRS (4Txslots) Back Side Middle

Date/Time: 4/11/2012 6:54:11 PM

Communication System: GPRS 4TX; Frequency: 1880 MHz; Duty Cycle: 1:2.07491

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.828 mW/g

Back Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.64 V/m; Power Drift = 0.051 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.768 mW/g; SAR(10 g) = 0.459 mW/g

Maximum value of SAR (measured) = 0.819 mW/g

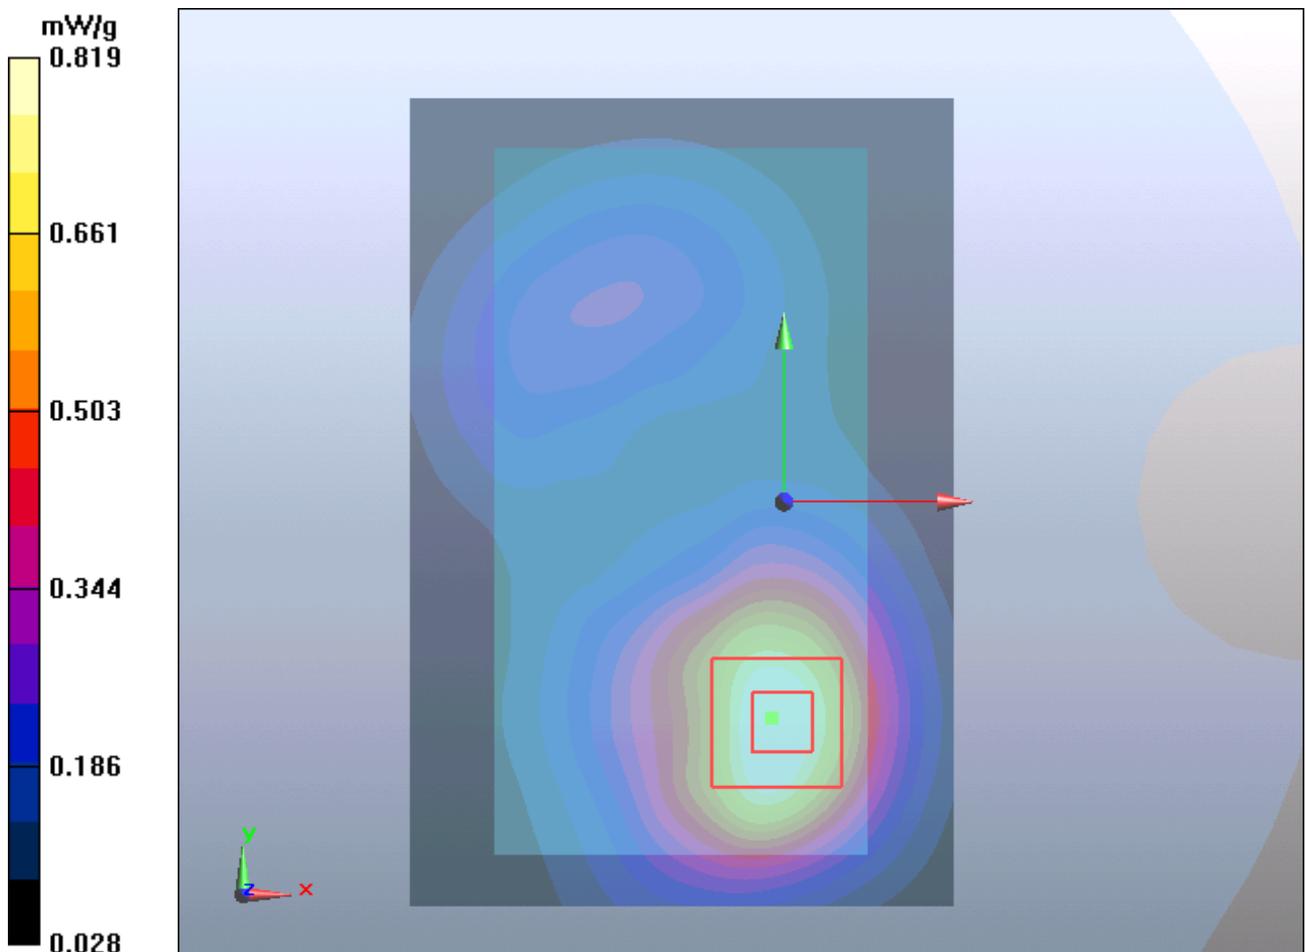


Figure 56 Body, Back Side, GSM 1900 GPRS (4Txslots) Channel 661

GSM 1900 GPRS (2Txslots) Front Side High

Date/Time: 4/11/2012 7:47:42 PM

Communication System: GPRS 2TX ; Frequency: 1909.8 MHz;Duty Cycle: 1:4.14954

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Front Side High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.841 mW/g

Front Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.84 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.783 mW/g; SAR(10 g) = 0.446 mW/g

Maximum value of SAR (measured) = 0.863 mW/g

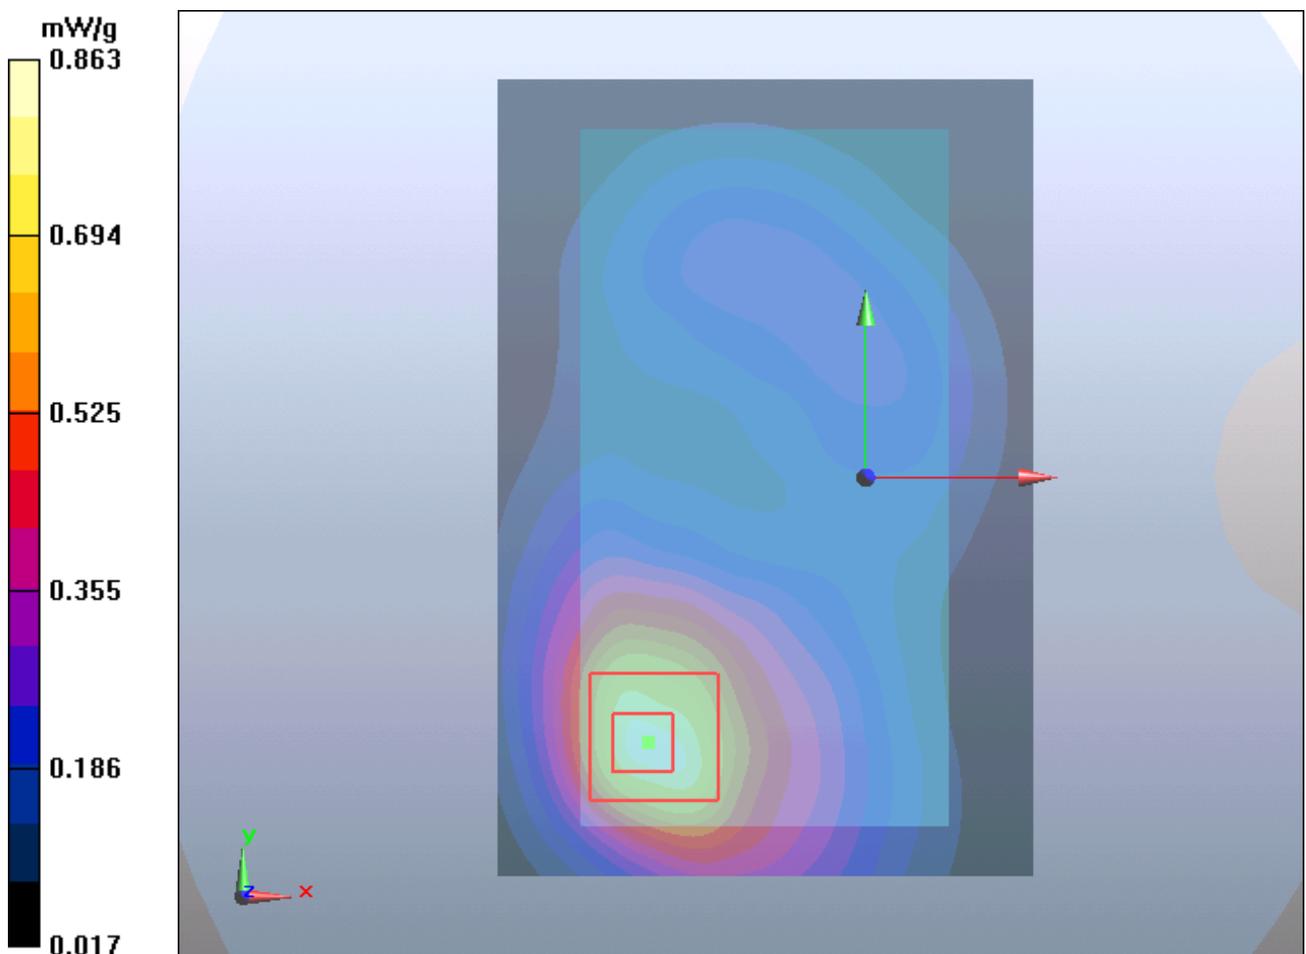


Figure 57 Body, Front Side, GSM 1900 GPRS (2Txslots) Channel 810

GSM 1900 GPRS (2Txslots) Front Side Middle

Date/Time: 4/11/2012 7:23:55 PM

Communication System: GPRS 2TX ; Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Front Side Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.866 mW/g

Front Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.28 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.806 mW/g; SAR(10 g) = 0.462 mW/g

Maximum value of SAR (measured) = 0.888 mW/g

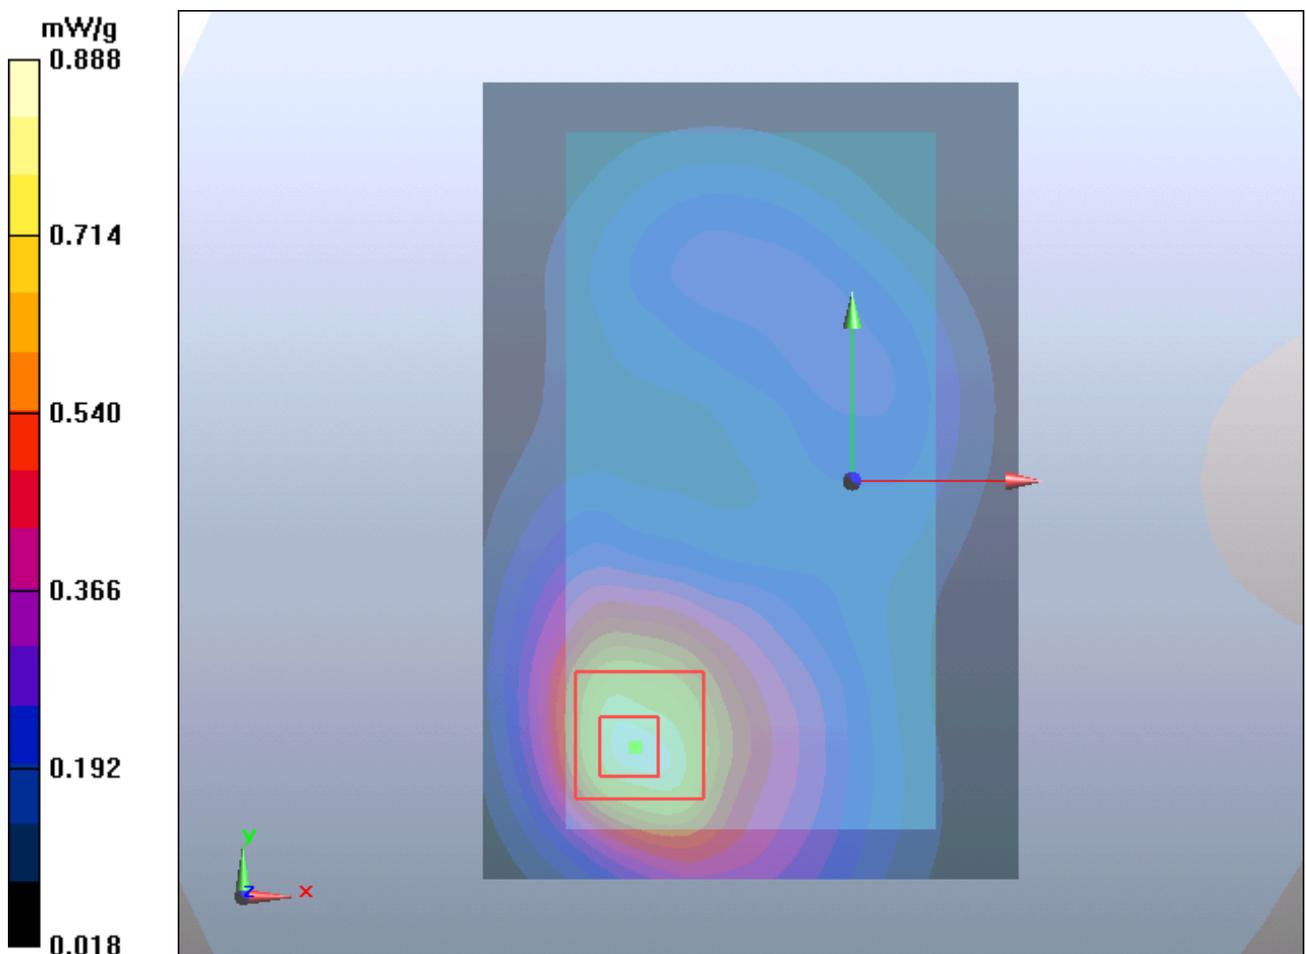


Figure 58 Body, Front Side, GSM 1900 GPRS (2Txslots) Channel 661

GSM 1900 GPRS (2Txslots) Front Side Low

Date/Time: 4/11/2012 8:03:22 PM

Communication System: GPRS 2TX ; Frequency: 1850.2 MHz;Duty Cycle: 1:4.14954

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Front Side Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.708 mW/g

Front Side Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.42 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.658 mW/g; SAR(10 g) = 0.375 mW/g

Maximum value of SAR (measured) = 0.728 mW/g

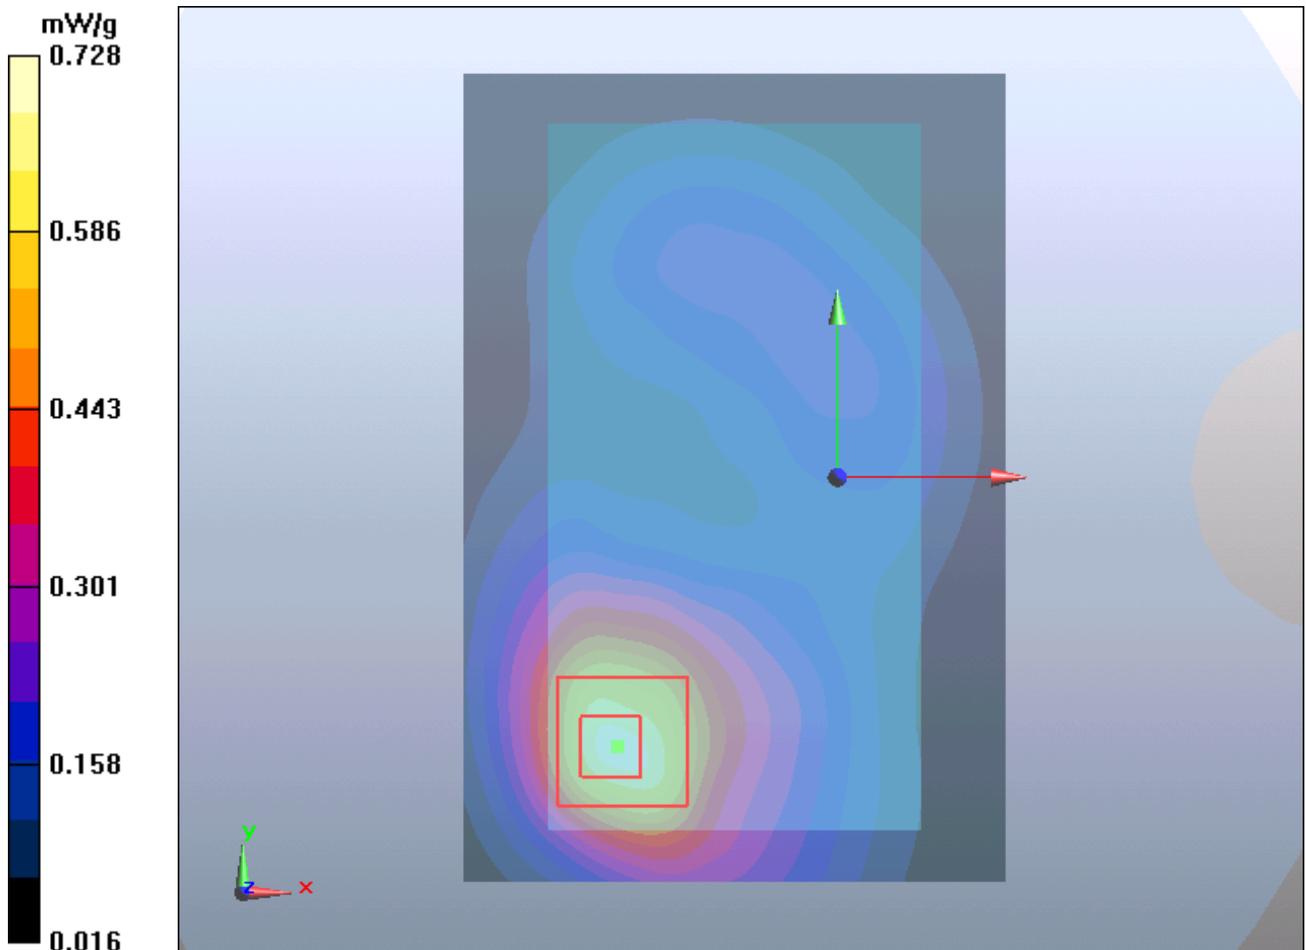


Figure 59 Body, Front Side, GSM 1900 GPRS (2Txslots) Channel 512

GSM 1900 GPRS (2Txslots) Left Edge Middle

Date/Time: 4/11/2012 9:14:29 PM

Communication System: GPRS 2TX ; Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Left Edge Middle/Area Scan (31x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.342 mW/g

Left Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 0.527 W/kg

SAR(1 g) = 0.310 mW/g; SAR(10 g) = 0.175 mW/g

Maximum value of SAR (measured) = 0.334 mW/g

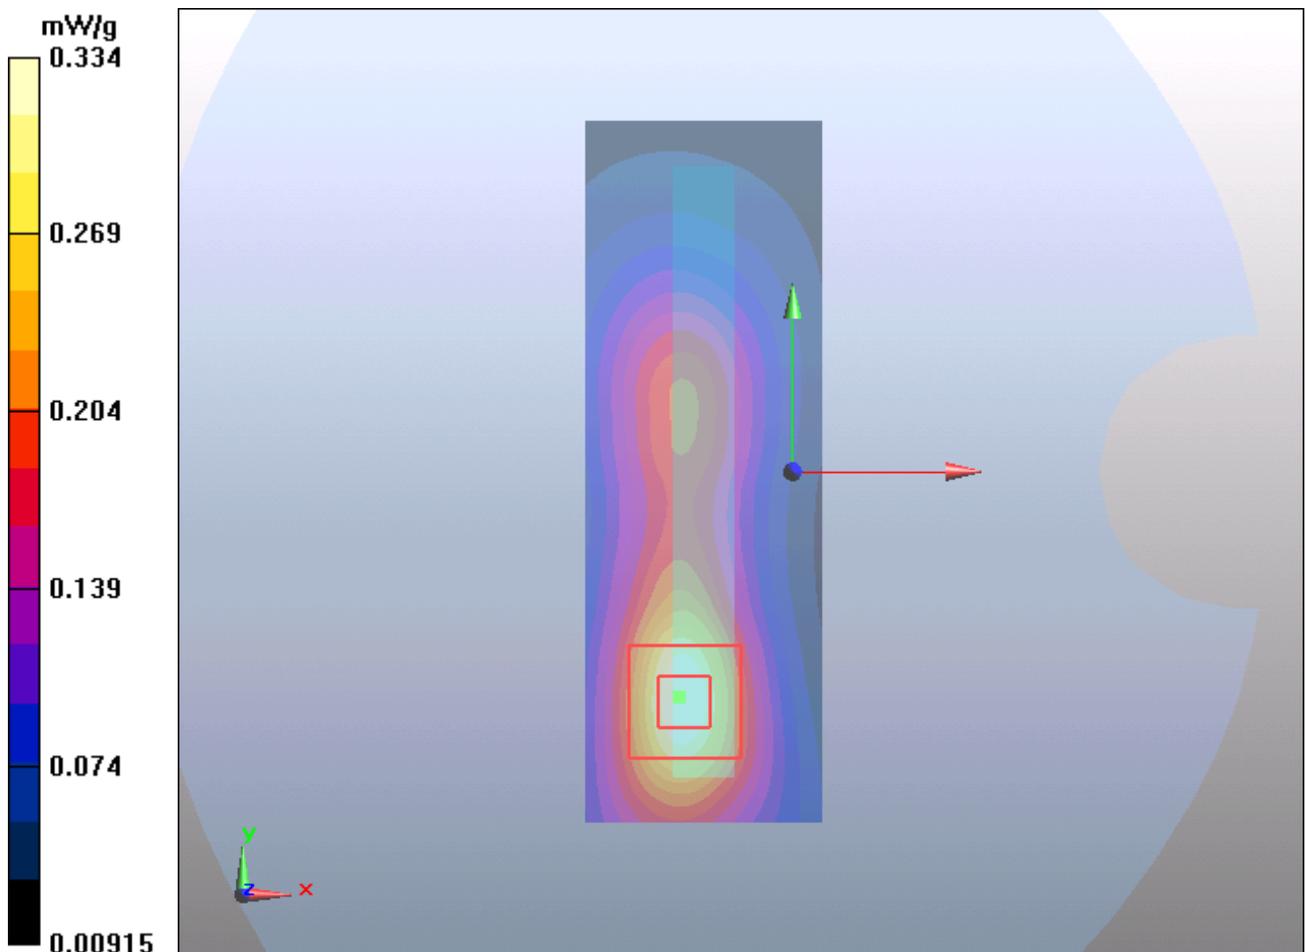


Figure 60 Body, Left Edge, GSM 1900 GPRS (2Txslots) Channel 661

GSM 1900 GPRS (2Txslots) Right Edge Middle

Date/Time: 4/11/2012 9:28:34 PM

Communication System: GPRS 2TX ; Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Right Edge Middle/Area Scan (31x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.170 mW/g

Right Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.13 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.249 W/kg

SAR(1 g) = 0.151 mW/g; SAR(10 g) = 0.087 mW/g

Maximum value of SAR (measured) = 0.165 mW/g

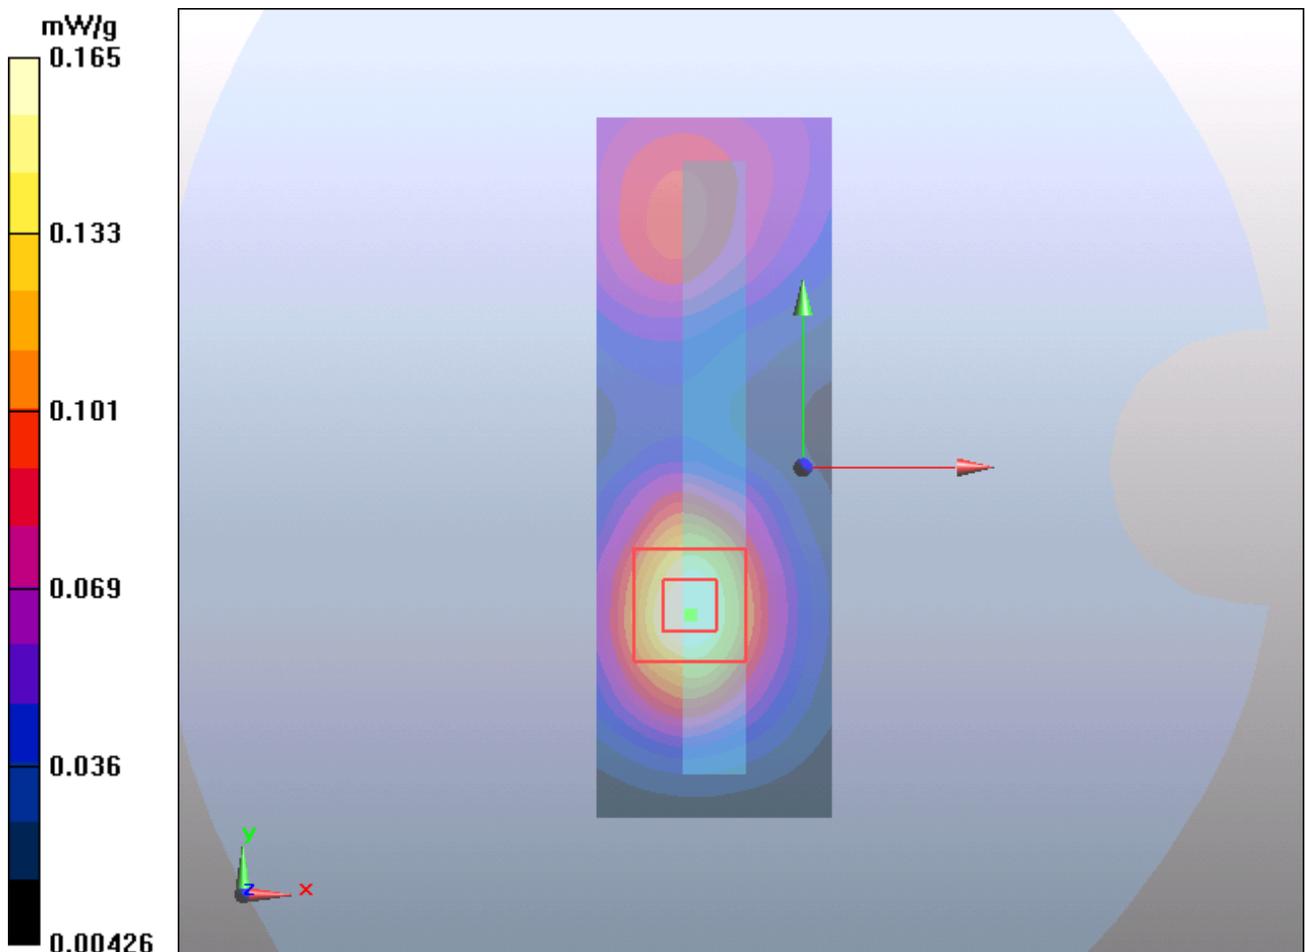


Figure 61 Body, Right Edge, GSM 1900 GPRS (2Txslots) Channel 661

GSM 1900 GPRS (2Txslots) Bottom Edge Middle

Date/Time: 4/11/2012 9:56:27 PM

Communication System: GPRS 2TX ; Frequency: 1880 MHz;Duty Cycle: 1:4.14954

Medium parameters used: f = 1880 MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Bottom Edge Middle/Area Scan (31x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.460 mW/g

Bottom Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.4 V/m; Power Drift = 0.182 dB

Peak SAR (extrapolated) = 0.712 W/kg

SAR(1 g) = 0.421 mW/g; SAR(10 g) = 0.241 mW/g

Maximum value of SAR (measured) = 0.465 mW/g

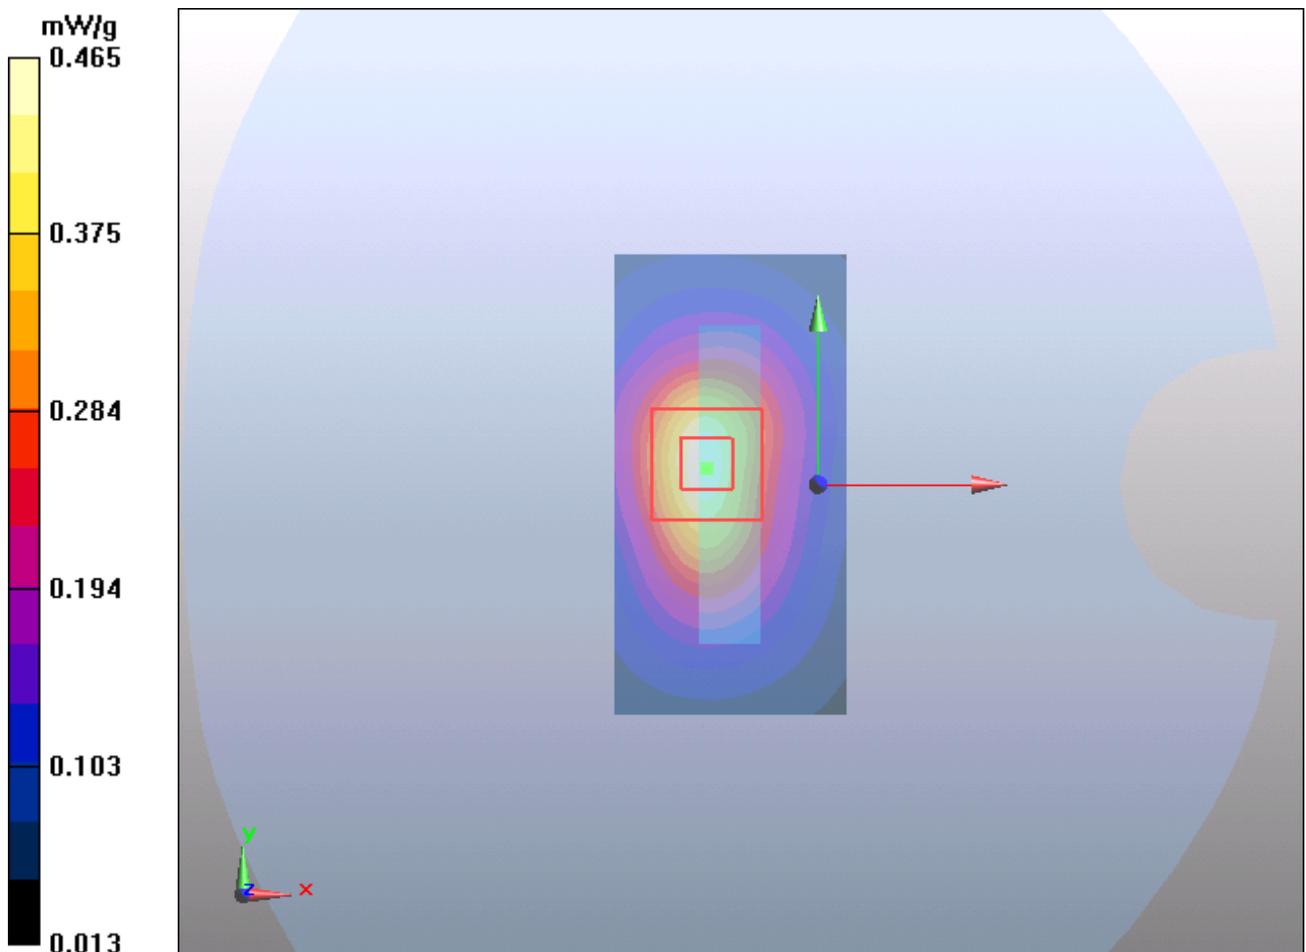


Figure 62 Body, Bottom Edge, GSM 1900 GPRS (2Txslots) Channel 661

GSM 1900 with Earphone Back Side Middle

Date/Time: 4/11/2012 8:47:55 PM

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.787 mW/g

Back Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.61 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.714 mW/g; SAR(10 g) = 0.427 mW/g

Maximum value of SAR (measured) = 0.757 mW/g

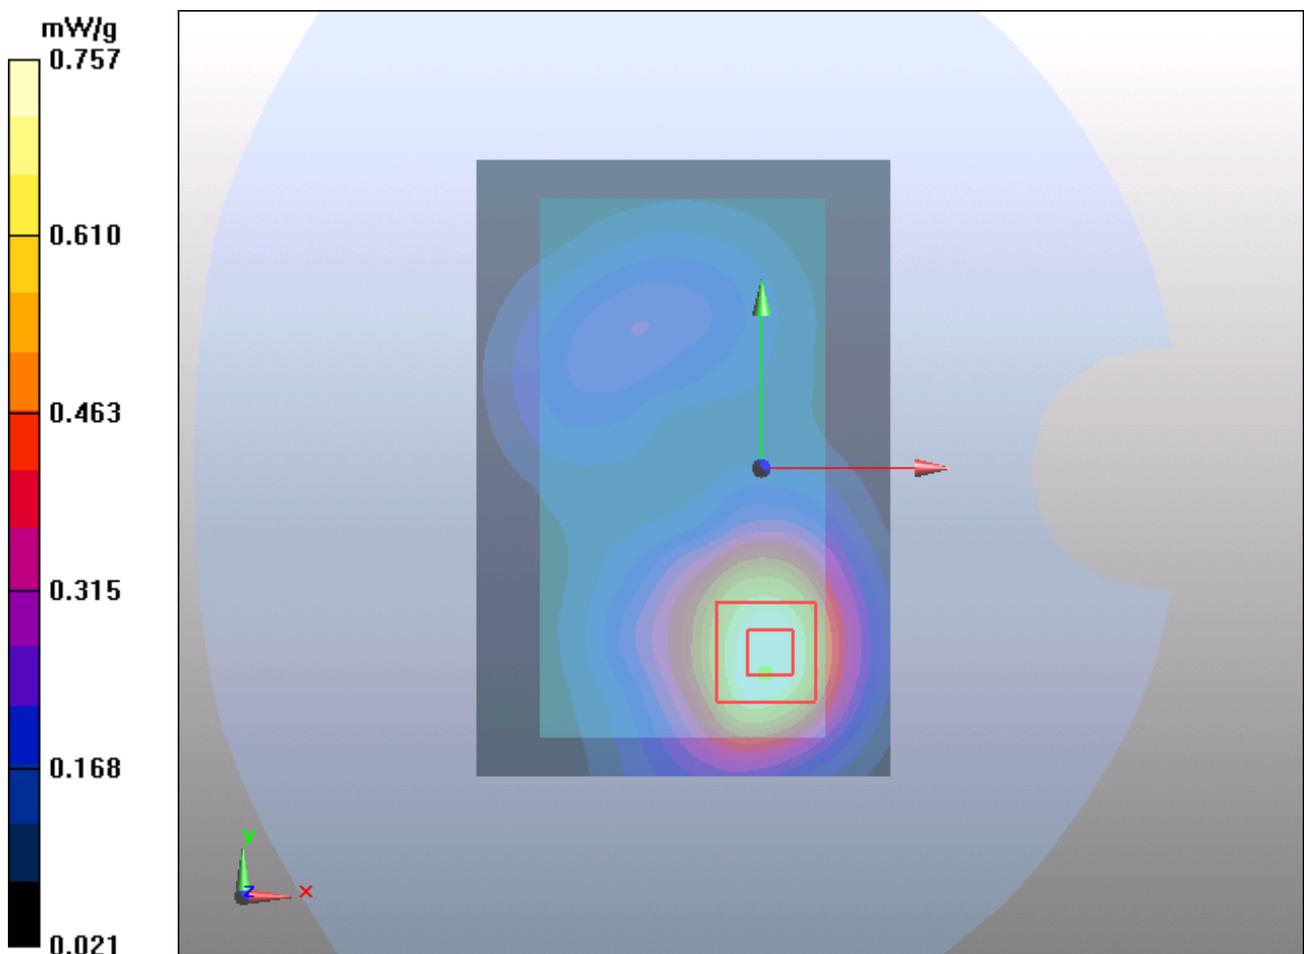


Figure 63 Body with Earphone, Back Side, GSM 1900 Channel 661

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1203-0414SAR01R2

Page 121 of 250

GSM 1900 EGPRS (2Txslots) Back Side Middle

Date/Time: 4/11/2012 8:26:34 PM

Communication System: EGPRS 2TX; Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.06 mW/g


Back Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.4 V/m; Power Drift = 0.133 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.992 mW/g; SAR(10 g) = 0.596 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

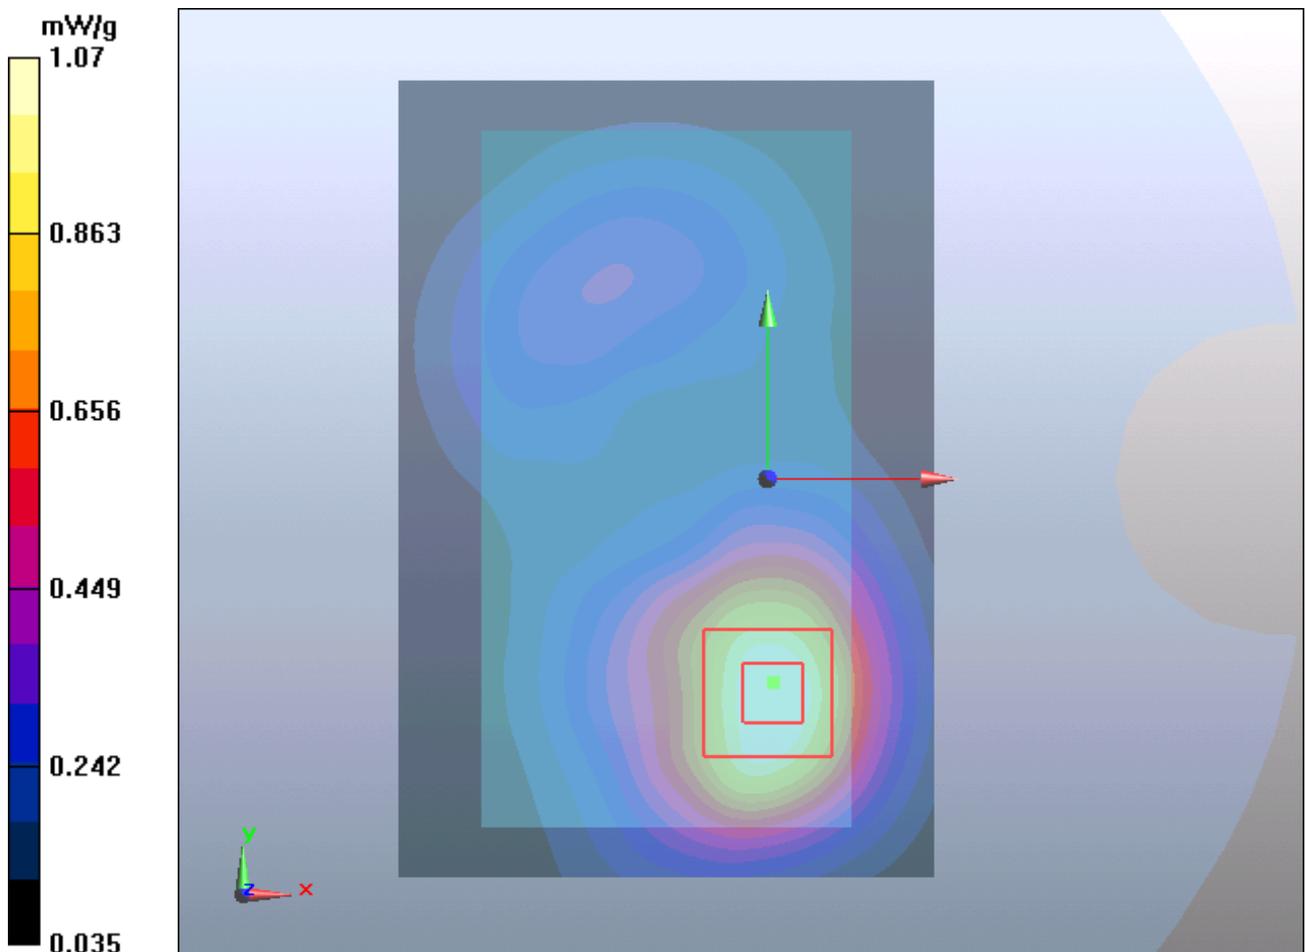

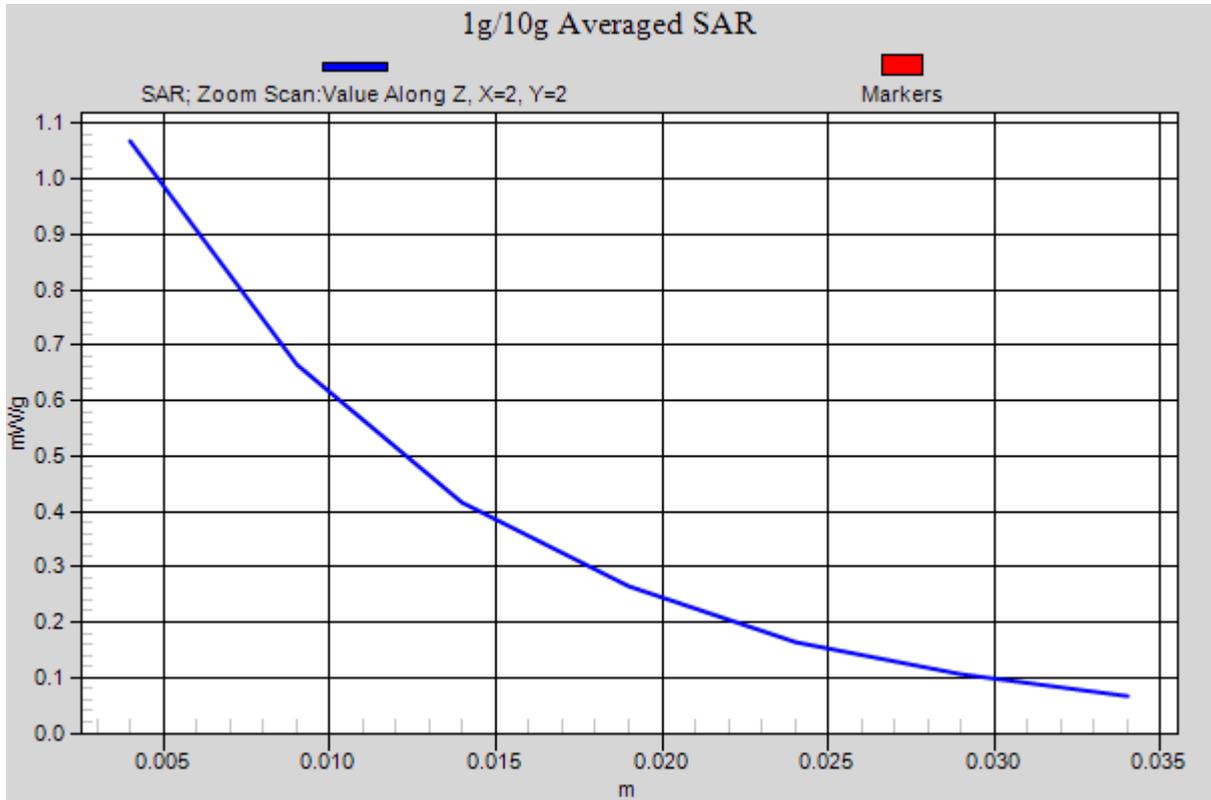


Figure 64 Body, Back Side, GSM 1900 EGPRS (2Txslots) Channel 661

WCDMA Band II Left Cheek High

Date/Time: 6/11/2012 11:12:41 AM

Communication System: WCDMA ; Frequency: 1907.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.9, 7.9, 7.9); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Cheek High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.32 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.9 V/m; Power Drift = 0.093 dB

Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.697 mW/g

Maximum value of SAR (measured) = 1.36 mW/g

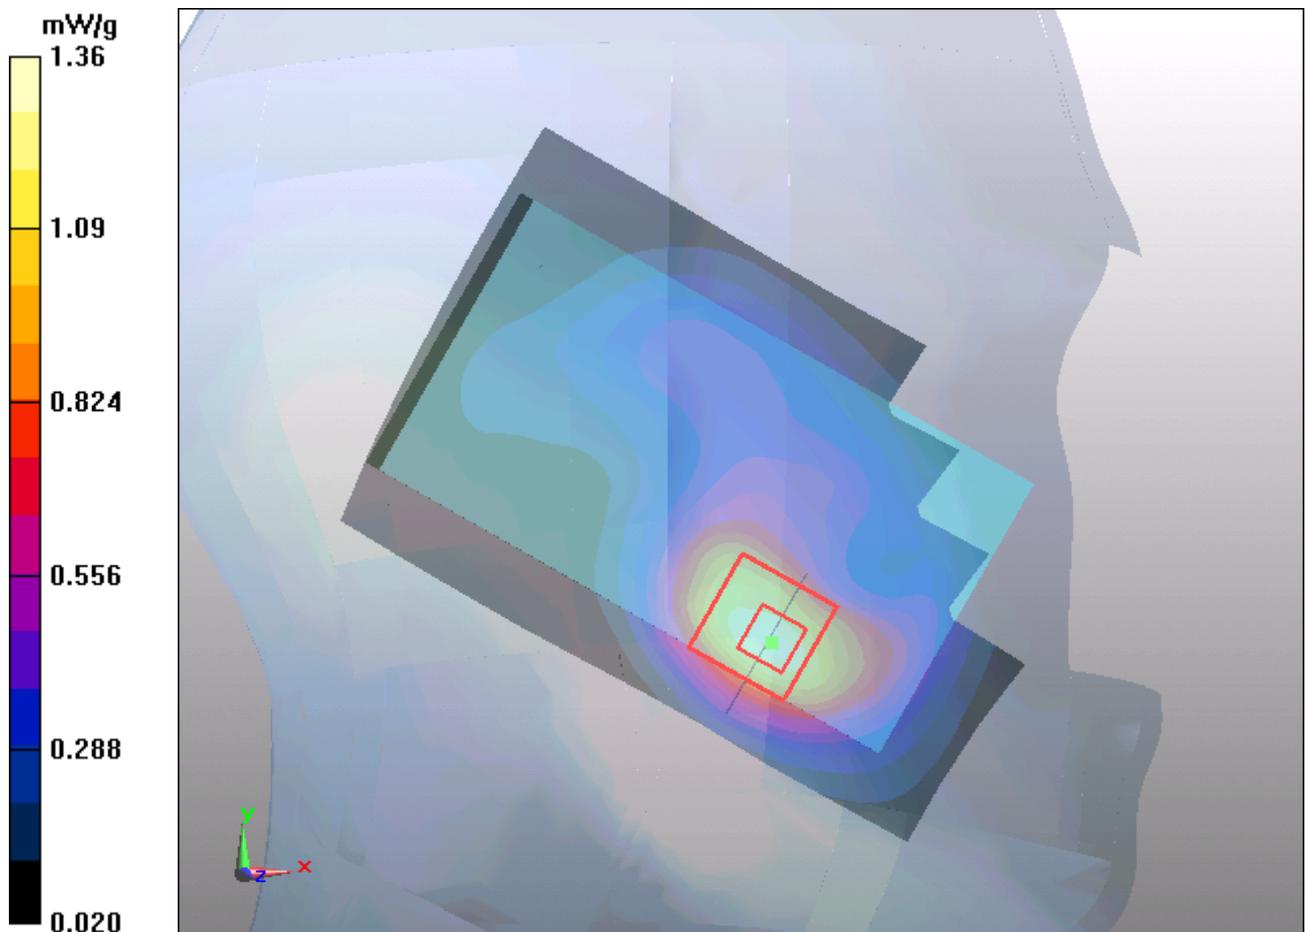


Figure 65 Left Hand Touch Cheek WCDMA Band II Channel 9538

WCDMA Band II Left Cheek Middle

Date/Time: 6/11/2012 10:56:30 AM

Communication System: WCDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.9, 7.9, 7.9); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.35 mW/g


Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = 0.129 dB

Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.707 mW/g

Maximum value of SAR (measured) = 1.37 mW/g

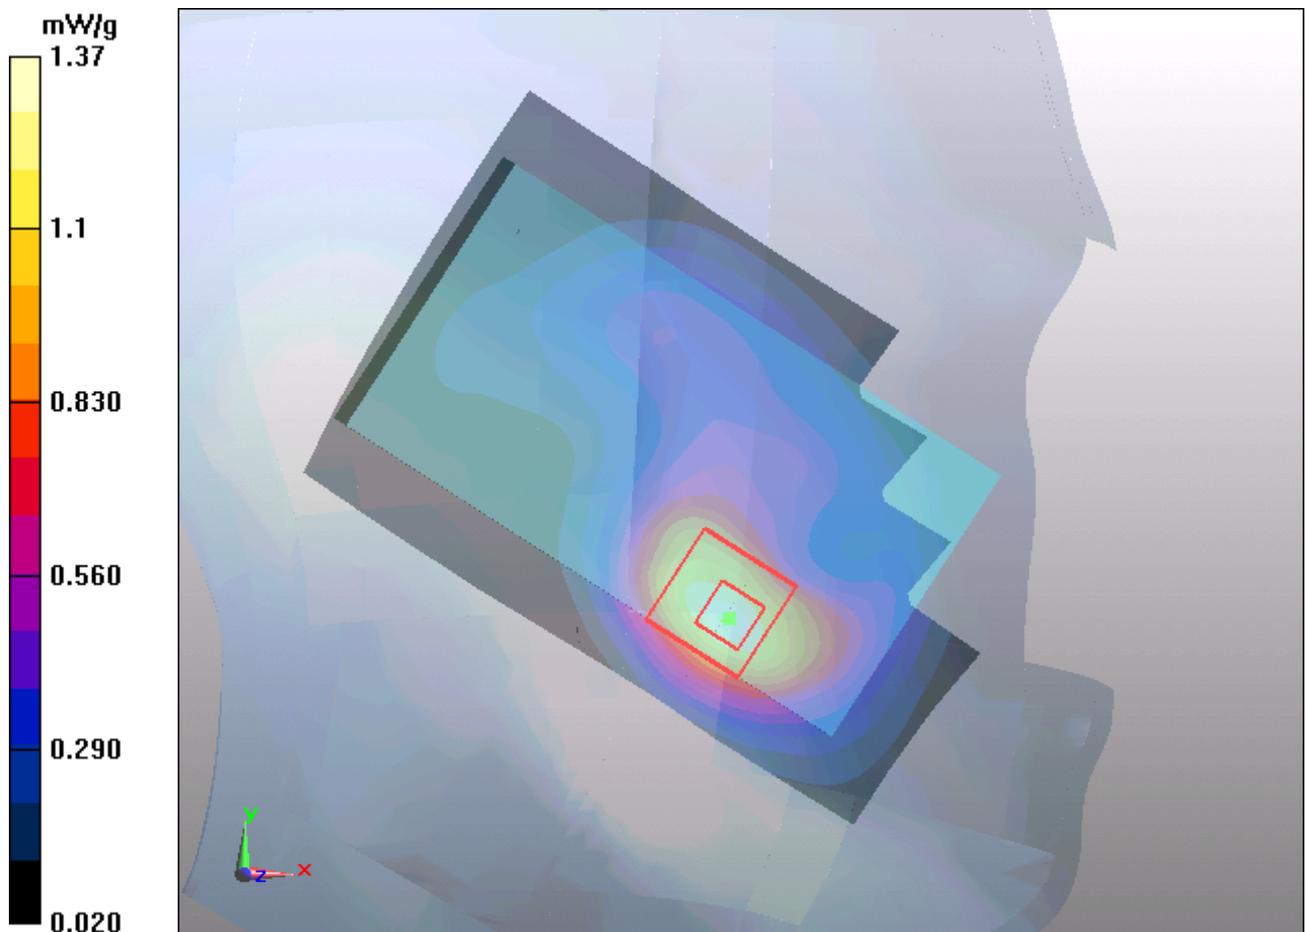

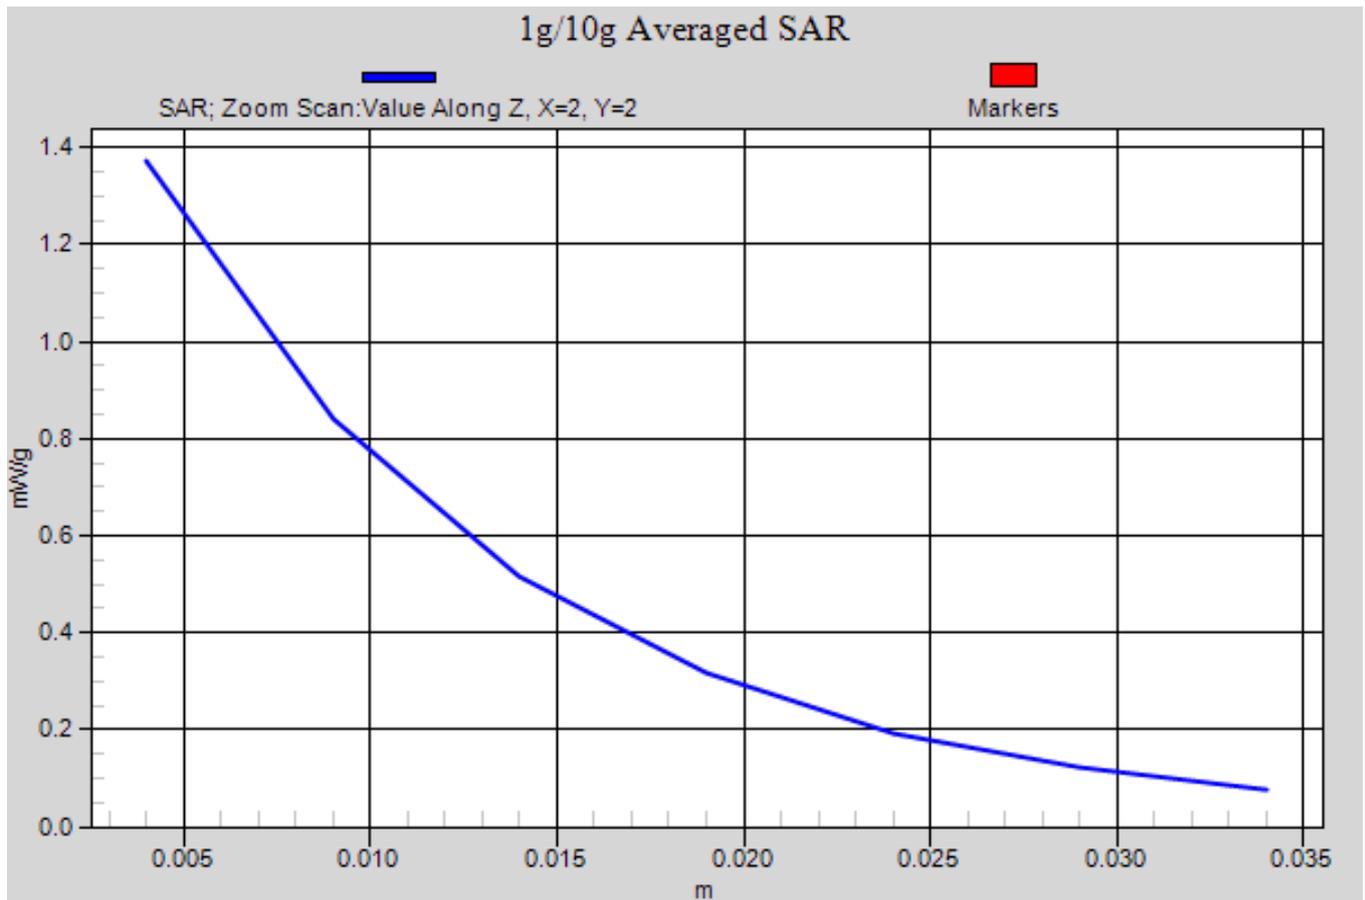


Figure 66 Left Hand Touch Cheek WCDMA Band II Channel 9400

WCDMA Band II Left Cheek Low

Date/Time: 6/11/2012 11:28:21 AM

Communication System: WCDMA ; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.9, 7.9, 7.9); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Cheek Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.22 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.6 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.638 mW/g

Maximum value of SAR (measured) = 1.23 mW/g

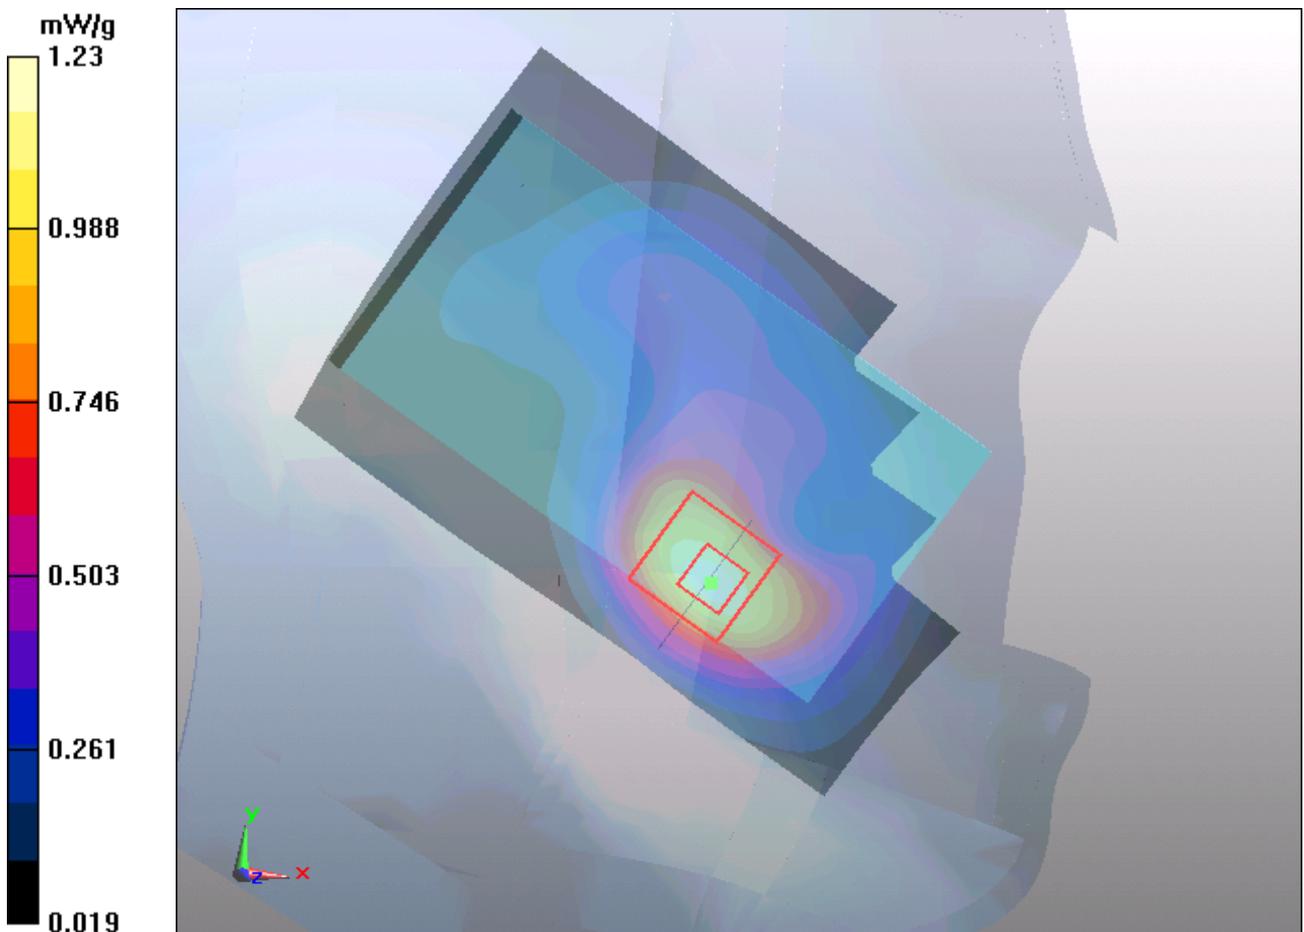


Figure 67 Left Hand Touch Cheek WCDMA Band II Channel 9262

WCDMA Band II Left Tilt Middle

Date/Time: 6/11/2012 11:44:30 AM

Communication System: WCDMA ; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.9, 7.9, 7.9); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.456 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.2 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 0.619 W/kg

SAR(1 g) = 0.383 mW/g; SAR(10 g) = 0.234 mW/g

Maximum value of SAR (measured) = 0.417 mW/g

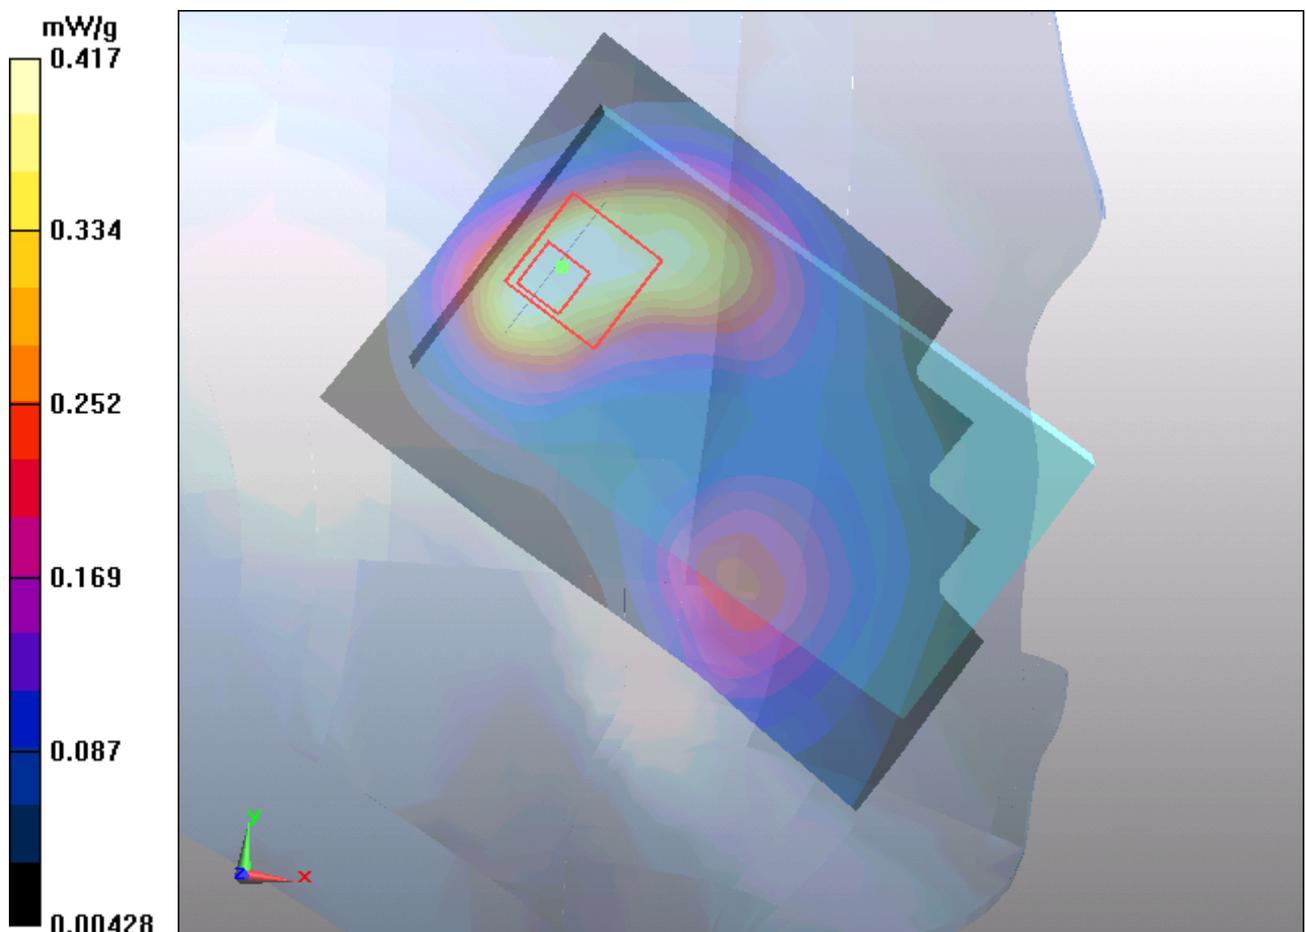


Figure 68 Left Hand Tilt 15° WCDMA Band II Channel 9400

TA Technology (Shanghai) Co., Ltd.
Test Report

WCDMA Band II Right Cheek Middle

Date/Time: 6/11/2012 12:01:31 PM

Communication System: WCDMA ; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.9, 7.9, 7.9); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.817 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.1 V/m; Power Drift = 0.184 dB

Peak SAR (extrapolated) = 0.990 W/kg

SAR(1 g) = 0.691 mW/g; SAR(10 g) = 0.447 mW/g

Maximum value of SAR (measured) = 0.742 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.1 V/m; Power Drift = 0.184 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.775 mW/g; SAR(10 g) = 0.490 mW/g

Maximum value of SAR (measured) = 0.823 mW/g

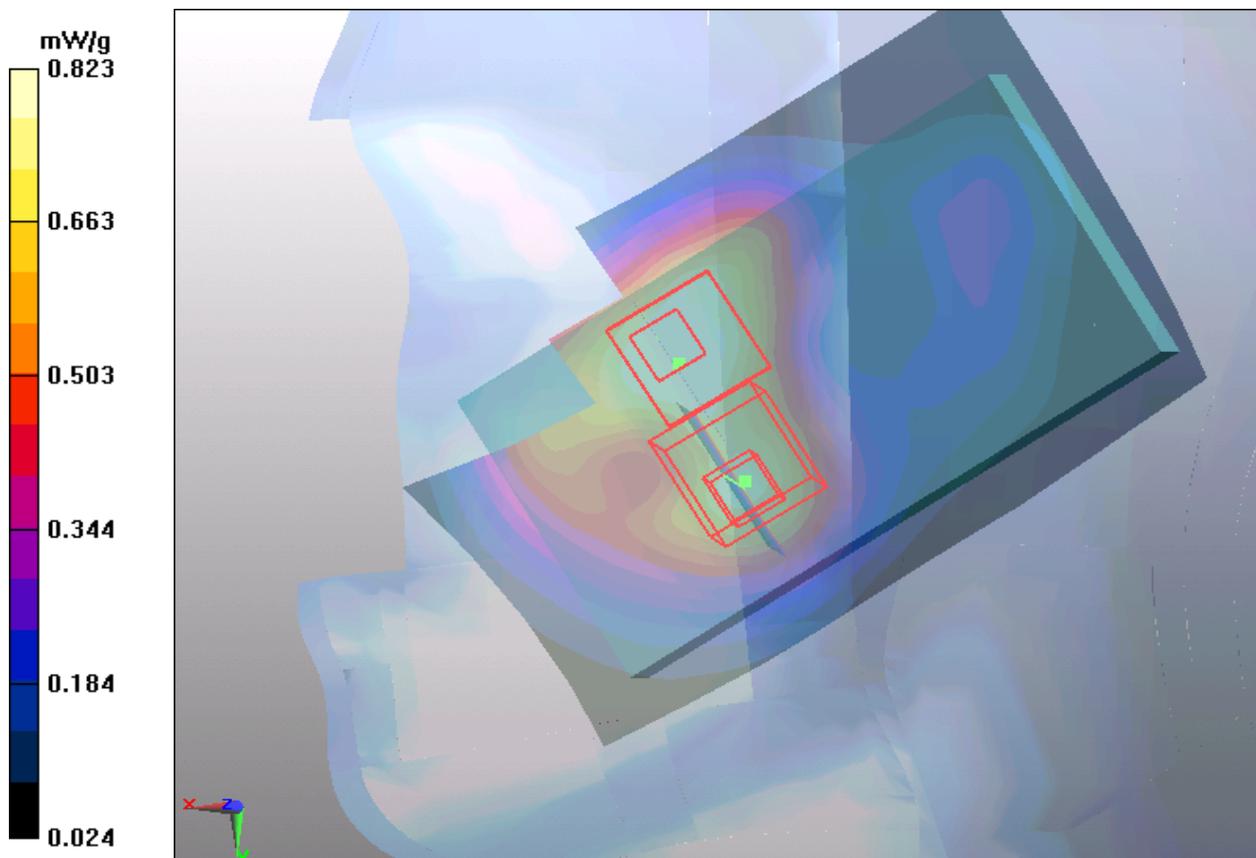


Figure 69 Right Hand Touch Cheek WCDMA Band II Channel 9400

WCDMA Band II Right Tilt Middle

Date/Time: 6/11/2012 12:24:22 PM

Communication System: WCDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.9, 7.9, 7.9); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.599 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.8 V/m; Power Drift = 0.128 dB

Peak SAR (extrapolated) = 0.860 W/kg

SAR(1 g) = 0.523 mW/g; SAR(10 g) = 0.299 mW/g

Maximum value of SAR (measured) = 0.586 mW/g

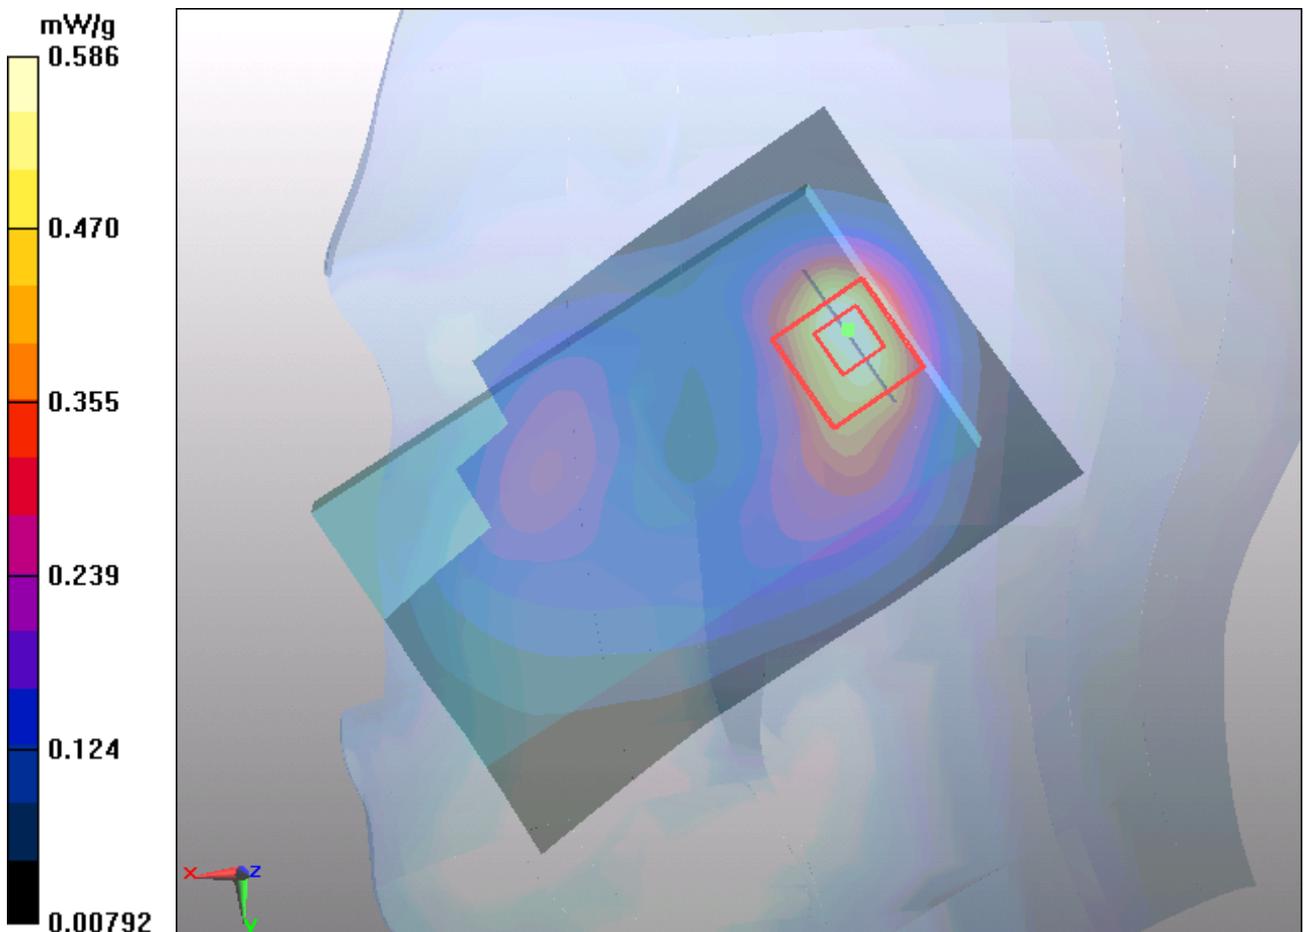


Figure 70 Right Hand Tilt 15° WCDMA Band II Channel 9400

WCDMA Band II Back Side High

Date/Time: 6/9/2012 7:49:47 PM

Communication System: WCDMA ; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.33 mW/g

Back Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.2 V/m; Power Drift = -0.159 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.715 mW/g

Maximum value of SAR (measured) = 1.27 mW/g

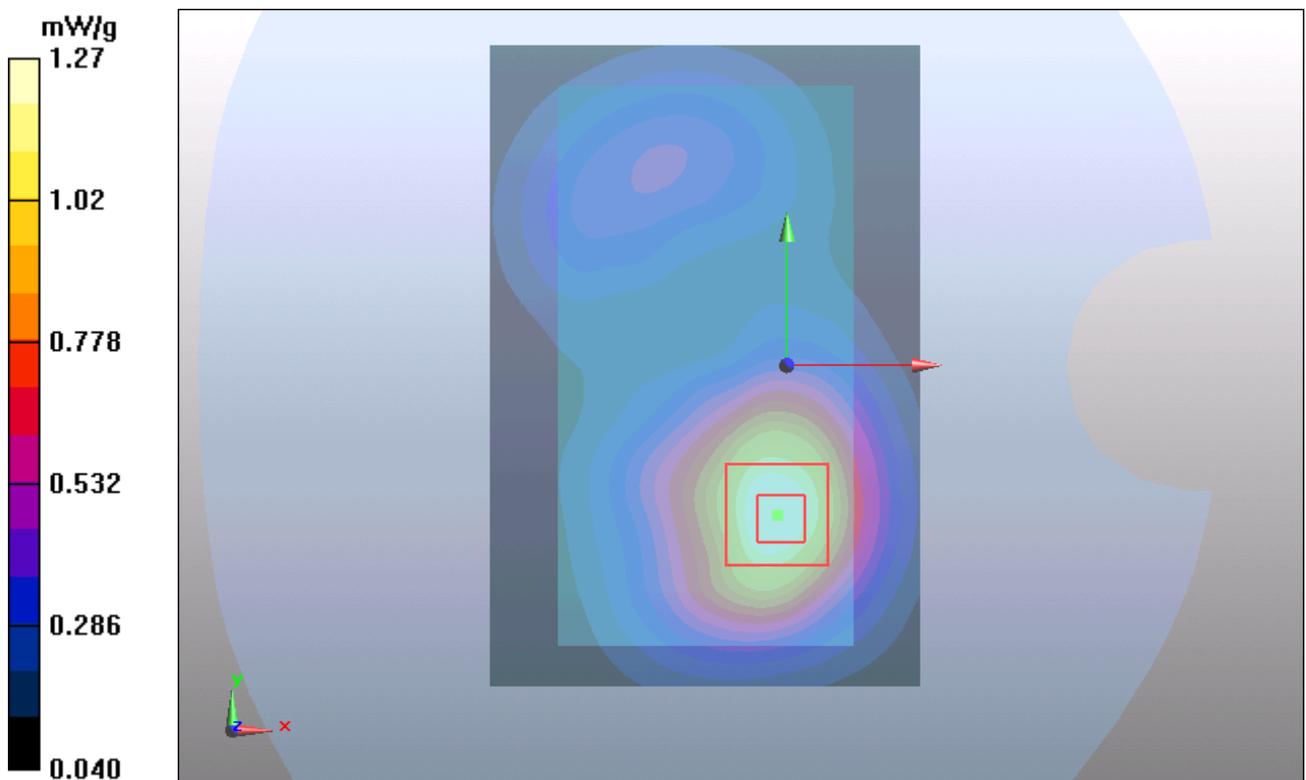


Figure 71 Body, Back Side, WCDMA Band II Channel 9538

WCDMA Band II Back Side Middle

Date/Time: 6/9/2012 7:18:09 PM

Communication System: WCDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: f = 1880 MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.33 mW/g

Back Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.6 V/m; Power Drift = -0.185 dB

Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.719 mW/g

Maximum value of SAR (measured) = 1.29 mW/g

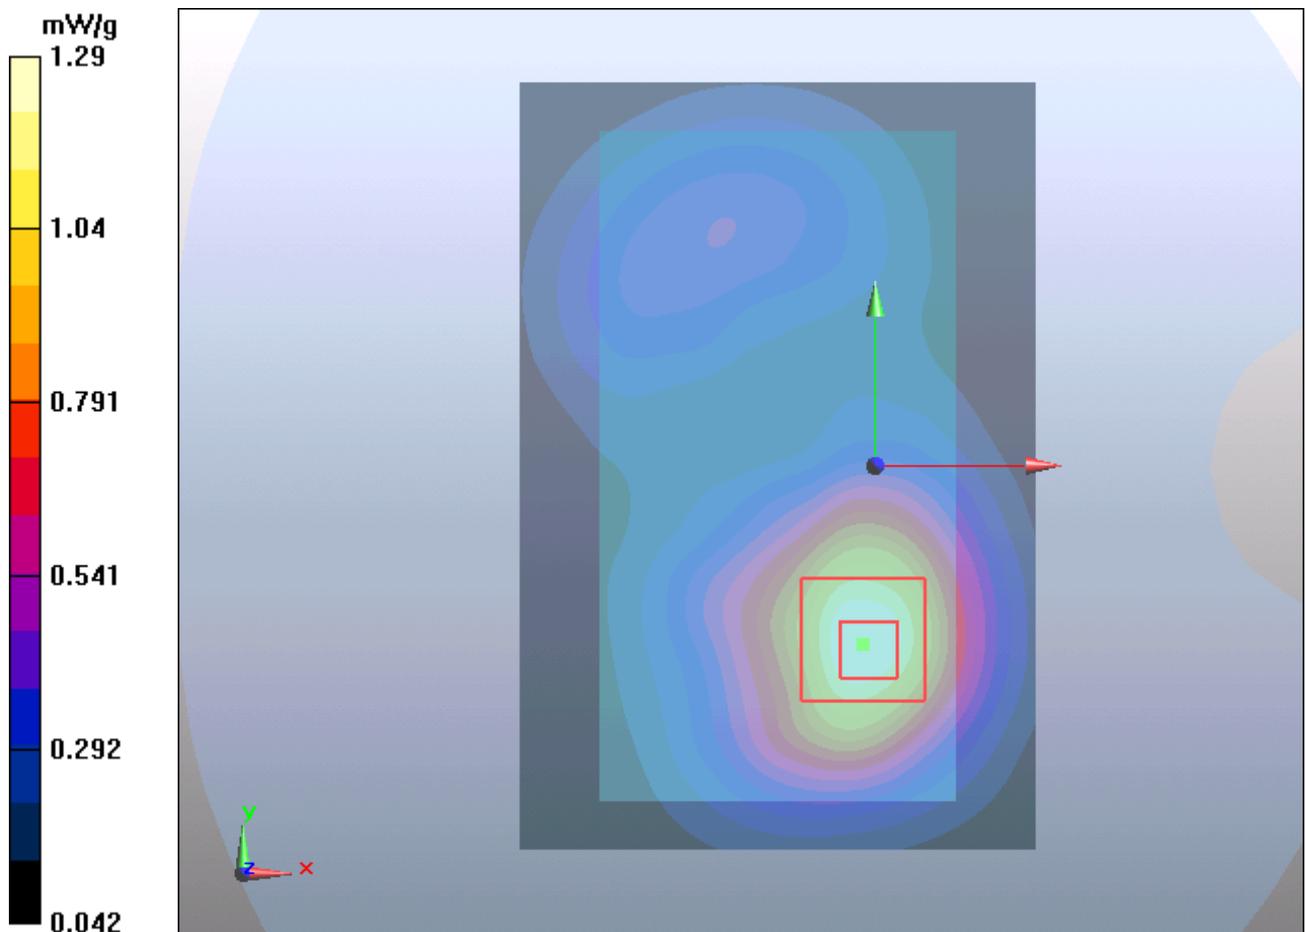


Figure 72 Body, Back Side, WCDMA Band II Channel 9400

WCDMA Band II Back Side Low

Date/Time: 6/9/2012 7:34:02 PM

Communication System: WCDMA ; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.19 mW/g

Back Side Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.7 V/m; Power Drift = -0.093 dB

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.628 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

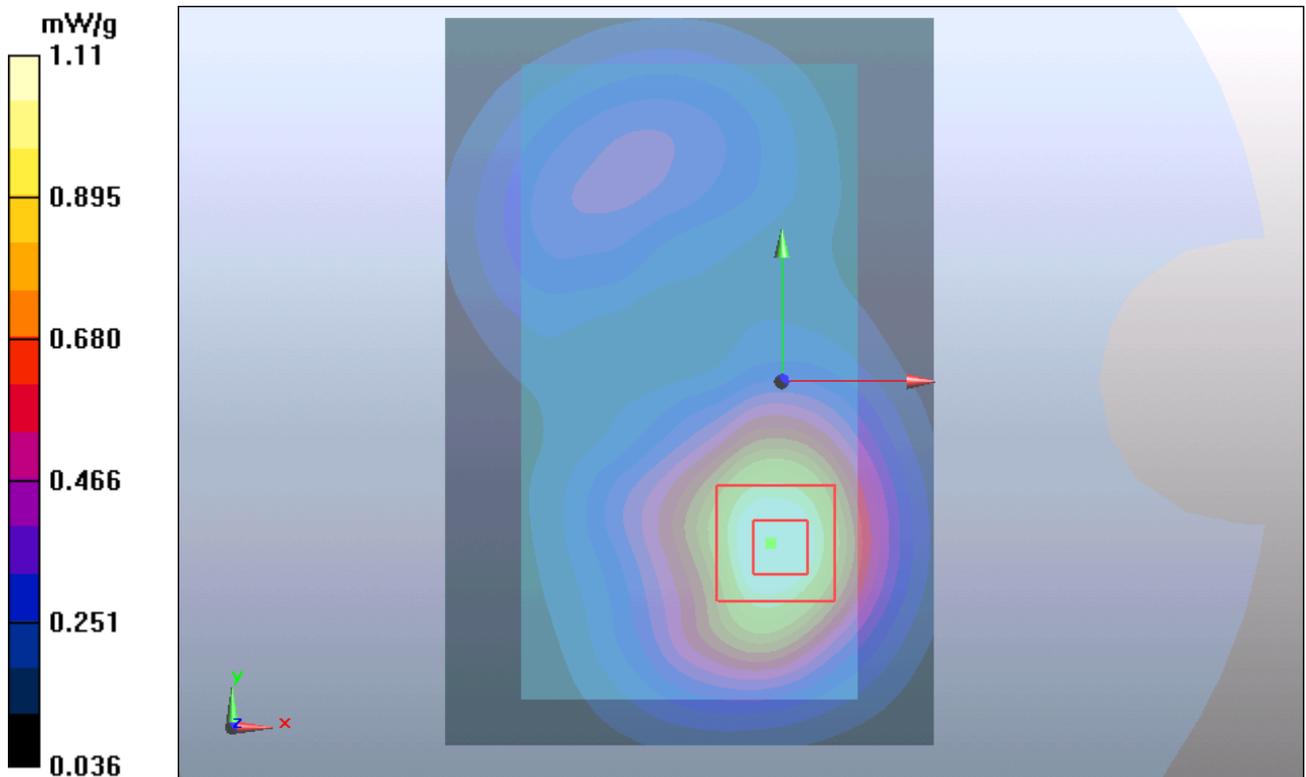


Figure 73 Body, Back Side, WCDMA Band II Channel 9262

WCDMA Band II Front Side High

Date/Time: 6/9/2012 8:41:08 PM

Communication System: WCDMA ; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Front Side High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.13 mW/g

Front Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.593 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

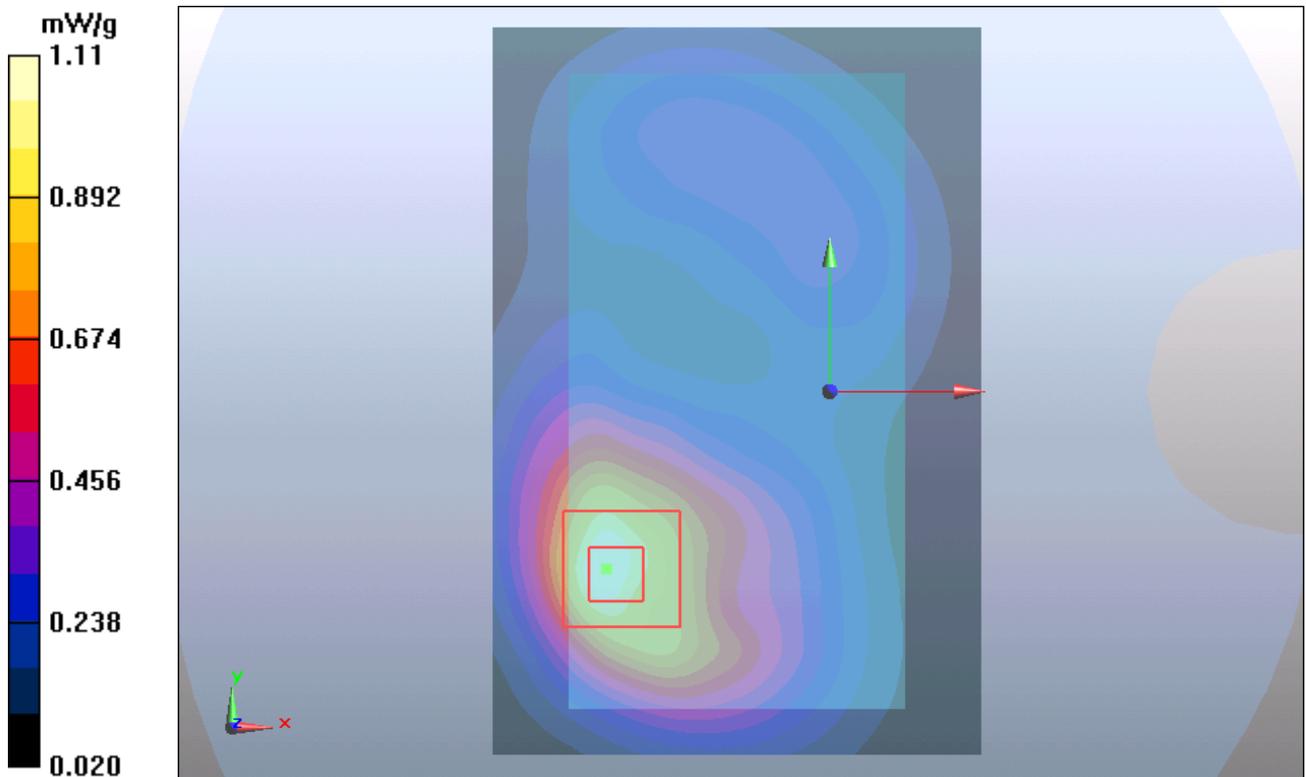


Figure 74 Body, Front Side, WCDMA Band II Channel 9538

WCDMA Band II Front Side Middle

Date/Time: 6/9/2012 8:25:23 PM

Communication System: WCDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Front Side Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.18 mW/g

Front Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = -0.056 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.614 mW/g

Maximum value of SAR (measured) = 1.16 mW/g

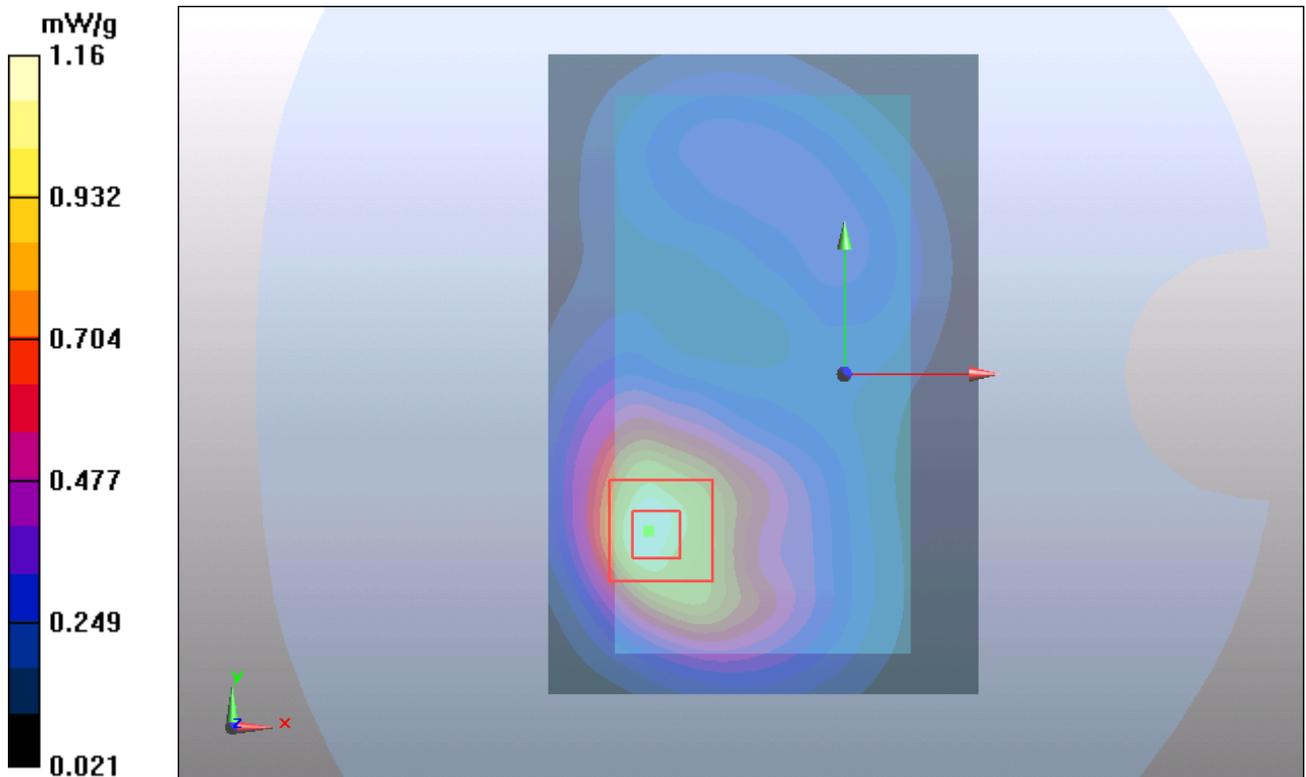


Figure 75 Body, Front Side, WCDMA Band II Channel 9400

WCDMA Band II Front Side Low

Date/Time: 6/9/2012 8:56:58 PM

Communication System: WCDMA ; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Front Side Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.04 mW/g

Front Side Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = 0.090 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.954 mW/g; SAR(10 g) = 0.546 mW/g

Maximum value of SAR (measured) = 1.03 mW/g

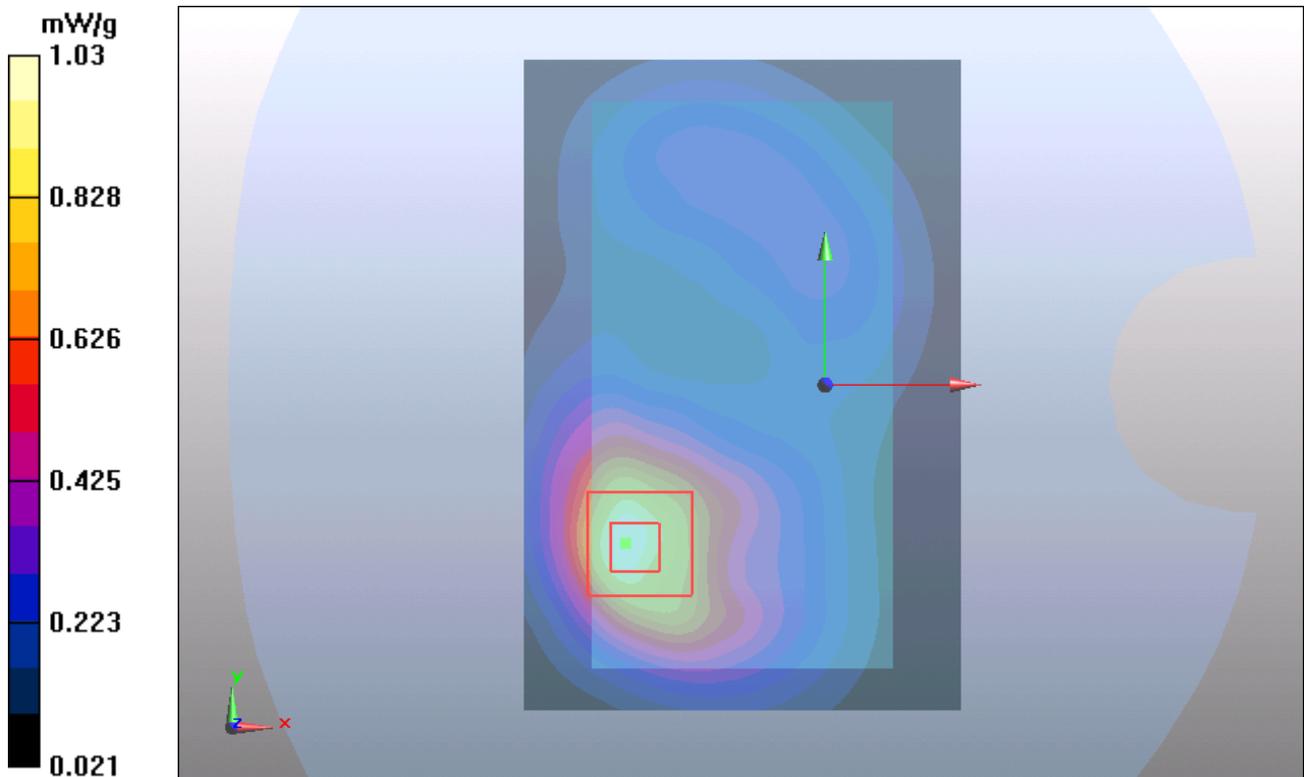


Figure 76 Body, Front Side, WCDMA Band II Channel 9262

WCDMA Band II Left Edge Middle

Date/Time: 6/9/2012 10:05:12 PM

Communication System: WCDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Left Edge Middle/Area Scan (31x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.376 mW/g

Left Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = 0.099 dB

Peak SAR (extrapolated) = 0.574 W/kg

SAR(1 g) = 0.344 mW/g; SAR(10 g) = 0.199 mW/g

Maximum value of SAR (measured) = 0.375 mW/g

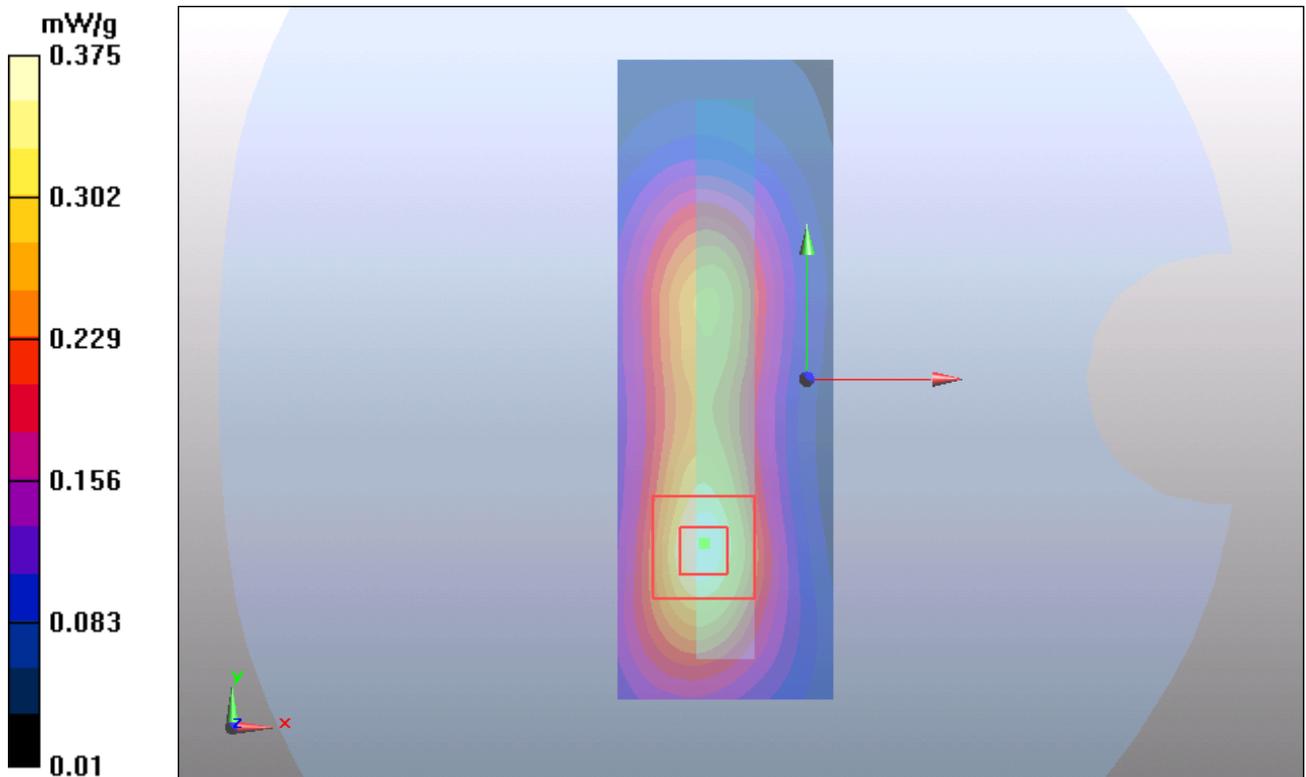


Figure 77 Body, Left Edge, WCDMA Band II Channel 9400

WCDMA Band II Right Edge Middle

Date/Time: 6/9/2012 10:18:59 PM

Communication System: WCDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Right Edge Middle/Area Scan (31x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.189 mW/g

Right Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.52 V/m; Power Drift = 0.088 dB

Peak SAR (extrapolated) = 0.277 W/kg

SAR(1 g) = 0.169 mW/g; SAR(10 g) = 0.097 mW/g

Maximum value of SAR (measured) = 0.187 mW/g

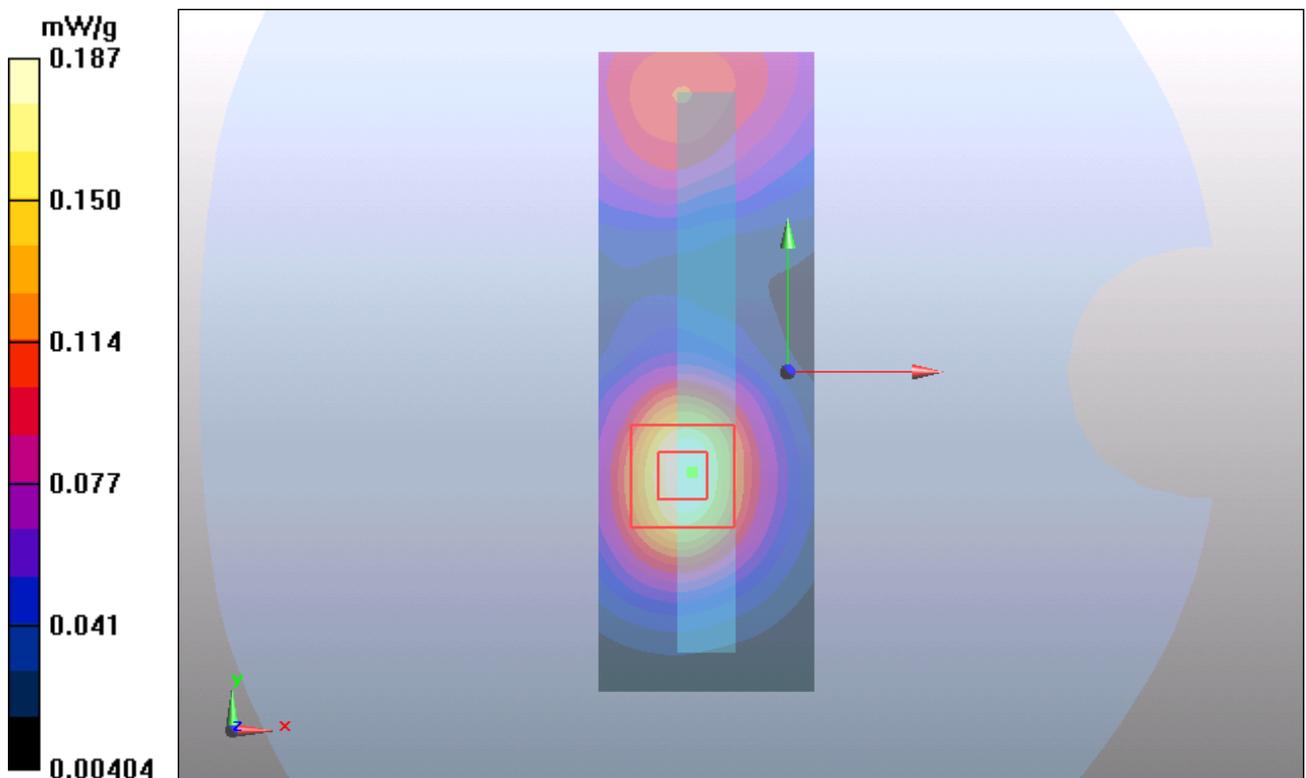


Figure 78 Body, Right Edge, WCDMA Band II Channel 9400

WCDMA Band II Bottom Edge Middle

Date/Time: 6/9/2012 10:38:50 PM

Communication System: WCDMA ; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Bottom Edge Middle/Area Scan (31x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.628 mW/g

Bottom Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.8 V/m; Power Drift = 0.102 dB

Peak SAR (extrapolated) = 0.952 W/kg

SAR(1 g) = 0.577 mW/g; SAR(10 g) = 0.333 mW/g

Maximum value of SAR (measured) = 0.634 mW/g

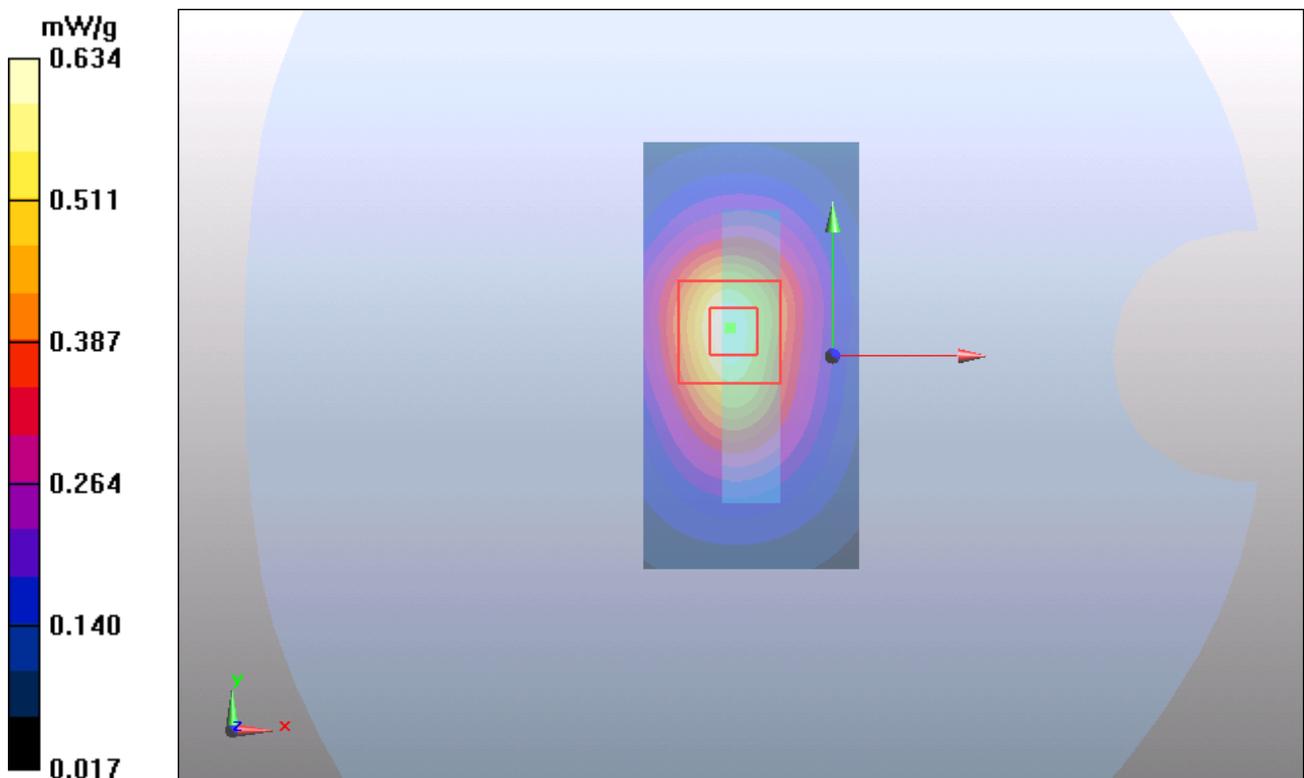


Figure 79 Body, Bottom Edge, WCDMA Band II Channel 9400

WCDMA Band II with Earphone Back Side Middle

Date/Time: 6/9/2012 8:08:03 PM

Communication System: WCDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.36 mW/g

Back Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.6 V/m; Power Drift = 0.008 dB

Peak SAR (extrapolated) = 2 W/kg

SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.736 mW/g

Maximum value of SAR (measured) = 1.31 mW/g

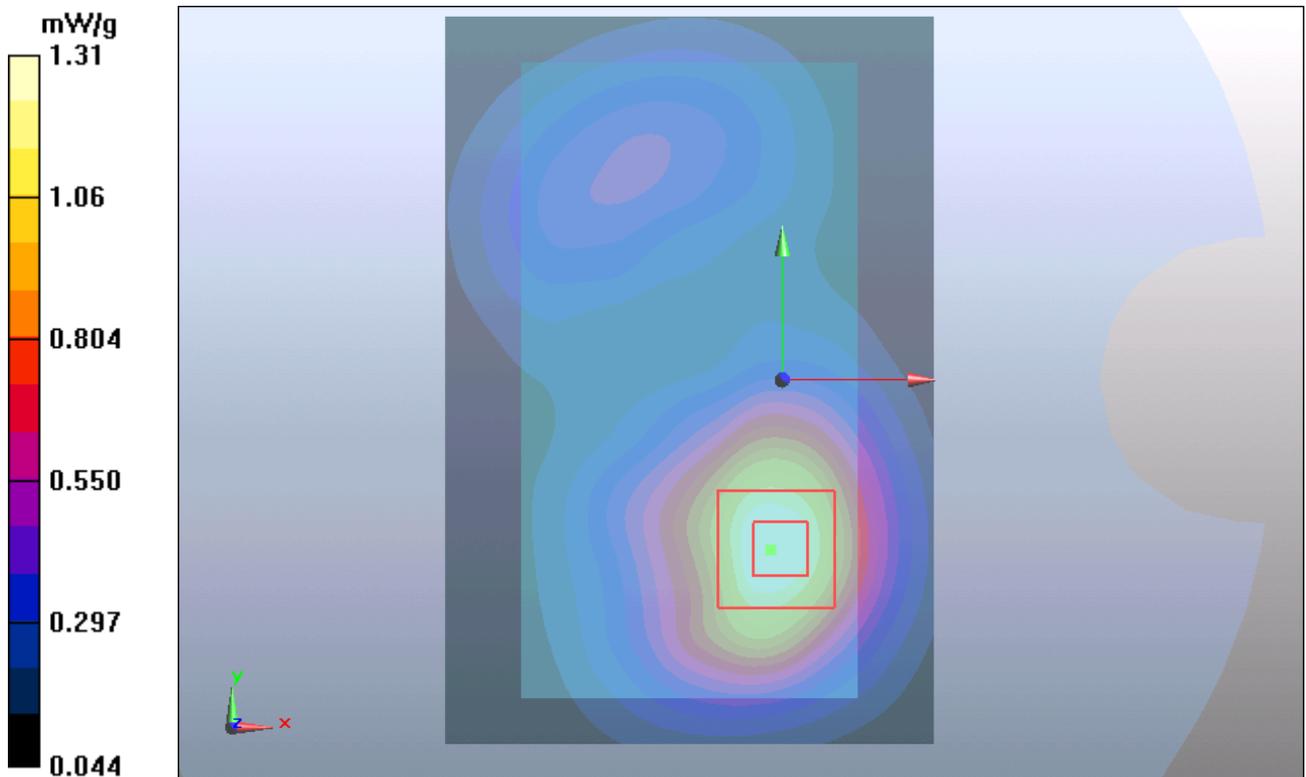


Figure 80 Body with Earphone, Back Side, WCDMA Band II Channel 9400

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1203-0414SAR01R2

Page 140 of 250

WCDMA Band II HSDPA Back Side Middle

Date/Time: 6/9/2012 9:18:41 PM

Communication System: WCDMA ; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.46 mW/g


Back Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = -0.169 dB

Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 1.28 mW/g; SAR(10 g) = 0.765 mW/g

Maximum value of SAR (measured) = 1.37 mW/g

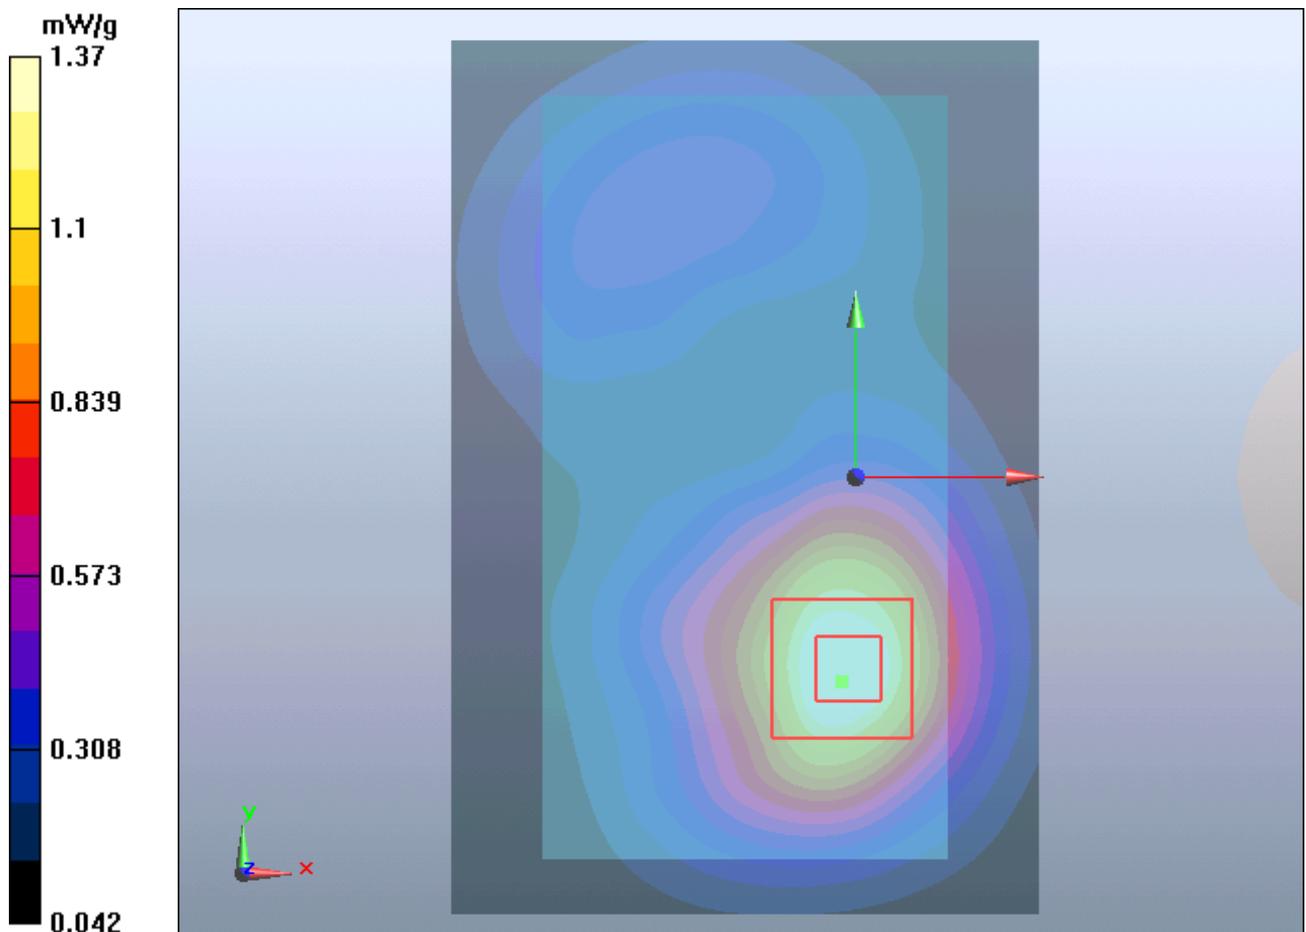

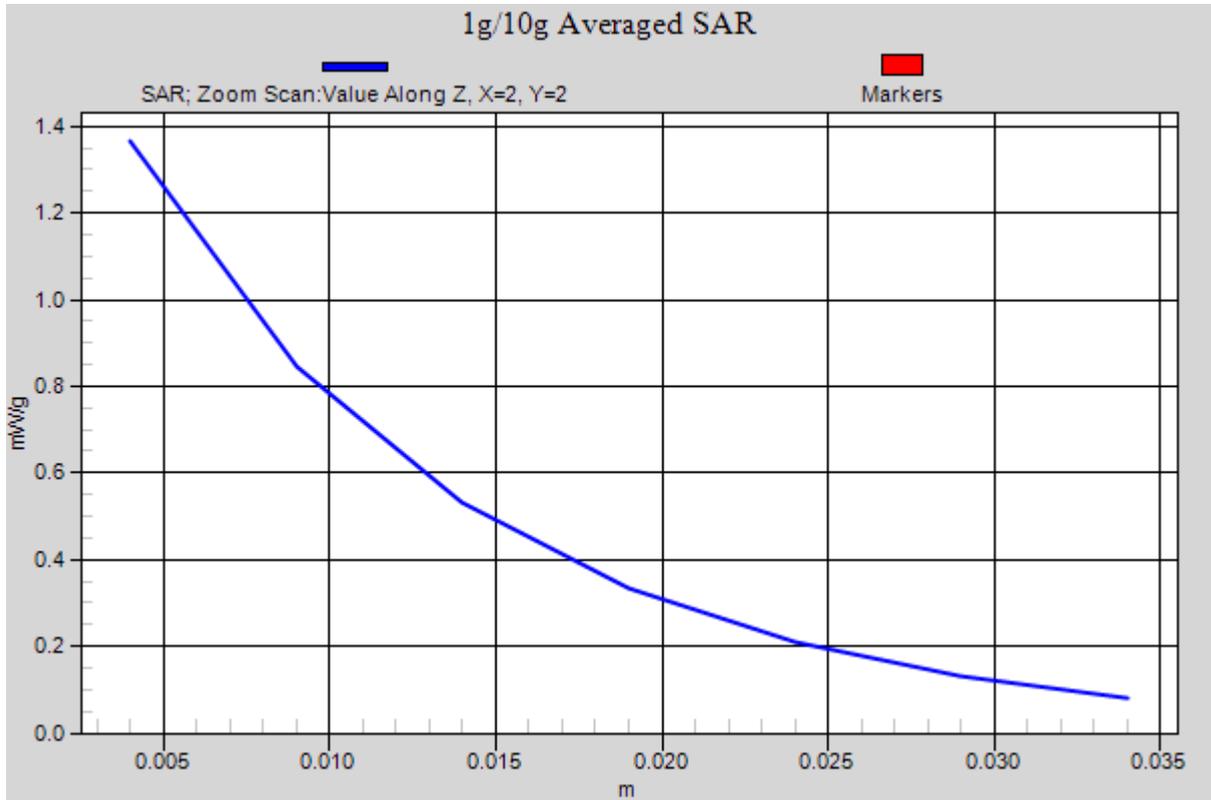


Figure 81 Body, Back Side, WCDMA Band II HSDPA Channel 9400

WCDMA Band II HSUPA Back Side Middle

Date/Time: 6/9/2012 9:43:05 PM

Communication System: WCDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.51, 7.51, 7.51); Calibrated: 10/3/2011

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.14 mW/g

Back Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.6 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.608 mW/g

Maximum value of SAR (measured) = 1.09 mW/g

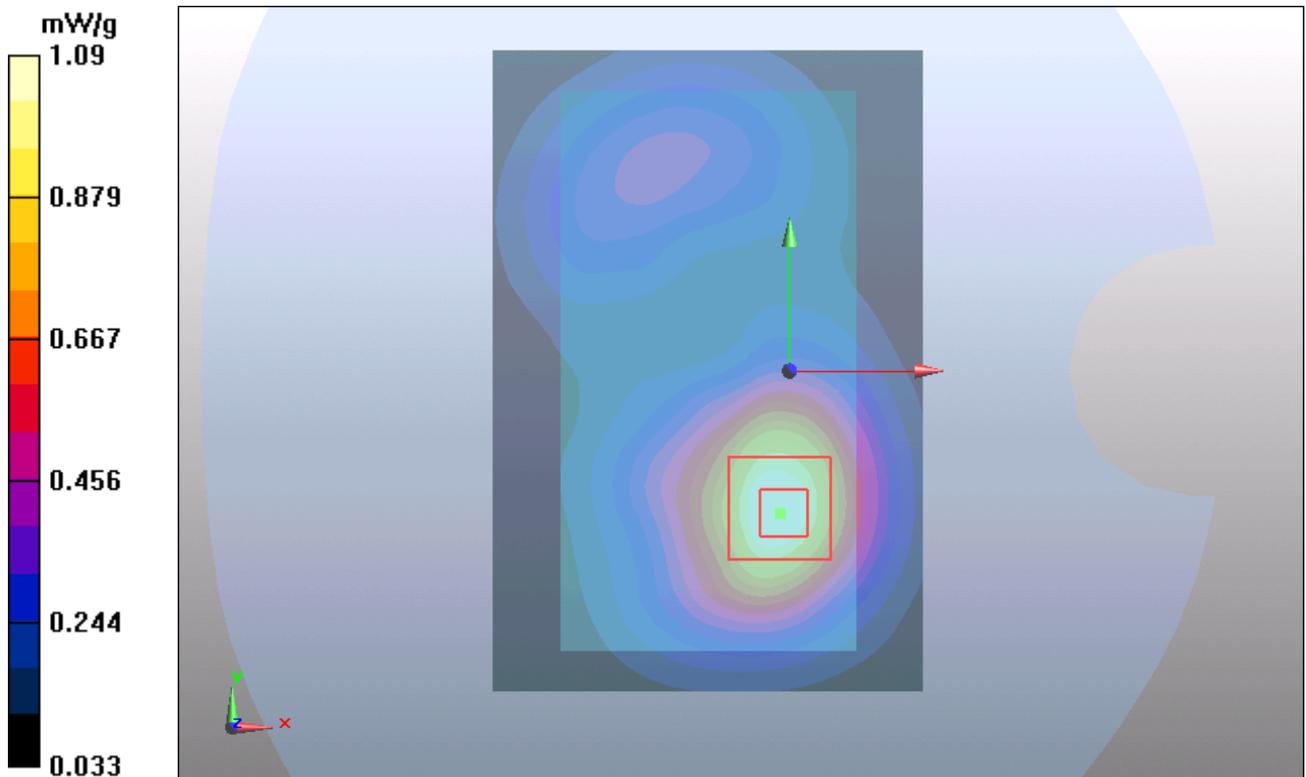


Figure 82 Body, Back Side, WCDMA Band II HSUPA Channel 9400

WCDMA Band IV Left Cheek High

Date/Time: 4/10/2012 4:36:20 PM

Communication System: WCDMA ; Frequency: 1752.6 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(8.23, 8.23, 8.23) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Cheek High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.23 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.16 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.643 mW/g

Maximum value of SAR (measured) = 1.25 mW/g

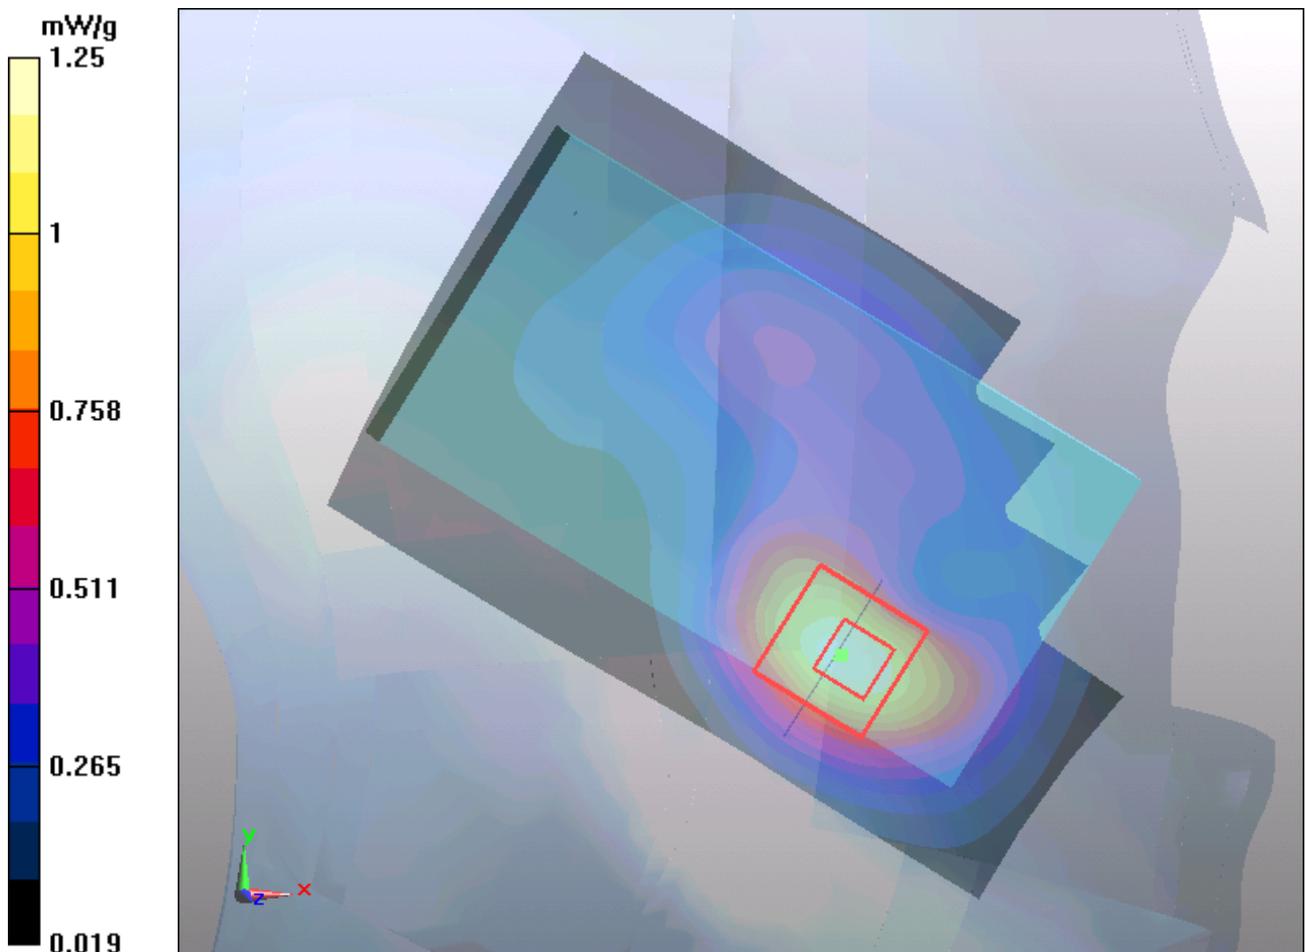


Figure 83 Left Hand Touch Cheek WCDMA Band IV Channel 1513

WCDMA Band IV Left Cheek Middle

Date/Time: 4/10/2012 4:19:51 PM

Communication System: WCDMA ; Frequency: 1732.6 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.33$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(8.23, 8.23, 8.23) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Cheek Middle /Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.54 mW/g


Cheek Middle /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.69 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 2.28 W/kg

SAR(1 g) = 1.38 mW/g; SAR(10 g) = 0.785 mW/g

Maximum value of SAR (measured) = 1.51 mW/g

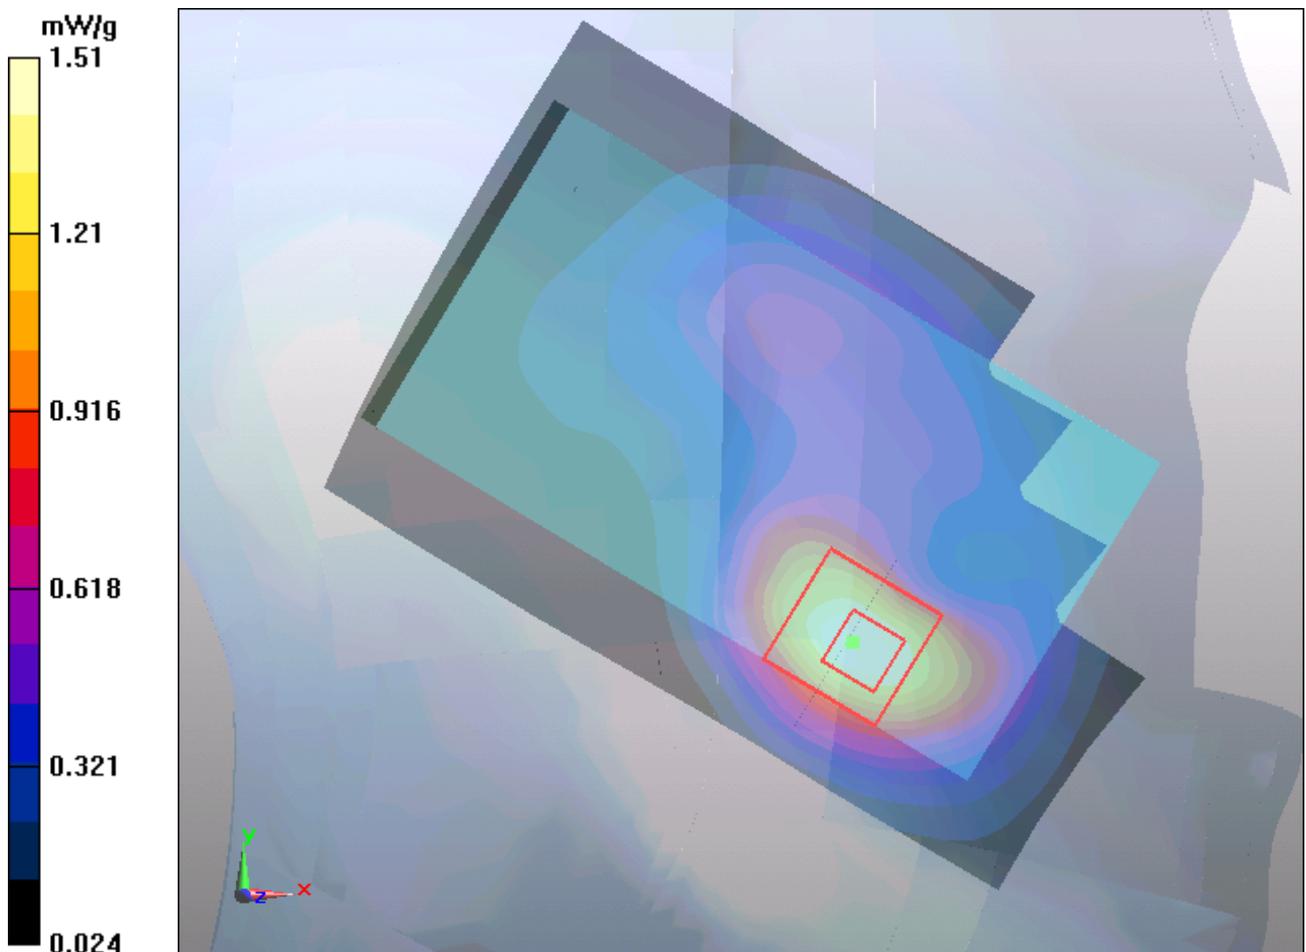

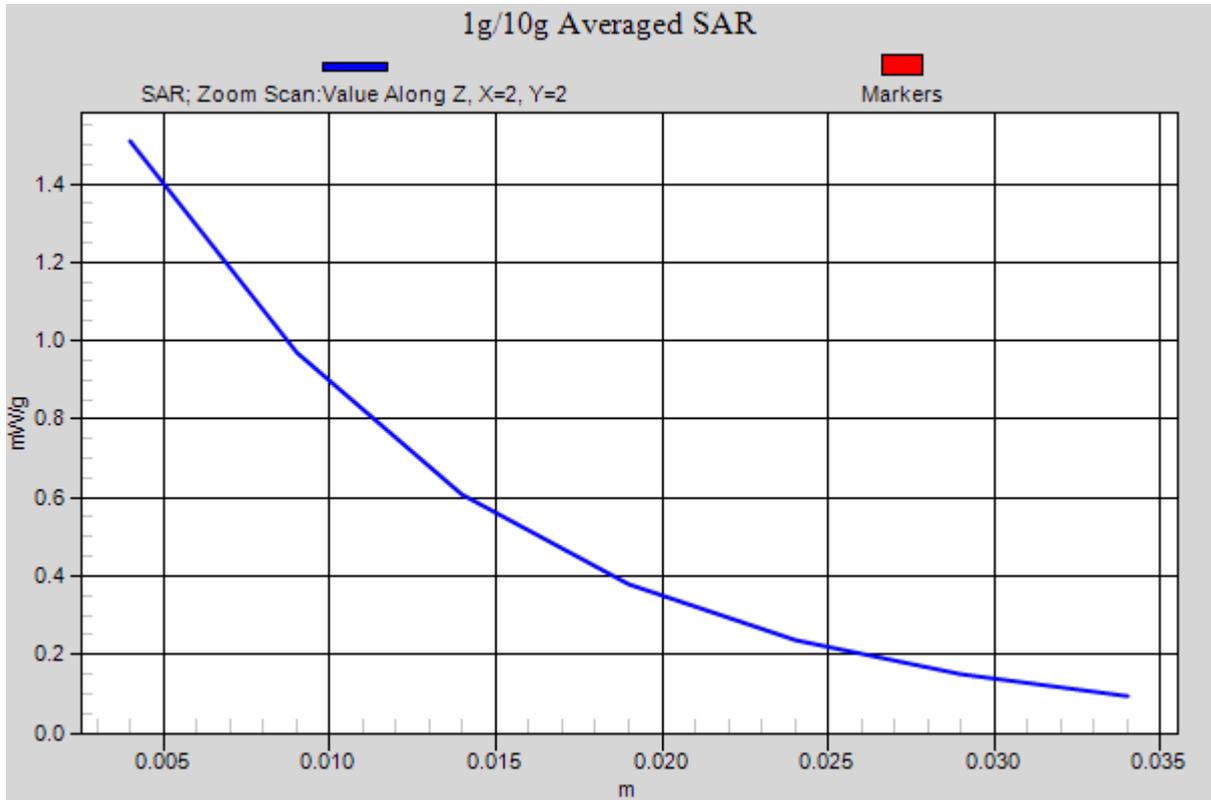


Figure 84 Left Hand Touch Cheek WCDMA Band IV Channel 1413

WCDMA Band IV Left Cheek Low

Date/Time: 4/10/2012 4:52:35 PM

Communication System: WCDMA ; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.31$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(8.23, 8.23, 8.23) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Cheek Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.33 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.2 V/m; Power Drift = 0.141 dB

Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 1.21 mW/g; SAR(10 g) = 0.689 mW/g

Maximum value of SAR (measured) = 1.32 mW/g

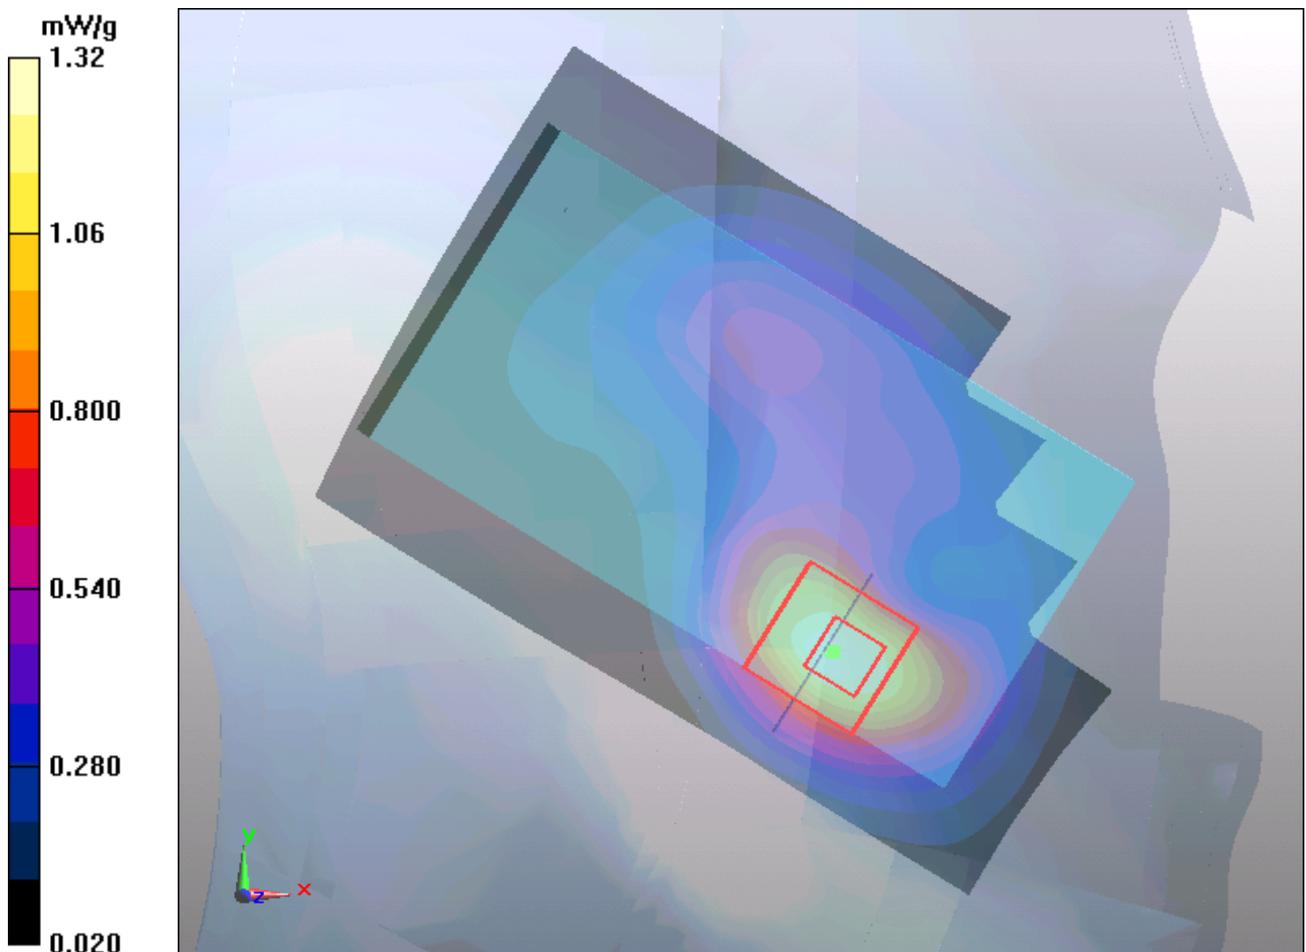


Figure 85 Left Hand Touch Cheek WCDMA Band IV Channel 1312

WCDMA Band IV Left Tilt Middle

Date/Time: 4/10/2012 11:19:54 AM

Communication System: WCDMA ; Frequency: 1732.6 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.33$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(8.23, 8.23, 8.23) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.420 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = 0.175 dB

Peak SAR (extrapolated) = 0.563 W/kg

SAR(1 g) = 0.395 mW/g; SAR(10 g) = 0.256 mW/g

Maximum value of SAR (measured) = 0.418 mW/g

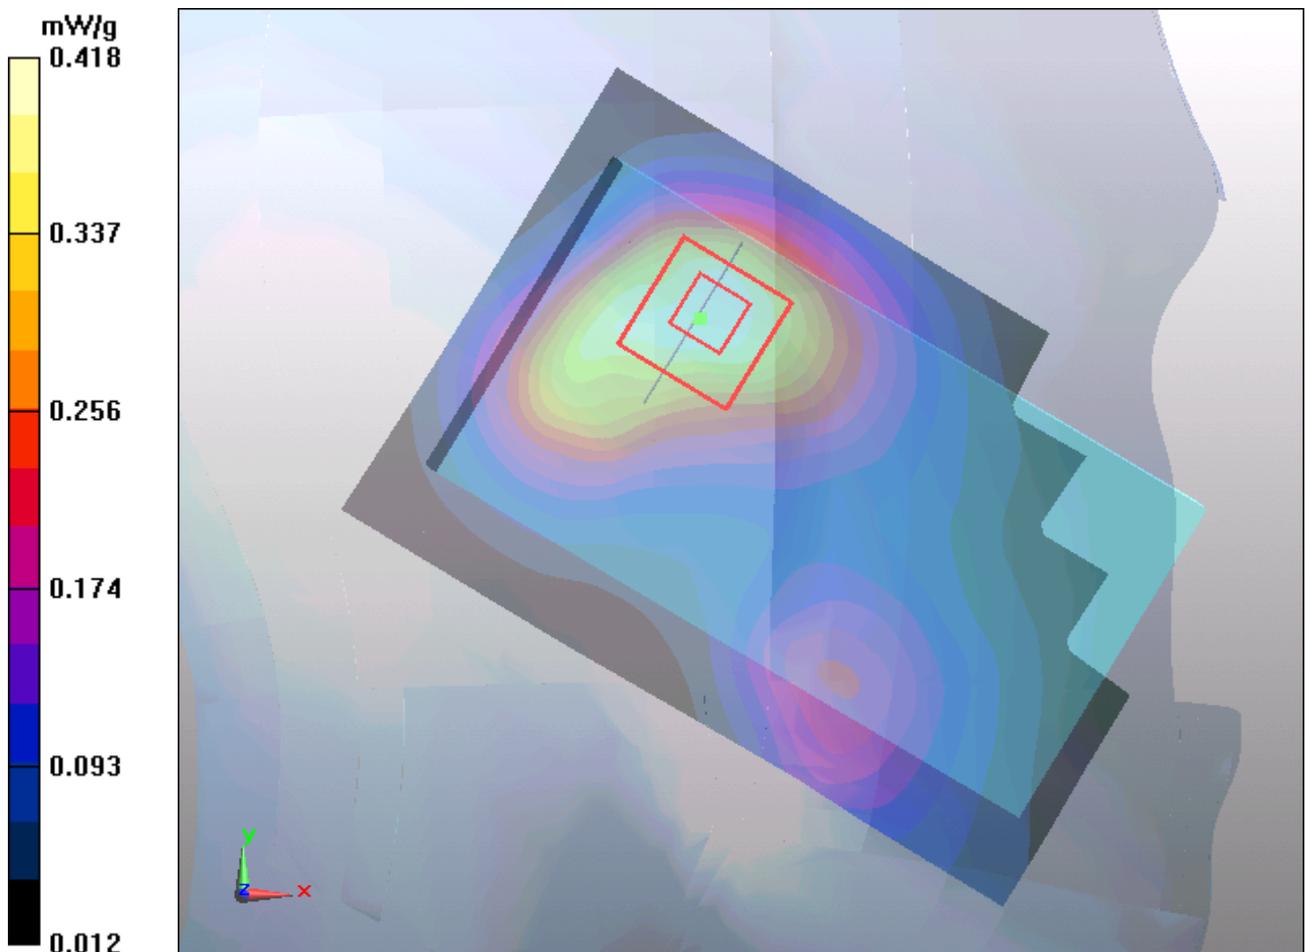


Figure 86 Left Hand Tilt 15°WCDMA Band IV Channel 1413

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1203-0414SAR01R2

Page 148 of 250

WCDMA Band IV Right Cheek Middle

Date/Time: 4/10/2012 10:35:23 AM

Communication System: WCDMA ; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.33$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(8.23, 8.23, 8.23) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.851 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.7 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.705 mW/g; SAR(10 g) = 0.453 mW/g

Maximum value of SAR (measured) = 0.760 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.7 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 1.1 W/kg

SAR(1 g) = 0.798 mW/g; SAR(10 g) = 0.517 mW/g

Maximum value of SAR (measured) = 0.854 mW/g

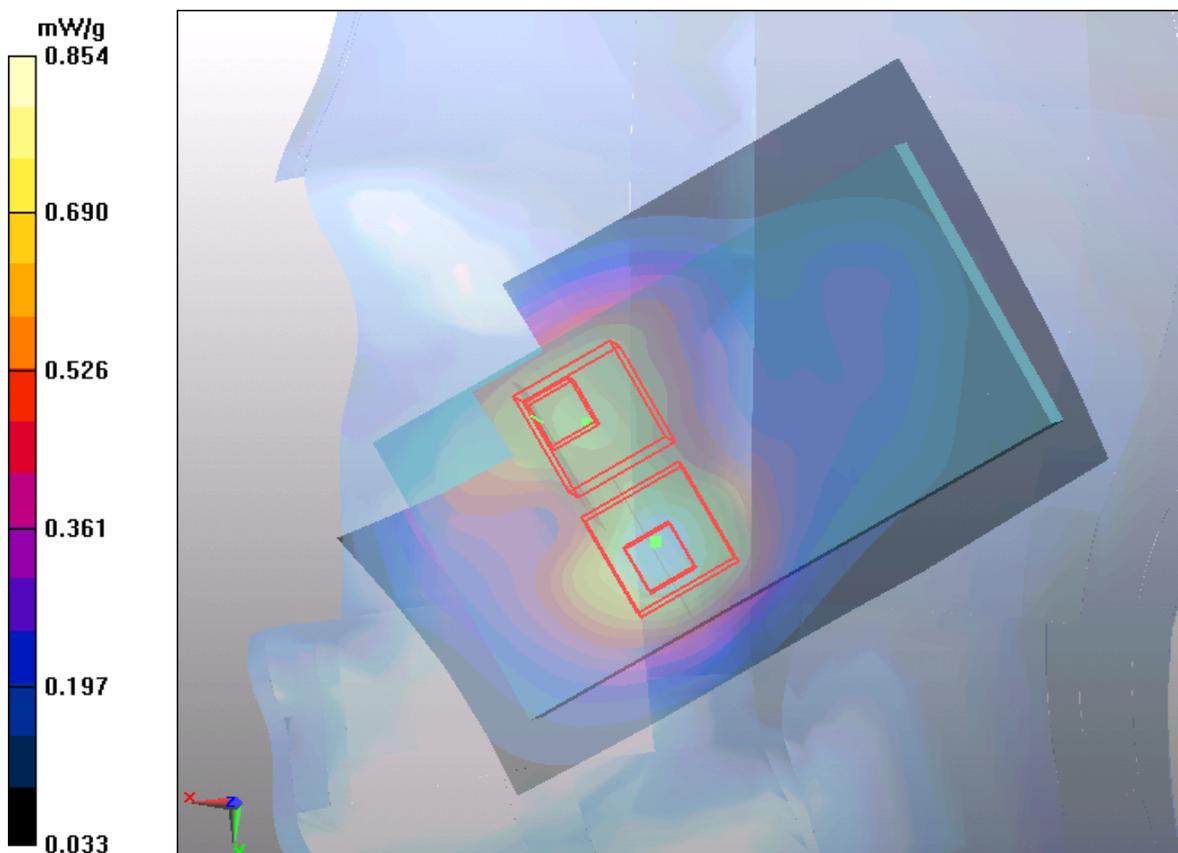


Figure 87 Right Hand Touch Cheek WCDMA Band IV Channel 1413

WCDMA Band IV Right Tilt Middle

Date/Time: 4/10/2012 10:59:37 AM

Communication System: WCDMA ; Frequency: 1732.6 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.33$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(8.23, 8.23, 8.23) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.440 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.2 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.618 W/kg

SAR(1 g) = 0.398 mW/g; SAR(10 g) = 0.243 mW/g

Maximum value of SAR (measured) = 0.440 mW/g

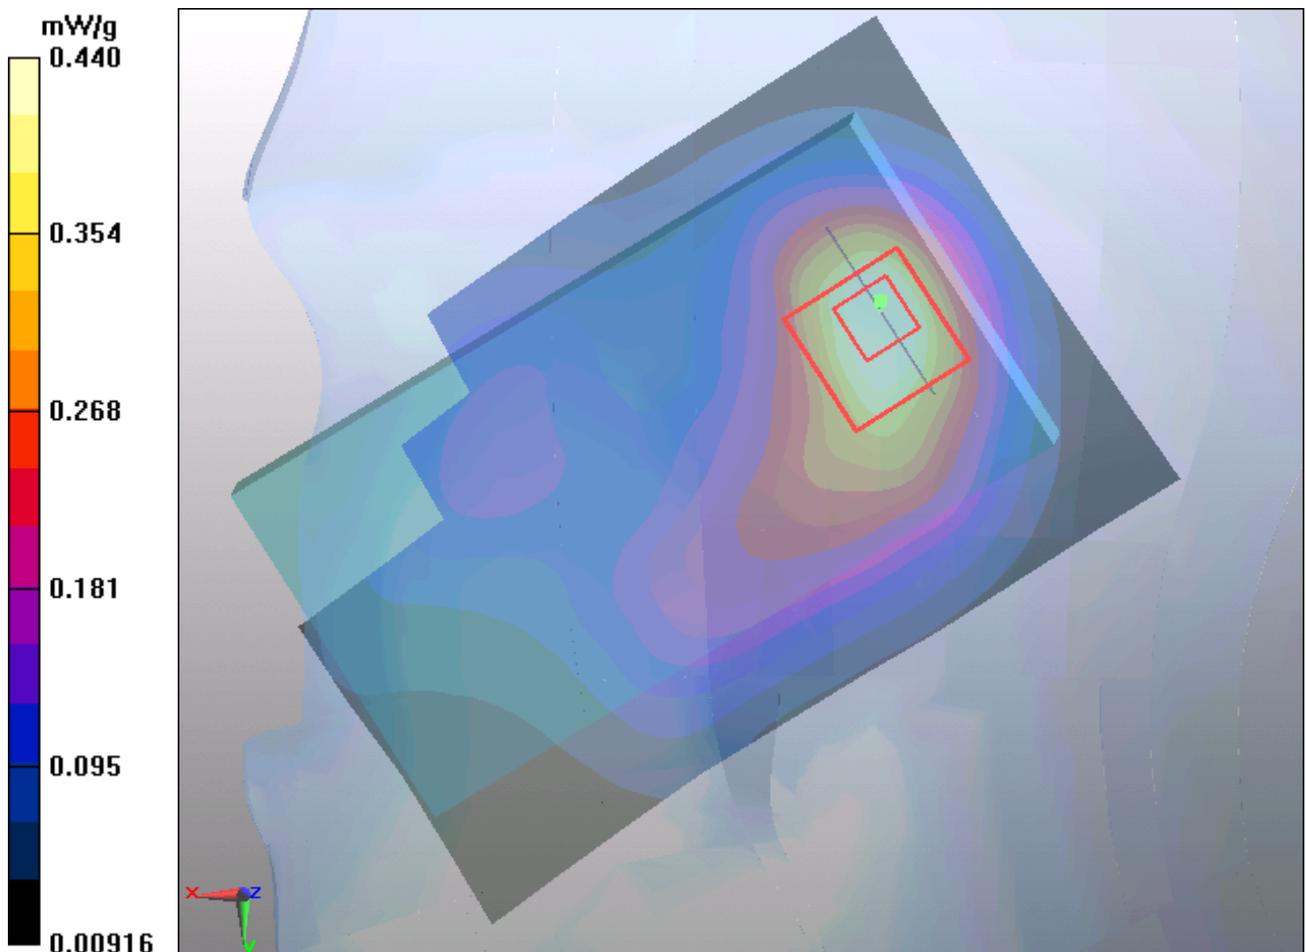


Figure 88 Right Hand Tilt 15°WCDMA Band IV Channel 1413

WCDMA Band IV Back Side High

Date/Time: 4/11/2012 12:16:38 PM

Communication System: WCDMA ; Frequency: 1752.6 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3816; ConvF(7.80, 7.80, 7.80) Calibrated: 10/3/2011;

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Back Side High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.05 mW/g

Back Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.3 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 1.5 W/kg

SAR(1 g) = 0.939 mW/g; SAR(10 g) = 0.563 mW/g

Maximum value of SAR (measured) = 1.02 mW/g

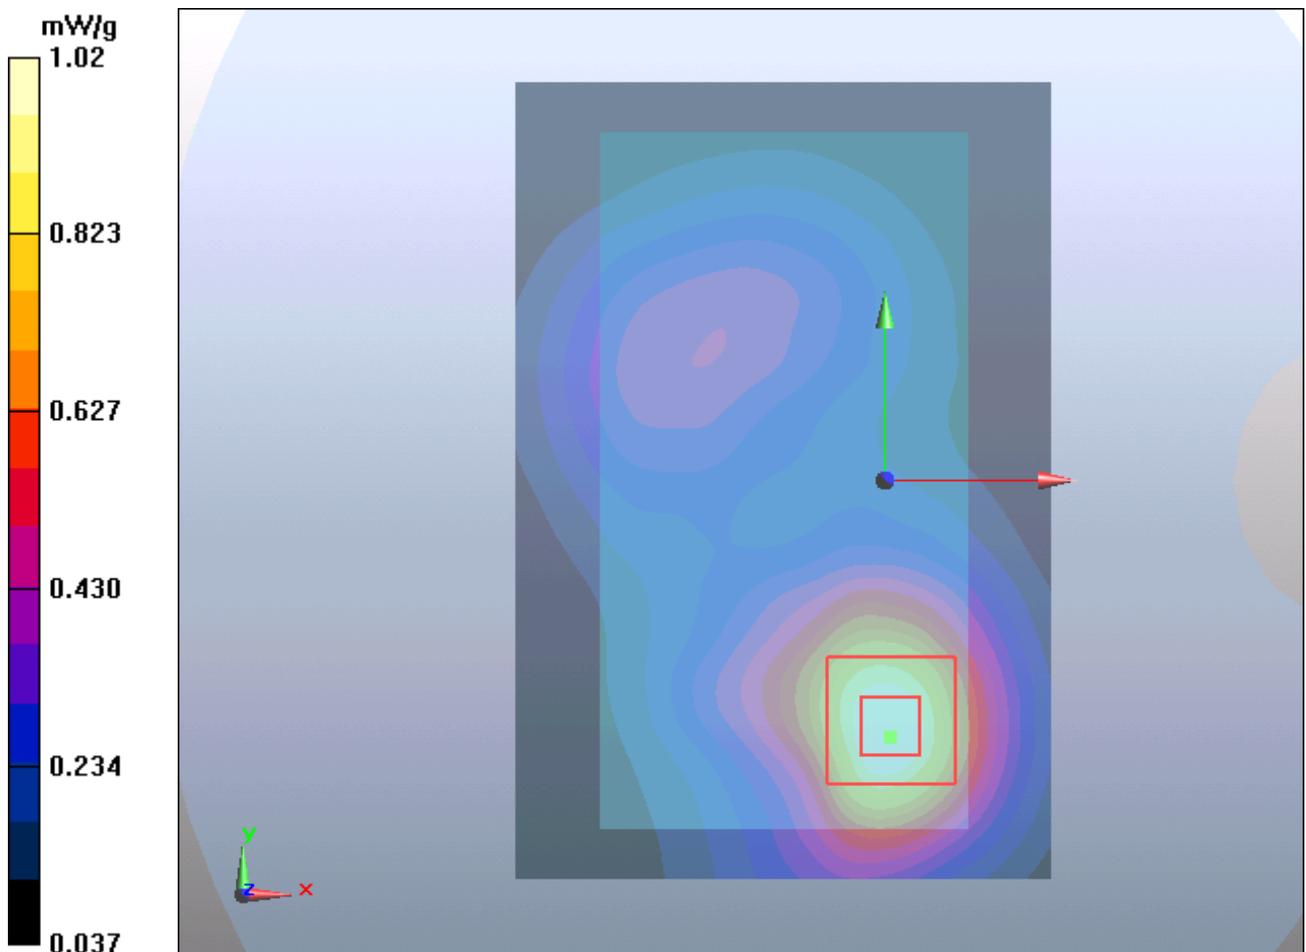


Figure 89 Body, Back Side, WCDMA Band IV Channel 1513