

FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : WCDMA/GSM (GPRS) Dual-Mode
Digital Mobile Phone
BRAND NAME : ZTE
MODEL NAME : ZTE V960
FCC ID : Q78-ZTEV960
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : Digital Transmission System (DTS)

The product was received on Jul. 04, 2011 and completely tested on Jul. 13, 2011. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Feature of Equipment Under Test 5

 1.4 Testing Site 6

 1.5 Applied Standards 6

 1.6 Ancillary Equipment List 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 7

 2.1 RF Power 8

 2.2 Test Mode 9

 2.3 Connection Diagram of Test System 10

 2.4 RF Utility 11

3 TEST RESULT 12

 3.1 6dB and 99% Bandwidth Measurement 12

 3.2 Output Power Measurement 19

 3.3 Band Edges Measurement 21

 3.4 Spurious Emission Measurement 29

 3.5 Power Spectral Density Measurement 39

 3.6 AC Conducted Emission Measurement 46

 3.7 Radiated Emission Measurement 50

 3.8 Antenna Requirements 71

4 LIST OF MEASURING EQUIPMENT 72

5 UNCERTAINTY OF EVALUATION 73

APPENDIX A. PHOTOGRAPHS OF EUT

APPENDIX B. SETUP PHOTOGRAPHS

**SUMMARY OF TEST RESULT**

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	A8.4	Power Output	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(d)	A8.5	Frequency Band Edges	$\leq 20\text{dBc}$	Pass	-
3.4	15.247(d)	A8.5	Spurious Emission	$< 20\text{ dBc}$	Pass	-
3.5	15.247(e)	A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}$	Pass	-
3.6	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 7.63 dB at 1.70 MHz
3.7	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.14 dB at 7318 MHz
3.8	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	WCDMA/GSM(GPRS)Dual-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	ZTE V960
FCC ID	Q78-ZTEV960
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	11
Carrier Frequency of Each Channel	2412+(n-1)*5 MHz; n=1~11
Channel Spacing	5 MHz
Maximum Output Power to Antenna	802.11b : 19.94 dBm (0.099 W) 802.11g : 19.86 dBm (0.097 W) 802.11n (BW 20MHz) : 19.76 dBm (0.095 W)
Antenna Type	PIFA Antenna with gain -1.80 dBi
HW Version	p5qB
SW Version	GB_VIVO_P743V1.0.0B01
Type of Modulation	802.11b : DSSS (BPSK / QPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)
EUT Stage	Identical Prototype

Remark:

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Transmission System (DTS).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH01-KS	03CH01-KS	722060/4086B-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 (Measurement Guidelines of DTS)
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 8

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (Certification), recorded in a separate test report.



1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded, 1.8 m
3.	Router	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
4.	Bluetooth Base Station	R&S	CBT	FCC DoC	N/A	Unshielded, 1.8 m
5.	Bluetooth Earphone	CELLINK	BTHS-6025-F	PQY-4710874200357	N/A	N/A
6.	Signal Generator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

2 Test Configuration of Equipment Under Test

2.1 RF Power

Preliminary tests were performed in different data rate and recorded the RF power output in the following table:

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	19.02	19.11	18.94	19.28
CH 06	2437 MHz	19.59	19.89	19.81	19.94
CH 11	2462 MHz	19.54	19.63	19.44	19.76

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412 MHz	19.01	18.79	18.45	17.96	17.68	17.42	17.51	17.45
CH 06	2437 MHz	19.59	19.35	19.14	18.49	18.05	17.68	17.77	17.35
CH 11	2462 MHz	19.86	19.41	18.86	18.51	18.18	17.74	17.86	17.64

Channel	Frequency	2.4GHz 802.11n (BW 20MHz) RF Power (dBm)							
		OFDM Data Rate							
		MCS=0	MCS=1	MCS=2	MCS=3	MCS=4	MCS=5	MCS=6	MCS=7
		6.5 Mbps	13 Mbps	19.5 Mbps	26 Mbps	39 Mbps	52 Mbps	58.5 Mbps	65 Mbps
CH 01	2412 MHz	19.45	18.18	17.84	17.53	17.43	17.76	17.33	17.23
CH 06	2437 MHz	19.76	18.76	18.35	18.16	17.96	18.25	17.54	17.48
CH 11	2462 MHz	19.24	18.25	17.86	17.58	17.38	17.58	17.24	17.1

Remark:

1. The data rates of WLAN 802.11b/g/n were set in 11Mbps for 802.11b, 6Mbps for 802.11g, and 6.5Mbps for 802.11n (BW 20MHz) for all the test cases due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.

2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz), radiated emission (30 MHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests, X, Y, Z in three orthogonal panels, were conducted to determine the final configuration from all possible combinations, laptop / tablet modes.

The following tables are showing the test modes as the worst cases and recorded in this report.


Test Cases		
Test Item	802.11b (Modulation : DSSS)	802.11g/n (Modulation : OFDM)
Conducted TCs	Mode 1 : 802.11b CH01_2412 MHz Mode 2 : 802.11b CH06_2437 MHz Mode 3 : 802.11b CH11_2462 MHz	Mode 4: 802.11g_CH01_2412 MHz Mode 5: 802.11g_CH06_2437 MHz Mode 6: 802.11g_CH11_2462 MHz Mode 7: 802.11n (BW 20M)_CH01_2412 MHz Mode 8: 802.11n (BW 20M)_CH06_2437 MHz Mode 9: 802.11n (BW 20M)_CH11_2462 MHz
Radiated TCs	Mode 1 : 802.11b CH01_2412 MHz Mode 2 : 802.11b CH06_2437 MHz Mode 3 : 802.11b CH11_2462 MHz	Mode 4: 802.11g_CH01_2412 MHz Mode 5: 802.11g_CH06_2437 MHz Mode 6: 802.11g_CH11_2462 MHz Mode 7: 802.11n (BW 20M)_CH01_2412 MHz Mode 8: 802.11n (BW 20M)_CH06_2437 MHz Mode 9: 802.11n (BW 20M)_CH11_2462 MHz
AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Idle + WIFI Idle + Adapter + Earphone + FM Rx + GPS Rx	
Remark: The worst case of conducted emission is mode 1; only the test data of it was reported.		

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

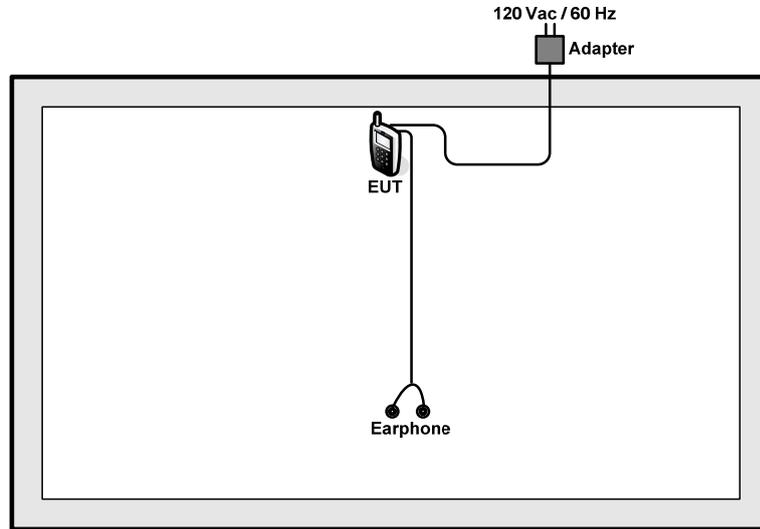

<AC Conducted Emission Mode>

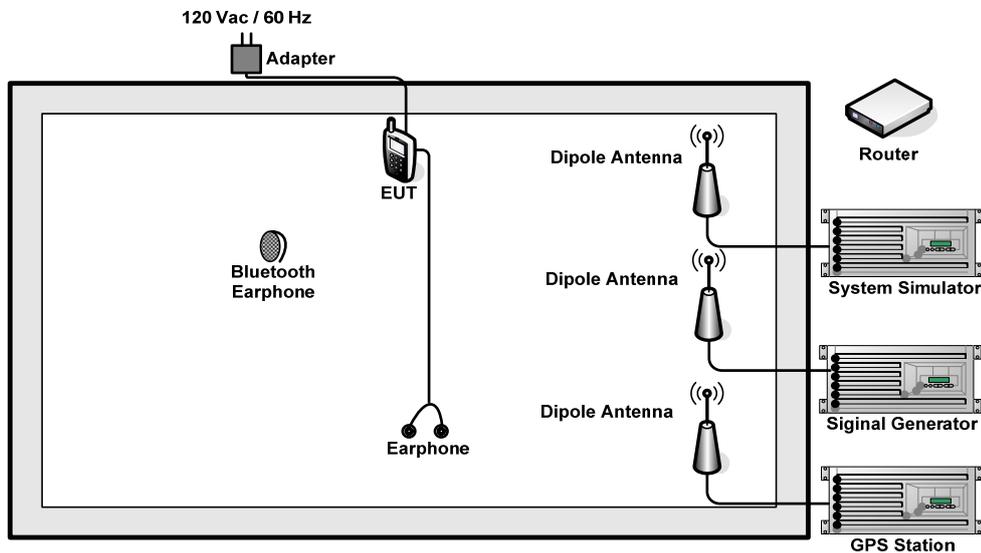



2.4 RF Utility

The programmed RF utility “mgui” is installed in EUT to provide channel selection, power level, data rate and the application type. RF Utility can send transmitting signal for all testing. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz.
In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.
4. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

3.1.4 Test Setup

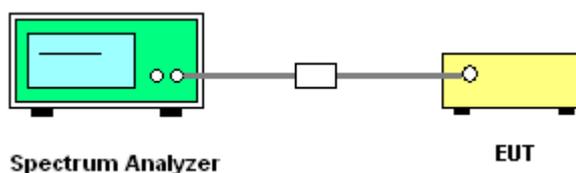




3.1.5 Test Result of 6dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	23~24°C
Test Engineer :	Jun Liu	Relative Humidity :	54~56%

Channel	Frequency (MHz)	802.11b 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	7.84	0.5	Pass
06	2437	7.44	0.5	Pass
11	2462	7.76	0.5	Pass


Mode 1 : 6 dB Bandwidth Plot on 802.11b Channel 01

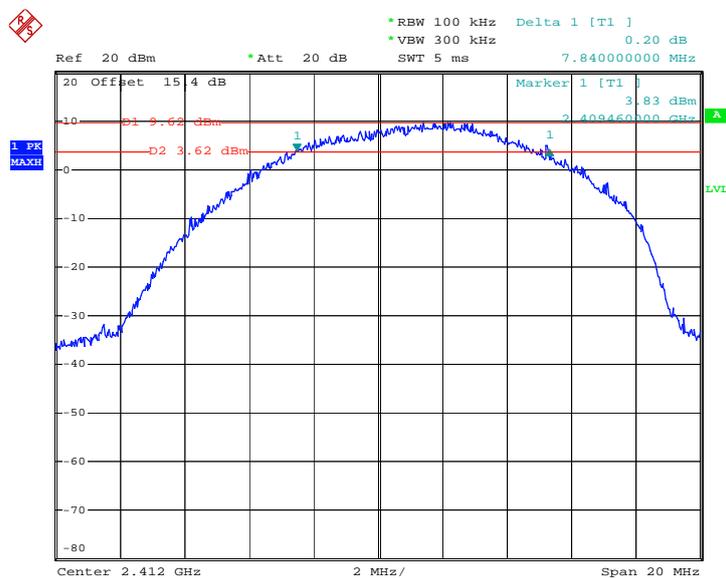

Date: 11.JUL.2011 13:57:54




Mode 2 : 6 dB Bandwidth Plot on 802.11b Channel 06

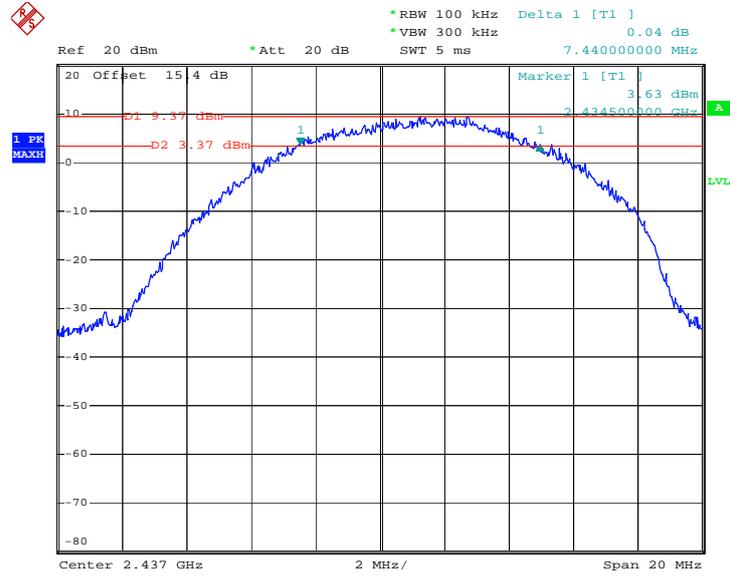

Date: 11.JUL.2011 14:12:00

Mode 3 : 6 dB Bandwidth Plot on 802.11b Channel 11

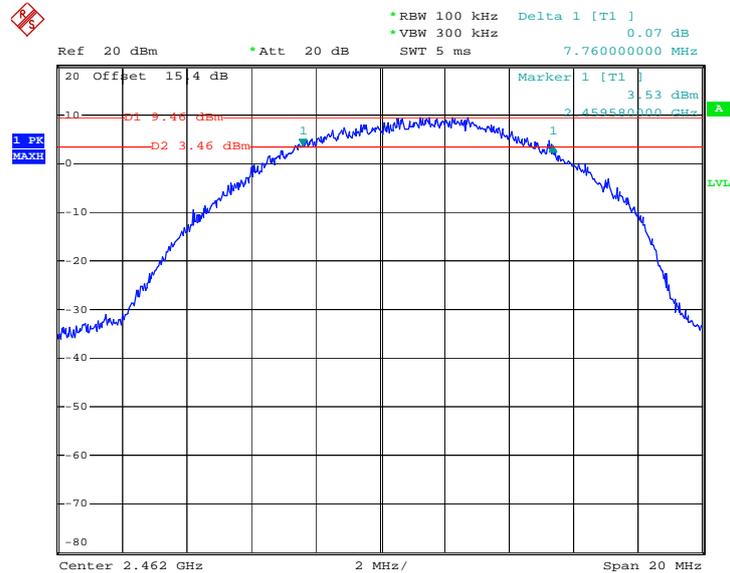


Date: 11.JUL.2011 14:49:56



Test Mode :	Mode 4, 5, 6	Temperature :	23~24°C
Test Engineer :	Jun Liu	Relative Humidity :	54~56%

Channel	Frequency (MHz)	802.11g 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	15.12	0.5	Pass
06	2437	15.12	0.5	Pass
11	2462	15.16	0.5	Pass


Mode 4 : 6 dB Bandwidth Plot on 802.11g Channel 01

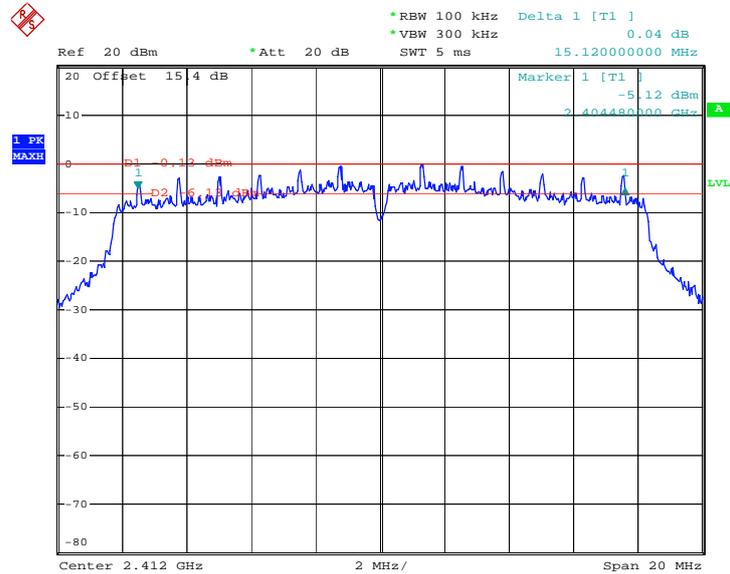

Date: 11.JUL.2011 14:53:11




Mode 5 : 6 dB Bandwidth Plot on 802.11g Channel 06

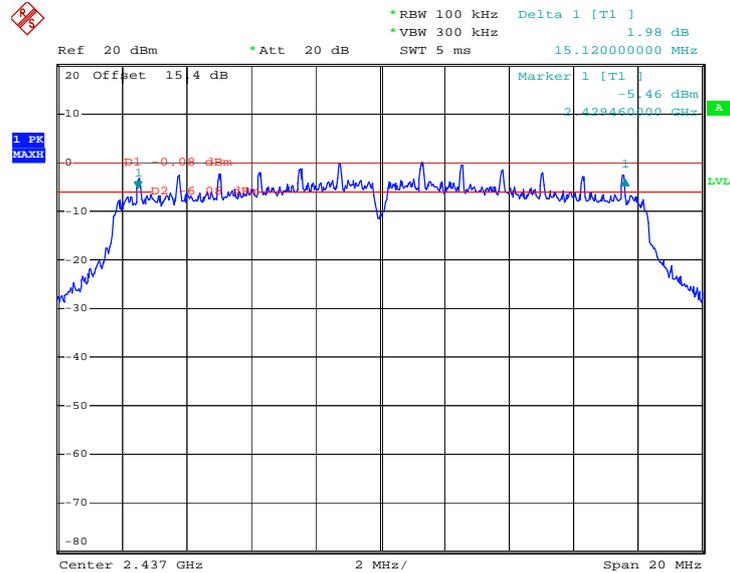

Date: 11.JUL.2011 15:10:49

Mode 6 : 6 dB Bandwidth Plot on 802.11g Channel 11

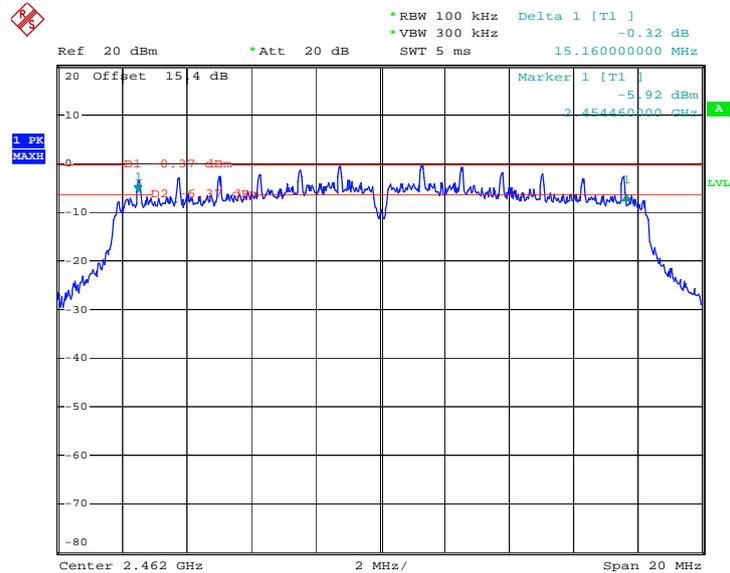


Date: 11.JUL.2011 15:25:04



Test Mode :	Mode 7, 8, 9	Temperature :	23~24°C
Test Engineer :	Jun Liu	Relative Humidity :	54~56%

Channel	Frequency (MHz)	802.11n (BW 20MHz) 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	15.08	0.5	Pass
06	2437	15.12	0.5	Pass
11	2462	15.16	0.5	Pass


Mode 7 : 6 dB Bandwidth Plot on 802.11n(BW 20MHz) Channel 01

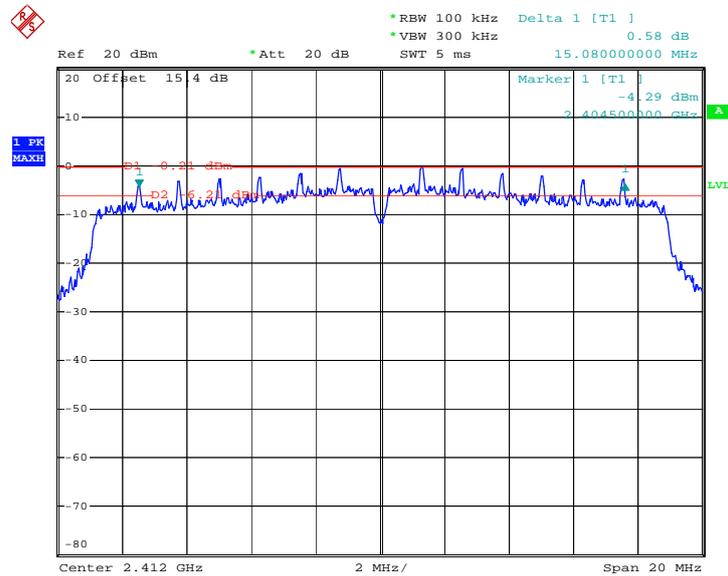

Date: 11.JUL.2011 15:46:20




Mode 8 : 6 dB Bandwidth Plot on 802.11n(BW 20MHz) Channel 06

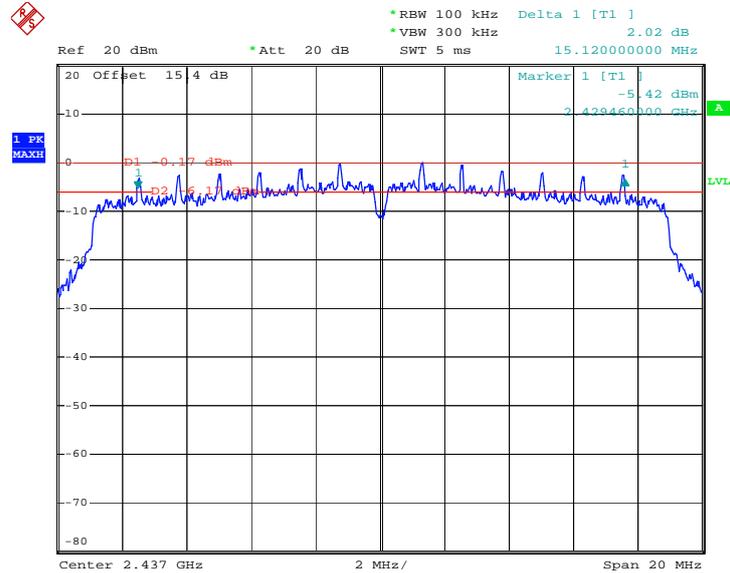

Date: 11.JUL.2011 16:04:17

Mode 9 : 6 dB Bandwidth Plot on 802.11n(BW 20MHz) Channel 11

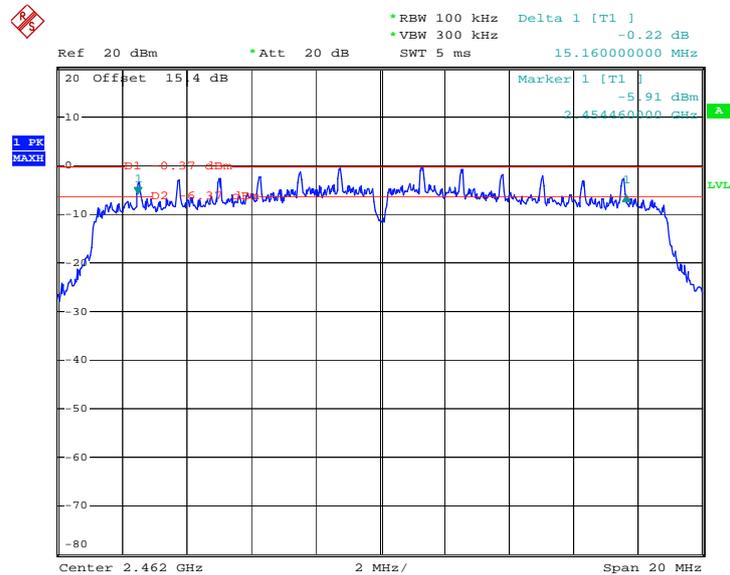

Date: 11.JUL.2011 16:19:08

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the power meter by a low loss cable.
3. Measure the power by power meter.

3.2.4 Test Setup

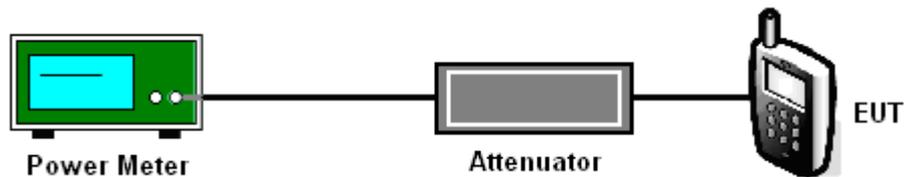

3.2.5 Test Result of Output Power

Test Mode :	Mode 1, 2, 3	Temperature :	23~24°C
Test Engineer :	Jun Liu	Relative Humidity :	54~56%

Channel	Frequency (MHz)	802.11b Measured Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	19.28	30	Pass
06	2437	19.94	30	Pass
11	2462	19.76	30	Pass

Test Mode :	Mode 4, 5, 6	Temperature :	23~24°C
Test Engineer :	Jun Liu	Relative Humidity :	54~56%

Channel	Frequency (MHz)	802.11g Measured Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	19.01	30	Pass
06	2437	19.59	30	Pass
11	2462	19.86	30	Pass

Test Mode :	Mode 7, 8, 9	Temperature :	23~24°C
Test Engineer :	Jun Liu	Relative Humidity :	54~56%

Channel	Frequency (MHz)	802.11n (BW 20MHz) Measured Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	19.45	30	Pass
06	2437	19.76	30	Pass
11	2462	19.24	30	Pass

3.3 Band Edges Measurement

3.3.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB.

3.3.2 Measuring Instruments


See list of measuring instruments of this test report.

3.3.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. Conducted emission test: Set RBW = 100 kHz, Video bandwidth (VBW) \geq RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Apply to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep=Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation as in FCC Section 15.35(b) and (c).

3.3.4 Test Setup

<Radiated Band Edges>

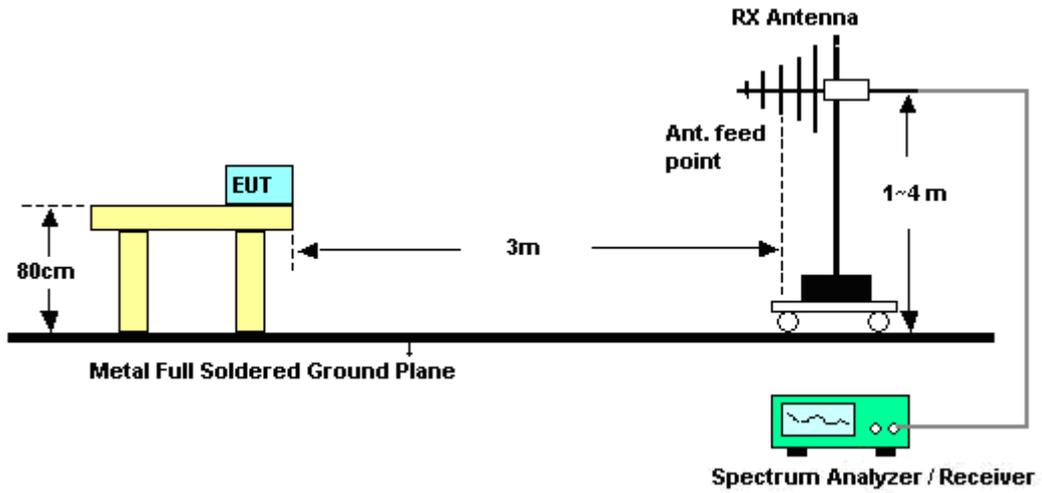

<Conducted Band Edges>

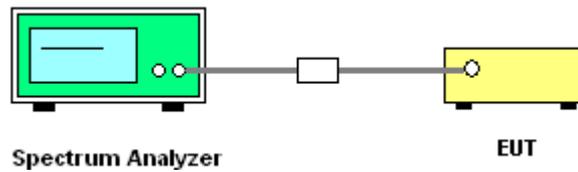



3.3.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	21~22°C
Test Band :	802.11b	Relative Humidity :	41~42%
Test Channel :	01	Test Engineer :	Chenmy Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2333.56	50.8	-23.2	74	48.67	32.76	3.27	33.9	100	350	Peak
2333.56	37.49	-16.51	54	35.36	32.76	3.27	33.9	100	350	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2333.94	53.14	-20.86	74	51.01	32.76	3.27	33.9	100	20	Peak
2333.94	40.34	-13.66	54	38.21	32.76	3.27	33.9	100	20	Average

Test Mode :	Mode 3	Temperature :	21~22°C
Test Band :	802.11b	Relative Humidity :	41~42%
Test Channel :	11	Test Engineer :	Chenmy Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	56.39	-17.61	74	53.9	33.01	3.68	34.2	100	0	Peak
2483.5	40.38	-13.62	54	37.89	33.01	3.68	34.2	100	0	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.66	53.69	-20.31	74	51.2	33.01	3.68	34.2	100	20	Peak
2483.66	40.19	-13.81	54	37.7	33.01	3.68	34.2	100	20	Average



Test Mode :	Mode 4	Temperature :	21~22°C
Test Band :	802.11g	Relative Humidity :	41~42%
Test Channel :	01	Test Engineer :	Chenmy Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.42	59.65	-14.35	74	57.37	32.86	3.47	34.05	100	150	Peak
2389.42	43.87	-10.13	54	41.59	32.86	3.47	34.05	100	150	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2390	61.19	-12.81	74	58.91	32.86	3.47	34.05	100	120	Peak
2390	41.74	-12.26	54	39.46	32.86	3.47	34.05	100	120	Average

Test Mode :	Mode 6	Temperature :	21~22°C
Test Band :	802.11g	Relative Humidity :	41~42%
Test Channel :	11	Test Engineer :	Chenmy Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.8	57.17	-16.83	74	54.68	33.01	3.68	34.2	100	20	Peak
2484.8	41.12	-12.88	54	38.63	33.01	3.68	34.2	100	20	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.04	40.04	-13.96	54	37.55	33.01	3.68	34.2	100	35	Average
2484.04	55.81	-18.19	74	53.32	33.01	3.68	34.2	100	35	Peak



Test Mode :	Mode 7	Temperature :	21~22°C
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	41~42%
Test Channel :	01	Test Engineer :	Chenmy Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.61	61.99	-12.01	74	59.71	32.86	3.47	34.05	120	100	Peak
2389.61	42.56	-11.44	54	40.28	32.86	3.47	34.05	120	100	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.47	58.84	-15.16	74	56.56	32.86	3.47	34.05	100	110	Peak
2388.47	40.95	-13.05	54	38.67	32.86	3.47	34.05	100	110	Average

Test Mode :	Mode 9	Temperature :	21~22°C
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	41~42%
Test Channel :	11	Test Engineer :	Chenmy Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.23	58.99	-15.01	74	56.5	33.01	3.68	34.2	100	360	Peak
2484.23	42.17	-11.83	54	39.68	33.01	3.68	34.2	100	360	Average


ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	56.53	-17.47	74	54.04	33.01	3.68	34.2	100	10	Peak
2483.5	41.47	-12.53	54	38.98	33.01	3.68	34.2	100	10	Average



3.3.6 Test Plots of Conducted Band Edges


Test Mode :	Mode 1 and 3	Temperature :	23~24°C
Test Band :	802.11b	Relative Humidity :	54~56%
Test Channel :	01 and 11	Test Engineer :	Jun Liu

Low Band Edge Plot on 802.11b Channel 01

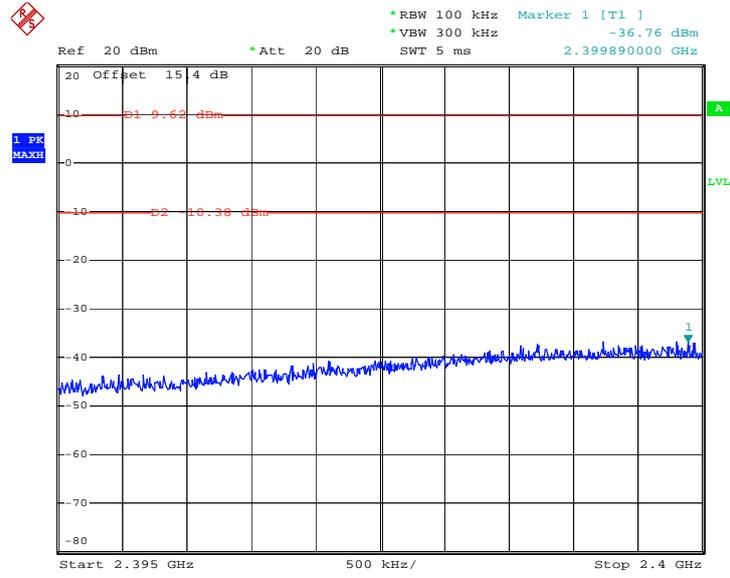

Date: 11.JUL.2011 13:59:04

High Band Edge Plot on 802.11b Channel 11

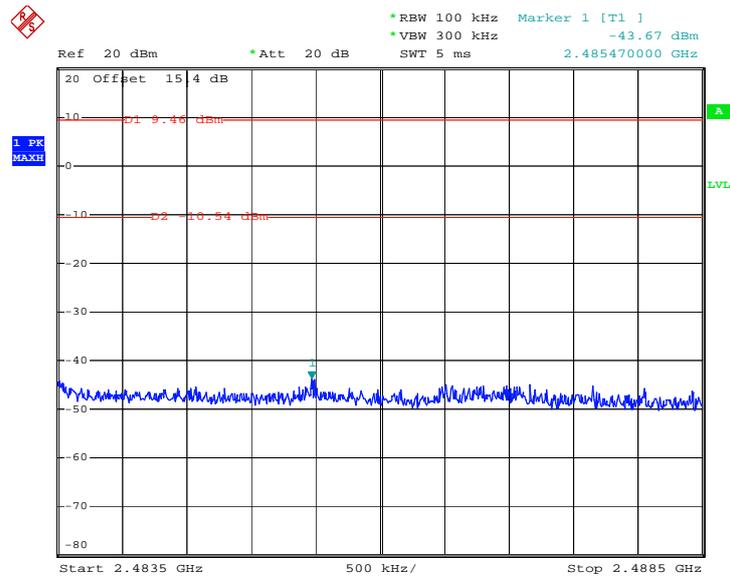


Date: 11.JUL.2011 14:50:48




Test Mode :	Mode 4 and 6	Temperature :	23~24°C
Test Band :	802.11g	Relative Humidity :	54~56%
Test Channel :	01 and 11	Test Engineer :	Jun Liu

Low Band Edge Plot on 802.11g Channel 01

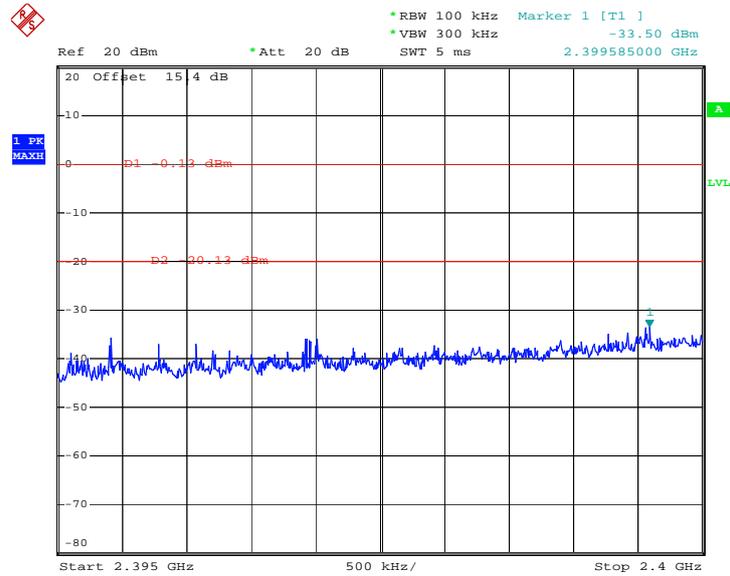

Date: 11.JUL.2011 14:54:49

High Band Edge Plot on 802.11g Channel 11

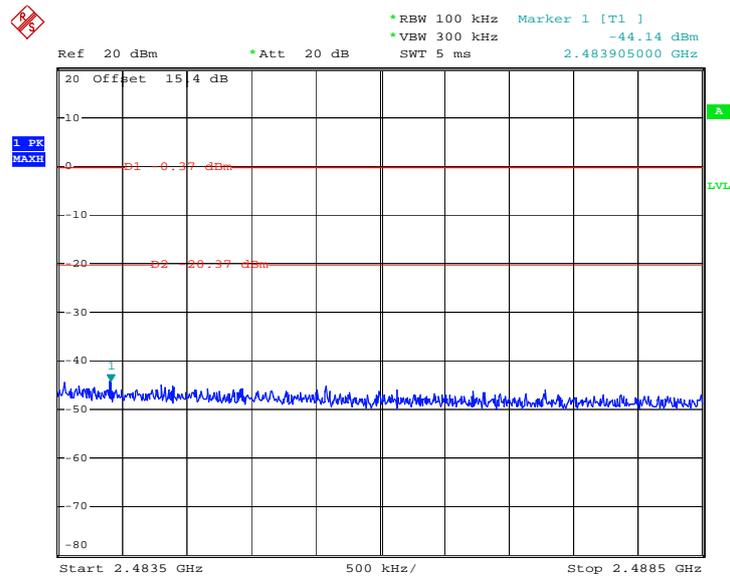


Date: 11.JUL.2011 15:26:02




Test Mode :	Mode 7 and 9	Temperature :	23~24°C
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	54~56%
Test Channel :	01 and 11	Test Engineer :	Jun Liu

Low Band Edge Plot on 802.11n (BW 20MHz) Channel 01

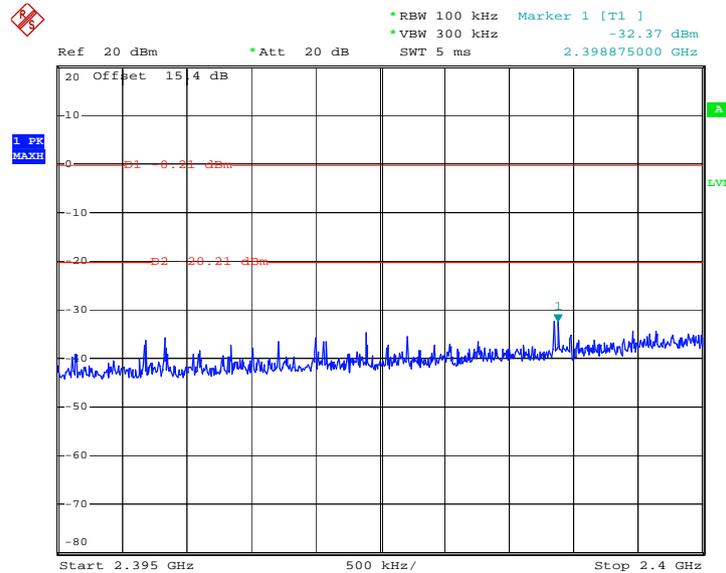

Date: 11.JUL.2011 15:47:55

High Band Edge Plot on 802.11n (BW 20MHz) Channel 11

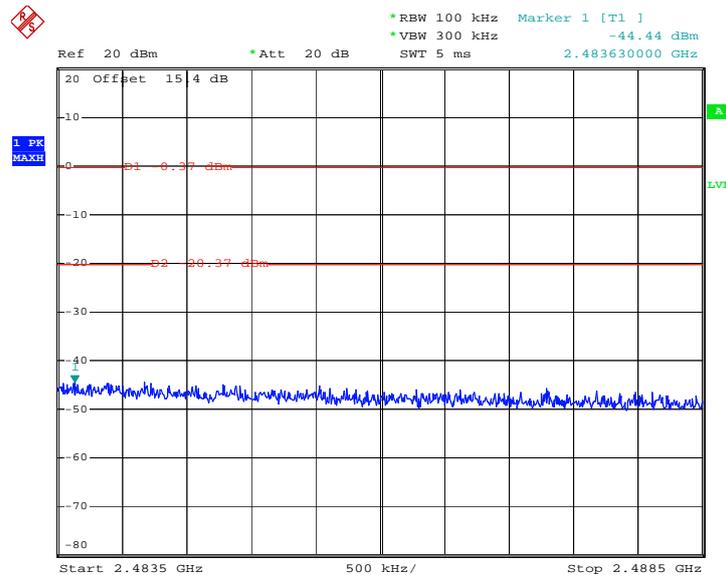

Date: 11.JUL.2011 16:29:52

3.4 Spurious Emission Measurement

3.4.1 Limit of Spurious Emission Measurement

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW) \geq RBW, scan up through 10th harmonic. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

3.4.4 Test Setup

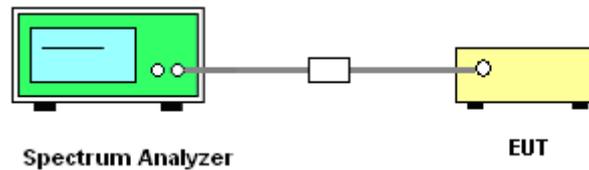




3.4.5 Test Plots of Spurious Emission


Test Mode :	Mode 1	Temperature :	23~24°C
Test Band :	802.11b	Relative Humidity :	54~56%
Test Channel :	01	Test Engineer :	Jun Liu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

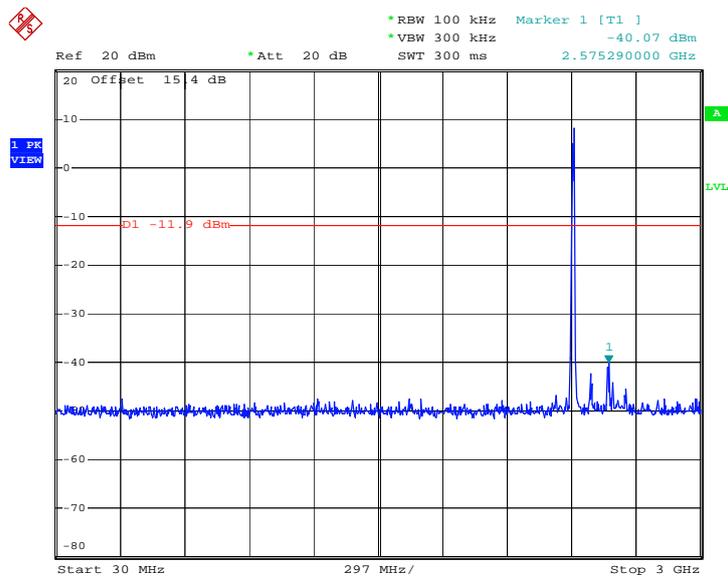

Date: 11.JUL.2011 13:59:57

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

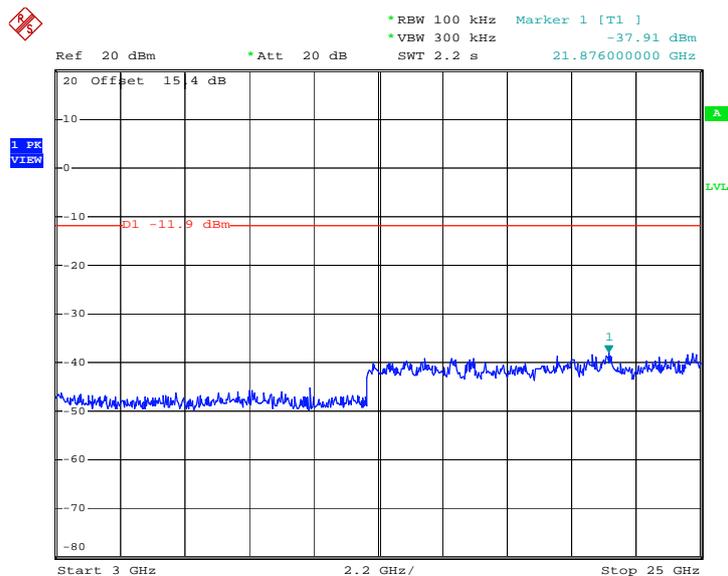


Date: 11.JUL.2011 14:00:14




Test Mode :	Mode 2	Temperature :	23~24°C
Test Band :	802.11b	Relative Humidity :	54~56%
Test Channel :	06	Test Engineer :	Jun Liu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

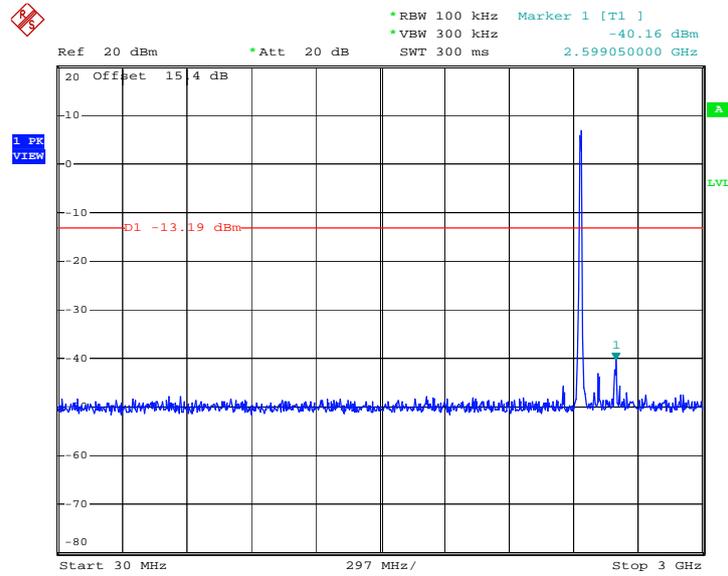

Date: 11.JUL.2011 14:13:14

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

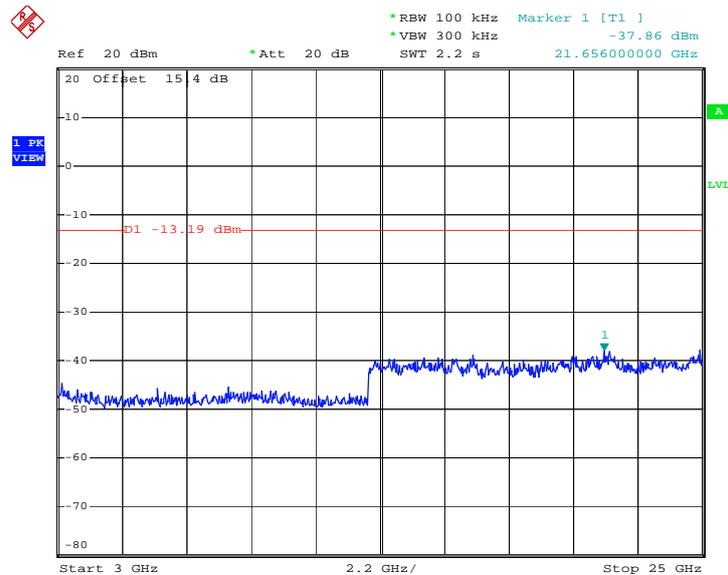


Date: 11.JUL.2011 14:13:32




Test Mode :	Mode 3	Temperature :	23~24°C
Test Band :	802.11b	Relative Humidity :	54~56%
Test Channel :	11	Test Engineer :	Jun Liu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

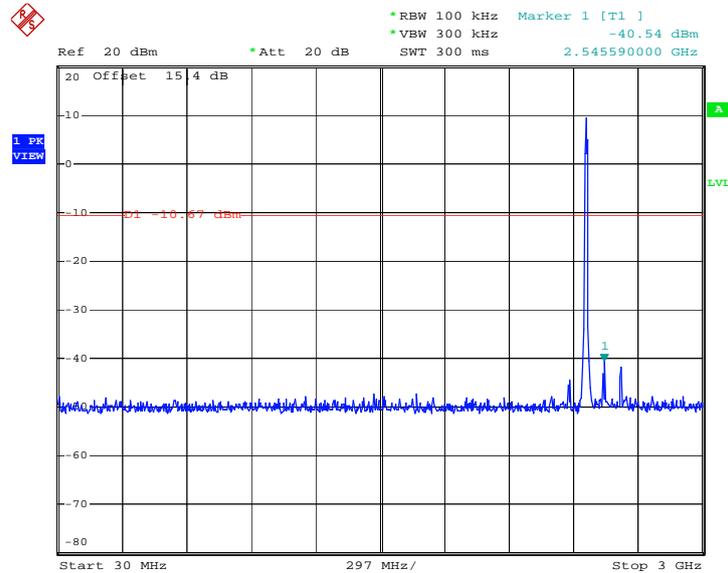

Date: 11.JUL.2011 14:38:53

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

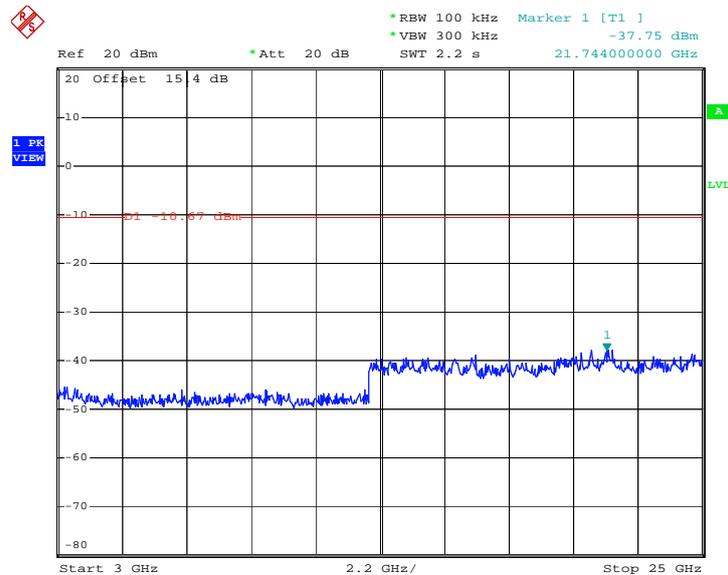


Date: 11.JUL.2011 14:39:10




Test Mode :	Mode 4	Temperature :	23~24°C
Test Band :	802.11g	Relative Humidity :	54~56%
Test Channel :	01	Test Engineer :	Jun Liu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

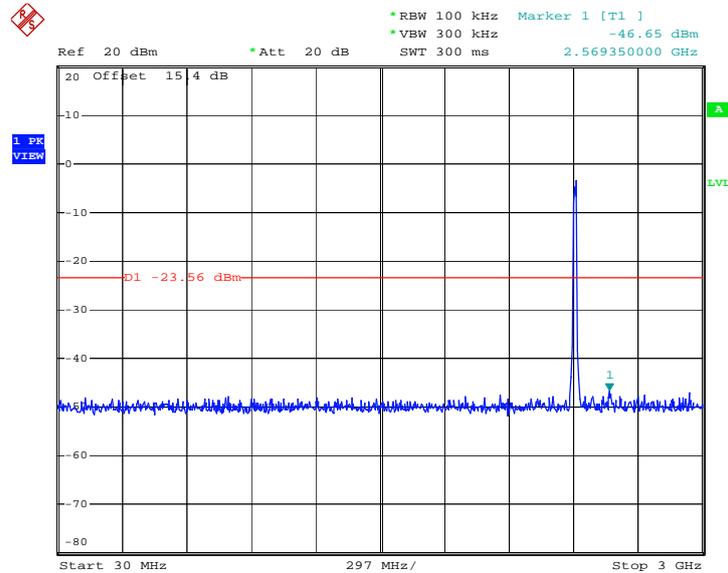

Date: 11.JUL.2011 14:58:50

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

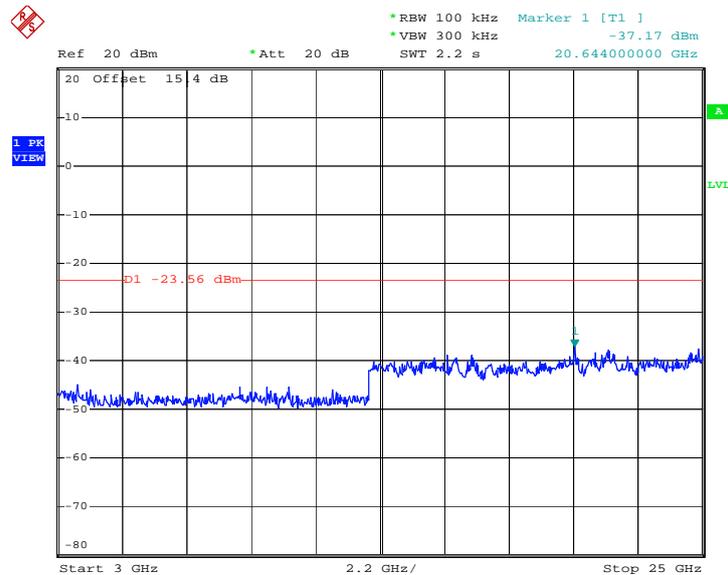


Date: 11.JUL.2011 14:59:07




Test Mode :	Mode 5	Temperature :	23~24
Test Band :	802.11g	Relative Humidity :	54~56
Test Channel :	06	Test Engineer :	Jun Liu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

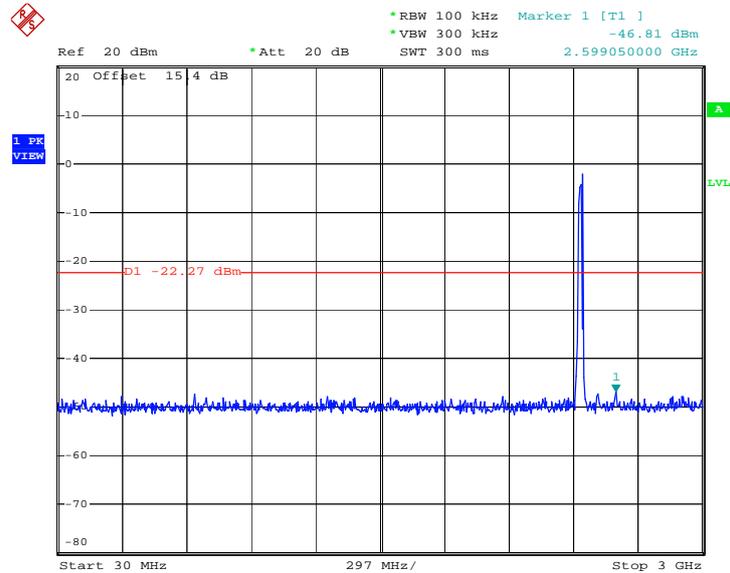

Date: 11.JUL.2011 15:13:05

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

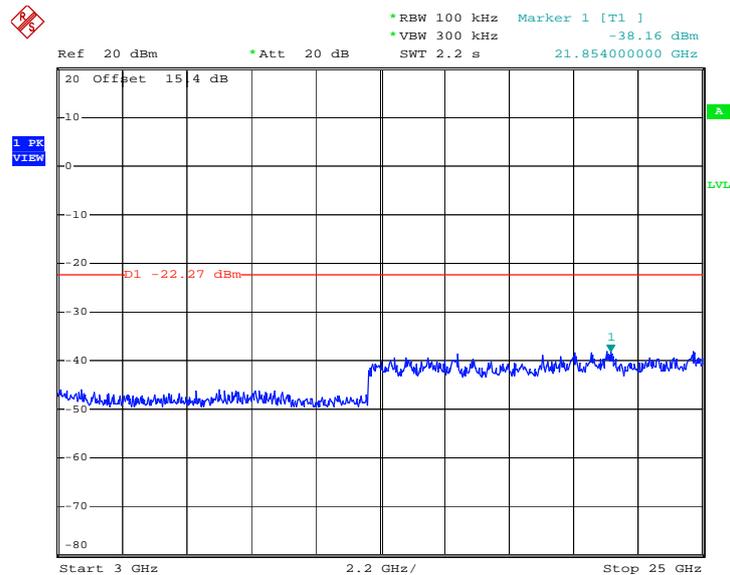


Date: 11.JUL.2011 15:13:22




Test Mode :	Mode 6	Temperature :	23~24°C
Test Band :	802.11g	Relative Humidity :	54~56%
Test Channel :	11	Test Engineer :	Jun Liu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

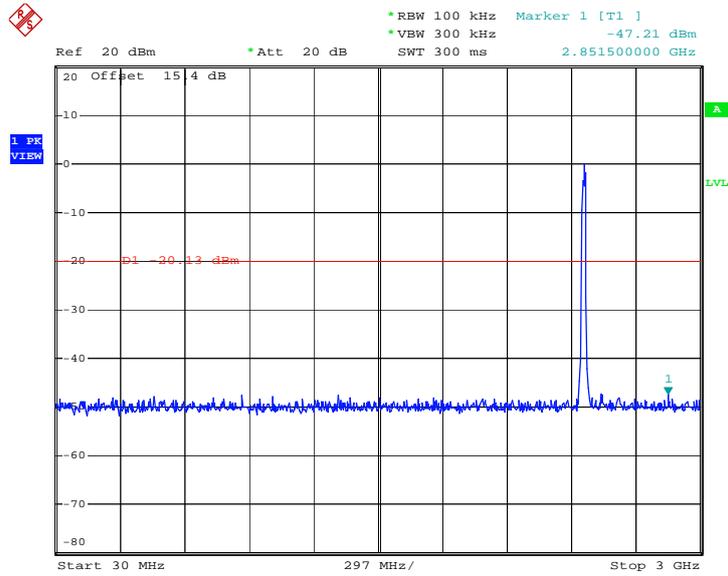

Date: 11.JUL.2011 15:27:59

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

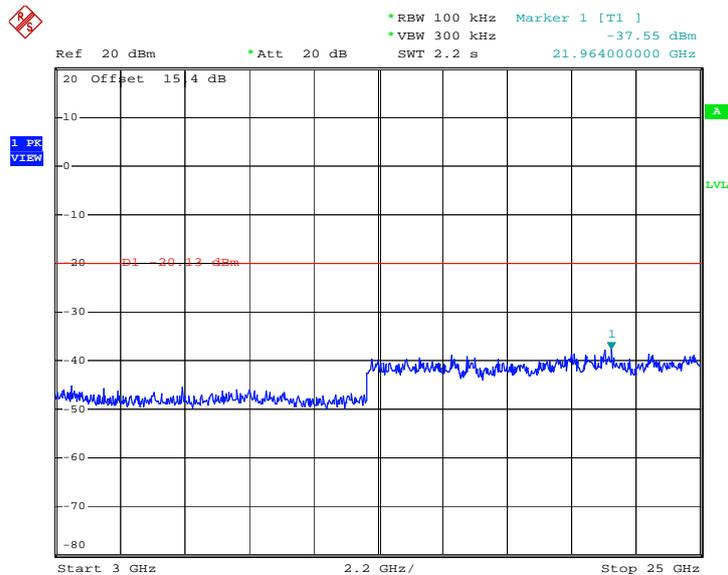


Date: 11.JUL.2011 15:28:16




Test Mode :	Mode 7	Temperature :	23~24°C
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	54~56%
Test Channel :	01	Test Engineer :	Jun Liu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

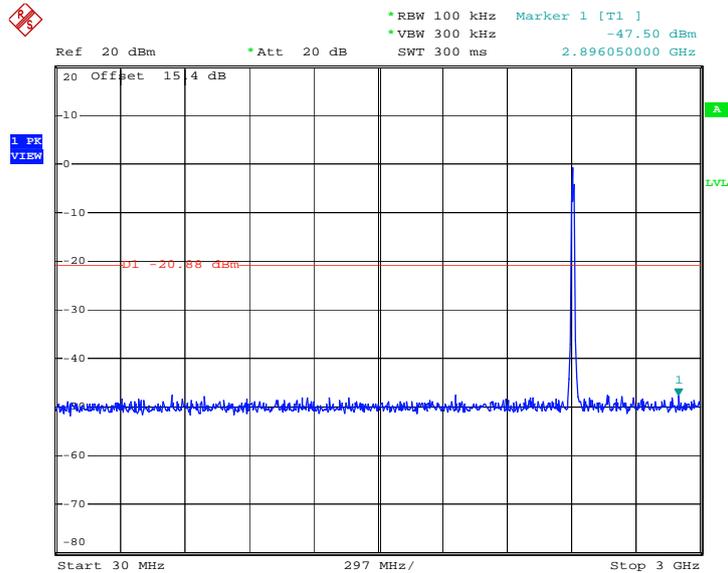

Date: 11.JUL.2011 15:49:00

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

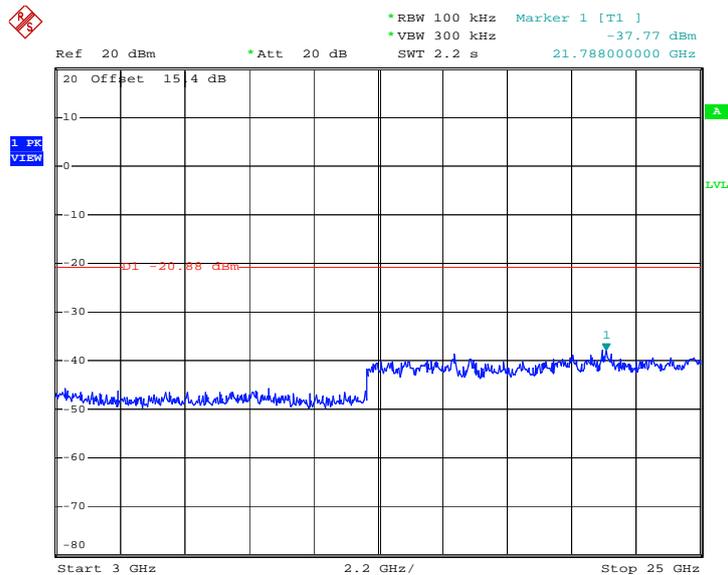


Date: 11.JUL.2011 15:49:17




Test Mode :	Mode 8	Temperature :	23~24°C
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	54~56%
Test Channel :	06	Test Engineer :	Jun Liu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

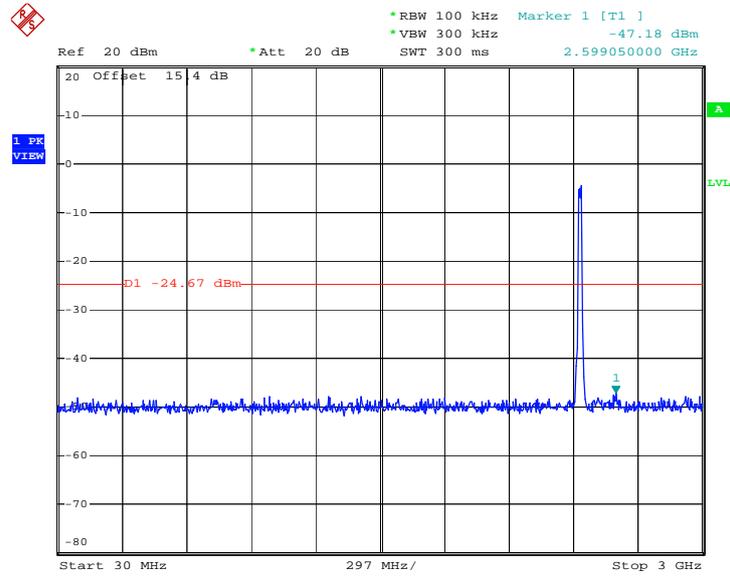

Date: 11.JUL.2011 16:15:07

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

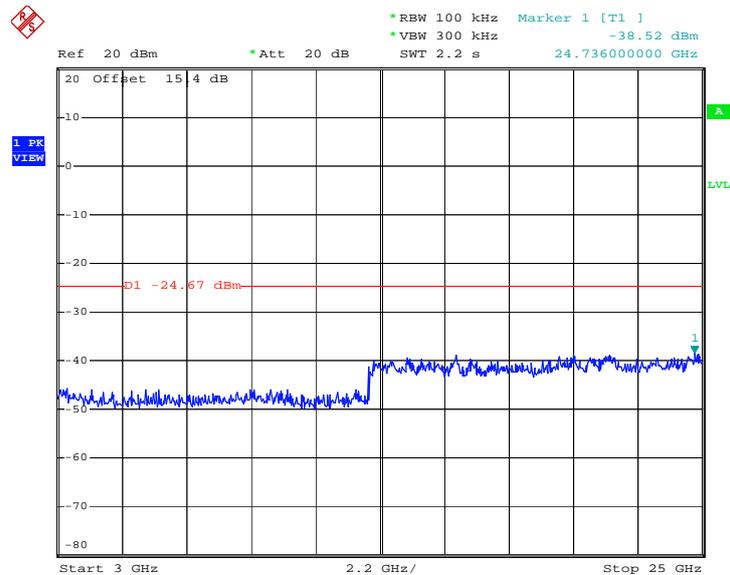


Date: 11.JUL.2011 16:15:24




Test Mode :	Mode 9	Temperature :	23~24°C
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	54~56%
Test Channel :	11	Test Engineer :	Jun Liu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

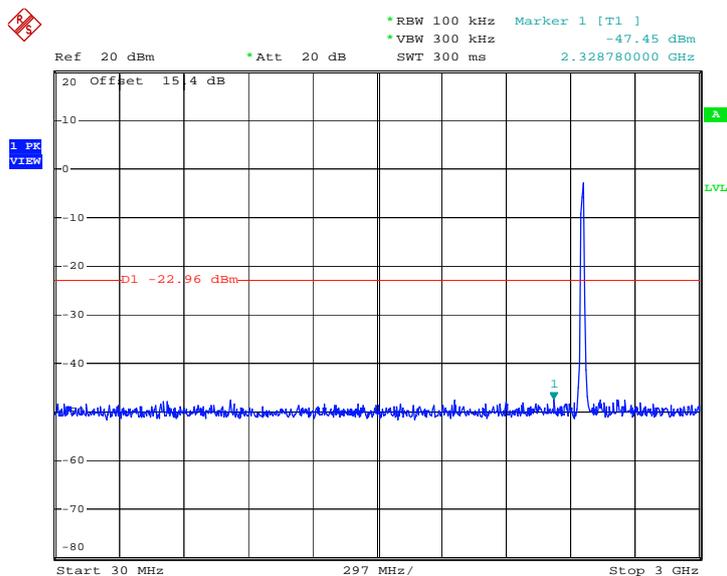

Date: 11.JUL.2011 16:31:25

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

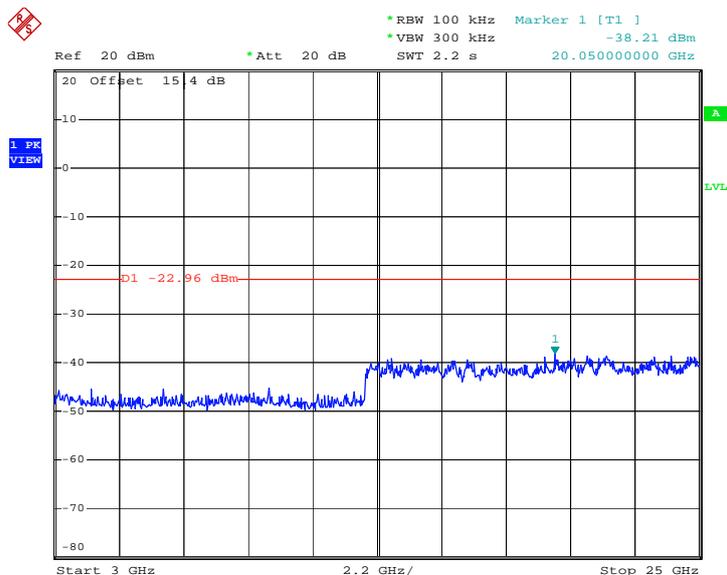

Date: 11.JUL.2011 16:31:42

3.5 Power Spectral Density Measurement

3.5.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The test follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Take the measured data from spectrum analyzer.

3.5.4 Test Setup

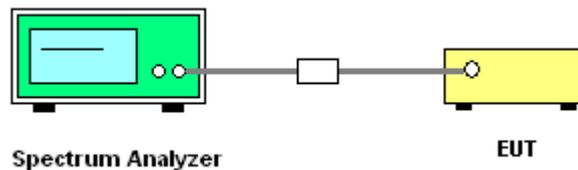




3.5.5 Test Result of Power Spectral Density

Test Mode :	Mode 1, 2, 3	Temperature :	23~24°C
Test Engineer :	Jun Liu	Relative Humidity :	54~56%

Channel	Frequency (MHz)	802.11b Measured PSD (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	-5.25	8	Pass
06	2437	-5.43	8	Pass
11	2462	-5.38	8	Pass


Mode 1 : PSD Plot on 802.11b Channel 01

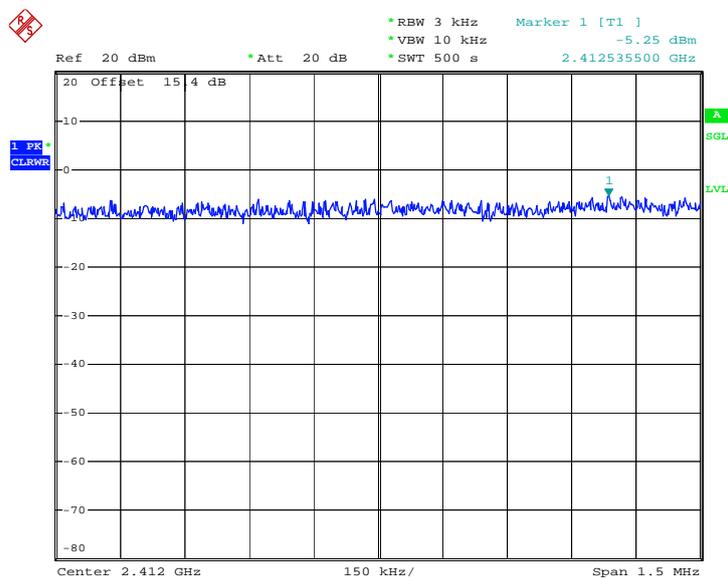

Date: 11.JUL.2011 14:09:19




Mode 2 : PSD Plot on 802.11b Channel 06

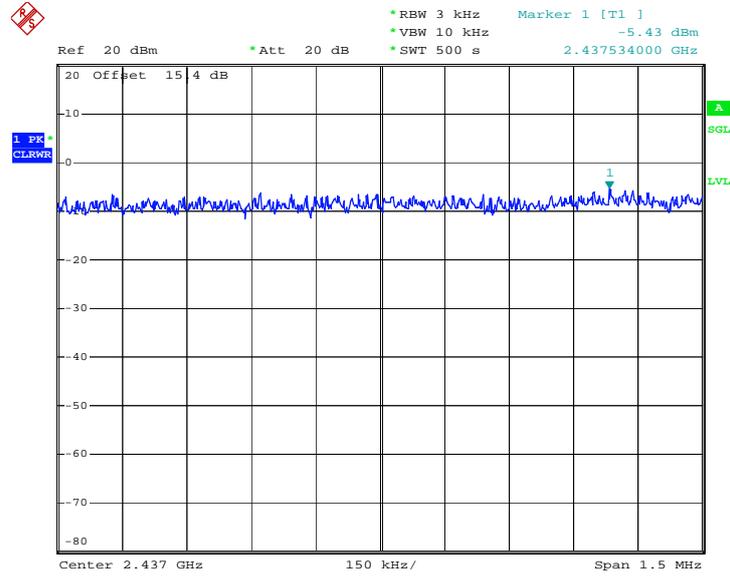

Date: 11.JUL.2011 14:23:07

Mode 3 : PSD Plot on 802.11b Channel 11

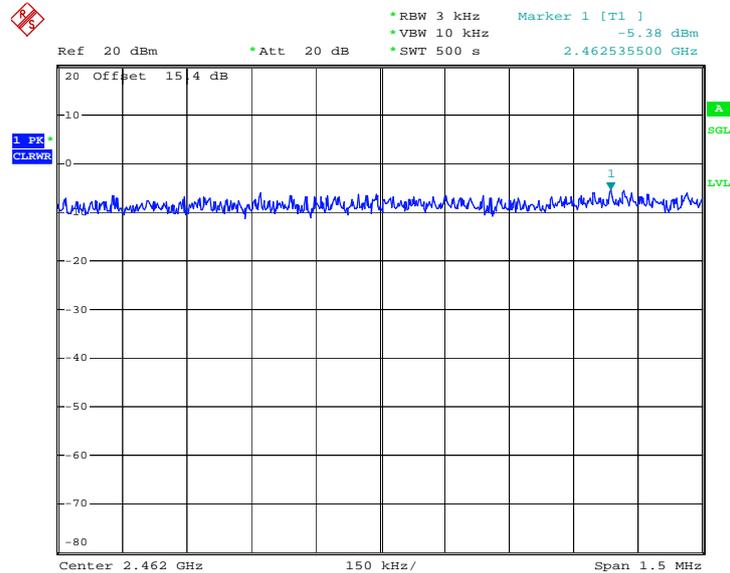


Date: 11.JUL.2011 14:33:02



Test Mode :	Mode 4, 5, 6	Temperature :	23~24°C
Test Engineer :	Jun Liu	Relative Humidity :	54~56%

Channel	Frequency (MHz)	802.11g Measured PSD (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	-14.89	8	Pass
06	2437	-14.47	8	Pass
11	2462	-14.98	8	Pass


Mode 4 : PSD Plot on 802.11g Channel 01

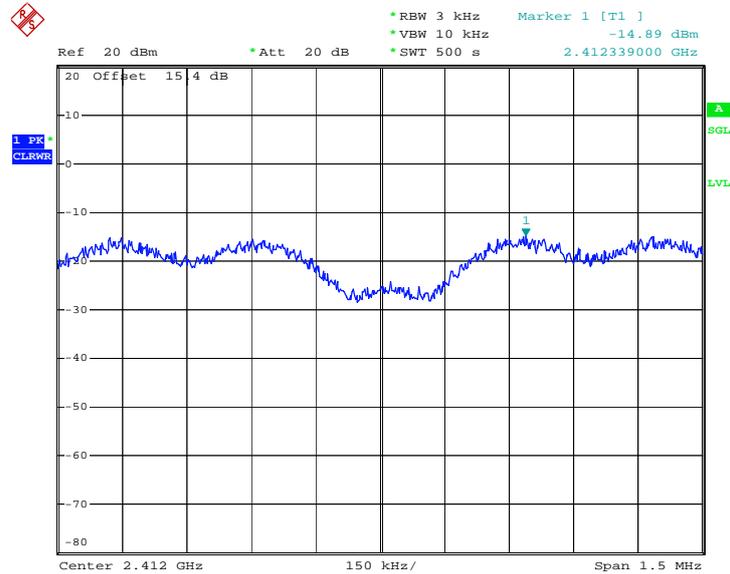

Date: 11.JUL.2011 15:08:09




Mode 5 : PSD Plot on 802.11g Channel 06

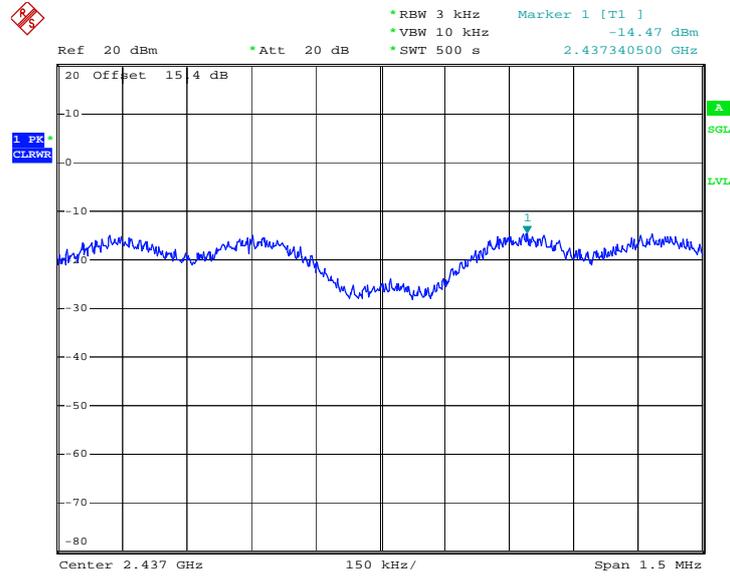

Date: 11.JUL.2011 15:23:00

Mode 6 : PSD Plot on 802.11g Channel 11

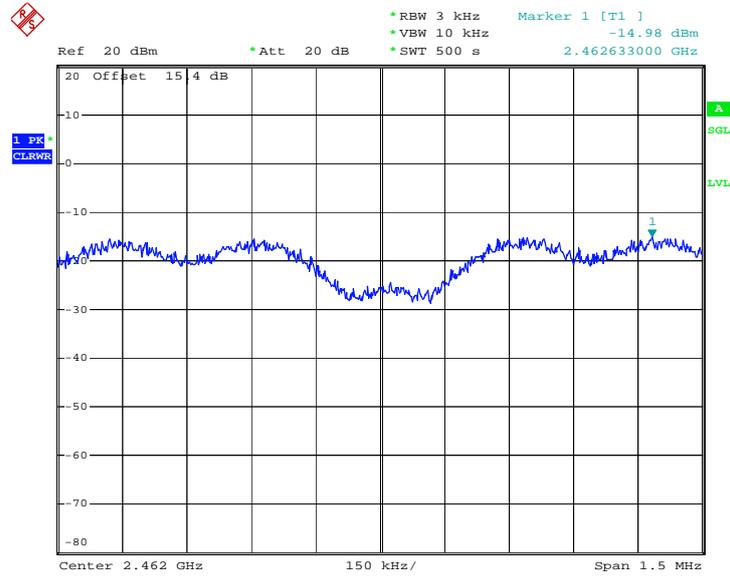


Date: 11.JUL.2011 15:41:52



Test Mode :	Mode 7, 8, 9	Temperature :	23~24°C
Test Engineer :	Jun Liu	Relative Humidity :	54~56%

Channel	Frequency (MHz)	802.11n (BW 20MHz) Measured PSD (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	-13.75	8	Pass
06	2437	-13.69	8	Pass
11	2462	-13.91	8	Pass


Mode 7 : PSD Plot on 802.11n (BW 20MHz) Channel 01

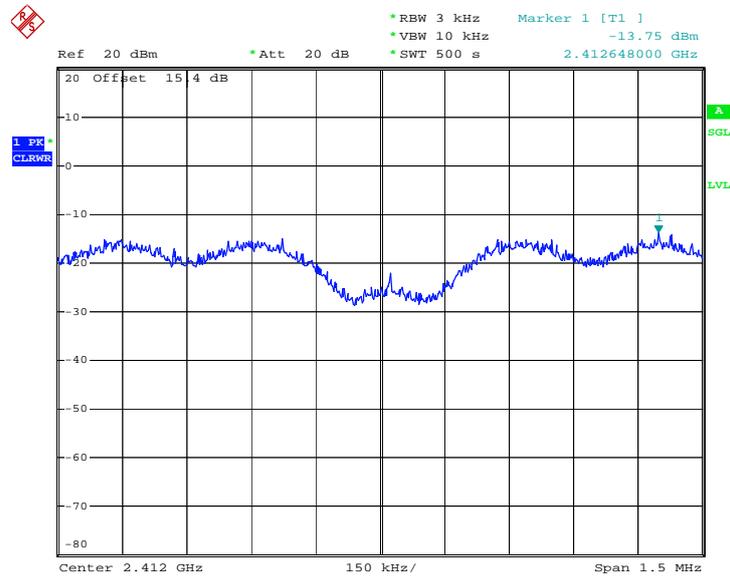

Date: 11.JUL.2011 16:01:19




Mode 8 : PSD Plot on 802.11n (BW 20MHz) Channel 06

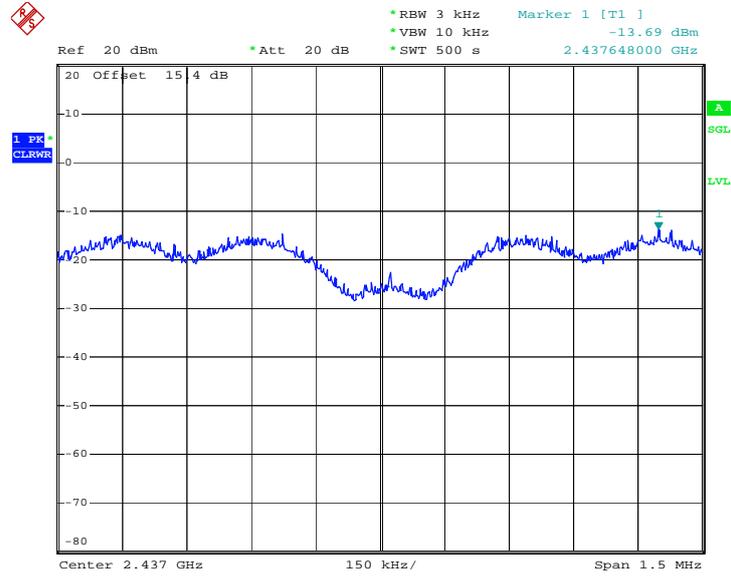

Date: 11.JUL.2011 16:14:08

Mode 9 : PSD Plot on 802.11n (BW 20MHz) Channel 11

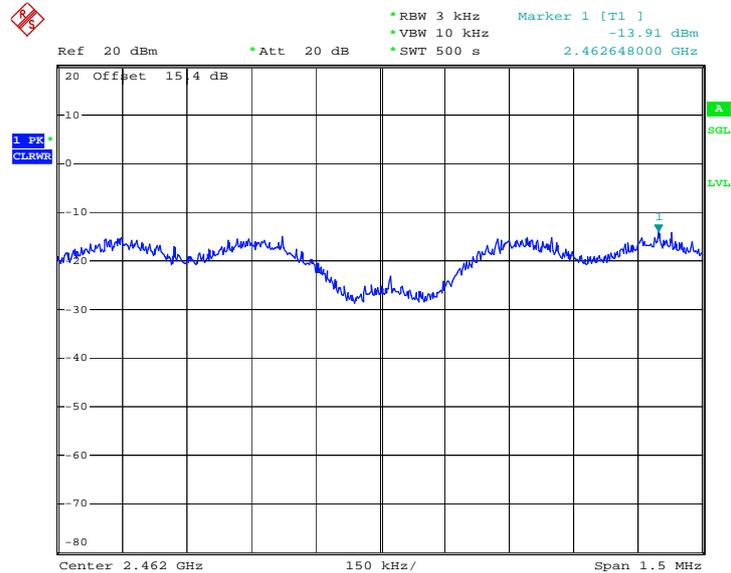

Date: 11.JUL.2011 16:29:05

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures

1. The testing follows the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


3.6.4 Test Setup

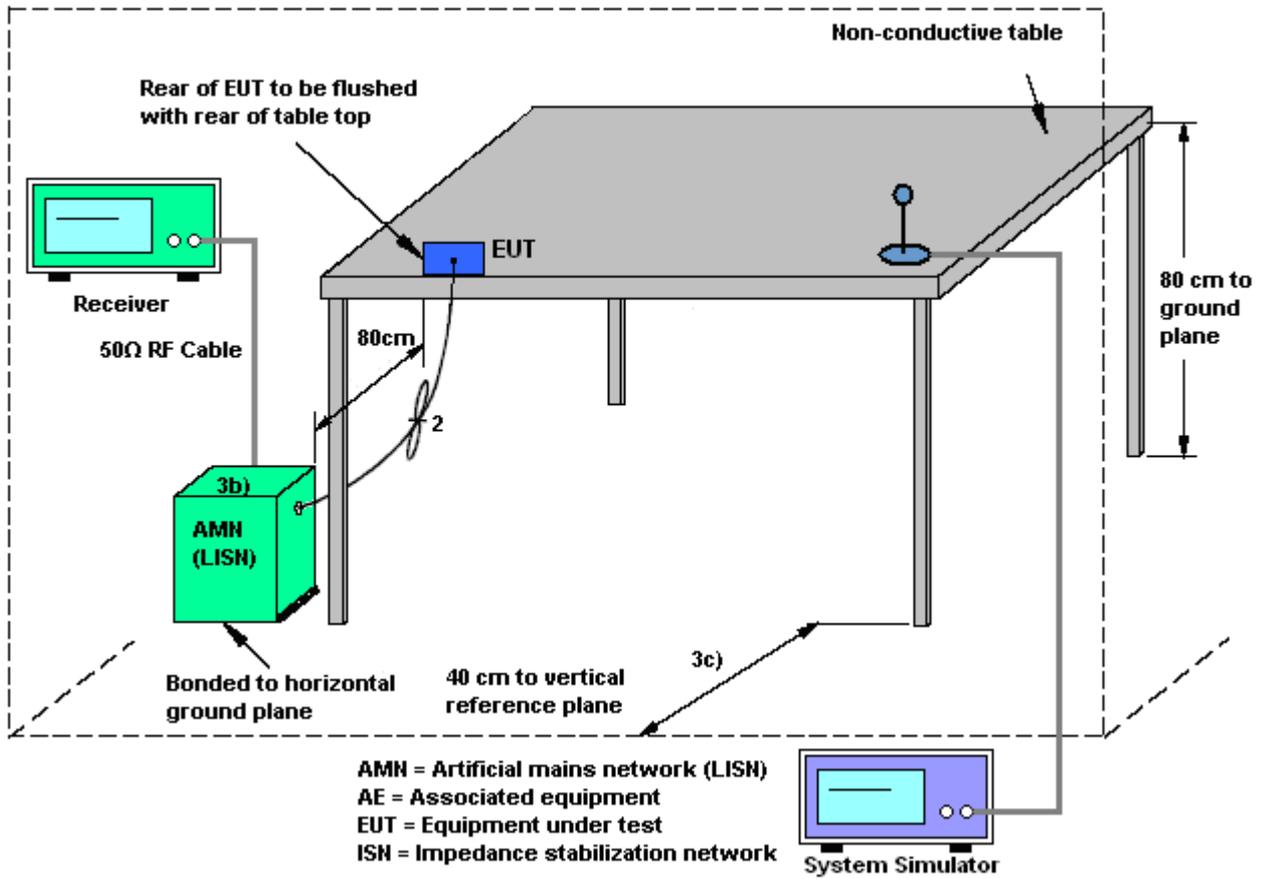



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	21~22°C
Test Engineer :	Chenmy Cheng	Relative Humidity :	41~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM 850 Idle + Bluetooth Idle + WIFI Idle + Adapter + Earphone + FM Rx + GPS Rx		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

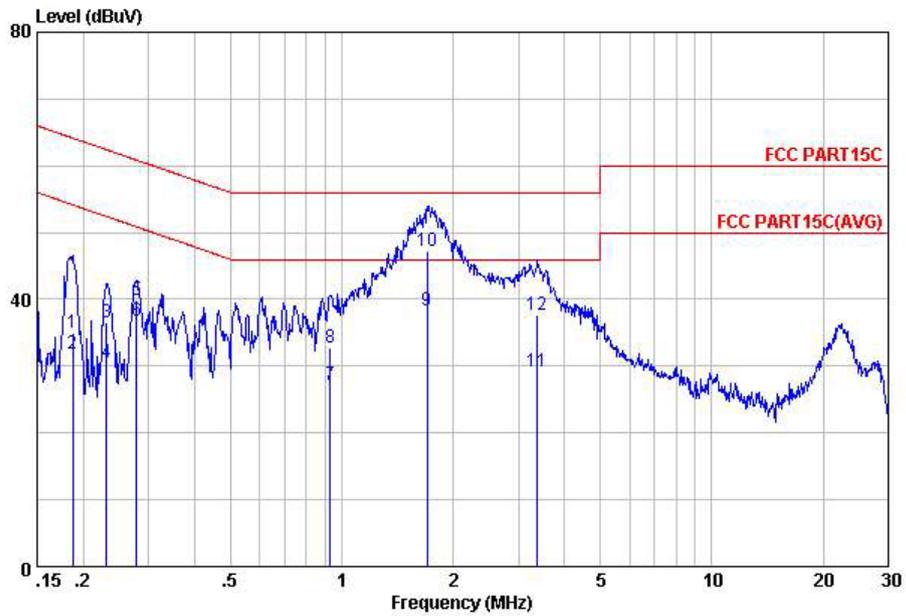


Site : C001-KS
 Condition: FCC PART15C LISN-100807 LINE
 Project : (FR) 170402
 mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
		dBuV	dB	dBuV	dBuV	dB	dB	
1	0.19	35.00	-29.15	64.15	24.92	-0.07	10.15	QP
2	0.19	31.88	-22.27	54.15	21.80	-0.07	10.15	Average
3	0.23	36.49	-25.90	62.39	26.40	-0.07	10.16	QP
4	0.23	30.54	-21.85	52.39	20.45	-0.07	10.16	Average
5	0.28	39.79	-21.06	60.85	29.69	-0.07	10.17	QP
6	0.28	36.74	-14.11	50.85	26.64	-0.07	10.17	Average
7	0.93	27.26	-18.74	46.00	17.10	-0.10	10.26	Average
8	0.93	32.69	-23.31	56.00	22.53	-0.10	10.26	QP
9	1.70	38.37	-7.63	46.00	28.17	-0.11	10.31	Average
10	1.70	47.23	-8.77	56.00	37.03	-0.11	10.31	QP
11	3.38	29.24	-16.76	46.00	18.98	-0.12	10.38	Average
12	3.38	37.56	-18.44	56.00	27.30	-0.12	10.38	QP



Test Mode :	Mode 1	Temperature :	21~22°C
Test Engineer :	Chenmy Cheng	Relative Humidity :	41~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM 850 Idle + Bluetooth Idle + WIFI Idle + Adapter + Earphone + FM Rx + GPS Rx		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

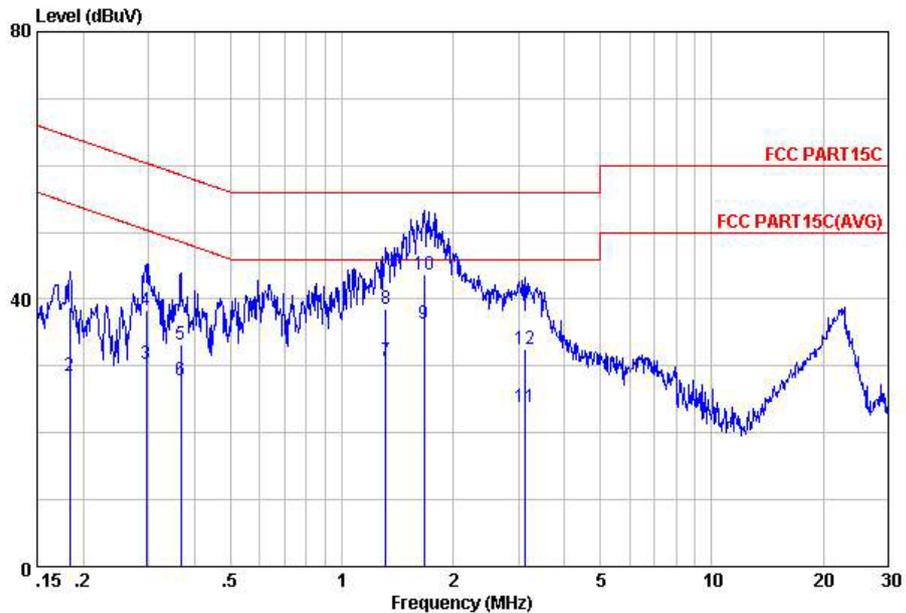

Site : C001-KS
 Condition: FCC PART15C LISN-100807 NEUTRAL
 Project : (FR) 170402
 mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.18	38.87	-25.46	64.33	28.79	-0.07	10.15	QP
2	0.18	28.57	-25.76	54.33	18.49	-0.07	10.15	Average
3	0.30	30.30	-20.07	50.37	20.20	-0.07	10.17	Average
4	0.30	38.27	-22.10	60.37	28.17	-0.07	10.17	QP
5	0.37	33.29	-25.27	58.56	23.19	-0.08	10.18	QP
6	0.37	27.91	-20.65	48.56	17.81	-0.08	10.18	Average
7	1.32	30.72	-15.28	46.00	20.53	-0.10	10.29	Average
8	1.32	38.59	-17.41	56.00	28.40	-0.10	10.29	QP
9	1.67	36.25	-9.75	46.00	26.05	-0.11	10.31	Average
10	1.67	43.61	-12.39	56.00	33.41	-0.11	10.31	QP
11	3.12	23.78	-22.22	46.00	13.53	-0.12	10.37	Average
12	3.12	32.61	-23.39	56.00	22.36	-0.12	10.37	QP

3.7 Radiated Emission Measurement

3.7.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.7.2 Measuring Instruments


See list of measuring instruments of this test report.

3.7.3 Test Procedures


1. The testing follows the guidelines in FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. Use the following spectrum analyzer settings:
 - (1) Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
 - (2) Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.
 Distance extrapolation factor = $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$ (dB)
3. Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

3.7.4 Test Setup


For radiated emissions below 30MHz

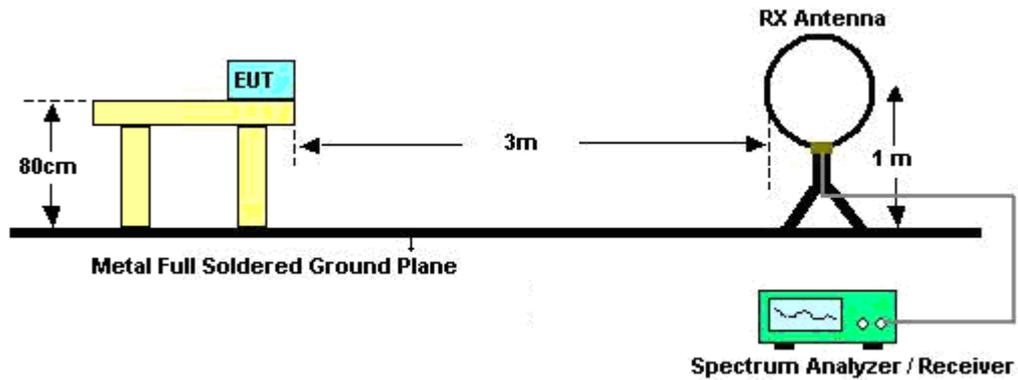

For radiated emissions from 30MHz to 1GHz

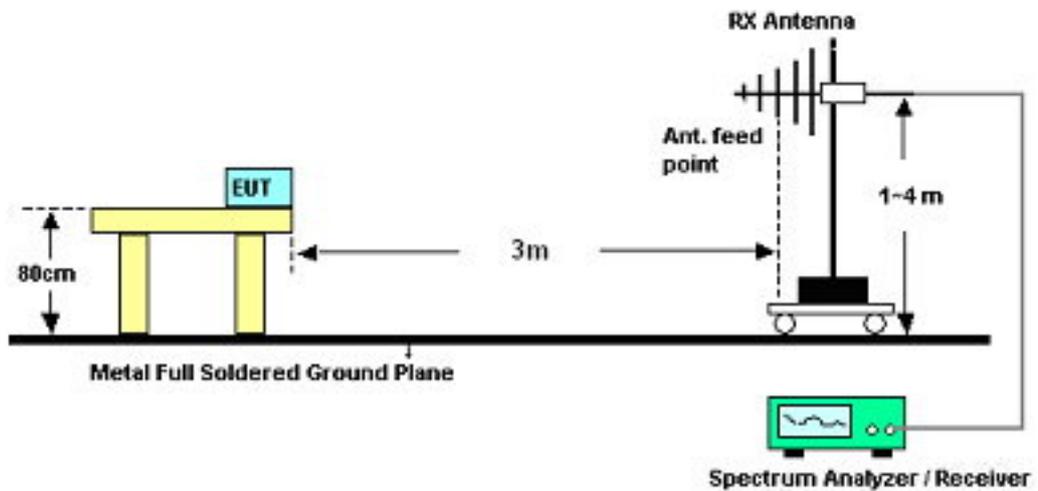

For radiated emissions above 1GHz

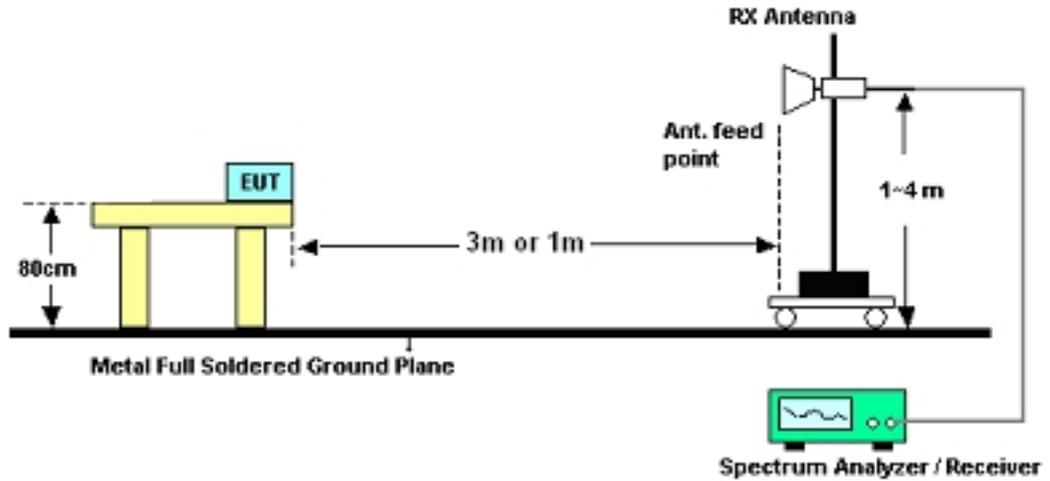

3.7.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	Chenmy Cheng	Temperature :	21~22°C	
		Relative Humidity :	41~42%	
Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.



3.7.6 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	Mode 1	Temperature :	21~22°C
Test Channel :	01	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.08	21.14	-18.86	40	33.68	17.29	0.25	30.08			Peak
122.88	23.44	-20.06	43.5	41.18	11.77	0.46	29.97			Peak
246	25.72	-20.28	46	43.04	11.84	0.67	29.83			Peak
400.1	24.39	-21.61	46	37.38	16	0.84	29.83			Peak
860.7	27.96	-18.04	46	35.81	20.5	1.28	29.63	100	0	Peak
951	31.07	-22.93	54	38.55	20.73	1.33	29.54			Peak
2333.56	50.8	-23.2	74	48.67	32.76	3.27	33.9	100	350	Peak
2333.56	37.49	-16.51	54	35.36	32.76	3.27	33.9	100	350	Average
2412	107.93			105.6	32.89	3.52	34.08	100	352	Peak
2412	66.15			63.82	32.89	3.52	34.08	100	352	Average
2492.4	57.34	-16.66	74	54.8	33.05	3.72	34.23	100	0	Peak
2492.4	43.23	-10.77	54	40.69	33.05	3.72	34.23	100	0	Average



Test Mode :	Mode 1	Temperature :	21~22°C
Test Channel :	01	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.97	28.11	-11.89	40	41.92	16.04	0.24	30.09	100	360	Peak
111.81	24.46	-19.04	43.5	42.2	11.8	0.43	29.97			Peak
246	22.88	-23.12	46	40.2	11.84	0.67	29.83			Peak
483.4	20.17	-25.83	46	32.05	16.93	0.94	29.75			Peak
871.9	27.44	-18.56	46	35.25	20.49	1.29	29.59			Peak
951	32	-22	54	39.48	20.73	1.33	29.54			Peak
2333.94	53.14	-20.86	74	51.01	32.76	3.27	33.9	100	20	Peak
2333.94	40.34	-13.66	54	38.21	32.76	3.27	33.9	100	20	Average
2412	111.64			109.31	32.89	3.52	34.08	100	10	Peak
2412	67.99			65.66	32.89	3.52	34.08	100	10	Average
2495.25	57.47	-16.53	74	54.93	33.05	3.72	34.23	100	350	Peak
2495.25	43.22	-10.78	54	40.68	33.05	3.72	34.23	100	350	Average



Test Mode :	Mode 2	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.62	21.2	-18.8	40	34.5	16.55	0.24	30.09			Peak
122.88	24.12	-19.38	43.5	41.86	11.77	0.46	29.97			Peak
246	26.23	-19.77	46	43.55	11.84	0.67	29.83			Peak
690.6	22.21	-23.79	46	31.57	19.24	1.12	29.72			Peak
896.4	28.52	-17.48	46	36.26	20.45	1.3	29.49	100	0	Peak
951	31.42	-22.58	54	38.9	20.73	1.33	29.54			Peak
2358.45	53.03	-20.97	74	50.82	32.81	3.38	33.98	100	0	Peak
2358.45	40.09	-13.91	54	37.88	32.81	3.38	33.98	100	0	Average
2437	109.61			107.21	32.95	3.6	34.15	100	0	Peak
2437	65.9			63.5	32.95	3.6	34.15	100	0	Average
2498.1	51.28	-22.72	74	48.74	33.05	3.72	34.23	100	350	Peak
2498.1	37.64	-16.36	54	35.1	33.05	3.72	34.23	100	350	Average
7318	53.45	-20.55	74	45.71	36.21	6.61	35.08	100	120	Peak
7318	47.86	-6.14	54	40.12	36.21	6.61	35.08	100	120	Average



Test Mode :	Mode 2	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.89	27.12	-12.88	40	40.42	16.55	0.24	30.09	100	0	Peak
110.46	23.85	-19.65	43.5	41.59	11.8	0.43	29.97			Peak
246	23.7	-22.3	46	41.02	11.84	0.67	29.83			Peak
470.8	20.02	-25.98	46	32.24	16.63	0.92	29.77			Peak
872.6	27.18	-18.82	46	34.99	20.48	1.29	29.58			Peak
951	30.94	-23.06	54	38.42	20.73	1.33	29.54			Peak
2358.45	53.03	-20.97	74	553.03	-500	-500	-500	100	0	Peak
2358.45	40.09	-13.91	54	540.09	-500	-500	-500	100	0	Average
2437	109.61			609.61	-500	-500	-500	100	0	Peak
2437	65.9			565.9	-500	-500	-500	100	0	Average
2498.1	51.28	-22.72	74	551.28	-500	-500	-500	100	350	Peak
2498.1	37.64	-16.36	54	537.64	-500	-500	-500	100	350	Average



Test Mode :	Mode 3	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.89	20.15	-19.85	40	33.45	16.55	0.24	30.09			Peak
122.88	25.54	-17.96	43.5	43.28	11.77	0.46	29.97			Peak
246	28.26	-17.74	46	45.58	11.84	0.67	29.83			Peak
368.6	22.24	-23.76	46	36.33	14.98	0.83	29.9			Peak
897.1	32.15	-13.85	46	39.89	20.45	1.3	29.49	200	360	Peak
951	31.97	-22.03	54	39.45	20.73	1.33	29.54			Peak
2382.01	54.7	-19.3	74	52.46	32.83	3.42	34.01	100	20	Peak
2382.01	40.93	-13.07	54	38.69	32.83	3.42	34.01	100	20	Average
2462	109.96			107.51	32.98	3.64	34.17	100	345	Peak
2462	67.51			65.06	32.98	3.64	34.17	100	345	Average
2483.5	56.39	-17.61	74	53.9	33.01	3.68	34.2	100	0	Peak
2483.5	40.38	-13.62	54	37.89	33.01	3.68	34.2	100	0	Average
7390	55.66	-18.34	74	47.98	36.24	6.66	35.22	100	0	Peak
7390	39.74	-14.26	54	32.06	36.24	6.66	35.22	100	0	Average



Test Mode :	Mode 3	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.97	27.24	-12.76	40	41.05	16.04	0.24	30.09	100	0	Peak
50.25	22.41	-17.59	40	44.86	7.4	0.28	30.13			Peak
246	24.21	-21.79	46	41.53	11.84	0.67	29.83			Peak
678	21.94	-24.06	46	31.4	19.13	1.11	29.7			Peak
872.6	27.15	-18.85	46	34.96	20.48	1.29	29.58			Peak
951	31.53	-22.47	54	39.01	20.73	1.33	29.54			Peak
2384.1	57.41	-16.59	74	55.17	32.83	3.42	34.01	100	28	Peak
2384.1	42.91	-11.09	54	40.67	32.83	3.42	34.01	100	28	Average
2462	109.5			107.05	32.98	3.64	34.17	100	30	Peak
2462	66.76			64.31	32.98	3.64	34.17	100	30	Average
2483.66	53.69	-20.31	74	51.2	33.01	3.68	34.2	100	20	Peak
2483.66	40.19	-13.81	54	37.7	33.01	3.68	34.2	100	20	Average



Test Mode :	Mode 4	Temperature :	21~22°C
Test Channel :	01	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
88.86	21.24	-22.26	43.5	42.23	8.61	0.39	29.99			Peak
122.88	27.81	-15.69	43.5	45.55	11.77	0.46	29.97			Peak
246	27.17	-18.83	46	44.49	11.84	0.67	29.83			Peak
860.7	31.01	-14.99	46	38.86	20.5	1.28	29.63			Peak
936.3	32.13	-13.87	46	39.67	20.67	1.32	29.53	100	156	Peak
960.1	33.81	-20.19	54	41.22	20.79	1.34	29.54			Peak
2389.42	59.65	-14.35	74	57.37	32.86	3.47	34.05	100	150	Peak
2389.42	43.87	-10.13	54	41.59	32.86	3.47	34.05	100	150	Average
2412	103.86			101.53	32.89	3.52	34.08	120	350	Peak
2412	70.86			68.53	32.89	3.52	34.08	120	350	Average
2492.21	53.18	-20.82	74	50.64	33.05	3.72	34.23	100	358	Peak
2492.21	39.76	-14.24	54	37.22	33.05	3.72	34.23	100	358	Average



Test Mode :	Mode 4	Temperature :	21~22°C
Test Channel :	01	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.89	27.65	-12.35	40	40.95	16.55	0.24	30.09	100	260	Peak
50.25	22.87	-17.13	40	45.32	7.4	0.28	30.13			Peak
172.02	24.85	-18.65	43.5	45.12	9.08	0.55	29.9			Peak
657.7	21.52	-24.48	46	31.14	18.95	1.09	29.66			Peak
872.6	26.9	-19.1	46	34.71	20.48	1.29	29.58			Peak
951	31.73	-22.27	54	39.21	20.73	1.33	29.54			Peak
2390	61.19	-12.81	74	58.91	32.86	3.47	34.05	100	120	Peak
2390	41.74	-12.26	54	39.46	32.86	3.47	34.05	100	120	Average
2412	101.16			98.83	32.89	3.52	34.08	100	33	Peak
2412	69.04			66.71	32.89	3.52	34.08	100	33	Average
2495.63	52.75	-21.25	74	50.21	33.05	3.72	34.23	100	30	Peak
2495.63	39.24	-14.76	54	36.7	33.05	3.72	34.23	100	30	Average



Test Mode :	Mode 5	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
116.67	23.27	-20.23	43.5	41	11.8	0.44	29.97			Peak
122.88	28.06	-15.44	43.5	45.8	11.77	0.46	29.97	116	236	Peak
246	28.64	-17.36	46	45.96	11.84	0.67	29.83			Peak
872.6	27.55	-18.45	46	35.36	20.48	1.29	29.58			Peak
951	32.52	-21.48	54	40	20.73	1.33	29.54			Peak
960.1	32.38	-21.62	54	39.79	20.79	1.34	29.54			Peak
2358.83	50.53	-23.47	74	48.32	32.81	3.38	33.98	110	35	Peak
2358.83	37.33	-16.67	54	35.12	32.81	3.38	33.98	110	35	Average
2437	103.95			101.55	32.95	3.6	34.15	110	200	Peak
2437	69.93			67.53	32.95	3.6	34.15	110	200	Average
2495.44	49.26	-24.74	74	46.72	33.05	3.72	34.23	100	60	Peak
2495.44	35.75	-18.25	54	33.21	33.05	3.72	34.23	100	60	Average



Test Mode :	Mode 5	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.35	27.55	-12.45	40	40.09	17.29	0.25	30.08	100	200	Peak
50.25	22.57	-17.43	40	45.02	7.4	0.28	30.13			Peak
172.02	22.19	-21.31	43.5	42.46	9.08	0.55	29.9			Peak
872.6	27.14	-18.86	46	34.95	20.48	1.29	29.58			Peak
951	32.88	-21.12	54	40.36	20.73	1.33	29.54			Peak
960.1	32.7	-21.3	54	40.11	20.79	1.34	29.54			Peak
2357.88	52.11	-21.89	74	49.9	32.81	3.38	33.98	100	100	Peak
2357.88	37.89	-16.11	54	35.68	32.81	3.38	33.98	100	100	Average
2437	102.33			99.93	32.95	3.6	34.15	100	330	Peak
2437	69.13			66.73	32.95	3.6	34.15	100	330	Average
2483.85	36.05	-17.95	54	33.56	33.01	3.68	34.2	100	300	Average
2483.85	49.44	-24.56	74	46.95	33.01	3.68	34.2	100	300	Peak



Test Mode :	Mode 6	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
119.1	23.96	-19.54	43.5	41.68	11.8	0.45	29.97			Peak
122.88	28.3	-15.2	43.5	46.04	11.77	0.46	29.97			Peak
246	28.35	-17.65	46	45.67	11.84	0.67	29.83			Peak
906.2	35.19	-10.81	46	42.91	20.47	1.3	29.49	110	200	Peak
951	32.85	-21.15	54	40.33	20.73	1.33	29.54			Peak
960.1	32.86	-21.14	54	40.27	20.79	1.34	29.54			Peak
2381.06	52.37	-21.63	74	50.13	32.83	3.42	34.01	100	10	Peak
2381.06	39.63	-14.37	54	37.39	32.83	3.42	34.01	100	10	Average
2462	102.28			99.83	32.98	3.64	34.17	100	0	Peak
2462	69.92			67.47	32.98	3.64	34.17	100	0	Average
2484.8	57.17	-16.83	74	54.68	33.01	3.68	34.2	100	20	Peak
2484.8	41.12	-12.88	54	38.63	33.01	3.68	34.2	100	20	Average



Test Mode :	Mode 6	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.35	27.41	-12.59	40	39.95	17.29	0.25	30.08	120	200	Peak
49.98	23.21	-16.79	40	45.66	7.4	0.28	30.13			Peak
172.02	22.57	-20.93	43.5	42.84	9.08	0.55	29.9			Peak
872.6	27.03	-18.97	46	34.84	20.48	1.29	29.58			Peak
951	33.1	-20.9	54	40.58	20.73	1.33	29.54			Peak
960.1	32.9	-21.1	54	40.31	20.79	1.34	29.54			Peak
2380.11	53.1	-20.9	74	50.86	32.83	3.42	34.01	100	35	Peak
2380.11	38.16	-15.84	54	35.92	32.83	3.42	34.01	100	35	Average
2462	100.66			98.21	32.98	3.64	34.17	100	33	Peak
2462	69.15			66.7	32.98	3.64	34.17	100	33	Average
2484.04	40.04	-13.96	54	37.55	33.01	3.68	34.2	100	35	Average
2484.04	55.81	-18.19	74	53.32	33.01	3.68	34.2	100	35	Peak



Test Mode :	Mode 7	Temperature :	21~22°C
Test Channel :	01	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.81	20.82	-19.18	40	33.36	17.29	0.25	30.08			Peak
122.88	27.2	-16.3	43.5	44.94	11.77	0.46	29.97	130	200	Peak
246	28.12	-17.88	46	45.44	11.84	0.67	29.83			Peak
872.6	27.26	-18.74	46	35.07	20.48	1.29	29.58			Peak
951	32.49	-21.51	54	39.97	20.73	1.33	29.54			Peak
960.1	31.5	-22.5	54	38.91	20.79	1.34	29.54			Peak
2389.61	61.99	-12.01	74	59.71	32.86	3.47	34.05	120	100	Peak
2389.61	42.56	-11.44	54	40.28	32.86	3.47	34.05	120	100	Average
2412	100.37			98.04	32.89	3.52	34.08	100	0	Peak
2412	67.82			65.49	32.89	3.52	34.08	100	0	Average
2496.39	52.22	-21.78	74	49.68	33.05	3.72	34.23	100	120	Peak
2496.39	38.85	-15.15	54	36.31	33.05	3.72	34.23	100	120	Average



Test Mode :	Mode 7	Temperature :	21~22°C
Test Channel :	01	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.97	28.33	-11.67	40	42.14	16.04	0.24	30.09	120	160	Peak
109.65	23.68	-19.82	43.5	41.42	11.8	0.43	29.97			Peak
246	24.12	-21.88	46	41.44	11.84	0.67	29.83			Peak
872.6	26.74	-19.26	46	34.55	20.48	1.29	29.58			Peak
951	32.49	-21.51	54	39.97	20.73	1.33	29.54			Peak
960.1	31.13	-22.87	54	38.54	20.79	1.34	29.54			Peak
2388.47	58.84	-15.16	74	56.56	32.86	3.47	34.05	100	110	Peak
2388.47	40.95	-13.05	54	38.67	32.86	3.47	34.05	100	110	Average
2412	102.68			100.35	32.89	3.52	34.08	100	120	Peak
2412	68.66			66.33	32.89	3.52	34.08	100	120	Average
2492.21	53.32	-20.68	74	50.78	33.05	3.72	34.23	120	230	Peak
2492.21	39.01	-14.99	54	36.47	33.05	3.72	34.23	120	230	Average



Test Mode :	Mode 8	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.08	19.77	-20.23	40	32.31	17.29	0.25	30.08			Peak
122.88	26.08	-17.42	43.5	43.82	11.77	0.46	29.97	100	100	Peak
246	26.69	-19.31	46	44.01	11.84	0.67	29.83			Peak
872.6	26.62	-19.38	46	34.43	20.48	1.29	29.58			Peak
951	32.14	-21.86	54	39.62	20.73	1.33	29.54			Peak
960.1	30.34	-23.66	54	37.75	20.79	1.34	29.54			Peak
2358.26	50.32	-23.68	74	48.11	32.81	3.38	33.98	100	350	Peak
2358.26	37.43	-16.57	54	35.22	32.81	3.38	33.98	100	350	Average
2437	101			98.6	32.95	3.6	34.15	100	360	Peak
2437	68.66			66.26	32.95	3.6	34.15	100	360	Average
2496.77	48.88	-25.12	74	46.34	33.05	3.72	34.23	100	0	Peak
2496.77	37.05	-16.95	54	34.51	33.05	3.72	34.23	100	0	Average



Test Mode :	Mode 8	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
33.24	28.41	-11.59	40	42.22	16.04	0.24	30.09	100	120	Peak
50.79	23.06	-16.94	40	45.51	7.4	0.28	30.13			Peak
111	24.1	-19.4	43.5	41.84	11.8	0.43	29.97			Peak
872.6	28.14	-17.86	46	35.95	20.48	1.29	29.58			Peak
951	32.09	-21.91	54	39.57	20.73	1.33	29.54			Peak
960.1	30.39	-23.61	54	37.8	20.79	1.34	29.54			Peak
2357.5	51.45	-22.55	74	49.24	32.81	3.38	33.98	100	10	Peak
2357.5	37.95	-16.05	54	35.74	32.81	3.38	33.98	100	10	Average
2437	100.85			98.45	32.95	3.6	34.15	100	12	Peak
2437	68.18			65.78	32.95	3.6	34.15	100	12	Average
2489	48.67	-25.33	74	46.13	33.05	3.72	34.23	100	10	Peak
2489	36.6	-17.4	54	34.06	33.05	3.72	34.23	100	10	Average



Test Mode :	Mode 9	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
119.1	24.11	-19.39	43.5	41.83	11.8	0.45	29.97			Peak
122.88	25.63	-17.87	43.5	43.37	11.77	0.46	29.97			Peak
246	26.29	-19.71	46	43.61	11.84	0.67	29.83			Peak
894.3	32.42	-13.58	46	40.16	20.46	1.3	29.5	120	100	Peak
951	33	-21	54	40.48	20.73	1.33	29.54			Peak
960.1	30.88	-23.12	54	38.29	20.79	1.34	29.54			Peak
2380.68	52.32	-21.68	74	50.08	32.83	3.42	34.01	100	100	Peak
2380.68	39.25	-14.75	54	37.01	32.83	3.42	34.01	100	100	Average
2462	99.27			96.82	32.98	3.64	34.17	100	10	Peak
2462	67.51			65.06	32.98	3.64	34.17	100	10	Average
2484.23	58.99	-15.01	74	56.5	33.01	3.68	34.2	100	360	Peak
2484.23	42.17	-11.83	54	39.68	33.01	3.68	34.2	100	360	Average



Test Mode :	Mode 9	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.97	27.72	-12.28	40	41.53	16.04	0.24	30.09	110	100	Peak
49.98	21.62	-18.38	40	44.07	7.4	0.28	30.13			Peak
111.81	22.91	-20.59	43.5	40.65	11.8	0.43	29.97			Peak
872.6	28.5	-17.5	46	36.31	20.48	1.29	29.58			Peak
951	32.68	-21.32	54	40.16	20.73	1.33	29.54			Peak
960.1	31.66	-22.34	54	39.07	20.79	1.34	29.54			Peak
2384.48	52.08	-21.92	74	49.84	32.83	3.42	34.01	120	0	Peak
2384.48	39.19	-14.81	54	36.95	32.83	3.42	34.01	120	0	Average
2462	100.86			98.41	32.98	3.64	34.17	100	0	Peak
2462	68.37			65.92	32.98	3.64	34.17	100	0	Average
2483.5	56.53	-17.47	74	54.04	33.01	3.68	34.2	100	10	Peak
2483.5	41.47	-12.53	54	38.98	33.01	3.68	34.2	100	10	Average



3.8 Antenna Requirements

3.8.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.8.2 Antenna Connected Construction

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

3.8.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Jan. 07, 2011	Jan. 06, 2012	Conducted (TH01-KS)
Power Meter	Agilent	E4416A	MY451015 55	N/A	Aug. 24, 2010	Aug. 23, 2011	Conducted (TH01-KS)
Power Sensor	Agilent	E9327A	MY444211 98	N/A	Aug. 24, 2010	Aug. 23, 2011	Conducted (TH01-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz	Jun. 02, 2011	Jun. 01, 2012	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Jan. 07, 2011	Jan. 06, 2012	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Jan. 07, 2011	Jan. 06, 2012	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	N/A	Nov. 10, 2010	Nov. 09, 2011	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 16, 2010	Nov. 15, 2011	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Jan. 07, 2011	Jan. 06, 2012	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 07, 2010	Dec. 06, 2011	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	00075959	1GHz~18GHz	Jan. 07, 2011	Jan. 06, 2012	Radiation (03CH01-KS)
Amplifier	Wireless	FPA-6592G	060004	30MHz~2GHz	Dec. 09, 2010	Dec. 08, 2011	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A023 70	1GHz~26.5GHz	Jan. 07, 2011	Jan. 06, 2012	Radiation (03CH01-KS)
Actice hore antenna	com-power	AHA-118	701023	1G-18GHz	Nov. 09, 2010	Nov. 08, 2011	Radiation (03CH01-KS)
Signal Generator	R&S	SMR40	100455	10MHz~40GHz	Jan. 06, 2011	Jan. 05, 2012	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA1702 49	15-40GHz	Oct. 15, 2010	Oct. 14, 2011	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	860004/00 1	9 kHz~30 MHz	Jul. 29, 2010	Jul. 28, 2011	Radiation (03CH01-KS)
Bluetooth Base Station	ANRITSU	MT8852B	6K000049 35	BT EDR	Sep. 17, 2010	Sep. 16, 2011	-
System Simulator	R&S	CMU200	837587/06 6	Full-Band	Jan. 07, 2011	Jan. 06, 2012	-

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
Combined Standard Uncertainty $U_c(y)$	1.13		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26		

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		



Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	±0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	±1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	±0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site Imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				



Appendix A. Photographs of EUT

Please refer to Sporton report number EP170402 as below.