

FCC PART 15B

MEASUREMENT AND TEST REPORT

For

ZTE Corporation

ZTE Plaza, Hi-Tech, Industrial Park, Nanshan District,
Shenzhen, Guangdong, P.R. of China

FCC ID: Q78-ZXDSL931WII

Report Type: Original Report	Product Type: VDSL CPE
Test Engineer: <u>Bruce Zhang</u>	<i>Bruce Zhang</i>
Report Number: <u>RSZ10121605</u>	
Report Date: <u>2011-01-18</u>	
Reviewed By: <u>EMC Engineer</u>	<i>Merry Zhao</i>
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....3
 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)3
 OBJECTIVE3
 RELATED SUBMITTAL(S)/GRANT(S).....3
 TEST METHODOLOGY3
 TEST FACILITY3

SYSTEM TEST CONFIGURATION.....5
 JUSTIFICATION5
 EUT EXERCISE SOFTWARE5
 EQUIPMENT MODIFICATIONS5
 LOCAL SUPPORT EQUIPMENT LIST AND DETAILS5
 EXTERNAL I/O CABLE.....5
 CONFIGURATION OF TEST SETUP5
 BLOCK DIAGRAM OF TEST SETUP6

SUMMARY OF TEST RESULTS7

FCC §15.107 – AC LINE CONDUCTED EMISSIONS.....8
 MEASUREMENT UNCERTAINTY8
 EUT SETUP8
 EMI TEST RECEIVER SETUP.....9
 TEST EQUIPMENT LIST AND DETAILS.....9
 TEST PROCEDURE9
 TEST RESULTS SUMMARY.....9
 TEST DATA9

FCC §15.109 - RADIATED SPURIOUS EMISSIONS12
 MEASUREMENT UNCERTAINTY12
 EUT SETUP12
 EMI TEST RECEIVER SETUP.....13
 TEST EQUIPMENT LIST AND DETAILS.....13
 TEST PROCEDURE13
 CORRECTED AMPLITUDE & MARGIN CALCULATION13
 TEST RESULTS SUMMARY.....14
 TEST DATA14

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *ZTE Corporation's* product, model number: *ZXDSL 931WII (FCC ID: Q78-ZXDSL931WII)* or the "EUT" as referred to in this report is a *VDSL CPE*, which measures approximately: 21.2 cm (L) x 4.9 cm (W) x 18.8 cm (H), rated input voltage: DC 12V adapter.

Adapter information:

Model: MSP-C2000IC12.0-24W-US;

Input: AC 100-240V 50/60 Hz 0.8A Max;

Output: DC 12.0V 2A.

All measurement and test data in this report was gathered from production sample serial number: 1012071 (Assigned by BACL, Shenzhen). The EUT was received on 2010-12-16.

Objective

This Type approval report is prepared on behalf of *ZTE Corporation* in accordance with Part 2, Subpart J, Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine compliance with FCC Part 15B.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS submission with FCC ID: Q78-ZXDSL931WII

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a manufacturer testing fashion.

EUT Exercise Software

N/A

Equipment Modifications

No modification was made to the unit tested.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
DELL	Laptop	D600	00045-438-852-864	DoC
ARESCOM	20-PORT CONCENTRATOR	CDS 6020	N/A	N/A


External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded detachable Power Line	1.5	Adapter	EUT

Configuration of Test Setup

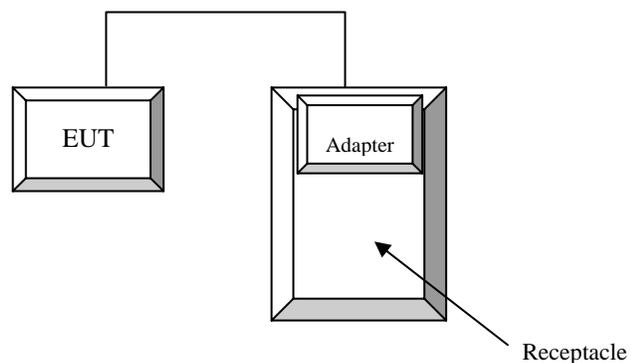

Block Diagram of Test Setup

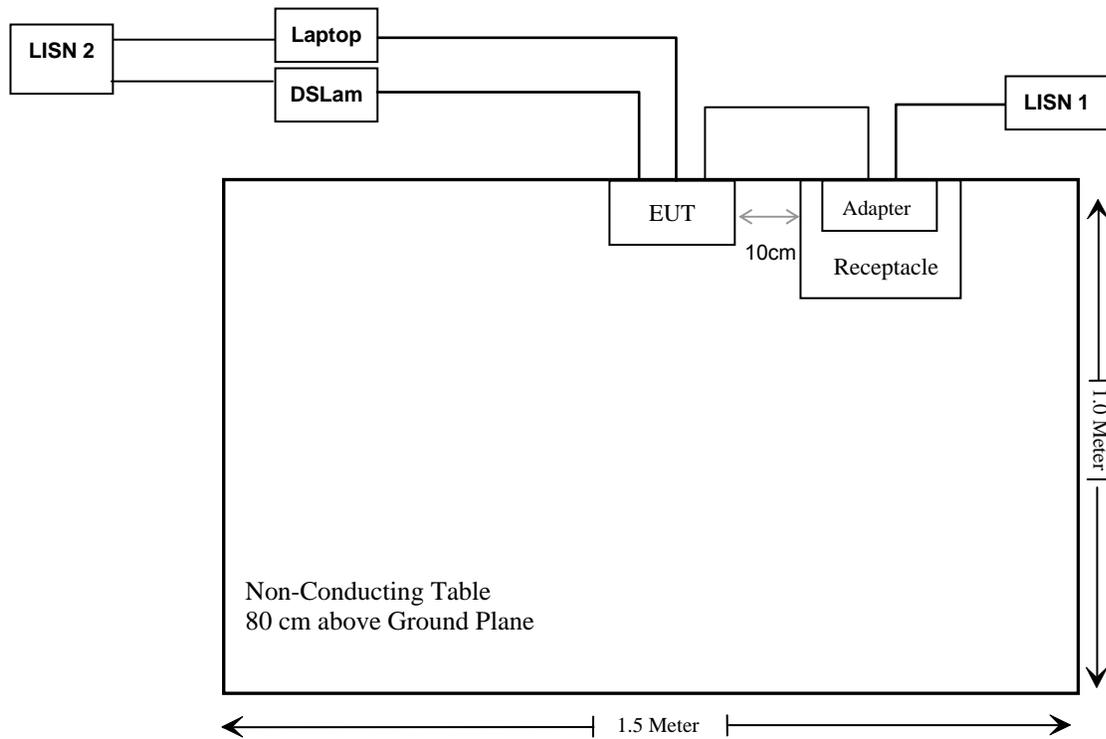

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Spurious Emissions	Compliance


FCC §15.107 – AC LINE CONDUCTED EMISSIONS

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 2.4 dB.

EUT Setup

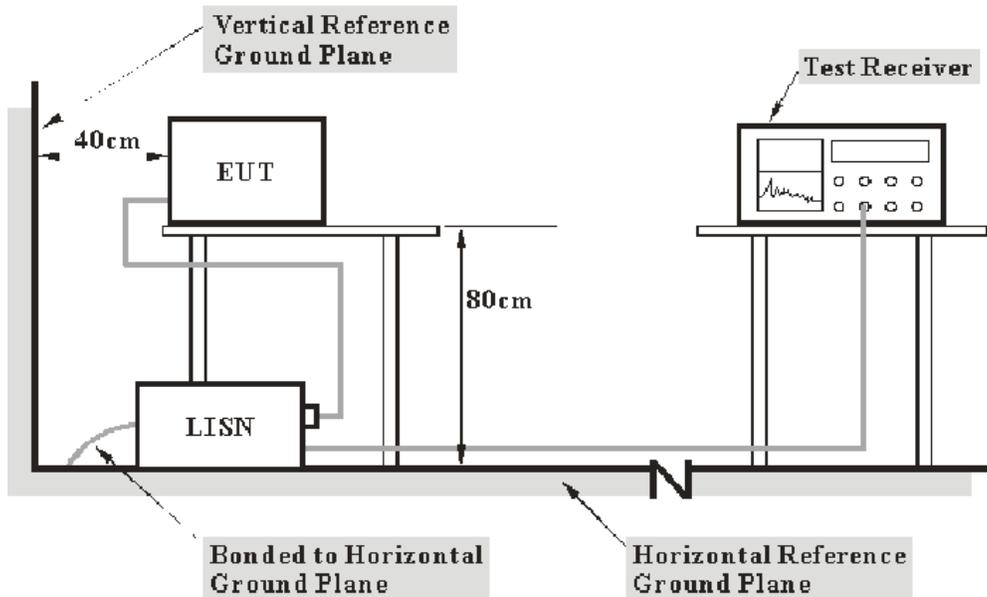

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.107 limits.

The spacing between the peripherals was 10 cm.

The adapter of EUT connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>IF B/W</i>
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2010-03-03	2011-03-02
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2010-03-09	2011-03-08
SCHAFFNER	CDN	CDN T400	16913	2010-11-24	2011-11-24

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the adapter of EUT was connected to the outlet of the first LISN, the other support equipment were connected to the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15 Class B, with the worst margin reading of:

11.81 dB at 0.565 MHz in the **Neutral** conductor mode

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa

The testing was performed by Bruce Zhang on 2011-01-13.


Test Mode: Operating

120V, 60 Hz Line:

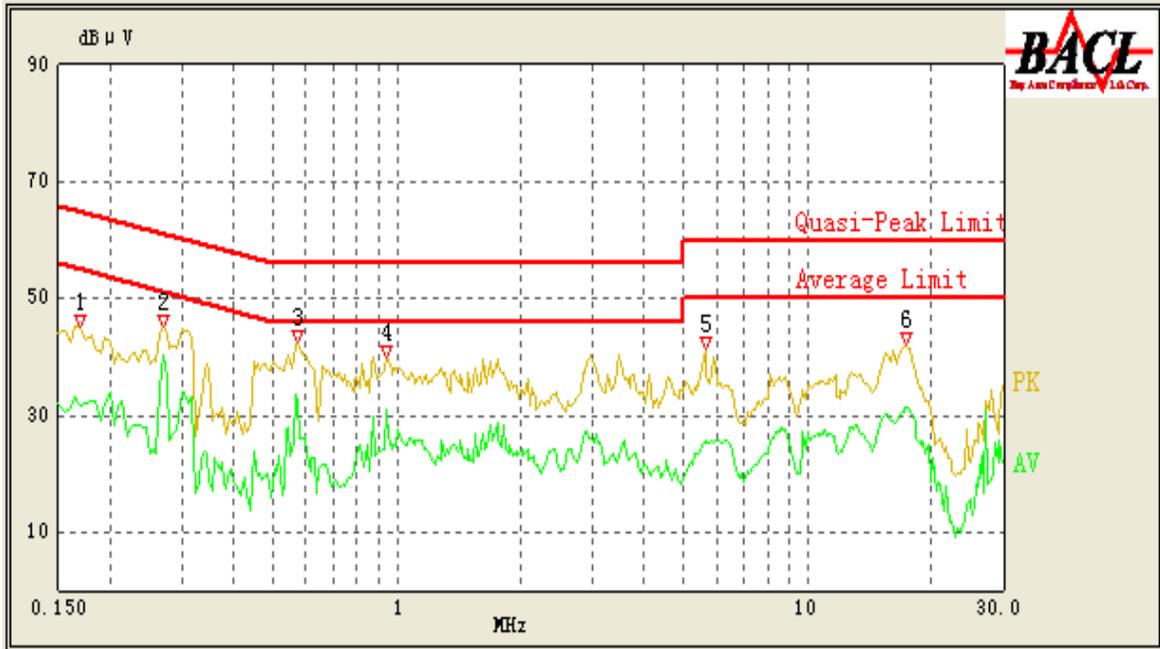

Conducted Emissions			FCC Part 15.107, Class B		
Frequency (MHz)	Corrected Factor (dB)	Cord. Result (dBµV)	Limit (dBµV)	Margin (dB)	Remark (PK/QP/Ave)
0.270	40.50	10.02	52.57	12.07	AV
0.575	32.56	10.18	46.00	13.44	AV
0.945	31.10	10.11	46.00	14.90	AV
17.290	31.37	10.17	50.00	18.63	AV
0.575	36.50	10.18	56.00	19.50	QP
0.945	36.29	10.11	56.00	19.71	QP
0.270	41.77	10.02	62.57	20.80	QP
17.360	37.72	10.17	60.00	22.28	QP
0.170	31.82	10.09	55.43	23.61	AV
0.170	41.58	10.09	65.43	23.85	QP
5.650	25.56	10.10	50.00	24.44	AV
5.625	31.20	10.10	60.00	28.80	QP

120V, 60 Hz Neutral:

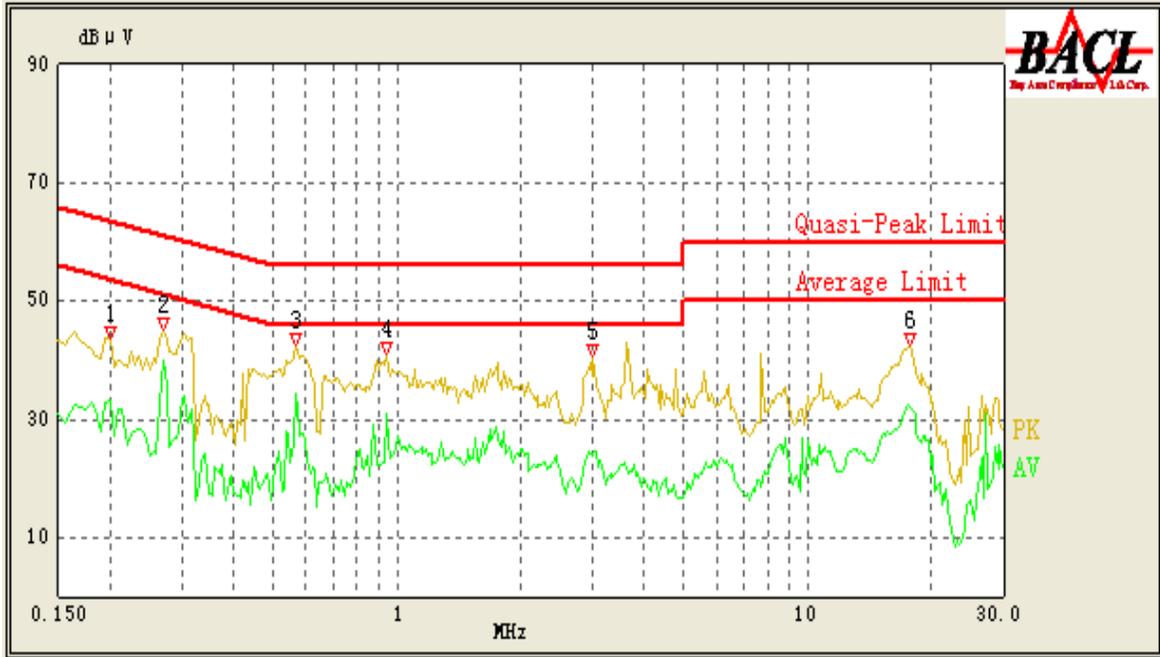

Conducted Emissions			FCC Part 15.107, Class B		
Frequency (MHz)	Corrected Factor (dB)	Cord. Result (dBµV)	Limit (dBµV)	Margin (dB)	Remark (PK/QP/Ave)
0.565	34.19	10.19	46.00	11.81	AV
0.270	39.91	10.02	52.57	12.66	AV
0.945	31.10	10.11	46.00	14.90	AV
17.695	32.22	10.18	50.00	17.78	AV
0.570	37.29	10.19	56.00	18.71	QP
0.945	36.29	10.11	56.00	19.71	QP
0.270	41.79	10.02	62.57	20.78	QP
0.200	33.06	10.07	54.57	21.51	AV
2.995	24.09	10.15	46.00	21.91	AV
17.755	37.04	10.18	60.00	22.96	QP
3.000	31.56	10.15	56.00	24.44	QP
0.200	38.02	10.07	64.57	26.55	QP


FCC §15.109 - RADIATED SPURIOUS EMISSIONS

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 4.0 dB.

EUT Setup

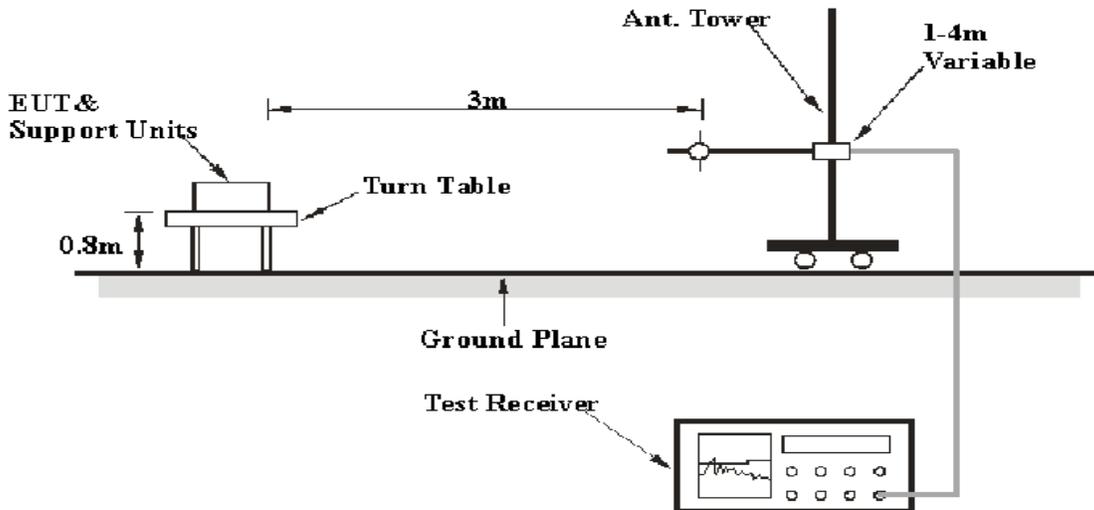

The radiated emission tests were performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part 15.109 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter of EUT was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 2 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

<i>Frequency</i>	<i>RB/W</i>	<i>VB/W</i>	<i>IF B/W</i>	<i>Detector</i>
30 MHz-1 GHz	100 kHz	300 kHz	120 kHz	Quasi-peak

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-24	2011-11-23
HP	Amplifier	HP8447E	1937A01046	2010-08-02	2011-08-02
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2010-05-04	2011-05-04

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the radiated emissions test, the adapter of EUT and the other support equipment were connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode from 30 MHz to 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15 Class B, with the worst margin reading of:

0.2 dB at 249.999250 MHz in the Horizontal polarization

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

** The testing was performed by Bruce Zhang on 2011-01-13.*

Test Mode: Operating

Auto Test(FCC 15 Class B)

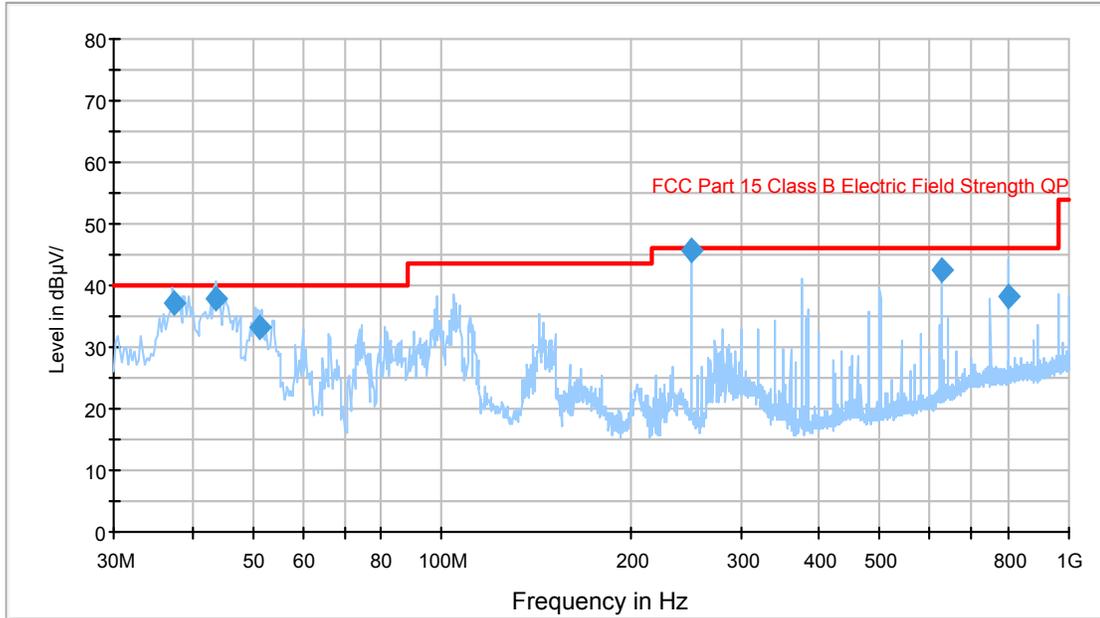

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Position (Degree)	Correction Factor (dB)	Limit (dBµV/m)	Margin (dB)
249.999250	45.8	174.0	H	266.0	-13.5	46.0	0.2*
43.779250	38.0	122.0	V	187.0	-14.4	40.0	2.0*
37.344500	37.1	101.0	V	238.0	-10.4	40.0	2.9*
625.024500	42.4	100.0	V	280.0	-5.7	46.0	3.6*
51.091000	33.4	100.0	V	161.0	-17.4	40.0	6.6
800.003750	38.2	305.0	H	206.0	-1.8	46.0	7.8

Note: *Within measurement uncertainty.

***** END OF REPORT *****