



Report No.:SZ11070007W02



# FCC PART 15C TEST REPORT

Issued to

**ZTE Corporation**

For

**GPON ONT**

Model Name: ZXHN F660  
 Trade Name: N/A  
 Brand Name: ZTE, ZTE 中兴  
 FCC ID: Q78-ZXHNF660  
 Standard: 47 CFR Part 15 Subpart C  
 Test date: September 28, 2011– October 23, 2011  
 Issue date: October 28, 2011

Shenzhen Morlab Communications Technology Co., Ltd.



Tested by Zhang Yan  
 Zhang Yan  
 Date 2011.10.28

Approved by Wei Yanquan  
 Wei Yanquan  
 Date 2011.10.28

Review by Peng Huarui  
 Peng Huarui  
 Date 2011.10.28



The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



## TABLE OF CONTENTS

<b>1.</b>	<b>GENERAL INFORMATION .....</b>	<b>4</b>
<b>1.1</b>	<b>EUT Description .....</b>	<b>4</b>
<b>1.2</b>	<b>Test Standards and Results .....</b>	<b>5</b>
<b>1.3</b>	<b>Facilities and Accreditations .....</b>	<b>6</b>
1.3.1	Facilities .....	6
1.3.2	Test Environment Conditions .....	6
<b>2.</b>	<b>47 CFR PART 15C REQUIREMENTS .....</b>	<b>7</b>
<b>2.1</b>	<b>Peak Output Power .....</b>	<b>7</b>
2.1.1	Requirement .....	7
2.1.2	Test Description .....	7
2.1.3	Test Result .....	8
<b>2.2</b>	<b>Bandwidth .....</b>	<b>9</b>
2.2.1	Definition .....	9
2.2.2	Test Description .....	9
2.2.3	Test Result .....	9
<b>2.3</b>	<b>Conducted Spurious Emissions .....</b>	<b>16</b>
2.3.1	Requirement .....	16
2.3.2	Test Description .....	16
2.3.3	Test Result .....	16
<b>2.4</b>	<b>Power spectral density (PSD) .....</b>	<b>26</b>
2.4.1	Requirement .....	26
2.4.2	Test Description .....	26
2.4.3	Test Result .....	26
<b>2.5</b>	<b>Band Edge .....</b>	<b>34</b>
2.5.1	Requirement .....	34
2.5.2	Test Description .....	34
2.5.3	Test Result .....	35
<b>2.6</b>	<b>Conducted Emission .....</b>	<b>40</b>
2.6.1	Requirement .....	40
2.6.2	Test Description .....	40



2.6.3 Test Result.....41

**2.7 Radiated Emission .....43**

2.7.1 Requirement.....43

2.7.2 Test Description .....43

2.7.3 Test Result.....45

Change History		
Issue	Date	Reason for change
1.0	Oct. 26, 2011	First edition

## 1. GENERAL INFORMATION

### 1.1 EUT Description

EUT Type .....	GPON ONT
Serial No.....	(n.a, marked #1 by test site)
IMEI .....	(n.a)
Hardware Version .....	V2.0
Software Version .....	V2.20.20
Modulation Type.....	DSSS, OFDM
Frequency .....	802.11b/g/n-20MHz: 2.412GHz - 2.462GHz 802.11n-40MHz: 2.422GHz - 2.452GHz

*Note 1:* The EUT is a GPON ONT. It supports 802.11b, 802.11g and 802.11n (HT20/40), and they are all tested in this report.

*Note 2:* The EUT is capable of MIMO operation, it supports two transmit chains, one transmit chain supports 802.11b, 802.11g and 802.11n and the another supports 802.11g and 802.11n only, and both of them were tested in this report. For the test of 802.11b mode, only the transmit chain supports 802.11b was tested.

*Note 3:* The frequencies allocated is  $F(\text{MHz})=2412+5*(n-1)$  ( $1 \leq n \leq 11$ ). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz) and 11 (2462MHz).

*Note 4:* The frequencies of the 802.11n-40MHz allocated is  $F(\text{MHz})=2412+5*(n-1)$  ( $3 \leq n \leq 9$ ). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 3 (2422MHz), 6 (2437MHz) and 9 (2452MHz).

*Note 5:* For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

## 1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Wi-Fi, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-09 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.247(a)	Number of Hopping Frequency	(n.a)
2	15.247(b)	Peak Output Power	PASS
3	15.247(a)	Bandwidth	PASS
4	15.247(a)	Carrier Frequency Separation	(n.a)
5	15.247(a)	Time of Occupancy (Dwell time)	(n.a)
6	15.247(c)	Conducted Spurious Emission	PASS
7	15.247(c)	Band Edge	PASS
8	15.207	Conducted Emission	PASS
9	15.209 15.247(c)	Radiated Emission	PASS
10	15.247(d)	Power spectral density (PSD)	PASS

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.4 2009.



### **1.3 Facilities and Accreditations**

#### **1.3.1 Facilities**

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at 3/F, Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

#### **1.3.2 Test Environment Conditions**

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	20 - 25
Relative Humidity (%):	40 - 60
Atmospheric Pressure (kPa):	96

## 2. 47 CFR PART 15C REQUIREMENTS

### 2.1 Peak Output Power


#### 2.1.1 Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902–928 MHz, 2400–2483.5MHz, and 5725–5850 MHz bands: 1 Watt.

#### 2.1.2 Test Description

The measured output power was calculated by the reading of the Power Meter and calibration.

##### A. Test Setup:



The EUT which is powered by AC adapter, is coupled to the Power Meter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Note: The data include simultaneous transmission using MIMO mode for 802.11n.

##### B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EPM Series Power Meter	Agilent	E4418B	GB43318055	2011.05	1year

### 2.1.3 Test Result

The EUT operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

#### 2.1.3.1 802.11b Test mode

CH	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		Chain1				
		dBm	W	dBm	W	
1	2412	11.08	0.013	30	1	PASS
6	2437	11.19	0.013			PASS
11	2462	11.79	0.015			PASS

#### 2.1.3.2 802.11g Test mode

CH	Frequency (MHz)	Measured Output Peak Power				Limit		Verdict
		Chain1		Chain2				
		dBm	W	dBm	W	dBm	W	
1	2412	9.07	0.008	8.11	0.006	30	1	PASS
6	2437	9.13	0.008	8.42	0.007			PASS
11	2462	8.38	0.007	7.69	0.006			PASS

#### 2.1.3.3 802.11n-20MHz Test mode

CH	Frequency (MHz)	Measured Output Peak Power						Limit		Verdict
		Chain1		Chain2		Total power				
		dBm	W	dBm	W	dBm	W	dBm	W	
1	2412	12.86	0.019	11.54	0.014	15.19	0.033	30	1	PASS
6	2437	12.24	0.017	11.26	0.013	14.77	0.03			PASS
11	2462	12.14	0.016	12.47	0.018	15.31	0.034			PASS

Note: Total Power= Chain1 level+ Chain2 level (Liner)

#### 2.1.3.4 802.11n-40MHz Test mode

CH	Frequency (MHz)	Measured Output Peak Power						Limit		Verdict
		Chain1		Chain2		Total power				
		dBm	W	dBm	W	dBm	W	dBm	W	
3	2422	12.36	0.017	11.39	0.014	14.91	0.031	30	1	PASS
6	2437	12.29	0.017	11.96	0.016	15.19	0.033			PASS
9	2452	12.14	0.016	11.75	0.015	14.91	0.031			PASS

Note: Total Power= Chain1 level+ Chain2 level (Liner)


## 2.2 Bandwidth

### 2.2.1 Definition

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.2.2 Test Description

#### A. Test Set:

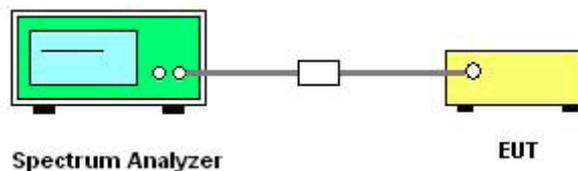

The EUT which is powered by the AC adapter, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

#### B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2011.05	1year

### 2.2.3 Test Result


The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the Module.

#### 2.2.3.1 802.11b Test mode


#### A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits(kHz)	Result
		Chain1			
1	2412	7.6	Plot A	$\geq 500$	PASS
6	2437	7.8	Plot B	$\geq 500$	PASS
11	2462	7.8	Plot C	$\geq 500$	PASS


#### B. Test Plots:

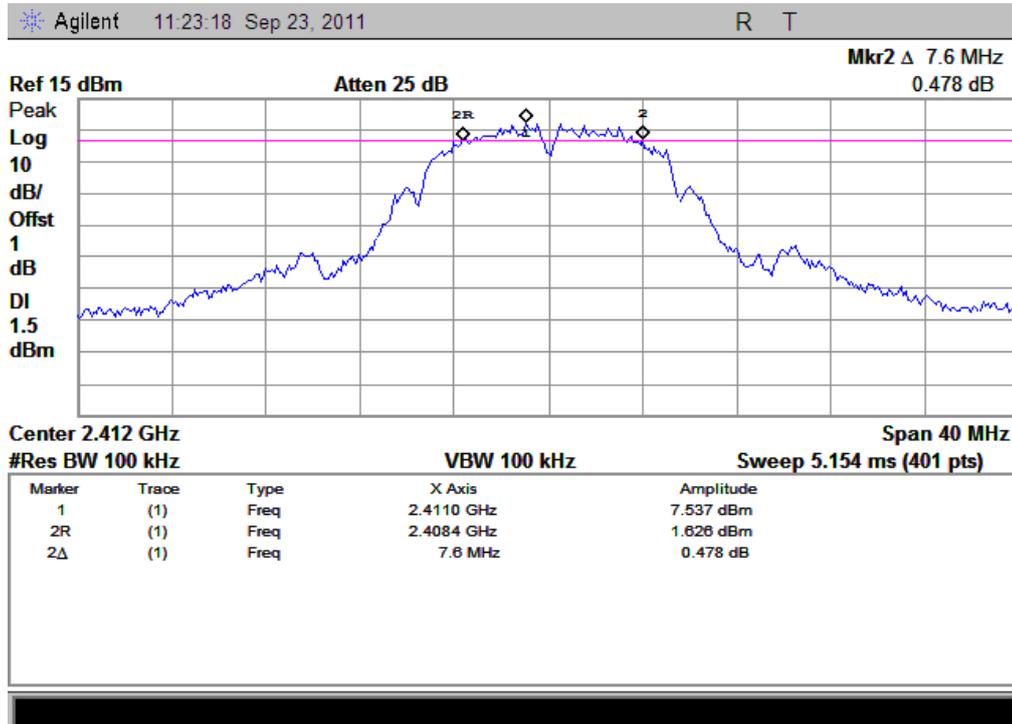

(Plot A: 2412MHz)

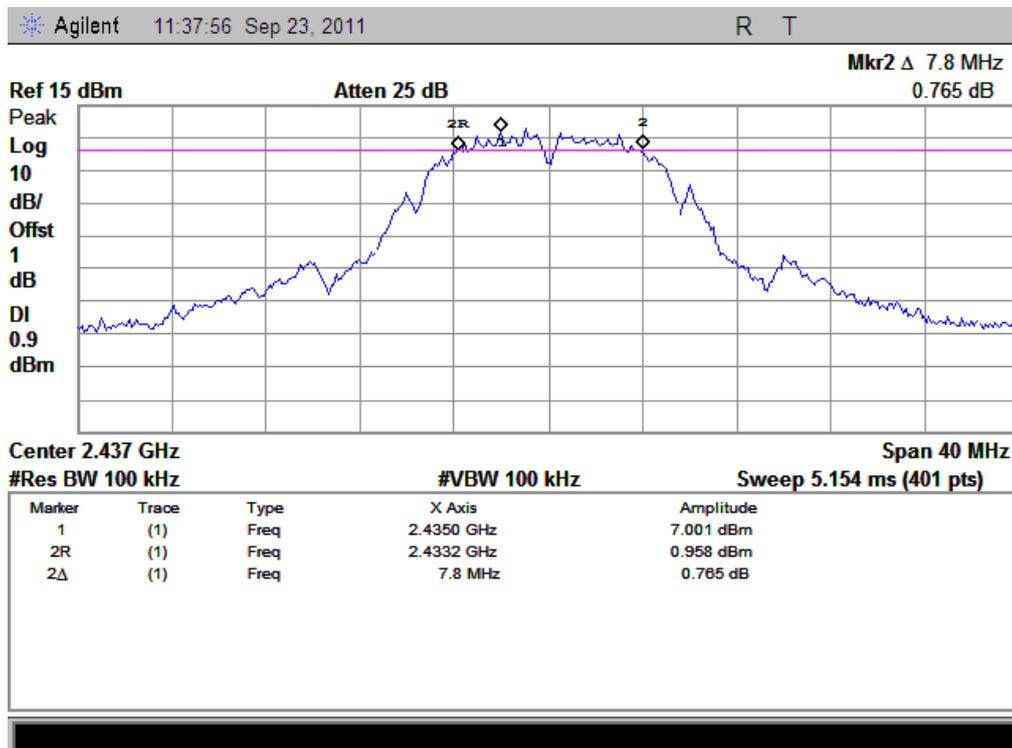

(Plot B: Channel 6: 2437 MHz)

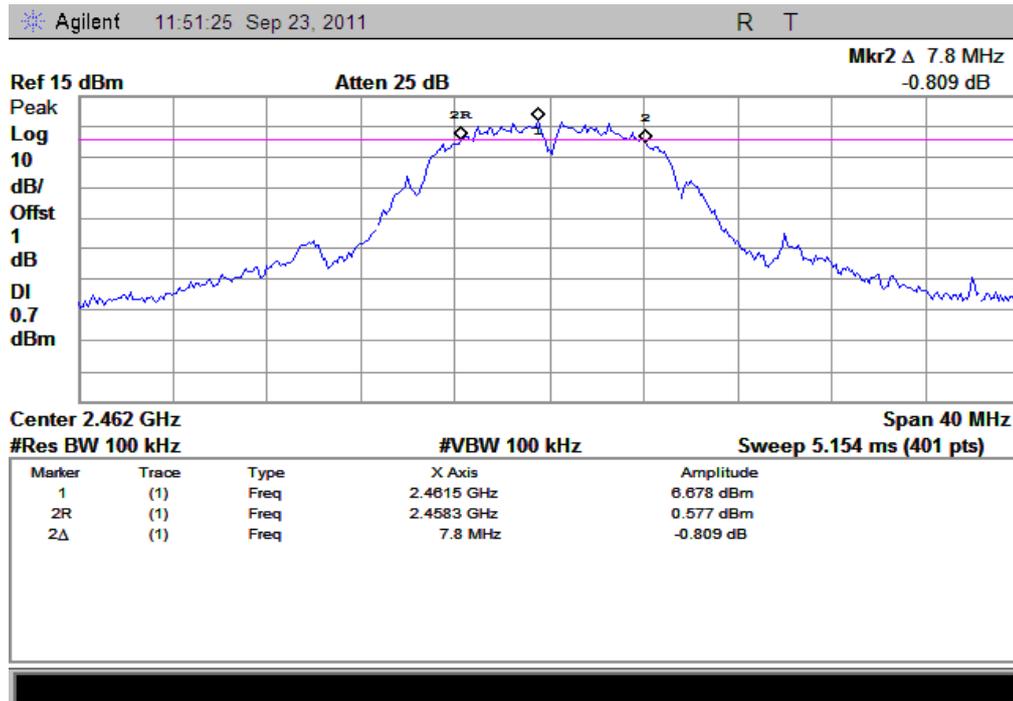


(Plot C: Channel 11: 2462MHz)

### 2.2.3.2 802.11g Test mode


#### A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Refer to Plot	Limits(kHz)	Result
		Chain1	Chain2			
1	2412	15.4	15.5	Plot A/B	≥500	PASS
6	2437	15.7	15.8	Plot C/D	≥500	PASS
11	2462	15.5	15.4	Plot E/F	≥500	PASS


#### B. Test Plots:

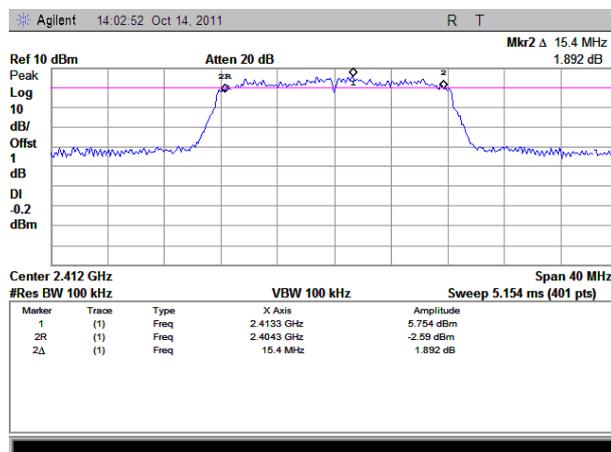


(Plot A: Chain1\_Channel 1: 2412MHz)

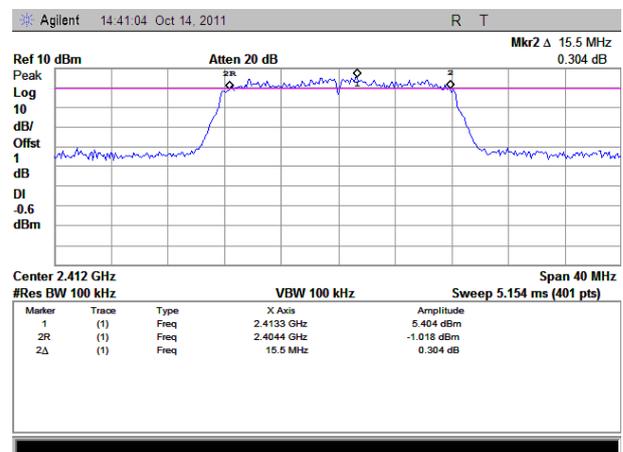


(Plot B: Chain2\_Channel 1: 2412MHz)

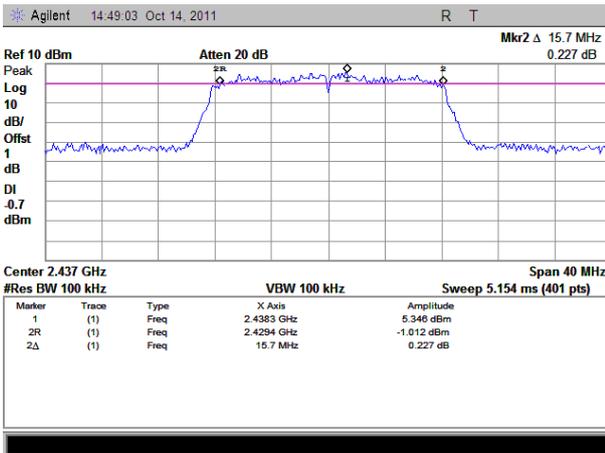


(Plot C: Chain1\_Channel 6: 2437 MHz)

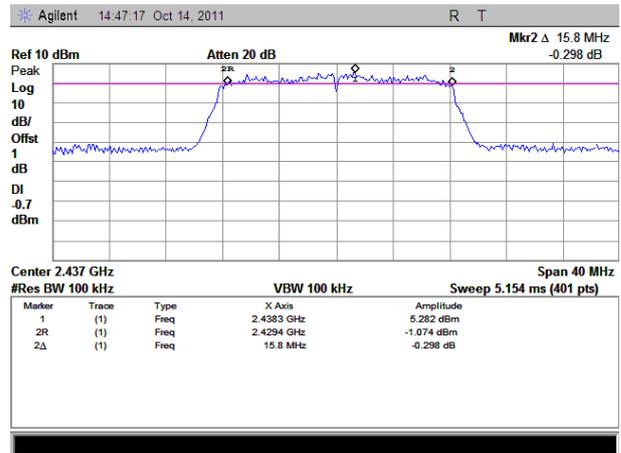

(Plot D: Chain2\_Channel 6: 2437 MHz)

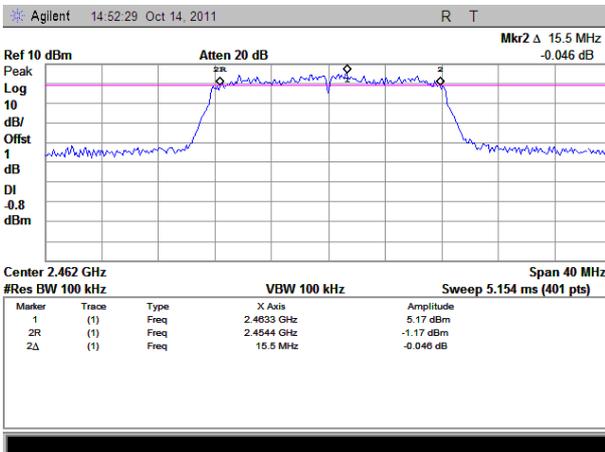

(Plot E: Chain1\_Channel 11: 2462MHz)

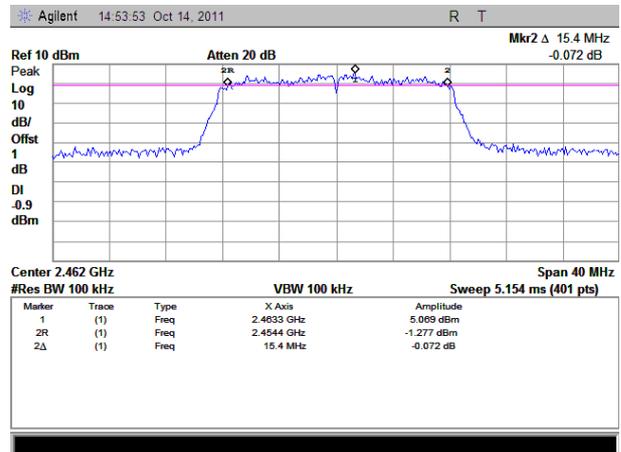


(Plot F: Chain2\_Channel 11: 2462MHz)

### 2.2.3.3 802.11n-20MHz Test mode


#### A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Refer to Plot	Limits(kHz)	Result
		Chain1	Chain2			
1	2412	17.3	17.2	Plot A/B	$\geq 500$	PASS
6	2437	17.5	17.5	Plot C/D	$\geq 500$	PASS
11	2462	17.2	17.6	Plot E/F	$\geq 500$	PASS


#### B. Test Plot:

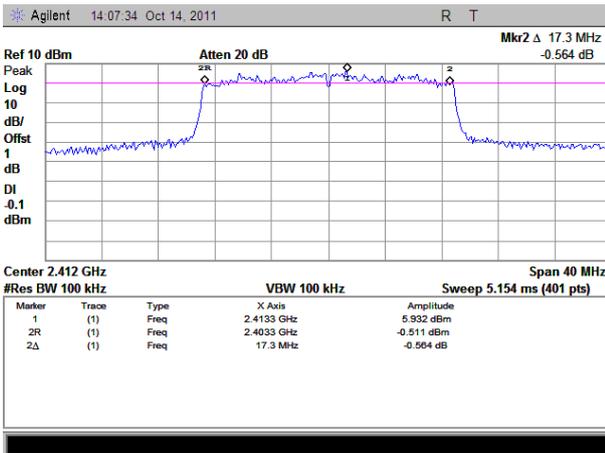


(Plot A: Chain1\_Channel 1: 2412MHz)

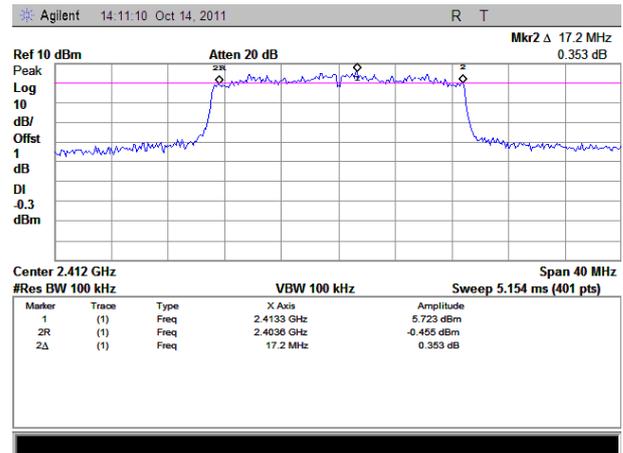


(Plot B: Chain2\_Channel 1: 2412MHz)

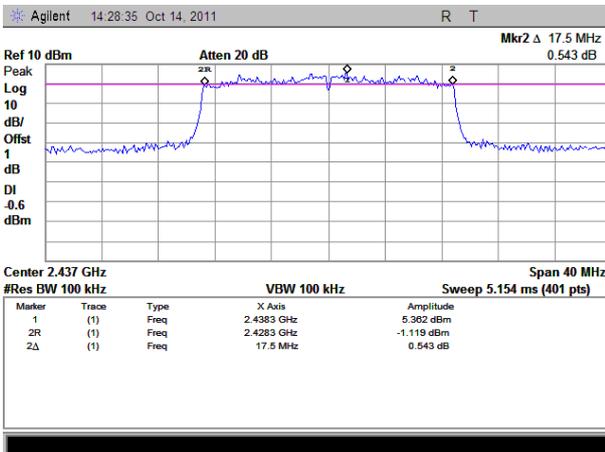


(Plot C: Chain1\_Channel 6: 2437 MHz)

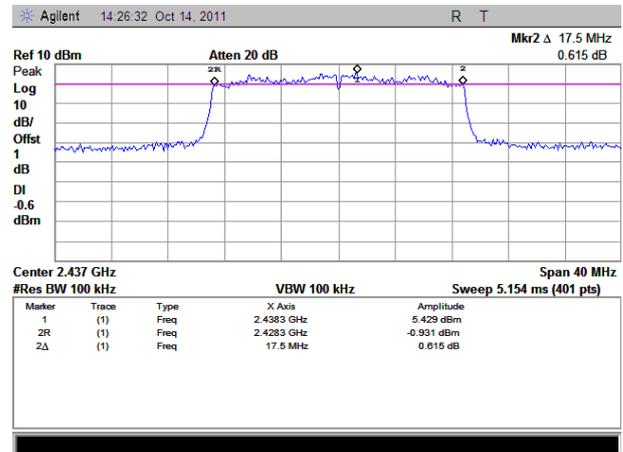

(Plot D: Chain2\_Channel 6: 2437 MHz)

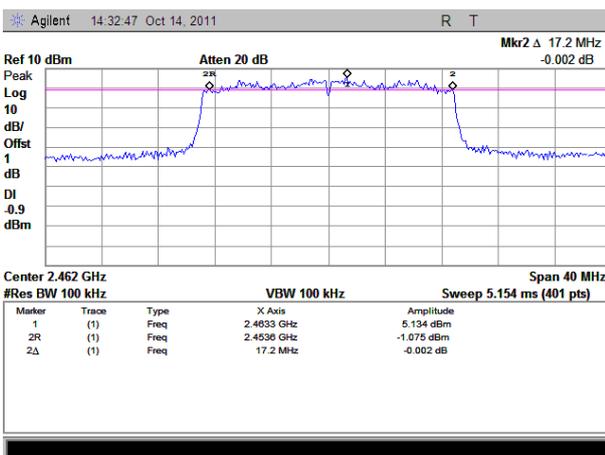

(Plot E: Chain1\_Channel 11: 2462MHz)

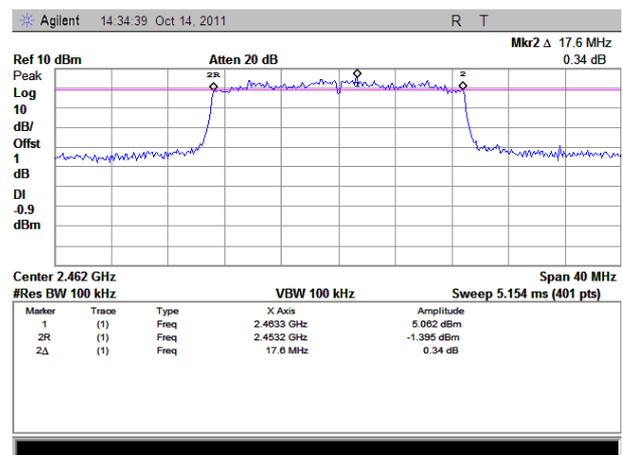


(Plot F: Chain2\_Channel 11: 2462MHz)

### 2.2.3.4 802.11gn-40MHz Test mode


#### A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Refer to Plot	Limits(kHz)	Result
		Chain1	Chain2			
3	2422	37.2	36.3	Plot A/B	$\geq 500$	PASS
6	2437	35.7	35.6	Plot C/D	$\geq 500$	PASS
9	2452	35.5	36.2	Plot E/F	$\geq 500$	PASS


#### B. Test Plots:

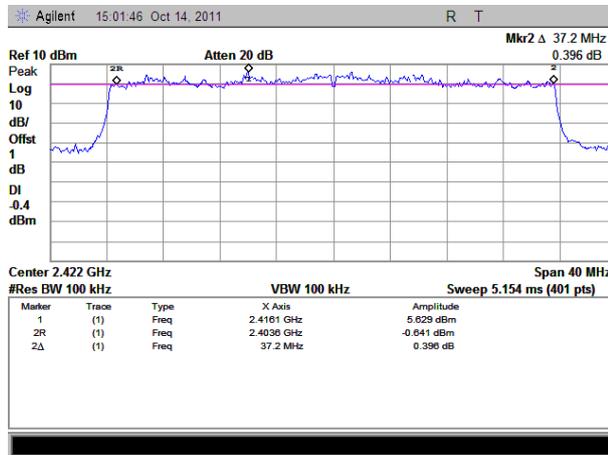


(Plot A: Chain1\_Channel 3: 2422MHz)

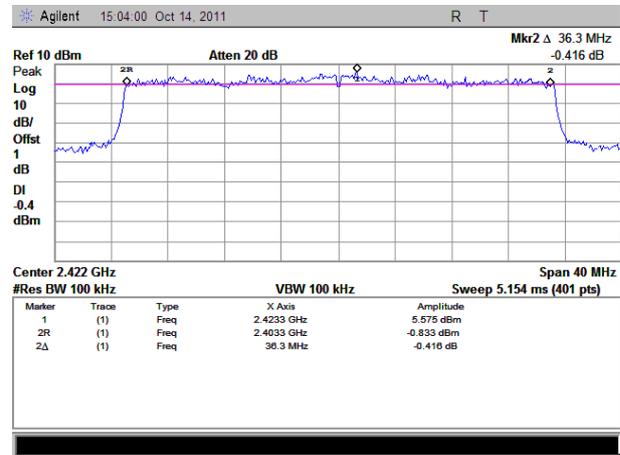


(Plot B: Chain2\_Channel 3: 2422MHz)

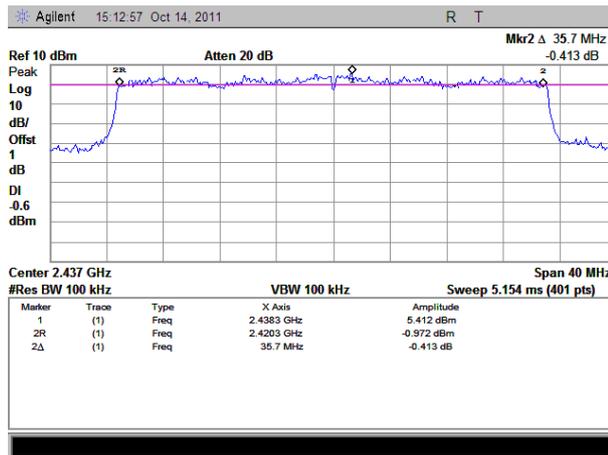


(Plot C: Chain1\_Channel 6: 2437 MHz)

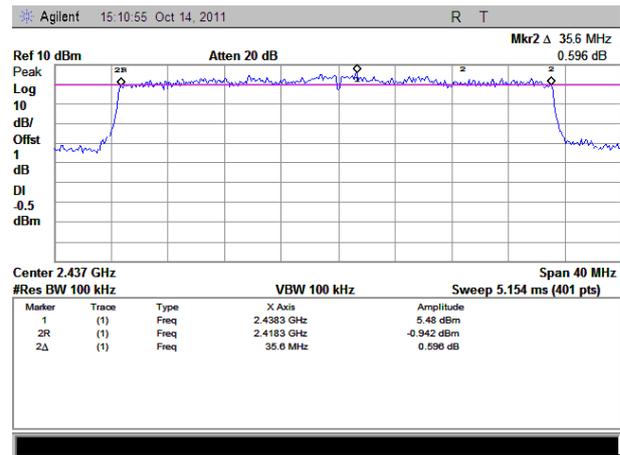

(Plot D: Chain2\_Channel 6: 2437 MHz)

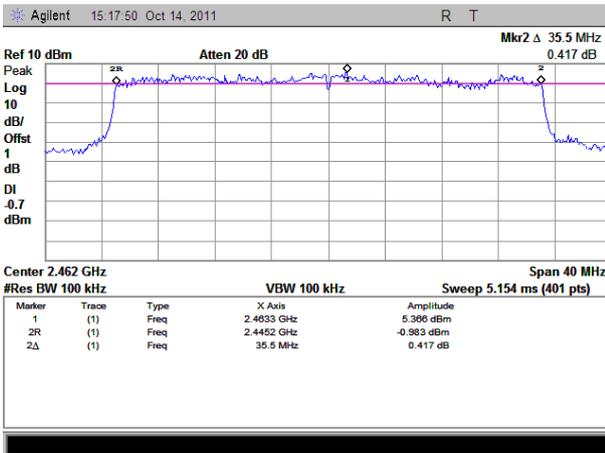

(Plot E: Chain1\_Channel 9: 2462MHz)

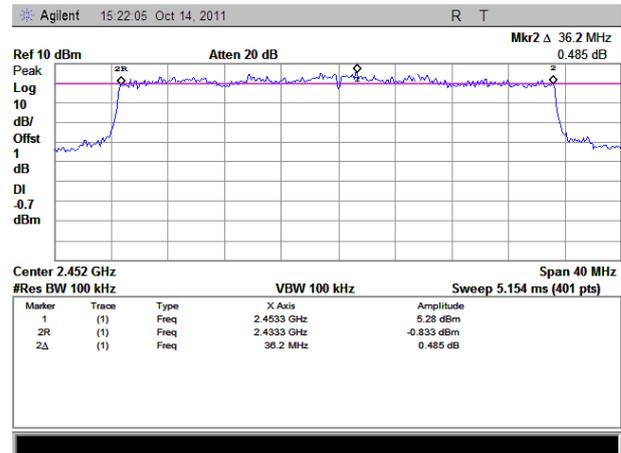

(Plot F: Chain2\_Channel 9: 2462MHz)

## 2.3 Conducted Spurious Emissions

### 2.3.1 Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.3.2 Test Description

See section 2.2.2 of this report.

### 2.3.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

#### 2.3.3.1 802.11b Test mode

#### A. Test Verdict:


##### Chain1:

Channel	Frequency (MHz)	Measured Out of Band Emission (dBm)	Max. Band Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
1	2412	-48.88	Plot A.1/A.2	5.75	-14.2	PASS
6	2437	-48.48	Plot B.1/B.2	5.352	-14.6	PASS
11	2462	-48.75	Plot C.1/C.2	5.007	-15.0	PASS


**B. Test Plots:**

Note: the power of the Module transmitting frequency should be ignored.


**Chain1:**

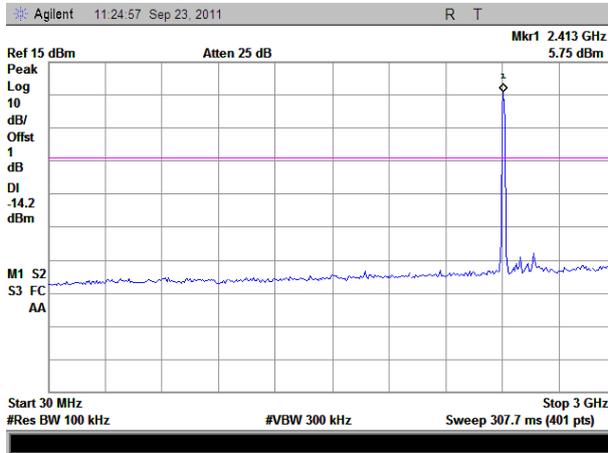


(Plot A.1: Channel = 1, 30MHz to 3GHz)

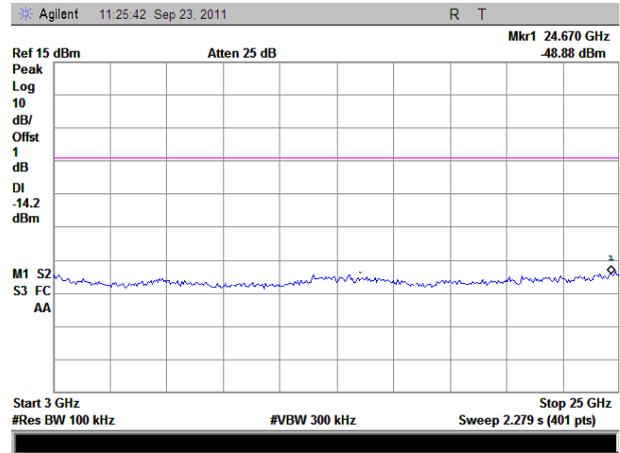


(Plot A.2: Channel = 1, 3GHz to 25GHz)

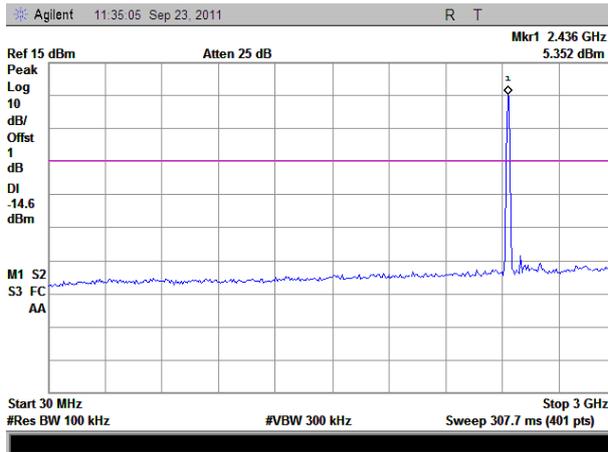


(Plot B.1: Channel = 6, 30MHz to 3GHz)

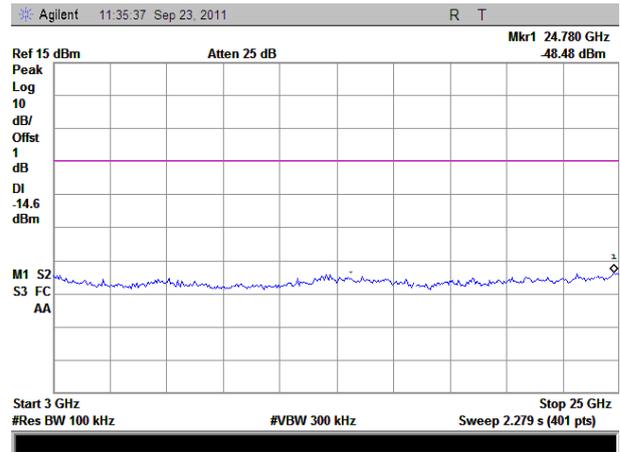

(Plot B.2: Channel = 6, 3GHz to 25GHz)

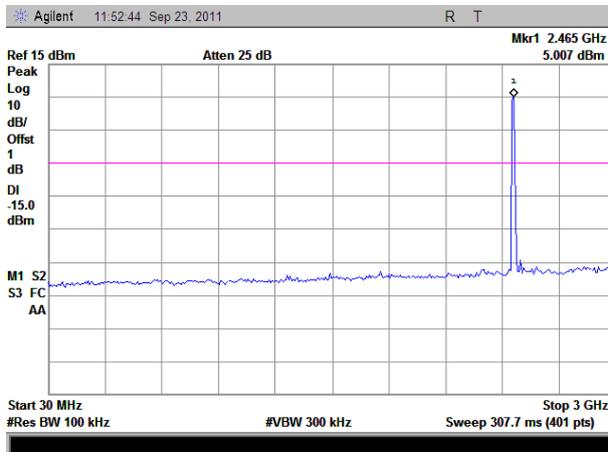

(Plot C.1: Channel = 11, 30MHz to 3GHz)

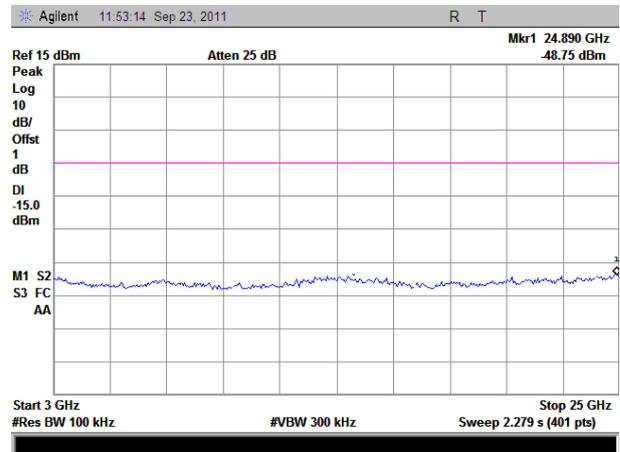

(Plot C.2: Channel = 11, 3GHz to 25GHz)

### 2.3.3.2 802.11g Test mode

#### A. Test Verdict:

##### Chain1:

Channel	Frequency (MHz)	Measured Out of Band Emission (dBm)	Max. Band Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
1	2412	-48.76	Plot A.1/A.2	6.615	-13.4	PASS
6	2437	-48.46	Plot B.1/B.2	7.603	-12.4	PASS
11	2462	-48.18	Plot C.1/C.2	6.705	-13.3	PASS


##### Chain2:

Channel	Frequency (MHz)	Measured Out of Band Emission (dBm)	Max. Band Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
1	2412	-48.96	Plot D.1/D.2	5.306	-14.7	PASS
6	2437	-48.07	Plot E.1/E.2	5.566	-14.4	PASS
11	2462	-48.83	Plot F.1/F.2	5.471	-14.5	PASS

#### B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

##### Chain1:

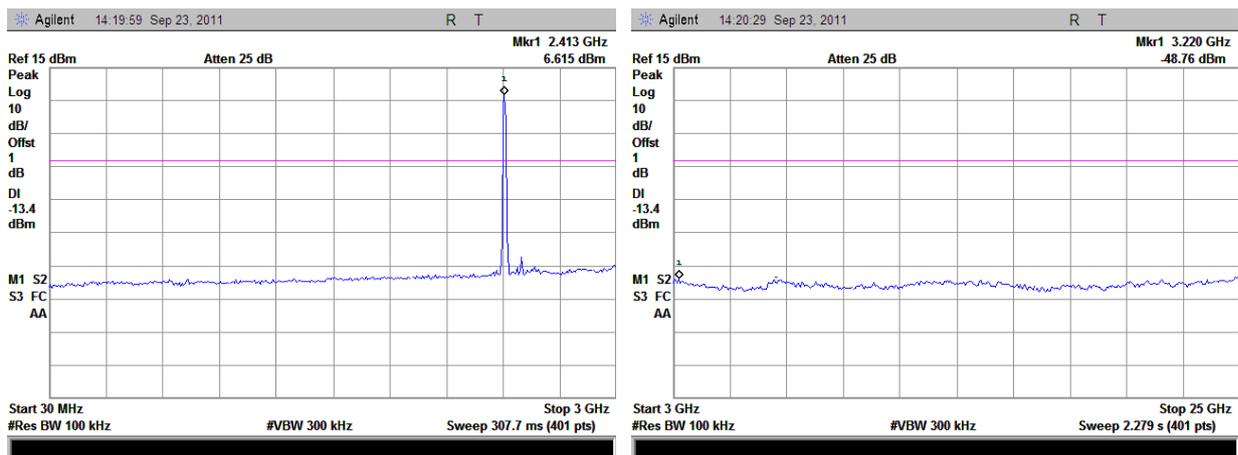


(Plot A.1: Channel = 1, 30MHz to 3GHz)


(Plot A.2: Channel = 1, 3GHz to 25GHz)

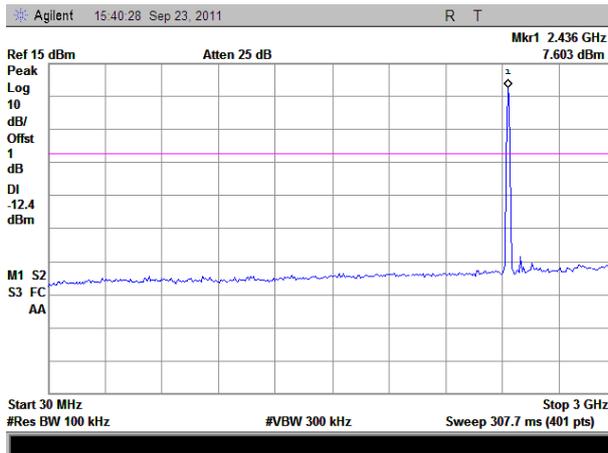


(Plot B.1: Channel = 6, 30MHz to 3GHz)

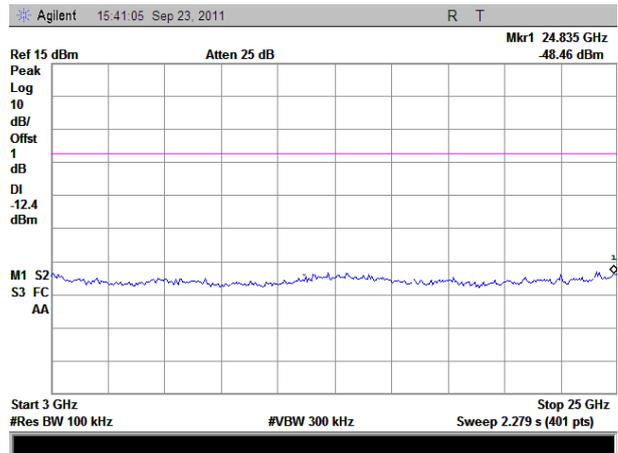

(Plot B.2: Channel = 6, 3GHz to 25GHz)

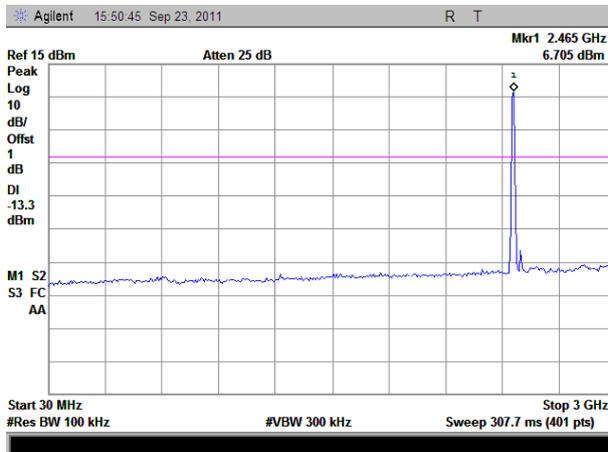


(Plot C.1: Channel = 11, 30MHz to 3GHz)

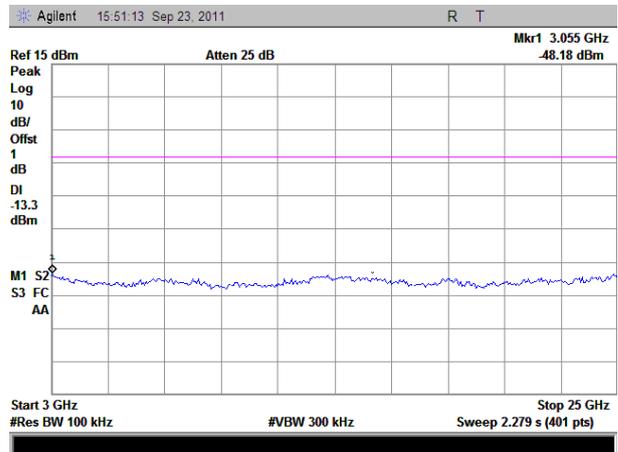


(Plot C.2: Channel = 11, 3GHz to 25GHz)


**Chain2:**

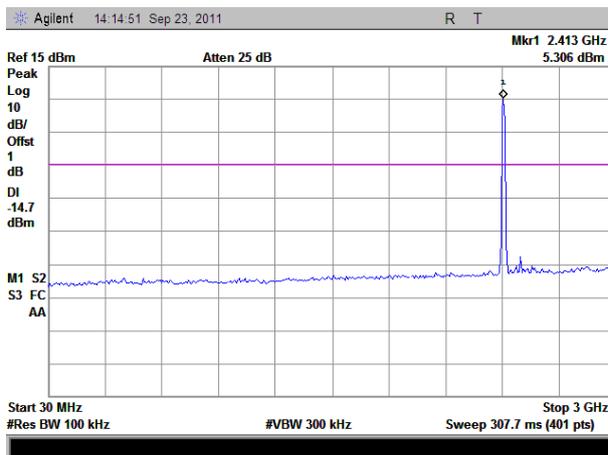


(Plot D.1: Channel = 1, 30MHz to 3GHz)

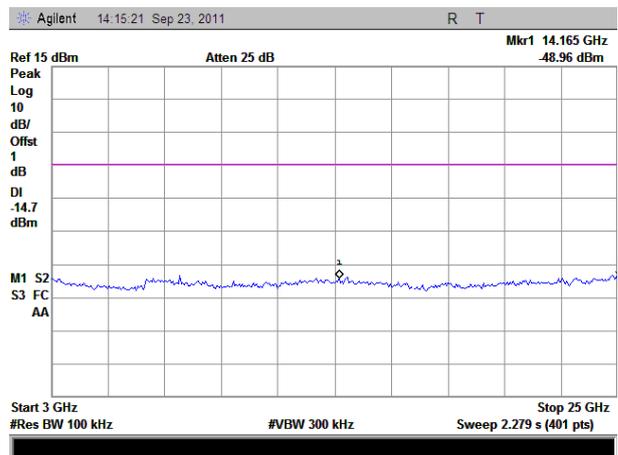


(Plot D.2: Channel = 1, 3GHz to 25GHz)

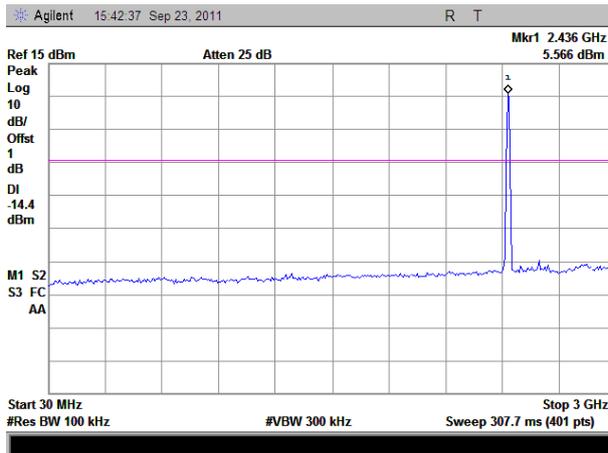


(Plot E.1: Channel = 6, 30MHz to 3GHz)

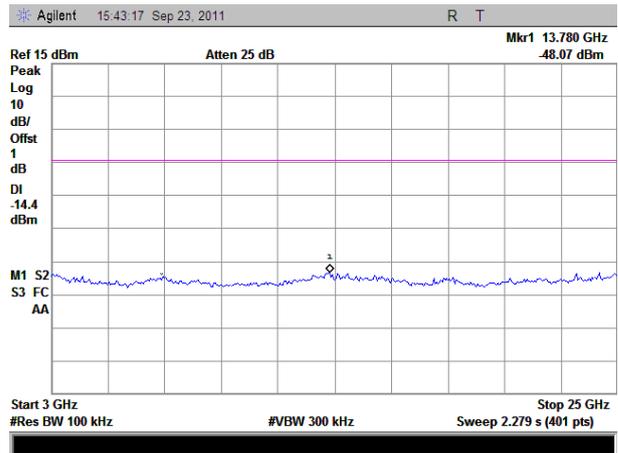

(Plot E.2: Channel = 6, 3GHz to 25GHz)

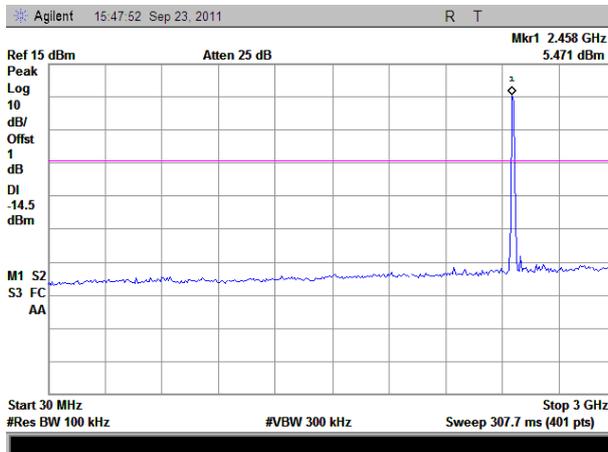

(Plot F.1: Channel = 11, 30MHz to 3GHz)

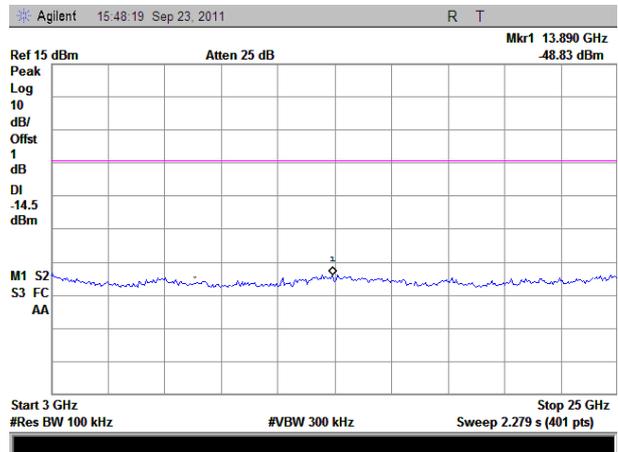

(Plot F.2: Channel = 11, 3GHz to 25GHz)

### 2.3.3.3 802.11n-20MHz Test mode

#### A. Test Verdict:

##### Chain1:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
1	2412	-48.48	Plot A.1/A.2	7.09	-12.9	PASS
6	2437	-48.67	Plot B.1/B.2	6.491	-13.5	PASS
11	2462	-49.32	Plot C.1/C.2	6.362	-13.6	PASS


**Chain2:**

Channel	Frequency (MHz)	Measured Out of Band Emission (dBm)	Max. Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
1	2412	-48.86	Plot D.1/D.2	5.114	-14.9	PASS
6	2437	-48.35	Plot E.1/E.2	5.671	-14.3	PASS
11	2462	-49.32	Plot F.1/F.2	6.257	-13.7	PASS


**B. Test Plots:**

Note: the power of the Module transmitting frequency should be ignored.


**Chain1:**

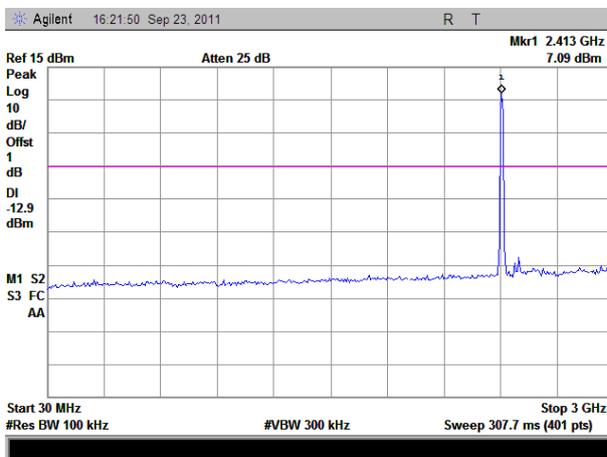


(Plot A.1: Channel = 1, 30MHz to 3GHz)

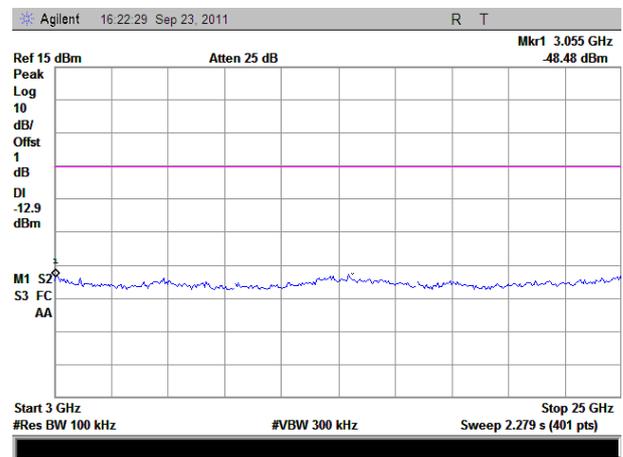


(Plot A.2: Channel = 1, 3GHz to 25GHz)

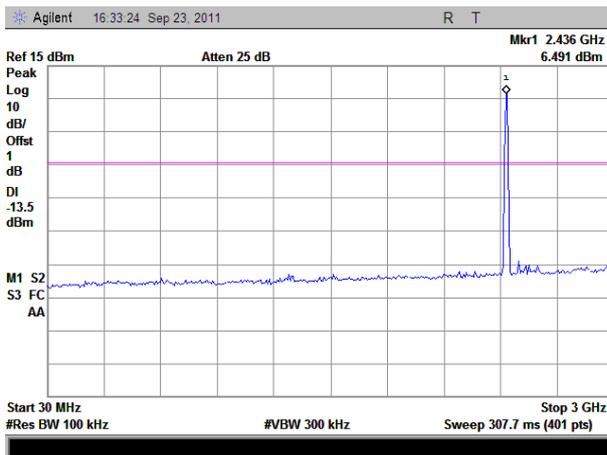


(Plot B.1: Channel = 6, 30MHz to 3GHz)

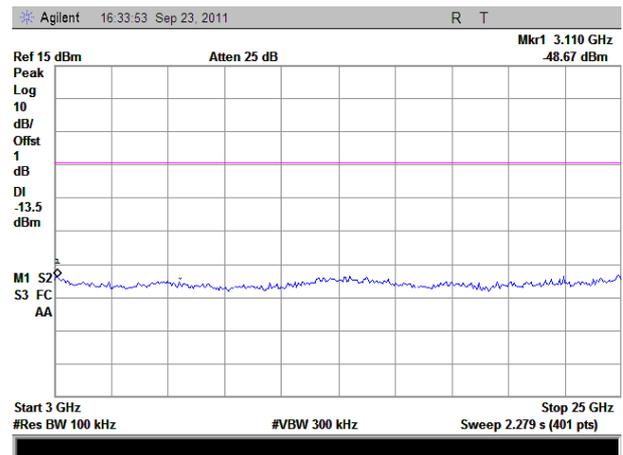

(Plot B.2: Channel = 6, 3GHz to 25GHz)

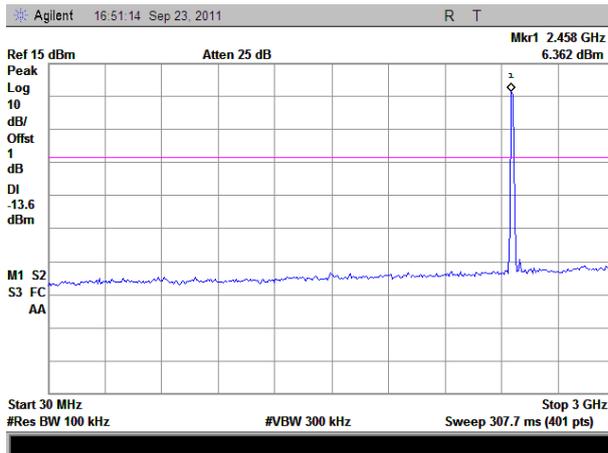


(Plot C.1: Channel = 11, 30MHz to 3GHz)

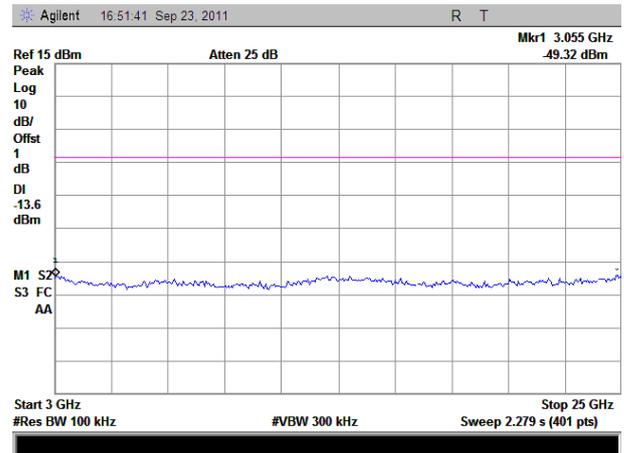


(Plot C.2: Channel = 11, 3GHz to 25GHz)


**Chain2:**

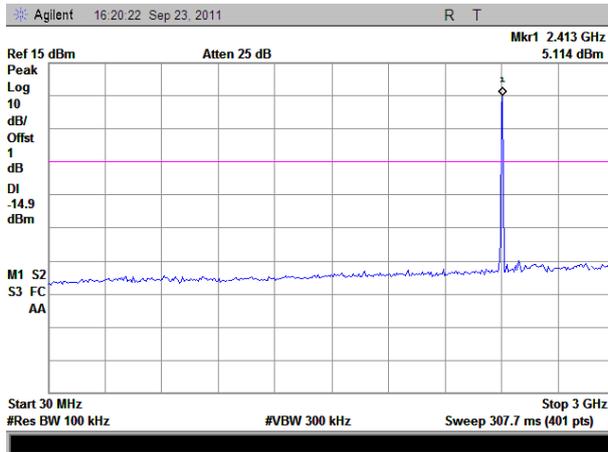


(Plot D.1: Channel = 1, 30MHz to 3GHz)

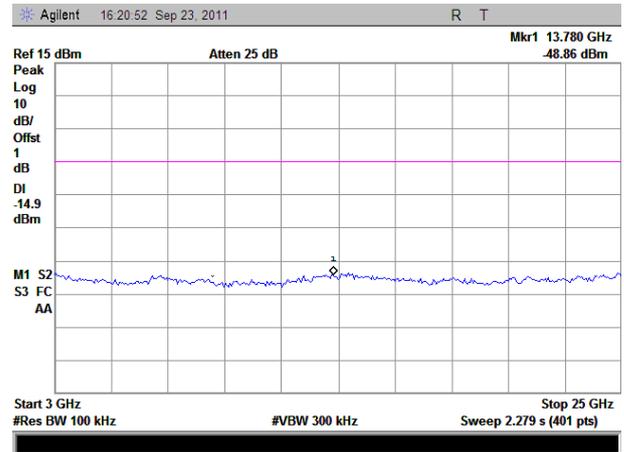


(Plot D.2: Channel = 1, 3GHz to 25GHz)

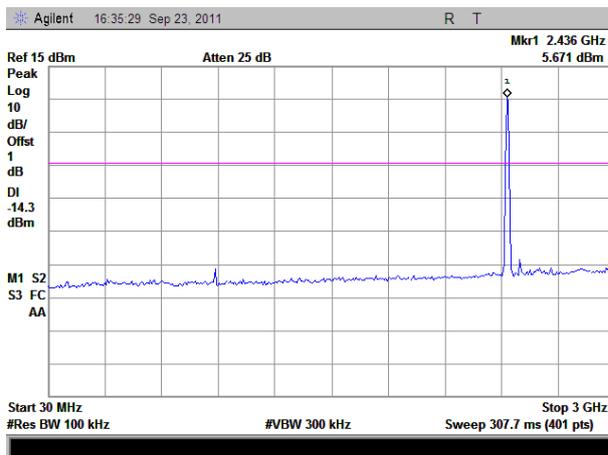


(Plot E.1: Channel = 6, 30MHz to 3GHz)

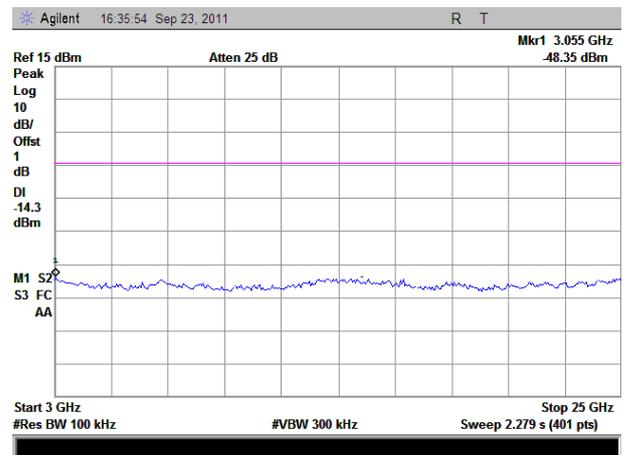

(Plot E.2: Channel = 6, 3GHz to 25GHz)

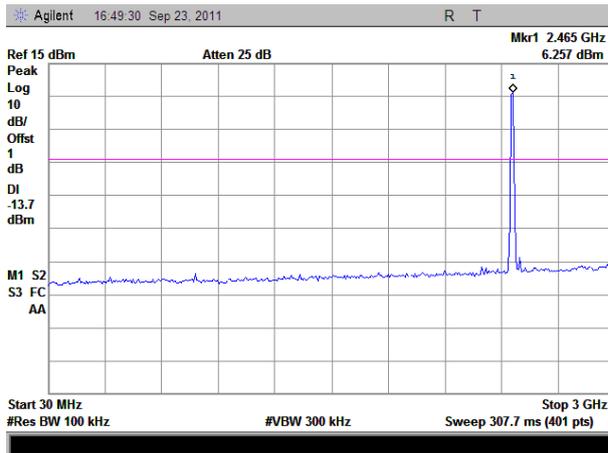

(Plot F.1: Channel = 11, 30MHz to 3GHz)

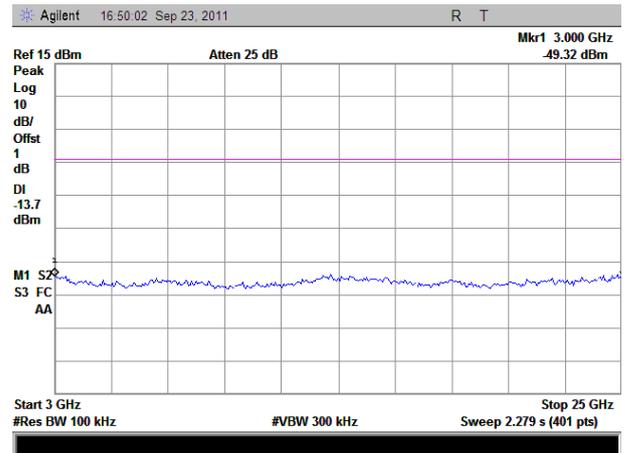

(Plot F.2: Channel = 11, 3GHz to 25GHz)

### 2.3.3.4 802.11n-40MHz Test mode

#### A. Test Verdict:

##### Chain1:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
3	2422	-49.28	Plot A.1/A.2	6.739	-13.3	PASS
6	2437	-48.67	Plot B.1/B.2	6.89	-13.1	PASS
9	2452	-48.59	Plot C.1/C.2	6.501	-13.5	PASS


##### Chain2:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
3	2422	-49.29	Plot D.1/D.2	6.034	-14.0	PASS
6	2437	-48.94	Plot E.1/E.2	6.821	-13.2	PASS
9	2452	-49.01	Plot F.1/F.2	5.76	-14.2	PASS


#### B. Test Plot:

Note: the power of the Module transmitting frequency should be ignored.


**Chain1:**

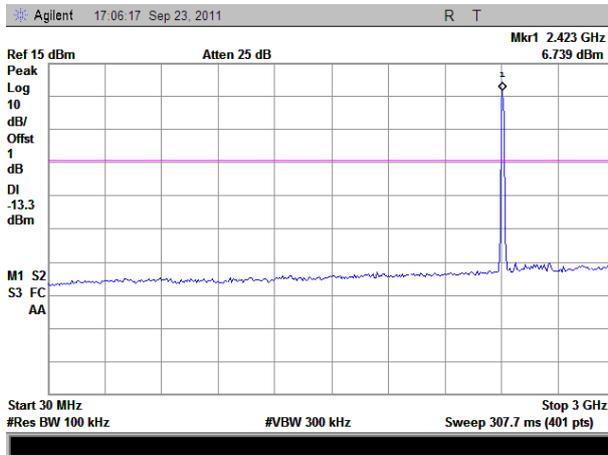


(Plot A.1: Channel = 3, 30MHz to 3GHz)

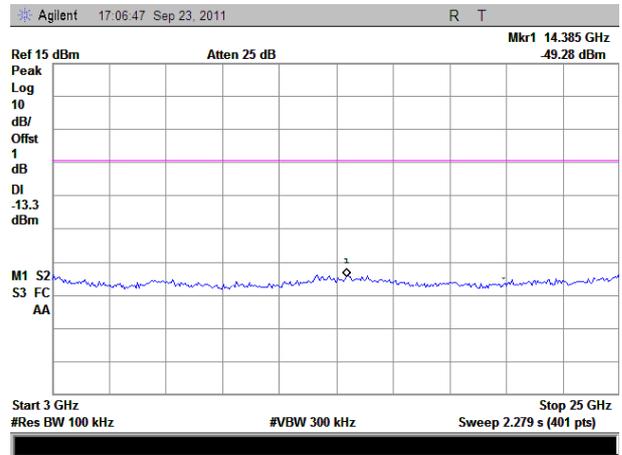


(Plot A.2: Channel = 3, 3GHz to 25GHz)

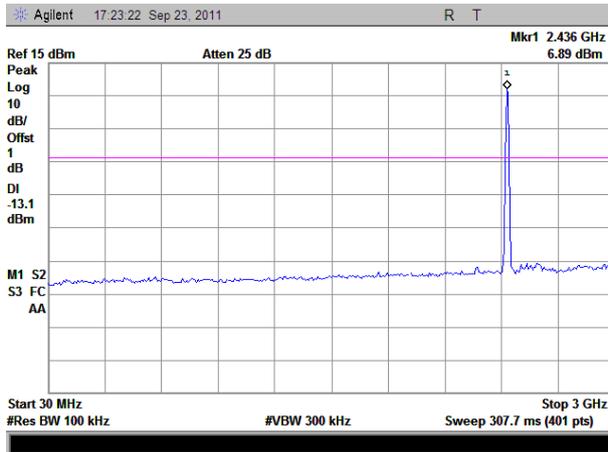


(Plot B.1: Channel = 6, 30MHz to 3GHz)

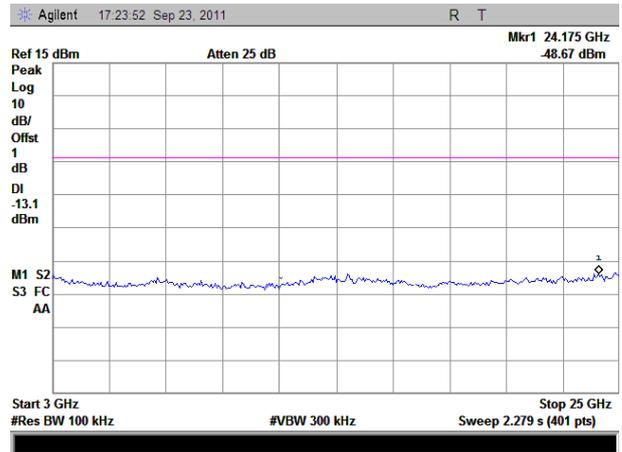

(Plot B.2: Channel = 6, 3GHz to 25GHz)

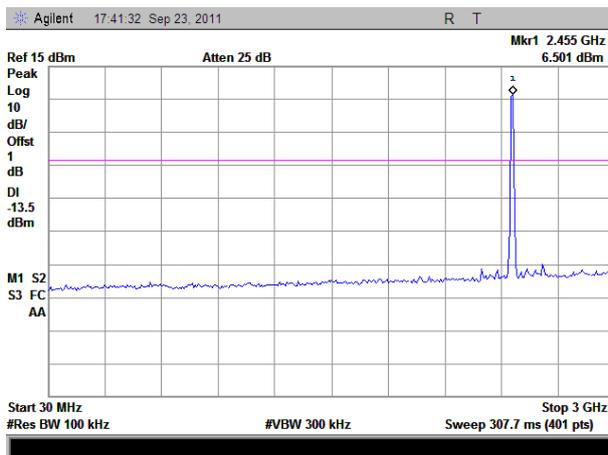


(Plot C.1: Channel = 9, 30MHz to 3GHz)

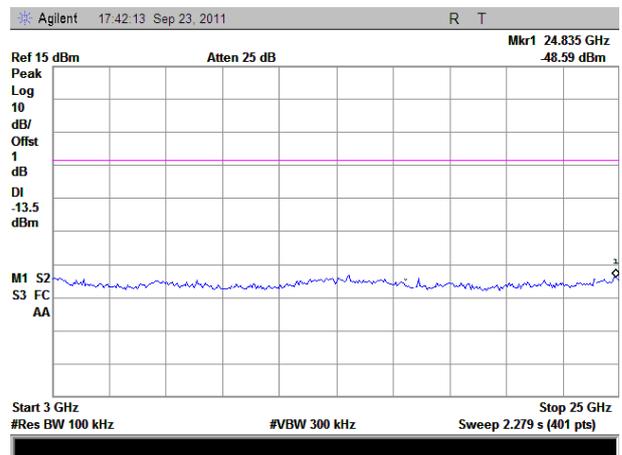


(Plot C.2: Channel = 9, 3GHz to 25GHz)


**Chain2:**

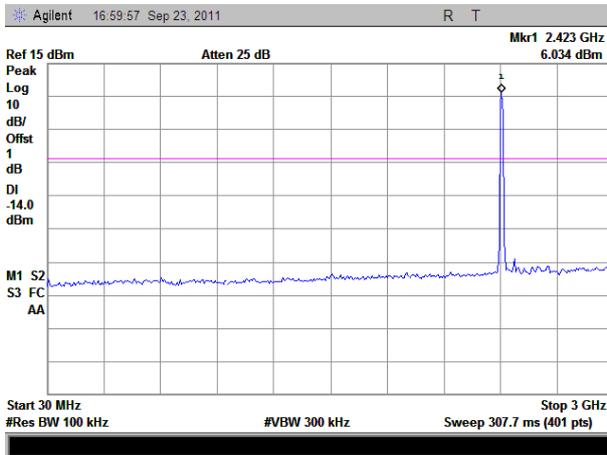


(Plot D.1: Channel = 3, 30MHz to 3GHz)

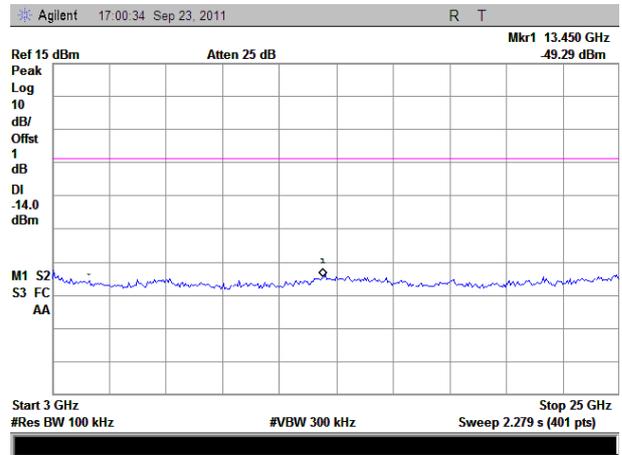


(Plot D.2: Channel = 3, 3GHz to 25GHz)

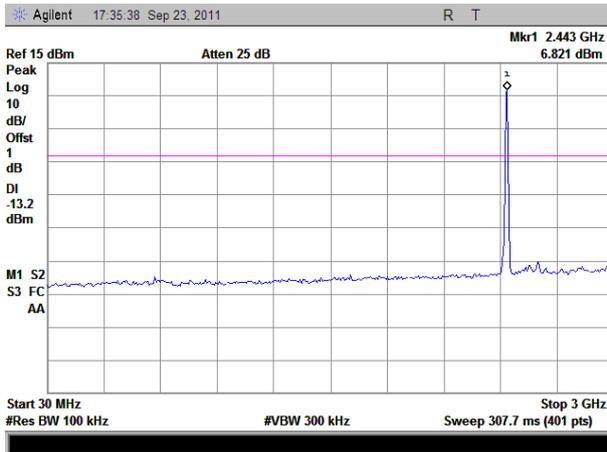


(Plot E.1: Channel = 6, 30MHz to 3GHz)

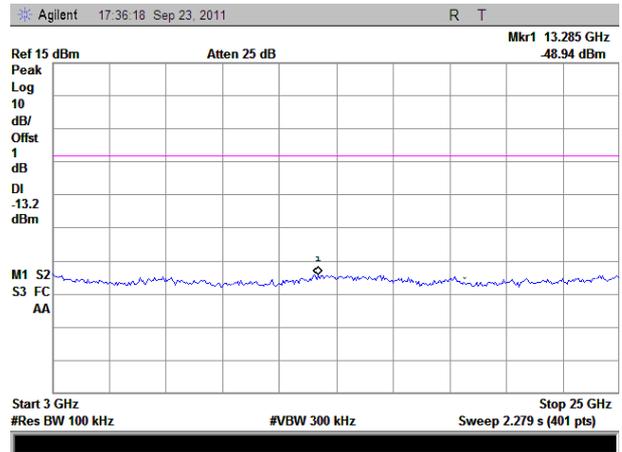

(Plot E.2: Channel = 6, 3GHz to 25GHz)

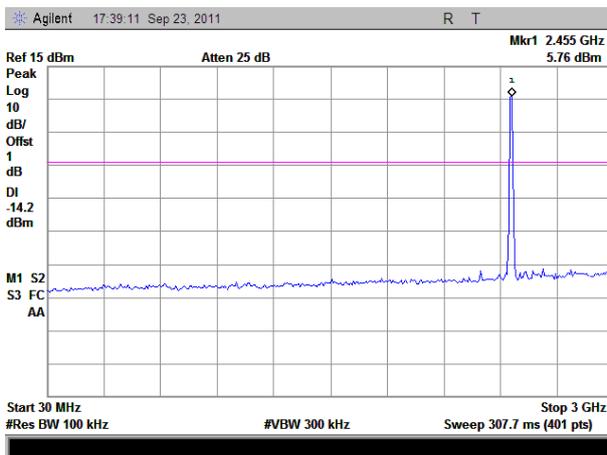

(Plot F.1: Channel = 9, 30MHz to 3GHz)

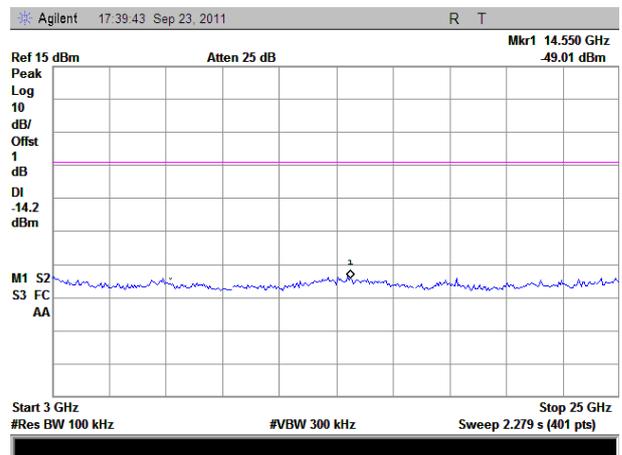

(Plot F.2: Channel = 9, 3GHz to 25GHz)

## 2.4 Power spectral density (PSD)

### 2.4.1 Requirement

According to FCC section 15.247(d), the same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

### 2.4.2 Test Description

See section 2.2.2 of this report.

### 2.4.3 Test Result

The lowest, middle and highest channels are tested to verify the band edge emissions.


Note: The data include simultaneous transmission using MIMO mode for 802.11n.

#### 2.4.3.1 802.11b Test mode


#### A. Test Verdict:

Spectral power density (dBm/MHz)					
Channel: 1 Frequency, 2412MHz		Channel: 6 Frequency, 2437MHz		Channel: 11 Frequency, 2462MHz	
Test Result	Test plot	Test Result	Test plot	Test Result	Test plot
-7.057	Plot A	-7.919	Plot B	-7.636	Plot C
Measurement uncertainty: $\pm 1.3\text{dB}$					


**B. Test Plots:**

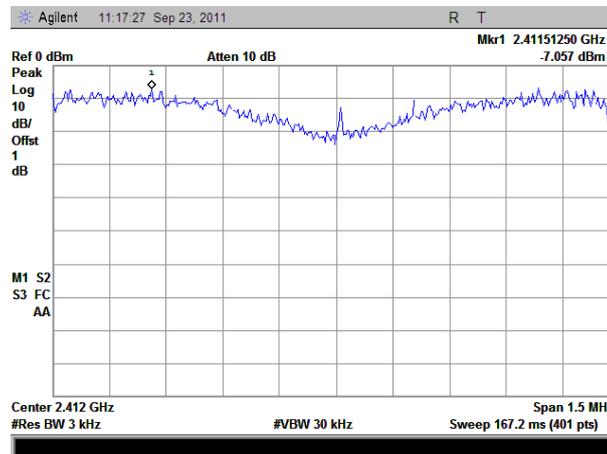

(Plot A: Chain1\_Channel = 1)

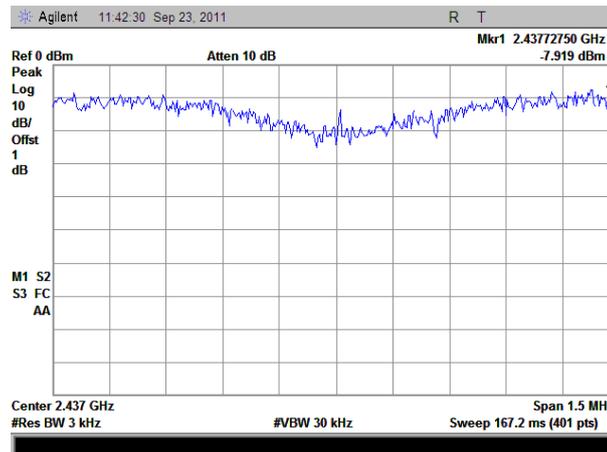

(Plot B: Chain1\_Channel = 6)

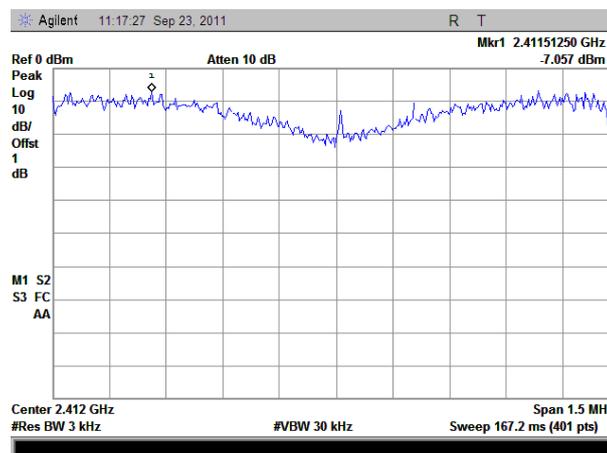


(Plot C: Chain1\_Channel = 11)

**2.4.3.2 802.11g Test mode**


**A. Test Verdict:**

Spectral power density (dBm/MHz)								
Channel: 1 Frequency, 2412MHz			Channel: 6 Frequency, 2437MHz			Channel: 11 Frequency, 2462MHz		
Test Result		Test plot	Test Result		Test plot	Test Result		Test plot
Chain1	Chain2		Chain1	Chain2		Chain1	Chain2	
-7.335	-7.829	Plot A/B	-7.995	-7.691	Plot C/D	-8.115	-8.45	Plot E/F
Measurement uncertainty: $\pm 1.3$ dB								


**B. Test Plots:**

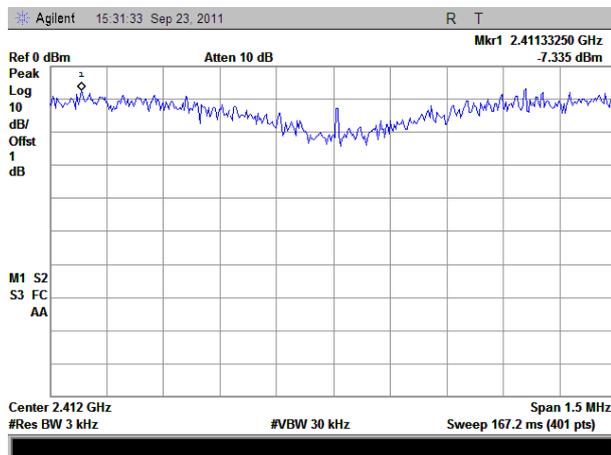


(Plot A: Chain1\_Channel = 1)

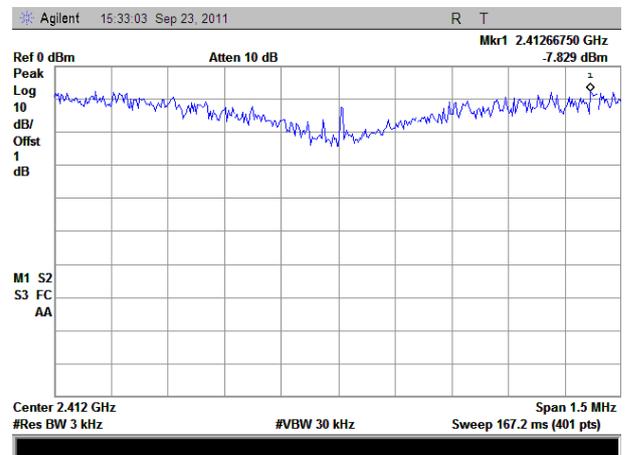


(Plot B: Chain2\_Channel = 1)

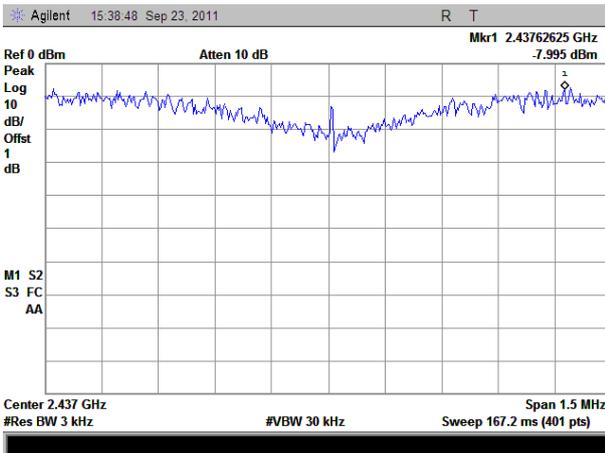


(Plot C: Chain1\_Channel = 6)

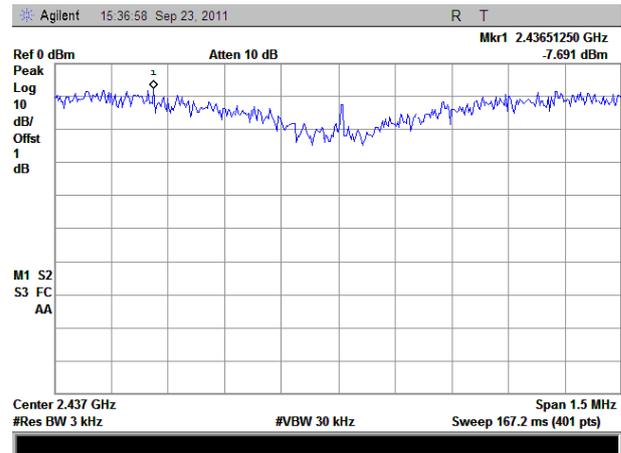

(Plot D: Chain2\_Channel = 6)

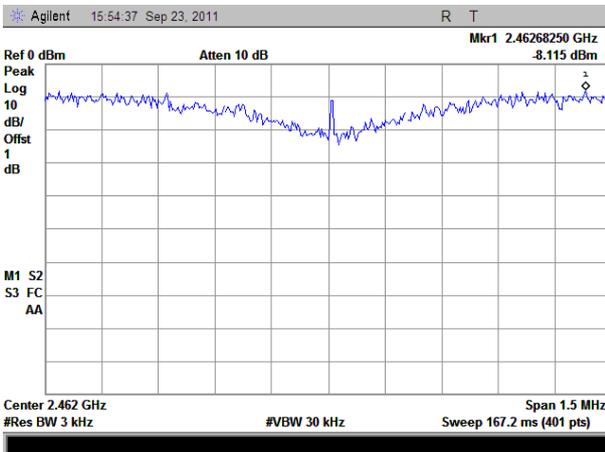

(Plot E: Chain1\_Channel = 11)

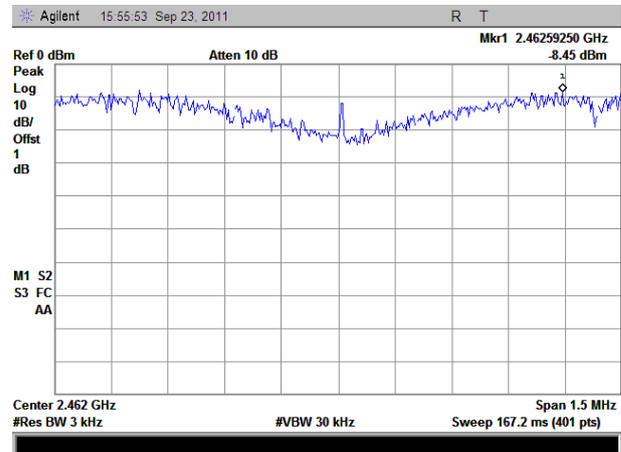

(Plot F: Chain2\_Channel = 11)



**2.4.3.3 802.11n-20MHz Test mode**


**A. Test Verdict:**

Spectral power density (dBm/MHz)								
Channel: 1 Frequency, 2412MHz			Channel: 6 Frequency, 2437MHz			Channel: 11 Frequency, 2462MHz		
Test Result		Total Power	Test Result		Total Power	Test Result		Total Power
Chain1	Chain2		Chain1	Chain2		Chain1	Chain2	
-6.408	-6.036	-3.206	-8.41	-7.317	-4.828	-7.15	-7.699	-4.401


Note: Total Power= chain1 level+ chain2 level (Liner)

Measurement uncertainty:  $\pm 1.3\text{dB}$


**B. Test Plots:**

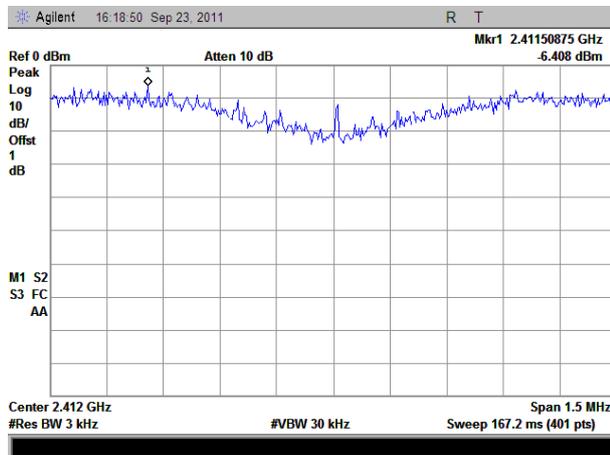


(Plot A: Chain1\_Channel = 1)

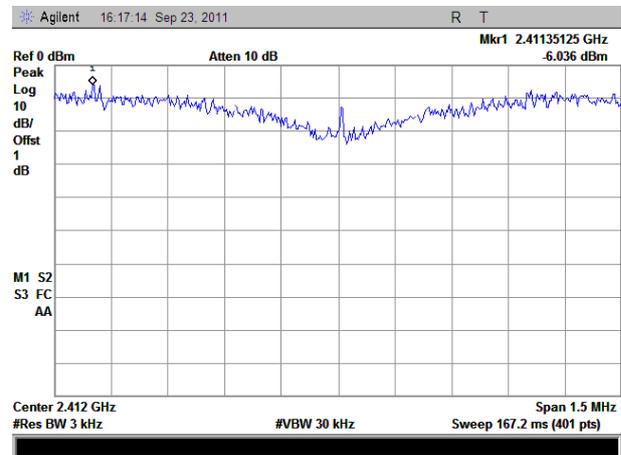


(Plot B: Chain2\_Channel = 1)

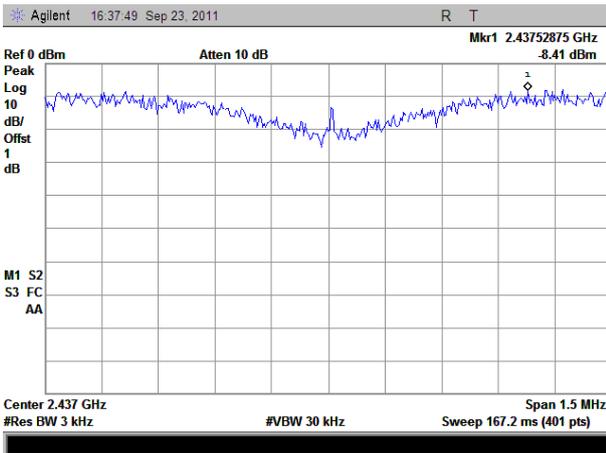


(Plot C: Chain1\_Channel = 6)

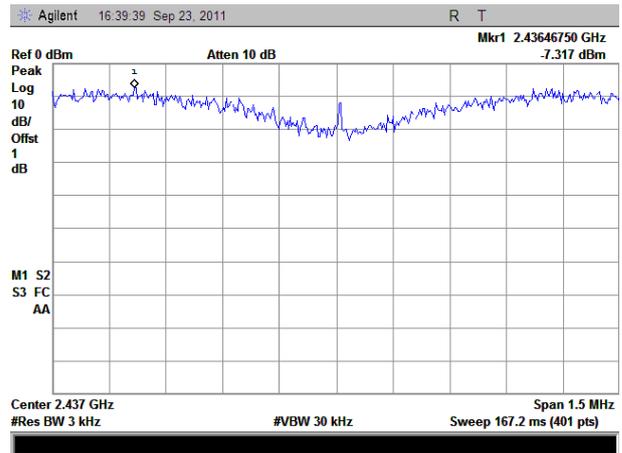

(Plot D: Chain2\_Channel = 6)

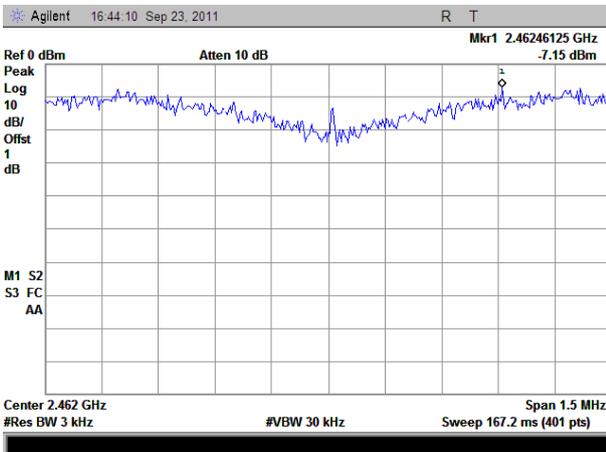

(Plot E: Chain1\_Channel = 11)

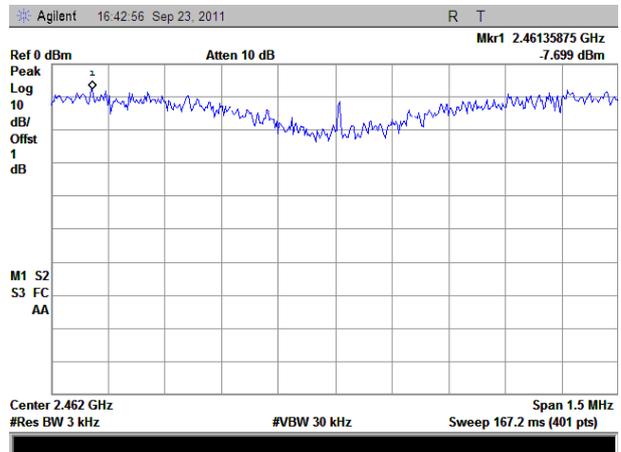

(Plot F: Chain2\_Channel = 11)

**2.4.3.4 802.11n-40MHz Test mode**


**A. Test Verdict:**

Spectral power density (dBm/MHz)								
Channel: 3 Frequency, 2422MHz			Channel: 6 Frequency, 2437MHz			Channel: 9 Frequency, 2452MHz		
Test Result		Total Power	Test Result		Total Power	Test Result		Total Power
Chain1	Chain2		Chain1	Chain2		Chain1	Chain2	
-6.479	-7.002	-3.726	-7.242	-6.76	-3.979	-8.452	-7.535	-4.962


Note: Total Power= chain1 level+ chain2 level (Liner)

Measurement uncertainty:  $\pm 1.3\text{dB}$


**B. Test Plots:**

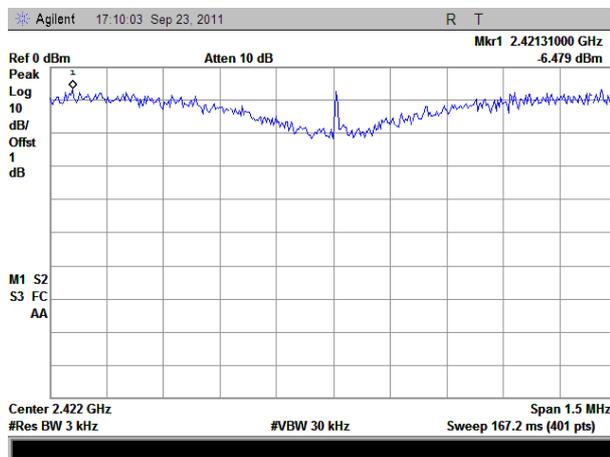


(Plot A: Chain1\_Channel = 3)

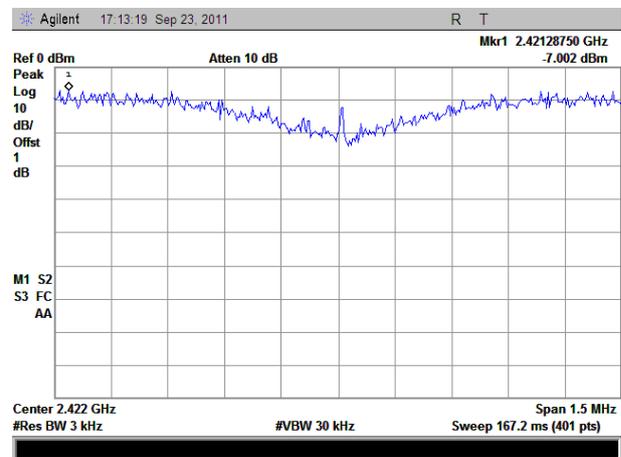


(Plot B: Chain2\_Channel = 3)

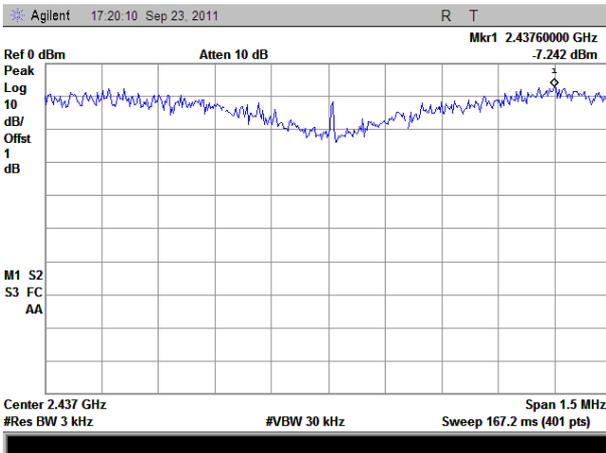


(Plot C: Chain1\_Channel = 6)

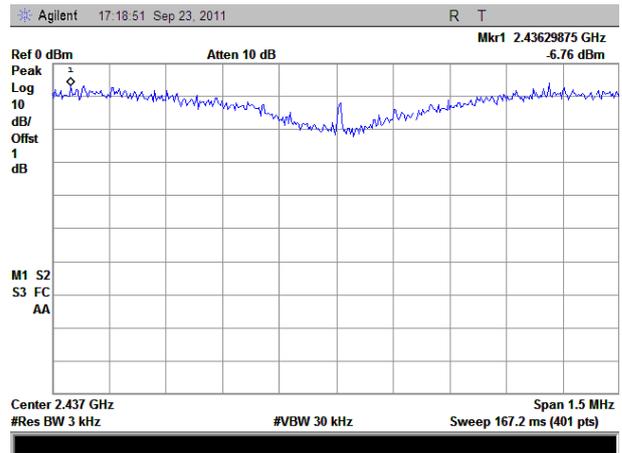

(Plot D: Chain2\_Channel = 6)

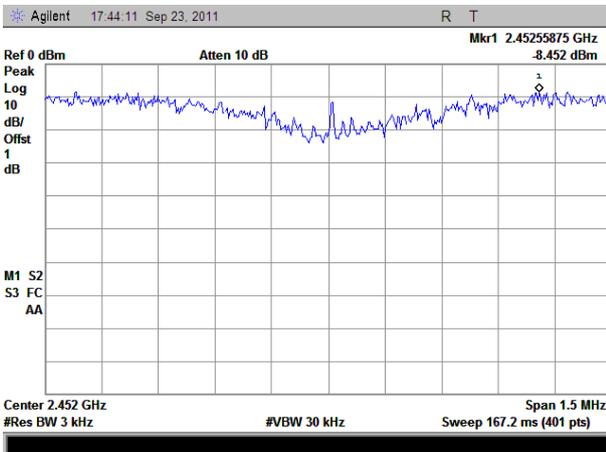

(Plot E: Chain1\_Channel = 9)

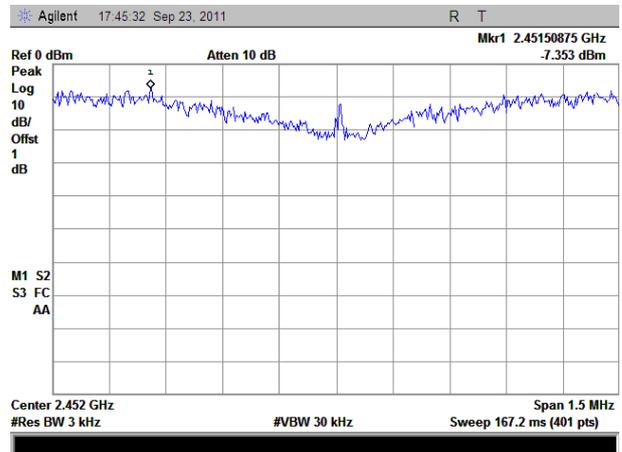

(Plot F: Chain2\_Channel = 9)


## 2.5 Band Edge

### 2.5.1 Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.5.2 Test Description

#### A. Test Setup

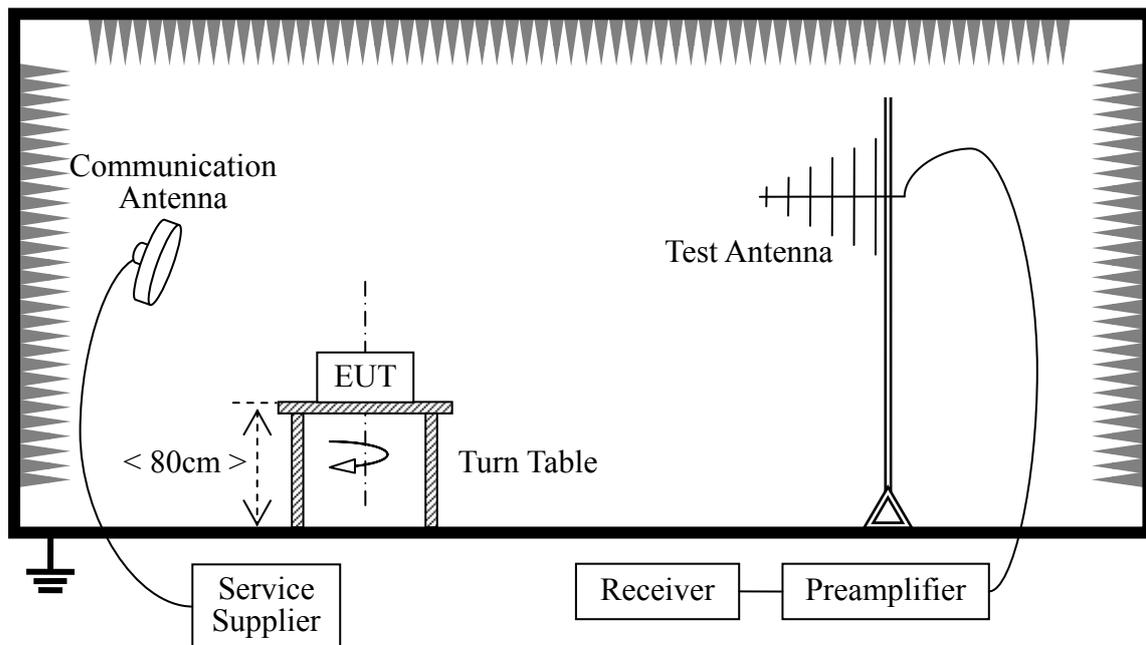

The Module of the EUT is powered by the Battery charged with the AC Adapter. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

#### C. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2011.5	2year
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2011.5	2year
Test Antenna	Schwarzbeck	BBHA 9120C	9120C-384	2011.5	2year

### 2.5.3 Test Result

The lowest and highest channels are tested to verify the band edge emissions.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]} + A_{\text{Factor}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  was built in receiver.



#### 3.5.3.1 802.11b Test mode

The lowest and highest channels are tested to verify the band edge emissions.


#### A. Test Verdict:

Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Verdict
		PK	AV	PK	AV	
1	2412	60.3	41.43	74	54	PASS
11	2462	60.57	40.08	74	54	PASS


#### B. Test Plot:

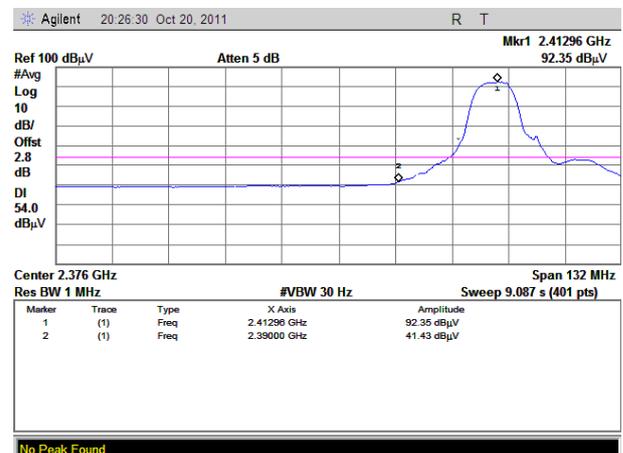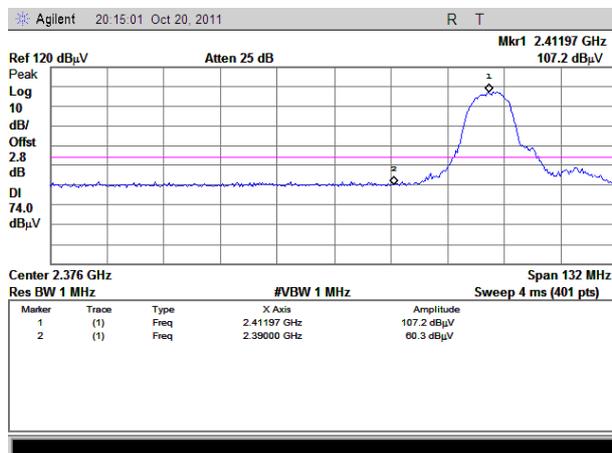

(Plot A1: Channel = 1 PEAK)

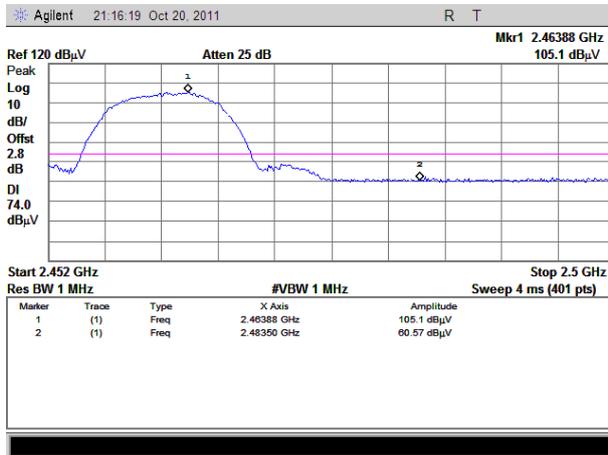

(Plot A2: Channel = 1 AVG)

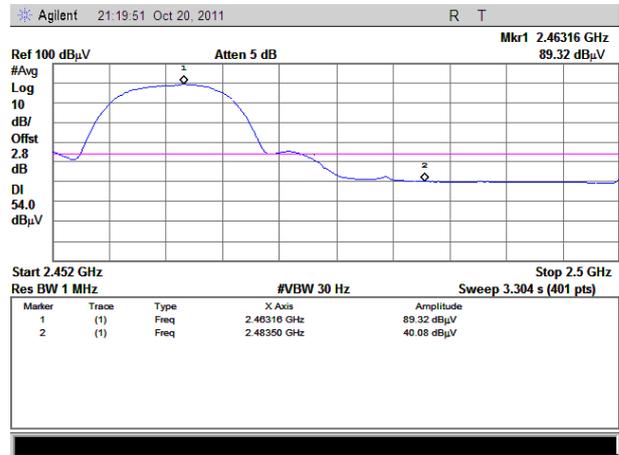

(Plot B1: Channel1 = 11 PEAK)

(Plot B2: Channel = 11 AVG)



### 2.5.3.2 802.11g Test mode

The lowest and highest channels are tested to verify the band edge emissions.


#### A. Test Verdict:

Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dBμV/m)		Limit (dBμV/m)		Verdict
		PK	AV	PK	AV	
1	2412	55.97	43.99	74	54	PASS
11	2462	57.65	44.39	74	54	PASS


#### B. Test Plots:

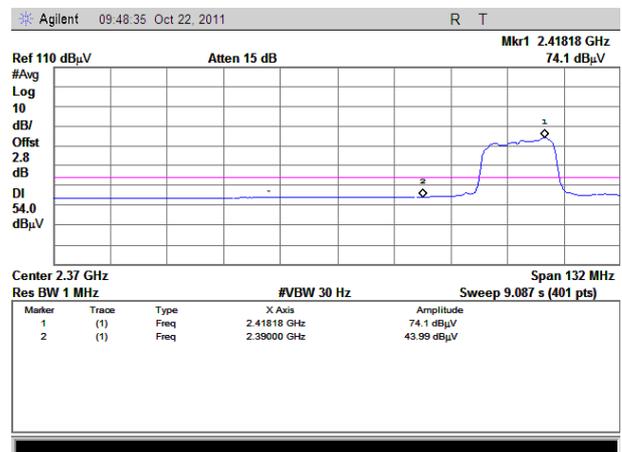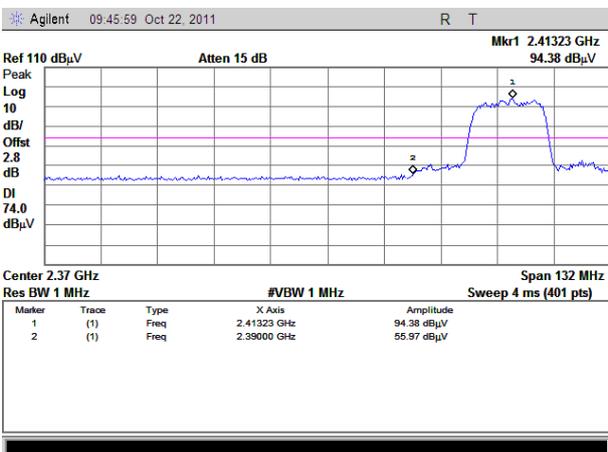

(Plot A1: Channel = 1 PEAK)

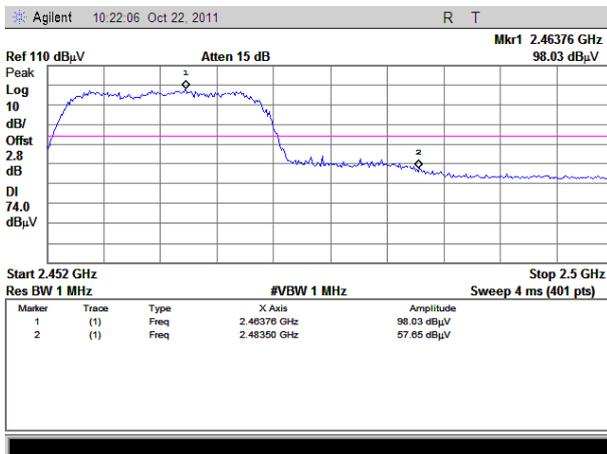

(Plot A2: Channel = 1 AVG)

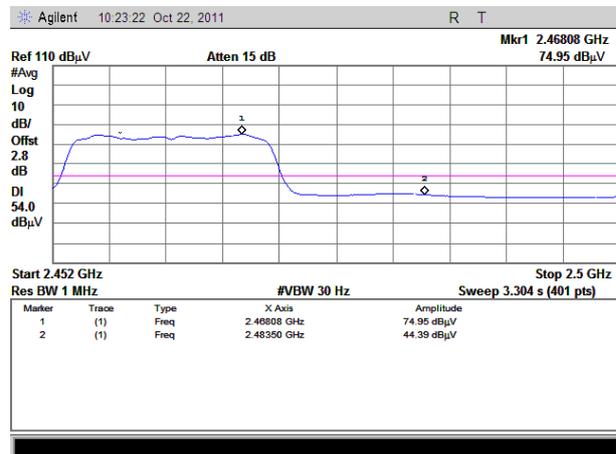

(Plot B1: Channel = 11 PEAK)

(Plot B2: Channel = 11 AVG)



### 2.5.3.3 802.11n-20MHz Test mode

The lowest and highest channels are tested to verify the band edge emissions.


#### A. Test Verdict:

Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dBμV/m)		Limit (dBμV/m)		Verdict
		PK	AV	PK	AV	
11	2462	62.7	47.45	74	54	PASS


#### B. Test Plots:

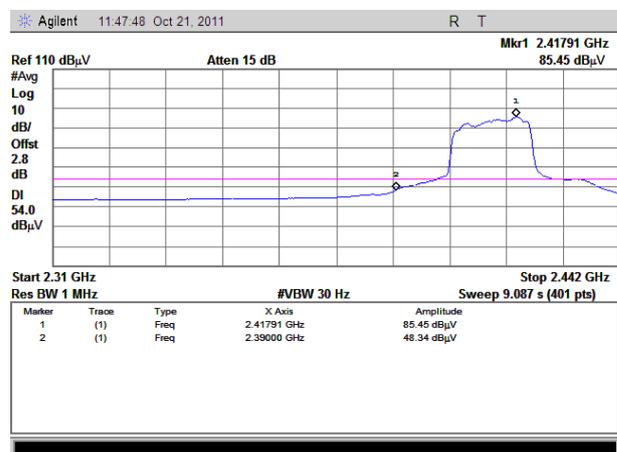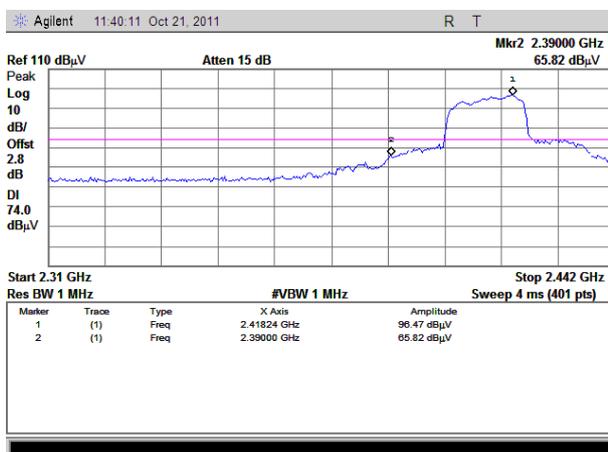

(Plot A1: Channel = 1 PEAK)

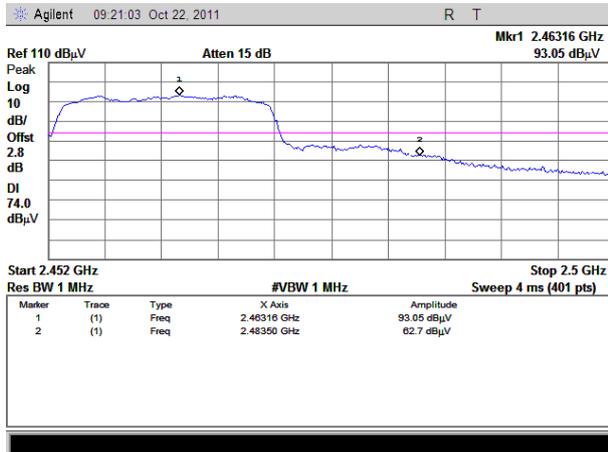

(Plot A2: Channel = 1 AVG)

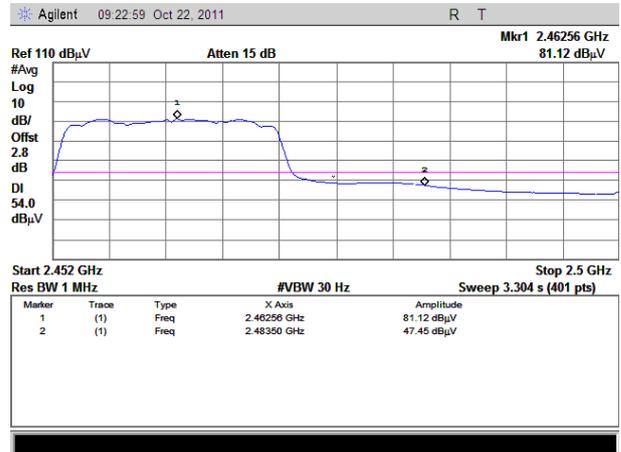

(Plot B1: Channel = 11 PEAK)

(Plot B2: Channel = 11 AVG)


### 2.5.3.4 802.11n-40MHz Test mode

The lowest and highest channels are tested to verify the band edge emissions.


#### A. Test Verdict:

Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dBμV/m)		Limit (dBμV/m)		Verdict
		PK	AV	PK	AV	
3	2422	53.94	43.66	74	54	PASS
9	2452	53.38	43.11	74	54	PASS


#### B. Test Plots:

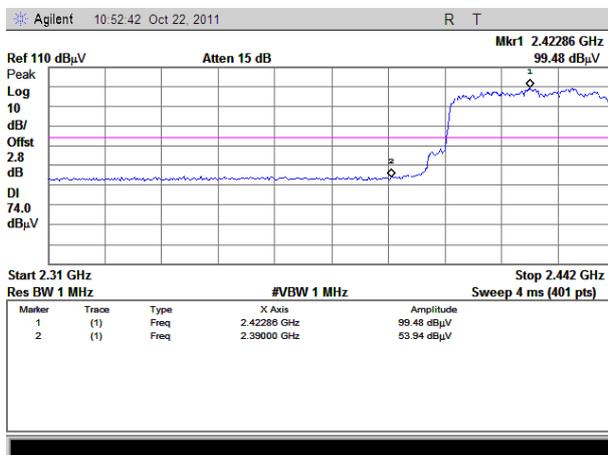


(Plot A1: Channel = 3 PEAK)

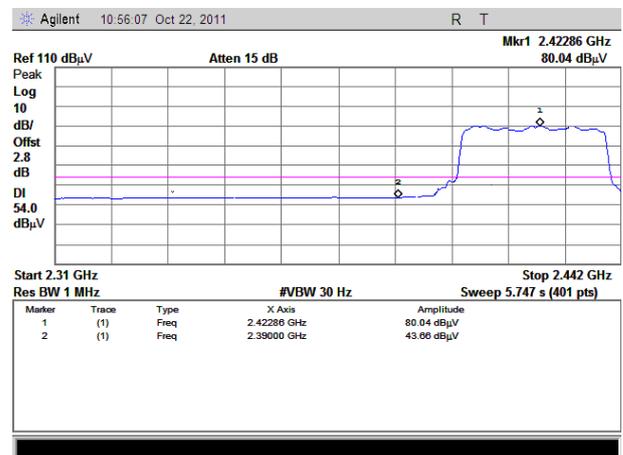

(Plot A2: Channel = 3 AVG)

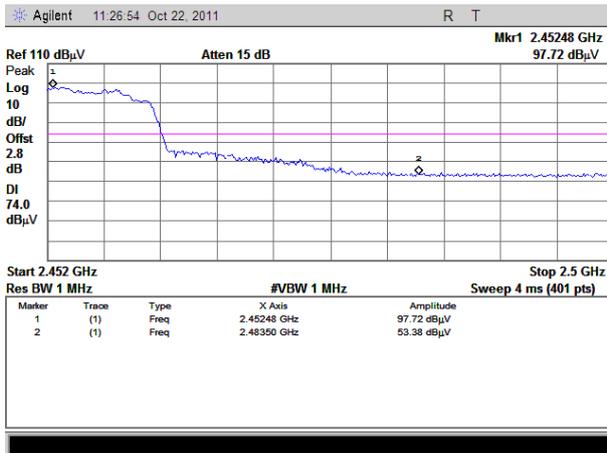

(Plot B1: Channel = 9 PEAK)

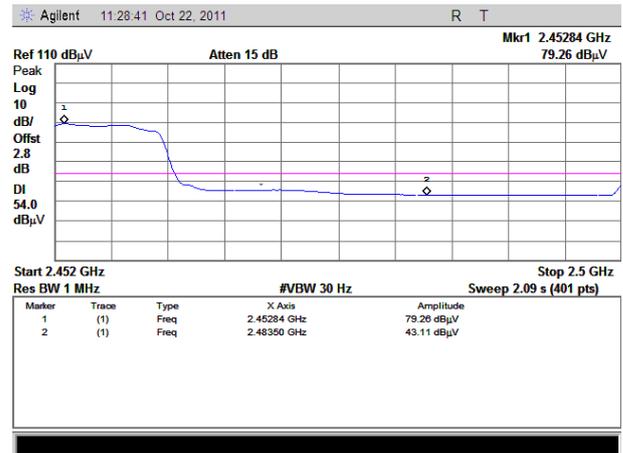

(Plot B2: Channel = 9 AVG)

## 2.6 Conducted Emission

### 2.6.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a  $50\mu\text{H}/50\Omega$  line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit ( $\text{dB}\mu\text{V}$ )	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

### 2.6.2 Test Description

#### A. Test Setup:

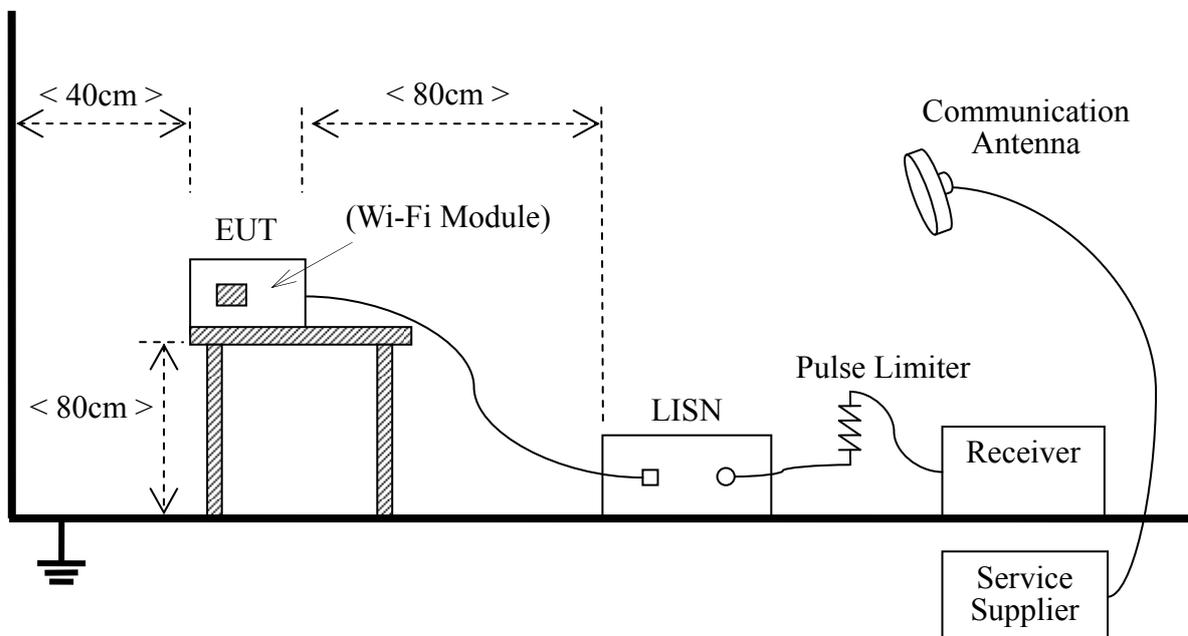

The EUT of the EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The factors of the site are calibrated to correct the reading. During the measurement, the EUT is activated and controlled by the Wi-Fi Service Supplier (SS) via a Common



Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

**B. Equipments List:**


Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2011.05	1year
LISN	Schwarzbeck	NSLK 8127	812744	2011.05	1year
Service Supplier	R&S	CMU200	100448	2011.05	1year
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-D	9391	(n.a.)	(n.a.)

**2.6.3 Test Result**


The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

**2.6.3.1 Test mode (WI-FI)**

**A. Test Plot:**

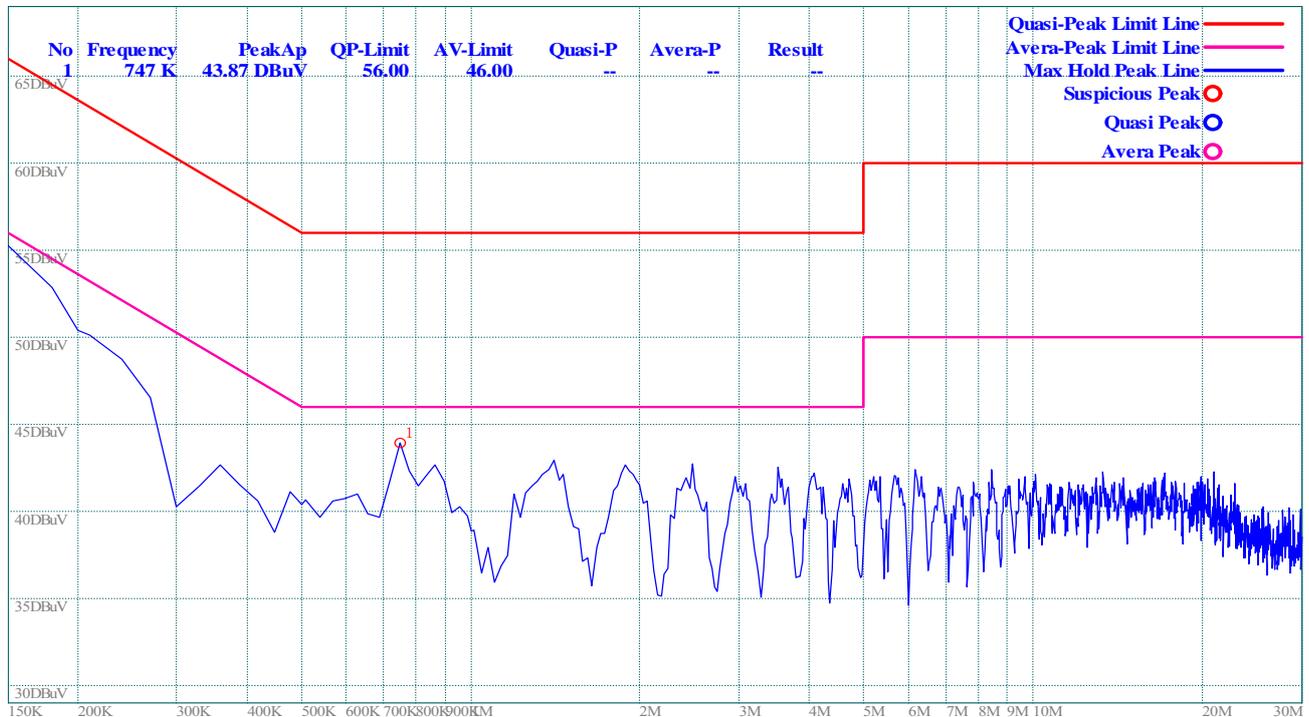

(Plot A: L Phase)

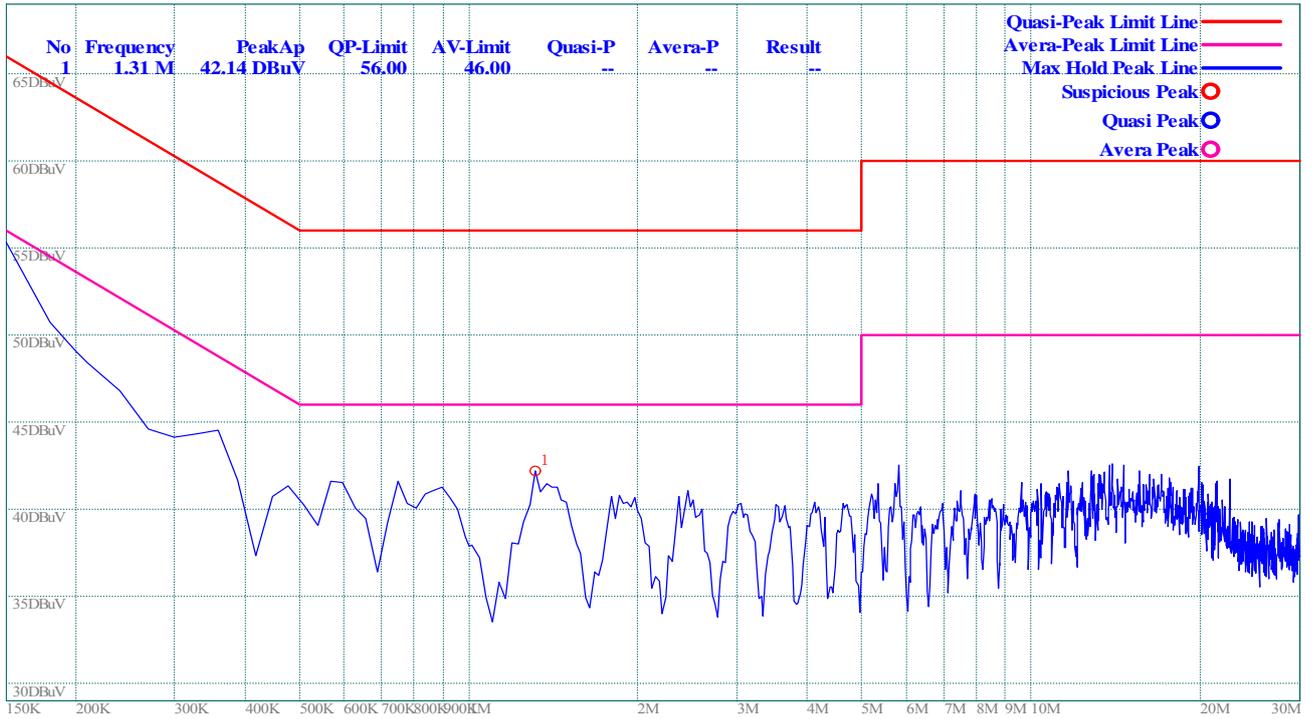

(Plot B: N Phase)

## 2.7 Radiated Emission

### 2.7.1 Requirement

According to FCC section 15.247(c), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).


According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

### 2.7.2 Test Description

#### A. Test Setup:

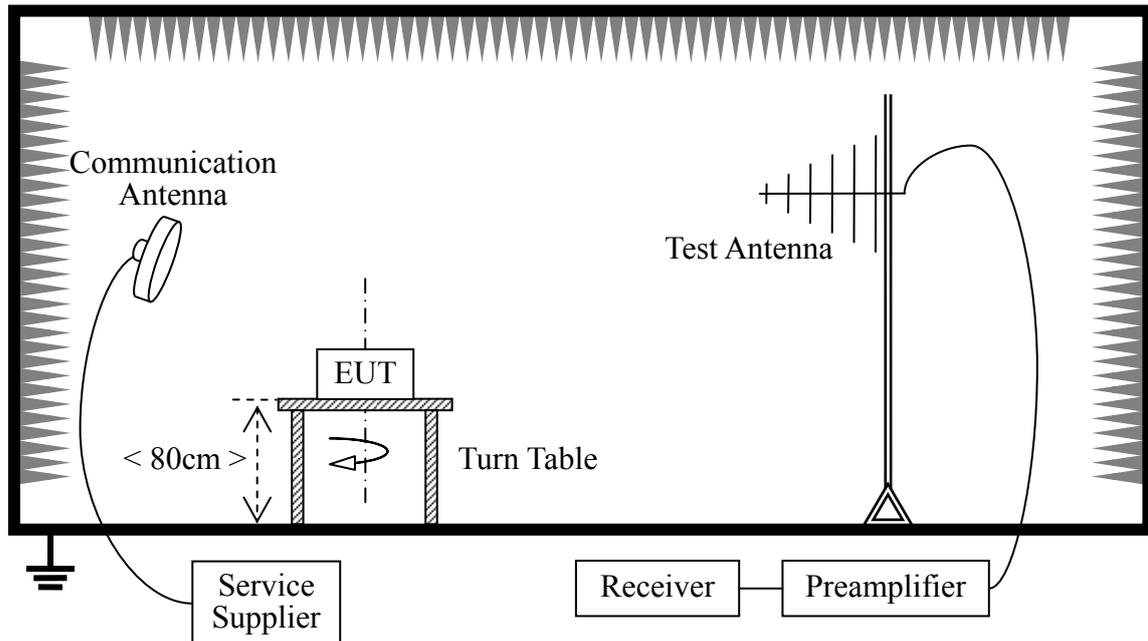

The EUT of the EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the EUT is activated and controlled by the Wireless Router via a Common Antenna, and is set to operate under hopping-on test mode.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

## B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	R&S	CMU200	100448	2011.05	1year
Receiver	Agilent	E7405A	US44210471	2011.05	1year
Semi-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2011.05	2year
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2011.05	1year
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2011.05	1year
Test Antenna -Loop	R&S	HFH2-Z6	100231	2011.05	1year

### 2.7.3 Test Result

#### 2.7.3.1 802.11b Test mode

The maximum radiated emission is searched using PK, if the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV or QP detectors.

#### A. Test Verdict for Harmonics:

##### The Fundamental Emissions


The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dB $\mu$ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
1	2412	88.88	82.24	Horizontal	Plot A.2
		94.94	90.02	Vertical	Plot A.3
6	2437	86.59	81.22	Horizontal	Plot B.2
		95.67	91.21	Vertical	Plot B.3
11	2462	86.21	81.19	Horizontal	Plot C.2
		91.69	86.21	Vertical	Plot C.3


Also refer to following plots for the emissions falling in the restricted bands.

#### B. Test Plots for the Whole Measurement Frequency Range:


##### Plots for Channel = 1

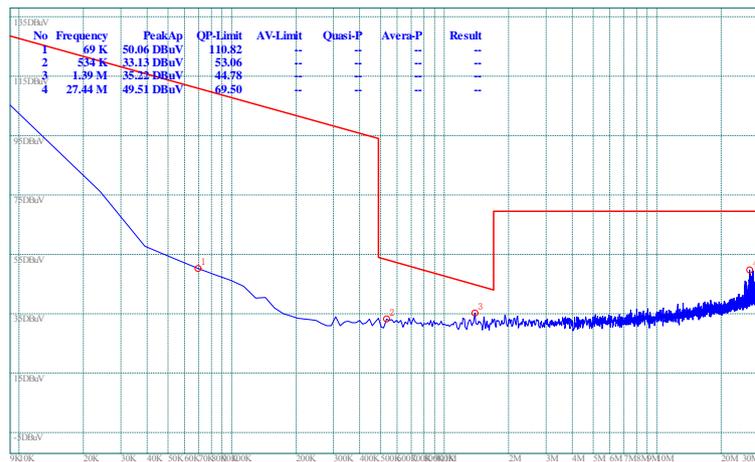

(Plot A.1: 9kHz to 30MHz)

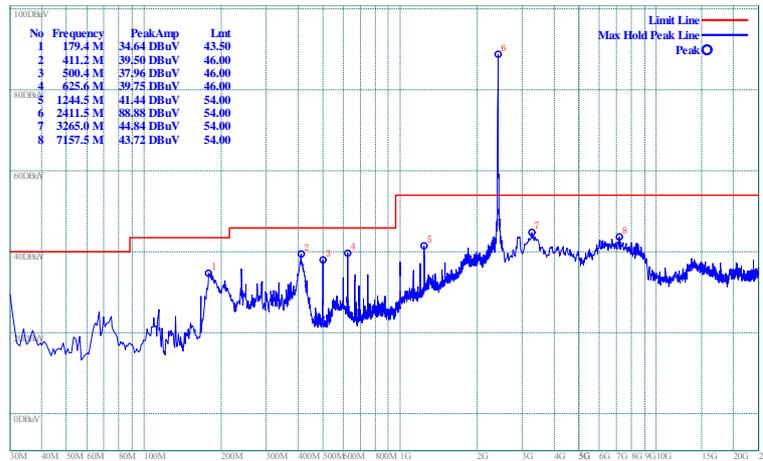


(Plot A.2: Antenna Horizontal, 30MHz to 25GHz)

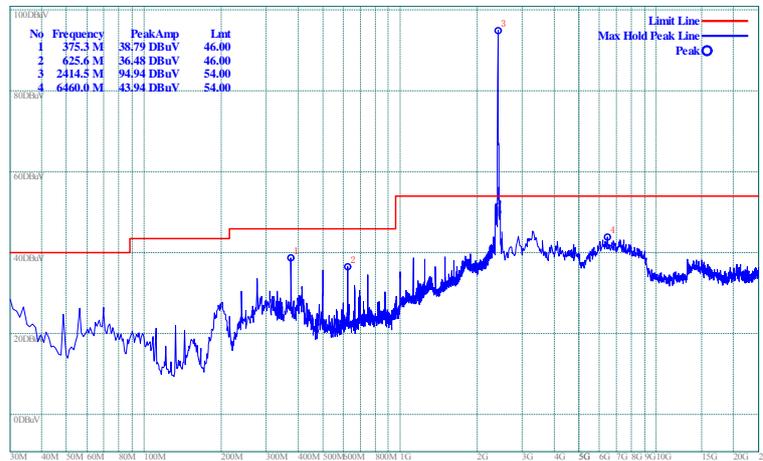


(Plot A.3: Antenna Vertical, 30MHz to 25GHz)


Plot for Channel = 6

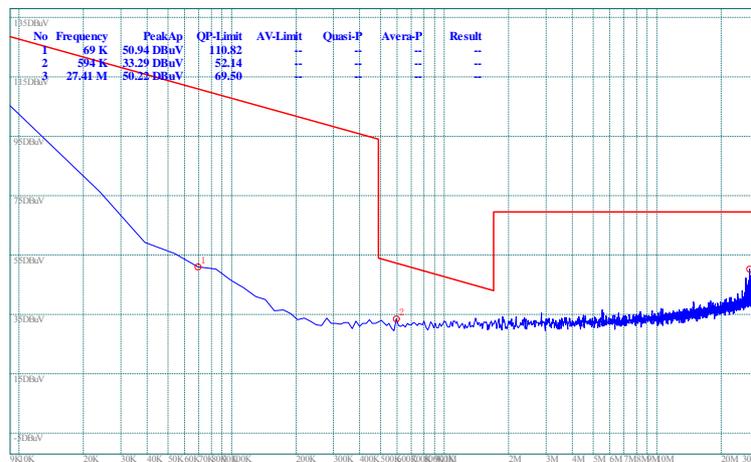

(Plot B.1: 9kHz to 30MHz)

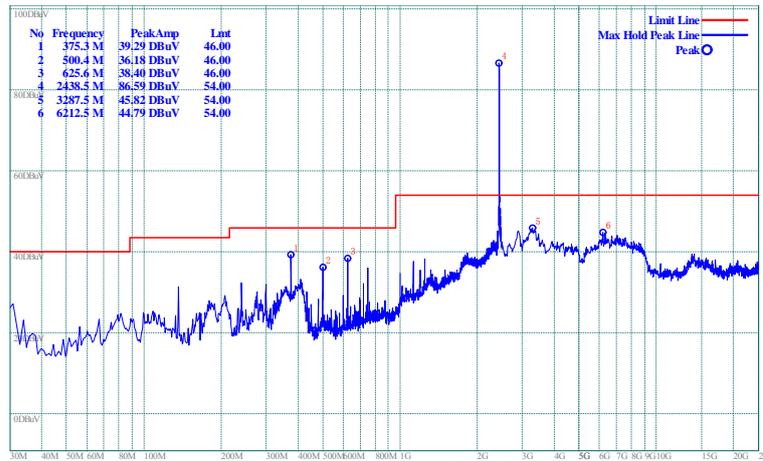


(Plot B.2: Antenna Horizontal, 30MHz to 25GHz)

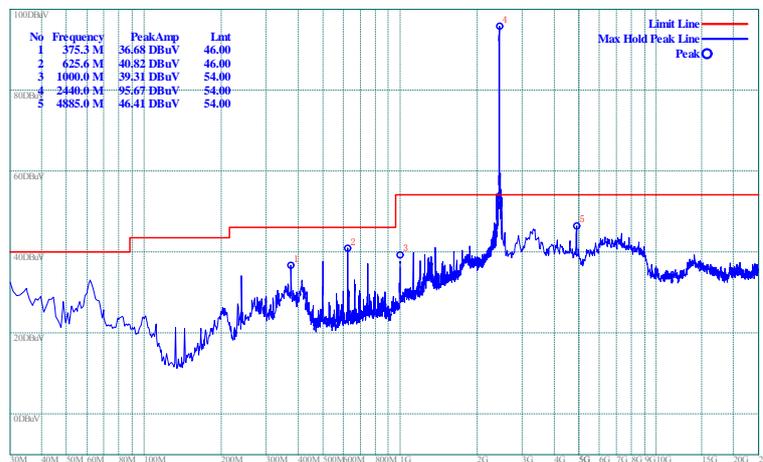


(Plot B.3: Antenna Vertical, 30MHz to 25GHz)


Plot for Channel = 11

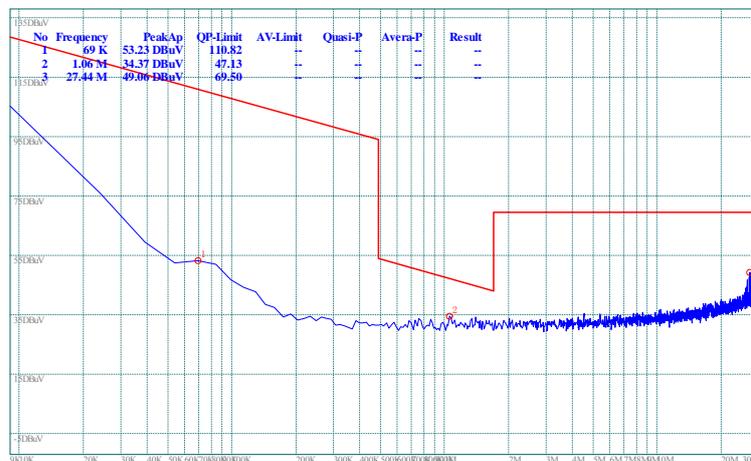

(Plot C.1: 9kHz to 30MHz)

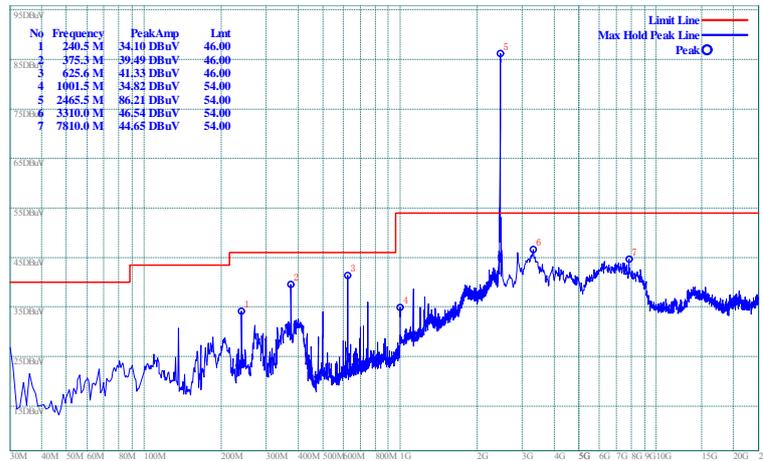

(Plot C.2: Antenna Horizontal, 30MHz to 25GHz)

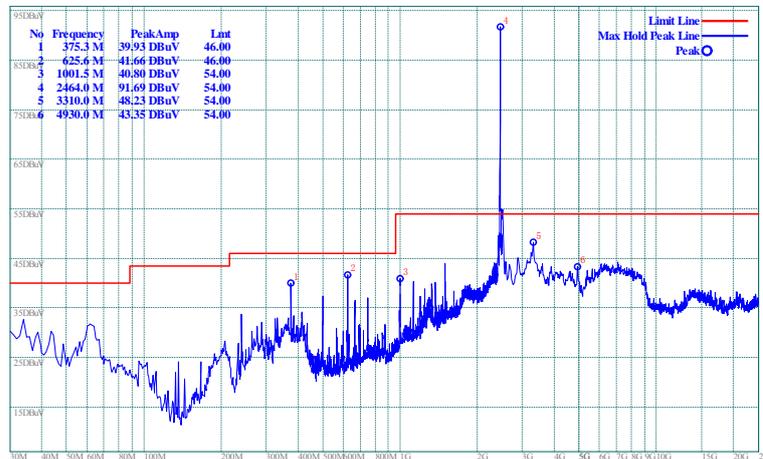

(Plot C.3: Antenna Vertical, 30MHz to 1GHz)

### 2.7.3.2 802.11g Test mode

The maximum radiated emission is searched using PK, if the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV or QP detectors.

#### A. Test Verdict for Harmonics:

##### The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.


Channel	Frequency (MHz)	Fundamental Emission (dB $\mu$ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
1	2412	80.50	75.62	Horizontal	Plot A.2

Channel	Frequency (MHz)	Fundamental Emission (dB $\mu$ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
6	2437	86.19	81.24	Vertical	Plot A.3
		81.60	76.35	Horizontal	Plot B.2
		86.26	82.03	Vertical	Plot B.3
11	2462	79.69	75.11	Horizontal	Plot C.2
		85.11	81.02	Vertical	Plot C.3


Also refer to following plots for the emissions falling in the restricted bands.

**B. Test Plots for the Whole Measurement Frequency Range:**


Plots for Channel = 1

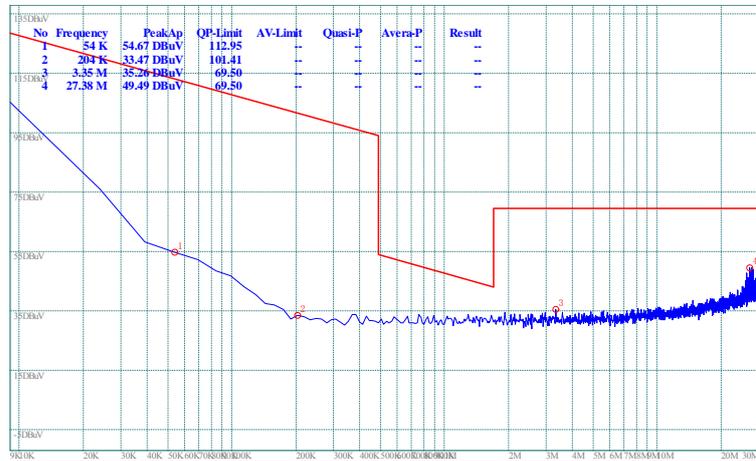

(Plot A.1: 9kHz to 30MHz)

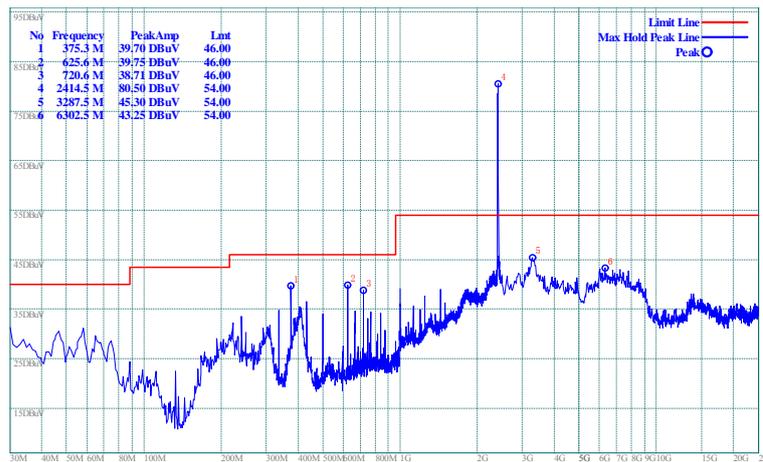


(Plot A.2: Antenna Horizontal, 30MHz to 25GHz)

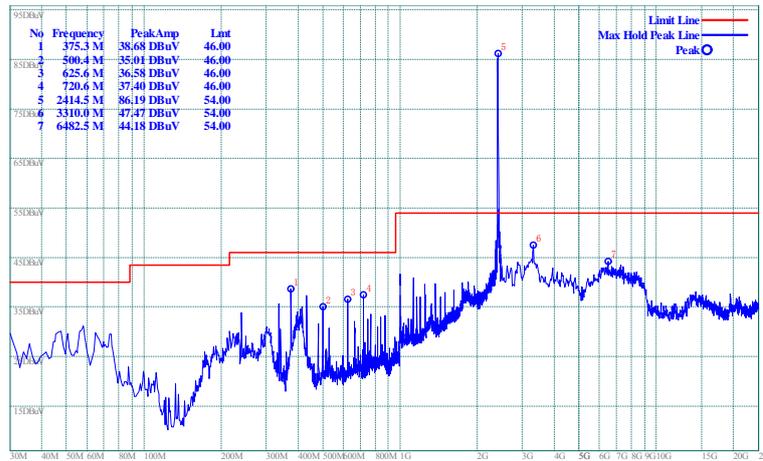


(Plot A.3: Antenna Vertical, 30MHz to 25GHz)


Plot for Channel = 6

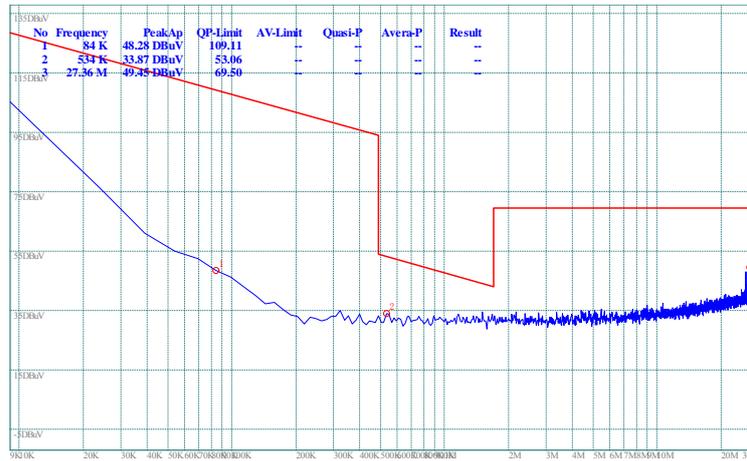

(Plot B.1: 9kHz to 30MHz)

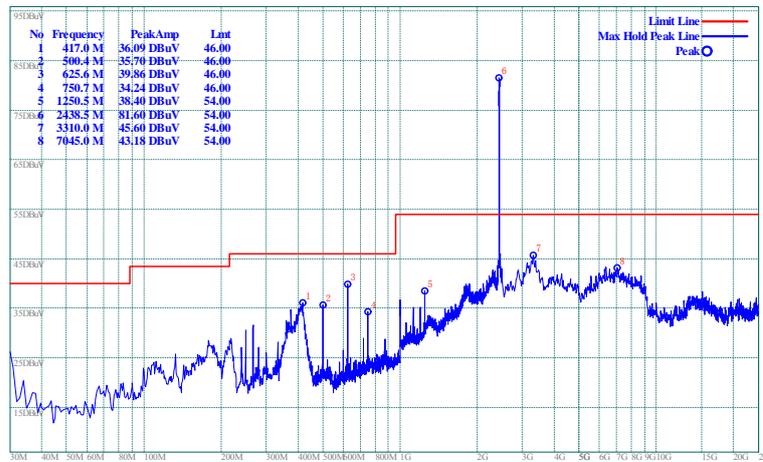


(Plot B.2: Antenna Horizontal, 30MHz to 25GHz)

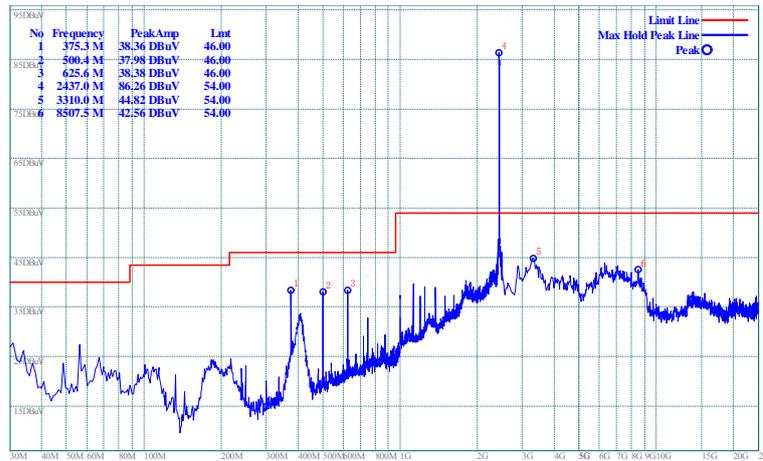


(Plot B.3: Antenna Vertical, 30MHz to 25GHz)


Plot for Channel = 11

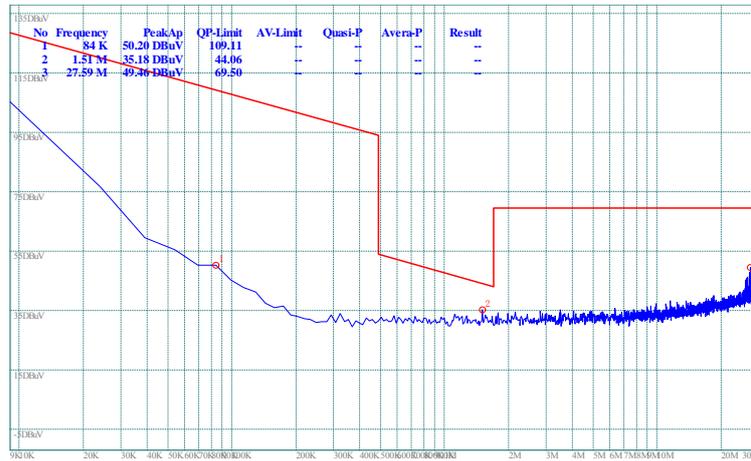

(Plot C.1: 9kHz to 30MHz)

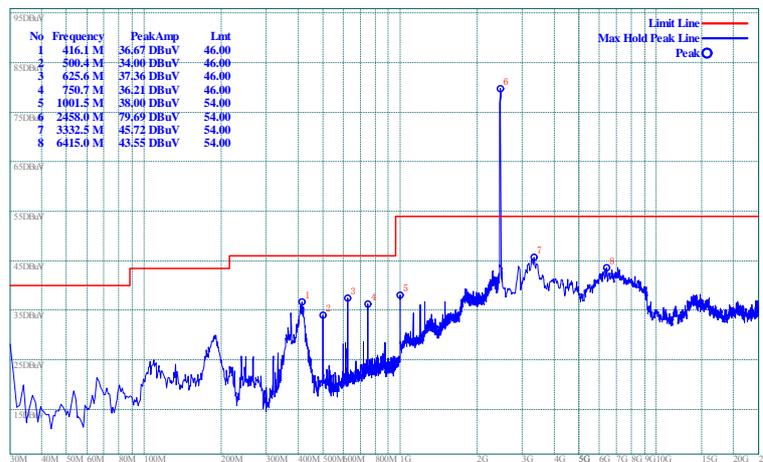

(Plot C.2: Antenna Horizontal, 30MHz to 25GHz)

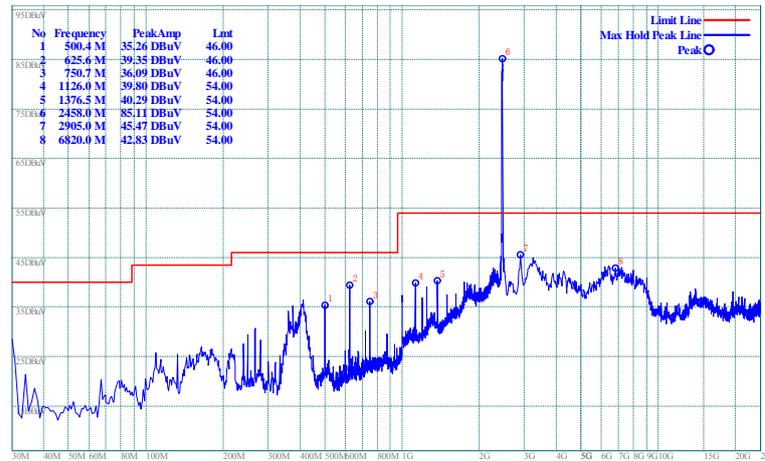

(Plot C.3: Antenna Vertical, 30MHz to 25GHz)

### 2.7.3.3 802.11n-20MHz Test mode

The maximum radiated emission is searched using PK, if the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV or QP detectors.

#### A. Test Verdict for Harmonics:

##### The Fundamental Emissions


The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dBμV/m)		Antenna Polarization	Refer to Plot
		PK	AV		
1	2412	80.95	76.21	Horizontal	Plot A.2
		84.10	80.12	Vertical	Plot A.3
6	2437	78.78	73.32	Horizontal	Plot B.2
		86.06	81.21	Vertical	Plot B.3
11	2462	80.60	76.52	Horizontal	Plot C.2
		85.25	80.13	Vertical	Plot C.3


Also refer to following plots for the emissions falling in the restricted bands.

**B. Test Plots for the Whole Measurement Frequency Range:**


Plots for Channel = 1

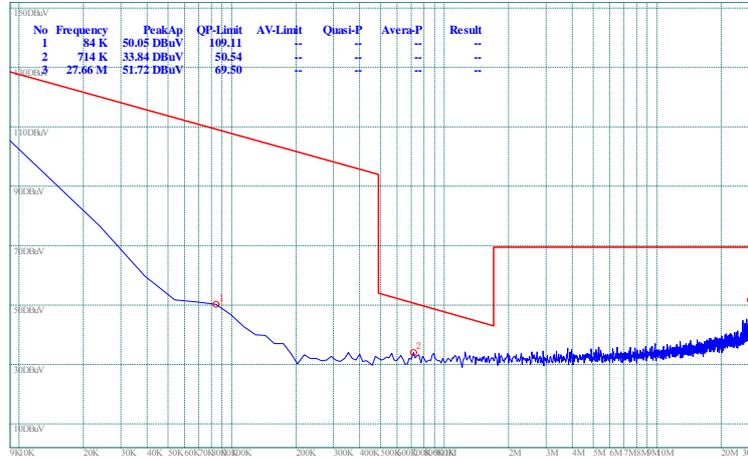

(Plot A.1: 9kHz to 30MHz)

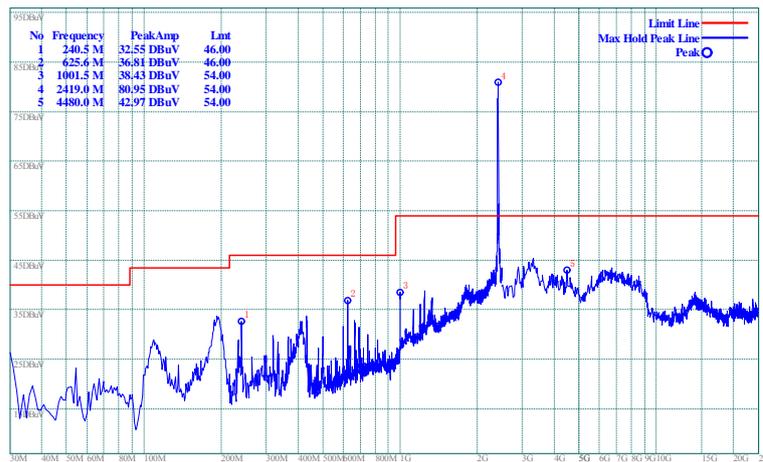


(Plot A.2: Antenna Horizontal, 30MHz to 25GHz)

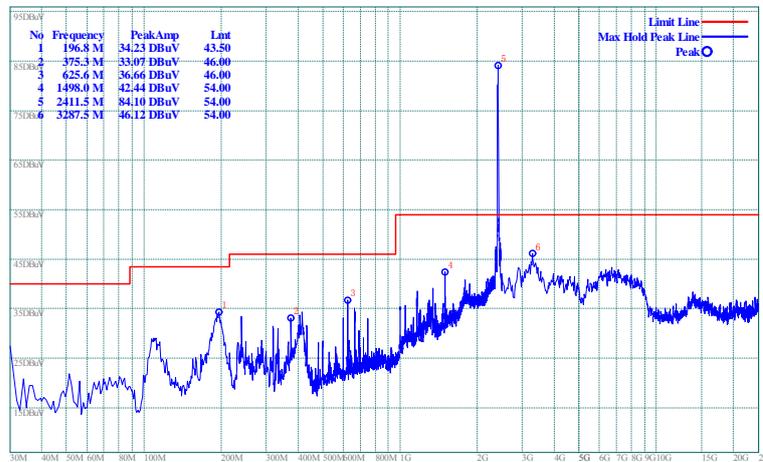


(Plot A.3: Antenna Vertical, 30MHz to 25GHz)


Plot for Channel = 6

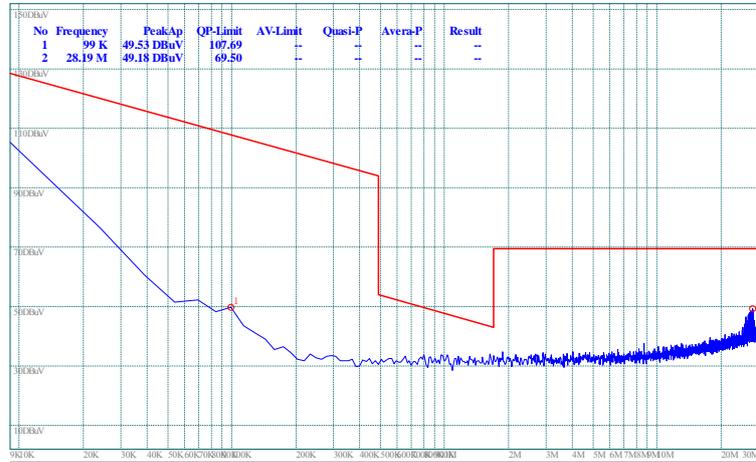

(Plot B.1: 9kHz to 30MHz)

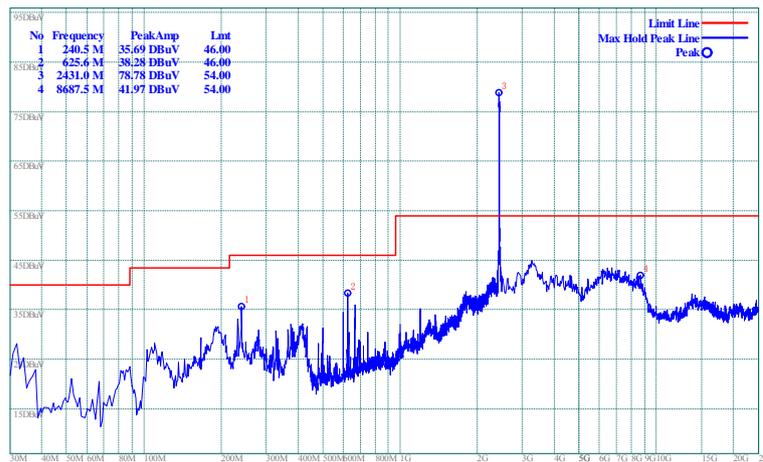


(Plot B.2: Antenna Horizontal, 30MHz to 25GHz)

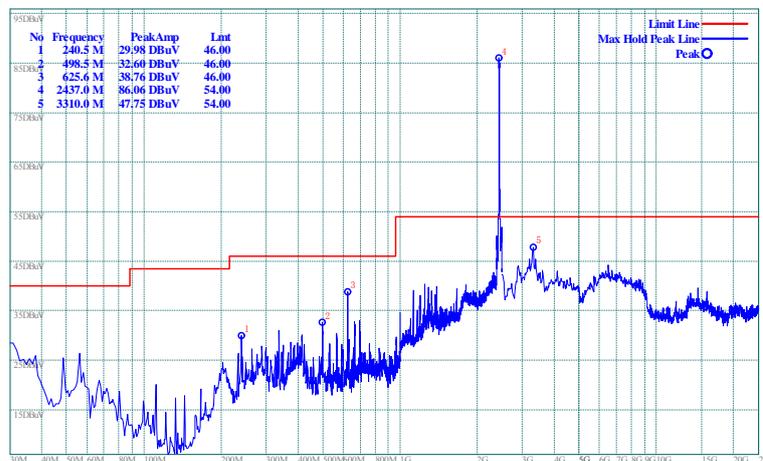


(Plot B.3: Antenna Vertical, 30MHz to 25GHz)


Plot for Channel = 11

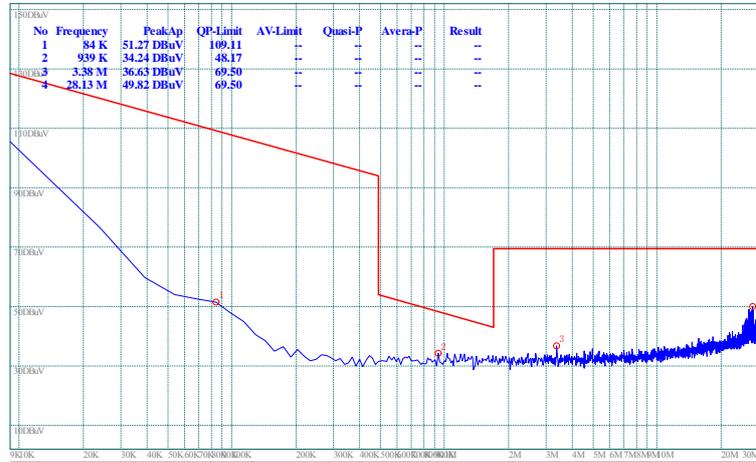

(Plot C.1: 9kHz to 30MHz)

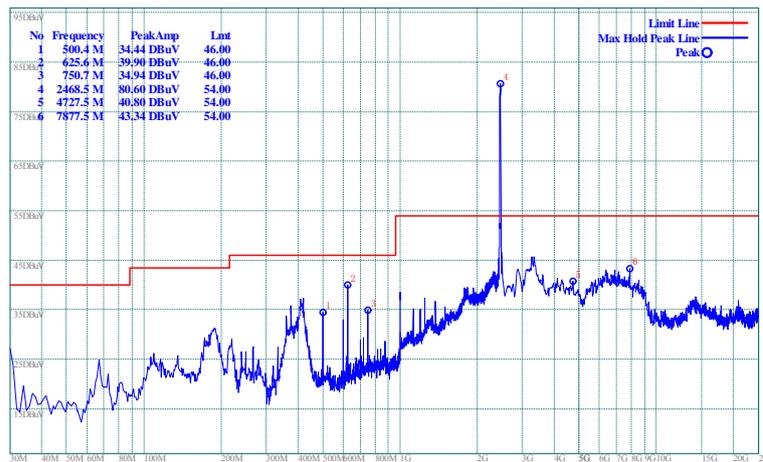

(Plot C.2: Antenna Horizontal, 30MHz to 25GHz)

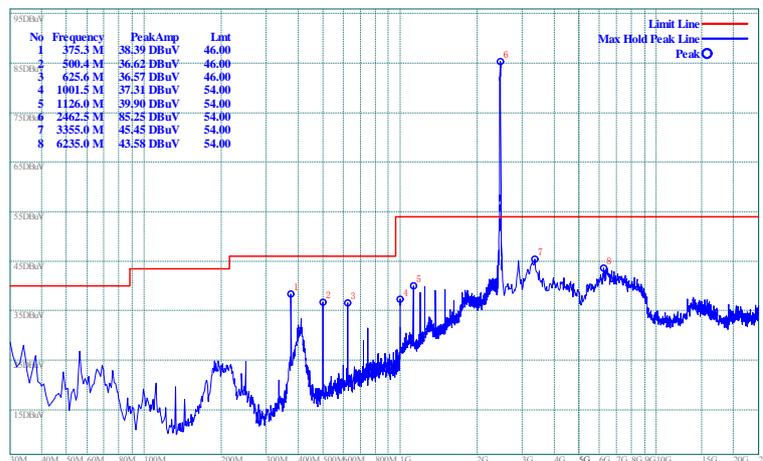

(Plot C.3: Antenna Vertical, 30MHz to 25GHz)

### 2.7.3.4 802.11n-40MHz Test mode

The maximum radiated emission is searched using PK, if the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV or QP detectors.

#### A. Test Verdict for Harmonics:

##### The Fundamental Emissions


The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dB $\mu$ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
3	2422	78.84	75.48	Horizontal	Plot A.2
		84.82	81.28	Vertical	Plot A.3
6	2437	81.72	75.38	Horizontal	Plot B.2
		84.34	80.49	Vertical	Plot B.3
9	2452	82.94	77.89	Horizontal	Plot C.2
		85.58	80.38	Vertical	Plot C.3


Also refer to following plots for the emissions falling in the restricted bands.

#### B. Test Plots for the Whole Measurement Frequency Range:


##### Plots for Channel = 3

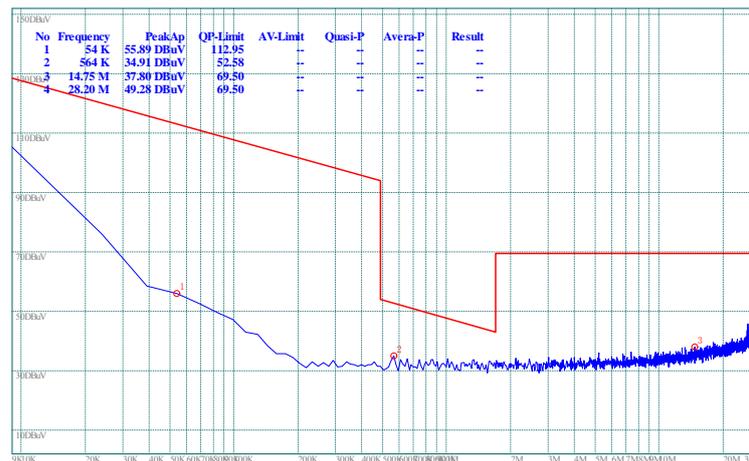

(Plot A.1: 9kHz to 30MHz)

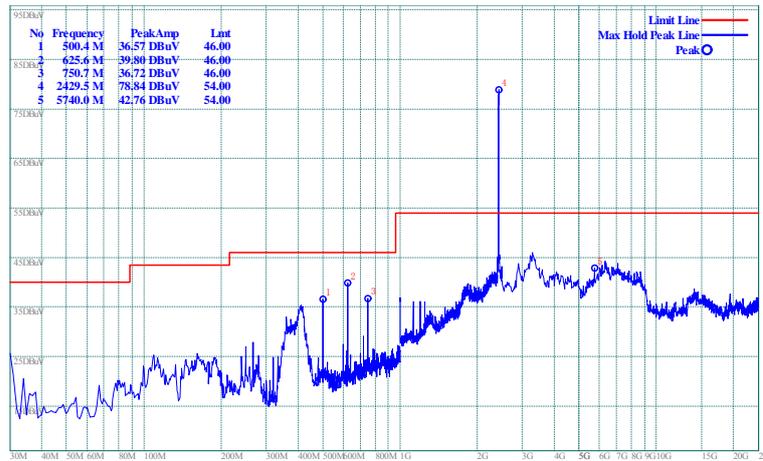


(Plot A.2: Antenna Horizontal, 30MHz to 25GHz)

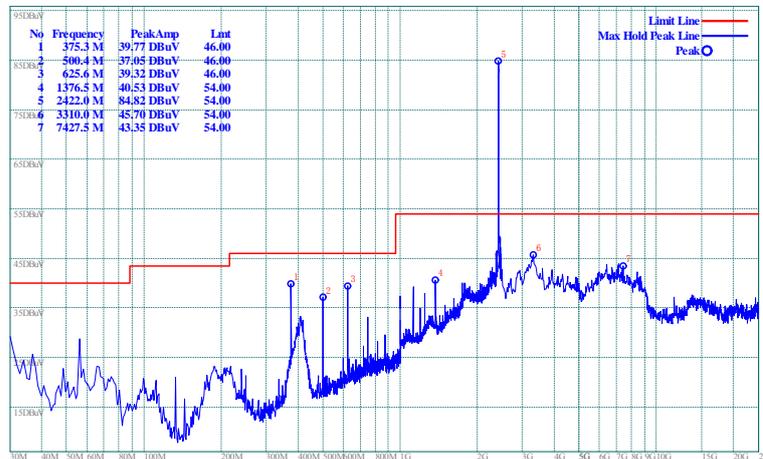


(Plot A.3: Antenna Vertical, 30MHz to 25GHz)


Plots for Channel = 6

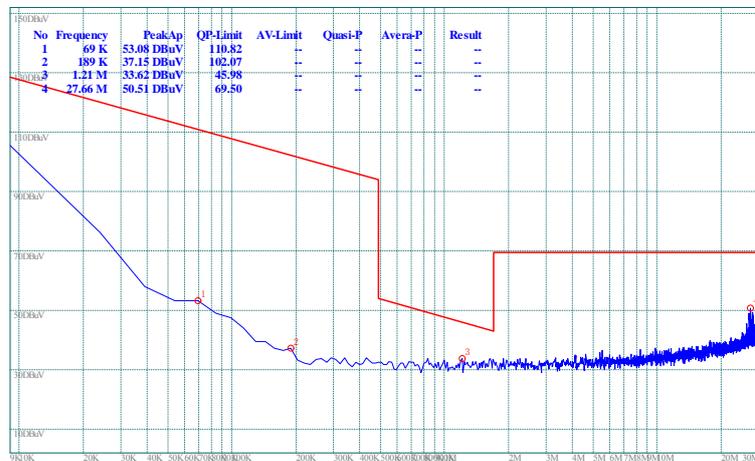

(Plot B.1: 9kHz to 30MHz)

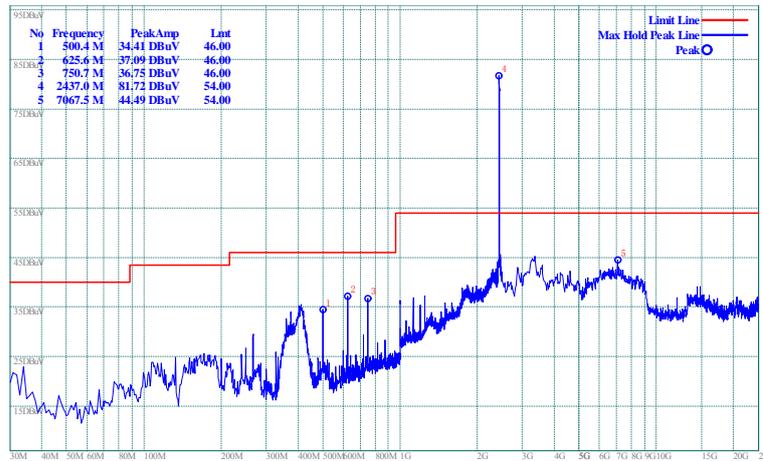


(Plot B.2: Antenna Horizontal, 30MHz to 25GHz)

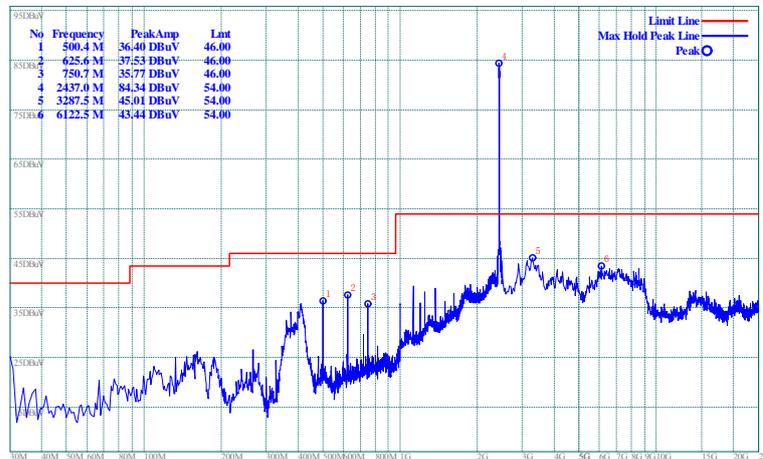


(Plot B.3: Antenna Vertical, 30MHz to 25GHz)


Plots for Channel = 9

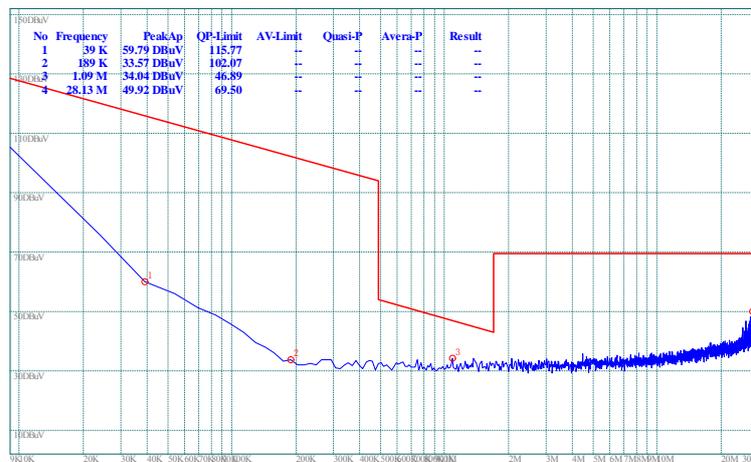

(Plot C.1: 9kHz to 30MHz)

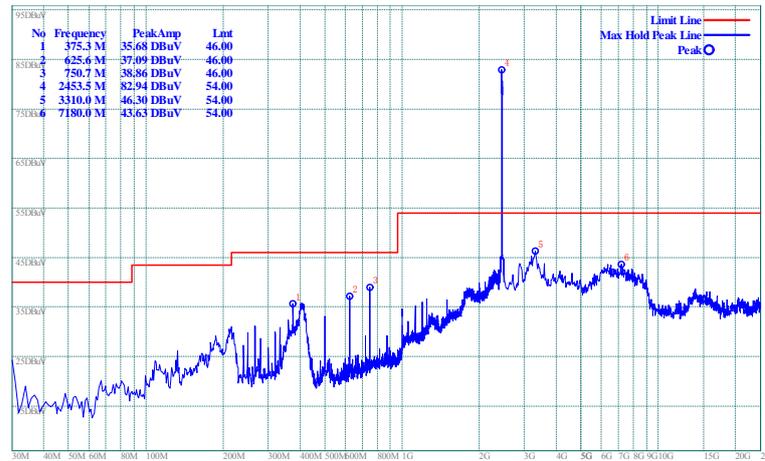

(Plot C.2: Antenna Horizontal, 30MHz to 25GHz)

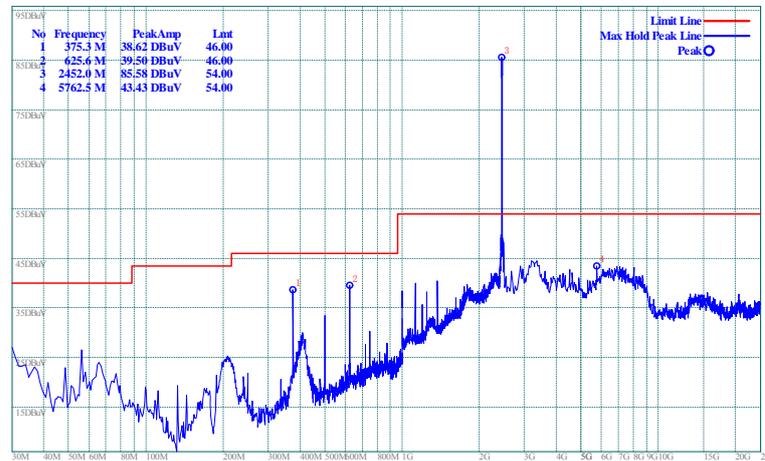

(Plot C.3: Antenna Vertical, 30MHz to 25GHz)

\*\* END OF REPORT \*\*