

1

2

3

4

5

6

Remark

Description

Editor

Date

1. 以下内容由供应商印刷

0.2
-0.2

85.0 mm

0.2
-0.2

45.0 mm

ZTE

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

FCC

Wi-Fi
CERTIFIED

6J

UL

US

LISTED

I.T.E

E307946

ZTE CORPORATION

Made in China

0.7 mm

6.4 mm

Wi-Fi
CERTIFIED

注意:

WIFI Logo尺寸要求如上,

WIFI Logo四周必须留有

大于2.1mm的空白

MAC:XX-XX-XX-XX-XX-XX

客户提供, 见产品信息发布流程,条码扫描信息不包含“-?”

BARCODE: CODE 128

GPON SN编号规则: ZTEGCXXXXXX

ZTEGC: 固定

XXXXXX: 16进制数, 取值区间由客户指定, 选取不重复值

BARCODE: CODE128

D-SN: ZTE ABCD YMD XXXXX (共15位)

ZTE: 固定;

ABCD: 同外箱标贴序列号前 4位相同;

YMD为生产年月日;

Y: 年份, 从2010开始,取字母A~Y,I,O,S,Z不能使用

M: 月份, 1- 9, 10-12月 为 A,B,C

D: 日期, 取值范围是1~9, A~Y, 如8代表8日

XXXXX为D-SN流水号, 00001~99999

特别说明一下: 最后五位的XXXXX流水号, 与产品序列号

最后五位的流水号不必完全一样,

可以自成体系, 不必连续, 可以有跳号

BARCODE: CODE 128

SSID及密钥需要打印在铭牌标贴上,

并和设备内的信息保持一致。

2. 以下日期和条码由工厂在供应商印刷的基础上打印

0.2
-0.2

85.0 mm

0.2
-0.2

45.0 mm

ZTE

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

FCC

Wi-Fi
CERTIFIED

6J

UL

US

LISTED

I.T.E

E307946

ZTE CORPORATION

Made in China

MAC:XX-XX-XX-XX-XX-XX

GPON SN: ZTEGCXXXXXX

D-SN:ZTEABCDYMDXXXXX

FCC ID : Q78-ZXHN F670E

2.4GHz SSID:

5GHz SSID:

WPA/WPA2-PSK:

Date:MMM YYYY

Product:GPON ONT

Model: ZXHN F670E

Power:12V 1.5A

被贴物表面(在对应的方格填充黑色):

塑料面

塑料弧面

铁机壳面/金属面

光油\覆膜彩盒

牛皮盒\外箱

光油彩盒90度折角封口

牛皮彩盒90度折角封口

电源线180度对折角

电源/PLC产品高温

其它()

注: 条码高度大于等于4mm.

来料方式: 卷装

日期格式: MMM YYYY,Arial, 8 pt 由工厂打印

英文月份的单词的前三个字母(大写), 然后空格, 4位阿拉伯数字年份

比如: FEB 2008

NOTES(技术要求):

1. 黑色印刷, 无边框, 尺寸如图, R1.0

(Black printing, R1.0)

2.材料: 50#亮白PET, 不上光膜, 过UV油墨, 背胶

(Material:50# bright white PET,UV coated,adhesive)

3. 原材料及后处理工艺均能满足我司《环保技术标准》要求

(Raw materials and the corresponding post processing

should meet requirements defined in the Environmental

Protection Technical Standards.)

ANG.TOL±

0°~30°/0.1°

30°~60°/0.3°

60°~90°/0.5°

RANGE

0~6

6~30

30~80

80~180

180~315

315~500

500~800

C1

0.1

0.2

0.25

0.3

0.5

0.7

0.9

C2

0.1

0.3

0.5

0.8

1.3

1.5

1.8

C3

0.15

0.4

0.9

1.2

1.8

2.5

3

C4

0.2

0.5

1.2

1.5

3

4

5

TITLE:

印刷盒底标贴

UNIT'S

mm

MAT'L

xxxx

FINISH

N/A

CUSTOMER:

ZTE

MODEL:

ZXHN F670E 国际无定制

PART NO:

6110000xxxxx

VER:

V01

DRAW

DATE:

SCALE

N/A

CHECK

SHEET

1 / 1

PDE

1

2


3

4

5

6

Label location

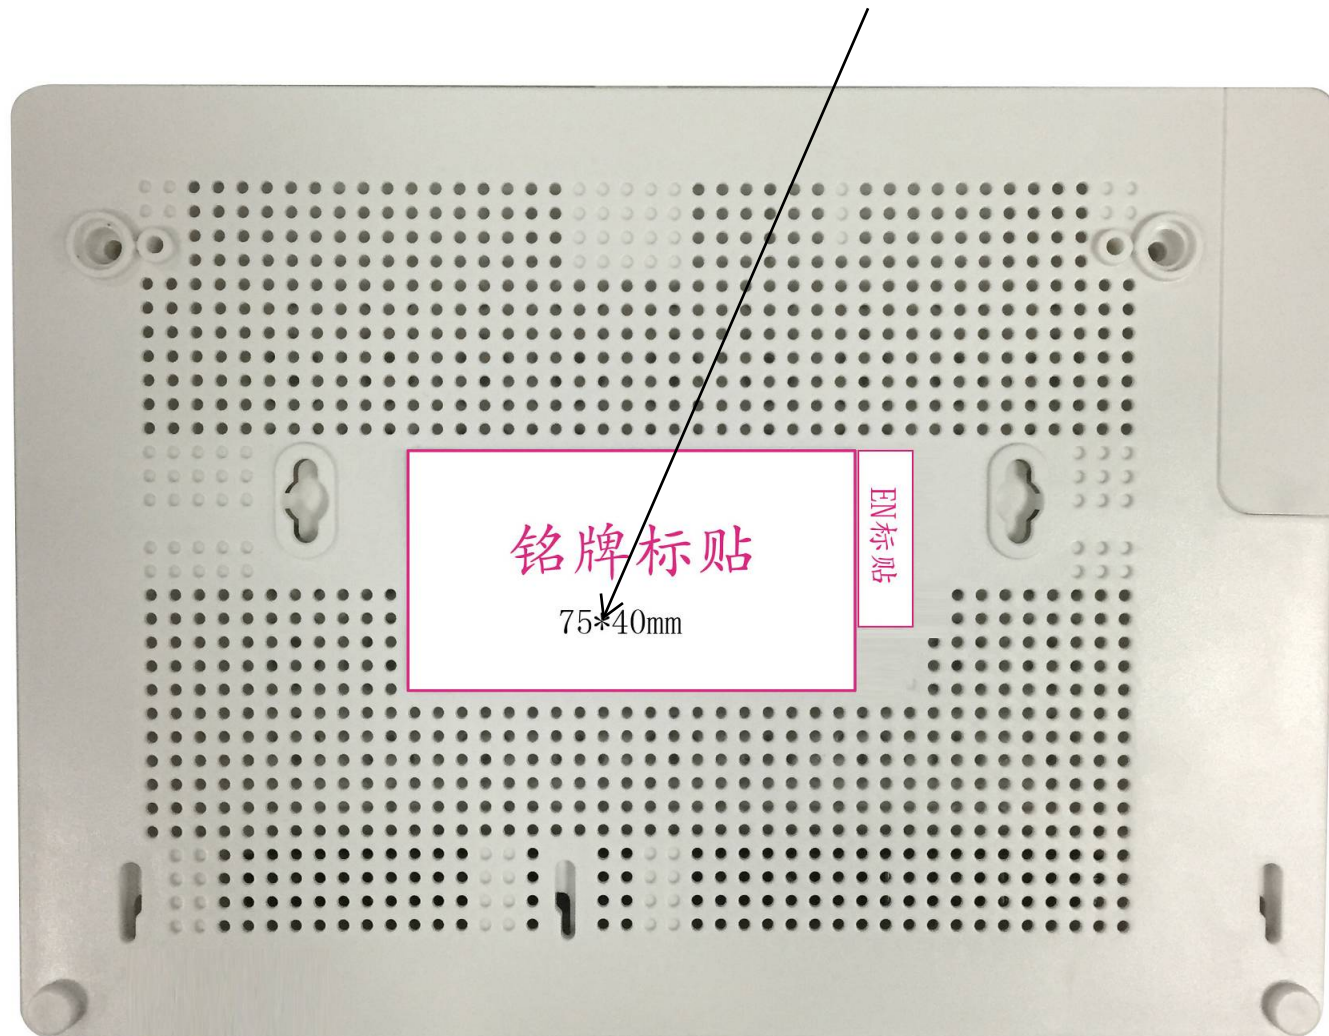

铭牌标贴

75*40mm

EN标贴