

FCC PART 15B
TEST REPORT

For
ZTE Corporation

ZTE Plaza, Hi-Tech, Industrial Park, Nanshan District,
Shenzhen, Guangdong, China

FCC ID: Q78-ZXHNH168M

Report Type: Original Report	Product Type: Home Gateway
Test Engineer: Allan An	<i>Allan An</i>
Report Number: RSZ110527001-00b	
Report Date: 2011-09-30	
Reviewed By: EMC Engineer	Merry Zhao <i>merry.zhao</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....3
 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)3
 OBJECTIVE3
 RELATED SUBMITTAL(S)/GRANT(S).....3
 TEST FACILITY3

SYSTEM TEST CONFIGURATION.....5
 JUSTIFICATION5
 EUT EXERCISE SOFTWARE5
 EQUIPMENT MODIFICATIONS5
 LOCAL SUPPORT EQUIPMENT LIST AND DETAILS5
 EXTERNAL I/O CABLE.....5
 CONFIGURATION OF TEST SETUP5
 BLOCK DIAGRAM OF TEST SETUP6

SUMMARY OF TEST RESULTS7

FCC §15.107 – AC LINE CONDUCTED EMISSIONS.....8
 MEASUREMENT UNCERTAINTY8
 EUT SETUP8
 EMI TEST RECEIVER SETUP.....9
 TEST PROCEDURE9
 TEST EQUIPMENT LIST AND DETAILS.....9
 TEST RESULTS SUMMARY9
 TEST DATA9

FCC §15.109 - RADIATED EMISSIONS12
 MEASUREMENT UNCERTAINTY12
 EUT SETUP12
 EMI TEST RECEIVER SETUP.....13
 TEST PROCEDURE13
 CORRECTED AMPLITUDE & MARGIN CALCULATION13
 TEST EQUIPMENT LIST AND DETAILS.....14
 TEST RESULTS SUMMARY14
 TEST DATA14

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *ZTE Corporation's* product, model number: *ZXHN H168M (FCC ID: Q78-ZXHNH168M)* (the "EUT") in this report is a *Home Gateway*, which was measured approximately: 21.5 cm (L) x 18.5 cm (W) x 7.5 cm (H), rated input voltage: DC 12.0V adapter.

Adapter information:

Model: RD1201500-C55-1MG

Input: AC 100-240V, 50/60 Hz, Max 0.6A

Output: DC 12V, 1.5A

** All measurement and test data in this report was gathered from production sample serial number: 1105148 (Assigned by BACL, Shenzhen). The EUT was received on 2011-05-27.*

Objective

This report is prepared on behalf of *ZTE Corporation* in accordance with Part 2, Subpart J, Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine compliance with FCC Part 15 Class B.

Related Submittal(s)/Grant(s)

FCC Part 15.247WiFi DTS submission with FCC ID: Q78-ZXHNH168M

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

N/A

Equipment Modifications

No modification was made to the unit tested.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	D600	00045-438-852-864
ZTE	Dslam	9806H	N/A


External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded Undetachable Power Cable	1.5	EUT	AC Power

Configuration of Test Setup

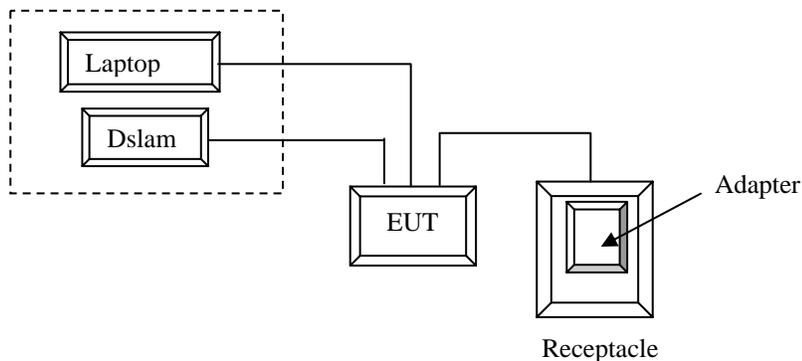

Block Diagram of Test Setup

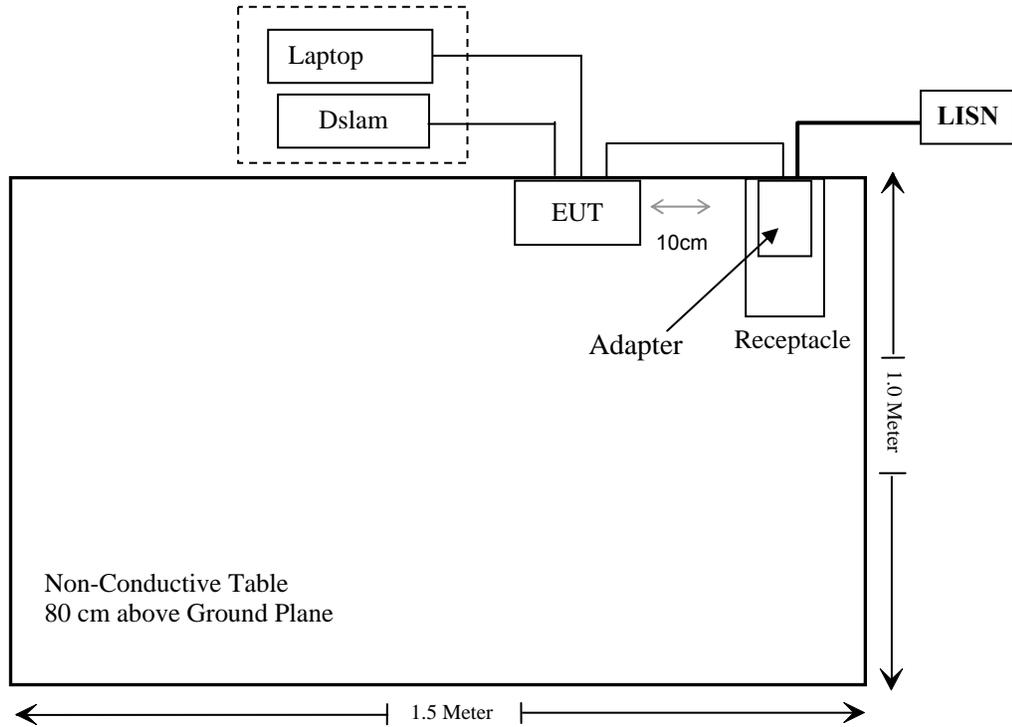

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance


FCC §15.107 – AC LINE CONDUCTED EMISSIONS

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 2.4 dB. (k=2, 95% level of confidence)

EUT Setup

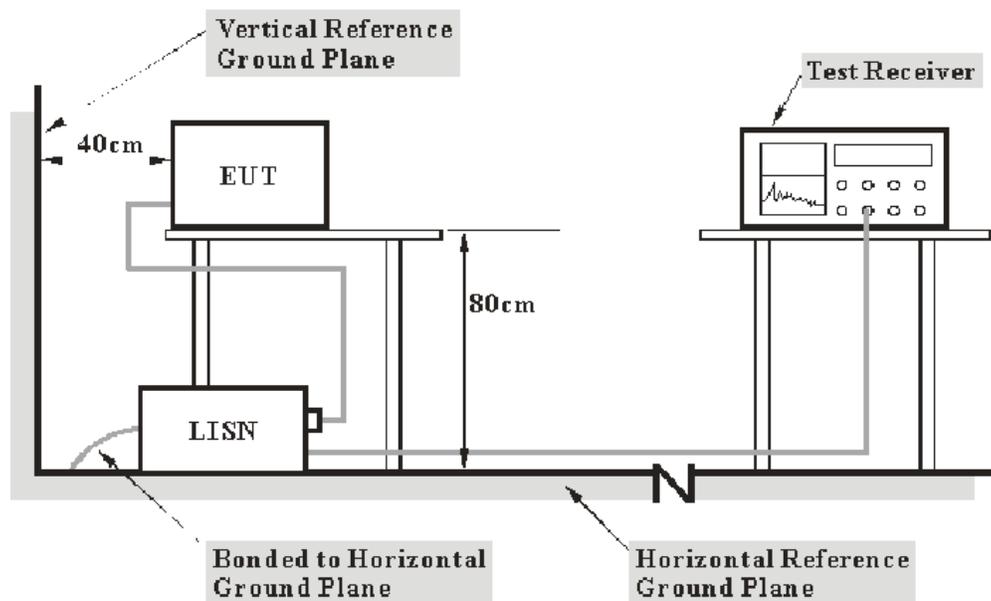

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.107 Class B limits.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>IF B/W</i>
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2011-03-03	2012-03-02
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-03-09	2012-03-08

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.107, with the worst margin reading of:

14.30 dB at 0.230 MHz in the **Neutral** conducted mode

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa

The testing was performed by Allan An on 2011-08-16


Test mode: Operating

120 V, 60 Hz, Line:

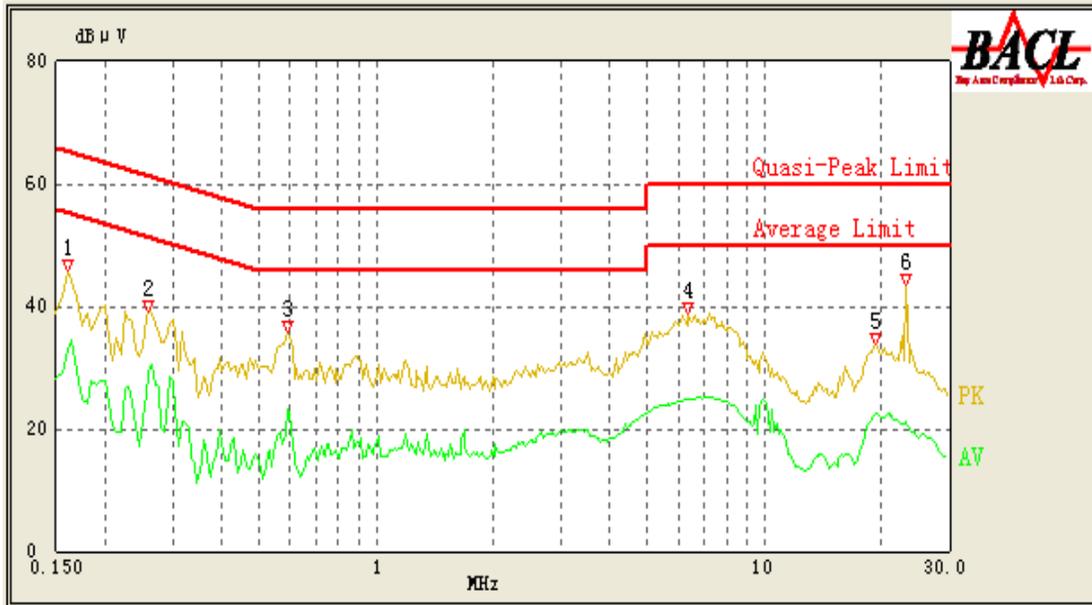

Conducted Emissions			FCC Part 15.107, Class B		
Frequency (MHz)	Corrected Result (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Remark (PK/ QP/Ave.)
23.230	43.38	10.10	60.00	16.62	QP
0.160	45.70	10.10	65.71	20.01	QP
0.590	35.86	10.10	56.00	20.14	QP
6.385	38.68	10.10	60.00	21.32	QP
0.160	32.98	10.10	55.71	22.73	Ave.
0.590	23.07	10.10	46.00	22.93	Ave.
0.260	39.30	10.10	62.86	23.56	QP
0.260	29.07	10.10	52.86	23.79	Ave.
6.425	24.77	10.10	50.00	25.23	Ave.
19.285	33.67	10.10	60.00	26.33	QP
19.225	22.34	10.10	50.00	27.66	Ave.
23.230	21.08	10.10	50.00	28.92	Ave.

120 V, 60 Hz, Neutral:

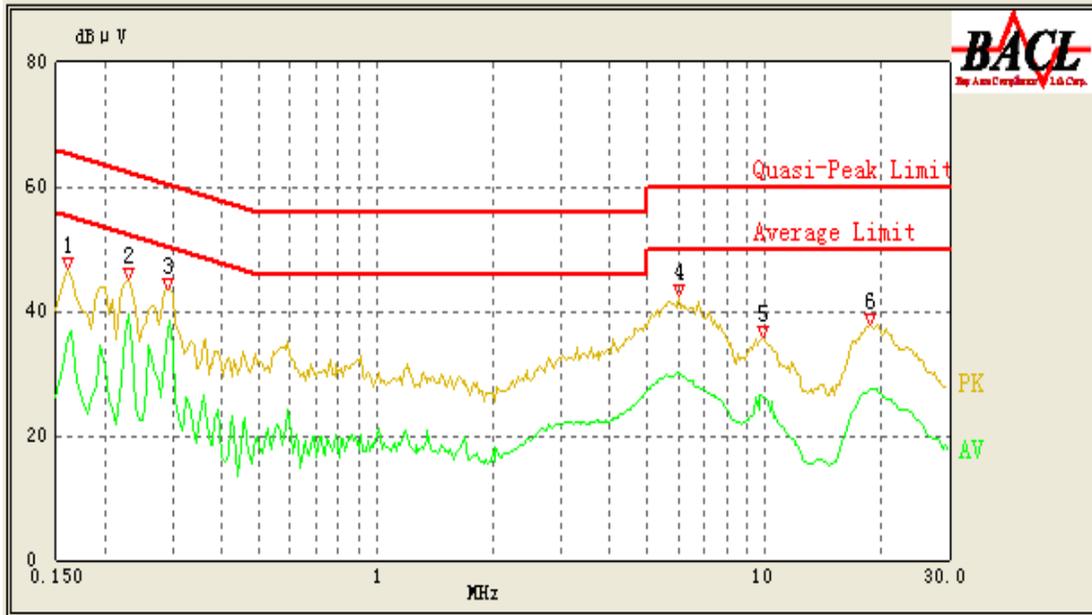

Conducted Emissions			FCC Part 15.107, Class B		
Frequency (MHz)	Corrected Result (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Remark (PK/ QP/Ave.)
0.230	39.41	10.10	53.71	14.30	Ave.
0.290	36.90	10.10	52.00	15.10	Ave.
6.000	42.63	10.10	60.00	17.37	QP
0.290	43.53	10.10	62.00	18.47	QP
0.230	45.15	10.10	63.71	18.56	QP
0.160	46.71	10.10	65.71	19.00	QP
6.000	30.05	10.10	50.00	19.95	Ave.
0.160	35.71	10.10	55.71	20.00	Ave.
18.685	37.91	10.10	60.00	22.09	QP
18.685	27.48	10.10	50.00	22.52	Ave.
9.865	26.29	10.10	50.00	23.71	Ave.
9.865	35.86	10.10	60.00	24.14	QP

FCC §15.109 - RADIATED EMISSIONS


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 4.0 dB. (k=2, 95% level of confidence)

EUT Setup

Below 1 GHz:

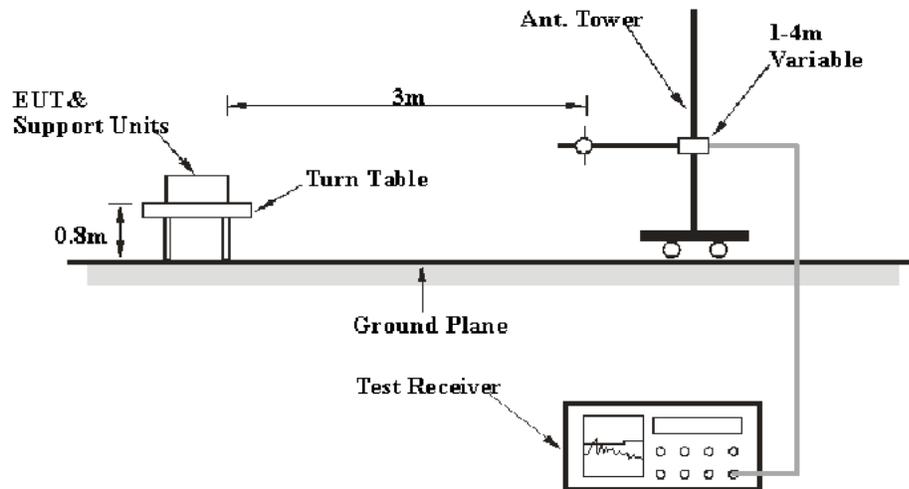

Above 1 GHz:

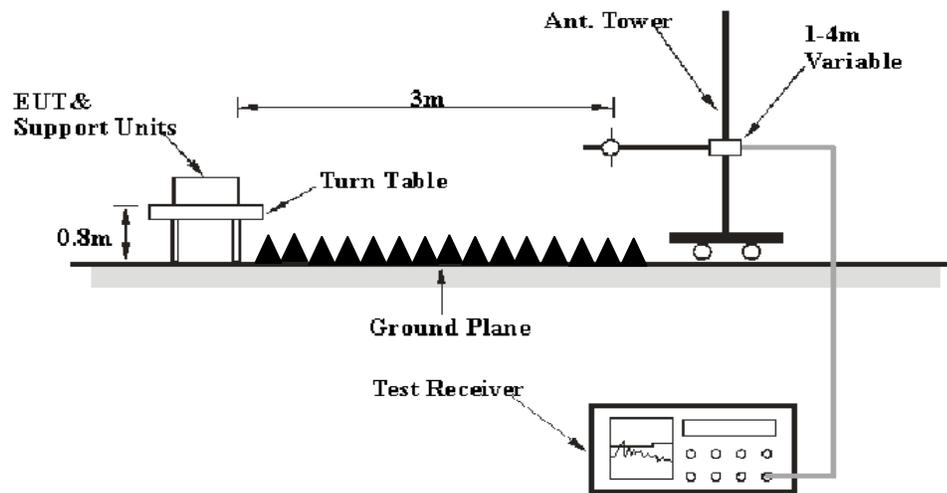

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part 15.109, Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 2 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>	<i>Detector</i>
30MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 2 GHz	1 MHz	3 MHz	PK
1000 MHz – 2 GHz	1 MHz	10 Hz	Ave.

Test Procedure

For the radiated emissions test, the adapter was connected to AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2011-08-02	2012-08-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2011-03-11	2012-03-10
Mini-circuits	Pre-Amplifier	ZVA-213+	T-E27H	2011-03-08	2012-03-07
Sunol Sciences	Horn Antenna	DRH-118	A052604	2011-05-05	2012-05-04
Rohde & Schwarz	Signal Analyzer	FSIQ 26	609358	2011-07-08	2012-07-07

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp (Shenzhen). attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.109 Class B, with the worst margin reading of:

0.8 dB at 499.999250 MHz in the Vertical polarization

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa

The testing was performed by Allan An on 2011-08-16.

Test Mode: Operating

1) Below 1 GHz:

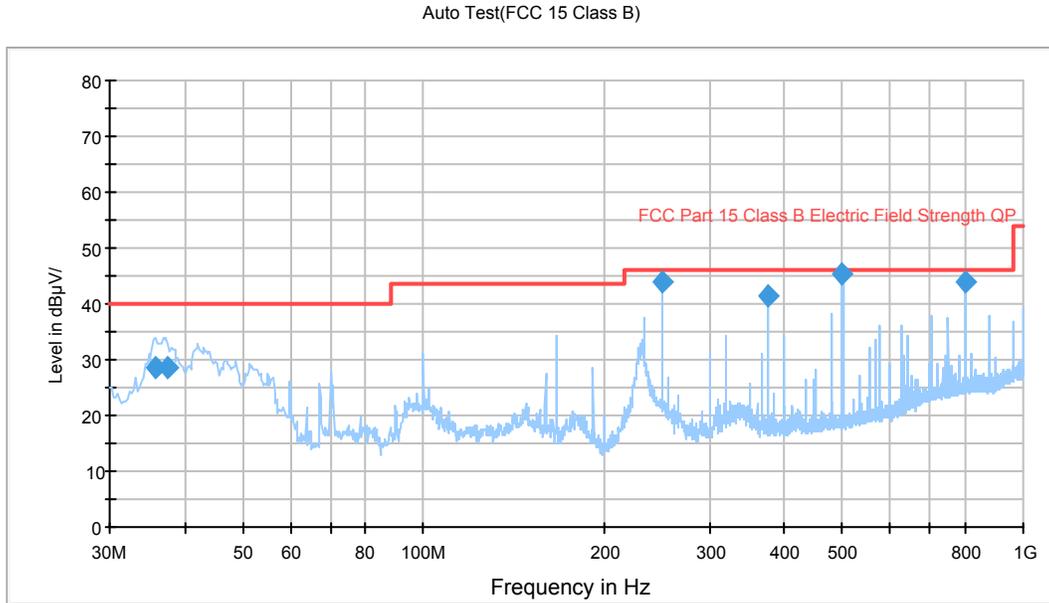

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Test Antenna		Turntable Position (degree)	Limit (dBµV/m)	Margin (dB)
		Height (cm)	Polarity (H/V)			
499.999250	45.2	100.0	V	171.0	46.0	0.8*
250.009000	43.9	133.0	H	310.0	46.0	2.1*
799.996000	43.9	100.0	H	188.0	46.0	2.1*
375.006750	41.3	151.0	V	206.0	46.0	4.7
37.445750	28.6	100.0	V	94.0	40.0	11.4
35.650000	28.4	100.0	V	129.0	40.0	11.6

*Within measurement uncertainty!

2) Above 1 GHz:

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (V/H)	Turntable Azimuth (degrees)	Limit (dBµV/m)	Margin (dB)
/	/	/	/	/	/	/

Note: For above 1 GHz, emissions were below 20 dB of limit and were not recorded.

***** END OF REPORT *****