



SPORTON International Inc.

No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.
Ph: 886-3-656-9065 / FAX: 886-3-656-9085 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	ZTE Corporation
Applicant Address	ZTE Plaza, Hi-tech Park, Nanshan District, Shenzhen, Guangdong, 518057 China
FCC ID	Q78-ZXWLW822E
Manufacturer's company	ZTE Corporation
Manufacturer Address	ZTE Plaza, Hi-tech Park, Nanshan District, Shenzhen, Guangdong, 518057 China

Product Name	Indoor Wireless AP
Brand Name	ZTE
Model No.	ZXWL W822E
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Received Date	Aug. 07, 2013
Final Test Date	Sep. 05, 2013
Submission Type	Original Equipment

Statement

Test result included is only for the IEEE 802.11n, IEEE 802.11b/g part and IEEE 802.11a (5725 ~ 5850MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009**,

47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r01 and KDB 662911 D01 v02.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE.....	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION.....	3
3.1. Product Details	3
3.2. Accessories	4
3.3. Table for Filed Antenna	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	7
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units	9
3.8. Table for Parameters of Test Software Setting	10
3.9. EUT Operation during Test.....	10
3.10. Duty Cycle.....	11
3.11. Test Configurations.....	15
4. TEST RESULT.....	20
4.1. AC Power Line Conducted Emissions Measurement	20
4.2. Maximum Conducted Output Power Measurement.....	26
4.3. Power Spectral Density Measurement.....	29
4.4. 6dB Spectrum Bandwidth Measurement	37
4.5. Radiated Emissions Measurement.....	44
4.6. Emissions Measurement.....	72
4.7. Antenna Requirements	99
5. LIST OF MEASURING EQUIPMENTS	100
6. TEST LOCATION.....	102
7. MEASUREMENT UNCERTAINTY.....	103
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A20
APPENDIX B. TEST PHOTOS	B1 ~ B5
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE	C1 ~ C3
APPENDIX D. CO-LOCATION REPORT	D1 ~ D3

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR380712AA	Rev. 01	Initial issue of report	Sep. 18, 2013

1. CERTIFICATE OF COMPLIANCE

Product Name : Indoor Wireless AP
Brand Name : ZTE
Model No. : ZXWL W822E
Applicant : ZTE Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Aug. 07, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	14.19 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	0.64 dB
4.3	15.247(e)	Power Spectral Density	Complies	4.11 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	3.02 dB
4.6	15.247(d)	Band Edge Emissions	Complies	1.09 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter or PoE
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	<u>For 2.4GHz Band:</u> 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth <u>For 5GHz Band:</u> 5 for 20MHz bandwidth ; 2 for 40MHz bandwidth
Channel Band Width (99%)	<u>For 2.4GHz Band:</u> MCS0 (20MHz): 17.84 MHz ; MCS0 (40MHz): 36.32 MHz <u>For 5GHz Band:</u> MCS0 (20MHz): 18.08 MHz ; MCS0 (40MHz): 36.64 MHz
Maximum Conducted Output Power	<u>For 2.4GHz Band:</u> MCS0 (20MHz): 22.97 dBm ; MCS0 (40MHz): 19.99 dBm <u>For 5GHz Band:</u> MCS0 (20MHz): 28.86 dBm ; MCS0 (40MHz): 29.36 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

802.11a/b/g

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter or PoE
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11a/g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	11b/g: 11 ; 11a: 5
Channel Band Width (99%)	11b: 9.92 MHz ; 11g: 16.56 MHz ; 11a: 16.40 MHz
Maximum Conducted Output Power	11b: 25.94 dBm ; 11g: 23.12 dBm ; 11a: 27.70 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna and Band width

Antenna	Three (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11a	V	X
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V

IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23
Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40. Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n		

3.2. Accessories

Power	Brand	Model No.	Rating
Adapter	MOSO	MSP-C2000IC12.0-24W-US	Input: 100-240Vac, 50/60Hz, 0.8A max. Output: 12.0Vdc, 2A

3.3. Table for Filed Antenna

Ant.	Brand	Model No.	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	MAG.LAYERS	EDA-2010-2G4R2-A1-EV	Dipole Antenna	SMA Male RP	5.0	-
2	MAG.LAYERS	EDA-2010-5G0R2-A1-EV	Dipole Antenna	SMA Male RP	-	5.0

Note: The EUT has total antennas amounted to two sets.

Ant. 1 supports 2.4GHz WLAN function only, and Ant. 2 supports 5GHz WLAN function only.

<For 2.4GHz Band:>


For IEEE 802.11b/g/n mode (3TX/3RX):

Chain 1, Chain 2 and Chain 3 could transmit/receive simultaneously.

<For 5GHz Band:>

For IEEE 802.11a/n mode (3TX/3RX):

Chain 4, Chain 5 and Chain 6 could transmit/receive simultaneously.

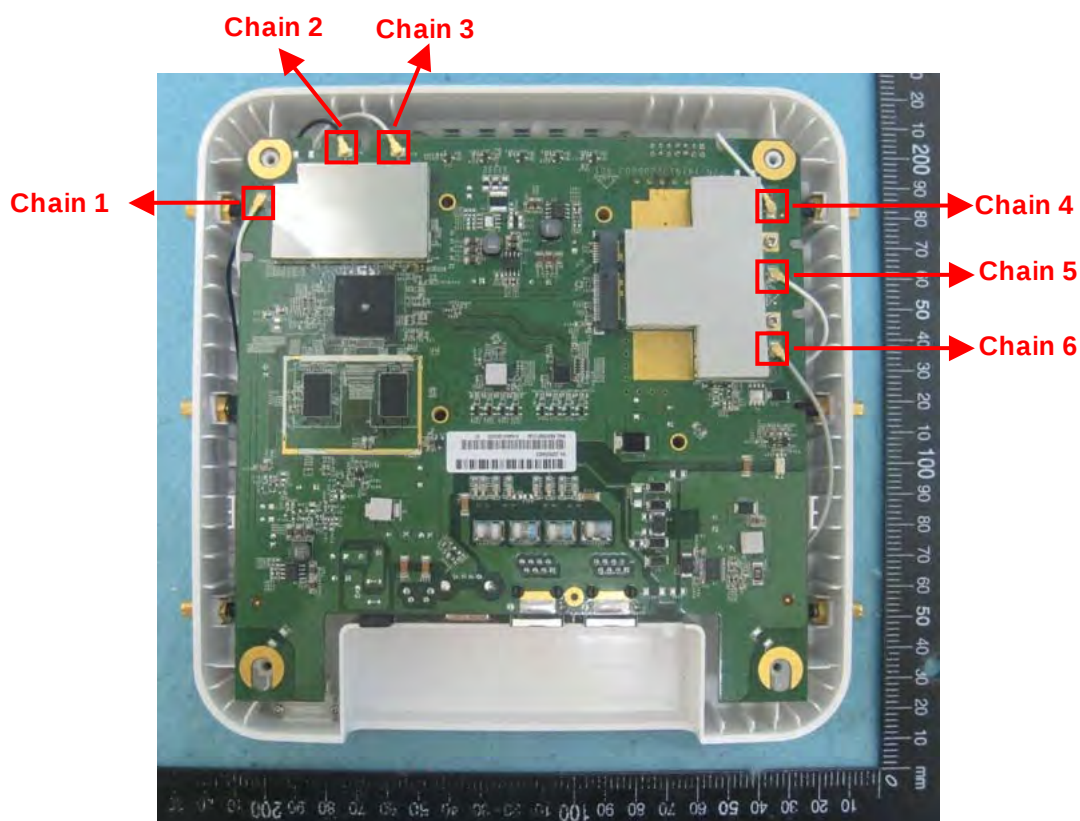

3.4. Table for Carrier Frequencies

For 2.4GHz Band:

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

For 5GHz Band:

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz Band 4	149	5745 MHz	159	5795 MHz
	151	5755 MHz	161	5805 MHz
	153	5765 MHz	165	5825 MHz
	157	5785 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

For 2.4GHz Band

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11n 20MHz	MCS0	1/6/11	1+2+3
	11n 40MHz	MCS0	3/6/9	1+2+3
	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
Power Spectral Density	11n 20MHz	MCS0	1/6/11	1+2+3
	11n 40MHz	MCS0	3/6/9	1+2+3
	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
6dB Spectrum Bandwidth	11n 20MHz	MCS0	1/6/11	1+2+3
	11n 40MHz	MCS0	3/6/9	1+2+3
	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11n 20MHz	MCS0	1/6/11	1+2+3
	11n 40MHz	MCS0	3/6/9	1+2+3
	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
Band Edge Emissions	11n 20MHz	MCS0	1/6/11	1+2+3
	11n 40MHz	MCS0	3/6/9	1+2+3
	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3

5GHz Band

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11n 20MHz	MCS0	149/157/165	4+5+6
	11n 40MHz	MCS0	151/159	4+5+6
	11a/BPSK	6 Mbps	149/157/165	4+5+6
Power Spectral Density	11n 20MHz	MCS0	149/157/165	4+5+6
	11n 40MHz	MCS0	151/159	4+5+6
	11a/BPSK	6 Mbps	149/157/165	4+5+6
6dB Spectrum Bandwidth	11n 20MHz	MCS0	149/157/165	4+5+6
	11n 40MHz	MCS0	151/159	4+5+6
	11a/BPSK	6 Mbps	149/157/165	4+5+6
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11n 20MHz	MCS0	149/157/165	4+5+6
	11n 40MHz	MCS0	151/159	4+5+6
	11a/BPSK	6 Mbps	149/157/165	4+5+6
Band Edge Emissions	11n 20MHz	MCS0	149/157/165	4+5+6
	11n 40MHz	MCS0	151/159	4+5+6
	11a/BPSK	6 Mbps	149/157/165	4+5+6

The following test modes were performed for all tests:

For AC Power Line Conducted Emissions and Radiated Emissions below 1GHz tests:

Mode 1. EUT + Adapter

Mode 2. EUT + PoE

For Others tests:

Mode. CTX

<For MPE and Co-location Test>:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Maximum Permissible Exposure (Please refer to Appendix C) and Co-location (please refer to Appendix D) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

For AC Power Line Conducted Emissions test:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	QDS-BRCM1049LE
Notebook	DELL	E6430	QDS-BRCM1049LE
Notebook	DELL	E6430	QDS-BRCM1049LE
Notebook	DELL	E6430	QDS-BRCM1049LE
PoE	PowerDsine	PD-6561G300	NA

For Radiated Emissions below 1GHz test:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2K4965AGNM
Notebook	DELL	M1340	E2K4965AGNM
Notebook	DELL	E6430	QDS-BRCM1049LE
Notebook	DELL	D420	E2KWM3945ABG
PoE	PowerDsine	PD-6561G300	NA

For Others tests:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	QDS-BRCM1049LE
PoE	PowerDsine	PD-6561G300	NA

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For 2.4GHz Band

Power Parameters of IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3

Test Software Version	ART2-GUI		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 20MHz	13	16	12

Power Parameters of IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3

Test Software Version	ART2-GUI		
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 40MHz	10.5	13.5	10.5

Power Parameters of IEEE 802.11b/g / Chain 1 + Chain 2 + Chain 3

Test Software Version	ART2-GUI		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	15.5	19.5	18
IEEE 802.11g	12.5	16	13

For 5GHz Band

Power Parameters of IEEE 802.11n MCS0 20MHz / Chain 4 + Chain 5 + Chain 6

Test Software Version	ART2-GUI		
Frequency	5745 MHz	5785 MHz	5825 MHz
MCS0 20MHz	23.5	24.5	21

Power Parameters of IEEE 802.11n MCS0 40MHz / Chain 4 + Chain 5 + Chain 6

Test Software Version	ART2-GUI	
Frequency	5755 MHz	5795 MHz
MCS0 40MHz	22.5	25

Power Parameters of IEEE 802.11a / Chain 4 + Chain 5 + Chain 6

Test Software Version	ART2-GUI		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	22.5	23.5	23


3.9. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.10. Duty Cycle


For 2.4GHz Band:

IEEE 802.11n MCS0 20MHz

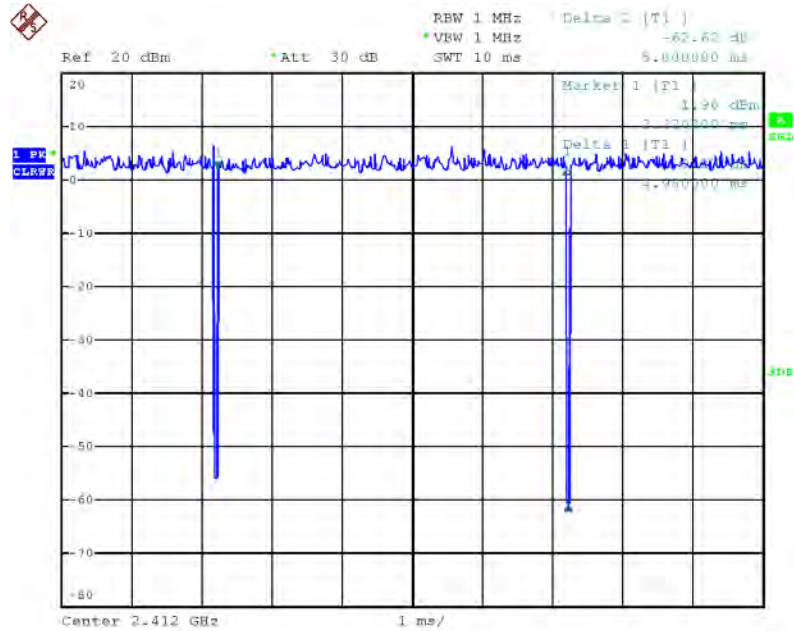


Date: 5.SEP.2013 18:26:03

IEEE 802.11n MCS0 40MHz

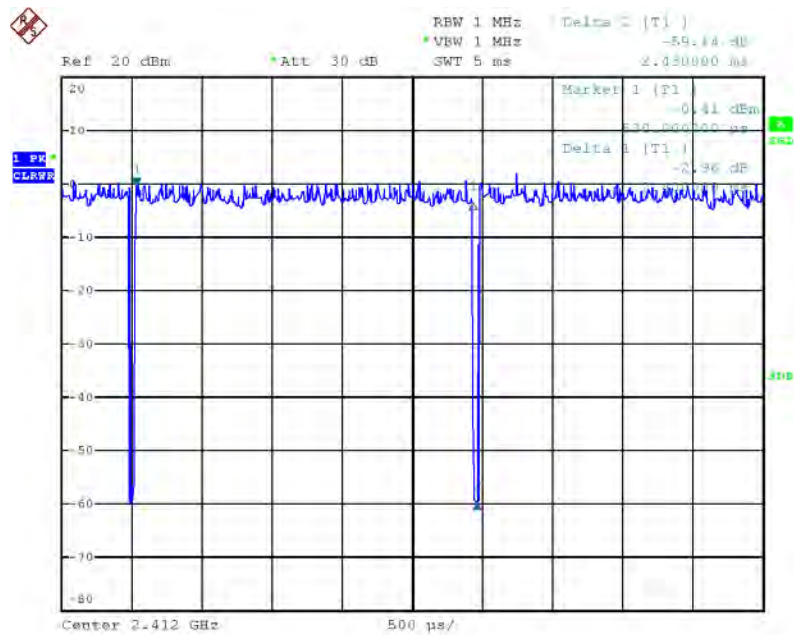


Date: 5.SEP.2013 18:27:13

IEEE 802.11b

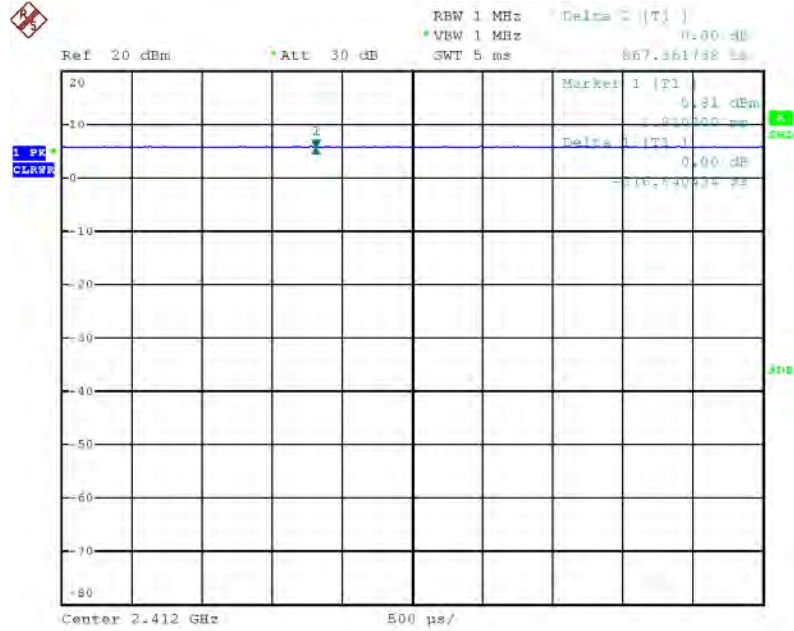


Date: 5.SEP.2013 18:23:45


IEEE 802.11g

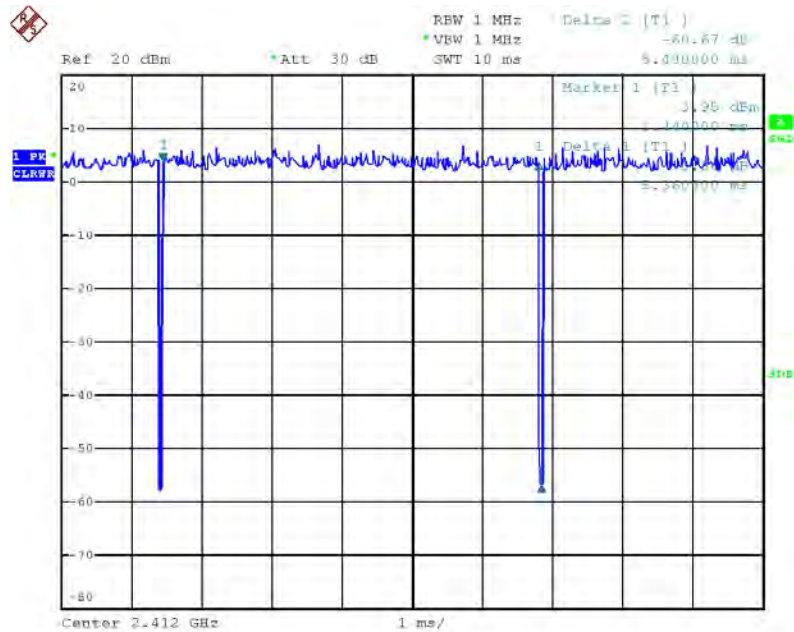

Date: 5.SEP.2013 18:24:56




IEEE 802.11n MCS0 20MHz




Date: 5-SEP-2013 18:07:36

IEEE 802.11a

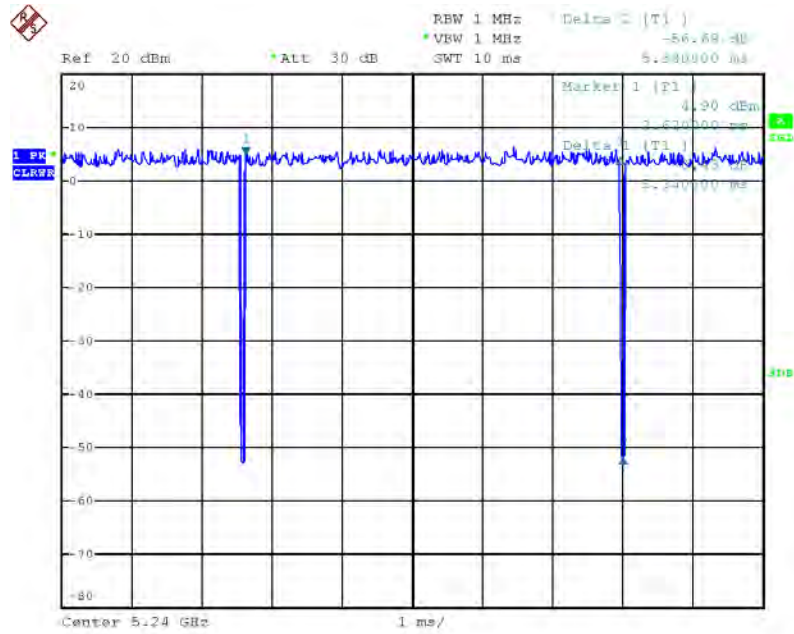

Date: 5.SEP.2013 18:12:03




3.11.1. AC Power Line Conduction Emissions Test Configuration

The diagram illustrates a network architecture. At the top, a box labeled "EUT" is connected to "AC MAIN" via a line labeled "1". A line labeled "3" also connects "AC MAIN" to the right side of the diagram. A dashed line labeled "2" connects the "EUT" to a central point, which then branches out to four boxes at the bottom: "LAN NB", "WLAN NB", "WLAN NB", and "LAN NB". Each of these bottom boxes is connected to a central point via a lightning bolt symbol, indicating a wireless connection. A solid line connects the right side of the "EUT" box to the right side of the diagram, passing through the "WLAN NB" boxes.

Item	Connection	Shielded	Length
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m


Test Mode: Mode 2

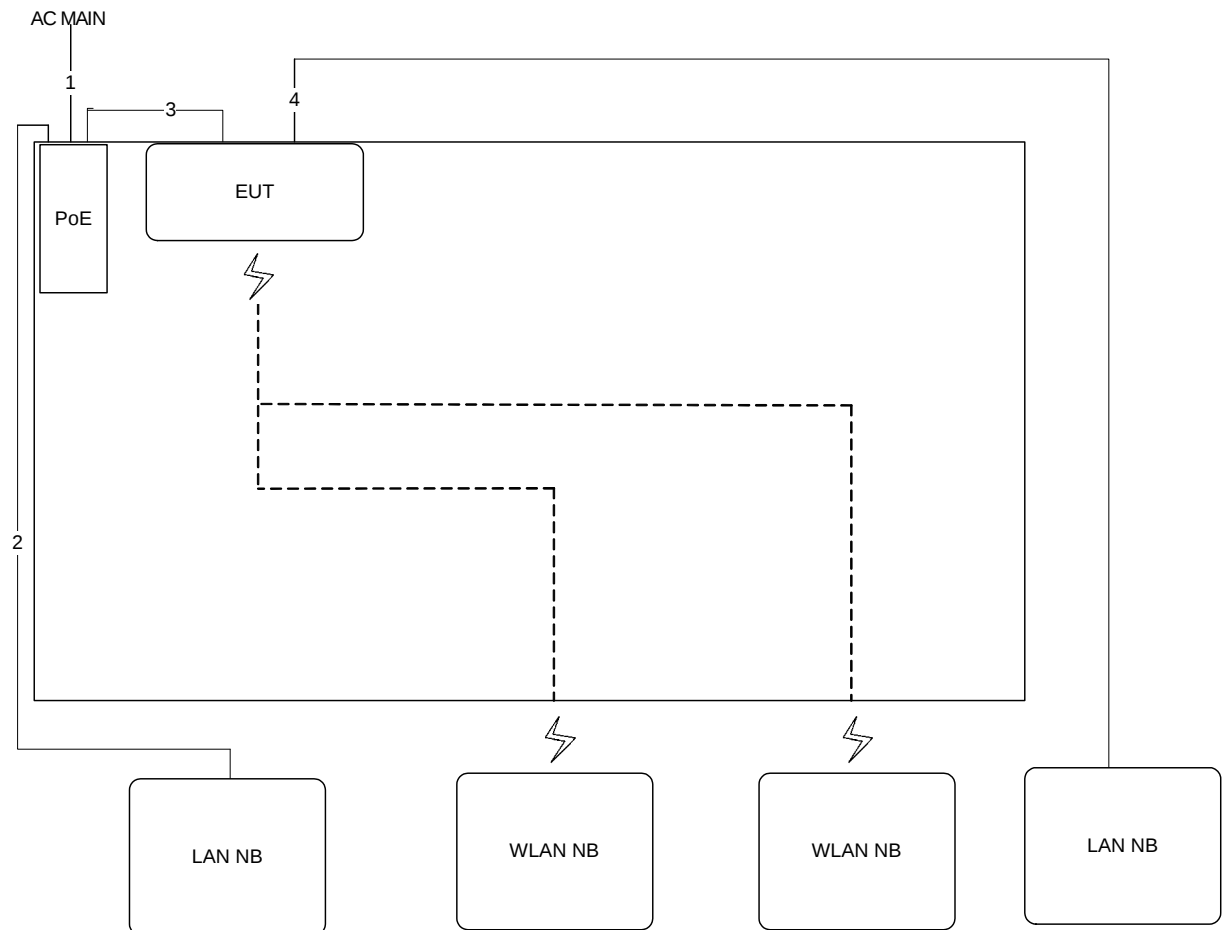

Item	Connection	Shielded	Length
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	1m
4	RJ-45 cable	No	10m


3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz / Test Mode: Mode 1

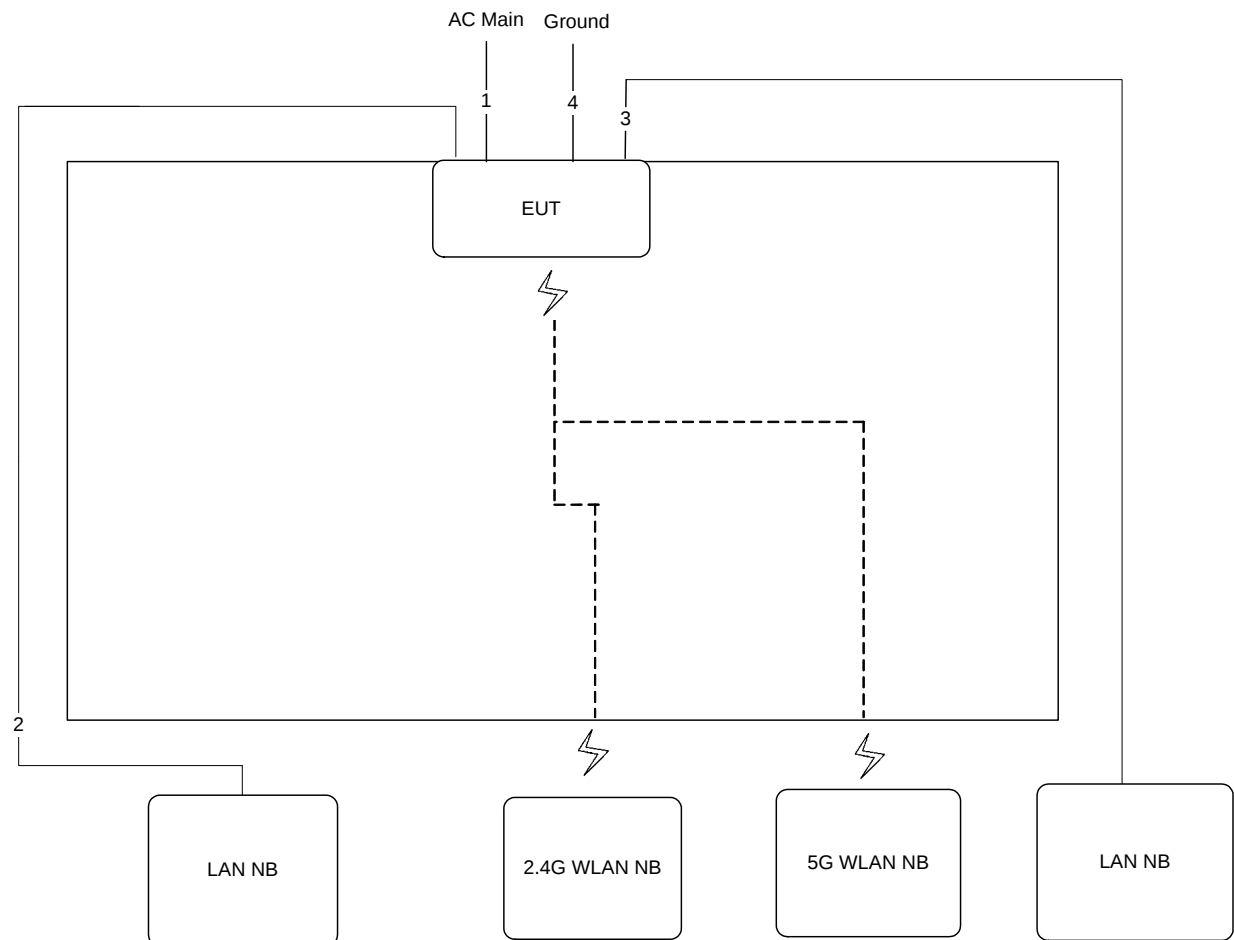


Item	Connection	Shielded	Length
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	Ground cable	No	1.5m

Test Mode: Mode 2

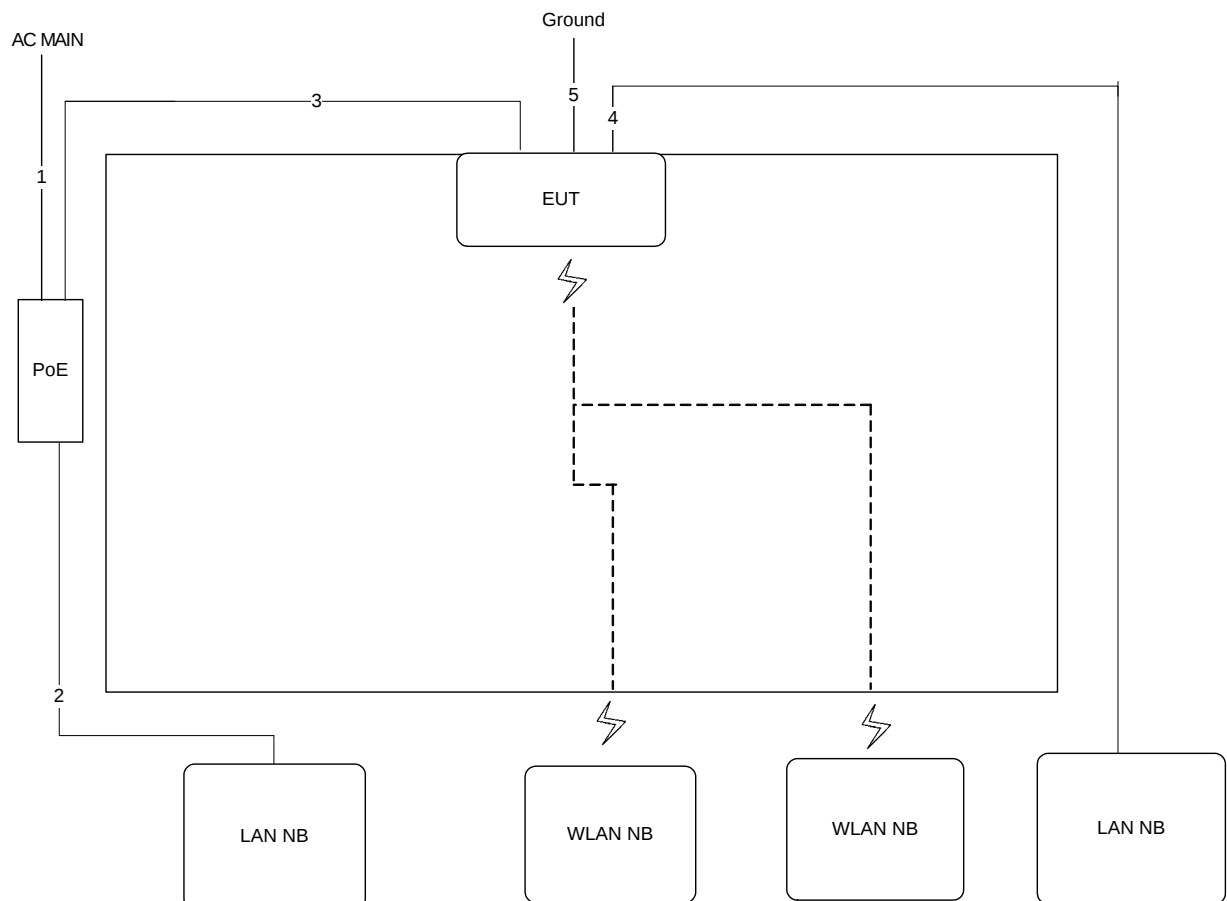

Item	Connection	Shielded	Length
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	1m
4	RJ-45 cable	No	10m
5	Ground cable	No	1.5m

Test Configuration: above 1GHz

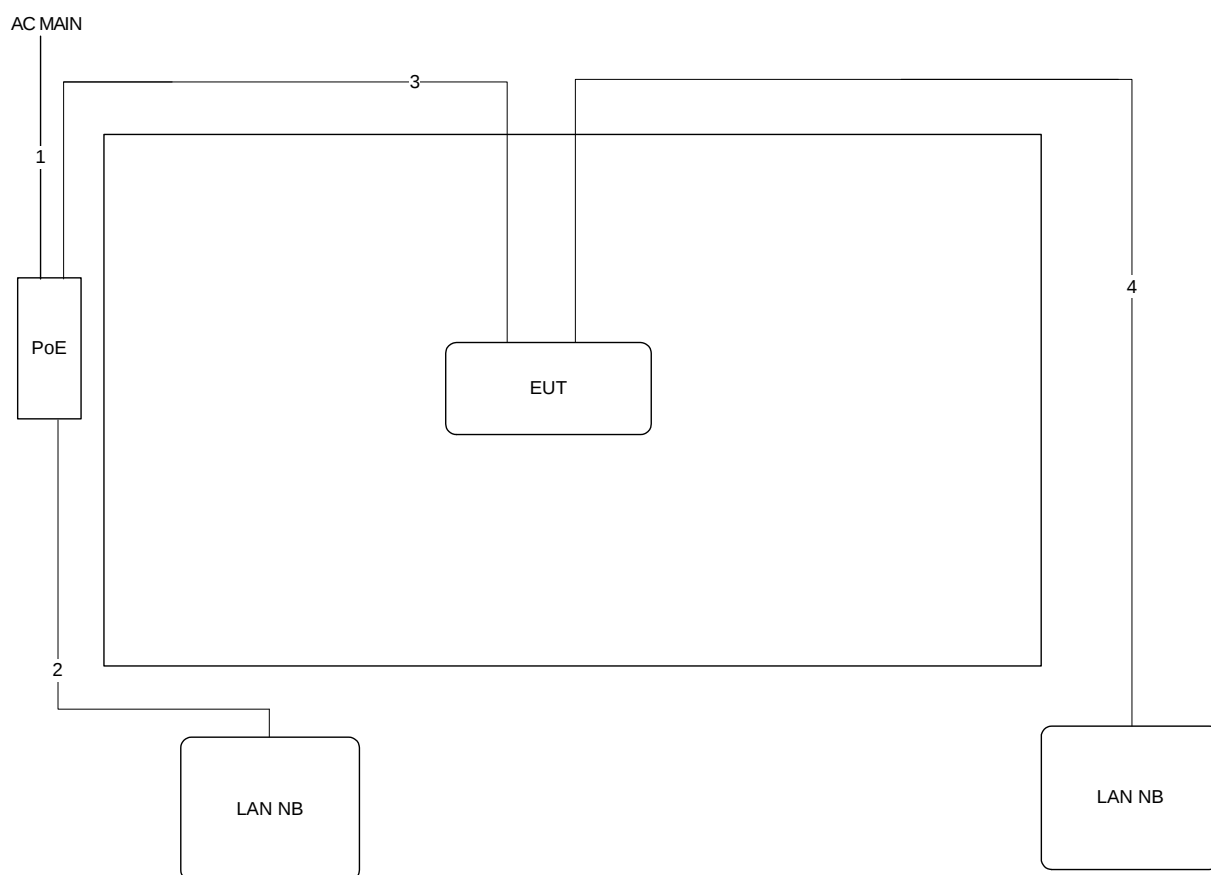

Item	Connection	Shielded	Length
1	Power cable	No	1.8m
2	RJ-45 cable	No	1m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

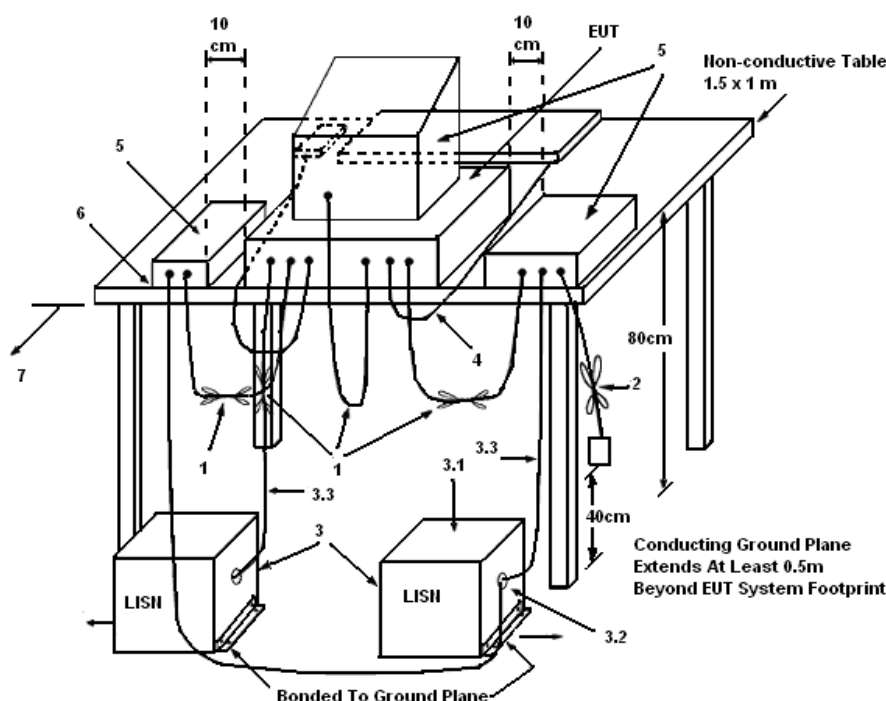

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	55%
Test Engineer	Sollo Luo	Phase	Line
Configuration	Normal Link	Test Mode	Mode 1

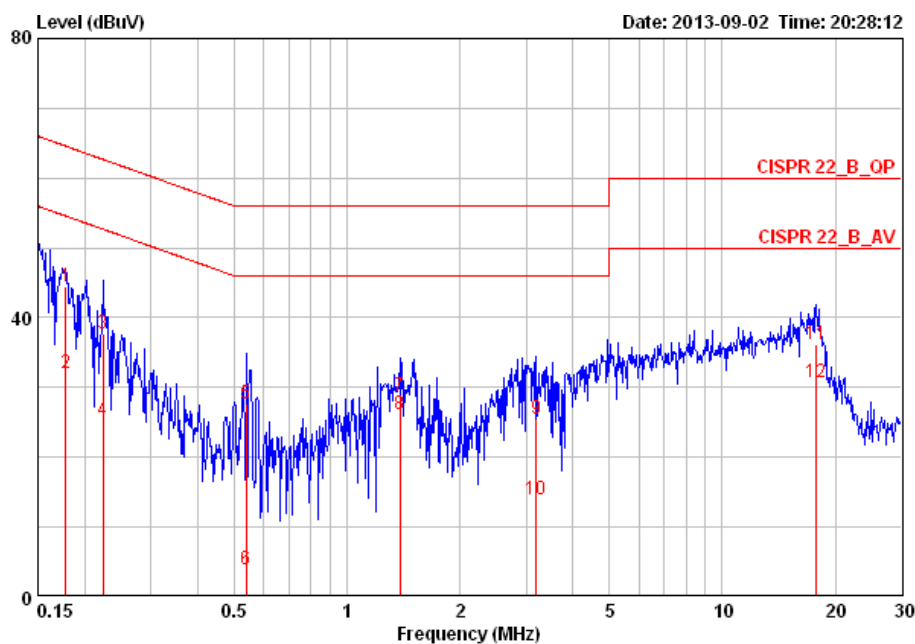

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.17772	44.41	-20.18	64.59	44.07	0.15	0.19	LINE	QP
2	0.17772	32.15	-22.44	54.59	31.81	0.15	0.19	LINE	AVERAGE
3	0.22319	37.61	-25.09	62.70	37.26	0.15	0.20	LINE	QP
4	0.22319	25.29	-27.41	52.70	24.94	0.15	0.20	LINE	AVERAGE
5	0.53782	27.64	-28.37	56.00	27.28	0.16	0.20	LINE	QP
6	0.53782	3.99	-42.02	46.00	3.63	0.16	0.20	LINE	AVERAGE
7	1.381	28.70	-27.30	56.00	28.31	0.18	0.21	LINE	QP
8	1.381	26.12	-19.88	46.00	25.73	0.18	0.21	LINE	AVERAGE
9	3.190	25.49	-30.51	56.00	25.02	0.21	0.26	LINE	QP
10	3.190	13.85	-32.15	46.00	13.38	0.21	0.26	LINE	AVERAGE
11	17.849	36.11	-23.89	60.00	35.19	0.45	0.48	LINE	QP
12	17.849	30.67	-19.33	50.00	29.75	0.45	0.48	LINE	AVERAGE

Temperature	25°C	Humidity	55%
Test Engineer	Sollo Luo	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 1

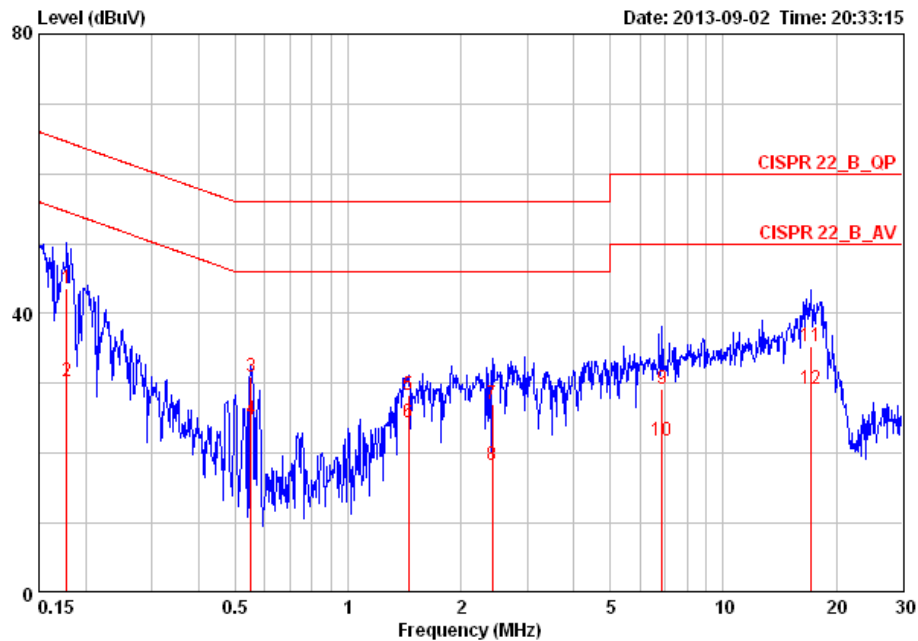


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.17772	43.60	-20.99	64.59	43.33	0.08	0.19	NEUTRAL	QP
2	0.17772	30.23	-24.36	54.59	29.96	0.08	0.19	NEUTRAL	AVERAGE
3	0.55226	30.86	-25.14	56.00	30.58	0.08	0.20	NEUTRAL	QP
4	0.55226	24.92	-21.08	46.00	24.64	0.08	0.20	NEUTRAL	AVERAGE
5	1.449	28.41	-27.59	56.00	28.09	0.10	0.22	NEUTRAL	QP
6	1.449	24.37	-21.63	46.00	24.05	0.10	0.22	NEUTRAL	AVERAGE
7	2.422	27.08	-28.92	56.00	26.73	0.11	0.24	NEUTRAL	QP
8	2.422	18.37	-27.63	46.00	18.02	0.11	0.24	NEUTRAL	AVERAGE
9	6.878	29.24	-30.76	60.00	28.75	0.18	0.30	NEUTRAL	QP
10	6.878	21.91	-28.09	50.00	21.42	0.18	0.30	NEUTRAL	AVERAGE
11	17.199	35.33	-24.67	60.00	34.54	0.35	0.44	NEUTRAL	QP
12	17.199	29.20	-20.80	50.00	28.41	0.35	0.44	NEUTRAL	AVERAGE

Note:


Level = Read Level + LISN Factor + Cable Loss.

Temperature	25°C	Humidity	55%
Test Engineer	Sollo Luo	Phase	Line
Configuration	Normal Link	Test Mode	Mode 2

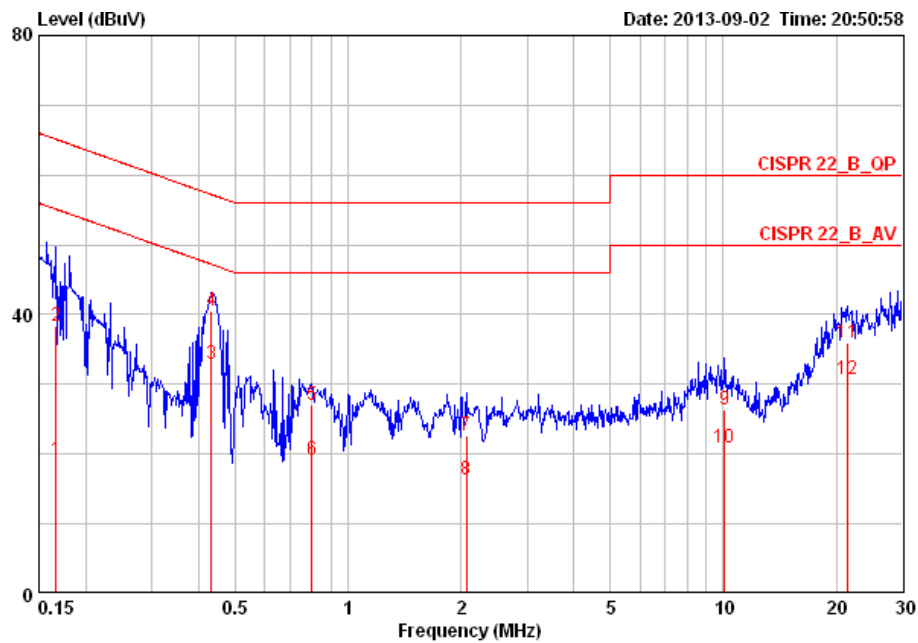

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.16677	19.12	-36.00	55.12	18.77	0.16	0.19	LINE	AVERAGE
2	0.16677	38.33	-26.79	65.12	37.98	0.16	0.19	LINE	QP
3	0.43281	33.01	-14.19	47.20	32.66	0.15	0.20	LINE	AVERAGE
4	0.43281	40.46	-16.74	57.20	40.11	0.15	0.20	LINE	QP
5	0.80023	27.09	-28.91	56.00	26.73	0.16	0.20	LINE	QP
6	0.80023	19.14	-26.86	46.00	18.78	0.16	0.20	LINE	AVERAGE
7	2.066	22.73	-33.27	56.00	22.31	0.19	0.23	LINE	QP
8	2.066	16.34	-29.66	46.00	15.92	0.19	0.23	LINE	AVERAGE
9	10.072	26.32	-33.68	60.00	25.63	0.34	0.35	LINE	QP
10	10.072	20.94	-29.06	50.00	20.25	0.34	0.35	LINE	AVERAGE
11	21.373	35.95	-24.05	60.00	34.94	0.51	0.50	LINE	QP
12	21.373	30.80	-19.20	50.00	29.79	0.51	0.50	LINE	AVERAGE

Temperature	25°C	Humidity	55%
Test Engineer	Sollo Luo	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 2

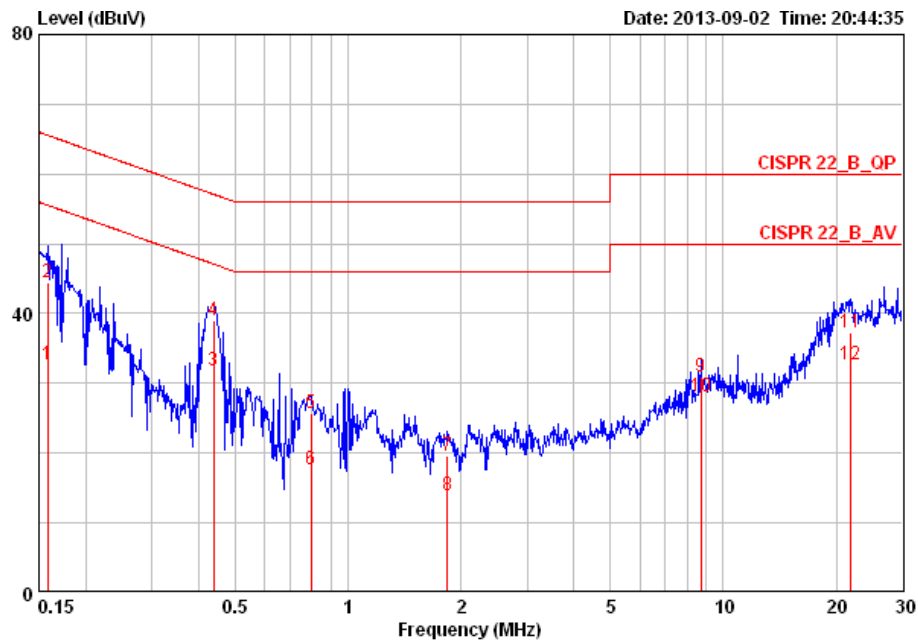

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15816	32.74	-22.82	55.56	32.48	0.08	0.18	NEUTRAL	AVERAGE
2	0.15816	44.46	-21.10	65.56	44.20	0.08	0.18	NEUTRAL	QP
3	0.43742	31.82	-15.29	47.11	31.54	0.08	0.20	NEUTRAL	AVERAGE
4	0.43742	39.04	-18.07	57.11	38.76	0.08	0.20	NEUTRAL	QP
5	0.79601	25.75	-30.25	56.00	25.46	0.09	0.20	NEUTRAL	QP
6	0.79601	17.62	-28.38	46.00	17.33	0.09	0.20	NEUTRAL	AVERAGE
7	1.839	19.72	-36.28	56.00	19.39	0.11	0.23	NEUTRAL	QP
8	1.839	13.97	-32.03	46.00	13.64	0.11	0.23	NEUTRAL	AVERAGE
9	8.721	30.96	-29.04	60.00	30.44	0.22	0.30	NEUTRAL	QP
10	8.721	28.14	-21.86	50.00	27.62	0.22	0.30	NEUTRAL	AVERAGE
11	21.830	37.30	-22.70	60.00	36.37	0.43	0.50	NEUTRAL	QP
12	21.830	32.61	-17.39	50.00	31.68	0.43	0.50	NEUTRAL	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter output power.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r01 section 9.2.2 Measurement using a power meter (PM).
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

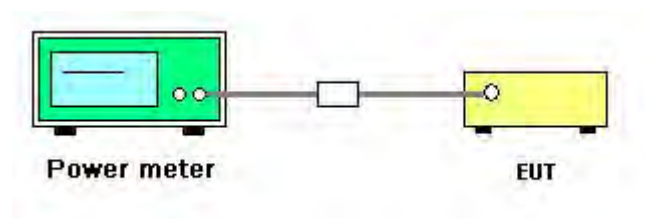

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	24°C	Humidity	61%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11n
Test Date	Sep. 05, 2013		

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	14.86	15.05	14.93	19.72	30.00	Complies
6	2437 MHz	18.15	18.23	18.21	22.97	30.00	Complies
11	2462 MHz	13.92	14.16	14.15	18.85	30.00	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
3	2422 MHz	12.72	12.81	12.76	17.53	30.00	Complies
6	2437 MHz	15.12	15.31	15.21	19.99	30.00	Complies
9	2452 MHz	12.11	12.53	12.46	17.14	30.00	Complies

For 5GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 4	Chain 5	Chain 6	Total		
149	5745 MHz	23.46	22.51	22.84	27.73	30.00	Complies
157	5785 MHz	24.35	23.86	24.03	28.86	30.00	Complies
165	5825 MHz	20.86	19.51	20.59	25.13	30.00	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 4	Chain 5	Chain 6	Total		
151	5755 MHz	23.23	21.95	22.36	27.32	30.00	Complies
159	5795 MHz	24.98	24.16	24.59	29.36	30.00	Complies

Temperature	24°C	Humidity	61%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11a/b/g
Test Date	Sep. 05, 2013		

Configuration IEEE 802.11b / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	17.03	17.26	17.18	21.93	30.00	Complies
6	2437 MHz	21.09	21.25	21.15	25.94	30.00	Complies
11	2462 MHz	19.23	19.48	19.45	24.16	30.00	Complies

Configuration IEEE 802.11g / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	14.61	14.82	14.62	19.46	30.00	Complies
6	2437 MHz	18.21	18.59	18.23	23.12	30.00	Complies
11	2462 MHz	15.06	15.21	15.27	19.95	30.00	Complies

Configuration IEEE 802.11a / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 4	Chain 5	Chain 6	Total		
149	5745 MHz	22.51	21.59	21.96	26.81	30.00	Complies
157	5785 MHz	23.16	22.53	23.06	27.70	30.00	Complies
165	5825 MHz	22.58	22.46	22.69	27.35	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r01 section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

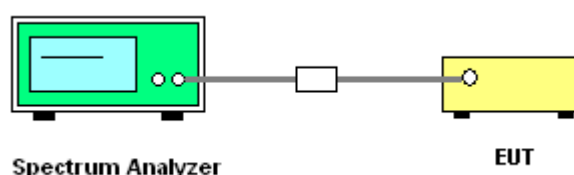

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	24°C	Humidity	61%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11n

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	-11.19	-10.64	-12.01	-6.47	8.00	Complies
6	2437 MHz	-8.61	-7.20	-8.53	-3.29	8.00	Complies
11	2462 MHz	-12.62	-12.65	-12.52	-7.83	8.00	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
3	2422 MHz	-16.46	-14.71	-16.41	-11.01	8.00	Complies
6	2437 MHz	-9.62	-13.22	-13.63	-6.99	8.00	Complies
9	2452 MHz	-15.76	-17.93	-17.60	-12.22	8.00	Complies

For 5GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 4	Chain 5	Chain 6	Total		
149	5745 MHz	-2.68	-2.85	-3.41	1.80	8.00	Complies
157	5785 MHz	-2.17	-2.12	-2.24	2.59	8.00	Complies
165	5825 MHz	-4.22	-4.22	-3.94	0.65	8.00	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 4	Chain 5	Chain 6	Total		
151	5755 MHz	-6.81	-6.66	-8.06	-2.36	8.00	Complies
159	5795 MHz	-4.47	-4.18	-4.92	0.26	8.00	Complies

Temperature	24°C	Humidity	61%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11a/b/g

Configuration IEEE 802.11b / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	-4.33	-5.74	-6.13	-0.56	8.00	Complies
6	2437 MHz	-1.46	0.24	-1.69	3.89	8.00	Complies
11	2462 MHz	-3.35	-2.77	-2.99	1.74	8.00	Complies

Configuration IEEE 802.11g / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	-11.94	-10.56	-12.01	-6.68	8.00	Complies
6	2437 MHz	-7.92	-8.52	-7.81	-3.30	8.00	Complies
11	2462 MHz	-10.17	-11.30	-10.78	-5.95	8.00	Complies


Configuration IEEE 802.11a / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 4	Chain 5	Chain 6	Total		
149	5745 MHz	-1.88	-1.84	-3.33	2.47	8.00	Complies
157	5785 MHz	-2.35	-2.31	-2.29	2.45	8.00	Complies
165	5825 MHz	-2.90	-2.00	-2.28	2.39	8.00	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz / Chain 2

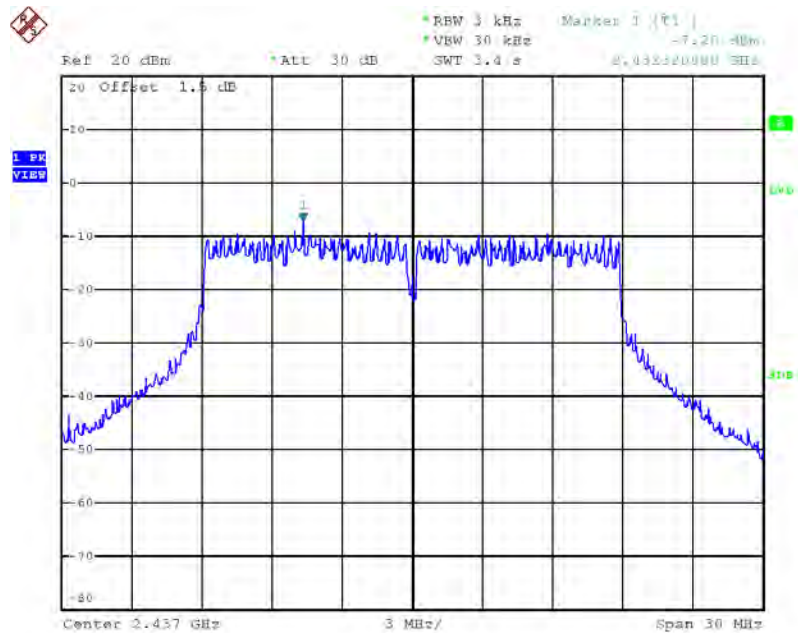


Date: 5.SEP.2013 22:01:59

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz / Chain 1

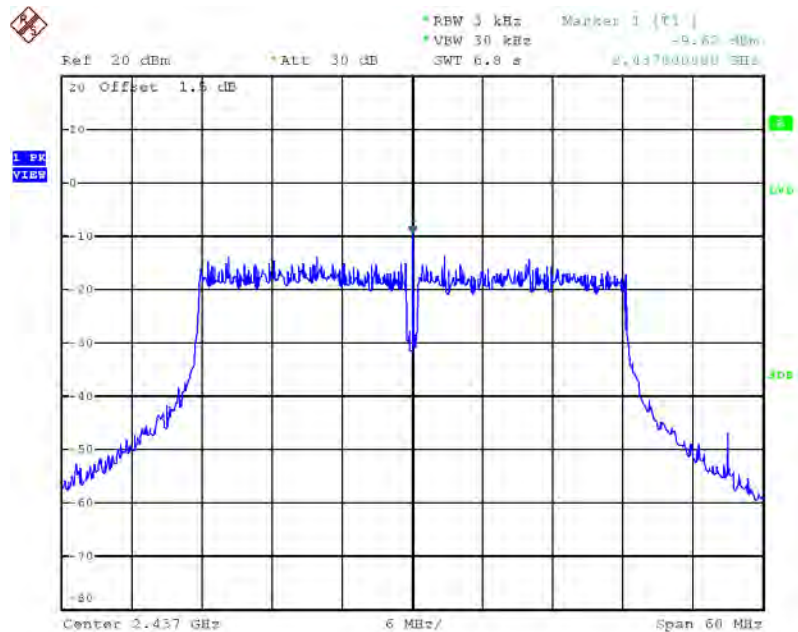


Date: 5.SEP.2013 22:09:10

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 5785 MHz / Chain 5

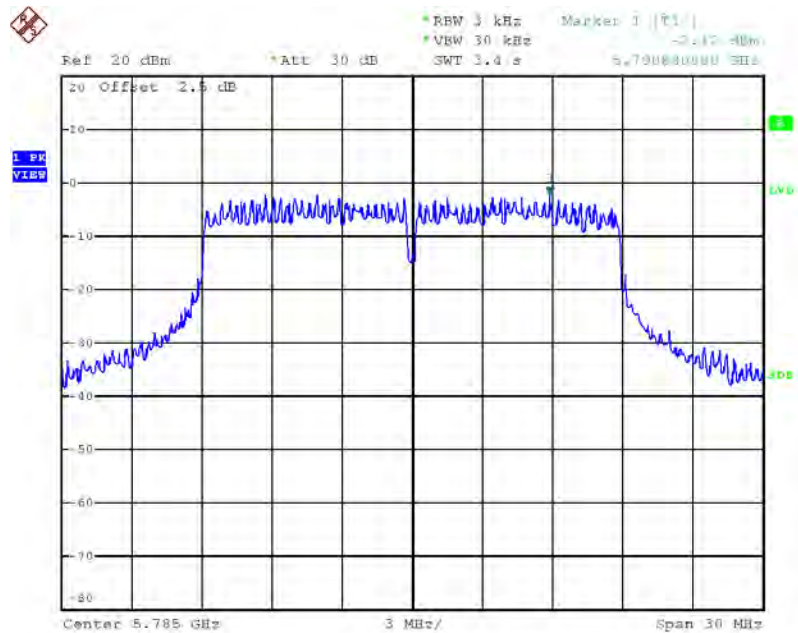

Date: 5.SEP.2013 21:26:47

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 5795 MHz / Chain 5

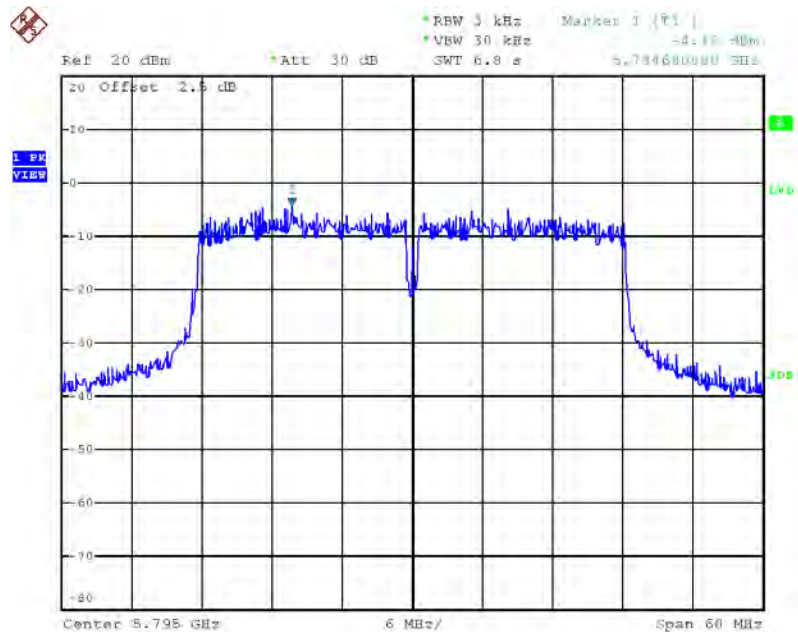


Date: 5.SEP.2013 21:35:35

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2




Date: 5.SEP.2013 21:46:27

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3

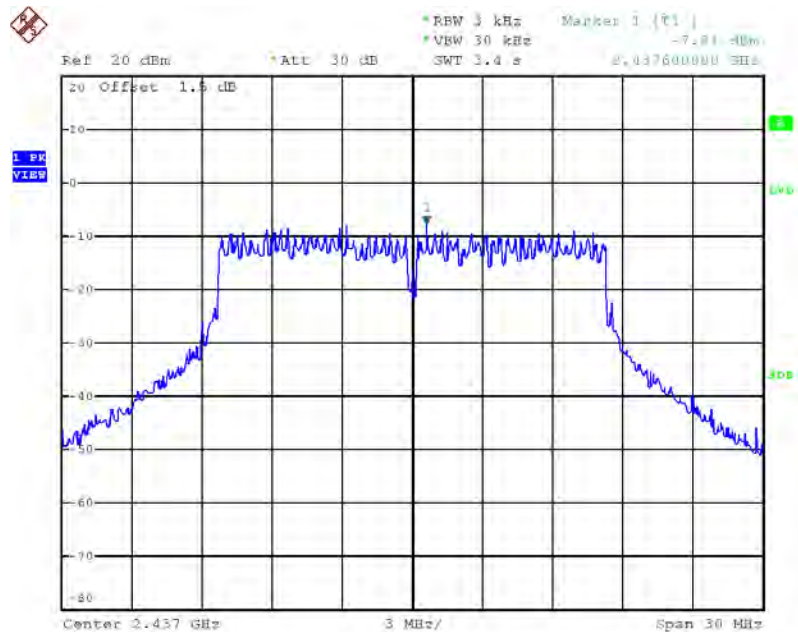

Date: 5.SEP.2013 21:55:07

Power Density Plot on Configuration IEEE 802.11a / 5745 MHz / Chain 5

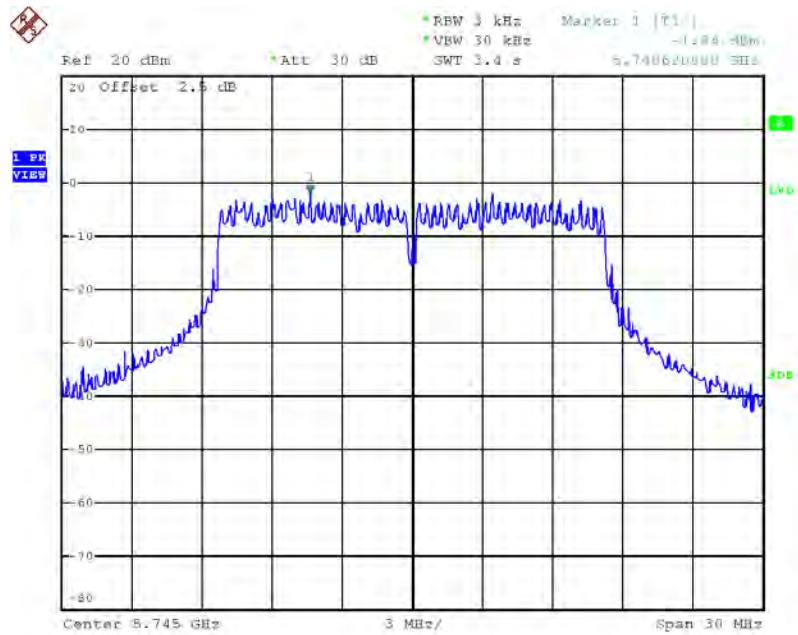

Date: 5.SEP.2013 21:12:39

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 D01 v03r01 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8.0 DTS 6-dB signal bandwidth option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

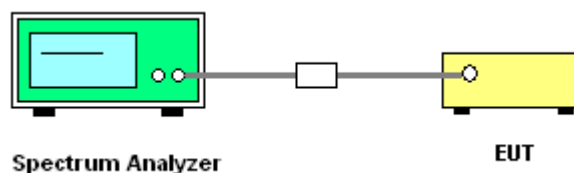

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	24°C	Humidity	61%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11n

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	14.88	17.84	500	Complies
6	2437 MHz	15.68	17.52	500	Complies
11	2462 MHz	16.32	17.76	500	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	32.64	36.16	500	Complies
6	2437 MHz	34.56	36.16	500	Complies
9	2452 MHz	34.72	36.32	500	Complies

For 5GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	14.88	17.92	500	Complies
157	5785 MHz	17.68	18.08	500	Complies
165	5825 MHz	17.68	17.84	500	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	32.16	35.84	500	Complies
159	5795 MHz	32.00	36.64	500	Complies

Temperature	24°C	Humidity	61%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11a/b/g

Configuration IEEE 802.11b / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	4.56	8.24	500	Complies
6	2437 MHz	5.04	9.84	500	Complies
11	2462 MHz	4.56	9.92	500	Complies

Configuration IEEE 802.11g / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.00	15.56	500	Complies
6	2437 MHz	15.44	16.56	500	Complies
11	2462 MHz	15.76	16.56	500	Complies


Configuration IEEE 802.11a / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	12.64	16.40	500	Complies
157	5785 MHz	11.44	16.32	500	Complies
165	5825 MHz	13.60	16.40	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 2412 MHz / Chain 1 + Chain 2 + Chain 3

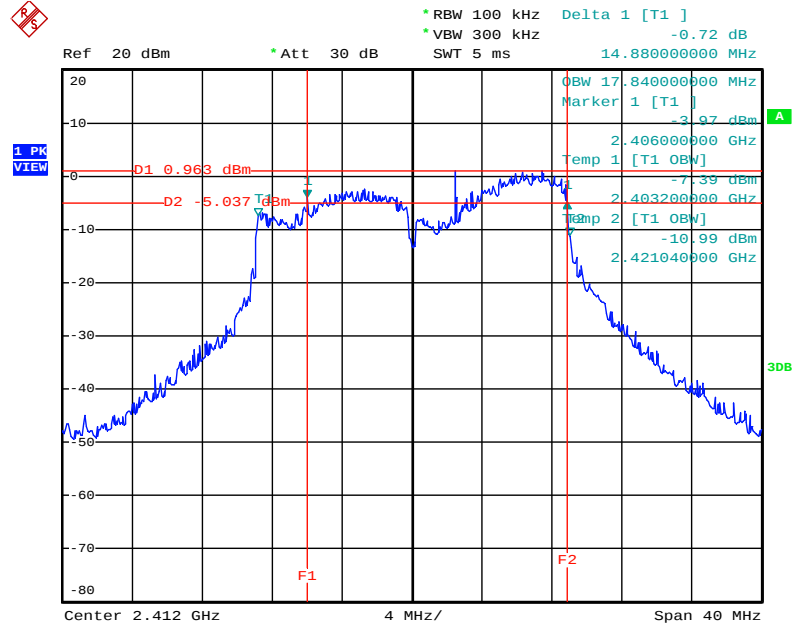


Date: 5.SEP.2013 18:48:13

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz / Chain 1 + Chain 2 + Chain 3

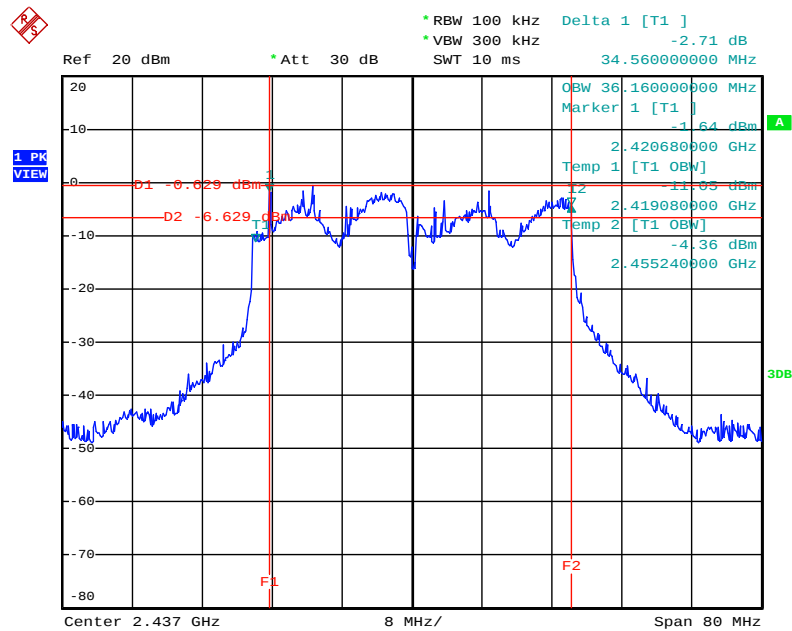


Date: 5.SEP.2013 18:56:37

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 5745 MHz / Chain 4 + Chain 5 + Chain 6

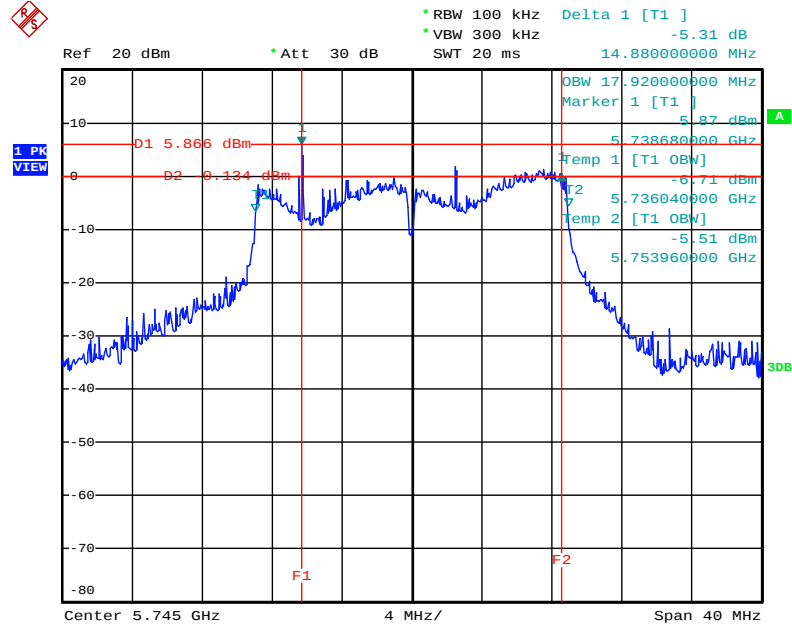


Date: 5.SEP.2013 19:08:22

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / 5795MHz / Chain 4 + Chain 5 + Chain 6

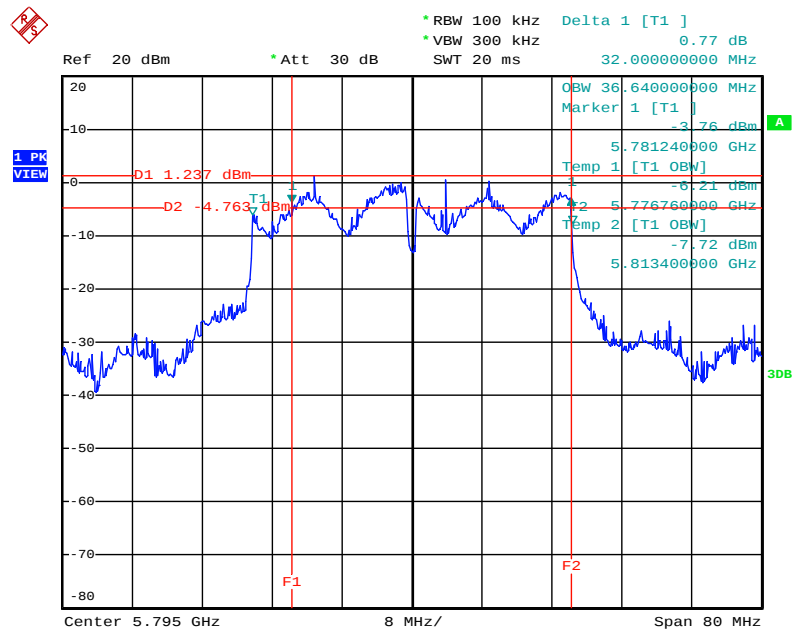


Date: 5.SEP.2013 19:12:25

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3

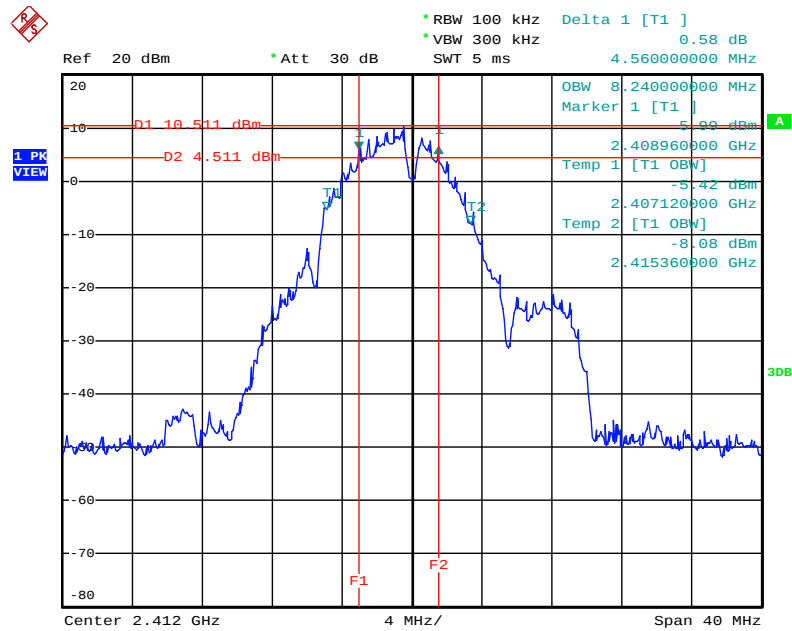


Date: 5.SEP.2013 18:41:01

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3

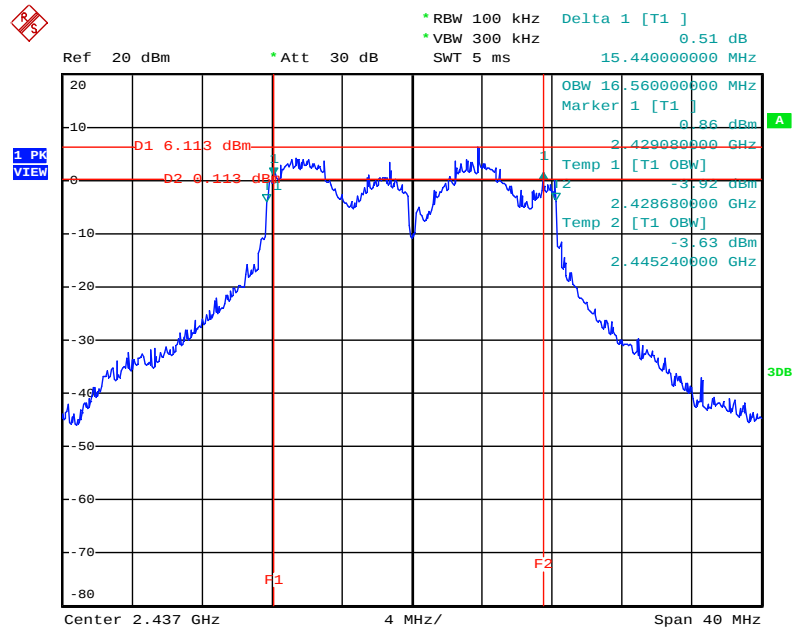

Date: 5.SEP.2013 18:44:27

6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5785 MHz / Chain 4 + Chain 5 + Chain 6

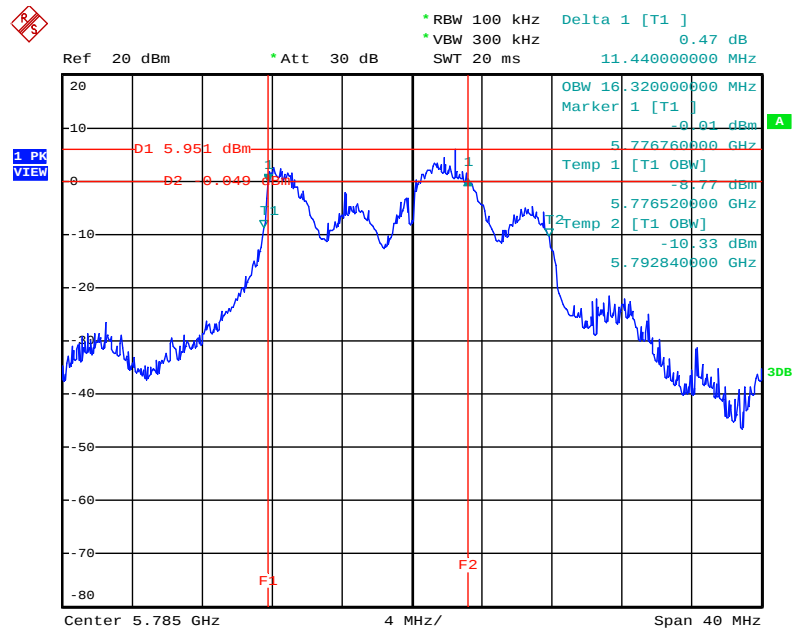

Date: 5.SEP.2013 19:06:58

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

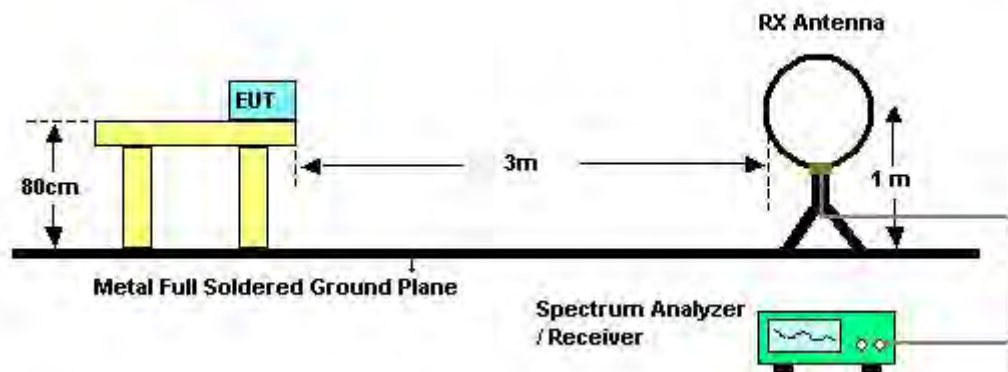

For Radiated Emissions: 30MHz~1GHz

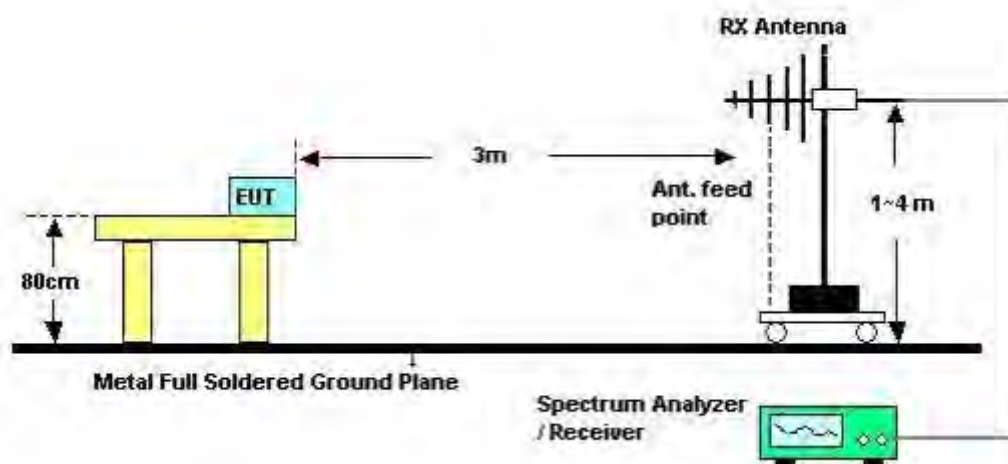

For Radiated Emissions: Above 1GHz

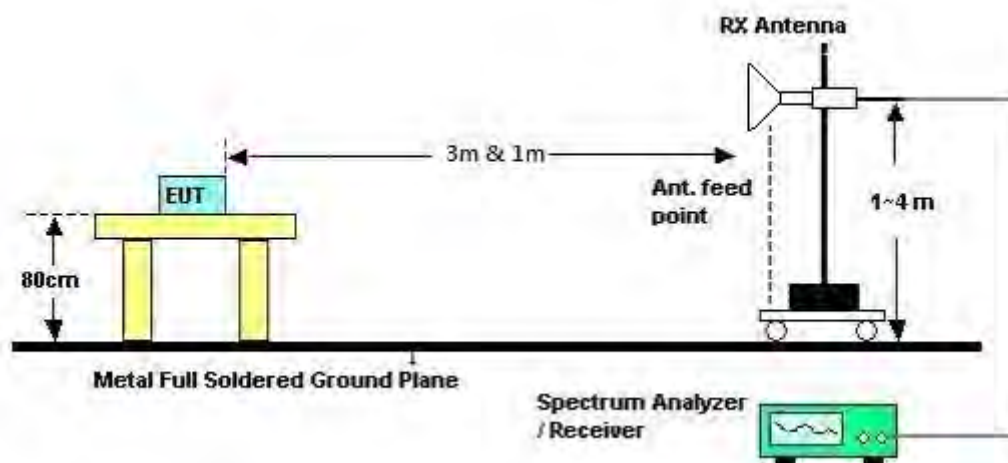

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	Normal Link
Test Date	Sep. 04, 2013		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	Normal Link
Test Mode	Mode 1		

Horizontal

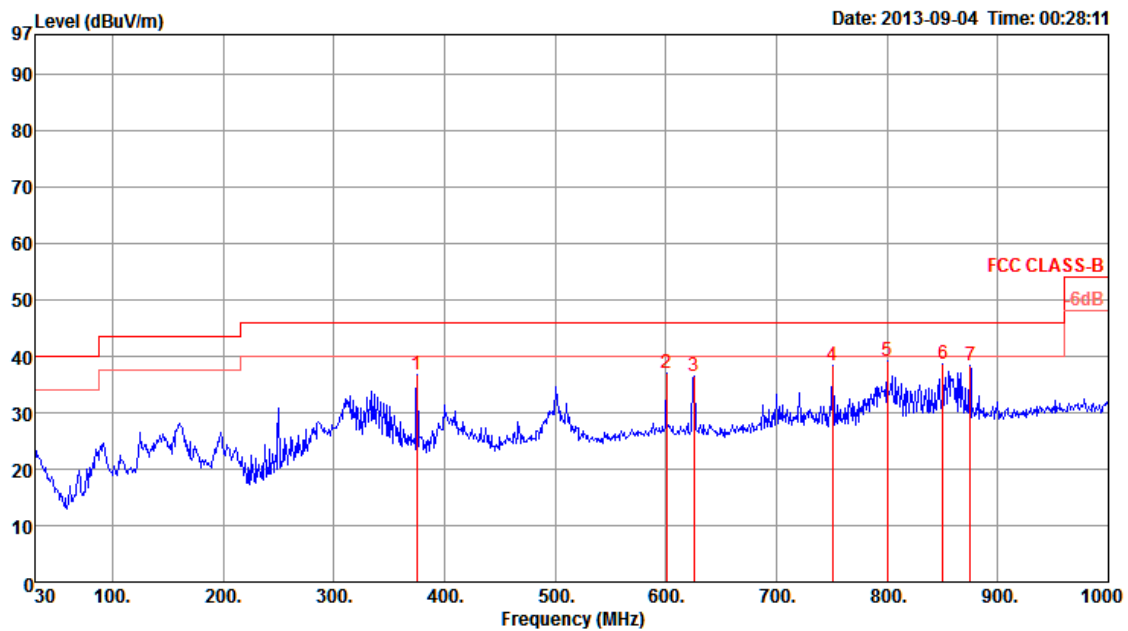

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	375.32	36.77	46.00	-9.23	45.23	2.89	27.26	15.91	Peak	0	400	HORIZONTAL
2	600.36	37.04	46.00	-8.96	41.61	3.73	27.60	19.30	Peak	0	400	HORIZONTAL
3	625.58	36.41	46.00	-9.59	40.72	3.82	27.58	19.45	Peak	0	400	HORIZONTAL
4	750.71	38.47	46.00	-7.53	41.17	4.21	27.12	20.21	Peak	0	400	HORIZONTAL
5	800.18	39.06	46.00	-6.94	40.79	4.36	26.89	20.80	Peak	0	400	HORIZONTAL
6	850.62	38.68	46.00	-7.32	39.94	4.43	26.90	21.21	Peak	0	400	HORIZONTAL
7	874.87	38.25	46.00	-7.75	39.25	4.51	26.86	21.35	Peak	0	400	HORIZONTAL

Vertical

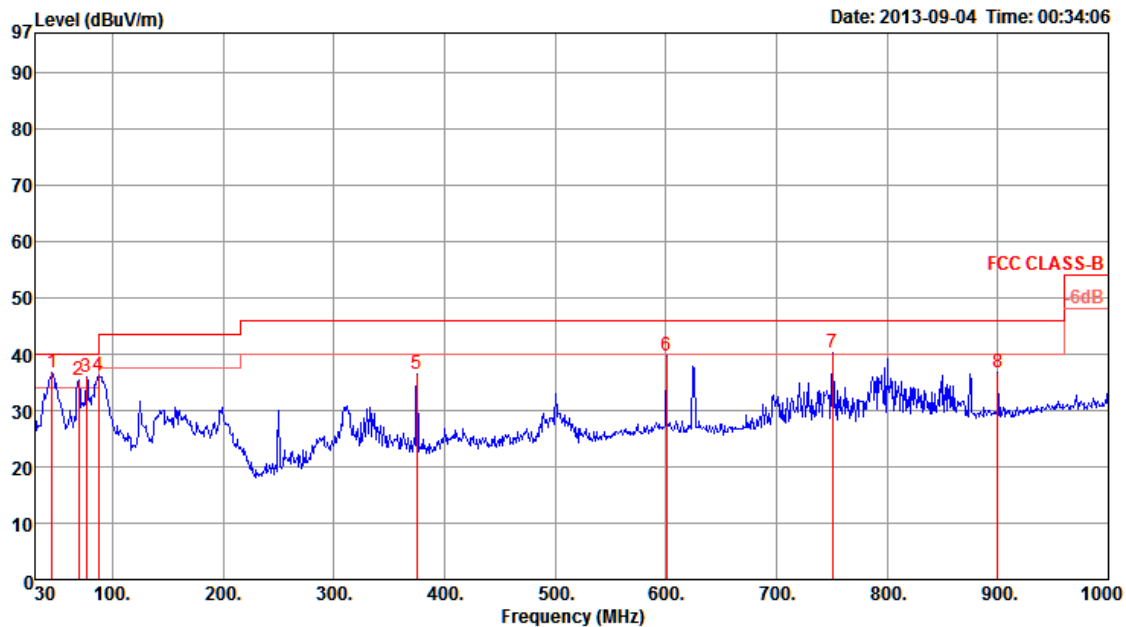

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	45.52	36.86	40.00	-3.14	53.35	1.00	27.94	10.45	Peak	0	100	VERTICAL
2	69.77	35.38	40.00	-4.62	55.24	1.28	27.94	6.80	Peak	0	100	VERTICAL
3	76.56	35.98	40.00	-4.02	55.33	1.31	27.91	7.25	Peak	0	100	VERTICAL
4	87.23	36.13	40.00	-3.87	53.86	1.39	27.88	8.76	Peak	0	100	VERTICAL
5	375.32	36.59	46.00	-9.41	45.05	2.89	27.26	15.91	Peak	0	100	VERTICAL
6	600.36	39.69	46.00	-6.31	44.26	3.73	27.60	19.30	Peak	0	100	VERTICAL
7	750.71	40.31	46.00	-5.69	43.01	4.21	27.12	20.21	Peak	0	100	VERTICAL
8	900.09	36.77	46.00	-9.23	37.50	4.60	26.83	21.50	Peak	0	100	VERTICAL

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	Normal Link
Test Mode	Mode 2		

Horizontal

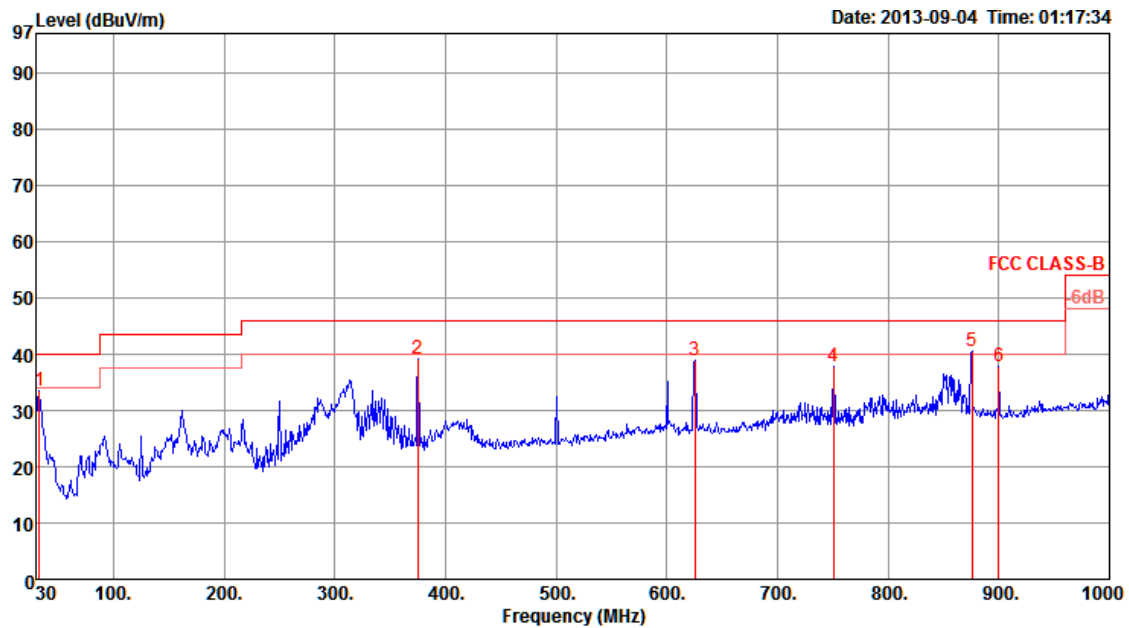

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	Pol/Phase
1	32.91	33.57	40.00	-6.43	42.58	0.88	27.99	18.10	Peak	0	400	HORIZONTAL
2	375.32	39.26	46.00	-6.74	47.72	2.89	27.26	15.91	Peak	0	400	HORIZONTAL
3	625.58	38.94	46.00	-7.06	43.25	3.82	27.58	19.45	Peak	0	400	HORIZONTAL
4	750.71	37.88	46.00	-8.12	40.58	4.21	27.12	20.21	Peak	0	400	HORIZONTAL
5	875.84	40.66	46.00	-5.34	41.65	4.51	26.86	21.36	Peak	0	400	HORIZONTAL
6	900.09	37.84	46.00	-8.16	38.57	4.60	26.83	21.50	Peak	0	400	HORIZONTAL

Vertical

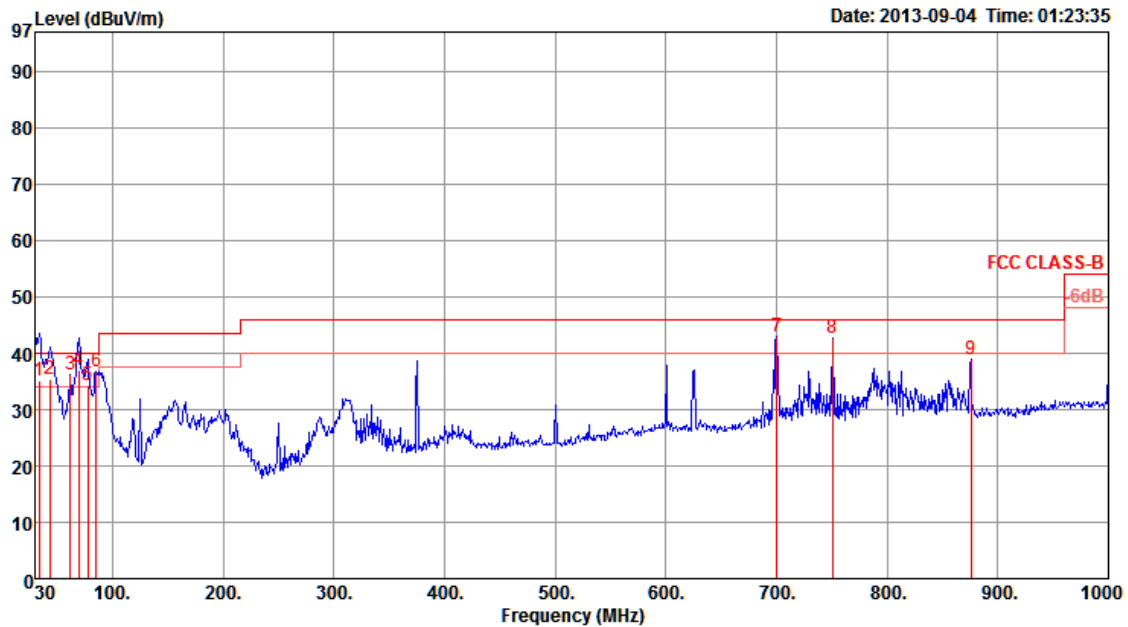

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	
1	33.88	35.10	40.00	-4.90	44.69	0.90	27.99	17.50	QP	126	109	VERTICAL
2	43.58	35.51	40.00	-4.49	51.08	1.00	27.95	11.38	QP	166	100	VERTICAL
3	62.01	36.33	40.00	-3.67	56.24	1.18	27.97	6.88	Peak	0	100	VERTICAL
4	69.77	36.91	40.00	-3.09	56.77	1.28	27.94	6.80	QP	1	110	VERTICAL
5	77.53	34.19	40.00	-5.81	53.47	1.32	27.91	7.31	QP	260	109	VERTICAL
6	85.29	36.73	40.00	-3.27	54.84	1.38	27.89	8.40	Peak	0	100	VERTICAL
7	700.27	42.98	46.00	-3.02	45.90	4.16	27.08	20.00	Peak	0	100	VERTICAL
8	750.71	42.69	46.00	-3.31	45.39	4.21	27.12	20.21	Peak	0	100	VERTICAL
9	875.84	38.99	46.00	-7.01	39.98	4.51	26.86	21.36	Peak	0	100	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	24°C	Humidity	53%
Test Engineer	Jim Huang	Configurations	IEEE 802.11n MCS0 20MHz CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 27, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4822.37	50.37	74.00	-23.63	49.03	3.31	33.06	35.03	100	146	HORIZONTAL
2	4823.17	35.95	54.00	-18.05	34.61	3.31	33.06	35.03	100	146	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4814.51	43.23	74.00	-30.77	41.94	3.31	33.02	35.04	100	277	VERTICAL
2	4821.28	31.31	54.00	-22.69	29.97	3.31	33.06	35.03	100	277	VERTICAL

Temperature	24°C	Humidity	53%
Test Engineer	Jim Huang	Configurations	IEEE 802.11n MCS0 20MHz CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 27, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4873.33	47.83	74.00	-26.17	46.37	3.33	33.16	35.03	Peak	108	44 HORIZONTAL
2	4873.81	33.49	54.00	-20.51	32.03	3.33	33.16	35.03	Average	108	44 HORIZONTAL
3	7302.99	33.15	54.00	-20.85	28.57	4.06	35.92	35.40	Average	100	122 HORIZONTAL
4	7304.33	46.73	74.00	-27.27	42.15	4.06	35.92	35.40	Peak	100	122 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4873.07	44.09	74.00	-29.91	42.63	3.33	33.16	35.03	Peak	100	36 VERTICAL
2	4873.65	32.46	54.00	-21.54	31.00	3.33	33.16	35.03	Average	100	36 VERTICAL
3	7312.80	33.22	54.00	-20.78	28.60	4.06	35.96	35.40	Average	100	249 VERTICAL
4	7317.03	46.34	74.00	-27.66	41.72	4.06	35.96	35.40	Peak	100	249 VERTICAL

Temperature	24°C	Humidity	53%
Test Engineer	Jim Huang	Configurations	IEEE 802.11n MCS0 20MHz CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 27, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4917.49	43.56	74.00	-30.44	42.00	3.35	33.23	35.02	Peak	100	316	HORIZONTAL
2	4919.13	31.06	54.00	-22.94	29.50	3.35	33.23	35.02	Average	100	316	HORIZONTAL
3	7381.19	46.25	74.00	-27.75	41.50	4.06	36.09	35.40	Peak	100	255	HORIZONTAL
4	7384.24	33.32	54.00	-20.68	28.57	4.06	36.09	35.40	Average	100	255	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4918.65	30.50	54.00	-23.50	28.94	3.35	33.23	35.02	Average	100	247	VERTICAL
2	4921.28	43.15	74.00	-30.85	41.58	3.35	33.23	35.01	Peak	100	247	VERTICAL
3	7377.73	46.66	74.00	-27.34	41.91	4.06	36.09	35.40	Peak	100	152	VERTICAL
4	7377.86	33.29	54.00	-20.71	28.54	4.06	36.09	35.40	Average	100	152	VERTICAL

Temperature	24°C	Humidity	53%
Test Engineer	Jim Huang	Configurations	IEEE 802.11n MCS0 40MHz CH 3 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 27, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4839.32	42.50	74.00	-31.50	41.12	3.32	33.09	35.03	Peak	100	181 HORIZONTAL
2	4842.62	30.11	54.00	-23.89	28.73	3.32	33.09	35.03	Average	100	181 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4842.53	29.95	54.00	-24.05	28.57	3.32	33.09	35.03	Average	100	91 VERTICAL
2	4843.26	42.33	74.00	-31.67	40.95	3.32	33.09	35.03	Peak	100	91 VERTICAL

Temperature	24°C	Humidity	53%
Test Engineer	Jim Huang	Configurations	IEEE 802.11n MCS0 40MHz CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 27, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4870.19	30.02	54.00	-23.98	28.60	3.33	33.12	35.03	Average	100	201 HORIZONTAL
2	4880.76	43.54	74.00	-30.46	42.08	3.33	33.16	35.03	Peak	100	201 HORIZONTAL
3	7305.17	33.29	54.00	-20.71	28.71	4.06	35.92	35.40	Average	100	288 HORIZONTAL
4	7314.40	45.86	74.00	-28.14	41.24	4.06	35.96	35.40	Peak	100	288 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.84	41.72	74.00	-32.28	40.26	3.33	33.16	35.03	Peak	100	117 VERTICAL
2	4879.42	29.60	54.00	-24.40	28.14	3.33	33.16	35.03	Average	100	117 VERTICAL
3	7302.73	45.74	74.00	-28.26	41.16	4.06	35.92	35.40	Peak	100	200 VERTICAL
4	7312.64	33.22	54.00	-20.78	28.60	4.06	35.96	35.40	Average	100	200 VERTICAL

Temperature	24°C	Humidity	53%
Test Engineer	Jim Huang	Configurations	IEEE 802.11n MCS0 40MHz CH 9 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 27, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4903.81	30.10	54.00	-23.90	28.59	3.34	33.19	35.02	Average	100	220 HORIZONTAL
2	4904.67	42.50	74.00	-31.50	40.99	3.34	33.19	35.02	Peak	100	220 HORIZONTAL
3	7346.93	33.56	54.00	-20.44	28.88	4.06	36.02	35.40	Average	100	155 HORIZONTAL
4	7363.24	46.84	74.00	-27.16	42.12	4.06	36.06	35.40	Peak	100	155 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4904.19	43.32	74.00	-30.68	41.81	3.34	33.19	35.02	Peak	100	263 VERTICAL
2	4906.98	30.33	54.00	-23.67	28.78	3.34	33.23	35.02	Average	100	263 VERTICAL
3	7355.01	33.61	54.00	-20.39	28.93	4.06	36.02	35.40	Average	100	196 VERTICAL
4	7359.46	46.24	74.00	-27.76	41.52	4.06	36.06	35.40	Peak	100	196 VERTICAL

Temperature	24°C	Humidity	53%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 20MHz CH 149 / Chain 4 + Chain 5 + Chain 6
Test Date	Aug. 28, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11491.08	64.11	74.00	-9.89	50.77	9.09	39.10	34.85	144	295	HORIZONTAL Peak
2	11491.62	50.95	54.00	-3.05	37.61	9.09	39.10	34.85	144	295	HORIZONTAL Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11493.96	48.06	54.00	-5.94	34.71	9.10	39.10	34.85	187	290	VERTICAL Average
2	11494.98	58.71	74.00	-15.29	45.36	9.10	39.10	34.85	187	290	VERTICAL Peak

Temperature	24°C	Humidity	53%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 20MHz CH 157 / Chain 4 + Chain 5 + Chain 6
Test Date	Aug. 28, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11563.99	66.08	74.00	-7.92	52.81	9.11	39.01	34.85	100	230	HORIZONTAL	Peak
2	11564.55	50.61	54.00	-3.39	37.34	9.11	39.01	34.85	100	230	HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11570.93	49.11	54.00	-4.89	35.84	9.11	39.01	34.85	146	277	VERTICAL	Average
2	11571.60	63.75	74.00	-10.25	50.48	9.11	39.01	34.85	146	277	VERTICAL	Peak

Temperature	24°C	Humidity	53%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 20MHz CH 165 / Chain 4 + Chain 5 + Chain 6
Test Date	Aug. 28, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11652.18	50.86	54.00	-3.14	37.71	9.11	38.89	34.85	151	222	HORIZONTAL	Average
2	11653.38	65.23	74.00	-8.77	52.08	9.11	38.89	34.85	151	222	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11651.29	47.09	54.00	-6.91	33.94	9.11	38.89	34.85	157	332	VERTICAL	Average
2	11651.39	60.31	74.00	-13.69	47.16	9.11	38.89	34.85	157	332	VERTICAL	Peak

Temperature	24°C	Humidity	53%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 40MHz CH 151 / Chain 4 + Chain 5 + Chain 6
Test Date	Aug. 28, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11503.61	60.81	74.00	-13.19	47.46	9.10	39.10	34.85	100	230	HORIZONTAL	Peak
2	11504.57	47.88	54.00	-6.12	34.53	9.10	39.10	34.85	100	230	HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11513.89	57.50	74.00	-16.50	44.15	9.10	39.10	34.85	169	270	VERTICAL	Peak
2	11515.92	43.84	54.00	-10.16	30.49	9.10	39.10	34.85	169	270	VERTICAL	Average

Temperature	24°C	Humidity	53%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 40MHz CH 159 / Chain 4 + Chain 5 + Chain 6
Test Date	Aug. 28, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11583.80	62.93	74.00	-11.07	49.70	9.11	38.97	34.85	100	229	HORIZONTAL	Peak
2	11583.97	49.19	54.00	-4.81	35.96	9.11	38.97	34.85	100	229	HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11591.08	62.75	74.00	-11.25	49.52	9.11	38.97	34.85	156	275	VERTICAL	Peak
2	11592.21	48.25	54.00	-5.75	35.02	9.11	38.97	34.85	156	275	VERTICAL	Average

Temperature	24°C	Humidity	53%
Test Engineer	Jim Huang	Configurations	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 27, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4823.99	50.24	54.00	-3.76	48.90	3.31	33.06	35.03	Average	100	147	HORIZONTAL
2	4824.02	53.40	74.00	-20.60	52.06	3.31	33.06	35.03	Peak	100	147	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4824.02	44.68	54.00	-9.32	43.34	3.31	33.06	35.03	Average	100	353	VERTICAL
2	4824.06	49.63	74.00	-24.37	48.29	3.31	33.06	35.03	Peak	100	353	VERTICAL

Temperature	24°C	Humidity	53%
Test Engineer	Jim Huang	Configurations	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 27, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4873.94	55.25	74.00	-18.75	53.79	3.33	33.16	35.03	Peak	100	47 HORIZONTAL
2	4874.03	50.88	54.00	-3.12	49.42	3.33	33.16	35.03	Average	100	47 HORIZONTAL
3	7309.81	33.94	54.00	-20.06	29.32	4.06	35.96	35.40	Average	100	330 HORIZONTAL
4	7309.83	46.63	74.00	-27.37	42.01	4.06	35.96	35.40	Peak	100	330 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4873.96	50.91	74.00	-23.09	49.45	3.33	33.16	35.03	Peak	100	42 VERTICAL
2	4874.02	46.97	54.00	-7.03	45.51	3.33	33.16	35.03	Average	100	42 VERTICAL
3	7309.56	34.71	54.00	-19.29	30.09	4.06	35.96	35.40	Average	131	322 VERTICAL
4	7309.73	47.02	74.00	-26.98	42.40	4.06	35.96	35.40	Peak	131	322 VERTICAL

Temperature	24°C	Humidity	53%
Test Engineer	Jim Huang	Configurations	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 27, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4923.99	47.25	54.00	-6.75	45.65	3.35	33.26	35.01	Average	100	344 HORIZONTAL
2	4924.06	51.45	74.00	-22.55	49.85	3.35	33.26	35.01	Peak	100	344 HORIZONTAL
3	7383.80	33.47	54.00	-20.53	28.72	4.06	36.09	35.40	Average	100	248 HORIZONTAL
4	7386.26	46.33	74.00	-27.67	41.58	4.06	36.09	35.40	Peak	100	248 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4923.95	50.35	74.00	-23.65	48.75	3.35	33.26	35.01	Peak	100	19 VERTICAL
2	4924.01	45.49	54.00	-8.51	43.89	3.35	33.26	35.01	Average	100	19 VERTICAL
3	7384.33	33.29	54.00	-20.71	28.54	4.06	36.09	35.40	Average	100	138 VERTICAL
4	7385.26	47.35	74.00	-26.65	42.60	4.06	36.09	35.40	Peak	100	138 VERTICAL

Temperature	24°C	Humidity	53%
Test Engineer	Jim Huang	Configurations	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 27, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4823.23	48.78	74.00	-25.22	47.44	3.31	33.06	35.03	Peak	100	147 HORIZONTAL
2	4823.81	34.81	54.00	-19.19	33.47	3.31	33.06	35.03	Average	100	147 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4817.85	29.93	54.00	-24.07	28.63	3.31	33.02	35.03	Average	100	262 VERTICAL
2	4818.30	42.91	74.00	-31.09	41.61	3.31	33.02	35.03	Peak	100	262 VERTICAL

Temperature	24°C	Humidity	53%
Test Engineer	Jim Huang	Configurations	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 27, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4871.72	33.68	54.00	-20.32	32.22	3.33	33.16	35.03	Average	120	29 HORIZONTAL
2	4873.01	47.88	74.00	-26.12	46.42	3.33	33.16	35.03	Peak	120	29 HORIZONTAL
3	7301.58	45.81	74.00	-28.19	41.23	4.06	35.92	35.40	Peak	100	119 HORIZONTAL
4	7308.63	33.23	54.00	-20.77	28.61	4.06	35.96	35.40	Average	100	119 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4872.30	31.31	54.00	-22.69	29.85	3.33	33.16	35.03	Average	100	330 VERTICAL
2	4877.59	43.05	74.00	-30.95	41.59	3.33	33.16	35.03	Peak	100	330 VERTICAL
3	7304.01	45.52	74.00	-28.48	40.94	4.06	35.92	35.40	Peak	100	187 VERTICAL
4	7315.55	33.04	54.00	-20.96	28.42	4.06	35.96	35.40	Average	100	187 VERTICAL

Temperature	24°C	Humidity	53%
Test Engineer	Jim Huang	Configurations	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 27, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4920.70	43.66	74.00	-30.34	42.09	3.35	33.23	35.01	Peak	100	127 HORIZONTAL
2	4922.24	31.38	54.00	-22.62	29.78	3.35	33.26	35.01	Average	100	127 HORIZONTAL
3	7385.84	33.39	54.00	-20.61	28.64	4.06	36.09	35.40	Average	100	196 HORIZONTAL
4	7391.19	46.12	74.00	-27.88	41.37	4.06	36.09	35.40	Peak	100	196 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4915.19	43.12	74.00	-30.88	41.56	3.35	33.23	35.02	Peak	100	256 VERTICAL
2	4923.33	30.49	54.00	-23.51	28.89	3.35	33.26	35.01	Average	100	256 VERTICAL
3	7378.18	33.50	54.00	-20.50	28.75	4.06	36.09	35.40	Average	100	120 VERTICAL
4	7382.70	45.87	74.00	-28.13	41.12	4.06	36.09	35.40	Peak	100	120 VERTICAL

Temperature	24°C	Humidity	53%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 149 / Chain 4 + Chain 5 + Chain 6
Test Date	Aug. 28, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11486.19	65.49	74.00	-8.51	52.15	9.09	39.10	34.85	106	323	HORIZONTAL	Peak
2	11486.72	50.90	54.00	-3.10	37.56	9.09	39.10	34.85	106	323	HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11492.64	61.05	74.00	-12.95	47.71	9.09	39.10	34.85	172	274	VERTICAL	Peak
2	11493.07	47.46	54.00	-6.54	34.12	9.09	39.10	34.85	172	274	VERTICAL	Average

Temperature	24°C	Humidity	53%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 157 / Chain 4 + Chain 5 + Chain 6
Test Date	Aug. 28, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11566.82	50.56	54.00	-3.44	37.29	9.11	39.01	34.85	100	230	HORIZONTAL	Average
2	11567.02	65.35	74.00	-8.65	52.08	9.11	39.01	34.85	100	230	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11571.77	48.34	54.00	-5.66	35.07	9.11	39.01	34.85	161	278	VERTICAL	Average
2	11572.02	62.57	74.00	-11.43	49.30	9.11	39.01	34.85	161	278	VERTICAL	Peak

Temperature	24°C	Humidity	53%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 165 / Chain 4 + Chain 5 + Chain 6
Test Date	Aug. 28, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11645.59	50.76	54.00	-3.24	37.57	9.11	38.93	34.85	100	324	HORIZONTAL	Average
2	11646.64	64.80	74.00	-9.20	51.61	9.11	38.93	34.85	100	324	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11652.02	64.54	74.00	-9.46	51.39	9.11	38.89	34.85	166	269	VERTICAL	Peak
2	11652.12	50.12	54.00	-3.88	36.97	9.11	38.89	34.85	166	269	VERTICAL	Average

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB 558074 D01 v03r01 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure
2. The radiated emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit.
Only worst data of each operating mode is presented.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	24°C	Humidity	53%
Test Engineer	Jim Huang	Configurations	IEEE 802.11n MCS0 20MHz CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 27, 2013		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.52	69.36	74.00	-4.64	38.98	2.21	28.17	0.00	Peak	153	173	HORIZONTAL
2	2390.00	52.34	54.00	-1.66	21.95	2.22	28.17	0.00	Average	153	173	HORIZONTAL
3	2420.33	115.44			84.96	2.23	28.25	0.00	Peak	153	173	HORIZONTAL
4	2420.49	104.59			74.11	2.23	28.25	0.00	Average	153	173	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	52.41	54.00	-1.59	22.02	2.22	28.17	0.00	Average	155	176	HORIZONTAL
2	2390.00	64.38	74.00	-9.62	33.99	2.22	28.17	0.00	Peak	155	176	HORIZONTAL
3	2431.23	111.69			81.21	2.23	28.25	0.00	Average	155	176	HORIZONTAL
4	2431.55	123.58			93.10	2.23	28.25	0.00	Peak	155	176	HORIZONTAL
5	2483.50	51.75	54.00	-2.25	21.11	2.26	28.38	0.00	Average	155	176	HORIZONTAL
6	2484.46	64.26	74.00	-9.74	33.62	2.26	28.38	0.00	Peak	155	176	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2453.83	103.84			73.27	2.24	28.33	0.00	Average	149	178	HORIZONTAL
2	2467.13	115.75			85.16	2.26	28.33	0.00	Peak	149	178	HORIZONTAL
3	2483.50	52.55	54.00	-1.45	21.91	2.26	28.38	0.00	Average	149	178	HORIZONTAL
4	2483.66	66.43	74.00	-7.57	35.79	2.26	28.38	0.00	Peak	149	178	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	24°C	Humidity	53%
Test Engineer	Jim Huang	Configurations	IEEE 802.11n MCS0 40MHz CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 27, 2013		

Channel 3

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	2389.68	69.59	74.00	-4.41	39.21	2.21	28.17	0.00	Peak	154	174 HORIZONTAL
2	2390.00	52.75	54.00	-1.25	22.36	2.22	28.17	0.00	Average	154	174 HORIZONTAL
3	2426.49	101.92			71.44	2.23	28.25	0.00	Average	154	174 HORIZONTAL
4	2426.49	113.84			83.36	2.23	28.25	0.00	Peak	154	174 HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	2390.00	52.91	54.00	-1.09	22.52	2.22	28.17	0.00	Average	157	177 HORIZONTAL
2	2390.00	66.92	74.00	-7.08	36.53	2.22	28.17	0.00	Peak	157	177 HORIZONTAL
3	2431.87	105.34			74.86	2.23	28.25	0.00	Average	157	177 HORIZONTAL
4	2431.87	118.07			87.59	2.23	28.25	0.00	Peak	157	177 HORIZONTAL
5	2483.50	49.25	54.00	-4.75	18.61	2.26	28.38	0.00	Average	157	177 HORIZONTAL
6	2483.50	61.86	74.00	-12.14	31.22	2.26	28.38	0.00	Peak	157	177 HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	2441.10	113.92			83.39	2.24	28.29	0.00	Peak	149	178 HORIZONTAL
2	2442.71	101.95			71.42	2.24	28.29	0.00	Average	149	178 HORIZONTAL
3	2483.50	52.75	54.00	-1.25	22.11	2.26	28.38	0.00	Average	149	178 HORIZONTAL
4	2483.50	72.04	74.00	-1.96	41.40	2.26	28.38	0.00	Peak	149	178 HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	24°C	Humidity	53%
Test Engineer	Jim Huang	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 27, 2013		

Channel 1

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	2389.68	63.45	74.00	-10.55	33.07	2.21	28.17	0.00	Peak	205	173	HORIZONTAL
2	2390.00	46.49	54.00	-7.51	16.10	2.22	28.17	0.00	Average	205	173	HORIZONTAL
3	2410.72	113.33			82.90	2.22	28.21	0.00	Average	205	173	HORIZONTAL
4	2411.04	117.19			86.76	2.22	28.21	0.00	Peak	205	173	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	2390.00	50.49	54.00	-3.51	20.10	2.22	28.17	0.00	Average	145	177	HORIZONTAL
2	2390.00	61.73	74.00	-12.27	31.34	2.22	28.17	0.00	Peak	145	177	HORIZONTAL
3	2436.04	123.84			93.32	2.23	28.29	0.00	Peak	145	177	HORIZONTAL
4	2436.36	120.22			89.70	2.23	28.29	0.00	Average	145	177	HORIZONTAL
5	2483.50	52.32	54.00	-1.68	21.68	2.26	28.38	0.00	Average	145	177	HORIZONTAL
6	2483.50	63.76	74.00	-10.24	33.12	2.26	28.38	0.00	Peak	145	177	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	2461.20	118.46			87.89	2.24	28.33	0.00	Average	147	360	HORIZONTAL
2	2461.20	122.29			91.72	2.24	28.33	0.00	Peak	147	360	HORIZONTAL
3	2483.50	52.83	54.00	-1.17	22.19	2.26	28.38	0.00	Average	147	360	HORIZONTAL
4	2483.82	69.30	74.00	-4.70	38.66	2.26	28.38	0.00	Peak	147	360	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	24°C	Humidity	53%
Test Engineer	Jim Huang	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 27, 2013		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.68	67.95	74.00	-6.05	37.57	2.21	28.17	0.00	Peak	156	179	HORIZONTAL
2	2390.00	51.64	54.00	-2.36	21.25	2.22	28.17	0.00	Average	156	179	HORIZONTAL
3	2419.05	118.01			87.53	2.23	28.25	0.00	Peak	156	179	HORIZONTAL
4	2419.21	106.65			76.17	2.23	28.25	0.00	Average	156	179	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	52.49	54.00	-1.51	22.10	2.22	28.17	0.00	Average	154	179	HORIZONTAL
2	2390.00	63.77	74.00	-10.23	33.38	2.22	28.17	0.00	Peak	154	179	HORIZONTAL
3	2444.37	112.01			81.48	2.24	28.29	0.00	Average	154	179	HORIZONTAL
4	2444.69	122.95			92.42	2.24	28.29	0.00	Peak	154	179	HORIZONTAL
5	2483.50	51.39	54.00	-2.61	20.75	2.26	28.38	0.00	Average	154	179	HORIZONTAL
6	2483.50	62.45	74.00	-11.55	31.81	2.26	28.38	0.00	Peak	154	179	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2460.56	114.98			84.41	2.24	28.33	0.00	Peak	188	10	HORIZONTAL
2	2463.12	104.01			73.44	2.24	28.33	0.00	Average	188	10	HORIZONTAL
3	2483.50	51.73	54.00	-2.27	21.09	2.26	28.38	0.00	Average	188	10	HORIZONTAL
4	2483.66	67.28	74.00	-6.72	36.64	2.26	28.38	0.00	Peak	188	10	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band


Plot on Configuration IEEE 802.11n MCS0 20MHz / Reference Level




Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 30MHz~2400MHz (down 30dBc)

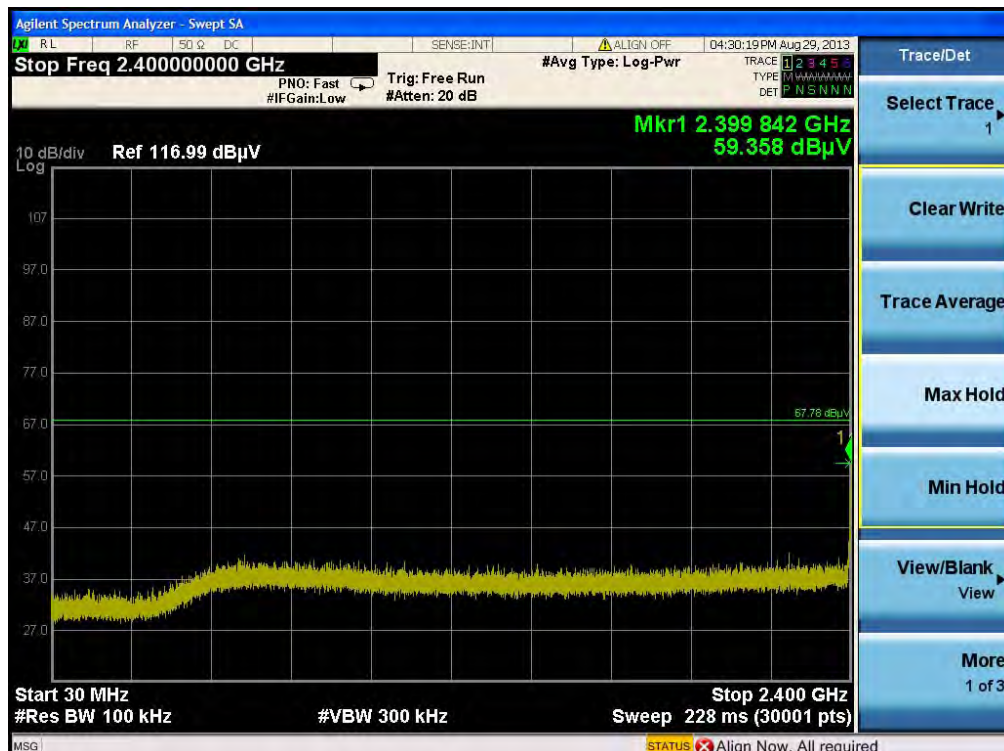


Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 2500MHz~26500MHz (down 30dBc)

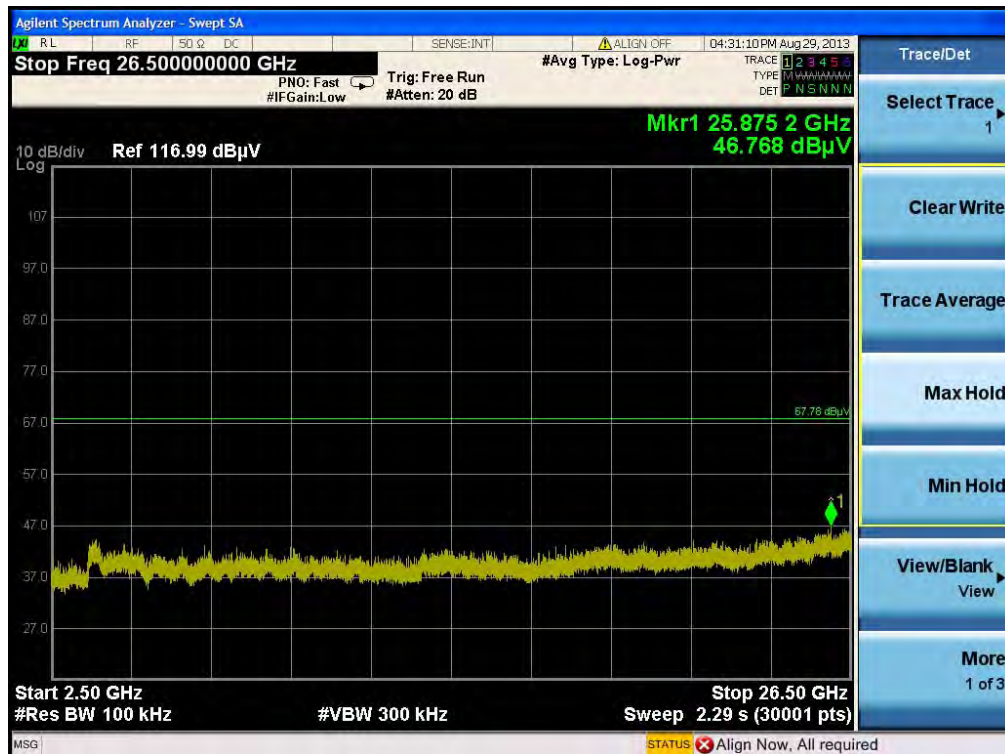


Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 30MHz~2400MHz (down 30dBc)

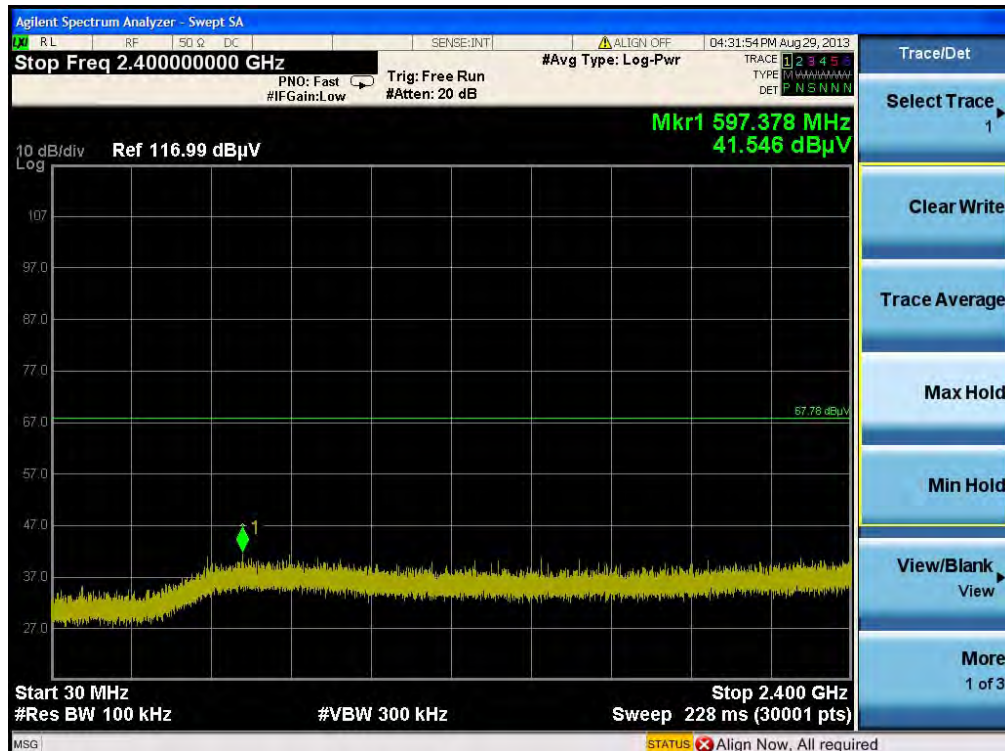

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 2500MHz~26500MHz (down 30dBc)

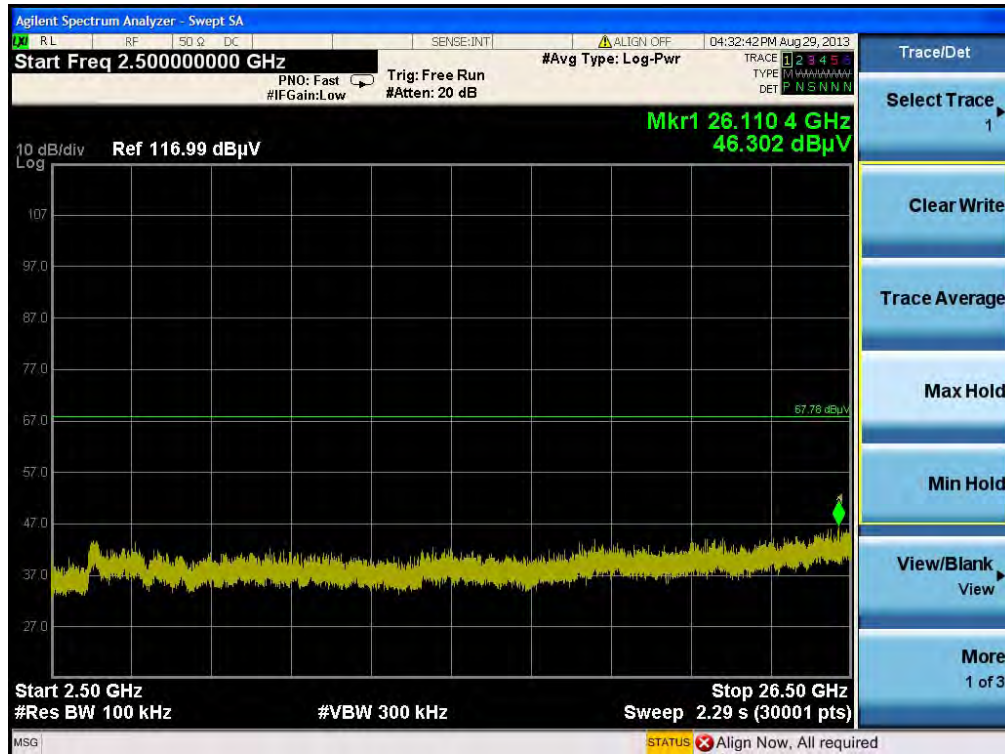

Plot on Configuration IEEE 802.11n MCS0 40MHz / Reference Level

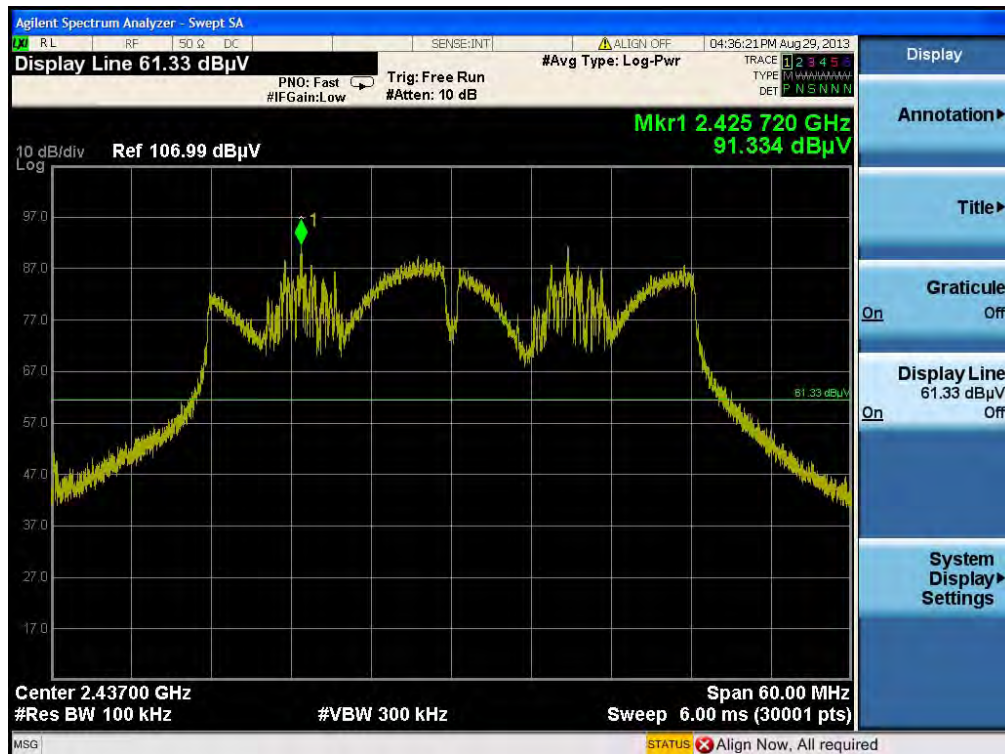

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 30MHz~2400MHz (down 30dBc)



Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 2500MHz~26500MHz (down 30dBc)




Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 30MHz~2400MHz (down 30dBc)



Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 2500MHz~26500MHz (down 30dBc)





Agilent Spectrum Analyzer - Swept SA

☒ R.L. RF 50 Ω DC SENSE:INT ☐ ALIGN OFF 03:02:11 PM Aug 29, 2013

Display Line 62.25 dBμV PNO: Fast Trig: Free Run #Avg Type: Log-Pwr TRACE 1 2 3 4 5
 #IFGain:Low #Atten: 10 dB TYPE P N S N N N DET P N S N N N

10 dB/div Log Ref 96.99 dBμV **Mkr1 5.787 459 GHz**
92.247 dBμV

Center 5.78500 GHz Span 30.00 MHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 4.00 ms (30001 pts)

MSG STATUS ☒ Align Now, All required

Annotation
 Title
 Graticule
 On
 Display Line
 62.25 dBμV
 On
 System
 Display
 Settings

Agilent Spectrum Analyzer - Swept SA

Start 30 MHz Stop 5.725 GHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 546 ms (30001 pts)

10 dB/div Ref 96.99 dBμV

Mkr1 5.725 00 GHz 55.886 dBμV

Start Freq 5.72500000 GHz

Trig: Free Run #Atten: 10 dB


#Avg Type: Log-Pwr Avg/Hold: > 100/100

03:06:13 PM Aug 29, 2013

Trace 1 2 3 4 5
 TYPE M M M M M M M M
 DET P N S N N N

MSG STATUS Alian Now. All required


Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 149 / 5850MHz~40000MHz (down 30dBc)

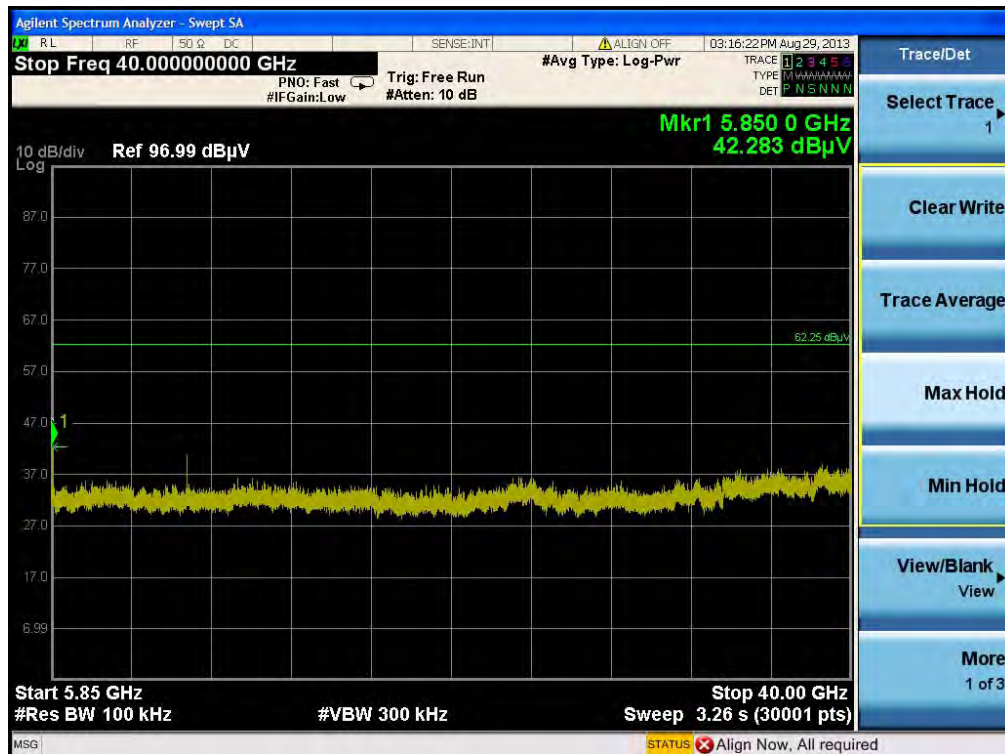

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 165 / 30MHz~5725MHz (down 30dBc)



Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 165 / 5850MHz~40000MHz (down 30dBc)

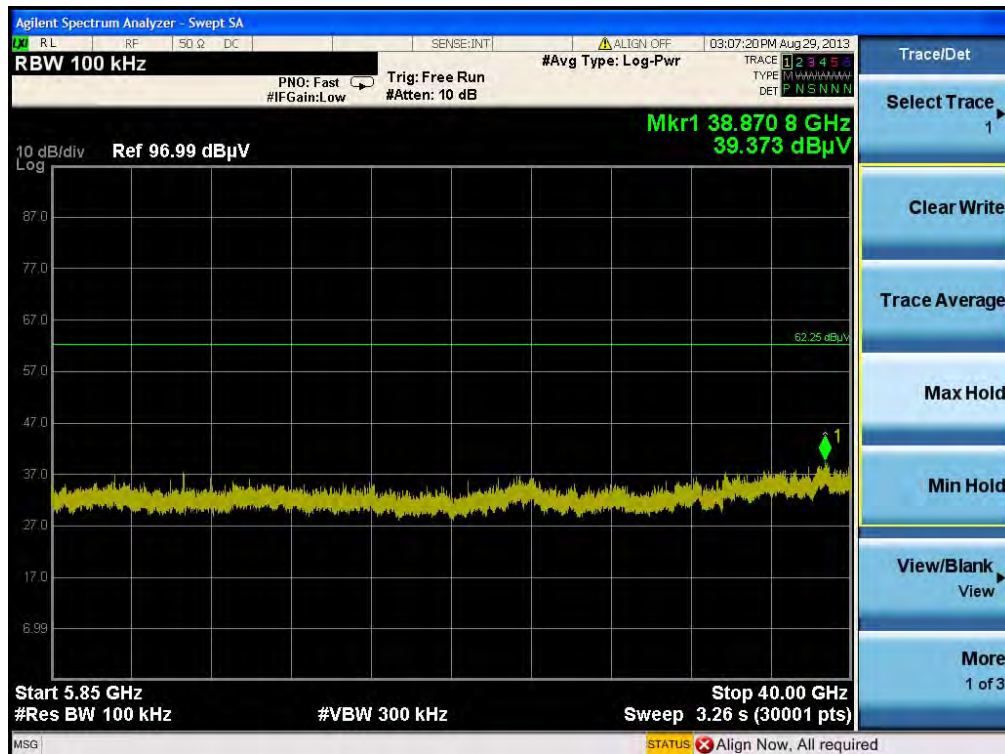


Plot on Configuration IEEE 802.11n MCS0 40MHz / Reference Level



Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 151 / 30MHz~5725MHz (down 30dBc)




Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 151 / 5850MHz~40000MHz (down 30dBc)

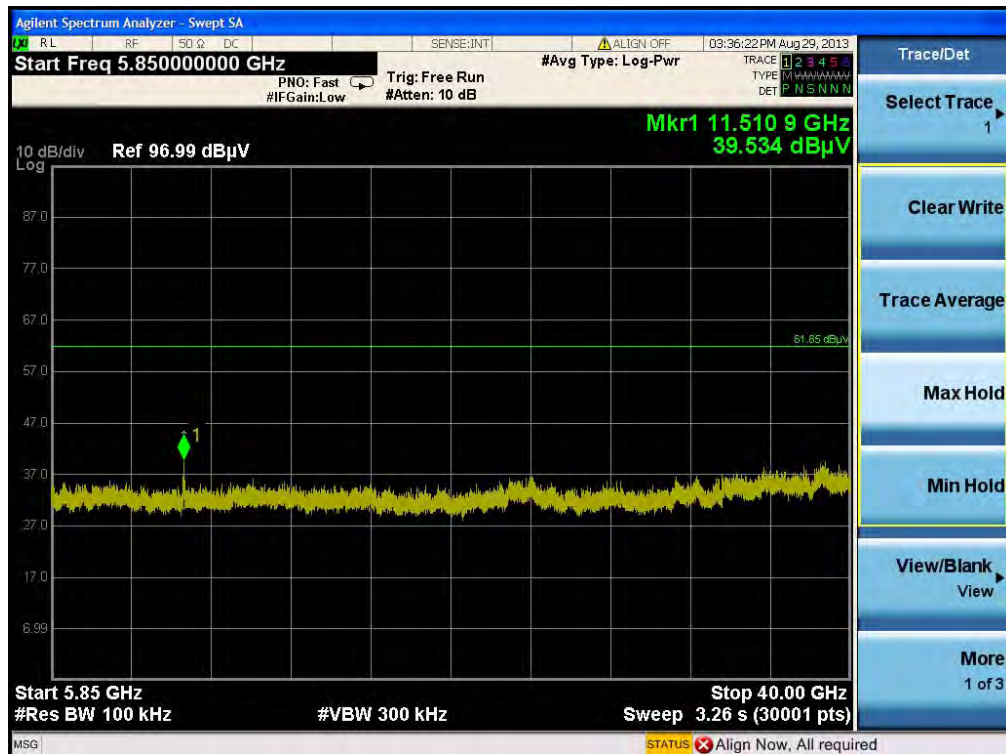

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 159 / 30MHz~5725MHz (down 30dBc)




Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 159 / 5850MHz~40000MHz (down 30dBc)

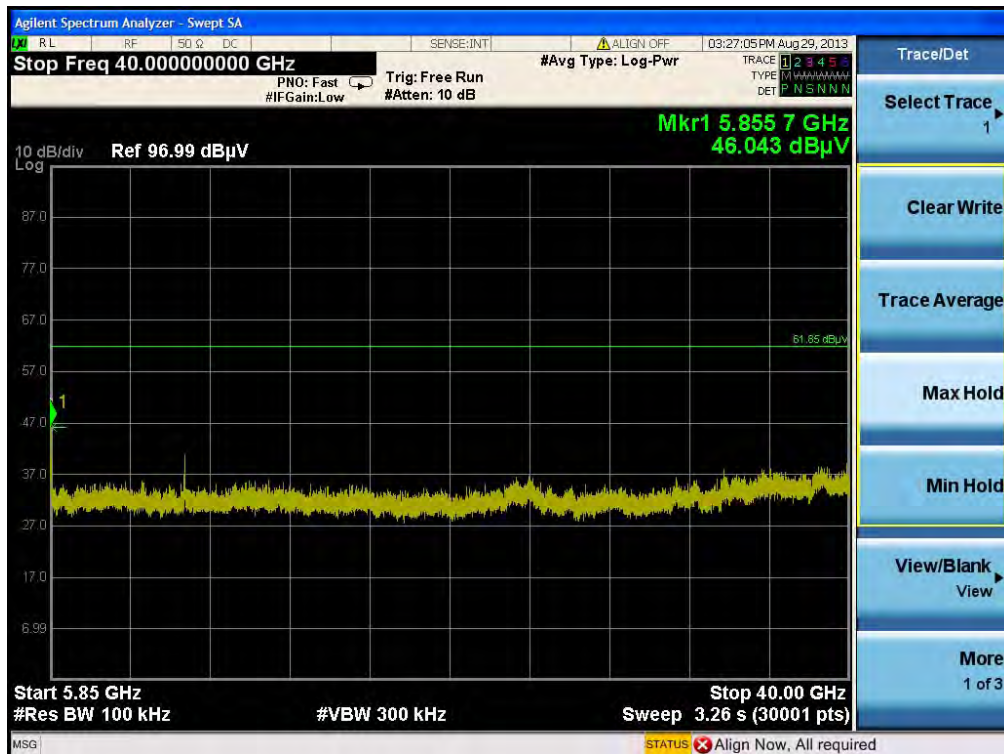


Plot on Configuration IEEE 802.11b / Reference Level




Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

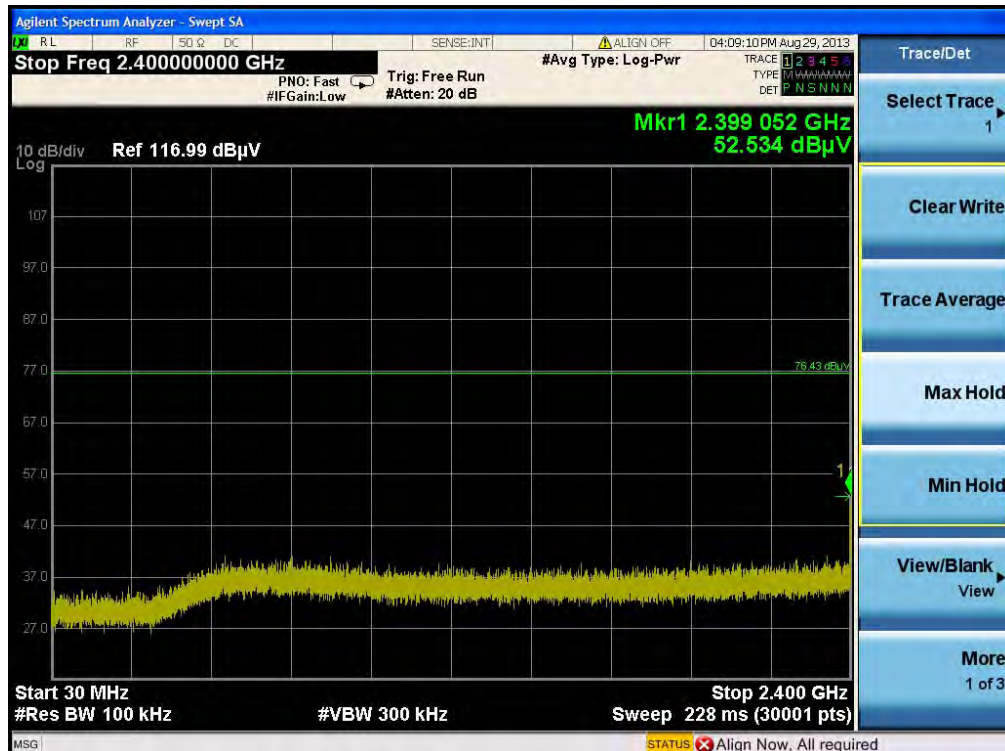


Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

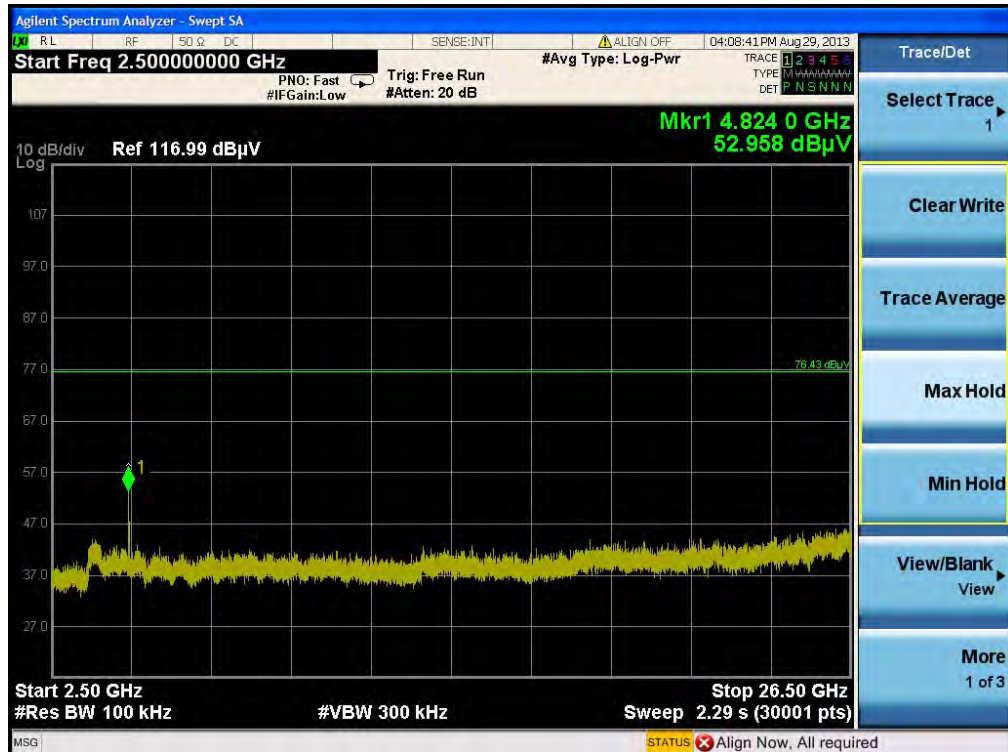


Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

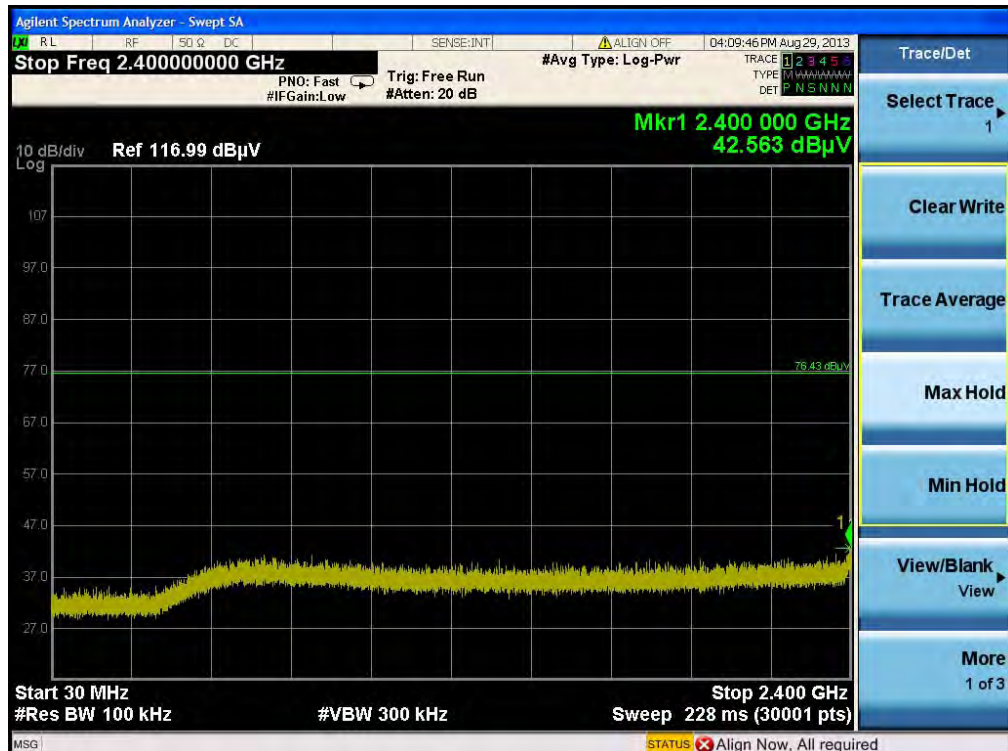

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

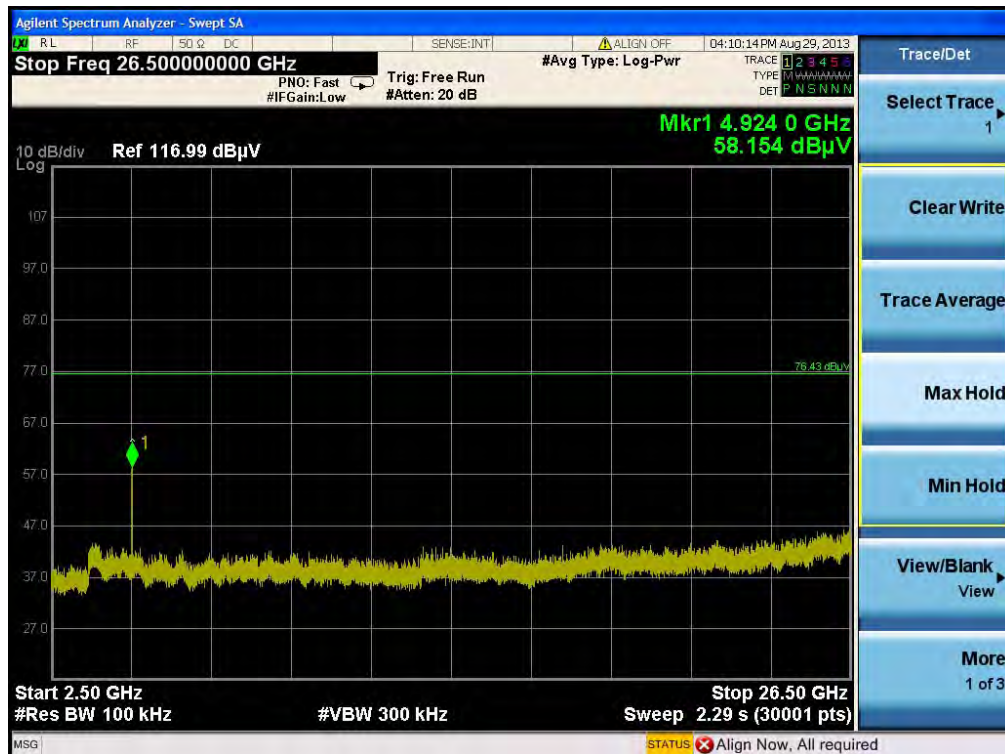


Plot on Configuration IEEE 802.11g / Reference Level

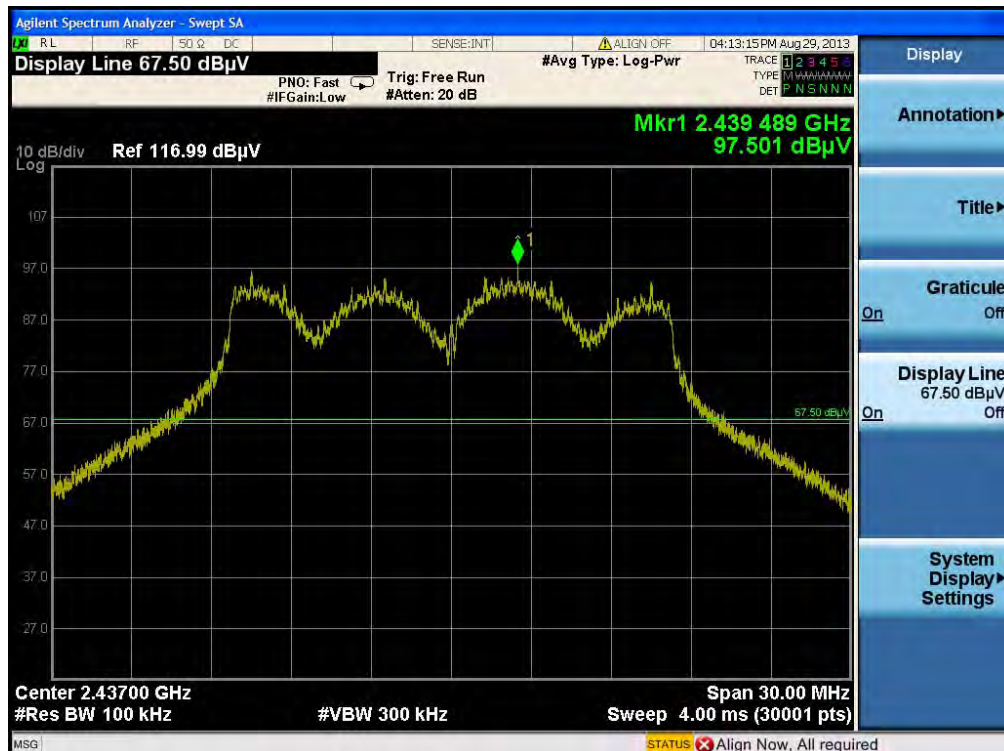


Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)



Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

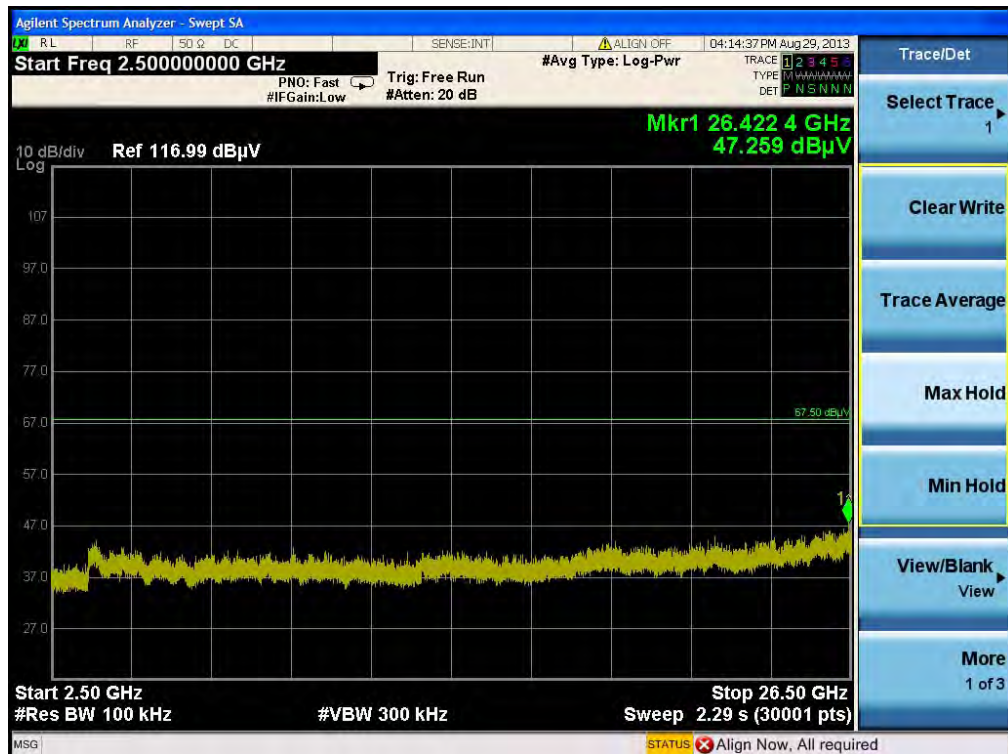

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

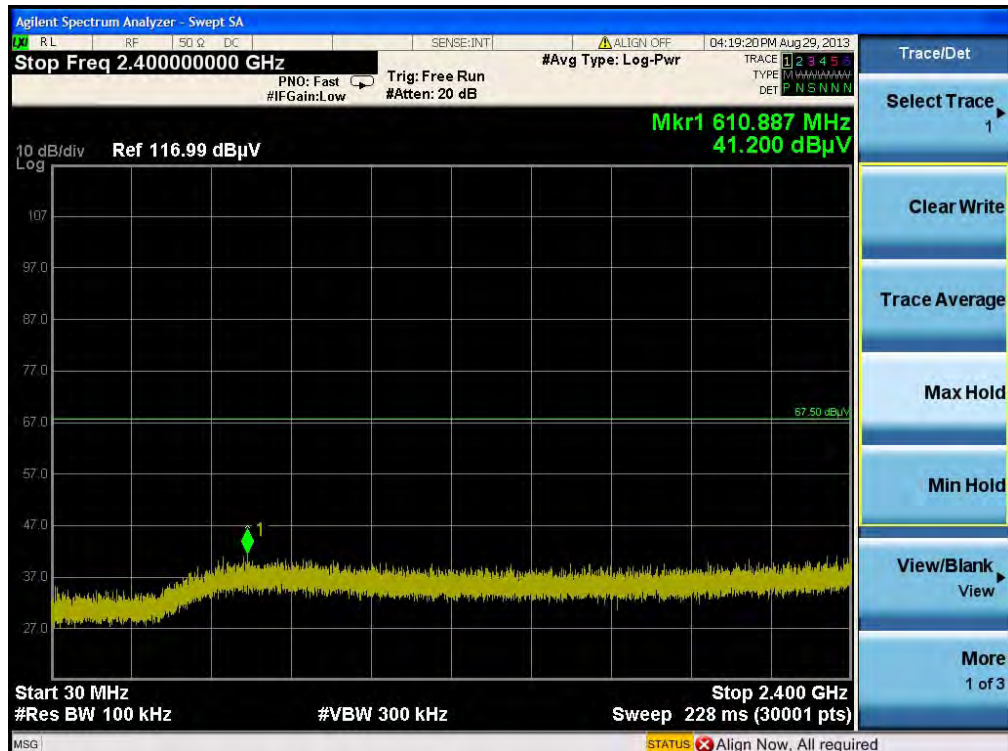

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)




Plot on Configuration IEEE 802.11a / Reference Level




Plot on Configuration IEEE 802.11a / CH 149 / 30MHz~5725MHz (down 30dBc)




Plot on Configuration IEEE 802.11a / CH 149 / 5850MHz~40000MHz (down 30dBc)

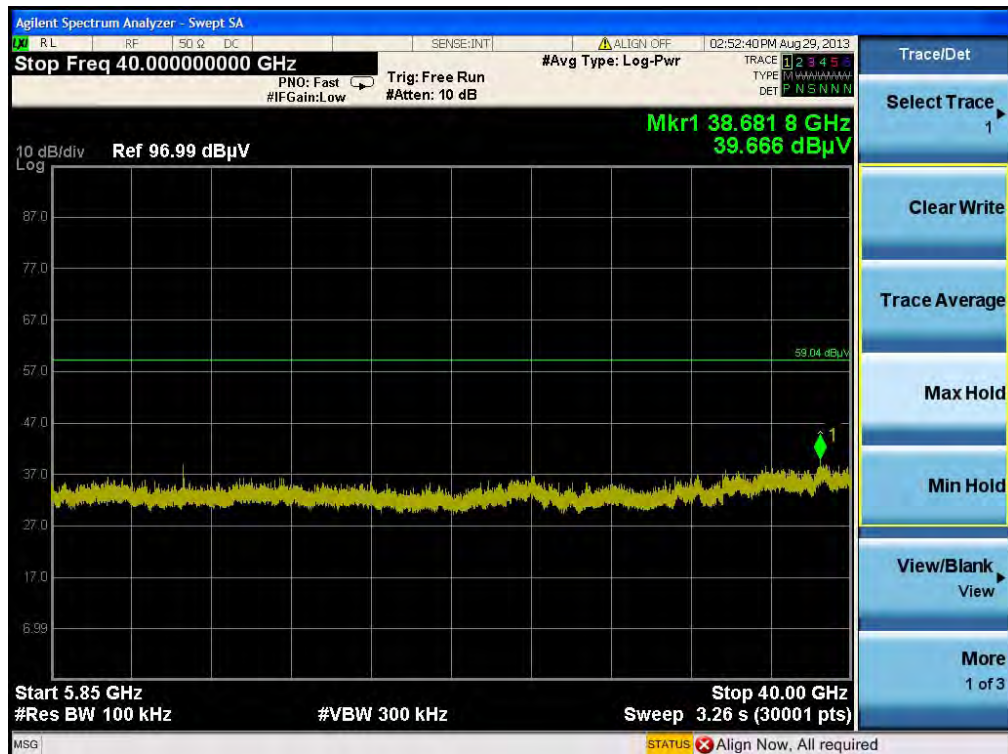

Plot on Configuration IEEE 802.11a / CH 165 / 30MHz~5725MHz (down 30dBc)

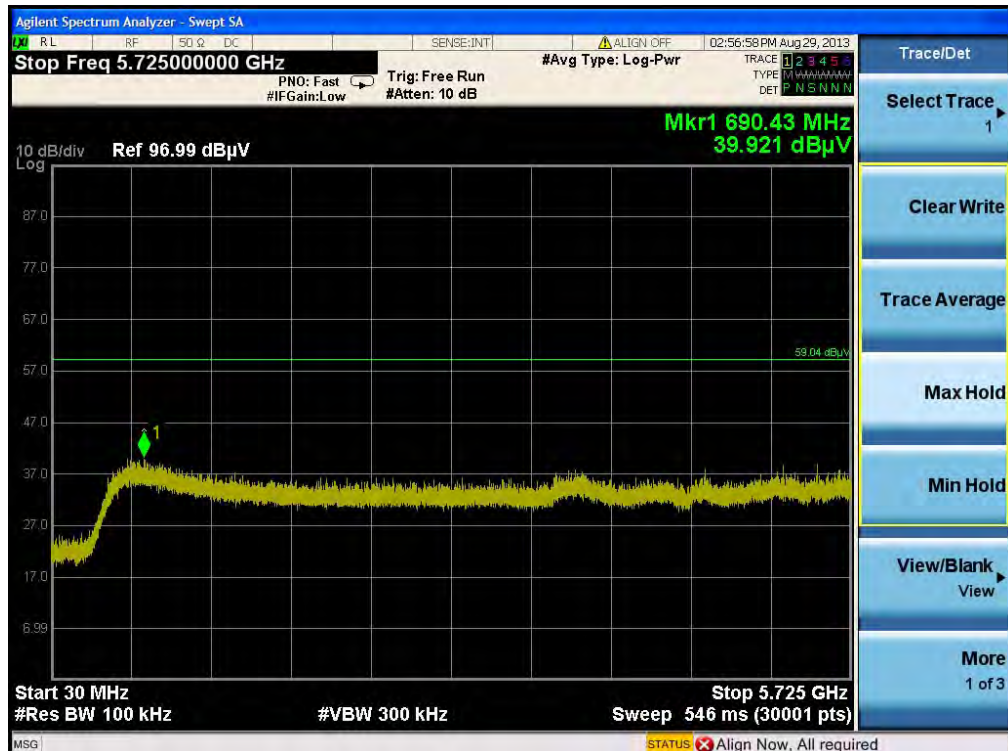

Plot on Configuration IEEE 802.11a / CH 165 / 5850MHz~40000MHz (down 30dBc)

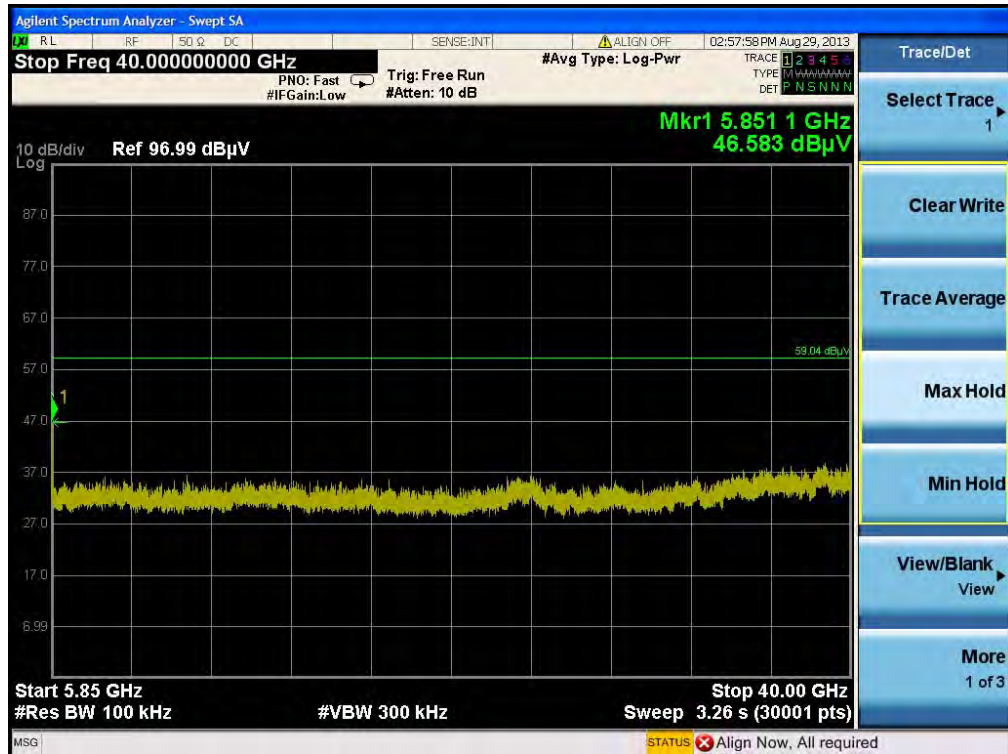

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Oct. 23, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 26, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Jul. 17, 2013	Conduction (CO01-CB)
Impulsbegrenzer Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz~30MHz	Feb. 21, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2012	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 30, 2013	Radiation (03CH01-CB)
Spectrum analyzer	Aglient	N9010A	MY52220557	9KHz~44GHz	Nov. 23, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz ~ 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz ~ 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Oct. 08, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz ~ 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz ~ 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz ~ 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz ~ 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz ~ 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 28, 2012	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 27, 2012	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. MEASUREMENT UNCERTAINTY

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.026	dB	normal(k=2)	0.013
Cable loss	0.002	dB	normal(k=2)	0.001
AMN/LISN specification	1.200	dB	normal(k=2)	0.600
Mismatch Receiver VSWR 1= AMN/LISN VSWR 2=	-0.080	dB	U-shaped	0.060
Combined standard uncertainty $U_c(y)$				1.2
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				2.4

Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	± 0.173	dB	K=1	0.086
Cable loss	± 0.174	dB	K=2	0.087
Antenna gain	± 0.169	dB	K=2	0.084
Site imperfection	± 0.433	dB	Triangular	0.214
Pre-amplifier gain	± 0.366	dB	K=2	0.183
Transmitter antenna	± 1.200	dB	Rectangular	0.600
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.778
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.555

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.191	dB	K=1	0.095
Cable loss	±0.169	dB	K=2	0.084
Antenna gain	±0.191	dB	K=2	0.096
Site imperfection	±0.582	dB	Triangular	0.291
Pre-amplifier gain	±0.304	dB	K=2	0.152
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.839
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.678

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.186	dB	K=1	0.093
Cable loss	±0.167	dB	K=2	0.083
Antenna gain	±0.190	dB	K=2	0.095
Site imperfection	±0.488	dB	Triangular	0.244
Pre-amplifier gain	±0.269	dB	K=2	0.134
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.771
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.541

Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	± 0.038	dB	K=2	0.019
Attenuator	± 0.047	dB	K=2	0.024
Power Meter specification	± 0.300	dB	Triangular	0.150
Power Sensor specification	± 0.300	dB	Rectangular	0.150
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				0.863
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				1.726