



SHENZHEN SETEK TECHNOLOGY CO., LTD.

FCC Report

Bluetooth

Product Description: Smart Phone

Trade Mark: Skyworth

Model No.: A076, GP353, SPA376

FCC ID: Q7Q-A076

Applicant: Shenzhen Skyworth Wireless Technology Co., Ltd.

Address: Unit A Rm 3A01, Skyworth Bldg, Gaoxin Ave 1S, Nanshan District, Shenzhen, China.

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2012

Test Date: 15 May ~ 31 May, 2013

Issued Date: 31 May, 2013

Test Result: Complied

James Wu
Laboratory Manager

The test result in this test report relate only to the tested samples in this report .


This report shall not be reproduced except in full without the written approval of Shenzhen SETEK technology co., ltd.

2 Version

Version No.	Date	Description
00	31 May, 2013	Original

Prepared By:

Young Li
Project Engineer**Date:**31 May, 2013

Check By:

Dixon Hao
Reviewer**Date:**31 May, 2013

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST MODE	6
5.4 TEST FACILITY	6
5.5 TEST LOCATION	6
6 TEST INSTRUMENTS LIST	7
7 MEASUREMENT DATA AND TEST RESULTS	8
7.1 ANTENNA REQUIREMENT	8
7.2 CONDUCTED EMISSIONS	9
7.3 CONDUCTED PEAK OUTPUT POWER	12
7.4 20dB OCCUPY BANDWIDTH	16
7.5 CARRIER FREQUENCIES SEPARATION	20
7.6 HOPPING CHANNEL NUMBER	25
7.7 DWELL TIME	26
7.8 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	28
7.9 BAND EDGE	29
7.9.1 Conducted Emission Method	29
7.9.2 Radiated Emission Method	31
7.10 SPURIOUS EMISSION	33
7.10.1 Conducted Emission Method	33
7.10.2 Radiated Emission Method	35

4 Test Summary

Test Item	Test Method	Result
Antenna Requirement	15.203/15.247 (c)	Complied
Conducted Emission	15.207	Complied
Conducted Peak Output Power	15.247 (b)(1)	Complied
20dB Occupied Bandwidth	15.247 (a)(1)	Complied
Carrier Frequencies Separation	15.247 (a)(1)	Complied
Hopping Channel Number	15.247 (a)(1)	Complied
Dwell Time	15.247 (a)(1)	Complied
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List	Complied
Radiated Emission	15.205/15.209	Complied

Complied: The EUT has complied with the essential requirements in the standard.

5 General Information

5.1 Client Information

Applicant:	Shenzhen Skyworth Wireless Technology Co., Ltd.
Address:	Unit A Rm 3A01, Skyworth Bldg, Gaoxin Ave 1S, Nanshan District, Shenzhen, China.
Manufacturer:	Shenzhen Skyworth Wireless Technology Co., Ltd.
Address:	Unit A Rm 3A01, Skyworth Bldg, Gaoxin Ave 1S, Nanshan District, Shenzhen, China.
Factory:	Shenzhen Skyworth Wireless Technology Co., Ltd.
Address:	Unit A Rm 3A01, Skyworth Bldg, Gaoxin Ave 1S, Nanshan District, Shenzhen, China.

5.2 General Description of EUT

Product Name:	Smart Phone
Brand Mark:	Skyworth
Model No.:	A076, GP353, SPA376
Test model No.:	A076
Software Version:	4.0.4
Hardware Version:	A076_MAIN_PCB_V1.0
Bluetooth	
Bluetooth Version:	V2.1+EDR
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	Frequency Hopping Spread Spectrum (FHSS)
Modulation technology:	GFSK, Pi/4QPSK, 8DPSK
Antenna Type:	Integral Antenna
Antenna Gain:	-1.00dBi (declare by Applicant)
AC Adapter:	Model: SW-0018 Input: AC 100~240V 50/60Hz 0.5A Output: DC 5.0V 1.0A
Power supply:	lithium-ion charge battery 3.7V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
Lowest channel	2402
Middle channel	2441
Highest channel	2480

5.3 Test Mode

Bluetooth mode	Keep the EUT in communicating mode with Bluetooth device.
Non-hopping mode	Keep the EUT in continuously transmitting mode of modulation with the fix frequency.
Hopping mode	Keep the EUT in continuously transmitting mode of modulation with hopping.

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS —Registration No.: CNAS L5775**
CNAS has accredited Global United Technology Services Co., Ltd. to ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.
- **FCC —Registration No.: 600491**
Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010.
- **Industry Canada (IC) —Registration No.: 9079A-1**
The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

6 Test Instruments list

Instrument	Manufacturer	Model No.	Inventory No.	Next Cal. Date
3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 28 2014
Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A
EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 02 2013
BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Feb. 23 2014
Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2013
Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 28 2014
EMI Test Software	AUDIX	E3	N/A	N/A
Coaxial Cable	GTS	N/A	GTS213	Mar. 29 2014
Coaxial Cable	GTS	N/A	GTS211	Mar. 29 2014
Coaxial cable	GTS	N/A	GTS210	Mar. 29 2014
Coaxial Cable	GTS	N/A	GTS212	Mar. 29 2014
Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jul. 02 2013
Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jul. 02 2013
Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2013
Band filter	Amindeon	82346	GTS219	Mar. 29 2014
Universal radio communication tester	Rohde & Schwarz	CMU200	GTS235	May 10 2014
Signal Generator	Rohde & Schwarz	SML03	GTS236	May 10 2014
Temp. Humidity/ Barometer	Oregon Scientific	BA-888	GTS248	May 10 2014
D.C. Power Supply	Instek	PS-3030	GTS232	NA
Splitter	Agilent	11636B	GTS237	May 10 2014

Conducted Emission				
Instrument	Manufacturer	Model No.	Inventory No.	Next Cal. Date
Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Sep. 07 2013
EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	Jul. 02 2013
10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	Jul. 02 2013
Coaxial Switch	ANRITSU CORP	MP59B	GTS225	Jul. 02 2013
LISN	SCHWARZBECK MESS- ELEKTRONIK	NSLK 8127	GTS226	Jul. 02 2013
Coaxial Cable	GTS	N/A	GTS227	Jul. 02 2013
EMI Test Software	AUDIX	E3	N/A	N/A
Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Sep. 07 2013
EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	Jul. 02 2013

7 Measurement Data and Test Results

7.1 Antenna requirement

Standard requirement

According to Standard: FCC Part15 C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

EUT Antenna:

The antenna is unique integral Antenna, the typical gain of the antenna is -1dBi.

7.2 Conducted Emissions

☞ Standard requirement

FCC Part15 C Section 15.207

☞ Test method

ANSI C63.4:2003

☞ Receiver set

RBW=9KHz, VBW=30KHz, Sweep time=auto


☞ Limit

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

☞ Test mode

Refer to section 5.3 for details

☞ Test setup

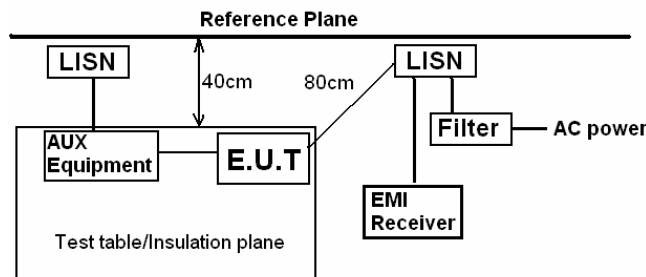

Remark:
E.U.T.: Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height=0.8m


☞ Test mode

1. The E.U.T. and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.
2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).
3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.

☞ Test Result

Complied

Test mode:	Bluetooth + Charging mode	Temperature:	24~26°C
Phase Polarity:	Line	Relative Humidity:	50~53%

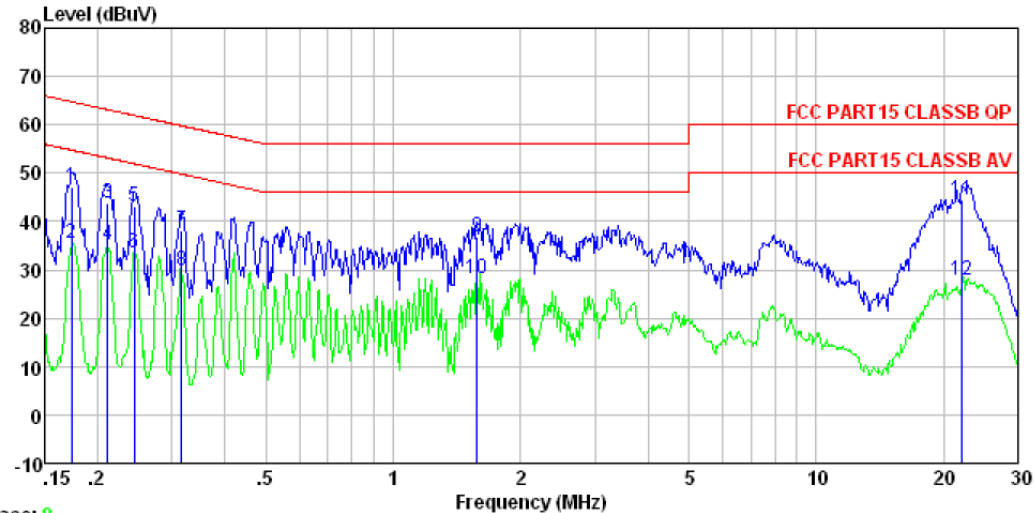

Trace: 8

Condition : FCC PART15 CLASSB QP LISN-2012 LINE


Model No.: A076

Test mode: Bluetooth + charging mode

Test Engineer:: Yang

	Read Freq	LISN Level	Cable Factor	Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.174	47.18	-0.23	0.10	47.05	64.77	-17.72	QP
2	0.174	35.67	-0.23	0.10	35.54	54.77	-19.23	Average
3	0.212	43.96	-0.23	0.10	43.83	63.14	-19.31	QP
4	0.212	35.15	-0.23	0.10	35.02	53.14	-18.12	Average
5	0.244	43.19	-0.23	0.10	43.06	61.95	-18.89	QP
6	0.244	33.76	-0.23	0.10	33.63	51.95	-18.32	Average
7	0.317	38.18	-0.22	0.10	38.06	59.80	-21.74	QP
8	0.317	29.88	-0.22	0.10	29.76	49.80	-20.04	Average
9	1.577	36.96	-0.23	0.10	36.83	56.00	-19.17	QP
10	1.577	28.35	-0.23	0.10	28.22	46.00	-17.78	Average
11	22.180	44.81	-0.70	0.21	44.32	60.00	-15.68	QP
12	22.180	28.43	-0.70	0.21	27.94	50.00	-22.06	Average

Test mode:	Bluetooth + Charging mode	Temperature:	24~26°C
Phase Polarity:	Nertral	Relative Humidity:	50~53%

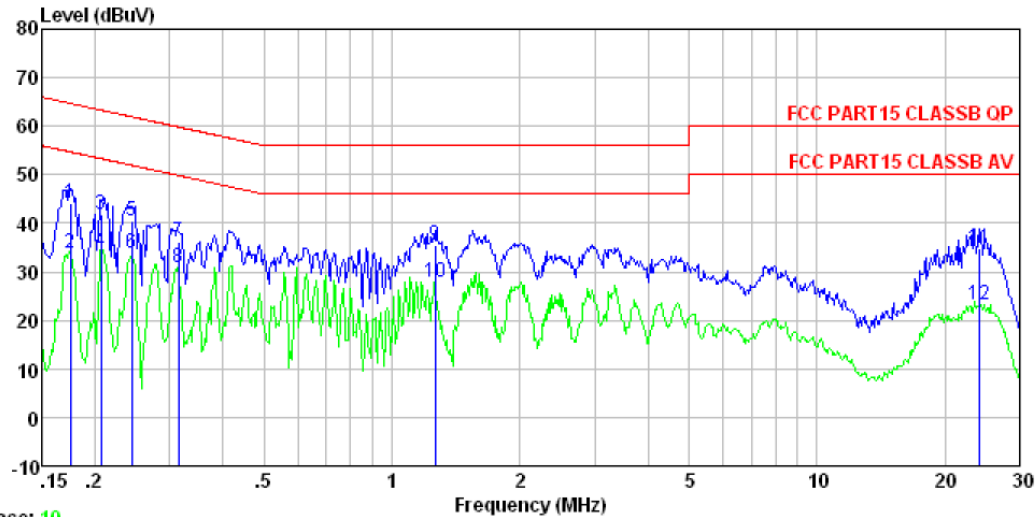

Trace: 10
Condition : FCC PART15 CLASSB QP LISN-2012 NEUTRAL
Model No.: : A076
Test mode : Bluetooth + Charging mode
Test Engineer: Yang

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.175	44.03	-0.09	0.10	44.04	64.72	-20.68	QP
2	0.175	33.75	-0.09	0.10	33.76	54.72	-20.96	Average
3	0.207	41.78	-0.09	0.10	41.79	63.32	-21.53	QP
4	0.207	34.15	-0.09	0.10	34.16	53.32	-19.16	Average
5	0.244	40.35	-0.09	0.10	40.36	61.95	-21.59	QP
6	0.244	33.84	-0.09	0.10	33.85	51.95	-18.10	Average
7	0.315	36.11	-0.09	0.10	36.12	59.84	-23.72	QP
8	0.315	30.95	-0.09	0.10	30.96	49.84	-18.88	Average
9	1.262	35.38	-0.09	0.10	35.39	56.00	-20.61	QP
10	1.262	27.74	-0.09	0.10	27.75	46.00	-18.25	Average
11	24.015	35.31	-0.72	0.21	34.80	60.00	-25.20	QP
12	24.015	23.85	-0.72	0.21	23.34	50.00	-26.66	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss

7.3 Conducted Peak Output Power

Standard requirement

FCC Part15 C Section 15.247 (b)(3)

Test method

ANSI C63.4:2003 and KDB DA00-705

Receiver set

RBW=1MHz, VBW=1MHz, Detector=Peak


Limit

30dBm

Test mode

Refer to section 5.3 for details

Test setup

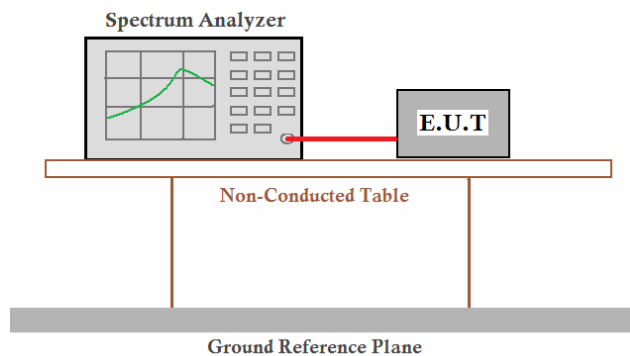

Test Result

Complied


Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	5.45	30.00	Pass
Middle	5.61	30.00	Pass
Highest	4.51	30.00	Pass
Pi/4QPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	4.74	30.00	Pass
Middle	4.97	30.00	Pass
Highest	3.91	30.00	Pass
8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	4.74	30.00	Pass
Middle	4.97	30.00	Pass
Highest	3.96	30.00	Pass


Modulation

GFSK


Lowest channel:

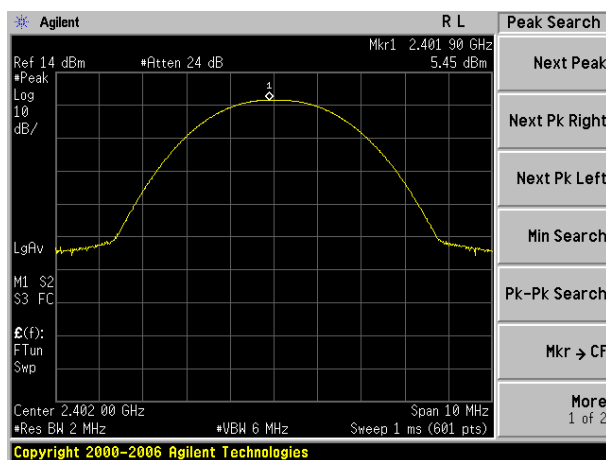

Middle channel:

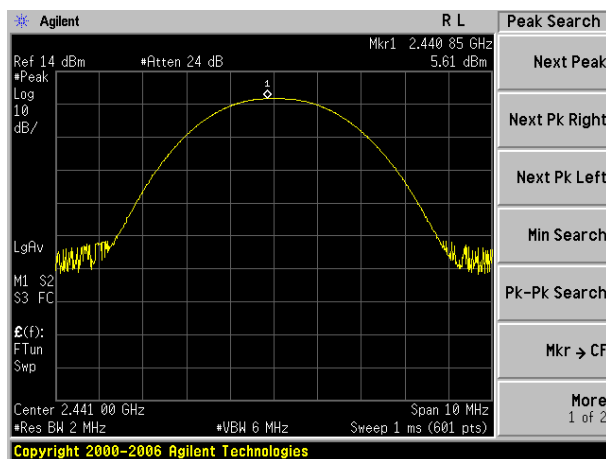


Highest channel:

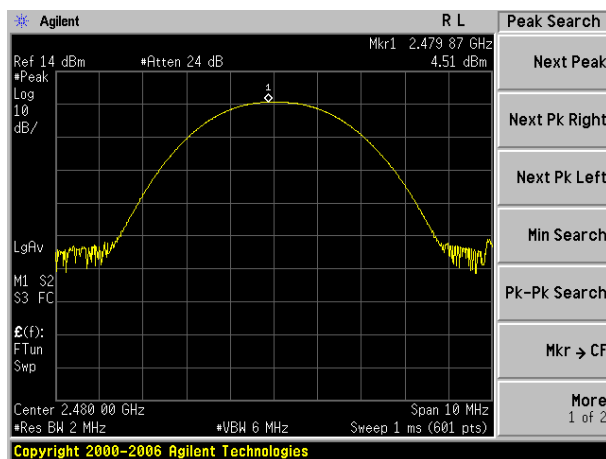


Modulation

Pi/4QPSK


Lowest channel:

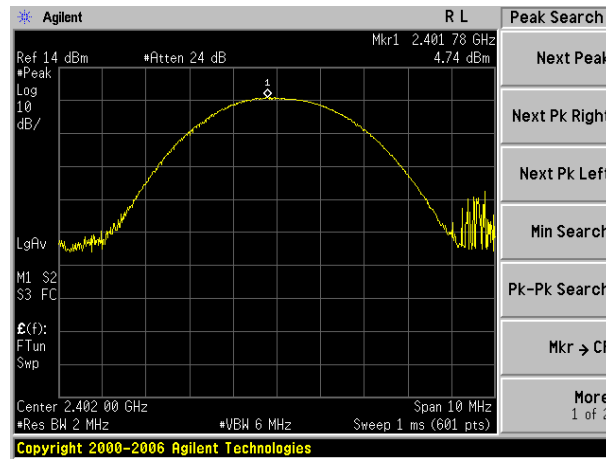

Middle channel:

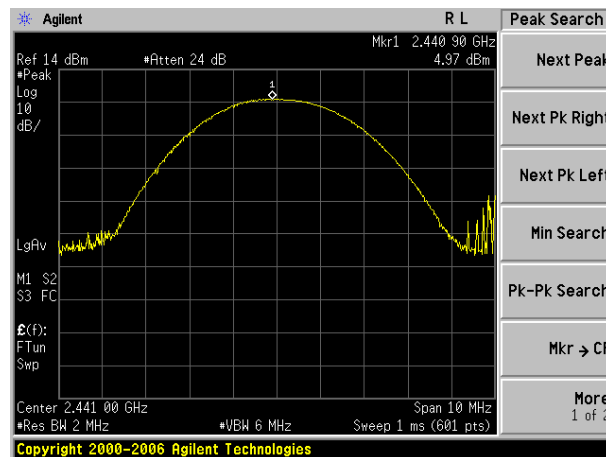


Highest channel:

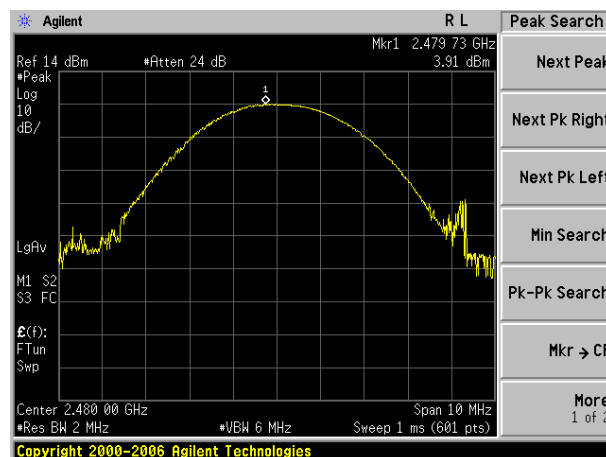


Modulation

8DPSK


Lowest channel:

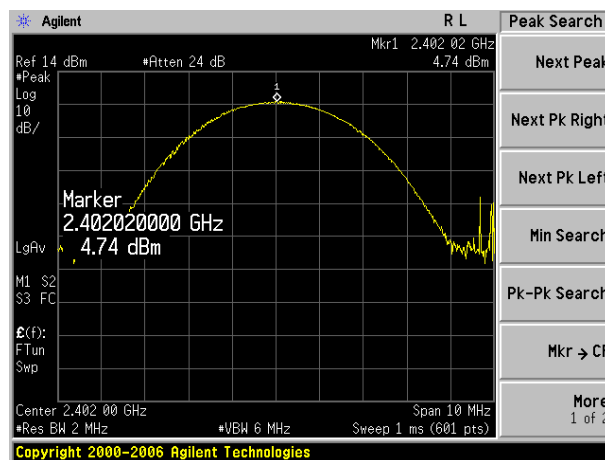

Middle channel:

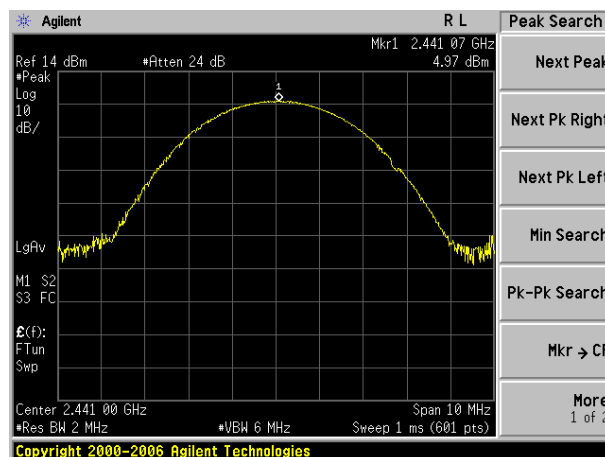

Highest channel:

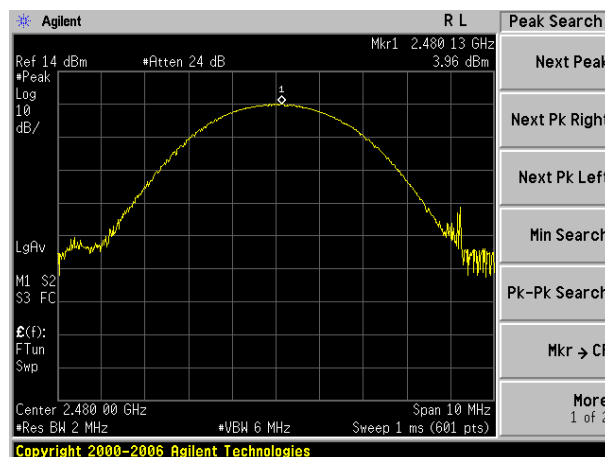

7.4 20dB Occupy Bandwidth

☞ Standard requirement

FCC Part15 C Section 15.247 (a)(1)

☞ Test method

ANSI C63.4:2003 and KDB DA00-705

☞ Receiver set

RBW=100KHz, VBW=300KHz,detector=Peak


☞ Limit

NA

☞ Test mode

Refer to section 5.3 for details

☞ Test setup

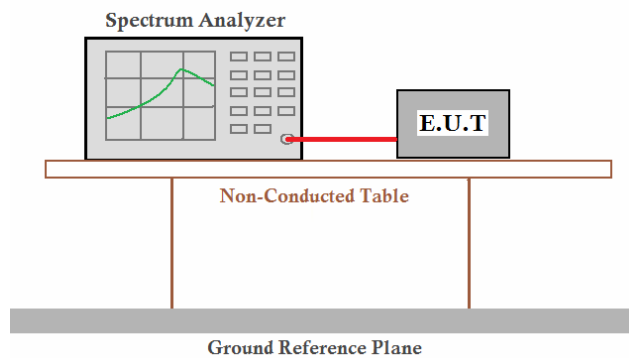

☞ Test Result

Complied


Measurement Data

Test channel	20dB Occupy Bandwidth (KHz)		
	GFSK	Pi/4QPSK	8DPSK
Lowest	1090	1275	1313
Middle	1097	1277	1313
Highest	1091	1281	1318


Modulation

GFSK


Lowest channel:

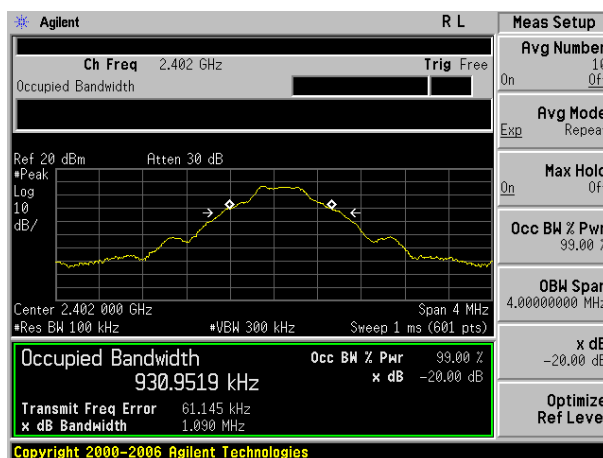

Middle channel:

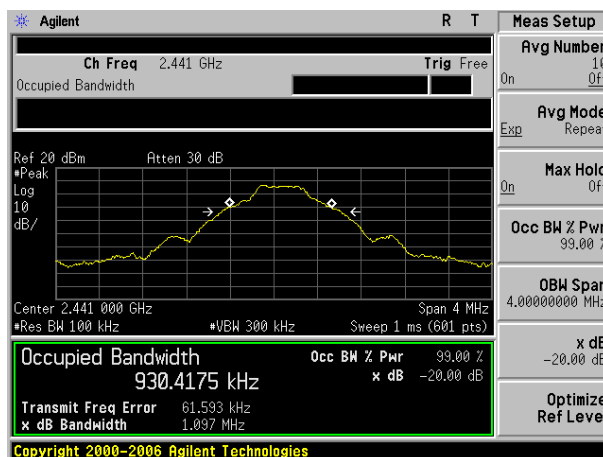


Highest channel:

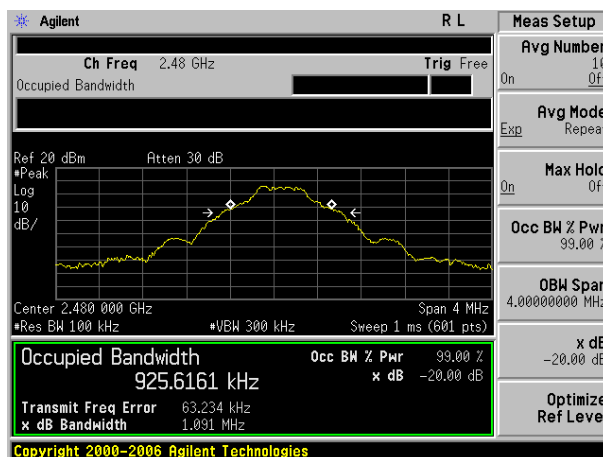


Modulation

Pi/4QPSK


Lowest channel:

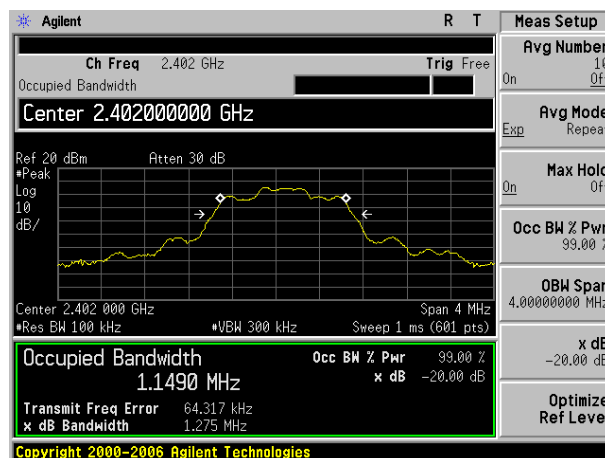

Middle channel:

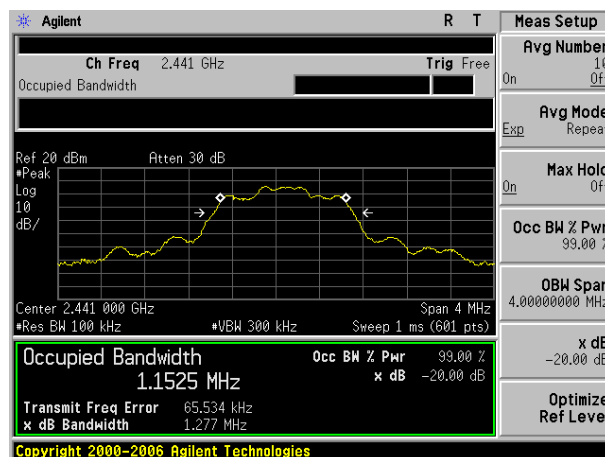


Highest channel:

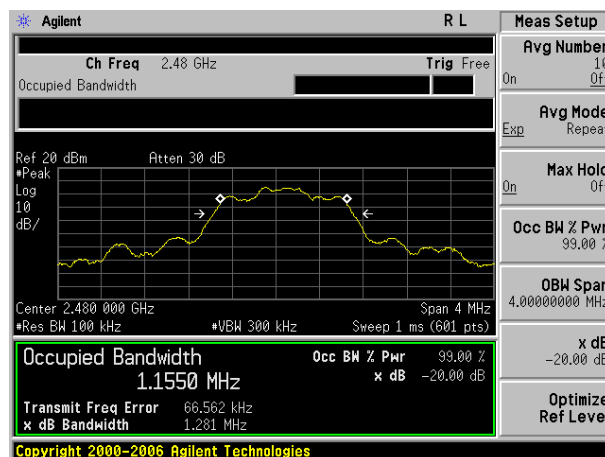


Modulation

8DPSK


Lowest channel:

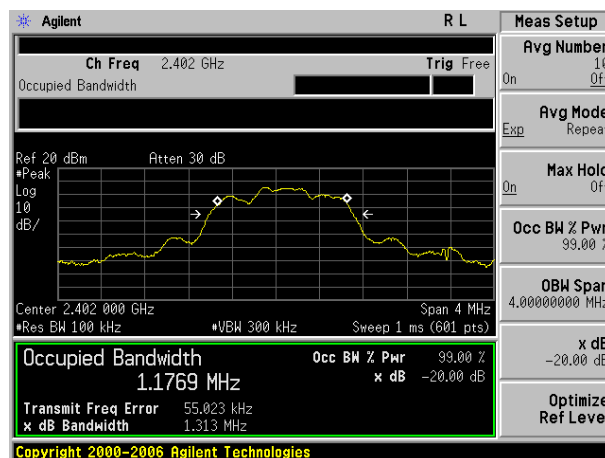

Middle channel:

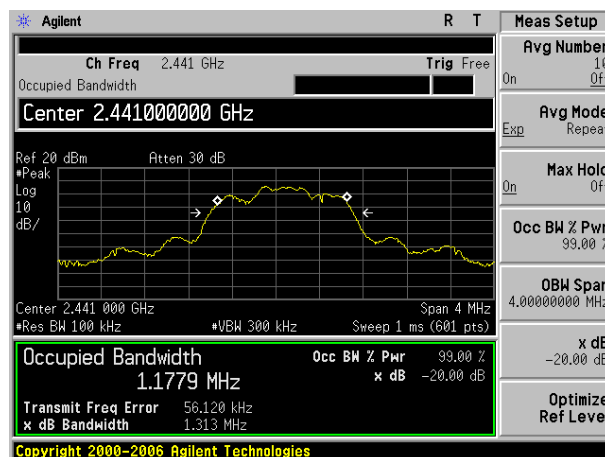

Highest channel:

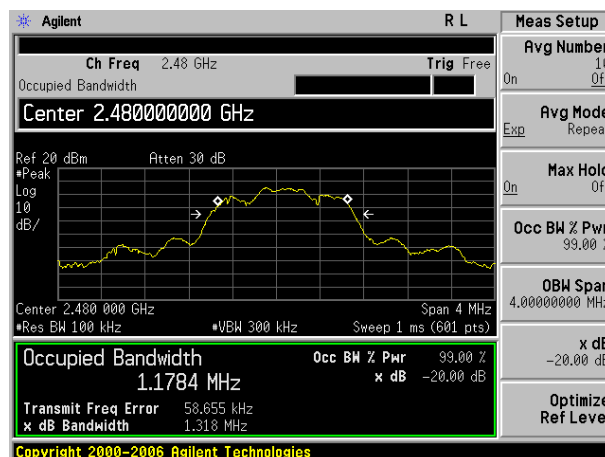

7.5 Carrier Frequencies Separation

☞ Standard requirement

FCC Part15 C Section 15.247 (a)(1)

☞ Test method

ANSI C63.4:2003 and KDB DA00-705

☞ Receiver set

RBW=100KHz, VBW=300KHz, detector=Peak


☞ Limit

0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)

☞ Test mode

Refer to section 5.3 for details

☞ Test setup

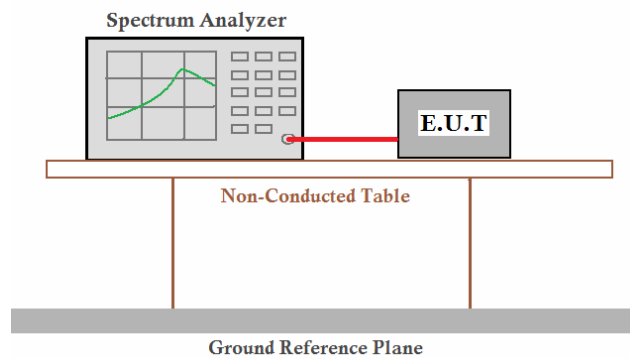

☞ Test Result

Complied

Measurement Data

GFSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1000	731.3	Pass
Middle	1087	731.3	Pass
Highest	1000	731.3	Pass
Pi/4QPSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1093	854.0	Pass
Middle	1003	854.0	Pass
Highest	1007	854.0	Pass
8DPSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1013	878.7	Pass
Middle	1003	878.7	Pass
Highest	1003	878.7	Pass


Note: According to section 6.3

Mode	20dB bandwidth (KHz) (worse case)	Limit (KHz) (Carrier Frequencies Separation)
GFSK	1097	731.3
PI/4QPSK	1281	854.0
8DPSK	1318	878.7


Modulation

GFSK


Lowest channel:

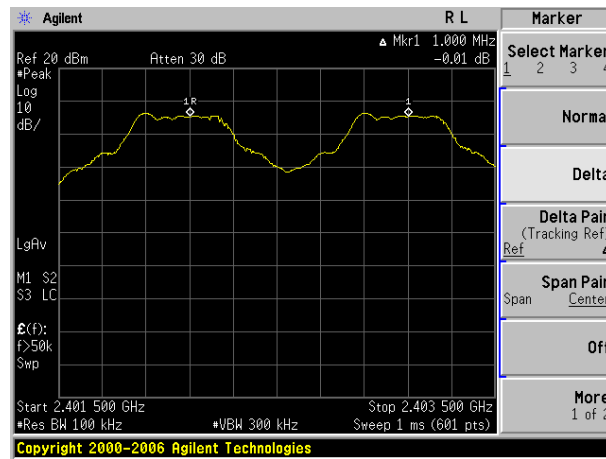

Middle channel:

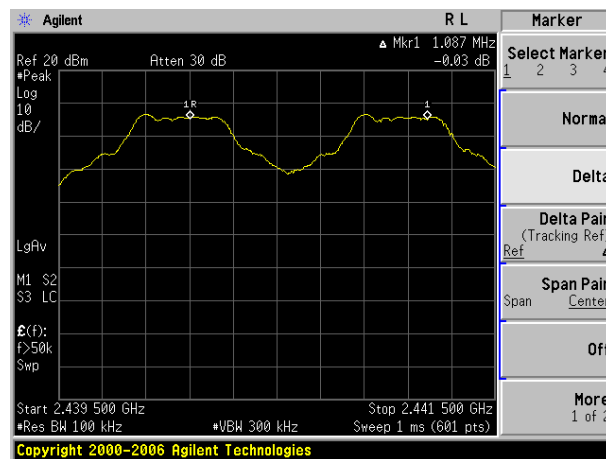


Highest channel:

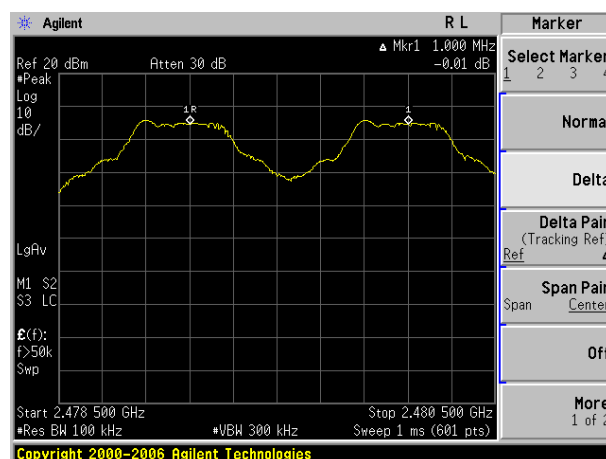


Modulation

Pi/4QPSK


Lowest channel:

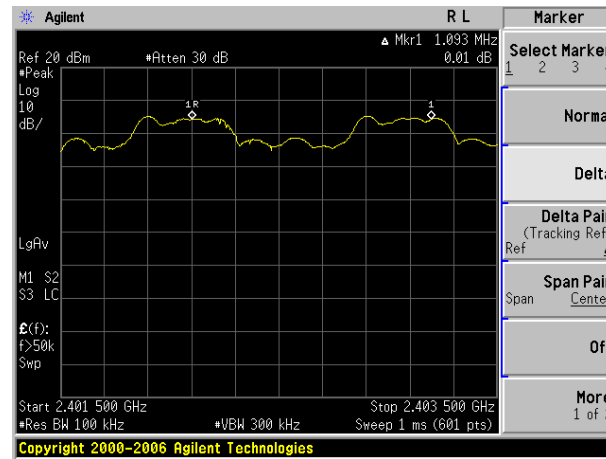

Middle channel:

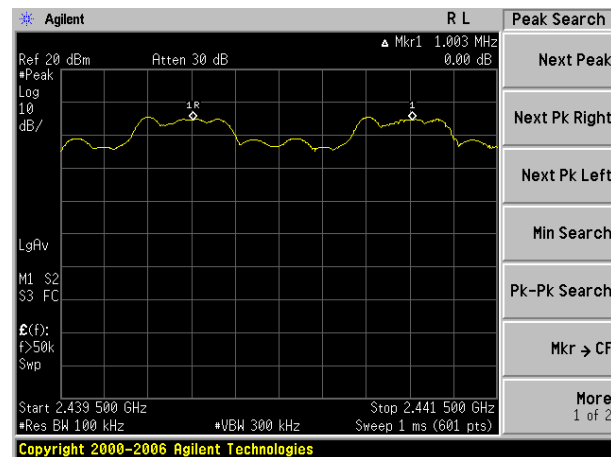


Highest channel:

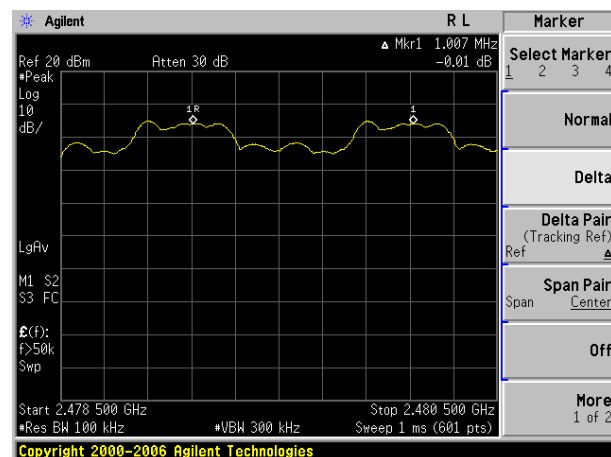


Modulation

8DPSK


Lowest channel:

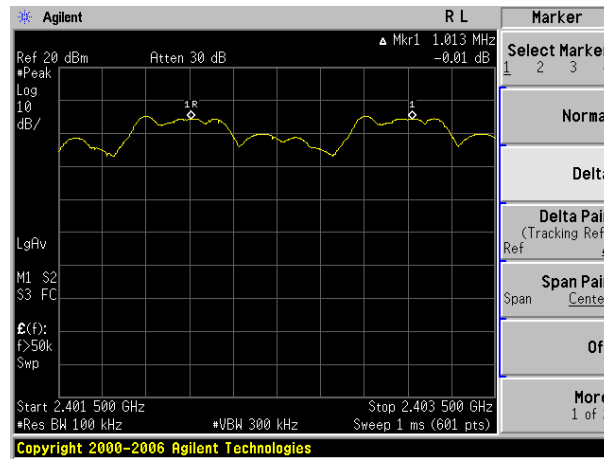

Middle channel:

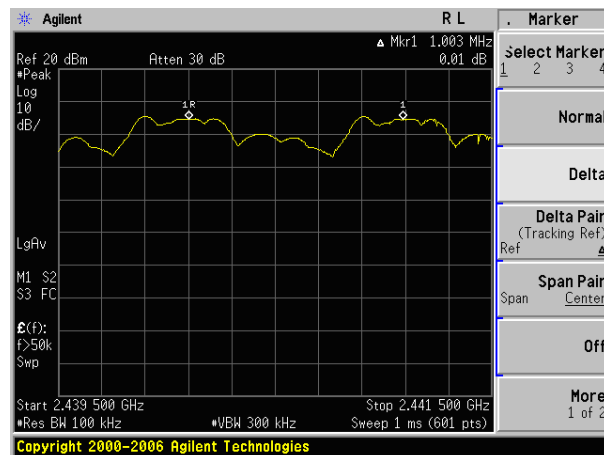

Highest channel:

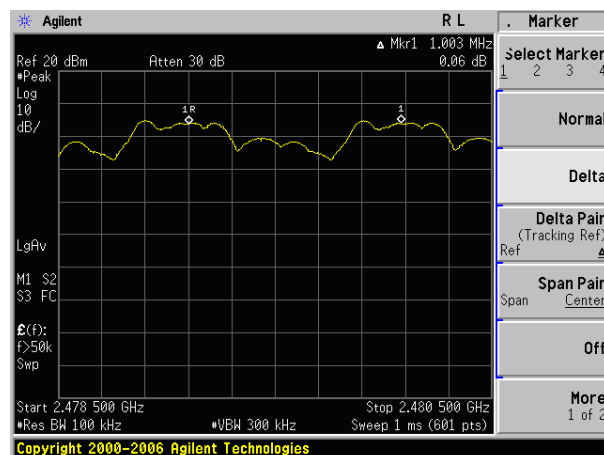

7.6 Hopping Channel Number

Standard requirement

FCC Part15 C Section 15.247 (a)(1)

Test method

ANSI C63.4:2003 and KDB DA00-705

Receiver set

RBW=100KHz, VBW=300KHz, detector=Peak


Limit

15channels

Test mode

Refer to section 5.3 for details

Test setup

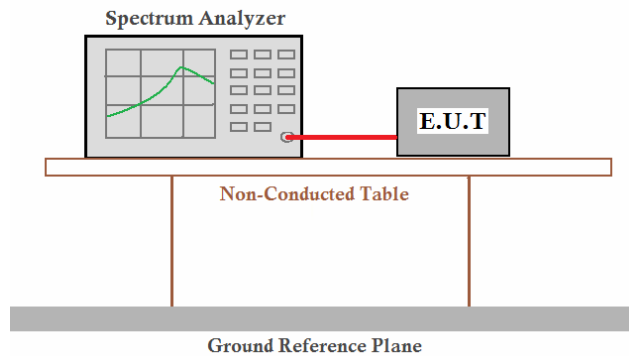


Test Result

Complied

Measurement Data

Mode	Hopping channel numbers	Limit	Result
GFSK Pi/4QPSK 8DPSK	79	15	Pass

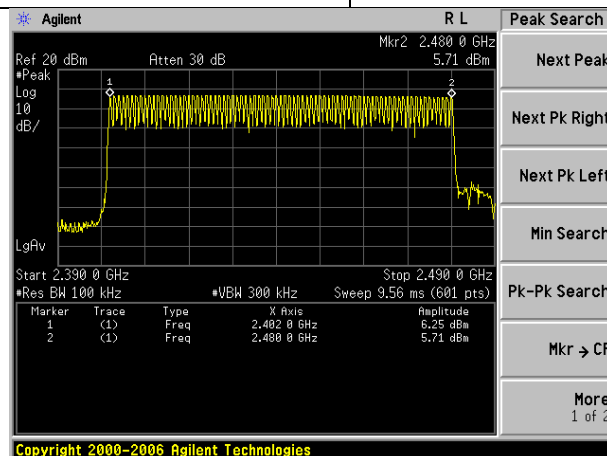

7.7 Dwell time

☞ Standard requirement

FCC Part15 C Section 15.247 (a)(1)

☞ Test method

ANSI C63.4:2003 and KDB DA00-705

☞ Receiver set

RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak


☞ Limit

0.4 Second

☞ Test mode

Refer to section 5.3 for details

☞ Test setup

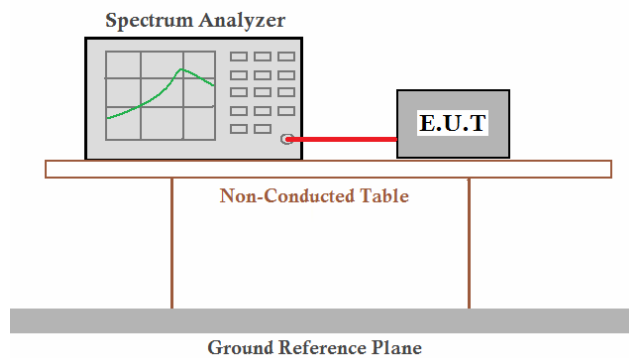

☞ Test Result

Complied

Measurement Data

Mode	Packet	Dwell time (Second)	Limit (Second)	Result
GFSK	DH1/2-DH1/3-DH1	0.1226	0.40	Pass
Pi/4QPSK	DH3/2-DH3/3-DH3	0.2600	0.40	Pass
8DPSK	DH5/2-DH5/3-DH5	0.2987	0.40	Pass


Dwell time

DH1/2-DH1/3-DH1: Dwell time = On time*(1600/(2*79))*31.6S=320*383.8us=122.8ms


DH3/2-DH3/3-DH3: Dwell time = On time *(1600/(4*79))*31.6S=160*1.625ms=260ms

DH5/2-DH5/3-DH5: Dwell time = On time *(1600/(6*79))*31.6S=320/3*2.80ms=298.7ms


DH1/2-DH1/3-DH1:

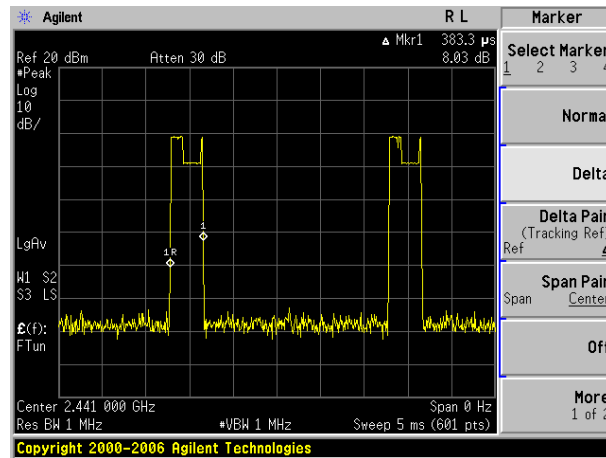

DH3/2-DH3/3-DH3:

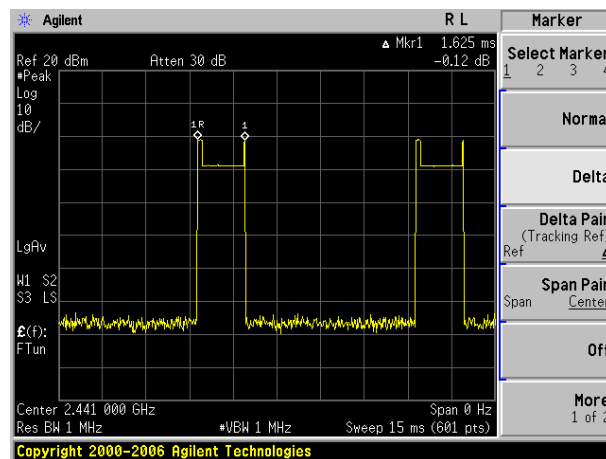

DH5/2-DH5/3-DH5:

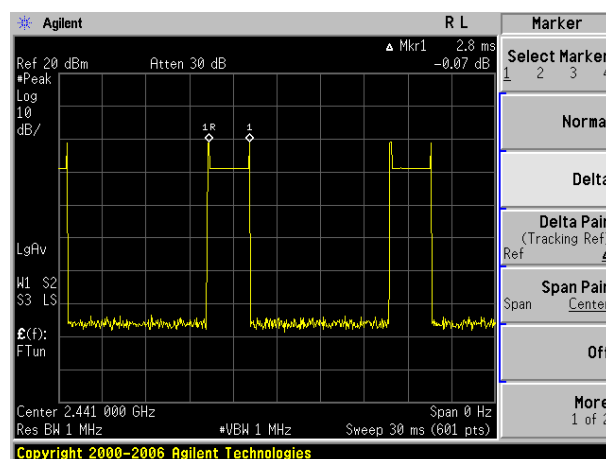

7.8 Pseudorandom Frequency Hopping Sequence

☞ Standard requirement

FCC Part15 C Section 15.247 (a)(1)


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

☞ EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

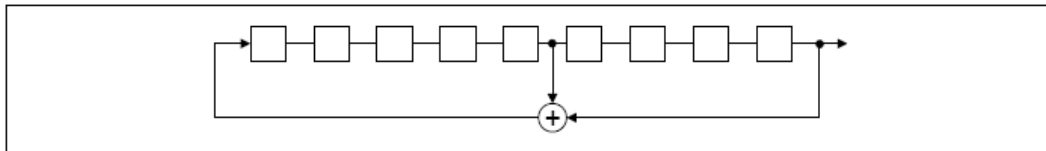

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

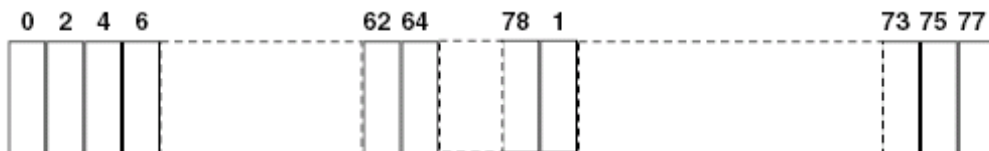

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

7.9 Band Edge

7.9.1 Conducted Emission Method

☞ Test method

FCC Part15 C Section 15.247 (d)

☞ Test method

ANSI C63.4:2003 and KDB DA00-705

☞ Receiver set

RBW=100kHz, VBW=300kHz, Detector=Peak


☞ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

☞ Test mode

Refer to section 5.3 for details

☞ Test setup

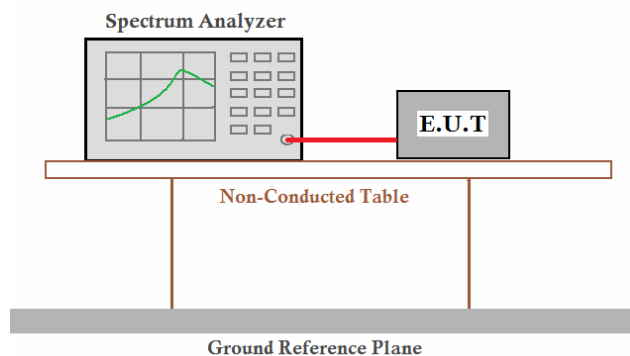


☞ Test Result

Complied

Remark:


During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case, so only show the test data of worse case modulation on the test report.

Test channel:

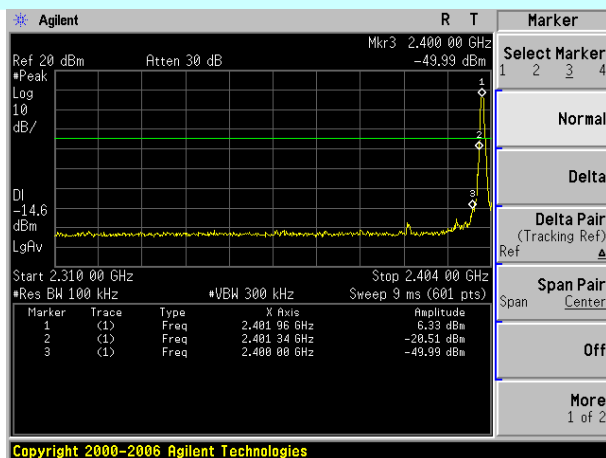


No-hopping mode

Lowest channel

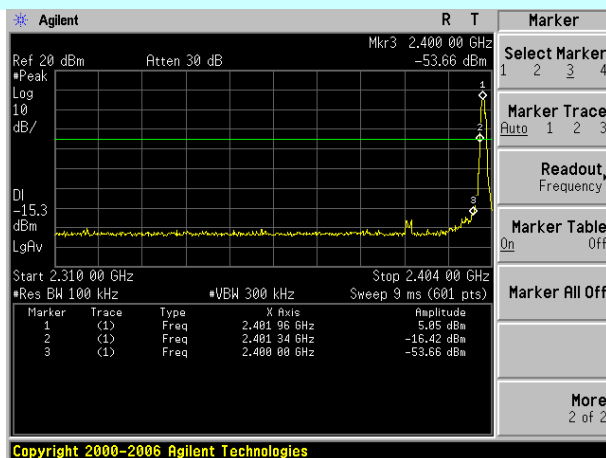


Hopping mode

Test channel:

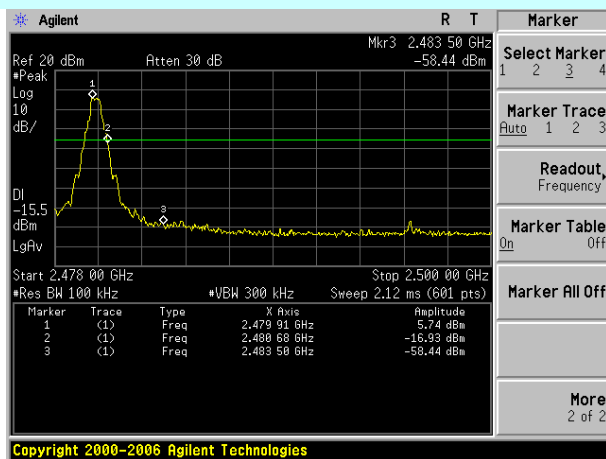

No-hopping mode

Highest channel

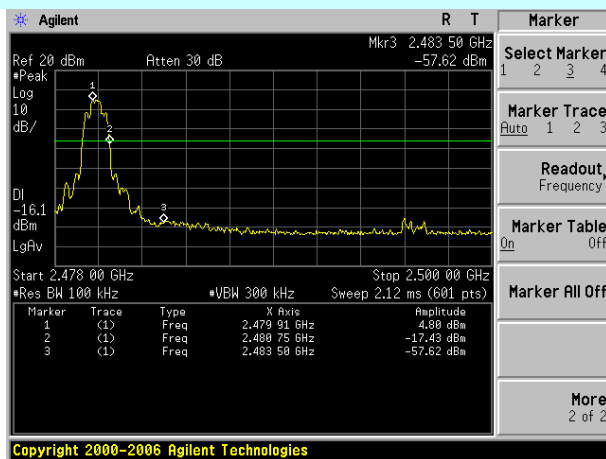

Hopping mode

7.9.2 Radiated Emission Method

☞ Test method

FCC Part15 C Section 15.209 and 15.205

☞ Test method

ANSI C63.4:2003

☞ Receiver set

Frequency	Detector	RBW	VBW	Remark
Above 1GHz	Peak	1MHz	3MHz	Peak Value
	Peak	1MHz	10Hz	Average Value


☞ Limit

Frequency	Limit (dBuV/m @3m)	Remark
Above 1GHz	54.00	Average Value
	74.00	Peak Value

☞ Test mode

Refer to section 5.3 for details

☞ Test setup

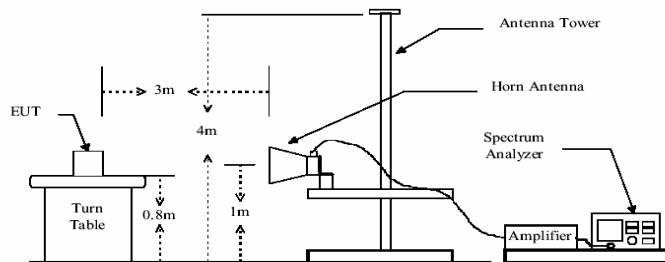

☞ Test Procedure

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

☞ Test Result

Complied

Remark:

During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case, so only show the test data of worse case modulation on the test report.

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	50.33	27.25	3.84	34.81	46.61	74.00	-27.39	Vertical
2390.00	54.91	27.38	3.91	34.83	51.37	74.00	-22.63	Vertical
2310.00	48.57	27.25	3.84	34.81	44.85	74.00	-29.15	Horizontal
2390.00	52.14	27.38	3.91	34.83	48.60	74.00	-25.40	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	40.28	27.25	3.84	34.81	36.56	54.00	-17.44	Vertical
2390.00	43.18	27.38	3.91	34.83	39.64	54.00	-14.36	Vertical
2310.00	38.72	27.25	3.84	34.81	35.00	54.00	-19.00	Horizontal
2390.00	41.16	27.38	3.91	34.83	37.62	54.00	-16.38	Horizontal

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	53.80	27.32	3.99	34.86	50.25	74.00	-23.75	Vertical
2500.00	50.86	27.35	4.00	34.87	47.34	74.00	-26.66	Vertical
2483.50	55.64	27.32	3.99	34.86	52.09	74.00	-21.91	Horizontal
2500.00	51.62	27.35	4.00	34.87	48.10	74.00	-25.90	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	41.89	27.32	3.99	34.86	38.34	54.00	-15.66	Vertical
2500.00	37.29	27.35	4.00	34.87	33.77	54.00	-20.23	Vertical
2483.50	39.51	27.32	3.99	34.86	35.96	54.00	-18.04	Horizontal
2500.00	35.16	27.35	4.00	34.87	31.64	54.00	-22.36	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10 Spurious Emission

7.10.1 Conducted Emission Method

☞ Test method

FCC Part15 C Section 15.247 (d)

☞ Test method

ANSI C63.4:2003 and KDB DA00-705

☞ Receiver set

RBW=100kHz, VBW=300kHz, Detector=Peak


☞ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

☞ Test mode

Refer to section 5.3 for details

☞ Test setup

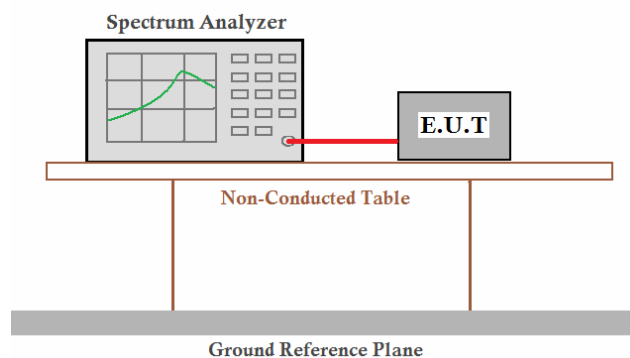


☞ Test Result

Complied

Remark:


During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case, so only show the test data of worse case modulation on the test report.

Test channel:

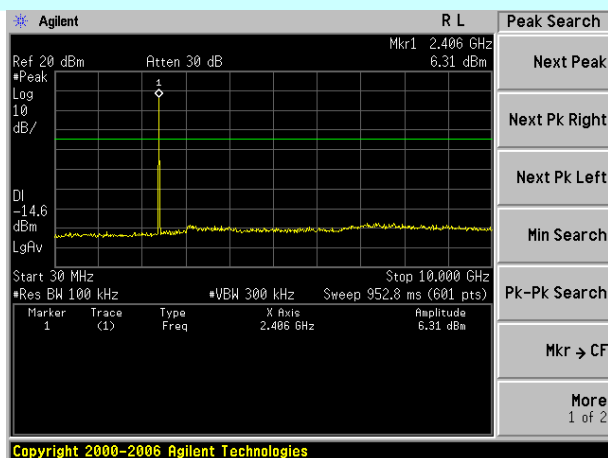


30MHz~10GHz

Lowest channel

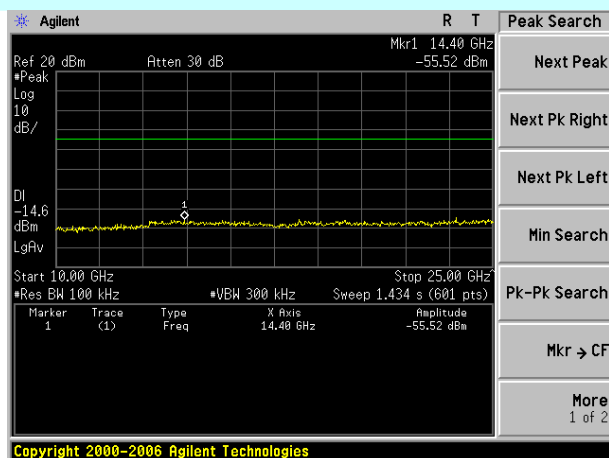


10GHz~25GHz

Test channel:

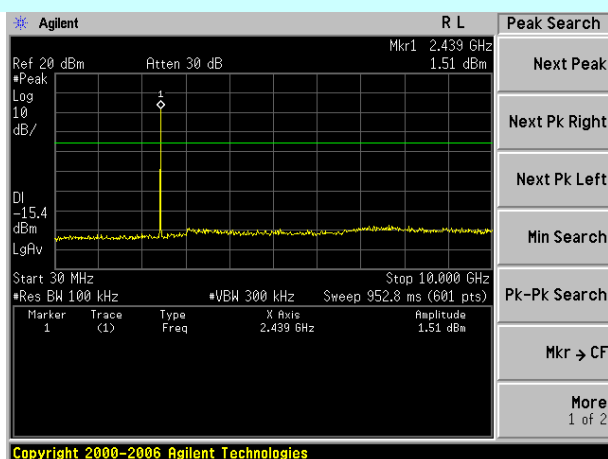


30MHz~10GHz

Middle channel

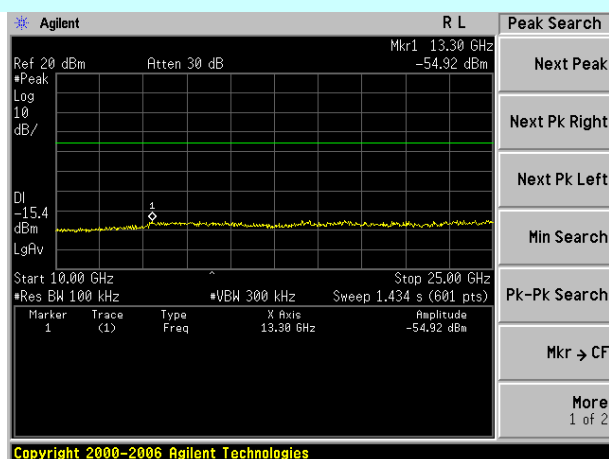


10GHz~25GHz

Test channel:

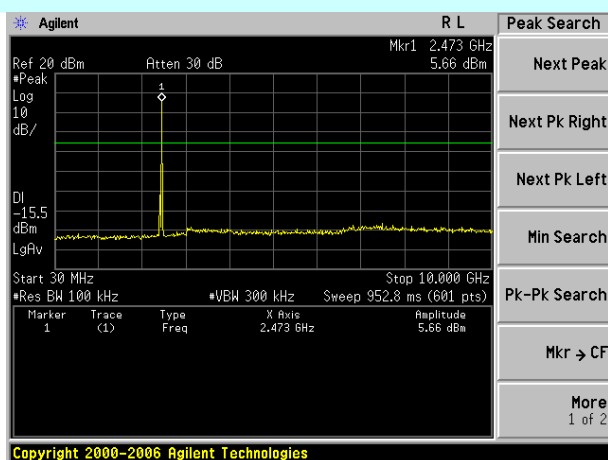

30MHz~10GHz

Highest channel

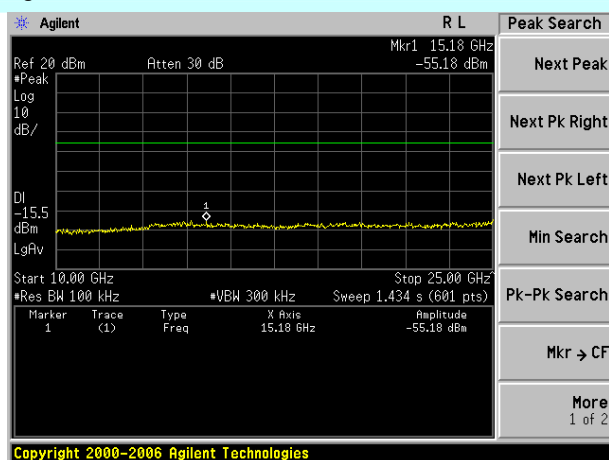

10GHz~25GHz

7.10.2 Radiated Emission Method

☞ Test method

FCC Part15 C Section 15.209 and 15.205

☞ Test method

ANSI C63.4:2003

☞ Receiver set

Frequency	Detector	RBW	VBW	Remark
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
Above 1GHz	Peak	1MHz	3MHz	Peak Value
	Peak	1MHz	10Hz	Average Value

☞ Limit


Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1GHz	54.00	Average Value
	74.00	Peak Value

☞ Test mode


Refer to section 5.3 for details

☞ Test setup

Below 1GHz

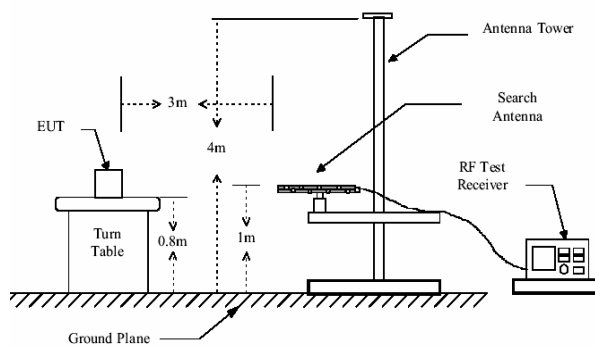

Above 1GHz

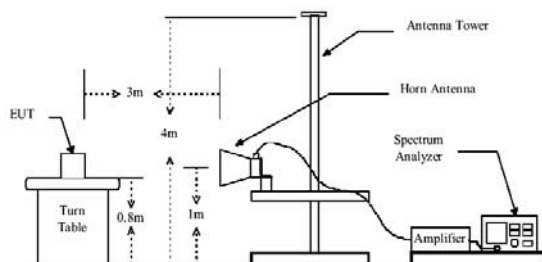

Test Procedure

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test Result

Complied

Remark:

During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case, so only show the test data of worse case modulation on the test report.

Measurement data:

Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
86.50	42.80	14.19	1.08	31.73	26.34	40.00	-13.66	Vertical
155.91	40.40	11.58	1.60	32.00	21.58	43.50	-21.92	Vertical
400.43	37.75	17.14	2.85	31.89	25.85	46.00	-20.15	Vertical
678.93	36.71	21.55	4.01	31.16	31.11	46.00	-14.89	Vertical
798.24	37.47	23.01	4.45	31.32	33.61	46.00	-12.39	Vertical
902.03	36.69	24.07	4.87	31.18	34.45	46.00	-11.55	Vertical
63.31	38.62	15.16	0.89	31.92	22.75	40.00	-17.25	Horizontal
273.23	38.12	15.50	2.24	32.17	23.69	46.00	-22.31	Horizontal
338.40	37.82	16.15	2.57	32.06	24.48	46.00	-21.52	Horizontal
558.73	36.59	19.72	3.56	31.25	28.62	46.00	-17.38	Horizontal
731.31	36.64	22.24	4.20	31.24	31.84	46.00	-14.16	Horizontal
925.76	37.66	23.99	4.95	31.20	35.40	46.00	-10.60	Horizontal

■ Above 1GHz

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	33.69	31.78	8.60	24.17	49.90	74.00	-24.10	Vertical
7206.00	31.89	36.15	11.65	26.39	53.30	74.00	-20.70	Vertical
9608.00	31.29	38.01	14.14	25.45	57.99	74.00	-16.01	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	31.97	31.78	8.60	24.17	48.18	74.00	-25.82	Horizontal
7206.00	30.17	36.15	11.65	26.39	51.58	74.00	-22.42	Horizontal
9608.00	30.16	38.01	14.14	25.45	56.86	74.00	-17.14	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	22.38	31.78	8.60	24.17	38.59	54.00	-15.41	Vertical
7206.00	20.21	36.15	11.65	26.39	41.62	54.00	-12.38	Vertical
9608.00	19.85	38.01	14.14	25.45	46.55	54.00	-7.45	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	20.76	31.78	8.60	24.17	36.97	54.00	-17.03	Horizontal
7206.00	19.38	36.15	11.65	26.39	40.79	54.00	-13.21	Horizontal
9608.00	17.84	38.01	14.14	25.45	44.54	54.00	-9.46	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Middle
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	33.20	31.85	8.66	24.10	49.61	74.00	-24.39	Vertical
7323.00	31.46	36.37	11.72	26.71	52.84	74.00	-21.16	Vertical
9764.00	30.82	38.35	14.25	25.36	58.06	74.00	-15.94	Vertical
12205.00	*					74.00		Vertical
14480.00	*					74.00		Vertical
4882.00	31.46	31.85	8.66	24.10	47.87	74.00	-26.13	Horizontal
7323.00	29.71	36.37	11.72	26.71	51.09	74.00	-22.91	Horizontal
9764.00	29.68	38.35	14.25	25.36	56.92	74.00	-17.08	Horizontal
12205.00	*					74.00		Horizontal
14480.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	21.92	31.85	8.66	24.10	38.33	54.00	-15.67	Vertical
7323.00	19.73	36.37	11.72	26.71	41.11	54.00	-12.89	Vertical
9764.00	19.34	38.35	14.25	25.36	46.58	54.00	-7.42	Vertical
12205.00	*					54.00		Vertical
14480.00	*					54.00		Vertical
4882.00	20.27	31.85	8.66	24.10	36.68	54.00	-17.32	Horizontal
7323.00	18.95	36.37	11.72	26.71	40.33	54.00	-13.67	Horizontal
9764.00	17.38	38.35	14.25	25.36	44.62	54.00	-9.38	Horizontal
12205.00	*					54.00		Horizontal
14480.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“*”, means this data is the too weak instrument of signal is unable to test.*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	32.96	31.93	8.73	24.03	49.59	74.00	-24.42	Vertical
7440.00	31.25	36.59	11.79	27.03	52.60	74.00	-21.40	Vertical
9920.00	30.58	38.81	14.38	25.26	58.51	74.00	-15.49	Vertical
12400.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4960.00	31.21	31.93	8.73	24.03	47.84	74.00	-26.17	Horizontal
7440.00	29.48	36.59	11.79	27.03	50.83	74.00	-23.18	Horizontal
9920.00	29.44	38.81	14.38	25.26	57.37	74.00	-16.64	Horizontal
12400.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	21.69	31.93	8.73	24.03	38.32	54.00	-15.68	Vertical
7440.00	19.49	36.59	11.79	27.03	40.84	54.00	-13.17	Vertical
9920.00	19.09	38.81	14.38	25.26	47.02	54.00	-6.98	Vertical
12400.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4960.00	20.03	31.93	8.73	24.03	36.66	54.00	-17.35	Horizontal
7440.00	18.74	36.59	11.79	27.03	40.09	54.00	-13.91	Horizontal
9920.00	17.16	38.81	14.38	25.26	45.09	54.00	-8.92	Horizontal
12400.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.