



SHENZHEN SETEK TECHNOLOGY CO., LTD.

# FCC Report

**Product Description: Smart Phone**

**Trade Mark: Skyworth**

**Model No.: A076, GP353, SPA376**

**FCC ID: Q7Q-A076**

Applicant: Shenzhen Skyworth Wireless Technology Co., Ltd.

Address: Unit A Rm 3A01, Skyworth Bldg, Gaoxin Ave 1S, Nanshan District, Shenzhen, China.

Applicable standards: FCC CFR Title 47 Part 15 Subpart B: 2012

Test Date: 15 May ~ 31 May, 2013

Issued Date: 31 May, 2013

Test Result: Complied

**James Wu**  
**Laboratory Manager**

The test result in this test report relate only to the tested samples in this report .

This report shall not be reproduced except in full without the written approval of Shenzhen SETEK Technology co., Ltd.

## 2 Version

<b>Version No.</b>	<b>Date</b>	<b>Description</b>
00	31 May, 2013	Original




*Prepared By:*

*Date:*

31 May, 2013

Young Li  
Project Engineer



*Check By:*

*Date:*

31 May, 2013

Dixon Hao  
Reviewer

### 3 Contents

	Page
<b>1 COVER PAGE</b>	<b>1</b>
<b>2 VERSION</b>	<b>2</b>
<b>3 CONTENTS</b>	<b>3</b>
<b>4 TEST SUMMARY</b>	<b>4</b>
<b>5 GENERAL INFORMATION</b>	<b>5</b>
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST MODE	5
5.4 DESCRIPTION OF SUPPORT UNITS	5
5.5 TEST FACILITY	6
5.6 TEST LOCATION	6
<b>6 TEST INSTRUMENTS LIST</b>	<b>7</b>
<b>7 MEASUREMENT DATA AND TEST RESULTS</b>	<b>8</b>
7.1 CONDUCTED EMISSIONS	8
7.2 RADIATED EMISSION	11

## 4 Test Summary

Test Item	Test Method	Result
Conducted Emission	15.107	Complied
Radiated Emission	15.109	Complied

*Complied: The EUT has complied with the essential requirements in the standard.*

## 5 General Information

### 5.1 Client Information

Applicant:	Shenzhen Skyworth Wireless Technology Co., Ltd.
Address:	Unit A Rm 3A01, Skyworth Bldg, Gaoxin Ave 1S, Nanshan District, Shenzhen, China.
Manufacturer:	Shenzhen Skyworth Wireless Technology Co., Ltd.
Address:	Unit A Rm 3A01, Skyworth Bldg, Gaoxin Ave 1S, Nanshan District, Shenzhen, China.
Factory:	Shenzhen Skyworth Wireless Technology Co., Ltd.
Address:	Unit A Rm 3A01, Skyworth Bldg, Gaoxin Ave 1S, Nanshan District, Shenzhen, China.

### 5.2 General Description of EUT

Product Name:	Smart Phone
Brand Mark:	Skyworth
Model No.:	A076, GP353, SPA376
Test model No.:	A076
Software Version:	4.0.4
Hardware Version:	A076_MAIN_PCB_V1.0
AC Adapter:	Model: SW-0018 Input: AC 100~240V 50/60Hz 0.5A Output: DC 5.0V 1.0A
Power supply:	lithium-ion charge battery 3.7V

### 5.3 Test Mode

PC mode	Keep the EUT in exchange data with PC.
---------	--

### 5.4 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
HP	Printer	CB495A	05257893	DoC
Lenovo	PC Host	M6900	EA05257893	DoC
DELL	MONITOR	E178FPC	N/A	DoC
DELL	KEYBOARD	SK-8115	N/A	DoC
DELL	MOUSE	MOC5UO	N/A	DoC

## 5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

■ **CNAS —Registration No.: CNAS L5775**

CNAS has accredited Global United Technology Services Co., Ltd. to ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

■ **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010.

■ **Industry Canada (IC) —Registration No.: 9079A-1**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.

## 5.6 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

## 6 Test Instruments list

Instrument	Manufacturer	Model No.	Inventory No.	Next Cal. Date
3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 28 2014
Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A
EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 02 2013
BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Feb. 23 2014
Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2013
Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 28 2014
EMI Test Software	AUDIX	E3	N/A	N/A
Coaxial Cable	GTS	N/A	GTS213	Mar. 29 2014
Coaxial Cable	GTS	N/A	GTS211	Mar. 29 2014
Coaxial cable	GTS	N/A	GTS210	Mar. 29 2014
Coaxial Cable	GTS	N/A	GTS212	Mar. 29 2014
Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jul. 02 2013
Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jul. 02 2013
Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2013
Band filter	Amindeon	82346	GTS219	Mar. 29 2014
Universal radio communication tester	Rohde & Schwarz	CMU200	GTS235	May 10 2014
Signal Generator	Rohde & Schwarz	SML03	GTS236	May 10 2014
Temp. Humidity/ Barometer	Oregon Scientific	BA-888	GTS248	May 10 2014
D.C. Power Supply	Insteck	PS-3030	GTS232	NA
Splitter	Agilent	11636B	GTS237	May 10 2014

Conducted Emission				
Instrument	Manufacturer	Model No.	Inventory No.	Next Cal. Date
Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Sep. 07 2013
EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	Jul. 02 2013
10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	Jul. 02 2013
Coaxial Switch	ANRITSU CORP	MP59B	GTS225	Jul. 02 2013
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	Jul. 02 2013
Coaxial Cable	GTS	N/A	GTS227	Jul. 02 2013
EMI Test Software	AUDIX	E3	N/A	N/A
Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Sep. 07 2013
EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	Jul. 02 2013

## 7 Measurement Data and Test Results

### 7.1 Conducted Emissions

#### ☞ Standard requirement

FCC Part15 C Section 15.107

#### ☞ Test method

ANSI C63.4:2003

#### ☞ Receiver set

RBW=9KHz, VBW=30KHz, Sweep time=auto


#### ☞ Limit

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

#### ☞ Test mode

Refer to section 5.3 for details

#### ☞ Test setup

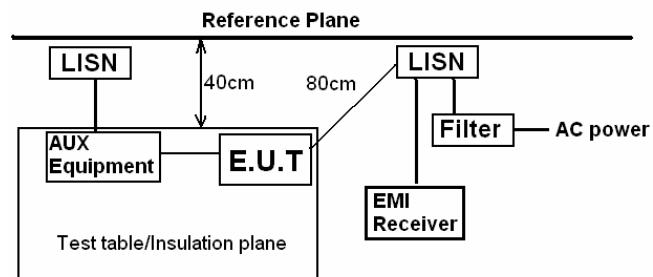

Remark:

E.U.T: Equipment Under Test

LISN: Line Impedance Stabilization Network

Test table height=0.8m


#### ☞ Test mode

1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.
2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).
3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.

#### ☞ Test Result


Complied

Test mode:	PC mode	Temperature:	24~26°C
Phase Polarity:	Line	Relative Humidity:	50~53%

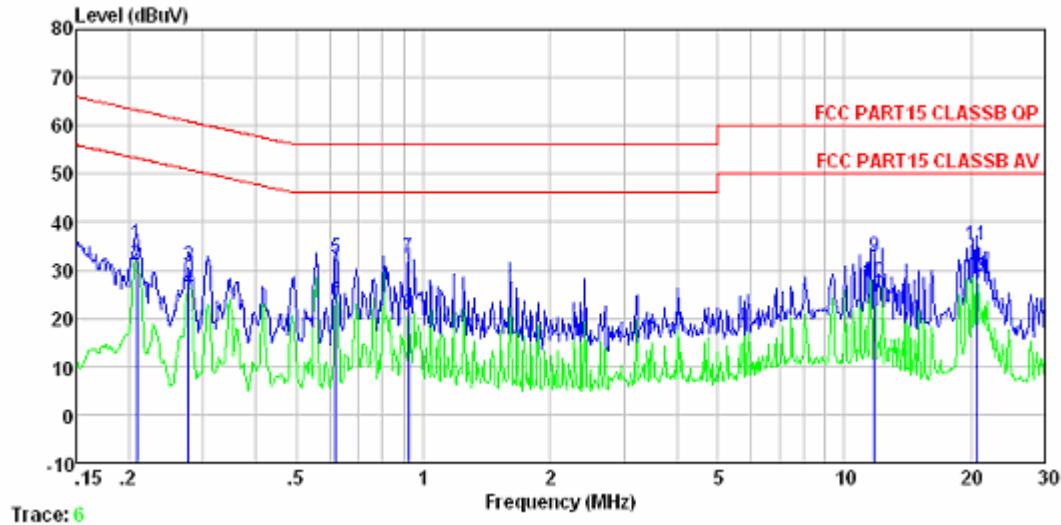

Freq	Read	LISN	Cable	Limit	Over	Remark
	Level	Factor	Loss			
	MHz	dB <sub>uV</sub>	dB	dB <sub>uV</sub>	dB <sub>uV</sub>	dB
1	0.208	35.56	-0.23	0.10	35.43	63.27 -27.84 QP
2	0.208	31.28	-0.23	0.10	31.15	53.27 -22.12 Average
3	0.277	30.85	-0.22	0.10	30.73	60.90 -30.17 QP
4	0.277	25.96	-0.22	0.10	25.84	50.90 -25.06 Average
5	0.621	32.54	-0.20	0.10	32.44	56.00 -23.56 QP
6	0.621	23.61	-0.20	0.10	23.51	46.00 -22.49 Average
7	0.923	32.70	-0.21	0.10	32.59	56.00 -23.41 QP
8	0.923	21.15	-0.21	0.10	21.04	46.00 -24.96 Average
9	11.807	33.00	-0.44	0.20	32.76	60.00 -27.24 QP
10	11.807	27.67	-0.44	0.20	27.43	50.00 -22.57 Average
11	20.594	35.61	-0.64	0.21	35.18	60.00 -24.82 QP
12	20.594	29.12	-0.64	0.21	28.69	50.00 -21.31 Average

Test mode:	PC mode	Temperature:	24~26°C
Phase Polarity:	Nertral	Relative Humidity:	50~53%

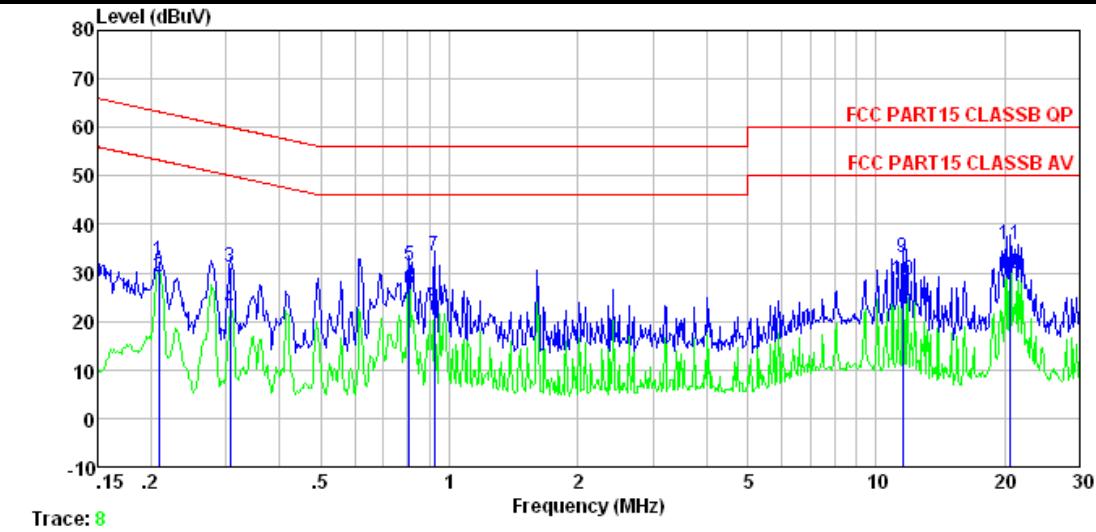

Freq	Read	LISN	Cable	Level	Limit	Over	Remark
	MHz	Level	Factor		Line	Limit	
				dBuV	dBuV	dB	
1	0.208	32.55	-0.09	0.10	32.56	63.27	-30.71 QP
2	0.208	29.14	-0.09	0.10	29.15	53.27	-24.12 Average
3	0.307	31.14	-0.09	0.10	31.15	60.06	-28.91 QP
4	0.307	22.50	-0.09	0.10	22.51	50.06	-27.55 Average
5	0.804	31.64	-0.08	0.10	31.66	56.00	-24.34 QP
6	0.804	26.54	-0.08	0.10	26.56	46.00	-19.44 Average
7	0.923	33.48	-0.09	0.10	33.49	56.00	-22.51 QP
8	0.923	22.92	-0.09	0.10	22.93	46.00	-23.07 Average
9	11.559	33.15	-0.31	0.20	33.04	60.00	-26.96 QP
10	11.559	28.65	-0.31	0.20	28.54	50.00	-21.46 Average
11	20.594	36.27	-0.54	0.21	35.94	60.00	-24.06 QP
12	20.594	30.26	-0.54	0.21	29.93	50.00	-20.07 Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss

## 7.2 Radiated Emission

### ☞ Test method

FCC Part15 C Section 15.109

### ☞ Test method

ANSI C63.4:2003

### ☞ Receiver set

Frequency	Detector	RBW	VBW	Remark
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
Above 1GHz	Peak	1MHz	3MHz	Peak Value
	Peak	1MHz	3MHz	Average Value

### ☞ Limit


Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1GHz	54.00	Average Value
	74.00	Peak Value

### ☞ Test mode


Refer to section 5.3 for details

### ☞ Test setup

Below 1GHz

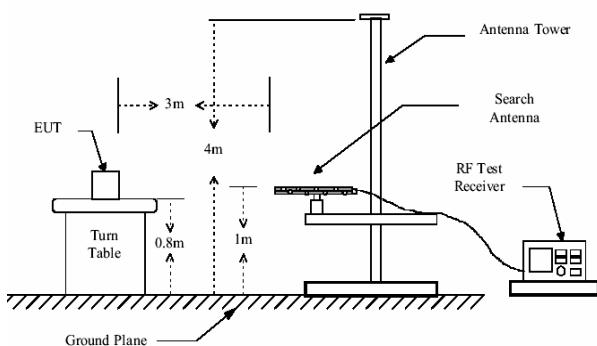

Above 1GHz

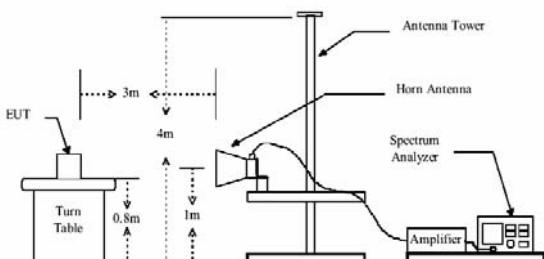


**☞ Test Procedure**


1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**☞ Test Result****Complied****Measurement data:**

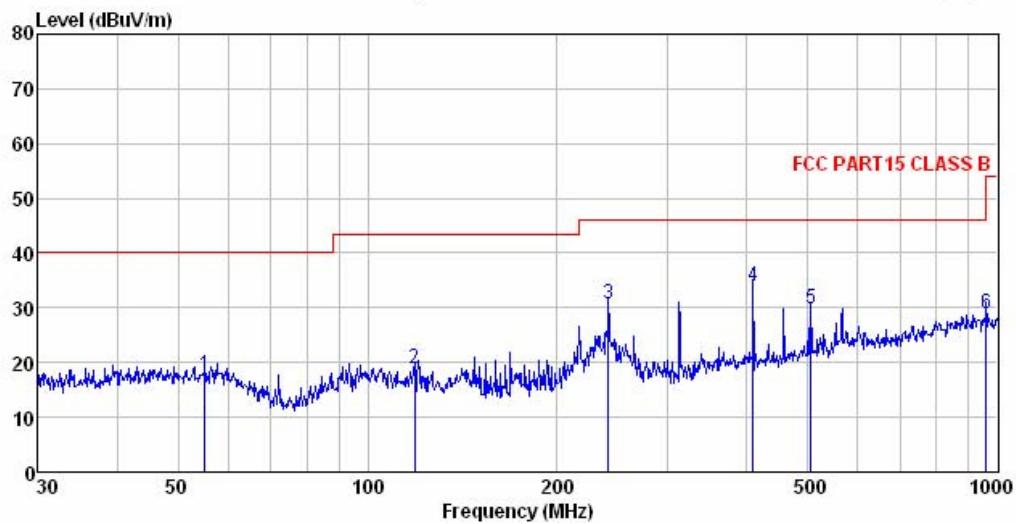**Horizontal:**


Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	55.22	36.34	13.03	0.34	31.99	17.72	40.00	-22.28 QP
2	118.60	39.59	10.69	0.53	31.81	19.00	43.50	-24.50 QP
3	240.83	50.13	12.09	0.88	32.28	30.82	46.00	-15.18 QP
4	408.95	49.77	15.27	1.27	32.26	34.05	46.00	-11.95 QP
5	504.71	43.36	16.68	1.48	31.59	29.93	46.00	-16.07 QP
6	958.79	36.66	21.49	2.23	31.50	28.88	46.00	-17.12 QP

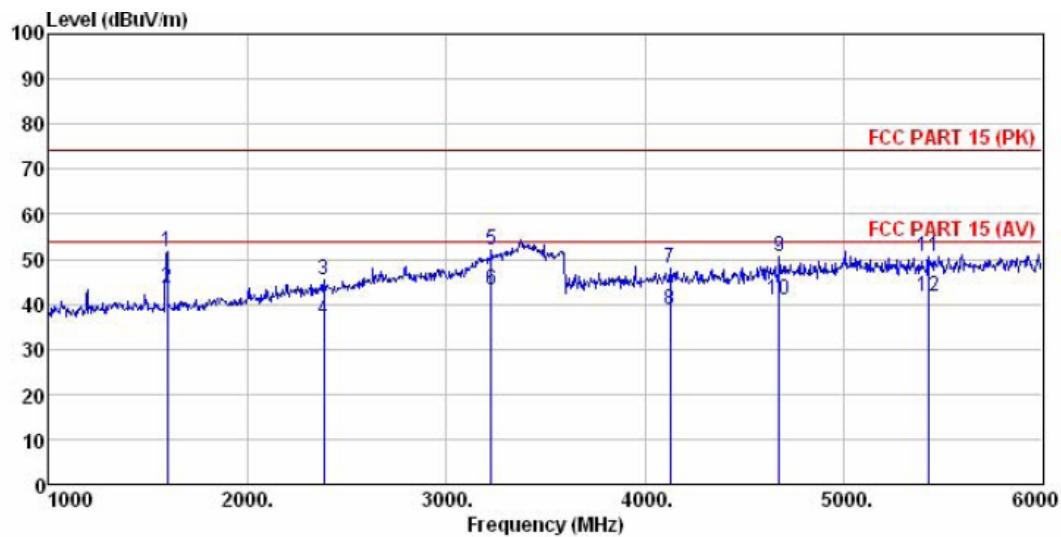

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	1595.00	58.16	24.98	3.11	34.64	51.61	74.00 -22.39 Peak
2	1595.00	50.27	24.98	3.11	34.64	43.72	54.00 -10.28 Average
3	2385.00	48.70	27.58	3.81	34.83	45.26	74.00 -28.74 Peak
4	2385.00	39.97	27.58	3.81	34.83	36.53	54.00 -17.47 Average
5	3225.00	53.72	28.62	4.60	35.08	51.86	74.00 -22.14 Peak
6	3225.00	44.88	28.62	4.60	35.08	43.02	54.00 -10.98 Average
7	4125.00	47.74	30.09	5.38	35.33	47.88	74.00 -26.12 Peak
8	4125.00	38.73	30.09	5.38	35.33	38.87	54.00 -15.13 Average
9	4675.00	48.80	31.24	5.79	35.44	50.39	74.00 -23.61 Peak
10	4675.00	39.27	31.24	5.79	35.44	40.86	54.00 -13.14 Average
11	5425.00	48.00	31.91	6.25	35.42	50.74	74.00 -23.26 Peak
12	5425.00	38.97	31.91	6.25	35.42	41.71	54.00 -12.29 Average

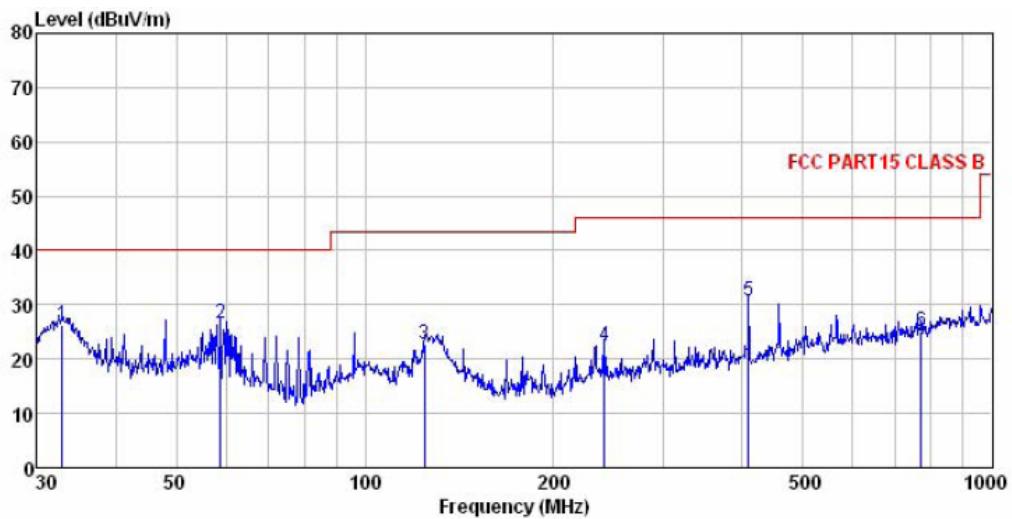**Vertical:**

Freq	Read	Antenna	Cable	Preamp	Limit	Over	Limit	Remark
	Level	Factor	Loss	Factor				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	32.86	45.96	12.31	0.22	32.23	26.26	40.00	-13.74 QP
2	58.82	45.45	12.77	0.35	31.95	26.62	40.00	-13.38 QP
3	124.57	44.10	9.80	0.55	31.83	22.62	43.50	-20.88 QP
4	240.83	41.89	12.09	0.88	32.28	22.58	46.00	-23.42 QP
5	408.95	46.38	15.27	1.27	32.26	30.66	46.00	-15.34 QP
6	771.45	34.83	19.72	2.01	31.55	25.01	46.00	-20.99 QP

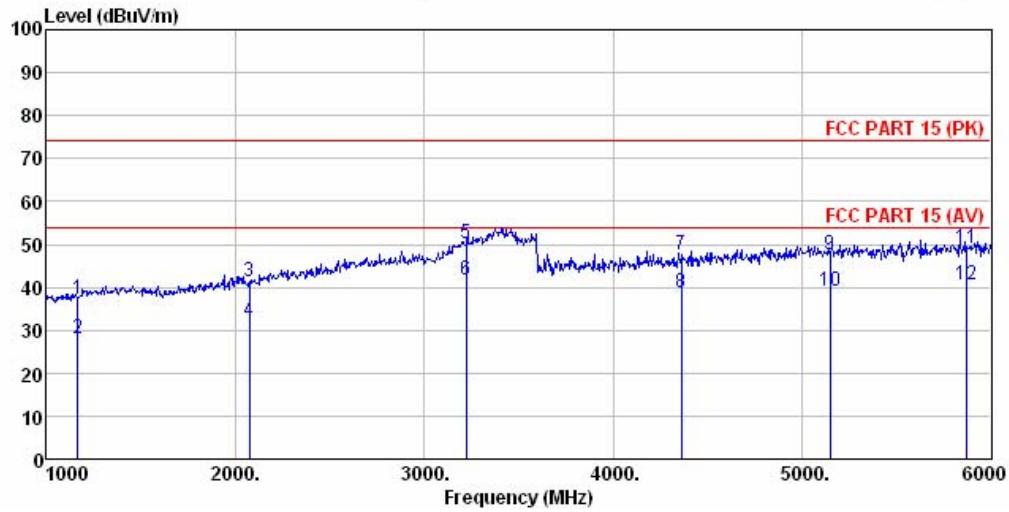

Freq	Read	Antenna	Cable	Preamp	Limit	Over	Limit	Remark
	Level	Factor	Loss	Factor				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1165.00	44.49	24.75	2.56	34.54	37.26	74.00	-36.74 Peak
2	1165.00	35.18	24.75	2.56	34.54	27.95	54.00	-26.05 Average
3	2075.00	45.64	26.71	3.56	34.73	41.18	74.00	-32.82 Peak
4	2075.00	36.59	26.71	3.56	34.73	32.13	54.00	-21.87 Average
5	3220.00	52.02	28.62	4.60	35.08	50.16	74.00	-23.84 Peak
6	3220.00	43.67	28.62	4.60	35.08	41.81	54.00	-12.19 Average
7	4360.00	46.99	30.50	5.58	35.38	47.69	74.00	-26.31 Peak
8	4360.00	37.89	30.50	5.58	35.38	38.59	54.00	-15.41 Average
9	5150.00	45.01	32.07	6.08	35.47	47.69	74.00	-26.31 Peak
10	5150.00	36.49	32.07	6.08	35.47	39.17	54.00	-14.83 Average
11	5870.00	45.43	32.73	6.47	35.62	49.01	74.00	-24.99 Peak
12	5870.00	36.94	32.73	6.47	35.62	40.52	54.00	-13.48 Average