

RF Test Report

Applicant : Mobile Action Technology Inc.

Product Type : Bluetooth 4.0 Low Energy Wristband

Trade Name : Q-Watch

Model Number : Q-82

Test Specification : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2009

Receive Date : Jan. 03, 2019

Test Period : Jan. 08 ~ Jan. 11, 2019

Issue Date : Jan. 18, 2019

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Test Firm MRA designation number: TW0010

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Revised By
00	Jan. 18, 2019	Initial Issue	Nina Lin

Verification of Compliance

Issued Date: Jan. 18, 2019

Applicant : Mobile Action Technology Inc.
Product Type : Bluetooth 4.0 Low Energy Wristband
Trade Name : Q-Watch
Model Number : Q-82
FCC ID : Q7Z-19H82R1
EUT Rated Voltage : DC 5 V, 0.1 A
Test Voltage : 120 Vac, 60 Hz, DC 3.7 V
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2009
Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : Fly Lu Reviewed By : Eric Ou Yang
(Manager) (Fly Lu) (Testing Engineer) (Eric Ou Yang)

TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result.....	5
1.2.	Measurement Uncertainty	5
2	EUT Description.....	6
3	Test Methodology.....	7
3.1.	Mode of Operation	7
3.2.	EUT Test Step	7
3.3.	Configuration of Test System Details	8
3.4.	Test Instruments	9
3.5.	Test Site Environment.....	9
4	Measurement Procedure.....	10
4.1.	AC Power Line Conducted Emission Measurement	10
4.2.	Radiated Emission Measurement	12
4.3.	Band Edges Measurement	16
4.4.	20 dB Bandwidth and 99 % Occupied Bandwidth Measurement	17
4.5.	Antenna Measurement	18
5	Test Results	19
	Annex A. Conducted Emission	19
	Annex B. Conducted Test Results	21
	Annex C. Radiated Emission Measurement	23

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
FCC			
15.207	AC Power Conducted Emission	PASS	-----
15.249(a)	Transmitter Radiated Emissions	PASS	-----
15.249(d)	Band Edge Measurement	PASS	-----
15.215(c)	20 dB RF Bandwidth	PASS	-----
15.203	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9 kHz ~ 150 kHz	2.7
	150 kHz ~ 30 MHz	2.7
Radiated Emission	9 kHz ~ 30 MHz	1.7
	30 MHz ~ 1000 MHz	5.7
	1000 MHz ~ 18000 MHz	5.5
	18000 MHz ~ 26500 MHz	4.8
	26500 MHz ~ 40000 MHz	4.8
RF Bandwidth	4.96 %	

2 EUT Description

Applicant	Mobile Action Technology Inc. 5F., No.205-3, Sec.3, Beishin Rd., Shindian City Taipei Taiwan 231
Manufacturer	Heisei Technology Co., Ltd. 2F.,No.5,Aly.8,Ln.45.,Baoxing Rd.,Xindian Dist.,New Taipei City 231,Taiwan,R.O.C.
Product Type	Bluetooth 4.0 Low Energy Wristband
Trade Name	Q-Watch
Model Number	Q-82
FCC ID	Q7Z-19H82R1
Frequency Range	2402 ~ 2480 MHz
Modulation Type	GFSK
Number of Channel	40 CH
Antenna Type	FPC Antenna
Antenna Gain	-6.53 dBi
Field Strength	83.23 dBuV/m
Operate Temp. Range	10 ~ +65 °C

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit Mode
Mode 2: Continuous TX mode

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that “X axis” position was the worst, then the final test was executed the worst condition and test data were recorded in this report.


3.2. EUT Test Step

1	Setup the EUT shown on “Configuration of Test System Details”.
2	Turn on the power of EUT.


Measurement Software			
No.	Description	Software	Version
1	Conducted Emission	EZ EMC	1.1.4.3
2	Radiated Emission	EZ EMC	1.1.4.4

3.3. Configuration of Test System Details

Conducted Emission

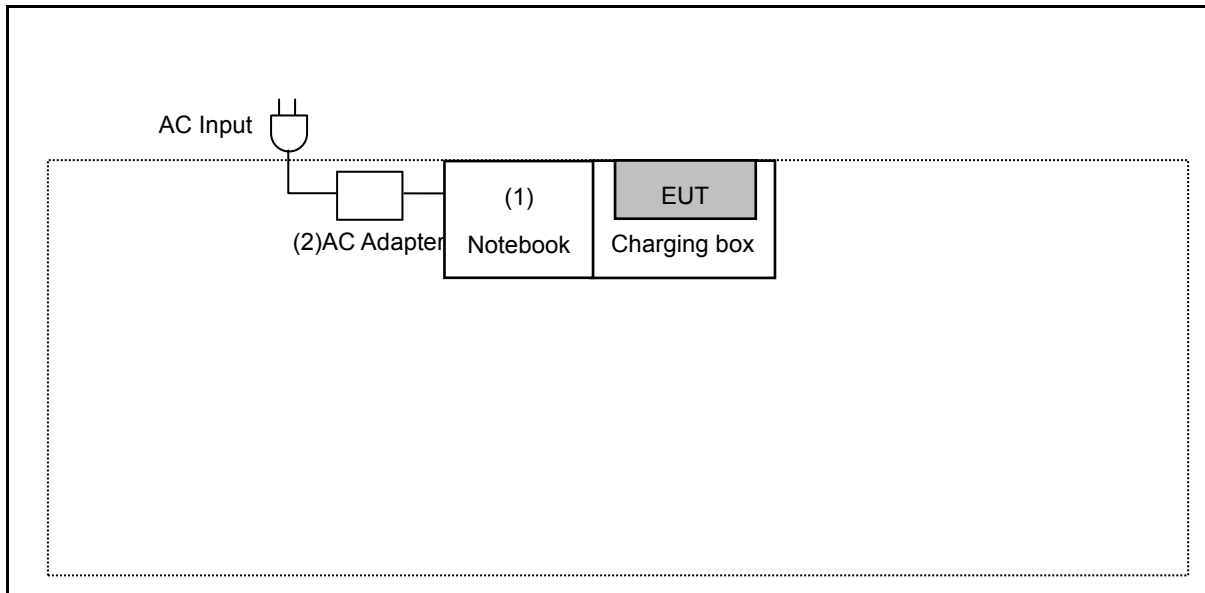

Radiated Emission

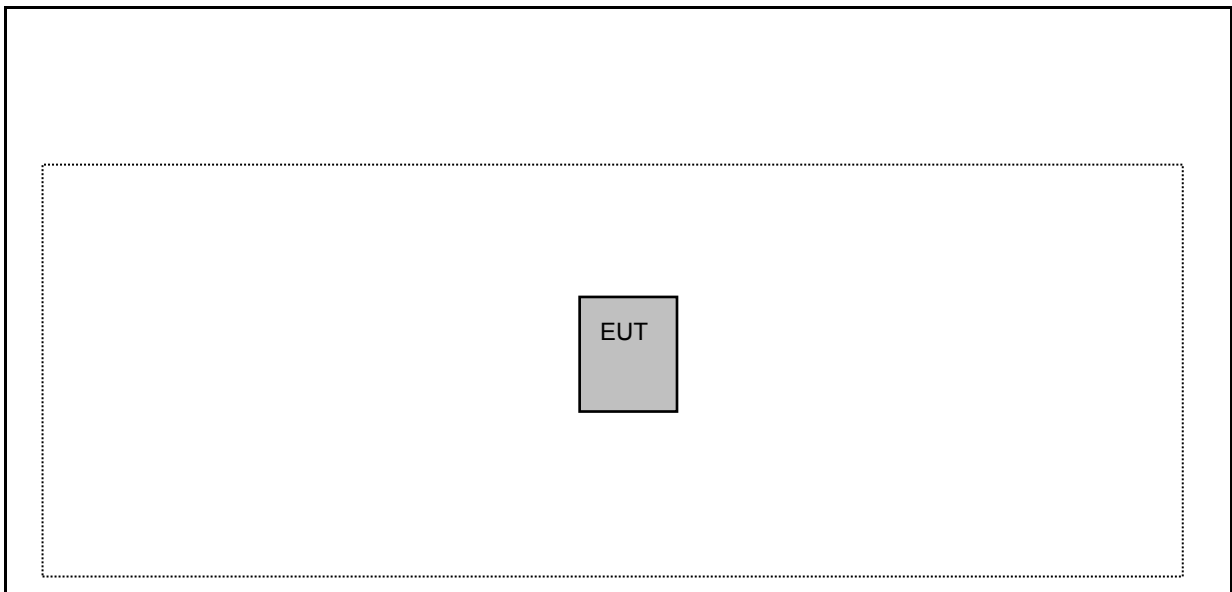

Devices Description					
	Product	Manufacturer	Model Number	Serial Number	Power Cord
(1)	Notebook	DELL	LATITUDE E6440	5HZBD72	---
(2)	AC Adapter	DELL	HA65NM130	---	Non-Shielded, 1.7 m



3.4. Test Instruments

For Conducted Emission

Test Period: Jan. 12, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESCI	100367	05/21/2018	1 year
LISN	R&S	ENV216	101040	04/11/2018	1 year
LISN	R&S	ENV216	101041	03/23/2018	1 year
RF Cable	Woken	00100D1380194M	TE-02-03	05/17/2018	1 year

For Radiated Emissions

Test Period: Jan. 08, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer	Agilent	N9020A	US47520902	09/25/2018	1 year
Amplifier	Agilent	8449B	3008A02237	10/16/2018	1 year
Amplifier	Agilent	8447D	2944A10961	06/27/2018	1 year
Trilog Broadband Antenna	Schwarzbeck Mess-Elektronik	VULB9168	416	10/23/2018	1 year
Broadband Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	08/23/2018	1 year
Broadband Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	9170	9170-320	08/07/2018	1 year
RF Cable	EMCI	EMC104-N-N-6000	TE01-1	02/20/2018	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1 3000	170814	10/30/2018	1 year
Microwave Cable	EMCI	EMC102-KM-KM-1 4000	151001	02/20/2018	1 year

For Conducted

Test Period: Jan. 11, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	09/25/2018	1 year

3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950


4 Measurement Procedure

4.1. AC Power Line Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

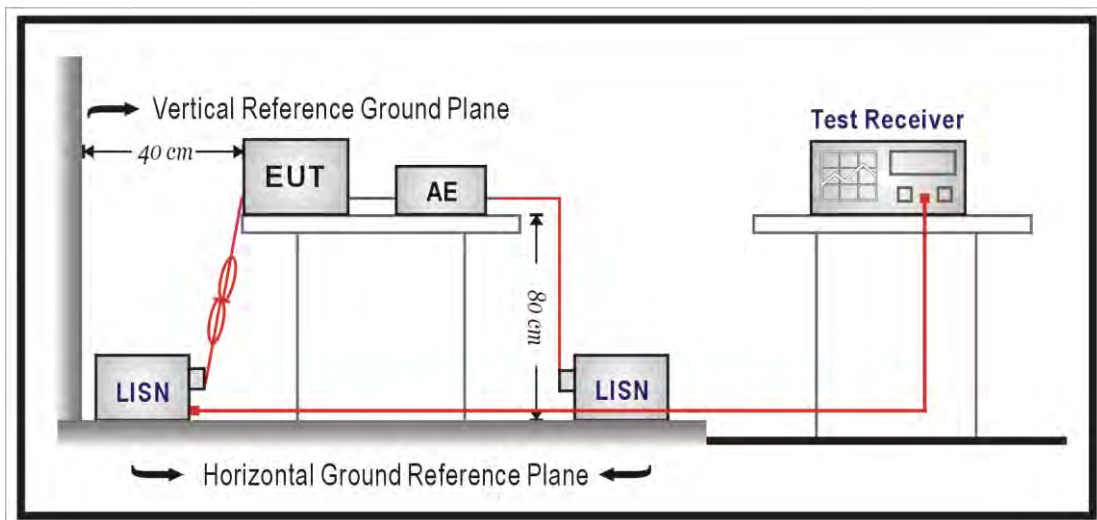

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All $50\ \Omega$ ports of the LISN shall be resistively terminated into $50\ \Omega$ loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.2. Radiated Emission Measurement

■ Limit

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at meter)	Measurement Distance (meter)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Harmonic emissions limits comply with below 54 dB $\mu\text{V/m}$ at 3 m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Note: (1) The tighter limit applies at the band edges.
 (2) Emission level (dB $\mu\text{V/m}$)=20 log Emission level ($\mu\text{V/m}$).

Limits of Radiated Emission Measurement (FCC 15.209)

Frequency (MHz)	Class A (dB $\mu\text{V/m}$) (at 3 m)		Class B (dB $\mu\text{V/m}$) (at 3 m)	
	Peak	AVG	Peak	AVG
0.009 – 0.490	80	60	74	54


Notes: (1) The limit for radiated test was performed according to FCC PART 15C.
 (2) The tighter limit applies at the band edges.
 (3) Emission level (dB $\mu\text{V/m}$)=20 log Emission level ($\mu\text{V/m}$).

Limits of Radiated Emission Measurement (FCC Part 15.249)


Frequency Range (MHz)	Limit
2400-2483.5	Field strength of fundamental 50000 $\mu\text{V/m}$ (94 dB $\mu\text{V/m}$) @ 3 m
Above 2483.5	Field strength of harmonics 500 $\mu\text{V/m}$ (54 dB $\mu\text{V/m}$) @ 3 m

■ Setup

Below 1 GHz

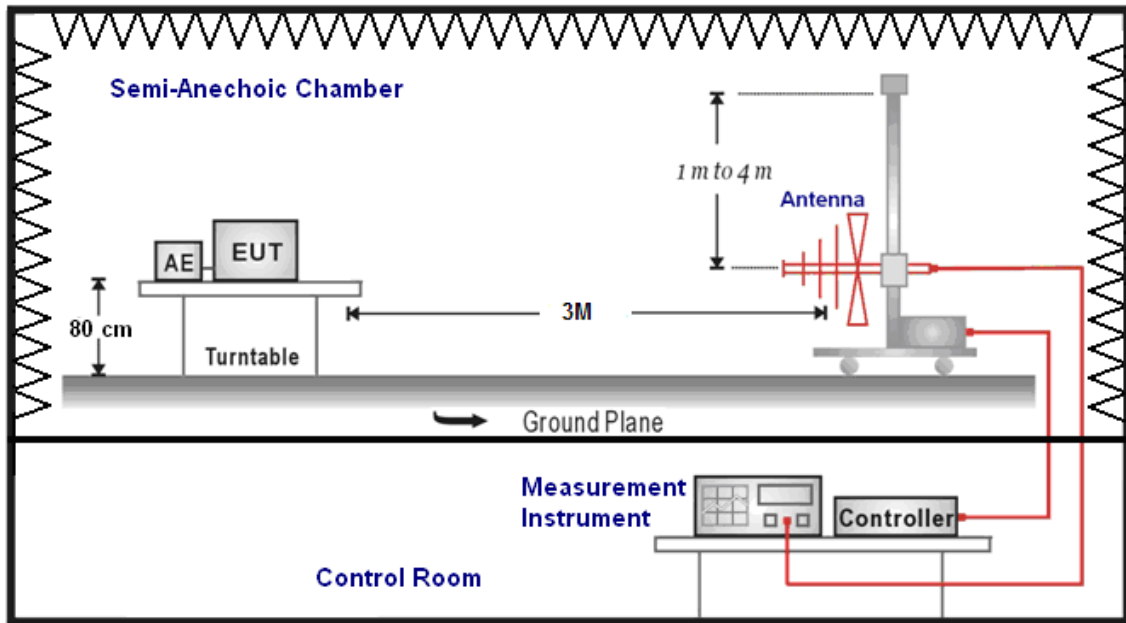

Above 1 GHz

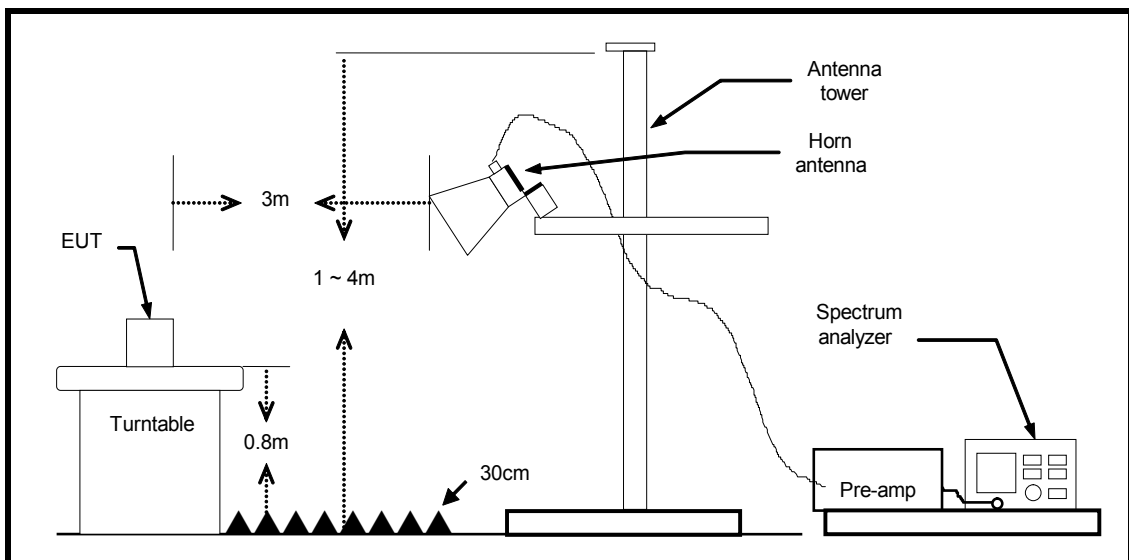

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 30 MHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (model VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).



The actual field intensity referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) + AF (dBuV) + CL (dBuV) - Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV) - Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm


(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

4.3. Band Edges Measurement

■ Limit

In any 100 kHz bandwidth outside the frequency band, the radio frequency power is at least 50 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

■ Test Setup

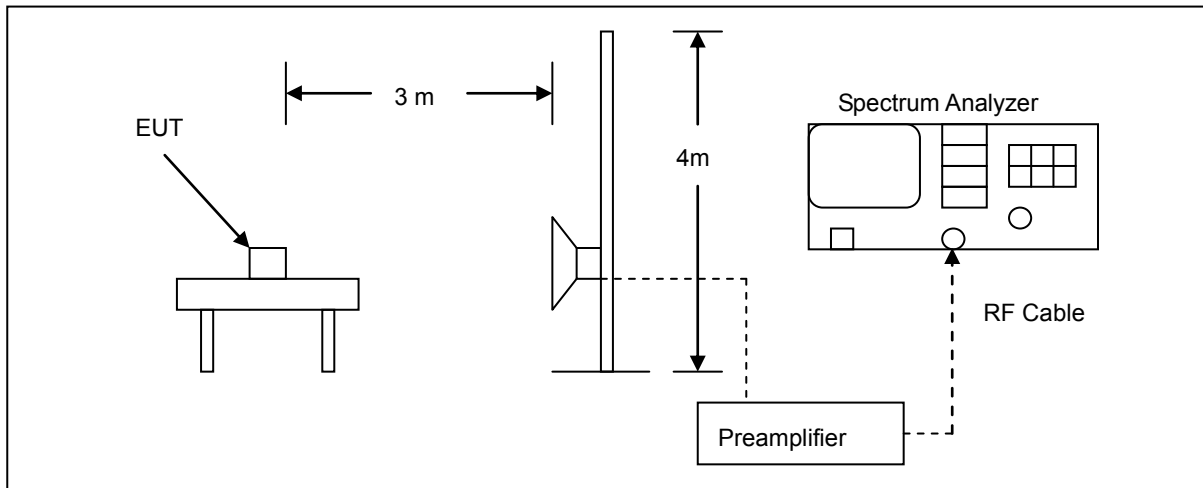

■ Test Procedure

The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.

The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.


For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

4.4. 20 dB Bandwidth and 99 % Occupied Bandwidth Measurement

■ Limit

N/A

■ Test Setup

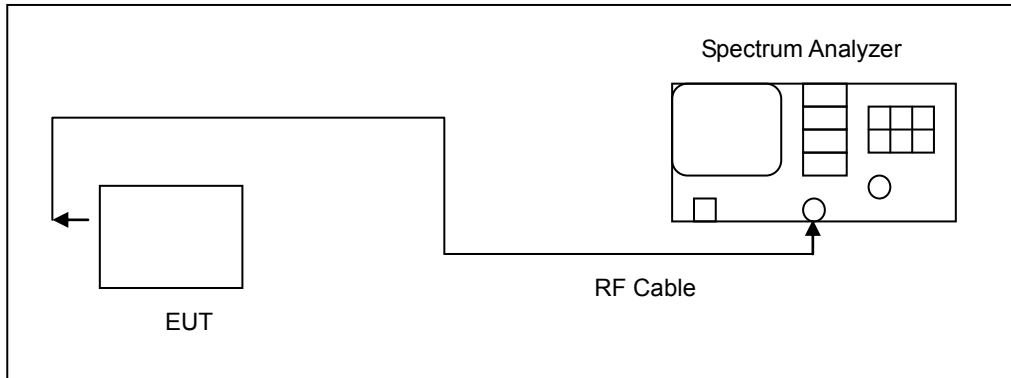

■ Test Procedure

The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth shall be set to as close to 1 % of the selected span as is possible without being below 1 %.

The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached and that frequency is recorded. The process is repeated for the highest frequency data points. This frequency is recorded.



4.5. Antenna Measurement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


■ Antenna Connector Construction

See section 2 – antenna information.

5 Test Results

Annex A. Conducted Emission

Standard:	FCC Part 15.249	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:			

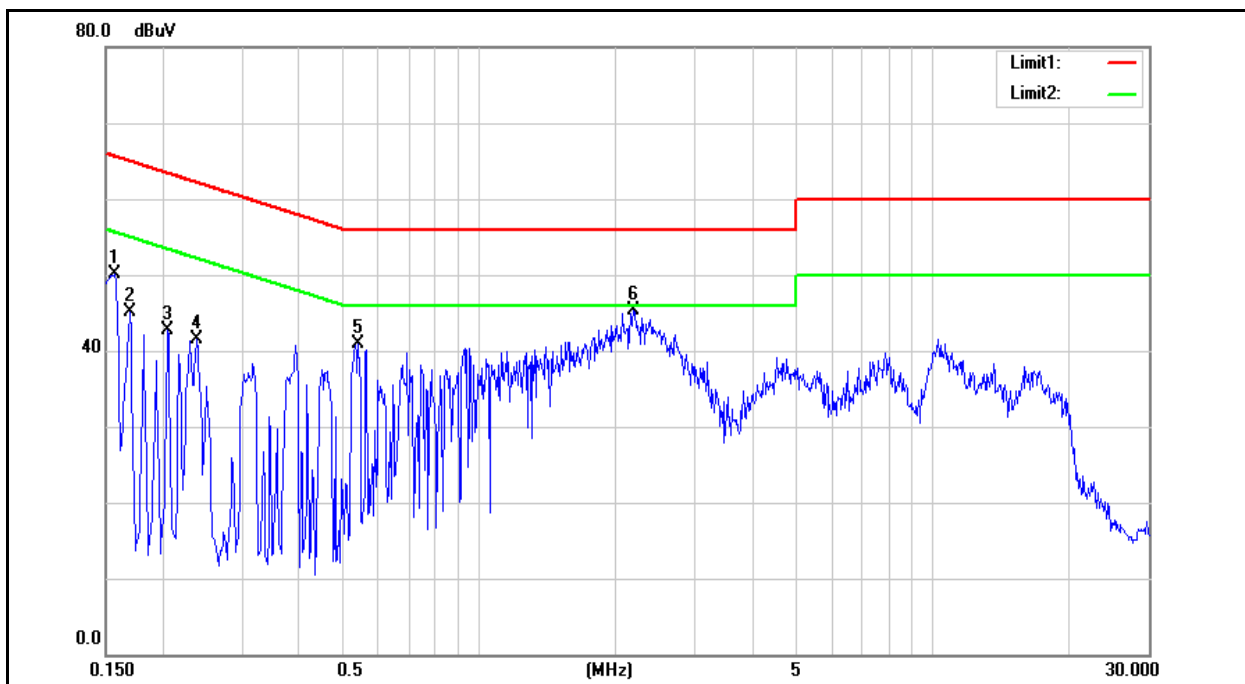


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	38.01	25.35	9.60	47.61	34.95	65.57	55.57	-17.96	-20.62	Pass
2	0.1700	28.84	4.99	9.60	38.44	14.59	64.96	54.96	-26.52	-40.37	Pass
3	0.2060	25.54	1.38	9.60	35.14	10.98	63.37	53.37	-28.23	-42.39	Pass
4	0.2380	27.68	15.49	9.60	37.28	25.09	62.17	52.17	-24.89	-27.08	Pass
5	0.5420	28.66	19.82	9.60	38.26	29.42	56.00	46.00	-17.74	-16.58	Pass
6	2.1900	30.37	22.82	9.67	40.04	32.49	56.00	46.00	-15.96	-13.51	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.249	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:			

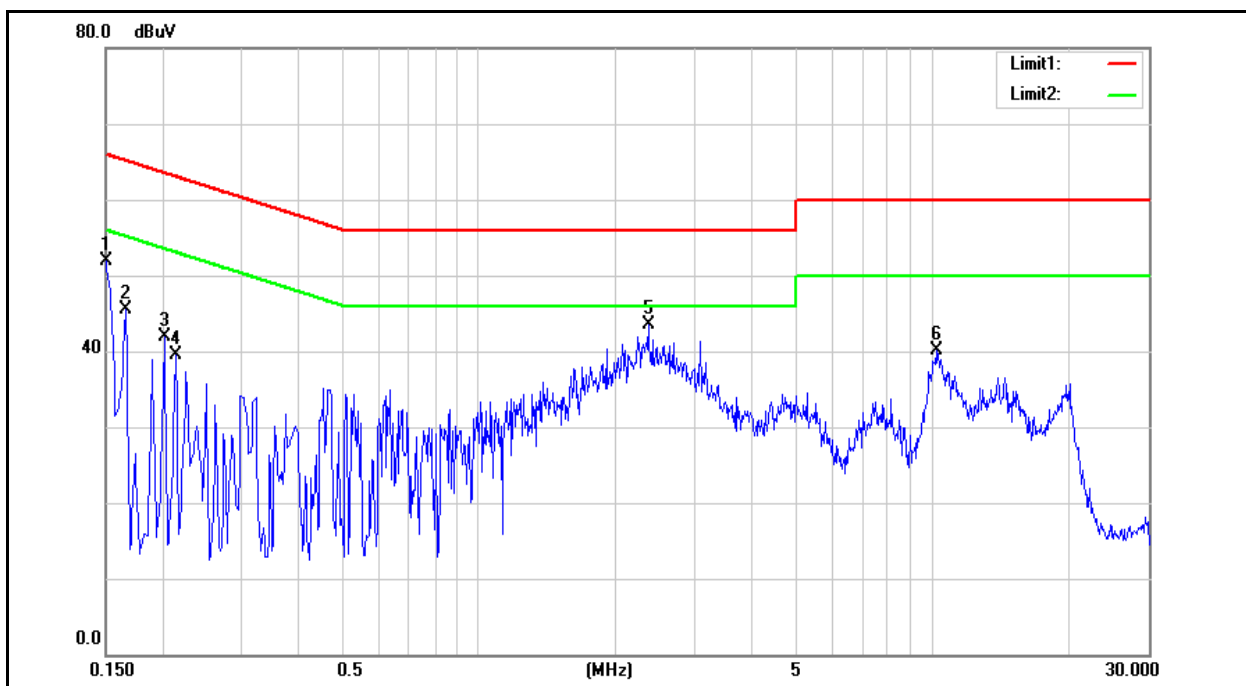

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	41.00	28.39	9.70	50.70	38.09	66.00	56.00	-15.30	-17.91	Pass
2	0.1660	28.75	5.02	9.71	38.46	14.73	65.16	55.16	-26.70	-40.43	Pass
3	0.2020	22.80	0.99	9.70	32.50	10.69	63.53	53.53	-31.03	-42.84	Pass
4	0.2140	24.52	8.24	9.70	34.22	17.94	63.05	53.05	-28.83	-35.11	Pass
5	2.3700	27.12	20.27	9.78	36.90	30.05	56.00	46.00	-19.10	-15.95	Pass
6	10.1900	24.10	18.17	9.99	34.09	28.16	60.00	50.00	-25.91	-21.84	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).



Annex B. Conducted Test Results

20 dB Bandwidth Measurement

Test Mode	Mode 2	
Frequency (MHz)	20 dB RF Bandwidth (kHz)	Limit (MHz)
2402	959.5	-----
2440	1027.0	-----
2480	952.9	-----


Test Graphs

Mode 2	
2402 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref Offset 0.8 dB Ref 20.00 dBm Center 2.402 GHz #Res BW 10 kHz #VBW 30 kHz Span 2 MHz Sweep 19.13 ms Occupied Bandwidth 912.05 kHz Total Power 9.42 dBm Transmit Freq Error 3.804 kHz OBW Power 99.00 % x dB Bandwidth 959.5 kHz x dB -20.00 dB File <BBB.png> saved
2440 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.440000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref Offset 0.8 dB Ref 20.00 dBm Center 2.44 GHz #Res BW 10 kHz #VBW 30 kHz Span 2 MHz Sweep 19.13 ms Occupied Bandwidth 902.20 kHz Total Power 9.38 dBm Transmit Freq Error 1.399 kHz OBW Power 99.00 % x dB Bandwidth 1.027 MHz x dB -20.00 dB File <BBB.png> saved
2480 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref Offset 0.8 dB Ref 20.00 dBm Center 2.48 GHz #Res BW 10 kHz #VBW 30 kHz Span 2 MHz Sweep 19.13 ms Occupied Bandwidth 905.52 kHz Total Power 9.44 dBm Transmit Freq Error 7.583 kHz OBW Power 99.00 % x dB Bandwidth 952.9 kHz x dB -20.00 dB File <BBB.png> saved

Annex C. Radiated Emission Measurement

Fundamental

Standard:	FCC Part 15.249	Test Distance:	3 m
Test item:	Fundamental	Power:	DC 3.7 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

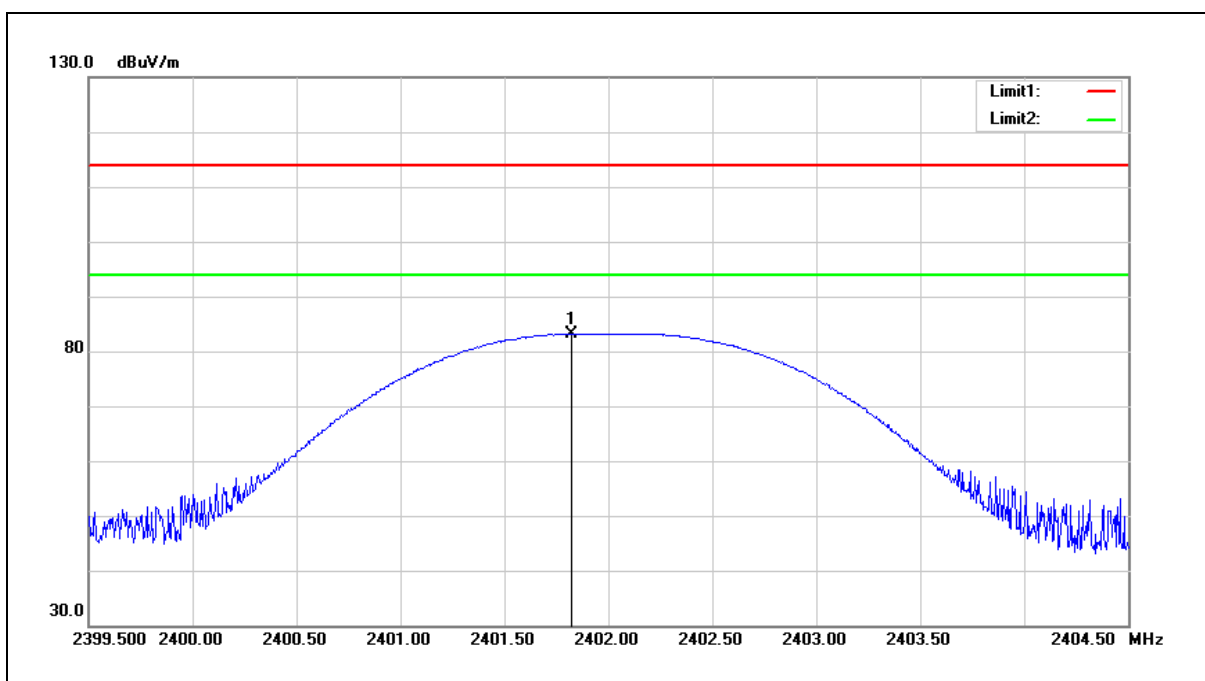

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2401.820	84.36	-1.13	83.23	114.00	-30.77	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).


Example: $83.23 = -1.13 + 84.36$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.249	Test Distance:	3 m
Test item:	Fundamental	Power:	DC 3.7 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

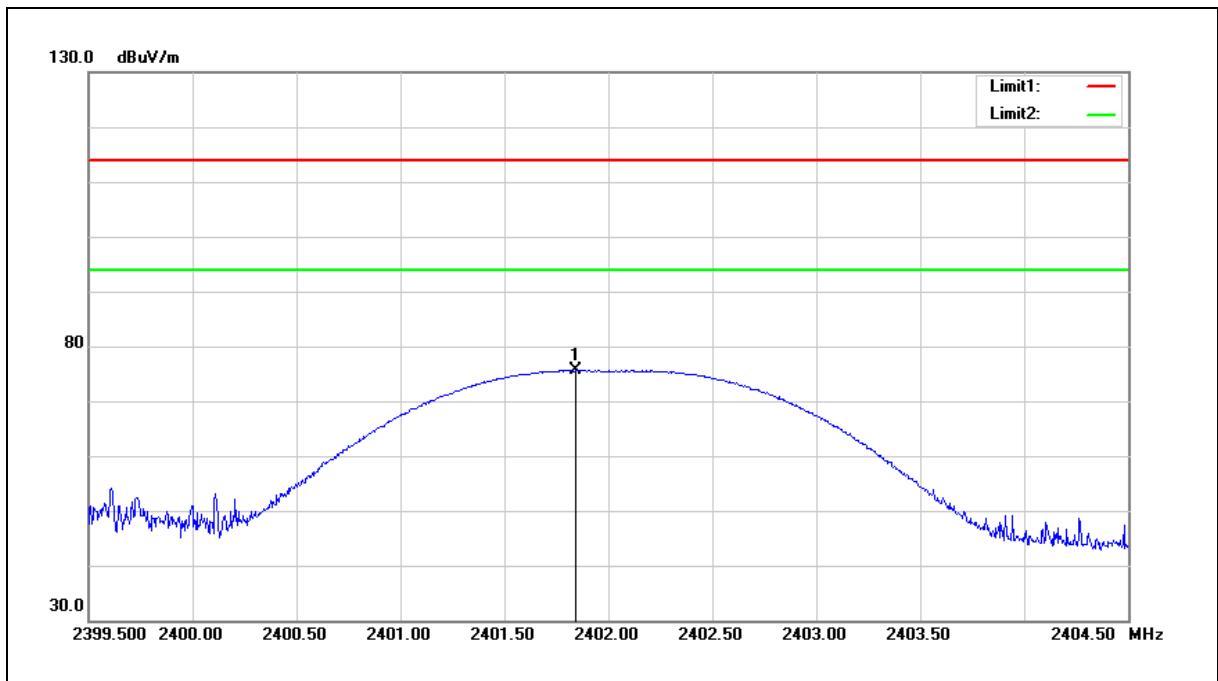

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2401.845	76.73	-1.13	75.60	114.00	-38.40	peak


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

Example: $75.60 = -1.13 + 76.73$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.249	Test Distance:	3 m
Test item:	Fundamental	Power:	DC 3.7 V
Frequency:	2440 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

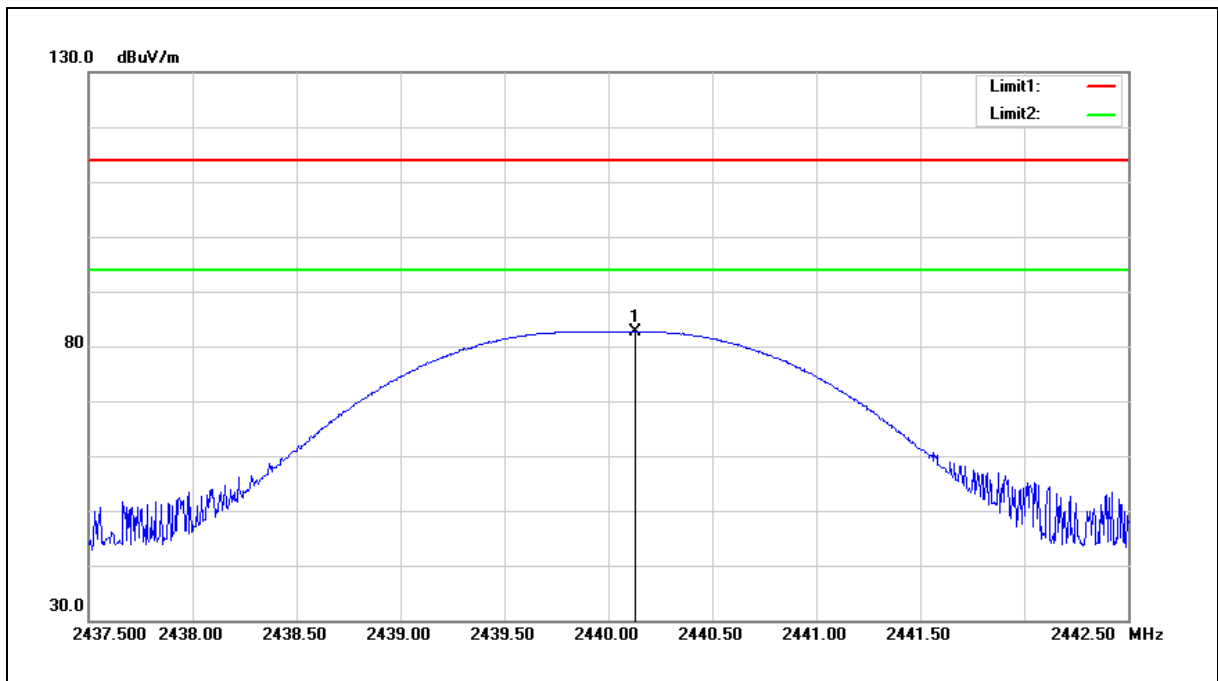


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2440.130	83.64	-0.98	82.66	114.00	-31.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.249	Test Distance:	3 m
Test item:	Fundamental	Power:	DC 3.7 V
Frequency:	2440 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

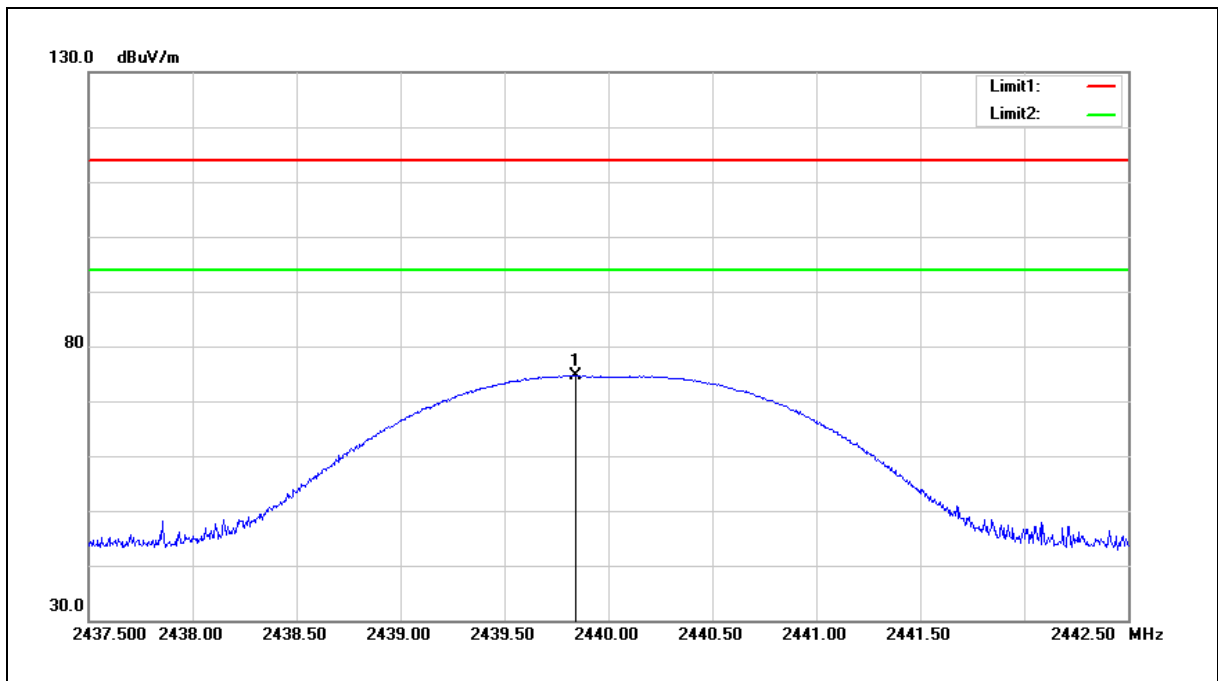


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2439.840	75.64	-0.98	74.66	114.00	-39.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.249	Test Distance:	3 m
Test item:	Fundamental	Power:	DC 3.7 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

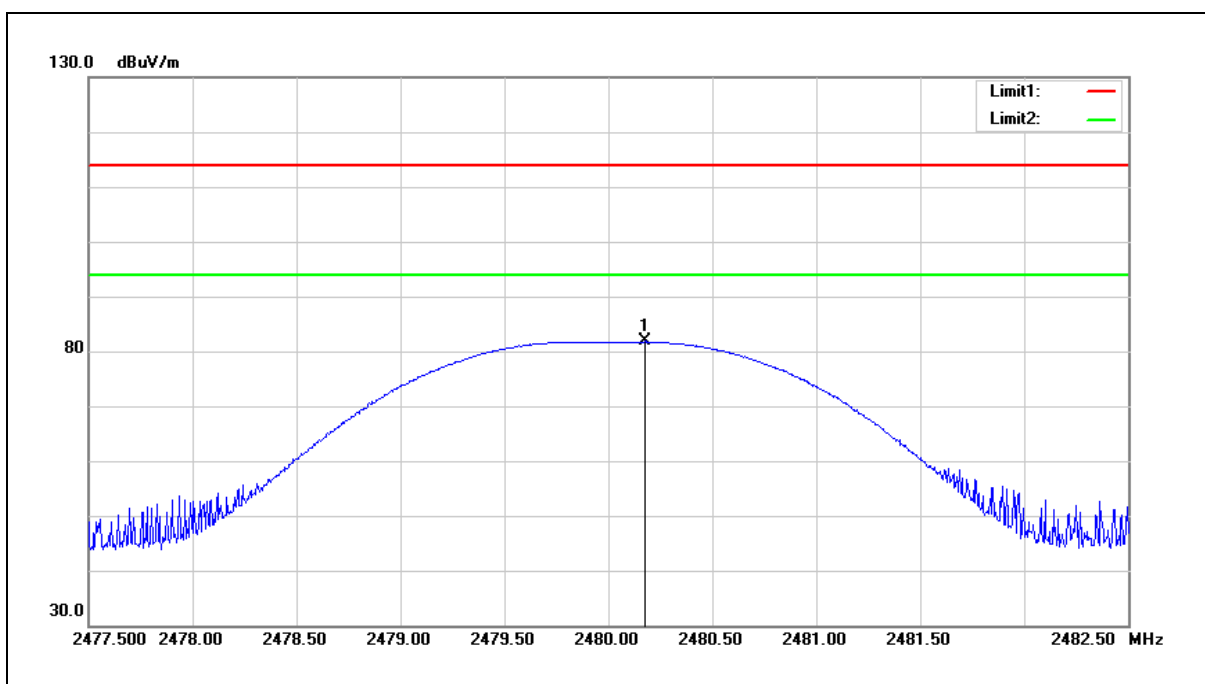


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.175	82.60	-0.83	81.77	114.00	-32.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.249	Test Distance:	3 m
Test item:	Fundamental	Power:	DC 3.7 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

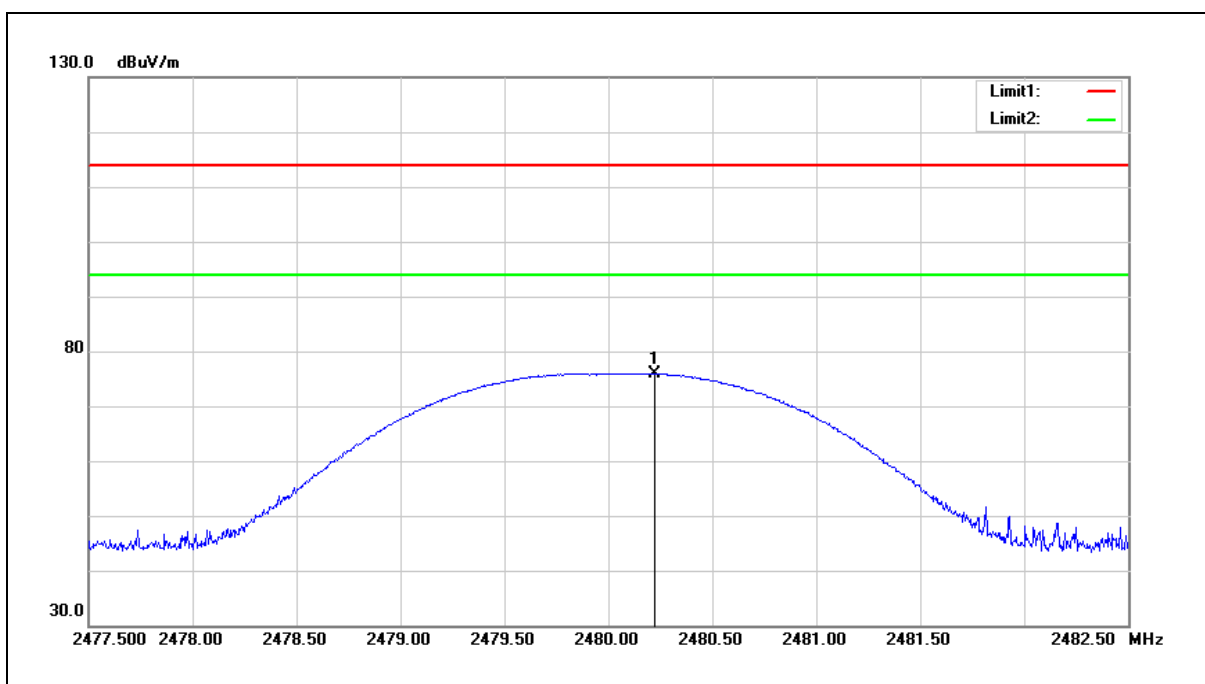

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.220	76.81	-0.83	75.98	114.00	-38.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Harmonic

Below 1 GHz

Standard:	FCC Part 15.249			Test Distance:	3 m		
Test item:	Harmonic			Power:	DC 3.7 V		
Frequency:	2402 MHz			Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH		
Test Mode:	Mode 1						
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar H / V
232.7300	27.31	-6.41	20.90	46.00	-25.10	QP	H
399.5700	28.02	-1.54	26.48	46.00	-19.52	QP	H
596.4800	30.34	2.68	33.02	46.00	-12.98	QP	H
691.5400	27.70	4.36	32.06	46.00	-13.94	QP	H
776.9000	28.30	6.43	34.73	46.00	-11.27	QP	H
888.4500	27.19	8.16	35.35	46.00	-10.65	QP	H
299.6600	26.84	-3.46	23.38	46.00	-22.62	QP	V
561.5600	29.33	1.66	30.99	46.00	-15.01	QP	V
704.1500	28.35	4.65	33.00	46.00	-13.00	QP	V
772.0500	28.68	6.34	35.02	46.00	-10.98	QP	V
844.8000	28.09	7.44	35.53	46.00	-10.47	QP	V
884.5700	28.47	8.09	36.56	46.00	-9.44	QP	V

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 20.90=-6.41+27.31

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Above 1 GHz

Standard:	FCC Part 15.249	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.7 V
Frequency:	2402 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

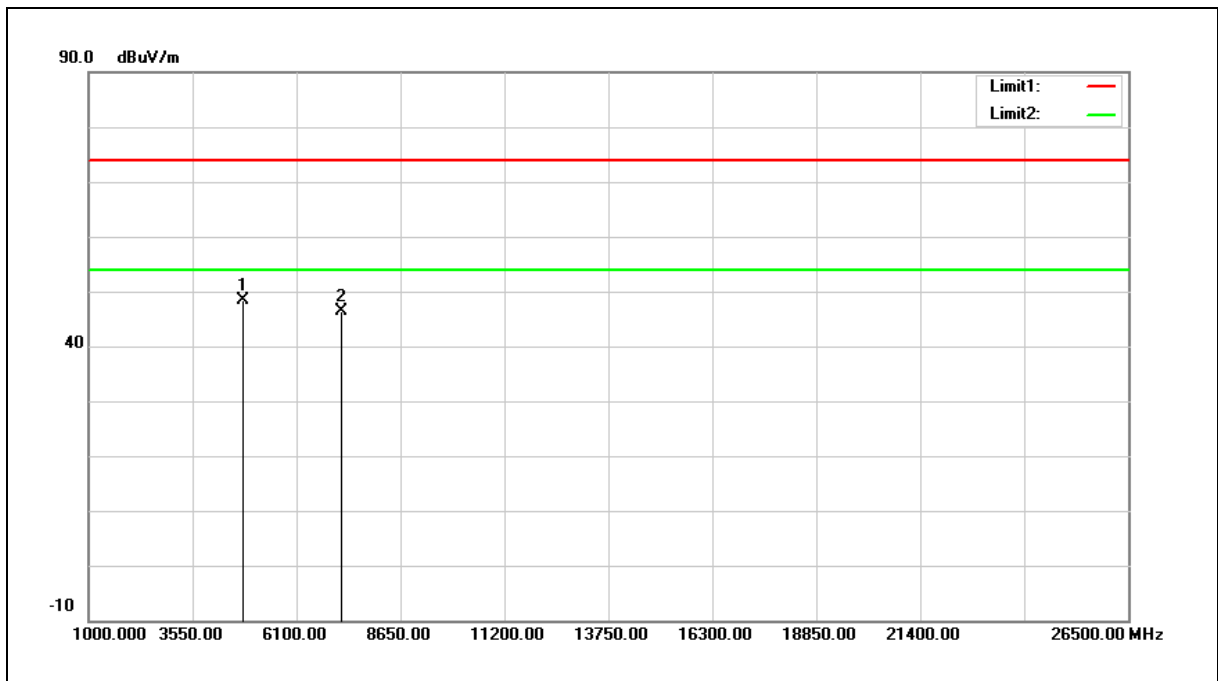

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	43.03	5.33	48.36	74.00	-25.64	peak
2	7206.000	34.52	11.79	46.31	74.00	-27.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 48.36=5.33+43.03

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.249	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.7 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

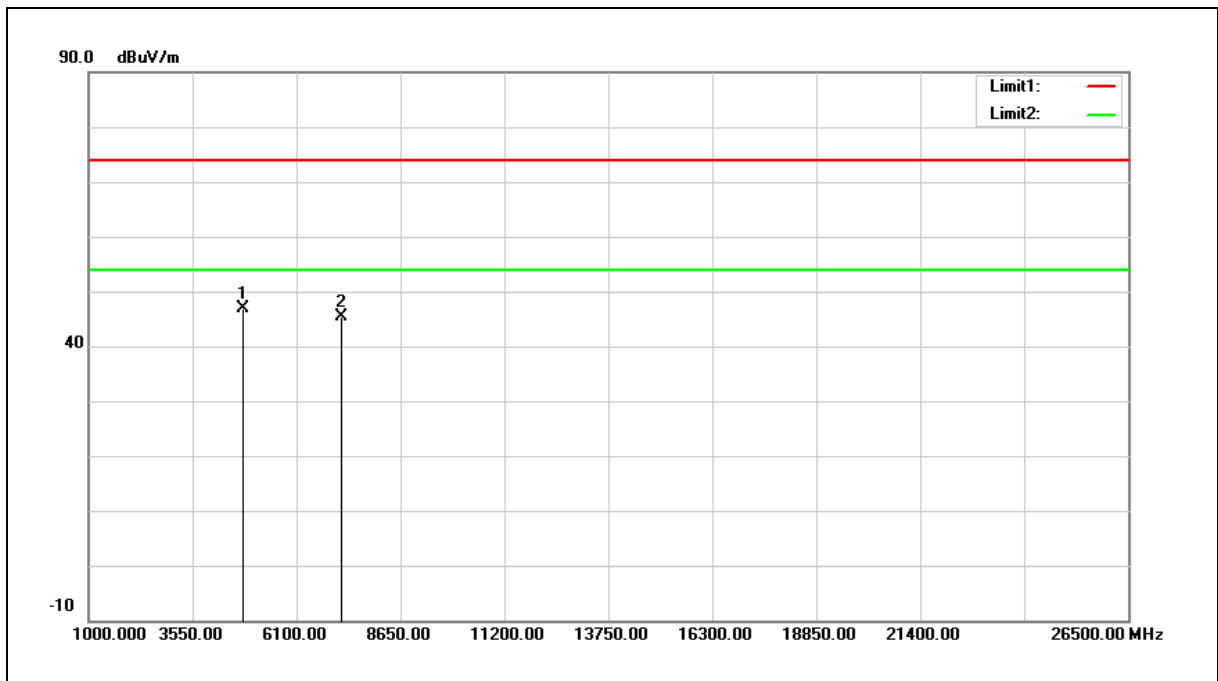

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	41.49	5.33	46.82	74.00	-27.18	peak
2	7206.000	33.52	11.79	45.31	74.00	-28.69	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).


Example: $46.82 = 5.33 + 41.49$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.249	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.7 V
Frequency:	2440 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

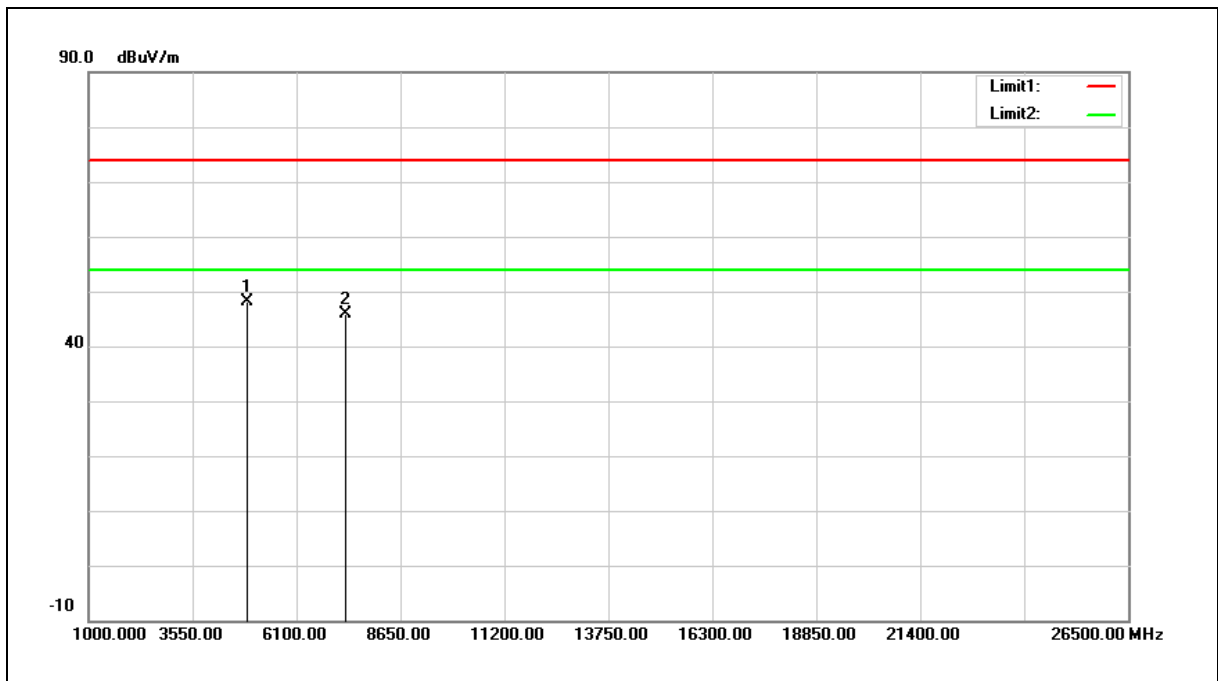


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	42.64	5.48	48.12	74.00	-25.88	peak
2	7320.000	33.69	12.16	45.85	74.00	-28.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.249	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.7 V
Frequency:	2440 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

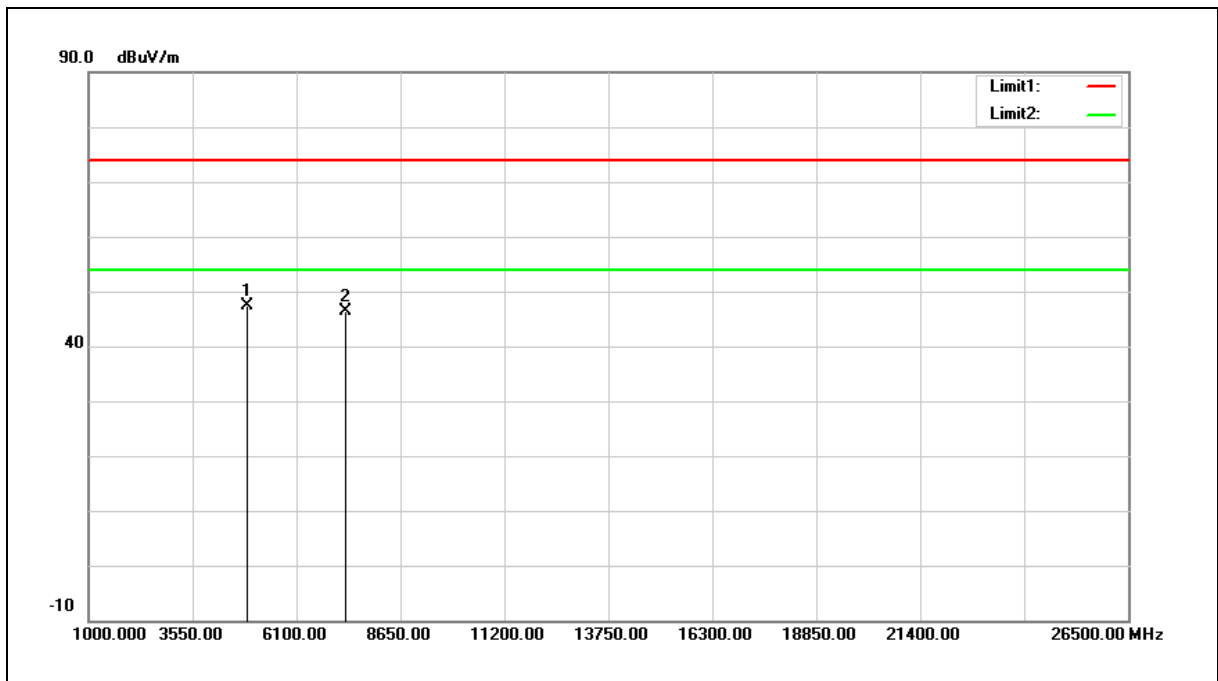


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	41.91	5.48	47.39	74.00	-26.61	peak
2	7320.000	34.30	12.16	46.46	74.00	-27.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.249	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.7 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

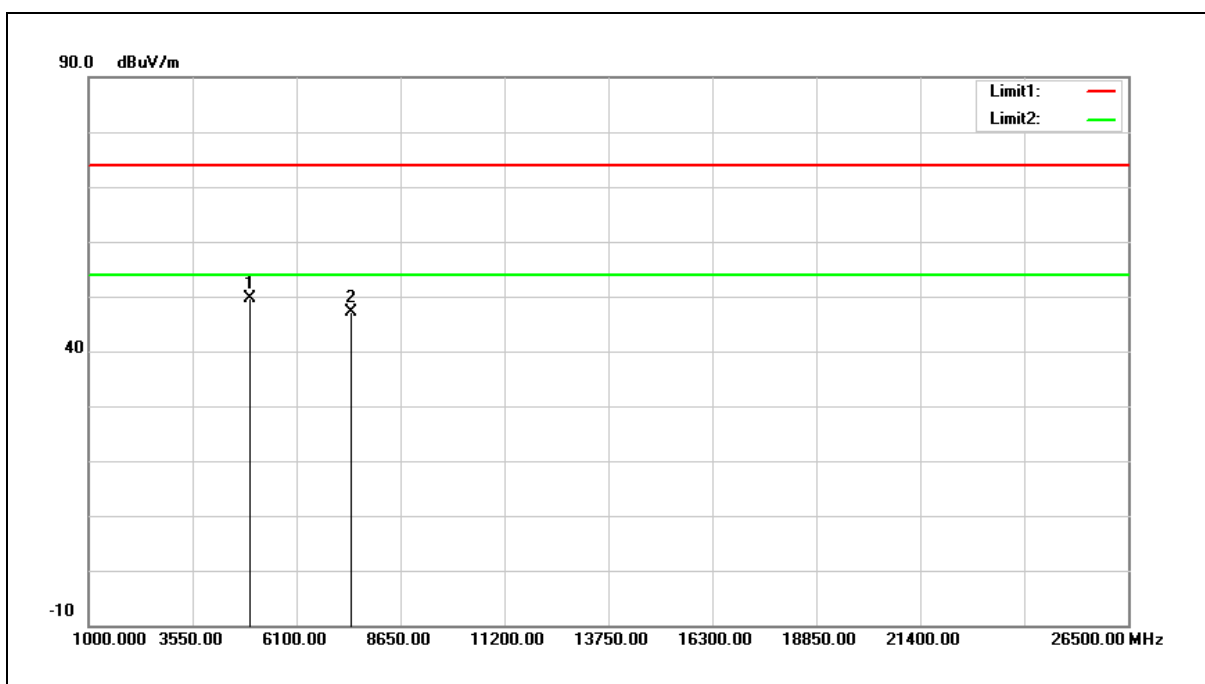


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	44.11	5.64	49.75	74.00	-24.25	peak
2	7440.000	34.63	12.53	47.16	74.00	-26.84	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.249	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.7 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

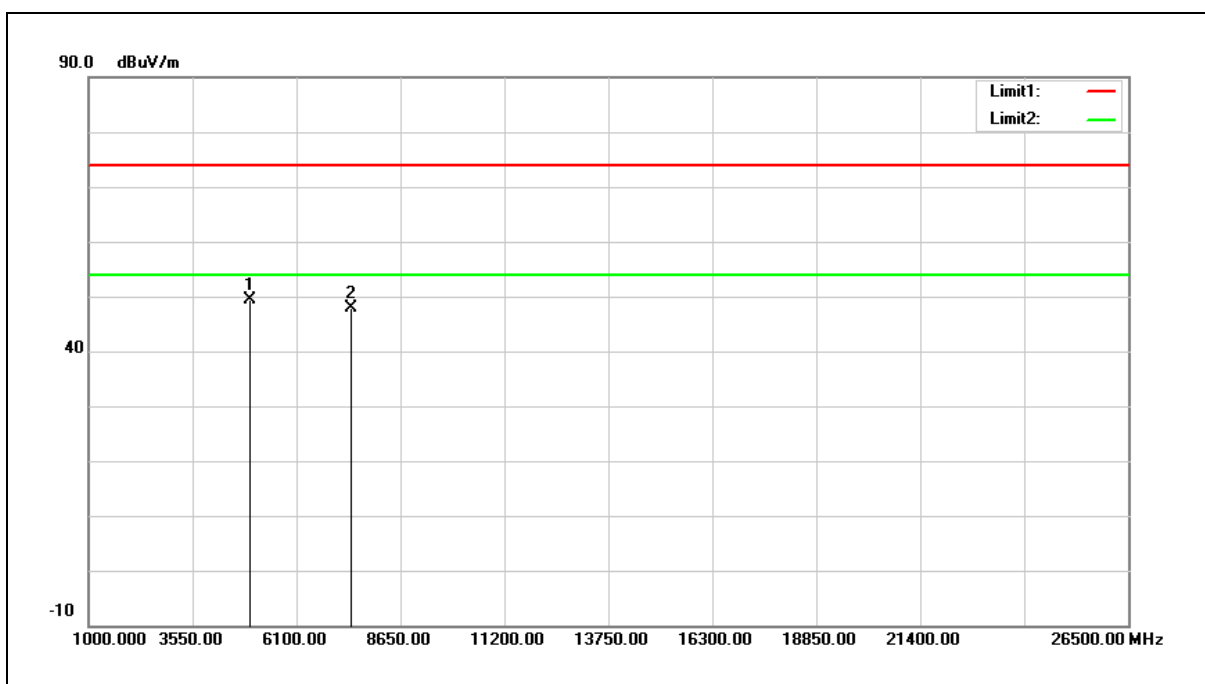

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	43.73	5.64	49.37	74.00	-24.63	peak
2	7440.000	35.33	12.53	47.86	74.00	-26.14	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Band edge

Standard:	FCC Part 15.249	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.7 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

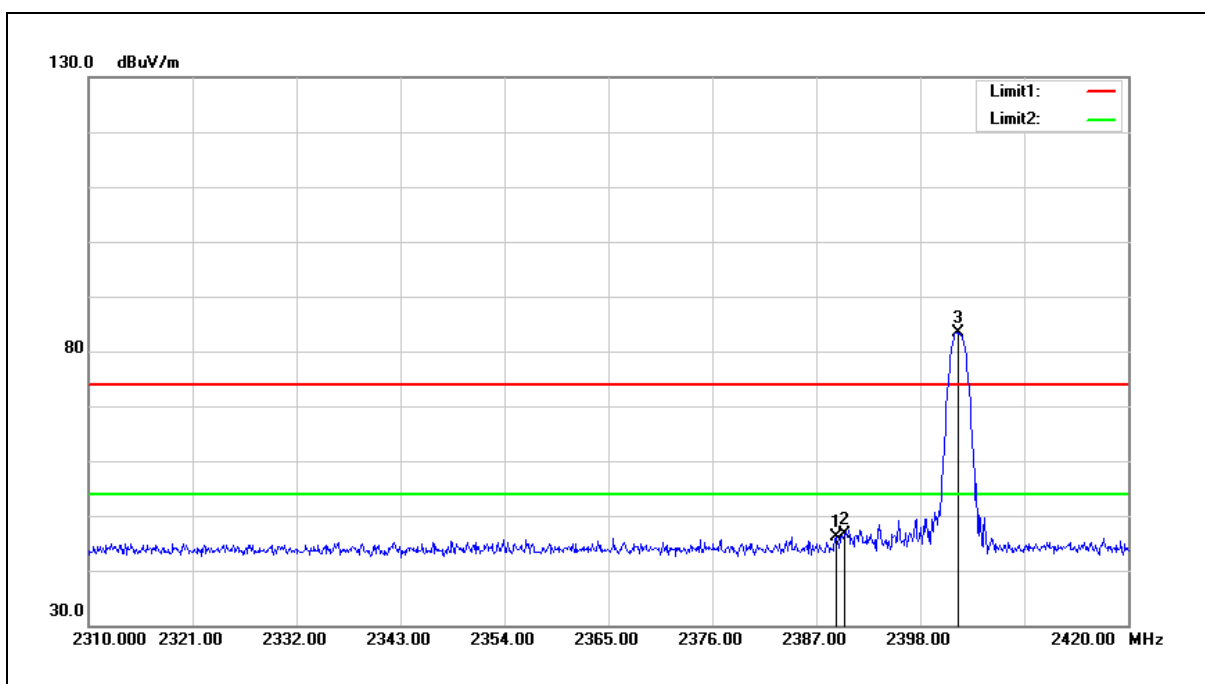


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.090	47.22	-1.17	46.05	74.00	-27.95	peak
2	2390.000	47.76	-1.17	46.59	74.00	-27.41	peak
3	2401.960	84.47	-1.12	83.35	---	---	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.249	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.7 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

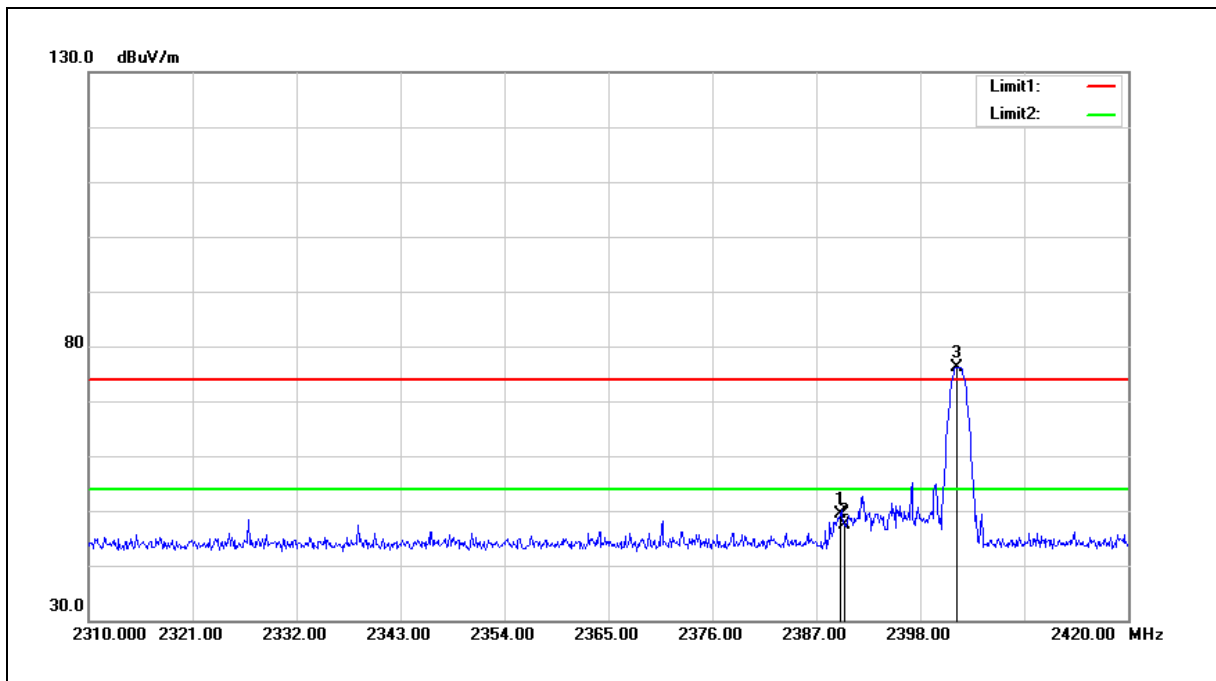


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.530	50.67	-1.17	49.50	74.00	-24.50	peak
2	2390.000	48.58	-1.17	47.41	74.00	-26.59	peak
3	2401.850	77.28	-1.13	76.15	---	---	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.249	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.7 V
Frequency:	2440 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

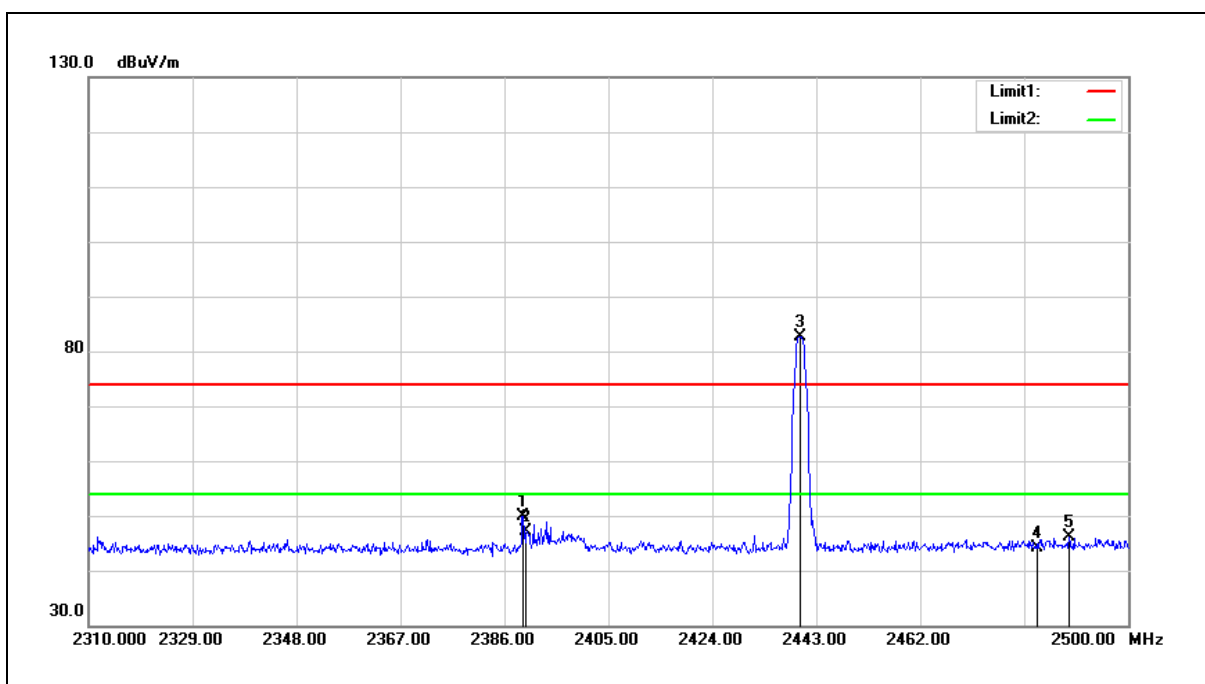


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	51.02	-1.17	49.85	74.00	-24.15	peak
2	2390.000	48.32	-1.17	47.15	74.00	-26.85	peak
3	2440.150	83.62	-0.98	82.64	---	---	peak
4	2483.500	44.88	-0.82	44.06	74.00	-29.94	peak
5	2489.170	46.91	-0.80	46.11	74.00	-27.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.249	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.7 V
Frequency:	2440 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

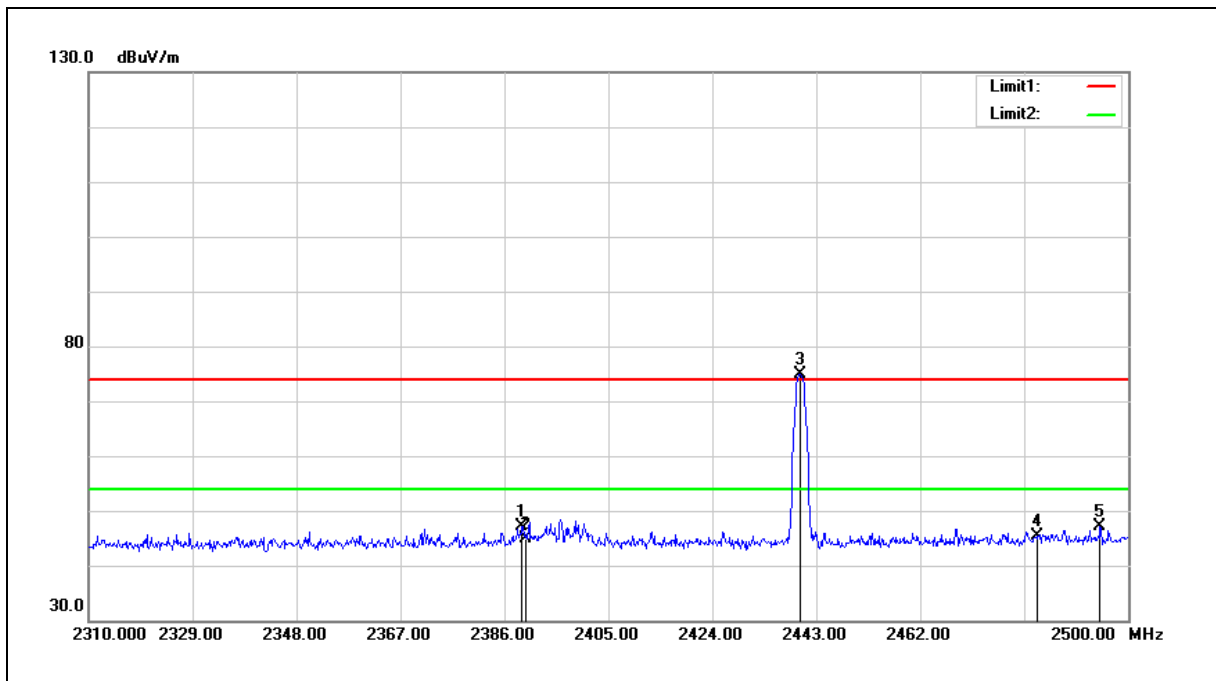


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.230	48.27	-1.17	47.10	74.00	-26.90	peak
2	2390.000	46.03	-1.17	44.86	74.00	-29.14	peak
3	2439.960	75.87	-0.98	74.89	---	---	peak
4	2483.500	46.10	-0.82	45.28	74.00	-28.72	peak
5	2494.870	47.90	-0.78	47.12	74.00	-26.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.249	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.7 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

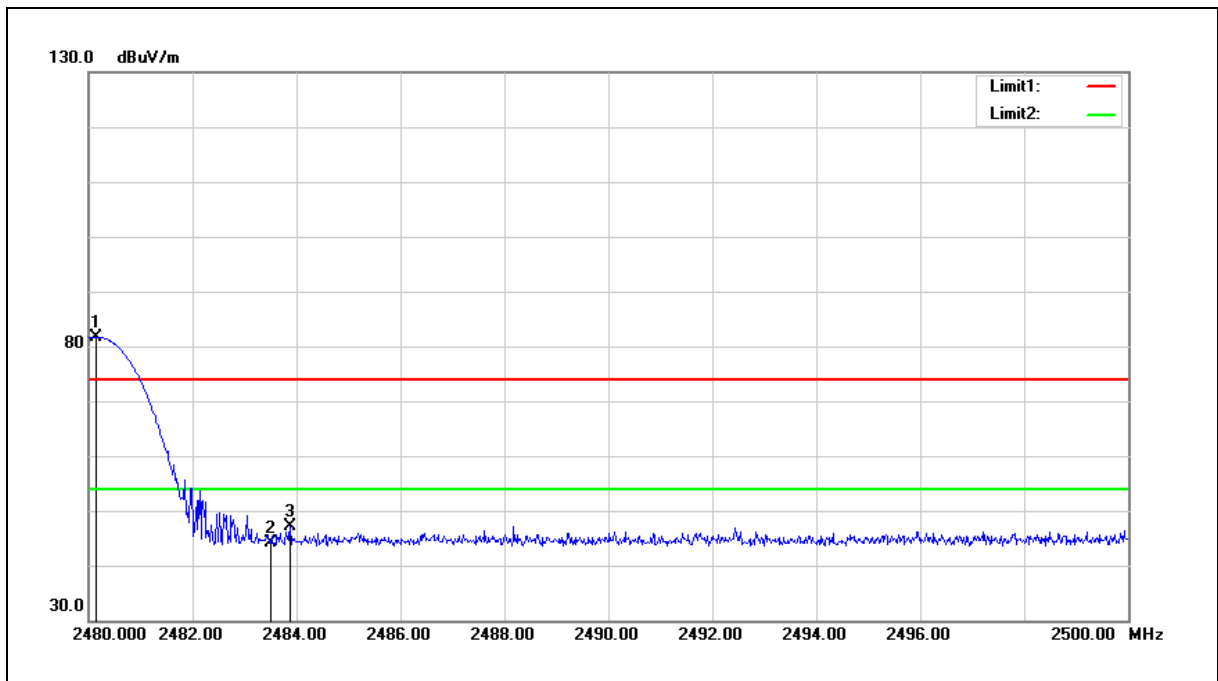


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.140	82.50	-0.83	81.67	---	---	peak
2	2483.500	45.01	-0.82	44.19	74.00	-29.81	peak
3	2483.880	47.91	-0.82	47.09	74.00	-26.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.249	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.7 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

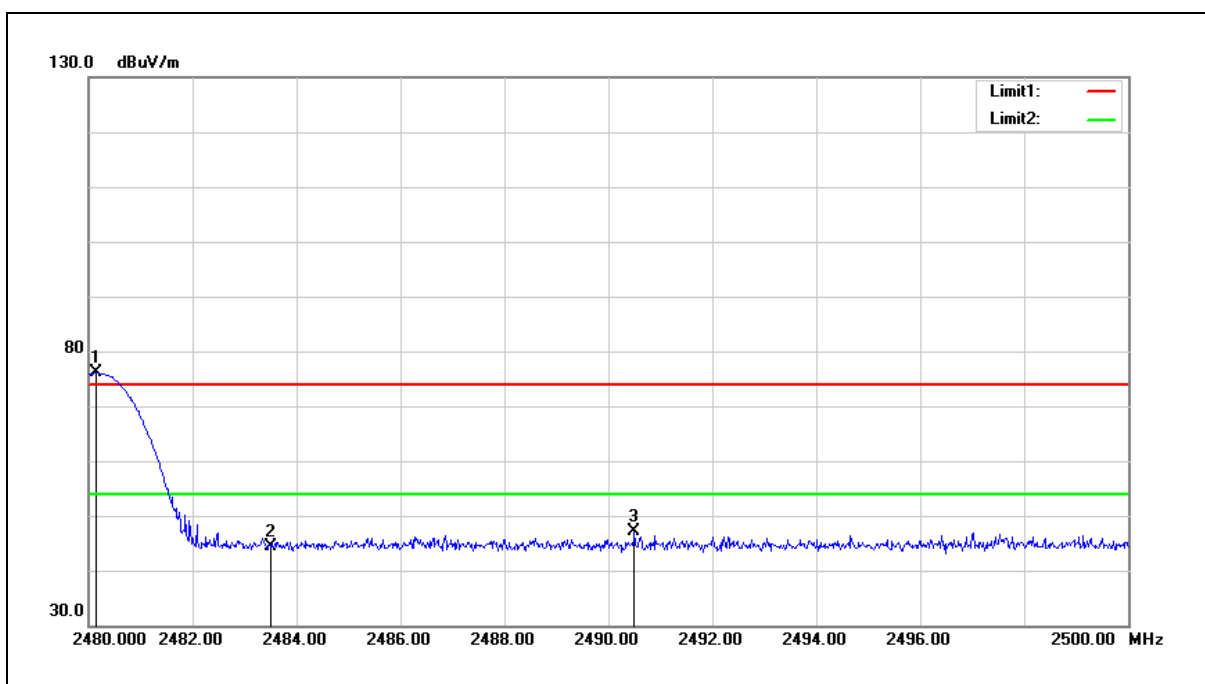

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.140	76.95	-0.83	76.12	---	---	peak
2	2483.500	45.18	-0.82	44.36	74.00	-29.64	peak
3	2490.500	47.80	-0.79	47.01	74.00	-26.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.