

TDI-700/2500-K

Directional Wall Mount Antenna

SKU# 98011053



Applications:

CDMA800 /3G/WLAN
698 to 960/1700 to 2700MHz band
Indoor coverage system


Features:

Broadband, Cover 700 - 2700MHz
common system
Light weight, Small size
UV stable ABS radome

Specifications:

Model	TDI-700/2500-K	
Frequency Range - MHz	698-960	1700-2700
Typical Gain - dBi	7	10
Typical Beamwidth - °	E:55 H:70	E:45 H:60
VSWR	≤2.0	≤1.5
Impedance Ω	50	
Polarization	Vertical	
Max Power - W	50	
Connector	N Female or Customized	
Dimesnsions - mm	210 x 180 x 44	
Weight - Kg	0.4	
Color	White	
Mounting	Wall Mounting	

Installation Sketch:

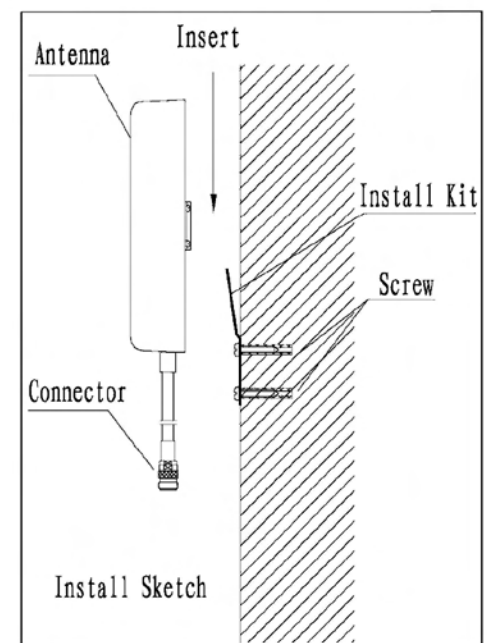

Model #: TQI-4FC-5
Wide Band High Gain Ceiling Antenna
SKU# 98021012

Specifications		
Model	TQI-4FC-5	
Frequency Range-MHz	698~960	1710~2700
Gain-dBi	2	5
VSWR	≤2.5 698~806	
	≤1.5 806~960/1710~2500	
	≤2.0 2500~2700	
Impedance-Ω	50	
Polarization	Vertical	
Maximum Power (W)	100	
Connector	N-Female	
Dimension-mm	φ170×72	
Weight-Kg	0.4	
Mounting way	Fixed with Nut	




Applications

- 698~960/1710~2700MHz Band
- Indoor coverage system
- Wireless communication system
- Wireless data transmission
- TDD/FDD-LTE

Features

- 698~960/1710~2700MHz band
- Low VSWR
- Support current main popular communication system
- ABS Radome
- Ceiling mount, easy to install

Installation

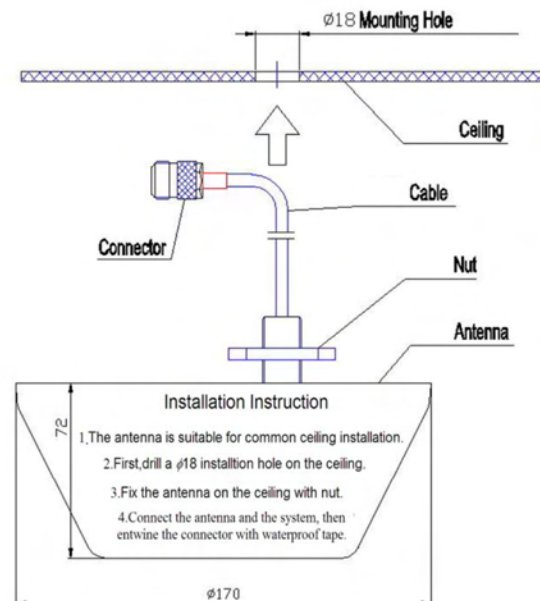



Wide Band Log Periodic YAGI Antenna


Model #: TDJ-800/2500YG



Specifications		
Model	TDJ-800/2500YG	
Frequency Range (MHz)	800-960	1710-2500
Gain (dBi)	9.5	11
Vertical Plane Polarization	60°	50°
Horizontal Plane Polarization	80°	60°
VSWR	≤ 1.5 : 1	
Front-to-Back Ratio (dB)	≥ 20	
Impedence (Ω)	50	
Polarization	Vertical	
Maximum Power (W)	100	
Connector	N-Female	
Antenna Dimensions (mm)	330 x 215 x 65	
Mast Mount Diameter (mm)	40 - 50	
Weight (Kg)	1.1	

Radiation Pattern:

E-Plane

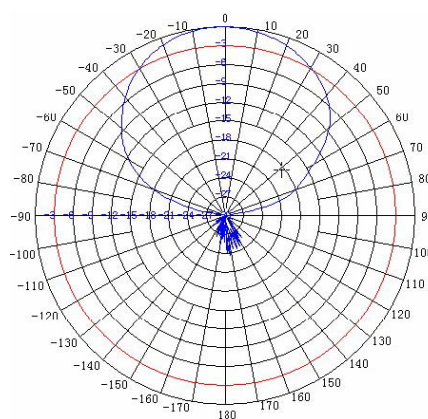

H-Plane

