
FCC Test Report

Report No.: AGCW03120801F2

FCC ID : Q8UHT-WM11M
PRODUCT DESIGNATION : 11n Wireless USB Module
BRAND NAME : Hong Tech
MODEL NAME : HT-WM11M,HT-WM11F
CLIENT : HongTech Electronics Co., Ltd.
DATE OF ISSUE : Sep. 19, 2012
STANDARD(S) : FCC Part 15 Rules
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.

CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

VERIFICATION OF COMPLIANCE

Applicant	HongTech Electronics Co., Ltd.
	5F,NO.13-20,SEC.6,MIN-CHIUAN E.RD.,NEI-HU,TAIPEI,TAIWAN R.O.C
Manufacturer	Shenzhen Kingnet Technology Co,Ltd
	6F.Building 4,Civil Science Industry Zone, Pingshan, Nanshan District, Shenzhen, Guangdong, P.R.C
Product Designation	11n Wireless USB Module
Brand Name	Hong Tech
Test Model	HT-WM11M
Series Model:	HT-WM11F
Model Difference:	The connectors of model are diferent
FCC ID	Q8UHT-WM11M
Report Number	AGCW03120801F2
Date of Test	Sep. 10 to Sep. 15, 2012

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Test By:



Bart Xie

Sep.19, 2012

Reviewed By:



Forrest Lei

Sep.19, 2012

Authorized By:



Solger Zhang

Sep.19, 2012

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION	4
1.2 TABLE OF CARRIER FREQUENCYS	4
1.3 IEEE 802.11N MODULATION SCHEME	5
1.4 RELATED SUBMITTAL(S) / GRANT (S)	5
1.5 TEST METHODOLOGY	5
1.6 TEST FACILITY	5
1.7 SPECIAL ACCESSORIES	5
1.8 EQUIPMENT MODIFICATIONS	5
2. SYSTEM TEST CONFIGURATION	6
2.1 CONFIGURATION OF EUT SYSTEM	6
2.2 EQUIPMENT USED IN EUT SYSTEM	6
3. SUMMARY OF TEST RESULTS	7
4. DESCRIPTION OF TEST MODES	7
5. PEAK OUTPUT POWER	8
5.1 MEASUREMENT PROCEDURE	8
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	8
5.3 MEASUREMENT EQUIPMENT USED	8
5.4 LIMITS AND MEASUREMENT RESULT	9
6. 6 DB BANDWIDTH	11
6.1 MEASUREMENT PROCEDURE	11
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	11
6.3 MEASUREMENT EQUIPMENT USED	11
6.4 LIMITS AND MEASUREMENT RESULTS	11
7. CONDUCTED SPURIOUS EMISSION	19
7.1 MEASUREMENT PROCEDURE	19
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	19
7.3 MEASUREMENT EQUIPMENT USED	19
7.4 LIMITS AND MEASUREMENT RESULT	19
8. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	22
8.1 MEASUREMENT PROCEDURE	22
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	22
8.3 MEASUREMENT EQUIPMENT USED	22
8.4 LIMITS AND MEASUREMENT RESULT	22
9. RADIATED EMISSION MEASUREMENT	30
9.1 MEASUREMENT PROCEDURE	30
9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	30
9.3 MEASUREMENT EQUIPMENT USED	31
9.4 LIMITS AND MEASUREMENT RESULT	32
10. BAND EDGE EMISSION	37
10.1 MEASUREMENT PROCEDURE	37
10.2 TEST SET-UP	37
10.3 TEST RESULT	37
11. FCC LINE CONDUCTED EMISSION TEST	54

11.1 LIMITS OF LINE CONDUCTED EMISSION TEST 54

11.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST..... 54

11.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 55

11.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 55

11.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST 56

APPENDIX I..... 58

PHOTOGRAPHS OF THE EUT..... 58

APPENDIX II..... 60

PHOTOGRAPHS OF THE TEST SETUP 60

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

The EUT is designed as an “Wifi Device”. It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.412 GHz to 2.462GHz
Max. Output Power	11b:12.57dBm,11g:11.49dBm,11n(20):10.46dBm,11n(40):10.35dBm
Modulation	CCK/OFDM: BPSK,GPSK,16-QAM,64-QAM
Data Rate	DSSS(1/2/5.5/11),OFDM(6/9/12/18/24/36/48/54) See section 1.3 for 802.11n
Number of channels	11
Antenna Designation	Integrated Antenna
Antenna Gain	Antenna (max): 2.0dBi
Power Supply	DC 3.7V by lithium battery

1.2 TABLE OF CARRIER FREQUENCIES

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	1	2412MHZ
	2	2417MHZ
	3	2422 MHZ
	4	2427 MHZ
	5	2432 MHZ
	6	2437 MHZ
	7	2442 MHZ
	8	2447 MHZ
	9	2452 MHZ
	10	2457 MHZ
	11	2462MHZ

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11
For 40MHZ bandwidth system use Channel 3 to Channel 9

1.3 IEEE 802.11N MODULATION SCHEME

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Data rate(Mbps)	
									800nsGI	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

1.4 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: Q8UHT-WM11M**, filing to comply with the FCC Part 15 requirements.

1.5 TEST METHODOLOGY

Because the EUT received power from DC3.7V lithium battery, so only radiated testing was performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.6 TEST FACILITY

The test site used to collect the radiated data is located on the address of Attestation of Global Compliance (Shenzhen) Co., Ltd. 2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 and IC requirements in documents RS212.

FCC register No.: 259865

1.7 SPECIAL ACCESSORIES

Refer to section 2.2.


1.8 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2. SYSTEM TEST CONFIGURATION

2.1 CONFIGURATION OF EUT SYSTEM

Configure 1 (Control continuous TX through PC)

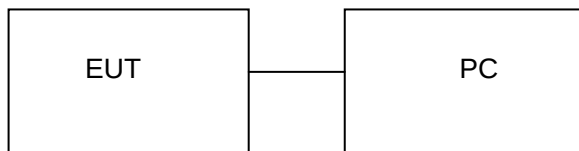

Note: All the accessories have been used during the test.

2.2 EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	11n Wireless USB Module	N/A	HT-WM11M	EUT
2	PC	Dell	Inpiron N4110	A.E

Note: the following “EUT” in setup diagram means EUT system.

3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Peak Output Power	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.247	Maximum Conducted Output Power SPECTRAL Density	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant

*****Note:**

The EUT received power from DC3.7V lithium battery.

4. DESCRIPTION OF TEST MODES

TEST MODES
Low Channel(TX)
Middle Channel(TX)
High Channel(TX)

Note: Transmit by 802.11b with Data rate(1/2/5.5/11)
Transmit by 802.11g with Data rate (6/9/12/18/24/36/48/54)
Transmit by 802.11n (20MHz) with Data rate(6.5/13/19.5/26/39/52/58.5/65)
Transmit by 802.11n (40MHz) with Data rate
(13.5/27/40.5/54/81/108/121.5/135)

- Note: 1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency individually.
2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report.
3. For Radiated Emission, 3 axis were chosen for testing for each applicable modes.


5. PEAK OUTPUT POWER

5.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Connect EUT RF output port to power meter through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Set the RBW greater than 6DB bandwidth of emission.
5. Record the maximum power from the power meter.
6. The maximum peak power shall be less 1 Watt (30dBm).

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

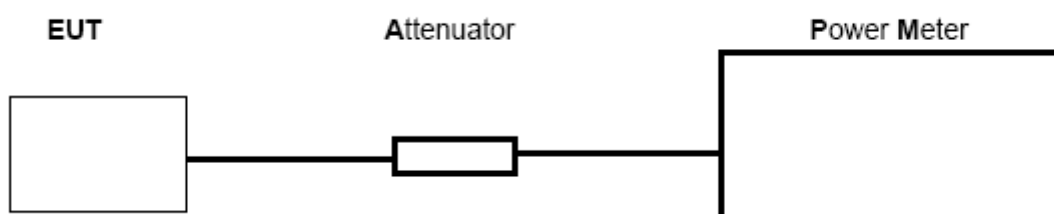

5.3 MEASUREMENT EQUIPMENT USED

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Power meter	R&S	NRP-Z23	N/A	07/18/2012	07/17/2013
RF attenuator	N/A	RFA20db	N/A	N/A	N/A
AGILENT	Agilent	E4440A	N/A	07/18/2012	07/17/2013

5.4 LIMITS AND MEASUREMENT RESULT

TEST ITEM	PEAK POWER
TEST MODE	802.11b with data rate 1

	LIMITS AND MEASUREMENT RESULT			
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	11.42	12.44	30	Pass
2.437	11.45	12.57	30	Pass
2.462	11.54	12.55	30	Pass

TEST ITEM	PEAK POWER
TEST MODE	802.11g with data rate 6

	LIMITS AND MEASUREMENT RESULT			
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	10.42	11.38	30	Pass
2.437	10.58	11.44	30	Pass
2.462	10.46	11.49	30	Pass

TEST ITEM	PEAK POWER
TEST MODE	802.11n 20 with data rate 6.5

	LIMITS AND MEASUREMENT RESULT			
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	9.85	10.35	30	Pass
2.437	9.74	10.46	30	Pass
2.462	9.78	10.41	30	Pass

TEST ITEM	PEAK POWER
TEST MODE	802.11n 40 with data rate 13.5

	LIMITS AND MEASUREMENT RESULT			
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.422	9.82	10.35	30	Pass
2.437	9.84	10.37	30	Pass
2.452	9.64	10.33	30	Pass


6. 6 DB BANDWIDTH

6.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz,
VBW $\geq$ RBW.
4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

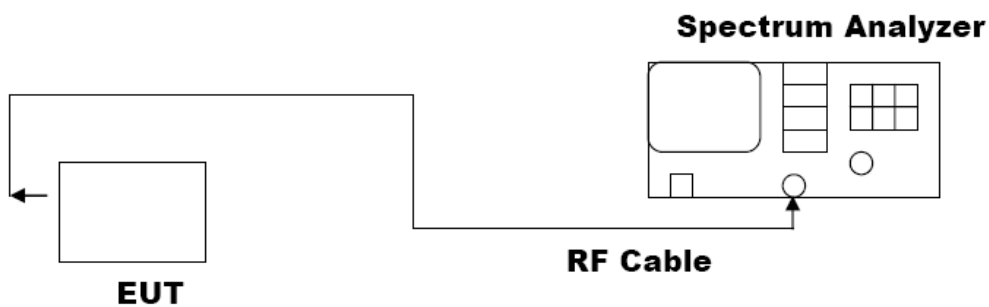

6.3 MEASUREMENT EQUIPMENT USED

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	07/18/2012	06/17/2013
RF attenuator	N/A	RFA20db	N/A	N/A	N/A

6.4 LIMITS AND MEASUREMENT RESULTS

TEST ITEM	6DB BANDWIDTH
TEST MODE	802.11b with data rate 11

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
>500KHZ	Low Channel	10.07	PASS
	Middle Channel	9.53	PASS
	High Channel	9.13	PASS

TEST ITEM	6DB BANDWIDTH
TEST MODE	802.11g with data rate 54

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
>500KHZ	Low Channel	16.61	PASS
	Middle Channel	16.60	PASS
	High Channel	16.61	PASS

TEST ITEM	6DB BANDWIDTH
TEST MODE	802.11n 20 with data rate 65


LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
>500KHZ	Low Channel	17.66	PASS
	Middle Channel	17.68	PASS
	High Channel	17.66	PASS

TEST ITEM	6DB BANDWIDTH
TEST MODE	802.11n 40 with data rate 135


LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
>500KHZ	Low Channel	36.56	PASS
	Middle Channel	36.57	PASS
	High Channel	36.53	PASS

802.11b TEST RESULT


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

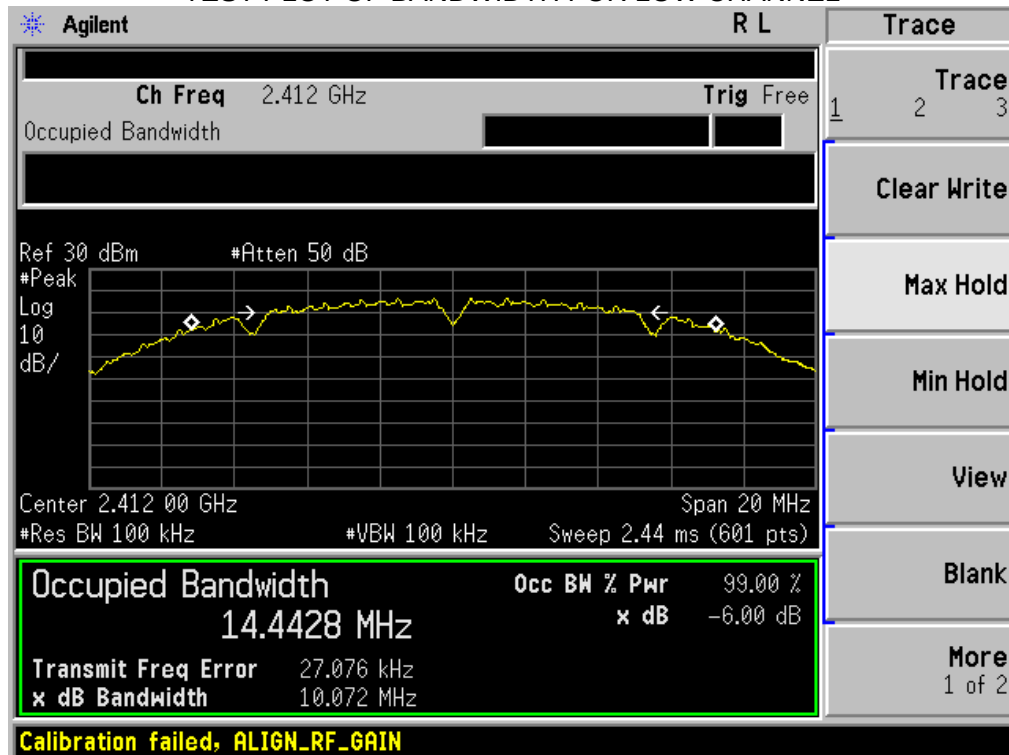

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

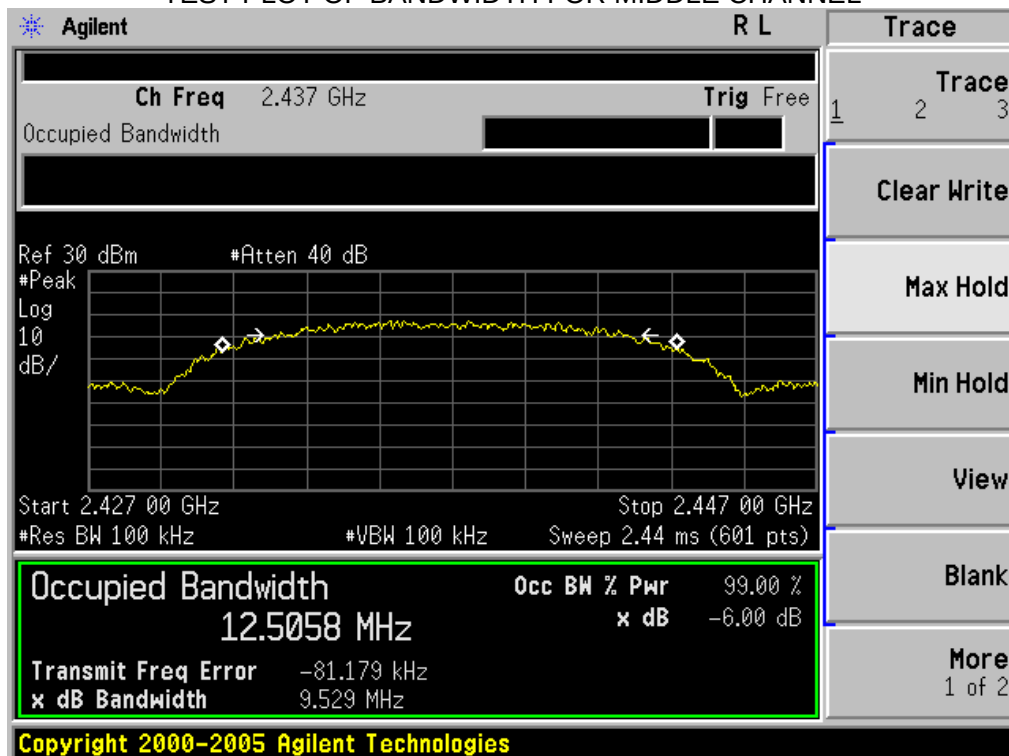


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

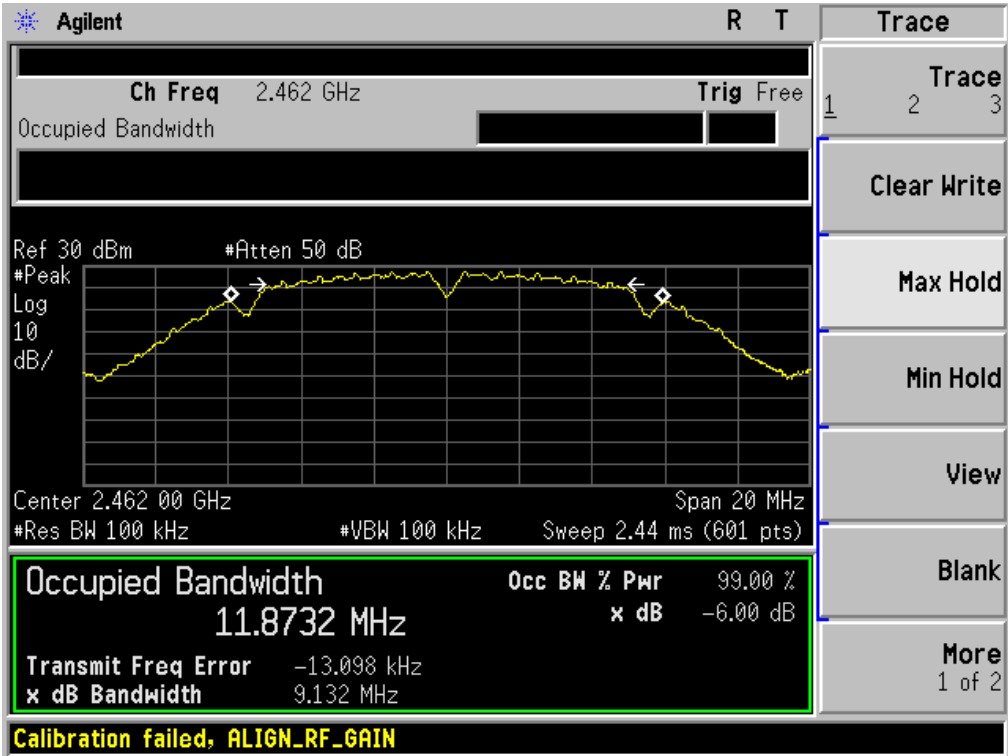


802.11g TEST RESULT


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

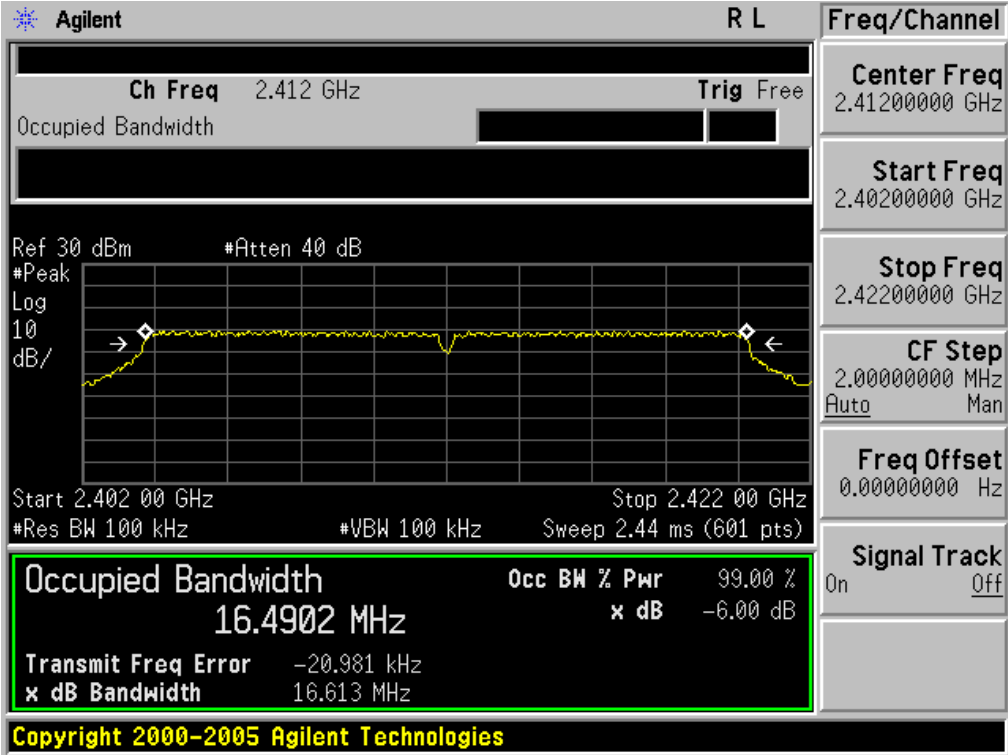

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

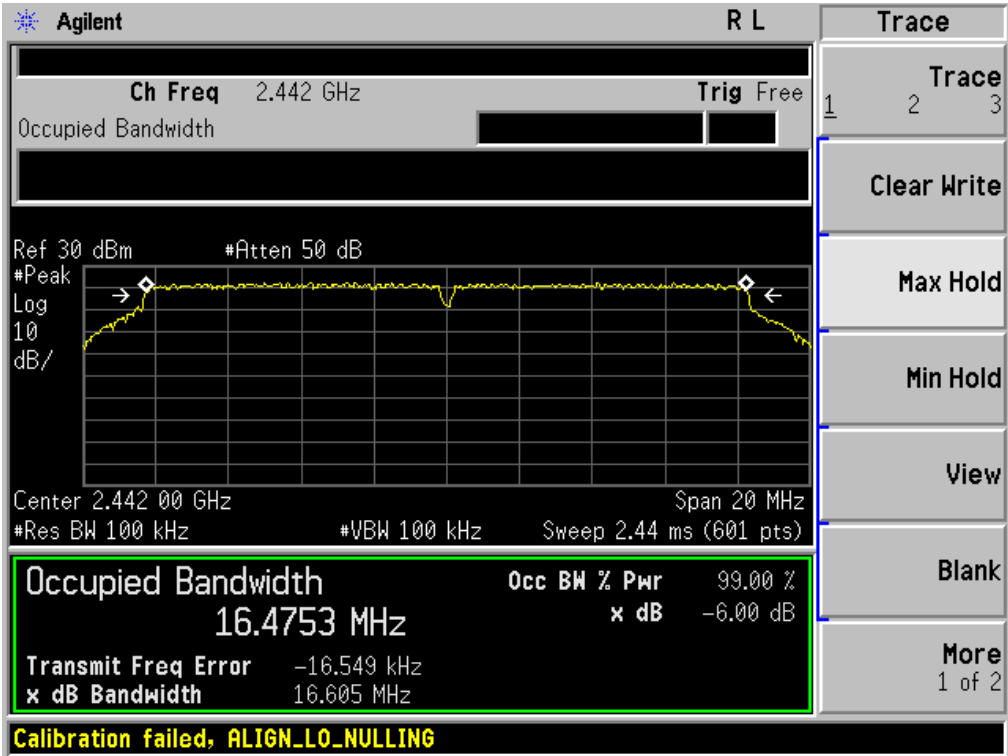


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

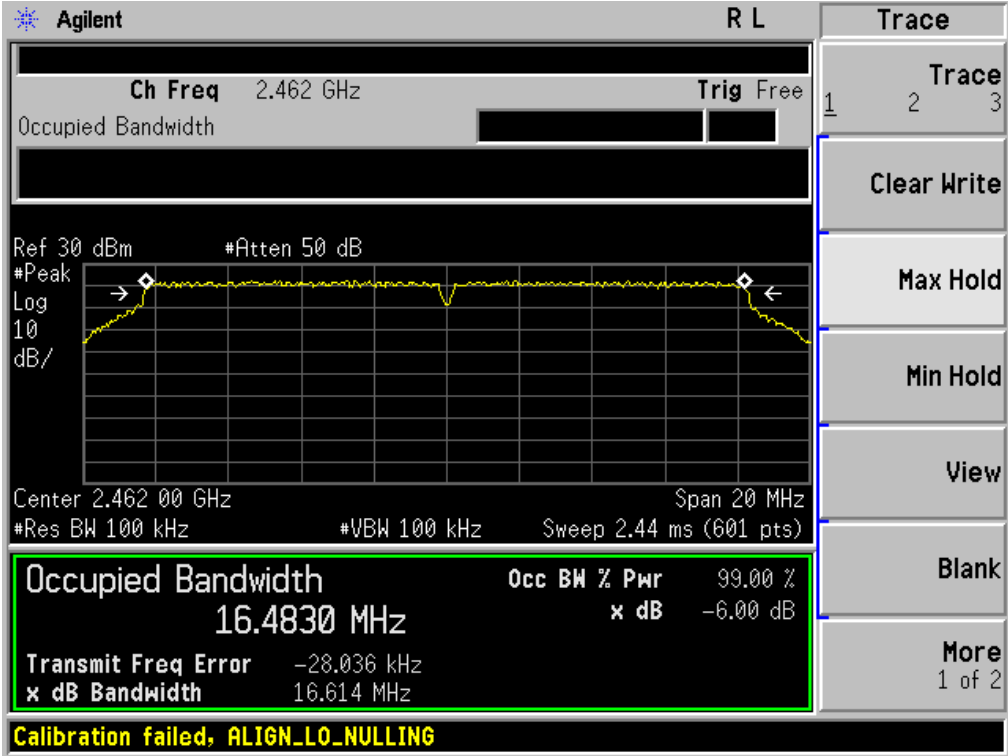


802.11n(20) TEST RESULT


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

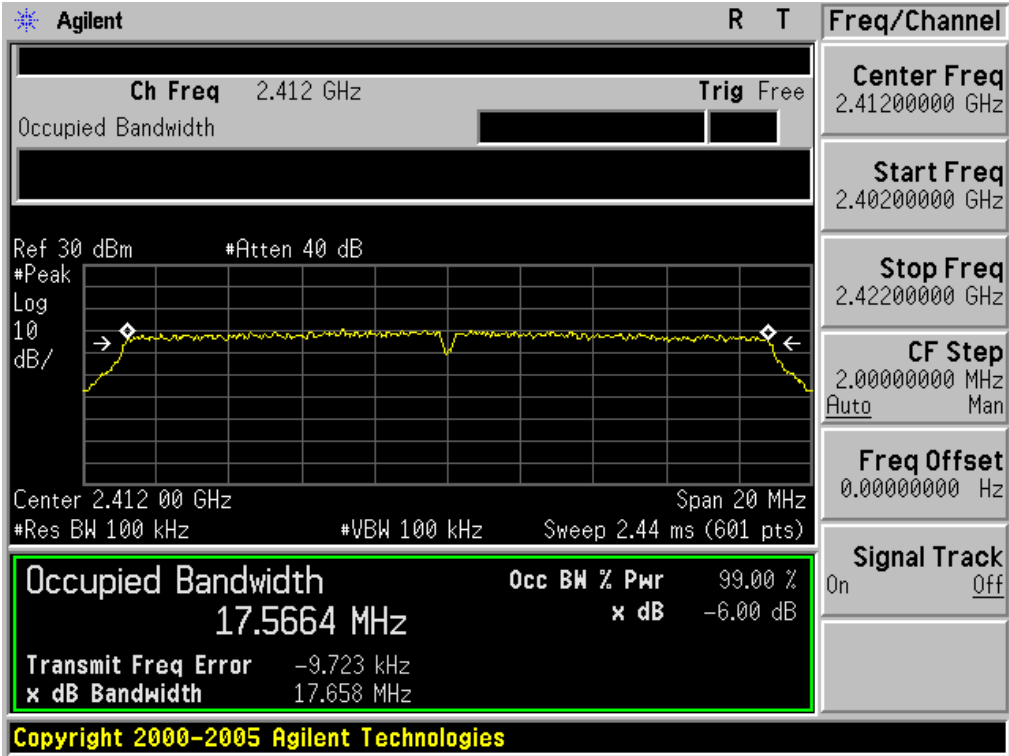

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

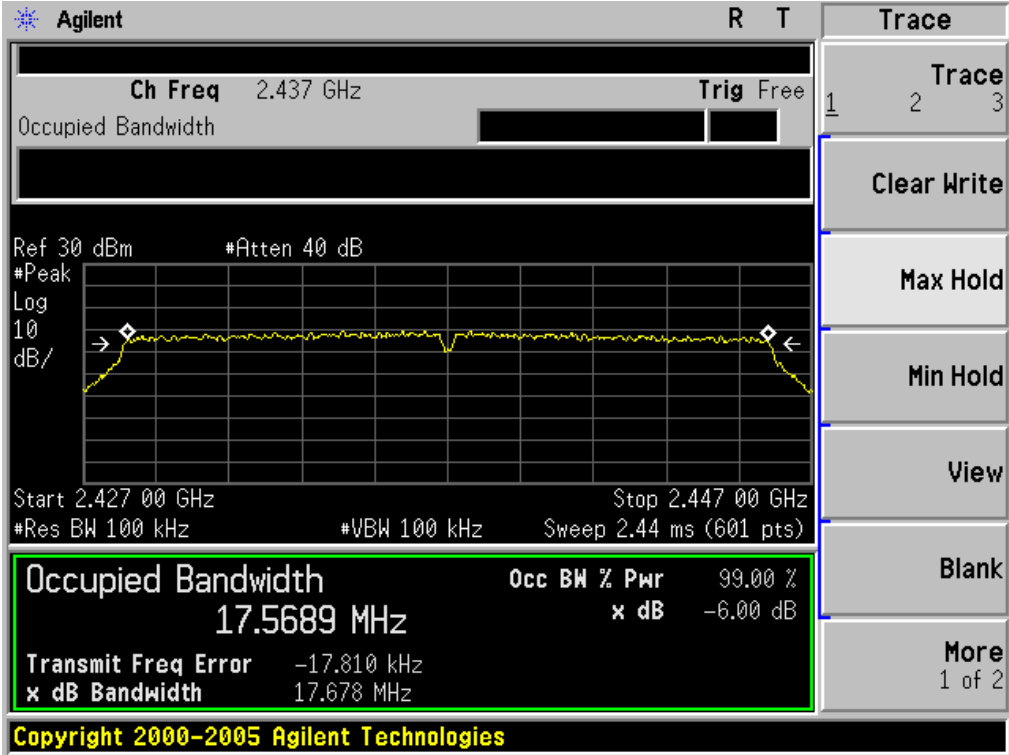


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

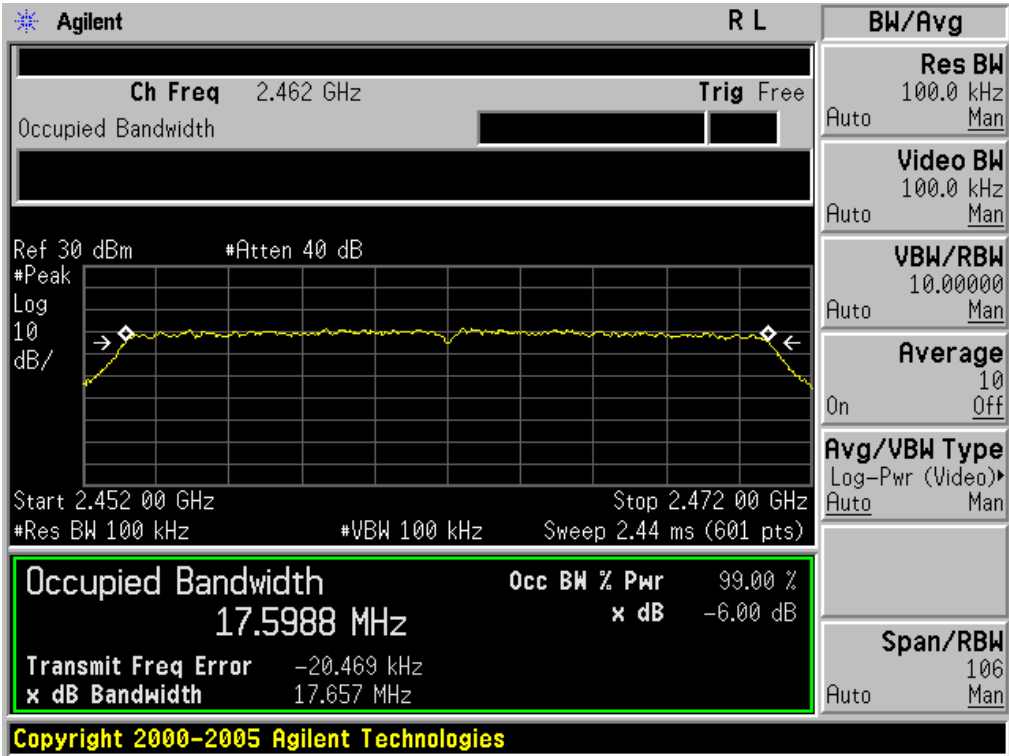


802.11n 40 TEST RESULT


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

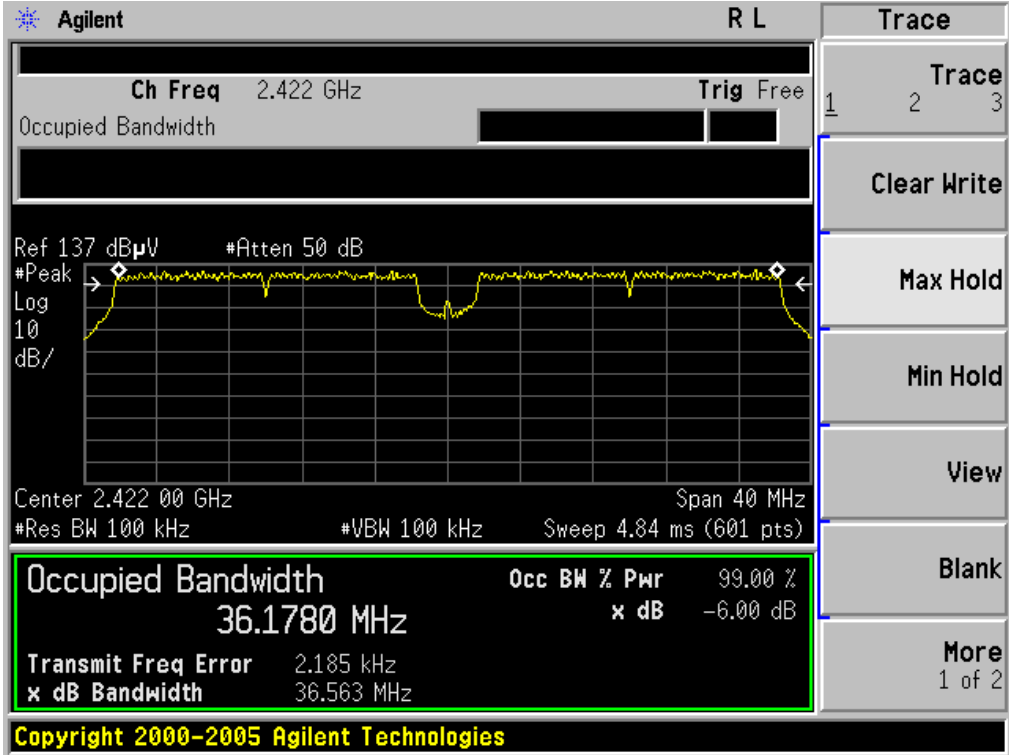

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

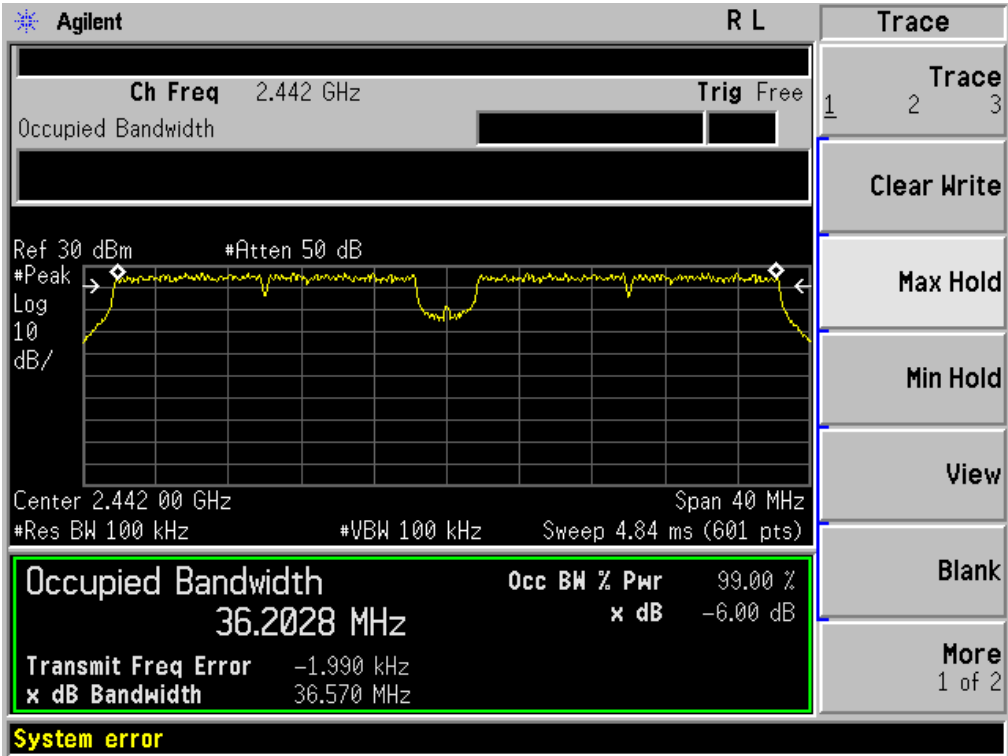

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

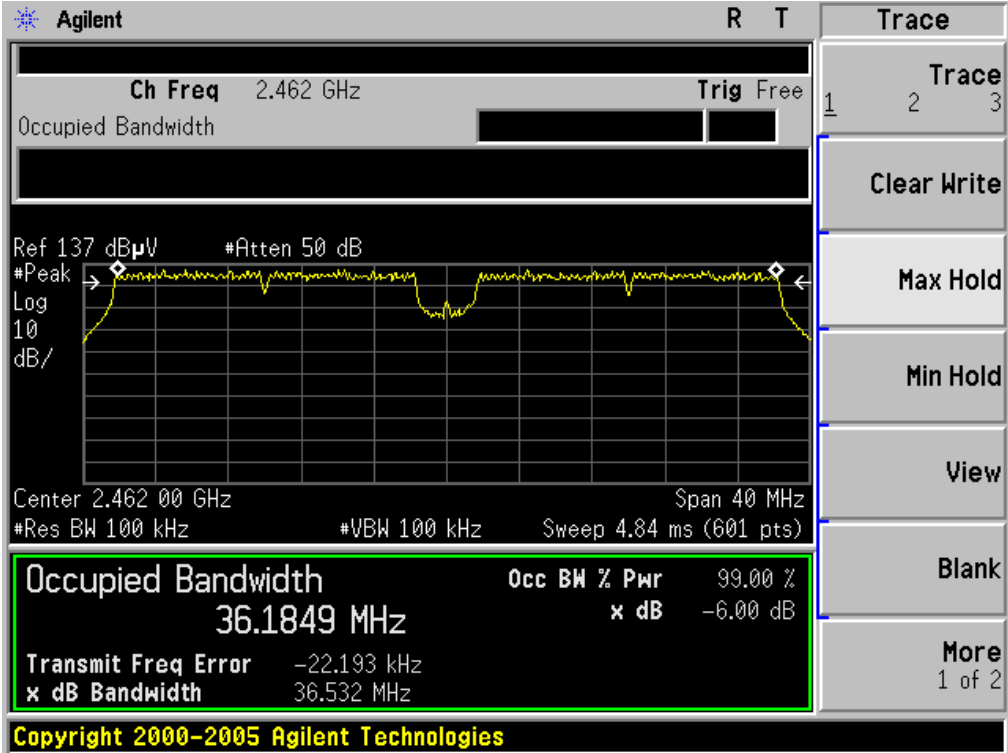

7. CONDUCTED SPURIOUS EMISSION

7.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements. Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 6.2



7.3 MEASUREMENT EQUIPMENT USED


The same as described in section 6.3

7.4 LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT		
Applicable Limits	Measurement Result	
	Test Data	Criteria
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS
In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS

TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE
OF 802.11b FOR MODULATION

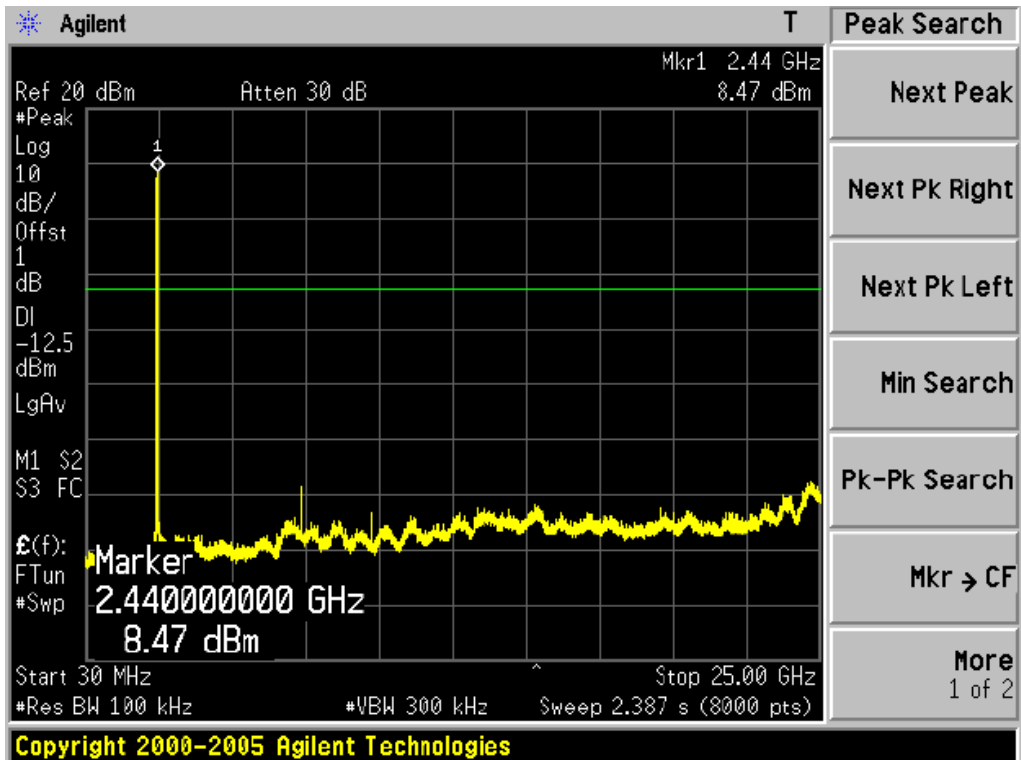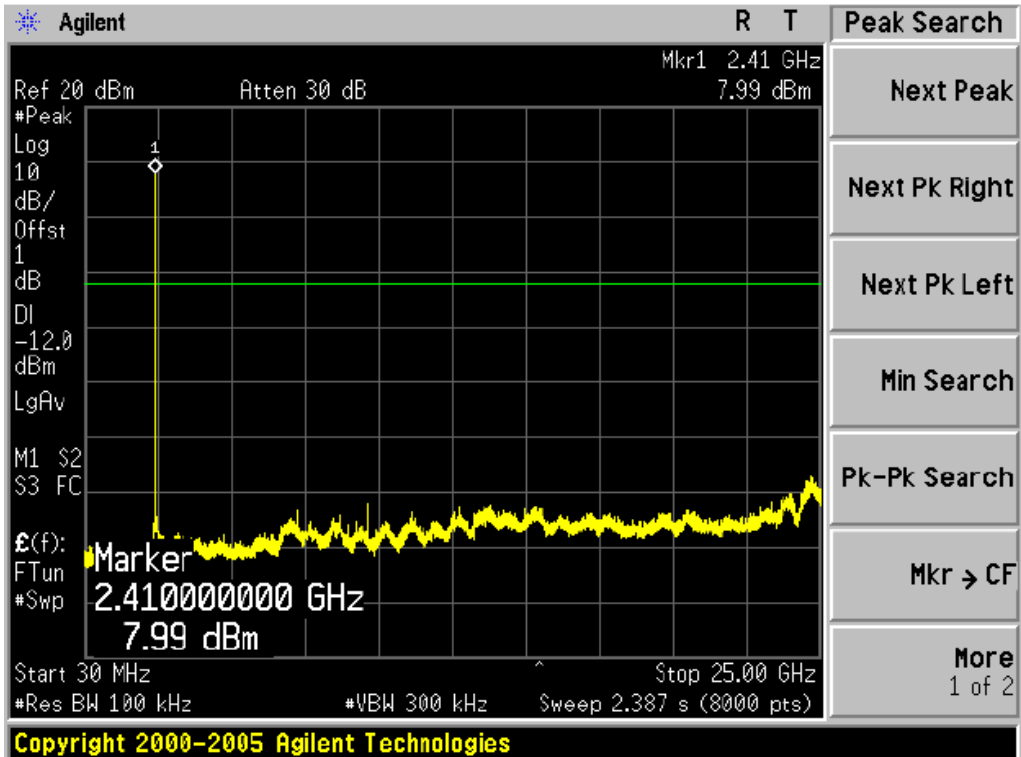

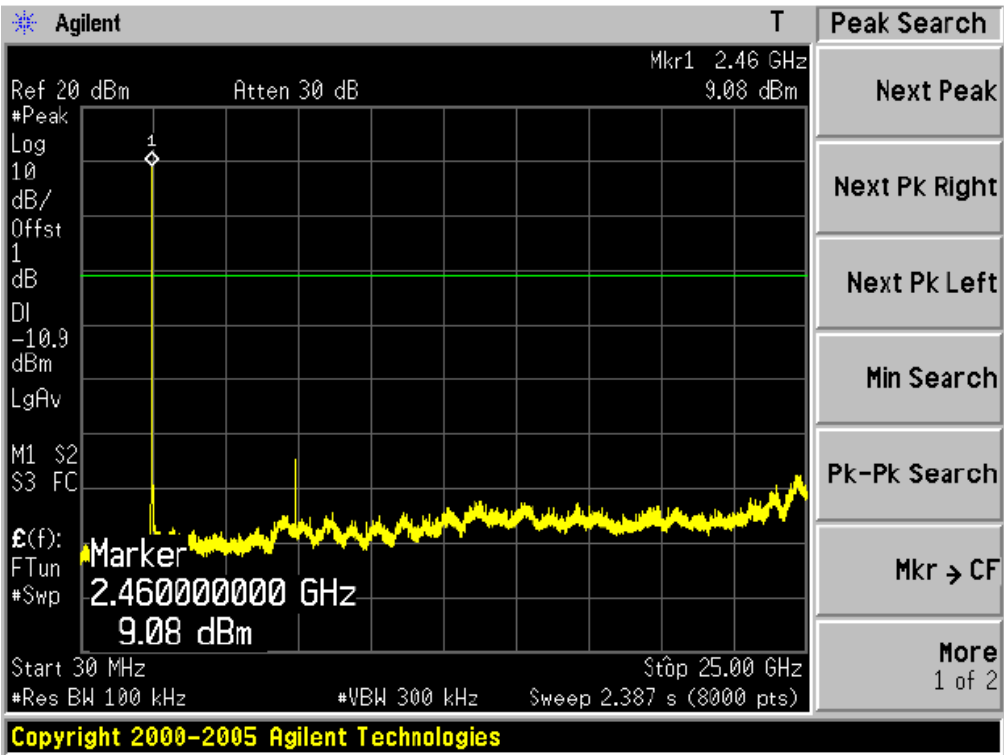

8. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

8.1 MEASUREMENT PROCEDURE

- (1). The EUT was placed on a turn table which is 0.8m above ground plane.
- (2). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (3). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (4). Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements. Set RBW= 100 kHz, VBW $\geq$ 300KHz, SPAN to 5-30 % greater than the EBW, Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where BWCF = 10log (3 kHz/100kHz = -15.2 dB).

8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer To Section 6.2

8.3 MEASUREMENT EQUIPMENT USED

Refer To Section 6.3

8.4 LIMITS AND MEASUREMENT RESULT

TEST ITEM	POWER PECTRAL DENSITY
TEST MODE	802.11b with data rate 1

Channel No.	Reading Value (dBm)	BWCF (dB)	PSD (dBm)	Limit (dBm)	Result
Low Channel	7.71	-15.2	-7.49	8	Pass
Middle Channel	8.84	-15.2	-6.36	8	Pass
High Channel	9.58	-15.2	-5.62	8	Pass

TEST ITEM	POWER PECTRAL DENSITY
TEST MODE	802.11g with data rate 6

Channel No.	Reading Value (dBm)	BWCF (dB)	PSD (dBm)	Limit (dBm)	Result
Low Channel	0.07	-15.2	-15.13	8	Pass
Middle Channel	1.80	-15.2	-13.40	8	Pass
High Channel	3.01	-15.2	-12.19	8	Pass


TEST ITEM	POWER PECTRAL DENSITY
TEST MODE	802.11n 20 with data rate 6.5

Channel No.	Reading Value (dBm)	BWCF (dB)	PSD (dBm)	Limit (dBm)	Result
Low Channel	0.41	-15.2	-14.79	8	Pass
Middle Channel	1.74	-15.2	-13.46	8	Pass
High Channel	2.49	-15.2	-12.71	8	Pass


TEST ITEM	POWER PECTRAL DENSITY
TEST MODE	802.11n 40 with data rate 13.5

Channel No.	Reading Value (dBm)	BWCF (dB)	PSD (dBm)	Limit (dBm)	Result
Low Channel	-4.45	-15.2	-19.65	8	Pass
Middle Channel	-3.36	-15.2	-18.56	8	Pass
High Channel	-2.81	-15.2	-18.01	8	Pass


802.11b TEST RESULT
TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

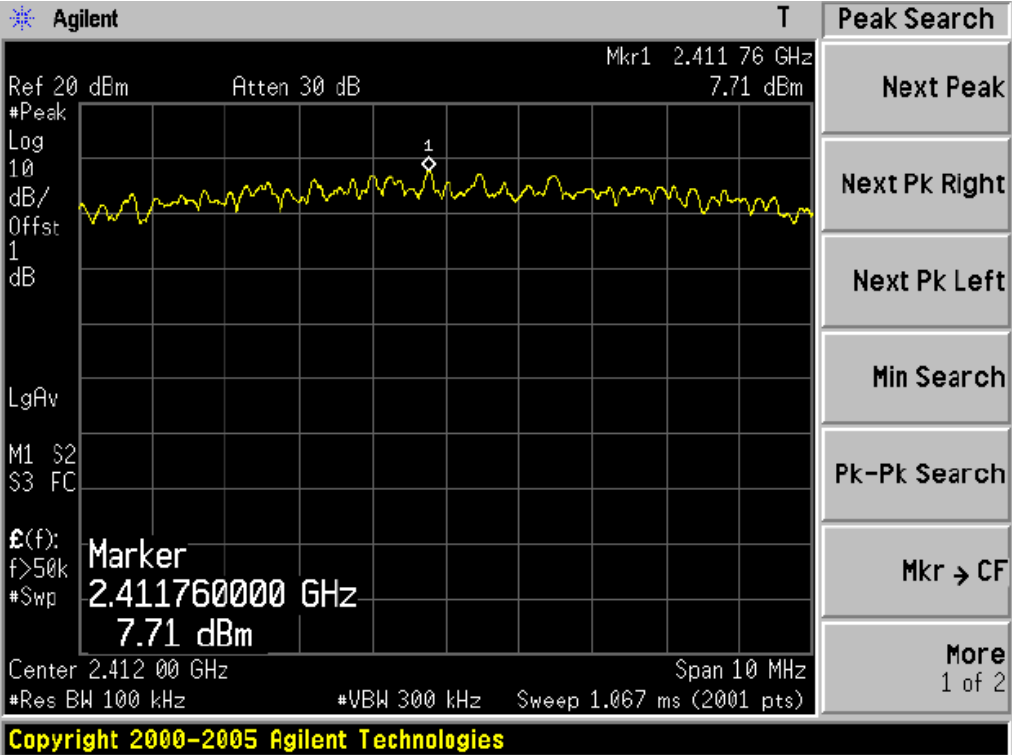

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

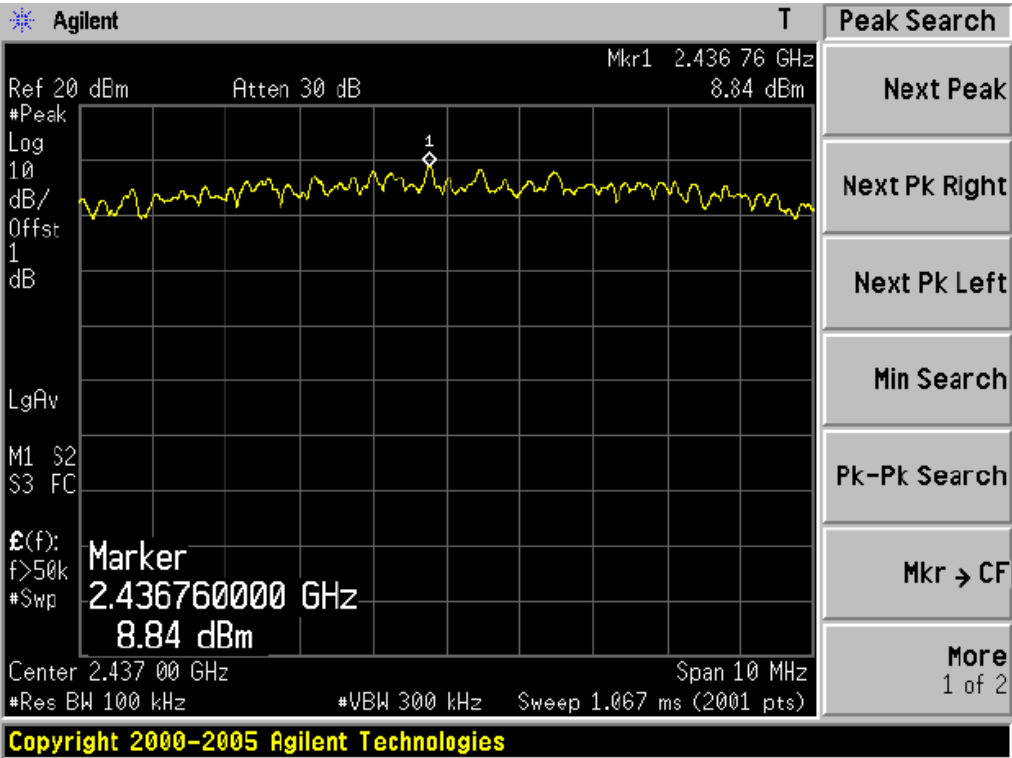


TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

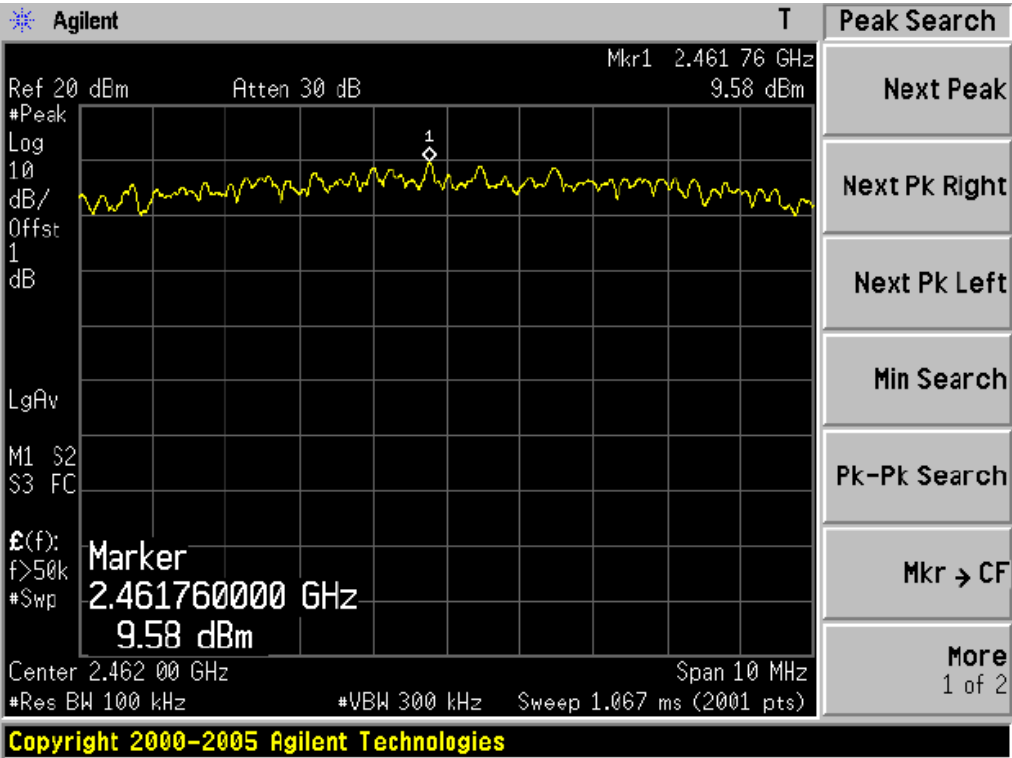


802.11g TEST RESULT


TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

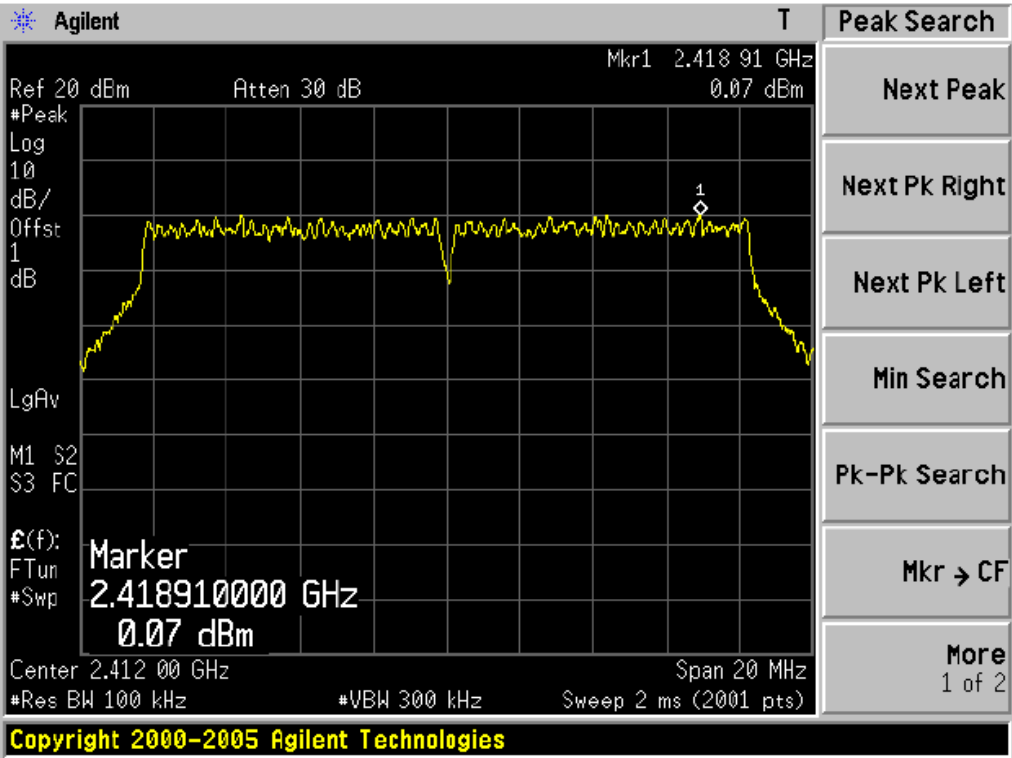

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

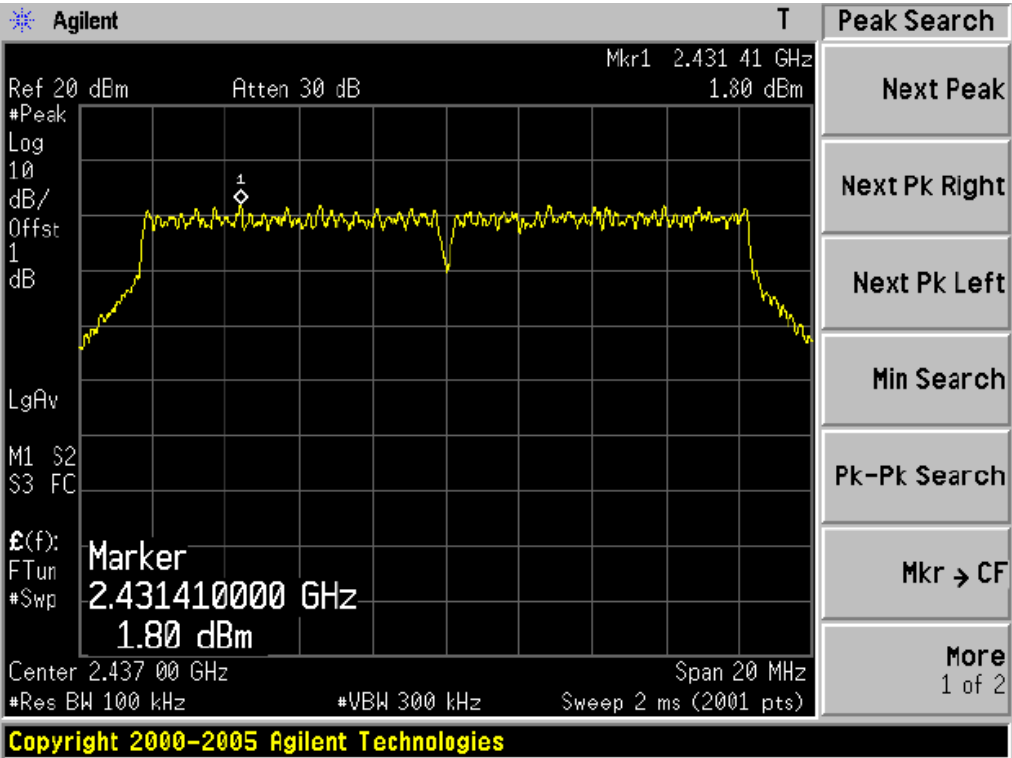


TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

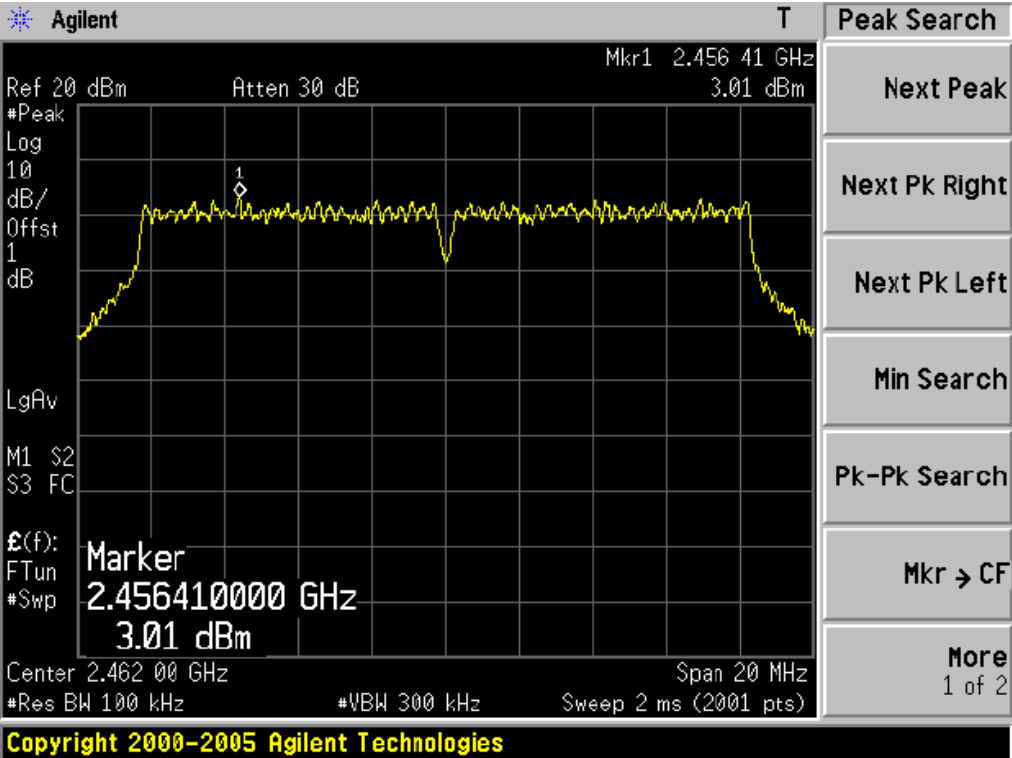


802.11n 20 TEST RESULT


TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

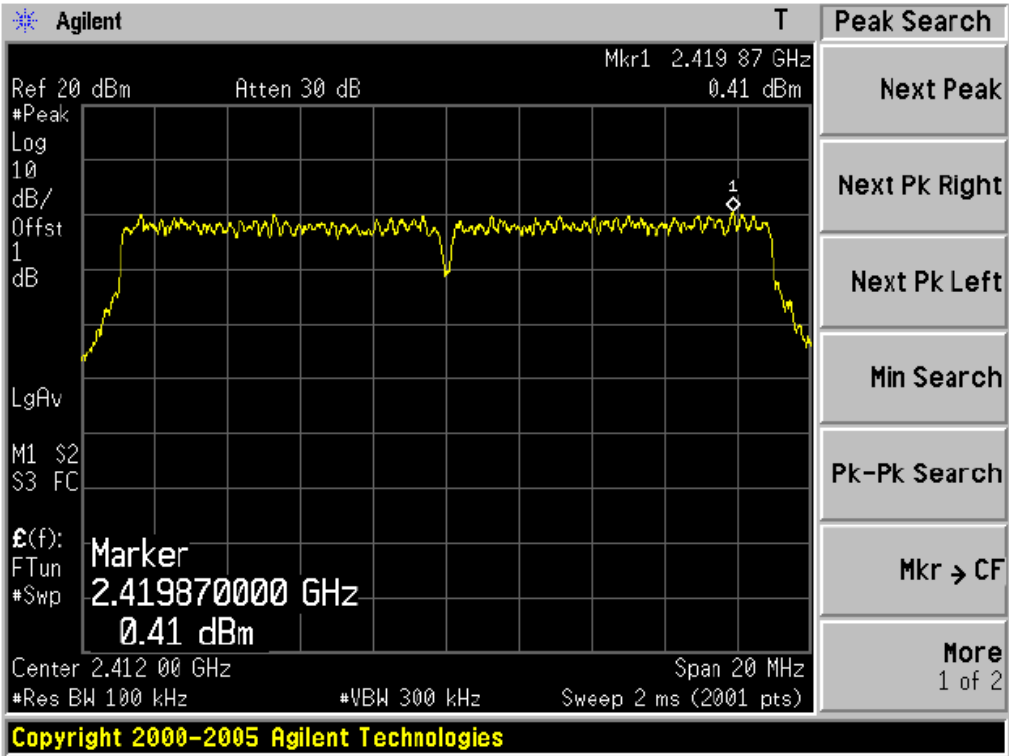

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

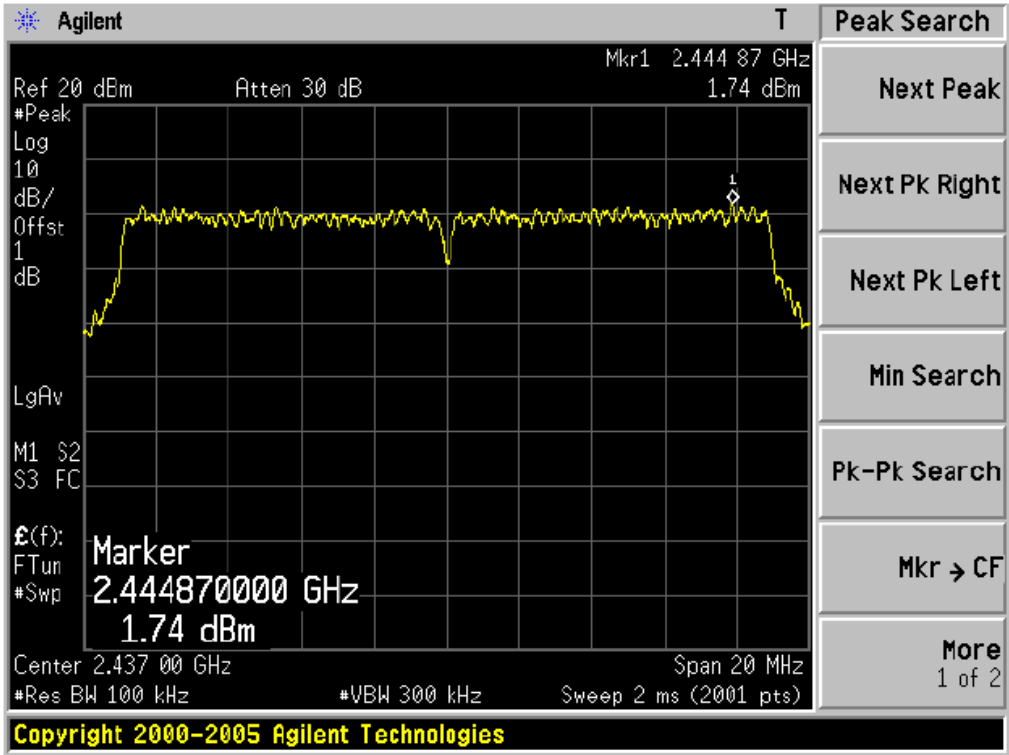


TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

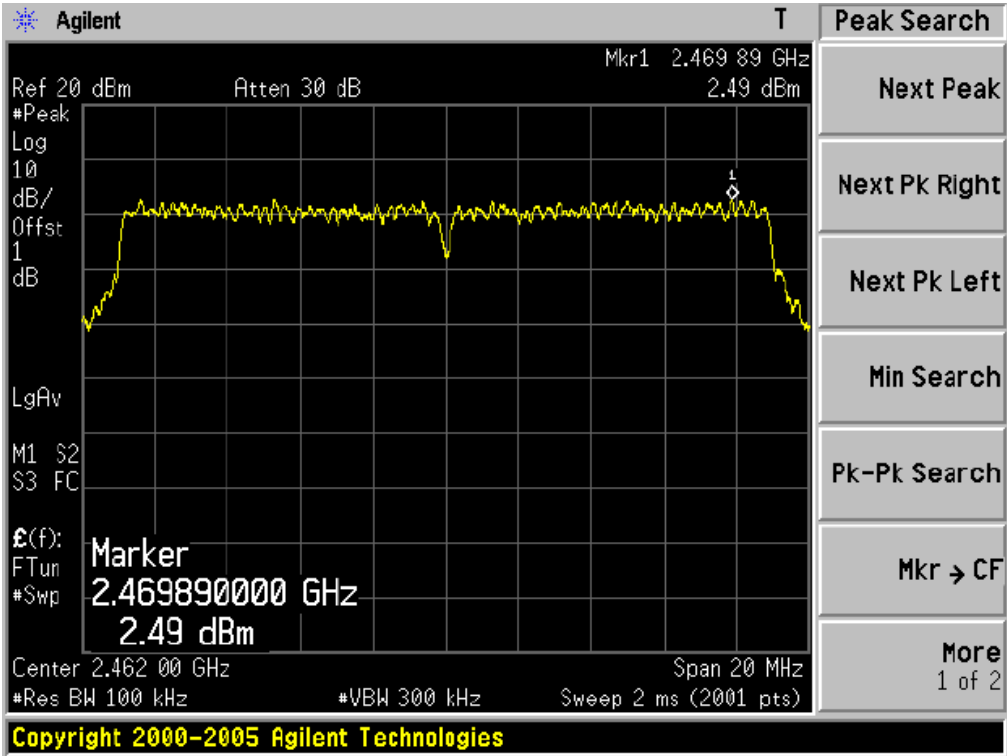


802.11n 40 TEST RESULT


TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

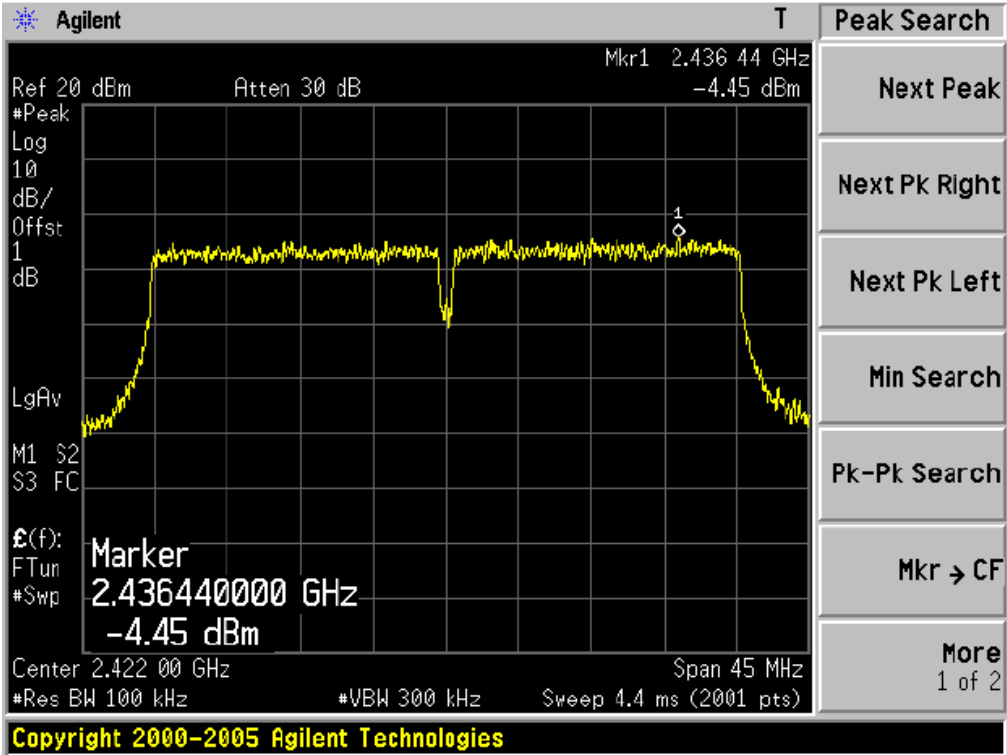

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

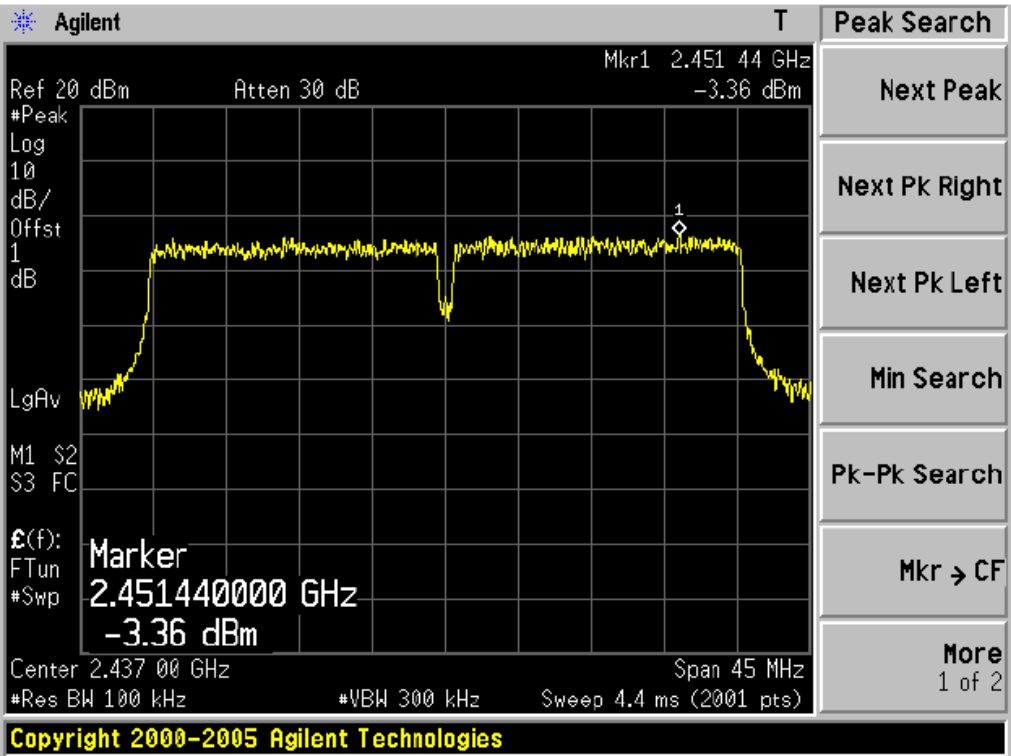

TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

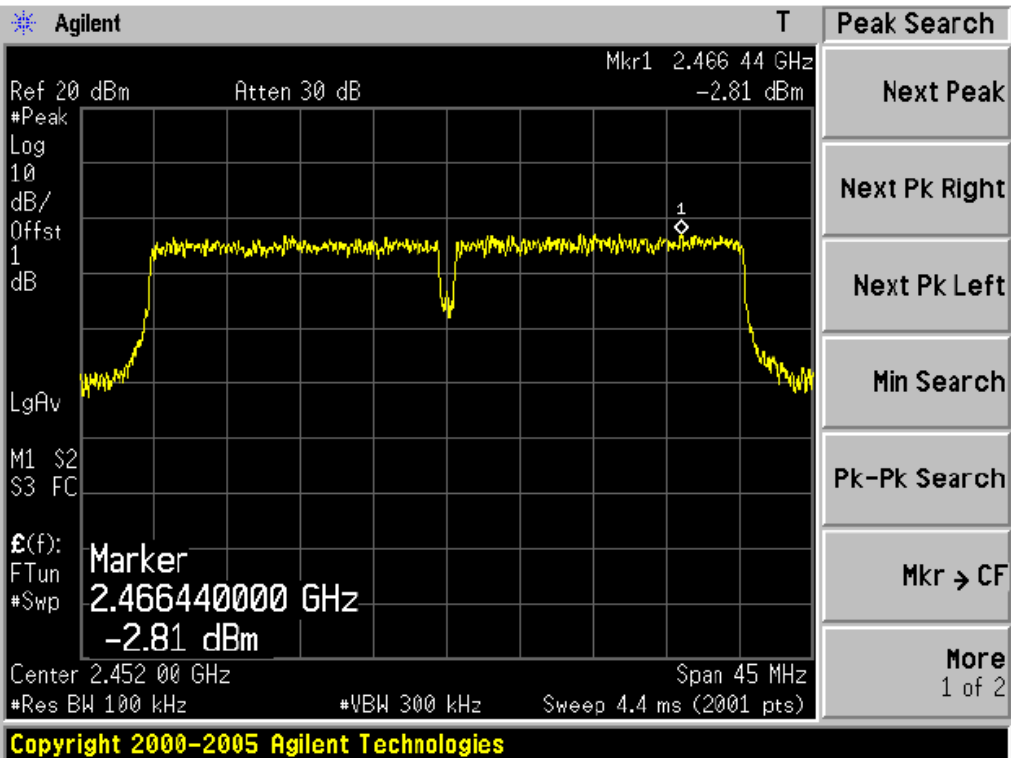


9. RADIATED EMISSION MEASUREMENT

9.1 MEASUREMENT PROCEDURE


- 1 Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 Meter above ground. The phase center of the receiving antenna mounted on the top of a height-Variable antenna tower was placed 3 meters far away from the turntable.
- 2 Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine The position of the highest radiation.
- 3 The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4 For each suspected emissions, the antenna tower was scan(from 1M to 4M)and then the turntable was Rotated(from 0 degree to 360degrees) to find the maximum reading.
- 5 Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode
- 6 For emission above 1GHZ, use 1MHZ VBW and RBW for peak reading. Then 1MHZ RBW and 10Hz VBW For average reading in spectrum analyzer.
- 7 When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one Complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative(provided the transmitter operates for longer than 0.1 seconds) or in cases where the Pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 seconds interval during which the field strength is at its maximum value.
- 8 If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9 For testing above 1GHZ,the emissions level of the EUT in peak mode was lower than average limit(that Means the emissions level in peak mode also complies with the limit in average mode)then testing will be Stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average Mode again and reported.
- 10 in case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded Data should be QP measured by receiver. High-Low scan is not required in this case.

9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


RADIATED EMISSION TEST SETUP BELOW 30MHz

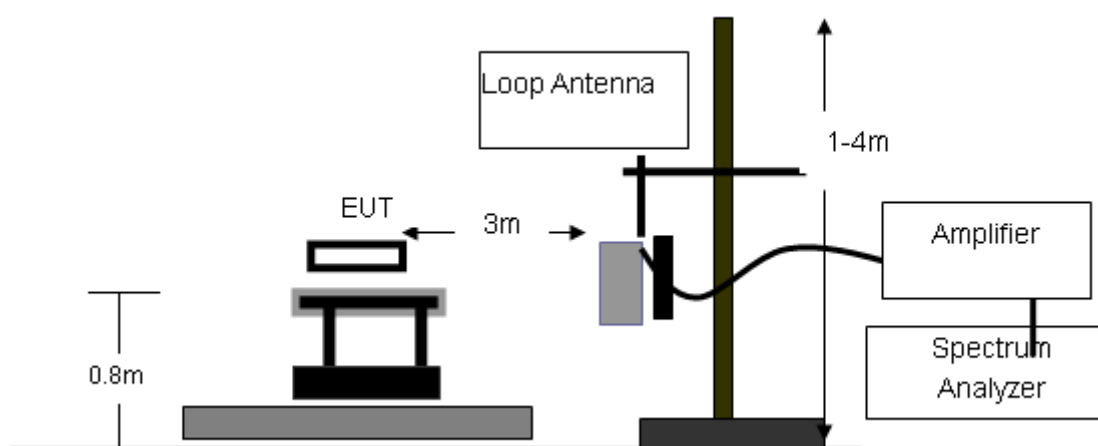

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

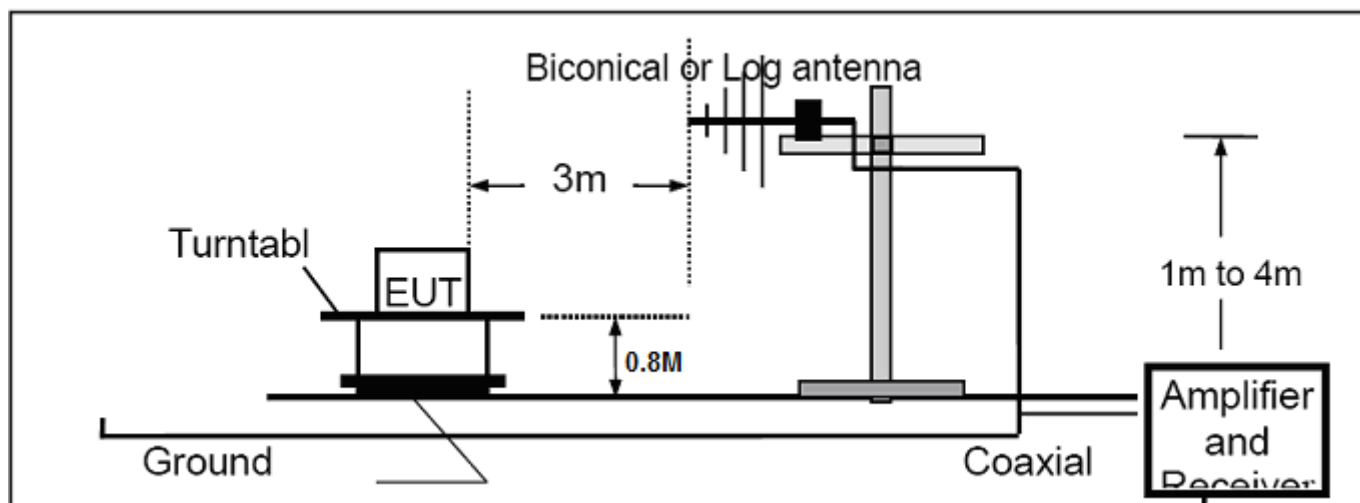

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

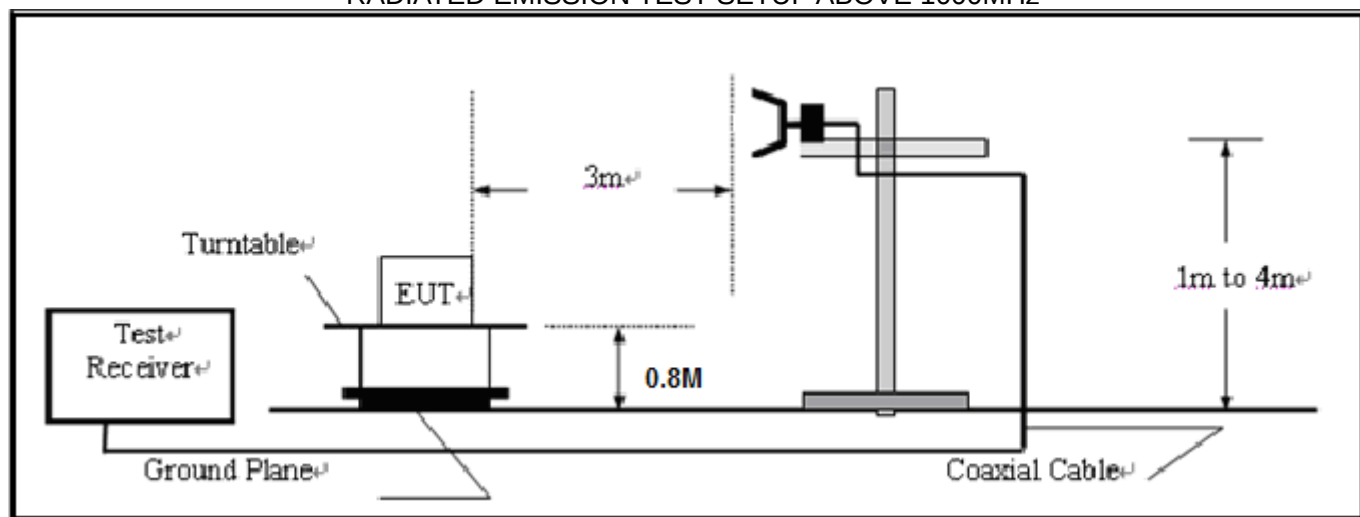

9.3 MEASUREMENT EQUIPMENT USED

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	07/18/2012	07/17/2013
Amplifier	EM	EM30180	0607030	07/18/2012	07/17/2013
Horn Antenna	EM	EM-AH-10180	N/A	07/18/2012	07/17/2013
Horn Antenna	A.H. Systems Inc.	SAS-574	--	07/18/2012	07/17/2013
EMI Test Receiver	Rohde & Schwarz	ESCI	N/A	07/18/2012	07/17/2013
Amplifier	EM	EM30180	N/A	07/18/2012	07/17/2013
Biological Antenna	A.H. Systems Inc.	SAS-521-4	N/A	07/18/2012	07/17/2013
Loop Antenna	A.H.	SAS-526B	264	07/18/2012	07/17/2013
Isolation Transformer	LETEAC	LTBK	--	07/18/2012	07/17/2013

9.4 LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed


Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested For restricted band radiated emission,
the test records reported below are the worst result compared to other modes.

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequency to 30MHz.

RADIATED EMISSION BELOW 1GHZ

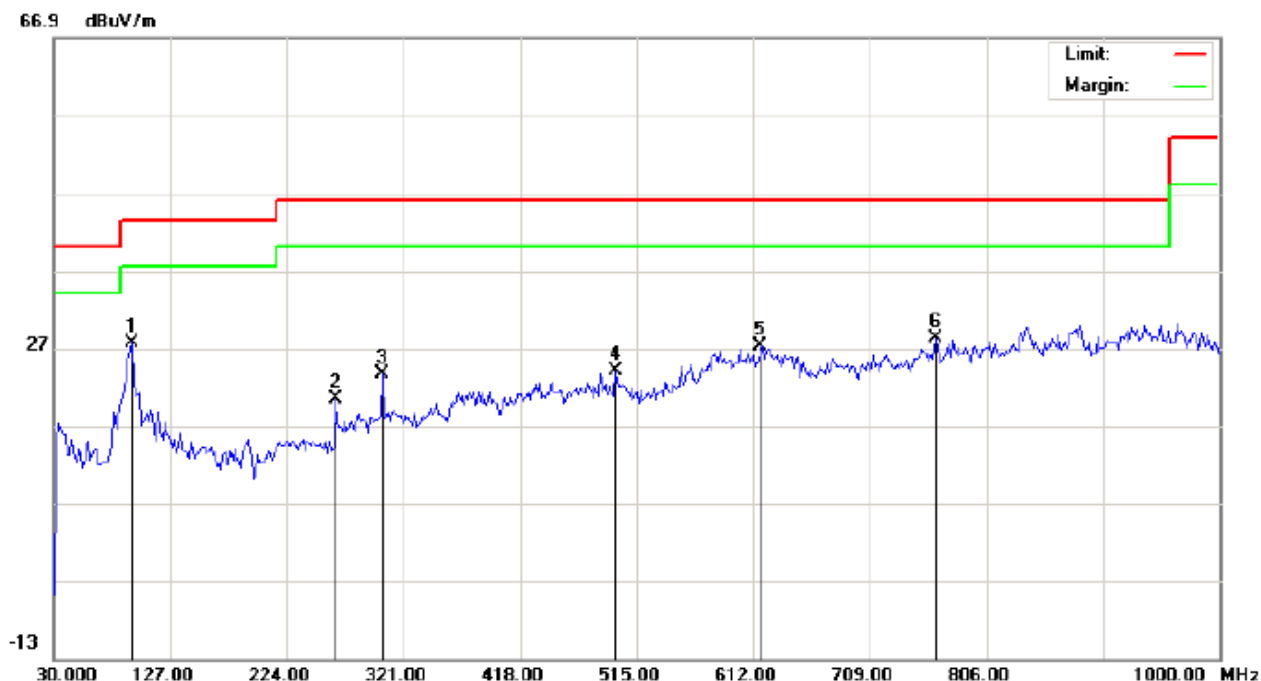

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: 11n Wireless USB Module

M/N: HT-WM11M

Mode: Mode 1

Note:

Polarization: *Horizontal*


Power:

Distance: 3m

Temperature: 26

Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	94.6667	12.55	15.06	27.61	43.50	-15.89	peak			
2		264.4166	5.76	14.71	20.47	46.00	-25.53	peak			
3		303.2167	6.43	17.21	23.64	46.00	-22.36	peak			
4		497.2167	1.26	22.78	24.04	46.00	-21.96	peak			
5		618.4664	2.10	25.05	27.15	46.00	-18.85	peak			
6		763.9664	0.52	27.66	28.18	46.00	-17.82	peak			

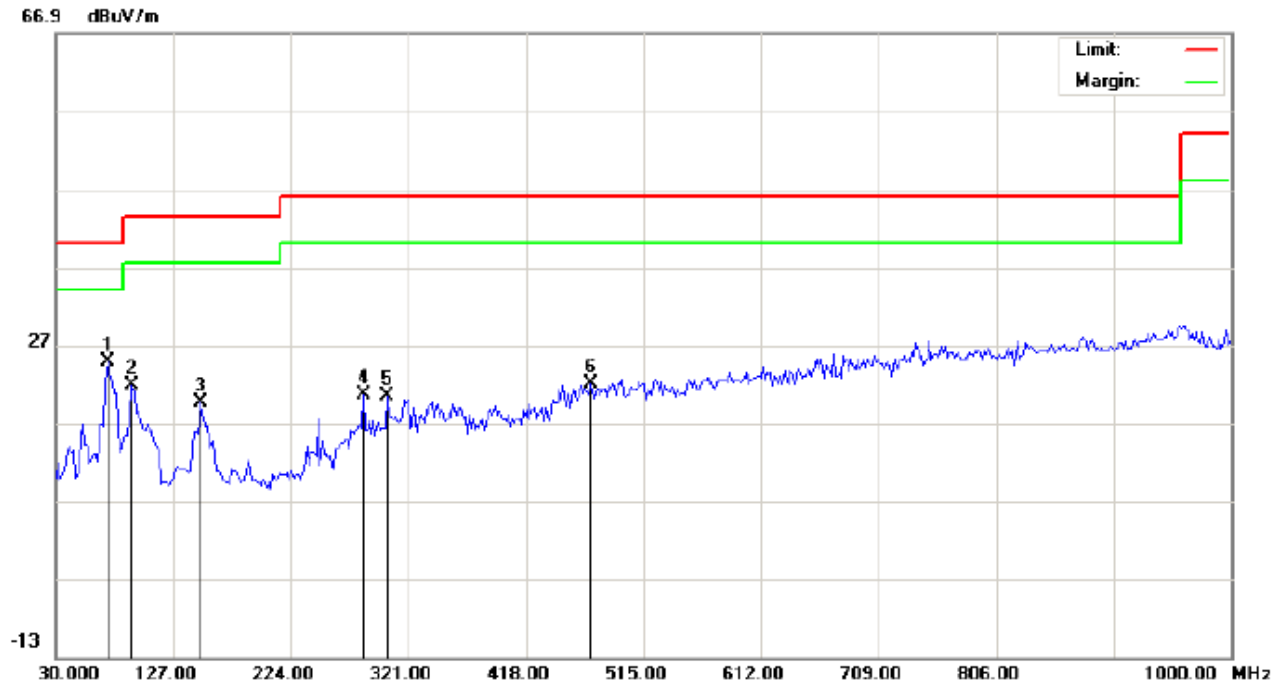


Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation Power: Humidity: 60 %
EUT: 11n Wireless USB Module Distance: 3m
M/N: HT-WM11M
Mode: Mode 1
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	73.6500	19.48	5.35	24.83	40.00	-15.17	peak			
2		93.0497	15.32	6.52	21.84	43.50	-21.66	peak			
3		149.6331	0.62	18.89	19.51	43.50	-23.99	peak			
4		283.8167	3.43	17.16	20.59	46.00	-25.41	peak			
5		303.2167	3.27	17.21	20.48	46.00	-25.52	peak			
6		471.3500	0.44	21.61	22.05	46.00	-23.95	peak			


Note: Measurement= Reading + Factor, Over=Measure-Limit.

RADIATED EMISSION ABOVE 1GHZ

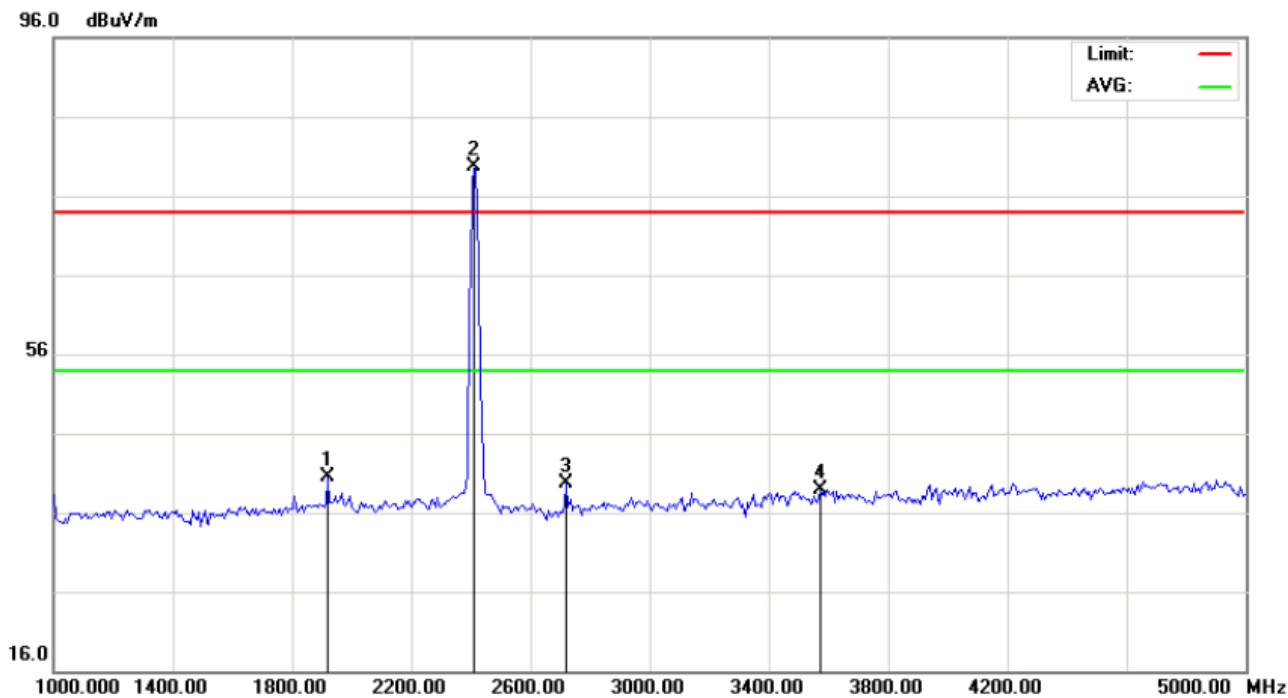

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)	Power:	Humidity: 60 %
EUT: 11n Wireless USB Module	Distance: 3m	
M/N: HT-WM11M		
Mode: 802.11b-Low TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1920.000	31.42	9.04	40.46	74.00	-33.54	peak			
2	*	2413.333	69.33	10.33	79.66	74.00	5.66	peak			
3		2720.000	28.70	10.96	39.66	74.00	-34.34	peak			
4		3573.333	26.32	12.56	38.88	74.00	-35.12	peak			

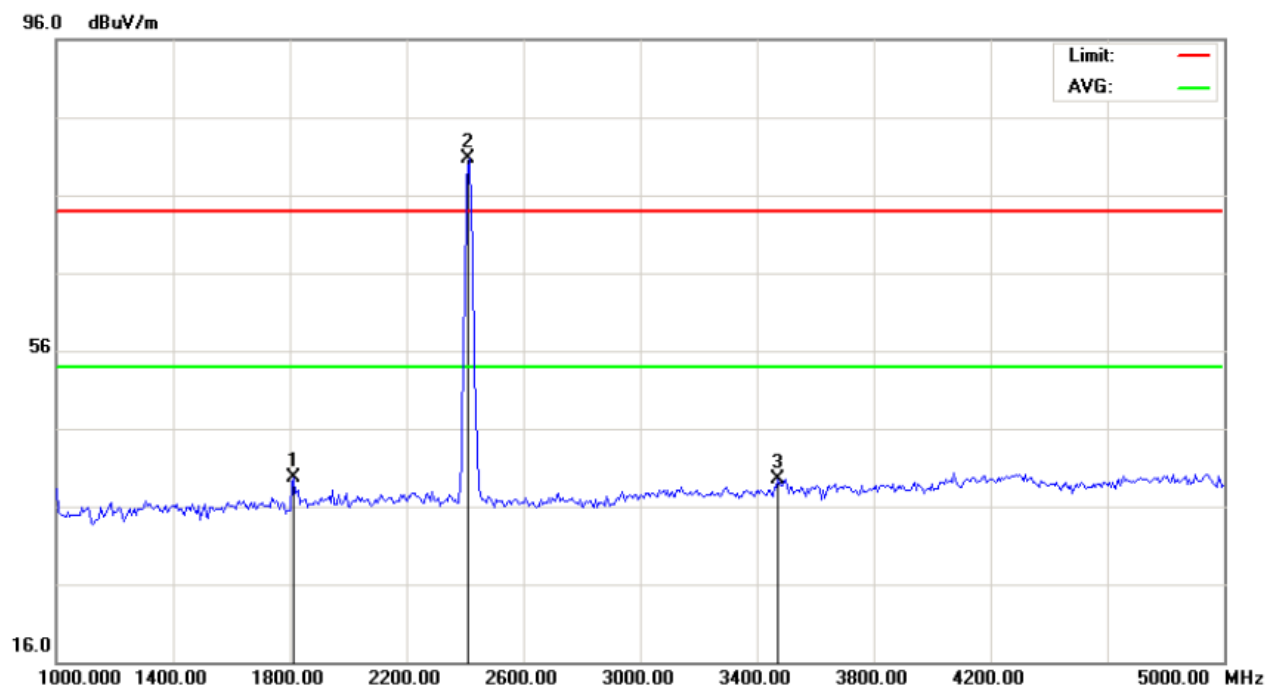

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: 11n Wireless USB Module Distance: 3m
M/N: HT-WM11M
Mode: 802.11b-Low TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1813.333	31.75	7.92	39.67	74.00	-34.33	peak			
2	*	2413.333	70.33	10.33	80.66	74.00	6.66	peak			
3		3473.333	27.45	12.08	39.53	74.00	-34.47	peak			

Note: The other modes radiation emissions have more than 20dB margin.
Measurement= Reading + Factor, Over=Measure-Limit.
All modes radiation emission from 5GHz to 25GHz at least have 20dB margin.

10. BAND EDGE EMISSION


10.1 MEASUREMENT PROCEDURE

- 1, Set the EUT Work on the top, the bottom operation frequency individually.
2. Set SPA Start or Stop Frequency = Operation Frequency, RBW= 1MHz, VBW= 1MHz.
3. The band edges was measured and recorded.

10.2 TEST SET-UP


The Same as described in section 8.2

10.3 TEST RESULT

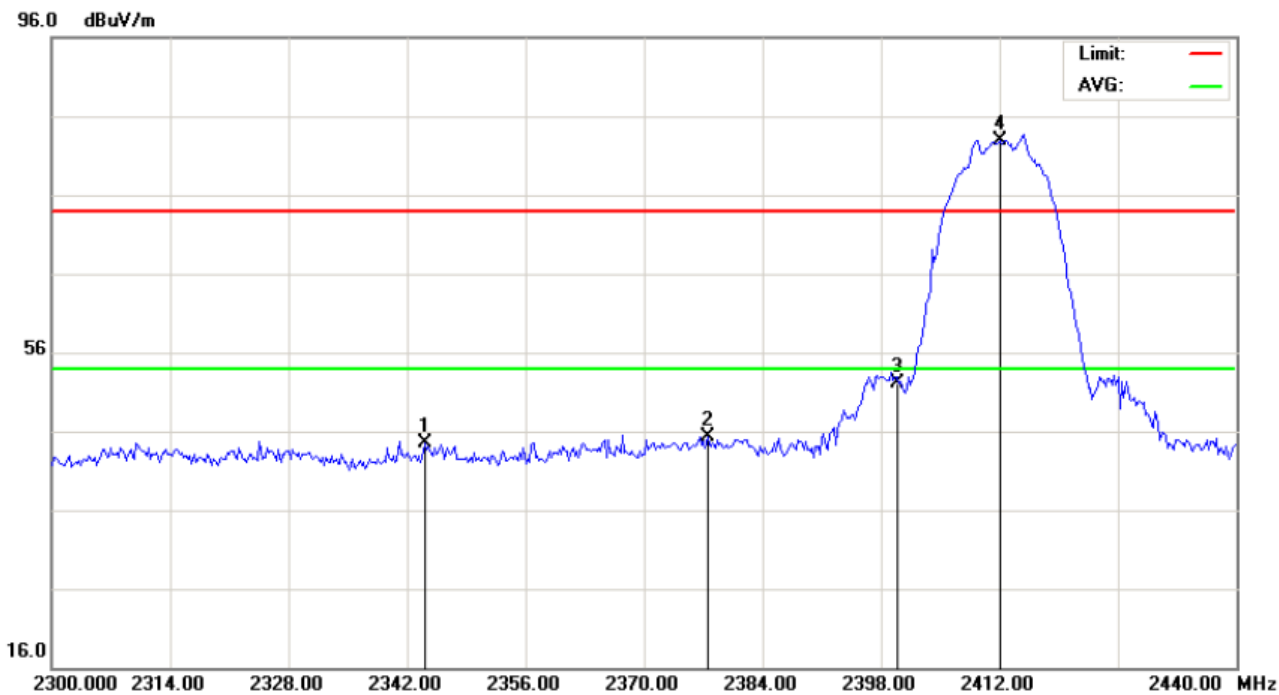

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)	Power:	Humidity: 60 %
EUT: 11n Wireless USB Module	Distance: 3m	
M/N: HT-WM11M		
Mode: 802.11b-Low TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2344.100	34.25	10.26	44.51	74.00	-29.49	peak			
2		2377.467	35.05	10.30	45.35	74.00	-28.65	peak			
3		2400.000	41.87	10.32	52.19	74.00	-21.81	peak			
4	*	2412.000	72.51	10.33	82.84	74.00	8.84	peak			

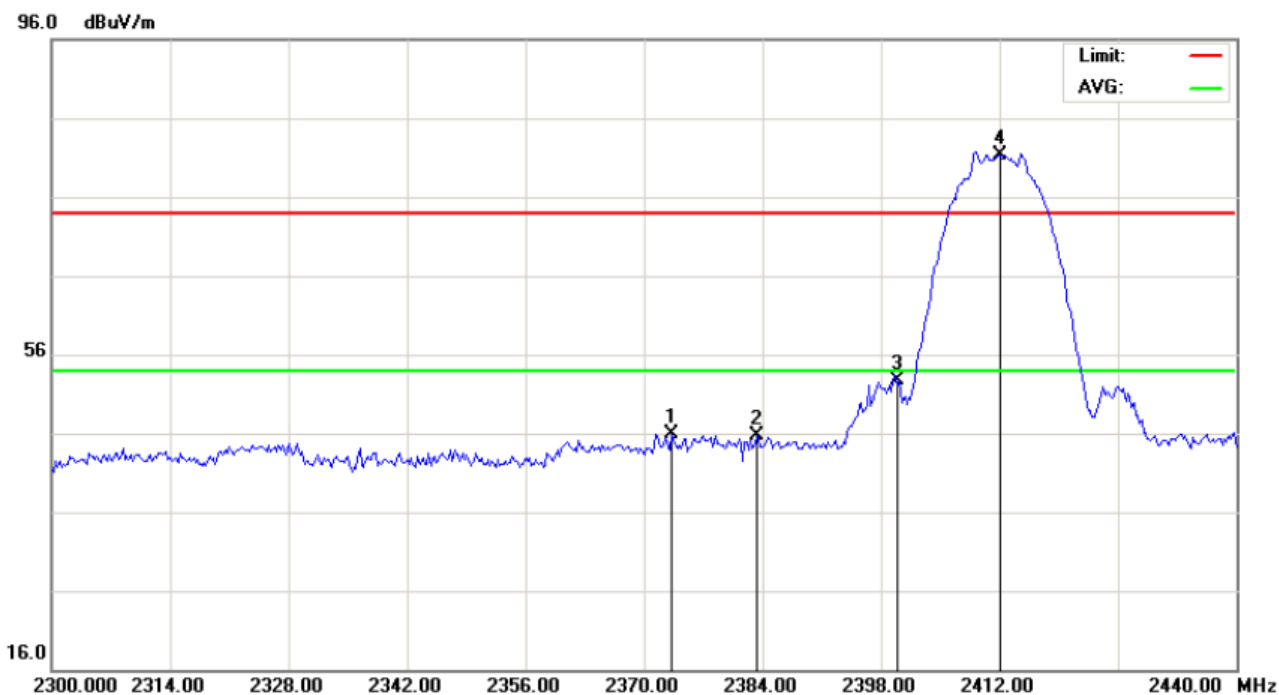


Site: site #1
Limit: FCC Class B 3M Radiation above 1GHZ(PK)
EUT: 11n Wireless USB Module
M/N: HT-WM11M
Mode: 802.11b-Low TX
Note:

Polarization: **Vertical**
Power:
Distance: 3m

Temperature: 26
Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2373.267	35.64	10.29	45.93	74.00	-28.07	peak			
2		2383.300	35.36	10.30	45.66	74.00	-28.34	peak			
3		2400.000	42.46	10.32	52.78	74.00	-21.22	peak			
4	*	2412.000	70.94	10.33	81.27	74.00	7.27	peak			

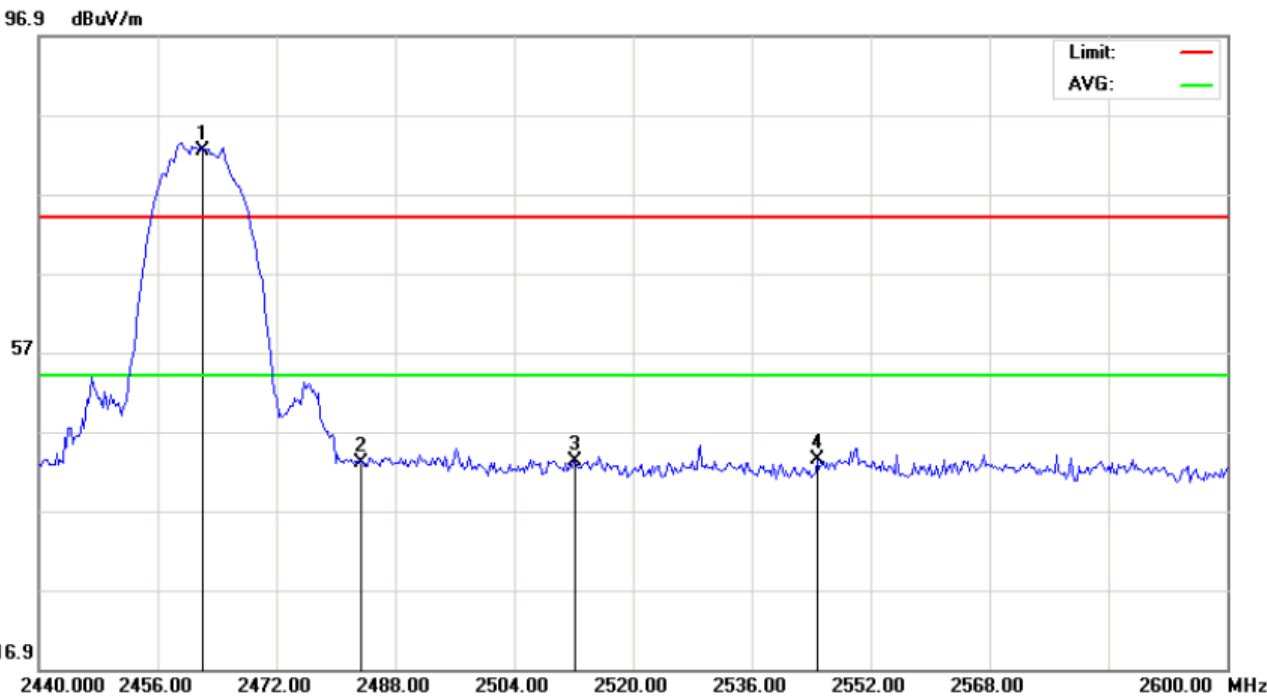

Site: site #1

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

EUT: 11n Wireless USB Module

M/N: HT-WM11M

Mode: 802.11b-High TX

Note:

Polarization: **Vertical**


Power:

Distance: 3m

Temperature: 26

Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2462.000	72.03	10.39	82.42	74.00	8.42	peak			
2		2483.500	32.56	10.41	42.97	74.00	-31.03	peak			
3		2512.267	32.80	10.46	43.26	74.00	-30.74	peak			
4		2544.800	32.95	10.54	43.49	74.00	-30.51	peak			

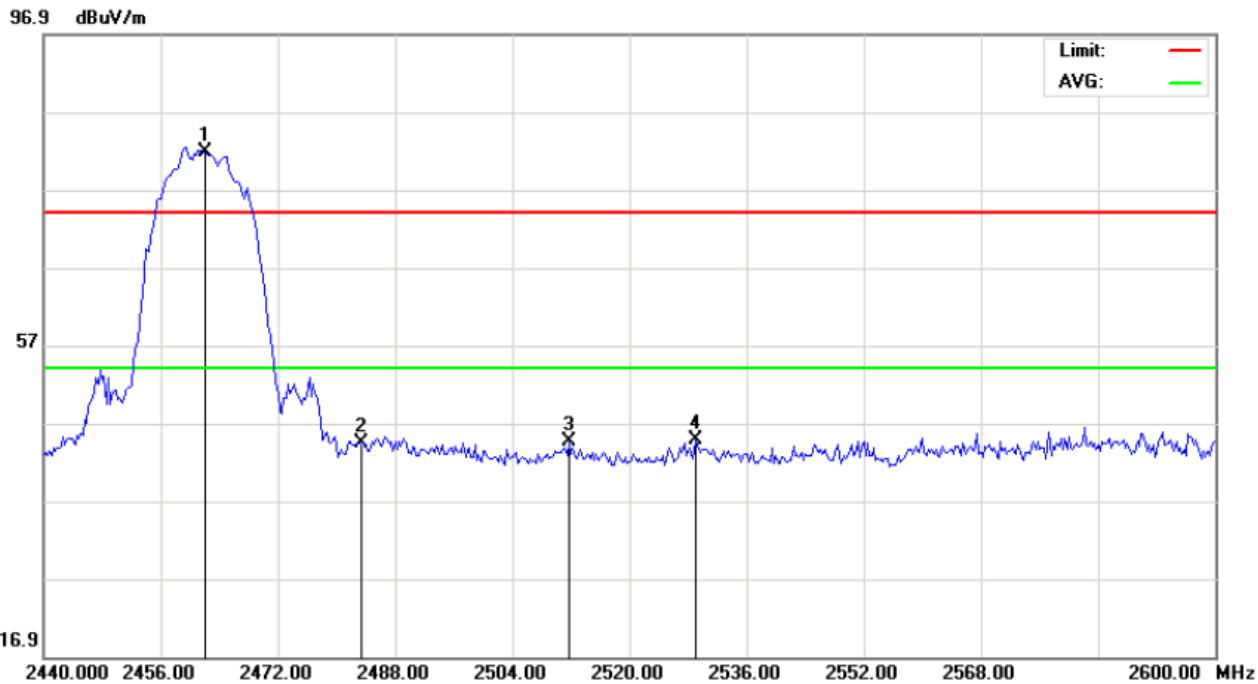

Site: site #1

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

EUT: 11n Wireless USB Module

M/N: HT-WM11M

Mode: 802.11b-High TX

Note:

Polarization: *Horizontal*


Power:

Distance: 3m

Temperature: 26

Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2462.000	71.44	10.39	81.83	74.00	7.83	peak			
2		2483.500	34.00	10.41	44.41	74.00	-29.59	peak			
3		2511.733	34.18	10.46	44.64	74.00	-29.36	peak			
4		2529.067	34.36	10.50	44.86	74.00	-29.14	peak			

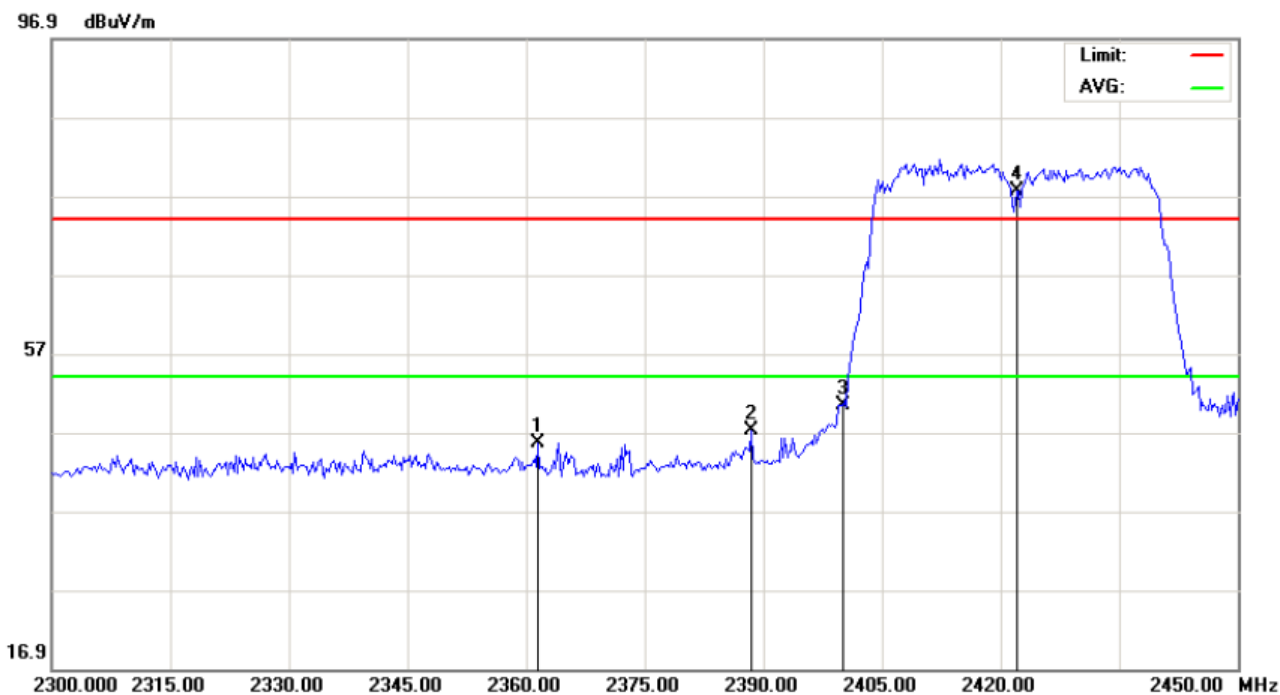

Site: site #1

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

EUT: 11n Wireless USB Module

M/N: HT-WM11M

Mode: 802.11n 40-Low TX

Note:

Polarization: **Horizontal**


Power:

Distance: 3m

Temperature: 26

Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2361.500	35.42	10.28	45.70	74.00	-28.30	peak			
2		2388.500	36.96	10.31	47.27	74.00	-26.73	peak			
3		2400.000	40.07	10.32	50.39	74.00	-23.61	peak			
4	*	2422.000	67.33	10.34	77.67	74.00	3.67	peak			

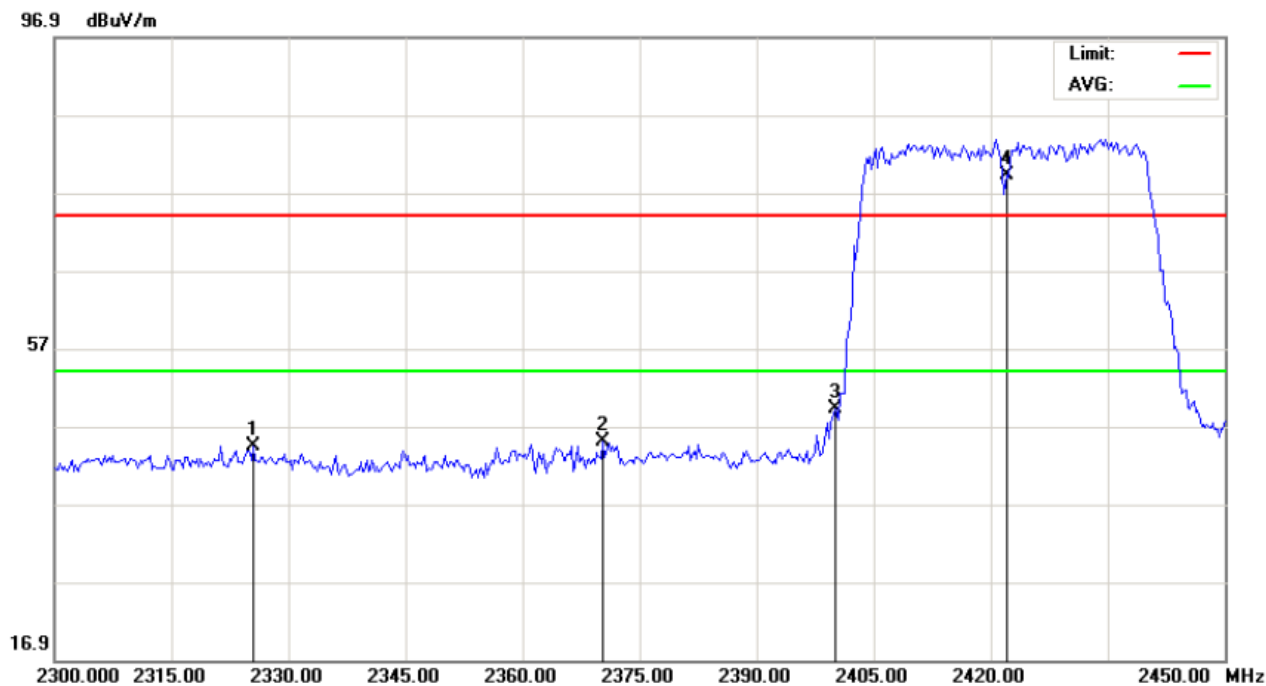


Site: site #1
Limit: FCC Class B 3M Radiation above 1GHZ(PK)
EUT: 11n Wireless USB Module
M/N: HT-WM11M
Mode: 802.11n 40-Low TX
Note:

Polarization: **Vertical**
Power:
Distance: 3m


Temperature: 26
Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2325.500	34.15	10.24	44.39	74.00	-29.61	peak			
2		2370.250	34.64	10.29	44.93	74.00	-29.07	peak			
3		2400.000	38.93	10.32	49.25	74.00	-24.75	peak			
4	*	2422.000	68.83	10.34	79.17	74.00	5.17	peak			

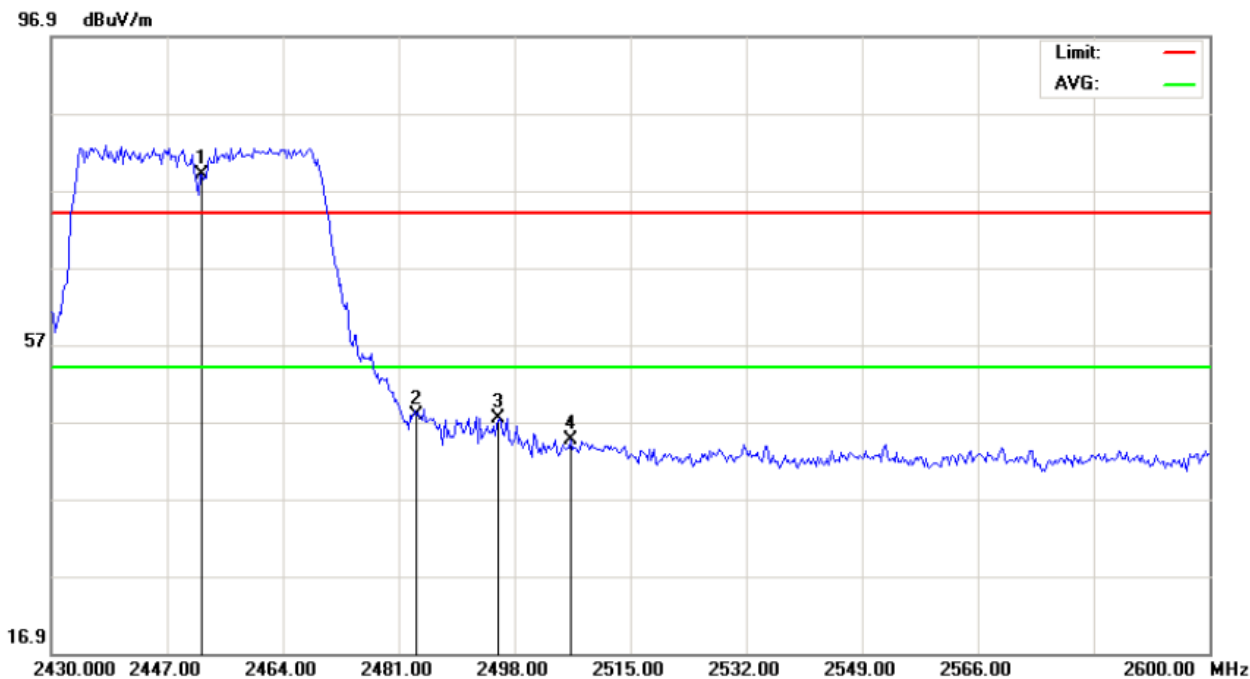


Site: site #1	Polarization: Vertical	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)	Power:	Humidity: 60 %
EUT: 11n Wireless USB Module	Distance: 3m	
M/N: HT-WM11M		
Mode: 802.11n 40-High TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2452.000	68.57	10.38	78.95	74.00	4.95	peak			
2		2483.500	37.37	10.41	47.78	74.00	-26.22	peak			
3		2495.733	36.96	10.43	47.39	74.00	-26.61	peak			
4		2506.217	34.08	10.44	44.52	74.00	-29.48	peak			

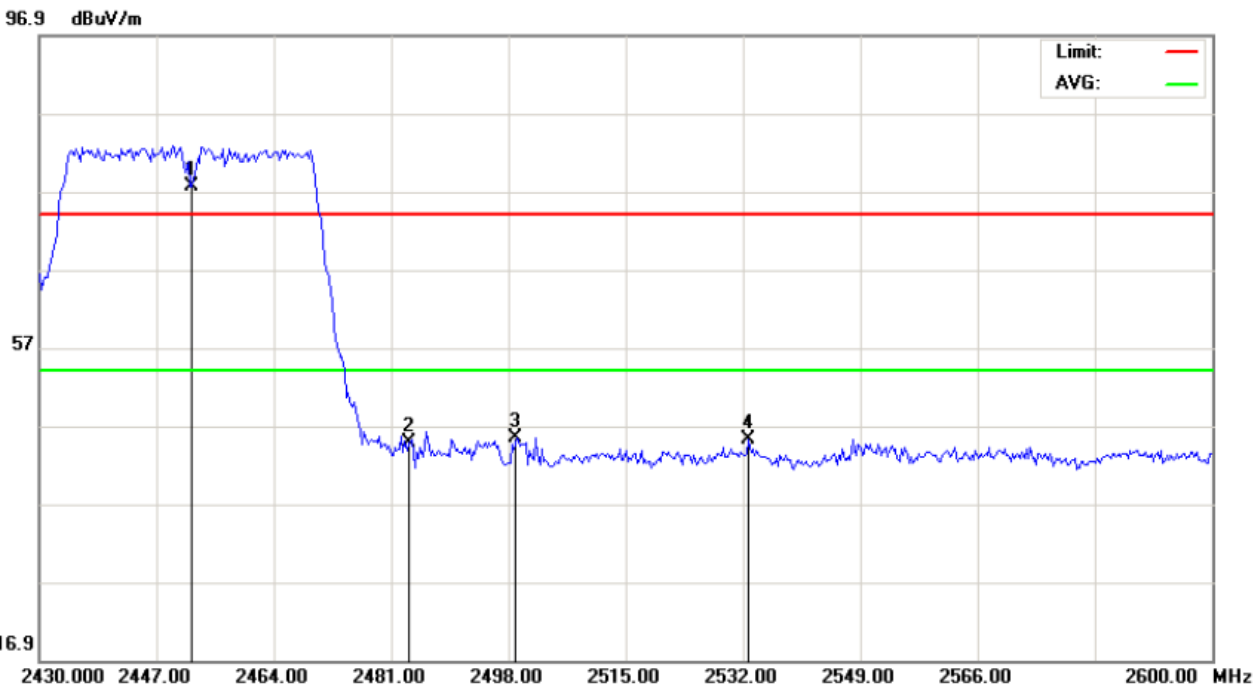

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)	Power:	Humidity: 60 %
EUT: 11n Wireless USB Module	Distance: 3m	
M/N: HT-WM11M		
Mode: 802.11n 40-High TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2452.000	67.17	10.38	77.55	74.00	3.55	peak			
2		2483.500	34.41	10.41	44.82	74.00	-29.18	peak			
3		2499.133	34.99	10.43	45.42	74.00	-28.58	peak			
4		2532.850	34.61	10.51	45.12	74.00	-28.88	peak			

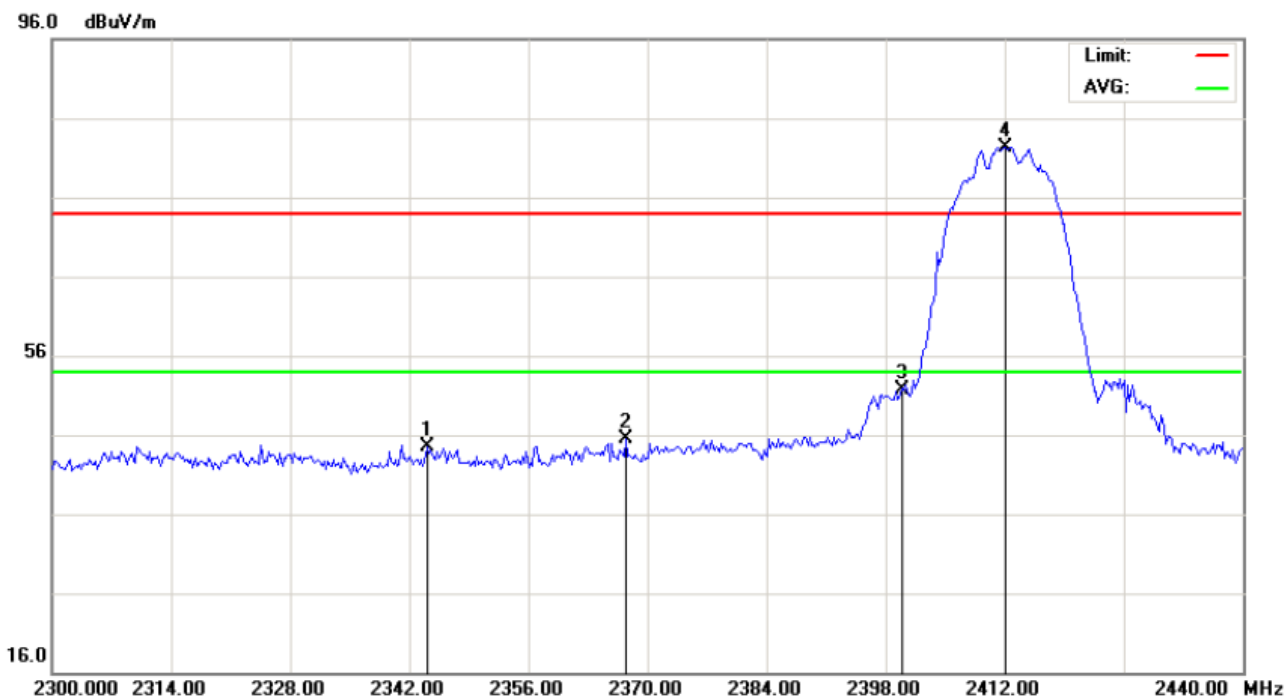

Site: site #1

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

EUT: 11n Wireless USB Module

M/N: HT-WM11M

Mode: 802.11b-Low Channel-TX

Note:

Polarization: *Horizontal*


Power:

Distance: 3m

Temperature: 26


Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2344.100	34.25	10.26	44.51	74.00	-29.49	peak			
2		2367.433	35.18	10.28	45.46	74.00	-28.54	peak			
3		2400.000	41.37	10.32	51.69	74.00	-22.31	peak			
4	*	2412.000	72.01	10.33	82.34	74.00	8.34	peak			

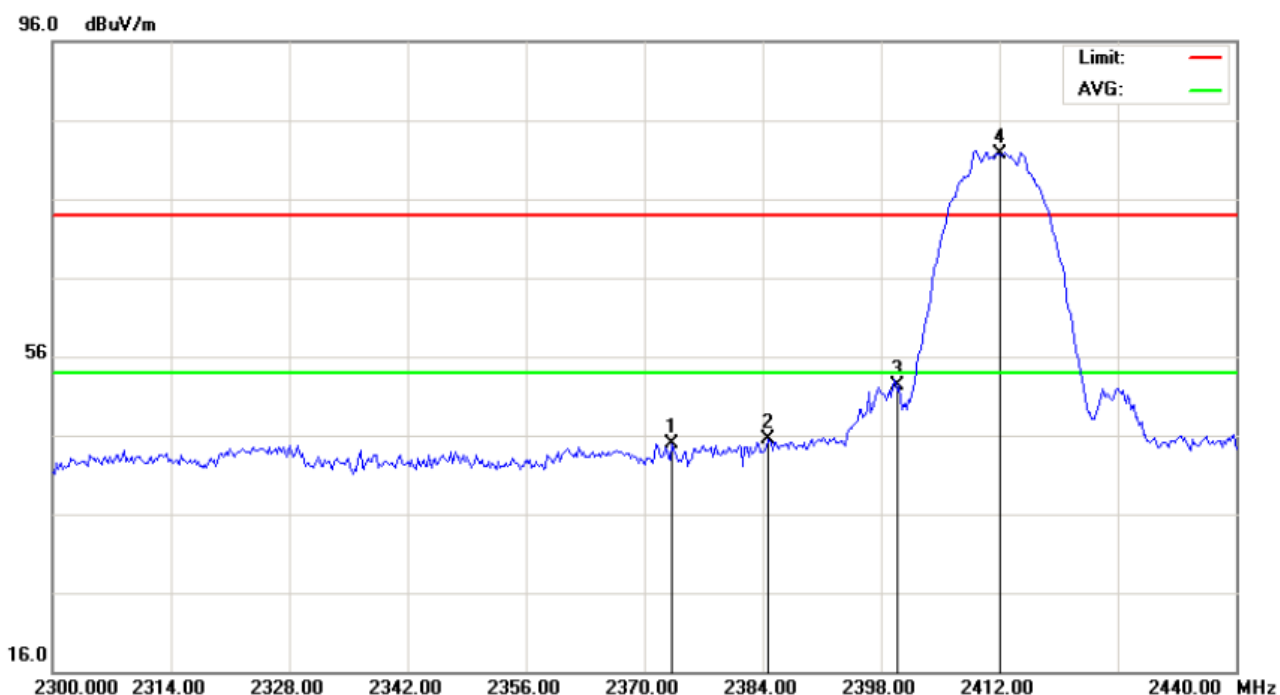

Site: site #1	Polarization: Vertical	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)	Power:	Humidity: 60 %
EUT: 11n Wireless USB Module	Distance: 3m	
M/N: HT-WM11M		
Mode: 802.11b-Low Channel-TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2373.267	34.64	10.29	44.93	74.00	-29.07	peak			
2		2384.700	35.30	10.30	45.60	74.00	-28.40	peak			
3		2400.000	41.96	10.32	52.28	74.00	-21.72	peak			
4	*	2412.000	71.44	10.33	81.77	74.00	7.77	peak			

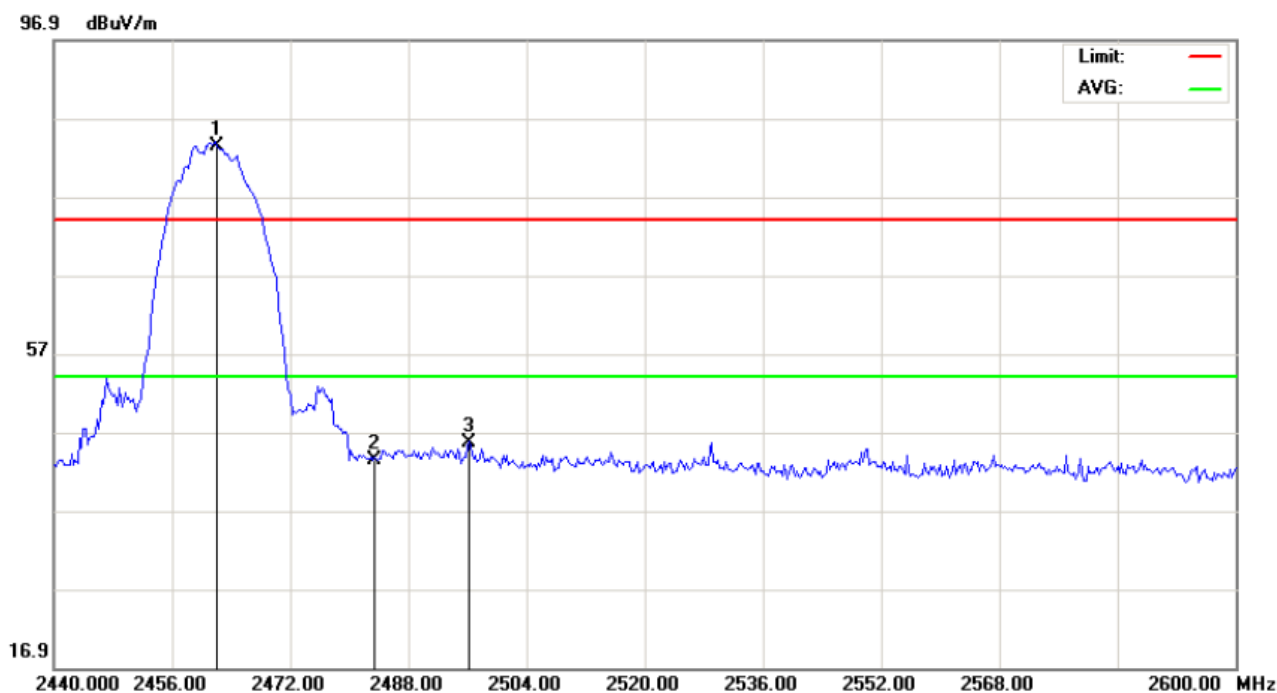

Site: site #1

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

EUT: 11n Wireless USB Module

M/N: HT-WM11M

Mode: 802.11b-High Channel-TX

Note:

Polarization: **Vertical**


Power:

Distance: 3m

Temperature: 26


Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2462.000	73.03	10.39	83.42	74.00	9.42	peak			
2		2483.500	33.06	10.41	43.47	74.00	-30.53	peak			
3		2496.267	35.27	10.43	45.70	74.00	-28.30	peak			

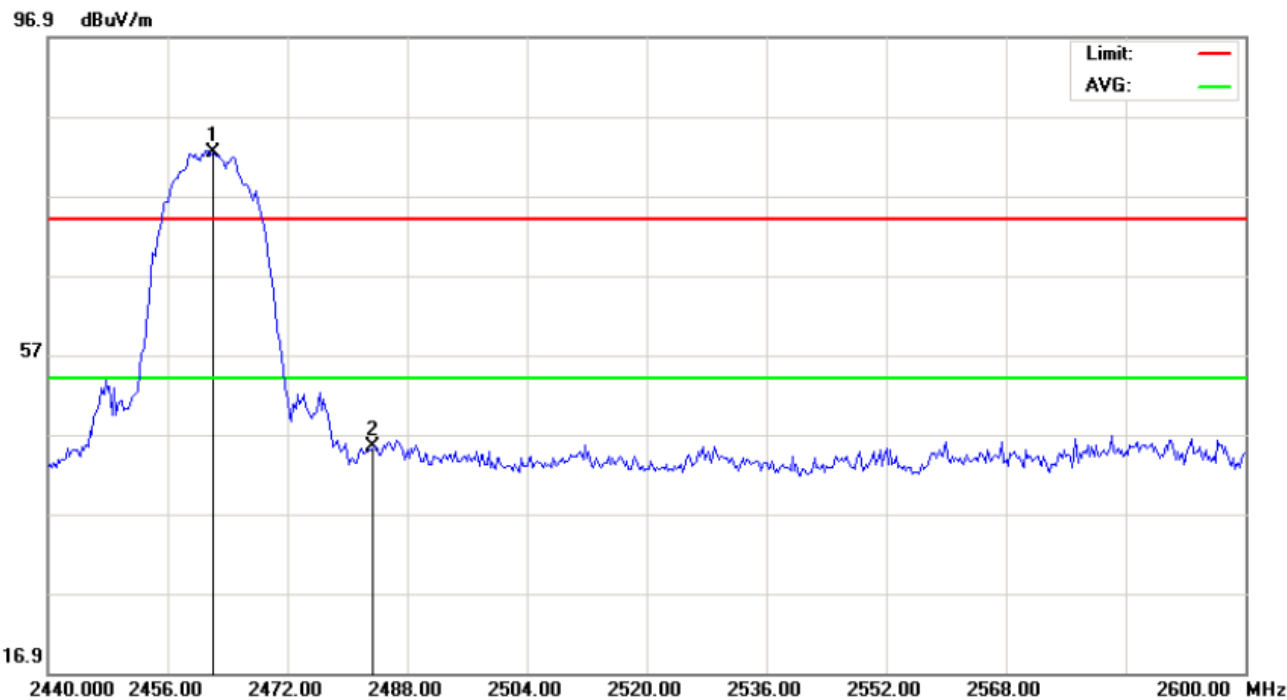


Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)	Power:	Humidity: 60 %
EUT: 11n Wireless USB Module	Distance: 3m	
M/N: HT-WM11M		
Mode: 802.11b-High Channel-TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2462.000	71.94	10.39	82.33	74.00	8.33	peak			
2		2483.500	35.00	10.41	45.41	74.00	-28.59	peak			

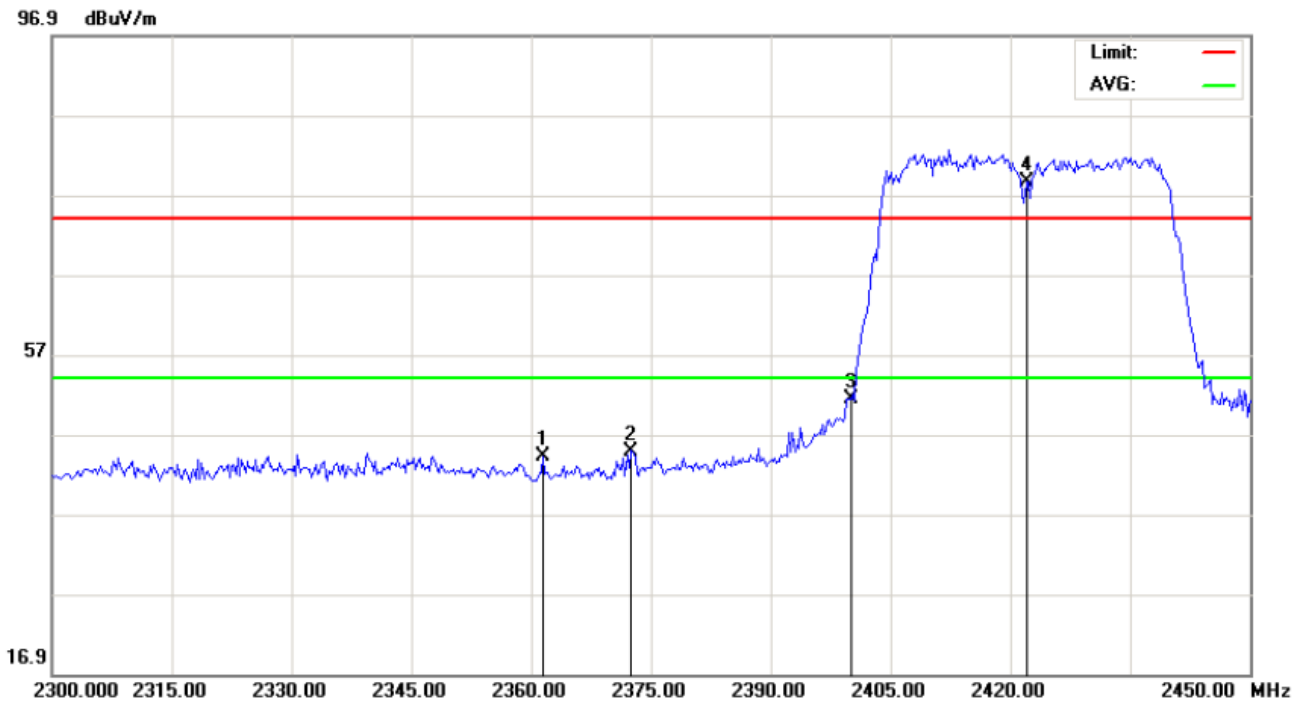


Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: 11n Wireless USB Module Distance: 3m
M/N: HT-WM11M
Mode: 802.11n40-Low Channel-TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2361.500	33.92	10.28	44.20	74.00	-29.80	peak			
2		2372.500	34.61	10.29	44.90	74.00	-29.10	peak			
3		2400.000	41.07	10.32	51.39	74.00	-22.61	peak			
4	*	2422.000	68.33	10.34	78.67	74.00	4.67	peak			

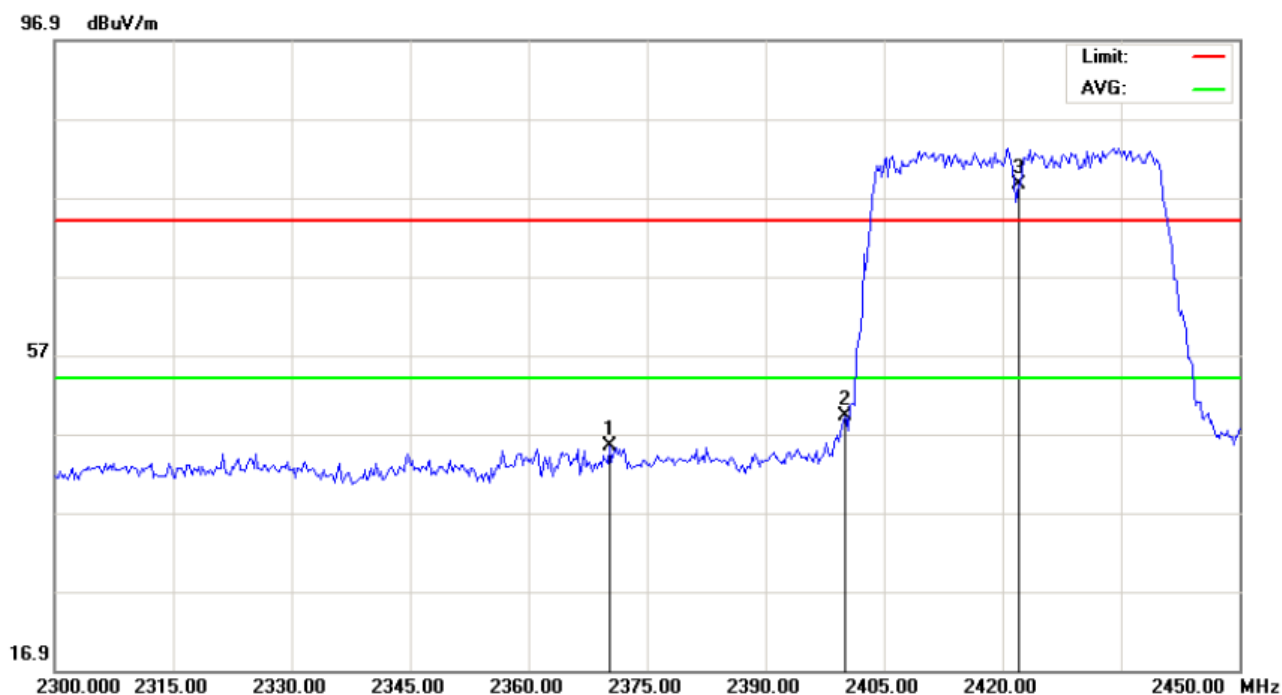

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: 11n Wireless USB Module Distance: 3m
M/N: HT-WM11M
Mode: 802.11n40-Low Channel-TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2370.250	35.14	10.29	45.43	74.00	-28.57	peak			
2		2400.000	38.93	10.32	49.25	74.00	-24.75	peak			
3	*	2422.000	68.33	10.34	78.67	74.00	4.67	peak			

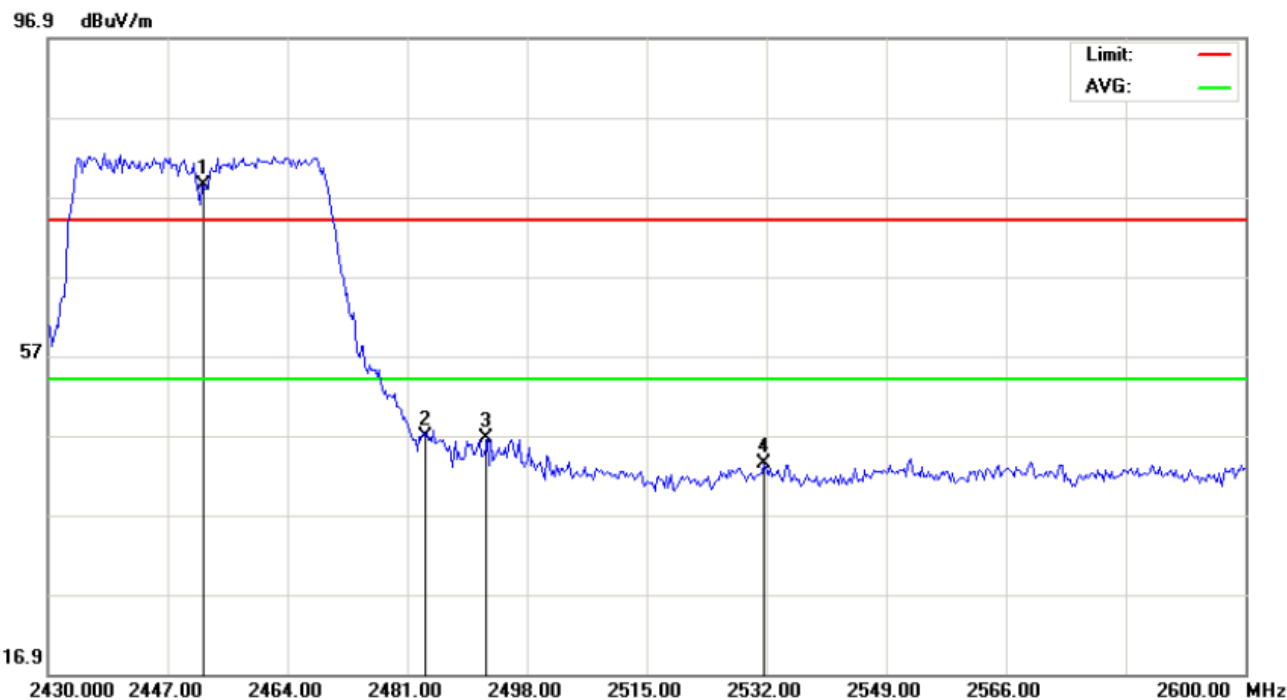

Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT: 11n Wireless USB Module


Distance: 3m

M/N: HT-WM11M

Mode: 802.11n40-High Channel-TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2452.000	68.07	10.38	78.45	74.00	4.45	peak			
2		2483.500	36.37	10.41	46.78	74.00	-27.22	peak			
3		2492.333	36.27	10.42	46.69	74.00	-27.31	peak			
4		2531.717	32.95	10.51	43.46	74.00	-30.54	peak			

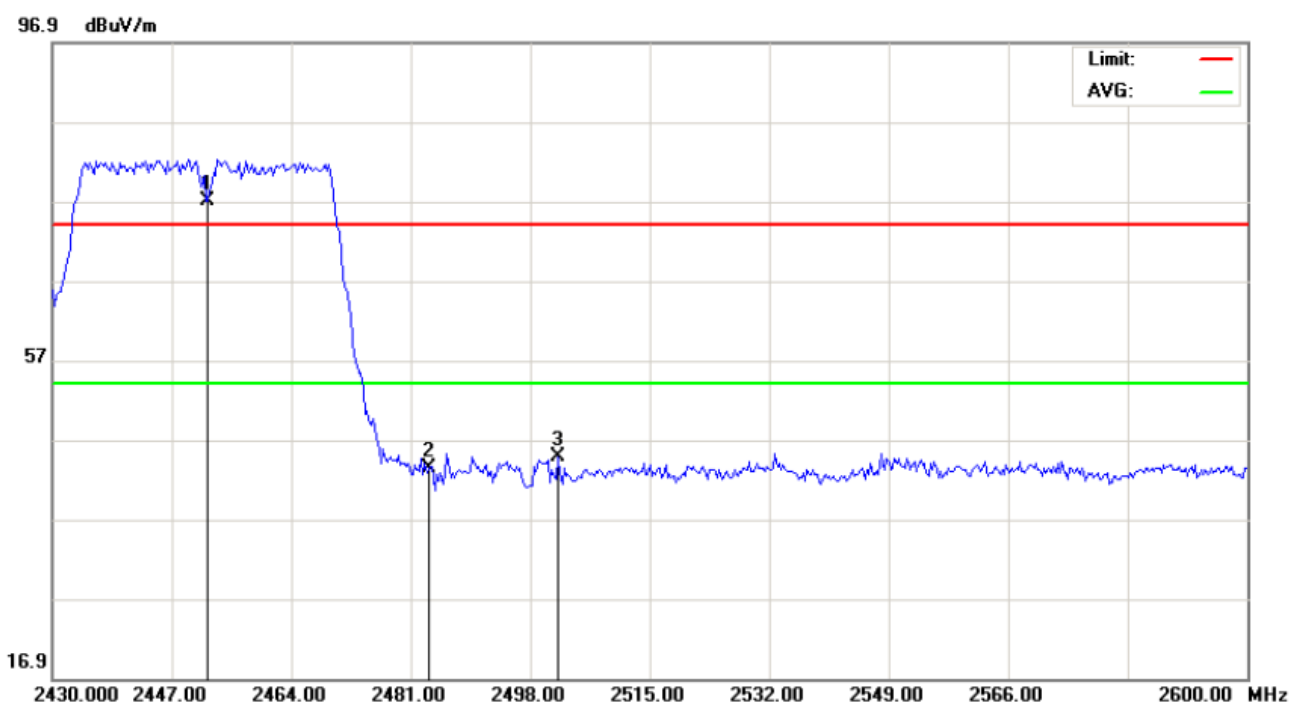

Site: site #1 Polarization: **Horizontal** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: 11n Wireless USB Module Distance: 3m
M/N: HT-WM11M
Mode: 802.11n40-High Channel-TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2452.000	66.67	10.38	77.05	74.00	3.05	peak			
2		2483.500	32.91	10.41	43.32	74.00	-30.68	peak			
3		2501.967	34.43	10.43	44.86	74.00	-29.14	peak			

Note: the other modes radiation emission have enough 20dB margin.
Measurement= Reading + Factor, Over=Measure-Limit.
External antenna and PCB antenna gain the same.


11. FCC LINE CONDUCTED EMISSION TEST

11.1 LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

**Note: 1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

11.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

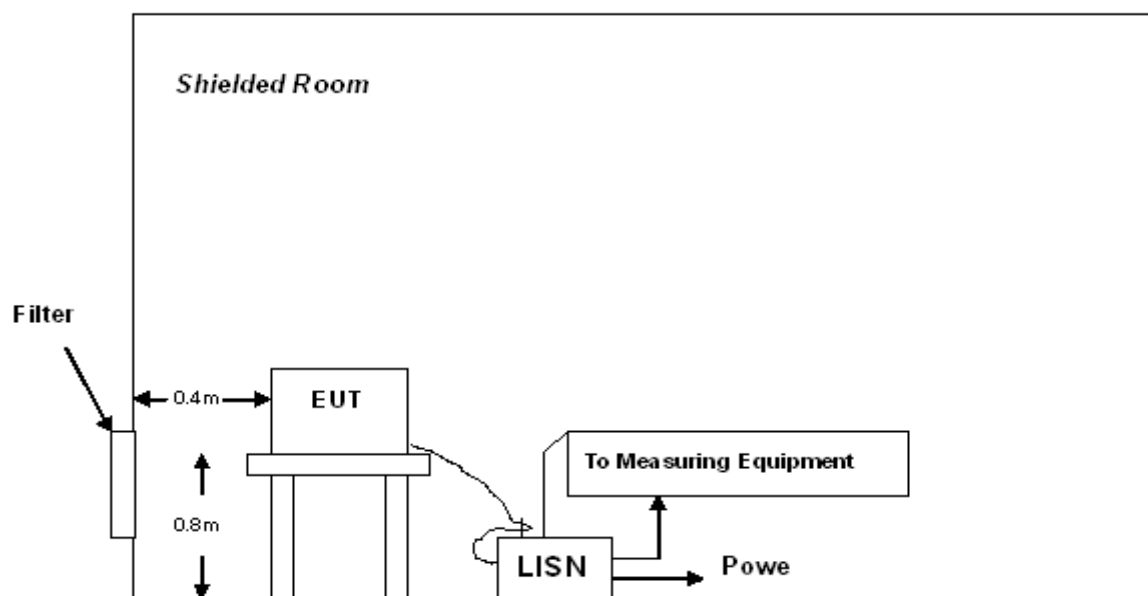

A: Powered through filter

11.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) All support equipments received AC120V power from a LISN, if any.
- 5) The EUT received DC 5V power by adapter which received 120V/60Hz power from a LISN.
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test:


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing. All the test mode were in the worst case(the lowest rate).

11.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3) The test data of the worst case condition(s) was reported on the Summary Data page.

11.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST

TEST RESULT OF L LINE

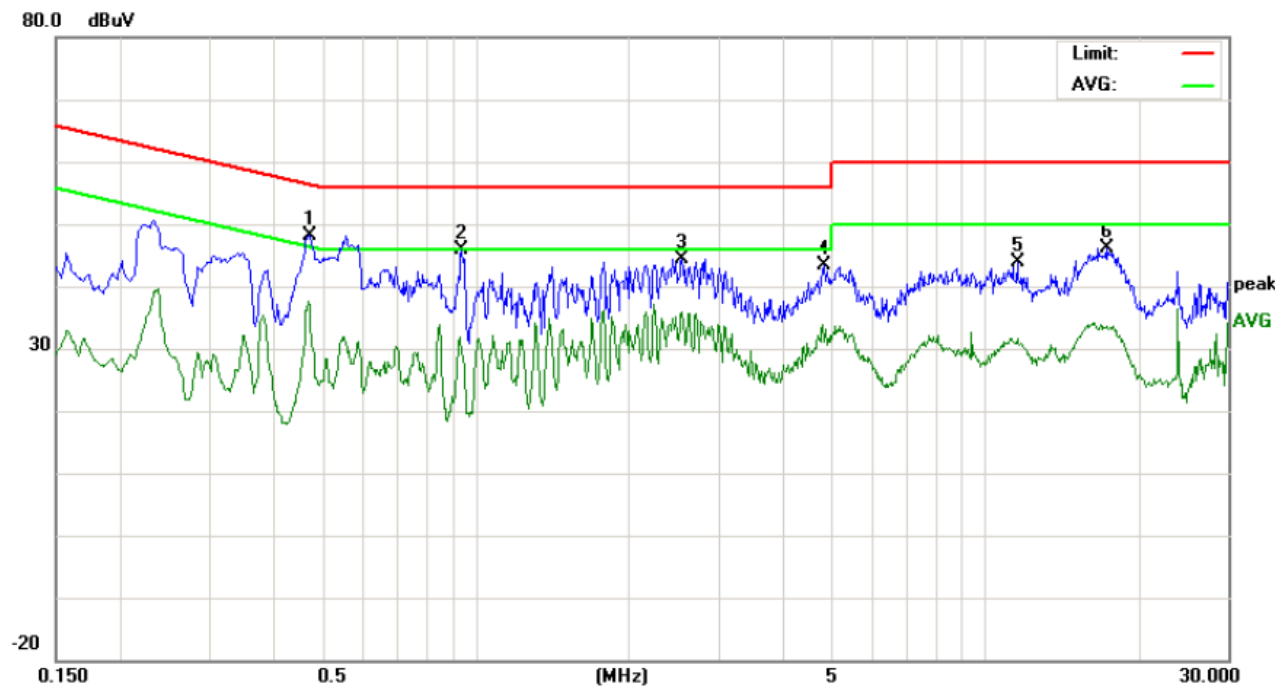


Site: Conduction
Limit: FCC Class B Conduction(QP)
EUT: 11n Wireless USB Module
M/N: HT-WM11M
Mode: Mode 1
Note:

Phase: **L1**
Power: AC 120V/60Hz
Temperature: 26
Humidity: 60 %

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.4740	37.77		24.27	10.38	48.15		34.65	56.44	46.44	-8.29	-11.79	P	
2	0.9420	35.50		19.11	10.39	45.89		29.50	56.00	46.00	-10.11	-16.50	P	
3	2.5460	34.01		25.36	10.44	44.45		35.80	56.00	46.00	-11.55	-10.20	P	
4	4.8460	33.23		20.85	10.23	43.46		31.08	56.00	46.00	-12.54	-14.92	P	
5	11.6059	33.66		21.43	10.12	43.78		31.55	60.00	50.00	-16.22	-18.45	P	
6	17.3580	35.91		23.42	10.13	46.04		33.55	60.00	50.00	-13.96	-16.45	P	


TEST RESULT OF N LINE

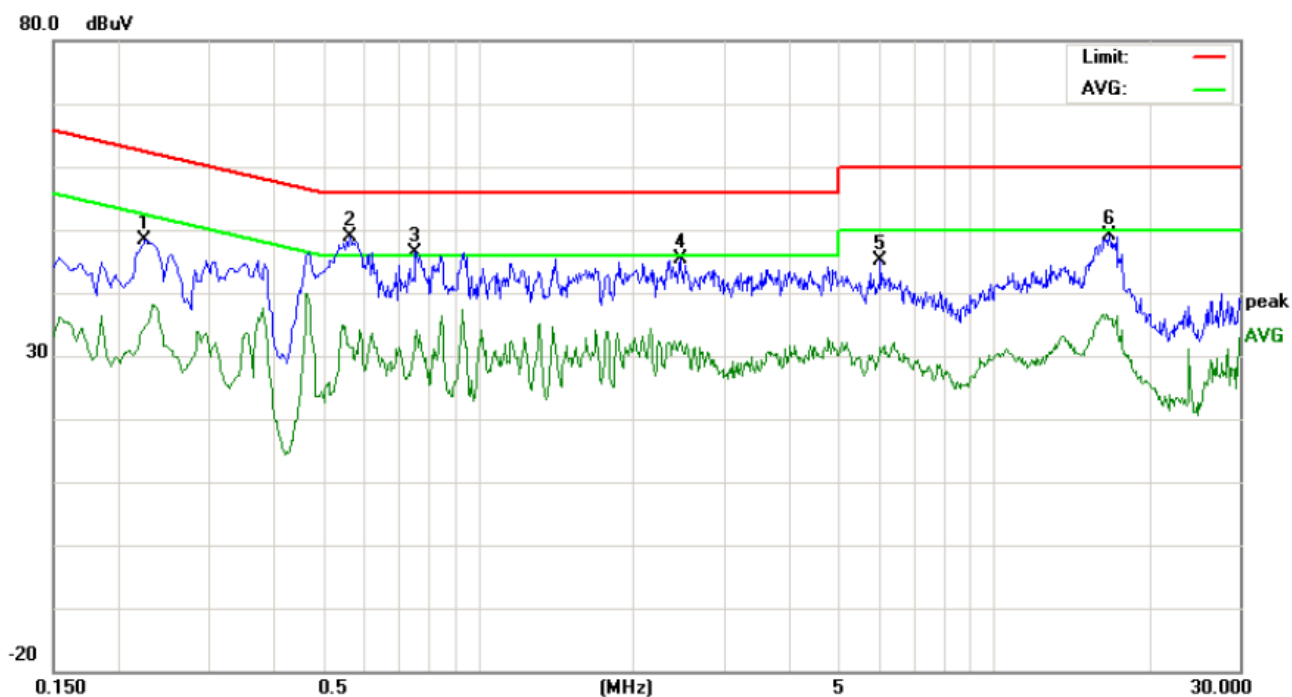


Site: Conduction Phase: **N** Temperature: 26
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %
EUT: 11n Wireless USB Module
M/N: HT-WM11M
Mode: Mode 1
Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2260	38.18		24.37	10.24	48.42		34.61	62.59	52.59	-14.17	-17.98	P	
2	0.5660	38.50	34.70	21.27	10.34	48.84	45.04	31.61	56.00	46.00	-10.96	-14.39	P	
3	0.7580	33.71		22.83	10.31	44.02		33.14	56.00	46.00	-11.98	-12.86	P	
4	2.4700	34.98		21.55	10.42	45.40		31.97	56.00	46.00	-10.60	-14.03	P	
5	6.0300	34.82		21.06	10.28	45.10		31.34	60.00	50.00	-14.90	-18.66	P	
6	16.8260	38.98		25.71	10.13	49.11		35.84	60.00	50.00	-10.89	-14.16	P	


APPENDIX I
PHOTOGRAPHS OF THE EUT
TOP VIEW OF EUT

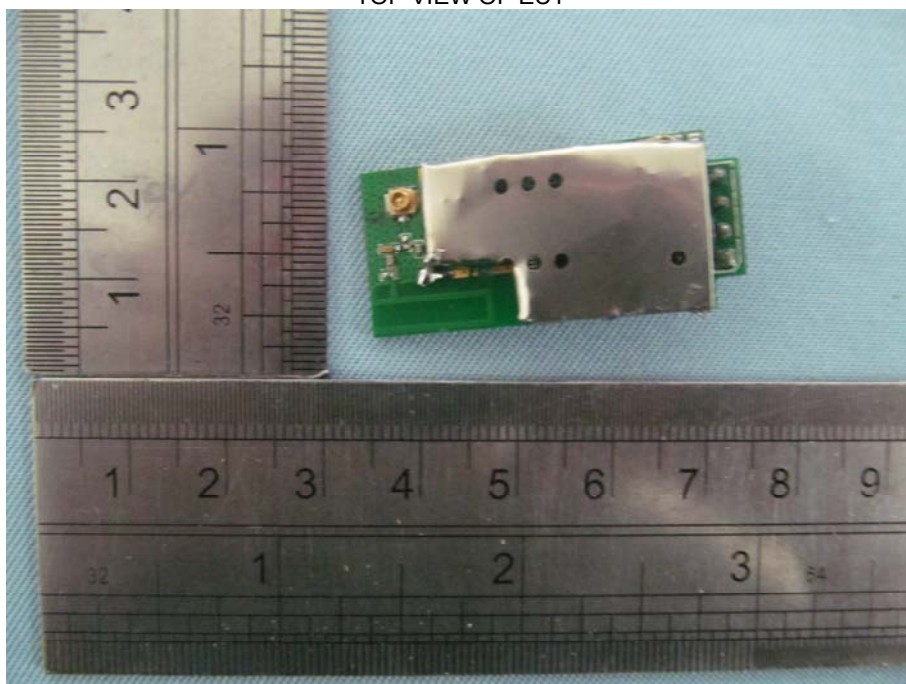

BOTTOM VIEW OF EUT

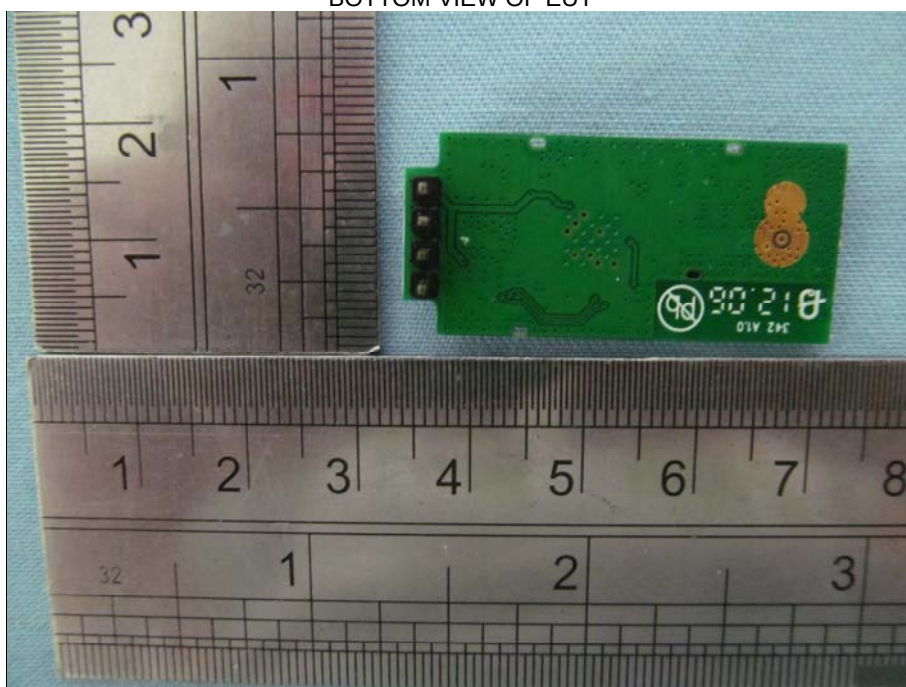


OPEN VIEW OF EUT

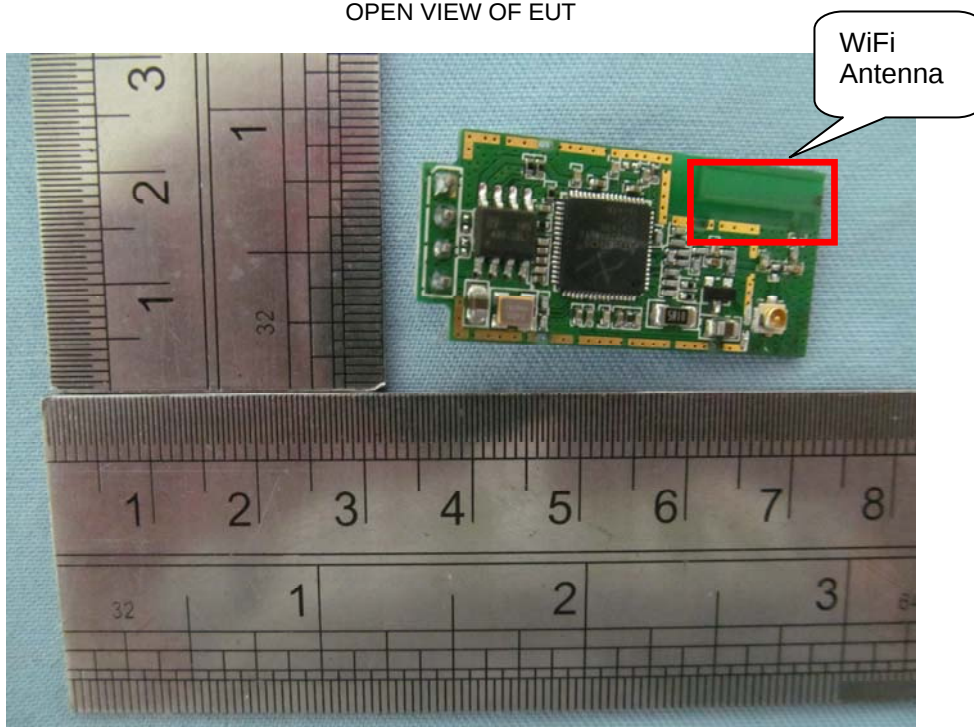

APPENDIX II
PHOTOGRAPHS OF THE TEST SETUP
CONDUCTED EMISSION TEST SETUP



RADIATED EMISSION TEST SETUP

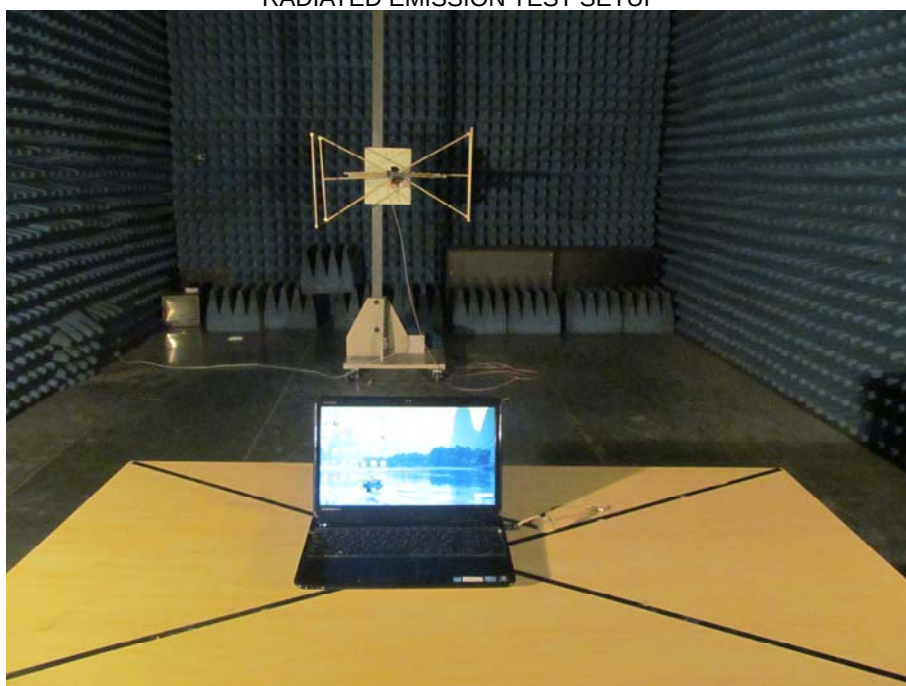

----END OF REPORT----