

TEST REPORT

Equipment Under Test	<u>Tablet PC</u>
Model No.	<u>V300</u>
FCC ID	<u>Q8XV300TM</u>
Applicant	<u>Global Brands Manufacturer Ltd.</u>
Address of Applicant	<u>9th Plant, Yue Yuen Industrial Estate, Huang Jiang Zhen, Dong Guan City, Guang Dong Province, China, Zip: 53758</u>

Standards:

FCC OET Bulletin 65 supplement C, ANSI/IEEE C95.1 , C95.3

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan E&E Services or testing done by SGS Taiwan E&E Services in connection with distribution or use of the product described in this report must be approved by SGS Taiwan E&E Services in writing.

Tested by : Dikin Yang **Date** : 2003/7/10

Approved by : Robert Chang **Date** : 2003/7/21

Contents

1. General Information

1.1 Testing Laboratory.....	3
1.2 Details of Applicant.....	3
1.3 Description of EUT(s).....	3
1.4 Operation Procedure.....	3
1.5 Test Standards and Limits.....	6

2. Summary of Results.....

3. Instruments List.....

4. Measurements.....

4.1 End-on position, lowest channel.....	9
4.2 End-on position, middle channel.....	10
4.3 End-on position, highest channel.....	11
4.4 Edge-on position, lowest channel.....	12
4.5 Edge-on position, middle channel.....	13
4.6 Edge-on position, highest channel.....	14
4.7 System Validation with flat phantom.....	15
4.7 System Noise Detect with flat phantom.....	16

System Noise Detect

APPENDIX

Photographs of Test Setup.....	17
Photographs of EUT.....	19
Probe Calibration certificate.....	21
Uncertainty Analysis.....	25
Phantom description.....	26

1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd. (FCC Registration number: 573967)
1F, No. 134, Wukung Road, Wuku industrial zone
Taipei county , Taiwan , R.O.C.
Telephone : +886-2-2299-3279
Fax : +886-2-2298-2698
Internet : <http://www.sgs.com.tw>

1.2 Details of Applicant

Name : Global Brands Manufacturer Ltd
Address : 9th Plant, Yue Yuen Industrial Estate, Huang Jiang Zhen,
Dong Guan City, Guang Dong Province, China, Zip: 53758

1.3 Description of EUT(s)

1	Product name	Tablet PC
2	Product ID	V300
3	Power supply	Internal battery , 20Volt
4	Frequency range	2412-2462 MHz

1.4-1 Operation Configuration

Configuration 1: " Edge-on" placement ; edge of the PC at 90° and at a distance of 1.5 cm from the base of the phantom (Fig.8)

Configuration 2: "End-on" placement; top cover parallel and at a distance of 1.5 cm from the base of the phantom (Fig. 10)

1.4-2 The SAR Measurement System

A photograph of the SAR measurement System is given in Fig. 8. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (Speag Dasy 4 professional system). A Model ET3DV6 1759 E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2)/\rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

1.4-3 SAR System Verification at Frequency 2.45GHz

The microwave circuit arrangement for system verification is sketched in Fig. 1. The Measured SAR distribution for the peak 1-g SAR is 13.7 m W/g and 10-g SAR is 6.02 m W/g. The measured 1-g SAR is 13.2 m W/g and 10-g SAR is 5.99 m W/g for this dipole. In comparison, it shows that the measured SAR plot is quite close to the original one.

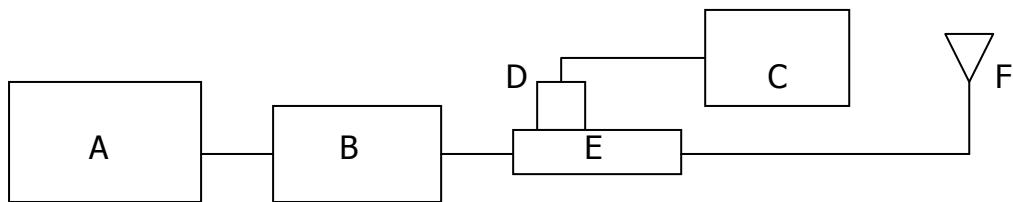


Fig. 1 The microwave circuit arrangement used for SAR system verification

- A. Agilent Model 8648D Signal Generator
- B. Mini circuits Model ZHL-42 Amplifier
- C. Agilent Model E4416A Power Meter
- D. Agilent Model 8482H Power Sensor
- E. Agilent Model 778D Dual directional coupling
- F. Reference dipole antenna

1.4-4 Tissue Simulant Fluid for the Frequency Band 2.4 to 2.5 GHz

The dielectric properties for this body-simulant fluid were measured by using the HP Model 85070D Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with HP 8714ET Network Analyzer(300 KHz-3000 MHz) by using a procedure detailed in Section V. The Measured dielectric parameters of the body-simulant fluid at 2400 MHz are $\rho = 52.5 \pm 5\%$, $\sigma = 2.00 \pm 10\%$ S/m. The measured properties are close to the values of $\rho = 51.66$ and $\sigma = 1.943$ S/m. The Conductivity (σ) and Permittivity (ρ) are listed in Table 1. For the SAR measurement given in this report . We obtain the desired dielectric properties to simulate the body tissue at the midband frequency of 2437MHz to be $\rho=51.62$ and $\sigma=1.991$ S/m.(Table 1) The temperature variation of the Tissue Simulant Fluid was 22°C and the Humidity was 41%. A

photograph of the Tissue Simulant Fluid liquid depth 15cm is given in Fig. 11.

Channel	Frequency (MHz)	Conductivity (σ)	Permittivity (ρ)
01	2412	1.958	51.71
06	2437	1.991	51.62
11	2462	2.018	51.45

Table 1. Dielectric parameters for the Frequency Band 2.4 to 2.5 GHz

1.4-5 Operation Procedure

We have used the measurement procedure for SAR compliance testing of the 802.11b Mini PCI built into Tablet PC .The Photographs of the Tablet Pc with built-in 802.11b Mini PCI Wireless Antennas are given in Fig .11 and Fig .12. Even thought two 802.11b antennas are built into the top and left side(Fig .13),Only Master of the two Antenna is active at TX & RX, Slave antenna Active at RX, so the Master antenna is used for SAR measurement.

By using the program subordinated in the computer, and change into the written channel, and then set in highest power. Finally, we will test it by dividing into 2 ways.

Configuration 1: " Edge-on" placement ; edge of the PC at 90° and at a distance of 1.5 cm from the base of the phantom.

Configuration 2: "End-on" placement; top cover parallel and at a distance of 1.5 cm from the base of the phantom .

The way by using the holder makes EUT 1.5cm close to the flat phantom then aim the center, and start to make the measurement. In doing so, we can measure six data(See Fig. 2-7.) The Peak 1-g SARs for the various configurations of the Tablet Pc with built-in 802.11 b Mini PCI are summarized in Table 2. All of the measured 1-g SARs are less then the FCC 96-326 guideline of 1.6 W/kg .

1-g SAR in W/kg

Pc position relative to the flat phantom	2412 MHz channel 1	2437 MHz channel 6	2462 MHz channel 11
EUT Output Power	15.68 dbm	15.93 dbm	15.43 dbm
Configuration 1 Edge-on	0.0341	0.0255	0.0219

Configuration 2 End-on	0.0303	0.0279	0.0201
----------------------------------	--------	--------	--------

Table .2 The peak 1-g SAR measured for the Tablet PC

The lowest channel supported by the EUT is channel 0, and highest channel can be measured is channel 11. So the channels above are used as the lowest and highest channel in the testing, and the middle channel is set as channel 06.

1.5 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1–1992, Copyright 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

(1) Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube). Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety

program in a work environment.

(2) Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.

2. Summary of Results

EUT position	Peak SAR (W/Kg)	1g Average (mW/g)	10g Average (mW/g)	Max value of SAR (mW/g)	Verdict
Edge-on position, lowest channel	0.0763	0.0341	0.0176	0.0353	PASS
Edge-on position, middle channel	0.0495	0.0255	0.0137	0.0291	PASS
Edge-on position, highest channel	0.0558	0.0219	0.0113	0.0234	PASS
End-on position, lowest channel	0.0627	0.0303	0.0161	0.0335	PASS
End-on position, middle channel	0.0725	0.0279	0.014	0.029	PASS
End-on position , highest channel	0.0494	0.0201	0.00995	0.0237	PASS

3. Instruments List

Instrument	Model	Serial number
Desktop PC	Compaq EVO	N/A
Dasy 4 professional system	Ver 4.1 build 47	N/A
Probe	ET3DV6	1759
DAE	DAE3	547
Robot	RX90BL	N/A
Notebook PC	V300	N/A

4. Measurements

Edge-on position, lowest channel

Date/Time: 07/07/03 16:42:07

DUT: Wireless Lan 802.11b; Type: Wireless Card;
Program: Tablet PC

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 1.95826 \text{ mho/m}$, $\epsilon_r = 51.7097$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Horizontal/Area Scan (141x41x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 2.1 V/m

Power Drift = -0.06 dB

Maximum value of SAR = 0.0291 mW/g

Horizontal/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.0763 W/kg

SAR(1 g) = 0.0341 mW/g; SAR(10 g) = 0.0176 mW/g

Reference Value = 2.1 V/m

Power Drift = -0.06 dB

Maximum value of SAR = 0.0353 mW/g

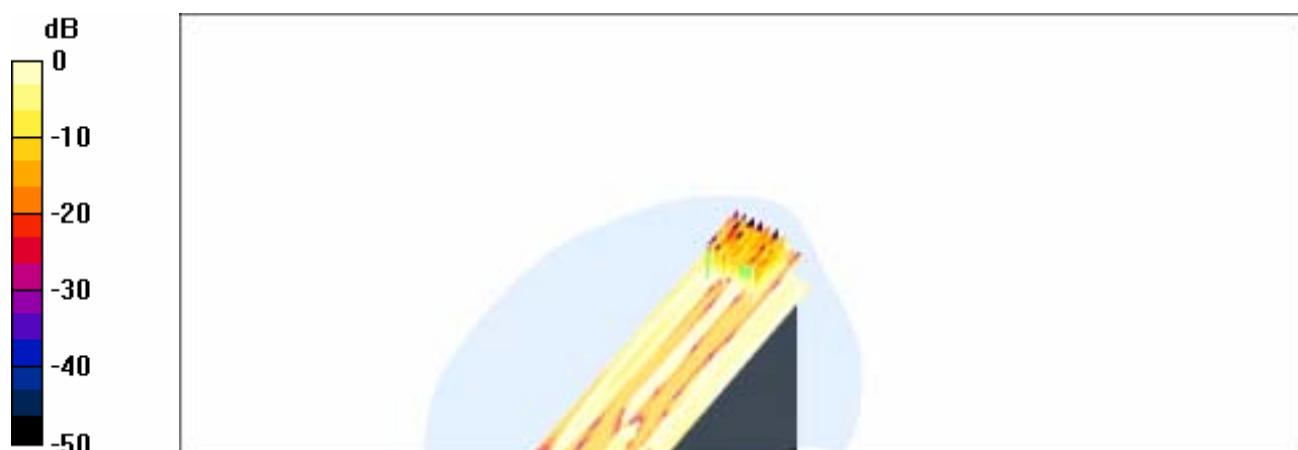

Edge-on position, middle channel

**DUT: Wireless Lan 802.11b; Type: Wireless Card;
Program: Tablet PC**

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 1.99146 \text{ mho/m}$, $\epsilon_r = 51.6172$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Horizontal/Area Scan (41x141x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 2.22 V/m

Power Drift = 0.2 dB

Maximum value of SAR = 0.0281 mW/g

Horizontal/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.0495 W/kg

SAR(1 g) = 0.0255 mW/g; SAR(10 g) = 0.0137 mW/g

Reference Value = 2.22 V/m

Power Drift = 0.2 dB

Maximum value of SAR = 0.0291 mW/g



Edge-on position, highest channel

**DUT: Wireless Lan 802.11b; Type: Wireless Card;
Program: Tablet PC**

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: M2450 ($\sigma = 2.01798 \text{ mho/m}$, $\epsilon_r = 51.4499$, $\rho = 1000 \text{ kg/m}^3$)
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Horizontal/Area Scan (41x141x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 2.08 V/m

Power Drift = -0.6 dB

Maximum value of SAR = 0.0204 mW/g

Horizontal/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.0558 W/kg

SAR(1 g) = 0.0219 mW/g; SAR(10 g) = 0.0113 mW/g

Reference Value = 2.08 V/m

Power Drift = -0.6 dB

Maximum value of SAR = 0.0234 mW/g



End-on position, lowest channel

**DUT: Wireless Lan 802.11b; Type: Wireless Card;
Program: Tablet PC**

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: M2450 ($\sigma = 1.95826 \text{ mho/m}$, $\epsilon_r = 51.7097$, $\rho = 1000 \text{ kg/m}^3$)
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Horizontal/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 2.47 V/m

Power Drift = -1 dB

Maximum value of SAR = 0.0362 mW/g

Horizontal/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.0627 W/kg

SAR(1 g) = 0.0303 mW/g; SAR(10 g) = 0.0161 mW/g

Reference Value = 2.47 V/m

Power Drift = -1 dB

Maximum value of SAR = 0.0335 mW/g

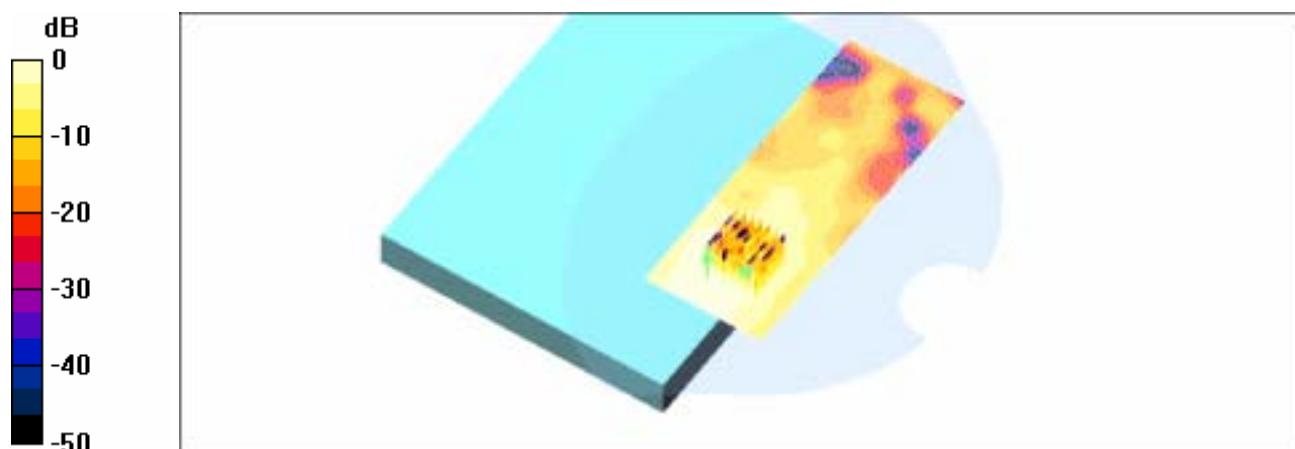

0 dB = 0.0335mW/g

End-on position, middle channel

**DUT: Wireless Lan 802.11b; Type: Wireless Card;
Program: Tablet PC**

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: M2450 ($\sigma = 1.99146$ mho/m, $\epsilon_r = 51.6172$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Horizontal/Area Scan (41x121x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 2.19 V/m

Power Drift = -1 dB

Maximum value of SAR = 0.0306 mW/g

Horizontal/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.0725 W/kg

SAR(1 g) = 0.0279 mW/g; SAR(10 g) = 0.014 mW/g

Reference Value = 2.19 V/m

Power Drift = -1 dB

Maximum value of SAR = 0.029 mW/g

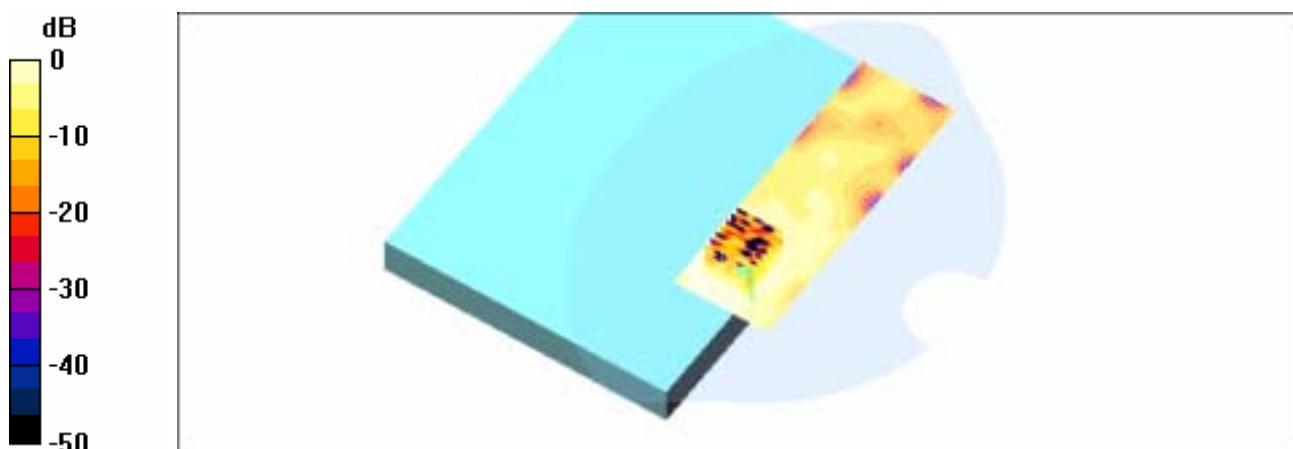

End-on position, highest channel

**DUT: Wireless Lan 802.11b; Type: Wireless Card;
Program: Tablet PC**

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: M2450 ($\sigma = 2.01798 \text{ mho/m}$, $\epsilon_r = 51.4499$, $\rho = 1000 \text{ kg/m}^3$)
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Horizontal/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 1.62 V/m

Power Drift = 0.9 dB

Maximum value of SAR = 0.022 mW/g

Horizontal/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.0494 W/kg

SAR(1 g) = 0.0201 mW/g; SAR(10 g) = 0.00995 mW/g

Reference Value = 1.62 V/m

Power Drift = 0.9 dB

Maximum value of SAR = 0.0237 mW/g

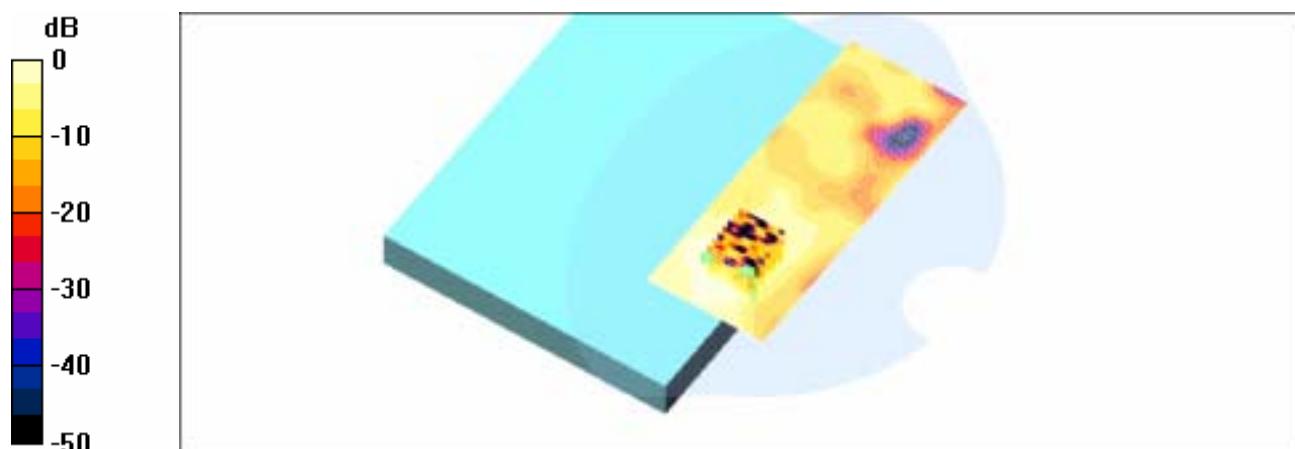

SAR System Verification

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:727

Program: Dipole at 2450 MHz

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 1.93 \text{ mho/m}$, $\epsilon_r = 51.17$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

System Test/Area Scan (101x101x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 92.1 V/m

Power Drift = 0.02 dB

Maximum value of SAR = 14.9 mW/g

System Test/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 28.7 W/kg

SAR(1 g) = 13.2 mW/g; SAR(10 g) = 5.99 mW/g

Reference Value = 92.1 V/m

Power Drift = 0.02 dB

Maximum value of SAR = 14.7 mW/g

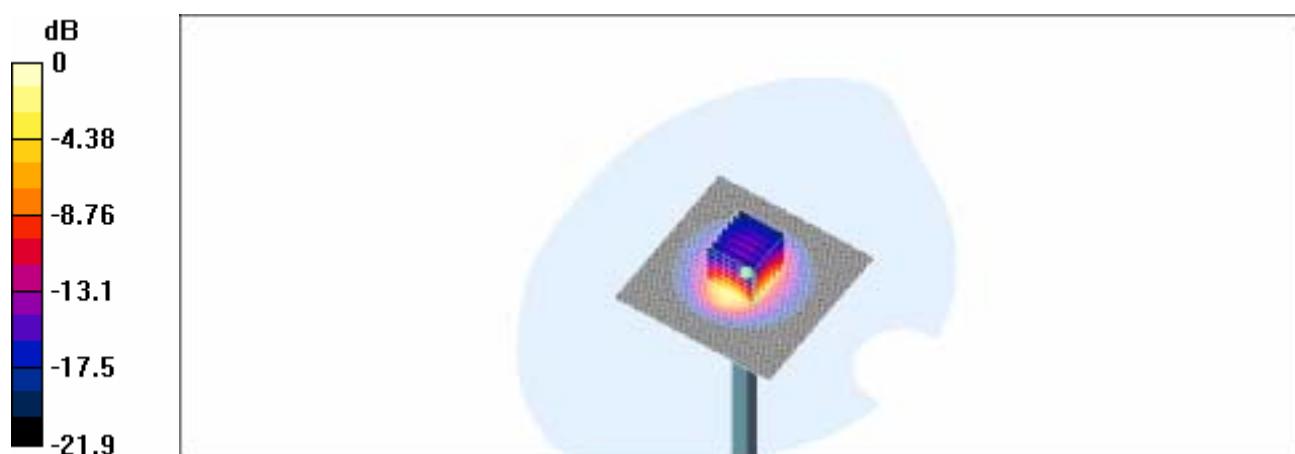

0 dB = 14.7mW/g

System Noise Detect

**DUT: Wireless Lan 802.11b; Type: Wireless Card;
Program: System Validation**

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: M2450 ($\sigma = 1.95826 \text{ mho/m}$, $\epsilon_r = 51.7097$, $\rho = 1000 \text{ kg/m}^3$)
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Horizontal/Area Scan (131x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 0.122 V/m

Power Drift = 1e+01 dB

Maximum value of SAR = 11.3 mW/g

Horizontal/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.00612 W/kg

SAR(1 g) = 0.000388 mW/g; SAR(10 g) = 0.000146 mW/g

Reference Value = 0.122 V/m

Power Drift = 1e+01 dB

Maximum value of SAR = 0.000807 mW/g

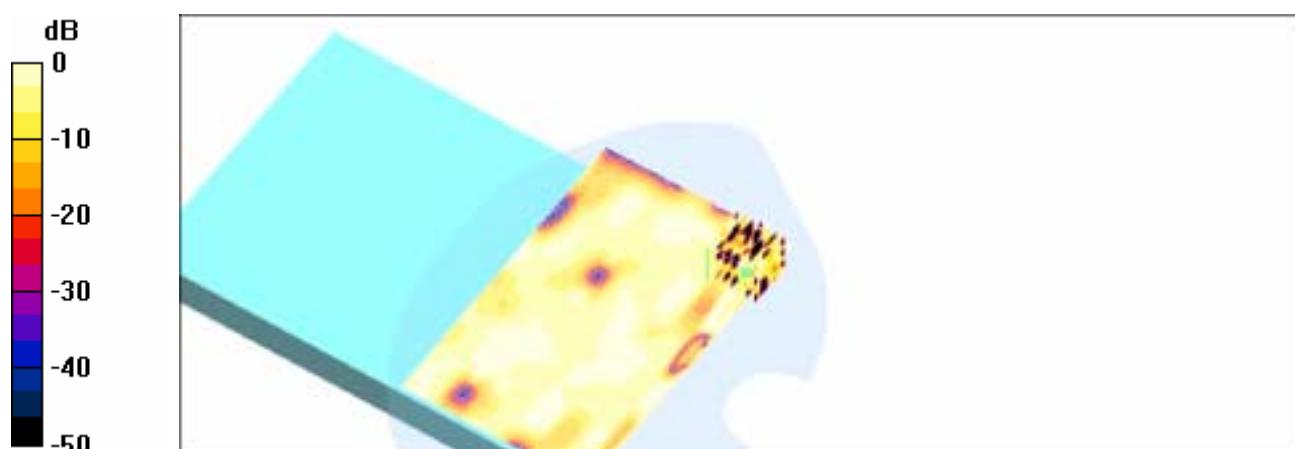

0 dB = 0.000807mW/g

Appendix Photographs of Test Setup



Fig.1 Photograph of the SAR measurement System



Fig.8 Photograph of the edge of the PC at 90° and at a distance of 1.5 cm from the base of the phantom

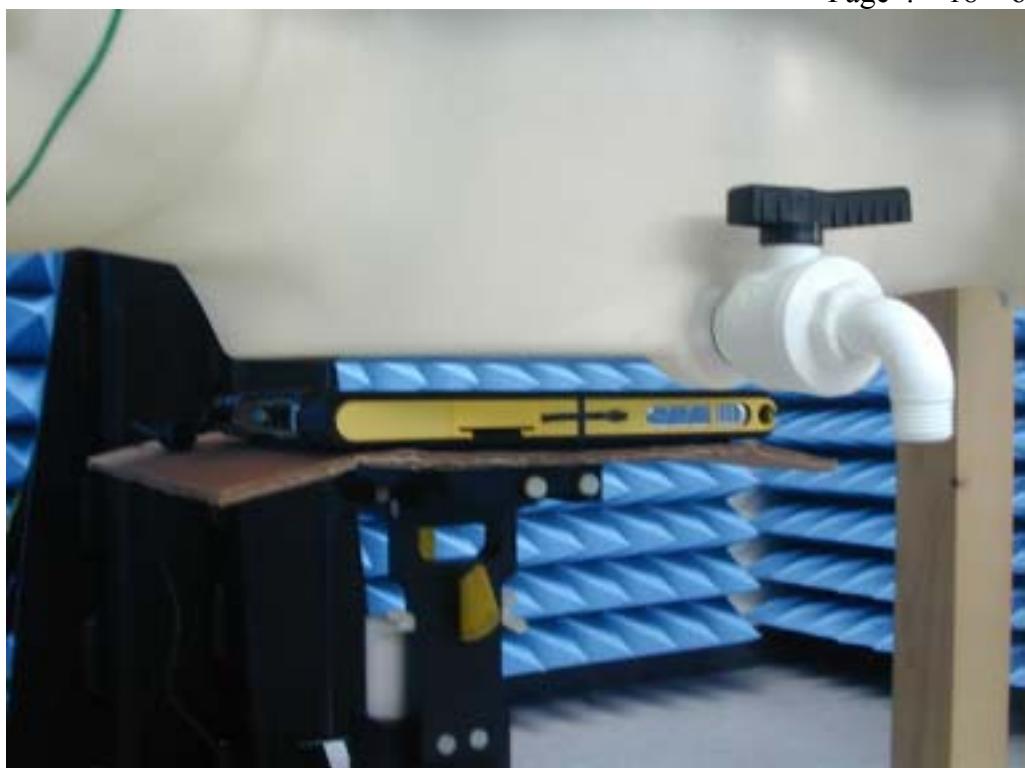


Fig.9

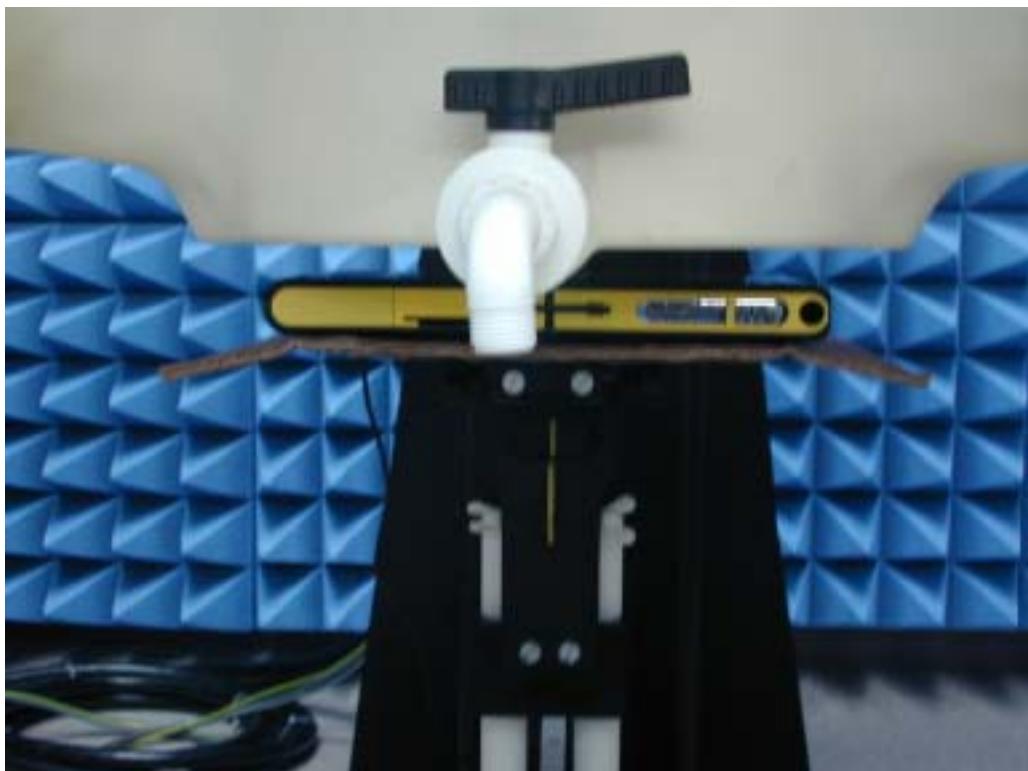


Fig.10 Photograph of the top cover parallel and at a distance of 1.5 cm from the base of the phantom

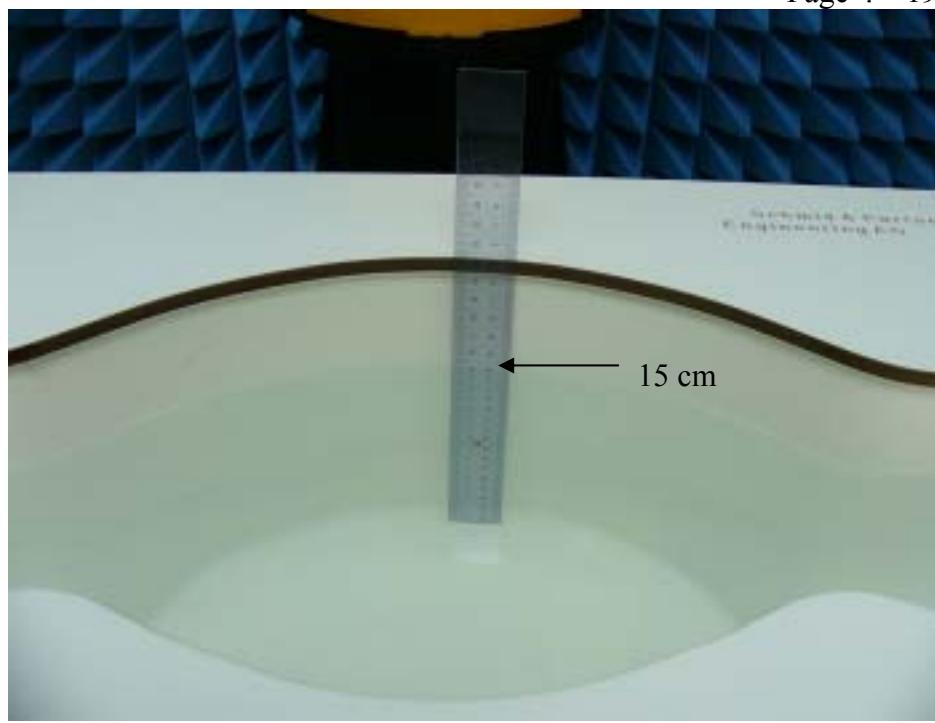


Fig.11 Photograph of the Tissue Simulant Fluid liquid depth 15cm

Photographs of the EUT



View from Top.

Fig.11 Photograph of the Tablet Pc with built-in 802.11 b Mini PCI Wireless Antennas



View from bottom side of the laptop computer.

Fig.12 Photograph of the Tablet Pc with built-in 802.11 b Mini PCI Wireless Antennas

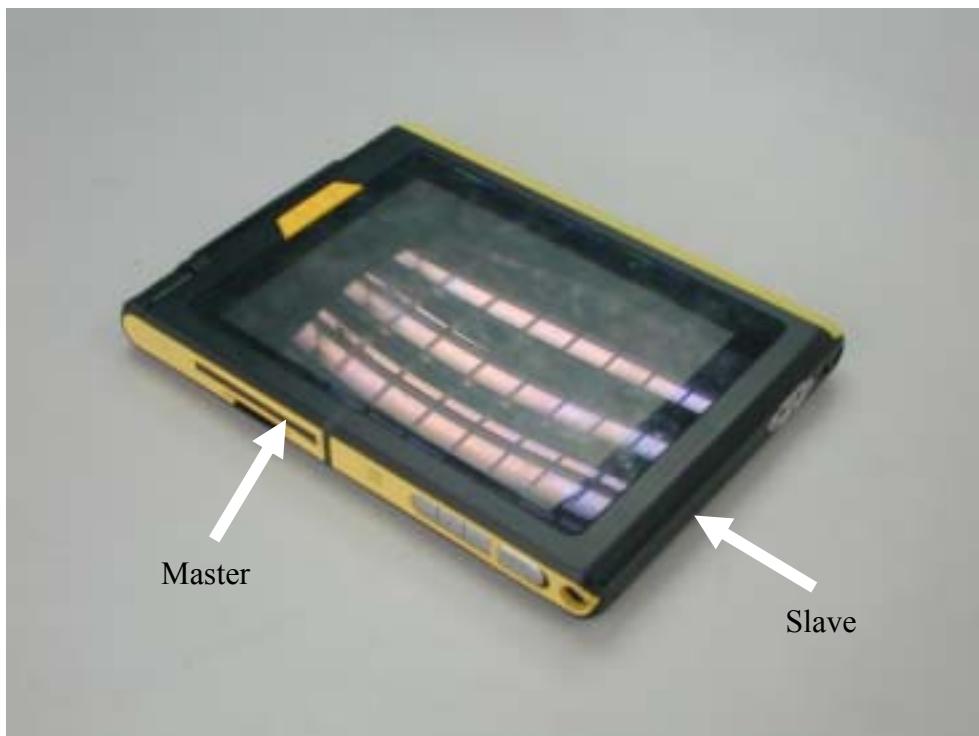


Fig.13 Photograph of the Tablet Pc that Master and Slave 802.11b antennas are identical and the Master antenna is used for SAR measurement

Probe Calibration certificate

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

Client **SGS (Auden)**

CALIBRATION CERTIFICATE

Object(s) **ET3DV6 - SN:1759**

Calibration procedure(s) **QA CAL-01.v2**
Calibration procedure for dosimetric E-field probes

Calibration date: **March 7, 2003**

Condition of the calibrated item **In Tolerance (according to the specific calibration document)**


This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date	Scheduled Calibration
RF generator HP 8584C	US3642U01700	4-Aug-99 (in house check Aug-02)	In house check: Aug-05
Power sensor E4412A	MY41495277	8-Mar-02	Mar-03
Power sensor HP 8481A	MY41092180	18-Sep-02	Sep-03
Power meter EPM E4419B	0841293874	13-Sep-02	Sep-03
Network Analyzer HP 8753E	US38432426	3-May-00	In house check: May 03
Fluke Process Calibrator Type 702	SN: 6295803	3-Sep-01	Sep-03

Calibrated by: **Name** **Nico Verber** **Function** **Technician** **Signature** 

Approved by: **Name** **Katja Pokorni** **Function** **Laboratory Director** **Signature** 

Date issued: March 7, 2003

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 1 245 9700, Fax +41 1 245 9778
info@speag.com, http://www.speag.com

Probe ET3DV6

SN:1759


Manufactured: November 12, 2002
Last calibration: March 7, 2003

Calibrated for DASY Systems


(Note: non-compatible with DASY2 system!)

ET3DV6 SN:1759


March 7, 2003

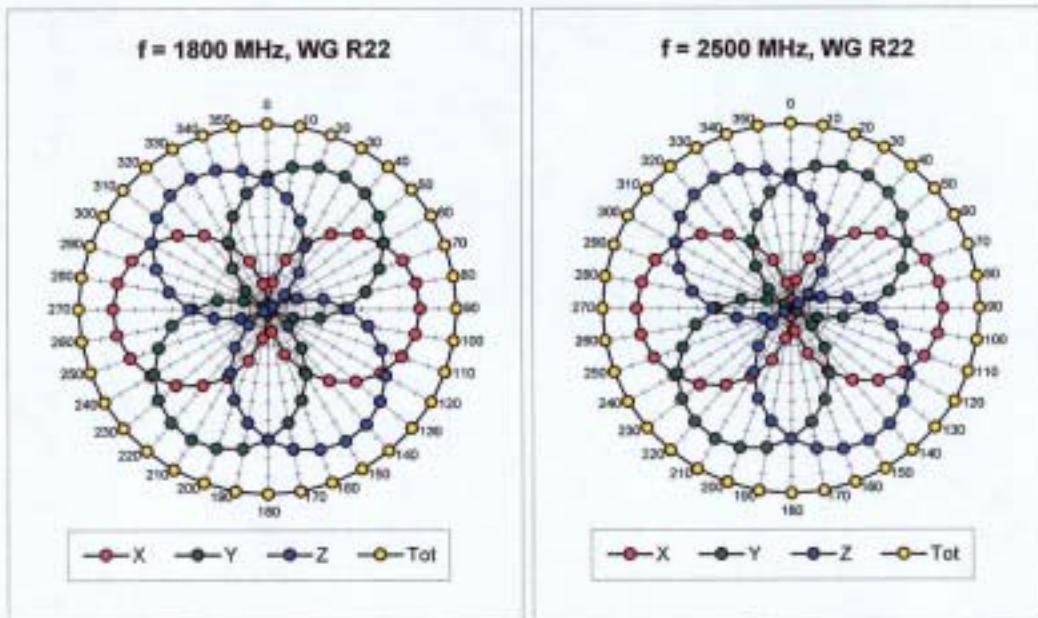

Isotropy Error (ϕ), $\theta = 0^\circ$

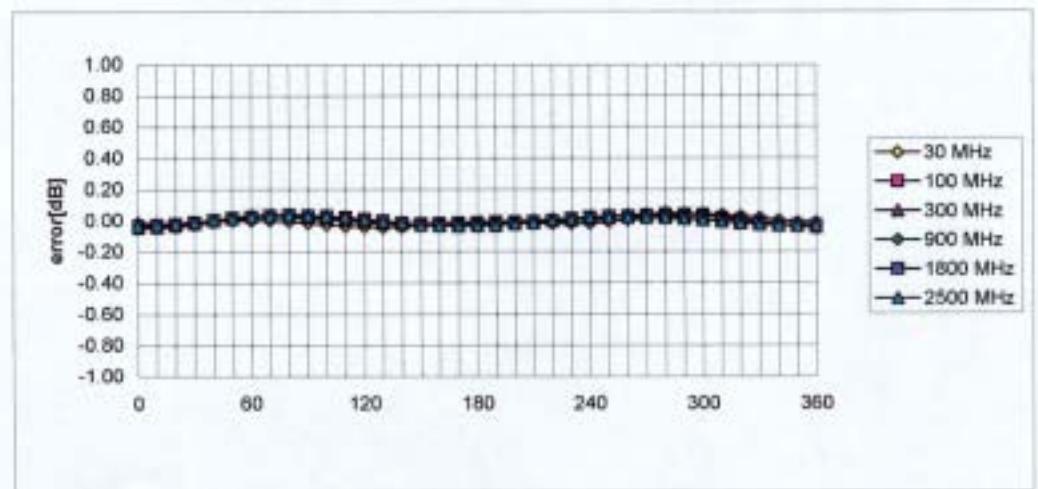

Conversion Factor Assessment

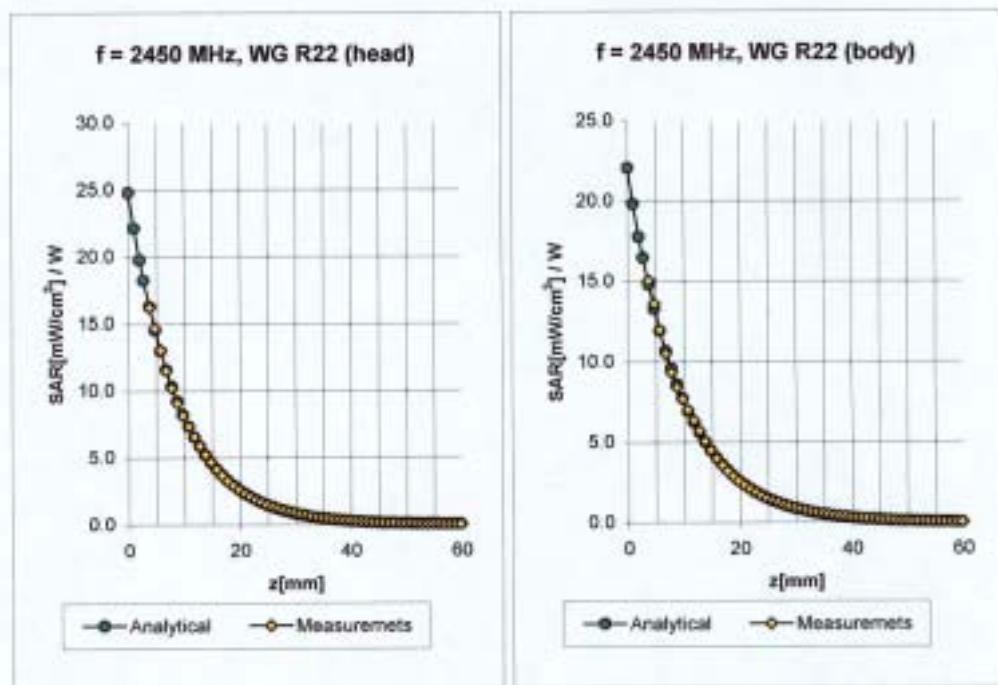

2450 Head MHz $\epsilon_r = 39.2 \pm 5\%$ $\sigma = 1.80 \pm 5\% \text{ mho/m}$

ConvF X	$5.0 \pm 8.9\% \text{ (k=2)}$	Boundary effect:
ConvF Y	$5.0 \pm 8.9\% \text{ (k=2)}$	Alpha 0.98
ConvF Z	$5.0 \pm 8.9\% \text{ (k=2)}$	Depth 1.95

2450 Body MHz $\epsilon_r = 52.7 \pm 5\%$ $\sigma = 1.95 \pm 5\% \text{ mho/m}$

ConvF X	$4.5 \pm 8.9\% \text{ (k=2)}$	Boundary effect:
ConvF Y	$4.5 \pm 8.9\% \text{ (k=2)}$	Alpha 1.01
ConvF Z	$4.5 \pm 8.9\% \text{ (k=2)}$	Depth 1.80

Uncertainty Analysis

DASY4 Uncertainty Budget According to IEEE P1528 [1]								
Error Description	Uncertainty value	Prob. Dist.	Div.	(c_i) 1g	(c_i) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v_i) v_{eff}
Measurement System								
Probe Calibration	±4.8%	N	1	1	1	±4.8%	±4.8%	∞
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Readout Electronics	±1.0%	N	1	1	1	±1.0%	±1.0%	∞
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%	∞
RF Ambient Conditions	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Probe Positioner	±0.4%	R	$\sqrt{3}$	1	1	±0.2%	±0.2%	∞
Probe Positioning	±2.9%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Max. SAR Eval.	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Test Sample Related								
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	875
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%	∞
Phantom and Setup								
Phantom Uncertainty	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%	∞
Liquid Conductivity (target)	±5.0%	R	$\sqrt{3}$	0.64	0.43	±1.8%	±1.2%	∞
Liquid Conductivity (meas.)	±2.5%	N	1	0.64	0.43	±1.6%	±1.1%	∞
Liquid Permittivity (target)	±5.0%	R	$\sqrt{3}$	0.6	0.49	±1.7%	±1.4%	∞
Liquid Permittivity (meas.)	±2.5%	N	1	0.6	0.49	±1.5%	±1.2%	∞
Combined Std. Uncertainty						±10.3%	±10.0%	331
Expanded STD Uncertainty						±20.6%	±20.1%	

Phantom description

Schmid & Partner Engineering AG

Zauggassestrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Certificate of conformity / First Article Inspection

Item	SAM Twin Phantom V4.0
Type No	QD 000 P40 CA
Series No	TP-1150 and higher
Manufacturer / Origin	Untersee Composites Hauptstr. 69 CH-8559 Fruthwilen Switzerland

Tests

The series production process used allows the limitation to test of first articles. Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

Test	Requirement	Details	Units tested
Shape	Compliance with the geometry according to the CAD model.	IT'S CAD File (*)	First article, Samples
Material thickness	Compliant with the requirements according to the standards	2mm +/- 0.2mm in specific areas	First article, Samples
Material parameters	Dielectric parameters for required frequencies	200 MHz - 3 GHz Relative permittivity < 5 Loss tangent < 0.05.	Material sample TP 104-5
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards	Liquid type HSL 1800 and others according to the standard.	Pre-series, First article

Standards

- [1] CENELEC EN 60361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9

(*) The IT'S CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date 28.02.2002

Schmid & Partner
Engineering AG

Zauggassestrasse 43, CH-8004 Zurich
Tel. +41 1 245 97 00, Fax +41 1 245 97 79

Signature / Stamp

F. Bommelt

Stefan Bommelt