



Königswinkel 10  
D-32825 Blomberg  
Telephon +49(0)5235 / 9500-0  
Telefax +49(0)5235 / 9500-10


# Test Report

No.: E20608 Edition 3, 2nd Version

Designation of equipment under test:


AIS Transponder X-Pack DS

EMC Test Laboratory  
accredited by  
DATech e.V.  
in compliance with DIN EN ISO/IEC 17025  
under the  
Reg. No. TTI-P-G071/94-11

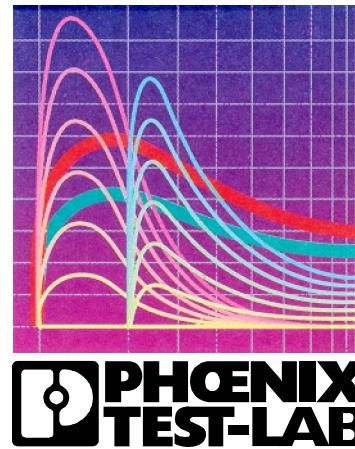

The copying of excerpts from this report is not permitted without written the consent of the testing body.  
The test results indicated in this report refer exclusively to the equipment under test specified below.  
It is not permitted to transfer the results to other systems or configurations.

Testing body:	PHOENIX TEST-LAB Königswinkel 10 D-32825 Blomberg Germany
Client:	Nauticast Schifffsnavigationssysteme AG Mariahilfer Strasse 50/2/11 A-1070 Vienna, Austria
Order number:	20608
Type of test:	Testing of the electromagnetic disturbances characteristics Testing of the electromagnetic immunity characteristics
Tested on the basis of:	<i>EN 60945 Navigations- und Funkkommunikationsgeräte und Systeme für die Seeschifffahrt, Edition September 1997</i> <i>IEC 60945 Ed. 4 date of circulation 2001-02-02 closing date for voting 2001-07-06</i>
Disturbance emission:	Chapter 9.2: Conducted emissions Chapter 9.3: Radiated emissions from enclosure port The limits and requirements according to <i>EN 60945</i>
Immunity interference:	Chapter 10.2: Conducted low-frequency interference Chapter 10.3: Conducted high-frequency interference Chapter 10.4: Electromagnetic fields Chapter 10.5: Conducted fast transients (burst) Chapter 10.6: Conducted slow transients (surge) Chapter 10.7: Power supply variations Chapter 10.8: Power supply failure Chapter 10.9: Electrostatic discharge Chapter 5.2.3: Confusing of the DC-poles
	The limits and requirements according to <i>EN 60945</i>

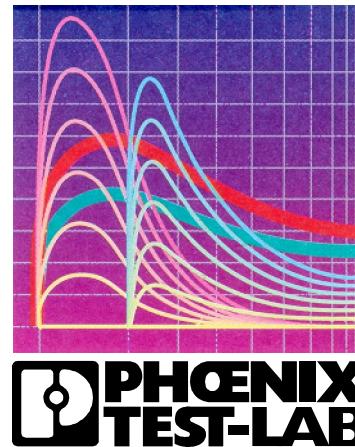

Equipment under test, EUT: AIS-Transponder

Type identification: X-Pack DS

Serial-No.: Q6P8368694

Manufacturer: Nauticast Schifffsnavigationssysteme AG  
Mariahilfer Strasse 50/2/11  
A-1070 Vienna, Austria

Date the EUT was received: 26. August 2002

Annex: Photos of the test set-ups and the test subject

Client represented during the test by the following person(s): Mr. Florian Gruber

Place of test: PHOENIX TEST-LAB Blomberg

Date of test: 26. August to 20. September 2002

Test result: The requirements made in the test documents were fulfilled by the equipment under test.  
The complete test results are presented in the following.

Blomberg, 31. January 2003

*Blask*

---

Test Engineer: Raimund Blask


*B. Stein*

---

approved by authorized Engineer




Contents:	Page
<b>1 Operational states and test set-up</b>	<b>5</b>
<b>2 List of test modules and results</b>	<b>6</b>
2.1 Disturbance emission	6
2.2 EMC Immunity	7
<b>3 Test sequence and test results electromagnetic disturbances characteristics</b>	<b>9</b>
3.1 Radiated radio disturbance according to EN 60945 chapter 9.3 (E-field)	9
3.2 Radiated radio disturbance according to EN 60945 chapter 9.3 (magnetic. field)	17
3.3 Conducted radio disturbances according to EN 60945 chapter 9.2	22
<b>4 Test sequence and test results electromagnetic immunity characteristics</b>	<b>27</b>
4.1 Immunity test for high frequency electromagnetic fields according to EN 60945 chapter 10.4 and IEC 60945 Ed. 4 (additional frequency range up to 2 GHz)	27
4.2 Immunity test for conducted voltages, induced by RF-fields according to EN 60945 chapter 10.3	34
4.3 Immunity test for discharge of static electricity according to EN 60945 chapter 10.9	46
4.4 Immunity test for electrical fast transients (burst) according to EN 60945 chapter 10.5	49
4.5 Immunity test for electrical transients (surge) according to EN 60945 chapter 10.6	51
4.6 Conducted low frequency interference (harmonics and interharmonics) according to EN 60945 chapter 10.2	53
4.7 Power supply failure according to EN 60945 chapter 10.8	54
4.8 Power supply variations according to EN 60945 chapter 10.7	55
4.9 Excessive conditions according to EN 60945 chapter 5.2.3 (confusing of the DC-poles)	56
<b>5 Annex</b>	<b>57</b>

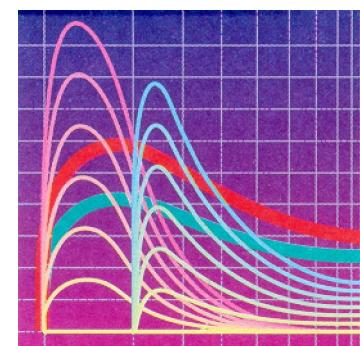


## 1 Operational states and test set-up

Two AIS transponder were connected coaxial via a rf-attenuator. Both transponder were operating in normal operation mode, communicating every 2 seconds with each other. The receive- and transmit-data of each transponder were monitored via the RS 422 display line with the help of a terminal program at an external PC and printed in a monitoring file to check the numbers and the context of data during the whole test-time.

Test set-up:

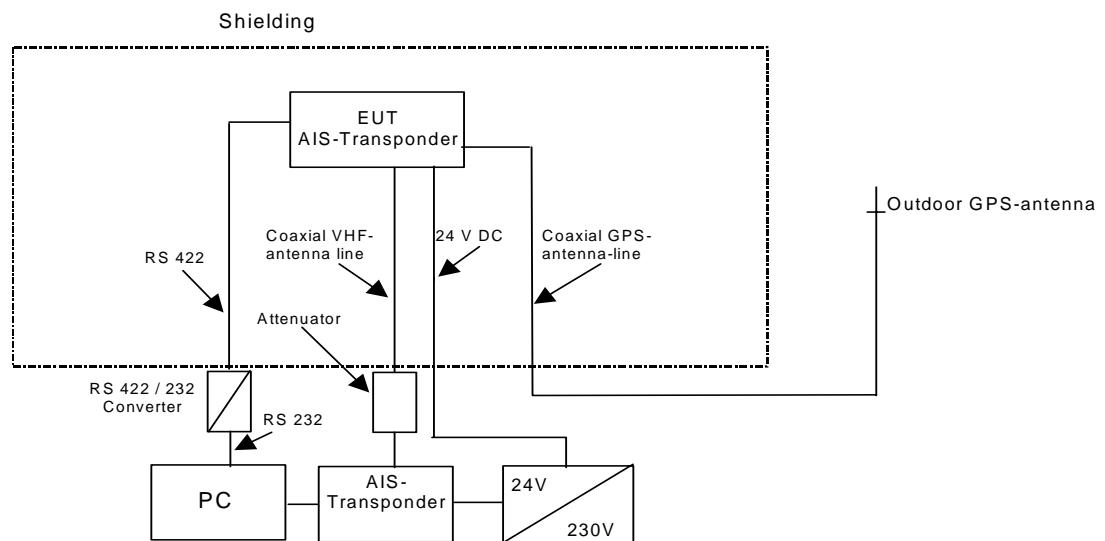

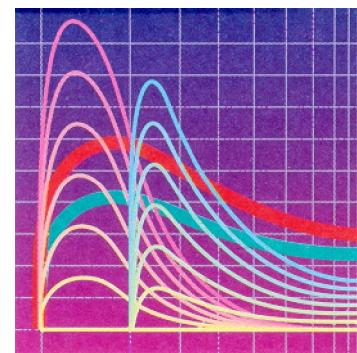


## 2 List of test modules and results

### 2.1 Disturbance emission

Radiated emission – Enclosure port				
Frequency range	Limit	Basic standard	Remark	Status
150kHz – 300kHz 300kHz – 30MHz	80 – 52 dB $\mu$ V/m in 3m 52 – 34 dB $\mu$ V/m in 3m	EN 60945 Chapter 9.3	H-field	fulfilled
30MHz – 156MHz 156MHz – 165MHz 165MHz – 1GHz	54 dB $\mu$ V/m in 3m 24 dB $\mu$ V/m in 3m 54 dB $\mu$ V/m in 3m	EN 60945 Chapter 9.3	E-field	fulfilled
Remark:		For frequencies from 150 kHz to 30 MHz measurements shall be made of the magnetic H-field. The receiver bandwidth in the frequency ranges 150 kHz to 30 MHz and 156 MHz to 165 MHz shall be 9 kHz, and in the frequency ranges 30 MHz to 156 MHz and 165 MHz to 1 GHz shall be 120 kHz.		

Conducted emission – Power supply ports				
Frequency range	Limit	Basic standard	Remark	Status
10kHz – 150kHz 150kHz – 350kHz 350kHz – 30MHz	96 – 50 dB $\mu$ V 60 – 50 dB $\mu$ V 50 dB $\mu$ V	EN 60945 Chapter 9.2	-	fulfilled
Remark:		The measuring bandwidth in the frequency range 10 kHz to 150 kHz shall be 200 Hz, and in the frequency range 150 kHz to 30 MHz shall be 9 kHz		

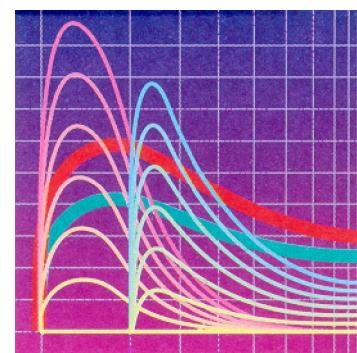


## 2.2 EMC Immunity

Definition of evaluation criterion according to EN 60945 chapter 10.1:


- A: No apparent impairment of function within the tolerance limits.
- B: Partial impairment of function, however self-regulating through e.g. automatic restart. Function must be restored within the tolerance limits after the test; a safe state must be guaranteed at all times.
- C: Partial impairment of function, however non self-regulating, e.g. manual start-up is necessary (Reset, Program start); a safe state must be guaranteed at all times.

Immunity – Enclosure port					
Environmental phenomena	Test specification and units	Basic standard	Remark	Performance criteria	Status
Electromagnetic fields	80 – 1000 MHz 10V/m; AM; 80%; 1kHz	EN 60945 Chapter 10.4	---	A	fulfilled
Electromagnetic fields	1000 - 2000 MHz 10V/m; AM; 80%; 1kHz	IEC 60945 Ed.4	---	A	fulfilled
Electrostatic discharge (ESD)	up to $\pm 6\text{kV}$ charging voltage for contact discharge	EN 60945 Chapter 10.9	---	B	fulfilled
Electrostatic discharge (ESD)	up to $\pm 8\text{kV}$ charging voltage for air discharge	EN 60945 Chapter 10.9	---	B	fulfilled

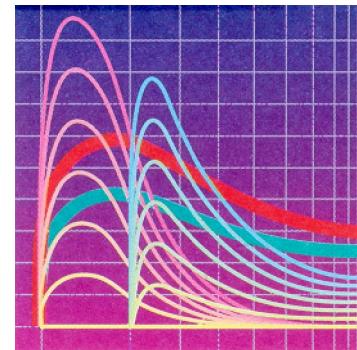

Immunity – Power supply ports, DC and AC					
Environmental phenomena	Test specification and units	Basic standard	Remark	Performance criteria	Status
Conducted high frequency interference	3V; AM; 80%; 1kHz 10kHz – 80MHz	EN 60945 Chapter 10.3	---	A	fulfilled
Conducted high frequency interference	10 V; AM; 80%; 1kHz 2 / 3 / 4 MHz, 6.2 / 8.2 / 12.6 MHz, 16.5 / 18.8 / 22 / 25 MHz	EN 60945 Chapter 10.3	---	A	fulfilled
Power supply failure	3 interruptions of 60s	EN 60945 Chapter 10.8	---	C	fulfilled
Power supply variations	$U_N + 20\%$ for 1.5s	EN 60945 Chapter 10.7	---	B	fulfilled
	$U_N - 20\%$ for 1.5s			B	fulfilled
Conducted low frequency interference (harmonics)	3V eff, max. 2W 50 kHz – 10 kHz	EN 60945 Chapter 10.2		B	fulfilled
Fast transients (Burst)	$\pm 2\text{kV}$ (peak) 5/50ns (Tr/Th) 5kHz repetition frequency	EN 60945 Chapter 10.5	---	B	fulfilled
Transients (Surge)	1,2 / 50 $\mu\text{s}$ up to $\pm 0.5\text{kV}$ line/line up to $\pm 1.0\text{kV}$ line/earth	EN 60945 Chapter 10.6	---	B	fulfilled

Immunity – Data, control and communications connections					
Environmental phenomena	Test specification and units	Basic standard	Remark	Performance criteria	Status
Conducted high frequency interference	3V; AM; 80%; 1kHz 10kHz – 80MHz	EN 60945 Chapter 10.3	---	A	fulfilled
Conducted high frequency interference	10 V; AM; 80%; 1kHz 2 / 3 / 4 MHz, 6.2 / 8.2 / 12.6 MHz, 16.5 / 18.8 / 22 / 25 MHz	EN 60945 Chapter 10.3	---	A	fulfilled
Fast transients (Burst)	$\pm 1\text{kV}$ (peak) 5/50ns (Tr/Th) 5kHz repetition frequency	EN 60945 Chapter 10.5	---	B	fulfilled
Transients (Surge)	1,2 / 50 $\mu\text{s}$ up to $\pm 0.5\text{kV}$ line/line up to $\pm 1.0\text{kV}$ line/earth	EN 60945 Chapter 10.6	---	B	-

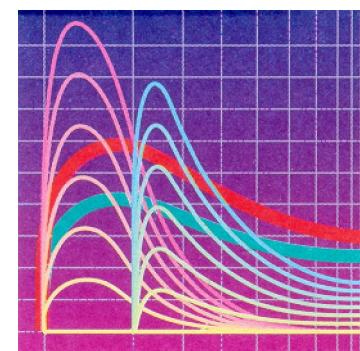



### 3 Test sequence and test results electromagnetic disturbances characteristics

#### 3.1 Radiated radio disturbance according to EN 60945 chapter 9.3 (E-field)

Test set-up:

- Table set-up
- The drawing below schematically shows the test set-up.
- Photos of the test set-up can also be referred to in the annex.

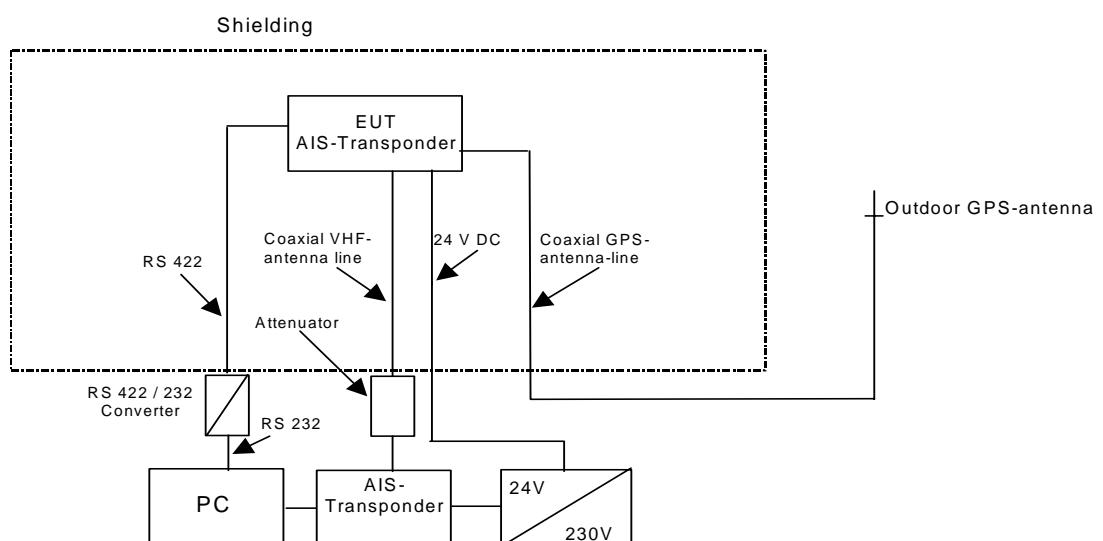

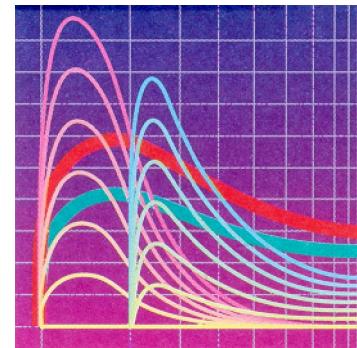


Test: The interfering field strength is measured in two stages. In the first non-standard stage, preliminary measurements are made in a fully anechoic chamber. Here the equipment under test is measured from various sides in normal fitted position. This procedure makes it possible to ascertain without the effect of external interference sources and without adjusting the antenna in height whether the test object is emitting interference at certain frequencies. In the second stage, the frequencies determined in the preliminary measurements are measured in compliance with the standard on a standard open area test site with a quasi-peak detector.

Measuring devices: AH-controller HD100 (PM-No. 480181)  
AH-antenna mast (PM-No. 480187/480188)  
AH-turntable (PM-No. 480186)  
Fully anechoic chamber (PM-No. 480190)  
Receiver ESI (PM-Nr. 480355)  
EMI softwarepackage ES-K1 (PM-No. 480111)  
Antenna Chase CBL 6112 (PM-No. 480185)  
DC filter 4\*60A (PM-No. 480209)  
Filter (X11) 0-4MHz; 100R; 2\*symm. Typ C110-E1 (PM-No. 480213)

Measuring records: The measuring records are presented on the following pages.

Test result: The requirements of the test documents were fulfilled.

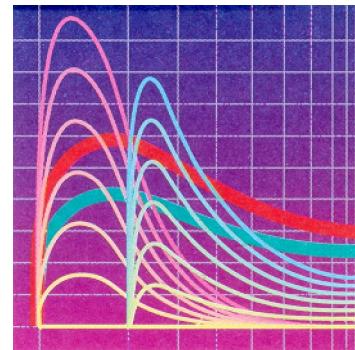

Title: Spurious emission measurement according EN60945  
 EUT: AIS-Transponder  
 Manufacturer: Nauticast  
 Operating Condition: Normal operation mode  
 Test site: fully anechoic chamber M20; PHOENIX TEST LAB GmbH  
 Operator: R. Blask


**Scantable for the preliminary measurement: EN60945 ESI**

Unit: dB $\mu$ V/m

Detector: Modus:

Curve1: MaxPeak ClearWrite  
 Curve2: Average ClearWrite

Subrange	1	2	3	4	5
Start frequency	150.0 kHz	30.0 MHz	156.0 MHz	165.0 MHz	
Stop frequency	30.0 MHz	156.0 MHz	165.0 MHz	2.0 GHz	
Increment	6.0 kHz	80.0 kHz	6.0 kHz	80.0 kHz	
Measurement time	10.0 ms	10.0 ms	10.0 ms	10.0 ms	
IF-bandwidth	9 kHz	120 kHz	9 kHz	120 kHz	
Preamplifier	20 dB	20 dB	20 dB	20 dB	
RF-attenuation	0 dB	0 dB	0 dB	0 dB	
Ref.-level	-30.0 dBm	-30.0 dBm	-30.0 dBm	-30.0 dBm	
Min. RF-attenuation	0 dB	0 dB	0 dB	0 dB	
IF. attenuation					
Autorange	On	On	On	On	
Demodulation	FM	FM	FM	FM	
Receiver	ESI7	ESI7	ESI7	ESI7	
Signal path	None	RF3 CP1	RF3 CP1	RF1 CP1	
Probe transducer	_HFH2-Z2 (dB $\mu$ V/m) 98	_CBL6112B	_CBL6112B	_CBL6112B	
System transducer	None	RF3 CP1	RF3 CP1	RF1 CP1	
Scan-mode	Lin	Lin	Lin	Lin	
Tracking-gen.					
Input	2DC	1	1	1	

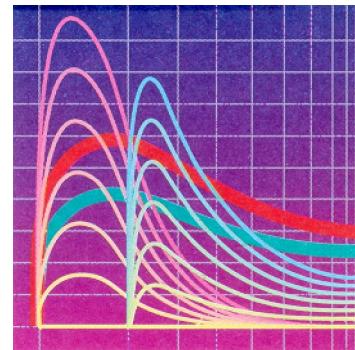

**Scantable for the subsequent measurement: EN60945 ESI\_fin**


Unit: dB $\mu$ V/m

Detector: Mode:

Curve1: MaxPeak ClearWrite  
 Curve2: Average ClearWrite

Subrange	1	2	3	4	5
Start frequency	150.0 kHz	30.0 MHz	156.0 MHz	165.0 MHz	1.0 GHz
Stop frequency	30.0 MHz	156.0 MHz	165.0 MHz	1.0 GHz	2.0 GHz
Increment	600.0 Hz	8.0 kHz	600.0 Hz	8.0 kHz	8.0 kHz
Measurement time	10.0 ms	10.0 ms	10.0 ms	10.0 ms	10.0 ms
IF-bandwidth	9 kHz	120 kHz	9 kHz	120 kHz	120 kHz
Preamplifier	20 dB	20 dB	20 dB	20 dB	20 dB
RF-attenuation	0 dB	0 dB	0 dB	0 dB	0 dB
Ref.-level	-30.0 dBm	-30.0 dBm	-30.0 dBm	-30.0 dBm	-30.0 dBm
Min. RF-attenuation	0 dB	0 dB	0 dB	0 dB	0 dB
IF. attenuation					
Autorange	On	On	On	On	On
Demodulation	FM	FM	FM	FM	FM
Receiver	ESI7	ESI7	ESI7	ESI7	ESI7
Signal path	None	RF1 CP1	RF1 CP1	RF1 CP1	RF1 CP1
Probe transducer	_HFH2-Z2 (dB $\mu$ V/m) 98	_CBL6112B	_CBL6112B	_CBL6112B	_CBL6112B
System transducer	None	RF1 CP1	RF1 CP1	RF1 CP1	RF1 CP1
Scan-mode	Lin	Lin	Lin	Lin	Lin
Tracking-gen.					
Input	2DC	1	1	1	1

The measurement time with the quasi-peak measuring detector is 1 second.

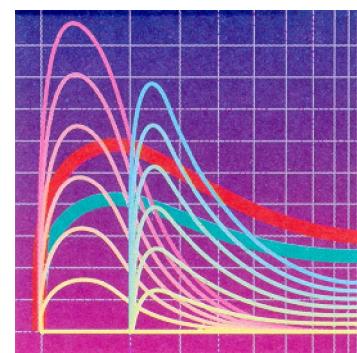


**PHOENIX  
TEST-LAB**

The limit line and measurement curve shown in the diagram below refer to the preliminary measurements. Here, it must be noted that because of the reduced measuring distance and because of the floor absorbers, the measured values do not comply with the values of the above mentioned standard; they only serve as orientation in determining which frequencies must be measured on the open area test site.

The limit line is achieved with the applied standard by converting to a 3m measurement distance (+10 dB) and the correction for the free space in which in the "worst case" the reflected floor wave is missing entirely (-6dB). Therefore 4dB is added to the limit line of the standard concerned.


The curves in the diagram only represent the maximum measured value for each frequency point of all preliminary measurements, which were carried out with the EUT in various positions.

The top measured curve represents the peak measurement. The measured points marked with x are frequency points for which later measurements with a quasi-peak detector were carried out. These values are indicated in the following table. The bottom measured curve represents average values, which are only required for control purposes.

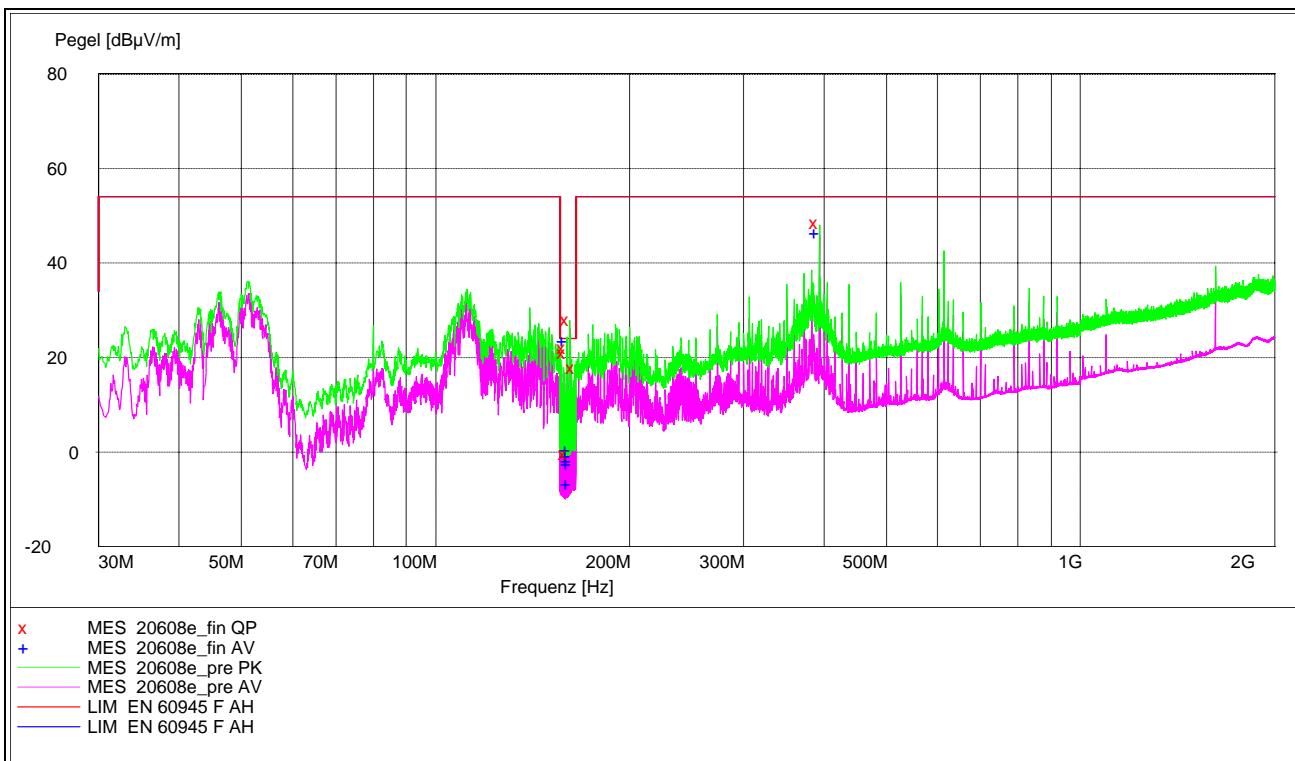

Data record name: 20608e

of 2 September 2002

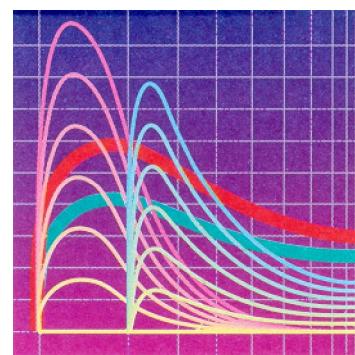

### Result measured with the quasi-peak detector:

(These values are marked in the above diagram by x)


Frequency MHz	Level dB $\mu$ V/m	Transducer dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Azimuth deg	Polarisation
159.996000	21.10	9.9	24.0	2.9	150.0	44.00	VERTICAL
160.002000	22.20	9.9	24.0	1.8	150.0	111.00	HORIZONTAL
160.824000	-0.30	9.9	24.0	24.3	150.0	128.00	HORIZONTAL
161.772000	28.10	9.8	24.0	-4.1	150.0	94.00	HORIZONTAL
165.000000	18.00	9.7	24.0	6.0	150.0	101.00	HORIZONTAL
394.200000	48.50	16.5	54.0	5.5	150.0	0.00	VERTICAL

Data record name: 20608e\_fin QP

of 2. Sept. 2002

In this case it was necessary to carry out subsequent measurements because at some frequency points a value was above the Qualify limit curve during the preliminary measurements.

The results from the standard subsequent measurements on the open area test site are presented in the following.

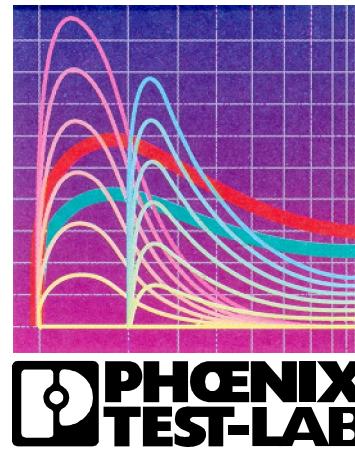


Title: Final measurement at 3 m distance  
 EMI-Receiver E5A1 from ROHDE & SCHWARZ  
 EUT: X-Pack DS  
 Manufacturer: Nauticast  
 Operating Condition: Normal operation mode  
 Test site: PHOENIX TEST-LAB Blomberg; open area test site  
 Operator: R. Blask

**Scantable for the subsequent measurement: EN60945 M6 E CP1\_fin**

Unit: dB $\mu$ V/m  
 Detector: Mode:  
 Curve1: MaxPeak ClearWrite  
 Curve2: Average ClearWrite


Subrange	1	2	3	4	5
Start frequency	30.0 MHz	156.0 MHz	165.0 MHz		
Stop frequency	156.0 MHz	165.0 MHz	1.0 GHz		
Increment	12.0 kHz	1.0 kHz	12.0 kHz		
Measurement time	100.0 ms	100.0 ms	100.0 ms		
IF-bandwidth	120 kHz	9 kHz	120 kHz		
Preamplifier	10 dB	10 dB	10 dB		
RF-attenuation	0 dB	0 dB	0 dB		
Ref.-level	-50.0 dBm	-50.0 dBm	-50.0 dBm		
Min. RF-attenuation	0 dB	0 dB	0 dB		
IF. attenuation					
Autorange	Off	Off	Off		
Demodulation	AM	AM	AM		
Receiver	ESAI	ESAI	ESAI		
Signal path	60945-Feld FF	60945-Feld FF	60945-Feld FF		
Probe transducer	_CBL 6111A	_CBL 6111A	_CBL 6111A		
System transducer	FF CP1 60945	FF CP1 60945	FF CP1 60945		
Scan-mode	Lin	Lin	Lin		
Tracking-gen.	Off	Off	Off		
Input	2DC	2DC	2DC		

The measurement time with the quasi-peak measuring detector is 1 second.

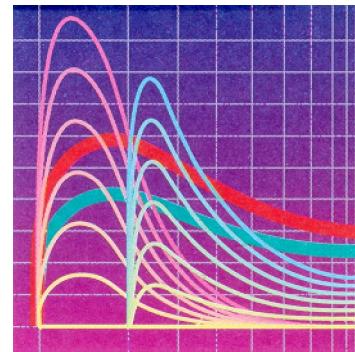

**PHOENIX  
TEST-LAB**

The measured points and the limit line in the following diagram refer to the standard measurement of the emitted interference in compliance with the above mentioned standard. The measured points marked with x are the measured results of the standard subsequent measurement on the open area test site.

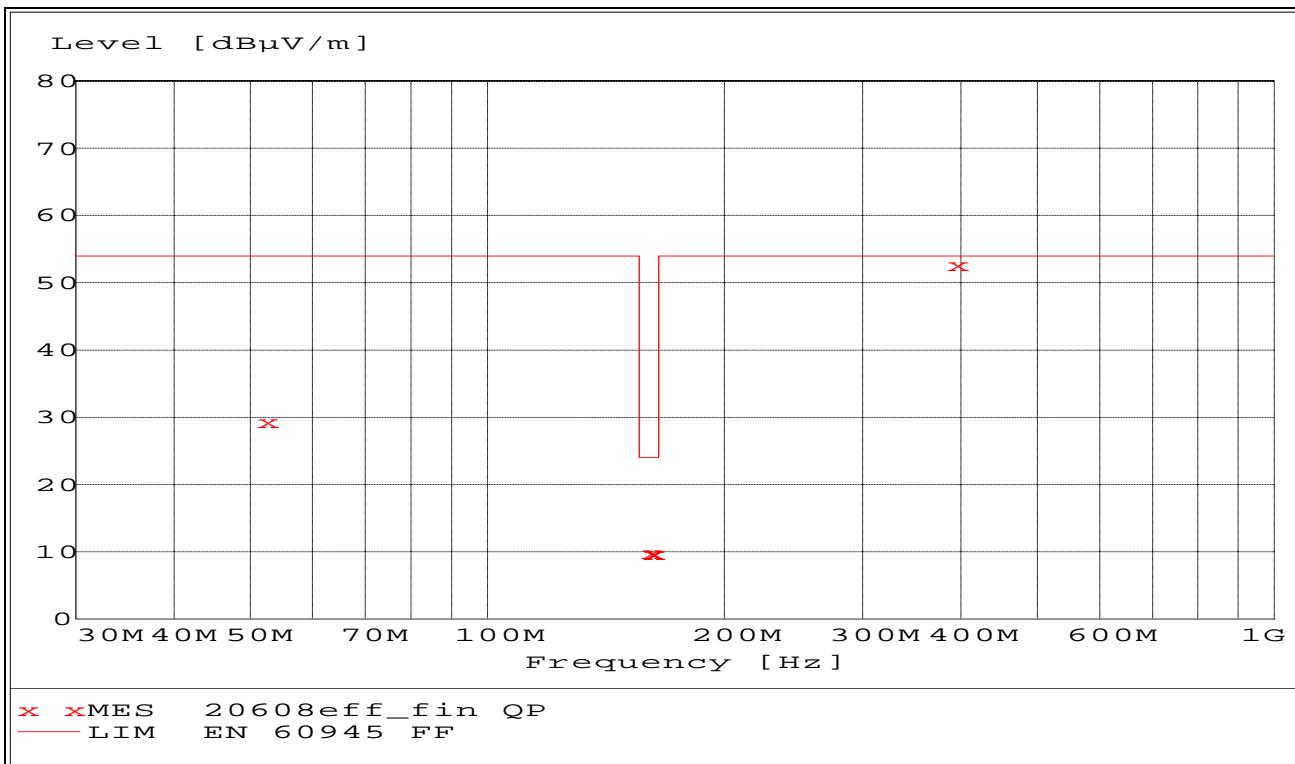

Data record name: 20608eff

of 02.09.02

The results of the standard subsequent measurement on the open area test site are indicated in the table below. The limits as well as the measured results (levels) refer to the above mentioned standard while taking account of the specified requirements for a 10m measuring distance.


### Result measured with the quasi-peak detector:

(These values are marked in the above diagram by x)

Frequency MHz	Level dB $\mu$ V/m	Transducer dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Azimuth deg	Polarisation
52.230000	29.40	8.8	54.0	24.6	101.0	241.00	VERTICAL
160.825000	9.80	12.8	24.0	14.2	148.0	16.00	VERTICAL
161.750000	9.70	12.7	24.0	14.3	121.0	334.00	VERTICAL
162.060000	9.70	12.7	24.0	14.3	101.0	314.00	VERTICAL
162.235000	9.70	12.7	24.0	14.3	272.0	316.00	VERTICAL
394.200000	52.70	19.4	54.0	1.3	103.0	44.00	VERTICAL

Data record name: 20608eff\_fin QP

of 02.09.02

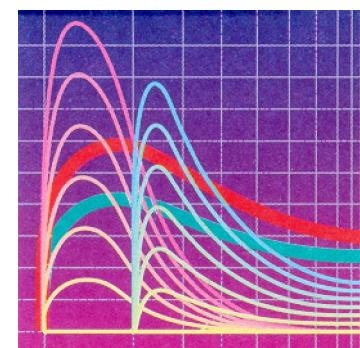



**PHOENIX  
TEST-LAB**

### 3.2 Radiated radio disturbance according to EN 60945 chapter 9.3 (magnetic. field)

Test set-up:

- Table set-up
- The drawing below schematically shows the test set-up.
- Photos of the test set-up can also be referred to in the annex.

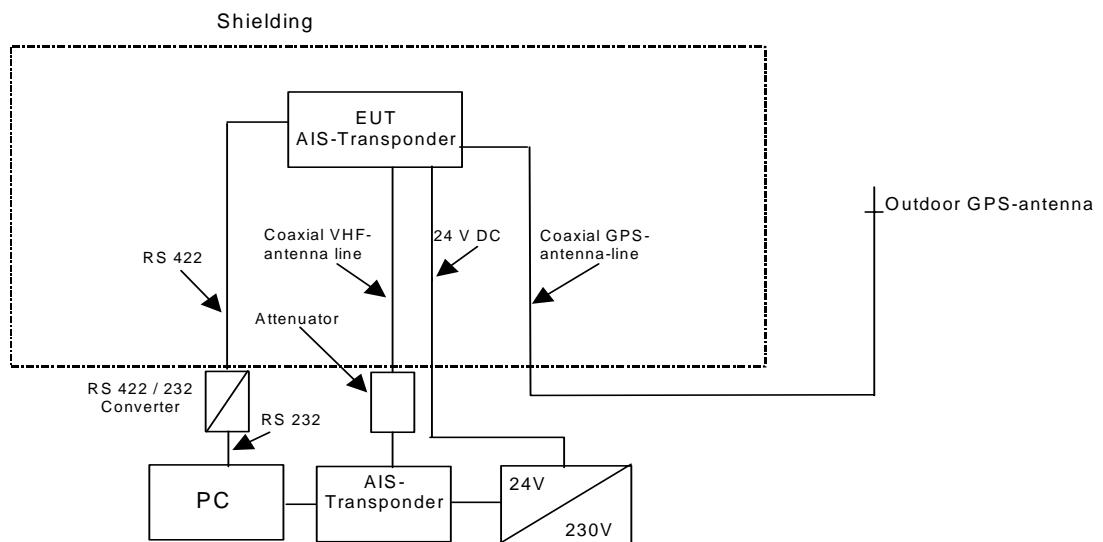

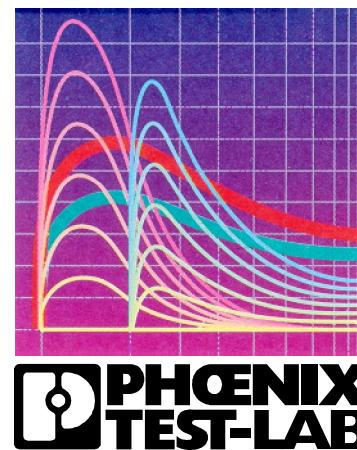


Test: The interfering field strength is measured in two stages. In the first non-standard stage, preliminary measurements are made in a fully anechoic chamber. Here the equipment under test is measured from various sides in normal fitted position. This procedure makes it possible to ascertain without the effect of external interference sources and without adjusting the antenna in height whether the test object is emitting interference at certain frequencies. In the second stage, the frequencies determined in the preliminary measurements are measured in compliance with the standard on a standard open area test site with a quasi-peak detector.

Measuring devices: AH-controller HD100 (PM-No. 480181)  
AH-antenna mast (PM-No. 480187/480188)  
AH-turntable (PM-No. 480186)  
fully anechoic chamber (PM-No. 480190)  
receiver ESI (PM-Nr. 480355)  
EMI softwarepackage ES-K1 (PM-No. 480111)  
FF-controller HD 100 (PM-No. 480139)  
FF-antenna mast (PM-No. 480086)  
FF-turntable (PM-No. 480087)  
open area test site (PM-No. 480085)  
relays switch unit RSU (PM-No. 480077)  
receiver ESAI + Display (PM-Nr. 480025, PM-Nr. 480026)  
Antenna R+S Loop antenna HFH2-Z2 (PM-Nr. 480059)  
DC filter 4\*60A (PM-No. 480209)  
filter (X11) 0-4MHz; 100R; 2\*symm. Type C110-E1 (PM-No. 480213)

Measuring records: The measuring records are presented on the following pages.

Test result: The requirements of the test documents were fulfilled.

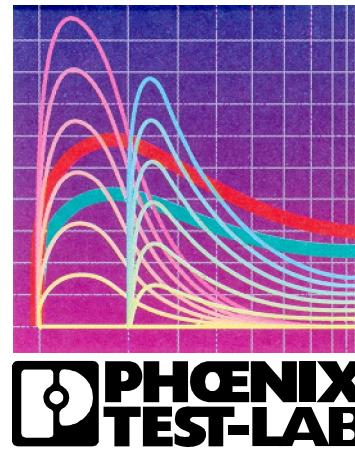

Title: Spurious emission measurement according EN60945  
 EUT: AIS-Transponder  
 Manufacturer: Nauticast  
 Operating Condition: Normal operation mode  
 Test site: fully anechoic chamber M20; PHOENIX TEST LAB GmbH  
 Operator: R. Blask


**Scantable for the preliminary measurement: EN60945 ESI**

Unit: dB $\mu$ V/m

Detector: Modus:

Curve1: MaxPeak ClearWrite  
 Curve2: Average ClearWrite

Subrange	1	2	3	4	5
Start frequency	150.0 kHz	30.0 MHz	156.0 MHz	165.0 MHz	
Stop frequency	30.0 MHz	156.0 MHz	165.0 MHz	2.0 GHz	
Increment	6.0 kHz	80.0 kHz	6.0 kHz	80.0 kHz	
Measurement time	10.0 ms	10.0 ms	10.0 ms	10.0 ms	
IF-bandwidth	9 kHz	120 kHz	9 kHz	120 kHz	
Preamplifier	20 dB	20 dB	20 dB	20 dB	
RF-attenuation	0 dB	0 dB	0 dB	0 dB	
Ref.-level	-30.0 dBm	-30.0 dBm	-30.0 dBm	-30.0 dBm	
Min. RF-attenuation	0 dB	0 dB	0 dB	0 dB	
IF. attenuation					
Autorange	On	On	On	On	
Demodulation	FM	FM	FM	FM	
Receiver	ESI7	ESI7	ESI7	ESI7	
Signal path	None	RF3 CP1	RF3 CP1	RF1 CP1	
Probe transducer	_HFH2-Z2 (dB $\mu$ V/m) 98	_CBL6112B	_CBL6112B	_CBL6112B	
System transducer	None	RF3 CP1	RF3 CP1	RF1 CP1	
Scan-mode	Lin	Lin	Lin	Lin	
Tracking-gen.					
Input	2DC	1	1	1	

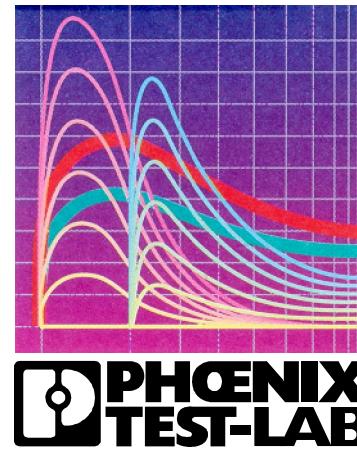

**Scantable for the subsequent measurement: EN60945 ESI\_fin**


Unit: dB $\mu$ V/m

Detector: Mode:

Curve1: MaxPeak ClearWrite  
 Curve2: Average ClearWrite

Subrange	1	2	3	4	5
Start frequency	150.0 kHz	30.0 MHz	156.0 MHz	165.0 MHz	1.0 GHz
Stop frequency	30.0 MHz	156.0 MHz	165.0 MHz	1.0 GHz	2.0 GHz
Increment	600.0 Hz	8.0 kHz	600.0 Hz	8.0 kHz	8.0 kHz
Measurement time	10.0 ms	10.0 ms	10.0 ms	10.0 ms	10.0 ms
IF-bandwidth	9 kHz	120 kHz	9 kHz	120 kHz	120 kHz
Preamplifier	20 dB	20 dB	20 dB	20 dB	20 dB
RF-attenuation	0 dB	0 dB	0 dB	0 dB	0 dB
Ref.-level	-30.0 dBm	-30.0 dBm	-30.0 dBm	-30.0 dBm	-30.0 dBm
Min. RF-attenuation	0 dB	0 dB	0 dB	0 dB	0 dB
IF. attenuation					
Autorange	On	On	On	On	On
Demodulation	FM	FM	FM	FM	FM
Receiver	ESI7	ESI7	ESI7	ESI7	ESI7
Signal path	None	RF1 CP1	RF1 CP1	RF1 CP1	RF1 CP1
Probe transducer	_HFH2-Z2 (dB $\mu$ V/m) 98	_CBL6112B	_CBL6112B	_CBL6112B	_CBL6112B
System transducer	None	RF1 CP1	RF1 CP1	RF1 CP1	RF1 CP1
Scan-mode	Lin	Lin	Lin	Lin	Lin
Tracking-gen.					
Input	2DC	1	1	1	1

The measurement time with the quasi-peak measuring detector is 1 second.

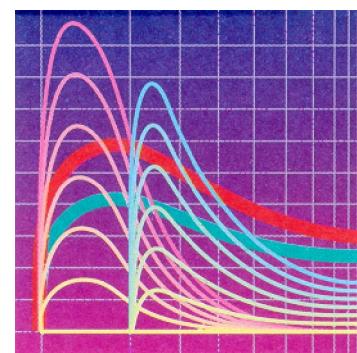


The limit line and measurement curve shown in the diagram below refer to the preliminary measurements. Here, it must be noted that because of the reduced measuring distance and because of the floor absorbers, the measured values do not comply with the values of the above mentioned standard; they only serve as orientation in determining which frequencies must be measured on the open area test site.

The limit line is achieved with the applied standard by converting to a 3m measurement distance (+10 dB) and the correction for the free space in which in the "worst case" the reflected floor wave is missing entirely (-6dB). Therefore 4dB is added to the limit line of the standard concerned.

The curves in the diagram only represent the maximum measured value for each frequency point of all preliminary measurements, which were carried out with the EUT in various positions.


The top measured curve represents the peak measurement. The measured points marked with x are frequency points for which later measurements with a quasi-peak detector were carried out. These values are indicated in the following table. The bottom measured curve represents average values, which are only required for control purposes.

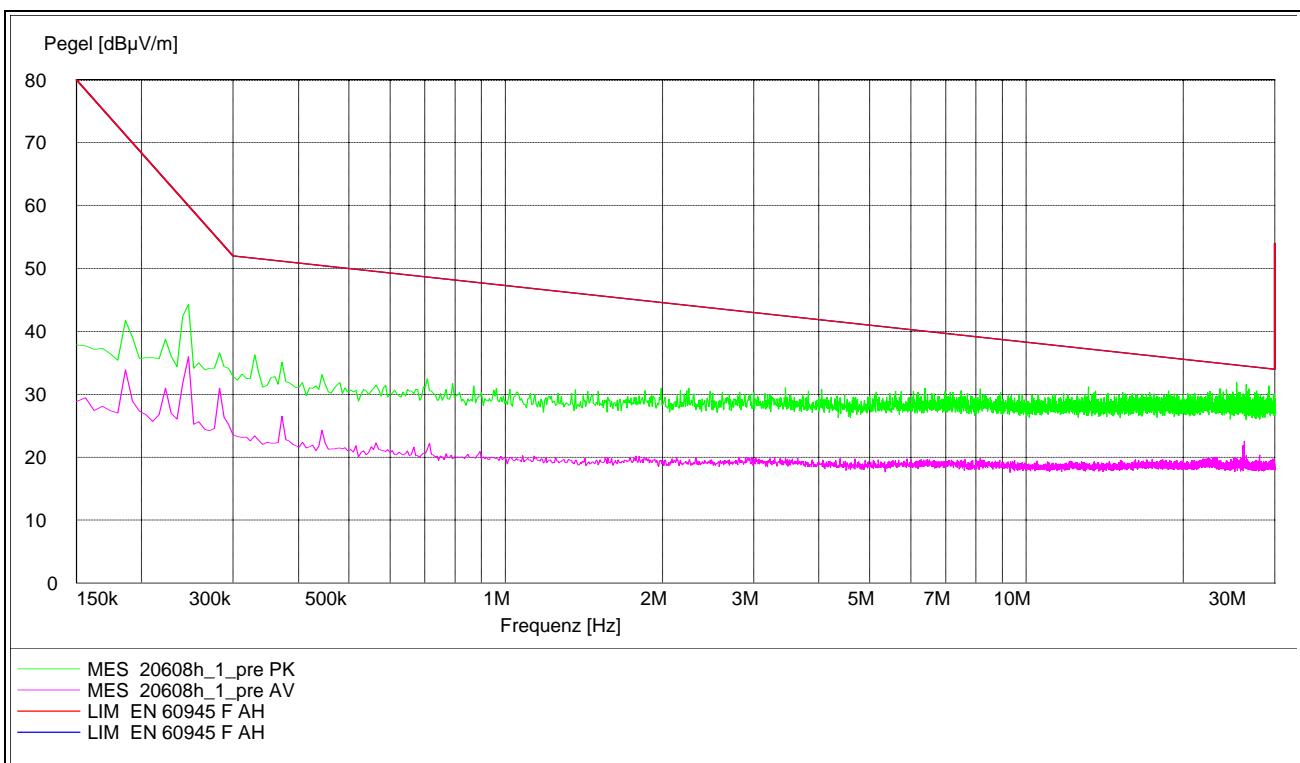

Data record name: 20608h\_1

of 02.09.02


In this case it was not necessary to carry out subsequent measurements because at no frequency was a value above the noise of the system

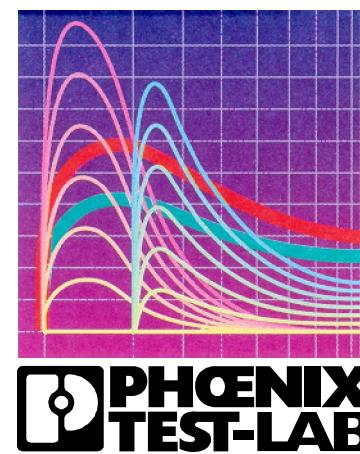

### 3.3 Conducted radio disturbances according to EN 60945 chapter 9.2

Test set-up:

- Table set-up
- The drawing below schematically shows the test set-up.
- Photos of the test set-up can also be referred to in the annex.

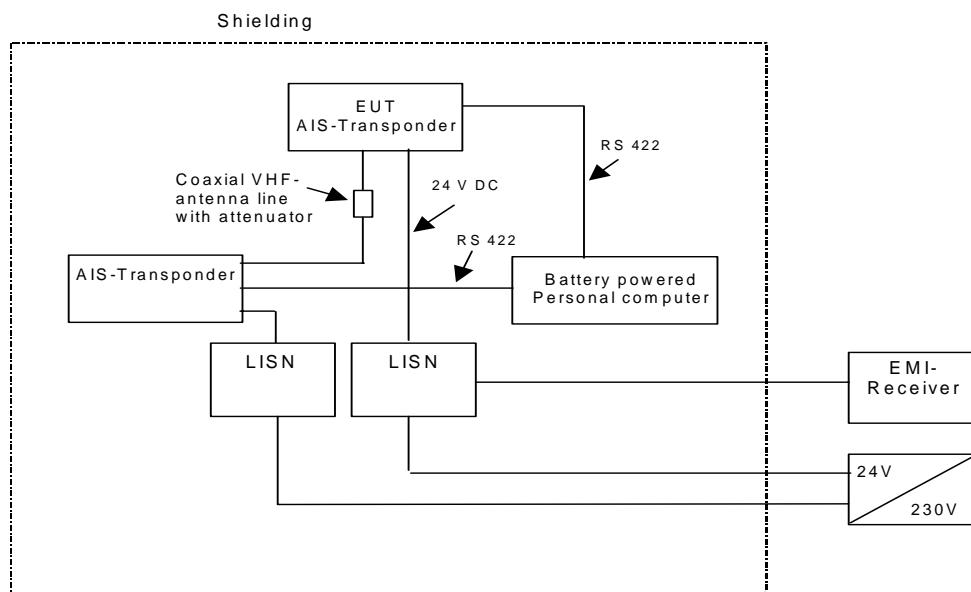

Measuring devices:


- Shielded chamber (PM-No. 480088)
- ESAI test receiver + display (PM-No. 480025, PM-No. 480026)
- EMI ES-K1 software package (PM No. 480111)
- LISN NSLK8128 (PM-No. 480058)
- DC filter (PM-No. 480099)

Measuring records:

The measuring records are presented on the following pages.

Test results:

The requirements of the test documents were fulfilled.

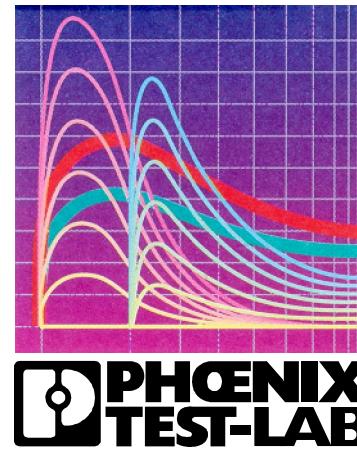


Title: Conducted Spurious Emission Measurement  
 according EN 60945  
 EUT: AIS Transponder  
 Manufacturer: Nauticast  
 Operating condition: Communication with 2. AIS-Transponder  
 Test site: PHOENIX TEST-LAB Blomberg M4  
 Operator: R. Blask  
 Test Specification: modified power supply  
 Comment: with disconnected GPS Antenna

**Scantable for the preliminary measurement: EN60945V**

Unit: dB $\mu$ V  
 Detector: Mode:  
 Curve1: MaxPeak ClearWrite  
 Curve2: Average ClearWrite

Subrange	1	2	3	4	5
Start frequency	10.0 kHz	150.0 kHz			
Stop frequency	150.0 kHz	30.0 MHz			
Increment	150.0 Hz	6.0 kHz			
Measurement time	50.0 ms	50.0 ms			
IF-bandwidth	200 Hz	9 kHz			
Preamplifier	Off	Off			
RF-attenuation	20 dB	0 dB			
Ref.-level	-30.0 dBm	-50.0 dBm			
Min. RF-attenuation	30 dB	30 dB			
IF. attenuation					
Autorange	On	On			
Demodulation	AM	AM			
Receiver	ESAI	ESAI			
Signal path	Tisch	Tisch			
Probe transducer	_NSLK	_NSLK			
System transducer	SK Tisch 01/02	SK Tisch 01/02			
Scan-mode	Lin	Lin			
Tracking-gen.	Off	Off			
Input	1DC	1DC			

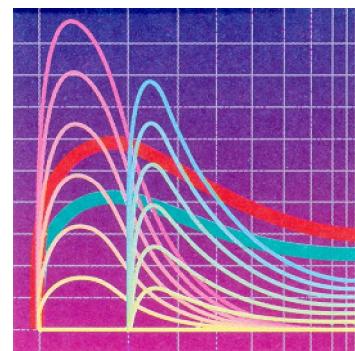

**Scantable for the subsequent measurement: EN60945V\_fin**


Unit: dB $\mu$ V

Detector: Mode:

Curve1: MaxPeak ClearWrite  
 Curve2: Average ClearWrite

Subrange	1	2	3	4	5
Start frequency	10.0 kHz	150.0 kHz			
Stop frequency	150.0 kHz	30.0 MHz			
Increment	20.0 Hz	900.0 Hz			
Measurement time	100.0 ms	100.0 ms			
IF-bandwidth	200 Hz	9 kHz			
Preamplifier	Off	Off			
RF-attenuation	20 dB	20 dB			
Ref.-level	-50.0 dBm	-50.0 dBm			
Min. RF-attenuation	20 dB	20 dB			
IF. attenuation					
Autorange	On	On			
Demodulation	AM	AM			
Receiver	ESAI	ESAI			
Signal path	Tisch	Tisch			
Probe transducer	_NSLK	_NSLK			
System transducer	SK Tisch 01/02	SK Tisch 01/02			
Scan-mode	Lin	Lin			
Tracking-gen.	Off	Off			
Input	1DC	1DC			


The measurement time with the quasi-peak measuring detector is 5 seconds.

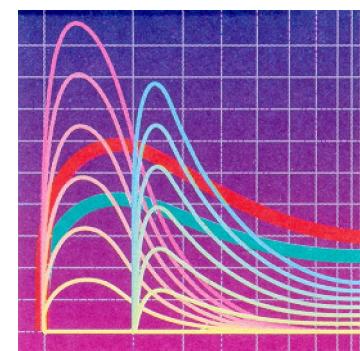

**PHOENIX  
TEST-LAB**


The curves in the diagram only represent for each frequency point the maximum measured value of all preliminary measurements which were made for each power supply line.

The top measured curve represents the peak measurement and the bottom measured curve the average measurement. The quasi-peak measured points are marked by x and the average measured points by +.

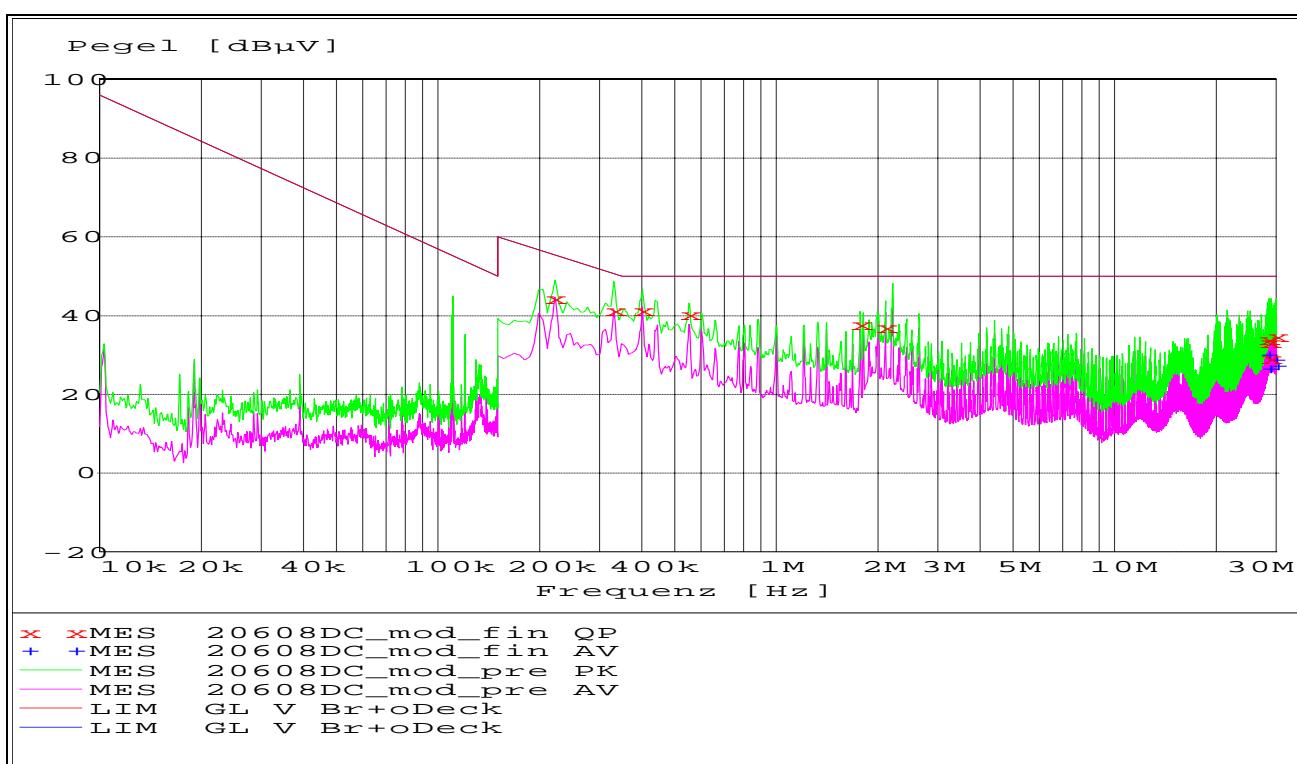

Data record name: 20608DC\_mod

of 20.09.02

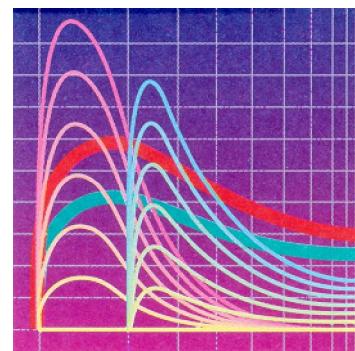

### Result measured with the quasi-peak detector:

(These values are marked in the above diagram by x)

Frequency MHz	Level dB $\mu$ V	Transducer dB	Limit dB $\mu$ V	Margin dB	Phase	PE
0.220200	44.30	0.6	55.5	11.2	+	GND
0.330900	41.40	0.7	50.7	9.2	+	GND
0.400200	41.30	0.6	50.0	8.7	+	GND
0.550500	40.20	0.7	50.0	9.8	+	GND
1.770000	37.70	0.7	50.0	12.3	-	GND
2.098500	37.10	0.7	50.0	12.9	-	GND
28.373100	34.00	3.1	50.0	16.0	+	GND
28.574700	33.20	3.1	50.0	16.8	+	GND
28.774500	29.10	3.2	50.0	20.9	+	GND
29.984100	34.70	3.2	50.0	15.3	+	GND

Data record name: 20608DC\_mod\_fin QP

of 20.09.02


### Result measured with the average detector:

(These values are marked in the above diagram by +)

Frequency MHz	Level dB $\mu$ V	Transducer dB	Limit dB $\mu$ V	Margin dB	Phase	PE
28.374900	30.00	3.1	50.0	20.0	+	GND
28.575600	26.50	3.1	50.0	23.5	+	GND
29.784300	29.00	3.2	50.0	21.0	+	GND
29.985000	27.40	3.2	50.0	22.6	+	GND

Data record name: 20608DC\_mod\_fin AV

of 20.09.02

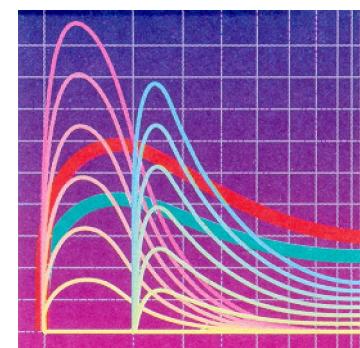


## 4 Test sequence and test results electromagnetic immunity characteristics

### 4.1 Immunity test for high frequency electromagnetic fields according to EN 60945 chapter 10.4 and IEC 60945 Ed. 4 (additional frequency range up to 2 GHz)


Test set-up:

- Table set-up
- The drawing below schematically shows the test set-up.
- Photos of the test set-up can also be referred to in the annex.
- The transmitting antenna is set at 1.5m above the floor.

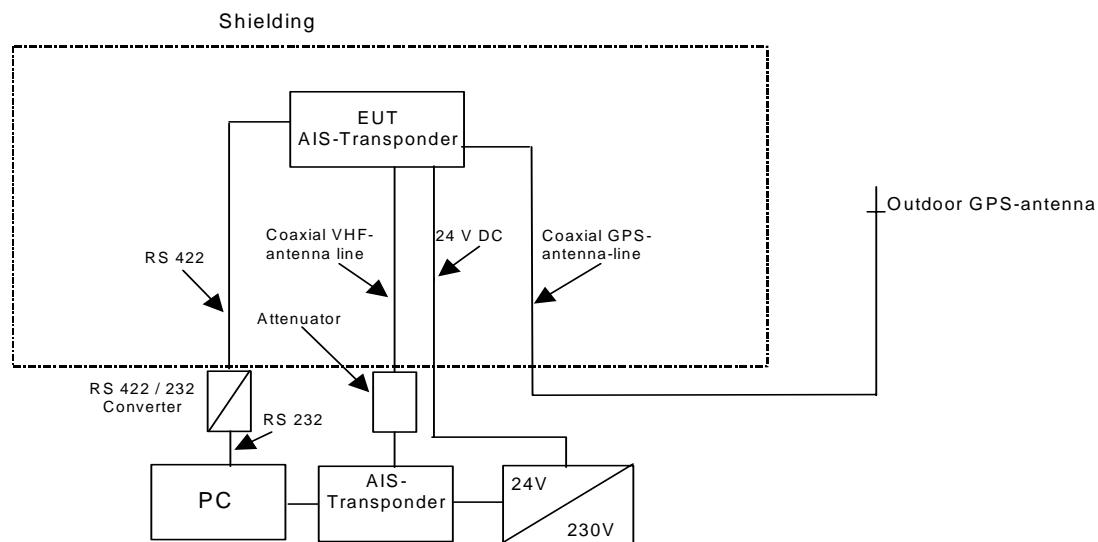


Monitoring of EUT:

The output signals were checked by the monitoring system outside the anechoic chamber.

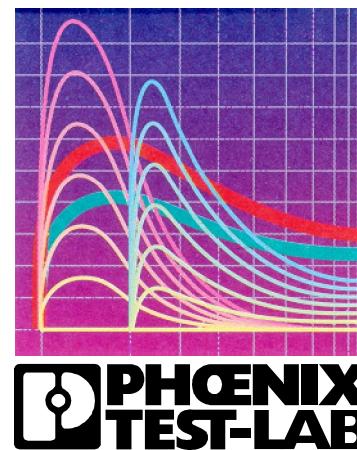

Measuring devices:

- AH-controller HD100 (PM-No. 480181)
- AH-turtable (PM-No. 480186)
- AH-antenna mast (PM-No. 480187, 480188)
- Fully anechoic chamber (PM-No. 480190)
- Power amplifier AR 1000L M20 (PM-No. 480198)
- Power amplifier AR 500W1000M5 (PM-No. 480199)
- Power amplifier AR 200T1G2 (PM-No. 480200)
- Power amplifier AR 200T2G4 (PM-No. 480201)
- Signal generator SME06 (PM-No. 480174)
- Power meter NRVD (PM-No. 480176, 480177)
- Insertion unit URV5-Z2 (PM-No. 480191, 480192)
- Terminating impedance RNB (PM-No. 480062, 480063)
- Power probe NRV-Z2 (PM-No. 480193/480194)
- Relays switch unit RSU (PM-No. 480175)
- Amplifier interface SCIU (PM-No. 480178)
- Control unit FM2000 (PM-No. 480173)
- Field sensor FP2000 (PM-No. 480195)
- Field sensor FP2080 (PM-No. 480196)
- EMS softwarepackage EMS-K1 (PM-No. 480222)
- Horn antenna EMCO 3109 (PM-No. 480082)
- Log.per.antenna AT1080 (PM-No. 480189)
- DC filter 4\*60A (PM-No. 480209)
- Filter (X11) 0-4MHz; 100R; 2\*symm. Type C110-E1 (PM-No. 480213)

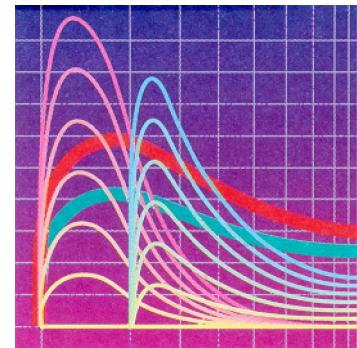

Measuring records:


The tests in the table below were carried out.

Date of test:	4 Sept. 2002			
Ambient conditions:	55% Frei, 19°C			
Test level:	80-2000MHz, 10V/m, AM, 400 Hz, 80%			
Increment:	log 1%			
Dwell time:	$\geq 3s$			
Distance antenna/ test object	Polarisation	Radiation direction	EUT reaction	Result
3m	vertical	0 °	No reaction detected	A
3m	vertical	90 °	No reaction detected	A
3m	vertical	180 °	No reaction detected	A
3m	vertical	270 °	No reaction detected	A
3m	horizontal	0 °	No reaction detected	A
3m	horizontal	90 °	No reaction detected	A
3m	horizontal	180 °	No reaction detected	A
3m	horizontal	270 °	No reaction detected	A



Test results: The requirements of the test documents were fulfilled.

The curves in the following graphs are representative of the entire frequency range:


- The 'Transducerlevel' curve represents the power transmitted by the antenna. This power profile must be taken as the basis of any subsequent test.
- The 'Field' curve shows the measured field strength corresponding with polarisation of the transmitting antenna. This curve only serves to prove that a field was produced. Refer to the Annex for a photo of the position of the field probe in relation to the equipment under test.

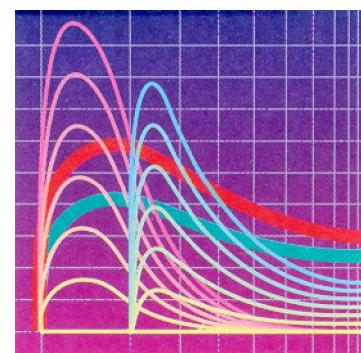



**PHOENIX**  
**TEST-LAB**

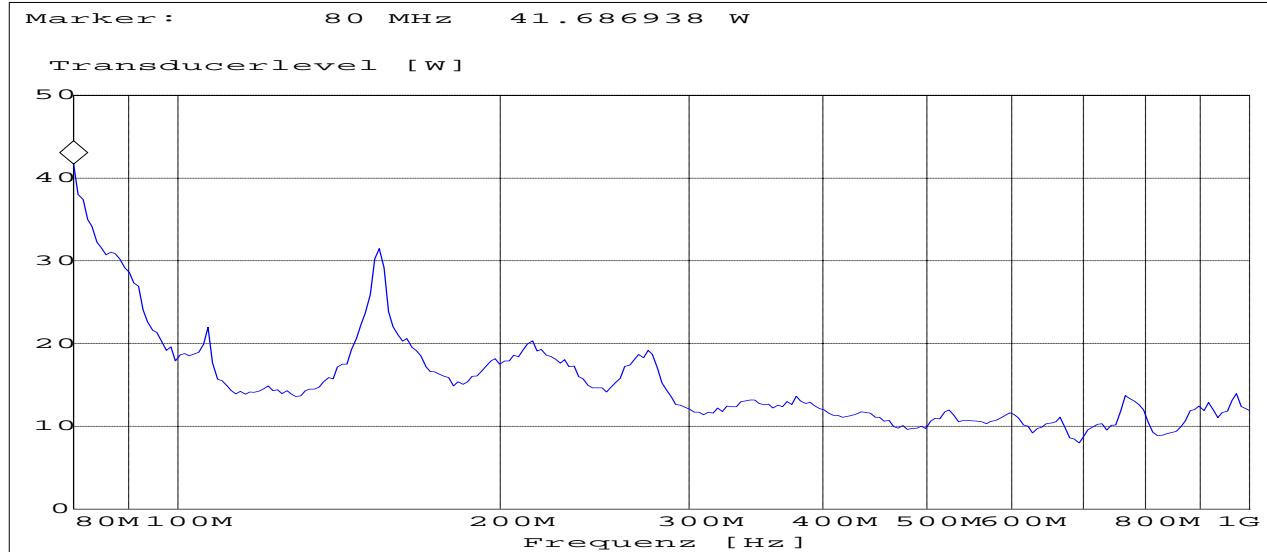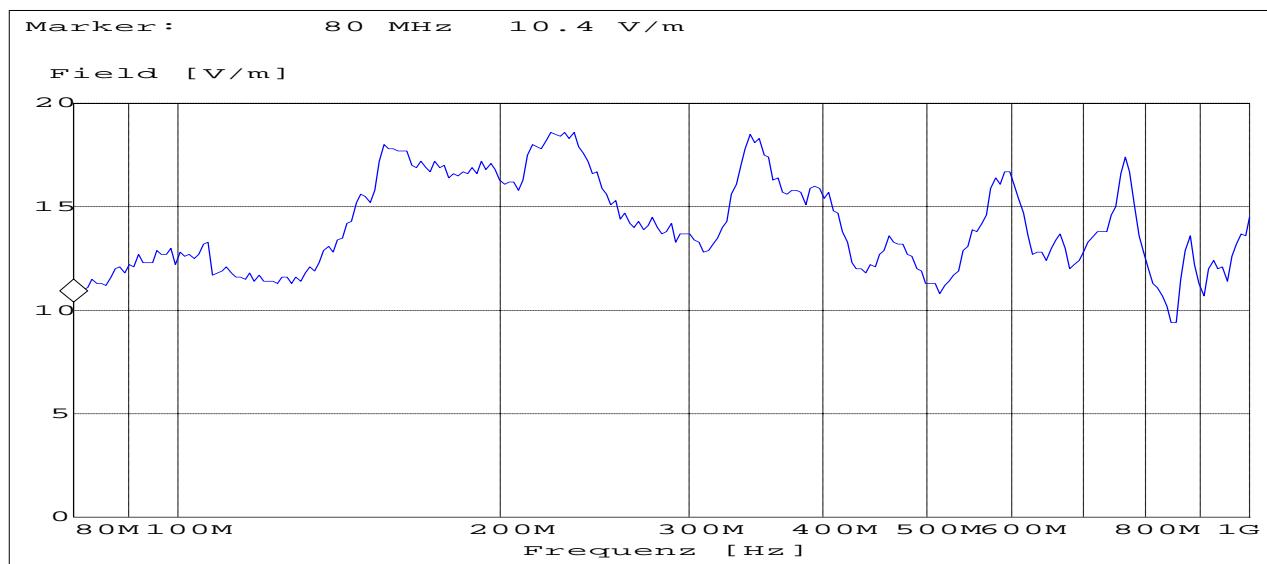


20608lv0: 80 MHz to 1000 MHz, vertical polarisation

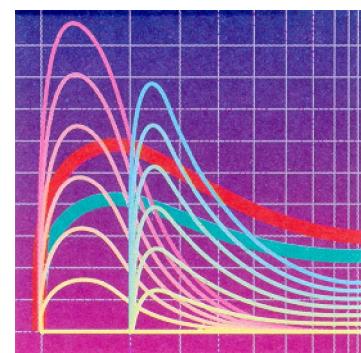



**PHOENIX  
TEST-LAB**

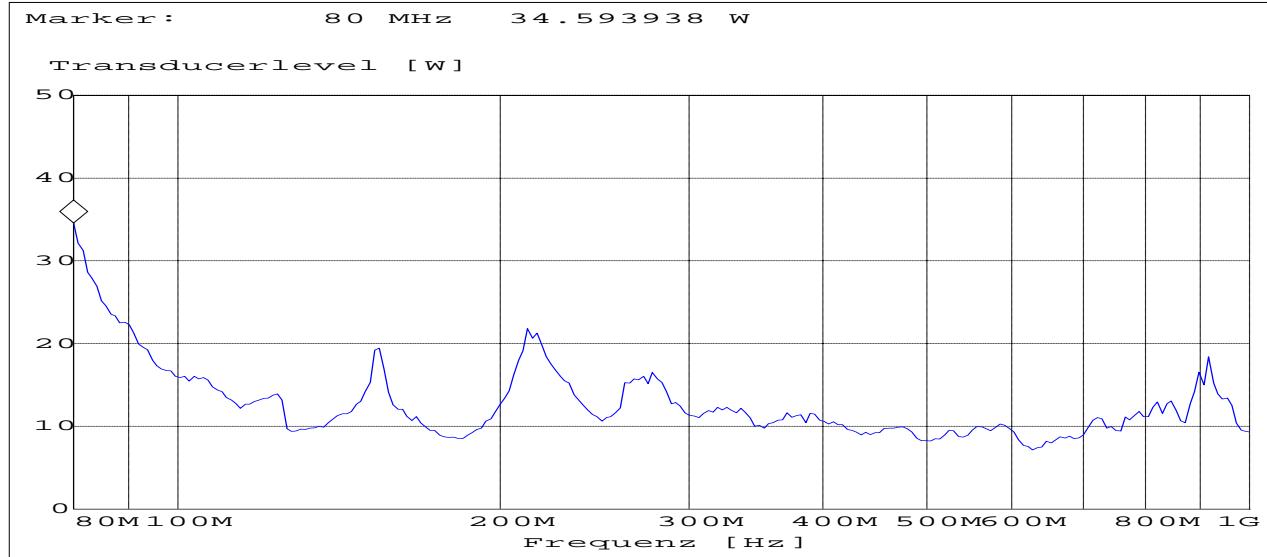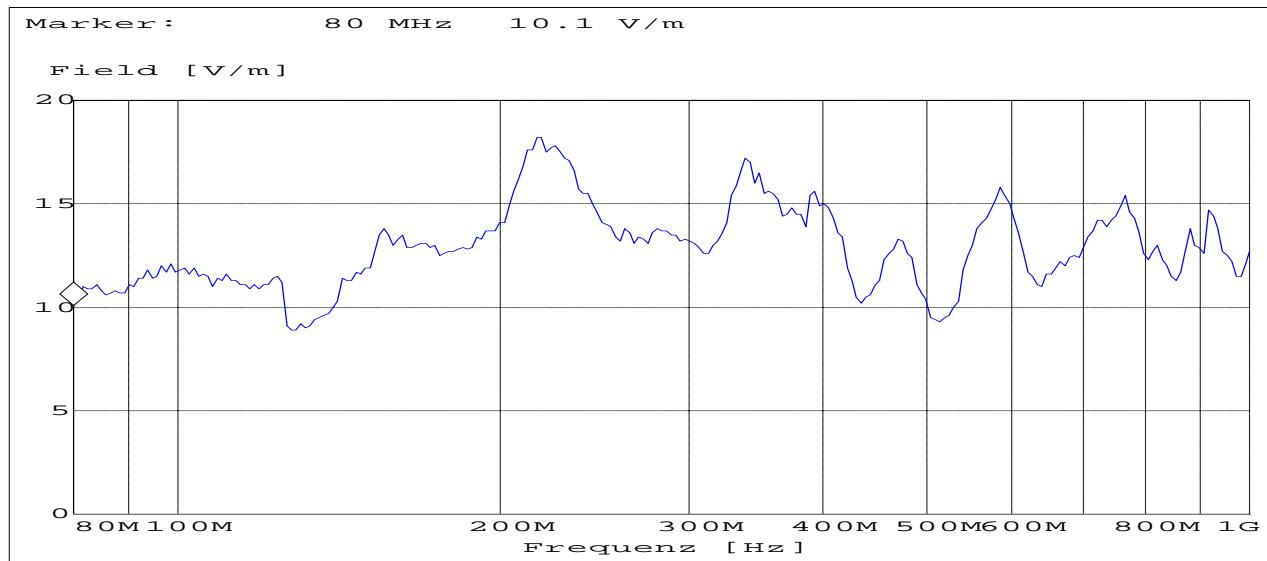


20608lh0: 80 MHz to 1000 MHz, horizontal polarisation

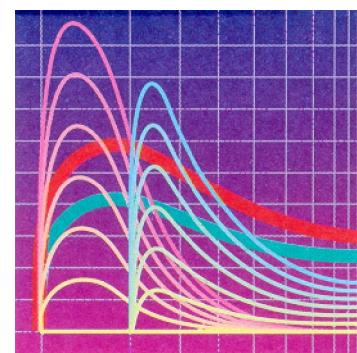



**PHOENIX**  
**TEST-LAB**

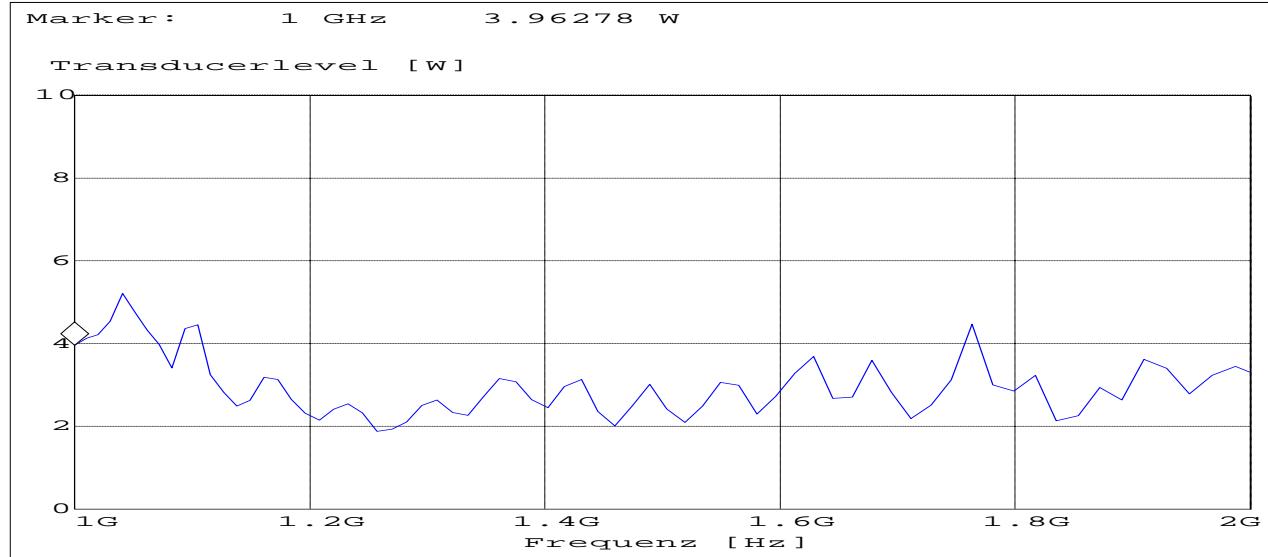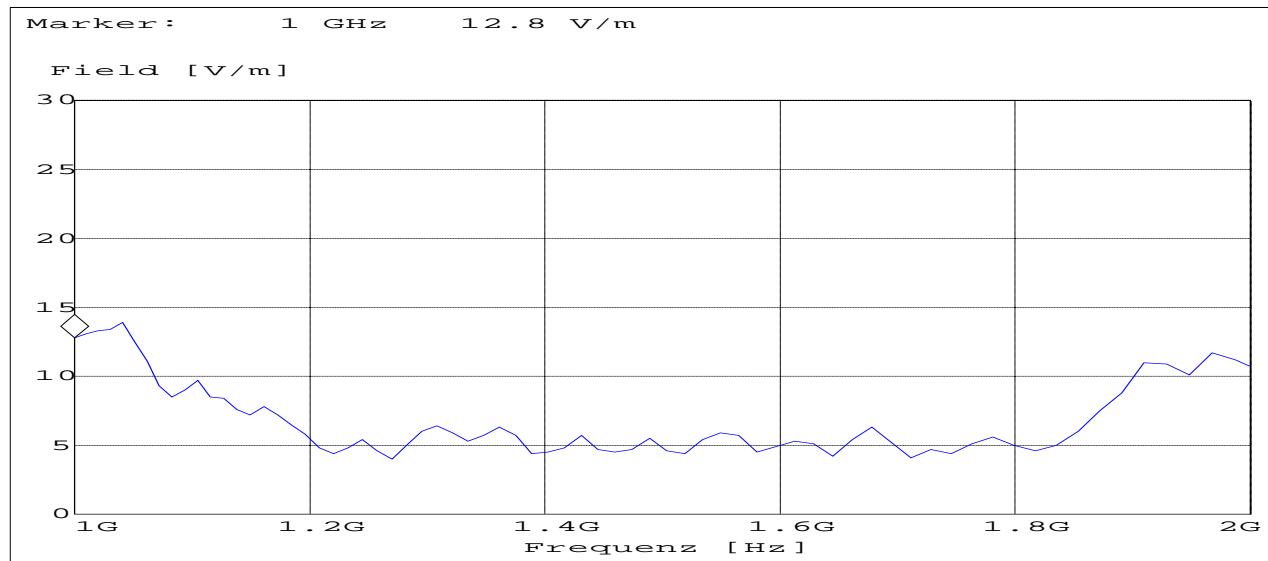


20608hv0: 1 GHz to 2 GHz, vertical polarisation

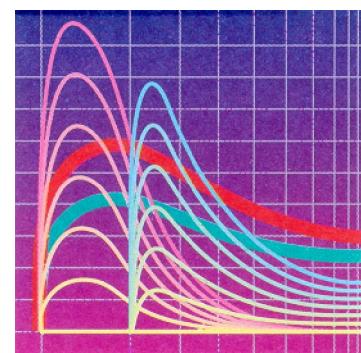

**PHOENIX**  
**TEST-LAB**

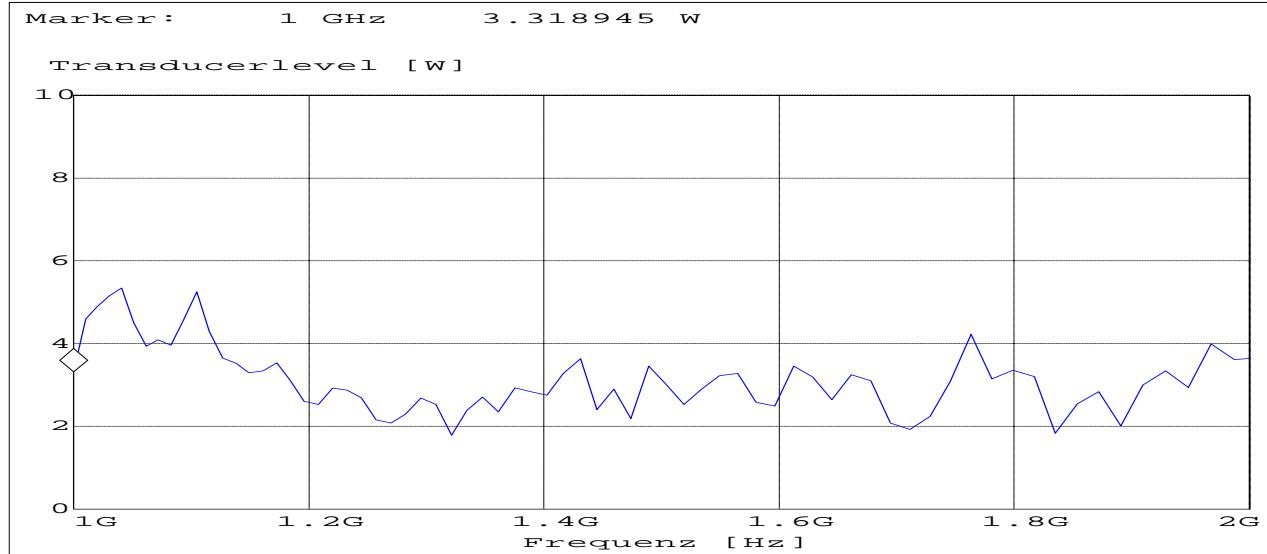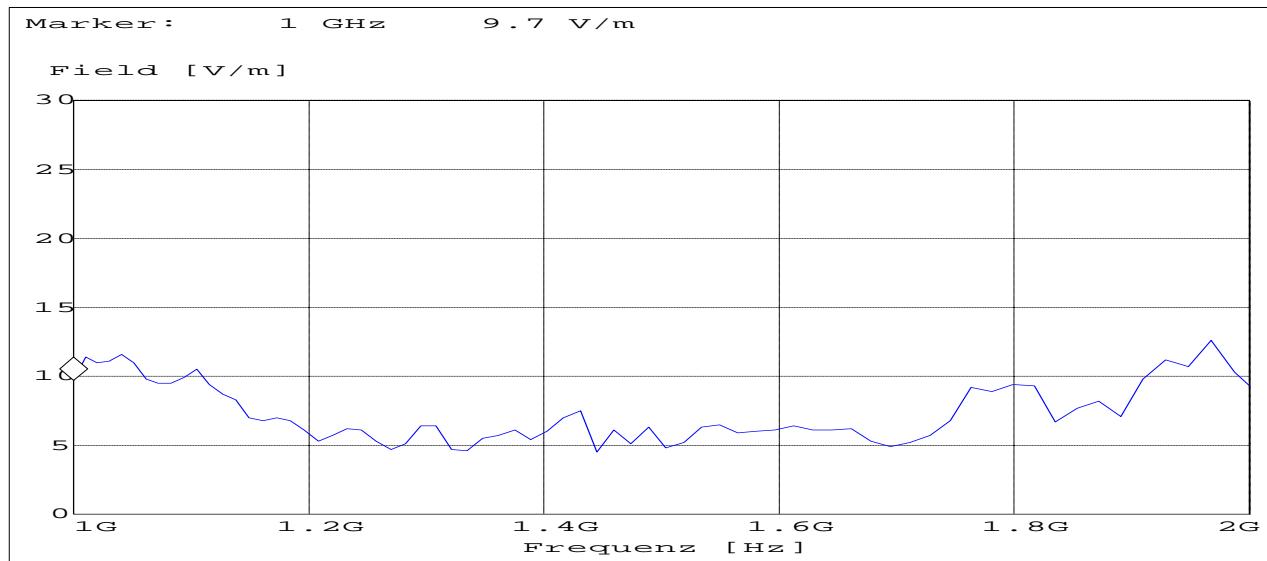

20608hh0: 1 GHz to 2 GHz, horizontal polarisation

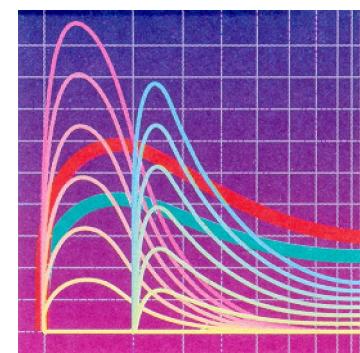


**PHOENIX  
TEST-LAB**

## 4.2 Immunity test for conducted voltages, induced by RF-fields according to EN 60945 chapter 10.3

Test set-up:

- Table set-up
- The drawing below schematically shows the test set-up.
- Photos of the test set-up can also be referred to in the annex.
- The EUT is placed 10 cm above the ground plane.

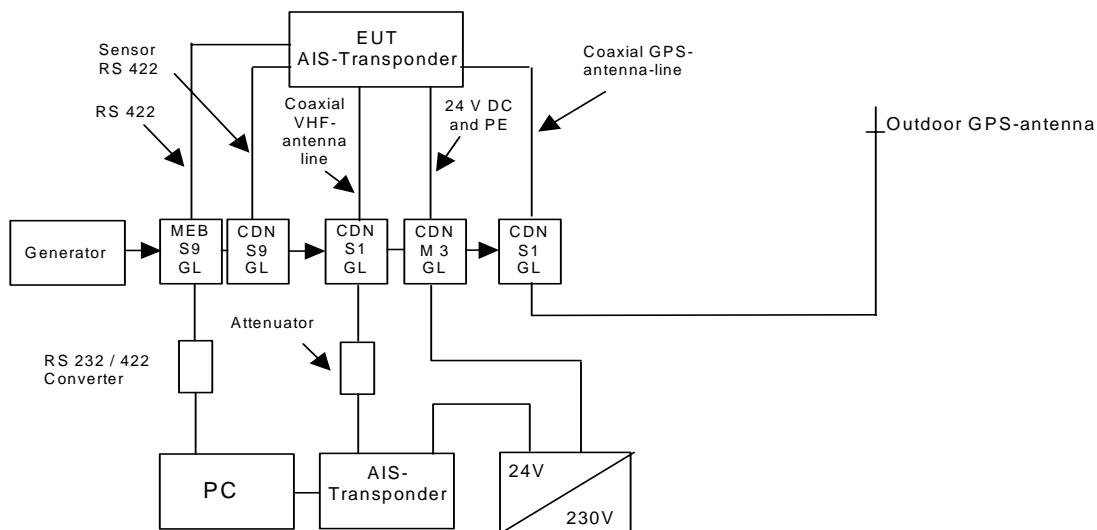



Measurement devices: Power amplifier AR 25A250A (PM No. 480154)  
 Signal generator SMG (PM No. 480016)  
 Millivoltmeter URV5 (PM No. 480015)  
 Power probe URV5-Z2 (PM No. 480019, PM No. 480020)  
 Terminating impedance RNB (PM No. 480007, PM No. 480008)  
 Relay interface ICS 4874 (PM No. 480066)  
 Attenuator 6dB (PM-No. 410061)  
 EMS software package EMS-K1 (PM No. 480112)  
 Shielded room (PM No. 480088)  
 DC filter (PM-No. 480099)  
 EMV CDN S1GL A (PM-No. 410172)  
 EMV CDN S1GL B (PM-No. 410173)  
 Lüthi CDN 801-S9 (PM-No. 410040)  
 EMV CDN M3 GL (PM-No. 410083)

#### Measuring records:


The tests in the table below were carried out.

Date of test:	05. Sept. 2002		
Ambient conditions:	55% F <sub>rel</sub> , 20°C		
Test level 1:	10 kHz – 80 MHz, 10V, AM, 80%, 400 Hz		
Increment:	log 1%		
Test level 2:	2 MHz, 3 MHz, 4 MHz, 6.2 MHz, 8.2 MHz, 12.6 MHz, 16.5 MHz, 18.8 MHz, 22 MHz, 25 MHz, 10V, AM, 80%, 400 Hz		
Dwell time:	≥3s		
Coupling network	Coupling to	EUT reaction	Result
CDN M3 GL	24 V DC + PE	No reaction detected	A
CDN S9 GL	RS 422 Display	No reaction detected	A
CDN S9 GL	RS 422 Sensor	No reaction detected	A
CDN S1 GL	GPS-antenna	No reaction detected	A
CDN S1 GL	VHF-antenna	No reaction detected	A



Test result: The requirements for the test documents were fulfilled.

The curves in the following graphs are representative of the entire frequency range:


- The 'CDN INPUT POWER' curve represents the power transmitted to the CDN.
- This power profile must be taken as the basis of any subsequent test.

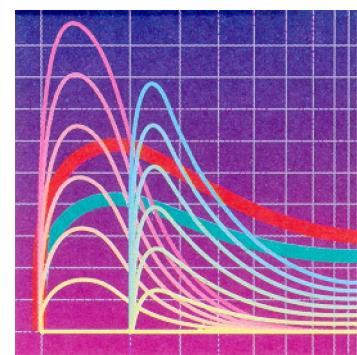



**PHOENIX  
TEST-LAB**

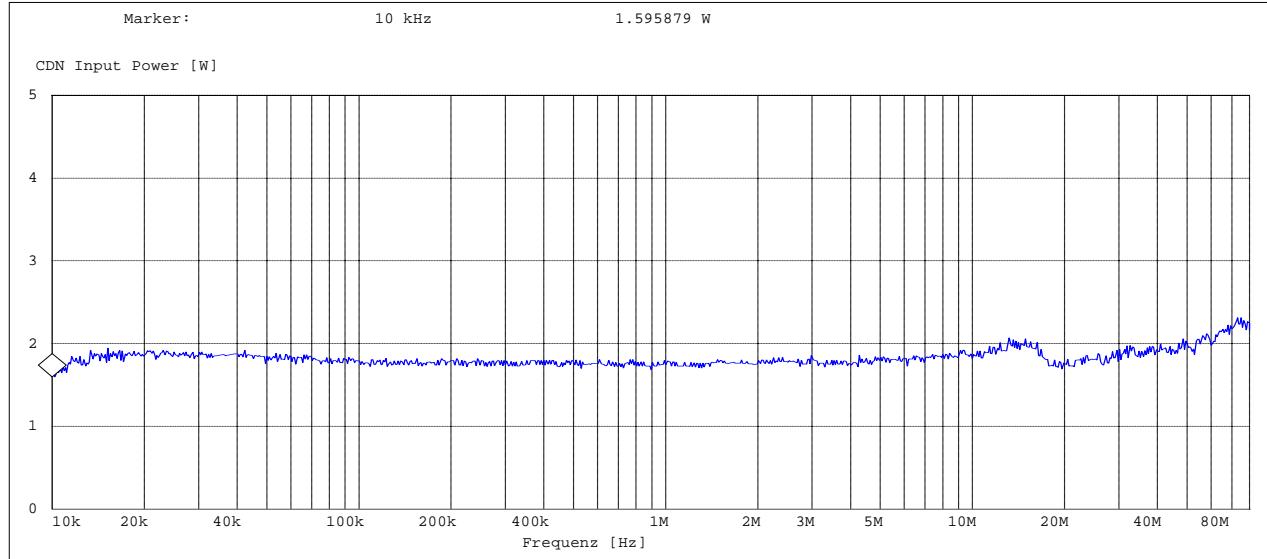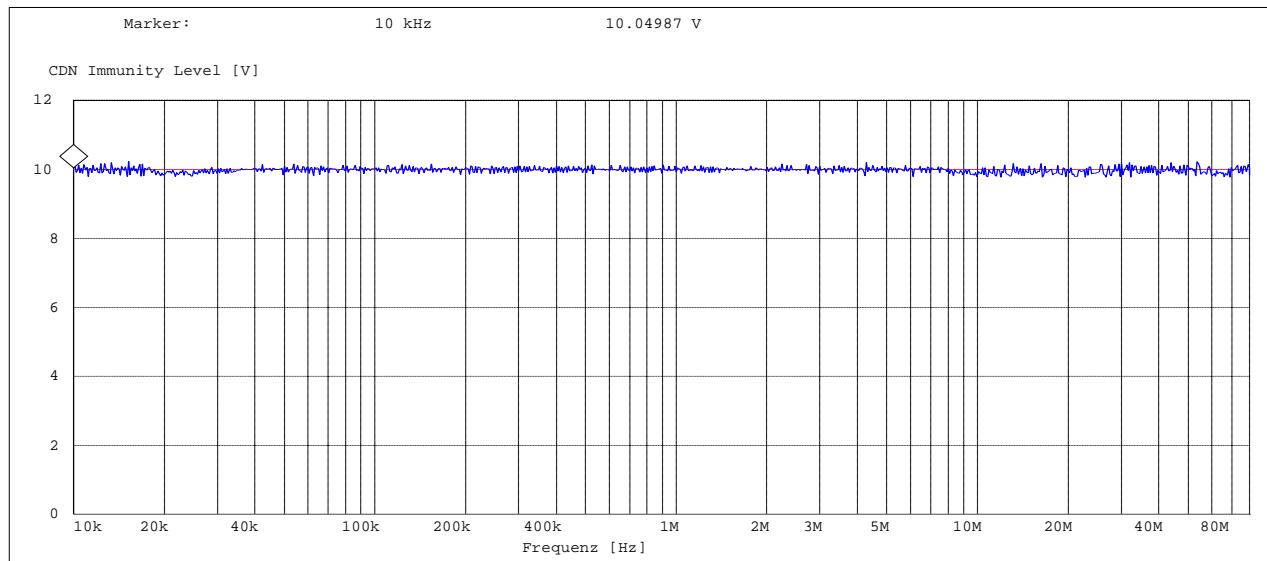


20608DC\_1: 10 kHz to 80 MHz, coupling to 24 V DC-line

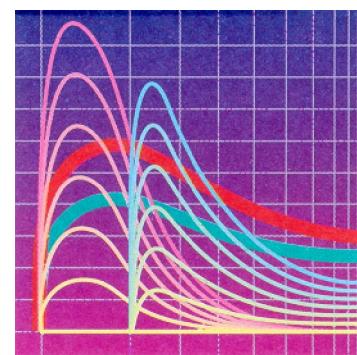



**PHOENIX  
TEST-LAB**

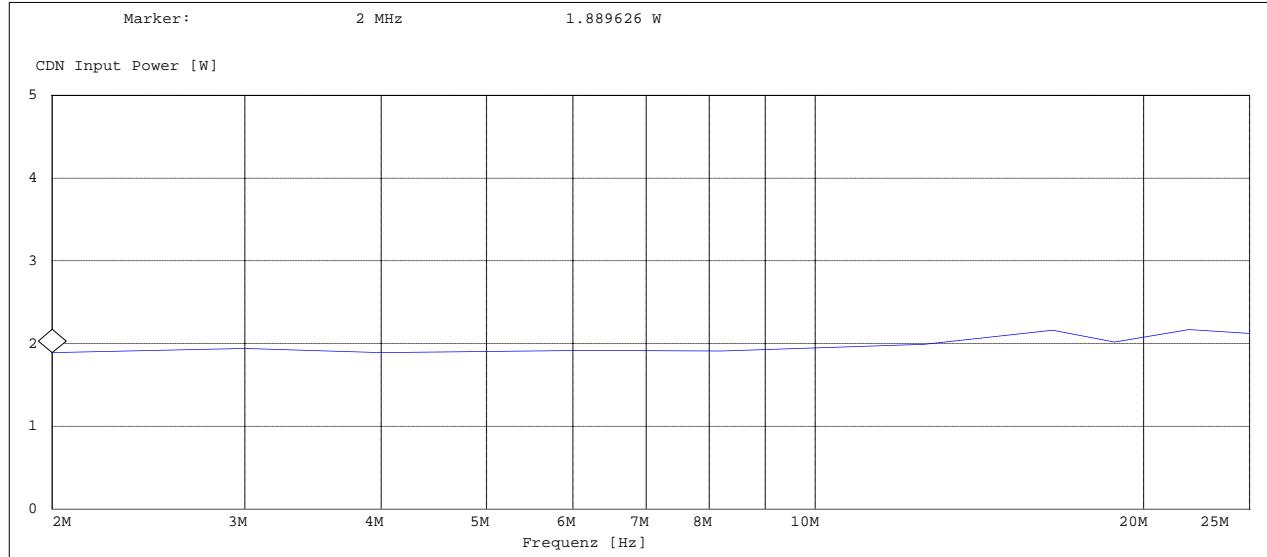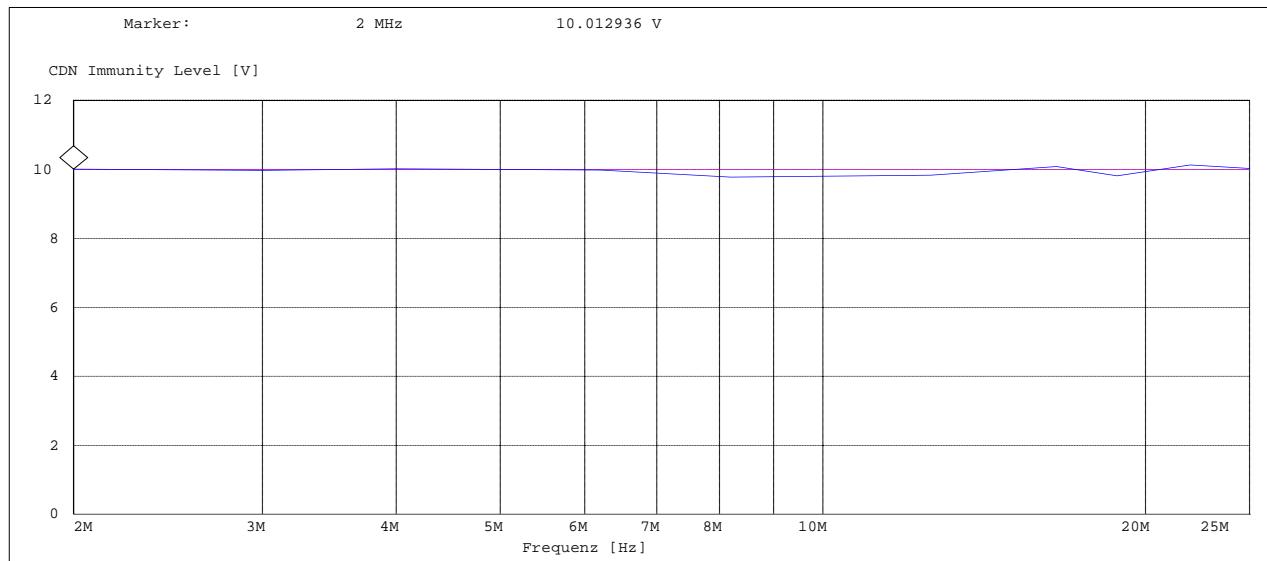


20608DC\_2: Spot frequencies, coupling to 24 V DC-line

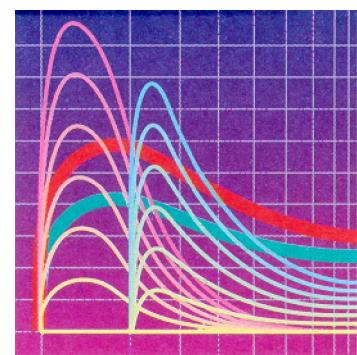



**PHOENIX**  
**TEST-LAB**

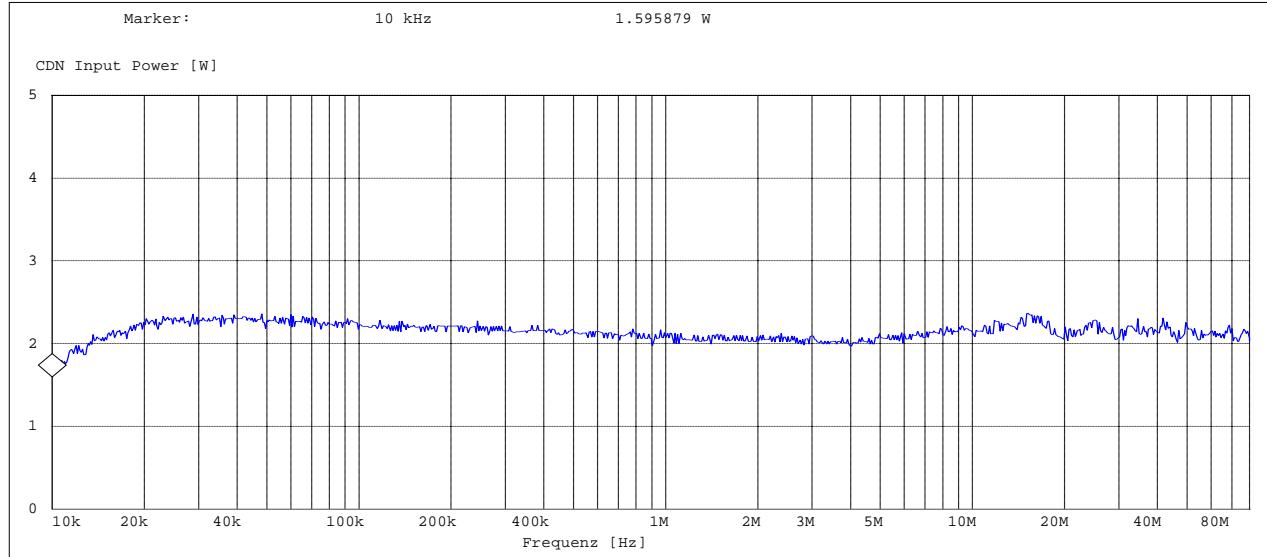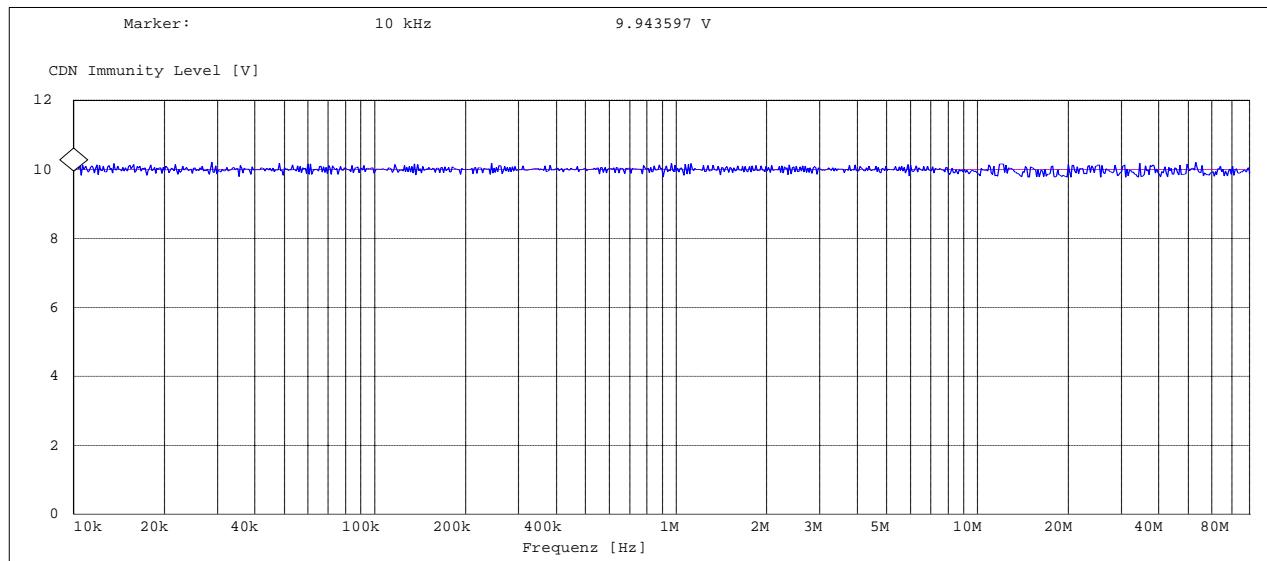


20608GPS\_1: 10 kHz to 80 MHz, coupling to GPS antenna-line

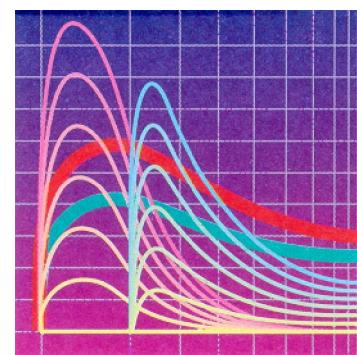



**PHOENIX  
TEST-LAB**

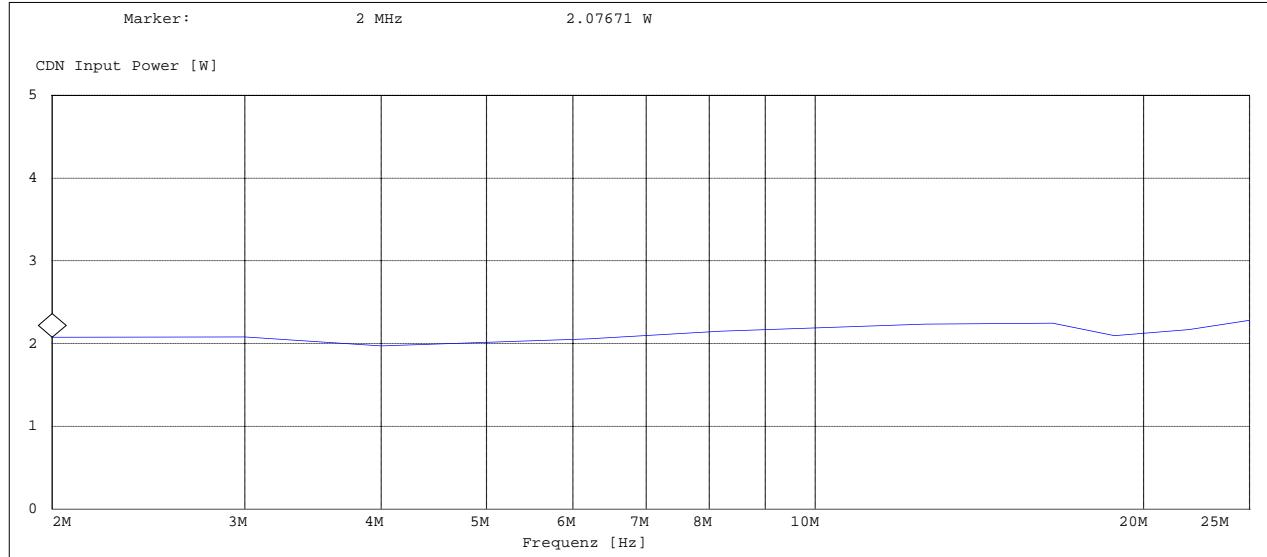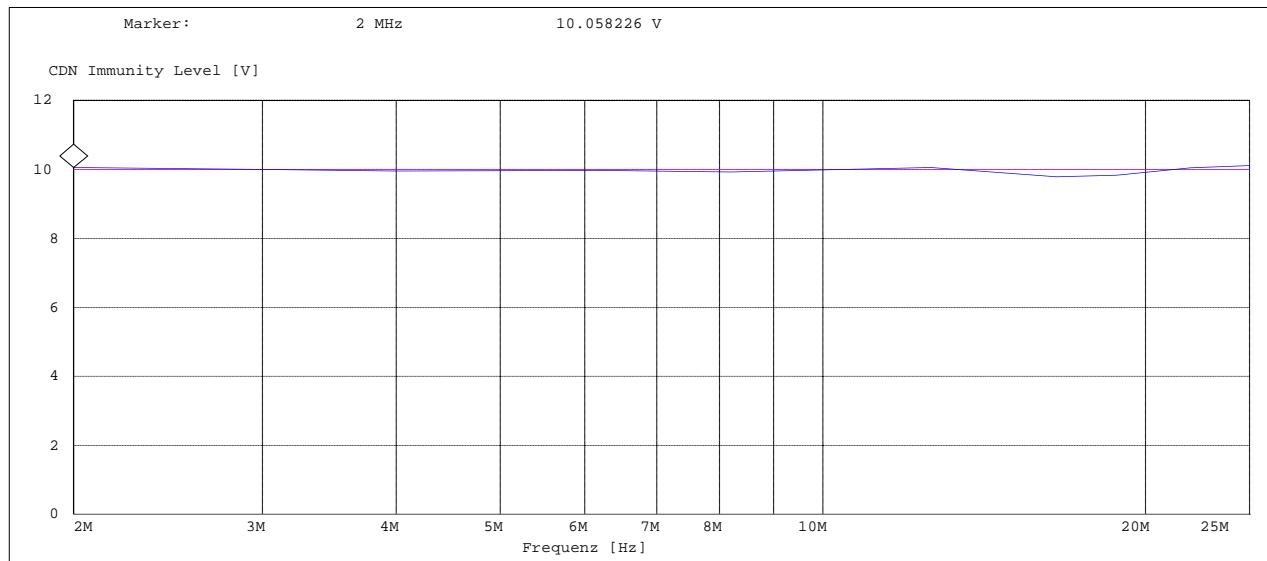


20608GPS\_2: Spot frequencies, coupling to GPS antenna-line

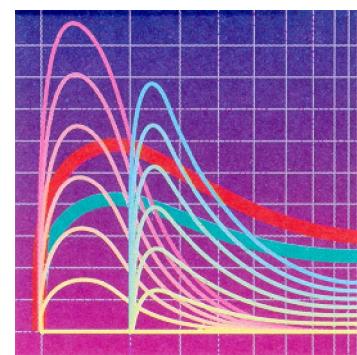



**PHOENIX  
TEST-LAB**

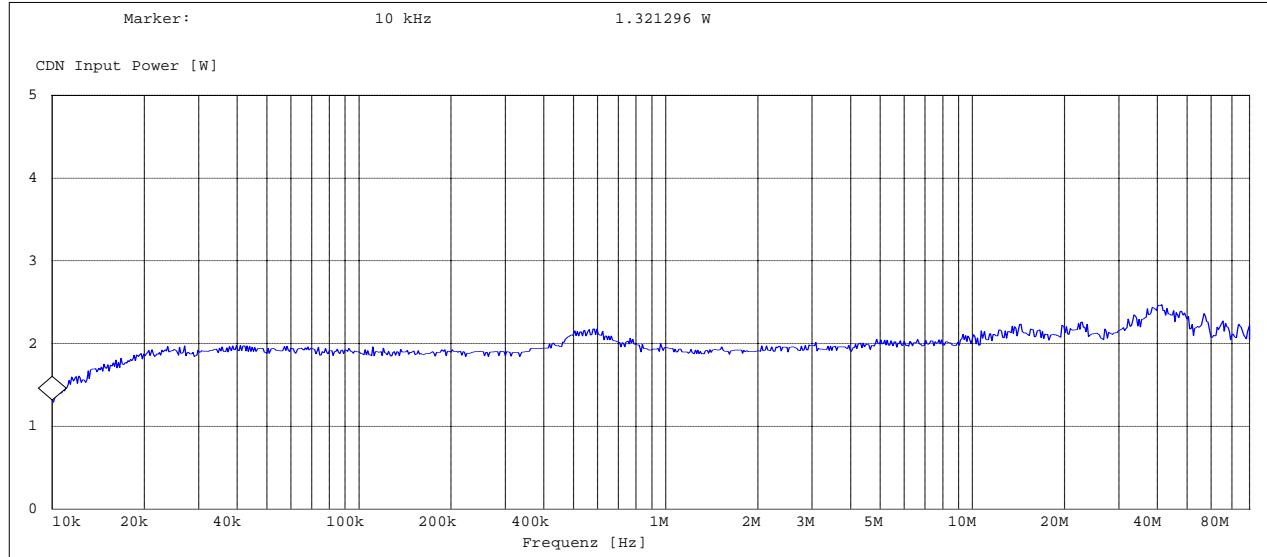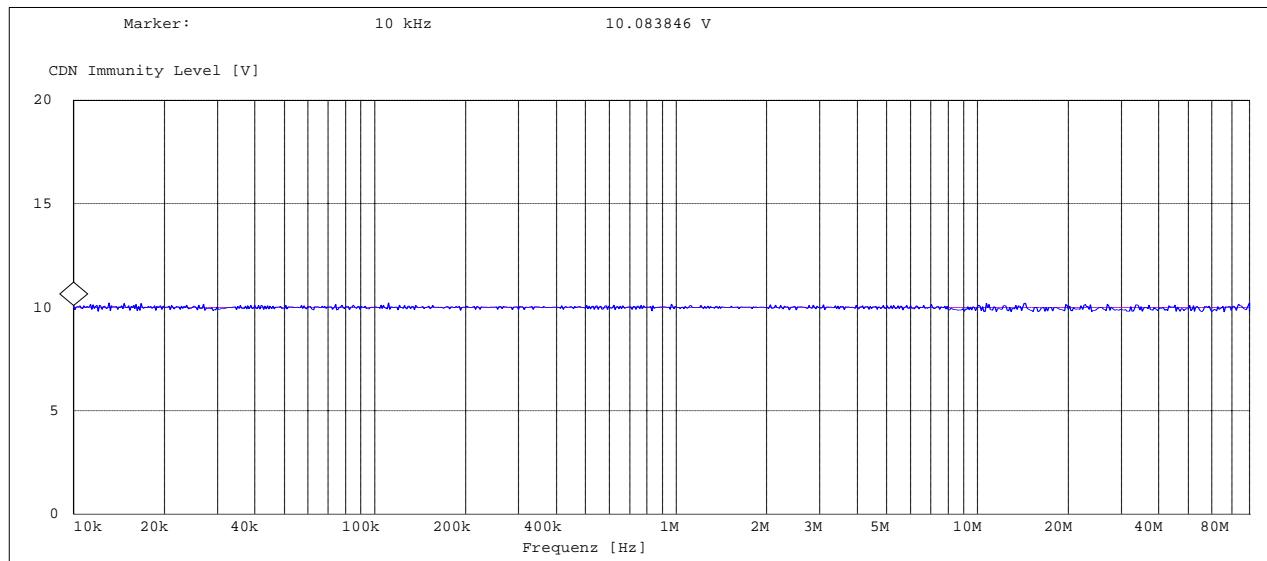


20608RS422\_1: 10 kHz to 80 MHz, coupling to RS 422 data-line

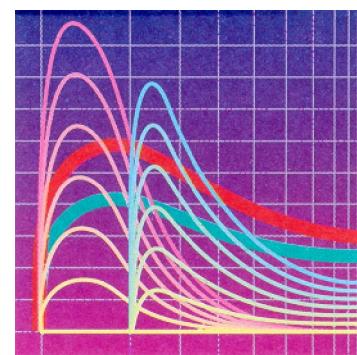



**PHOENIX  
TEST-LAB**

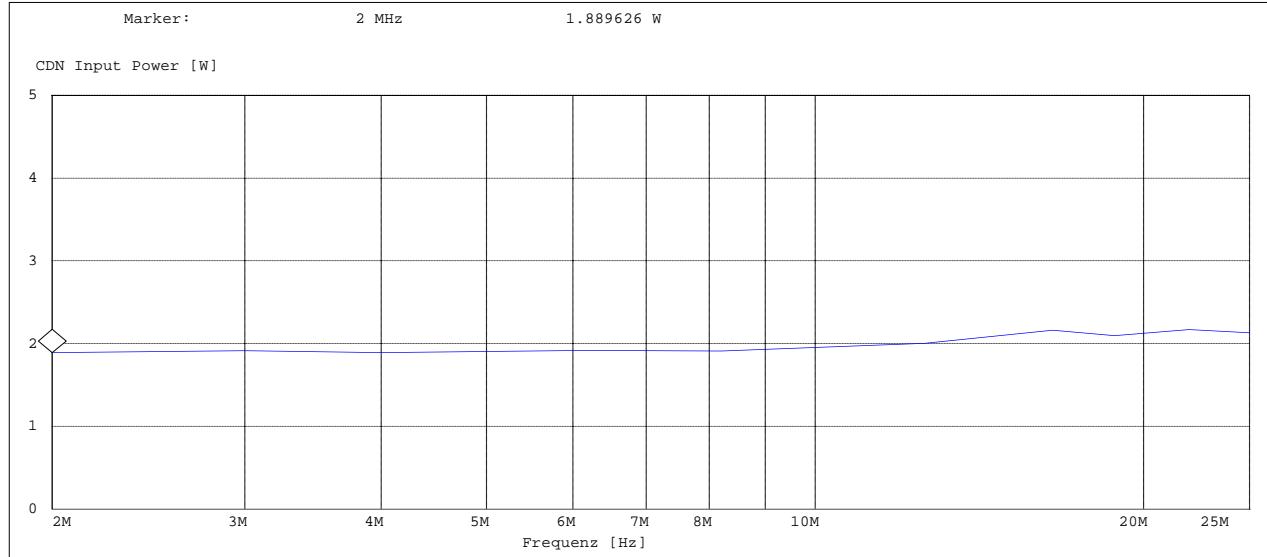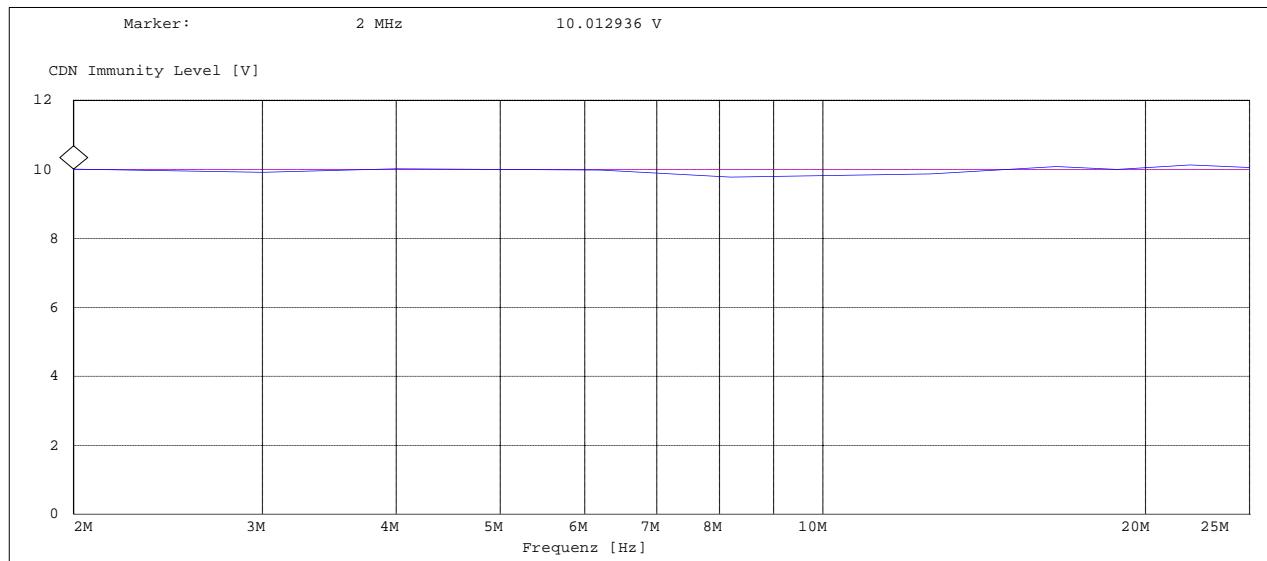


20608RS422\_2: Spot frequencies, coupling to RS 422 data-line

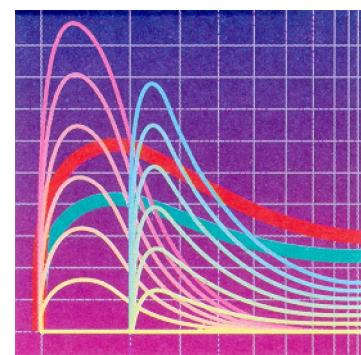



**PHOENIX**  
**TEST-LAB**

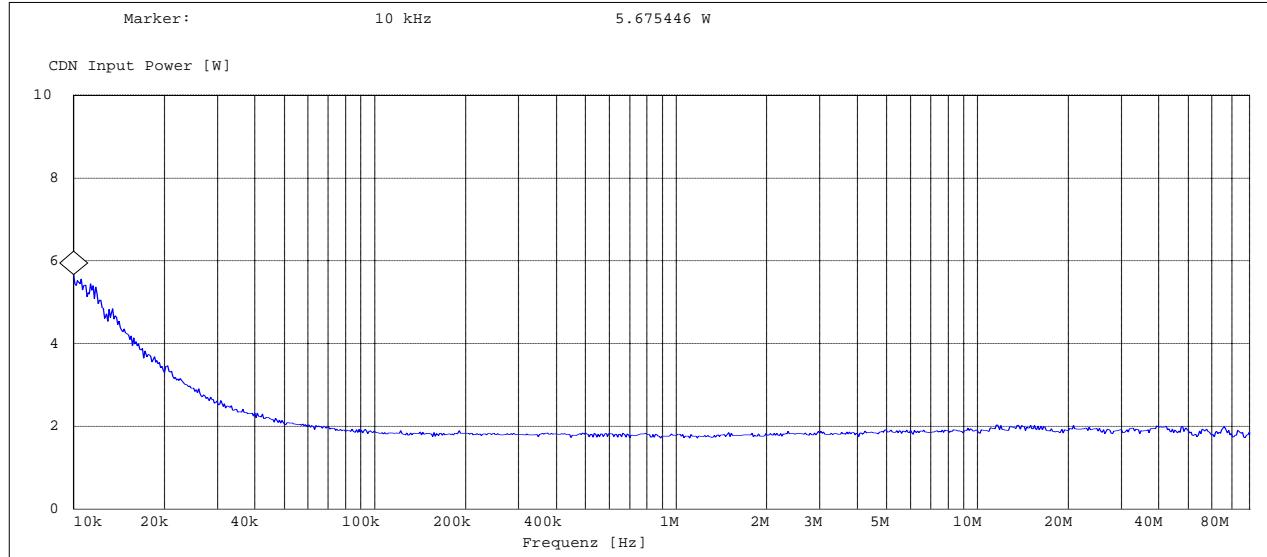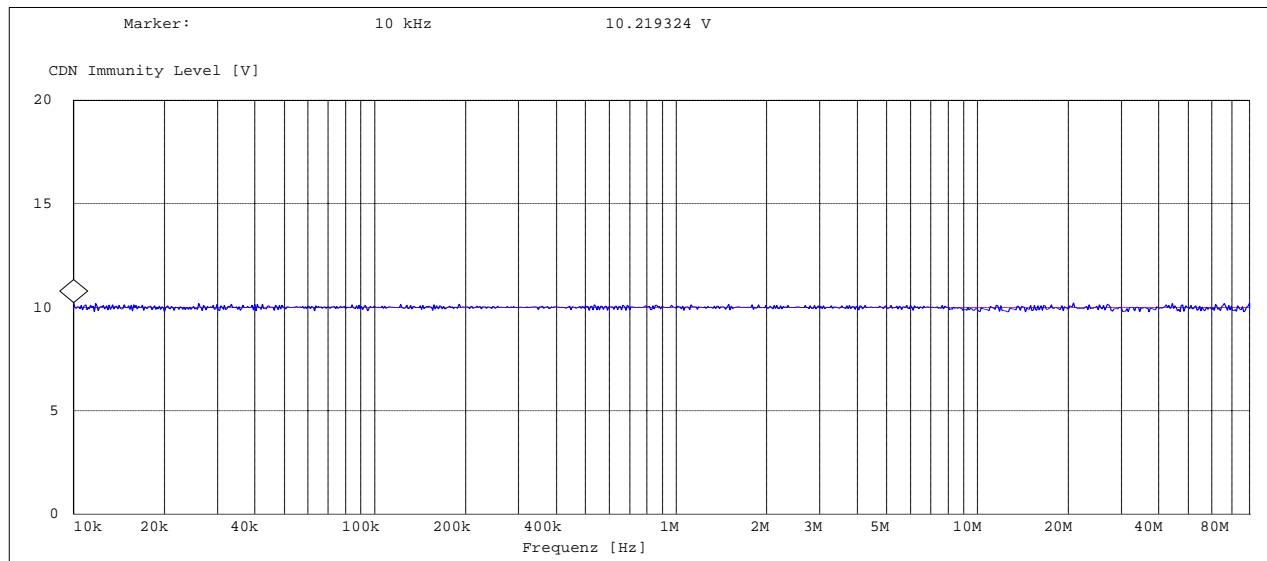


20608Sensor\_1: 10 kHz to 80 MHz, coupling to RS 422 sensor-line

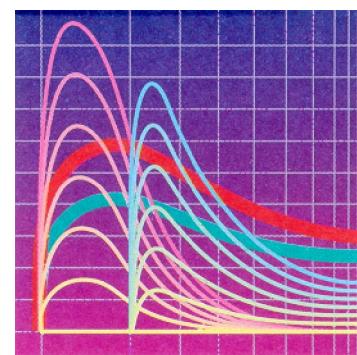



**PHOENIX  
TEST-LAB**

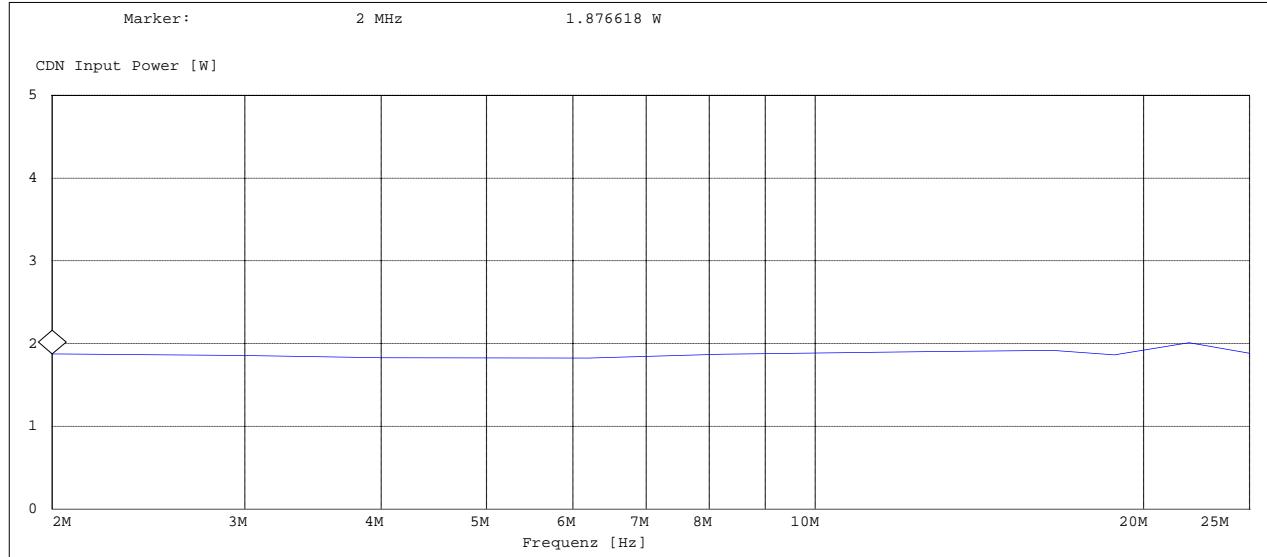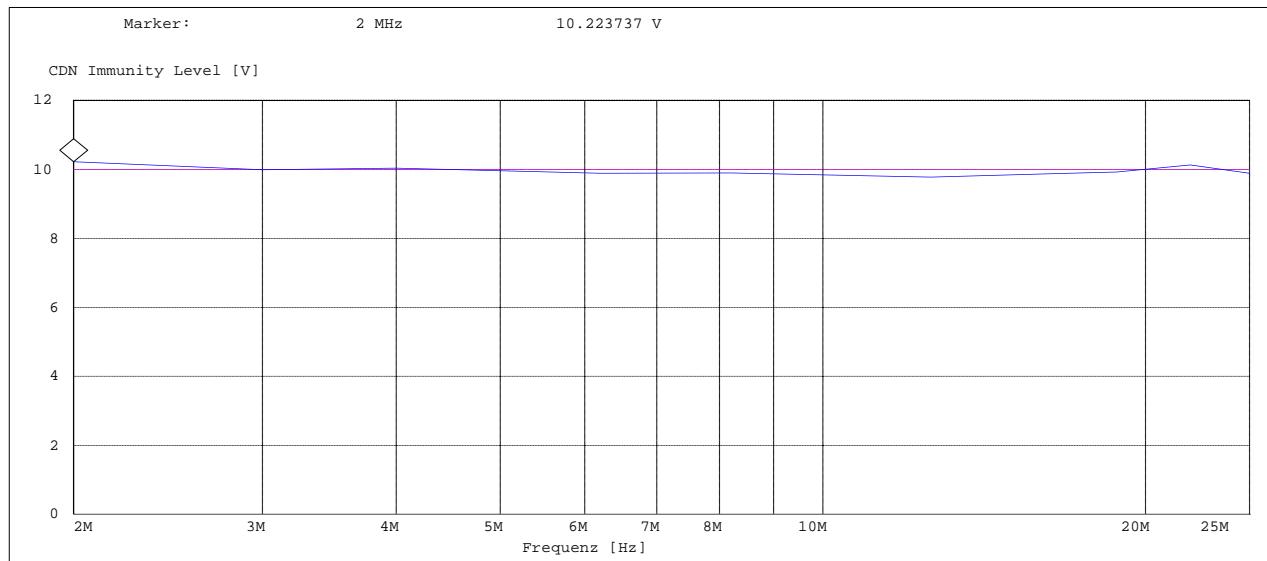


20608Sensor\_2: Spot frequencies, coupling to RS 422 sensor-line

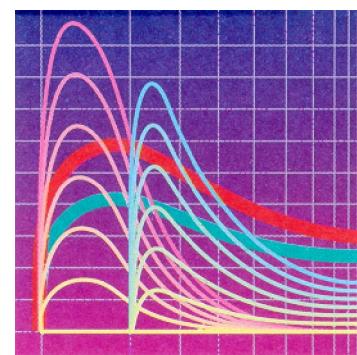



**PHOENIX**  
**TEST-LAB**

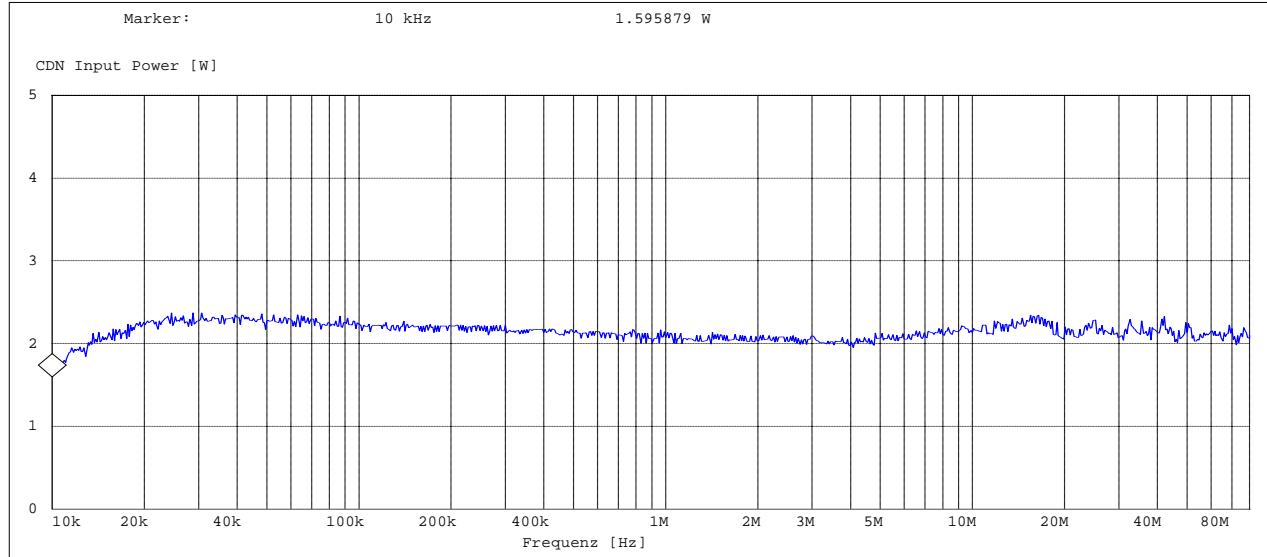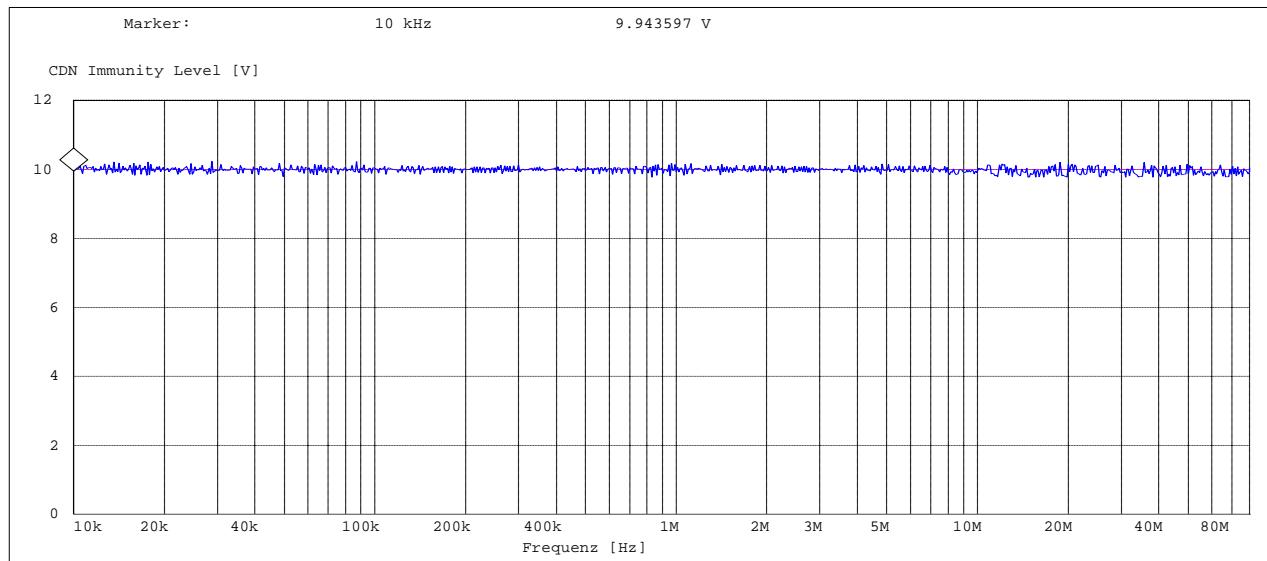


20608VHF\_1: 10 kHz to 80 MHz, coupling to VHF antenna-line

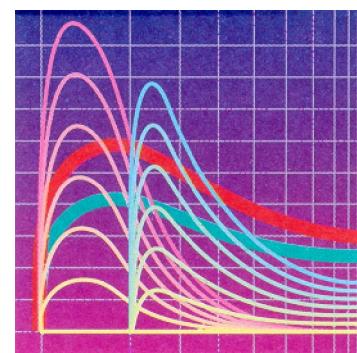

**PHOENIX  
TEST-LAB**

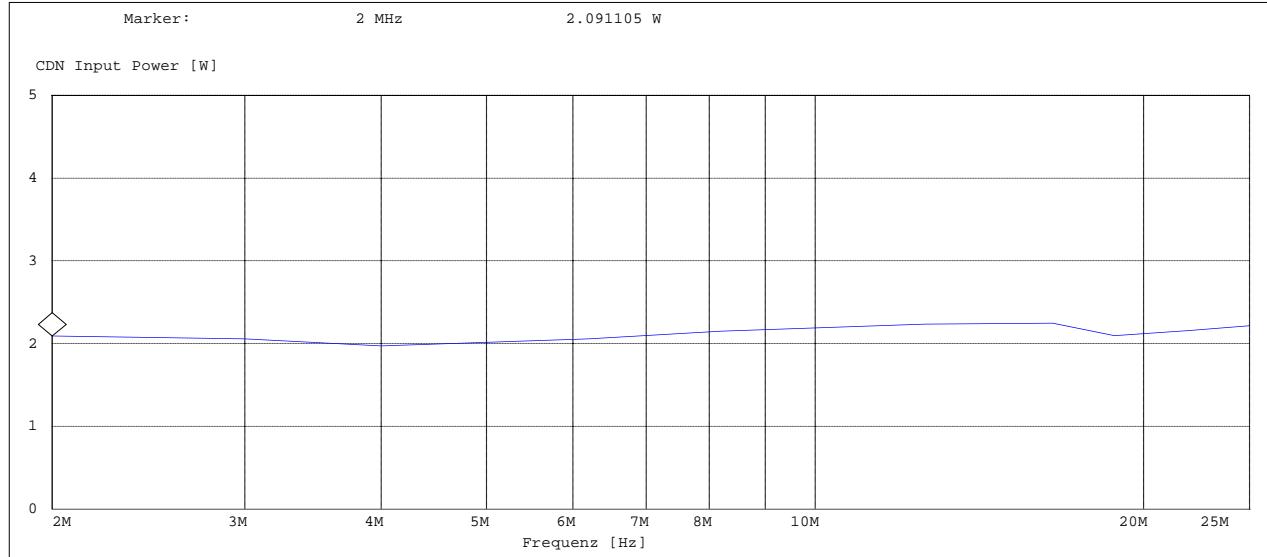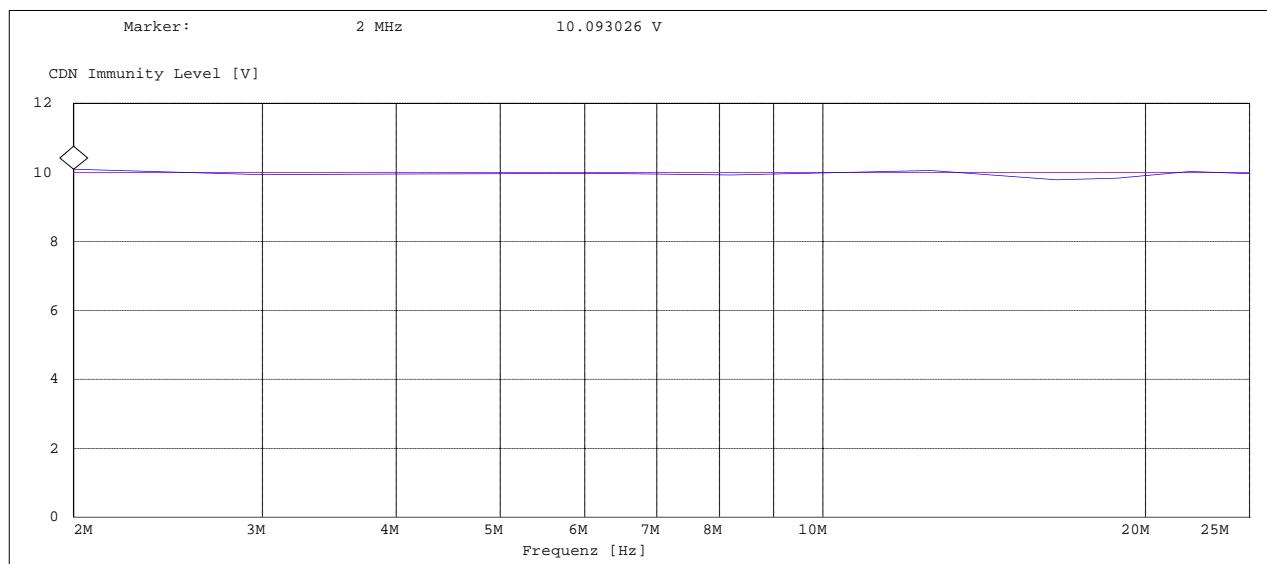

20608VHF\_2: Spot frequencies, coupling to VHF antenna-line

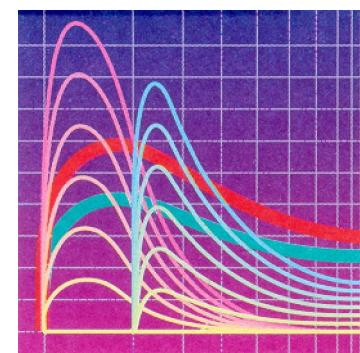


**PHOENIX  
TEST-LAB**

### 4.3 Immunity test for discharge of static electricity according to EN 60945 chapter 10.9


Test set-up:

- Table set-up
- The drawing below schematically shows the test set-up.
- Photos of the test set-up can also be referred to in the annex.

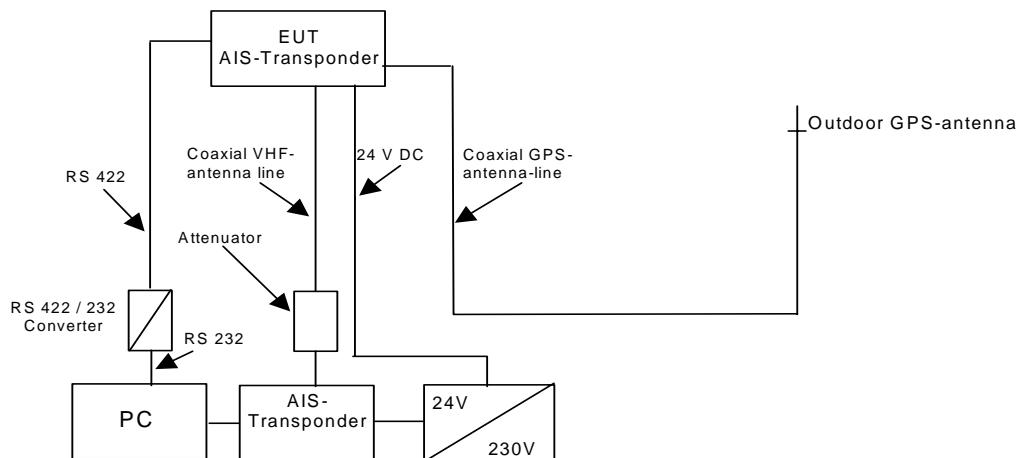


Test plan:

The equipment under test is triggered with 10 positive and negative impulses each per discharge location and test voltage.  
 Contact discharge (CD) is carried out on the conductive parts of the equipment under test and on the coupling plates for the indirect discharge.  
 Air discharge (AD) is carried out on isolating parts of the equipment under test.  
 The discharge locations can be seen on the following figure.  
 Indirect discharge (ID) is carried out on the vertical (VCP) and horizontal (HCP) coupling plate.

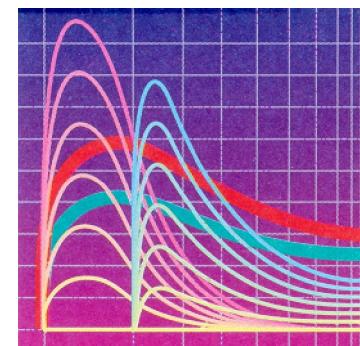


### Test set-up: Front view

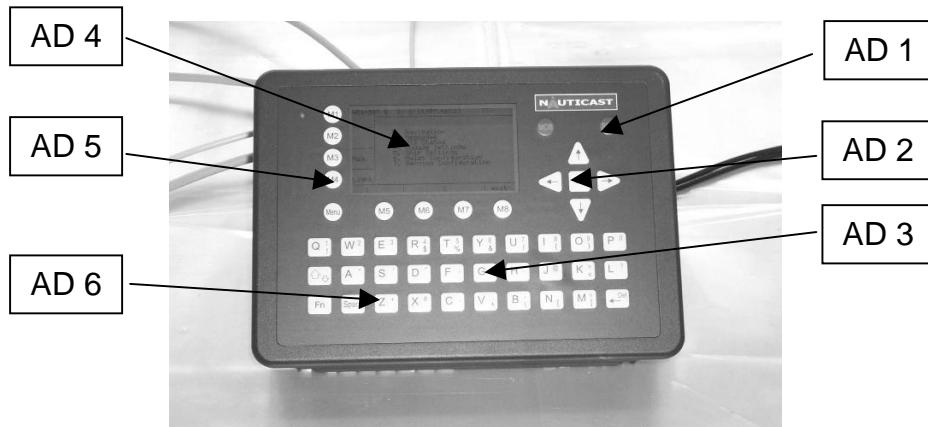

AD 1: SOS-button  
 AD 2: Enter-button  
 AD 3: Keyboard

AD 4: Display  
 AD 5: Keyboard  
 AD 6: Keyboard


### Test set-up: Rear view

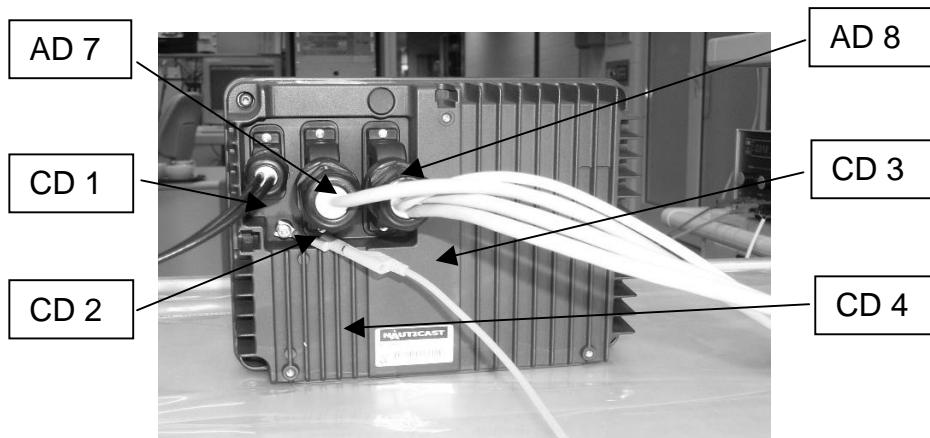

AD 7: Connector  
 CD 1: Connector screw  
 CD 2: PE-Connector

AD 8: Connector  
 CD 3: Enclosure  
 CD 4: Enclosure

Measuring devices:  
 Schaffner ESD simulator NSG 435 (PM No. 480027)  
 Testing table Numerik PTi (PM No. 480049)

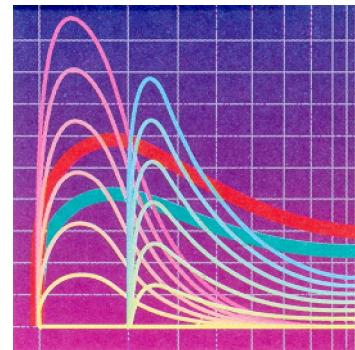


### Measuring records:

The tests in the table below were carried out.

Date of test:	09 Sept. 2002		
Ambient conditions:	60% $F_{rel}$ , 19°C; Air pressure conforms to the requirements of the standard		
Number of impulses:	10 per polarity, test voltage and discharge location		
Method of discharge	Discharge location	EUT reaction	Result
Indirect coupling $\pm 2\text{kV}$	HCP 1 to 4 VCP 1 to 4	No reaction detected No reaction detected	B B
Indirect coupling $\pm 4\text{kV}$	HCP 1 to 4 VCP 1 to 4	No reaction detected No reaction detected	B B
Indirect coupling $\pm 6\text{kV}$	HCP 1 to 4 VCP 1 to 4	No reaction detected No reaction detected	B B
Direct coupling $\pm 2\text{kV}$	CD 1 to 4	No reaction detected	B
Direct coupling $\pm 4\text{kV}$	CD 1 to 4	No reaction detected	B
Direct coupling $\pm 6\text{kV}$	CD 1 to 4	No reaction detected	B
Air discharge $\pm 2\text{kV}$	AD 1 to 8	No reaction detected	B
Air discharge $\pm 4\text{kV}$	AD 1 to 8	No reaction detected	B
Air discharge $\pm 8\text{kV}$	AD 1 to 8	No reaction detected	B


Test results: The requirements of the test documents were fulfilled.

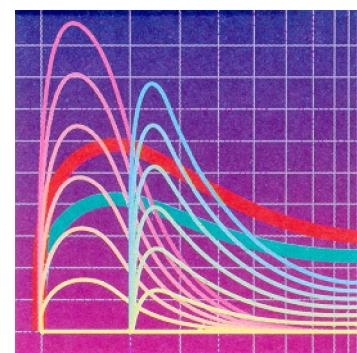

#### 4.4 Immunity test for electrical fast transients (burst) according to EN 60945 chapter 10.5


Test set-up:

- Table set-up
- The drawing below schematically shows the test set-up.
- Photos of the test set-up can also be referred to in the annex.
- The EUT is placed 10 cm above the ground plane.

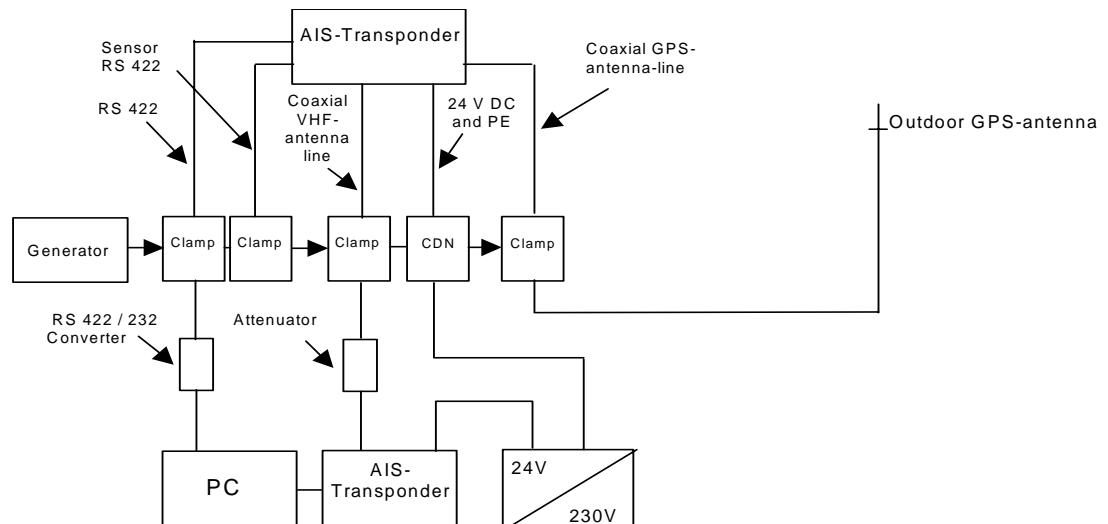

Measuring devices:

- Test table Numerik PTi (PM No. 480050)
- Test system PEFT (Burst) (PM No. 480028)
- Coupling filter FP-EFT 32.1 (PM No. 480029)
- Coupling clamp IP4A (PM No. 480030)
- Software: WinPATS (PM No. 480113)

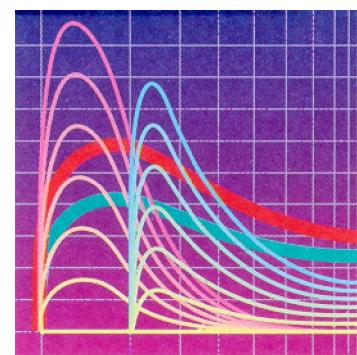


### Measuring records:

The tests in the table below were carried out.

Date of test:	9 Sept. 2002			
Ambient conditions:	65% Frel, 20°C; the air pressure conforms to the requirements of the standard			
Test duration:	5 min per polarity, test voltage and line			
Burst frequency:	5 kHz			
Method of coupling	Coupling to	Test voltage	EUT reaction	Result
CDN	24 V DC	$\pm 2$ kV DM $\pm 1$ kV CM	No reaction detected	B
Coupling clamp	VHF-Antenna	$\pm 1$ kV CM	No reaction detected	B
Coupling clamp	GPS-Antenna	$\pm 1$ kV CM	No reaction detected	B
Coupling clamp	RS 422-Display	$\pm 1$ kV CM	No reaction detected	B
Coupling clamp	RS 422-Sensor	$\pm 1$ kV CM	No reaction detected	B

Remark: DM: Differential mode  
CM: Common mode

Test results: The requirements of the test documents were fulfilled.

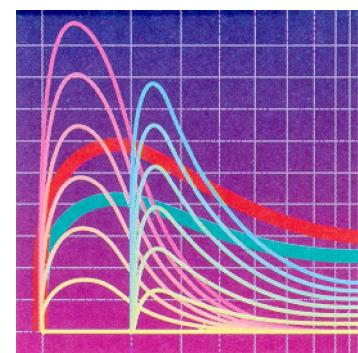


**PHOENIX  
TEST-LAB**

## 4.5 Immunity test for electrical transients (surge) according to EN 60945 chapter 10.6


Test set-up:

- Table set-up
- The drawing below schematically shows the test set-up.
- Photos of the test set-up can also be referred to in the annex.
- The EUT is placed 10 cm above the ground plane.

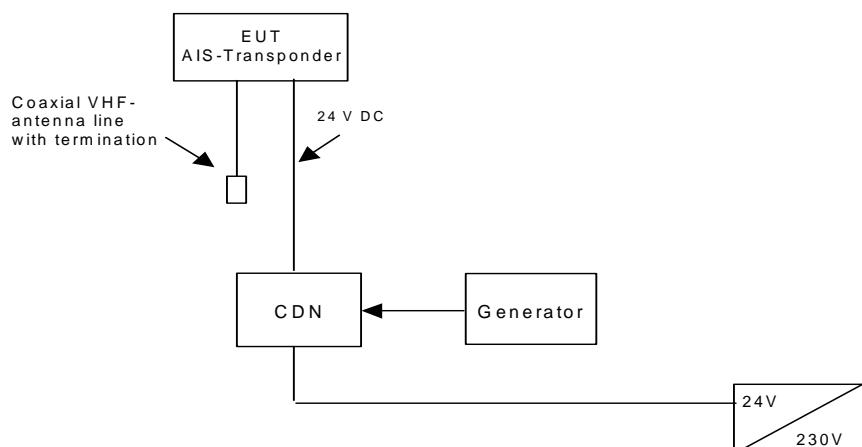

Measuring devices:

- Test table Numerik PTi (PM-No. 480050)
- Test system PSURGE (PM-No. 480031)
- Coupling filter FP-SURGE 32.1 (PM-No. 480032)
- Coupling network IP 6.2 (PM-No. 480034)
- Coupling device AP 300
- Decoupling network DEC1A (PM-No. 480153)
- Software: Win PATS (PM-No. 480113)

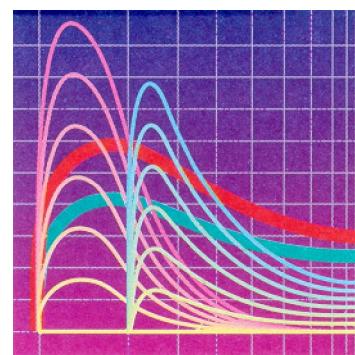


Measuring records:

The tests in the table below were carried out.

Date of test:	9 Sept. 2002			
Ambient conditions:	65 % Frel, 20°C; the air pressure is in accordance to the standard			
Test duration:	5 impulses per polarity, test voltage and line			
Pulse interruptions:	60s			
Method of coupling	Coupling to	Test voltage	EUT reaction	Result
CDN	24 V DC	± 0.5 kV line / line ± 1 kV line / earth	No reaction detected	B

Test results:


The requirements of the test documents were fulfilled.

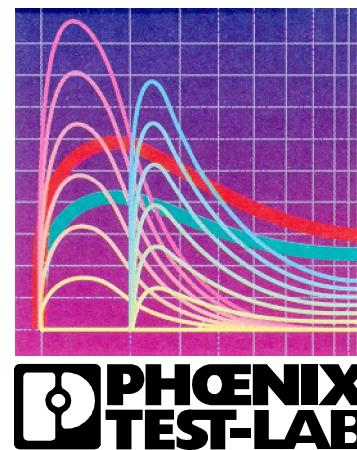

## 4.6 Conducted low frequency interference (harmonics and interharmonics) according to EN 60945 chapter 10.2

Test set-up:

- Table set-up
- The drawing below schematically shows the test set-up.
- Photos of the test set-up can also be referred to in the annex.

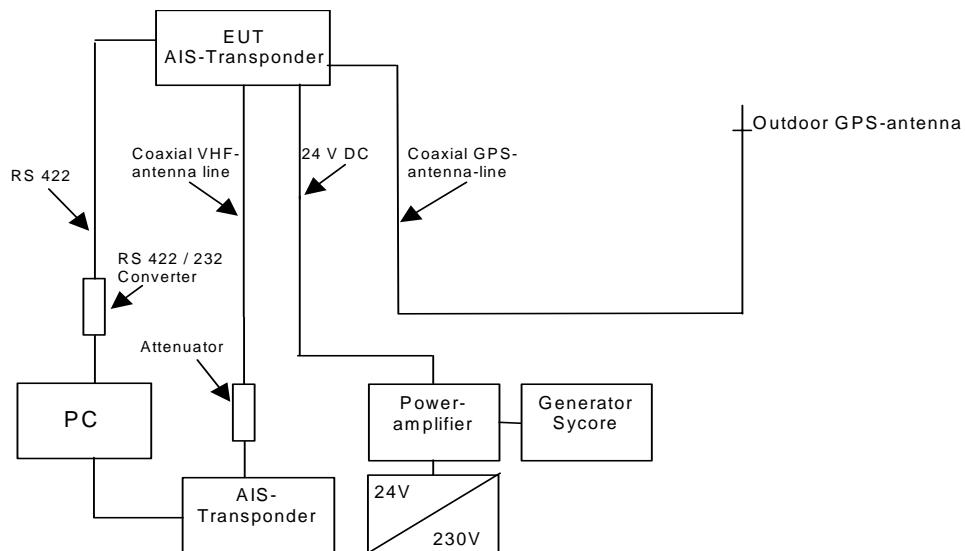

Measuring devices: Power amplifier PAS 5000 (PM-Nr. 480357)

Generator SyCore (PM-Nr. 480356)


Software: Script Manager (PM-Nr. 480114)

Measuring records:

Date of test:	9 Sept 2002	
Test level:	50Hz – 10kHz, 3V <sub>eff</sub> , max 2W	
Sweep range:	1,5 x 10 <sup>-3</sup> dec/s (1% / 3s)	
Test duration:	1s	
Coupling to	EUT reaction	Result
24 V DC	No reaction detected	B

Test result:

The requirements made in the test documents were fulfilled.

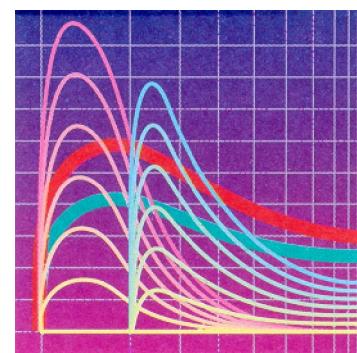


**PHOENIX  
TEST-LAB**

## 4.7 Power supply failure according to EN 60945 chapter 10.8

Test set-up:

- Table set-up
- The drawing below schematically shows the test set-up.
- Photos of the test set-up can also be referred to in the annex.

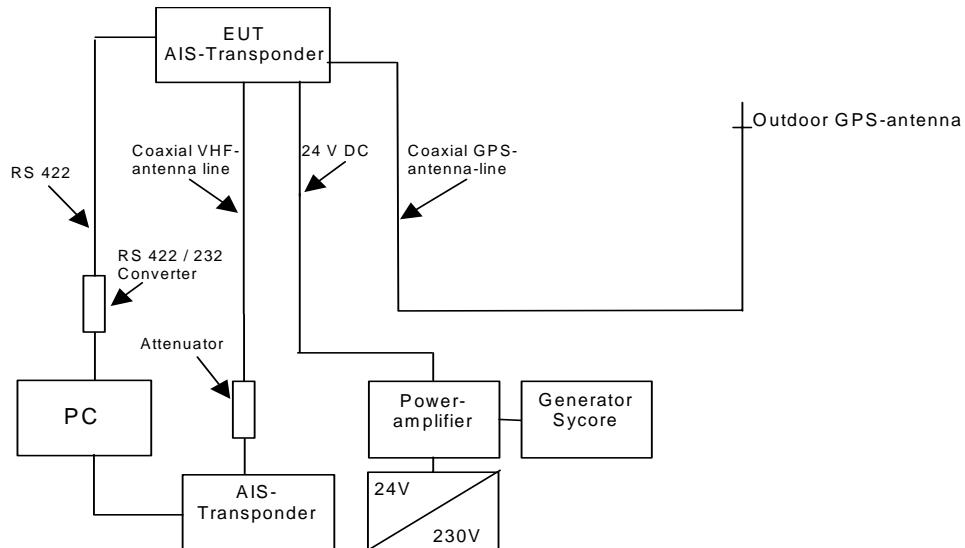


Measuring devices: Power amplifier PAS 5000 (PM-No. 480357)  
 Generator SyCore (PM-No. 480356)  
 Software: Script Manager (PM-No. 480114)

Measuring records:

Date of test:	9 Sept. 2002	
Test level:	3 interruptions of 60s within a 5-minute period	
Coupling to	EUT action	Result
24V DC	Automatic restart of the system, no user reaction necessary	B


Test result: The requirements made in the test documents were fulfilled.

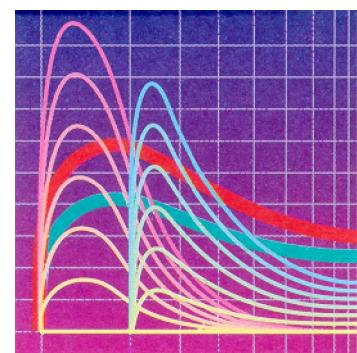

## 4.8 Power supply variations according to EN 60945 chapter 10.7

Test set-up:

- Table set-up
- The drawing below schematically shows the test set-up.

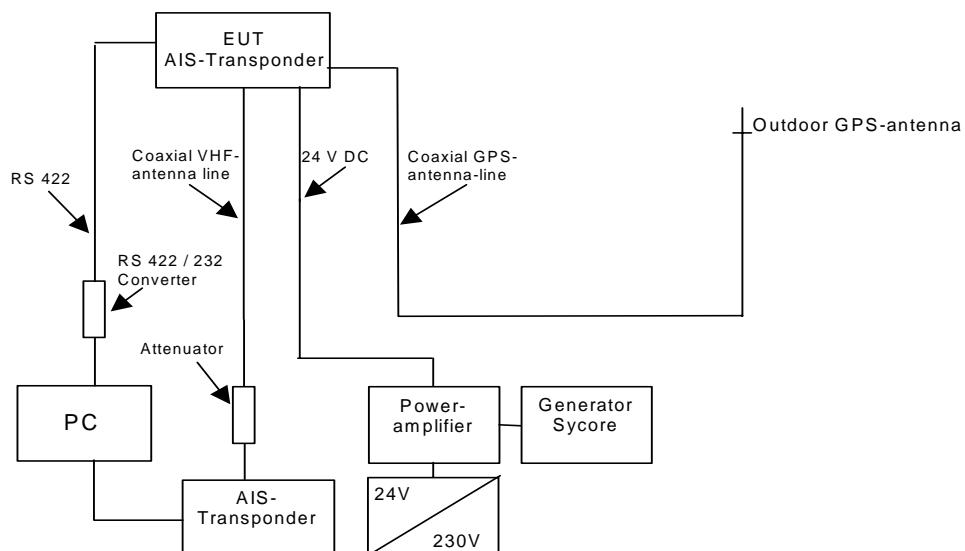


Measuring devices: power amplifier PAS 5000 (PM-No. 480357)  
 generator SyCore (PM-No. 480356)  
 software: Script Manager (PM-No. 480114)

Measuring records:

Date of test:	9 Sept. 2002		
Test basics:	Electrical supply – rectified alternating current		
Coupling to	Test level	EUT reaction	Result
24 V DC	U <sub>B</sub> +20% permanent	No reaction detectable	B
	U <sub>B</sub> -20% permanent	No reaction detectable	B

Test result: The requirements made in the test documents were fulfilled.

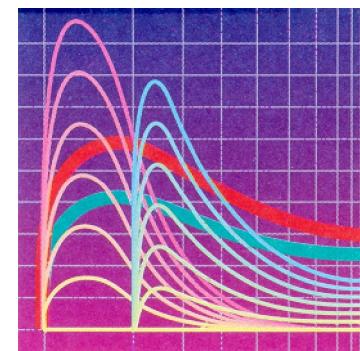


**PHOENIX  
TEST-LAB**

## 4.9 Excessive conditions according to EN 60945 chapter 5.2.3 (confusing of the DC-poles)

Test set-up:

- Table set-up
- The drawing below schematically shows the test set-up.

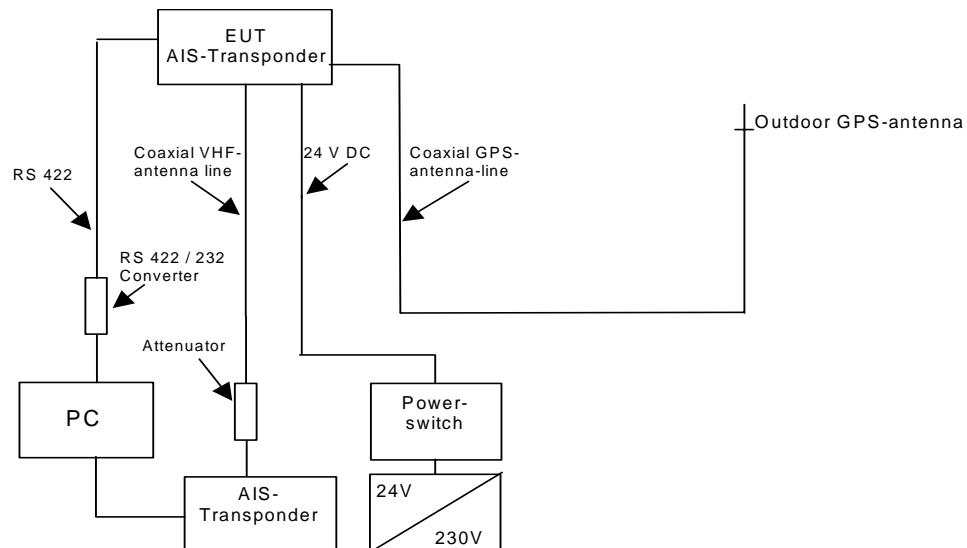


Measuring records:

Date of test:	9 Sept. 2002	
Test level:	Confusing the DC-poles for 5 minutes	
Coupling to	EUT action after test	Result
24V DC	Automatic restart after connecting the correct DC-poles, no user action necessary.	B

Test result:

**The requirements made in the test documents were fulfilled.**

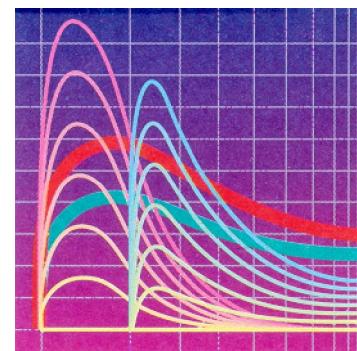

## 5 Annex

The annex consists of 16 pages and contains pictures of the test set-ups:

Pictures of the test set-up for electromagnetic radiation disturbances:

20608emi1.jpg, 20608emi2.jpg  
20608emi3.jpg, 20608emi4.jpg  
20608emi5.jpg

Pictures of the test set-up for mains terminal disturbance voltage on the V-LISN:

20608emiv1.jpg, 20608emiv2.jpg

Pictures of the test set-up for immunity to radio-frequency electromagnetic field:

20608ems1\_r1.jpg,  
20608ems1\_r2.jpg  
20608ems1\_r3.jpg  
20608ems\_c1.jpg  
20608ems\_c4.jpg

Pictures of the test set-up for conducted voltages:

Pictures of the test set-up for ESD:

20608esd1.jpg  
20608burst1.jpg  
20608surge1.jpg

Pictures of the test set-up for Burst:  
Pictures of the test set-up for Surge:

Pictures of the test set-up for harmonics and voltage fluctuation:

20608M3a.jpg