


File Name : J009965C

Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	1ms	AUTO	LN OFF
1M	10M	10k	9k	QP+AV	1ms	AUTO	LN OFF
10M	30M	50k	9k	QP+AV	1ms	AUTO	LN OFF

Final Measurement: x QP / + AV Transducer No. Start Stop Name
Meas Time: 1 s 2 150k 30M LIMITER
Subranges: 15
Acc Margin: 30dB

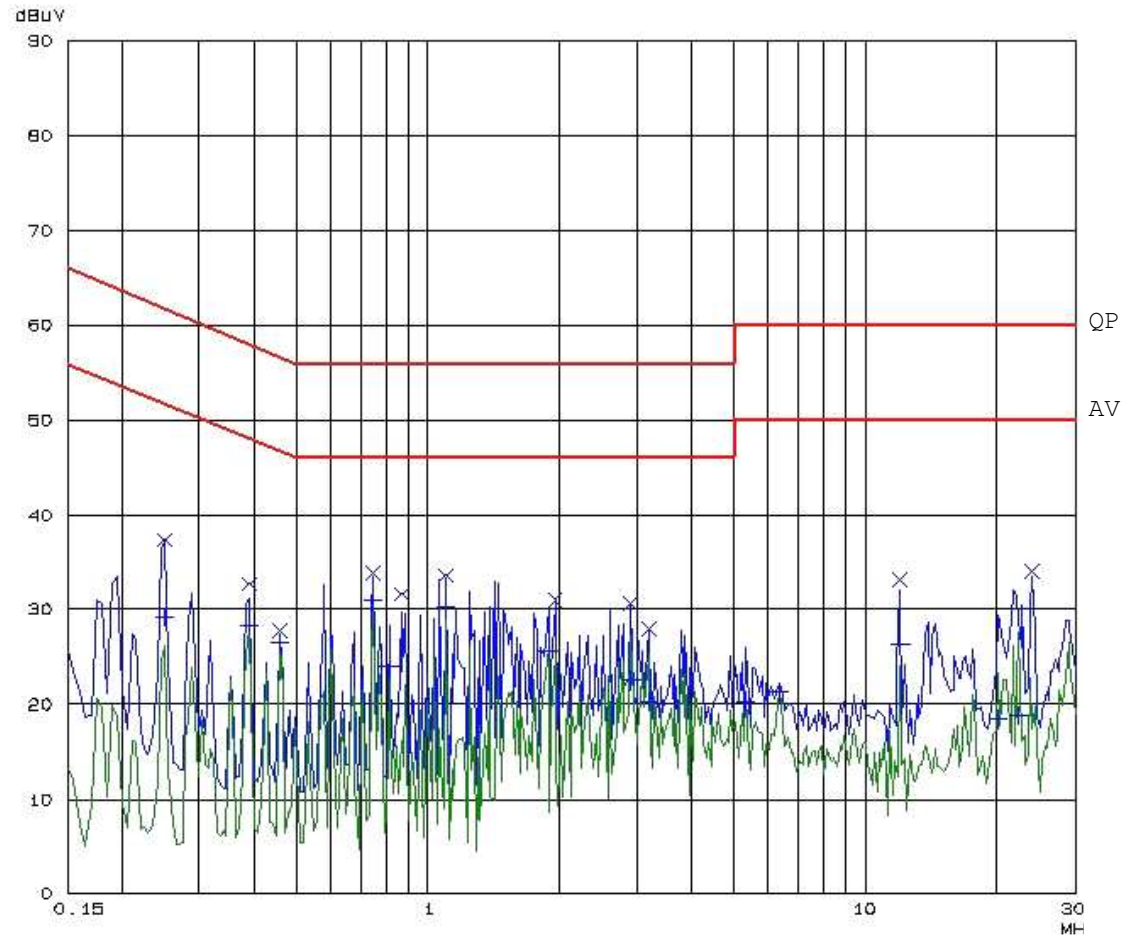

File Name :J009965C

Date: 04-11-04 16:17

Final Measurement Results:

Indicated Phase/PE shows Configuration of max. Emission

Frequency:	QP Level: dB	Delta Limit: dB	Phase:	PE:
250.00 kHz	37.3	-24.5	L1	fl
390.00 kHz	32.7	-25.4	N	fl
460.00 kHz	27.8	-29.0	N	fl
745.00 kHz	33.8	-22.2	L1	fl
870.00 kHz	31.6	-24.4	N	fl
1.10000 MHz	33.6	-22.5	L1	fl
1.95000 MHz	31.0	-25.0	L1	fl
2.90000 MHz	30.6	-25.4	L1	fl
3.19000 MHz	28.0	-28.0	L1	fl
12.00000 MHz	33.2	-26.8	N	fl
24.00000 MHz	34.1	-25.9	L1	fl

Frequency:	AV Level: dB	Delta Limit: dB	Phase:	PE:
250.00 kHz	29.2	-22.6	L1	fl
390.00 kHz	28.4	-19.7	L1	fl
460.00 kHz	26.5	-20.3	L1	fl
745.00 kHz	30.9	-15.1	L1	fl
815.00 kHz	24.1	-21.9	L1	fl
1.10000 MHz	30.3	-15.7	L1	fl
1.88000 MHz	25.7	-20.4	L1	fl
2.90000 MHz	22.5	-23.5	L1	fl
3.19000 MHz	20.2	-25.8	L1	fl
5.32000 MHz	20.3	-29.7	L1	fl
6.33000 MHz	21.3	-28.7	N	fl
12.00000 MHz	26.5	-23.6	N	fl
20.10000 MHz	18.5	-31.6	L1	fl
22.35000 MHz	18.8	-31.2	N	fl