



DATE: 19 November 2013

I.T.L. (PRODUCT TESTING) LTD.
FCC Radio Test Report
for
Cardo Peripheral Systems

Equipment under test:
Rider Communication System

**Cardo SHO-1
2401 MHz Transmitter**

Written by: R. Pinchuck

R. Pinchuck, Documentation

Approved by: A. Sharabi

A. Sharabi, Test Engineer

Approved by: I. Raz

I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



Measurement/Technical Report for Cardo Peripheral Systems

Rider Communication System

Cardo SHO-1

FCC ID: Q95ER17

IC: 4668A-ER17

19 November 2013

This report concerns: Original Grant:

Class I Change:

Class II Change:

Equipment type: Digital Transmission System

Limits used: 47CFR15 Section 15.247

Measurement procedure used is KDB 558074 D01 April 9, 2013 and ANSI C63.4-2003.

Application for Certification
prepared by:

R. Pinchuck

ITL (Product Testing) Ltd.

1 Bat Sheva St.

Lod 7116002

Israel

e-mail Rpinchuck@itl.co.il

Applicant for this device:
(different from "prepared by")

Avi Moato

Cardo Peripheral Systems

13 Hamifal St.,

Or Yehuda, 60221, Israel

Tel: +972-3-735-3111

Fax: +972-3562-3360

e-mail: moato@cardosystems.com

TABLE OF CONTENTS

1. GENERAL INFORMATION -----	5
1.1 Administrative Information.....	5
1.2 List of Accreditations	6
1.3 Product Description	7
1.4 Test Methodology	7
1.5 Test Facility	7
1.6 Measurement Uncertainty	7
2. SYSTEM TEST CONFIGURATION-----	8
2.1 Justification.....	8
2.2 EUT Exercise Software	8
2.3 Special Accessories	8
2.4 Equipment Modifications	8
2.5 Configuration of Tested System.....	9
3. RADIATED MEASUREMENT TEST SET-UP PHOTO -----	10
4. 6 DB MINIMUM BANDWIDTH -----	12
4.1 Test procedure	12
4.2 Results table.....	13
4.3 Test Equipment Used.....	14
5. 26 DB MINIMUM BANDWIDTH-----	15
5.1 Test procedure	15
5.2 Results table.....	16
5.3 Test Equipment Used.....	17
6. MAXIMUM TRANSMITTED PEAK POWER OUTPUT -----	18
6.1 Test procedure	18
6.2 Results table.....	21
6.3 Test Equipment Used.....	22
7. BAND EDGE SPECTRUM -----	23
7.1 Test procedure	23
7.2 Results table.....	26
7.3 Test Equipment Used.....	27
8. RADIATED EMISSION, 9 KHZ – 30 MHZ -----	28
8.1 Test Specification	28
8.2 Test Procedure	28
8.3 Measured Data	28
8.4 Test Instrumentation Used, Radiated Measurements.....	29
8.5 Field Strength Calculation	30
9. SPURIOUS RADIATED EMISSION, 30 – 25000 MHZ -----	31
9.1 Radiated Emission 30-25000 MHz.....	31
9.2 Test Data.....	32
9.3 Test Instrumentation Used, Radiated Measurements Above 1 GHz	35
10. TRANSMITTED POWER DENSITY -----	36
10.1 Test procedure	36
10.2 Results table.....	37
10.3 Test Equipment Used.....	38
11. ANTENNA GAIN/INFORMATION-----	39
12. AVERAGE FACTOR CALCULATION -----	40
12.1 Test Equipment Used, Average Factor Calculation	41
13. R.F EXPOSURE/SAFETY-----	42



14. APPENDIX A - CORRECTION FACTORS -----	44
14.1 Correction factors for CABLE	44
14.2 Correction factors for CABLE	45
14.3 Correction factors for CABLE	46
14.4 Correction factors for CABLE	47
12.6 Correction factors for LOG PERIODIC ANTENNA	48
14.5 Correction factors for LOG PERIODIC ANTENNA	49
14.6 Correction factors for BICONICAL ANTENNA	50
14.7 Correction factors for BICONICAL ANTENNA	51
14.8 Correction factors for Double-Ridged Waveguide Horn.....	52
14.9 Correction factors for Horn Antenna	53
14.10 Correction factors for Horn Antenna	54
14.11 Correction factors for ACTIVE LOOP ANTENNA	55
15. COMPARISON INDUSTRY CANADA REQUIREMENTS WITH FCC -----	56



1. General Information

1.1 *Administrative Information*

Manufacturer: Cardo Peripheral Systems

Manufacturer's Address: 13 Hamifal St.,
Or Yehuda, 60221
Israel

Tel: +972-3-735-3111

Fax: +972-3562-3360

Manufacturer's Representative: Avi Moato

Equipment Under Test (E.U.T): Rider Communication System

Equipment Model No.: Cardo SHO-1

Equipment Serial No.: Not designated

Date of Receipt of E.U.T: 09.09.13

Start of Test: 09.09.13

End of Test: 09.10.13

Test Laboratory Location: I.T.L (Product Testing) Ltd.
Kfar Bin Nun,
ISRAEL 99780

Test Specifications: FCC Part 15, Subpart C
RSS-210, Issue 8, 2010



1.2 *List of Accreditations*

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 **Product Description**

The Cardo SHO-1 was custom-designed to offer SHOEI enthusiasts a communication system that meets the highest standards.

Just like your trusted SHOEI helmet, the new Cardo SHO-1 is an extraordinary piece of equipment. With its unique and patented modular architecture, the SHO-1 integrates seamlessly with the SHOEI helmet design⁽¹⁾. On the inside, the SHO-1 houses the most advanced communication technology, including an unmatched plethora of features and functions. On the outside, it offers a streamlined and discreet appearance, including a replaceable battery for those extra-long-riding tours.

SHOEI riders will appreciate the voice-controlled operation of the cardo SHO-1. Not only will their hands remain on the handlebar for extra safety, but using the system also means natural and intuitive operation of this extremely feature-rich device. Among others, the Cardo SHO-1 offers voice controlled intercom calls with up to 8 additional riders or 4-Way intercom conferencing within a 1.6 km⁽²⁾ range.

And there is more: Riders can connect two mobile phones simultaneously and talk hands-free. Streaming stereo music from any *Bluetooth*[®] enabled smartphone or MP3 player is a breeze and so is the ability to receive in-the-ear navigation instructions from your GPS. With the built-in FM radio, you can also stay up-to-date with the latest traffic and weather reports from local radio stations.

The unique Cardo Community[®] web platform allows riders to invite fellow bikers for a ride, plan and join tours, and personalize the device settings to get the most out of your riding experience. When on the road, you can use Cardo's exclusive SmartSet Android[™] app (available free via Google Play⁽³⁾) to easily modify your SHO-1 settings from any *Bluetooth*[®] enabled Android device.

Lastly, the Cardo SHO-1's upgradable software⁽⁴⁾ will ensure you remain at the forefront of technology.

1.4 **Test Methodology**

Radiated testing was performed according to the procedures in KDB 558074 D01 April 9, 2013 and ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 **Test Facility**

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing September 3, 2009).

I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 **Measurement Uncertainty**

Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.98 dB

Note: See ITL Procedure No. PM 198.



2. System Test Configuration

2.1 ***Justification***

Unit was tested at installation position while transmitting continuously at the frequency of 2401MHz which is the only operational channel. Both operational modulations 2FSK and MSK was evaluated separately.

2.2 ***EUT Exercise Software***

No special exercise software was used.

2.3 ***Special Accessories***

No special accessories were needed to achieve compliance.

2.4 ***Equipment Modifications***

No modifications were necessary in order to achieve compliance.



2.5 Configuration of Tested System



Figure 1. Configuration of Tested System

3. Radiated Measurement Test Set-up Photo



Figure 2. Radiated Emission Test



Figure 3. Radiated Emission Test



Figure 4. Radiated Emission Test



Figure 5. Radiated Emission Test

4. 6 dB Minimum Bandwidth

4.1 Test procedure

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

The E.U.T was tested at the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in *Figure 1*.

The spectrum bandwidth of the E.U.T. at the point of 6 dB below maximum peak power was measured and recorded.

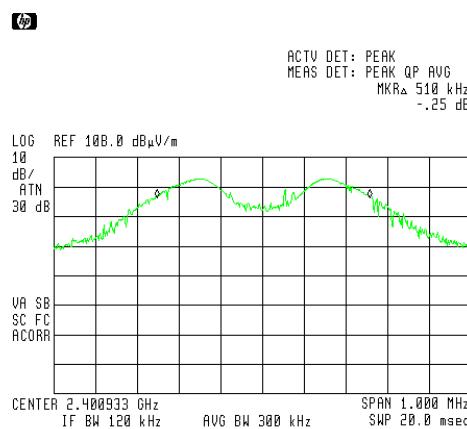


Figure 6 — 2401MHz Channel, 2FSK

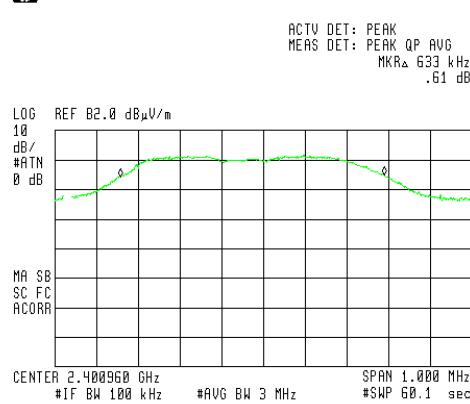


Figure 7 — 2401MHz Channel, MSK



4.2 Results table

E.U.T Description: Rider Communication System

Model No.: Cardo SHO-1

Serial Number: Not designated

Specification: F.C.C. Part 15, Subpart C: (15.247-a2)

Operation Frequency (MHz)	Modulation	Reading (MHz)	Specification (MHz)
2401.00	2FSK	0.51	0.5
2401.00	MSK	0.63	0.5

Figure 8 6 dB Minimum Bandwidth

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature: 

Date: 09.12.13

Typed/Printed Name: A. Sharabi



4.3 **Test Equipment Used.**

6 dB Minimum Bandwidth

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

Figure 9 Test Equipment Used

5. 26 dB Minimum Bandwidth

5.1 Test procedure

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

The E.U.T was tested at the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in *Figure 1*.

The spectrum bandwidth of the E.U.T. at the point of 26 dB below maximum peak power was measured and recorded.

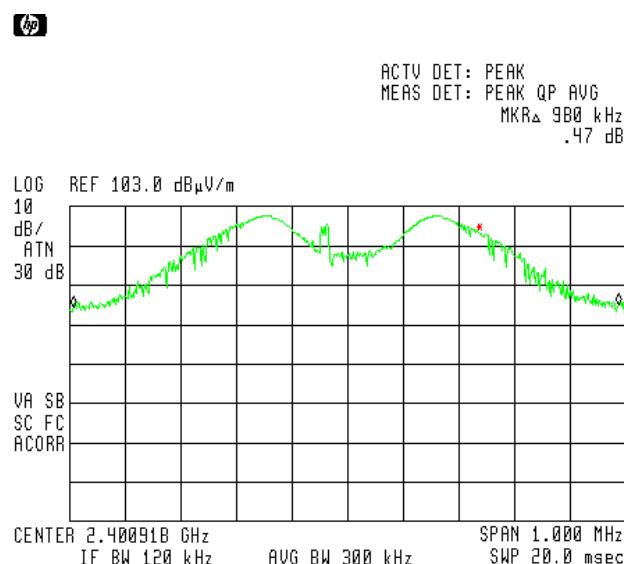


Figure 10 — 2401MHz Channel, 2FSK

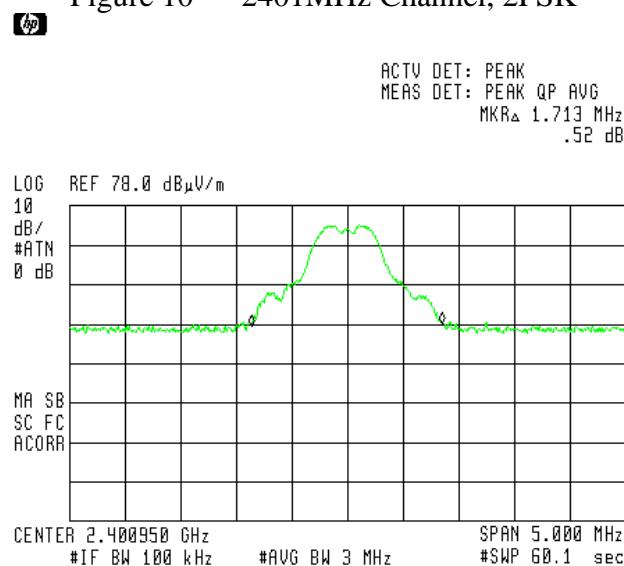


Figure 11 — 2401MHz Channel, MSK



5.2 Results table

E.U.T Description: Rider Communication System

Model No.: Cardo SHO-1

Serial Number: Not designated

Specification: F.C.C. Part 15, Subpart C: (15.247-a2)

Operation Frequency (MHz)	Modulation	Reading (MHz)
2401.00	2FSK	0.98
2401.00	MSK	1.71

Figure 12 26 dB Minimum Bandwidth

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature:  Date: 09.12.13

Typed/Printed Name: A. Sharabi



5.3 **Test Equipment Used.**

26 dB Minimum Bandwidth

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

Figure 13 Test Equipment Used



6. Maximum Transmitted Peak Power Output

6.1 ***Test procedure***

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

The E.U.T was tested at the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

Radiated output power levels were measured at selected operation frequencies and the results were converted to power level according to the formula as shown below:

$$P = \frac{(E_{V/m} \times d)^2}{(30 \times G)} \quad [W]$$

E - Field Strength (V/m)

d – Distance from transmitter (m)

G – Antenna gain

P – Peak power (W)

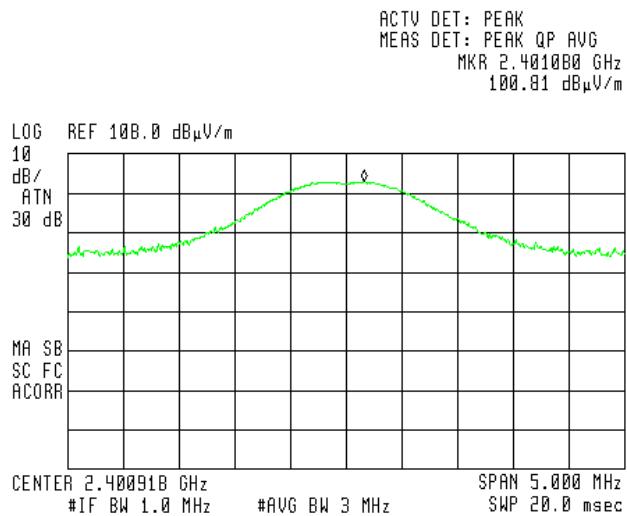


Figure 14 , 2401MHz channel , 2FSK, Horizontal

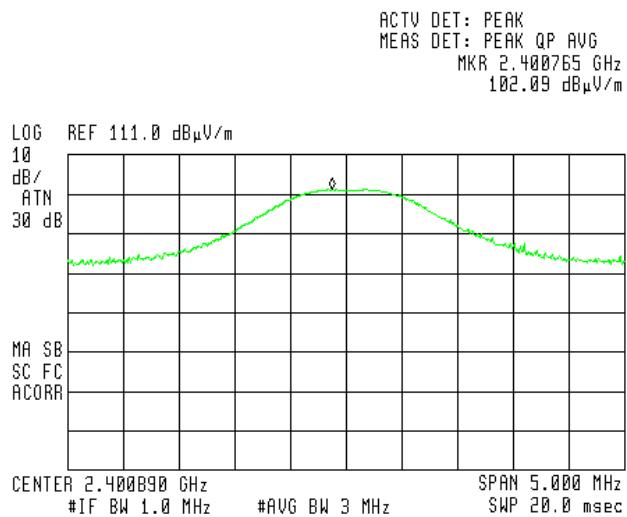


Figure 15 , 2401MHz channel , 2FSK, Vertical

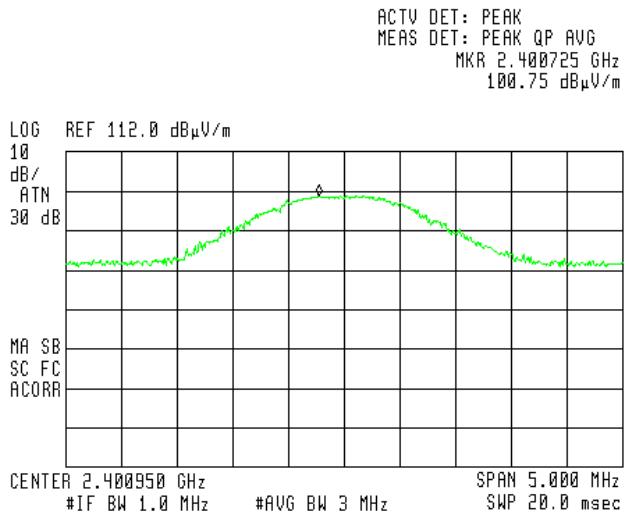


Figure 16 , 2401MHz channel , MSK, Vertical

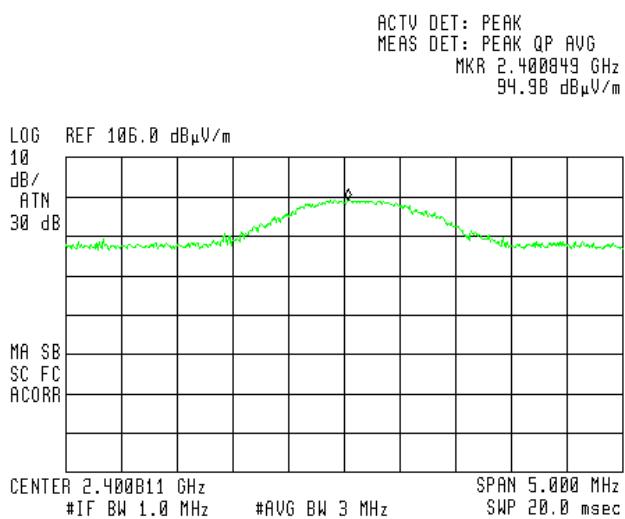


Figure 17 , 2401MHz channel , MSK, Horizontal



6.2 Results table

E.U.T. Description: Rider Communication System

Model No.: Cardo SHO-1

Serial Number: Not designated

Specification: F.C.C. Part 15, Subpart C Section 15.247(b)

Operation Frequency (MHz)	Antenna Polarization	Modulation	Power (dBuV/m)	Power (mW)	Specification (mW)	Margin (mW)
2401.00	V	2FSK	102.09	4.8	1000	-995.2
2401.00	H	2FSK	100.81	3.6	1000	-996.4
2401.00	V	MSK	100.75	3.6	1000	-996.4
2401.00	H	MSK	94.98	0.94	1000	-999.06

Figure 18 Maximum Peak Power Output

JUDGEMENT: Passed by 995.2 mW

TEST PERSONNEL:

Tester Signature:

Date: 09.12.13

Typed/Printed Name: A. Sharabi



6.3 Test Equipment Used.

Peak Power Output

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 19 Test Equipment Used

7. Band Edge Spectrum

[In Accordance with section 15.247(c)]

7.1 Test procedure

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

The E.U.T was tested at the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

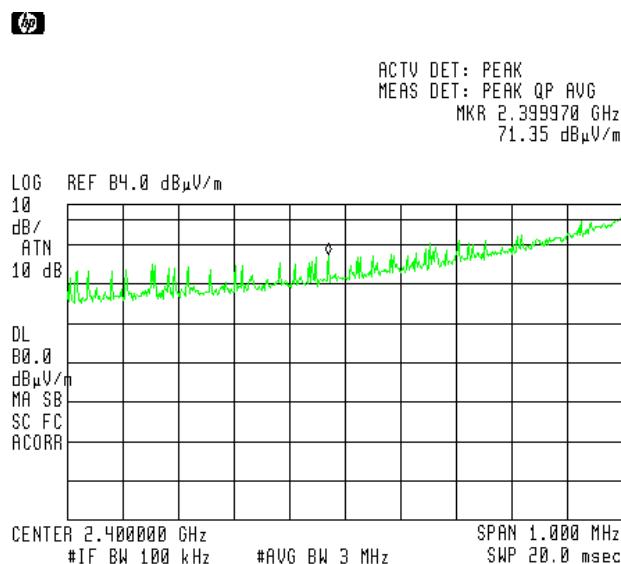


Figure 20 —Lower Band Edge, 2FSK

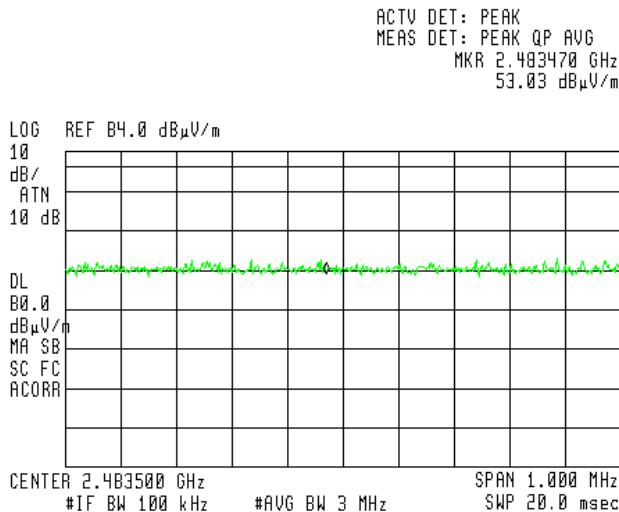


Figure 21 —Upper Band Edge, 2FSK

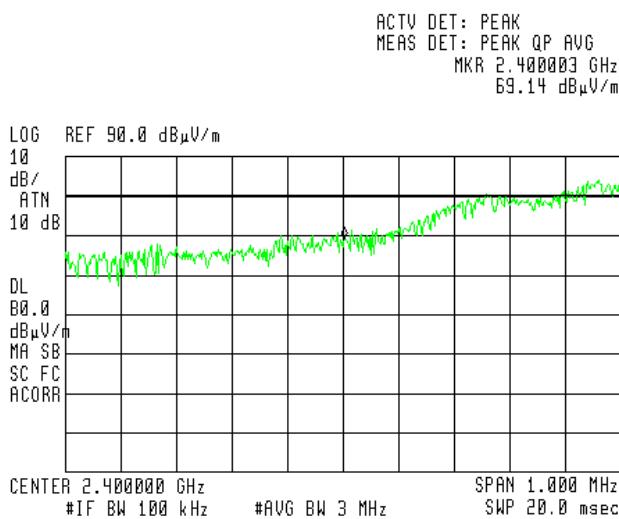


Figure 22 —Lower Band Edge, MSK

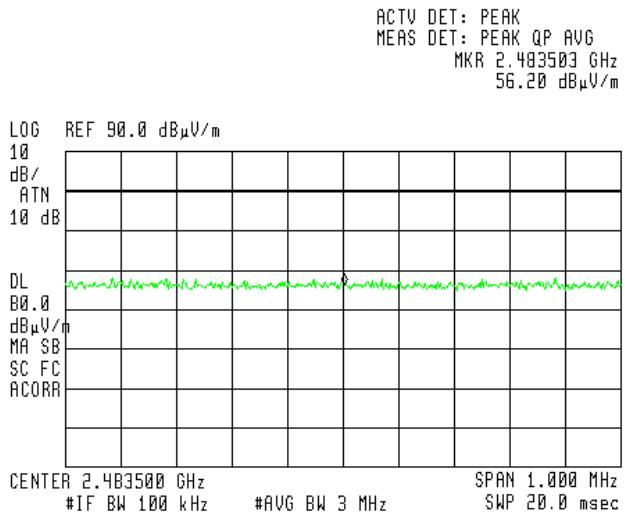


Figure 23 —Upper Band Edge, MSK



7.2 Results table

E.U.T. Description: Rider Communication System

Model No.: Cardo SHO-1

Serial Number: Not designated

Specification: F.C.C. Part 15, Subpart C (15.247)

Operation Frequency (MHz)	Modulation	Band Edge Frequency (MHz)	Spectrum Level (dBc)	Specification (dBc)	Margin (dB)
2401.0	2FSK	2400.0	71.35	80.0	-8.65
2401.0	2FSK	2483.5	53.03	80.0	-26.97
2401.0	MSK	2400.0	69.14	80.0	-10.86
2401.0	MSK	2483.5	56.20	80.0	-23.8

Figure 24 Band Edge Spectrum

JUDGEMENT: Passed by 8.65 dB

TEST PERSONNEL:

Tester Signature: Date: 09.12.13

Typed/Printed Name: A. Sharabi



7.3 Test Equipment Used.

Band edge Spectrum

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

Figure 25 Test Equipment Used



8. Radiated Emission, 9 kHz – 30 MHz

8.1 ***Test Specification***

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

8.2 ***Test Procedure***

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying with CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 3 meters.

The E.U.T. was operated at the low, mid and high channels using a peak detector.

8.3 ***Measured Data***

JUDGEMENT: Passed by more than 20dB.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 209 specification.

TEST PERSONNEL:

Tester Signature: 

Date: 09.12.13

Typed/Printed Name: A. Sharabi



8.4 **Test Instrumentation Used, Radiated Measurements**

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 year
RF Section	HP	85420E	3705A00248	February 26, 2013	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 21, 2012	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A



8.5 **Field Strength Calculation**

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ V/m]

RA: Receiver Amplitude [dB μ V]

AF: Receiving Antenna Correction Factor [dB/m]

CF: Cable Attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

No external pre-amplifiers are used.

9. Spurious Radiated Emission, 30 – 25000 MHz

9.1 Radiated Emission 30-25000 MHz

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in *Figure 1*.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

In the frequency range 1-2.9 GHz, a computerized EMI receiver complying with CISPR 16 requirements was used.

In the frequency range 2.9-25.0 GHz, a spectrum analyzer including a low noise amplifier was used. During average measurements, the IF bandwidth was 1 MHz and the video bandwidth was 100Hz. During peak measurements, the IF bandwidth was 1 MHz and the video bandwidth was 3 MHz.

The test distance was 3 meters.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The E.U.T. was operated at the low, mid and high channels using a peak detector.



9.2 **Test Data**

JUDGEMENT: Passed by 4.6dB

For the operation frequency of 2401 MHz, the margin between the emission level and the specification limit is in the worst case 0.4 dB at the frequency of 4802.0 MHz, vertical polarization.

The results for all modulations were the same.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

The details of the highest emissions are given in *Figure 26* to *Figure 27*.

TEST PERSONNEL:

Tester Signature: 

Date: 09.12.13

Typed/Printed Name: A. Sharabi



Radiated Emission Above 1 GHz

E.U.T Description Rider Communication System
Type Cardo SHO-1
Serial Number: Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Peak
Operation Frequency: 2401 MHz

Freq. (MHz)	Polarity (H/V)	Peak Amp (dB μ V/m)	Peak. Specification (dB μ V/m)	Peak. Margin (dB)
2390.0	H	56.3	74.0	-17.7
2390.0	V	58.9	74.0	-15.1
4802.0	H	56.4	74.0	-17.6
4802.0	V	59.2	74.0	-14.8
7203.0	H	68.5	82.0	-13.5
7203.0	V	71.7	82.0	-10.3
2483.5	H	45.9	74.0	-28.1
2483.5	V	47.0	74.0	-27.0

**Figure 26. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Radiated Emission Above 1 GHz

E.U.T Description Rider Communication System
Type Cardo SHO-1
Serial Number: Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Average
Operation Frequency: 2401 MHz

Freq. (MHz)	Polarity (H/V)	Average Amp (dB μ V/m)	Average Specification (dB μ V/m)	Peak. Margin (dB)
2390.0	H	50.7	54.0	-3.3
2390.0	V	53.3	54.0	-0.7
4802.0	H	50.8	54.0	-3.2
4802.0	V	53.6	54.0	-0.4
7203.0	H	N/A	N/A	N/A
7203.0	V	N/A	N/A	N/A
2483.5	H	40.3	54.0	-13.7
2483.5	V	41.4	54.0	-12.6

**Figure 27. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



9.3 **Test Instrumentation Used, Radiated Measurements Above 1 GHz**

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

10. Transmitted Power Density

[In accordance with section 15.247(d)]

10.1 Test procedure

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

The E.U.T was tested at the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in *Figure 1*.

The spectrum analyzer was set to 3 kHz resolution BW and sweep time of 1 second for each 3 kHz “window”. The spectrum peaks were located at each of the 3 operating frequencies.

$$P = \frac{(E_{V/m} \times d)^2}{(30 \times G)} \quad [\text{W}]$$

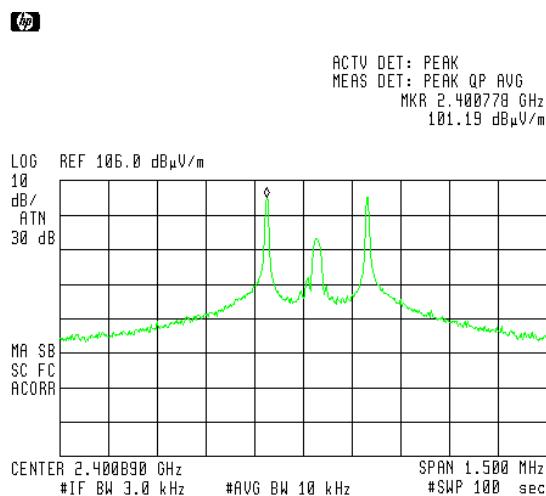


Figure 28 — 2401MHz Channel, 2FSK, Vertical

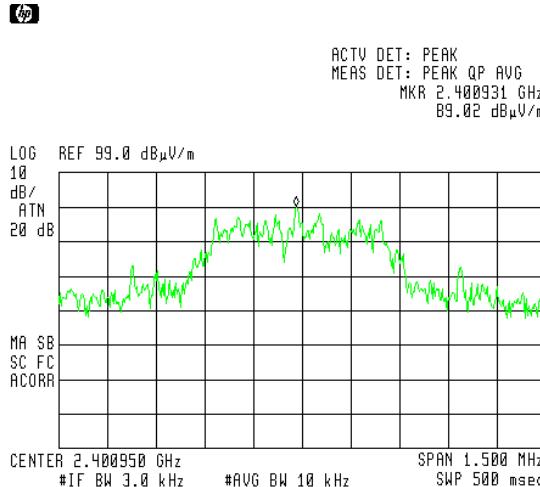


Figure 29 — 2401MHz Channel, MSK, Vertical

10.2 Results table

E.U.T. Description: Rider Communication System

Model No.: Cardo SHO-1

Serial Number: Not designated

Specification: F.C.C. Part 15, Subpart C (15.247)

Operation Frequency (MHz)	Modulation	Reading Spectrum Analyzer (dBµV/m)	Reading Spectrum Analyzer (mW)	Specification (mW)	Margin (mW)
2401.0	2FSK	101.19	4.0	6.3	-2.3
2401.0	MSK	89.02	0.24	6.3	-6.06

Figure 30 Test Results

JUDGEMENT: Passed by 2.3 mW

TEST PERSONNEL:

Tester Signature: A. Sharabi

Date: 09.12.13

Typed/Printed Name: A. Sharabi



10.3 **Test Equipment Used.**

Transmitted Power Density

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

Figure 31 Test Equipment Used



11. Antenna Gain/Information

The antenna gain is 0 dBi, integral.

12. Average Factor Calculation

1. Burst duration = 52.5msec
2. Time between bursts = 120msec
3. Pulse duration = N/A
4. pulse period = N/A

$$5. \text{ Average Factor} = 20 \log \left[\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100 \text{msec}} \times \text{Num of burst within 100msec} \right]$$

$$\text{Average Factor} = 20 \log \left[\frac{52.5}{100} \right] = -5.6 \text{dB}$$

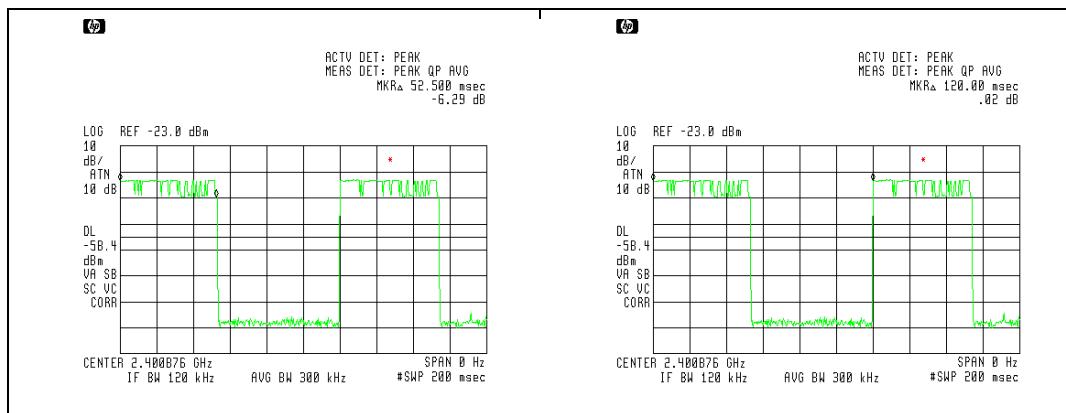


Figure 32. Duty Cycle



12.1 Test Equipment Used, Average Factor Calculation

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A



13. R.F Exposure/Safety

Typical use of the E.U.T. is as a Rider Communication System.

The typical placement of the E.U.T. is on the outside of a motorcycle helmet (See photo below). The typical distance between the E.U.T. and the user in the worst case application, is 3 cm.

Calculation of Maximum Permissible Exposure (MPE)

Based on Section 1.1310 Requirements

(a) FCC limits at 2401 MHz is: $1 \frac{mW}{cm^2}$

Using table 1 of Section 1.1310 limit for general population/uncontrolled exposures, the above level is an average over 30 minutes.

(b) The power density produced by the E.U.T. is

$$S = \frac{P_t G_t}{4\pi R^2}$$

P_t- Transmitted Power 102.09 dBuV/m (Peak) = 4.8mW


G_T- Antenna Gain, 0 dBi = 1 numeric

R- Distance from Transmitter using 3cm worst case

(c) The peak power density is:

$$S_{Avg} = \frac{(4.8 \times 1)}{4\pi(3)^2} = 0.42 \frac{mW}{cm^2}$$

(d) This is below the FCC limit.

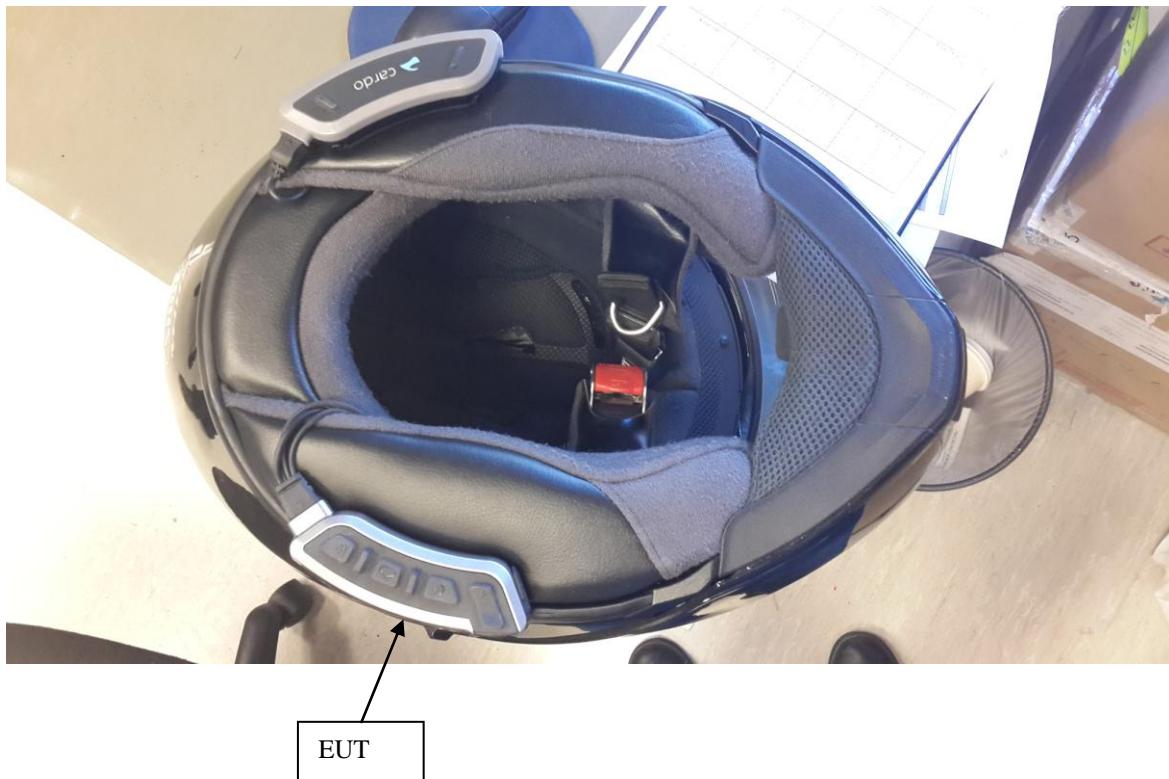



14. APPENDIX A - CORRECTION FACTORS

14.1 *Correction factors for CABLE* *from EMI receiver to test antenna at 3 meter range.*

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".



**14.2 Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.**

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

- 1. The cable type is RG-8.*
- 2. The overall length of the cable is 10 meters.*



14.3 Correction factors for

CABLE

from spectrum analyzer
to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.



14.4 Correction factors for

CABLE

from EMI receiver
to test antenna
at 10 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3
20.0	0.8
30.0	0.9
40.0	1.2
50.0	1.4
60.0	1.6
70.0	1.8
80.0	1.9
90.0	2.0
100.0	2.1
150.0	2.6
200.0	3.2
250.0	3.8
300.0	4.2
350.0	4.6
400.0	5.1
450.0	5.3
500.0	5.6
600.0	6.3
700.0	7.0
800.0	7.6
900.0	8.0
1000.0	8.7

FREQUENCY (MHz)	CORRECTION FACTOR (dB)
1200.0	9.8
1400.0	10.0
1600.0	11.3
1800.0	12.2
2000.0	13.1
2300.0	14.5
2600.0	15.9
2900.0	16.4

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 34 meters.
3. The above data is located in file 34M10MO.CBL on the disk marked "Radiated Emissions Tests EMI Receiver".



12.6 Correction factors for LOG PERIODIC ANTENNA

Type LPD 2010/A
at 3 and 10 meter ranges.

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range, and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission Test EMI Receiver".



14.5 Correction factors for

LOG PERIODIC ANTENNA

Type SAS-200/511
at 3 meter range.

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".



**14.6 Correction factors for BICONICAL ANTENNA
Type BCD-235/B,
at 3 meter range**

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".



**14.7 Correction factors for BICONICAL ANTENNA
Type BCD-235/B,
10 meter range**

FREQUENCY (MHz)	AFE (dB/m)
30.0	12.1
40.0	10.6
50.0	10.6
60.0	8.9
70.0	8.5
80.0	9.6
90.0	9.4
100.0	9.6
110.0	10.3
120.0	10.7
130.0	12.6
140.0	12.7
150.0	12.7
160.0	13.8
170.0	13.7
180.0	14.9
190.0	13.4
200.0	13.1
210.0	14.0
220.0	14.5
230.0	15.8
240.0	16.0
250.0	16.6
260.0	16.7
270.0	18.3
280.0	18.5
290.0	19.3
300.0	20.9

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 41BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".



**14.8 Correction factors for
Horn**

Double-Ridged Waveguide

**Model: 3115, S/N 29845
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENN A Gain (dBi)	FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENNA Gain (dBi)
1.0	24.8	5.4	10.0	38.8	11.4
1.5	26.1	7.6	10.5	38.9	11.8
2.0	28.6	7.7	11.0	39.0	12.1
2.5	29.8	8.4	11.5	39.6	11.8
3.0	31.4	8.4	12.0	39.8	12.0
3.5	32.4	8.7	12.5	39.6	12.5
4.0	33.7	8.6	13.0	40.0	12.5
4.5	33.4	9.9	13.5	39.8	13.0
5.0	34.5	9.7	14.0	40.2	13.0
5.5	35.1	9.9	14.5	40.6	12.9
6.0	35.4	10.4	15.0	41.3	12.4
6.5	35.6	10.8	15.5	39.5	14.6
7.0	36.2	10.9	16.0	38.8	15.5
7.5	37.3	10.4	16.5	40.0	14.6
8.0	37.7	10.6	17.0	41.4	13.4
8.5	38.3	10.5	17.5	44.8	10.3
9.0	38.5	10.8	18.0	47.2	8.1
9.5	38.7	11.1			



14.9 Correction factors for

Horn Antenna
Model: SWH-28
at 1 meter range.

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
18.0	40.3	16.1
19.0	40.3	16.3
20.0	40.3	16.1
21.0	40.3	16.3
22.0	40.4	16.8
23.0	40.5	16.4
24.0	40.5	16.6
25.0	40.5	16.7
26.0	40.6	16.4



14.10 Correction factors for

**Horn Antenna
Model: V637**

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
26.0	43.6	14.9
27.0	43.7	15.1
28.0	43.8	15.3
29.0	43.9	15.5
30.0	43.9	15.8
31.0	44.0	16.0
32.0	44.1	16.2
33.0	44.1	16.4
34.0	44.1	16.7
35.0	44.2	16.9
36.0	44.2	17.1
37.0	44.2	17.4
38.0	44.2	17.6
39.0	44.2	17.8
40.0	44.2	18.0



14.11 Correction factors for ACTIVE LOOP ANTENNA
Model 6502
S/N 9506-2950

FREQUENCY (MHz)	Magnetic Antenna Factor (dB)	Electric Antenna Factor (dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2



15. Comparison Industry Canada Requirements With FCC

Cardo Peripheral Systems M/N: Cardo SHO-1
IC: 4668A-ER17 FCC ID: Q95ER17

Test	FCC	IC
<input type="checkbox"/> Radiated Emission	15.209	RSS 210 Issue 8 Clause 2.5
<input type="checkbox"/> Max power / Peak power	15.247(b)(3)	RSS 210 Issue 8 A8.4(4)
<input type="checkbox"/> 6dB BW	15.247(a)2	RSS 210 Issue 8 A8.2a
<input type="checkbox"/> Power density	15.247(e)	RSS 210 Issue 8 A8.2b
<input type="checkbox"/> Spurious radiated emission in the restricted band	15.205(c)	RSS 210 Issue 8 2.5 RSS Gen 7.2.2 (Table 1)
<input type="checkbox"/> Band edge spectrum	15.247(d)	RSS 210 Issue 8 A8.5
<input type="checkbox"/> RF Exposure Limits	1.1310	RSS 102 4.4