



SAR TEST REPORT

Test Report No. : 26AE0244-HO-7a

Applicant : Welcat Inc.
Type of Equipment : Handy Terminal
Model No. : XIT-100-BW
Test standard : FCC47CFR 2.1093
FCC OET Bulletin 65, Supplement C
FCC ID : Q98XIT100BW
Test Result : Complied (IEEE 802.11b+Bluetooth)
Max. SAR Measured : 0.610W/kg (Body, 2412MHz)

1. This test report shall not be reproduced except full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with the above standard. We hereby certify that the data contain a true representation of the SAR profile.
4. The test results in this test report are traceable to the national or international standards.

Date of test : October 14, 21, 26, 28, November 16 2005

Tested by : H. Sato
Hisayoshi Sato
EMC Services

Approved by : T. Maeno
Tetsuo Maeno
Site Manager of EMC Services

CONTENTS	PAGE
SECTION 1 : Client information.....	3
SECTION 2 : Equipment under test (E.U.T.).....	3
2.1 Identification of E.U.T.	3
2.2 Product description	3
2.3 Antenna location.....	5
SECTION 3 : Test standard information.....	7
3.1 Requirements for compliance testing defined by the FCC	7
3.2 Exposure limit	8
SECTION 4 : Test result	9
4.1 Colocation of SAR value	9
4.2 Result of Max. SAR value.....	9
4.3 Test location	9
SECTION 5 : Operation of E.U.T. during testing.....	9
5.1 Operating modes.....	9
5.2 Measurement procedure	10
5.3 Test setup of EUT.....	11
SECTION 6 : Test surrounding.....	12
6.1 Measurement uncertainty	12
SECTION 7 : Confirmation before testing	13
7.1 Conducted power	13
7.2 Power drift measurement	14
SECTION 8 : Measurement results.....	15
8.1 SAR measurement results	15
APPENDIX 1 : Photographs of test setup.....	18
APPENDIX 2 : Test instruments.....	33
Equipment & calibration information	34
1. Equipment used.....	34
2. Dosimetry assessment setup.....	37
3. Configuration and peripherals.....	38
4. System components	39
5. Test system specifications.....	41
6. Simulated tissues composition of 2450MHz	42
7. Validation measurement	43
8. System validation data	44
9. Validation uncertainty	45
10. Validation measurement data	46
11. System Validation Dipole (D2450V2,S/N: 765).....	49
12. Dosimetric E-Field Probe Calibration (EX3DV3,S/N: 3507)	58
13. References.....	68
APPENDIX 3 : SAR Measurement data.....	69
1. Evaluation procedure	70
2. Measurement data of Wireless LAN	71
3. Measurement data of Bluetooth	82

SECTION 1 : Client information

Company Name	Welcat Inc.
Address	1-17-12 Shin Yokohama, Kouhoku-ku, Yokohama Kanagawa 222-0033 Japan
Telephone Number	+81-45-474-9806
Facsimile Number	+81-45-474-9816
Contact Person	Kaoru Nayuki

SECTION 2 : Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment	Handy Terminal
Model No.	XIT-100-BW
Serial No.	1(for Wireless LAN test) 2(for Bluetooth test)
Country of Manufacture	Japan
Rating	DC 3.7V, 0.5A
Receipt Date of Sample	October 14, 2005
Condition of EUT	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Category Identified	Portable device

2.2 Product description

2.2.1 General Information

Feature of EUT	The barcode handy terminal has WLAN module and Bluetooth module were built in.
Size	58 (W)*162 (H)*40 (D) mm
Range of operation temperature	-5 to +50 deg. C.
Operation Clock	Main board (3.6864MHz) (PLL : 99.5328MHz, 199.0656MHz) WLAN (22MHz) Bluetooth (16MHz)
Battery	Type : LITHIUMION BATTERY PACK Model Name : HBC-51 Rating =3.7V : 1100mAh

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

2.2.2 Radio specification / Wireless LAN (IEEE802.11b)

Equipment Type	Transceiver
Frequency band	2412-2462MHz
Bandwidth & Channel spacing	18MHz max & 5MHz
Type of Modulation	DSSS
Antenna Type	Modification dipole
Antenna Connector Type	W.FL (Hirose)
Antenna Gain	2.14dBi max (Not including cable loss)
Max. Output Power (Peak)	21.01dBm, 126.18mW
ITU code	11b : G1D
Mode of Operation	Simplex
Operating frequency	Synthesizer

2.2.3 Radio specification / Bluetooth

Equipment Type	Transceiver
Frequency band	2402-2480MHz
Bandwidth & Channel spacing	1MHz & 1MHz
Type of Modulation	FHSS
Antenna Type	Chip antenna
Antenna Connector Type	Nothing
Antenna Gain	0.2dBi (max)
Max. Output Power (Peak)	0.76dBm, 1.19mW
ITU code	F1D
Mode of Operation	Simplex
Operating frequency	Synthesizer

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116


Facsimile: +81 596 24 8124

2.3 Antenna location




Bluetooth Antenna

Wireless LAN Antenna

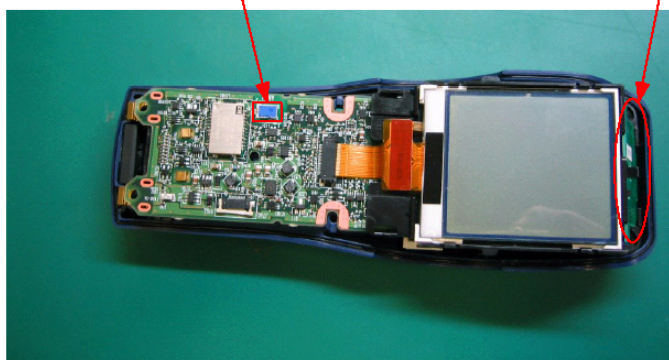


WLAN Antenna

Dimensions

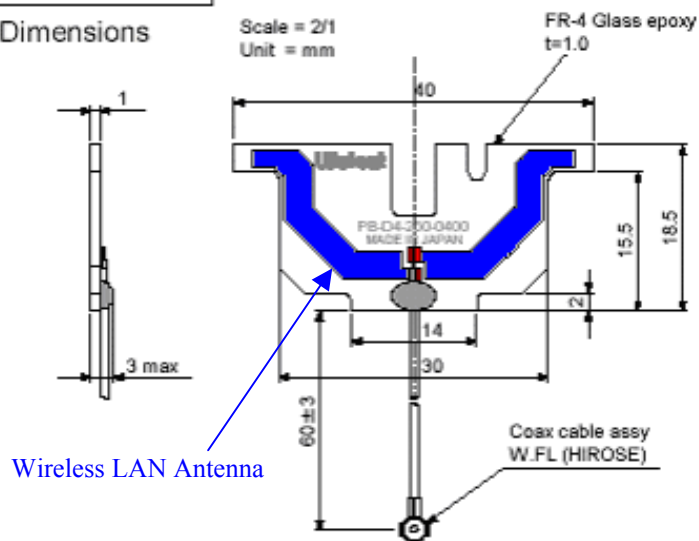

The diagram of the EUT(Handy Terminal) is shown as the following.

The shortest distance between the surface of EUT(Handy Terminal) and the Wireless LANAntenna is 5mm.

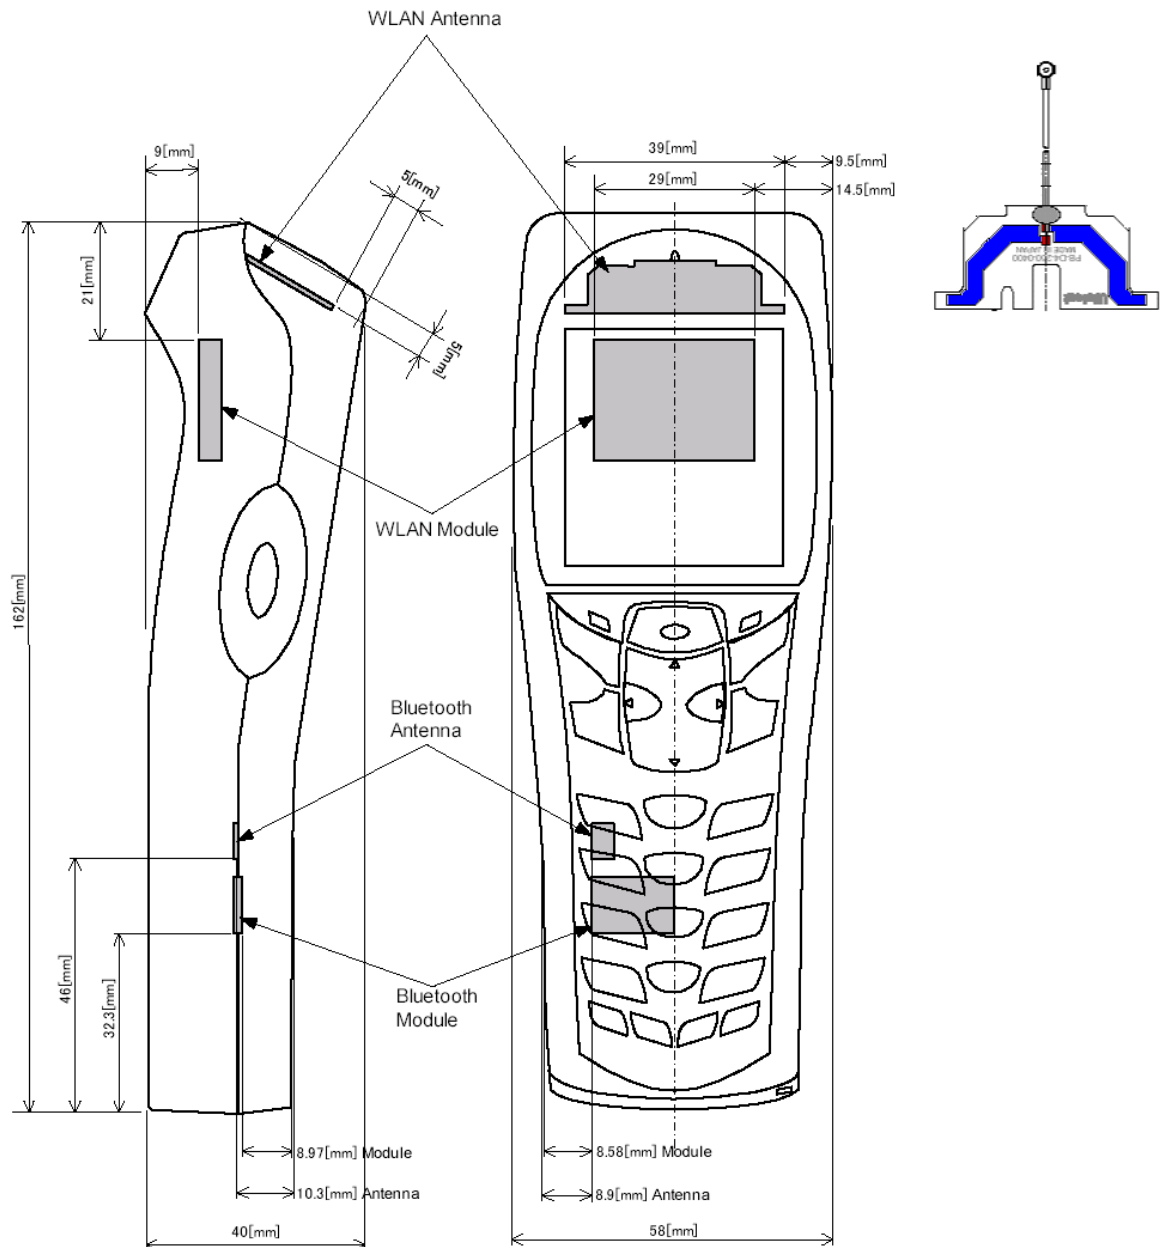

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 3 : Test standard information

3.1 Requirements for compliance testing defined by the FCC

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992. According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

1 Specific Absorption Rate (SAR) is a measure of the rate of energy absorption due to exposure to an RF transmitting source (wireless portable device).

2 IEEE/ANSI Std. C95.1-1992 limits are used to determine compliance with FCC ET Docket 93-62.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

3.2 Exposure limit

(A) Limits for Occupational/Controlled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.4	8.0	20.0

(B) Limits for General population/Uncontrolled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.08	1.6	4.0

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments: are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE:GENERAL POPULATION/UNCONTROLLED EXPOSURE SPATIAL PEAK(averaged over any 1g of tissue) LIMIT 1.6 W/kg

SECTION 4 : Test result

4.1 Colocation of SAR value

The distance of Wireless LAN Antenna and Bluetooth Antenna is within 20cm.
Therefore, as the worse case, the Max SAR value of EUT is a value in which the Max SAR values of IEEE 802.11b and Bluetooth are summed up as shown below.

Max. SAR Measured = Max SAR value (IEEE 802.11b) + Max SAR value (Bluetooth)

4.2 Result of Max. SAR value

Max. SAR Measured (IEEE 802.11b+ Bluetooth) : 0.6101 W/kg (Body, 2412MHz)
=0.609(IEEE 802.11b) + 0.0011(Bluetooth)

4.3 Test location

UL Apex Co., Ltd. Head Office EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116
Facsimile : +81 596 24 8124

SECTION 5 : Operation of E.U.T. during testing

5.1 Operating modes

Operation mode	The frequency band and the modulation used in this test are shown as a following. 1. IEEE 802.11b mode Frequency band : 2412-2462MHz Channel : Low ch(2412MHz), Mid ch(2437MHz), High ch(2462MHz) Modulation : 11b : DSSS (DBPSK, DQPSK, CCK) Crest factor : 1 * The test operation of the EUT was controlled by the PC. Therefore, we tested connecting the PC and the EUT. 2. Bluetooth mode Frequency band : 2402-2480MHz Channel : Low ch(2402MHz), Mid ch(2441MHz), High ch(2480MHz) Modulation : FHSS (GFSK Hopping ON / OFF) [DH5] Crest factor : 1
----------------	--

5.2 Measurement procedure

1. IEEE 802.11b

The 11b (DSSS) test was performed in the CCK(11Mbps) modulation because it was the highest peak power and data rate.

Step1. The searching for the worst position

Step2. The changing to the Low and High channels

This test was performed at the worst conditions of Step1.

2. Distance between EUT and SAM Twin Phantom

Step3. The measurement was performed with the distance, 5mm, 10mm and 15mm to check if the shortest distance (0mm) may not have the worst value at the conditions of the highest SAR value. As a result, the shortest distance (0mm) had the worst value.

3. Bluetooth

Step4. The searching for the worst position

Step5. The changing to the Low and High channels

This test was performed at the worst conditions of Step4.

Step6. Bluetooth Hopping ON

This test was performed at the worst conditions of Step4.

5.3 Test setup of EUT

When users operate or carry the EUT, it could be considered to touch or get close to their bodies. In order to assume this situation, we performed the test at the following positions. Please refer to "APPENDIX 1" for more details.

(1) Front:

The test was performed in touch with Front surface of the EUT to the flat section of SAM Twin Phantom.

(2) Back :

The test was performed in touch with Back surface of the EUT to the flat section of SAM Twin Phantom.

(3) Top :

The test was performed in touch with Top surface of the EUT to the flat section of SAM Twin Phantom.

(4) Left Side :

The test was performed in touch with Left Side surface of the EUT to the flat section of SAM Twin Phantom.

(5) Right Side :

The test was performed in touch with Right Side surface of the EUT to the flat section of SAM Twin Phantom.

(6) Top (Separation Change) :

The measurement opened 5mm, 10mm and 15mm distance between Top surface of the EUT and SAM Twin Phantom.

(7) Front (Bluetooth) :

The test was performed in touch with Front surface of the EUT to the flat section of SAM Twin Phantom.

(8) Back (Bluetooth) :

The test was performed in touch with Back of the EUT to the flat section of SAM Twin Phantom.

(9) Top (Bluetooth) :

The test was performed in touch with Top surface of the EUT to the flat section of SAM Twin Phantom.

(10) Right Side (Bluetooth) :

The test was performed in touch with Right Side surface of the EUT to the flat section of SAM Twin Phantom.

SECTION 6 : Test surrounding

6.1 Measurement uncertainty

The uncertainty budget has been determined for the DASY4 measurement system according to the SPEAG documents[6][7] and is given in the following Table.

Error Description	Uncertainty value $\pm$ %	Probability distribution	divisor	(ci) lg	Standard Uncertainty (1g)	vi or v _{eff}
Measurement System						
Probe calibration	± 6.8	Normal	1	1	± 6.8	∞
Axial isotropy of the probe	± 4.7	Rectangular	$\sqrt{3}$	$(1-c_p)^{1/2}$	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	$\sqrt{3}$	$(c_p)^{1/2}$	± 3.9	∞
Boundary effects	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2	∞
Probe linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Readout electronics	± 1.0	Normal	1	1	± 1.0	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.5	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5	∞
RF ambient conditions	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Mech. constraints of robot	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.5	∞
Probe positioning	± 5.7	Normal	1	1	± 5.7	∞
Extrap. and integration	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Test Sample Related						
Device positioning	± 2.9	Normal	1	1	± 2.9	18
Device holder uncertainty	± 3.6	Rectangular	1	1	± 3.6	11
Power drift	± 10.0	Normal	$\sqrt{3}$	1	± 5.8	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	± 5.0	Rectangular	1	0.64	± 3.2	∞
Liquid permittivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 1.7	∞
Liquid permittivity (meas.)	± 5.0	Normal	1	0.6	± 3.0	∞
Combined Standard Uncertainty					± 14.298	
Expanded Uncertainty (k=2)					± 28.6	

The test result shows that the power drift exceeded $\pm 5\%$. Therefore, the uncertainty of power drift expanded to $\pm 10\%$. However, the extended uncertainty (k= 2) of a test is less than 30%.

SECTION 7 : Confirmation before testing

7.1 Conducted power

Date : October 14, 2005

[IEEE802.11b: 11Mbps]						
Ch	Freq. [MHz]	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Converted [mW]
Low	2412	7.84	2.47	10.70	21.01	126.18
Mid	2437	7.37	2.49	10.70	20.56	113.76
High	2462	6.63	2.50	10.70	19.83	96.16

11Mbps is the worst data rate in SAR(11b) result.

Date : October 14, 21, 2005

[Bluetooth]						
Ch	Freq. [MHz]	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Converted [mW]
Low	2402	-12.40	2.46	10.70	0.76	1.19
Mid	2441	-12.76	2.49	10.70	0.43	1.10
High	2480	-13.13	2.50	10.70	0.07	1.02

Sample Calculation:

Result = Reading + Cable Loss (supplied by customer)+ Attenuator

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

7.2 Power drift measurement

The power drift was not within $\pm 5\%$ on SAR re-testing with full-charged battery.

Therefore the conducted power was measured in elapsed time.


The average power was measured under the condition of Max. Power of IEEE802.11b.

As a result, power changed by -9.4% . The result is shown in the following.

So the uncertainty of power drift was expanded to $\pm 10\%$.

2412 MHz(IEEE 802.11b) Average power

Time [Minutes]	Result [dBm]	Converted [mW]	Diviation [%]
1	18.08	64.27	-
5	17.90	61.66	-4.1
10	17.75	59.57	-7.3
15	17.68	58.61	-8.8
20	17.66	58.34	-9.2
25	17.65	58.21	-9.4
30	17.65	58.21	-9.4

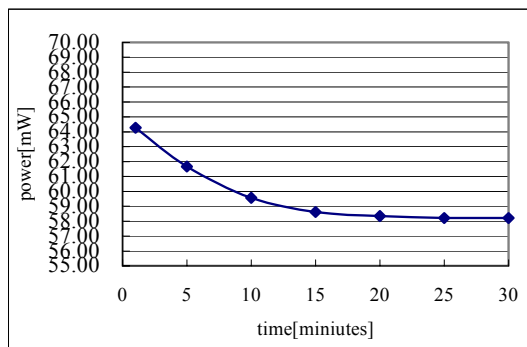

SECTION 8 : Measurement results

8.1 SAR measurement results

The measurement data is put on appendix 3.

8.1.1 Body 2450MHz SAR of Wireless LAN

Liquid Depth (cm)	: 15.2	Model	: XIT-100-BW
Parameters	: $\epsilon_r = 53.2$, $\sigma = 2.03$	Serial No.	: 1
Ambient temperature (deg.c.)	: 25.0	Modulation	: DSSS
Relative Humidity (%)	: 50	Crest factor	: 1
Date	: October 26, 2005	Measured By	: Hisayoshi Sato

BODY SAR MEASUREMENT RESULTS										
Frequency			Modulation (Data rate[bps])	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Mode	Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
11b	Step1. Position search									
	Mid	2437	CCK(11Mbps)	Flat	Fixed	Front	0	24.8	24.8	0.085
	Mid	2437	CCK(11Mbps)	Flat	Fixed	Back	0	24.8	24.8	0.030
	Mid	2437	CCK(11Mbps)	Flat	Fixed	Top	0	24.8	24.7	0.447
	Mid	2437	CCK(11Mbps)	Flat	Fixed	Left Side	0	24.7	24.7	0.015
	Step2. Frequency Change									
	Low	2412	CCK(11Mbps)	Flat	Fixed	Top	0	24.6	24.6	0.609
	High	2462	CCK(11Mbps)	Flat	Fixed	Top	0	24.6	24.6	0.315
	Step 3. Separation Change									
	Low	2412	CCK(11Mbs)	Flat	Fixed	Top	5	24.7	24.7	0.215
	Low	2412	CCK(11Mbs)	Flat	Fixed	Top	10	24.6	24.6	0.078
	Low	2412	CCK(11Mbs)	Flat	Fixed	Top	15	24.6	24.7	0.038
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population								Head SAR: 1.6 W/kg (averaged over 1 gram)		

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

8.1.2 Body 2450MHz SAR of Wireless LAN (Tested for Right side*1)

Liquid Depth (cm) : 15.1 Model : XIT-100-BW
Parameters : $\epsilon_r = 50.2$, $\sigma = 2.00$ Serial No. : 1
Ambient temperature (deg.c.) : 24.5 Modulation : DSSS
Relative Humidity (%) : 41 Crest factor : 1
Date : November 16, 2005 Measured By : Hisayoshi Sato

BODY SAR MEASUREMENT RESULTS										
Frequency			Modulation (Data rate[bps])	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Mode	Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
11b	Mid*2	2437	CCK(11Mbps)	Flat	Fixed	Right Side	0	23.4	23.4	0.021
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population								Head SAR: 1.6 W/kg (averaged over 1 gram)		

*1 The outlet of the control cable on the EUT was changed.

*2 The Right side was not the worst position so that neither Low ch nor High ch was measured.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

8.1.3 Body 2450MHz SAR of Bluetooth


Liquid Depth (cm)	: 15.2	Model	: XIT-100-BW
Parameters	: $\epsilon_r=51.6$, $\sigma=1.97$	Serial No.	: 2
Ambient temperature (deg.c.)	: 25.0	Modulation	: FHSS
Relative Humidity (%)	: 49	Crest factor	: 1
Date	: October 28,2005	Measured By	: Hisayoshi Sato

BODY SAR MEASUREMENT RESULTS										
Frequency			Modulation (Data rate[bps])	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Mode	Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
Bluetooth	Step4. Position search									
	Mid	2441	GFSK	Flat	Fixed	Front	0	24.5	24.5	0.0011
	Mid	2441	GFSK	Flat	Fixed	Back	0	24.6	24.6	0.000663
	Mid	2441	GFSK	Flat	Fixed	Top	0	24.5	24.5	0.0000934
	Mid	2441	GFSK	Flat	Fixed	Right side	0	24.5	24.5	0.000296
	Step5. Frequency Change									
	Low	2402	GFSK	Flat	Fixed	Front	0	24.6	24.6	0.000241
	High	2480	GFSK	Flat	Fixed	Front	0	24.6	24.5	0.00039
	Step6. BT Hopping ON									
-	-	Hopping ON	Flat	Fixed	Front	0	24.6	24.6	0.000331	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population								Head SAR: 1.6 W/kg (averaged over 1 gram)		

APPENDIX 1 : Photographs of test setup

Photograph of EUT

Model : XIT-100-BW
Serial No. : 1

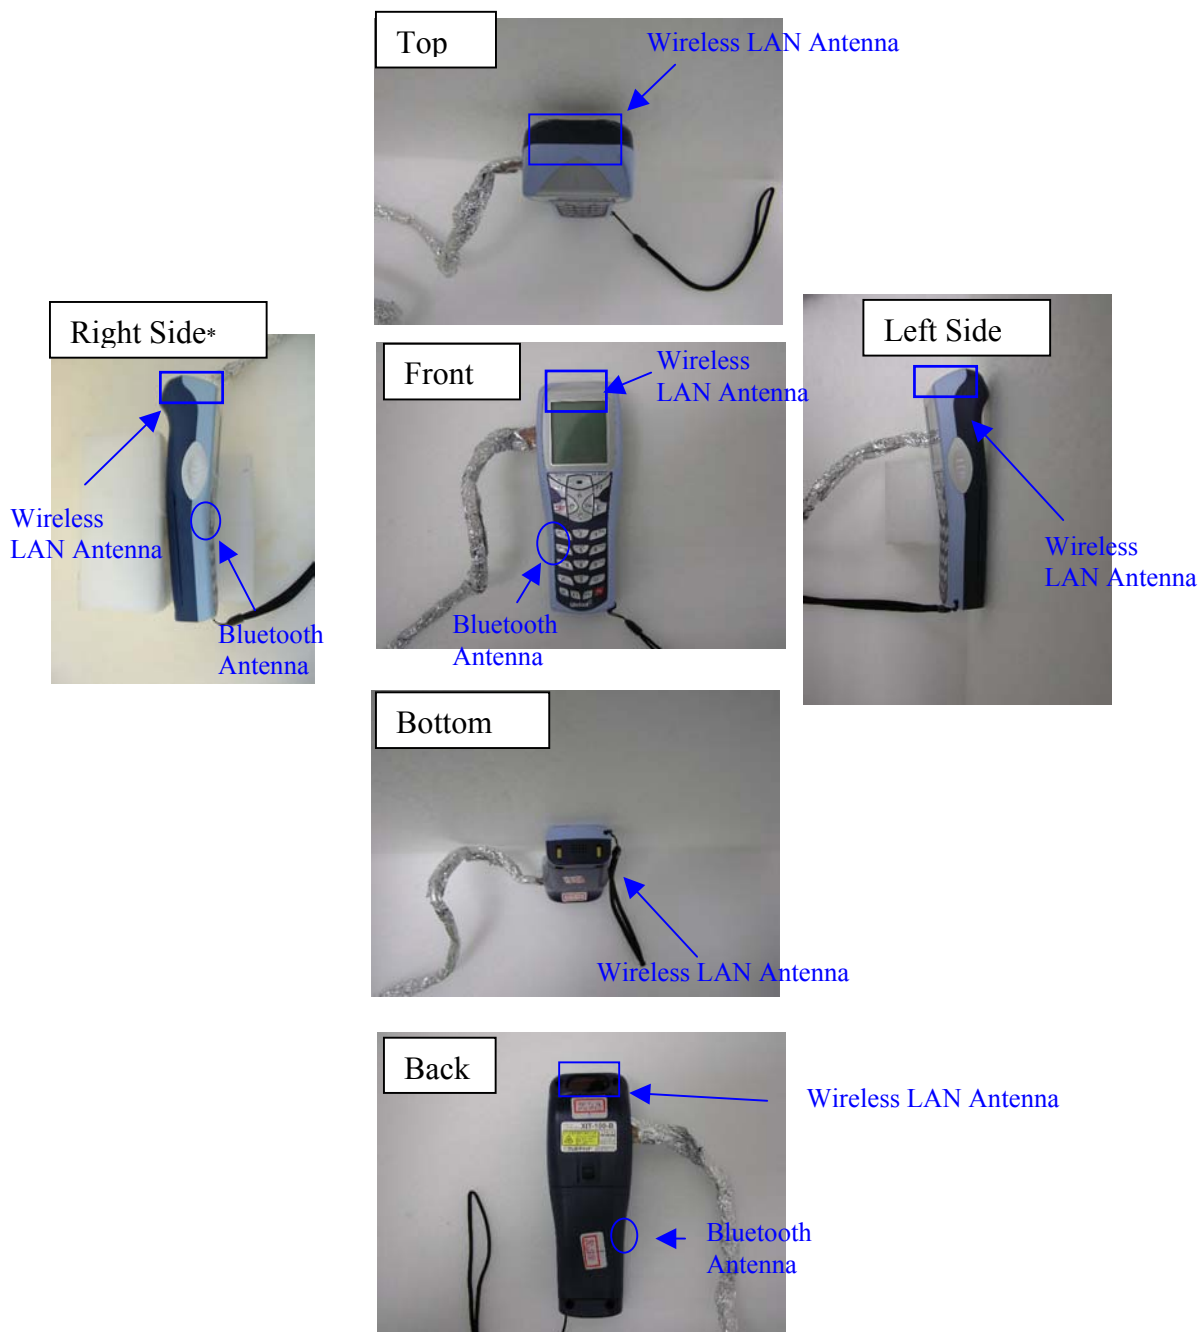

* The outlet of the control cable on the EUT was changed.

Model : XIT-100-BW
Serial No. : 2




(1) Front



(2) Back



(3) Top

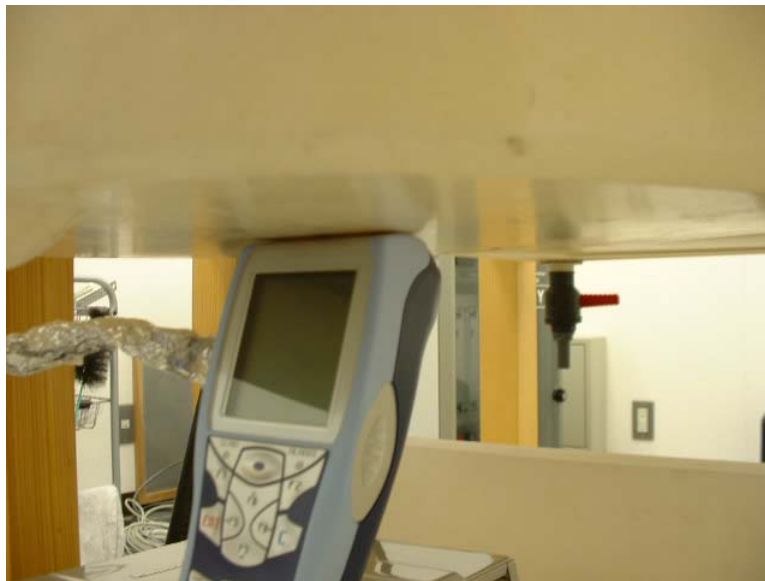

(4) Left Side




(5) Right Side




(6-a) Top (Separated 5mm)



(6-b) Top (Separated 10mm)

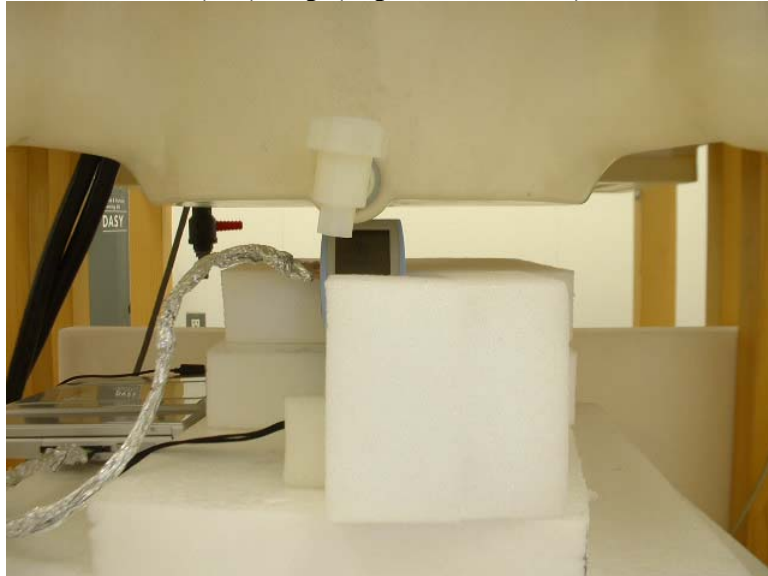

(6-c) Top (Separated 15mm)

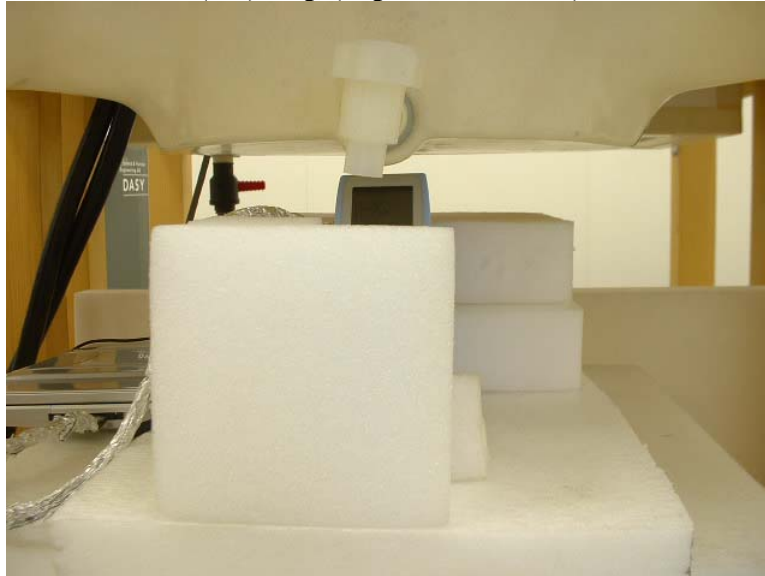

(7) Front (Bluetooth)




(8) Back (Bluetooth)



(9) Top (Bluetooth)



(10) Right side (Bluetooth)

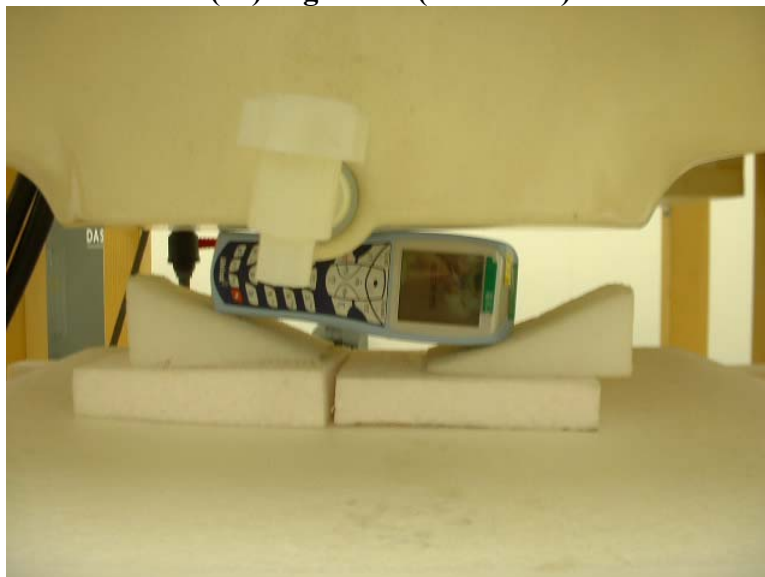

APPENDIX 2 : Test instruments

Equipment & calibration information**1. Equipment used**

Date : October 14, 21 2005

Name of Equipment	Manufacture	Model number	Serial number	Calibration	
				Last Cal	due date
Spectrum Analyzer	Agilent	E4448A	MY44020357	2005/06/03	2006/06/02
Microwave Cable	Storm	421-011 (90-1394-079)	01-12-002	2005/01/05	2006/01/04
Microwave Cable	Storm	421-011 (90-011-080)	03-04-002	2005/04/29	2006/04/28
Attenuator	Agilent	8493C	71389	2005/06/03	2006/06/02
Attenuator	Orient Microwqwave	BX10-0476-00	-	2005/03/16	2006/03/15

UL Apex Co., Ltd.**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

Date : October 26, 28 2005

Name of Equipment	Manufacture	Model number	Serial number	Calibration	
				Last Cal	due date
Power Meter	Agilent	E4417A	GB41290639	2004/11/09	2005/11/08
Power Sensor	Agilent	E9300B	US40010300	2004/11/15	2005/11/14
Power Sensor	Agilent	E9327A	US40440545	2004/11/23	2005/11/22
S-Parameter Network Analyzer	Agilent	8753ES	US39174808	2003/10/23	2006/10/22
Network Analyzer	Agilent/HP	E8358A	US41080381	2004/08/06	2007/08/05
Signal Generator	Rohde&Schwarz	SML40	100023	2005/01/05	2006/01/04
RF Amplifier	TSJ	TCBP0206	1005	2005/02/24	2006/02/23
Dosimetric E-Field Probe	Schmid&Partner Engineering AG	EX3DV3	3507	2005/04/12	2006/04/11
Data Acquisition Electronics	Schmid&Partner Engineering AG	DAE3	516	2005/03/10	2006/03/09
Robot,SAM Phantom	Schmid&Partner Engineering AG	DASY4	I021834	N/A	N/A
Attenuator	Agilent	US40010300	08498-60012	2004/12/16	2005/12/15
2450MHz SystemValidation Dipole	Schmid&Partner Engineering AG	D2450V2	765	2004/11/15	2006/11/14
Dual Directional Coupler	N/A	Narda	03702	N/A	N/A
Head 2450MHz	N/A	N/A	N/A	N/A	N/A
Body 2450MHz	N/A	N/A	N/A	N/A	N/A
Ambient Noise <0.012W/kg	SAR room	-	-	2005/10/26 2005/10/28	-

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

Date : November 16 2005

Name of Equipment	Manufacture	Model number	Serial number	Calibration	
				Last Cal	due date
Power Meter	Agilent	E4417A	GB41290639	2005/11/09	2006/11/08
Power Sensor	Agilent	E9300B	US40010300	2005/11/15	2006/11/14
Power Sensor	Agilent	E9327A	US40440545	2005/11/23	2006/11/22
S-Parameter Network Analyzer	Agilent	8753ES	US39174808	2003/10/23	2006/10/22
Network Analyzer	Agilent/HP	E8358A	US41080381	2004/08/06	2007/08/05
Signal Generator	Rohde&Schwarz	SML40	100023	2005/01/05	2006/01/04
RF Amplifier	TSJ	TCBP0206	1005	2005/02/24	2006/02/23
Dosimetric E-Field Probe	Schmid&Partner Engineering AG	EX3DV3	3507	2005/04/12	2006/04/11
Data Acquisition Electronics	Schmid&Partner Engineering AG	DAE3	516	2005/03/10	2006/03/09
Robot,SAM Phantom	Schmid&Partner Engineering AG	DASY4	I021834	N/A	N/A
Attenuator	Agilent	US40010300	08498-60012	2004/12/16	2005/12/15
2450MHz SystemValidation Dipole	Schmid&Partner Engineering AG	D2450V2	765	2004/11/15	2006/11/14
Dual Directional Coupler	N/A	Narda	03702	N/A	N/A
Head 2450MHz	N/A	N/A	N/A	N/A	N/A
Body 2450MHz	N/A	N/A	N/A	N/A	N/A
Ambient Noise <0.012W/kg	SAR room	-	-	2005/11/16	-

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

2. Dosimetry assessment setup

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m), which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetry probe ET3DV6, SN: 1684 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in [2] with accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure described in [3] and found to be better than ± 0.25 dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEEE P1528 and CENELEC EN50361.

3. Configuration and peripherals

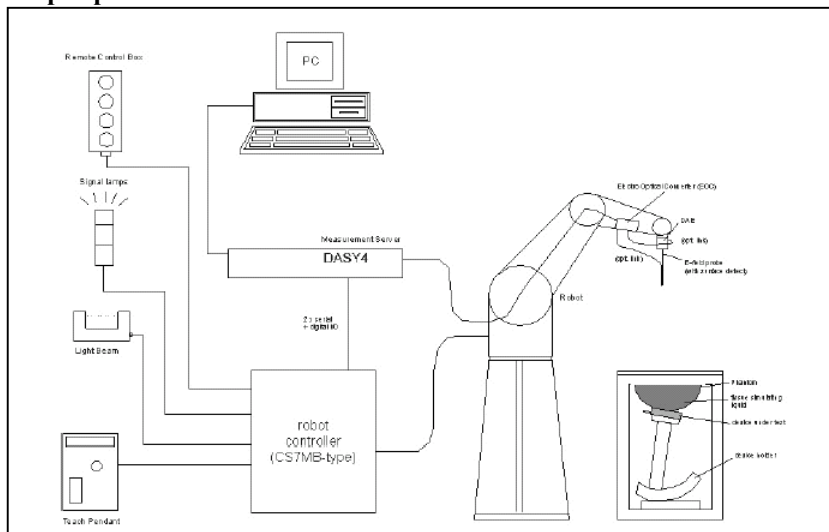

The DASY4 system for performing compliance tests consist of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software.
An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE), which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection.
The EOC is connected to the measurement server.
5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
7. A computer operating Windows 2000.
8. DASY4 software.
9. Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
10. The SAM twin phantom enabling testing left-hand and right-hand usage.
11. The device holder for handheld mobile phones.
12. Tissue simulating liquid mixed according to the given recipes.
13. Validation dipole kits allowing to validate the proper functioning of the system.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

4. System components

4.2.1 EX3DV3 Probe Specification

Construction:

Symmetrical design with triangular core
Built-in shielding against static charges
PEEK enclosure material (resistant to organic solvents, e.g., glycol ether)

Calibration:

Basic Broad Band calibration in air : 10-3000 MHz
Conversion Factor (Head and Body): 900 MHz, 1.8 GHz ,2.45GHz,5.2GHz, 5.8GHz

Frequency:

10 MHz to > 6GHz; Linearity: +/-0.2 dB(30 MHz to 3 GHz)

Directivity:

+/-0.3 dB in HSL (rotation around probe axis)
+/-0.5 dB in tissue material (rotation normal probe axis)

Dynamic Range:

10uW/g to > 100 mW/g;Linearity: +/-0.2 dB(noise: typically < 1uW/g)

Dimensions:

Overall length: 330 mm (Tip: 20 mm)
Tip diameter: 2.5mm (Body: 12 mm)
Typical distance from probe tip to dipole centers: 1 mm

Application:

Highprecision dosimetric measurement in any exposure scenario
(e.g., very strong gradient fields).Only probe which enables compliance
testing for frequencies up to 6GHz with precision of better 30%.



EX3DV3 E-field Probe

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SAM Twin Phantom

Construction:

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC EN 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup by manually teaching three points with the robot.

Shell Thickness:


2 +/-0.2 mm

Filling Volume:

Approx. 25 liters

Dimensions:

(H x L x W): 810 x 1000 x 500 mm

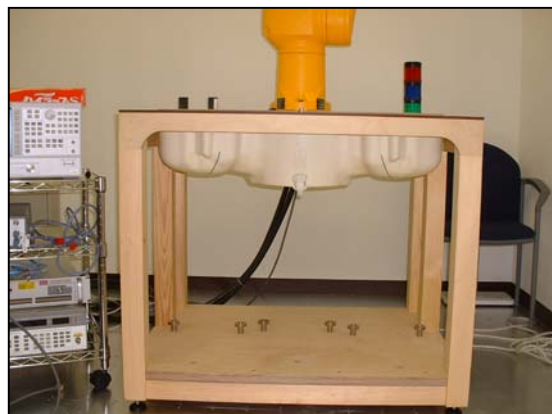

SAM Twin Phantom

Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0, the Mounting Device enables the rotation of the mounted transmitter

in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

* Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations.

To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



Device Holder

Device holder couldn't be used at this SAR measurement.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

5. Test system specifications

Robot RX60L

Number of Axes	:	6
Payload	:	1.6 kg
Reach	:	800mm
Repeatability	:	+/-0.025mm
Control Unit	:	CS7M
Programming Language	:	V+
Manufacture	:	Stäubli Unimation Corp. Robot Model: RX60

DASY4 Measurement server

Features	:	166MHz low power Pentium MMX 32MB chipdisk and 64MB RAM Serial link to DAE (with watchdog supervision) 16 Bit A/D converter for surface detection system Two serial links to robot (one for real-time communication which is supervised by watchdog) Ethernet link to PC (with watchdog supervision) Emergency stop relay for robot safety chainTwo expansion slots for future applications
Manufacture	:	Schimid & Partner Engineering AG

Data Acquisition Electronic (DAE)

Features	:	Signal amplifier, multiplexer, A/D converter and control logic Serial optical link for communication with DASY4 embedded system (fully remote controlled) 2 step probe touch detector for mechanical surface detection and emergency robot stop (not in -R version)
Measurement Range	:	1 μ V to > 200 mV (16 bit resolution and two range settings: 4mV, 400mV)
Input Offset voltage	:	< 1 μ V (with auto zero)
Input Resistance	:	200 M Ω
Battery Power	:	> 10 h of operation (with two 9 V battery)
Dimension	:	60 x 60 x 68 mm
Manufacture	:	Schimid & Partner Engineering AG

Software

Item	:	Dosimetric Assesment System DASY4
Type No.	:	SD 000 401A, SD 000 402A
Software version No.	:	4.5
Manufacture / Origin	:	Schimid & Partner Engineering AG

E-Field Probe

Model	:	EX3DV3
Serial No.	:	3507
Construction	:	Symmetrical design with triangular core
Frequency	:	10 MHz to 6 GHz
Linearity	:	+/-0.2 dB (30 MHz to 3 GHz)
Manufacture	:	Schimid & Partner Engineering AG

Phantom

Type	:	SAM Twin Phantom V4.0
Shell Material	:	Fiberglass
Thickness	:	2.0 +/-0.2 mm
Volume	:	Approx. 25 liters
Manufacture	:	Schimid & Partner Engineering AG

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

6. Simulated tissues composition of 2450MHz

Ingredient	MIXTURE(%)	
	Head 2450MHz	Muscle 2450MHz
Water	45.0	69.83
DGMBE	55.0	30.2

Note:DGMBE(Diethylenglycol-monobuthyl ether)

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

7. Validation measurement

Simulated tissue liquid parameter

7-a Simulated tissue liquid parameter confirmation

The dielectric parameters were checked prior to assessment using the HP85070D dielectric probe kit.
The dielectric parameters measurement are reported in each correspondent section.

7-b Head 2450 MHz

Type of liquid : Head 2450 MHz
Ambient temperature (deg.c.) : 25.0(October 26, October 28), 24.5(November 16)
Relative Humidity (%) : 50(October 26), 49(October 28), 41(November 16)
Liquid depth (cm) : 15.1(October 26, October 28, November 16)

DIELECTRIC PARAMETERS MEASUREMENT RESULTS								
Date	Frequency	Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
		Before	After					
26-Oct	2450	24.0	24.0	Relative Permittivity ϵ_r	39.2	37.7	-3.8	+/-10
				Coductivity σ [mho/m]	1.80	1.85	2.8	+/-5
28-Oct	2450	24.0	24.0	Relative Permittivity ϵ_r	39.2	37.3	-4.8	+/-10
				Coductivity σ [mho/m]	1.80	1.85	2.8	+/-5
16-Nov	2450	23.6	23.6	Relative Permittivity ϵ_r	39.2	37.6	-4.1	+/-10
				Coductivity σ [mho/m]	1.80	1.88	4.4	+/-5

7-c Muscle 2450 MHz

Type of liquid : Muscle 2450 MHz
Ambient temperature (deg.c.) : 25.0(October 26, October 28), 24.5(November 16)
Relative Humidity (%) : 50(October 26), 49(October 28), 41(November 16)
Liquid depth (cm) : 15.2(October 26, October 28), 15.1(November 16)

DIELECTRIC PARAMETERS MEASUREMENT RESULTS								
Date	Frequency	Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
		Before	After					
26-Oct	2450	24.6	24.6	Relative Permittivity ϵ_r	52.7	53.2	0.9	+/-5
				Coductivity σ [mho/m]	1.95	2.03	4.1	+/-5
28-Oct	2450	24.5	24.5	Relative Permittivity ϵ_r	52.7	51.6	-2.1	+/-5
				Coductivity σ [mho/m]	1.95	1.97	1.0	+/-5
16-Nov	2450	23.5	23.5	Relative Permittivity ϵ_r	52.7	50.2	-4.7	+/-5
				Coductivity σ [mho/m]	1.95	2.00	2.6	+/-5

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

8. System validation data


Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of +/-10%. The validation results are in the table below. Please refer to APPENDIX3.

System validation of 2450MHz

Type of liquid : HEAD 2450MHz
Ambient temperature (deg.c.) : 25.0(October 26, October 28), 24.5(November 16)
Relative Humidity (%) : 50(October 26), 49(October 28), 41(November 16)
Liquid depth (cm) : 15.1(October 26, October 28, November 16)
Dipole : D2450V2 SN:765
Power : 250mW

SYSTEM PERFORMANCE CHECK										
Date	Liquid (HEAD 2450MHz)						System dipole validation target & measured			
	Liquid Temp [deg.c.]		Relative Permittivity ϵ_r		Conductivity σ [mho/m]		SAR 1g [W/kg]		Deviation [%]	Limit [%]
	Before	After	Target	Measured	Target	Measured	Target	Measured		
26-Oct	24.0	24.0	39.2	37.7	1.80	1.85	13.1	13.1	0.0	+/-10
28-Oct	24.2	24.2	39.2	37.3	1.80	1.85	13.1	13.6	3.8	+/-10
16-Nov	23.6	23.6	39.2	37.6	1.80	1.88	13.1	13.9	6.1	+/-10

Note: Please refer to Attachment for the result representation in plot format

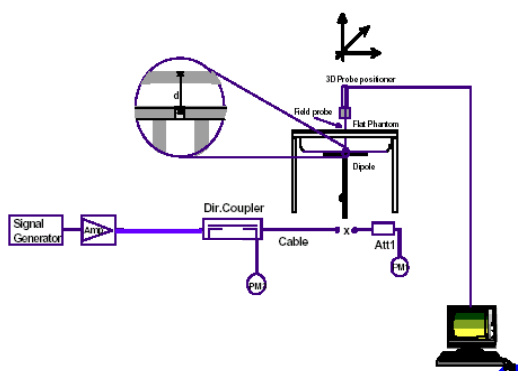

2450MHz System
performance check setup

Test system for the system performance check setup diagram

9. Validation uncertainty

The uncertainty budget has been determined for the DASY4 measurement system according to the SPEAG documents[6][7] and is given in the following Table.

Error Description	Uncertainty value $\pm$ %	Probability distribution	divisor	(ci) 1g	Standard Uncertainty (1g)	vi or veff
Measurement System						
Probe calibration	± 6.8	Normal	1	1	± 6.8	∞
Axial isotropy of the probe	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7	∞
Spherical isotropy of the probe	± 0	Rectangular	$\sqrt{3}$	1	0	∞
Boundary effects	2.0	Rectangular	$\sqrt{3}$	1	± 1.2	∞
Probe linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Readout electronics	± 0.3	Normal	1	1	± 0.3	∞
Response time	0	Rectangular	$\sqrt{3}$	1	0	∞
Integration time	0	Rectangular	$\sqrt{3}$	1	0	∞
RF ambient conditions	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Mech. constraints of robot	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.5	∞
Probe positioning	± 5.7	Rectangular	1	1	± 5.7	∞
Extrap. and integration	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Dipole						
Dipole Axis to Liquid Distance	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2	∞
Input power and SAR drift meas.	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	± 5.0	Rectangular	1	0.64	± 3.2	∞
Liquid permittivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 1.7	∞
Liquid permittivity (meas.)	± 5.0	Rectangular	1	0.6	± 3.0	∞
Combined Standard Uncertainty					± 11.959	
Expanded Uncertainty (k=2)					± 23.9	

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

10. Validation measurement data

10-a System Validation on October 26, 2005

System Validation / Dipole 2450 MHz / Forward Conducted Power : 250mW

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (101x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 20.3 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 88.0 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 26.5 W/kg


SAR(1 g) = 13.1 mW/g; SAR(10 g) = 6.01 mW/g

Maximum value of SAR (measured) = 18.8 mW/g

Test Date = 10/26/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.0 degree.C. , After 24.0 degree.C.

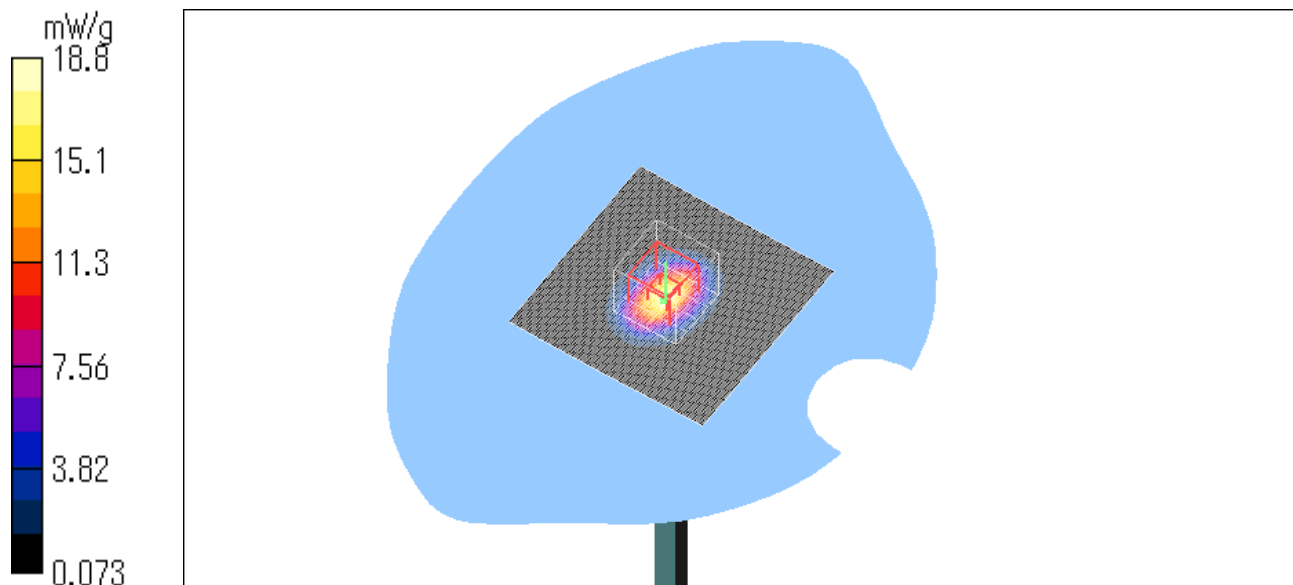

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

10-b System Validation on October 28, 2005

System Validation / Dipole 2450 MHz / Forward Conducted Power : 250mW


Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 37.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY4 (High Precision Assessment)
DASY4 Configuration:
Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE3 Sn509; Calibrated: 2005/05/26
Phantom: SAM 1196
Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (101x101x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 20.9 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 90.8 V/m; Power Drift = -0.021 dB
Peak SAR (extrapolated) = 27.6 W/kg

SAR(1 g) = 13.6 mW/g; SAR(10 g) = 6.32 mW/g
Maximum value of SAR (measured) = 19.4 mW/g

Test Date = 10/28/05
Ambient Temperature = 25.0 degree.C.
Liquid Temperature = Before 24.2 degree.C. , After 24.2 degree.C.

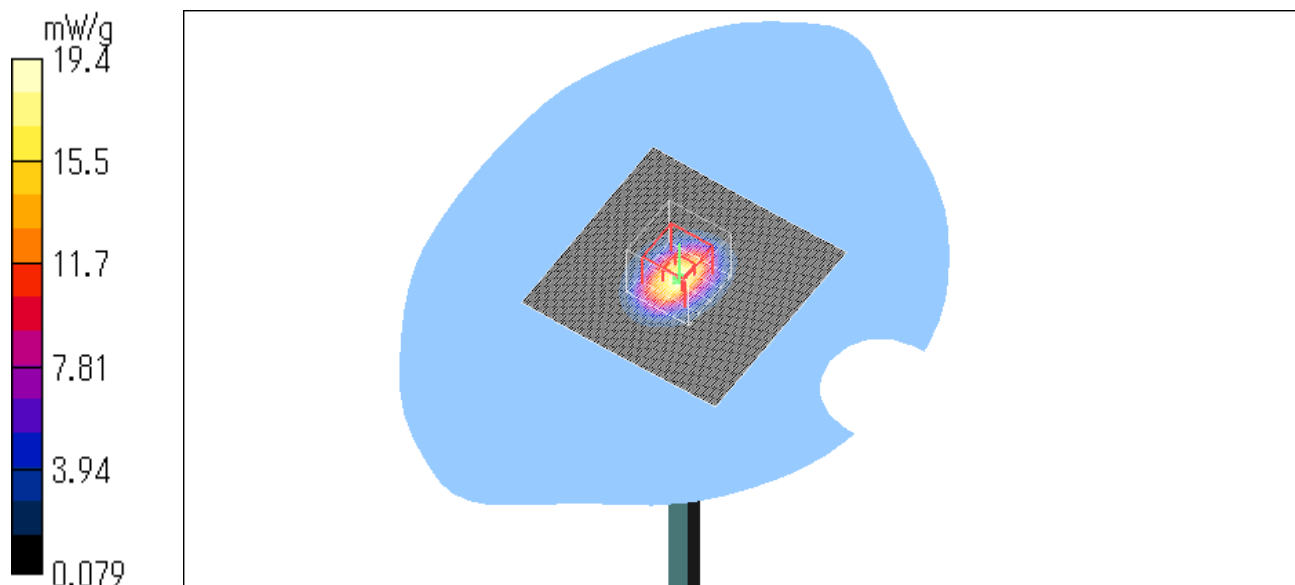

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

10-c System Validation on November 16, 2005

System Validation / Dipole 2450 MHz / Forward Conducted Power : 250mW


Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY4 (High Precision Assessment)
DASY4 Configuration:
Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE3 Sn509; Calibrated: 2005/05/26
Phantom: SAM 1196
Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (101x101x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 21.3 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 90.4 V/m; Power Drift = -0.052 dB
Peak SAR (extrapolated) = 28.2 W/kg

SAR(1 g) = 13.9 mW/g; SAR(10 g) = 6.44 mW/g
Maximum value of SAR (measured) = 20.0 mW/g

Test Date = 11/16/05
Ambient Temperature = 24.5 degree.C.
Liquid Temperature = Before 23.6 degree C. , After 23.6 degree C.

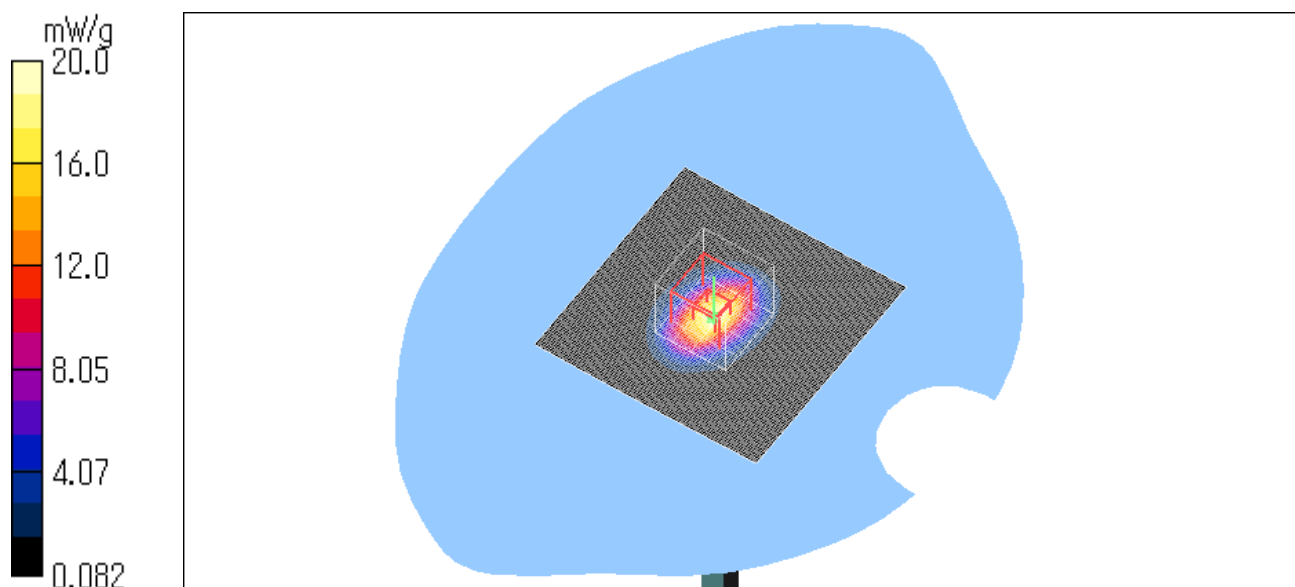

Test report No. : 26AE0244-HO-7a
Page : 49 of 88
Issued date : November 17, 2005
Revised date : December 7, 2005
FCC ID : Q98XIT100BW

11. System Validation Dipole (D2450V2,S/N: 765)

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **MTT**

Certificate No: **D2450V2-765_Nov04**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 765**

Calibration procedure(s) **QA CAL-05.v6
Calibration procedure for dipole validation kits**

Calibration date: **November 15, 2004**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E442	GB37480704	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Power sensor HP 8481A	US37292783	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Reference 20 dB Attenuator	SN: 5086 (20g)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference Probe ES3DV2	SN 3025	29-Oct-04 (SPEAG, No. ES3-3025_Oct04)	Oct-05
DAE4	SN 601	6-Nov-03 (SPEAG, No. DAE4-601_Jul04)	Jul-05
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-03)	In house check: Oct-05
RF generator R&S SML-03	100698	27-Mar-02 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Nov-03)	In house check: Nov 04

Calibrated by:	Name Mike Meili	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Technical Manager	

Issued: November 17, 2004

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D2450V2-765_Nov04

Page 1 of 9

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Area Scan resolution	dx, dy = 15 mm	
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(23.0 $\pm$ 0.2) °C	38.3 $\pm$ 6 %	1.86 mho/m $\pm$ 6 %
Head TSL temperature during test	(23.0 $\pm$ 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	condition	
SAR measured	250 mW input power	13.5 mW / g
SAR normalized	normalized to 1W	54.0 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	52.7 mW / g $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.15 mW / g
SAR normalized	normalized to 1W	24.6 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	24.0 mW / g $\pm$ 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.96 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	51.7 ± 6 %	1.96 mho/m ± 6 %
Body TSL temperature during test	(22.0 ± 0.2) °C	-----	-----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	condition	
SAR measured	250 mW input power	13.3 mW / g
SAR normalized	normalized to 1W	53.2 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	52.5 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.12 mW / g
SAR normalized	normalized to 1W	24.5 mW / g
SAR for nominal Body TSL parameters ¹	normalized to 1W	24.1 mW / g ± 16.5 % (k=2)

² Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$52.7 \Omega + j4.6 \Omega$
Return Loss	-25.8 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$48.9 \Omega + j6.3 \Omega$
Return Loss	-23.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.175 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for IDC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	August 10, 2004

DASY4 Validation Report for Head TSL

Date/Time: 11/17/04 10:57:18

Test Laboratory: SPEAG, Zürich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN765

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL 2450 MHz;

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(4.4, 4.4, 4.4); Calibrated: 29.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 22.07.2004
- Phantom: Flat Phantom quarter size -SN:1001; Type: QD000P50AA; Serial: SN:1001
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 15.6 mW/g


Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 79.7 V/m; Power Drift = 0.2 dB


Peak SAR (extrapolated) = 29 W/kg

SAR(1 g) = 13.5 mW/g; SAR(10 g) = 6.15 mW/g

Maximum value of SAR (measured) = 15.3 mW/g

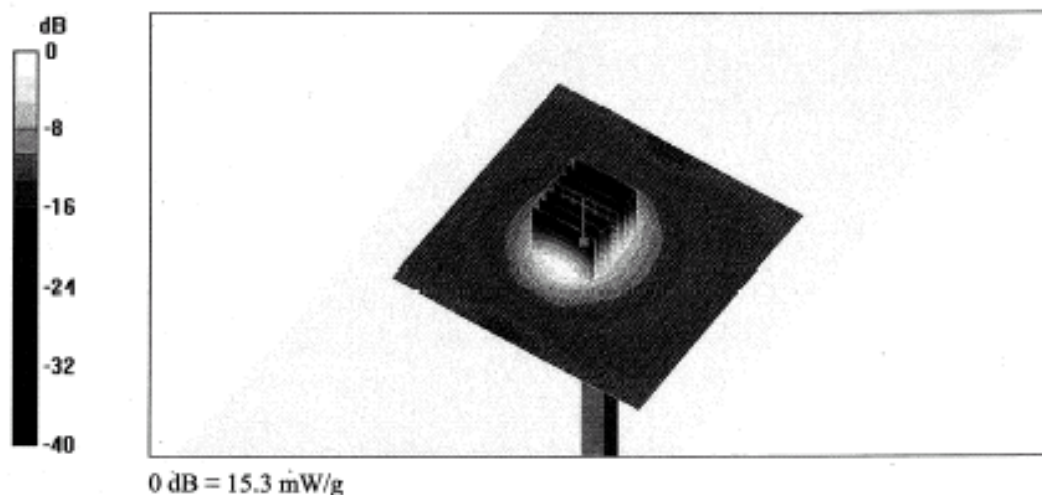

Impedance Measurement Plot for Head TSL

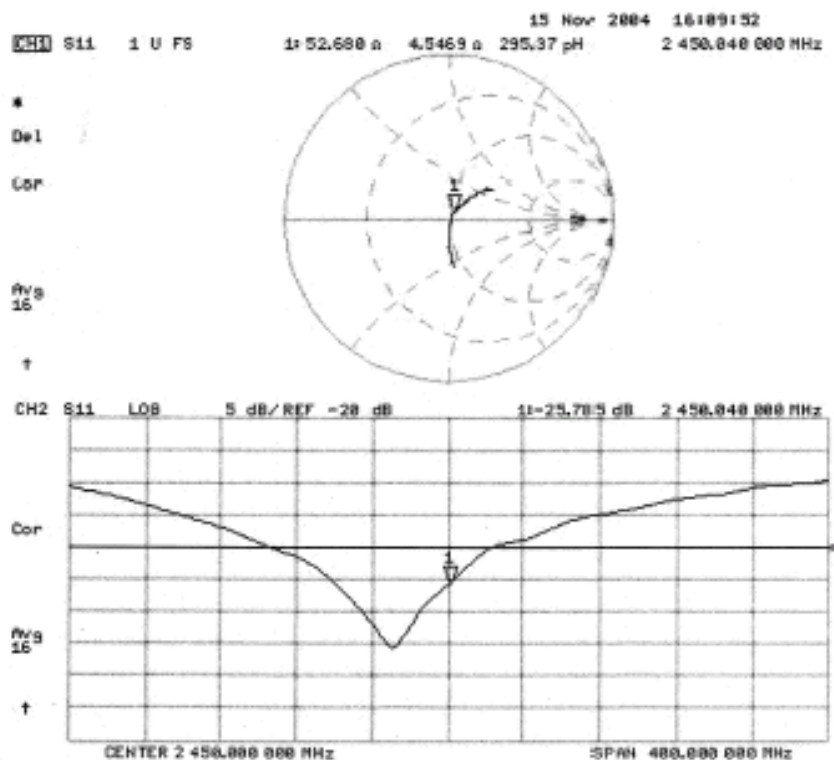

DASY4 Validation Report for Body TSL

Date/Time: 11/17/04 10:57:37

Test Laboratory: SPEAG, Zürich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN765

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL 2450 MHz;

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3025; ConvR(4.13, 4.13, 4.13); Calibrated: 29.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 22.07.2004
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 15.3 mW/g


Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.6 V/m; Power Drift = 0.1 dB


Peak SAR (extrapolated) = 27.4 W/kg

SAR(1 g) = 13.3 mW/g; SAR(10 g) = 6.12 mW/g

Maximum value of SAR (measured) = 15.2 mW/g

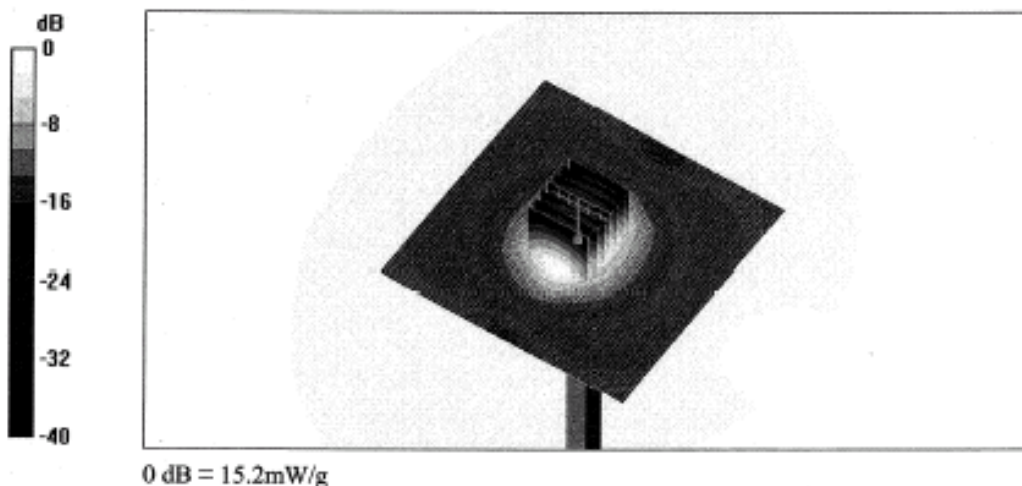

Impedance Measurement Plot for Body TSL

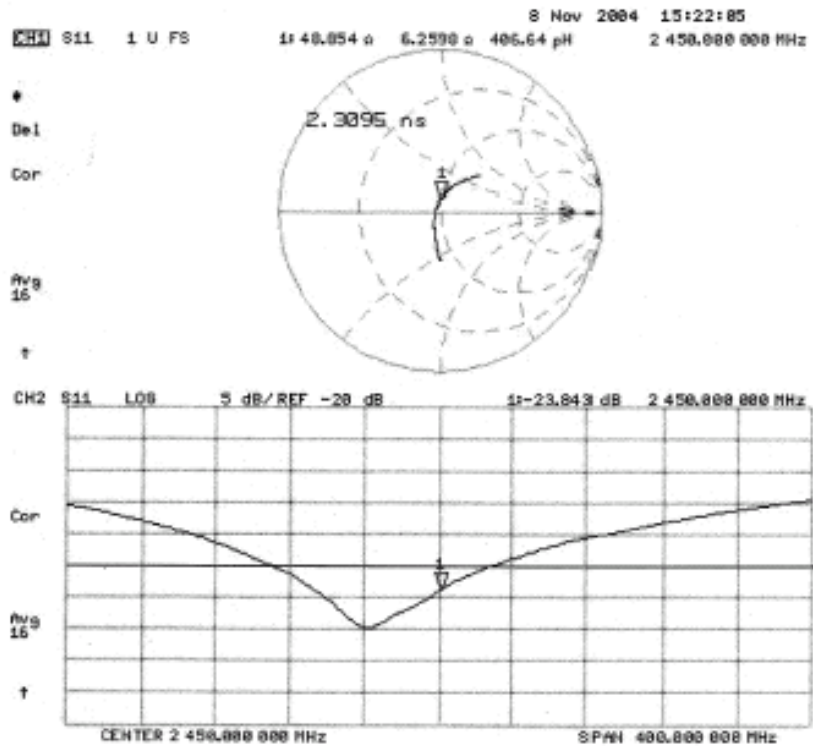

Test report No. : 26AE0244-HO-7a
 Page : 58 of 88
 Issued date : November 17, 2005
 Revised date : December 7, 2005
 FCC ID : Q98XIT100BW

12. Dosimetric E-Field Probe Calibration (EX3DV3,S/N: 3507)

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **UL Apex (INT)**

Certificate No: **EX3-3507_Apr05**

CALIBRATION CERTIFICATE																																																			
Object	EX3DV3 - SN:3507																																																		
Calibration procedure(s)	GA CAL-01.v5 and GA CAL-14.v2 Calibration procedure for dosimetric E-Field probes																																																		
Calibration date:	April 12, 2005																																																		
Condition of the calibrated item	In Tolerance																																																		
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$. Calibration Equipment used (M&TE critical for calibration) <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter E4419B</td> <td>GB41293874</td> <td>5-May-04 (METAS, No. 251-00388)</td> <td>May-05</td> </tr> <tr> <td>Power sensor E4412A</td> <td>MY41495277</td> <td>5-May-04 (METAS, No. 251-00388)</td> <td>May-05</td> </tr> <tr> <td>Reference 3 dB Attenuator</td> <td>SN: S5054 (3c)</td> <td>10-Aug-04 (METAS, No. 251-00403)</td> <td>Aug-05</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: S5086 (20b)</td> <td>3-May-04 (METAS, No. 251-00388)</td> <td>May-05</td> </tr> <tr> <td>Reference 30 dB Attenuator</td> <td>SN: S5129 (30b)</td> <td>10-Aug-04 (METAS, No. 251-00404)</td> <td>Aug-05</td> </tr> <tr> <td>Reference Probe ES3DV2</td> <td>SN: 3013</td> <td>7-Jan-05 (SPEAG, No. ES3-3013_Jan05)</td> <td>Jan-06</td> </tr> <tr> <td>DAE4</td> <td>SN: 617</td> <td>19-Jan-05 (SPEAG, No. DAE4-617_Jan05)</td> <td>Jan-06</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Power sensor HP 8481A</td> <td>MY41092180</td> <td>18-Sep-02 (SPEAG, in house check Oct-03)</td> <td>In house check: Oct 05</td> </tr> <tr> <td>RF generator HP 8648C</td> <td>US3642U01700</td> <td>4-Aug-99 (SPEAG, in house check Dec-03)</td> <td>In house check: Dec-05</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585</td> <td>18-Oct-01 (SPEAG, in house check Nov-04)</td> <td>In house check: Nov 05</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power meter E4419B	GB41293874	5-May-04 (METAS, No. 251-00388)	May-05	Power sensor E4412A	MY41495277	5-May-04 (METAS, No. 251-00388)	May-05	Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-04 (METAS, No. 251-00403)	Aug-05	Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-04 (METAS, No. 251-00388)	May-05	Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-04 (METAS, No. 251-00404)	Aug-05	Reference Probe ES3DV2	SN: 3013	7-Jan-05 (SPEAG, No. ES3-3013_Jan05)	Jan-06	DAE4	SN: 617	19-Jan-05 (SPEAG, No. DAE4-617_Jan05)	Jan-06	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05	RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05	Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov 05
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																
Power meter E4419B	GB41293874	5-May-04 (METAS, No. 251-00388)	May-05																																																
Power sensor E4412A	MY41495277	5-May-04 (METAS, No. 251-00388)	May-05																																																
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-04 (METAS, No. 251-00403)	Aug-05																																																
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-04 (METAS, No. 251-00388)	May-05																																																
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-04 (METAS, No. 251-00404)	Aug-05																																																
Reference Probe ES3DV2	SN: 3013	7-Jan-05 (SPEAG, No. ES3-3013_Jan05)	Jan-06																																																
DAE4	SN: 617	19-Jan-05 (SPEAG, No. DAE4-617_Jan05)	Jan-06																																																
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																																																
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05																																																
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05																																																
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov 05																																																
Calibrated by:	Name Miro Valtari	Function Laboratory Technician	Signature 																																																
Approved by:	Name Kolja Polovic	Function Technical Manager	Signature 																																																
Issued: April 12, 2005 This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																																																			

Certificate No: EX3-3507_Apr05

Page 1 of 10

UL Apex Co., Ltd.
Head Office EMC Lab.
 4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
 Telephone: +81 596 24 8116
 Facsimile: +81 596 24 8124

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

EX3DV3 SN:3507

April 12, 2005

Probe EX3DV3

SN:3507

Manufactured:	December 15, 2003
Last calibrated:	February 20, 2004
Recalibrated:	April 12, 2005

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

EX3DV3 SN:3507

April 12, 2005

DASY - Parameters of Probe: EX3DV3 SN:3507

Sensitivity in Free Space^A

Diode Compression^B

NormX	0.71 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	96 mV
NormY	0.74 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	96 mV
NormZ	0.73 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	96 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		2.0 mm	3.0 mm
SAR _{0a} [%]	Without Correction Algorithm	3.4	1.2
SAR _{0a} [%]	With Correction Algorithm	0.2	0.4

TSL 1810 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		2.0 mm	3.0 mm
SAR _{0a} [%]	Without Correction Algorithm	3.3	1.8
SAR _{0a} [%]	With Correction Algorithm	0.6	0.7

Sensor Offset

Probe Tip to Sensor Center 1.0 mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).


^B Numerical linearization parameter: uncertainty not required.

EX3DV3 SN:3507

April 12, 2005

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)



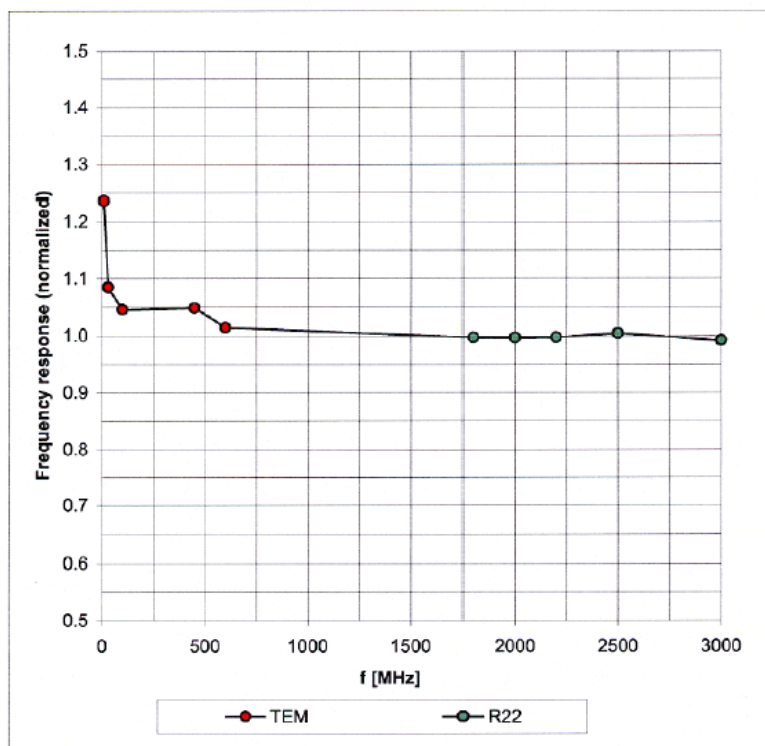


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

EX3DV3 SN:3507

April 12, 2005

Receiving Pattern (ϕ), $\theta = 0^\circ$

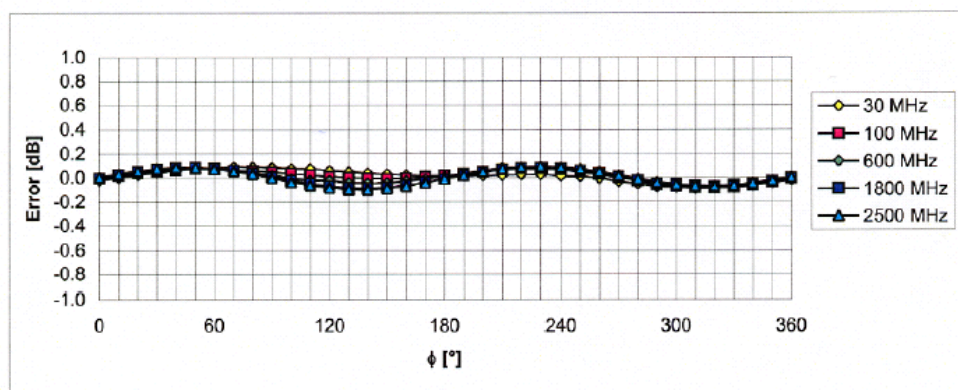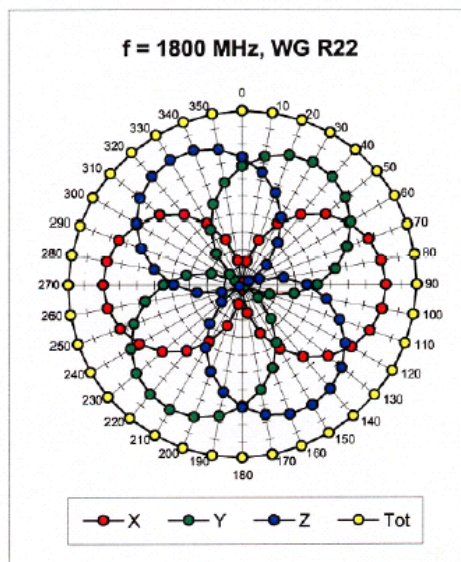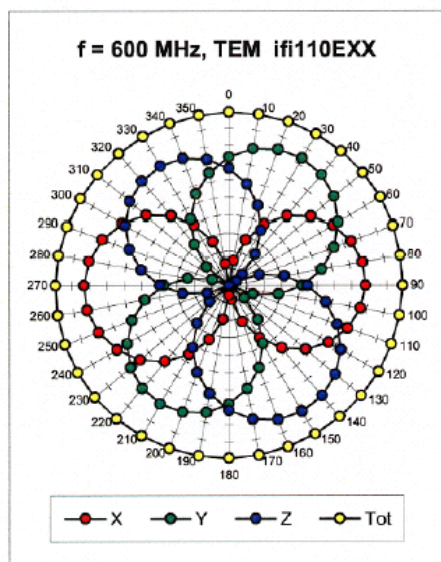


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

EX3DV3 SN:3507

April 12, 2005

Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800 \text{ MHz}$)


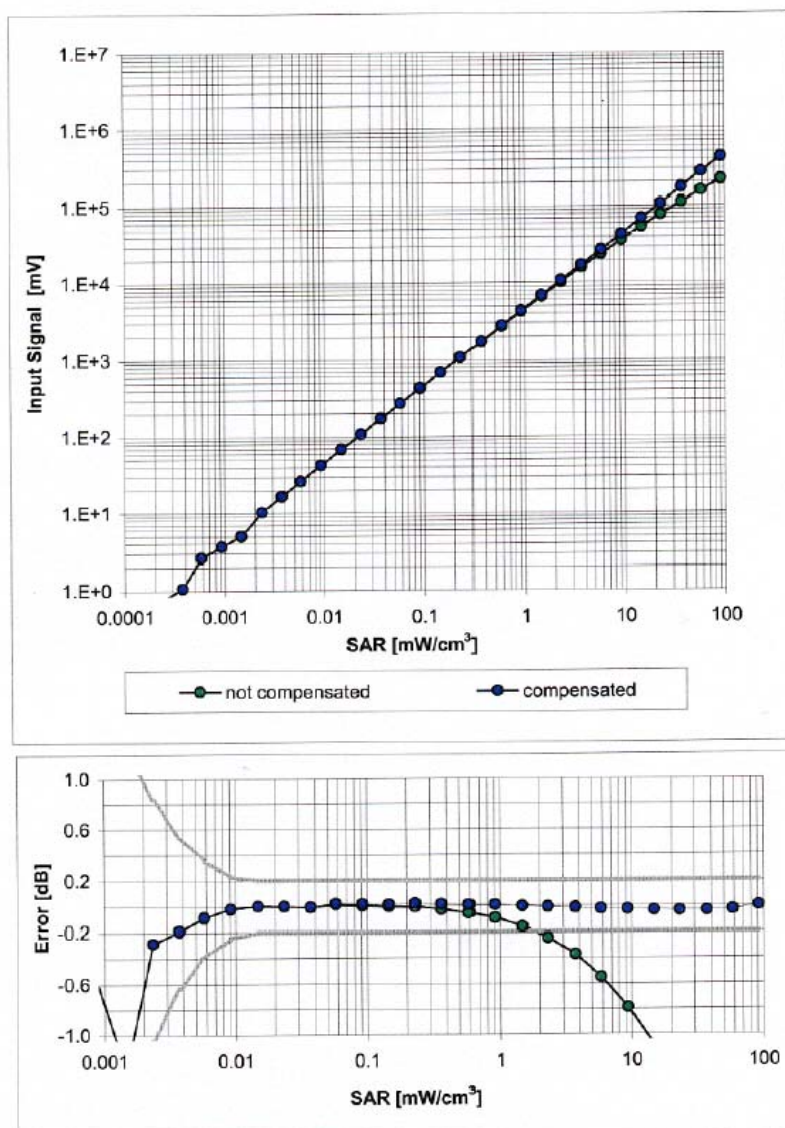


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

EX3DV3 SN:3507

April 12, 2005

Conversion Factor Assessment

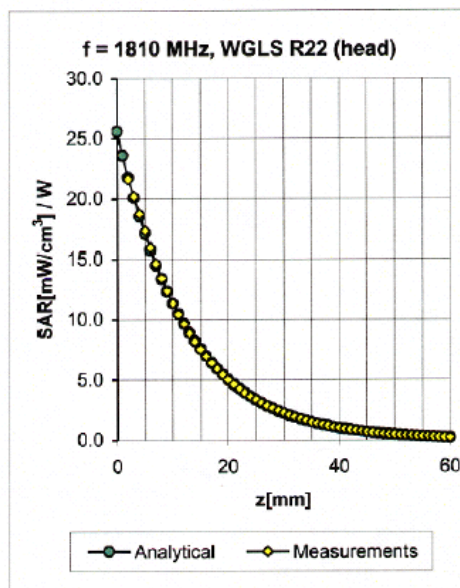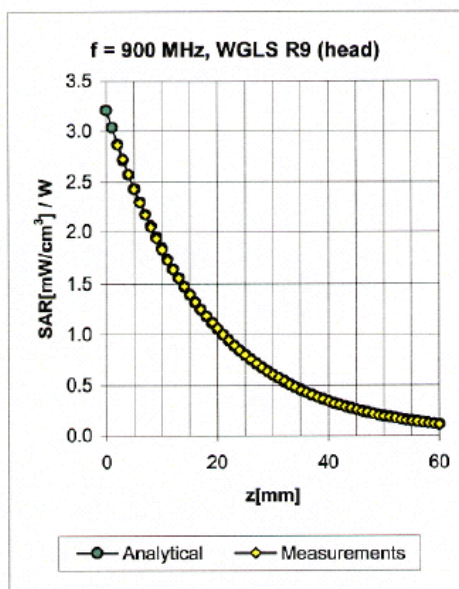

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.74	0.66	10.48 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.51	0.77	9.10 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.46	0.81	8.25 ± 11.8% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.79	0.62	10.42 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.30	1.78	8.70 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.33	1.59	7.72 ± 11.8% (k=2)


^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

EX3DV3 SN:3507

April 12, 2005

Deviation from Isotropy in HSL

Error (ϕ , θ), $f = 900$ MHz

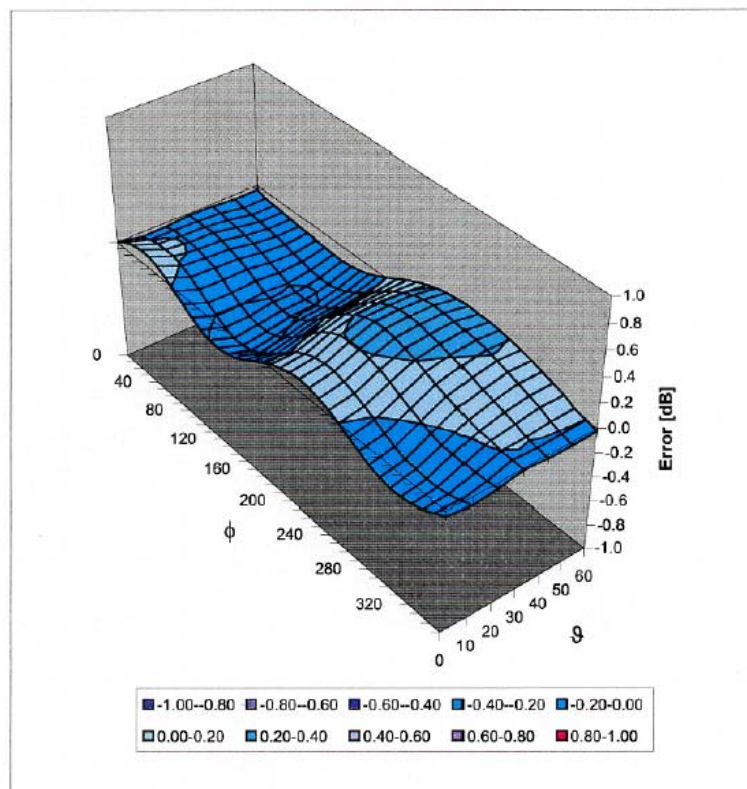


Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

EX3DV3 SN:3507

April 12, 2005

Appendix^D

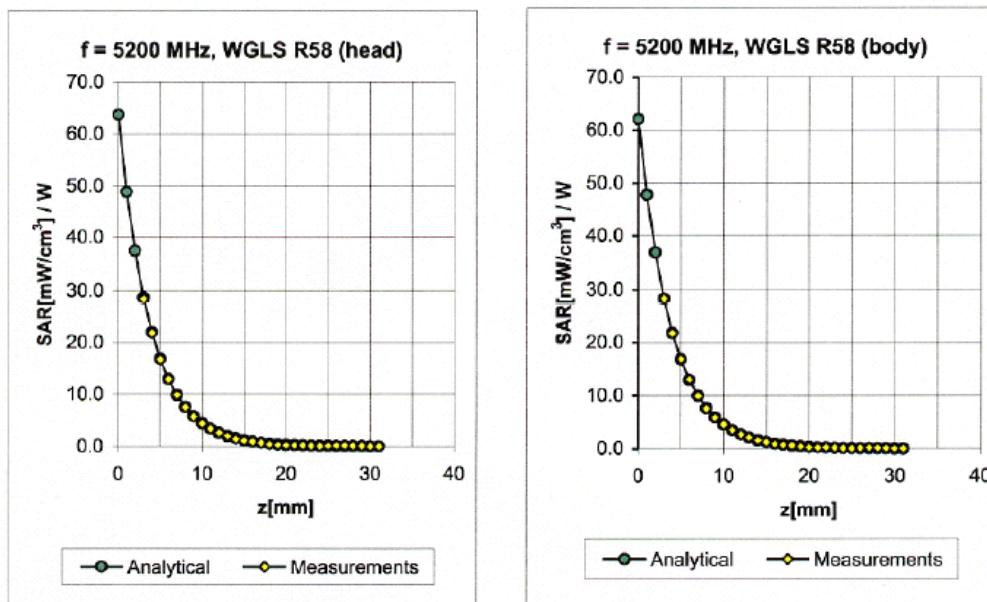

f [MHz] ^D	Validity [MHz]	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
5200	± 50	Head	36.0 ± 5%	4.76 ± 5%	0.41	1.80	5.37	± 13.6% (k=2)
5800	± 50	Head	35.3 ± 5%	5.27 ± 5%	0.45	1.80	4.67	± 13.6% (k=2)
5200	± 50	Body	49.0 ± 5%	5.30 ± 5%	0.45	1.90	4.86	± 13.6% (k=2)
5800	± 50	Body	48.2 ± 5%	6.00 ± 5%	0.45	1.90	4.32	± 13.6% (k=2)

^D Accreditation for ConvF assessment above 3000 MHz is currently applied for. Accreditation is expected in spring 2005.

13. References

- [1]ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [2] Katja Pokovic, Thomas Schmid, and Niels Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM '97, Dubrovnik, October 15-17, 1997, pp. 120-124.
- [3] Katja Pokovic, Thomas Schmid, and Niels Kuster, "E- field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [4] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [5] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992.
- [6]SPEAG uncertainty document for DASY 4 System from SPEAG (Shimid & Partner Engineering AG).
- [7]SPEAG uncertainty document for "the 5-6GHz Extension" from SPEAG (Shimid & Partner Engineering AG).

APPENDIX 3 : SAR Measurement data

1. Evaluation procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the E-field at a fixed location above the ear point or central position of flat phantom was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of head or body position was measured at a distance of each device from the inner surface of the shell. The area covered the entire dimension of the antenna of EUT and the horizontal grid spacing was 20 mm x 20 mm . Based on these data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Around this point found in the Step 2 (area scan) , a volume of 25.8mm x 25.8mm x 21mm was assessed by measuring 7 x 7 x 8 points. And for any secondary peaks found in the Step2 which are within 2dB of maximum peak and not with this Step3 (Zoom scan) is repeated. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

(1). The data at the surface were extrapolated, since the center of the dipoles is 1mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm [4]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

(2). The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x, y and z-directions) [4], [5]. The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.

(3). All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the E-field at the same location as in Step 1.

2. Measurement data of Wireless LAN

XIT-100-BW / Body / Front / 2437MHz / 11b / CCK(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 2.03 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (101x121x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.186 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.01 V/m ; Power Drift = -0.166 dB

Peak SAR (extrapolated) = 0.156 W/kg


SAR(1 g) = 0.085 mW/g ; SAR(10 g) = 0.042 mW/g

Maximum value of SAR (measured) = 0.118 mW/g

Test Date = 10/26/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.8 degree.C. , After 24.8 degree.C.

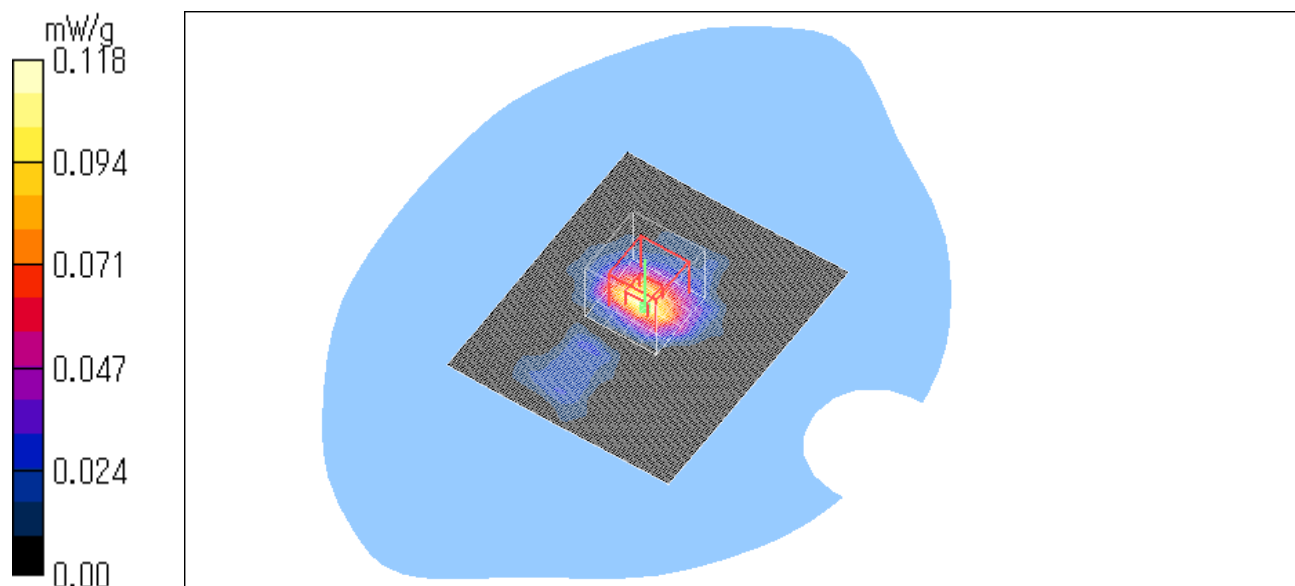

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

XIT-100-BW / Body / Back / 2437MHz / 11b / CCK(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 2.03 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (101x121x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.041 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.02 V/m ; Power Drift = -0.135 dB

Peak SAR (extrapolated) = 0.048 W/kg

SAR(1 g) = 0.030 mW/g ; SAR(10 g) = 0.017 mW/g

Maximum value of SAR (measured) = 0.039 mW/g

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.02 V/m ; Power Drift = -0.135 dB

Peak SAR (extrapolated) = 0.030 W/kg


SAR(1 g) = 0.015 mW/g ; SAR(10 g) = 0.00921 mW/g

Maximum value of SAR (measured) = 0.018 mW/g

Test Date = 10/26/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.8 degree.C. , After 24.8 degree.C.

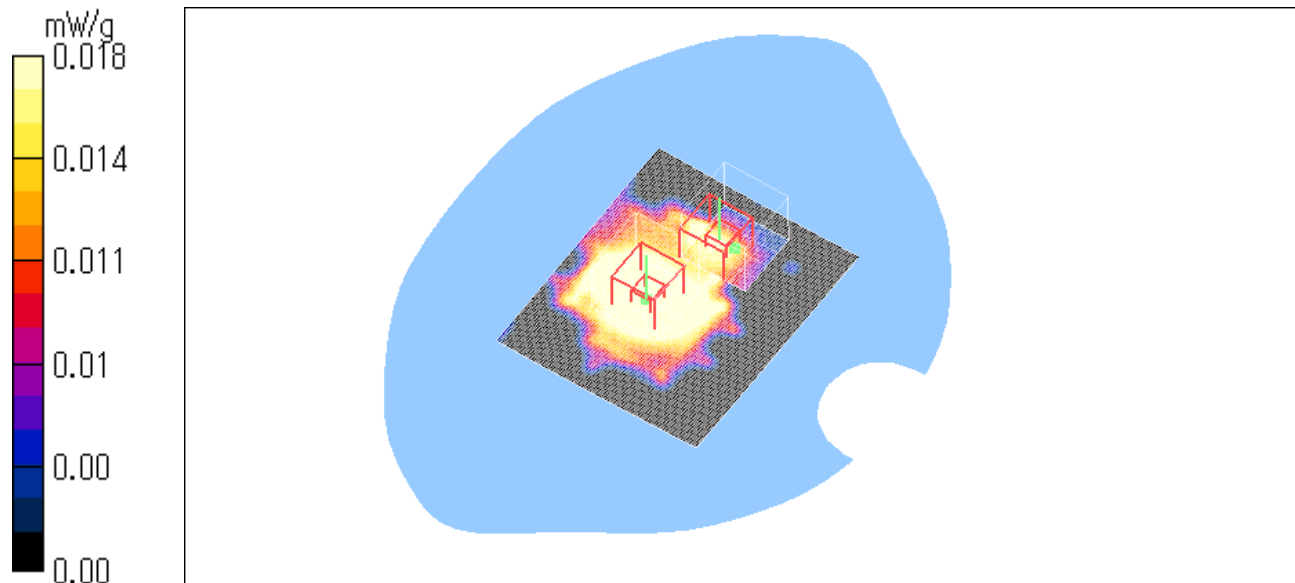

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

XIT-100-BW / Body / Top / 2437MHz / 11b / CCK(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (101x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.782 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.37 V/m; Power Drift = 0.212 dB

Peak SAR (extrapolated) = 0.871 W/kg


SAR(1 g) = 0.447 mW/g; SAR(10 g) = 0.190 mW/g

Maximum value of SAR (measured) = 0.664 mW/g

Test Date = 10/26/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.8 degree.C. , After 24.7 degree.C.

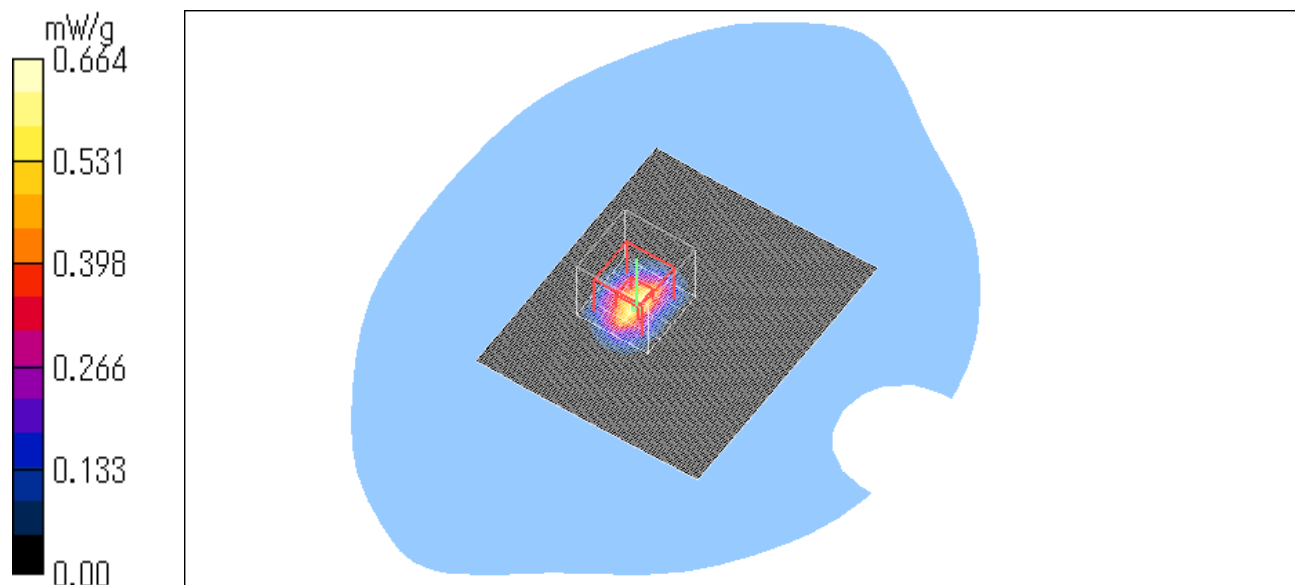

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

XIT-100-BW / Body / Left side / 2437MHz / 11b / CCK(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 2.03 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (101x121x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.027 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.54 V/m; Power Drift = -0.206 dB

Peak SAR (extrapolated) = 0.023 W/kg


SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.00858 mW/g

Maximum value of SAR (measured) = 0.019 mW/g

Test Date = 10/26/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.7 degree.C. , After 24.7 degree.C.

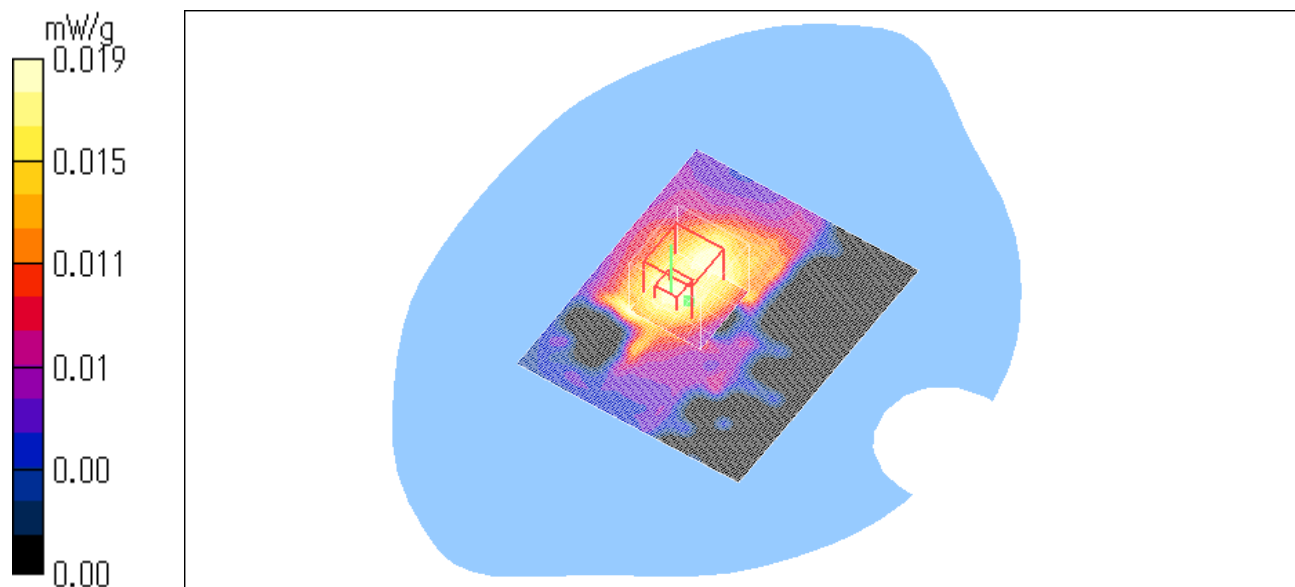

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

XIT-100-BW / Body / Top / 2412MHz / 11b / CCK(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (101x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.02 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.79 V/m; Power Drift = 0.080 dB

Peak SAR (extrapolated) = 1.15 W/kg


SAR(1 g) = 0.609 mW/g; SAR(10 g) = 0.259 mW/g

Maximum value of SAR (measured) = 0.910 mW/g

Test Date = 10/26/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.6 degree.C. , After 24.6 degree.C.

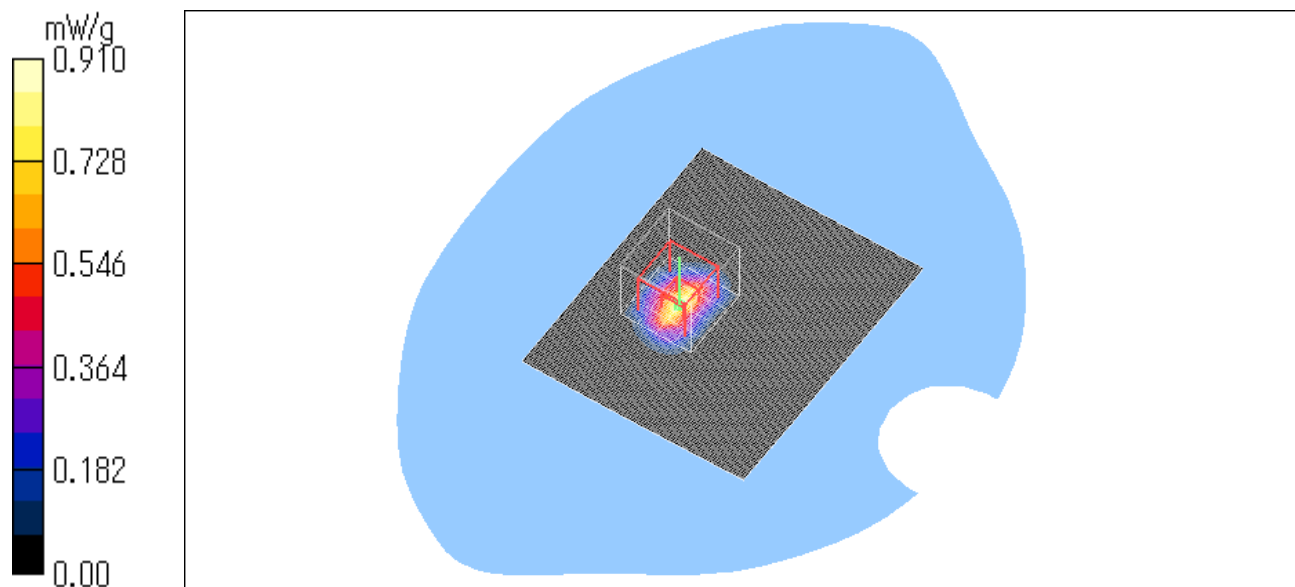

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

Z-axis scan at max SAR location

XIT-100-BW / Body / Top / 2412MHz / 11b / CCK(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 2.03 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:


Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

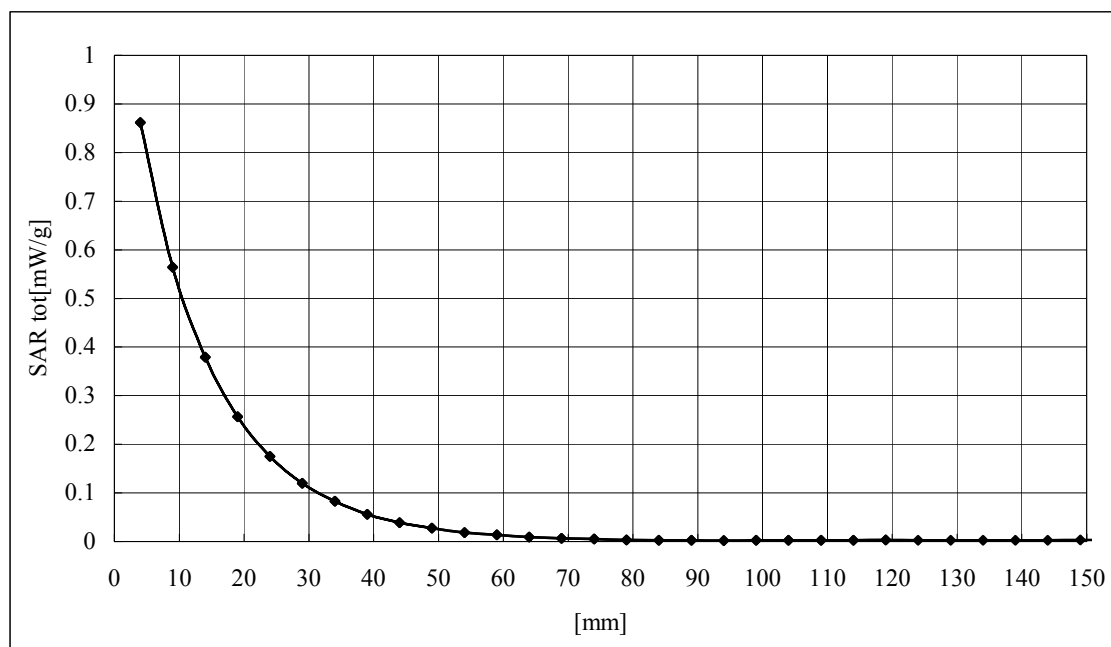

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

XIT-100-BW / Body / Top / 2462MHz / 11b / CCK(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (101x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.511 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.73 V/m; Power Drift = -0.210 dB

Peak SAR (extrapolated) = 0.604 W/kg


SAR(1 g) = 0.315 mW/g; SAR(10 g) = 0.136 mW/g

Maximum value of SAR (measured) = 0.468 mW/g

Test Date = 10/26/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.6 degree.C. , After 24.6 degree.C.

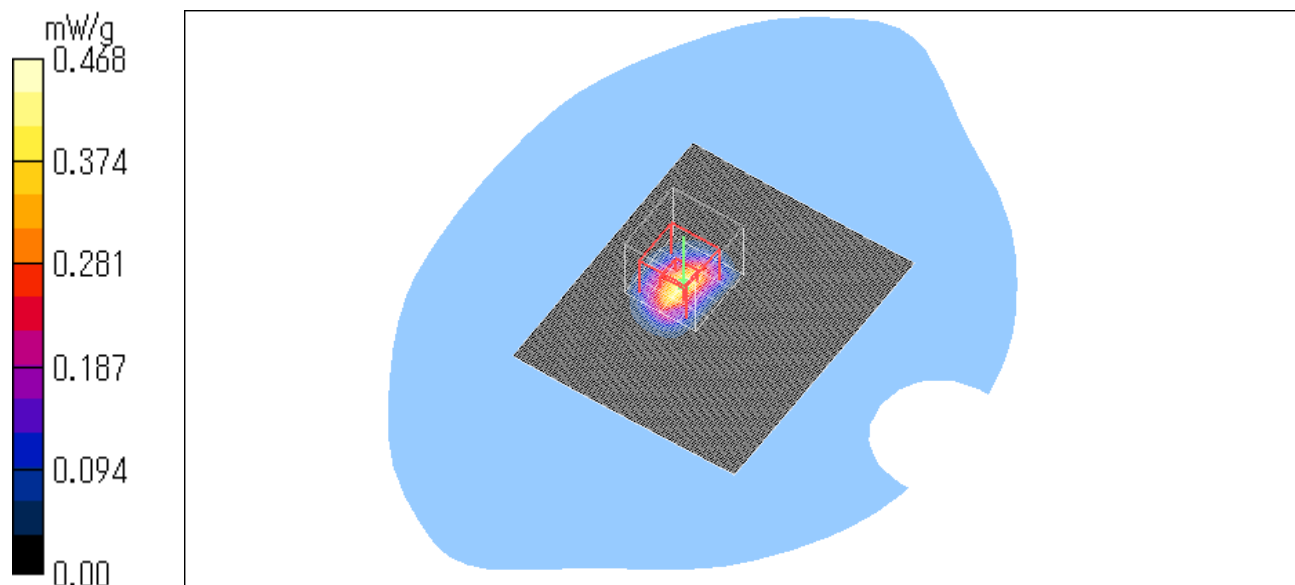

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

XIT-100-BW / Body / Top / 2412MHz / 11b / CCK(11Mbps) / Separated 5mm

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (101x121x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.310 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.01 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 0.373 W/kg


SAR(1 g) = 0.215 mW/g; SAR(10 g) = 0.102 mW/g

Maximum value of SAR (measured) = 0.308 mW/g

Test Date = 10/26/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.7 degree.C. , After 24.7 degree.C.

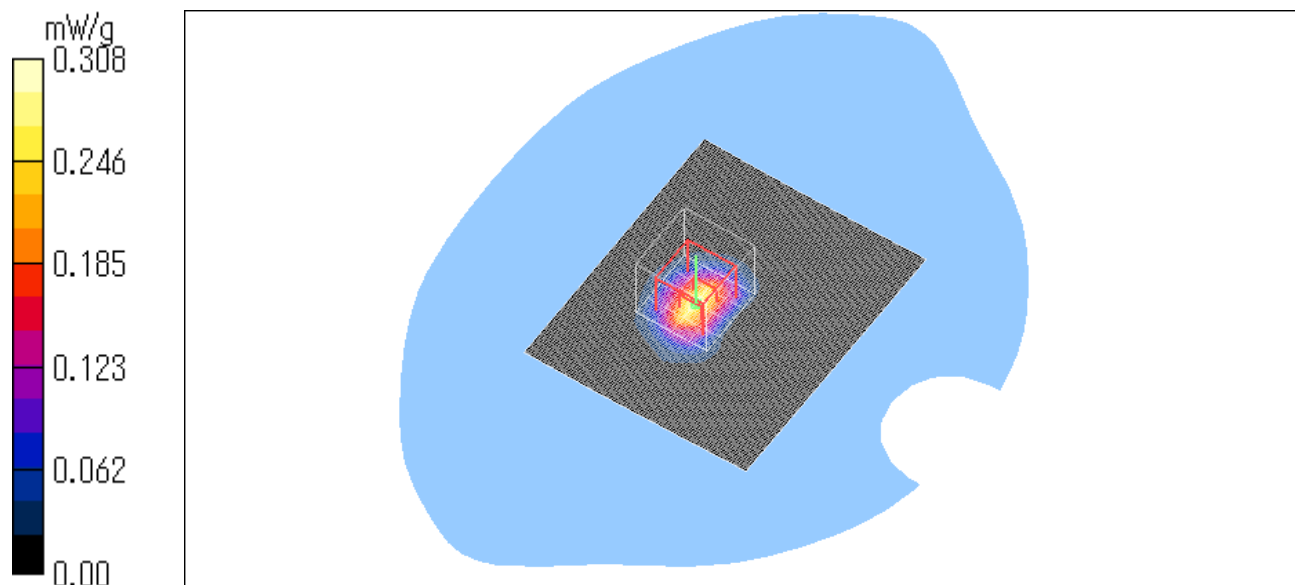

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

XIT-100-BW / Body / Top / 2412MHz / 11b / CCK(11Mbps) / Separated 10mm

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (101x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.108 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.63 V/m; Power Drift = -0.161 dB

Peak SAR (extrapolated) = 0.128 W/kg


SAR(1 g) = 0.078 mW/g; SAR(10 g) = 0.041 mW/g

Maximum value of SAR (measured) = 0.106 mW/g

Test Date = 10/26/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.6 degree.C. , After 24.6 degree.C.

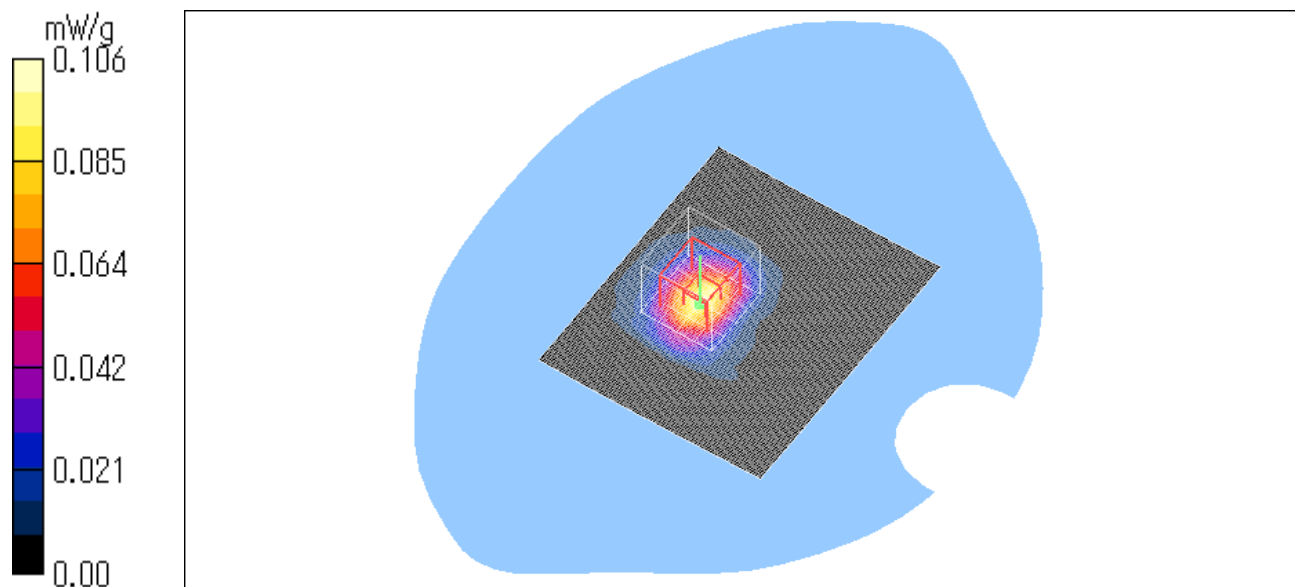

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

XIT-100-BW / Body / Top / 2412MHz / 11b / CCK(11Mbps) / Separated 15mm

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (101x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.050 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.99 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 0.060 W/kg


SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.021 mW/g

Maximum value of SAR (measured) = 0.051 mW/g

Test Date = 10/26/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.6 degree.C. , After 24.7 degree.C.

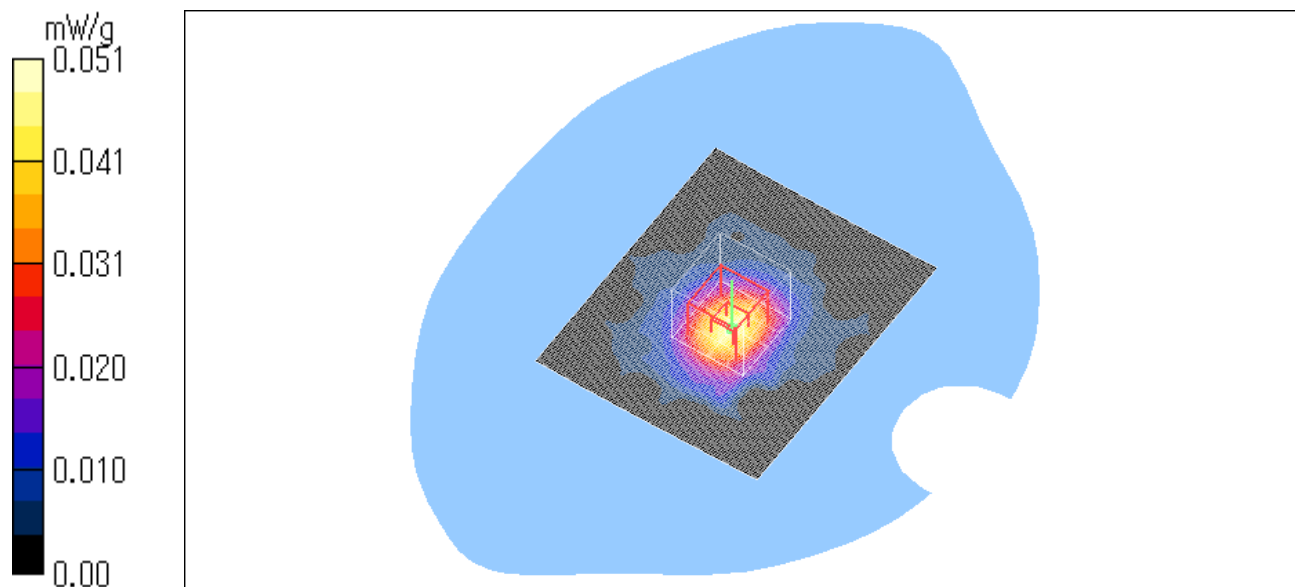

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

XIT-100-BW / Body / Right side / 2437MHz / 11b / CCK(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (101x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.028 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.91 V/m; Power Drift = -0.281 dB

Peak SAR (extrapolated) = 0.035 W/kg


SAR(1 g) = 0.021 mW/g; SAR(10 g) = 0.012 mW/g

Maximum value of SAR (measured) = 0.028 mW/g

Test Date = 11/16/05

Ambient Temperature = 24.5 degree.C.

Liquid Temperature = Before 23.4 degree C. , After 23.4 degree C.

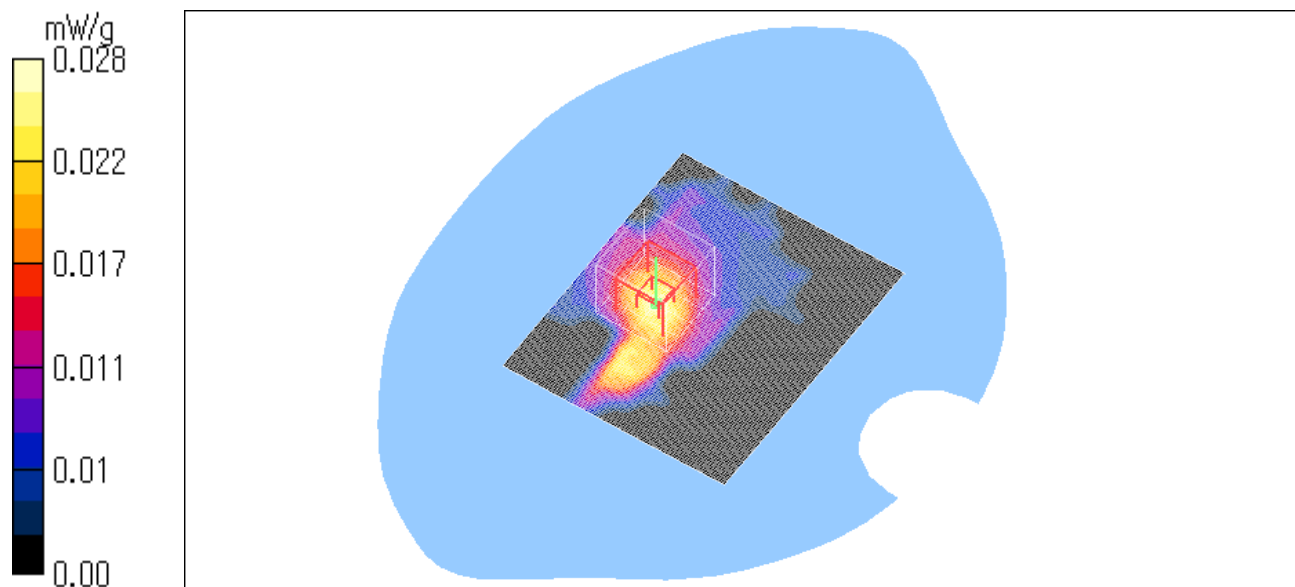

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

3. Measurement data of Bluetooth

XIT-100-BW / Body / Front (Bluetooth) / 2441MHz / Bluetooth Hopping OFF / DH5

Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.97 \text{ mho/m}$; $\epsilon_r = 51.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (121x141x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.00 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.873 V/m; Power Drift = -0.242 dB

Peak SAR (extrapolated) = 0.00 W/kg


SAR(1 g) = 0.0011 mW/g; SAR(10 g) = 0.000331 mW/g

Maximum value of SAR (measured) = 0.00 mW/g

Test Date = 10/28/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.5 degree.C. , After 24.5 degree.C.

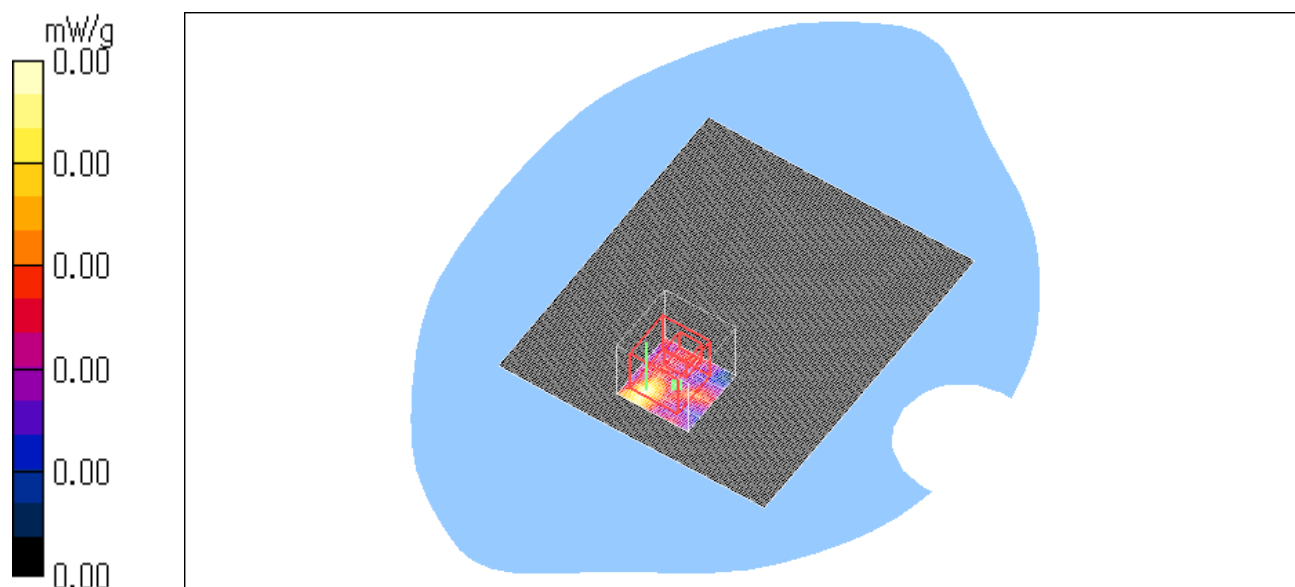

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

XIT-100-BW / Body / Back (Bluetooth) / 2441MHz / Bluetooth Hopping OFF / DH5

Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.97 \text{ mho/m}$; $\epsilon_r = 51.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (121x141x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.00 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.900 V/m; Power Drift = -0.213 dB

Peak SAR (extrapolated) = 0.00 W/kg


SAR(1 g) = 0.000663 mW/g; SAR(10 g) = 0.000155 mW/g

Maximum value of SAR (measured) = 0.00 mW/g

Test Date = 10/28/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.6 degree.C. , After 24.6 degree.C.

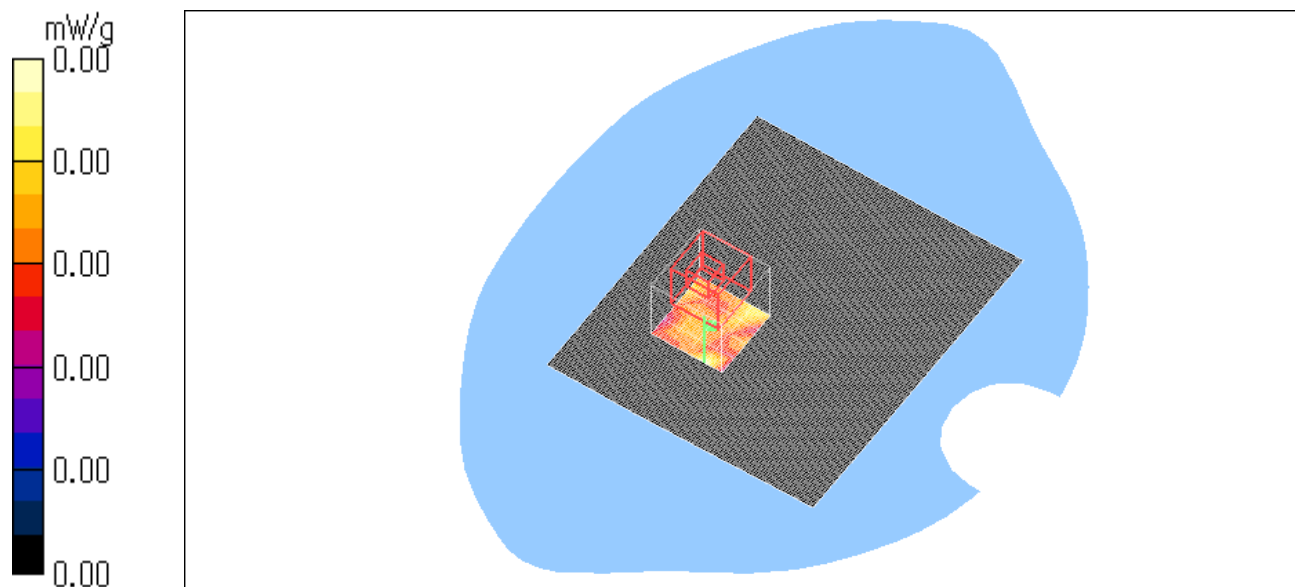

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

XIT-100-BW / Body / Top (Bluetooth) / 2441MHz / Bluetooth Hopping OFF / DH5

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (121x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.00 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.889 V/m; Power Drift = -0.224 dB

Peak SAR (extrapolated) = 0.00 W/kg


SAR(1 g) = 9.34e-005 mW/g; SAR(10 g) = 2.89e-005 mW/g

Maximum value of SAR (measured) = 0.00 mW/g

Test Date = 10/28/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.5 degree.C. , After 24.5 degree.C.

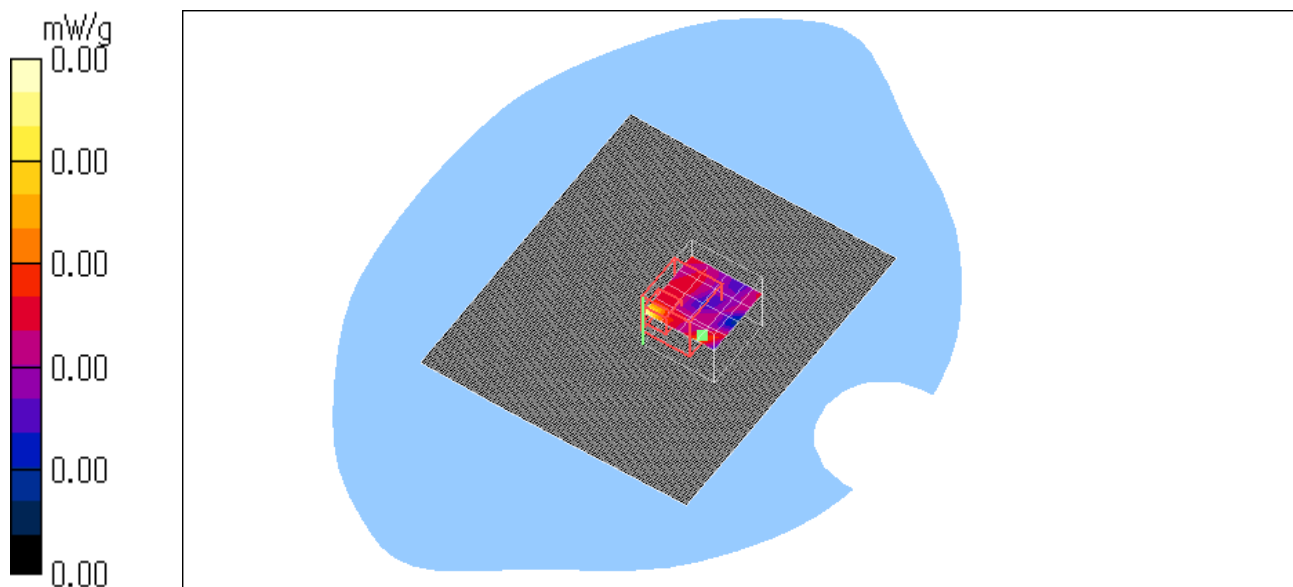

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

XIT-100-BW / Body / Right side (Bluetooth) / 2441MHz / Bluetooth Hopping OFF / DH5

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (121x141x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.00 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0.939 V/m; Power Drift = -0.172 dB

Peak SAR (extrapolated) = 0.00 W/kg


SAR(1 g) = 0.000296 mW/g; SAR(10 g) = 3.68e-005 mW/g

Maximum value of SAR (measured) = 0.00 mW/g

Test Date = 10/28/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.5 degree.C. , After 24.5 degree.C.

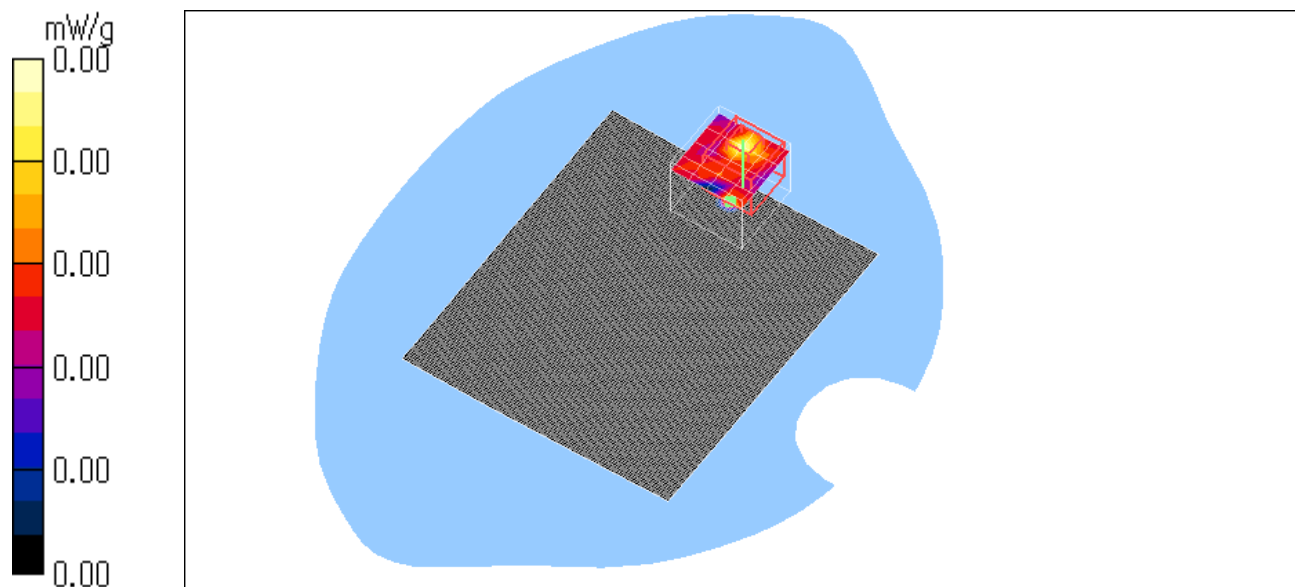

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

XIT-100-BW / Body / Front (Bluetooth) / 2402MHz / Bluetooth Hopping OFF / DH5

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (121x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.00 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$.

Reference Value = 0.730 V/m; Power Drift = 0.233 dB

Peak SAR (extrapolated) = 0.00 W/kg


SAR(1 g) = 0.000241 mW/g; SAR(10 g) = 7.98e-005 mW/g

Maximum value of SAR (measured) = 0.00 mW/g

Test Date = 10/28/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.6 degree.C. , After 24.6 degree.C.

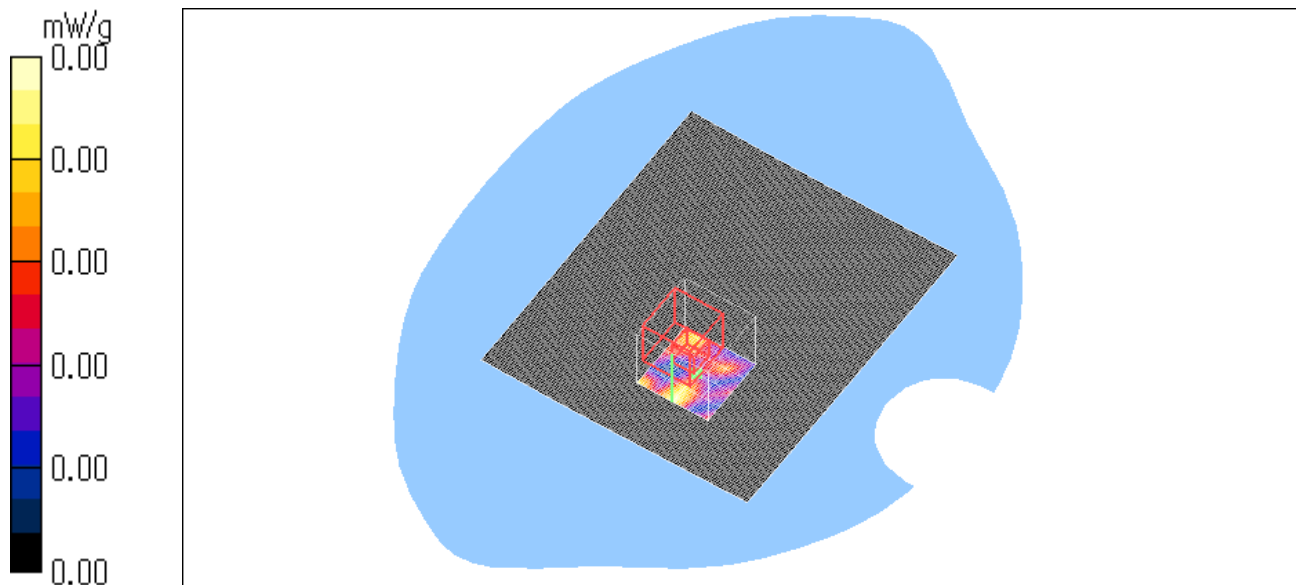

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

XIT-100-BW / Body / Front (Bluetooth) / 2480MHz / Bluetooth Hopping OFF / DH5

Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.97 \text{ mho/m}$; $\epsilon_r = 51.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (121x141x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.00 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.839 V/m ; Power Drift = 0.231 dB

Peak SAR (extrapolated) = 0.00 W/kg


SAR(1 g) = 0.00039 mW/g ; SAR(10 g) = 0.000116 mW/g

Maximum value of SAR (measured) = 0.00 mW/g

Test Date = 10/28/05

Ambient Temperature = 25.0 degree.C .

Liquid Temperature = Before 24.6 degree.C , After 24.5 degree.C .

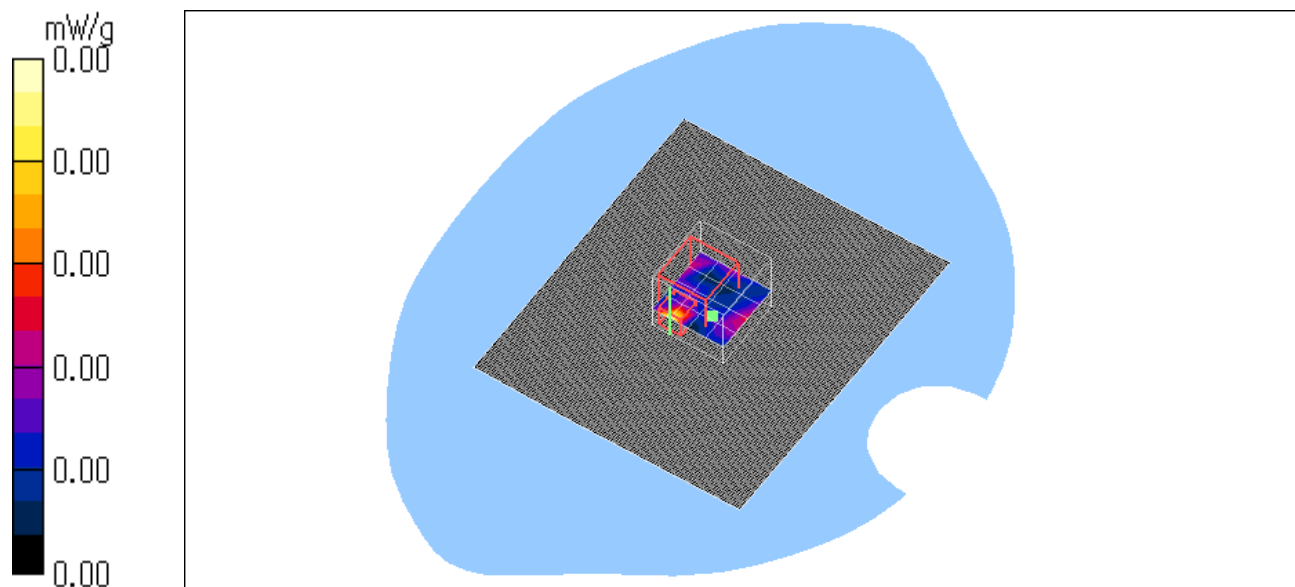

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

XIT-100-BW / Body / Front (Bluetooth) / Bluetooth Hopping ON / DH5

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (121x141x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.00 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0.827 V/m; Power Drift = -0.252 dB

Peak SAR (extrapolated) = 0.00 W/kg


SAR(1 g) = 0.000331 mW/g; SAR(10 g) = 6.77e-005 mW/g

Maximum value of SAR (measured) = 0.00 mW/g

Test Date = 10/28/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.6 degree.C. , After 24.6 degree.C.

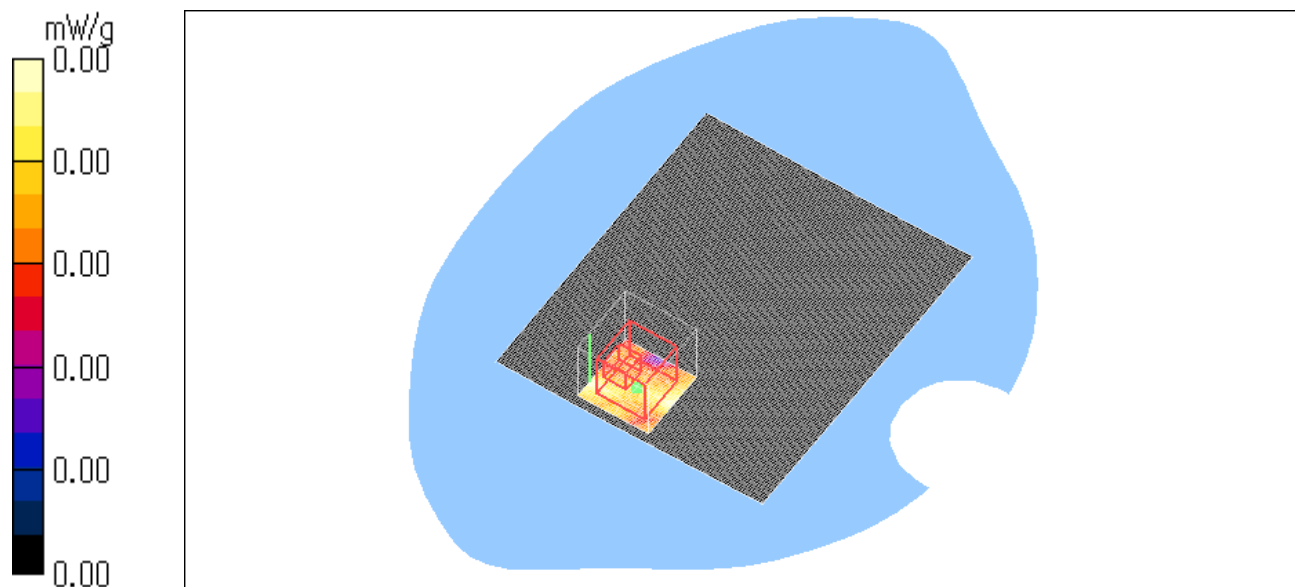

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124