

Test of Aruba AP-175P / MSR2K23N0-XX
802.11a/b/g/n Wireless AP

To: FCC 47 CFR Part 15.247 & IC RSS-210

Test Report Serial No.: ARUB61-U1 Rev A



TEST REPORT

FROM



Test of: Aruba Networks, Inc AP-175P / MSR2K23N0-XX 802.11a/b/g/n
Wireless AP

To: FCC 47 CFR Part 15.247 & IC RSS 210

Test Report Serial No.: ARUB61-U1 Rev A

This report supersedes: NONE

Applicant: Aruba Networks, Inc
1344 Crossman Avenue
Sunnyvale , CA 94089
USA

Product Function: Wireless Access Point

Copy No: pdf **Issue Date:** 1st November 2010

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
440 Boulder Court, Suite 200
Pleasanton, CA 94566 USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



TESTING CERTIFICATE #2381.01

MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 3 of 144

TABLE OF CONTENTS

1	ACCREDITATION, LISTINGS & RECOGNITION	4
1.1	ACCREDITATION	4
1.2	LISTINGS	5
1.3	RECOGNITION	5
2	DOCUMENT HISTORY	6
3	TEST RESULT CERTIFICATE	7
4	REFERENCES AND MEASUREMENT UNCERTAINTY	8
4.1	Normative References	8
4.2	Test and Uncertainty Procedures	9
5	TEST SUMMARY	10
6	PRODUCT DETAILS AND TEST CONFIGURATIONS	11
6.1	EUT Details.....	11
6.2	Scope of Test Program.....	12
6.3	Equipment Model(s) and Serial Number(s)	13
6.4	Antenna Details	13
6.5	Cabling and I/O Ports	14
6.6	Test Configurations.....	14
6.7	Equipment Modifications.....	15
6.8	Deviations from the Test Standard	15
7	TEST RESULTS	16
7.1	Maximum Transmit Power (EIRP)	16
7.2	Maximum Permissible Exposure	19
7.3	Radiated Spurious Emissions - Radio Device	20
7.4	Radiated Spurious Emissions – Digital Apparatus	136
8	TEST EQUIPMENT DETAILS.....	143

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

1 ACCREDITATION, LISTINGS & RECOGNITION

1.1 ACCREDITATION

MiCOM Labs, Inc. an accredited laboratory complies with the international standard EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 5 of 144

1.2 LISTINGS

MiCOM Labs test facilities are listed by the following organizations;

North America

United States of America
Federal Communications Commission (FCC) Listing #: 102167

Canada

Industry Canada (IC) Listing #: 4143A-2

Japan Registration

VCCI Membership Number: 2959

- Radiated 3 meter site; Registration No. R-2881
- Line Conducted, Registration Nos. C-3181 & T-1470
- Emissions; Registration Nos. C-3180 & T-1469

1.3 RECOGNITION

APEC MRA (Asia-Pacific Economic Community Mutual Recognition Agreement)

Conformity Assessment Body (CAB) – MiCOM Labs

Test data generated by MiCOM Labs is accepted in the following countries under the APEC MRA.

Country	Recognition Body	Phase	CAB Identification No.
Australia	Australian Communications and Media Authority (ACMA)	I	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	I	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	I	
Singapore	Infocomm Development Authority (IDA)	I	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	I	
Vietnam	Ministry of Information and Communications	I	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 6 of 144

2 DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	1st November 2010	Initial Release

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 7 of 144

3 TEST RESULT CERTIFICATE

Applicant:	Aruba Networks, Inc 1344 Crossman Avenue Sunnyvale California , 94089, USA	Tested By:	MiCOM Labs, Inc. 440 Boulder Court Suite 200 Pleasanton California, 94566, USA
EUT	802.11a/b/g/n Wireless AP	Tel:	+1 925 462 0304
Model	AP-175P / MSR2K23N0-XX	Fax:	+1 925 462 0306
S/No's:	25A02102800027		
Test Date(s)	23 rd Sept – 7 th Oct 2010	Website:	www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 15, SubPart 15.247	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.


Approved & Released for MiCOM Labs, Inc. by:



TESTING CERTIFICATE #2381.01



Graeme Grieve
Quality Manager MiCOM Labs,



Gordon Hurst
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 8 of 144

4 REFERENCES AND MEASUREMENT UNCERTAINTY

4.1 Normative References

Ref.	Publication	Year	Title
i.	47 CFR Part 15, SubPart 15.247	2009	For Digitally Modulated Intentional Radiators
ii.	Industry Canada RSS-210	Issue 7 June 2007	Low Power License-Exempt Radiocommunication Devices (All Frequency Bands): Category 1 Equipment
iii.	Industry Canada RSS-Gen	Issue 2 June 2007	General Requirements and Information for the Certification of Radiocommunication Equipment
iv.	ANSI C63.4	2003	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
v.	CISPR 22/ EN 55022	2005	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
vi.	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
vii.	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
viii.	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
ix.	A2LA	14 th September 2005	Reference to A2LA Accreditation Status – A2LA Advertising Policy

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 9 of 144

4.2 Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 10 of 144

5 TEST SUMMARY

List of Measurements:

Standard Section(s)	Test Description	Condition	Result	Test Report Section
15.247 (b) (3) RSS-210 A8	Maximum Conducted Power & EIRP	Conducted	Compliant	7.1
1.1310 RSS-GEN §5.5	Maximum Permissible Exposure	Calculated	Compliant	7.2
(d), 15.205, 15.209	Transmitter Radiated Spurious Emissions	Radiated	Compliant	7.3
(d), 15.205, 15.209	Transmitter Band-Edge Emissions	Radiated	Compliant	
RSS-GEN	Transmitter Peak Emissions	Radiated	Compliant	
RSS-GEN	Transmitter Receiver Emissions	Radiated	Compliant	
15.205	Radiated (Digital) Emissions	Radiated	Compliant	7.4

Note 1: Test results reported in this document relate only to the items tested

Note 2: The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

Note 3: Section 6.7 Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 11 of 144

6 PRODUCT DETAILS AND TEST CONFIGURATIONS

6.1 EUT Details

Detail	Description
Purpose:	Test of the Aruba Networks, Inc AP-175P / MSR2K23N0-XX 802.11a/b/g/n Wireless Access Point for compliance against FCC 47 CFR Part 15, SubPart 15.247 and Industry Canada RSS-210 regulations.
Applicant:	Aruba Networks, Inc 1344 Crossman Avenue Sunnyvale , CA 94089 USA
Manufacturer:	As manufacturer
Test Laboratory:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA
Test report reference number:	ARUB61-U1 Rev A
Date EUT received:	23 rd September 2010
Dates of test (from - to):	23 rd Sept – 7 th Oct 2010
No of Units Tested:	1
Product Name:	AP-175P / MSR2K23N0-XX
Manufacturers Trade Name:	Wireless Access Point
Equipment Primary Function:	802.11a/b/g/n Wireless Access Point, 2x2 Spatial Multiplexing MIMO configuration
Type of Technology:	802.11a/b/g/n
Installation type:	Fixed
Construction/Location for Use:	Outdoor only
Software/Firmware Release:	Build# 75568 Version: 5.0.7.1
Transmit/Receive Operation:	TDD (Time Div Duplex)
Output Power Type	Stepped
Rated Input Voltage and Current:	Power Over Ethernet (POE) 48 Vdc @ 1.25 A
Operating Temperature Range:	Nominal: 20 °C Max: 50 °C Min: 0 °C
ITU Emission Designator(s):	2400 – 2483.5 MHz 802.11b 15M6G1D 2400 – 2483.5 MHz 802.11g 16M5D1D 2400 – 2483.5 MHz 802.11n – HT-20 17M8D1D 2400 – 2483.5 MHz 802.11n – HT-40 35M9D1D 5725 – 5850 MHz 802.11a 16M6D1D 5725 – 5850 MHz 802.11n – HT-20 17M8D1D 5725 – 5850 MHz 802.11n – HT-40 36M4D1D
Long Term Frequency Stability:	±20 ppm
Equipment Dimensions:	10.2" x 10.2" x 4.0" (25.9cm x 25.9cm x 10.2cm)
Weight:	7lbs (3.25 kgs)
Primary function of equipment:	Wireless Access Point for transmitting data and voice

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 12 of 144

6.2 Scope of Test Program

The scope of the compliance program was to test the Aruba Networks Inc AP-175P / MSR2K23N0-XX 802.11 a/b/g/n AP wireless Access Point, 2x2 Spatial Multiplexing MIMO configurations in the frequency ranges 2400 – 2483.5 MHz and 5725 - 5850 MHz for compliance against FCC 47 CFR Part 15.247 and Industry Canada RSS-210 specifications for Radiated Emissions.

The Aruba Networks AP-175P / MSR2K23N0-XX has external antennas with N-type connectors. The device has two radios with two transmit and receive antennae. The antennas used with the AP-175P / MSR2K23N0-XX are detailed in section 6.4 "Antenna Details".

The Aruba Networks AP-175P / MSR2K23N0-XX contains two WLAN 802.11a/b/g/n MiniPCI modules model DNMA-H92. The results for conducted testing for compliance to the requirements of FCC Pt 15.247 & IC RSS-210 Annex 8 are reported in Sportan International Inc test report No. FR9N1919-01AB.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 13 of 144

6.3 Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	802.11 a/b/g/n Wireless Access Point	Aruba Networks Inc	AP-175P	25A02102800027
Support	Power Over Ethernet (POE) 48Vdc supply	PowerDsine	7100G	740000000004
Support	Laptop PC – ThinkPad	IBM	T60	-
Support	Laptop PC – ThinkPad	IBM	T30	-
Support	Switch Controller	Aruba Networks Inc	620	AE0000949

6.4 Antenna Details

The following is a description of the EUT antennas.

Antenna Type:	Manufacturer	Model	Gain (dBi)	Frequency Range (MHz)
Dipole	Aruba	AP-ANT-80D	8	2400 – 2500 MHz
Dipole	Aruba	AP-ANT-86	9	5150 – 5875 MHz
Directional	Aruba	AP-ANT-85	15	2400 – 2500 MHz
Directional	Aruba	AP-ANT-89	13.25	5470 – 5875 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 14 of 144

6.5 Cabling and I/O Ports

Number and type of I/O ports on supporting wireless access point

1. 1000/100/10 Ethernet with POE x 1.
2. USB Local maintenance terminal (LMT) x 1.

6.6 Test Configurations

Testing was performed to determine the highest power level versus bit rate. The variant with the highest power was used to exercise the product.

Operational Mode(s) (802.11a/b/g/n)	Variant	Data Rate with Highest Power	Frequencies (MHz)
b	Legacy	1 MBit/s	2,412
g	Legacy	6 MBit/s	2,437
n	HT-20	6.5 MCS	2,462
	HT-40	13.5 MCS	2,422
			2,437
a	Legacy	6 MBit/s	2,452
n	Legacy	6 MBit/s	5,745
	HT-20	6.5 MCS	5,785
	HT-40	13.5 MCS	5,825
			5,755
			5,785
			5,815

Legacy – data rates for 802.11a/b/g products

Results for the above configurations are provided in this report



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 15 of 144

6.7 Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. None

6.8 Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. None



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 16 of 144

7 TEST RESULTS

7.1 Maximum Transmit Power (EIRP)

Output power measurements were taken from the EUT various power settings for each operational mode. An output power V's antenna gain matrix has been generated for worst case conditions. Power levels for each frequency and operational mode has been taken into consideration in the generation of the following matrix.

The quoted EIRP is the maximum allowable for the antenna gain.

2,400 – 2483.5 MHz Operation

Antenna Gains

Antenna Type:	Manufacturer	Model	Gain (dBi)	Frequency Range (MHz)
Dipole	Aruba	AP-ANT-80D	8	2400 – 2500 MHz
Directional	Aruba	AP-ANT-85	15	2400 – 2500 MHz

Frequency Band 2400-2483.5 MHz

Power Setting	Port A (dBm)	Port B (dBm)	Calculated Combined Power Level (dBm)	EIRP V's Antenna Gain (dBm/EIRP)	
				8 dBi	15 dBi
4	1.39	1.59	4.5	+12.5	+19.5
8	4.86	7.21	9.2	+17.2	+24.2
9	5.77	8.63	10.4	+18.4	+25.4
10	6.54	9.61	11.4	+19.4	+26.4
17	16.58	16.83	19.7	+27.7	+34.7
18	17.64	17.85	20.7	+28.7	+35.7
19	18.75	18.91	21.8	+29.8	
20	19.56	19.83	22.7	+30.7	

Note: Maximum transmit EIRP = +36 dBm. The conducted power level setting for a particular antenna is restricted to boxes with an EIRP value in the above table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 17 of 144

5,725 – 5,850 MHz Operation

Antenna Gains

Antenna Type:	Manufacturer	Model	Gain (dBi)	Frequency Range (MHz)
Dipole	Aruba	AP-ANT-86	9	5150 – 5875 MHz
Directional	Aruba	AP-ANT-89	13.25	5470 – 5875 MHz

Frequency Band 5725-5850

Power Setting	Port A (dBm)	Port B (dBm)	Calculated Combined Power Level (dBm)	EIRP V's Antenna Gain (dBm/EIRP)	
				9 dBi	13.25 dBi
9	8.05	8.92	11.6	+20.6	+24.8
10	8.72	10.06	12.5	+21.5	+25.7
11	10.51	11.04	13.8	+22.8	+27.1
12	12.39	11.78	15.1	+24.1	+28.4
13	13.34	12.65	16.1	+25.1	+29.3
14	14.62	13.92	17.4	+26.4	+30.6
15	15.71	15.06	18.5	+27.5	+31.7
16	16.51	15.93	19.3	+28.3	+32.6
17	17.72	16.36	20.1	+29.1	+33.4
18	18.47	17.85	21.2	+30.2	+34.5
19	19.83	18.92	22.5	+31.5	+35.7
20	21.07	20.03	23.7	+32.7	

Note: Maximum transmit EIRP = +36 dBm. The conducted power level setting for a particular antenna is restricted to boxes with an EIRP value in the above table.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 18 of 144

Specification

Limits

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following

(3) For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Laboratory Uncertainty for Power Measurement(s)

Measurement uncertainty	±1.33dB
-------------------------	---------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0070, 0075, 0116, 0156, 0193, 0252, 0313, 0314

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



7.2 Maximum Permissible Exposure

FCC, Part 15 Subpart C §15.247(i)

Industry Canada RSS-Gen §5.5

Calculations for Maximum Permissible Exposure Levels

$$\text{Power Density} = P_d \text{ (mW/cm}^2\text{)} = \text{EIRP}/(4\pi d^2)$$

$$\text{EIRP} = P * G * 2$$

P = Peak output power (mW)

G = Antenna numeric gain (numeric)

d = Separation distance (cm)

$$\text{Numeric Gain} = 10^{(G \text{ (dBi)}/10)}$$

The Aruba AP-175P / MSR2K23N0-XX has two transmitters. The peak power used in the table below is the highest conducted level used to meet the EIRP requirements.

Because the EUT belongs to the General Population/Uncontrolled Exposure the limit of power density is 1.0 mW/cm²

Freq. Band (MHz)	Antenna Gain (dBi)	Antenna Numeric Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Calculated Safe Distance @ 1mW/cm ² Limit(cm)	Minimum Separation Distance (cm)
2400 – 2500	15.0	31.62	+20.7	117.5	17.2	20.00
5725 - 5850	13.25	21.10	+22.1	162.2	16.5	20.00

Note: for mobile or fixed location transmitters the minimum separation distance is 20cm, even if calculations indicate the MPE distance to be less.

Specification

Maximum Permissible Exposure Limits

FCC §1.1310 Limit = 1mW / cm² from 1.310 Table 1

RSS-Gen §5.5 Before equipment certification is granted, the application requirements of RSS-102 shall be met.

Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty

±1.33 dB



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 20 of 144

7.3 Radiated Spurious Emissions - Radio Device


Test Procedure

Testing was performed in a 3-meter anechoic chamber. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. Preliminary emissions were recorded with in Spectrum Analyzer mode, using a maximum peak detector while in peak hold mode.

Emissions nearest the limits were chosen for maximization and formal measurement using a CISPR Compliant receiver. Emissions above 1000 MHz are measured utilizing a CISPR compliant average detector with a tuned receiver, using a bandwidth of 1 MHz. Emissions from 30 MHz – 1000 MHz are measured utilizing a CISPR compliant quasi-peak detector with a tuned receiver, using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed.


Test Measurement Set Up

Radiated emissions above 1 GHz

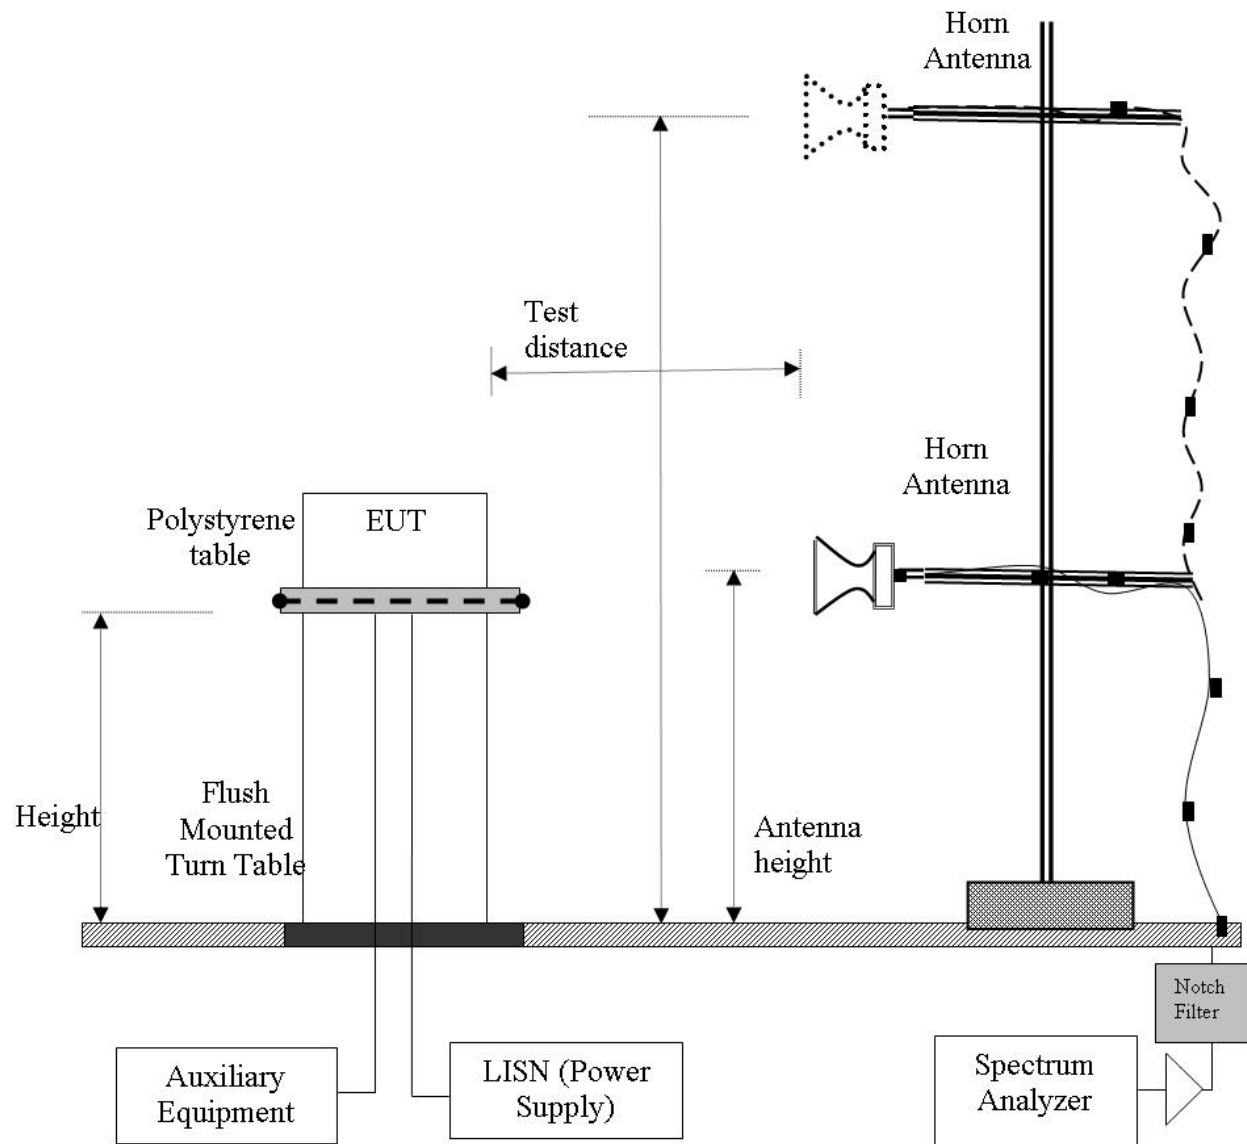

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Radiated emissions below 1 GHz

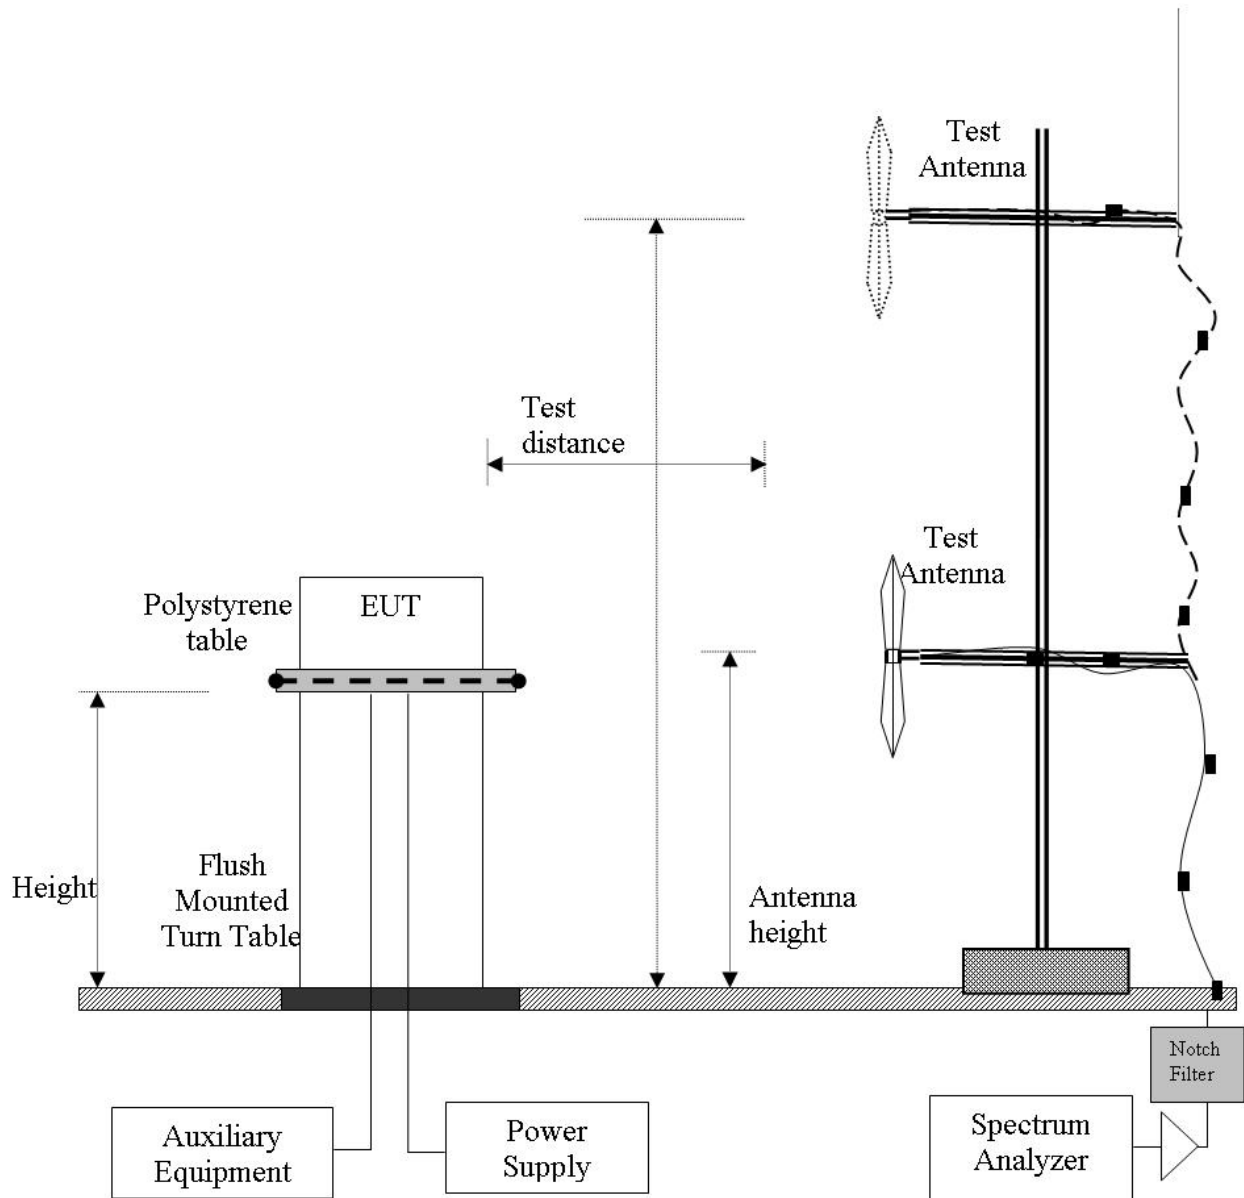



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 23 of 144

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

$$CORR = \text{Correction Factor} = CL - AG + NFL$$

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

Field Strength Calculation Example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 24 of 144

Specification

Transmitter Radiated Spurious Emissions

FCC §15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section §15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(a)).

FCC §15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

FCC §15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

FCC §15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 25 of 144

Receiver Spurious Emissions

Industry Canada RSS-Gen §4.10,

The search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator, intermediate or carrier frequency), or 30 MHz, whichever is the higher, to at least 3 times the highest tunable or local oscillator frequency, whichever is the higher, without exceeding 40 GHz.

RSS-Gen §6

The following receiver spurious emission limits shall be complied with;

(a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 1.

Table 1: FCC 15.209 Spurious Emissions Limits

Frequency (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Laboratory Measurement Uncertainty for Spectrum Measurement

Measurement Uncertainty	+5.6/ -4.5 dB
--------------------------------	---------------

Traceability:

Method	Test Equipment Used
Work instruction WI-03	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 26 of 144

7.3.1 AP-ANT-80D 2.4GHz - Transmitter Radiated Spurious Emissions – Above 1 GHz

Test Freq.	2412 M-hz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	29
Freq. Range	1000 M-hz - 18000 M-hz	Rel. Hum.(%)	29
Power Setting	18.5	Press. (mBars)	993
Antenna	APANT-80D	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

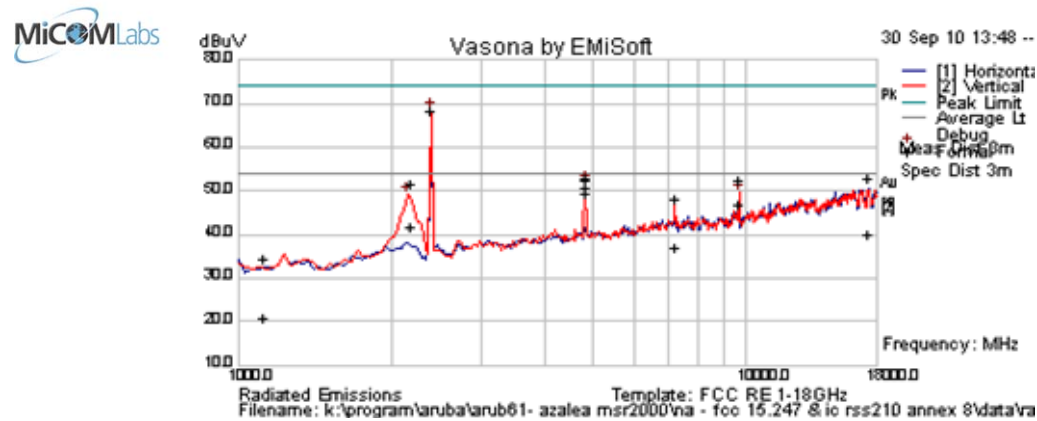

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	PoI	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
4824.033	57.3	4.5	-9.4	52.3	Peak Max	V	118	150	74.0	-21.7	Pass	RB
17320.24	42.4	8.7	1.8	52.9	Peak Max	H	> 20dB below fundamental				Pass	NRB
9647.916	49.6	6.3	-3.3	52.6	Peak Max	V	> 20dB below fundamental				Pass	NRB
2184.128	60.2	2.9	-11.5	51.6	Peak Max	V	> 20dB below fundamental				Pass	NRB
1127.172	47.9	2.1	-15.7	34.3	Peak Max	V	169	37	74	-39.7	Pass	RB
7240.599	47.7	5.4	-5.0	48.0	Peak Max	V	> 20dB below fundamental				Pass	NRB
4823.961	58.0	4.5	-9.4	53.1	Peak Max	V	118	147	74	-20.9	Pass	RB
4824.033	54.4	4.5	-9.4	49.4	Average Max	V	118	150	54	-4.6	Pass	RB
17320.240	29.7	8.7	1.8	40.2	Average Max	H	> 20dB below fundamental				Pass	NRB
9647.916	44.0	6.3	-3.3	46.9	Average Max	V	> 20dB below fundamental				Pass	NRB
2184.128	50.3	2.9	-11.5	41.7	Average Max	V	> 20dB below fundamental				Pass	NRB
1127.172	34.4	2.1	-15.7	20.8	Average Max	V	169	37	54	-33.3	Pass	RB
7240.599	36.6	5.4	-5.0	37.0	Average Max	V	> 20dB below fundamental				Pass	NRB
4823.961	55.8	4.5	-9.4	50.8	Average Max	V	118	147	54	-3.2	Pass	RB
2396.794	76.5	3.0	-11.2	68.3	Peak [Scan]	V	100	--	--	--	n/a	Fund

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission


RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 27 of 144

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	29
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	29
Power Setting	20	Press. (mBars)	993
Antenna	AP ANT-80D	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

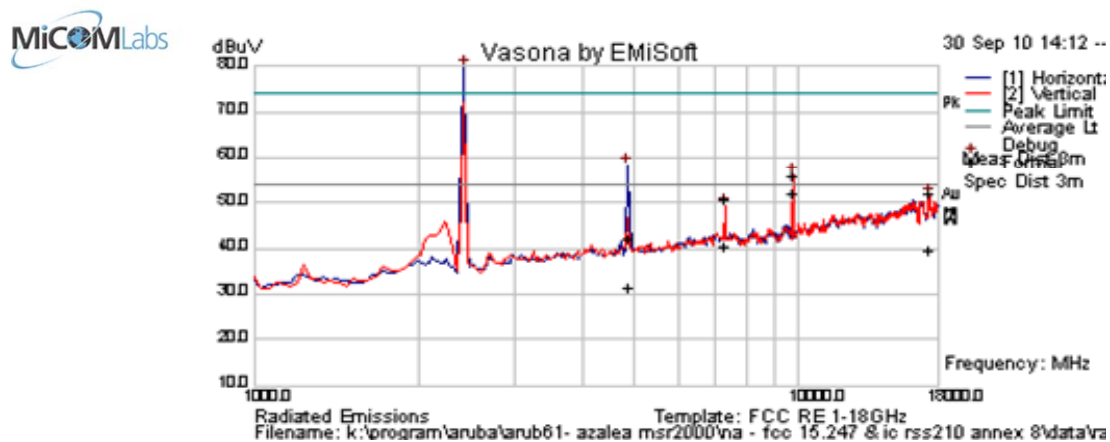

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
4873.953	47.2	4.5	-9.3	42.3	Peak Max	H	107	239	74.0	-31.7	Pass	RB
9747.916	53.2	6.4	-3.6	55.9	Peak Max	V	> 20dB below fundamental				Pass	NRB
7313.006	50.4	5.4	-5.0	50.9	Peak Max	V	184	242	74	-23.1	Pass	RB
17420.842	41.3	8.7	1.9	52.0	Peak Max	V	> 20dB below fundamental				Pass	NRB
4873.953	36.5	4.5	-9.3	31.7	Average Max	H	107	239	54	-22.3	Pass	RB
9747.916	49.4	6.4	-3.6	52.2	Average Max	V	> 20dB below fundamental				Pass	NRB
7313.006	40.2	5.4	-5.0	40.7	Average Max	V	184	242	54	-13.3	Pass	RB
17420.842	28.9	8.7	1.9	39.5	Average Max	V	> 20dB below fundamental				Pass	NRB
2430.862	87.7	3.0	-11.1	79.5	Peak [Scan]	H	150	--	--	--	n/a	Fund


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 28 of 144

Test Freq.	2462 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	29
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	29
Power Setting	19.5	Press. (mBars)	993
Antenna	AP ANT-80D	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

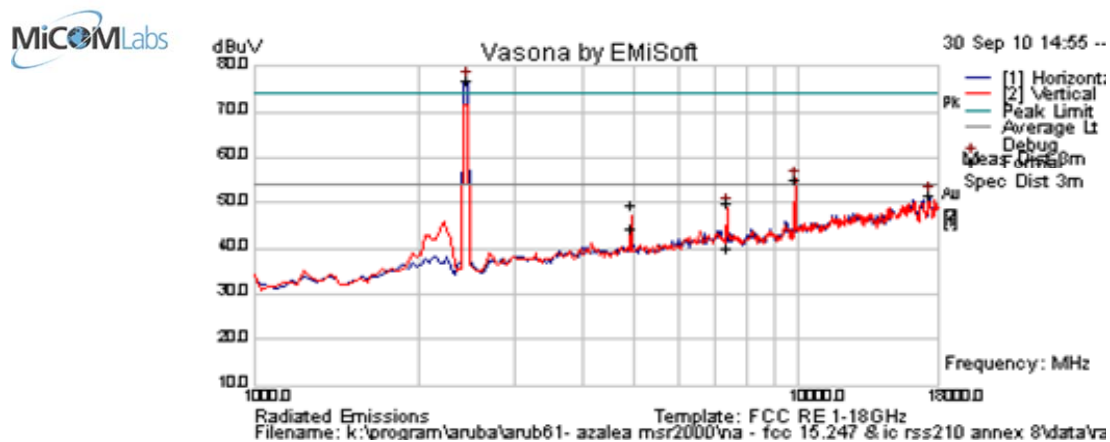

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
7389.579	49.1	5.5	-4.8	49.8	Peak Max	V	130	345	74.0	-24.2	Pass	RB
4923.998	53.9	4.6	-9.1	49.3	Peak Max	V	117	77	74.0	-24.7	Pass	RB
7389.579	39.5	5.5	-4.8	40.2	Average Max	V	130	345	54	-13.8	Pass	RB
4923.998	49.0	4.6	-9.1	44.5	Average Max	V	117	77	54	-9.5	Pass	RB
9857.715	51.9	6.4	-3.3	55.1	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
17352.705	40.8	8.7	2.0	51.5	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
2464.930	85.0	3.0	-11.1	76.9	Peak [Scan]	H	100	--	--	--	n/a	Fund
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 29 of 144

Test Freq.	2412 MHz	Engineer	SB
Variant	802.11g; 6 Mbs	Temp (°C)	29
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	29
Power Setting	15.5	Press. (mBars)	993
Antenna	AP ANT-80D	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

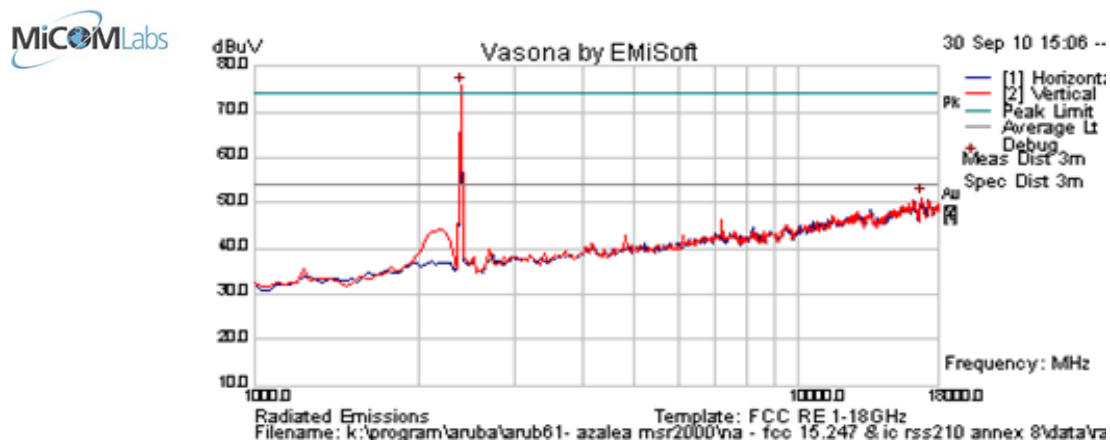

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
2396.794	84.0	3.0	-11.2	75.8	Peak [Scan]	V	150	--	--	--	n/a	Fund
16807.615	40.9	8.6	1.6	51.1	Peak [Scan]	H	> 20dB below fundamental			Pass	NRB	
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 30 of 144

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11g; 6 Mbs	Temp (°C)	29
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	29
Power Setting	20	Press. (mBars)	993
Antenna	AP ANT-80D	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

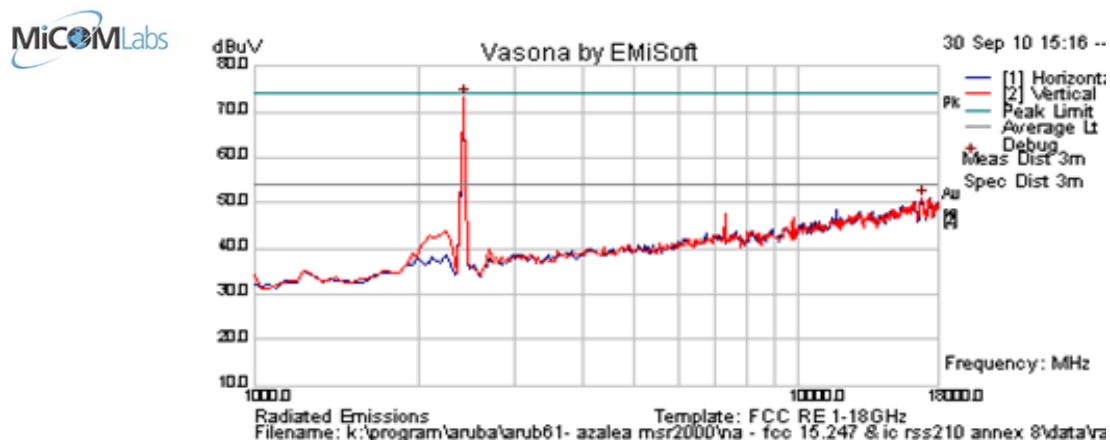

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
2430.862	81.3	3.0	-11.1	73.2	Peak [Scan]	V	150	--	--	--	n/a	Fund
16841.683	40.7	8.6	1.8	51.0	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 31 of 144

Test Freq.	2462 MHz	Engineer	SB
Variant	802.11g; 6 Mbs	Temp (°C)	29
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	29
Power Setting	15.5	Press. (mBars)	993
Antenna	AP ANT-80D	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

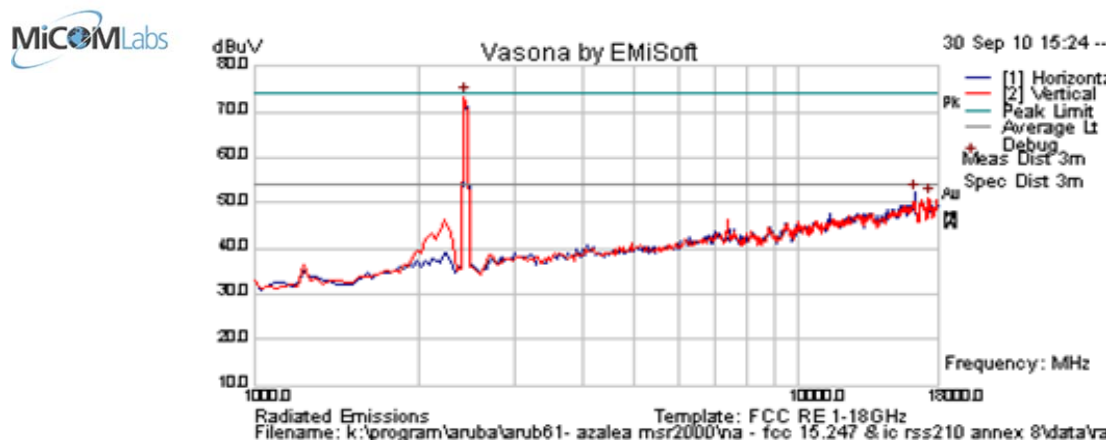

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
2430.862	81.6	3.0	-11.1	73.5	Peak [Scan]	V	150	--	--	--	n/a	Fund
16364.729	43.0	8.9	0.4	52.3	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
17318.637	40.7	8.7	1.7	51.1	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 32 of 144

Test Freq.	2412 MHz	Engineer	SB
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	29
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	29
Power Setting	15	Press. (mBars)	993
Antenna	AP ANT-80D	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

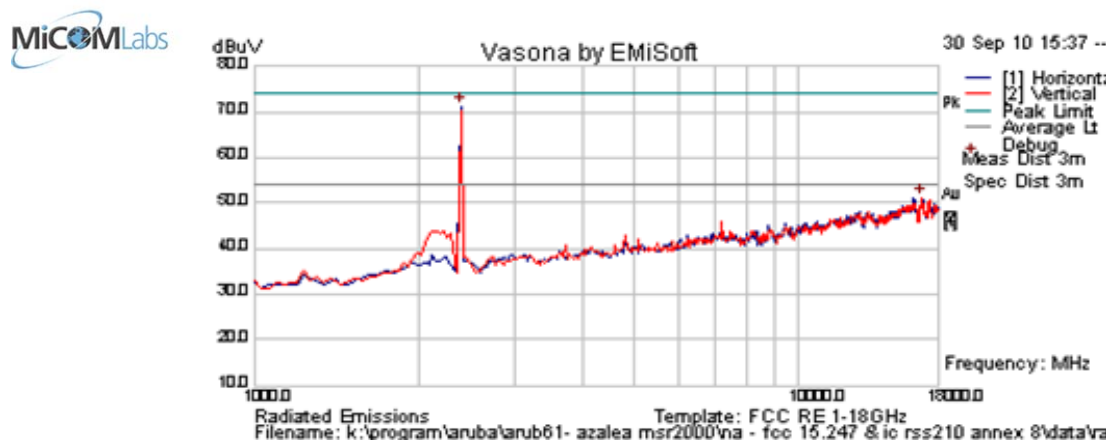

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
2396.794	79.5	3.0	-11.2	71.3	Peak [Scan]	H	150	--	--	--	n/a	Fund
16807.615	40.9	8.6	1.6	51.1	Peak [Scan]	V	> 20dB below fundamental			Pass	NRB	
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 33 of 144

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	29
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	29
Power Setting	20	Press. (mBars)	993
Antenna	AP ANT-80D	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

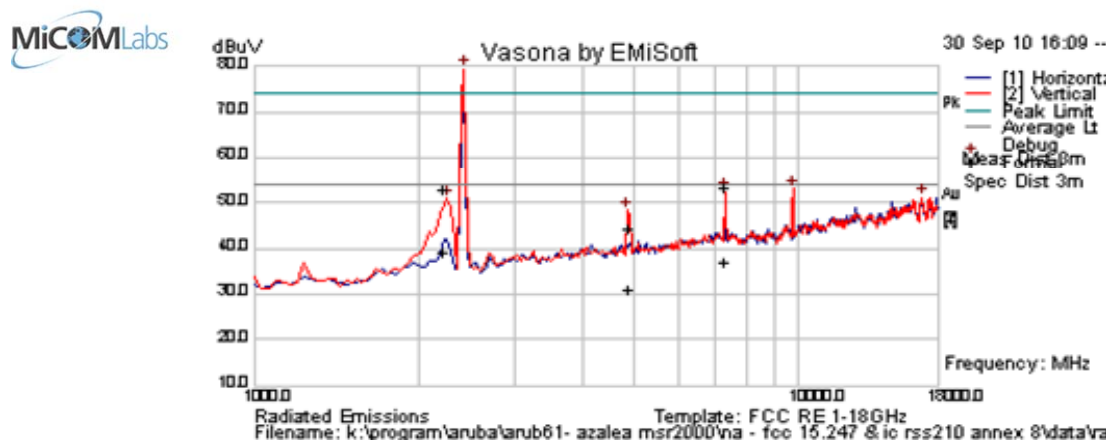

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
7311.824	52.8	5.4	-4.9	53.3	Peak Max	V	192	242	74.0	-20.7	Pass	RB
2227.495	61.6	2.9	-11.4	53.1	Peak Max	V	113	77	74.0	-21.0	Pass	RB
4870.621	48.9	4.5	-9.3	44.1	Peak Max	V	126	175	74	-29.9	Pass	RB
7311.824	36.6	5.4	-4.9	37.1	Average Max	V	192	242	54	-16.9	Pass	RB
2227.495	47.5	2.9	-11.4	39.0	Average Max	V	113	77	54	-15.0	Pass	RB
4870.621	36.0	4.5	-9.3	31.2	Average Max	V	126	175	54	-22.8	Pass	RB
2430.862	87.6	3.0	-11.1	79.5	Peak [Scan]	V	150	--	--	--	n/a	Fund
16841.683	40.7	8.6	1.8	51.1	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
9755.511	50.3	6.4	-3.7	53.0	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 34 of 144

Test Freq.	2462 MHz	Engineer	SB
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	29
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	29
Power Setting	14.5	Press. (mBars)	993
Antenna	AP ANT-80D	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

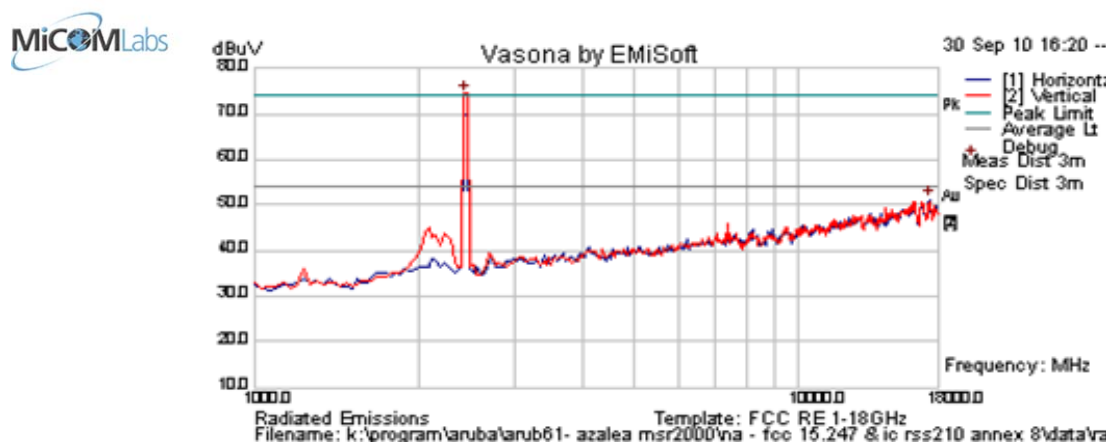

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
2430.862	82.7	3.0	-11.1	74.5	Peak [Scan]	V	150	--	--	--	n/a	Fund
17352.705	40.5	8.7	2.0	51.2	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 35 of 144

Test Freq.	2422 MHz	Engineer	SB
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	26.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	11	Press. (mBars)	996
Antenna	AP ANT 80D	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

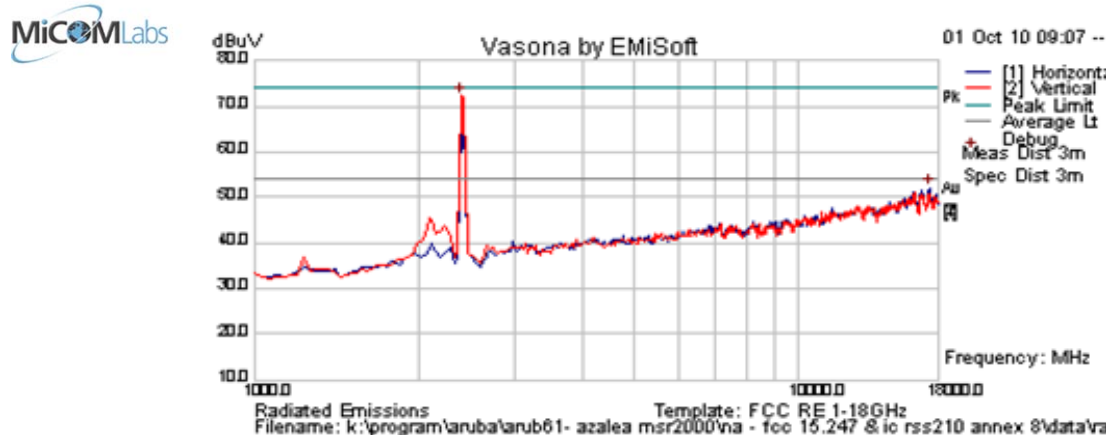

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
2396.794	80.5	3.0	-11.2	72.3	Peak [Scan]	V	150	--	--	--	n/a	Fund
17352.705	41.3	8.7	2.0	52.0	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 36 of 144

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	26.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	20	Press. (mBars)	996
Antenna	AP ANT 80D	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

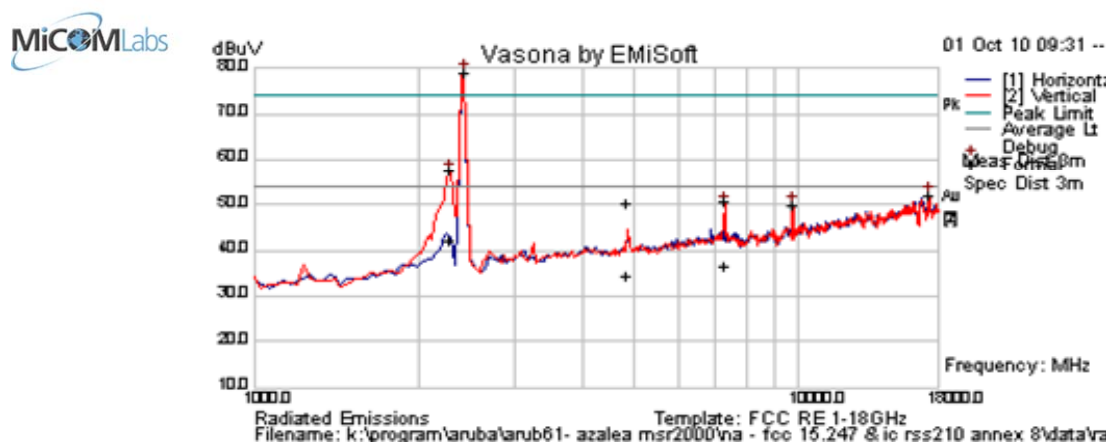

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
2288.101	66.0	2.9	-11.3	57.7	Peak Max	V	106	86	74.0	-16.4	Pass	RB
7317.515	50.4	5.4	-5.0	50.8	Peak Max	V	98	241	74.0	-23.2	Pass	RB
4854.970	55.2	4.5	-9.3	50.4	Peak Max	V	114	145	74	-23.6	Pass	RB
2288.101	50.4	2.9	-11.3	42.1	Average Max	V	106	86	54	-11.9	Pass	RB
7317.515	36.0	5.4	-5.0	36.4	Average Max	V	98	241	54	-17.6	Pass	RB
4854.970	39.3	4.5	-9.3	34.4	Average Max	V	114	145	54	-19.6	Pass	RB
2430.862	87.4	3.0	-11.1	79.2	Peak [Scan]	H	150	--	--	--	n/a	Fund
17352.705	41.2	8.7	2.0	51.9	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
9721.443	46.9	6.3	-3.3	50.0	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 37 of 144

Test Freq.	2452 MHz	Engineer	SB
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	26.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	12	Press. (mBars)	996
Antenna	AP ANT 80D	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

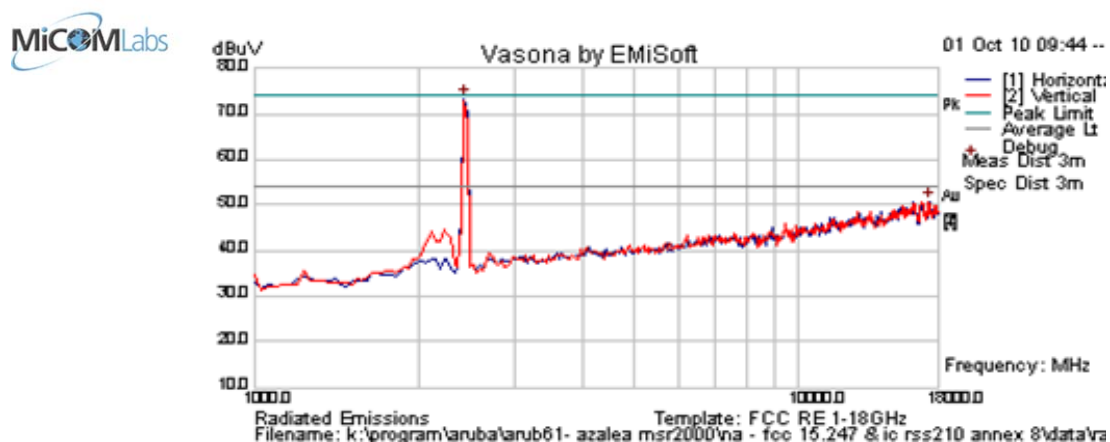

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
2430.862	81.6	3.0	-11.1	73.4	Peak [Scan]	H	150	--	--	--	n/a	Fund
17284.569	40.5	8.6	1.6	50.7	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 38 of 144

7.3.2 AP-ANT-80D 2.4GHz - Transmitter Band Edge Emissions

ARUB61 Band Edge 2412 MHz; 802.11b 2200-2390 MHz ART=18.5

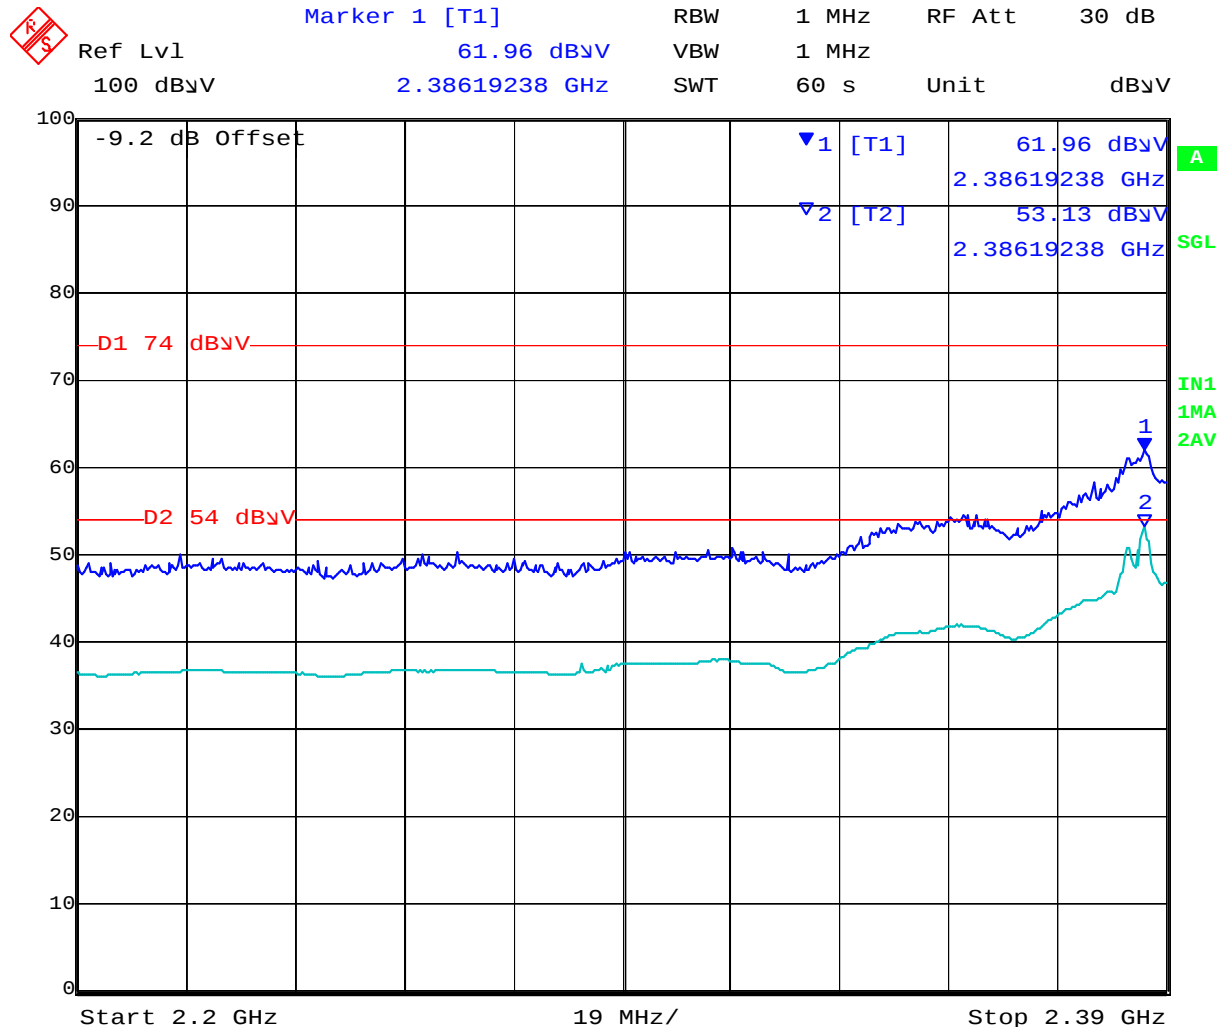


Date: 24.SEP.2010 07:21:32

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 39 of 144

ARUB61 Band Edge 2462 MHz; 802.11b 2483.5-2500 MHz ART=19.5

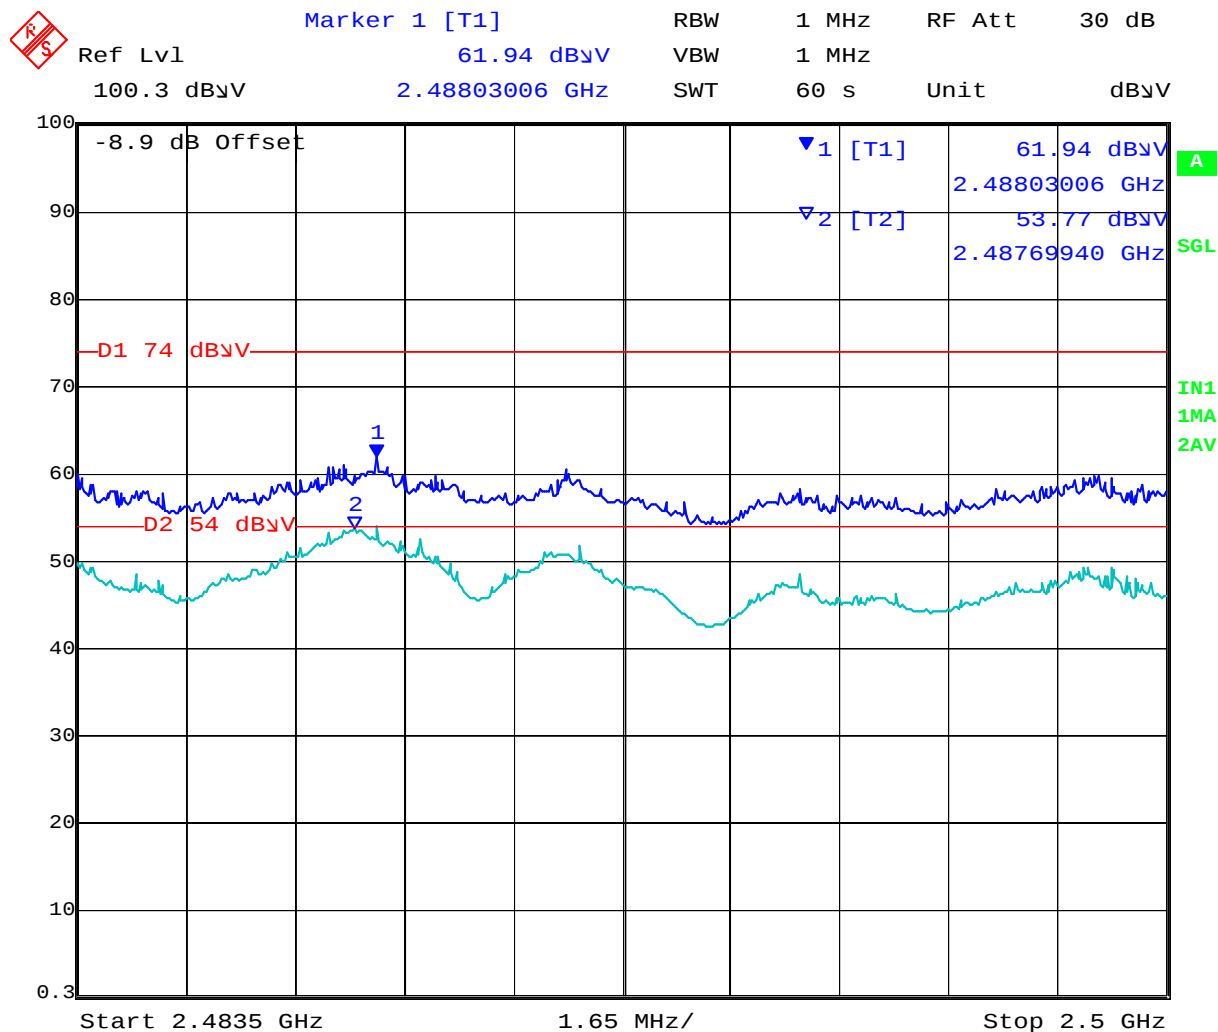


Date: 24.SEP.2010 08:06:36

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 40 of 144

ARUB61 Band Edge 2412 MHz; 802.11g 2200-2390 MHz ART=15.5

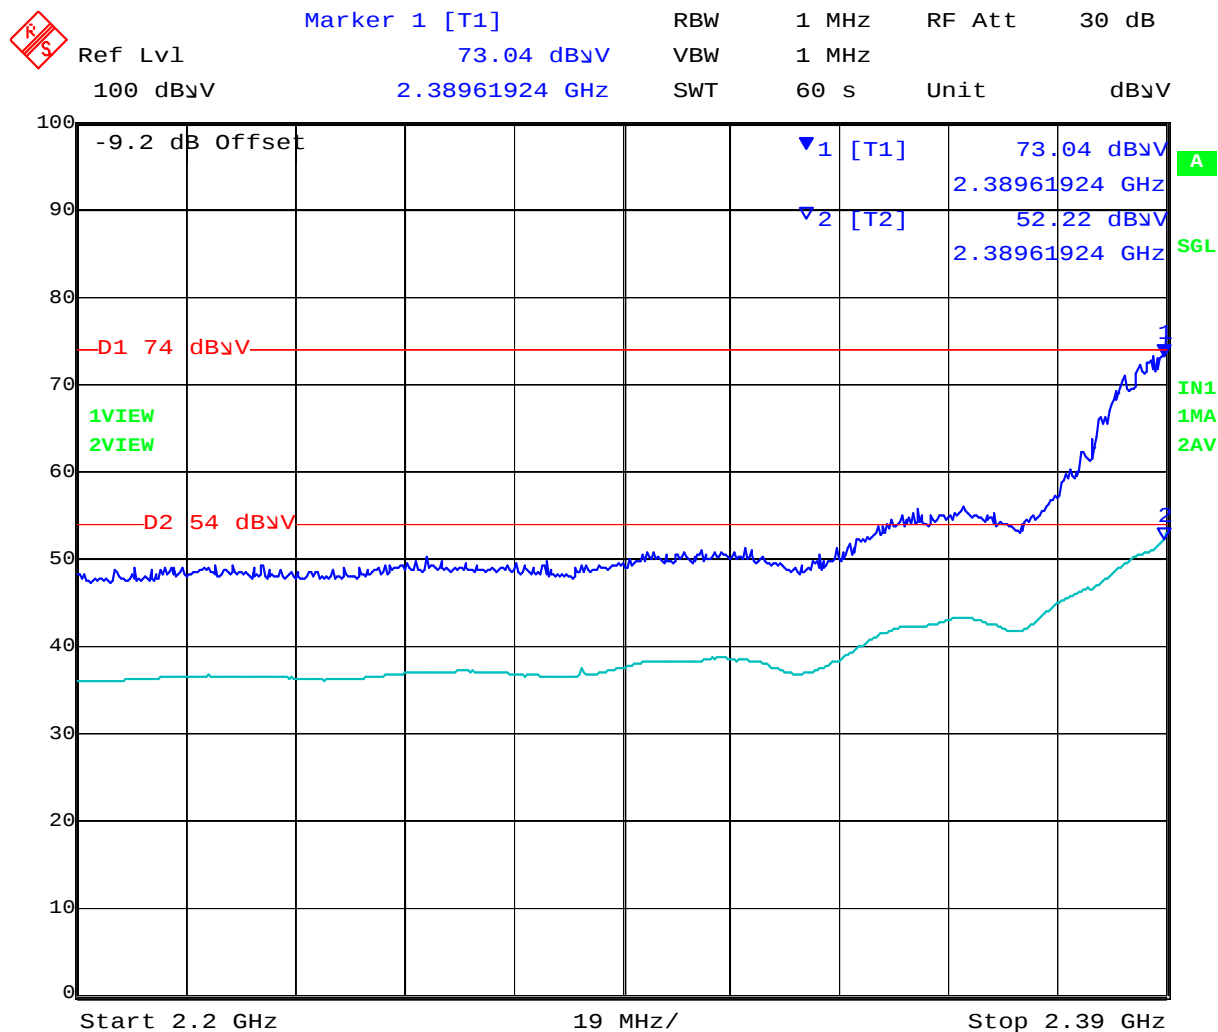


Date: 24.SEP.2010 07:34:49

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 41 of 144

ARUB61 Band Edge 2462 MHz; 802.11g 2483.5-2500 MHz ART=15.5

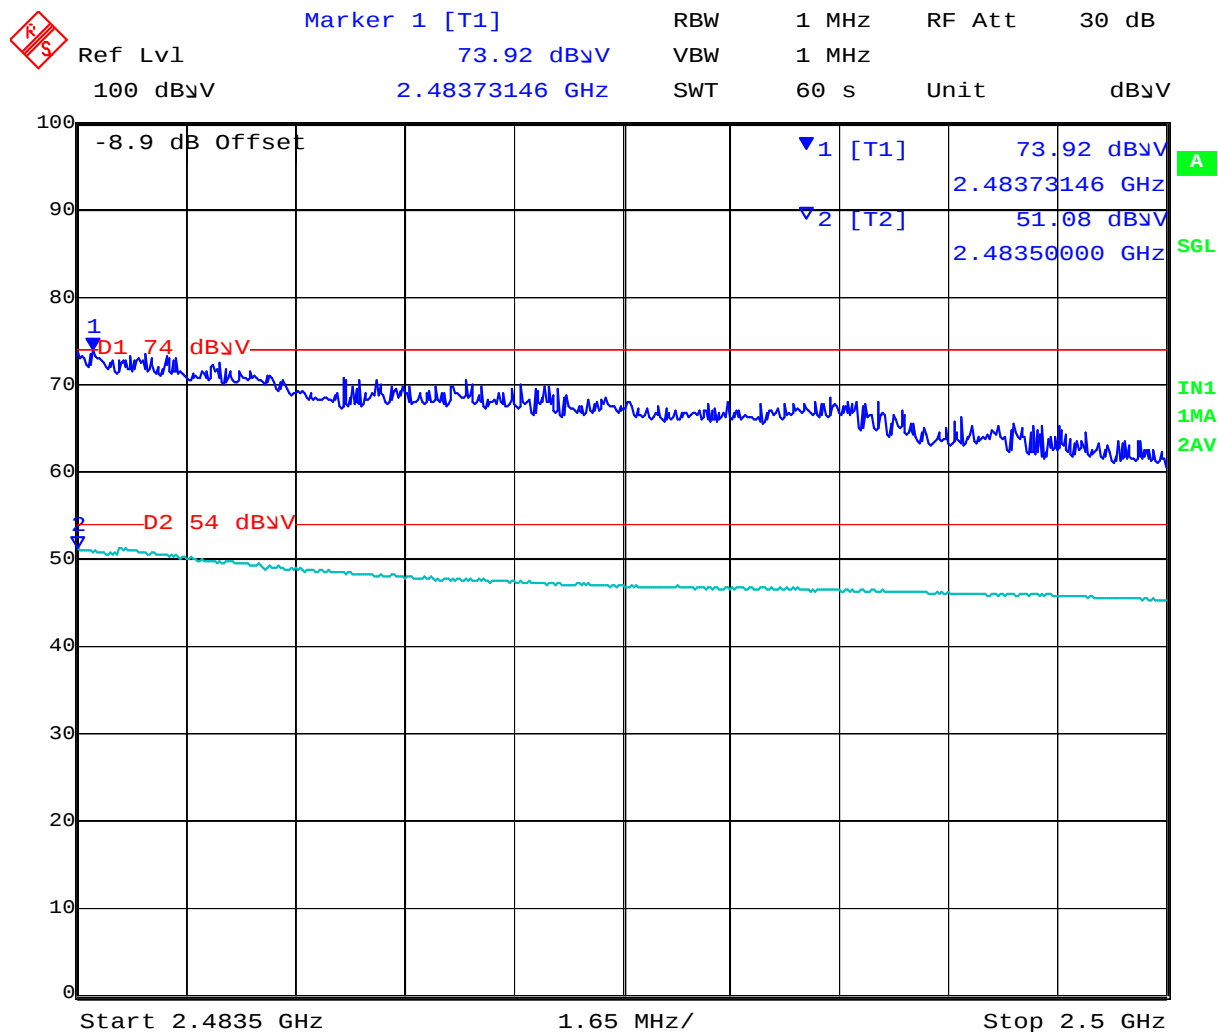


Date: 24.SEP.2010 08:10:00

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 42 of 144

ARUB61 Band Edge 2412 MHz; 802.11n HT-20 2200-2390 MHz ART=15

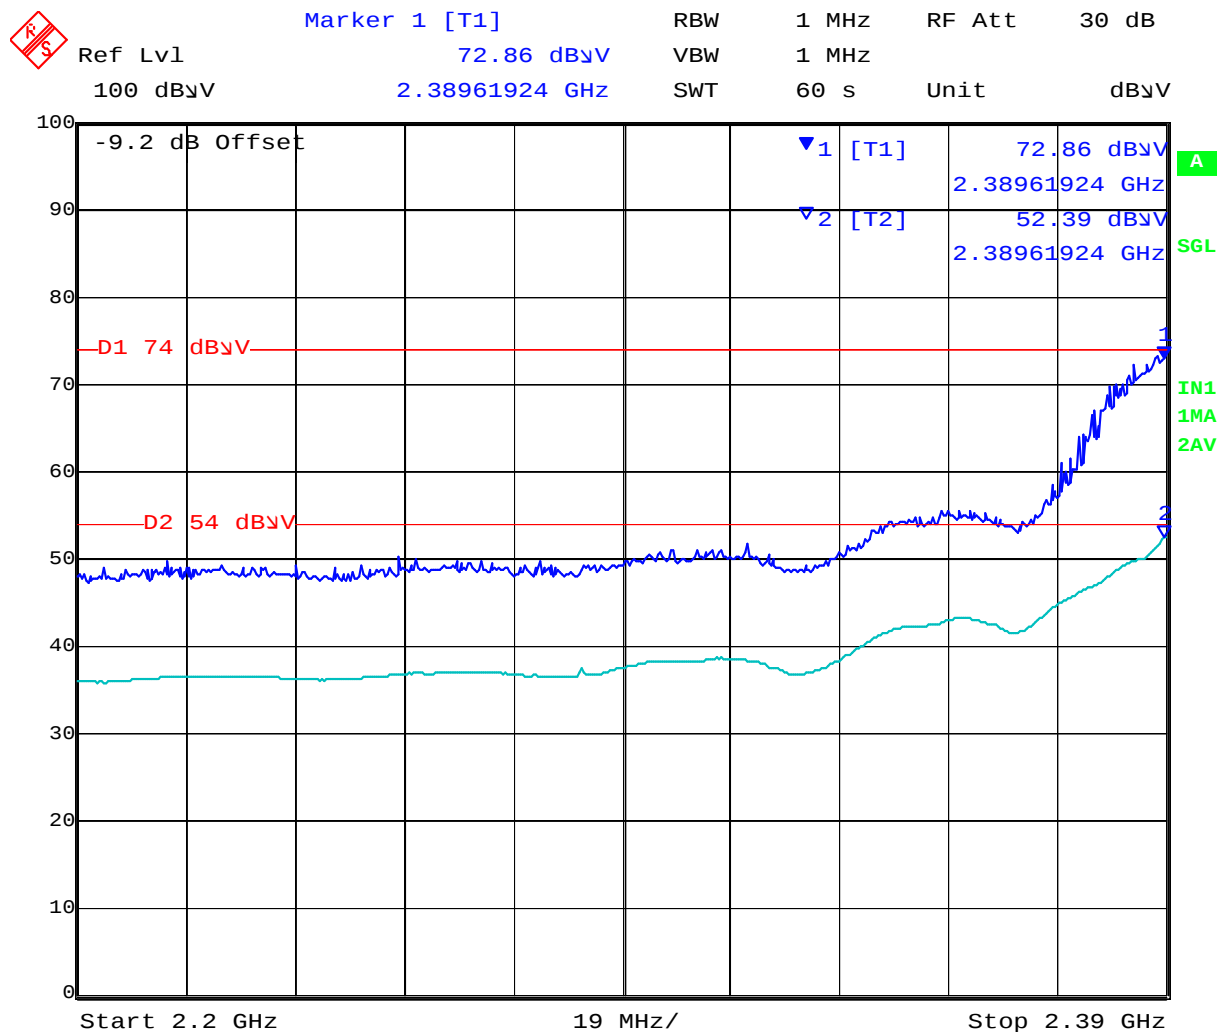


Date: 24.SEP.2010 07:39:42

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 43 of 144

ARUB61 Band Edge 2462 MHz; 802.11n HT-20 2483.5-2500 MHz ART=14.5

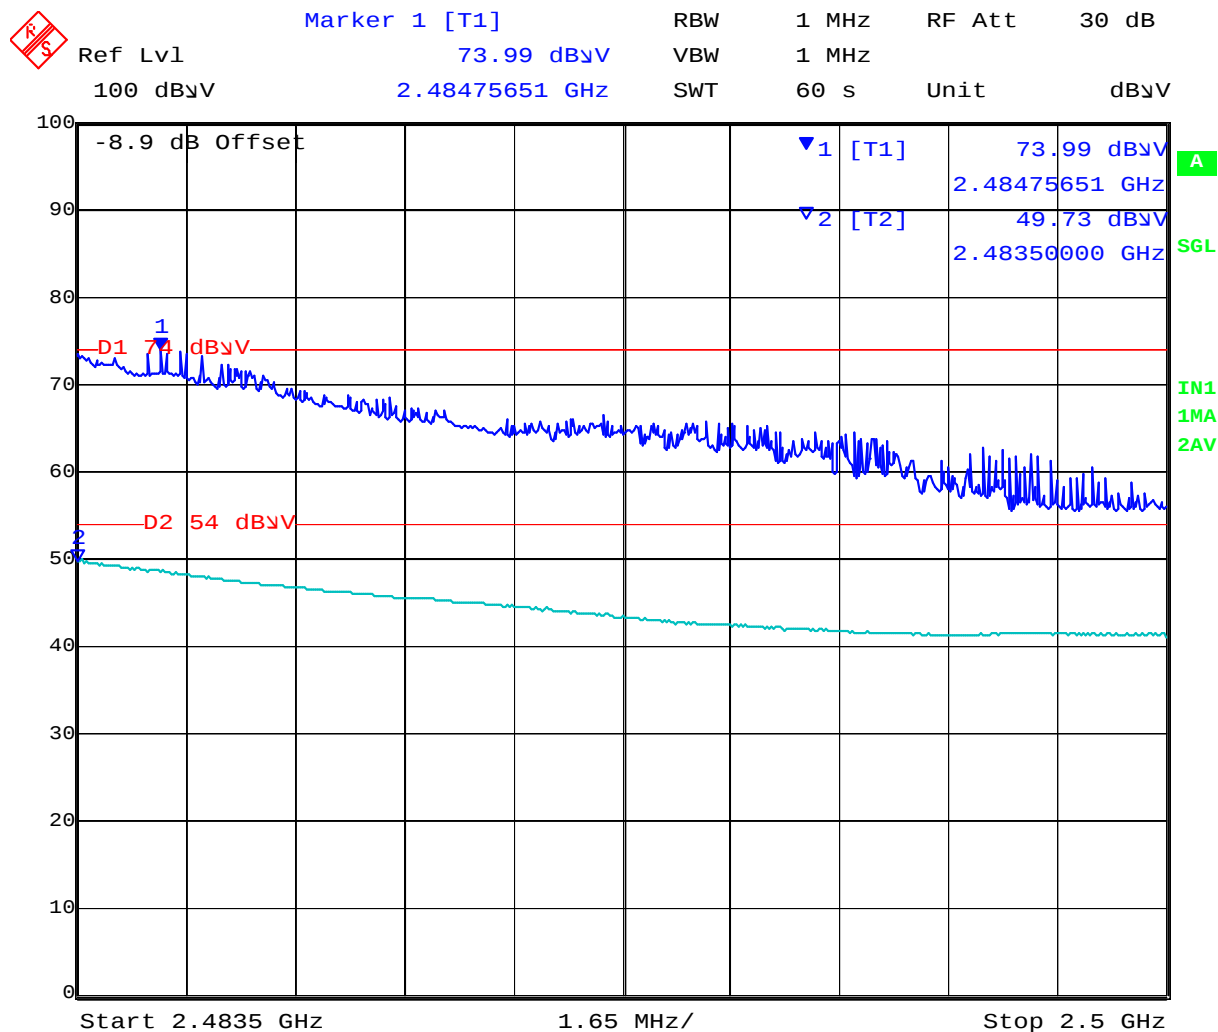


Date: 24.SEP.2010 08:15:53

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 44 of 144

ARUB61 Band Edge 2422 MHz; 802.11n HT-40 2200-2390 MHz ART=11

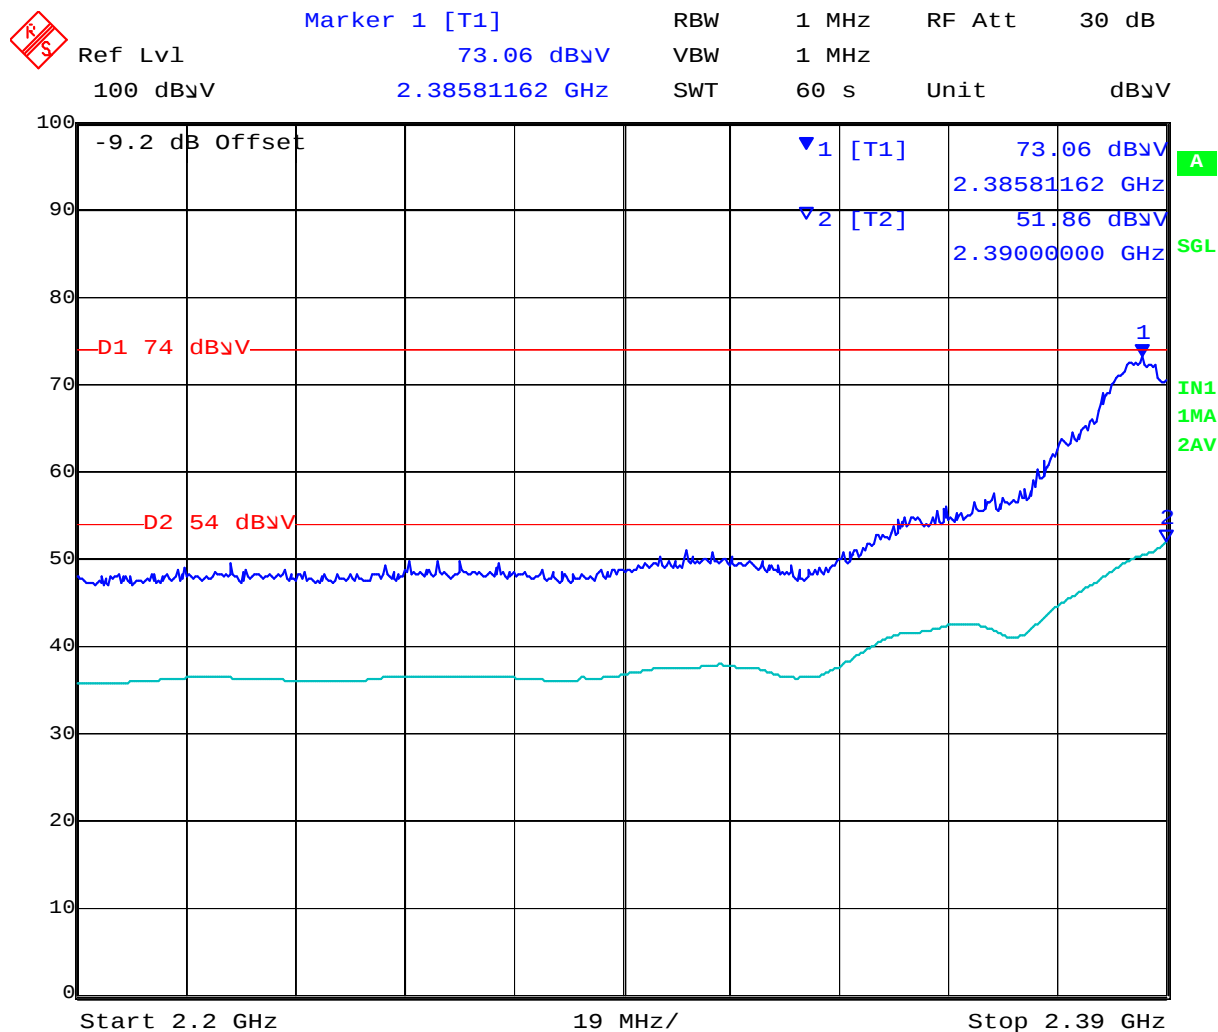


Date: 24.SEP.2010 07:55:30

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 45 of 144

ARUB61 Band Edge 2452 MHz; 802.11n HT-40 2483.5-2500 MHz ART=12

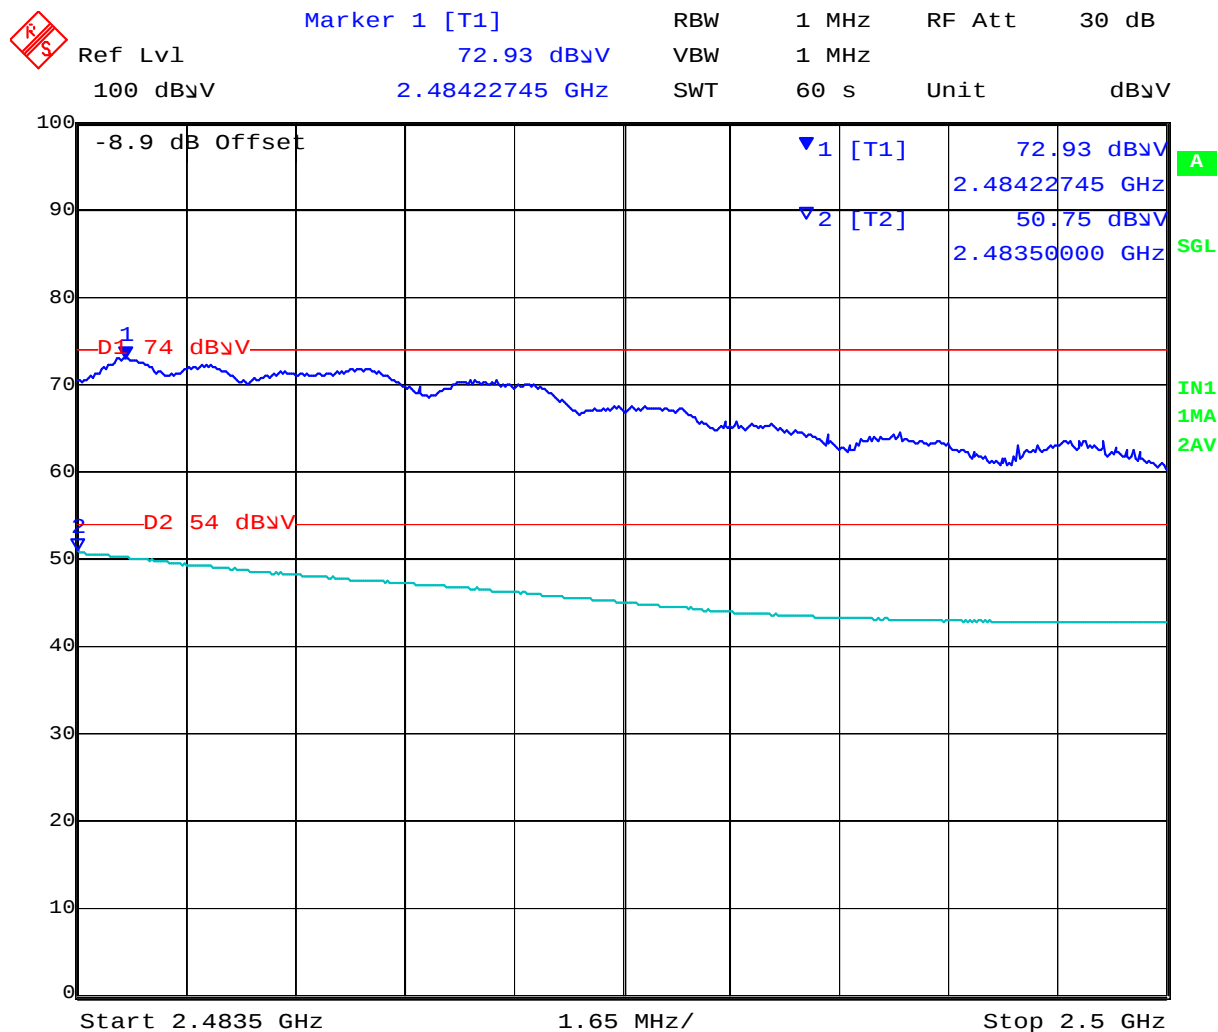

Date: 24.SEP.2010 08:29:13


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 46 of 144

7.3.3 AP-ANT-80D 2.4GHz - Transmitter Peak Emissions

Test Freq.	2412 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	27
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	31
Power Setting	18.5	Press. (mBars)	996
Antenna	AP-ANT-80D	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

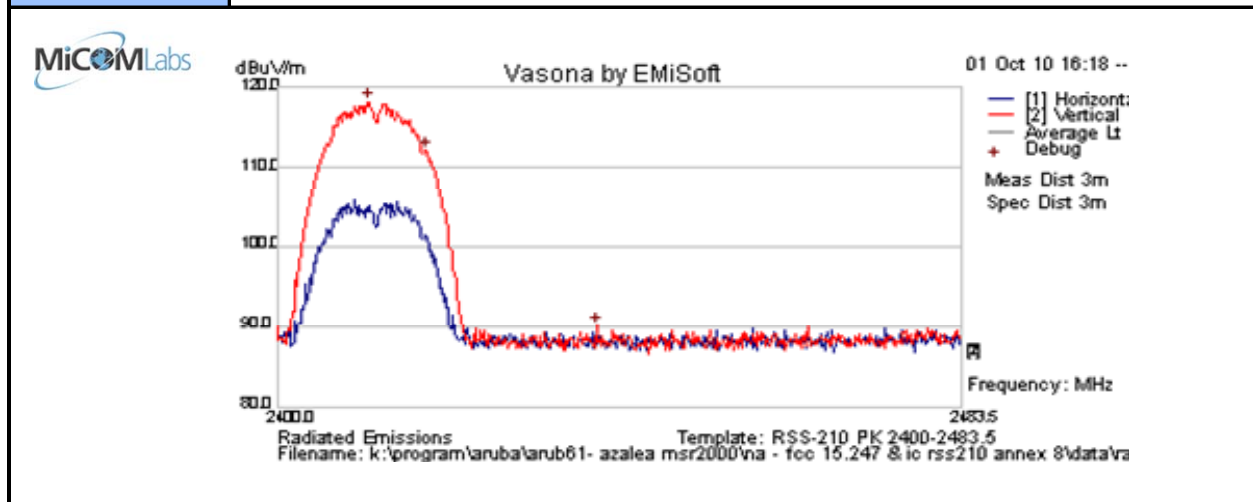

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2411.044	73.1	13.0	32.2	118.2	Peak [Scan]	V						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 47 of 144

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	27
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	31
Power Setting	20	Press. (mBars)	996
Antenna	AP-ANT-80D	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

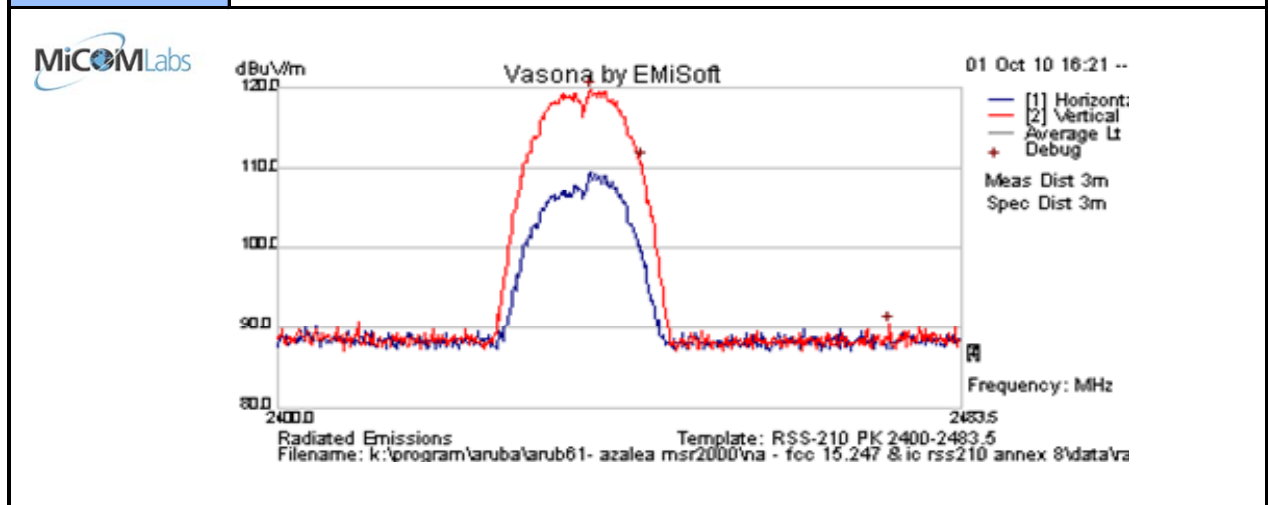

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2437.985	74.6	13.0	32.2	119.8	Peak [Scan]	V						pk
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 48 of 144

Test Freq.	2462 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	27
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	31
Power Setting	19.5	Press. (mBars)	996
Antenna	AP-ANT-80D	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

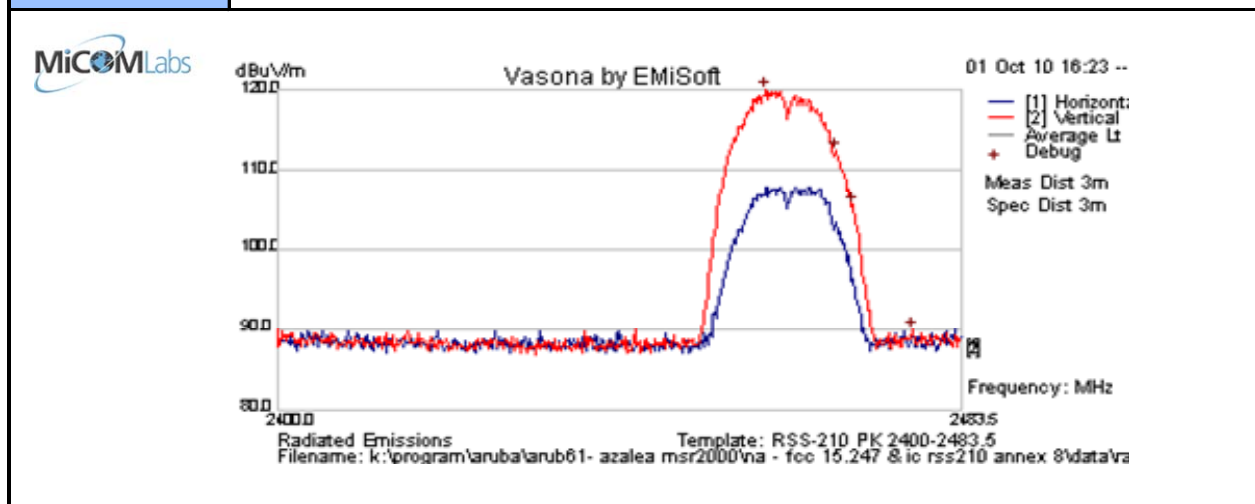

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2459.404	74.8	13.0	32.3	120.0	Peak [Scan]	V						pk
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 49 of 144

Test Freq.	2412 MHz	Engineer	SB
Variant	802.11g; 6 Mbs	Temp (°C)	27
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	31
Power Setting	15.5	Press. (mBars)	996
Antenna	AP-ANT-80D	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

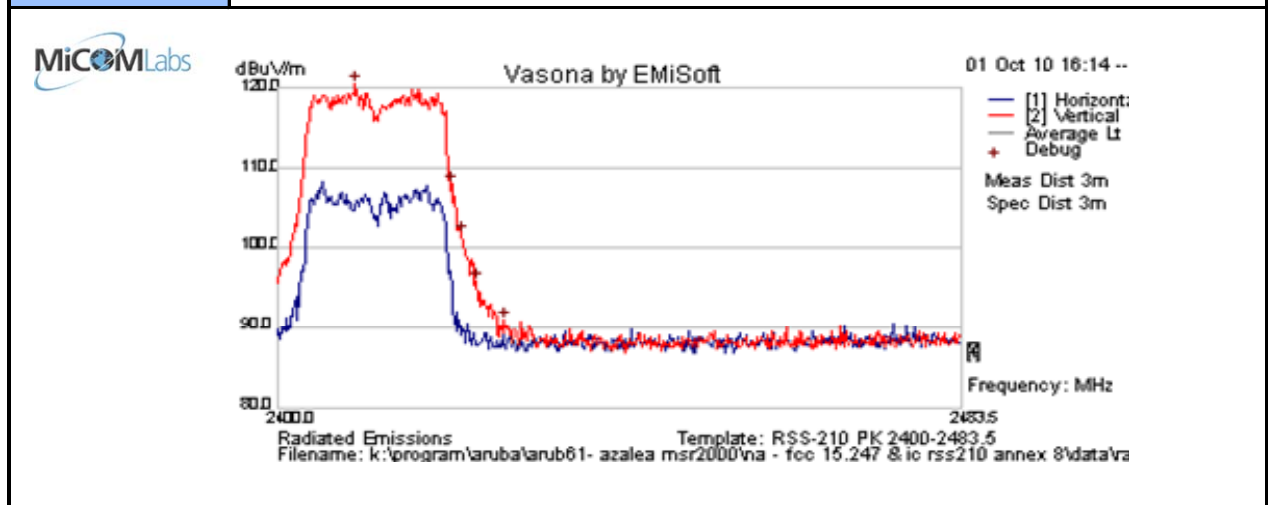

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2409.371	75.4	13.0	32.2	120.5	Peak [Scan]	V						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 50 of 144

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11g; 6 Mbs	Temp (°C)	27
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	31
Power Setting	20	Press. (mBars)	996
Antenna	AP-ANT-80D	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

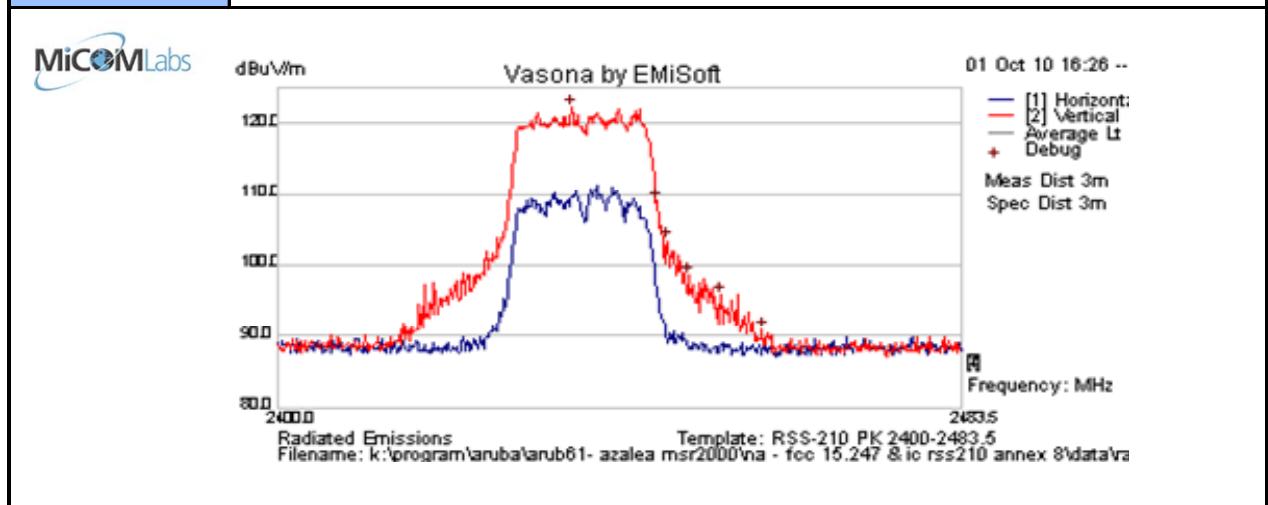

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2435.642	77.1	13.0	32.2	122.3	Peak [Scan]	V						pk
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 51 of 144

Test Freq.	2462 MHz	Engineer	SB
Variant	802.11g; 6 Mbs	Temp (°C)	27
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	31
Power Setting	15.5	Press. (mBars)	996
Antenna	AP-ANT-80D	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

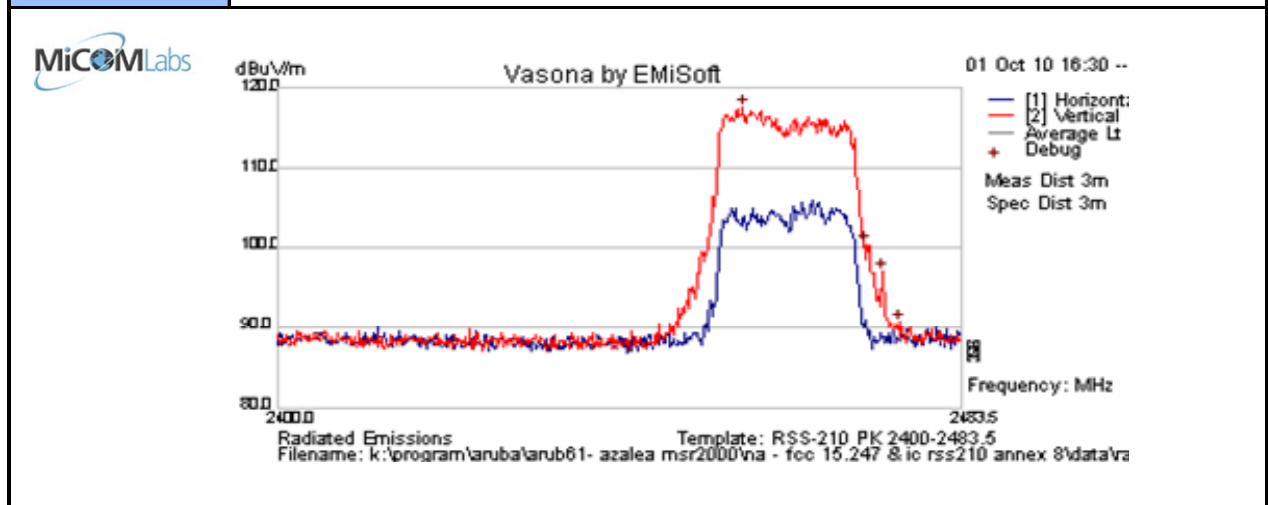

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2456.559	72.3	13.0	32.3	117.6	Peak [Scan]	V						pk
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 52 of 144

Test Freq.	2412 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	27
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	31
Power Setting	15	Press. (mBars)	996
Antenna	AP-ANT-80D	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

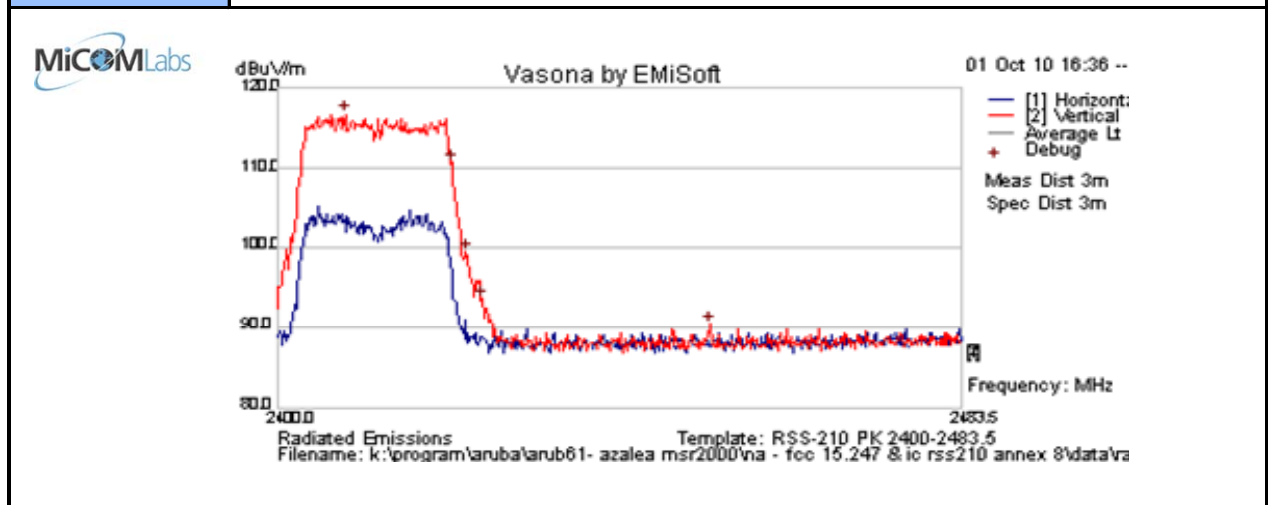

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2408.199	71.6	13.0	32.2	116.7	Peak [Scan]	V						pk
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 53 of 144

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	27
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	31
Power Setting	20	Press. (mBars)	996
Antenna	AP-ANT-80D	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

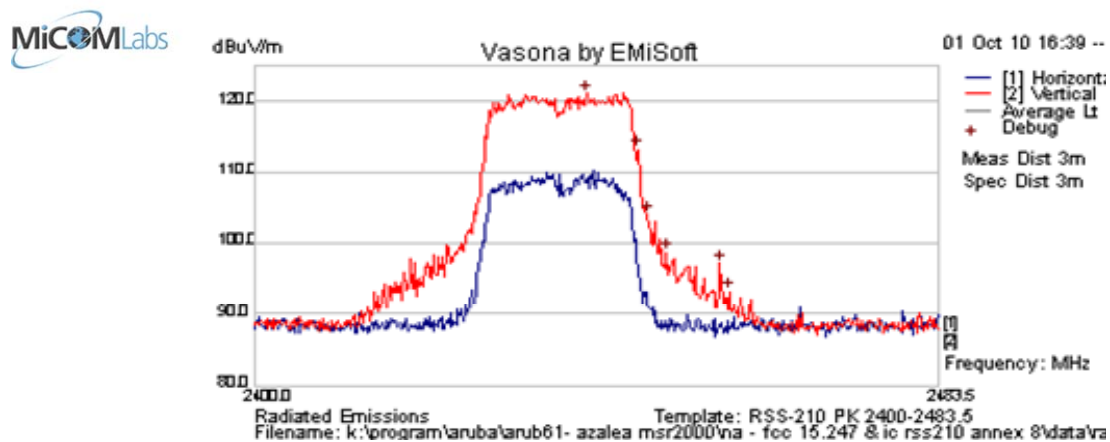

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2440.328	76.0	13.0	32.2	121.2	Peak [Scan]	V						pk
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 54 of 144

Test Freq.	2462 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	27
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	31
Power Setting	14.5	Press. (mBars)	996
Antenna	AP-ANT-80D	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

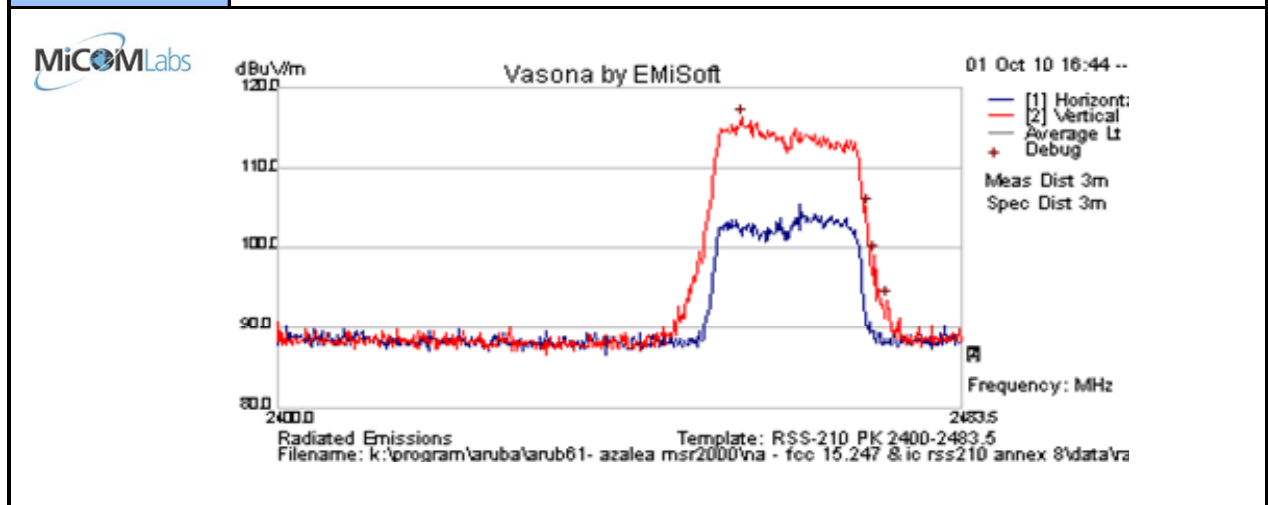

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2456.392	71.1	13.0	32.3	116.3	Peak [Scan]	V						pk
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 55 of 144

Test Freq.	2422 MHz	Engineer	SB
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	27
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	31
Power Setting	11	Press. (mBars)	996
Antenna	AP-ANT-80D	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

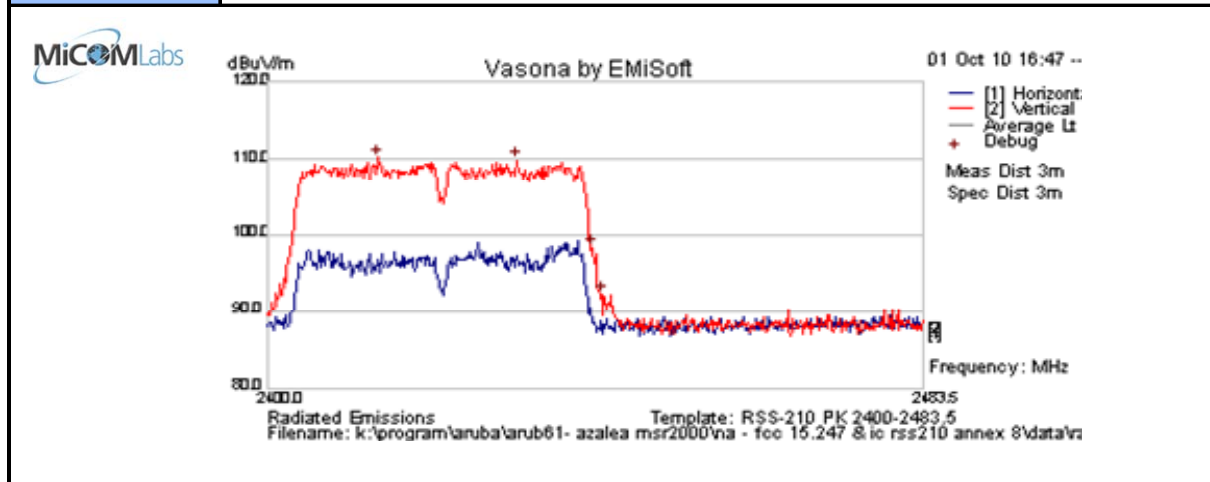

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2413.889	65.1	13.0	32.2	110.3	Peak [Scan]	V						pk
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 56 of 144

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	27
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	31
Power Setting	20	Press. (mBars)	996
Antenna	AP-ANT-80D	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

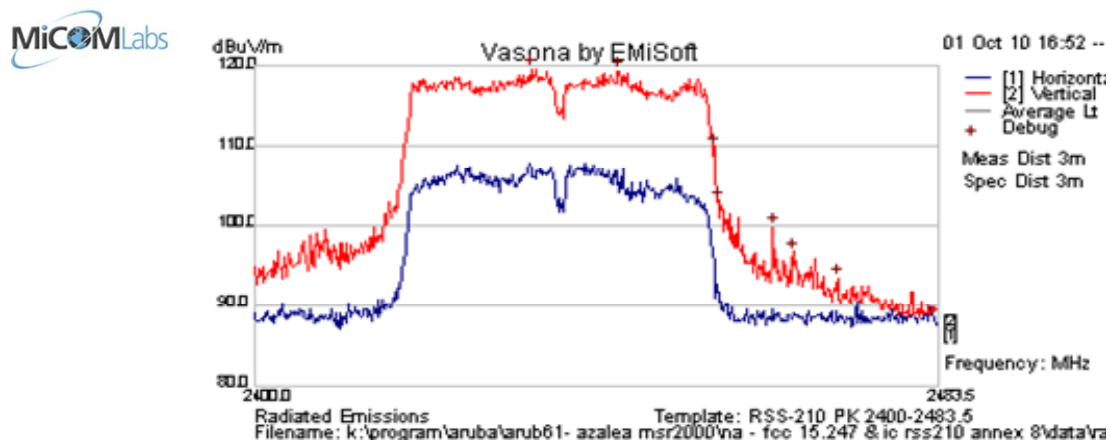

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2433.467	74.4	13.0	32.2	119.6	Peak [Scan]	V						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 57 of 144

Test Freq.	2452 MHz	Engineer	SB
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	27
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	31
Power Setting	12	Press. (mBars)	996
Antenna	AP-ANT-80D	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

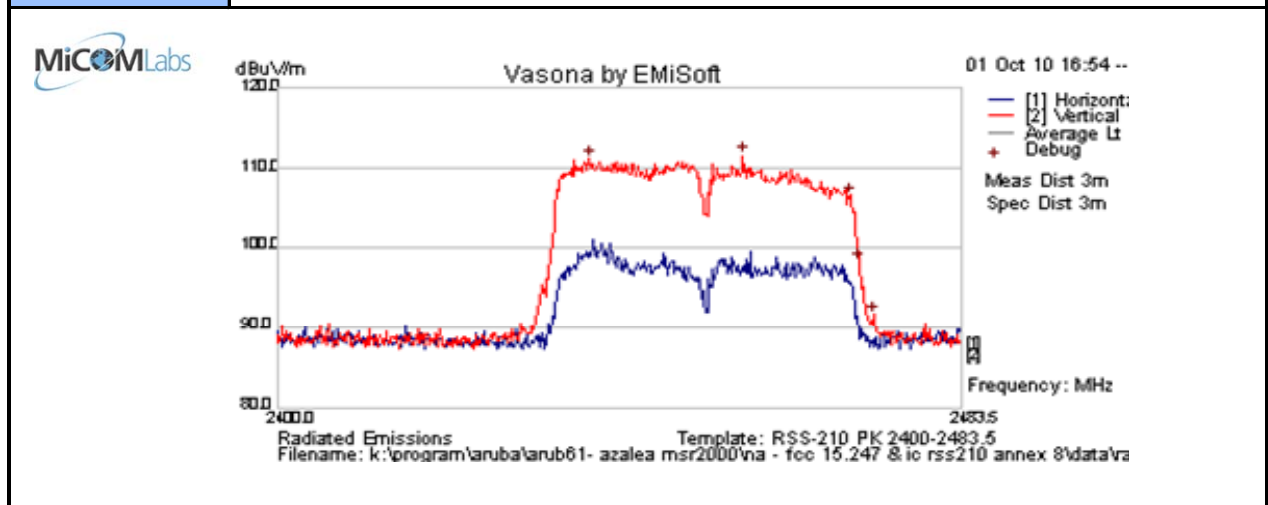

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2456.559	66.4	13.0	32.3	111.6	Peak [Scan]	V						Pk
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 58 of 144

7.3.4 AP-ANT-80D 2.4GHz - Receiver Emissions

Test Freq.	2437 MHz	Engineer	SB
Variant	Receive in Test Utility	Temp (°C)	29
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	30
Power Setting	Not Applicable in Receive Mode	Press. (mBars)	998
Antenna	AP-ANT-80		
Test Notes 1			
Test Notes 2			

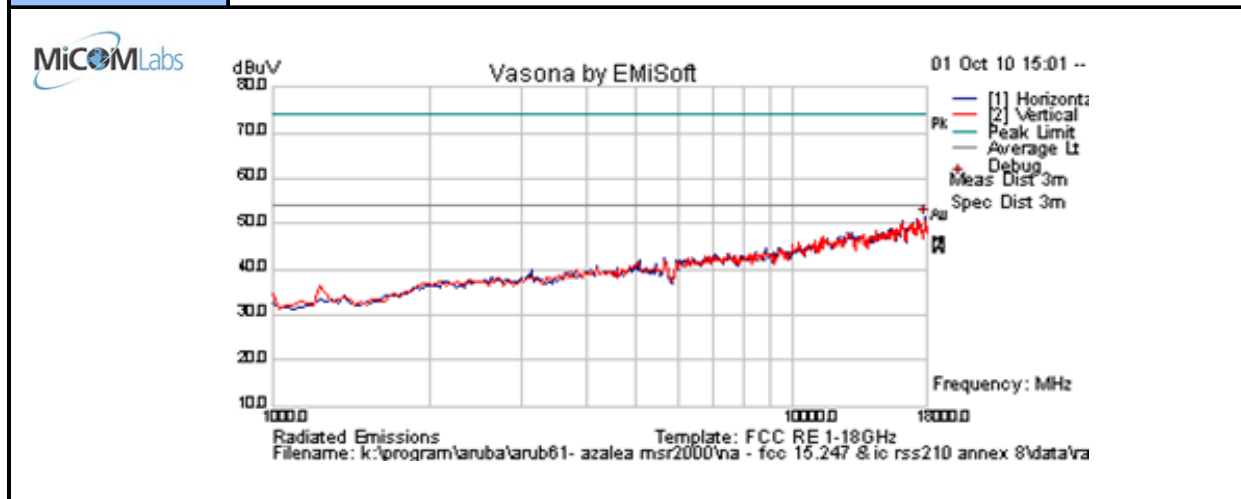

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
No Receiver Emissions within 6dB of limit.												
Legend: TRANS = Transient Emission; RB = Restricted Band; NRB = Non-Restricted Band; BE = Emission in Restricted Band Nearest Transmission Band Edge; FUND = Fundamental Freq.												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 59 of 144

7.3.5 AP-ANT-85 2.4GHz - Transmitter Radiated Spurious Emissions – Above 1 GHz

Test Freq.	2412 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	26
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	17.5	Press. (mBars)	1000
Antenna	AP-ANT-85	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band stop filter		
Test Notes 2			

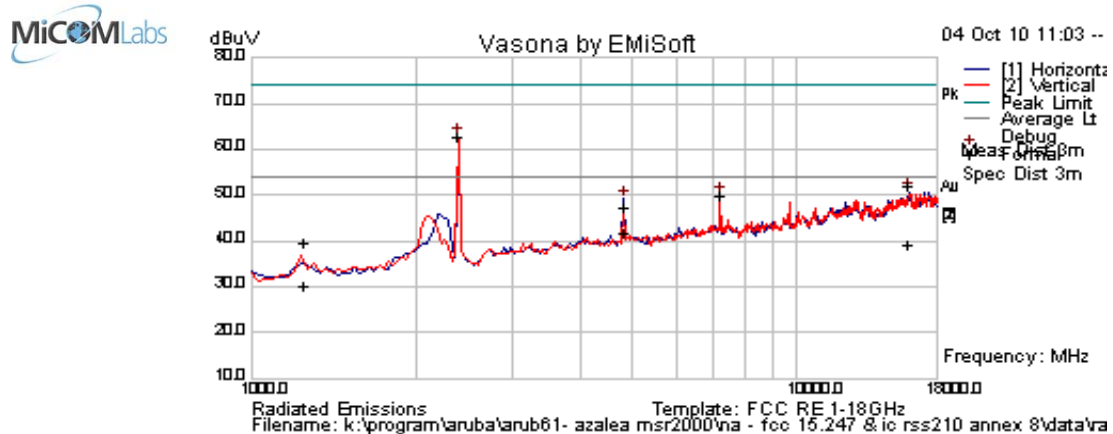

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
15957.515	42.7	9.0	0.4	52.0	Peak Max	V	110	0	74.0	-22.0	Pass	RB
4823.998	52.4	4.5	-9.4	47.4	Peak Max	V	144	26	74.0	-26.6	Pass	RB
1249.978	51.7	2.2	-14.1	39.8	Peak Max	V	98	198	74	-34.2	Pass	RB
15957.515	29.8	9.0	0.4	39.2	Average Max	V	110	0	54	-14.8	Pass	RB
4823.998	46.9	4.5	-9.4	42.0	Average Max	V	144	26	54	-12.0	Pass	RB
1249.978	42.3	2.2	-14.1	30.4	Average Max	V	98	198	54	-23.6	Pass	RB
2396.794	70.9	3.0	-11.2	62.7	Peak [Scan]	V	--	--	--	--	n/a	FUND
7234.469	49.7	5.4	-5.2	49.9	Peak [Scan]	H	> 20 dB below FUND				Pass	NRB
Legend:		TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission										
		RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak										

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 60 of 144

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	26
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	21	Press. (mBars)	1000
Antenna	AP-ANT-85	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band stop filter		
Test Notes 2			

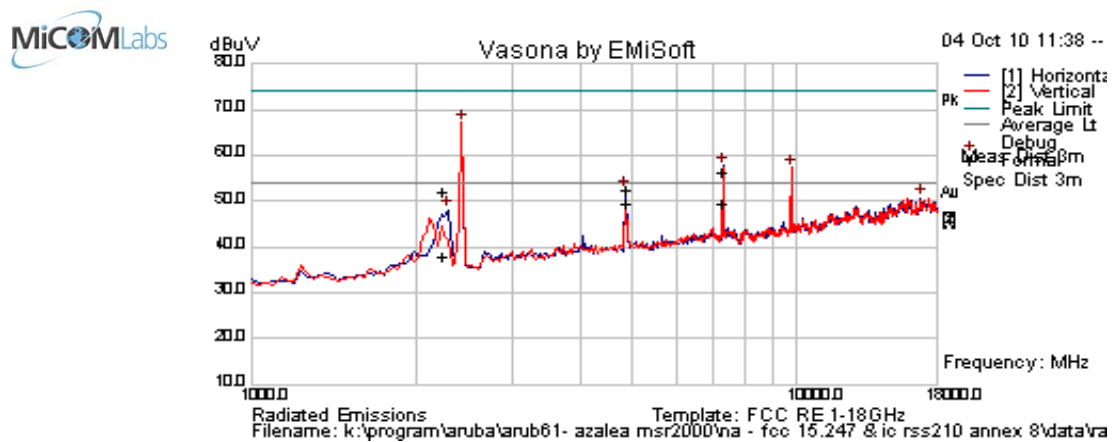

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
7306.613	55.6	5.4	-4.9	56.2	Peak Max	H	98	1	74.0	-17.8	Pass	RB
4873.998	57.1	4.5	-9.3	52.3	Peak Max	H	98	341	74.0	-21.7	Pass	RB
2246.333	60.8	2.9	-11.4	52.3	Peak Max	H	114	21	74	-21.7	Pass	RB
7306.613	48.9	5.4	-4.9	49.5	Average Max	H	98	1	54	-4.6	Pass	RB
4873.998	54.3	4.5	-9.3	49.4	Average Max	H	98	341	54	-4.6	Pass	RB
2246.333	46.6	2.9	-11.4	38.1	Average Max	H	114	21	54	-15.9	Pass	RB
9755.511	54.7	6.4	-3.7	57.4	Peak [Scan]	V	> 20 dB below FUND				Pass	NRB
2430.862	75.4	3.0	-11.1	67.3	Peak [Scan]	H	--	--	--	--	n/a	FUND
16841.683	40.4	8.6	1.8	50.8	Peak [Scan]	H	> 20 dB below FUND				Pass	NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 61 of 144

Test Freq.	2462 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	26
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	17.5	Press. (mBars)	1000
Antenna	AP-ANT-85	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band stop filter		
Test Notes 2			

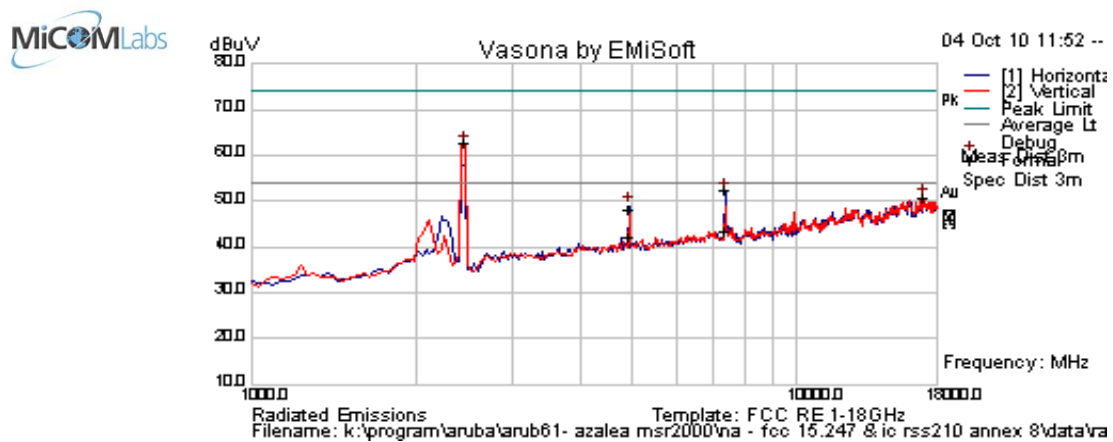

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
7382.525	51.7	5.5	-4.8	52.3	Peak Max	H	98	63	74.0	-21.7	Pass	RB
4923.958	52.8	4.6	-9.1	48.2	Peak Max	H	188	341	74.0	-25.8	Pass	RB
7382.525	42.9	5.5	-4.8	43.5	Average Max	H	98	63	54	-10.5	Pass	RB
4923.958	46.8	4.6	-9.1	42.2	Average Max	H	188	341	54	-11.8	Pass	RB
2464.930	70.7	3.0	-11.1	62.6	Peak [Scan]	V	--	--	--	--	n/a	FUND
17114.228	41.4	8.5	0.8	50.7	Peak [Scan]	V	> 20 dB below FUND				Pass	NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 62 of 144

Test Freq.	2412 MHz	Engineer	SB
Variant	802.11g; 6 Mbs	Temp (°C)	26
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	13.5	Press. (mBars)	1000
Antenna	AP-ANT-85	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band stop filter		
Test Notes 2			

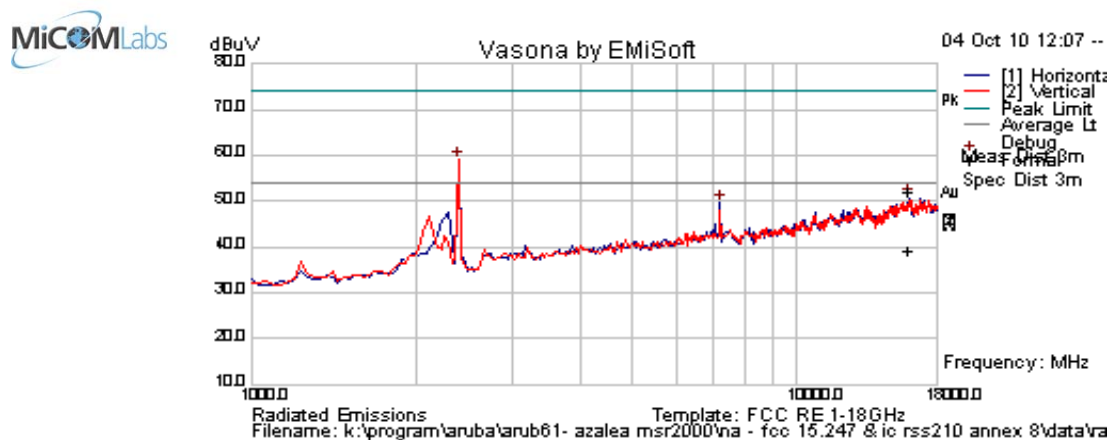

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
16025.060	42.7	9.0	0.5	52.1	Peak Max	H	174	210	74.0	-21.9	Pass	RB
16025.06	29.7	9.0	0.5	39.2	Average Max	H	174	210	54.0	-14.8	Pass	RB
2396.794	67.2	3.0	-11.2	59.0	Peak [Scan]	V	--	--	--	--	n/a	FUND
7234.469	49.5	5.4	-5.2	49.7	Peak [Scan]	H	> 20 dB below FUND				Pass	NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 63 of 144

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11g; 6 Mbs	Temp (°C)	26
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	22	Press. (mBars)	1000
Antenna	AP-ANT-85	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band stop filter		
Test Notes 2			

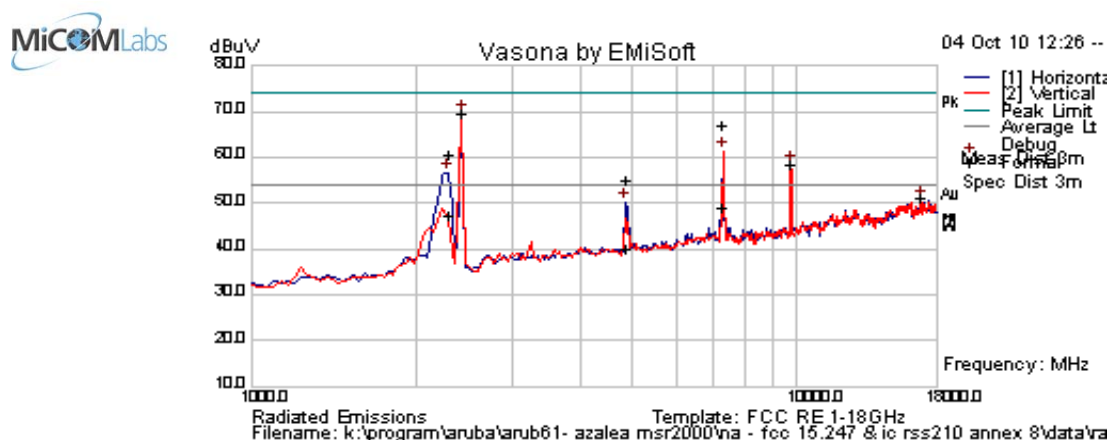

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
7305.892	66.4	5.4	-4.9	66.9	Peak Max	V	129	18	74.0	-7.1	Pass	RB
2307.255	68.8	2.9	-11.1	60.6	Peak Max	H	106	0	74.0	-13.4	Pass	RB
4869.098	59.7	4.5	-9.3	54.9	Peak Max	H	98	340	74	-19.2	Pass	RB
7305.892	48.5	5.4	-4.9	49.1	Average Max	V	129	18	54	-4.9	Pass	RB
2307.255	55.6	2.9	-11.1	47.4	Average Max	H	106	0	54	-6.6	Pass	RB
4869.098	44.9	4.5	-9.3	40.1	Average Max	H	98	340	54	-13.9	Pass	RB
16841.683	40.7	8.6	1.8	51.0	Peak [Scan]	V	> 20 dB below FUND				Pass	NRB
9721.443	55.4	6.3	-3.3	58.4	Peak [Scan]	V	> 20 dB below FUND				Pass	NRB
2430.862	77.6	3.0	-11.1	69.5	Peak [Scan]	H	--	--	--	--	n/a	FUND


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 64 of 144

Test Freq.	2462 MHz	Engineer	SB
Variant	802.11g; 6 Mbs	Temp (°C)	26
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	13.5	Press. (mBars)	1000
Antenna	AP-ANT-85	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band stop filter		
Test Notes 2			

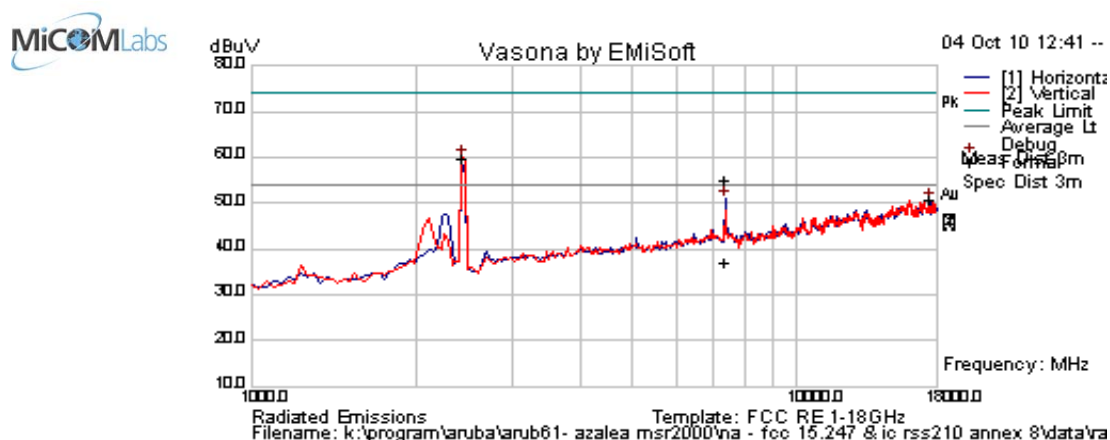

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
7383.888	54.3	5.5	-4.8	54.9	Peak Max	H	98	54	74.0	-19.1	Pass	RB
7383.888	36.2	5.5	-4.8	36.9	Average Max	H	98	54	54.0	-17.1	Pass	RB
2430.862	68.0	3.0	-11.1	59.9	Peak [Scan]	V	--	--	--	--	n/a	FUND
17454.910	39.8	8.7	2.0	50.6	Peak [Scan]	H	> 20 dB below FUND				Pass	NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 65 of 144

Test Freq.	2412 MHz	Engineer	SB
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	26
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	14	Press. (mBars)	1000
Antenna	AP-ANT-85	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band stop filter		
Test Notes 2			

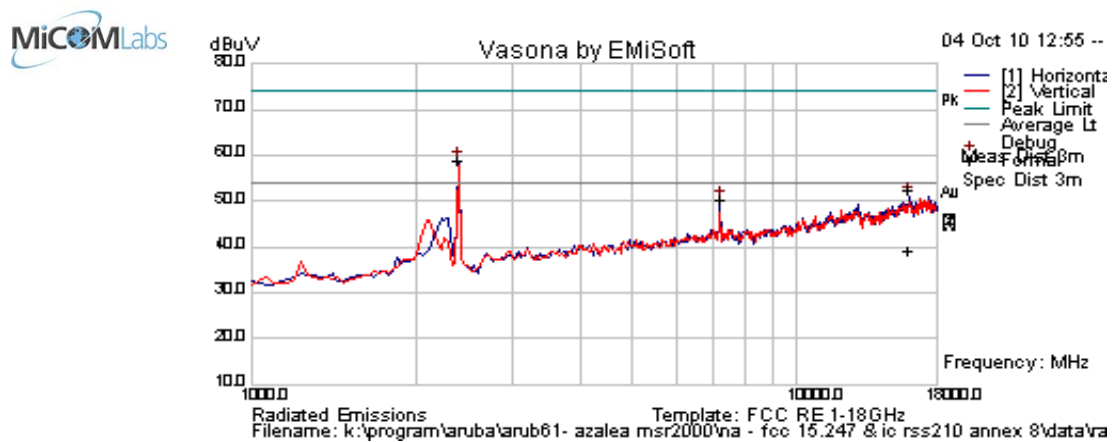

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
16023.918	42.9	9.0	0.5	52.4	Peak Max	H	184	336	74.0	-21.6	Pass	RB
16023.918	29.8	9.0	0.5	39.2	Average Max	H	184	336	54.0	-14.8	Pass	RB
2396.794	67.1	3.0	-11.2	58.9	Peak [Scan]	H	--	--	--	--	n/a	FUND
7234.469	50.2	5.4	-5.2	50.4	Peak [Scan]	H	> 20 dB below FUND				Pass	NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 66 of 144

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	26
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	20	Press. (mBars)	1000
Antenna	AP-ANT-85	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band stop filter		
Test Notes 2			

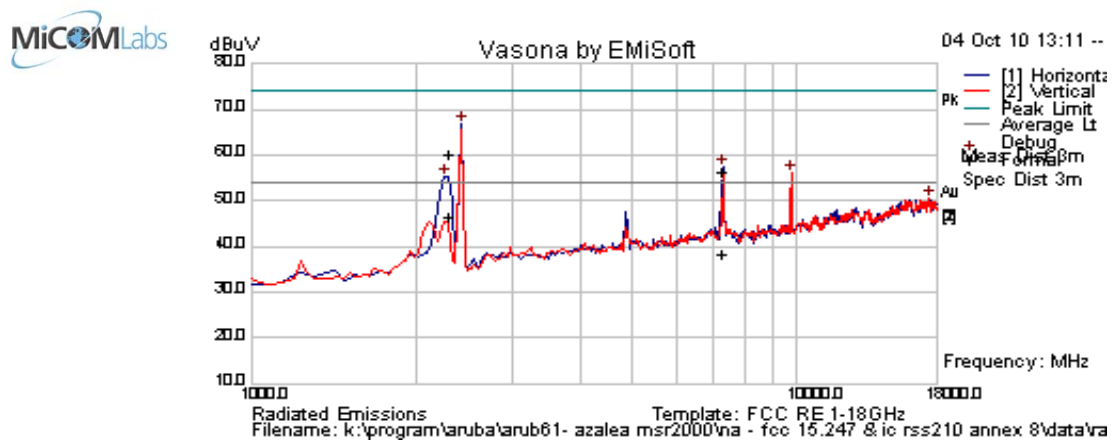

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
7303.407	55.6	5.4	-4.9	56.1	Peak Max	H	154	42	74.0	-17.9	Pass	RB
2307.655	68.3	2.9	-11.1	60.1	Peak Max	H	106	12	74.0	-14.0	Pass	RB
7303.407	37.9	5.4	-4.9	38.4	Average Max	H	154	42	54	-15.6	Pass	RB
2307.655	54.9	2.9	-11.1	46.7	Average Max	H	106	12	54	-7.3	Pass	RB
2430.862	74.9	3.0	-11.1	66.8	Peak [Scan]	H	--	--	--	--	n/a	FUND
9755.511	53.4	6.4	-3.7	56.1	Peak [Scan]	V	> 20 dB below FUND				Pass	NRB
17454.910	39.7	8.7	2.0	50.5	Peak [Scan]	V	> 20 dB below FUND				Pass	NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 67 of 144

Test Freq.	2462 MHz	Engineer	SB
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	26
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	12	Press. (mBars)	1000
Antenna	AP-ANT-85	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band stop filter		
Test Notes 2			

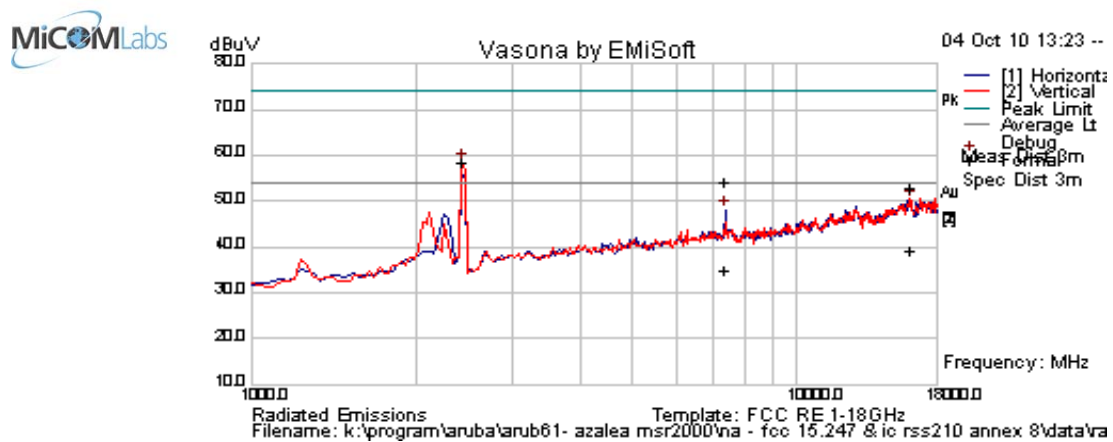

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
16089.499	43.2	9.0	0.8	52.9	Peak Max	V	171	249	74.0	-21.1	Pass	RB
7382.124	53.5	5.5	-4.8	54.1	Peak Max	H	98	335	74.0	-19.9	Pass	RB
16089.499	29.6	9.0	0.8	39.3	Average Max	V	171	249	54	-14.7	Pass	RB
7382.124	34.3	5.5	-4.8	35.0	Average Max	H	98	335	54	-19.0	Pass	RB
2430.862	66.5	3.0	-11.1	58.4	Peak [Scan]	V	--	--	--	--	n/a	FUND


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 68 of 144

Test Freq.	2422 MHz	Engineer	SB
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	26
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	9	Press. (mBars)	1000
Antenna	AP-ANT-85	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band stop filter		
Test Notes 2			

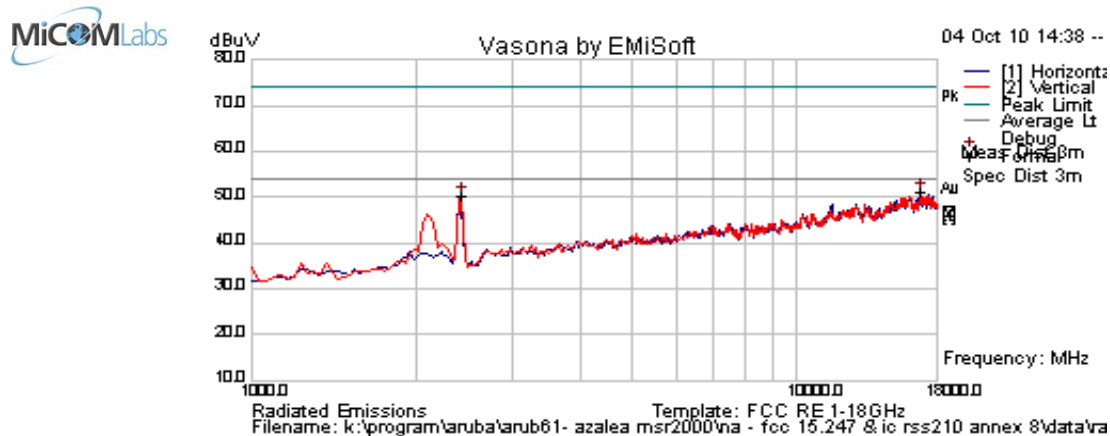

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
16841.683	40.9	8.6	1.8	51.2	Peak [Scan]	V			> 20 dB below FUND		Pass	NRB
2430.861723	58.4	3.0	-11.1	50.3	Peak [Scan]	V	--	--	--	--	n/a	FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 69 of 144

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	26
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	20	Press. (mBars)	1000
Antenna	AP-ANT-85	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band stop filter		
Test Notes 2			

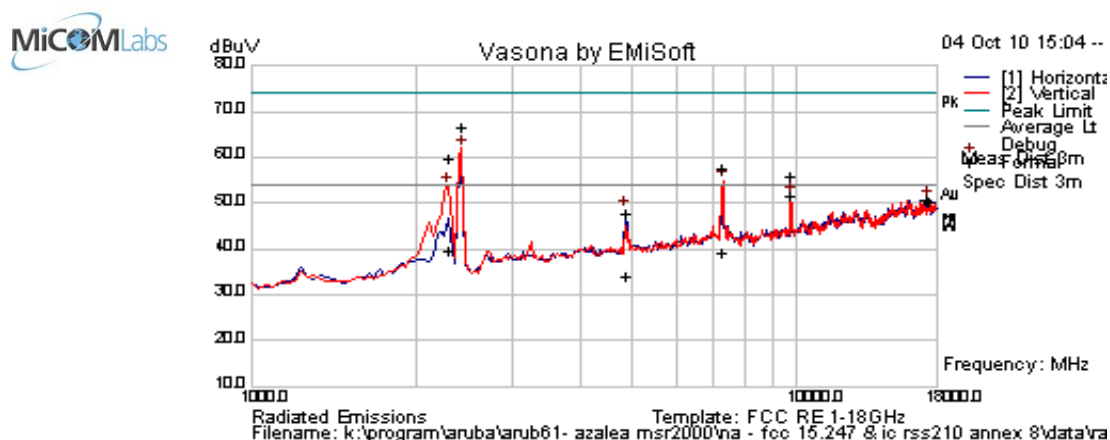

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
7303.888	56.9	5.4	-4.9	57.4	Peak Max	V	131	56	74.0	-16.6	Pass	RB
2310.701	68.0	2.9	-11.1	59.8	Peak Max	V	108	26	74.0	-14.2	Pass	RB
4871.182	52.6	4.5	-9.3	47.8	Peak Max	H	120	343	74	-26.2	Pass	RB
7303.888	38.5	5.4	-4.9	39.0	Average Max	V	131	56	54	-15.0	Pass	RB
2310.701	47.9	2.9	-11.1	39.7	Average Max	V	108	26	54	-14.3	Pass	RB
4871.182	38.7	4.5	-9.3	33.9	Average Max	H	120	343	54	-20.1	Pass	RB
2430.862	74.9	3.0	-11.1	66.8	Peak [Scan]	H	--	--	--	--	n/a	FUND
9755.511	53.4	6.4	-3.7	56.1	Peak [Scan]	V	> 20 dB below FUND				Pass	NRB
17454.910	39.7	8.7	2.0	50.5	Peak [Scan]	V	> 20 dB below FUND				Pass	NRB
9721.443	48.5	6.3	-3.3	51.6	Peak [Scan]	V	> 20 dB below FUND				Pass	NRB
17420.842	40.1	8.7	1.9	50.7	Peak [Scan]	H	> 20 dB below FUND				Pass	NRB
Legend:		TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission										
		RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak										

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 70 of 144

Test Freq.	2452 MHz	Engineer	SB
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	26
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	9	Press. (mBars)	1000
Antenna	AP-ANT-85	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band stop filter		
Test Notes 2			

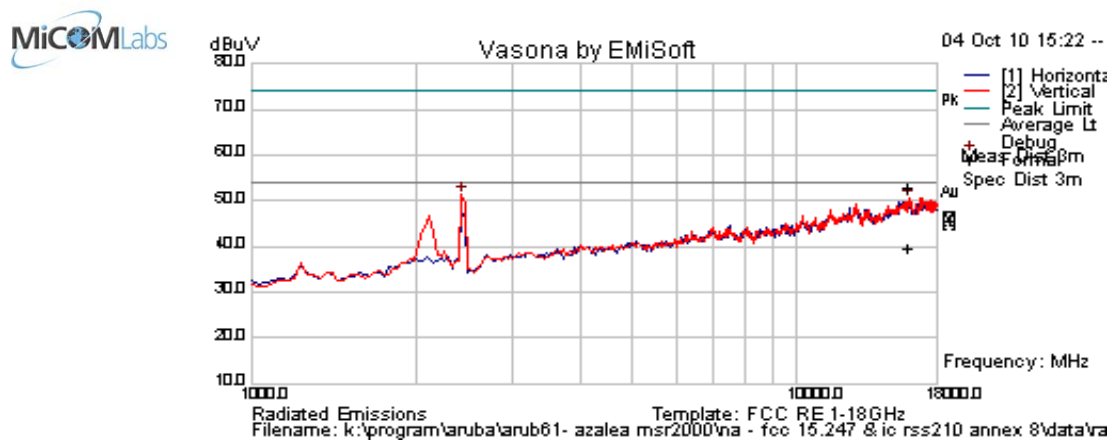

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
16060.939	43.2	9.0	0.8	53.0	Peak Max	V	192	189	74.0	-21.0	Pass	RB
16060.939	29.7	9.0	0.8	39.5	Average Max	V	192	189	54.0	-14.5	Pass	RB
2430.862	59.4	3.0	-11.1	51.3	Peak [Scan]	V	--	--	--	--	n/a	FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 71 of 144

7.3.6 AP-ANT-85 2.4GHz - Transmitter Band Edge Emissions

BE 802.11b 2412 MHz 2.2-2.39GHz

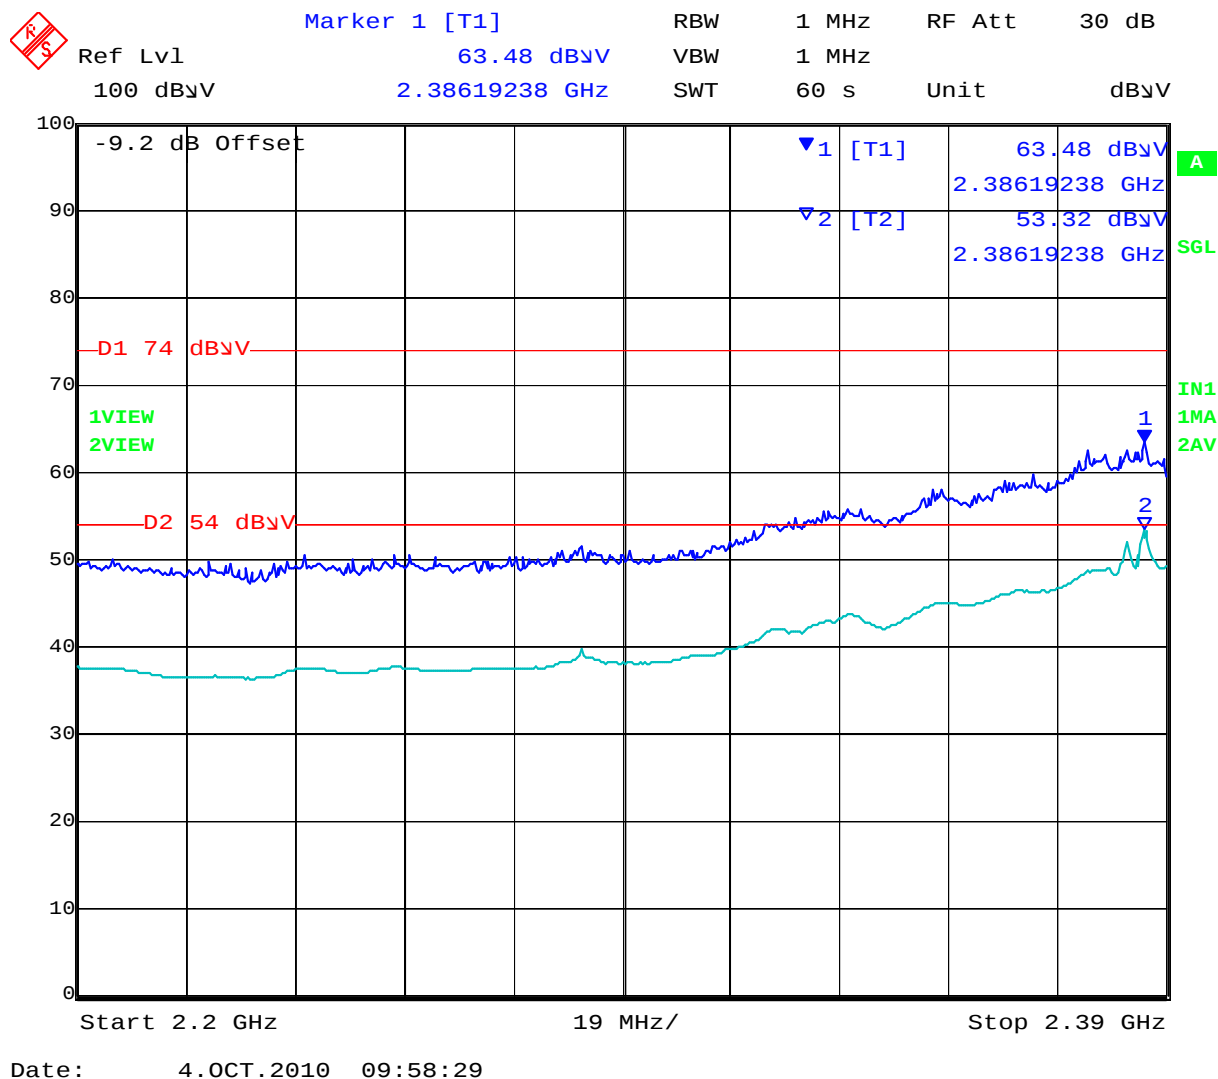


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 72 of 144

BE 802.11b 2462 MHz 2.4835-2.5GHz

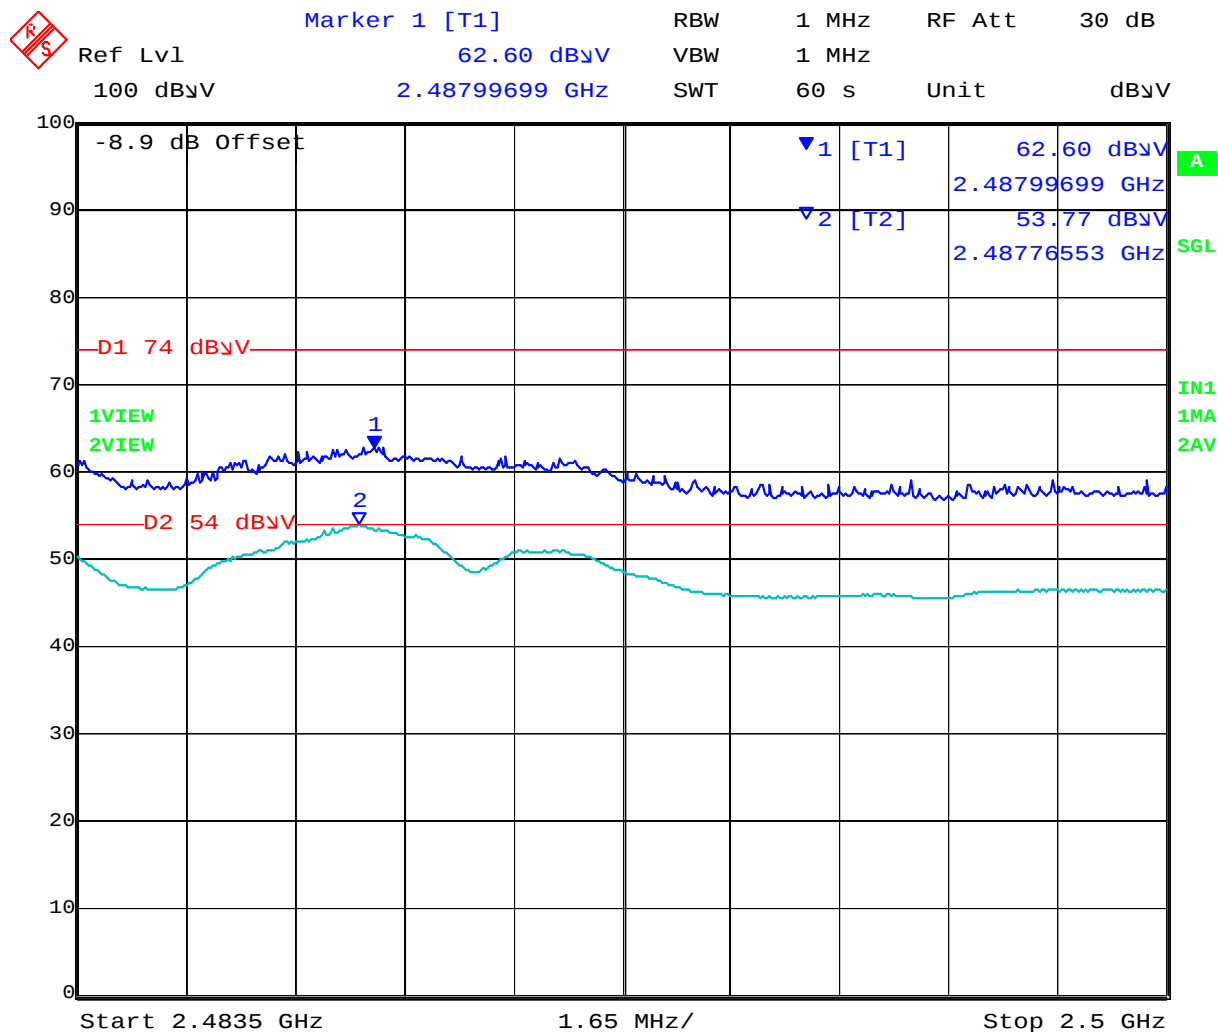


Date: 4.OCT.2010 09:49:29

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 73 of 144

BE 802.11g 2412 MHz 2.2-2.39GHz

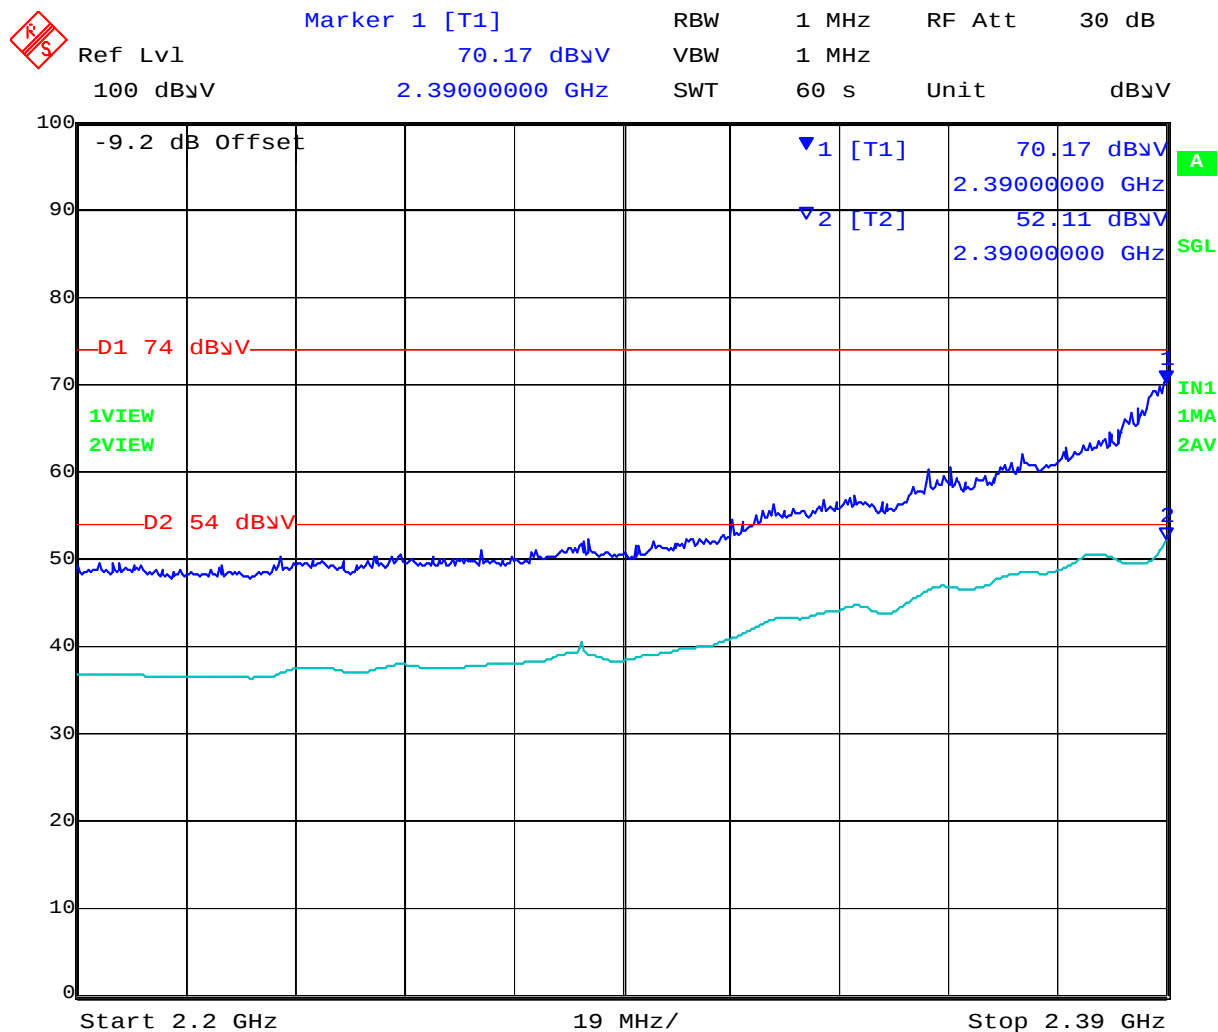


Date: 4.OCT.2010 09:33:41

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 74 of 144

BE 802.11g 2462 MHz 2.4835-2.5GHz

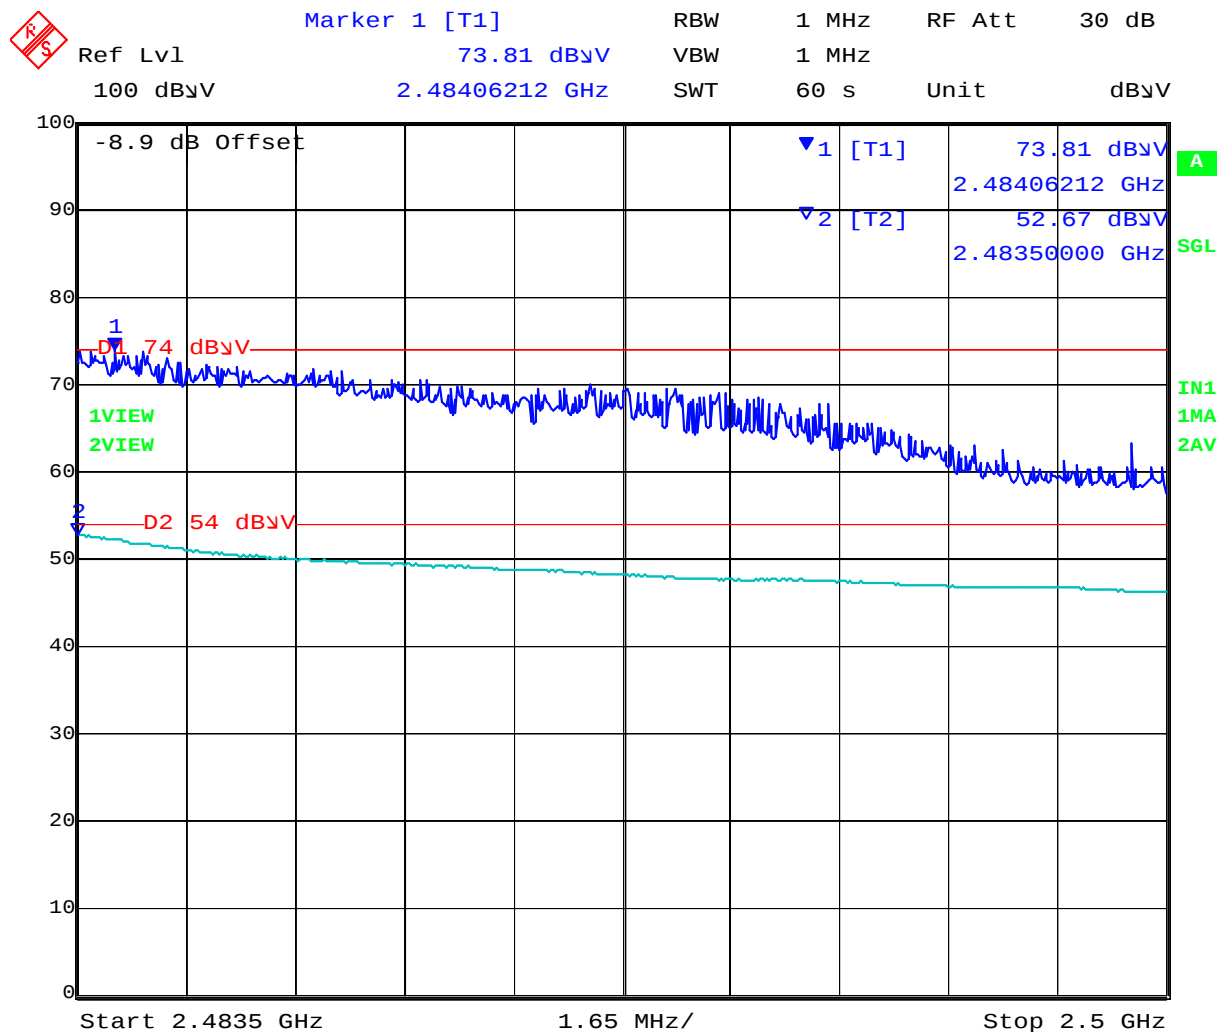


Date: 4.OCT.2010 09:42:02

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 75 of 144

BE 802.11n HT20 2412 MHz 2.2-2.39GHz

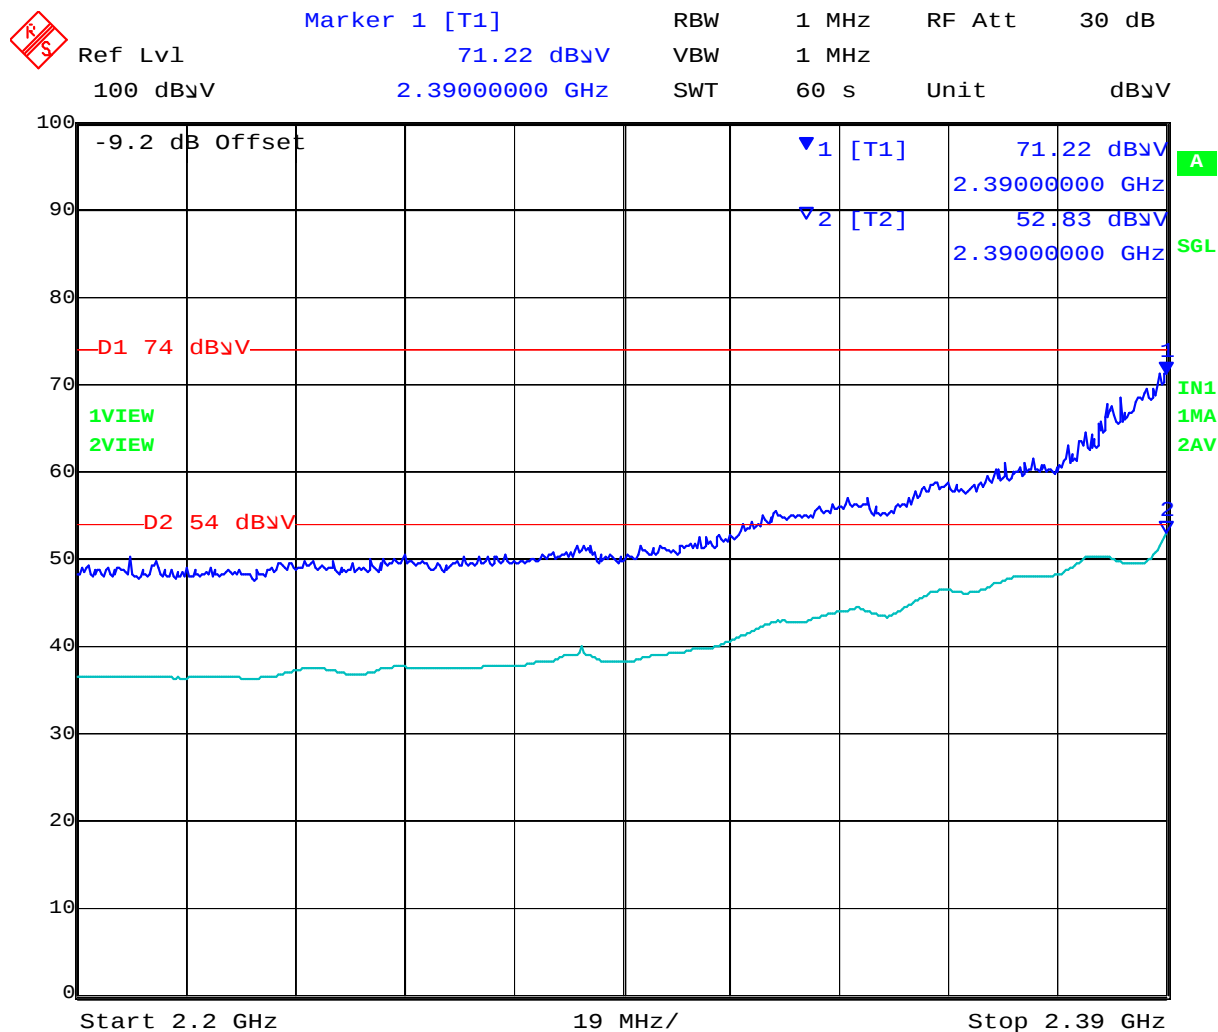


Date: 4.OCT.2010 10:17:23

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 76 of 144

BE 802.11n HT20 2462 MHz 2.4835-2.5GHz

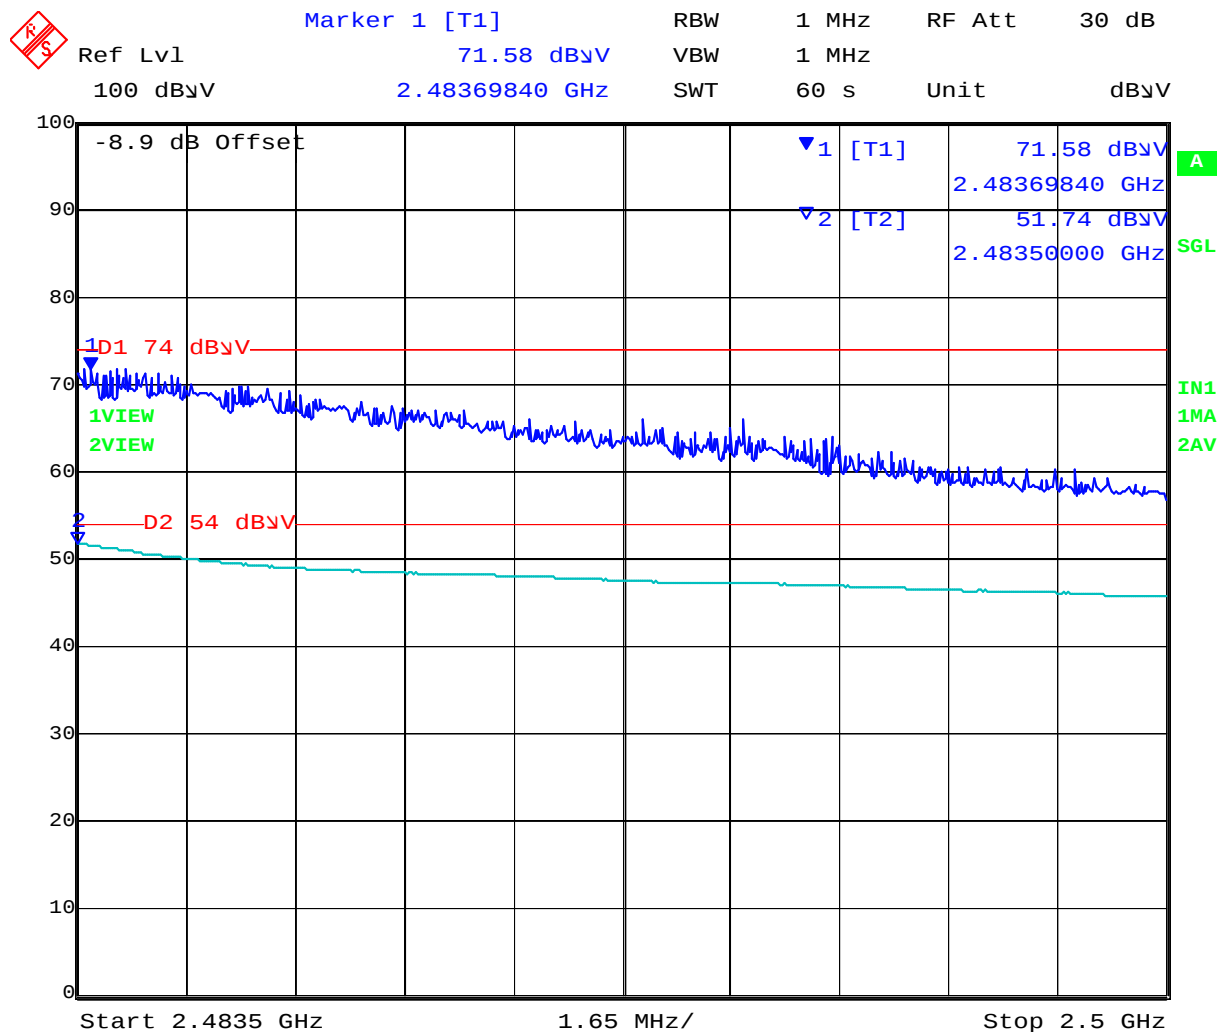


Date: 4.OCT.2010 10:22:29

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 77 of 144

BE 802.11n HT40 2422 MHz 2.2-2.39GHz

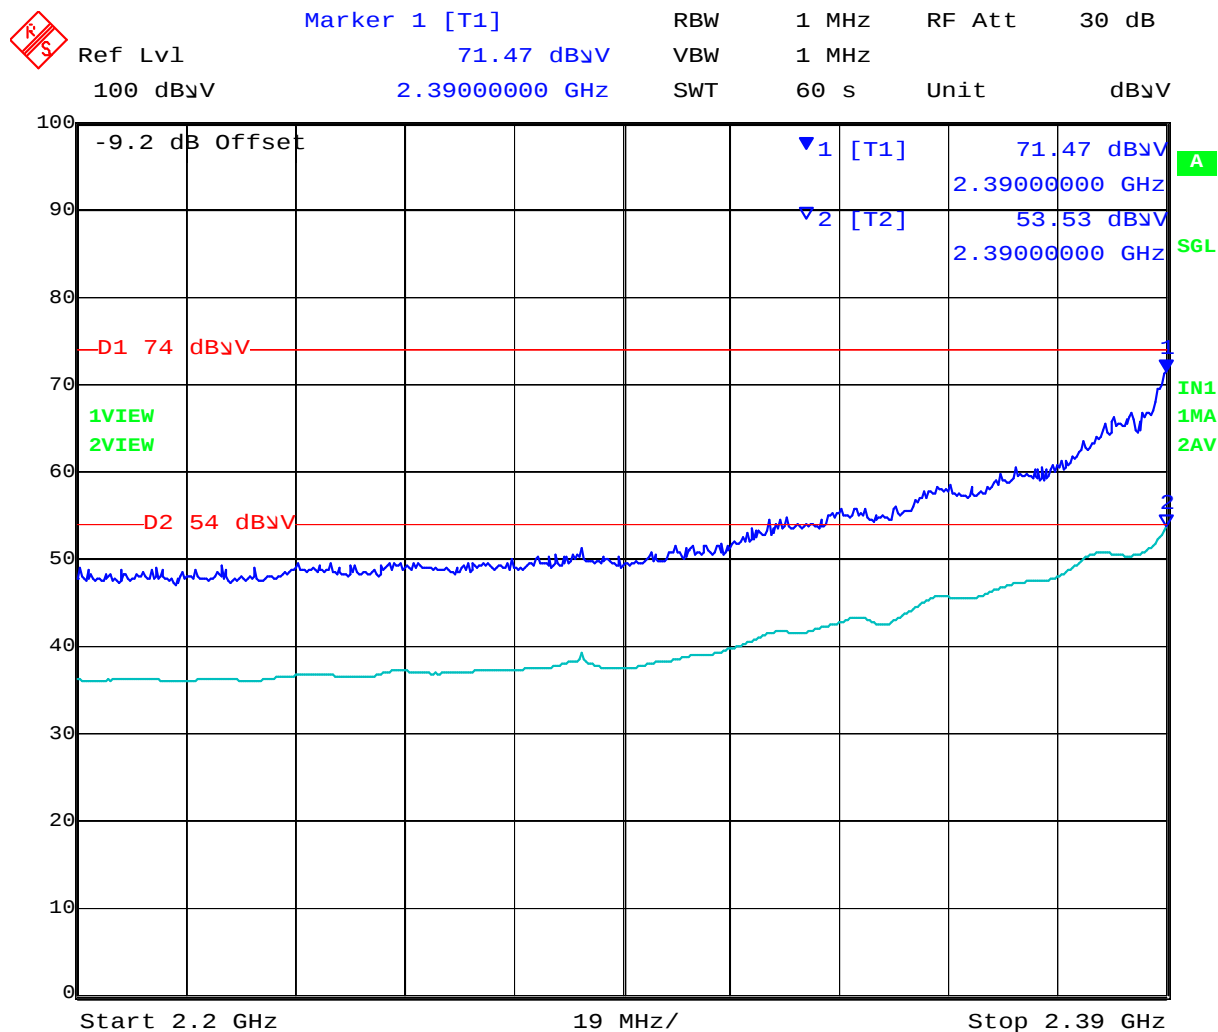


Date: 4.OCT.2010 10:28:32

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 78 of 144

BE 802.11n HT40 2452 MHz 2.4835-2.5GHz

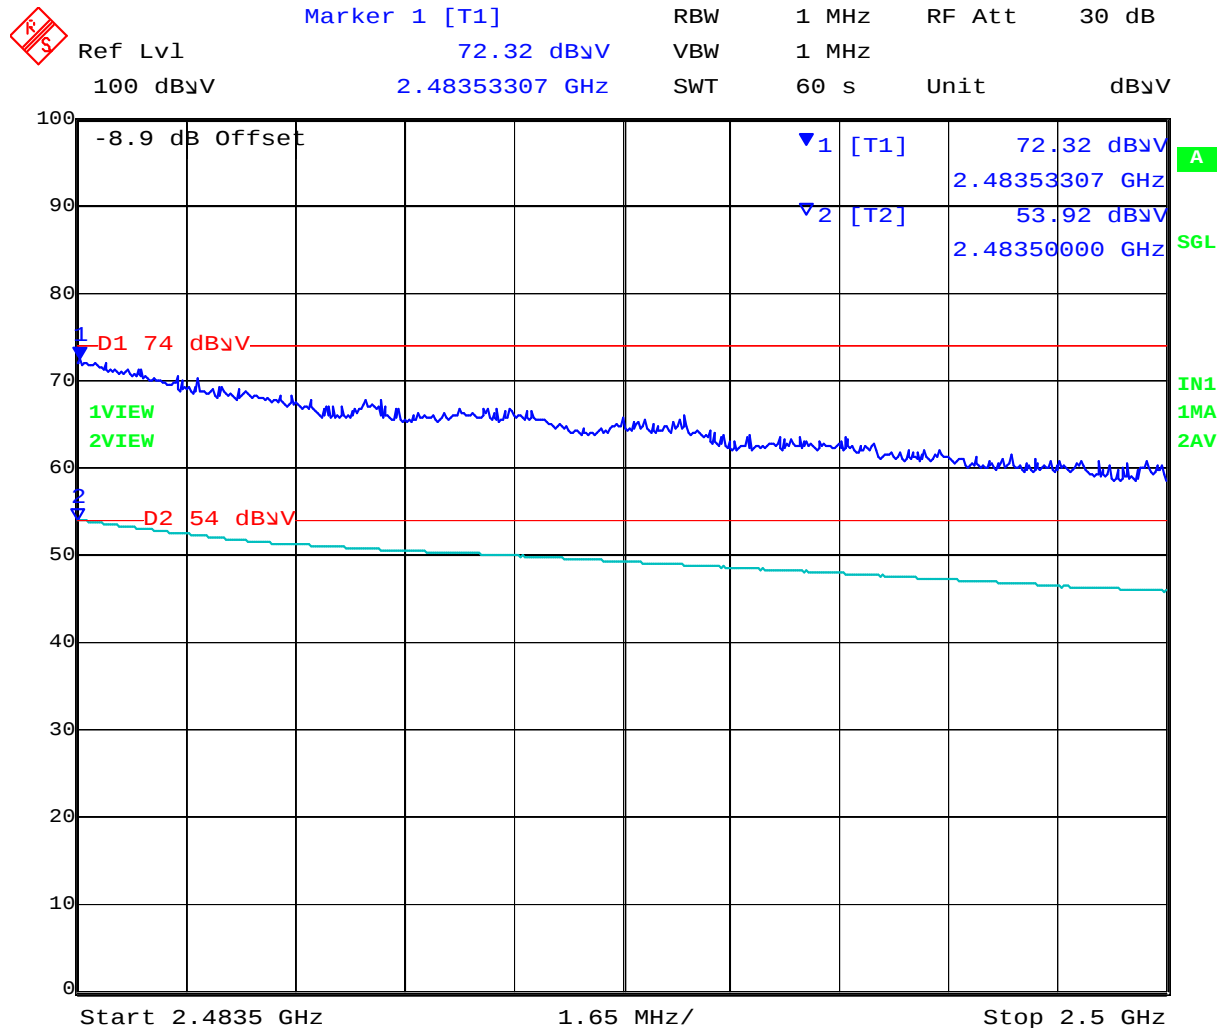

Date: 4.OCT.2010 10:26:35


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 79 of 144

7.3.7 AP-ANT-85 2.4GHz - Transmitter Peak Emissions

Test Freq.	2412 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	26
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	32
Power Setting	17.5	Press. (mBars)	1000
Antenna	AP ANT 85	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

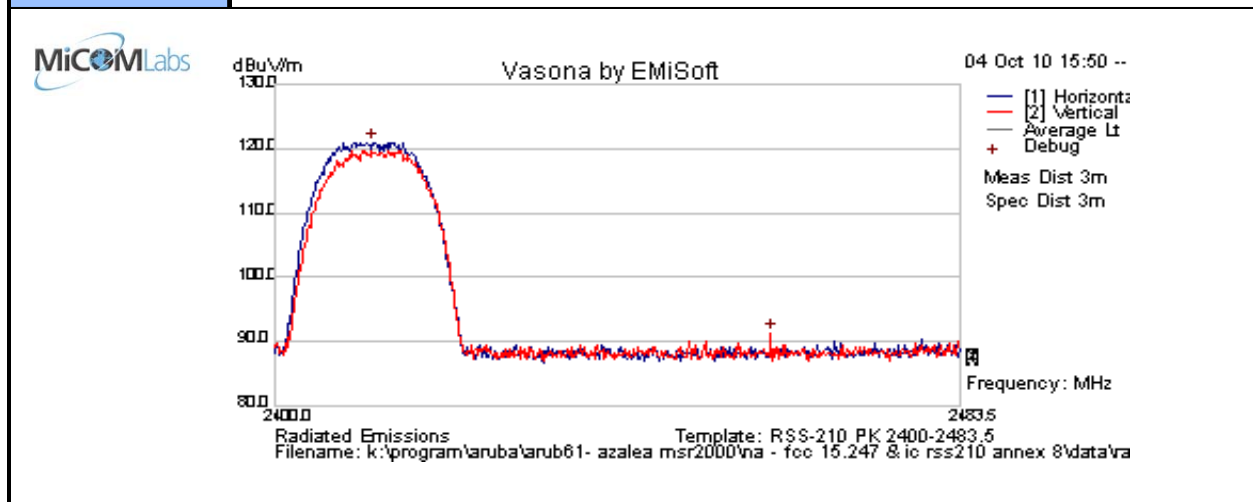

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2411.881	75.9	13.0	32.2	121.0	Peak [Scan]	H						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 80 of 144

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	26
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	32
Power Setting	21	Press. (mBars)	1000
Antenna	AP ANT 85	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

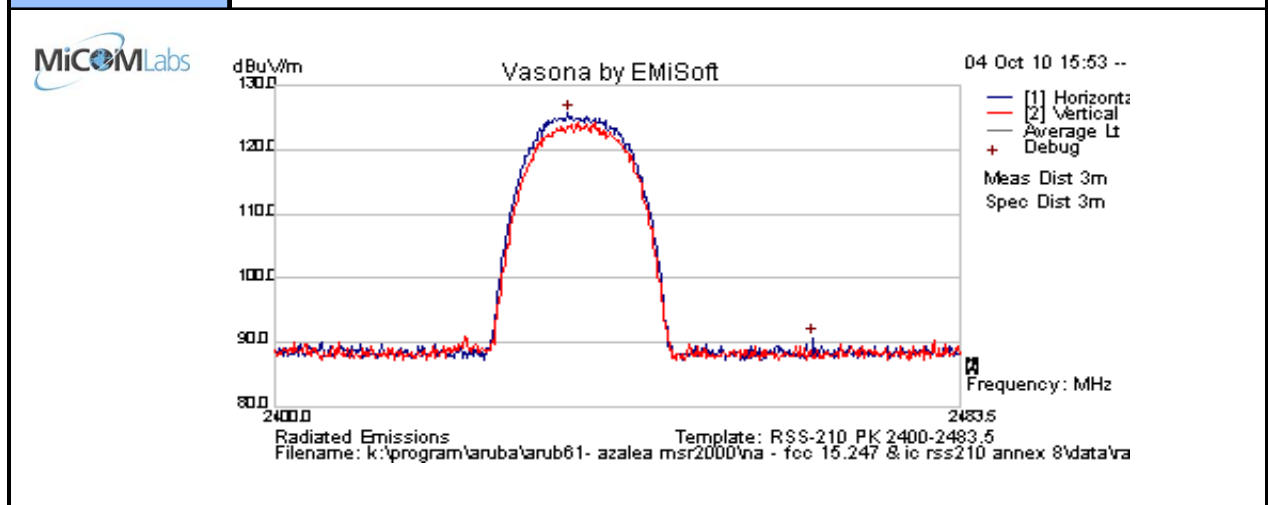

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2435.475	80.6	13.0	32.2	125.8	Peak [Scan]	H						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 81 of 144

Test Freq.	2462 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	26
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	32
Power Setting	17.5	Press. (mBars)	1000
Antenna	AP ANT 85	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

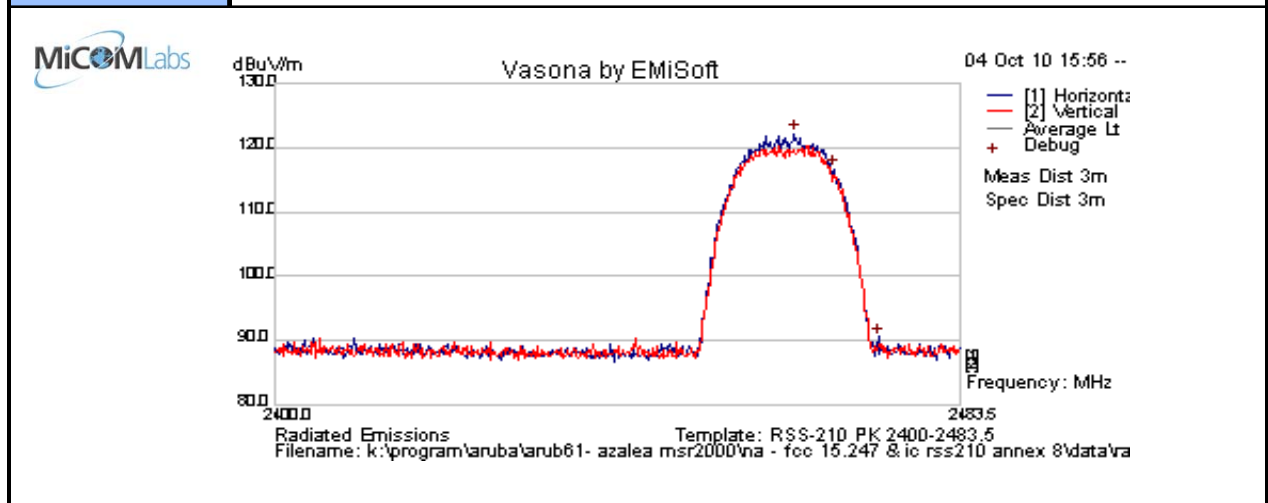

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2463.085	77.0	13.0	32.3	122.2	Peak [Scan]	H						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 82 of 144

Test Freq.	2412 MHz	Engineer	SB
Variant	802.11g; 6 Mbs	Temp (°C)	26
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	32
Power Setting	13.5	Press. (mBars)	1000
Antenna	AP ANT 85	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

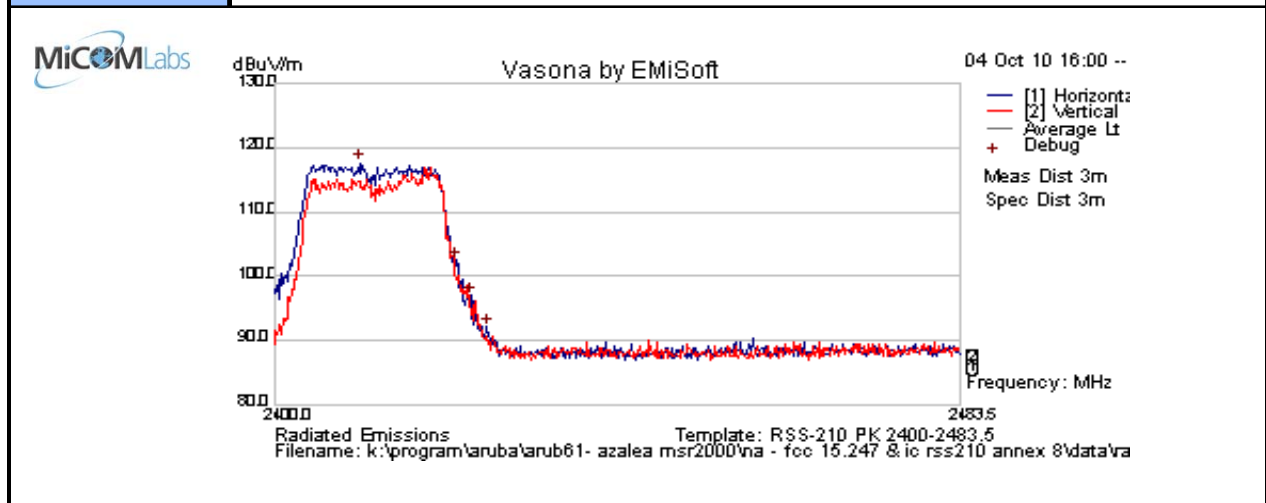

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2410.207	72.6	13.0	32.2	117.7	Peak [Scan]	H						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 83 of 144

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11g; 6 Mbs	Temp (°C)	26
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	32
Power Setting	20	Press. (mBars)	1000
Antenna	AP ANT 85	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

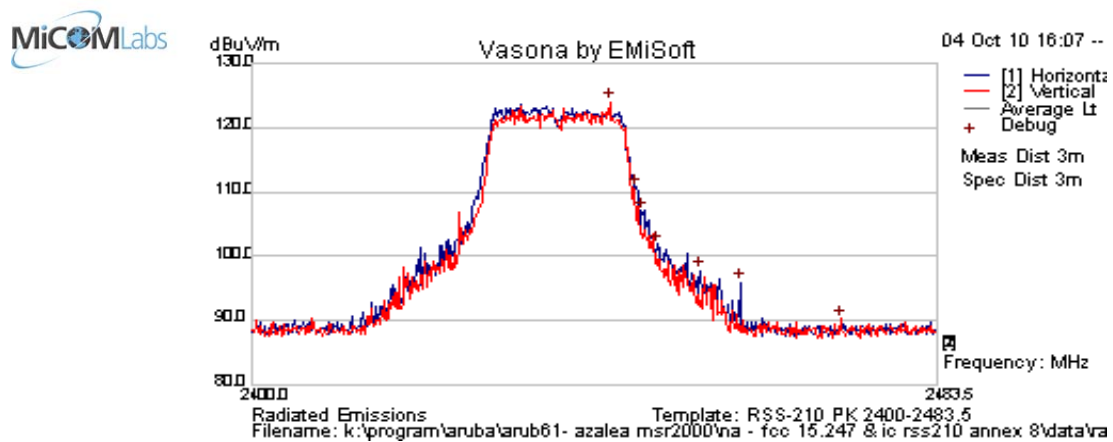

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2443.340	78.8	13.0	32.3	124.0	Peak [Scan]	V						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 84 of 144

Test Freq.	2462 MHz	Engineer	SB
Variant	802.11g; 6 Mbs	Temp (°C)	26
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	32
Power Setting	13.5	Press. (mBars)	1000
Antenna	AP ANT 85	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

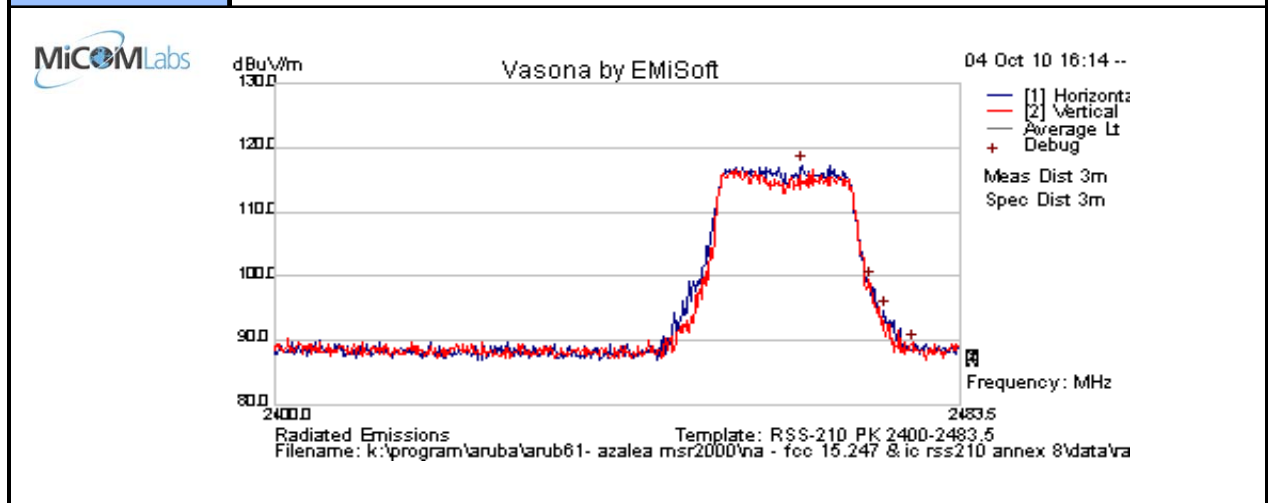

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2464.089	72.0	13.0	32.3	117.3	Peak [Scan]	H						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 85 of 144

Test Freq.	2412 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	26
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	32
Power Setting	14	Press. (mBars)	1000
Antenna	AP ANT 85	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

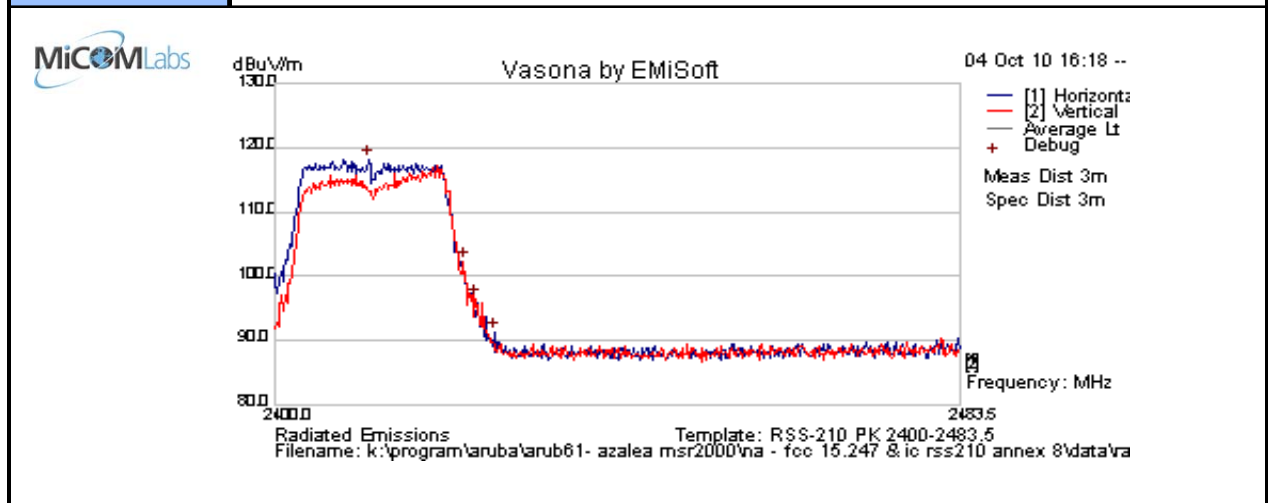

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2411.379	73.1	13.0	32.2	118.2	Peak [Scan]	H						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 86 of 144

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	26
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	32
Power Setting	20	Press. (mBars)	1000
Antenna	AP ANT 85	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

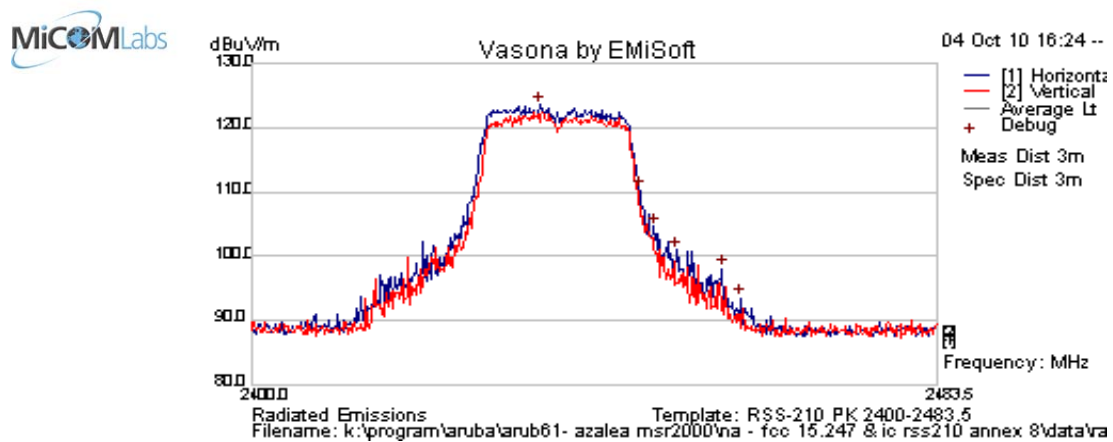

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2434.806	78.3	13.0	32.2	123.5	Peak [Scan]	H						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 87 of 144

Test Freq.	2462 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	26
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	32
Power Setting	12	Press. (mBars)	1000
Antenna	AP ANT 85	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

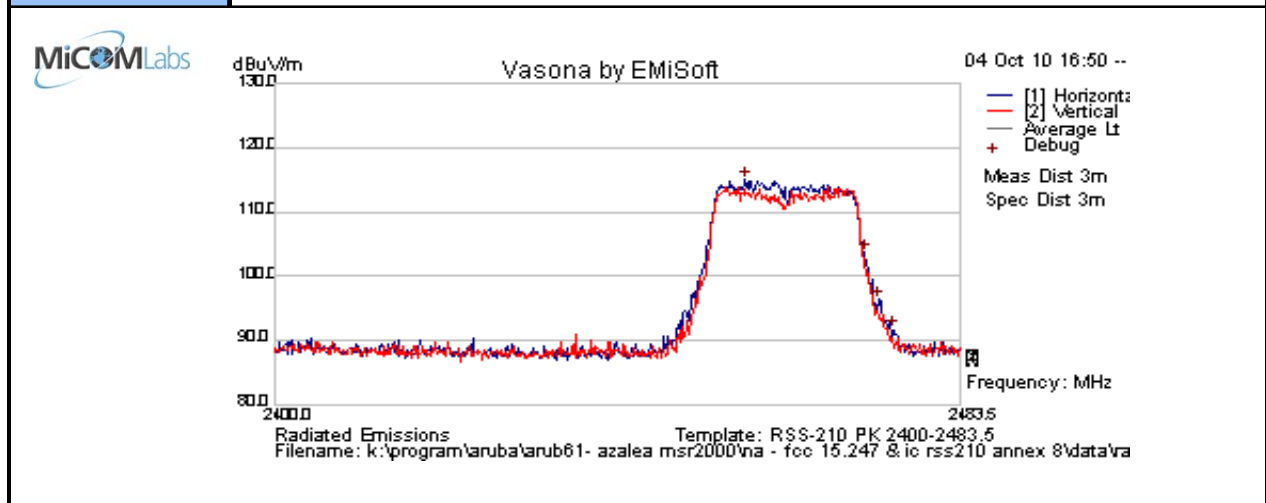

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2457.061	69.8	13.0	32.3	115.1	Peak [Scan]	H						
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 88 of 144

Test Freq.	2422 MHz	Engineer	SB
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	26
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	32
Power Setting	9	Press. (mBars)	1000
Antenna	AP ANT 85	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

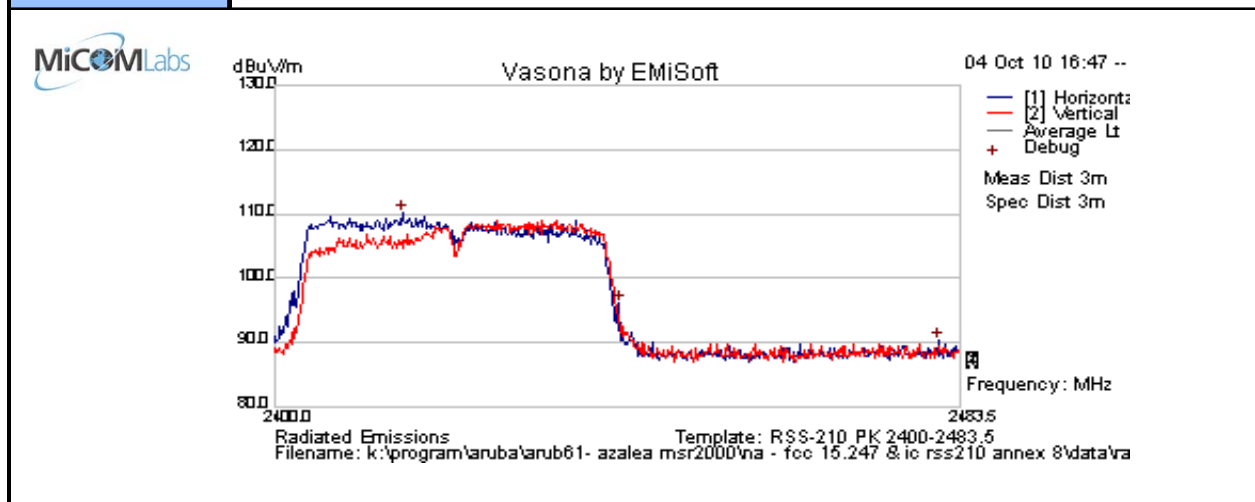

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2415.395	65.0	13.0	32.2	110.1	Peak [Scan]	H						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 89 of 144

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	26
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	32
Power Setting	20	Press. (mBars)	1000
Antenna	AP ANT 85	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

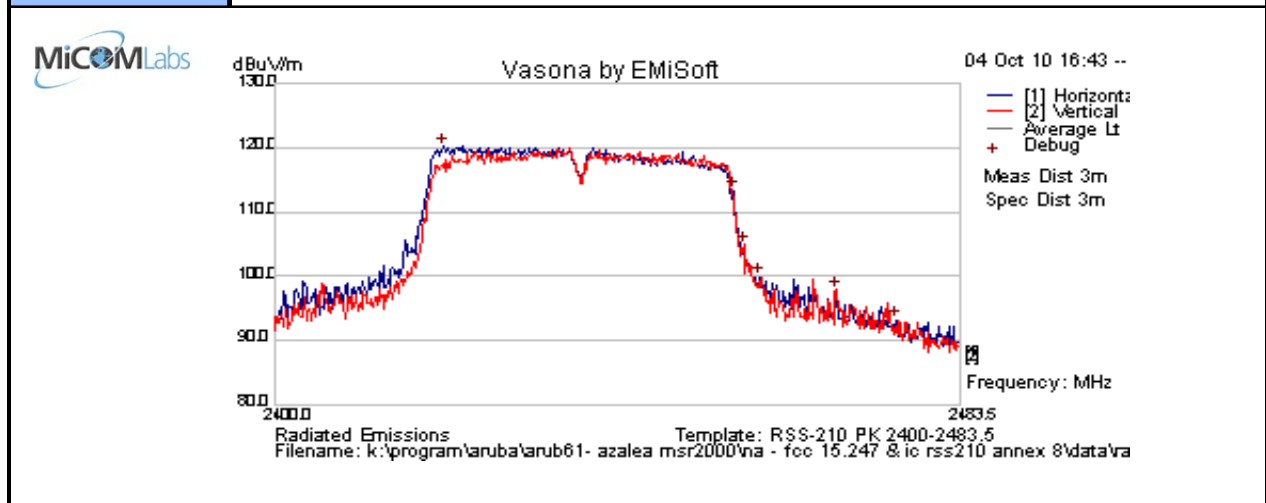

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2420.415	75.1	13.0	32.2	120.2	Peak [Scan]	H						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 90 of 144

Test Freq.	2452 MHz	Engineer	SB
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	26
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	32
Power Setting	9	Press. (mBars)	1000
Antenna	AP ANT 85	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

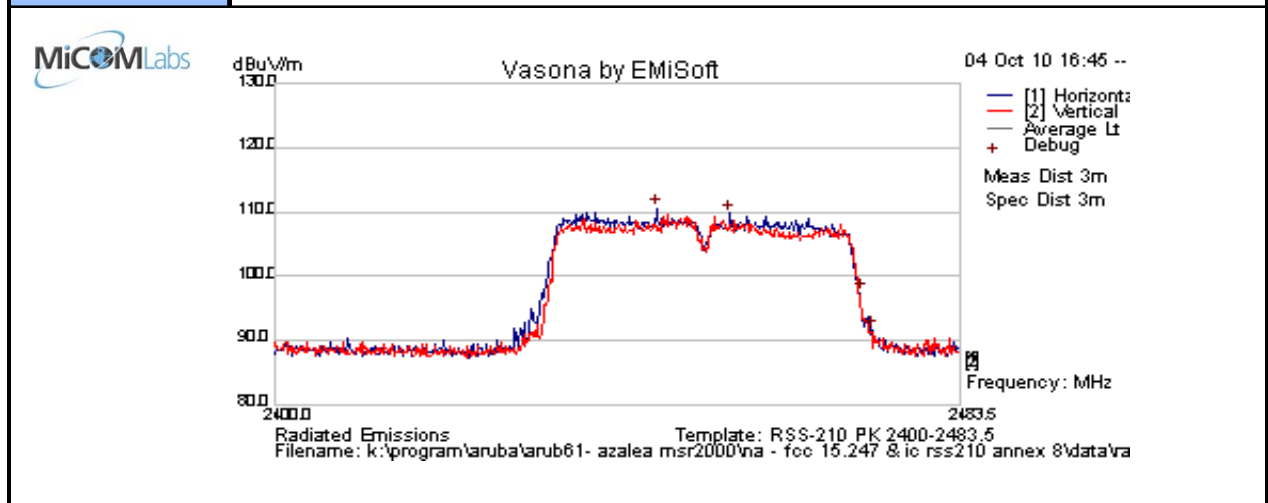

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2446.184	65.4	13.0	32.3	110.7	Peak [Scan]	H						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 91 of 144

7.3.8 AP-ANT-85 2.4GHz - Receiver Emissions

Test Freq.	2437 MHz	Engineer	SB
Variant	Receive in Test Utility	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	Not Applicable in Receive Mode	Press. (mBars)	1003
Antenna	AP-ANT-85		
Test Notes 1			
Test Notes 2			

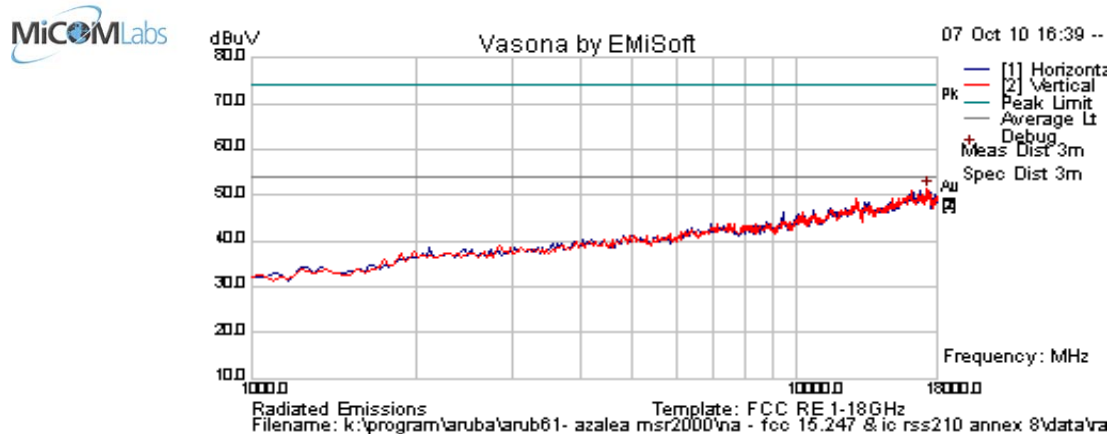

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
No Receiver Emissions within 6dB of limit.												
Legend: TRANS = Transient Emission; RB = Restricted Band; NRB = Non-Restricted Band;												
BE = Emission in Restricted Band Nearest Transmission Band Edge; FUND = Fundamental Freq.												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 92 of 144

7.3.9 AP-ANT-86D 5.8GHz - Transmitter Radiated Spurious Emissions – Above 1 GHz

Test Freq.	5745 MHz	Engineer	SB
Variant	802.11a; 6.5 Mbs	Temp (°C)	27.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	16.5	Press. (mBars)	996
Antenna	AP-ANT-86D	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

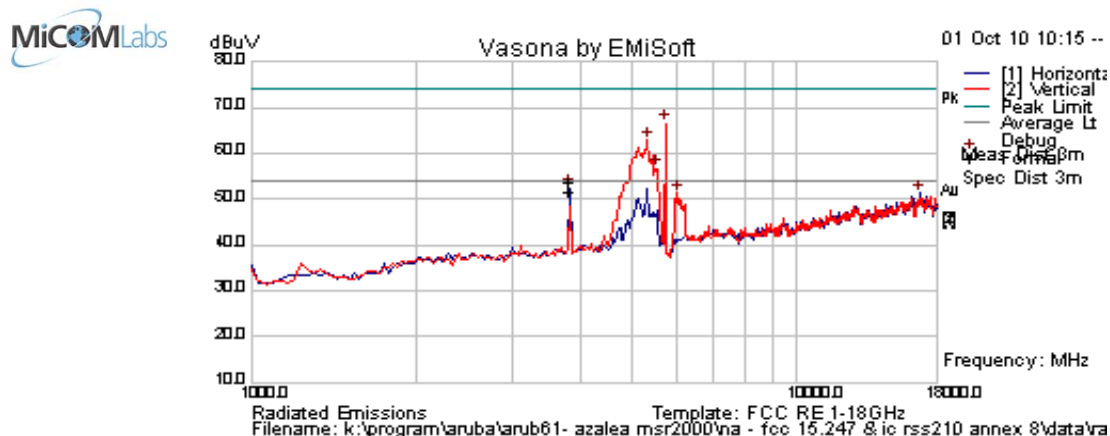

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
3829.950	60.2	3.8	-10.1	53.9	Peak Max	H	98	275	74.0	-20.1	Pass	RB
3829.94996	58.1	3.8	-10.1	51.8	Average Max	H	98	275	54.0	-2.2	Pass	RB
5735.471	70.1	4.8	-8.2	66.6	Peak [Scan]	V	--	--	--	--	n/a	Fund
5326.653	67.7	4.6	-9.5	62.8	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
5531.062	60.7	4.6	-8.7	56.7	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
16773.547	41.0	8.6	1.7	51.4	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
6042.084	54.6	4.9	-8.2	51.3	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 93 of 144

Test Freq.	5785 MHz	Engineer	SB
Variant	802.11a; 6.5 Mbs	Temp (°C)	27.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	20.0	Press. (mBars)	996
Antenna	AP-ANT-86D	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

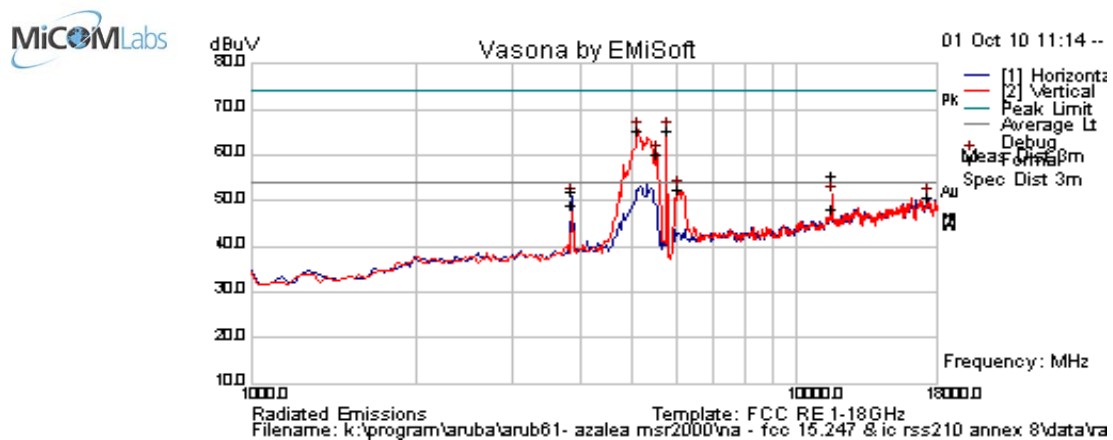

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
11569.910	49.8	6.8	-1.2	55.4	Peak Max	V	101	341	74.0	-18.6	Pass	RB
3856.613	58.4	3.8	-10.2	52.1	Peak Max	H	99	338	74.0	-21.9	Pass	RB
11569.910	42.7	6.8	-1.2	48.3	Average Max	V	101	341	54	-5.7	Pass	RB
3856.613	55.4	3.8	-10.2	49.0	Average Max	H	99	338	54	-5.0	Pass	RB
5769.539	68.9	4.8	-8.3	65.4	Peak [Scan]	V	--	--	--	--	n/a	Fund
5531.062	64.3	4.6	-8.7	60.2	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
6042.084	55.9	4.9	-8.2	52.6	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
17318.637	40.4	8.7	1.7	50.8	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 94 of 144



Test Freq.	5825 MHz	Engineer	SB
Variant	802.11a; 6.5 Mbs	Temp (°C)	27.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	20.0	Press. (mBars)	996
Antenna	AP-ANT-86D	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

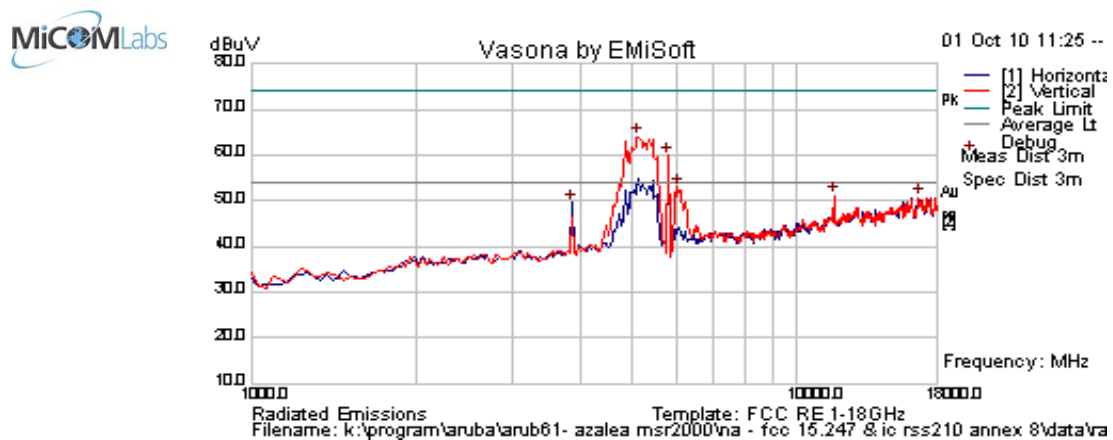

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
11649.990	49.1	6.8	-1.9	54.0	Peak Max	V	113	158	74.0	-20.0	Pass	RB
3883.322	57.9	3.8	-10.4	51.4	Peak Max	H	98	321	74.0	-22.6	Pass	RB
11649.990	40.8	6.8	-1.9	45.7	Average Max	V	113	158	54	-8.3	Pass	RB
3883.322	55.0	3.8	-10.4	48.5	Average Max	H	98	321	54	-5.5	Pass	RB
5803.607	63.5	4.8	-8.3	60.0	Peak [Scan]	V	--	--	--	--	n/a	Fund
6042.084	56.3	4.9	-8.2	52.9	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
16705.411	40.7	8.7	1.4	50.8	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

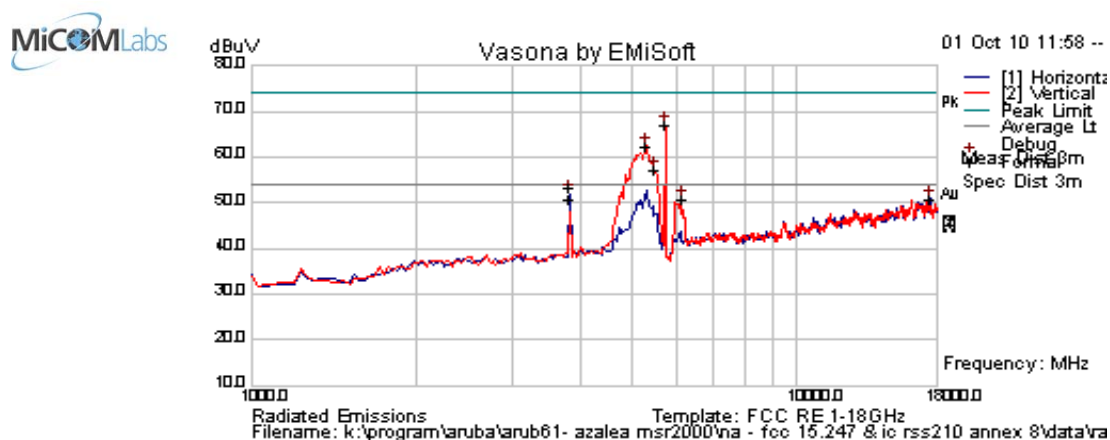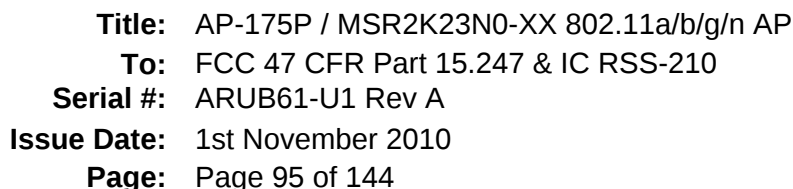


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
3830.005	59.5	3.8	-10.1	53.2	Peak Max	H	98	277	74.0	-20.8	Pass	RB
3830.005	57.2	3.8	-10.1	50.9	Average Max	H	98	277	54.0	-3.1	Pass	RB
5735.471	70.4	4.8	-8.2	66.9	Peak [Scan]	V	--	--	--	--	n/a	Fund
5292.585	67.3	4.6	-9.5	62.5	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
5496.994	61.2	4.6	-8.7	57.1	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
17591.182	41.0	8.8	1.1	50.9	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
6144.289	53.2	5.0	-7.3	50.9	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 96 of 144

Test Freq.	5785 MHz	Engineer	SB
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	28
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	30
Power Setting	20	Press. (mBars)	997
Antenna	AP-ANT-86D	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

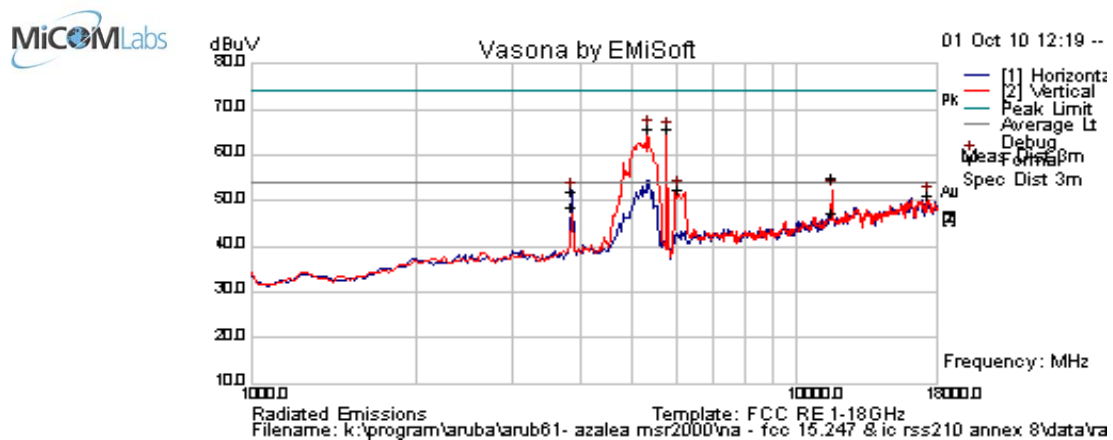

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
11569.897	49.6	6.8	-1.2	55.2	Peak Max	V	102	342	74.0	-18.8	Pass	RB
3856.606	58.3	3.8	-10.2	51.9	Peak Max	H	100	344	74.0	-22.1	Pass	RB
11569.897	41.9	6.8	-1.2	47.5	Average Max	V	102	342	54	-6.5	Pass	RB
3856.606	55.1	3.8	-10.2	48.7	Average Max	H	100	344	54	-5.3	Pass	RB
5326.653	70.7	4.6	-9.5	65.8	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
5769.539	69.1	4.8	-8.3	65.6	Peak [Scan]	V	--	--	--	--	n/a	Fund
6042.084	55.7	4.9	-8.2	52.4	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
17284.569	40.9	8.6	1.6	51.1	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 97 of 144

Test Freq.	5825 MHz	Engineer	SB
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	28
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	30
Power Setting	20	Press. (mBars)	997
Antenna	AP-ANT-86D	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

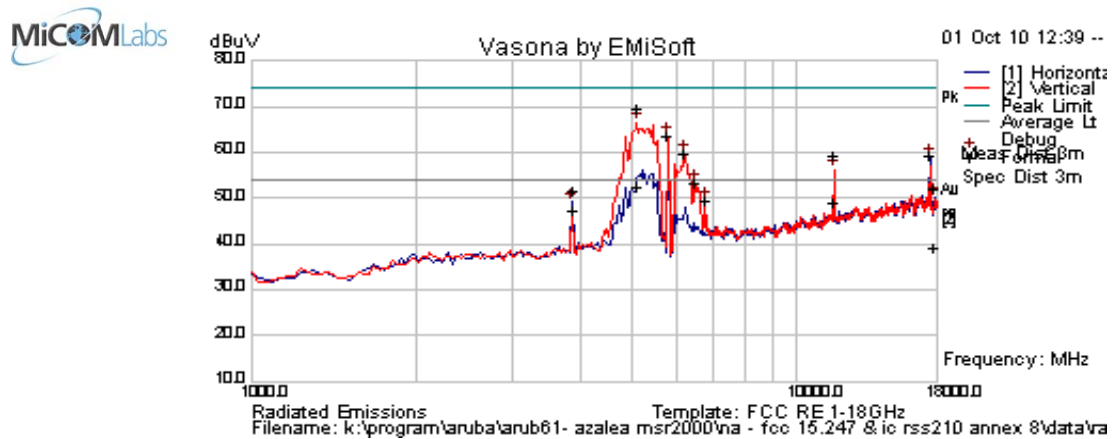

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5098.517	73.7	4.6	-8.8	69.6	Peak Max	V	98	247	74.0	-4.5	Pass	RB
11649.94	54.4	6.8	-1.9	59.4	Peak Max	V	151	329	74.0	-14.7	Pass	RB
17899.399	42.2	8.8	0.9	51.9	Peak Max	H	170	50	74	-22.2	Pass	RB
3883.342	58.2	3.8	-10.4	51.6	Peak Max	H	98	317	74	-22.4	Pass	RB
5098.517	56.7	4.6	-8.8	52.5	Average Max	V	98	247	54	-1.5	Pass	RB
11649.940	44.1	6.8	-1.9	49.0	Average Max	V	151	329	54	-5.0	Pass	RB
17899.399	29.5	8.8	0.9	39.2	Average Max	H	170	50	54	-14.8	Pass	RB
3883.342	53.8	3.8	-10.4	47.3	Average Max	H	98	317	54	-6.7	Pass	RB
5803.607	67.1	4.8	-8.3	63.6	Peak [Scan]	V	--	--	--	--	n/a	Fund
6246.493	61.4	5.0	-6.7	59.7	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
17488.978	48.9	8.8	1.5	59.2	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
6484.970	55.0	5.1	-6.6	53.5	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
6791.583	50.2	5.3	-6.0	49.5	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 98 of 144

Test Freq.	5755 MHz	Engineer	SB
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	28.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	30
Power Setting	15	Press. (mBars)	998
Antenna	AP-ANT-86D	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

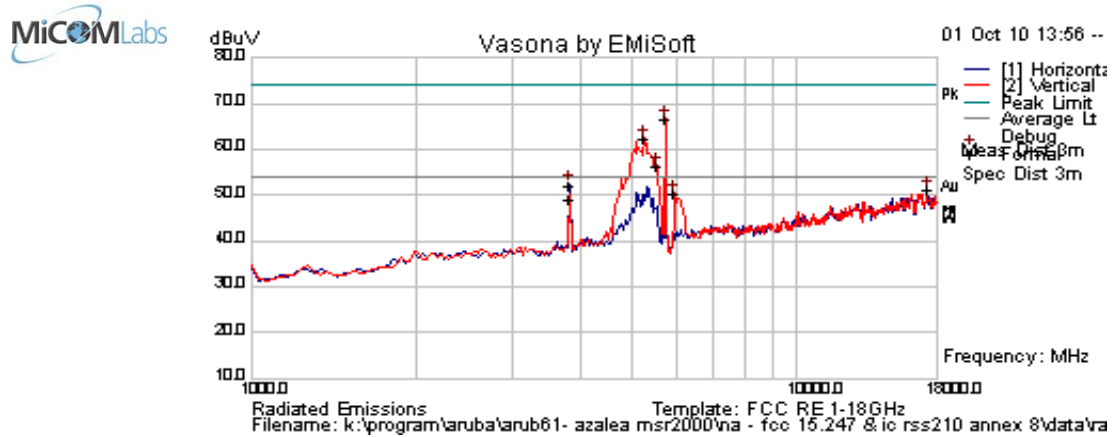

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
3836.621	58.3	3.8	-10.2	51.9	Peak Max	H	101	373	74.0	-22.1	Pass	RB
3836.621	55.4	3.8	-10.2	49.0	Average Max	H	101	373	54.0	-5.0	Pass	RB
5735.471	70.2	4.8	-8.2	66.7	Peak [Scan]	V	--	--	--	--	n/a	Fund
5258.517	67.2	4.6	-9.5	62.4	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
5531.062	60.5	4.6	-8.7	56.5	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
17318.637	40.9	8.7	1.7	51.3	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
5973.948	53.8	4.9	-8.2	50.4	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 99 of 144

Test Freq.	5785 MHz	Engineer	SB
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	28.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	30
Power Setting	20	Press. (mBars)	998
Antenna	AP-ANT-86D	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

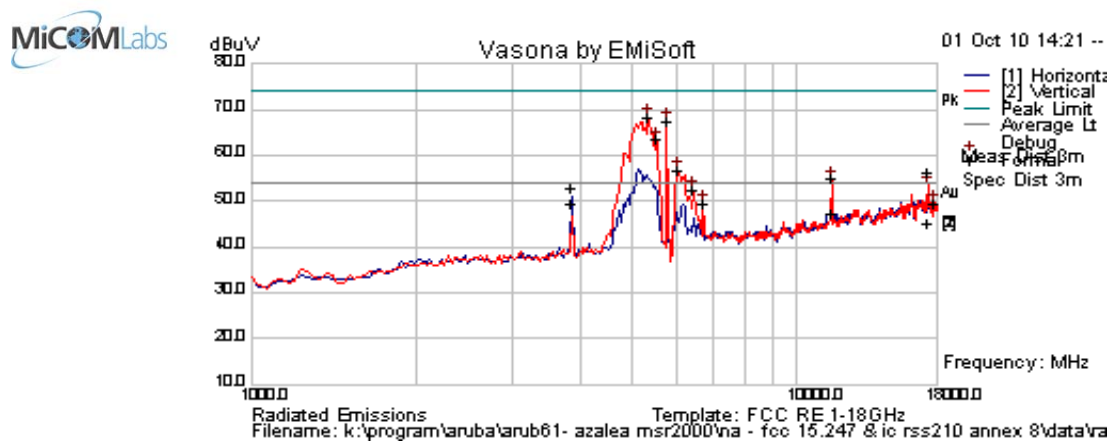

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
11569.985	49.6	6.8	-1.2	55.2	Peak Max	V	149	158	74.0	-18.8	Pass	RB
3856.633	59.4	3.8	-10.2	53.0	Peak Max	H	98	323	74.0	-21.0	Pass	RB
17354.970	45.4	8.7	2.1	56.2	Peak Max	H	111	327	74	-17.8	Pass	RB
11569.985	41.6	6.8	-1.2	47.2	Average Max	V	149	158	54	-6.8	Pass	RB
3856.633	56.0	3.8	-10.2	49.6	Average Max	H	98	323	54	-4.4	Pass	RB
17354.970	34.2	8.7	2.1	45.0	Average Max	H	111	327	54	-9.0	Pass	RB
5344.962	76.0	4.6	-9.4	71.3	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
5769.539	71.1	4.8	-8.3	67.6	Peak [Scan]	V	--	--	--	--	n/a	Fund
5531.062	67.5	4.6	-8.7	63.5	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
6076.152	59.6	4.9	-7.9	56.6	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
6450.902	54.2	5.1	-6.9	52.5	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
17897.796	40.0	8.8	0.9	49.7	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
6723.447	50.3	5.2	-5.9	49.6	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 100 of 144

Test Freq.	5815 MHz	Engineer	SB
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	28.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	30
Power Setting	20	Press. (mBars)	998
Antenna	AP-ANT-86D	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

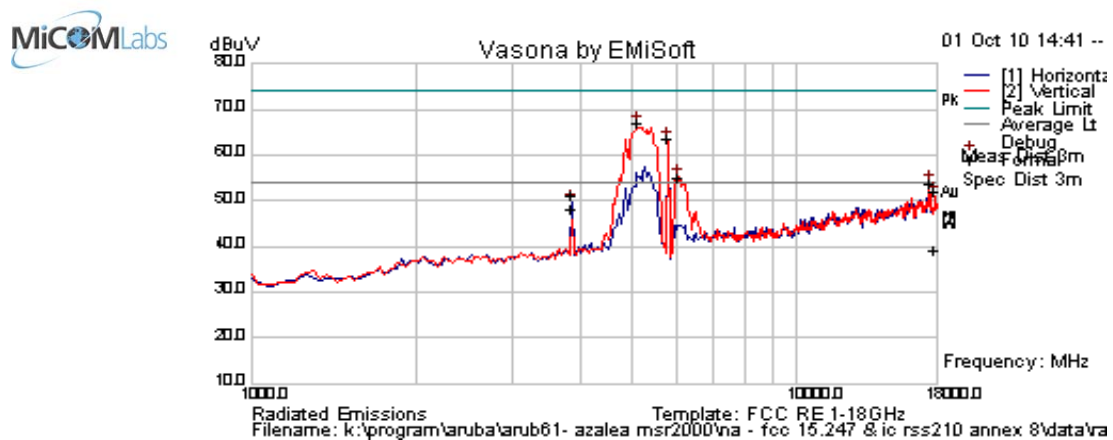

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
17867.845	42.4	8.8	0.9	52.1	Peak Max	V	141	254	74.0	-21.9	Pass	RB
3876.648	57.7	3.8	-10.3	51.2	Peak Max	H	98	314	74.0	-22.8	Pass	RB
17867.845	29.5	8.8	0.9	39.3	Average Max	V	141	254	54	-14.8	Pass	RB
3876.648	54.5	3.8	-10.3	48.0	Average Max	H	98	314	54	-6.0	Pass	RB
5088.176	71.0	4.6	-8.8	66.9	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
5803.607	66.9	4.8	-8.3	63.4	Peak [Scan]	H	--	--	--	--	n/a	Fund
6076.152	58.2	4.9	-7.9	55.2	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
17454.910	42.9	8.7	2.0	53.7	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 101 of 144

7.3.10 AP-ANT-86D 5.8GHz - Transmitter Band Edge Emissions

ARUB61 Band Edge 5745 MHz; 802.11a 5350-5460 MHz ART=16.5

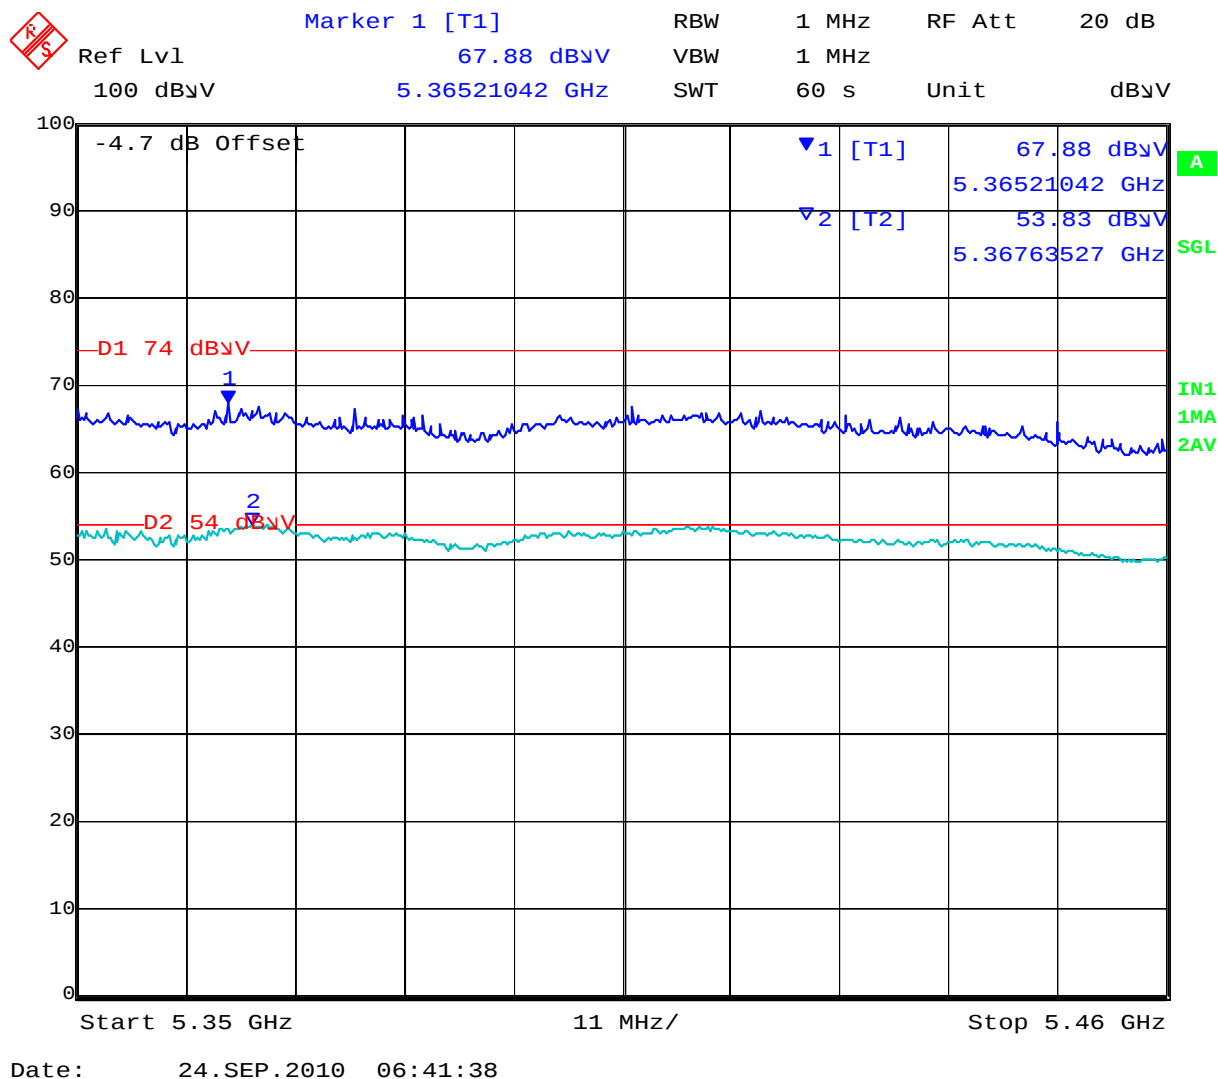


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 102 of 144

ARUB61 Band Edge 5745 MHz; 802.11n HT-20 5350-5460 MHz ART=16.5

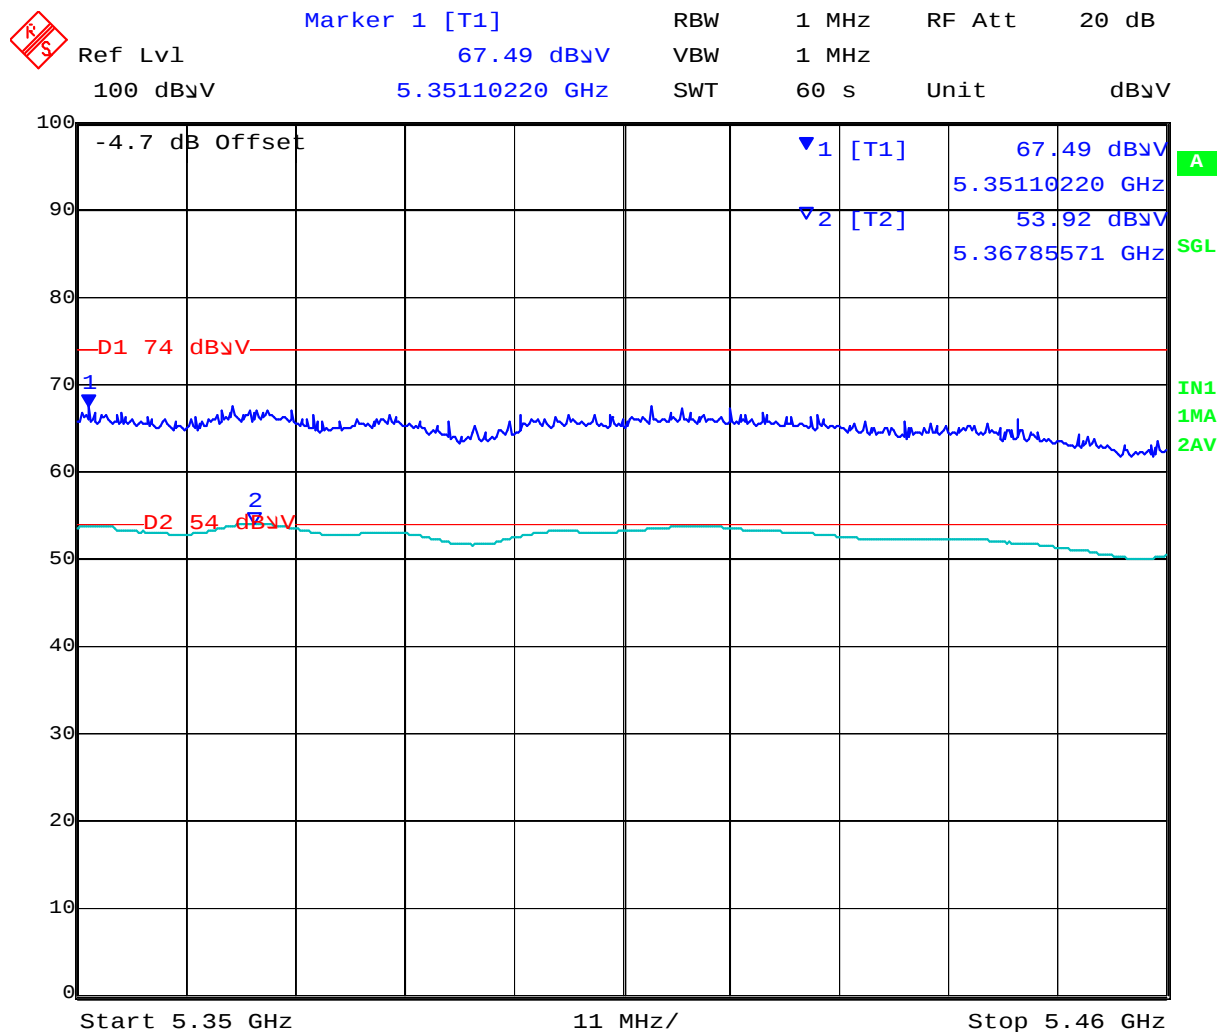


Date: 24.SEP.2010 06:44:15

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 103 of 144

ARUB61 Band Edge 5755 MHz; 802.11n ht-40 5350-5460 MHz ART=15

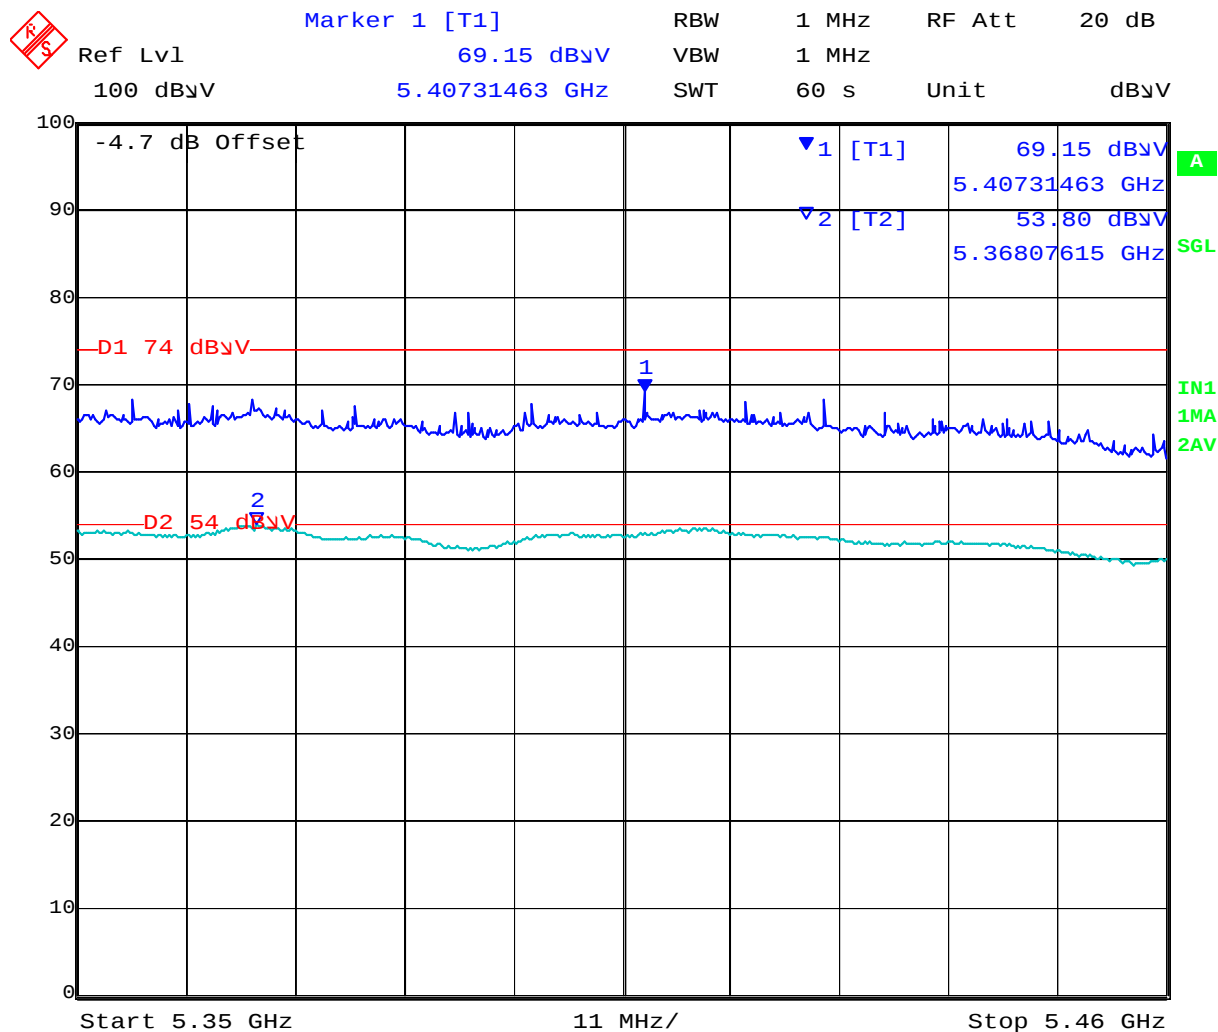

Date: 24.SEP.2010 06:37:38


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 104 of 144

7.3.11 AP-ANT-86D 5.8GHz - Transmitter Peak Emissions

Test Freq.	5745 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	29
Freq. Range	5725 - 5850 MHz	Rel. Hum.(%)	30
Power Setting	16.5	Press. (mBars)	999
Antenna	AP ANT-86D	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

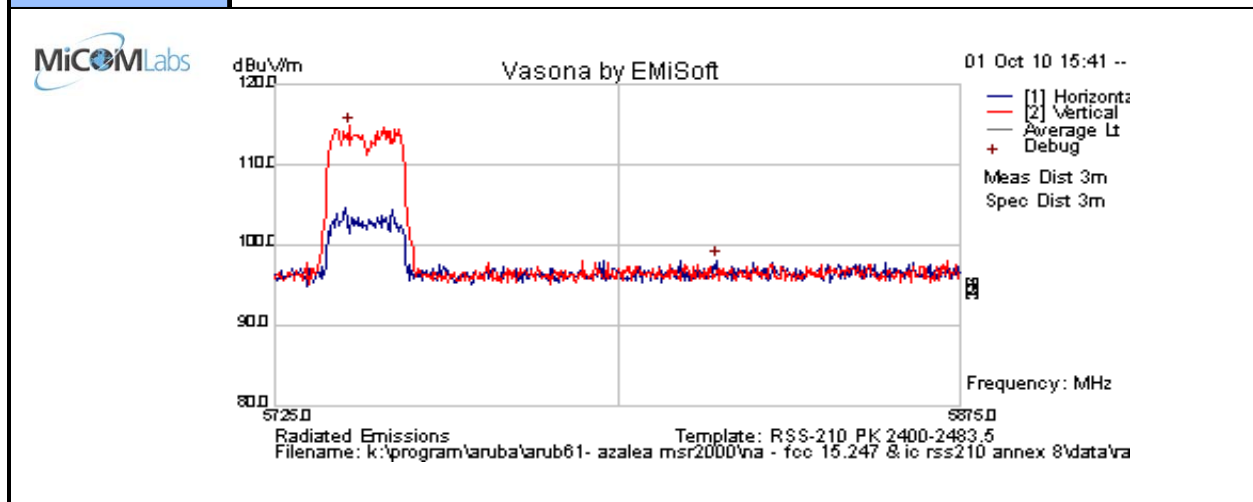

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5741.232	65.1	14.8	35.0	114.9	Peak [Scan]	V						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 105 of 144

Test Freq.	5785 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	29
Freq. Range	5725 - 5850 MHz	Rel. Hum.(%)	30
Power Setting	20	Press. (mBars)	999
Antenna	AP ANT-86D	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

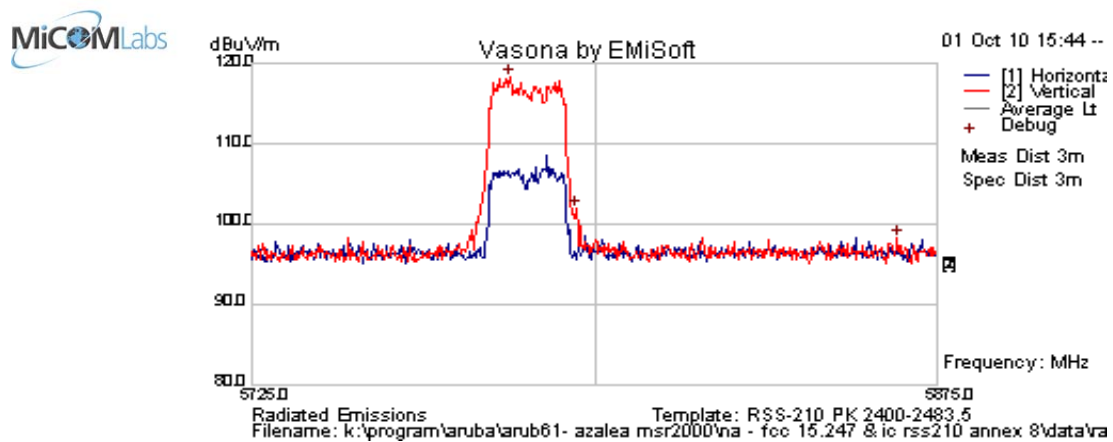

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5781.212	68.5	14.8	35.0	118.3	Peak [Scan]	V						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 106 of 144

Test Freq.	5825 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	29
Freq. Range	5725 - 5850 MHz	Rel. Hum.(%)	30
Power Setting	20	Press. (mBars)	999
Antenna	AP ANT-86D	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

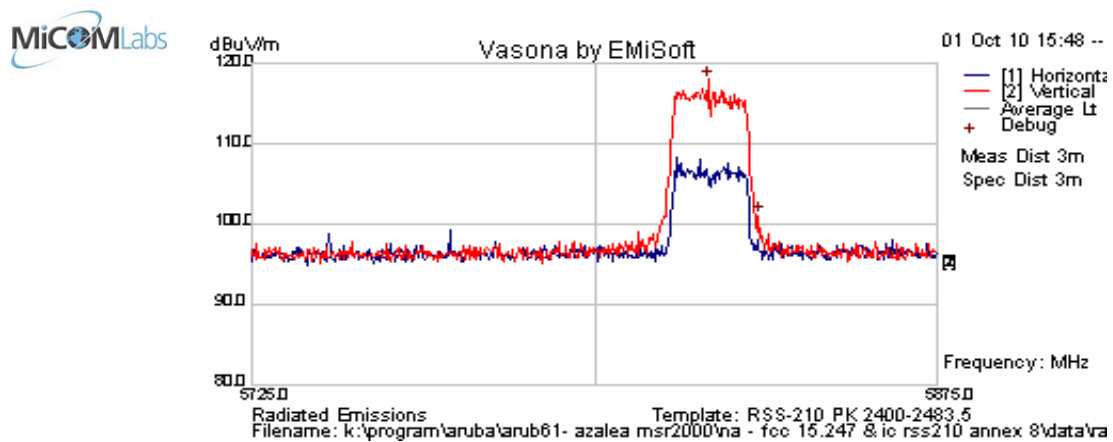

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5824.499	68.2	14.8	35.0	118.1	Peak [Scan]	V						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 107 of 144

Test Freq.	5745 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	29
Freq. Range	5725 - 5850 MHz	Rel. Hum.(%)	30
Power Setting	16.5	Press. (mBars)	999
Antenna	AP ANT-86D	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

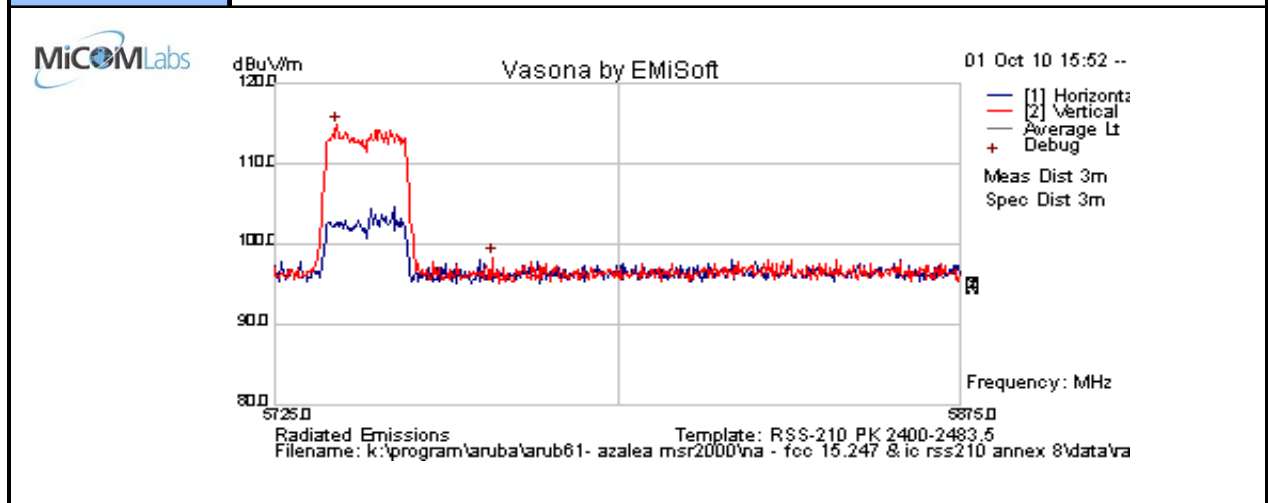

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5738.527	65.2	14.8	35.0	114.9	Peak [Scan]	V						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 108 of 144

Test Freq.	5785 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	29
Freq. Range	5725 - 5850 MHz	Rel. Hum.(%)	30
Power Setting	20	Press. (mBars)	999
Antenna	AP ANT-86D	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

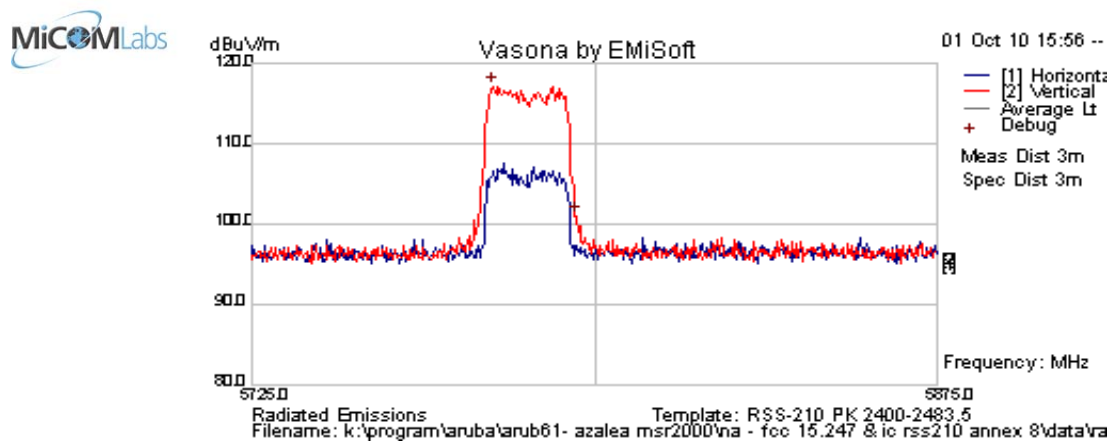

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5777.605	67.5	14.8	35.0	117.2	Peak [Scan]	V						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 109 of 144

Test Freq.	5825 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	29
Freq. Range	5725 - 5850 MHz	Rel. Hum.(%)	30
Power Setting	20	Press. (mBars)	999
Antenna	AP ANT-86D	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

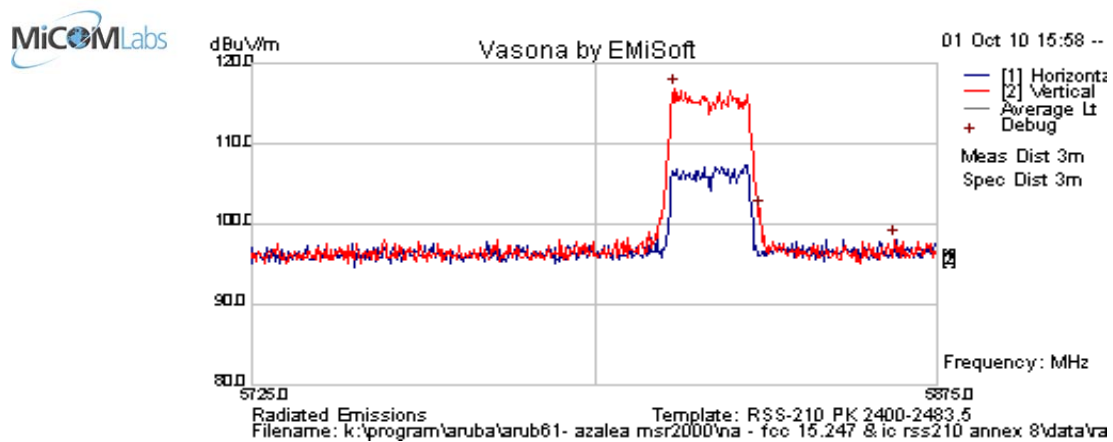

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5816.984	67.2	14.8	35.0	117.0	Peak [Scan]	V						pk
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 110 of 144

Test Freq.	5755 MHz	Engineer	SB
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	29
Freq. Range	5725 - 5850 MHz	Rel. Hum.(%)	30
Power Setting	15	Press. (mBars)	999
Antenna	AP ANT-86D	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

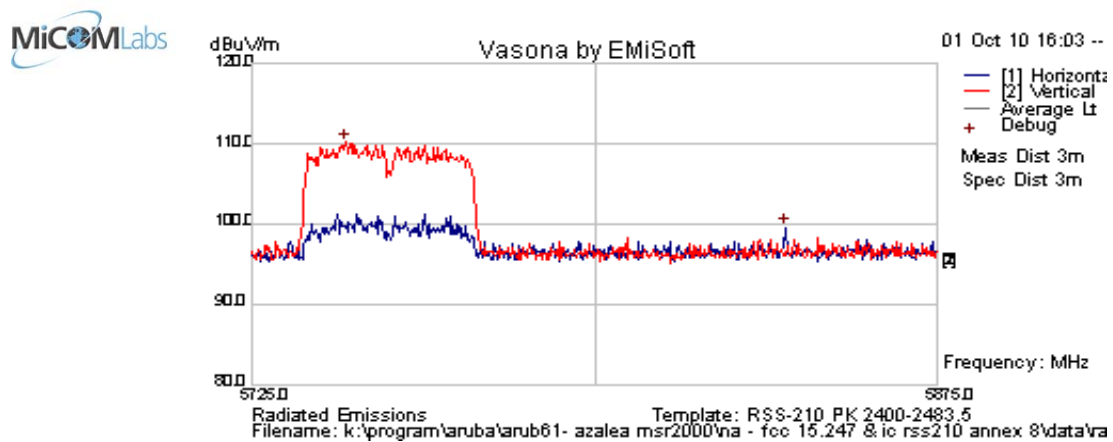

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5745.441	60.5	14.8	35.0	110.2	Peak [Scan]	V						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 111 of 144

Test Freq.	5785 MHz	Engineer	SB
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	29
Freq. Range	5725 - 5850 MHz	Rel. Hum.(%)	30
Power Setting	20	Press. (mBars)	999
Antenna	AP ANT-86D	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

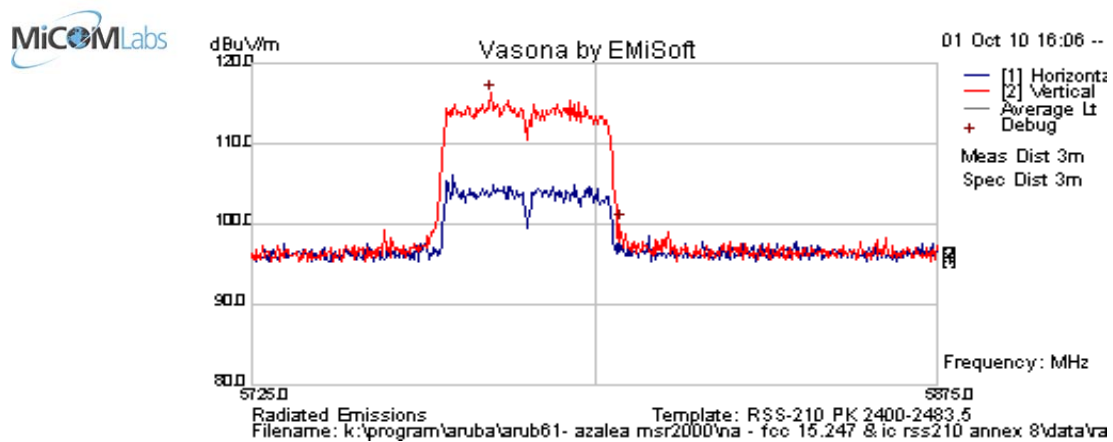

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5777.004	66.6	14.8	35.0	116.4	Peak [Scan]	V						pk
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 112 of 144

Test Freq.	5815 MHz	Engineer	SB
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	29
Freq. Range	5725 - 5850 MHz	Rel. Hum.(%)	30
Power Setting	20	Press. (mBars)	999
Antenna	AP ANT-86D	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

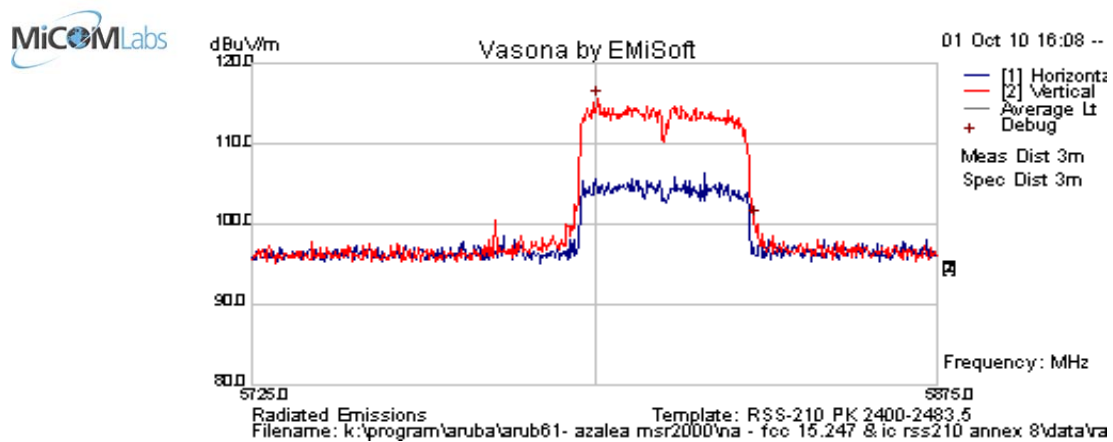

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5800.451	65.8	14.8	35.0	115.6	Peak [Scan]	V						pk
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 113 of 144

7.3.12 AP-ANT-86D 5.8GHz - Receiver Emissions

Test Freq.	5785 MHz	Engineer	SB
Variant	Receive in Test Utility	Temp (°C)	29
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	30
Power Setting	Not Applicable in Receive Mode	Press. (mBars)	998
Antenna	AP-ANT-86D		
Test Notes 1			
Test Notes 2			

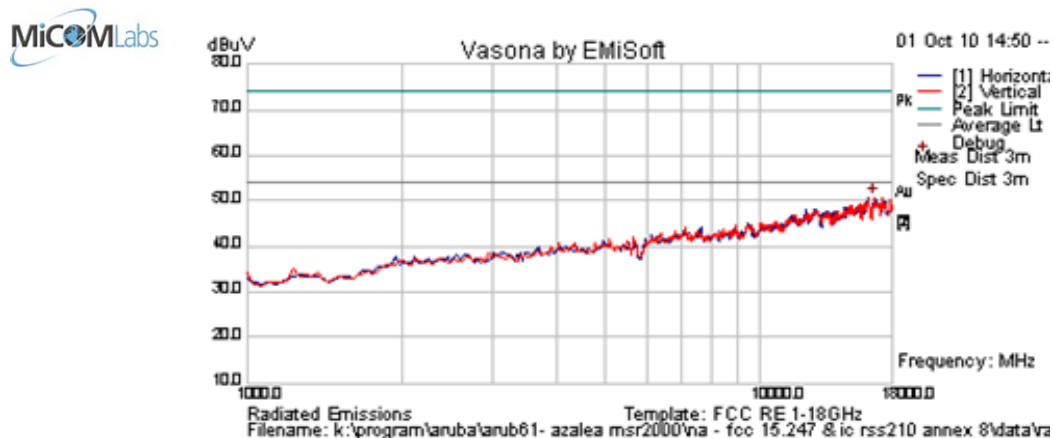

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
No Receiver Emissions within 6dB of limit.												
Legend: TRANS = Transient Emission; RB = Restricted Band; NRB = Non-Restricted Band;												
BE = Emission in Restricted Band Nearest Transmission Band Edge; FUND = Fundamental Freq.												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 114 of 144

7.3.13 AP-ANT-89 5.8GHz - Transmitter Radiated Spurious Emissions – Above 1 GHz

Test Freq.	5745 MHz	Engineer	SB
Variant	802.11a; 6.5 Mbs	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	18	Press. (mBars)	1003
Antenna	AP-ANT-89	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

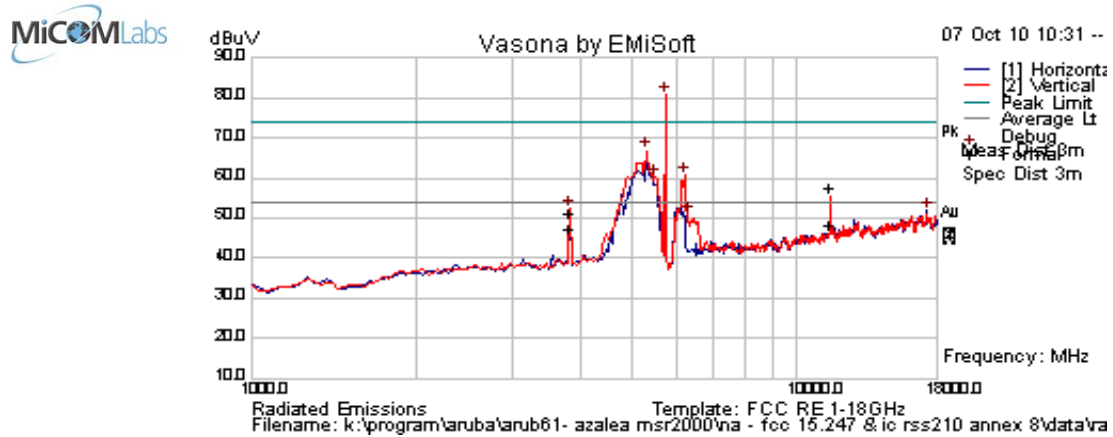

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
11489.960	52.1	6.8	-1.1	57.8	Peak Max	V	194	356	74.0	-16.3	Pass	RB
3829.99	57.3	3.8	-10.1	51.0	Peak Max	V	100	362	74.0	-23.0	Pass	RB
11489.960	42.7	6.8	-1.1	48.3	Average Max	V	194	356	54	-5.7	Pass	RB
3829.990	53.6	3.8	-10.1	47.4	Average Max	V	100	362	54	-6.6	Pass	RB
5735.471	84.3	4.8	-8.2	80.8	Peak [Scan]	V	--	--	--	--	n/a	Fund
5292.585	71.6	4.6	-9.5	66.7	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
6212.425	62.7	5.0	-7.0	60.7	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
5496.994	64.4	4.6	-8.7	60.2	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
17284.569	41.6	8.6	1.6	51.8	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
6314.629	52.3	5.0	-6.8	50.6	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 115 of 144

Test Freq.	5785 MHz	Engineer	SB
Variant	802.11a; 6.5 Mbs	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	20	Press. (mBars)	1003
Antenna	AP-ANT-89	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

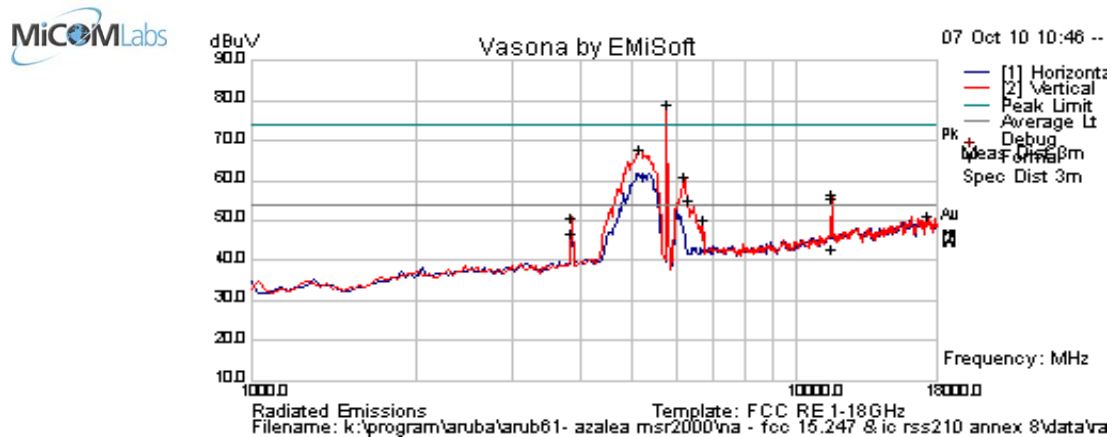

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
11569.829	50.1	6.8	-1.2	55.7	Peak Max	V	174	0	74.0	-18.3	Pass	RB
3856.663	57.3	3.8	-10.2	50.9	Peak Max	V	176	0	74.0	-23.1	Pass	RB
11569.829	37.4	6.8	-1.2	43.1	Average Max	V	174	0	54	-11.0	Pass	RB
3856.663	53.3	3.8	-10.2	47.0	Average Max	V	176	0	54	-7.0	Pass	RB
5769.539	82.8	4.8	-8.3	79.3	Peak [Scan]	V	--	--	--	--	n/a	Fund
5156.313	72.1	4.6	-9.0	67.8	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
6212.425	63.0	5.0	-7.0	60.9	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
11561.122	50.8	6.8	-1.2	56.5	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
6314.629	57.0	5.0	-6.8	55.2	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
17284.569	41.0	8.6	1.6	51.2	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
3861.723	57.1	3.8	-10.2	50.8	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
6723.447	50.8	5.2	-5.9	50.1	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 116 of 144

Test Freq.	5825 MHz	Engineer	SB
Variant	802.11a; 6.5 Mbs	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	20	Press. (mBars)	1003
Antenna	AP-ANT-89	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

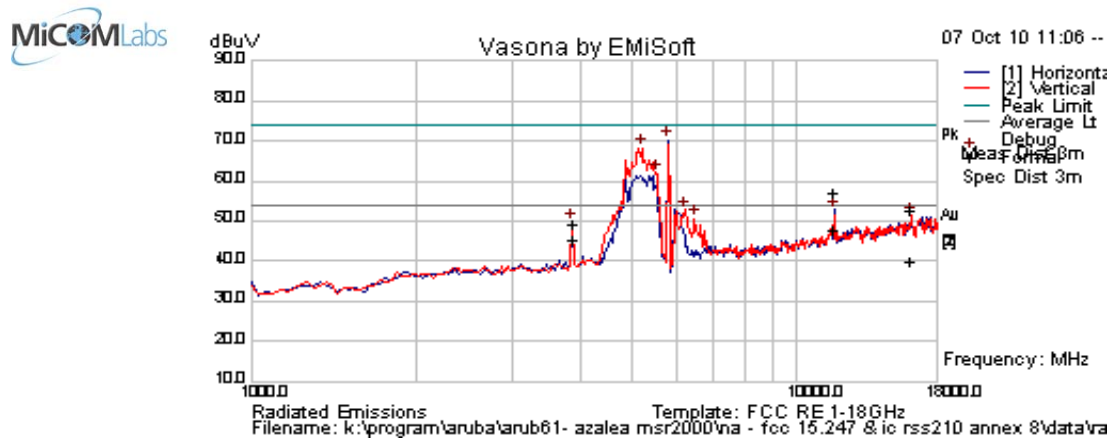

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
11649.925	52.0	6.8	-1.9	56.9	Peak Max	H	105	20	74.0	-17.1	Pass	RB
16151.744	42.8	9.0	1.1	52.8	Peak Max	V	157	0	74.0	-21.2	Pass	RB
3883.332	55.9	3.8	-10.4	49.3	Peak Max	V	99	361	74	-24.7	Pass	RB
11649.925	42.7	6.8	-1.9	47.6	Average Max	H	105	20	54	-6.4	Pass	RB
16151.744	30.1	9.0	1.1	40.1	Average Max	V	157	0	54	-13.9	Pass	RB
3883.332	51.9	3.8	-10.4	45.3	Average Max	V	99	361	54	-8.7	Pass	RB
5803.607	73.7	4.8	-8.3	70.2	Peak [Scan]	H	--	--	--	--	n/a	Fund
5190.381	72.8	4.6	-9.2	68.3	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
5531.062	65.8	4.6	-8.7	61.8	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
6246.493	54.5	5.0	-6.7	52.8	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
6484.970	52.0	5.1	-6.6	50.5	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 117 of 144

Test Freq.	5745 MHz	Engineer	SB
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	18	Press. (mBars)	1003
Antenna	AP-ANT-89	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

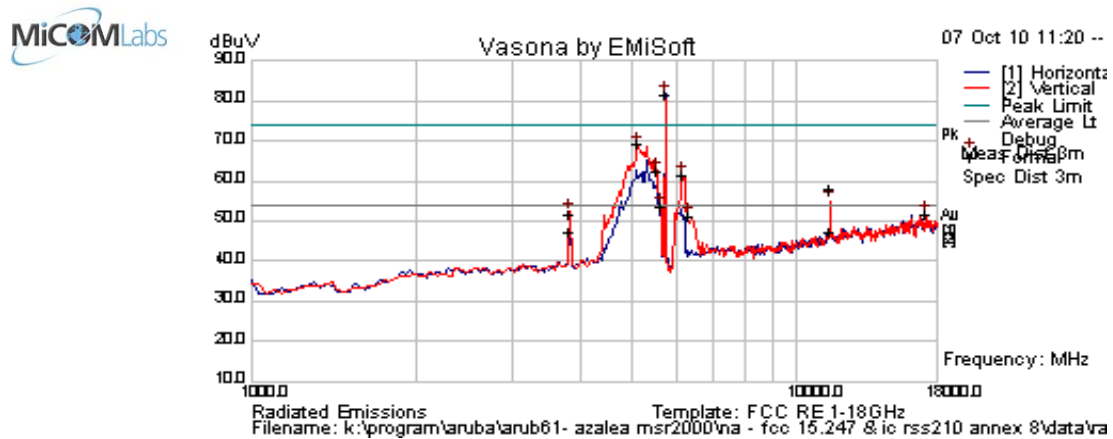

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
11490.010	52.5	6.8	-1.1	58.2	Peak Max	V	103	352	74.0	-15.8	Pass	RB
3830.02	57.8	3.8	-10.1	51.5	Peak Max	V	133	7	74.0	-22.5	Pass	RB
11490.010	41.6	6.8	-1.1	47.2	Average Max	V	103	352	54	-6.8	Pass	RB
3830.020	53.5	3.8	-10.1	47.2	Average Max	V	133	7	54	-6.8	Pass	RB
5735.471	85.2	4.8	-8.2	81.7	Peak [Scan]	H	--	--	--	--	n/a	Fund
5531.062	66.5	4.6	-8.7	62.5	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
6144.289	63.9	5.0	-7.3	61.5	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
5633.267	57.2	4.7	-8.4	53.5	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
17250.501	41.5	8.6	1.6	51.7	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
6314.629	53.0	5.0	-6.8	51.3	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 118 of 144

Test Freq.	5785 MHz	Engineer	SB
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	20	Press. (mBars)	1003
Antenna	AP-ANT-89	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

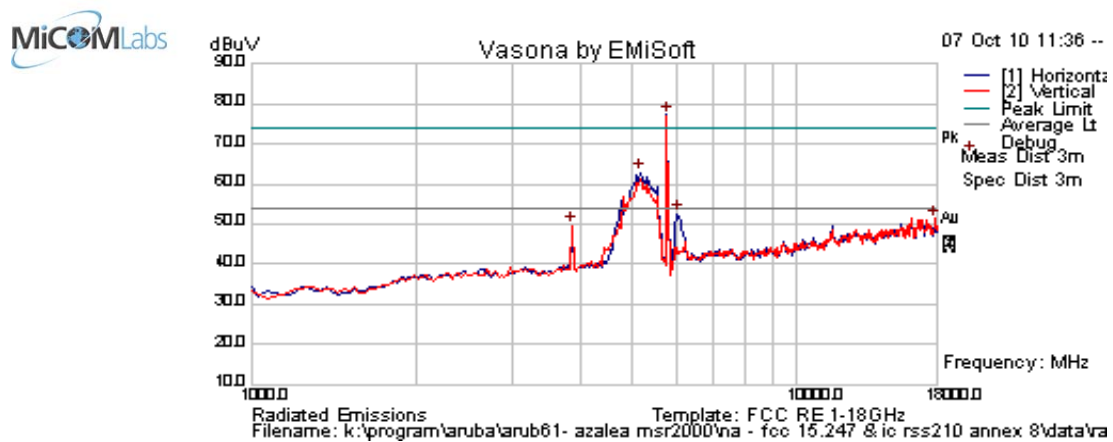

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
17842.966	42.7	8.8	0.6	52.1	Peak Max	V	138	7	74.0	-21.9	Pass	RB
3856.593	56.4	3.8	-10.2	50.0	Peak Max	V	196	0	74.0	-24.0	Pass	RB
17842.966	29.9	8.8	0.6	39.3	Average Max	V	138	7	54	-14.7	Pass	RB
3856.593	52.9	3.8	-10.2	46.5	Average Max	V	196	0	54	-7.5	Pass	RB
5769.539	80.8	4.8	-8.3	77.3	Peak [Scan]	H	--	--	--	--	n/a	Fund
6042.084	55.9	4.9	-8.2	52.6	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 119 of 144

Test Freq.	5825 MHz	Engineer	SB
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	20	Press. (mBars)	1003
Antenna	AP-ANT-89	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

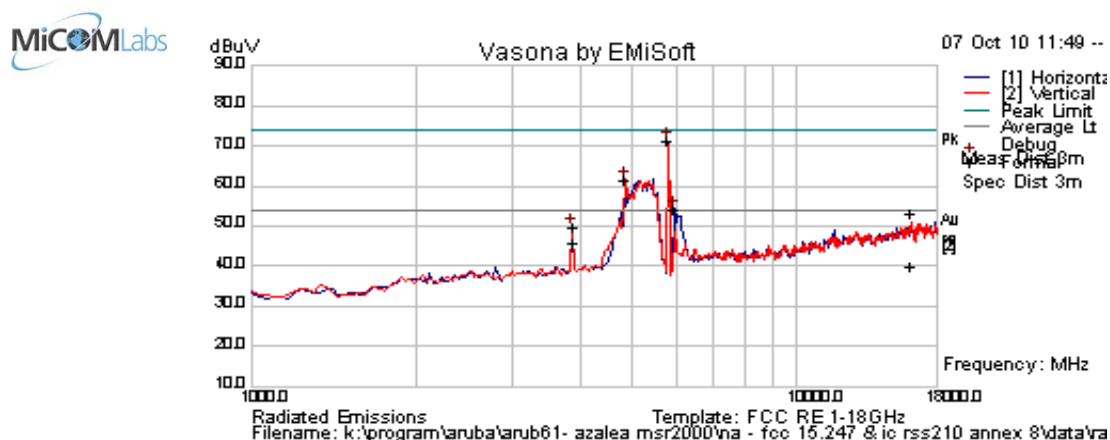

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
16131.984	43.2	9.0	0.9	53.1	Peak Max	V	168	23	74.0	-20.9	Pass	RB
3883.339	56.1	3.8	-10.4	49.6	Peak Max	V	201	0	74.0	-24.4	Pass	RB
16131.984	29.9	9.0	0.9	39.8	Average Max	V	168	23	54	-14.2	Pass	RB
3883.339	52.6	3.8	-10.4	46.0	Average Max	V	201	0	54	-8.0	Pass	RB
5803.607	74.7	4.8	-8.3	71.2	Peak [Scan]	H	--	--	--	--	n/a	Fund
5939.880	57.8	4.9	-8.4	54.3	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
Legend:		TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission										
		RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak										

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 120 of 144

Test Freq.	5755 MHz	Engineer	SB
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	18	Press. (mBars)	1003
Antenna	AP-ANT-89	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

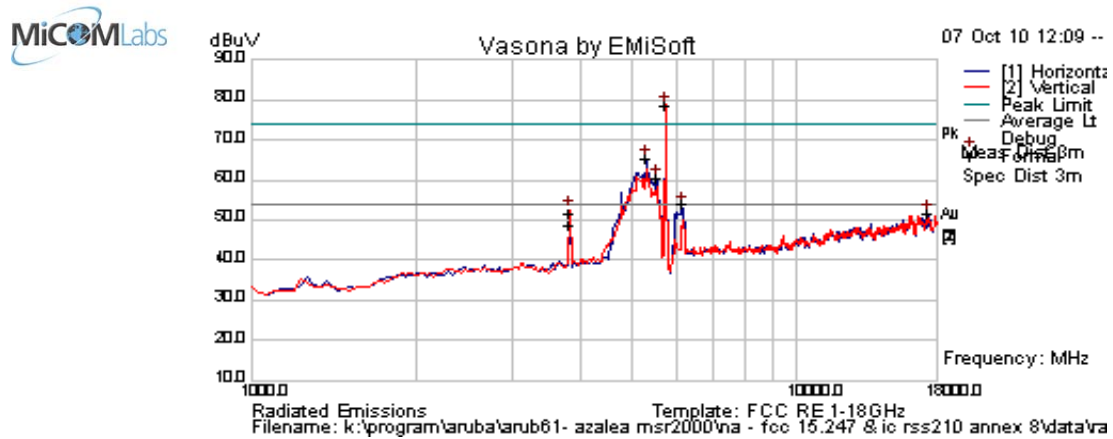

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
3836.658	57.9	3.8	-10.2	51.5	Peak Max	V	197	361	74.0	-22.5	Pass	RB
3836.658	55.2	3.8	-10.2	48.8	Average Max	V	197	361	54.0	-5.2	Pass	RB
5735.471	82.3	4.8	-8.2	78.8	Peak [Scan]	V	--	--	--	--	n/a	Fund
5292.585	70.2	4.6	-9.5	65.3	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
5531.062	64.4	4.6	-8.7	60.4	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
6144.289	56.3	5.0	-7.3	53.9	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
17318.637	41.2	8.7	1.7	51.6	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 121 of 144

Test Freq.	5785 MHz	Engineer	SB
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	20	Press. (mBars)	1003
Antenna	AP-ANT-89	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

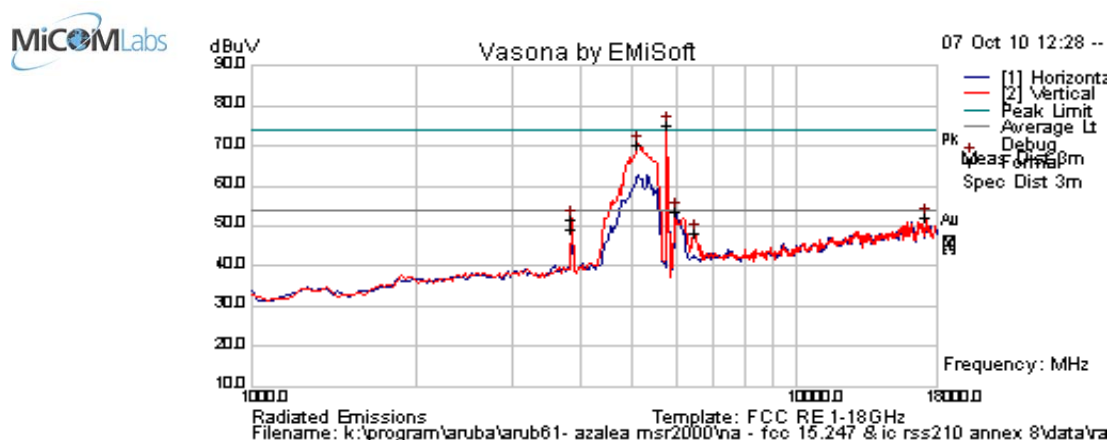

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
3856.653	58.3	3.8	-10.2	51.9	Peak Max	V	148	0	74.0	-22.1	Pass	RB
3856.653	55.7	3.8	-10.2	49.3	Average Max	V	148	0	54.0	-4.7	Pass	RB
5769.539	78.8	4.8	-8.3	75.3	Peak [Scan]	V	--	--	--	--	n/a	Fund
6008.016	57.1	4.9	-8.3	53.7	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
17250.501	41.8	8.6	1.6	52.0	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
6484.970	50.0	5.1	-6.6	48.5	Peak [Scan]	V	> 20dB below fundamental				Pass	NRB
Legend:		TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission										
		RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak										

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 122 of 144

Test Freq.	5815 MHz	Engineer	SB
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	20	Press. (mBars)	1003
Antenna	AP-ANT-89	Duty Cycle (%)	100
Test Notes 1	Fundamental attenuated by band-stop filter.		
Test Notes 2			

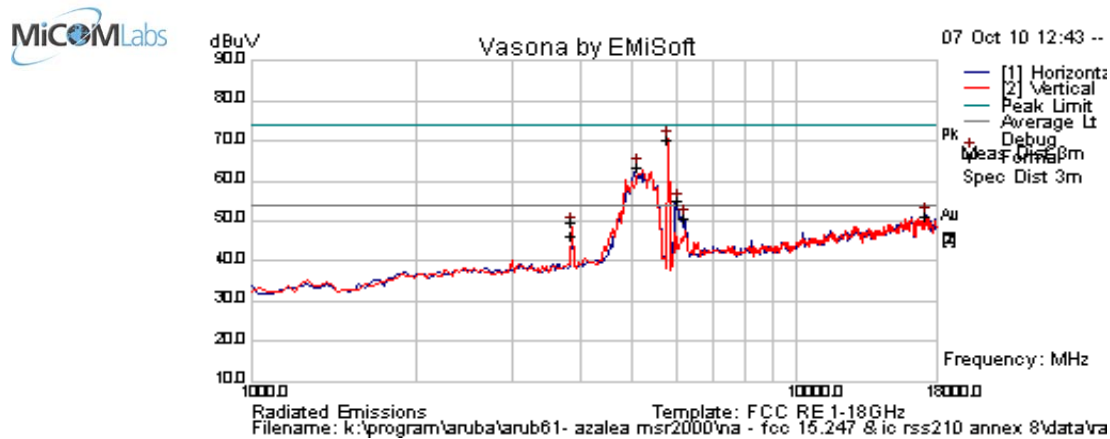

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
3876.623	56.2	3.8	-10.3	49.8	Peak Max	V	195	0	74.0	-24.2	Pass	RB
3876.623	52.6	3.8	-10.3	46.2	Average Max	V	195	0	54.0	-7.8	Pass	RB
5803.607	73.9	4.8	-8.3	70.4	Peak [Scan]	V	--	--	--	--	n/a	Fund
6042.084	58.2	4.9	-8.2	54.9	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
17250.501	41.1	8.6	1.6	51.3	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
6212.425	52.6	5.0	-7.0	50.5	Peak [Scan]	H	> 20dB below fundamental				Pass	NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 123 of 144

7.3.14 AP-ANT-89 5.8GHz - Transmitter Band Edge Emissions

BE 5.35-5.46 GHz 802.11a 5745 MHz

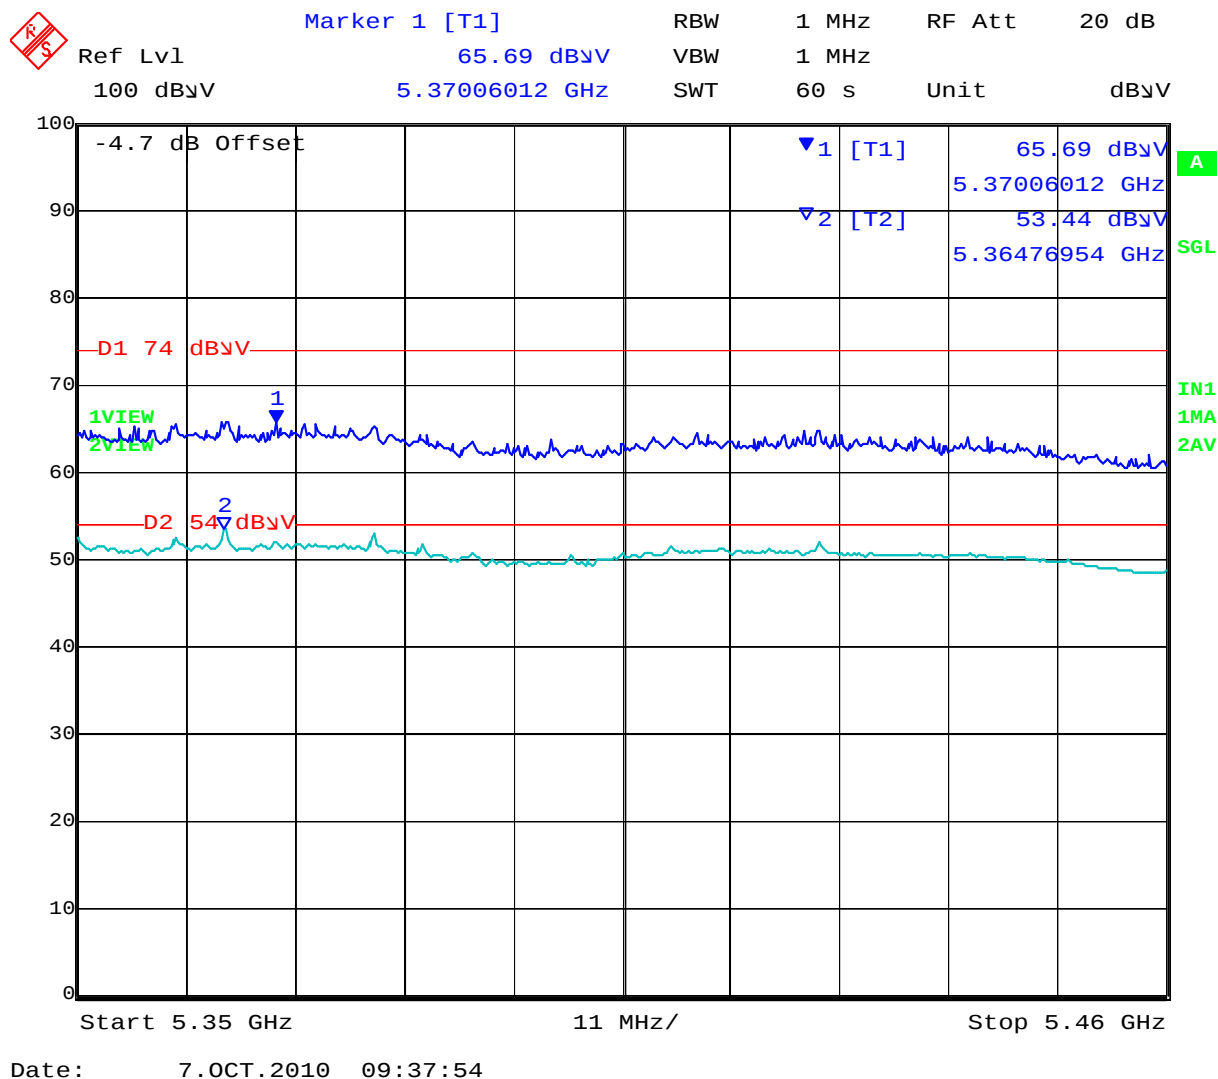


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 124 of 144

BE 5.35-5.46 GHz 802.11n HT20 5745 MHz

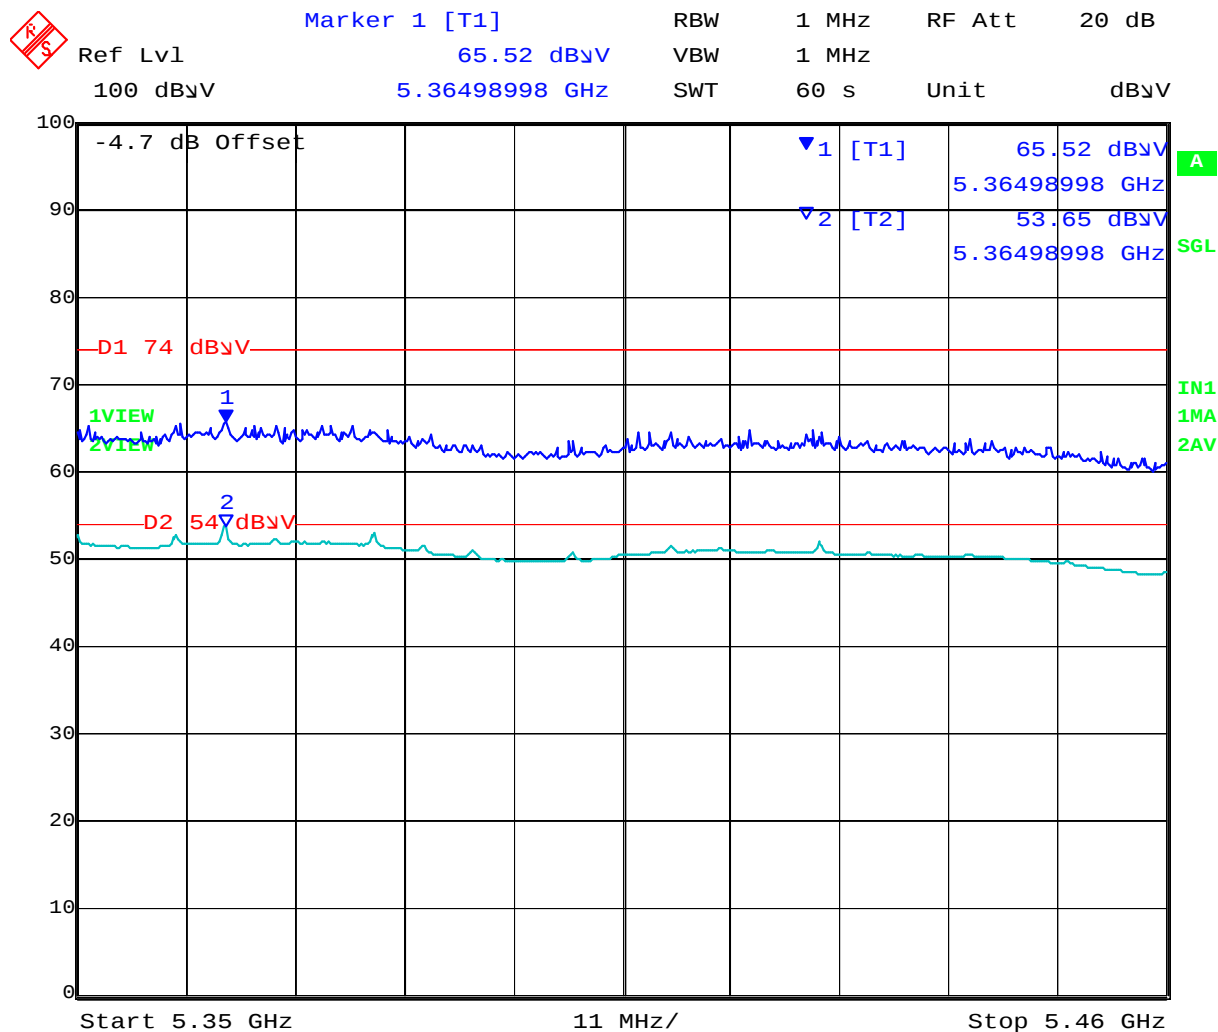


Date: 7.OCT.2010 09:41:23

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 125 of 144

BE 5.35-5.46 GHz 802.11n HT40 5755 MHz

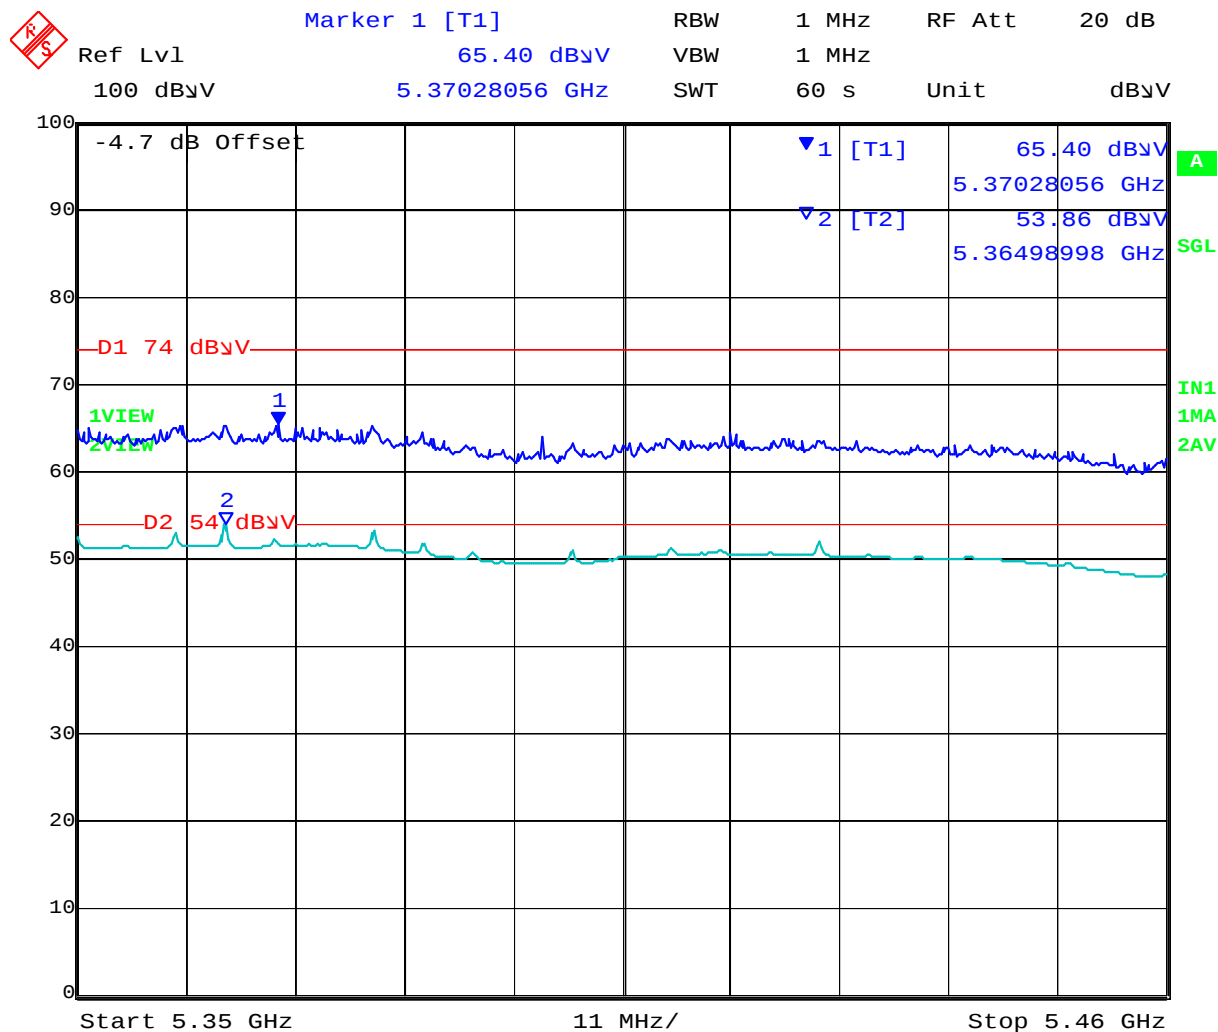

Date: 7.OCT.2010 09:46:02


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 126 of 144

7.3.15 AP-ANT-89 5.8GHz - Transmitter Peak Emissions

Test Freq.	5745 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	25
Freq. Range	5725 - 5850 MHz	Rel. Hum.(%)	32
Power Setting	18	Press. (mBars)	1003
Antenna	AP-ANT-89	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

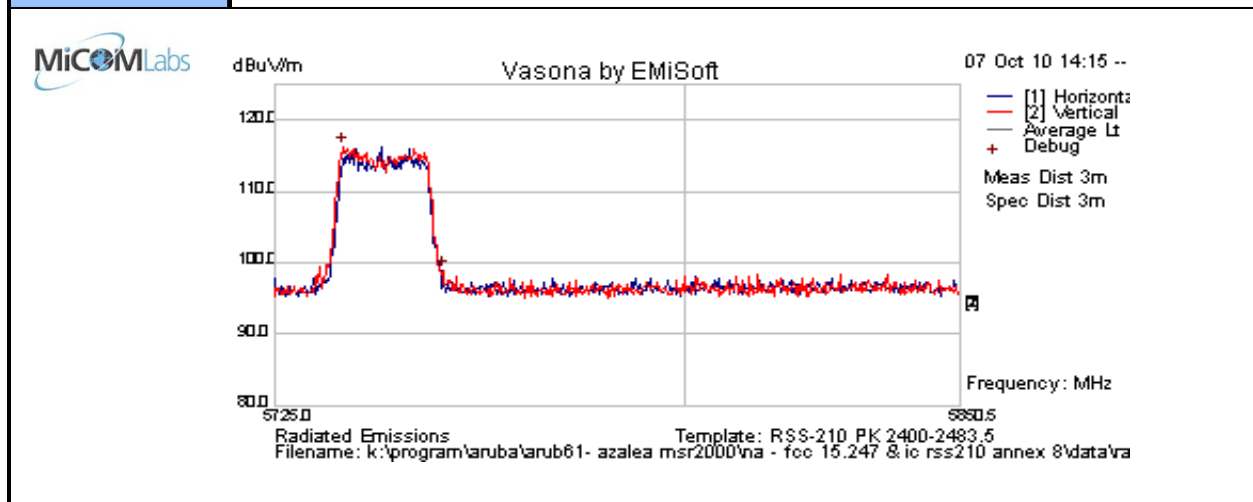

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5737.575	66.6	14.8	35.0	116.3	Peak [Scan]	V						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 127 of 144

Test Freq.	5785 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	25
Freq. Range	5725 - 5850 MHz	Rel. Hum.(%)	32
Power Setting	20	Press. (mBars)	1003
Antenna	AP-ANT-89	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

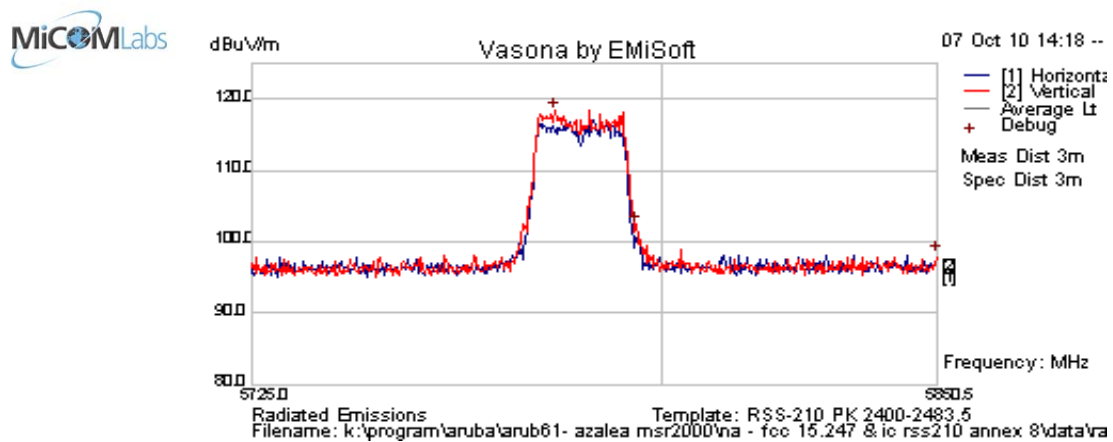

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5780.331	68.7	14.8	35.0	118.5	Peak [Scan]	V						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 128 of 144

Test Freq.	5825 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	25
Freq. Range	5725 - 5850 MHz	Rel. Hum.(%)	32
Power Setting	20	Press. (mBars)	1003
Antenna	AP-ANT-89	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

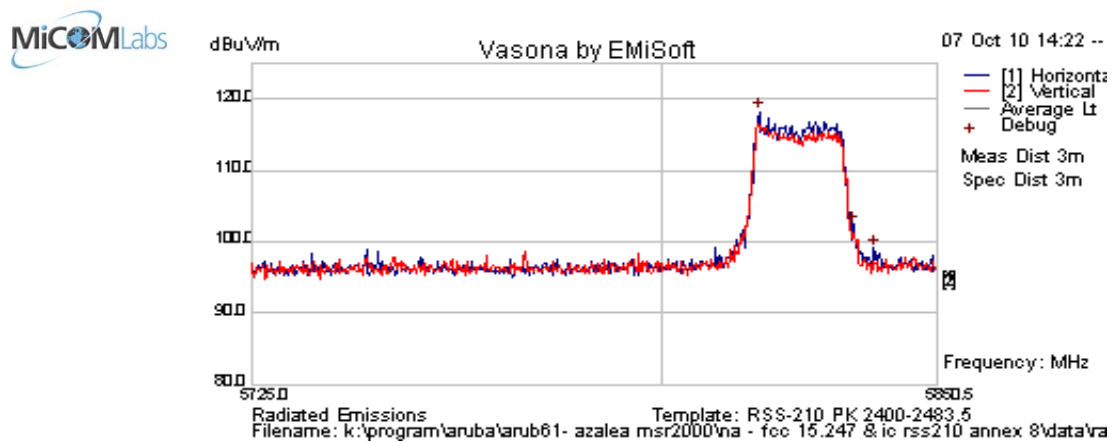

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5817.805	68.5	14.8	35.0	118.3	Peak [Scan]	H						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 129 of 144

Test Freq.	5745 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	25
Freq. Range	5725 - 5850 MHz	Rel. Hum.(%)	32
Power Setting	18	Press. (mBars)	1003
Antenna	AP-ANT-89	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

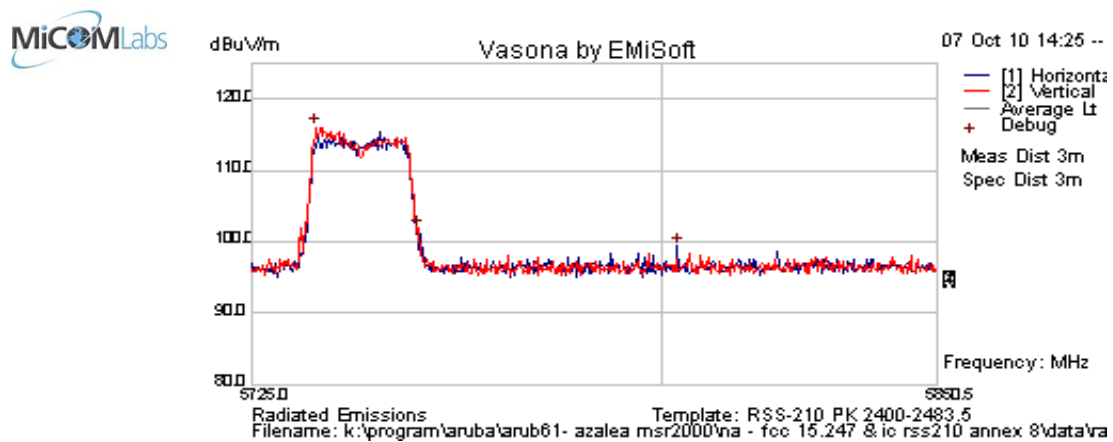

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5736.821	66.4	14.8	35.0	116.1	Peak [Scan]	V						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 130 of 144

Test Freq.	5785 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	25
Freq. Range	5725 - 5850 MHz	Rel. Hum.(%)	32
Power Setting	20	Press. (mBars)	1003
Antenna	AP-ANT-89	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

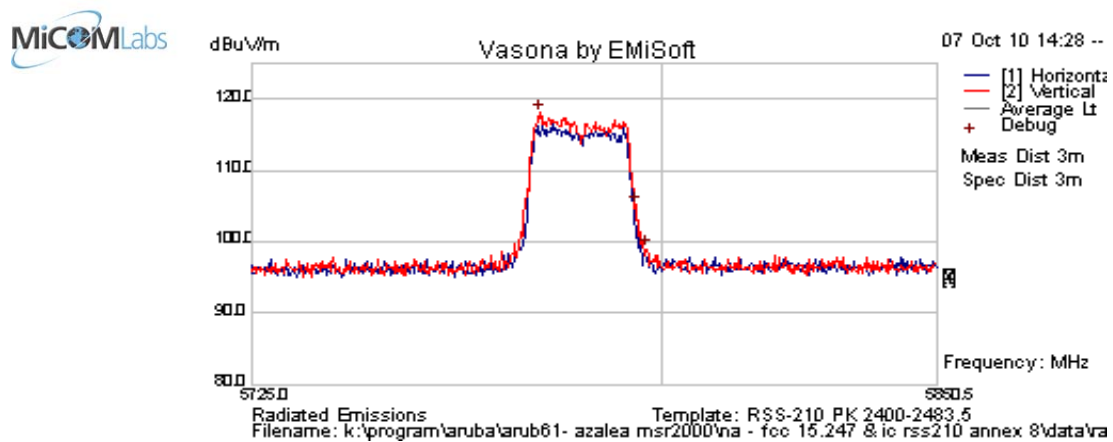

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5777.564	68.4	14.8	35.0	118.2	Peak [Scan]	V						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 131 of 144

Test Freq.	5825 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	25
Freq. Range	5725 - 5850 MHz	Rel. Hum.(%)	32
Power Setting	20	Press. (mBars)	1003
Antenna	AP-ANT-89	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

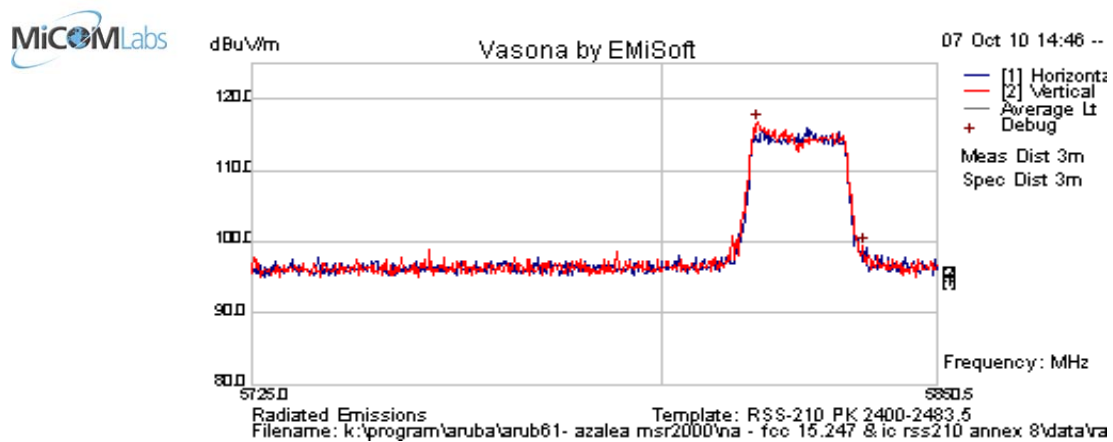

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5817.553	66.9	14.8	35.0	116.7	Peak [Scan]	V						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 132 of 144

Test Freq.	5755 MHz	Engineer	SB
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	25
Freq. Range	5725 - 5850 MHz	Rel. Hum.(%)	32
Power Setting	18	Press. (mBars)	1003
Antenna	AP-ANT-89	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

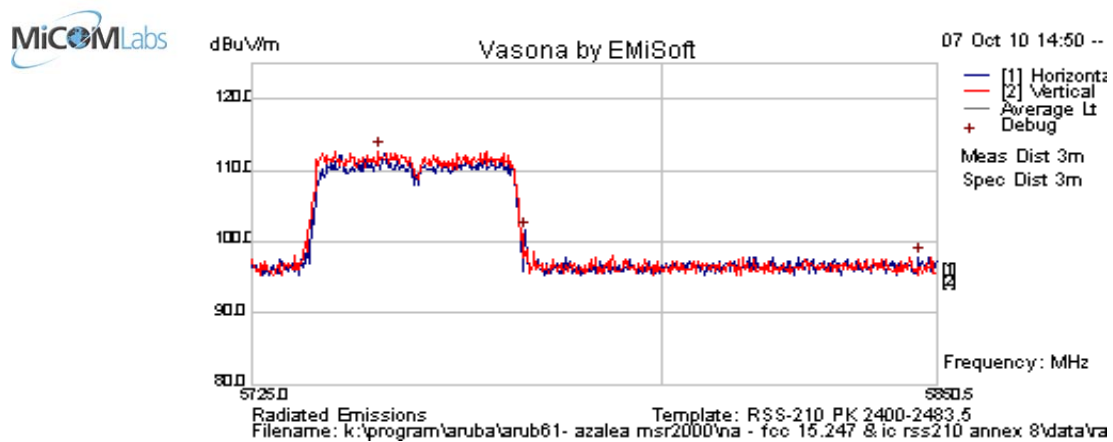

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5748.138	63.0	14.8	35.0	112.8	Peak [Scan]	V						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 133 of 144

Test Freq.	5785 MHz	Engineer	SB
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	25
Freq. Range	5725 - 5850 MHz	Rel. Hum.(%)	32
Power Setting	20	Press. (mBars)	1003
Antenna	AP-ANT-89	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

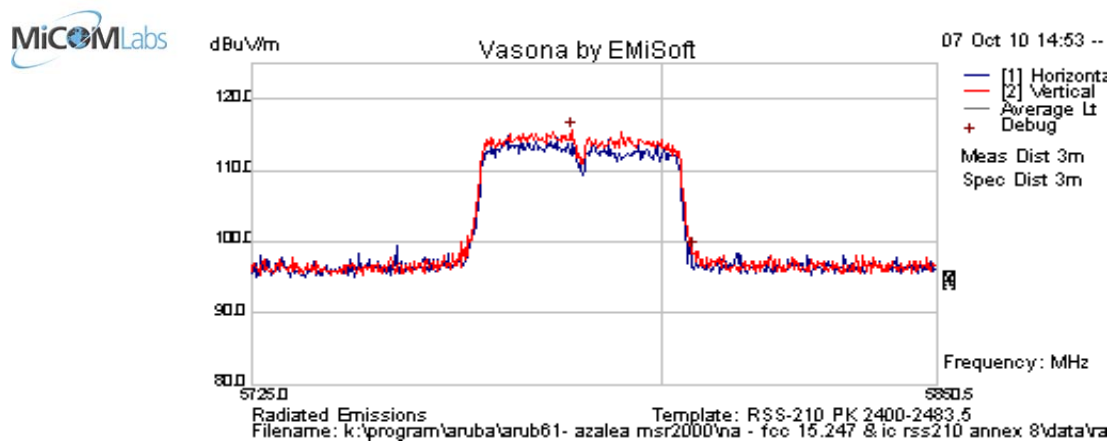

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5783.349	65.9	14.8	35.0	115.6	Peak [Scan]	V						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 134 of 144

Test Freq.	5815 MHz	Engineer	SB
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	25
Freq. Range	5725 - 5850 MHz	Rel. Hum.(%)	32
Power Setting	20	Press. (mBars)	1003
Antenna	AP-ANT-89	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

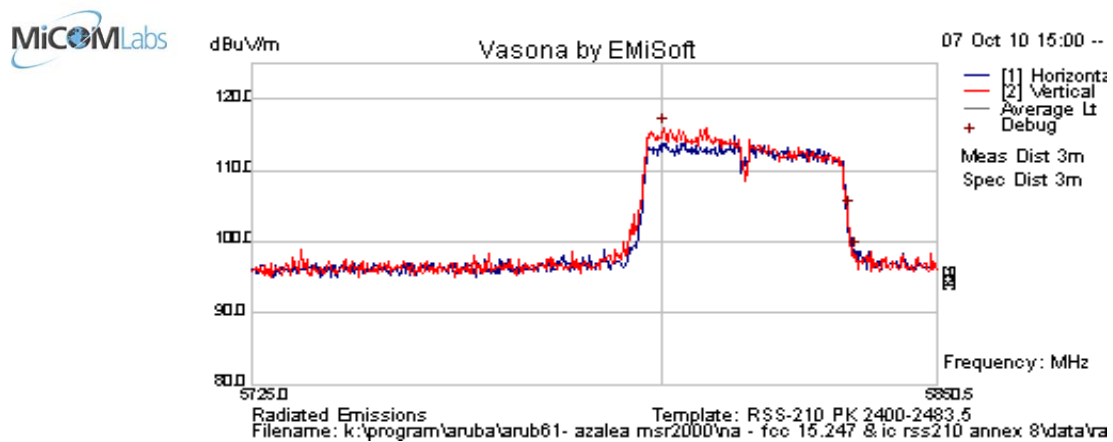

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5800.199	66.3	14.8	35.0	116.1	Peak [Scan]	V						PK
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission PK = Peak emissions of Fundamental												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 135 of 144

7.3.16 AP-ANT-89 5.8GHz - Receiver Emissions

Test Freq.	5785 MHz	Engineer	SB
Variant	Receive in Test Utility	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	Not Applicable in Receive Mode	Press. (mBars)	1003
Antenna	AP-ANT-89		
Test Notes 1			
Test Notes 2			

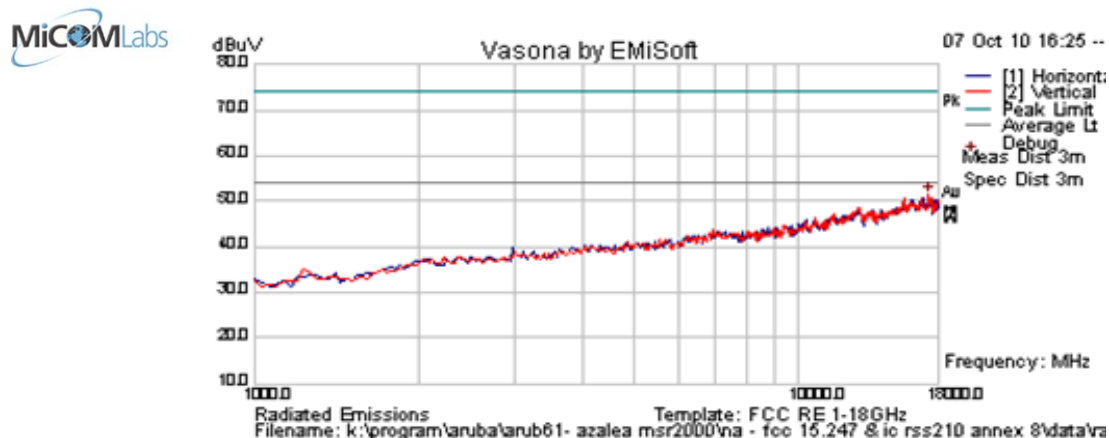

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
No Receiver Emissions within 6dB of limit.												
Legend: TRANS = Transient Emission; RB = Restricted Band; NRB = Non-Restricted Band;												
BE = Emission in Restricted Band Nearest Transmission Band Edge; FUND = Fundamental Freq.												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 136 of 144

7.4 Radiated Spurious Emissions – Digital Apparatus

Standard Reference


FCC, Part 15 Subpart B §15.109
Industry Canada ICES-003 §5

Test Procedure

Testing was performed in a 3-meter anechoic chamber. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. Preliminary emissions were recorded with in Spectrum Analyzer mode, using a maximum peak detector while in peak hold mode.

Emissions nearest the limits were chosen for maximization and formal measurement using a CISPR Compliant receiver. Emissions from 30 MHz – 1000 MHz are measured utilizing a CISPR compliant quasi-peak detector with a tuned receiver, using a bandwidth of 120 kHz. Emissions above 1000 MHz are measured utilizing a CISPR compliant average detector with a tuned receiver, using a bandwidth of 1 MHz. Only the highest emissions relative to the limit are listed.

Test Measurement Set up

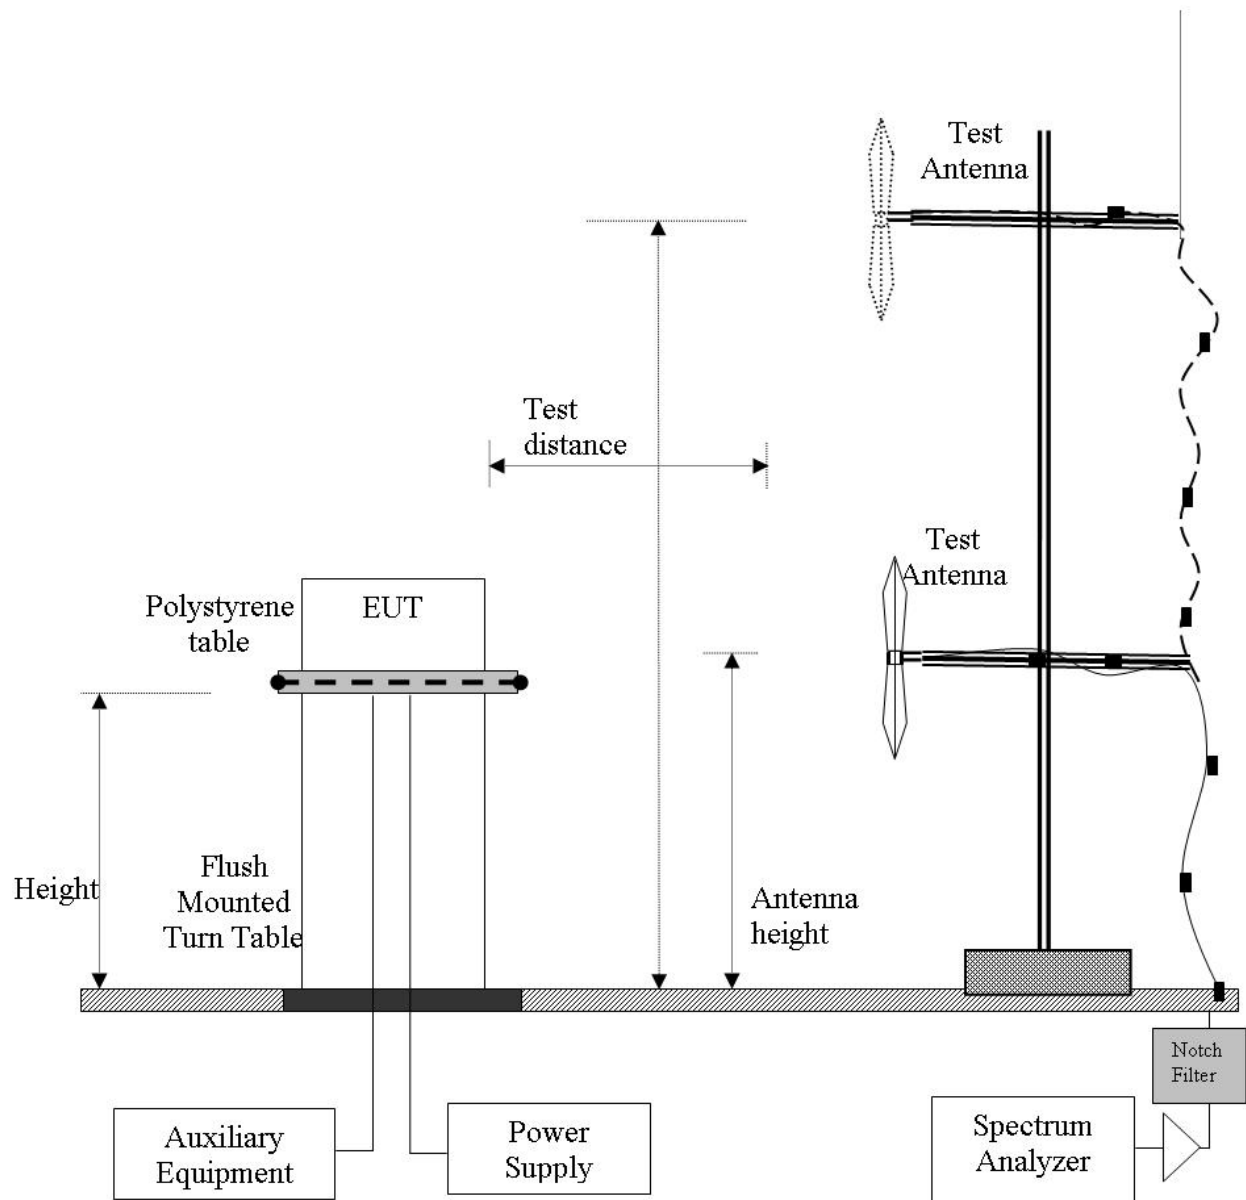

Measurement set up for Radiated Emission Test



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 138 of 144

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

$$CORR = \text{Correction Factor} = CL - AG + NFL$$

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

Field Strength Calculation Example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 139 of 144

Specification

Radiated Spurious Emissions – Digital Apparatus

FCC, Part 15 Subpart B §15.109

A representative type or model of each digital apparatus shall be tested in accordance with the measurement methods described in FCC Part 15; Subpart A - General and FCC Subpart B – Unintentional Radiators.

Industry Canada ICES-003

A representative type or model of each digital apparatus shall be tested in accordance with the measurement method described in the publication referred to in Section 7.1 [Canadian Standards Association Standard CAN/CSA-CEI/IEC CISPR 22:02, "Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment."].

FCC, Part 15 Subpart B §15.109 Spurious Emissions Limits

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values.

Frequency (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Field Strength of radiated emissions for a Class A digital device are as follows.

Frequency (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance (meters)
30-88	100	49.5	3
88-216	150	54.0	3
216-960	200	57.0	3
Above 960	500	60.0	3

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 140 of 144

RSS-ICES §5 Spurious Emissions Limits

Class A Digital Device: The field intensity of radio noise emissions that are radiated from a Class A digital apparatus shall not exceed the limits specified in Table 5 of the publication referred to in Section 7.1, within the indicated frequency range.

Frequency range MHz	Quasi-peak limits dB(μV/m) @ 10m	Quasi-peak limits dB(μV/m) @ 3m
30 to 230	40	50.5
230 to 1 000	47	57.5
NOTE 1	The lower limit shall apply at the transition frequency.	
NOTE 2	Additional provisions may be required for cases where interference occurs	

Class B Digital Device: The field intensity of radio noise emissions that are radiated from a Class B digital apparatus shall not exceed the limits specified in Table 6 of the publication referred to in Section 7.1, within the indicated frequency range.

Frequency range MHz	Quasi-peak limits dB(μV/m) @ 10m	Quasi-peak limits dB(μV/m) @ 3m
30 to 230	30	40.5
230 to 1 000	37	47.5
NOTE 1	The lower limit shall apply at the transition frequency.	
NOTE 2	Additional provisions may be required for cases where interference occurs	

Laboratory Measurement Uncertainty for Spectrum Measurement

Measurement Uncertainty	+5.6/ -4.5 dB
--------------------------------	---------------

Traceability

Method	Test Equipment Used
Work instruction WI-03	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 141 of 144

7.4.1 Measurement Results for Radiated Digital Apparatus

Test Freq.	2437 MHz	Engineer	CSB
Variant	Digital Emissions	Temp (°C)	26.5
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	32
Power Setting	Not Applicable for Digital Emissions	Press. (mBars)	999
Antenna	1 meter cable terminated with 50 Ohm loads		
Test Notes 1	EUT placed in Receive mode for Digital Emissions testing		
Test Notes 2	Shielded Ethernet cable; Linear POE supply		

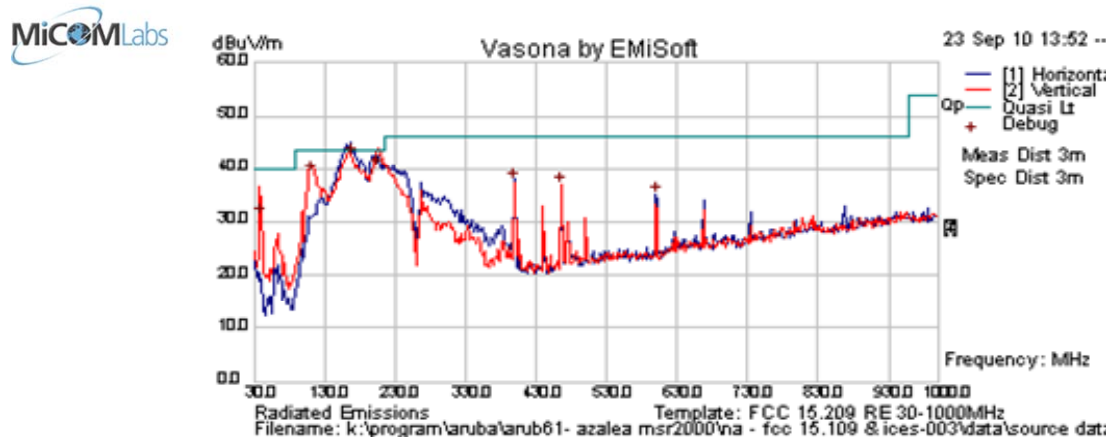

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
167.840	56.7	4.6	-18.8	42.5	Quasi Peak	H	205	258	43.5	-1.0	Pass	
205.559	54.7	4.8	-19.3	40.2	Quasi Peak	V	98	254	43.5	-3.3	Pass	
110.333	52.9	4.2	-18.2	38.9	Quasi Peak	V	102	112	43.5	-4.6	Pass	
38.946	43.7	3.6	-16.2	31.1	Quasi Peak	V	113	55	40	-9.0	Pass	
399.406	46.3	5.7	-14.5	37.5	Peak [Scan]	V	113	55	46	-8.5	Pass	
600.424	39.8	6.4	-11.3	34.8	Peak [Scan]	V	113	55	46	-11.2	Pass	
465.680	44.0	5.9	-13.0	36.8	Peak [Scan]	V	113	55	46	-9.2	Pass	
Legend: DIG = Digital Device Emission; RX = Receiver Emissions; FUND = Fundamental Frequency												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 142 of 144

Test Freq.	2437 MHz	Engineer	CSB
Variant	Digital Emissions	Temp (°C)	26.5
Freq. Range	1000 MHz - 6000 MHz	Rel. Hum.(%)	33
Power Setting	Not Applicable for Digital Emissions	Press. (mBars)	1000
Antenna	1 meter cable terminated with 50 Ohm loads		
Test Notes 1	EUT placed in Receive mode for Digital Emissions testing		
Test Notes 2	Shielded Ethernet cable; Linear POE supply		

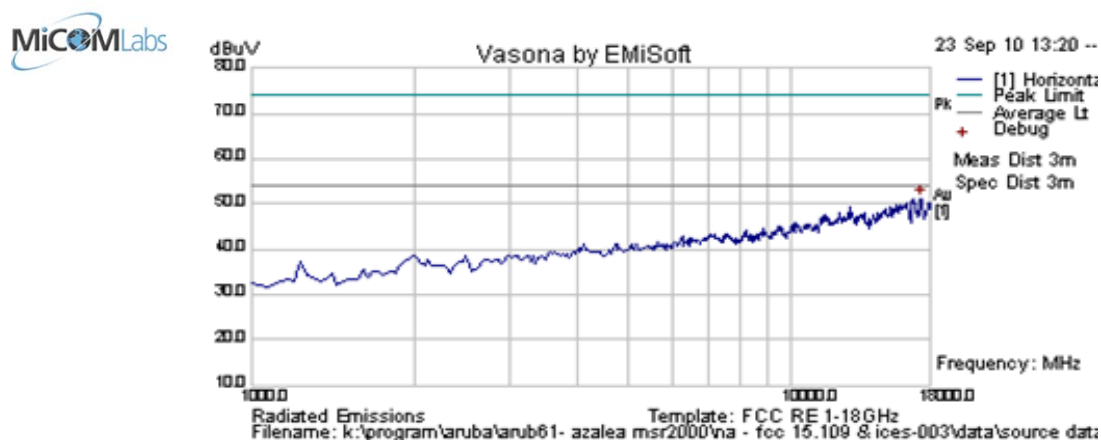

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
No receiver emissions above 1 GHz.												
Legend: DIG = Digital Device Emission; RX = Receiver Emissions; FUND = Fundamental Frequency												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: AP-175P / MSR2K23N0-XX 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB61-U1 Rev A
Issue Date: 1st November 2010
Page: Page 143 of 144

8 TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Serial #
0134	Amplifier	Com Power	PA 122	181910
0158	Barometer /Thermometer	Control Co.	4196	E2846
0287	EMI Receiver	Rhode & Schwartz	ESIB 40	100201
0252	SMA Cable	Megaphase	Sucoflex 104	None
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181-3G0300	209092-001
0313	Coupler	Hewlett Packard	86205A	3140A01285
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623
0070	Power Meter	Hewlett Packard	437B	3125U11552
0116	Power Sensor	Hewlett Packard	8485A	3318A19694
0117	Power Sensor	Hewlett Packard	8487D	3318A00371
0184	Pulse Limiter	Rhode & Schwartz	ESH3Z2	357.8810.52
0190	LISN	Rhode & Schwartz	ESH3Z5	836679/006
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001
0301	5.6 GHz Notch Filter	Micro-Tronics	RBC50704	001
0302	5.25 GHz Notch Filter	Micro-Tronics	BRC50703	002
0303	5.8 GHz Notch Filter	Micro-Tronics	BRC50705	003
0304	2.4GHzHz Notch Filter	Micro-Tronics	--	001
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002
0335	1-18GHz Horn Antenna	ETS- Lindgren	3117	00066580
0337	Amplifier	MiCOM Labs	--	--
0338	Antenna	Sunol Sciences	JB-3	A052907

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200
Pleasanton, CA 94566, USA
Tel: 1.925.462.0304
Fax: 1.925.462.0306
www.micomlabs.com