



6.2.5. In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period
FCC §15.407(h)(2)(iii)

The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the EUT (Master). The requisite MPEG video file ("TestFile.mpg" available on the NTIA website at the following link <http://ntiacsd.ntia.doc.gov/dfs/>) is streamed from the master device (AP) to the client.

Channel Closing Transmission Time - Measurement

A Type 1 waveform was introduced to the EUT, from which a 12 second transmission record was digitally captured, collecting nearly 250M samples of data, which included in excess of 600 ms of pre-trigger data. This Type 1 waveform had an integral marker built into its construction, marking the start of the radar waveform play, which directly triggered the PXI digitizer's data capture via the PXI backplane trigger bus.

The test system was set-up to capture all transmission data for access point events above a threshold level of -50 dBm. The test equipment time stamps all captured events with respect to T_0 (zero time indicating the start of the measurements sequence) starting the 612.1 ms pre-trigger period followed by the radar type 1 burst period.

Radar (Type 1) Pre-trigger period 612.1 ms

Type 1 burst period 25.704 ms

(The period of the 18 pulse burst includes [18 pulses * 1.428mS PRI] = 25.704 ms. Then add 1 μ s pulse width for the final pulse.)

Channel Closing Transmission Time starts immediately after the last radar pulse is transmitted i.e. 637.8 ms after the start of the trace capture period.




Title: Aruba AP-92/93 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB89-U2 Rev A
Issue Date: 2nd September 2011
Page: 223 of 242

Therefore, pulses seen after this 637.8 ms boundary are identified and totaled to provide an aggregate total of transmissions in order to determine whether the EUT is compliant with the Channel Closing Transmission Time requirements as described in MO&O FCC 06-96. In this case, it was found that an aggregate total of 0.190 ms of transmission time accrued. This value is found at the right hand side at the foot of the following plot (10s Total).

Channel Closing Transmission Time (802.11a) = 0.313 mSecs (limit 260 mSecs)

Channel Move Time (802.11a) = 0.199 Secs (limit 10 Secs)

**Channel Move Time, Channel Closing Transmission Time for Type 1 Radar
Captured by the Test System - 0 to 2 seconds (5500 MHz 11a mode)**

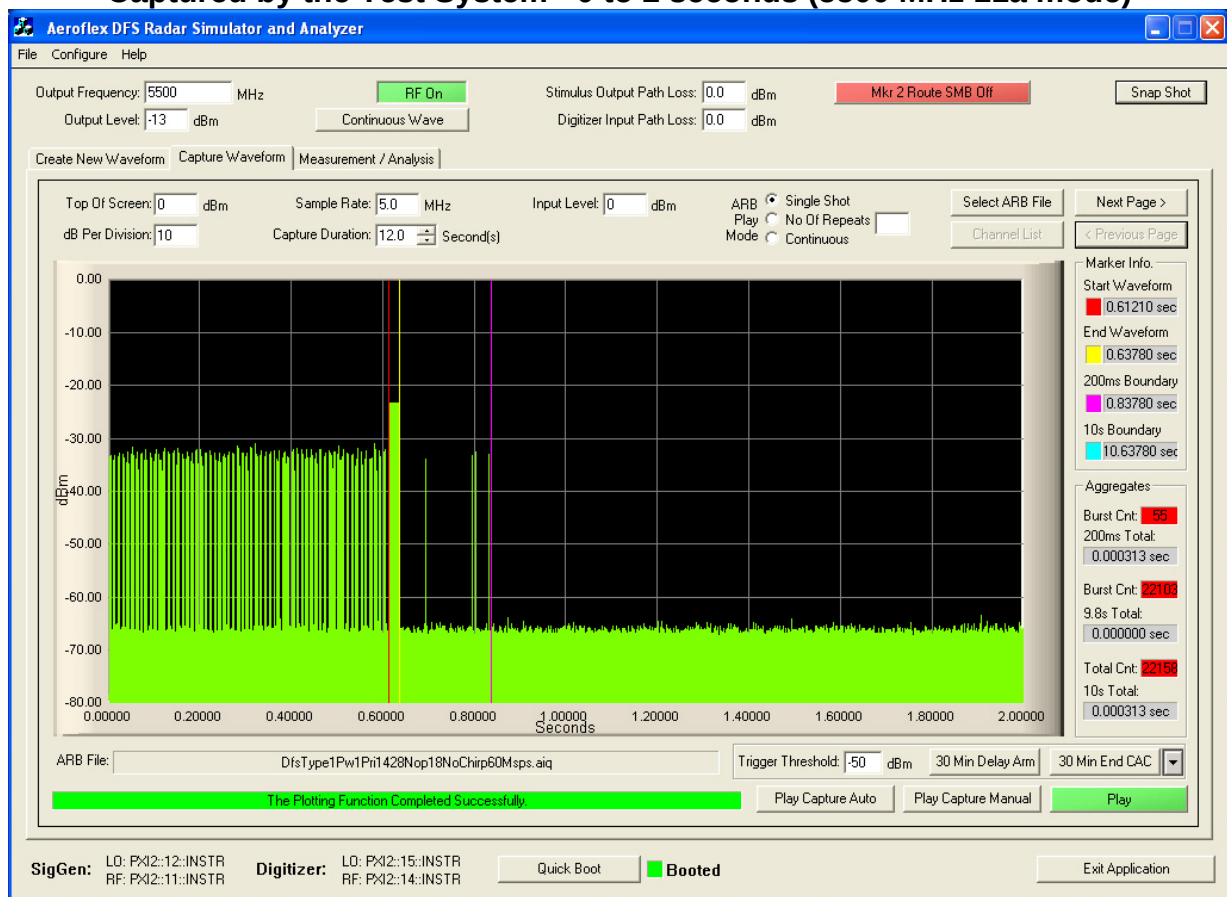


From the plot above it can be seen that the transmission activity within the 200 mS window is 0.313 mS (see 200 mS Total). From the following plots which shows all additional activity within the remainder of the 10 sec measurement window it can be determined that the aggregate transmission is 0.000 mS. This is less than the 60 mS limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-92/93 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB89-U2 Rev A
Issue Date: 2nd September 2011
Page: 224 of 242

Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 2 to 4 seconds(5500 MHz 11a mode)

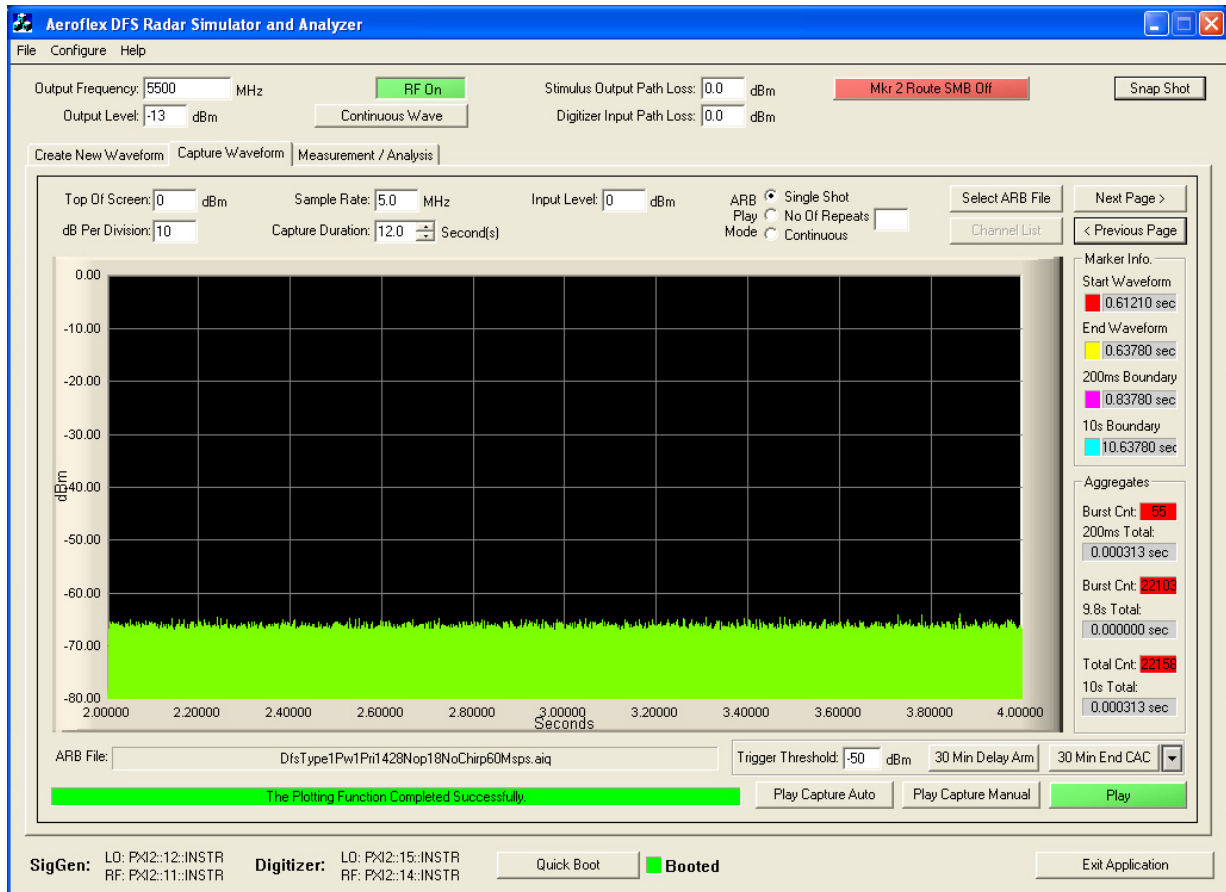


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-92/93 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB89-U2 Rev A
Issue Date: 2nd September 2011
Page: 225 of 242

Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 4 to 6 seconds(5500 MHz 11a mode)

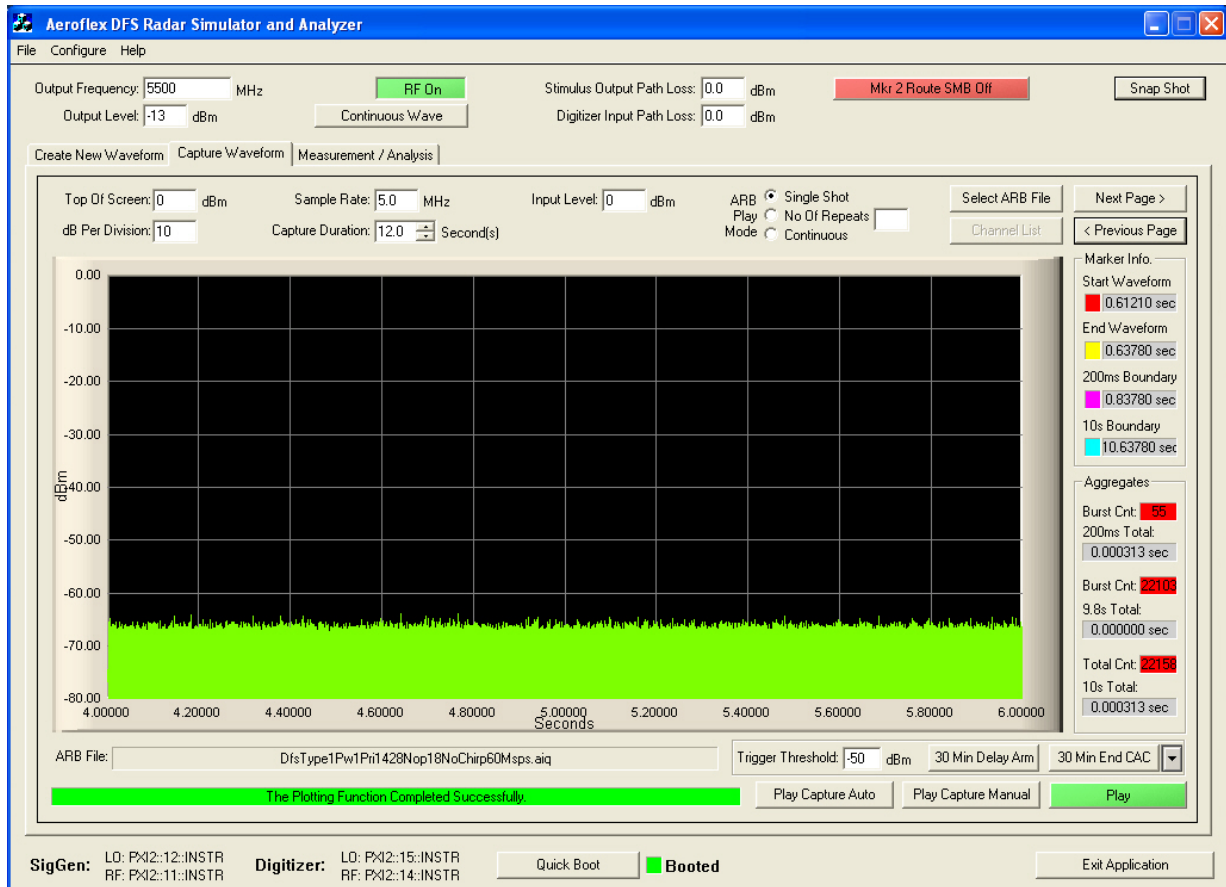


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-92/93 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB89-U2 Rev A
Issue Date: 2nd September 2011
Page: 226 of 242

Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 6 to 8 seconds(5500 MHz 11a mode)

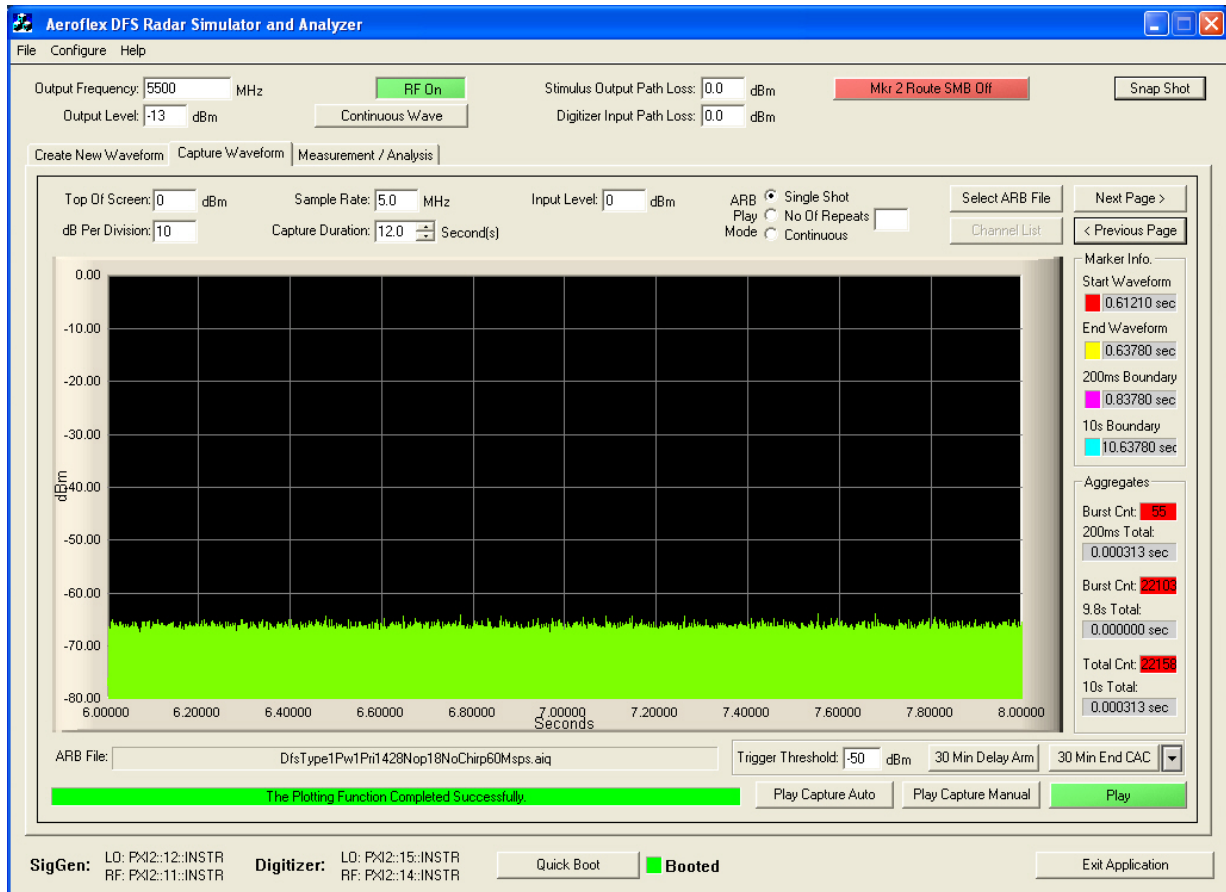


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-92/93 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB89-U2 Rev A
Issue Date: 2nd September 2011
Page: 227 of 242

Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 8 to 10 seconds(5500 MHz 11a mode)

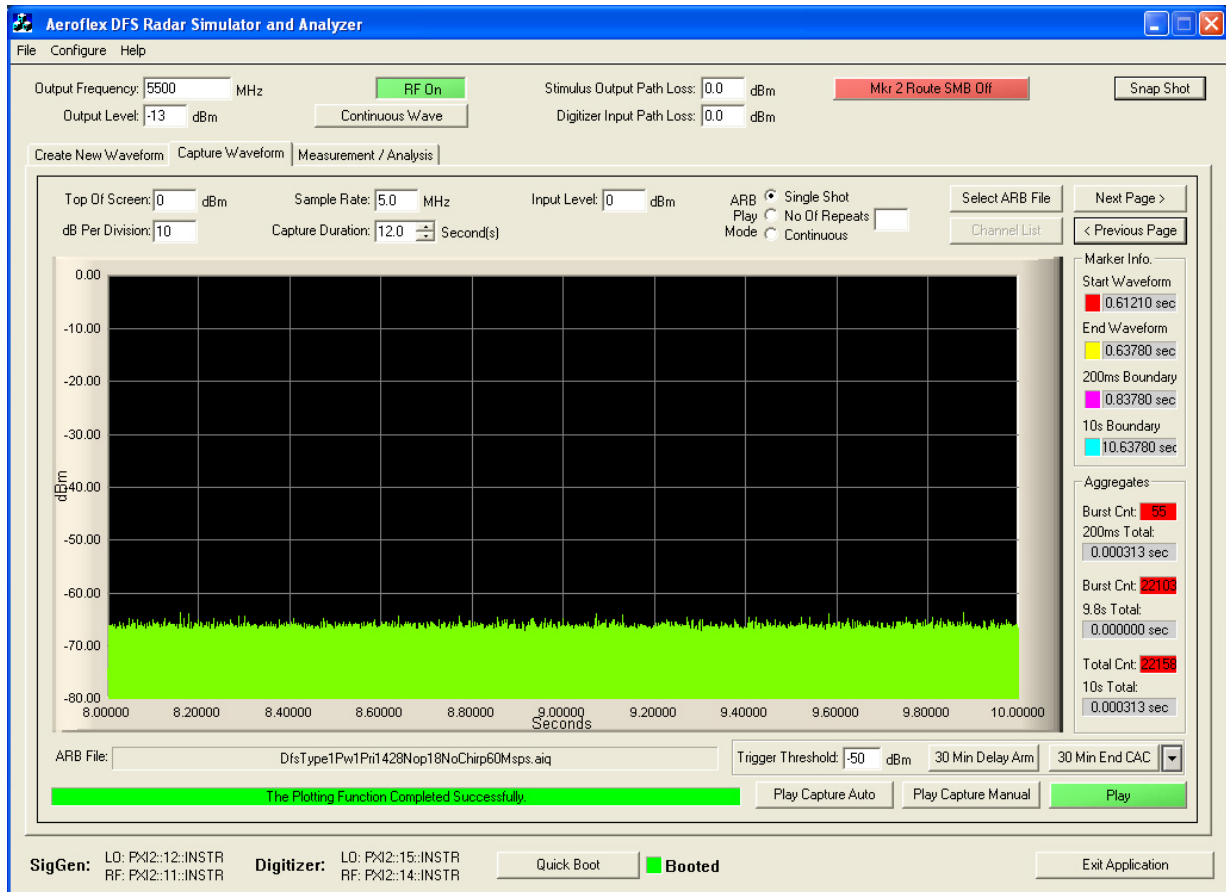


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-92/93 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB89-U2 Rev A
Issue Date: 2nd September 2011
Page: 228 of 242

Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 10 to 12 seconds(5500 MHz 11a mode)

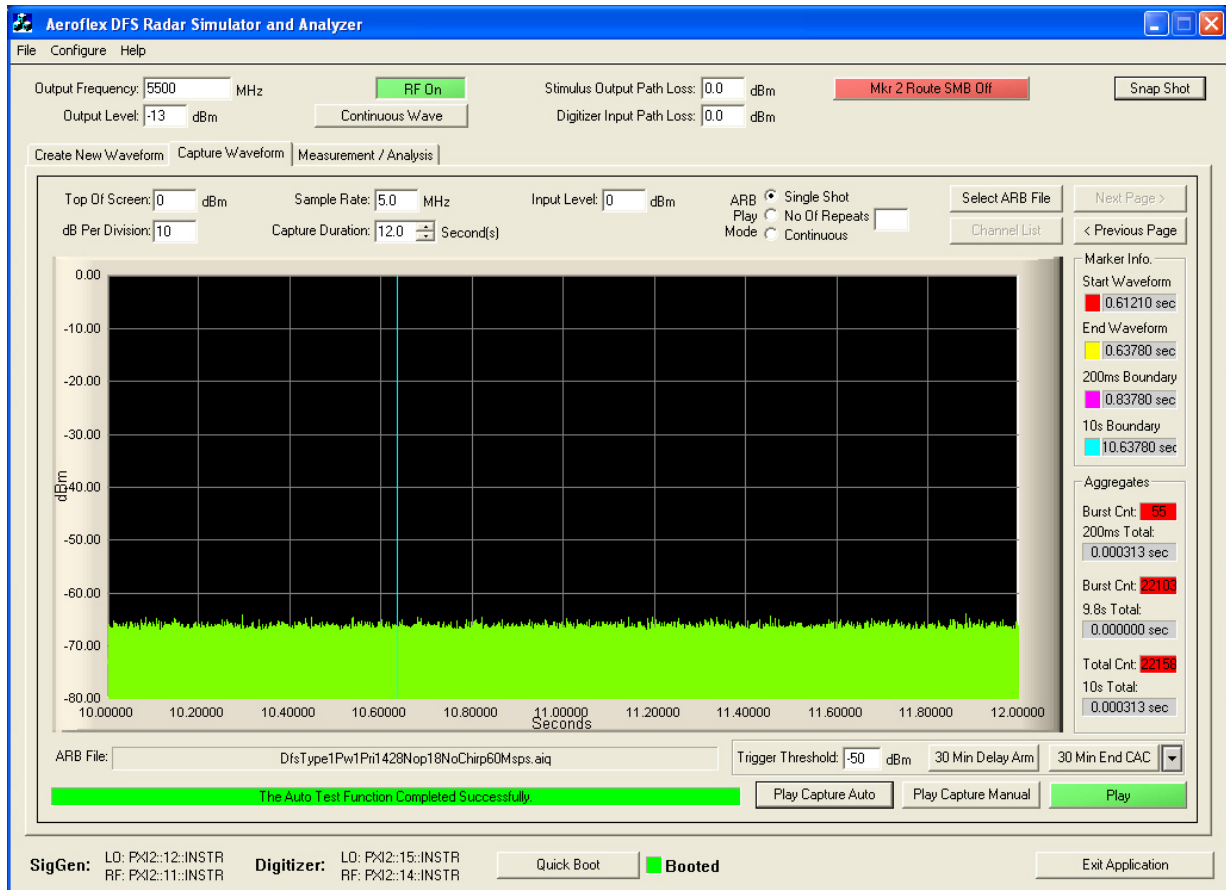

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-92/93 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB89-U2 Rev A
Issue Date: 2nd September 2011
Page: 229 of 242

Channel Closing Transmission Time (802.11n HT40) = 0.103 mSecs (limit 260 mSecs)

Channel Move Time 5510 MHz (802.11n HT40) = 0.102 Secs (limit 10 Secs)

**Channel Move Time, Channel Closing Transmission Time for Type 1 Radar
Captured by the Test System - 0 to 2 seconds (5510 MHz HT-40 mode)**

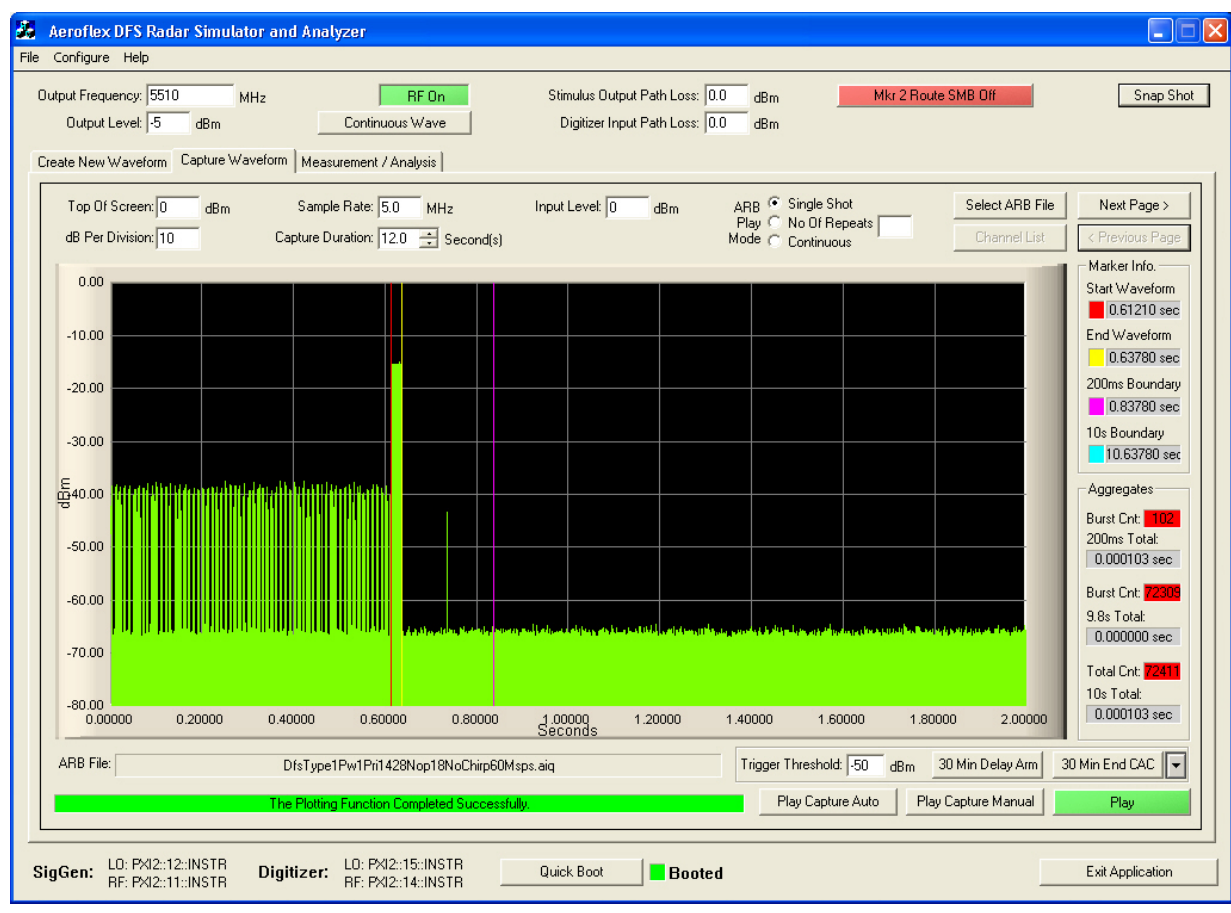


From the plot above it can be seen that the transmission activity within the 200 mS window is 0.103 mS (see 200 mS Total). From the following plots which shows all additional activity within the remainder of the 10 sec measurement window it can be determined that the aggregate transmission is 0.000 mS. This is less than the 60 mS limit.



Title: Aruba AP-92/93 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB89-U2 Rev A
Issue Date: 2nd September 2011
Page: 230 of 242

Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 2 to 4 seconds (5510 MHz HT-40 mode)

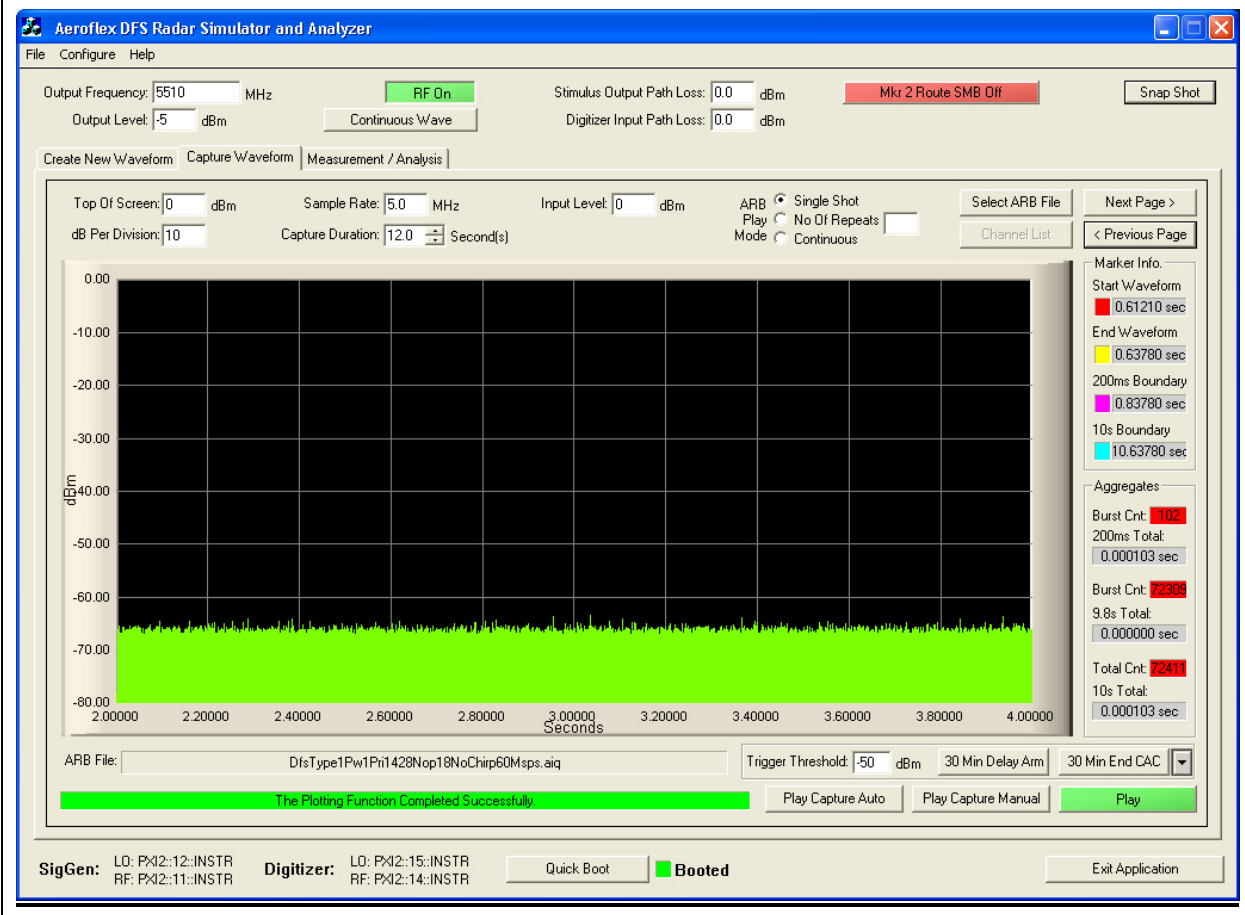


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-92/93 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB89-U2 Rev A
Issue Date: 2nd September 2011
Page: 231 of 242

Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 4 to 6 seconds (5510 MHz HT-40 mode)

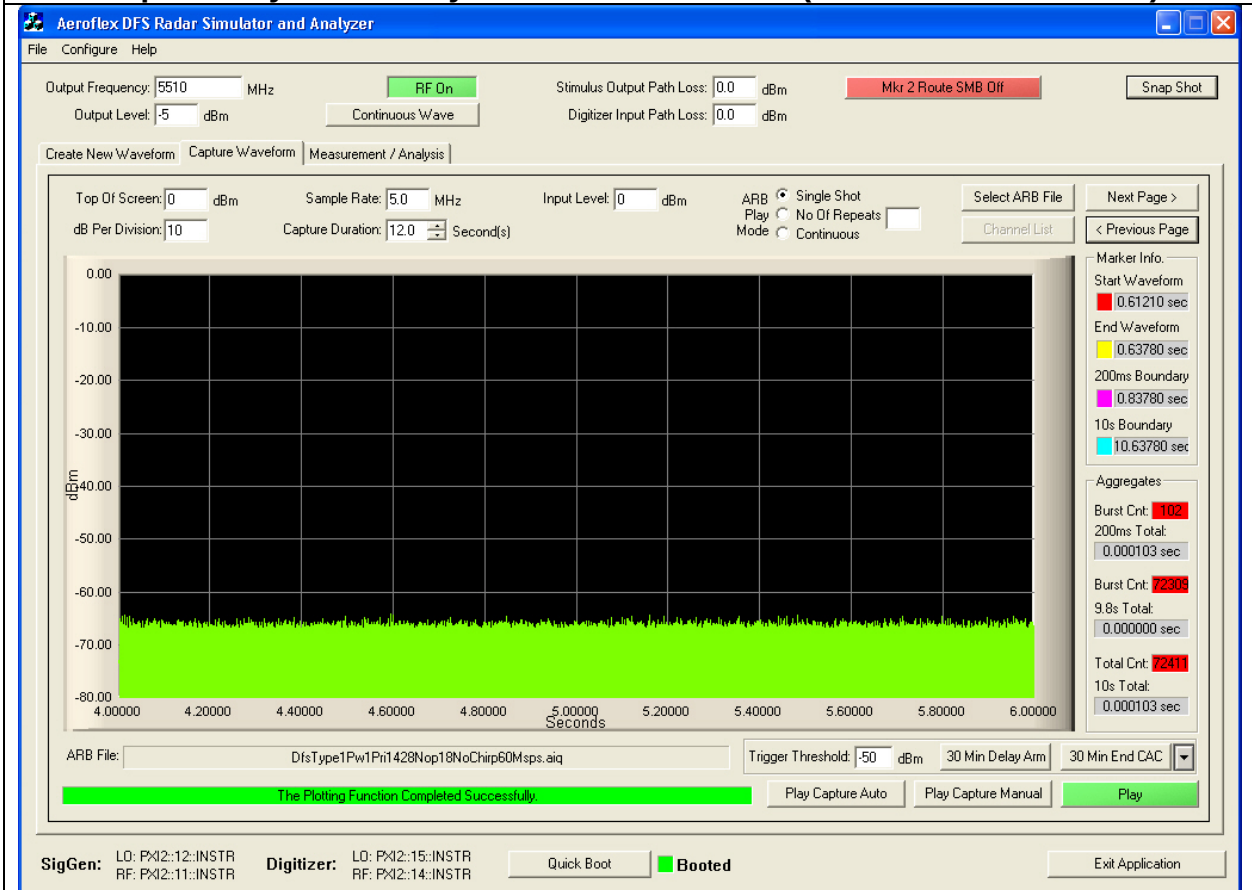


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-92/93 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB89-U2 Rev A
Issue Date: 2nd September 2011
Page: 232 of 242

Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 6 to 8 seconds (5510 MHz HT-40 mode)

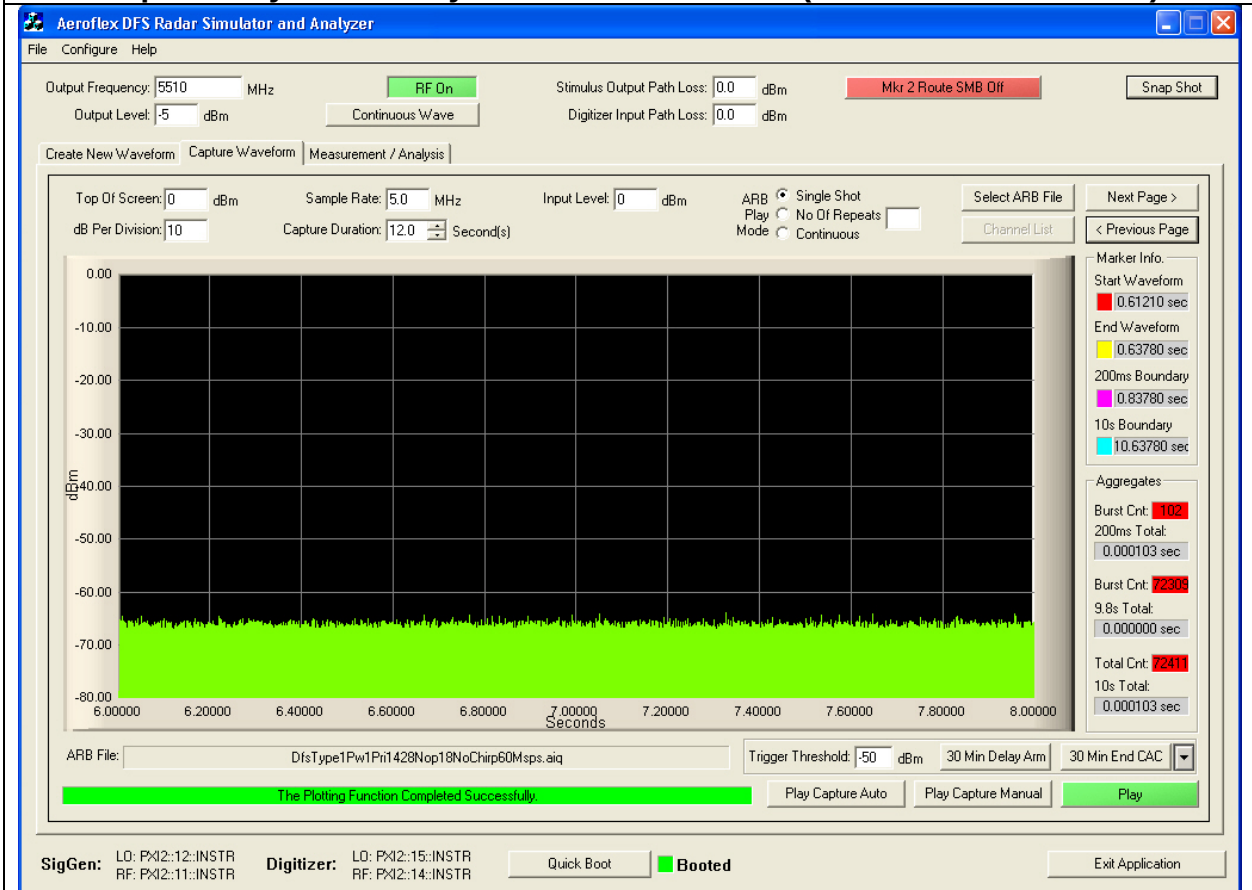


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-92/93 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB89-U2 Rev A
Issue Date: 2nd September 2011
Page: 233 of 242

Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 8 to 10 seconds (5510 MHz HT-40 mode)

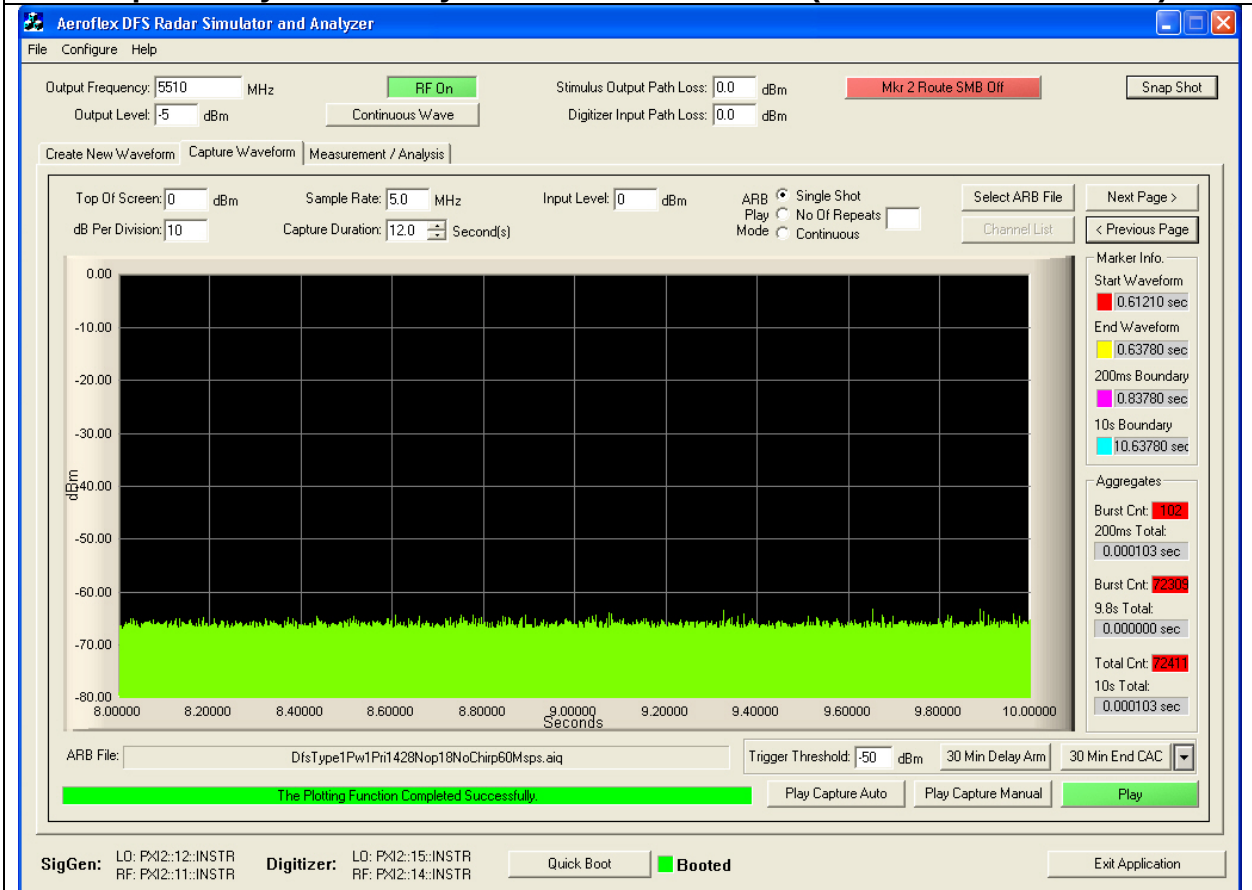


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-92/93 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB89-U2 Rev A
Issue Date: 2nd September 2011
Page: 234 of 242

Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 10 to 12 seconds (5510 MHz HT-40 mode)

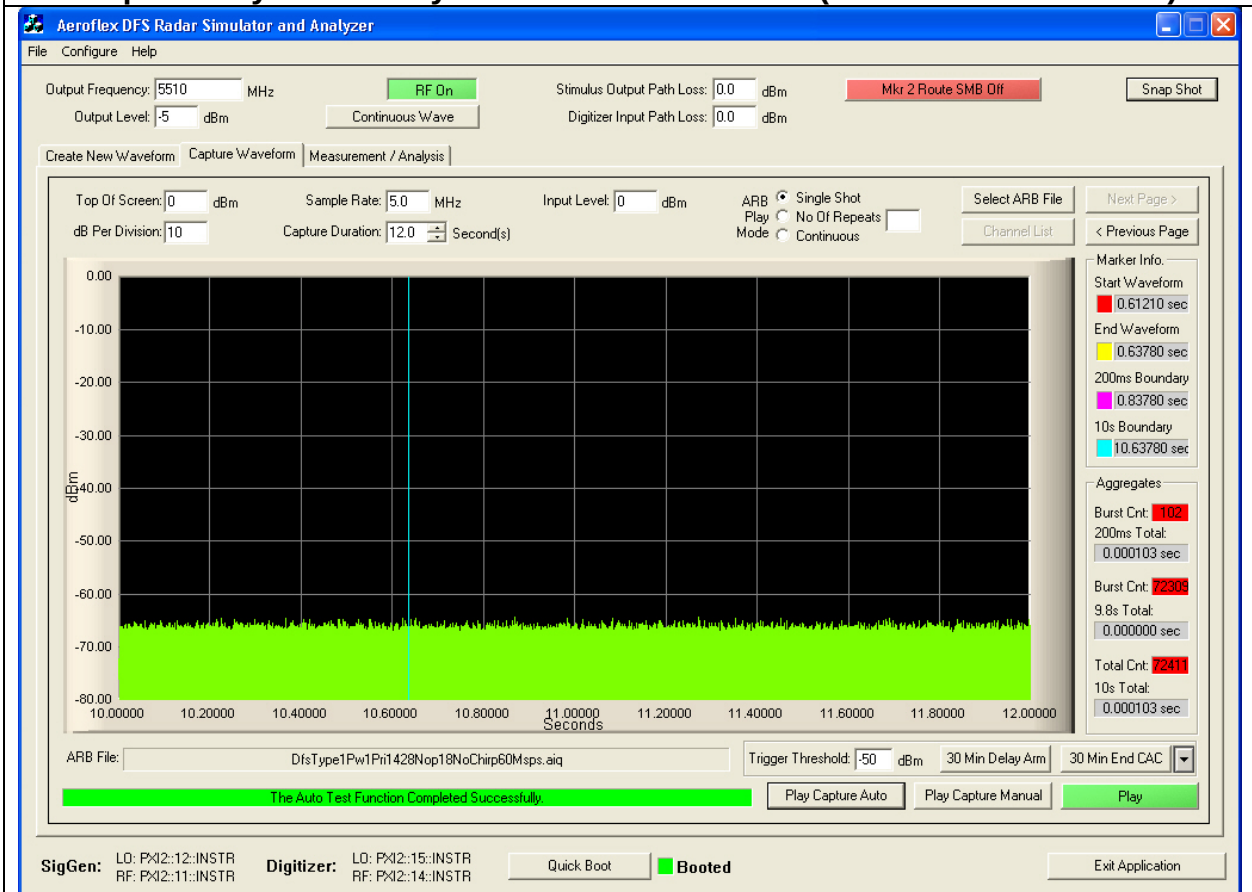

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-92/93 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB89-U2 Rev A
Issue Date: 2nd September 2011
Page: 235 of 242

30 Minute Non-Occupancy Period


The EUT is monitored for more than 30 minutes following the channel close/move time to verify no transmissions resume on this Channel.

30 Minute Non-Occupancy Period Type 1 Radar 5,500MHz 802.11a

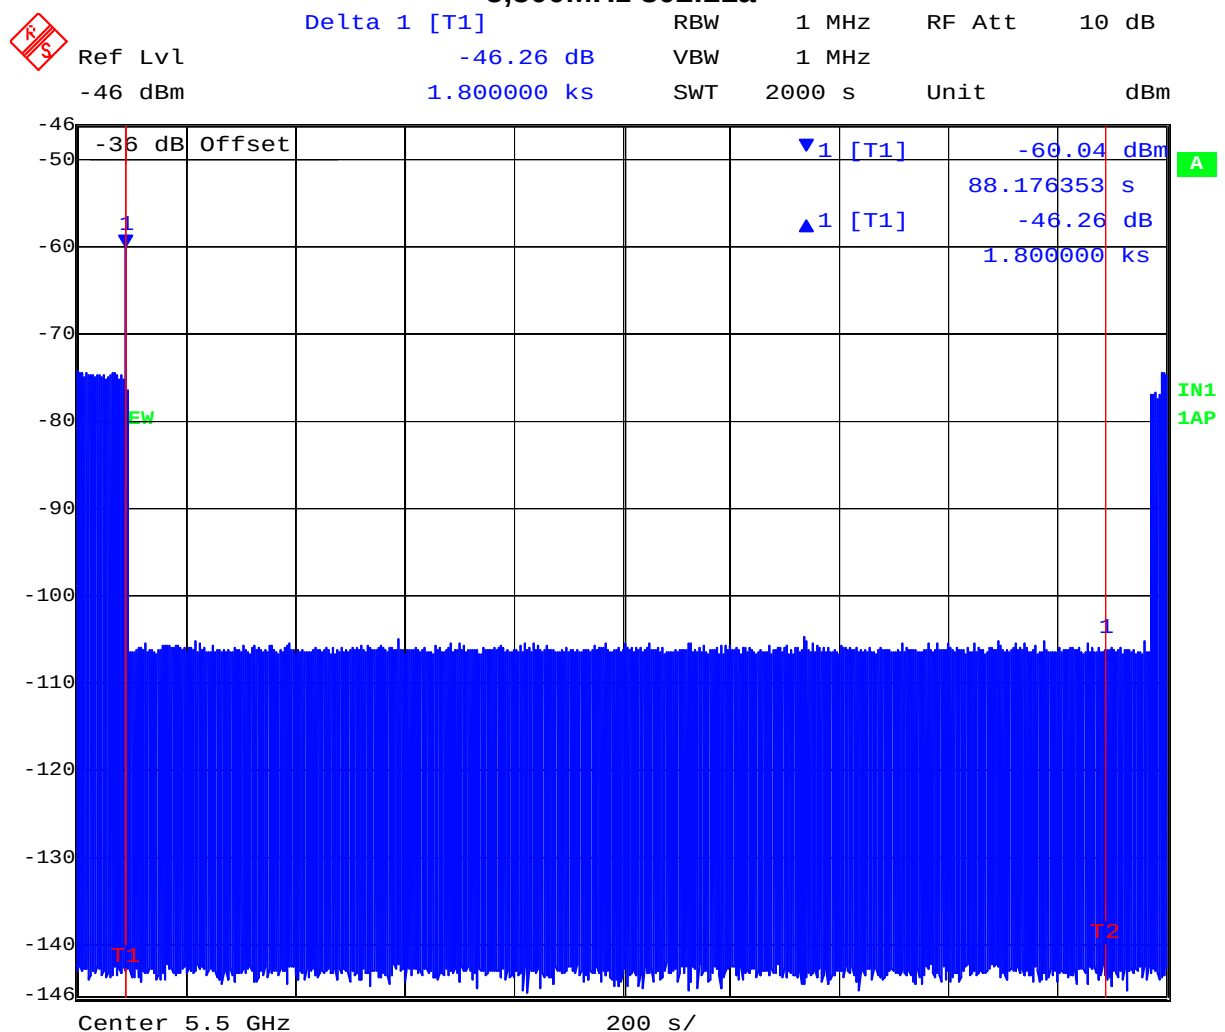

Date: 8.JUN.2011 15:14:31

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

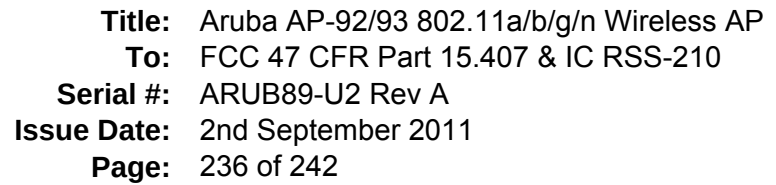

Ref Lvl -46 dBm

Marker 1 [T1] -60.05 dBm

RBW 1 MHz

VBW 1 MHz

SWT 2000 s

RF Att 10 dB

Unit dBm

-35 dB Offset

1 [T1] -60.05 dBm

88.176353 s

Δ1 [T1] -45.96 dB

1.800000 ks

1VIEW

IN1 1AP

Center 5.51 GHz

200 s/

Date: 8.JUN.2011 11:15:52

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-92/93 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB89-U2 Rev A
Issue Date: 2nd September 2011
Page: 237 of 242

6.2.6. Statistical Performance Check

The steps below define the procedure to determine the minimum percentage of detection when a radar burst with a level equal to the DFS Detection Threshold is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5,500MHz 802.11a and 5,510MHz 802.11n HT40.

The Radar Waveform generator sends the individual waveform for each of the radar types 1-6. Statistical data will be gathered to determine the ability of the device to detect the radar test waveforms. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs. The percentage of successful detection is calculated by:

$$\text{Total \# of detections} \div \text{Total \# of Trials} \times 100 = \text{Probability of Detection}$$

The Minimum number of trails, minimum percentage of successful detection and the average minimum percentage of successful detection are found in the Radar Test Waveforms section.



Title: Aruba AP-92/93 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB89-U2 Rev A
Issue Date: 2nd September 2011
Page: 238 of 242

Verification of Detection 5,500MHz 802.11a

Trial #	Detection = √, No Detection = 0					
	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	0	√	0	√	√	√
2	√	√	√	√	√	0
3	√	√	0	√	0	√
4	√	√	√	√	√	√
5	√	√	√	√	√	√
6	√	√	√	√	√	√
7	√	√	√	√	√	√
8	√	√	√	√	√	0
9	√	√	√	√	0	√
10	√	√	0	√	√	√
11	√	√	√	√	0	√
12	√	0	√	√	√	√
13	√	0	√	√	√	0
14	√	0	√	√	√	√
15	√	0	√	0	0	√
16	√	0	√	0	√	√
17	√	0	√	√	√	√
18	√	√	√	√	√	0
19	√	√	√	√	0	√
20	√	√	0	√	√	√
21	√	√	√	√	√	√
22	√	√	0	√	√	√
23	√	√	0	√	√	0
24	√	√	√	0	√	√
25	√	√	√	√	0	√
26	√	0	√	0	√	0
27	√	√	√	√	√	√
28	√	√	√	0	√	0
29	√	√	√	√	√	√
30	√	0	√	√	√	√
Detection Percentage	96.6% (>60%)	73.3% (>60%)	80.0% (>60%)	83.3% (>60%)	80% (>80%)	76.6% (>70%)

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is required and calculated as follows;

$$(P_{d1} + P_{d2} + P_{d3} + P_{d4}) / 4 = (96.6\% + 73.3\% + 80\% + 83.3\%) / 4 = 83.3\% (> 80\%)$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-92/93 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB89-U2 Rev A
Issue Date: 2nd September 2011
Page: 239 of 242

Verification of Detection 5,510MHz 802.11n HT40

Trial #	Detection = √, No Detection = 0					
	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	√	√	√	√	√	√
2	√	√	√	√	√	0
3	√	√	√	√	√	√
4	√	√	√	√	√	√
5	√	√	√	√	√	√
6	√	√	√	√	√	√
7	√	√	√	√	0	√
8	√	√	√	√	0	√
9	√	√	0	√	√	√
10	√	√	√	√	√	√
11	√	√	√	√	√	√
12	√	0	√	√	0	√
13	√	0	√	√	√	√
14	√	0	√	√	√	√
15	√	0	0	√	√	√
16	0	0	0	√	√	√
17	√	0	√	√	0	√
18	√	√	0	√	√	√
19	√	√	√	√	√	√
20	√	√	√	√	√	√
21	√	√	√	√	0	√
22	√	√	√	√	√	√
23	√	0	√	√	√	√
24	√	√	0	0	√	√
25	√	√	√	√	√	√
26	√	√	√	0	√	√
27	√	√	√	√	√	√
28	√	√	0	0	√	√
29	√	√	√	√	√	√
30	√	0	√	√	0	√
Detection Percentage	96.6%% (>60%)	73.3% (>60%)	80% (>60%)	90% (>60%)	80% (>80%)	96.6% (>70%)

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is required and calculated as follows;

$$(P_{d1} + P_{d2} + P_{d3} + P_{d4}) / 4 = (96.6\% + 73.3\% + 80\% + 90\%) / 4 = 85\% (> 80\%)$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-92/93 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB89-U2 Rev A
Issue Date: 2nd September 2011
Page: 240 of 242

Measurement Uncertainty Time/Power

Measurement uncertainty	
- Time	4%
- Power	1.33dB

Traceability

Test Equipment Used

0072, 0083, 0098, 0116, 0132, 0158, 0313, 0314, 0193, 0223, 0252, 0253, 0251, 0256, 0328, 0329

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-92/93 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB89-U2 Rev A
Issue Date: 2nd September 2011
Page: 241 of 242

7. TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Serial #
0134	Amplifier	Com Power	PA 122	181910
0158	Barometer /Thermometer	Control Co.	4196	E2846
0287	EMI Receiver	Rhode & Schwartz	ESIB 40	100201
0252	SMA Cable	Megaphase	Sucoflex 104	None
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787- 3G03G0	209089-001
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181- 3G0300	209092-001
0313	Coupler	Hewlett Packard	86205A	3140A01285
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623
0070	Power Meter	Hewlett Packard	437B	3125U11552
0116	Power Sensor	Hewlett Packard	8485A	3318A19694
0117	Power Sensor	Hewlett Packard	8487D	3318A00371
0184	Pulse Limiter	Rhode & Schwartz	ESH3Z2	357.8810.52
0190	LISN	Rhode & Schwartz	ESH3Z5	836679/006
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001
0301	5.6 GHz Notch Filter	Micro-Tronics	RBC50704	001
0302	5.25 GHz Notch Filter	Micro-Tronics	BRC50703	002
0303	5.8 GHz Notch Filter	Micro-Tronics	BRC50705	003
0304	2.4GHzHz Notch Filter	Micro-Tronics	--	001
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002
0335	1-18GHz Horn Antenna	ETS- Lindgren	3117	00066580
0337	Amplifier	MiCOM Labs	--	--
0338	Antenna	Sunol Sciences	JB-3	A052907

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200
Pleasanton, CA 94566, USA
Tel: 1.925.462.0304
Fax: 1.925.462.0306
www.micomlabs.com