



802.11ax-HE160 - Ant 0

Channel 143 (6665MHz)

The Reference Level

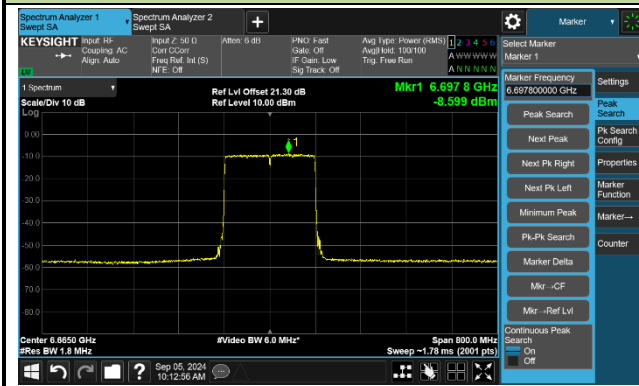


The Mask Data

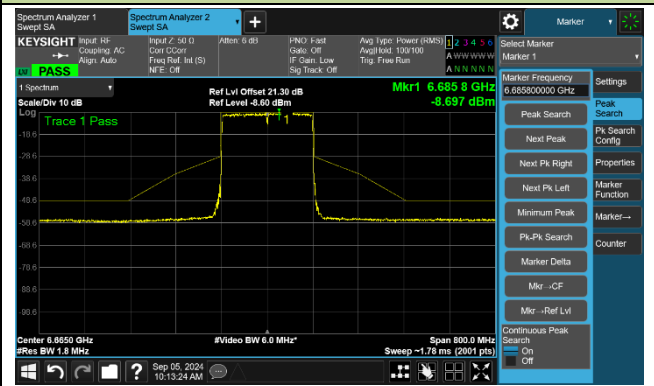


802.11ax-HE20 - Ant 1

Channel 1 (5955MHz)

The Reference Level

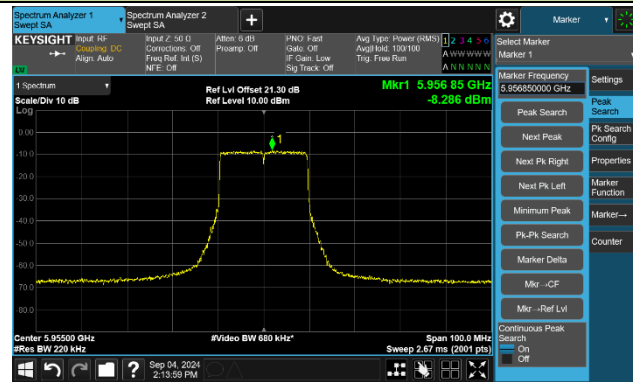


The Mask Data

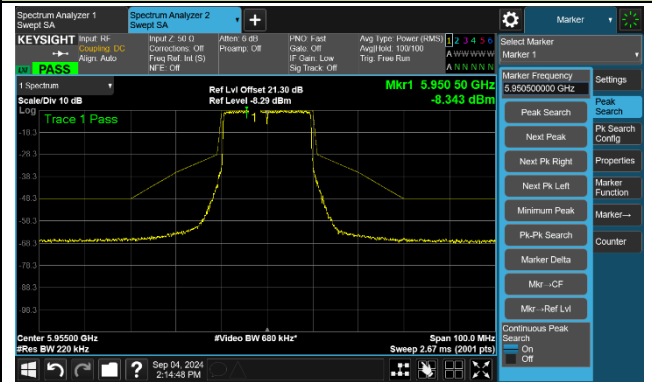


Channel 49 (6195MHz)

The Reference Level

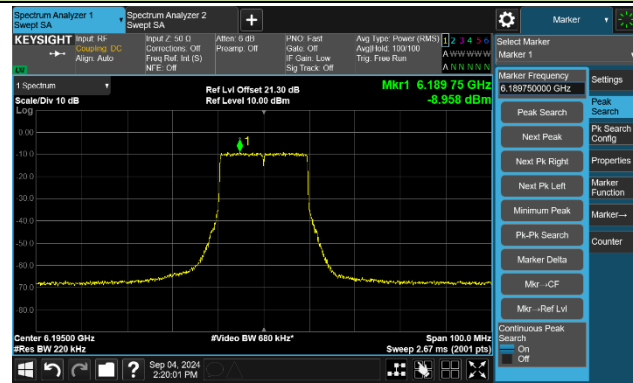


The Mask Data

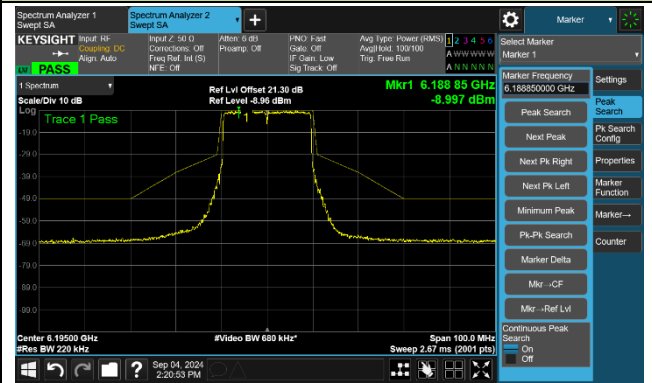


Channel 93 (6415MHz)

The Reference Level

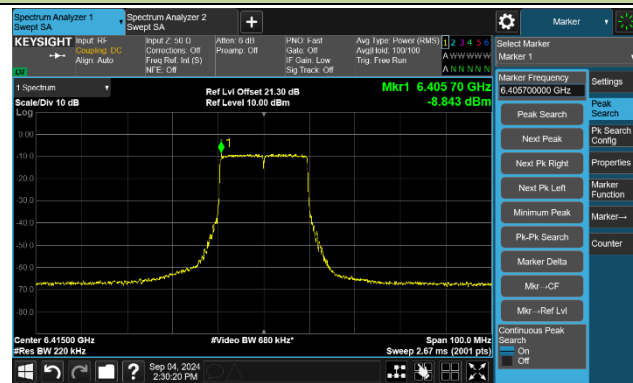


The Mask Data

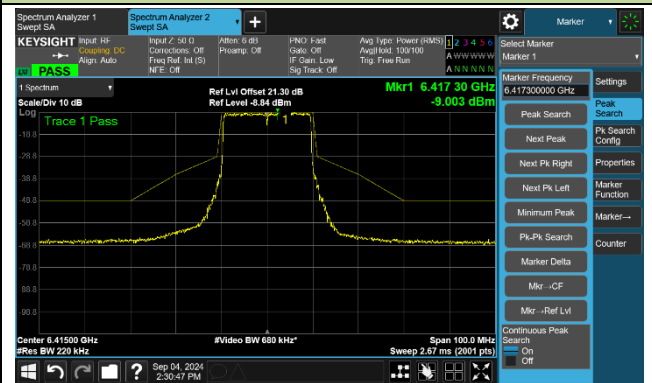


802.11ax-HE20 - Ant 1

Channel 117 (6535MHz)

The Reference Level

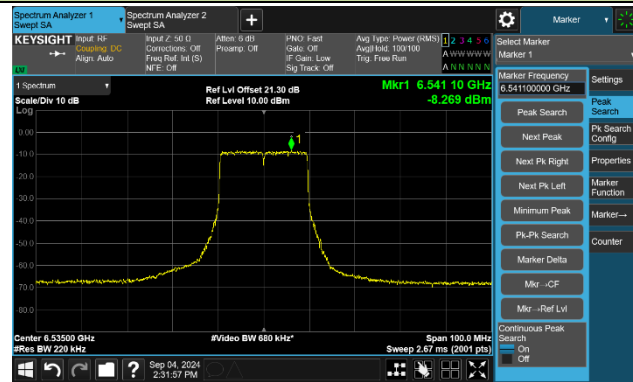


The Mask Data

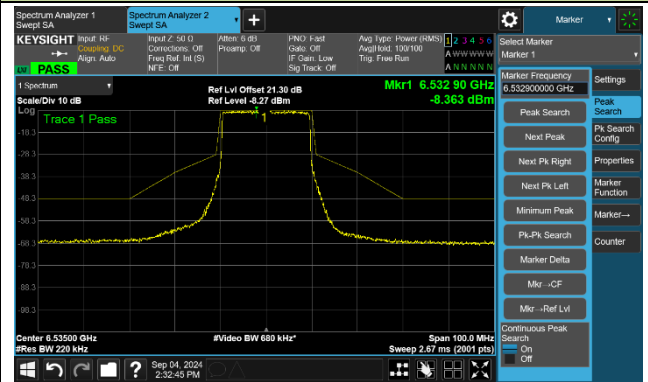


Channel 153 (6715MHz)

The Reference Level

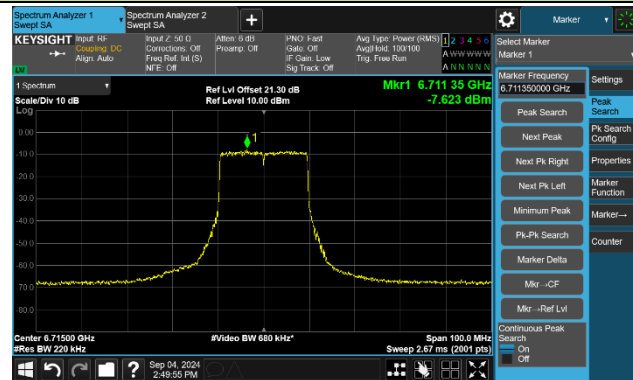


The Mask Data

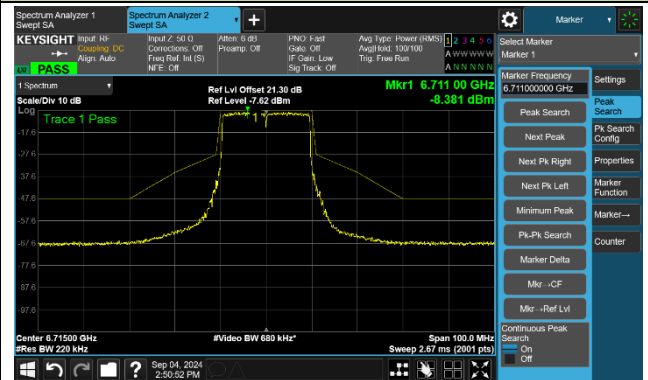


Channel 181 (6855MHz)

The Reference Level

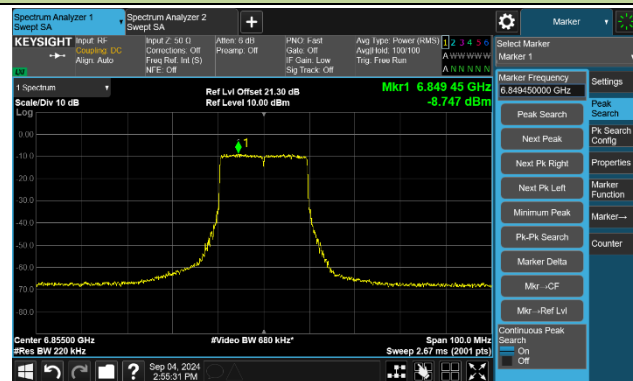


The Mask Data

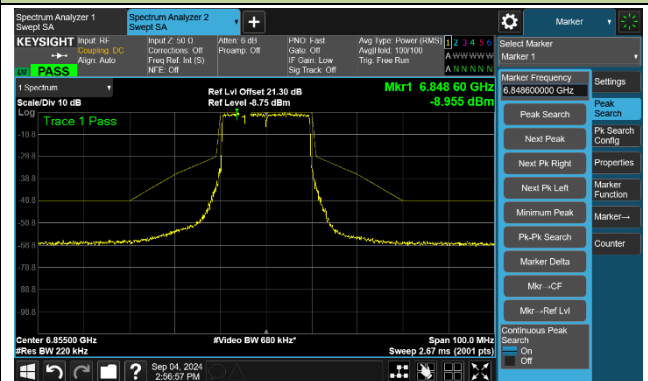


802.11ax-HE40 - Ant 1

Channel 3 (5965MHz)

The Reference Level

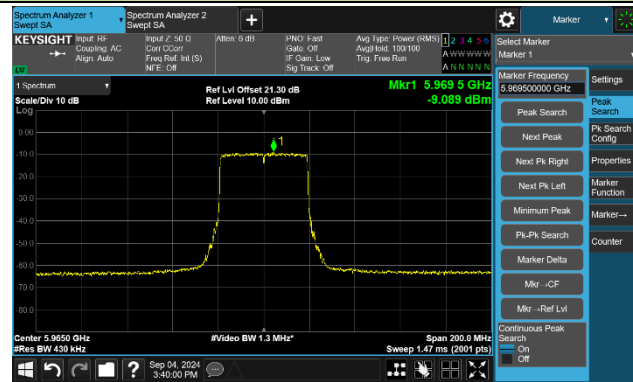


The Mask Data

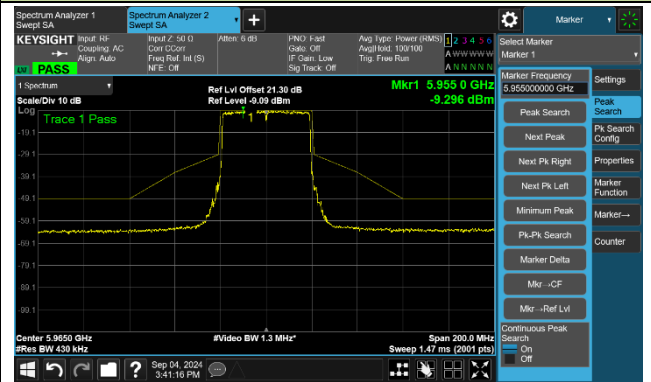


Channel 51 (6205MHz)

The Reference Level

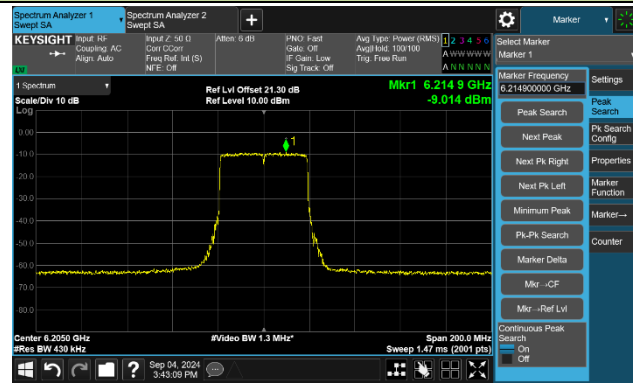


The Mask Data

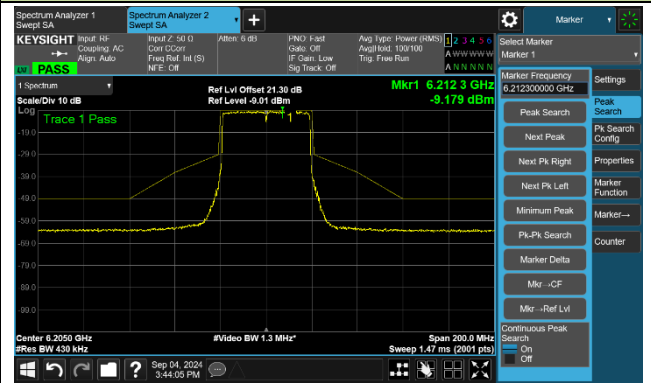


Channel 91 (6405MHz)

The Reference Level

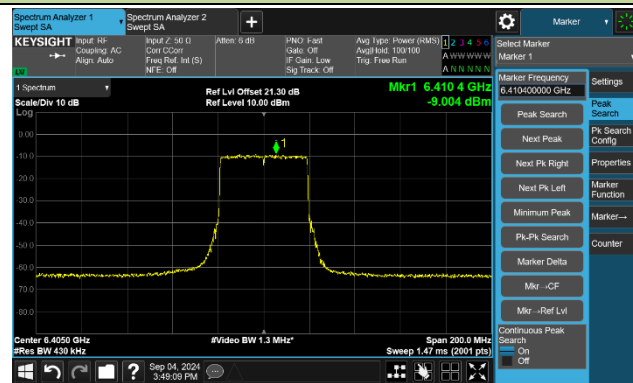


The Mask Data

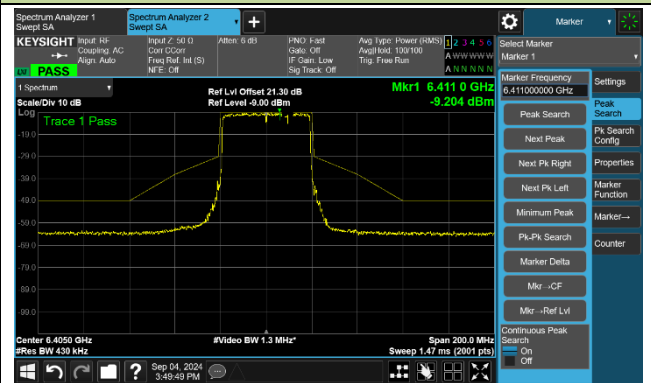


802.11ax-HE40 - Ant 1

Channel 123 (6565MHz)

The Reference Level

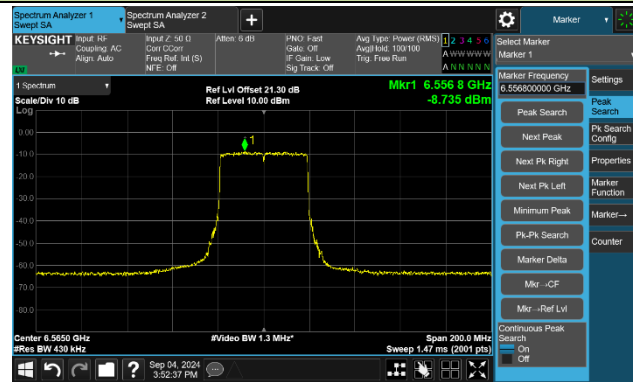


The Mask Data

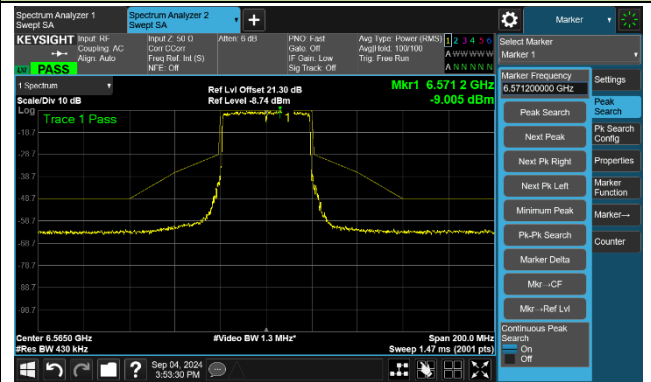


Channel 147 (6685MHz)

The Reference Level

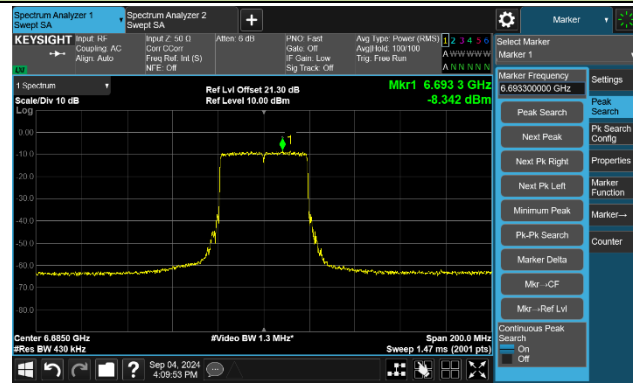


The Mask Data

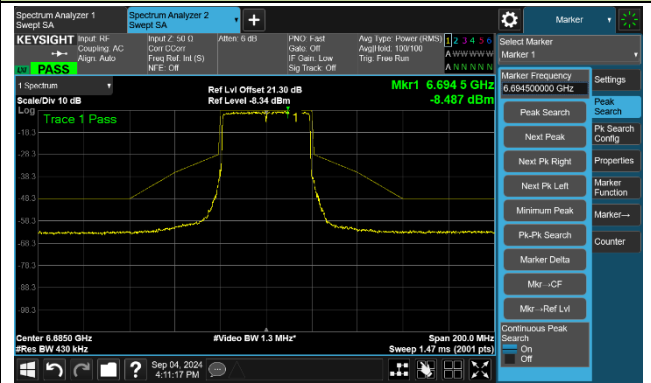


Channel 179 (6845MHz)

The Reference Level

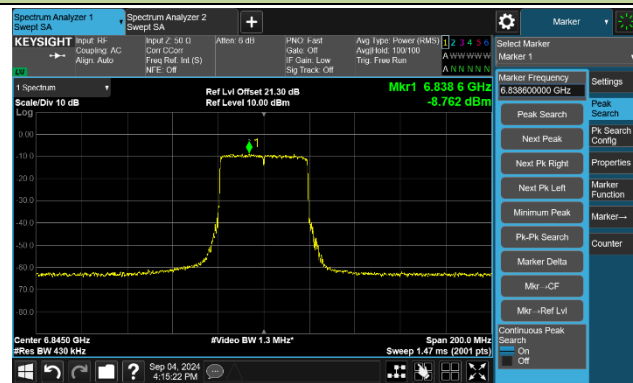


The Mask Data

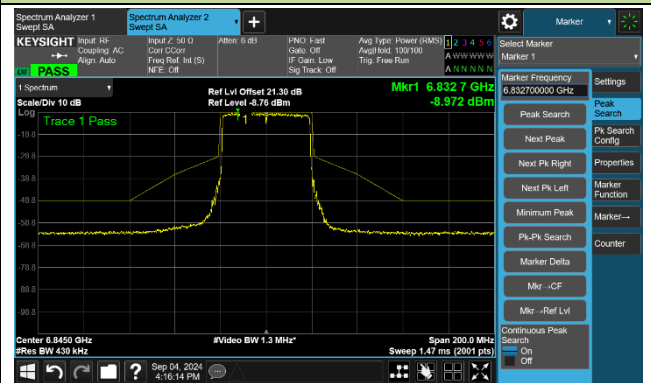


802.11ax-HE80 - Ant 1

Channel 7 (5985MHz)

The Reference Level

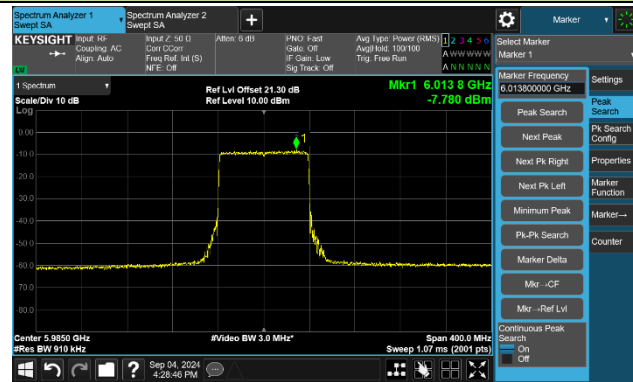


The Mask Data

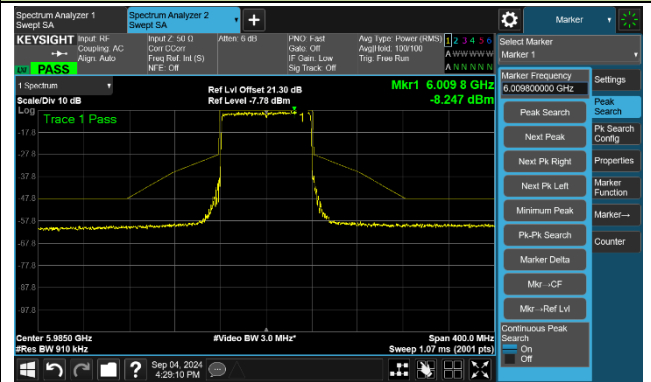


Channel 55 (6225MHz)

The Reference Level

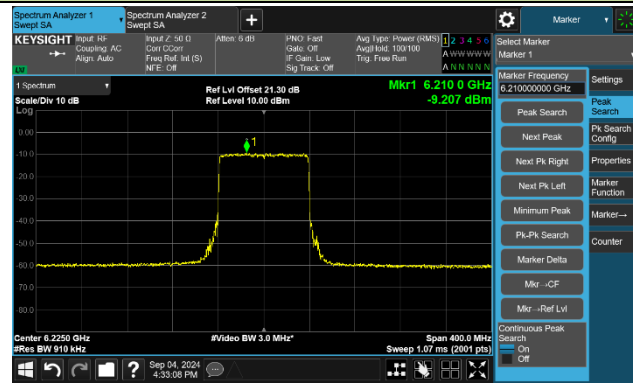


The Mask Data

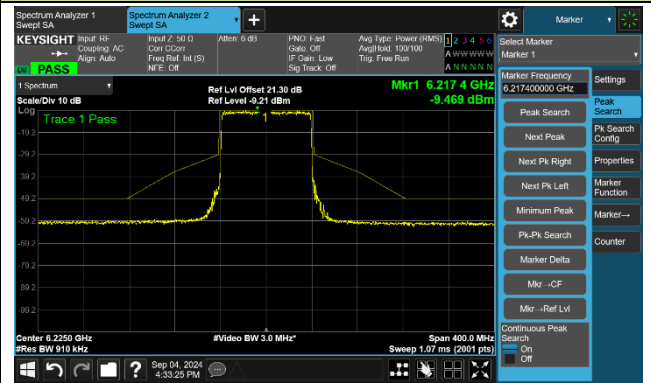


Channel 87 (6385MHz)

The Reference Level

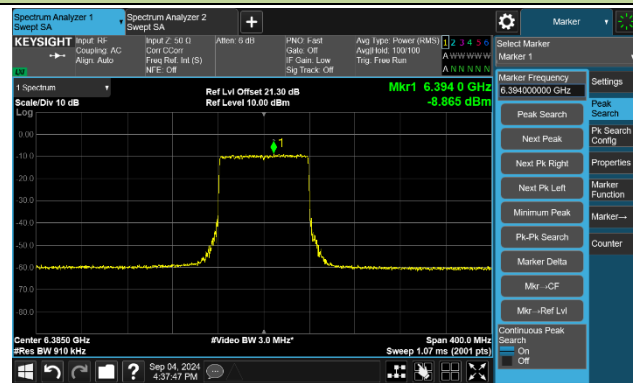


The Mask Data

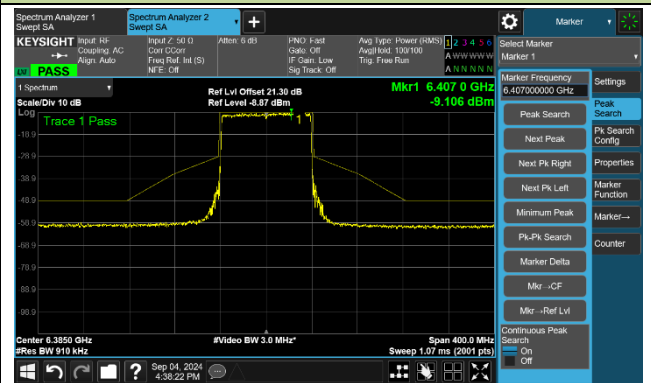


802.11ax-HE80 - Ant 1

Channel 135 (6625MHz)

The Reference Level

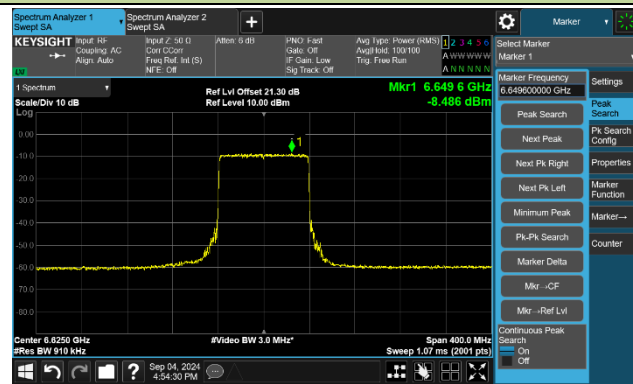


The Mask Data

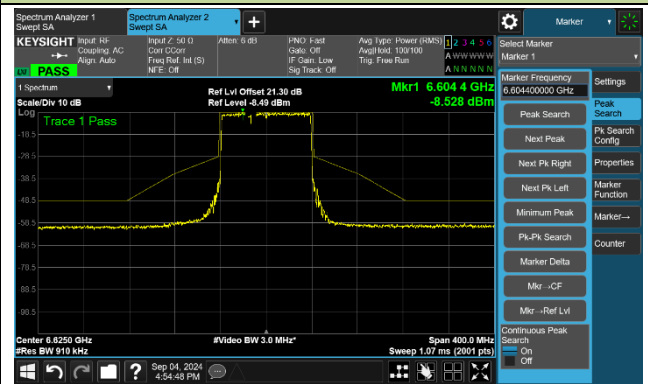


Channel 151 (6705MHz)

The Reference Level

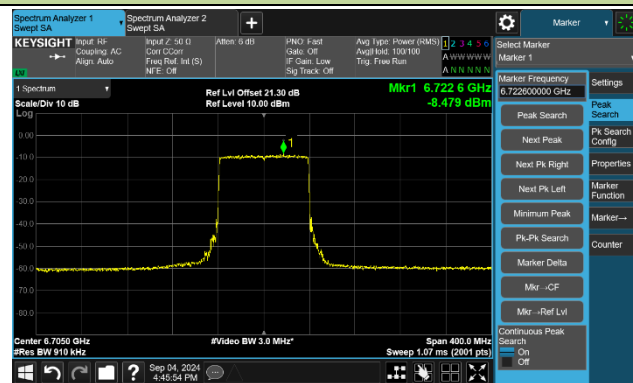


The Mask Data

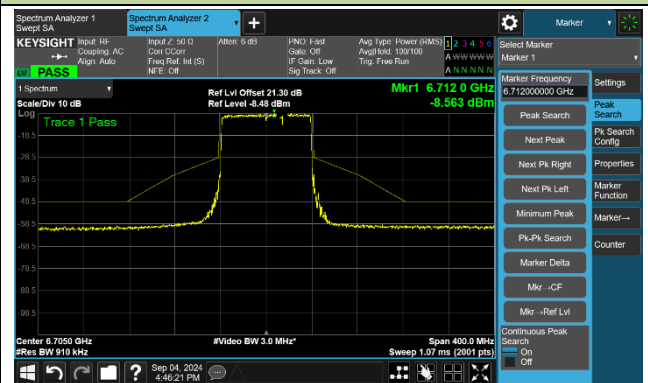


Channel 167 (6785MHz)

The Reference Level

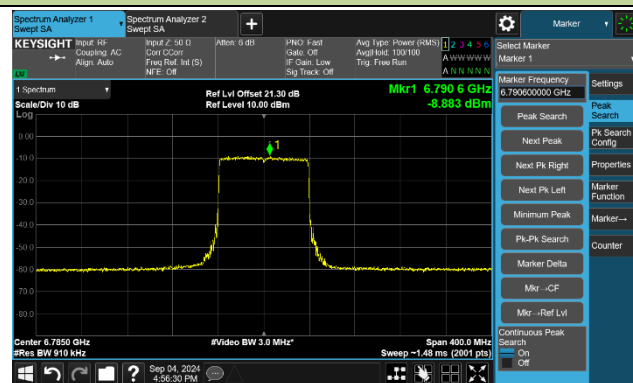


The Mask Data

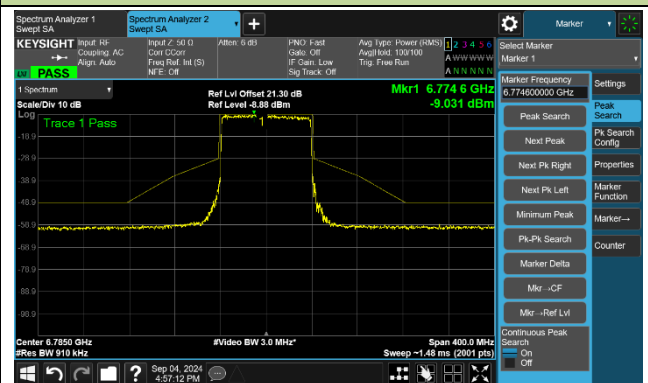


802.11ax-HE160 - Ant 1

Channel 15 (6025MHz)

The Reference Level

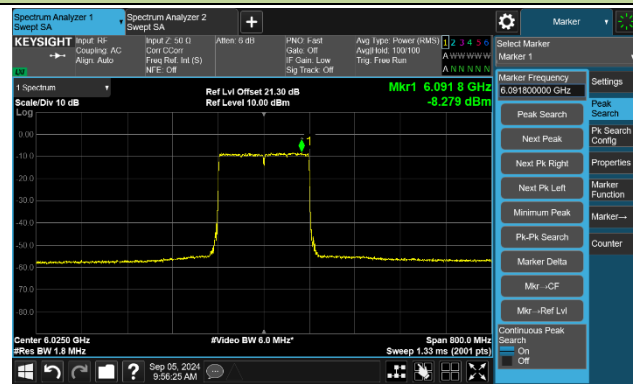


The Mask Data

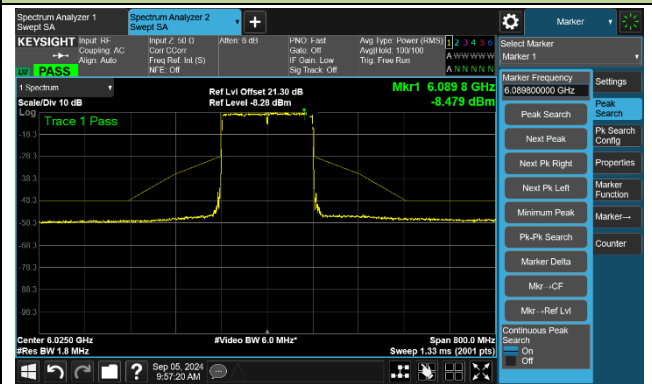


Channel 47 (6185MHz)

The Reference Level

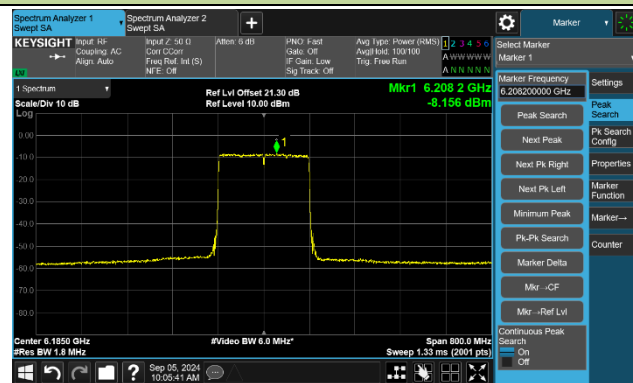


The Mask Data

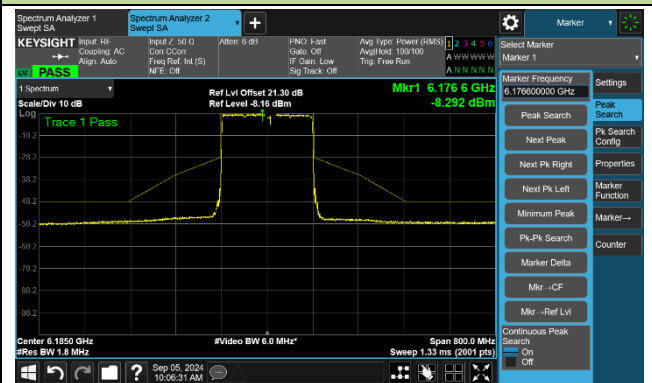


Channel 79 (6345MHz)

The Reference Level

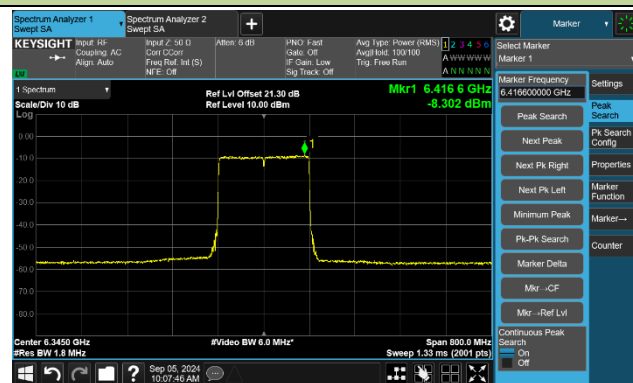


The Mask Data

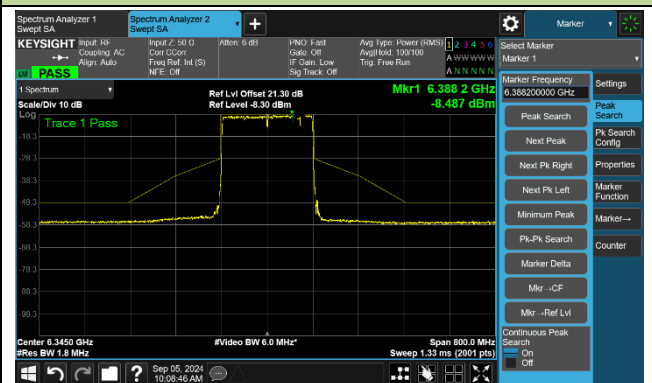


802.11ax-HE160 - Ant 1

Channel 143 (6665MHz)

The Reference Level

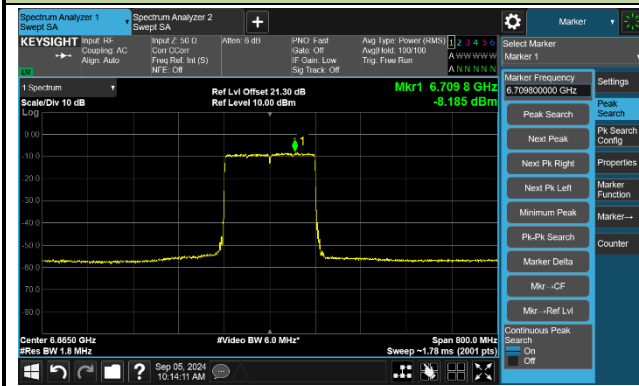

The Mask Data

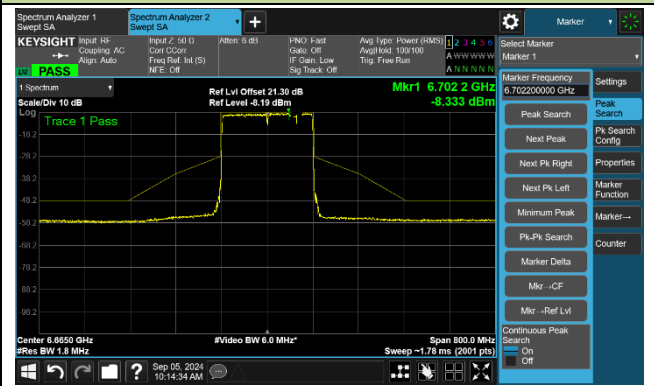

6. Frequency Stability Test Result

Test Site	WZ-TR3	Test Engineer	Lynn Yang
Test Date	2023-08-15		
Test Mode	5955MHz (Carrier Mode)		

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	120	- 30	16.13	16.18	16.17	16.19
		- 20	14.87	14.97	15.00	15.05
		- 10	10.45	11.60	12.47	12.30
		0	8.75	7.75	7.92	8.13
		+ 10	4.52	3.67	3.57	3.54
		+ 20	-0.77	-1.35	-1.30	-1.25
		+ 30	-6.19	-5.82	-5.11	-5.03
		+ 40	-8.14	-7.99	-7.79	-7.75
		+ 50	-8.28	-8.21	-8.20	-8.20
115	138	+ 20	-1.23	-1.35	-1.30	-1.26
85	102	+ 20	-1.32	-1.33	-1.30	-1.27

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} *10⁶.

7. Radiated Spurious Emission Measurement Test Result

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-07-25
Test Mode	802.11ax-HE20 (Switch off)	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10919.5	41.9	5.2	47.1	74.0	-26.9	Peak	Horizontal
	11704.9	42.4	4.8	47.3	74.0	-26.7	Peak	Horizontal
*	13019.0	45.0	5.0	50.0	88.2	-38.2	Peak	Horizontal
*	17054.8	48.7	3.3	52.0	88.2	-36.2	Peak	Horizontal
	11455.0	41.9	5.3	47.2	74.0	-26.8	Peak	Vertical
	12050.0	42.6	5.2	47.8	74.0	-26.2	Peak	Vertical
*	13768.7	45.0	4.9	49.9	88.2	-38.3	Peak	Vertical
*	14977.4	45.4	5.7	51.2	88.2	-37.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-08-01
Test Mode	802.11ax-HE20 (Switch off)	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10217.4	40.8	6.0	46.9	88.2	-41.4	Peak	Horizontal
	10829.4	41.8	5.3	47.1	74.0	-26.9	Peak	Horizontal
	11854.5	42.2	4.9	47.1	74.0	-26.9	Peak	Horizontal
*	16475.1	46.5	5.2	51.6	88.2	-36.6	Peak	Horizontal
*	9858.7	40.1	6.3	46.4	88.2	-41.8	Peak	Vertical
	11492.4	41.9	5.3	47.2	74.0	-26.8	Peak	Vertical
	12145.2	43.6	5.0	48.6	74.0	-25.4	Peak	Vertical
*	12886.4	43.8	5.3	49.2	88.2	-39.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-08-01
Test Mode	802.11ax-HE20 (Switch off)	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10873.6	41.6	5.1	46.7	74.0	-27.3	Peak	Horizontal
	11592.7	42.4	5.1	47.5	74.0	-26.5	Peak	Horizontal
*	12862.6	44.0	5.5	49.5	88.2	-38.7	Peak	Horizontal
*	14156.3	44.6	5.6	50.2	88.2	-38.0	Peak	Horizontal
	11460.1	42.3	5.3	47.6	74.0	-26.4	Peak	Vertical
	12072.1	42.9	5.1	48.0	74.0	-26.0	Peak	Vertical
*	12903.4	45.1	5.2	50.2	88.2	-38.0	Peak	Vertical
*	14088.3	44.7	5.5	50.2	88.2	-38.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-08-01
Test Mode	802.11ax-HE20 (Switch off)	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11456.7	42.2	5.3	47.5	74.0	-26.5	Peak	Horizontal
	12072.1	43.5	5.1	48.5	74.0	-25.5	Peak	Horizontal
*	13818.0	44.9	4.7	49.6	88.2	-38.6	Peak	Horizontal
*	14980.8	45.9	5.7	51.6	88.2	-36.6	Peak	Horizontal
*	10259.9	40.9	5.9	46.7	88.2	-41.5	Peak	Vertical
	11477.1	42.1	5.4	47.5	74.0	-26.5	Peak	Vertical
	12135.0	43.0	5.0	48.0	74.0	-26.0	Peak	Vertical
*	13853.7	45.6	4.9	50.5	88.2	-37.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-08-01
Test Mode	802.11ax-HE20 (Switch off)	Test Channel	153
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10023.6	40.7	5.9	46.7	88.2	-41.6	Peak	Horizontal
	11475.4	42.8	5.4	48.2	74.0	-25.8	Peak	Horizontal
	12220.0	43.8	4.8	48.7	74.0	-25.4	Peak	Horizontal
*	14066.2	44.7	5.4	50.2	88.2	-38.0	Peak	Horizontal
	11324.1	41.5	5.4	46.9	74.0	-27.1	Peak	Vertical
	12243.8	43.9	4.8	48.6	74.0	-25.4	Peak	Vertical
*	13860.5	44.2	4.9	49.2	88.2	-39.1	Peak	Vertical
*	14946.8	45.2	5.8	50.9	88.2	-37.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-08-01
Test Mode	802.11ax-HE20 (Switch off)	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11259.5	41.8	5.4	47.2	74.0	-26.8	Peak	Horizontal
	12350.9	43.7	4.7	48.4	74.0	-25.6	Peak	Horizontal
*	12901.7	44.7	5.2	49.9	88.2	-38.4	Peak	Horizontal
*	15191.6	46.2	5.9	52.1	88.2	-36.1	Peak	Horizontal
	11417.6	42.0	5.4	47.4	74.0	-26.6	Peak	Vertical
	12621.2	44.7	5.4	50.1	74.0	-23.9	Peak	Vertical
*	13947.2	44.7	5.1	49.8	88.2	-38.4	Peak	Vertical
*	14940.0	45.7	5.7	51.4	88.2	-36.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-08-01
Test Mode	802.11ax-HE40 (Switch off)	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11087.8	42.2	5.0	47.3	74.0	-26.7	Peak	Horizontal
	12068.7	43.0	5.1	48.1	74.0	-25.9	Peak	Horizontal
*	14151.2	44.7	5.6	50.3	88.2	-37.9	Peak	Horizontal
*	14904.3	45.6	5.8	51.4	88.2	-36.8	Peak	Horizontal
	11402.3	41.6	5.5	47.2	74.0	-26.8	Peak	Vertical
	12155.4	43.4	5.0	48.4	74.0	-25.6	Peak	Vertical
*	14839.7	45.7	5.5	51.2	88.2	-37.0	Peak	Vertical
*	16609.4	46.6	4.6	51.2	88.2	-37.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-08-01
Test Mode	802.11ax-HE40 (Switch off)	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9761.8	41.2	6.1	47.3	88.2	-40.9	Peak	Horizontal
	11324.1	41.6	5.4	47.0	74.0	-27.0	Peak	Horizontal
	12182.6	43.2	5.0	48.3	74.0	-25.7	Peak	Horizontal
*	14895.8	45.8	5.7	51.5	88.2	-36.7	Peak	Horizontal
*	9884.2	40.2	6.1	46.3	88.2	-41.9	Peak	Vertical
	11315.6	41.9	5.4	47.2	74.0	-26.8	Peak	Vertical
	12237.0	43.0	4.8	47.7	74.0	-26.3	Peak	Vertical
*	14127.4	44.3	5.5	49.7	88.2	-38.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-08-01
Test Mode	802.11ax-HE40 (Switch off)	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11429.5	41.8	5.4	47.1	74.0	-26.9	Peak	Horizontal
	12218.3	43.9	4.8	48.8	74.0	-25.3	Peak	Horizontal
*	14076.4	45.3	5.4	50.7	88.2	-37.5	Peak	Horizontal
*	15067.5	45.9	5.8	51.7	88.2	-36.5	Peak	Horizontal
*	10173.2	40.8	5.9	46.7	88.2	-41.5	Peak	Vertical
	11232.3	41.7	5.3	47.0	74.0	-27.0	Peak	Vertical
	12184.3	42.5	5.0	47.6	74.0	-26.4	Peak	Vertical
*	14084.9	44.5	5.5	50.0	88.2	-38.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-08-01
Test Mode	802.11ax-HE40 (Switch off)	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10283.7	40.9	5.9	46.8	88.2	-41.4	Peak	Horizontal
	11490.7	42.5	5.3	47.9	74.0	-26.1	Peak	Horizontal
	12172.4	43.0	5.1	48.1	74.0	-26.0	Peak	Horizontal
*	13969.3	44.6	5.3	49.9	88.2	-38.3	Peak	Horizontal
*	10297.3	41.4	5.7	47.1	88.2	-41.2	Peak	Vertical
	11432.9	41.7	5.3	47.1	74.0	-26.9	Peak	Vertical
	12233.6	44.0	4.8	48.7	74.0	-25.3	Peak	Vertical
*	14146.1	43.7	5.6	49.3	88.2	-38.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-08-01
Test Mode	802.11ax-HE40 (Switch off)	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10010.0	40.2	5.9	46.1	88.2	-42.1	Peak	Horizontal
	11052.1	41.5	5.1	46.6	74.0	-27.4	Peak	Horizontal
	12055.1	42.7	5.2	47.9	74.0	-26.1	Peak	Horizontal
*	13129.5	44.1	4.8	48.9	88.2	-39.3	Peak	Horizontal
*	10219.1	40.1	6.0	46.1	88.2	-42.1	Peak	Vertical
	11475.4	41.5	5.4	46.9	74.0	-27.1	Peak	Vertical
	12578.7	44.1	5.2	49.3	74.0	-24.7	Peak	Vertical
*	14042.4	43.7	5.4	49.1	88.2	-39.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-08-01
Test Mode	802.11ax-HE40 (Switch off)	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10129.0	39.5	5.9	45.4	88.2	-42.8	Peak	Horizontal
	10982.4	41.0	5.1	46.1	74.0	-27.9	Peak	Horizontal
	11992.2	42.1	5.1	47.2	74.0	-26.8	Peak	Horizontal
*	12876.2	42.7	5.4	48.1	88.2	-40.1	Peak	Horizontal
	10924.6	40.6	5.2	45.7	74.0	-28.3	Peak	Vertical
	11863.0	42.2	4.9	47.1	74.0	-26.9	Peak	Vertical
*	13039.4	42.5	4.9	47.4	88.2	-40.8	Peak	Vertical
*	14584.7	44.7	5.7	50.4	88.2	-37.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-08-01
Test Mode	802.11ax-HE80 (Switch off)	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10215.7	40.6	6.0	46.6	88.2	-41.6	Peak	Horizontal
	10868.5	40.4	5.2	45.6	74.0	-28.4	Peak	Horizontal
	11694.7	42.2	4.8	47.0	74.0	-27.0	Peak	Horizontal
*	13896.2	45.3	5.0	50.3	88.2	-37.9	Peak	Horizontal
*	8854.0	40.3	6.4	46.7	88.2	-41.5	Peak	Vertical
	11376.8	40.8	5.5	46.3	74.0	-27.8	Peak	Vertical
	12106.1	42.3	5.1	47.4	74.0	-26.6	Peak	Vertical
*	12804.8	43.1	5.5	48.6	88.2	-39.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-08-01
Test Mode	802.11ax-HE80 (Switch off)	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9887.6	39.9	6.1	46.0	88.2	-42.2	Peak	Horizontal
	11662.4	41.8	4.9	46.7	74.0	-27.3	Peak	Horizontal
	12672.2	42.5	5.5	48.0	74.0	-26.0	Peak	Horizontal
*	13597.0	44.3	4.5	48.9	88.2	-39.4	Peak	Horizontal
	11358.1	41.3	5.5	46.8	74.0	-27.2	Peak	Vertical
	11823.9	42.1	4.9	47.0	74.0	-27.0	Peak	Vertical
*	13221.3	45.3	5.0	50.3	88.2	-37.9	Peak	Vertical
*	14200.5	45.0	5.5	50.5	88.2	-37.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-08-01
Test Mode	802.11ax-HE80 (Switch off)	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10215.7	39.9	6.0	45.9	88.2	-42.3	Peak	Horizontal
	11176.2	41.3	5.2	46.5	74.0	-27.5	Peak	Horizontal
*	12111.2	41.8	5.0	46.8	74.0	-27.2	Peak	Horizontal
*	14035.6	43.4	5.4	48.8	88.2	-39.4	Peak	Horizontal
*	10236.1	40.2	5.9	46.0	88.2	-42.2	Peak	Vertical
	11167.7	41.9	5.2	47.1	74.0	-26.9	Peak	Vertical
	11937.8	41.6	5.0	46.6	74.0	-27.4	Peak	Vertical
*	13763.6	44.0	4.9	48.9	88.2	-39.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-08-01
Test Mode	802.11ax-HE80 (Switch off)	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11443.1	41.3	5.3	46.6	74.0	-27.4	Peak	Horizontal
	12084.0	42.4	5.2	47.6	74.0	-26.4	Peak	Horizontal
*	13143.1	43.8	4.9	48.7	88.2	-39.5	Peak	Horizontal
*	14071.3	43.7	5.4	49.1	88.2	-39.1	Peak	Horizontal
*	10006.6	40.1	5.9	46.0	88.2	-42.2	Peak	Vertical
	11023.2	41.5	5.1	46.5	74.0	-27.5	Peak	Vertical
	12053.4	43.3	5.2	48.5	74.0	-25.6	Peak	Vertical
*	13952.3	44.1	5.1	49.2	88.2	-39.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-08-01
Test Mode	802.11ax-HE80 (Switch off)	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10219.1	41.3	6.0	47.3	88.2	-40.9	Peak	Horizontal
	11529.8	41.3	5.1	46.4	74.0	-27.6	Peak	Horizontal
	11992.2	41.9	5.1	47.0	74.0	-27.0	Peak	Horizontal
*	12842.2	43.8	5.5	49.3	88.2	-38.9	Peak	Horizontal
	11310.5	41.5	5.4	46.9	74.0	-27.1	Peak	Vertical
	11976.9	41.8	5.2	47.0	74.0	-27.0	Peak	Vertical
*	12881.3	42.5	5.4	47.9	88.2	-40.4	Peak	Vertical
*	15040.3	45.0	5.8	50.7	88.2	-37.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-08-01
Test Mode	802.11ax-HE80 (Switch off)	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10176.6	40.3	5.9	46.2	88.2	-42.1	Peak	Horizontal
	11310.5	41.5	5.4	46.9	74.0	-27.1	Peak	Horizontal
	12282.9	43.0	4.9	47.9	74.0	-26.1	Peak	Horizontal
*	12951.0	42.6	5.1	47.7	88.2	-40.5	Peak	Horizontal
*	10103.5	39.5	5.9	45.4	88.2	-42.8	Peak	Vertical
	11198.3	40.5	5.3	45.8	74.0	-28.2	Peak	Vertical
	11956.5	41.8	5.2	47.0	74.0	-27.0	Peak	Vertical
*	14319.5	43.0	5.7	48.7	88.2	-39.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-08-01
Test Mode	802.11ax-HE160 (Switch off)	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10217.4	40.4	6.0	46.4	88.2	-41.8	Peak	Horizontal
	11626.7	41.4	5.0	46.3	74.0	-27.7	Peak	Horizontal
	12050.0	42.0	5.2	47.2	74.0	-26.8	Peak	Horizontal
*	13935.3	43.5	5.3	48.7	88.2	-39.5	Peak	Horizontal
*	9821.3	39.4	6.2	45.6	88.2	-42.7	Peak	Vertical
	10712.1	39.5	5.3	44.8	74.0	-29.2	Peak	Vertical
	11781.4	42.2	4.8	47.0	74.0	-27.0	Peak	Vertical
*	12979.9	43.3	5.1	48.4	88.2	-39.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-08-01
Test Mode	802.11ax-HE160 (Switch off)	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9999.8	39.1	5.9	44.9	88.2	-43.3	Peak	Horizontal
	10962.0	40.9	5.0	45.9	74.0	-28.1	Peak	Horizontal
	11524.7	43.2	5.1	48.4	74.0	-25.6	Peak	Horizontal
*	12923.8	42.7	5.2	47.9	88.2	-40.3	Peak	Horizontal
*	9950.5	39.2	6.1	45.3	88.2	-42.9	Peak	Vertical
	11074.2	41.1	5.1	46.1	74.0	-27.9	Peak	Vertical
	12021.1	42.1	5.0	47.1	74.0	-26.9	Peak	Vertical
*	12969.7	42.7	5.2	47.9	88.2	-40.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-08-01
Test Mode	802.11ax-HE160 (Switch off)	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10237.8	40.0	5.9	45.9	88.2	-42.3	Peak	Horizontal
	11132.0	42.3	5.2	47.5	74.0	-26.5	Peak	Horizontal
	12080.6	42.1	5.2	47.2	74.0	-26.8	Peak	Horizontal
*	13066.6	42.9	5.0	47.8	88.2	-40.4	Peak	Horizontal
*	9846.8	39.5	6.2	45.7	88.2	-42.5	Peak	Vertical
	11121.8	41.3	5.1	46.4	74.0	-27.6	Peak	Vertical
	12332.2	43.0	4.7	47.6	74.0	-26.4	Peak	Vertical
*	12888.1	43.2	5.3	48.5	88.2	-39.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-08-01
Test Mode	802.11ax-HE160 (Switch off)	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11517.9	40.6	5.2	45.8	74.0	-28.2	Peak	Horizontal
	12327.1	42.3	4.7	47.0	74.0	-27.0	Peak	Horizontal
*	13947.2	43.7	5.1	48.8	88.2	-39.4	Peak	Horizontal
*	14591.5	45.5	5.7	51.1	88.2	-37.1	Peak	Horizontal
*	10117.1	39.5	5.8	45.4	88.2	-42.8	Peak	Vertical
	11395.5	41.1	5.5	46.6	74.0	-27.4	Peak	Vertical
	11830.7	42.0	5.0	47.0	74.0	-27.0	Peak	Vertical
*	14953.6	44.7	5.7	50.5	88.2	-37.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-07-25
Test Mode	802.11ax-HE20 (Switch on)	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10327.9	41.5	5.6	47.2	88.2	-41.0	Peak	Horizontal
	11222.1	43.0	5.3	48.3	74.0	-25.7	Peak	Horizontal
	12189.4	43.7	5.0	48.7	74.0	-25.3	Peak	Horizontal
*	14515.0	45.5	5.8	51.2	88.2	-37.0	Peak	Horizontal
*	10224.2	41.0	5.9	47.0	88.2	-41.2	Peak	Vertical
	10778.4	42.4	5.3	47.7	74.0	-26.3	Peak	Vertical
	12257.4	43.9	4.8	48.7	74.0	-25.3	Peak	Vertical
*	14124.0	44.4	5.4	49.8	88.2	-38.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-07-25
Test Mode	802.11ax-HE20 (Switch on)	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11630.1	42.5	5.0	47.4	74.0	-26.6	Peak	Horizontal
	12291.4	43.0	4.9	47.9	74.0	-26.1	Peak	Horizontal
*	14188.6	45.0	5.5	50.4	88.2	-37.8	Peak	Horizontal
*	16708.0	47.1	4.2	51.3	88.2	-36.9	Peak	Horizontal
*	10173.2	40.7	5.9	46.6	88.2	-41.6	Peak	Vertical
	11477.1	41.9	5.4	47.4	74.0	-26.6	Peak	Vertical
	11823.9	43.1	4.9	48.1	74.0	-25.9	Peak	Vertical
*	12843.9	43.5	5.5	49.0	88.2	-39.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-07-25
Test Mode	802.11ax-HE20 (Switch on)	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9930.1	40.4	6.0	46.4	88.2	-41.8	Peak	Horizontal
	11523.0	43.0	5.2	48.2	74.0	-25.8	Peak	Horizontal
	12271.0	43.0	4.8	47.8	74.0	-26.2	Peak	Horizontal
*	15036.9	45.7	5.7	51.4	88.2	-36.8	Peak	Horizontal
*	9906.3	41.3	6.1	47.4	88.2	-40.8	Peak	Vertical
	11385.3	41.0	5.5	46.5	74.0	-27.5	Peak	Vertical
	12298.2	42.8	4.8	47.6	74.0	-26.4	Peak	Vertical
*	15052.2	45.5	5.7	51.2	88.2	-37.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-07-25
Test Mode	802.11ax-HE20 (Switch on)	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9933.5	40.5	6.0	46.5	88.2	-41.7	Peak	Horizontal
	11181.3	42.3	5.2	47.5	74.0	-26.5	Peak	Horizontal
	11883.4	42.4	5.0	47.3	74.0	-26.7	Peak	Horizontal
*	15043.7	45.6	5.8	51.4	88.2	-36.9	Peak	Horizontal
*	10224.2	40.6	5.9	46.5	88.2	-41.7	Peak	Vertical
	11490.7	41.8	5.3	47.2	74.0	-26.9	Peak	Vertical
	12214.9	43.0	4.9	47.9	74.0	-26.1	Peak	Vertical
*	14091.7	44.0	5.5	49.5	88.2	-38.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-07-25
Test Mode	802.11ax-HE20 (Switch on)	Test Channel	153
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9868.9	40.2	6.2	46.4	88.2	-41.8	Peak	Horizontal
	11373.4	41.5	5.5	46.9	74.0	-27.1	Peak	Horizontal
	11830.7	43.0	5.0	47.9	74.0	-26.1	Peak	Horizontal
*	13132.9	44.0	4.8	48.8	88.2	-39.4	Peak	Horizontal
*	9950.5	40.3	6.1	46.4	88.2	-41.8	Peak	Vertical
	11614.8	42.4	5.0	47.3	74.0	-26.7	Peak	Vertical
	11963.3	43.7	5.2	48.9	74.0	-25.2	Peak	Vertical
*	13114.2	45.3	4.8	50.1	88.2	-38.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-07-25
Test Mode	802.11ax-HE20 (Switch on)	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11186.4	41.9	5.2	47.1	74.0	-26.9	Peak	Horizontal
	12027.9	43.1	5.1	48.1	74.0	-25.9	Peak	Horizontal
*	13071.7	45.7	5.0	50.6	88.2	-37.6	Peak	Horizontal
*	16585.6	46.5	4.7	51.2	88.2	-37.0	Peak	Horizontal
	11415.9	41.7	5.4	47.1	74.0	-26.9	Peak	Vertical
	12206.4	42.7	4.9	47.6	74.0	-26.4	Peak	Vertical
*	14040.7	44.0	5.4	49.5	88.2	-38.7	Peak	Vertical
*	15076.0	45.6	5.9	51.6	88.2	-36.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-07-25
Test Mode	802.11ax-HE40 (Switch on)	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9858.7	40.2	6.3	46.4	88.2	-41.8	Peak	Horizontal
	11745.7	43.0	4.8	47.8	74.0	-26.2	Peak	Horizontal
	12238.7	42.9	4.8	47.6	74.0	-26.4	Peak	Horizontal
*	14107.0	45.3	5.3	50.6	88.2	-37.6	Peak	Horizontal
	11415.9	41.5	5.4	46.9	74.0	-27.1	Peak	Vertical
	12303.3	44.1	4.7	48.8	74.0	-25.2	Peak	Vertical
*	13092.1	43.7	4.9	48.6	88.2	-39.6	Peak	Vertical
*	15030.1	46.2	5.7	51.8	88.2	-36.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-07-25
Test Mode	802.11ax-HE40 (Switch on)	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9763.5	40.1	6.1	46.2	88.2	-42.0	Peak	Horizontal
	11069.1	41.1	5.1	46.2	74.0	-27.8	Peak	Horizontal
	12019.4	42.5	5.0	47.5	74.0	-26.5	Peak	Horizontal
*	13547.7	45.3	4.9	50.2	88.2	-38.0	Peak	Horizontal
*	10030.4	40.2	6.0	46.2	88.2	-42.0	Peak	Vertical
	11174.5	41.8	5.2	47.0	74.0	-27.0	Peak	Vertical
	11857.9	43.0	4.9	47.9	74.0	-26.1	Peak	Vertical
*	14016.9	43.9	5.4	49.3	88.2	-38.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-07-25
Test Mode	802.11ax-HE40 (Switch on)	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10336.4	41.3	5.7	47.0	88.2	-41.2	Peak	Horizontal
	11387.0	41.3	5.4	46.7	74.0	-27.3	Peak	Horizontal
	11951.4	42.1	5.2	47.3	74.0	-26.7	Peak	Horizontal
*	12704.5	44.5	5.5	49.9	88.2	-38.3	Peak	Horizontal
*	10086.5	40.7	5.9	46.6	88.2	-41.7	Peak	Vertical
	11866.4	42.5	4.9	47.4	74.0	-26.6	Peak	Vertical
	12373.0	43.7	4.7	48.5	74.0	-25.5	Peak	Vertical
*	14161.4	44.9	5.6	50.5	88.2	-37.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-07-25
Test Mode	802.11ax-HE40 (Switch on)	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10074.6	40.4	5.9	46.3	88.2	-41.9	Peak	Horizontal
	11228.9	40.9	5.3	46.2	74.0	-27.8	Peak	Horizontal
	12017.7	42.3	5.0	47.3	74.0	-26.8	Peak	Horizontal
*	13914.9	45.0	5.2	50.2	88.2	-38.0	Peak	Horizontal
*	9981.1	40.7	6.0	46.6	88.2	-41.6	Peak	Vertical
	10829.4	42.4	5.3	47.7	74.0	-26.4	Peak	Vertical
	12197.9	43.0	5.0	47.9	74.0	-26.1	Peak	Vertical
*	13202.6	44.1	5.0	49.1	88.2	-39.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-07-25
Test Mode	802.11ax-HE40 (Switch on)	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9976.0	40.7	5.9	46.7	88.2	-41.5	Peak	Horizontal
	11662.4	42.7	4.9	47.5	74.0	-26.5	Peak	Horizontal
	12082.3	43.2	5.2	48.4	74.0	-25.6	Peak	Horizontal
*	13789.1	44.4	4.8	49.2	88.2	-39.0	Peak	Horizontal
*	10202.1	40.4	5.9	46.2	88.2	-42.0	Peak	Vertical
	11358.1	41.7	5.5	47.2	74.0	-26.8	Peak	Vertical
	11959.9	42.3	5.2	47.5	74.0	-26.5	Peak	Vertical
*	12806.5	43.2	5.5	48.7	88.2	-39.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-07-25
Test Mode	802.11ax-HE40 (Switch on)	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8978.1	41.0	6.6	47.6	88.2	-40.6	Peak	Horizontal
*	10021.9	40.4	5.9	46.4	88.2	-41.8	Peak	Horizontal
	11533.2	42.6	5.1	47.7	74.0	-26.3	Peak	Horizontal
	12206.4	44.0	4.9	48.9	74.0	-25.1	Peak	Horizontal
*	10365.3	40.6	5.6	46.2	88.2	-42.0	Peak	Vertical
	11834.1	42.4	5.0	47.4	74.0	-26.6	Peak	Vertical
	12260.8	43.2	4.8	48.0	74.0	-26.0	Peak	Vertical
*	13168.6	43.8	4.9	48.7	88.2	-39.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-07-25
Test Mode	802.11ax-HE80 (Switch on)	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10016.8	40.8	5.9	46.7	88.2	-41.5	Peak	Horizontal
	11341.1	41.7	5.5	47.2	74.0	-26.8	Peak	Horizontal
	12284.6	43.4	5.0	48.3	74.0	-25.7	Peak	Horizontal
*	13070.0	44.2	5.0	49.1	88.2	-39.1	Peak	Horizontal
*	9981.1	40.0	6.0	46.0	88.2	-42.2	Peak	Vertical
	11257.8	41.9	5.4	47.3	74.0	-26.8	Peak	Vertical
	12085.7	43.7	5.2	48.9	74.0	-25.1	Peak	Vertical
*	14018.6	43.6	5.5	49.1	88.2	-39.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-07-25
Test Mode	802.11ax-HE80 (Switch on)	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10997.7	42.0	5.1	47.1	74.0	-26.9	Peak	Horizontal
	11871.5	43.4	5.0	48.4	74.0	-25.6	Peak	Horizontal
*	14122.3	44.4	5.4	49.8	88.2	-38.4	Peak	Horizontal
*	14904.3	45.6	5.8	51.4	88.2	-36.8	Peak	Horizontal
*	10134.1	41.2	5.9	47.0	88.2	-41.2	Peak	Vertical
	11375.1	42.0	5.5	47.4	74.0	-26.6	Peak	Vertical
	12087.4	42.8	5.2	48.0	74.0	-26.0	Peak	Vertical
*	13189.0	44.8	4.9	49.7	88.2	-38.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-07-25
Test Mode	802.11ax-HE80 (Switch on)	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10215.7	40.2	6.0	46.2	88.2	-42.0	Peak	Horizontal
	11109.9	43.1	5.0	48.1	74.0	-25.9	Peak	Horizontal
	12104.4	42.8	5.1	47.9	74.0	-26.1	Peak	Horizontal
*	14013.5	44.0	5.4	49.4	88.2	-38.8	Peak	Horizontal
	11472.0	41.3	5.4	46.7	74.0	-27.3	Peak	Vertical
	12070.4	42.9	5.1	48.0	74.0	-26.0	Peak	Vertical
*	12973.1	43.5	5.2	48.7	88.2	-39.5	Peak	Vertical
*	13996.5	43.6	5.3	48.9	88.2	-39.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-07-25
Test Mode	802.11ax-HE80 (Switch on)	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10186.8	40.4	5.8	46.3	88.2	-41.9	Peak	Horizontal
	10968.8	41.0	5.0	46.0	74.0	-28.0	Peak	Horizontal
	12077.2	42.2	5.1	47.4	74.0	-26.6	Peak	Horizontal
*	13146.5	43.3	4.9	48.2	88.2	-40.1	Peak	Horizontal
	11483.9	43.0	5.4	48.4	74.0	-25.6	Peak	Vertical
	12058.5	43.1	5.1	48.2	74.0	-25.8	Peak	Vertical
*	12966.3	43.3	5.2	48.5	88.2	-39.7	Peak	Vertical
*	14946.8	45.7	5.8	51.4	88.2	-36.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-07-25
Test Mode	802.11ax-HE80 (Switch on)	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11230.6	41.4	5.3	46.7	74.0	-27.3	Peak	Horizontal
	11873.2	42.8	5.0	47.8	74.0	-26.2	Peak	Horizontal
*	14115.5	44.6	5.4	49.9	88.2	-38.3	Peak	Horizontal
*	14809.1	45.3	5.7	51.0	88.2	-37.2	Peak	Horizontal
*	9930.1	40.5	6.0	46.5	88.2	-41.7	Peak	Vertical
	11415.9	42.3	5.4	47.8	74.0	-26.2	Peak	Vertical
	12051.7	42.6	5.2	47.8	74.0	-26.2	Peak	Vertical
*	12857.5	43.7	5.5	49.1	88.2	-39.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-07-25
Test Mode	802.11ax-HE80 (Switch on)	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10832.8	41.7	5.3	47.0	74.0	-27.0	Peak	Horizontal
	12046.6	43.0	5.2	48.2	74.0	-25.8	Peak	Horizontal
*	13076.8	43.7	5.0	48.6	88.2	-39.6	Peak	Horizontal
*	15048.8	45.6	5.7	51.4	88.2	-36.8	Peak	Horizontal
*	10304.1	40.4	5.7	46.1	88.2	-42.1	Peak	Vertical
	11244.2	42.7	5.3	48.0	74.0	-26.0	Peak	Vertical
	12039.8	43.8	5.2	48.9	74.0	-25.1	Peak	Vertical
*	14987.6	45.9	5.8	51.7	88.2	-36.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-07-25
Test Mode	802.11ax-HE160 (Switch on)	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11279.9	41.3	5.3	46.6	74.0	-27.4	Peak	Horizontal
	12186.0	42.5	5.0	47.6	74.0	-26.4	Peak	Horizontal
*	13110.8	43.7	4.8	48.5	88.2	-39.7	Peak	Horizontal
*	13797.6	45.0	4.7	49.7	88.2	-38.5	Peak	Horizontal
*	9940.3	41.2	6.0	47.2	88.2	-41.0	Peak	Vertical
	10911.0	42.4	5.3	47.7	74.0	-26.3	Peak	Vertical
	11859.6	43.1	4.9	48.0	74.0	-26.0	Peak	Vertical
*	14933.2	46.7	5.6	52.3	88.2	-35.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-07-25
Test Mode	802.11ax-HE160 (Switch on)	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9846.7	40.3	6.2	46.5	88.2	-41.7	Peak	Horizontal
	11257.9	41.8	5.4	47.2	74.0	-26.8	Peak	Horizontal
	12262.5	43.2	4.8	48.0	74.0	-26.0	Peak	Horizontal
*	13092.1	44.5	4.9	49.4	88.2	-38.8	Peak	Horizontal
*	9991.3	41.1	5.9	47.1	88.2	-41.1	Peak	Vertical
	11499.2	42.4	5.3	47.6	74.0	-26.4	Peak	Vertical
	12034.7	42.7	5.1	47.8	74.0	-26.2	Peak	Vertical
*							Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-07-25
Test Mode	802.11ax-HE160 (Switch on)	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10402.7	42.0	5.7	47.6	88.2	-40.6	Peak	Horizontal
	11506.0	42.1	5.3	47.4	74.0	-26.6	Peak	Horizontal
	12242.1	44.0	4.8	48.7	74.0	-25.3	Peak	Horizontal
*	14100.2	43.8	5.5	49.3	88.2	-38.9	Peak	Horizontal
	11213.6	41.3	5.3	46.6	74.0	-27.4	Peak	Vertical
	12043.2	42.6	5.2	47.8	74.0	-26.2	Peak	Vertical
*	12937.4	43.8	5.2	49.0	88.2	-39.3	Peak	Vertical
*	14127.4	45.1	5.5	50.5	88.2	-37.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC2	Test Date	2024-07-25
Test Mode	802.11ax-HE160 (Switch on)	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9868.9	39.9	6.2	46.1	88.2	-42.1	Peak	Horizontal
	11038.5	41.6	5.1	46.6	74.0	-27.4	Peak	Horizontal
	11764.4	43.1	4.6	47.7	74.0	-26.3	Peak	Horizontal
*	14022.0	44.9	5.5	50.4	88.2	-37.8	Peak	Horizontal
	11497.5	42.2	5.3	47.5	74.0	-26.5	Peak	Vertical
	12192.8	44.2	5.0	49.1	74.0	-24.9	Peak	Vertical
*	13071.7	43.8	5.0	48.7	88.2	-39.5	Peak	Vertical
*	14192.0	44.0	5.5	49.4	88.2	-38.8	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site: WZ-AC1	Test Date: 2023-10-12
Limit: FCC_6G_RE(3m)	Engineer: Ajin Fan
Probe: FMZB1519_0.009-30MHz	Polarity: Coaxial
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5955MHz	

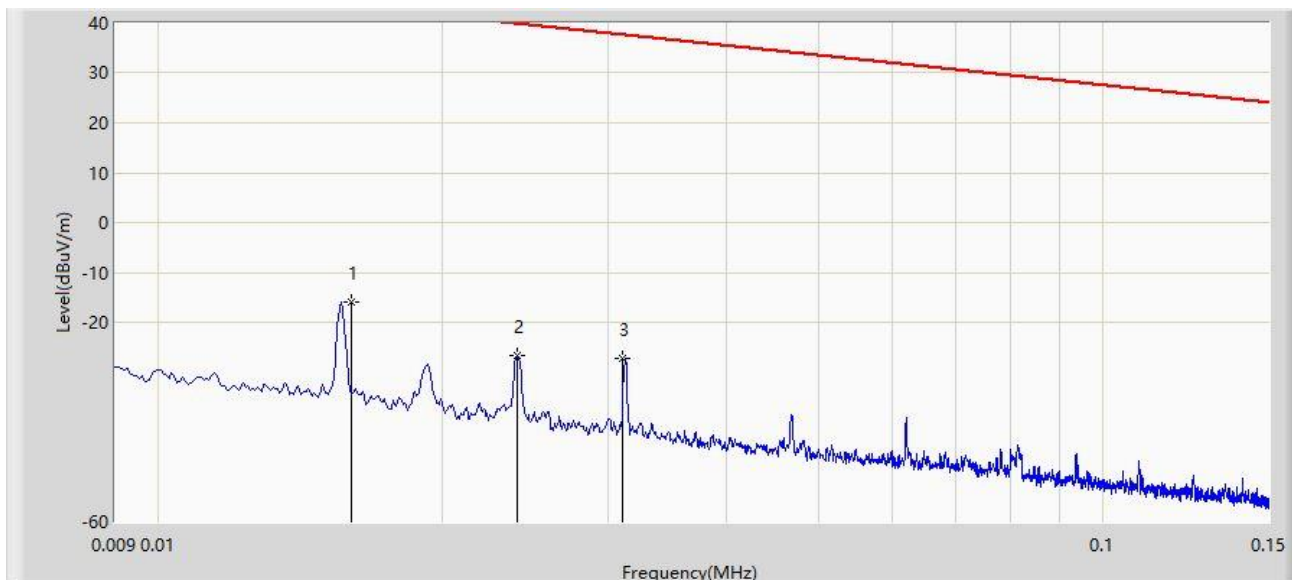

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	0.016	-15.865	64.099	-59.371	43.505	-79.964	PK
2		0.024	-26.727	53.235	-66.713	39.985	-79.962	PK
3		0.031	-27.117	52.844	-64.880	37.764	-79.961	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC1	Test Date: 2023-10-12
Limit: FCC_6G_RE(3m)	Engineer: Ajin Fan
Probe: FMZB1519_0.009-30MHz	Polarity: Coaxial
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5955MHz	

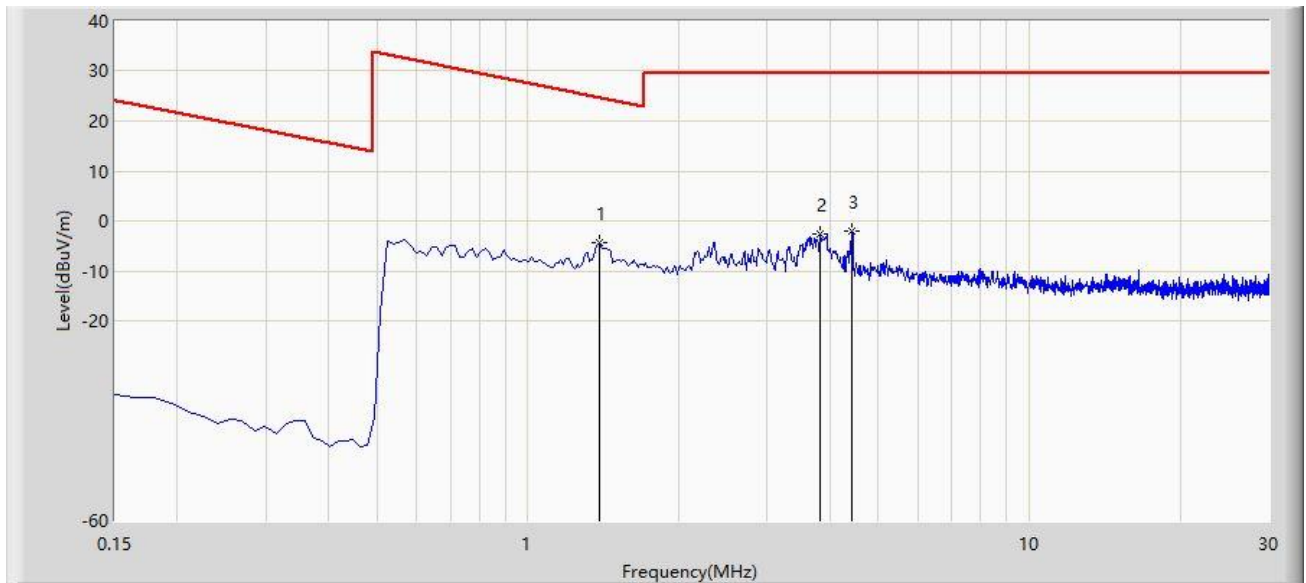

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	1.389	-4.319	35.479	-29.094	24.775	-39.798	PK
2		3.836	-2.607	37.150	-32.107	29.500	-39.757	PK
3		4.433	-2.151	37.588	-31.651	29.500	-39.739	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC1	Test Date: 2023-10-12
Limit: FCC_6G_RE(3m)	Engineer: Ajin Fan
Probe: FMZB1519_0.009-30MHz	Polarity: Coplanar
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5955MHz	

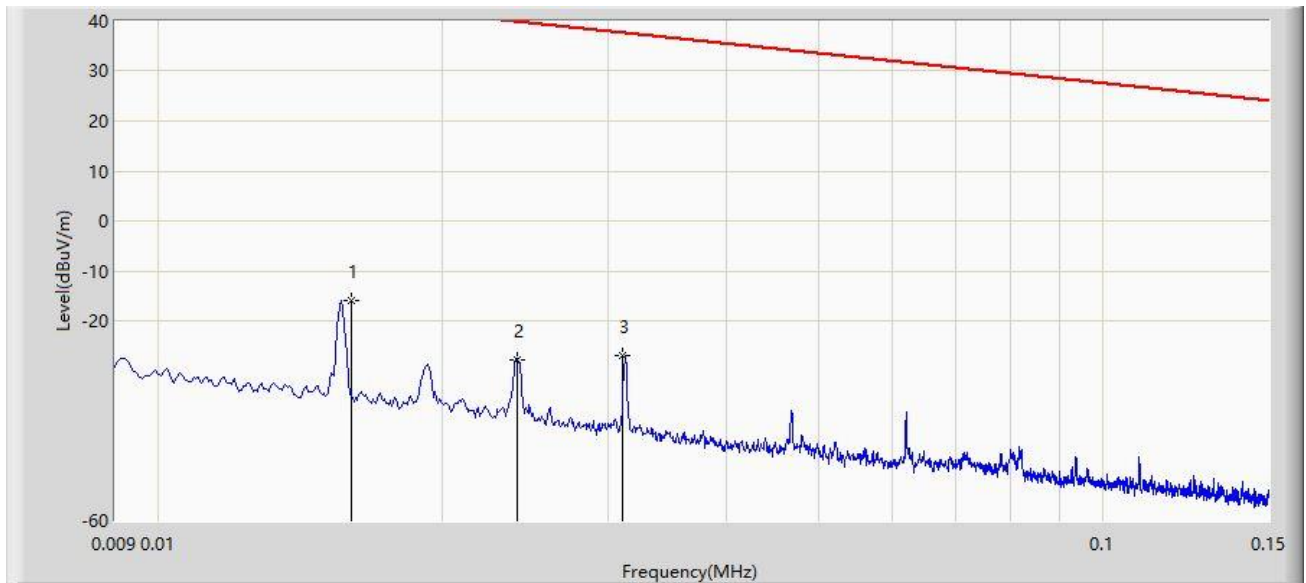

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	0.016	-15.892	64.072	-59.398	43.505	-79.964	PK
2		0.024	-27.846	52.116	-67.832	39.985	-79.962	PK
3		0.031	-27.026	52.935	-64.789	37.764	-79.961	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC1	Test Date: 2023-10-12
Limit: FCC_6G_RE(3m)	Engineer: Ajin Fan
Probe: FMZB1519_0.009-30MHz	Polarity: Coplanar
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5955MHz	

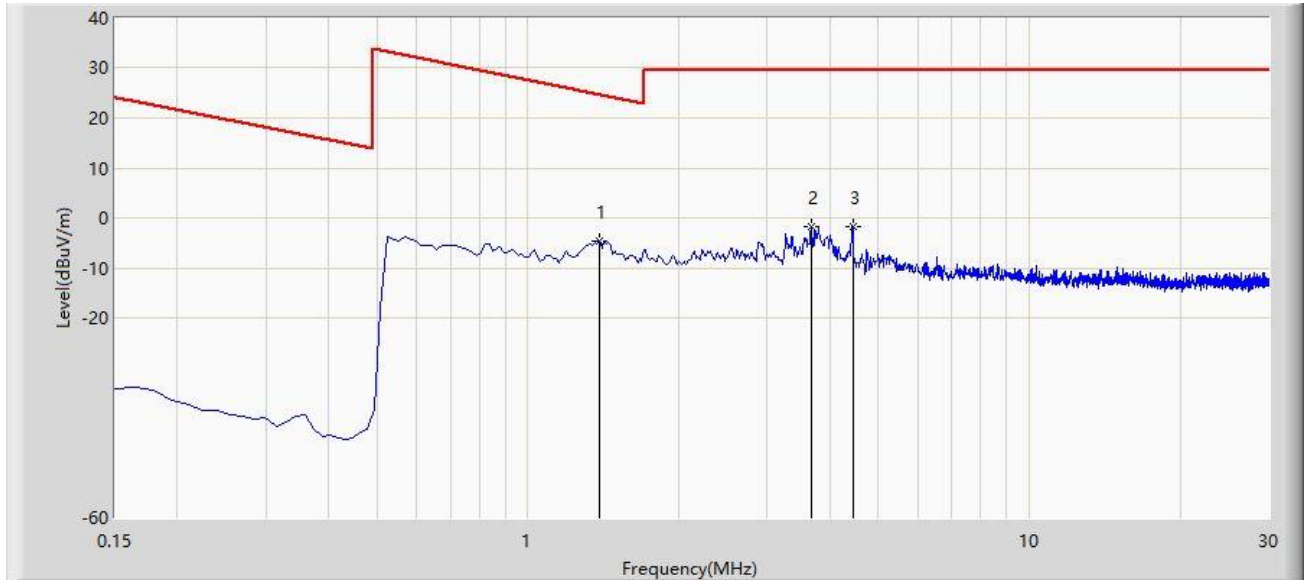

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	1.389	-4.537	35.261	-29.312	24.775	-39.798	PK
2		3.672	-1.800	37.963	-31.300	29.500	-39.763	PK
3		4.448	-1.792	37.947	-31.292	29.500	-39.739	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC1	Test Date: 2023-12-23
Limit: FCC_6G_RE(3m)	Engineer: Ajin Fan
Probe: VULB9162_30-7000MHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5955MHz	

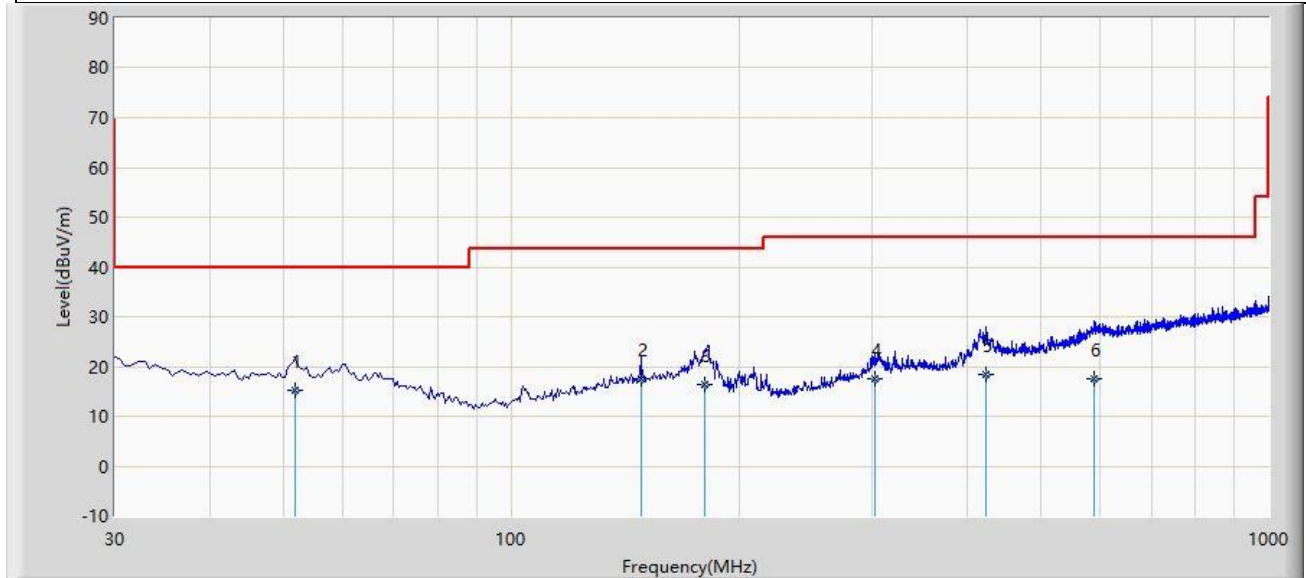

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	51.860	15.073	-3.500	-24.927	40.000	18.573	QP
2		148.340	17.654	-0.400	-25.846	43.500	18.055	QP
3		180.390	16.243	-0.600	-27.257	43.500	16.843	QP
4		301.750	17.544	-1.000	-28.456	46.000	18.543	QP
5		424.300	18.514	-3.100	-27.486	46.000	21.614	QP
6		589.200	17.588	-7.600	-28.412	46.000	25.188	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: WZ-AC1	Test Date: 2023-12-23
Limit: FCC_6G_RE(3m)	Engineer: Ajin Fan
Probe: VULB9162_30-7000MHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5955MHz	

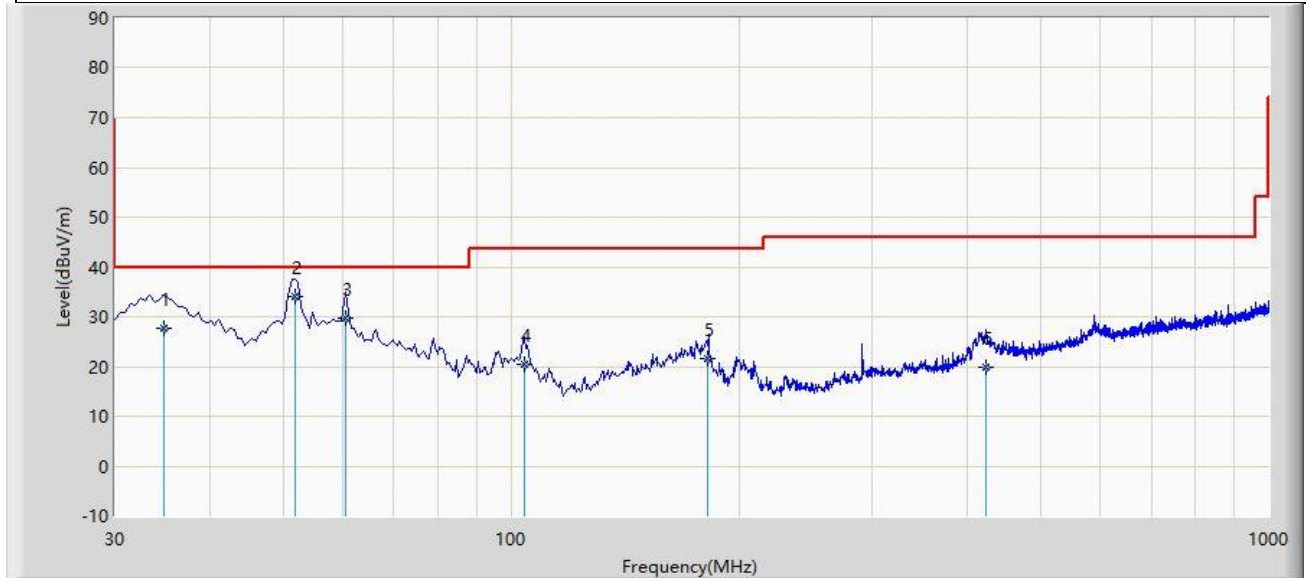

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		34.850	27.786	10.300	-12.214	40.000	17.487	QP
2	*	51.825	34.174	15.600	-5.826	40.000	18.574	QP
3		60.555	29.597	11.700	-10.403	40.000	17.897	QP
4		104.200	20.574	6.400	-22.926	43.500	14.174	QP
5		181.500	21.691	5.000	-21.809	43.500	16.690	QP
6		424.300	19.914	-1.700	-26.086	46.000	21.614	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: WZ-AC1	Test Date: 2023-09-23
Limit: FCC_6G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9170_933_18-40GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5955MHz	

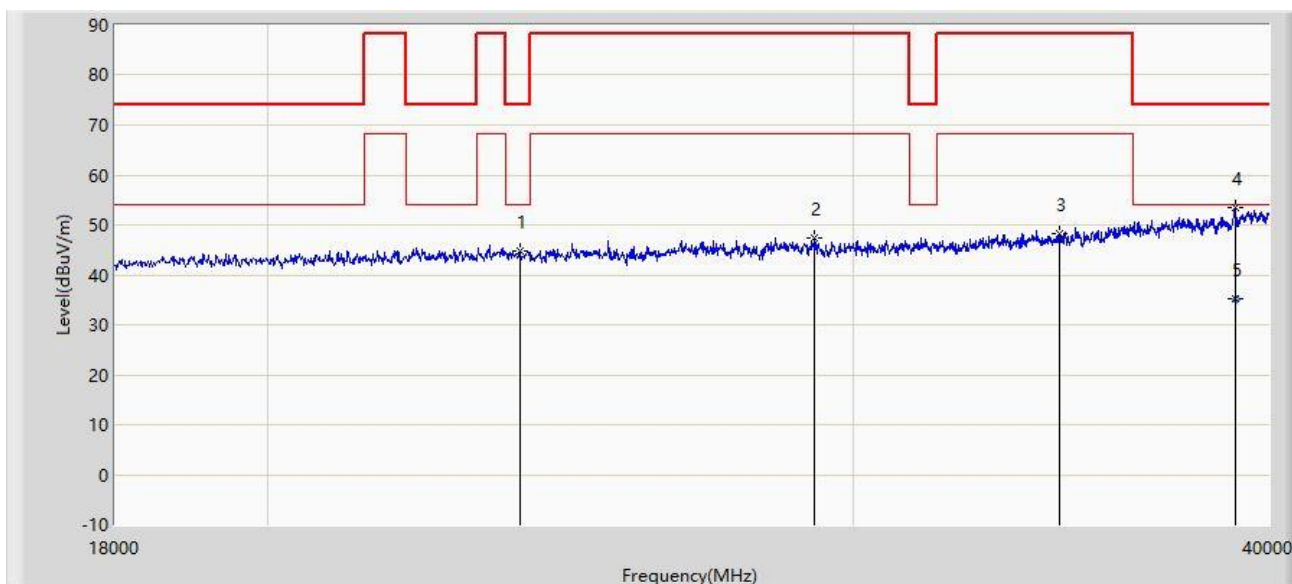

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		23819.000	44.723	51.811	-29.277	74.000	-7.088	PK
2		29220.000	47.468	55.009	-40.732	88.200	-7.541	PK
3		34599.000	48.389	54.675	-39.811	88.200	-6.286	PK
4		39087.000	53.363	54.825	-20.637	74.000	-1.462	PK
5	*	39087.000	35.078	36.540	-18.922	54.000	-1.462	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

Site: WZ-AC1	Test Date: 2023-09-23
Limit: FCC_6G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9170_933_18-40GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5825MHz	

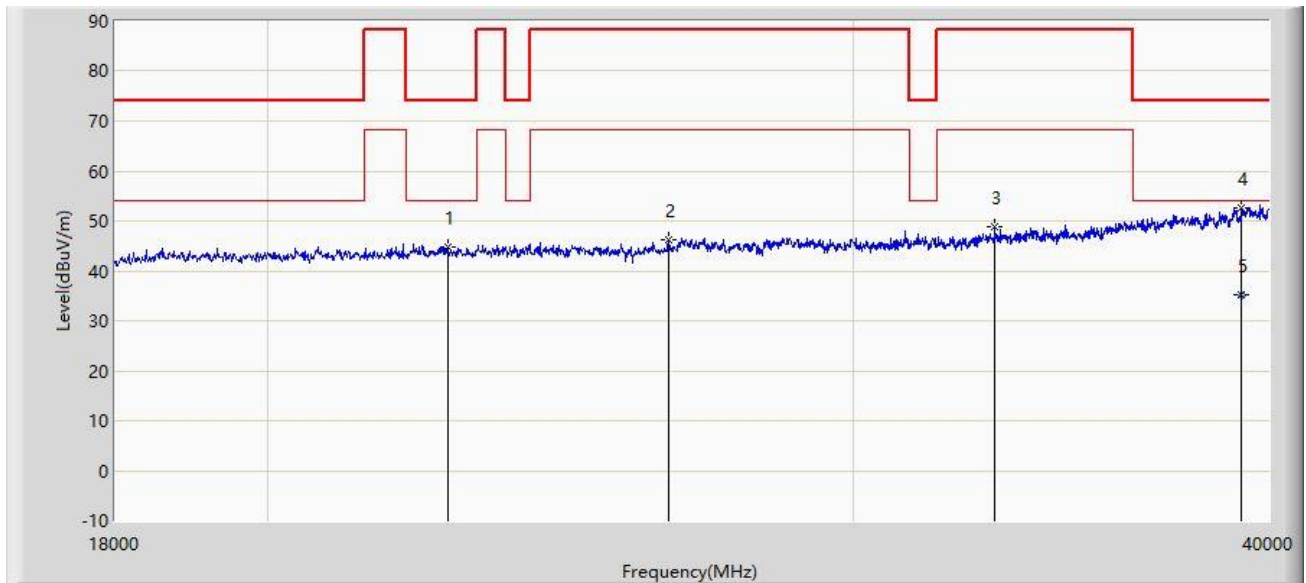

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		22664.000	44.903	52.568	-29.097	74.000	-7.665	PK
2		26404.000	46.342	52.530	-41.858	88.200	-6.188	PK
3		33103.000	48.865	54.604	-39.335	88.200	-5.739	PK
4		39241.000	52.616	53.912	-21.384	74.000	-1.296	PK
5	*	39241.000	35.354	36.650	-18.646	54.000	-1.296	AV

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

8. Radiated Restricted Band Edge Measurement Test Result

Site	WJ-AC2	Test Date	2024-08-01
Test Engineer	Carl Jiang	Temp./Humidity	26.7°C/64.3%
Factor	07105 1-18G	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz switch off		

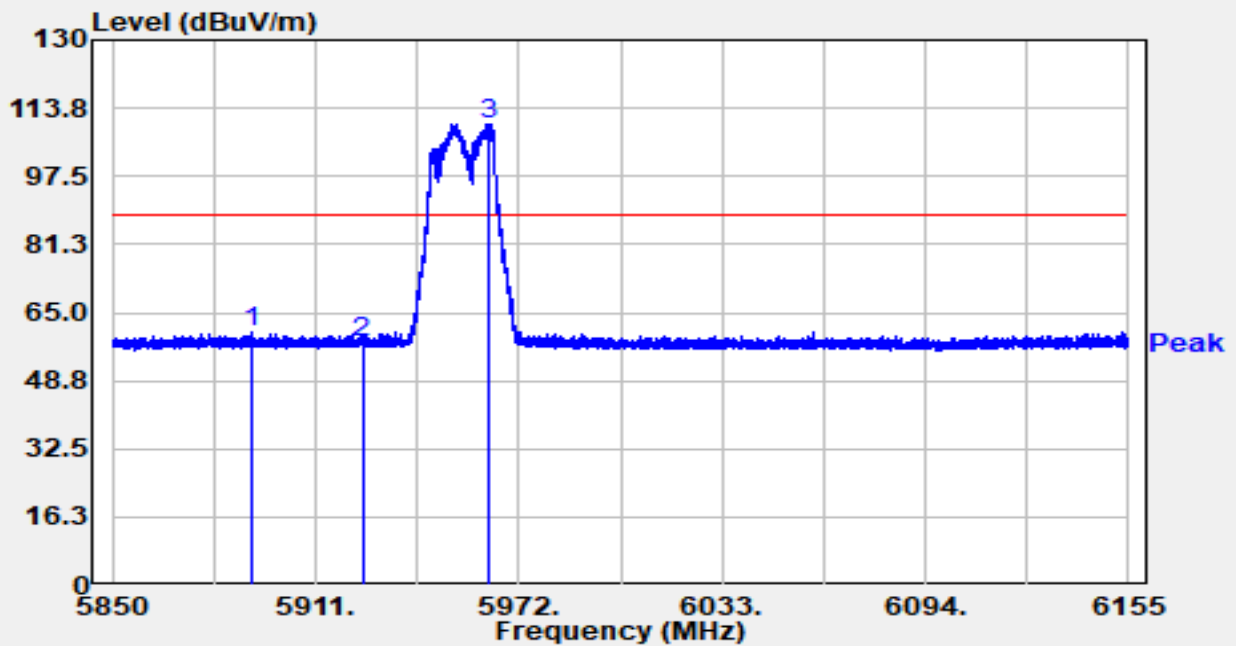


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5892.060	43.06	17.38	60.45	-27.75	88.20	Peak
2		5925.000	40.67	17.36	58.04	-30.16	88.20	Peak
3		5962.789	92.60	17.47	110.07	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-08-01
Test Engineer	Carl Jiang	Temp./Humidity	26.7°C/64.3%
Factor	07105 1-18G	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz switch off		

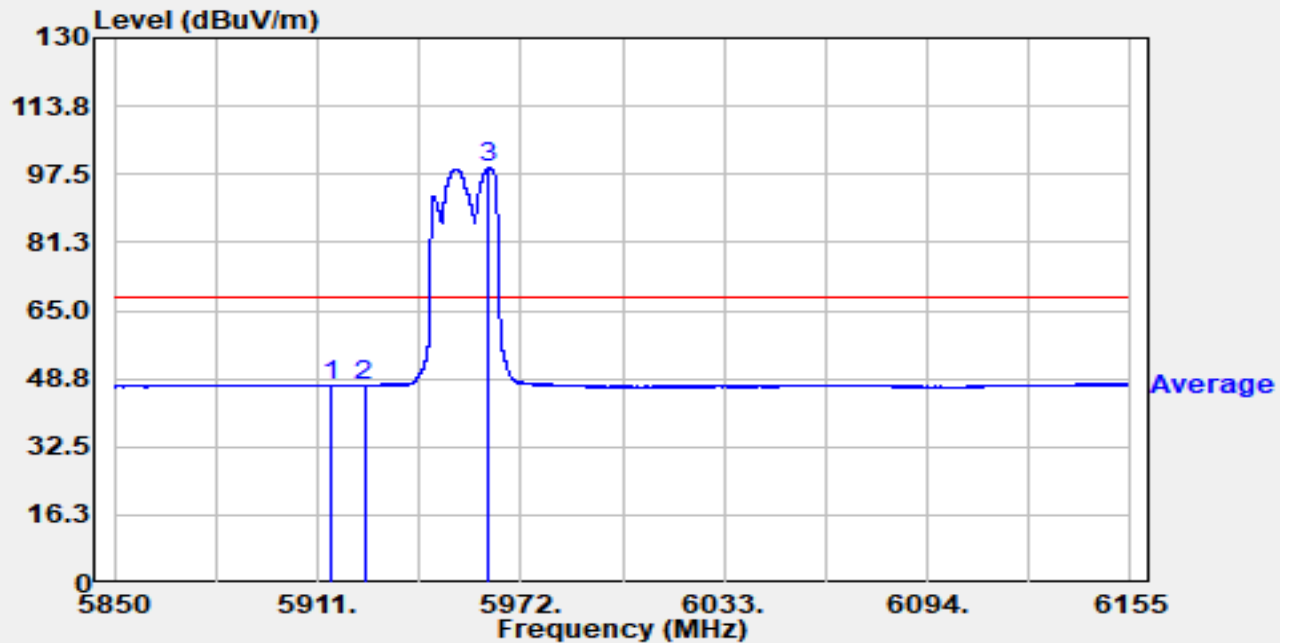


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5915.148	29.95	17.35	47.30	-20.90	68.20	Average
2		5925.000	29.74	17.36	47.10	-21.10	68.20	Average
3		5962.545	81.46	17.47	98.93	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-08-01
Test Engineer	Carl Jiang	Temp./Humidity	26.7°C/64.3%
Factor	07105 1-18G	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz switch off		

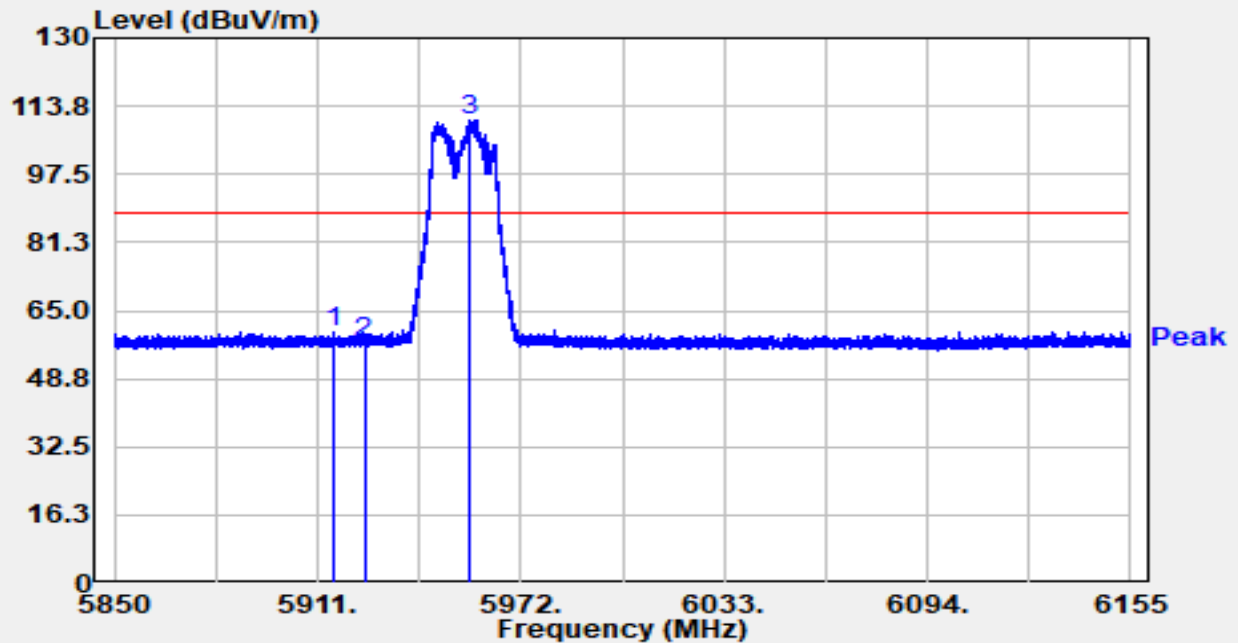


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5915.911	42.50	17.35	59.85	-28.35	88.20	Peak
2		5925.000	39.88	17.36	57.25	-30.95	88.20	Peak
3		5956.506	92.99	17.46	110.45	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-08-01
Test Engineer	Carl Jiang	Temp./Humidity	26.7°C/64.3%
Factor	07105 1-18G	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz switch off		

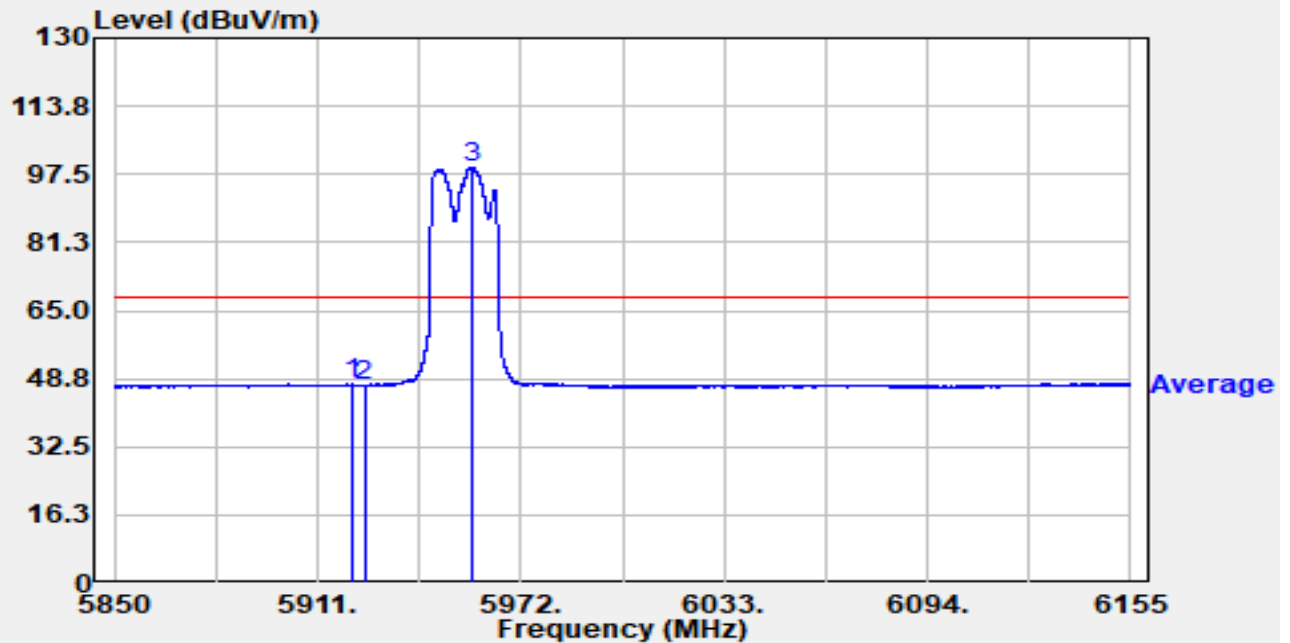


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.736	30.09	17.36	47.45	-20.75	68.20	Average
2		5925.000	29.77	17.36	47.14	-21.06	68.20	Average
3		5957.543	81.69	17.46	99.15	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-08-01
Test Engineer	Carl Jiang	Temp./Humidity	26.7°C/64.3%
Factor	07105 1-18G	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz switch off		

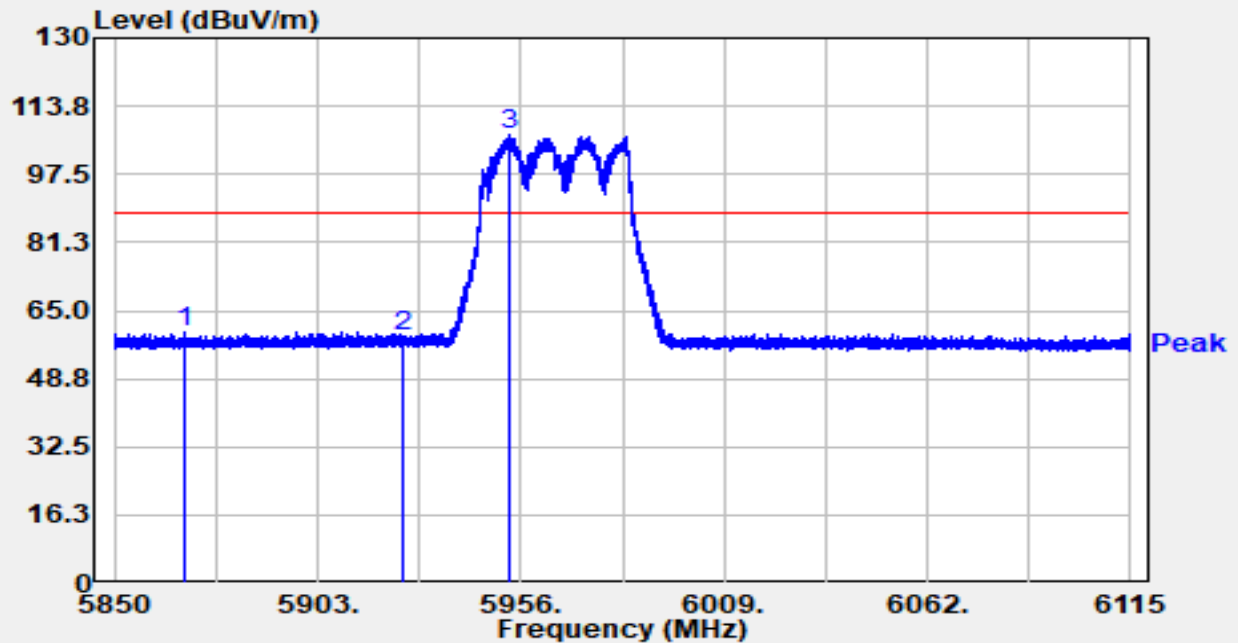


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5868.523	42.51	17.34	59.85	-28.35	88.20	Peak
2		5924.995	41.73	17.36	59.09	-29.11	88.20	Peak
3		5953.085	89.30	17.45	106.75	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-08-01
Test Engineer	Carl Jiang	Temp./Humidity	26.7°C/64.3%
Factor	07105 1-18G	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz switch off		

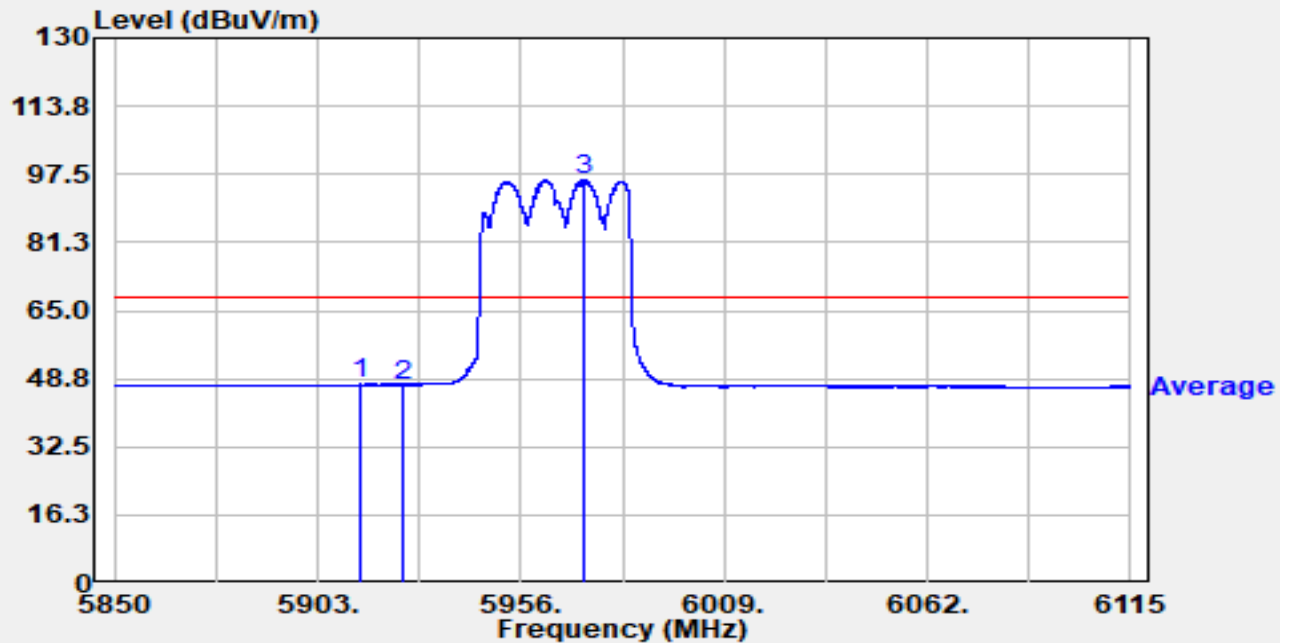


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5913.865	30.16	17.34	47.50	-20.70	68.20	Average
2		5924.995	29.96	17.36	47.33	-20.87	68.20	Average
3		5972.245	78.61	17.54	96.15	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-08-01
Test Engineer	Carl Jiang	Temp./Humidity	26.7°C/64.3%
Factor	07105 1-18G	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz switch off		

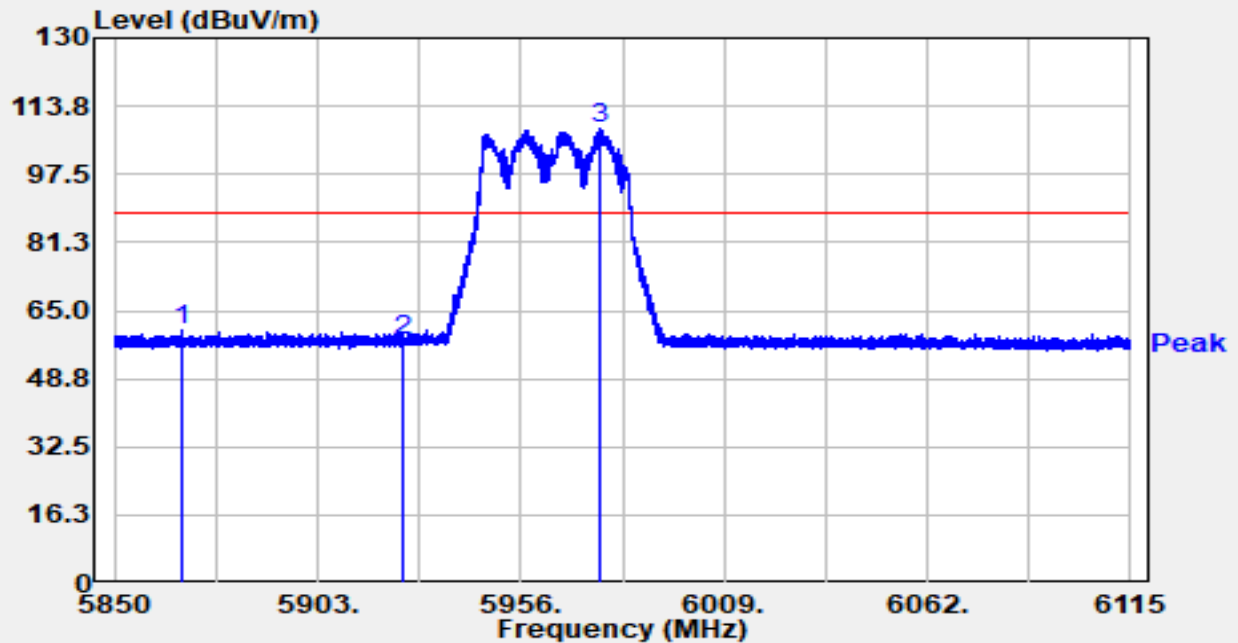


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5867.702	42.96	17.34	60.30	-27.90	88.20	Peak
2		5924.995	40.63	17.36	58.00	-30.20	88.20	Peak
3		5976.326	91.06	17.57	108.63	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-08-01
Test Engineer	Carl Jiang	Temp./Humidity	26.7°C/64.3%
Factor	07105 1-18G	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz switch off		

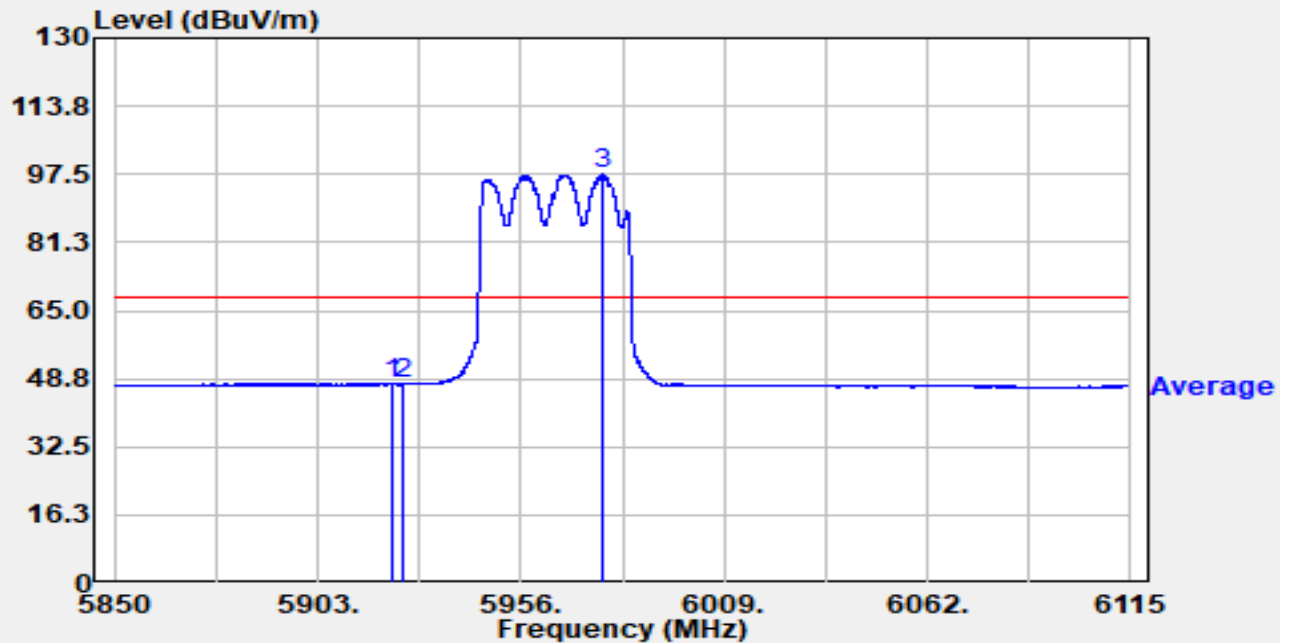


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.239	30.19	17.36	47.55	-20.65	68.20	Average
2		5924.995	30.17	17.36	47.53	-20.67	68.20	Average
3		5977.306	79.87	17.58	97.45	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-08-01
Test Engineer	Carl Jiang	Temp./Humidity	26.7°C/64.3%
Factor	07105 1-18G	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz switch off		

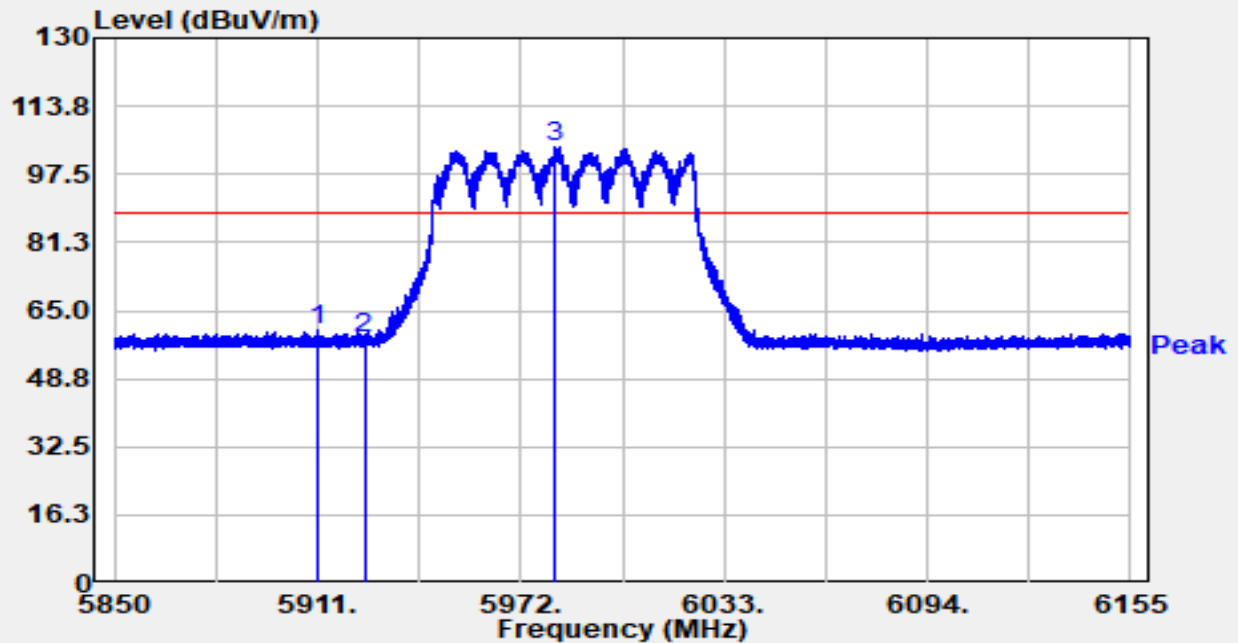


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5910.939	43.02	17.35	60.37	-27.83	88.20	Peak
2		5925.000	40.97	17.36	58.33	-29.87	88.20	Peak
3		5981.852	86.56	17.58	104.15	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-08-01
Test Engineer	Carl Jiang	Temp./Humidity	26.7°C/64.3%
Factor	07105 1-18G	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz switch off		

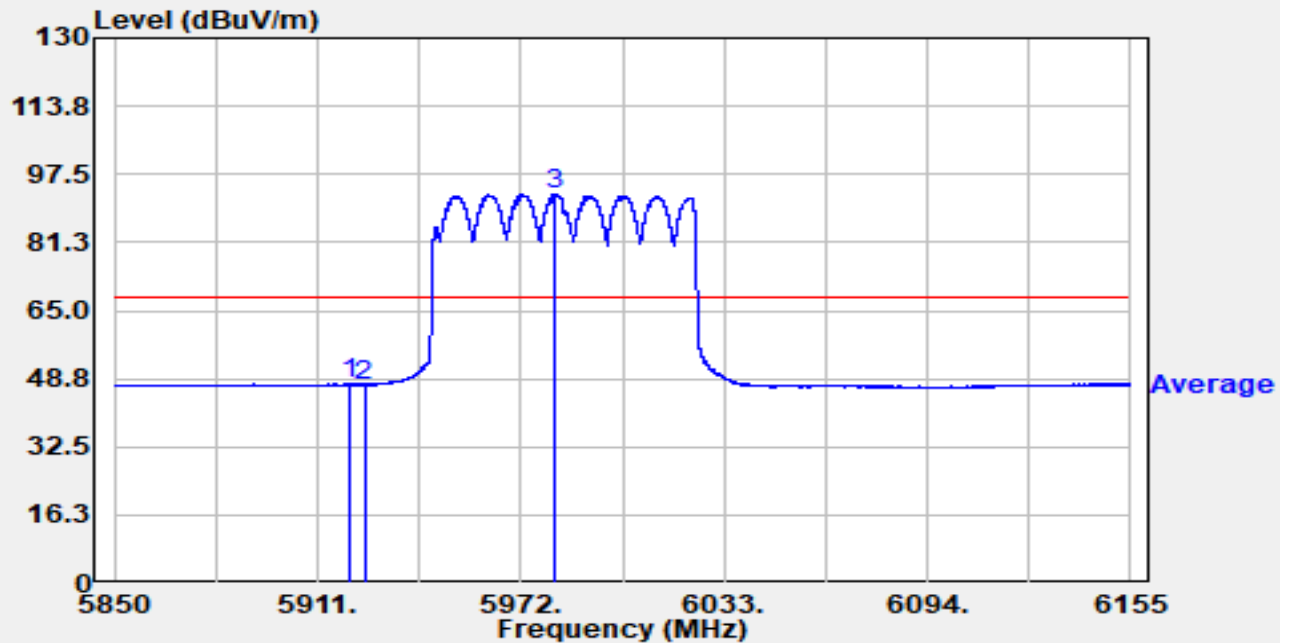


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.242	30.10	17.35	47.46	-20.74	68.20	Average
2		5925.000	29.95	17.36	47.31	-20.89	68.20	Average
3		5981.882	75.09	17.58	92.67	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-08-01
Test Engineer	Carl Jiang	Temp./Humidity	26.7°C/64.3%
Factor	07105 1-18G	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz switch off		

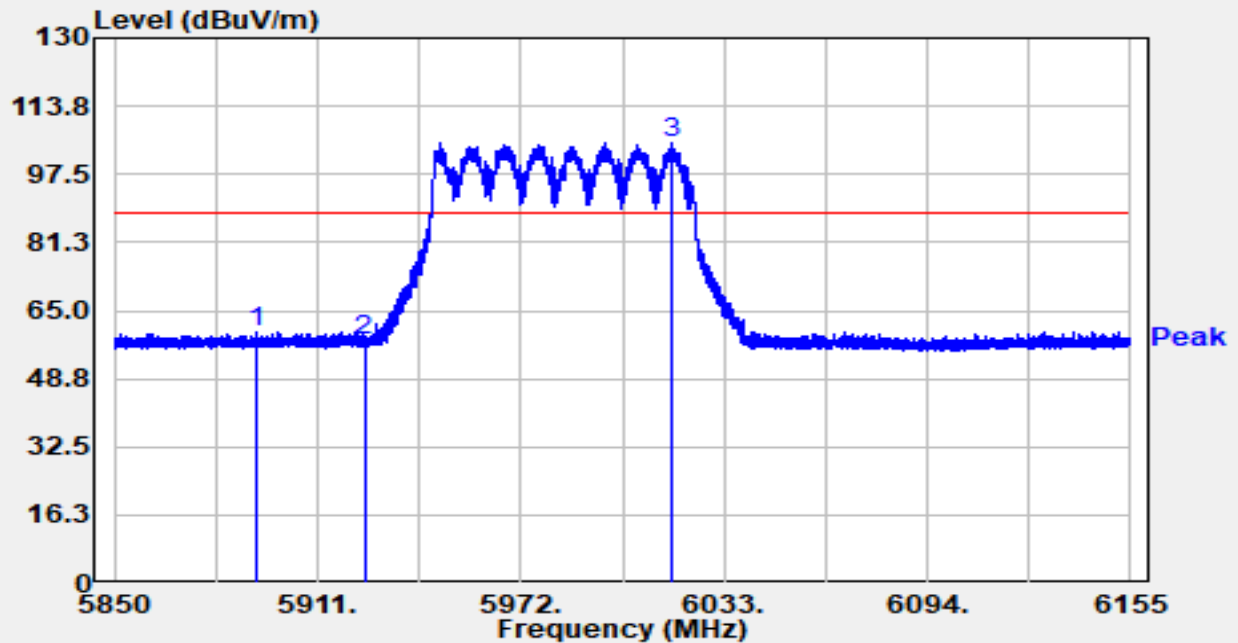


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5892.730	42.46	17.38	59.84	-28.36	88.20	Peak
2		5925.000	40.70	17.36	58.06	-30.14	88.20	Peak
3		6017.476	87.29	17.64	104.93	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-08-01
Test Engineer	Carl Jiang	Temp./Humidity	26.7°C/64.3%
Factor	07105 1-18G	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz switch off		

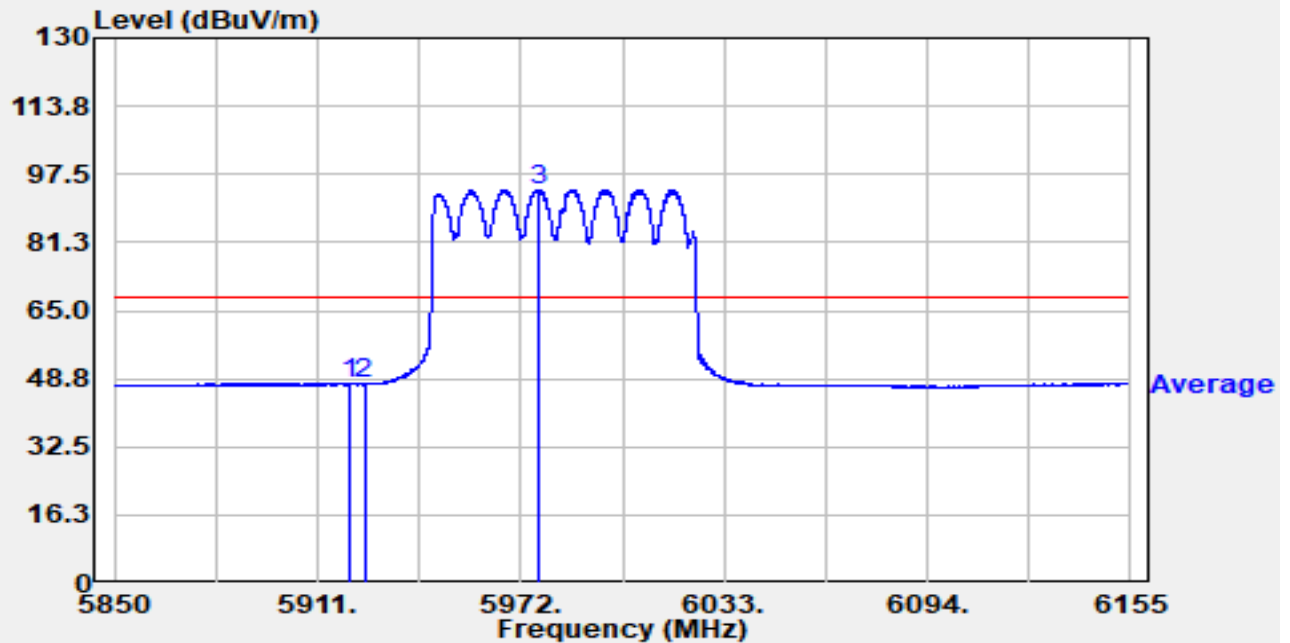


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.394	30.31	17.35	47.66	-20.54	68.20	Average
2		5925.000	30.10	17.36	47.46	-20.74	68.20	Average
3		5977.154	76.24	17.57	93.81	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-08-01
Test Engineer	Carl Jiang	Temp./Humidity	26.7°C/64.3%
Factor	07105 1-18G	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz switch off		

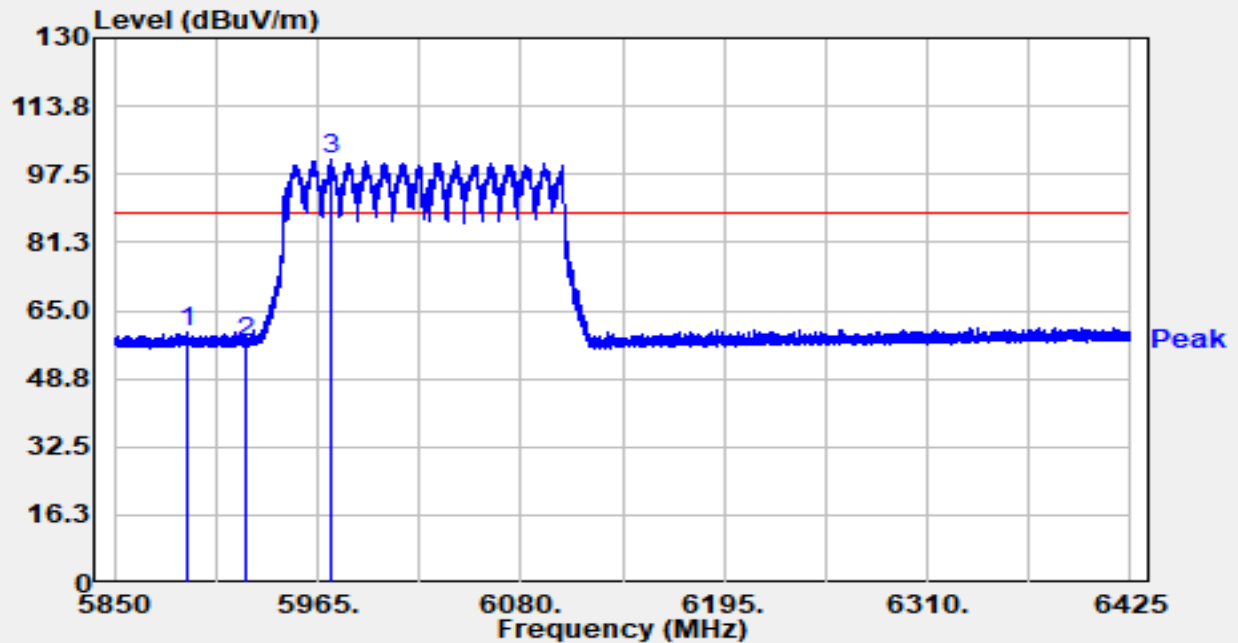


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5891.285	42.43	17.39	59.82	-28.38	88.20	Peak
2		5924.980	39.87	17.36	57.23	-30.97	88.20	Peak
3		5972.360	83.47	17.54	101.00	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-08-01
Test Engineer	Carl Jiang	Temp./Humidity	26.7°C/64.3%
Factor	07105 1-18G	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz switch off		

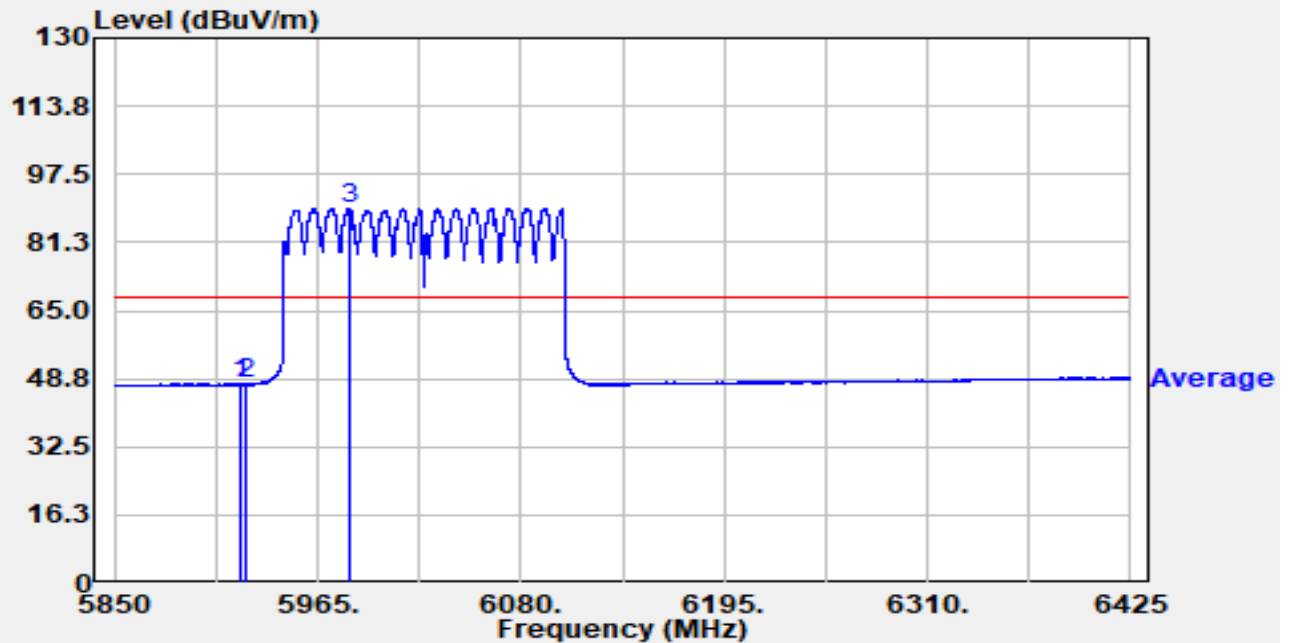


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.955	30.21	17.36	47.57	-20.63	68.20	Average
2		5924.980	30.04	17.36	47.40	-20.80	68.20	Average
3		5982.652	71.82	17.57	89.39	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-08-01
Test Engineer	Carl Jiang	Temp./Humidity	26.7°C/64.3%
Factor	07105 1-18G	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz switch off		

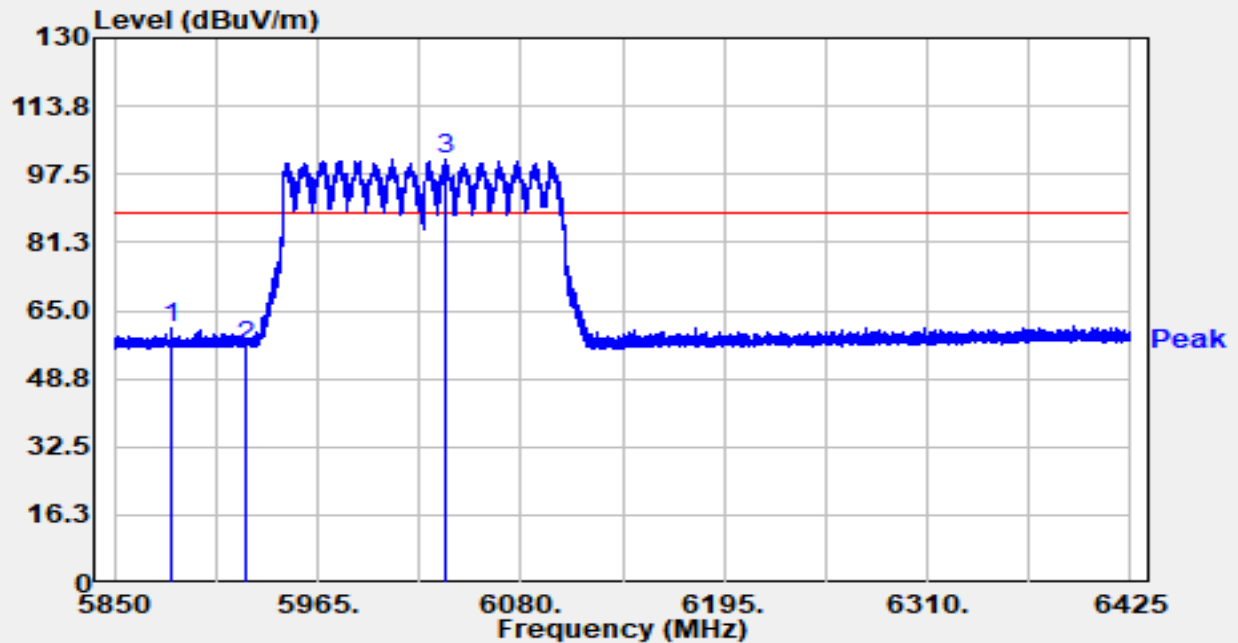


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5882.603	43.28	17.40	60.68	-27.52	88.20	Peak
2		5924.980	39.07	17.36	56.43	-31.77	88.20	Peak
3		6037.163	83.45	17.85	101.30	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-08-01
Test Engineer	Carl Jiang	Temp./Humidity	26.7°C/64.3%
Factor	07105 1-18G	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz switch off		

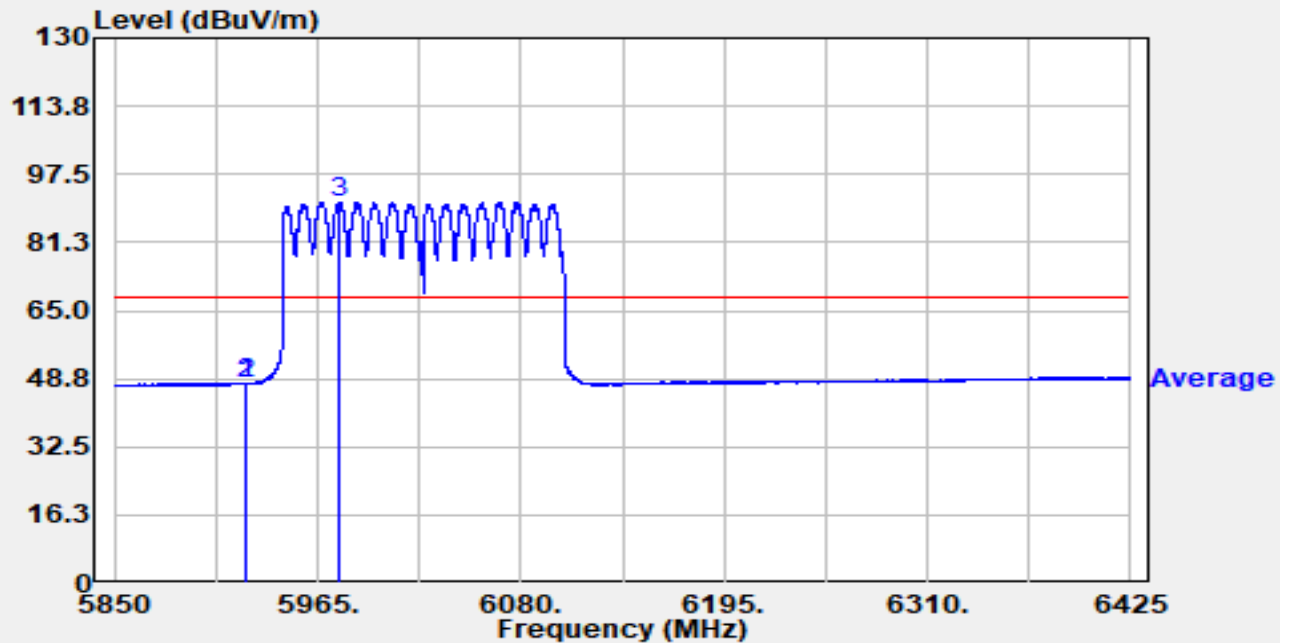


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.830	30.28	17.36	47.64	-20.56	68.20	Average
2		5924.980	30.13	17.36	47.49	-20.71	68.20	Average
3		5977.535	73.31	17.58	90.89	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-07-25
Test Engineer	Carl Jiang	Temp./Humidity	25.4°C/60.1%
Factor	07105 1-18G	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz switch on		

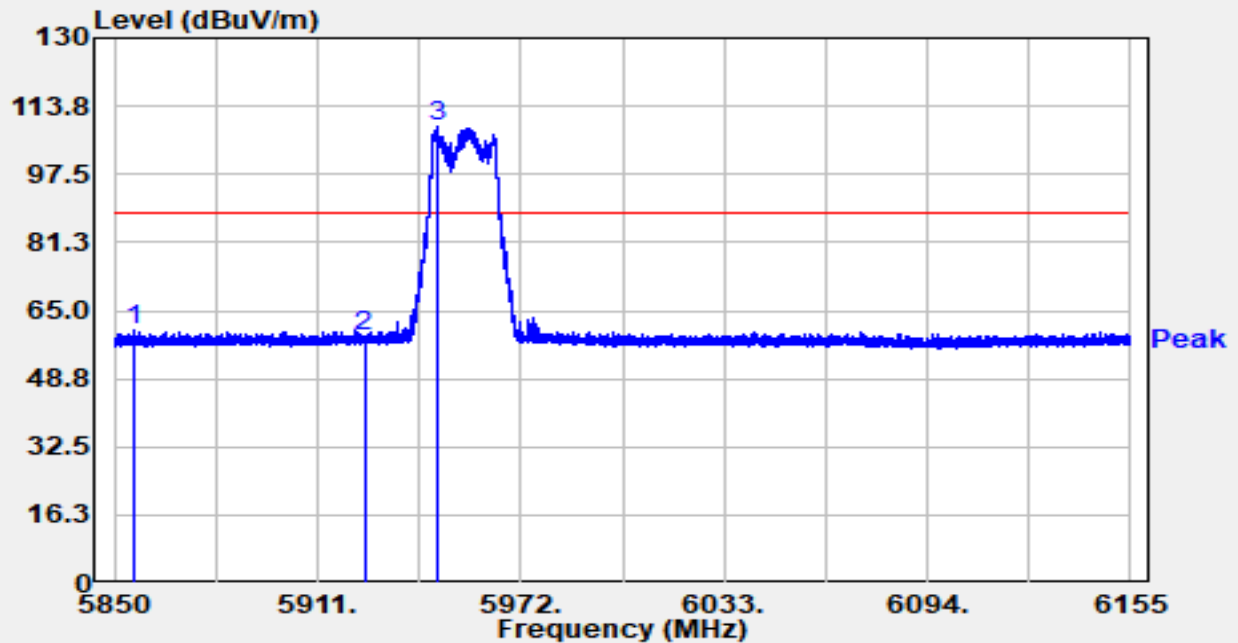


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5856.130	42.85	17.33	60.18	-28.02	88.20	Peak
2		5925.000	41.38	17.36	58.74	-29.46	88.20	Peak
3		5947.143	91.68	17.44	109.13	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-07-25
Test Engineer	Carl Jiang	Temp./Humidity	25.4°C/60.1%
Factor	07105 1-18G	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz switch on		

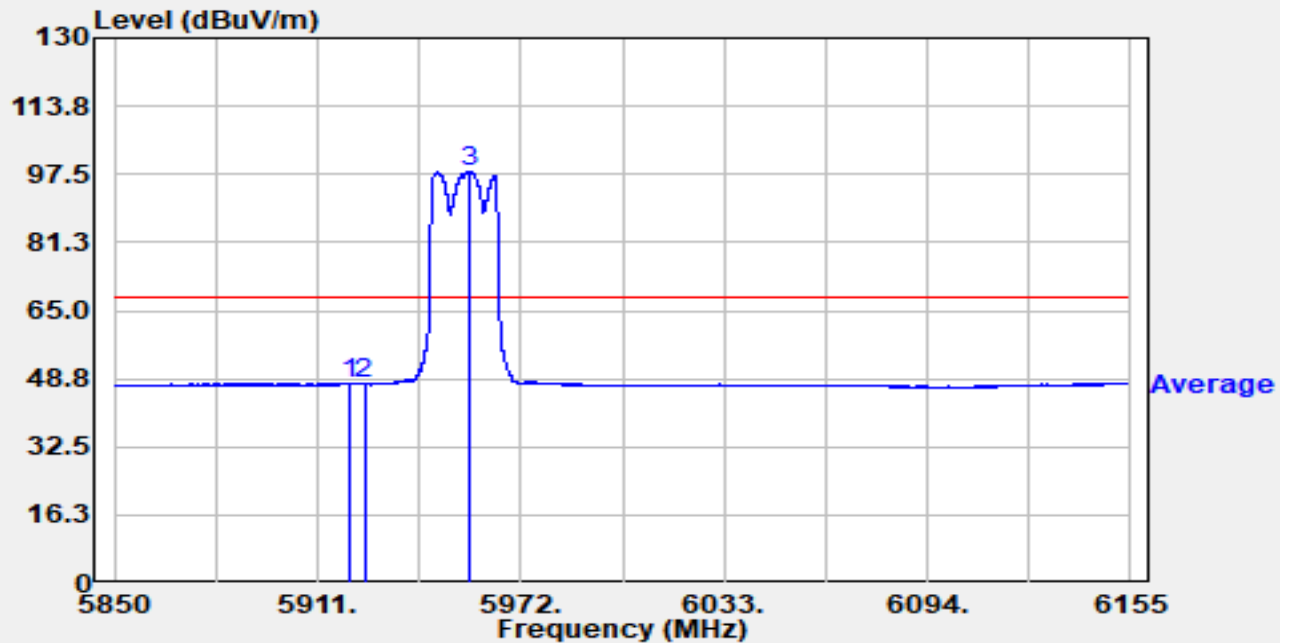


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.943	30.24	17.36	47.59	-20.61	68.20	Average
2		5925.000	30.09	17.36	47.45	-20.75	68.20	Average
3		5956.659	80.86	17.46	98.32	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-07-25
Test Engineer	Carl Jiang	Temp./Humidity	25.4°C/60.1%
Factor	07105 1-18G	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz switch on		

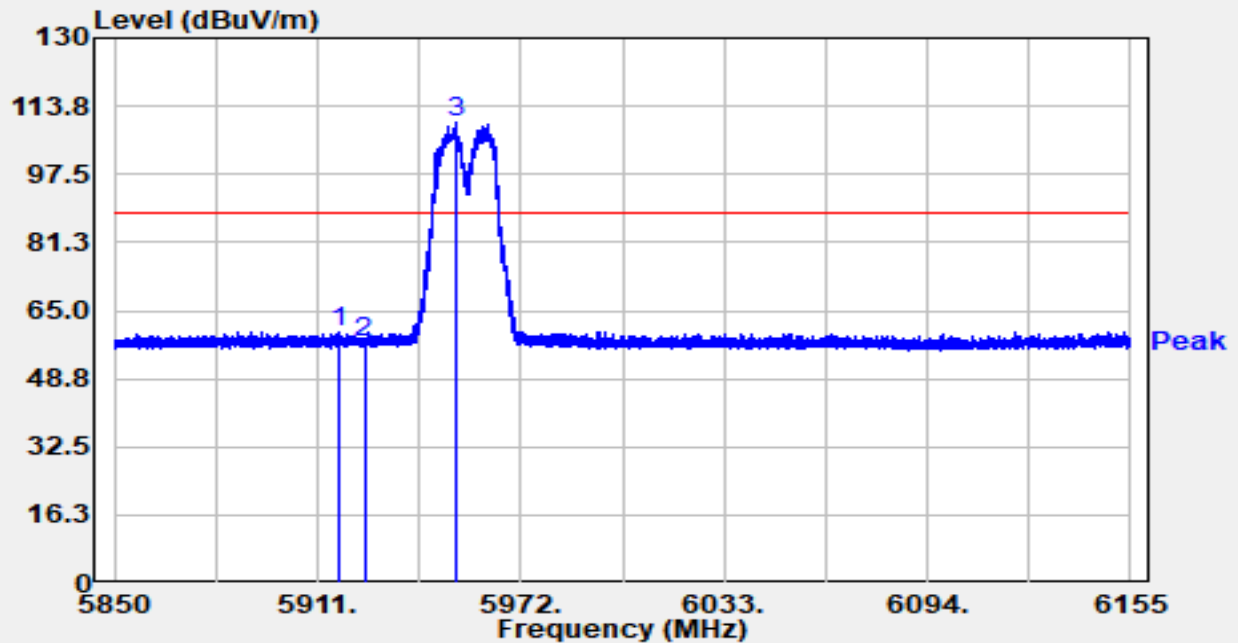


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5917.100	42.68	17.35	60.03	-28.17	88.20	Peak
2		5925.000	40.16	17.36	57.53	-30.67	88.20	Peak
3		5952.297	92.19	17.45	109.64	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-07-25
Test Engineer	Carl Jiang	Temp./Humidity	25.4°C/60.1%
Factor	07105 1-18G	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz switch on		

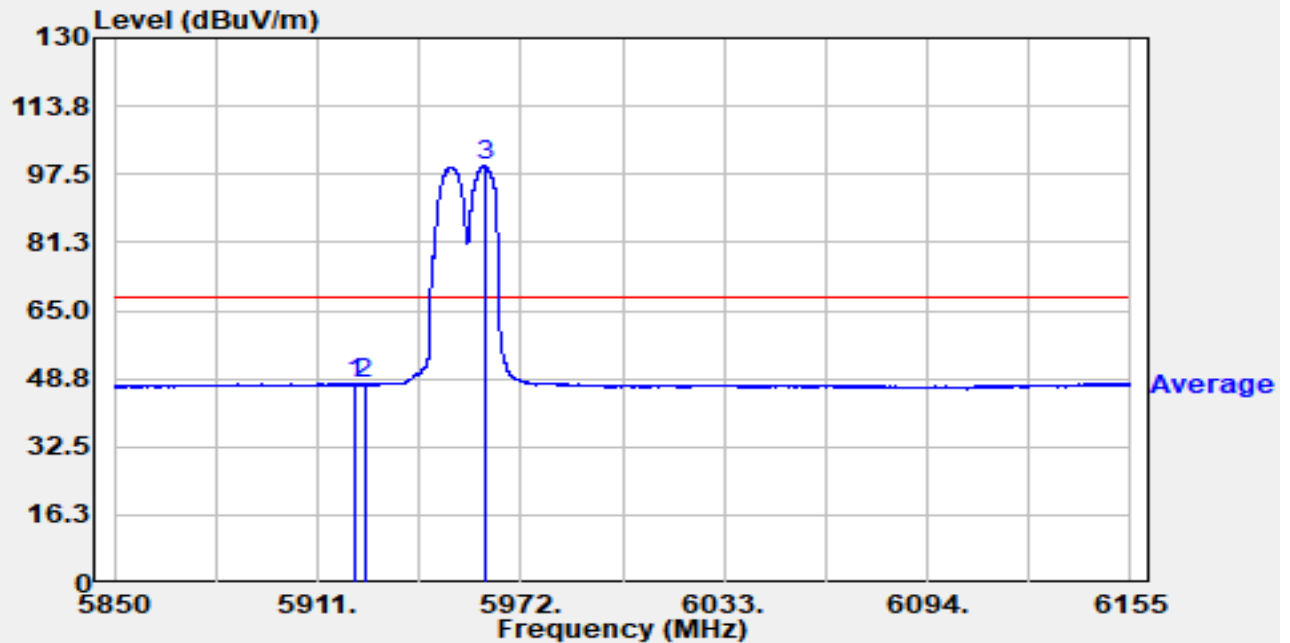


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.560	30.24	17.36	47.60	-20.60	68.20	Average
2		5925.000	30.05	17.36	47.41	-20.79	68.20	Average
3		5961.203	81.97	17.47	99.44	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-07-25
Test Engineer	Carl Jiang	Temp./Humidity	25.4°C/60.1%
Factor	07105 1-18G	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz switch on		

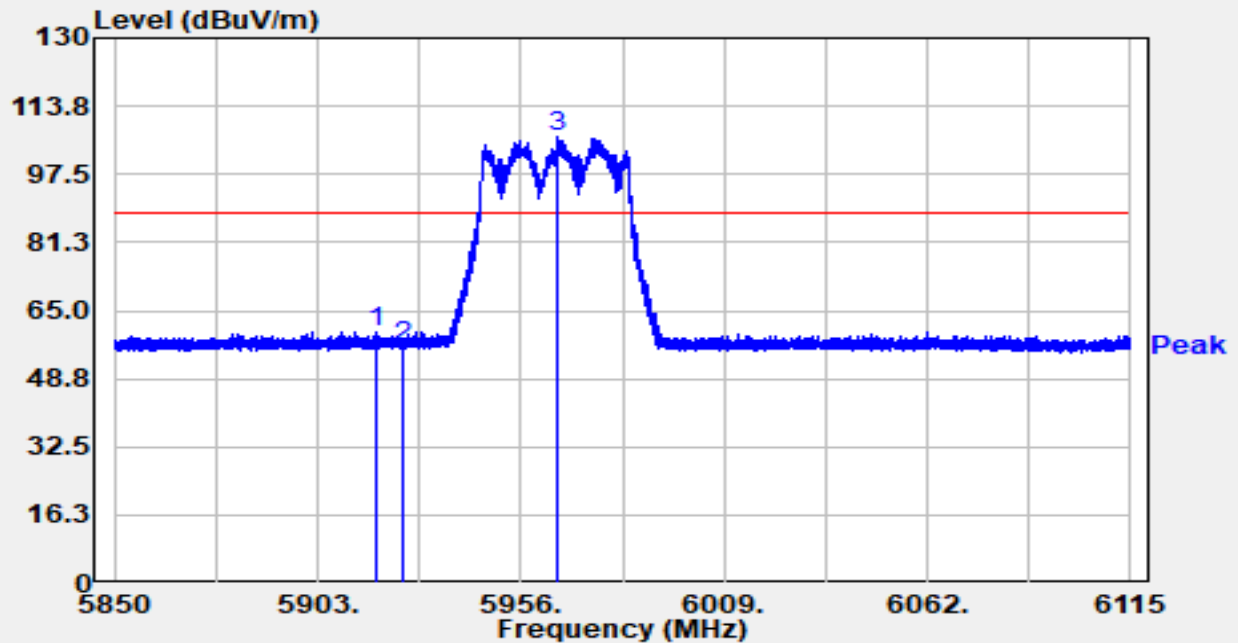


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5918.317	42.73	17.35	60.08	-28.12	88.20	Peak
2		5924.995	39.24	17.36	56.60	-31.60	88.20	Peak
3		5965.699	88.78	17.49	106.26	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-07-25
Test Engineer	Carl Jiang	Temp./Humidity	25.4°C/60.1%
Factor	07105 1-18G	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz switch on		

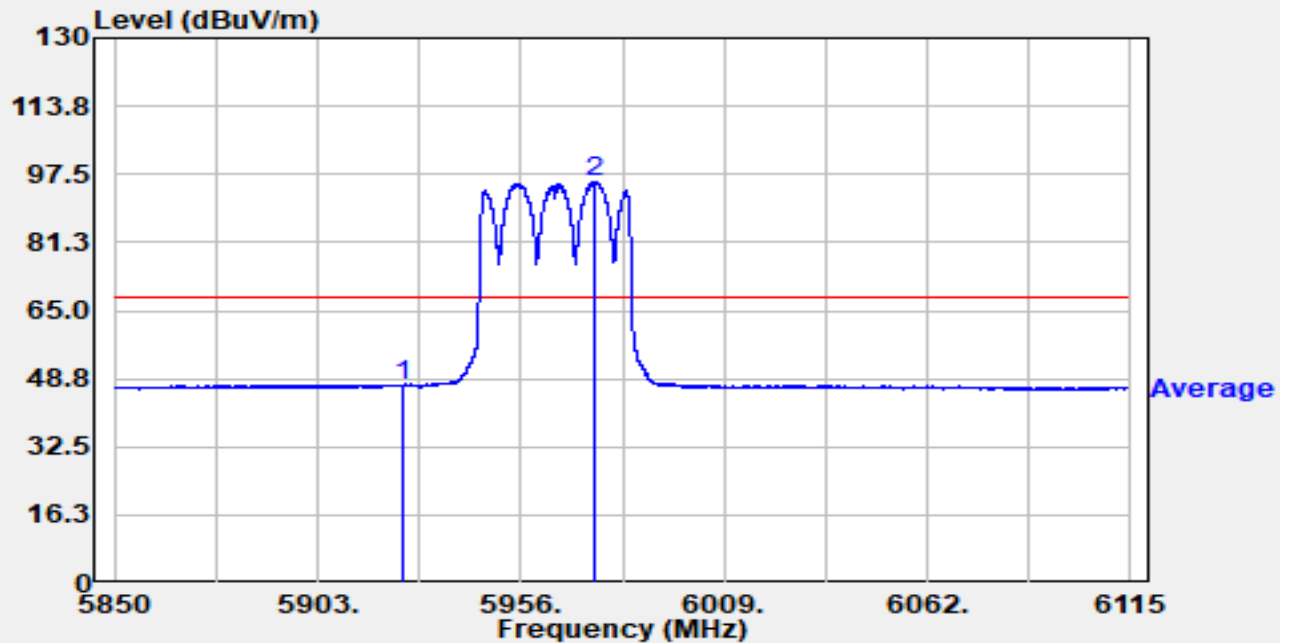


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.995	29.71	17.36	47.07	-21.13	68.20	Average
2		5975.212	78.10	17.56	95.66	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-07-25
Test Engineer	Carl Jiang	Temp./Humidity	25.4°C/60.1%
Factor	07105 1-18G	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz switch on		

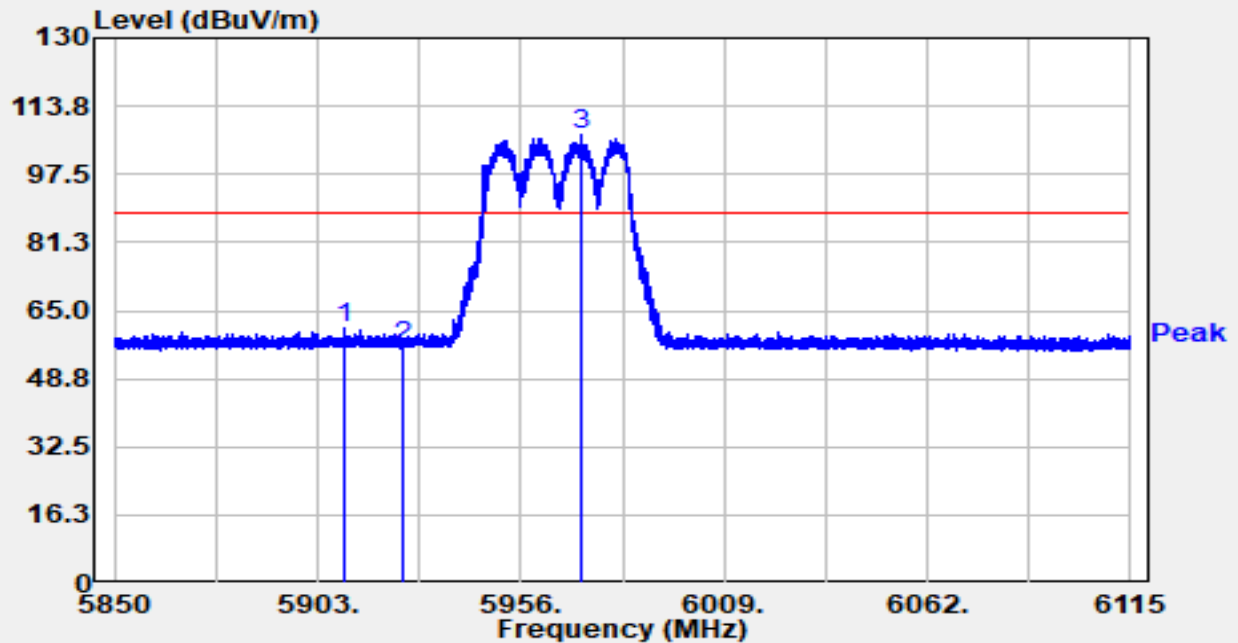


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5910.102	43.48	17.35	60.83	-27.37	88.20	Peak
2		5924.995	39.14	17.36	56.50	-31.70	88.20	Peak
3		5971.635	89.23	17.53	106.76	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-07-25
Test Engineer	Carl Jiang	Temp./Humidity	25.4°C/60.1%
Factor	07105 1-18G	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz switch on		

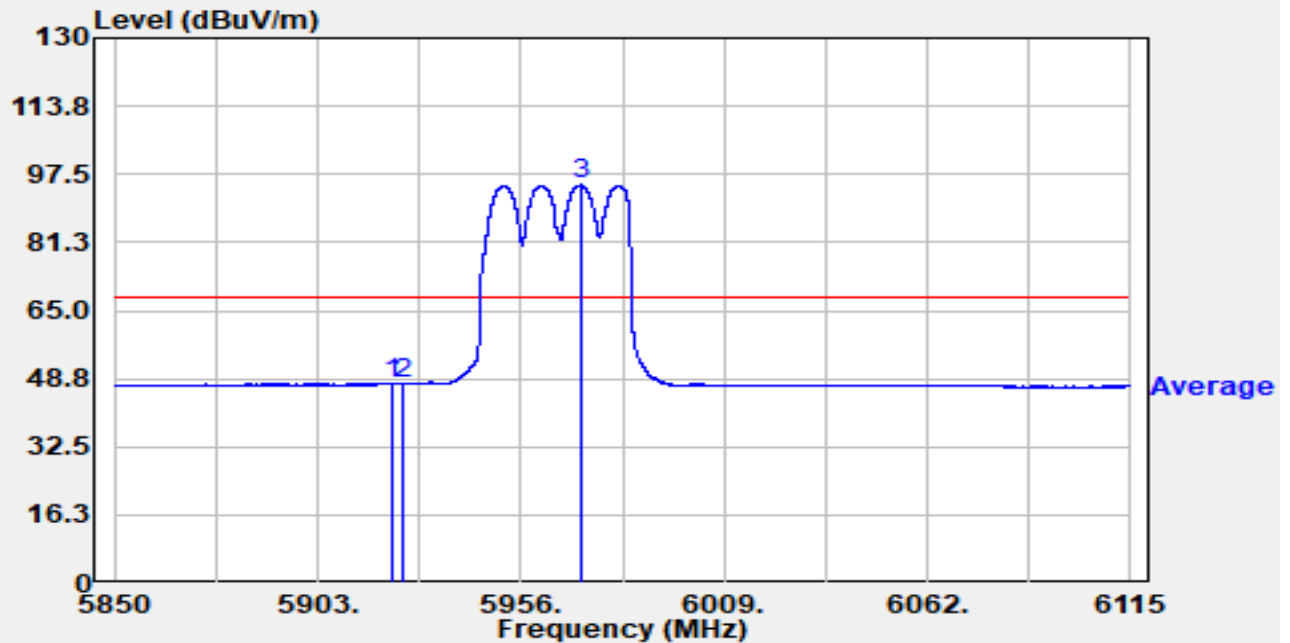


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.239	30.25	17.36	47.61	-20.59	68.20	Average
2		5924.995	30.04	17.36	47.41	-20.79	68.20	Average
3		5971.662	77.44	17.53	94.98	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-07-25
Test Engineer	Carl Jiang	Temp./Humidity	25.4°C/60.1%
Factor	07105 1-18G	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz switch on		

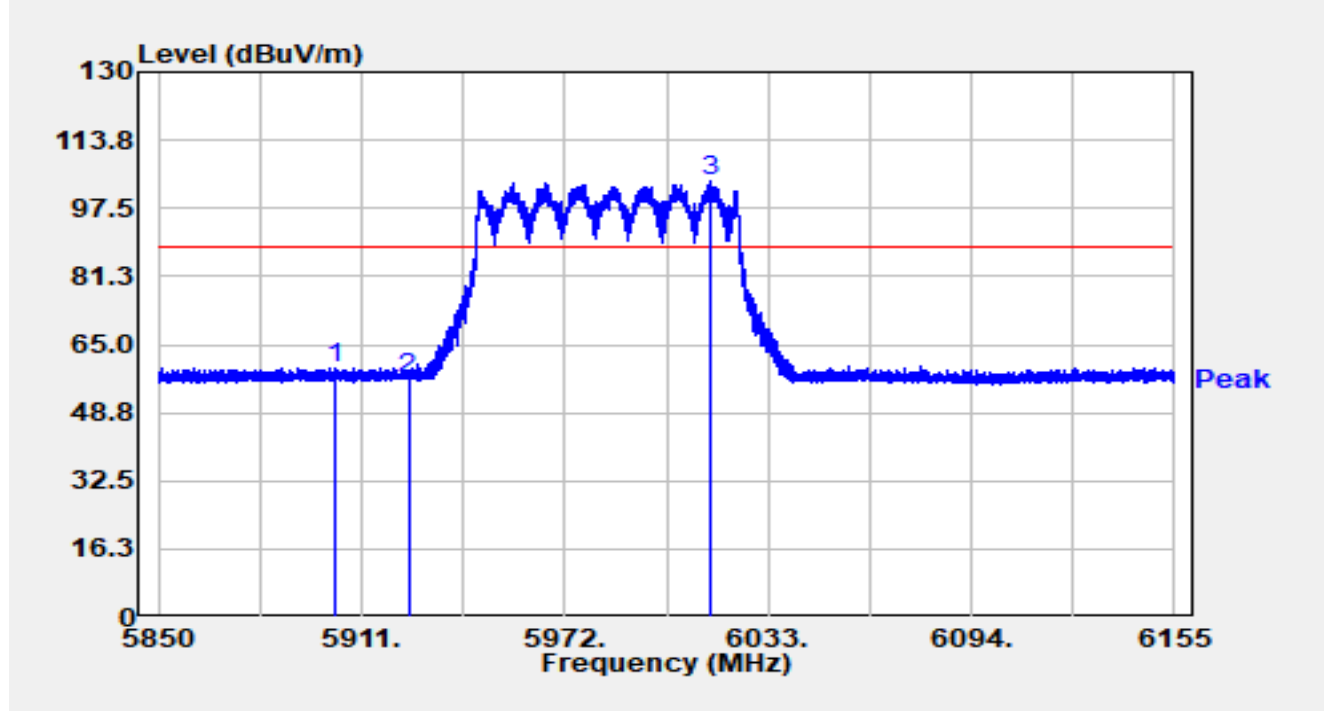


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5902.979	42.20	17.36	59.56	-28.64	88.20	Peak
2		5925.000	39.68	17.36	57.04	-31.16	88.20	Peak
3		6015.951	86.35	17.62	103.97	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-07-25
Test Engineer	Carl Jiang	Temp./Humidity	25.4°C/60.1%
Factor	07105 1-18G	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz switch on		

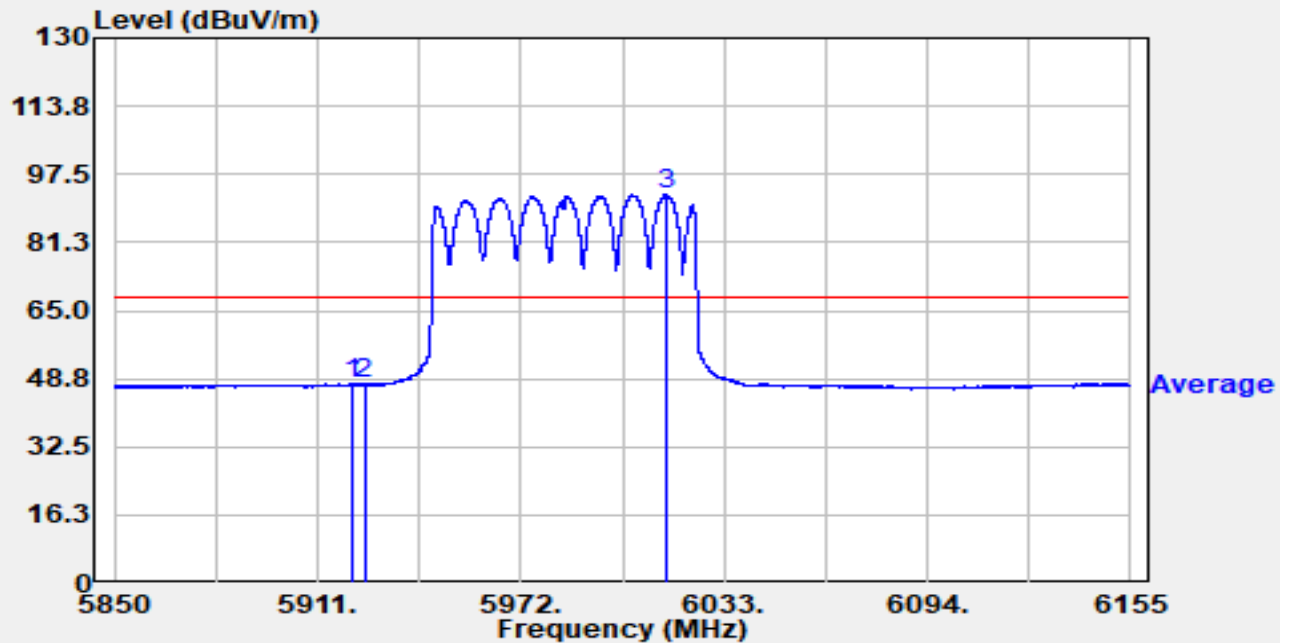


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.157	30.17	17.36	47.53	-20.67	68.20	Average
2		5925.000	30.04	17.36	47.41	-20.79	68.20	Average
3		6015.646	74.97	17.62	92.59	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-07-25
Test Engineer	Carl Jiang	Temp./Humidity	25.4°C/60.1%
Factor	07105 1-18G	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz switch on		

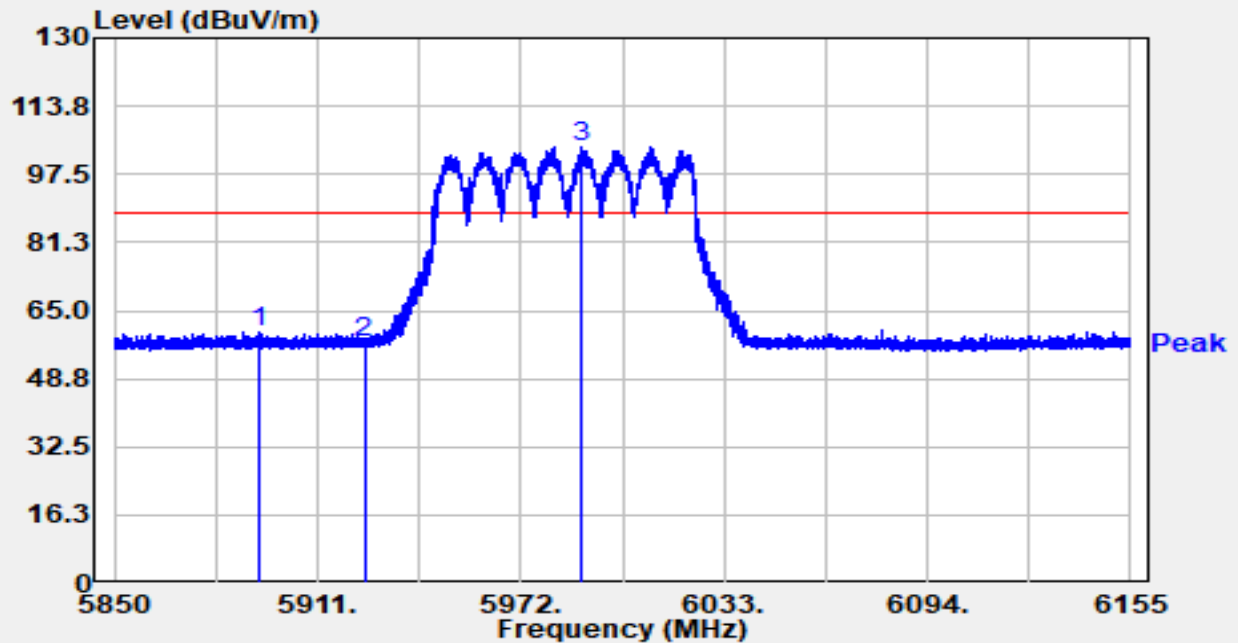


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5893.707	42.57	17.38	59.95	-28.25	88.20	Peak
2		5925.000	40.18	17.36	57.54	-30.66	88.20	Peak
3		5989.812	86.65	17.46	104.10	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-07-25
Test Engineer	Carl Jiang	Temp./Humidity	25.4°C/60.1%
Factor	07105 1-18G	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz switch on		

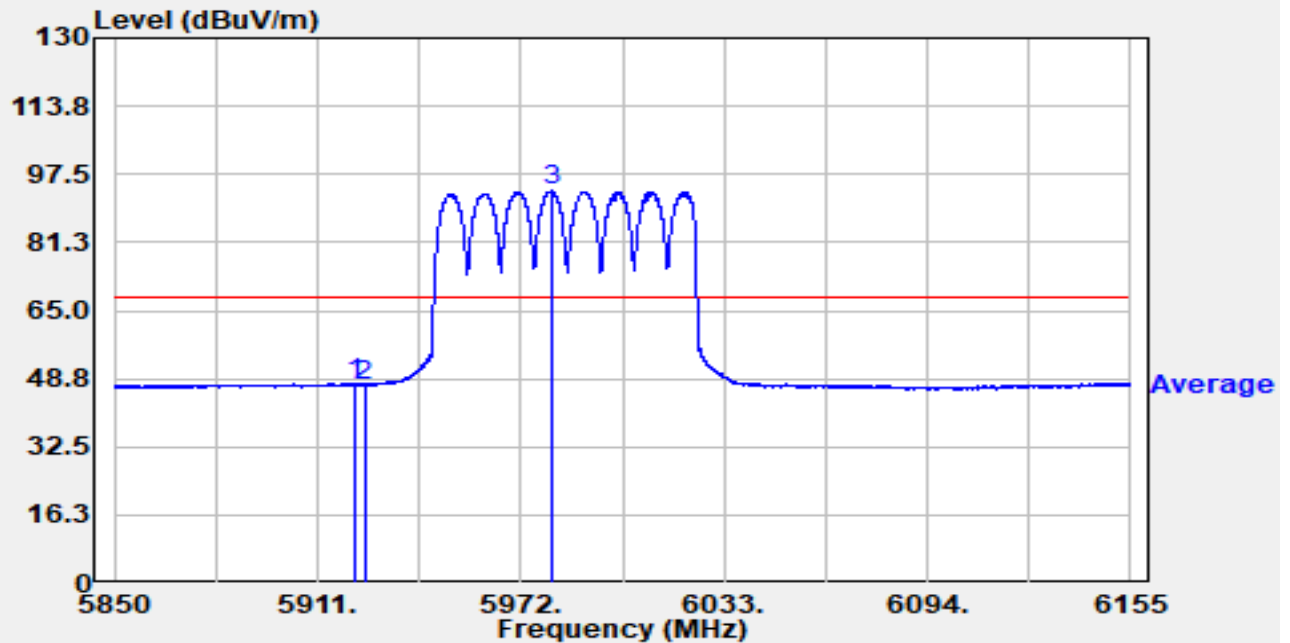


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.163	30.14	17.36	47.50	-20.70	68.20	Average
2		5925.000	29.74	17.36	47.10	-21.10	68.20	Average
3		5981.150	75.92	17.59	93.51	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-07-25
Test Engineer	Carl Jiang	Temp./Humidity	25.4°C/60.1%
Factor	07105 1-18G	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz switch on		

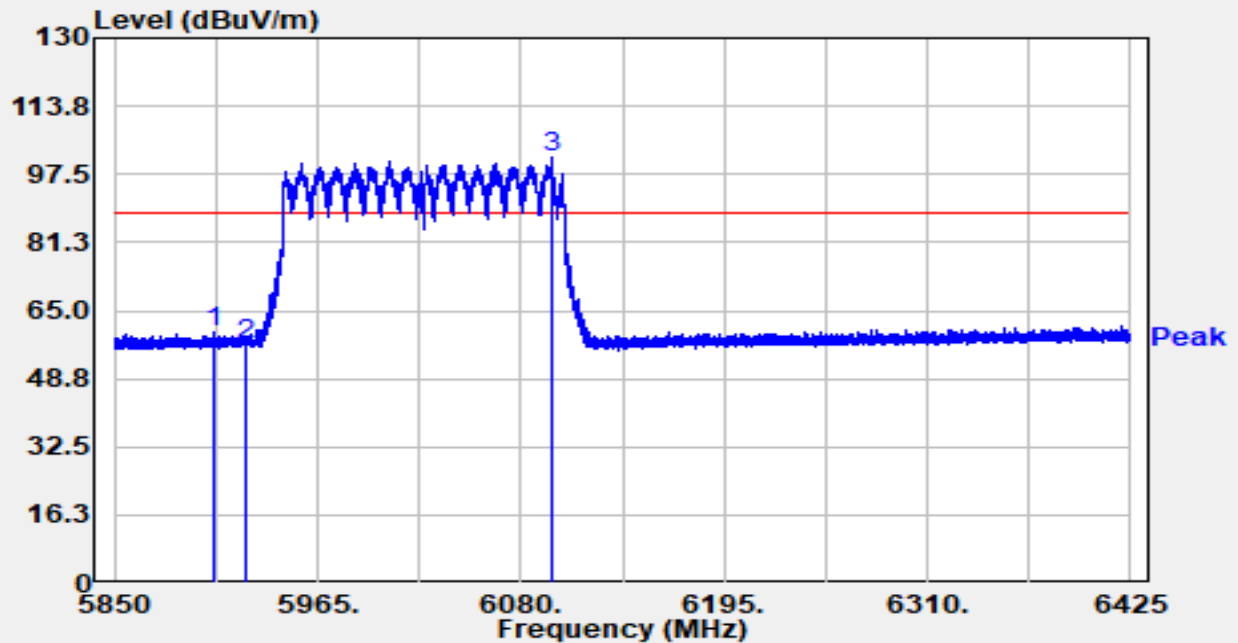


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5906.810	42.55	17.36	59.90	-28.30	88.20	Peak
2		5924.980	39.74	17.36	57.10	-31.10	88.20	Peak
3		6096.905	83.52	17.98	101.51	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-07-25
Test Engineer	Carl Jiang	Temp./Humidity	25.4°C/60.1%
Factor	07105 1-18G	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz switch on		

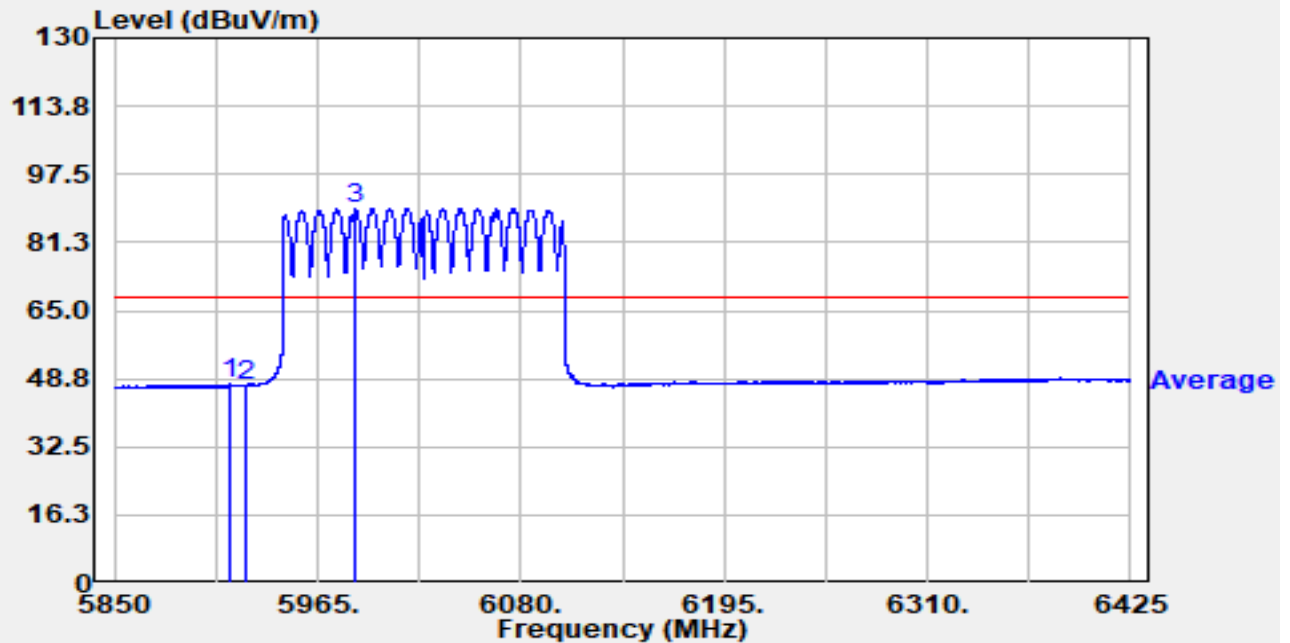


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5915.723	30.05	17.35	47.40	-20.80	68.20	Average
2		5924.980	29.72	17.36	47.08	-21.12	68.20	Average
3		5985.873	71.78	17.52	89.30	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-07-25
Test Engineer	Carl Jiang	Temp./Humidity	25.4°C/60.1%
Factor	07105 1-18G	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz switch on		

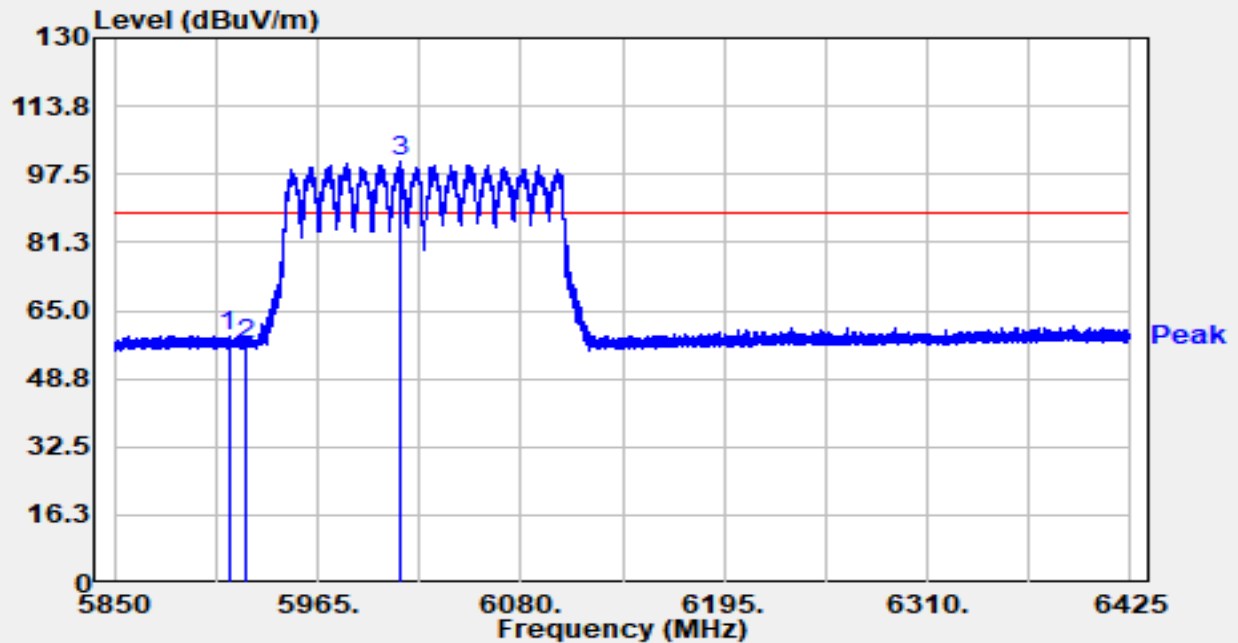


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5914.630	41.72	17.35	59.06	-29.14	88.20	Peak
2		5924.980	39.70	17.36	57.06	-31.14	88.20	Peak
3		6012.035	82.98	17.56	100.54	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2024-07-25
Test Engineer	Carl Jiang	Temp./Humidity	25.4°C/60.1%
Factor	07105 1-18G	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz switch on		

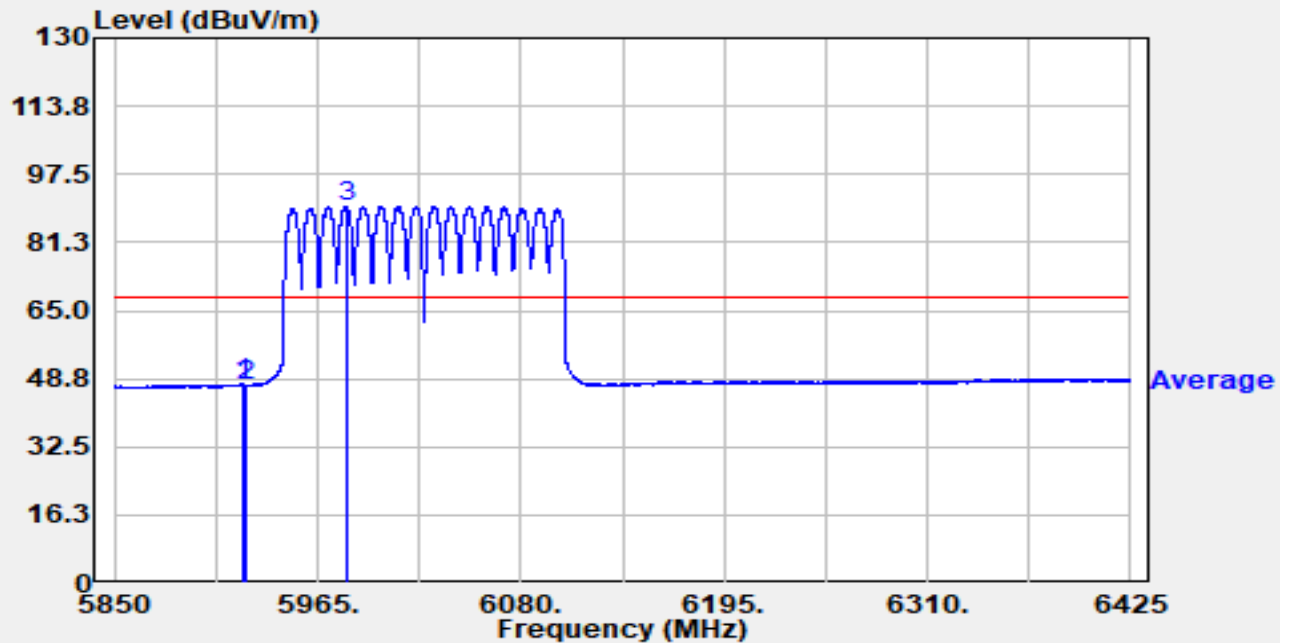


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.025	30.12	17.36	47.48	-20.72	68.20	Average
2		5924.980	29.63	17.36	46.99	-21.21	68.20	Average
3		5981.158	72.32	17.59	89.91	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

9. AC Conducted Emissions Test Result

Site: WZ-SR2	Test Date: 2023-12-21
Limit: FCC_Part15.207_CE_AC Power	Engineer: Linda Wei
Probe: ENV216_101683_Filter Off_C	Polarity: Line
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5825MHz	

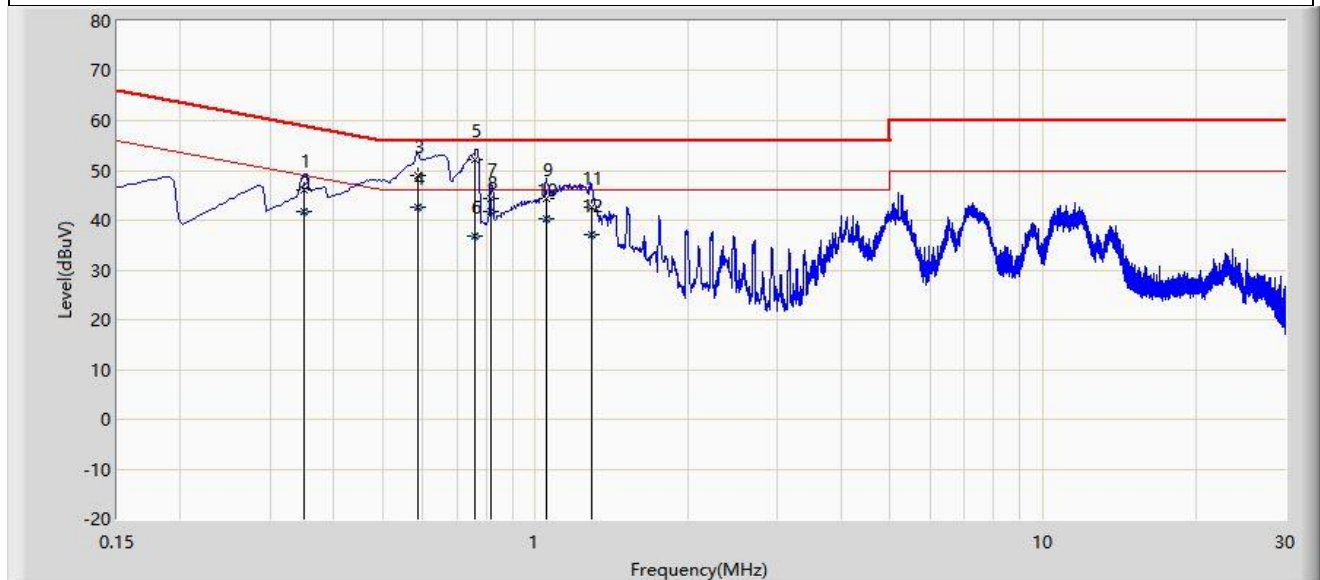


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.350	46.211	36.438	-12.751	58.962	9.773	QP
2		0.350	41.715	31.943	-7.247	48.962	9.773	AV
3		0.586	48.902	39.021	-7.098	56.000	9.880	QP
4	*	0.586	42.570	32.690	-3.430	46.000	9.880	AV
5		0.762	52.297	42.329	-3.703	56.000	9.967	QP
6		0.762	36.888	26.920	-9.112	46.000	9.967	AV
7		0.818	44.215	34.218	-11.785	56.000	9.997	QP
8		0.818	41.727	31.731	-4.273	46.000	9.997	AV
9		1.050	44.357	34.277	-11.643	56.000	10.081	QP
10		1.050	40.249	30.168	-5.751	46.000	10.081	AV
11		1.294	42.698	32.614	-13.302	56.000	10.084	QP
12		1.294	37.182	27.098	-8.818	46.000	10.084	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: WZ-SR2	Test Date: 2023-12-21
Limit: FCC_Part15.207_CE_AC Power	Engineer: Linda Wei
Probe: ENV216_101683_Filter Off_C	Polarity: Neutral
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5825MHz	

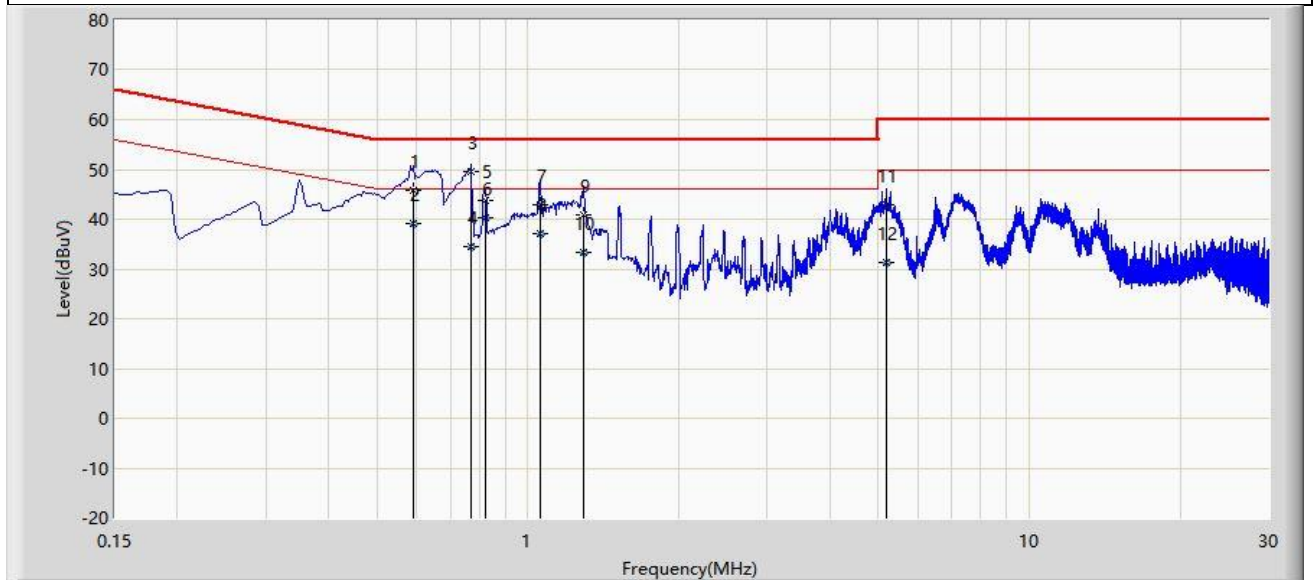

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.590	45.873	36.001	-10.127	56.000	9.872	QP
2		0.590	39.218	29.346	-6.782	46.000	9.872	AV
3		0.770	49.595	39.630	-6.405	56.000	9.965	QP
4		0.770	34.609	24.644	-11.391	46.000	9.965	AV
5		0.822	43.868	33.880	-12.132	56.000	9.989	QP
6	*	0.822	40.353	30.365	-5.647	46.000	9.989	AV
7		1.058	42.915	32.844	-13.085	56.000	10.071	QP
8		1.058	37.125	27.054	-8.875	46.000	10.071	AV
9		1.294	40.975	30.901	-15.025	56.000	10.074	QP
10		1.294	33.344	23.270	-12.656	46.000	10.074	AV
11		5.186	42.778	32.613	-17.222	60.000	10.165	QP
12		5.186	31.184	21.019	-18.816	50.000	10.165	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).