



## Channel 03 (2422MHz)

## Low Band Edge

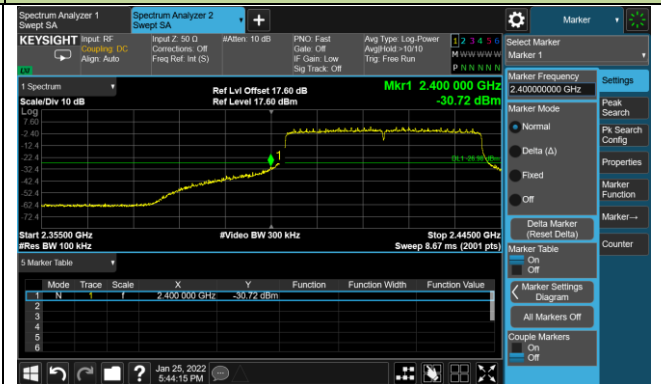


|  |  |
|--|--|
|  |  |
|--|--|

## Spurious Emission

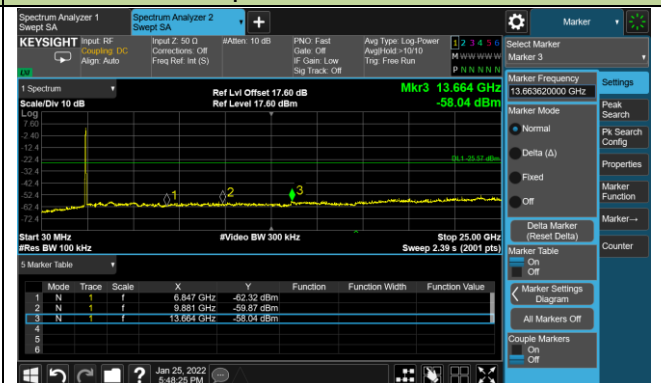


# Channel 09 (2452MHz)


## 100kHz PSD reference Level

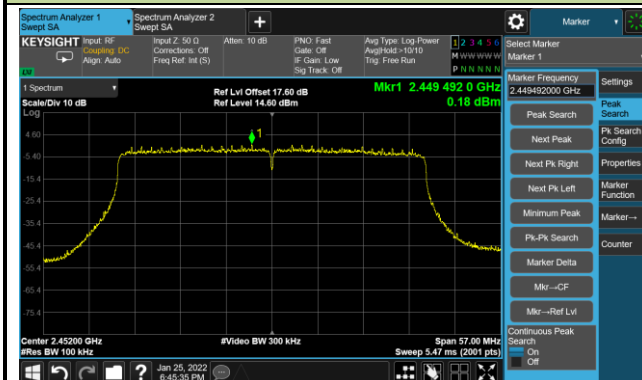

## High Band Edge

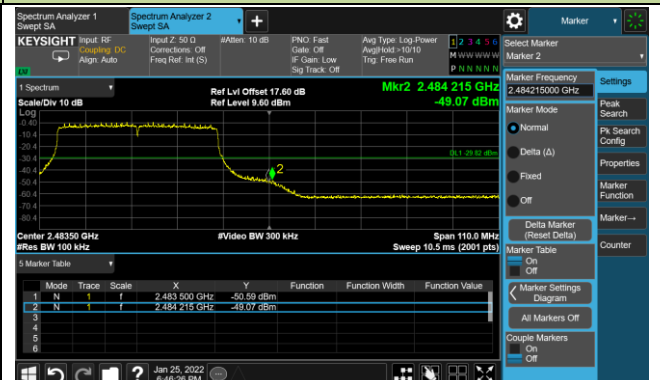

## Spurious Emission

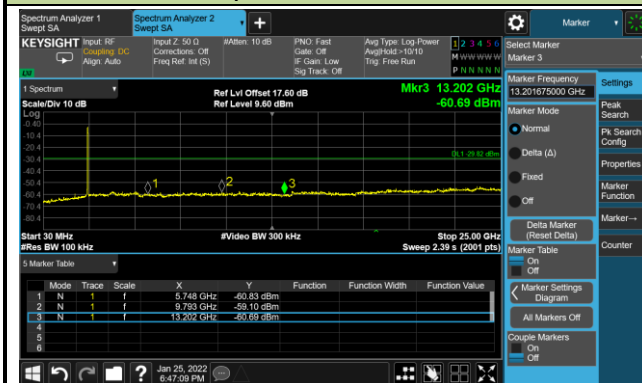


|                      |                        |               |            |
|----------------------|------------------------|---------------|------------|
| Product              | ACCESS POINT           | Test Engineer | Eric Lin   |
| Test Site            | SR2                    | Test Date     | 2022/01/25 |
| Filter Configuration | Filter 2# (Spot Check) |               |            |

| Test Mode     | Data Rate<br>/ MCS | Channel No. | Frequency<br>(MHz) | Limit<br>(dBc) | Result |
|---------------|--------------------|-------------|--------------------|----------------|--------|
| 802.11ax-HE20 | MCS0               | 01          | 2412               | 30             | Pass   |


# 802.11ax-HE20 Out-of-Band Emissions - Ant 0

## Channel 01 (2412MHz)


### 100kHz PSD reference Level

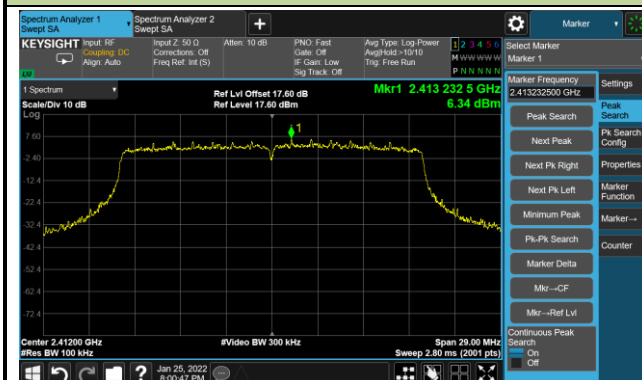

### Low Band Edge

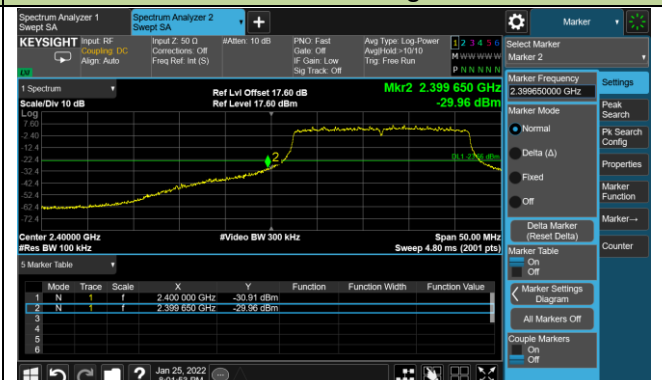


### Spurious Emission

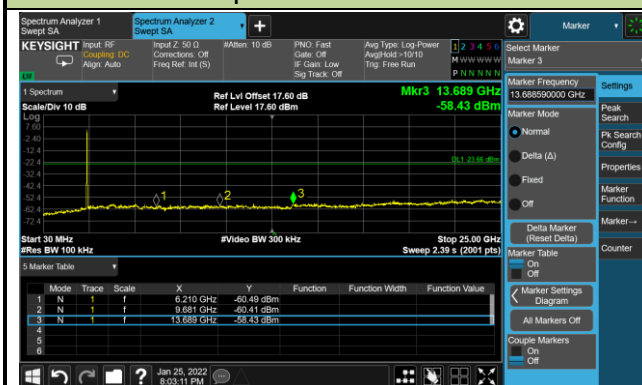


## 802.11ax-HE20 Out-of-Band Emissions - Ant 1

### Channel 01 (2412MHz)


#### 100kHz PSD reference Level

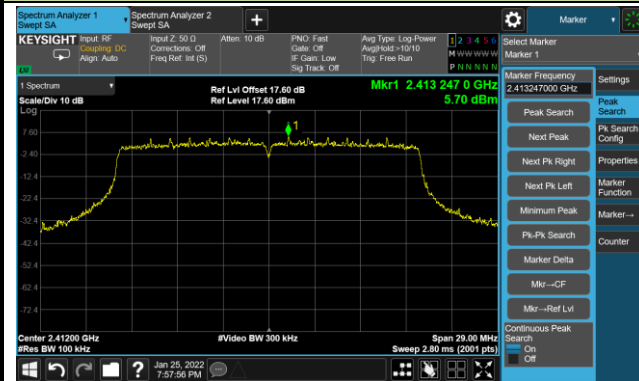

#### Low Band Edge

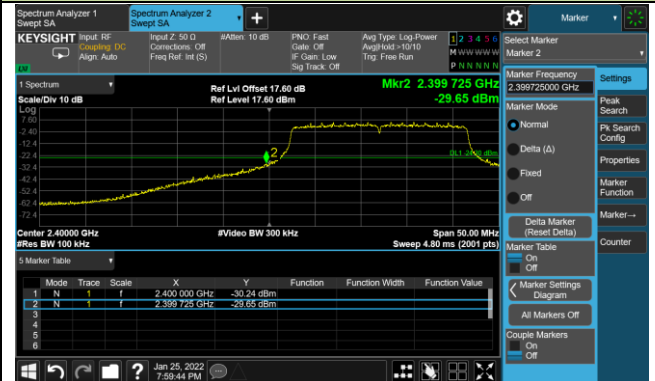


#### Spurious Emission

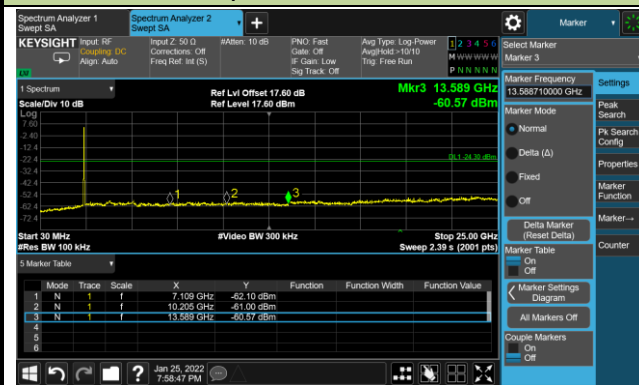


# 802.11ax-HE20 Out-of-Band Emissions - Ant 2

## Channel 01 (2412MHz)


### 100kHz PSD reference Level

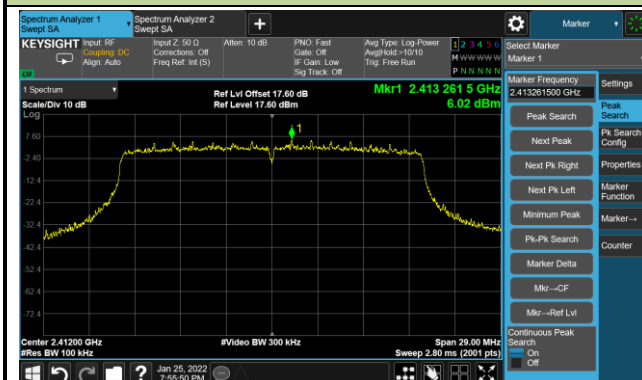

### Low Band Edge

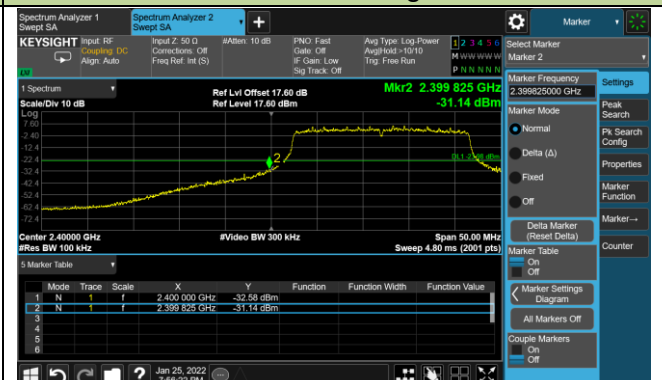


### Spurious Emission

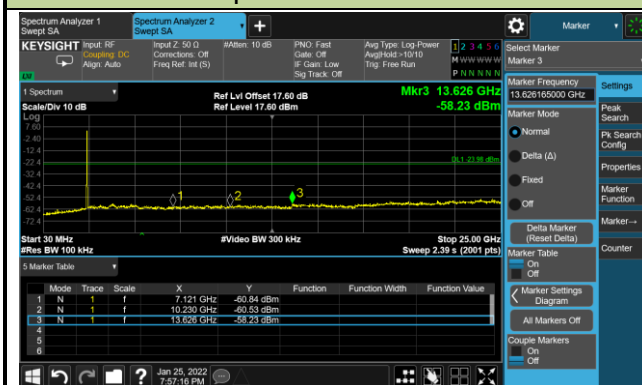


## 802.11ax-HE20 Out-of-Band Emissions - Ant 3

### Channel 01 (2412MHz)


#### 100kHz PSD reference Level

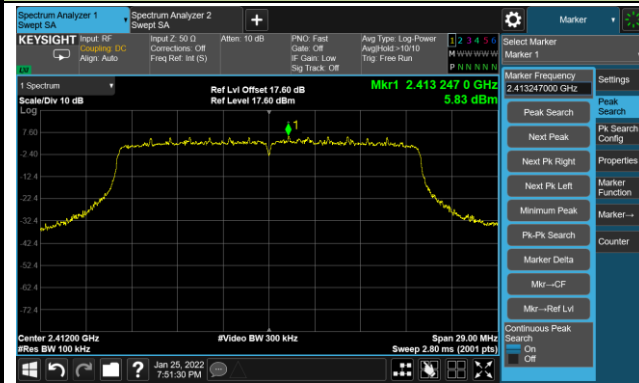

#### Low Band Edge

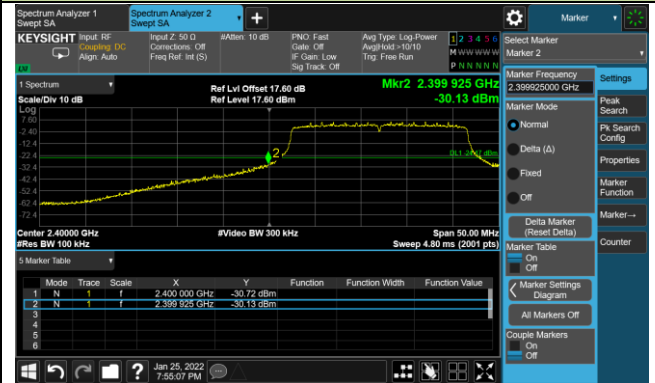

#### Spurious Emission

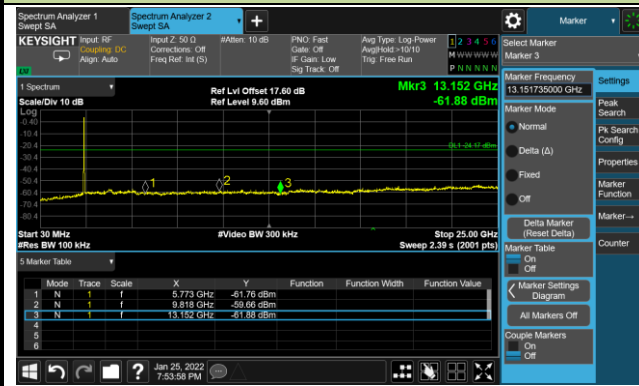


|                      |                        |               |            |
|----------------------|------------------------|---------------|------------|
| Product              | ACCESS POINT           | Test Engineer | Eric Lin   |
| Test Site            | SR2                    | Test Date     | 2022/01/25 |
| Filter Configuration | Filter 3# (Spot check) |               |            |

| Test Mode     | Data Rate<br>/ MCS | Channel No. | Frequency<br>(MHz) | Limit<br>(dBc) | Result |
|---------------|--------------------|-------------|--------------------|----------------|--------|
| 802.11ax-HE20 | MCS0               | 11          | 2462               | 30             | Pass   |


# 802.11ax-HE20 Out-of-Band Emissions - Ant 0

## Channel 11 (2462MHz)


### 100kHz PSD reference Level

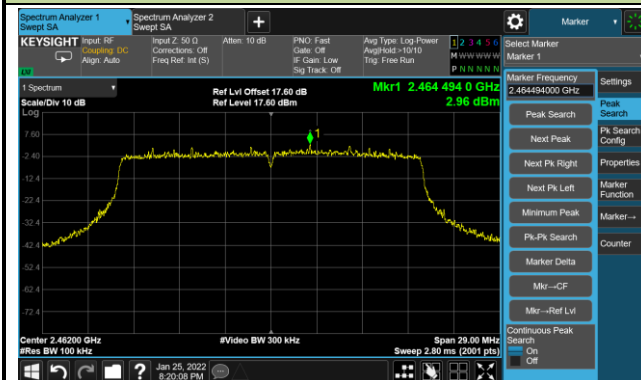

### High Band Edge

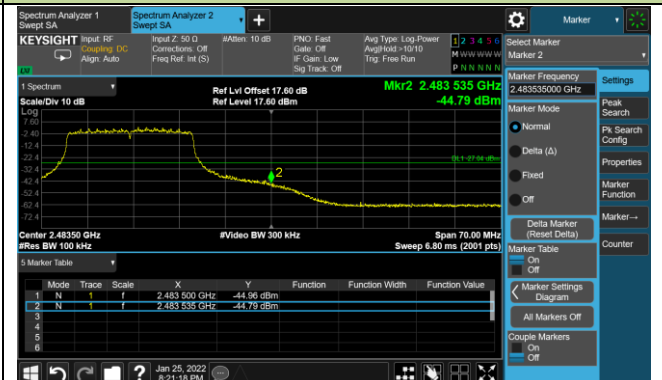


### Spurious Emission

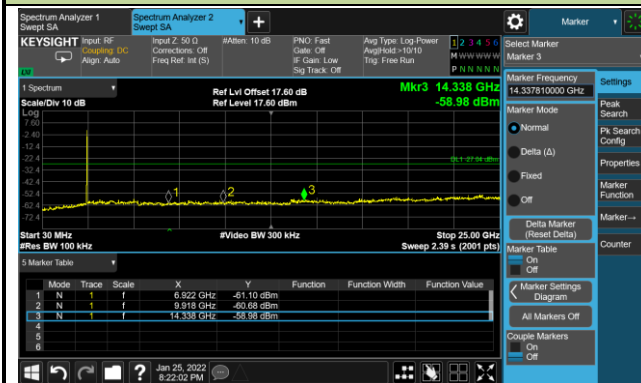


## 802.11ax-HE20 Out-of-Band Emissions - Ant 1

### Channel 11 (2462MHz)


#### 100kHz PSD reference Level

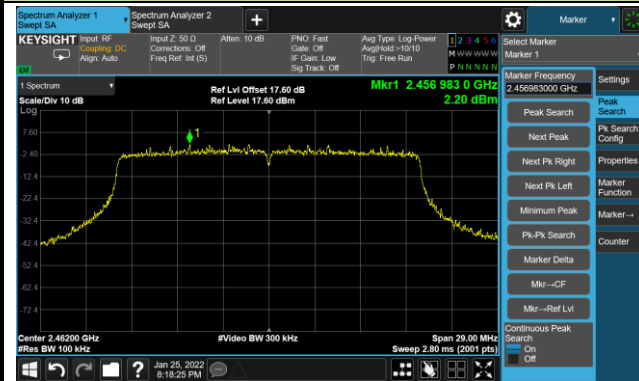

#### High Band Edge

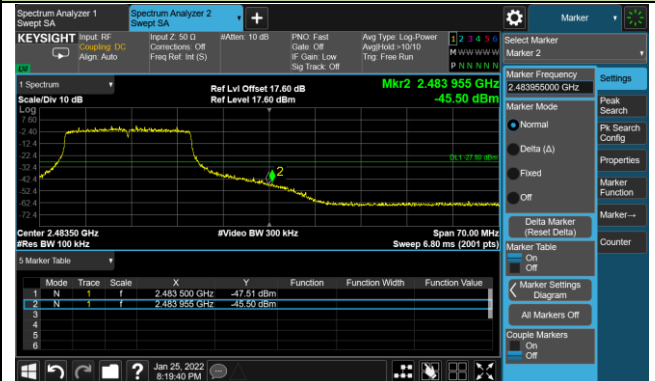


#### Spurious Emission

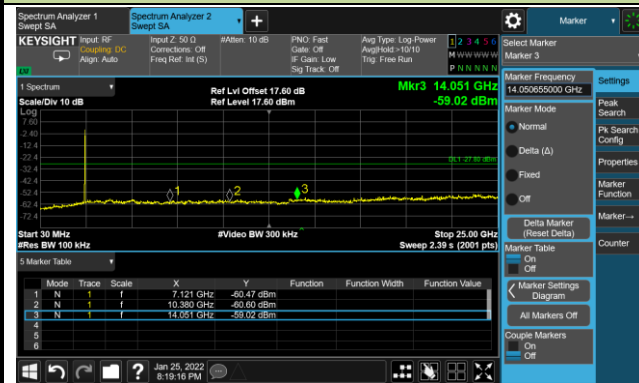


# 802.11ax-HE20 Out-of-Band Emissions - Ant 2

## Channel 11 (2462MHz)


### 100kHz PSD reference Level

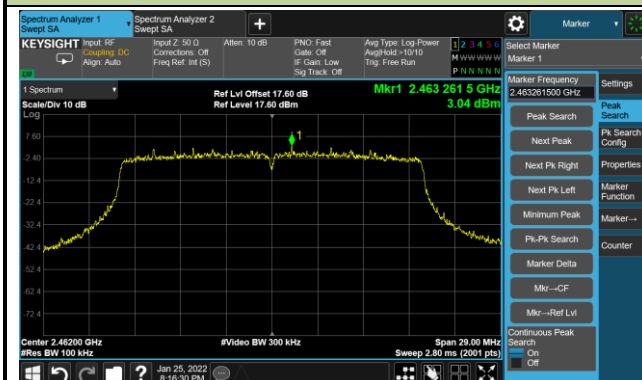

### High Band Edge

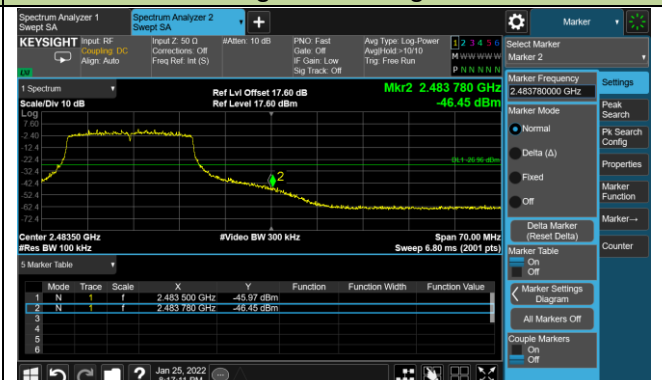


### Spurious Emission

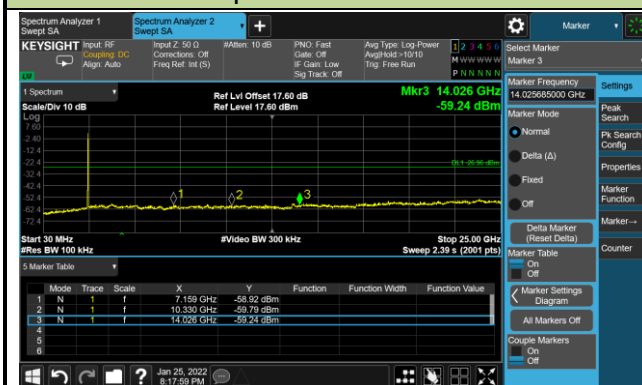


## 802.11ax-HE20 Out-of-Band Emissions - Ant 3

### Channel 11 (2462MHz)


#### 100kHz PSD reference Level

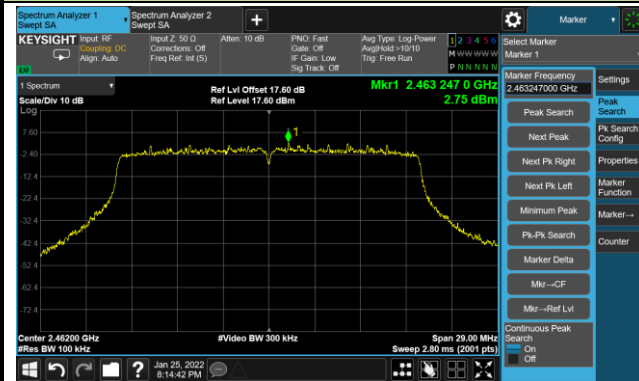

#### High Band Edge

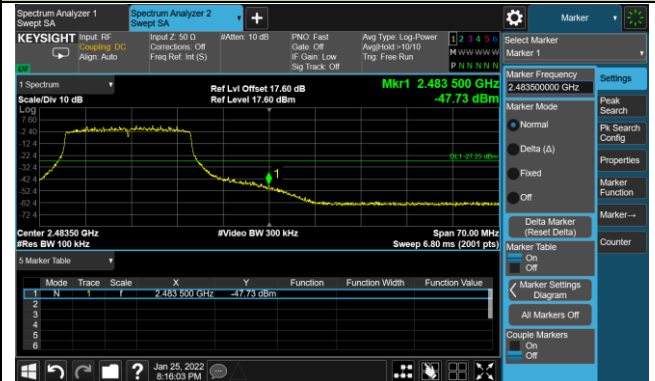

#### Spurious Emission

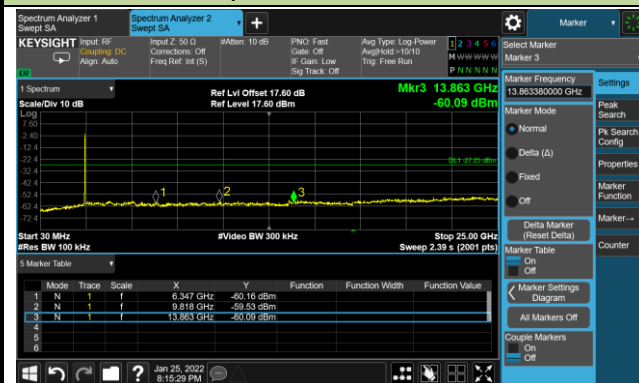

## 7.6. Radiated Spurious Emission Measurement

### 7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                          |                               |
|----------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[Uv/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)            | 30                            |
| 1.705 - 30                             | 30                       | 30                            |
| 30 - 88                                | 100                      | 3                             |
| 88 - 216                               | 150                      | 3                             |
| 216 - 960                              | 200                      | 3                             |
| Above 960                              | 500                      | 3                             |

### 7.6.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

### 7.6.3. Test Setting

**Table 1 - RBW as a function of frequency**

| Frequency     | RBW           |
|---------------|---------------|
| 9 ~ 150 kHz   | 200 ~ 300 Hz  |
| 0.15 ~ 30 MHz | 9 ~ 10 kHz    |
| 30 ~ 1000 MHz | 100 ~ 120 kHz |
| > 1000MHz     | 1MHz          |

### **Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

### **Peak Measurements above 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### **Average Measurements above 1GHz (Method VB)**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.


If the EUT duty cycle is  $< 98\%$ , set  $VBW \geq 1/T$ . T is the minimum transmission duration.

|         |        |              |        |               |        |
|---------|--------|--------------|--------|---------------|--------|
| 802.11b | 82 Hz  | 802.11n-HT20 | 180 Hz | 802.11ax-HE20 | 180 Hz |
| 802.11g | 510 Hz | 802.11n-HT40 | 180 Hz | 802.11ax-HE20 | 180 Hz |


4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

#### 7.6.4.Test Setup

##### Below 1GHz Test Setup:

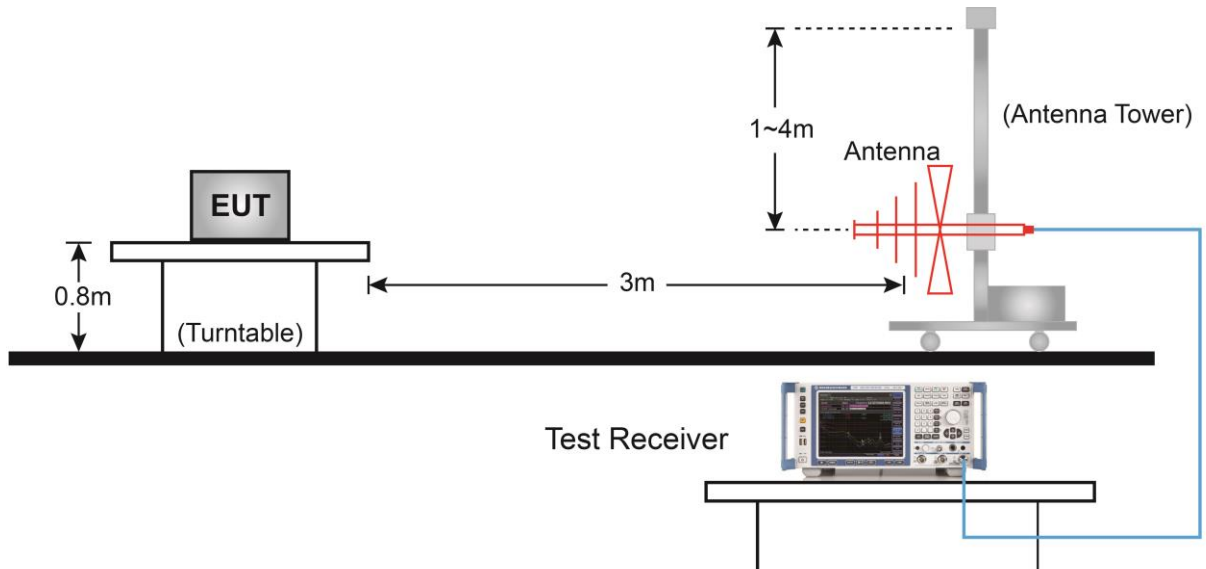


##### Above 1GHz Test Setup:

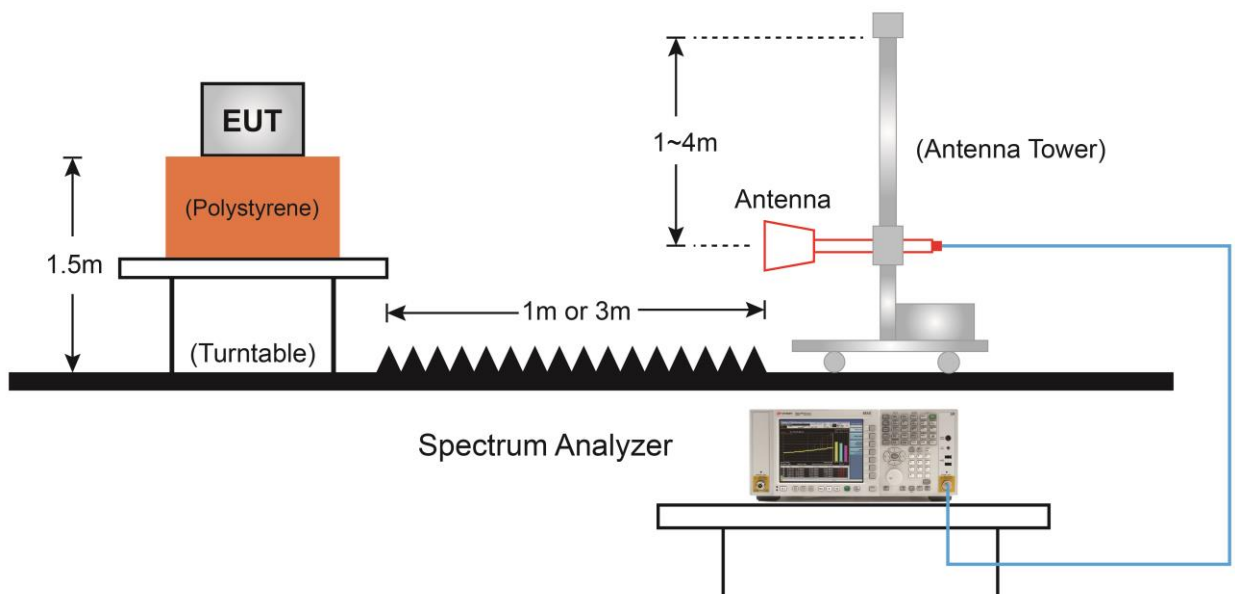

### 7.6.5.Test Result

#### Filter Configuration 1#

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

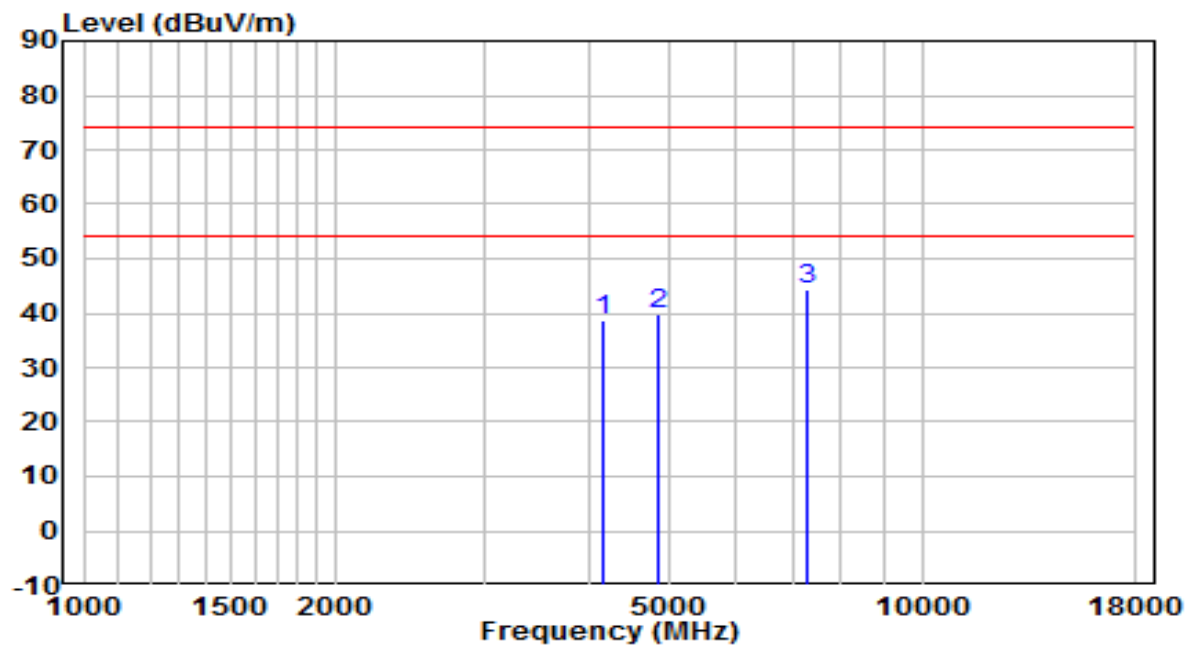


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4162.000        | 36.83          | 1.79       | 38.62                | -35.38      | 74.00          | Peak              |
| 2  | 4842.000        | 36.25          | 3.67       | 39.92                | -34.08      | 74.00          | Peak              |
| 3  | * 7315.500      | 32.20          | 12.20      | 44.40                | -29.60      | 74.00          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

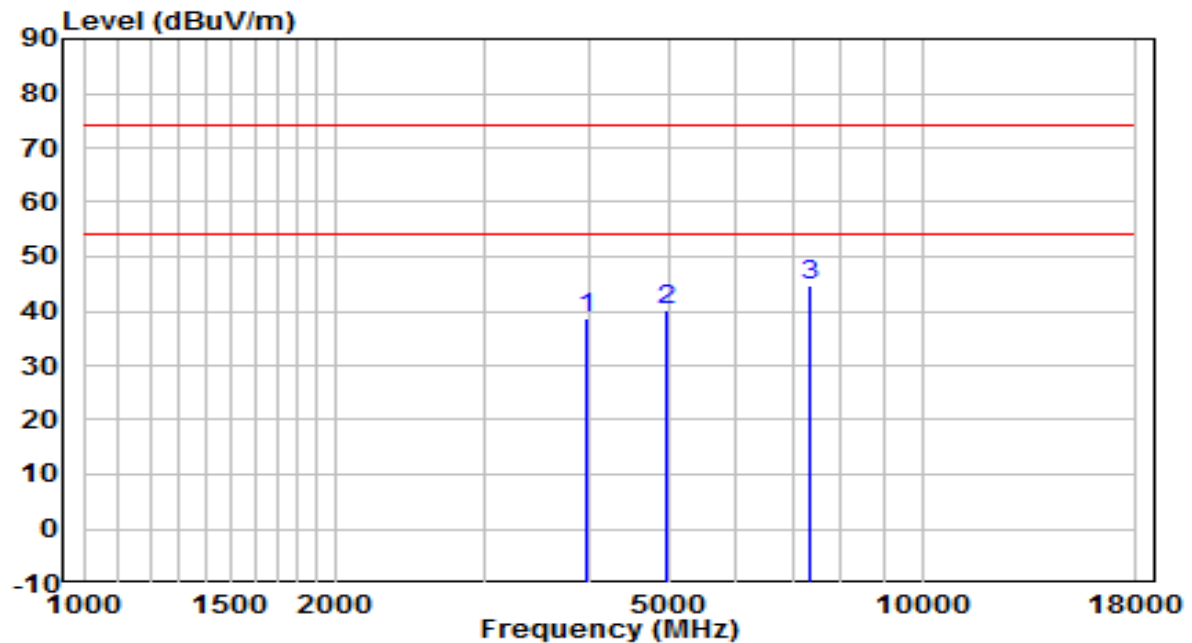


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3975.000        | 37.40          | 1.10       | 38.51                | -35.49      | 74.00          | Peak              |
| 2  | 4944.000        | 36.52          | 3.85       | 40.37                | -33.63      | 74.00          | Peak              |
| 3  | * 7332.500      | 32.35          | 12.27      | 44.63                | -29.37      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

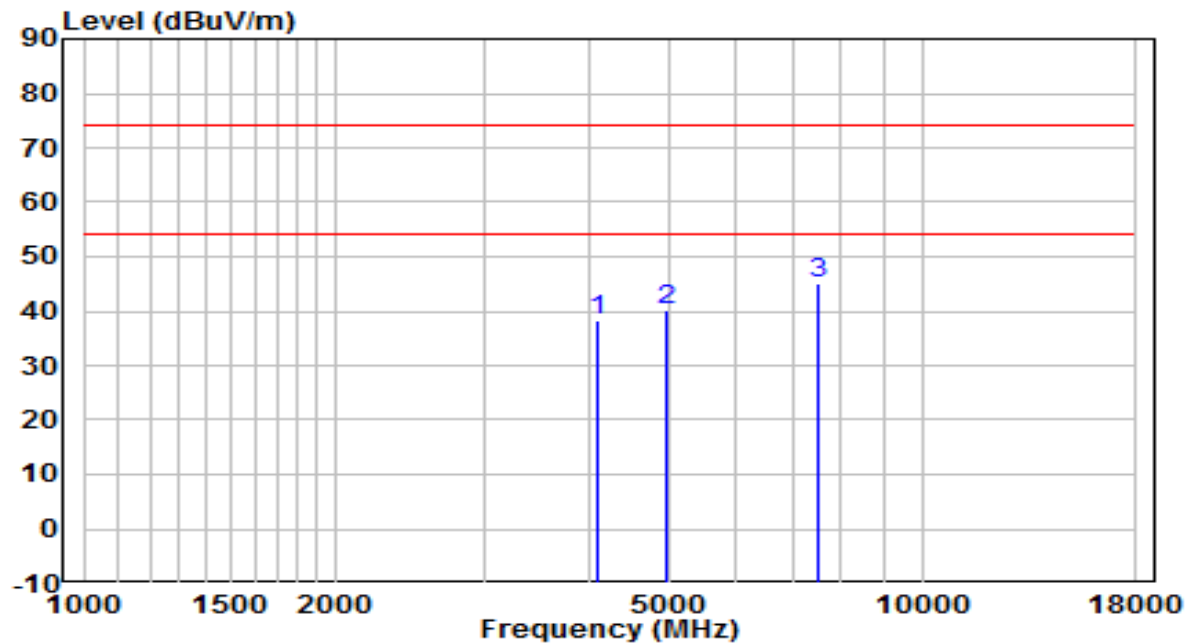


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4102.500        | 36.73          | 1.56       | 38.29                | -35.71      | 74.00          | Peak              |
| 2  | 4952.500        | 36.26          | 3.86       | 40.13                | -33.87      | 74.00          | Peak              |
| 3  | * 7502.500      | 32.05          | 13.02      | 45.06                | -28.94      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

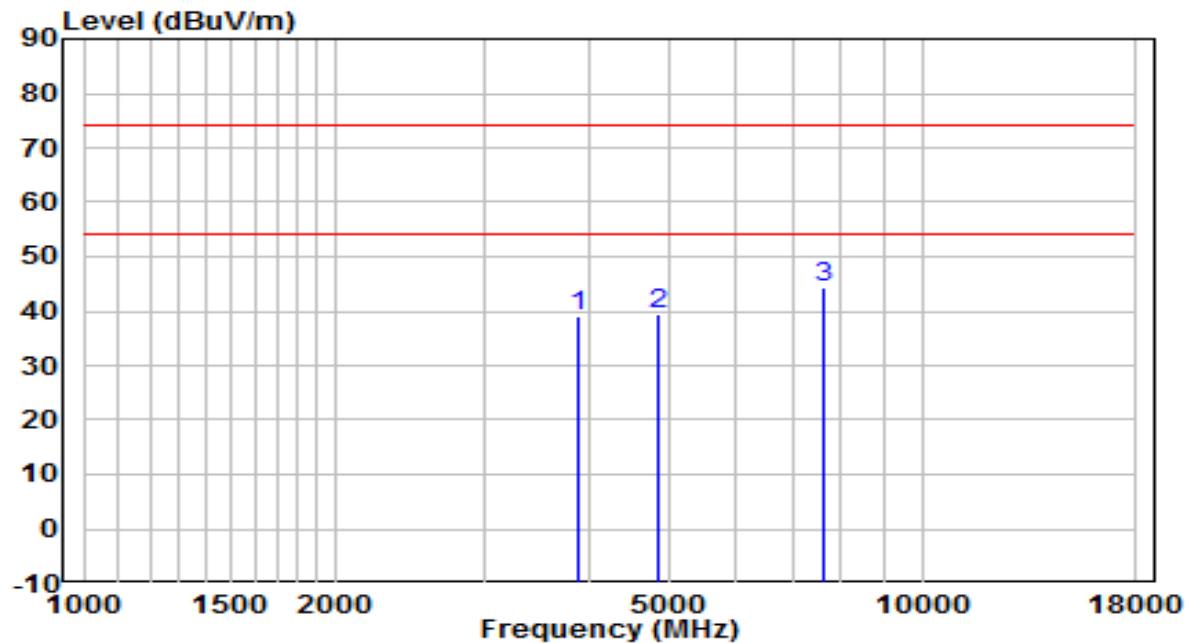


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3881.500        | 38.22          | 0.82       | 39.04                | -34.96      | 74.00          | Peak              |
| 2  | 4842.000        | 35.86          | 3.67       | 39.52                | -34.48      | 74.00          | Peak              |
| 3  | * 7630.000      | 31.19          | 13.12      | 44.32                | -29.68      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

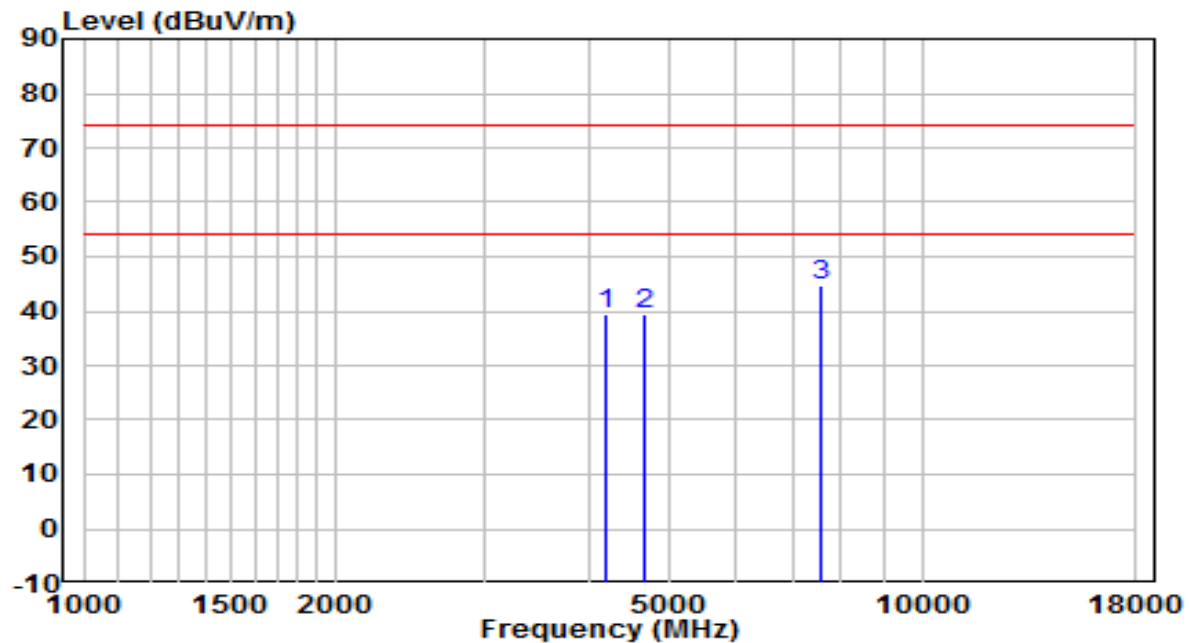


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4204.500        | 37.34          | 1.94       | 39.29                | -34.71      | 74.00          | Peak              |
| 2  | 4655.000        | 36.21          | 3.33       | 39.54                | -34.46      | 74.00          | Peak              |
| 3  | * 7579.000      | 31.69          | 13.08      | 44.77                | -29.23      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

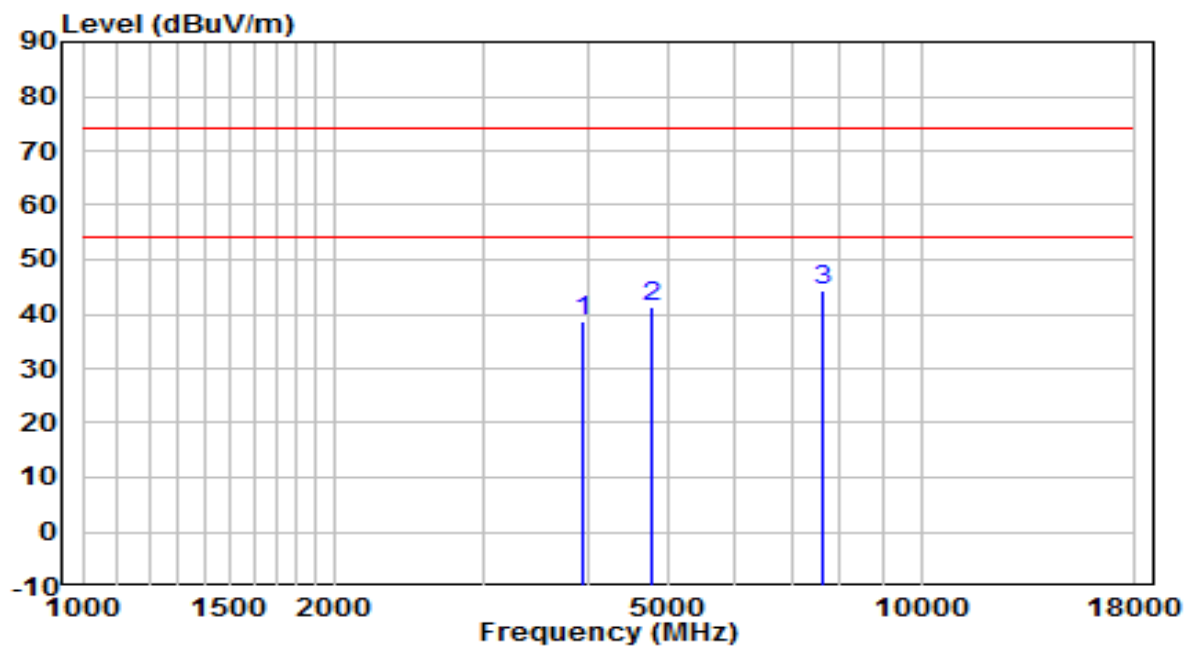


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3941.000        | 37.86          | 1.00       | 38.86                | -35.14      | 74.00          | Peak              |
| 2  | 4774.000        | 37.88          | 3.54       | 41.42                | -32.58      | 74.00          | Peak              |
| 3  | * 7655.500      | 31.01          | 13.14      | 44.16                | -29.84      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

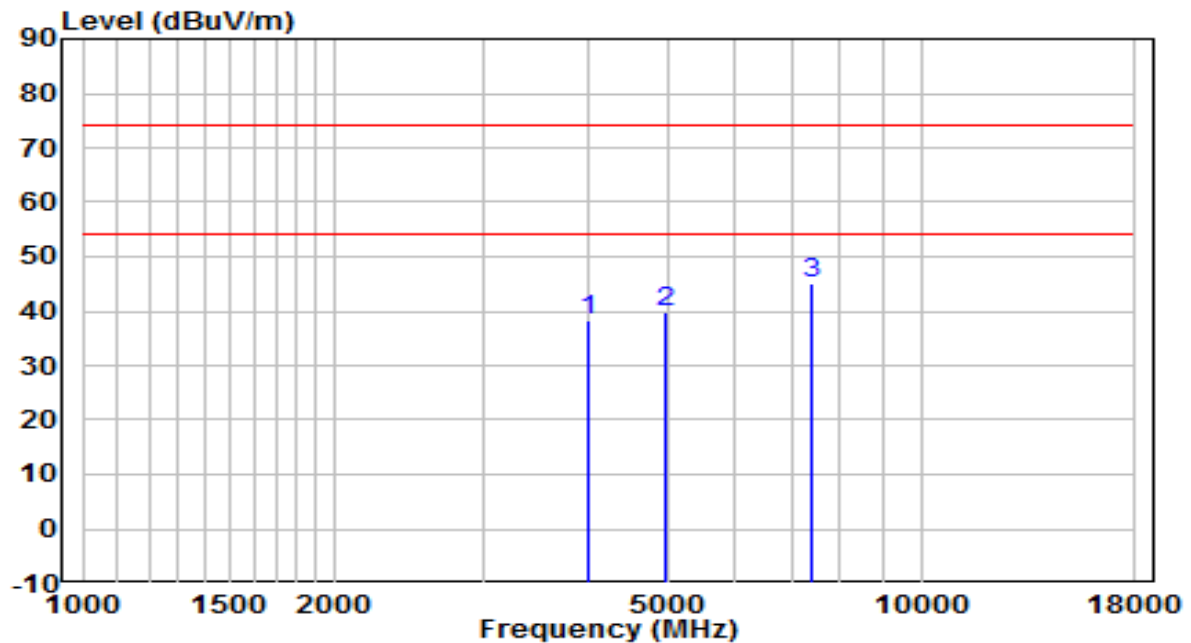


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4017.500        | 37.16          | 1.25       | 38.40                | -35.60      | 74.00          | Peak              |
| 2  | 4944.000        | 35.87          | 3.85       | 39.72                | -34.28      | 74.00          | Peak              |
| 3  | * 7400.500      | 32.64          | 12.57      | 45.21                | -28.79      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

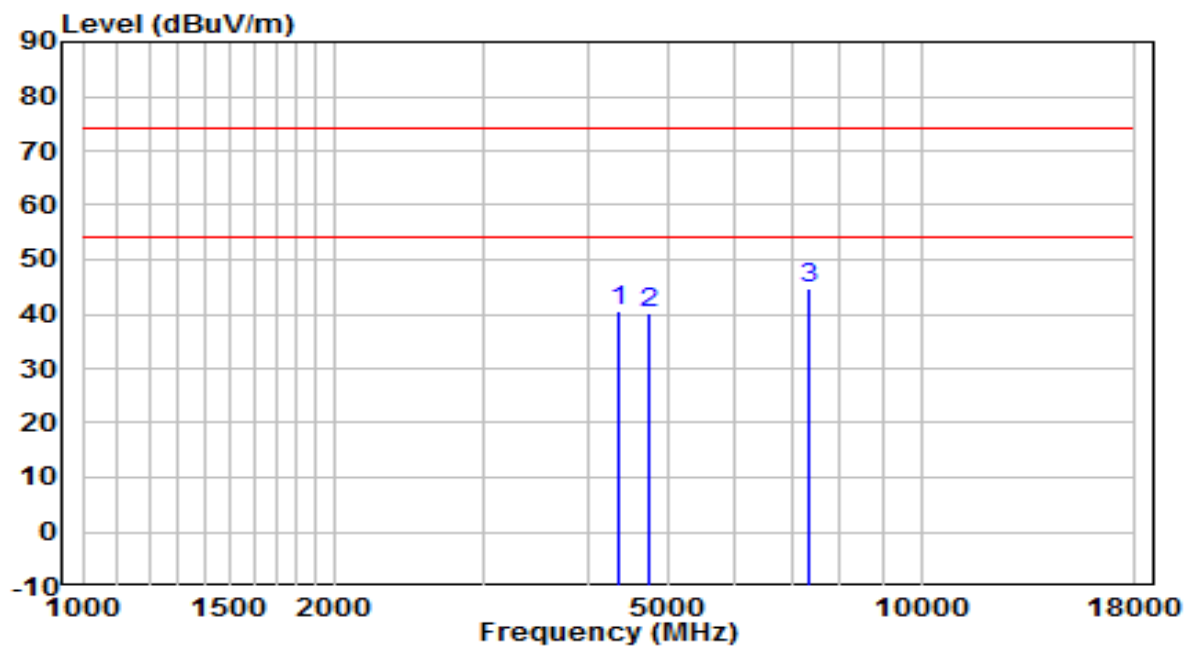


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4366.000        | 38.05          | 2.55       | 40.60                | -33.40      | 74.00          | Peak              |
| 2  | 4740.000        | 36.57          | 3.48       | 40.05                | -33.95      | 74.00          | Peak              |
| 3  | * 7341.000      | 32.28          | 12.31      | 44.59                | -29.41      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

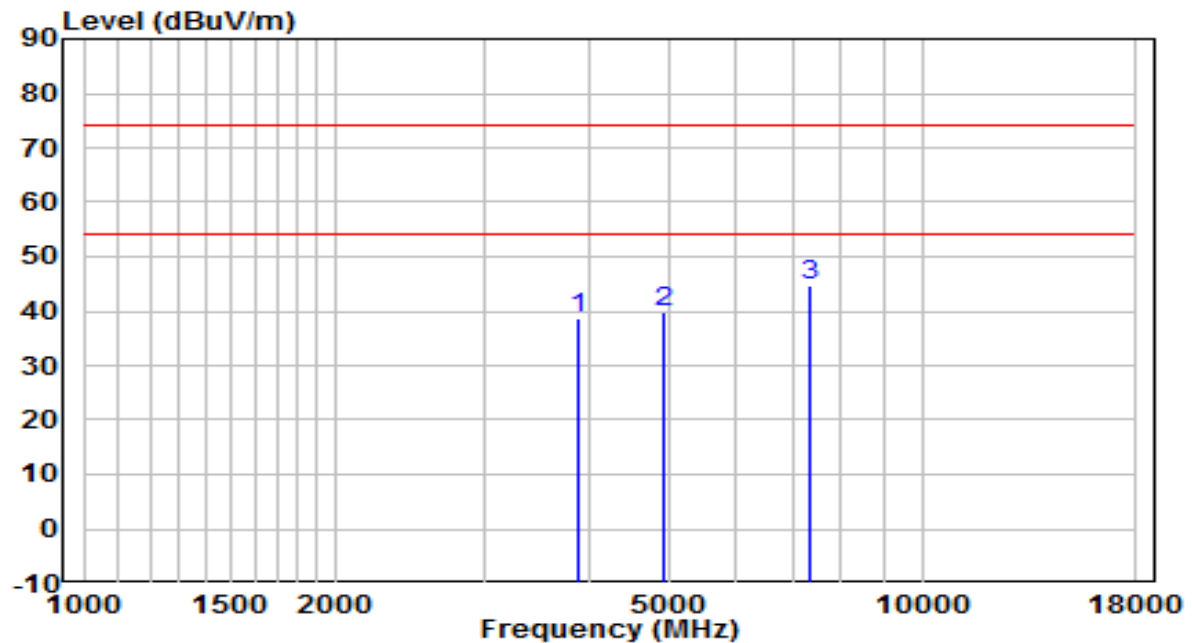


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3890.000        | 37.83          | 0.85       | 38.67                | -35.33      | 74.00          | Peak              |
| 2  | 4901.500        | 35.92          | 3.77       | 39.69                | -34.31      | 74.00          | Peak              |
| 3  | * 7332.500      | 32.44          | 12.27      | 44.71                | -29.29      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

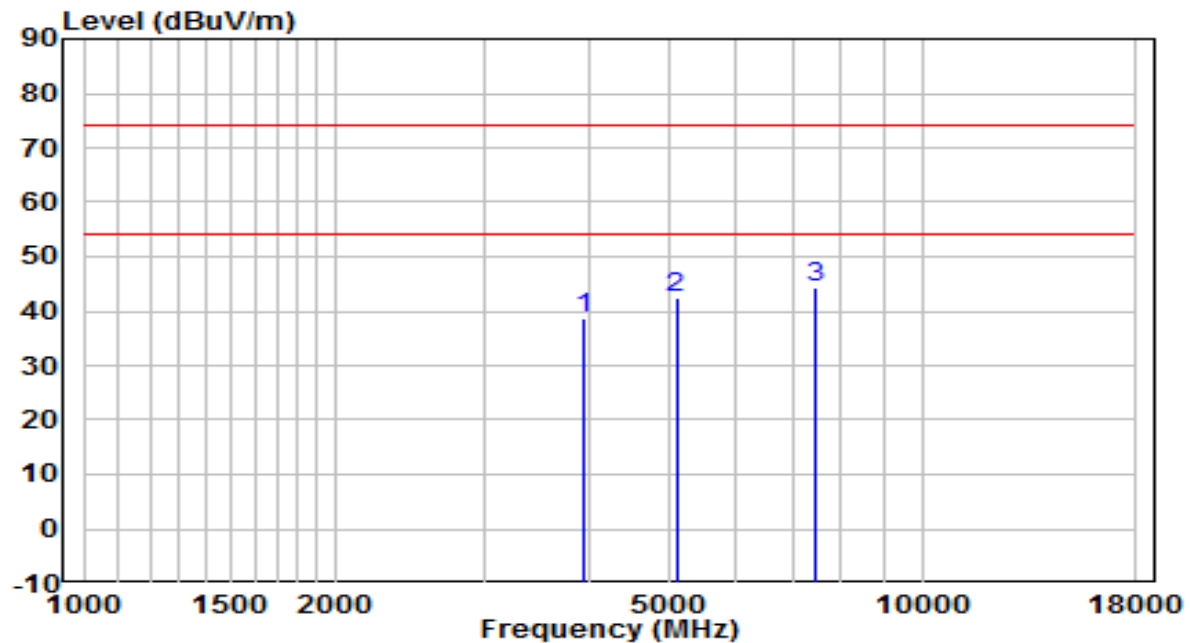


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3958.000        | 37.53          | 1.05       | 38.58                | -35.42      | 74.00          | Peak              |
| 2  | 5088.500        | 38.18          | 4.10       | 42.27                | -31.73      | 74.00          | Peak              |
| 3  | * 7460.000      | 31.42          | 12.84      | 44.26                | -29.74      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

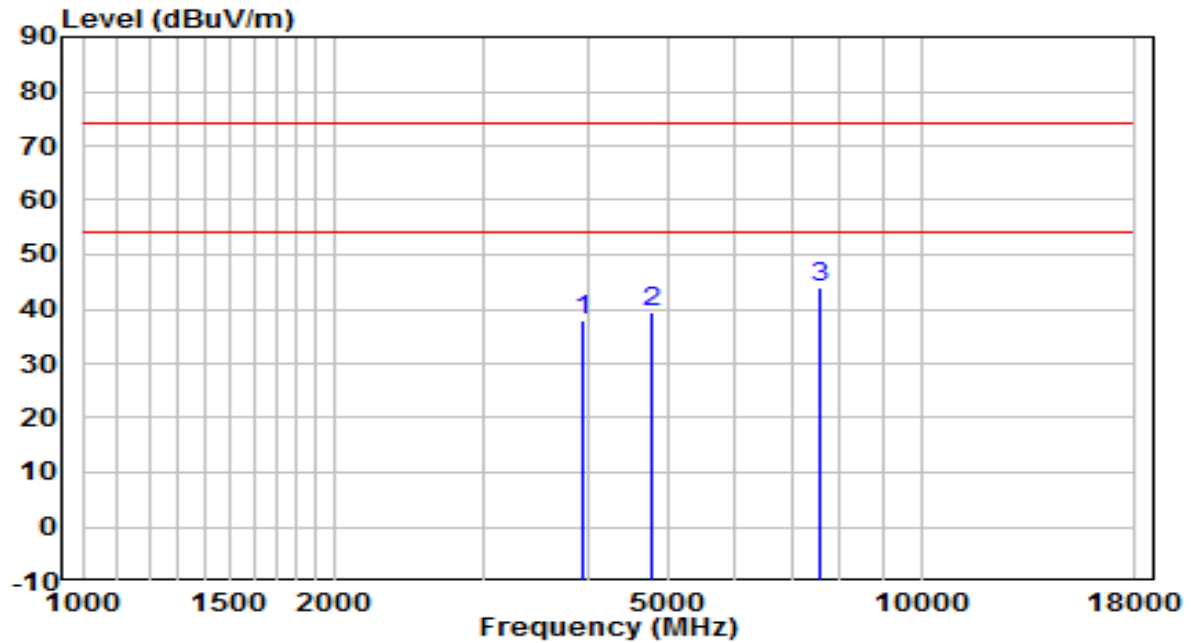


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3949.500        | 36.95          | 1.03       | 37.98                | -36.02      | 74.00          | Peak              |
| 2  | 4757.000        | 35.87          | 3.51       | 39.38                | -34.62      | 74.00          | Peak              |
| 3  | * 7553.500      | 30.85          | 13.06      | 43.91                | -30.09      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

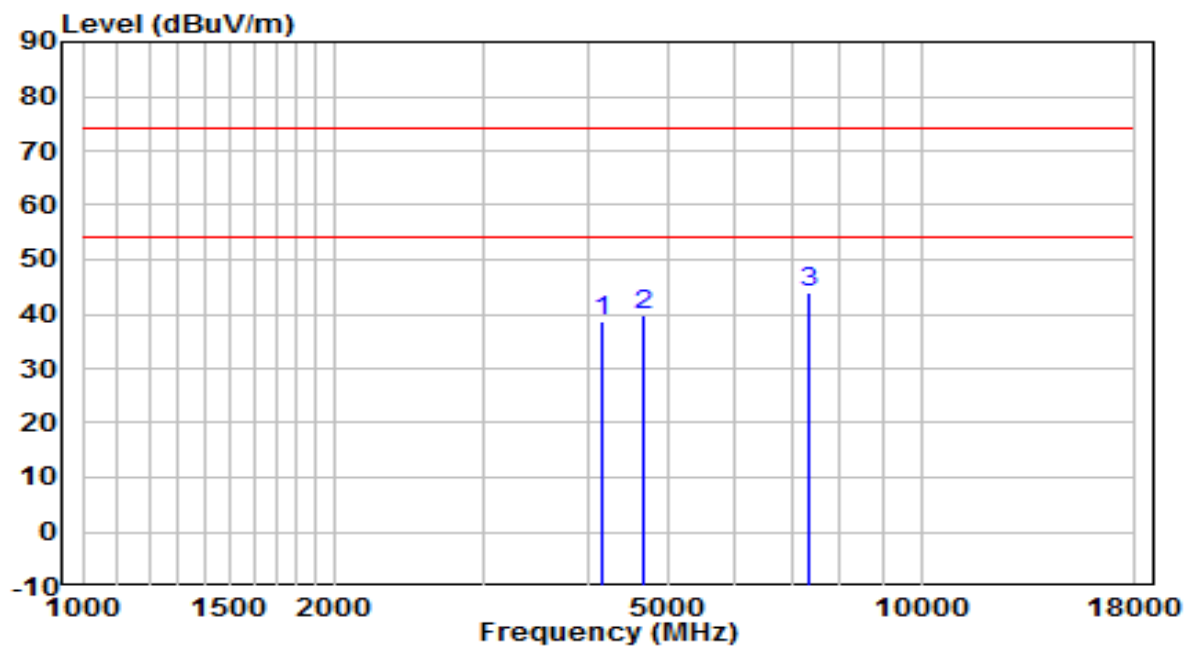


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4162.000        | 36.76          | 1.79       | 38.55                | -35.45      | 74.00          | Peak              |
| 2  | 4680.500        | 36.30          | 3.37       | 39.67                | -34.33      | 74.00          | Peak              |
| 3  | * 7366.500      | 31.67          | 12.42      | 44.10                | -29.90      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

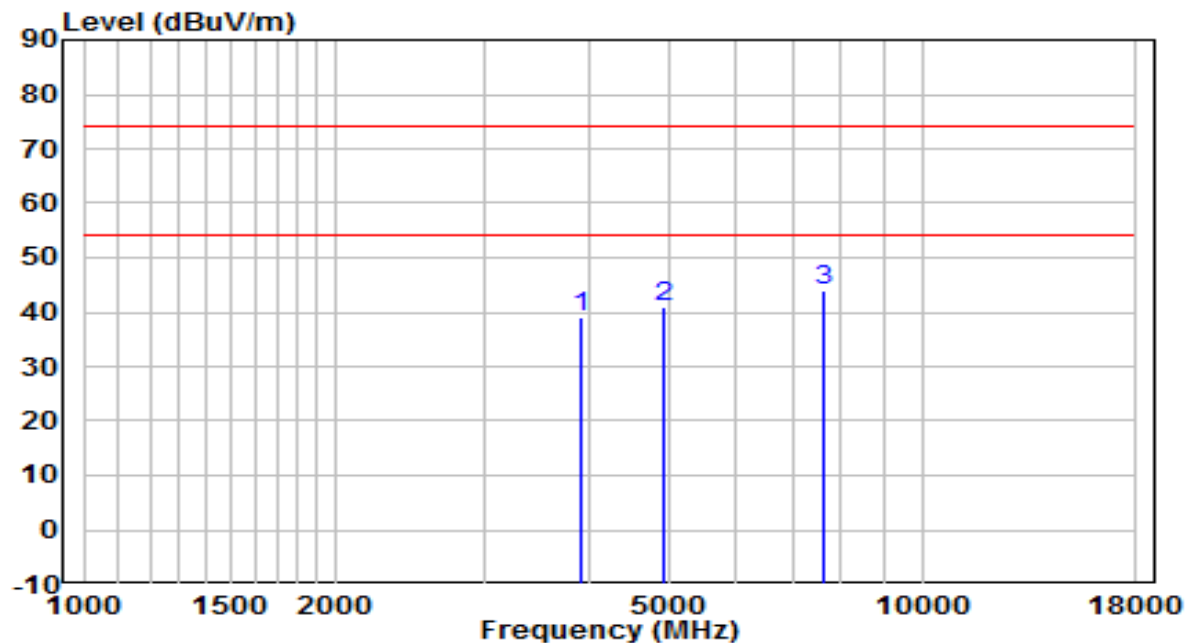


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3907.000        | 37.99          | 0.90       | 38.89                | -35.11      | 74.00          | Peak              |
| 2  | 4901.500        | 37.13          | 3.77       | 40.90                | -33.10      | 74.00          | Peak              |
| 3  | * 7638.500      | 30.95          | 13.13      | 44.08                | -29.92      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

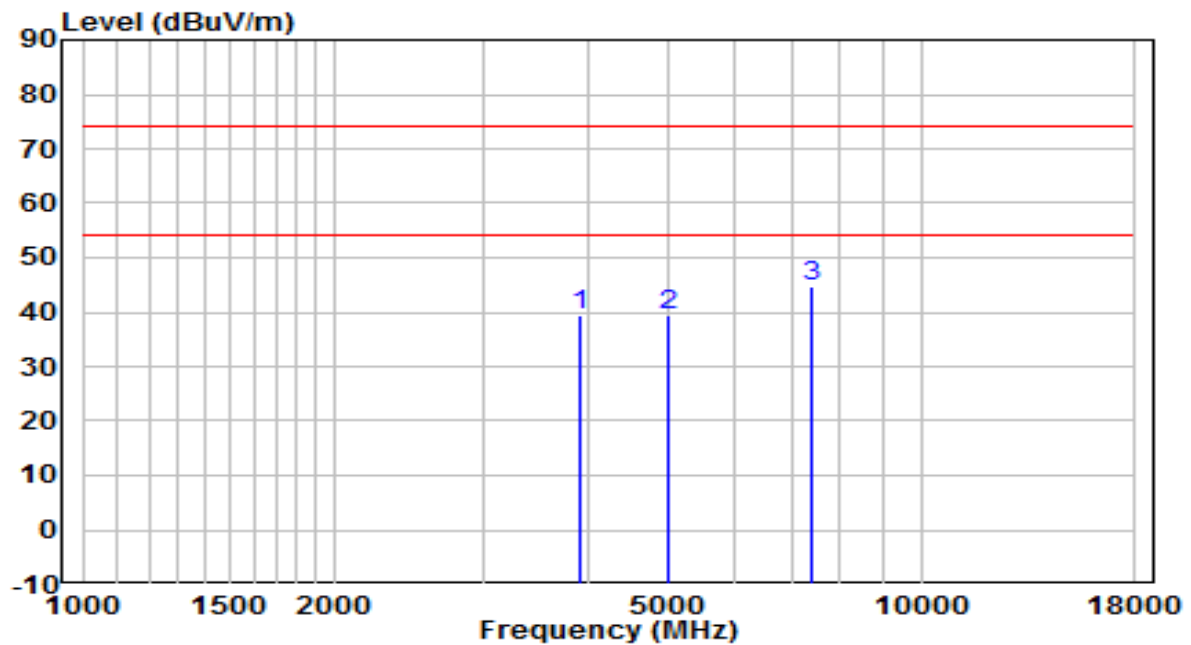


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3907.000        | 38.60          | 0.90       | 39.50                | -34.50      | 74.00          | Peak              |
| 2  | 5003.500        | 35.50          | 3.96       | 39.46                | -34.54      | 74.00          | Peak              |
| 3  | * 7409.000      | 32.05          | 12.61      | 44.66                | -29.34      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

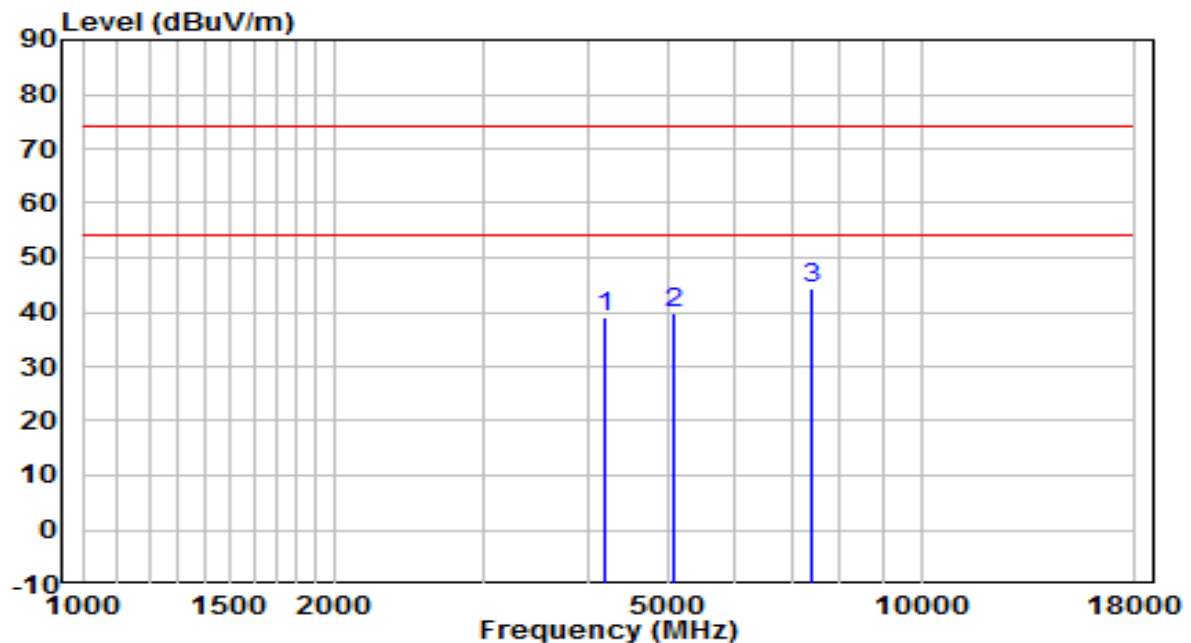


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4204.500        | 37.05          | 1.94       | 38.99                | -35.01      | 74.00          | Peak              |
| 2  | 5071.500        | 35.58          | 4.07       | 39.64                | -34.36      | 74.00          | Peak              |
| 3  | * 7383.500      | 31.83          | 12.50      | 44.33                | -29.67      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

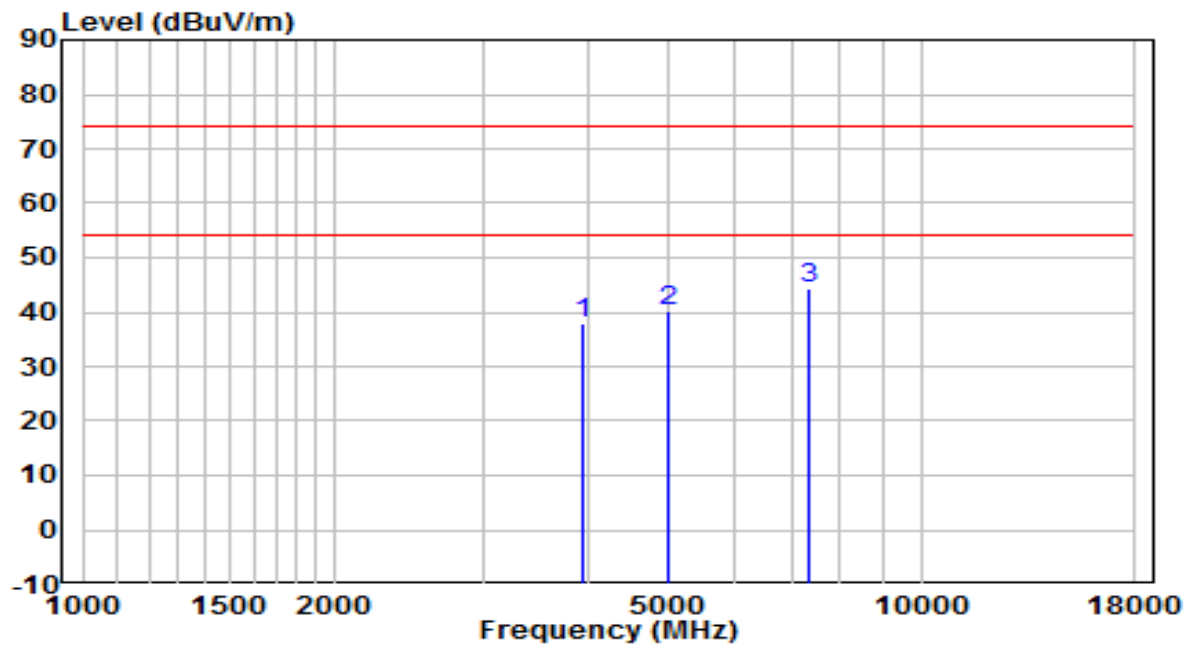


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3941.000        | 37.02          | 1.00       | 38.02                | -35.98      | 74.00          | Peak              |
| 2  | 5003.500        | 36.19          | 3.96       | 40.14                | -33.86      | 74.00          | Peak              |
| 3  | * 7332.500      | 31.95          | 12.27      | 44.22                | -29.78      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

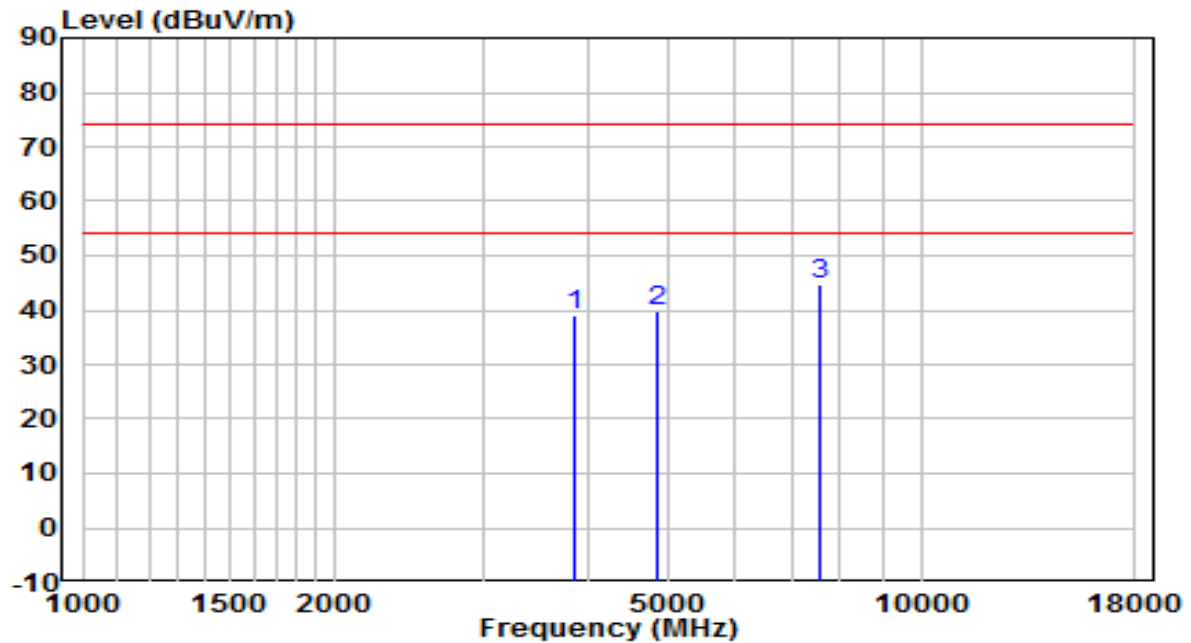


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3864.500        | 38.20          | 0.77       | 38.97                | -35.03      | 74.00          | Peak              |
| 2  | 4842.000        | 36.28          | 3.67       | 39.95                | -34.05      | 74.00          | Peak              |
| 3  | * 7596.000      | 31.55          | 13.09      | 44.64                | -29.36      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

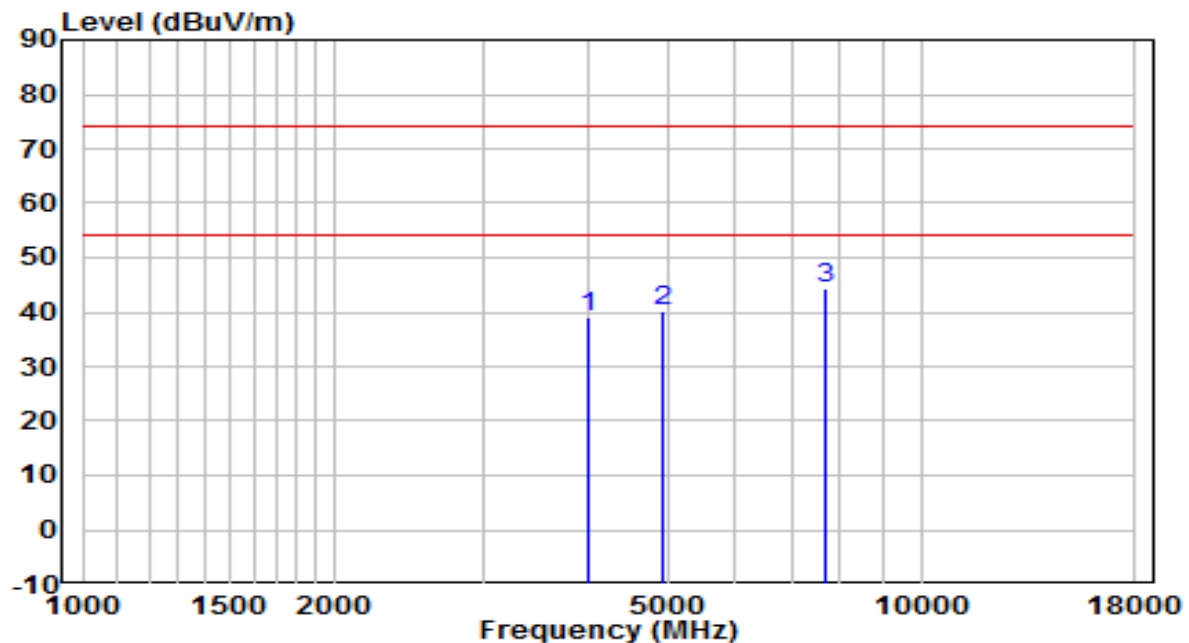


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4000.500        | 37.99          | 1.18       | 39.18                | -34.82      | 74.00          | Peak              |
| 2  | 4935.500        | 36.38          | 3.83       | 40.21                | -33.79      | 74.00          | Peak              |
| 3  | * 7664.000      | 31.17          | 13.15      | 44.32                | -29.68      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

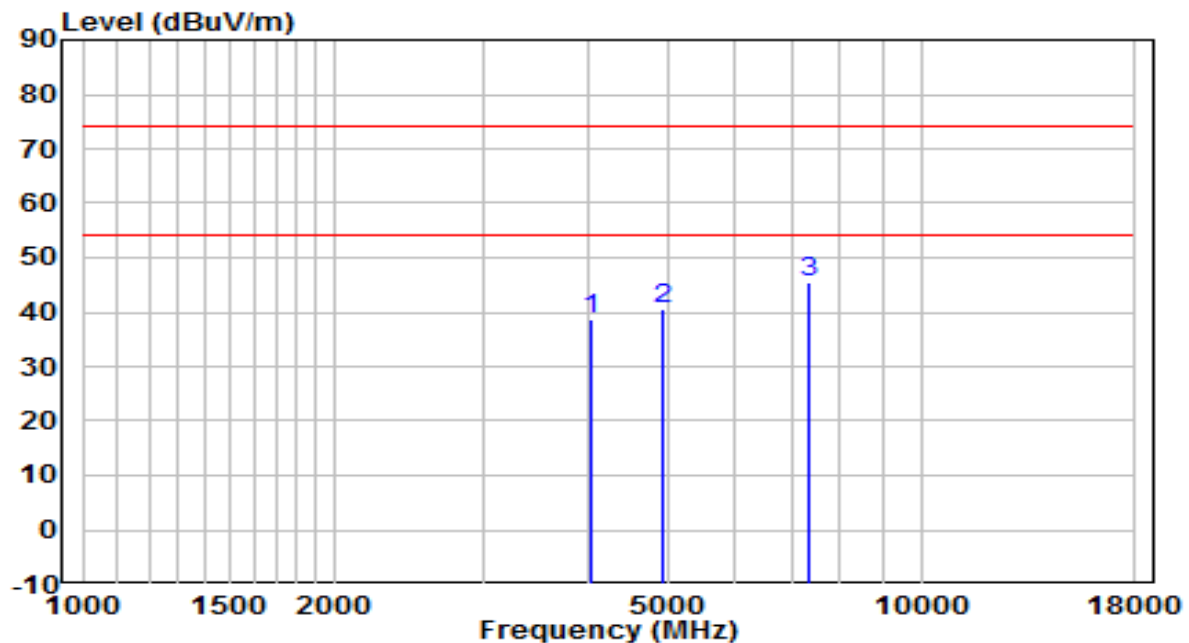


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4034.500        | 37.27          | 1.31       | 38.58                | -35.42      | 74.00          | Peak              |
| 2  | 4910.000        | 36.78          | 3.79       | 40.57                | -33.43      | 74.00          | Peak              |
| 3  | * 7332.500      | 33.07          | 12.27      | 45.34                | -28.66      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

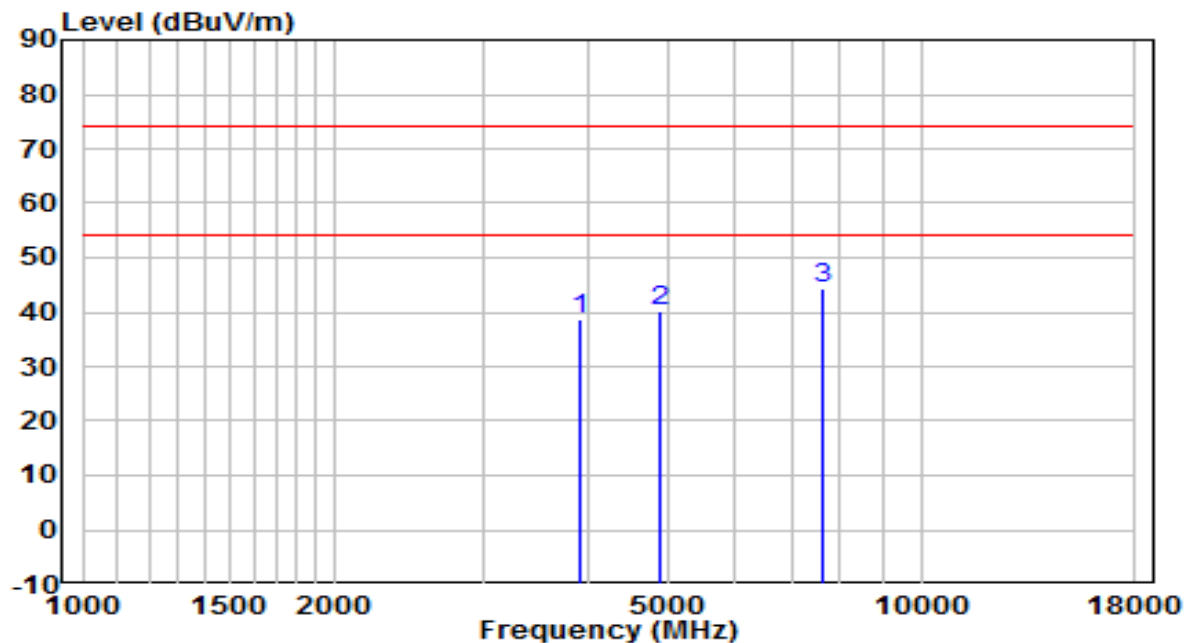


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3924.000        | 37.92          | 0.95       | 38.87                | -35.13      | 74.00          | Peak              |
| 2  | 4876.000        | 36.29          | 3.73       | 40.01                | -33.99      | 74.00          | Peak              |
| 3  | * 7613.000      | 31.16          | 13.11      | 44.27                | -29.73      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

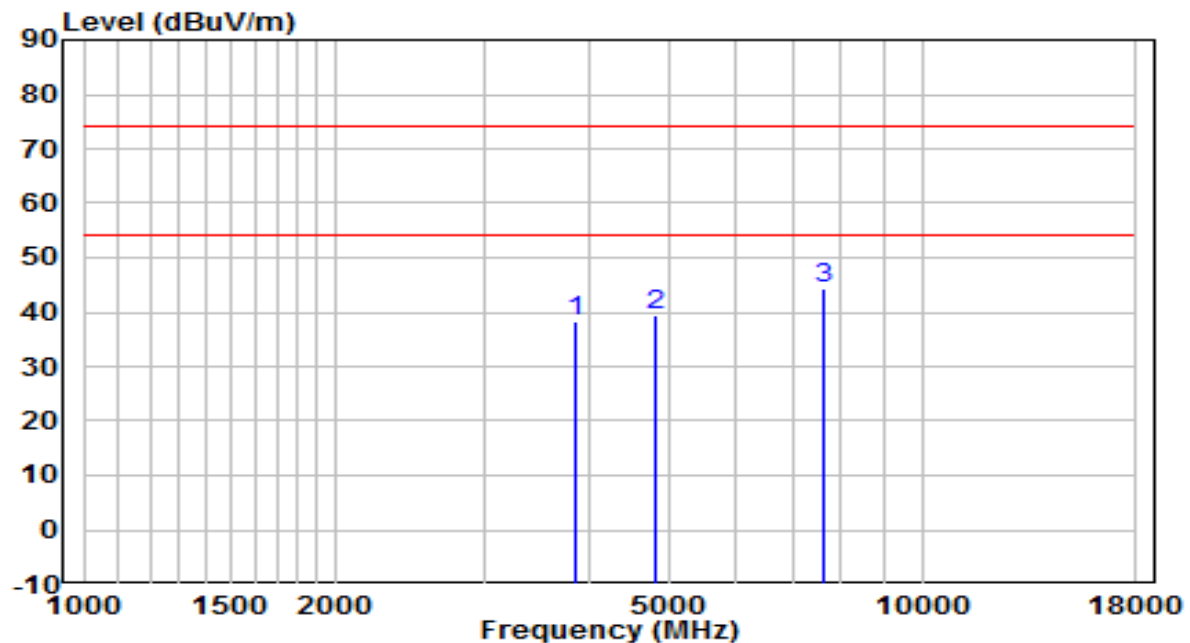


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3856.000        | 37.65          | 0.74       | 38.39                | -35.61      | 74.00          | Peak              |
| 2  | 4791.000        | 35.84          | 3.57       | 39.41                | -34.59      | 74.00          | Peak              |
| 3  | * 7638.500      | 31.37          | 13.13      | 44.50                | -29.50      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

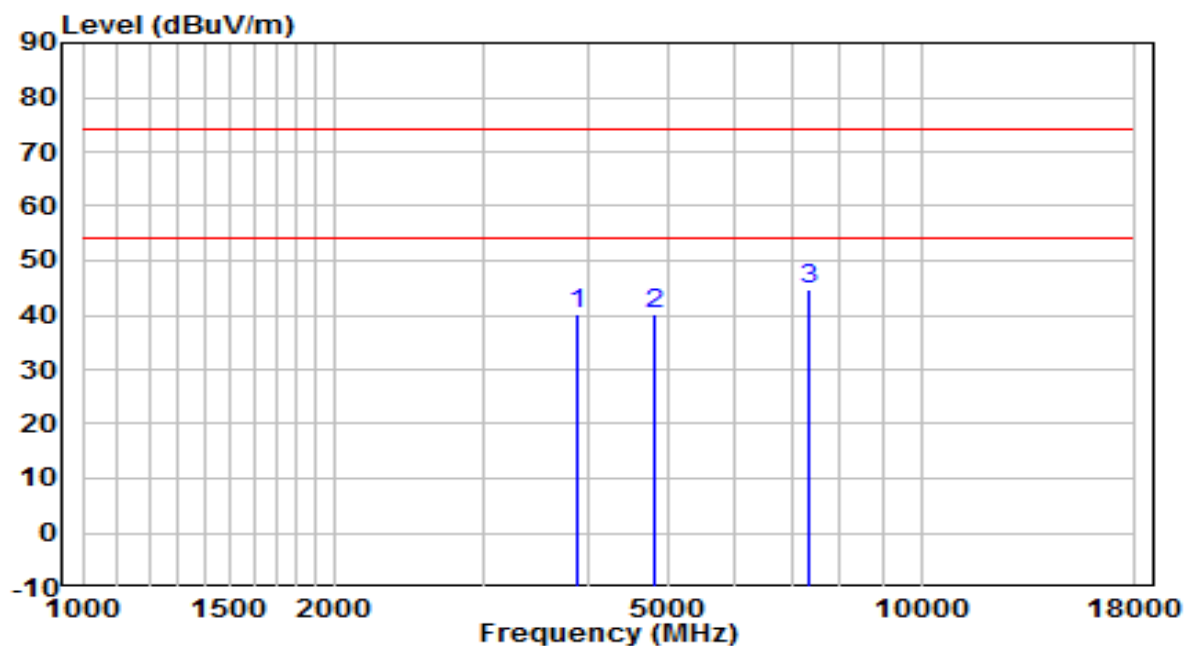


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3898.500        | 39.20          | 0.87       | 40.07                | -33.93      | 74.00          | Peak              |
| 2  | 4799.500        | 36.79          | 3.59       | 40.38                | -33.62      | 74.00          | Peak              |
| 3  | * 7332.500      | 32.49          | 12.27      | 44.76                | -29.24      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

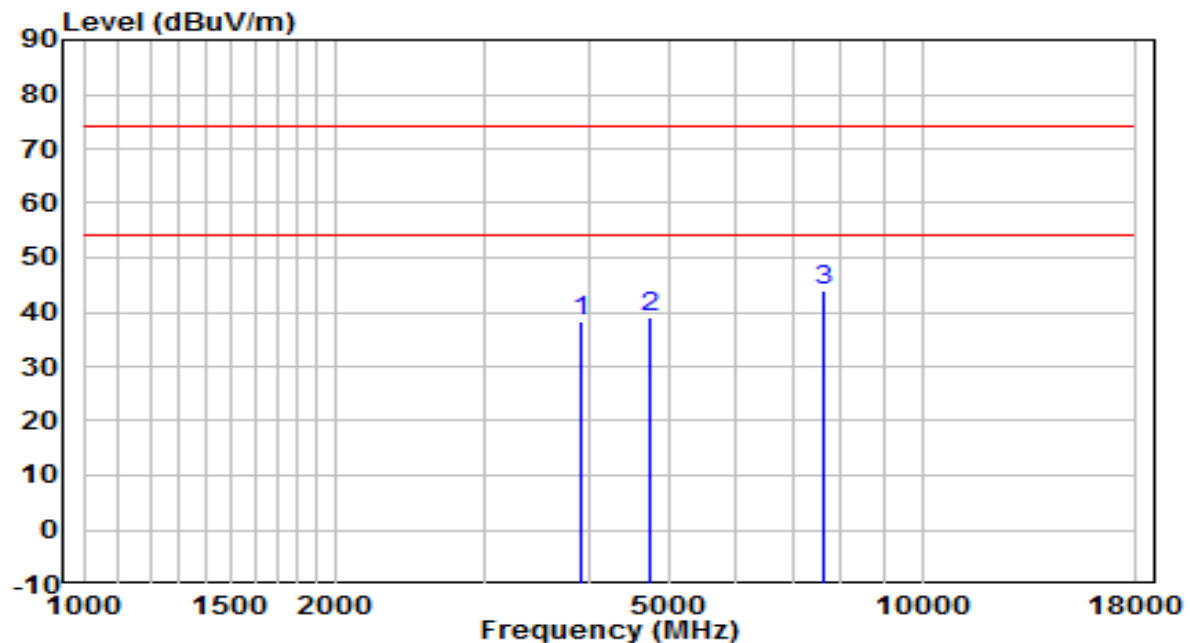


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3907.000        | 37.36          | 0.90       | 38.26                | -35.74      | 74.00          | Peak              |
| 2  | 4748.500        | 35.69          | 3.50       | 39.19                | -34.81      | 74.00          | Peak              |
| 3  | * 7613.000      | 31.01          | 13.11      | 44.11                | -29.89      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

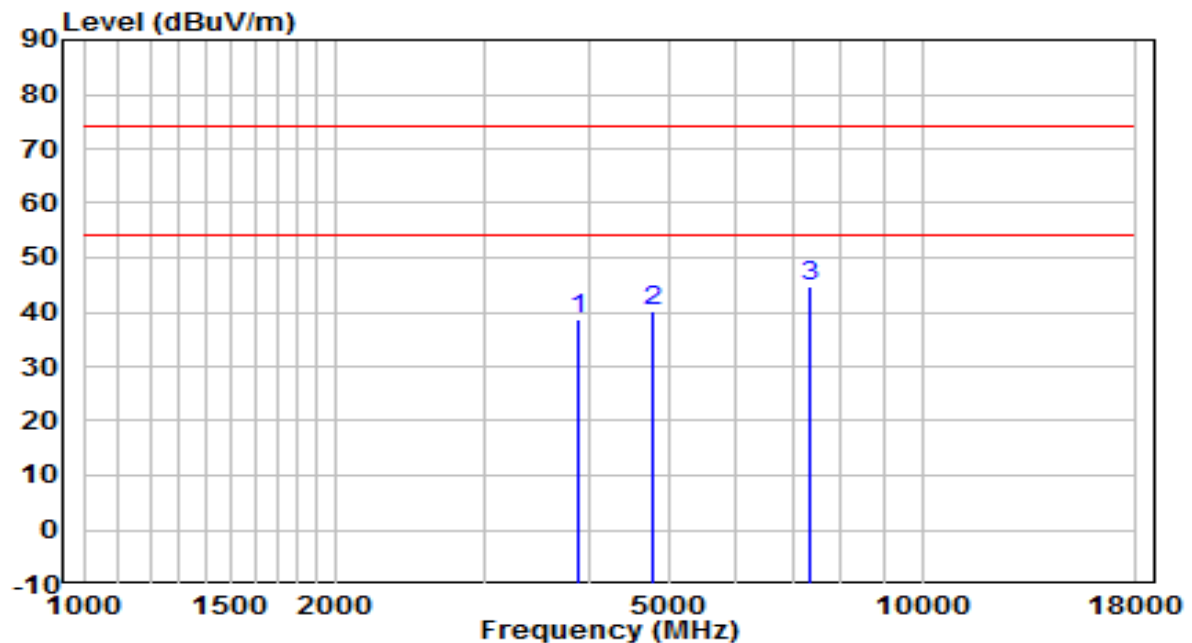


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3898.500        | 37.85          | 0.87       | 38.72                | -35.28      | 74.00          | Peak              |
| 2  | 4757.000        | 36.71          | 3.51       | 40.23                | -33.77      | 74.00          | Peak              |
| 3  | * 7324.000      | 32.62          | 12.24      | 44.86                | -29.14      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

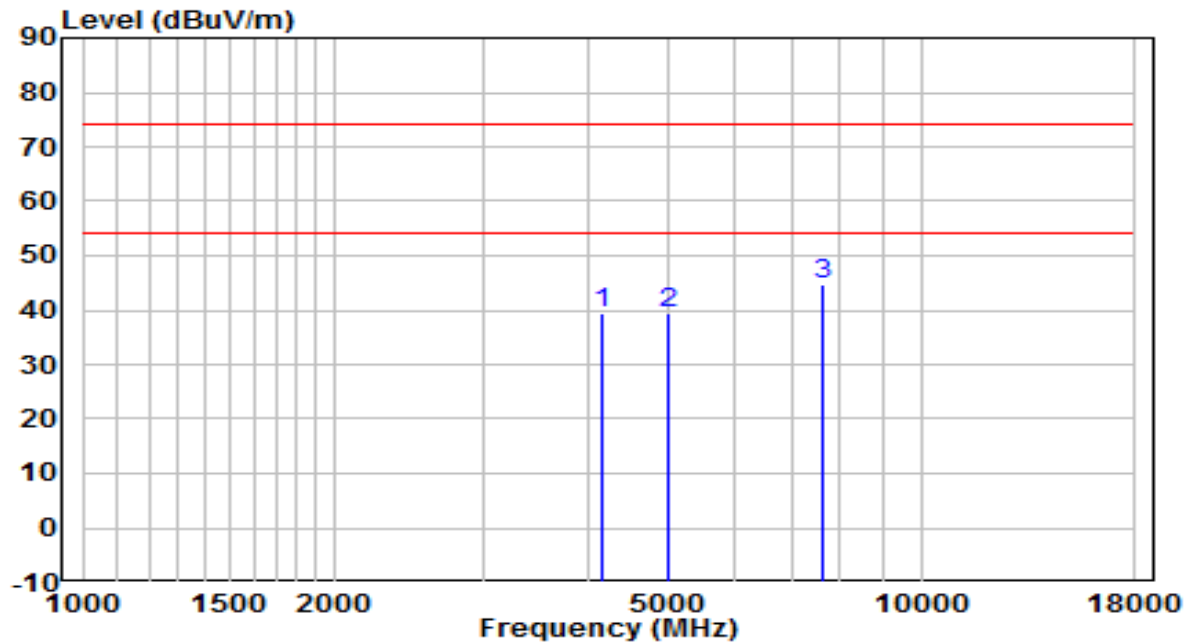


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4170.500        | 37.46          | 1.82       | 39.27                | -34.73      | 74.00          | Peak              |
| 2  | 4986.500        | 35.67          | 3.93       | 39.60                | -34.40      | 74.00          | Peak              |
| 3  | * 7655.500      | 31.59          | 13.14      | 44.73                | -29.27      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

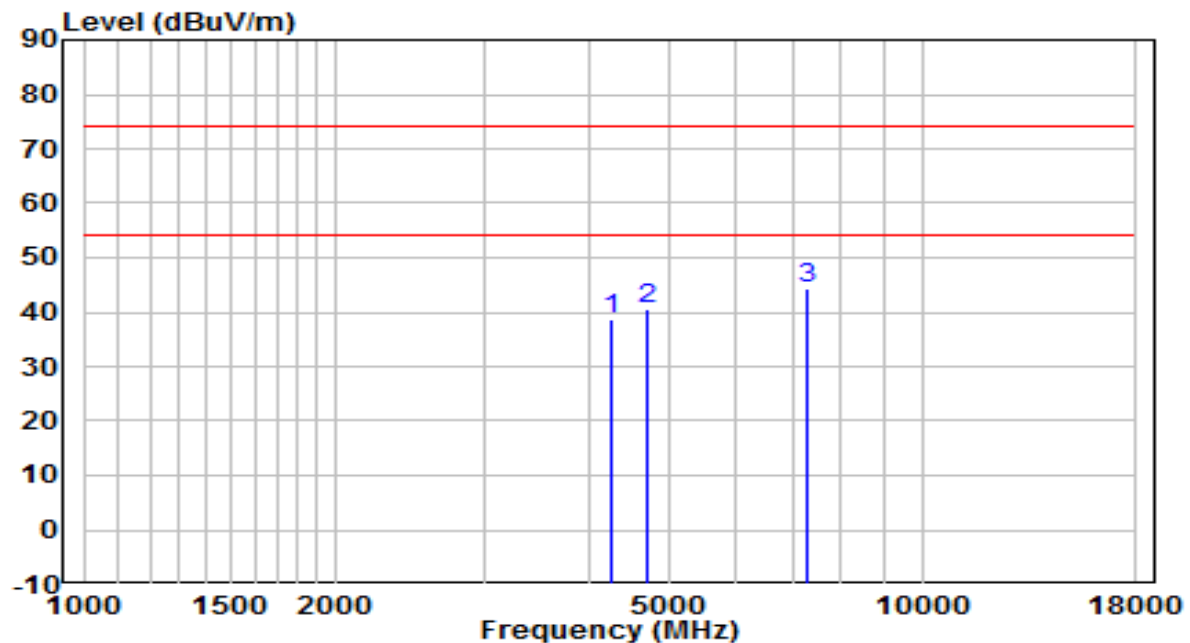


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4255.500        | 36.42          | 2.14       | 38.55                | -35.45      | 74.00          | Peak              |
| 2  | 4706.000        | 37.32          | 3.42       | 40.75                | -33.25      | 74.00          | Peak              |
| 3  | * 7315.500      | 32.24          | 12.20      | 44.44                | -29.56      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

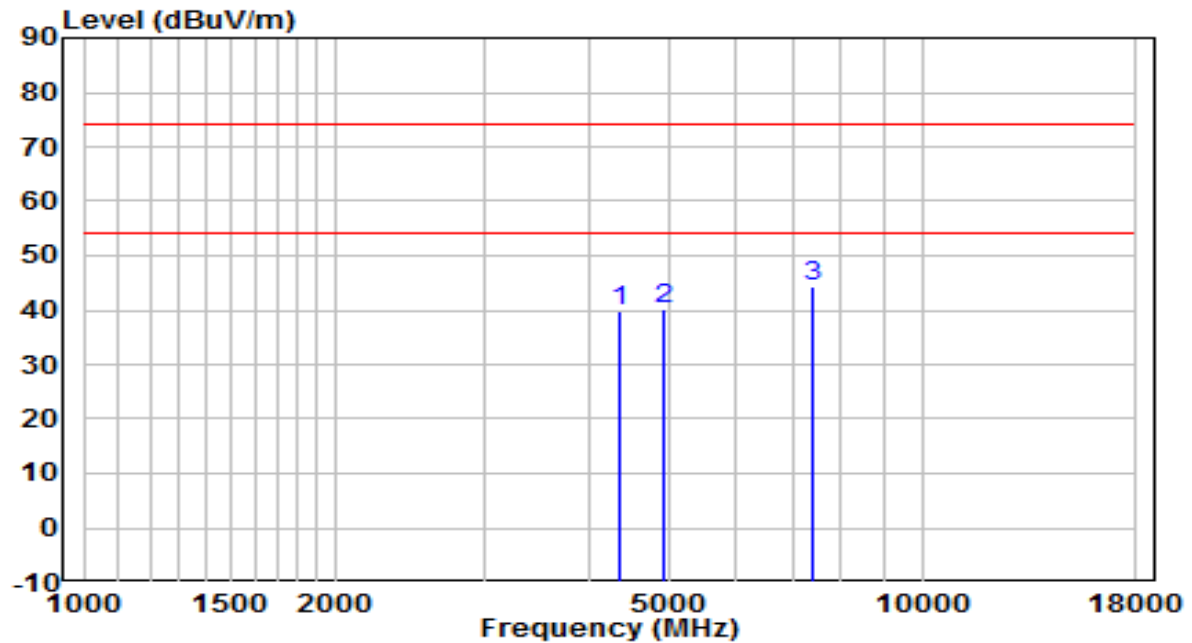


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4357.500        | 37.27          | 2.52       | 39.78                | -34.22      | 74.00          | Peak              |
| 2  | 4918.500        | 36.51          | 3.80       | 40.31                | -33.69      | 74.00          | Peak              |
| 3  | * 7392.000      | 31.76          | 12.54      | 44.29                | -29.71      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

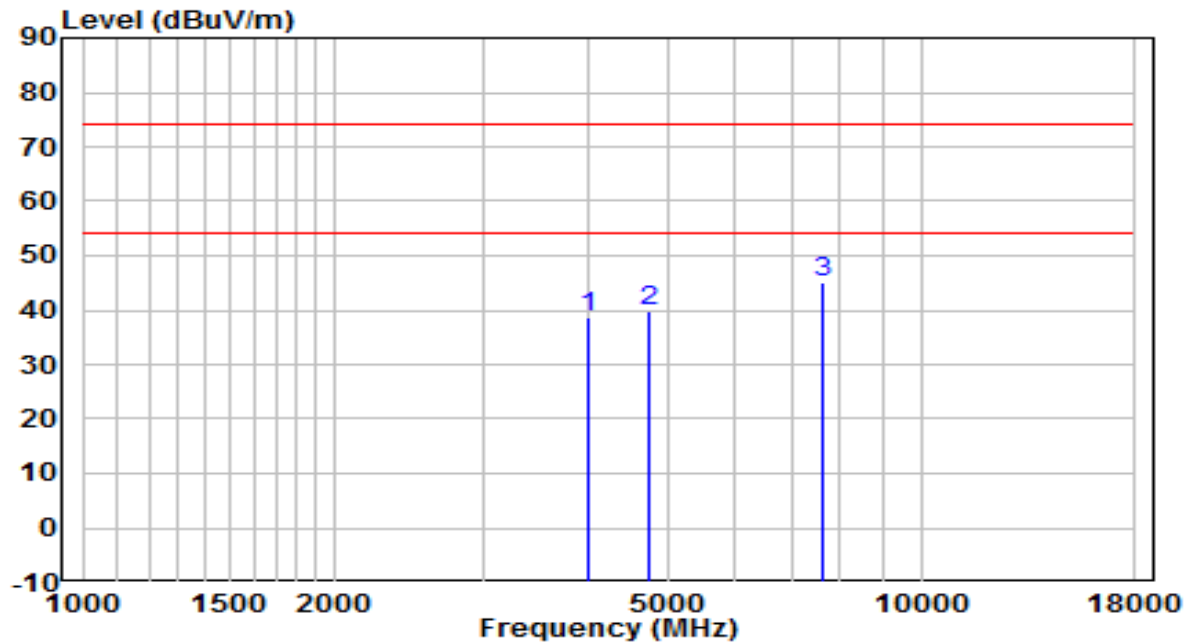


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4009.000        | 37.30          | 1.21       | 38.52                | -35.48      | 74.00          | Peak              |
| 2  | 4748.500        | 36.34          | 3.50       | 39.84                | -34.16      | 74.00          | Peak              |
| 3  | * 7613.000      | 31.88          | 13.11      | 44.99                | -29.01      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

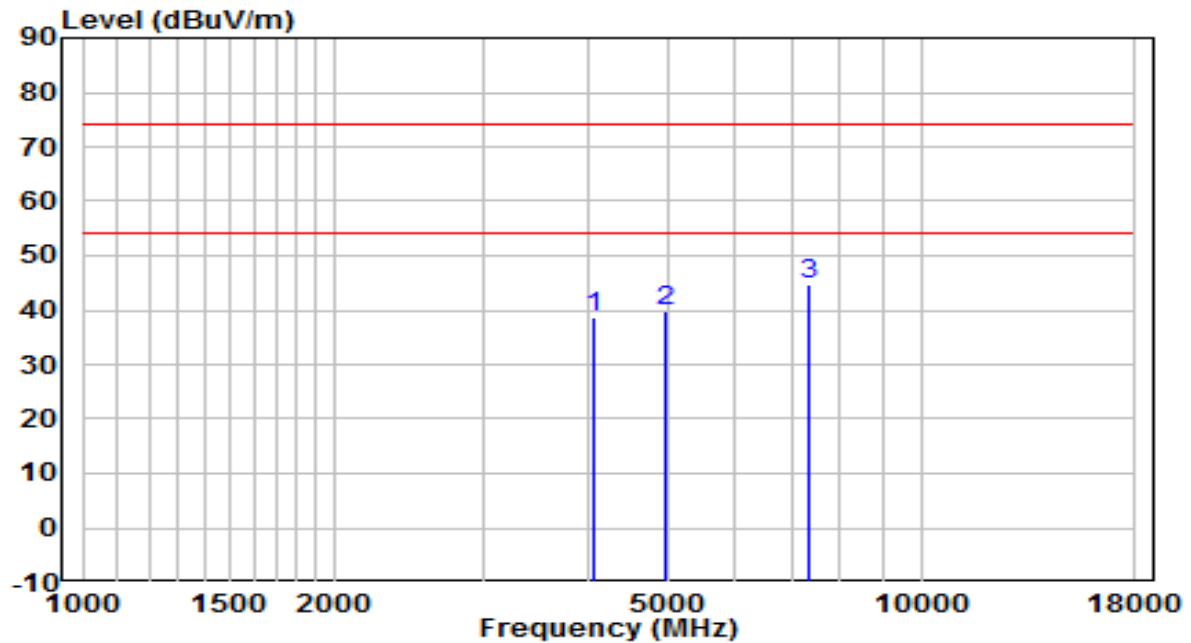


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4068.500        | 37.21          | 1.44       | 38.65                | -35.35      | 74.00          | Peak              |
| 2  | 4961.000        | 35.76          | 3.88       | 39.64                | -34.36      | 74.00          | Peak              |
| 3  | * 7341.000      | 32.40          | 12.31      | 44.71                | -29.29      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

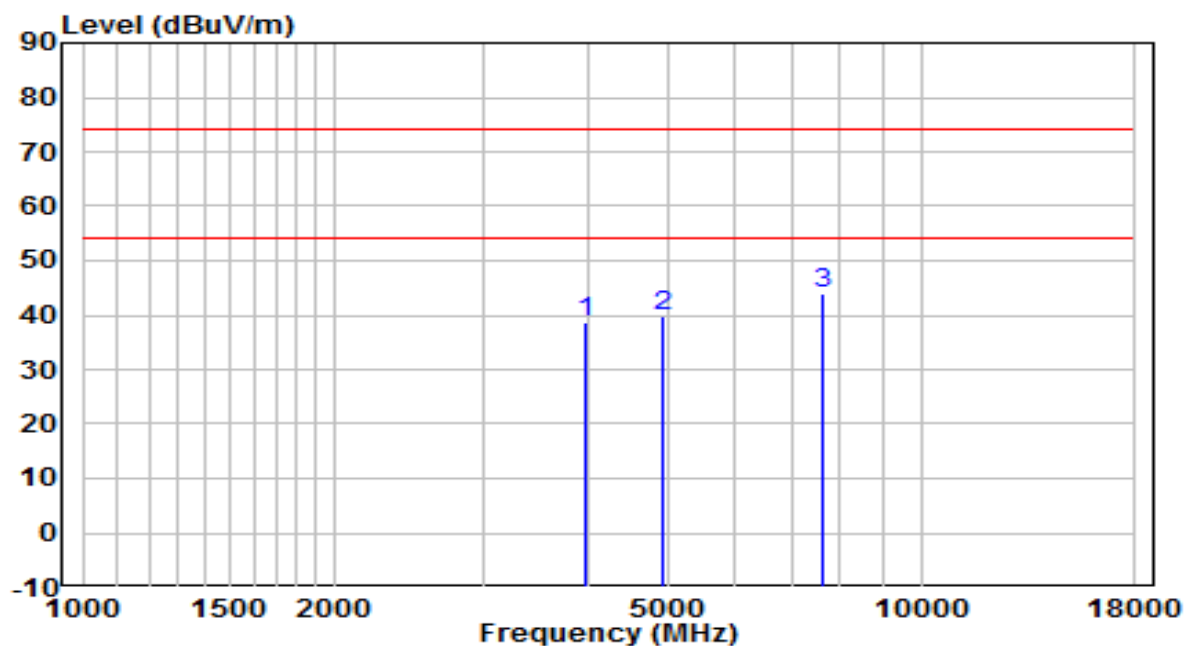


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3975.000        | 37.58          | 1.10       | 38.69                | -35.31      | 74.00          | Peak              |
| 2  | 4927.000        | 35.97          | 3.82       | 39.78                | -34.22      | 74.00          | Peak              |
| 3  | * 7621.500      | 30.89          | 13.12      | 44.01                | -29.99      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

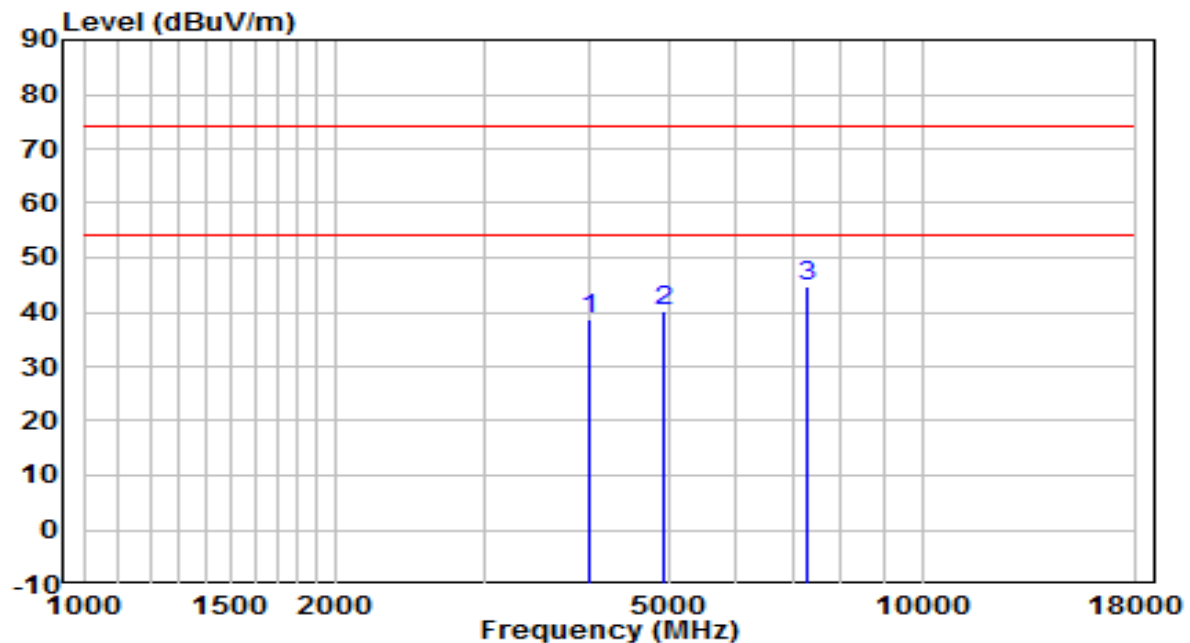


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4017.500        | 37.33          | 1.25       | 38.58                | -35.42      | 74.00          | Peak              |
| 2  | 4935.500        | 36.53          | 3.83       | 40.36                | -33.64      | 74.00          | Peak              |
| 3  | * 7298.500      | 32.46          | 12.12      | 44.59                | -29.41      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

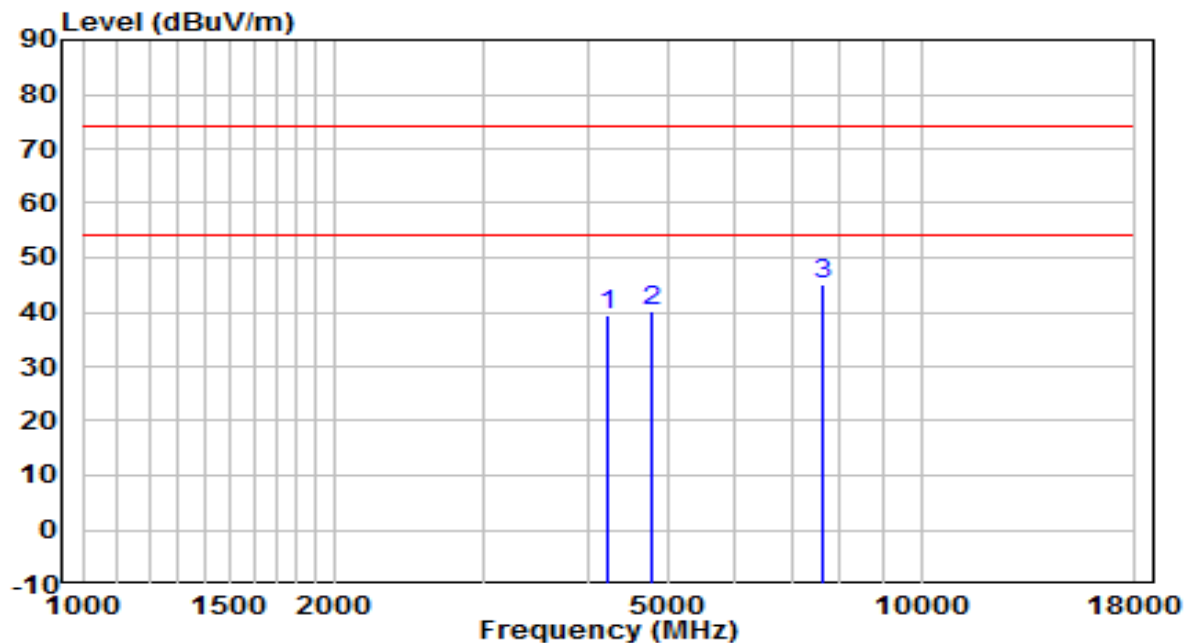


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4213.000        | 37.37          | 1.98       | 39.35                | -34.65      | 74.00          | Peak              |
| 2  | 4765.500        | 36.70          | 3.53       | 40.22                | -33.78      | 74.00          | Peak              |
| 3  | * 7630.000      | 32.03          | 13.12      | 45.15                | -28.85      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

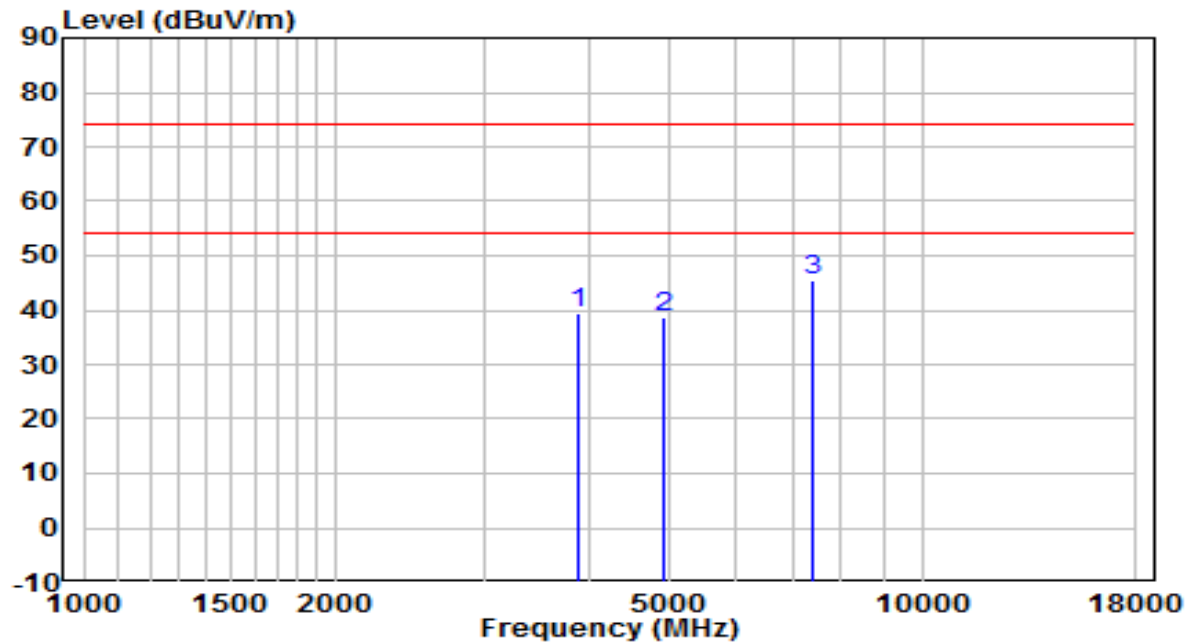


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3898.500        | 38.55          | 0.87       | 39.42                | -34.58      | 74.00          | Peak              |
| 2  | 4901.500        | 35.00          | 3.77       | 38.78                | -35.22      | 74.00          | Peak              |
| 3  | * 7400.500      | 32.86          | 12.57      | 45.43                | -28.57      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

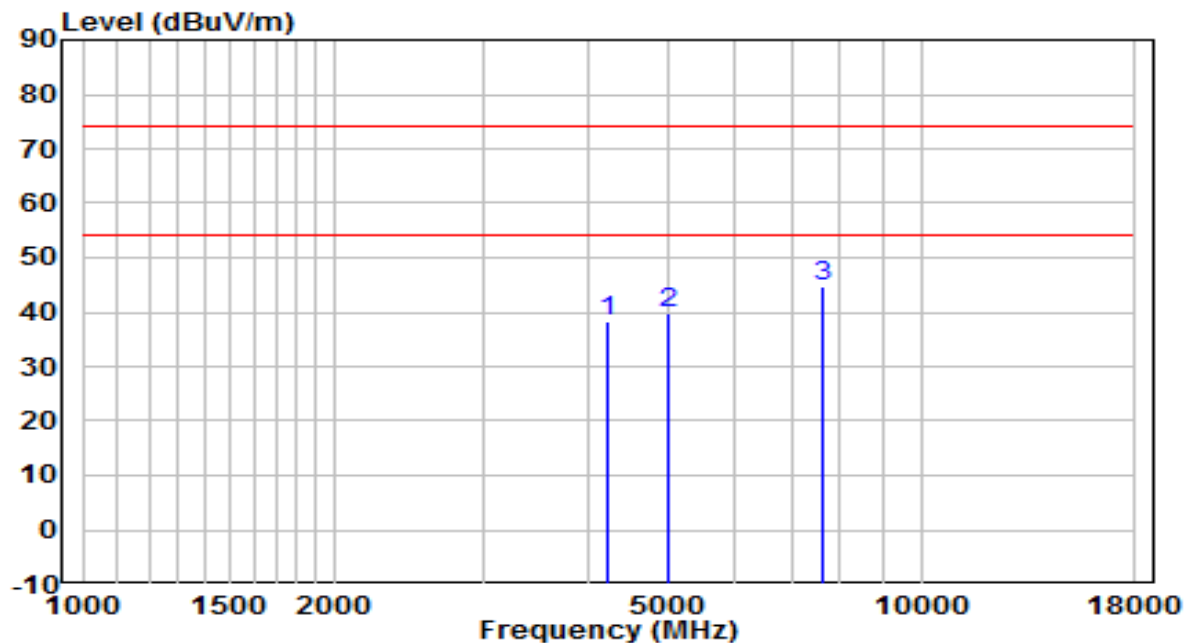


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4213.000        | 36.45          | 1.98       | 38.43                | -35.57      | 74.00          | Peak              |
| 2  | 4978.000        | 35.91          | 3.91       | 39.82                | -34.18      | 74.00          | Peak              |
| 3  | * 7647.000      | 31.44          | 13.14      | 44.58                | -29.42      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

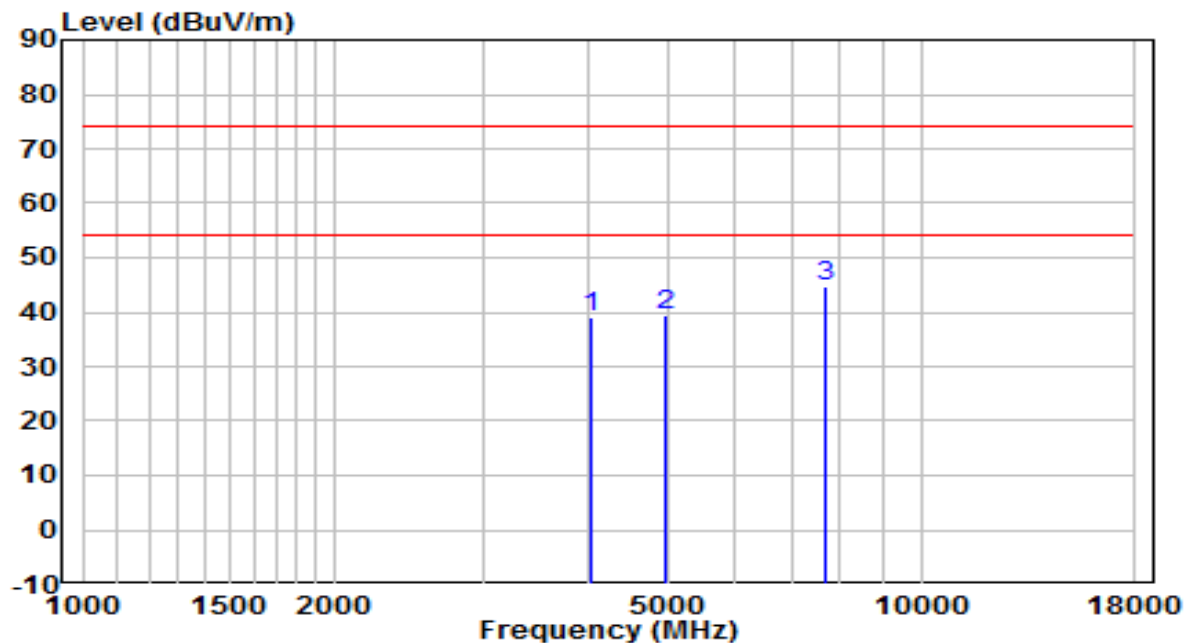


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4051.500        | 37.51          | 1.37       | 38.88                | -35.12      | 74.00          | Peak              |
| 2  | 4944.000        | 35.70          | 3.85       | 39.55                | -34.45      | 74.00          | Peak              |
| 3  | * 7672.500      | 31.67          | 13.16      | 44.83                | -29.17      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

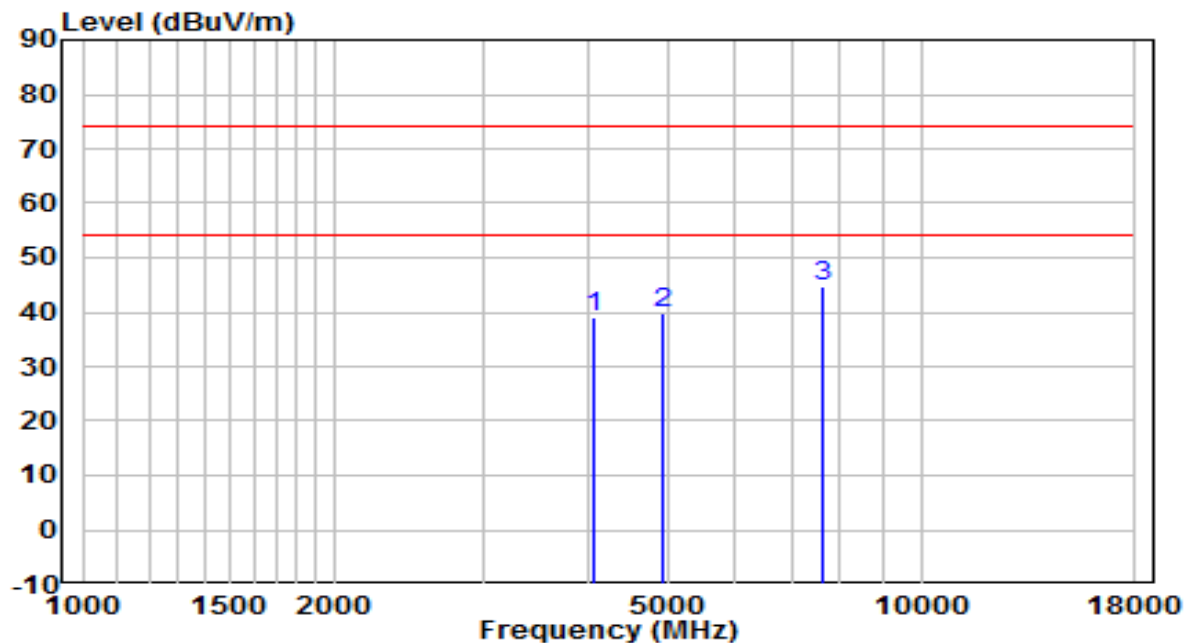


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4060.000        | 37.67          | 1.40       | 39.07                | -34.93      | 74.00          | Peak              |
| 2  | 4927.000        | 36.11          | 3.82       | 39.93                | -34.07      | 74.00          | Peak              |
| 3  | * 7638.500      | 31.77          | 13.13      | 44.90                | -29.10      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

### Filter Configuration 2#

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

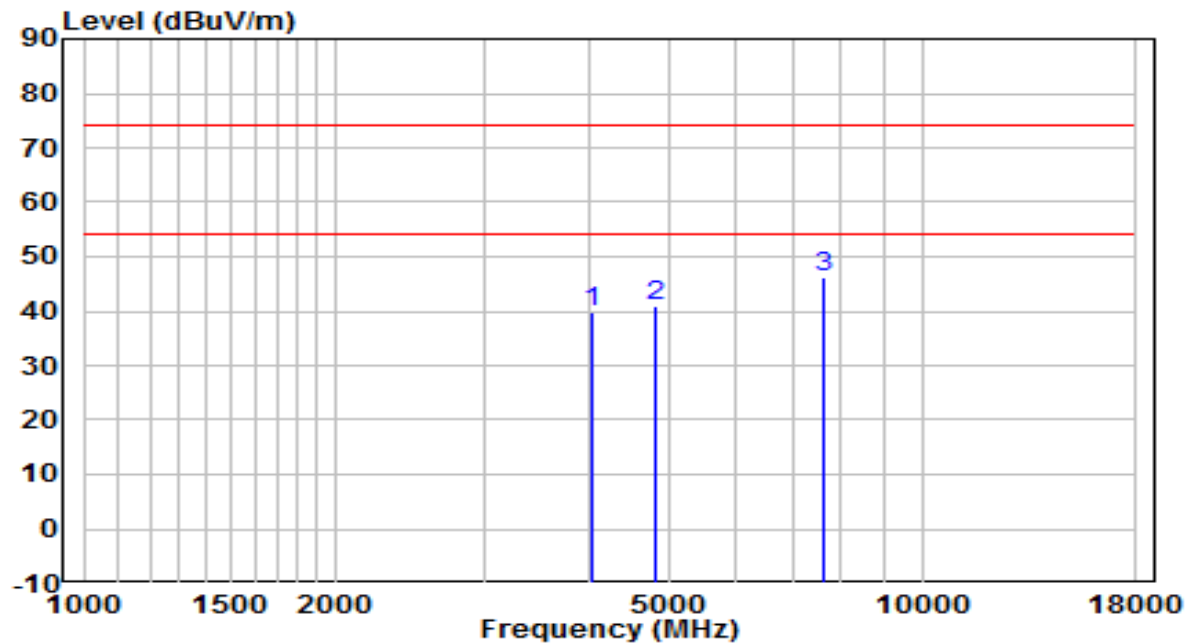


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4043.000        | 38.40          | 1.34       | 39.74                | -34.26      | 74.00          | Peak              |
| 2  | 4791.000        | 37.55          | 3.57       | 41.13                | -32.87      | 74.00          | Peak              |
| 3  | * 7655.500      | 33.21          | 13.14      | 46.36                | -27.64      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

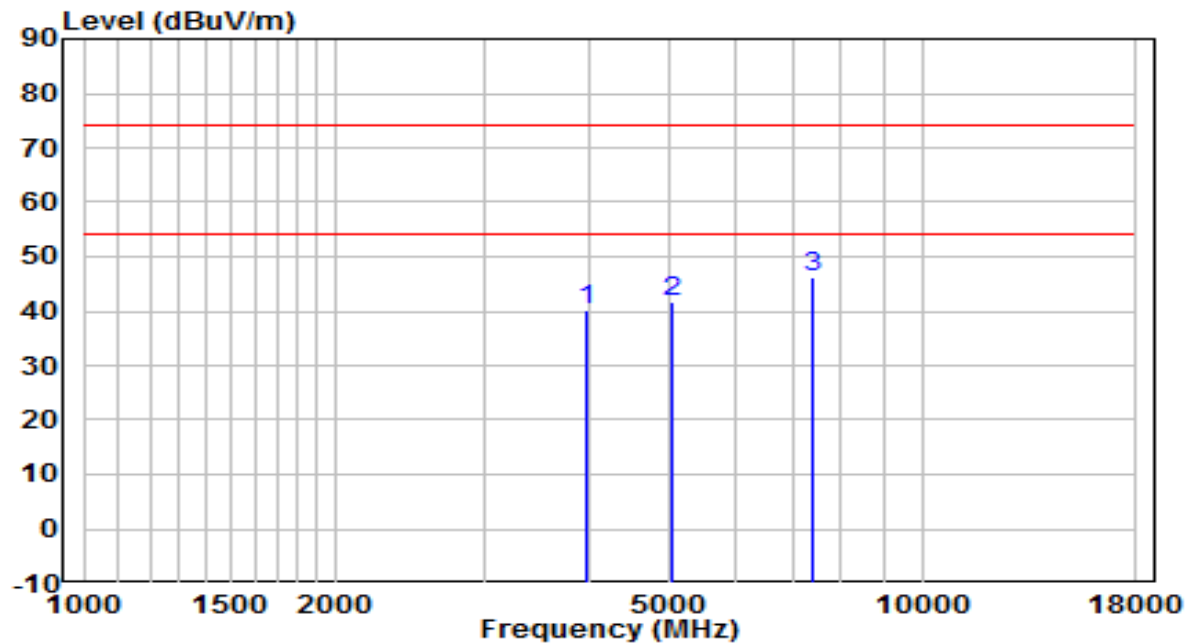


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3983.500        | 38.98          | 1.13       | 40.11                | -33.89      | 74.00          | Peak              |
| 2  | 5020.500        | 37.60          | 3.98       | 41.58                | -32.42      | 74.00          | Peak              |
| 3  | * 7400.500      | 33.78          | 12.57      | 46.36                | -27.64      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

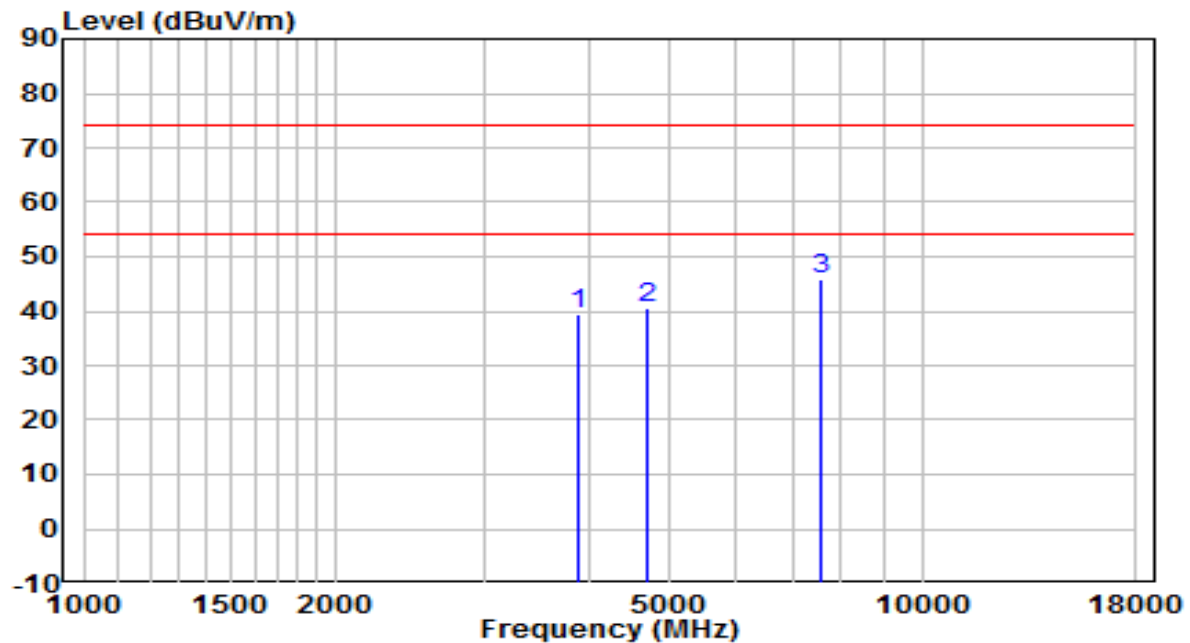


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3890.000        | 38.46          | 0.85       | 39.31                | -34.69      | 74.00          | Peak              |
| 2  | 4714.500        | 37.23          | 3.44       | 40.67                | -33.33      | 74.00          | Peak              |
| 3  | * 7553.500      | 32.76          | 13.06      | 45.82                | -28.18      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

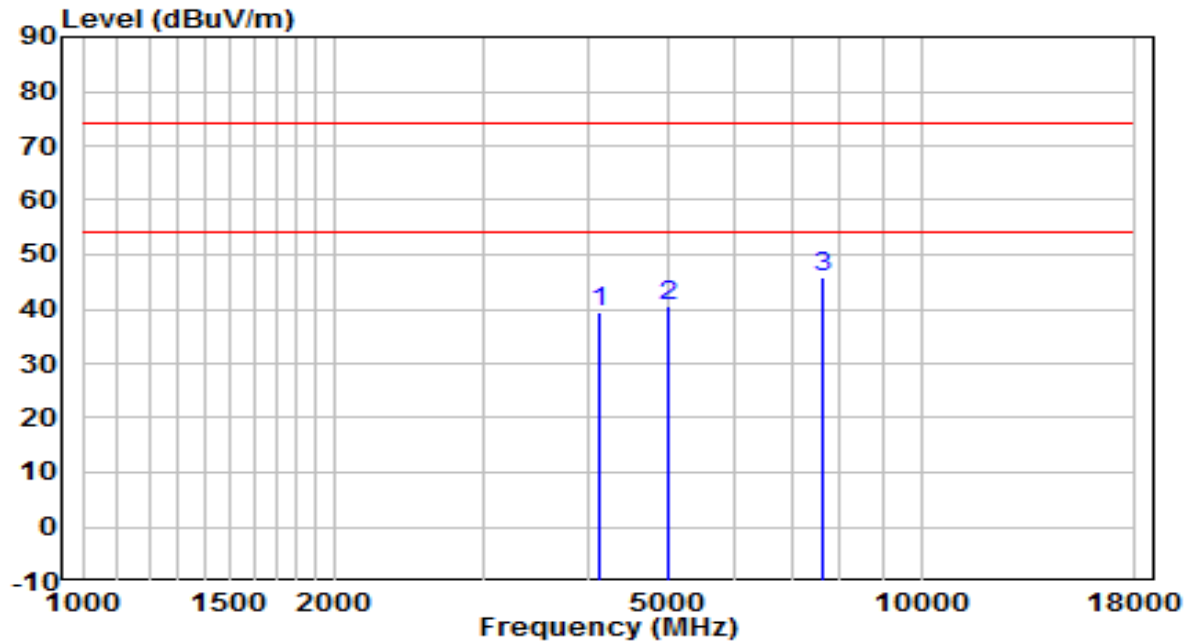


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4119.500        | 37.69          | 1.63       | 39.32                | -34.68      | 74.00          | Peak              |
| 2  | 4978.000        | 36.73          | 3.91       | 40.64                | -33.36      | 74.00          | Peak              |
| 3  | * 7613.000      | 32.83          | 13.11      | 45.94                | -28.06      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

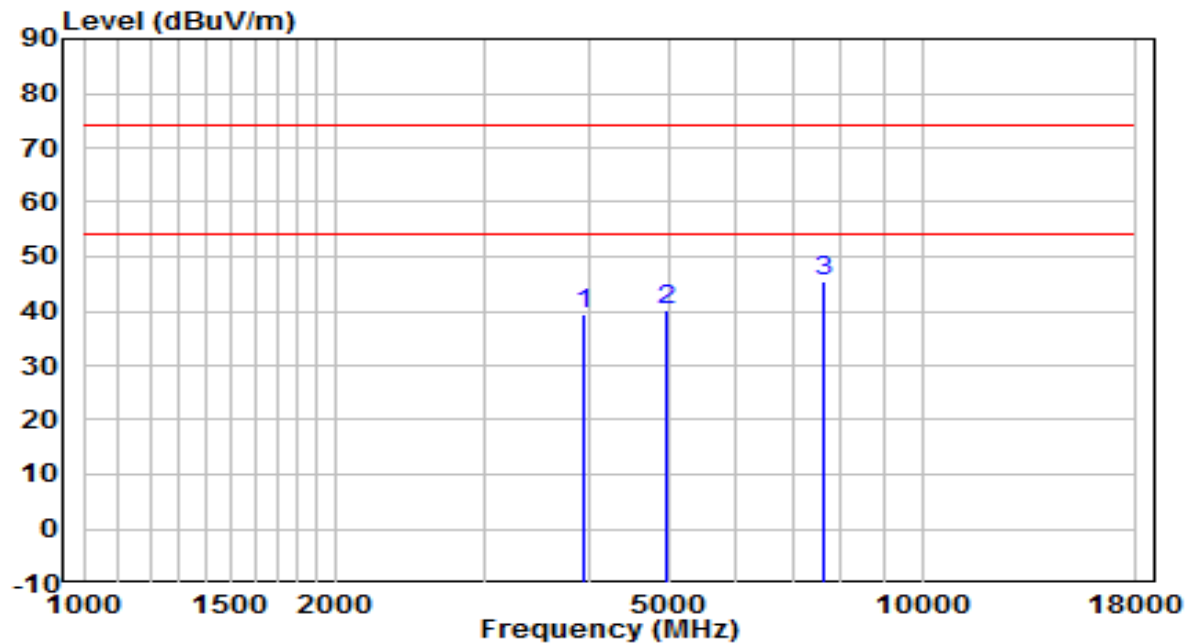


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3958.000        | 38.25          | 1.05       | 39.30                | -34.70      | 74.00          | Peak              |
| 2  | 4961.000        | 36.28          | 3.88       | 40.16                | -33.84      | 74.00          | Peak              |
| 3  | * 7613.000      | 32.50          | 13.11      | 45.61                | -28.39      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

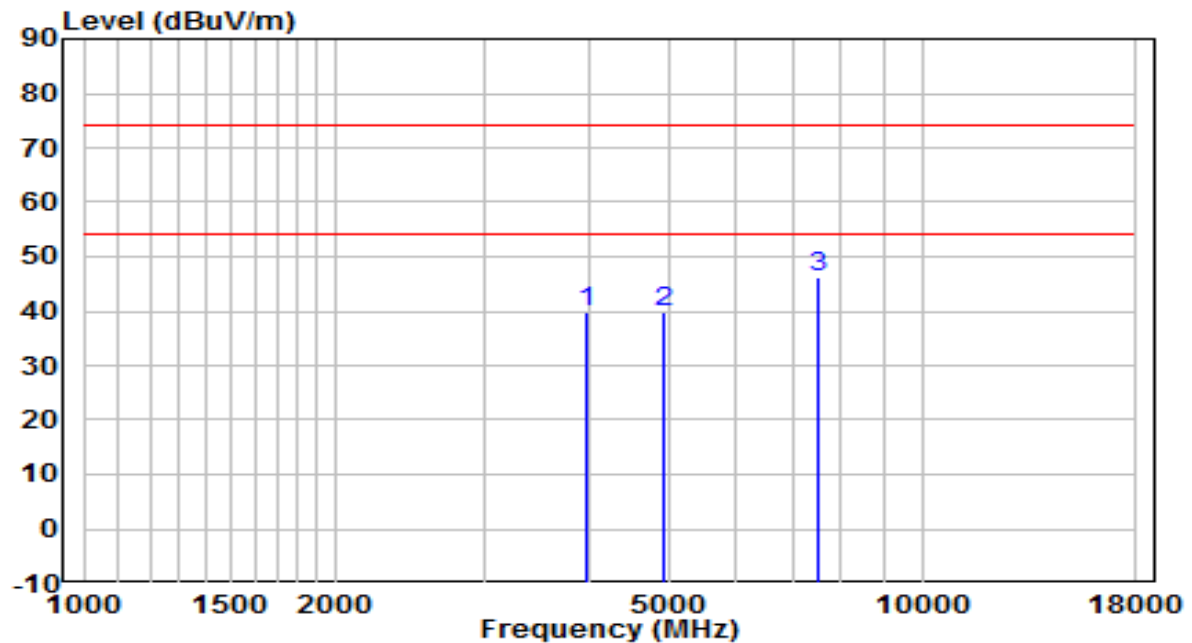


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3992.000        | 38.78          | 1.16       | 39.93                | -34.07      | 74.00          | Peak              |
| 2  | 4918.500        | 35.83          | 3.80       | 39.63                | -34.37      | 74.00          | Peak              |
| 3  | * 7511.000      | 33.04          | 13.02      | 46.06                | -27.94      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

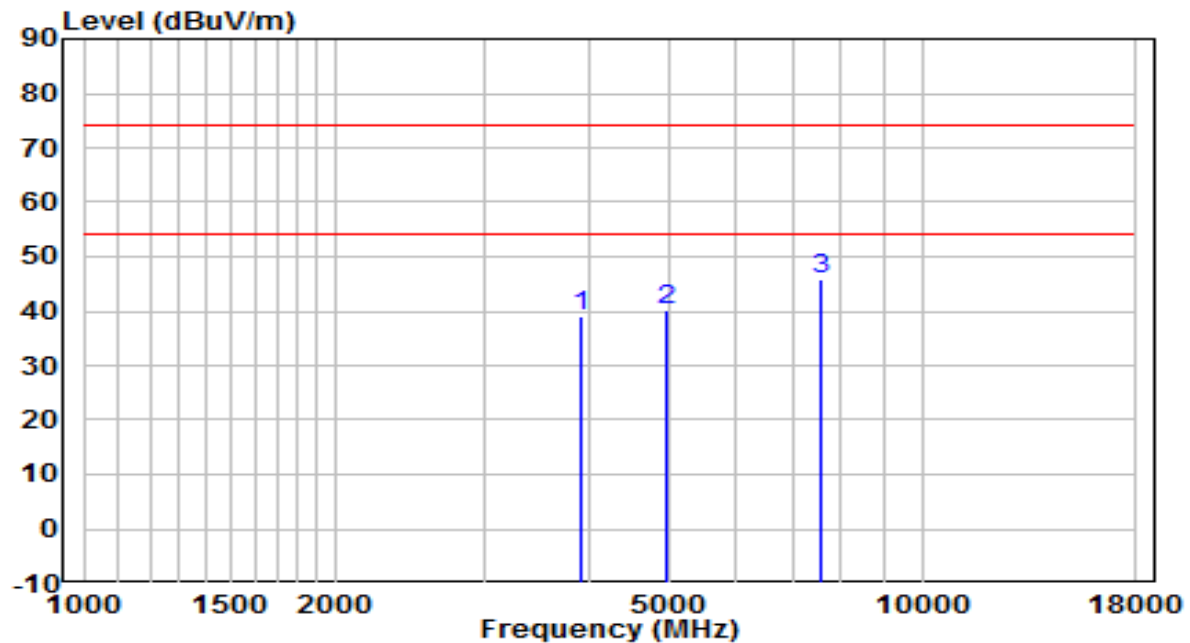


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3907.000        | 38.34          | 0.90       | 39.24                | -34.76      | 74.00          | Peak              |
| 2  | 4944.000        | 36.50          | 3.85       | 40.35                | -33.65      | 74.00          | Peak              |
| 3  | * 7587.500      | 32.61          | 13.09      | 45.70                | -28.30      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

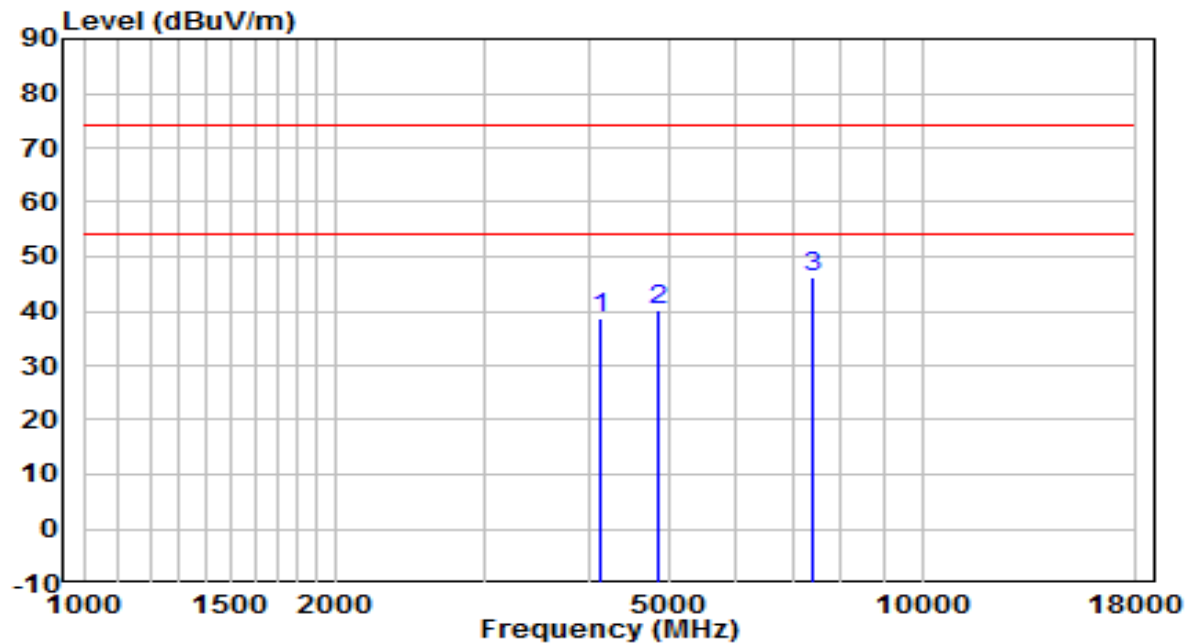


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4119.500        | 37.09          | 1.63       | 38.72                | -35.28      | 74.00          | Peak              |
| 2  | 4842.000        | 36.45          | 3.67       | 40.11                | -33.89      | 74.00          | Peak              |
| 3  | * 7383.500      | 33.72          | 12.50      | 46.22                | -27.78      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

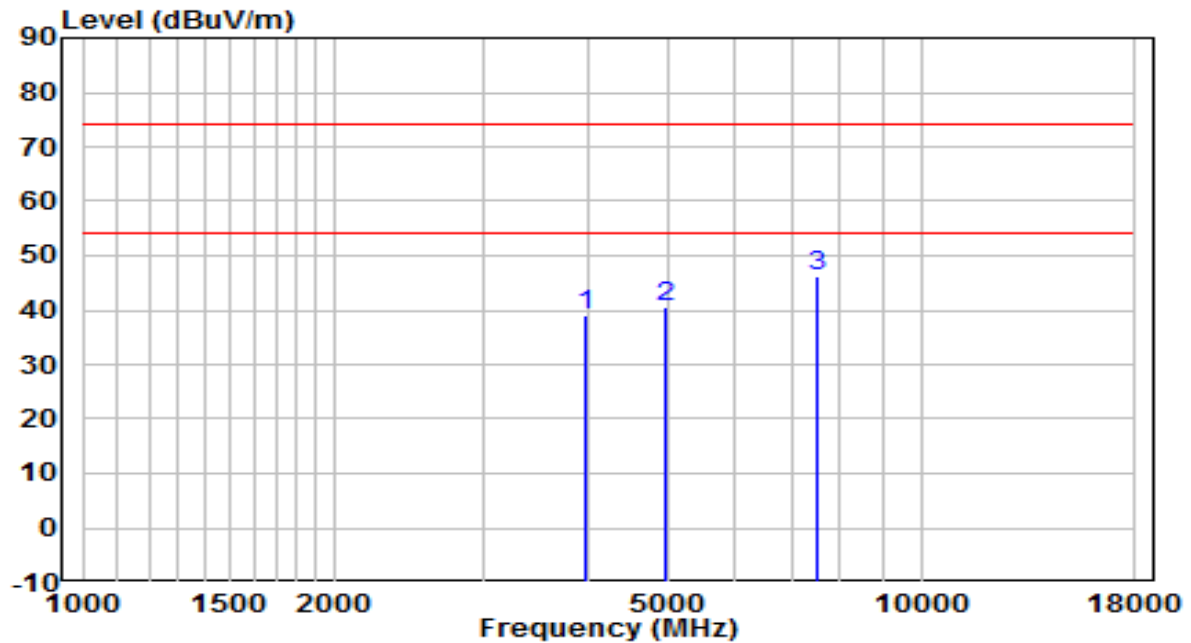


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3966.500        | 37.89          | 1.08       | 38.97                | -35.03      | 74.00          | Peak              |
| 2  | 4952.500        | 36.53          | 3.86       | 40.39                | -33.61      | 74.00          | Peak              |
| 3  | * 7519.500      | 33.22          | 13.03      | 46.25                | -27.75      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

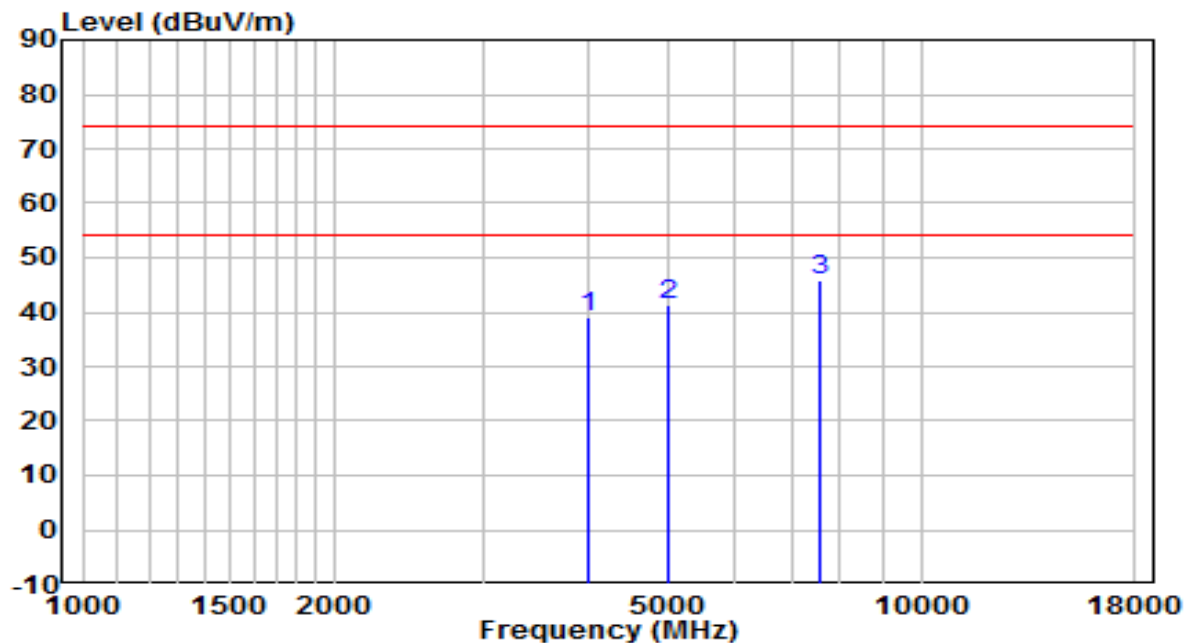


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4017.500        | 37.66          | 1.25       | 38.91                | -35.09      | 74.00          | Peak              |
| 2  | 5003.500        | 37.46          | 3.96       | 41.42                | -32.58      | 74.00          | Peak              |
| 3  | * 7570.500      | 32.67          | 13.07      | 45.74                | -28.26      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

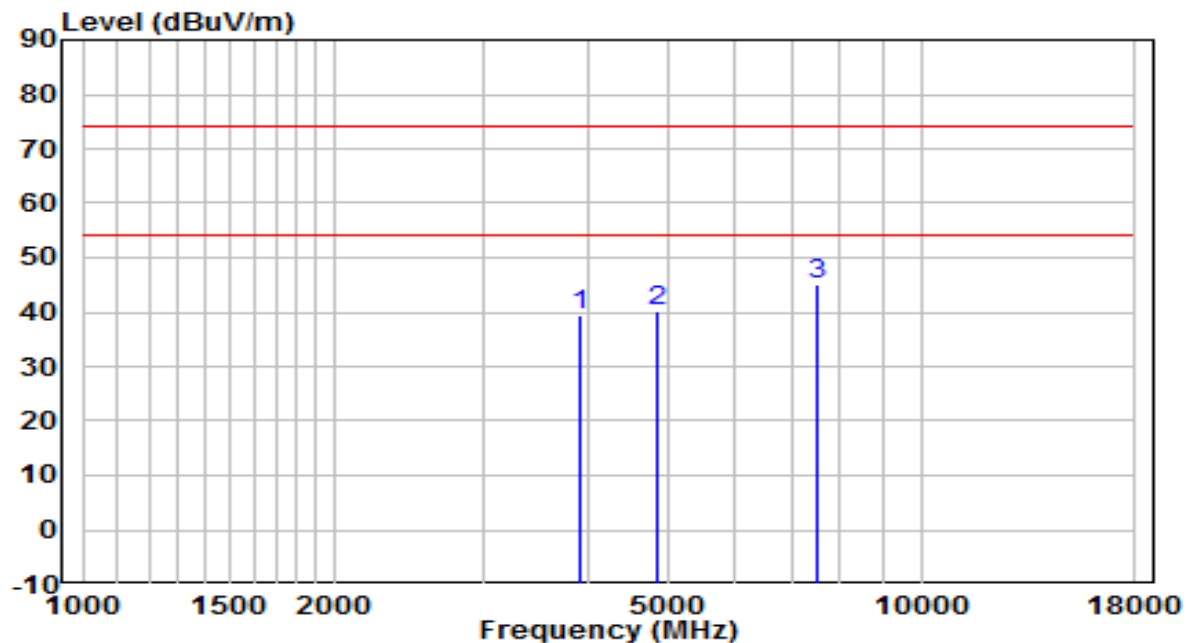


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3915.500        | 38.65          | 0.92       | 39.57                | -34.43      | 74.00          | Peak              |
| 2  | 4833.500        | 36.65          | 3.65       | 40.30                | -33.70      | 74.00          | Peak              |
| 3  | * 7502.500      | 32.20          | 13.02      | 45.21                | -28.79      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

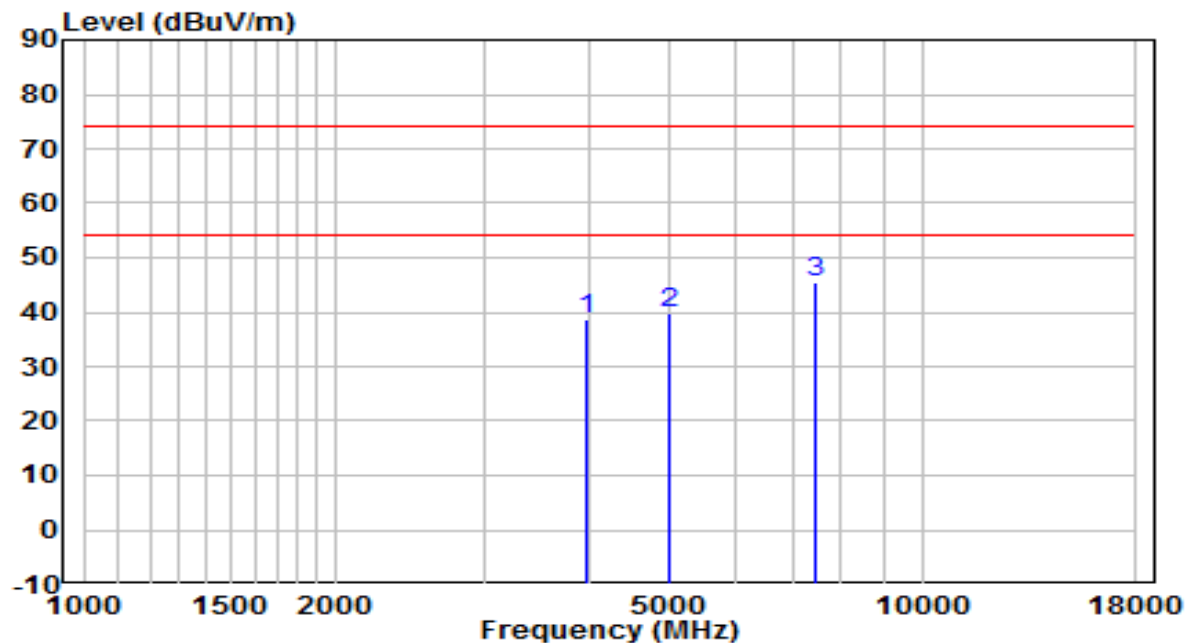


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3975.000        | 37.72          | 1.10       | 38.83                | -35.17      | 74.00          | Peak              |
| 2  | 5003.500        | 35.92          | 3.96       | 39.88                | -34.12      | 74.00          | Peak              |
| 3  | * 7434.500      | 32.62          | 12.72      | 45.34                | -28.66      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

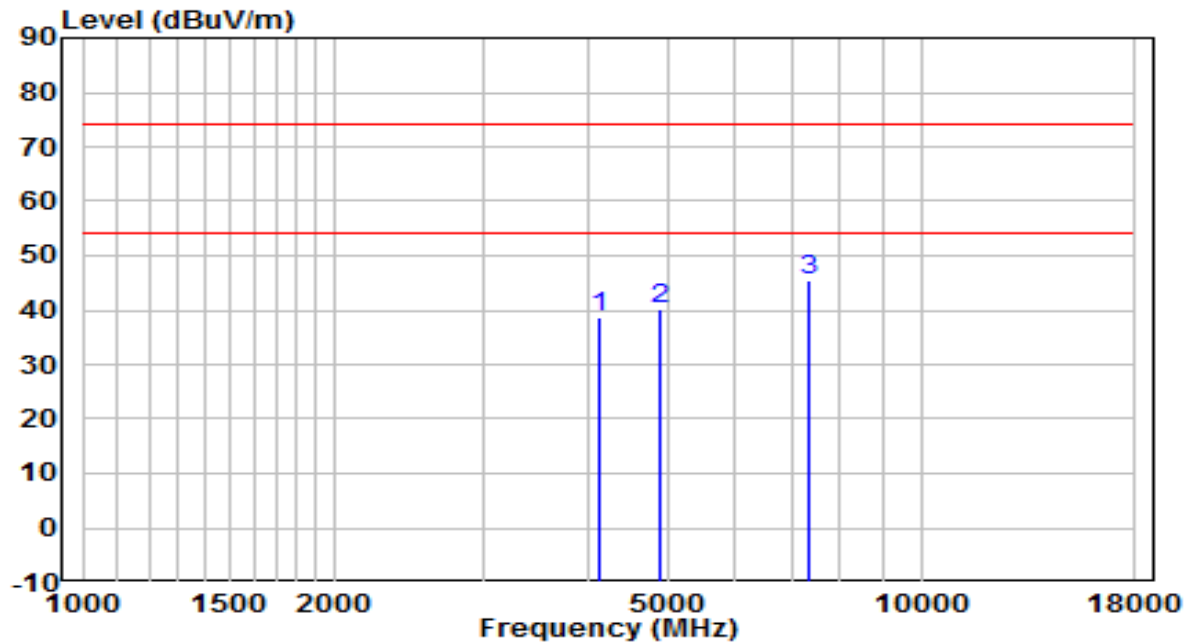


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4145.000        | 37.12          | 1.72       | 38.85                | -35.15      | 74.00          | Peak              |
| 2  | 4876.000        | 36.59          | 3.73       | 40.32                | -33.68      | 74.00          | Peak              |
| 3  | * 7324.000      | 33.39          | 12.24      | 45.63                | -28.37      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

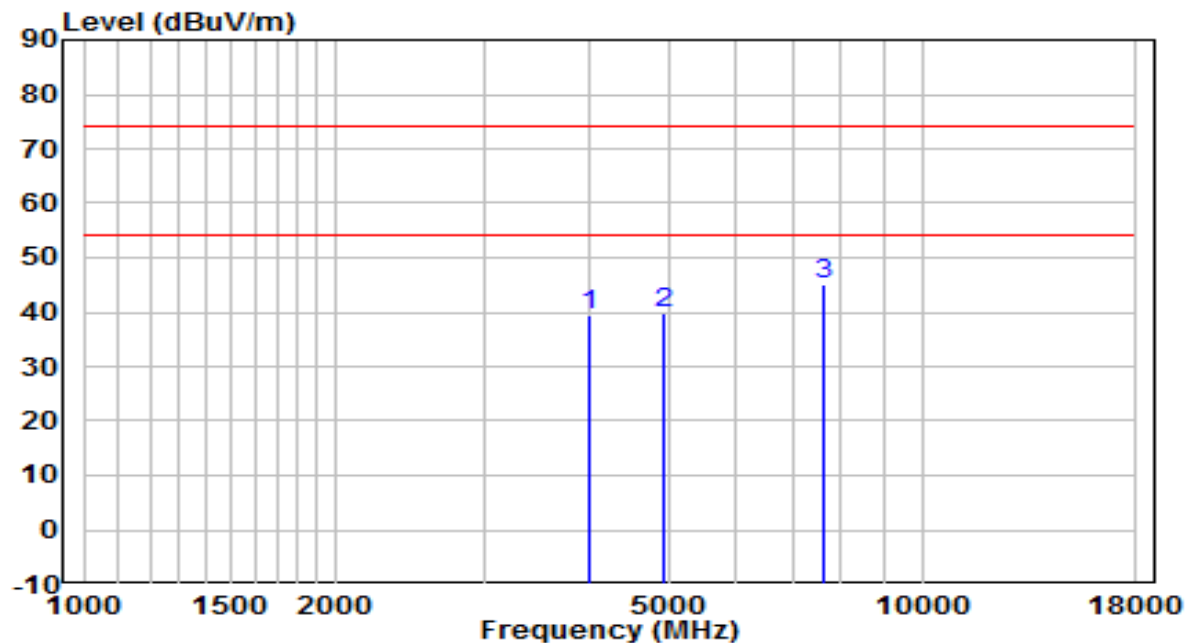


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4017.500        | 38.36          | 1.25       | 39.61                | -34.39      | 74.00          | Peak              |
| 2  | 4910.000        | 36.06          | 3.79       | 39.84                | -34.16      | 74.00          | Peak              |
| 3  | * 7638.500      | 31.99          | 13.13      | 45.12                | -28.88      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

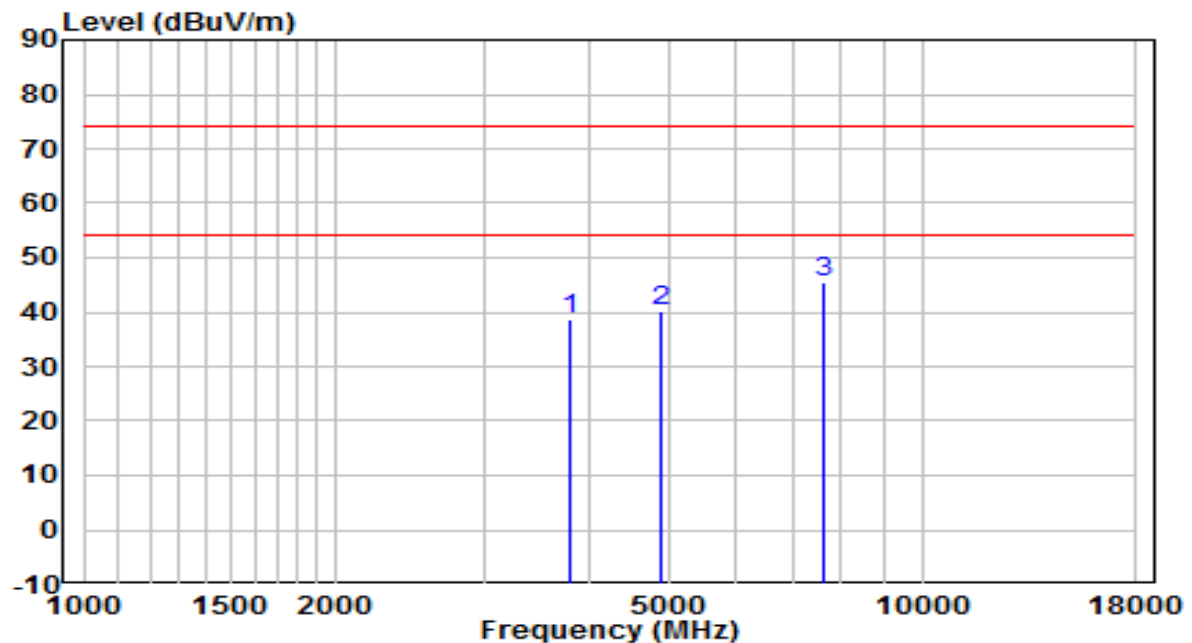


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3813.500        | 38.25          | 0.61       | 38.86                | -35.14      | 74.00          | Peak              |
| 2  | 4893.000        | 36.32          | 3.76       | 40.08                | -33.92      | 74.00          | Peak              |
| 3  | * 7621.500      | 32.51          | 13.12      | 45.63                | -28.37      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

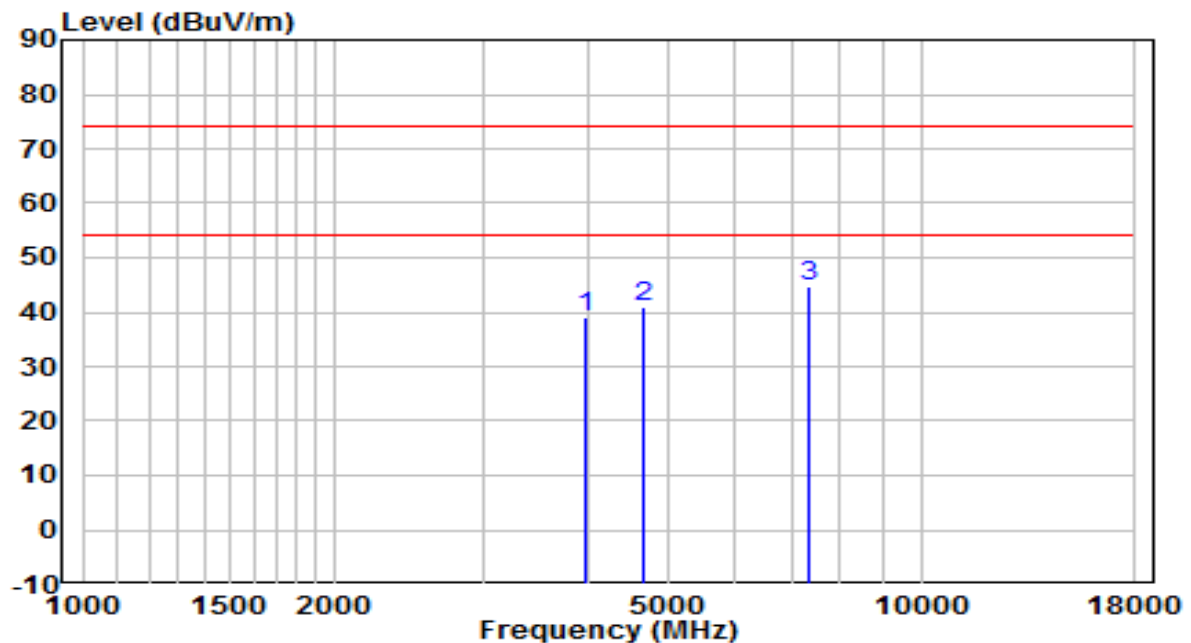


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3966.500        | 38.10          | 1.08       | 39.18                | -34.82      | 74.00          | Peak              |
| 2  | 4655.000        | 37.54          | 3.33       | 40.87                | -33.13      | 74.00          | Peak              |
| 3  | * 7324.000      | 32.55          | 12.24      | 44.79                | -29.21      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

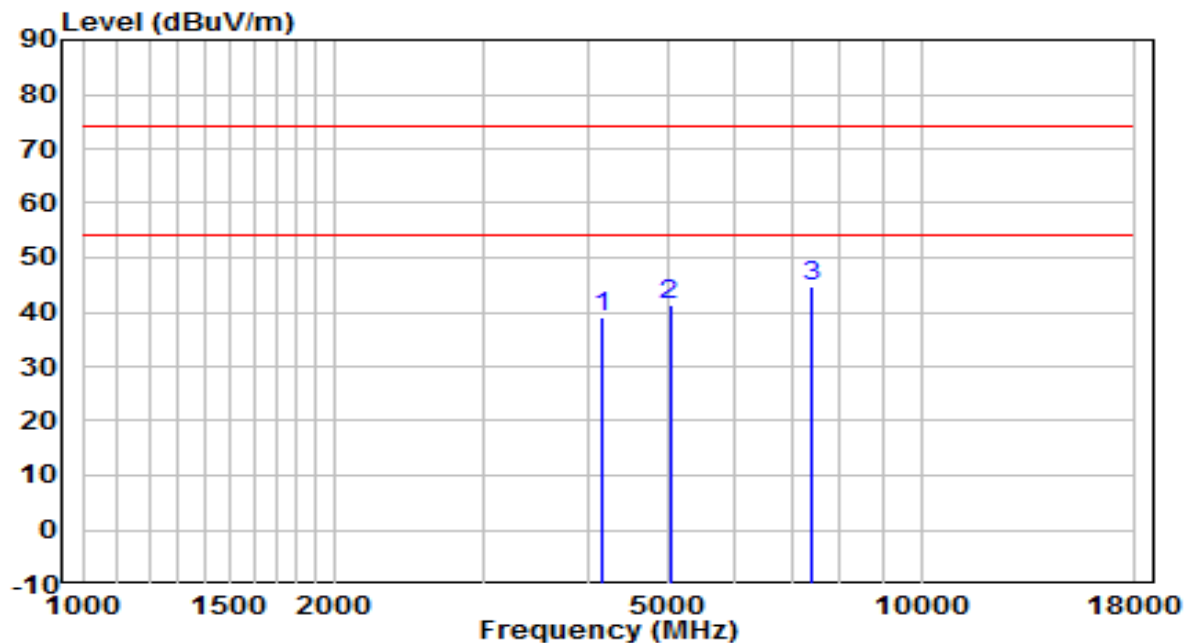


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4162.000        | 37.10          | 1.79       | 38.89                | -35.11      | 74.00          | Peak              |
| 2  | 5012.000        | 37.20          | 3.97       | 41.17                | -32.83      | 74.00          | Peak              |
| 3  | * 7383.500      | 32.34          | 12.50      | 44.84                | -29.16      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

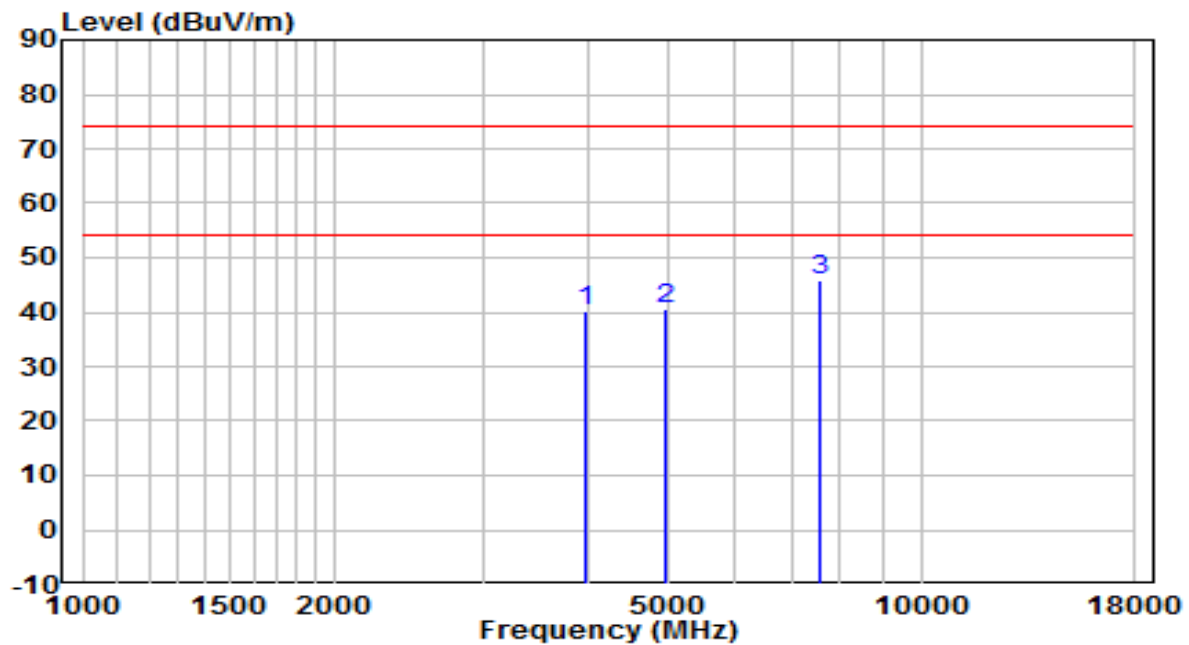


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3983.500        | 39.15          | 1.13       | 40.28                | -33.72      | 74.00          | Peak              |
| 2  | 4952.500        | 36.83          | 3.86       | 40.70                | -33.30      | 74.00          | Peak              |
| 3  | * 7570.500      | 32.73          | 13.07      | 45.80                | -28.20      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

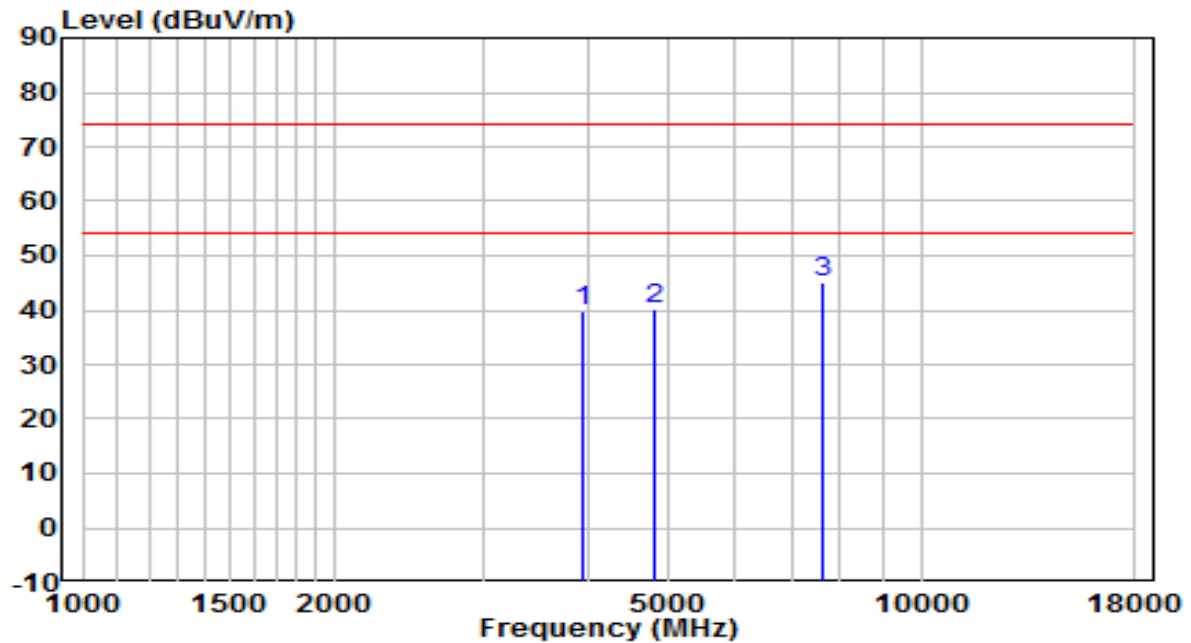


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3958.000        | 38.74          | 1.05       | 39.79                | -34.21      | 74.00          | Peak              |
| 2  | 4825.000        | 36.45          | 3.64       | 40.08                | -33.92      | 74.00          | Peak              |
| 3  | * 7638.500      | 31.97          | 13.13      | 45.10                | -28.90      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

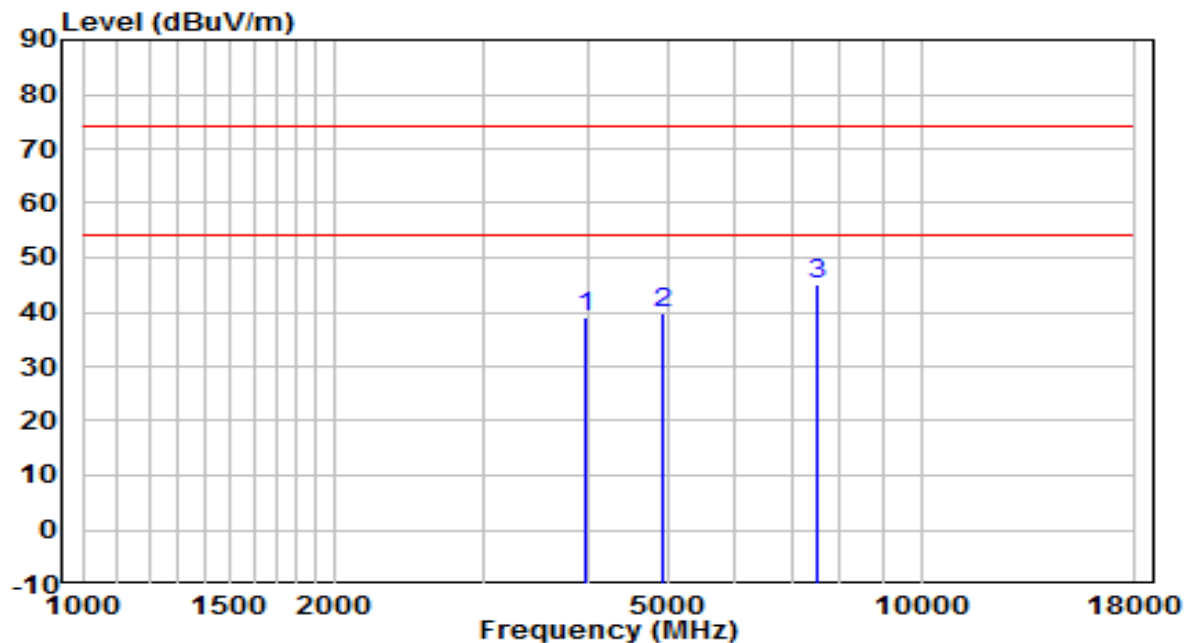


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3983.500        | 37.91          | 1.13       | 39.04                | -34.96      | 74.00          | Peak              |
| 2  | 4927.000        | 36.10          | 3.82       | 39.92                | -34.08      | 74.00          | Peak              |
| 3  | * 7528.000      | 32.12          | 13.04      | 45.15                | -28.85      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

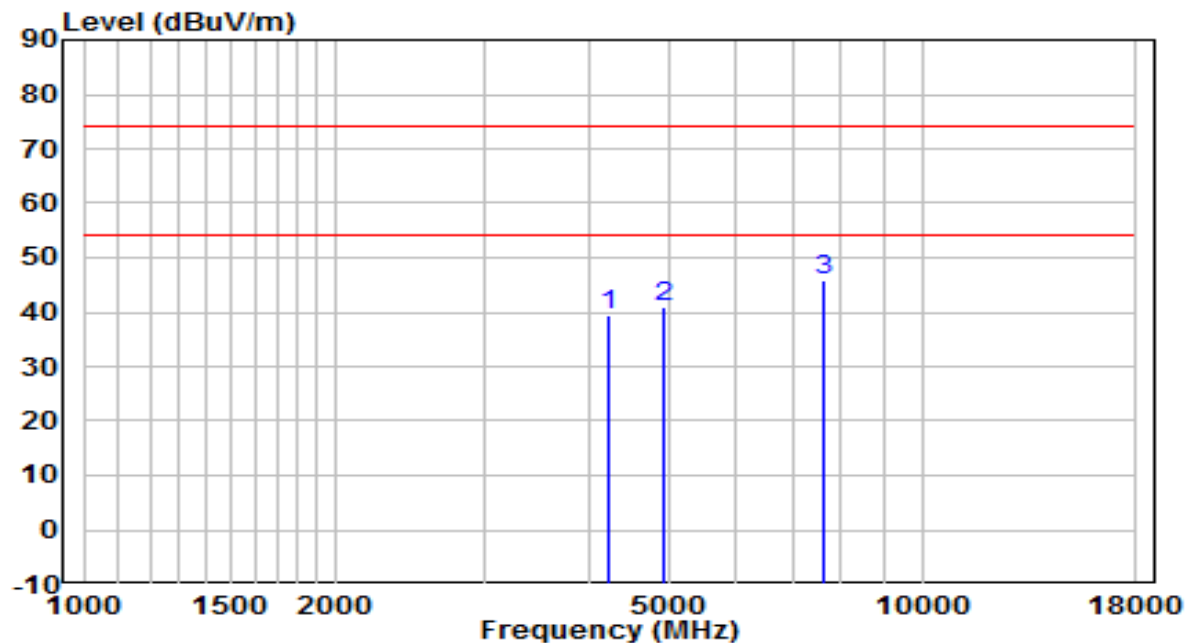


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4221.500        | 37.38          | 2.01       | 39.39                | -34.61      | 74.00          | Peak              |
| 2  | 4910.000        | 36.98          | 3.79       | 40.77                | -33.23      | 74.00          | Peak              |
| 3  | * 7621.500      | 32.64          | 13.12      | 45.76                | -28.24      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

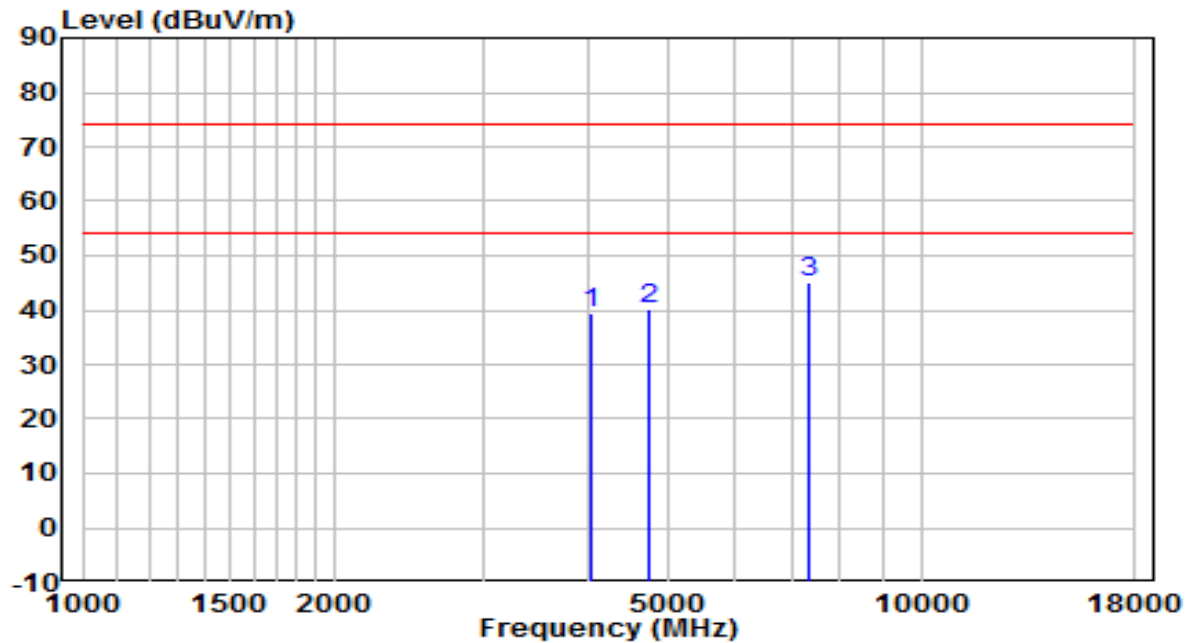


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4051.500        | 37.93          | 1.37       | 39.30                | -34.70      | 74.00          | Peak              |
| 2  | 4731.500        | 36.55          | 3.47       | 40.01                | -33.99      | 74.00          | Peak              |
| 3  | * 7366.500      | 32.77          | 12.42      | 45.19                | -28.81      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

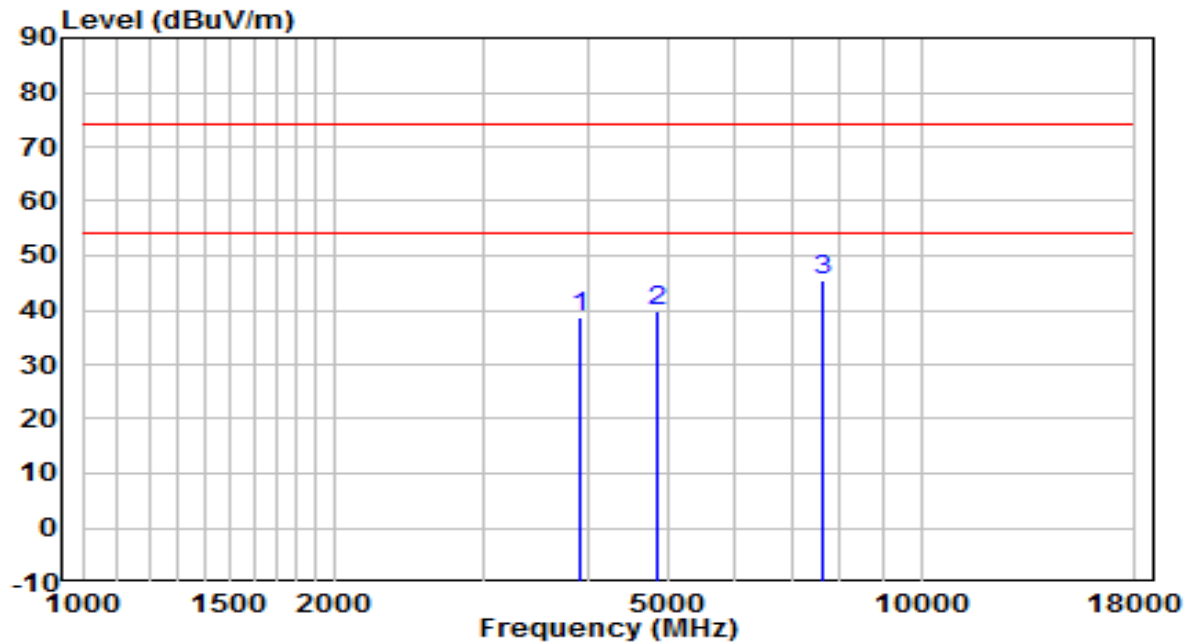


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3915.500        | 37.80          | 0.92       | 38.72                | -35.28      | 74.00          | Peak              |
| 2  | 4859.000        | 36.17          | 3.70       | 39.87                | -34.13      | 74.00          | Peak              |
| 3  | * 7638.500      | 32.16          | 13.13      | 45.29                | -28.71      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

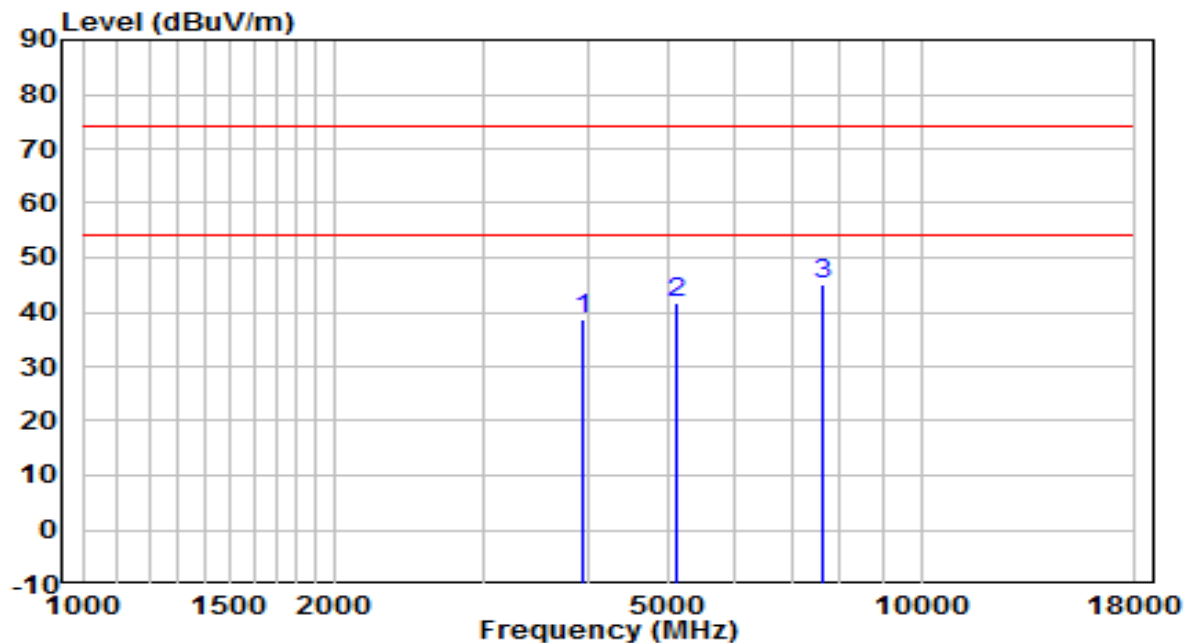


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3949.500        | 37.80          | 1.03       | 38.83                | -35.17      | 74.00          | Peak              |
| 2  | 5097.000        | 37.46          | 4.11       | 41.56                | -32.44      | 74.00          | Peak              |
| 3  | * 7647.000      | 31.80          | 13.14      | 44.93                | -29.07      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

### Filter Configuration 3#

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

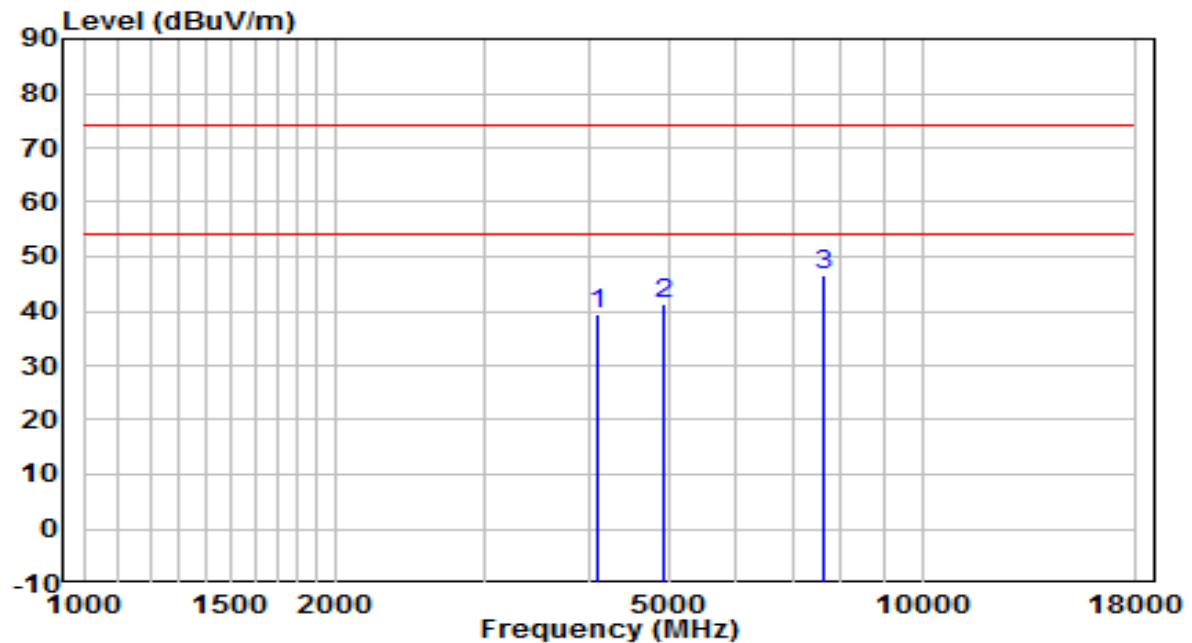


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4111.000        | 37.71          | 1.60       | 39.31                | -34.69      | 74.00          | Peak              |
| 2  | 4935.500        | 37.40          | 3.83       | 41.24                | -32.76      | 74.00          | Peak              |
| 3  | * 7638.500      | 33.57          | 13.13      | 46.70                | -27.30      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

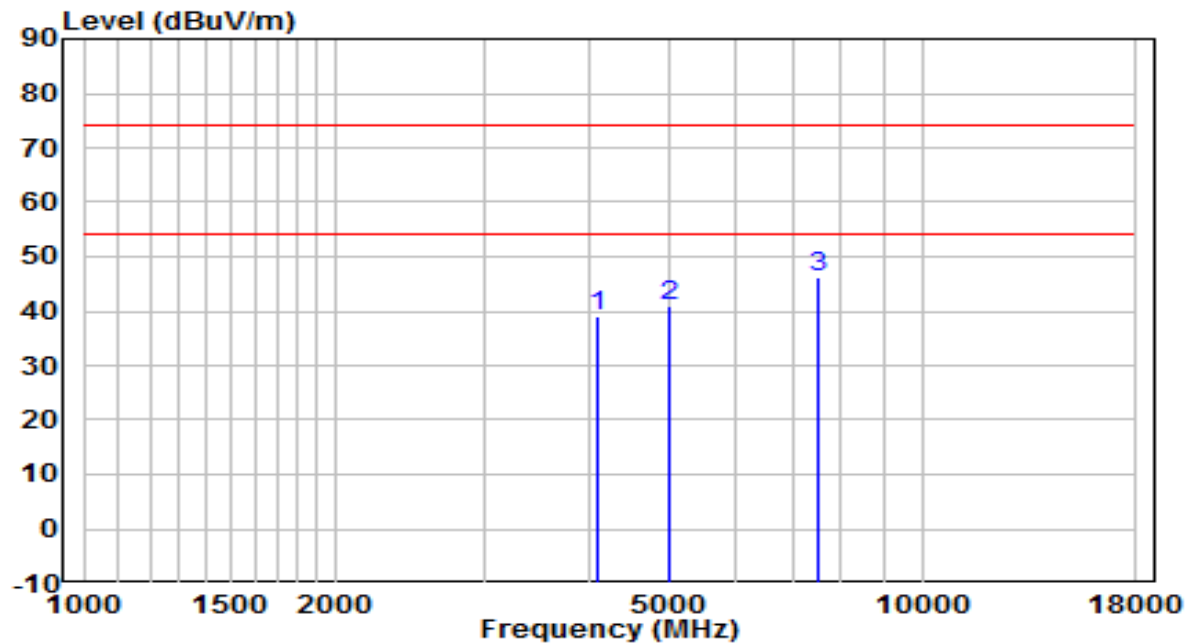


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4111.000        | 37.63          | 1.60       | 39.23                | -34.77      | 74.00          | Peak              |
| 2  | 5003.500        | 37.07          | 3.96       | 41.03                | -32.97      | 74.00          | Peak              |
| 3  | * 7536.500      | 33.07          | 13.05      | 46.12                | -27.88      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

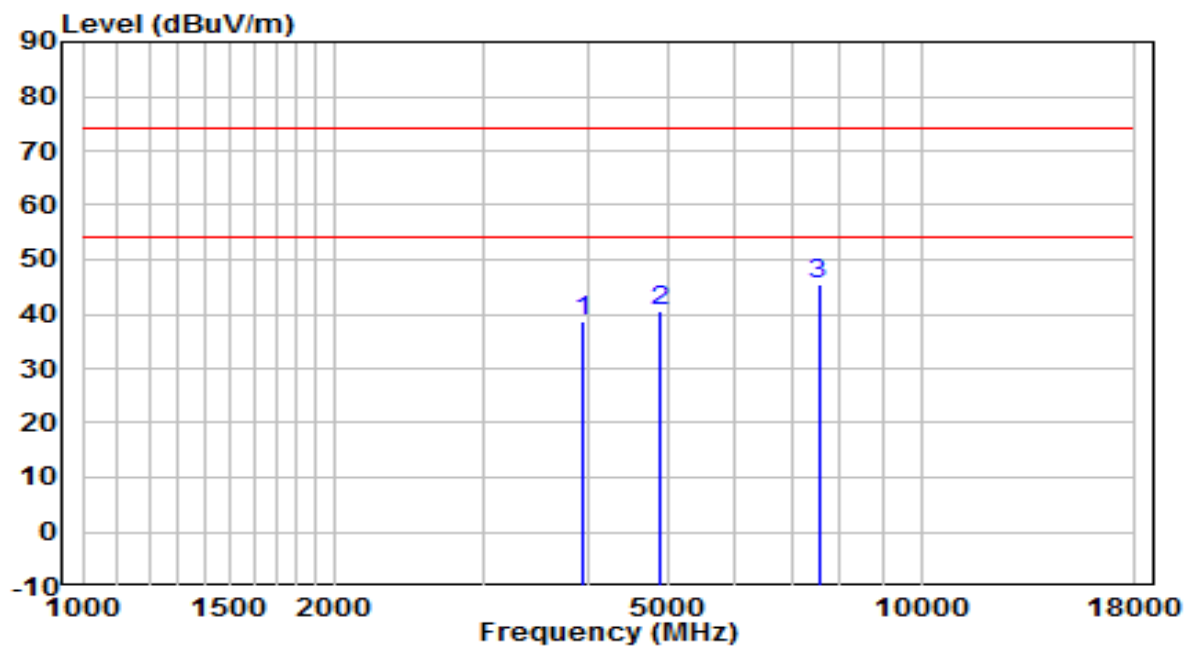


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 3949.500        | 37.74          | 1.03       | 38.76                | -35.24      | 74.00          | Peak              |
| 2  | 4884.500        | 36.77          | 3.74       | 40.51                | -33.49      | 74.00          | Peak              |
| 3  | * 7545.000      | 32.47          | 13.05      | 45.52                | -28.48      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

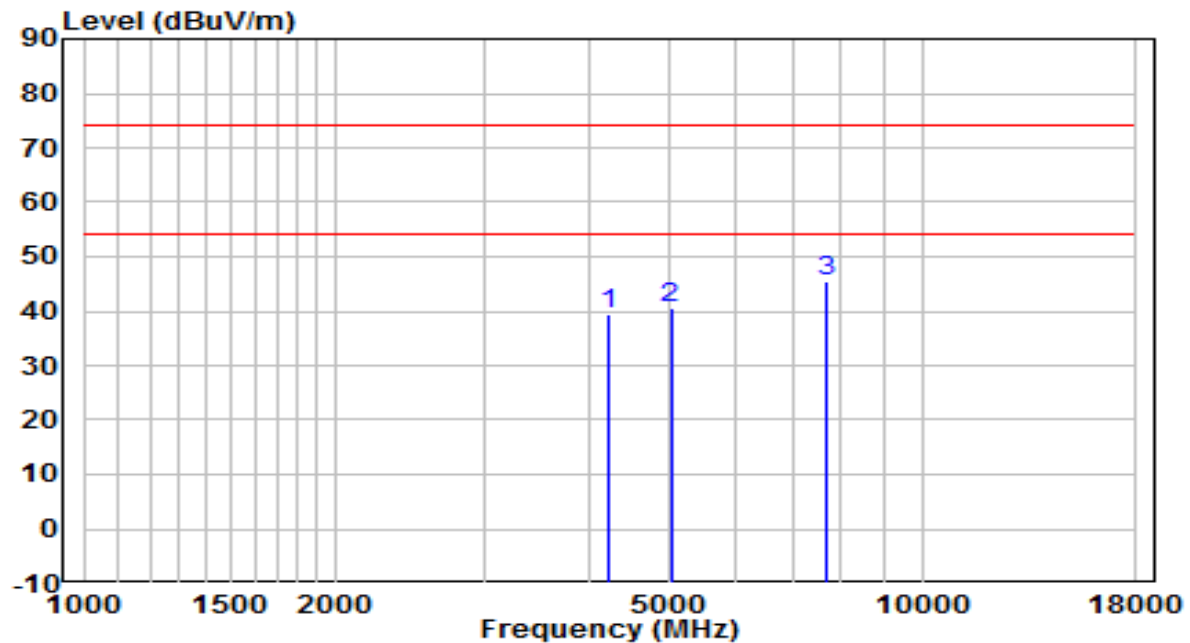


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4213.000        | 37.46          | 1.98       | 39.44                | -34.56      | 74.00          | Peak              |
| 2  | 5012.000        | 36.60          | 3.97       | 40.57                | -33.43      | 74.00          | Peak              |
| 3  | * 7672.500      | 32.16          | 13.16      | 45.32                | -28.68      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

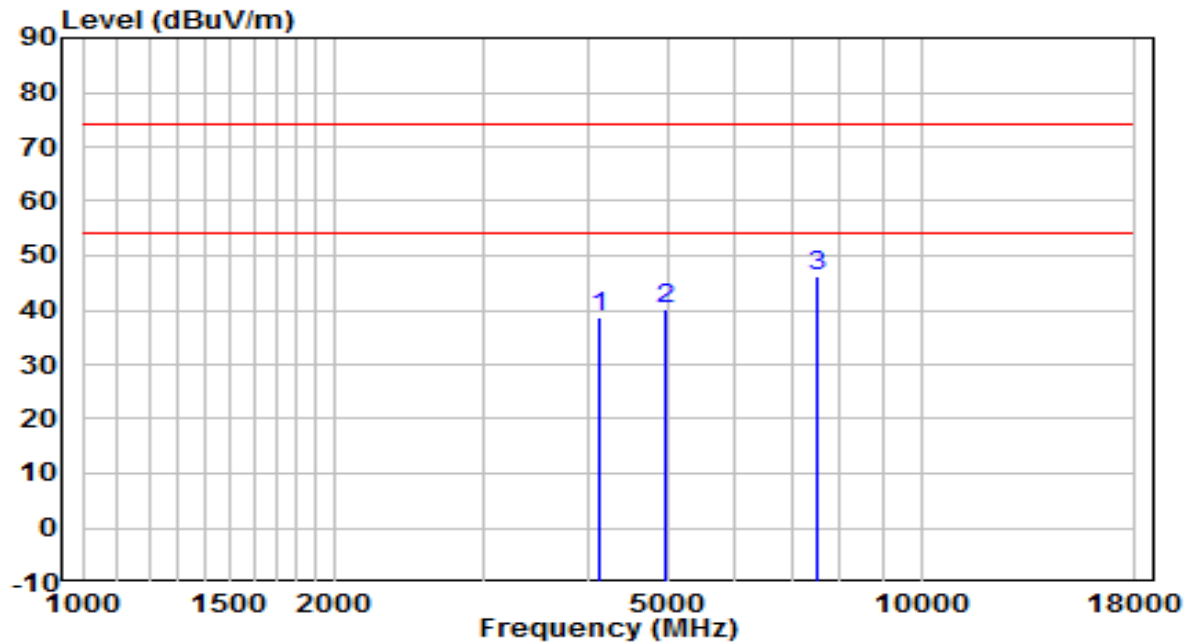


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4128.000        | 36.91          | 1.66       | 38.57                | -35.43      | 74.00          | Peak              |
| 2  | 4944.000        | 36.44          | 3.85       | 40.29                | -33.71      | 74.00          | Peak              |
| 3  | * 7494.000      | 33.10          | 12.99      | 46.09                | -27.91      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

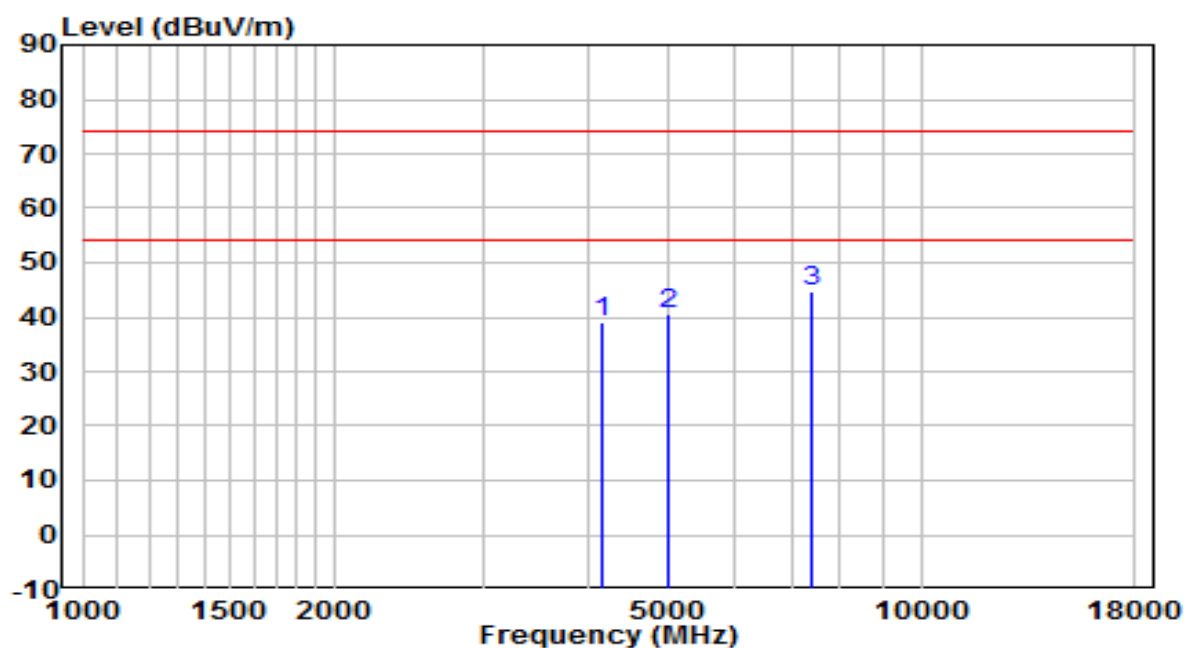


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4162.000        | 37.10          | 1.79       | 38.89                | -35.11      | 74.00          | Peak              |
| 2  | 4978.000        | 36.65          | 3.91       | 40.56                | -33.44      | 74.00          | Peak              |
| 3  | * 7400.500      | 32.33          | 12.57      | 44.90                | -29.10      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

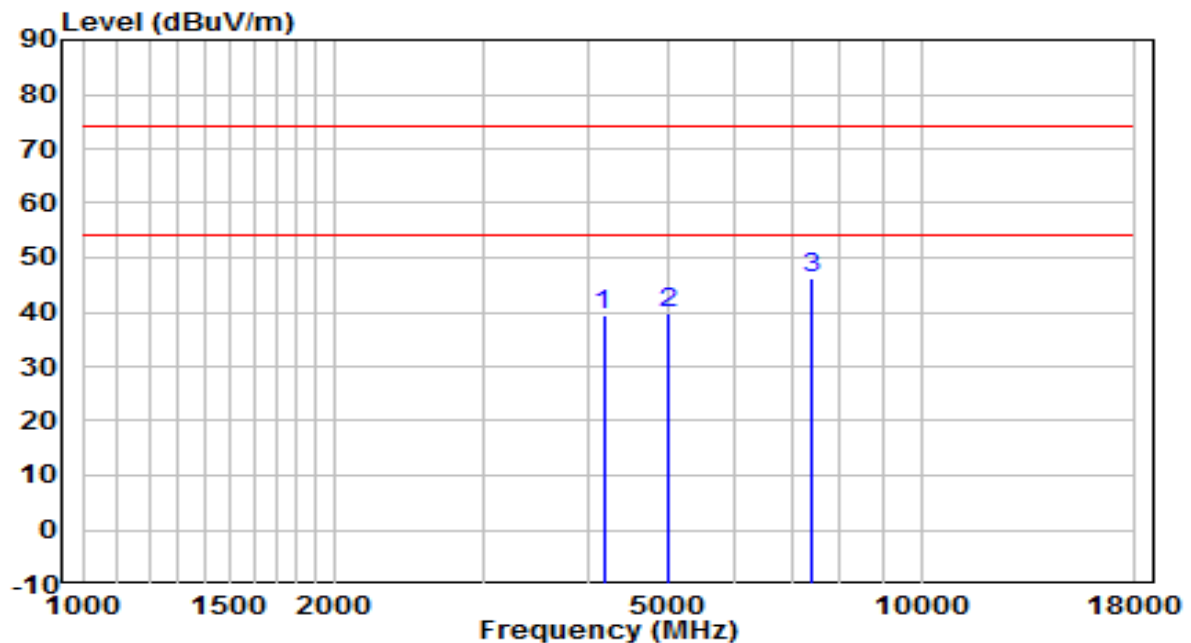


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4179.000        | 37.71          | 1.85       | 39.56                | -34.44      | 74.00          | Peak              |
| 2  | 4978.000        | 35.94          | 3.91       | 39.85                | -34.15      | 74.00          | Peak              |
| 3  | * 7392.000      | 33.85          | 12.54      | 46.39                | -27.61      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

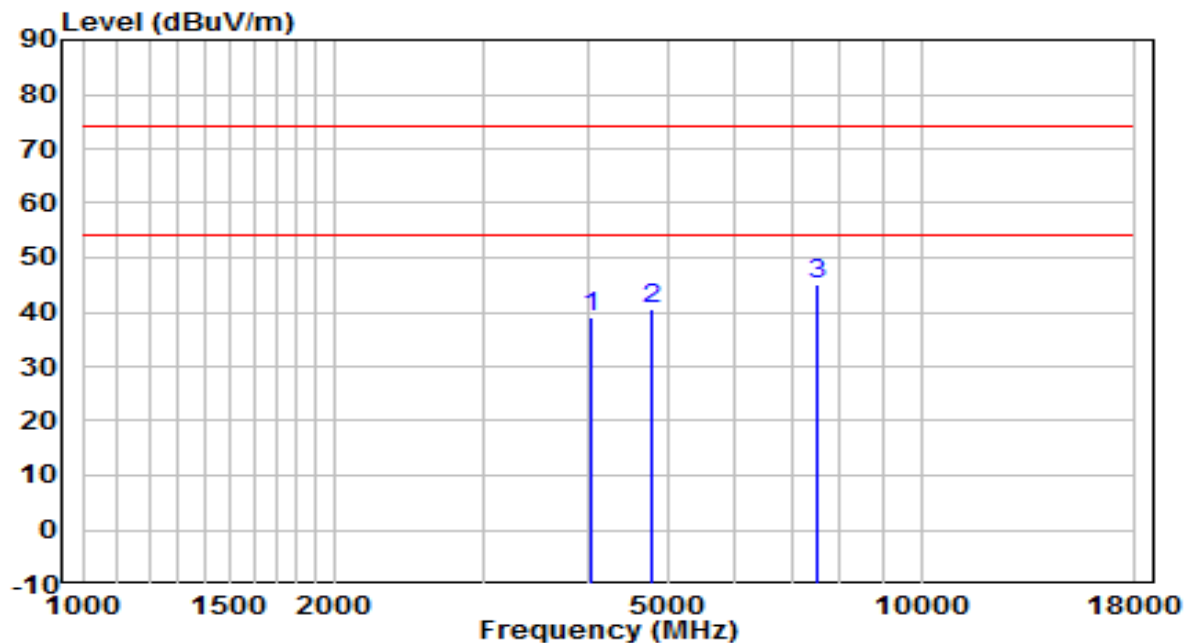


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4026.000        | 37.84          | 1.28       | 39.12                | -34.88      | 74.00          | Peak              |
| 2  | 4757.000        | 36.90          | 3.51       | 40.42                | -33.58      | 74.00          | Peak              |
| 3  | * 7519.500      | 31.95          | 13.03      | 44.98                | -29.02      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

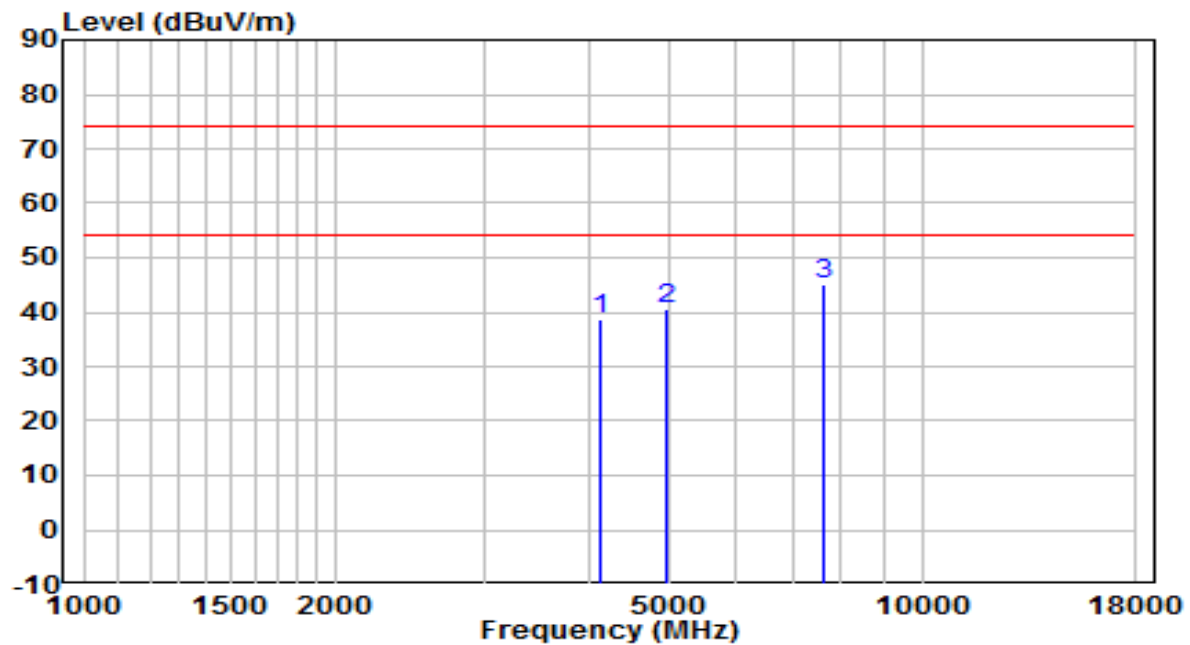


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4119.500        | 37.00          | 1.63       | 38.62                | -35.38      | 74.00          | Peak              |
| 2  | 4952.500        | 36.65          | 3.86       | 40.52                | -33.48      | 74.00          | Peak              |
| 3  | * 7630.000      | 32.07          | 13.12      | 45.19                | -28.81      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

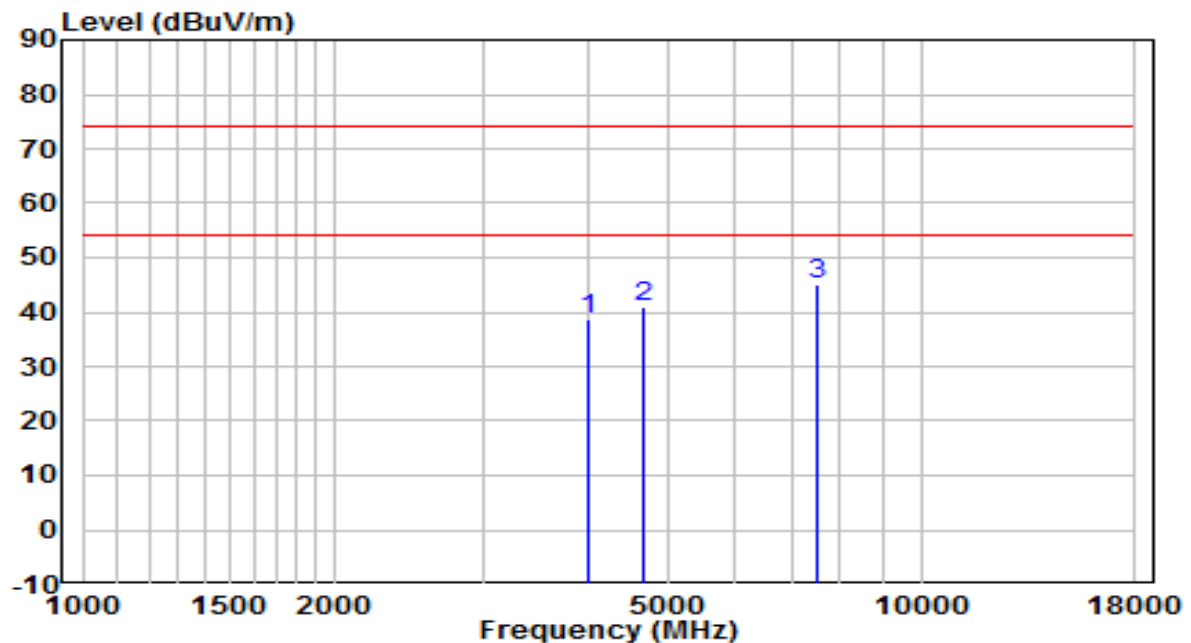


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4017.500        | 37.57          | 1.25       | 38.81                | -35.19      | 74.00          | Peak              |
| 2  | 4672.000        | 37.67          | 3.36       | 41.03                | -32.97      | 74.00          | Peak              |
| 3  | * 7519.500      | 32.12          | 13.03      | 45.15                | -28.85      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

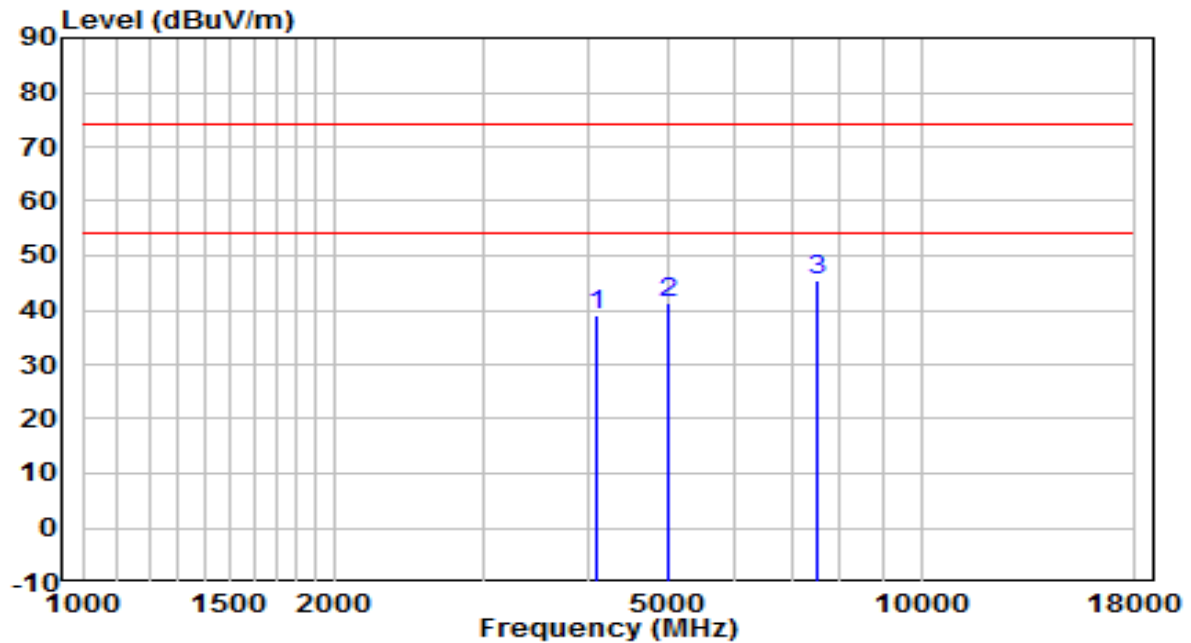


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4094.000        | 37.38          | 1.53       | 38.91                | -35.09      | 74.00          | Peak              |
| 2  | 5003.500        | 37.35          | 3.96       | 41.31                | -32.69      | 74.00          | Peak              |
| 3  | * 7511.000      | 32.52          | 13.02      | 45.54                | -28.46      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 26.7°C/52.5%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

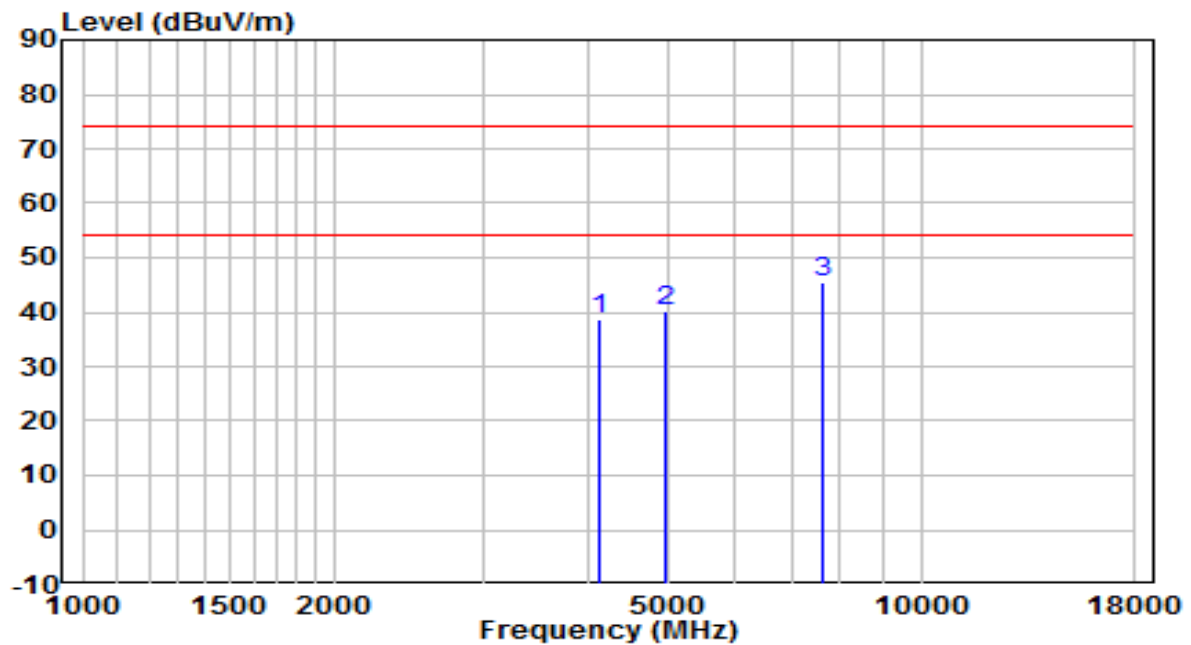


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 4145.000        | 37.04          | 1.72       | 38.76                | -35.24      | 74.00          | Peak              |
| 2  | 4969.500        | 36.15          | 3.90       | 40.04                | -33.96      | 74.00          | Peak              |
| 3  | * 7630.000      | 32.22          | 13.12      | 45.35                | -28.65      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

### The Result of Radiated Emission below 1GHz:

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-03-22    |
| Factor    | FMZB 1519B (9KHz~30MHz)_2021           | Temp. / Humidity     | 24.3°C /44.5% |
| Polarity  | face on                                | Site / Test Engineer | AC1 / Jay     |
| Test Mode | Transmit by 802.11b at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

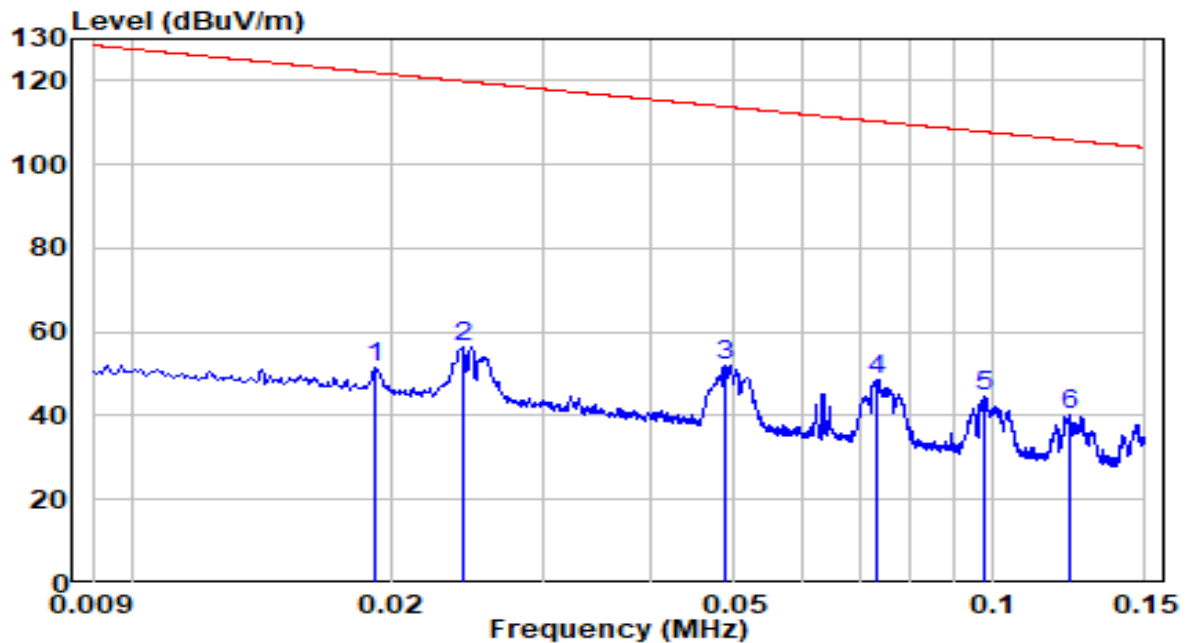


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 0.019           | 32.84          | 18.47      | 51.31                | -70.67      | 121.98         | Peak              |
| 2  | 0.024           | 37.67          | 18.96      | 56.63                | -63.27      | 119.90         | Peak              |
| 3  | * 0.049         | 32.78          | 19.42      | 52.20                | -61.60      | 113.79         | Peak              |
| 4  | 0.073           | 29.72          | 18.89      | 48.61                | -61.66      | 110.28         | Peak              |
| 5  | 0.098           | 26.30          | 18.36      | 44.66                | -63.14      | 107.80         | Peak              |
| 6  | 0.123           | 22.08          | 18.38      | 40.46                | -65.38      | 105.83         | Peak              |

#### Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-03-22    |
| Factor    | FMZB 1519B (9KHz~30MHz)_2021           | Temp. / Humidity     | 24.3°C /44.5% |
| Polarity  | face off                               | Site / Test Engineer | AC1 / Jay     |
| Test Mode | Transmit by 802.11b at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

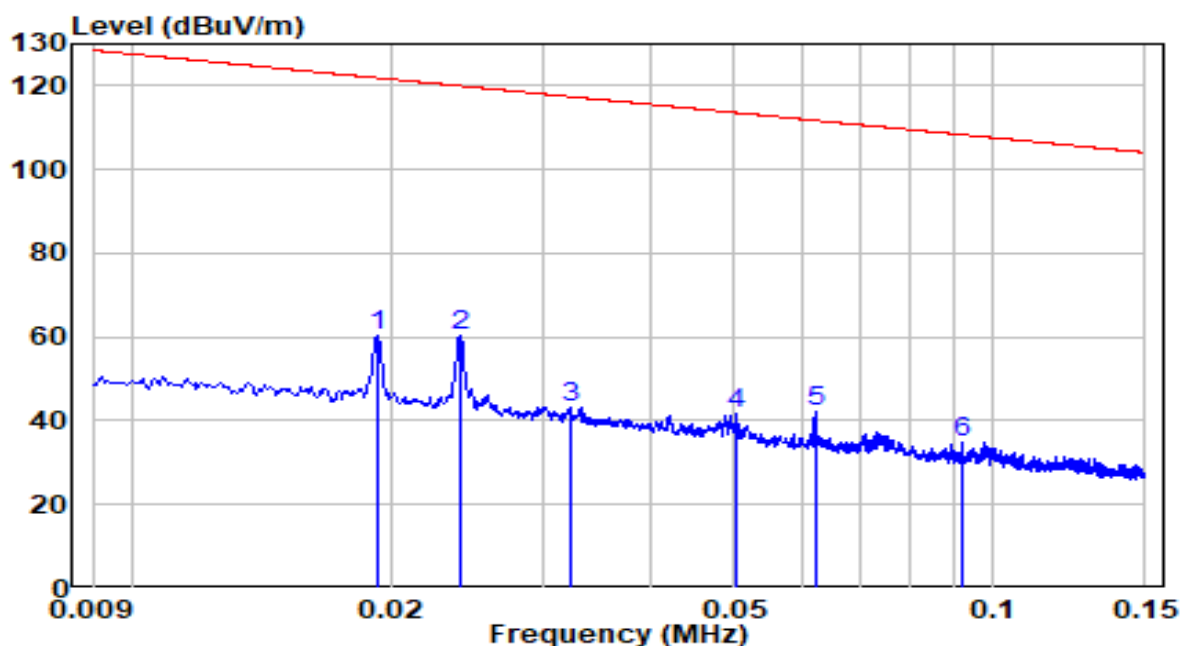


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 0.019           | 41.66          | 18.49      | 60.15                | -61.76      | 121.91         | Peak              |
| 2  | * 0.024         | 41.17          | 18.94      | 60.12                | -59.86      | 119.98         | Peak              |
| 3  | 0.032           | 23.91          | 19.50      | 43.41                | -74.02      | 117.44         | Peak              |
| 4  | 0.050           | 22.33          | 19.40      | 41.73                | -71.84      | 113.57         | Peak              |
| 5  | 0.062           | 22.94          | 19.14      | 42.08                | -69.64      | 111.72         | Peak              |
| 6  | 0.092           | 16.59          | 18.48      | 35.07                | -73.23      | 108.30         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-03-22    |
| Factor    | FMZB 1519B (9KHz~30MHz)_2021           | Temp. / Humidity     | 24.3°C /44.5% |
| Polarity  | face on                                | Site / Test Engineer | AC1 / Jay     |
| Test Mode | Transmit by 802.11b at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

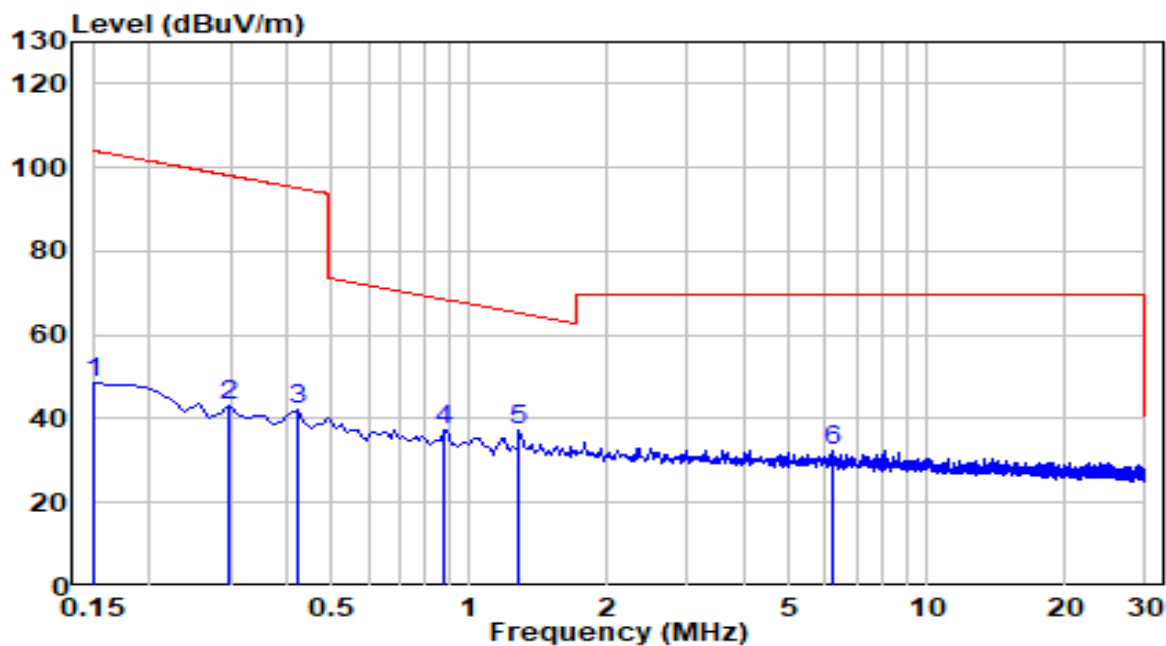


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 0.150           | 30.04          | 18.46      | 48.50                | -55.58      | 104.08         | Peak              |
| 2  | 0.299           | 24.17          | 18.92      | 43.09                | -54.99      | 98.08          | Peak              |
| 3  | 0.419           | 23.33          | 18.93      | 42.26                | -52.90      | 95.17          | Peak              |
| 4  | 0.881           | 18.25          | 19.04      | 37.29                | -31.43      | 68.72          | Peak              |
| 5  | * 1.284         | 18.07          | 19.04      | 37.11                | -28.34      | 65.45          | Peak              |
| 6  | 6.254           | 12.59          | 19.84      | 32.44                | -37.06      | 69.50          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-03-22    |
| Factor    | FMZB 1519B (9KHz~30MHz)_2021           | Temp. / Humidity     | 24.3°C /44.5% |
| Polarity  | face off                               | Site / Test Engineer | AC1 / Jay     |
| Test Mode | Transmit by 802.11b at Channel 2437MHz | Test Voltage         | 120V/60Hz     |

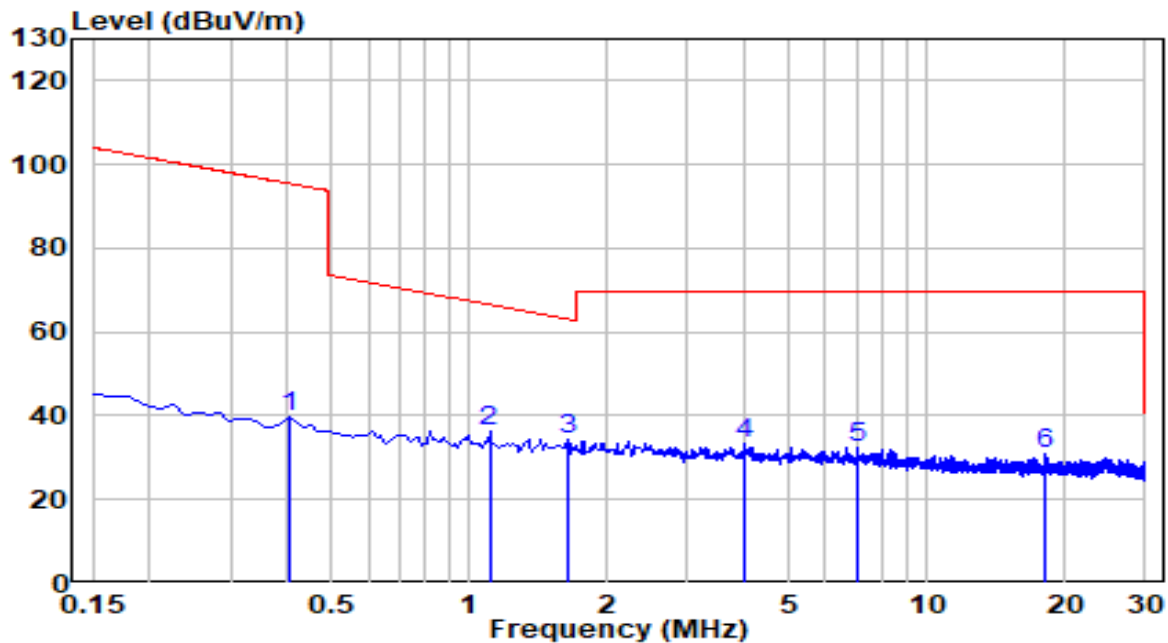


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 0.404           | 20.62          | 18.93      | 39.55                | -55.93      | 95.48          | Peak              |
| 2  | 1.105           | 17.22          | 19.06      | 36.27                | -30.48      | 66.76          | Peak              |
| 3  | * 1.643         | 15.18          | 18.99      | 34.18                | -29.15      | 63.32          | Peak              |
| 4  | 3.986           | 14.12          | 19.11      | 33.23                | -36.27      | 69.50          | Peak              |
| 5  | 7.030           | 12.18          | 20.13      | 32.30                | -37.20      | 69.50          | Peak              |
| 6  | 18.000          | 8.77           | 22.01      | 30.78                | -38.72      | 69.50          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                                 |                      |               |
|-----------|-------------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                    | Date of Test         | 2022-01-06    |
| Factor    | VULB 9162 (30MHz~8GHz) + 6dB<br>Attenuator_2020 | Temp. / Humidity     | 22.2°C /39.5% |
| Polarity  | Horizontal                                      | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at channel 2437MHz          | Test Voltage         | 120V/60Hz     |

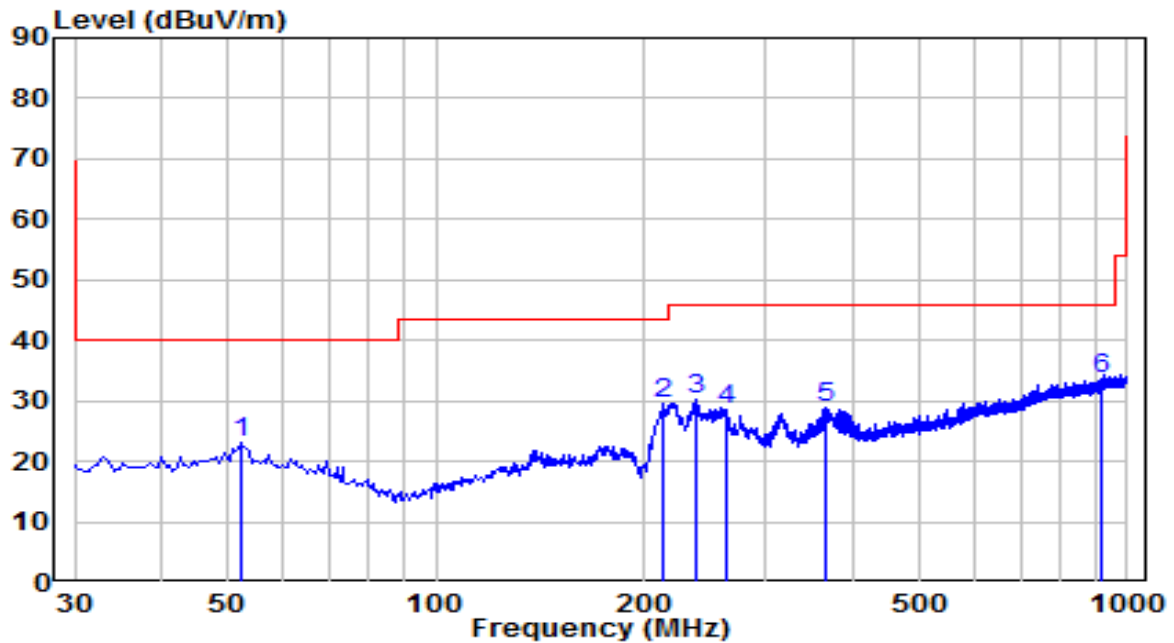


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 52.310          | 1.60           | 21.62      | 23.22                | -16.78      | 40.00          | Peak              |
| 2  | 213.815         | 10.58          | 18.96      | 29.53                | -13.97      | 43.50          | Peak              |
| 3  | 238.065         | 10.10          | 20.10      | 30.20                | -15.80      | 46.00          | Peak              |
| 4  | 262.315         | 8.04           | 20.60      | 28.64                | -17.36      | 46.00          | Peak              |
| 5  | 366.590         | 5.40           | 23.51      | 28.91                | -17.09      | 46.00          | Peak              |
| 6  | * 916.095       | 1.84           | 31.90      | 33.73                | -12.27      | 46.00          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                                 |                      |               |
|-----------|-------------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                    | Date of Test         | 2022-01-06    |
| Factor    | VULB 9162 (30MHz~8GHz) + 6dB<br>Attenuator_2020 | Temp. / Humidity     | 22.2°C /39.5% |
| Polarity  | Vertical                                        | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at channel 2437MHz          | Test Voltage         | 120V/60Hz     |

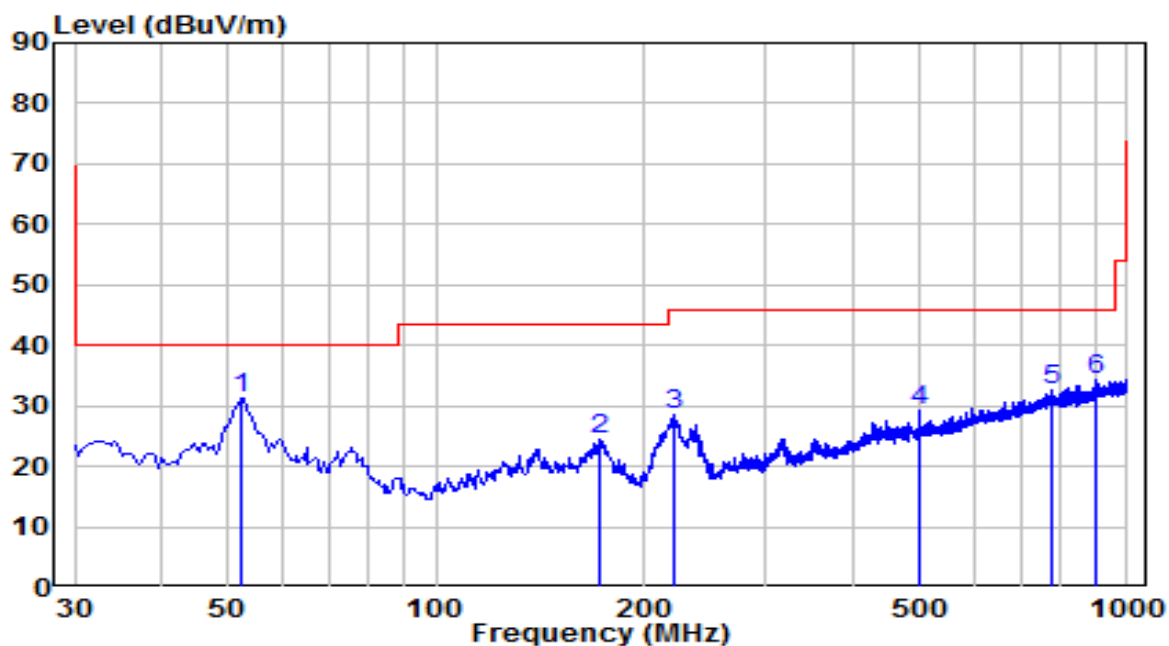


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 52.310          | 9.52           | 21.62      | 31.15                | -8.85       | 40.00          | Peak              |
| 2  |   | 173.075         | 7.74           | 16.87      | 24.61                | -18.89      | 43.50          | Peak              |
| 3  |   | 220.605         | 9.30           | 19.25      | 28.55                | -17.45      | 46.00          | Peak              |
| 4  |   | 499.965         | 2.97           | 26.22      | 29.19                | -16.81      | 46.00          | Peak              |
| 5  |   | 777.385         | 2.33           | 30.32      | 32.65                | -13.35      | 46.00          | Peak              |
| 6  |   | 904.455         | 2.39           | 31.80      | 34.20                | -11.80      | 46.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

### The Result of Radiated Spurious Emission above 18GHz:

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-25    |
| Factor    | BBHA 9170 (15GHz~40GHz)_2021           | Temp. / Humidity     | 19.5°C/37.2%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2437MHz | Test Voltage         | 120V / 60Hz   |

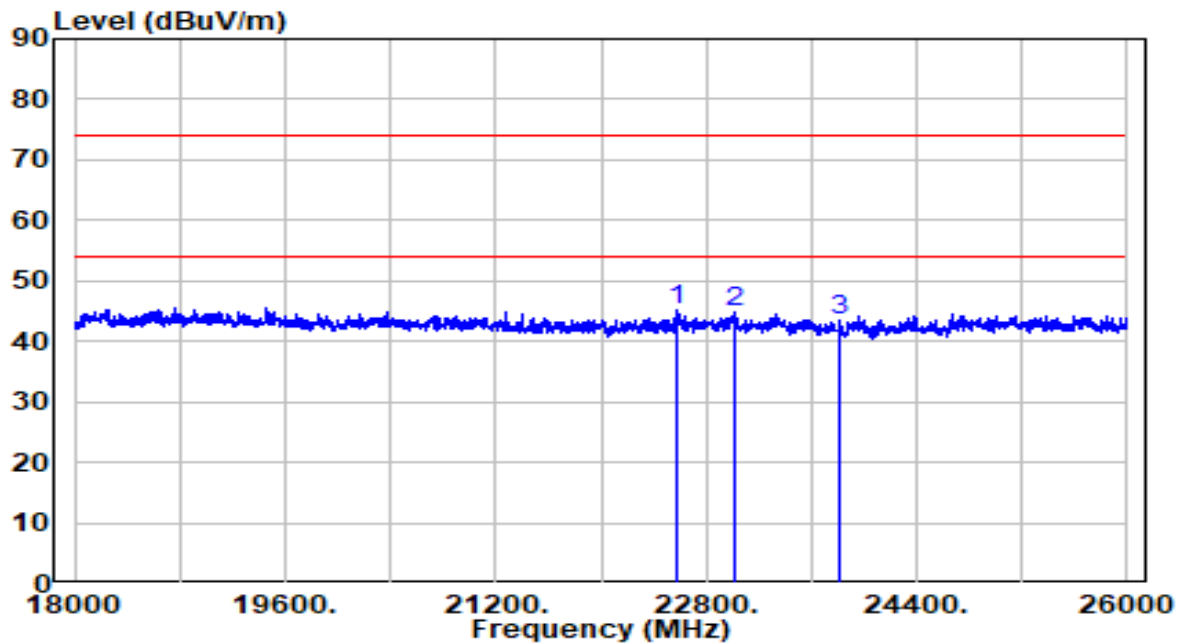


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 22568.000       | 41.21          | 3.84       | 45.05                | -28.95      | 74.00          | Peak              |
| 2  |   | 23008.000       | 40.66          | 4.10       | 44.77                | -29.23      | 74.00          | Peak              |
| 3  |   | 23808.000       | 39.32          | 4.08       | 43.40                | -30.60      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-25    |
| Factor    | BBHA 9170 (15GHz~40GHz)_2021           | Temp. / Humidity     | 19.5°C/37.2%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2437MHz | Test Voltage         | 120V / 60Hz   |

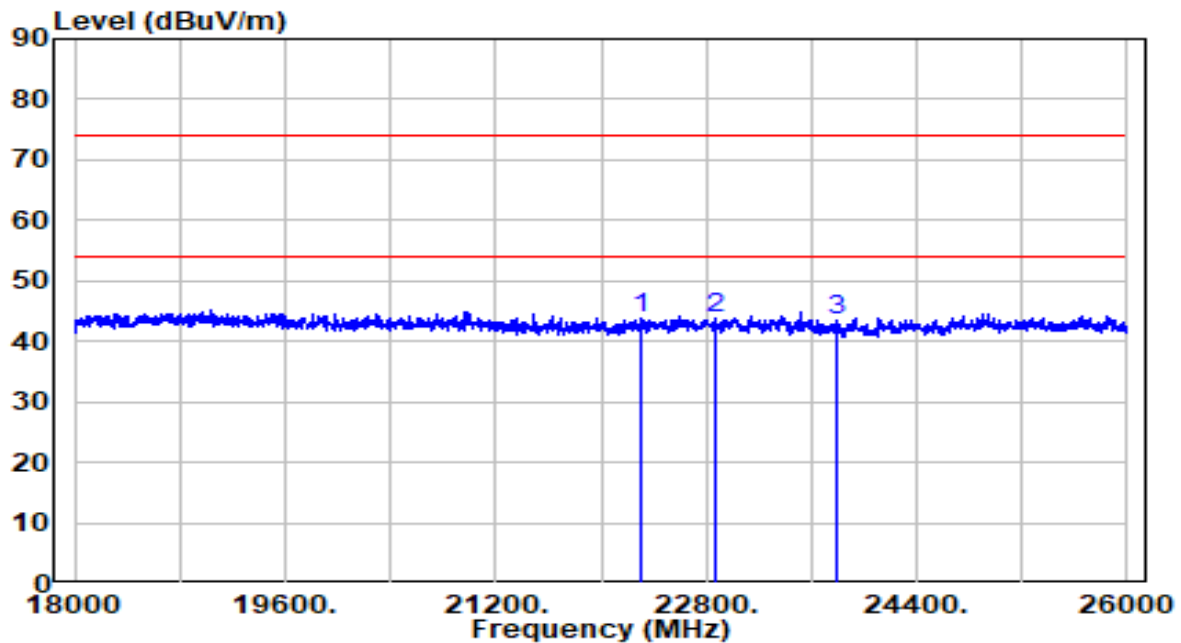

| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 22304.000       | 40.05          | 3.64       | 43.69                | -30.31      | 74.00          | Peak              |
| 2  | * 22872.000     | 39.75          | 4.02       | 43.78                | -30.22      | 74.00          | Peak              |
| 3  | 23800.000       | 39.26          | 4.08       | 43.34                | -30.66      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

## 7.7. Radiated Restricted Band Edge Measurement

### 7.7.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency<br>(MHz)         | Frequency<br>(MHz)    | Frequency<br>(MHz) | Frequency<br>(GHz) |
|----------------------------|-----------------------|--------------------|--------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410        | 4.5 - 5.15         |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614          | 5.35 - 5.46        |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240         | 7.25 - 7.75        |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427        | 8.025 - 8.5        |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5      | 9.0 - 9.2          |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5    | 9.3 - 9.5          |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710        | 10.6 - 12.7        |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2    | 13.25 - 13.4       |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300        | 14.47 - 14.5       |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390        | 15.35 - 16.2       |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500      | 17.7 - 21.4        |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900        | 22.01 - 23.12      |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267        | 23.6 - 24.0        |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339        | 31.2 - 31.8        |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358      | 36.43 - 36.5       |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400        | ( <sup>2</sup> )   |
| 13.36 - 13.41              | --                    | --                 | --                 |

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 Limits |                          |                               |
|-----------------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                            | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                                 | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                                 | 24000/F (kHz)            | 30                            |
| 1.705 - 30                                    | 30                       | 30                            |
| 30 - 88                                       | 100                      | 3                             |
| 88 - 216                                      | 150                      | 3                             |
| 216 - 960                                     | 200                      | 3                             |
| Above 960                                     | 500                      | 3                             |

#### 7.7.2.Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

#### 7.7.3.Test Setting

##### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.

If the EUT duty cycle is  $< 98\%$ , set  $VBW \geq 1/T$ . T is the minimum transmission duration.

|         |        |              |        |               |        |
|---------|--------|--------------|--------|---------------|--------|
| 802.11b | 82 Hz  | 802.11n-HT20 | 180 Hz | 802.11ax-HE20 | 180 Hz |
| 802.11g | 510 Hz | 802.11n-HT40 | 180 Hz | 802.11ax-HE20 | 180 Hz |

4. Average Type = Voltage
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to stabilize


#### 7.7.4.Test Setup

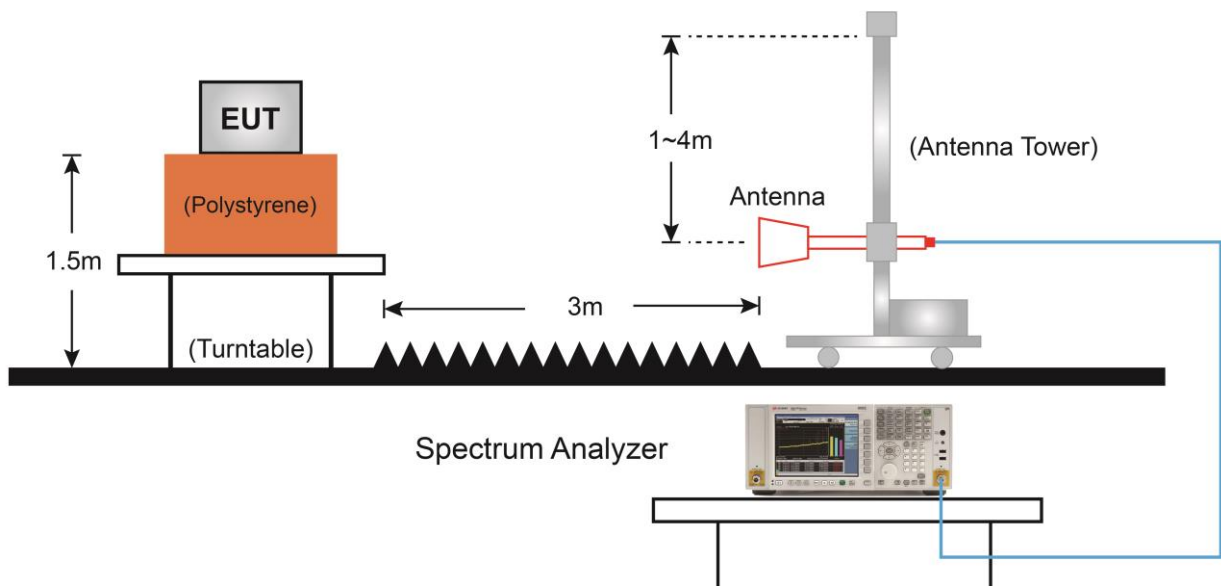

### 7.7.5.Test Result

#### Filter Configuration 1#

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 25.4°C/58.2%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

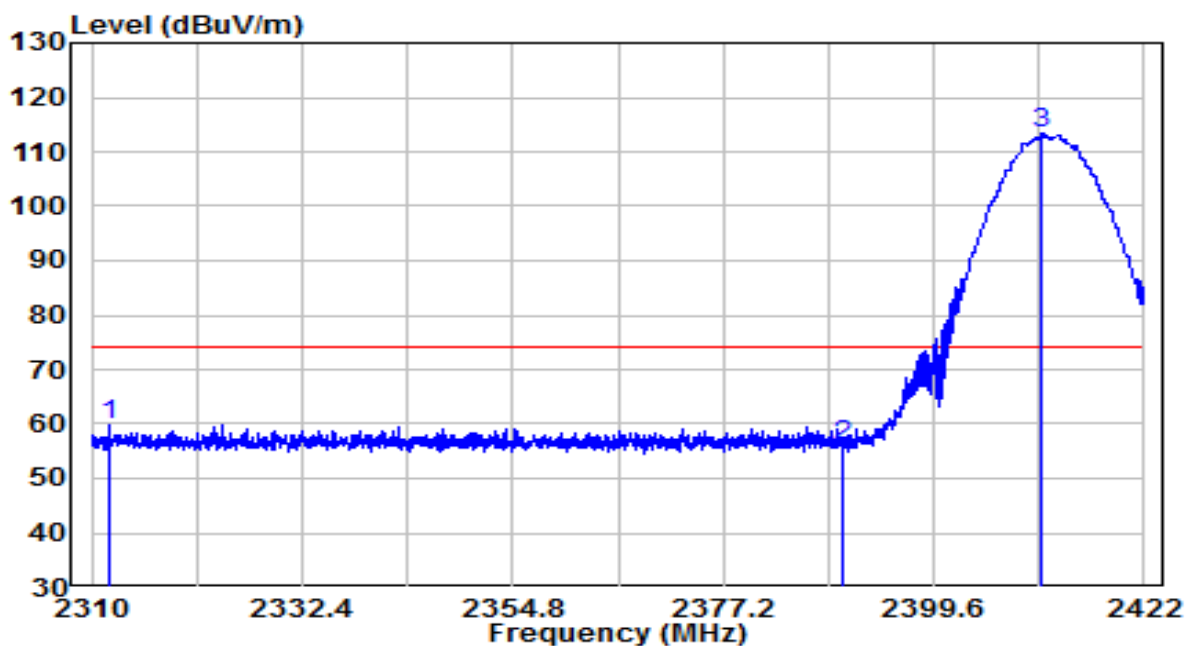


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2311.792        | 27.98          | 31.89      | 59.87                | -14.13      | 74.00          | Peak              |
| 2  | 2390.000        | 23.68          | 32.22      | 55.90                | -18.10      | 74.00          | Peak              |
| 3  | * 2411.136      | 81.02          | 32.31      | 113.32               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 25.4°C/58.2%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

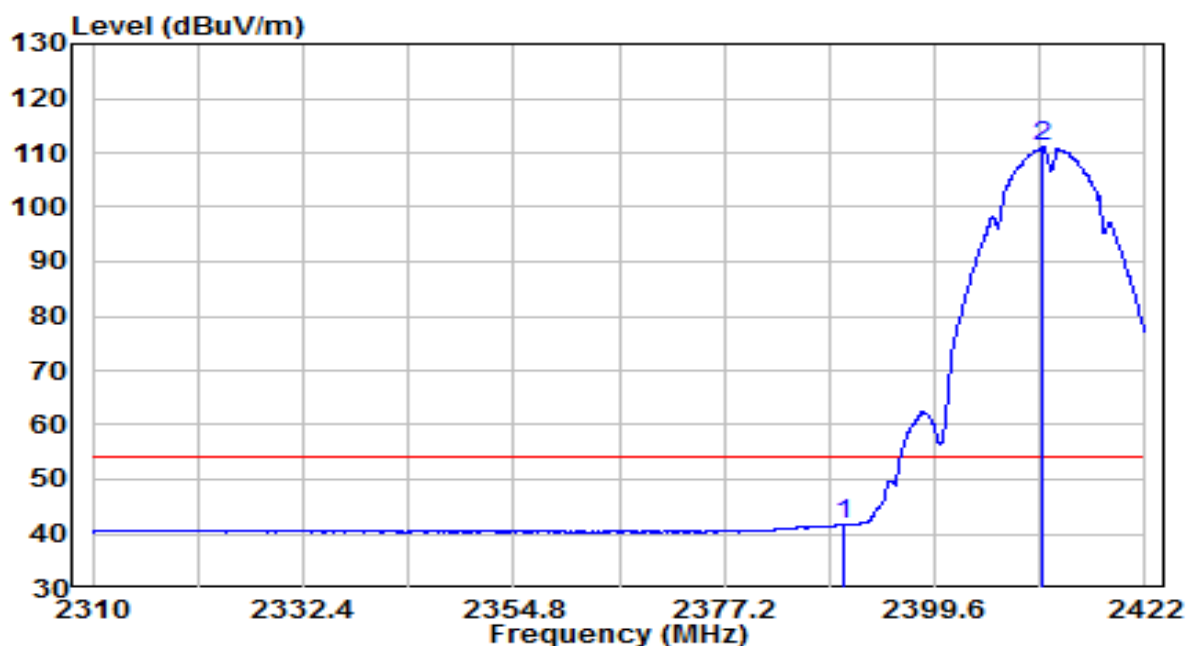


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 9.55           | 32.22      | 41.77                | -12.23      | 54.00          | Average           |
| 2  | * 2411.136      | 78.79          | 32.31      | 111.10               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 25.4°C/58.2%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

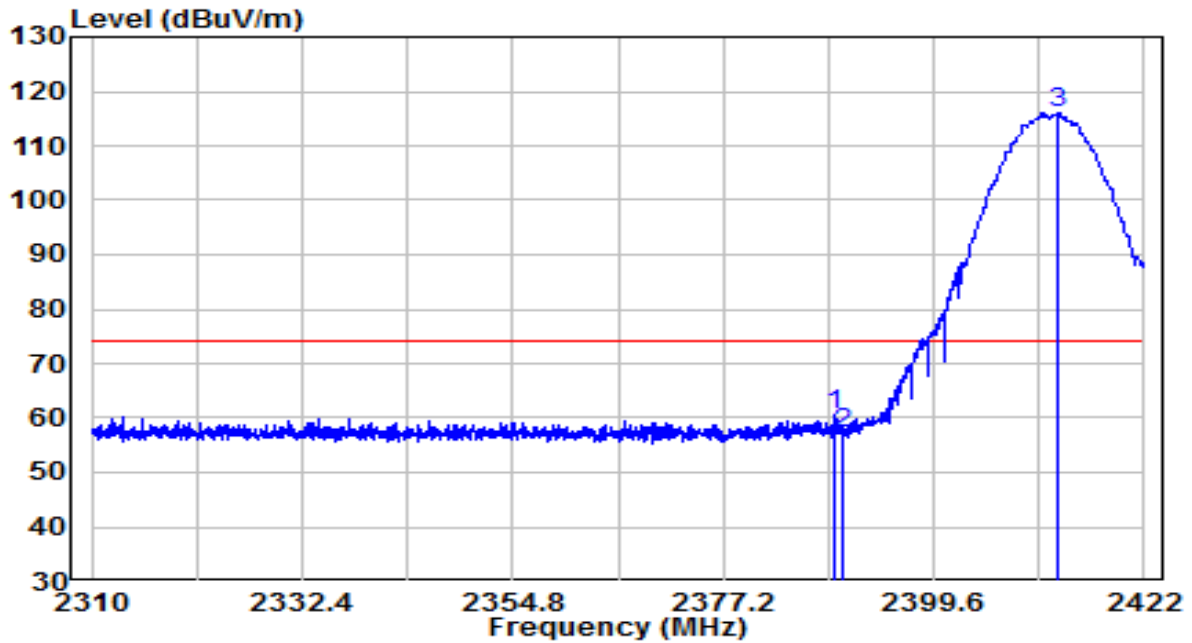


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.072        | 28.30          | 32.21      | 60.51                | -13.49      | 74.00          | Peak              |
| 2  | 2390.000        | 25.06          | 32.22      | 57.28                | -16.72      | 74.00          | Peak              |
| 3  | * 2412.872      | 83.71          | 32.31      | 116.02               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 25.4°C/58.2%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

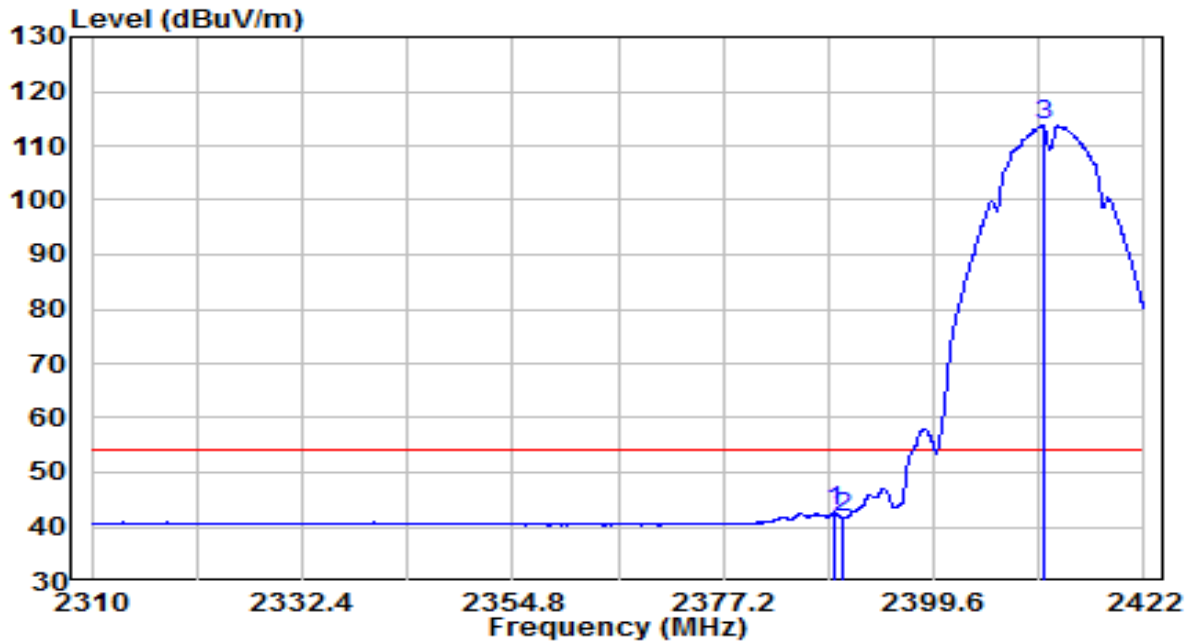


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2388.960        | 10.44          | 32.21      | 42.65                | -11.35      | 54.00          | Average           |
| 2  | 2390.000        | 9.56           | 32.22      | 41.78                | -12.22      | 54.00          | Average           |
| 3  | * 2411.248      | 81.44          | 32.31      | 113.75               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 25.4°C/58.2%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

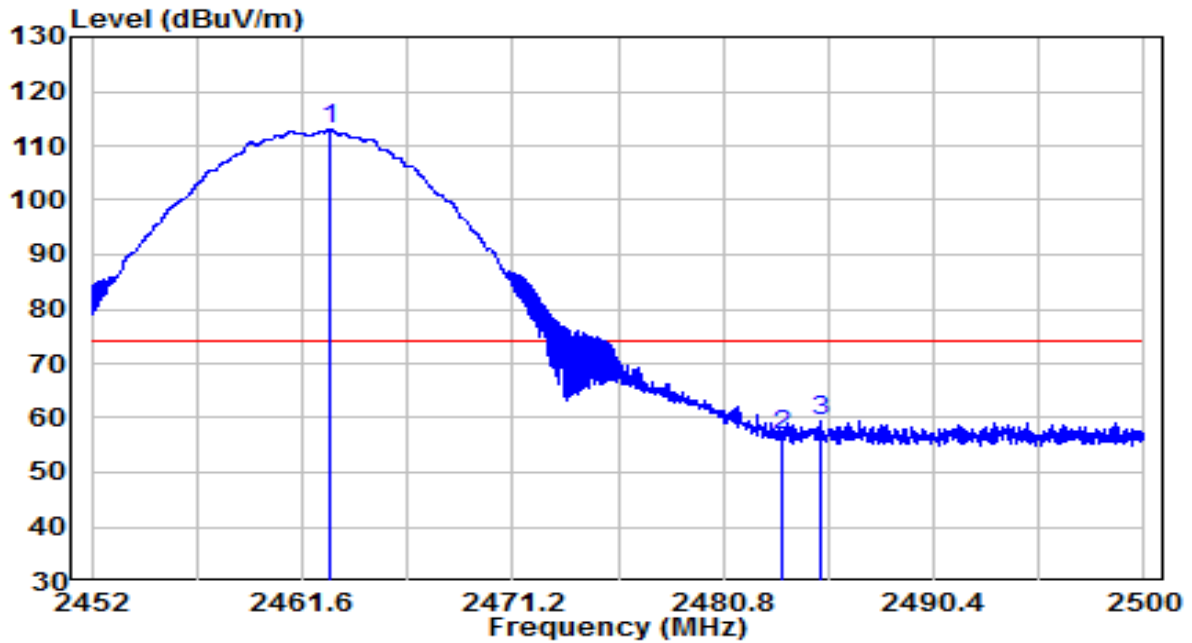


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2462.872        | 80.47          | 32.52      | 112.99               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 24.13          | 32.61      | 56.74                | -17.26      | 74.00          | Peak              |
| 3  |   | 2485.240        | 26.70          | 32.62      | 59.32                | -14.68      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 25.4°C/58.2%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

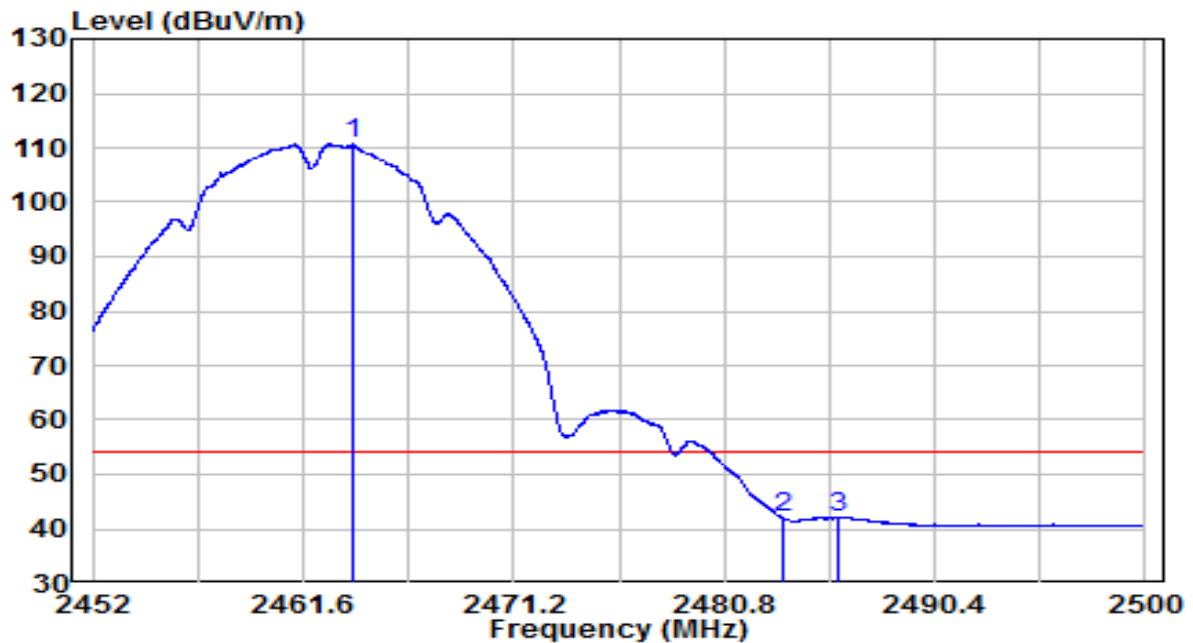


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2463.928        | 78.23          | 32.53      | 110.76               | N/A         | N/A            | Average           |
| 2  |   | 2483.500        | 9.29           | 32.61      | 41.90                | -12.10      | 54.00          | Average           |
| 3  |   | 2485.984        | 9.49           | 32.62      | 42.12                | -11.88      | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 25.4°C/58.2%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

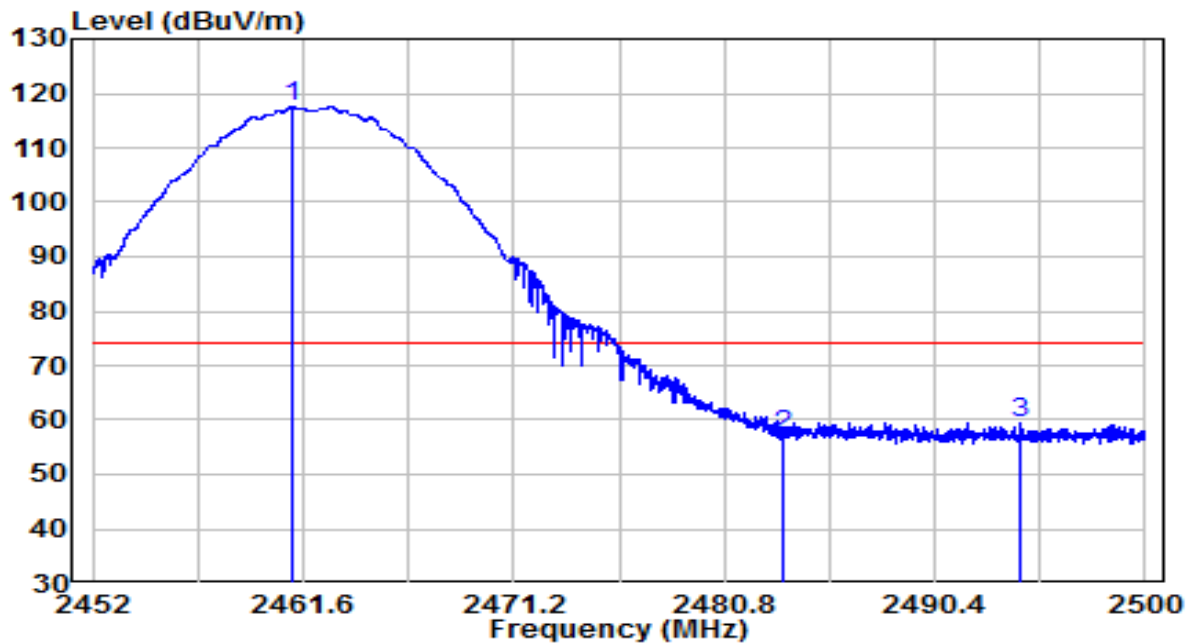


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2461.096        | 85.06          | 32.52      | 117.58               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 24.73          | 32.61      | 57.34                | -16.66      | 74.00          | Peak              |
| 3  |   | 2494.312        | 26.83          | 32.66      | 59.49                | -14.51      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 25.4°C/58.2%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

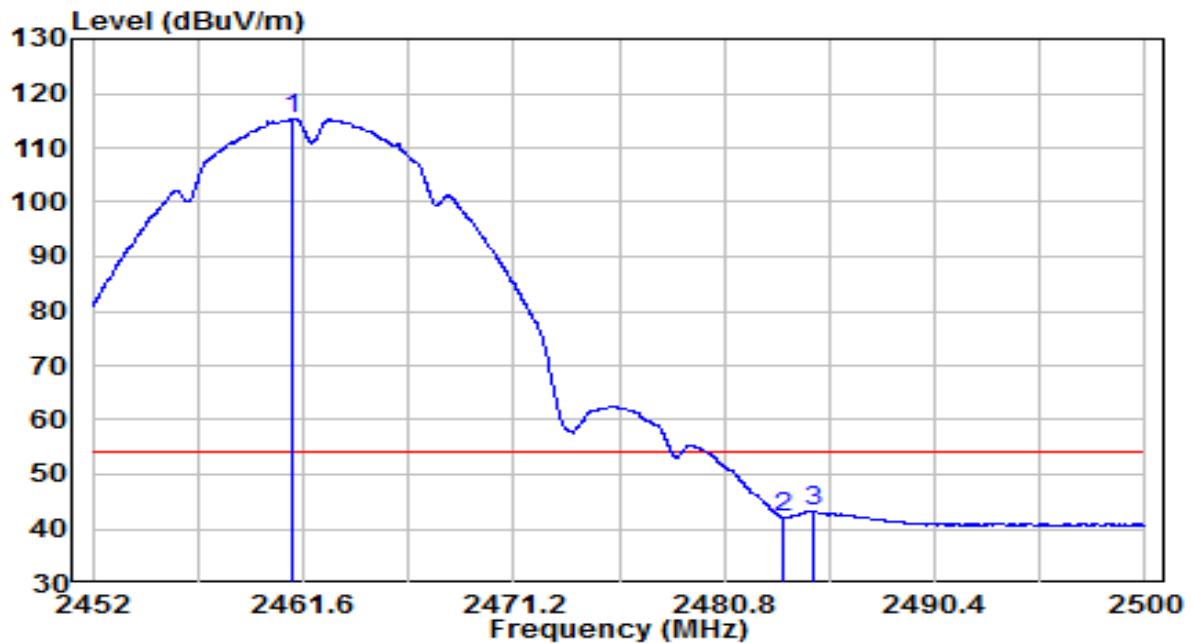


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2461.144        | 82.85          | 32.52      | 115.37               | N/A         | N/A            | Average           |
| 2  |   | 2483.500        | 9.52           | 32.61      | 42.13                | -11.87      | 54.00          | Average           |
| 3  |   | 2484.808        | 10.72          | 32.62      | 43.34                | -10.66      | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 25.4°C/58.2%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

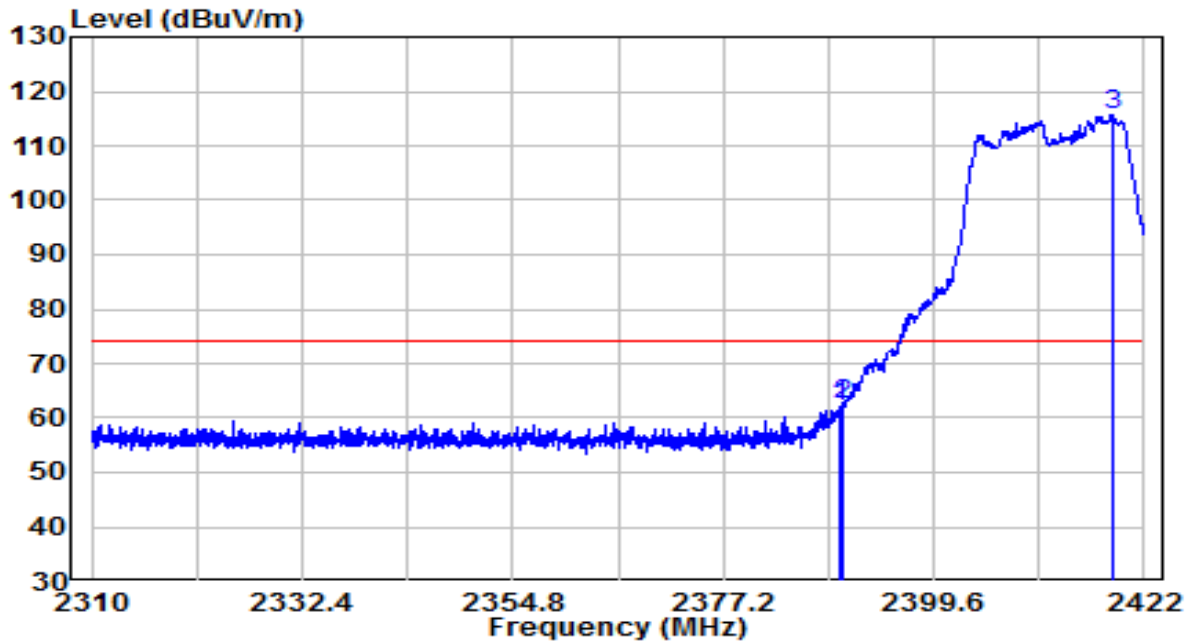


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.520        | 29.77          | 32.22      | 61.99                | -12.01      | 74.00          | Peak              |
| 2  | 2390.000        | 30.19          | 32.22      | 62.41                | -11.59      | 74.00          | Peak              |
| 3  | * 2418.696      | 83.49          | 32.34      | 115.83               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 25.4°C/58.2%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

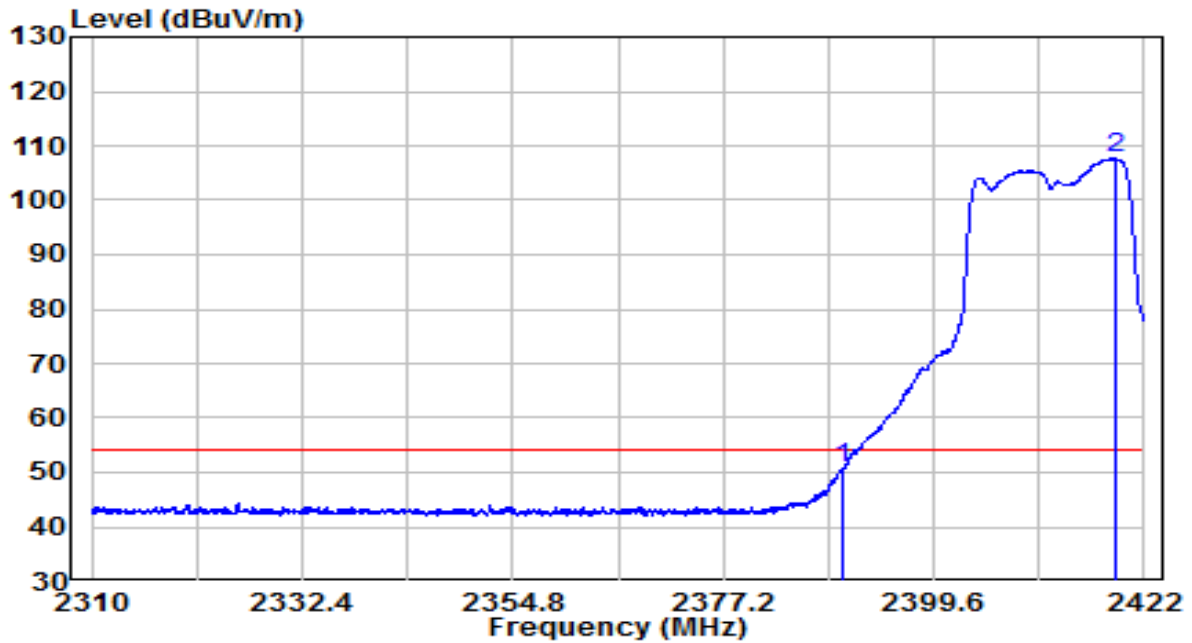


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 18.72          | 32.22      | 50.93                | -3.07       | 54.00          | Average           |
| 2  | * 2418.920      | 75.28          | 32.34      | 107.62               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 25.4°C/58.2%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

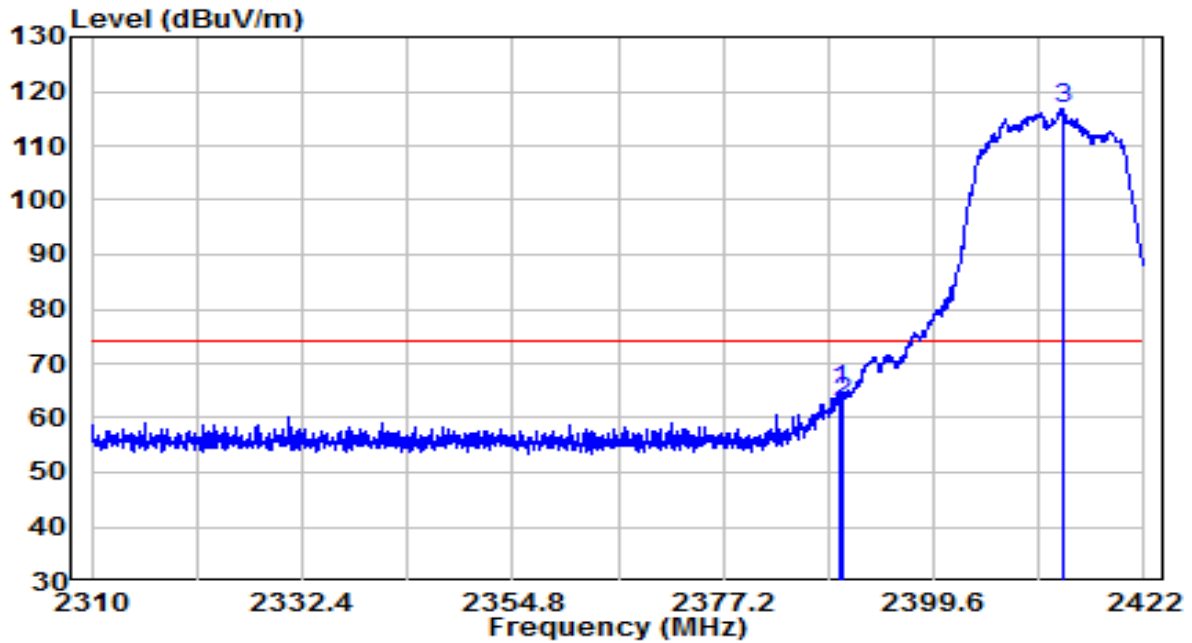


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.632        | 32.70          | 32.22      | 64.92                | -9.08       | 74.00          | Peak              |
| 2  | 2390.000        | 30.69          | 32.22      | 62.91                | -11.09      | 74.00          | Peak              |
| 3  | * 2413.264      | 84.56          | 32.32      | 116.88               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 25.4°C/58.2%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

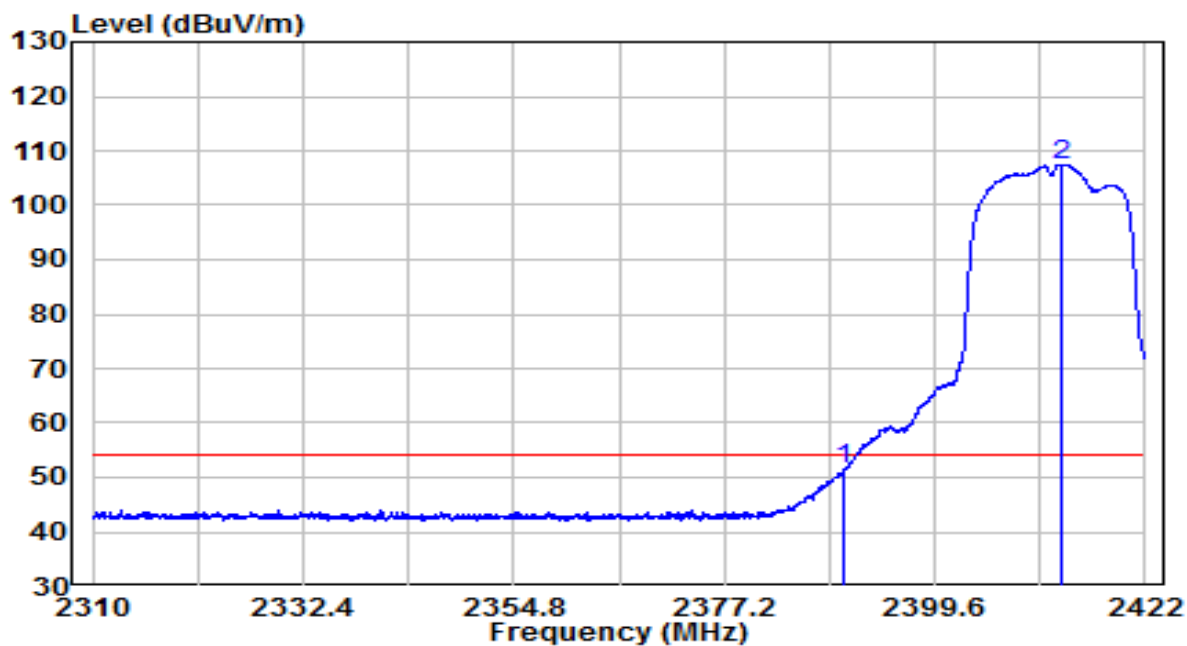


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 19.34          | 32.22      | 51.56                | -2.44       | 54.00          | Average           |
| 2  | * 2413.040      | 75.18          | 32.31      | 107.49               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 25.4°C/58.2%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

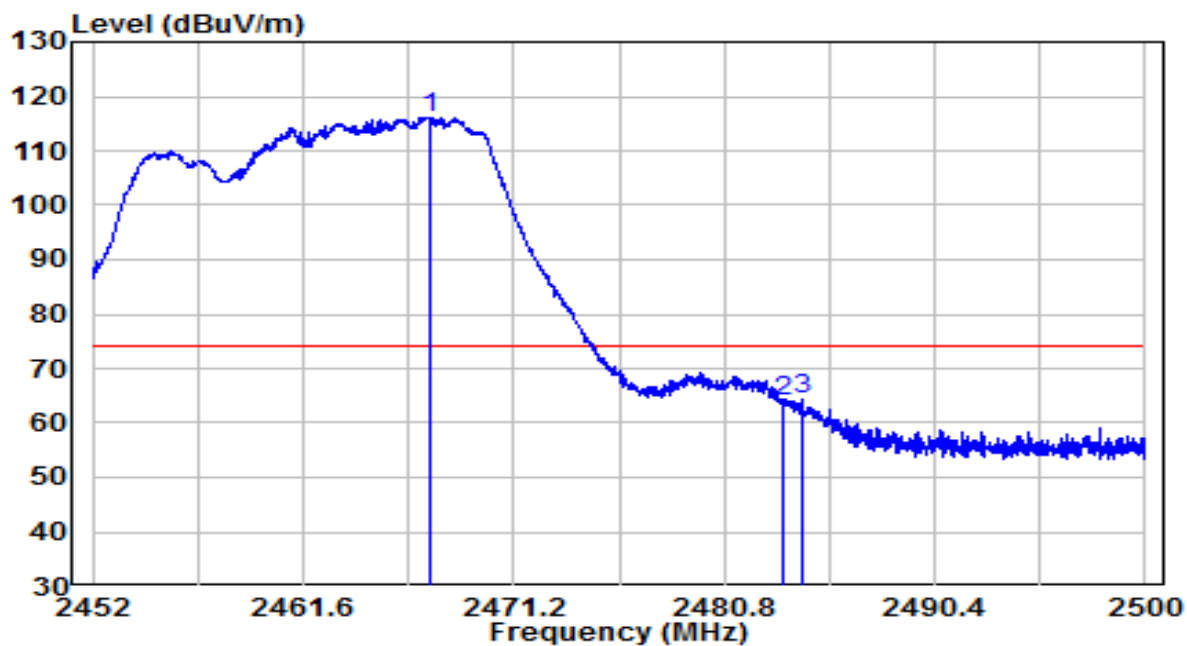


| No |   | Frequency<br>(MHz) | Reading<br>(dBμV) | C.F<br>(dB/m) | Measurement<br>(dBμV/m) | Margin<br>(dB) | Limit<br>(dBμV/m) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------------|
| 1  | * | 2467.336           | 83.68             | 32.54         | 116.22                  | N/A            | N/A               | Peak                 |
| 2  |   | 2483.500           | 31.32             | 32.61         | 63.93                   | -10.07         | 74.00             | Peak                 |
| 3  |   | 2484.400           | 31.65             | 32.61         | 64.26                   | -9.74          | 74.00             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 25.4°C/58.2%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

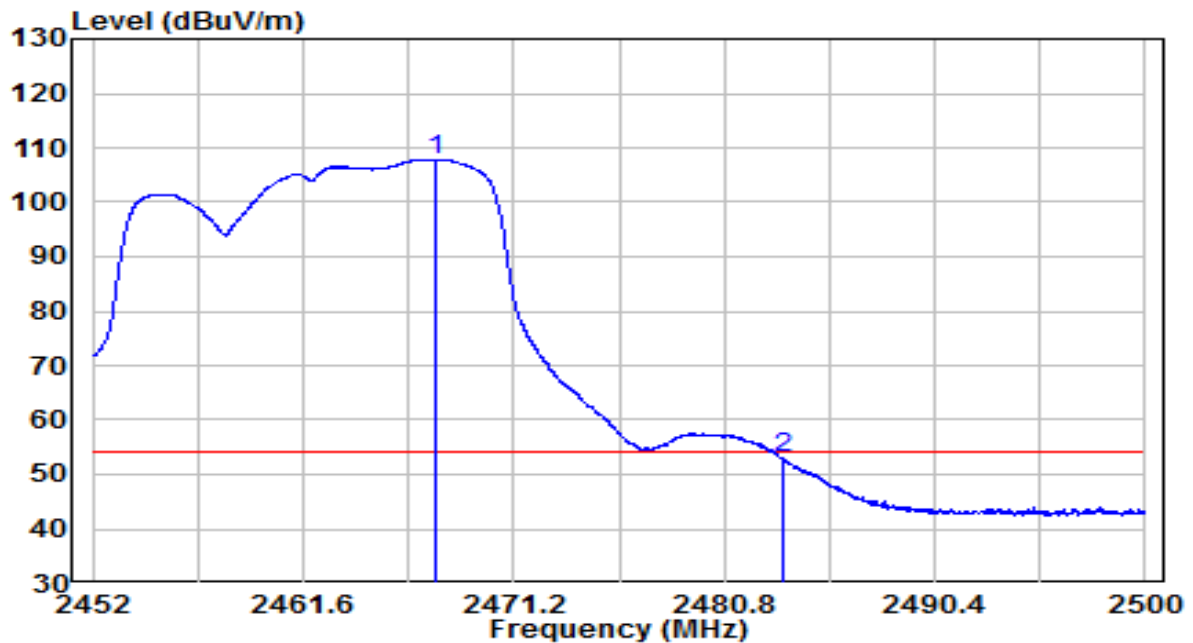


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * 2467.624      | 75.36          | 32.54      | 107.90               | N/A         | N/A            | Average           |
| 2  | 2483.500        | 20.24          | 32.61      | 52.85                | -1.15       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 25.4°C/58.2%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

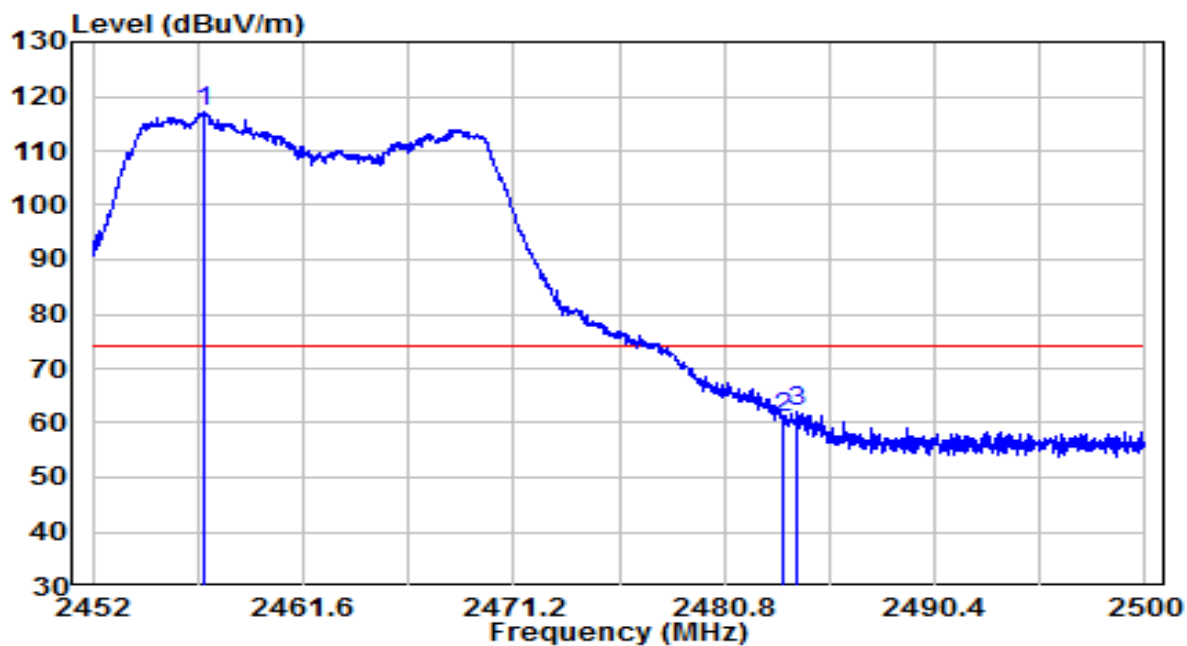


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2457.064        | 84.55          | 32.50      | 117.05               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 28.22          | 32.61      | 60.83                | -13.17      | 74.00          | Peak              |
| 3  |   | 2484.088        | 29.53          | 32.61      | 62.15                | -11.85      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 25.4°C/58.2%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

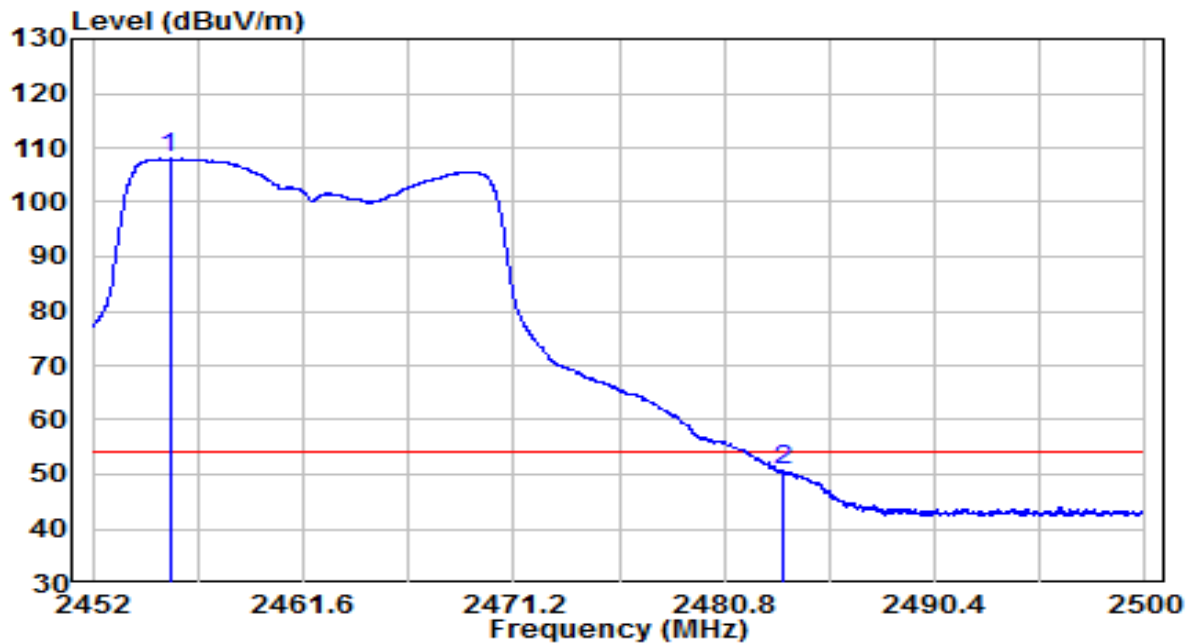


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2455.504        | 75.47          | 32.49      | 107.96               | N/A         | N/A            | Average           |
| 2  |   | 2483.488        | 17.96          | 32.61      | 50.58                | -3.42       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

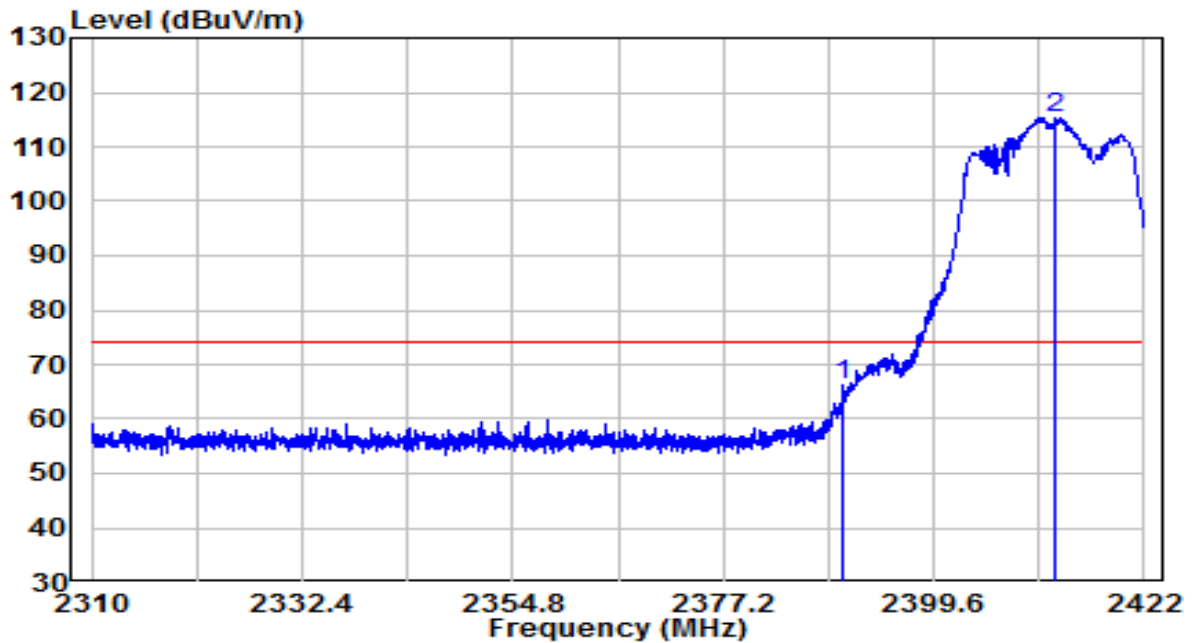


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 33.98          | 32.22      | 66.20                | -7.80       | 74.00          | Peak              |
| 2  | * 2412.536      | 83.15          | 32.31      | 115.46               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

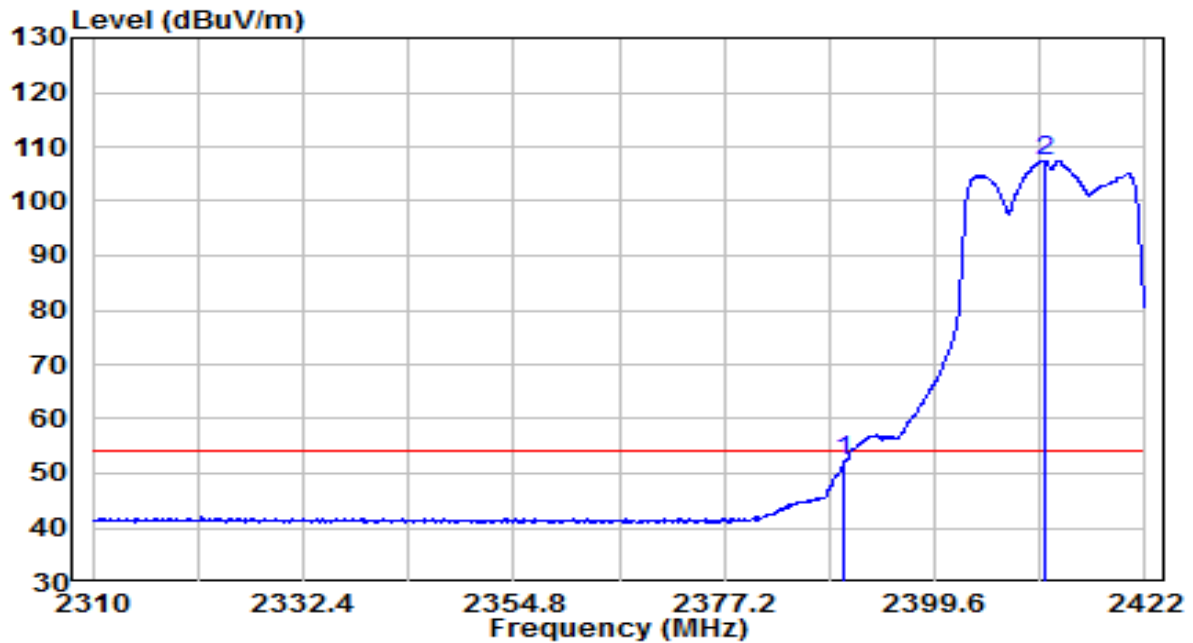


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 19.92          | 32.22      | 52.14                | -1.86       | 54.00          | Average           |
| 2  | * 2411.360      | 75.11          | 32.31      | 107.42               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

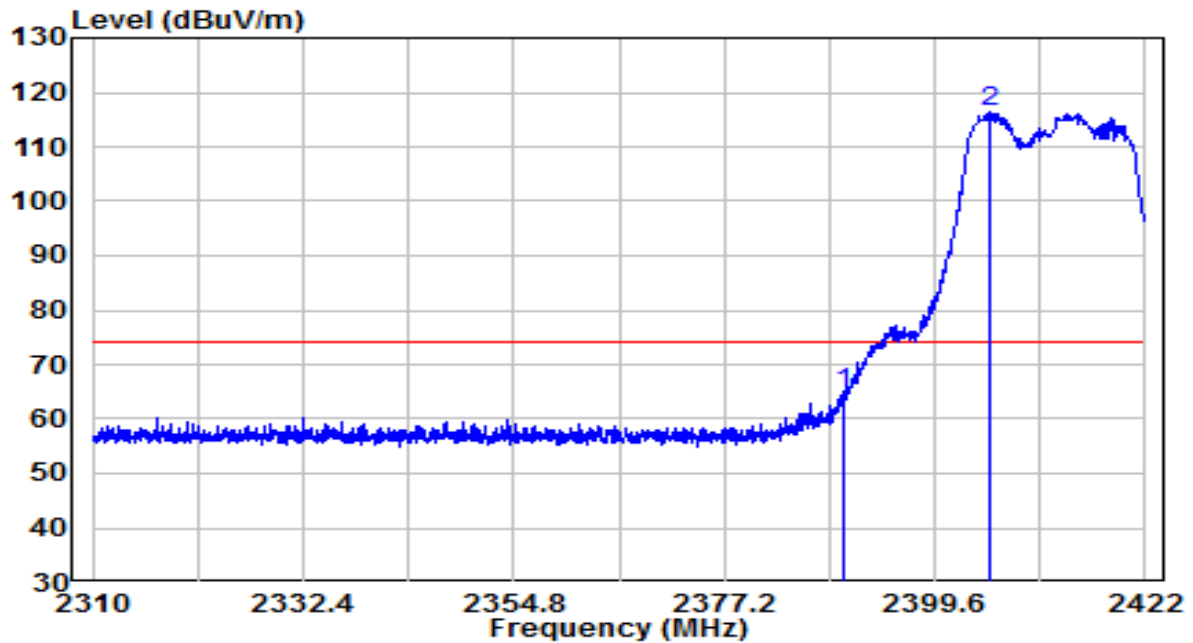


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 32.55          | 32.22      | 64.77                | -9.23       | 74.00          | Peak              |
| 2  | * 2405.536      | 84.08          | 32.28      | 116.36               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

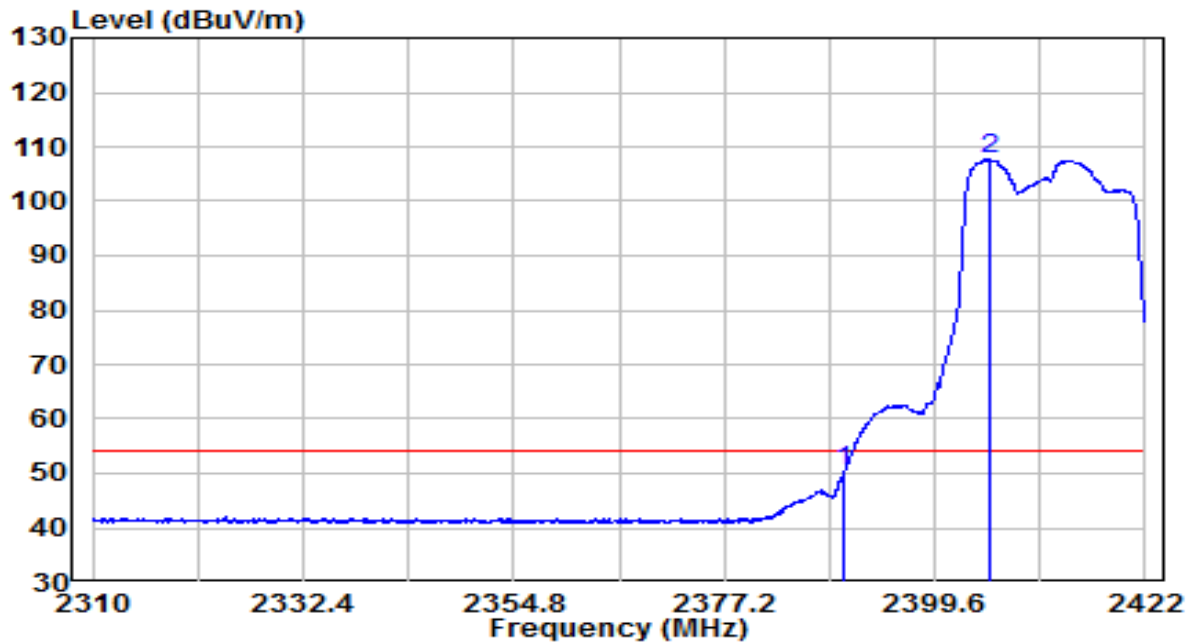


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 18.16          | 32.22      | 50.38                | -3.62       | 54.00          | Average           |
| 2  | * 2405.424      | 75.32          | 32.28      | 107.61               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

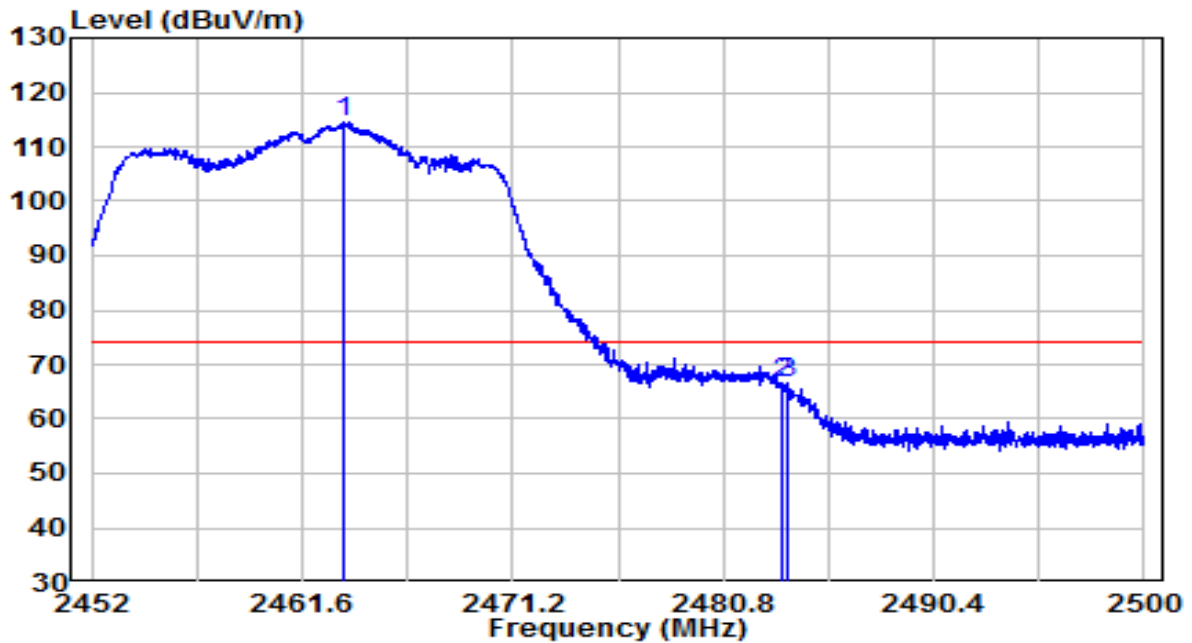


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2463.520        | 81.93          | 32.53      | 114.46               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 33.80          | 32.61      | 66.42                | -7.58       | 74.00          | Peak              |
| 3  |   | 2483.728        | 33.85          | 32.61      | 66.47                | -7.53       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

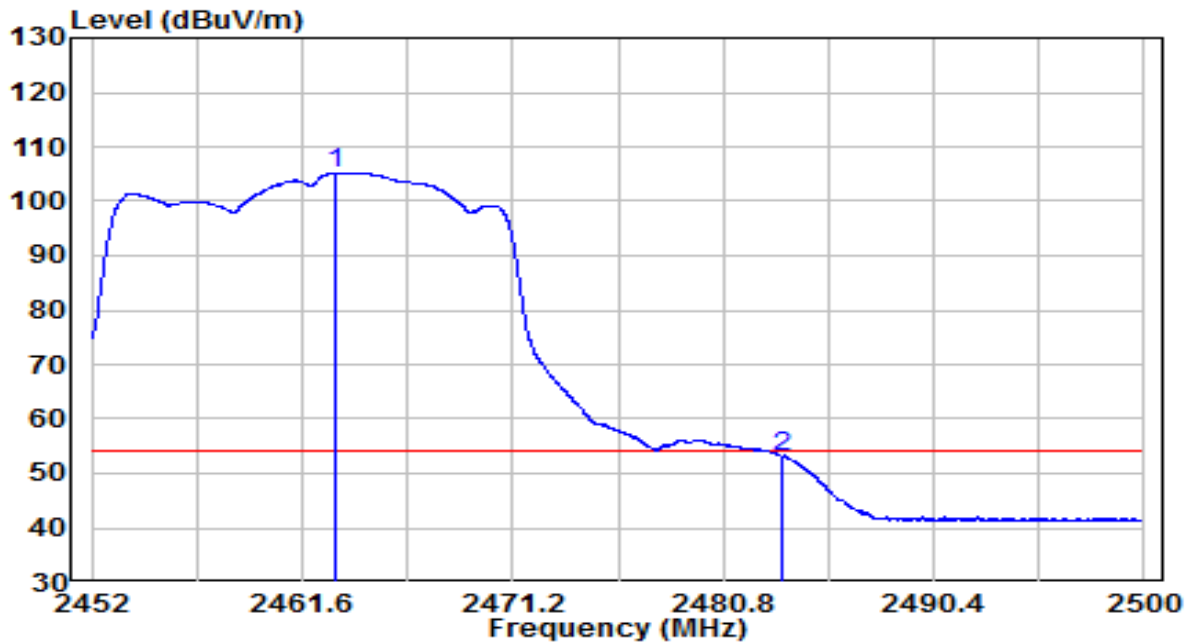


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2463.136        | 72.70          | 32.53      | 105.23               | N/A         | N/A            | Average           |
| 2  |   | 2483.500        | 20.46          | 32.61      | 53.07                | -0.93       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

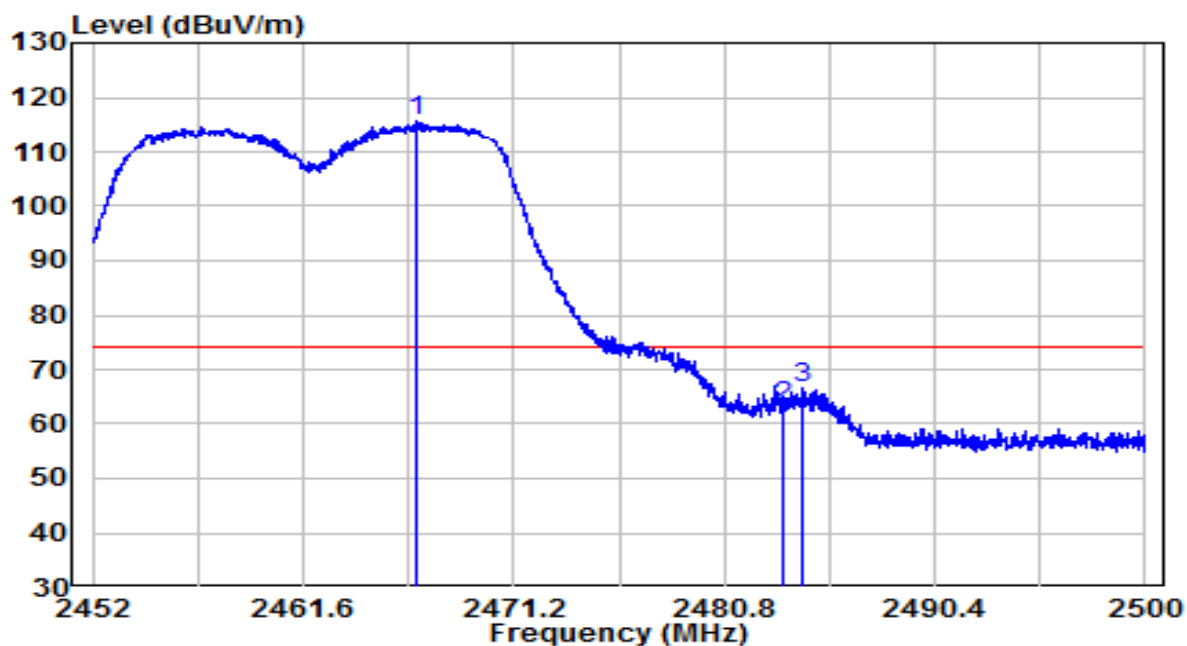


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2466.808        | 83.18          | 32.54      | 115.72               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 30.78          | 32.61      | 63.39                | -10.61      | 74.00          | Peak              |
| 3  |   | 2484.424        | 33.92          | 32.61      | 66.53                | -7.47       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

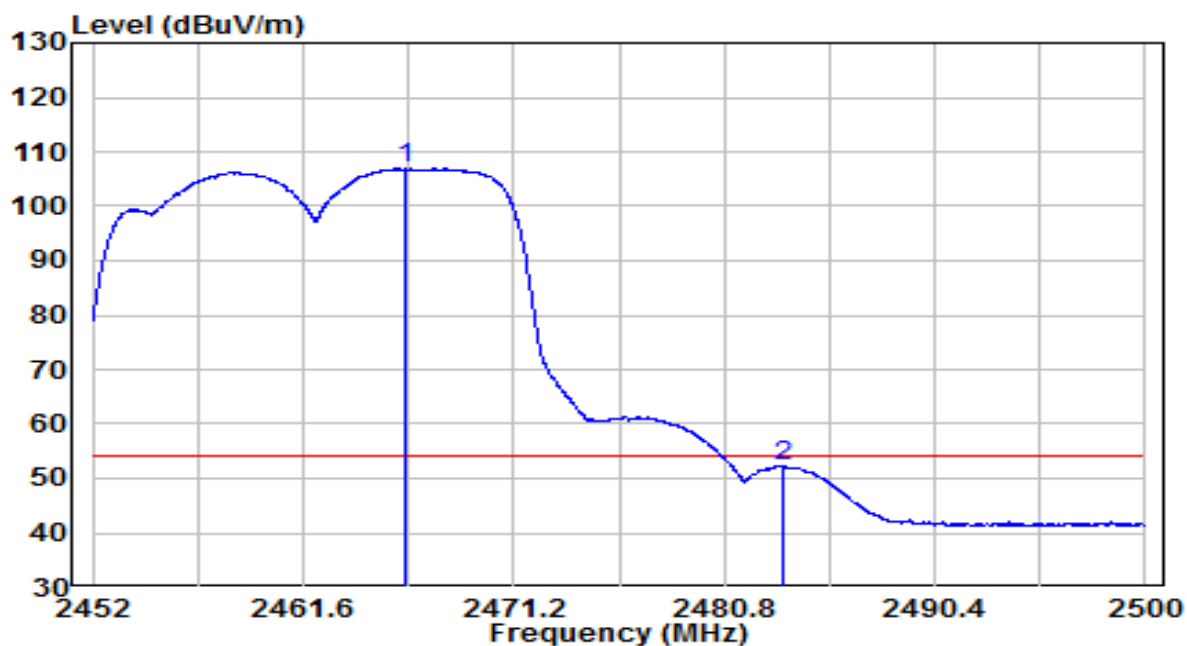


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2466.232        | 74.34          | 32.54      | 106.88               | N/A         | N/A            | Average           |
| 2  |   | 2483.500        | 19.52          | 32.61      | 52.13                | -1.87       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

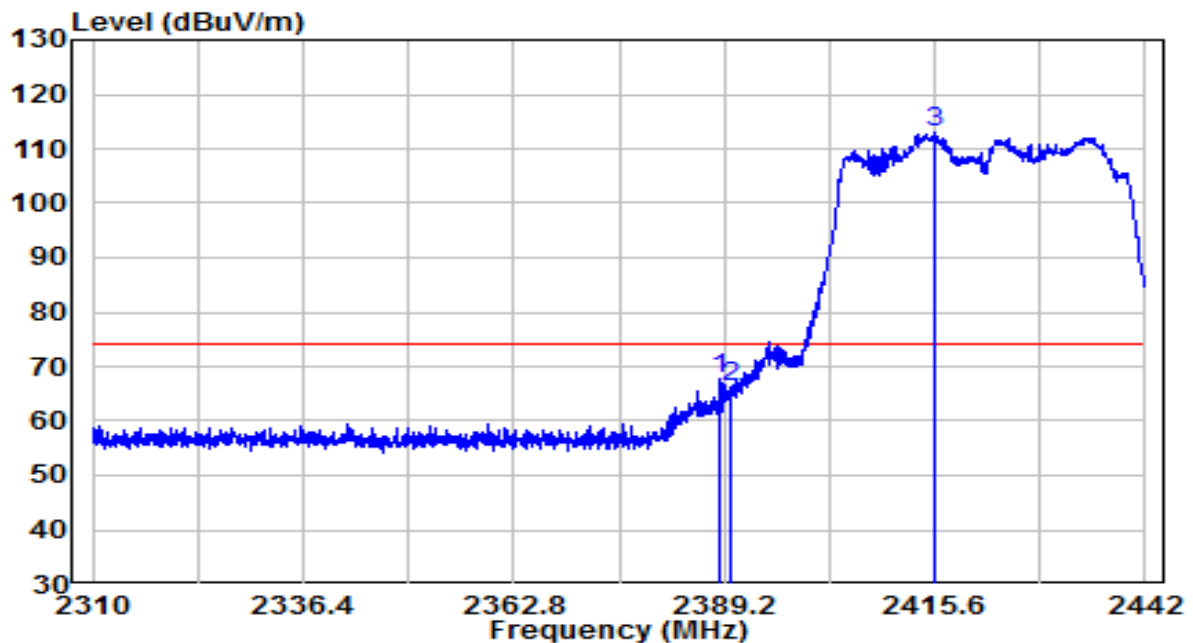


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2388.672        | 35.37          | 32.21      | 67.58                | -6.42       | 74.00          | Peak              |
| 2  | 2390.000        | 33.85          | 32.22      | 66.07                | -7.93       | 74.00          | Peak              |
| 3  | * 2415.732      | 80.81          | 32.33      | 113.14               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

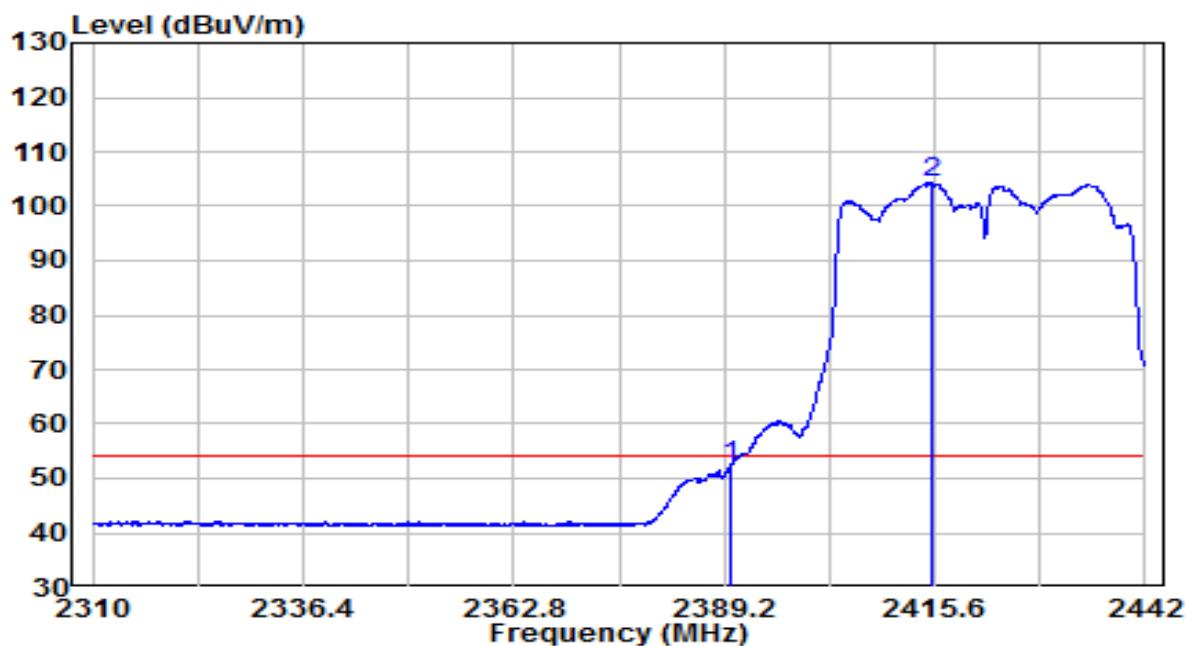


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 20.11          | 32.22      | 52.33                | -1.67       | 54.00          | Average           |
| 2  | * 2415.270      | 72.05          | 32.32      | 104.37               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

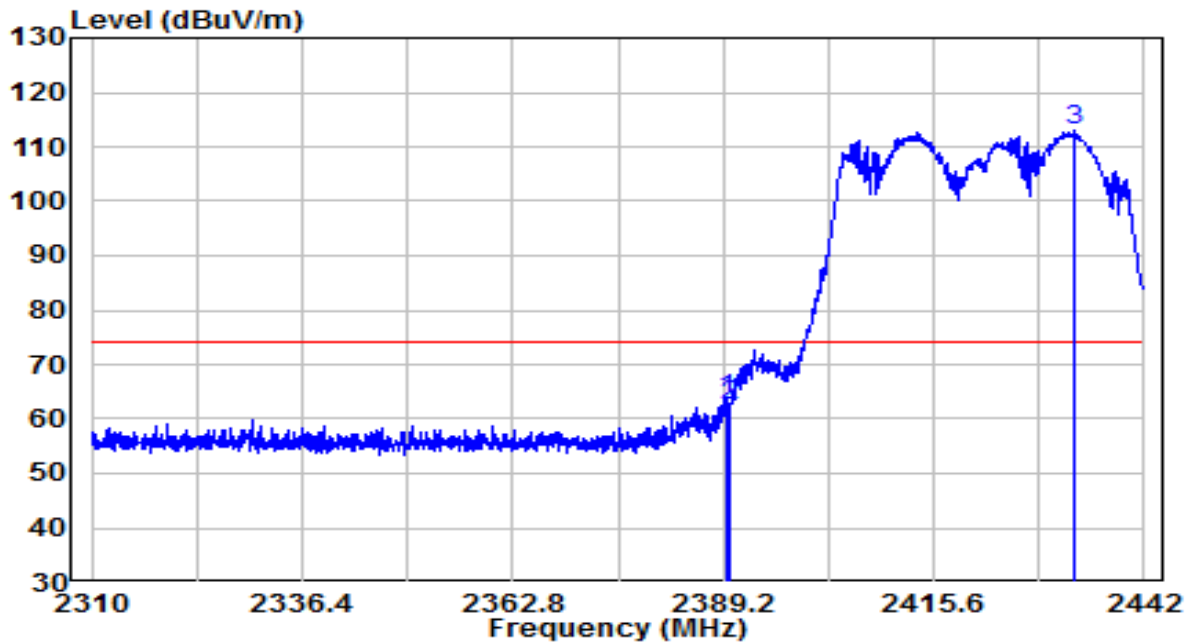


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.530        | 31.54          | 32.22      | 63.76                | -10.24      | 74.00          | Peak              |
| 2  | 2390.000        | 30.08          | 32.22      | 62.30                | -11.70      | 74.00          | Peak              |
| 3  | * 2433.354      | 80.55          | 32.40      | 112.95               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

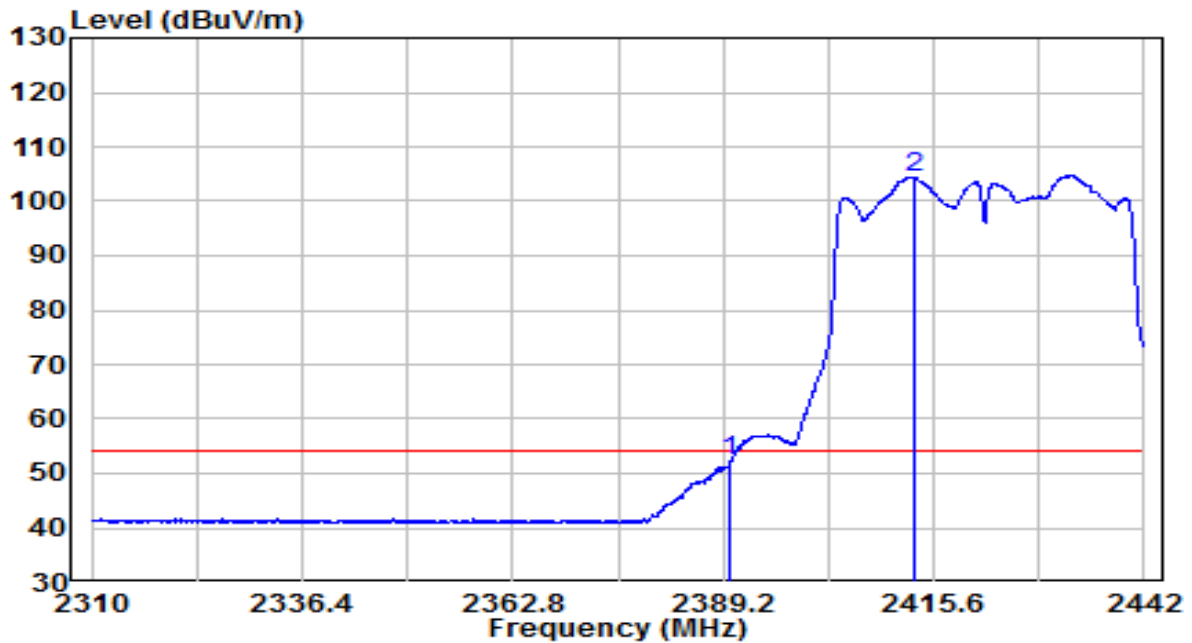


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 19.87          | 32.22      | 52.08                | -1.92       | 54.00          | Average           |
| 2  | * 2413.158      | 72.07          | 32.32      | 104.39               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

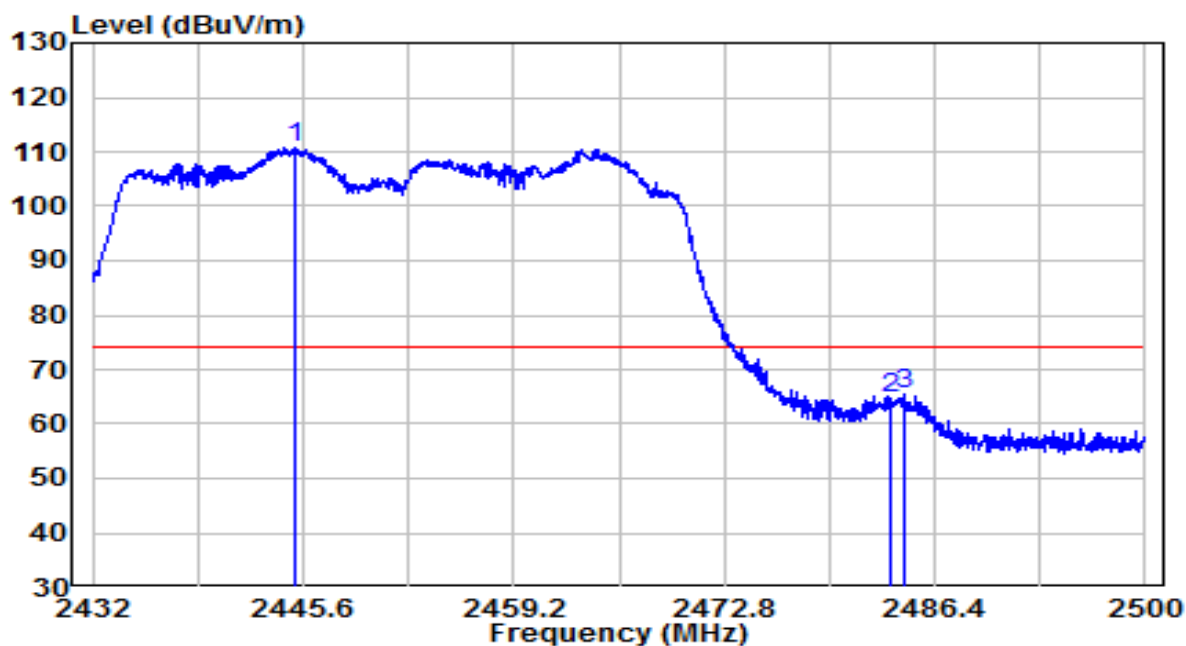


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2445.090        | 78.34          | 32.45      | 110.79               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 32.18          | 32.61      | 64.79                | -9.21       | 74.00          | Peak              |
| 3  |   | 2484.394        | 32.73          | 32.61      | 65.35                | -8.65       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

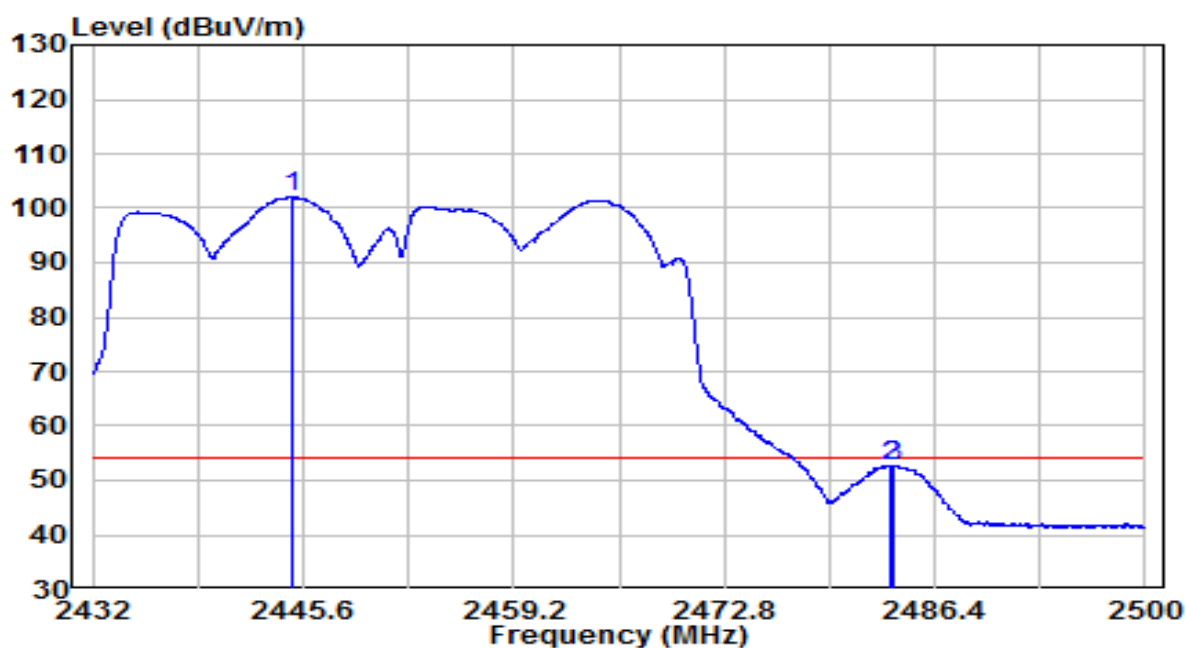


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2444.886        | 69.61          | 32.45      | 102.06               | N/A         | N/A            | Average           |
| 2  |   | 2483.500        | 19.98          | 32.61      | 52.59                | -1.41       | 54.00          | Average           |
| 3  |   | 2483.714        | 20.07          | 32.61      | 52.68                | -1.32       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

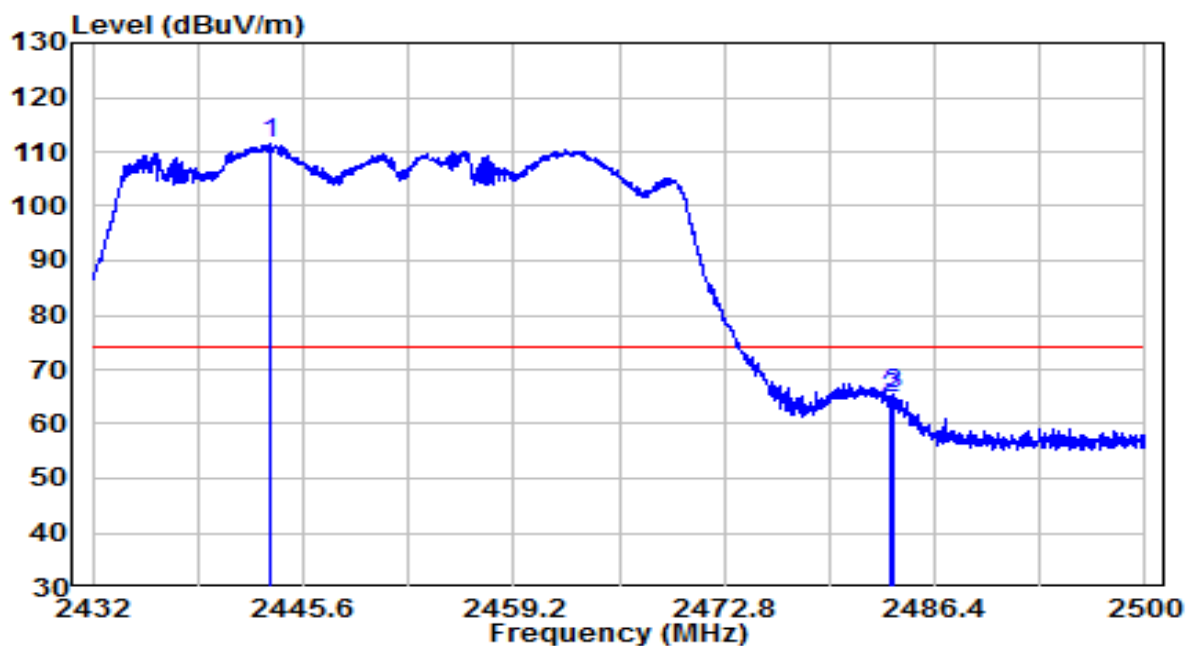


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2443.424        | 79.21          | 32.44      | 111.66               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 32.22          | 32.61      | 64.83                | -9.17       | 74.00          | Peak              |
| 3  |   | 2483.714        | 32.92          | 32.61      | 65.53                | -8.47       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

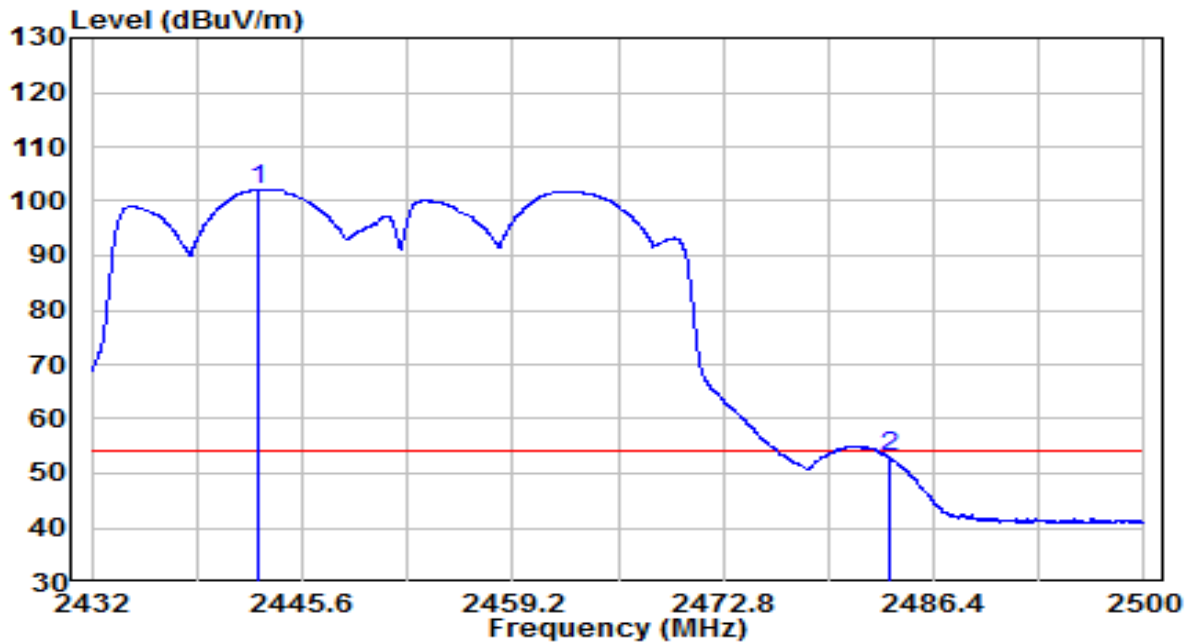


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2442.812        | 69.78          | 32.44      | 102.22               | N/A         | N/A            | Average           |
| 2  |   | 2483.500        | 20.23          | 32.61      | 52.84                | -1.16       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

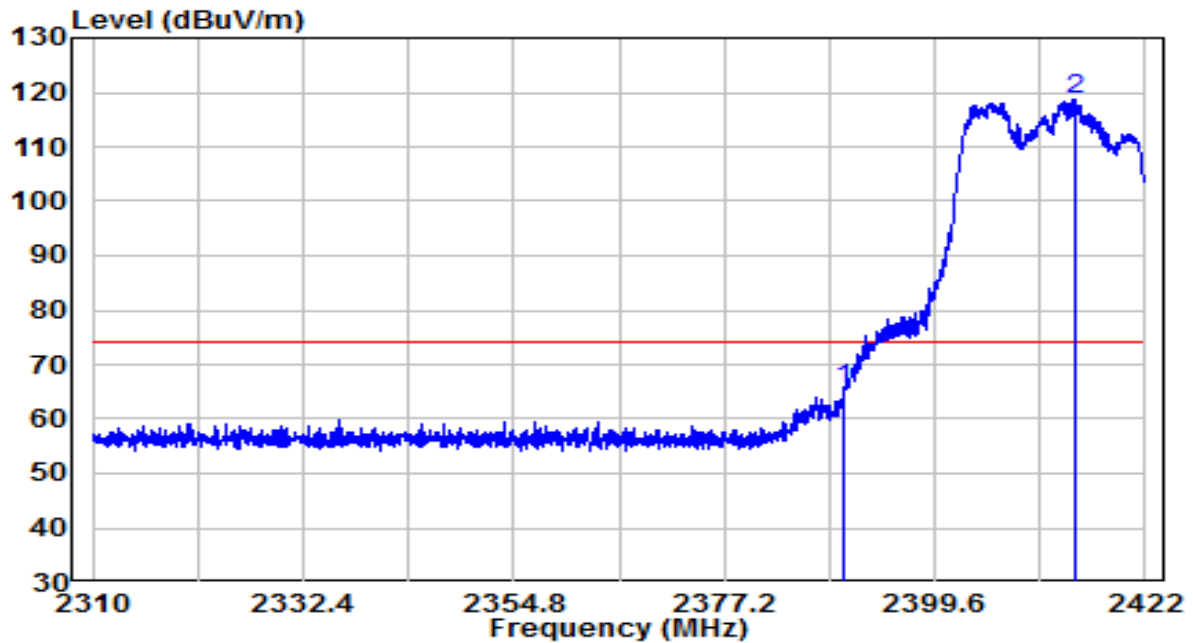


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 33.33          | 32.22      | 65.55                | -8.45       | 74.00          | Peak              |
| 2  | * 2414.552      | 86.28          | 32.32      | 118.60               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

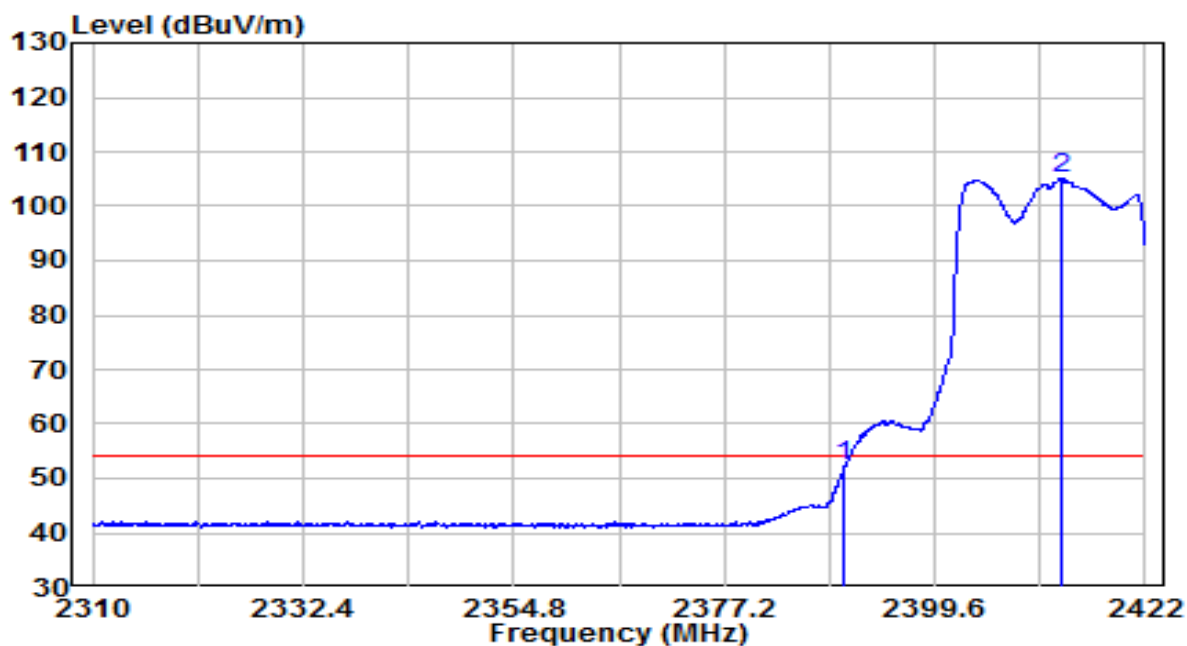


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2390.000        | 20.00          | 32.22      | 52.22                | -1.78       | 54.00          | Average           |
| 2  | * | 2413.152        | 72.69          | 32.32      | 105.00               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

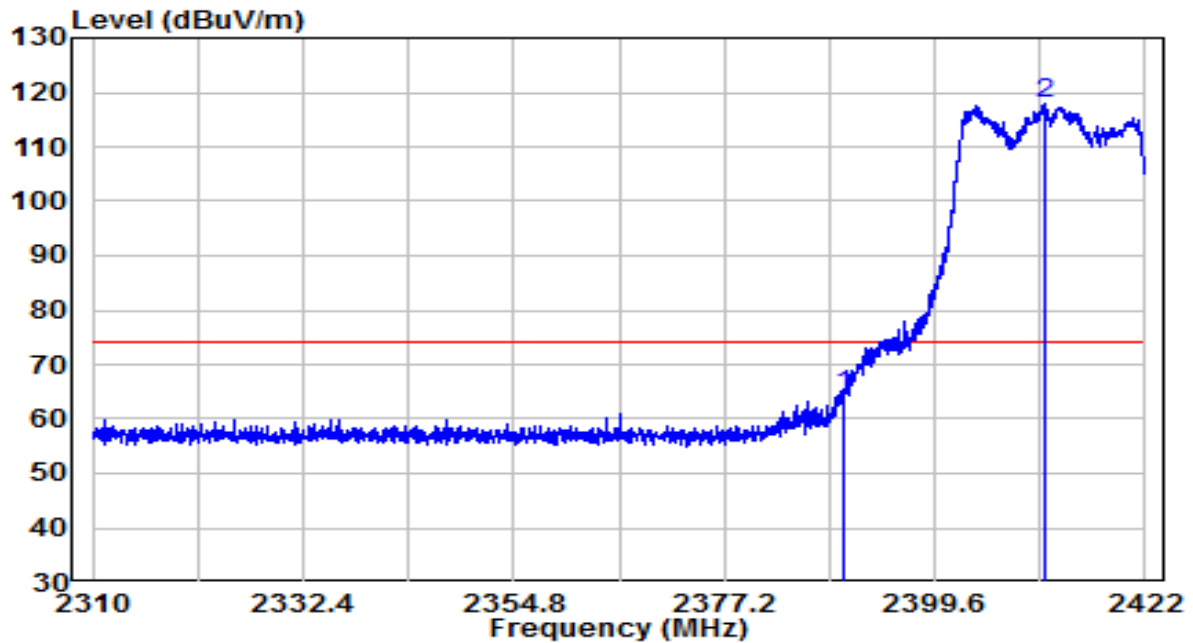


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 32.16          | 32.22      | 64.37                | -9.63       | 74.00          | Peak              |
| 2  | * 2411.360      | 85.45          | 32.31      | 117.76               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

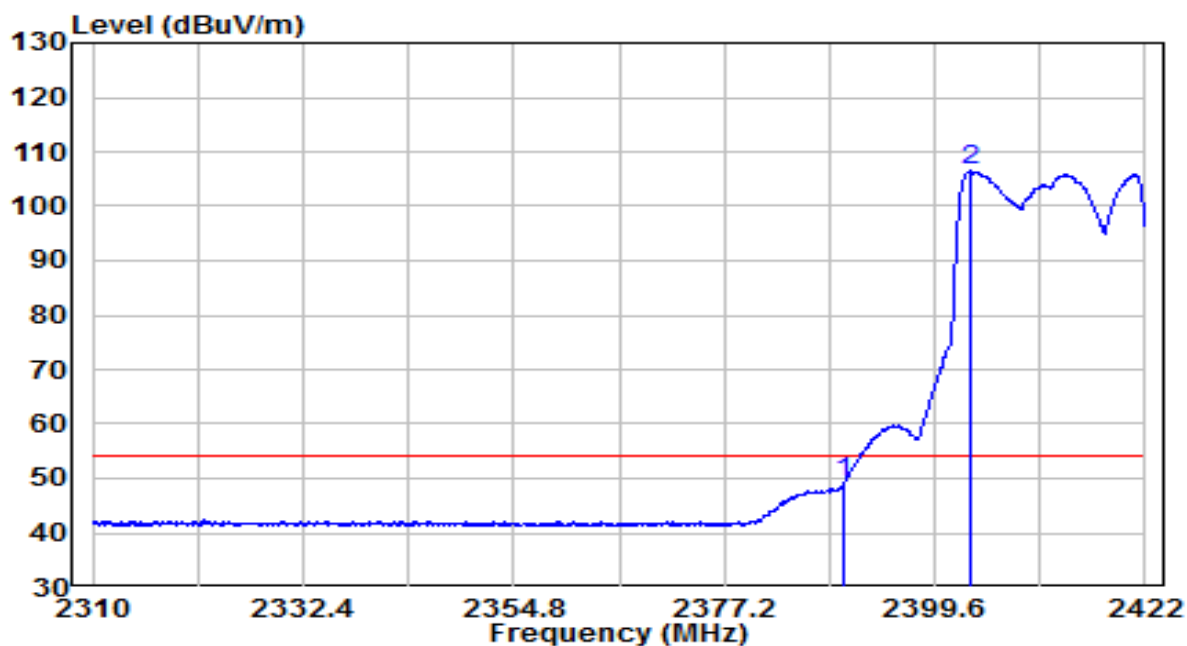


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 17.04          | 32.22      | 49.26                | -4.74       | 54.00          | Average           |
| 2  | * 2403.464      | 74.15          | 32.27      | 106.42               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

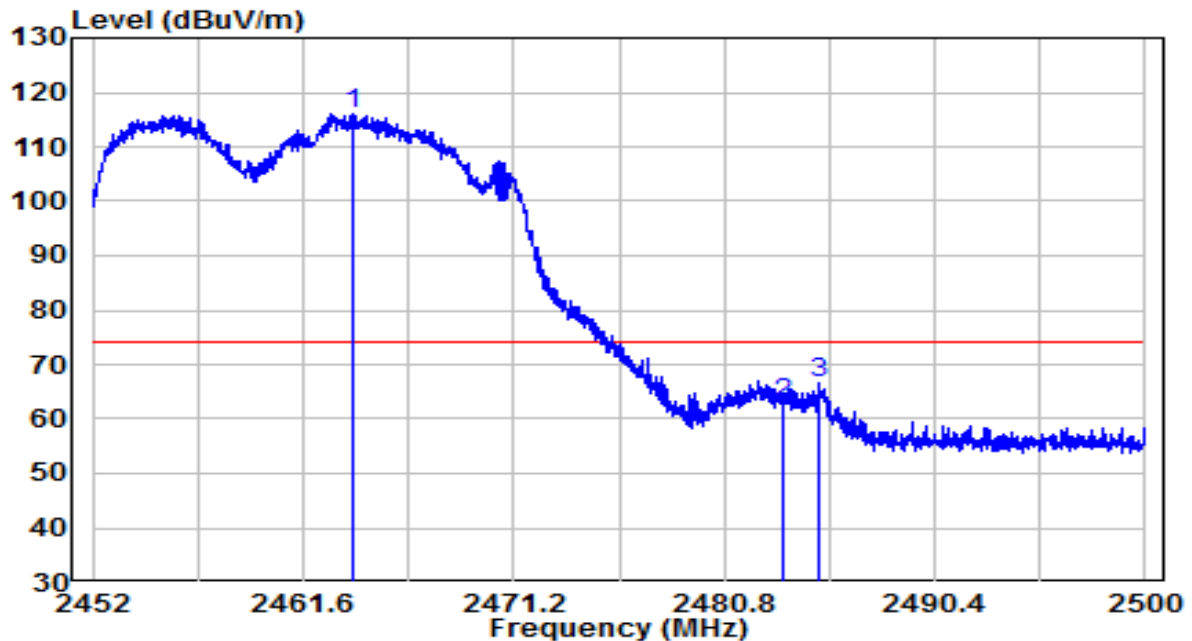


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2463.880        | 83.64          | 32.53      | 116.16               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 30.28          | 32.61      | 62.89                | -11.11      | 74.00          | Peak              |
| 3  |   | 2485.144        | 33.82          | 32.62      | 66.44                | -7.56       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

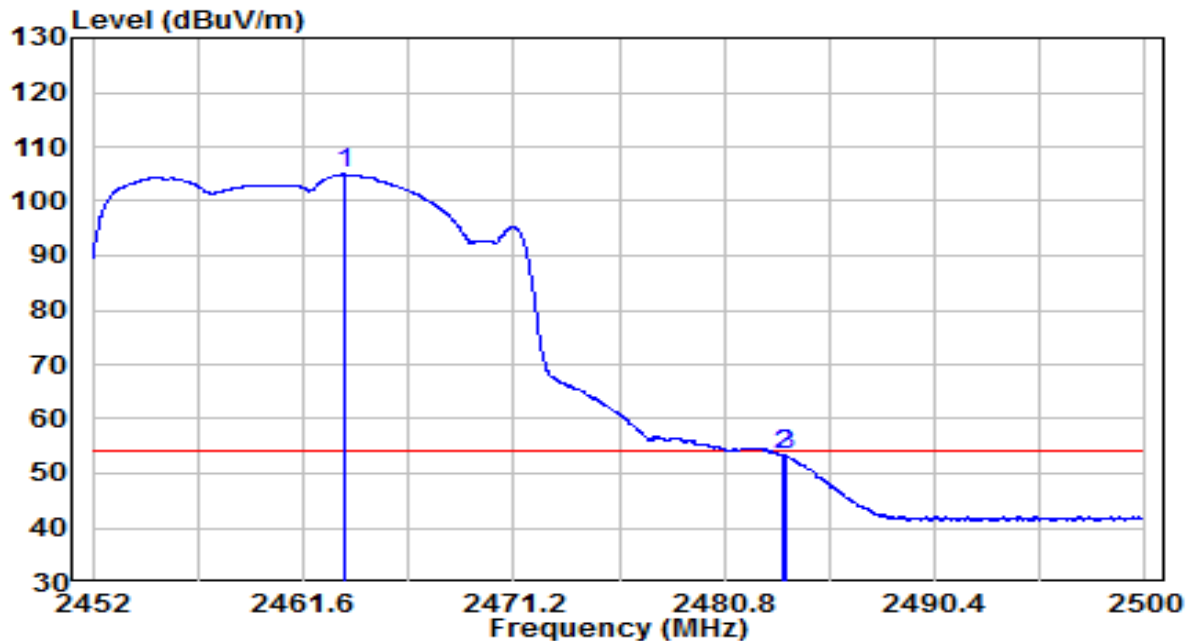


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2463.448        | 72.41          | 32.53      | 104.93               | N/A         | N/A            | Average           |
| 2  |   | 2483.500        | 20.72          | 32.61      | 53.33                | -0.67       | 54.00          | Average           |
| 3  |   | 2483.560        | 20.82          | 32.61      | 53.43                | -0.57       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

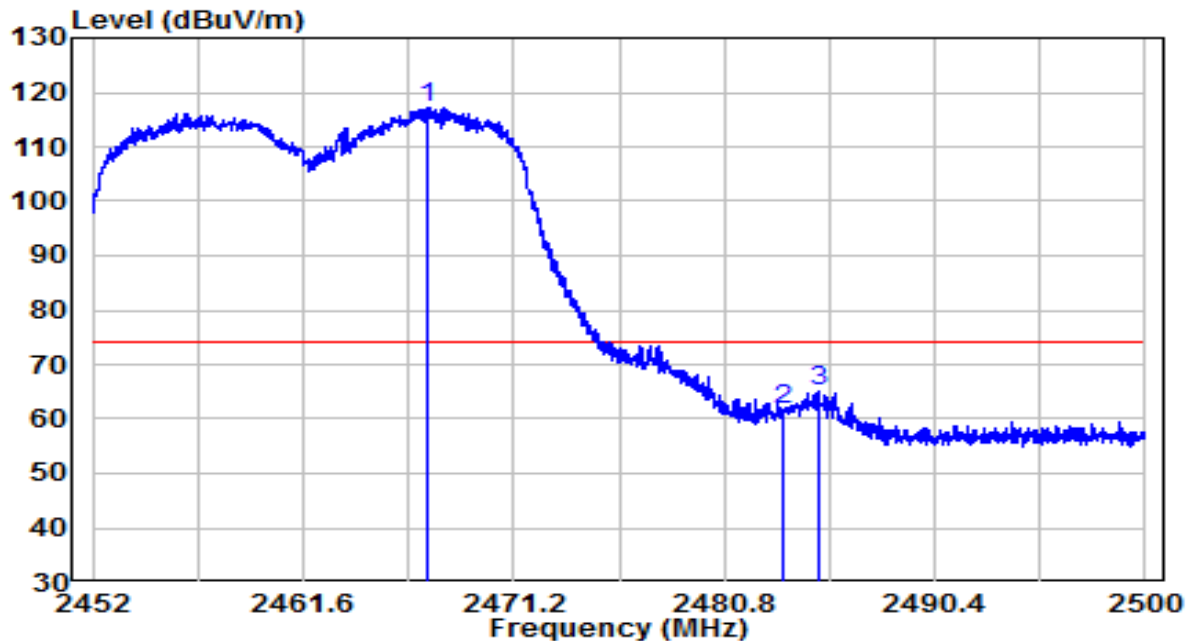


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2467.264        | 84.69          | 32.54      | 117.23               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 29.05          | 32.61      | 61.66                | -12.34      | 74.00          | Peak              |
| 3  |   | 2485.120        | 32.34          | 32.62      | 64.96                | -9.04       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

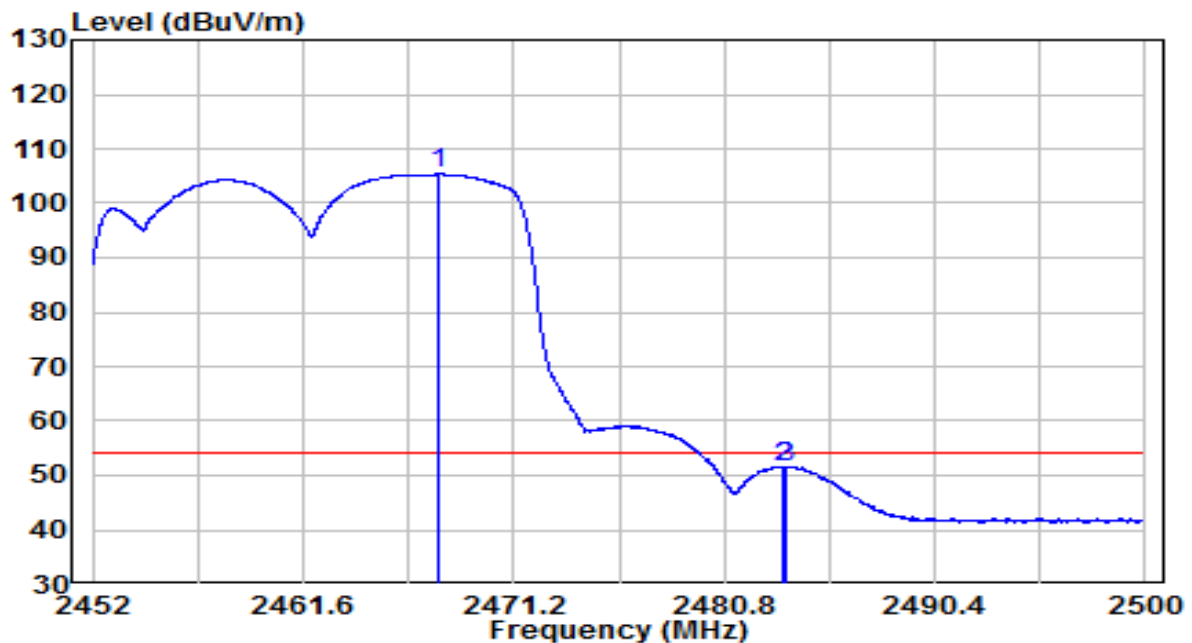


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2467.816        | 72.77          | 32.54      | 105.32               | N/A         | N/A            | Average           |
| 2  |   | 2483.500        | 18.99          | 32.61      | 51.60                | -2.40       | 54.00          | Average           |
| 3  |   | 2483.608        | 19.04          | 32.61      | 51.65                | -2.35       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

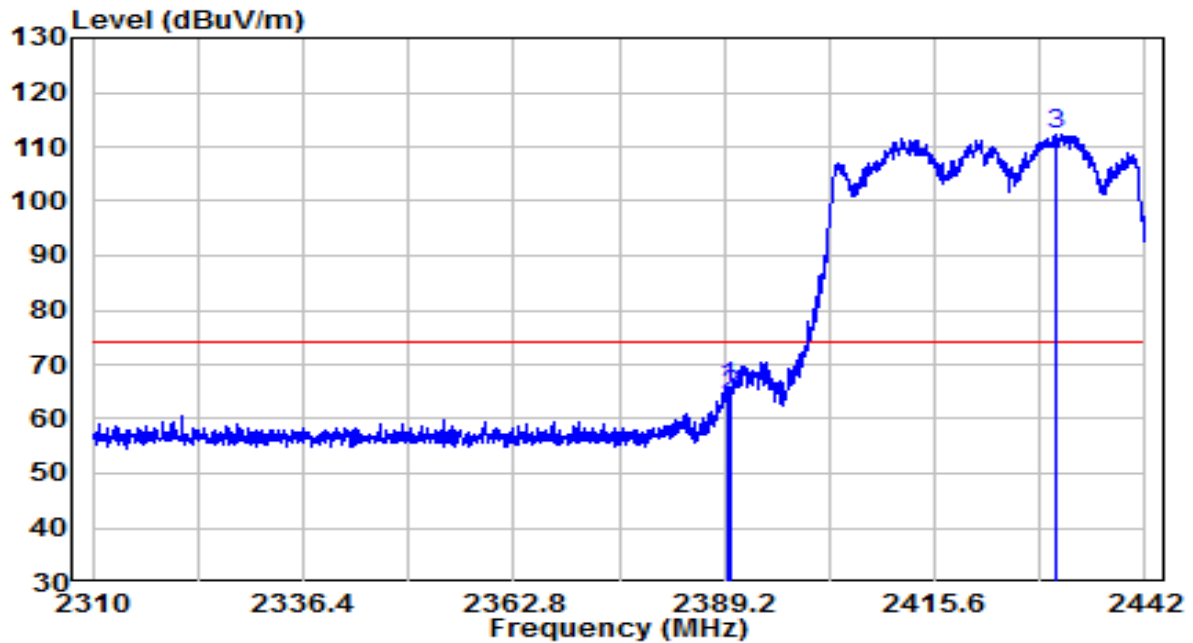


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.530        | 33.47          | 32.22      | 65.69                | -8.31       | 74.00          | Peak              |
| 2  | 2390.000        | 32.13          | 32.22      | 64.35                | -9.65       | 74.00          | Peak              |
| 3  | * 2430.846      | 79.87          | 32.39      | 112.26               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

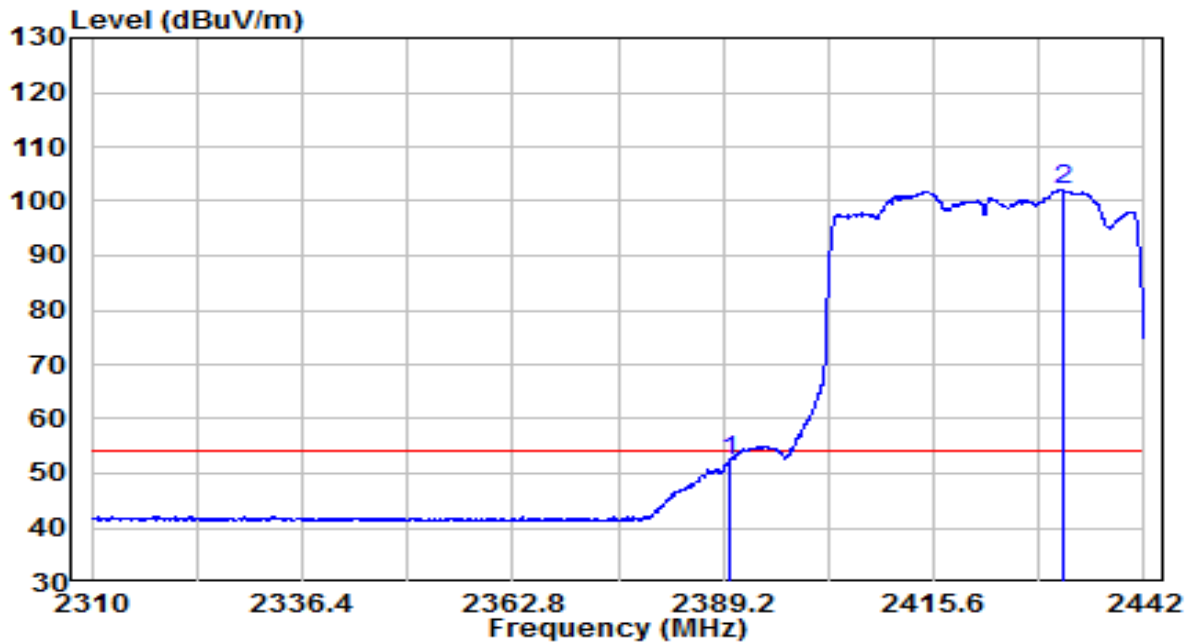


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 20.13          | 32.22      | 52.34                | -1.66       | 54.00          | Average           |
| 2  | * 2431.704      | 69.69          | 32.39      | 102.08               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

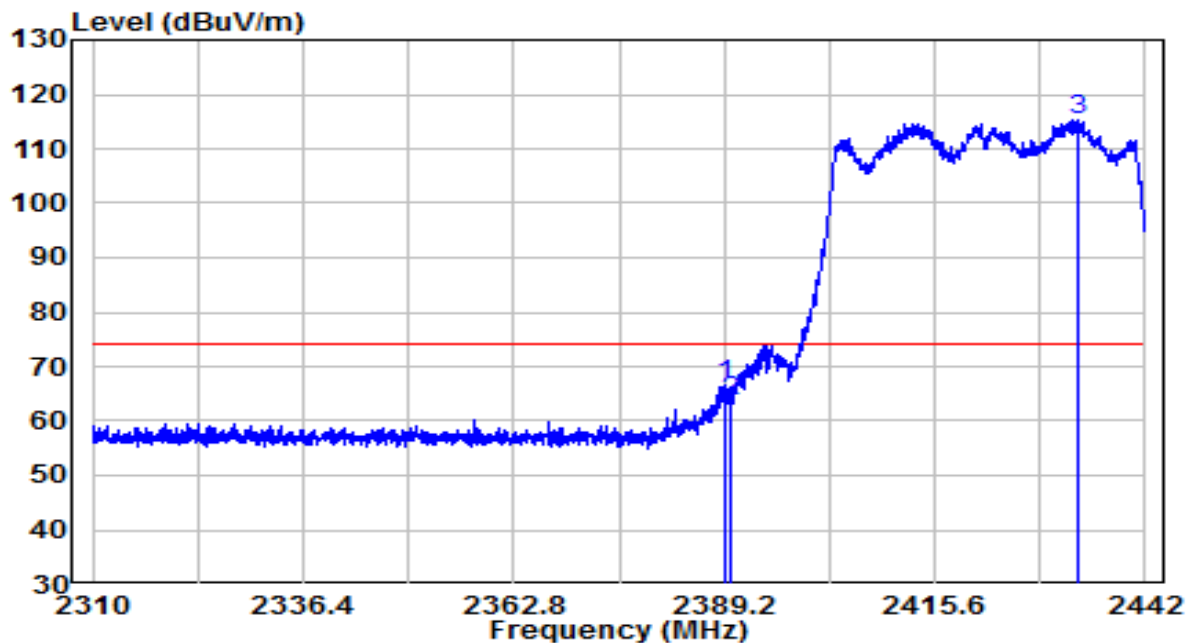


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.200        | 34.52          | 32.21      | 66.73                | -7.27       | 74.00          | Peak              |
| 2  | 2390.000        | 31.22          | 32.22      | 63.44                | -10.56      | 74.00          | Peak              |
| 3  | * 2433.552      | 82.71          | 32.40      | 115.12               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

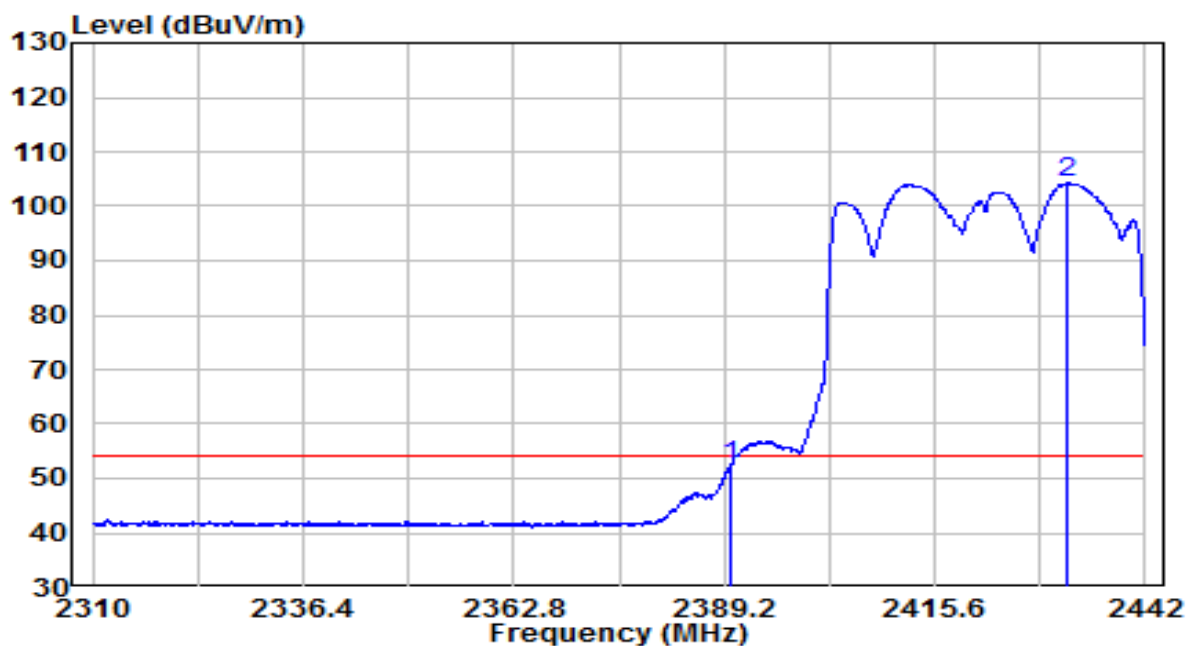


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 20.15          | 32.22      | 52.37                | -1.63       | 54.00          | Average           |
| 2  | * 2432.364      | 71.92          | 32.40      | 104.32               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

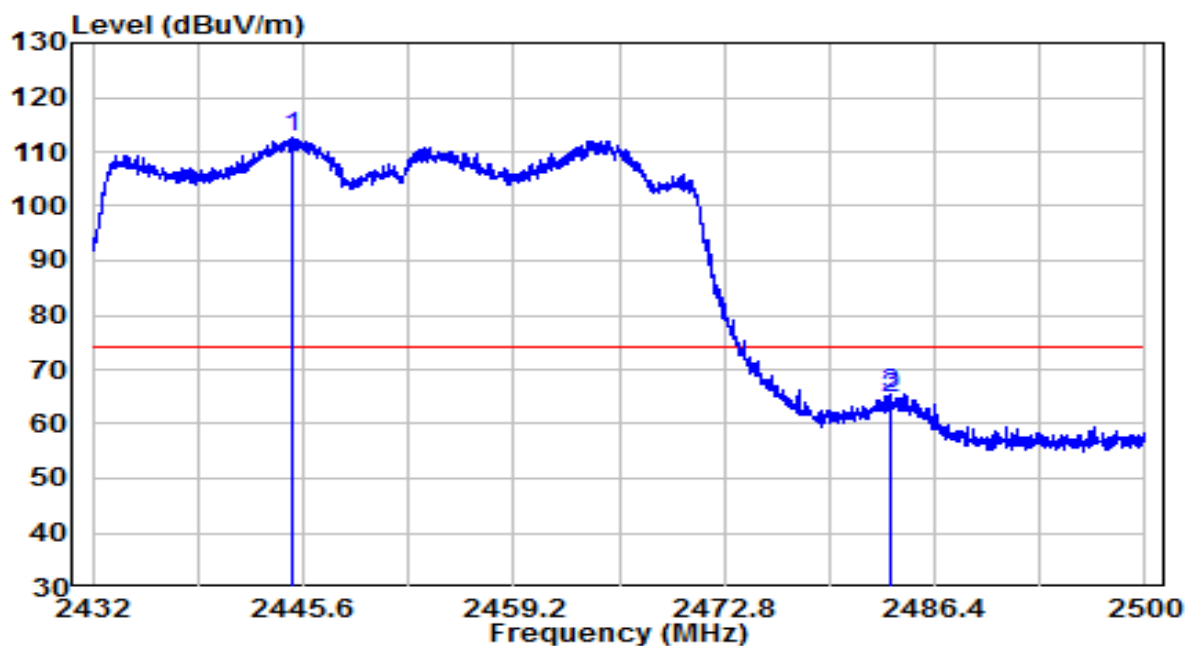


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2444.818        | 80.21          | 32.45      | 112.66               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 32.04          | 32.61      | 64.65                | -9.35       | 74.00          | Peak              |
| 3  |   | 2483.612        | 32.77          | 32.61      | 65.38                | -8.62       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

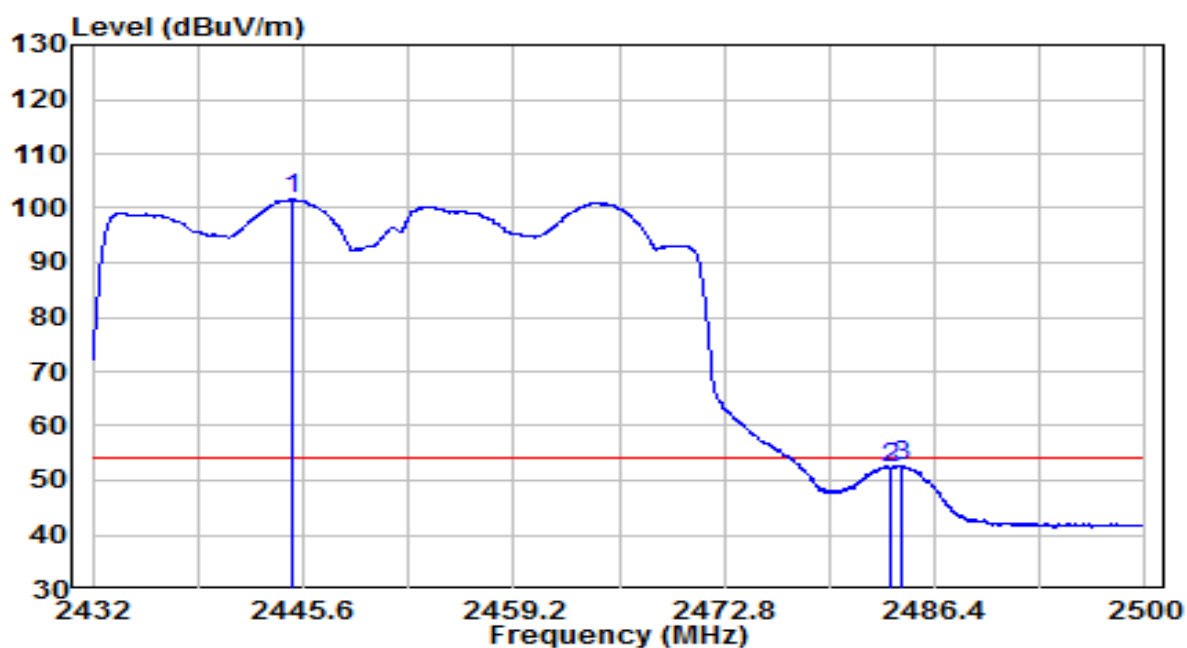


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2444.818        | 69.14          | 32.45      | 101.59               | N/A         | N/A            | Average           |
| 2  |   | 2483.500        | 19.66          | 32.61      | 52.27                | -1.73       | 54.00          | Average           |
| 3  |   | 2484.224        | 20.12          | 32.61      | 52.74                | -1.26       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

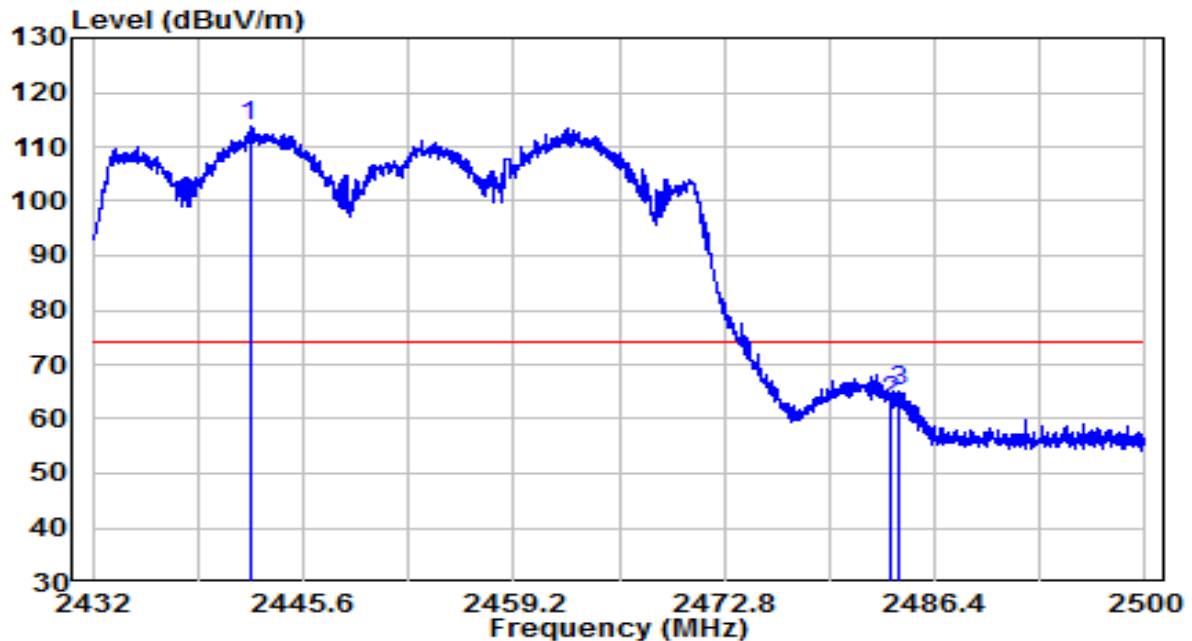


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2442.132        | 81.16          | 32.44      | 113.59               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 30.43          | 32.61      | 63.04                | -10.96      | 74.00          | Peak              |
| 3  |   | 2484.122        | 32.60          | 32.61      | 65.22                | -8.78       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2021-12-28    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

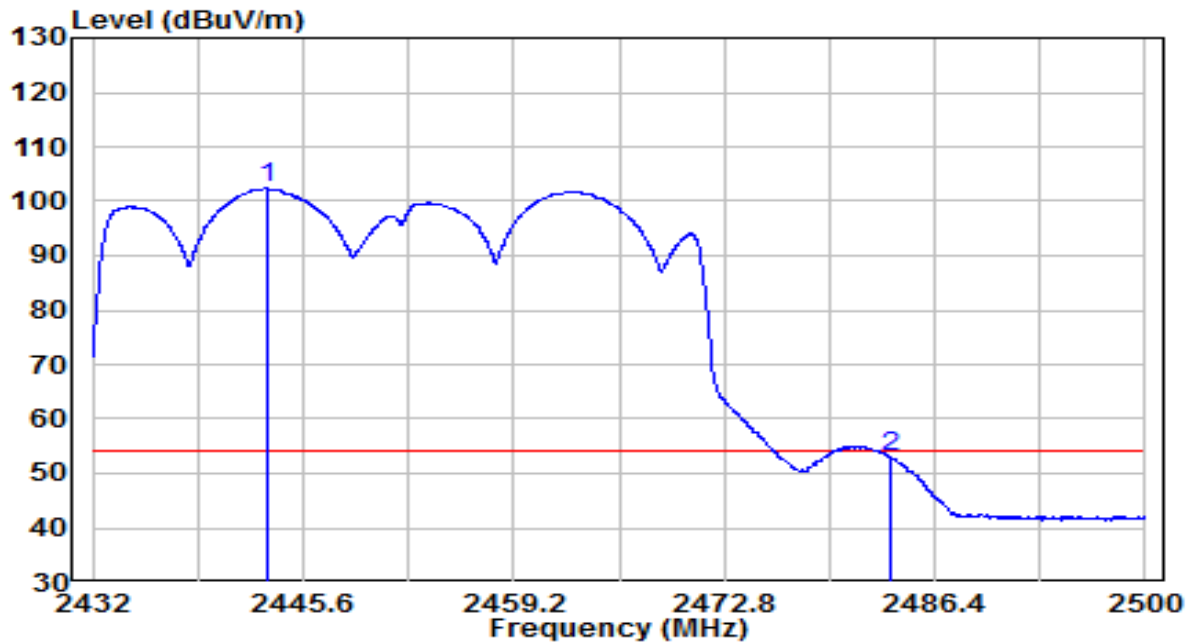


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2443.356        | 70.00          | 32.44      | 102.45               | N/A         | N/A            | Average           |
| 2  |   | 2483.500        | 20.46          | 32.61      | 53.07                | -0.93       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

### Filter Configuration 2#

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

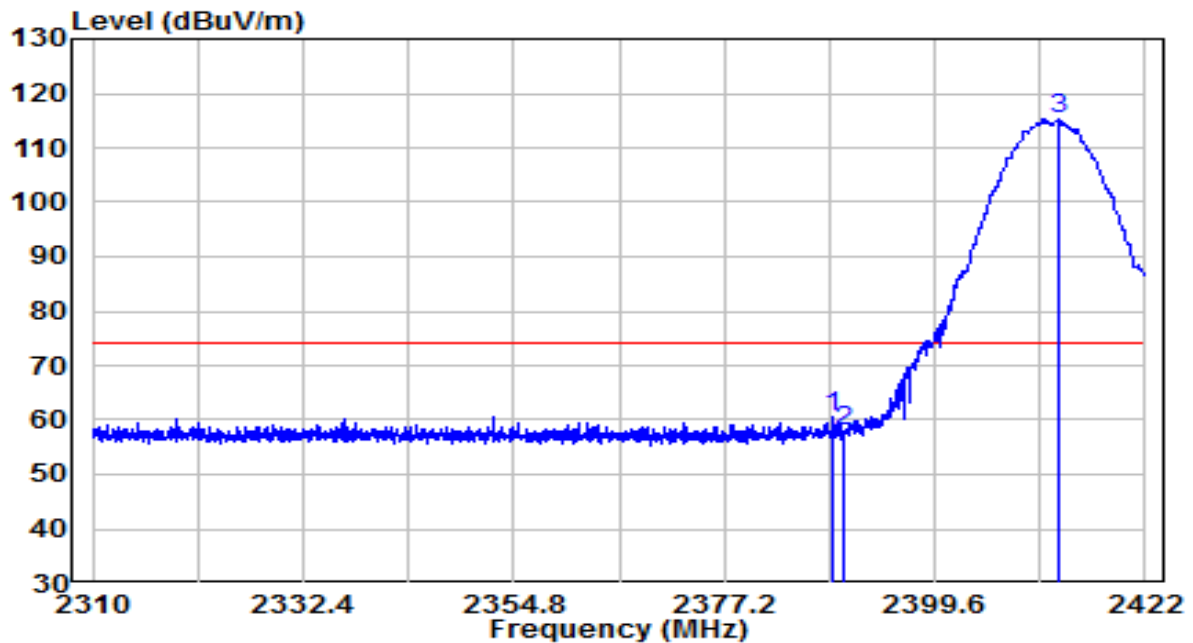


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2388.792        | 28.50          | 32.21      | 60.71                | -13.29      | 74.00          | Peak              |
| 2  | 2390.000        | 25.72          | 32.22      | 57.94                | -16.06      | 74.00          | Peak              |
| 3  | * 2412.872      | 82.88          | 32.31      | 115.19               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

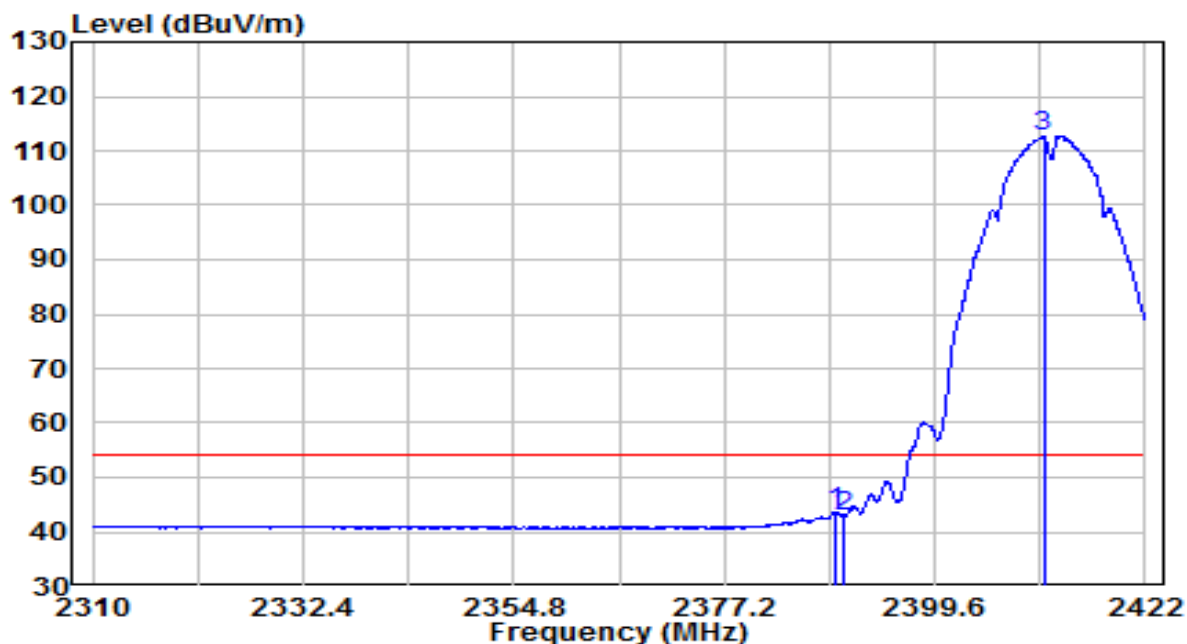


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.016        | 11.42          | 32.21      | 43.64                | -10.36      | 54.00          | Average           |
| 2  | 2390.000        | 10.63          | 32.22      | 42.85                | -11.15      | 54.00          | Average           |
| 3  | * 2411.192      | 80.45          | 32.31      | 112.76               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

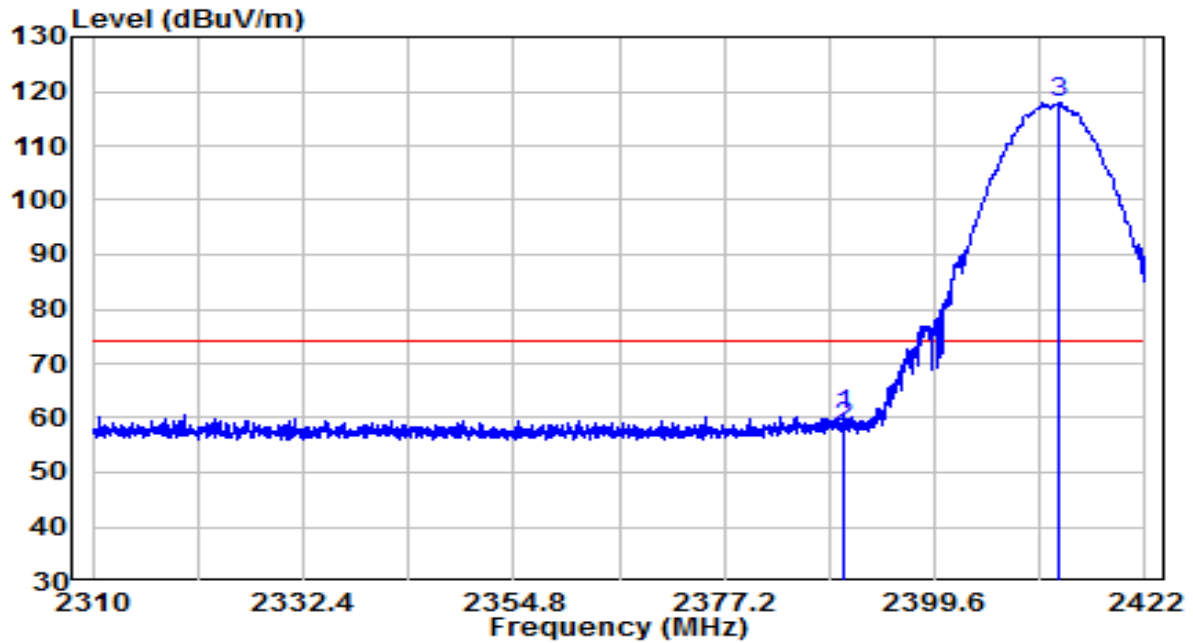


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.856        | 28.18          | 32.22      | 60.40                | -13.60      | 74.00          | Peak              |
| 2  | 2390.000        | 26.03          | 32.22      | 58.25                | -15.75      | 74.00          | Peak              |
| 3  | * 2412.872      | 85.67          | 32.31      | 117.98               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

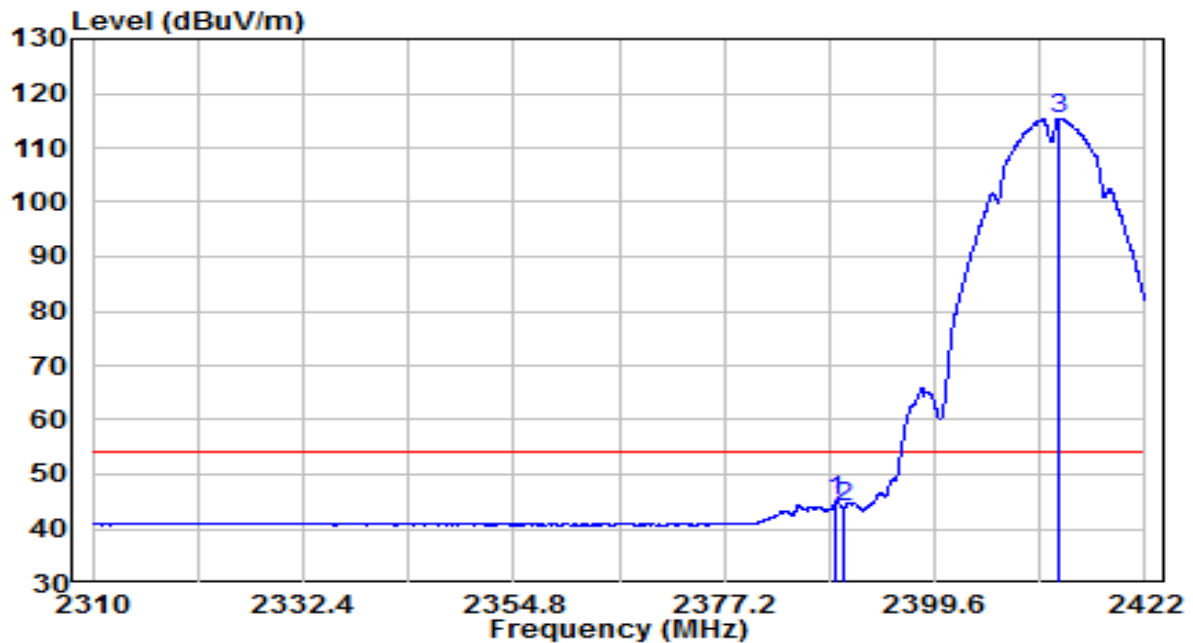


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.128        | 12.71          | 32.21      | 44.92                | -9.08       | 54.00          | Average           |
| 2  | 2390.000        | 11.80          | 32.22      | 44.02                | -9.98       | 54.00          | Average           |
| 3  | * 2412.704      | 83.13          | 32.31      | 115.44               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

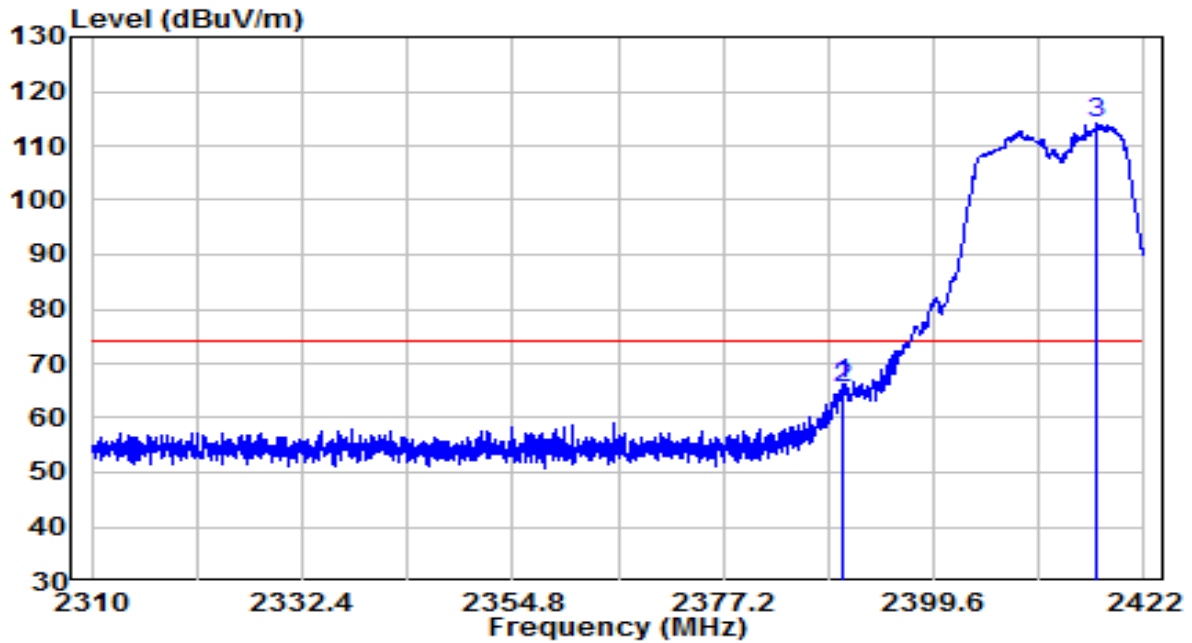


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.968        | 33.86          | 32.22      | 66.07                | -7.93       | 74.00          | Peak              |
| 2  | 2390.000        | 33.19          | 32.22      | 65.41                | -8.59       | 74.00          | Peak              |
| 3  | * 2417.016      | 81.68          | 32.33      | 114.01               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

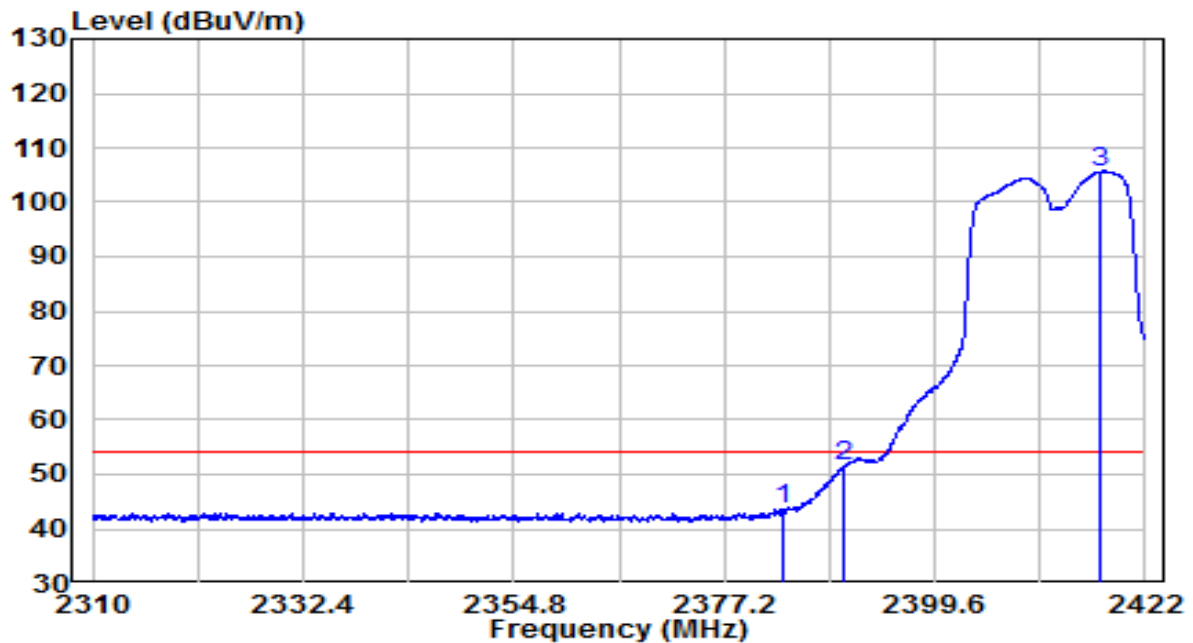


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2383.528        | 11.49          | 32.19      | 43.68                | -10.32      | 54.00          | Average           |
| 2  | 2390.000        | 19.33          | 32.22      | 51.55                | -2.45       | 54.00          | Average           |
| 3  | * 2417.296      | 73.29          | 32.33      | 105.63               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

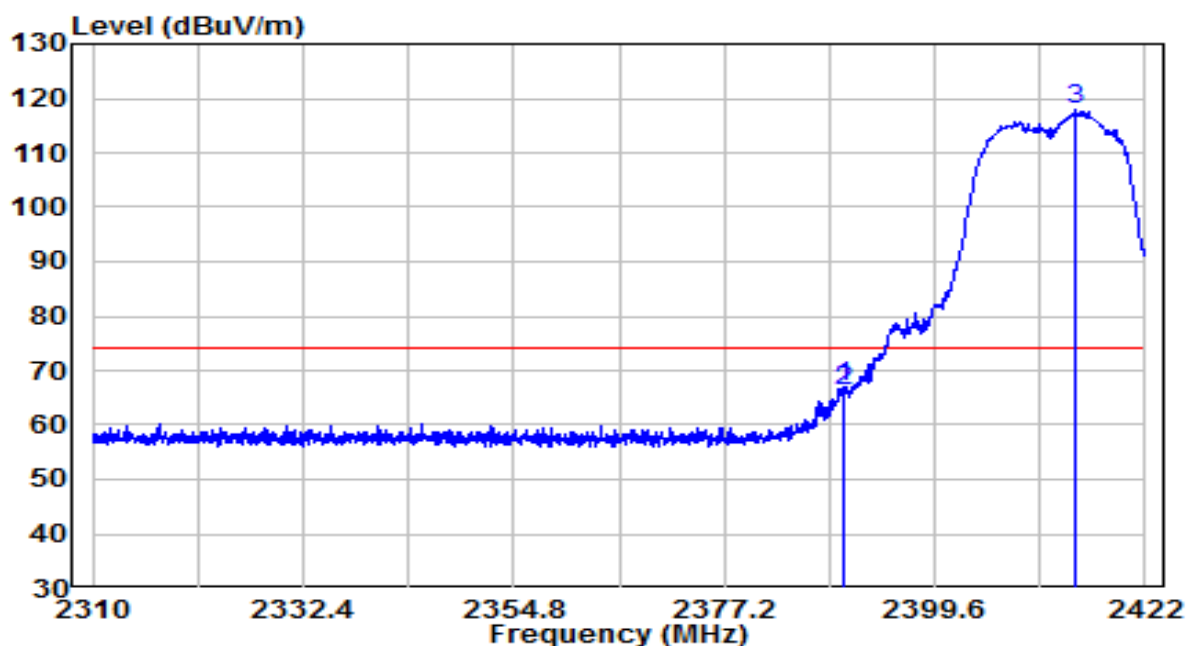


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.800        | 34.70          | 32.22      | 66.91                | -7.09       | 74.00          | Peak              |
| 2  | 2390.000        | 34.17          | 32.22      | 66.38                | -7.62       | 74.00          | Peak              |
| 3  | * 2414.608      | 85.49          | 32.32      | 117.81               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

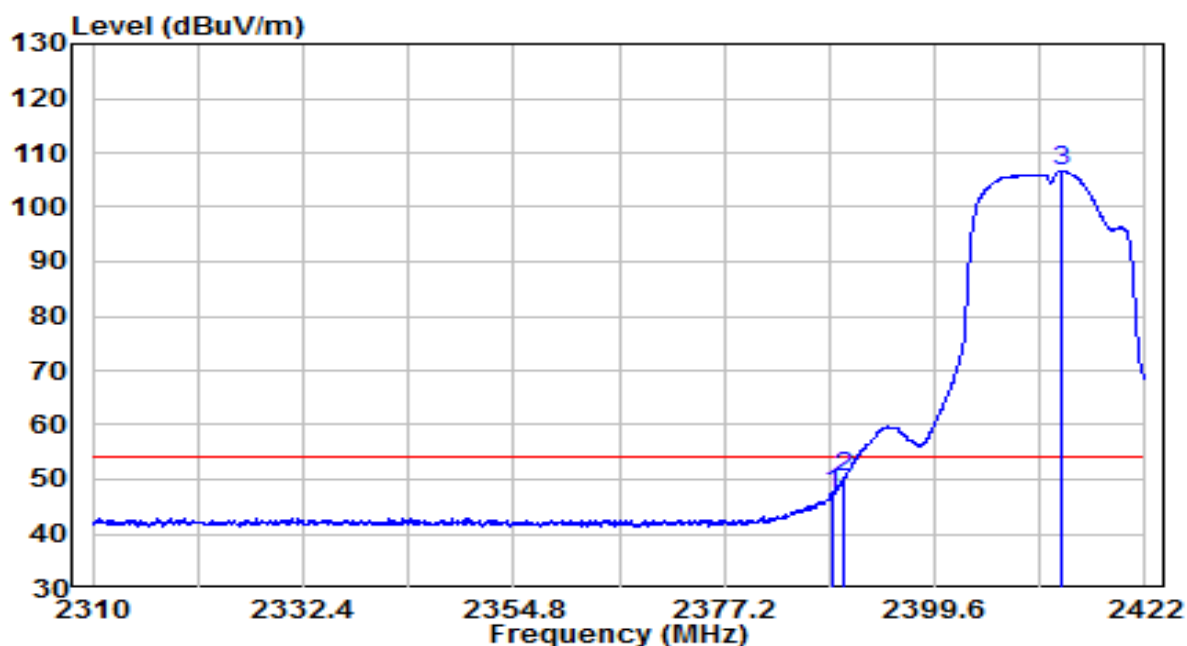


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2388.624        | 15.24          | 32.21      | 47.45                | -6.55       | 54.00          | Average           |
| 2  | 2390.000        | 18.13          | 32.22      | 50.35                | -3.65       | 54.00          | Average           |
| 3  | * 2413.152      | 74.30          | 32.32      | 106.62               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

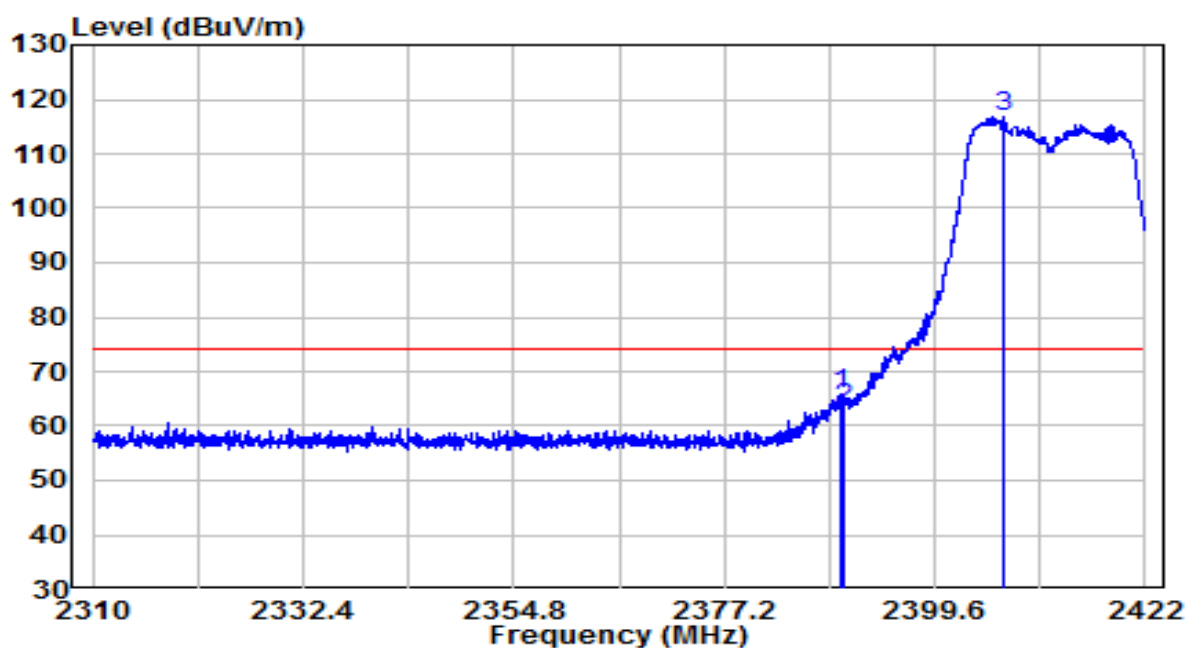


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.632        | 33.46          | 32.22      | 65.67                | -8.33       | 74.00          | Peak              |
| 2  | 2390.000        | 30.82          | 32.22      | 63.04                | -10.96      | 74.00          | Peak              |
| 3  | * 2407.048      | 84.48          | 32.29      | 116.76               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

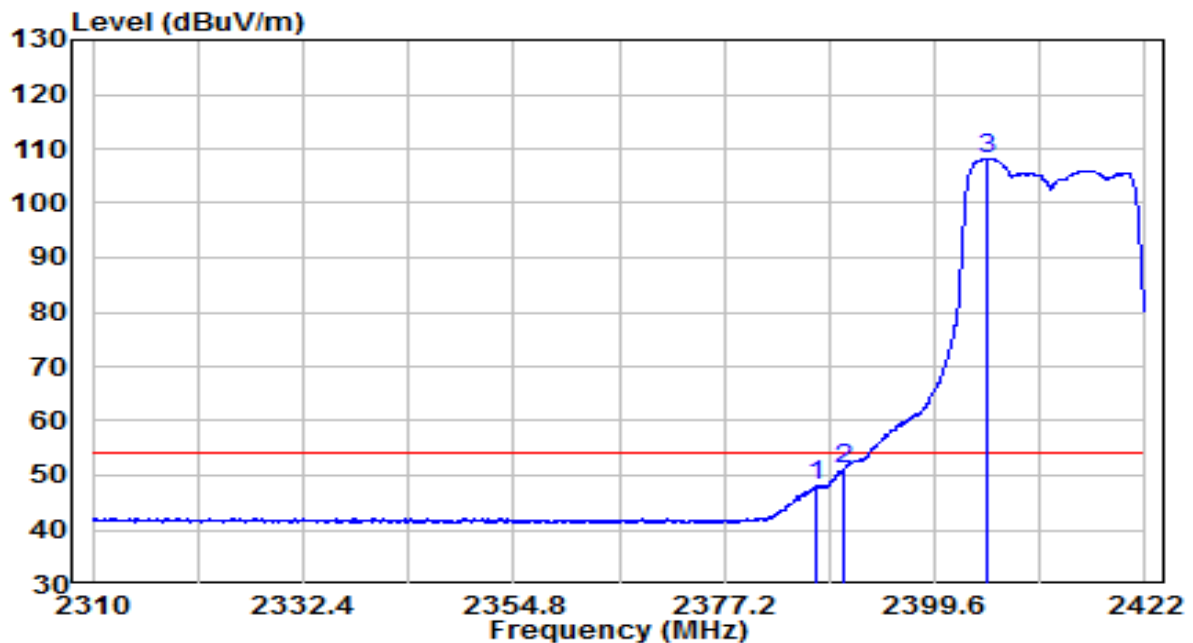


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2387.112        | 15.92          | 32.21      | 48.13                | -5.87       | 54.00          | Average           |
| 2  | 2390.000        | 18.96          | 32.22      | 51.18                | -2.82       | 54.00          | Average           |
| 3  | * 2405.088      | 75.93          | 32.28      | 108.21               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

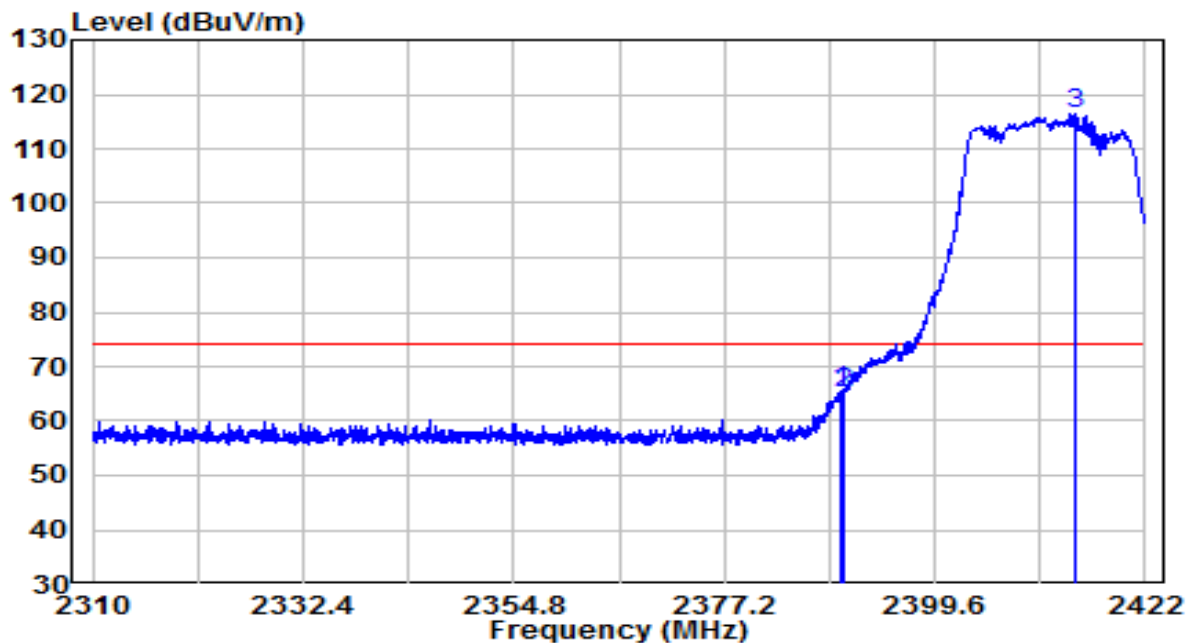


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.576        | 33.24          | 32.22      | 65.46                | -8.54       | 74.00          | Peak              |
| 2  | 2390.000        | 32.99          | 32.22      | 65.21                | -8.79       | 74.00          | Peak              |
| 3  | * 2414.440      | 84.14          | 32.32      | 116.46               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

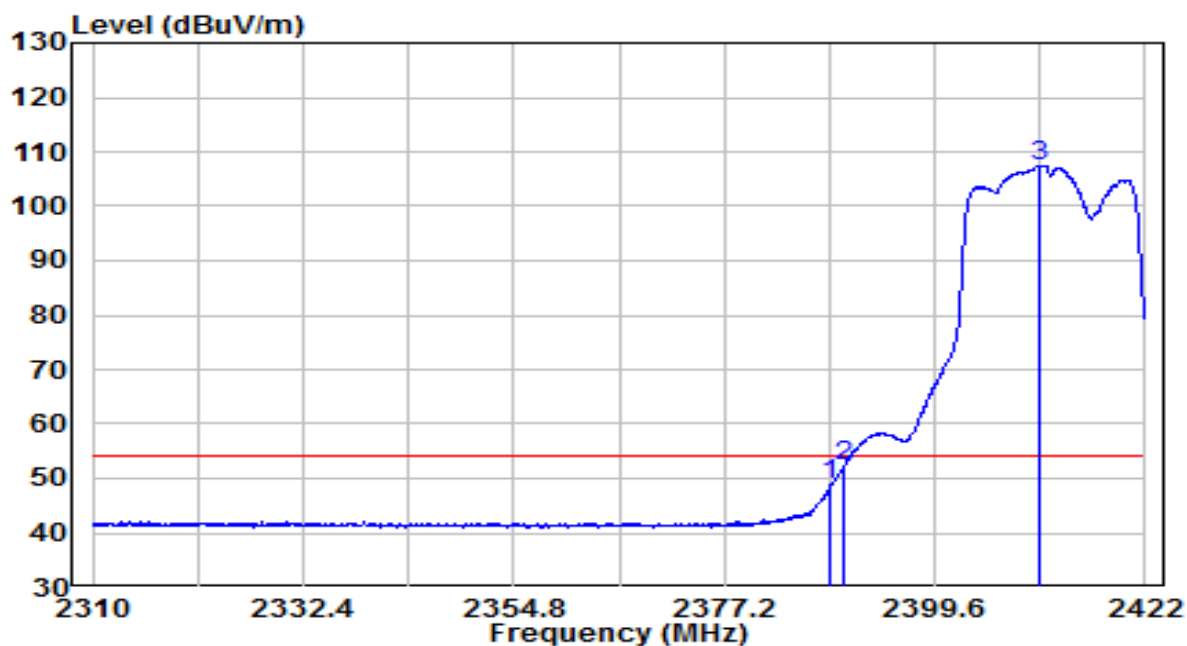


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2388.512        | 16.72          | 32.21      | 48.93                | -5.07       | 54.00          | Average           |
| 2  | 2390.000        | 19.96          | 32.22      | 52.18                | -1.82       | 54.00          | Average           |
| 3  | * 2410.688      | 75.16          | 32.30      | 107.47               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

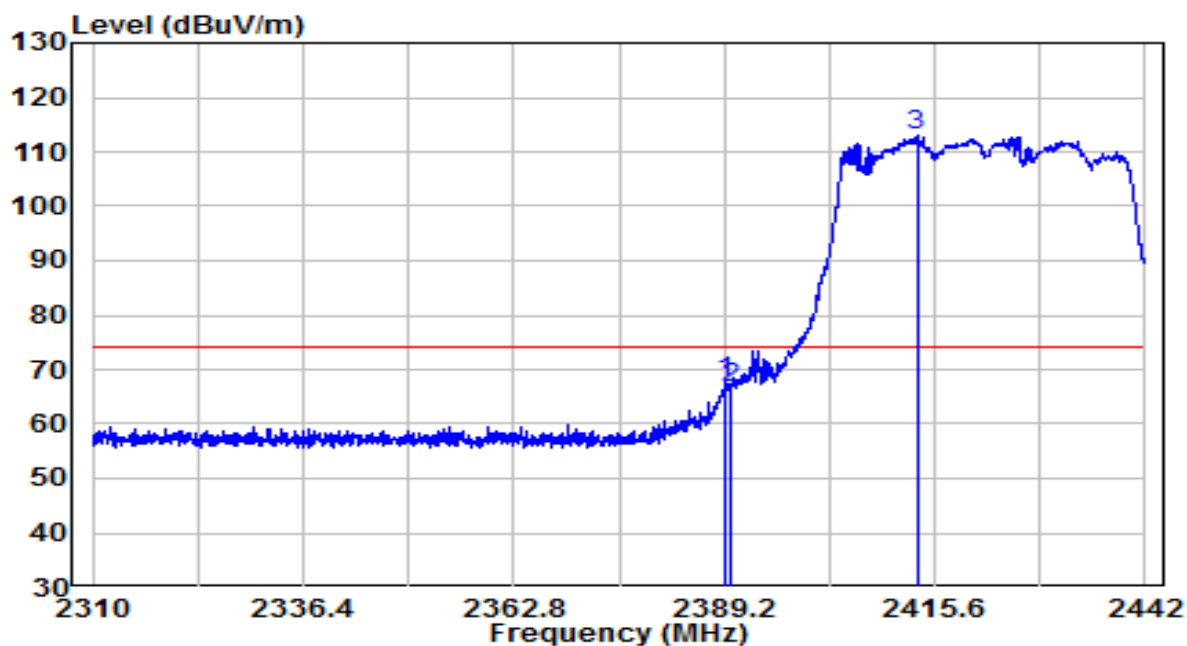


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.332        | 35.52          | 32.22      | 67.74                | -6.26       | 74.00          | Peak              |
| 2  | 2390.000        | 34.57          | 32.22      | 66.79                | -7.21       | 74.00          | Peak              |
| 3  | * 2413.356      | 80.70          | 32.32      | 113.02               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

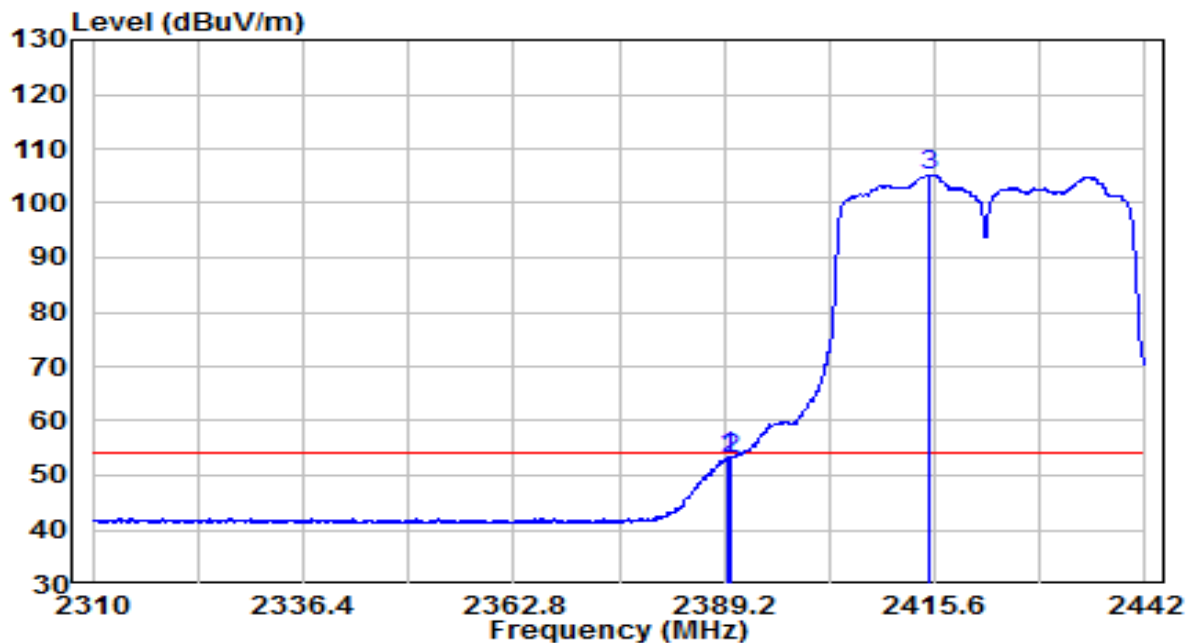


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.596        | 21.04          | 32.22      | 53.26                | -0.74       | 54.00          | Average           |
| 2  | 2390.000        | 20.98          | 32.22      | 53.20                | -0.80       | 54.00          | Average           |
| 3  | * 2414.940      | 72.94          | 32.32      | 105.26               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

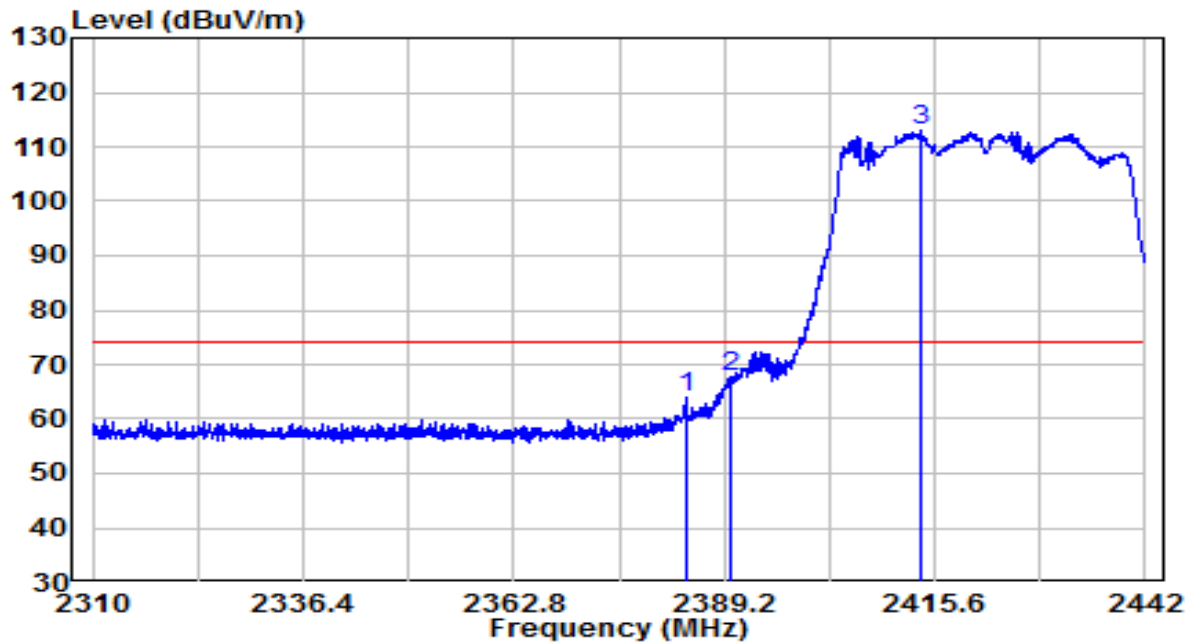


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2384.316        | 31.64          | 32.19      | 63.83                | -10.17      | 74.00          | Peak              |
| 2  | 2390.000        | 35.54          | 32.22      | 67.76                | -6.24       | 74.00          | Peak              |
| 3  | * 2413.884      | 80.60          | 32.32      | 112.91               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

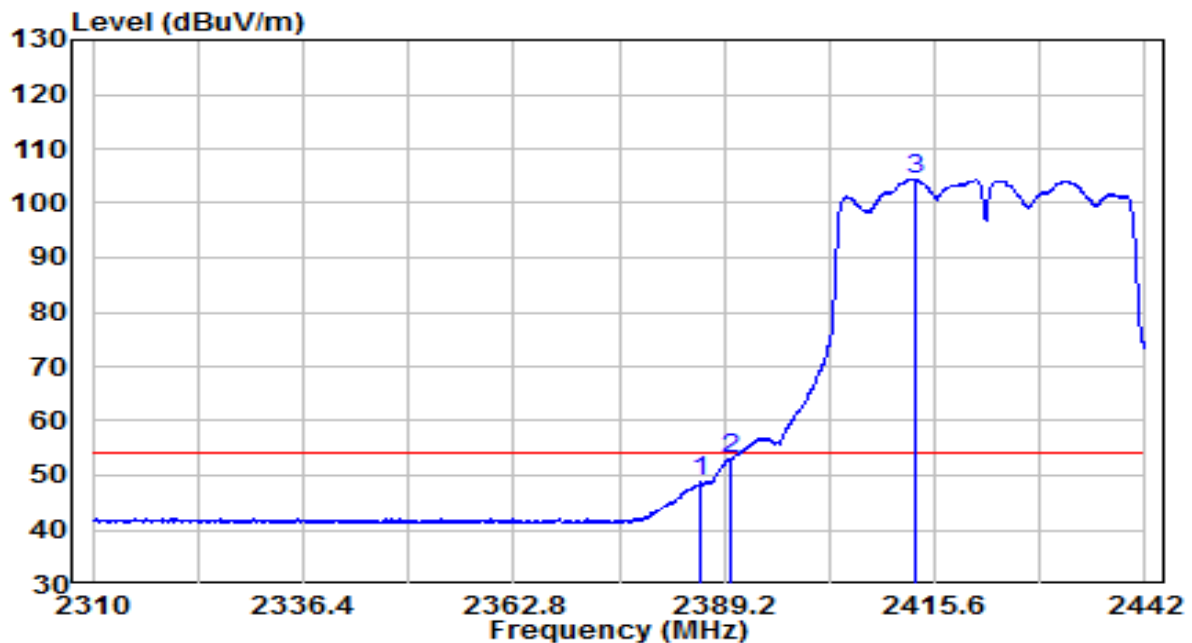


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2386.230        | 16.58          | 32.20      | 48.78                | -5.22       | 54.00          | Average           |
| 2  | 2390.000        | 20.84          | 32.22      | 53.06                | -0.94       | 54.00          | Average           |
| 3  | * 2413.026      | 71.98          | 32.31      | 104.29               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

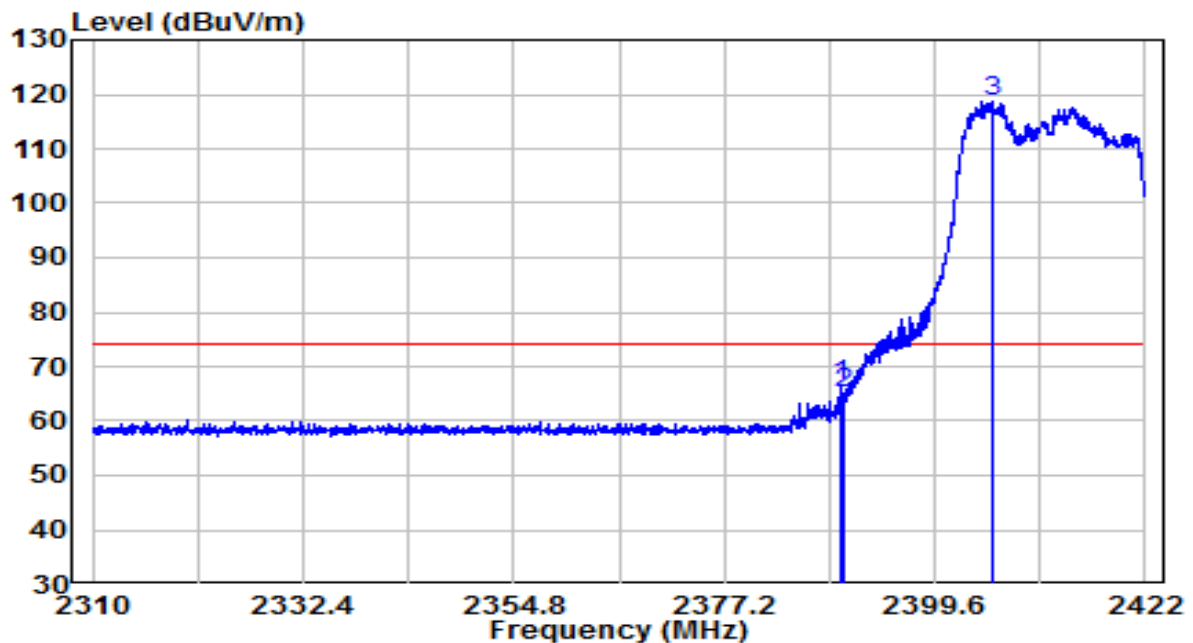


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.688        | 34.26          | 32.22      | 66.47                | -7.53       | 74.00          | Peak              |
| 2  | 2390.000        | 32.97          | 32.22      | 65.19                | -8.81       | 74.00          | Peak              |
| 3  | * 2405.760      | 86.36          | 32.28      | 118.64               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

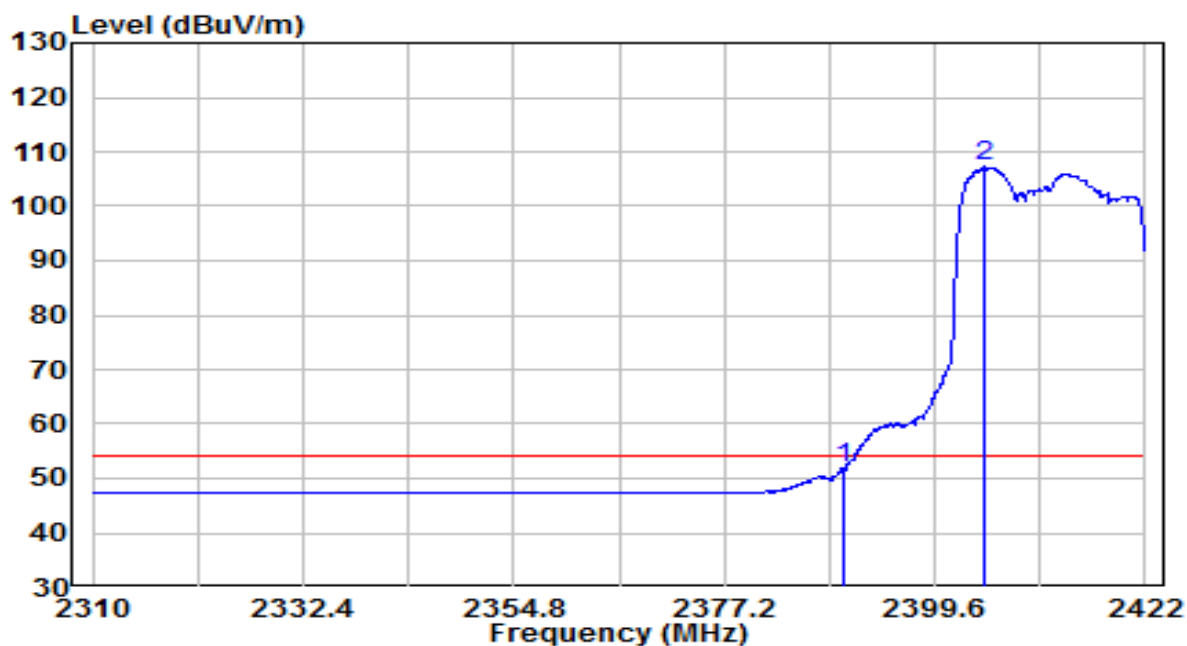


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 19.65          | 32.22      | 51.87                | -2.13       | 54.00          | Average           |
| 2  | * 2404.976      | 74.90          | 32.28      | 107.18               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

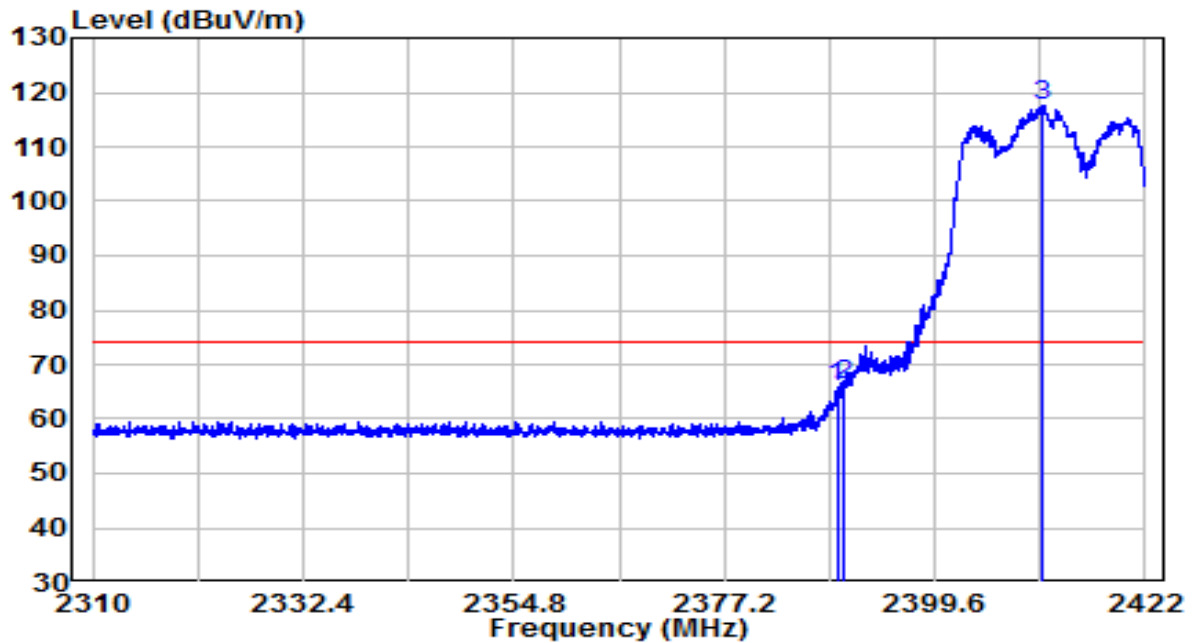


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.184        | 33.45          | 32.21      | 65.67                | -8.33       | 74.00          | Peak              |
| 2  | 2390.000        | 34.08          | 32.22      | 66.30                | -7.70       | 74.00          | Peak              |
| 3  | * 2410.968      | 85.31          | 32.31      | 117.62               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2412MHz | Test Voltage         | 120V/60Hz     |

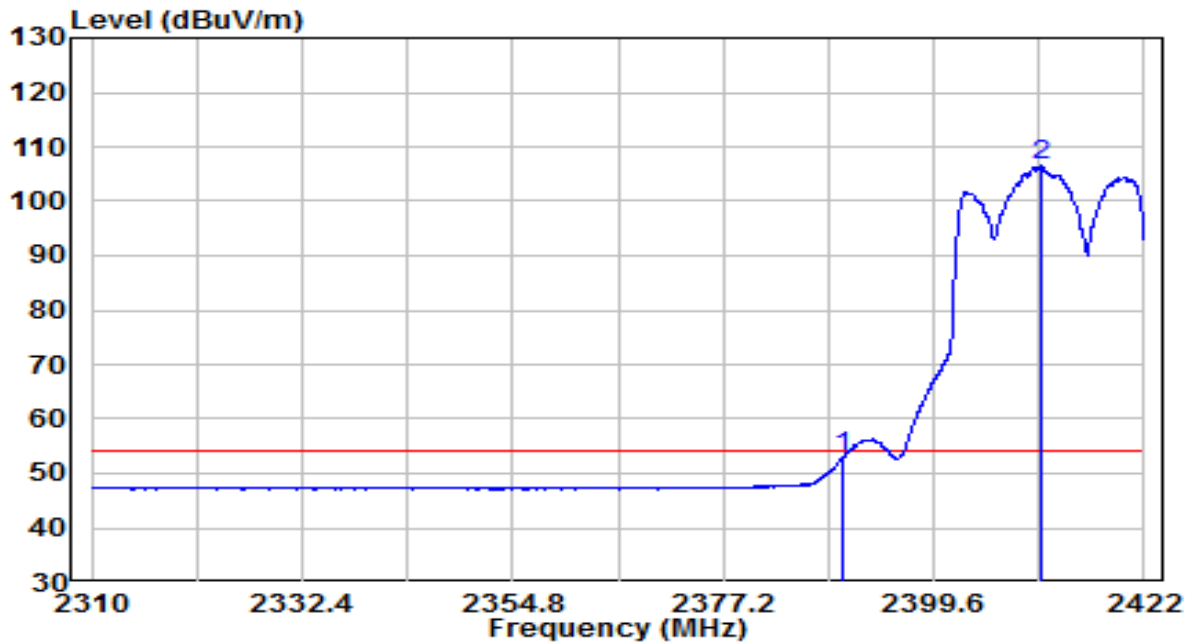


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 20.88          | 32.22      | 53.10                | -0.90       | 54.00          | Average           |
| 2  | * 2411.080      | 74.17          | 32.31      | 106.47               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

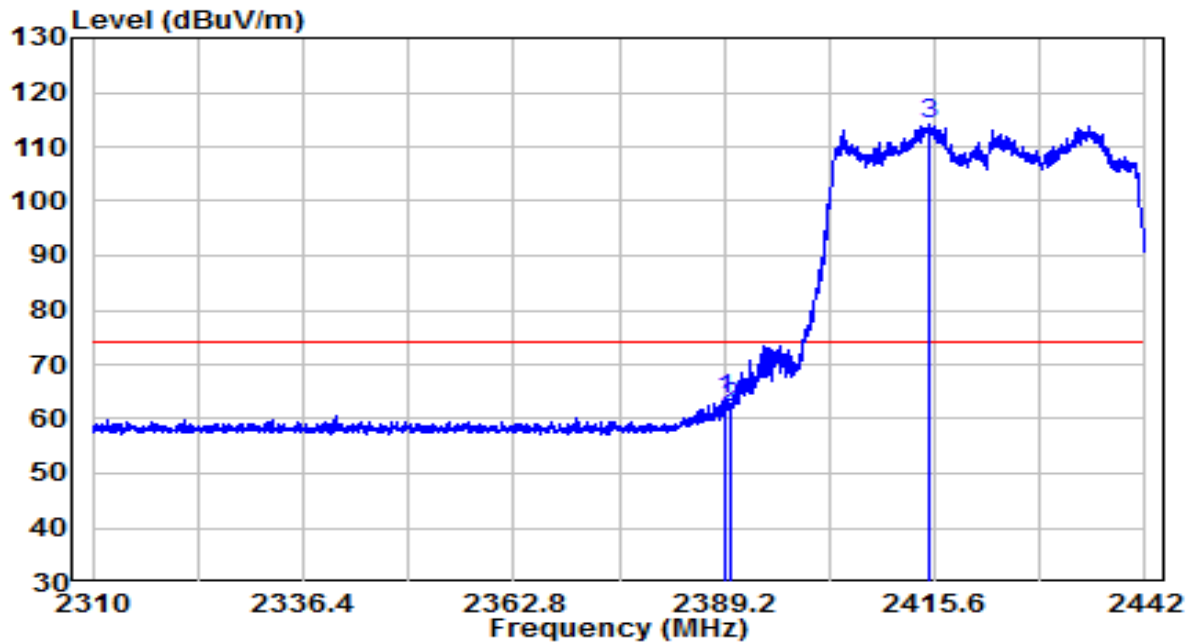


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.332        | 31.31          | 32.22      | 63.53                | -10.47      | 74.00          | Peak              |
| 2  | 2390.000        | 29.93          | 32.22      | 62.15                | -11.85      | 74.00          | Peak              |
| 3  | * 2414.874      | 81.88          | 32.32      | 114.20               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

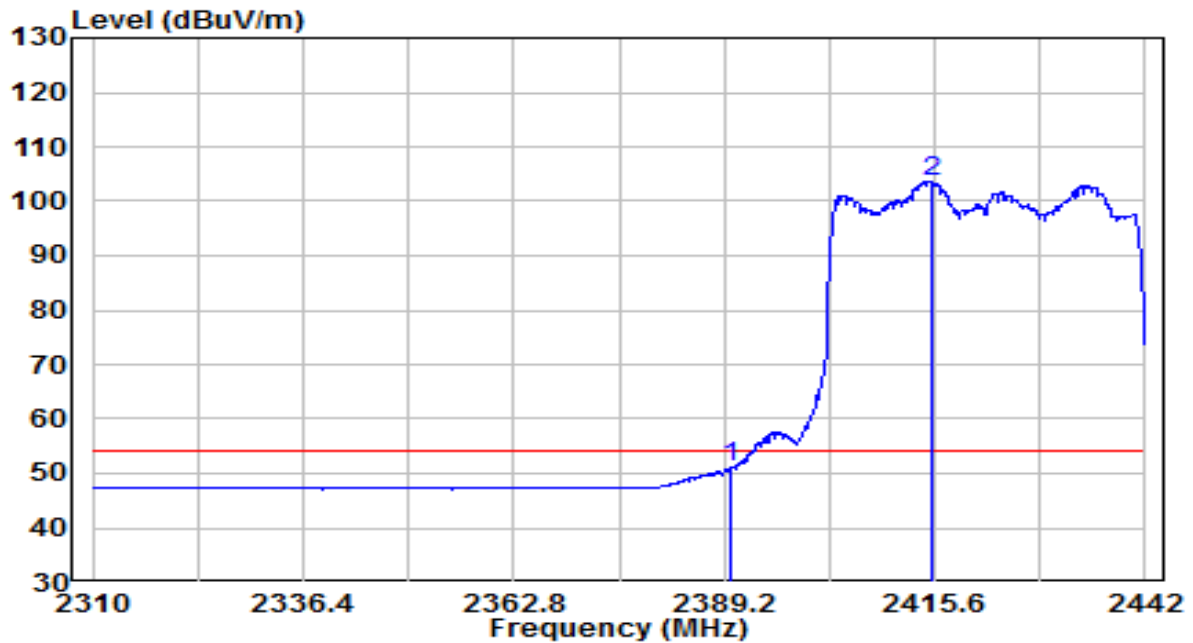


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 18.83          | 32.22      | 51.04                | -2.96       | 54.00          | Average           |
| 2  | * 2415.204      | 71.30          | 32.32      | 103.62               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

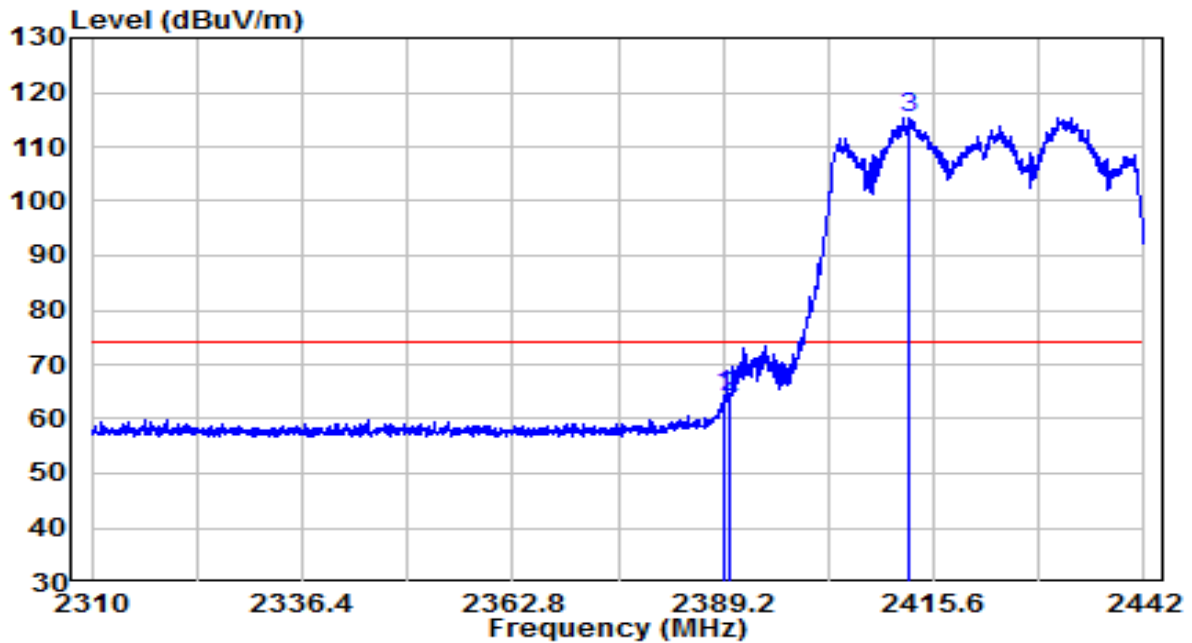


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.332        | 32.00          | 32.22      | 64.21                | -9.79       | 74.00          | Peak              |
| 2  | 2390.000        | 31.63          | 32.22      | 63.85                | -10.15      | 74.00          | Peak              |
| 3  | * 2412.564      | 83.14          | 32.31      | 115.46               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2422MHz | Test Voltage         | 120V/60Hz     |

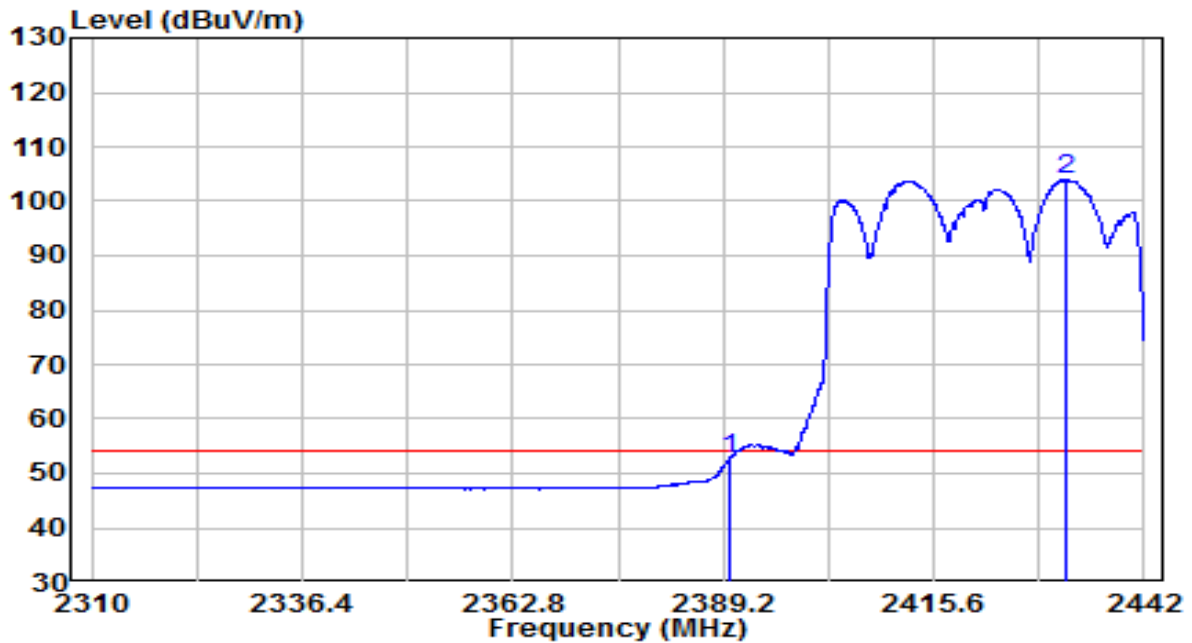


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.992        | 20.46          | 32.22      | 52.68                | -1.32       | 54.00          | Average           |
| 2  | * 2432.232      | 71.60          | 32.40      | 104.00               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

### Filter Configuration 3#

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

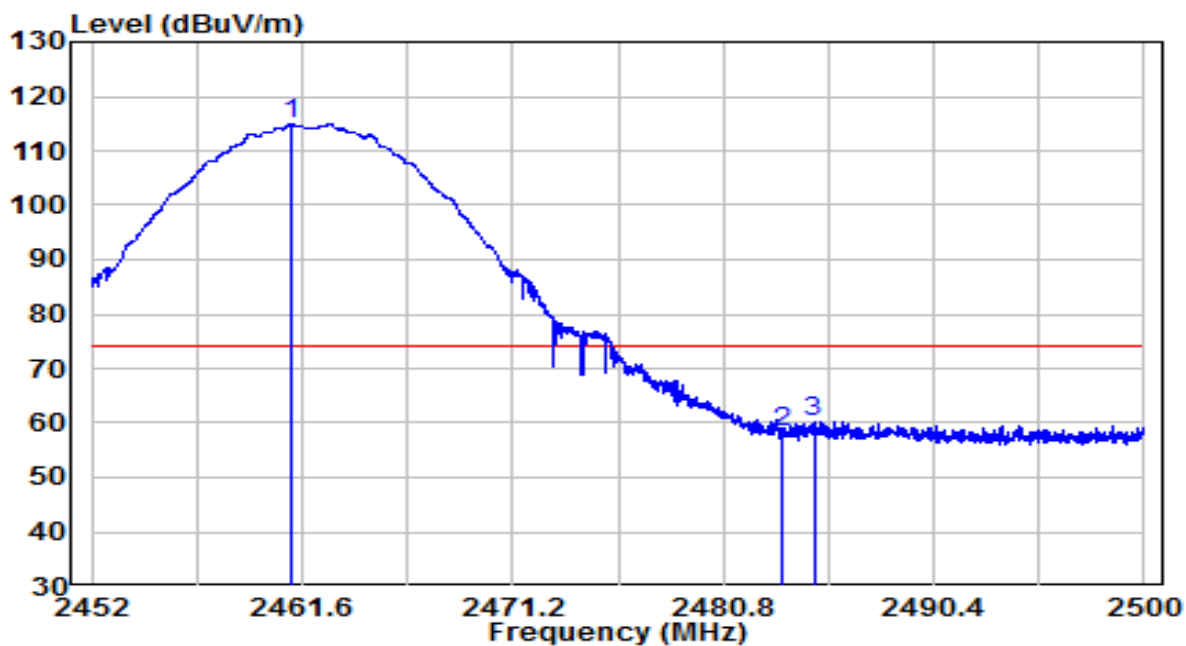


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2461.120        | 82.40          | 32.52      | 114.92               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 25.57          | 32.61      | 58.18                | -15.82      | 74.00          | Peak              |
| 3  |   | 2484.928        | 27.56          | 32.62      | 60.18                | -13.82      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

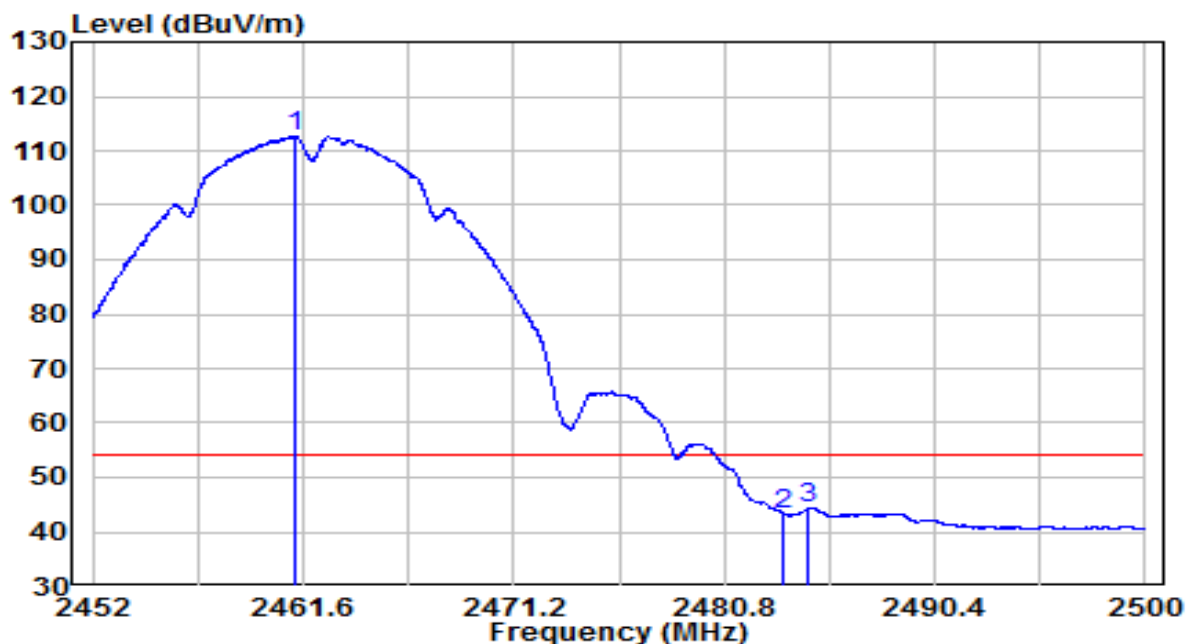


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2461.264        | 80.20          | 32.52      | 112.72               | N/A         | N/A            | Average           |
| 2  |   | 2483.500        | 10.78          | 32.61      | 43.39                | -10.61      | 54.00          | Average           |
| 3  |   | 2484.664        | 11.76          | 32.62      | 44.37                | -9.63       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

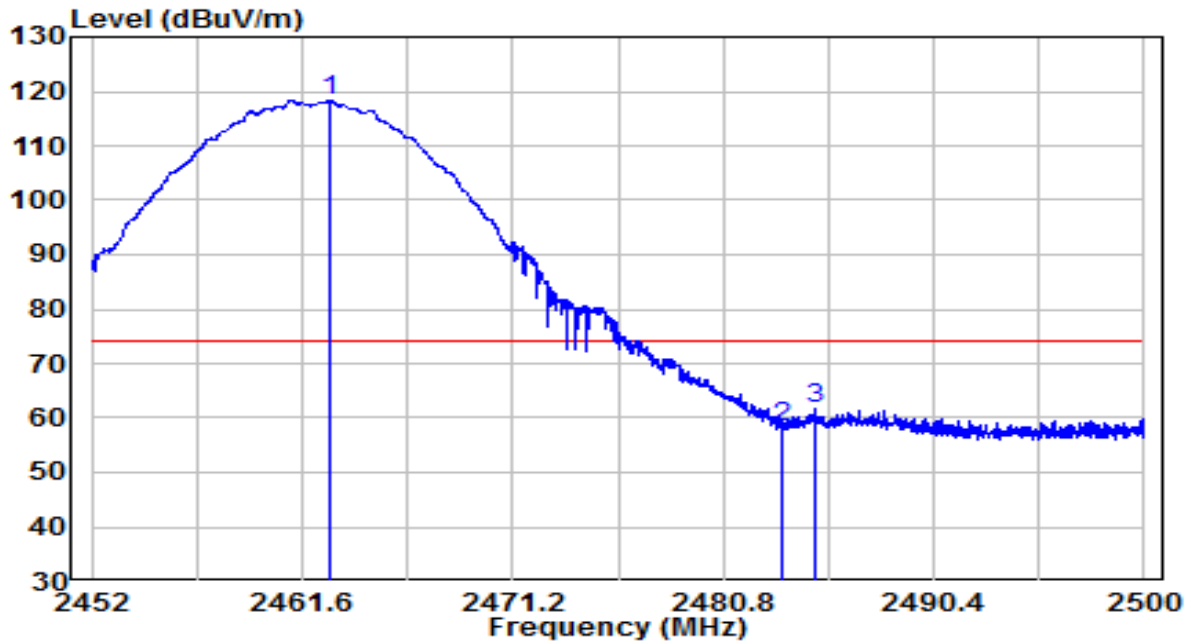


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2462.872        | 85.74          | 32.52      | 118.27               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 25.72          | 32.61      | 58.33                | -15.67      | 74.00          | Peak              |
| 3  |   | 2485.024        | 29.06          | 32.62      | 61.67                | -12.33      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11b at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

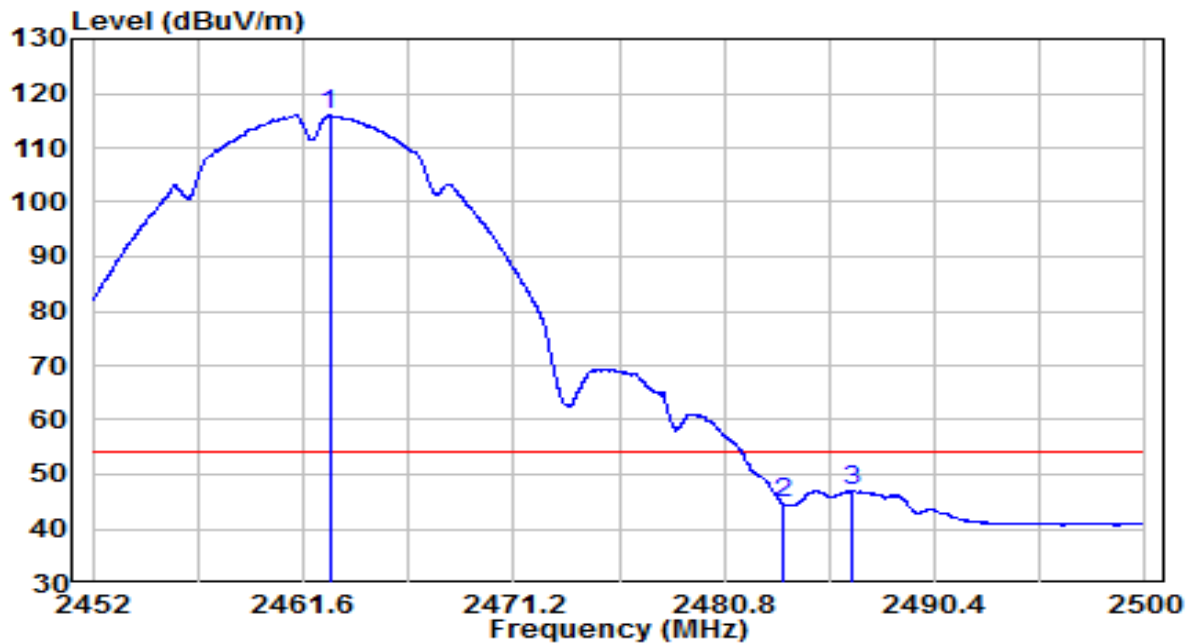


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2462.800        | 83.46          | 32.52      | 115.98               | N/A         | N/A            | Average           |
| 2  |   | 2483.500        | 12.05          | 32.61      | 44.66                | -9.34       | 54.00          | Average           |
| 3  |   | 2486.680        | 14.45          | 32.62      | 47.08                | -6.92       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

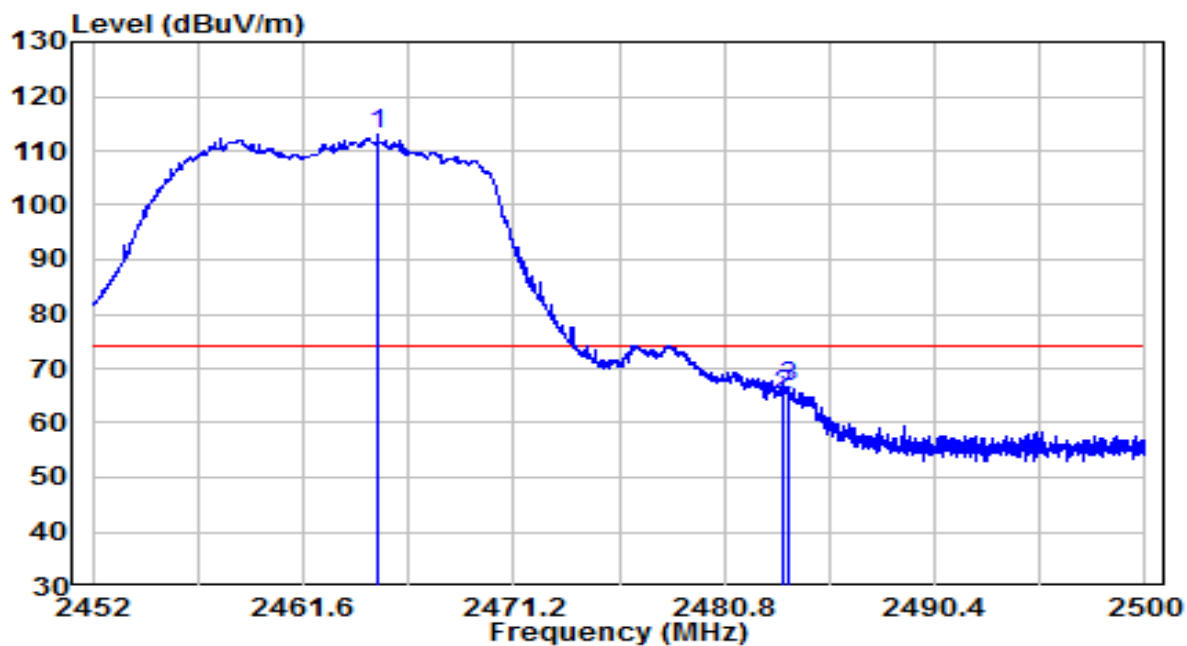


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2465.008        | 80.38          | 32.53      | 112.92               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 32.61          | 32.61      | 65.22                | -8.78       | 74.00          | Peak              |
| 3  |   | 2483.704        | 33.96          | 32.61      | 66.57                | -7.43       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

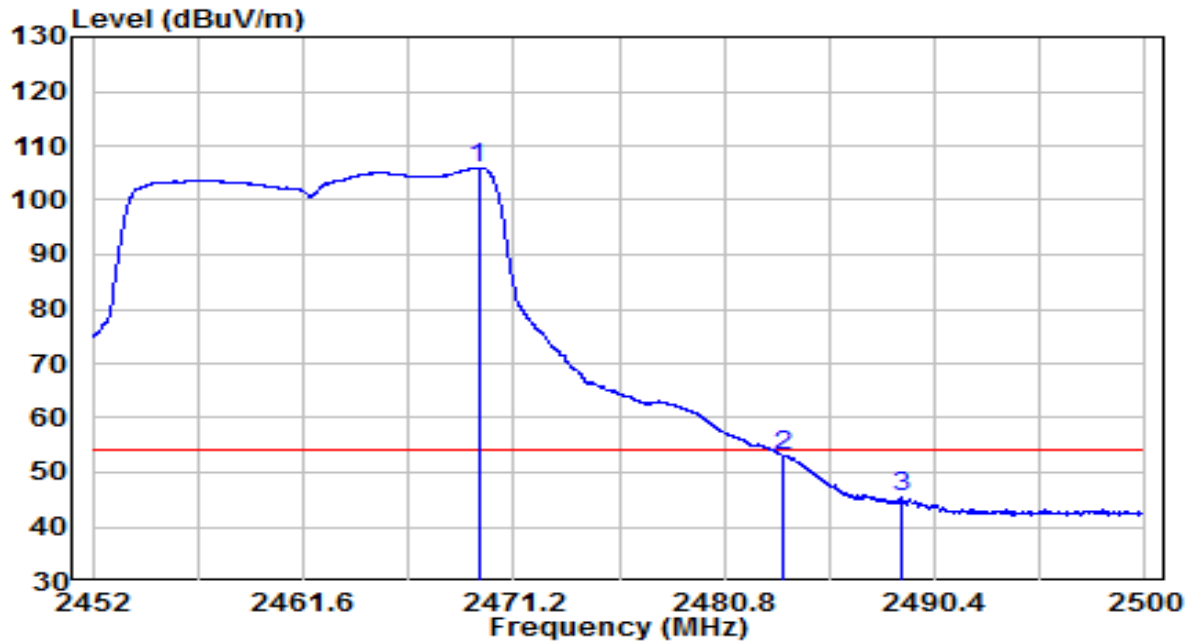


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2469.592        | 73.46          | 32.55      | 106.02               | N/A         | N/A            | Average           |
| 2  |   | 2483.500        | 20.36          | 32.61      | 52.98                | -1.02       | 54.00          | Average           |
| 3  |   | 2488.888        | 12.69          | 32.63      | 45.32                | -8.68       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

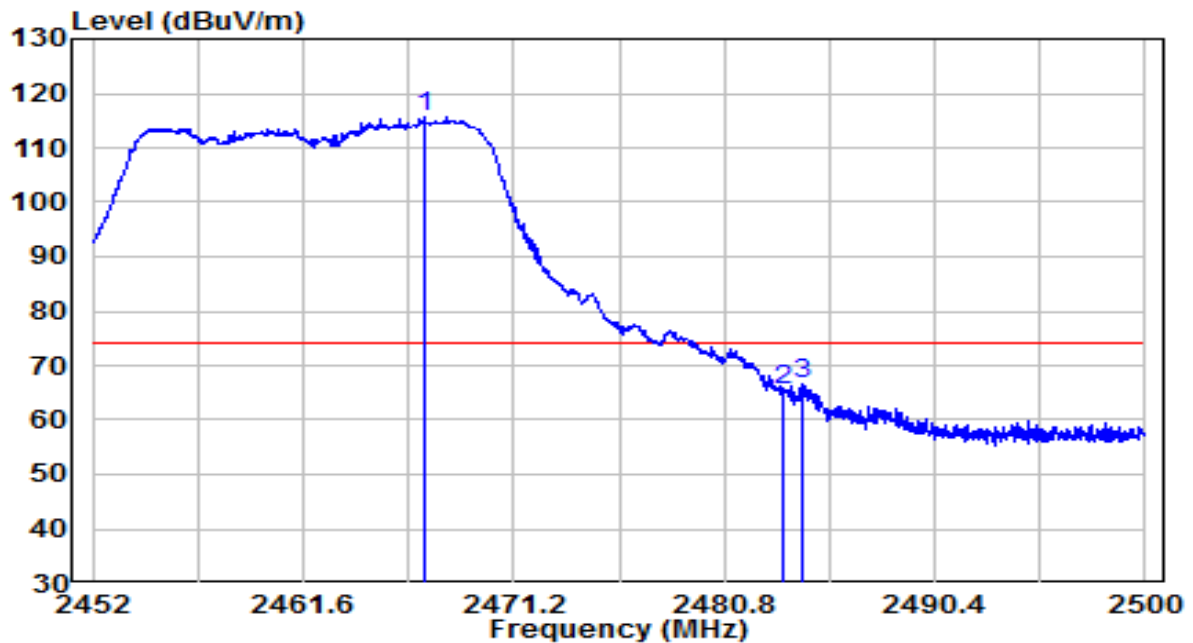


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2467.168        | 83.19          | 32.54      | 115.74               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 32.88          | 32.61      | 65.49                | -8.51       | 74.00          | Peak              |
| 3  |   | 2484.328        | 33.82          | 32.61      | 66.43                | -7.57       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |               |
|-----------|----------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021           | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11g at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

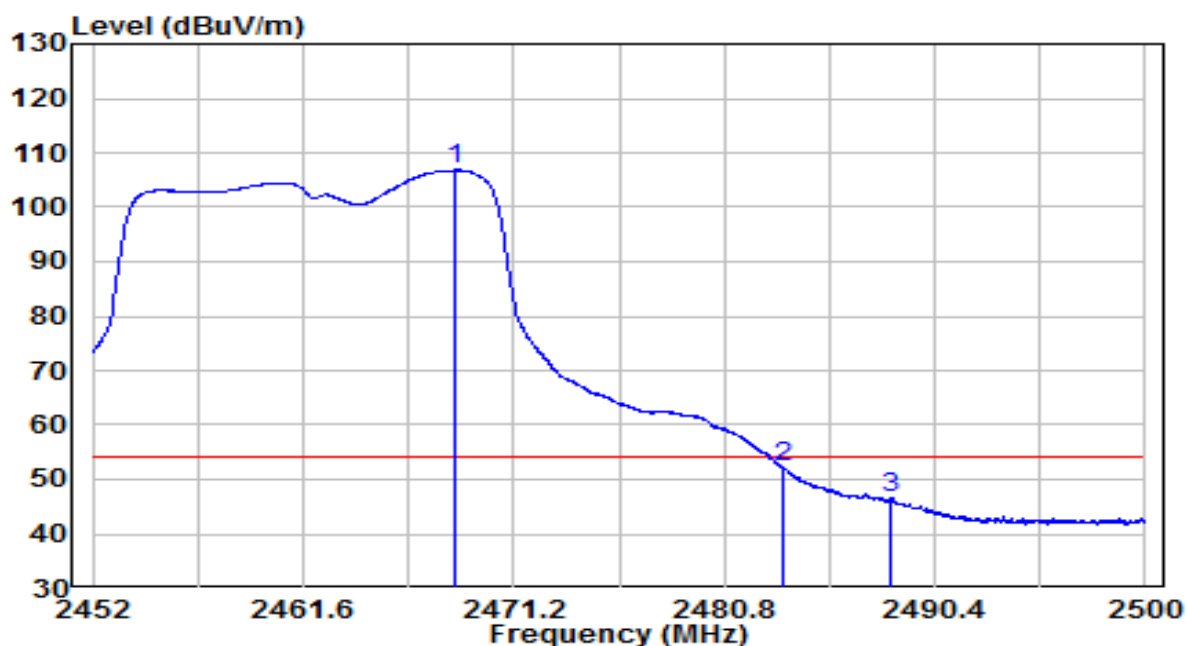


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2468.560        | 74.36          | 32.55      | 106.91               | N/A         | N/A            | Average           |
| 2  |   | 2483.500        | 19.52          | 32.61      | 52.13                | -1.87       | 54.00          | Average           |
| 3  |   | 2488.432        | 14.01          | 32.63      | 46.65                | -7.35       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

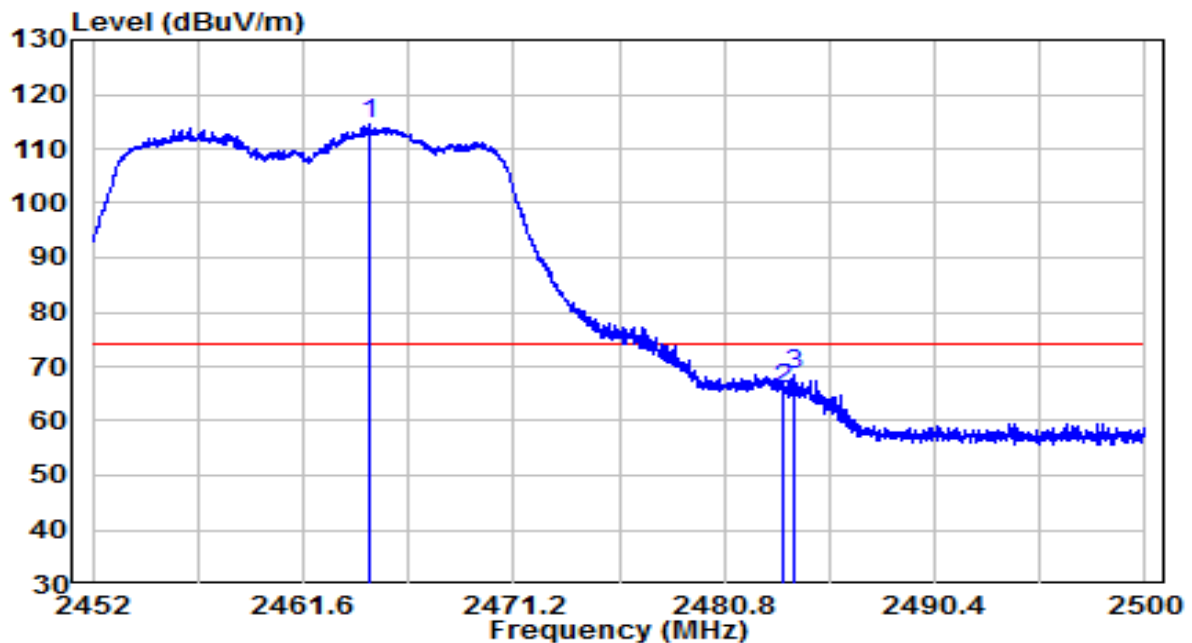


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2464.624        | 81.94          | 32.53      | 114.47               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 33.21          | 32.61      | 65.82                | -8.18       | 74.00          | Peak              |
| 3  |   | 2484.040        | 35.71          | 32.61      | 68.32                | -5.68       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

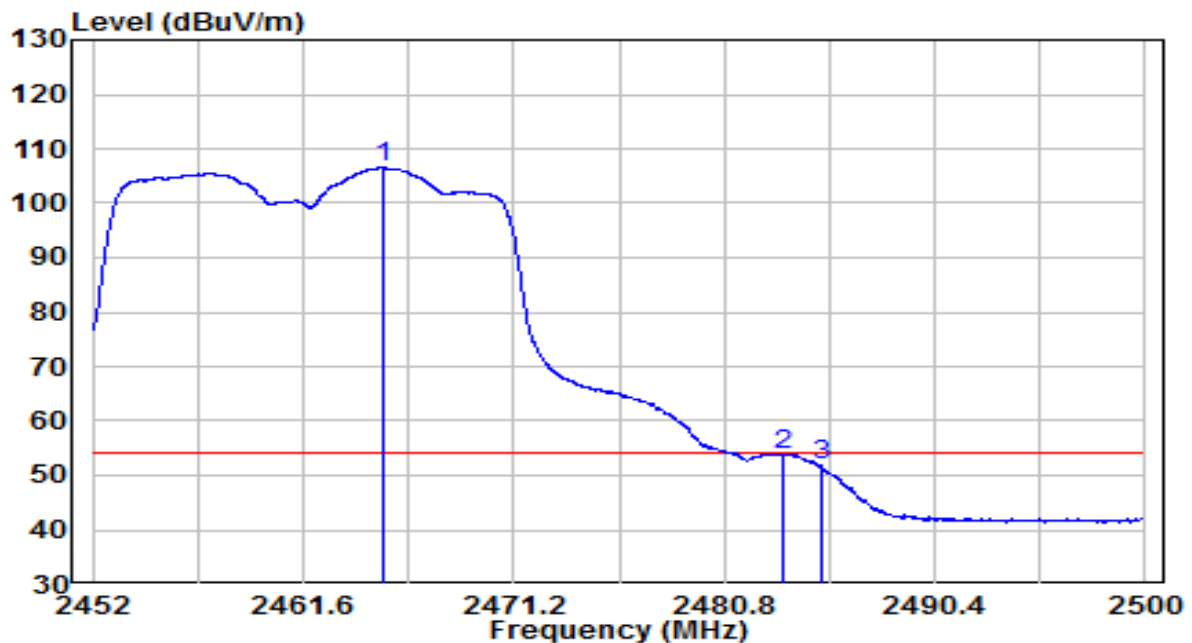


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2465.272        | 74.08          | 32.53      | 106.62               | N/A         | N/A            | Average           |
| 2  |   | 2483.500        | 21.17          | 32.61      | 53.78                | -0.22       | 54.00          | Average           |
| 3  |   | 2485.240        | 19.17          | 32.62      | 51.79                | -2.21       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

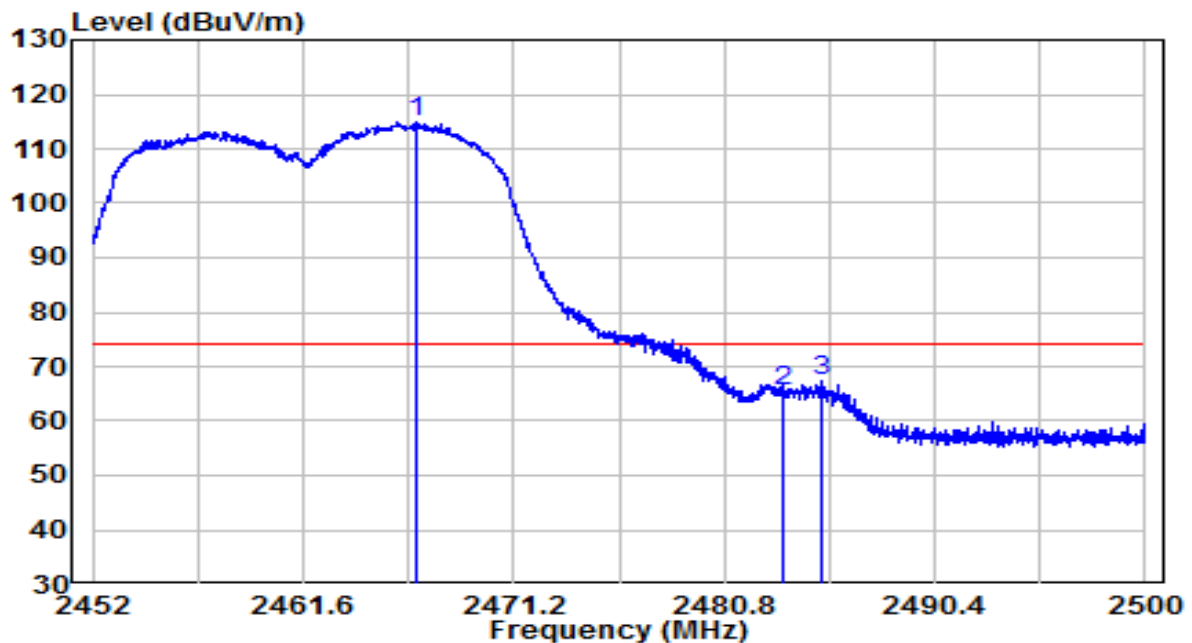


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2466.760        | 82.23          | 32.54      | 114.77               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 32.87          | 32.61      | 65.48                | -8.52       | 74.00          | Peak              |
| 3  |   | 2485.288        | 34.88          | 32.62      | 67.50                | -6.50       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

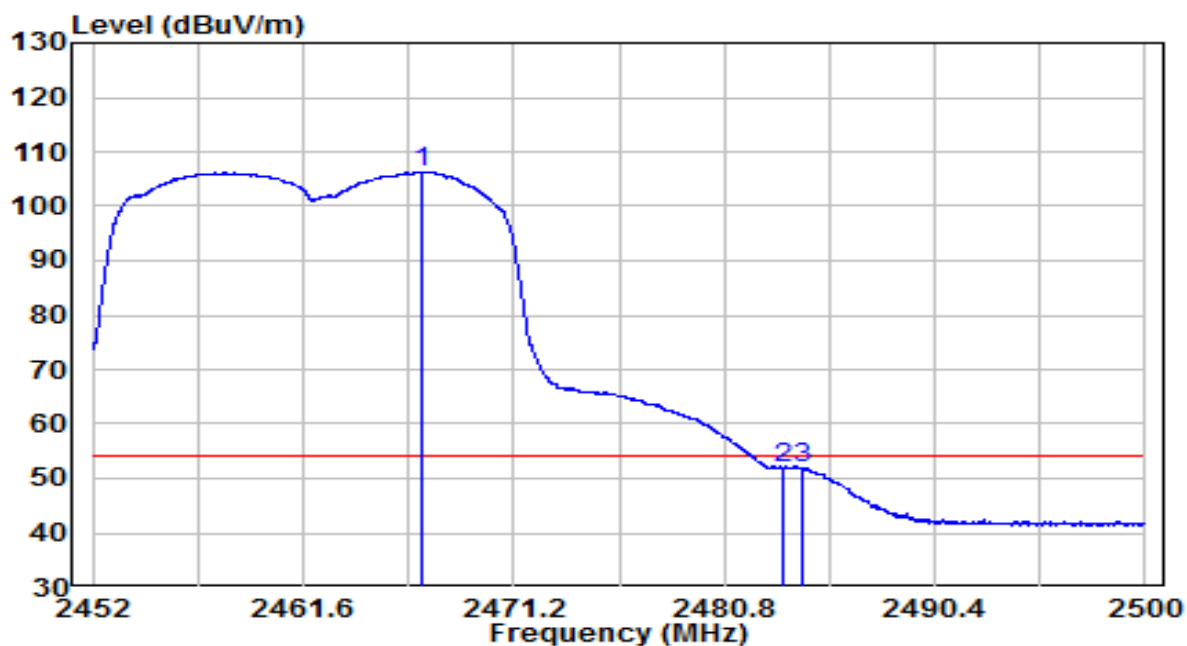


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2467.000        | 73.77          | 32.54      | 106.31               | N/A         | N/A            | Average           |
| 2  |   | 2483.500        | 19.46          | 32.61      | 52.07                | -1.93       | 54.00          | Average           |
| 3  |   | 2484.400        | 19.24          | 32.61      | 51.86                | -2.14       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

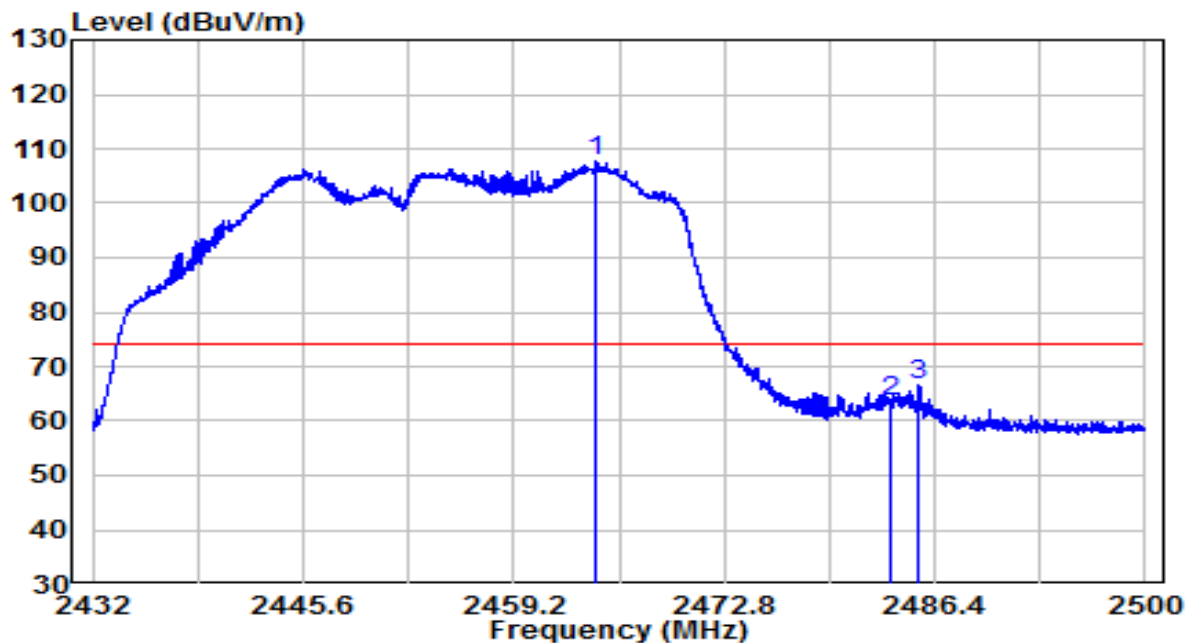


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2464.470        | 75.12          | 32.53      | 107.65               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 31.13          | 32.61      | 63.74                | -10.26      | 74.00          | Peak              |
| 3  |   | 2485.380        | 33.99          | 32.62      | 66.61                | -7.39       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

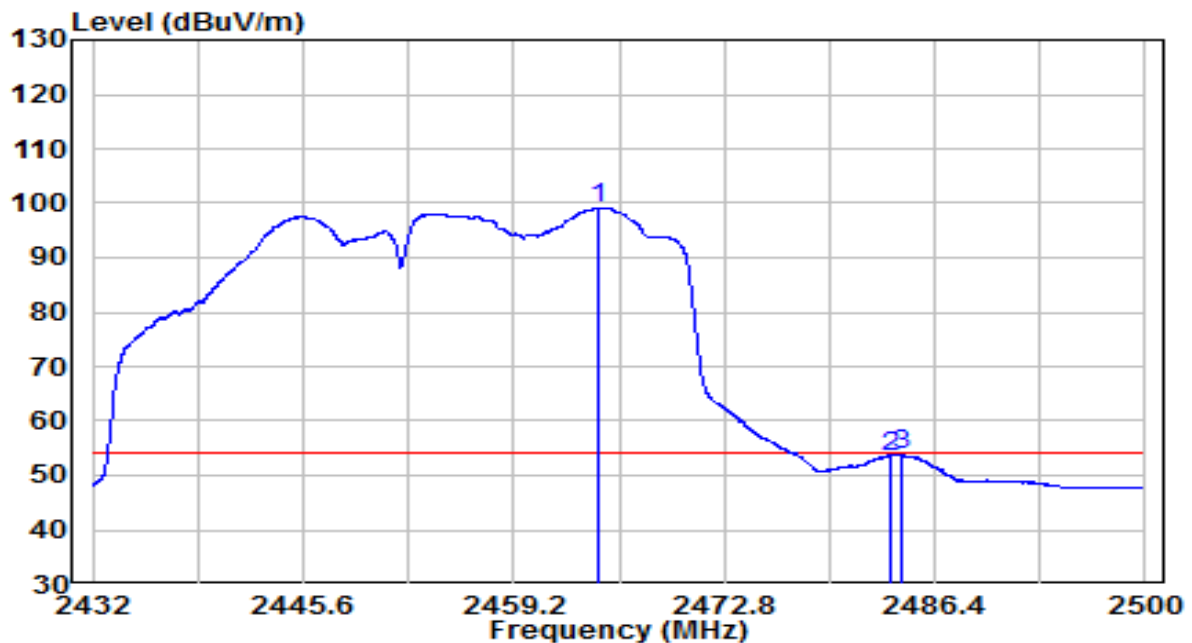


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2464.674        | 66.70          | 32.53      | 99.23                | N/A         | N/A            | Average           |
| 2  |   | 2483.500        | 20.93          | 32.61      | 53.55                | -0.45       | 54.00          | Average           |
| 3  |   | 2484.190        | 21.19          | 32.61      | 53.81                | -0.19       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

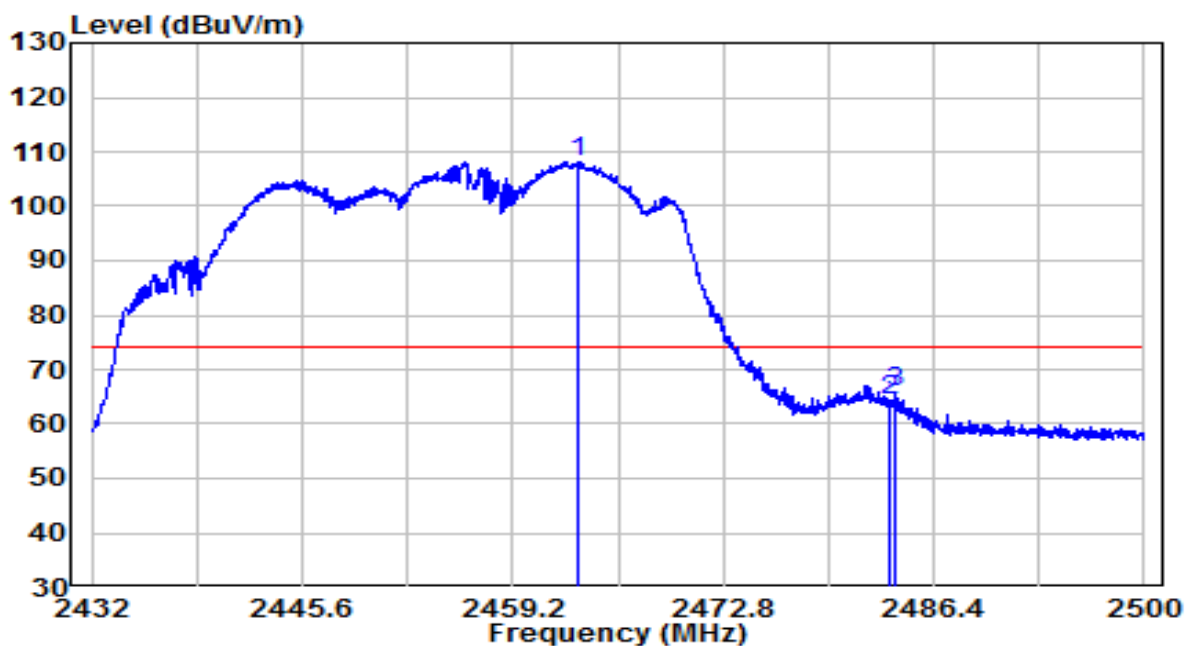


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2463.382        | 75.68          | 32.53      | 108.20               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 31.77          | 32.61      | 64.38                | -9.62       | 74.00          | Peak              |
| 3  |   | 2483.986        | 33.17          | 32.61      | 65.78                | -8.22       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11n-HT40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

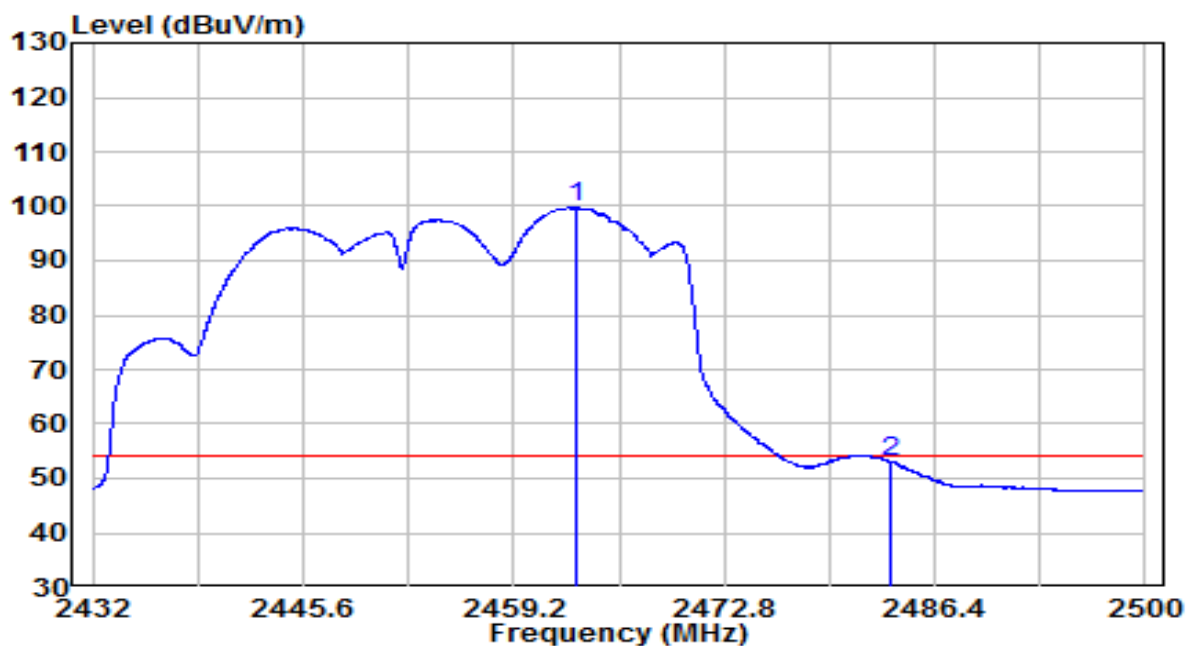


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2463.246        | 67.15          | 32.53      | 99.67                | N/A         | N/A            | Average           |
| 2  |   | 2483.510        | 20.59          | 32.61      | 53.20                | -0.80       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

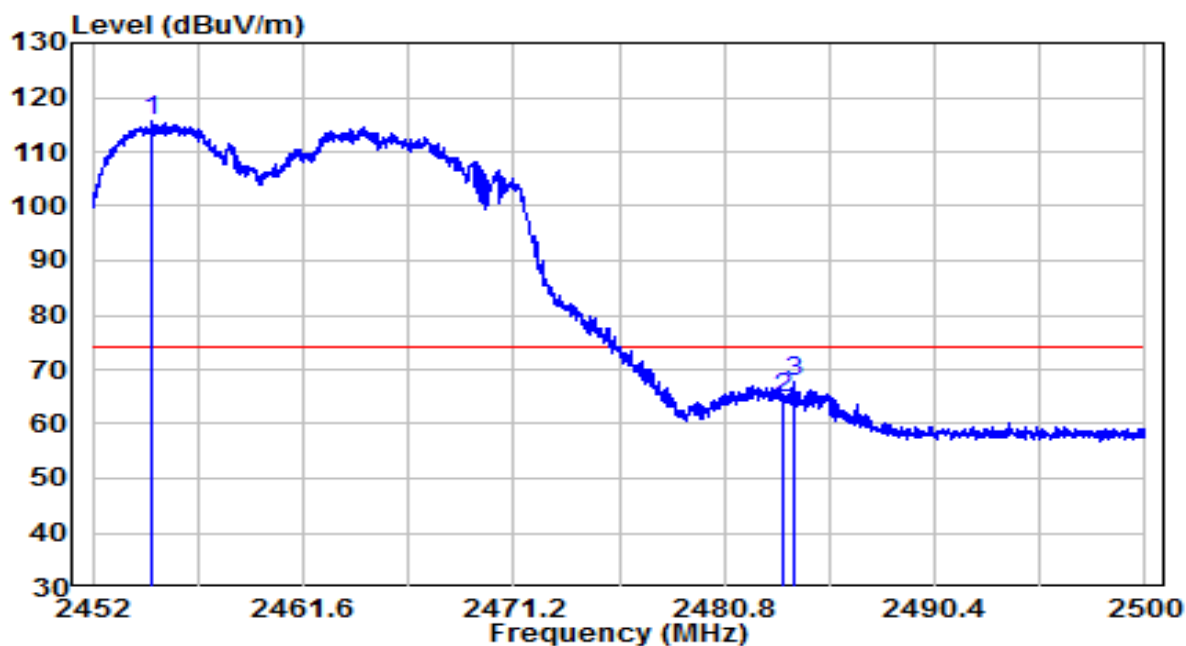


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2454.688        | 83.28          | 32.49      | 115.77               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 32.22          | 32.61      | 64.83                | -9.17       | 74.00          | Peak              |
| 3  |   | 2483.944        | 35.06          | 32.61      | 67.67                | -6.33       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

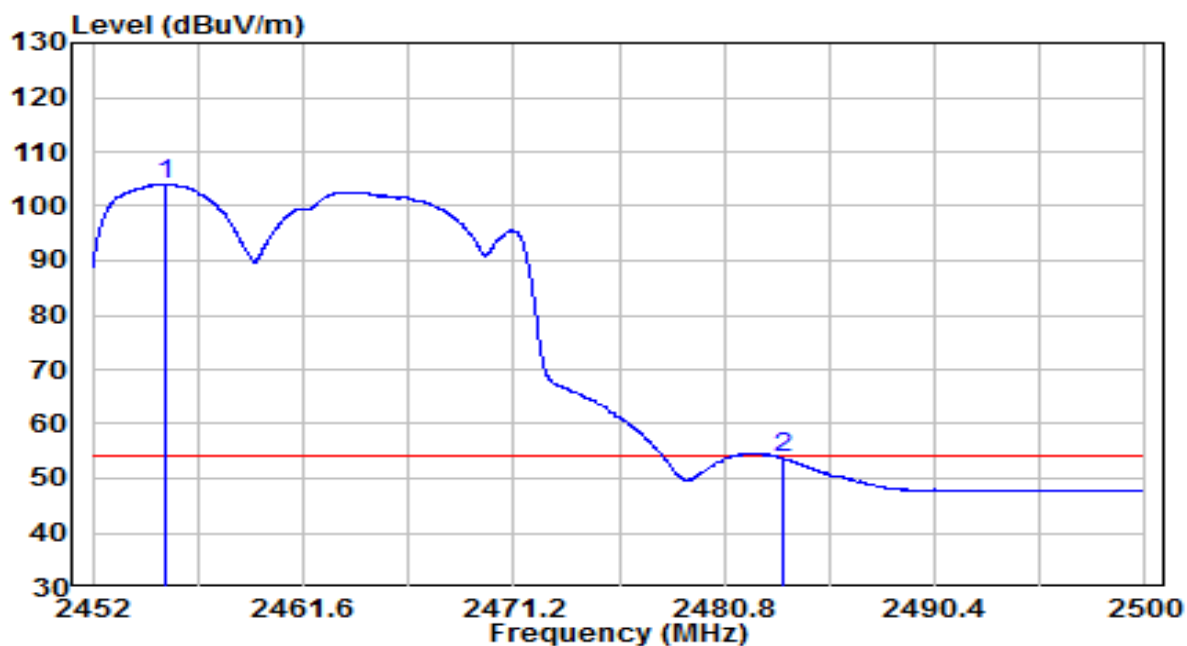


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2455.312        | 71.55          | 32.49      | 104.04               | N/A         | N/A            | Average           |
| 2  |   | 2483.500        | 21.00          | 32.61      | 53.61                | -0.39       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

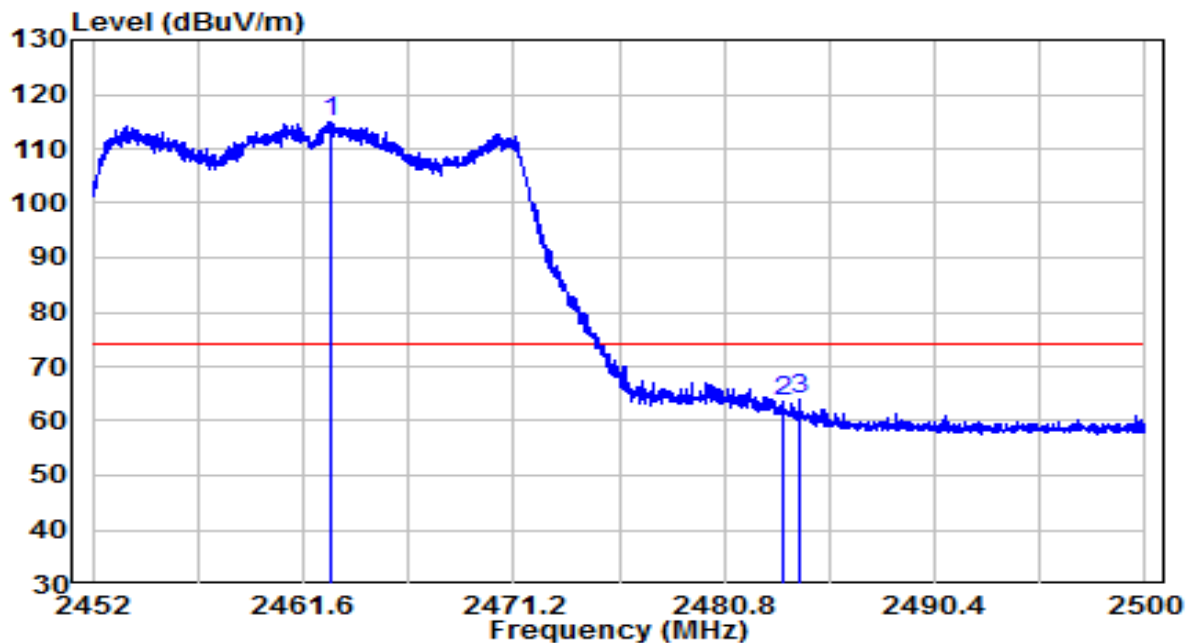


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2462.824        | 82.56          | 32.52      | 115.08               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 30.83          | 32.61      | 63.44                | -10.56      | 74.00          | Peak              |
| 3  |   | 2484.256        | 31.29          | 32.61      | 63.91                | -10.09      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2462MHz | Test Voltage         | 120V/60Hz     |

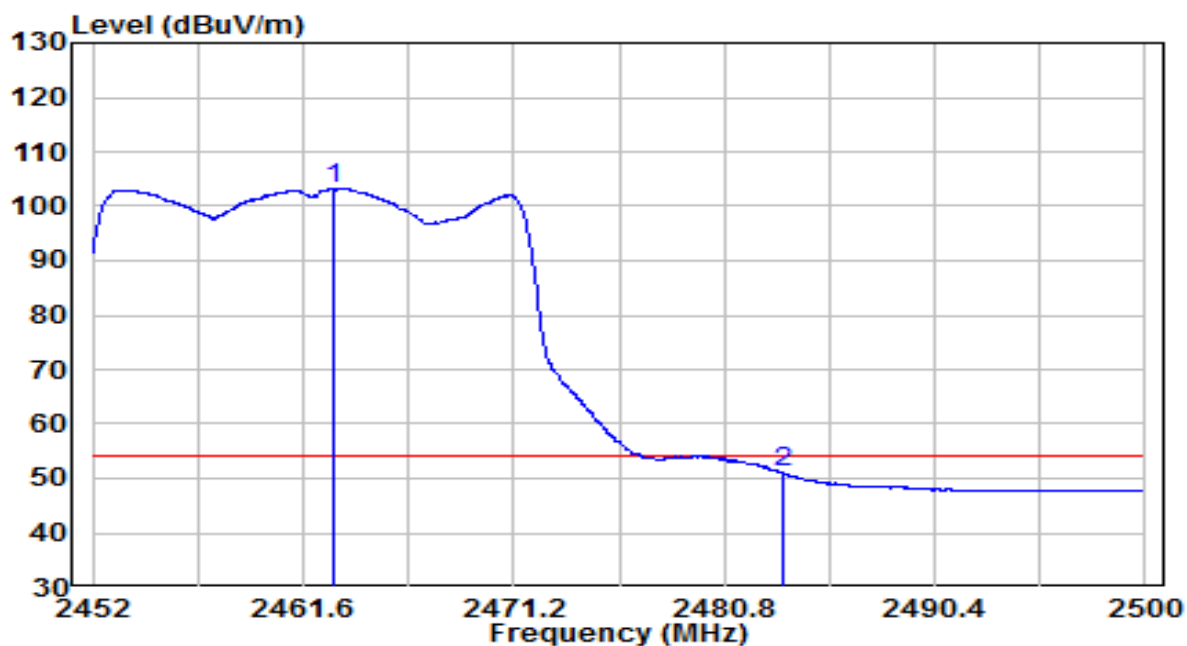


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2463.040        | 70.77          | 32.52      | 103.29               | N/A         | N/A            | Average           |
| 2  |   | 2483.500        | 18.42          | 32.61      | 51.03                | -2.97       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

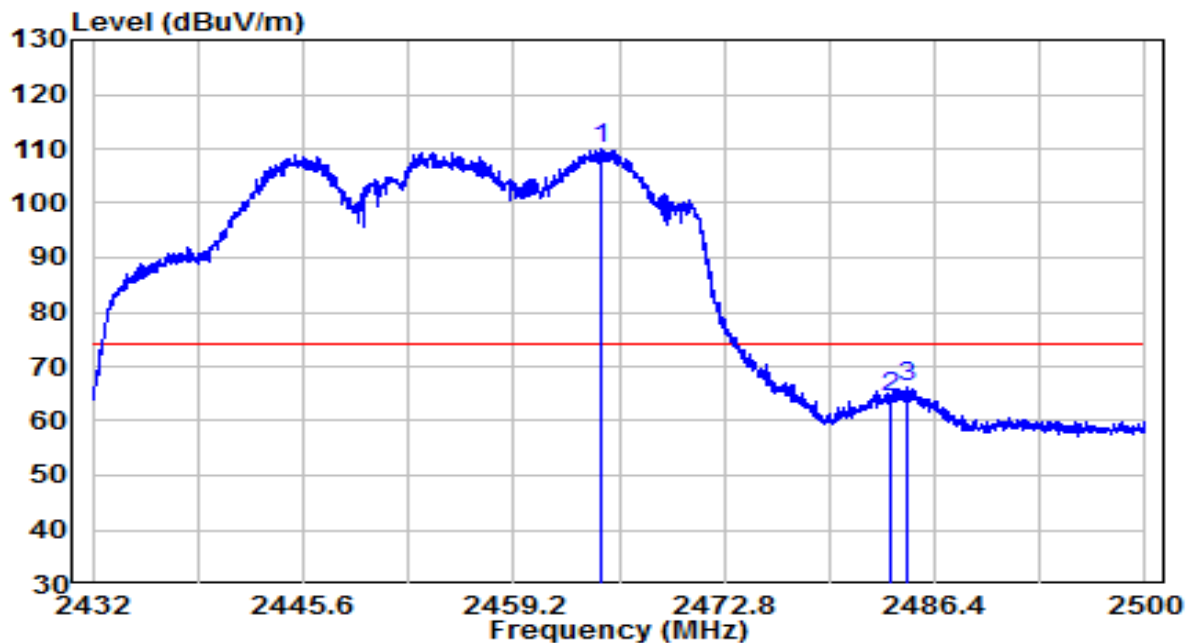


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2464.844        | 77.37          | 32.53      | 109.90               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 31.64          | 32.61      | 64.25                | -9.75       | 74.00          | Peak              |
| 3  |   | 2484.666        | 33.48          | 32.62      | 66.09                | -7.91       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

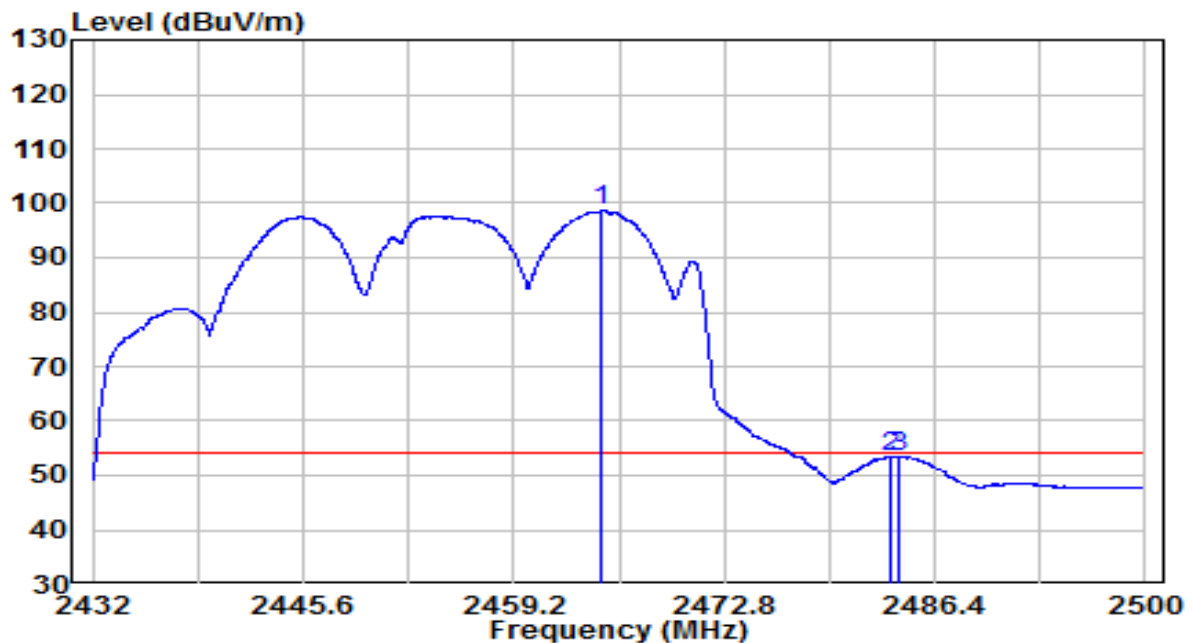


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2464.878        | 66.09          | 32.53      | 98.62                | N/A         | N/A            | Average           |
| 2  |   | 2483.500        | 20.76          | 32.61      | 53.38                | -0.62       | 54.00          | Average           |
| 3  |   | 2484.122        | 20.86          | 32.61      | 53.48                | -0.52       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

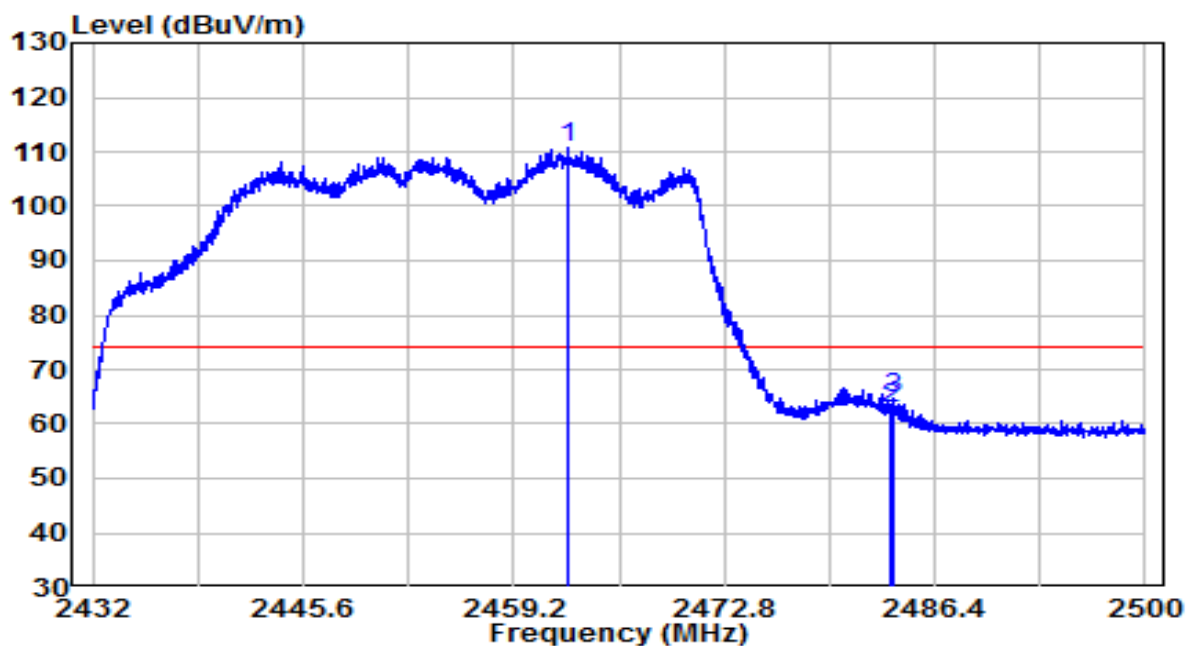


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2462.702        | 78.33          | 32.52      | 110.85               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 30.24          | 32.61      | 62.85                | -11.15      | 74.00          | Peak              |
| 3  |   | 2483.646        | 32.21          | 32.61      | 64.83                | -9.17       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | ACCESS POINT                                 | Date of Test         | 2022-01-06    |
| Factor    | BBHA 9120D (1GHz~18GHz)_2021                 | Temp. / Humidity     | 23.6°C/41.4%  |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay Chu |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 2452MHz | Test Voltage         | 120V/60Hz     |

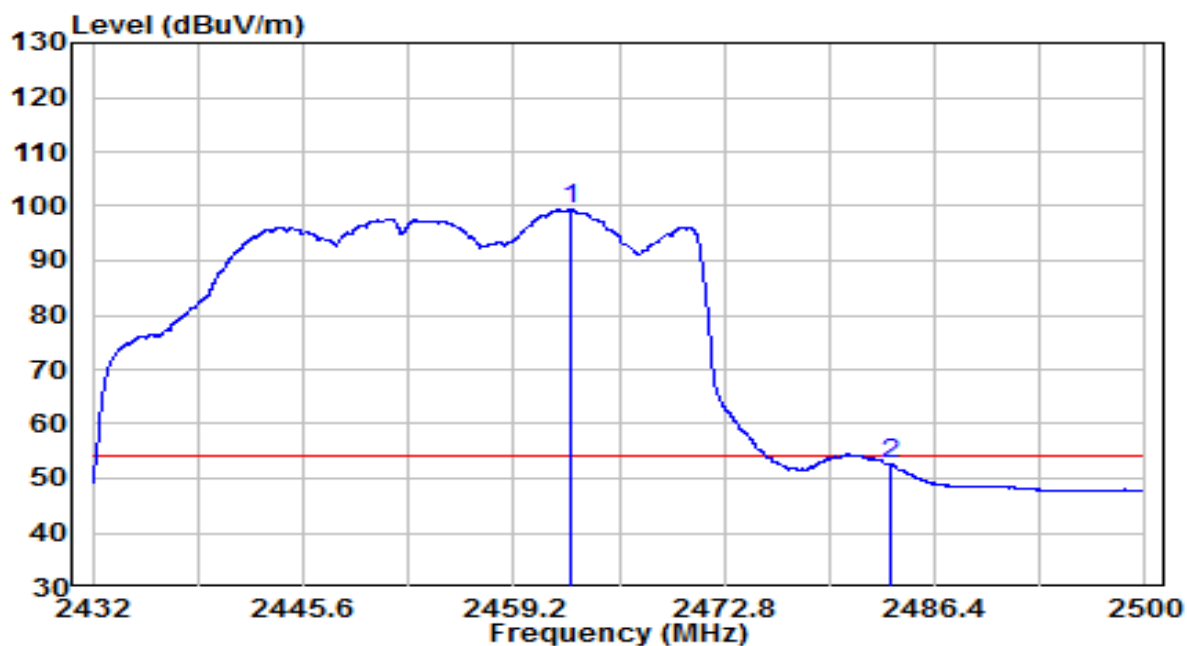

| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2462.804        | 66.82          | 32.52      | 99.35                | N/A         | N/A            | Average           |
| 2  |   | 2483.500        | 20.06          | 32.61      | 52.67                | -1.33       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

## 7.8. AC Conducted Emissions Measurement


### 7.8.1. Test Limit

| FCC Part 15 Subpart C Paragraph 15.207 Limits |           |           |
|-----------------------------------------------|-----------|-----------|
| Frequency (MHz)                               | QP (dBuV) | AV (dBuV) |
| 0.15 - 0.50                                   | 66 - 56   | 56 - 46   |
| 0.50 - 5.0                                    | 56        | 46        |
| 5.0 - 30                                      | 60        | 50        |

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.8.2. Test Setup

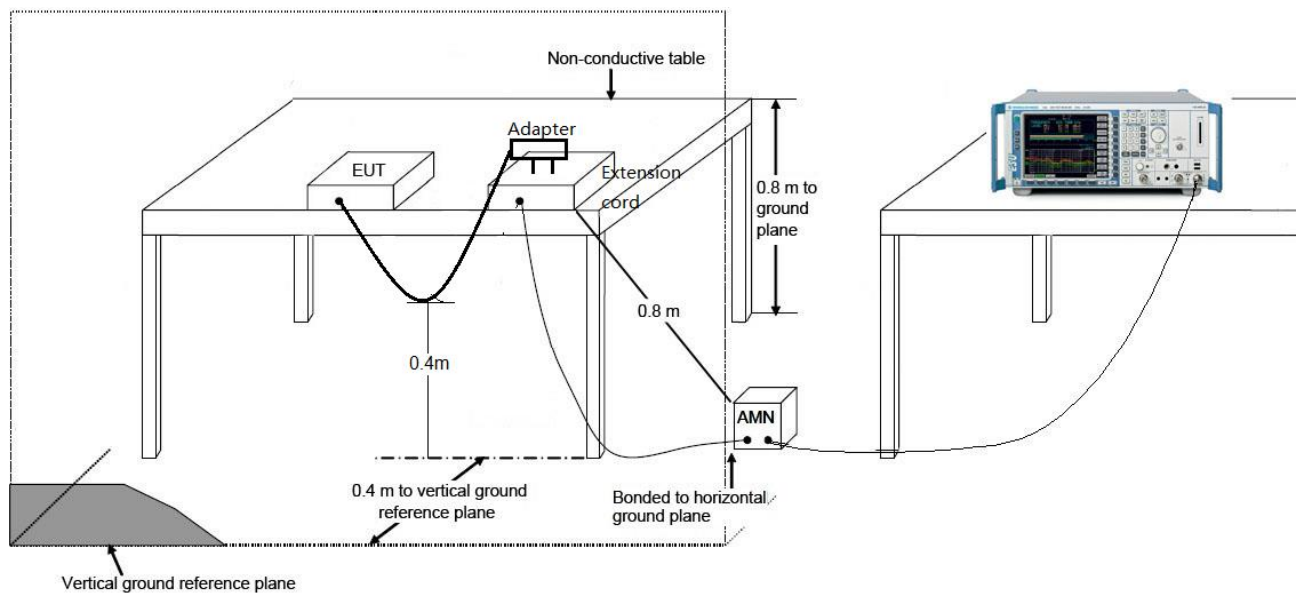

### 7.8.3.Test Result

|           |                                        |                      |                |
|-----------|----------------------------------------|----------------------|----------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06     |
| Factor    | CE_ENV216-L1 (Filter OFF)_2021         | Temp. / Humidity     | 20.3°C /43.5%  |
| Polarity  | Line1                                  | Site / Test Engineer | SR2 / Eric Lin |
| Test Mode | Transmit by 802.11b at Channel 2437MHz | Test Voltage         | 120V/60Hz      |

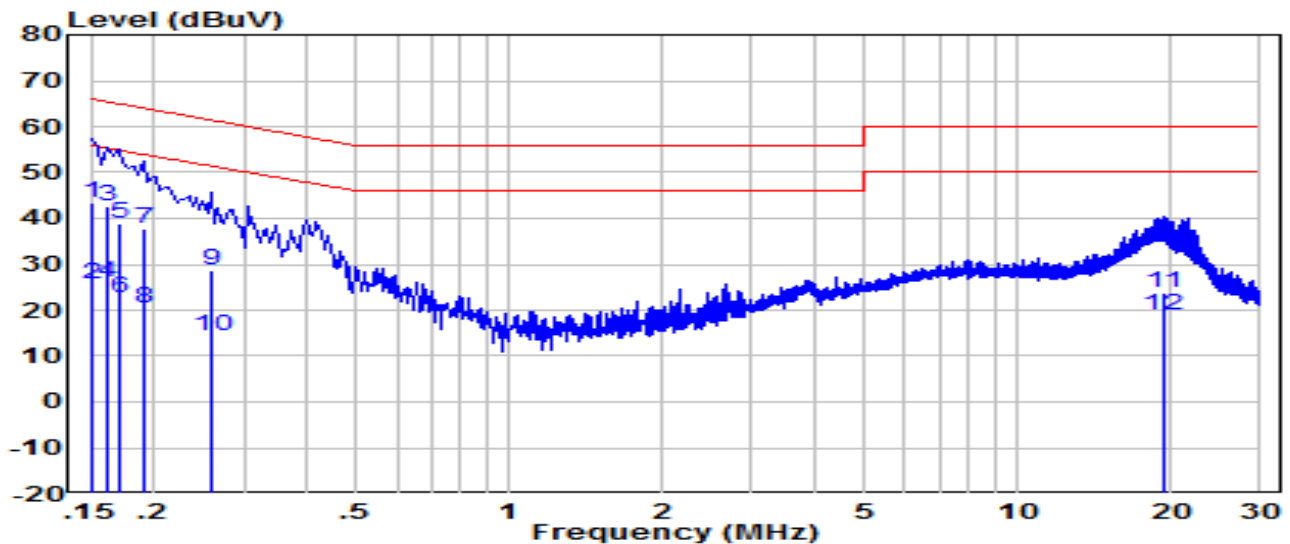


| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB) | Measurement (dBμV) | Margin (dB) | Limit (dBμV) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | * | 0.150           | 33.89          | 9.61     | 43.50              | -22.50      | 66.00        | QP                |
| 2  |   | 0.150           | 16.19          | 9.61     | 25.80              | -30.20      | 56.00        | Average           |
| 3  |   | 0.162           | 33.19          | 9.61     | 42.80              | -22.56      | 65.36        | QP                |
| 4  |   | 0.162           | 16.29          | 9.61     | 25.90              | -29.46      | 55.36        | Average           |
| 5  |   | 0.170           | 29.39          | 9.61     | 39.00              | -25.96      | 64.96        | QP                |
| 6  |   | 0.170           | 13.19          | 9.61     | 22.80              | -32.16      | 54.96        | Average           |
| 7  |   | 0.190           | 27.99          | 9.61     | 37.60              | -26.44      | 64.04        | QP                |
| 8  |   | 0.190           | 10.79          | 9.61     | 20.40              | -33.64      | 54.04        | Average           |
| 9  |   | 0.258           | 18.88          | 9.62     | 28.50              | -33.00      | 61.50        | QP                |
| 10 |   | 0.258           | 4.88           | 9.62     | 14.50              | -37.00      | 51.50        | Average           |
| 11 |   | 19.300          | 13.83          | 9.97     | 23.80              | -36.20      | 60.00        | QP                |
| 12 |   | 19.300          | 8.73           | 9.97     | 18.70              | -31.30      | 50.00        | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement(dBμV) = Reading(dBμV) + C.F (Correction Factor).

|           |                                        |                      |                |
|-----------|----------------------------------------|----------------------|----------------|
| EUT       | ACCESS POINT                           | Date of Test         | 2022-01-06     |
| Factor    | CE_ENV216-N (Filter OFF)_2021          | Temp. / Humidity     | 20.3°C /43.5%  |
| Polarity  | Neutral                                | Site / Test Engineer | SR2 / Eric Lin |
| Test Mode | Transmit by 802.11b at Channel 2437MHz | Test Voltage         | 120V/60Hz      |

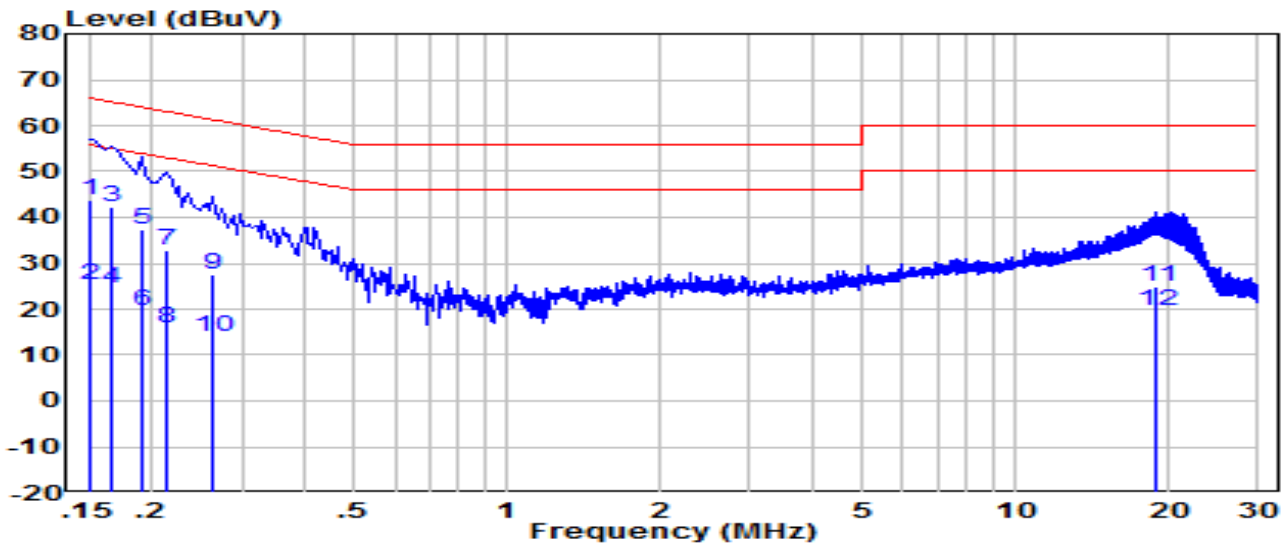

| No |   | Frequency (MHz) | Reading (dBμV) | C.F (dB) | Measurement (dBμV) | Margin (dB) | Limit (dBμV) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | * | 0.150           | 34.08          | 9.62     | 43.70              | -22.30      | 66.00        | QP                |
| 2  |   | 0.150           | 15.78          | 9.62     | 25.40              | -30.60      | 56.00        | Average           |
| 3  |   | 0.166           | 32.68          | 9.62     | 42.30              | -22.86      | 65.16        | QP                |
| 4  |   | 0.166           | 14.78          | 9.62     | 24.40              | -30.76      | 55.16        | Average           |
| 5  |   | 0.190           | 27.59          | 9.61     | 37.20              | -26.84      | 64.04        | QP                |
| 6  |   | 0.190           | 9.99           | 9.61     | 19.60              | -34.44      | 54.04        | Average           |
| 7  |   | 0.214           | 23.09          | 9.61     | 32.70              | -30.35      | 63.05        | QP                |
| 8  |   | 0.214           | 6.39           | 9.61     | 16.00              | -37.05      | 53.05        | Average           |
| 9  |   | 0.262           | 17.78          | 9.62     | 27.40              | -33.97      | 61.37        | QP                |
| 10 |   | 0.262           | 4.28           | 9.62     | 13.90              | -37.47      | 51.37        | Average           |
| 11 |   | 18.980          | 14.77          | 10.03    | 24.80              | -35.20      | 60.00        | QP                |
| 12 |   | 18.980          | 9.67           | 10.03    | 19.70              | -30.30      | 50.00        | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement(dBμV) = Reading(dBμV) + C.F (Correction Factor).

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

---

The End

## **Appendix A - Test Setup Photograph**

Refer to “2105TW0602-Test setup photo” file.

## **Appendix B - EUT Photograph**

Refer to “2105TW0602-EUT photo” file.