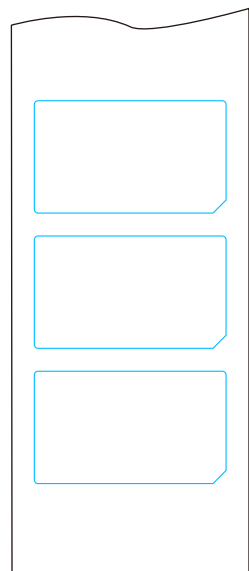
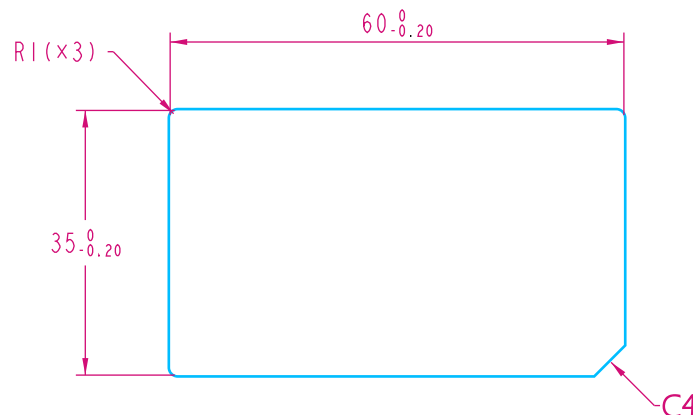


REVISIONS

REV	DESCRIPTION	DATE	APPROVE
A	NEW RELEASE	12/16/24	ALEX QI

出標方向
↓

■ PANTONE COOL GRAY 3C
■ PANTONE BLACK C

1. MATERIAL: WHITE MATTE PET, 金利寶HTYL75(EB) T=0.075

ADHESIVE: ACRYLIC 網紋背膠

2. 被貼物: 鋁壓鑄

3. 适用温度: -20~100℃

4. UL APPROVED, PGDQ2, CM-100-KP

5. 刀模

6. PRINTING COLOR: ■ PANTONE COOL GRAY 3C

■ PANTONE BLACK C

7. 边距3±0.5mm, 跳距3±0.2mm, 卷状入料, 直径不可超过160mm


8. 粘着力: 180 PEEL ADHESION

9. TEST ITEM:

TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1 附着力测试	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5% is affected.
2 酒精耐磨测试	Material: Alcohol 95%, 0.5ml Load force: 500g	Test Length: 2cm Test Cycle: 30 cycles	表面不可脱落、擦伤痕迹、变色、见底材
3 橡皮摩擦测试	Material: EF74 rubber Load force: 500g	Test Length: 2cm Test Cycle: 50 cycles	表面不可脱落、痕迹、变色、见底材

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE:
INTEGRAL DIMENSIONS ± 0.2
1 PLACE DECIMAL ± 0.2
ANGULAR DIMENSIONS ± 2°
HOLES UNDER Ø5.00 ± 0.2

THIRD ANGLE PROJECTION



DRAWN	VERA ZHAO	12/16/24
ENGR	VERA ZHAO	12/16/24
APVD	ALEX QI	12/16/24

WNC 啟碁科技股份有限公司
20 Park Avenue II, Hsinchu Science Park,
Hsinchu 308, Taiwan, R.O.C.
Tel: 886-3-6667799 Fax: 886-3-5788726

DWG TITLE

LABEL, AGENCY, 60X35MM, PET, 4014098-01, RAJB-AB725

SIZE A4	DWG NO. 4L.RAJBA.00J	REV A
SCALE 1/1	SHEET 1 OF 1	