



Incumbent Signal Calibration Plots (NII-5 Band)


802.11be-EHT20 / CH1

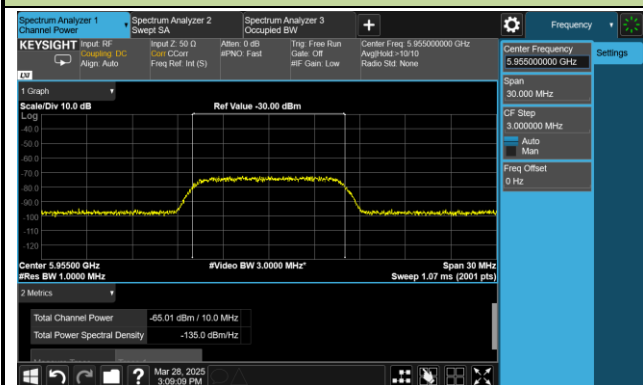


802.11be-EHT160 / CH15 (Low Edge)

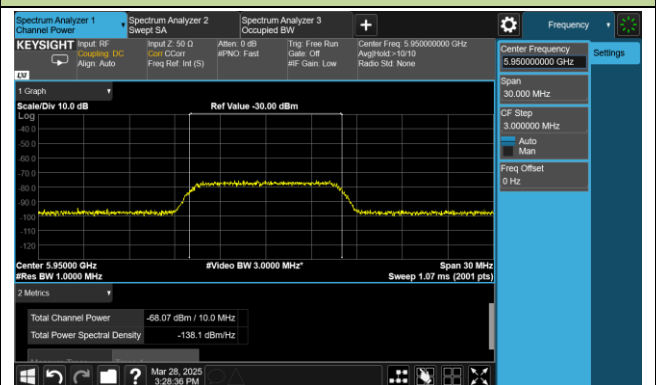

802.11be-EHT160 / CH15 (Middle)

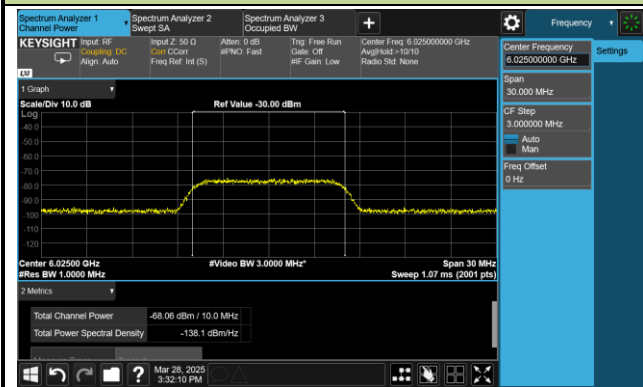


802.11be-EHT160 / CH15 (High Edge)

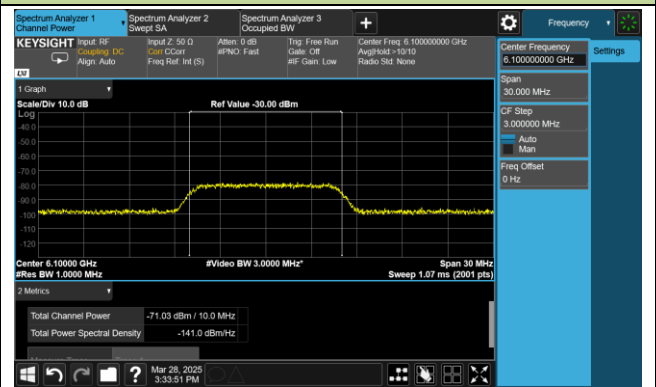


Incumbent Signal Calibration Plots (NII-6 Band)


802.11be-EHT20 / CH101

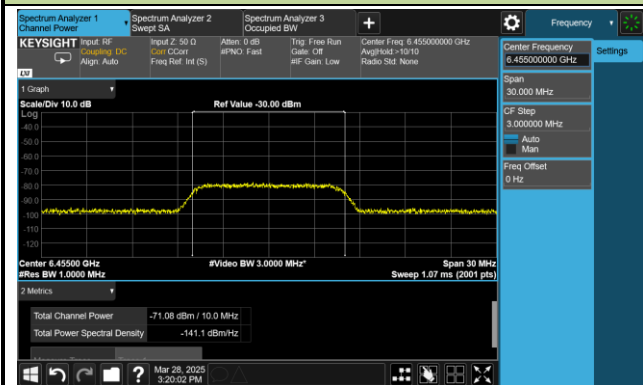


802.11be-EHT160 / CH111 (Low Edge)

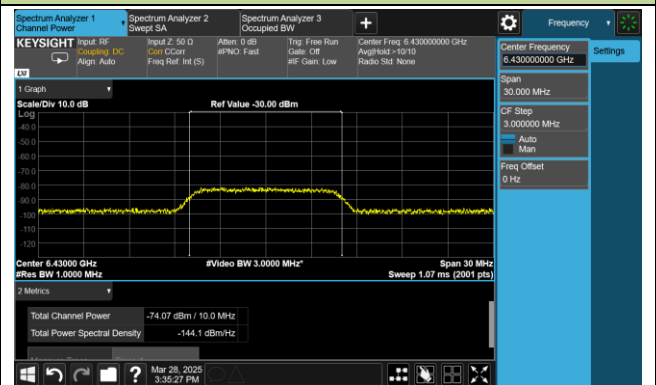

802.11be-EHT160 / CH111 (Middle)

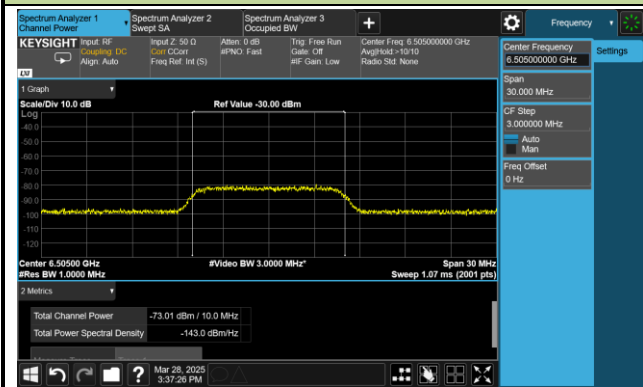


802.11be-EHT160 / CH111 (High Edge)

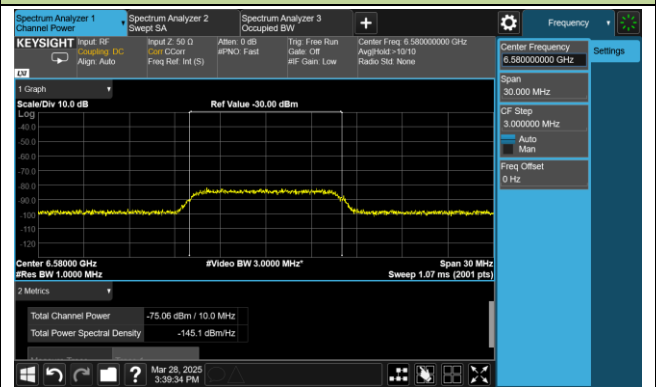


Incumbent Signal Calibration Plots (NII-7 Band)


802.11be-EHT20 / CH121

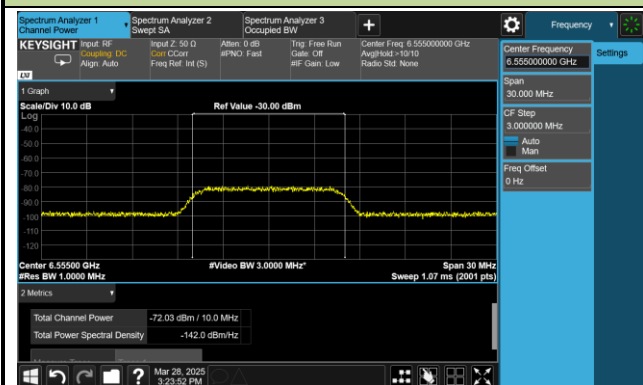


802.11be-EHT160 / CH143 (Low Edge)

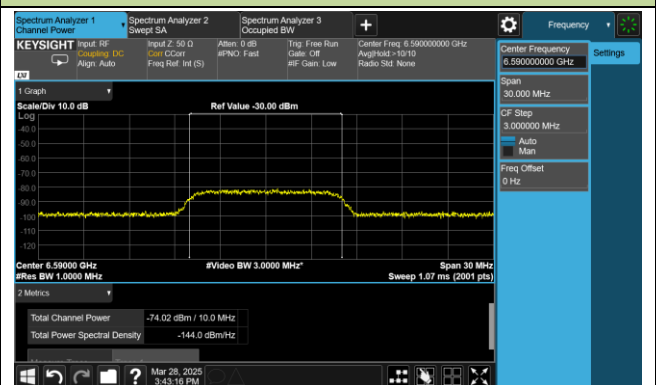

802.11be-EHT160 / CH143 (Middle)

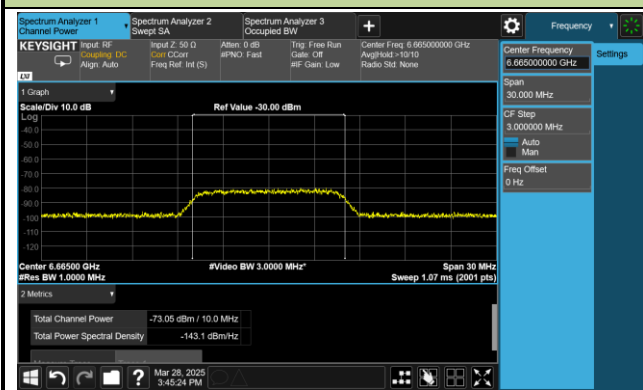


802.11be-EHT160 / CH143 (High Edge)

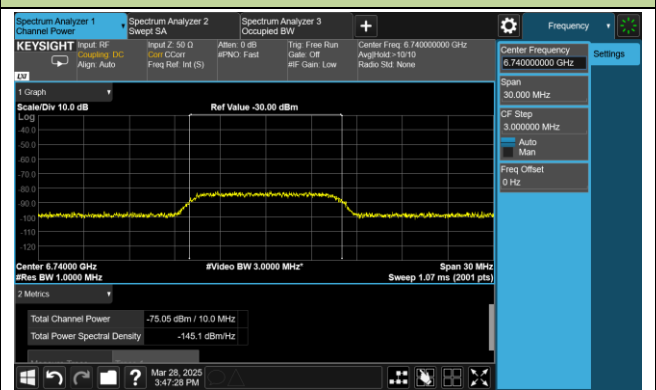


Incumbent Signal Calibration Plots (NII-8 Band)


802.11be-EHT20 / CH193

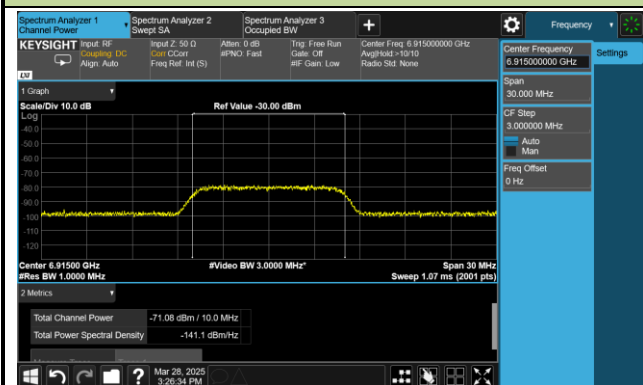


802.11be-EHT160 / CH207 (Low Edge)

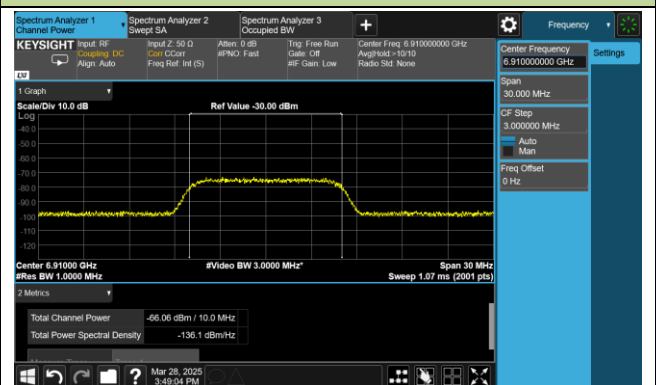

802.11be-EHT160 / CH207 (Middle)

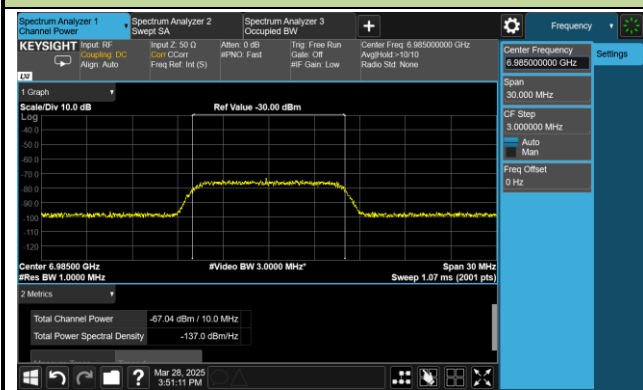


802.11be-EHT160 / CH207 (High Edge)

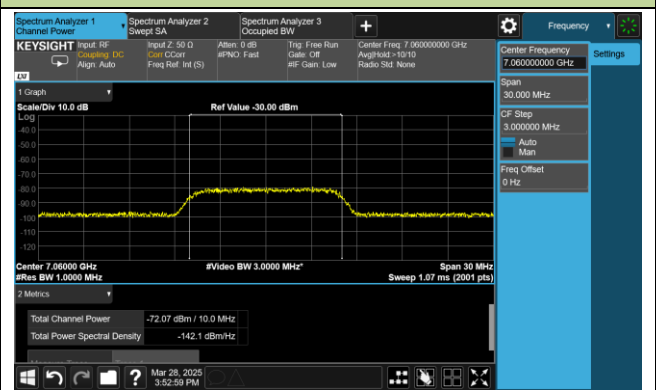


Test Result of EUT ceased transmission (NII-5 Band)


802.11be-EHT20 / CH1

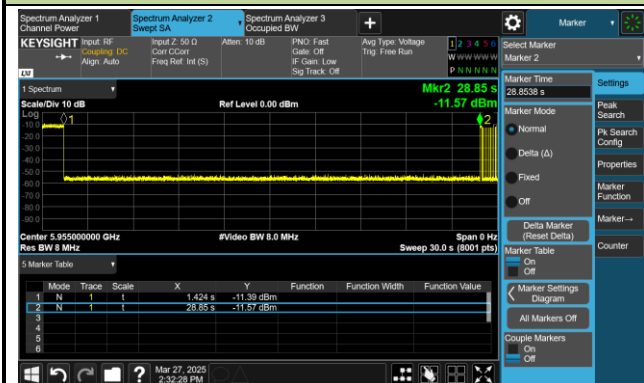


802.11be-EHT160 / CH15 (Low Edge)

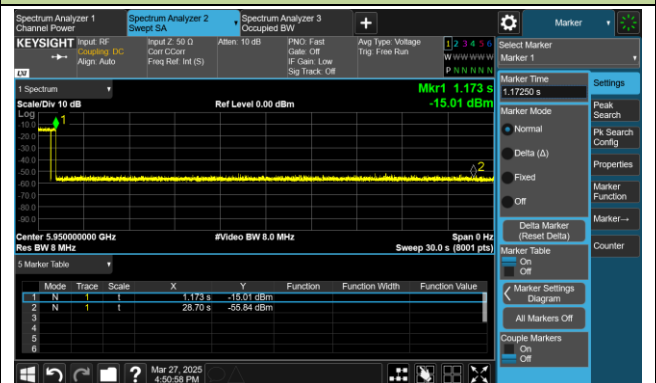

802.11be-EHT160 / CH15 (Middle)

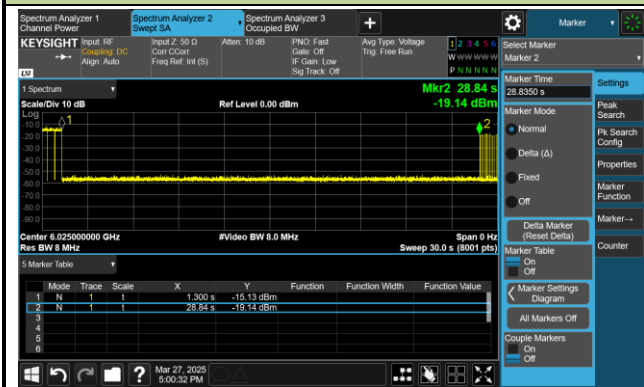


802.11be-EHT160 / CH15 (High Edge)

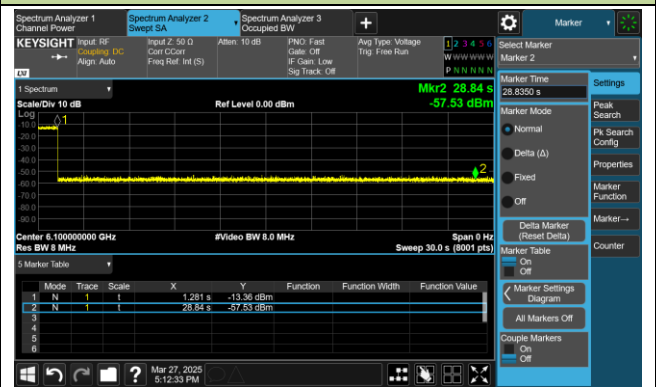


Test Result of EUT ceased transmission (NII-6 Band)


802.11be-EHT20 / CH101

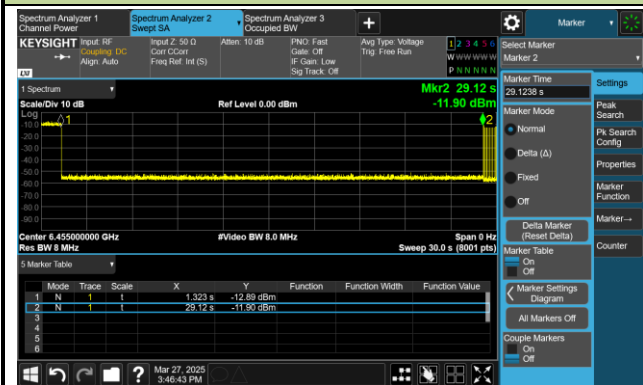


802.11be-EHT160 / CH111 (Low Edge)

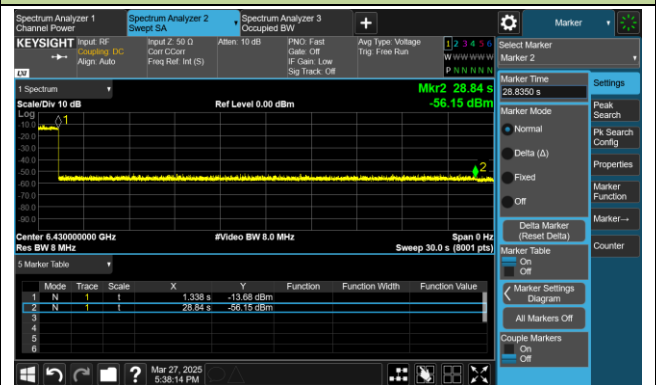

802.11be-EHT160 / CH111 (Middle)

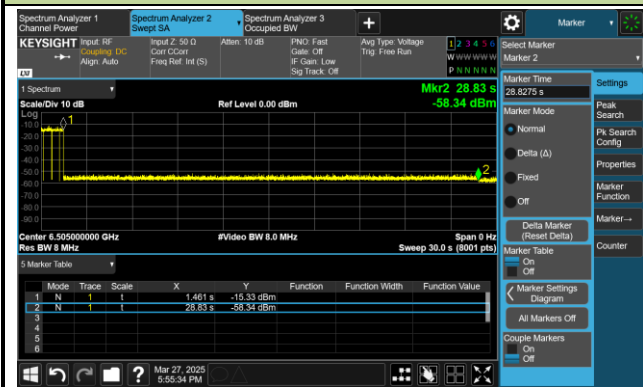


802.11be-EHT160 / CH111 (High Edge)

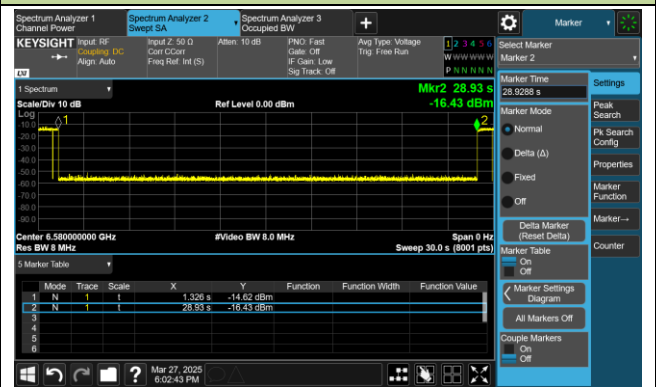


Test Result of EUT ceased transmission (NII-7 Band)


802.11be-EHT20 / CH121

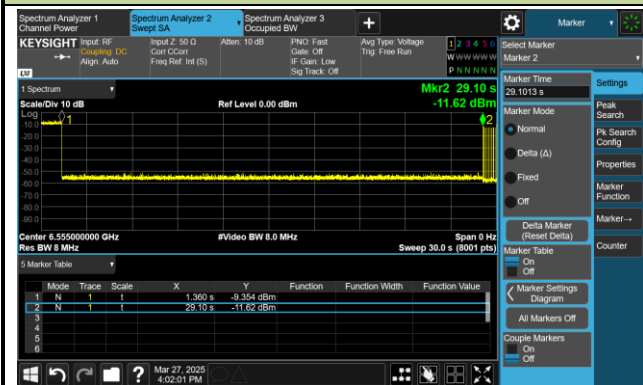


802.11be-EHT160 / CH143 (Low Edge)

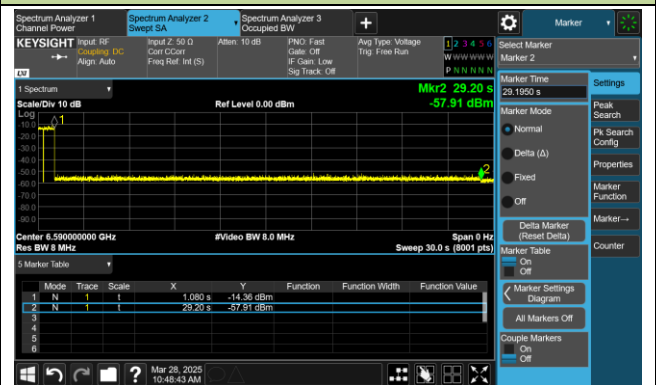

802.11be-EHT160 / CH143 (Middle)

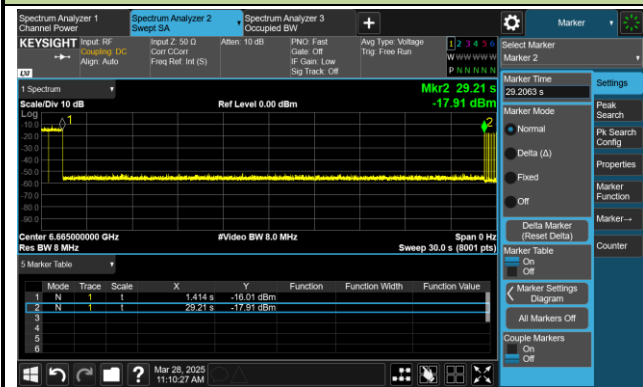


802.11be-EHT160 / CH143 (High Edge)

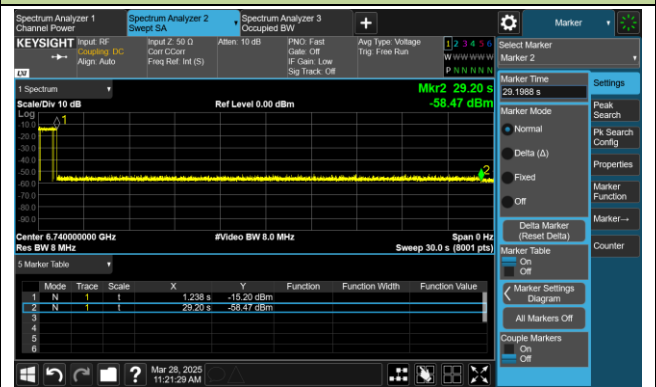


Test Result of EUT ceased transmission (NII-8 Band)


802.11be-EHT20 / CH193

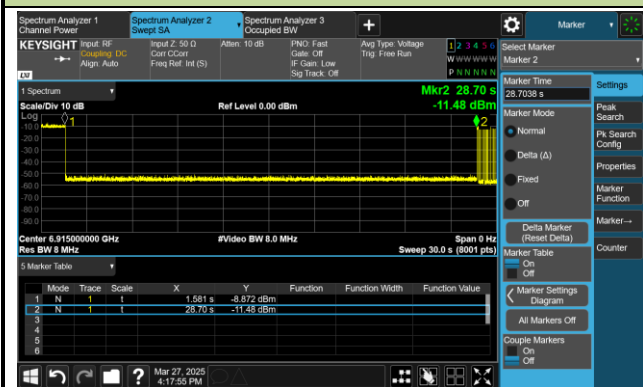


802.11be-EHT160 / CH207 (Low Edge)

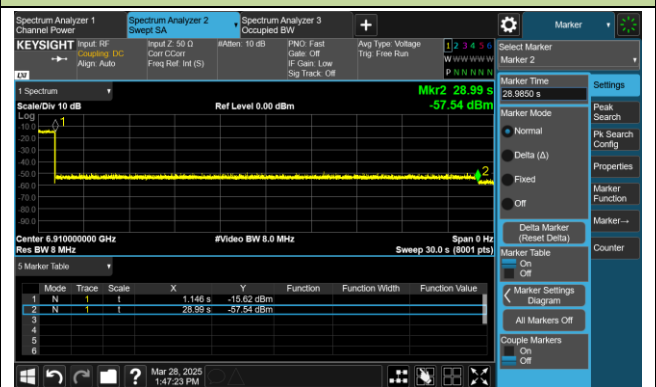

802.11be-EHT160 / CH207 (Middle)

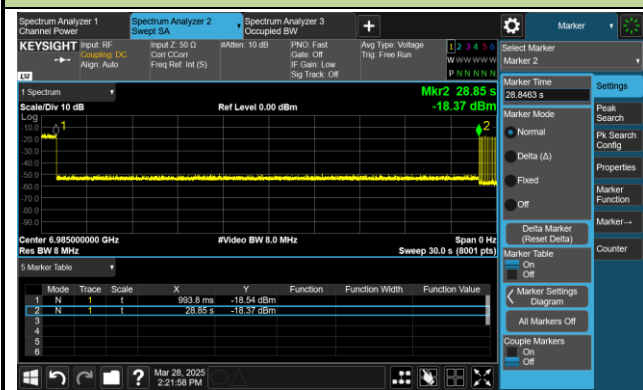

802.11be-EHT160 / CH207 (High Edge)

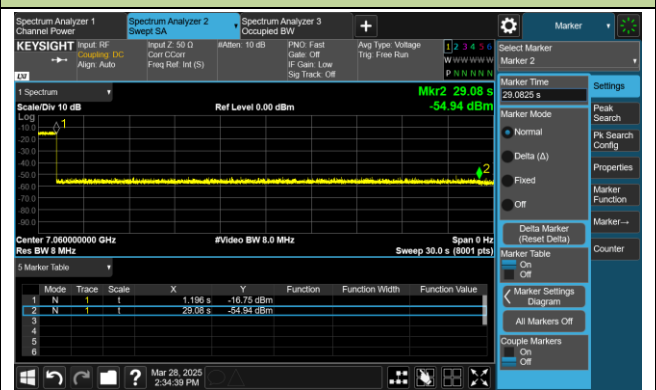

A.8 Radiated Spurious Emission Test Result

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12240.4	29.4	21.0	50.4	74.0	-23.6	Peak	Horizontal
*	13991.4	28.7	22.3	51.0	88.2	-37.2	Peak	Horizontal
*	17083.7	27.5	27.8	55.3	88.2	-32.9	Peak	Horizontal
	17879.3	12.5	29.6	42.1	54.0	-11.9	Average	Horizontal
	17879.3	26.1	29.6	55.7	74.0	-18.3	Peak	Horizontal
	12247.2	27.8	21.0	48.8	74.0	-25.2	Peak	Vertical
*	13746.6	28.2	21.9	50.1	88.2	-38.1	Peak	Vertical
*	16871.2	26.0	28.1	54.1	88.2	-34.1	Peak	Vertical
	17823.2	12.3	29.6	41.9	54.0	-12.1	Average	Vertical
	17823.2	25.4	29.6	55.0	74.0	-19.0	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11679.4	28.5	19.5	48.0	74.0	-26.0	Peak	Horizontal
*	14829.5	28.0	23.1	51.1	88.2	-37.1	Peak	Horizontal
*	16963.0	26.9	28.2	55.1	88.2	-33.1	Peak	Horizontal
	17976.2	12.5	29.6	42.1	54.0	-11.9	Average	Horizontal
	17976.2	25.7	29.6	55.3	74.0	-18.7	Peak	Horizontal
	12277.8	28.8	20.9	49.7	74.0	-24.3	Peak	Vertical
*	13982.9	28.0	22.1	50.1	88.2	-38.1	Peak	Vertical
*	16939.2	27.2	27.8	55.0	88.2	-33.2	Peak	Vertical
	17775.6	13.3	29.1	42.4	54.0	-11.6	Average	Vertical
	17775.6	25.7	29.1	54.8	74.0	-19.2	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE20 (Nss = 1)	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11223.8	29.2	18.7	47.9	74.0	-26.1	Peak	Horizontal
*	14878.8	28.3	22.9	51.2	88.2	-37.0	Peak	Horizontal
*	16976.6	27.1	28.0	55.1	88.2	-33.1	Peak	Horizontal
	17881.0	12.4	29.4	41.8	54.0	-12.2	Average	Horizontal
	17881.0	26.5	29.4	55.9	74.0	-18.1	Peak	Horizontal
	11891.9	28.4	20.2	48.6	74.0	-25.4	Peak	Vertical
*	14792.1	28.1	23.2	51.3	88.2	-36.9	Peak	Vertical
*	17435.6	27.0	28.9	55.9	88.2	-32.3	Peak	Vertical
	17977.9	12.5	29.6	42.1	54.0	-11.9	Average	Vertical
	17977.9	25.0	29.6	54.6	74.0	-19.4	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE20	Test Channel	97
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11711.7	28.9	19.6	48.5	74.0	-25.5	Peak	Horizontal
*	15135.5	29.1	23.2	52.3	88.2	-35.9	Peak	Horizontal
*	17099.0	27.3	27.7	55.0	88.2	-33.2	Peak	Horizontal
	17875.9	12.4	29.7	42.1	54.0	-11.9	Average	Horizontal
	17875.9	25.6	29.7	55.3	74.0	-18.7	Peak	Horizontal
	12192.8	28.5	20.8	49.3	74.0	-24.7	Peak	Vertical
*	14849.9	28.4	23.1	51.5	88.2	-36.7	Peak	Vertical
*	16872.9	26.9	28.1	55.0	88.2	-33.2	Peak	Vertical
	18000.0	12.7	28.4	41.1	54.0	-12.9	Average	Vertical
	18000.0	24.4	28.4	52.8	74.0	-21.2	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE20	Test Channel	105
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11682.8	28.5	19.5	48.0	74.0	-26.0	Peak	Horizontal
*	12860.9	28.1	22.6	50.7	88.2	-37.5	Peak	Horizontal
*	16742.0	26.6	28.0	54.6	88.2	-33.6	Peak	Horizontal
	17966.0	12.6	29.0	41.6	54.0	-12.4	Average	Horizontal
	17966.0	24.4	29.0	53.4	74.0	-20.6	Peak	Horizontal
	11201.7	29.3	18.6	47.9	74.0	-26.1	Peak	Vertical
*	14761.5	28.0	22.8	50.8	88.2	-37.4	Peak	Vertical
*	16971.5	26.2	28.2	54.4	88.2	-33.8	Peak	Vertical
	17864.0	12.5	29.3	41.8	54.0	-12.2	Average	Vertical
	17864.0	26.3	29.3	55.6	74.0	-18.4	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE20	Test Channel	113
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12209.8	27.9	20.8	48.7	74.0	-25.3	Peak	Horizontal
*	14928.1	27.6	23.1	50.7	88.2	-37.5	Peak	Horizontal
*	17017.4	26.5	27.9	54.4	88.2	-33.8	Peak	Horizontal
	17976.2	12.7	29.6	42.3	54.0	-11.7	Average	Horizontal
	17976.2	25.5	29.6	55.1	74.0	-18.9	Peak	Horizontal
	11920.8	28.1	20.1	48.2	74.0	-25.8	Peak	Vertical
*	14800.6	28.1	23.2	51.3	88.2	-36.9	Peak	Vertical
*	16963.0	27.0	28.2	55.2	88.2	-33.0	Peak	Vertical
	17981.3	12.4	29.8	42.2	54.0	-11.8	Average	Vertical
	17981.3	25.5	29.8	55.3	74.0	-18.7	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12221.7	28.4	20.8	49.2	74.0	-24.8	Peak	Horizontal
*	14894.1	28.6	23.1	51.7	88.2	-36.5	Peak	Horizontal
*	16804.9	27.0	28.1	55.1	88.2	-33.1	Peak	Horizontal
	17874.2	12.4	29.6	42.0	54.0	-12.0	Average	Horizontal
	17874.2	24.3	29.6	53.9	74.0	-20.1	Peak	Horizontal
	11732.1	28.3	19.6	47.9	74.0	-26.1	Peak	Vertical
*	14754.7	28.2	22.9	51.1	88.2	-37.1	Peak	Vertical
*	16912.0	26.5	28.1	54.6	88.2	-33.6	Peak	Vertical
	17981.3	12.4	29.8	42.2	54.0	-11.8	Average	Vertical
	17981.3	25.5	29.8	55.3	74.0	-18.7	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE20	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11847.7	28.0	19.9	47.9	74.0	-26.1	Peak	Horizontal
*	14098.5	27.3	22.4	49.7	88.2	-38.5	Peak	Horizontal
*	16857.6	26.0	28.3	54.3	88.2	-33.9	Peak	Horizontal
	17977.9	12.1	29.6	41.7	54.0	-12.3	Average	Horizontal
	17977.9	25.7	29.6	55.3	74.0	-18.7	Peak	Horizontal
	11728.7	28.1	19.6	47.7	74.0	-26.3	Peak	Vertical
*	12905.1	28.1	22.6	50.7	88.2	-37.5	Peak	Vertical
*	16969.8	26.7	28.2	54.9	88.2	-33.3	Peak	Vertical
	17977.9	12.3	29.6	41.9	54.0	-12.1	Average	Vertical
	17977.9	25.4	29.6	55.0	74.0	-19.0	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11698.1	28.3	19.5	47.8	74.0	-26.2	Peak	Horizontal
*	14695.2	28.8	23.0	51.8	88.2	-36.4	Peak	Horizontal
*	17024.2	26.6	27.9	54.5	88.2	-33.7	Peak	Horizontal
	17864.0	12.2	29.3	41.5	54.0	-12.5	Average	Horizontal
	17864.0	25.9	29.3	55.2	74.0	-18.8	Peak	Horizontal
	11812.0	28.6	19.8	48.4	74.0	-25.6	Peak	Vertical
*	14275.3	28.9	22.3	51.2	88.2	-37.0	Peak	Vertical
*	16844.0	27.0	28.1	55.1	88.2	-33.1	Peak	Vertical
	17821.5	12.2	29.5	41.7	54.0	-12.3	Average	Vertical
	17821.5	25.5	29.5	55.0	74.0	-19.0	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE20	Test Channel	185
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12129.9	27.9	20.7	48.6	74.0	-25.4	Peak	Horizontal
*	14843.1	28.1	23.1	51.2	88.2	-37.0	Peak	Horizontal
*	16913.7	27.1	28.1	55.2	88.2	-33.0	Peak	Horizontal
	17821.5	12.4	29.5	41.9	54.0	-12.1	Average	Horizontal
	17821.5	26.0	29.5	55.5	74.0	-18.5	Peak	Horizontal
	11121.8	29.3	18.6	47.9	74.0	-26.1	Peak	Vertical
*	14849.9	27.7	23.1	50.8	88.2	-37.4	Peak	Vertical
*	16784.5	26.8	27.9	54.7	88.2	-33.5	Peak	Vertical
	17977.9	12.4	29.6	42.0	54.0	-12.0	Average	Vertical
	17977.9	25.7	29.6	55.3	74.0	-18.7	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE20	Test Channel	189
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11886.8	28.5	20.1	48.6	74.0	-25.4	Peak	Horizontal
*	14158.0	28.4	22.2	50.6	88.2	-37.6	Peak	Horizontal
*	16784.5	27.2	27.9	55.1	88.2	-33.1	Peak	Horizontal
	17930.3	12.5	29.4	41.9	54.0	-12.1	Average	Horizontal
	17930.3	25.9	29.4	55.3	74.0	-18.7	Peak	Horizontal
	11795.0	28.3	19.8	48.1	74.0	-25.9	Peak	Vertical
*	14919.6	28.0	23.1	51.1	88.2	-37.1	Peak	Vertical
*	16769.2	26.9	28.2	55.1	88.2	-33.1	Peak	Vertical
	17870.8	12.3	29.5	41.8	54.0	-12.2	Average	Vertical
	17870.8	25.4	29.5	54.9	74.0	-19.1	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE20	Test Channel	209
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11669.2	28.4	19.6	48.0	74.0	-26.0	Peak	Horizontal
*	14647.6	28.4	22.9	51.3	88.2	-36.9	Peak	Horizontal
*	17093.9	27.2	27.7	54.9	88.2	-33.3	Peak	Horizontal
	17979.6	12.5	29.7	42.2	54.0	-11.8	Average	Horizontal
	17979.6	25.5	29.7	55.2	74.0	-18.8	Peak	Horizontal
	11247.6	29.5	18.6	48.1	74.0	-25.9	Peak	Vertical
*	13938.7	27.5	22.2	49.7	88.2	-38.5	Peak	Vertical
*	16861.0	26.3	28.3	54.6	88.2	-33.6	Peak	Vertical
	17984.7	12.6	29.7	42.3	54.0	-11.7	Average	Vertical
	17984.7	25.3	29.7	55.0	74.0	-19.0	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE20	Test Channel	229
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11228.9	29.0	18.7	47.7	74.0	-26.3	Peak	Horizontal
*	14773.4	28.4	22.9	51.3	88.2	-36.9	Peak	Horizontal
*	16854.2	26.7	28.3	55.0	88.2	-33.2	Peak	Horizontal
	17877.6	12.7	29.7	42.4	54.0	-11.6	Average	Horizontal
	17877.6	26.0	29.7	55.7	74.0	-18.3	Peak	Horizontal
	11572.3	28.8	19.2	48.0	74.0	-26.0	Peak	Vertical
*	14856.7	28.5	23.0	51.5	88.2	-36.7	Peak	Vertical
*	16934.1	26.3	27.8	54.1	88.2	-34.1	Peak	Vertical
	17874.2	12.4	29.6	42.0	54.0	-12.0	Average	Vertical
	17874.2	23.9	29.6	53.5	74.0	-20.5	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11772.9	28.4	19.7	48.1	74.0	-25.9	Peak	Horizontal
*	14336.5	28.8	22.5	51.3	88.2	-36.9	Peak	Horizontal
*	17224.8	26.7	28.0	54.7	88.2	-33.5	Peak	Horizontal
	17877.6	12.5	29.7	42.2	54.0	-11.8	Average	Horizontal
	17877.6	25.4	29.7	55.1	74.0	-18.9	Peak	Horizontal
	11312.2	28.4	18.8	47.2	74.0	-26.8	Peak	Vertical
*	12966.3	27.5	22.9	50.4	88.2	-37.8	Peak	Vertical
*	16957.9	26.9	28.1	55.0	88.2	-33.2	Peak	Vertical
	17813.0	12.4	29.3	41.7	54.0	-12.3	Average	Vertical
	17813.0	25.9	29.3	55.2	74.0	-18.8	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11568.9	28.4	19.3	47.7	74.0	-26.3	Peak	Horizontal
*	14970.6	28.6	22.9	51.5	88.2	-36.7	Peak	Horizontal
*	16867.8	26.6	28.2	54.8	88.2	-33.4	Peak	Horizontal
	17821.5	12.7	29.5	42.2	54.0	-11.8	Average	Horizontal
	17821.5	25.5	29.5	55.0	74.0	-19.0	Peak	Horizontal
	11291.8	29.4	18.6	48.0	74.0	-26.0	Peak	Vertical
*	15050.5	29.1	23.1	52.2	88.2	-36.0	Peak	Vertical
*	16963.0	26.7	28.2	54.9	88.2	-33.3	Peak	Vertical
	17983.0	12.6	29.9	42.5	54.0	-11.5	Average	Vertical
	17983.0	25.2	29.9	55.1	74.0	-18.9	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11832.4	27.8	19.9	47.7	74.0	-26.3	Peak	Horizontal
*	14783.6	29.1	23.0	52.1	88.2	-36.1	Peak	Horizontal
*	16910.3	27.0	28.0	55.0	88.2	-33.2	Peak	Horizontal
	17967.7	12.6	29.1	41.7	54.0	-12.3	Average	Horizontal
	17967.7	25.8	29.1	54.9	74.0	-19.1	Peak	Horizontal
	11657.3	28.6	19.5	48.1	74.0	-25.9	Peak	Vertical
*	14979.1	28.4	22.9	51.3	88.2	-36.9	Peak	Vertical
*	17493.4	26.4	29.3	55.7	88.2	-32.5	Peak	Vertical
	17921.8	12.3	29.1	41.4	54.0	-12.6	Average	Vertical
	17921.8	25.6	29.1	54.7	74.0	-19.3	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE40	Test Channel	99
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12240.4	28.0	21.0	49.0	74.0	-25.0	Peak	Horizontal
*	14865.2	27.8	23.0	50.8	88.2	-37.4	Peak	Horizontal
*	17306.4	28.0	27.8	55.8	88.2	-32.4	Peak	Horizontal
	17920.1	12.3	29.1	41.4	54.0	-12.6	Average	Horizontal
	17920.1	23.3	29.1	52.4	74.0	-21.6	Peak	Horizontal
	11703.2	28.7	19.5	48.2	74.0	-25.8	Peak	Vertical
*	14853.3	27.9	23.1	51.0	88.2	-37.2	Peak	Vertical
*	16589.0	26.8	27.6	54.4	88.2	-33.8	Peak	Vertical
	17920.1	12.4	29.1	41.5	54.0	-12.5	Average	Vertical
	17920.1	23.3	29.1	52.4	74.0	-21.6	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE40	Test Channel	107
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11582.5	28.3	19.2	47.5	74.0	-26.5	Peak	Horizontal
*	14824.4	29.2	23.2	52.4	88.2	-35.8	Peak	Horizontal
*	16971.5	26.2	28.2	54.4	88.2	-33.8	Peak	Horizontal
	17983.0	12.3	29.9	42.2	54.0	-11.8	Average	Horizontal
	17983.0	25.2	29.9	55.1	74.0	-18.9	Peak	Horizontal
	12036.4	27.4	20.5	47.9	74.0	-26.1	Peak	Vertical
*	14754.7	28.8	22.9	51.7	88.2	-36.5	Peak	Vertical
*	17212.9	26.7	28.0	54.7	88.2	-33.5	Peak	Vertical
	17972.8	12.3	29.4	41.7	54.0	-12.3	Average	Vertical
	17972.8	24.9	29.4	54.3	74.0	-19.7	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE40	Test Channel	115
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11829.0	28.3	19.8	48.1	74.0	-25.9	Peak	Horizontal
*	13780.6	27.6	22.4	50.0	88.2	-38.2	Peak	Horizontal
*	17430.5	26.9	28.6	55.5	88.2	-32.7	Peak	Horizontal
	17874.2	12.7	29.6	42.3	54.0	-11.7	Average	Horizontal
	17874.2	24.5	29.6	54.1	74.0	-19.9	Peak	Horizontal
	12187.7	28.1	20.8	48.9	74.0	-25.1	Peak	Vertical
*	14781.9	28.1	23.0	51.1	88.2	-37.1	Peak	Vertical
*	16913.7	26.5	28.1	54.6	88.2	-33.6	Peak	Vertical
	17884.4	12.5	29.1	41.6	54.0	-12.4	Average	Vertical
	17884.4	25.7	29.1	54.8	74.0	-19.2	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11737.2	28.6	19.6	48.2	74.0	-25.8	Peak	Horizontal
*	14805.7	27.7	23.2	50.9	88.2	-37.3	Peak	Horizontal
*	16974.9	26.7	28.1	54.8	88.2	-33.4	Peak	Horizontal
	17966.0	12.4	29.0	41.4	54.0	-12.6	Average	Horizontal
	17966.0	25.7	29.0	54.7	74.0	-19.3	Peak	Horizontal
	11876.6	28.4	20.0	48.4	74.0	-25.6	Peak	Vertical
*	14882.2	28.7	22.9	51.6	88.2	-36.6	Peak	Vertical
*	16915.4	26.1	28.1	54.2	88.2	-34.0	Peak	Vertical
	17920.1	12.4	29.1	41.5	54.0	-12.5	Average	Vertical
	17920.1	23.9	29.1	53.0	74.0	-21.0	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12204.7	28.5	20.8	49.3	74.0	-24.7	Peak	Horizontal
*	14950.2	28.3	23.2	51.5	88.2	-36.7	Peak	Horizontal
*	16908.6	27.5	28.0	55.5	88.2	-32.7	Peak	Horizontal
	17821.5	12.3	29.5	41.8	54.0	-12.2	Average	Horizontal
	17821.5	26.6	29.5	56.1	74.0	-17.9	Peak	Horizontal
	11184.7	28.4	18.5	46.9	74.0	-27.1	Peak	Vertical
*	14856.7	28.0	23.0	51.0	88.2	-37.2	Peak	Vertical
*	16976.6	27.2	28.0	55.2	88.2	-33.0	Peak	Vertical
	17879.3	12.1	29.6	41.7	54.0	-12.3	Average	Vertical
	17879.3	25.9	29.6	55.5	74.0	-18.5	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11796.7	28.5	19.8	48.3	74.0	-25.7	Peak	Horizontal
*	14268.5	28.9	22.4	51.3	88.2	-36.9	Peak	Horizontal
*	17027.6	27.0	27.8	54.8	88.2	-33.4	Peak	Horizontal
	17984.7	12.2	29.7	41.9	54.0	-12.1	Average	Horizontal
	17984.7	25.0	29.7	54.7	74.0	-19.3	Peak	Horizontal
	12055.1	27.9	20.5	48.4	74.0	-25.6	Peak	Vertical
*	14894.1	28.2	23.1	51.3	88.2	-36.9	Peak	Vertical
*	16871.2	26.4	28.1	54.5	88.2	-33.7	Peak	Vertical
	17821.5	12.3	29.5	41.8	54.0	-12.2	Average	Vertical
	17821.5	25.9	29.5	55.4	74.0	-18.6	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE40	Test Channel	187
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11472.0	28.9	19.0	47.9	74.0	-26.1	Peak	Horizontal
*	15082.8	27.9	23.0	50.9	88.2	-37.3	Peak	Horizontal
*	16874.6	26.2	28.0	54.2	88.2	-34.0	Peak	Horizontal
	17869.1	12.1	29.4	41.5	54.0	-12.5	Average	Horizontal
	17869.1	23.8	29.4	53.2	74.0	-20.8	Peak	Horizontal
	11720.2	28.6	19.6	48.2	74.0	-25.8	Peak	Vertical
*	14764.9	28.3	22.8	51.1	88.2	-37.1	Peak	Vertical
*	16714.8	26.9	28.2	55.1	88.2	-33.1	Peak	Vertical
	17865.7	12.1	29.3	41.4	54.0	-12.6	Average	Vertical
	17865.7	26.2	29.3	55.5	74.0	-18.5	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE40	Test Channel	195
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10802.2	30.0	18.1	48.1	74.0	-25.9	Peak	Horizontal
*	14938.3	27.8	23.2	51.0	88.2	-37.2	Peak	Horizontal
*	17008.9	26.9	27.8	54.7	88.2	-33.5	Peak	Horizontal
	17916.7	12.1	28.9	41.0	54.0	-13.0	Average	Horizontal
	17916.7	25.4	28.9	54.3	74.0	-19.7	Peak	Horizontal
	11779.7	28.4	19.7	48.1	74.0	-25.9	Peak	Vertical
*	14827.8	28.3	23.2	51.5	88.2	-36.7	Peak	Vertical
*	16842.3	26.4	28.1	54.5	88.2	-33.7	Peak	Vertical
	17981.3	12.1	29.8	41.9	54.0	-12.1	Average	Vertical
	17981.3	25.5	29.8	55.3	74.0	-18.7	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE40	Test Channel	211
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12019.4	28.7	20.4	49.1	74.0	-24.9	Peak	Horizontal
*	14860.1	29.0	23.0	52.0	88.2	-36.2	Peak	Horizontal
*	16942.6	26.0	27.9	53.9	88.2	-34.3	Peak	Horizontal
	17879.3	12.6	29.6	42.2	54.0	-11.8	Average	Horizontal
	17879.3	25.4	29.6	55.0	74.0	-19.0	Peak	Horizontal
	11643.7	28.6	19.4	48.0	74.0	-26.0	Peak	Vertical
*	14907.7	27.7	23.2	50.9	88.2	-37.3	Peak	Vertical
*	17496.8	26.4	29.1	55.5	88.2	-32.7	Peak	Vertical
	17818.1	12.5	29.4	41.9	54.0	-12.1	Average	Vertical
	17818.1	26.3	29.4	55.7	74.0	-18.3	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE40	Test Channel	227
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11715.1	28.3	19.6	47.9	74.0	-26.1	Peak	Horizontal
*	15052.2	27.9	23.1	51.0	88.2	-37.2	Peak	Horizontal
*	16956.2	26.2	28.1	54.3	88.2	-33.9	Peak	Horizontal
	17984.7	12.2	29.7	41.9	54.0	-12.1	Average	Horizontal
	17984.7	24.8	29.7	54.5	74.0	-19.5	Peak	Horizontal
	11849.4	28.9	19.9	48.8	74.0	-25.2	Peak	Vertical
*	13629.3	27.7	22.2	49.9	88.2	-38.3	Peak	Vertical
*	17054.8	26.7	27.8	54.5	88.2	-33.7	Peak	Vertical
	17867.4	12.1	29.4	41.5	54.0	-12.5	Average	Vertical
	17867.4	25.0	29.4	54.4	74.0	-19.6	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11721.9	28.5	19.6	48.1	74.0	-25.9	Peak	Horizontal
*	13083.6	27.8	22.8	50.6	88.2	-37.6	Peak	Horizontal
*	16820.2	26.4	28.1	54.5	88.2	-33.7	Peak	Horizontal
	17870.8	12.2	29.5	41.7	54.0	-12.3	Average	Horizontal
	17870.8	25.5	29.5	55.0	74.0	-19.0	Peak	Horizontal
	12206.4	27.7	20.8	48.5	74.0	-25.5	Peak	Vertical
*	13965.9	27.0	22.1	49.1	88.2	-39.1	Peak	Vertical
*	17075.2	26.5	28.0	54.5	88.2	-33.7	Peak	Vertical
	17977.9	12.4	29.6	42.0	54.0	-12.0	Average	Vertical
	17977.9	24.9	29.6	54.5	74.0	-19.5	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12158.8	28.4	20.8	49.2	74.0	-24.8	Peak	Horizontal
*	14926.4	28.4	23.1	51.5	88.2	-36.7	Peak	Horizontal
*	16961.3	26.4	28.2	54.6	88.2	-33.6	Peak	Horizontal
	17818.1	12.1	29.4	41.5	54.0	-12.5	Average	Horizontal
	17818.1	25.9	29.4	55.3	74.0	-18.7	Peak	Horizontal
	11856.2	27.7	19.9	47.6	74.0	-26.4	Peak	Vertical
*	14948.5	28.2	23.2	51.4	88.2	-36.8	Peak	Vertical
*	16869.5	26.0	28.2	54.2	88.2	-34.0	Peak	Vertical
	17981.3	12.2	29.8	42.0	54.0	-12.0	Average	Vertical
	17981.3	25.1	29.8	54.9	74.0	-19.1	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-11
Test Mode	802.11ax-HE80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11514.5	29.4	19.1	48.5	74.0	-25.5	Peak	Horizontal
*	13522.2	28.5	22.3	50.8	88.2	-37.4	Peak	Horizontal
*	17107.5	26.8	27.7	54.5	88.2	-33.7	Peak	Horizontal
	17867.4	12.3	29.4	41.7	54.0	-12.3	Average	Horizontal
	17867.4	25.5	29.4	54.9	74.0	-19.1	Peak	Horizontal
	11657.3	28.6	19.5	48.1	74.0	-25.9	Peak	Vertical
*	14946.8	28.3	23.2	51.5	88.2	-36.7	Peak	Vertical
*	16859.3	26.4	28.3	54.7	88.2	-33.5	Peak	Vertical
	17979.6	12.1	29.7	41.8	54.0	-12.2	Average	Vertical
	17979.6	25.1	29.7	54.8	74.0	-19.2	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-15
Test Mode	802.11ax-HE80	Test Channel	103
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11621.6	28.7	19.3	48.0	74.0	-26.0	Peak	Horizontal
*	14861.8	28.7	23.0	51.7	88.2	-36.5	Peak	Horizontal
*	17027.6	27.0	27.8	54.8	88.2	-33.4	Peak	Horizontal
	17979.6	12.3	29.7	42.0	54.0	-12.0	Average	Horizontal
	17979.6	25.5	29.7	55.2	74.0	-18.8	Peak	Horizontal
	11808.6	28.4	19.8	48.2	74.0	-25.8	Peak	Vertical
*	14756.4	29.7	22.9	52.6	88.2	-35.6	Peak	Vertical
*	16862.7	26.0	28.4	54.4	88.2	-33.8	Peak	Vertical
	17872.5	12.6	29.6	42.2	54.0	-11.8	Average	Vertical
	17872.5	25.9	29.6	55.5	74.0	-18.5	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-15
Test Mode	802.11ax-HE80	Test Channel	119
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12043.2	28.2	20.5	48.7	74.0	-25.3	Peak	Horizontal
*	14934.9	28.4	23.2	51.6	88.2	-36.6	Peak	Horizontal
*	16872.9	26.6	28.1	54.7	88.2	-33.5	Peak	Horizontal
	17875.9	12.5	29.7	42.2	54.0	-11.8	Average	Horizontal
	17875.9	25.8	29.7	55.5	74.0	-18.5	Peak	Horizontal
	12483.5	27.4	21.5	48.9	74.0	-25.1	Peak	Vertical
*	14790.4	28.5	23.1	51.6	88.2	-36.6	Peak	Vertical
*	16857.6	26.1	28.3	54.4	88.2	-33.8	Peak	Vertical
	17874.2	12.4	29.6	42.0	54.0	-12.0	Average	Vertical
	17874.2	25.7	29.6	55.3	74.0	-18.7	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-15
Test Mode	802.11ax-HE80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12322.0	27.7	21.0	48.7	74.0	-25.3	Peak	Horizontal
*	14957.0	27.9	23.1	51.0	88.2	-37.2	Peak	Horizontal
*	16961.3	27.0	28.2	55.2	88.2	-33.0	Peak	Horizontal
	17826.6	12.6	29.5	42.1	54.0	-11.9	Average	Horizontal
	17826.6	25.6	29.5	55.1	74.0	-18.9	Peak	Horizontal
	11699.8	28.8	19.5	48.3	74.0	-25.7	Peak	Vertical
*	14873.7	28.0	22.9	50.9	88.2	-37.3	Peak	Vertical
*	17078.6	27.1	27.9	55.0	88.2	-33.2	Peak	Vertical
	17862.3	12.7	29.2	41.9	54.0	-12.1	Average	Vertical
	17862.3	26.9	29.2	56.1	74.0	-17.9	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-15
Test Mode	802.11ax-HE80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12328.8	27.7	21.0	48.7	74.0	-25.3	Peak	Horizontal
*	14897.5	28.2	23.1	51.3	88.2	-36.9	Peak	Horizontal
*	16881.4	27.1	27.9	55.0	88.2	-33.2	Peak	Horizontal
	17925.2	12.8	29.3	42.1	54.0	-11.9	Average	Horizontal
	17925.2	25.9	29.3	55.2	74.0	-18.8	Peak	Horizontal
	12084.0	28.3	20.5	48.8	74.0	-25.2	Peak	Vertical
*	14764.9	28.9	22.8	51.7	88.2	-36.5	Peak	Vertical
*	16918.8	26.6	28.1	54.7	88.2	-33.5	Peak	Vertical
	17862.3	12.6	29.2	41.8	54.0	-12.2	Average	Vertical
	17862.3	26.3	29.2	55.5	74.0	-18.5	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-15
Test Mode	802.11ax-HE80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12197.9	27.6	20.8	48.4	74.0	-25.6	Peak	Horizontal
*	14950.2	28.0	23.2	51.2	88.2	-37.0	Peak	Horizontal
*	17039.5	27.3	27.7	55.0	88.2	-33.2	Peak	Horizontal
	17979.6	12.7	29.7	42.4	54.0	-11.6	Average	Horizontal
	17979.6	25.6	29.7	55.3	74.0	-18.7	Peak	Horizontal
	12614.4	27.8	21.9	49.7	74.0	-24.3	Peak	Vertical
*	15166.1	28.7	23.3	52.0	88.2	-36.2	Peak	Vertical
*	17061.6	27.0	27.9	54.9	88.2	-33.3	Peak	Vertical
	17981.3	12.5	29.8	42.3	54.0	-11.7	Average	Vertical
	17981.3	25.6	29.8	55.4	74.0	-18.6	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-15
Test Mode	802.11ax-HE80	Test Channel	183
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12204.7	28.3	20.8	49.1	74.0	-24.9	Peak	Horizontal
*	14889.0	27.9	23.0	50.9	88.2	-37.3	Peak	Horizontal
*	16998.7	26.7	27.7	54.4	88.2	-33.8	Peak	Horizontal
	17979.6	12.6	29.7	42.3	54.0	-11.7	Average	Horizontal
	17979.6	25.4	29.7	55.1	74.0	-18.9	Peak	Horizontal
	12379.8	27.4	21.2	48.6	74.0	-25.4	Peak	Vertical
*	15053.9	28.4	23.2	51.6	88.2	-36.6	Peak	Vertical
*	17498.5	26.3	29.0	55.3	88.2	-32.9	Peak	Vertical
	17874.2	12.4	29.6	42.0	54.0	-12.0	Average	Vertical
	17874.2	25.9	29.6	55.5	74.0	-18.5	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-15
Test Mode	802.11ax-HE80	Test Channel	199
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12043.2	28.3	20.5	48.8	74.0	-25.2	Peak	Horizontal
*	14875.4	28.9	22.9	51.8	88.2	-36.4	Peak	Horizontal
*	16910.3	27.6	28.0	55.6	88.2	-32.6	Peak	Horizontal
	17984.7	12.5	29.7	42.2	54.0	-11.8	Average	Horizontal
	17984.7	24.9	29.7	54.6	74.0	-19.4	Peak	Horizontal
	12186.0	28.4	20.8	49.2	74.0	-24.8	Peak	Vertical
*	14863.5	28.4	23.0	51.4	88.2	-36.8	Peak	Vertical
*	16980.0	27.2	28.0	55.2	88.2	-33.0	Peak	Vertical
	17819.8	12.9	29.5	42.4	54.0	-11.6	Average	Vertical
	17819.8	25.9	29.5	55.4	74.0	-18.6	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-15
Test Mode	802.11ax-HE80	Test Channel	215
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12046.6	27.6	20.5	48.1	74.0	-25.9	Peak	Horizontal
*	13920.0	28.4	21.9	50.3	88.2	-37.9	Peak	Horizontal
*	16912.0	27.0	28.1	55.1	88.2	-33.1	Peak	Horizontal
	17983.0	12.4	29.9	42.3	54.0	-11.7	Average	Horizontal
	17983.0	25.4	29.9	55.3	74.0	-18.7	Peak	Horizontal
	12269.3	27.5	20.9	48.4	74.0	-25.6	Peak	Vertical
*	14868.6	28.2	22.9	51.1	88.2	-37.1	Peak	Vertical
*	17503.6	26.6	28.8	55.4	88.2	-32.8	Peak	Vertical
	17884.4	12.4	29.1	41.5	54.0	-12.5	Average	Vertical
	17884.4	25.9	29.1	55.0	74.0	-19.0	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-15
Test Mode	802.11ax-HE160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11990.5	28.6	20.2	48.8	74.0	-25.2	Peak	Horizontal
*	14766.6	28.8	22.8	51.6	88.2	-36.6	Peak	Horizontal
*	16872.9	26.5	28.1	54.6	88.2	-33.6	Peak	Horizontal
	17981.3	12.5	29.8	42.3	54.0	-11.7	Average	Horizontal
	17981.3	25.0	29.8	54.8	74.0	-19.2	Peak	Horizontal
	11696.4	29.0	19.5	48.5	74.0	-25.5	Peak	Vertical
*	14045.8	28.7	22.2	50.9	88.2	-37.3	Peak	Vertical
*	17003.8	26.9	27.7	54.6	88.2	-33.6	Peak	Vertical
	17870.8	12.6	29.5	42.1	54.0	-11.9	Average	Vertical
	17870.8	26.4	29.5	55.9	74.0	-18.1	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-15
Test Mode	802.11ax-HE160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12177.5	28.0	20.7	48.7	74.0	-25.3	Peak	Horizontal
*	14802.3	28.0	23.2	51.2	88.2	-37.0	Peak	Horizontal
*	17076.9	27.1	28.0	55.1	88.2	-33.1	Peak	Horizontal
	17865.7	12.4	29.3	41.7	54.0	-12.3	Average	Horizontal
	17865.7	25.6	29.3	54.9	74.0	-19.1	Peak	Horizontal
	11786.5	28.3	19.8	48.1	74.0	-25.9	Peak	Vertical
*	14885.6	28.3	22.9	51.2	88.2	-37.0	Peak	Vertical
*	17076.9	26.7	28.0	54.7	88.2	-33.5	Peak	Vertical
	17809.6	12.7	29.2	41.9	54.0	-12.1	Average	Vertical
	17809.6	26.7	29.2	55.9	74.0	-18.1	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-15
Test Mode	802.11ax-HE160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	7930.9	34.7	14.1	48.8	88.2	-39.4	Peak	Horizontal
	11737.2	28.3	19.6	47.9	74.0	-26.1	Peak	Horizontal
*	17484.9	27.2	28.9	56.1	88.2	-32.1	Peak	Horizontal
	17872.5	12.4	29.6	42.0	54.0	-12.0	Average	Horizontal
	17872.5	25.5	29.6	55.1	74.0	-18.9	Peak	Horizontal
*	7930.9	34.4	14.1	48.5	88.2	-39.7	Peak	Vertical
	12303.3	28.0	21.0	49.0	74.0	-25.0	Peak	Vertical
*	17445.8	28.0	28.7	56.7	88.2	-31.5	Peak	Vertical
	17773.9	12.5	29.3	41.8	54.0	-12.2	Average	Vertical
	17773.9	25.5	29.3	54.8	74.0	-19.2	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-15
Test Mode	802.11ax-HE160	Test Channel	111
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12254.0	27.7	21.0	48.7	74.0	-25.3	Peak	Horizontal
*	14962.1	28.1	23.0	51.1	88.2	-37.1	Peak	Horizontal
*	16852.5	26.1	28.2	54.3	88.2	-33.9	Peak	Horizontal
	17872.5	12.6	29.6	42.2	54.0	-11.8	Average	Horizontal
	17872.5	25.9	29.6	55.5	74.0	-18.5	Peak	Horizontal
	12201.3	28.7	20.8	49.5	74.0	-24.5	Peak	Vertical
*	15132.1	28.3	23.2	51.5	88.2	-36.7	Peak	Vertical
*	17331.9	26.8	28.4	55.2	88.2	-33.0	Peak	Vertical
	17870.8	12.5	29.5	42.0	54.0	-12.0	Average	Vertical
	17870.8	25.3	29.5	54.8	74.0	-19.2	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-15
Test Mode	802.11ax-HE160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12429.1	28.7	21.3	50.0	74.0	-24.0	Peak	Horizontal
*	15144.0	28.3	23.2	51.5	88.2	-36.7	Peak	Horizontal
*	16918.8	26.6	28.1	54.7	88.2	-33.5	Peak	Horizontal
	17872.5	12.5	29.6	42.1	54.0	-11.9	Average	Horizontal
	17872.5	25.6	29.6	55.2	74.0	-18.8	Peak	Horizontal
	12344.1	27.4	21.1	48.5	74.0	-25.5	Peak	Vertical
*	15064.1	28.2	23.1	51.3	88.2	-36.9	Peak	Vertical
*	16964.7	27.3	28.2	55.5	88.2	-32.7	Peak	Vertical
	17892.9	12.3	28.3	40.6	54.0	-13.4	Average	Vertical
	17892.9	26.0	28.3	54.3	74.0	-19.7	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-15
Test Mode	802.11ax-HE160	Test Channel	175
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12228.5	28.8	20.8	49.6	74.0	-24.4	Peak	Horizontal
*	14907.7	27.8	23.2	51.0	88.2	-37.2	Peak	Horizontal
*	16963.0	26.6	28.2	54.8	88.2	-33.4	Peak	Horizontal
	17981.3	12.5	29.8	42.3	54.0	-11.7	Average	Horizontal
	17981.3	25.2	29.8	55.0	74.0	-19.0	Peak	Horizontal
	12262.5	28.0	21.0	49.0	74.0	-25.0	Peak	Vertical
*	14953.6	28.0	23.1	51.1	88.2	-37.1	Peak	Vertical
*	16876.3	26.6	28.0	54.6	88.2	-33.6	Peak	Vertical
	17983.0	12.3	29.9	42.2	54.0	-11.8	Average	Vertical
	17983.0	25.4	29.9	55.3	74.0	-18.7	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-15
Test Mode	802.11ax-HE160	Test Channel	207
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11778.0	29.3	19.7	49.0	74.0	-25.0	Peak	Horizontal
*	15247.7	29.0	23.2	52.2	88.2	-36.0	Peak	Horizontal
*	16910.3	26.8	28.0	54.8	88.2	-33.4	Peak	Horizontal
	17887.8	12.5	28.8	41.3	54.0	-12.7	Average	Horizontal
	17887.8	24.7	28.8	53.5	74.0	-20.5	Peak	Horizontal
	12486.9	28.6	21.5	50.1	74.0	-23.9	Peak	Vertical
*	15162.7	28.6	23.3	51.9	88.2	-36.3	Peak	Vertical
*	16390.1	29.1	26.9	56.0	88.2	-32.2	Peak	Vertical
	17877.6	12.4	29.7	42.1	54.0	-11.9	Average	Vertical
	17877.6	25.8	29.7	55.5	74.0	-18.5	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11772.9	29.6	19.7	49.3	74.0	-24.7	Peak	Horizontal
*	15155.9	29.3	23.2	52.5	88.2	-35.7	Peak	Horizontal
*	16963.0	26.1	28.2	54.3	88.2	-33.9	Peak	Horizontal
	17923.5	12.6	29.2	41.8	54.0	-12.2	Average	Horizontal
	17923.5	23.4	29.2	52.6	74.0	-21.4	Peak	Horizontal
	12529.4	28.3	21.6	49.9	74.0	-24.1	Peak	Vertical
*	14958.7	27.9	23.1	51.0	88.2	-37.2	Peak	Vertical
*	16918.8	27.1	28.1	55.2	88.2	-33.0	Peak	Vertical
	17981.3	12.6	29.8	42.4	54.0	-11.6	Average	Vertical
	17981.3	24.9	29.8	54.7	74.0	-19.3	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11438.0	29.1	19.0	48.1	74.0	-25.9	Peak	Horizontal
*	13918.3	28.2	21.9	50.1	88.2	-38.1	Peak	Horizontal
*	16827.0	26.9	28.1	55.0	88.2	-33.2	Peak	Horizontal
	17969.4	12.5	29.2	41.7	54.0	-12.3	Average	Horizontal
	17969.4	25.8	29.2	55.0	74.0	-19.0	Peak	Horizontal
	12364.5	27.9	21.3	49.2	74.0	-24.8	Peak	Vertical
*	15031.8	27.9	23.2	51.1	88.2	-37.1	Peak	Vertical
*	16968.1	26.8	28.3	55.1	88.2	-33.1	Peak	Vertical
	17877.6	12.6	29.7	42.3	54.0	-11.7	Average	Vertical
	17877.6	23.8	29.7	53.5	74.0	-20.5	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT20 (Nss = 1)	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12332.2	27.6	21.1	48.7	74.0	-25.3	Peak	Horizontal
*	14831.2	28.1	23.1	51.2	88.2	-37.0	Peak	Horizontal
*	17495.1	26.2	29.2	55.4	88.2	-32.8	Peak	Horizontal
	17979.6	12.4	29.7	42.1	54.0	-11.9	Average	Horizontal
	17979.6	25.5	29.7	55.2	74.0	-18.8	Peak	Horizontal
	12124.8	28.6	20.7	49.3	74.0	-24.7	Peak	Vertical
*	14880.5	28.2	22.9	51.1	88.2	-37.1	Peak	Vertical
*	16825.3	26.7	28.1	54.8	88.2	-33.4	Peak	Vertical
	17911.6	12.5	28.8	41.3	54.0	-12.7	Average	Vertical
	17911.6	26.2	28.8	55.0	74.0	-19.0	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT20	Test Channel	97
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12247.2	27.6	21.0	48.6	74.0	-25.4	Peak	Horizontal
*	13554.5	28.1	22.6	50.7	88.2	-37.5	Peak	Horizontal
*	17498.5	26.4	29.0	55.4	88.2	-32.8	Peak	Horizontal
	17816.4	12.4	29.4	41.8	54.0	-12.2	Average	Horizontal
	17816.4	25.3	29.4	54.7	74.0	-19.3	Peak	Horizontal
	12135.0	27.8	20.7	48.5	74.0	-25.5	Peak	Vertical
*	14936.6	27.6	23.2	50.8	88.2	-37.4	Peak	Vertical
*	16971.5	26.8	28.2	55.0	88.2	-33.2	Peak	Vertical
	17875.9	12.7	29.7	42.4	54.0	-11.6	Average	Vertical
	17875.9	25.7	29.7	55.4	74.0	-18.6	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT20	Test Channel	105
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12255.7	27.5	21.0	48.5	74.0	-25.5	Peak	Horizontal
*	14841.4	28.2	23.1	51.3	88.2	-36.9	Peak	Horizontal
*	17068.4	27.0	28.0	55.0	88.2	-33.2	Peak	Horizontal
	17874.2	12.5	29.6	42.1	54.0	-11.9	Average	Horizontal
	17874.2	25.3	29.6	54.9	74.0	-19.1	Peak	Horizontal
	12366.2	27.4	21.3	48.7	74.0	-25.3	Peak	Vertical
*	14933.2	27.5	23.2	50.7	88.2	-37.5	Peak	Vertical
*	17031.0	26.4	27.8	54.2	88.2	-34.0	Peak	Vertical
	17923.5	12.4	29.2	41.6	54.0	-12.4	Average	Vertical
	17923.5	23.4	29.2	52.6	74.0	-21.4	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT20	Test Channel	113
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12274.4	28.9	20.9	49.8	74.0	-24.2	Peak	Horizontal
*	14924.7	28.2	23.1	51.3	88.2	-36.9	Peak	Horizontal
*	17498.5	26.4	29.0	55.4	88.2	-32.8	Peak	Horizontal
	17879.3	12.7	29.6	42.3	54.0	-11.7	Average	Horizontal
	17879.3	25.9	29.6	55.5	74.0	-18.5	Peak	Horizontal
	12349.2	27.5	21.2	48.7	74.0	-25.3	Peak	Vertical
*	14746.2	28.6	22.9	51.5	88.2	-36.7	Peak	Vertical
*	17080.3	27.4	27.9	55.3	88.2	-32.9	Peak	Vertical
	17933.7	12.7	29.2	41.9	54.0	-12.1	Average	Vertical
	17933.7	25.4	29.2	54.6	74.0	-19.4	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12271.0	28.3	20.9	49.2	74.0	-24.8	Peak	Horizontal
*	14957.0	28.0	23.1	51.1	88.2	-37.1	Peak	Horizontal
*	17316.6	27.3	28.1	55.4	88.2	-32.8	Peak	Horizontal
	17874.2	12.2	29.6	41.8	54.0	-12.2	Average	Horizontal
	17874.2	25.7	29.6	55.3	74.0	-18.7	Peak	Horizontal
	12051.7	28.1	20.5	48.6	74.0	-25.4	Peak	Vertical
*	12935.7	27.8	22.7	50.5	88.2	-37.7	Peak	Vertical
*	17048.0	27.0	27.8	54.8	88.2	-33.4	Peak	Vertical
	17988.1	12.6	29.4	42.0	54.0	-12.0	Average	Vertical
	17988.1	26.1	29.4	55.5	74.0	-18.5	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT20	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12291.4	28.2	21.0	49.2	74.0	-24.8	Peak	Horizontal
*	14358.6	28.6	22.6	51.2	88.2	-37.0	Peak	Horizontal
*	17054.8	26.9	27.8	54.7	88.2	-33.5	Peak	Horizontal
	17984.7	12.5	29.7	42.2	54.0	-11.8	Average	Horizontal
	17984.7	25.3	29.7	55.0	74.0	-19.0	Peak	Horizontal
	12335.6	27.7	21.1	48.8	74.0	-25.2	Peak	Vertical
*	14853.3	28.5	23.1	51.6	88.2	-36.6	Peak	Vertical
*	17129.6	27.3	27.7	55.0	88.2	-33.2	Peak	Vertical
	17983.0	12.4	29.9	42.3	54.0	-11.7	Average	Vertical
	17983.0	25.5	29.9	55.4	74.0	-18.6	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12515.8	27.6	21.5	49.1	74.0	-24.9	Peak	Horizontal
*	14997.8	28.5	23.0	51.5	88.2	-36.7	Peak	Horizontal
*	17070.1	26.3	28.0	54.3	88.2	-33.9	Peak	Horizontal
	17867.4	12.3	29.4	41.7	54.0	-12.3	Average	Horizontal
	17867.4	25.4	29.4	54.8	74.0	-19.2	Peak	Horizontal
	12259.1	27.3	21.0	48.3	74.0	-25.7	Peak	Vertical
*	15264.7	28.9	23.3	52.2	88.2	-36.0	Peak	Vertical
*	16490.4	27.4	27.5	54.9	88.2	-33.3	Peak	Vertical
	17819.8	12.4	29.5	41.9	54.0	-12.1	Average	Vertical
	17819.8	25.8	29.5	55.3	74.0	-18.7	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT20	Test Channel	185
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12352.6	27.5	21.2	48.7	74.0	-25.3	Peak	Horizontal
*	14951.9	27.9	23.2	51.1	88.2	-37.1	Peak	Horizontal
*	16762.4	26.1	28.3	54.4	88.2	-33.8	Peak	Horizontal
	17979.6	12.5	29.7	42.2	54.0	-11.8	Average	Horizontal
	17979.6	25.1	29.7	54.8	74.0	-19.2	Peak	Horizontal
	12476.7	27.5	21.4	48.9	74.0	-25.1	Peak	Vertical
*	14764.9	28.4	22.8	51.2	88.2	-37.0	Peak	Vertical
*	16961.3	26.4	28.2	54.6	88.2	-33.6	Peak	Vertical
	17882.7	12.3	29.2	41.5	54.0	-12.5	Average	Vertical
	17882.7	25.8	29.2	55.0	74.0	-19.0	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT20	Test Channel	189
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12184.3	28.4	20.8	49.2	74.0	-24.8	Peak	Horizontal
*	15152.5	28.4	23.2	51.6	88.2	-36.6	Peak	Horizontal
*	16859.3	26.7	28.3	55.0	88.2	-33.2	Peak	Horizontal
	17909.9	12.6	28.7	41.3	54.0	-12.7	Average	Horizontal
	17909.9	26.4	28.7	55.1	74.0	-18.9	Peak	Horizontal
	12342.4	27.9	21.1	49.0	74.0	-25.0	Peak	Vertical
*	14987.6	27.9	23.0	50.9	88.2	-37.3	Peak	Vertical
*	17337.0	27.0	28.3	55.3	88.2	-32.9	Peak	Vertical
	17879.3	12.4	29.6	42.0	54.0	-12.0	Average	Vertical
	17879.3	25.8	29.6	55.4	74.0	-18.6	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT20	Test Channel	209
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12503.9	28.1	21.5	49.6	74.0	-24.4	Peak	Horizontal
*	15121.9	28.0	23.1	51.1	88.2	-37.1	Peak	Horizontal
*	16721.6	26.7	28.1	54.8	88.2	-33.4	Peak	Horizontal
	17821.5	12.5	29.5	42.0	54.0	-12.0	Average	Horizontal
	17821.5	25.5	29.5	55.0	74.0	-19.0	Peak	Horizontal
	12170.7	28.2	20.7	48.9	74.0	-25.1	Peak	Vertical
*	15137.2	28.4	23.2	51.6	88.2	-36.6	Peak	Vertical
*	16956.2	27.0	28.1	55.1	88.2	-33.1	Peak	Vertical
	17986.4	12.4	29.6	42.0	54.0	-12.0	Average	Vertical
	17986.4	26.3	29.6	55.9	74.0	-18.1	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT20	Test Channel	229
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12689.2	27.0	22.2	49.2	74.0	-24.8	Peak	Horizontal
*	14749.6	28.0	22.9	50.9	88.2	-37.3	Peak	Horizontal
*	16915.4	26.4	28.1	54.5	88.2	-33.7	Peak	Horizontal
	17920.1	12.2	29.1	41.3	54.0	-12.7	Average	Horizontal
	17920.1	26.2	29.1	55.3	74.0	-18.7	Peak	Horizontal
	11781.4	29.1	19.8	48.9	74.0	-25.1	Peak	Vertical
*	14933.2	27.4	23.2	50.6	88.2	-37.6	Peak	Vertical
*	16934.1	26.8	27.8	54.6	88.2	-33.6	Peak	Vertical
	17969.4	12.9	29.2	42.1	54.0	-11.9	Average	Vertical
	17969.4	26.2	29.2	55.4	74.0	-18.6	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11793.3	28.8	19.8	48.6	74.0	-25.4	Peak	Horizontal
*	14815.9	28.7	23.2	51.9	88.2	-36.3	Peak	Horizontal
*	16818.5	26.7	28.1	54.8	88.2	-33.4	Peak	Horizontal
	17911.6	12.8	28.8	41.6	54.0	-12.4	Average	Horizontal
	17911.6	26.6	28.8	55.4	74.0	-18.6	Peak	Horizontal
	12063.6	28.4	20.6	49.0	74.0	-25.0	Peak	Vertical
*	14788.7	28.7	23.1	51.8	88.2	-36.4	Peak	Vertical
*	17491.7	26.1	29.3	55.4	88.2	-32.8	Peak	Vertical
	17875.9	12.5	29.7	42.2	54.0	-11.8	Average	Vertical
	17875.9	26.6	29.7	56.3	74.0	-17.7	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12174.1	28.0	20.7	48.7	74.0	-25.3	Peak	Horizontal
*	14943.4	27.0	23.2	50.2	88.2	-38.0	Peak	Horizontal
*	16983.4	26.9	27.9	54.8	88.2	-33.4	Peak	Horizontal
	17981.3	12.4	29.8	42.2	54.0	-11.8	Average	Horizontal
	17981.3	24.7	29.8	54.5	74.0	-19.5	Peak	Horizontal
	12226.8	27.5	20.8	48.3	74.0	-25.7	Peak	Vertical
*	14827.8	27.6	23.2	50.8	88.2	-37.4	Peak	Vertical
*	17080.3	26.5	27.9	54.4	88.2	-33.8	Peak	Vertical
	17981.3	12.6	29.8	42.4	54.0	-11.6	Average	Vertical
	17981.3	25.1	29.8	54.9	74.0	-19.1	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12162.2	28.2	20.8	49.0	74.0	-25.0	Peak	Horizontal
*	15266.4	28.3	23.3	51.6	88.2	-36.6	Peak	Horizontal
*	16872.9	26.5	28.1	54.6	88.2	-33.6	Peak	Horizontal
	17874.2	12.9	29.6	42.5	54.0	-11.5	Average	Horizontal
	17874.2	25.2	29.6	54.8	74.0	-19.2	Peak	Horizontal
	12497.1	27.6	21.5	49.1	74.0	-24.9	Peak	Vertical
*	15237.5	28.4	23.2	51.6	88.2	-36.6	Peak	Vertical
*	17008.9	26.8	27.8	54.6	88.2	-33.6	Peak	Vertical
	17882.7	12.7	29.2	41.9	54.0	-12.1	Average	Vertical
	17882.7	25.7	29.2	54.9	74.0	-19.1	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT40	Test Channel	99
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12260.8	27.8	21.0	48.8	74.0	-25.2	Peak	Horizontal
*	14943.4	28.4	23.2	51.6	88.2	-36.6	Peak	Horizontal
*	16867.8	26.3	28.2	54.5	88.2	-33.7	Peak	Horizontal
	17916.7	12.7	28.9	41.6	54.0	-12.4	Average	Horizontal
	17916.7	26.0	28.9	54.9	74.0	-19.1	Peak	Horizontal
	12180.9	27.4	20.8	48.2	74.0	-25.8	Peak	Vertical
*	14676.5	27.9	23.0	50.9	88.2	-37.3	Peak	Vertical
*	17440.7	26.3	29.0	55.3	88.2	-32.9	Peak	Vertical
	17826.6	12.9	29.5	42.4	54.0	-11.6	Average	Vertical
	17826.6	26.3	29.5	55.8	74.0	-18.2	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT40	Test Channel	107
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12260.8	27.8	21.0	48.8	74.0	-25.2	Peak	Horizontal
*	14362.0	28.5	22.7	51.2	88.2	-37.0	Peak	Horizontal
*	16740.3	26.5	27.9	54.4	88.2	-33.8	Peak	Horizontal
	17877.6	12.8	29.7	42.5	54.0	-11.5	Average	Horizontal
	17877.6	24.4	29.7	54.1	74.0	-19.9	Peak	Horizontal
	12186.0	28.1	20.8	48.9	74.0	-25.1	Peak	Vertical
*	15133.8	27.7	23.2	50.9	88.2	-37.3	Peak	Vertical
*	16862.7	26.5	28.4	54.9	88.2	-33.3	Peak	Vertical
	17874.2	12.9	29.6	42.5	54.0	-11.5	Average	Vertical
	17874.2	26.3	29.6	55.9	74.0	-18.1	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT40	Test Channel	115
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11881.7	29.0	20.0	49.0	74.0	-25.0	Peak	Horizontal
*	14805.7	27.6	23.2	50.8	88.2	-37.4	Peak	Horizontal
*	16881.4	26.3	27.9	54.2	88.2	-34.0	Peak	Horizontal
	17869.1	12.7	29.4	42.1	54.0	-11.9	Average	Horizontal
	17869.1	25.7	29.4	55.1	74.0	-18.9	Peak	Horizontal
	12140.1	27.9	20.8	48.7	74.0	-25.3	Peak	Vertical
*	15249.4	28.7	23.2	51.9	88.2	-36.3	Peak	Vertical
*	16884.8	26.1	27.8	53.9	88.2	-34.3	Peak	Vertical
	17879.3	12.5	29.6	42.1	54.0	-11.9	Average	Vertical
	17879.3	26.3	29.6	55.9	74.0	-18.1	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12444.4	27.2	21.2	48.4	74.0	-25.6	Peak	Horizontal
*	15038.6	28.0	23.1	51.1	88.2	-37.1	Peak	Horizontal
*	16898.4	26.7	27.6	54.3	88.2	-33.9	Peak	Horizontal
	17984.7	12.5	29.7	42.2	54.0	-11.8	Average	Horizontal
	17984.7	25.6	29.7	55.3	74.0	-18.7	Peak	Horizontal
	12174.1	28.4	20.7	49.1	74.0	-24.9	Peak	Vertical
*	15130.4	27.1	23.2	50.3	88.2	-37.9	Peak	Vertical
*	16939.2	27.2	27.8	55.0	88.2	-33.2	Peak	Vertical
	17857.2	12.7	29.0	41.7	54.0	-12.3	Average	Vertical
	17857.2	23.5	29.0	52.5	74.0	-21.5	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12337.3	27.4	21.1	48.5	74.0	-25.5	Peak	Horizontal
*	15159.3	28.4	23.2	51.6	88.2	-36.6	Peak	Horizontal
*	17495.1	26.2	29.2	55.4	88.2	-32.8	Peak	Horizontal
	17881.0	12.8	29.4	42.2	54.0	-11.8	Average	Horizontal
	17881.0	25.4	29.4	54.8	74.0	-19.2	Peak	Horizontal
	12517.5	27.6	21.5	49.1	74.0	-24.9	Peak	Vertical
*	14644.2	28.3	22.9	51.2	88.2	-37.0	Peak	Vertical
*	16917.1	26.3	28.1	54.4	88.2	-33.8	Peak	Vertical
	17977.9	12.8	29.6	42.4	54.0	-11.6	Average	Vertical
	17977.9	26.1	29.6	55.7	74.0	-18.3	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12500.5	27.3	21.5	48.8	74.0	-25.2	Peak	Horizontal
*	14923.0	27.7	23.1	50.8	88.2	-37.4	Peak	Horizontal
*	17437.3	26.5	28.9	55.4	88.2	-32.8	Peak	Horizontal
	17903.1	12.6	28.4	41.0	54.0	-13.0	Average	Horizontal
	17903.1	24.1	28.4	52.5	74.0	-21.5	Peak	Horizontal
	12452.9	27.5	21.2	48.7	74.0	-25.3	Peak	Vertical
*	15144.0	28.2	23.2	51.4	88.2	-36.8	Peak	Vertical
*	17141.5	27.1	27.5	54.6	88.2	-33.6	Peak	Vertical
	17903.1	12.5	28.4	40.9	54.0	-13.1	Average	Vertical
	17903.1	23.3	28.4	51.7	74.0	-22.3	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT40	Test Channel	187
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12347.5	28.1	21.2	49.3	74.0	-24.7	Peak	Horizontal
*	12894.9	28.9	22.6	51.5	88.2	-36.7	Peak	Horizontal
*	16980.0	26.7	28.0	54.7	88.2	-33.5	Peak	Horizontal
	17865.7	12.7	29.3	42.0	54.0	-12.0	Average	Horizontal
	17865.7	25.7	29.3	55.0	74.0	-19.0	Peak	Horizontal
	12510.7	27.3	21.5	48.8	74.0	-25.2	Peak	Vertical
*	15026.7	28.2	23.2	51.4	88.2	-36.8	Peak	Vertical
*	16963.0	26.1	28.2	54.3	88.2	-33.9	Peak	Vertical
	17855.5	12.6	28.9	41.5	54.0	-12.5	Average	Vertical
	17855.5	25.4	28.9	54.3	74.0	-19.7	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT40	Test Channel	195
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12322.0	28.6	21.0	49.6	74.0	-24.4	Peak	Horizontal
*	15147.4	27.8	23.2	51.0	88.2	-37.2	Peak	Horizontal
*	16813.4	26.1	28.2	54.3	88.2	-33.9	Peak	Horizontal
	17981.3	12.5	29.8	42.3	54.0	-11.7	Average	Horizontal
	17981.3	25.0	29.8	54.8	74.0	-19.2	Peak	Horizontal
	12675.6	28.0	22.1	50.1	74.0	-23.9	Peak	Vertical
*	14972.3	27.6	22.9	50.5	88.2	-37.7	Peak	Vertical
*	17070.1	27.3	28.0	55.3	88.2	-32.9	Peak	Vertical
	17845.3	12.6	28.3	40.9	54.0	-13.1	Average	Vertical
	17845.3	26.7	28.3	55.0	74.0	-19.0	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT40	Test Channel	211
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12282.9	27.7	20.9	48.6	74.0	-25.4	Peak	Horizontal
*	14933.2	27.2	23.2	50.4	88.2	-37.8	Peak	Horizontal
*	16954.5	26.2	28.0	54.2	88.2	-34.0	Peak	Horizontal
	17983.0	12.5	29.9	42.4	54.0	-11.6	Average	Horizontal
	17983.0	24.7	29.9	54.6	74.0	-19.4	Peak	Horizontal
	11902.1	28.1	20.1	48.2	74.0	-25.8	Peak	Vertical
*	14955.3	28.0	23.1	51.1	88.2	-37.1	Peak	Vertical
*	16971.5	26.2	28.2	54.4	88.2	-33.8	Peak	Vertical
	17969.4	12.9	29.2	42.1	54.0	-11.9	Average	Vertical
	17969.4	25.6	29.2	54.8	74.0	-19.2	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT40	Test Channel	227
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12242.1	27.8	21.0	48.8	74.0	-25.2	Peak	Horizontal
*	14938.3	27.5	23.2	50.7	88.2	-37.5	Peak	Horizontal
*	17029.3	26.8	27.8	54.6	88.2	-33.6	Peak	Horizontal
	17875.9	12.8	29.7	42.5	54.0	-11.5	Average	Horizontal
	17875.9	25.5	29.7	55.2	74.0	-18.8	Peak	Horizontal
	12279.5	27.8	20.9	48.7	74.0	-25.3	Peak	Vertical
*	14929.8	27.6	23.1	50.7	88.2	-37.5	Peak	Vertical
*	16889.9	27.5	27.7	55.2	88.2	-33.0	Peak	Vertical
	17874.2	12.4	29.6	42.0	54.0	-12.0	Average	Vertical
	17874.2	25.1	29.6	54.7	74.0	-19.3	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12371.3	27.7	21.3	49.0	74.0	-25.0	Peak	Horizontal
*	14778.5	28.1	22.9	51.0	88.2	-37.2	Peak	Horizontal
*	16752.2	26.5	28.3	54.8	88.2	-33.4	Peak	Horizontal
	17877.6	12.9	29.7	42.6	54.0	-11.4	Average	Horizontal
	17877.6	24.9	29.7	54.6	74.0	-19.4	Peak	Horizontal
	12412.1	27.9	21.2	49.1	74.0	-24.9	Peak	Vertical
*	14984.2	27.8	23.0	50.8	88.2	-37.4	Peak	Vertical
*	17420.3	26.8	28.3	55.1	88.2	-33.1	Peak	Vertical
	17831.7	12.7	29.1	41.8	54.0	-12.2	Average	Vertical
	17831.7	25.6	29.1	54.7	74.0	-19.3	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11864.7	28.3	19.9	48.2	74.0	-25.8	Peak	Horizontal
*	14758.1	28.3	22.9	51.2	88.2	-37.0	Peak	Horizontal
*	17090.5	27.2	27.7	54.9	88.2	-33.3	Peak	Horizontal
	17865.7	12.4	29.3	41.7	54.0	-12.3	Average	Horizontal
	17865.7	26.0	29.3	55.3	74.0	-18.7	Peak	Horizontal
	12150.3	28.6	20.8	49.4	74.0	-24.6	Peak	Vertical
*	14895.8	27.5	23.1	50.6	88.2	-37.6	Peak	Vertical
*	16804.9	26.9	28.1	55.0	88.2	-33.2	Peak	Vertical
	17823.2	12.5	29.6	42.1	54.0	-11.9	Average	Vertical
	17823.2	25.0	29.6	54.6	74.0	-19.4	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12310.1	28.5	21.0	49.5	74.0	-24.5	Peak	Horizontal
*	15127.0	28.0	23.2	51.2	88.2	-37.0	Peak	Horizontal
*	16527.8	27.8	27.4	55.2	88.2	-33.0	Peak	Horizontal
	17877.6	12.5	29.7	42.2	54.0	-11.8	Average	Horizontal
	17877.6	25.6	29.7	55.3	74.0	-18.7	Peak	Horizontal
	12284.6	28.5	21.0	49.5	74.0	-24.5	Peak	Vertical
*	14790.4	28.4	23.1	51.5	88.2	-36.7	Peak	Vertical
*	16988.5	26.8	27.8	54.6	88.2	-33.6	Peak	Vertical
	17903.1	13.0	28.4	41.4	54.0	-12.6	Average	Vertical
	17903.1	23.1	28.4	51.5	74.0	-22.5	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT80	Test Channel	103
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12206.4	27.6	20.8	48.4	74.0	-25.6	Peak	Horizontal
*	14674.8	27.9	23.0	50.9	88.2	-37.3	Peak	Horizontal
*	16811.7	26.3	28.2	54.5	88.2	-33.7	Peak	Horizontal
	17877.6	12.6	29.7	42.3	54.0	-11.7	Average	Horizontal
	17877.6	25.2	29.7	54.9	74.0	-19.1	Peak	Horizontal
	12228.5	27.9	20.8	48.7	74.0	-25.3	Peak	Vertical
*	14829.5	27.9	23.1	51.0	88.2	-37.2	Peak	Vertical
*	17535.9	26.4	28.8	55.2	88.2	-33.0	Peak	Vertical
	17903.1	12.7	28.4	41.1	54.0	-12.9	Average	Vertical
	17903.1	23.8	28.4	52.2	74.0	-21.8	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT80	Test Channel	119
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12255.7	27.9	21.0	48.9	74.0	-25.1	Peak	Horizontal
*	14822.7	27.8	23.2	51.0	88.2	-37.2	Peak	Horizontal
*	16991.9	27.1	27.8	54.9	88.2	-33.3	Peak	Horizontal
	17879.3	12.5	29.6	42.1	54.0	-11.9	Average	Horizontal
	17879.3	25.2	29.6	54.8	74.0	-19.2	Peak	Horizontal
	12498.8	27.8	21.5	49.3	74.0	-24.7	Peak	Vertical
*	14766.6	27.6	22.8	50.4	88.2	-37.8	Peak	Vertical
*	17488.3	26.4	29.1	55.5	88.2	-32.7	Peak	Vertical
	17881.0	12.6	29.4	42.0	54.0	-12.0	Average	Vertical
	17881.0	25.4	29.4	54.8	74.0	-19.2	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12225.1	27.8	20.8	48.6	74.0	-25.4	Peak	Horizontal
*	14812.5	28.1	23.2	51.3	88.2	-36.9	Peak	Horizontal
*	16997.0	26.6	27.8	54.4	88.2	-33.8	Peak	Horizontal
	17870.8	12.8	29.5	42.3	54.0	-11.7	Average	Horizontal
	17870.8	25.8	29.5	55.3	74.0	-18.7	Peak	Horizontal
	12148.6	28.5	20.8	49.3	74.0	-24.7	Peak	Vertical
*	14977.4	28.3	22.9	51.2	88.2	-37.0	Peak	Vertical
*	16956.2	25.9	28.1	54.0	88.2	-34.2	Peak	Vertical
	17996.6	13.0	28.7	41.7	54.0	-12.3	Average	Vertical
	17996.6	25.9	28.7	54.6	74.0	-19.4	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12344.1	27.9	21.1	49.0	74.0	-25.0	Peak	Horizontal
*	14134.2	28.6	21.9	50.5	88.2	-37.7	Peak	Horizontal
*	16961.3	26.9	28.2	55.1	88.2	-33.1	Peak	Horizontal
	17983.0	12.7	29.9	42.6	54.0	-11.4	Average	Horizontal
	17983.0	24.9	29.9	54.8	74.0	-19.2	Peak	Horizontal
	12279.5	27.8	20.9	48.7	74.0	-25.3	Peak	Vertical
*	14861.8	27.9	23.0	50.9	88.2	-37.3	Peak	Vertical
*	16855.9	26.2	28.3	54.5	88.2	-33.7	Peak	Vertical
	17821.5	13.0	29.5	42.5	54.0	-11.5	Average	Vertical
	17821.5	25.5	29.5	55.0	74.0	-19.0	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12435.9	27.2	21.3	48.5	74.0	-25.5	Peak	Horizontal
*	14810.8	27.5	23.2	50.7	88.2	-37.5	Peak	Horizontal
*	16827.0	26.8	28.1	54.9	88.2	-33.3	Peak	Horizontal
	17813.0	12.9	29.3	42.2	54.0	-11.8	Average	Horizontal
	17813.0	25.1	29.3	54.4	74.0	-19.6	Peak	Horizontal
	12532.8	27.3	21.6	48.9	74.0	-25.1	Peak	Vertical
*	14853.3	28.1	23.1	51.2	88.2	-37.0	Peak	Vertical
*	17076.9	25.8	28.0	53.8	88.2	-34.4	Peak	Vertical
	17884.4	12.9	29.1	42.0	54.0	-12.0	Average	Vertical
	17884.4	25.7	29.1	54.8	74.0	-19.2	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT80	Test Channel	183
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10805.6	30.6	18.1	48.7	74.0	-25.3	Peak	Horizontal
*	14890.7	27.5	23.0	50.5	88.2	-37.7	Peak	Horizontal
*	16923.9	26.4	28.0	54.4	88.2	-33.8	Peak	Horizontal
	17972.8	13.0	29.4	42.4	54.0	-11.6	Average	Horizontal
	17972.8	25.8	29.4	55.2	74.0	-18.8	Peak	Horizontal
	11703.2	29.0	19.5	48.5	74.0	-25.5	Peak	Vertical
*	15145.7	27.7	23.2	50.9	88.2	-37.3	Peak	Vertical
*	17049.7	27.9	27.8	55.7	88.2	-32.5	Peak	Vertical
	17814.7	12.9	29.4	42.3	54.0	-11.7	Average	Vertical
	17814.7	25.3	29.4	54.7	74.0	-19.3	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT80	Test Channel	199
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11801.8	28.6	19.8	48.4	74.0	-25.6	Peak	Horizontal
*	13916.6	28.5	21.9	50.4	88.2	-37.8	Peak	Horizontal
*	16980.0	26.7	28.0	54.7	88.2	-33.5	Peak	Horizontal
	17875.9	12.6	29.7	42.3	54.0	-11.7	Average	Horizontal
	17875.9	24.5	29.7	54.2	74.0	-19.8	Peak	Horizontal
	12160.5	27.4	20.8	48.2	74.0	-25.8	Peak	Vertical
*	15036.9	27.9	23.1	51.0	88.2	-37.2	Peak	Vertical
*	16930.7	27.3	27.8	55.1	88.2	-33.1	Peak	Vertical
	17986.4	12.5	29.6	42.1	54.0	-11.9	Average	Vertical
	17986.4	25.4	29.6	55.0	74.0	-19.0	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT80	Test Channel	215
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11805.2	28.6	19.8	48.4	74.0	-25.6	Peak	Horizontal
*	14669.7	27.7	22.9	50.6	88.2	-37.6	Peak	Horizontal
*	17076.9	26.6	28.0	54.6	88.2	-33.6	Peak	Horizontal
	17857.2	12.6	29.0	41.6	54.0	-12.4	Average	Horizontal
	17857.2	23.5	29.0	52.5	74.0	-21.5	Peak	Horizontal
	12150.3	27.3	20.8	48.1	74.0	-25.9	Peak	Vertical
*	14912.8	27.4	23.1	50.5	88.2	-37.7	Peak	Vertical
*	16816.8	26.0	28.1	54.1	88.2	-34.1	Peak	Vertical
	17864.0	12.9	29.3	42.2	54.0	-11.8	Average	Vertical
	17864.0	26.4	29.3	55.7	74.0	-18.3	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12189.4	27.4	20.8	48.2	74.0	-25.8	Peak	Horizontal
*	14834.6	27.0	23.1	50.1	88.2	-38.1	Peak	Horizontal
*	17075.2	26.4	28.0	54.4	88.2	-33.8	Peak	Horizontal
	17950.7	13.0	28.4	41.4	54.0	-12.6	Average	Horizontal
	17950.7	24.2	28.4	52.6	74.0	-21.4	Peak	Horizontal
	10848.1	30.0	18.1	48.1	74.0	-25.9	Peak	Vertical
*	15155.9	27.7	23.2	50.9	88.2	-37.3	Peak	Vertical
*	16798.1	26.8	27.9	54.7	88.2	-33.5	Peak	Vertical
	17881.0	12.8	29.4	42.2	54.0	-11.8	Average	Vertical
	17881.0	25.4	29.4	54.8	74.0	-19.2	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12138.4	28.1	20.8	48.9	74.0	-25.1	Peak	Horizontal
*	15154.2	27.9	23.2	51.1	88.2	-37.1	Peak	Horizontal
*	16973.2	26.7	28.1	54.8	88.2	-33.4	Peak	Horizontal
	17903.1	12.6	28.4	41.0	54.0	-13.0	Average	Horizontal
	17903.1	24.1	28.4	52.5	74.0	-21.5	Peak	Horizontal
	12177.5	28.1	20.7	48.8	74.0	-25.2	Peak	Vertical
*	15127.0	27.4	23.2	50.6	88.2	-37.6	Peak	Vertical
*	16803.2	26.0	28.0	54.0	88.2	-34.2	Peak	Vertical
	17928.6	12.9	29.4	42.3	54.0	-11.7	Average	Vertical
	17928.6	25.2	29.4	54.6	74.0	-19.4	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	7930.9	33.8	14.1	47.9	88.2	-40.3	Peak	Horizontal
	11679.4	28.5	19.5	48.0	74.0	-26.0	Peak	Horizontal
*	17109.2	26.6	27.7	54.3	88.2	-33.9	Peak	Horizontal
	17879.3	12.7	29.6	42.3	54.0	-11.7	Average	Horizontal
	17879.3	25.3	29.6	54.9	74.0	-19.1	Peak	Horizontal
*	7930.9	33.7	14.1	47.8	88.2	-40.4	Peak	Vertical
	11890.2	28.3	20.1	48.4	74.0	-25.6	Peak	Vertical
*	17075.2	26.8	28.0	54.8	88.2	-33.4	Peak	Vertical
	17921.8	12.4	29.1	41.5	54.0	-12.5	Average	Vertical
	17921.8	25.4	29.1	54.5	74.0	-19.5	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT160	Test Channel	111
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12561.7	26.8	21.6	48.4	74.0	-25.6	Peak	Horizontal
*	15130.4	27.6	23.2	50.8	88.2	-37.4	Peak	Horizontal
*	16820.2	25.9	28.1	54.0	88.2	-34.2	Peak	Horizontal
	17872.5	13.0	29.6	42.6	54.0	-11.4	Average	Horizontal
	17872.5	25.3	29.6	54.9	74.0	-19.1	Peak	Horizontal
	12282.9	28.1	20.9	49.0	74.0	-25.0	Peak	Vertical
*	14843.1	28.1	23.1	51.2	88.2	-37.0	Peak	Vertical
*	17133.0	26.7	27.7	54.4	88.2	-33.8	Peak	Vertical
	17903.1	12.8	28.4	41.2	54.0	-12.8	Average	Vertical
	17903.1	23.5	28.4	51.9	74.0	-22.1	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12152.0	28.5	20.8	49.3	74.0	-24.7	Peak	Horizontal
*	14851.6	27.3	23.1	50.4	88.2	-37.8	Peak	Horizontal
*	17552.9	26.0	29.0	55.0	88.2	-33.2	Peak	Horizontal
	17967.7	12.7	29.1	41.8	54.0	-12.2	Average	Horizontal
	17967.7	25.5	29.1	54.6	74.0	-19.4	Peak	Horizontal
	12291.4	27.2	21.0	48.2	74.0	-25.8	Peak	Vertical
*	14882.2	28.6	22.9	51.5	88.2	-36.7	Peak	Vertical
*	17501.9	26.3	28.8	55.1	88.2	-33.1	Peak	Vertical
	17857.2	12.8	29.0	41.8	54.0	-12.2	Average	Vertical
	17857.2	24.9	29.0	53.9	74.0	-20.1	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT160	Test Channel	175
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12282.9	27.6	20.9	48.5	74.0	-25.5	Peak	Horizontal
*	15040.3	28.0	23.1	51.1	88.2	-37.1	Peak	Horizontal
*	16869.5	25.7	28.2	53.9	88.2	-34.3	Peak	Horizontal
	17882.7	12.3	29.2	41.5	54.0	-12.5	Average	Horizontal
	17882.7	25.5	29.2	54.7	74.0	-19.3	Peak	Horizontal
	12024.5	27.9	20.5	48.4	74.0	-25.6	Peak	Vertical
*	15157.6	27.9	23.2	51.1	88.2	-37.1	Peak	Vertical
*	16959.6	26.6	28.1	54.7	88.2	-33.5	Peak	Vertical
	17903.1	12.7	28.4	41.1	54.0	-12.9	Average	Vertical
	17903.1	23.2	28.4	51.6	74.0	-22.4	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WJ-AC1	Test Date	2025-02-17
Test Mode	802.11be-EHT160	Test Channel	207
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12201.3	28.7	20.8	49.5	74.0	-24.5	Peak	Horizontal
*	14792.1	28.1	23.2	51.3	88.2	-36.9	Peak	Horizontal
*	17491.7	25.9	29.3	55.2	88.2	-33.0	Peak	Horizontal
	17845.3	12.9	28.3	41.2	54.0	-12.8	Average	Horizontal
	17845.3	24.5	28.3	52.8	74.0	-21.2	Peak	Horizontal
	12184.3	27.8	20.8	48.6	74.0	-25.4	Peak	Vertical
*	14754.7	28.6	22.9	51.5	88.2	-36.7	Peak	Vertical
*	16988.5	26.6	27.8	54.4	88.2	-33.8	Peak	Vertical
	17821.5	12.7	29.5	42.2	54.0	-11.8	Average	Vertical
	17821.5	25.2	29.5	54.7	74.0	-19.3	Peak	Vertical


Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 30MHz:

Site	WJ-AC1	Test Date	2025-02-18
Temperature	17.2 °C	Humidity	31.9 %
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Carl Jiang
Factor	FMZB 1519-60 D_07076_00031	Polarity	Coaxial
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

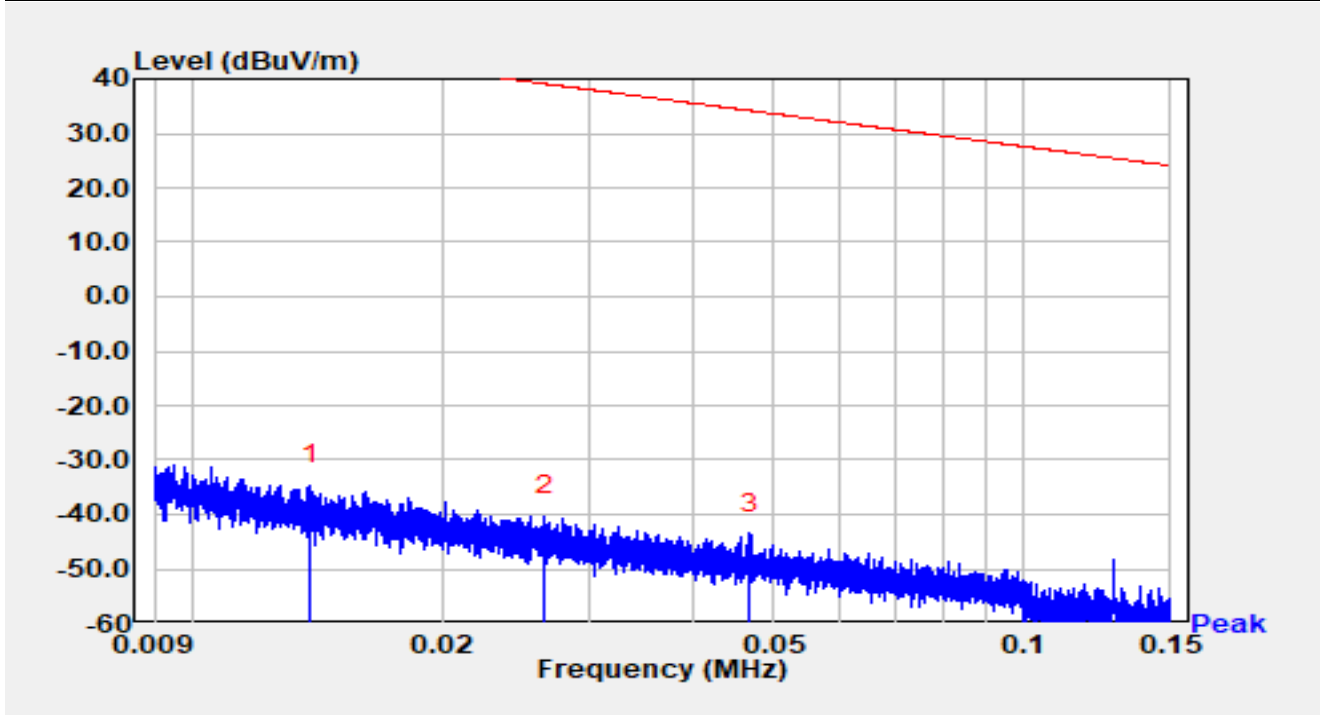


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.014	24.84	-59.53	-34.69	-79.45	44.76	Peak
2		0.027	19.69	-60.03	-40.35	-79.47	39.12	Peak
3	*	0.047	16.75	-60.18	-43.43	-77.64	34.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3m, d2 = 300m (9kHz-490kHz) or 30m (490kHz-30MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site	WJ-AC1	Test Date	2025-02-18
Temperature	17.2 °C	Humidity	31.9 %
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Carl Jiang
Factor	FMZB 1519-60 D_07076_00031	Polarity	Coaxial
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

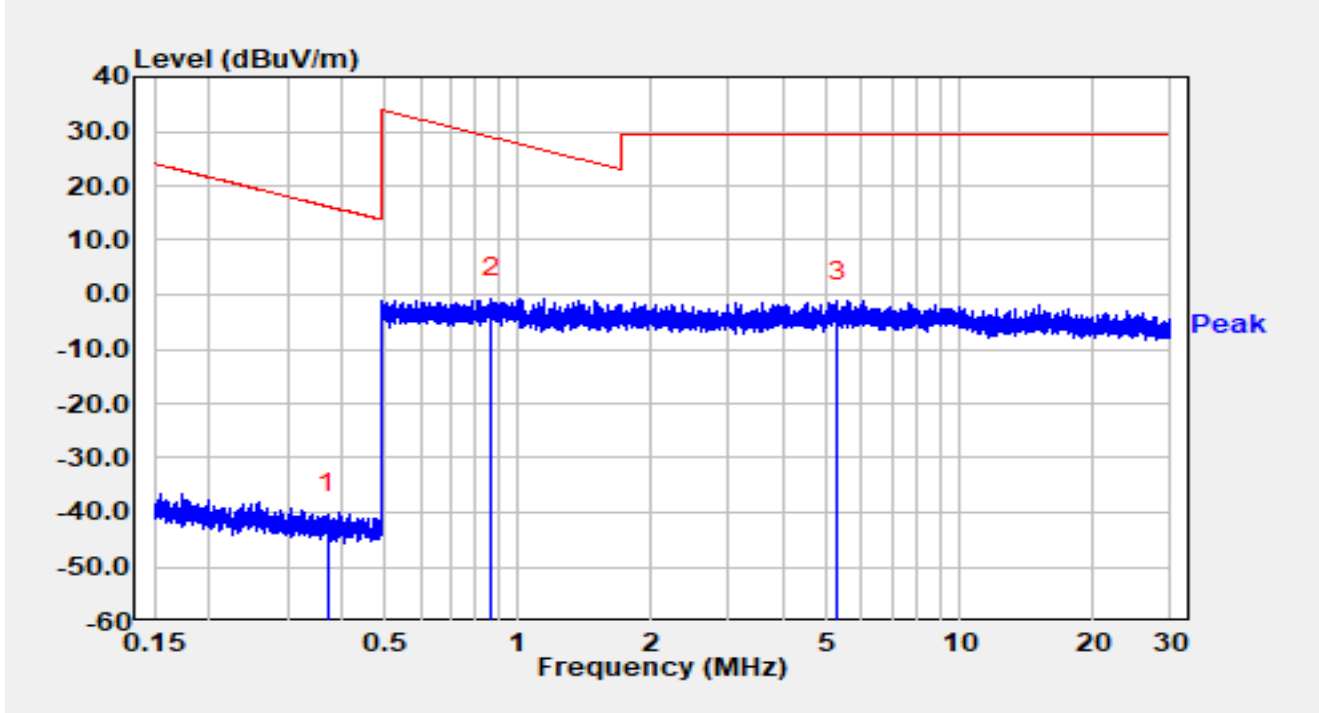


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.371	20.01	-60.33	-40.31	-56.54	16.23	Peak
2	*	0.869	19.64	-20.36	-0.72	-29.55	28.84	Peak
3		5.271	19.28	-20.42	-1.14	-30.64	29.50	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3m, d2 = 300m (9kHz-490kHz) or 30m (490kHz-30MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site	WJ-AC1	Test Date	2025-02-18
Temperature	17.2 °C	Humidity	31.9 %
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Carl Jiang
Factor	FMZB 1519-60 D_07076_00031	Polarity	Coplanar
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

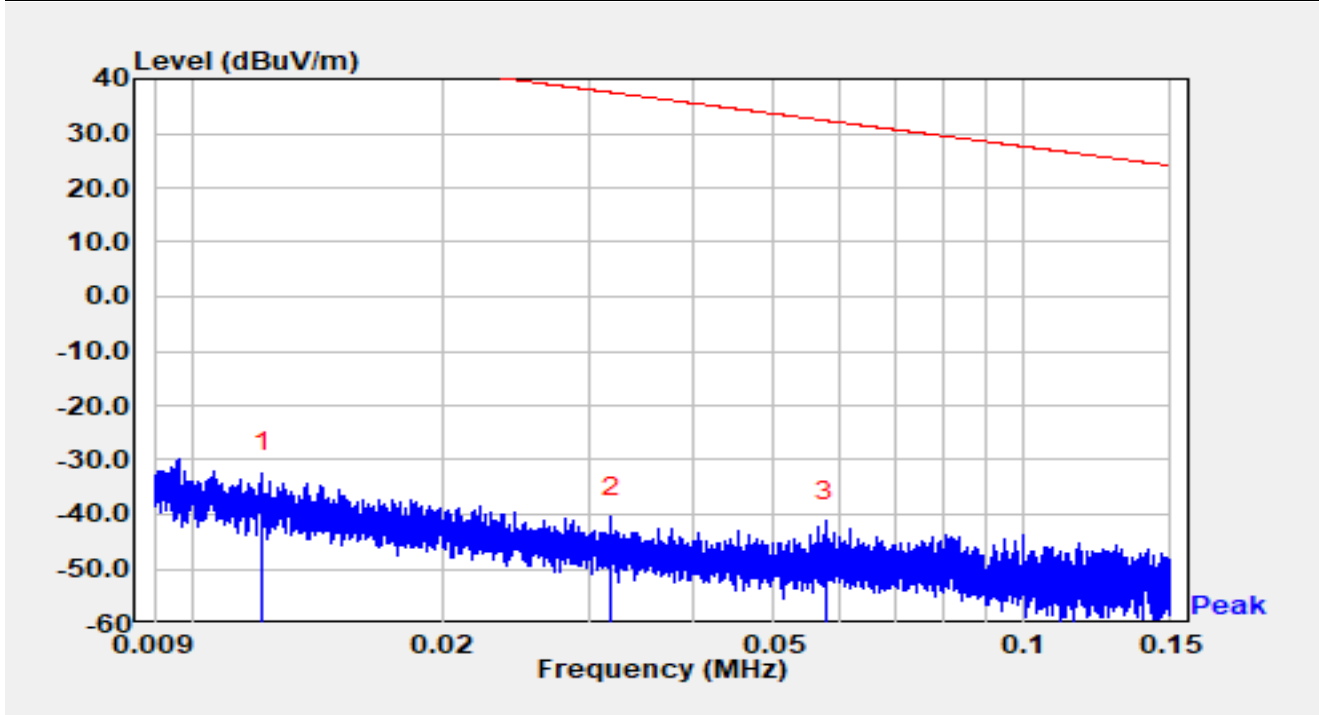


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.012	27.01	-59.41	-32.40	-78.31	45.91	Peak
2		0.032	19.66	-60.10	-40.44	-77.96	37.52	Peak
3	*	0.058	18.88	-60.19	-41.31	-73.69	32.38	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + $40\log(d1/d2)$ (dB), $d1 = 3m$, $d2 = 300m$ (9kHz-490kHz) or 30m (490kHz-30MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site	WJ-AC1	Test Date	2025-02-18
Temperature	17.2 °C	Humidity	31.9 %
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Carl Jiang
Factor	FMZB 1519-60 D_07076_00031	Polarity	Coplanar
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

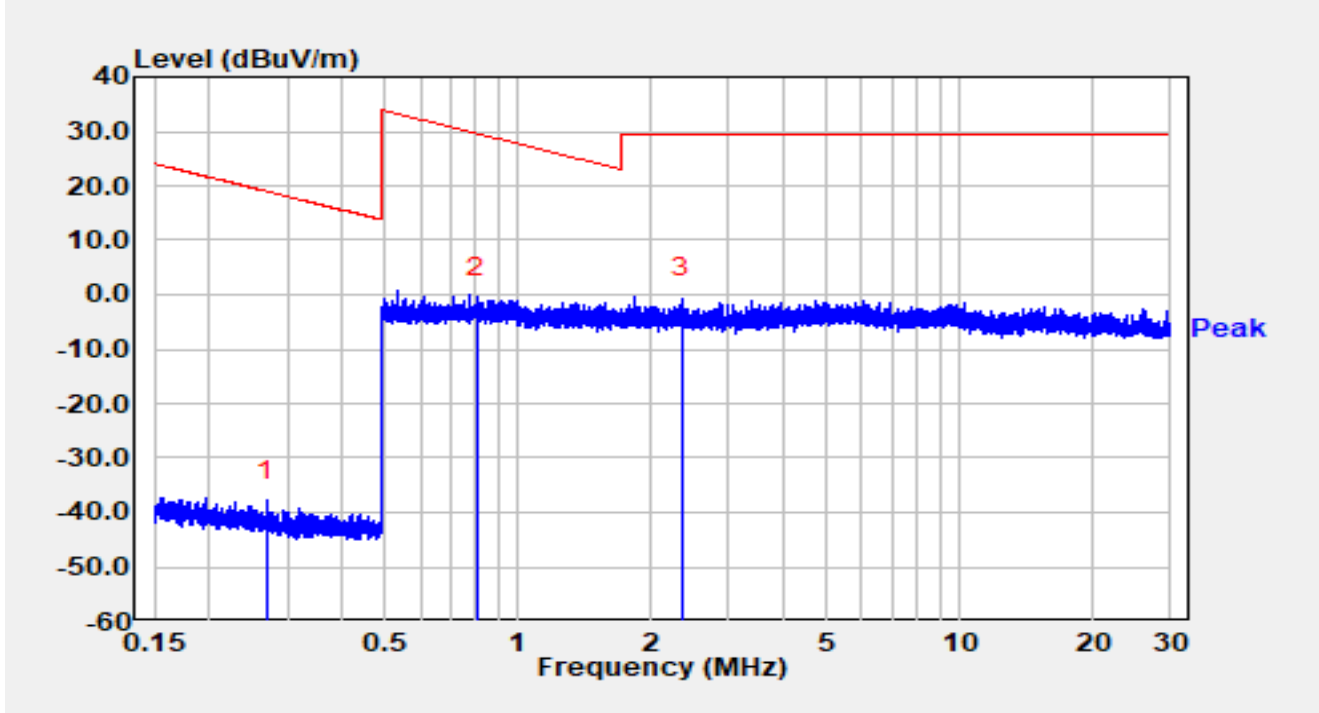


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.270	22.45	-60.30	-37.85	-56.83	18.98	Peak
2	*	0.807	19.84	-20.36	-0.52	-30.00	29.48	Peak
3		2.351	19.52	-20.22	-0.71	-30.21	29.50	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3m, d2 = 300m (9kHz-490kHz) or 30m (490kHz-30MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

The Result of Radiated Emission below 1GHz:

Site	WJ-AC1	Test Date	2025-02-18
Temperature	17.2 °C	Humidity	31.9 %
Limit	FCC_Part 15.209_RSE (3m)_QP	Test Engineer	Carl Jiang
Factor	VULB 9163_07099_3m	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

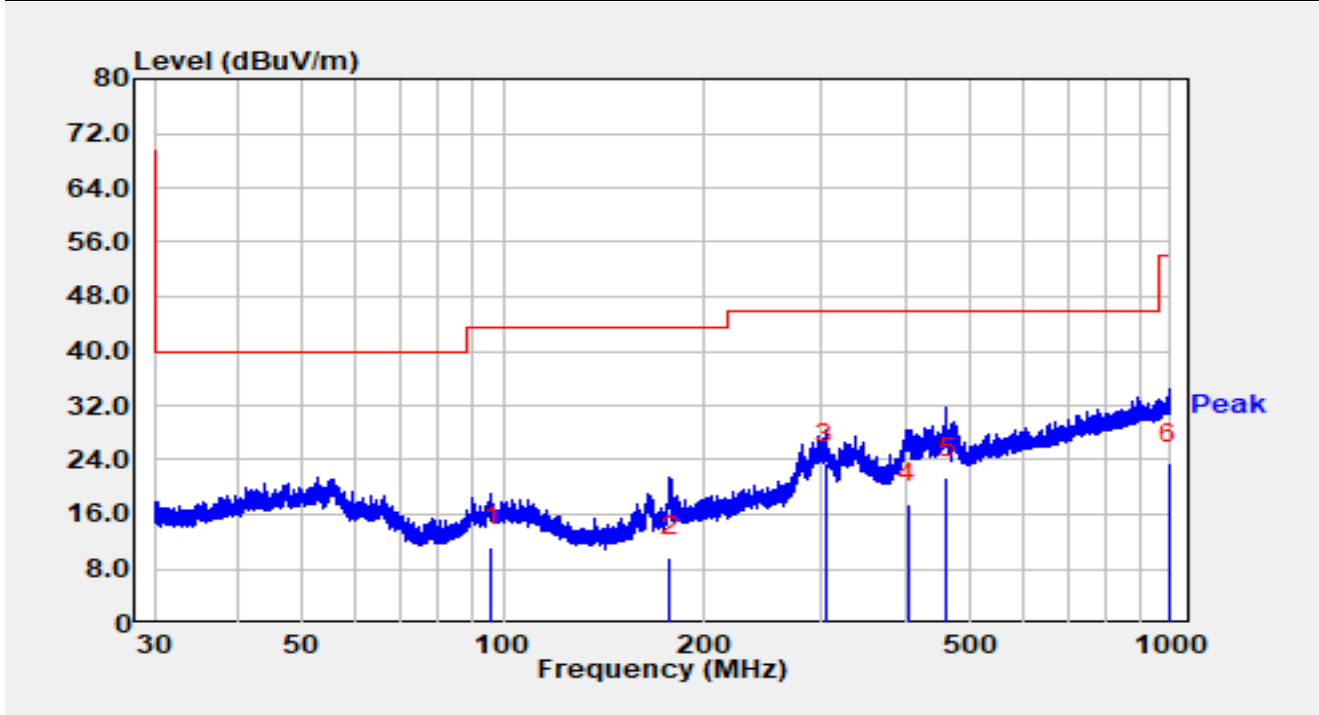


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		96.200	-5.90	17.17	11.27	-32.23	43.50	QP
2		177.385	-6.10	15.78	9.68	-33.82	43.50	QP
3	*	303.757	2.70	20.70	23.40	-22.60	46.00	QP
4		404.950	-5.70	23.27	17.57	-28.43	46.00	QP
5		460.889	-2.80	24.10	21.30	-24.70	46.00	QP
6		994.754	-8.10	31.53	23.43	-30.57	54.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-18
Temperature	17.2 °C	Humidity	31.9 %
Limit	FCC_Part 15.209_RSE (3m)_QP	Test Engineer	Carl Jiang
Factor	VULB 9163_07099_3m	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

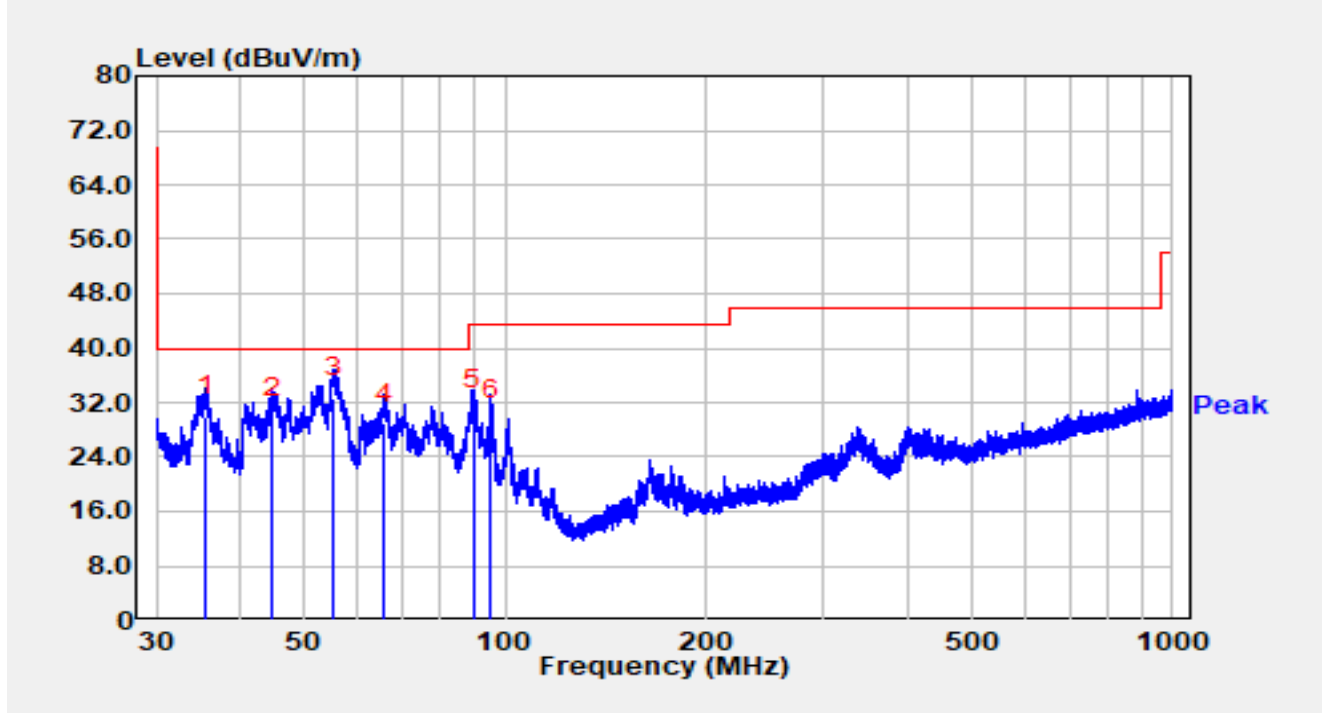


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		35.524	12.70	17.26	29.96	-10.04	40.00	QP
2		44.853	10.20	19.55	29.75	-10.25	40.00	QP
3	*	55.279	13.50	19.13	32.63	-7.37	40.00	QP
4		66.011	11.90	17.06	28.96	-11.04	40.00	QP
5		89.653	15.10	15.94	31.04	-12.46	43.50	QP
6		95.293	12.40	17.03	29.43	-14.07	43.50	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Result of Radiated Emission Above 18GHz:

Site	WJ-AC2	Test Date	2025-02-15
Temperature	20.3 °C	Humidity	39.3 %
Limit	FCC_Part 15.407_RSE (3m)_PK-6G	Test Engineer	Carl Jiang
Factor	BBHA 9170_07100	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

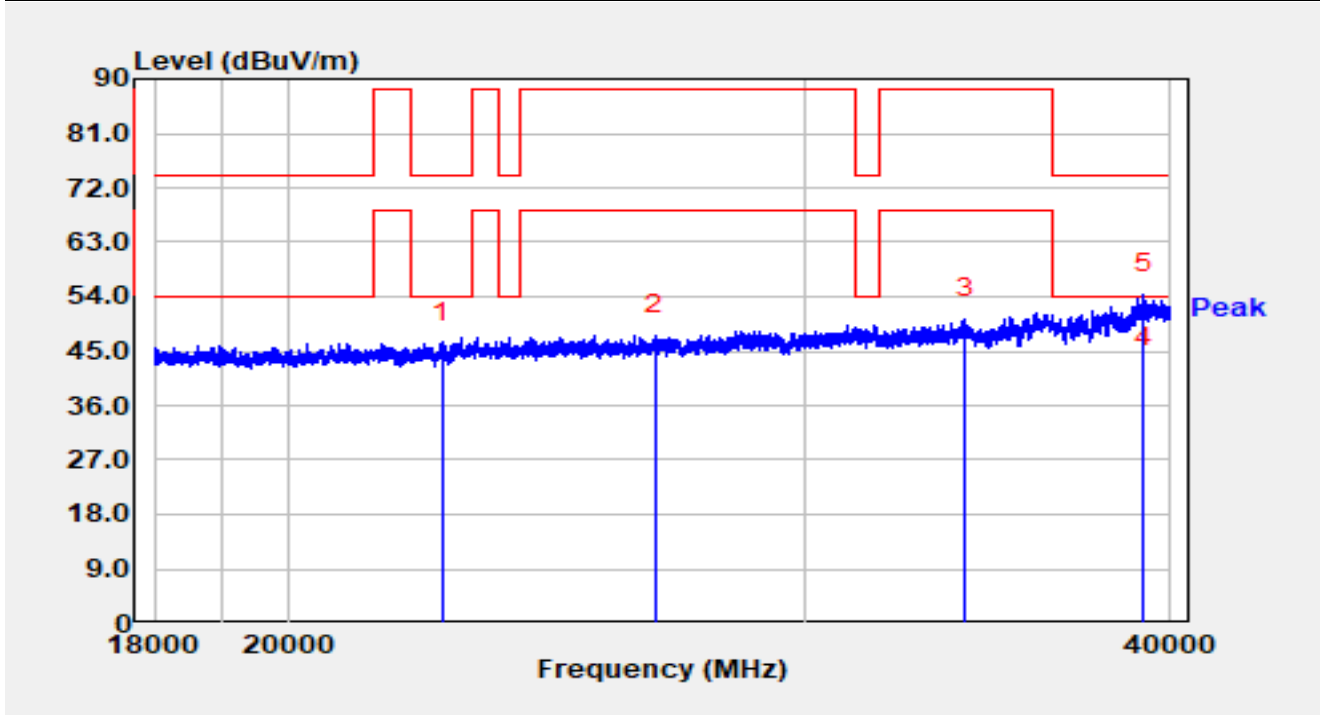


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		22558.400	51.37	-4.96	46.41	-27.59	74.00	Peak
2		26683.400	51.06	-3.40	47.66	-40.54	88.20	Peak
3		34057.800	53.82	-3.46	50.36	-37.84	88.20	Peak
4	*	39179.400	40.40	1.75	42.15	-11.85	54.00	Average
5		39179.400	52.65	1.75	54.40	-19.60	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-15
Temperature	20.3 °C	Humidity	39.3 %
Limit	FCC_Part 15.407_RSE (3m)_PK-6G	Test Engineer	Carl Jiang
Factor	BBHA 9170_07100	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

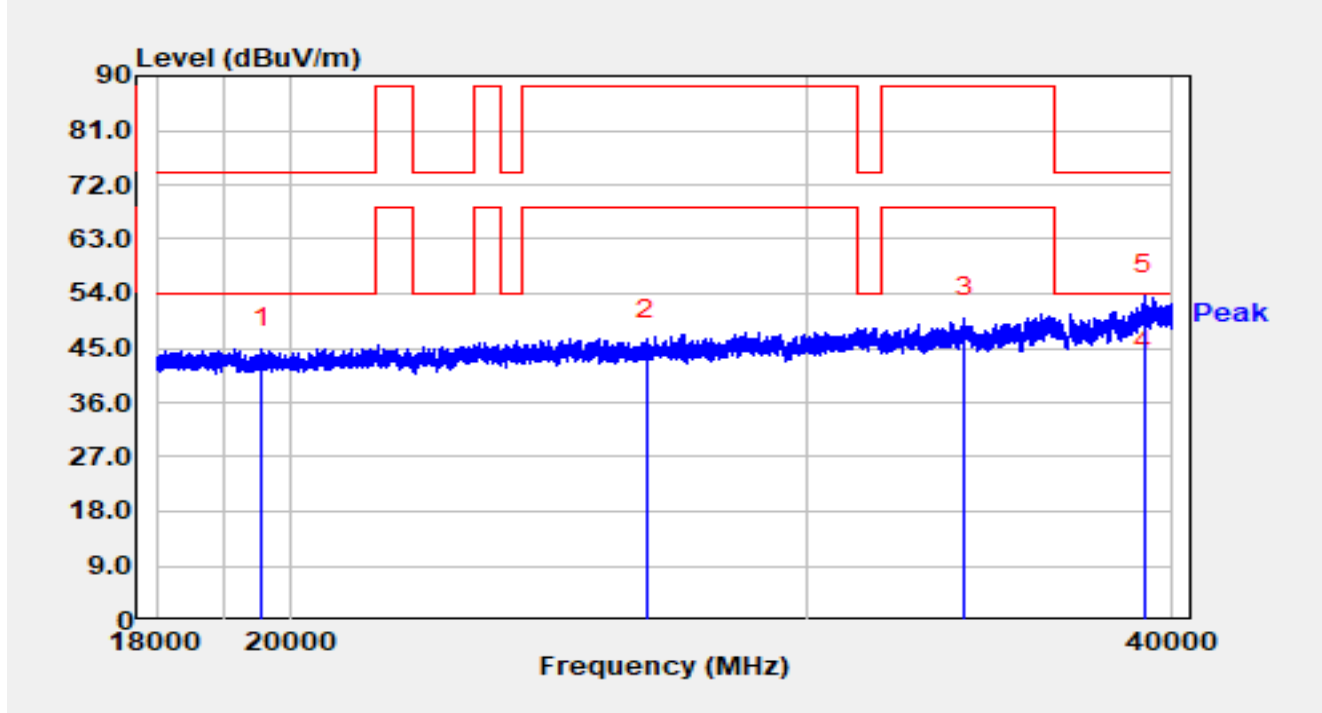


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		19559.800	53.02	-8.09	44.94	-29.06	74.00	Peak
2		26470.000	50.47	-3.97	46.50	-41.70	88.20	Peak
3		33983.000	53.23	-3.27	49.96	-38.24	88.20	Peak
4	*	39124.400	39.60	1.75	41.35	-12.65	54.00	Average
5		39124.400	51.95	1.75	53.69	-20.31	74.00	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

A.9 Radiated Restricted Band Edge Test Result

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

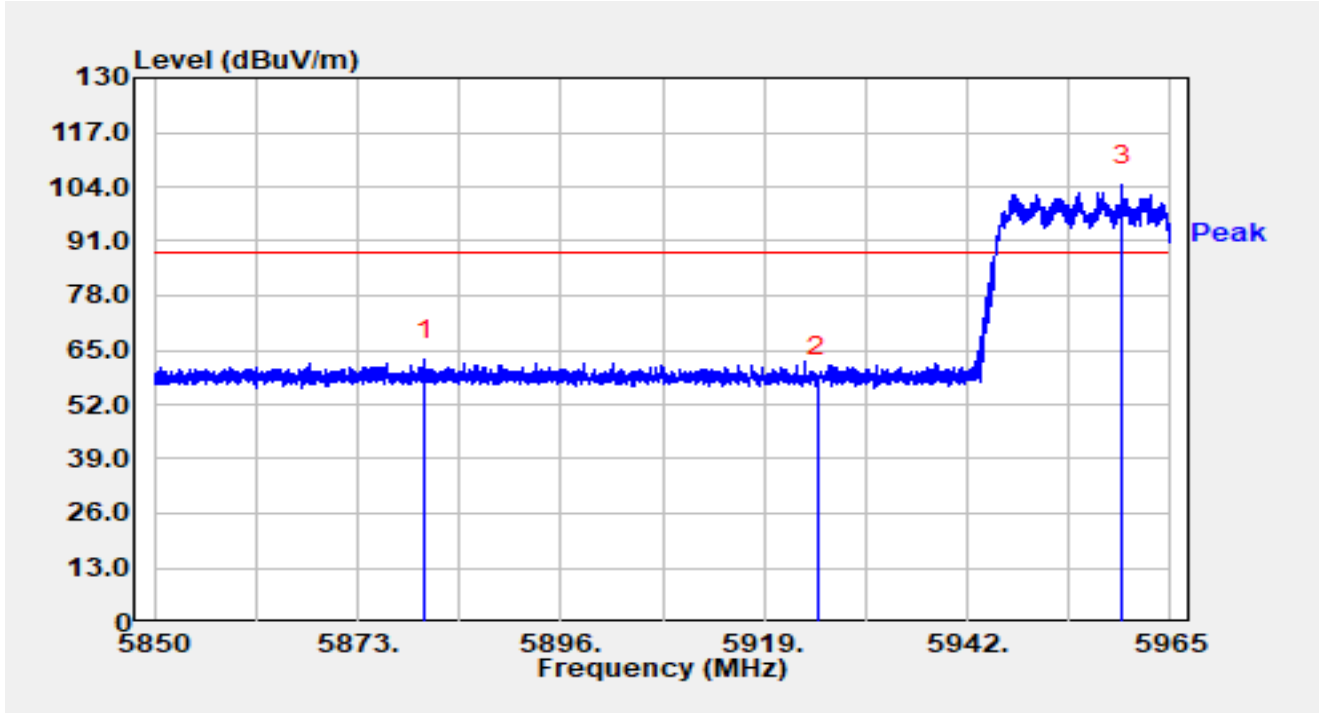


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5880.659	45.16	17.40	62.56	-25.64	88.20	Peak
2		5925.000	41.26	17.36	58.63	-29.57	88.20	Peak
3	*	5959.526	86.79	17.46	104.26	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

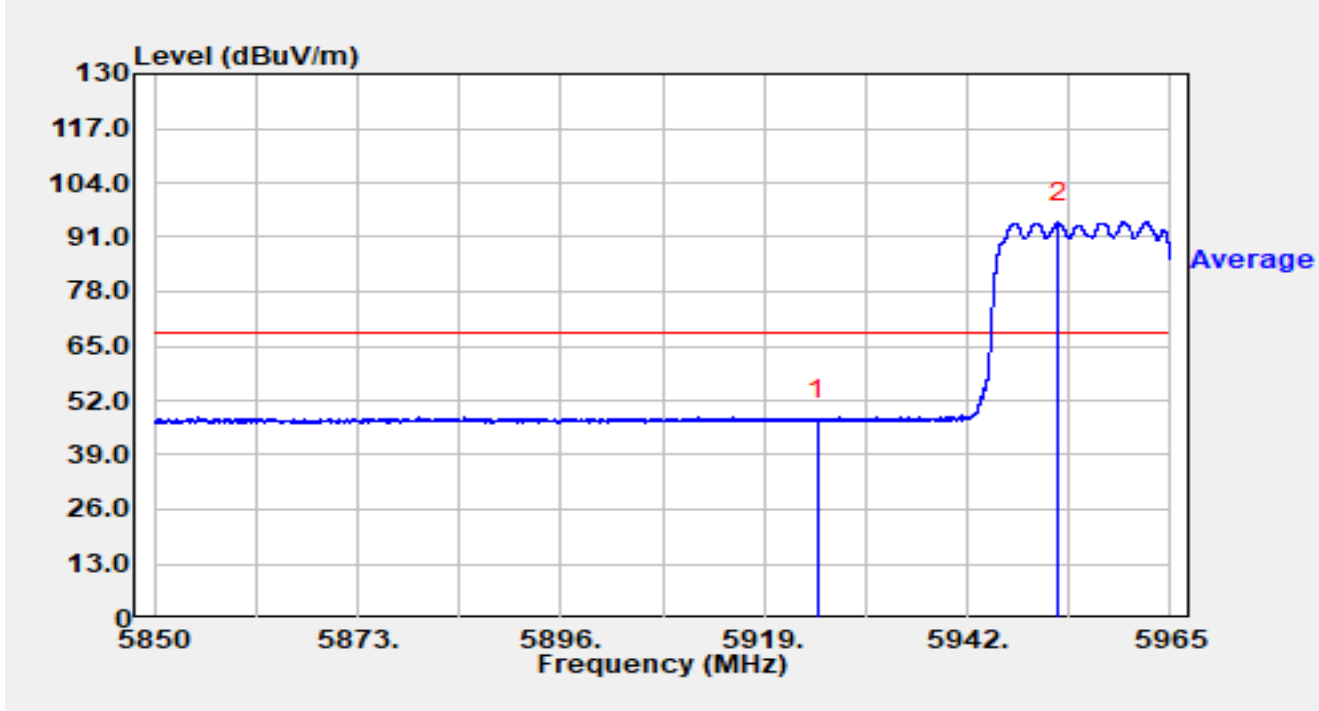


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	29.84	17.36	47.20	-21.00	68.20	Average
2	*	5952.304	77.19	17.45	94.65	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

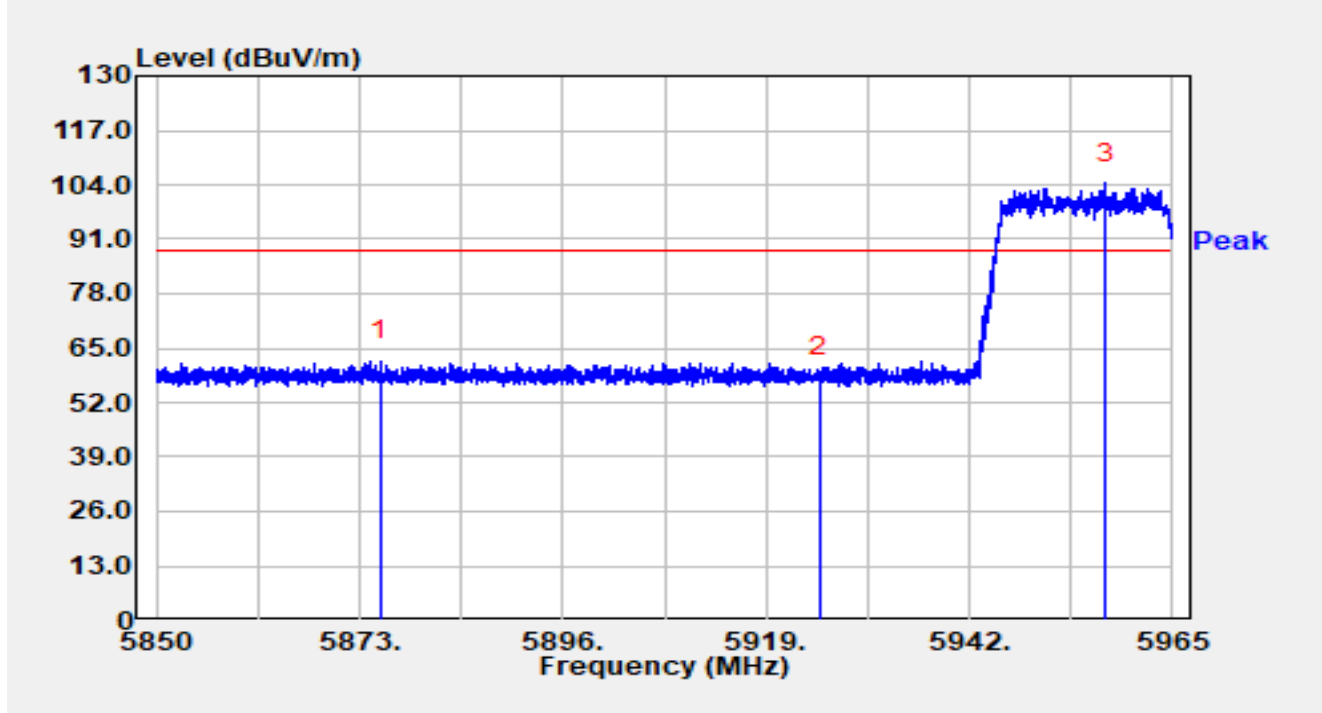


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5875.403	44.62	17.38	62.00	-26.20	88.20	Peak
2		5925.000	40.96	17.36	58.32	-29.88	88.20	Peak
3	*	5957.444	86.87	17.46	104.33	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

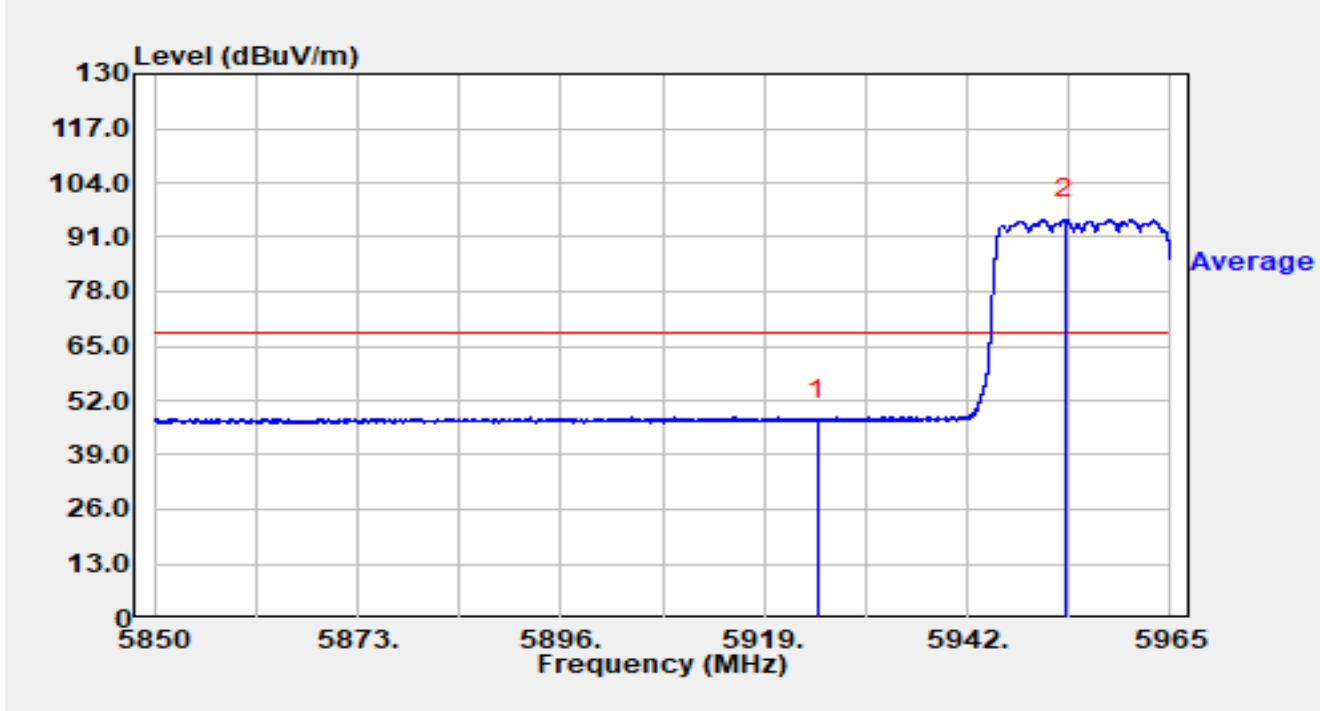


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	29.76	17.36	47.12	-21.08	68.20	Average
2	*	5952.994	77.75	17.45	95.20	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 7095MHz		

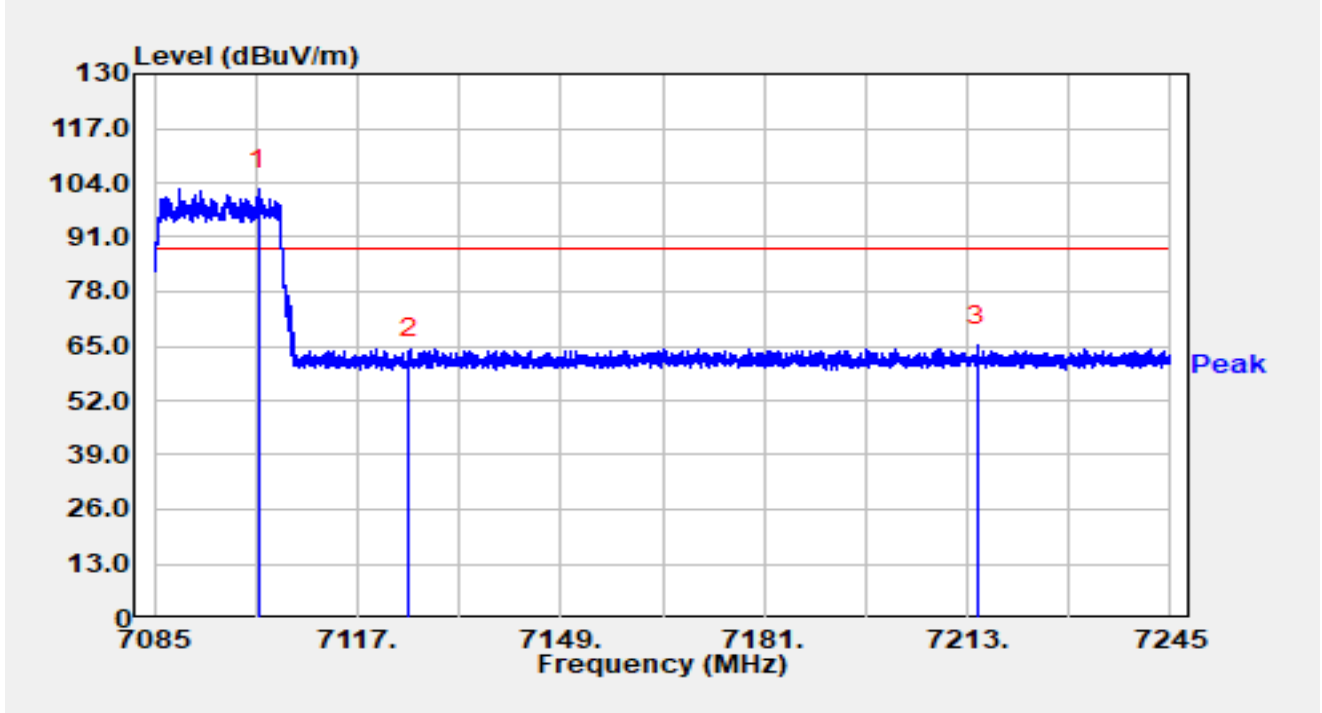


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	7101.368	81.90	20.49	102.40	N/A	N/A	Peak
2		7125.000	41.57	20.42	61.99	-26.21	88.20	Peak
3		7214.568	44.54	20.59	65.13	-23.07	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 7095MHz		

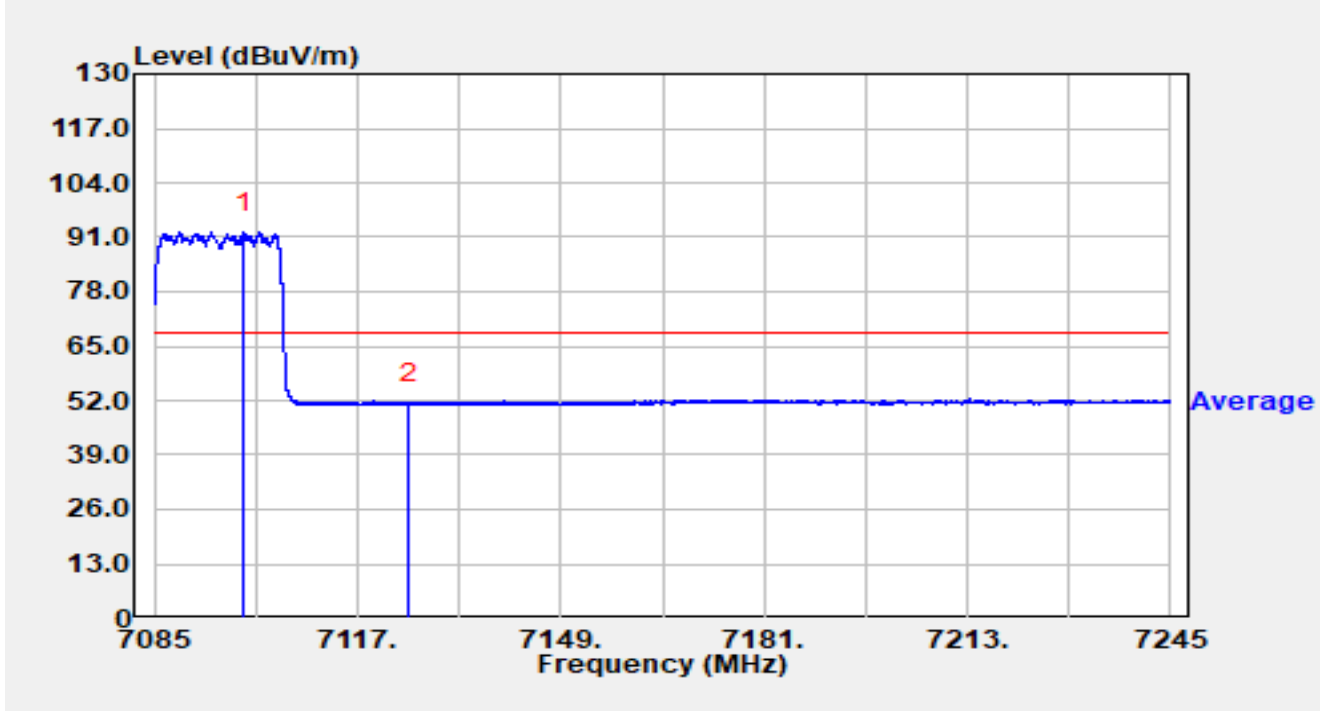


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7099.048	71.63	20.50	92.13	N/A	N/A	Average
2		7125.000	30.82	20.42	51.24	-16.96	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 7095MHz		

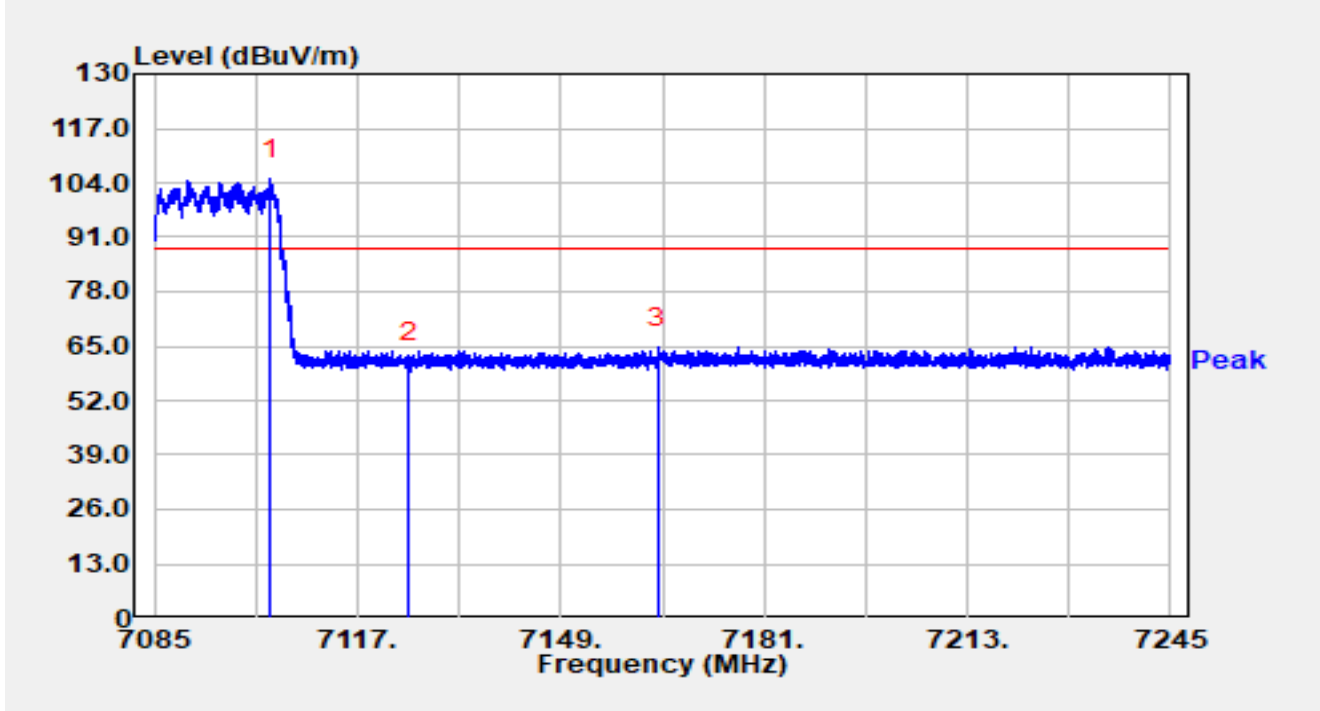


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7103.240	84.44	20.49	104.94	N/A	N/A	Peak
2		7125.000	40.55	20.42	60.97	-27.23	88.20	Peak
3		7164.280	44.00	20.61	64.62	-23.58	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 7095MHz		

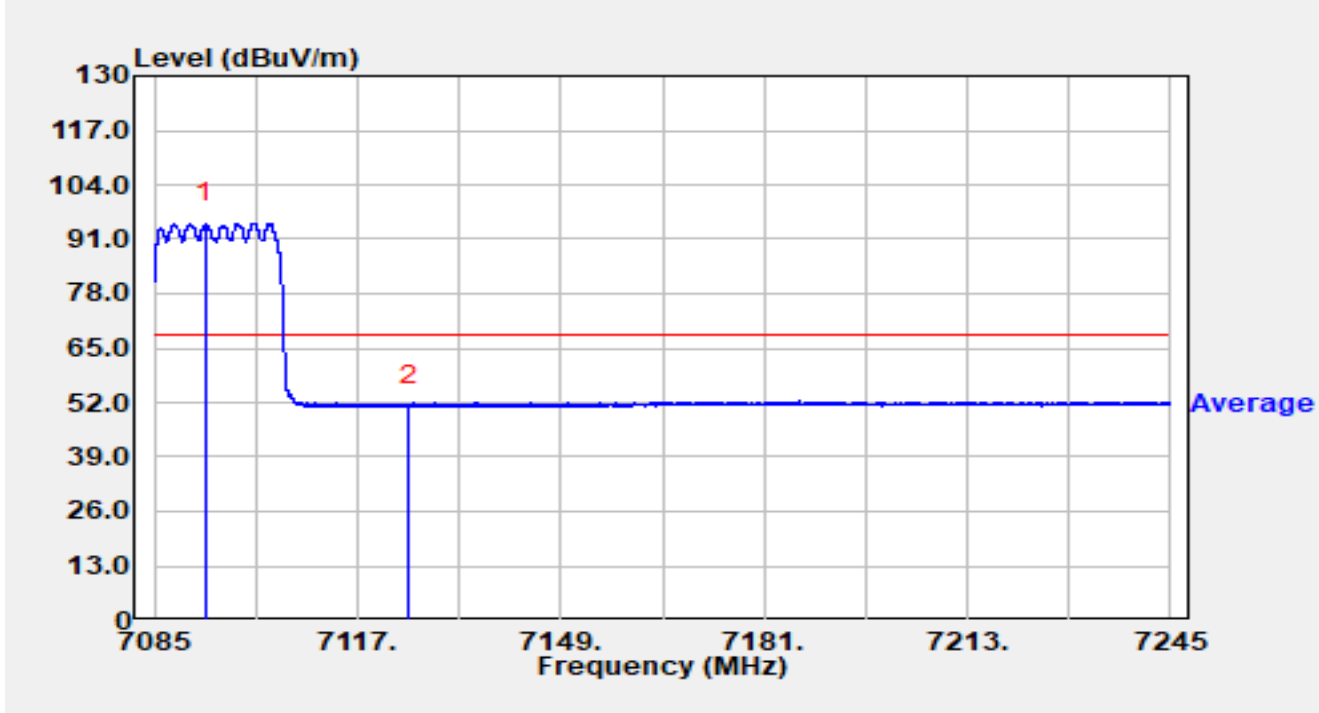


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7093.032	74.27	20.50	94.77	N/A	N/A	Average
2		7125.000	30.93	20.42	51.36	-16.84	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

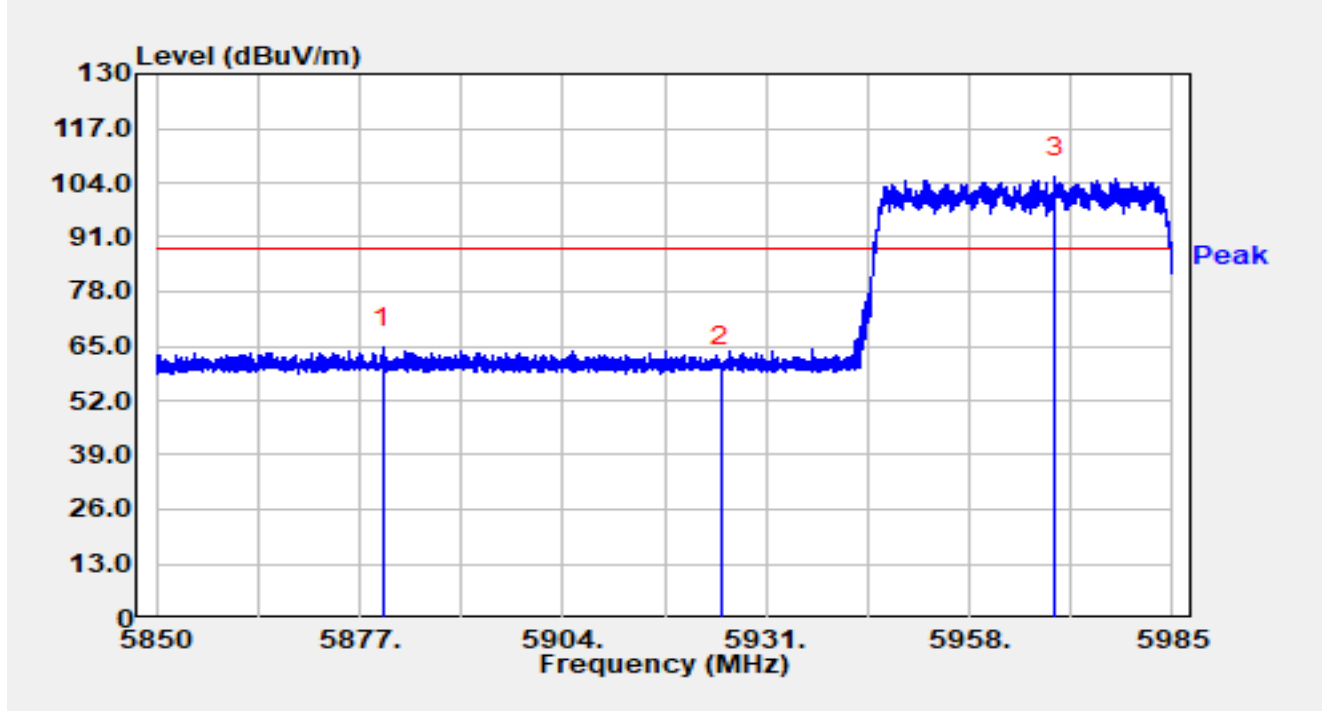


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5880.091	47.20	17.40	64.61	-23.59	88.20	Peak
2		5925.000	42.53	17.36	59.89	-28.31	88.20	Peak
3	*	5969.354	87.85	17.51	105.36	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

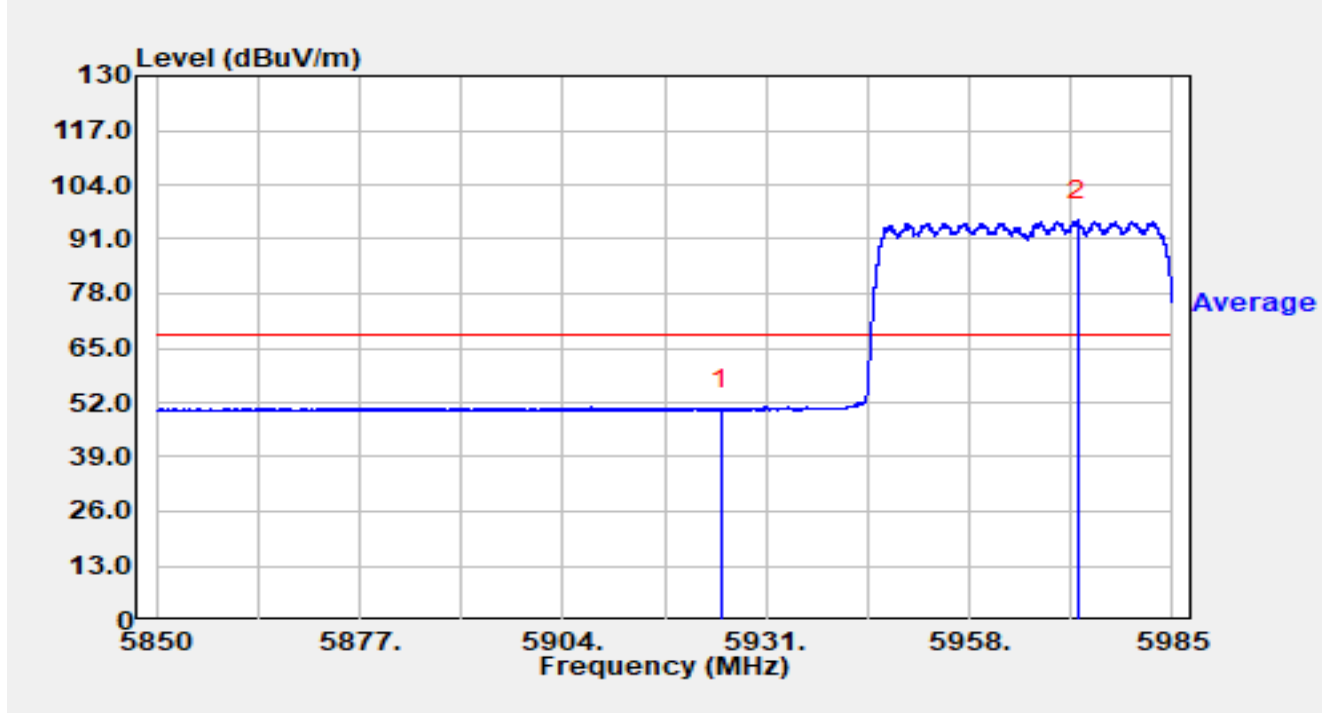


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	32.98	17.36	50.34	-17.86	68.20	Average
2	*	5972.337	77.89	17.54	95.43	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

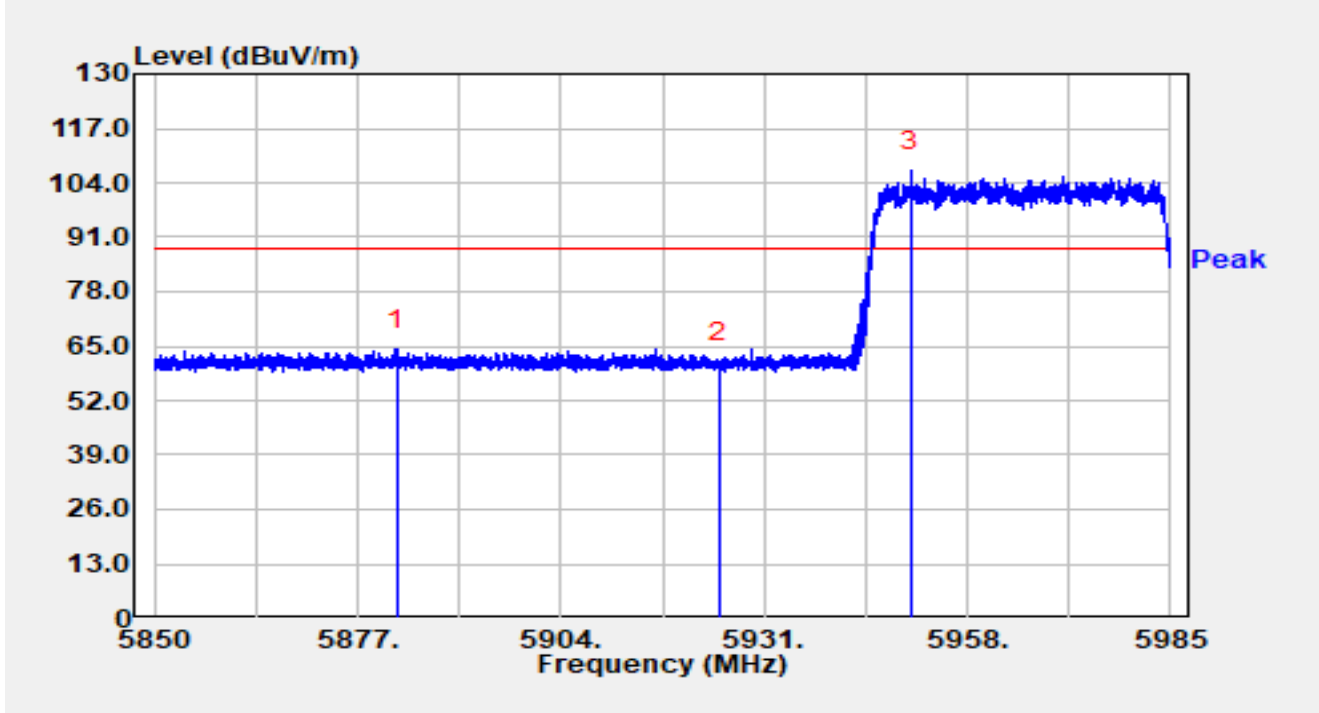


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5882.144	46.71	17.40	64.11	-24.09	88.20	Peak
2		5925.000	43.77	17.36	61.13	-27.07	88.20	Peak
3	*	5950.507	89.46	17.45	106.91	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

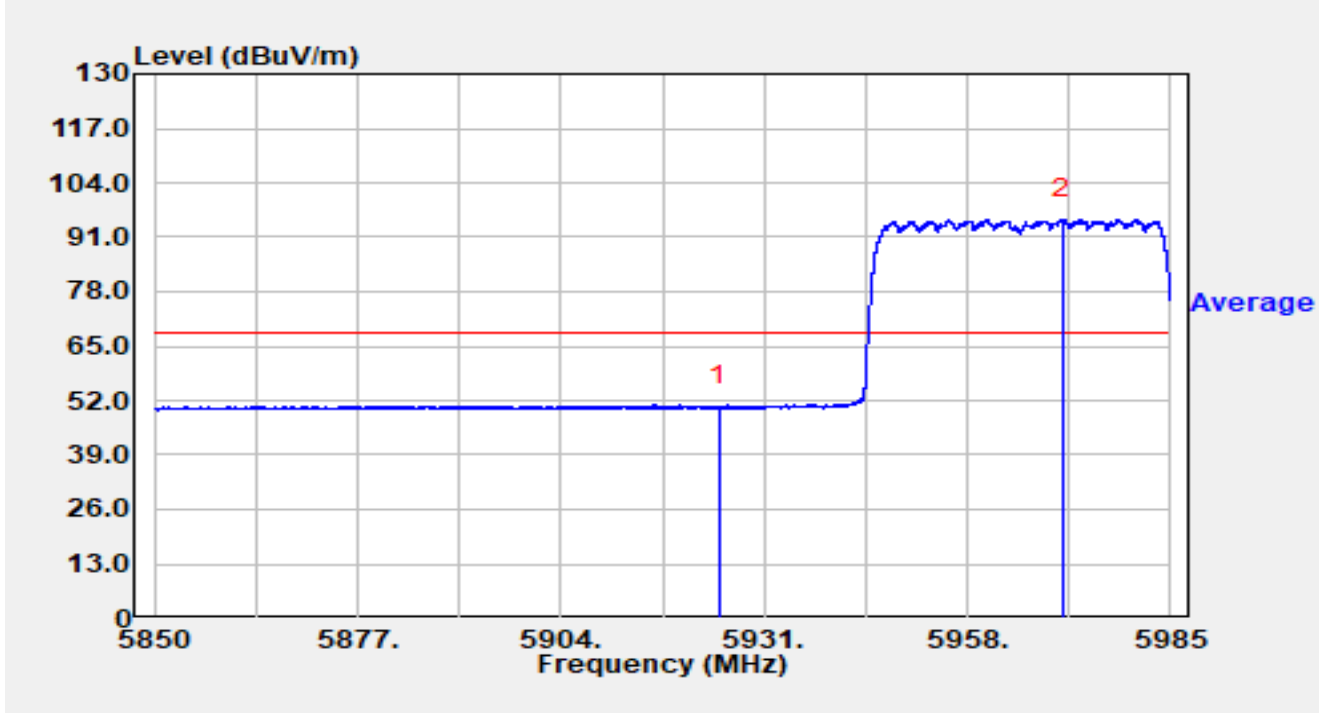


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	33.32	17.36	50.68	-17.52	68.20	Average
2	*	5970.717	77.85	17.52	95.38	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

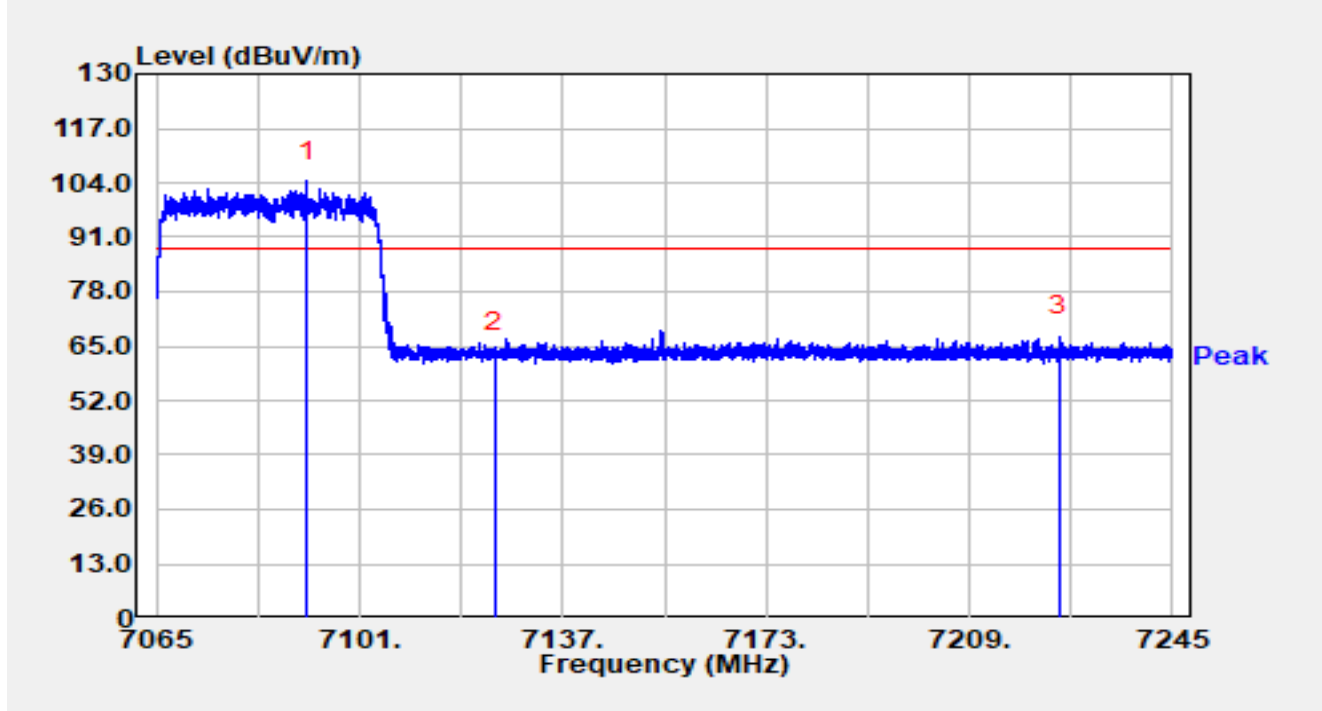


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7091.640	83.86	20.50	104.35	N/A	N/A	Peak
2		7125.000	42.93	20.42	63.36	-24.84	88.20	Peak
3		7224.894	46.69	20.57	67.26	-20.94	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

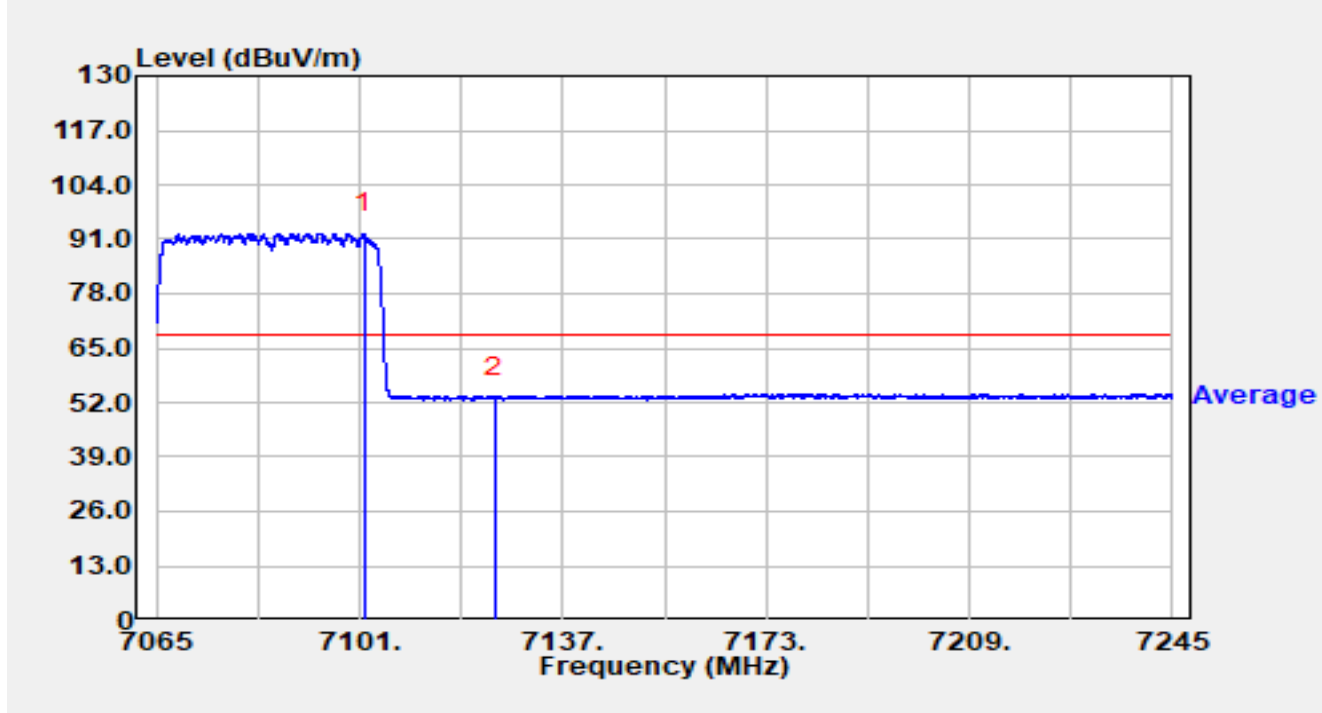


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7101.792	71.94	20.49	92.43	N/A	N/A	Average
2		7125.000	32.88	20.42	53.31	-14.89	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

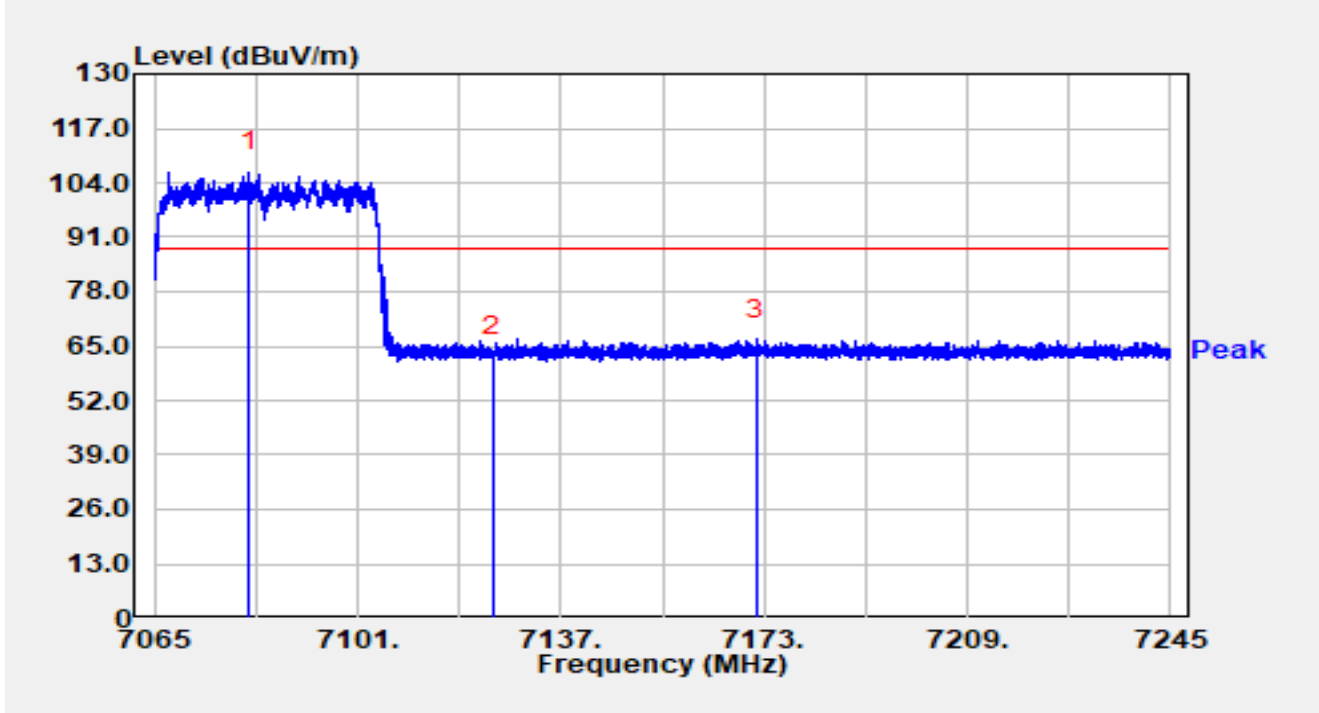


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7081.812	86.13	20.45	106.58	N/A	N/A	Peak
2		7125.000	42.11	20.42	62.54	-25.66	88.20	Peak
3		7171.578	45.74	20.75	66.49	-21.71	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

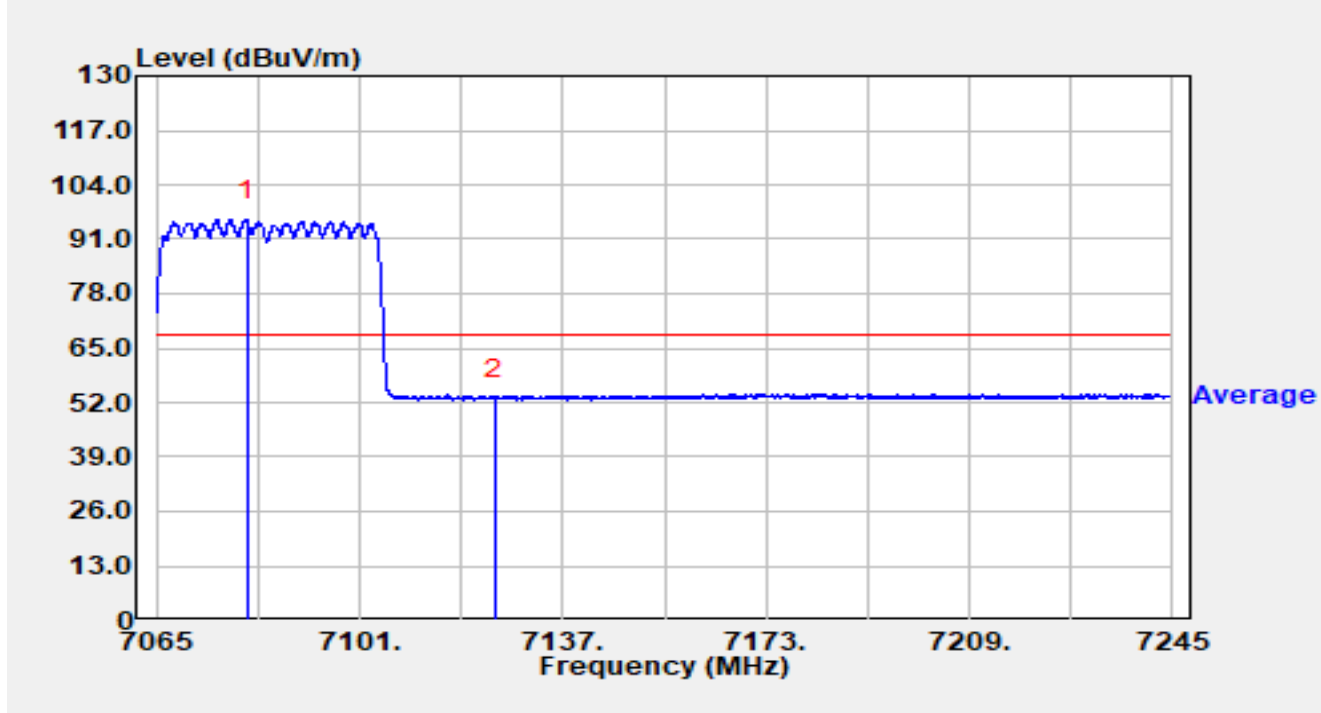


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7080.984	75.18	20.44	95.62	N/A	N/A	Average
2		7125.000	32.48	20.42	52.90	-15.30	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

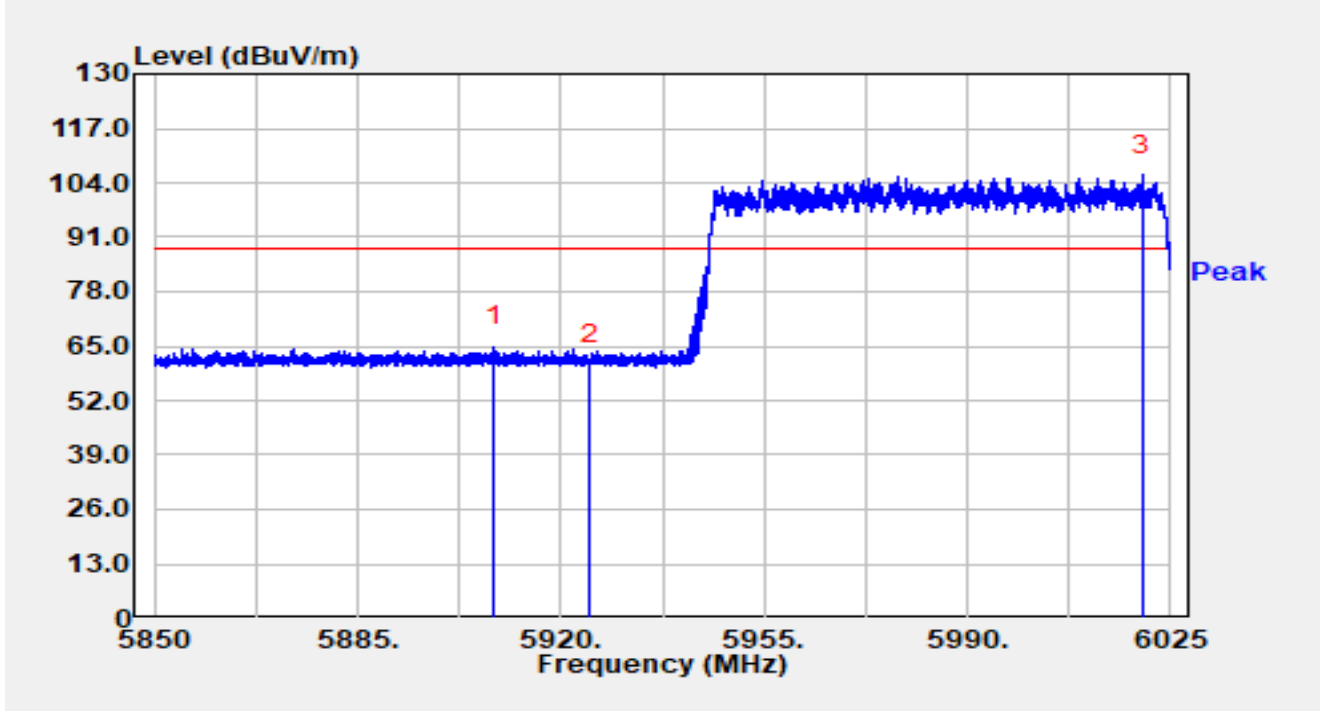


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5908.572	47.47	17.35	64.82	-23.38	88.20	Peak
2		5925.000	43.42	17.36	60.79	-27.41	88.20	Peak
3	*	6020.223	88.13	17.67	105.81	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

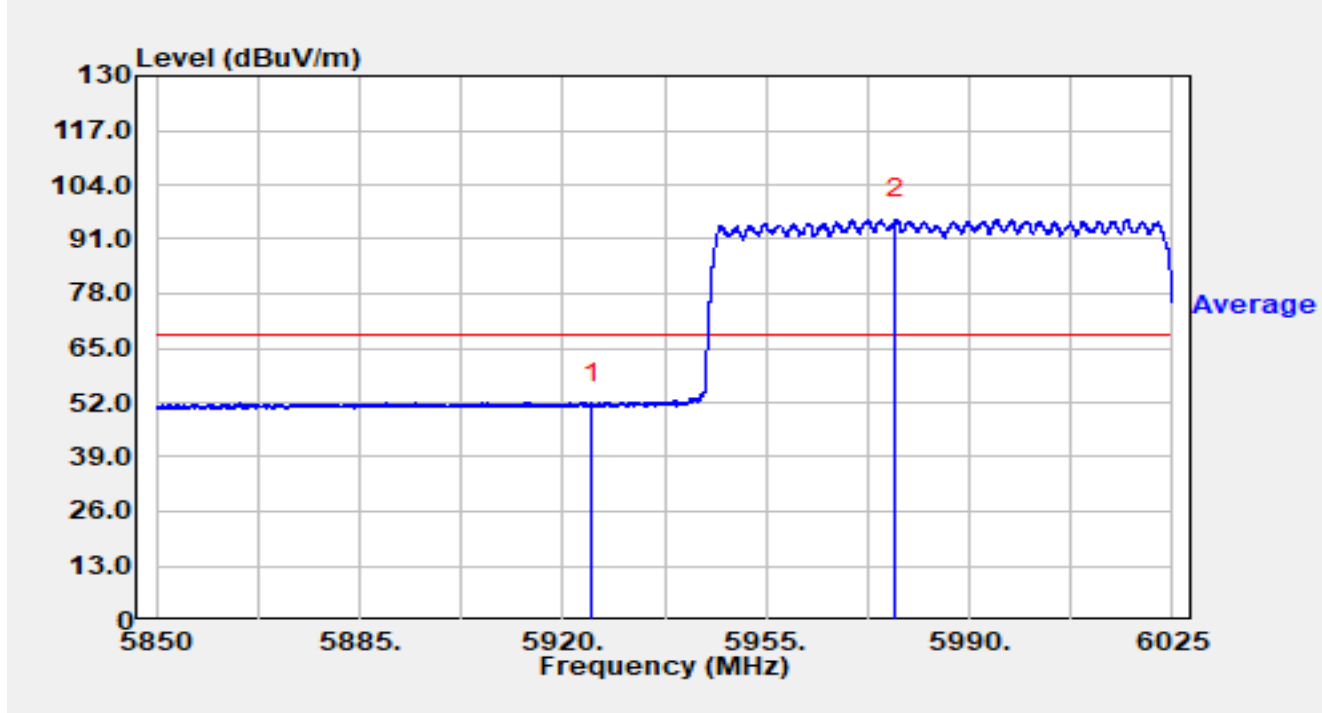


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	34.29	17.36	51.65	-16.55	68.20	Average
2	*	5977.313	78.26	17.58	95.84	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

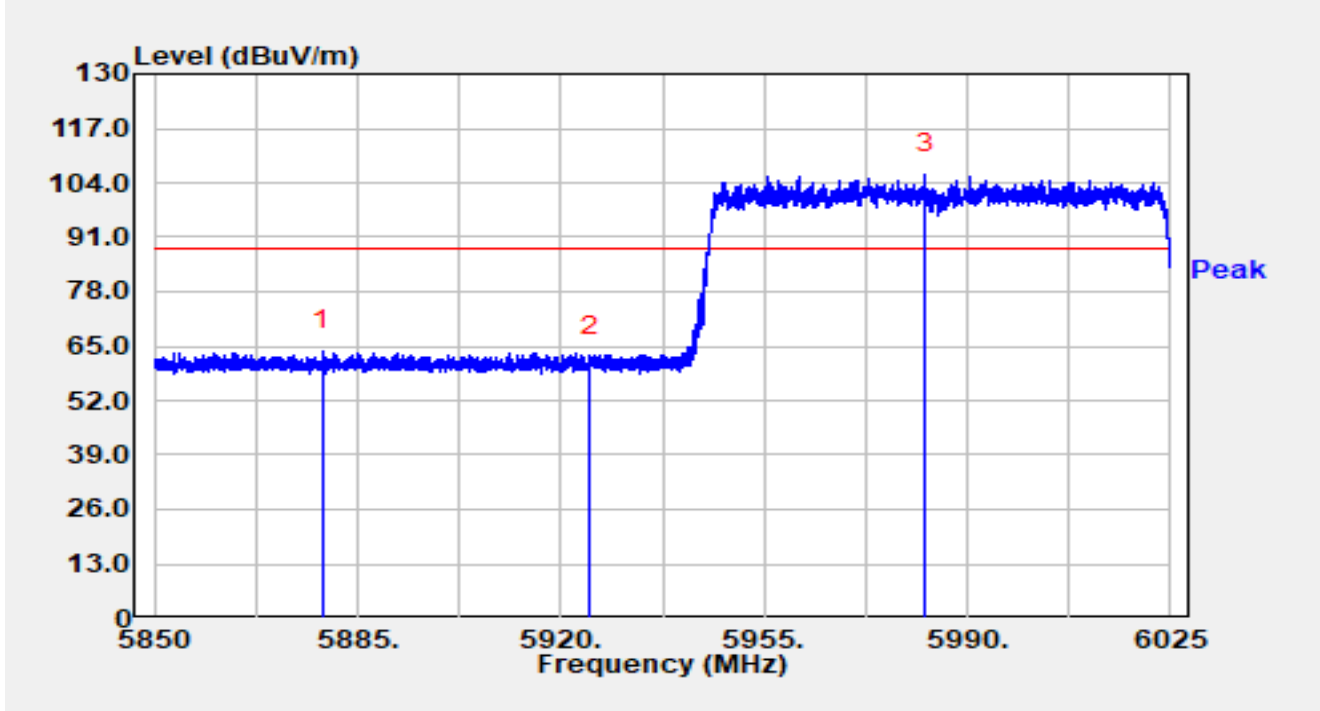


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5878.928	46.52	17.40	63.92	-24.28	88.20	Peak
2		5925.000	45.09	17.36	62.46	-25.74	88.20	Peak
3	*	5982.685	88.63	17.57	106.19	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

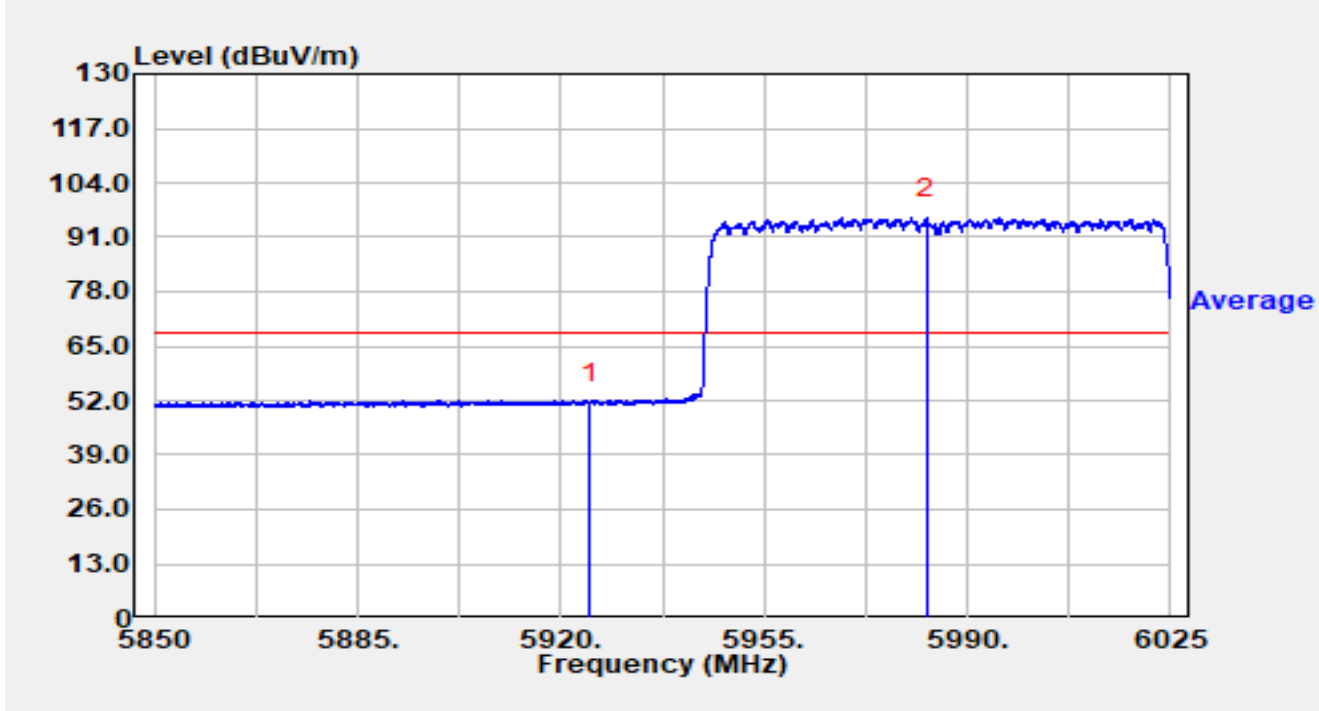


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	33.90	17.36	51.26	-16.94	68.20	Average
2	*	5983.087	78.02	17.56	95.58	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

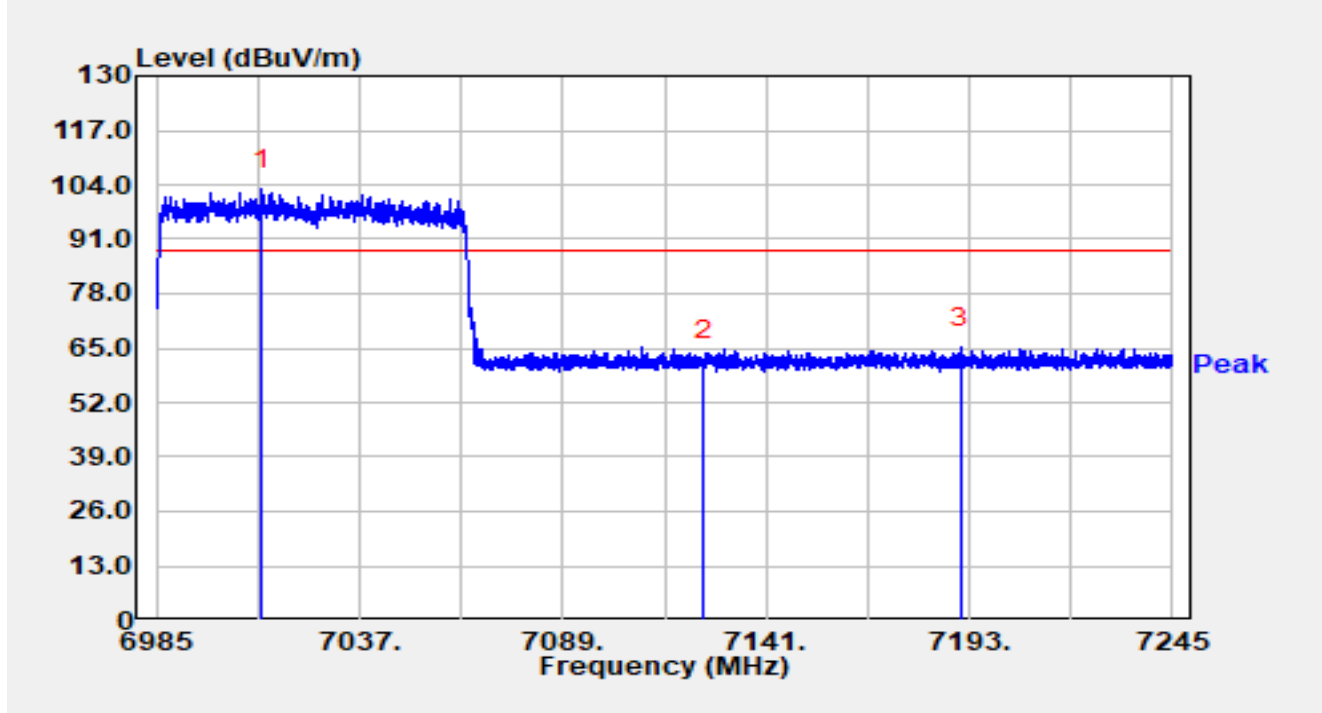


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7011.858	82.49	20.35	102.84	N/A	N/A	Peak
2		7125.000	41.81	20.42	62.23	-25.97	88.20	Peak
3		7190.764	44.50	20.67	65.18	-23.02	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

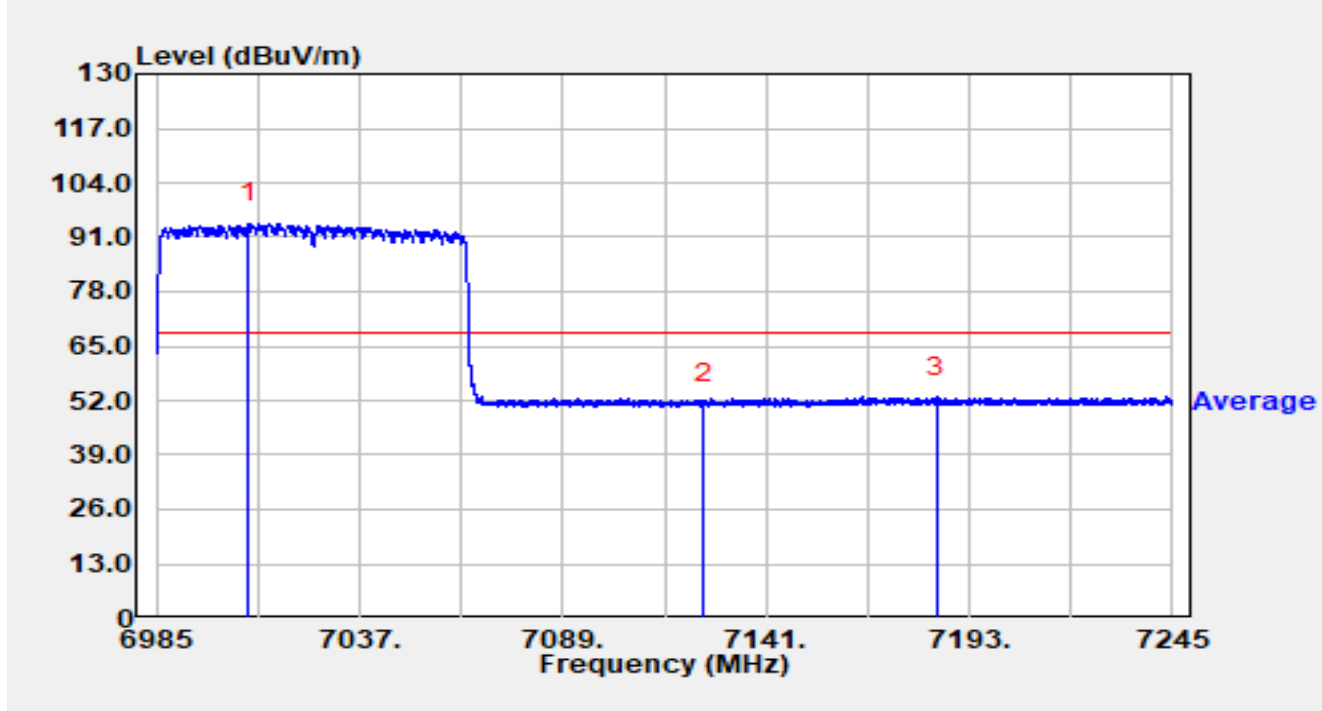


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7008.738	73.97	20.32	94.29	N/A	N/A	Average
2		7125.000	30.83	20.42	51.26	-16.94	68.20	Average
3		7184.524	32.21	20.69	52.91	-15.29	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

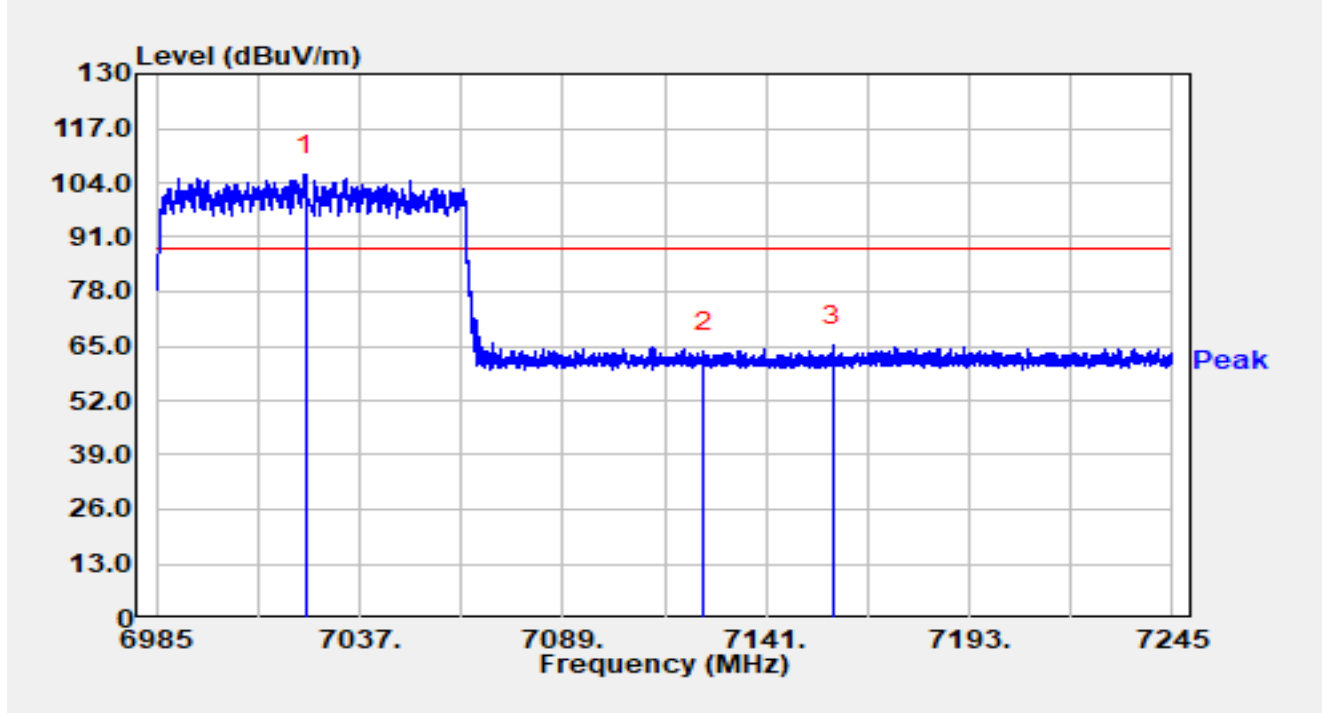


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7023.064	85.49	20.33	105.83	N/A	N/A	Peak
2		7125.000	43.03	20.42	63.46	-24.74	88.20	Peak
3		7158.108	44.56	20.47	65.03	-23.17	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

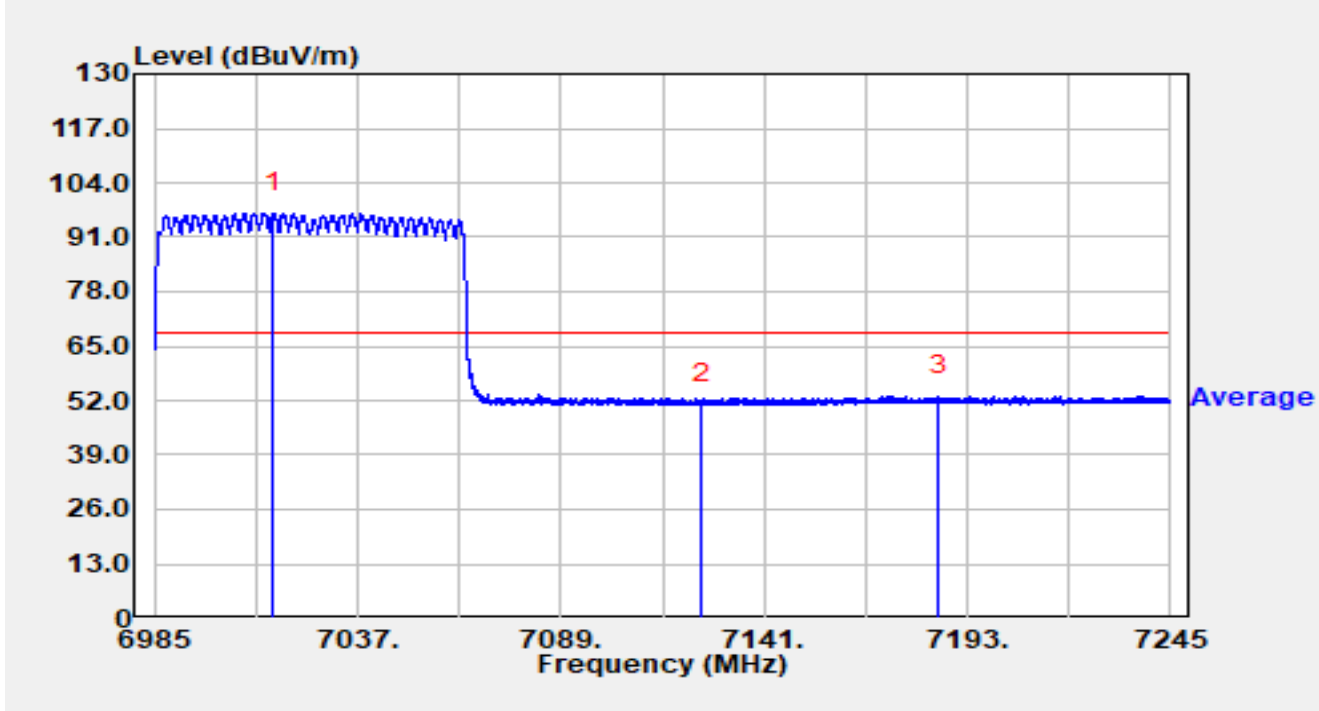


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7015.394	76.38	20.38	96.76	N/A	N/A	Average
2		7125.000	30.99	20.42	51.42	-16.78	68.20	Average
3		7185.590	32.49	20.69	53.19	-15.01	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

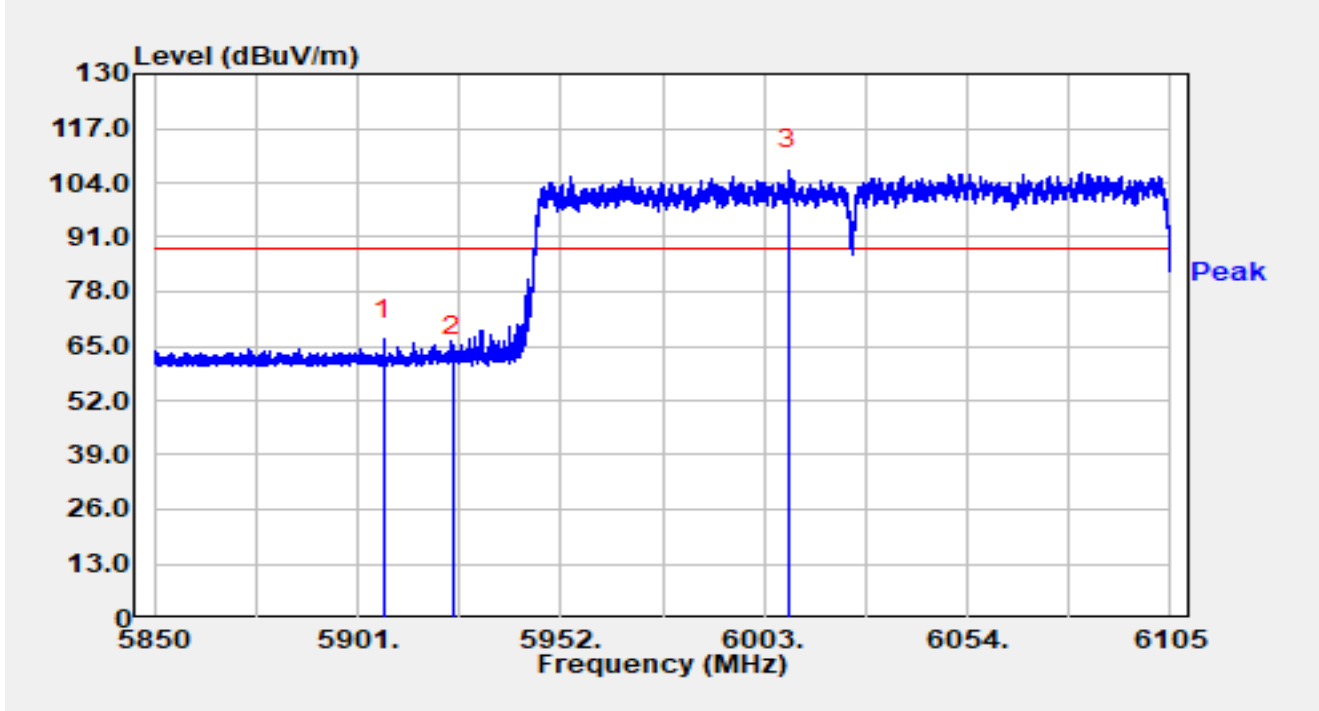


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5907.655	49.13	17.36	66.49	-21.71	88.20	Peak
2		5925.000	45.36	17.36	62.73	-25.47	88.20	Peak
3	*	6009.069	89.66	17.51	107.17	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

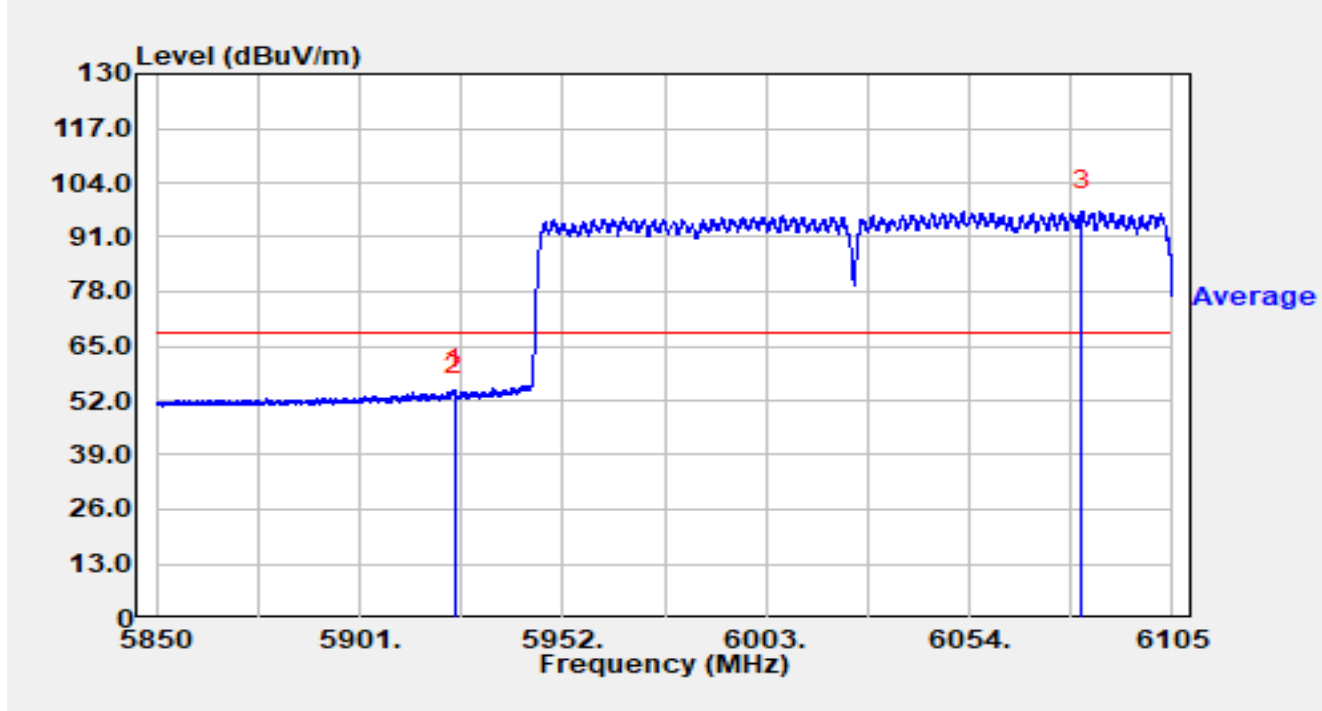


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5924.741	37.15	17.36	54.51	-13.69	68.20	Average
2		5925.000	35.99	17.36	53.35	-14.85	68.20	Average
3	*	6082.305	79.10	18.11	97.21	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

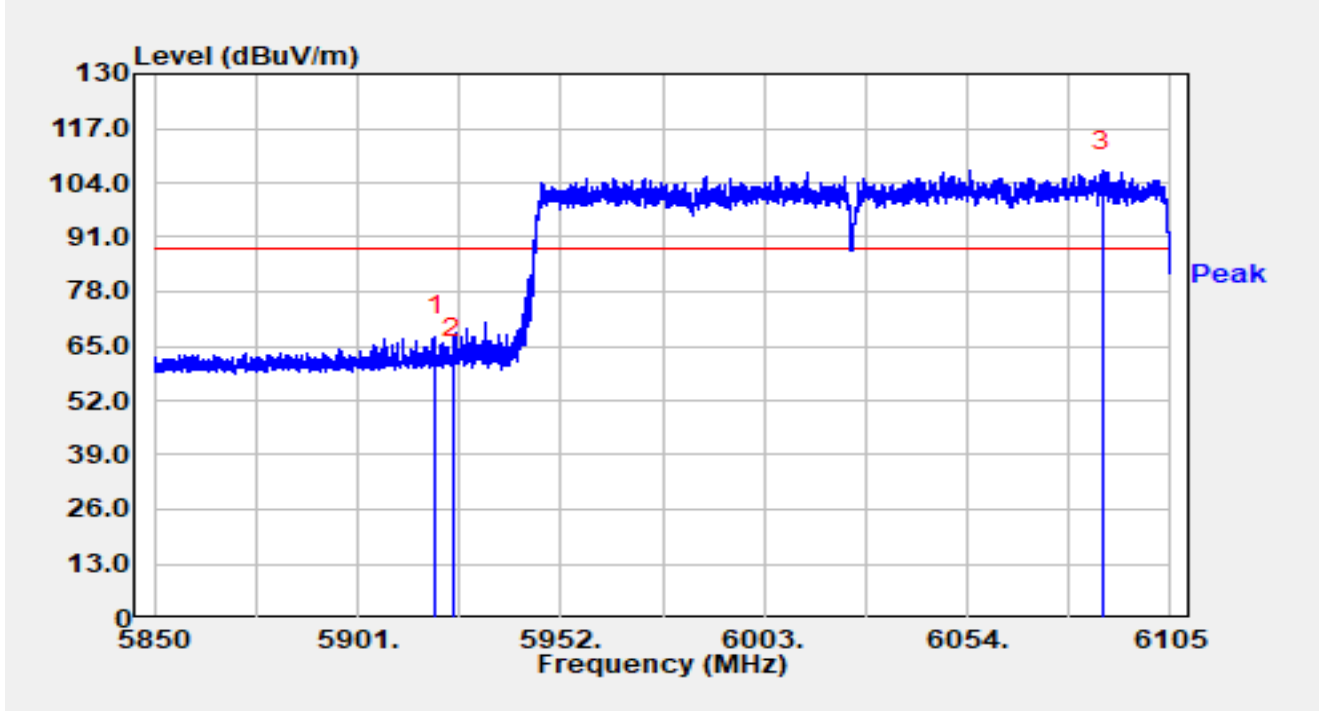


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5920.635	49.91	17.36	67.26	-20.94	88.20	Peak
2		5925.000	44.56	17.36	61.92	-26.28	88.20	Peak
3	*	6087.915	88.82	18.07	106.89	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

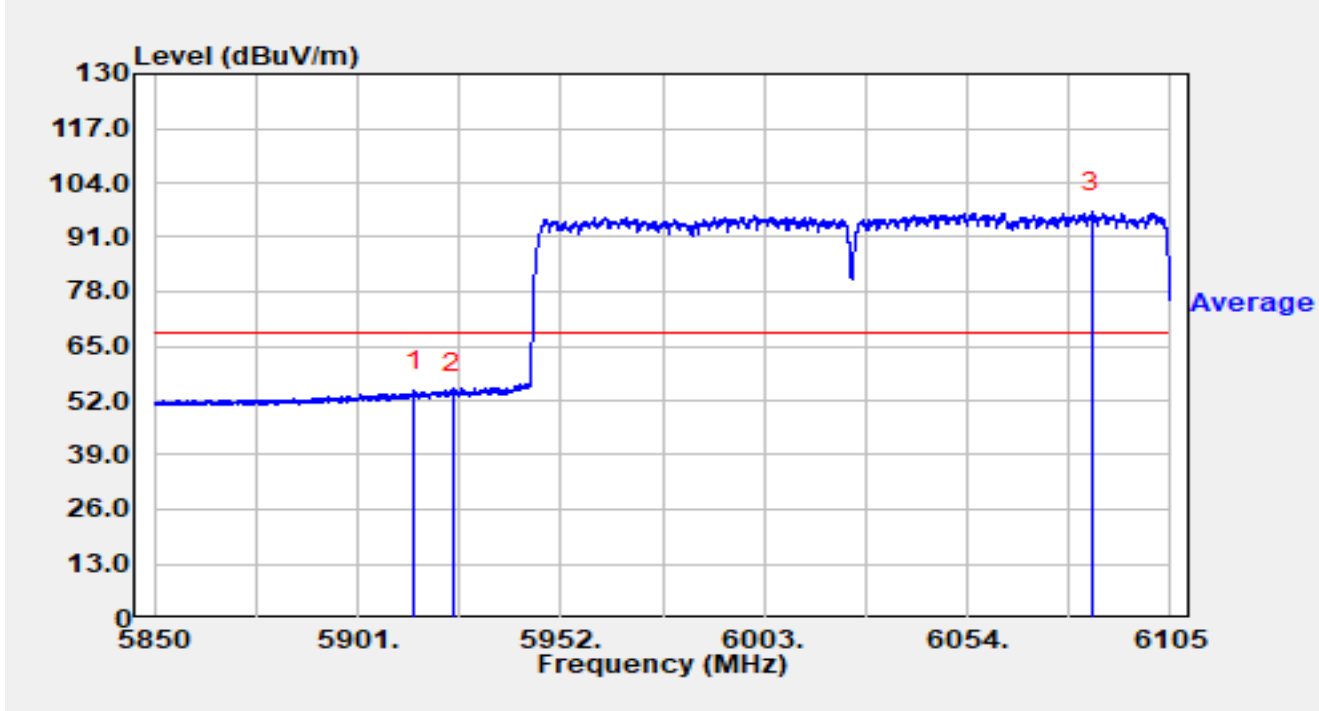


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5915.356	36.87	17.35	54.21	-13.99	68.20	Average
2		5925.000	36.18	17.36	53.55	-14.65	68.20	Average
3	*	6085.263	78.87	18.09	96.96	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

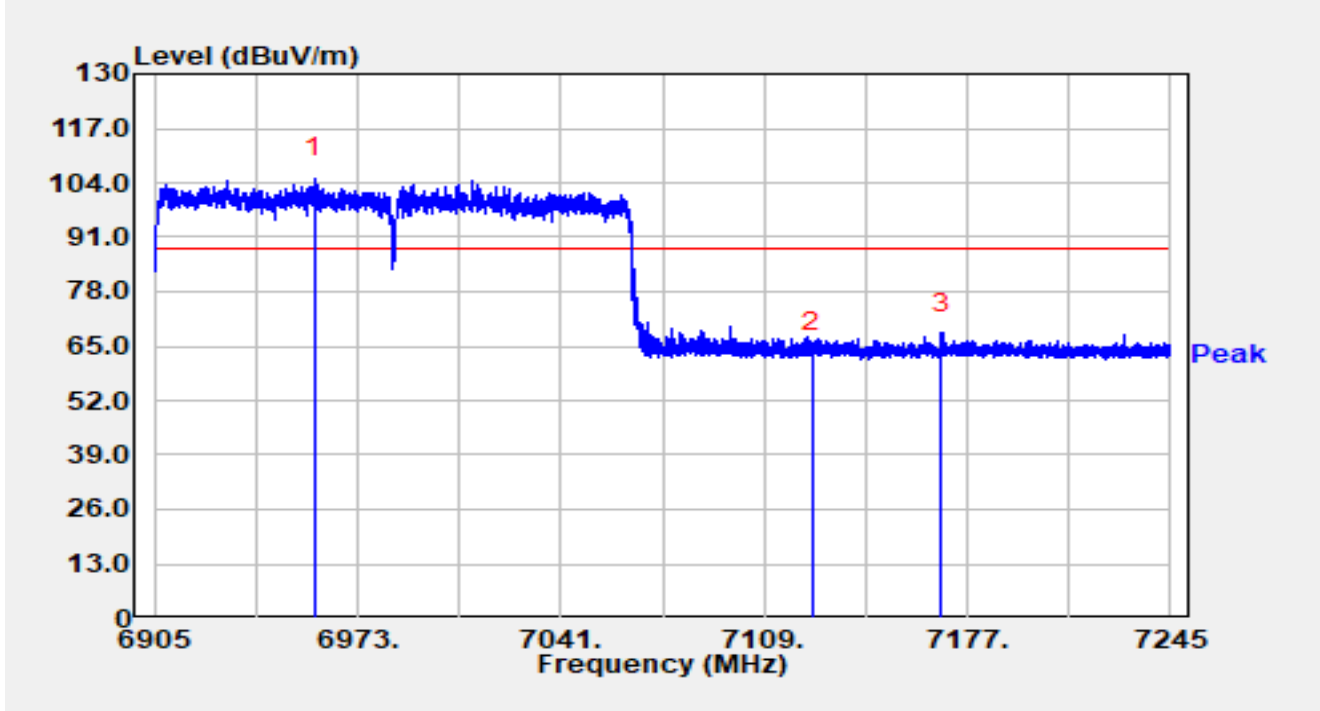


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	6958.618	84.83	20.20	105.02	N/A	N/A	Peak
2		7125.000	43.31	20.42	63.73	-24.47	88.20	Peak
3		7168.500	47.44	20.70	68.14	-20.06	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

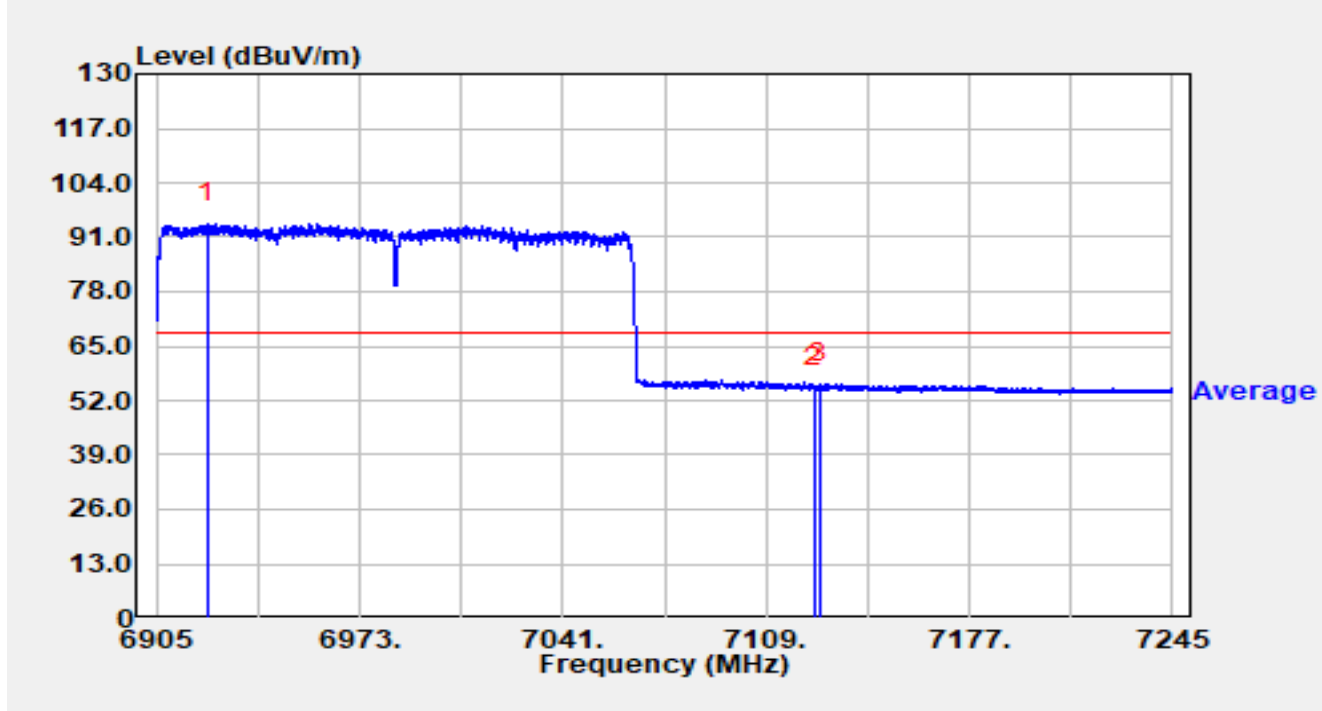


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	6922.204	74.06	20.37	94.43	N/A	N/A	Average
2		7125.000	34.76	20.42	55.19	-13.01	68.20	Average
3		7126.986	35.58	20.44	56.01	-12.19	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

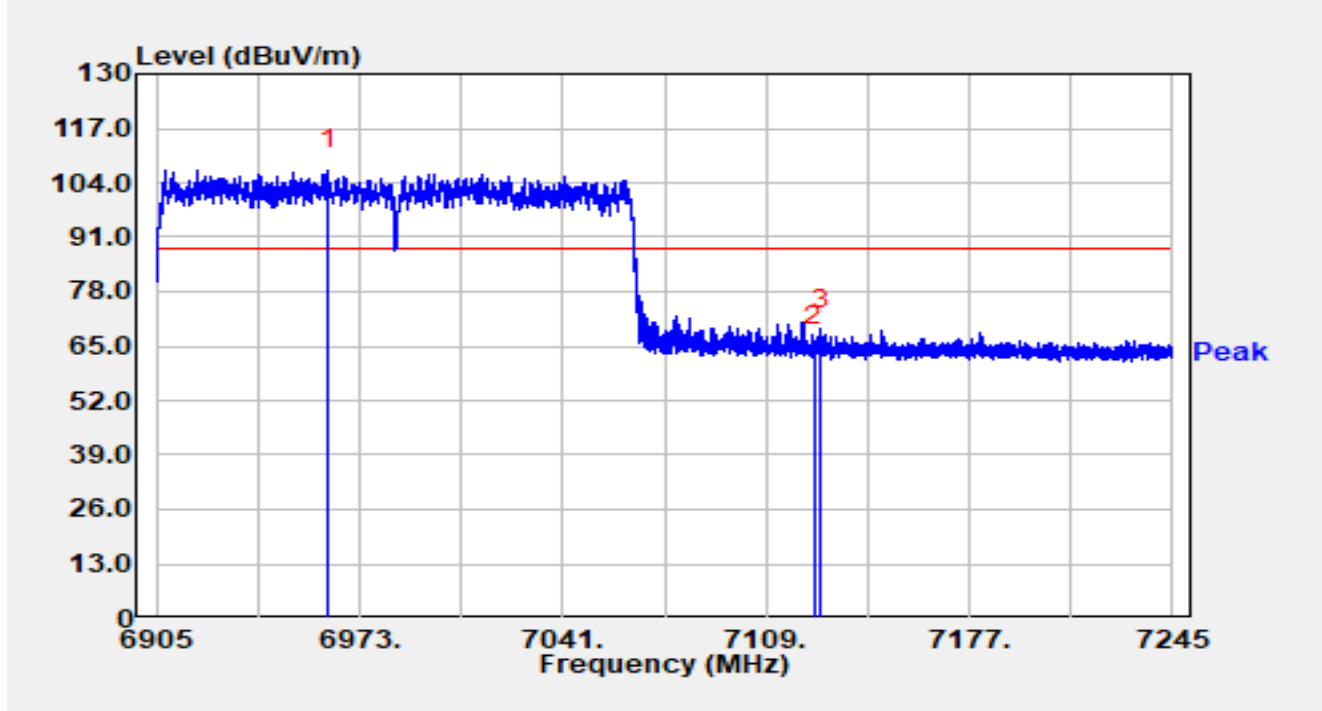


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	6962.460	87.01	20.17	107.18	N/A	N/A	Peak
2		7125.000	44.43	20.42	64.85	-23.35	88.20	Peak
3		7127.258	48.53	20.44	68.96	-19.24	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

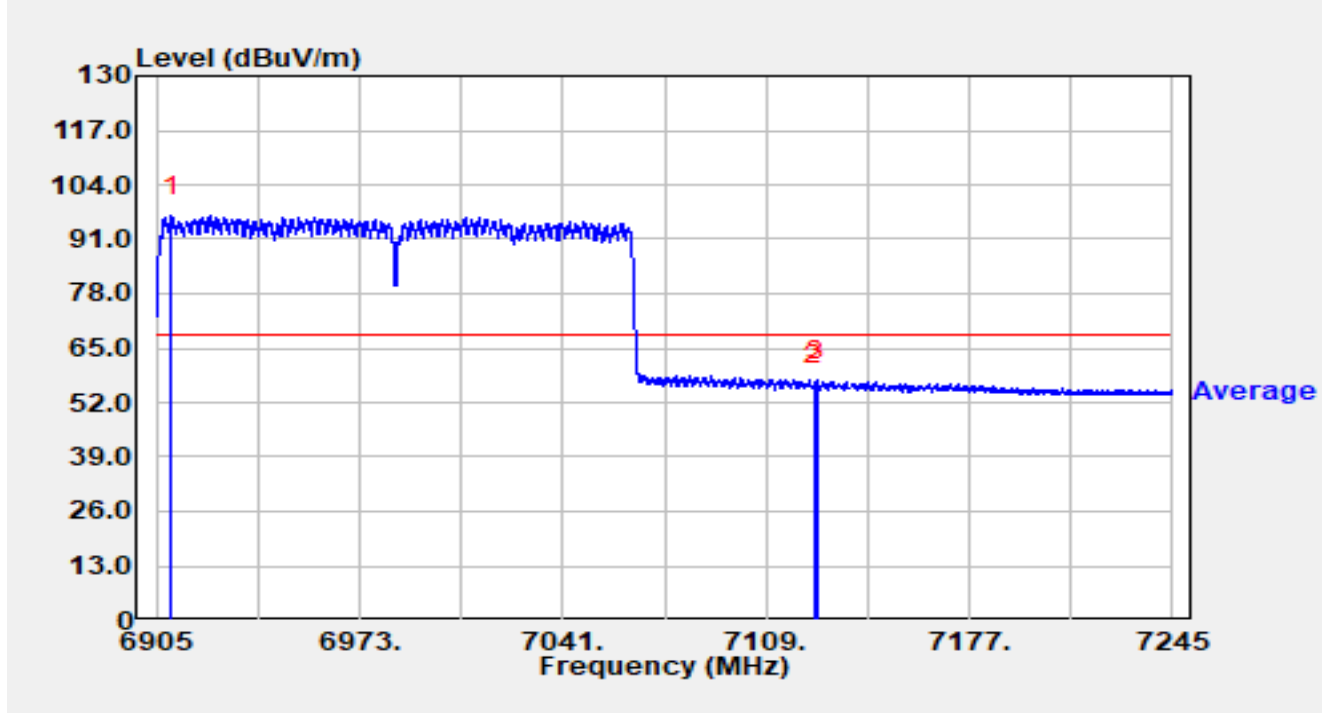


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	6909.964	76.24	20.33	96.58	N/A	N/A	Average
2		7125.000	35.73	20.42	56.15	-12.05	68.20	Average
3		7125.796	36.83	20.43	57.26	-10.94	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

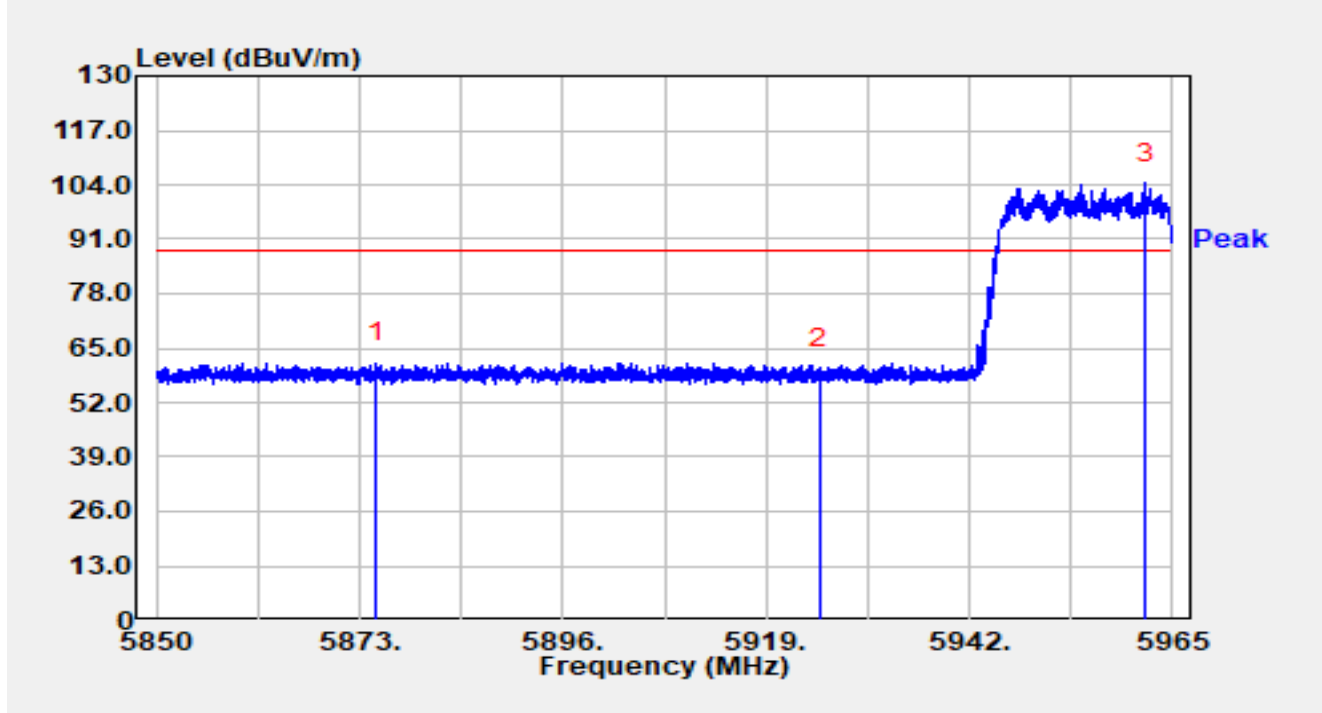


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5874.875	44.19	17.38	61.57	-26.63	88.20	Peak
2		5925.000	42.85	17.36	60.21	-27.99	88.20	Peak
3	*	5961.976	87.02	17.47	104.49	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

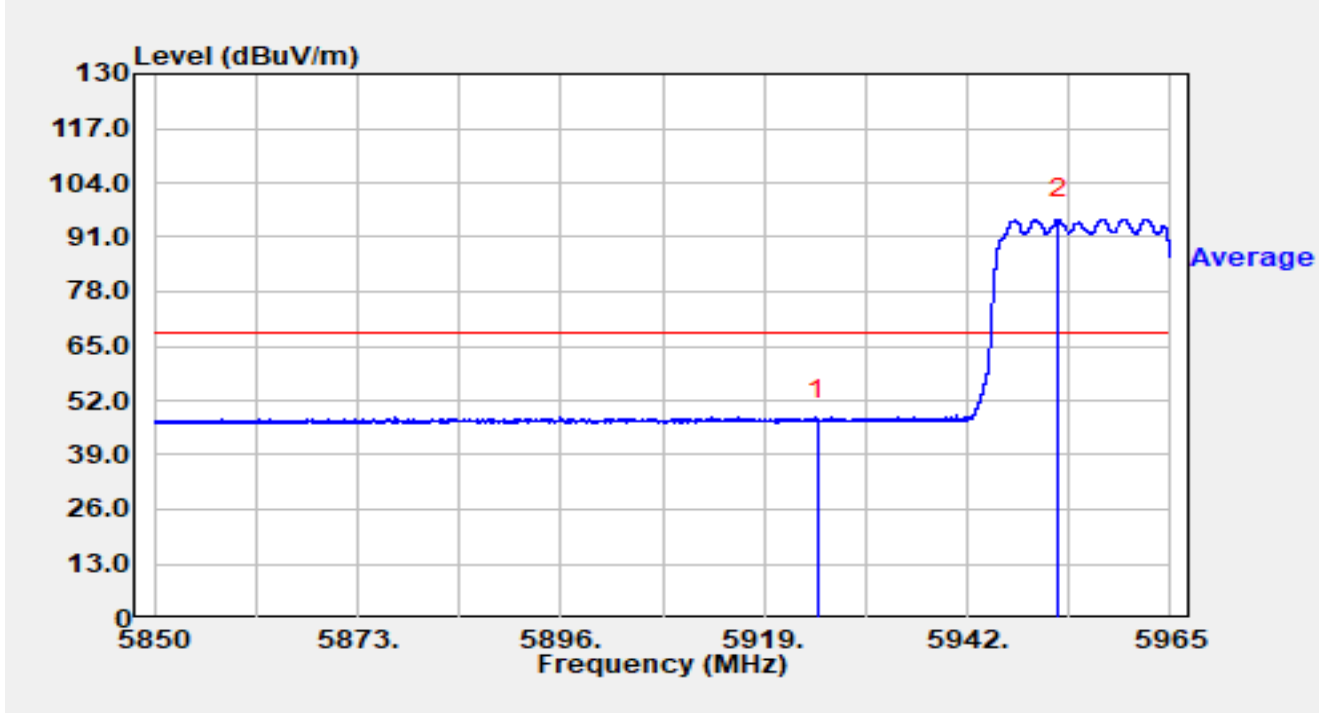


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	29.76	17.36	47.12	-21.08	68.20	Average
2	*	5952.373	77.96	17.45	95.41	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

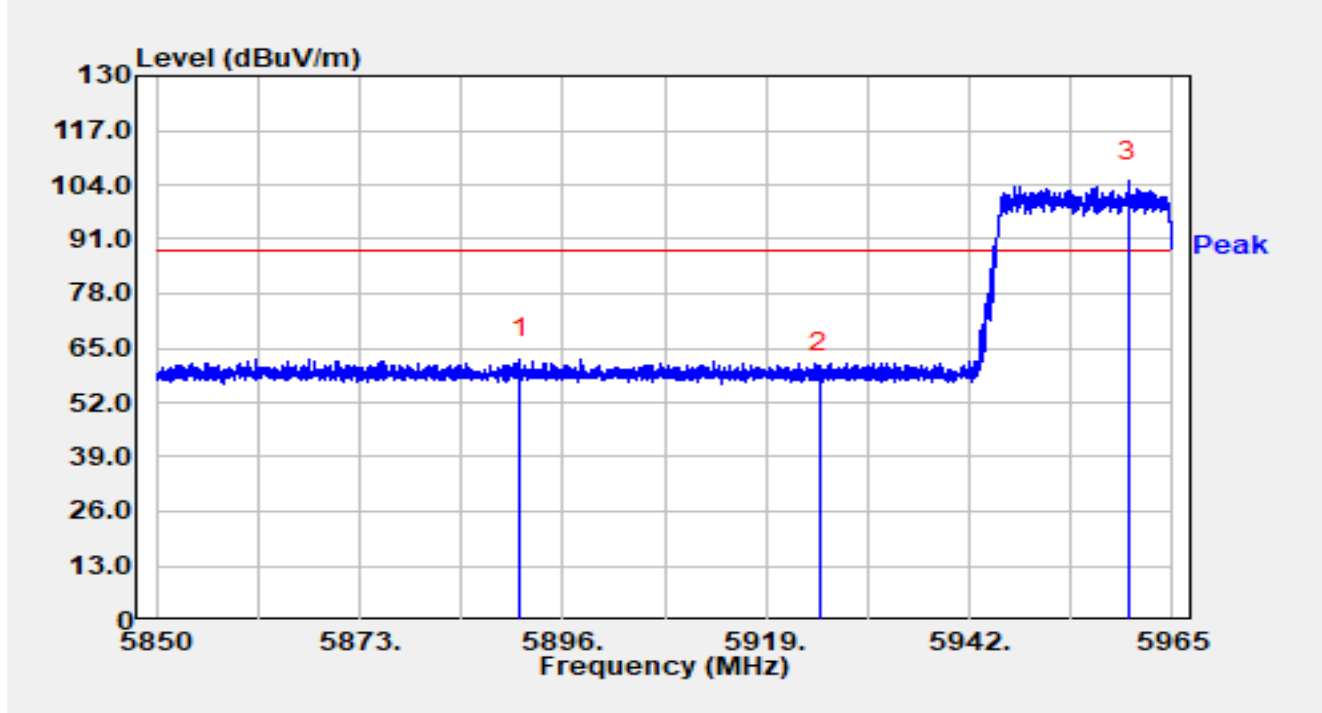


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5891.124	45.05	17.39	62.43	-25.77	88.20	Peak
2		5925.000	41.64	17.36	59.01	-29.19	88.20	Peak
3	*	5959.975	87.32	17.46	104.78	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

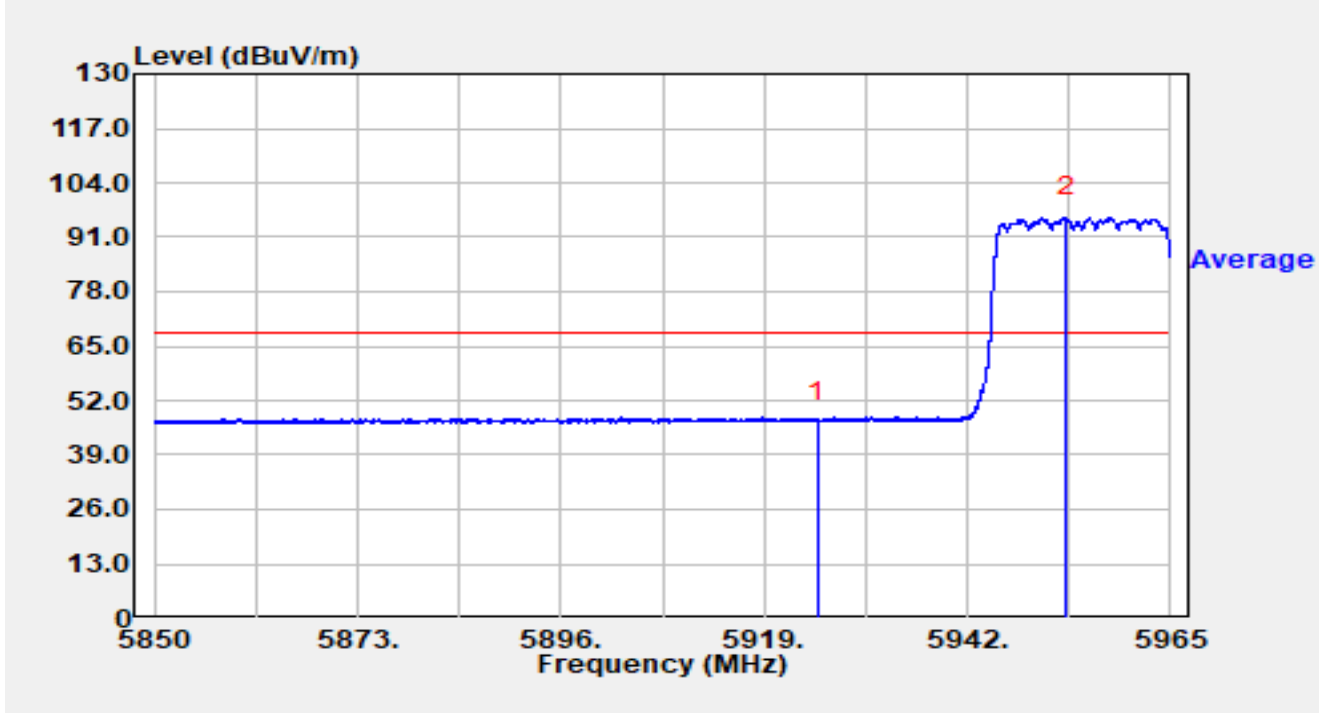


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	29.73	17.36	47.09	-21.11	68.20	Average
2	*	5953.144	78.39	17.45	95.84	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

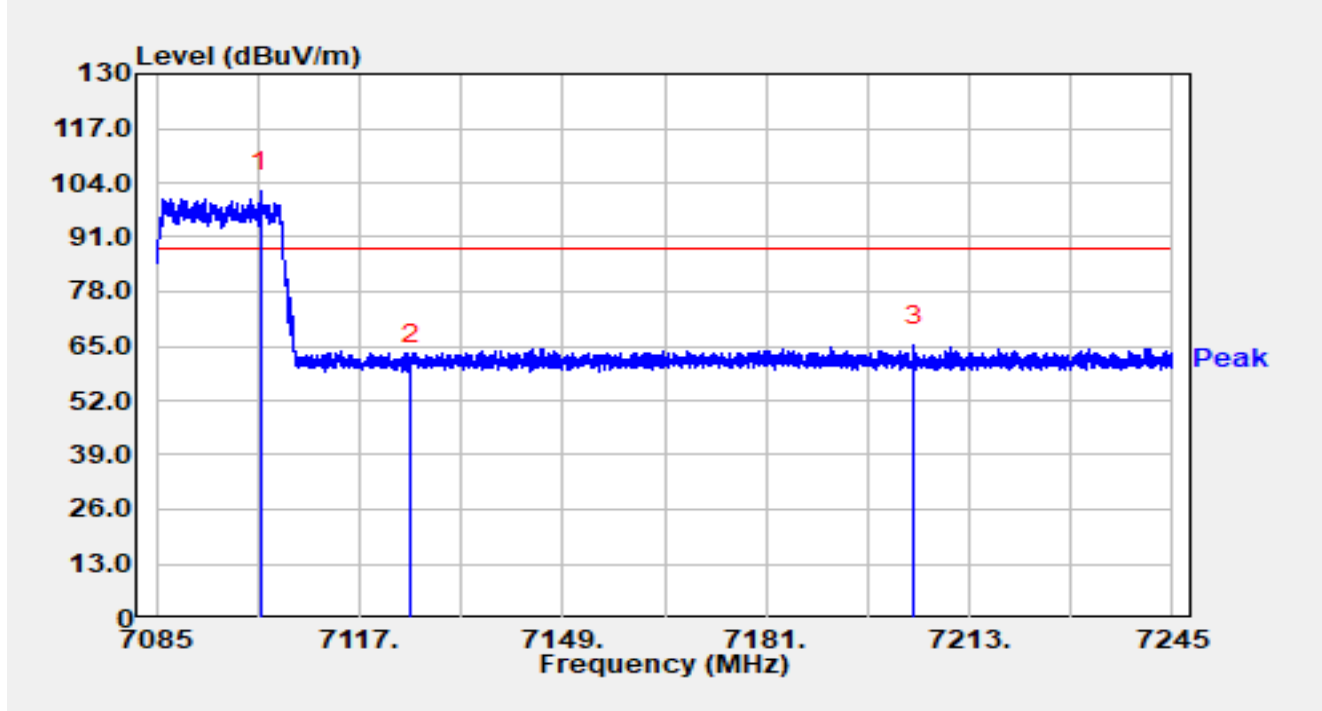


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7101.352	81.31	20.49	101.80	N/A	N/A	Peak
2		7125.000	39.96	20.42	60.39	-27.81	88.20	Peak
3		7204.216	44.41	20.63	65.04	-23.16	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

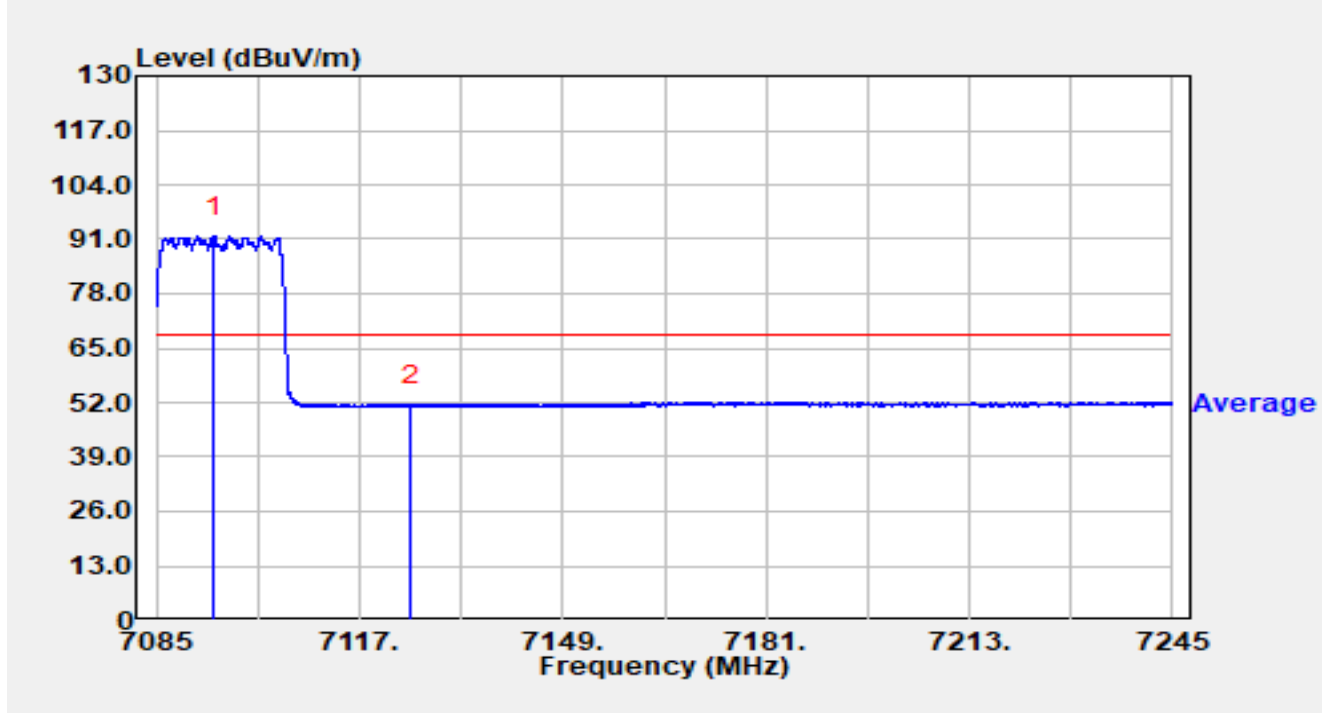


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7094.056	71.19	20.50	91.68	N/A	N/A	Average
2		7125.000	30.68	20.42	51.11	-17.09	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

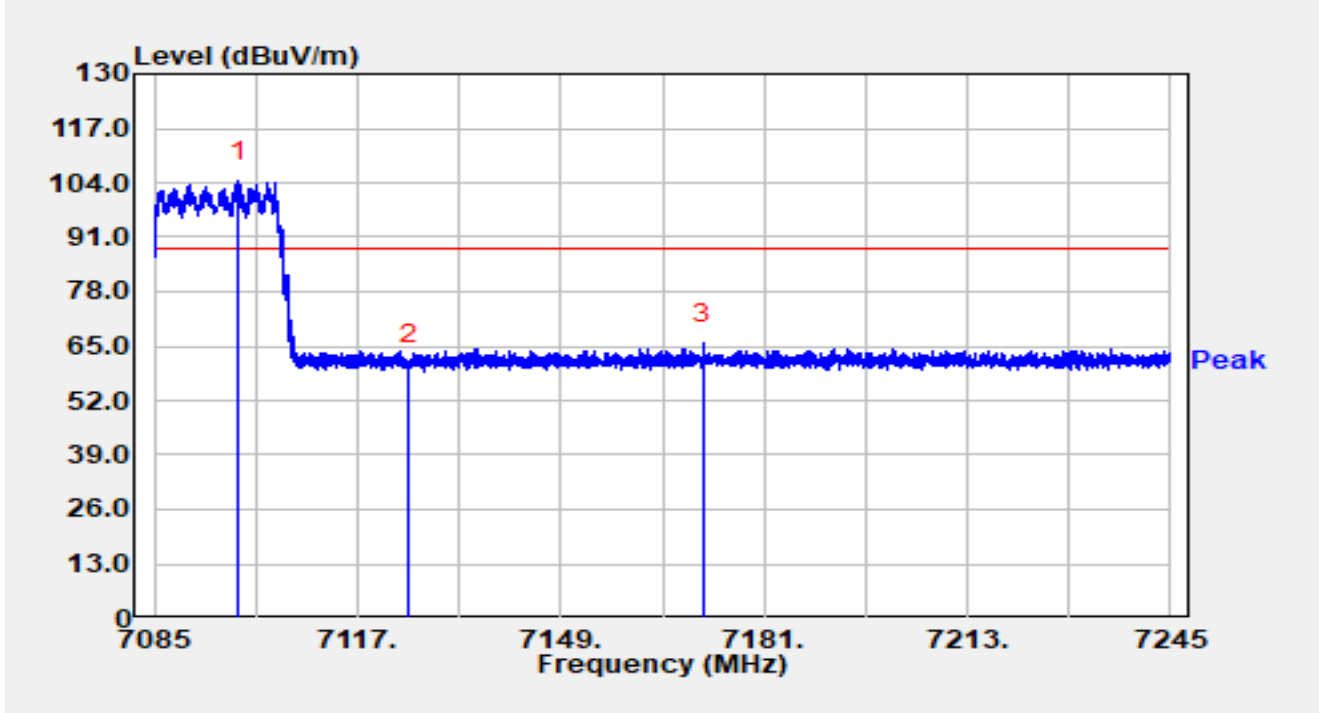


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7098.168	83.86	20.50	104.35	N/A	N/A	Peak
2		7125.000	39.93	20.42	60.35	-27.85	88.20	Peak
3		7171.384	44.97	20.75	65.72	-22.48	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

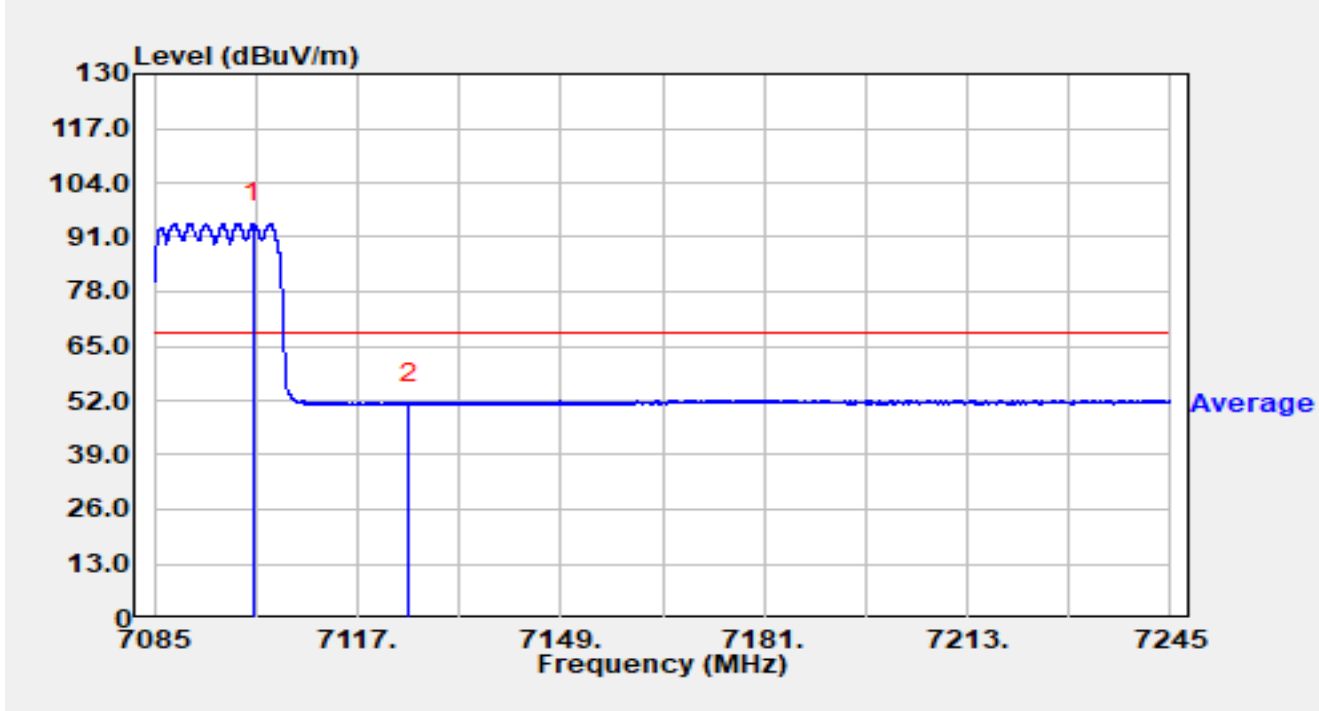


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7100.632	73.92	20.49	94.41	N/A	N/A	Average
2		7125.000	30.75	20.42	51.17	-17.03	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

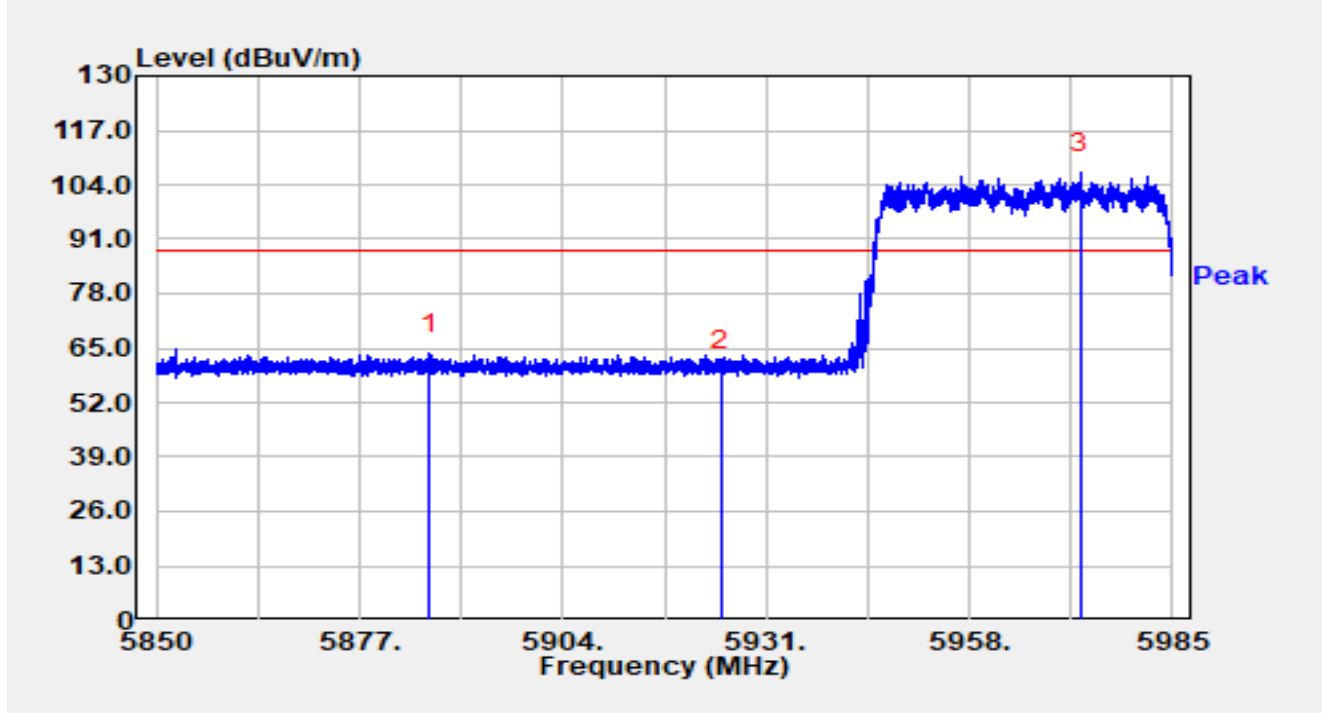


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5886.355	46.37	17.40	63.77	-24.43	88.20	Peak
2		5925.000	42.25	17.36	59.62	-28.58	88.20	Peak
3	*	5972.755	89.22	17.54	106.76	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

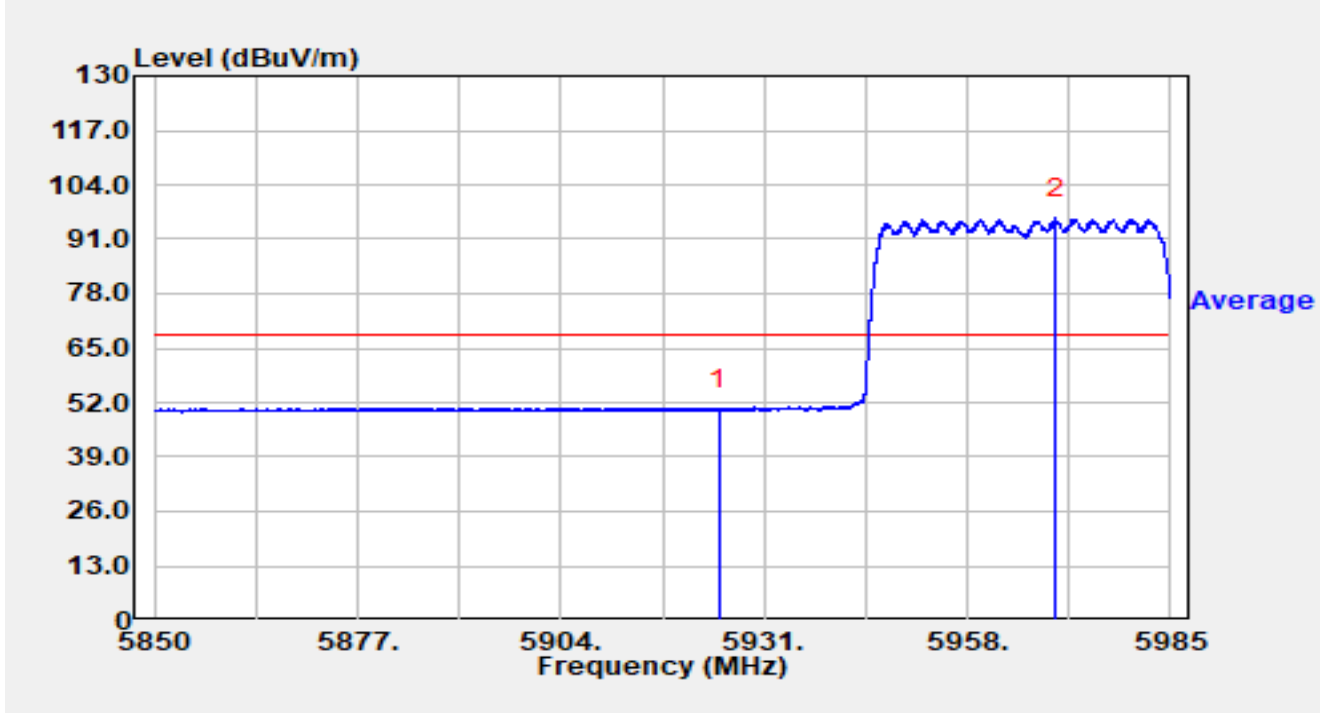


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	32.92	17.36	50.28	-17.92	68.20	Average
2	*	5969.705	78.39	17.52	95.91	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

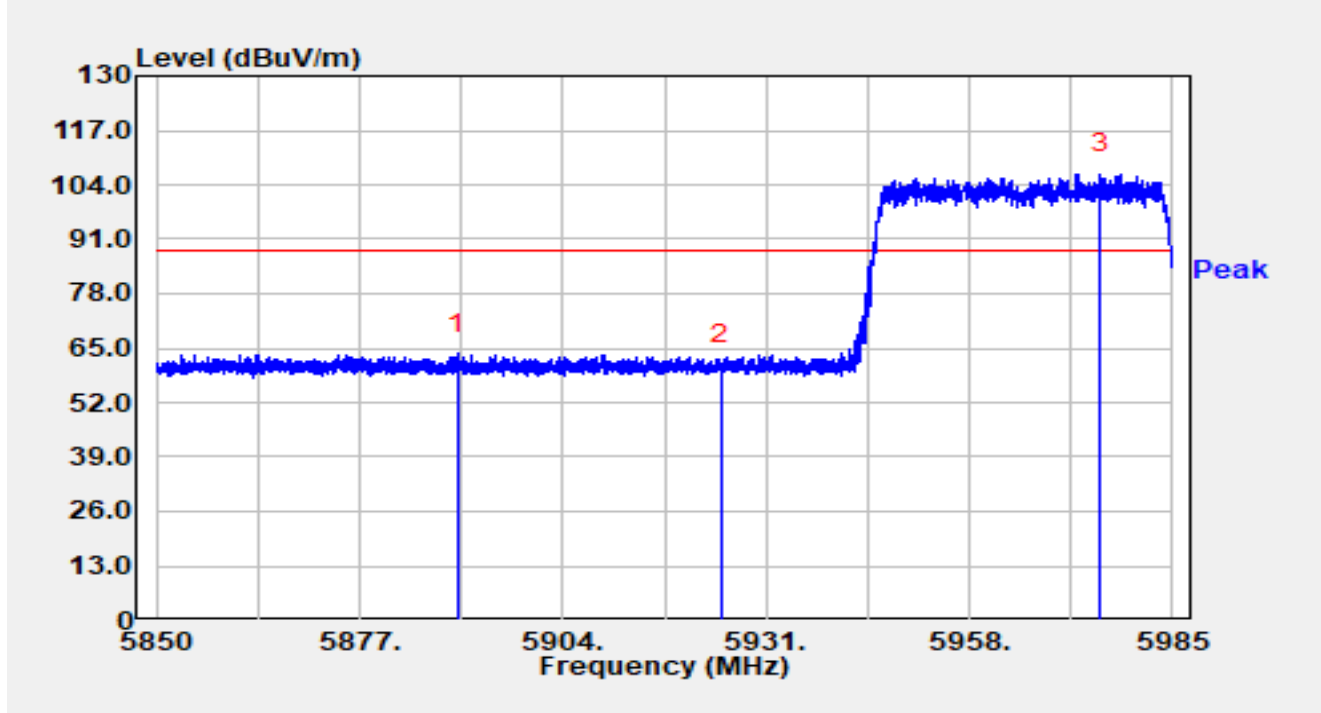


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5889.960	46.28	17.39	63.67	-24.53	88.20	Peak
2		5925.000	43.90	17.36	61.26	-26.94	88.20	Peak
3	*	5975.415	89.02	17.56	106.58	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

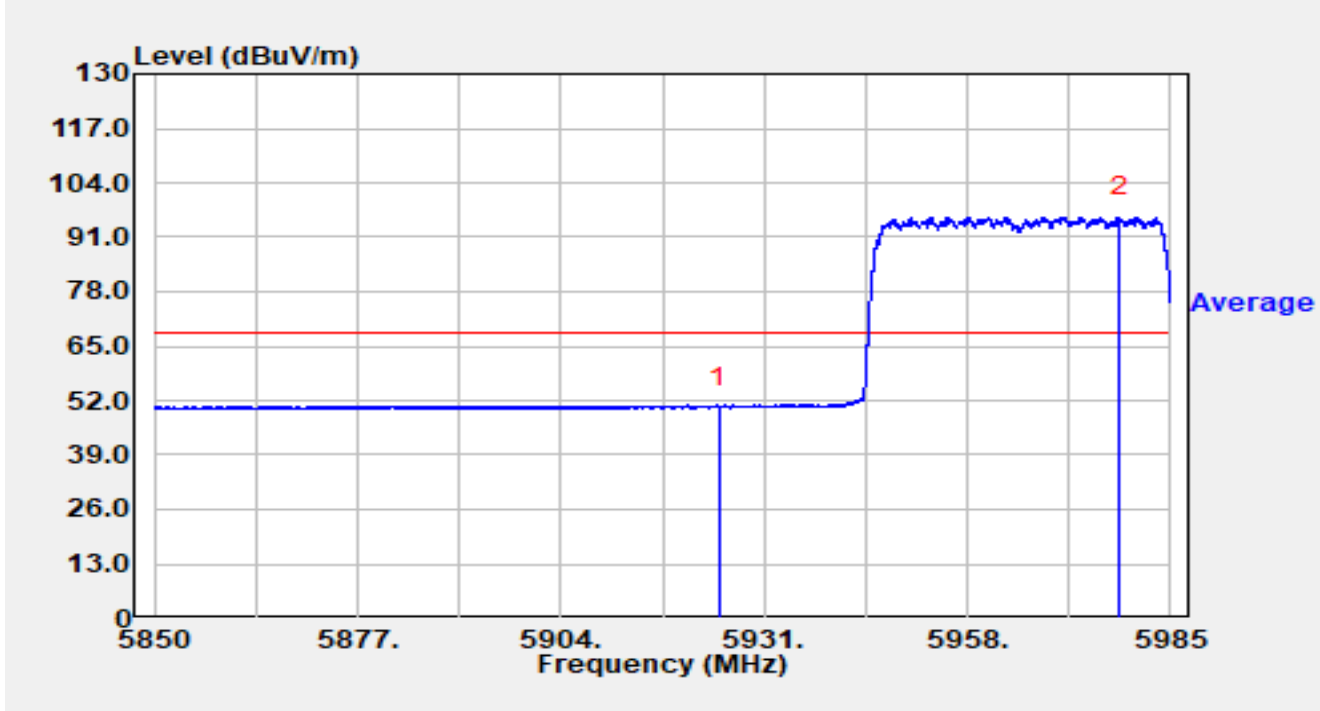


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	33.05	17.36	50.42	-17.78	68.20	Average
2	*	5978.183	78.16	17.58	95.74	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

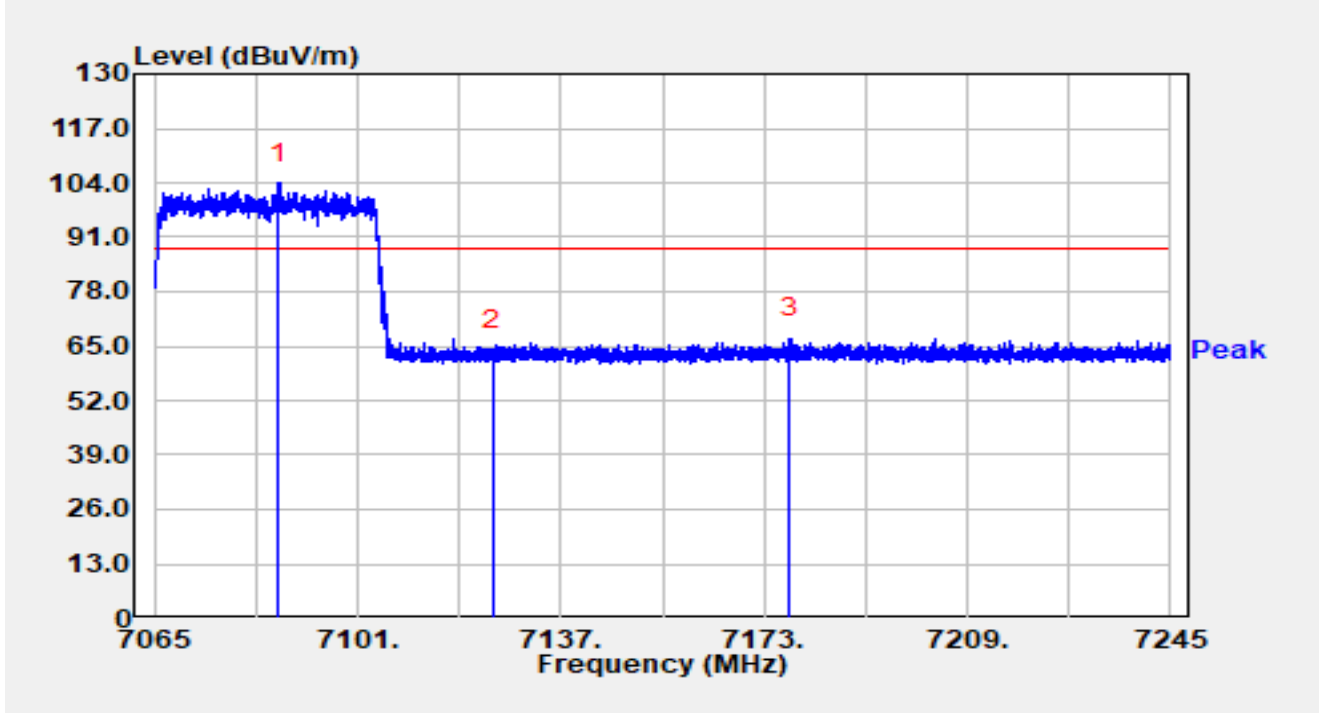


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7087.086	83.41	20.49	103.89	N/A	N/A	Peak
2		7125.000	43.52	20.42	63.95	-24.25	88.20	Peak
3		7177.626	46.13	20.72	66.86	-21.34	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

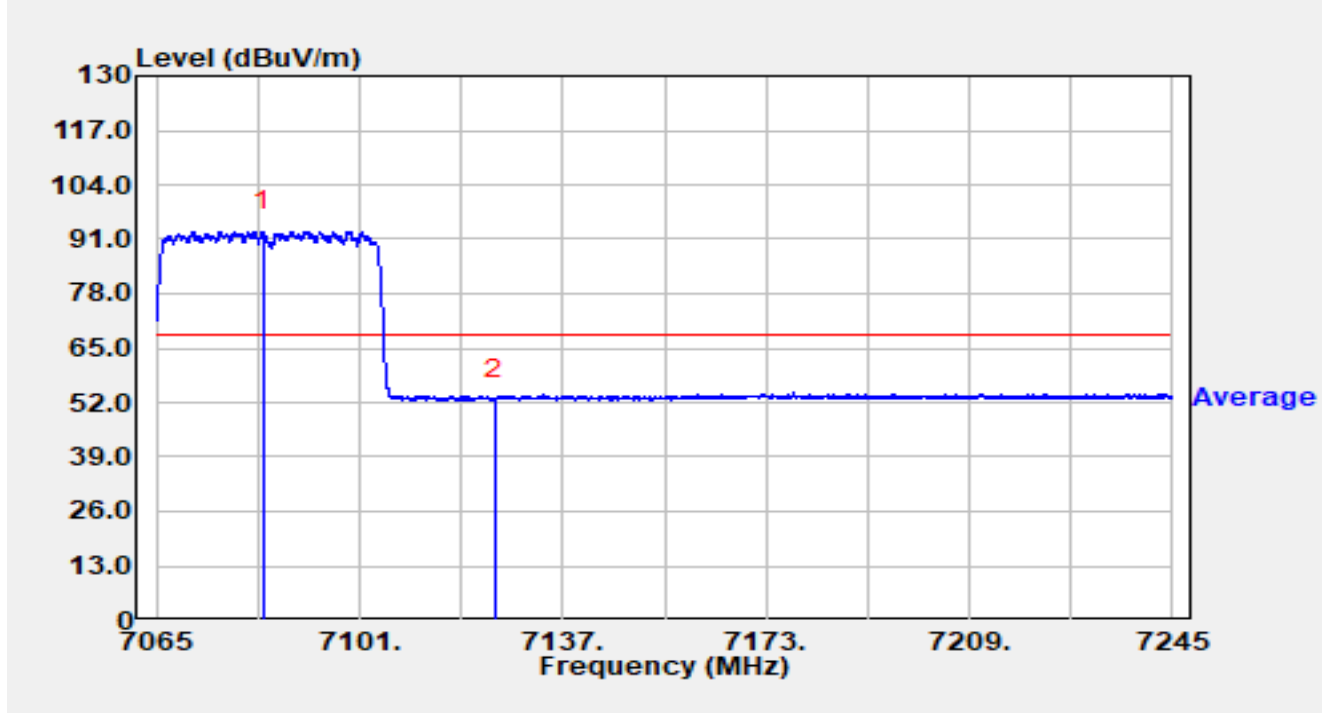


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7083.864	72.47	20.47	92.94	N/A	N/A	Average
2		7125.000	32.55	20.42	52.97	-15.23	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

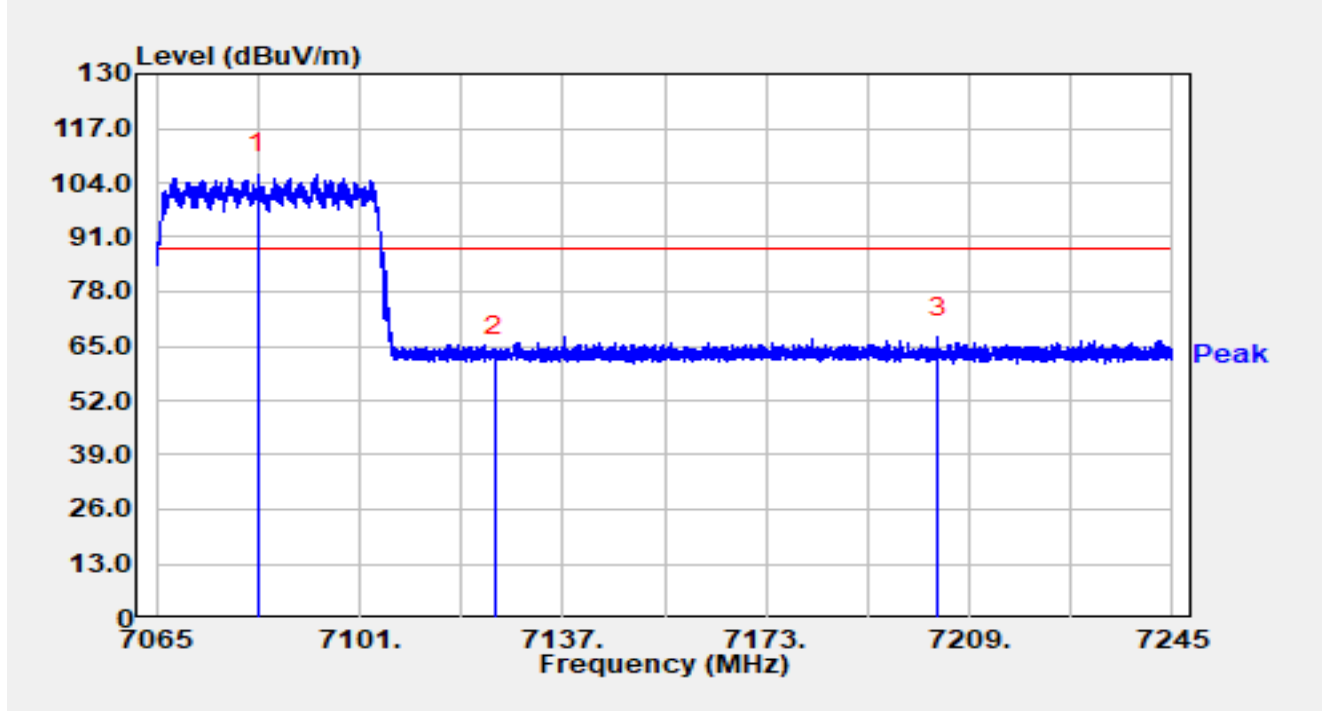


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7083.036	85.64	20.46	106.10	N/A	N/A	Peak
2		7125.000	42.27	20.42	62.70	-25.50	88.20	Peak
3		7203.420	46.55	20.63	67.18	-21.02	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

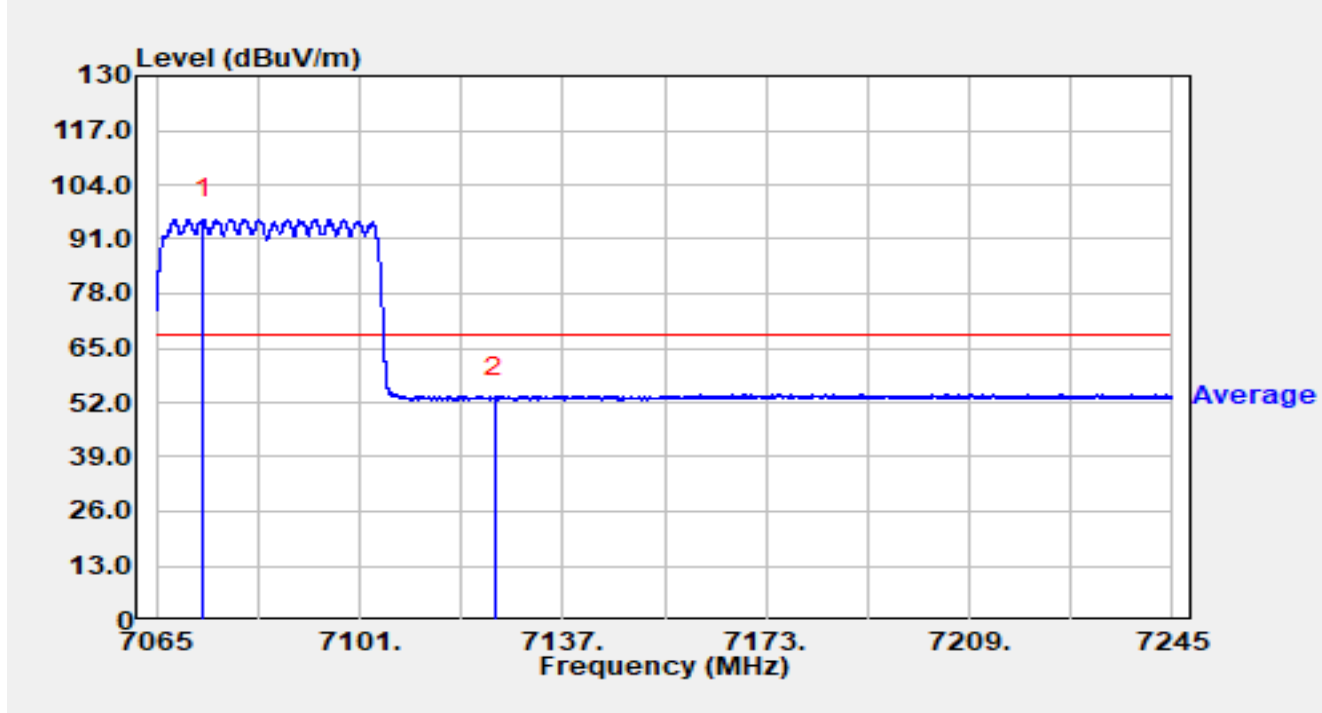


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7073.334	75.52	20.37	95.89	N/A	N/A	Average
2		7125.000	32.91	20.42	53.34	-14.86	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

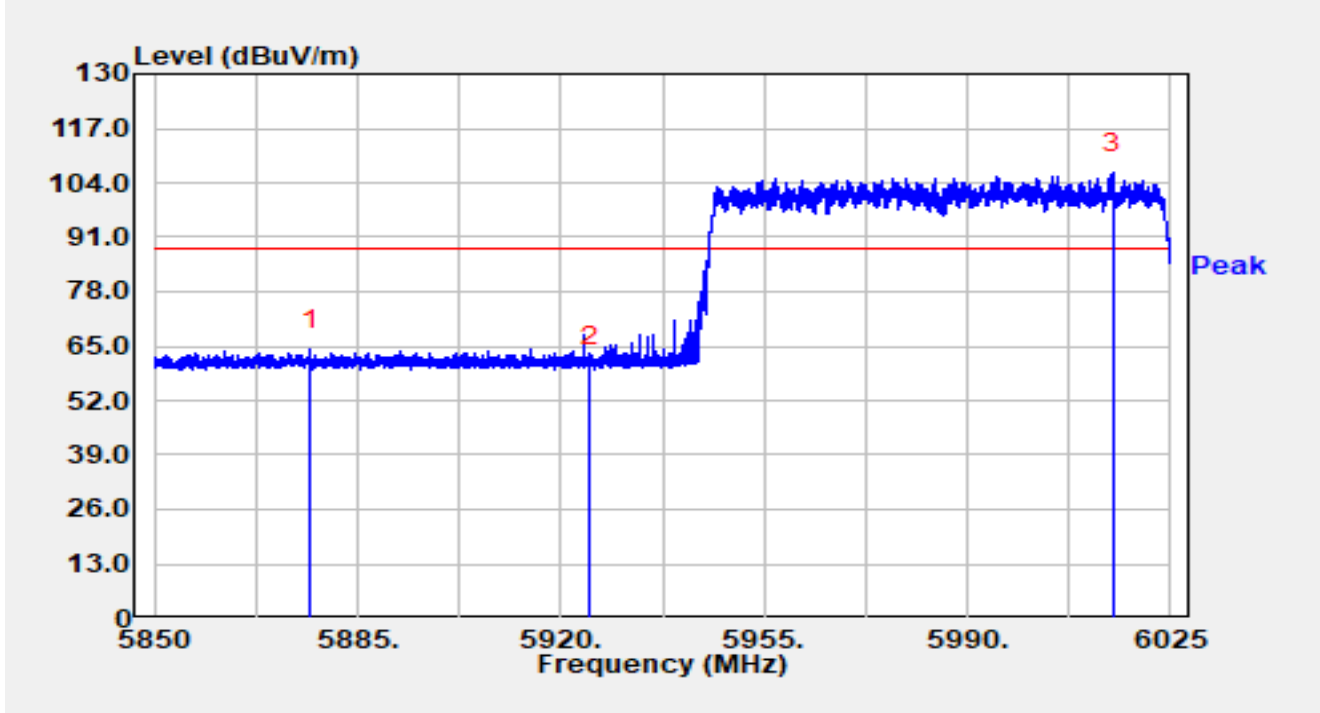


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5876.915	46.65	17.39	64.04	-24.16	88.20	Peak
2		5925.000	42.94	17.36	60.31	-27.89	88.20	Peak
3	*	6014.990	88.63	17.61	106.24	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

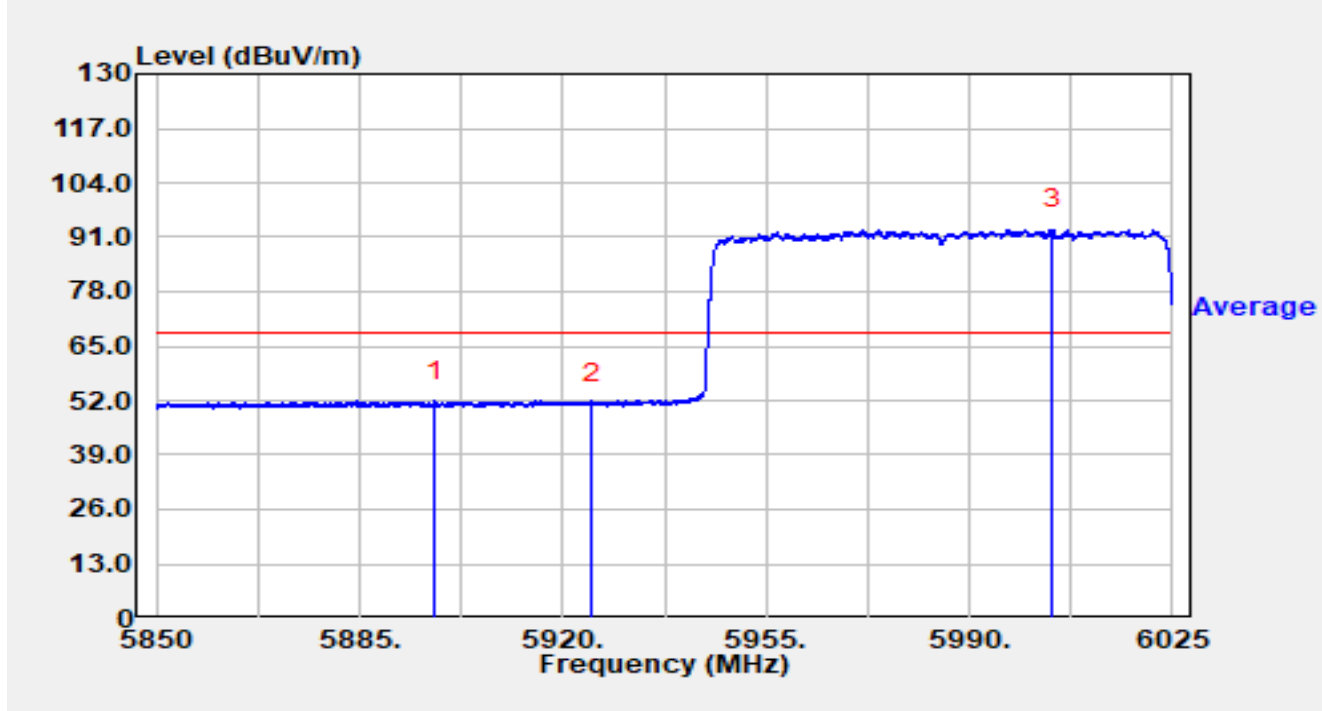


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5898.002	34.45	17.37	51.82	-16.38	68.20	Average
2		5925.000	34.02	17.36	51.39	-16.81	68.20	Average
3	*	6004.245	75.35	17.43	92.78	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

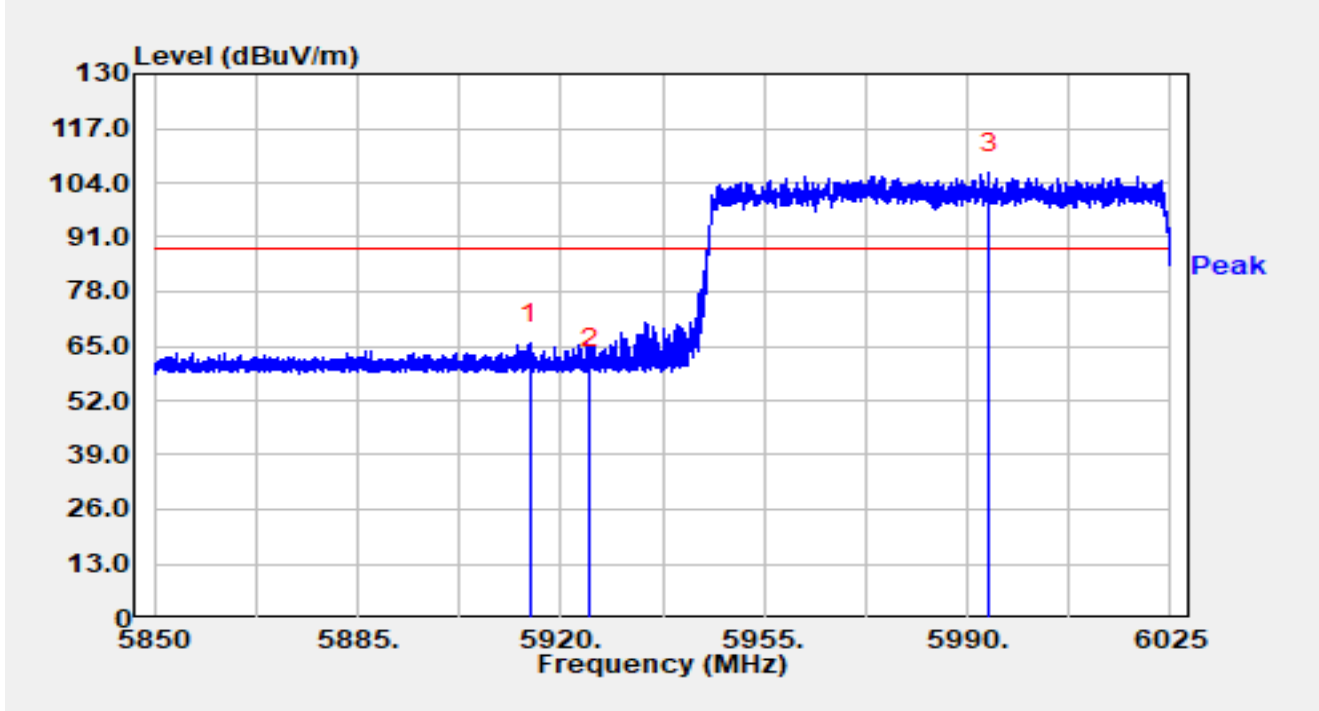


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5914.592	48.39	17.35	65.73	-22.47	88.20	Peak
2		5925.000	42.19	17.36	59.55	-28.65	88.20	Peak
3	*	5993.797	89.02	17.39	106.42	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

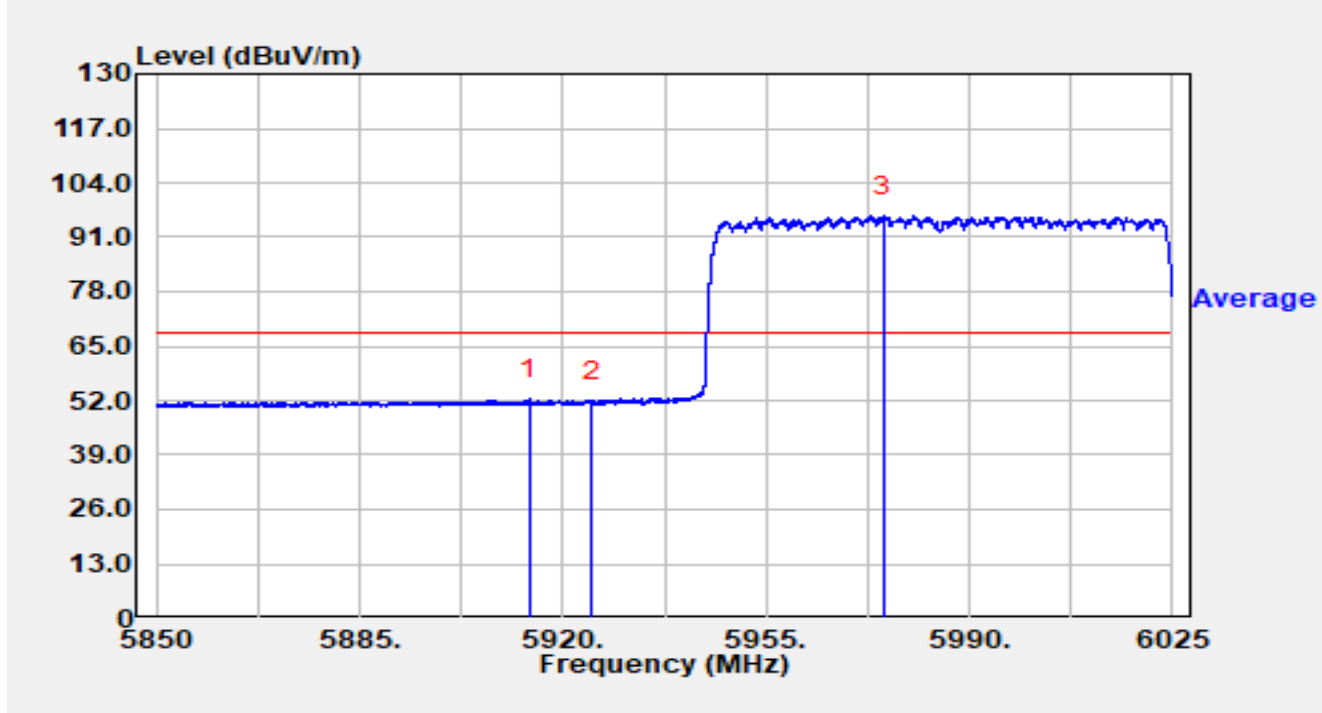


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5914.172	34.91	17.35	52.25	-15.95	68.20	Average
2		5925.000	34.16	17.36	51.53	-16.67	68.20	Average
3	*	5975.178	78.55	17.56	96.11	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

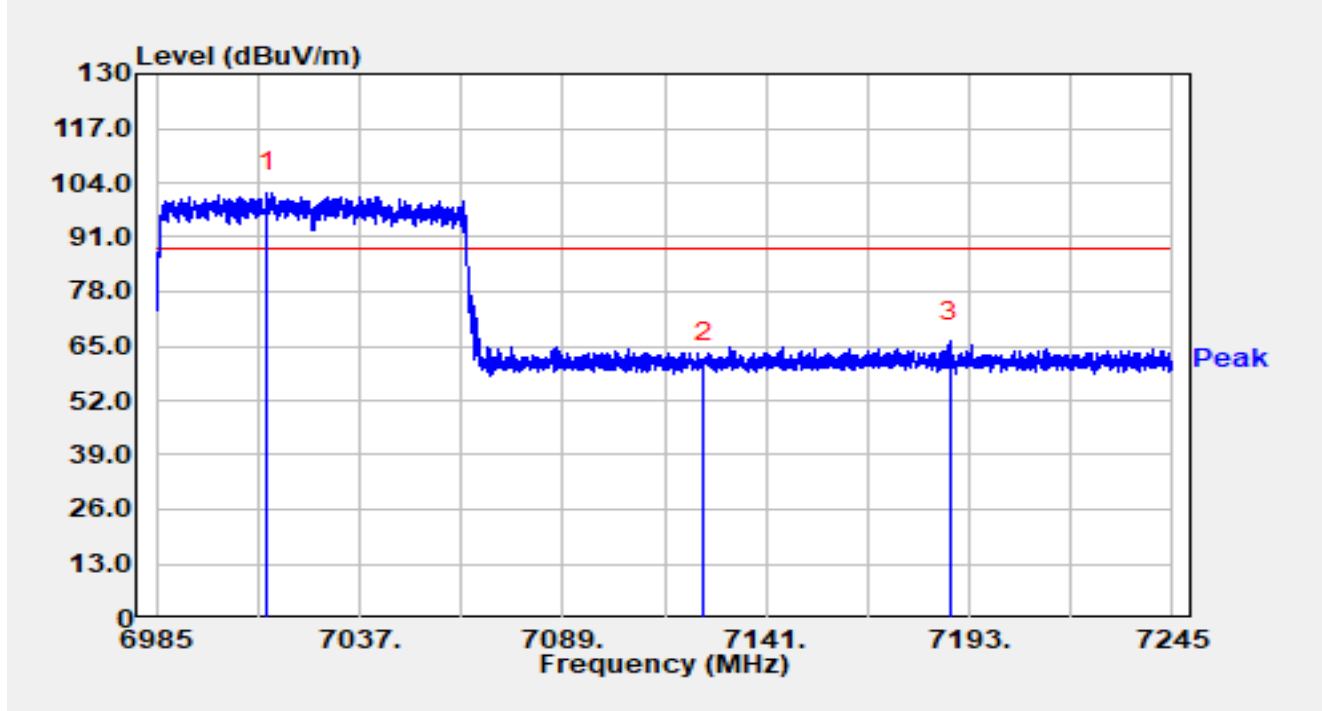


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7013.184	81.23	20.36	101.59	N/A	N/A	Peak
2		7125.000	40.45	20.42	60.87	-27.33	88.20	Peak
3		7187.930	45.32	20.68	66.00	-22.20	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

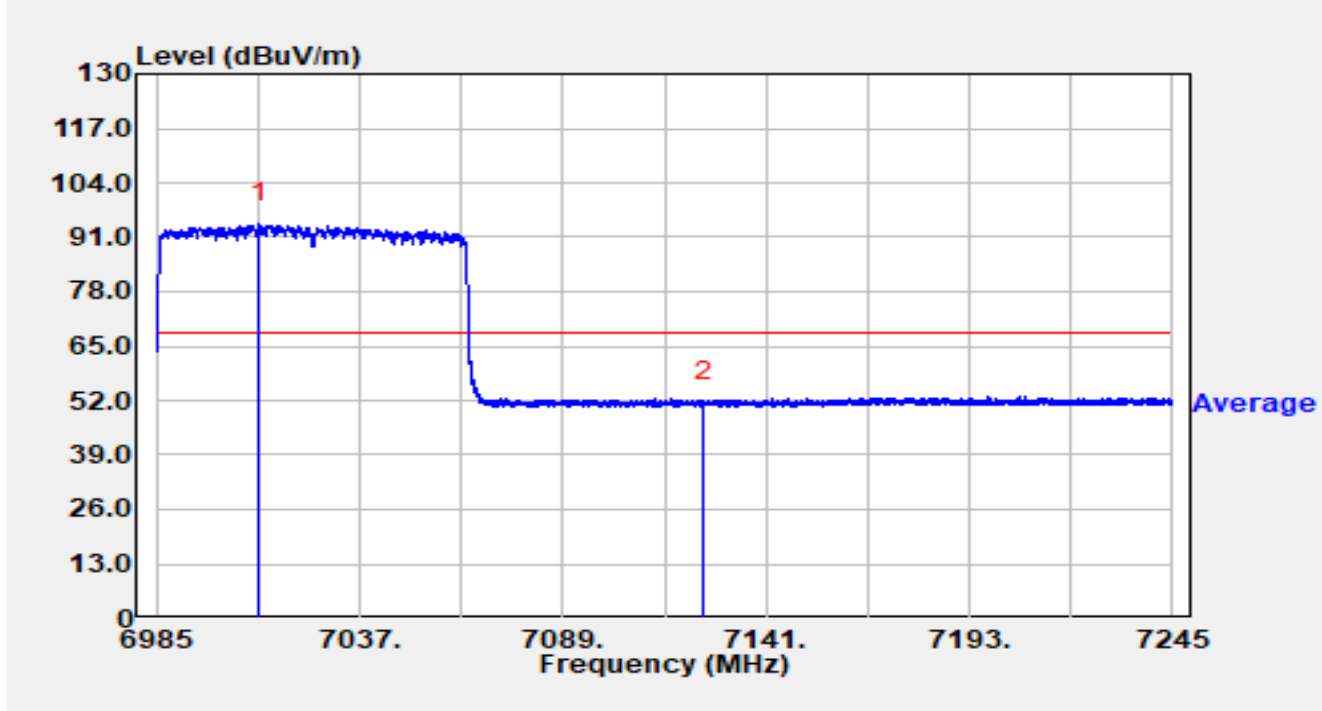


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7011.182	73.86	20.34	94.20	N/A	N/A	Average
2		7125.000	31.13	20.42	51.55	-16.65	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

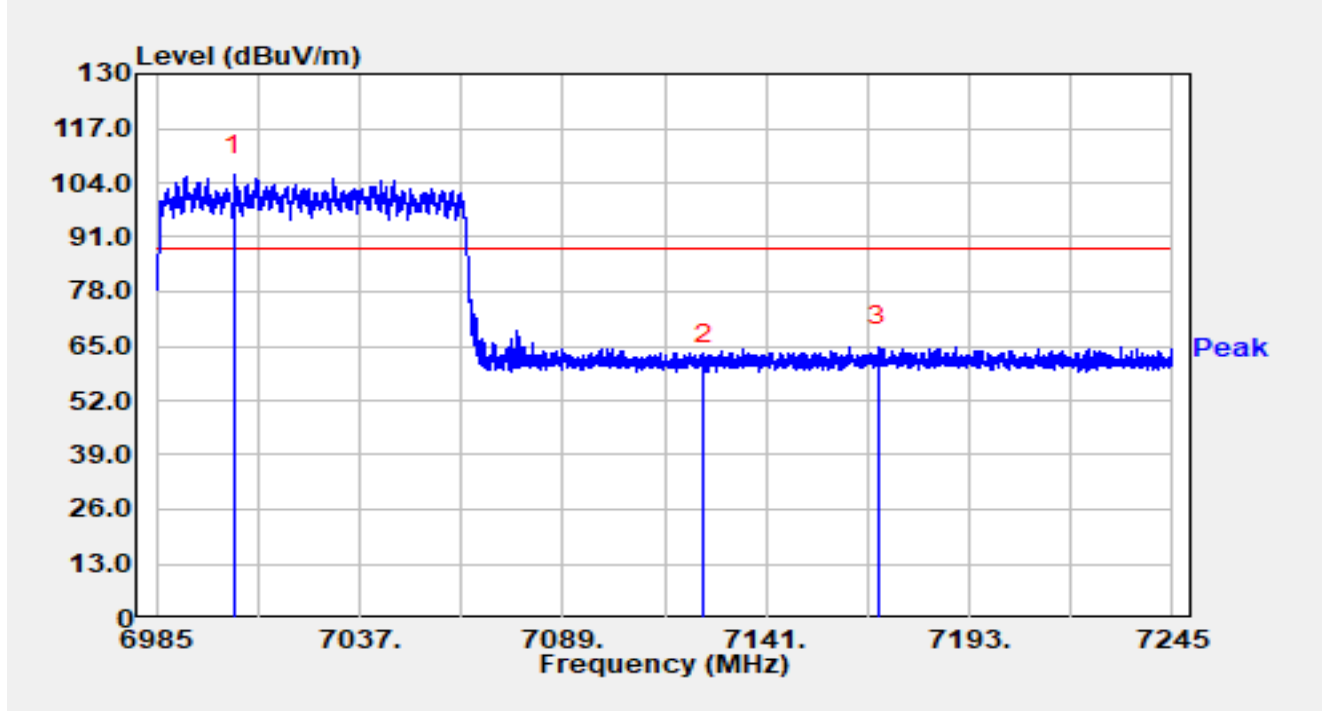


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7004.942	85.59	20.29	105.88	N/A	N/A	Peak
2		7125.000	40.23	20.42	60.65	-27.55	88.20	Peak
3		7169.730	44.10	20.73	64.82	-23.38	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

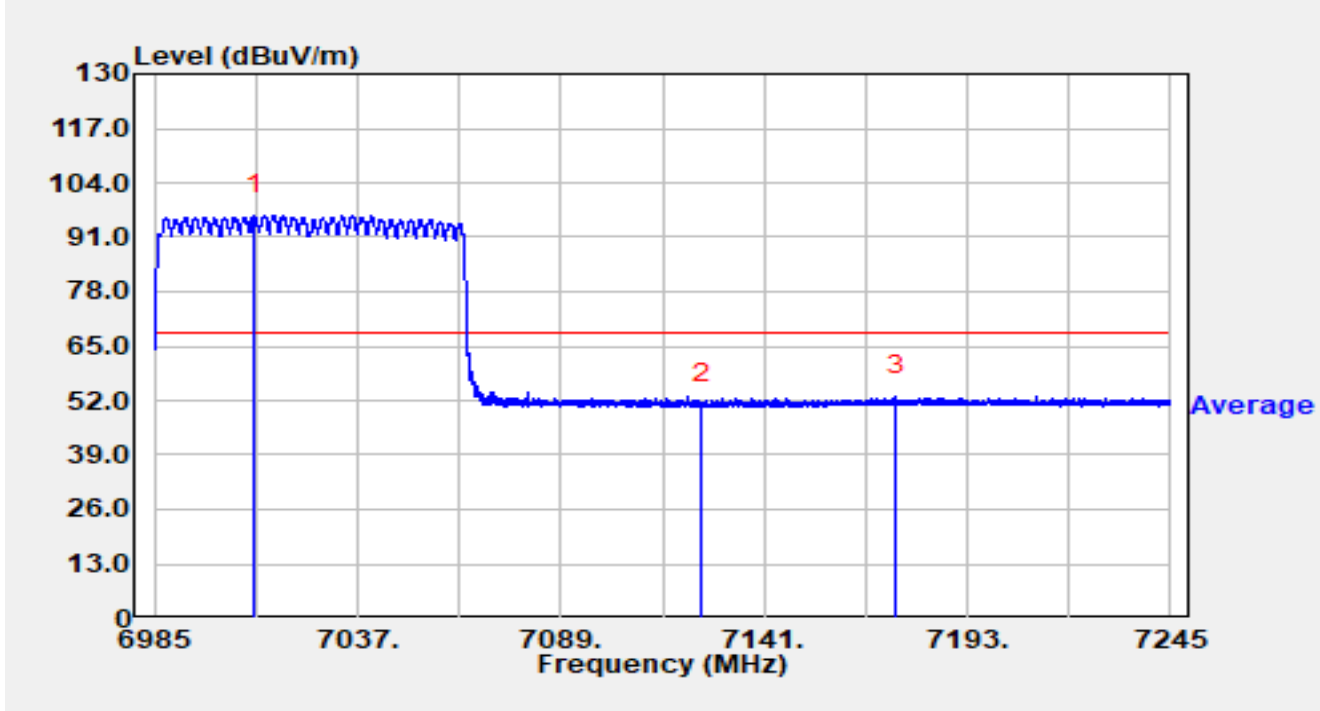


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7010.532	76.03	20.34	96.37	N/A	N/A	Average
2		7125.000	30.84	20.42	51.26	-16.94	68.20	Average
3		7174.670	32.40	20.73	53.14	-15.06	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

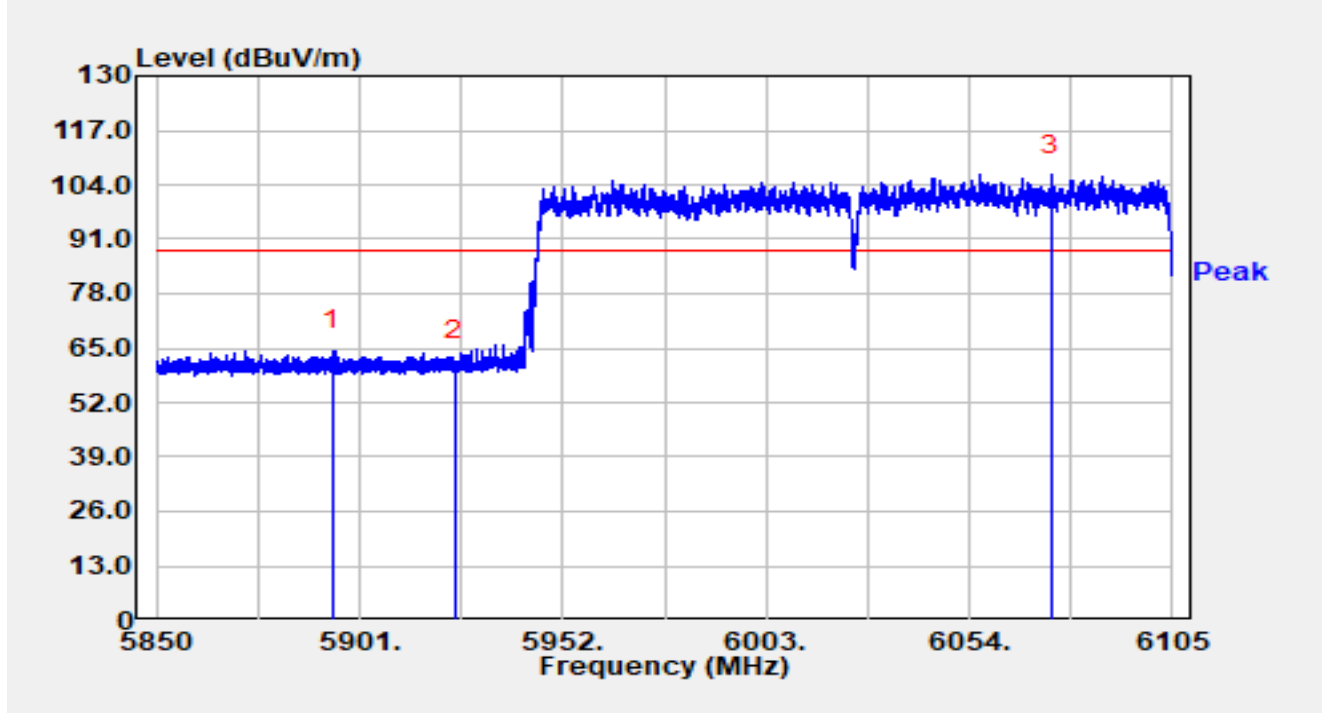


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5894.268	47.04	17.38	64.42	-23.78	88.20	Peak
2		5925.000	44.57	17.36	61.94	-26.26	88.20	Peak
3	*	6074.604	88.29	18.13	106.41	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

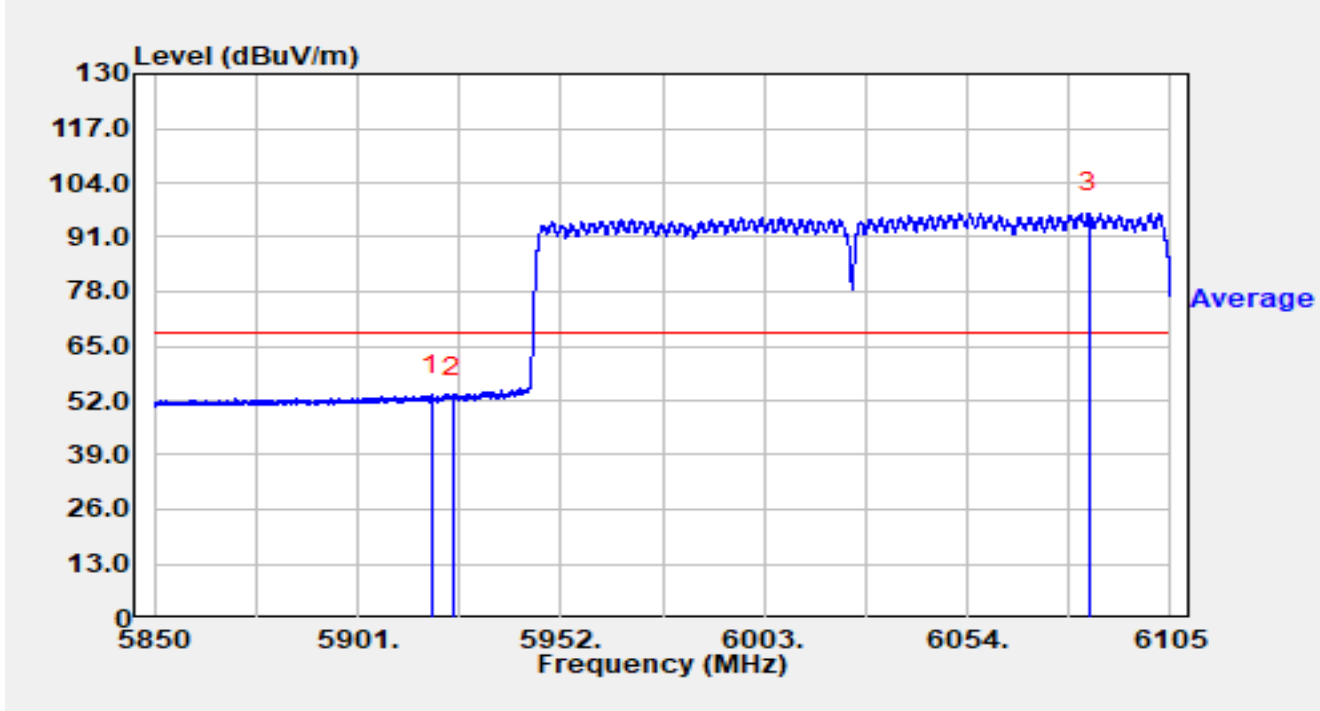


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5919.615	36.00	17.35	53.35	-14.85	68.20	Average
2		5925.000	35.51	17.36	52.88	-15.32	68.20	Average
3	*	6084.447	78.62	18.10	96.71	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

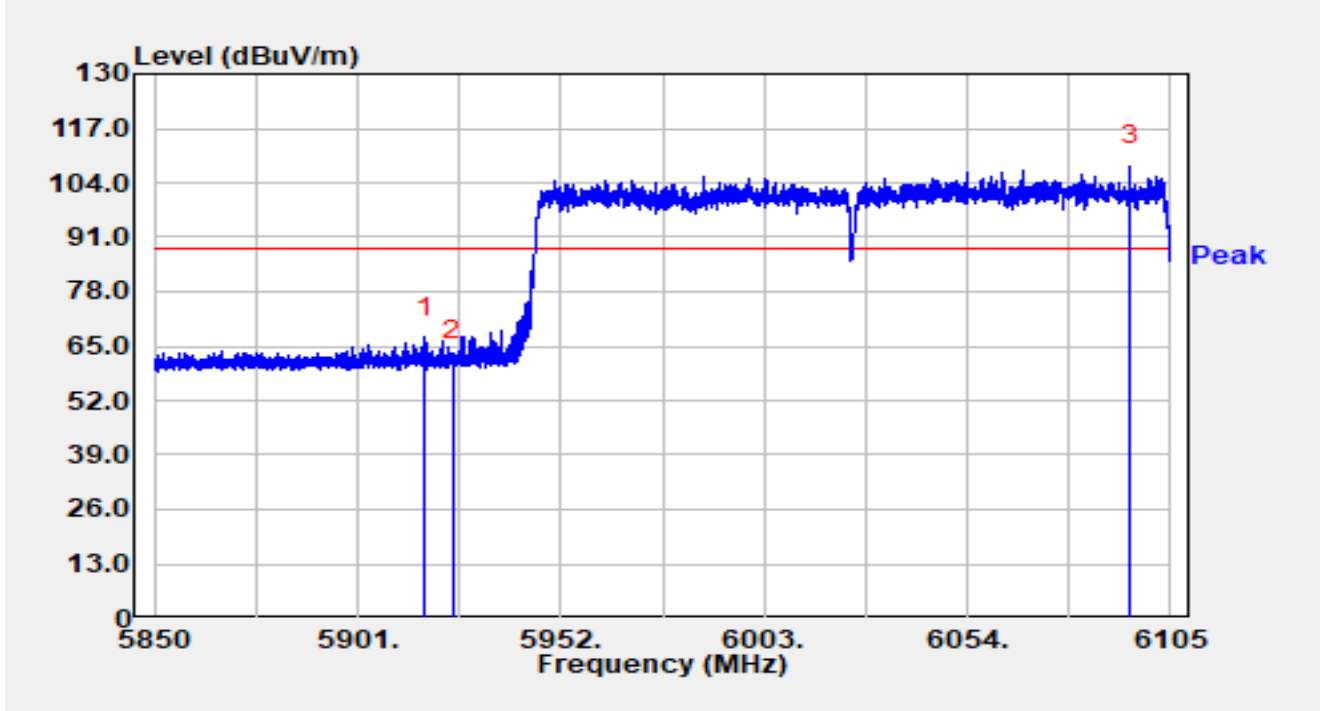


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5917.958	49.62	17.35	66.97	-21.23	88.20	Peak
2		5925.000	43.98	17.36	61.34	-26.86	88.20	Peak
3	*	6094.826	89.97	18.00	107.97	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

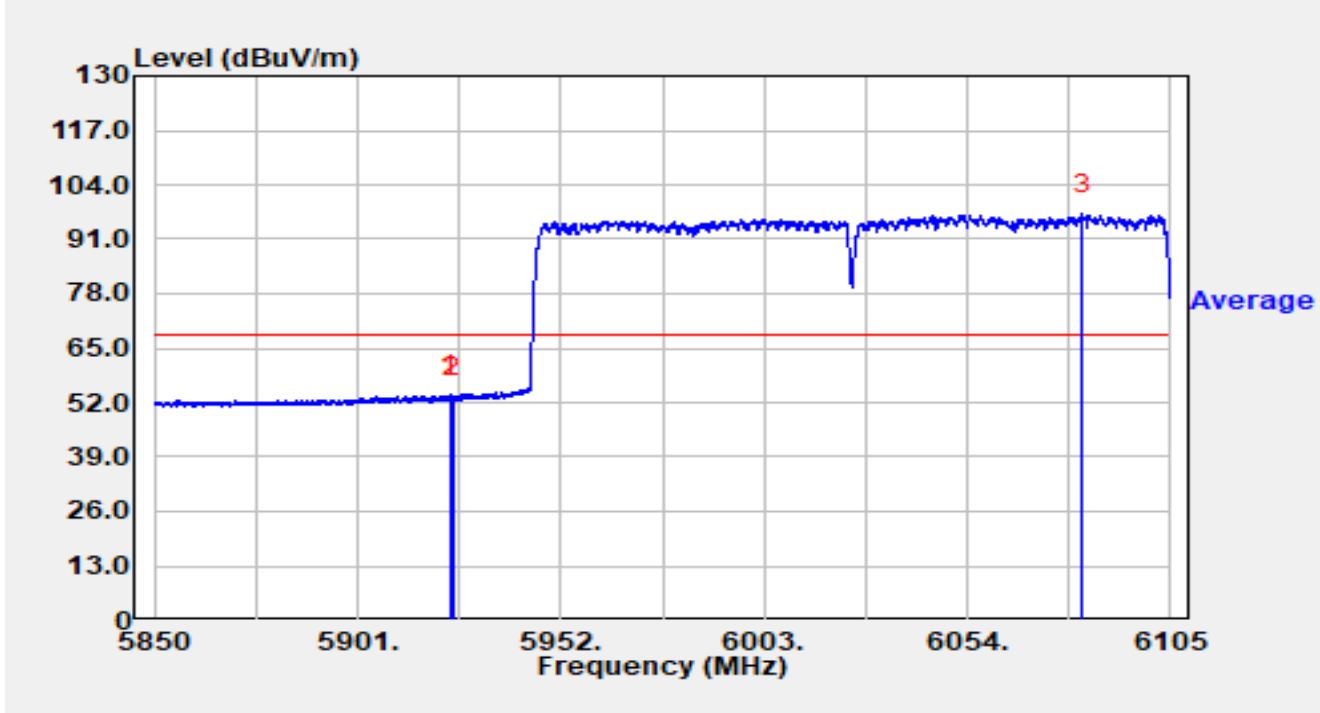


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5924.230	36.38	17.36	53.74	-14.46	68.20	Average
2		5925.000	35.88	17.36	53.24	-14.96	68.20	Average
3	*	6082.866	79.00	18.11	97.11	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

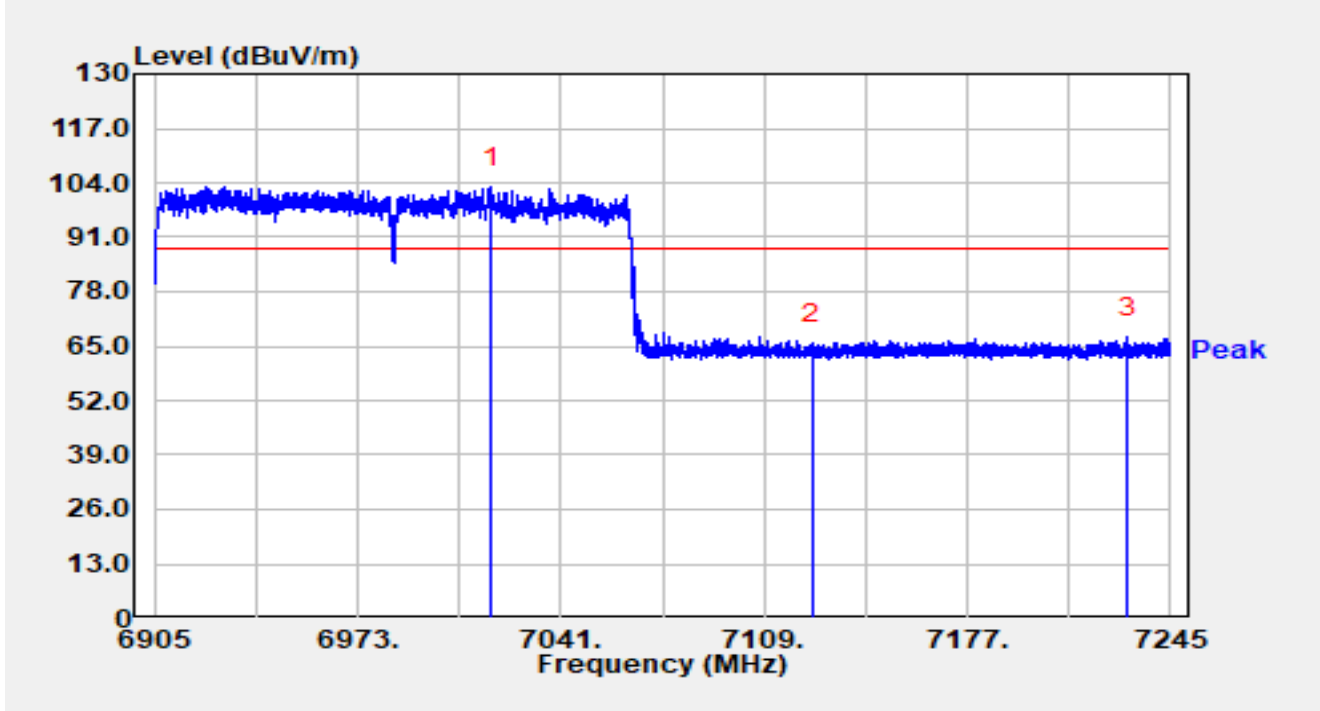


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7017.778	82.55	20.40	102.95	N/A	N/A	Peak
2		7125.000	44.89	20.42	65.31	-22.89	88.20	Peak
3		7230.584	46.41	20.62	67.03	-21.17	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

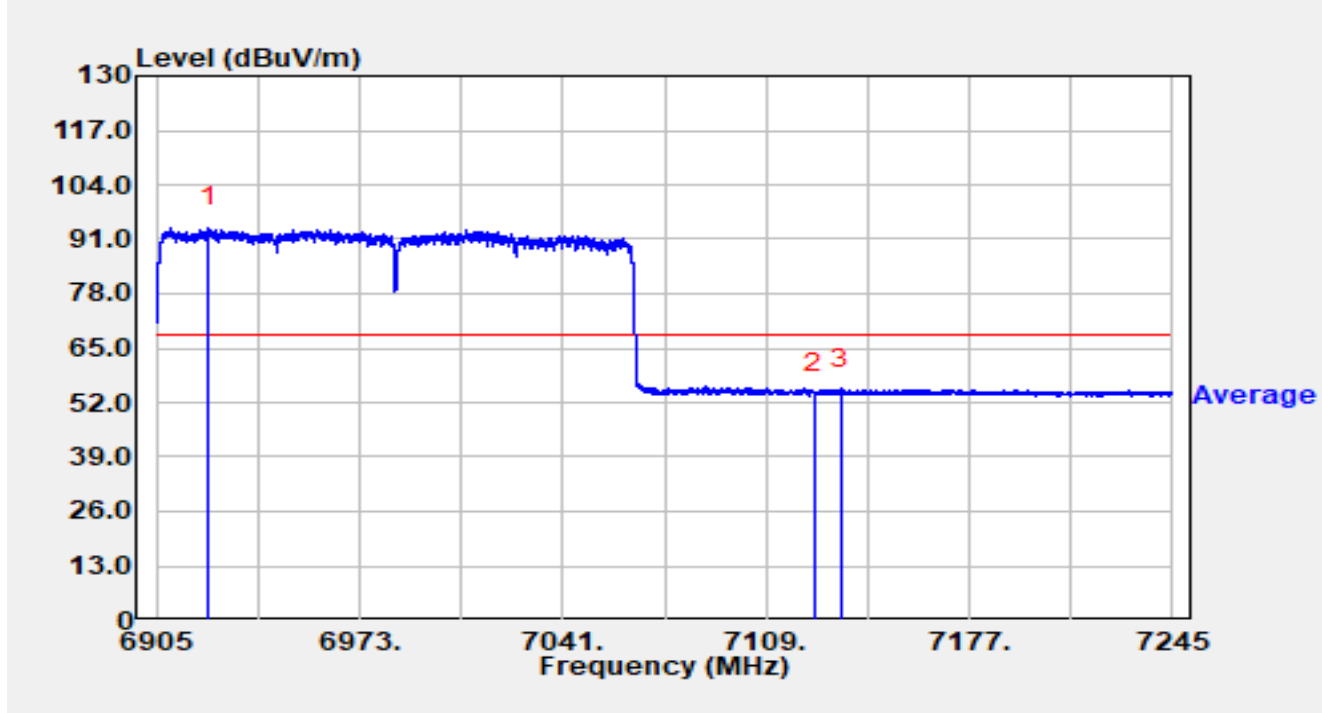


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	6922.272	73.40	20.37	93.77	N/A	N/A	Average
2		7125.000	33.85	20.42	54.27	-13.93	68.20	Average
3		7133.854	34.80	20.43	55.24	-12.96	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

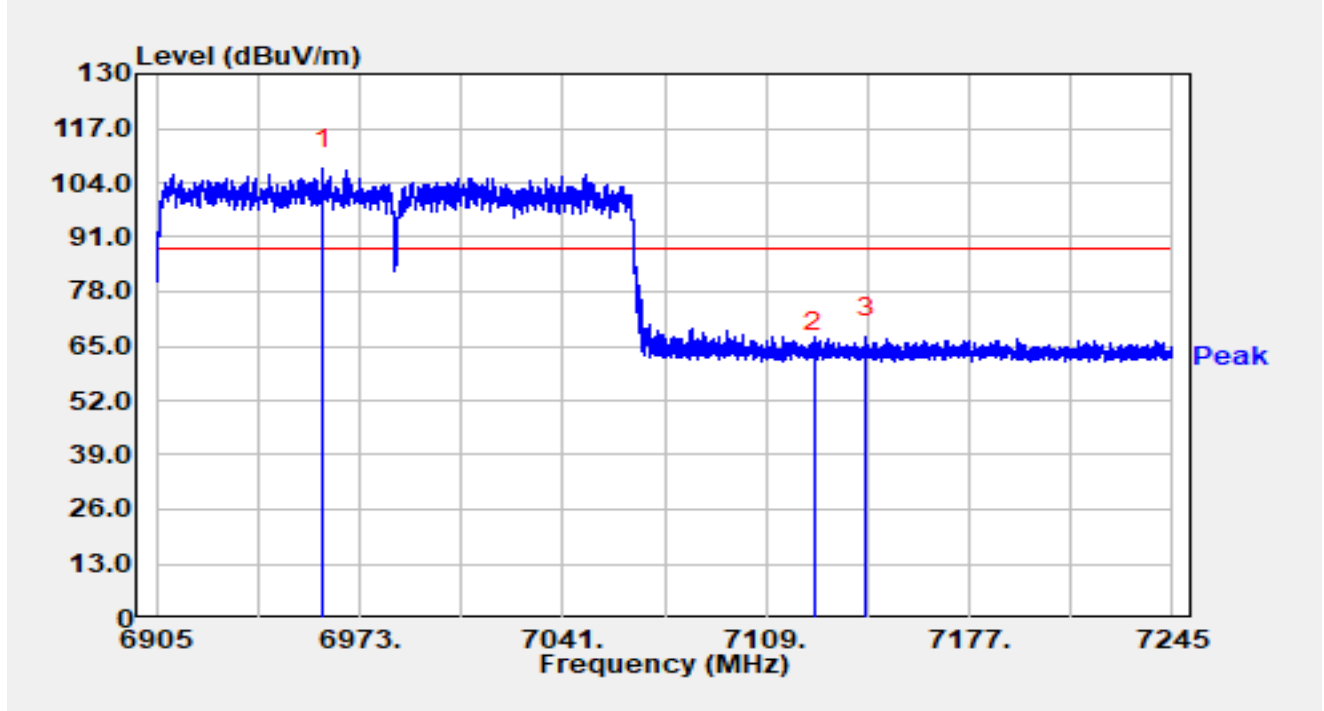


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	6960.658	87.13	20.18	107.31	N/A	N/A	Peak
2		7125.000	43.30	20.42	63.72	-24.48	88.20	Peak
3		7142.558	46.80	20.39	67.19	-21.01	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-12
Temperature	14.7°C	Humidity	25.4%
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

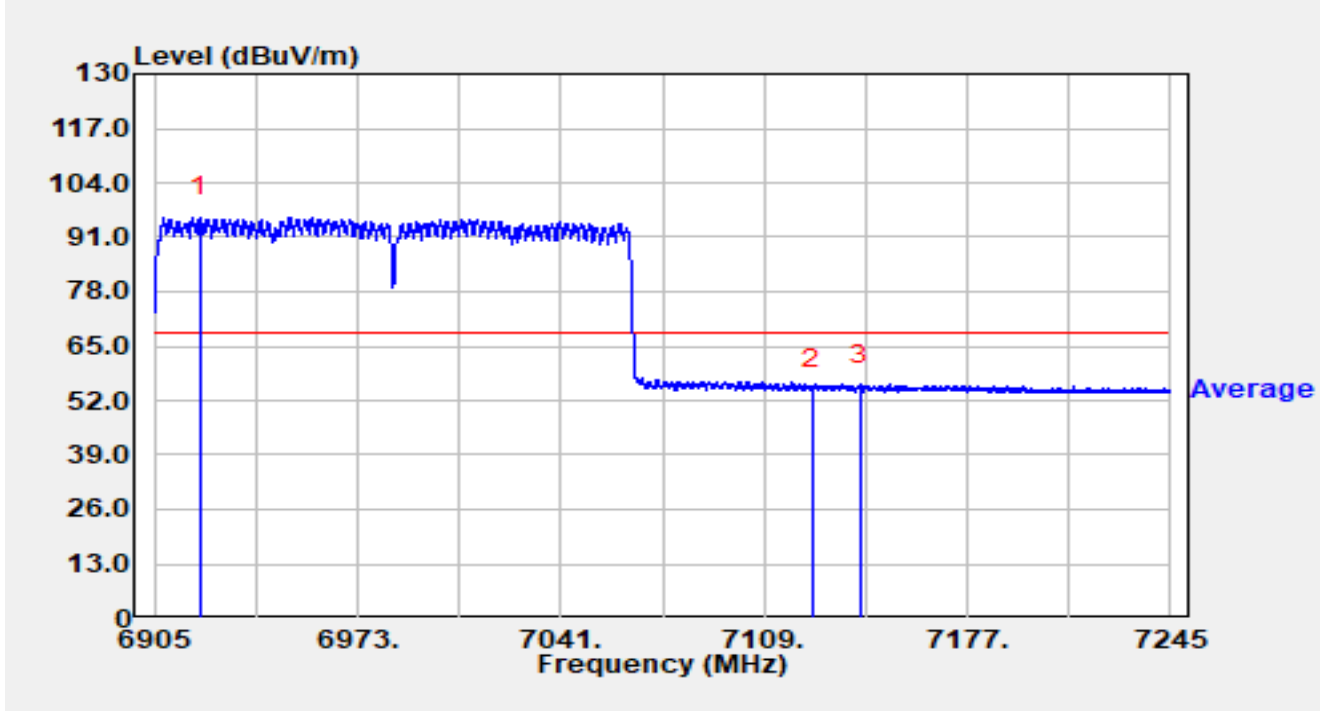


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	6920.062	75.41	20.36	95.76	N/A	N/A	Average
2		7125.000	34.44	20.42	54.87	-13.33	68.20	Average
3		7141.266	35.48	20.40	55.88	-12.32	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

A.10 AC Conducted Emissions Test Result

Site	WJ-SR5	Test Date	2025-02-18
Temperature	15.3 °C	Humidity	40.4 %
Limit	FCC Part 15.207_CE	Test Engineer	Carl Jiang
Factor	ENV216-07202_L1_Filter Off	Polarity	Line
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

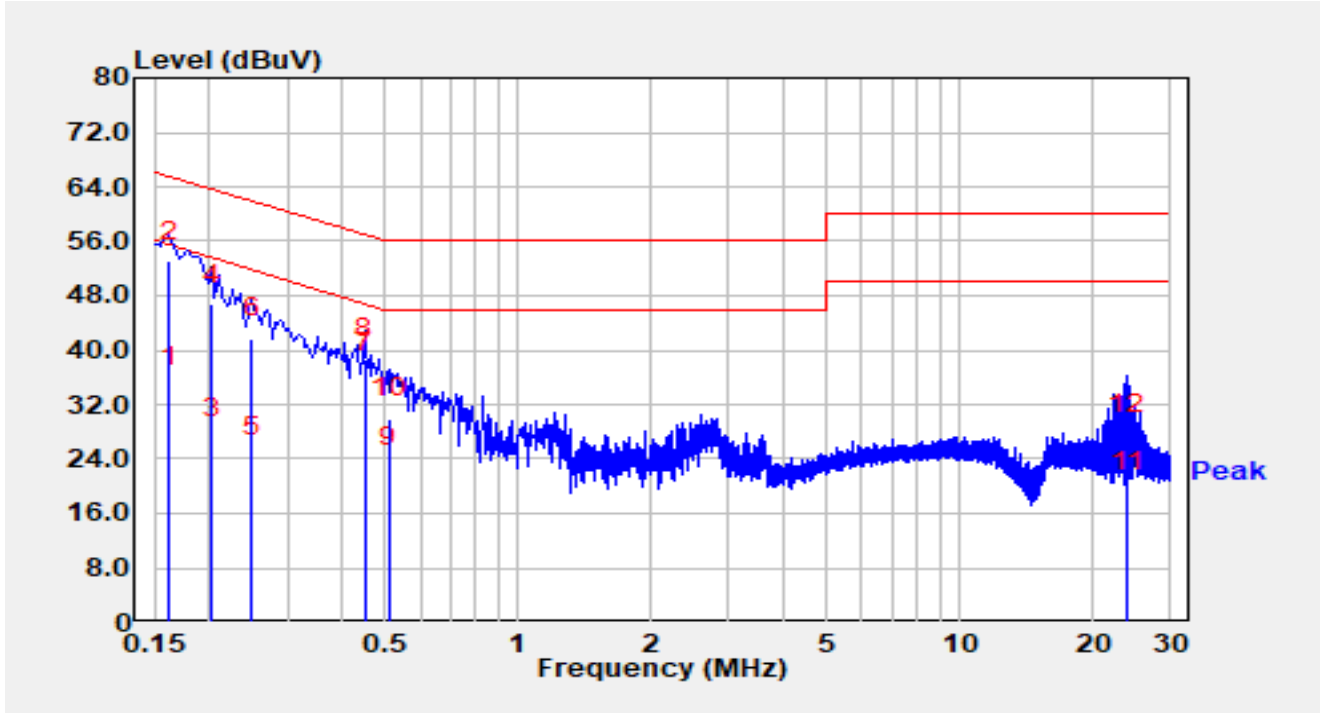


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.162	24.80	9.67	34.47	-20.89	55.36	Average
2		0.162	43.40	9.67	53.07	-12.29	65.36	QP
3		0.202	17.20	9.69	26.89	-26.64	53.53	Average
4		0.202	37.10	9.69	46.79	-16.74	63.53	QP
5		0.250	14.70	9.70	24.40	-27.36	51.76	Average
6		0.250	32.00	9.70	41.70	-20.06	61.76	QP
7	*	0.450	27.00	9.79	36.79	-10.09	46.88	Average
8		0.450	28.90	9.79	38.69	-18.19	56.88	QP
9		0.510	12.90	9.81	22.71	-23.29	46.00	Average
10		0.510	20.10	9.81	29.91	-26.09	56.00	QP
11		23.988	9.00	10.17	19.17	-30.83	50.00	Average
12		23.988	17.50	10.17	27.67	-32.33	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	WJ-SR5	Test Date	2025-02-18
Temperature	15.3 °C	Humidity	40.4 %
Limit	FCC Part 15.207_CE	Test Engineer	Carl Jiang
Factor	ENV216-07202_N_Filter Off	Polarity	Neutral
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

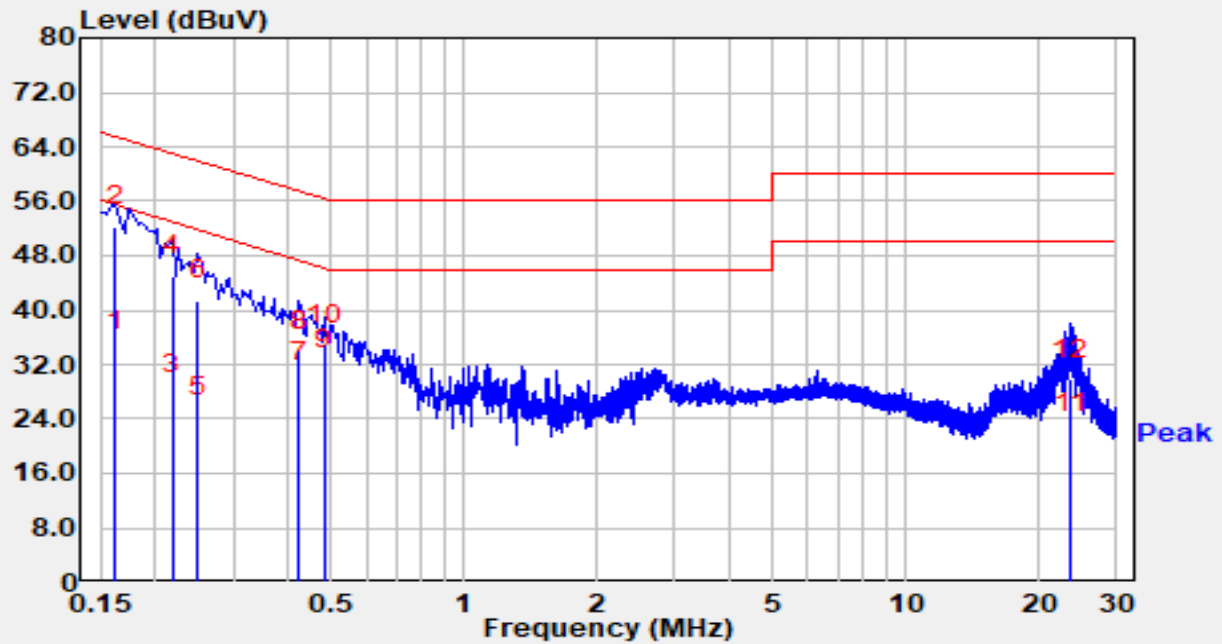

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.162	24.40	9.67	34.07	-21.29	55.36	Average
2	*	0.162	42.70	9.67	52.37	-12.99	65.36	QP
3		0.218	18.00	9.70	27.70	-25.20	52.89	Average
4		0.218	35.30	9.70	45.00	-17.90	62.89	QP
5		0.250	14.50	9.70	24.20	-27.56	51.76	Average
6		0.250	31.80	9.70	41.50	-20.26	61.76	QP
7		0.422	19.80	9.77	29.57	-17.84	47.41	Average
8		0.422	24.20	9.77	33.97	-23.44	57.41	QP
9		0.482	21.50	9.80	31.30	-15.00	46.30	Average
10		0.482	25.20	9.80	35.00	-21.30	56.30	QP
11		23.688	11.70	10.26	21.96	-28.05	50.00	Average
12		23.688	19.50	10.26	29.76	-30.25	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “2412RSU035-UT” file.

Appendix C – EUT Photograph

Refer to “2412RSU035-UE” file.

_____ The End _____