


Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

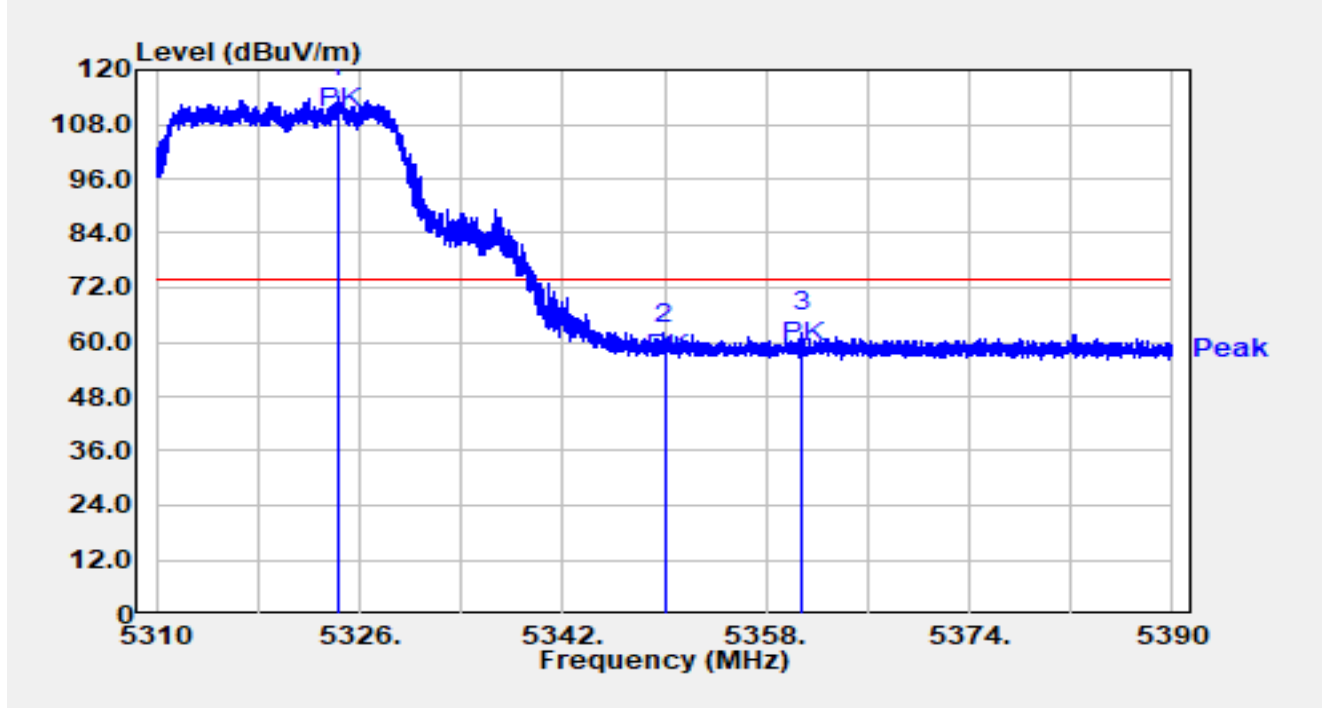


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5324.320	98.10	15.80	113.90	N/A	N/A	Peak
2		5350.000	43.85	15.68	59.53	-14.47	74.00	Peak
3	*	5360.808	46.57	15.64	62.22	-11.78	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

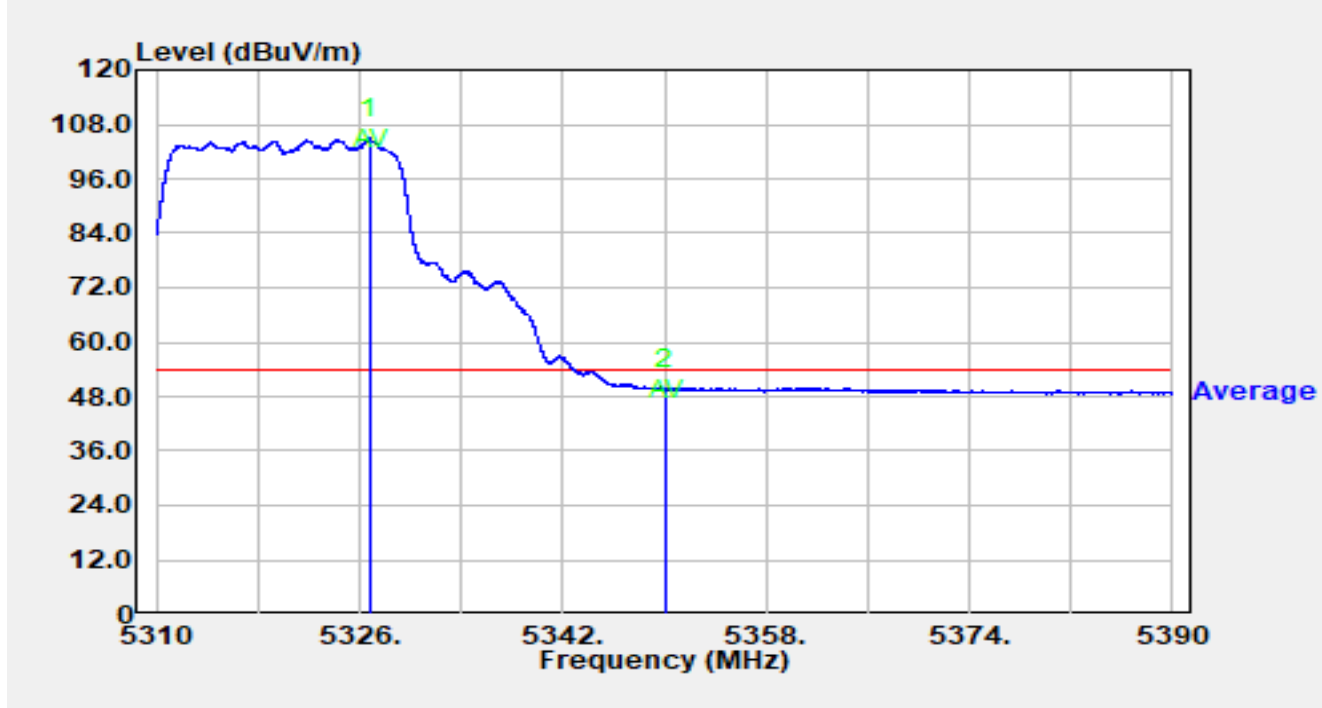


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5326.744	89.17	15.80	104.97	N/A	N/A	Average
2	*	5350.000	33.95	15.68	49.63	-4.37	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

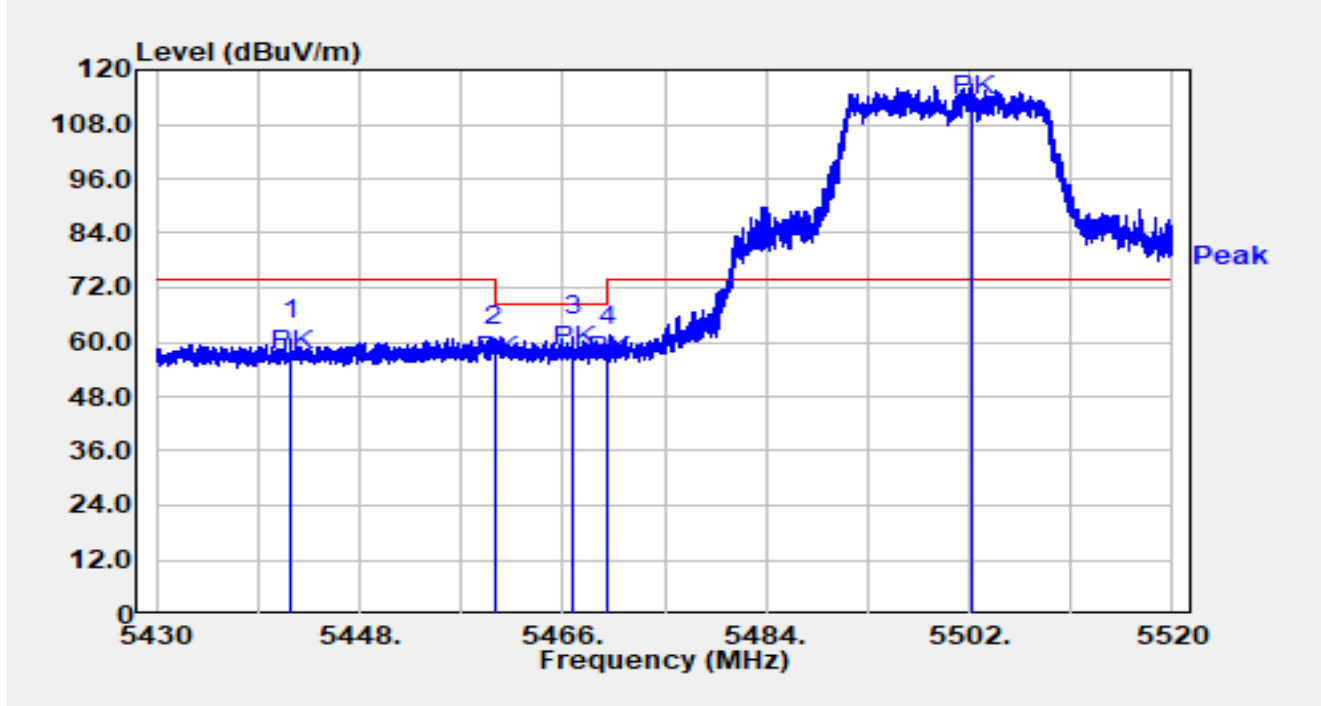


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5441.916	44.55	15.90	60.45	-13.55	74.00	Peak
2		5460.000	43.19	16.02	59.21	-8.99	68.20	Peak
3	*	5466.945	45.30	15.99	61.29	-6.91	68.20	Peak
4		5470.000	42.90	15.98	58.88	-9.32	68.20	Peak
5		5502.225	100.49	16.20	116.69	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

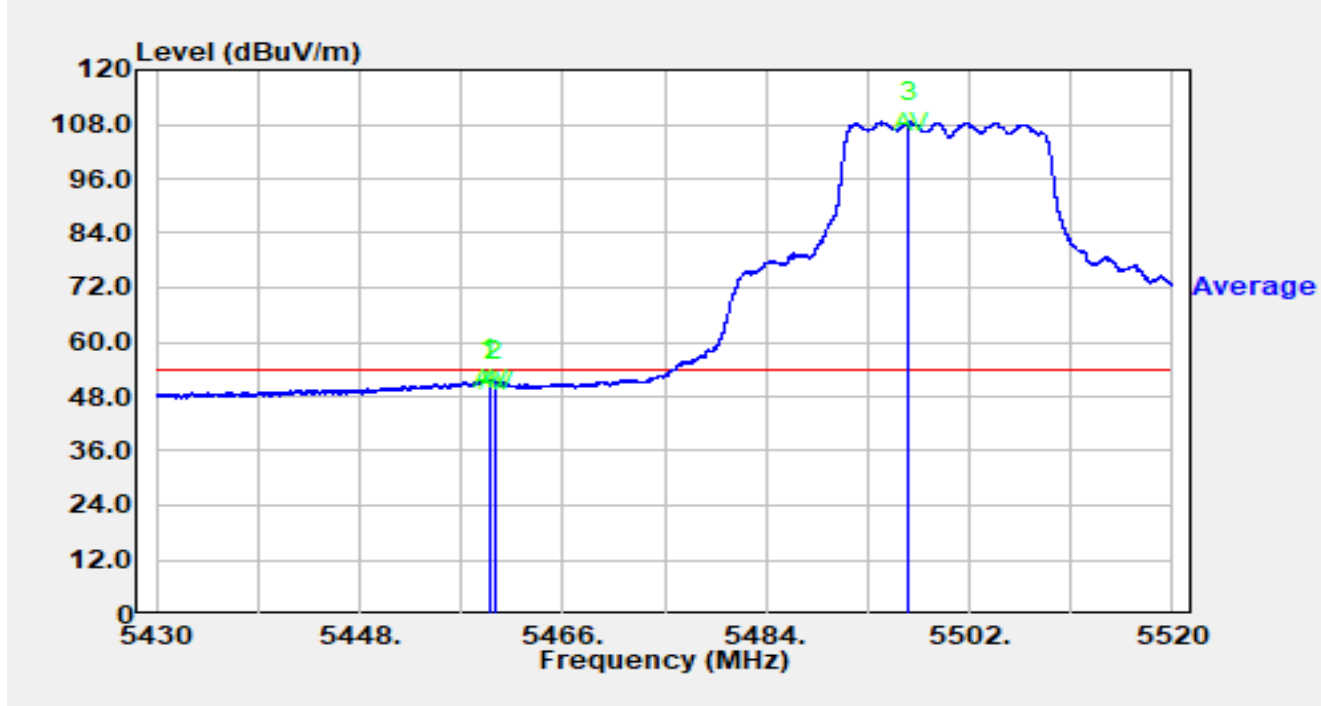


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.547	35.77	16.02	51.79	-2.21	54.00	Average
2		5460.000	35.44	16.02	51.47	-2.53	54.00	Average
3		5496.654	92.37	16.14	108.51	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

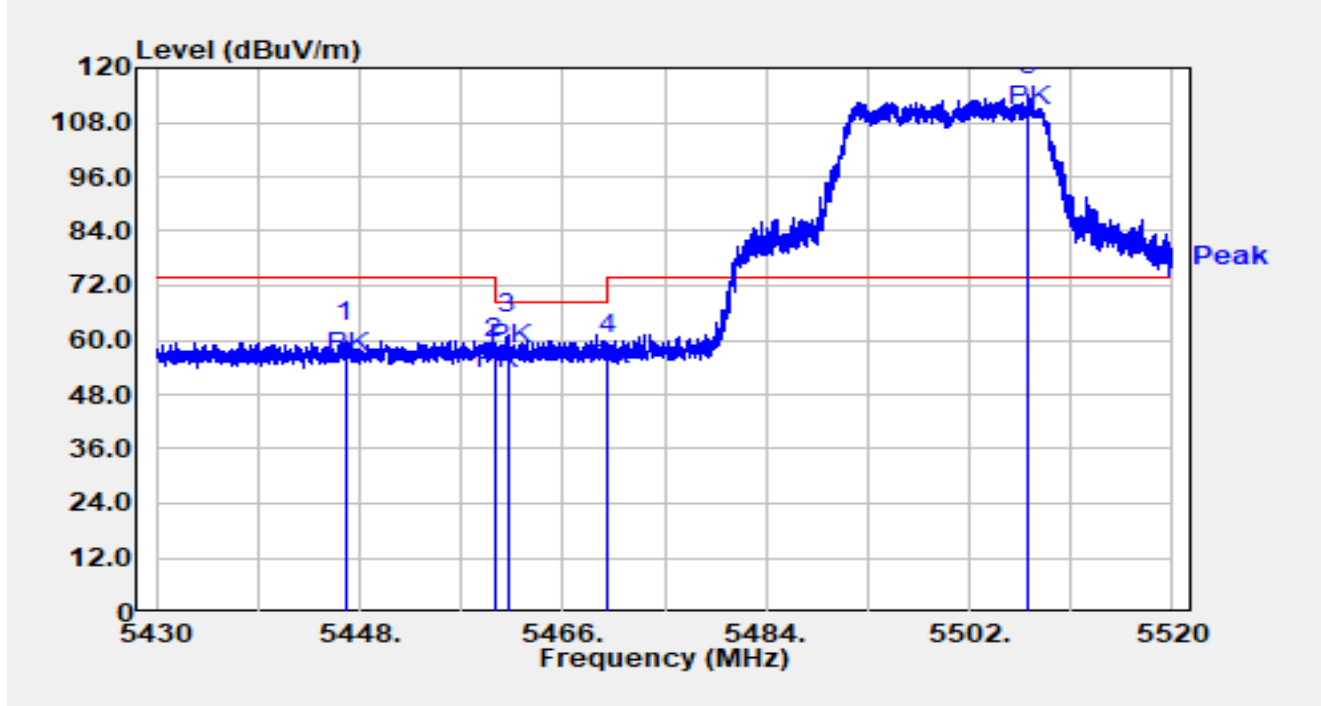


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5446.713	43.68	15.95	59.63	-14.37	74.00	Peak
2		5460.000	40.11	16.02	56.14	-12.06	68.20	Peak
3	*	5461.149	45.14	16.02	61.16	-7.04	68.20	Peak
4		5470.000	40.65	15.98	56.63	-11.57	68.20	Peak
5		5507.238	97.68	16.22	113.90	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

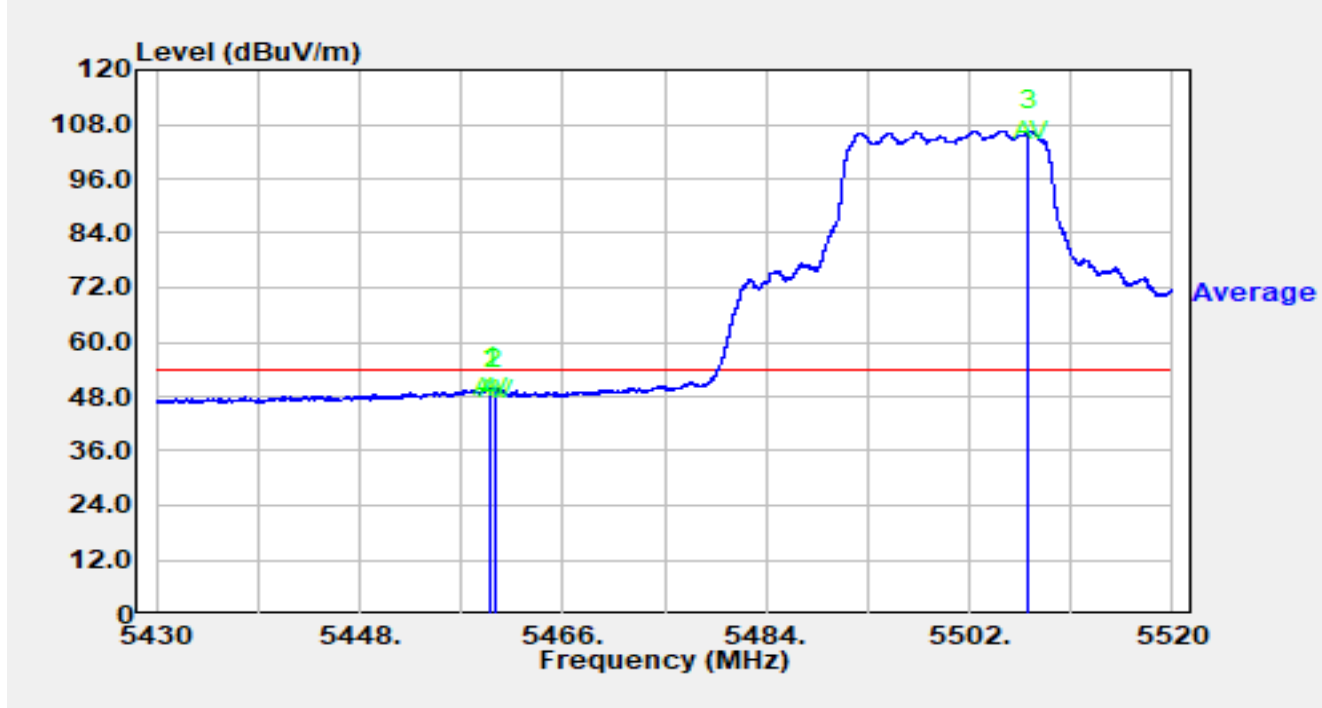


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.565	33.87	16.02	49.89	-4.11	54.00	Average
2		5460.000	33.54	16.02	49.56	-4.44	54.00	Average
3		5507.283	90.41	16.22	106.64	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5700MHz		

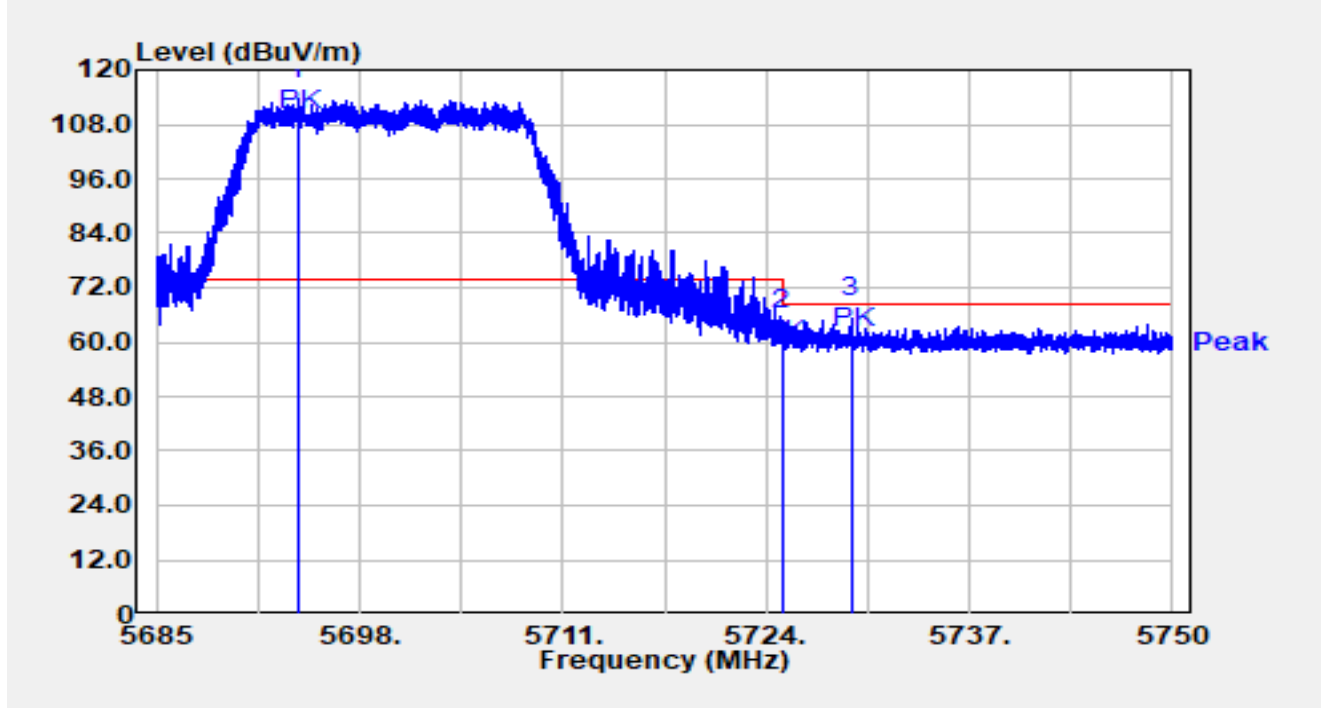


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5694.074	96.66	16.78	113.44	N/A	N/A	Peak
2		5725.000	45.60	16.92	62.52	-5.68	68.20	Peak
3	*	5729.434	48.29	16.93	65.22	-2.98	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5700MHz		

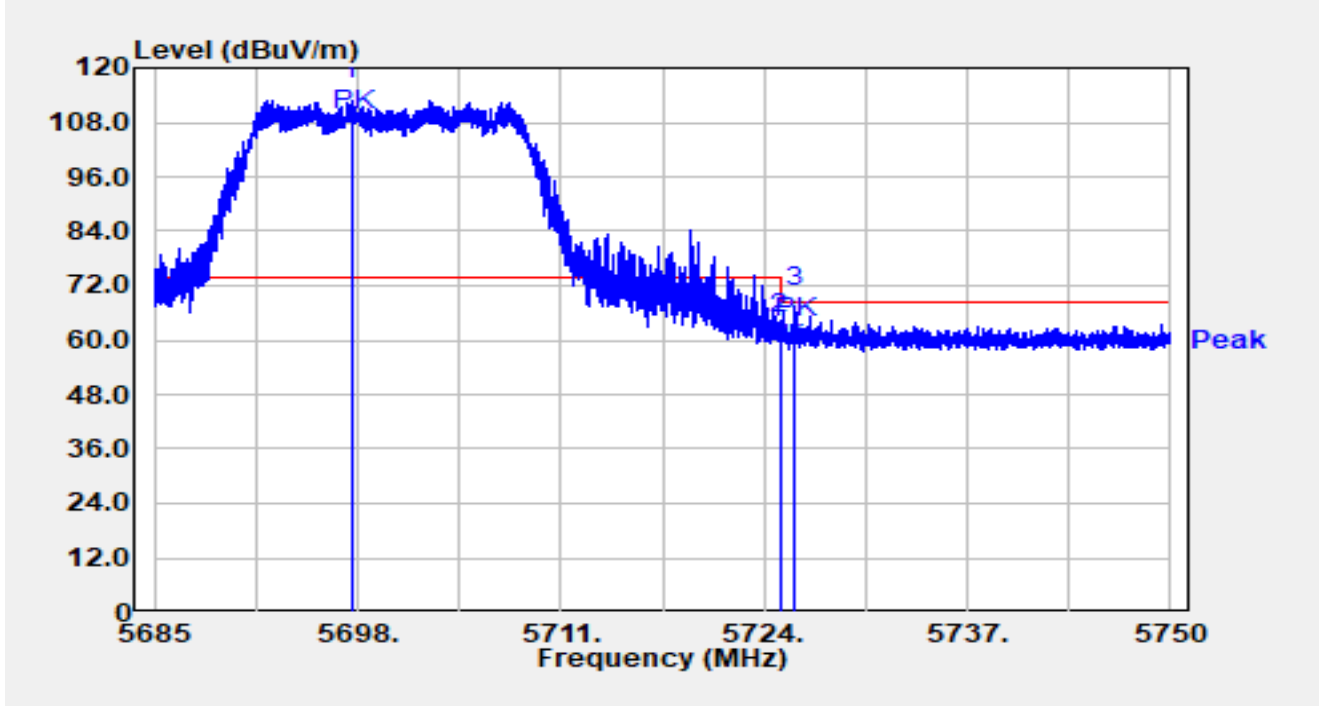


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5697.643	96.13	16.80	112.93	N/A	N/A	Peak
2		5725.000	44.59	16.92	61.51	-6.69	68.20	Peak
3	*	5725.943	50.44	16.93	67.37	-0.83	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5745MHz		

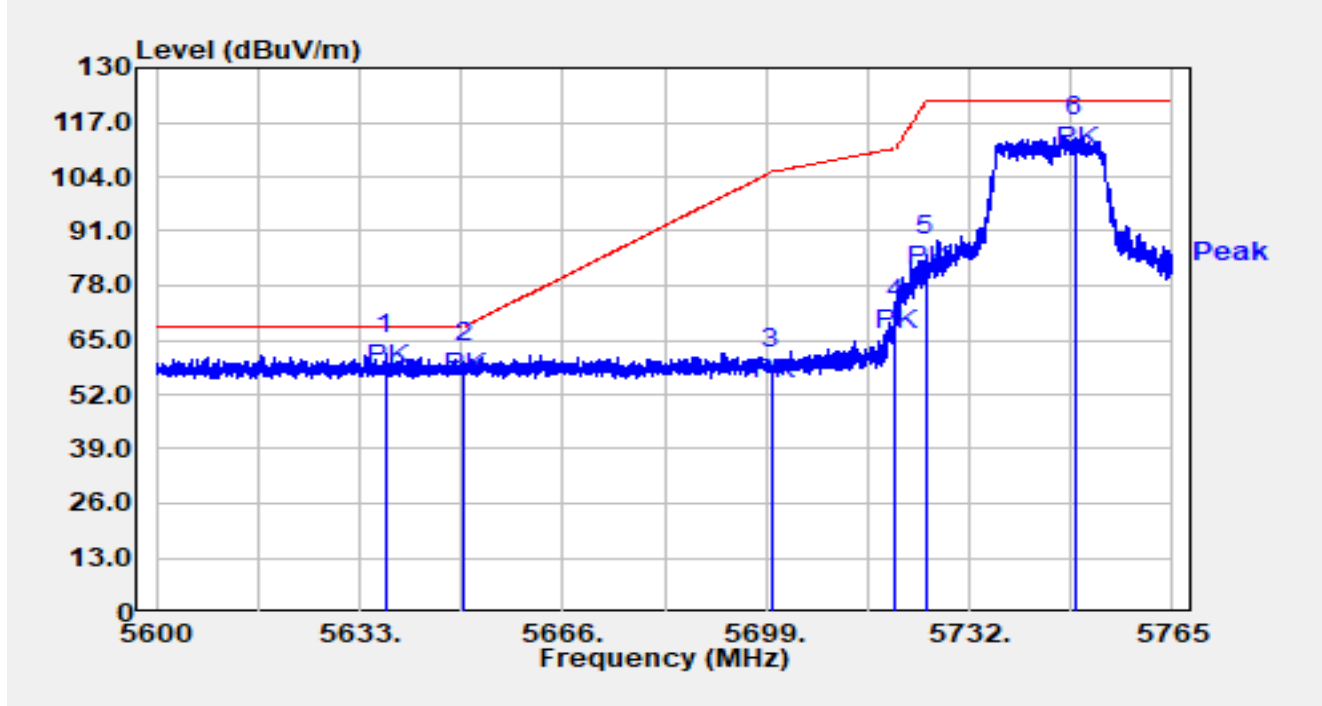


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5637.191	45.12	16.60	61.72	-6.48	68.20	Peak
2		5650.000	42.96	16.65	59.61	-8.59	68.20	Peak
3		5700.000	41.44	16.81	58.26	-46.94	105.20	Peak
4		5720.000	53.13	16.90	70.03	-40.77	110.80	Peak
5		5725.000	68.18	16.92	85.11	-37.09	122.20	Peak
6		5749.275	96.49	16.99	113.47	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5745MHz		

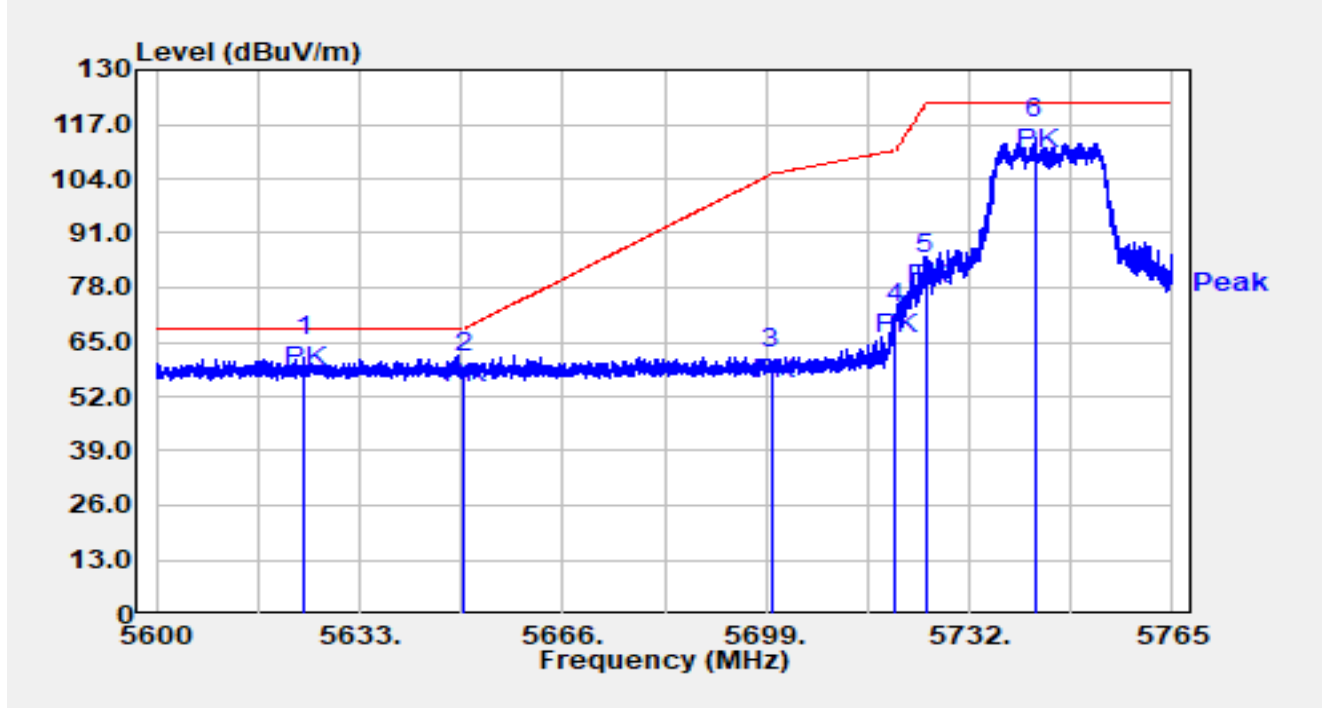


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5624.090	45.00	16.51	61.51	-6.69	68.20	Peak
2		5650.000	40.92	16.65	57.57	-10.63	68.20	Peak
3		5700.000	41.93	16.81	58.74	-46.46	105.20	Peak
4		5720.000	52.75	16.90	69.65	-41.15	110.80	Peak
5		5725.000	64.17	16.92	81.09	-41.11	122.20	Peak
6		5742.675	96.62	16.96	113.57	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5825MHz		

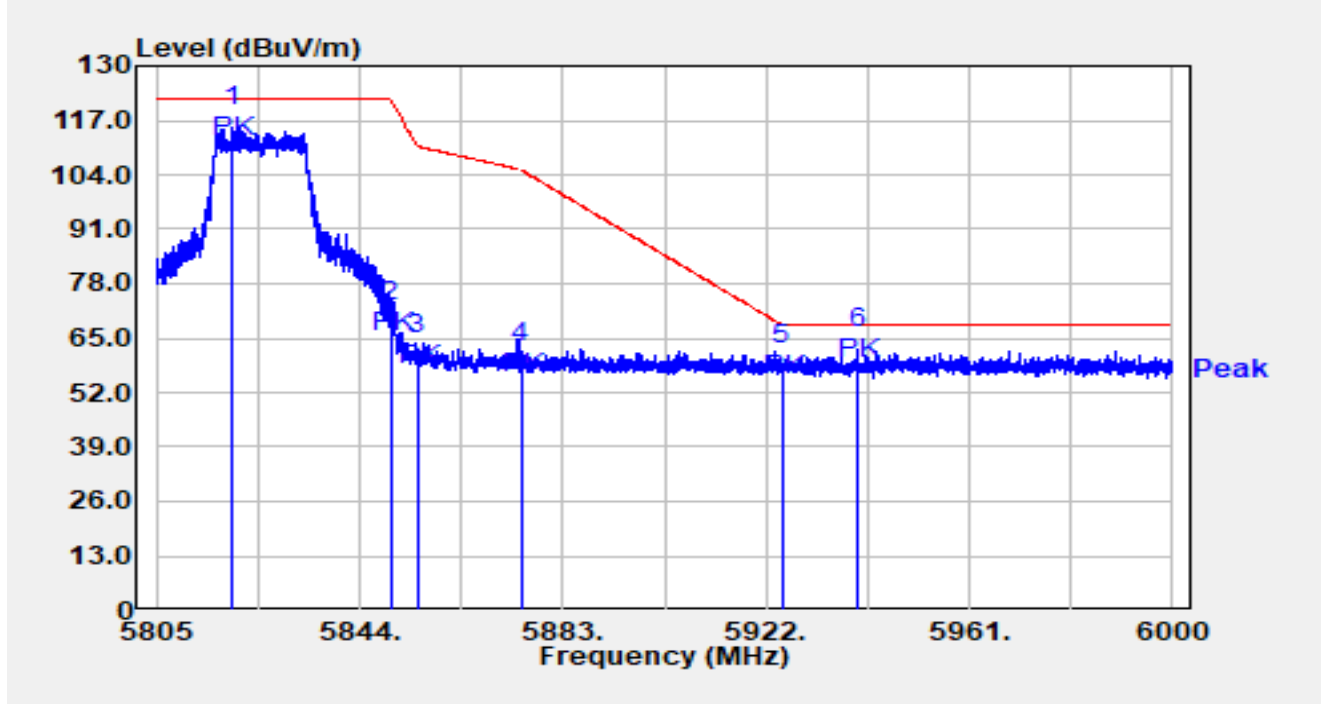


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5819.586	631.91	-516.42	115.49	N/A	N/A	Peak
2		5850.000	585.60	-516.46	69.14	-53.06	122.20	Peak
3		5855.000	577.63	-516.45	61.18	-49.62	110.80	Peak
4		5875.000	575.51	-516.39	59.13	-46.07	105.20	Peak
5		5925.000	574.80	-516.37	58.42	-9.78	68.20	Peak
6	*	5939.569	578.64	-516.31	62.32	-5.88	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5825MHz		

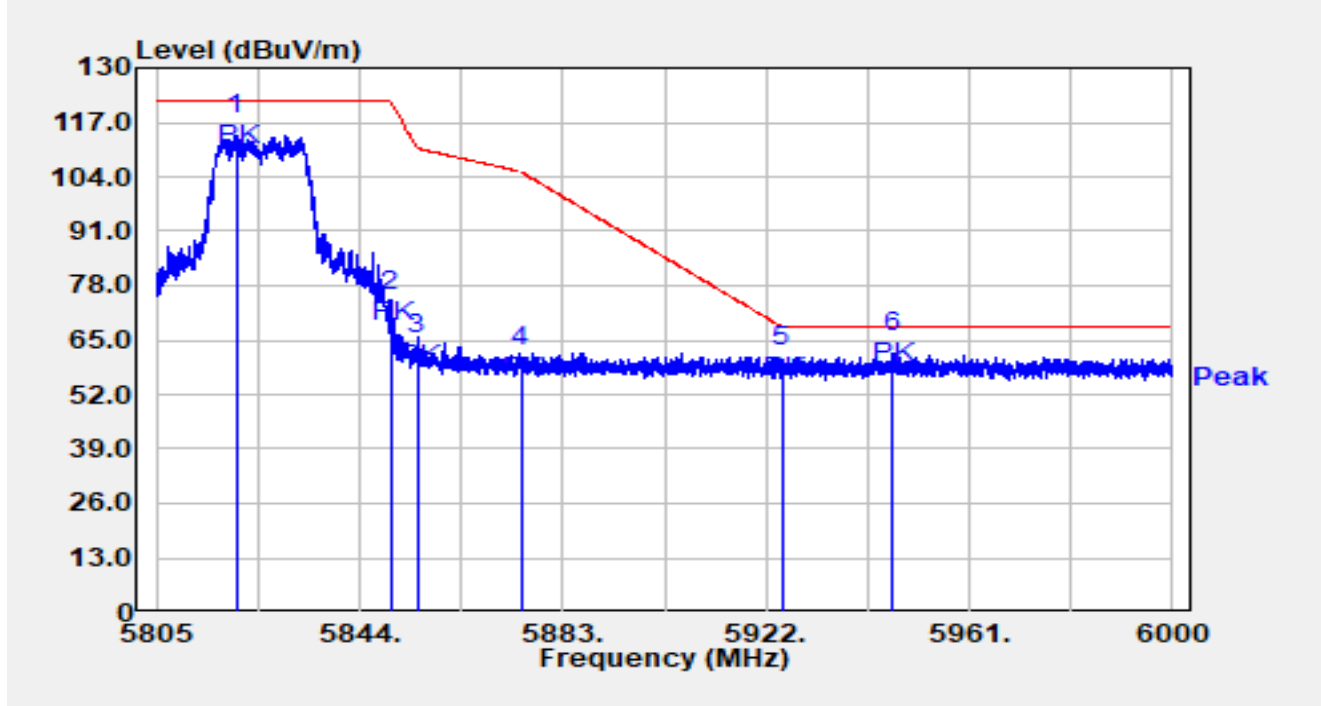


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5820.269	96.55	17.37	113.92	N/A	N/A	Peak
2		5850.000	54.50	17.31	71.81	-50.39	122.20	Peak
3		5855.000	44.41	17.32	61.73	-49.07	110.80	Peak
4		5875.000	41.25	17.38	58.63	-46.57	105.20	Peak
5		5925.000	41.05	17.36	58.41	-9.79	68.20	Peak
6	*	5946.395	44.52	17.44	61.97	-6.23	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

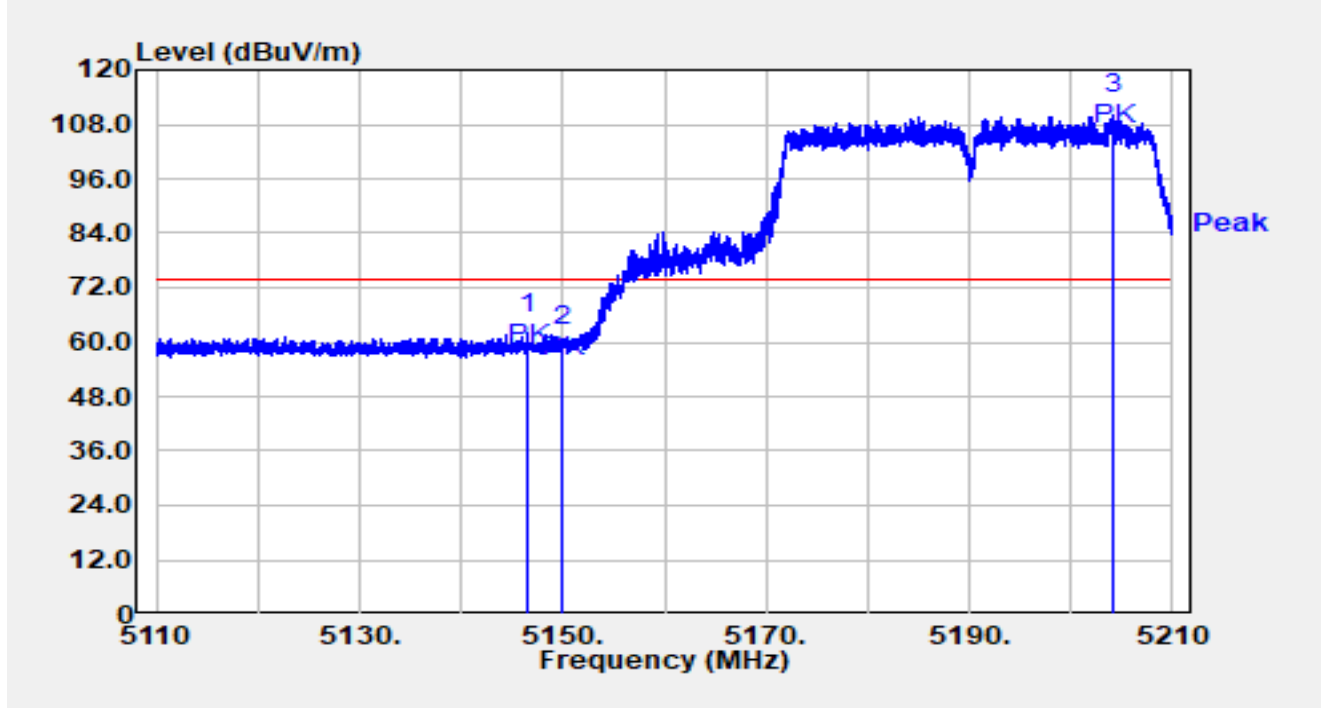


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.510	45.94	15.99	61.93	-12.07	74.00	Peak
2		5150.000	42.92	16.00	58.92	-15.08	74.00	Peak
3		5204.210	94.21	15.94	110.15	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

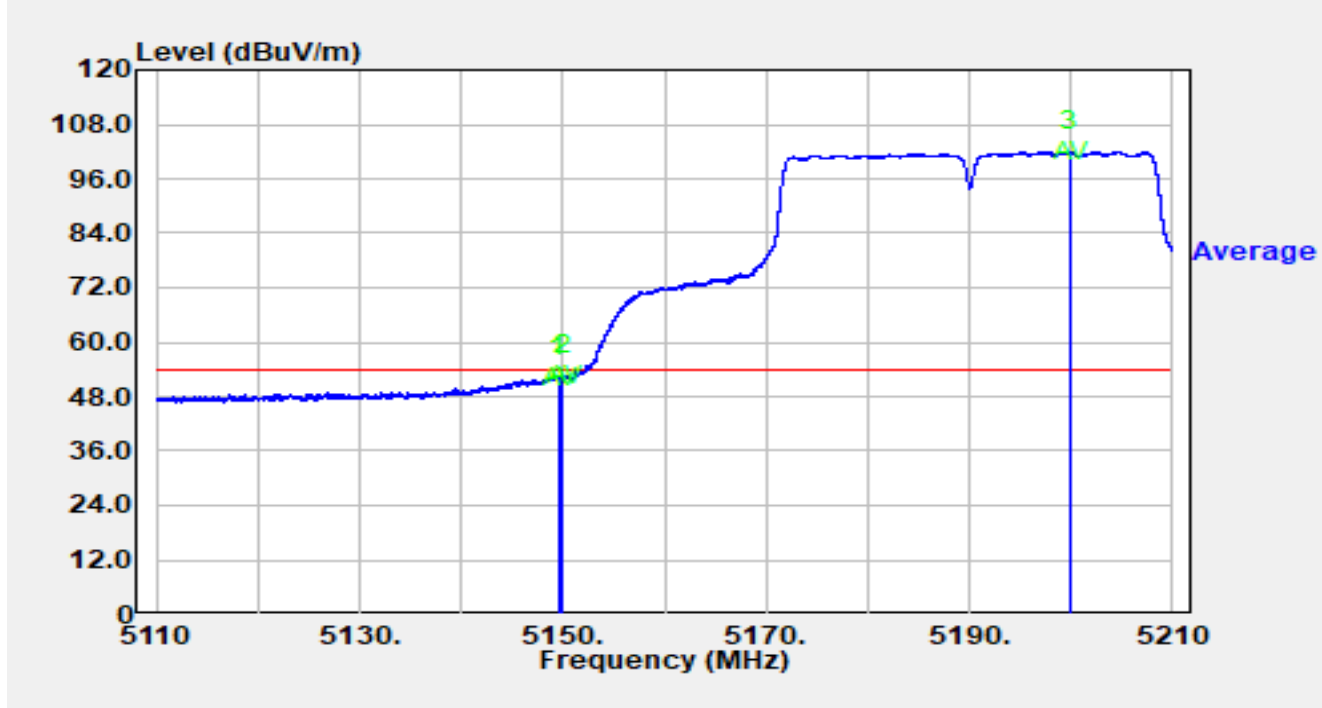


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5149.600	36.37	16.00	52.36	-1.64	54.00	Average
2	*	5150.000	36.64	16.00	52.63	-1.37	54.00	Average
3		5199.880	86.05	15.97	102.02	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

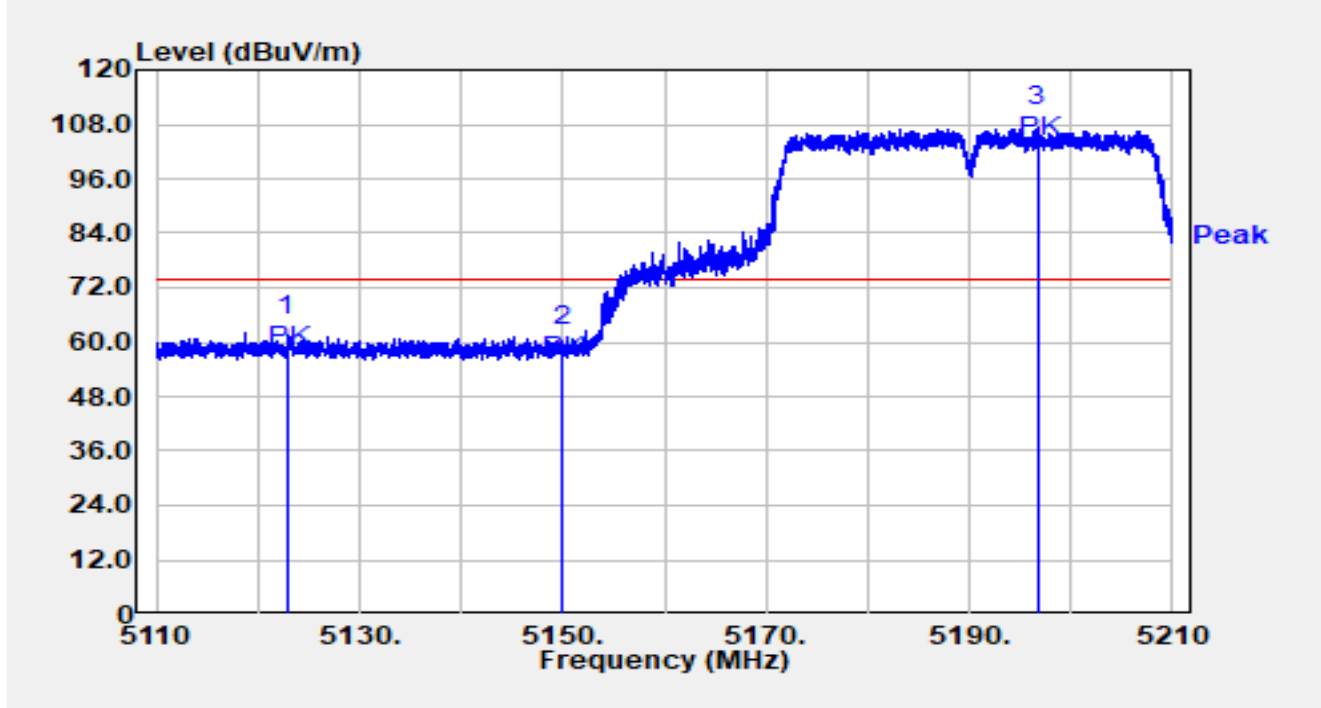


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5122.890	45.41	16.05	61.46	-12.54	74.00	Peak
2		5150.000	43.21	16.00	59.20	-14.80	74.00	Peak
3		5196.800	91.49	15.97	107.46	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

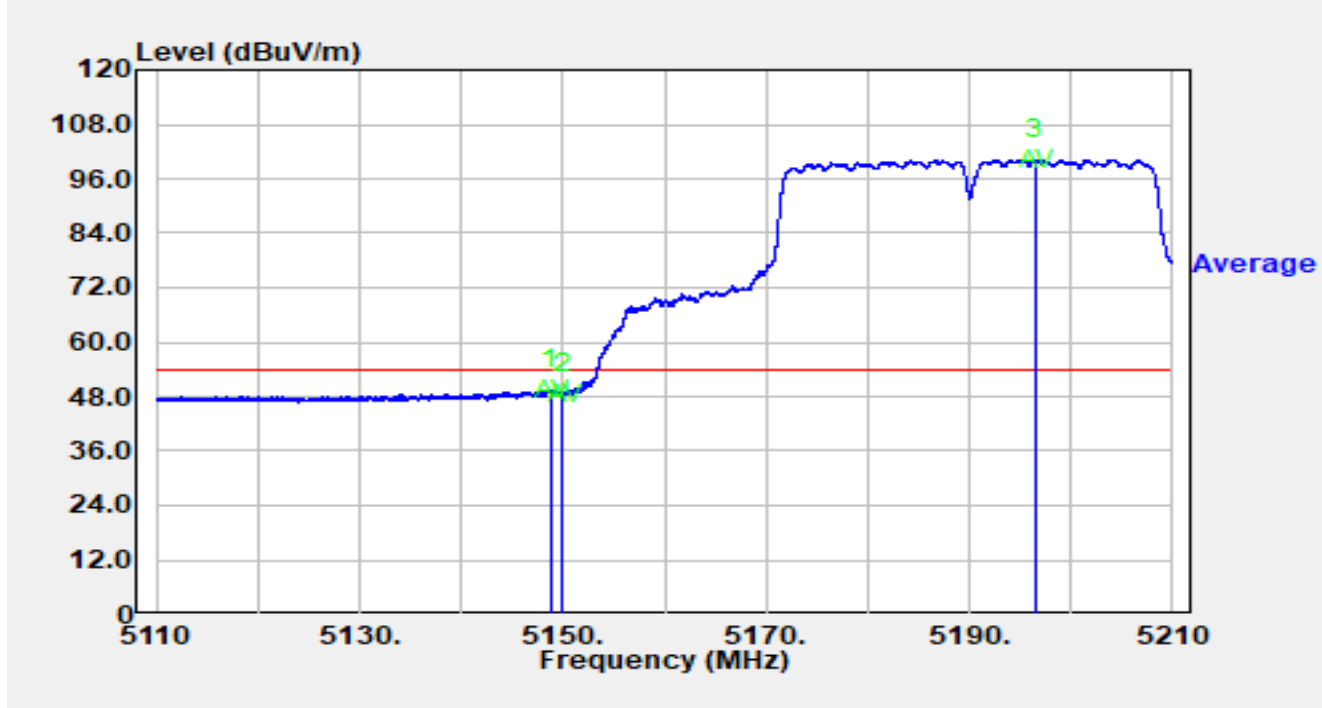


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.840	33.57	16.00	49.57	-4.43	54.00	Average
2		5150.000	32.51	16.00	48.50	-5.50	54.00	Average
3		5196.540	84.31	15.97	100.28	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

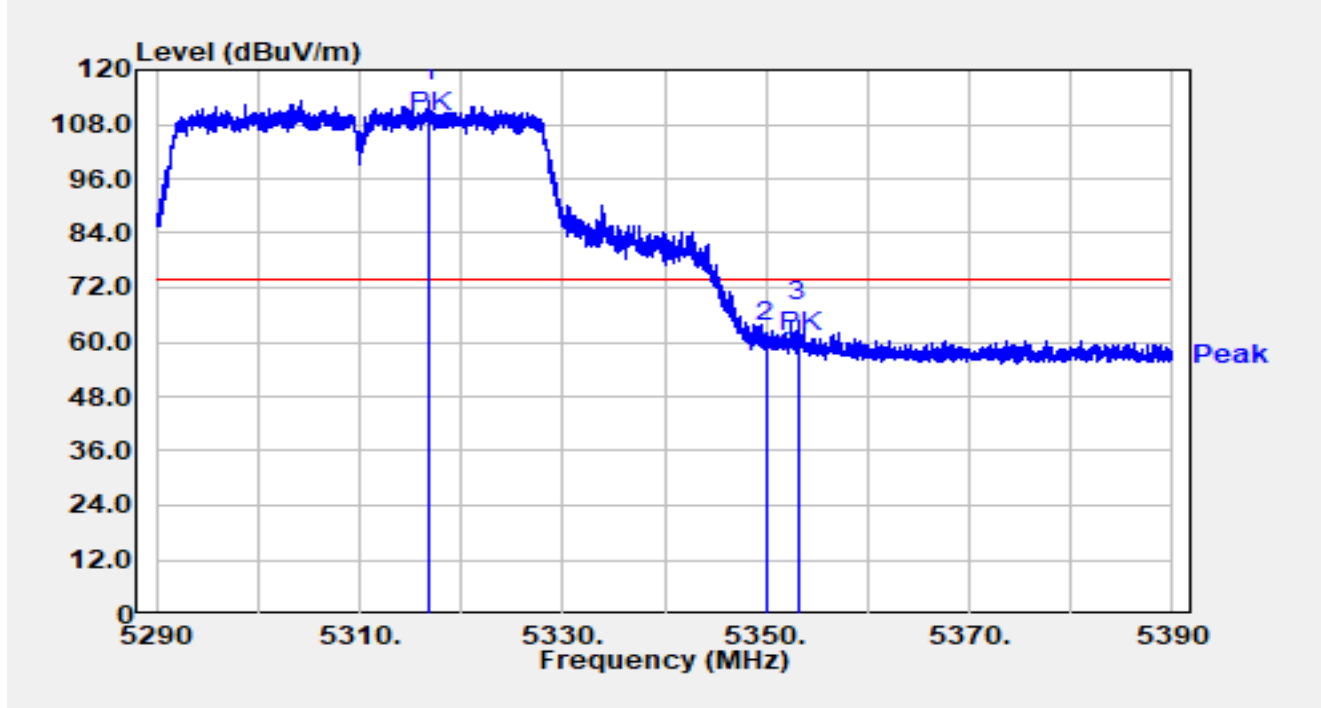


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5316.860	97.37	15.79	113.16	N/A	N/A	Peak
2		5350.000	44.54	15.68	60.22	-13.78	74.00	Peak
3	*	5353.160	48.91	15.67	64.58	-9.42	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

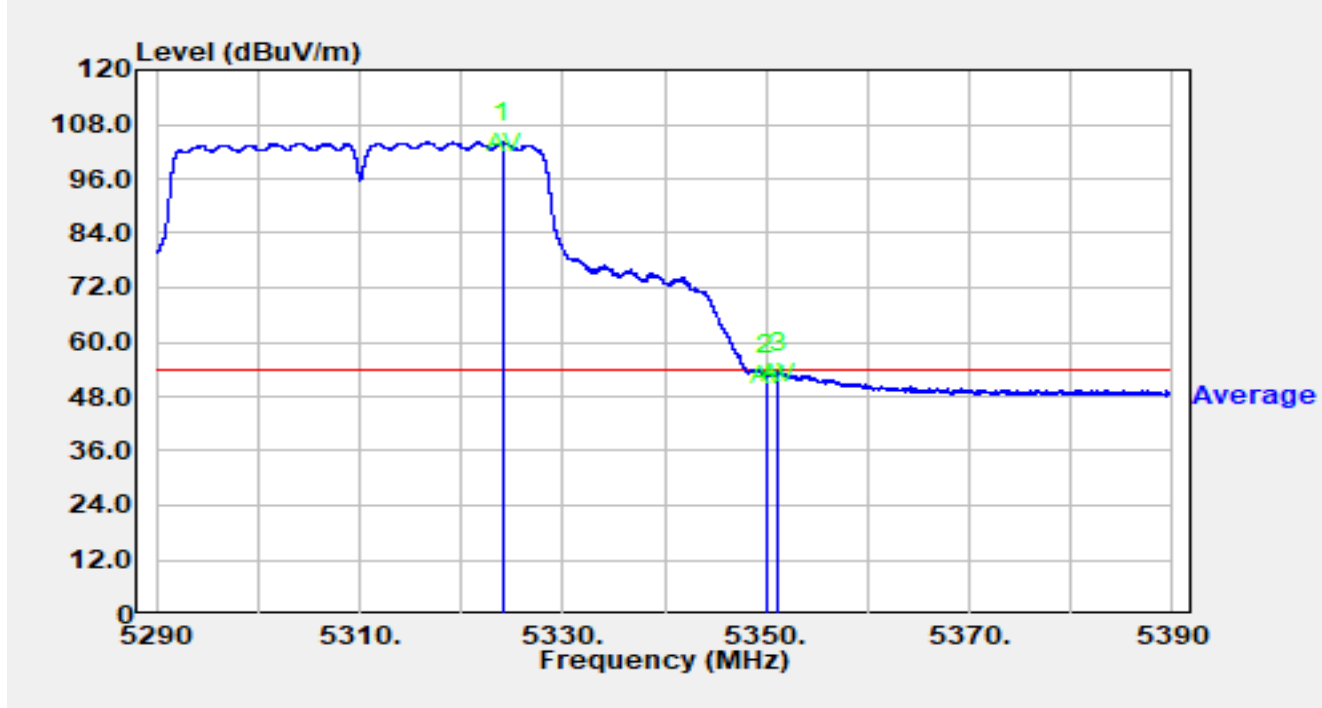


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5324.120	88.25	15.80	104.05	N/A	N/A	Average
2		5350.000	37.28	15.68	52.96	-1.04	54.00	Average
3	*	5351.170	37.58	15.68	53.26	-0.74	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

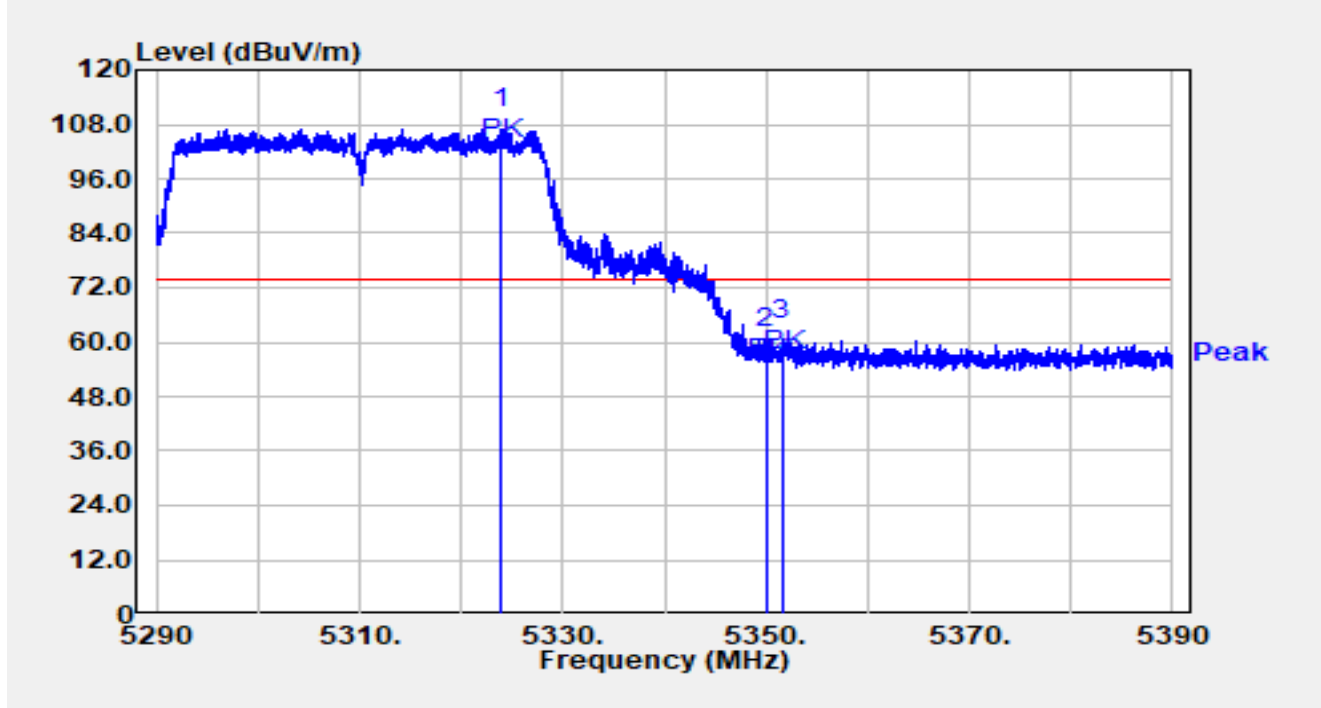


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5323.910	91.26	15.80	107.06	N/A	N/A	Peak
2		5350.000	43.01	15.68	58.69	-15.31	74.00	Peak
3	*	5351.640	44.93	15.68	60.61	-13.39	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

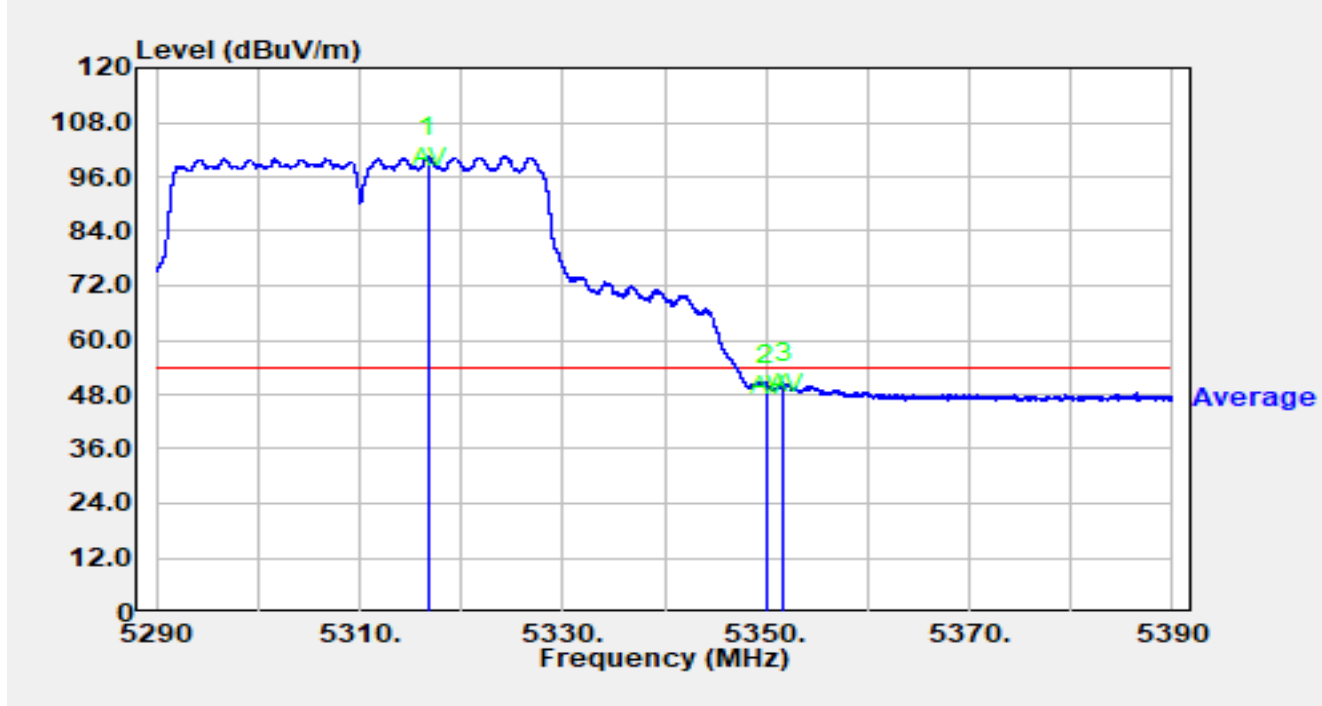


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5316.780	84.62	15.79	100.41	N/A	N/A	Average
2		5350.000	34.47	15.68	50.15	-3.85	54.00	Average
3	*	5351.710	34.94	15.68	50.62	-3.38	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

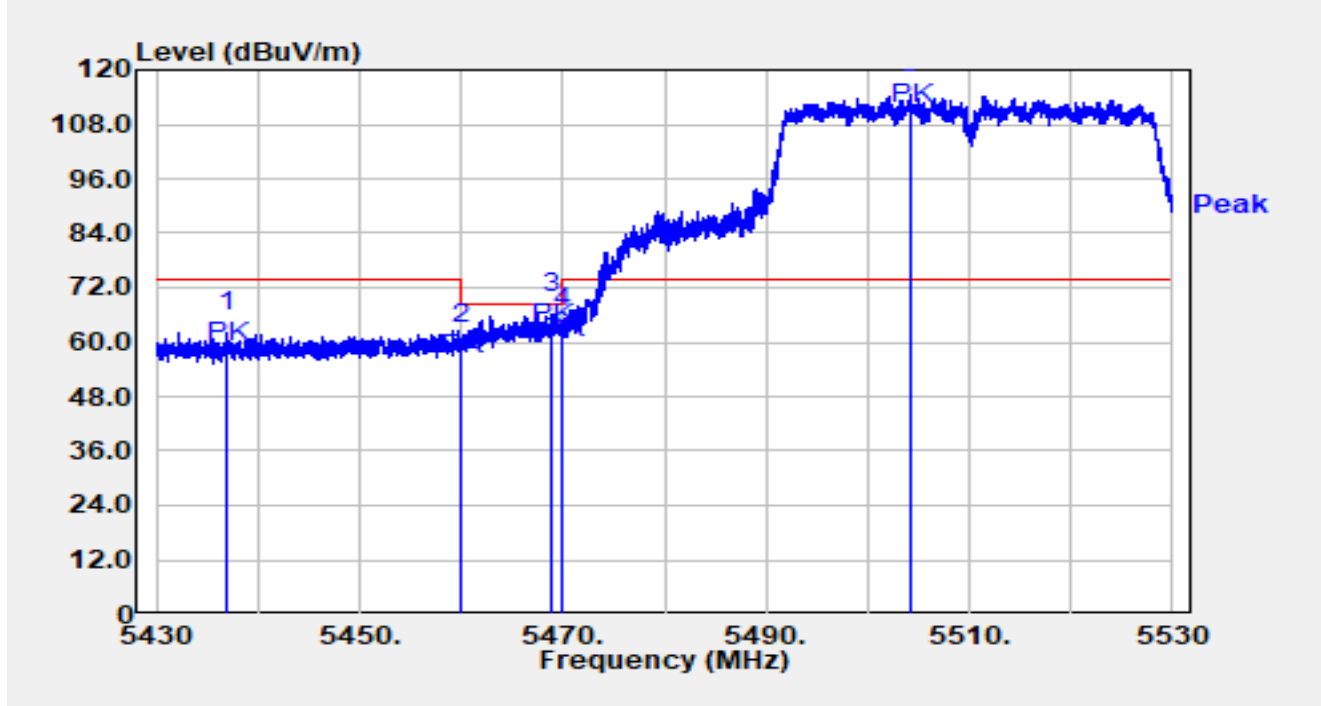


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5437.000	46.37	15.85	62.21	-11.79	74.00	Peak
2		5460.000	43.37	16.02	59.39	-8.81	68.20	Peak
3	*	5468.940	50.31	15.99	66.29	-1.91	68.20	Peak
4		5470.000	47.13	15.98	63.11	-5.09	68.20	Peak
5		5504.290	98.35	16.22	114.57	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

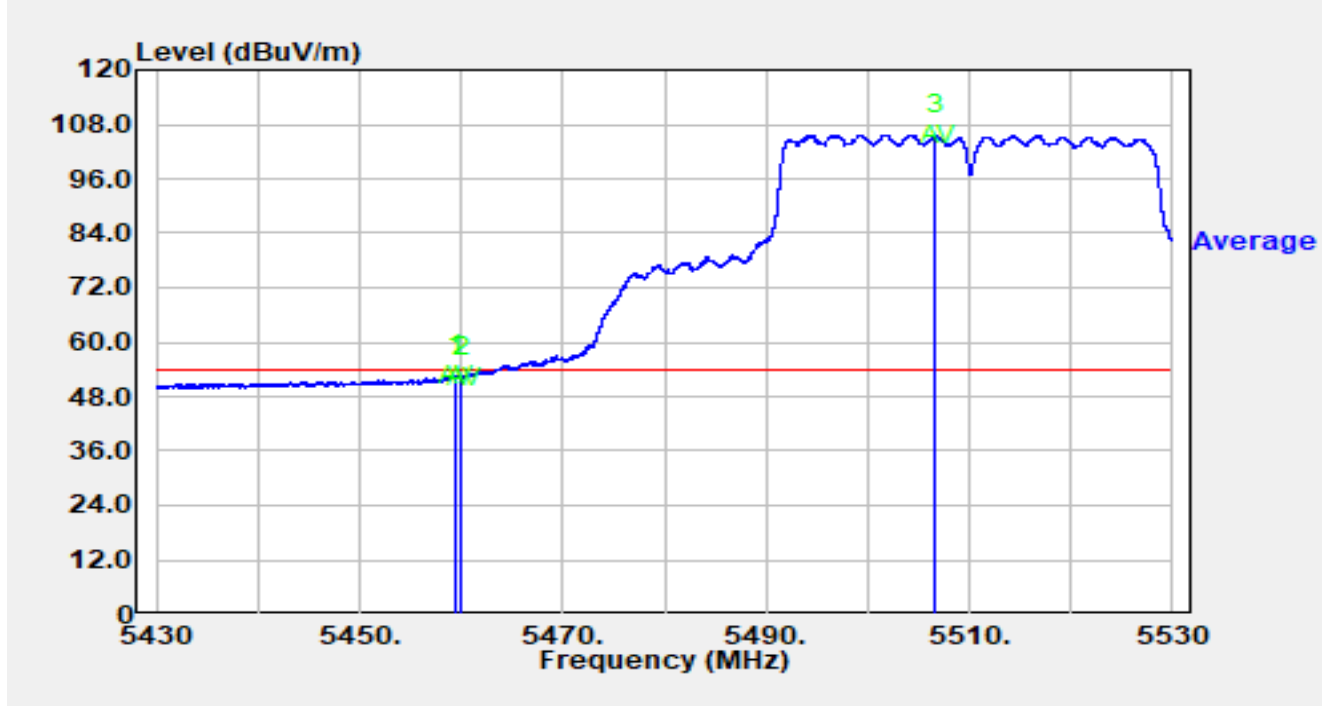


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.470	36.61	16.02	52.63	-1.37	54.00	Average
2		5460.000	36.12	16.02	52.15	-1.85	54.00	Average
3		5506.640	89.40	16.23	105.62	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

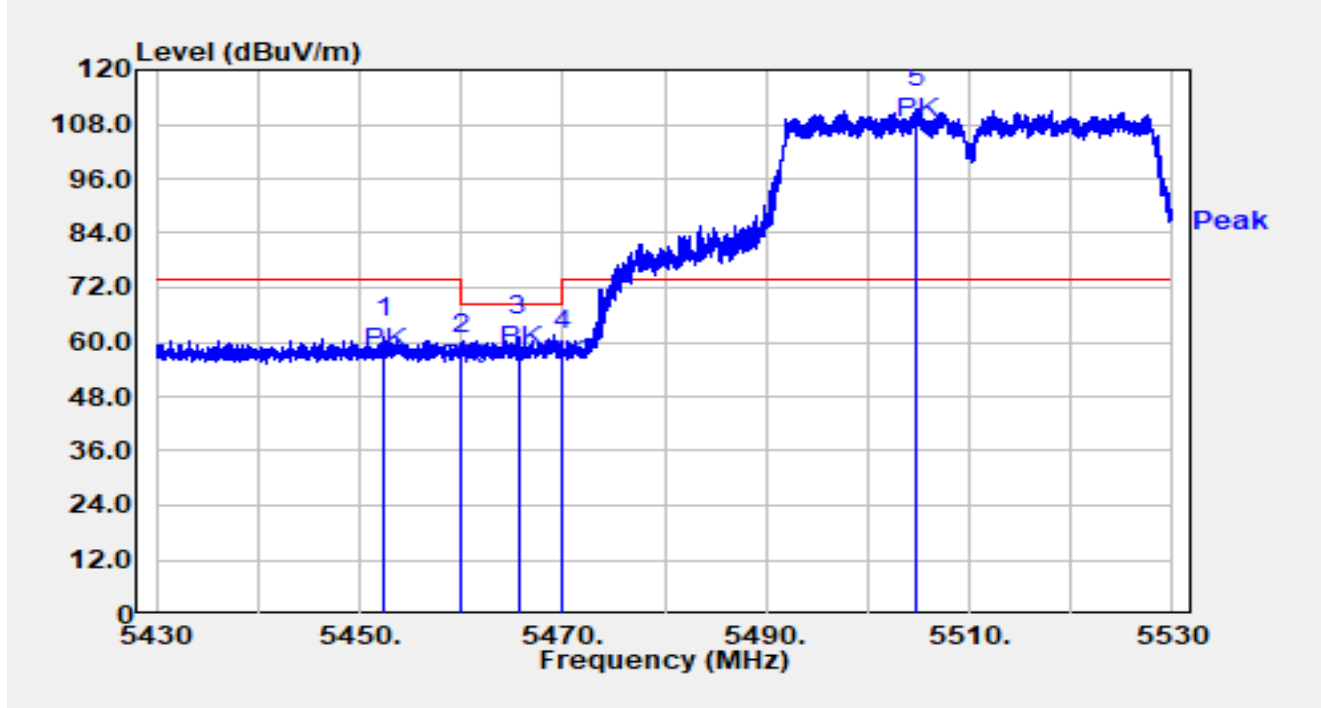


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5452.480	44.94	16.02	60.96	-13.04	74.00	Peak
2		5460.000	41.21	16.02	57.23	-10.97	68.20	Peak
3	*	5465.610	45.32	16.00	61.32	-6.88	68.20	Peak
4		5470.000	42.32	15.98	58.30	-9.90	68.20	Peak
5		5504.820	95.23	16.23	111.45	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

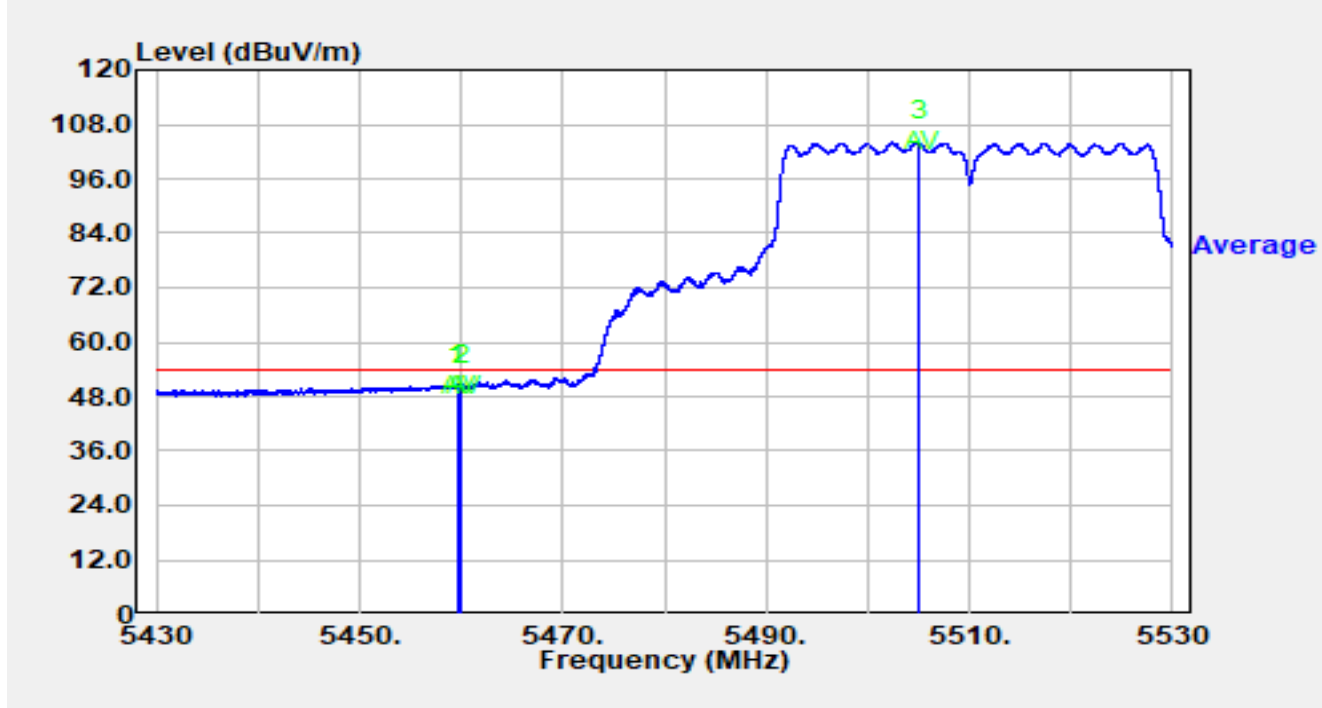


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.690	34.51	16.02	50.54	-3.46	54.00	Average
2		5460.000	34.27	16.02	50.29	-3.71	54.00	Average
3		5505.080	87.95	16.23	104.18	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5670MHz		

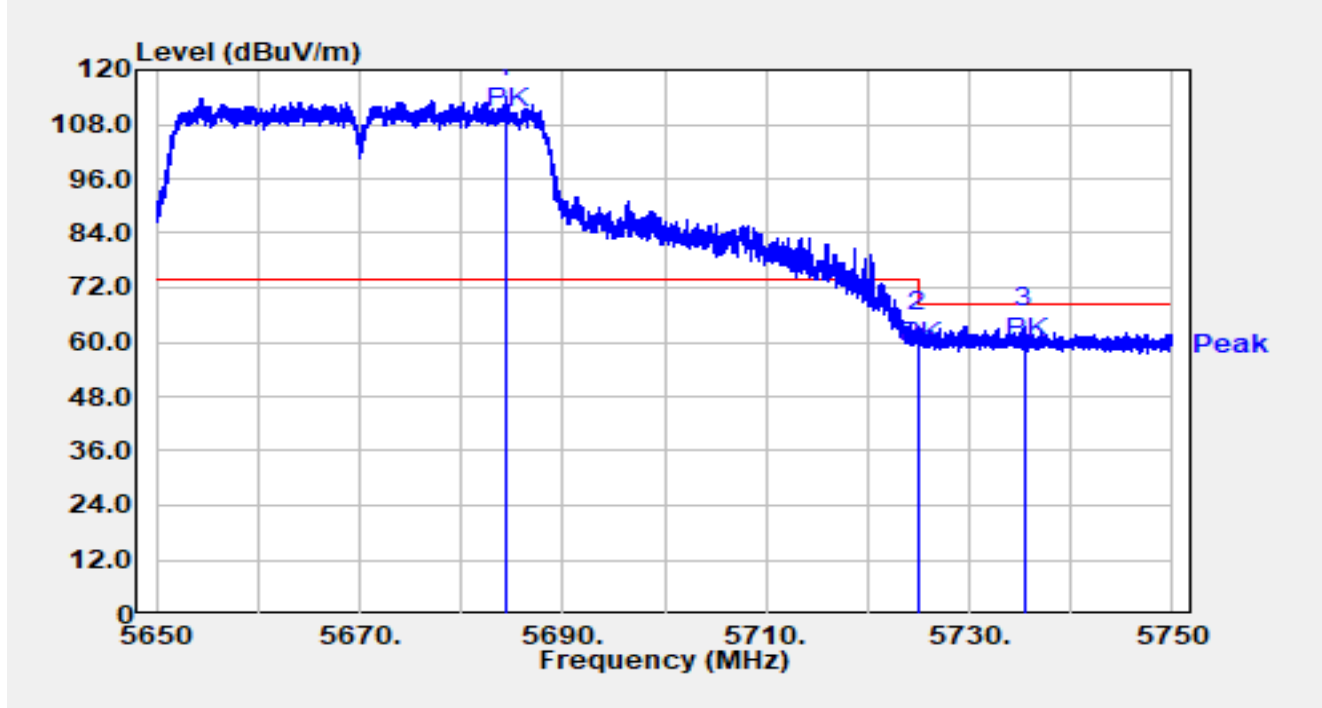


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5684.310	97.19	16.71	113.90	N/A	N/A	Peak
2		5725.000	45.37	16.92	62.29	-5.91	68.20	Peak
3	*	5735.380	46.33	16.95	63.28	-4.92	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5670MHz		

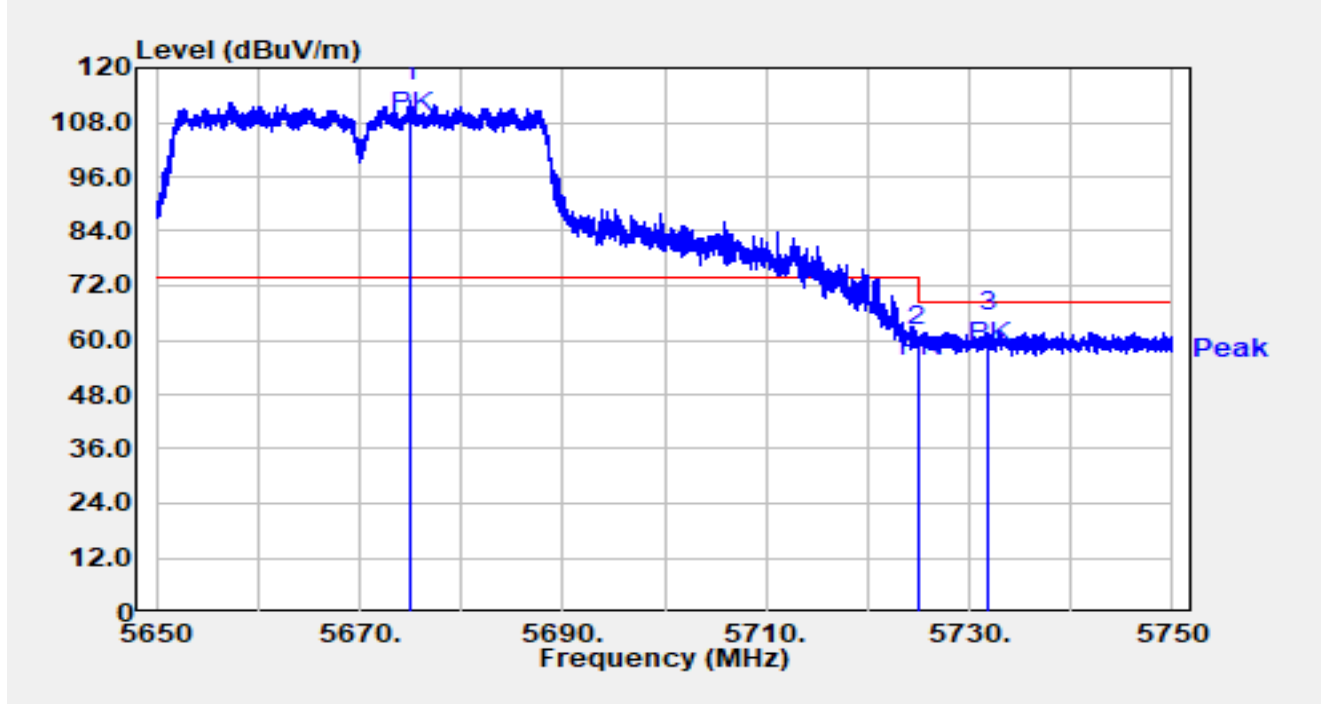


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5675.040	96.12	16.63	112.75	N/A	N/A	Peak
2		5725.000	41.87	16.92	58.79	-9.41	68.20	Peak
3	*	5731.880	44.81	16.94	61.75	-6.45	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5755MHz		

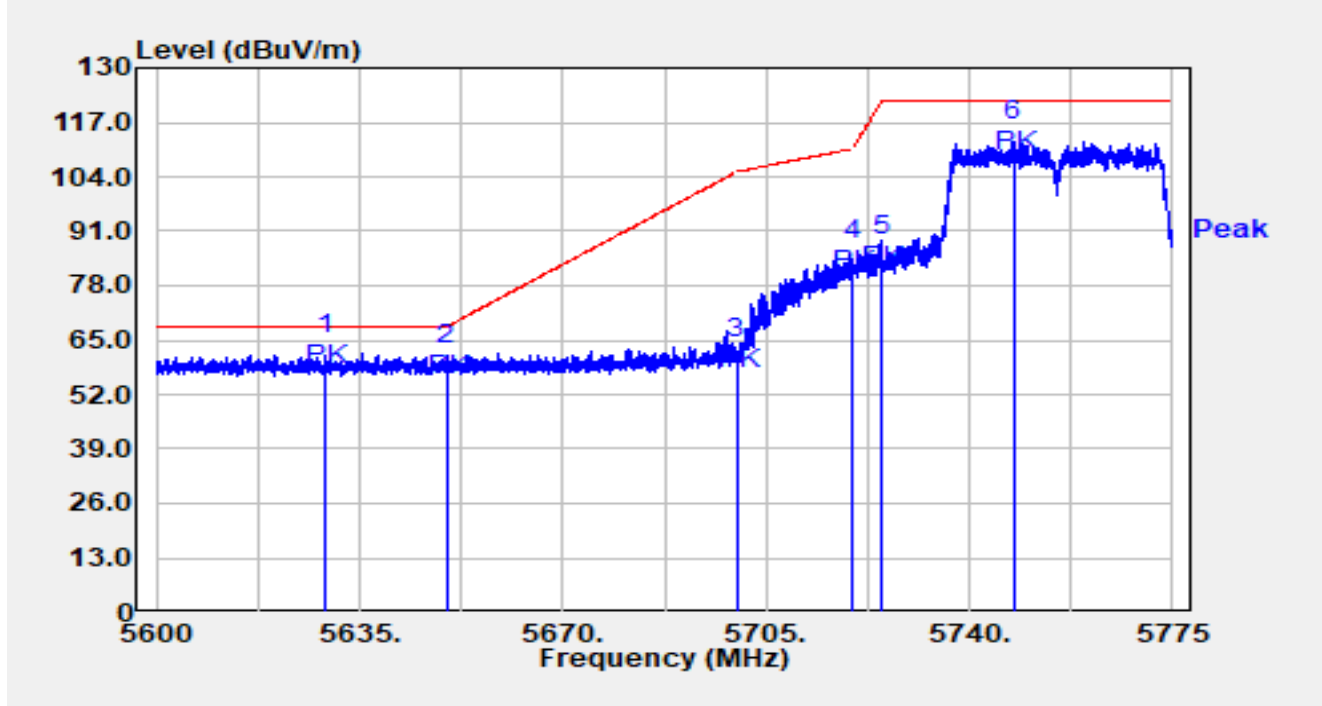


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5629.067	45.00	16.55	61.54	-6.66	68.20	Peak
2		5650.000	42.52	16.65	59.18	-9.02	68.20	Peak
3		5700.000	43.77	16.81	60.58	-44.62	105.20	Peak
4		5720.000	67.25	16.90	84.15	-26.65	110.80	Peak
5		5725.000	68.10	16.92	85.02	-37.18	122.20	Peak
6		5747.560	95.43	16.98	112.41	N/A	N/A	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5755MHz		

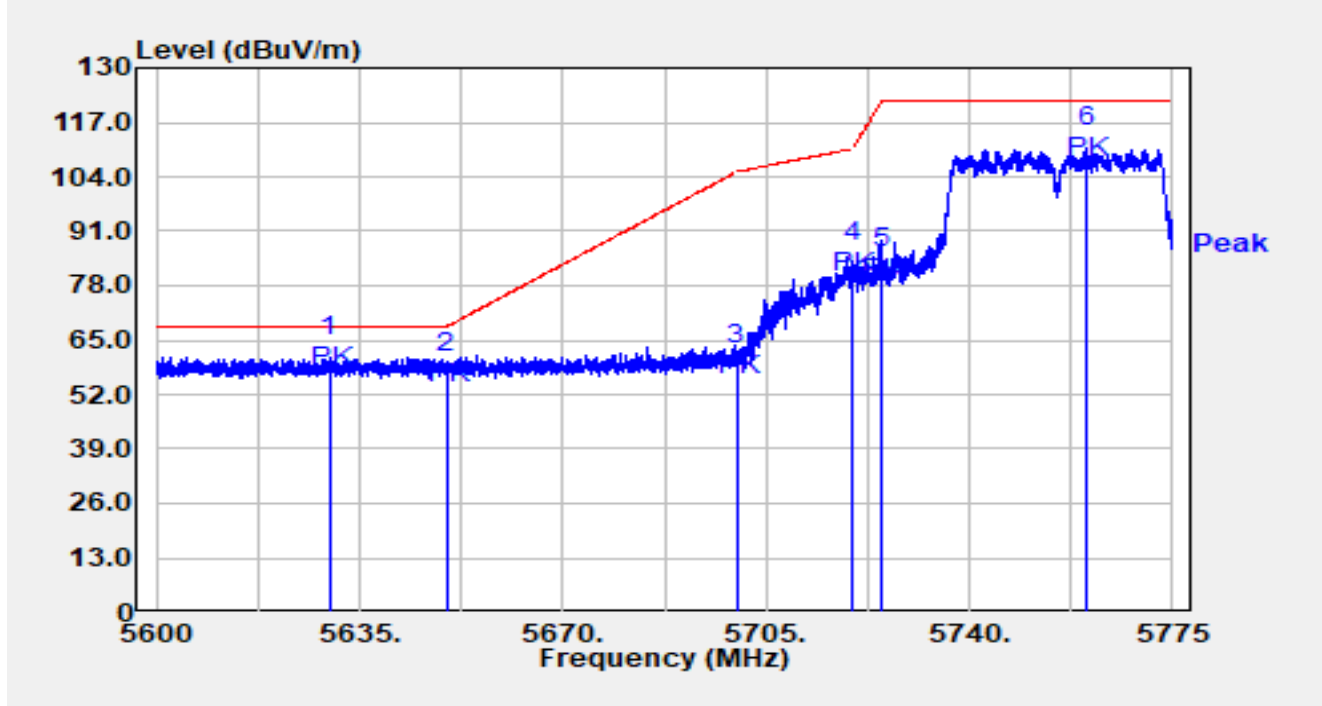


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5629.785	44.35	16.55	60.90	-7.30	68.20	Peak
2		5650.000	40.45	16.65	57.11	-11.09	68.20	Peak
3		5700.000	42.10	16.81	58.91	-46.29	105.20	Peak
4		5720.000	66.94	16.90	83.84	-26.96	110.80	Peak
5		5725.000	65.48	16.92	82.41	-39.79	122.20	Peak
6		5760.283	93.94	17.04	110.99	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5795MHz		

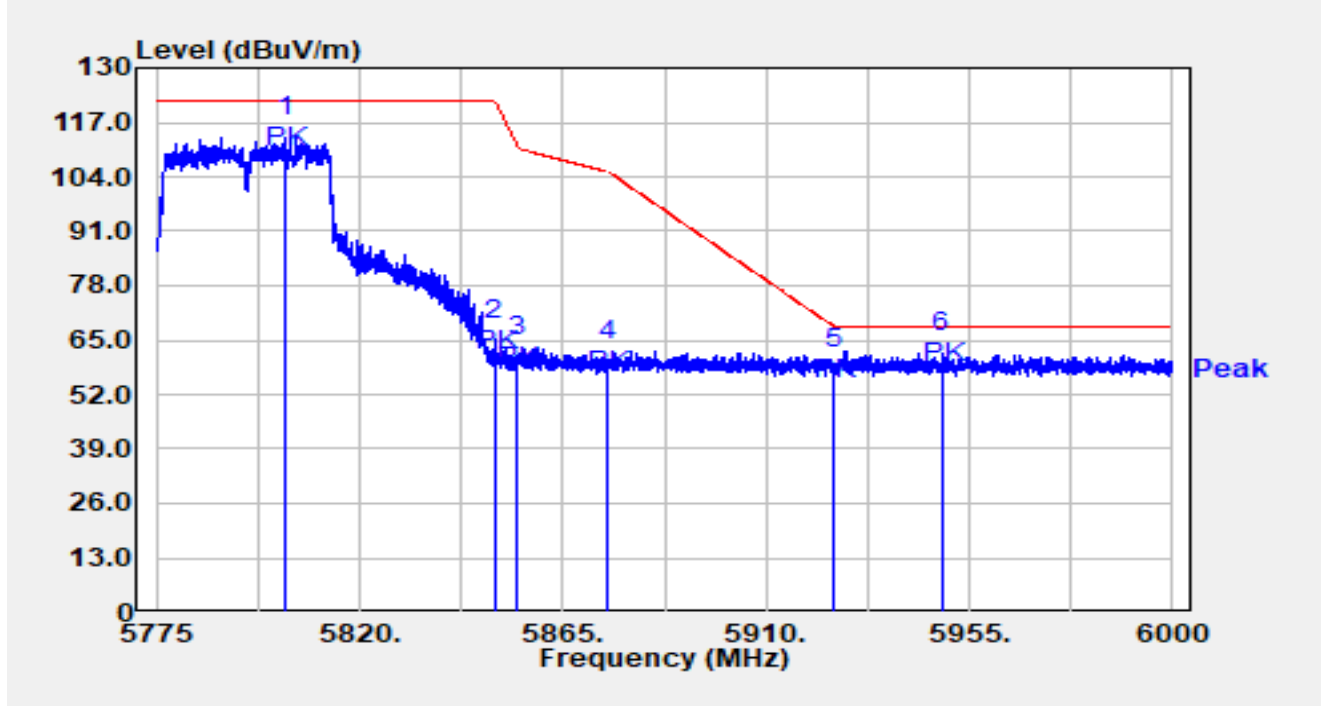


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5803.665	96.12	17.33	113.45	N/A	N/A	Peak
2		5850.000	47.45	17.31	64.76	-57.44	122.20	Peak
3		5855.000	43.71	17.32	61.03	-49.77	110.80	Peak
4		5875.000	42.73	17.38	60.11	-45.09	105.20	Peak
5		5925.000	40.86	17.36	58.23	-9.97	68.20	Peak
6	*	5948.880	44.48	17.45	61.93	-6.27	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5795MHz		

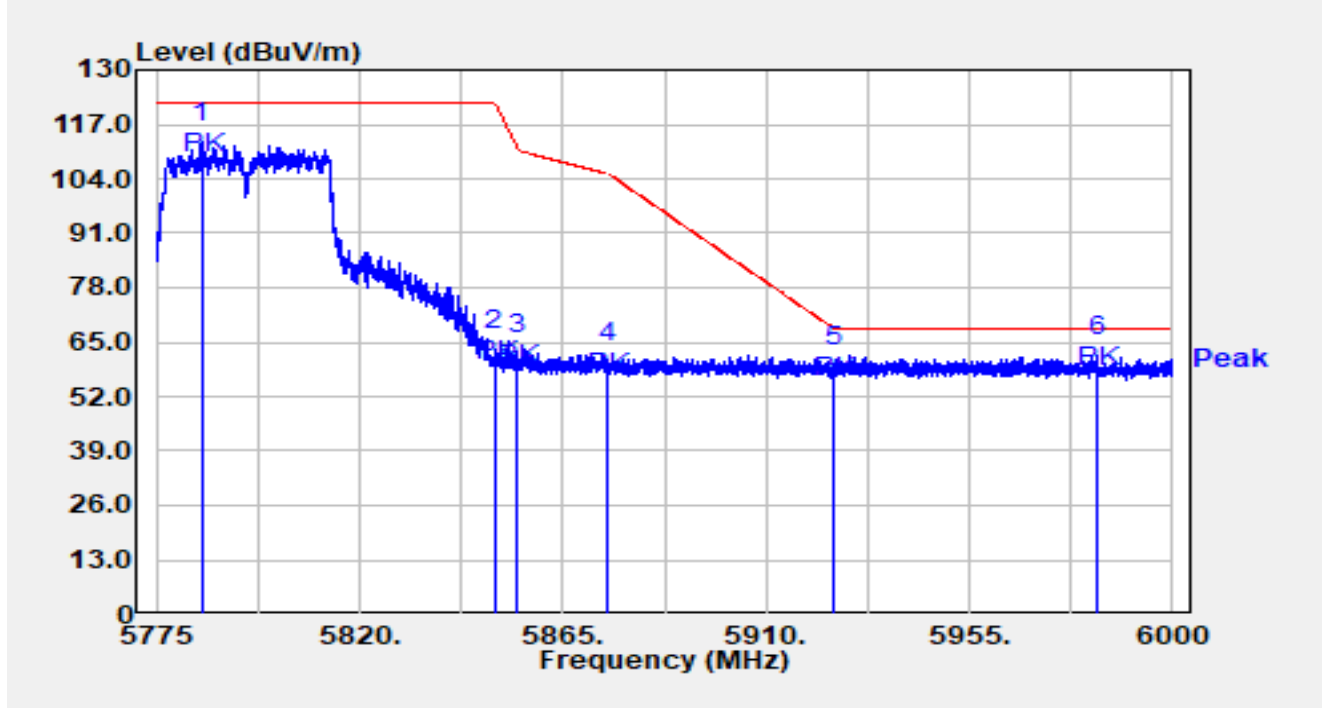


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5784.967	95.42	17.22	112.64	N/A	N/A	Peak
2		5850.000	45.49	17.31	62.80	-59.40	122.20	Peak
3		5855.000	44.67	17.32	62.00	-48.80	110.80	Peak
4		5875.000	42.52	17.38	59.90	-45.30	105.20	Peak
5		5925.000	41.89	17.36	59.25	-8.95	68.20	Peak
6	*	5983.305	44.12	17.56	61.67	-6.53	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

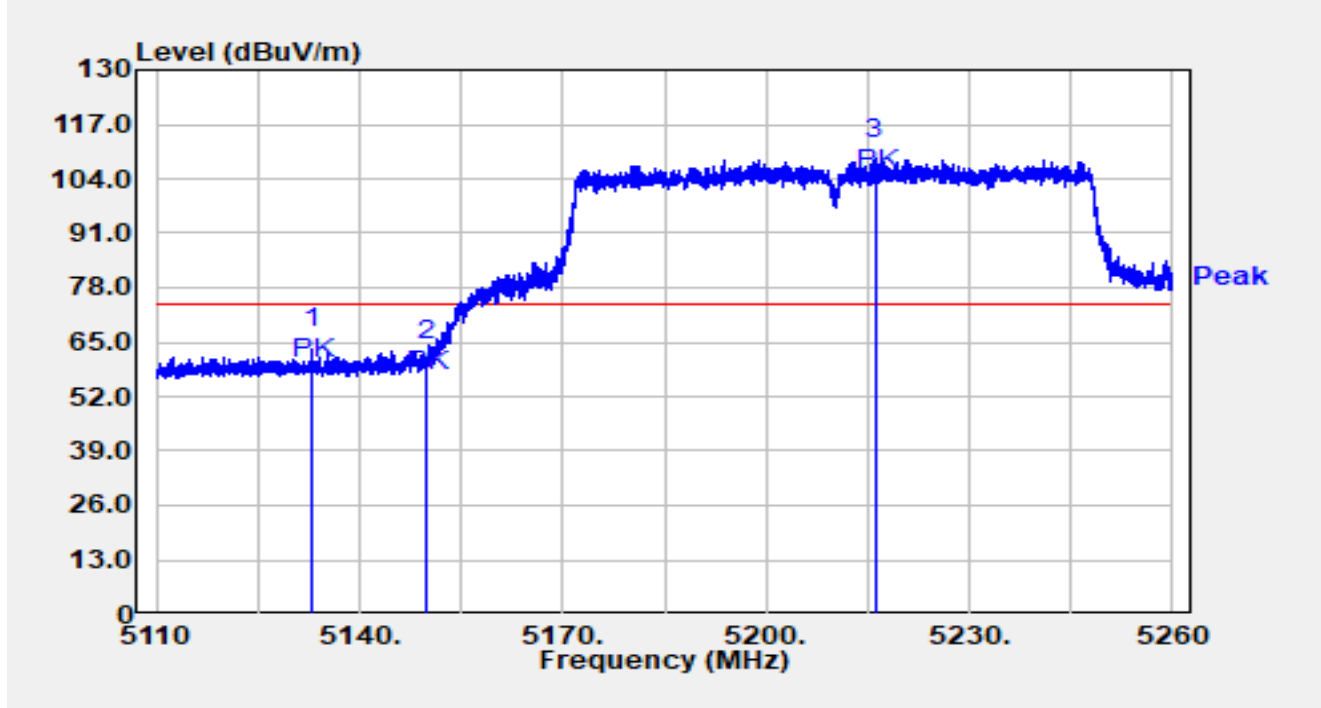


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5133.040	47.51	15.96	63.48	-10.52	74.00	Peak
2		5150.000	44.52	16.00	60.52	-13.48	74.00	Peak
3		5216.170	92.82	15.85	108.66	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

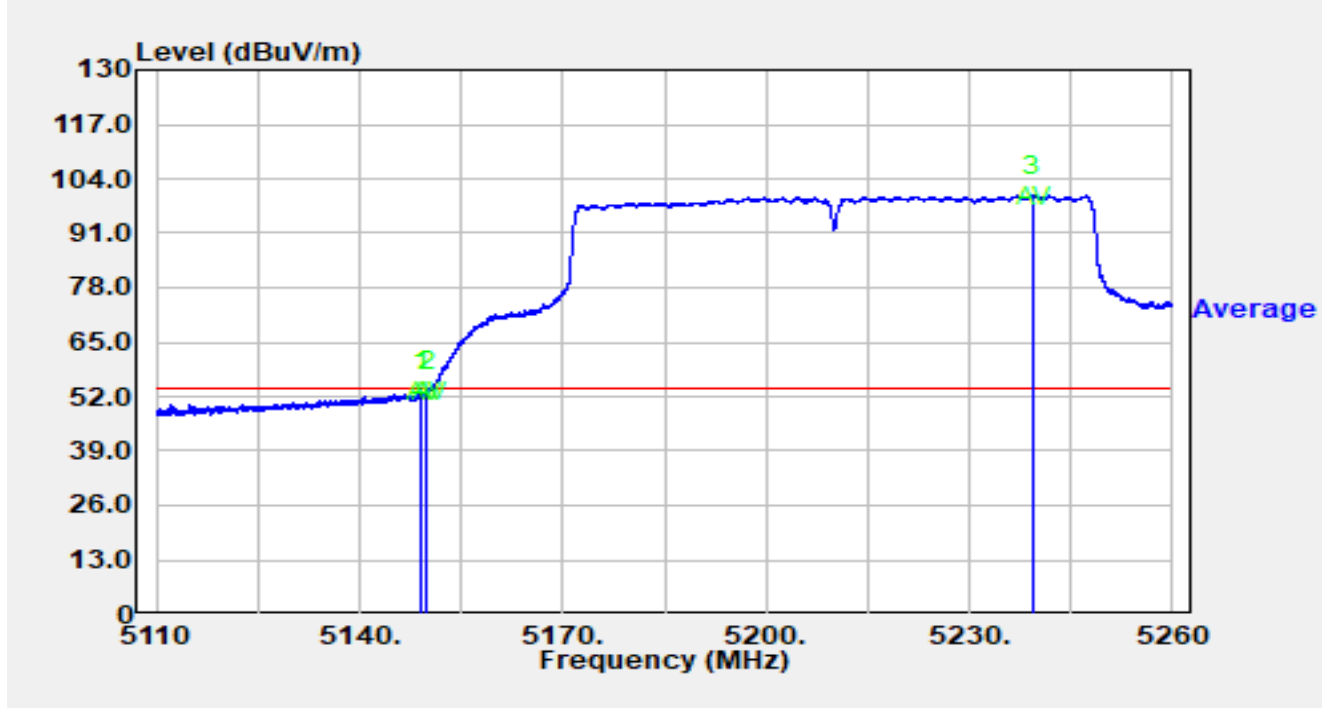


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5149.210	37.03	16.00	53.02	-0.98	54.00	Average
2	*	5150.000	37.16	16.00	53.15	-0.85	54.00	Average
3		5239.390	84.10	15.97	100.07	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

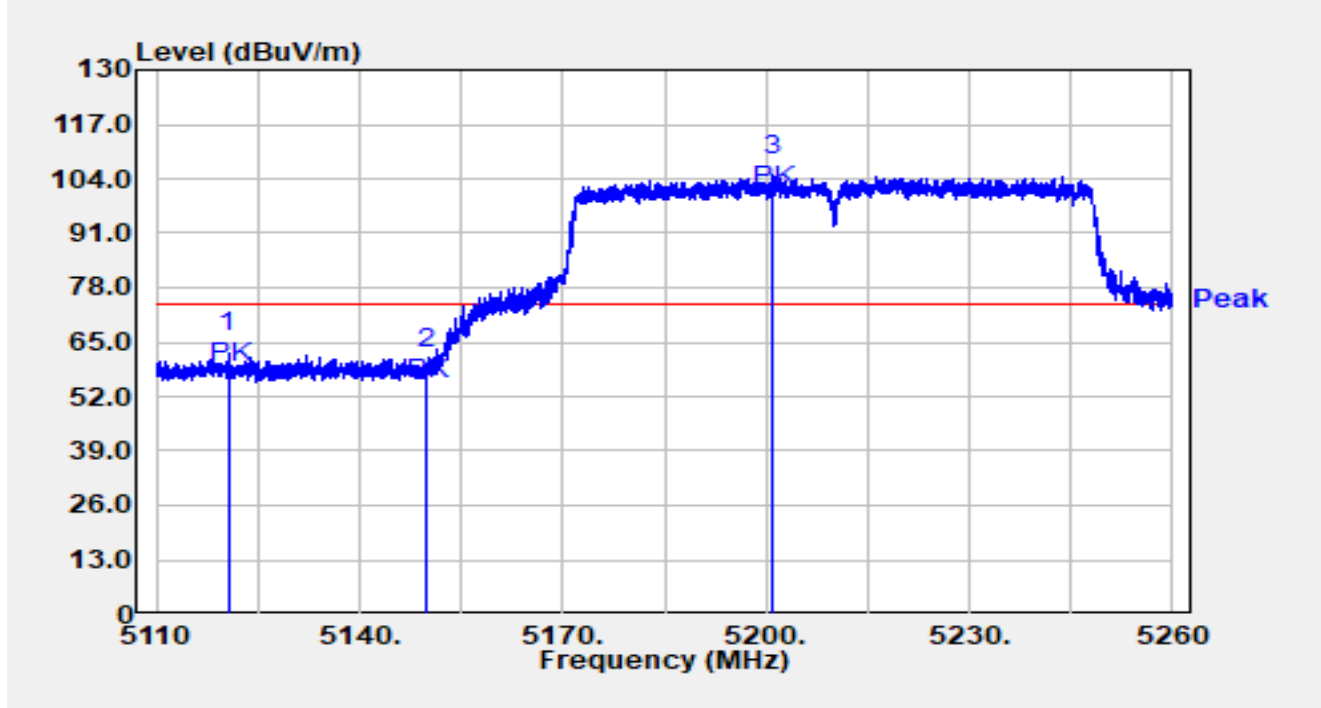


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5120.635	46.31	16.08	62.39	-11.61	74.00	Peak
2		5150.000	42.49	16.00	58.48	-15.52	74.00	Peak
3		5200.945	88.81	15.96	104.77	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

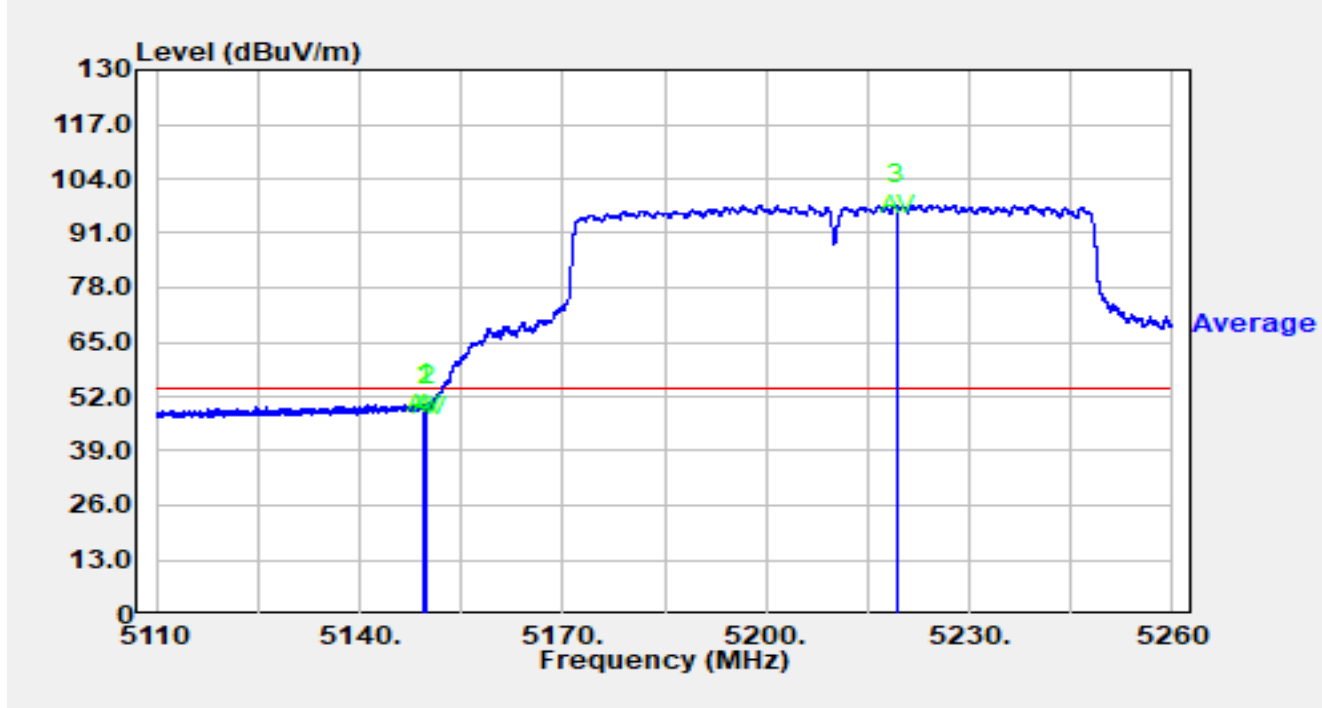


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.495	34.07	16.00	50.07	-3.93	54.00	Average
2		5150.000	33.97	16.00	49.96	-4.04	54.00	Average
3		5219.305	81.79	15.86	97.65	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

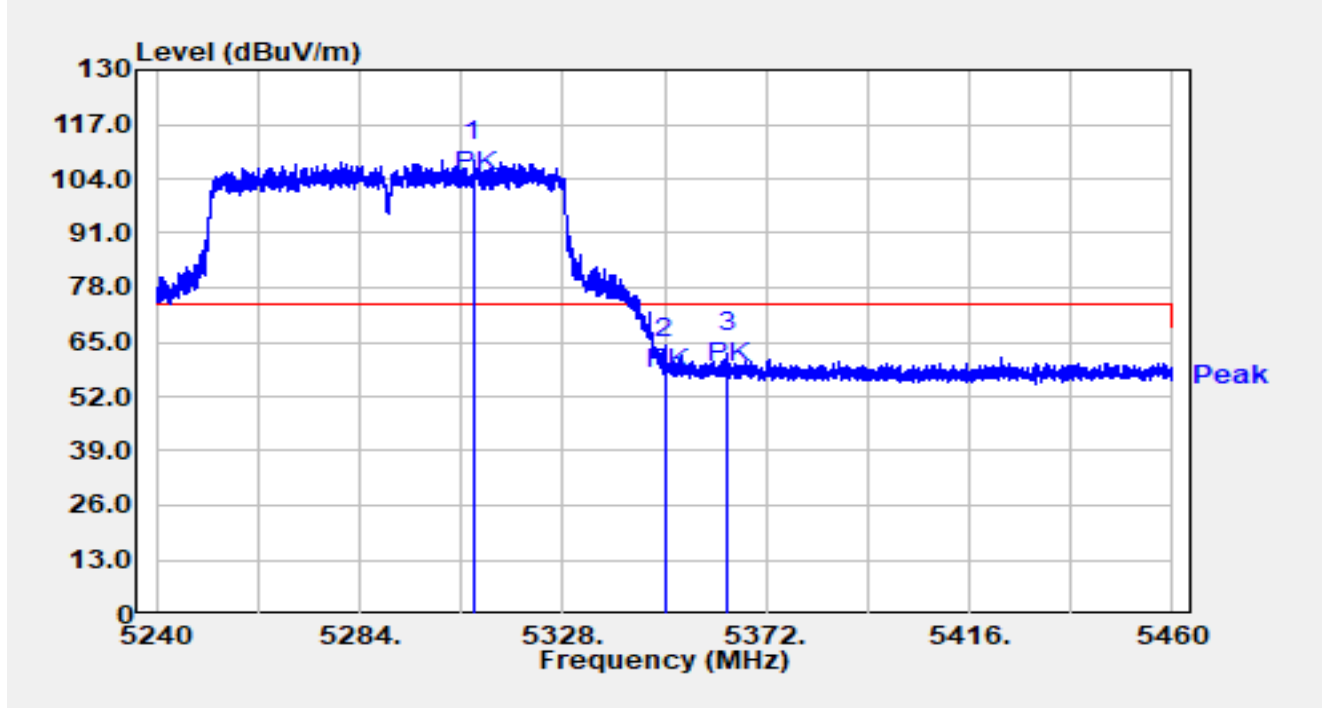


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5308.728	92.52	15.77	108.29	N/A	N/A	Peak
2		5350.000	45.63	15.68	61.31	-12.69	74.00	Peak
3	*	5363.706	46.83	15.63	62.47	-11.53	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

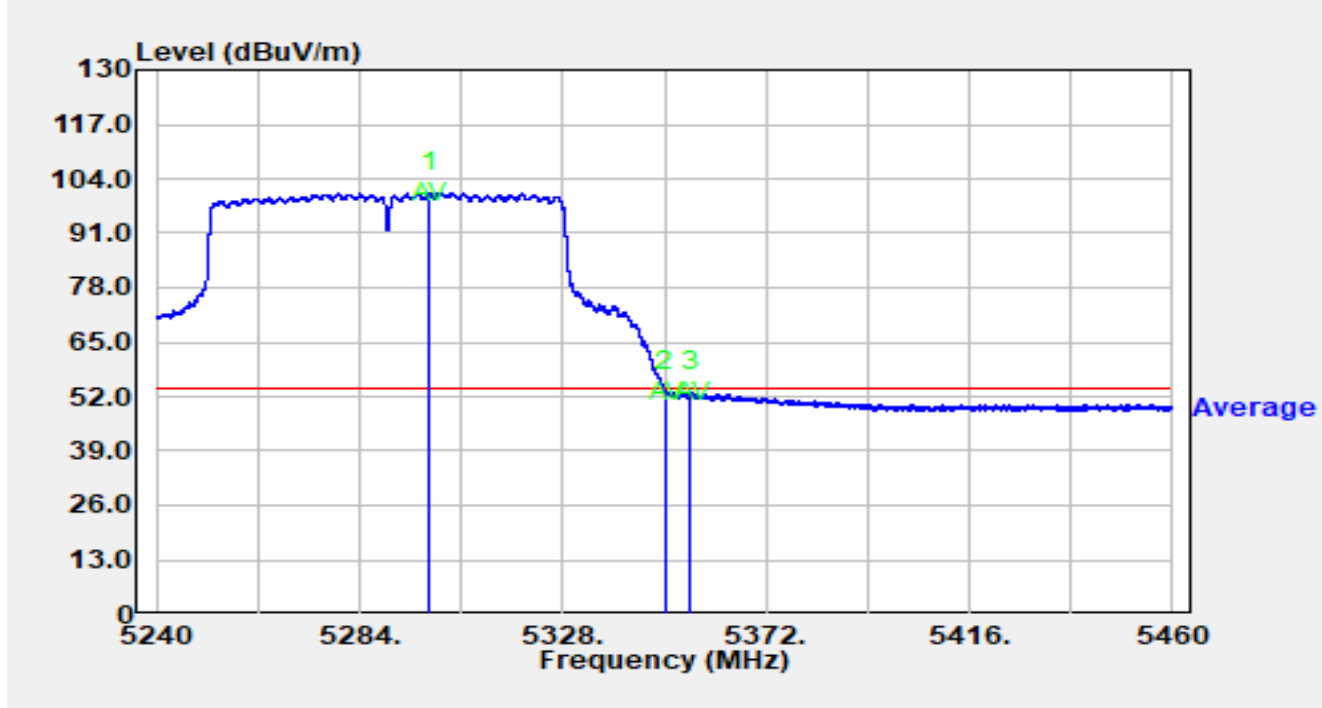


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5299.004	85.01	15.77	100.77	N/A	N/A	Average
2	*	5350.000	37.40	15.68	53.08	-0.92	54.00	Average
3		5355.654	37.36	15.66	53.03	-0.97	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

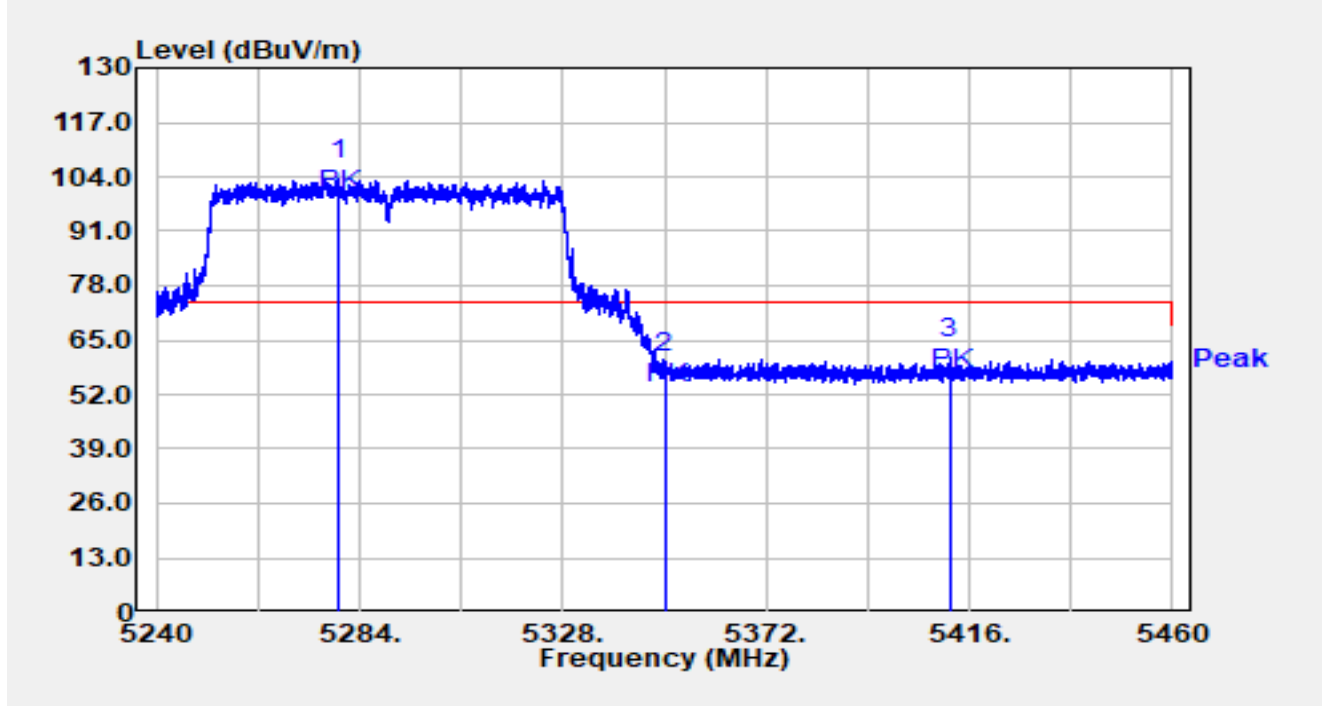


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5279.490	87.68	15.80	103.48	N/A	N/A	Peak
2		5350.000	41.46	15.68	57.14	-16.86	74.00	Peak
3	*	5411.908	44.96	15.79	60.75	-13.25	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

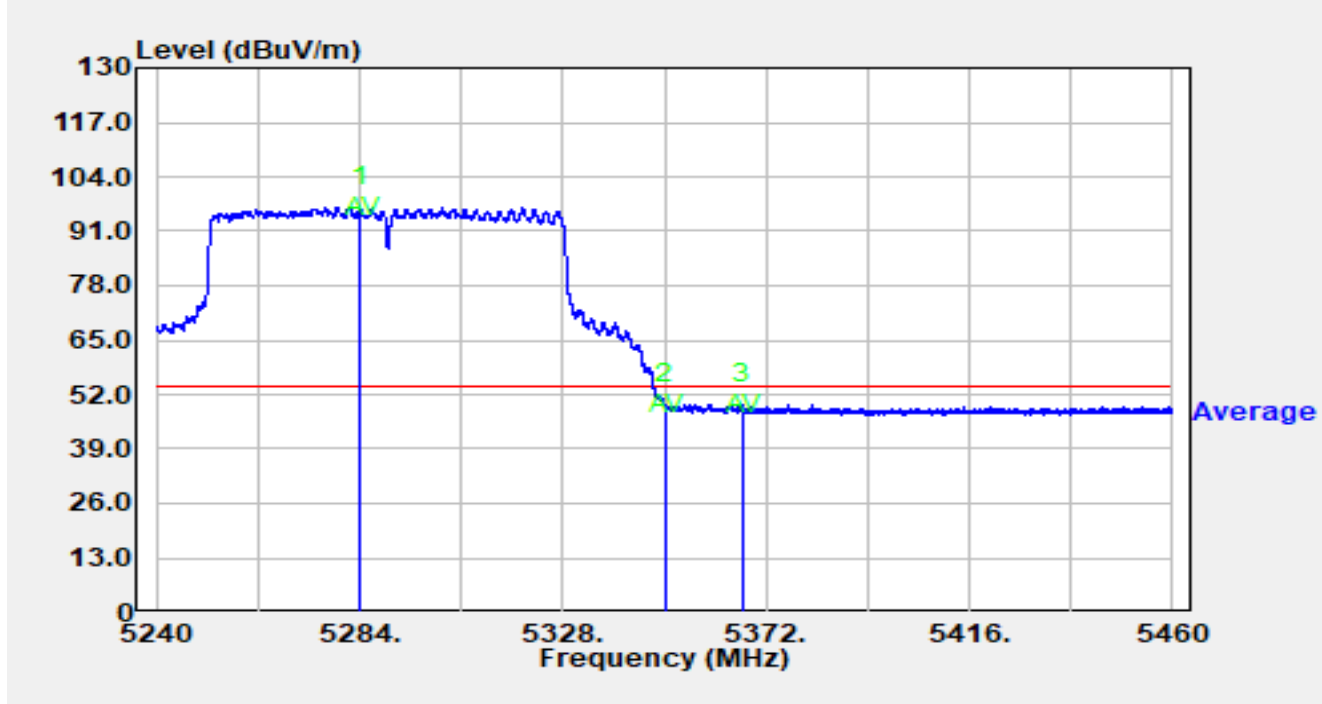


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5284.242	80.91	15.78	96.69	N/A	N/A	Average
2	*	5350.000	33.98	15.68	49.66	-4.34	54.00	Average
3		5366.896	33.98	15.62	49.61	-4.39	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

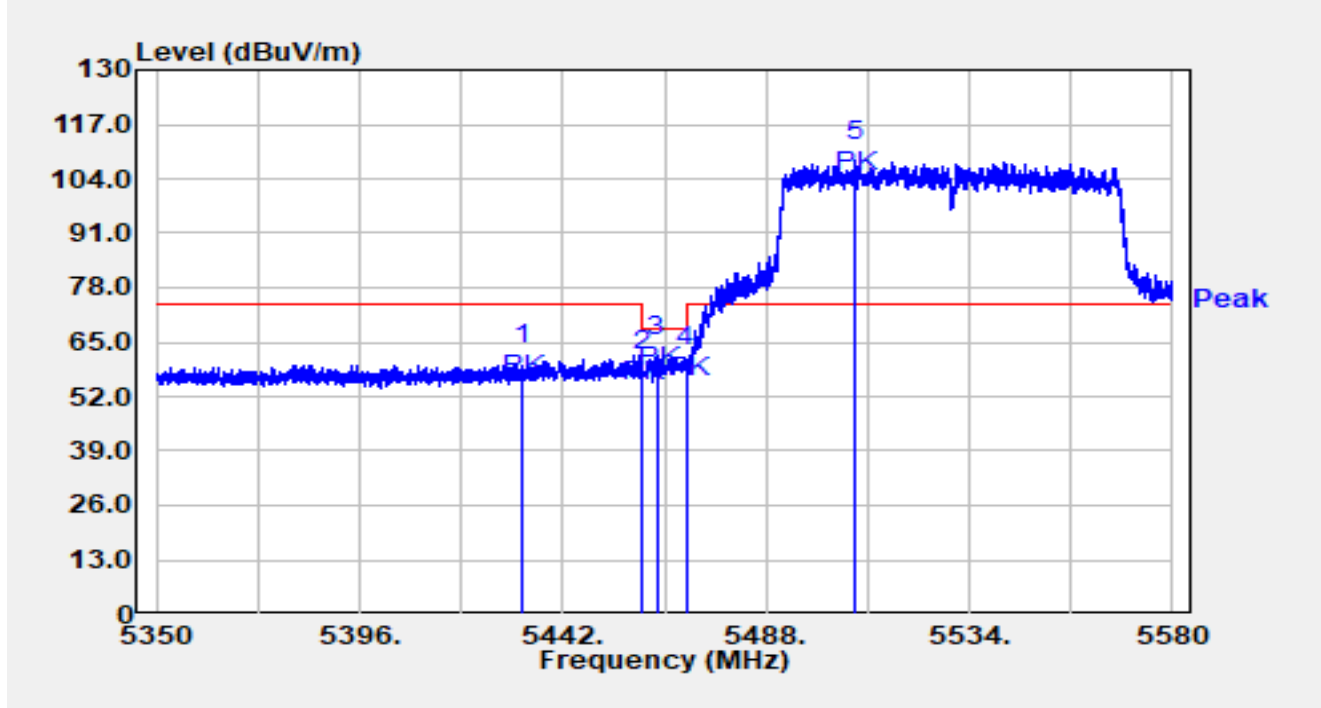


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5432.800	43.74	15.85	59.59	-14.41	74.00	Peak
2		5460.000	41.95	16.02	57.97	-10.23	68.20	Peak
3	*	5463.229	45.60	16.01	61.61	-6.59	68.20	Peak
4		5470.000	42.90	15.98	58.88	-9.32	68.20	Peak
5		5508.217	92.03	16.22	108.25	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

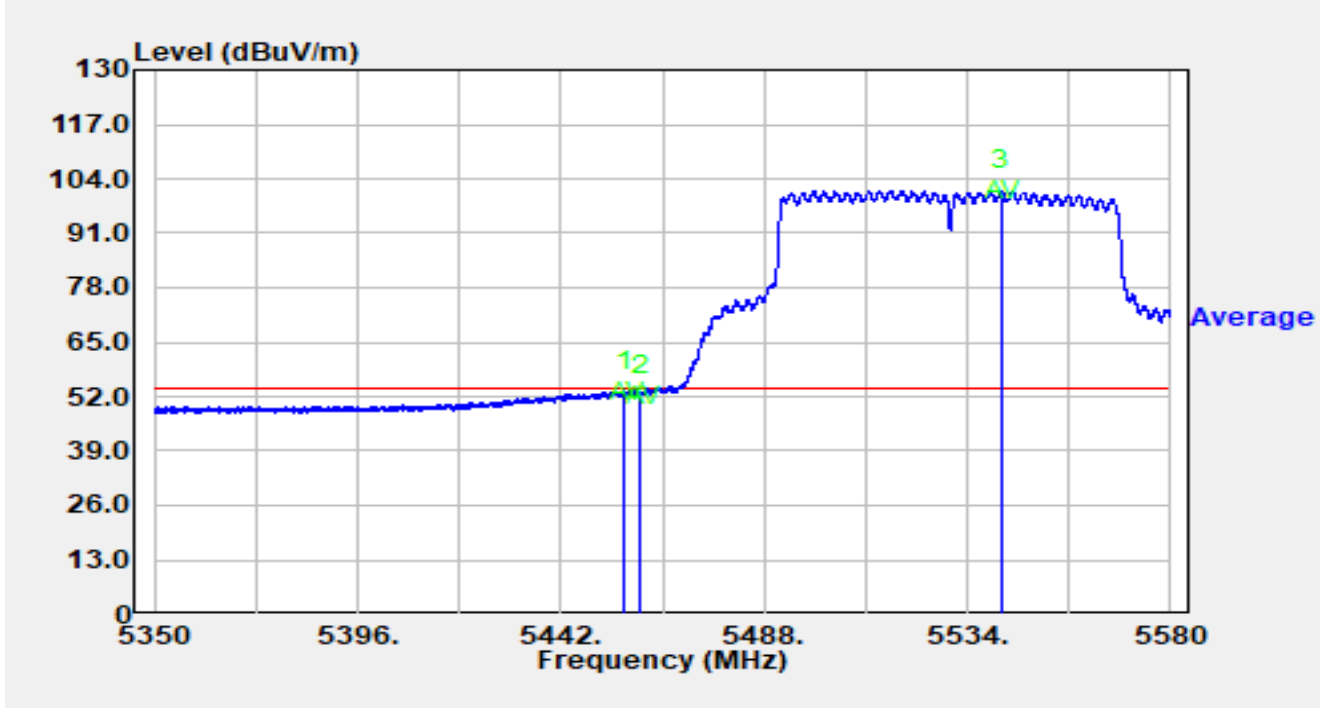


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5456.559	37.43	16.04	53.47	-0.53	54.00	Average
2		5460.000	36.40	16.02	52.42	-1.58	54.00	Average
3		5541.705	85.09	16.18	101.27	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

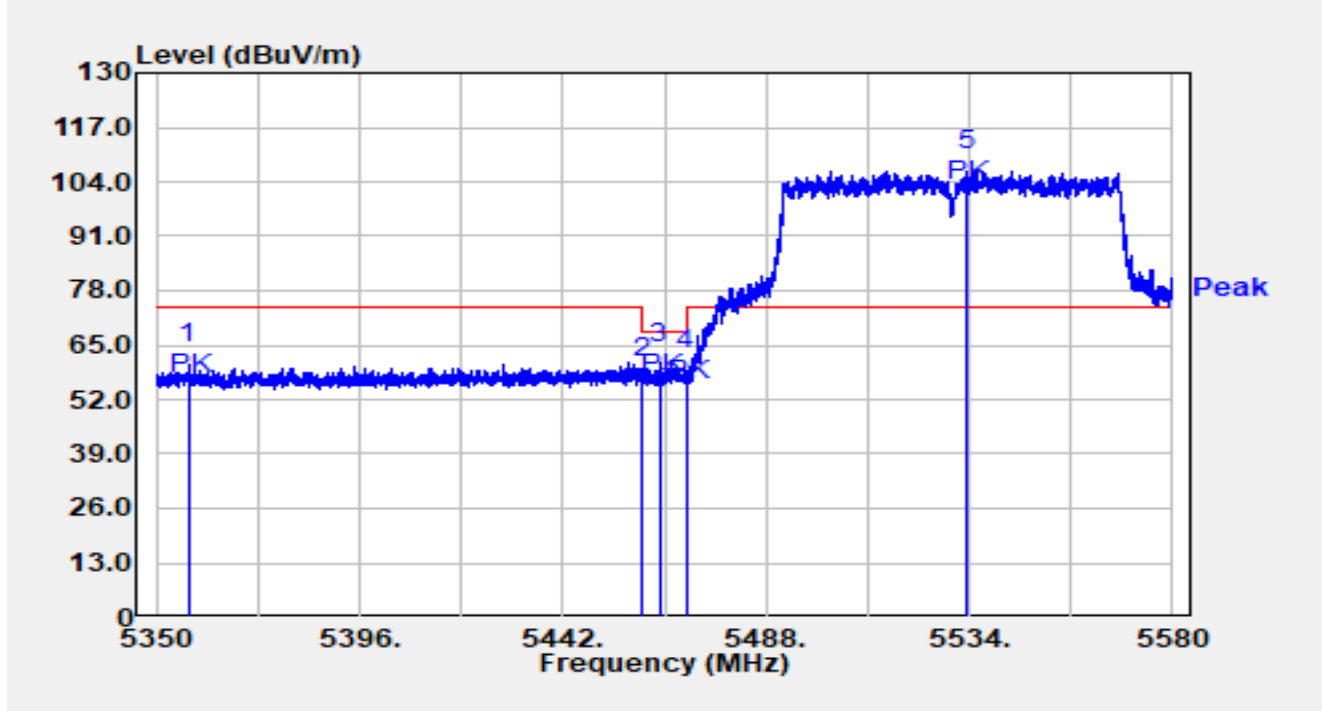


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5357.291	44.86	15.66	60.52	-13.48	74.00	Peak
2		5460.000	41.29	16.02	57.31	-10.89	68.20	Peak
3	*	5463.988	44.68	16.01	60.69	-7.51	68.20	Peak
4		5470.000	43.09	15.98	59.07	-9.13	68.20	Peak
5		5533.471	90.52	16.16	106.68	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

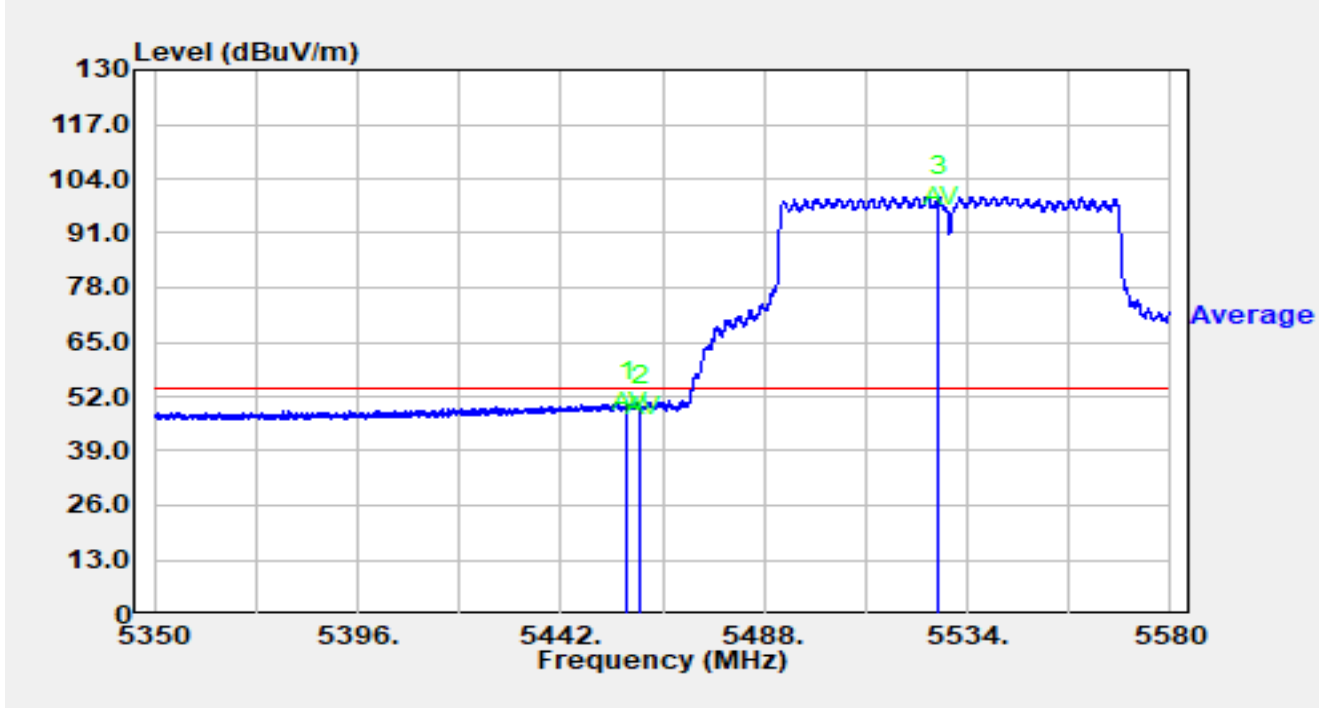


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.134	34.56	16.03	50.59	-3.41	54.00	Average
2		5460.009	33.92	16.02	49.94	-4.06	54.00	Average
3		5527.629	83.62	16.16	99.78	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5610MHz		

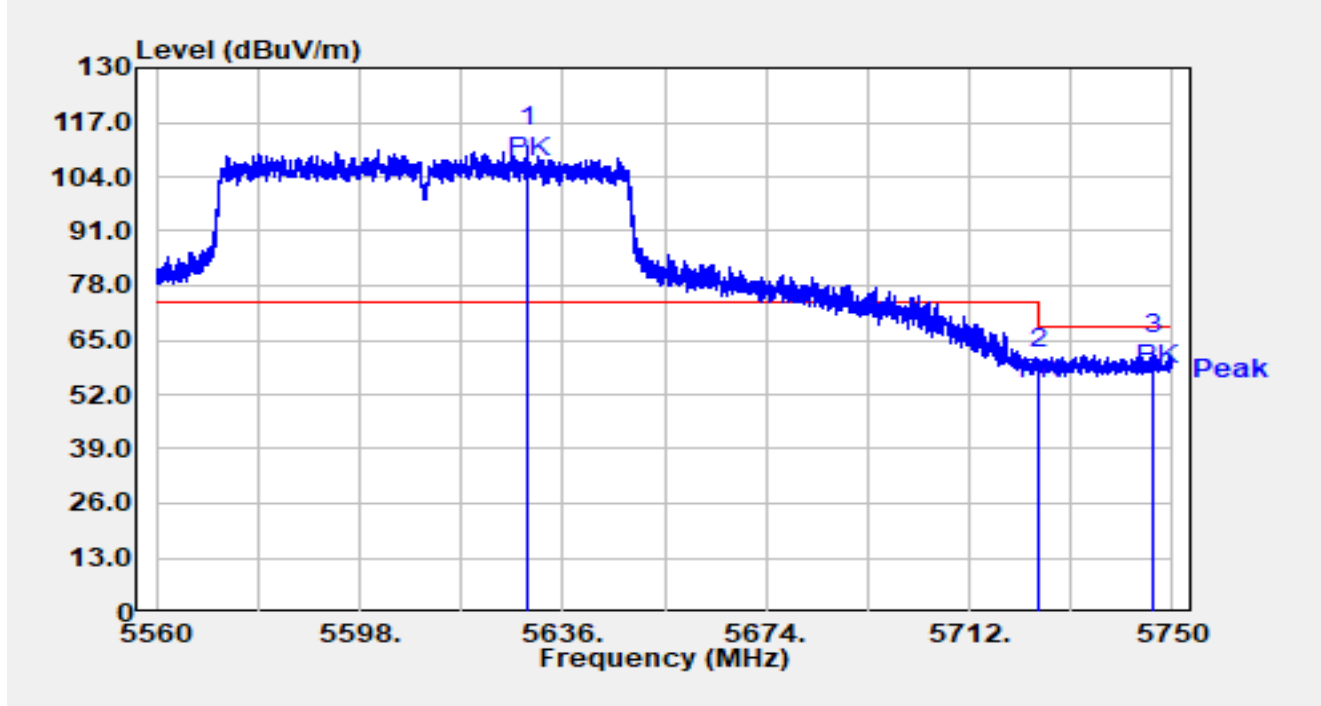


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5629.388	94.79	16.55	111.33	N/A	N/A	Peak
2		5725.000	41.14	16.92	58.06	-10.14	68.20	Peak
3	*	5746.580	44.69	16.97	61.66	-6.54	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5610MHz		

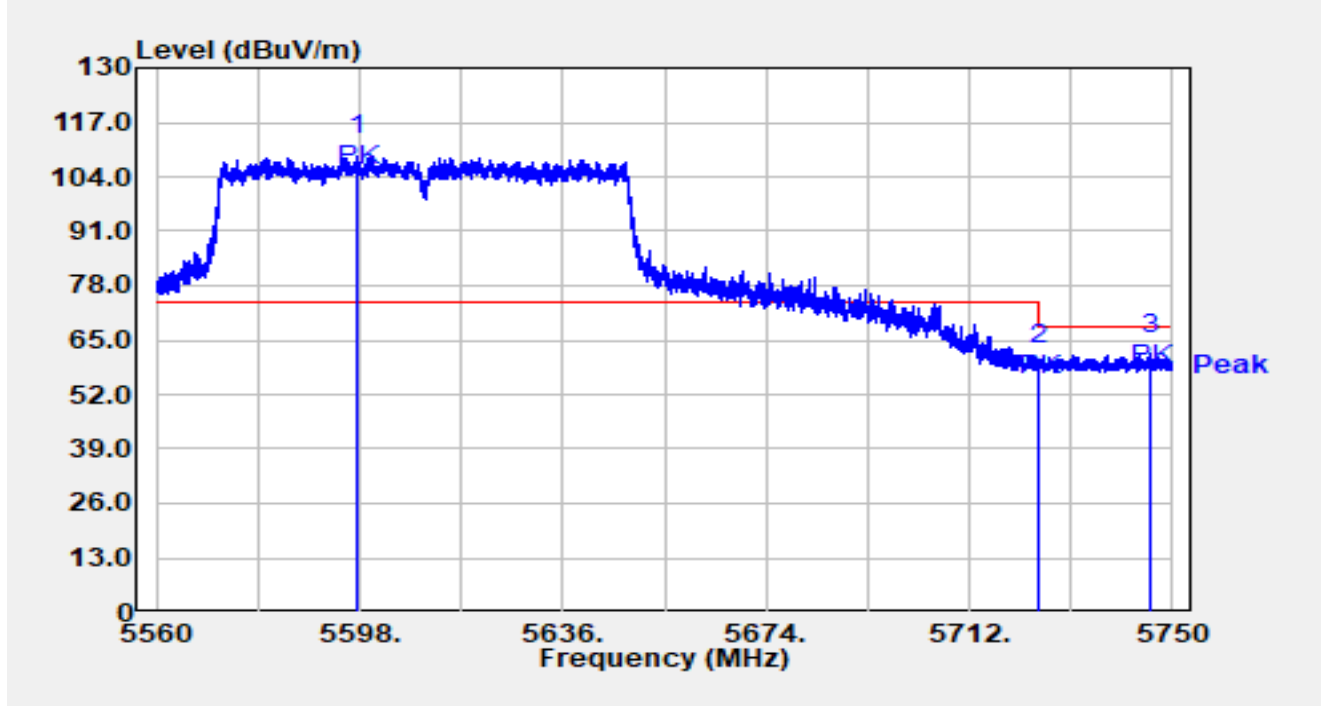


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5597.620	92.65	16.43	109.08	N/A	N/A	Peak
2		5725.000	42.07	16.92	58.99	-9.21	68.20	Peak
3	*	5745.896	44.73	16.97	61.70	-6.50	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5775MHz		

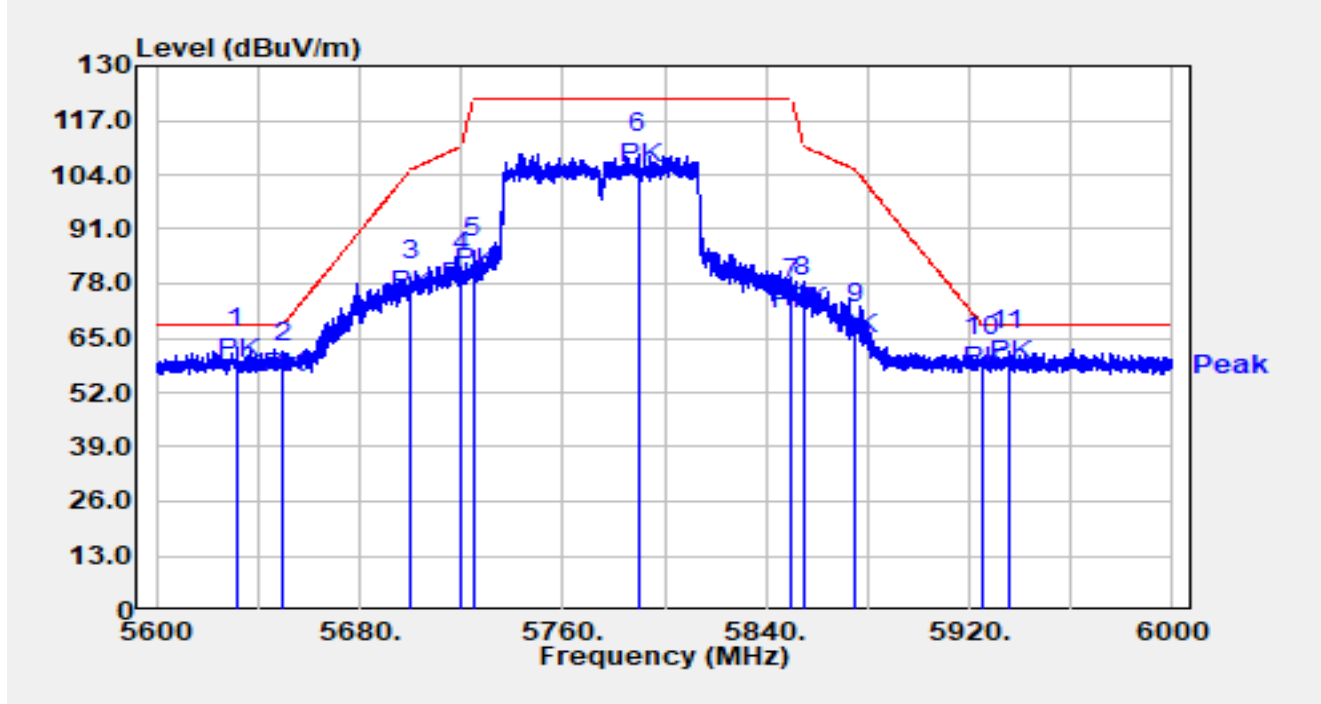

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5631.720	46.05	16.56	62.61	-5.59	68.20	Peak
2		5650.000	42.52	16.65	59.17	-9.03	68.20	Peak
3		5700.000	61.98	16.81	78.79	-26.41	105.20	Peak
4		5720.000	63.80	16.90	80.71	-30.09	110.80	Peak
5		5725.000	67.13	16.92	84.06	-38.14	122.20	Peak
6		5789.960	91.88	17.25	109.13	N/A	N/A	Peak
7		5850.000	56.82	17.31	74.14	-48.06	122.20	Peak
8		5855.000	57.52	17.32	74.84	-35.96	110.80	Peak
9		5875.000	50.95	17.38	68.33	-36.87	105.20	Peak
10		5925.000	43.03	17.36	60.40	-7.80	68.20	Peak
11		5935.440	44.54	17.40	61.94	-6.26	68.20	Peak


Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dB μ V/m) = Reading (dB μ V) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5775MHz		

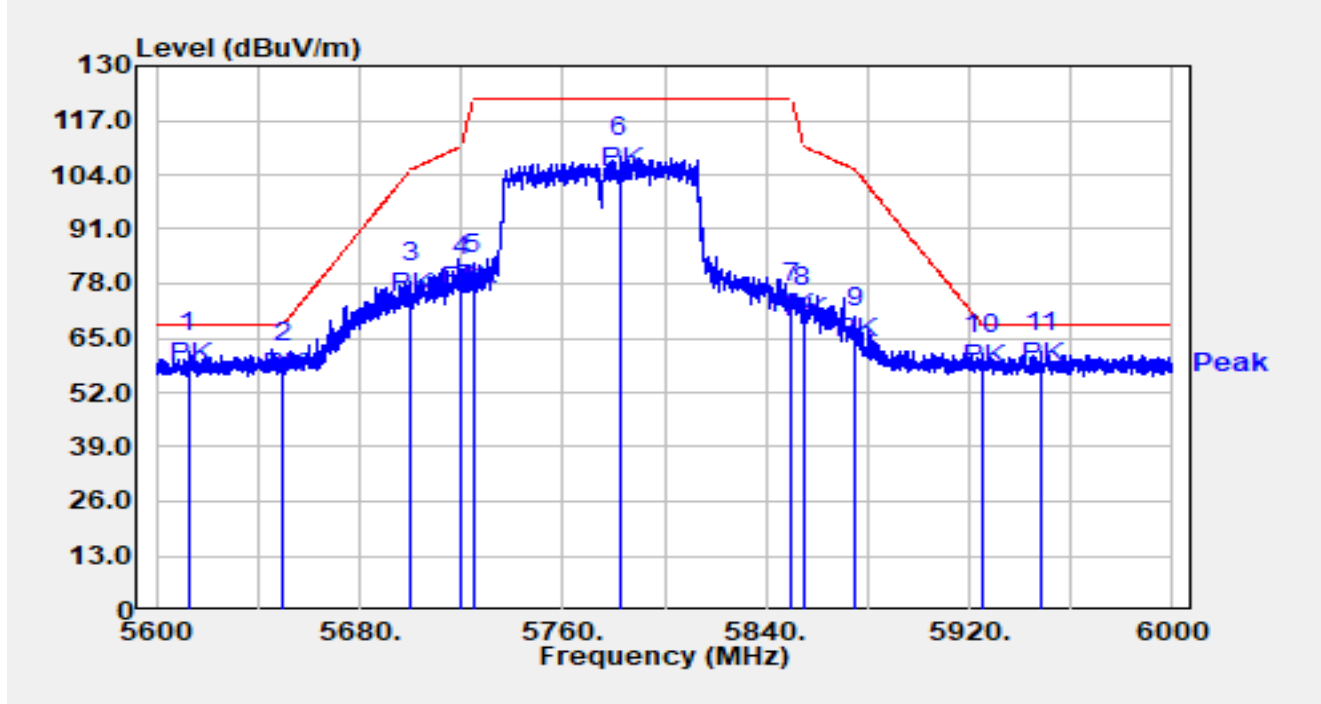

No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5612.840	45.24	16.46	61.70	-6.50	68.20	Peak
2		5650.000	42.57	16.65	59.22	-8.98	68.20	Peak
3		5700.000	61.30	16.81	78.12	-27.08	105.20	Peak
4		5720.000	62.82	16.90	79.72	-31.08	110.80	Peak
5		5725.000	63.10	16.92	80.02	-42.18	122.20	Peak
6		5782.320	91.03	17.20	108.23	N/A	N/A	Peak
7		5850.000	56.10	17.31	73.41	-48.79	122.20	Peak
8		5855.000	54.99	17.32	72.32	-38.48	110.80	Peak
9		5875.000	50.09	17.38	67.47	-37.73	105.20	Peak
10		5925.000	43.88	17.36	61.24	-6.96	68.20	Peak
11		5948.360	44.18	17.45	61.63	-6.57	68.20	Peak


Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dB μ V/m) = Reading (dB μ V) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

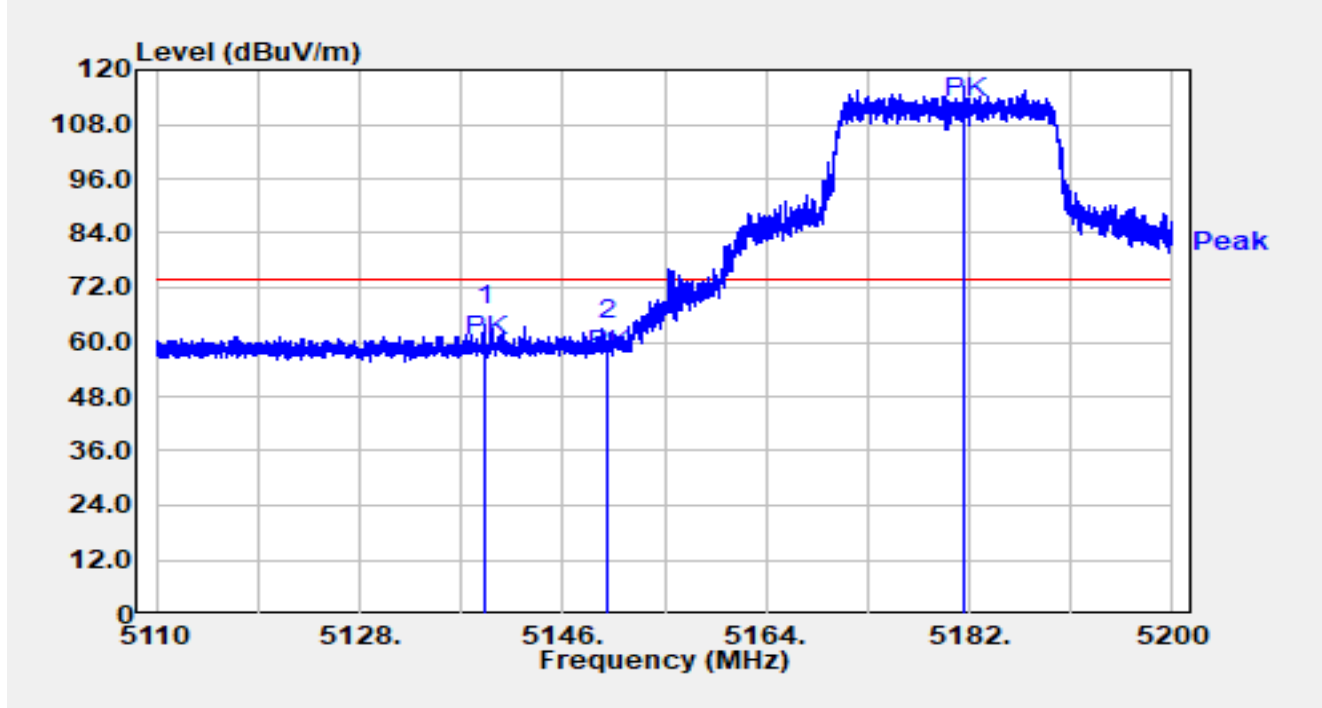


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5139.088	47.72	15.98	63.69	-10.31	74.00	Peak
2		5150.000	44.31	16.00	60.31	-13.69	74.00	Peak
3		5181.532	100.25	15.93	116.18	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

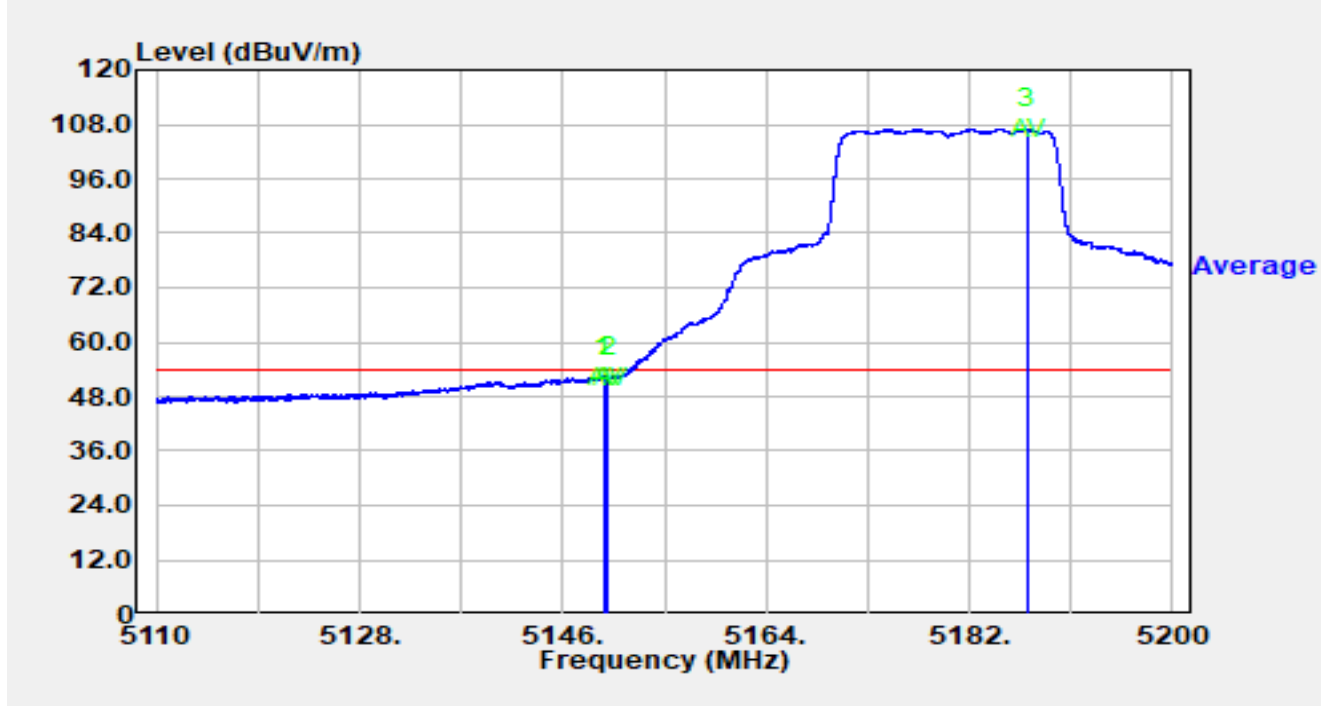


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.609	36.44	16.00	52.44	-1.56	54.00	Average
2		5150.000	36.12	16.00	52.12	-1.88	54.00	Average
3		5187.157	91.01	15.94	106.95	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

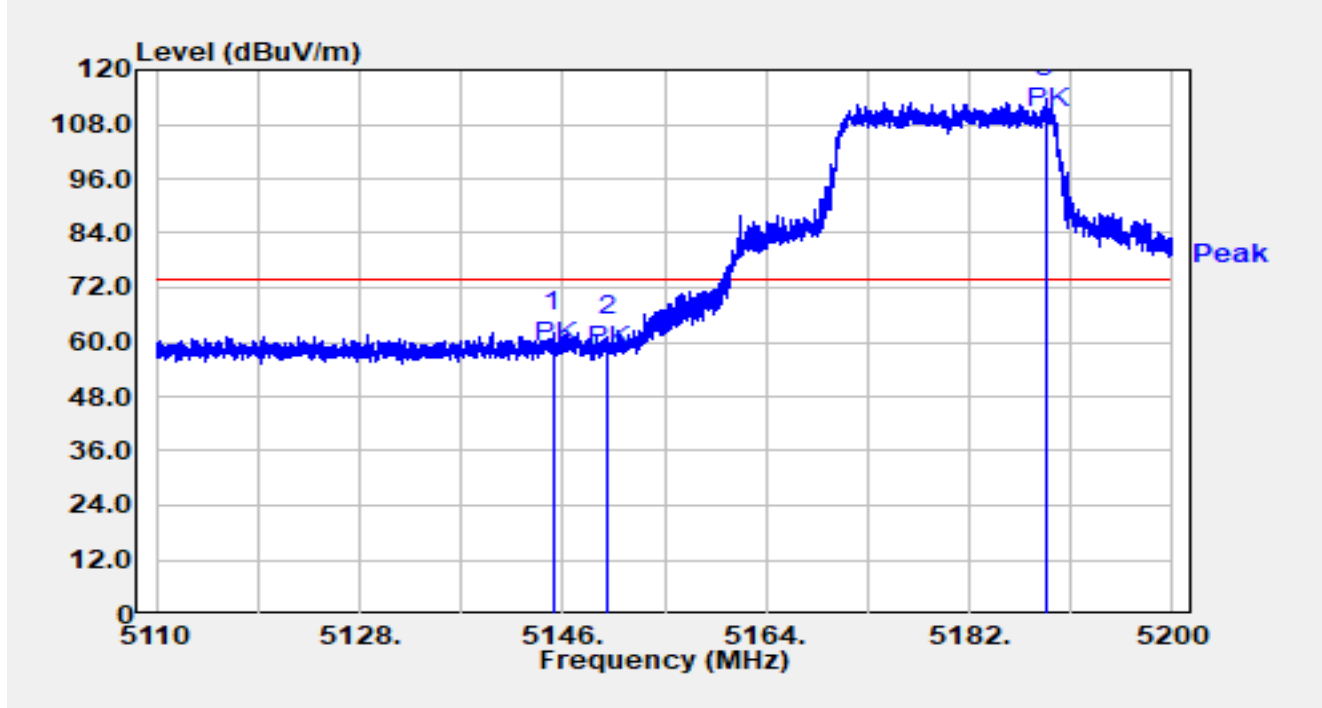


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.127	46.16	15.99	62.14	-11.86	74.00	Peak
2		5150.000	45.30	16.00	61.30	-12.70	74.00	Peak
3		5188.741	97.76	15.95	113.70	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

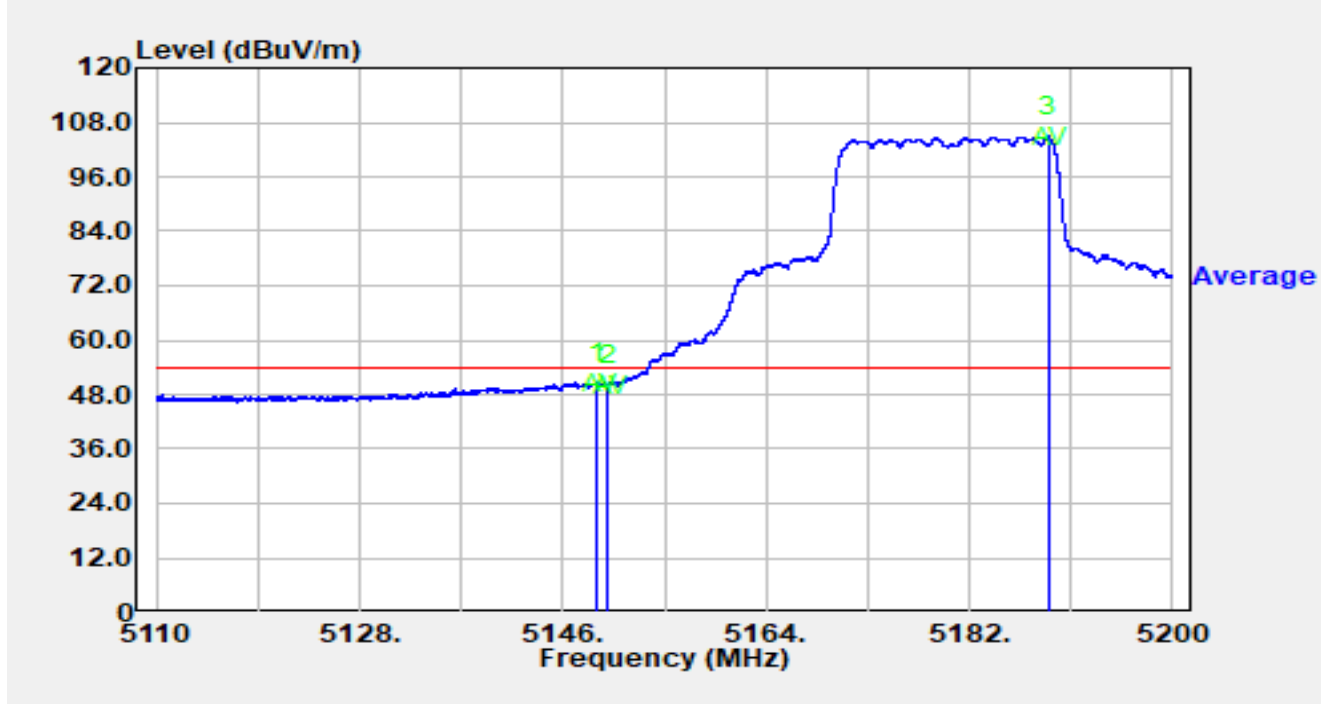


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.060	34.71	16.00	50.71	-3.29	54.00	Average
2		5150.000	34.23	16.00	50.22	-3.78	54.00	Average
3		5189.020	88.90	15.95	104.84	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

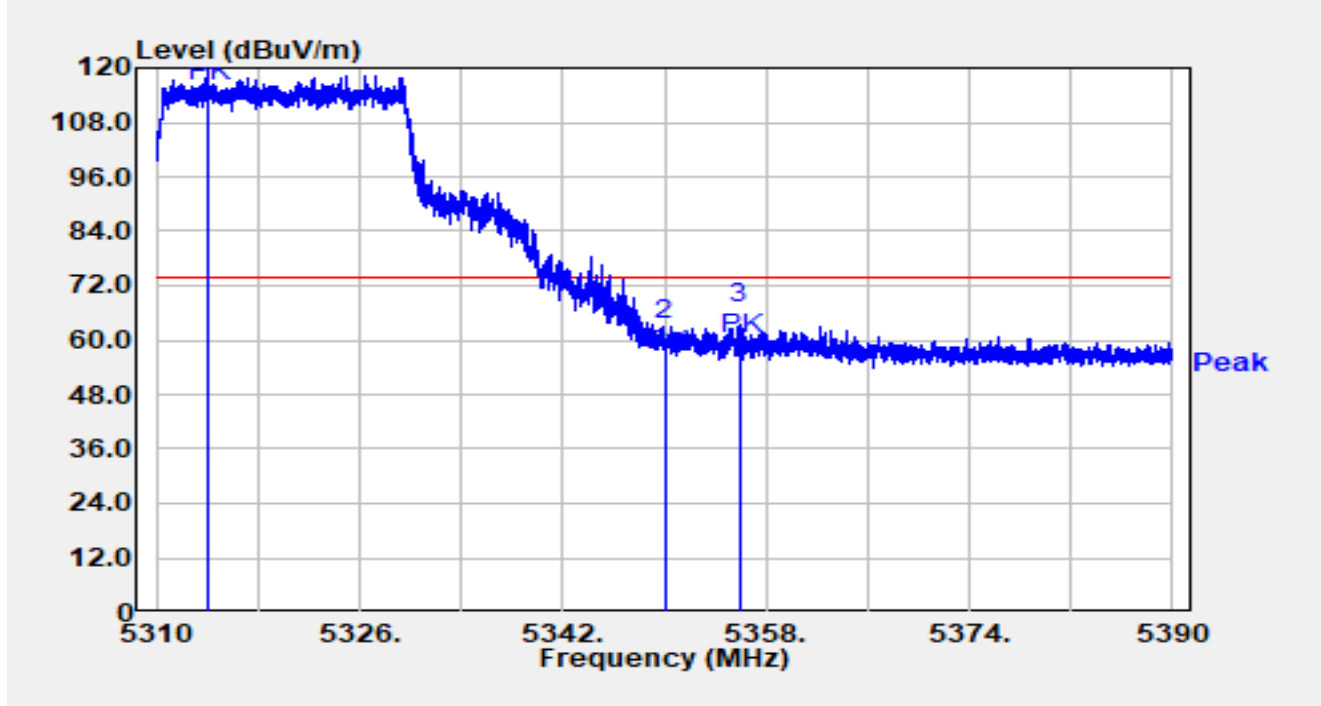


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5314.120	103.65	15.78	119.43	N/A	N/A	Peak
2		5350.000	44.13	15.68	59.81	-14.19	74.00	Peak
3	*	5355.872	47.73	15.66	63.40	-10.60	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

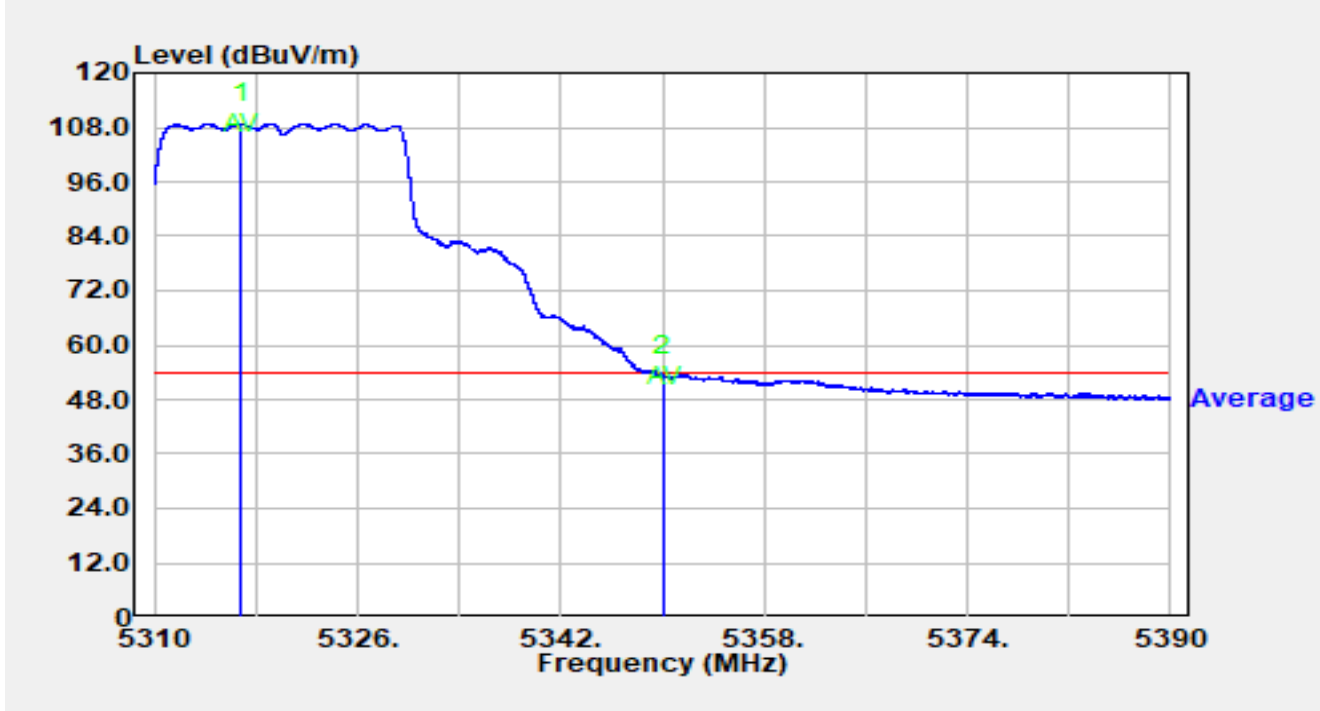


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5316.808	93.09	15.79	108.88	N/A	N/A	Average
2	*	5350.000	37.65	15.68	53.33	-0.67	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

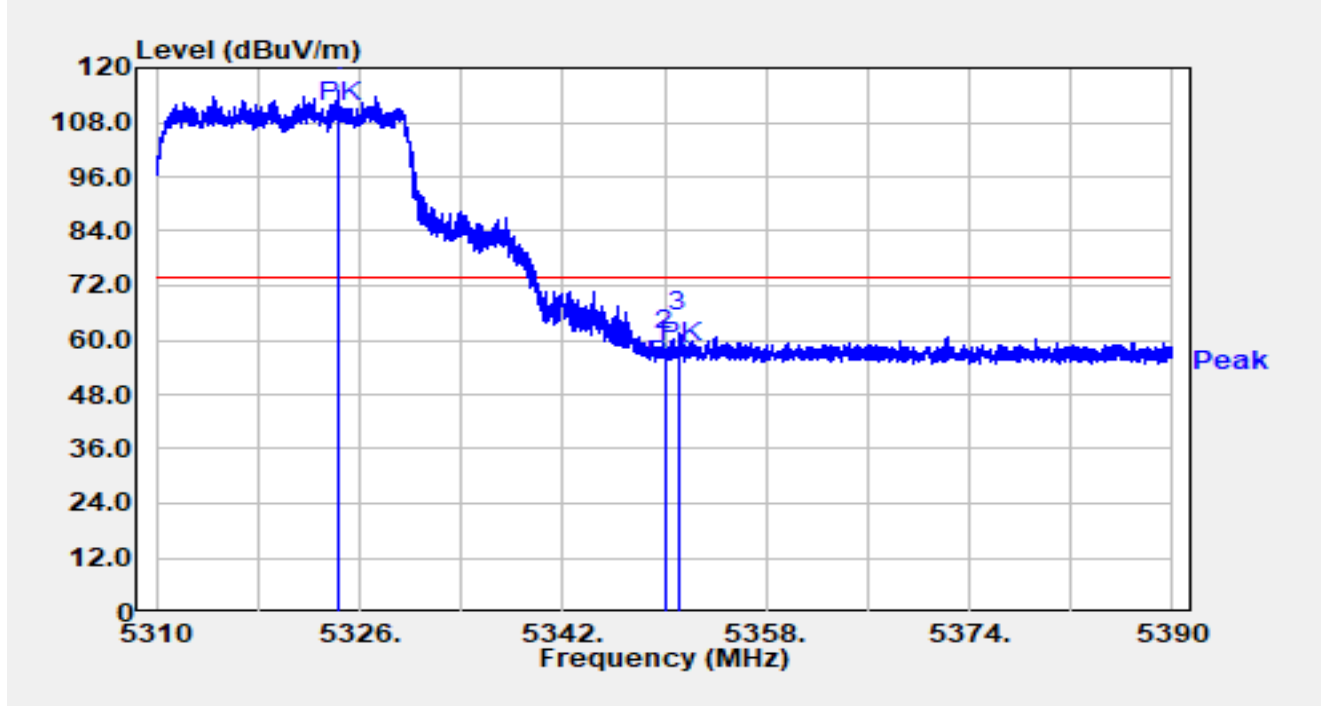


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5324.376	99.04	15.80	114.84	N/A	N/A	Peak
2		5350.000	42.24	15.68	57.92	-16.08	74.00	Peak
3	*	5351.128	45.92	15.68	61.59	-12.41	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

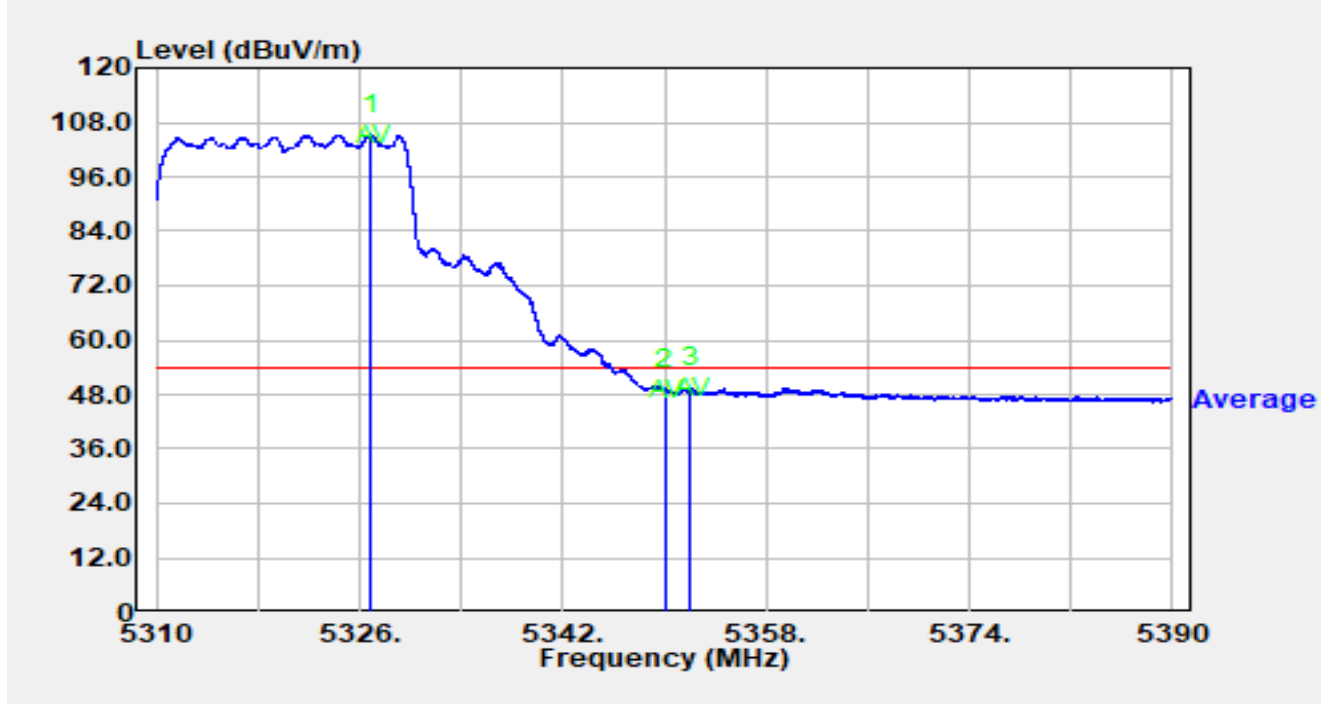


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5326.920	89.50	15.80	105.30	N/A	N/A	Average
2		5350.000	33.45	15.68	49.13	-4.87	54.00	Average
3	*	5352.064	33.91	15.68	49.58	-4.42	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

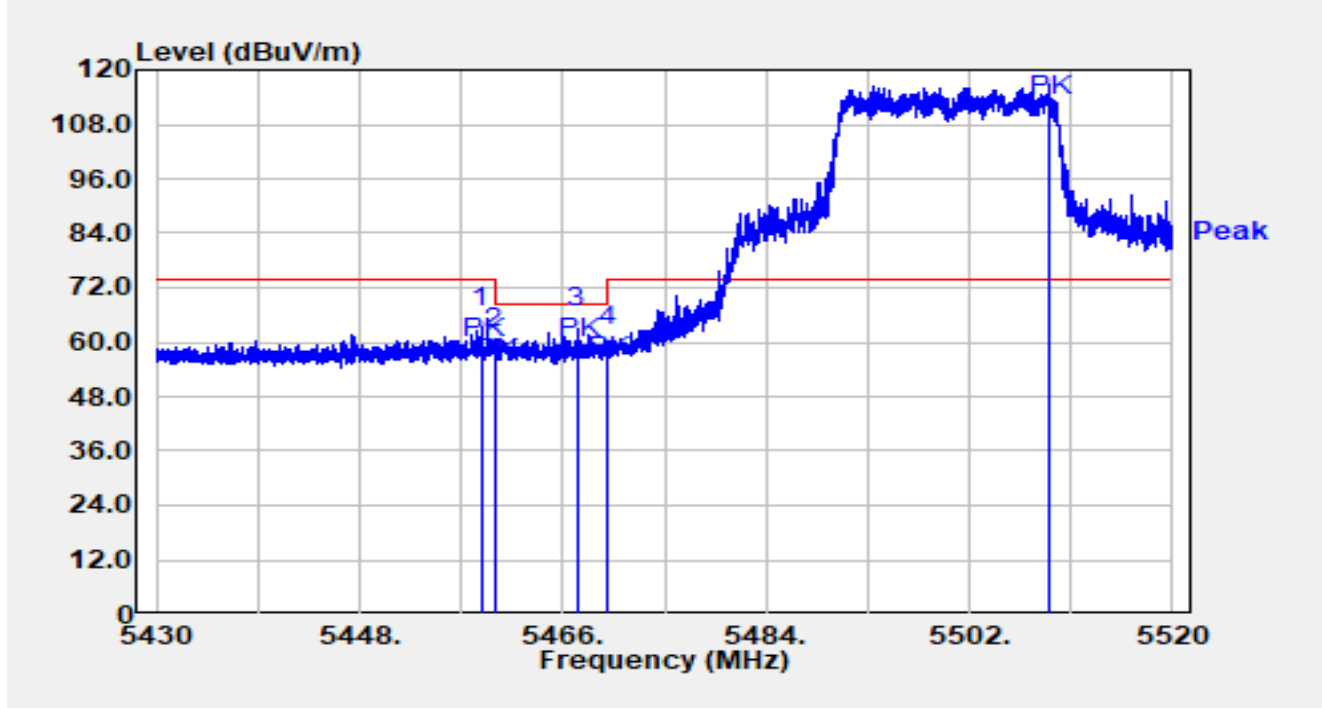


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.800	47.16	16.03	63.19	-10.81	74.00	Peak
2		5460.000	42.53	16.02	58.55	-9.65	68.20	Peak
3	*	5467.332	46.97	15.99	62.96	-5.24	68.20	Peak
4		5470.000	42.95	15.98	58.93	-9.27	68.20	Peak
5		5508.984	100.49	16.22	116.71	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

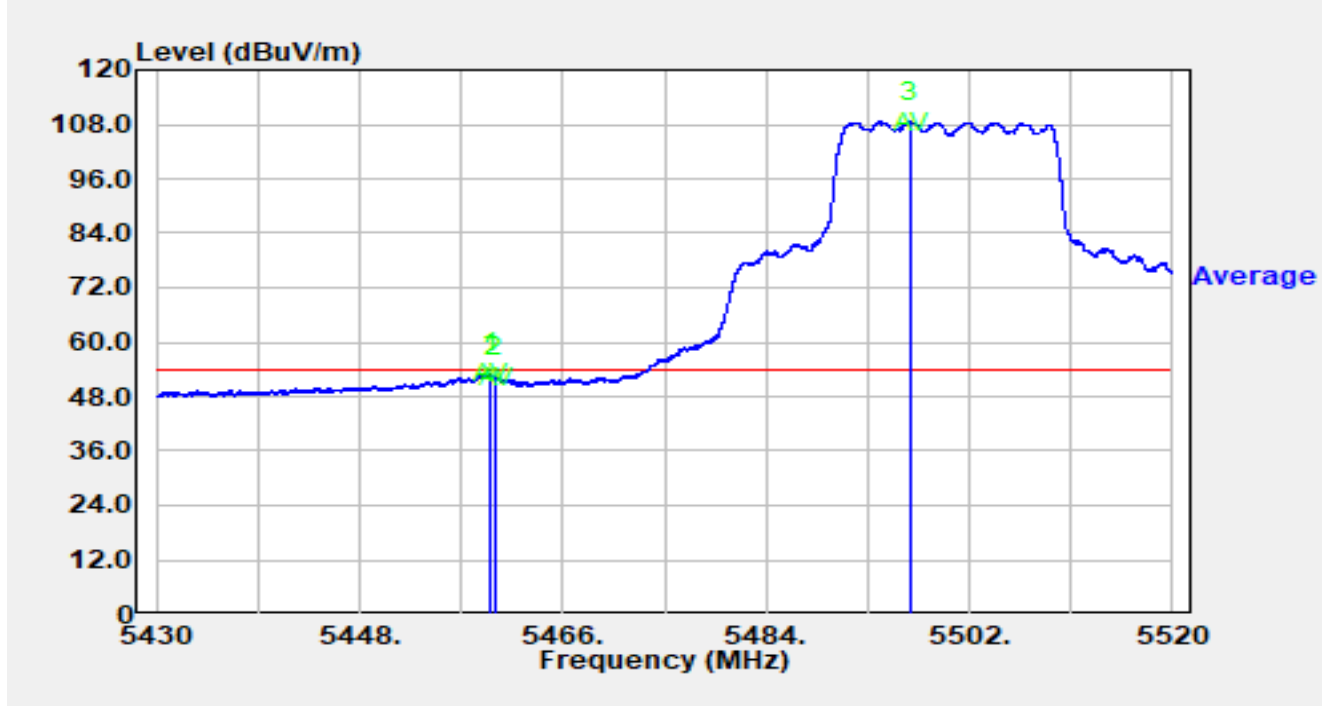


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.583	37.05	16.02	53.08	-0.92	54.00	Average
2		5460.000	36.33	16.02	52.36	-1.64	54.00	Average
3		5496.771	92.48	16.14	108.62	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

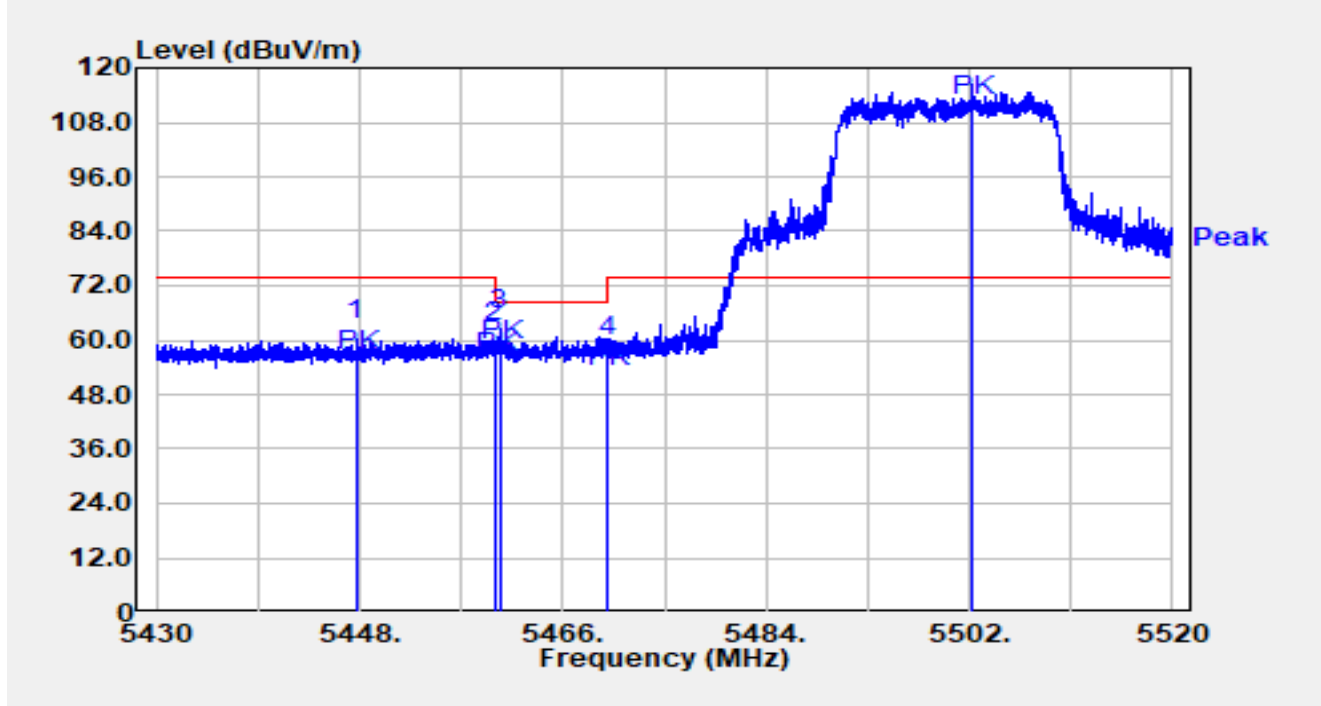


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5447.748	44.04	15.97	60.01	-13.99	74.00	Peak
2		5460.000	43.35	16.02	59.38	-8.82	68.20	Peak
3	*	5460.474	46.39	16.02	62.41	-5.79	68.20	Peak
4		5470.000	40.62	15.98	56.60	-11.60	68.20	Peak
5		5502.171	100.00	16.20	116.20	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

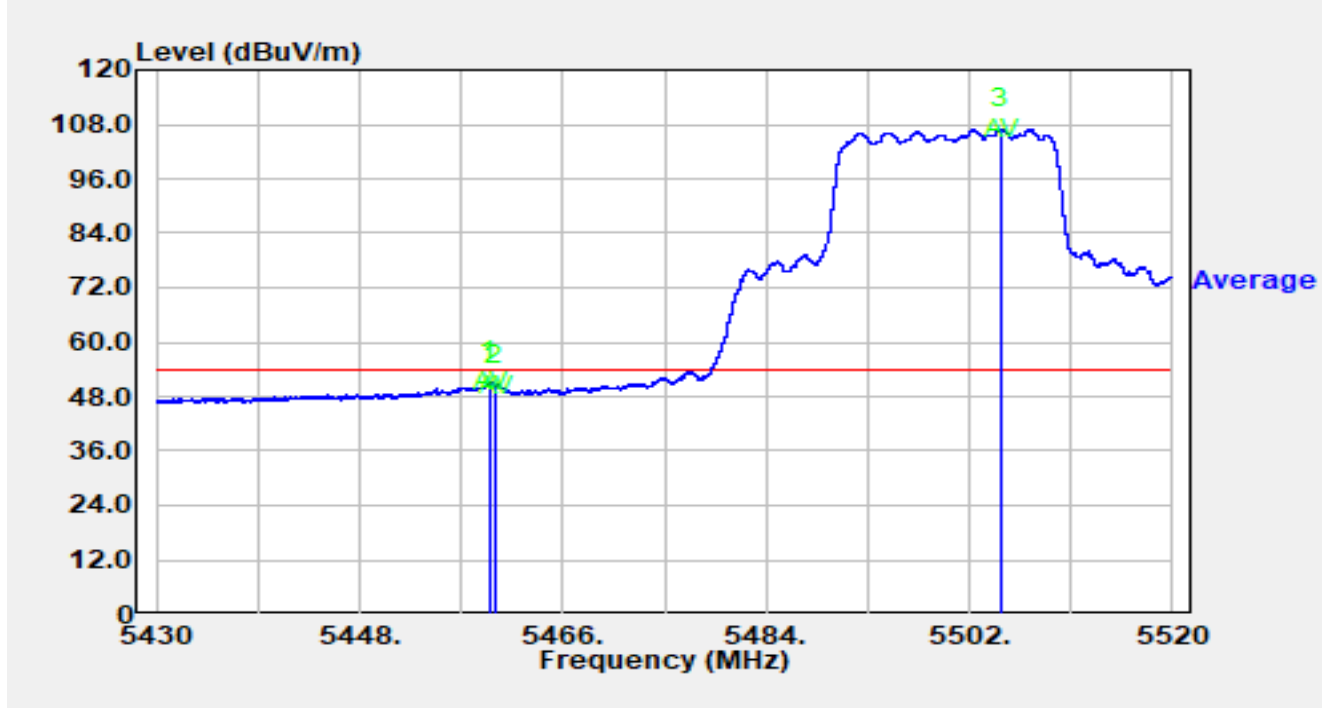


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.511	35.17	16.02	51.19	-2.81	54.00	Average
2		5460.000	34.35	16.02	50.38	-3.62	54.00	Average
3		5504.808	90.73	16.23	106.96	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5700MHz		

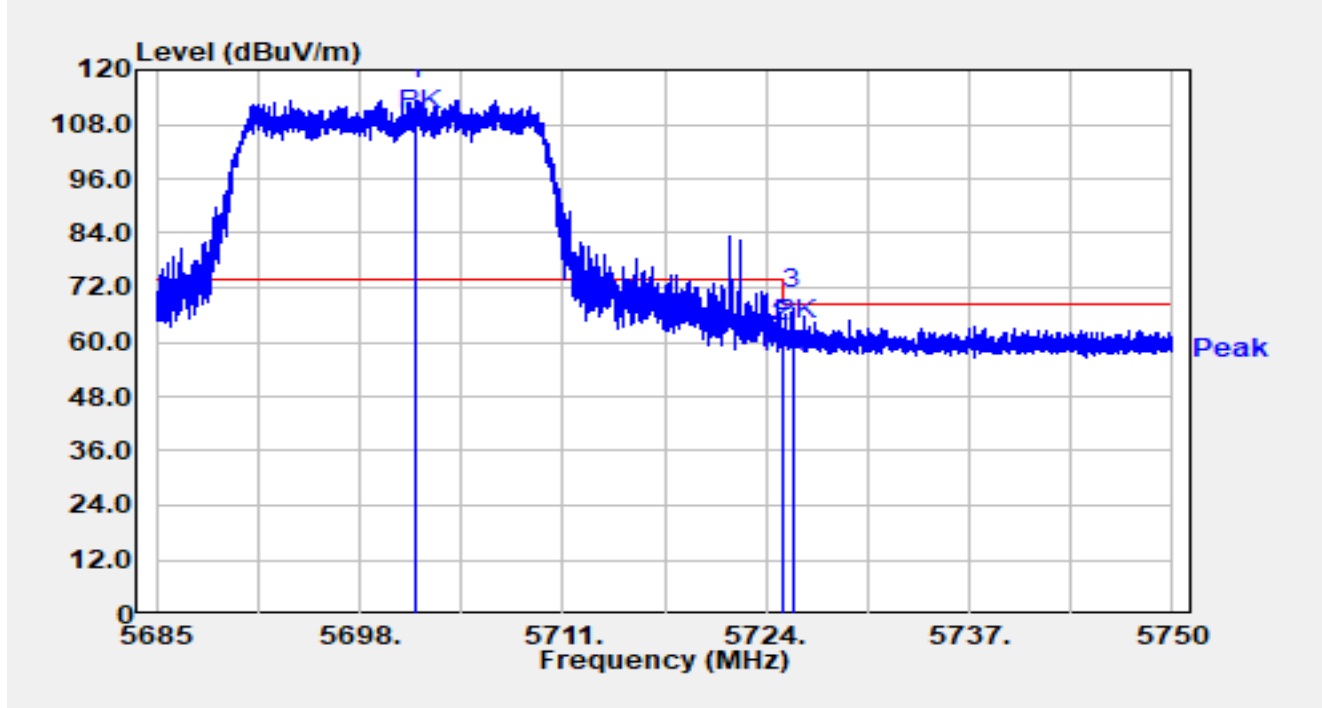


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5701.660	96.43	16.82	113.25	N/A	N/A	Peak
2		5725.000	43.02	16.92	59.95	-8.25	68.20	Peak
3	*	5725.742	50.35	16.93	67.28	-0.92	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5700MHz		

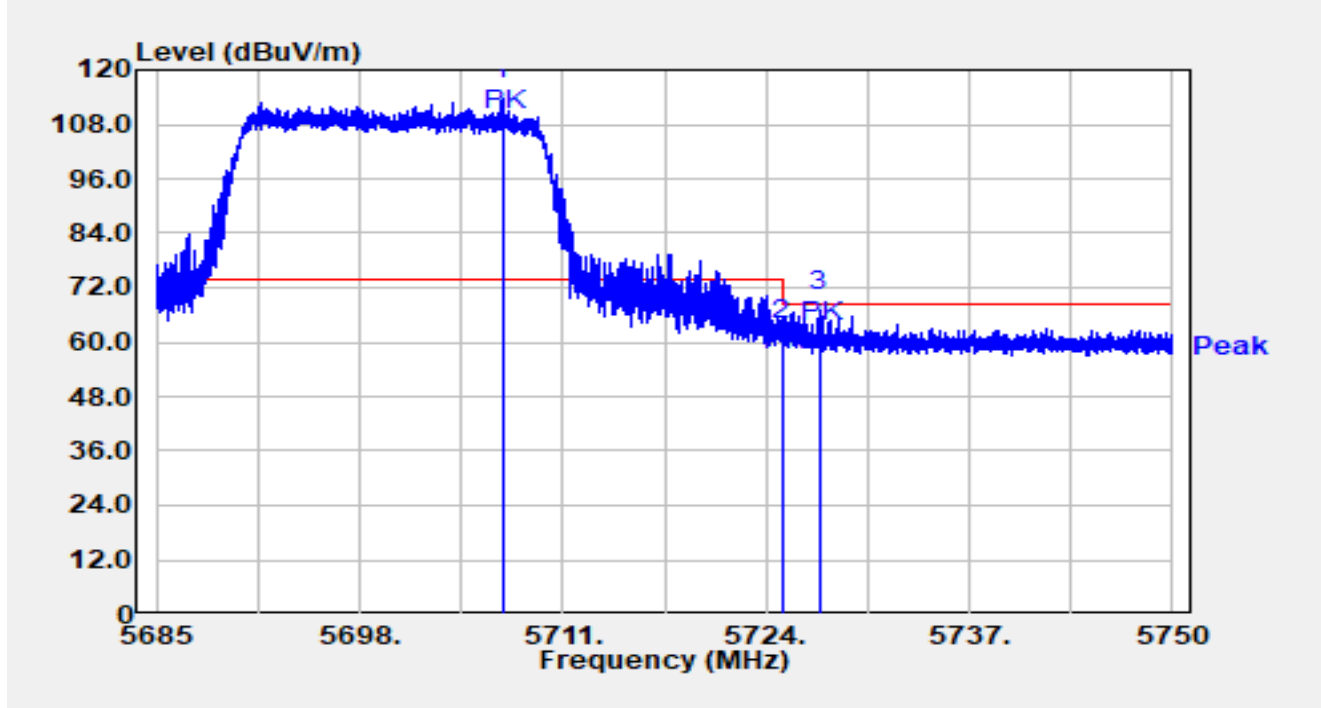


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5707.120	96.67	16.85	113.52	N/A	N/A	Peak
2		5725.000	43.58	16.92	60.50	-7.70	68.20	Peak
3	*	5727.413	49.94	16.93	66.87	-1.33	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5745MHz		

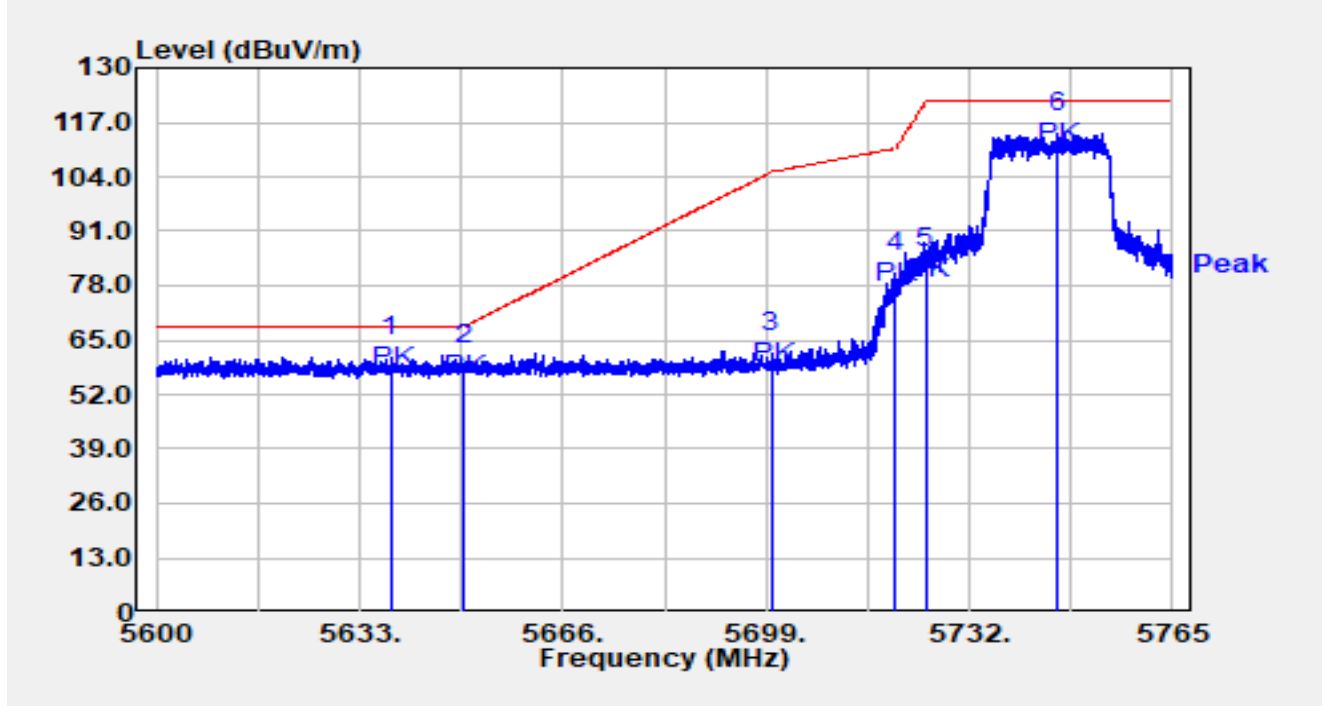


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5638.165	44.31	16.60	60.92	-7.28	68.20	Peak
2		5649.995	42.62	16.65	59.27	-8.93	68.20	Peak
3		5700.000	45.01	16.81	61.82	-43.38	105.20	Peak
4		5720.000	64.22	16.90	81.12	-29.68	110.80	Peak
5		5725.000	65.41	16.92	82.34	-39.86	122.20	Peak
6		5746.438	97.52	16.97	114.49	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5745MHz		

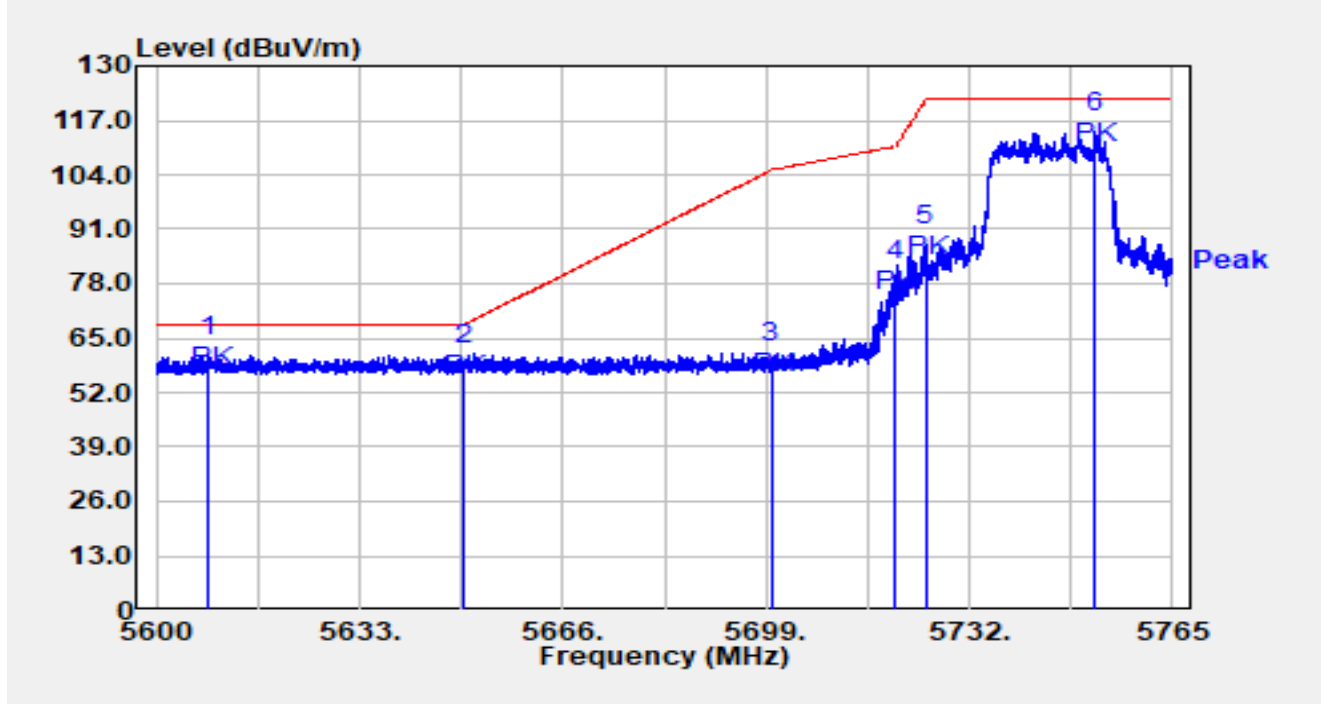


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5608.580	44.35	16.45	60.80	-7.40	68.20	Peak
2		5650.000	41.96	16.65	58.62	-9.58	68.20	Peak
3		5700.000	42.15	16.81	58.97	-46.23	105.20	Peak
4		5720.000	61.99	16.90	78.90	-31.90	110.80	Peak
5		5725.000	70.35	16.92	87.28	-34.92	122.20	Peak
6		5752.493	97.16	17.00	114.16	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5825MHz		

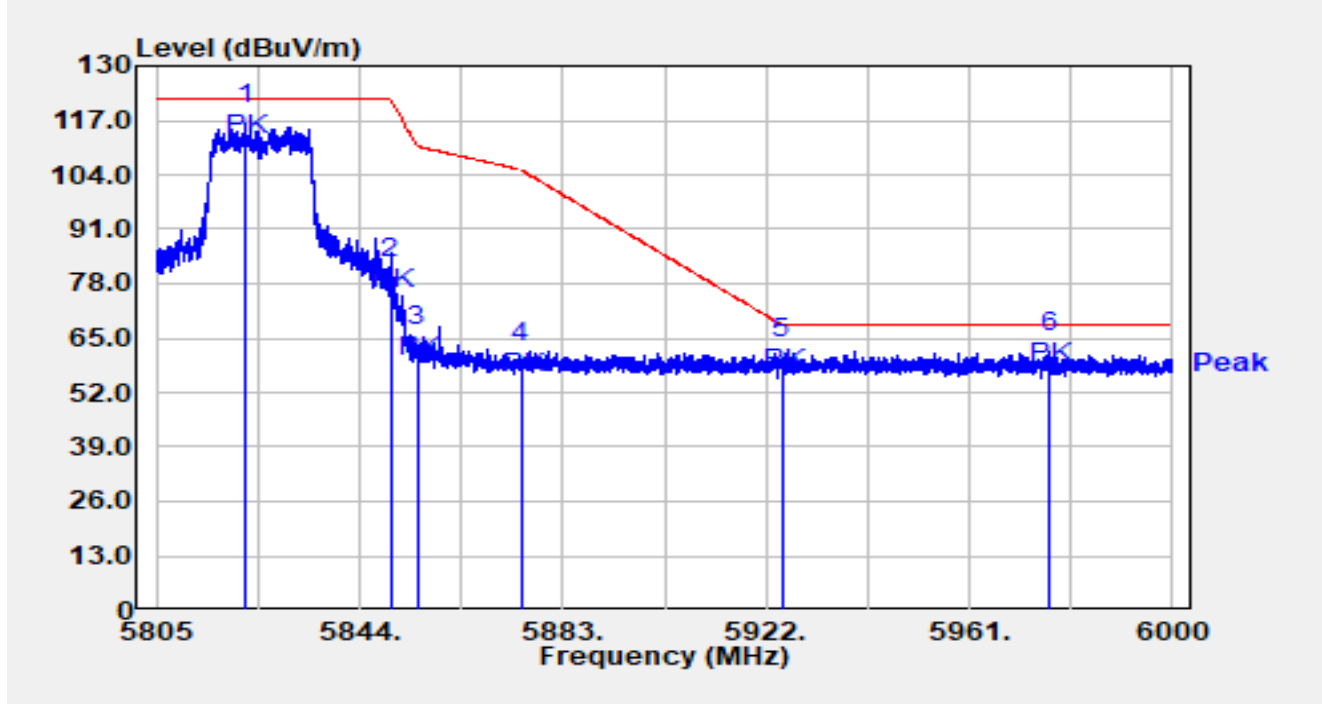


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5822.218	98.71	17.37	116.08	N/A	N/A	Peak
2		5850.000	62.00	17.31	79.31	-42.89	122.20	Peak
3		5855.000	45.76	17.32	63.09	-47.71	110.80	Peak
4		5875.000	41.63	17.38	59.00	-46.20	105.20	Peak
5		5925.000	42.97	17.36	60.33	-7.87	68.20	Peak
6	*	5976.327	44.09	17.57	61.65	-6.55	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5825MHz		

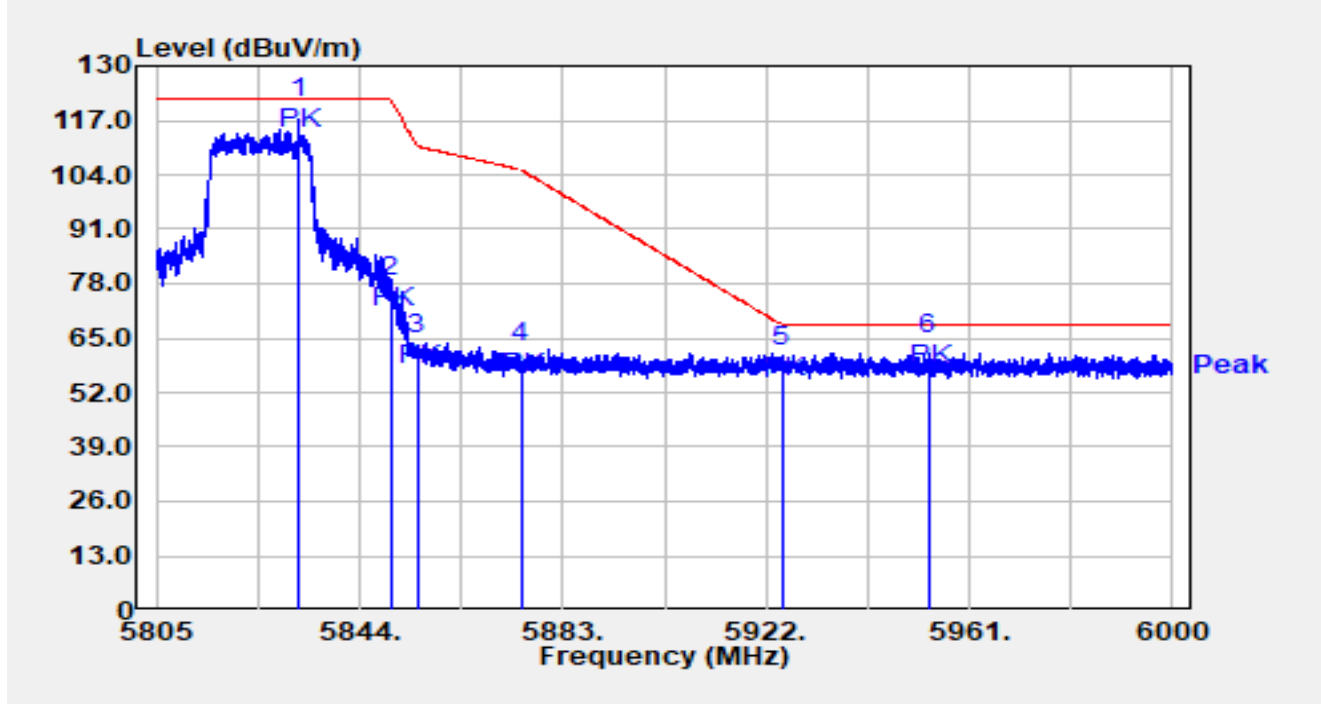


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5832.397	100.01	17.35	117.36	N/A	N/A	Peak
2		5850.000	57.58	17.31	74.89	-47.31	122.20	Peak
3		5855.000	43.62	17.32	60.95	-49.85	110.80	Peak
4		5875.000	41.95	17.38	59.32	-45.88	105.20	Peak
5		5925.000	41.00	17.36	58.37	-9.83	68.20	Peak
6	*	5953.122	43.86	17.45	61.32	-6.88	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

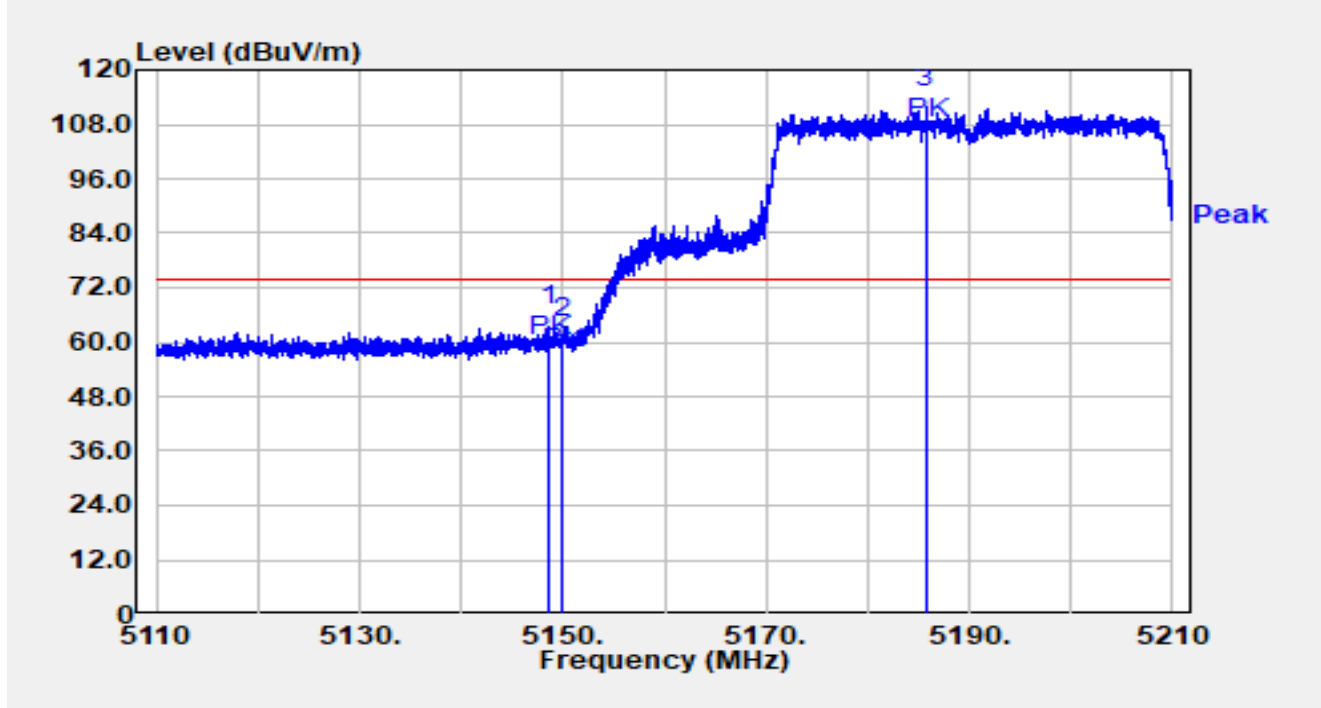


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.690	47.62	16.00	63.61	-10.39	74.00	Peak
2		5150.000	45.12	16.00	61.12	-12.88	74.00	Peak
3		5185.790	95.69	15.94	111.63	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

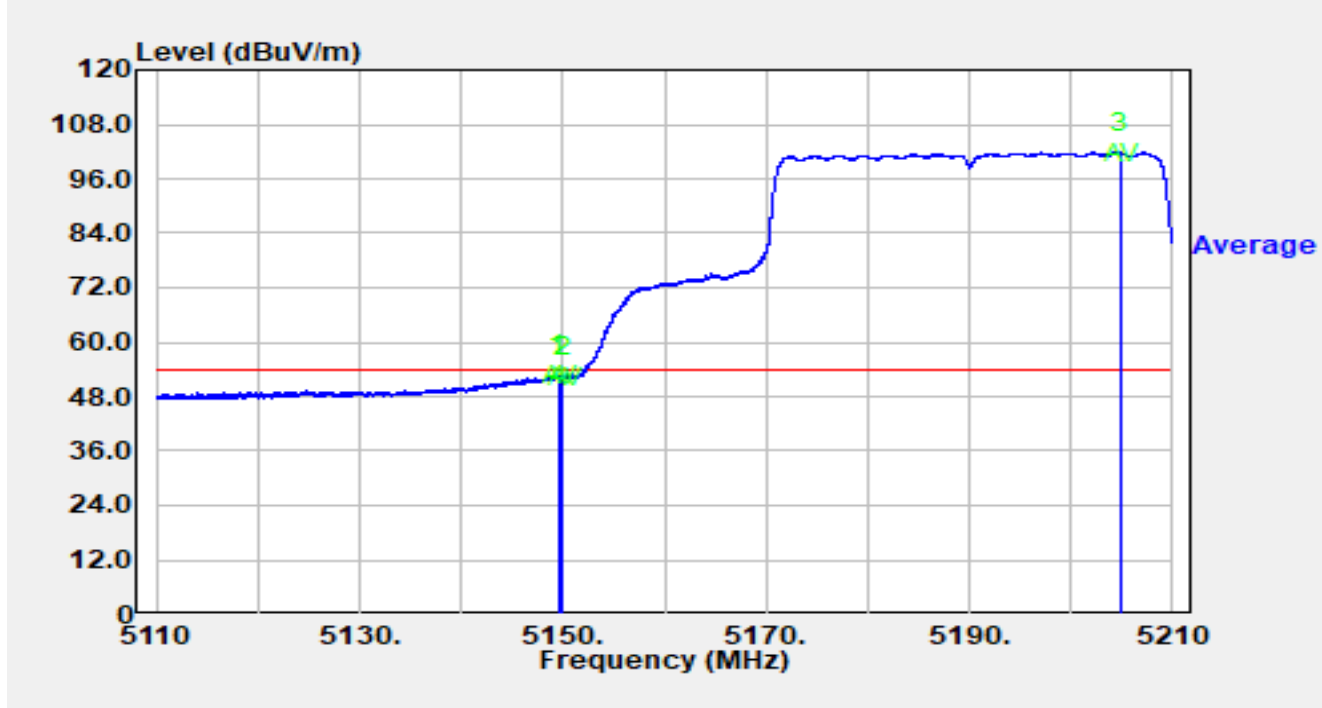


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.620	36.72	16.00	52.71	-1.29	54.00	Average
2		5150.000	36.45	16.00	52.44	-1.56	54.00	Average
3		5204.850	85.94	15.94	101.87	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

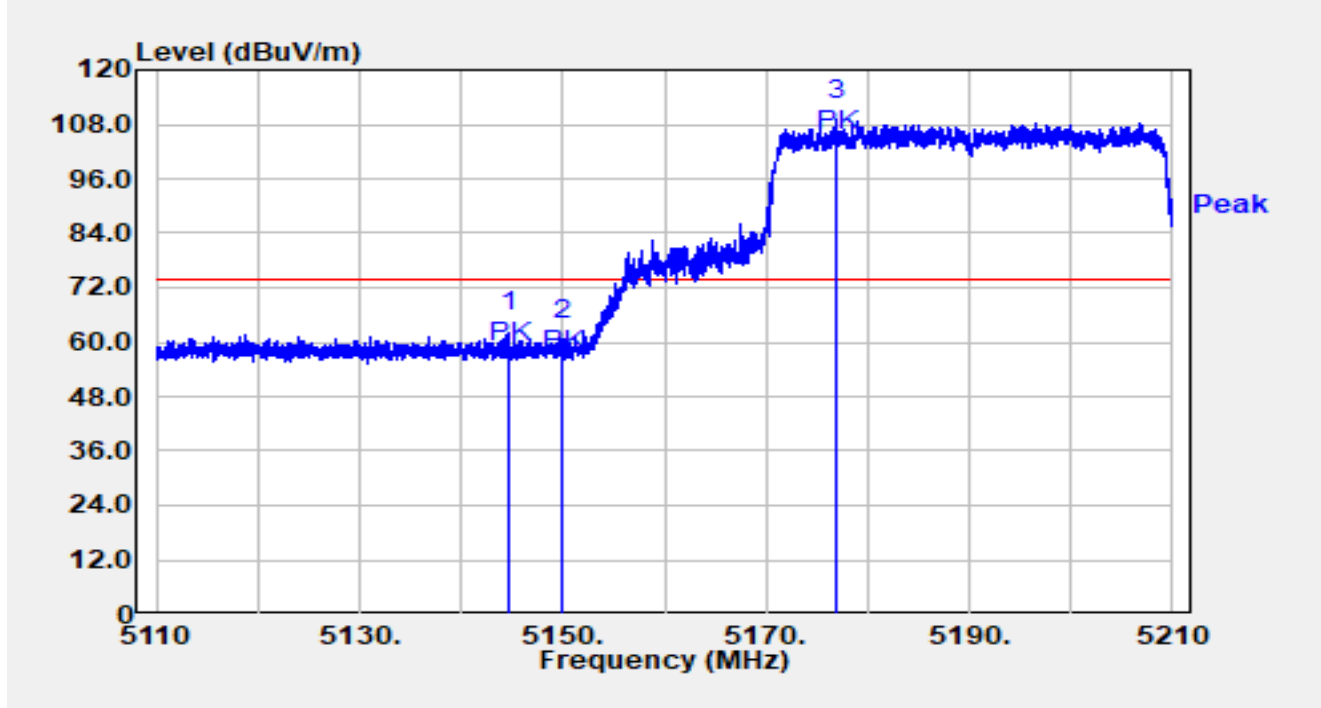


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.700	46.25	15.99	62.24	-11.76	74.00	Peak
2		5150.000	44.40	16.00	60.39	-13.61	74.00	Peak
3		5176.950	93.15	15.95	109.10	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

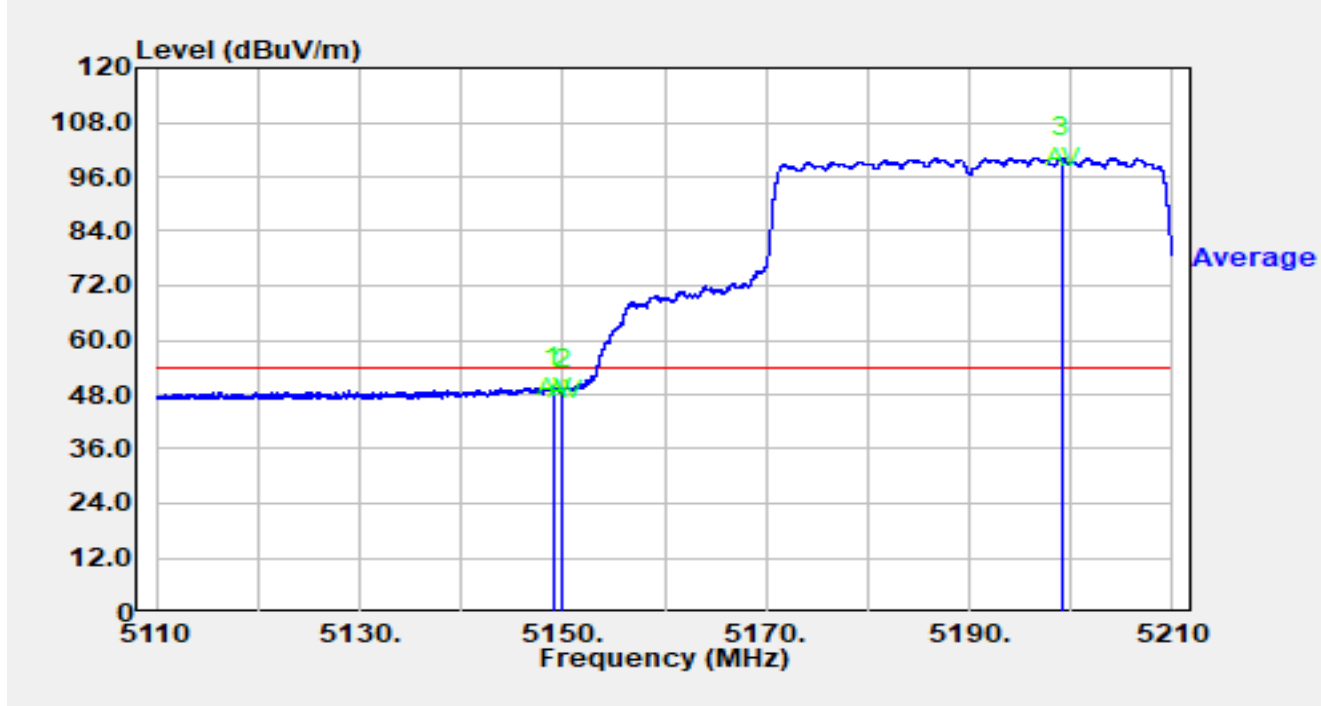


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.100	33.69	16.00	49.69	-4.31	54.00	Average
2		5150.000	32.99	16.00	48.99	-5.01	54.00	Average
3		5199.080	84.23	15.97	100.20	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

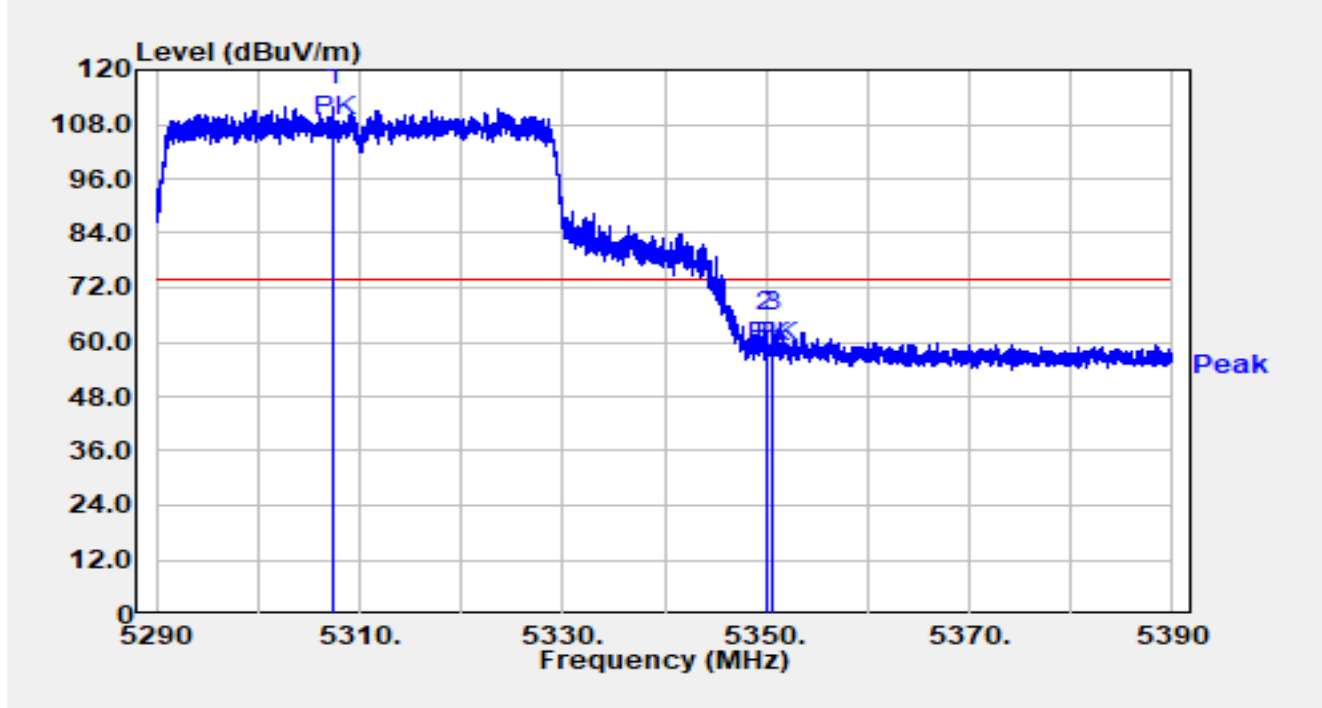


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5307.420	96.17	15.77	111.94	N/A	N/A	Peak
2		5350.000	46.43	15.68	62.11	-11.89	74.00	Peak
3	*	5350.730	46.55	15.68	62.23	-11.77	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

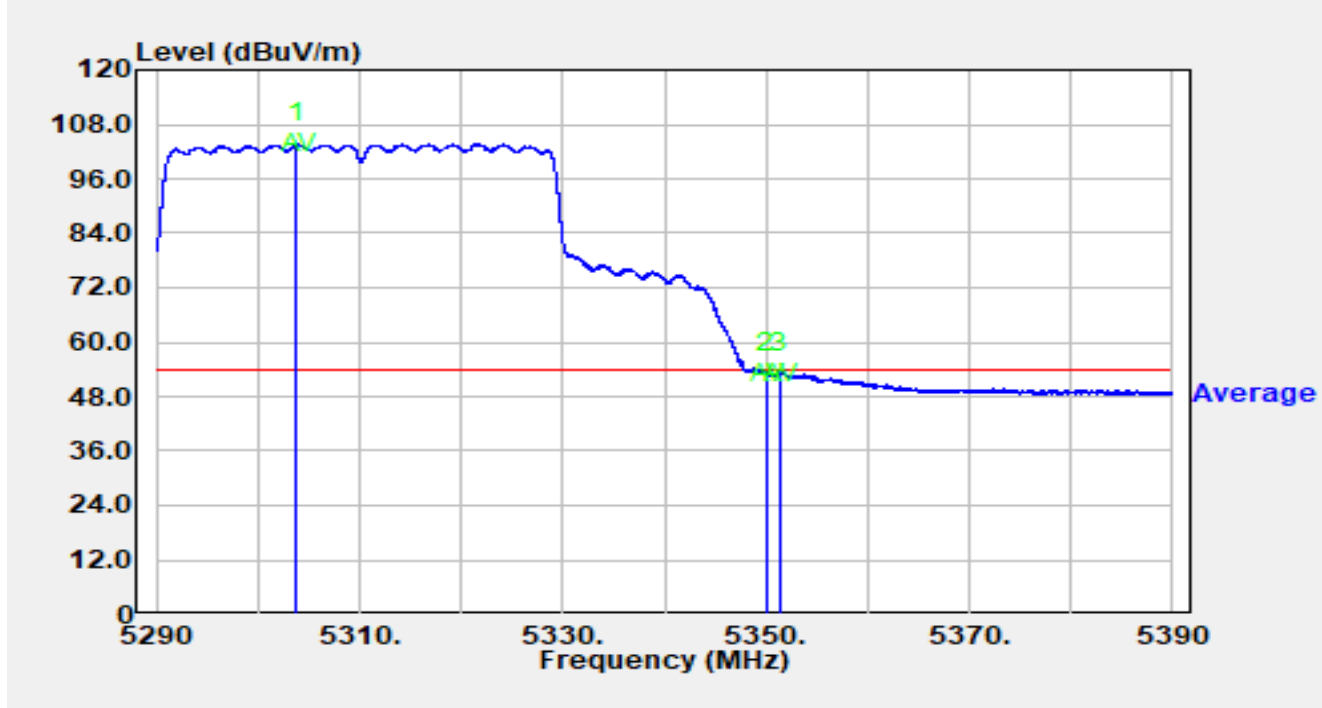


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5303.790	87.94	15.76	103.71	N/A	N/A	Average
2		5350.000	37.67	15.68	53.35	-0.65	54.00	Average
3	*	5351.360	37.69	15.68	53.37	-0.63	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

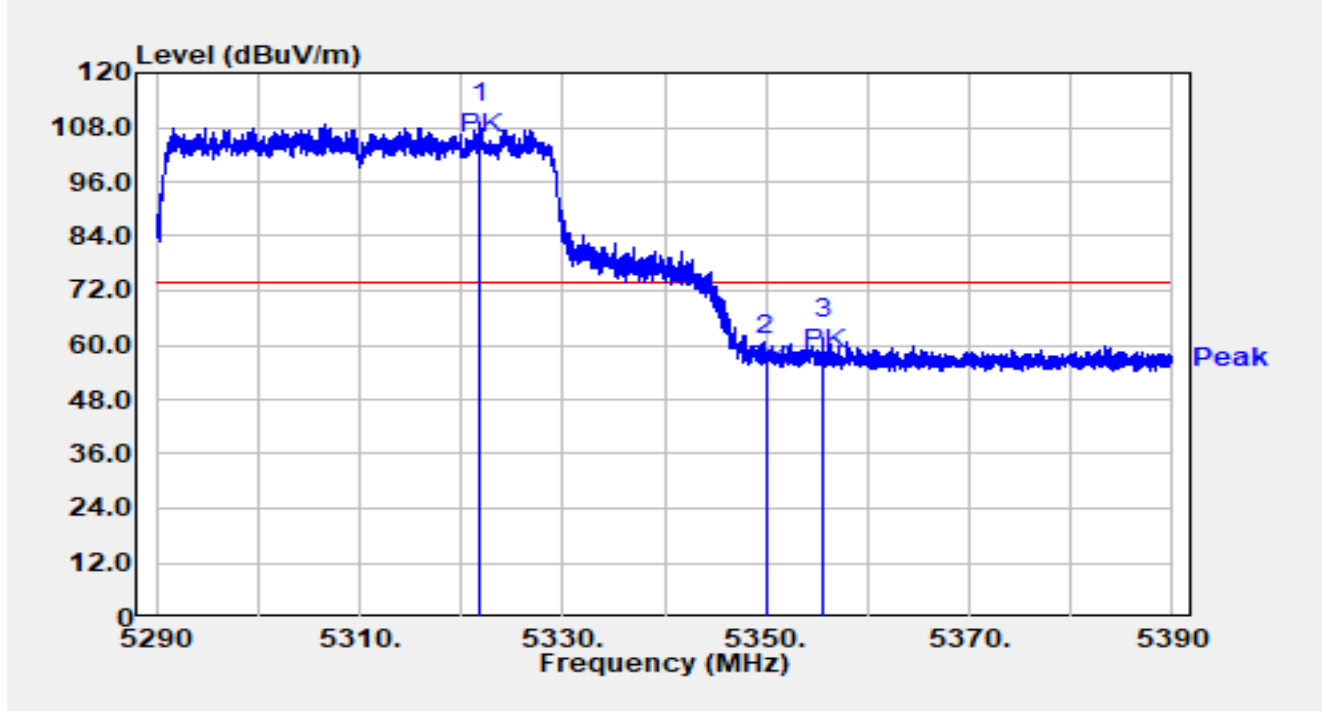


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.820	93.33	15.80	109.13	N/A	N/A	Peak
2		5350.000	41.98	15.68	57.66	-16.34	74.00	Peak
3	*	5355.600	45.78	15.66	61.45	-12.55	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

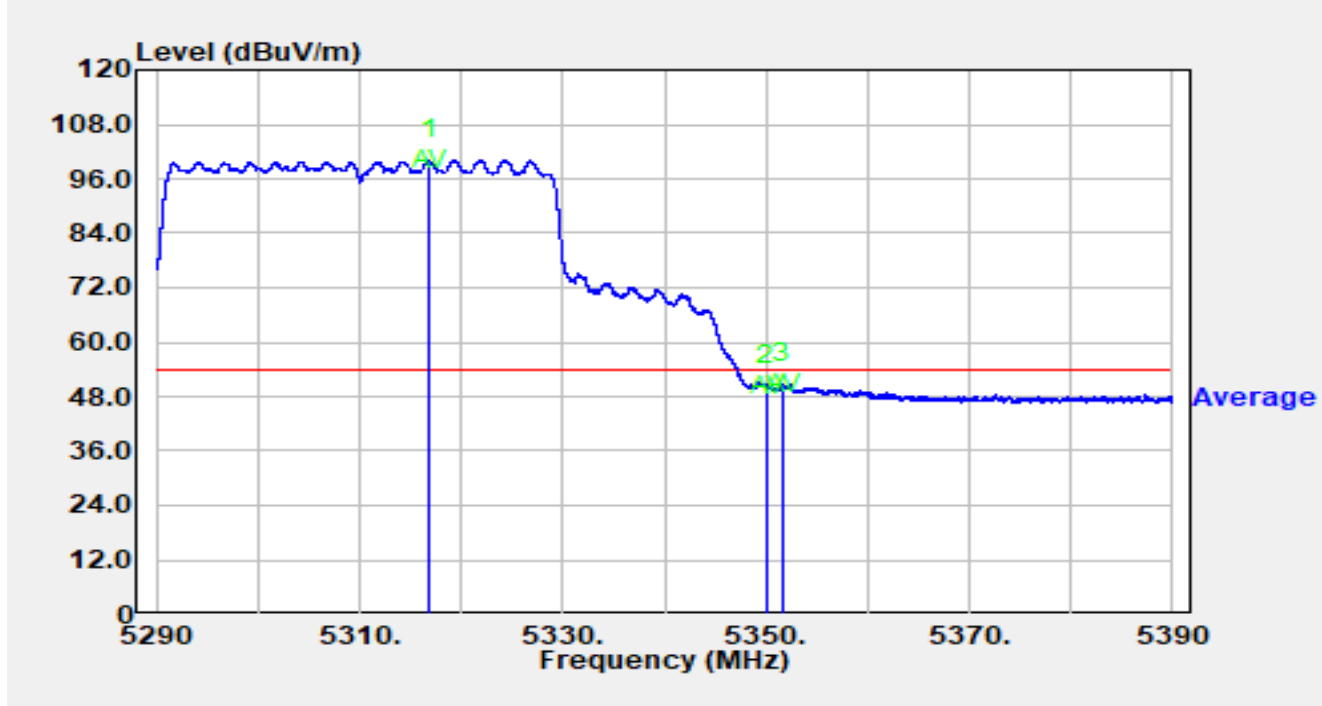


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5316.820	84.33	15.79	100.12	N/A	N/A	Average
2		5350.000	34.77	15.68	50.45	-3.55	54.00	Average
3	*	5351.650	35.18	15.68	50.86	-3.14	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

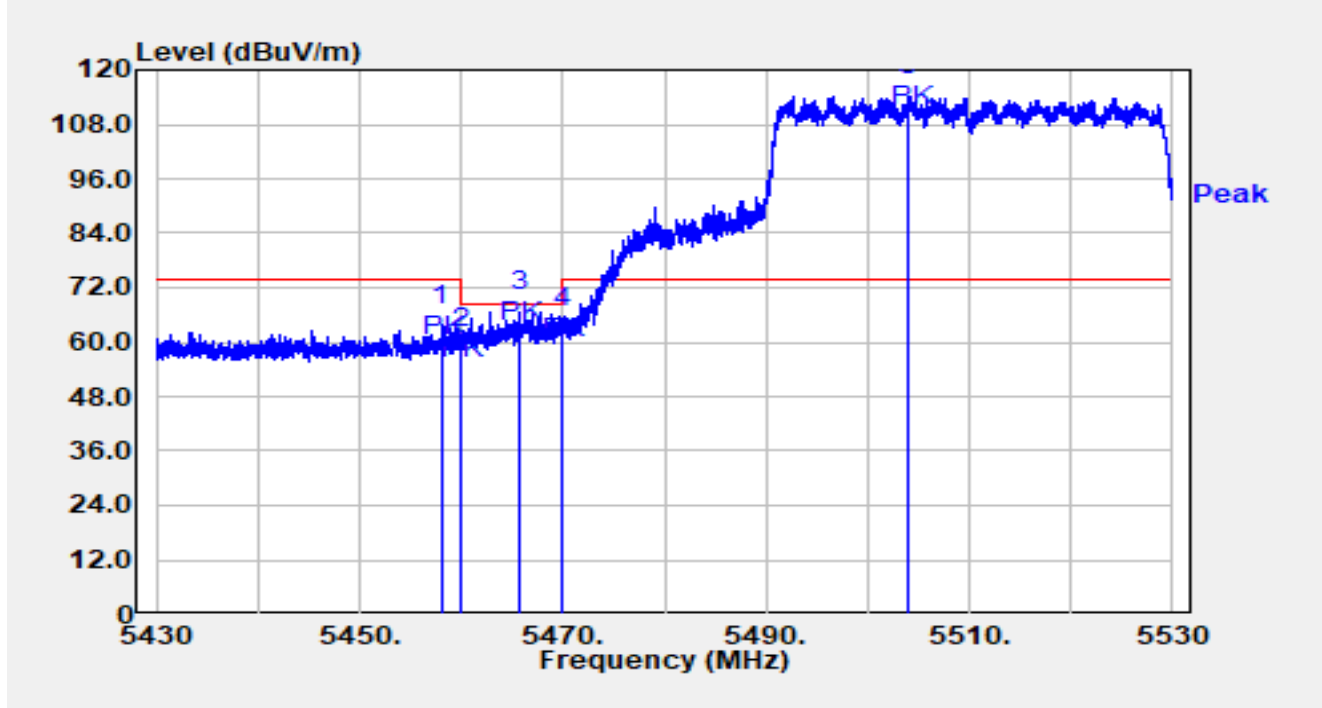


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.050	47.71	16.03	63.74	-10.26	74.00	Peak
2		5460.000	42.52	16.02	58.55	-9.65	68.20	Peak
3	*	5465.820	50.75	16.00	66.75	-1.45	68.20	Peak
4		5470.000	47.15	15.98	63.13	-5.07	68.20	Peak
5		5504.090	98.03	16.22	114.25	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

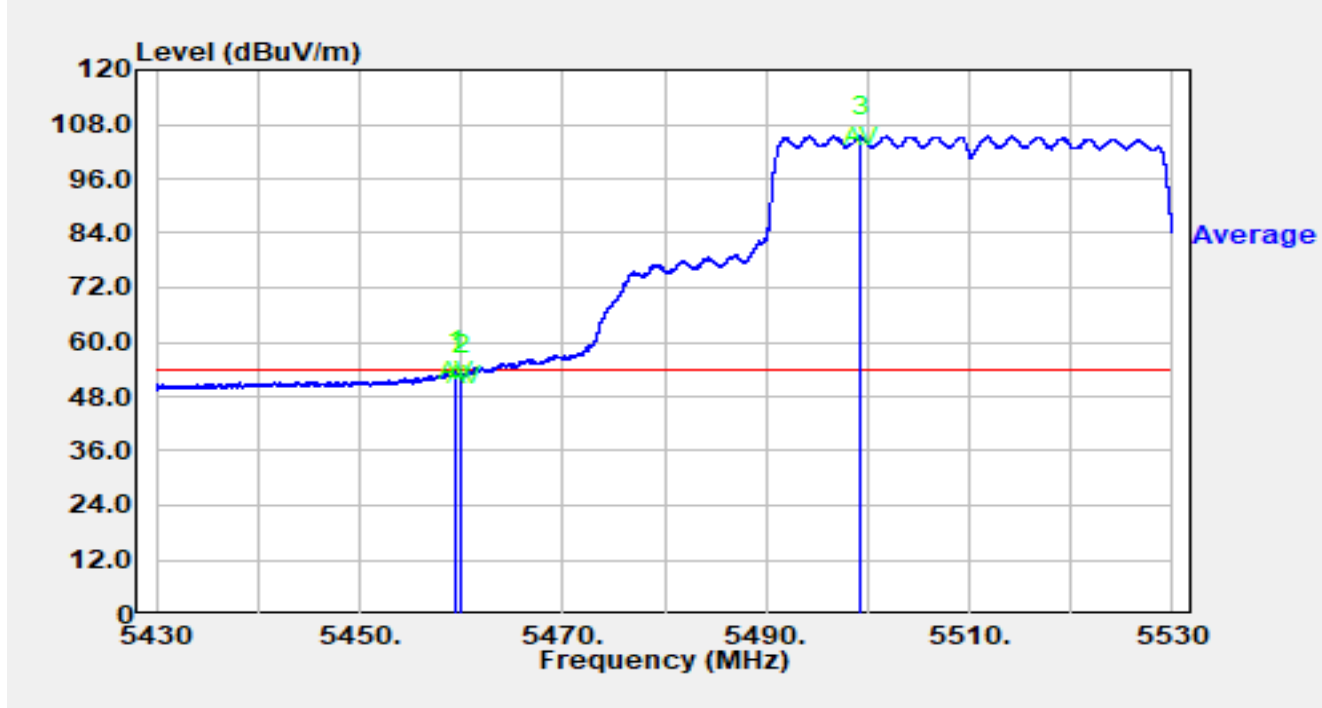


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.460	37.46	16.02	53.48	-0.52	54.00	Average
2		5460.000	36.74	16.02	52.77	-1.23	54.00	Average
3		5499.260	89.19	16.17	105.36	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

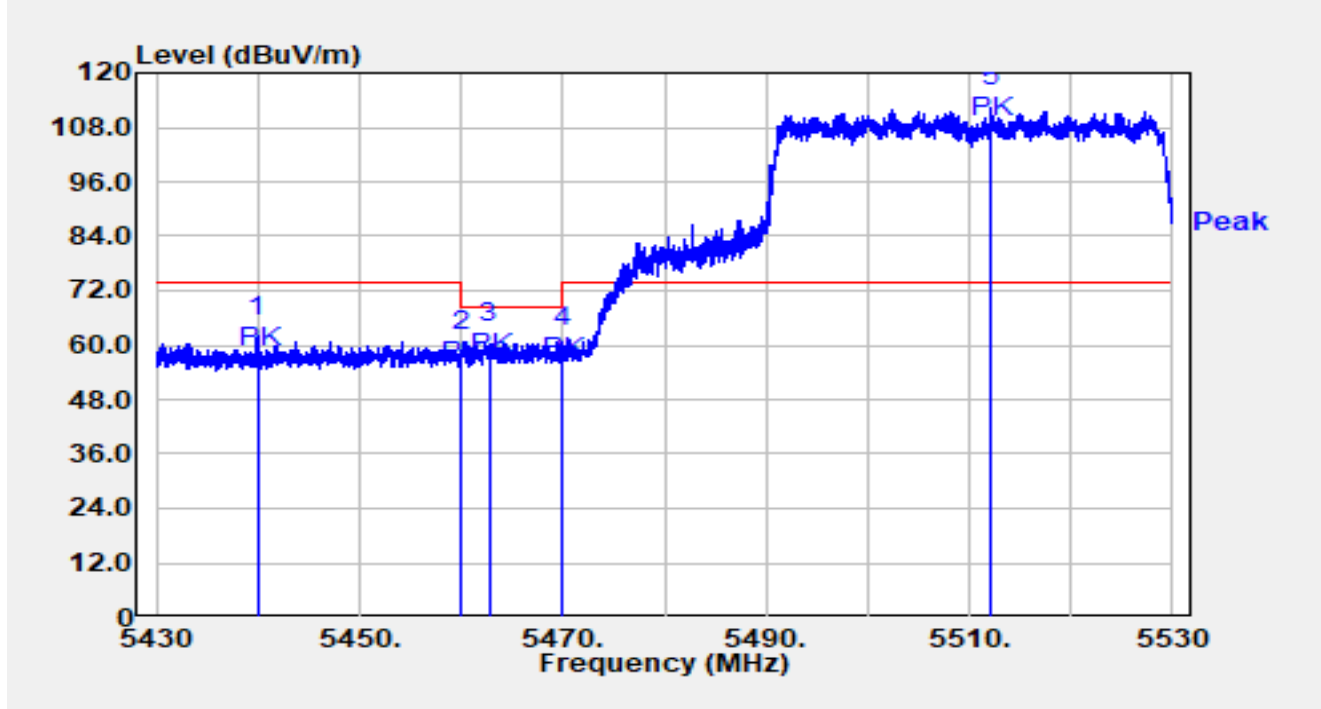


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5439.930	46.13	15.88	62.01	-11.99	74.00	Peak
2		5460.000	42.75	16.02	58.78	-9.42	68.20	Peak
3	*	5462.730	44.33	16.01	60.34	-7.86	68.20	Peak
4		5470.000	43.54	15.98	59.52	-8.68	68.20	Peak
5		5512.160	96.22	16.21	112.42	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

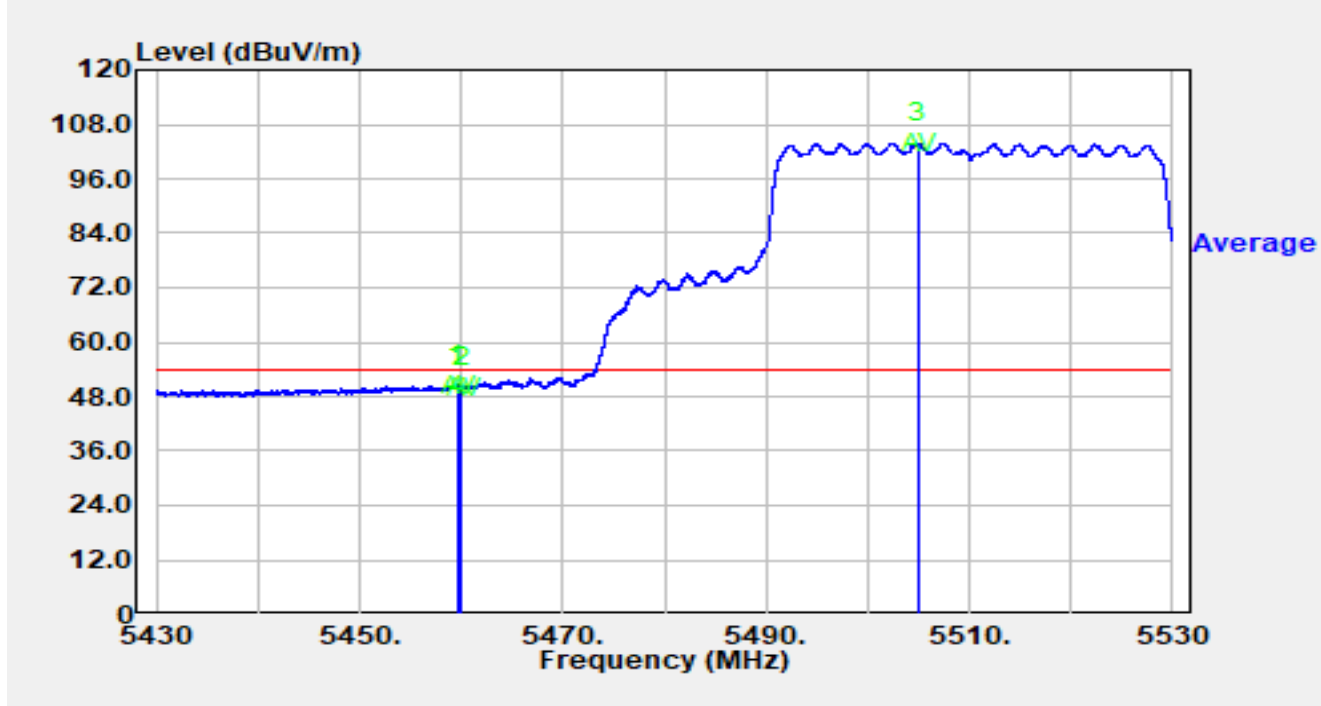


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.610	34.48	16.02	50.50	-3.50	54.00	Average
2		5460.000	33.99	16.02	50.01	-3.99	54.00	Average
3		5504.930	87.66	16.23	103.89	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5670MHz		

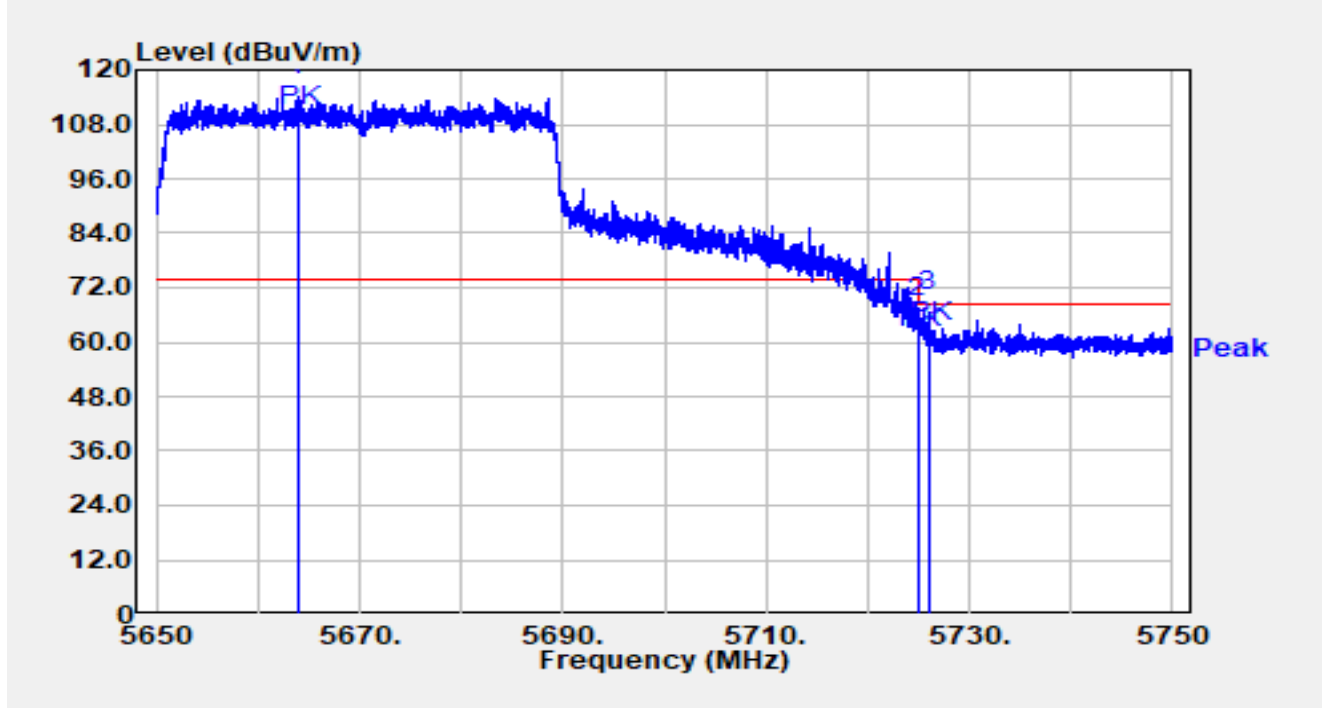


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5663.870	97.62	16.68	114.30	N/A	N/A	Peak
2		5725.000	48.61	16.92	65.53	-2.67	68.20	Peak
3	*	5726.010	49.84	16.93	66.76	-1.44	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5670MHz		

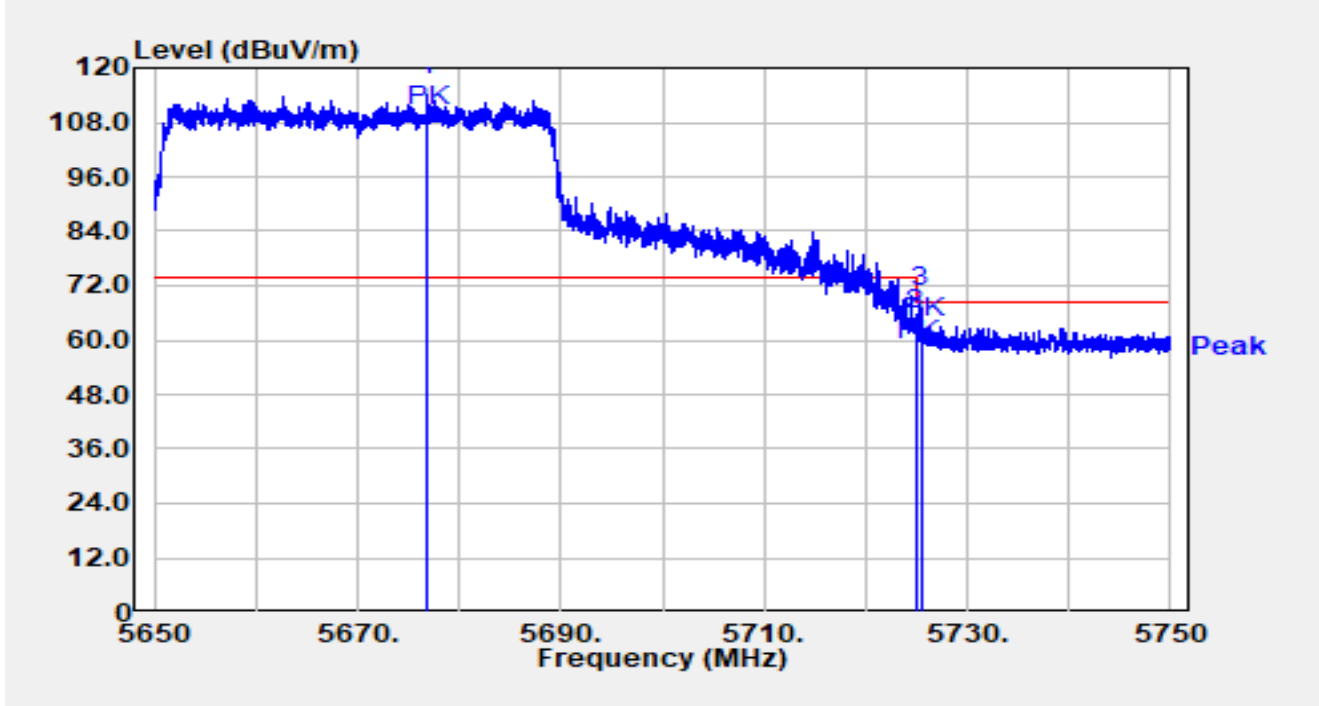


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5676.840	97.32	16.64	113.96	N/A	N/A	Peak
2		5725.000	45.23	16.92	62.15	-6.05	68.20	Peak
3	*	5725.500	50.28	16.93	67.20	-1.00	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5755MHz		

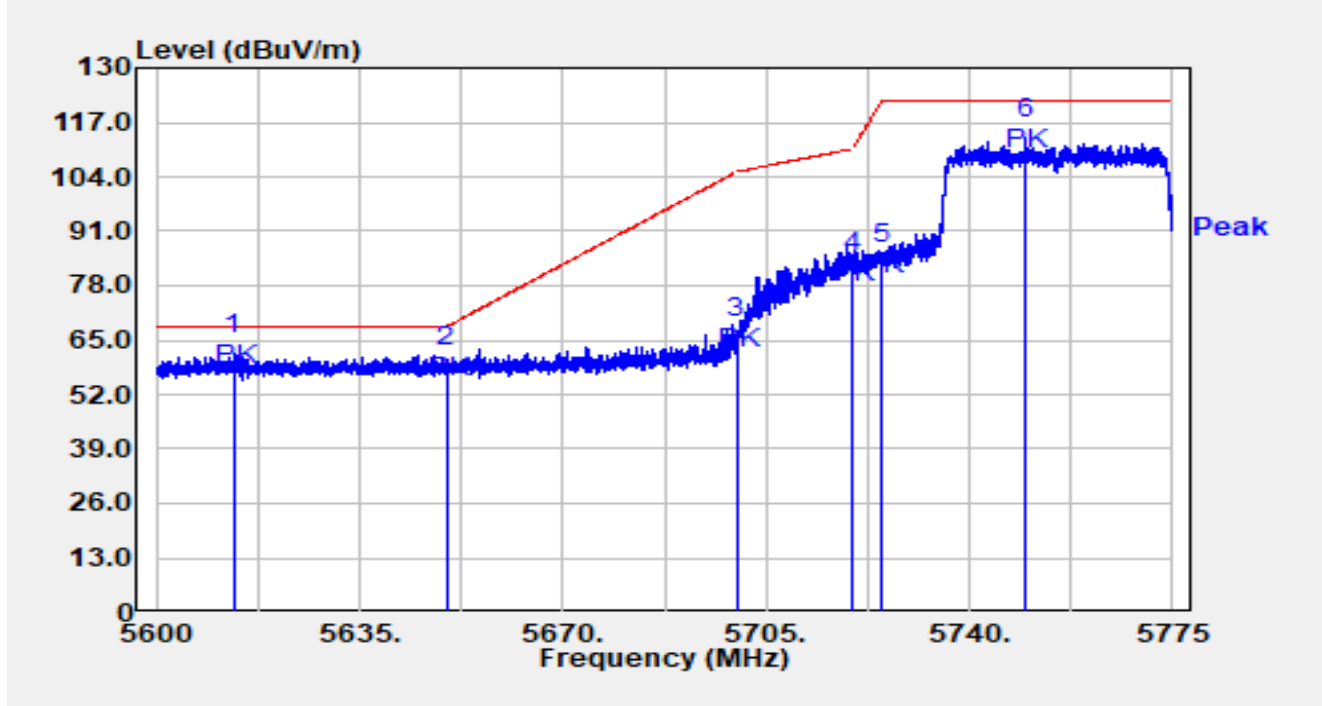


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5613.388	45.11	16.46	61.57	-6.63	68.20	Peak
2		5650.000	42.19	16.65	58.84	-9.36	68.20	Peak
3		5700.000	48.44	16.81	65.25	-39.95	105.20	Peak
4		5720.000	64.46	16.90	81.36	-29.44	110.80	Peak
5		5725.000	66.45	16.92	83.37	-38.83	122.20	Peak
6		5749.678	96.16	16.99	113.14	N/A	N/A	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5755MHz		

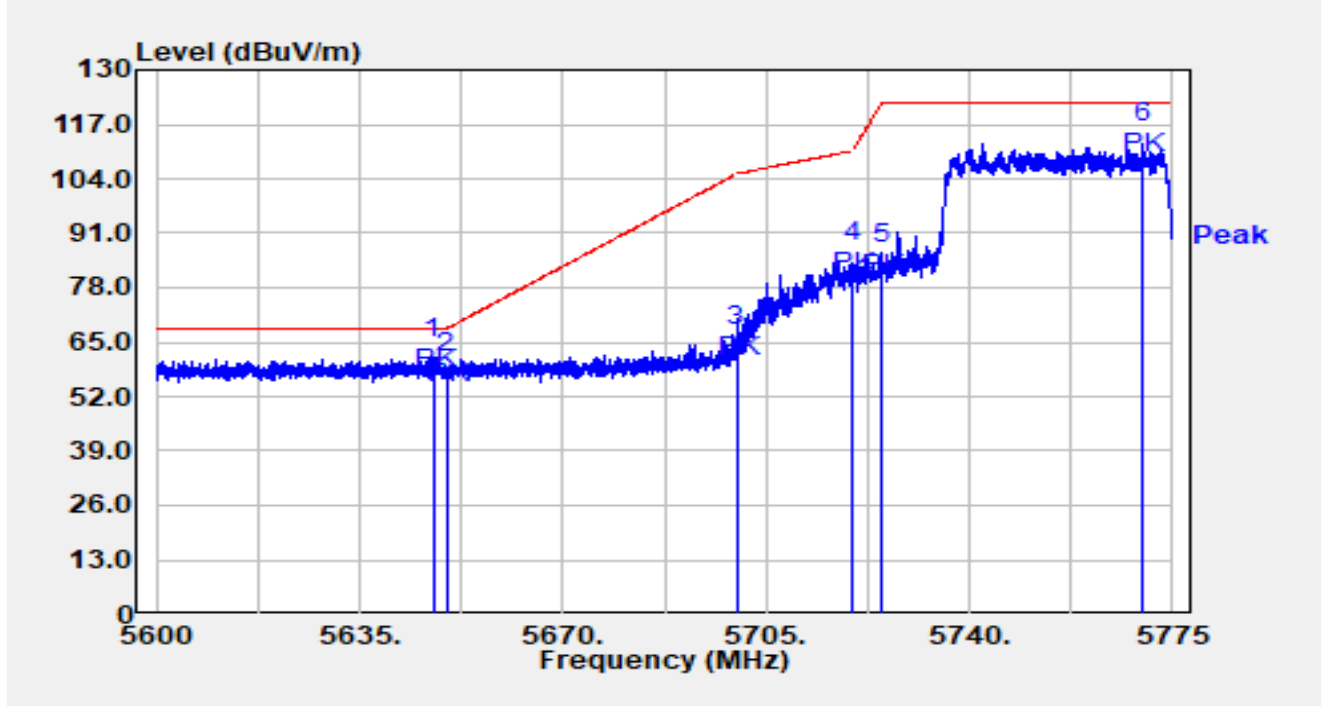


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5647.618	44.58	16.64	61.23	-6.97	68.20	Peak
2		5650.000	41.09	16.65	57.74	-10.46	68.20	Peak
3		5700.000	47.20	16.81	64.01	-41.19	105.20	Peak
4		5720.000	67.15	16.90	84.05	-26.75	110.80	Peak
5		5725.000	66.52	16.92	83.45	-38.75	122.20	Peak
6		5769.925	95.36	17.12	112.48	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5795MHz		

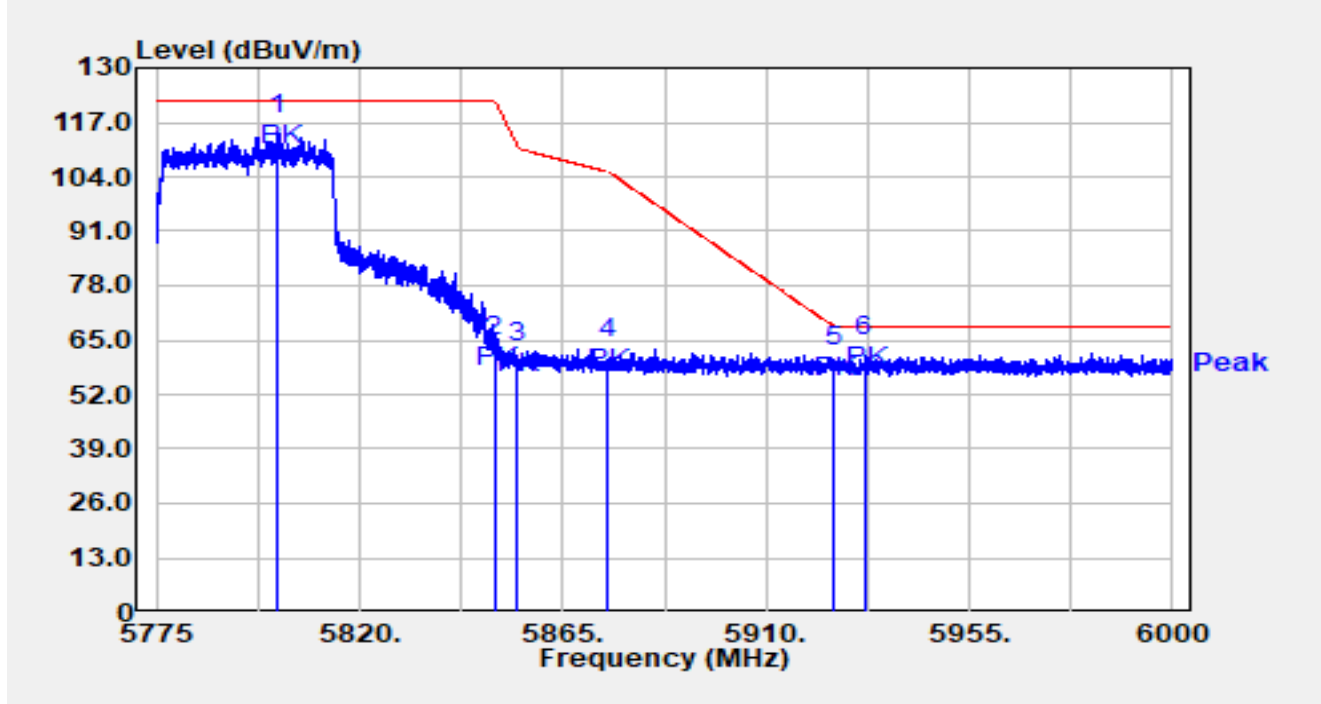


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5802.022	96.96	17.32	114.29	N/A	N/A	Peak
2		5850.000	43.80	17.31	61.11	-61.09	122.20	Peak
3		5855.000	42.42	17.32	59.74	-51.06	110.80	Peak
4		5875.000	43.15	17.38	60.52	-44.68	105.20	Peak
5		5925.000	41.43	17.36	58.80	-9.40	68.20	Peak
6	*	5931.825	43.86	17.39	61.25	-6.95	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5795MHz		

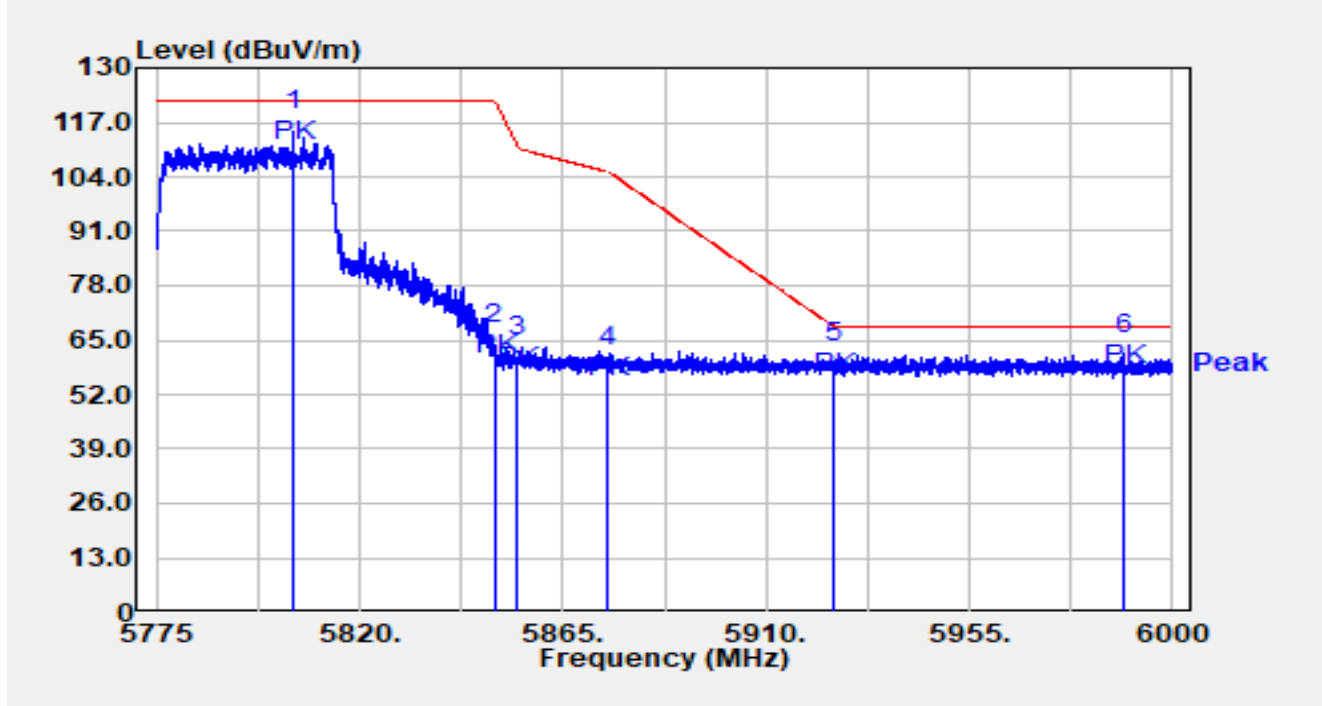


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5805.330	97.57	17.34	114.91	N/A	N/A	Peak
2		5850.000	46.65	17.31	63.96	-58.24	122.20	Peak
3		5855.000	43.70	17.32	61.02	-49.78	110.80	Peak
4		5875.000	41.41	17.38	58.78	-46.42	105.20	Peak
5		5925.000	42.05	17.36	59.41	-8.79	68.20	Peak
6	*	5989.268	44.28	17.46	61.74	-6.46	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

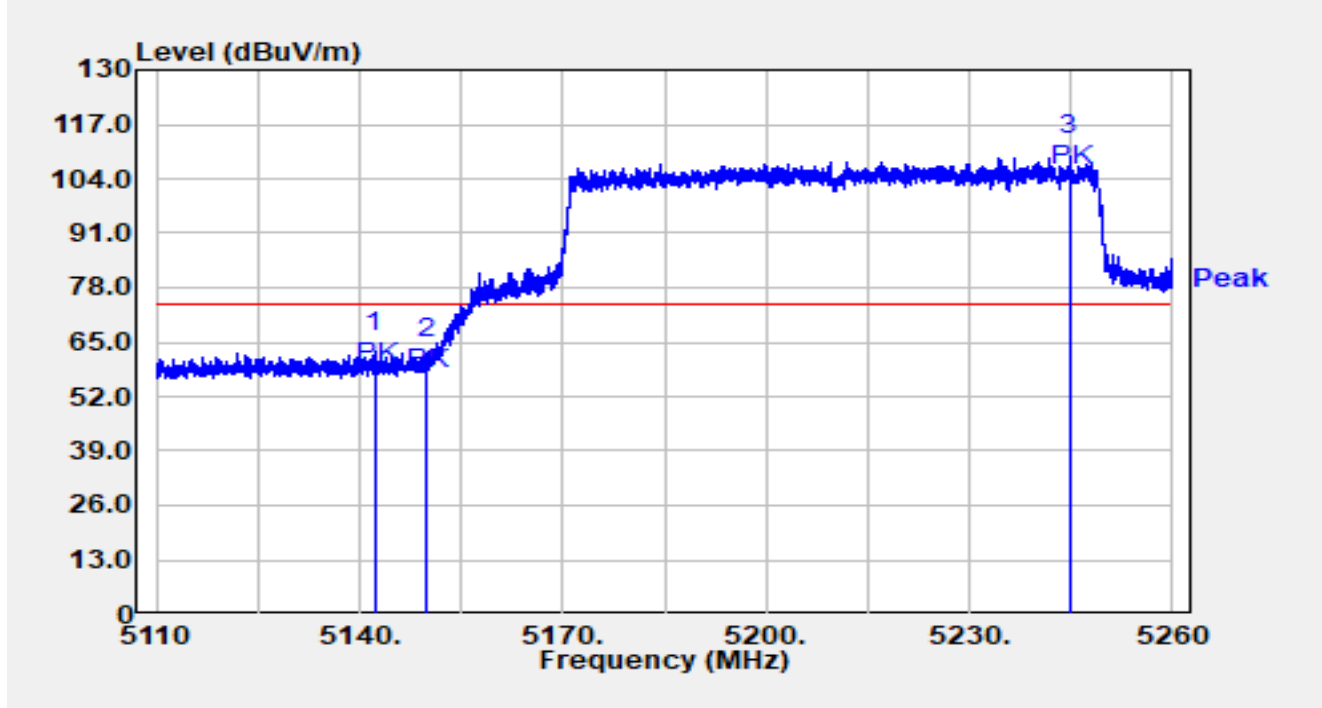


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5142.205	46.78	15.98	62.76	-11.24	74.00	Peak
2		5150.000	45.31	16.00	61.31	-12.69	74.00	Peak
3		5244.790	93.59	15.97	109.56	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

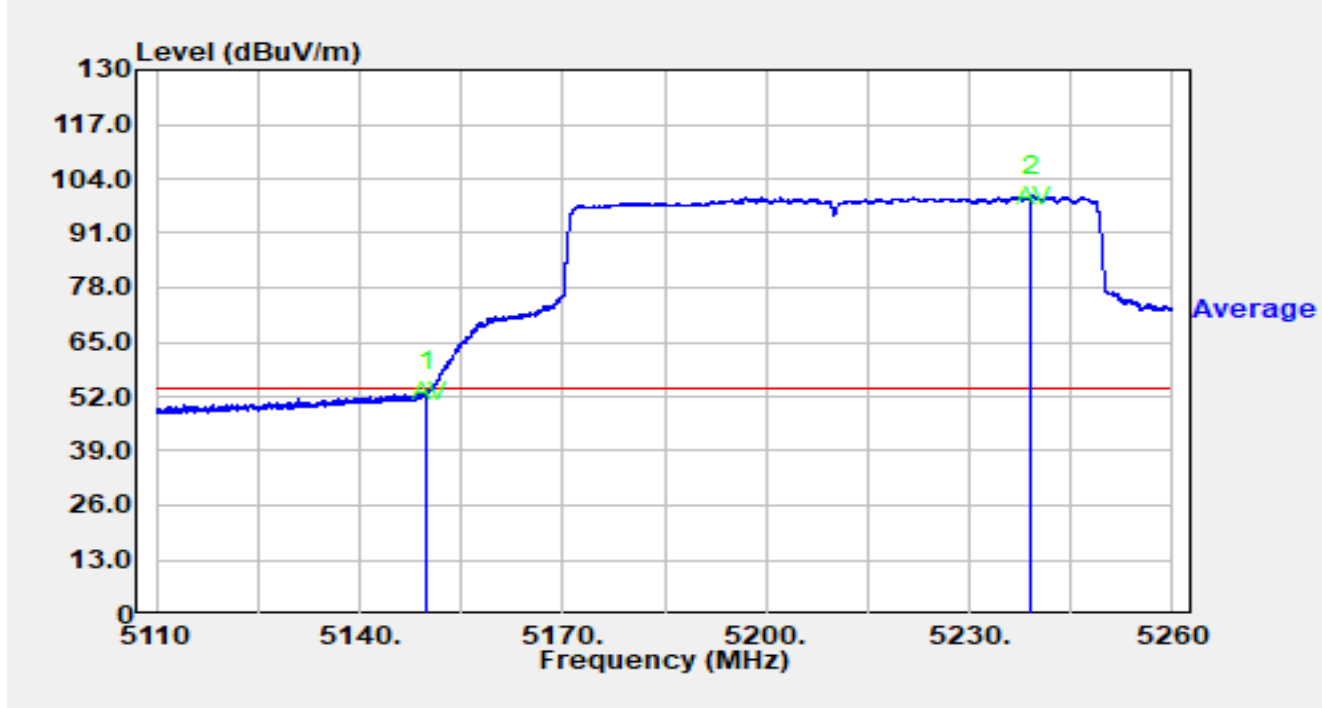


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	37.15	16.00	53.14	-0.86	54.00	Average
2		5239.165	84.01	15.97	99.98	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

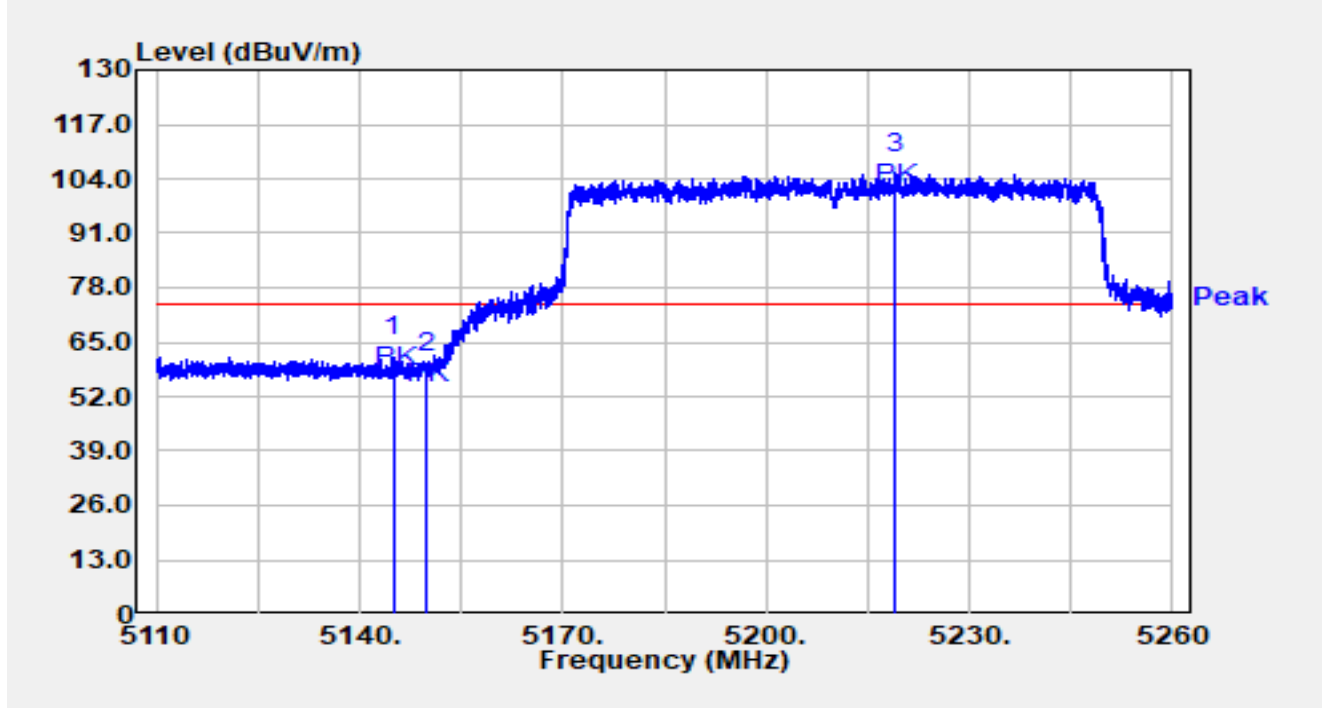


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.920	45.47	15.99	61.46	-12.54	74.00	Peak
2		5150.000	41.89	16.00	57.88	-16.12	74.00	Peak
3		5219.050	89.39	15.86	105.25	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

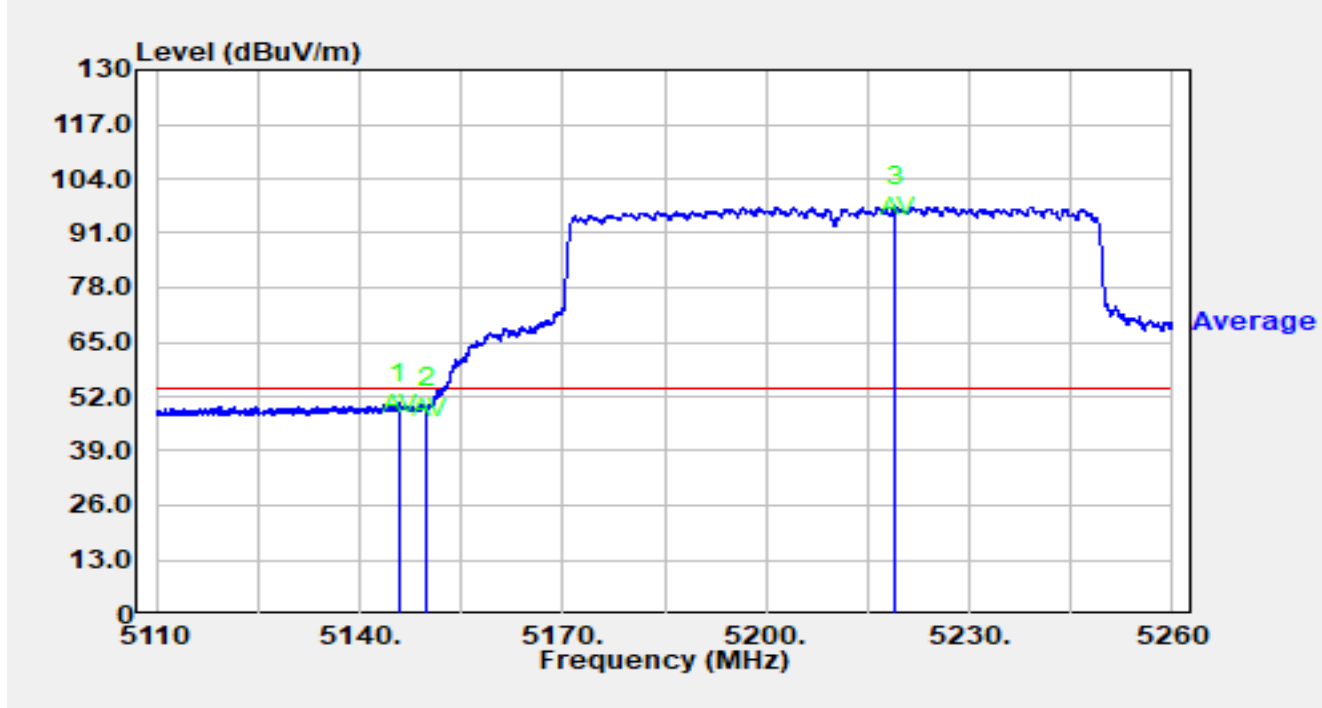


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.880	34.45	15.99	50.44	-3.56	54.00	Average
2		5150.000	33.30	16.00	49.29	-4.71	54.00	Average
3		5219.080	81.55	15.86	97.41	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

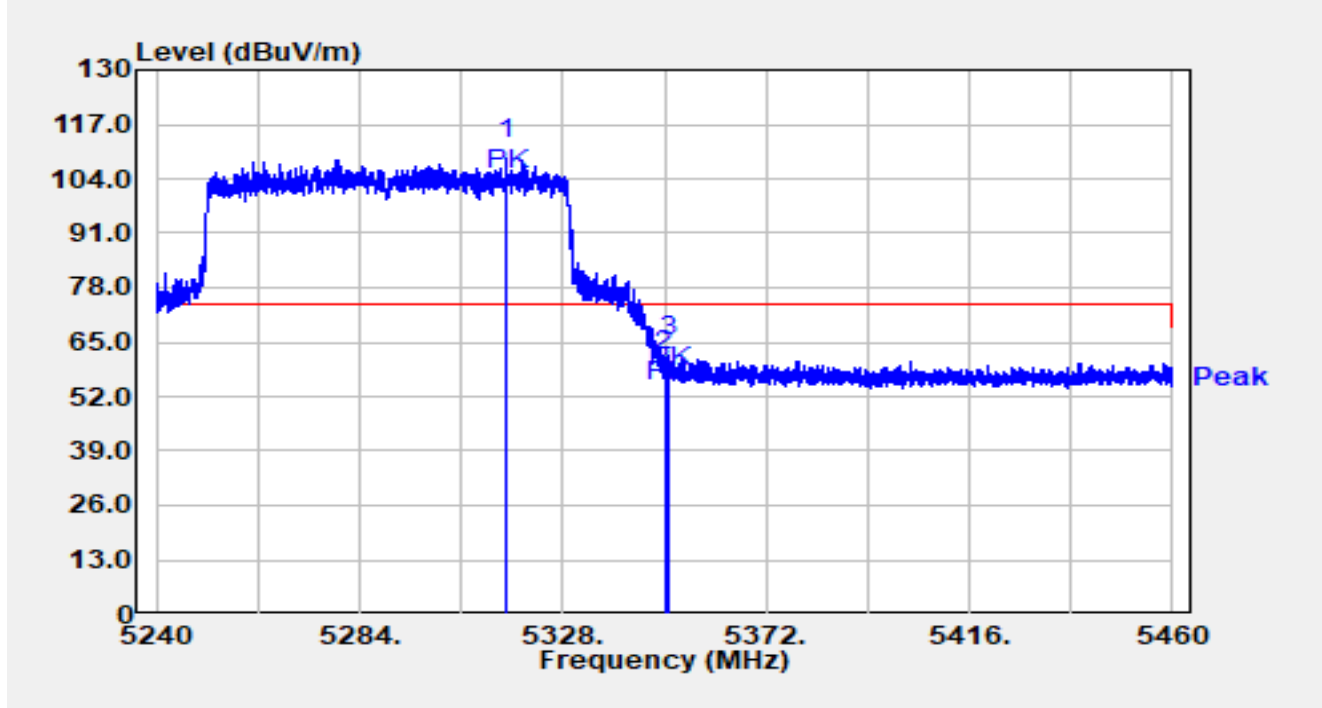


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5315.768	92.90	15.78	108.69	N/A	N/A	Peak
2		5350.000	42.43	15.68	58.11	-15.89	74.00	Peak
3	*	5350.968	46.08	15.68	61.76	-12.24	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

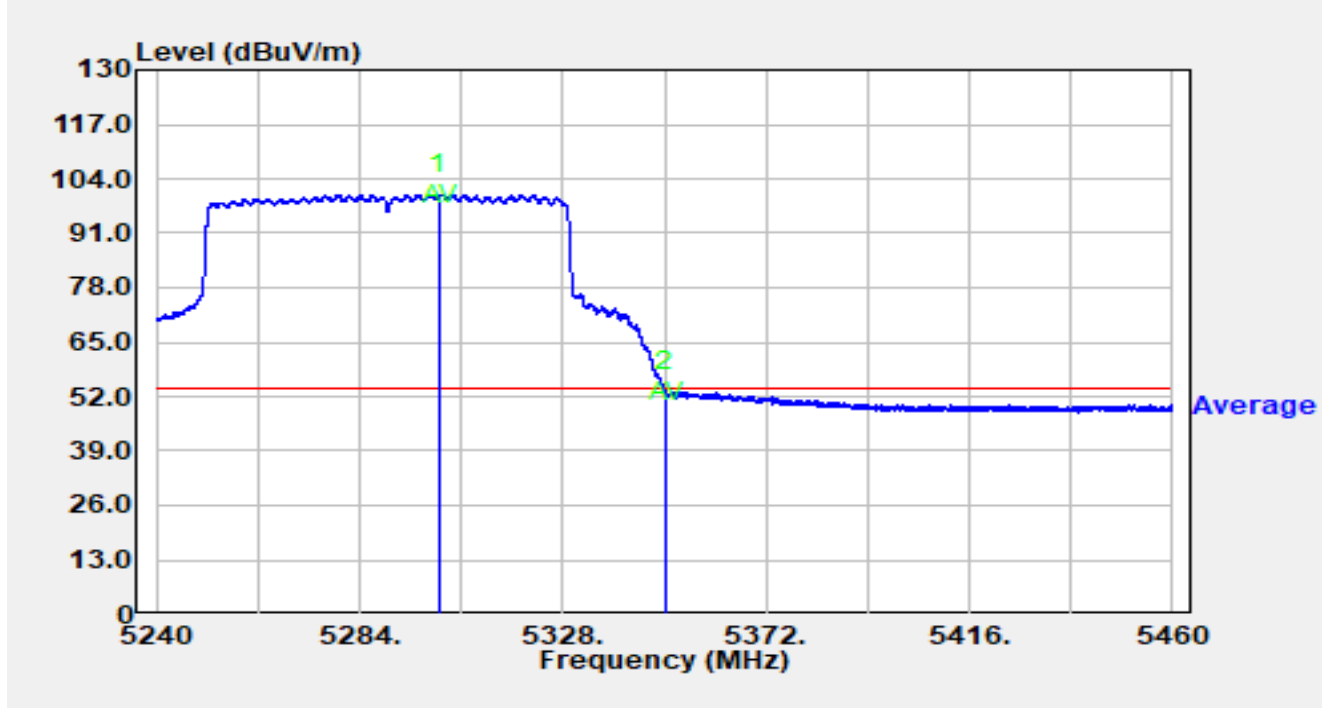


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5301.138	84.49	15.76	100.26	N/A	N/A	Average
2	*	5350.000	37.79	15.68	53.47	-0.53	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

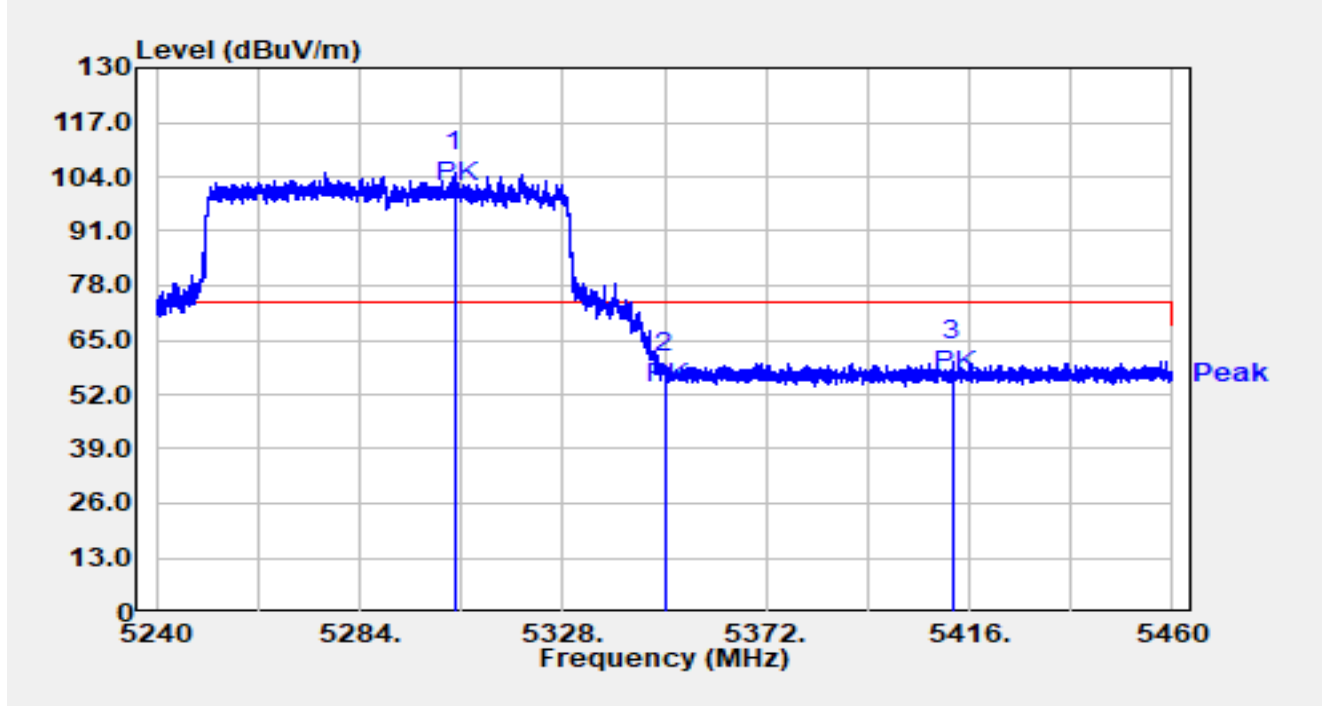


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5304.592	89.28	15.76	105.04	N/A	N/A	Peak
2		5350.000	41.28	15.68	56.96	-17.04	74.00	Peak
3	*	5412.370	44.12	15.80	59.92	-14.08	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

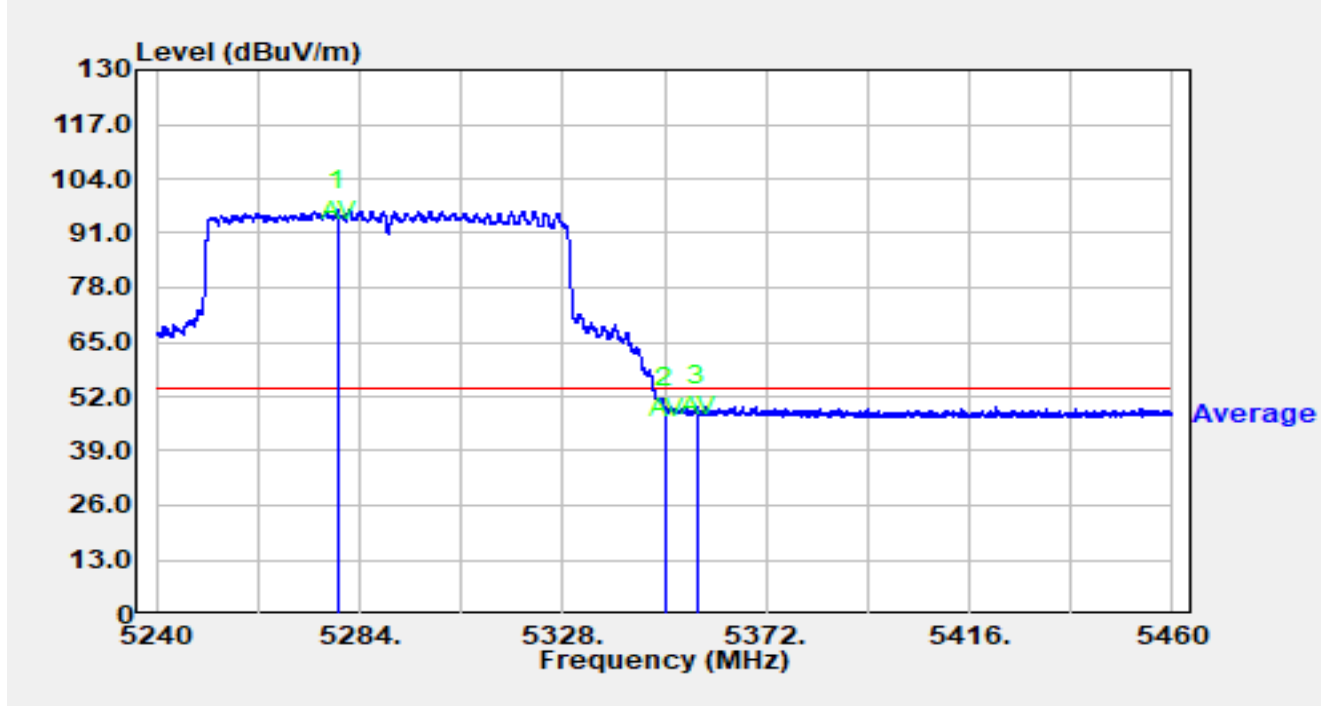


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5279.182	80.77	15.80	96.57	N/A	N/A	Average
2		5350.000	33.73	15.68	49.41	-4.59	54.00	Average
3	*	5357.194	34.01	15.66	49.67	-4.33	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

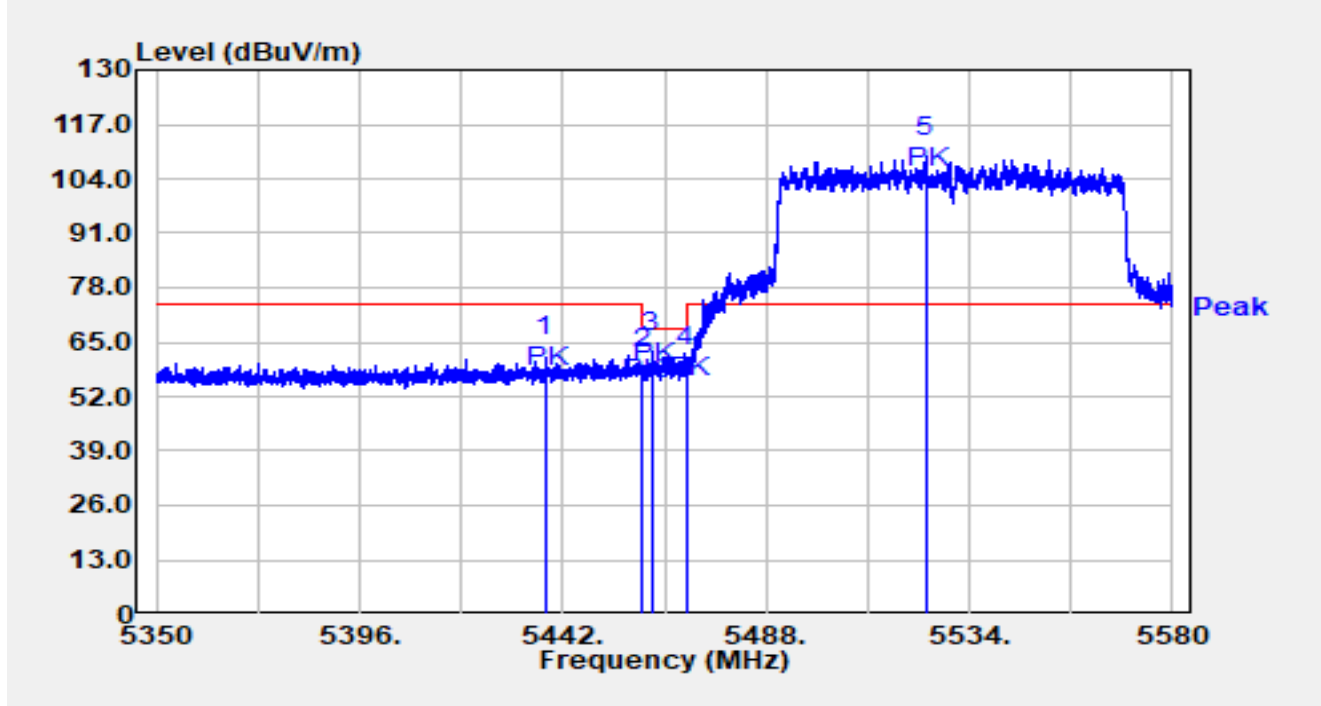


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5438.159	45.69	15.86	61.54	-12.46	74.00	Peak
2		5460.000	42.43	16.02	58.45	-9.75	68.20	Peak
3	*	5462.102	46.60	16.01	62.61	-5.59	68.20	Peak
4		5470.000	43.21	15.98	59.19	-9.01	68.20	Peak
5		5524.110	93.07	16.16	109.23	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

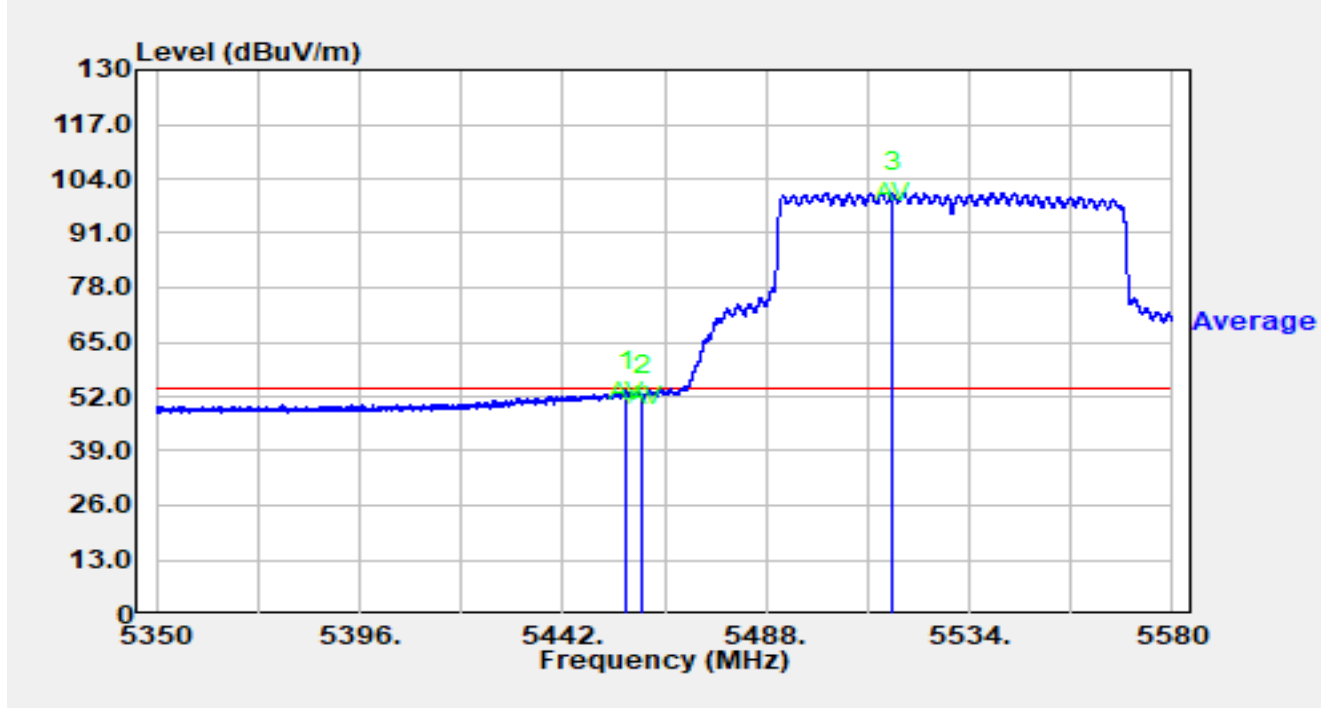


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5456.329	37.32	16.04	53.36	-0.64	54.00	Average
2		5460.000	36.05	16.02	52.07	-1.93	54.00	Average
3		5516.566	84.45	16.19	100.64	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

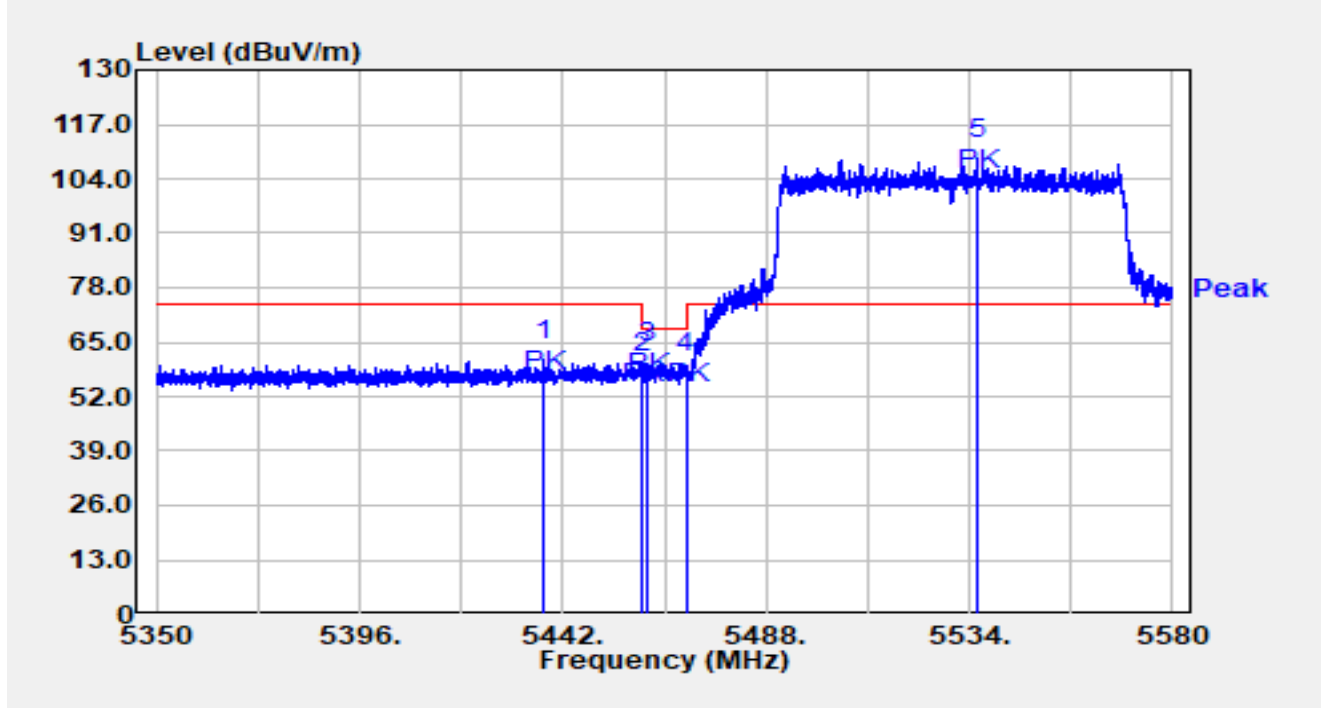


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5437.814	44.88	15.86	60.73	-13.27	74.00	Peak
2		5460.000	41.73	16.02	57.75	-10.45	68.20	Peak
3	*	5461.182	44.01	16.02	60.03	-8.17	68.20	Peak
4		5470.000	41.56	15.98	57.54	-10.66	68.20	Peak
5		5535.840	92.73	16.16	108.89	N/A	N/A	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

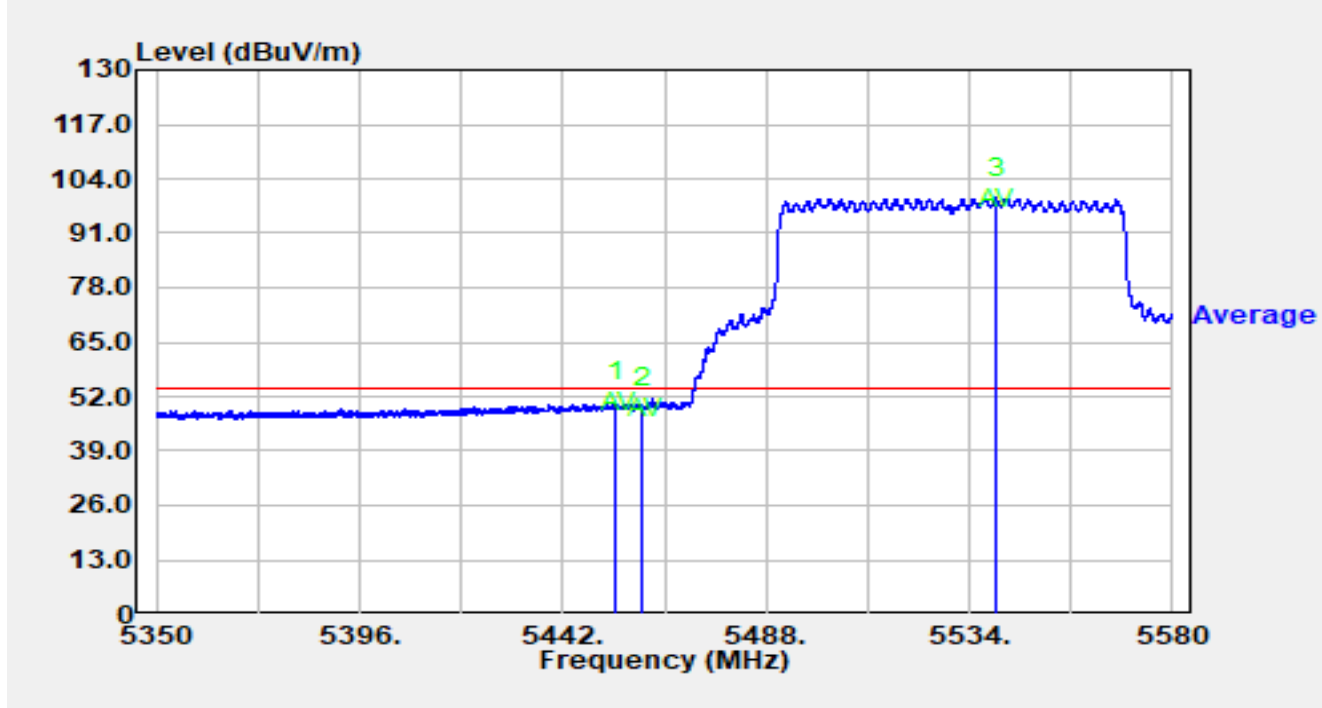


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5454.075	34.50	16.04	50.53	-3.47	54.00	Average
2		5460.000	33.31	16.02	49.33	-4.67	54.00	Average
3		5540.095	83.28	16.17	99.45	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5610MHz		

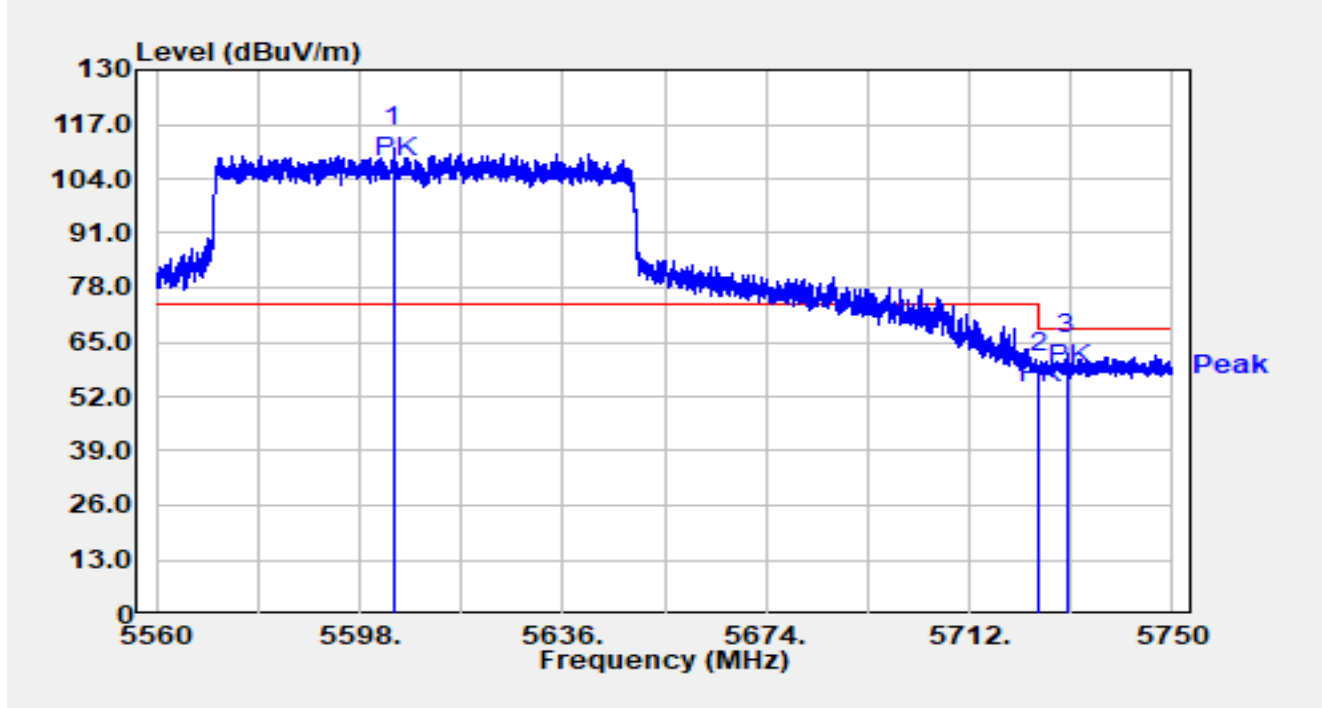


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5604.365	95.04	16.44	111.48	N/A	N/A	Peak
2		5725.000	40.69	16.92	57.61	-10.59	68.20	Peak
3	*	5730.221	45.15	16.94	62.08	-6.12	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5610MHz		

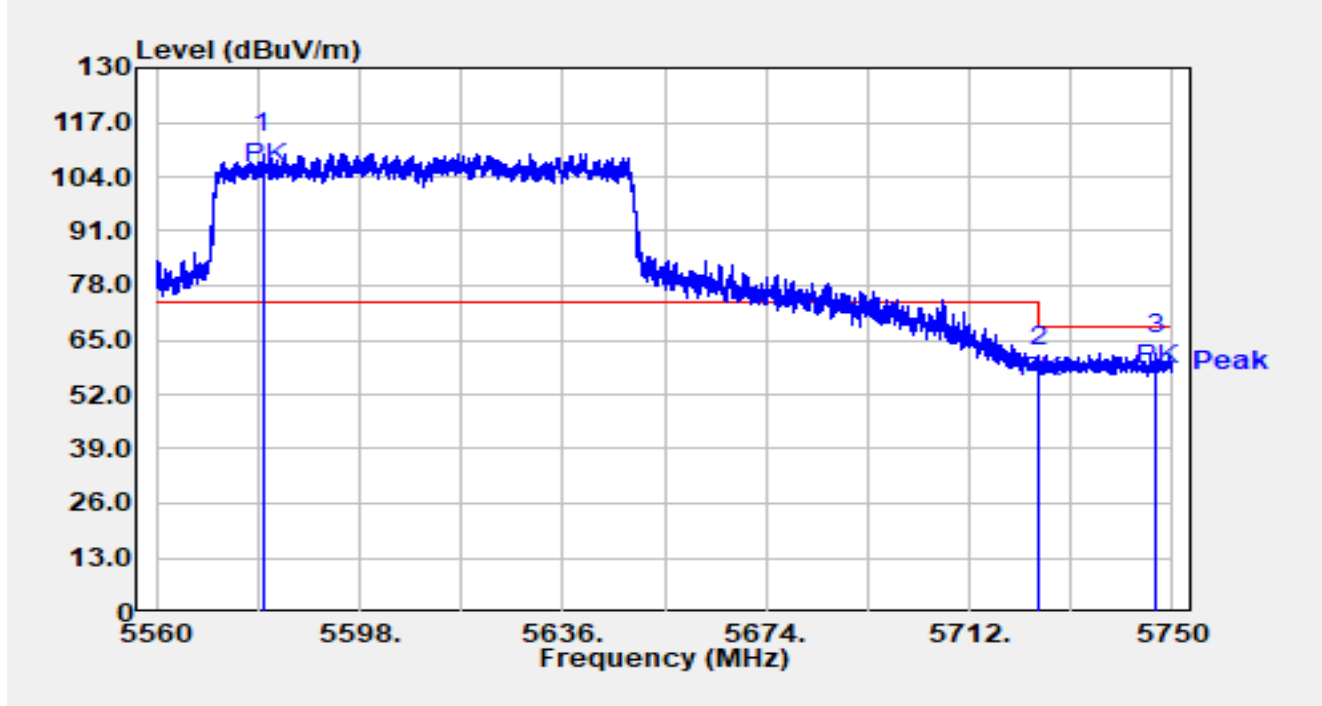


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5580.007	93.13	16.42	109.55	N/A	N/A	Peak
2		5725.000	41.73	16.92	58.65	-9.55	68.20	Peak
3	*	5746.846	44.83	16.97	61.81	-6.39	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5775MHz		

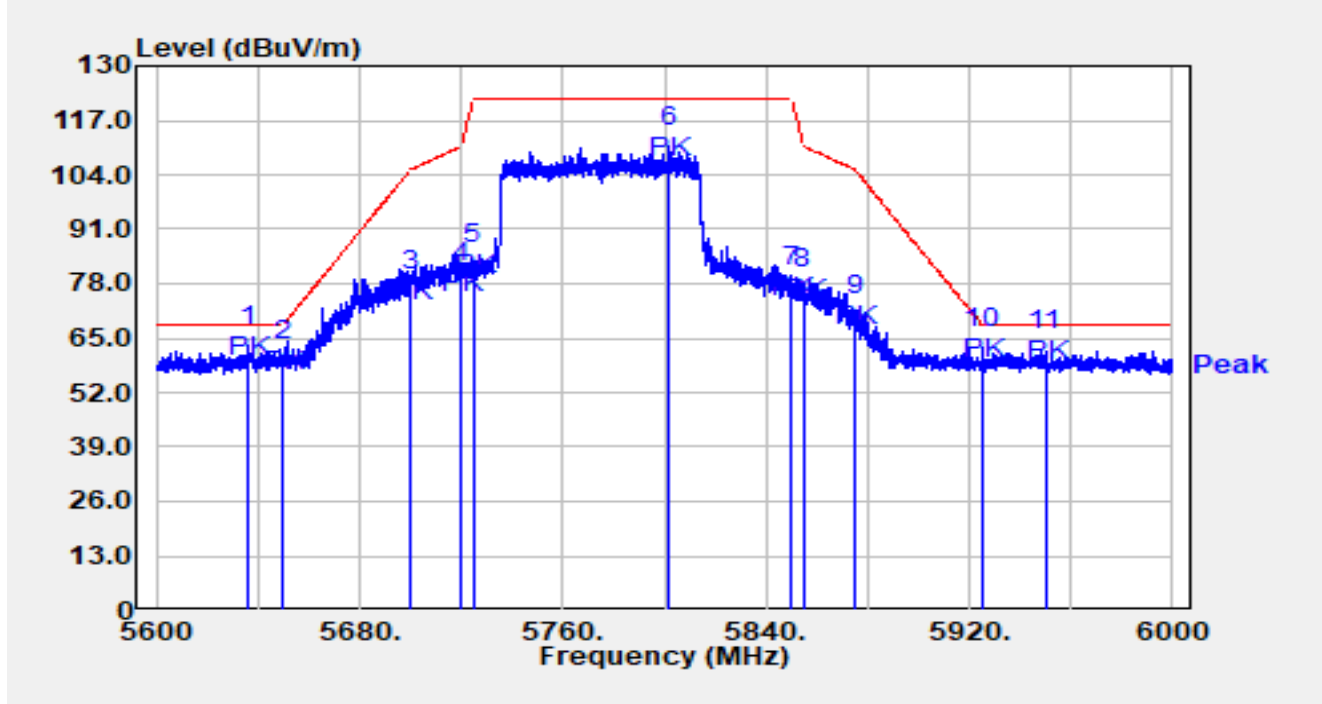

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5636.240	46.58	16.60	63.18	-5.02	68.20	Peak
2		5650.000	42.95	16.65	59.60	-8.60	68.20	Peak
3		5700.000	59.62	16.81	76.43	-28.77	105.20	Peak
4		5720.000	61.13	16.90	78.04	-32.76	110.80	Peak
5		5725.000	65.79	16.92	82.71	-39.49	122.20	Peak
6		5802.000	93.34	17.32	110.67	N/A	N/A	Peak
7		5850.000	60.17	17.31	77.48	-44.72	122.20	Peak
8		5855.000	59.28	17.32	76.60	-34.20	110.80	Peak
9		5875.000	53.17	17.38	70.54	-34.66	105.20	Peak
10		5925.000	45.16	17.36	62.52	-5.68	68.20	Peak
11		5950.000	44.57	17.45	62.02	-6.18	68.20	Peak


Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dB μ V/m) = Reading (dB μ V) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5775MHz		

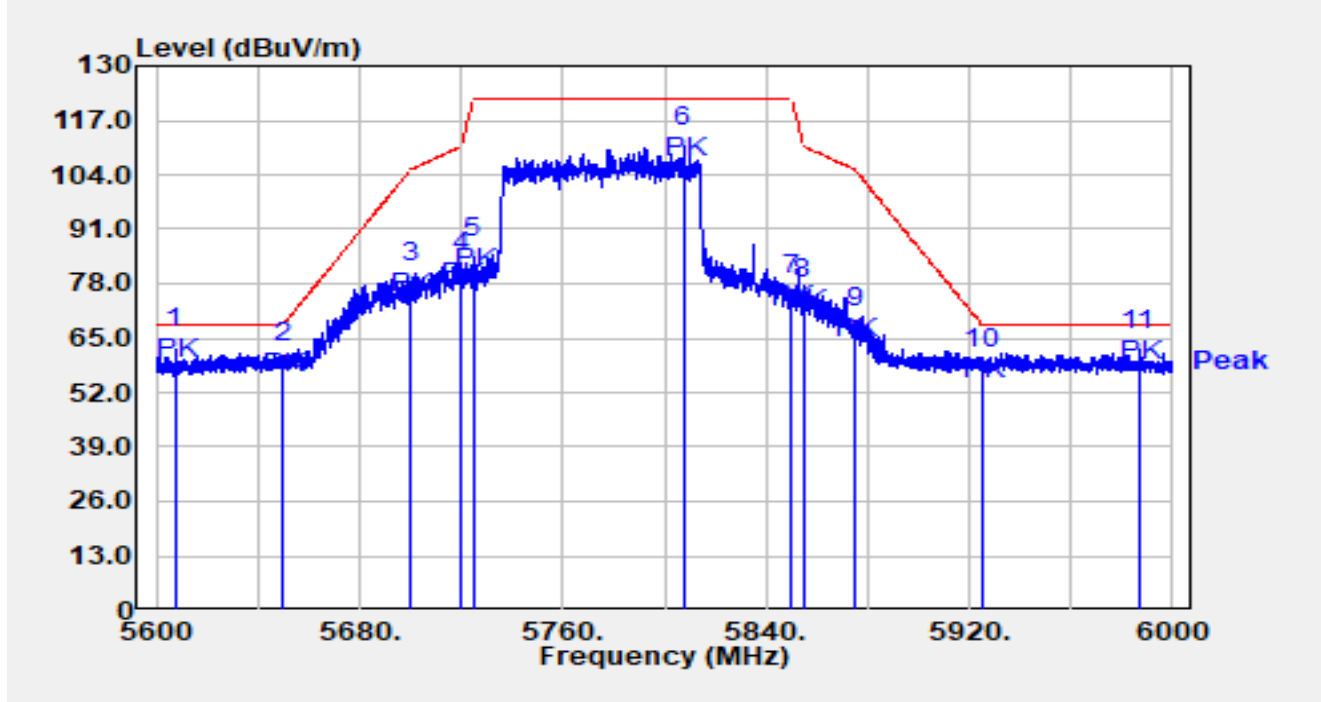

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5607.600	45.96	16.45	62.41	-5.79	68.20	Peak
2		5650.000	42.35	16.65	59.00	-9.20	68.20	Peak
3		5700.000	61.53	16.81	78.34	-26.86	105.20	Peak
4		5720.000	64.03	16.90	80.93	-29.87	110.80	Peak
5		5725.000	67.20	16.92	84.12	-38.08	122.20	Peak
6		5807.800	93.40	17.36	110.75	N/A	N/A	Peak
7		5850.000	57.83	17.31	75.14	-47.06	122.20	Peak
8		5855.000	57.05	17.32	74.37	-36.43	110.80	Peak
9		5875.000	50.10	17.38	67.47	-37.73	105.20	Peak
10		5925.000	40.50	17.36	57.86	-10.34	68.20	Peak
11		5986.920	44.62	17.50	62.12	-6.08	68.20	Peak


Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dB μ V/m) = Reading (dB μ V) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5180MHz		

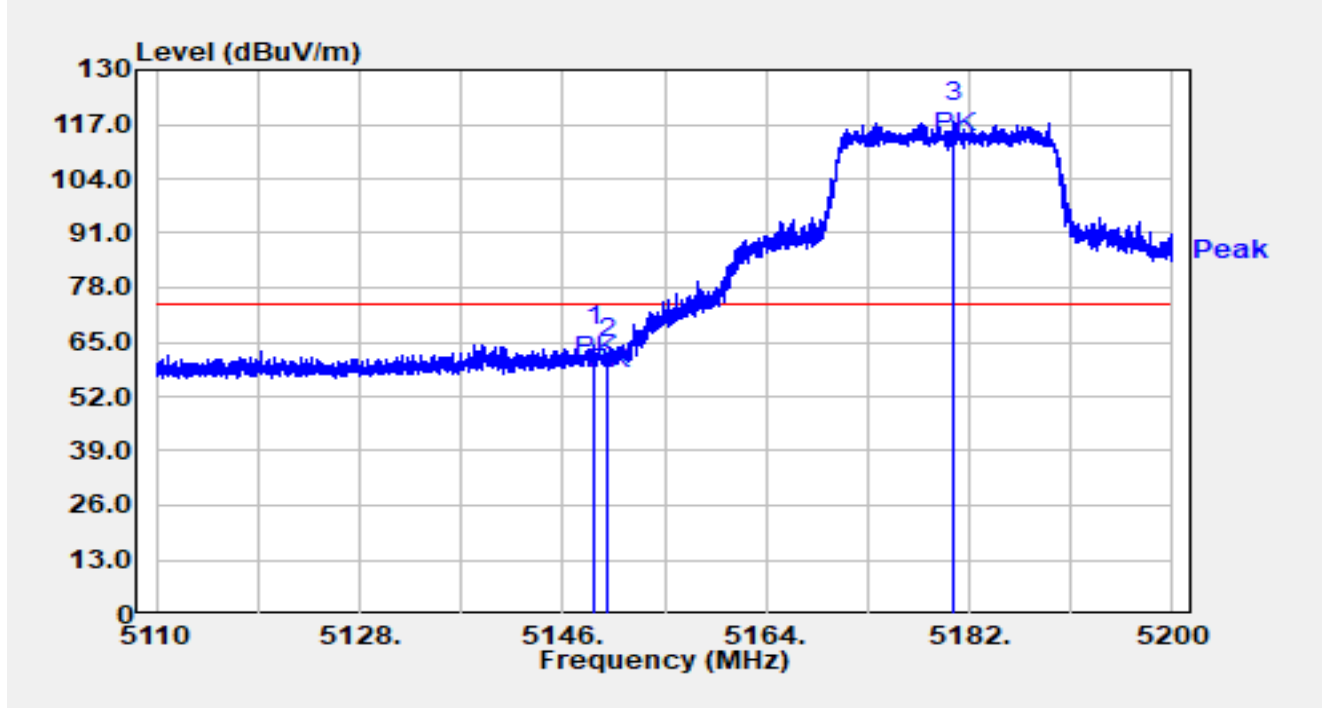


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.835	48.24	16.00	64.24	-9.76	74.00	Peak
2		5150.000	45.20	16.00	61.20	-12.80	74.00	Peak
3		5180.686	101.61	15.93	117.54	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5180MHz		

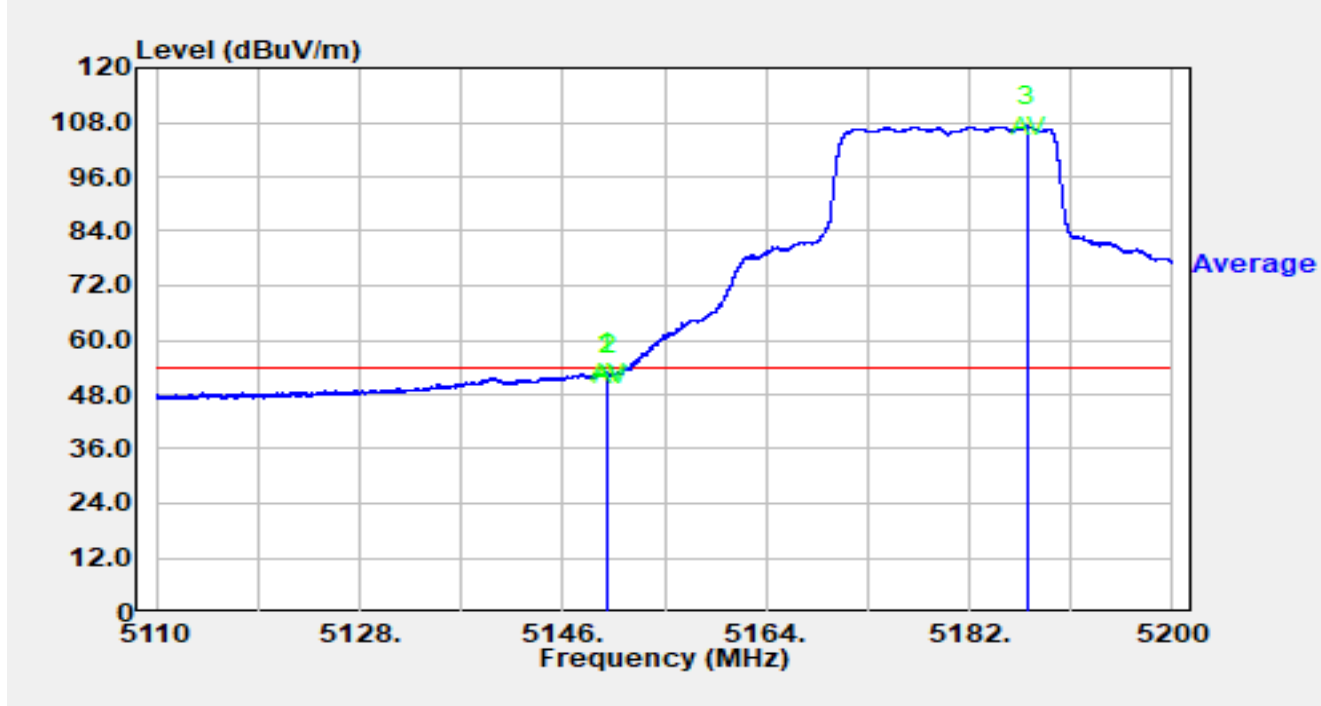


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.843	36.87	16.00	52.86	-1.14	54.00	Average
2		5150.000	36.42	16.00	52.41	-1.59	54.00	Average
3		5187.076	91.18	15.94	107.12	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5180MHz		

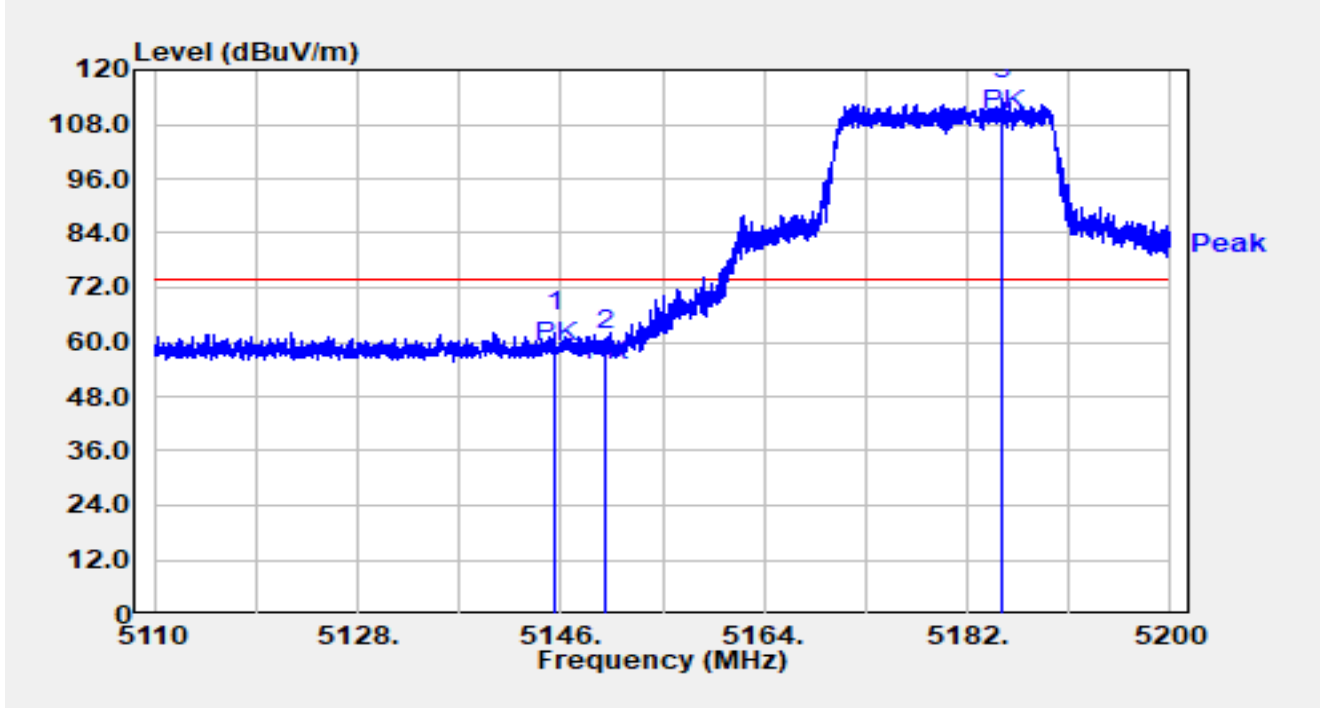


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.514	46.08	15.99	62.07	-11.93	74.00	Peak
2		5150.000	42.26	16.00	58.25	-15.75	74.00	Peak
3		5185.114	97.65	15.93	113.59	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5180MHz		

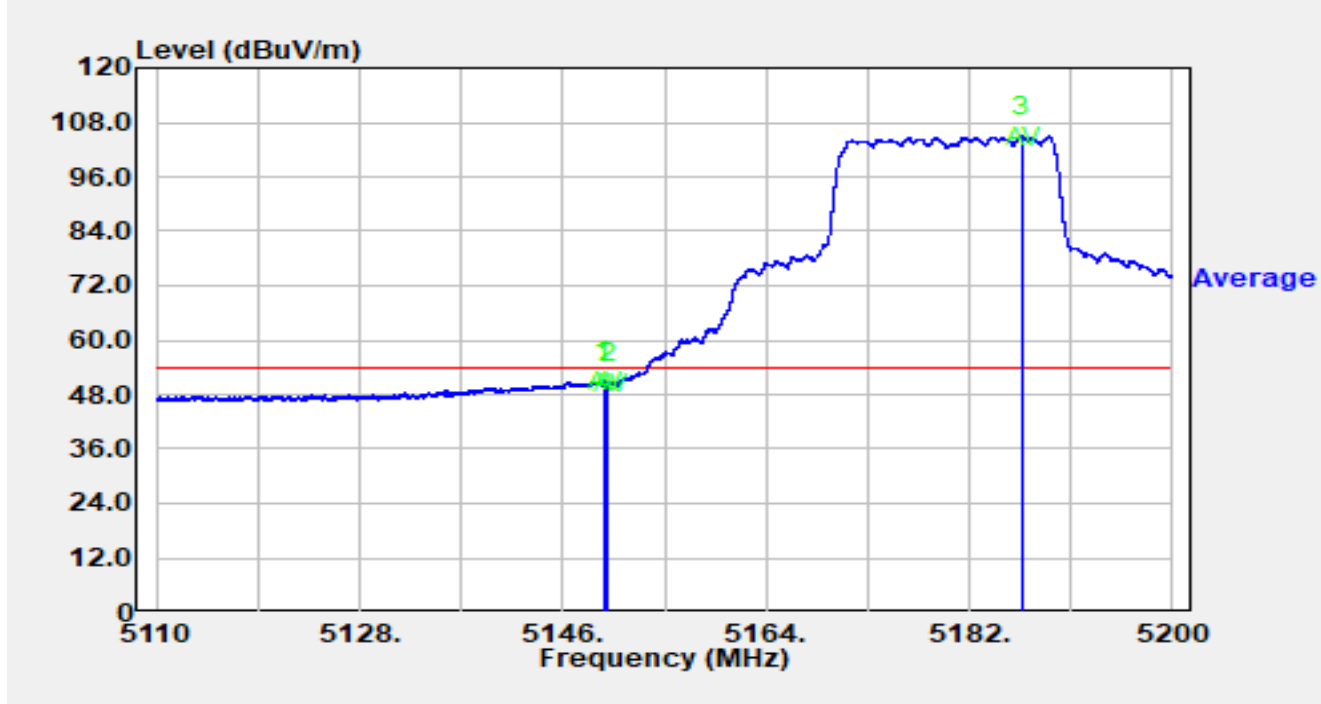


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.609	34.98	16.00	50.98	-3.02	54.00	Average
2		5150.000	34.64	16.00	50.63	-3.37	54.00	Average
3		5186.707	89.07	15.94	105.01	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5320MHz		

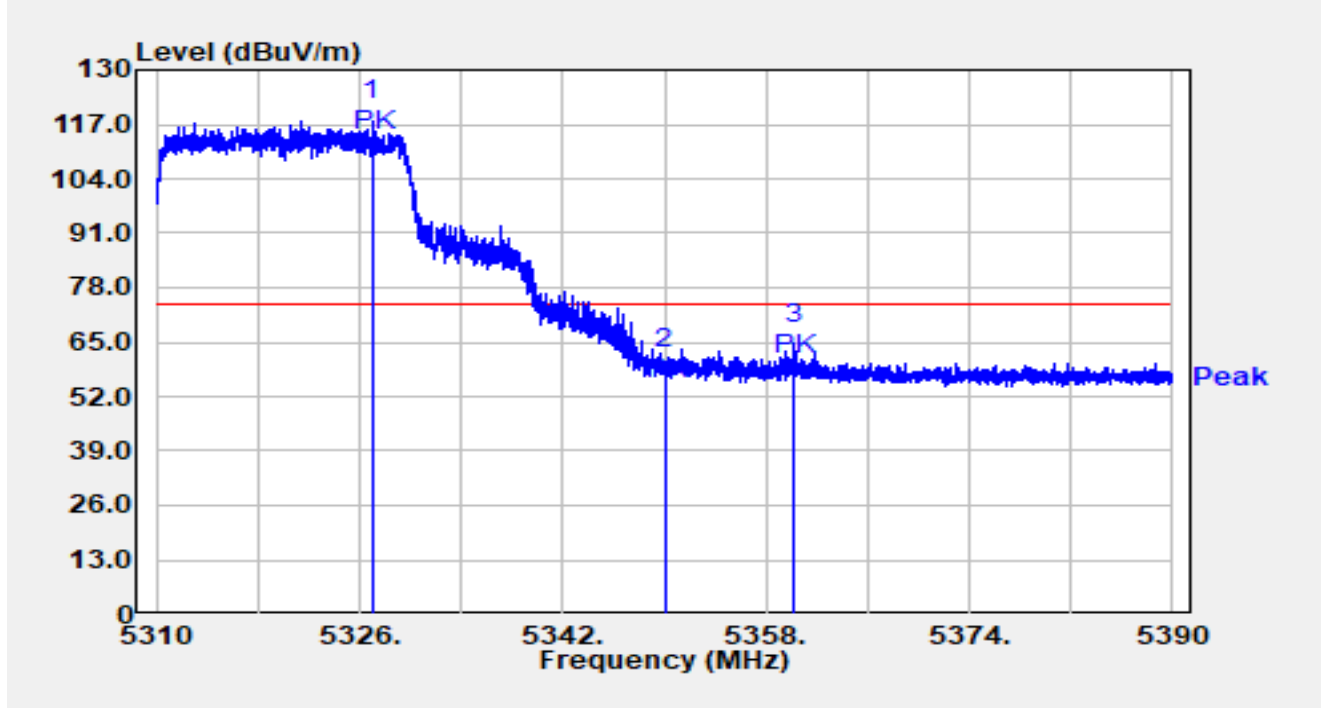


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.016	102.09	15.80	117.89	N/A	N/A	Peak
2		5350.000	42.73	15.68	58.41	-15.59	74.00	Peak
3	*	5360.184	48.92	15.65	64.57	-9.43	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5320MHz		

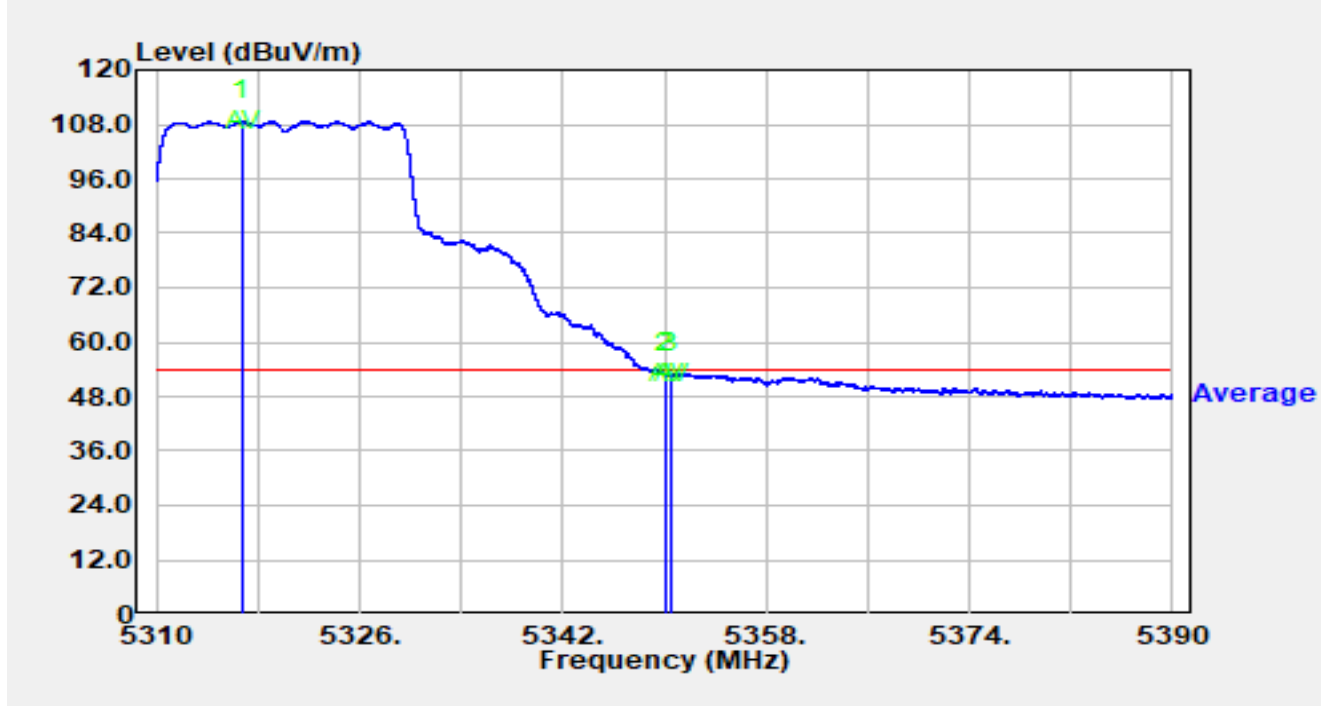


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5316.720	92.95	15.79	108.73	N/A	N/A	Average
2		5350.000	37.42	15.68	53.10	-0.90	54.00	Average
3	*	5350.448	37.51	15.68	53.19	-0.81	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5320MHz		

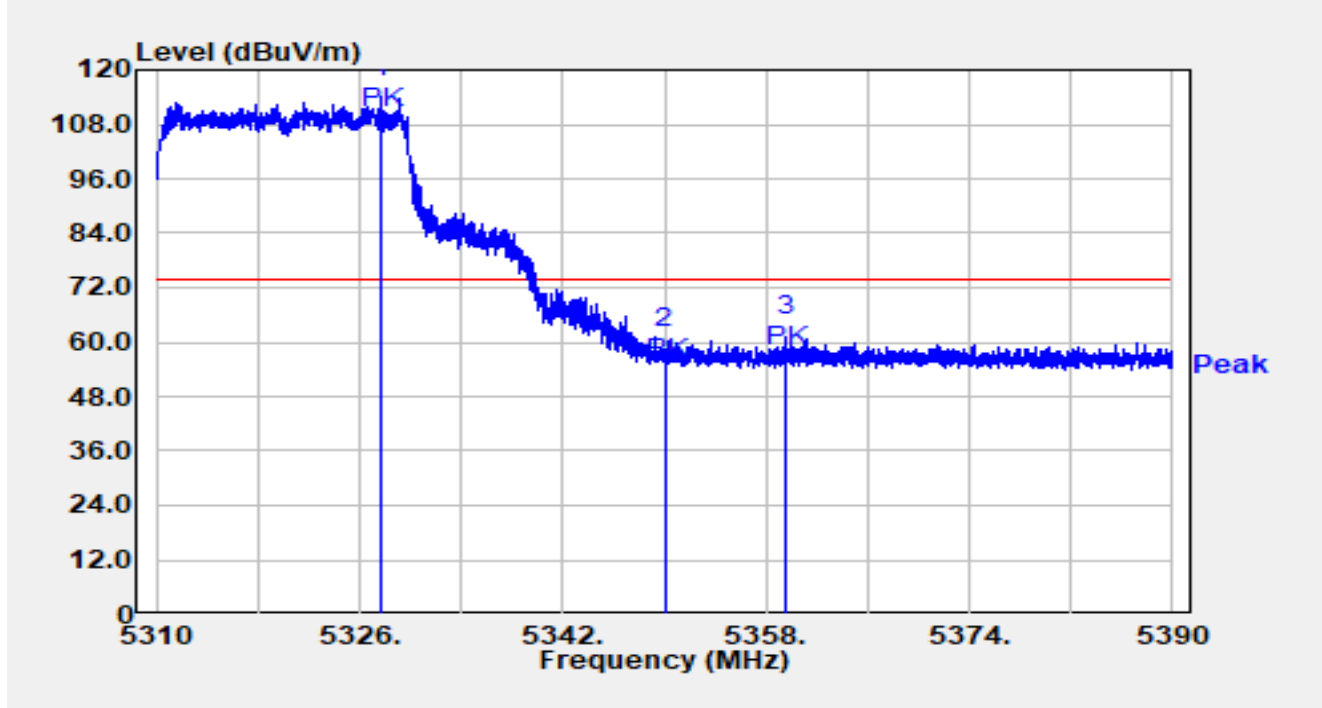


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.736	98.31	15.80	114.11	N/A	N/A	Peak
2		5350.000	42.83	15.68	58.51	-15.49	74.00	Peak
3	*	5359.552	45.62	15.65	61.27	-12.73	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5320MHz		

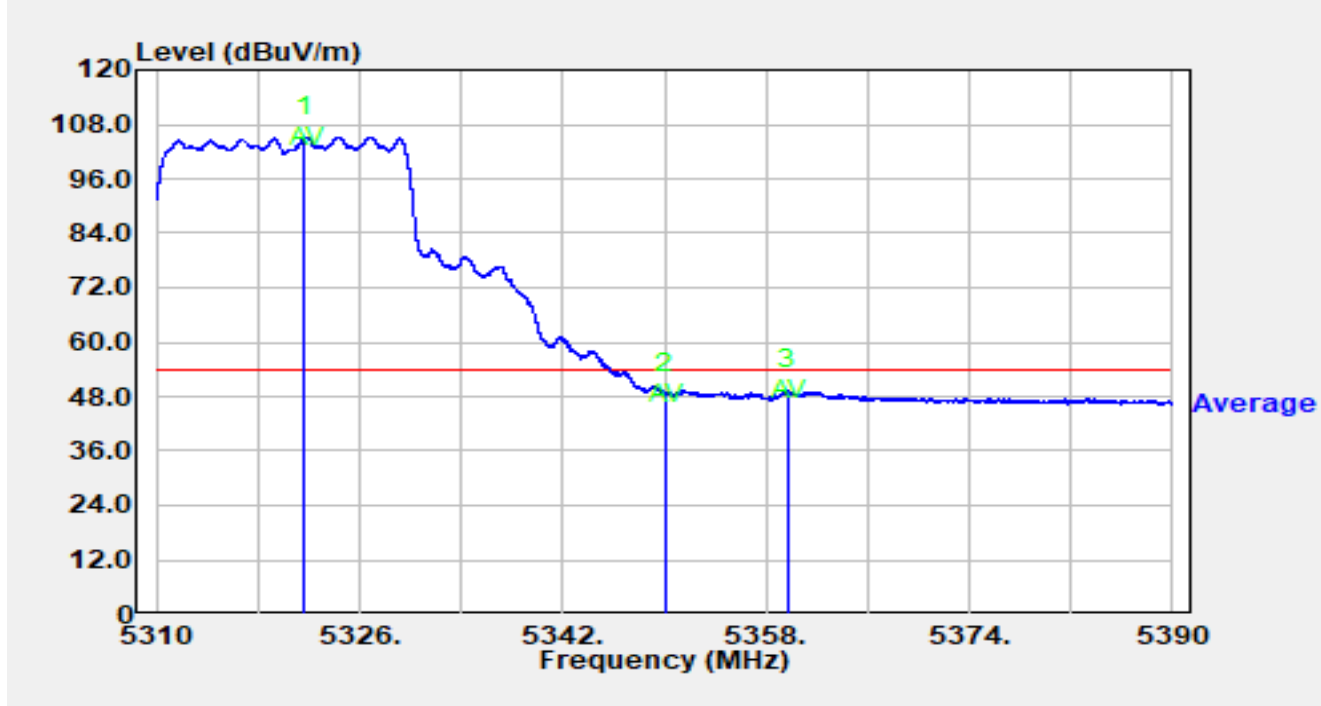


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.704	89.37	15.80	105.17	N/A	N/A	Average
2		5350.000	33.02	15.68	48.70	-5.30	54.00	Average
3	*	5359.736	33.74	15.65	49.39	-4.61	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

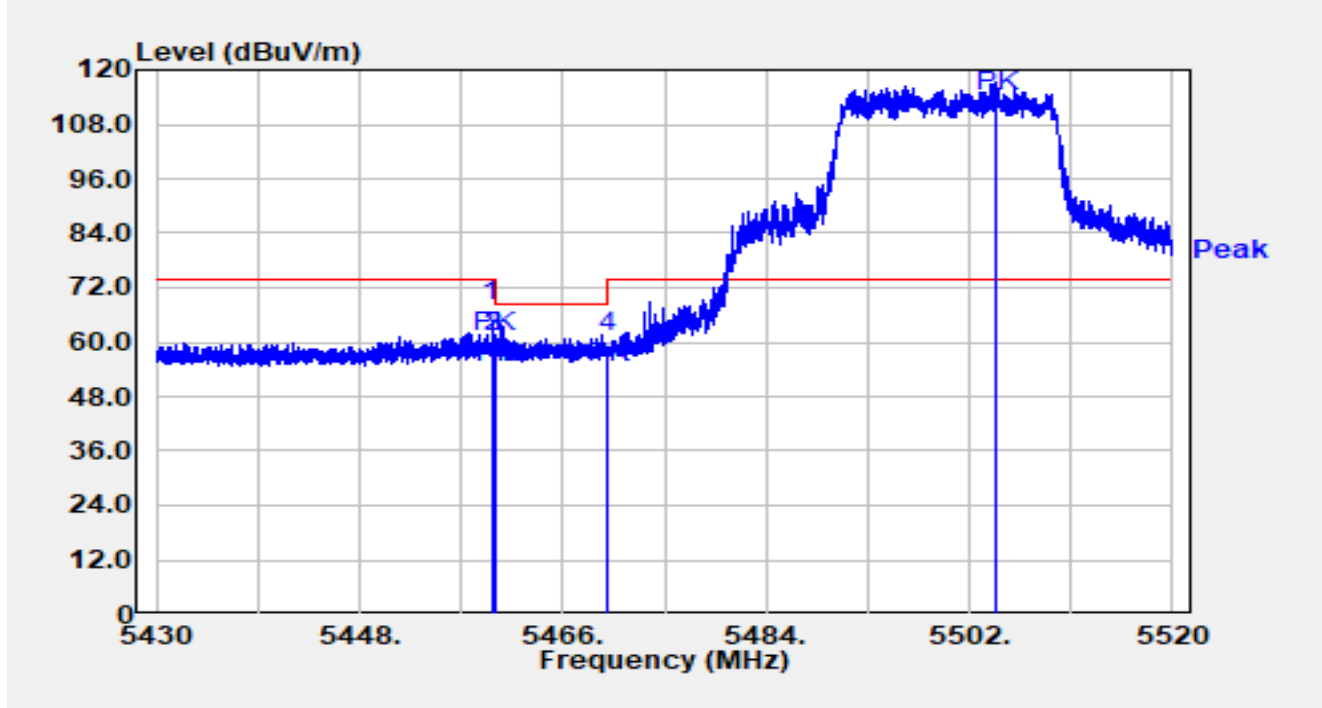


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.763	48.60	16.02	64.62	-9.38	74.00	Peak
2		5459.997	41.79	16.02	57.81	-16.19	74.00	Peak
3		5460.000	41.79	16.02	57.81	-10.39	68.20	Peak
4		5470.000	41.75	15.98	57.74	-10.46	68.20	Peak
5		5504.250	101.10	16.22	117.32	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

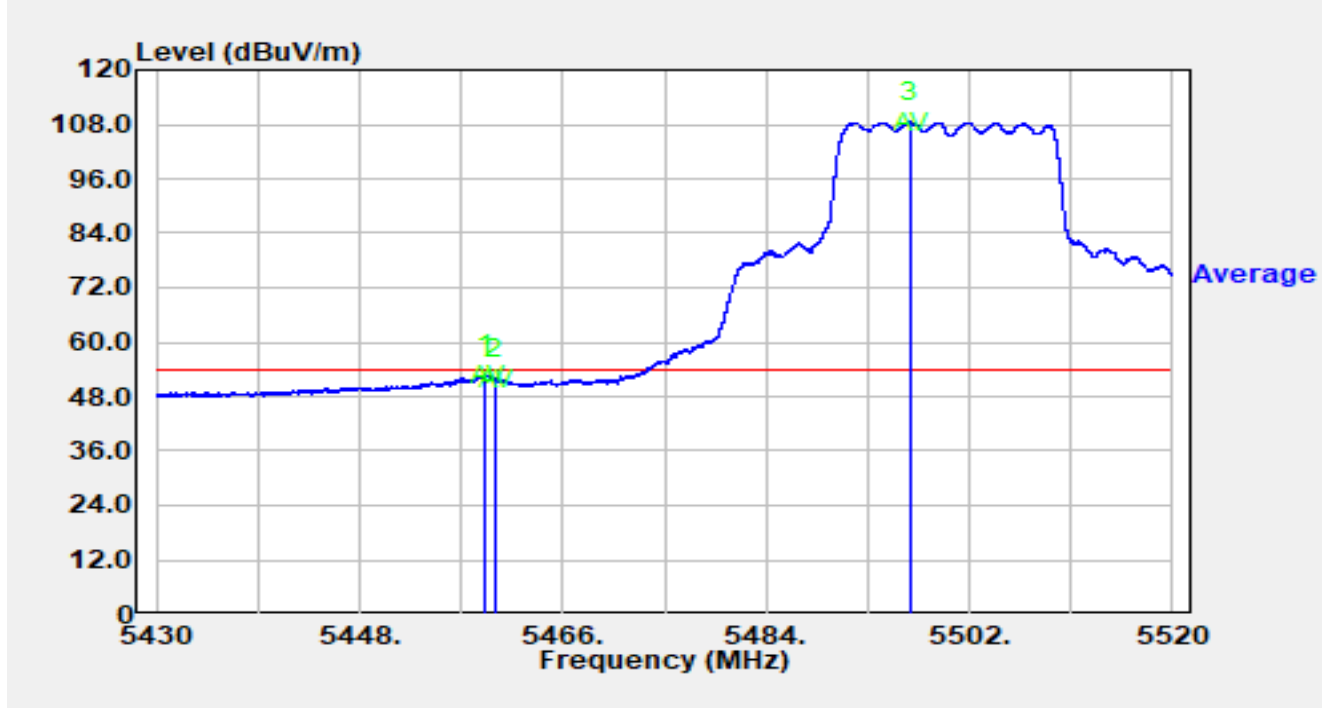


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.178	36.83	16.03	52.86	-1.14	54.00	Average
2		5460.000	35.94	16.02	51.97	-2.03	54.00	Average
3		5496.744	92.40	16.14	108.54	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

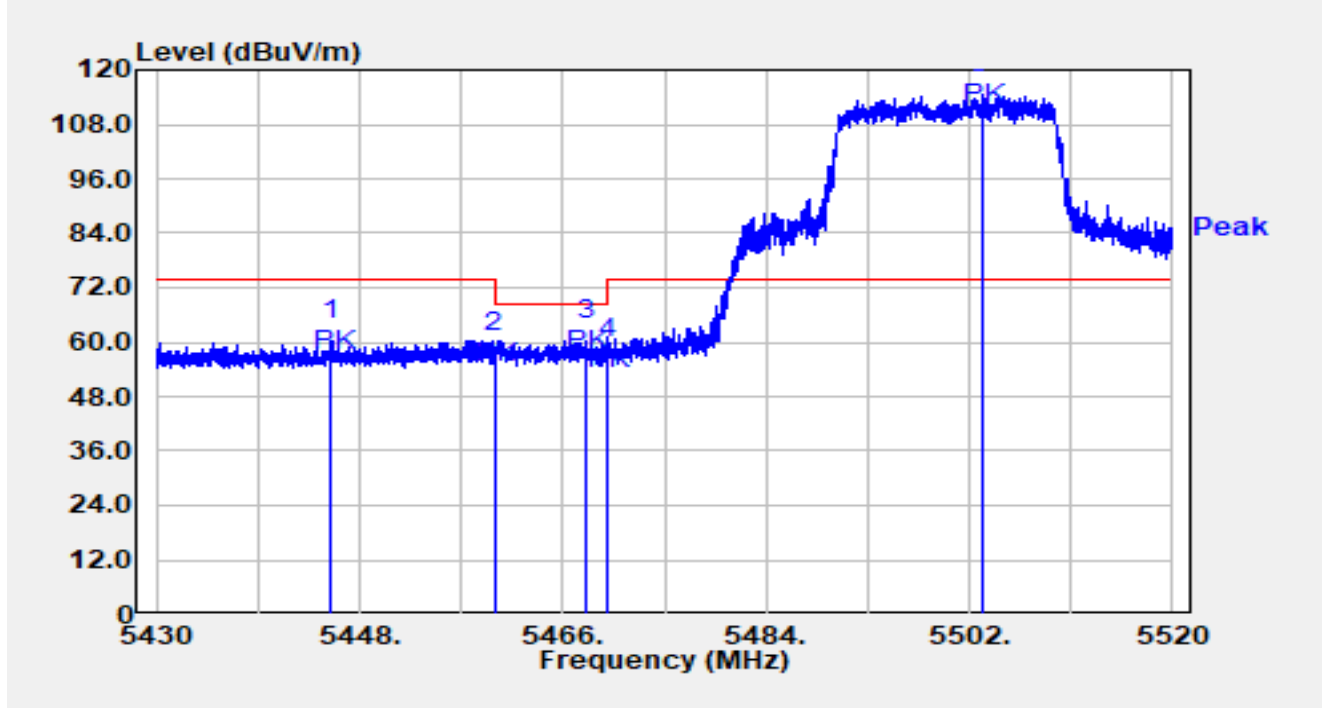


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5445.525	44.33	15.94	60.27	-13.73	74.00	Peak
2		5460.000	41.53	16.02	57.56	-10.64	68.20	Peak
3	*	5468.079	44.39	15.99	60.38	-7.82	68.20	Peak
4		5470.000	40.45	15.98	56.43	-11.77	68.20	Peak
5		5503.152	98.56	16.21	114.77	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-10
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

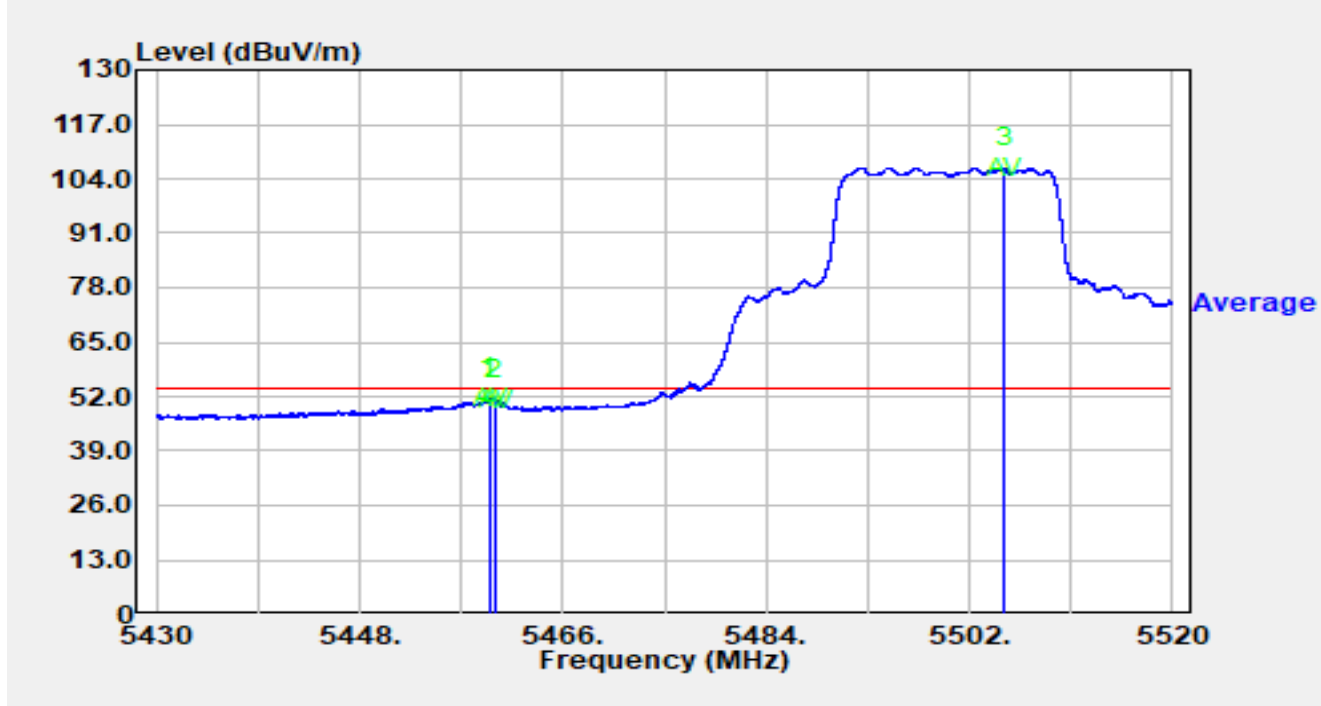


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.529	35.60	16.02	51.62	-2.38	54.00	Average
2		5460.000	35.00	16.02	51.03	-2.97	54.00	Average
3		5505.078	90.28	16.23	106.51	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5700MHz		

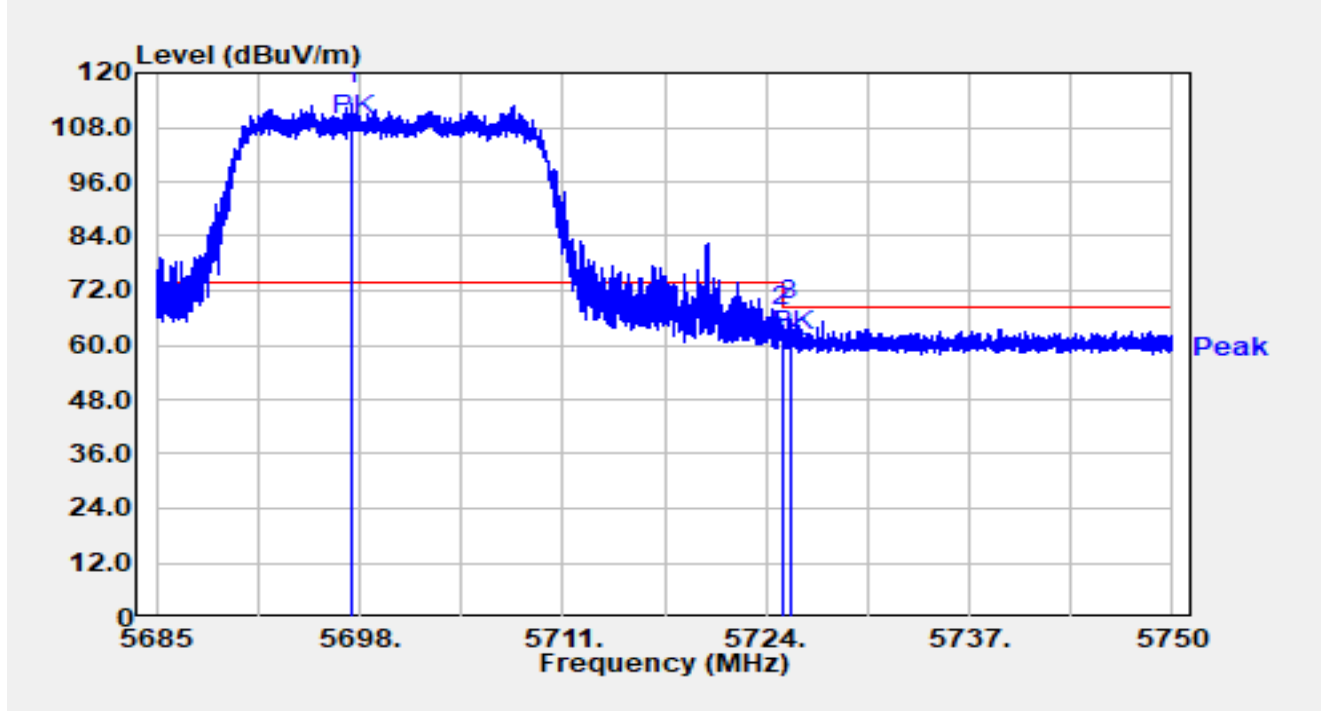


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5697.493	96.27	16.80	113.07	N/A	N/A	Peak
2		5725.000	47.17	16.92	64.09	-4.11	68.20	Peak
3	*	5725.515	48.67	16.93	65.60	-2.60	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5700MHz		

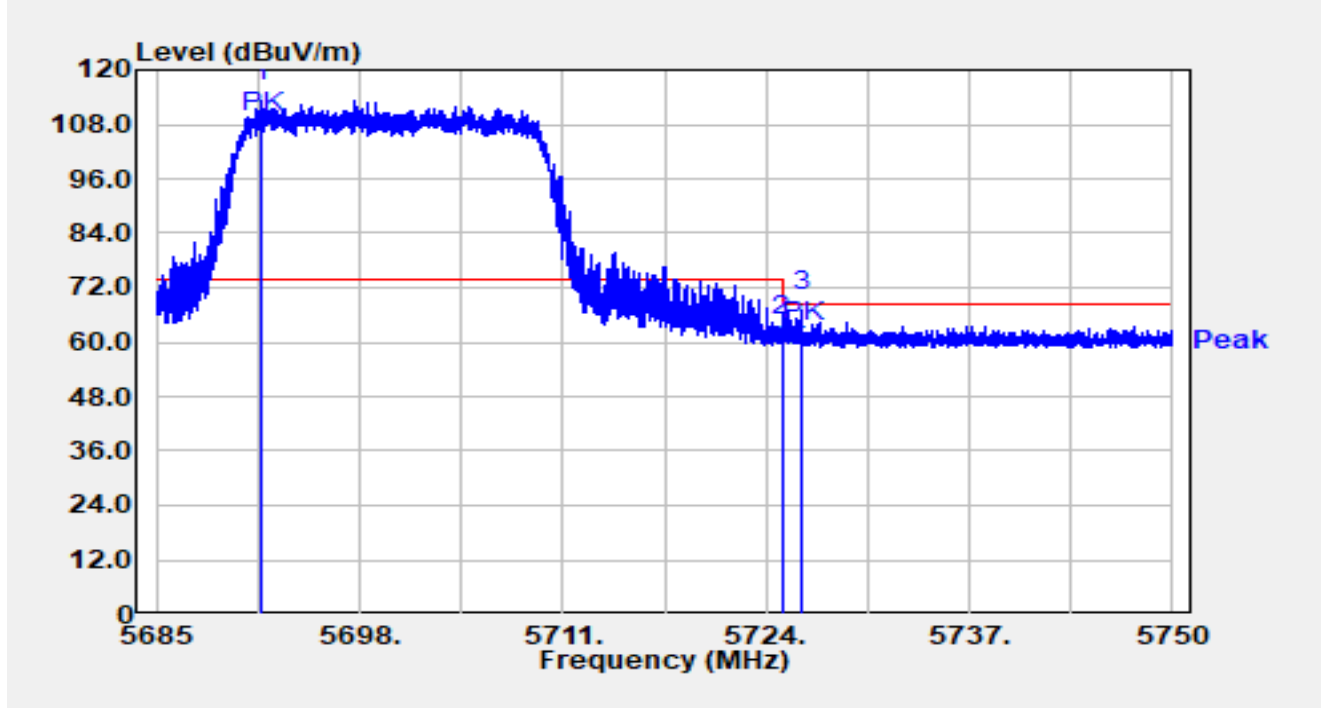


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5691.734	96.37	16.77	113.14	N/A	N/A	Peak
2		5725.000	44.42	16.92	61.34	-6.86	68.20	Peak
3	*	5726.294	50.06	16.93	66.99	-1.21	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5745MHz		

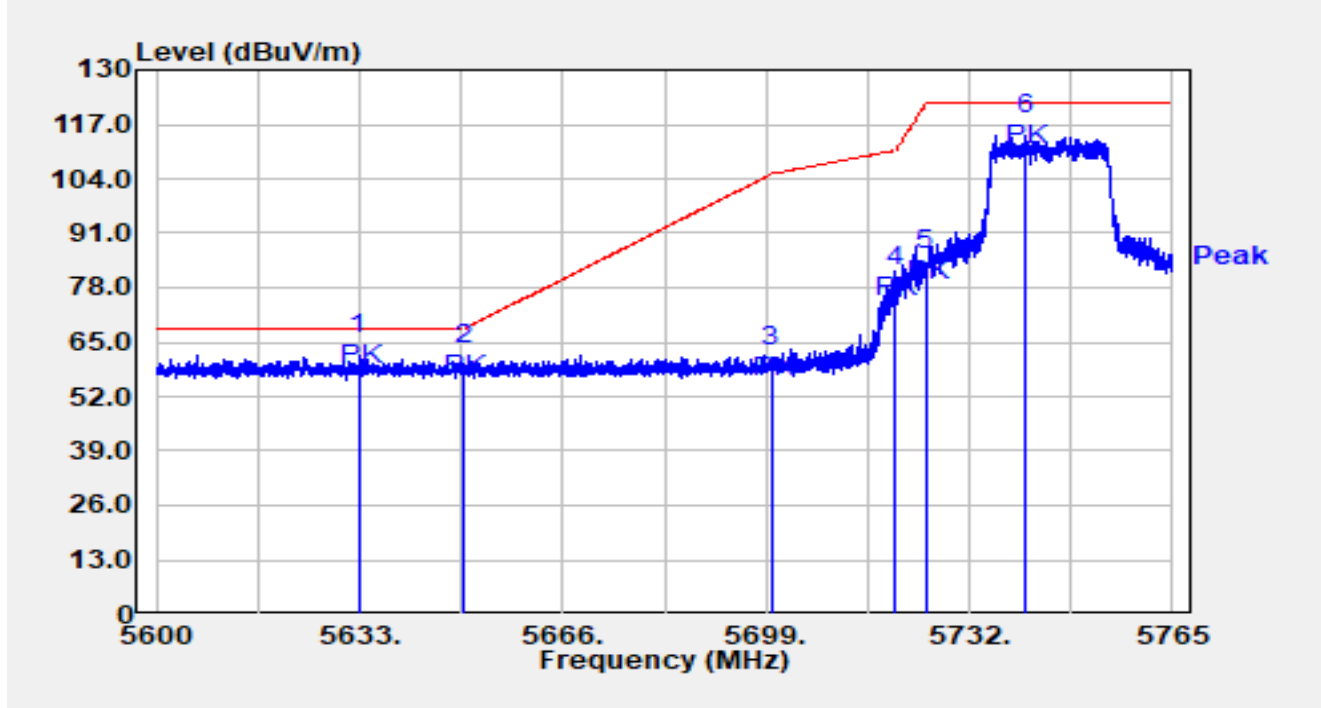


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5632.983	45.24	16.57	61.82	-6.38	68.20	Peak
2		5650.000	42.80	16.65	59.46	-8.74	68.20	Peak
3		5700.000	42.10	16.81	58.91	-46.29	105.20	Peak
4		5720.000	61.48	16.90	78.39	-32.41	110.80	Peak
5		5725.000	65.15	16.92	82.08	-40.12	122.20	Peak
6		5741.207	97.51	16.96	114.47	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5745MHz		

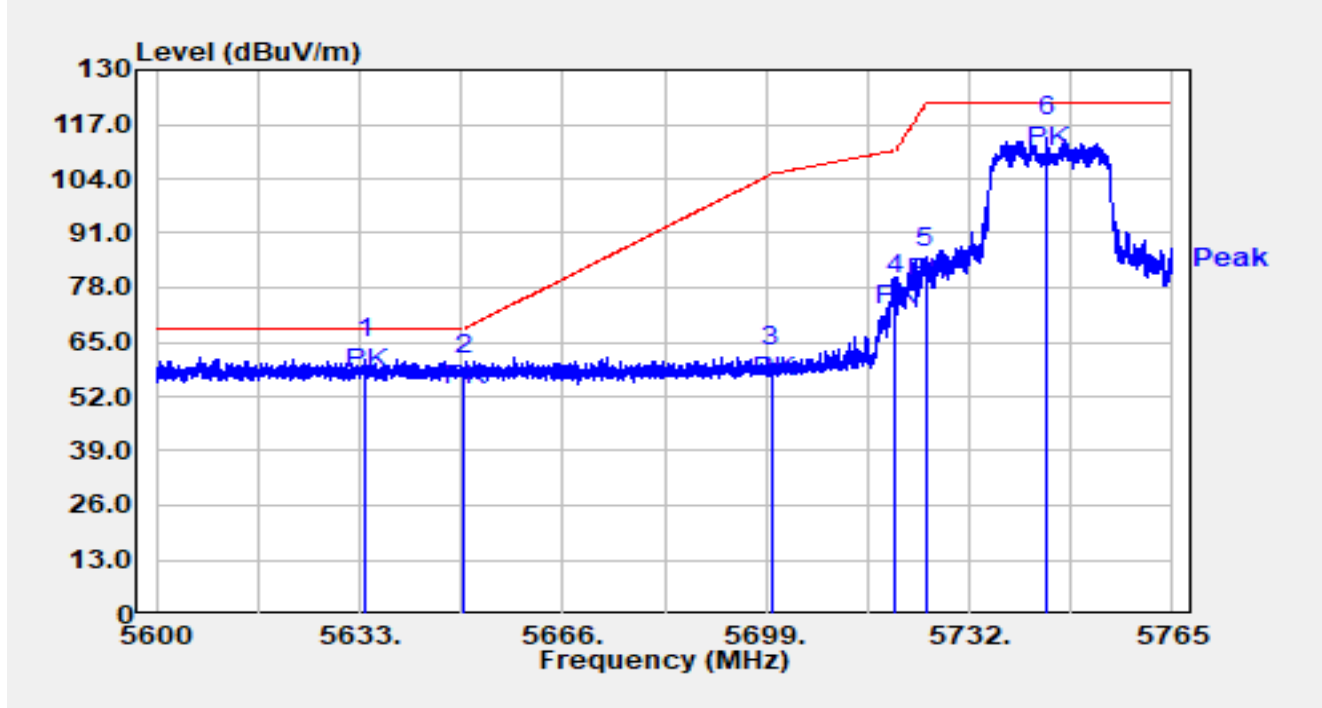


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5633.957	44.49	16.58	61.07	-7.13	68.20	Peak
2		5650.000	40.70	16.65	57.36	-10.84	68.20	Peak
3		5700.000	42.12	16.81	58.94	-46.26	105.20	Peak
4		5720.000	59.42	16.90	76.32	-34.48	110.80	Peak
5		5725.000	65.77	16.92	82.70	-39.50	122.20	Peak
6		5744.589	96.93	16.96	113.89	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5825MHz		

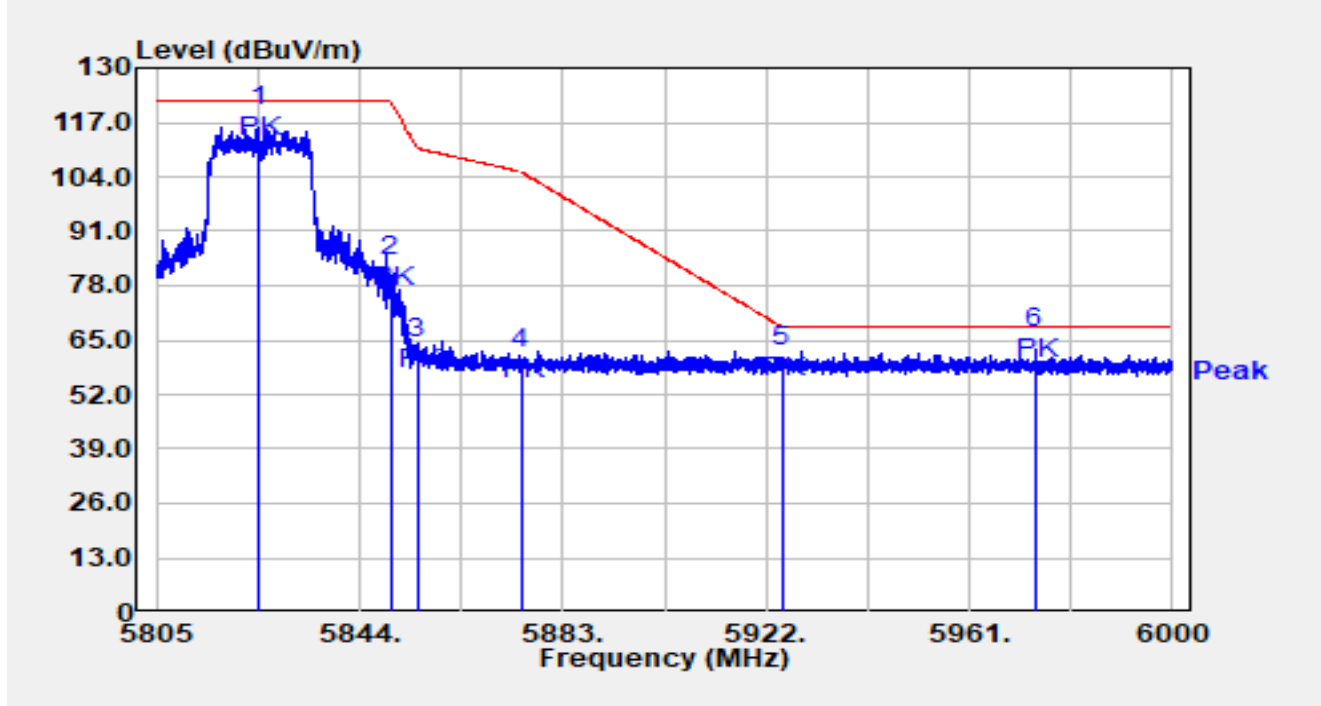


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5824.656	98.59	17.37	115.96	N/A	N/A	Peak
2		5850.000	63.09	17.31	80.40	-41.80	122.20	Peak
3		5855.000	43.35	17.32	60.68	-50.12	110.80	Peak
4		5875.000	40.86	17.38	58.23	-46.97	105.20	Peak
5		5925.000	41.23	17.36	58.59	-9.61	68.20	Peak
6	*	5973.617	45.43	17.55	62.97	-5.23	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-07
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5825MHz		

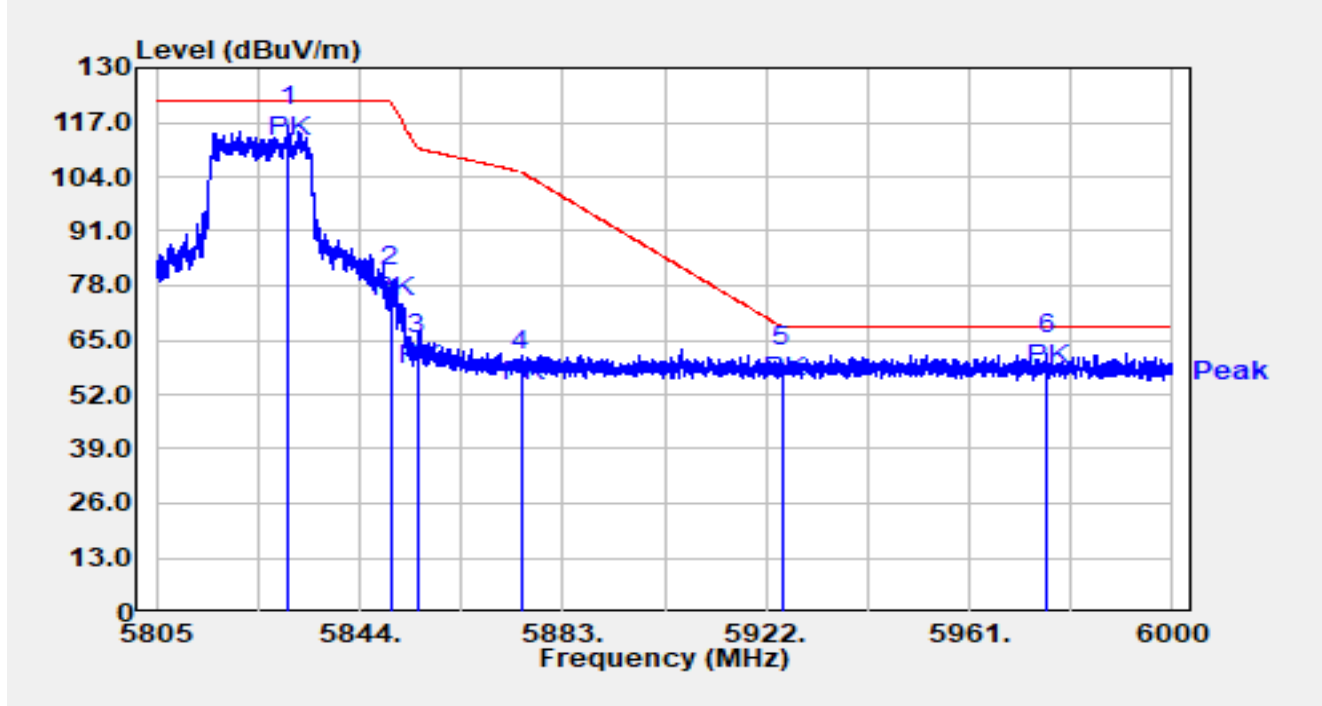


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5830.331	98.89	17.36	116.25	N/A	N/A	Peak
2		5850.000	60.65	17.31	77.96	-44.24	122.20	Peak
3		5855.000	44.21	17.32	61.54	-49.26	110.80	Peak
4		5875.000	40.20	17.38	57.58	-47.62	105.20	Peak
5		5925.000	41.46	17.36	58.82	-9.38	68.20	Peak
6	*	5975.898	44.05	17.57	61.61	-6.59	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5190MHz		

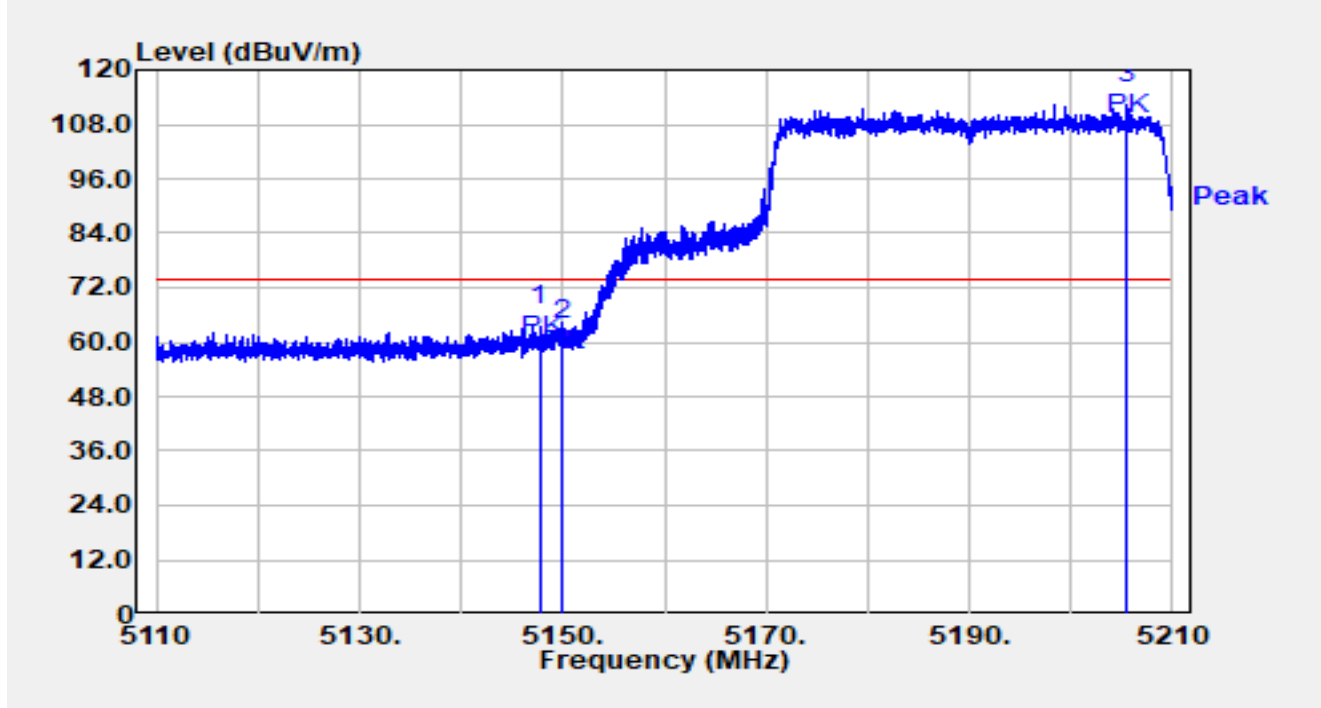


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.740	47.49	15.99	63.48	-10.52	74.00	Peak
2		5150.000	44.36	16.00	60.36	-13.64	74.00	Peak
3		5205.470	96.56	15.93	112.49	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5190MHz		

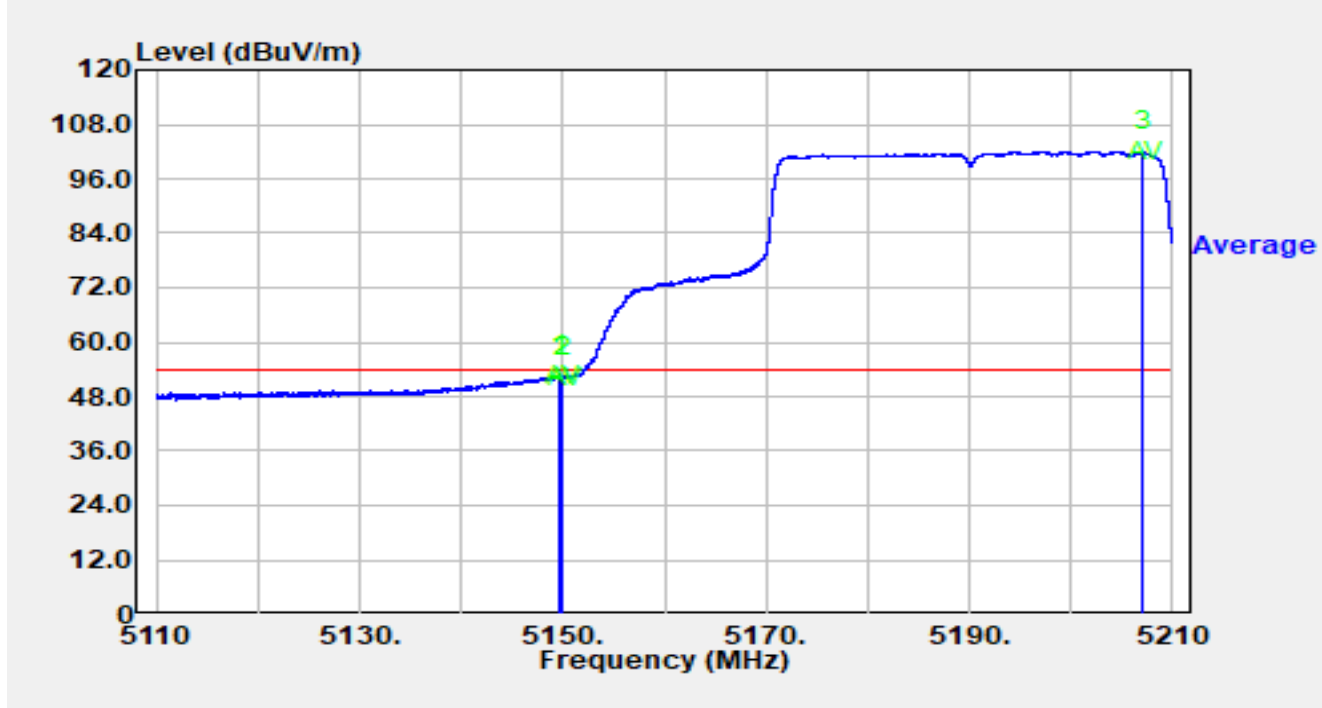


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.720	36.84	16.00	52.84	-1.16	54.00	Average
2		5150.000	36.43	16.00	52.43	-1.57	54.00	Average
3		5207.090	86.15	15.92	102.06	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5190MHz		

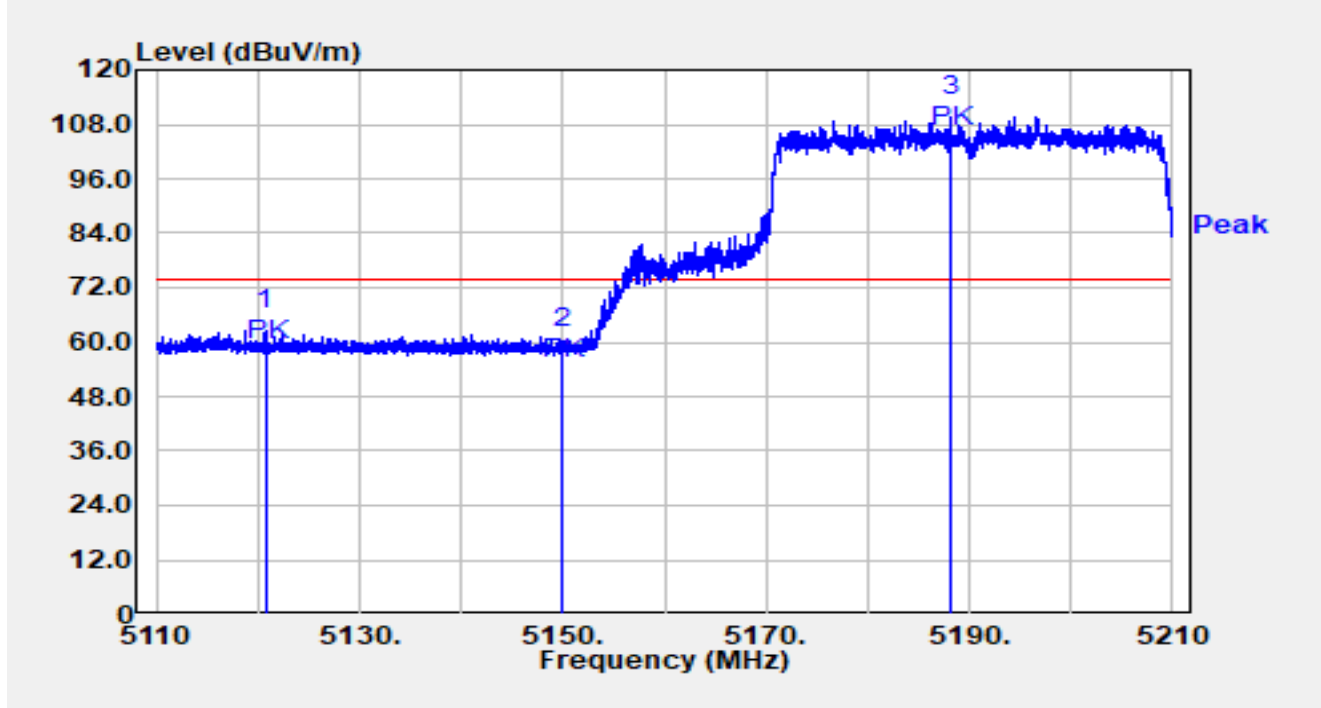


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5120.720	46.45	16.08	62.53	-11.47	74.00	Peak
2		5150.000	42.79	16.00	58.78	-15.22	74.00	Peak
3		5188.200	93.86	15.94	109.80	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5190MHz		

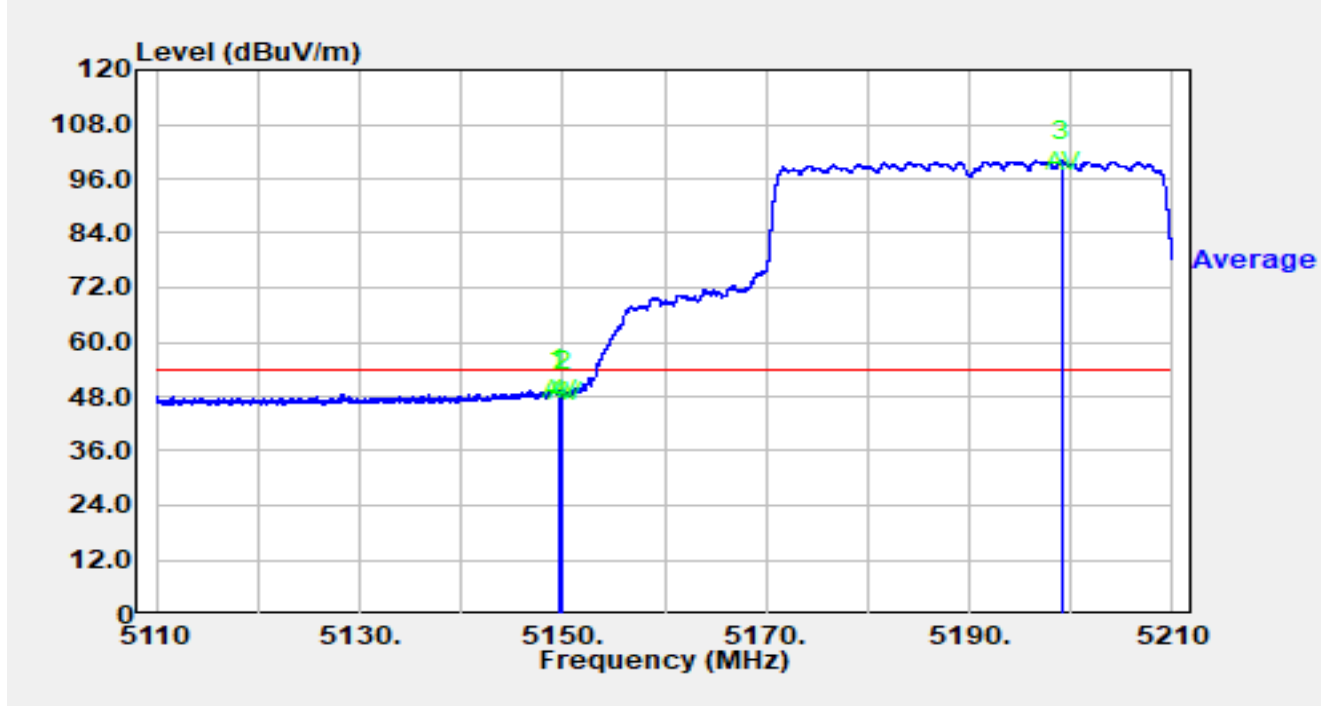


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.650	33.44	16.00	49.44	-4.56	54.00	Average
2		5150.000	32.94	16.00	48.94	-5.06	54.00	Average
3		5199.100	84.02	15.97	100.00	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5310MHz		

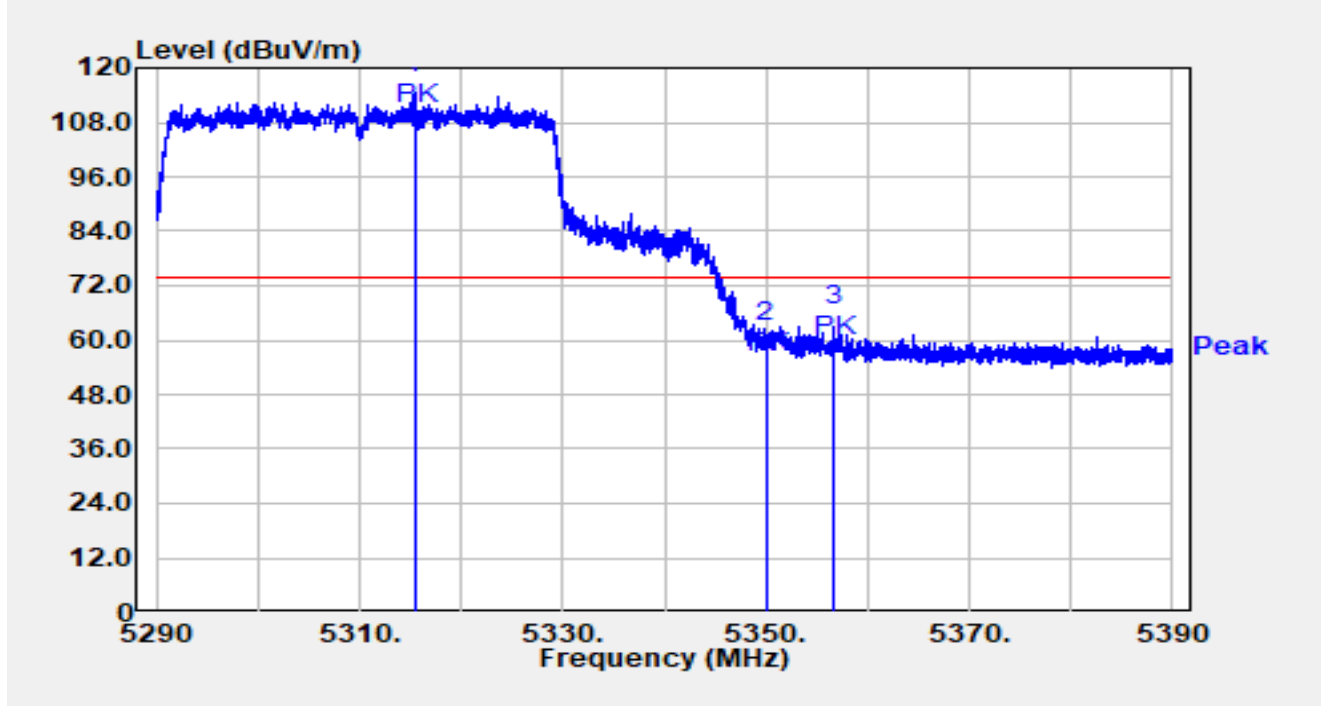


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5315.390	98.73	15.78	114.51	N/A	N/A	Peak
2		5350.000	43.77	15.68	59.45	-14.55	74.00	Peak
3	*	5356.690	47.48	15.66	63.14	-10.86	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5310MHz		

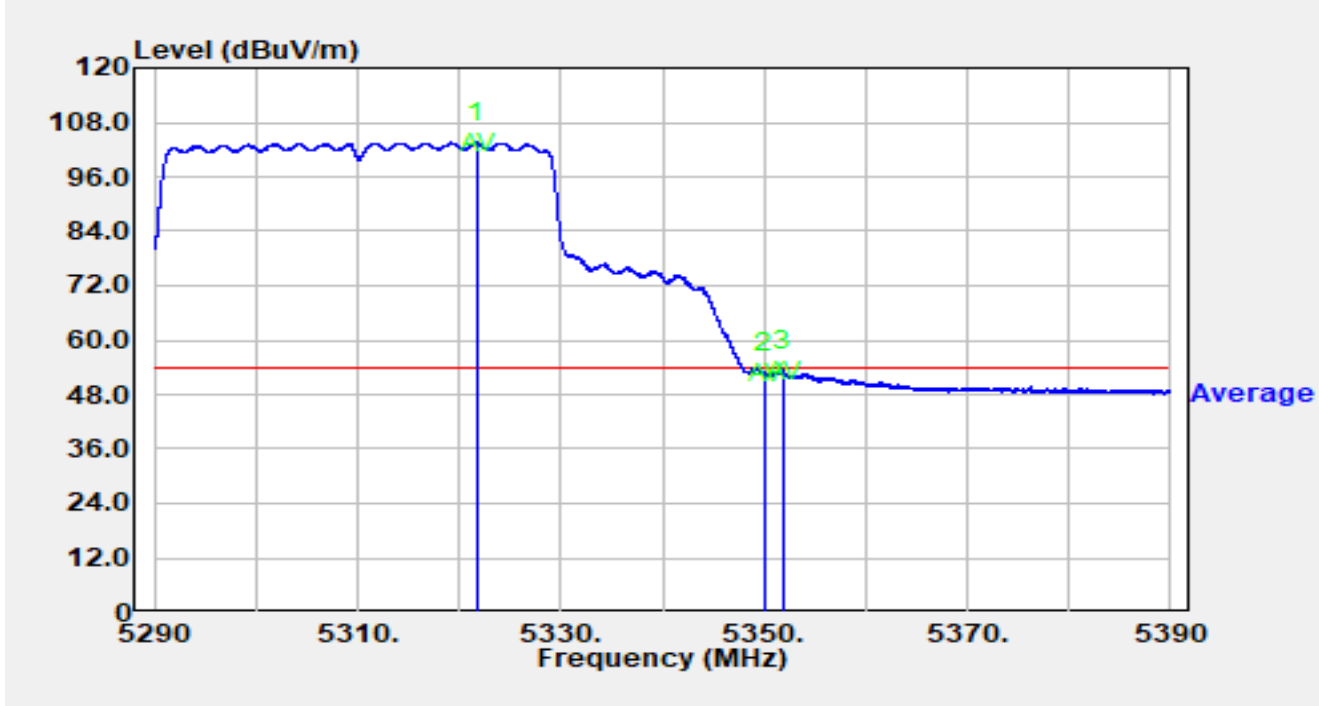


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.670	87.73	15.80	103.53	N/A	N/A	Average
2		5350.000	37.01	15.68	52.69	-1.31	54.00	Average
3	*	5351.830	37.58	15.68	53.26	-0.74	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5310MHz		

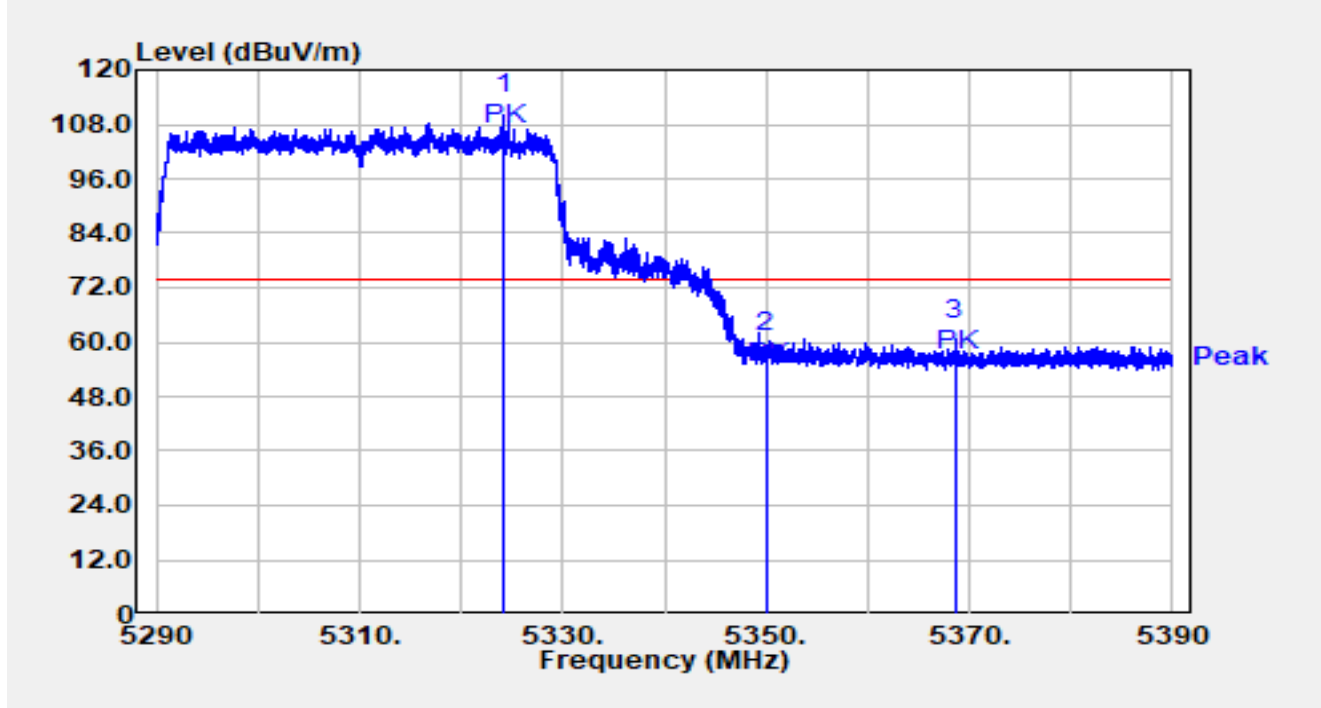


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5324.180	94.35	15.80	110.14	N/A	N/A	Peak
2		5350.000	41.86	15.68	57.54	-16.46	74.00	Peak
3	*	5368.670	44.92	15.61	60.53	-13.47	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5310MHz		

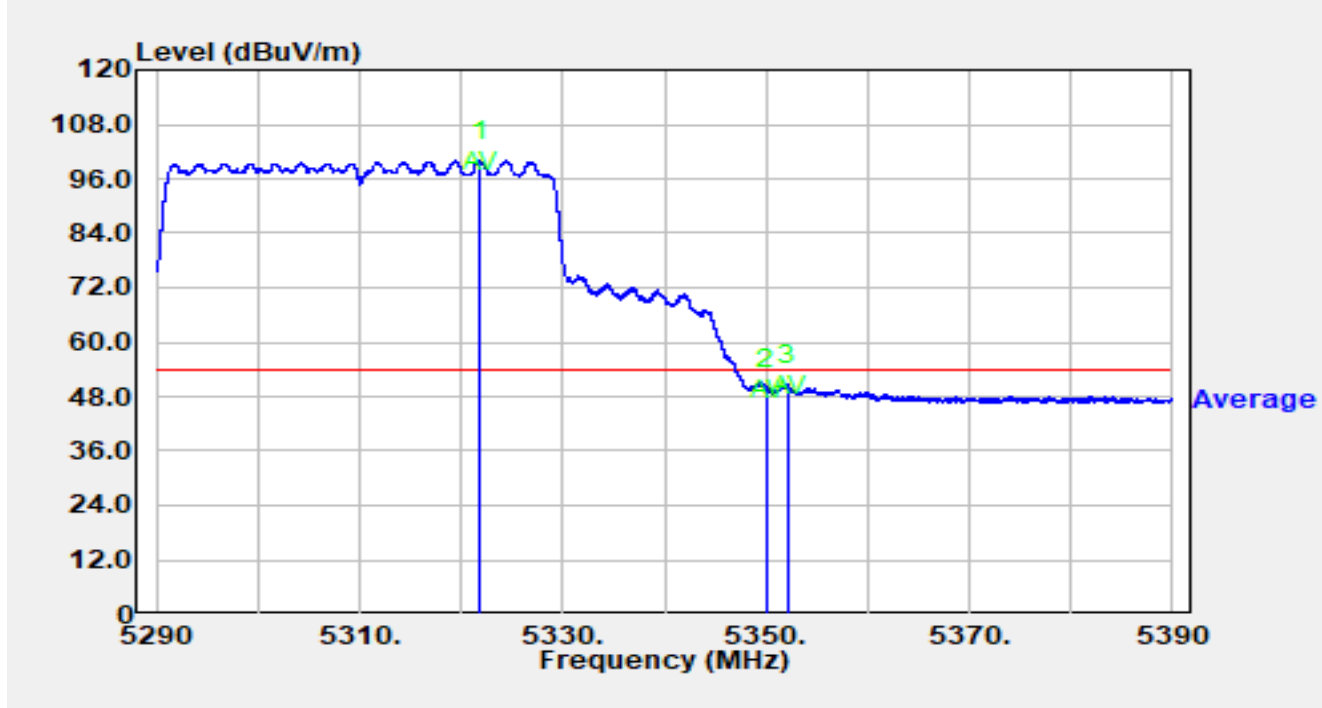


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.820	84.14	15.80	99.94	N/A	N/A	Average
2		5350.000	34.08	15.68	49.76	-4.24	54.00	Average
3	*	5352.060	34.95	15.68	50.63	-3.37	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5510MHz		

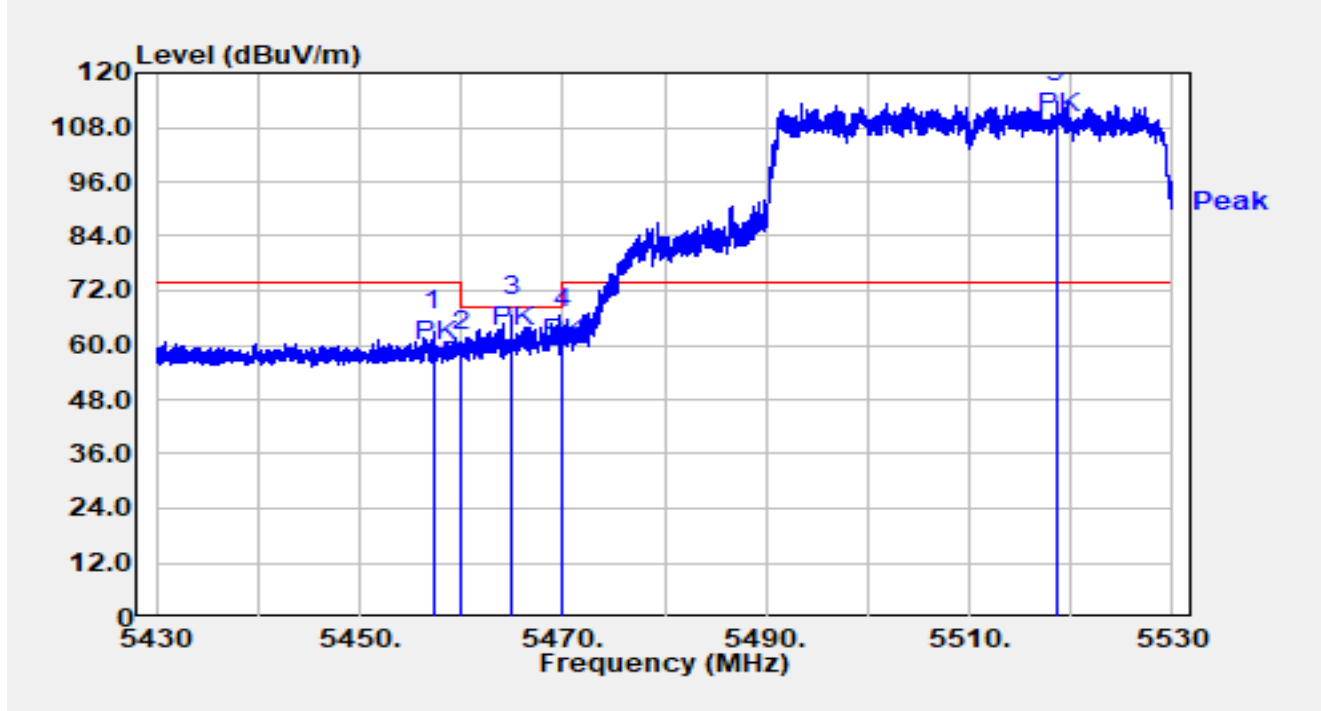


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.320	46.99	16.03	63.03	-10.97	74.00	Peak
2		5460.000	42.57	16.02	58.59	-9.61	68.20	Peak
3	*	5464.960	50.46	16.00	66.47	-1.73	68.20	Peak
4		5470.000	47.76	15.98	63.74	-4.46	68.20	Peak
5		5518.540	97.40	16.18	113.58	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5510MHz		

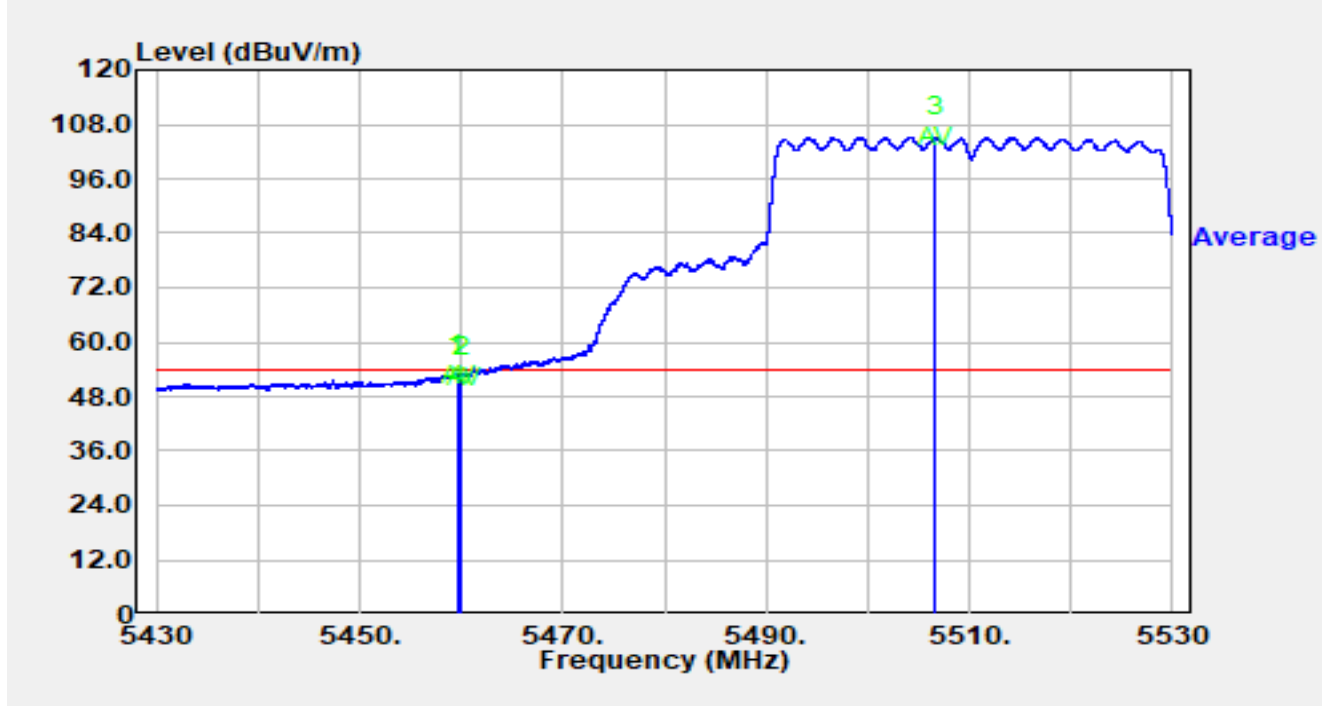


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.620	36.81	16.02	52.83	-1.17	54.00	Average
2		5460.000	36.44	16.02	52.46	-1.54	54.00	Average
3		5506.590	88.92	16.23	105.15	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5510MHz		

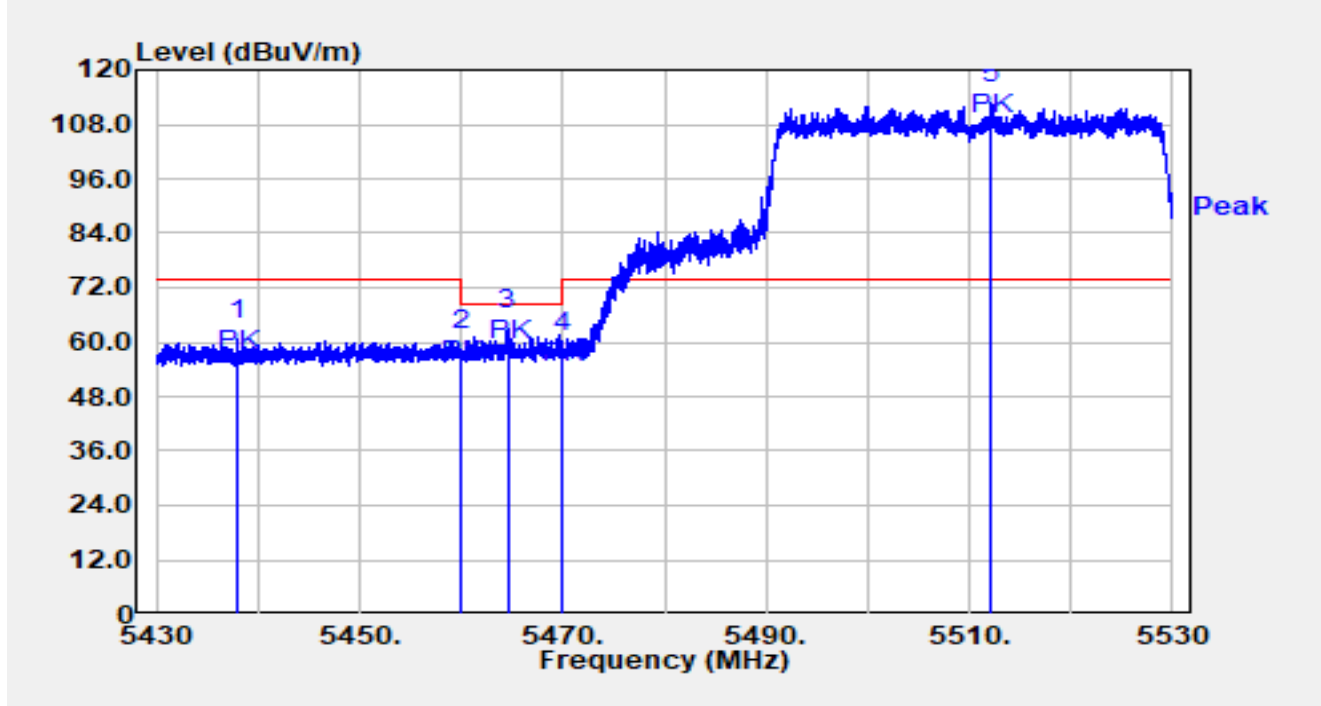


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5437.960	44.70	15.86	60.55	-13.45	74.00	Peak
2		5460.000	42.06	16.02	58.08	-10.12	68.20	Peak
3	*	5464.550	46.80	16.00	62.81	-5.39	68.20	Peak
4		5470.000	41.55	15.98	57.53	-10.67	68.20	Peak
5		5512.190	96.47	16.21	112.68	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5510MHz		

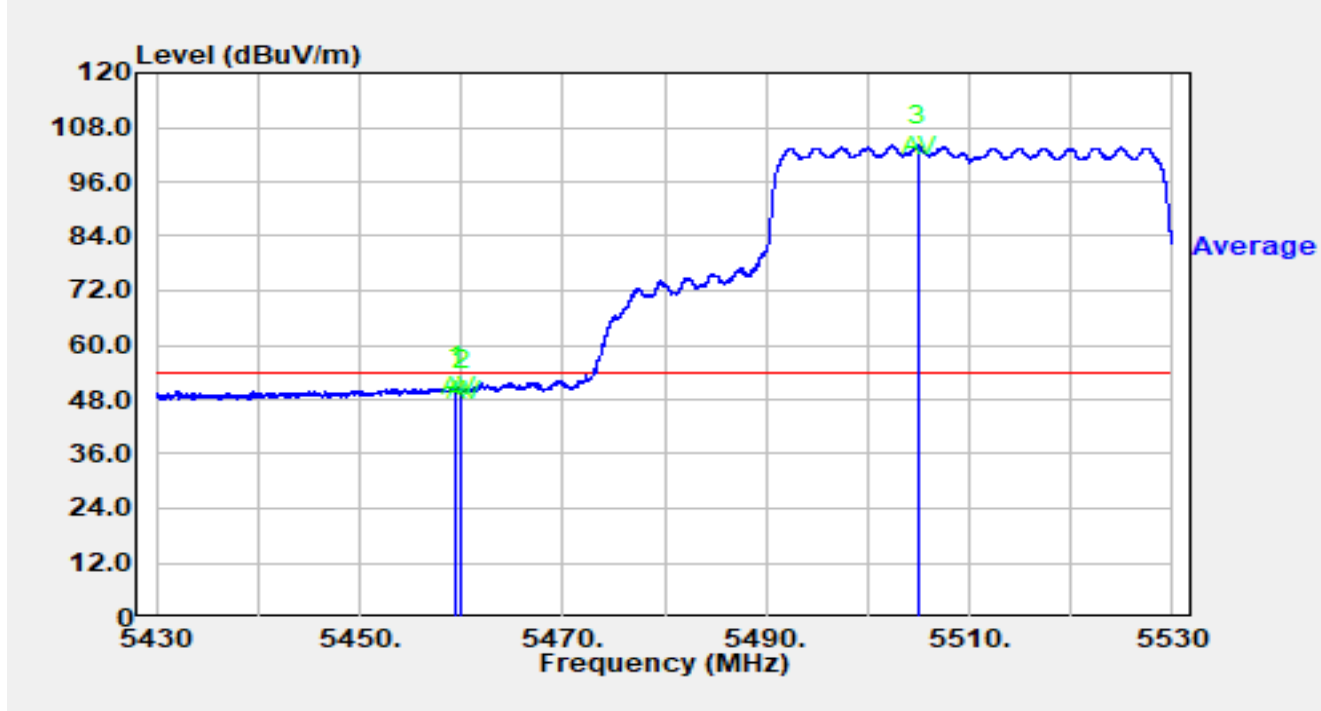


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.530	34.81	16.02	50.84	-3.16	54.00	Average
2		5460.000	34.01	16.02	50.03	-3.97	54.00	Average
3		5504.970	87.84	16.23	104.07	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5670MHz		

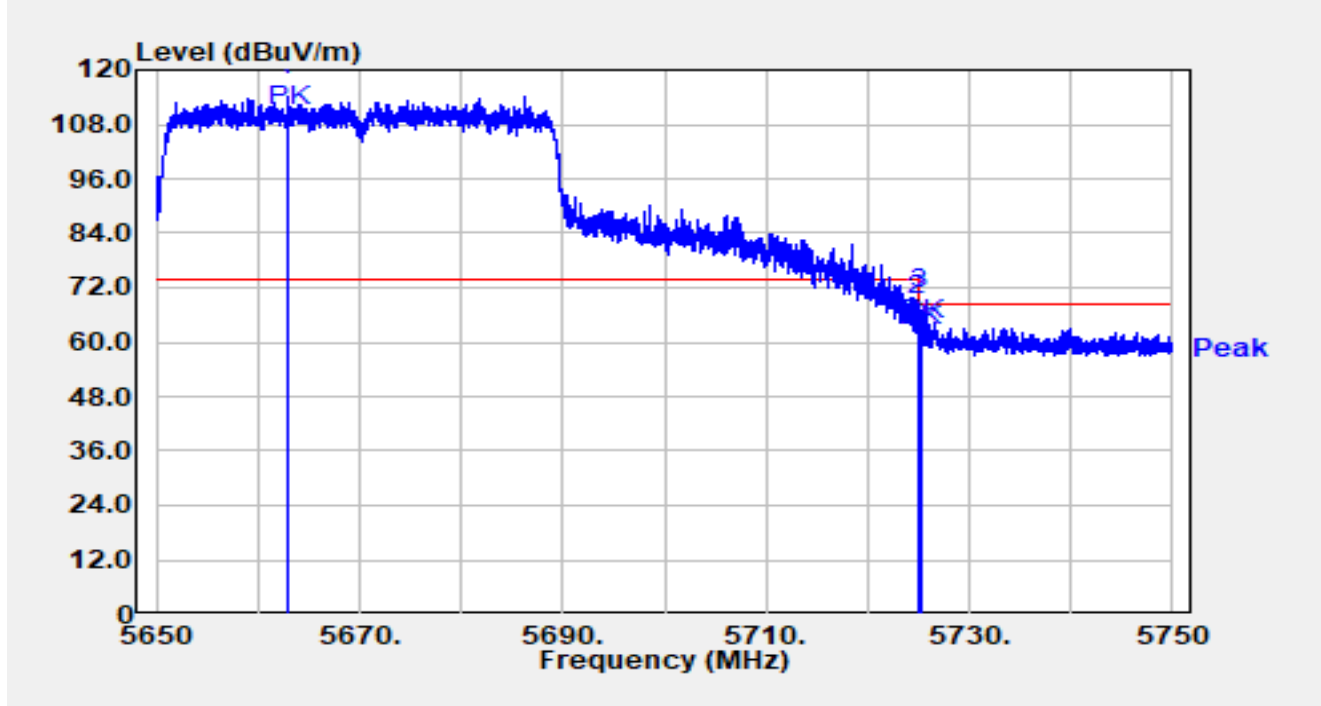


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5662.890	97.61	16.68	114.29	N/A	N/A	Peak
2		5725.000	49.06	16.92	65.98	-2.22	68.20	Peak
3	*	5725.200	50.29	16.93	67.22	-0.98	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5670MHz		

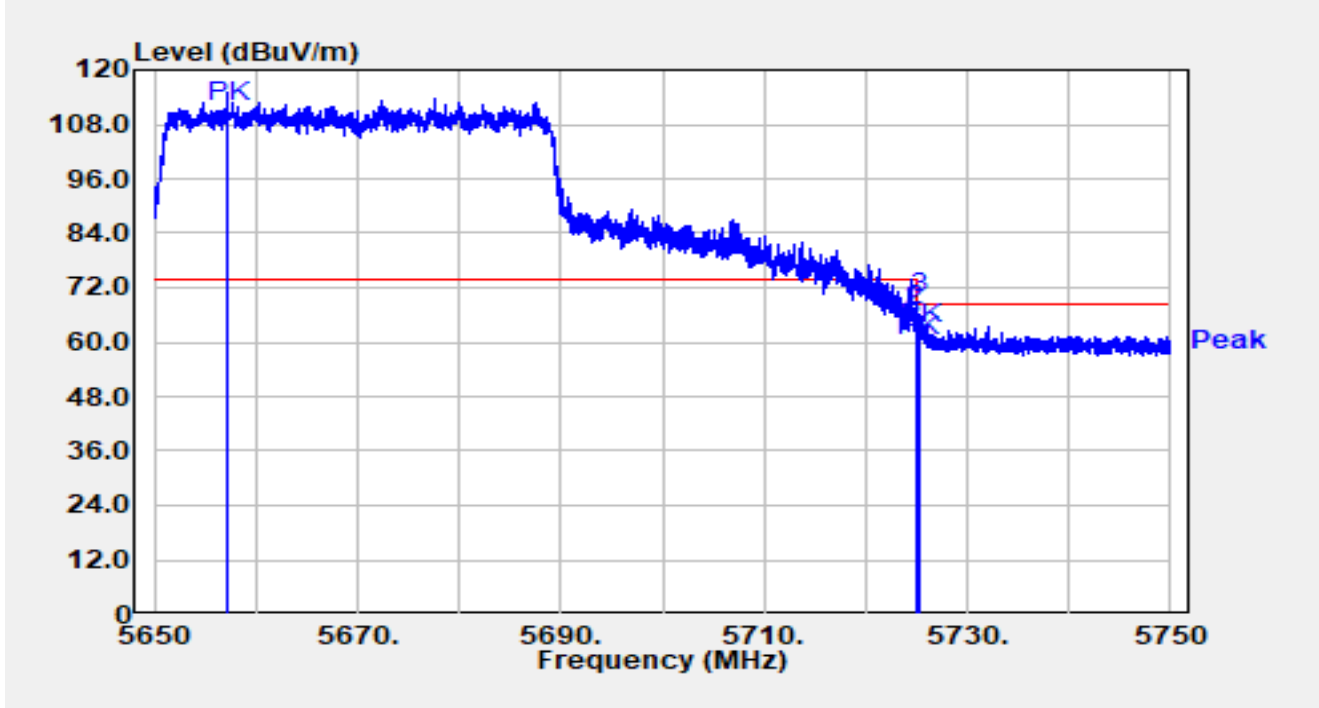


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5657.230	98.52	16.69	115.22	N/A	N/A	Peak
2		5725.000	46.82	16.92	63.75	-4.45	68.20	Peak
3	*	5725.330	49.28	16.93	66.20	-2.00	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5755MHz		

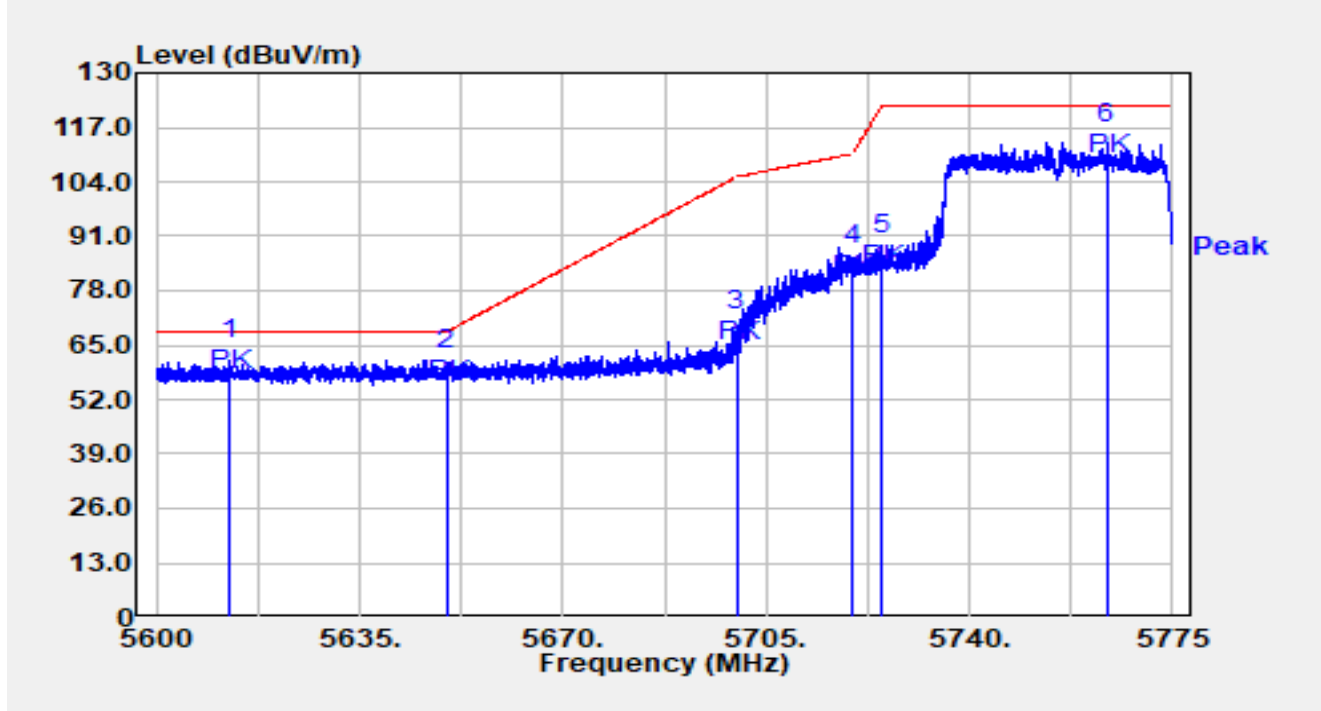


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5612.723	45.04	16.46	61.50	-6.70	68.20	Peak
2		5650.000	42.50	16.65	59.16	-9.04	68.20	Peak
3		5700.000	51.65	16.81	68.46	-36.74	105.20	Peak
4		5720.000	67.20	16.90	84.10	-26.70	110.80	Peak
5		5725.000	69.90	16.92	86.82	-35.38	122.20	Peak
6		5763.783	96.23	17.07	113.31	N/A	N/A	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5755MHz		

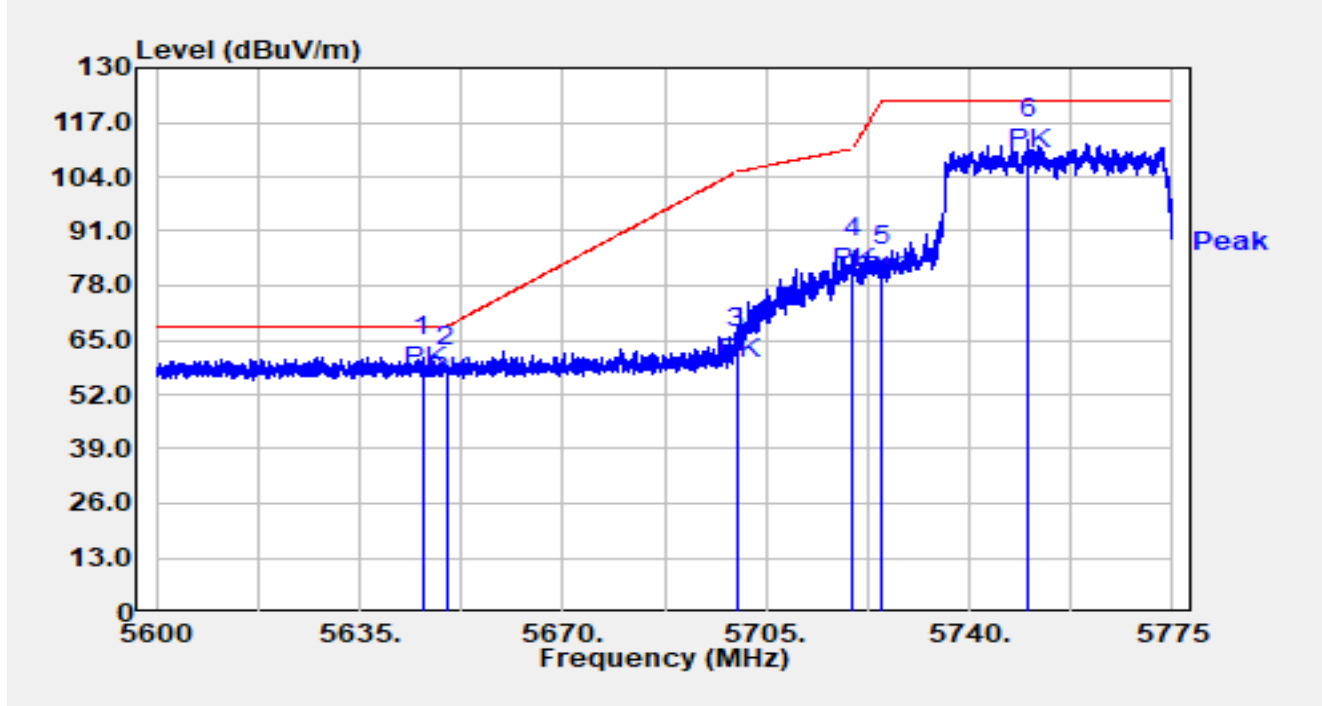


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5645.955	44.39	16.64	61.02	-7.18	68.20	Peak
2		5650.000	41.93	16.65	58.59	-9.61	68.20	Peak
3		5700.000	46.32	16.81	63.13	-42.07	105.20	Peak
4		5720.000	67.95	16.90	84.85	-25.95	110.80	Peak
5		5725.000	65.96	16.92	82.88	-39.32	122.20	Peak
6		5750.185	95.96	16.99	112.96	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5795MHz		

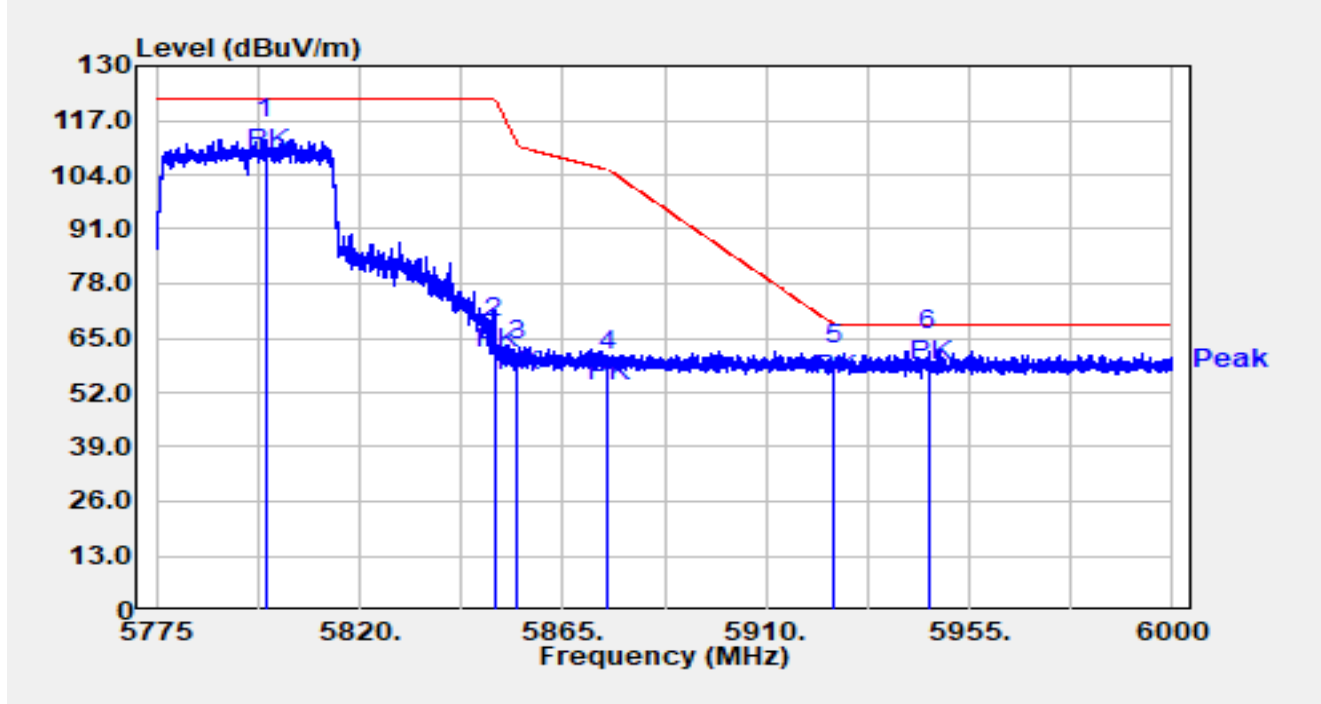


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5799.120	95.26	17.31	112.57	N/A	N/A	Peak
2		5850.000	47.50	17.31	64.81	-57.39	122.20	Peak
3		5855.000	42.29	17.32	59.61	-51.19	110.80	Peak
4		5875.000	39.95	17.38	57.32	-47.88	105.20	Peak
5		5925.000	41.08	17.36	58.45	-9.75	68.20	Peak
6	*	5946.067	44.43	17.44	61.88	-6.32	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5795MHz		

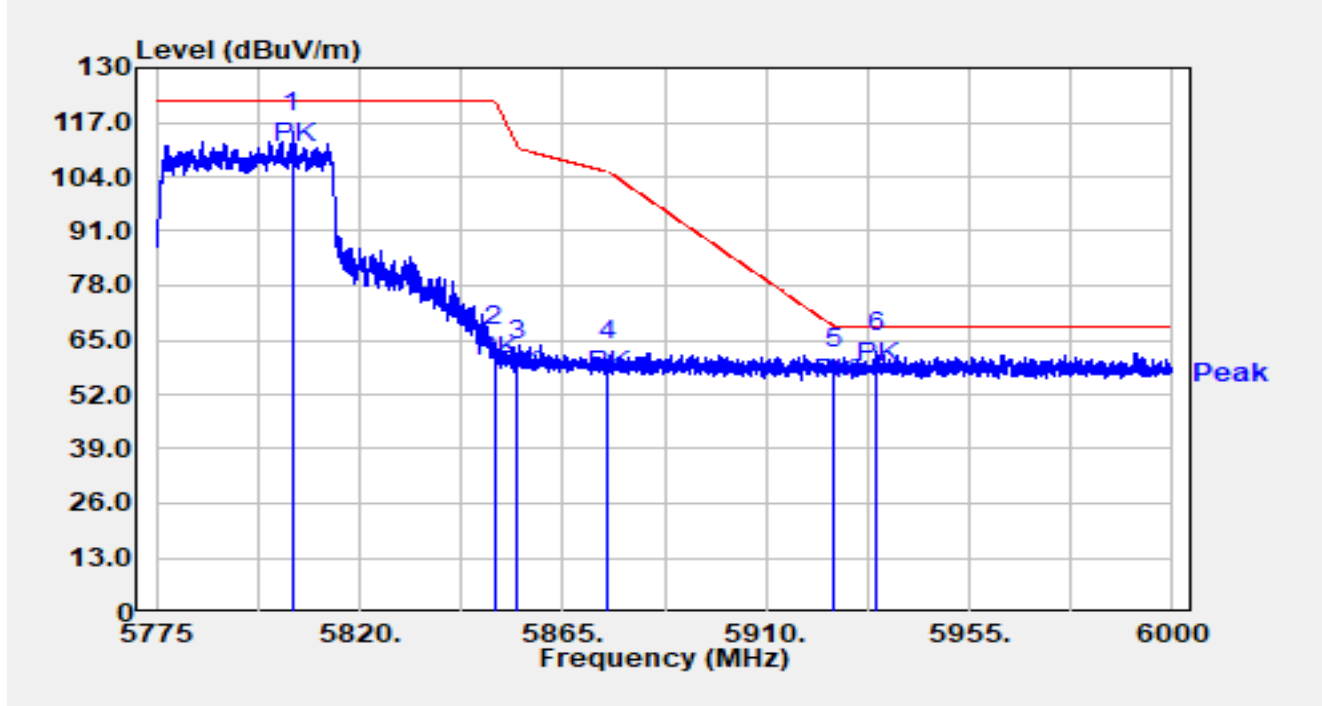


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5805.217	97.29	17.34	114.63	N/A	N/A	Peak
2		5850.000	46.21	17.31	63.52	-58.68	122.20	Peak
3		5855.000	42.84	17.32	60.16	-50.64	110.80	Peak
4		5875.000	42.63	17.38	60.00	-45.20	105.20	Peak
5		5925.000	40.94	17.36	58.30	-9.90	68.20	Peak
6	*	5934.615	44.67	17.40	62.07	-6.13	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5210MHz		

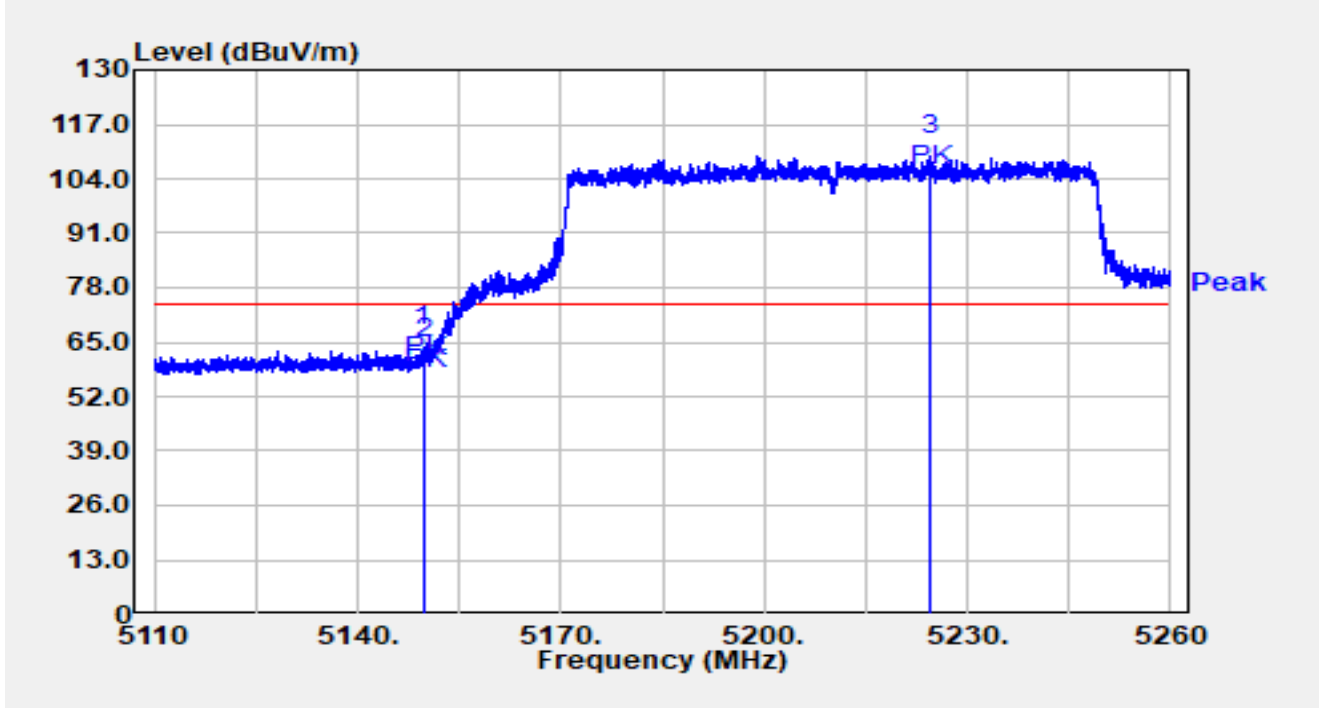


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.675	47.82	16.00	63.82	-10.18	74.00	Peak
2		5150.000	45.29	16.00	61.29	-12.71	74.00	Peak
3		5224.645	93.55	15.89	109.44	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5210MHz		

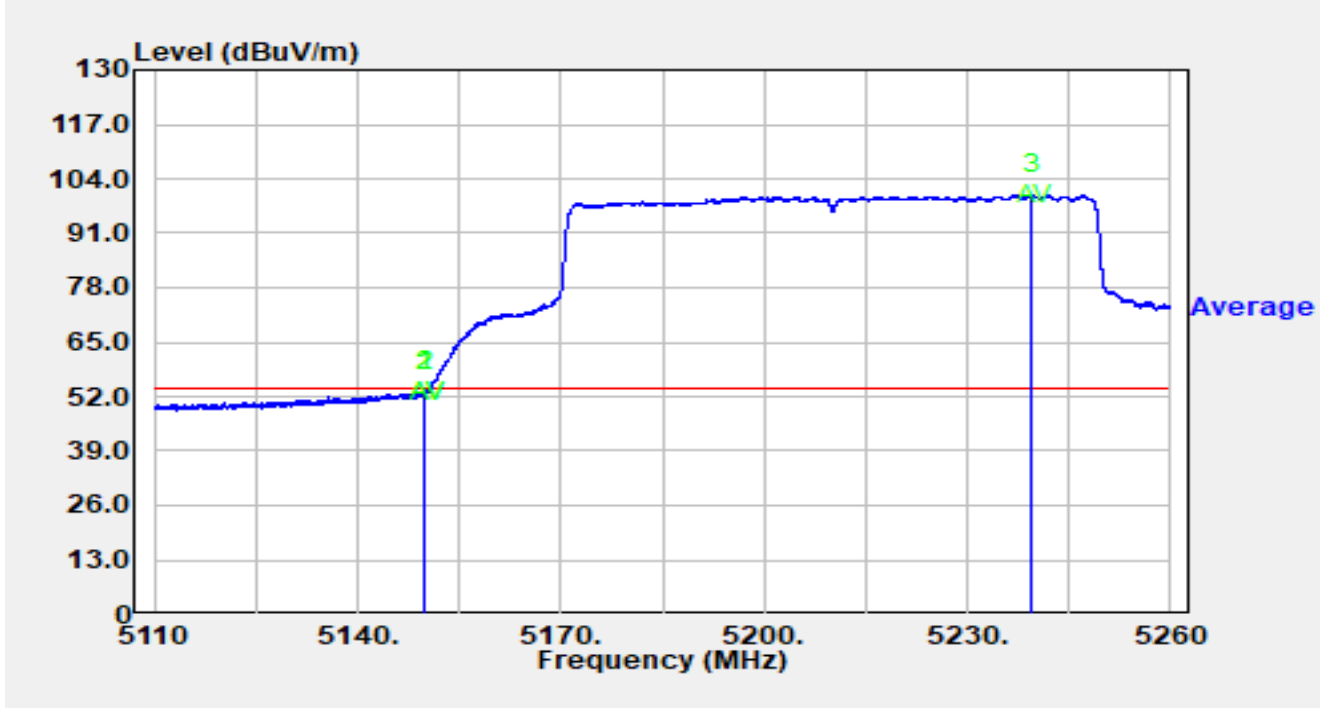


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.930	37.29	16.00	53.29	-0.71	54.00	Average
2		5150.000	37.05	16.00	53.04	-0.96	54.00	Average
3		5239.615	84.23	15.97	100.20	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5210MHz		

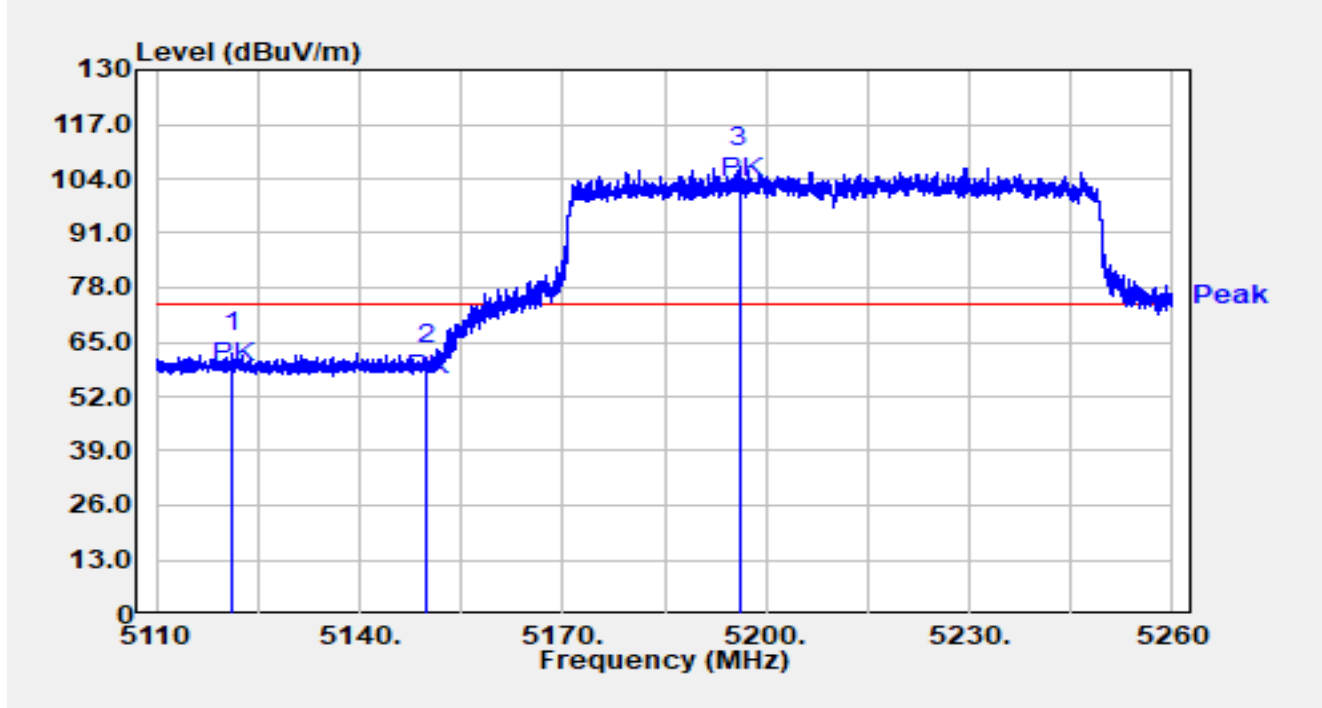


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5121.310	46.32	16.07	62.39	-11.61	74.00	Peak
2		5150.000	43.60	16.00	59.60	-14.40	74.00	Peak
3		5196.040	90.93	15.96	106.90	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5210MHz		

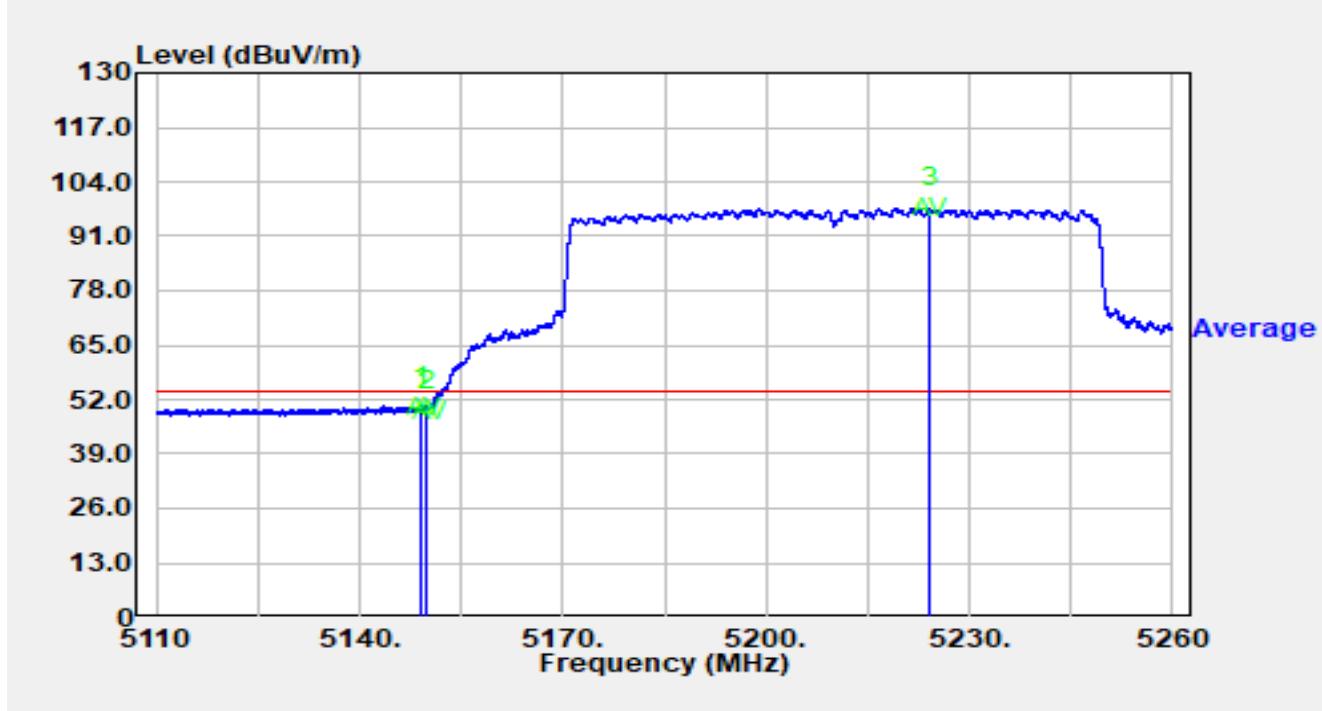


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.195	34.39	16.00	50.39	-3.61	54.00	Average
2		5150.000	33.52	16.00	49.52	-4.48	54.00	Average
3		5224.135	81.81	15.88	97.70	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5290MHz		

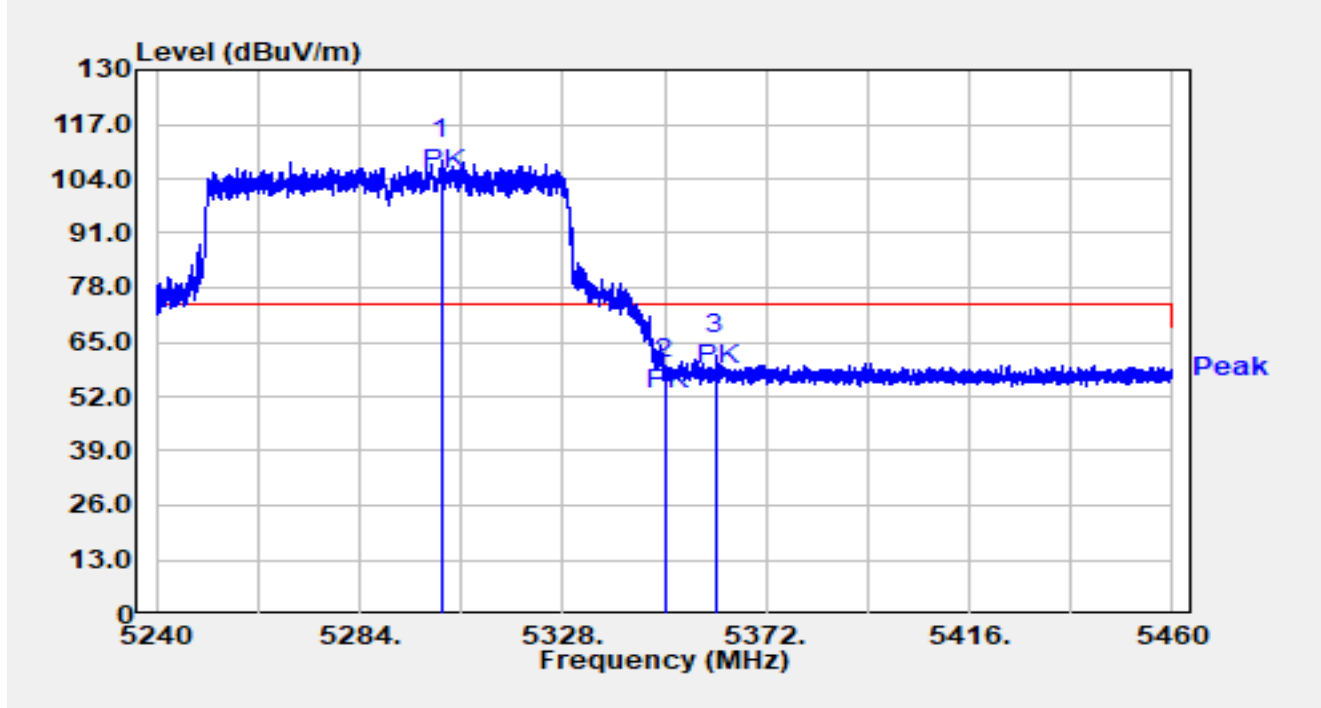


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5301.798	92.89	15.76	108.65	N/A	N/A	Peak
2		5350.000	40.53	15.68	56.21	-17.79	74.00	Peak
3	*	5361.066	46.39	15.64	62.04	-11.96	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5290MHz		

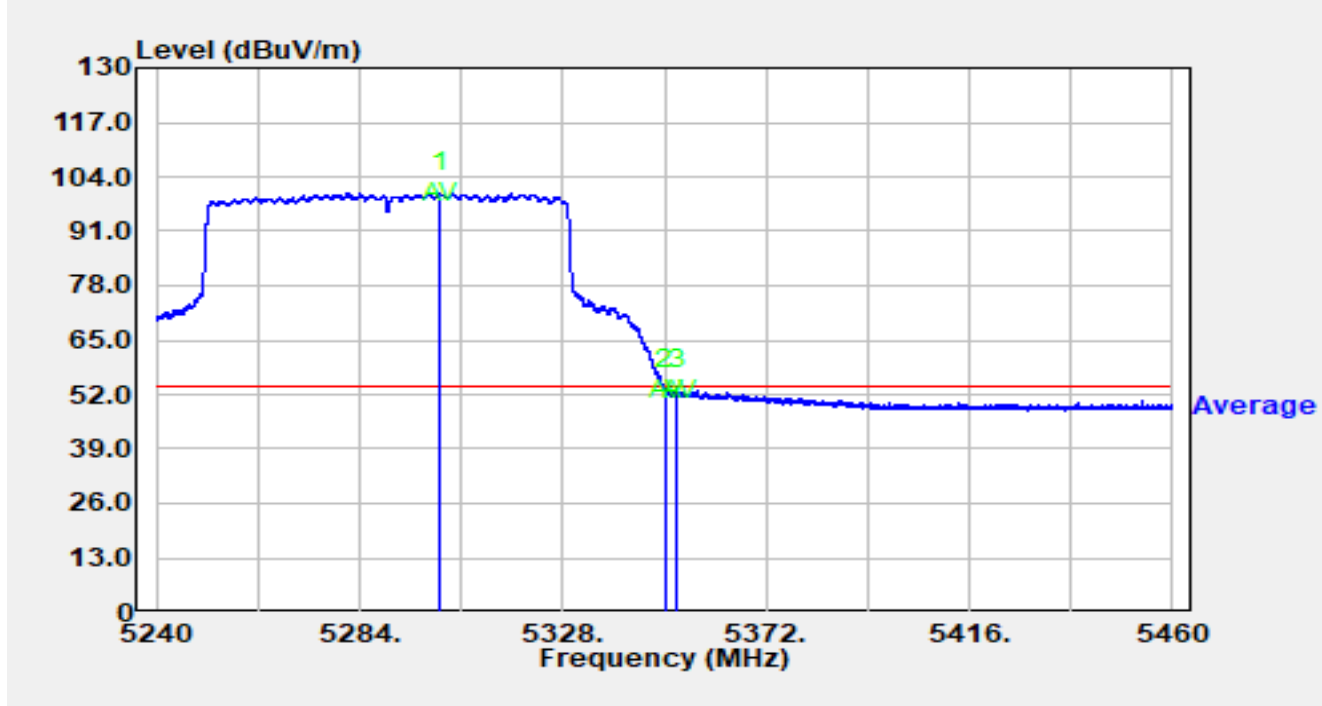


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5301.380	84.35	15.76	100.11	N/A	N/A	Average
2	*	5350.000	37.56	15.68	53.24	-0.76	54.00	Average
3		5352.728	37.41	15.67	53.09	-0.91	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5290MHz		

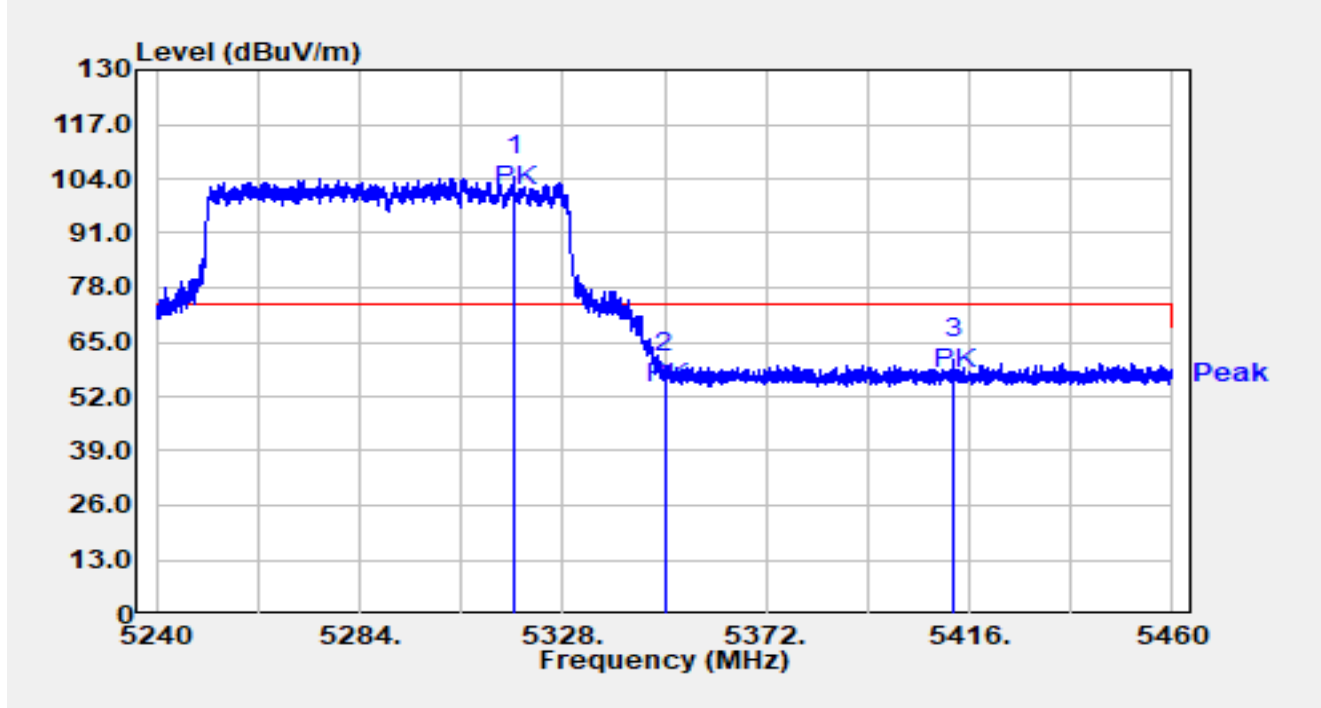


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5317.572	88.91	15.79	104.70	N/A	N/A	Peak
2		5350.000	41.95	15.68	57.63	-16.37	74.00	Peak
3	*	5412.590	45.11	15.80	60.91	-13.09	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5290MHz		

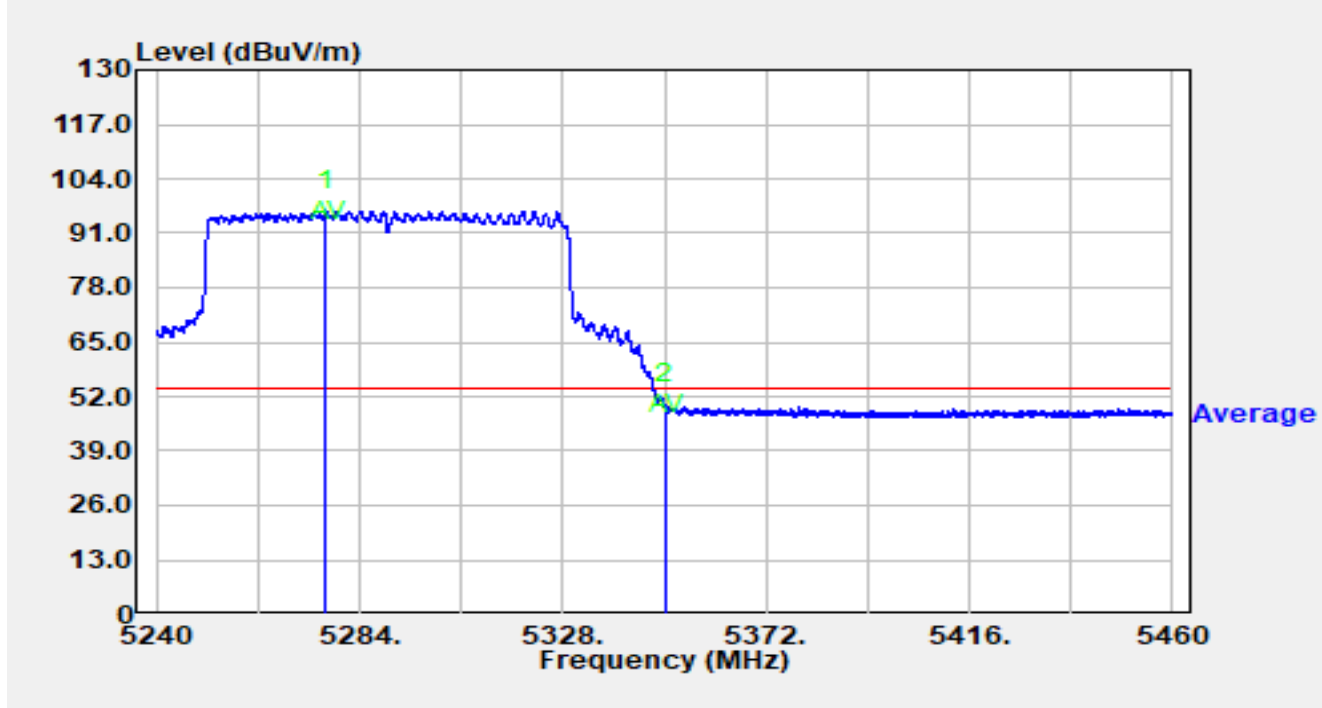


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5276.696	80.65	15.82	96.46	N/A	N/A	Average
2	*	5350.000	34.41	15.68	50.09	-3.91	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5530MHz		

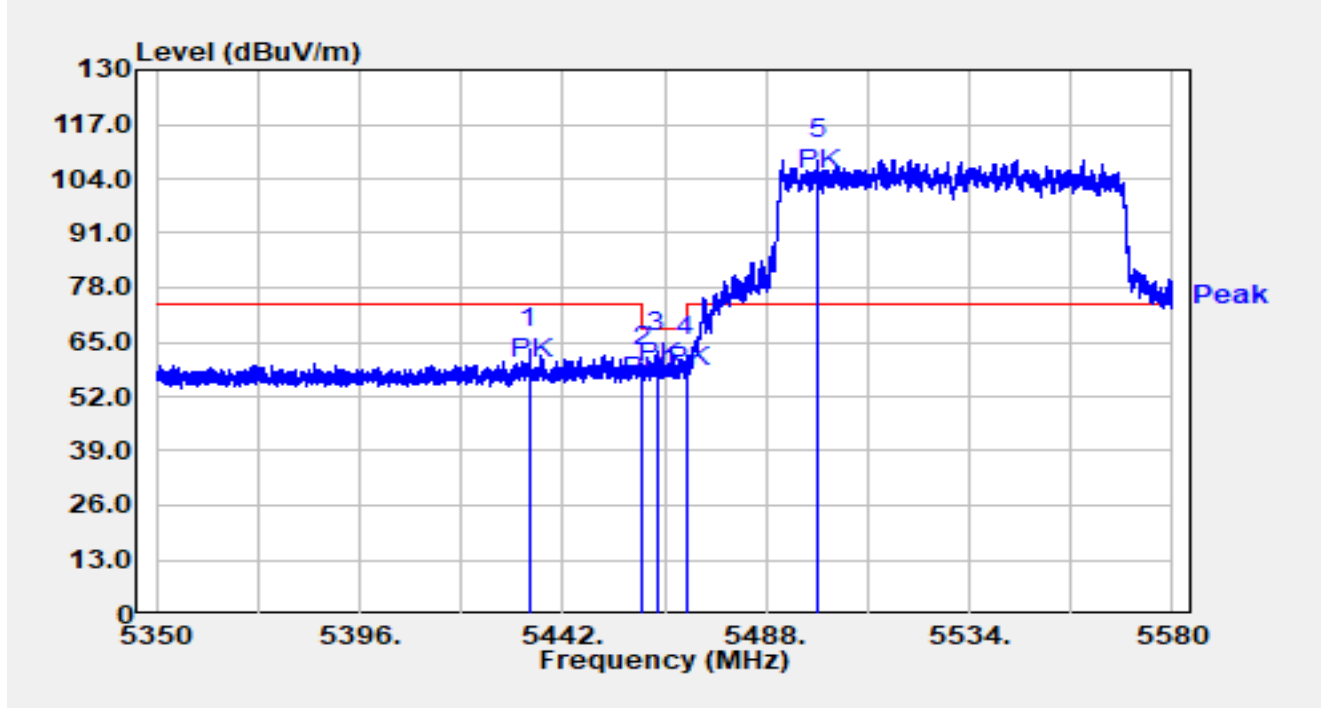


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5434.433	47.48	15.85	63.33	-10.67	74.00	Peak
2		5460.000	42.91	16.02	58.94	-9.26	68.20	Peak
3	*	5463.229	46.63	16.01	62.63	-5.57	68.20	Peak
4		5470.000	45.38	15.98	61.36	-6.84	68.20	Peak
5		5499.753	92.46	16.18	108.64	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5530MHz		

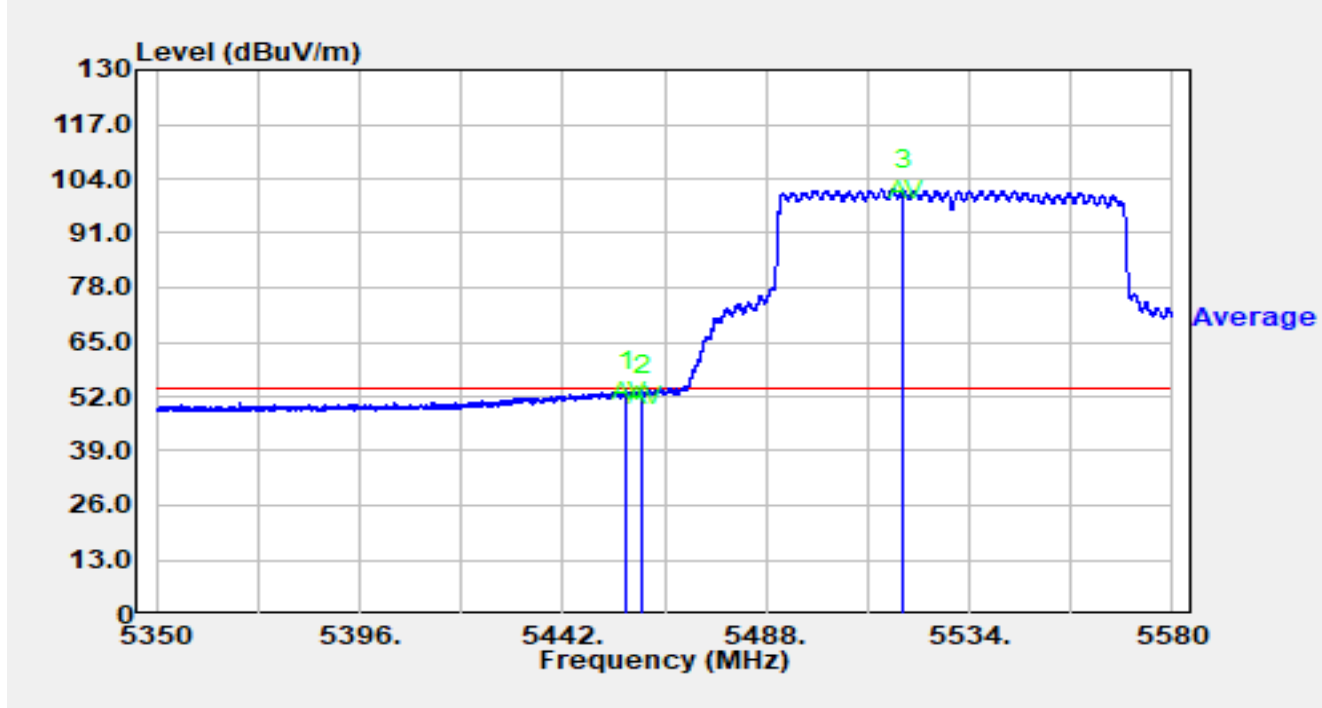


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5456.490	37.43	16.04	53.47	-0.53	54.00	Average
2		5460.000	36.44	16.02	52.46	-1.54	54.00	Average
3		5519.050	85.32	16.17	101.49	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5530MHz		

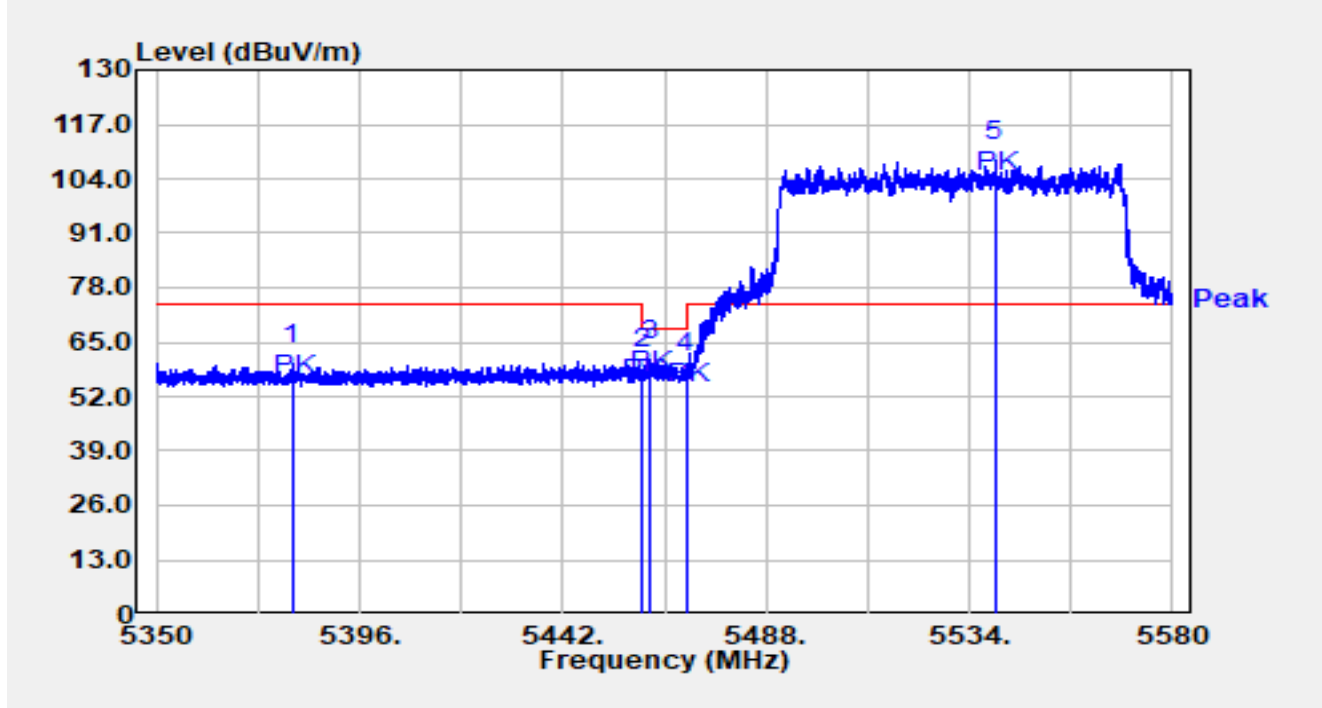


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5380.843	43.97	15.65	59.62	-14.38	74.00	Peak
2		5460.000	42.36	16.02	58.39	-9.81	68.20	Peak
3	*	5461.918	44.63	16.01	60.64	-7.56	68.20	Peak
4		5470.000	41.76	15.98	57.74	-10.46	68.20	Peak
5		5539.911	92.02	16.17	108.19	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5530MHz		

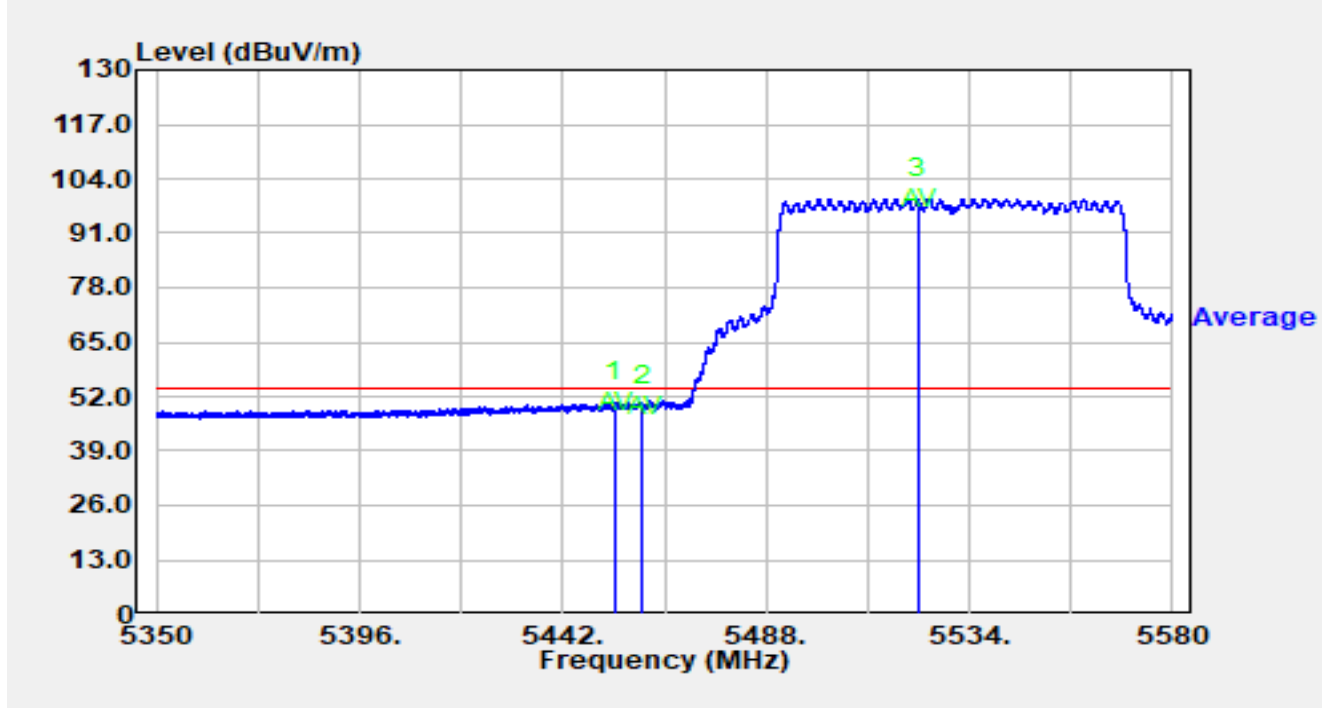


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5453.661	34.56	16.03	50.59	-3.41	54.00	Average
2		5460.000	33.83	16.02	49.85	-4.15	54.00	Average
3		5522.247	83.14	16.16	99.30	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5610MHz		

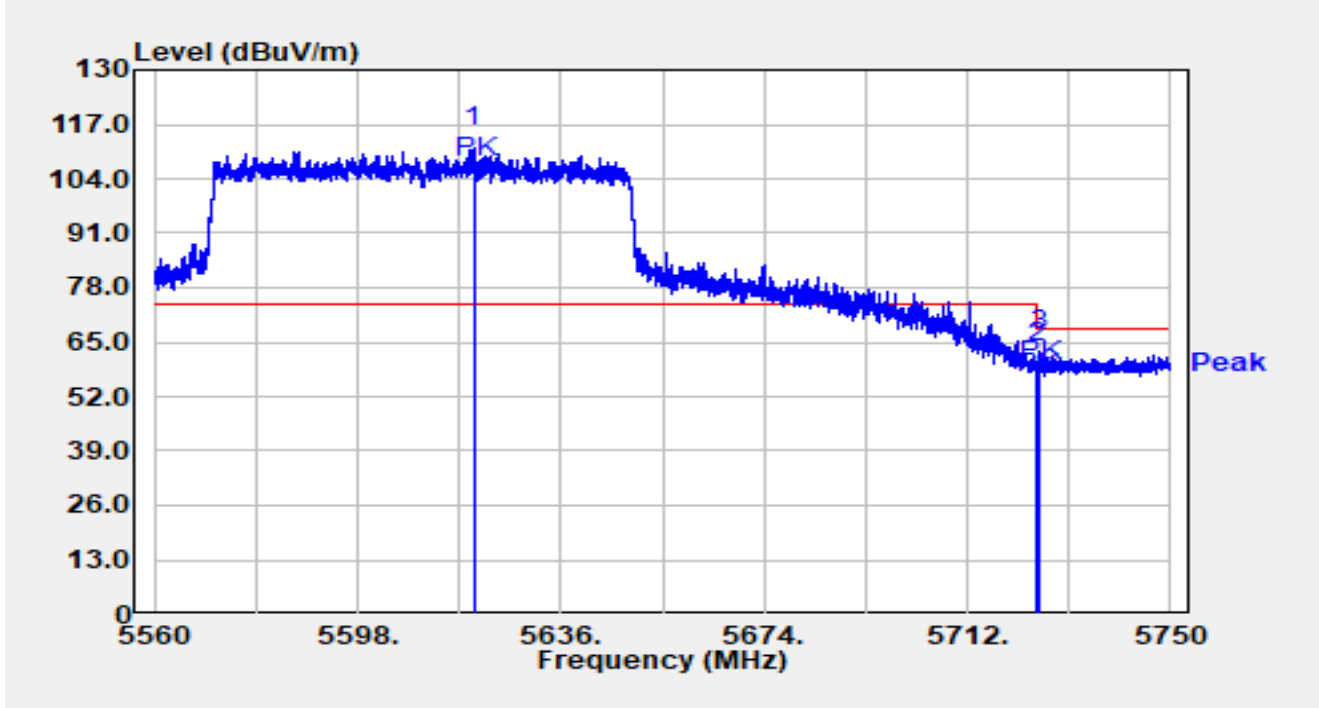


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5619.907	94.97	16.49	111.45	N/A	N/A	Peak
2		5725.000	42.98	16.92	59.91	-8.29	68.20	Peak
3	*	5725.566	45.98	16.93	62.90	-5.30	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5610MHz		

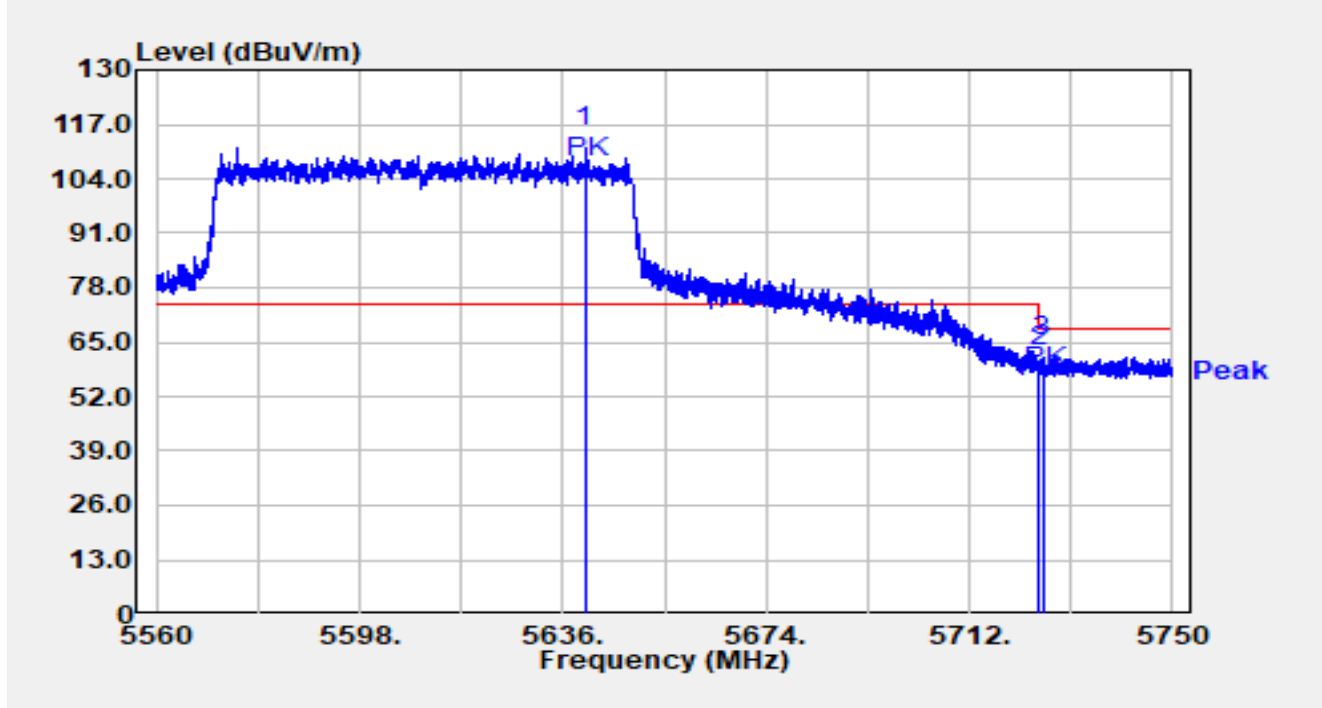


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5640.237	94.96	16.61	111.57	N/A	N/A	Peak
2		5725.000	41.96	16.92	58.88	-9.32	68.20	Peak
3	*	5725.756	44.49	16.93	61.41	-6.79	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5775MHz		

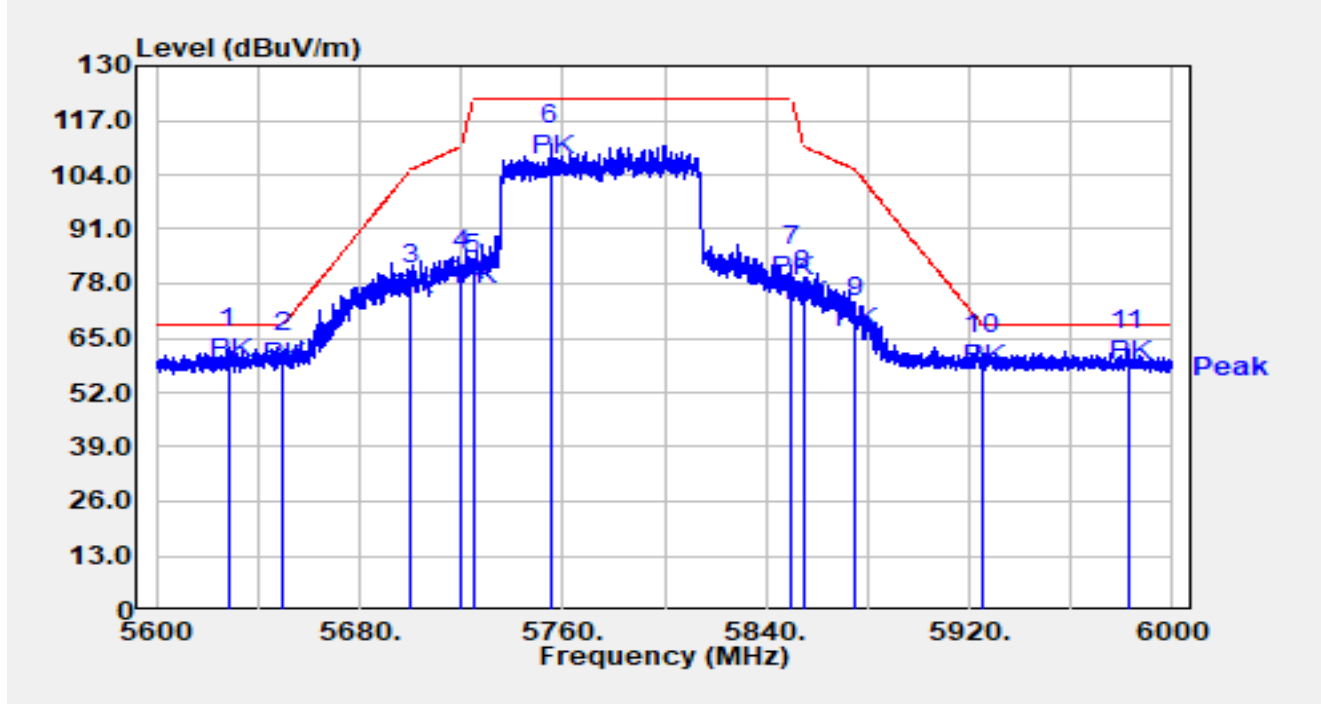

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5628.160	46.13	16.54	62.66	-5.54	68.20	Peak
2		5650.000	44.70	16.65	61.36	-6.84	68.20	Peak
3		5700.000	61.06	16.81	77.87	-27.33	105.20	Peak
4		5720.000	64.28	16.90	81.18	-29.62	110.80	Peak
5		5725.000	63.21	16.92	80.14	-42.06	122.20	Peak
6		5755.280	94.12	17.02	111.14	N/A	N/A	Peak
7		5850.000	64.80	17.31	82.11	-40.09	122.20	Peak
8		5855.000	58.81	17.32	76.14	-34.66	110.80	Peak
9		5875.000	52.70	17.38	70.07	-35.13	105.20	Peak
10		5925.000	43.75	17.36	61.11	-7.09	68.20	Peak
11		5982.800	44.74	17.57	62.30	-5.90	68.20	Peak


Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dB μ V/m) = Reading (dB μ V) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-01-08
Temperature	18.4°C	Humidity	33.4%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5775MHz		

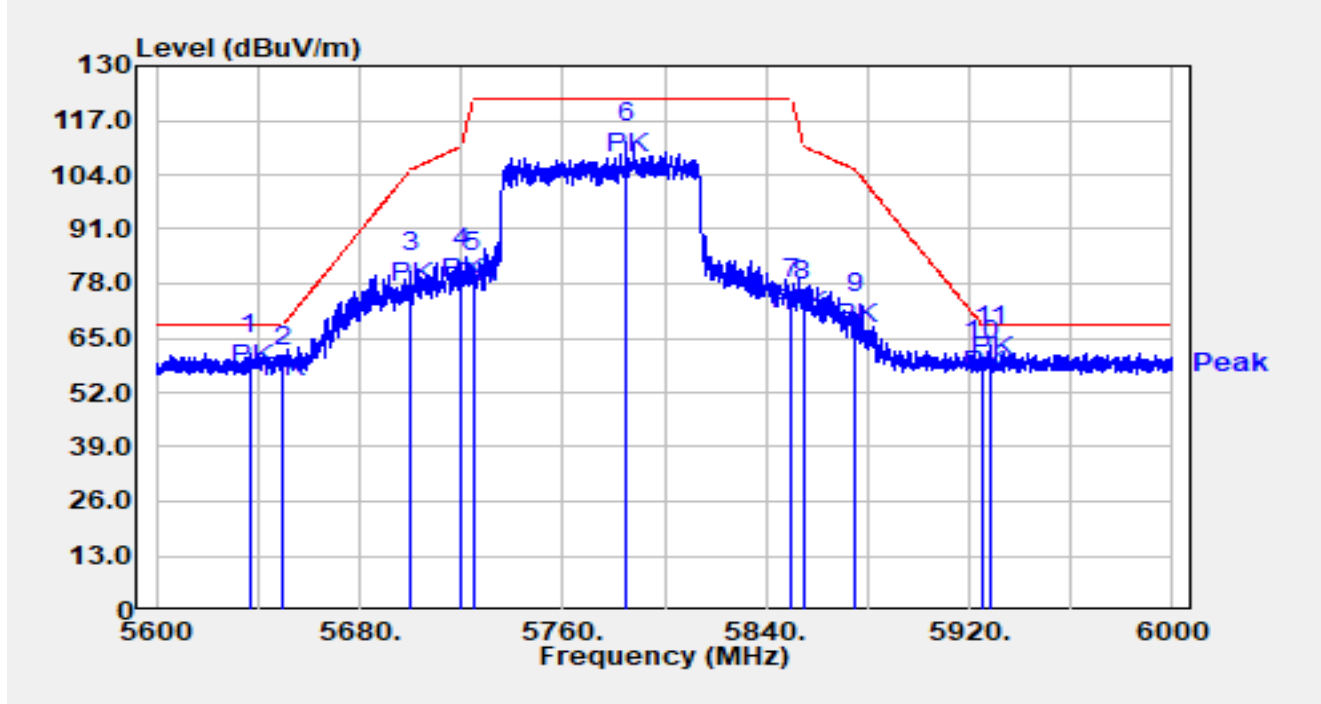

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5636.880	44.66	16.60	61.26	-6.94	68.20	Peak
2		5650.000	41.39	16.65	58.04	-10.16	68.20	Peak
3		5700.000	64.05	16.81	80.86	-24.34	105.20	Peak
4		5720.000	64.73	16.90	81.63	-29.17	110.80	Peak
5		5725.000	63.79	16.92	80.71	-41.49	122.20	Peak
6		5784.960	94.43	17.22	111.64	N/A	N/A	Peak
7		5850.000	56.88	17.31	74.20	-48.00	122.20	Peak
8		5855.000	56.66	17.32	73.98	-36.82	110.80	Peak
9		5875.000	53.61	17.38	70.99	-34.21	105.20	Peak
10		5925.000	42.28	17.36	59.64	-8.56	68.20	Peak
11	*	5928.400	45.74	17.38	63.12	-5.08	68.20	Peak

Notes:


1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dB μ V/m) = Reading (dB μ V) + C.F (dB/m).

A.9 AC Conducted Emissions Test Result

Site	WJ-SR5	Test Date	2025-02-18
Temperature	15.3 °C	Humidity	40.4 %
Limit	FCC Part 15.207_CE_QP	Test Engineer	Carl Jiang
Factor	ENV216-07202_L1_Filter Off	Polarity	Line1
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5180MHz		

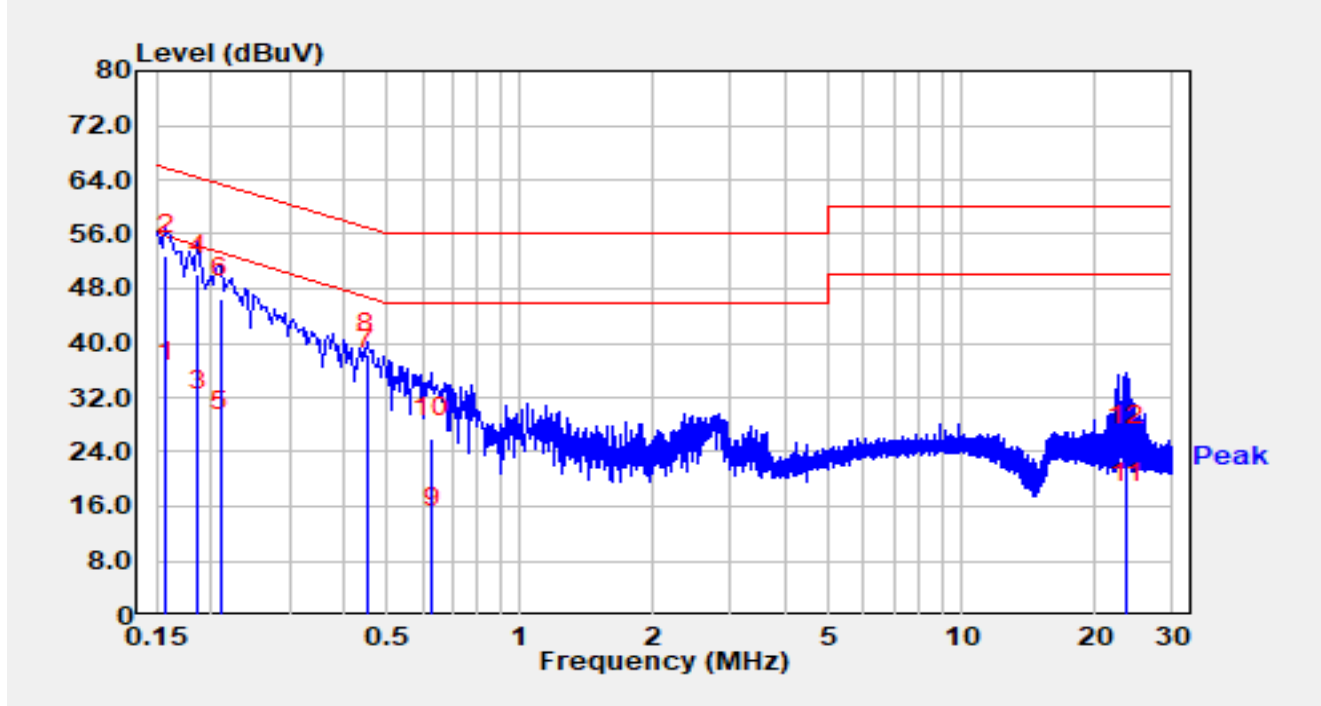


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.158	24.70	9.67	34.37	-21.20	55.57	Average
2		0.158	43.20	9.67	52.87	-12.70	65.57	QP
3		0.186	20.50	9.68	30.18	-24.03	54.21	Average
4		0.186	40.40	9.68	50.08	-14.13	64.21	QP
5		0.210	17.40	9.69	27.09	-26.12	53.21	Average
6		0.210	36.90	9.69	46.59	-16.62	63.21	QP
7	*	0.450	26.40	9.79	36.19	-10.69	46.88	Average
8		0.450	28.70	9.79	38.49	-18.39	56.88	QP
9		0.630	3.00	9.87	12.87	-33.13	46.00	Average
10		0.630	16.20	9.87	26.07	-29.93	56.00	QP
11		23.704	6.40	10.18	16.58	-33.42	50.00	Average
12		23.704	14.70	10.18	24.88	-35.12	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	WJ-SR5	Test Date	2025-02-18
Temperature	15.3 °C	Humidity	40.4 %
Limit	FCC Part 15.207_CE_QP	Test Engineer	Carl Jiang
Factor	ENV216-07202_N_Filter Off	Polarity	Neutral
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5180MHz		

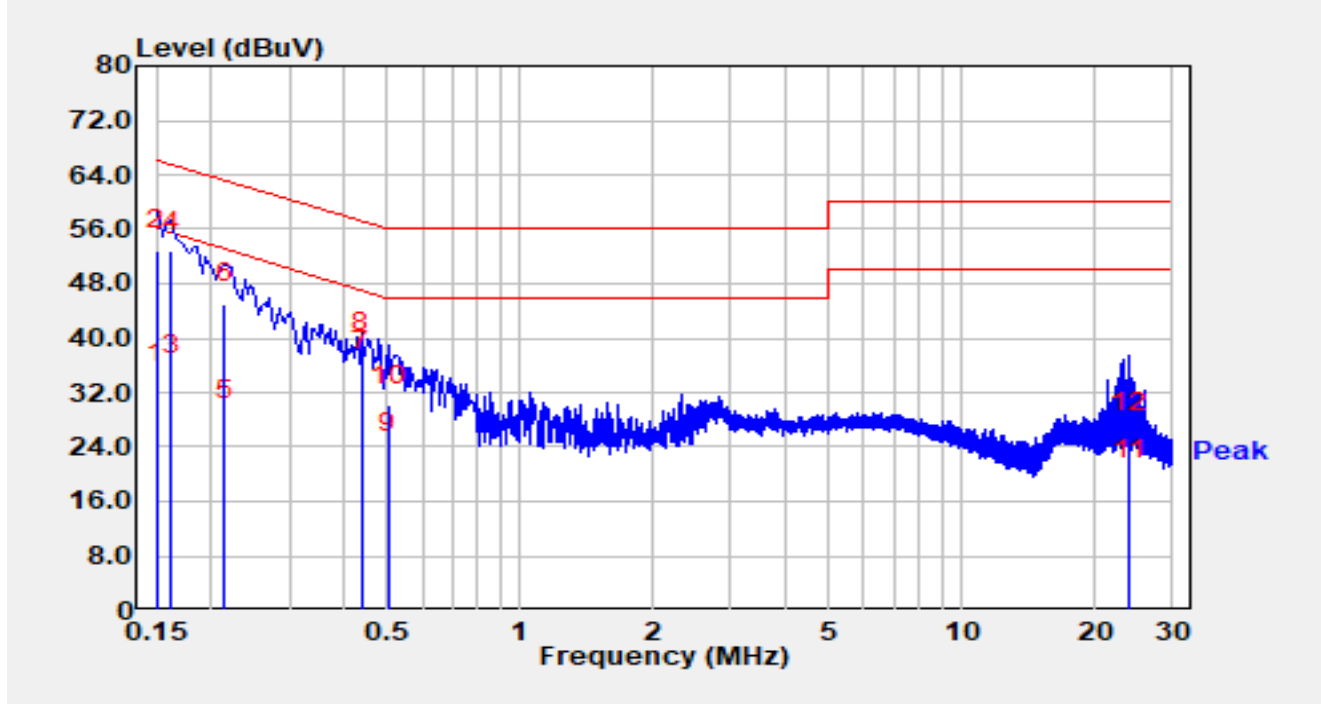

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.150	23.80	9.67	33.47	-22.53	56.00	Average
2		0.150	43.30	9.67	52.97	-13.03	66.00	QP
3		0.162	25.00	9.67	34.67	-20.69	55.36	Average
4		0.162	43.10	9.67	52.77	-12.59	65.36	QP
5		0.214	18.10	9.70	27.80	-25.25	53.05	Average
6		0.214	35.30	9.70	45.00	-18.05	63.05	QP
7	*	0.438	25.40	9.78	35.18	-11.92	47.10	Average
8		0.438	28.00	9.78	37.78	-19.32	57.10	QP
9		0.502	13.30	9.81	23.11	-22.89	46.00	Average
10		0.502	20.30	9.81	30.11	-25.89	56.00	QP
11		23.972	8.80	10.25	19.05	-30.95	50.00	Average
12		23.972	15.80	10.25	26.05	-33.95	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.

2. $C.F (dB) = LISN \text{ Factor } (dB) + \text{Cable Loss } (dB)$.
3. $\text{Measurement } (dB\mu V) = \text{Reading } (dB\mu V) + C.F (dB)$.

Appendix B – Test Setup Photograph

Refer to “2412RSU035-UT” file.

Appendix C – EUT Photograph

Refer to “2412RSU035-UE” file.

The End
