

**Core 1**

|           |                                                                                                                                                                                   |               |           |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------|
| Test Site | WJ-AC2                                                                                                                                                                            | Test Engineer | Bob Zhang |
| Test Date | 2025-02-16                                                                                                                                                                        | Test Mode:    | BLE-1Mbps |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |           |

| Test Channel | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detect or | Polarization |
|--------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|-----------|--------------|
| 00           | 4003.900        | 41.8                 | -1.3          | 40.5                   | 74.0           | -33.5       | Peak      | Horizontal   |
|              | 4814.800        | 41.8                 | 0.0           | 41.8                   | 74.0           | -32.2       | Peak      | Horizontal   |
|              | 11524.700       | 43.0                 | 5.1           | 48.1                   | 74.0           | -25.9       | Peak      | Horizontal   |
|              | 3779.500        | 40.7                 | -1.5          | 39.2                   | 74.0           | -34.8       | Peak      | Vertical     |
|              | 4840.300        | 41.6                 | 0.0           | 41.6                   | 74.0           | -32.4       | Peak      | Vertical     |
|              | 11225.500       | 42.2                 | 5.3           | 47.5                   | 74.0           | -26.5       | Peak      | Vertical     |
| 19           | 4090.600        | 41.1                 | -1.6          | 39.5                   | 74.0           | -34.5       | Peak      | Horizontal   |
|              | 4716.200        | 41.2                 | -0.1          | 41.1                   | 74.0           | -32.9       | Peak      | Horizontal   |
|              | 11426.100       | 42.7                 | 5.4           | 48.1                   | 74.0           | -25.9       | Peak      | Horizontal   |
|              | 3830.500        | 40.2                 | -1.3          | 38.9                   | 74.0           | -35.1       | Peak      | Vertical     |
|              | 4848.800        | 41.5                 | 0.0           | 41.5                   | 74.0           | -32.5       | Peak      | Vertical     |
|              | 11239.100       | 41.7                 | 5.3           | 47.0                   | 74.0           | -27.0       | Peak      | Vertical     |
| 39           | 3847.500        | 41.4                 | -1.4          | 40.0                   | 74.0           | -34.0       | Peak      | Horizontal   |
|              | 4755.300        | 41.6                 | -0.2          | 41.4                   | 74.0           | -32.6       | Peak      | Horizontal   |
|              | 11390.400       | 42.2                 | 5.5           | 47.7                   | 74.0           | -26.3       | Peak      | Horizontal   |
|              | 4075.300        | 41.0                 | -1.5          | 39.5                   | 74.0           | -34.5       | Peak      | Vertical     |
|              | 4746.800        | 42.2                 | -0.2          | 42.0                   | 74.0           | -32.0       | Peak      | Vertical     |
|              | 11472.000       | 42.4                 | 5.4           | 47.8                   | 74.0           | -26.2       | Peak      | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |           |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------|
| Test Site | WJ-AC2                                                                                                                                                                            | Test Engineer | Bob Zhang |
| Test Date | 2025-02-24                                                                                                                                                                        | Test Mode:    | BLE-2Mbps |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |           |

| Test Channel                                                                                                                                             | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detect or | Polarization |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|-----------|--------------|
| 00                                                                                                                                                       | 3764.200        | 42.4                 | -1.6          | 40.8                   | 74.0           | -33.2       | Peak      | Horizontal   |
|                                                                                                                                                          | 7397.100        | 42.7                 | 5.2           | 47.9                   | 74.0           | -26.1       | Peak      | Horizontal   |
|                                                                                                                                                          | 11378.500       | 43.8                 | 5.5           | 49.3                   | 74.0           | -24.7       | Peak      | Horizontal   |
|                                                                                                                                                          | 3867.900        | 42.9                 | -1.5          | 41.4                   | 74.0           | -32.6       | Peak      | Vertical     |
|                                                                                                                                                          | 4770.600        | 42.5                 | 0.0           | 42.5                   | 74.0           | -31.5       | Peak      | Vertical     |
|                                                                                                                                                          | 11269.700       | 43.2                 | 5.4           | 48.6                   | 74.0           | -25.4       | Peak      | Vertical     |
| 19                                                                                                                                                       | 3703.000        | 43.6                 | -1.9          | 41.7                   | 74.0           | -32.3       | Peak      | Horizontal   |
|                                                                                                                                                          | 4864.100        | 44.3                 | 0.1           | 44.4                   | 74.0           | -29.6       | Peak      | Horizontal   |
|                                                                                                                                                          | 11431.200       | 43.0                 | 5.4           | 48.4                   | 74.0           | -25.6       | Peak      | Horizontal   |
|                                                                                                                                                          | 3791.400        | 43.0                 | -1.5          | 41.5                   | 74.0           | -32.5       | Peak      | Vertical     |
|                                                                                                                                                          | 4796.100        | 42.7                 | 0.0           | 42.7                   | 74.0           | -31.3       | Peak      | Vertical     |
|                                                                                                                                                          | 11672.600       | 45.2                 | 4.8           | 50.0                   | 74.0           | -24.0       | Peak      | Vertical     |
| 39                                                                                                                                                       | 4145.000        | 42.6                 | -1.8          | 40.8                   | 74.0           | -33.2       | Peak      | Horizontal   |
|                                                                                                                                                          | 4823.300        | 42.3                 | 0.0           | 42.3                   | 74.0           | -31.7       | Peak      | Horizontal   |
|                                                                                                                                                          | 11531.500       | 43.6                 | 5.1           | 48.7                   | 74.0           | -25.3       | Peak      | Horizontal   |
|                                                                                                                                                          | 4003.900        | 42.3                 | -1.3          | 41.0                   | 74.0           | -33.0       | Peak      | Vertical     |
|                                                                                                                                                          | 4857.300        | 43.0                 | 0.1           | 43.1                   | 74.0           | -30.9       | Peak      | Vertical     |
|                                                                                                                                                          | 11087.800       | 44.2                 | 5.0           | 49.2                   | 74.0           | -24.8       | Peak      | Vertical     |
| Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)<br>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |           |              |

**Core 0 and Core 1 simultaneous transmission**


|           |                                                                                                                                                                                   |               |           |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------|
| Test Site | WJ-AC2                                                                                                                                                                            | Test Engineer | Bob Zhang |
| Test Date | 2025-02-11                                                                                                                                                                        | Test Mode:    | BLE-1Mbps |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |           |

| Test Channel                                                                                                                                             | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detect or | Polarization |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|-----------|--------------|
| 00+01                                                                                                                                                    | 3988.025        | 42.2                 | -1.4          | 40.8                   | 74.0           | -33.2       | Peak      | Horizontal   |
|                                                                                                                                                          | 4822.275        | 42.9                 | 0.0           | 42.9                   | 74.0           | -31.1       | Peak      | Horizontal   |
|                                                                                                                                                          | 7410.800        | 40.8                 | 5.2           | 46.0                   | 74.0           | -28.0       | Peak      | Horizontal   |
|                                                                                                                                                          | 4000.950        | 42.5                 | -1.3          | 41.2                   | 74.0           | -32.8       | Peak      | Vertical     |
|                                                                                                                                                          | 5020.850        | 43.5                 | 0.1           | 43.6                   | 74.0           | -30.4       | Peak      | Vertical     |
|                                                                                                                                                          | 7570.600        | 38.8                 | 5.0           | 43.8                   | 74.0           | -30.2       | Peak      | Vertical     |
| 19+20                                                                                                                                                    | 3776.525        | 43.6                 | -1.5          | 42.1                   | 74.0           | -31.9       | Peak      | Horizontal   |
|                                                                                                                                                          | 4816.400        | 42.7                 | 0.0           | 42.7                   | 74.0           | -31.3       | Peak      | Horizontal   |
|                                                                                                                                                          | 7474.250        | 41.9                 | 5.2           | 47.1                   | 74.0           | -26.9       | Peak      | Horizontal   |
|                                                                                                                                                          | 3867.000        | 43.1                 | -1.5          | 41.6                   | 74.0           | -32.4       | Peak      | Vertical     |
|                                                                                                                                                          | 4750.600        | 43.3                 | -0.2          | 43.1                   | 74.0           | -30.9       | Peak      | Vertical     |
|                                                                                                                                                          | 8324.950        | 40.8                 | 5.8           | 46.6                   | 74.0           | -27.4       | Peak      | Vertical     |
| 38+39<br>(Same Power Setting)                                                                                                                            | 4025.625        | 42.9                 | -1.5          | 41.4                   | 74.0           | -32.6       | Peak      | Horizontal   |
|                                                                                                                                                          | 5024.375        | 42.7                 | 0.2           | 42.9                   | 74.0           | -31.1       | Peak      | Horizontal   |
|                                                                                                                                                          | 7450.750        | 41.2                 | 5.0           | 46.2                   | 74.0           | -27.8       | Peak      | Horizontal   |
|                                                                                                                                                          | 3875.225        | 42.5                 | -1.6          | 40.9                   | 74.0           | -33.1       | Peak      | Vertical     |
|                                                                                                                                                          | 4735.325        | 42.5                 | -0.1          | 42.4                   | 74.0           | -31.6       | Peak      | Vertical     |
|                                                                                                                                                          | 7575.300        | 42.6                 | 5.0           | 47.6                   | 74.0           | -26.4       | Peak      | Vertical     |
| Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)<br>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |           |              |

| Test Channel                                                                                                                                             | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detect or | Polarization |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|-----------|--------------|
| 38+39<br>(Different Power Settings)                                                                                                                      | 3778.875        | 42.0                 | -1.5          | 40.5                   | 74.0           | -33.5       | Peak      | Horizontal   |
|                                                                                                                                                          | 4852.825        | 43.4                 | 0.1           | 43.5                   | 74.0           | -30.5       | Peak      | Horizontal   |
|                                                                                                                                                          | 11430.470       | 43.5                 | 5.4           | 48.9                   | 74.0           | -25.1       | Peak      | Horizontal   |
|                                                                                                                                                          | 3682.525        | 43.9                 | -1.9          | 42.0                   | 74.0           | -32.0       | Peak      | Vertical     |
|                                                                                                                                                          | 4858.700        | 42.6                 | 0.1           | 42.7                   | 74.0           | -31.3       | Peak      | Vertical     |
|                                                                                                                                                          | 11674.880       | 43.9                 | 4.8           | 48.7                   | 74.0           | -25.3       | Peak      | Vertical     |
| Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)<br>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |           |              |

### The Result of Radiated Emission below 30MHz:

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-14 |
| Temperature | 15.1 °C                          | Humidity      | 29.7 %     |
| Limit       | FCC_Part 15.209_RSE (3m)         | Test Engineer | Bob Zhang  |
| Factor      | FMZB 1519-60 D_07076_00031       | Polarity      | Coaxial    |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2402MHz |               |            |

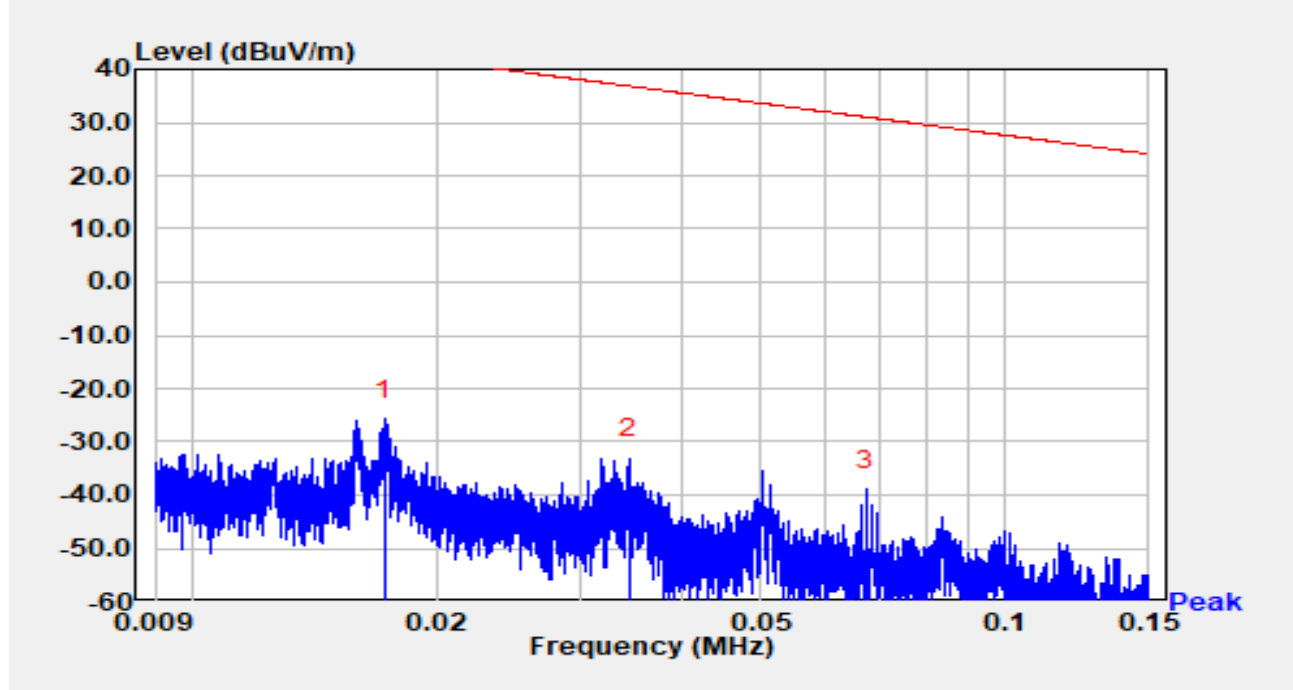


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 0.017           | 34.08          | -59.75     | -25.66               | -68.53      | 42.87          | Peak     |
| 2  |      | 0.034           | 27.09          | -60.11     | -33.02               | -69.87      | 36.85          | Peak     |
| 3  |      | 0.067           | 21.22          | -60.19     | -38.97               | -69.98      | 31.02          | Peak     |

#### Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) +  $40\log(d1/d2)$  (dB),  $d1 = 3m$ ,  $d2 = 300m$  (9kHz-490kHz) or 30m (490kHz-30MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-14 |
| Temperature | 15.1 °C                          | Humidity      | 29.7 %     |
| Limit       | FCC_Part 15.209_RSE (3m)         | Test Engineer | Bob Zhang  |
| Factor      | FMZB 1519-60 D_07076_00031       | Polarity      | Coaxial    |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2402MHz |               |            |

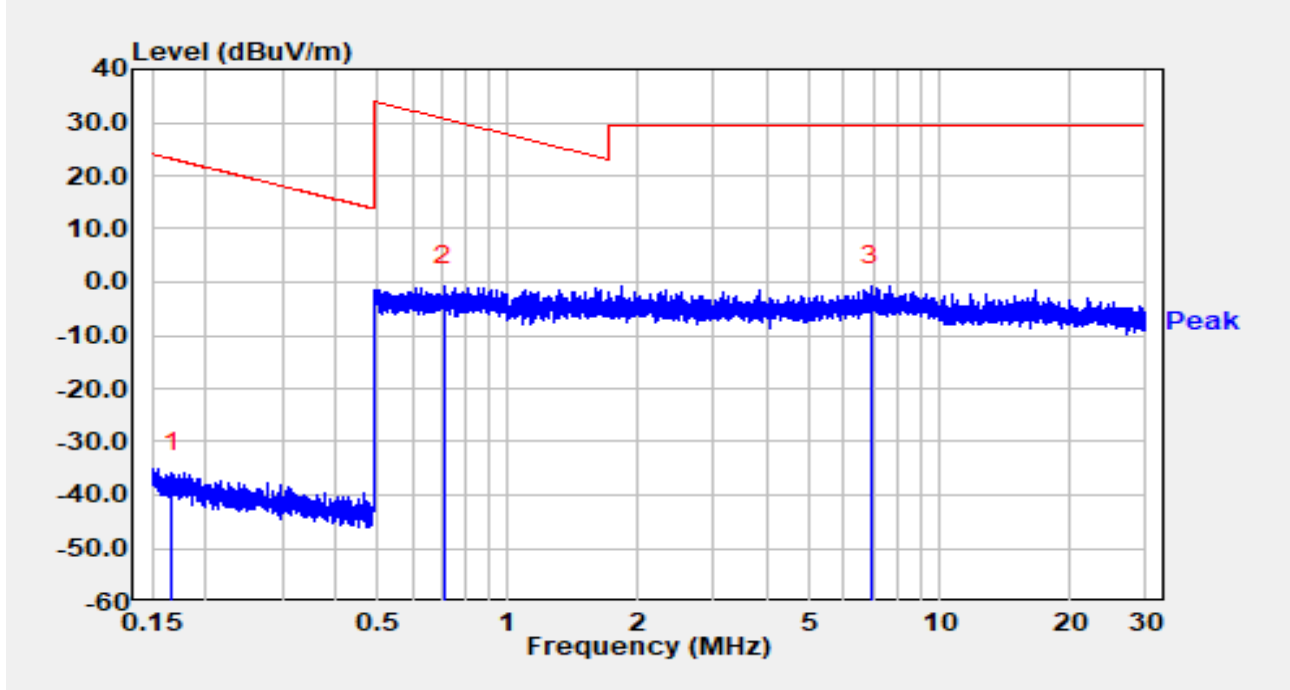


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 0.166           | 24.60          | -60.27     | -35.67               | -58.85      | 23.18          | Peak     |
| 2  |      | 0.712           | 19.80          | -20.39     | -0.60                | -31.16      | 30.56          | Peak     |
| 3  | *    | 6.914           | 19.90          | -20.49     | -0.59                | -30.09      | 29.50          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3m, d2 = 300m (9kHz-490kHz) or 30m (490kHz-30MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-14 |
| Temperature | 15.1 °C                          | Humidity      | 29.7 %     |
| Limit       | FCC_Part 15.209_RSE (3m)         | Test Engineer | Bob Zhang  |
| Factor      | FMZB 1519-60 D_07076_00031       | Polarity      | Coplanar   |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2402MHz |               |            |

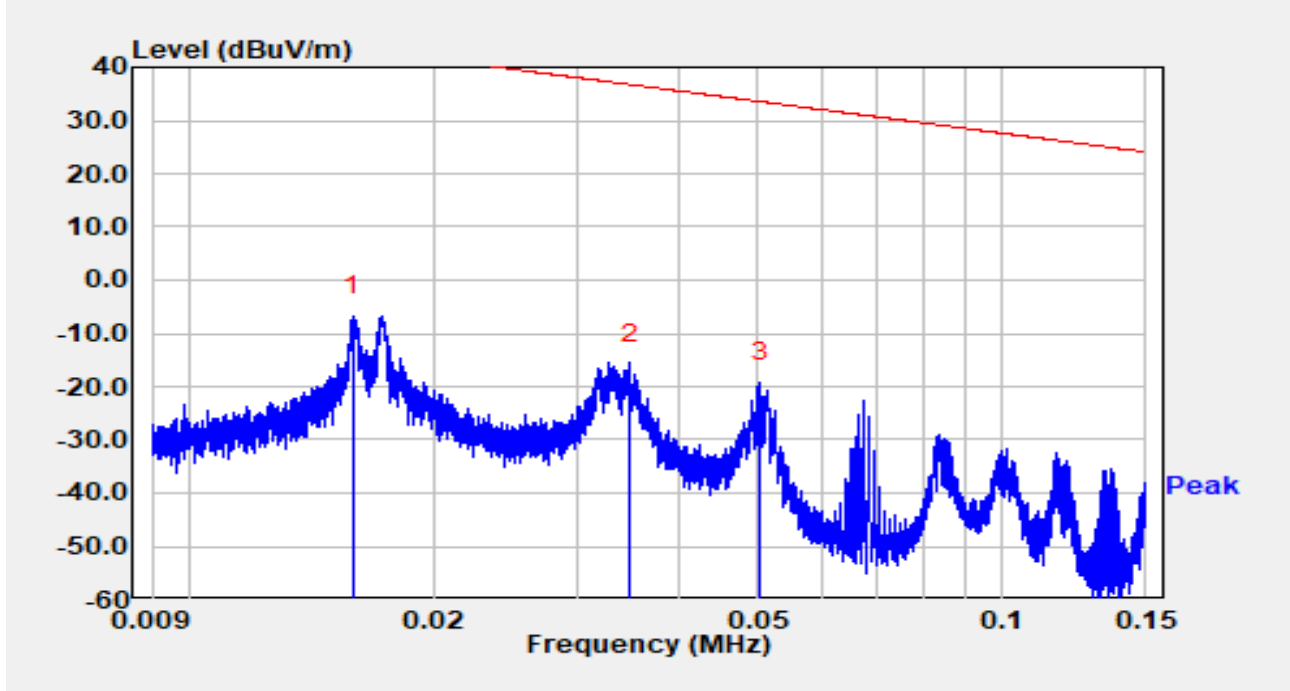


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 0.016           | 53.04          | -59.66     | -6.62                | -50.19      | 43.57          | Peak     |
| 2  |      | 0.035           | 44.54          | -60.11     | -15.58               | -52.34      | 36.76          | Peak     |
| 3  |      | 0.050           | 41.05          | -60.17     | -19.12               | -52.69      | 33.57          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3m, d2 = 300m (9kHz-490kHz) or 30m (490kHz-30MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-14 |
| Temperature | 15.1 °C                          | Humidity      | 29.7 %     |
| Limit       | FCC_Part 15.209_RSE (3m)         | Test Engineer | Bob Zhang  |
| Factor      | FMZB 1519-60 D_07076_00031       | Polarity      | Coplanar   |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2402MHz |               |            |

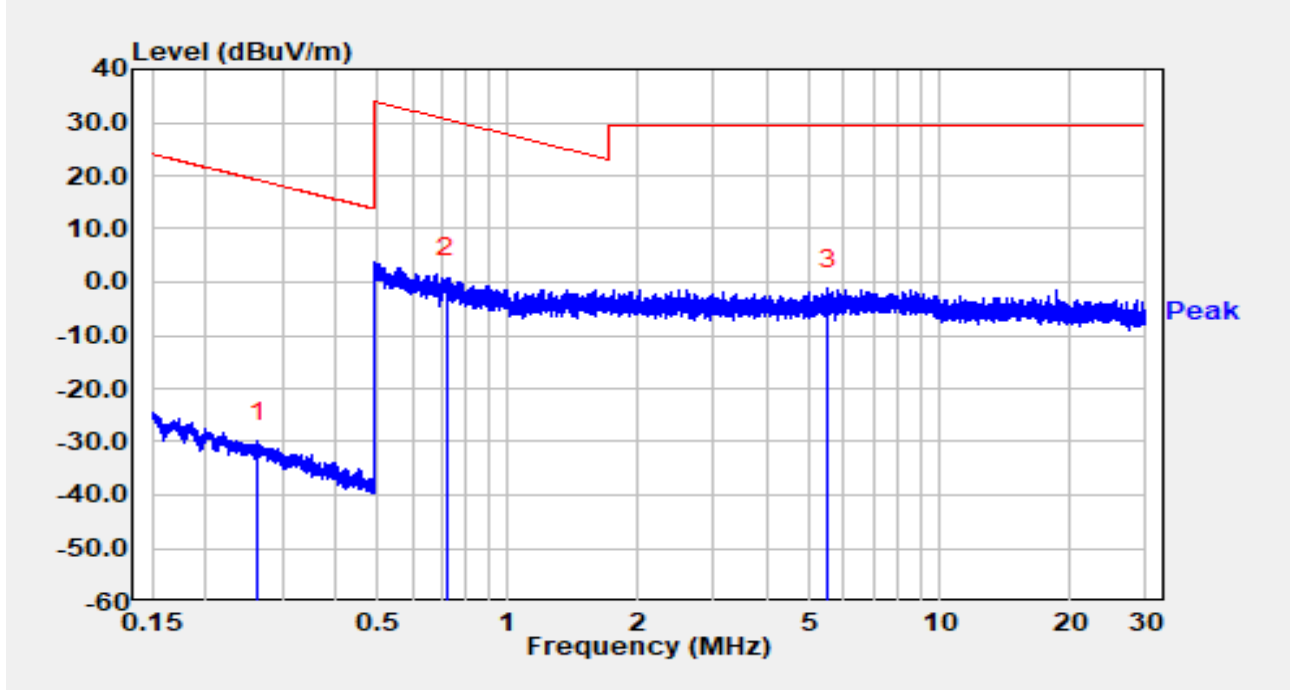


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 0.263           | 30.38          | -60.31     | -29.94               | -49.15      | 19.21          | Peak     |
| 2  | *    | 0.722           | 21.16          | -20.39     | 0.76                 | -29.68      | 30.44          | Peak     |
| 3  |      | 5.517           | 19.33          | -20.54     | -1.21                | -30.71      | 29.50          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3m, d2 = 300m (9kHz-490kHz) or 30m (490kHz-30MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

### The Result of Radiated Emission below 1GHz:

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-14 |
| Temperature | 15.1 °C                          | Humidity      | 29.7 %     |
| Limit       | FCC_Part 15.209_RSE(3m)          | Test Engineer | Bob Zhang  |
| Factor      | VULB 9163_07097                  | Polarity      | Horizontal |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2402MHz |               |            |

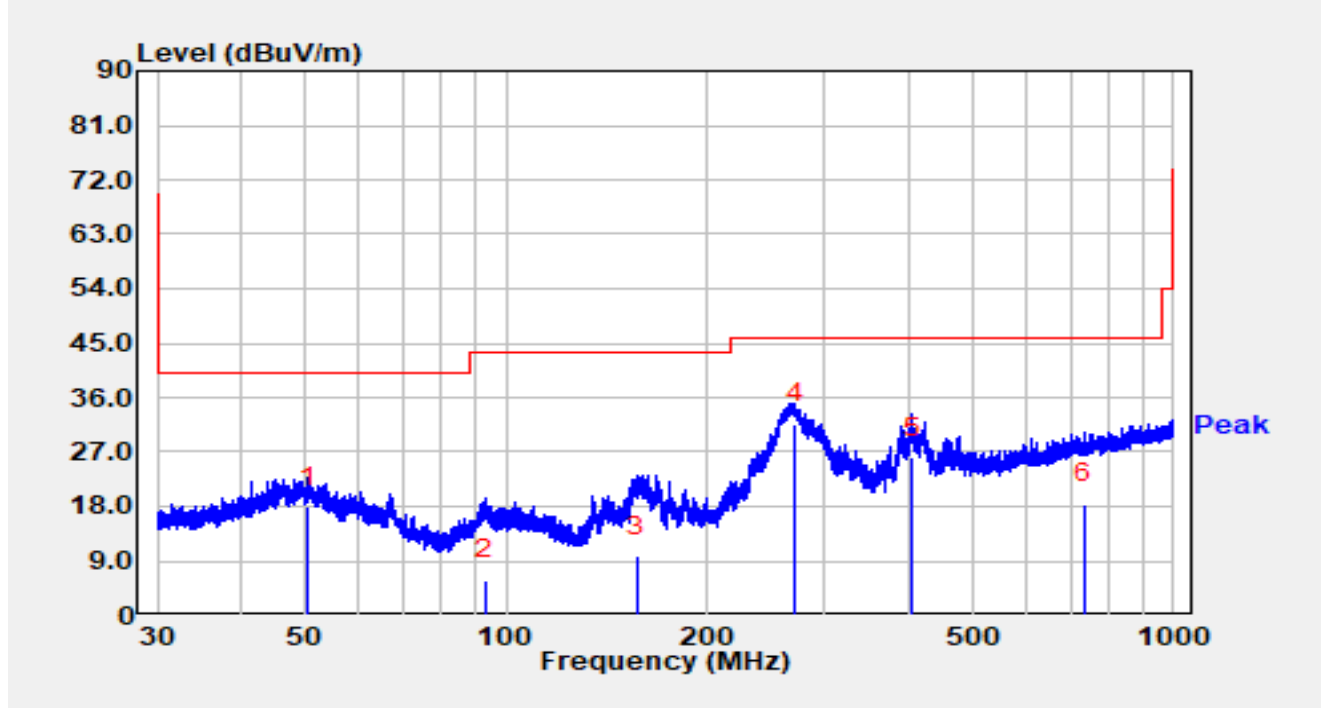


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 50.444          | -1.60          | 19.46      | 17.86                | -22.14      | 40.00          | QP       |
| 2  |      | 92.820          | -10.50         | 16.34      | 5.84                 | -37.66      | 43.50          | QP       |
| 3  |      | 156.787         | -4.50          | 14.26      | 9.76                 | -33.74      | 43.50          | QP       |
| 4  | *    | 270.849         | 12.30          | 19.33      | 31.63                | -14.37      | 46.00          | QP       |
| 5  |      | 406.515         | 3.40           | 22.60      | 26.00                | -20.00      | 46.00          | QP       |
| 6  |      | 733.205         | -9.30          | 27.80      | 18.50                | -27.50      | 46.00          | QP       |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-14 |
| Temperature | 15.1 °C                          | Humidity      | 29.7 %     |
| Limit       | FCC_Part 15.209_RSE(3m)          | Test Engineer | Bob Zhang  |
| Factor      | VULB 9163_07097                  | Polarity      | Vertical   |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2402MHz |               |            |

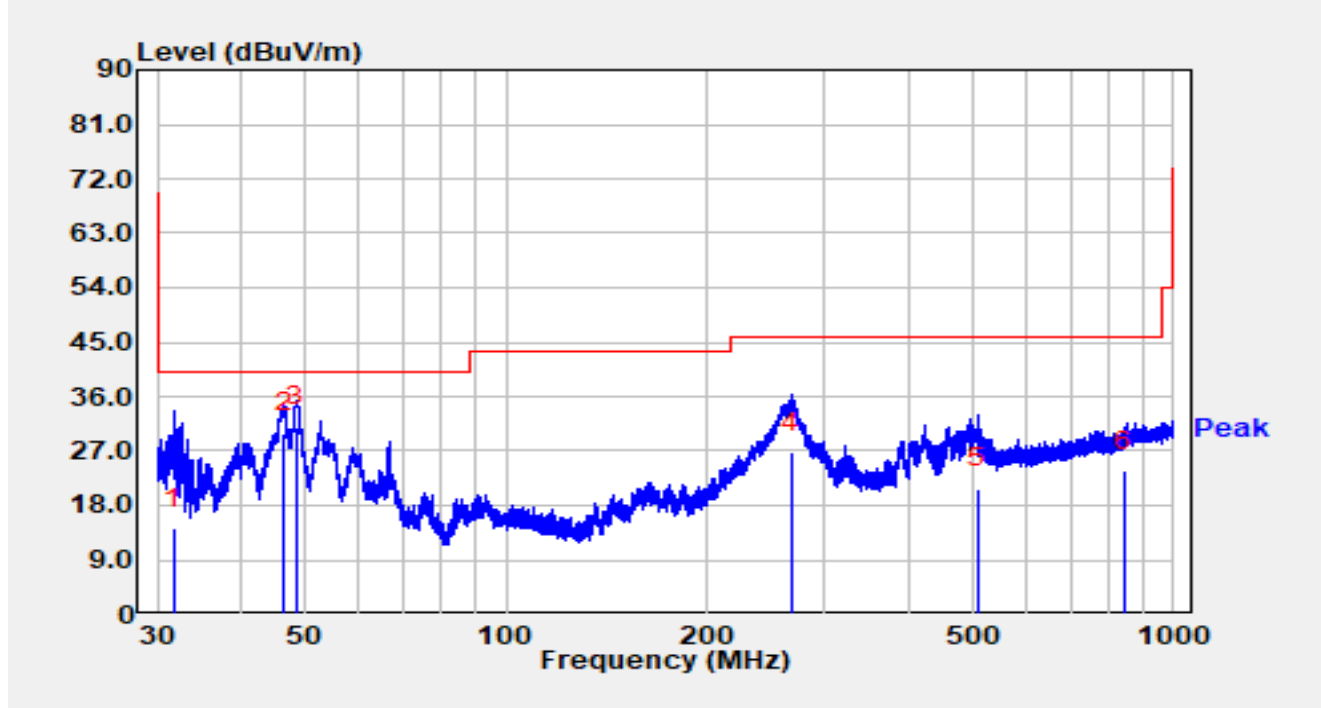


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 31.754          | -2.20          | 16.31      | 14.11                | -25.89      | 40.00          | QP       |
| 2  |      | 46.389          | 10.50          | 19.45      | 29.95                | -10.05      | 40.00          | QP       |
| 3  | *    | 48.485          | 11.40          | 19.51      | 30.91                | -9.09       | 40.00          | QP       |
| 4  |      | 267.546         | 7.50           | 19.27      | 26.77                | -19.23      | 46.00          | QP       |
| 5  |      | 507.546         | -3.50          | 24.31      | 20.81                | -25.19      | 46.00          | QP       |
| 6  |      | 841.539         | -5.20          | 28.83      | 23.63                | -22.37      | 46.00          | QP       |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

### The Result of Radiated Emission above 18GHz:

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-15 |
| Temperature | 20.3 °C                          | Humidity      | 39.3 %     |
| Limit       | FCC_Part 15.209_RSE (3m)         | Test Engineer | Carl Jiang |
| Factor      | BBHA 9170_07100                  | Polarity      | Horizontal |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2402MHz |               |            |

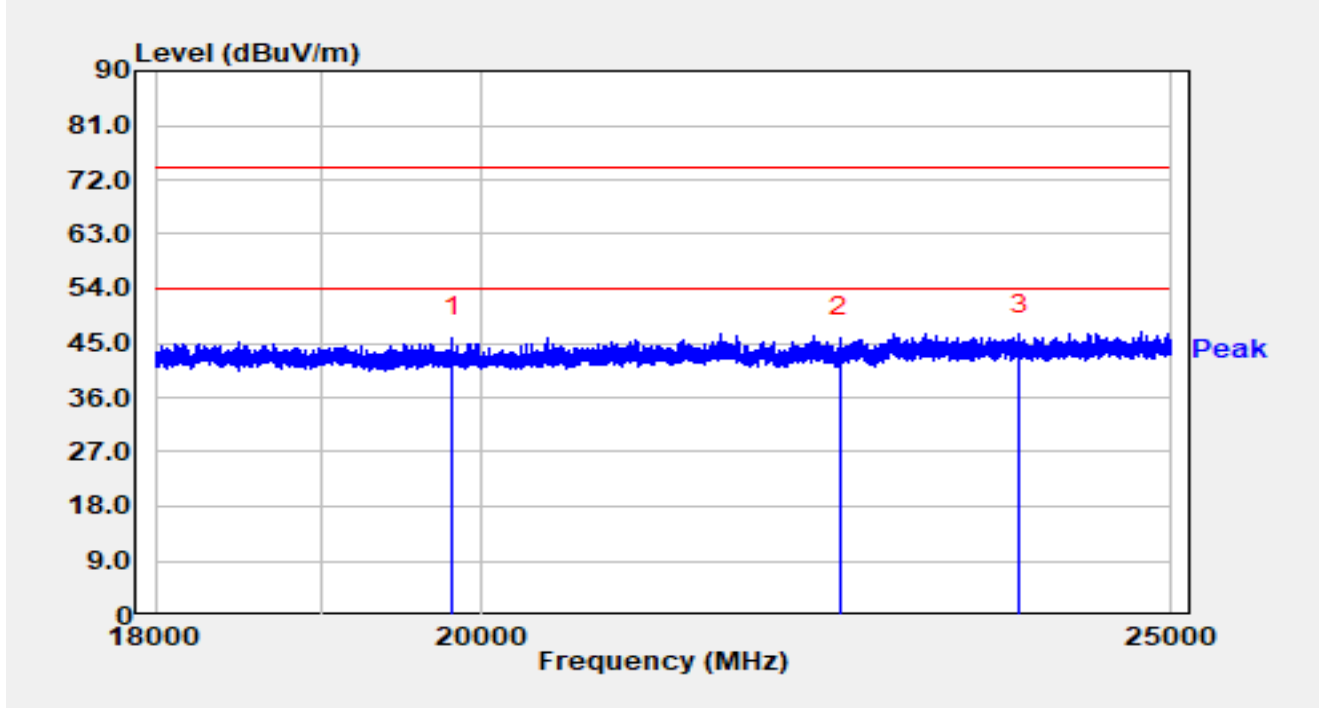


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 19811.600       | 53.68          | -7.71      | 45.96                | -28.04      | 74.00          | Peak     |
| 2  |      | 22460.400       | 51.14          | -5.13      | 46.01                | -27.99      | 74.00          | Peak     |
| 3  | *    | 23798.100       | 50.43          | -3.91      | 46.52                | -27.48      | 74.00          | Peak     |

#### Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-15 |
| Temperature | 20.3 °C                          | Humidity      | 39.3 %     |
| Limit       | FCC_Part 15.209_RSE (3m)         | Test Engineer | Carl Jiang |
| Factor      | BBHA 9170_07100                  | Polarity      | Vertical   |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2402MHz |               |            |

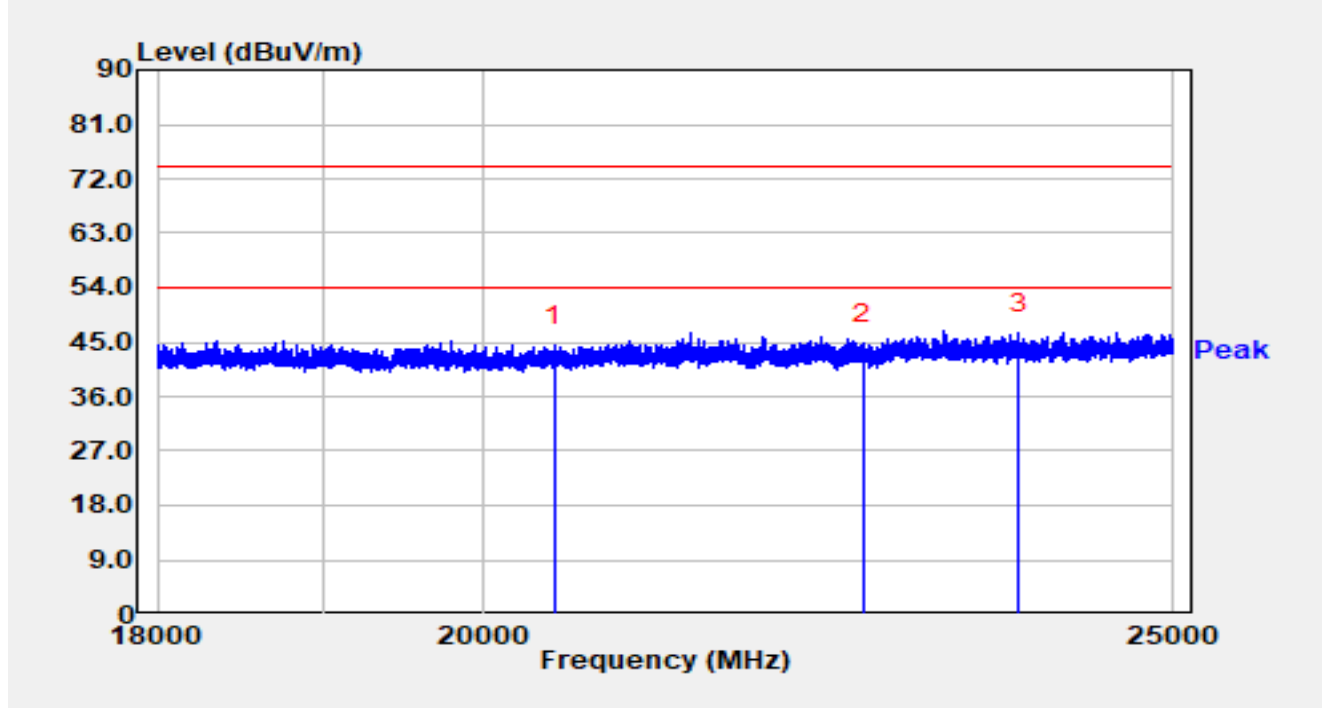

| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 20463.300       | 51.96          | -7.54      | 44.42                | -29.58      | 74.00          | Peak     |
| 2  |      | 22615.800       | 49.54          | -4.74      | 44.80                | -29.20      | 74.00          | Peak     |
| 3  | *    | 23781.300       | 50.45          | -3.92      | 46.52                | -27.48      | 74.00          | Peak     |


Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

## A.7 Radiated Restricted Band Edge Test Result

### Core 0

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_PK    | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                    | Polarity      | Horizontal |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2402MHz |               |            |

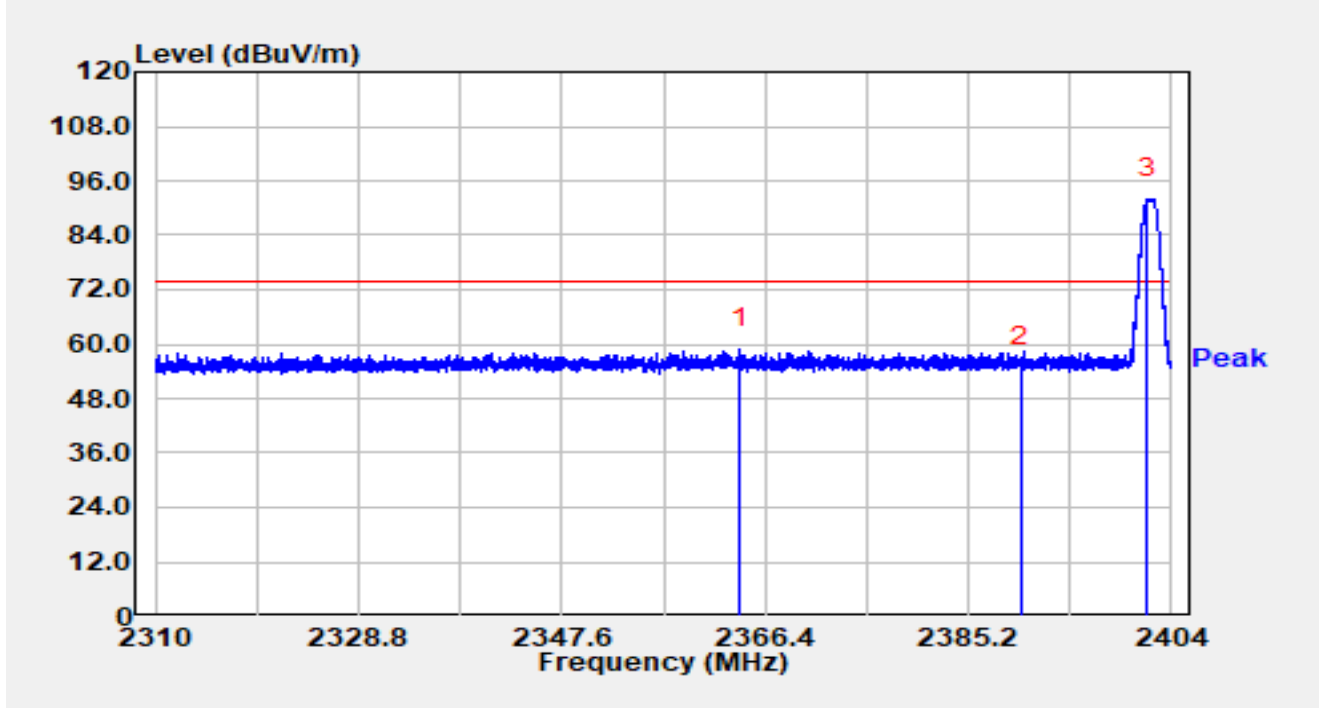


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2364.050        | 29.34          | 29.55      | 58.89                | -15.11      | 74.00          | Peak     |
| 2  |      | 2390.000        | 25.55          | 29.59      | 55.14                | -18.86      | 74.00          | Peak     |
| 3  |      | 2401.781        | 62.32          | 29.64      | 91.96                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_AV    | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                    | Polarity      | Horizontal |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2402MHz |               |            |

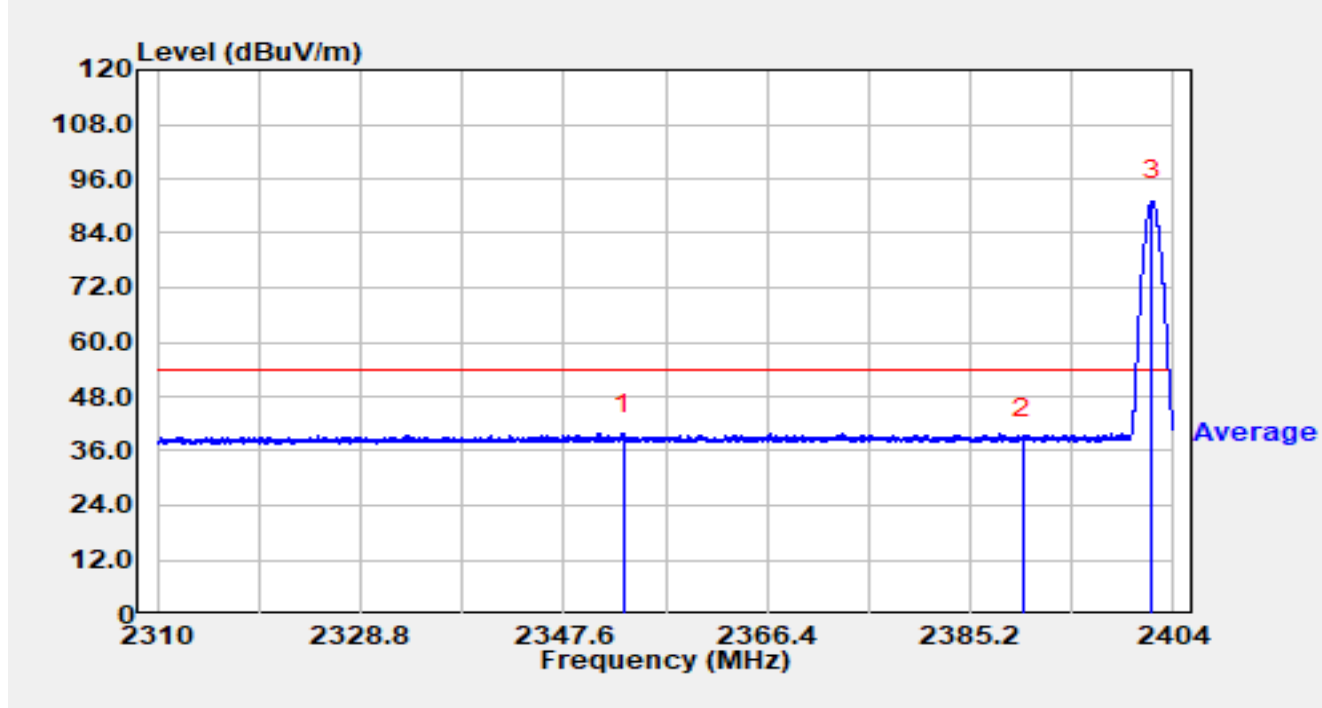


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2353.061        | 10.24          | 29.52      | 39.77                | -14.23      | 54.00          | Average  |
| 2  |      | 2390.000        | 9.08           | 29.59      | 38.67                | -15.33      | 54.00          | Average  |
| 3  |      | 2402.026        | 61.41          | 29.64      | 91.05                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_PK    | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                    | Polarity      | Vertical   |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2402MHz |               |            |

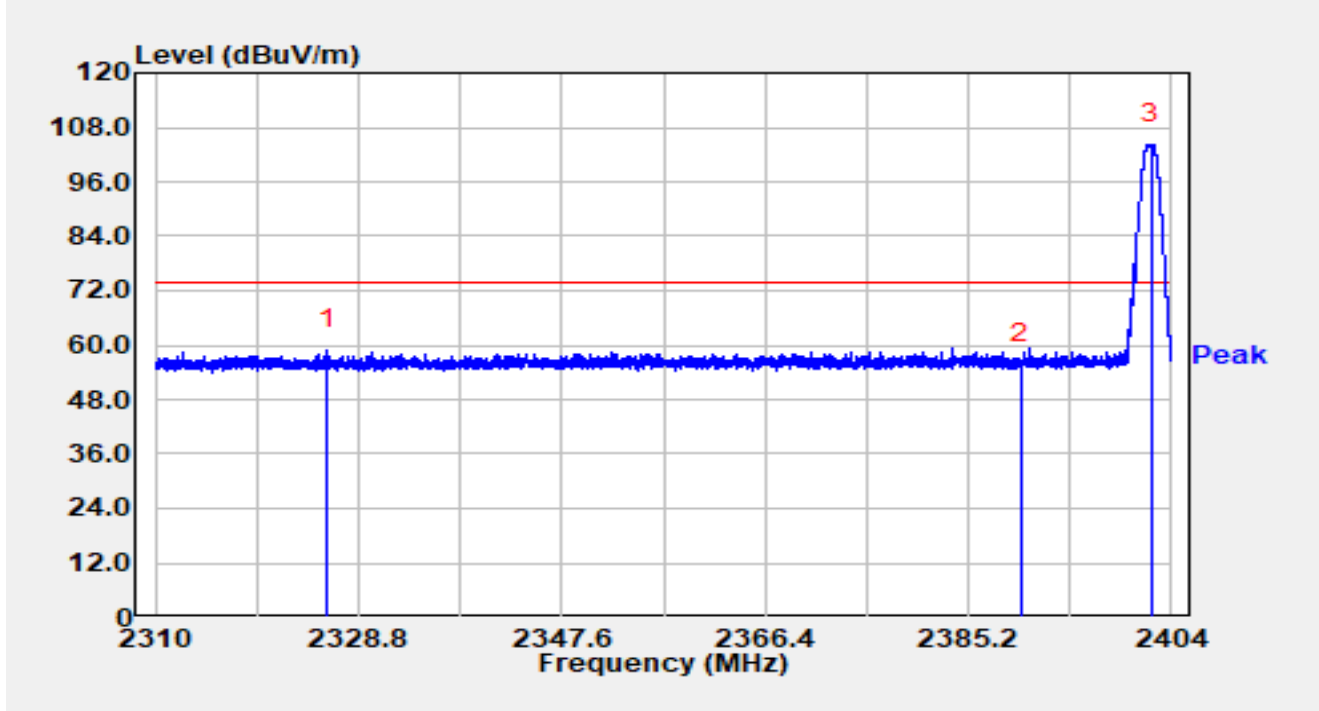


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2325.914        | 29.45          | 29.45      | 58.89                | -15.11      | 74.00          | Peak     |
| 2  |      | 2390.000        | 26.44          | 29.59      | 56.03                | -17.97      | 74.00          | Peak     |
| 3  |      | 2402.148        | 74.51          | 29.64      | 104.15               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_AV    | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                    | Polarity      | Vertical   |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2402MHz |               |            |

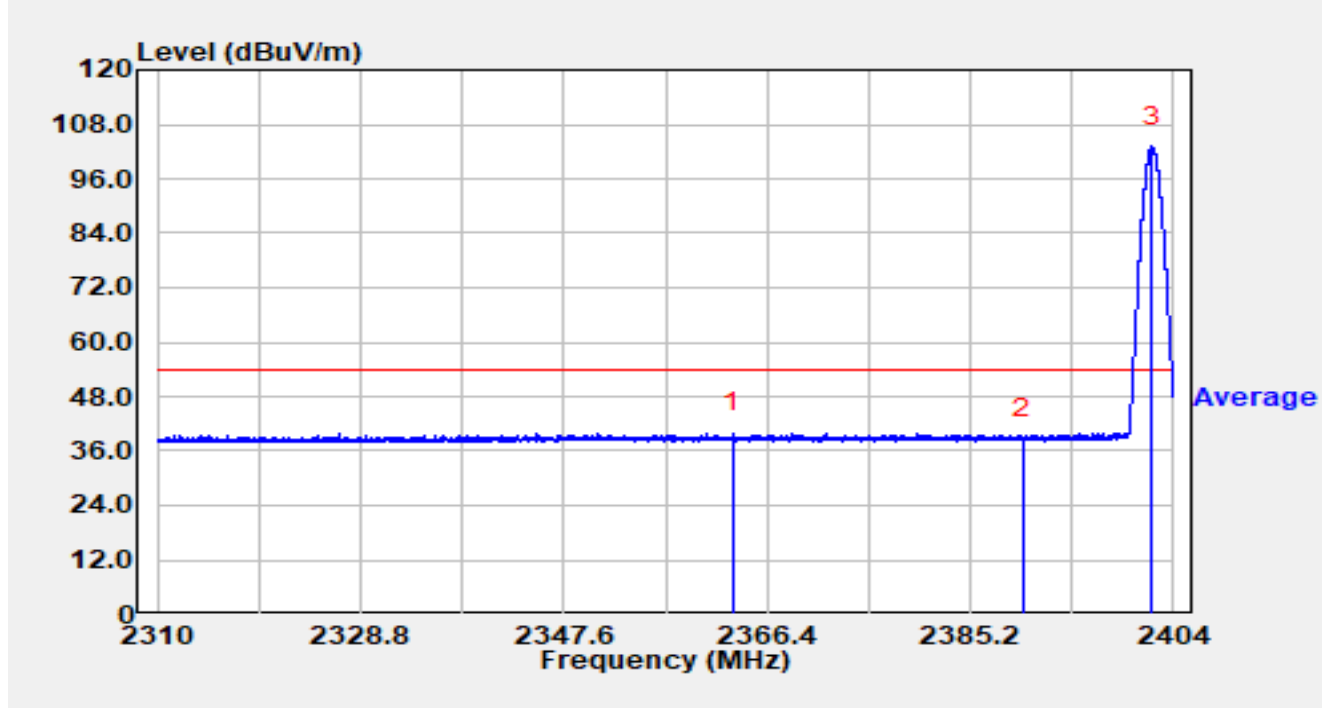


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2363.251        | 10.32          | 29.55      | 39.87                | -14.13      | 54.00          | Average  |
| 2  |      | 2390.000        | 9.17           | 29.59      | 38.76                | -15.24      | 54.00          | Average  |
| 3  |      | 2402.054        | 73.39          | 29.64      | 103.03               | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_PK    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Horizontal |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2480MHz |               |            |

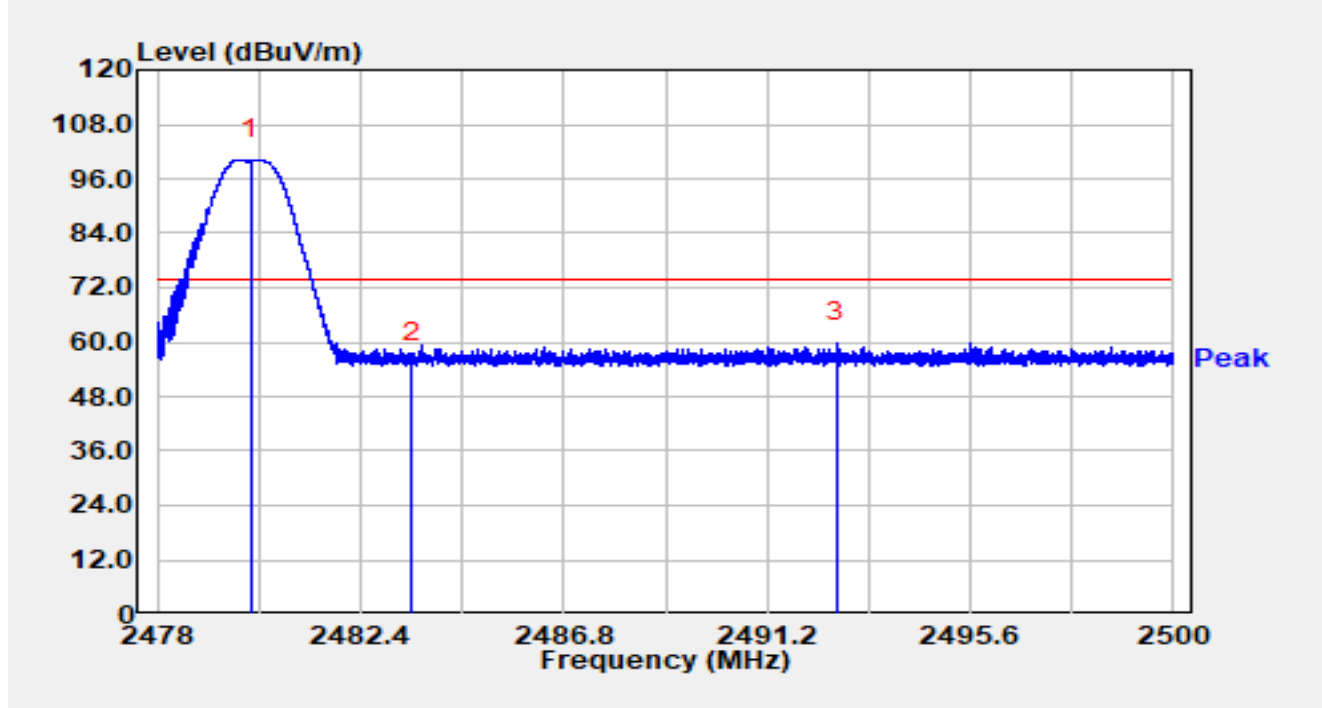


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.020        | 70.41          | 29.75      | 100.16               | N/A         | N/A            | Peak     |
| 2  |      | 2483.500        | 25.82          | 29.76      | 55.59                | -18.41      | 74.00          | Peak     |
| 3  | *    | 2492.711        | 30.11          | 29.79      | 59.90                | -14.10      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_AV    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Horizontal |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2480MHz |               |            |

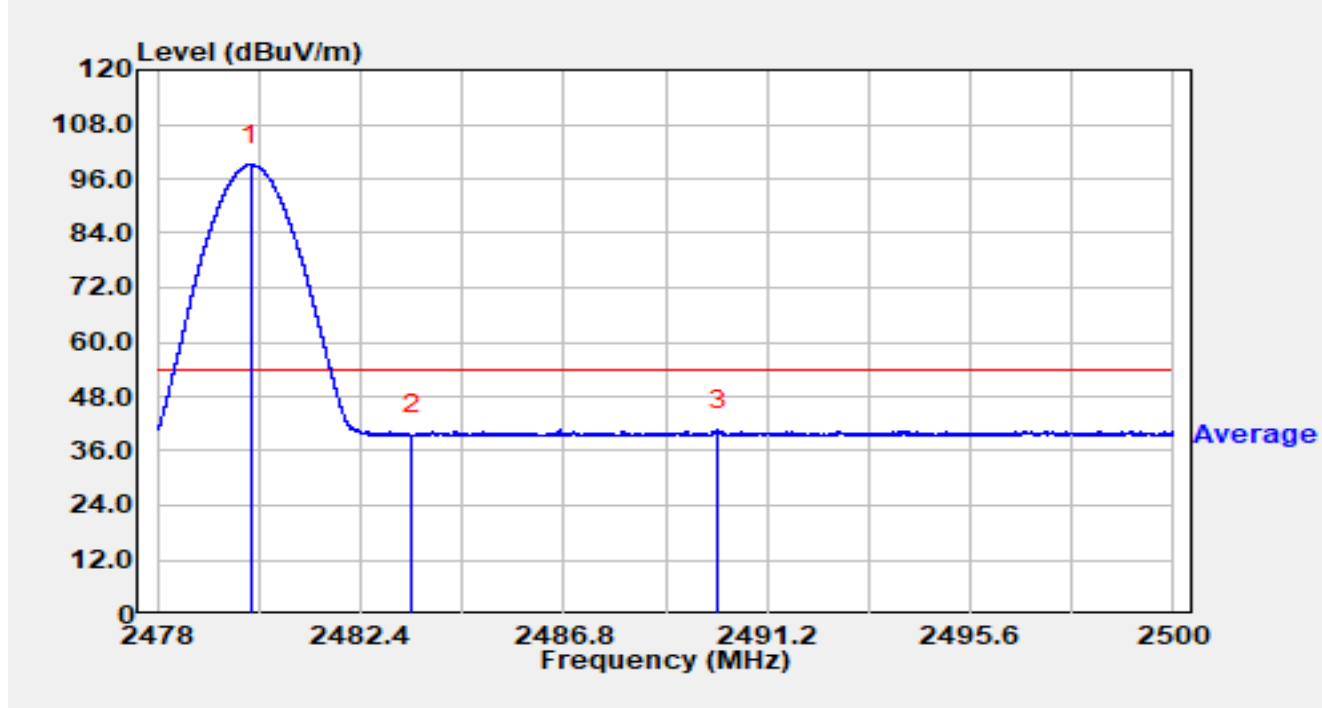


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.033        | 69.36          | 29.75      | 99.11                | N/A         | N/A            | Average  |
| 2  |      | 2483.500        | 9.71           | 29.76      | 39.48                | -14.52      | 54.00          | Average  |
| 3  | *    | 2490.131        | 10.94          | 29.79      | 40.73                | -13.27      | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_PK    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Vertical   |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2480MHz |               |            |

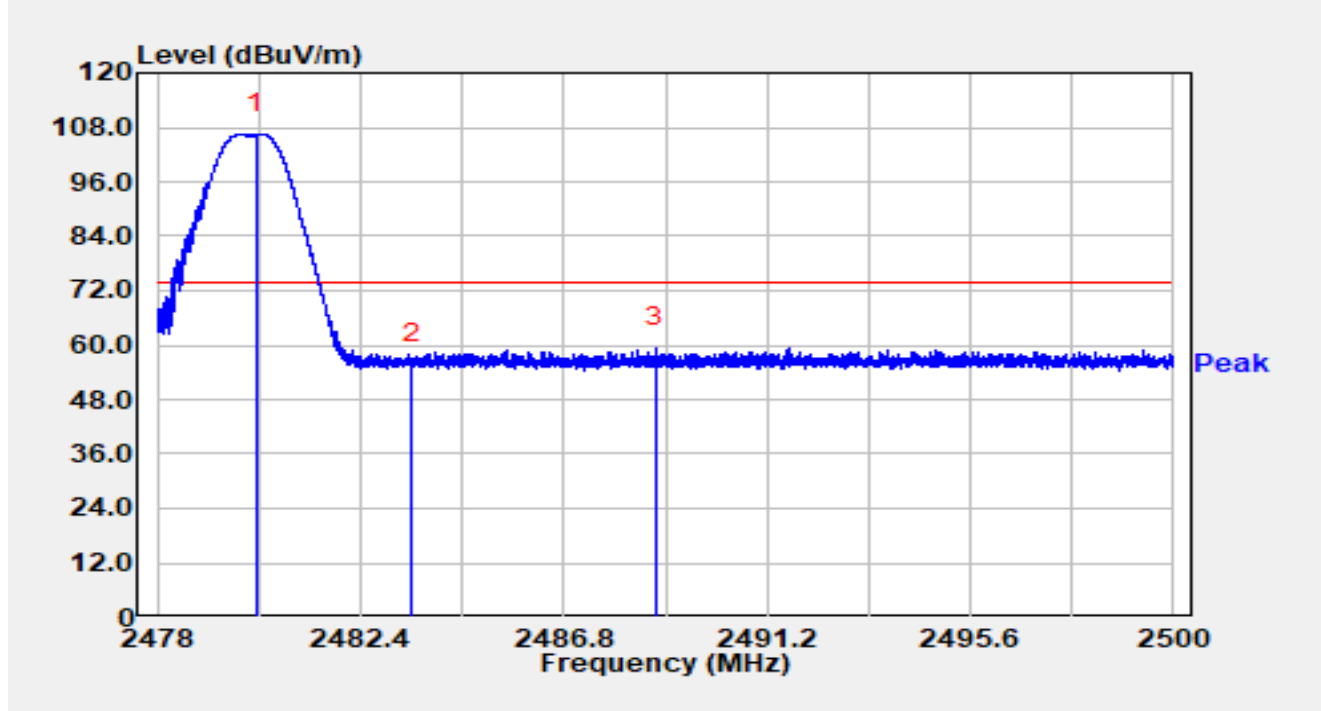


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.125        | 76.80          | 29.75      | 106.56               | N/A         | N/A            | Peak     |
| 2  |      | 2483.500        | 26.25          | 29.76      | 56.01                | -17.99      | 74.00          | Peak     |
| 3  | *    | 2488.793        | 29.68          | 29.78      | 59.46                | -14.54      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_AV    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Vertical   |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2480MHz |               |            |

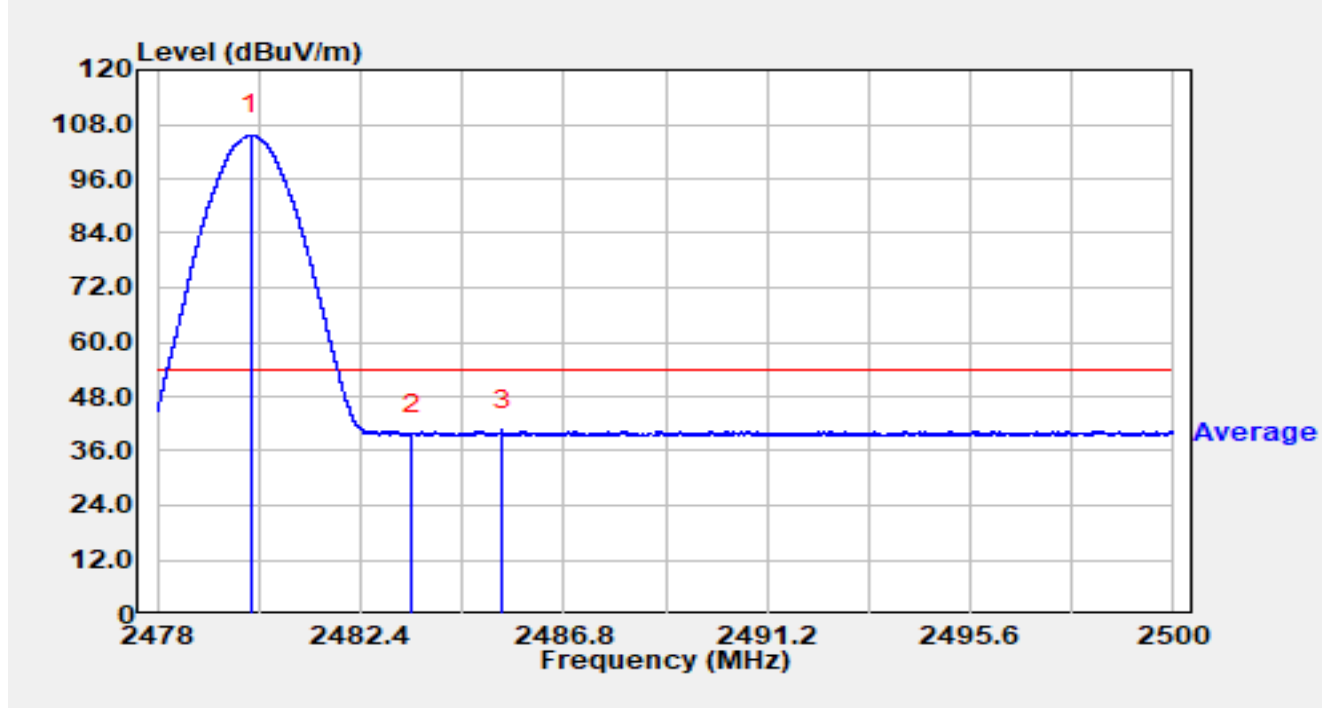


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.035        | 75.83          | 29.75      | 105.58               | N/A         | N/A            | Average  |
| 2  |      | 2483.500        | 9.92           | 29.76      | 39.69                | -14.31      | 54.00          | Average  |
| 3  | *    | 2485.458        | 10.92          | 29.77      | 40.69                | -13.31      | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_PK    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Horizontal |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 2Mbps at 2402MHz |               |            |

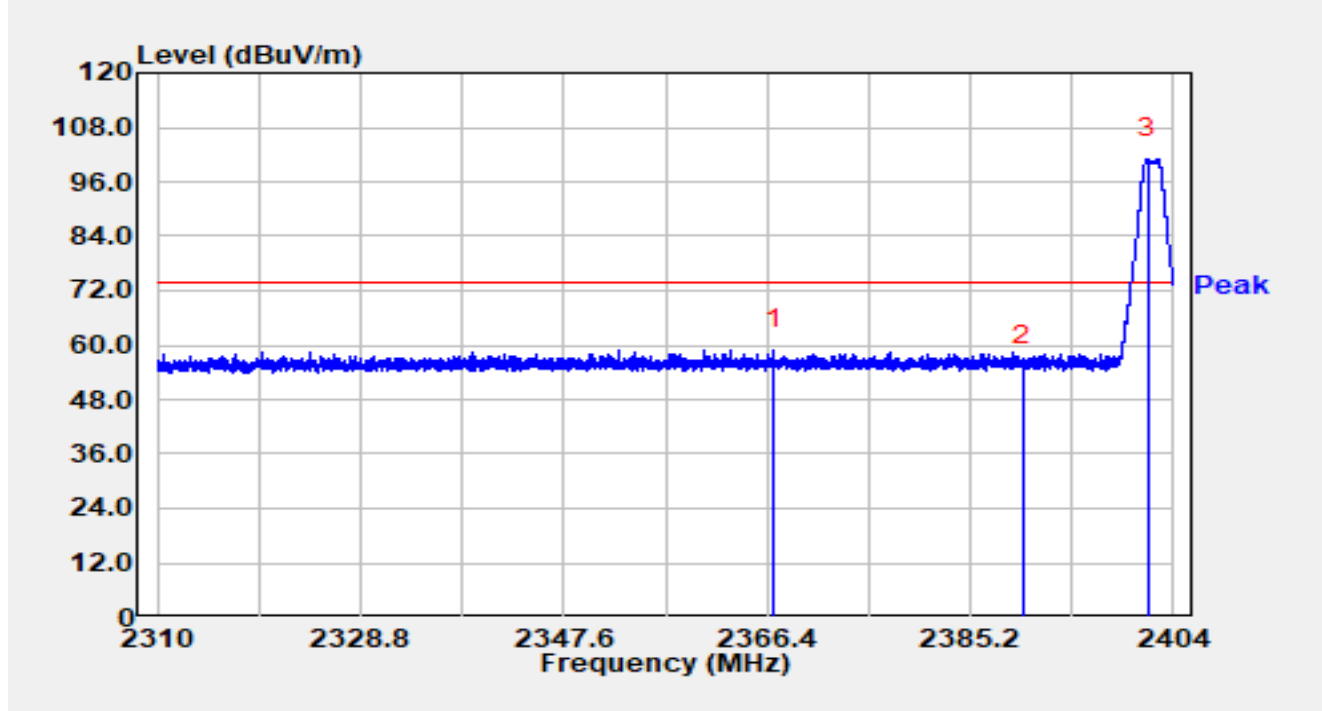


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2366.992        | 29.41          | 29.56      | 58.97                | -15.03      | 74.00          | Peak     |
| 2  |      | 2390.000        | 25.72          | 29.59      | 55.31                | -18.69      | 74.00          | Peak     |
| 3  |      | 2401.584        | 71.35          | 29.64      | 100.99               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_AV    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Horizontal |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 2Mbps at 2402MHz |               |            |

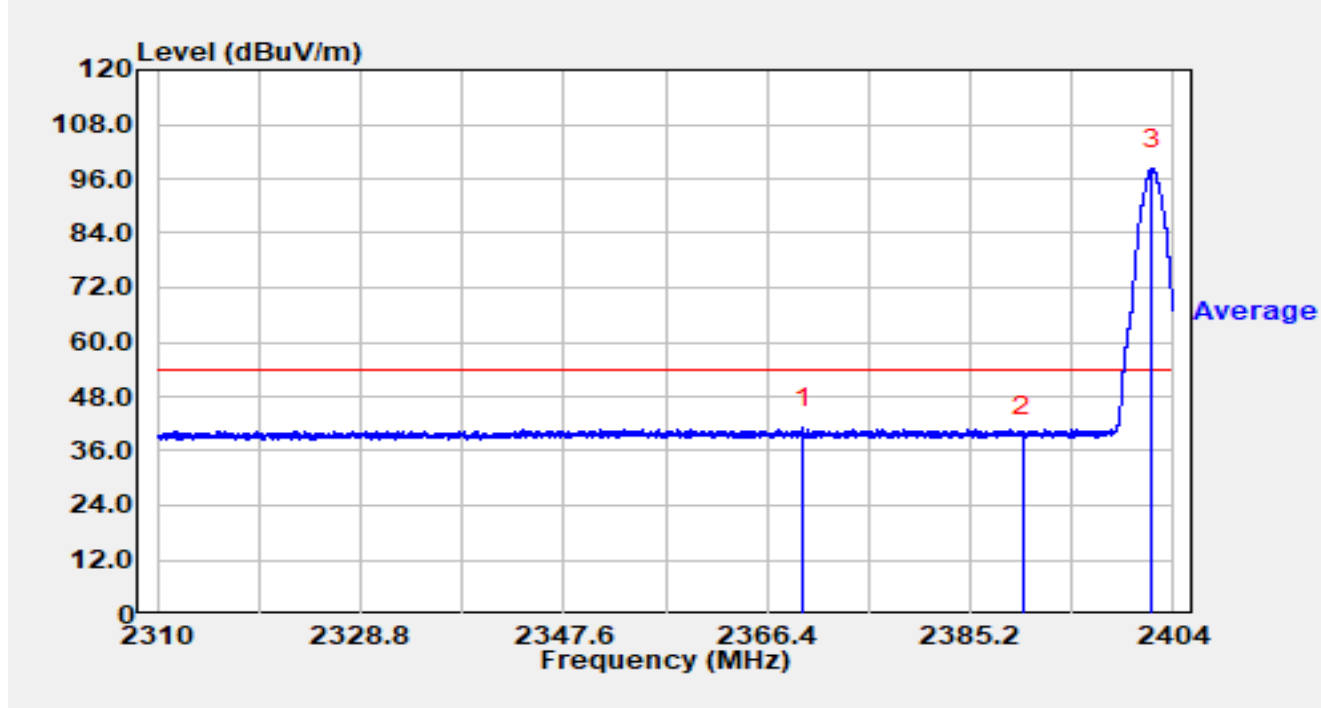


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2369.737        | 11.43          | 29.56      | 40.99                | -13.01      | 54.00          | Average  |
| 2  |      | 2390.000        | 9.75           | 29.59      | 39.34                | -14.66      | 54.00          | Average  |
| 3  |      | 2402.026        | 68.60          | 29.64      | 98.24                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_PK    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Vertical   |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 2Mbps at 2402MHz |               |            |

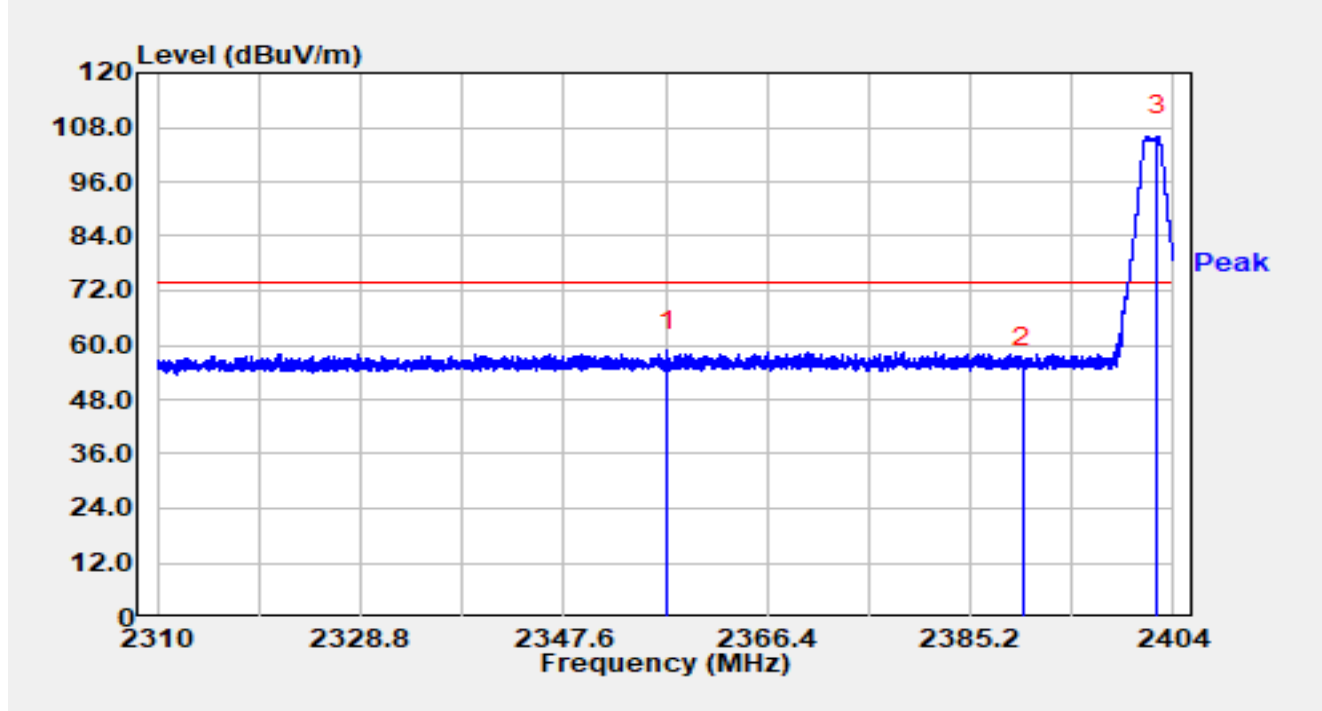


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2357.160        | 29.28          | 29.53      | 58.82                | -15.18      | 74.00          | Peak     |
| 2  |      | 2390.000        | 25.50          | 29.59      | 55.09                | -18.91      | 74.00          | Peak     |
| 3  |      | 2402.524        | 76.49          | 29.64      | 106.13               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_AV    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Vertical   |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 2Mbps at 2402MHz |               |            |

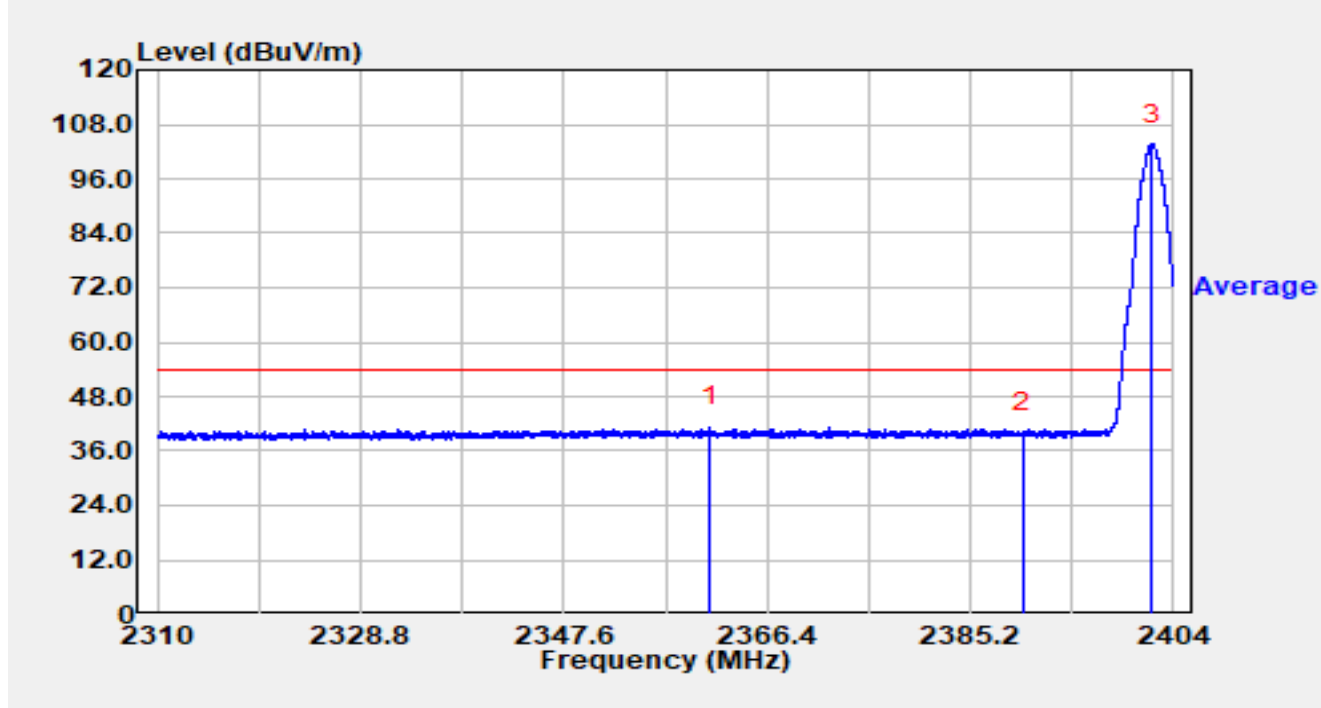


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2361.108        | 11.84          | 29.55      | 41.39                | -12.61      | 54.00          | Average  |
| 2  |      | 2390.000        | 10.50          | 29.59      | 40.09                | -13.91      | 54.00          | Average  |
| 3  |      | 2402.045        | 74.00          | 29.64      | 103.64               | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_PK    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Horizontal |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 2Mbps at 2480MHz |               |            |

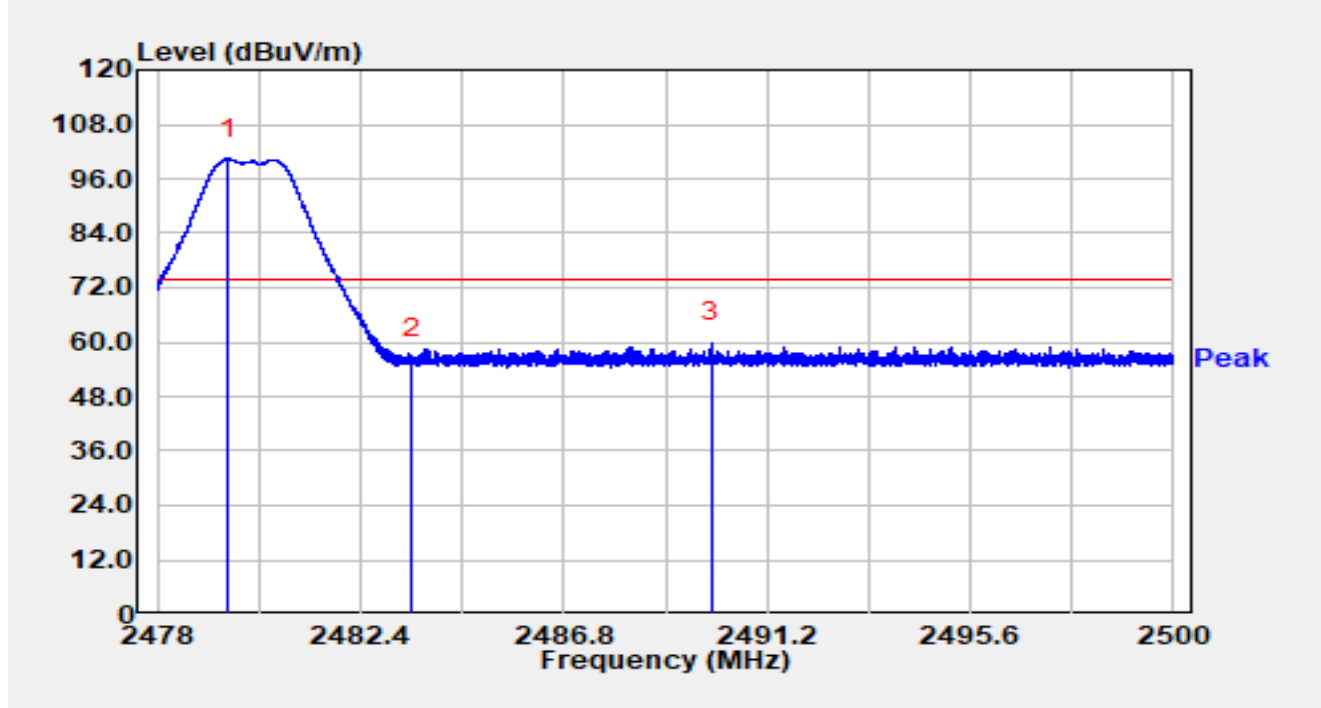


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2479.522        | 70.65          | 29.75      | 100.40               | N/A         | N/A            | Peak     |
| 2  |      | 2483.500        | 26.63          | 29.76      | 56.39                | -17.61      | 74.00          | Peak     |
| 3  | *    | 2489.986        | 30.11          | 29.79      | 59.90                | -14.10      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_AV    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Horizontal |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 2Mbps at 2480MHz |               |            |

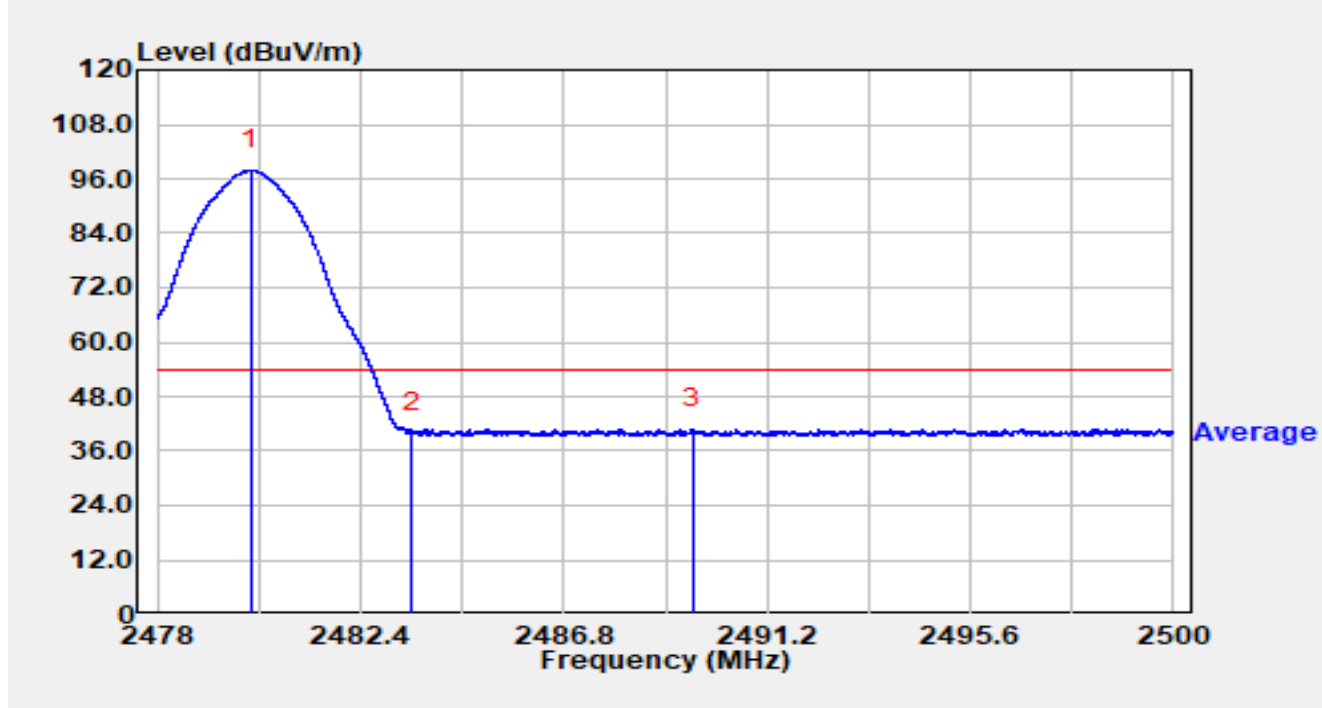


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.035        | 68.13          | 29.75      | 97.88                | N/A         | N/A            | Average  |
| 2  |      | 2483.500        | 10.25          | 29.76      | 40.01                | -13.99      | 54.00          | Average  |
| 3  | *    | 2489.579        | 11.19          | 29.79      | 40.98                | -13.02      | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_PK    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Vertical   |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 2Mbps at 2480MHz |               |            |

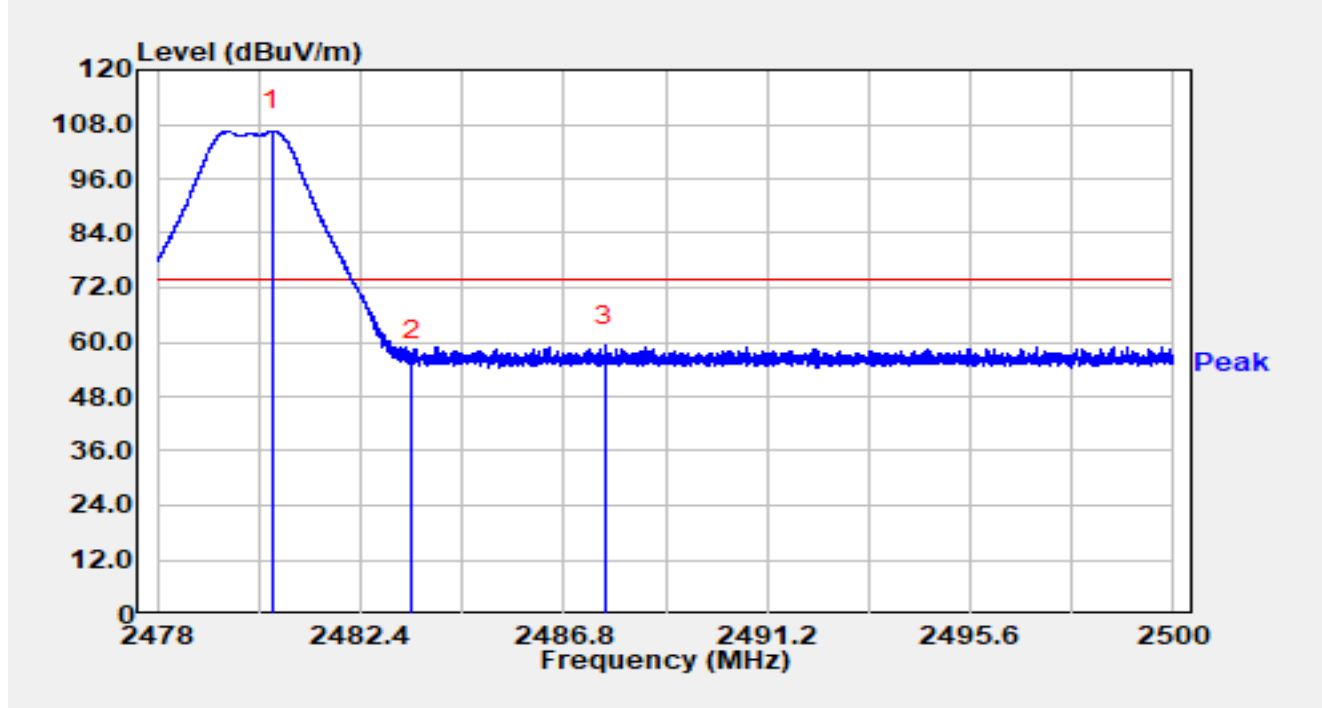


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.495        | 76.67          | 29.75      | 106.43               | N/A         | N/A            | Peak     |
| 2  |      | 2483.500        | 26.35          | 29.76      | 56.11                | -17.89      | 74.00          | Peak     |
| 3  | *    | 2487.693        | 29.50          | 29.78      | 59.28                | -14.72      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_AV    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Vertical   |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 2Mbps at 2480MHz |               |            |

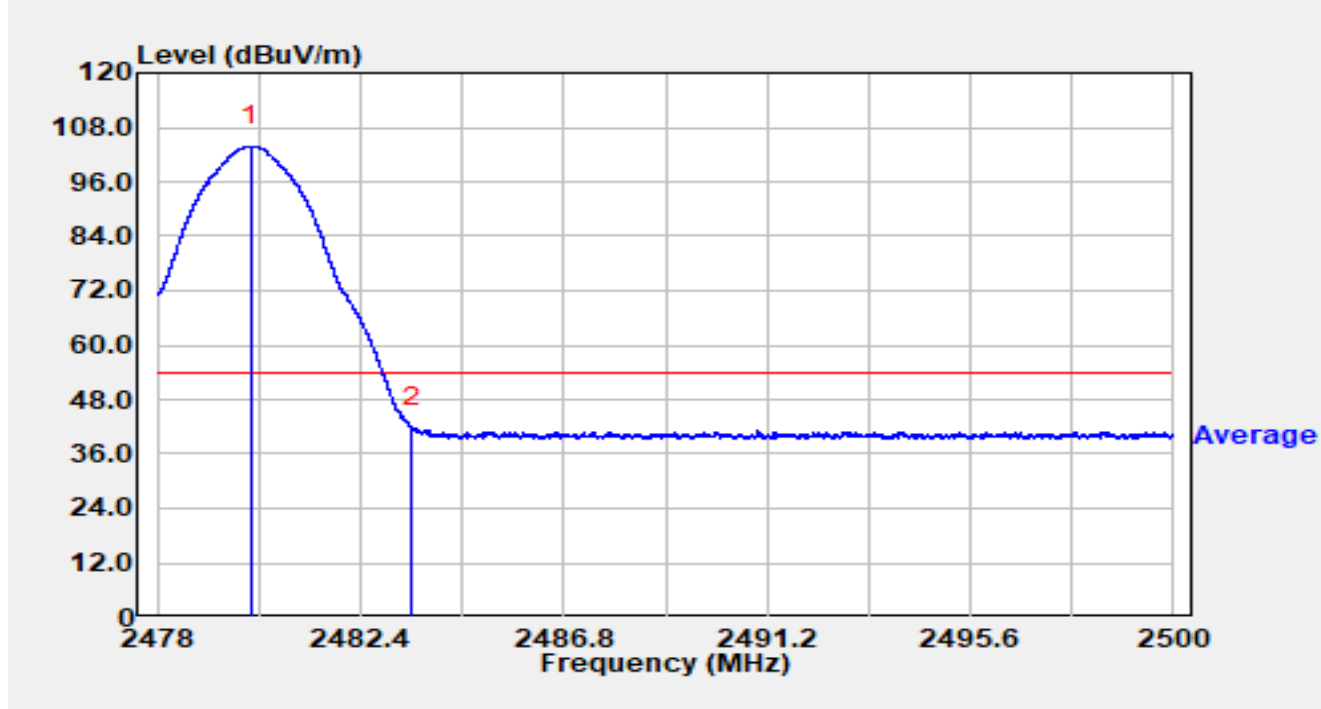


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.035        | 74.16          | 29.75      | 103.91               | N/A         | N/A            | Average  |
| 2  | *    | 2483.500        | 12.15          | 29.76      | 41.91                | -12.09      | 54.00          | Average  |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

### Core 1

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_PK    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Horizontal |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2402MHz |               |            |

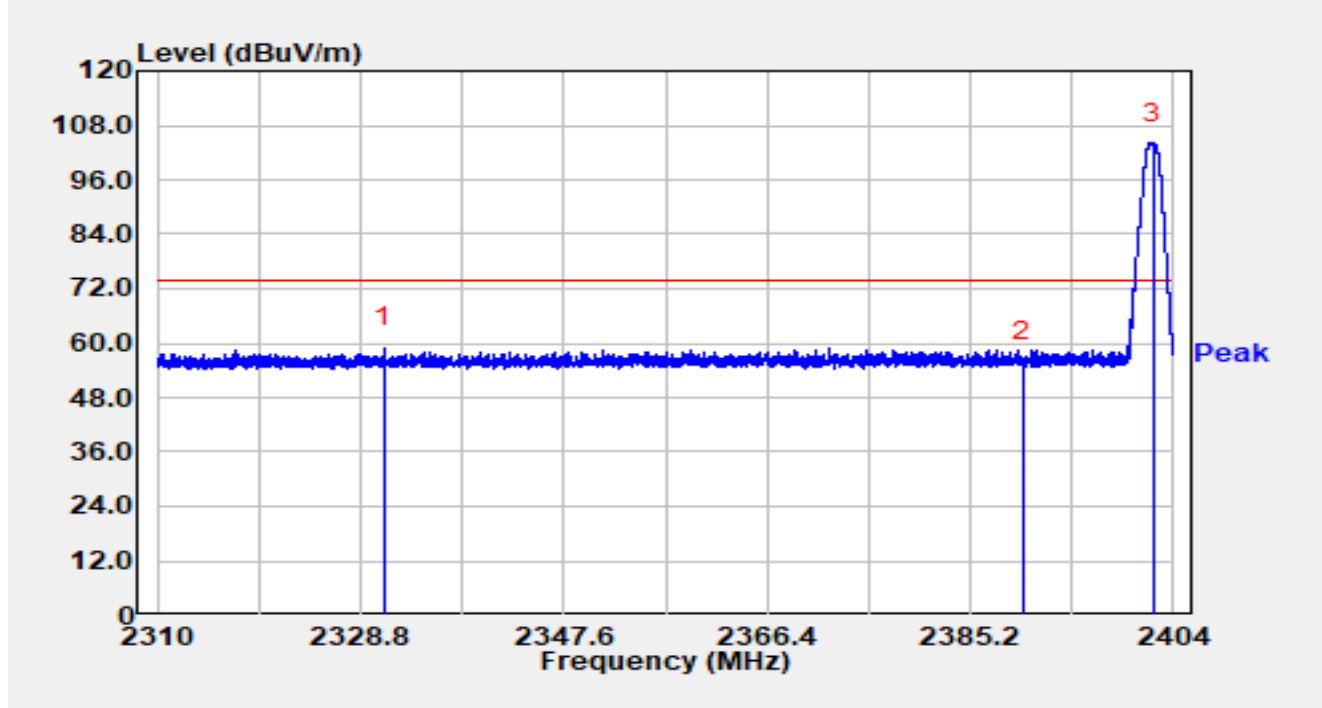


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2330.924        | 29.42          | 29.45      | 58.87                | -15.13      | 74.00          | Peak     |
| 2  |      | 2390.000        | 26.53          | 29.59      | 56.13                | -17.87      | 74.00          | Peak     |
| 3  |      | 2402.111        | 74.43          | 29.64      | 104.07               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_AV    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Horizontal |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2402MHz |               |            |

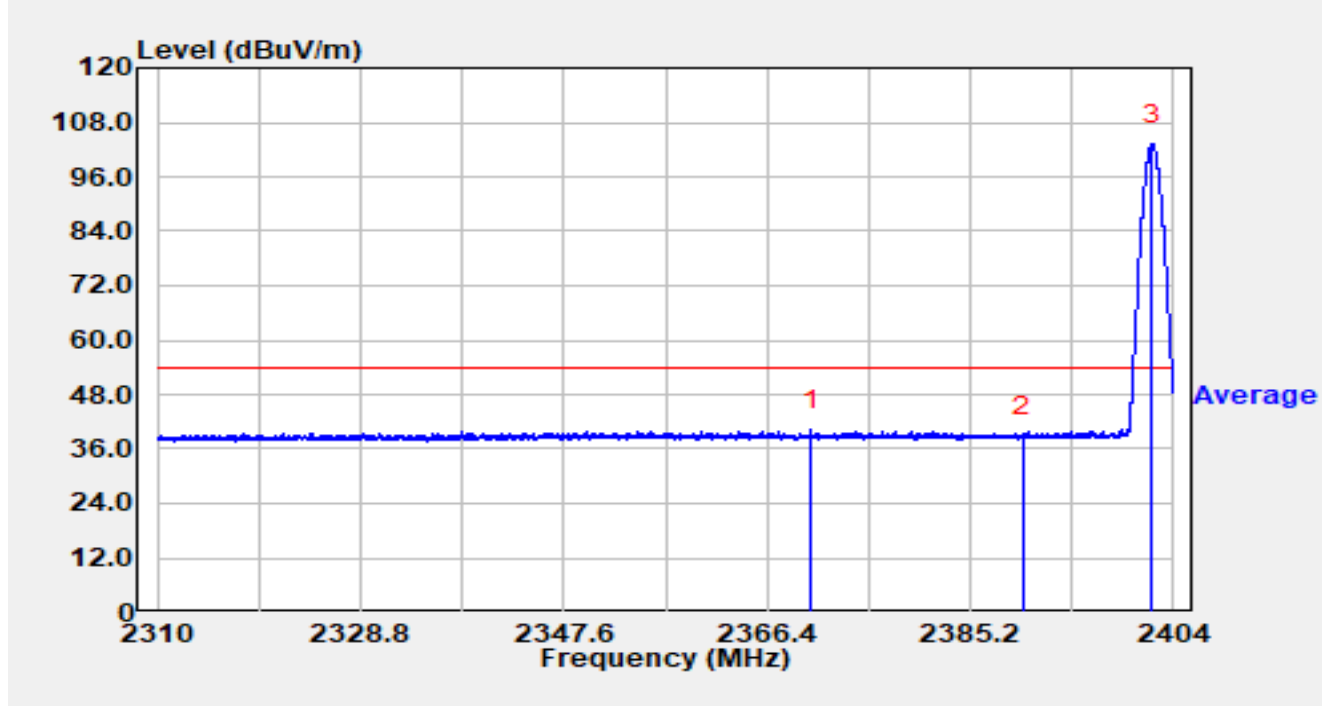


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2370.442        | 10.72          | 29.56      | 40.28                | -13.72      | 54.00          | Average  |
| 2  |      | 2390.000        | 9.02           | 29.59      | 38.62                | -15.38      | 54.00          | Average  |
| 3  |      | 2402.026        | 73.45          | 29.64      | 103.09               | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_PK    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Vertical   |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2402MHz |               |            |

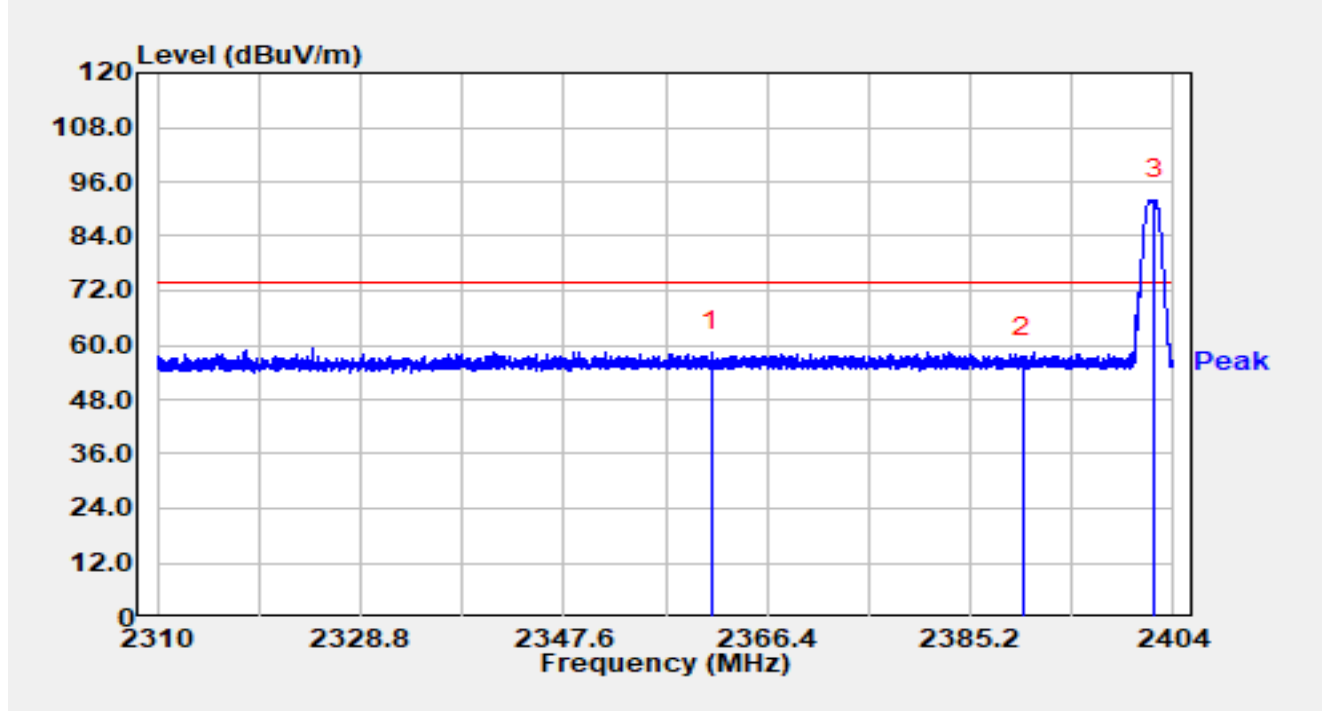


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2361.258        | 29.07          | 29.55      | 58.62                | -15.38      | 74.00          | Peak     |
| 2  |      | 2390.000        | 27.73          | 29.59      | 57.32                | -16.68      | 74.00          | Peak     |
| 3  |      | 2402.280        | 62.31          | 29.64      | 91.95                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_AV    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Vertical   |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2402MHz |               |            |

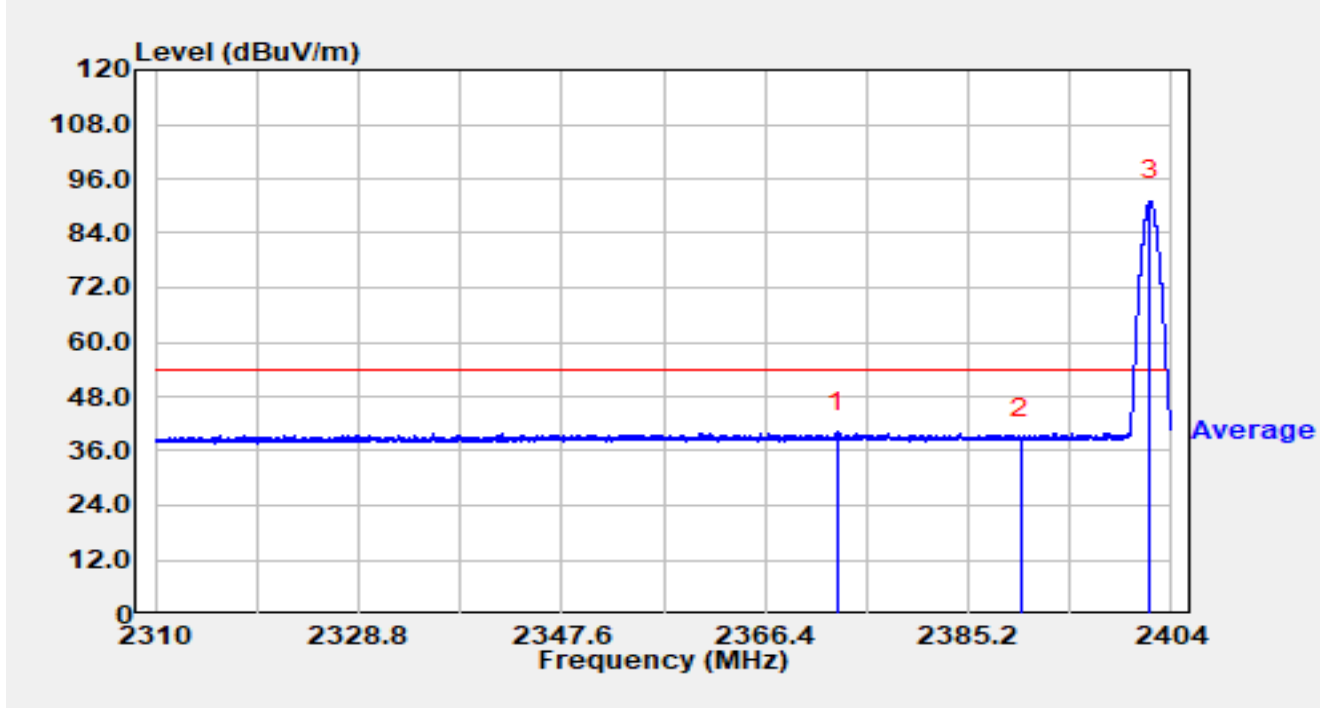


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2373.008        | 10.59          | 29.56      | 40.16                | -13.84      | 54.00          | Average  |
| 2  |      | 2390.000        | 8.92           | 29.59      | 38.52                | -15.48      | 54.00          | Average  |
| 3  |      | 2402.045        | 61.39          | 29.64      | 91.03                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_PK    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Horizontal |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2480MHz |               |            |

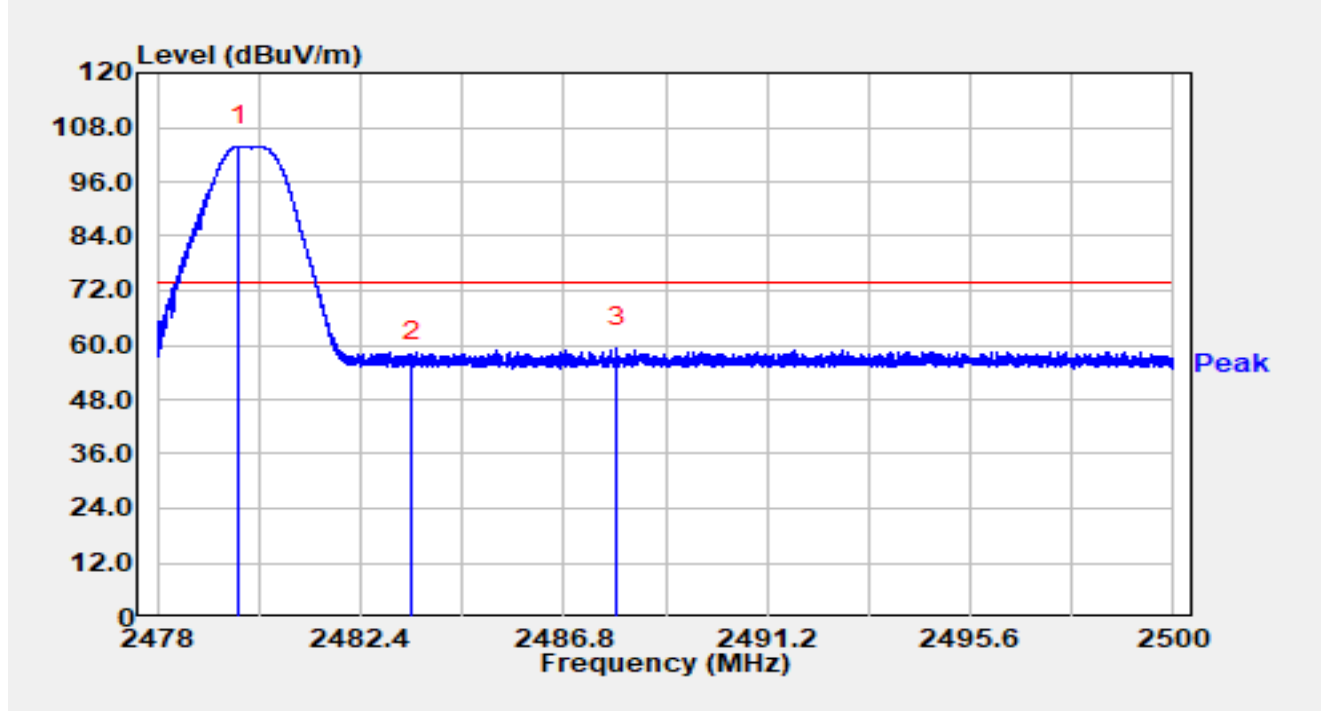


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2479.769        | 74.08          | 29.75      | 103.84               | N/A         | N/A            | Peak     |
| 2  |      | 2483.500        | 26.68          | 29.76      | 56.44                | -17.56      | 74.00          | Peak     |
| 3  | *    | 2487.935        | 29.69          | 29.78      | 59.47                | -14.53      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_AV    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Horizontal |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2480MHz |               |            |

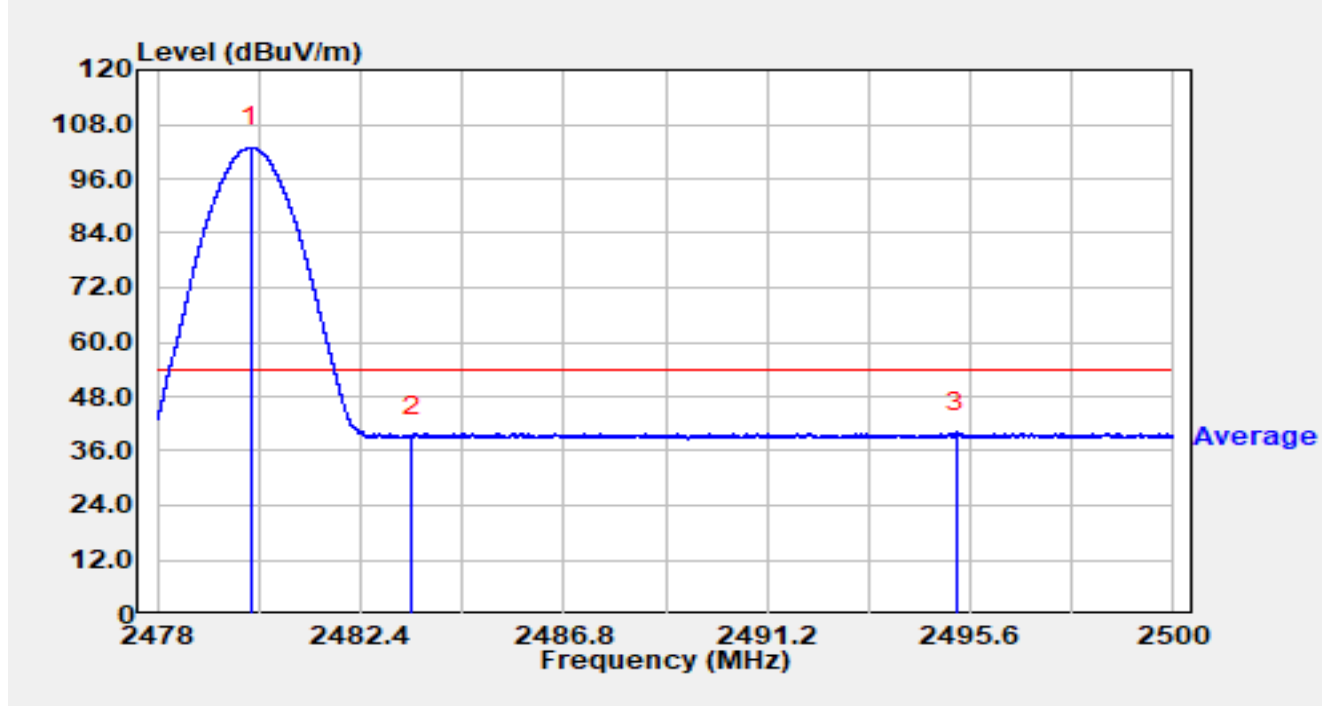


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.031        | 73.16          | 29.75      | 102.91               | N/A         | N/A            | Average  |
| 2  |      | 2483.500        | 9.32           | 29.76      | 39.08                | -14.92      | 54.00          | Average  |
| 3  | *    | 2495.299        | 10.37          | 29.79      | 40.16                | -13.84      | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_PK    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Vertical   |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2480MHz |               |            |

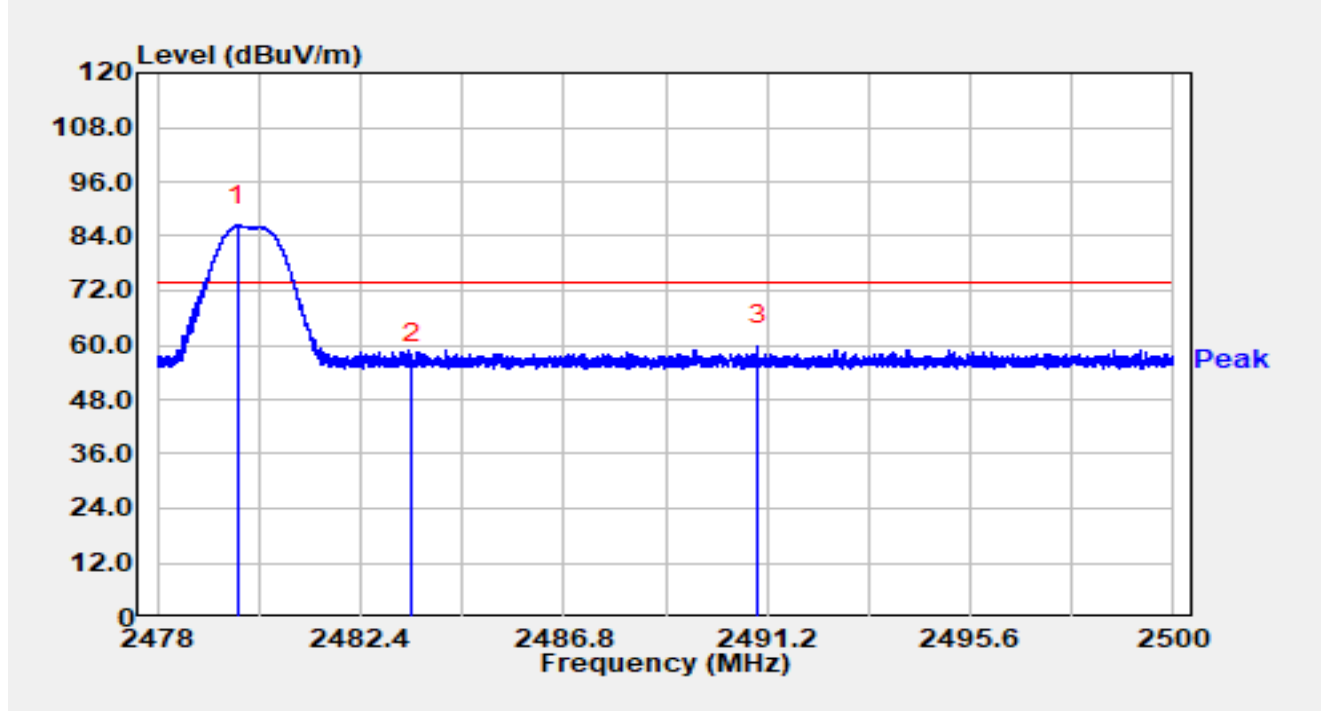


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2479.749        | 56.65          | 29.75      | 86.40                | N/A         | N/A            | Peak     |
| 2  |      | 2483.500        | 26.23          | 29.76      | 55.99                | -18.01      | 74.00          | Peak     |
| 3  | *    | 2490.995        | 30.11          | 29.79      | 59.90                | -14.10      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_AV    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Vertical   |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at 2480MHz |               |            |

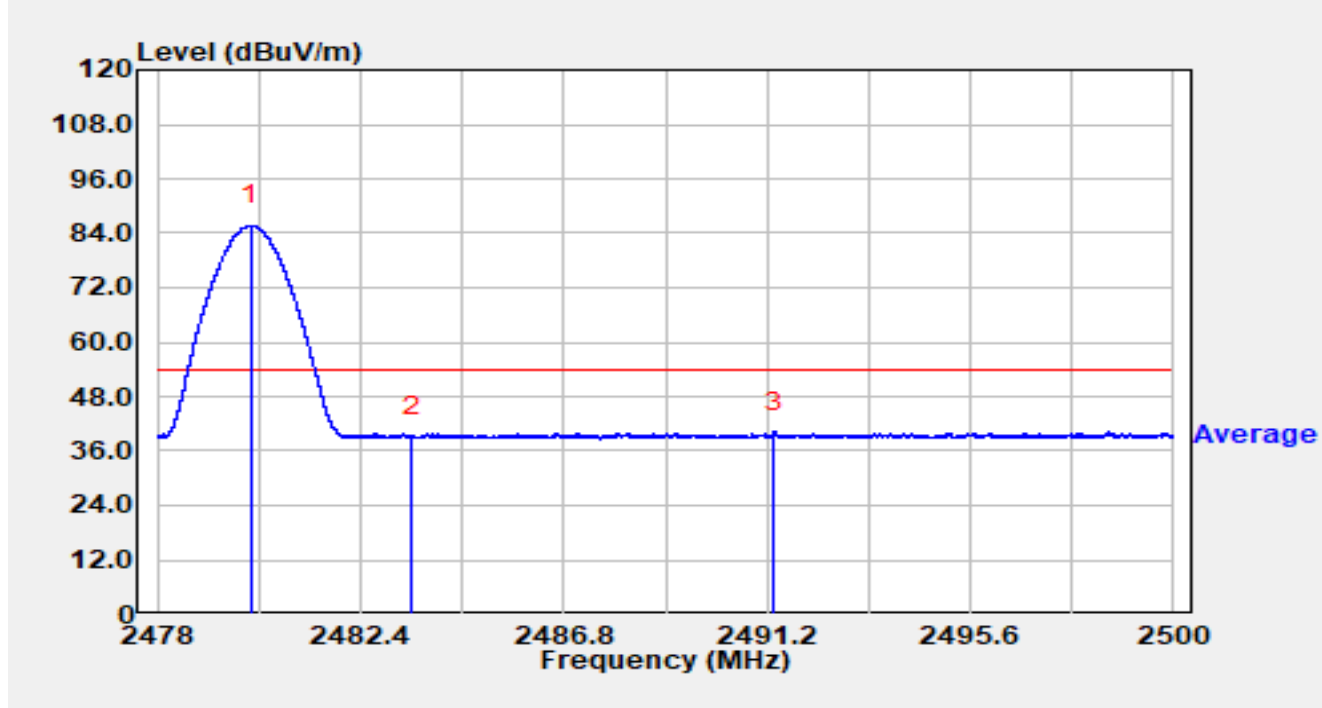


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.024        | 55.84          | 29.75      | 85.60                | N/A         | N/A            | Average  |
| 2  |      | 2483.500        | 9.54           | 29.76      | 39.30                | -14.70      | 54.00          | Average  |
| 3  | *    | 2491.361        | 10.44          | 29.79      | 40.23                | -13.77      | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_PK    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Horizontal |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 2Mbps at 2402MHz |               |            |

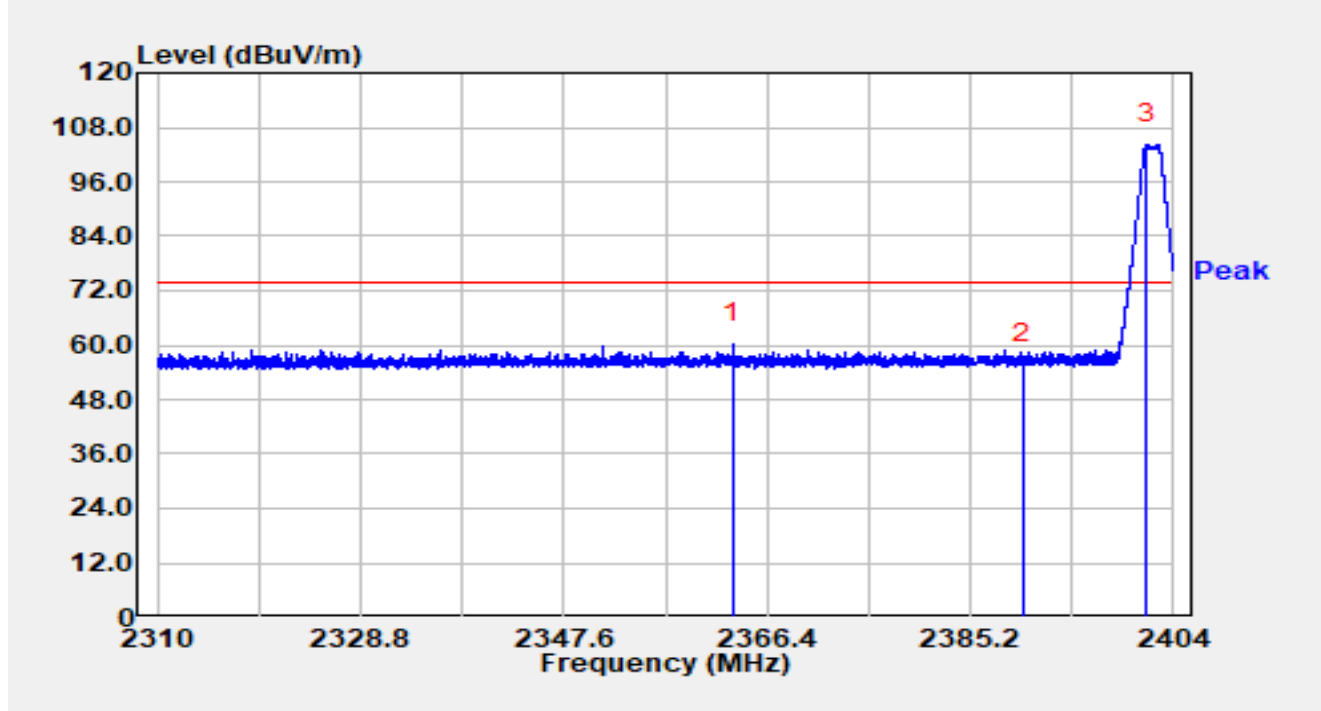


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2363.195        | 30.71          | 29.55      | 60.26                | -13.74      | 74.00          | Peak     |
| 2  |      | 2390.000        | 26.32          | 29.59      | 55.91                | -18.09      | 74.00          | Peak     |
| 3  |      | 2401.528        | 74.62          | 29.64      | 104.26               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_AV    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Horizontal |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 2Mbps at 2402MHz |               |            |

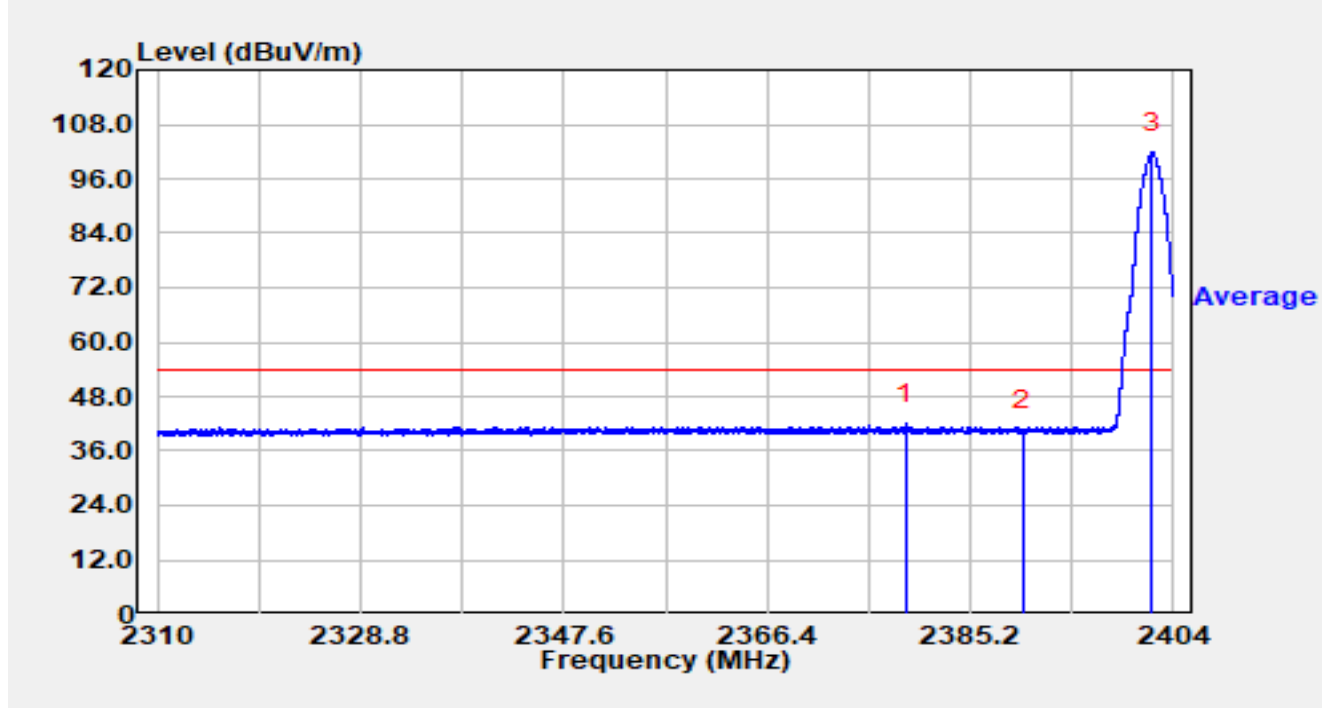


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2379.184        | 12.35          | 29.57      | 41.92                | -12.08      | 54.00          | Average  |
| 2  |      | 2390.000        | 11.00          | 29.59      | 40.59                | -13.41      | 54.00          | Average  |
| 3  |      | 2402.026        | 72.19          | 29.64      | 101.82               | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_PK    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Vertical   |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 2Mbps at 2402MHz |               |            |

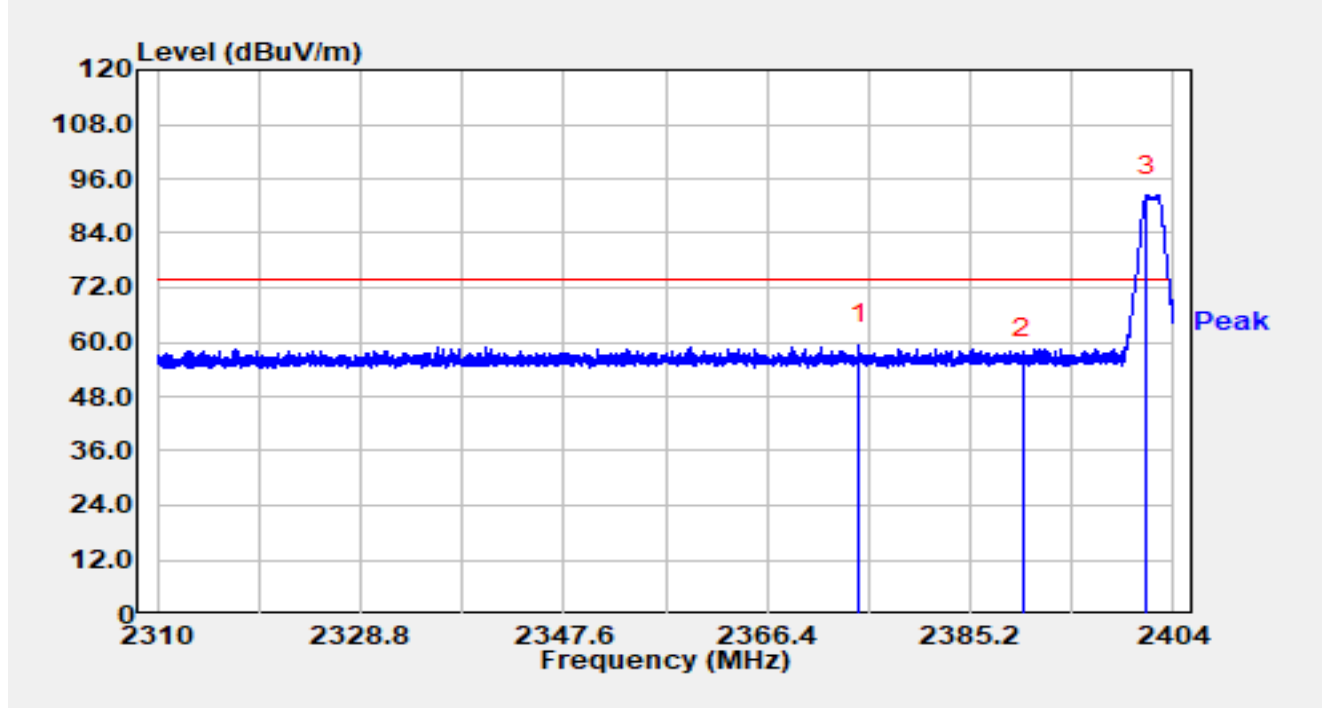


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2374.888        | 29.84          | 29.56      | 59.41                | -14.59      | 74.00          | Peak     |
| 2  |      | 2390.000        | 26.84          | 29.59      | 56.43                | -17.57      | 74.00          | Peak     |
| 3  |      | 2401.518        | 62.73          | 29.64      | 92.37                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_AV    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Vertical   |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 2Mbps at 2402MHz |               |            |

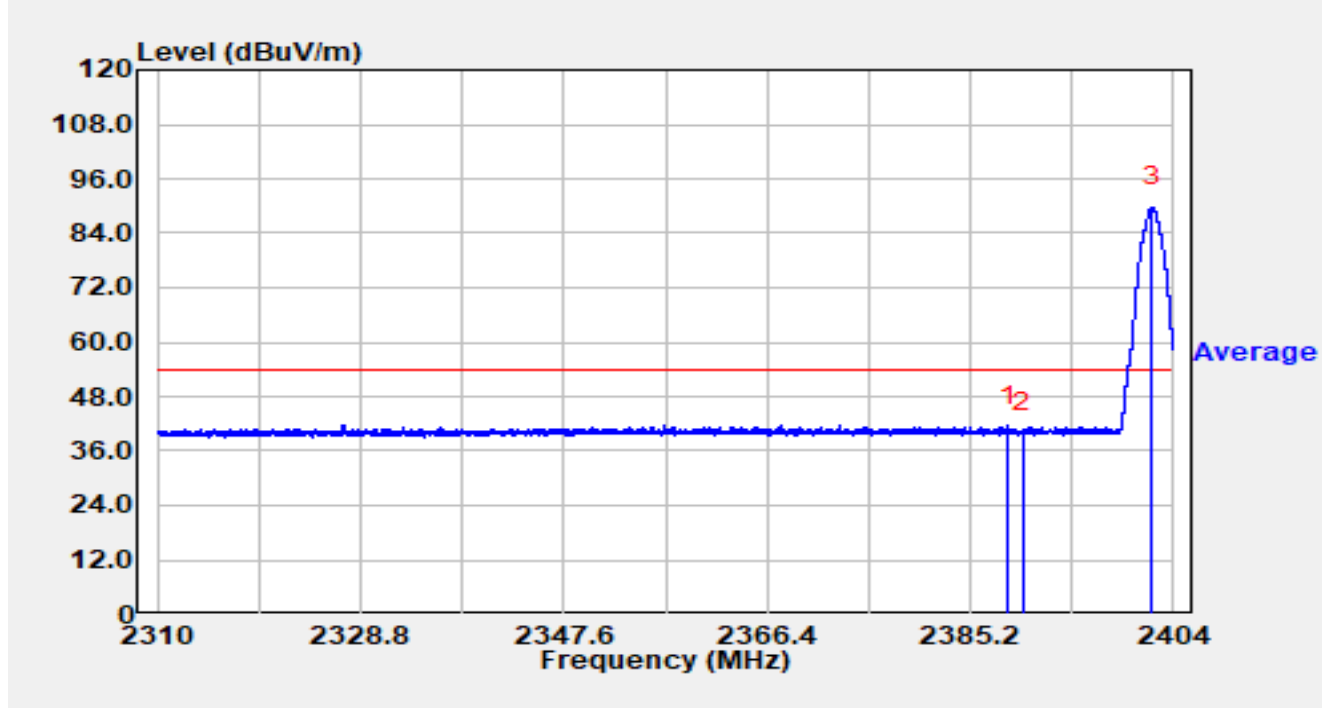


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2388.659        | 12.03          | 29.59      | 41.62                | -12.38      | 54.00          | Average  |
| 2  |      | 2390.000        | 10.63          | 29.59      | 40.23                | -13.77      | 54.00          | Average  |
| 3  |      | 2402.035        | 60.21          | 29.64      | 89.85                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_PK    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Horizontal |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 2Mbps at 2480MHz |               |            |

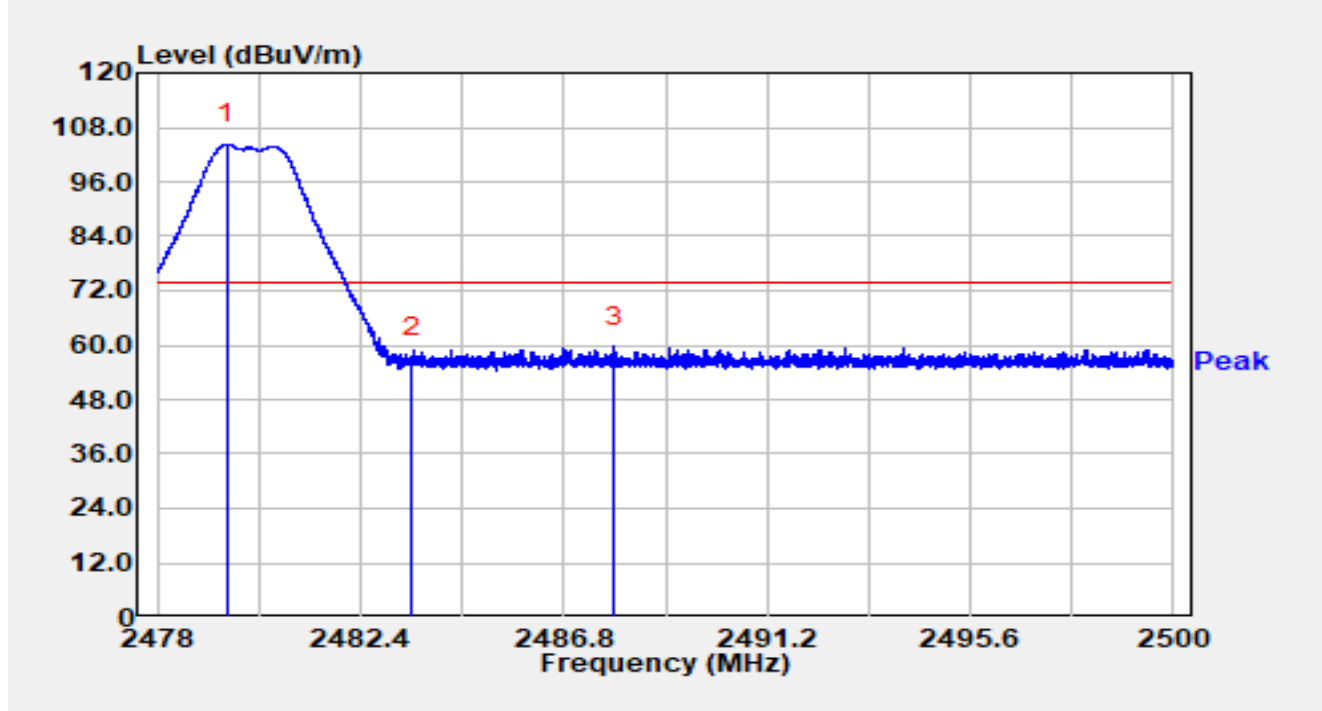


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2479.511        | 74.47          | 29.75      | 104.22               | N/A         | N/A            | Peak     |
| 2  |      | 2483.500        | 27.35          | 29.76      | 57.12                | -16.88      | 74.00          | Peak     |
| 3  | *    | 2487.896        | 29.84          | 29.78      | 59.62                | -14.38      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_AV    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Horizontal |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 2Mbps at 2480MHz |               |            |

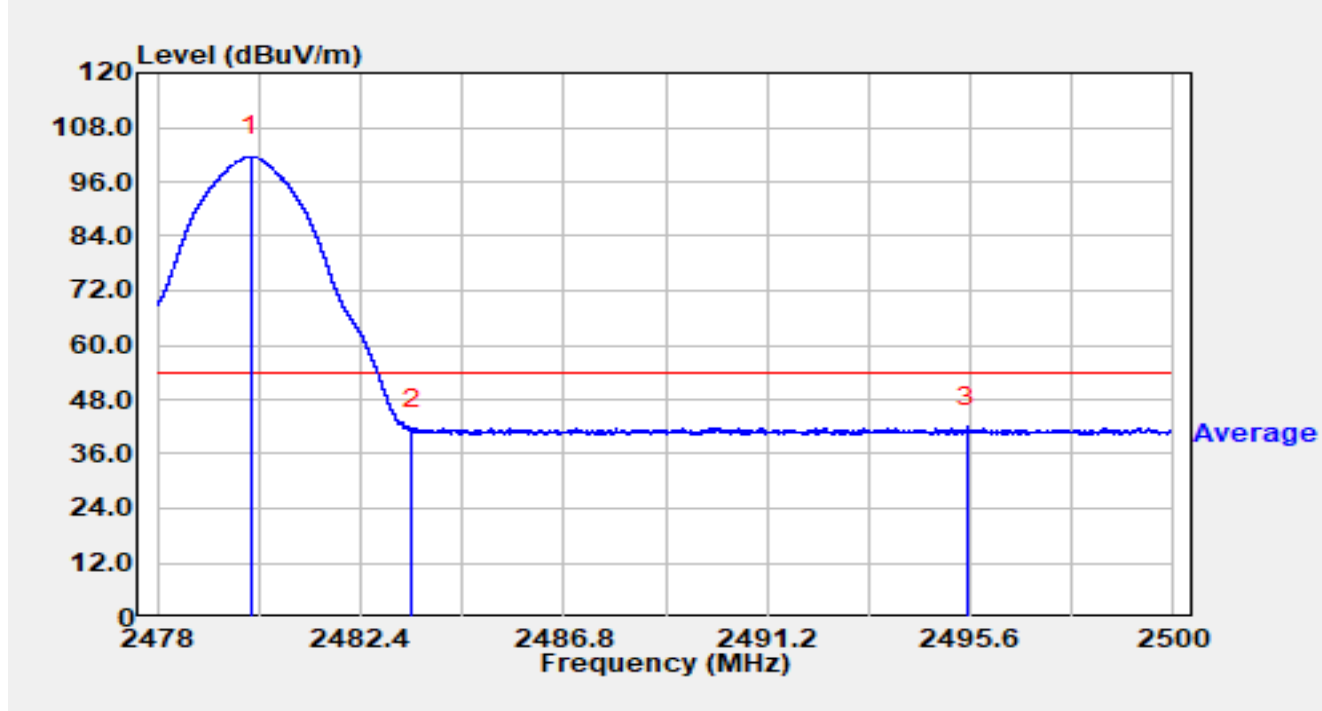


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.037        | 71.76          | 29.75      | 101.52               | N/A         | N/A            | Average  |
| 2  |      | 2483.500        | 11.77          | 29.76      | 41.53                | -12.47      | 54.00          | Average  |
| 3  | *    | 2495.538        | 12.31          | 29.79      | 42.10                | -11.90      | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_PK    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Vertical   |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 2Mbps at 2480MHz |               |            |

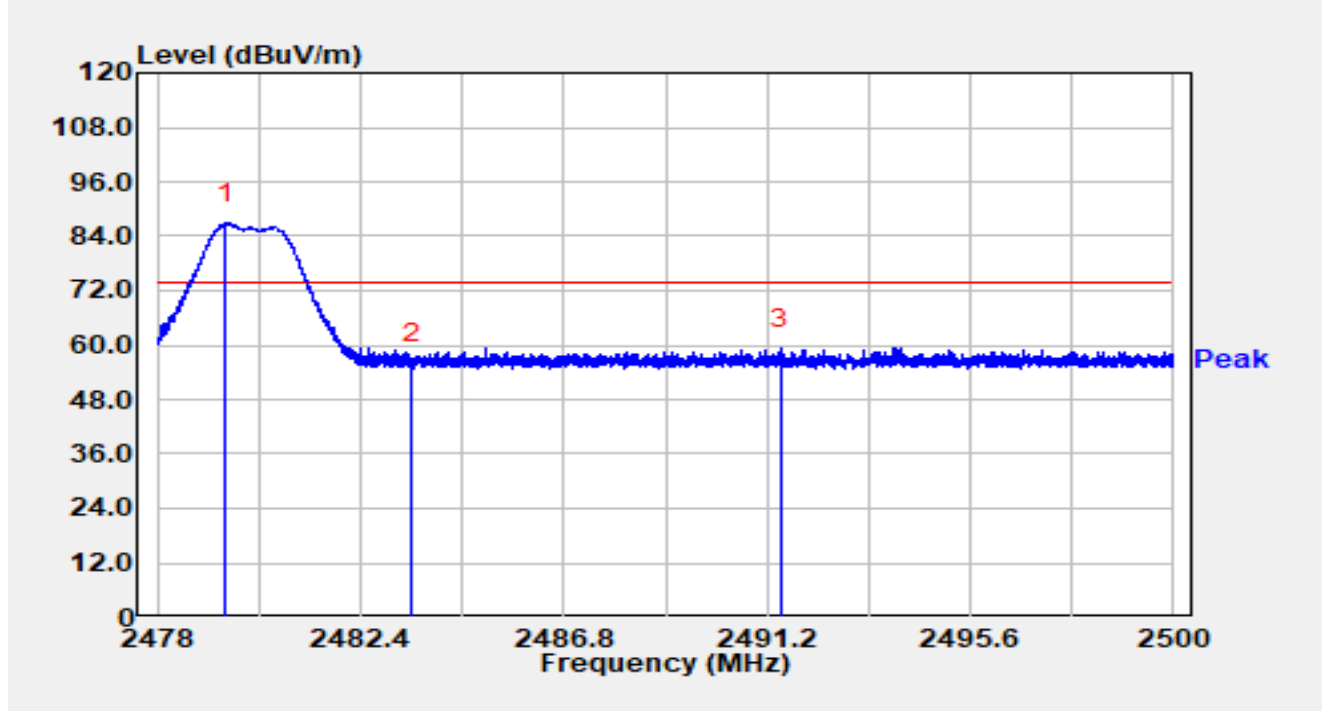


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2479.483        | 57.12          | 29.75      | 86.87                | N/A         | N/A            | Peak     |
| 2  |      | 2483.500        | 26.17          | 29.76      | 55.93                | -18.07      | 74.00          | Peak     |
| 3  | *    | 2491.497        | 29.52          | 29.79      | 59.31                | -14.69      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                  |               |            |
|-------------|----------------------------------|---------------|------------|
| Site        | WJ-AC2                           | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                          | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge (3m)_AV    | Test Engineer | Carl Jiang |
| Factor      | DRH18-E_07105                    | Polarity      | Vertical   |
| EUT         | ACCESS POINT                     | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 2Mbps at 2480MHz |               |            |

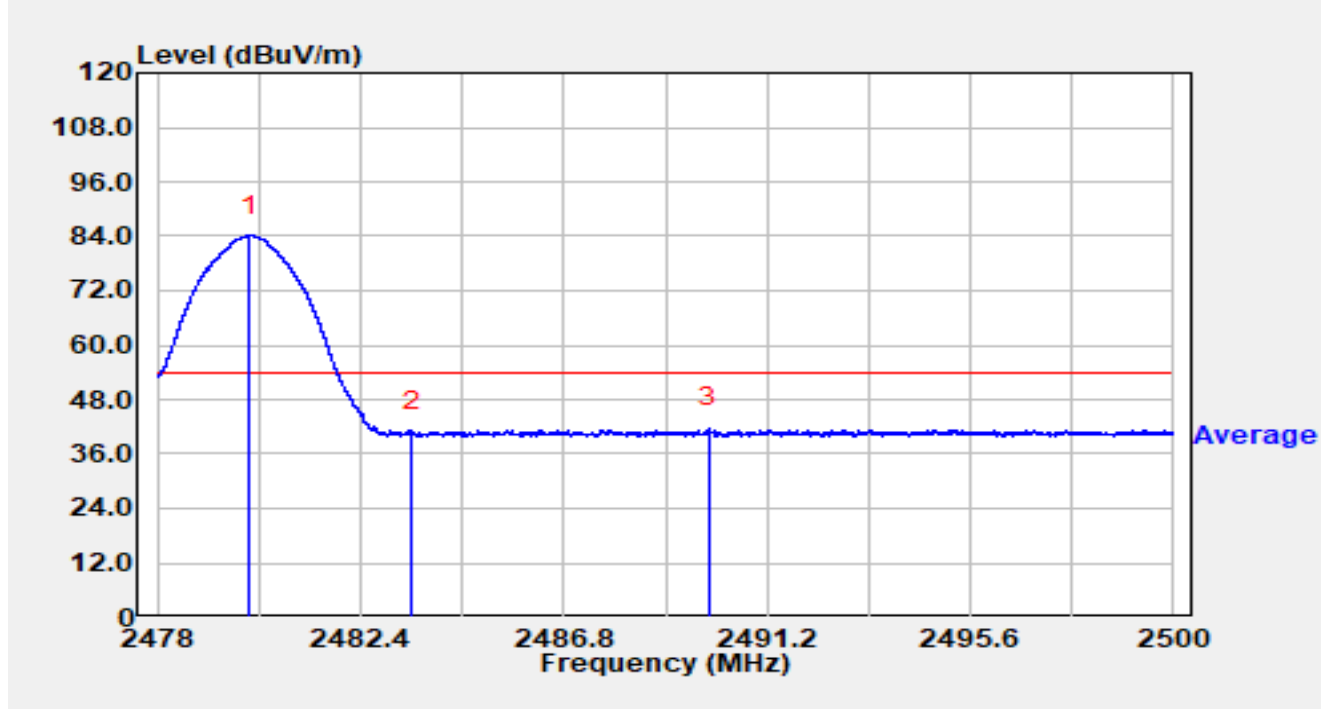


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.004        | 54.40          | 29.75      | 84.15                | N/A         | N/A            | Average  |
| 2  |      | 2483.500        | 11.18          | 29.76      | 40.94                | -13.06      | 54.00          | Average  |
| 3  | *    | 2489.944        | 11.92          | 29.79      | 41.70                | -12.30      | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

### Core 0 and Core 1 simultaneous transmission (Same Power Setting)

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2470MHz |               |            |

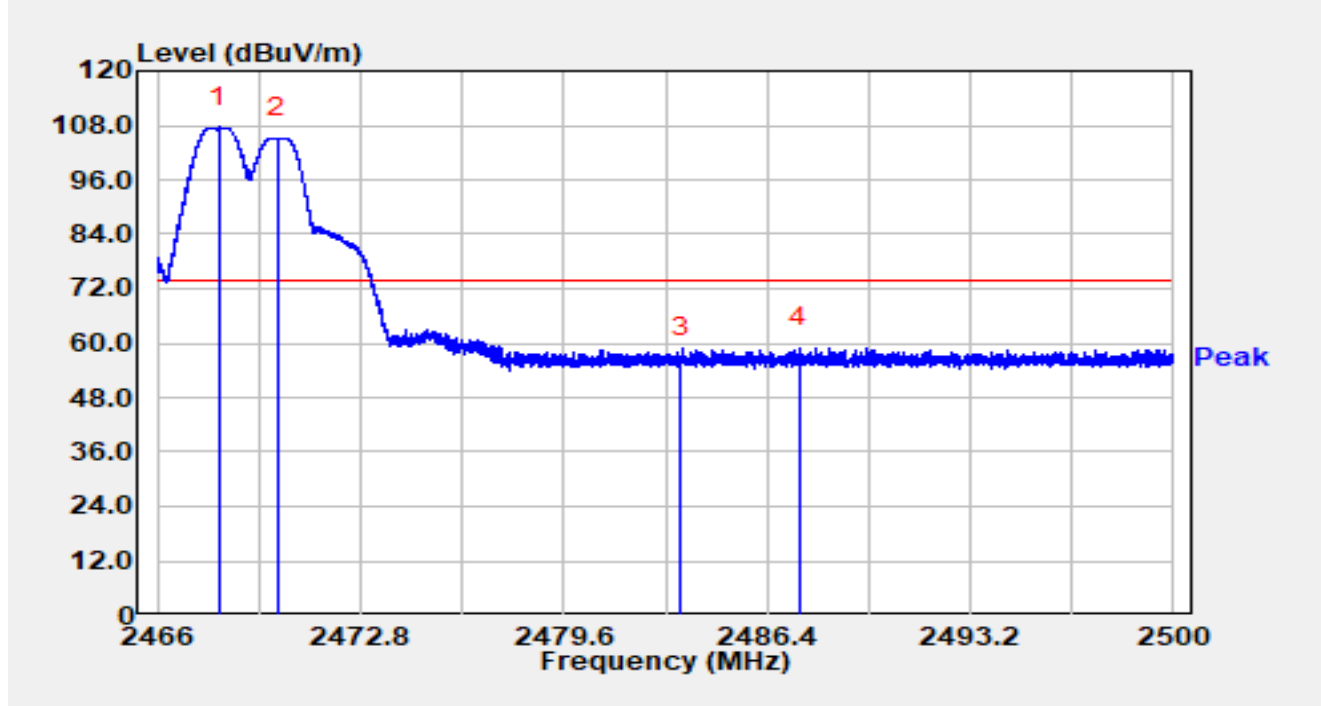


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.067        | 77.92          | 29.72      | 107.65               | N/A         | N/A            | Peak     |
| 2  |      | 2470.009        | 75.53          | 29.72      | 105.26               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 27.14          | 29.76      | 56.91                | -17.09      | 74.00          | Peak     |
| 4  | *    | 2487.478        | 29.15          | 29.78      | 58.93                | -15.07      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2470MHz |               |            |

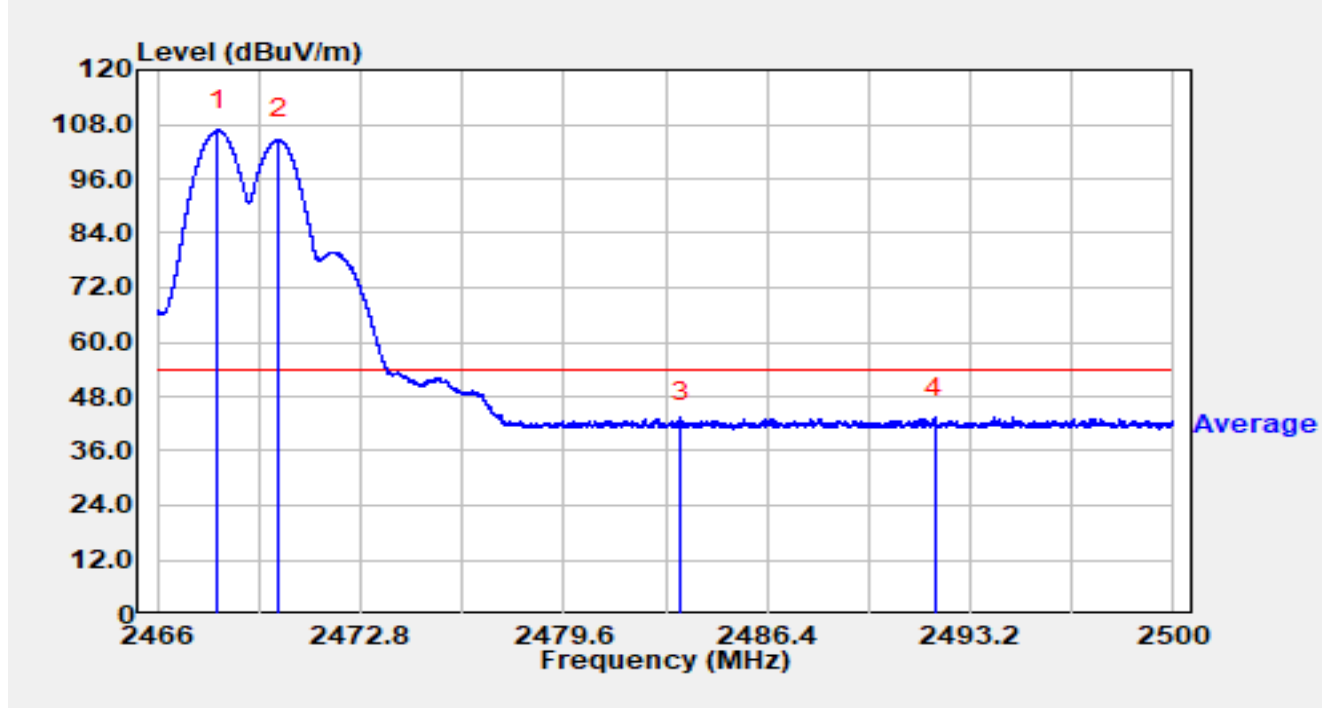


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.030        | 76.93          | 29.72      | 106.65               | N/A         | N/A            | Average  |
| 2  |      | 2470.056        | 74.90          | 29.72      | 104.63               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.63          | 29.76      | 42.40                | -11.60      | 54.00          | Average  |
| 4  | *    | 2492.007        | 13.66          | 29.79      | 43.45                | -10.55      | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2470MHz |               |            |

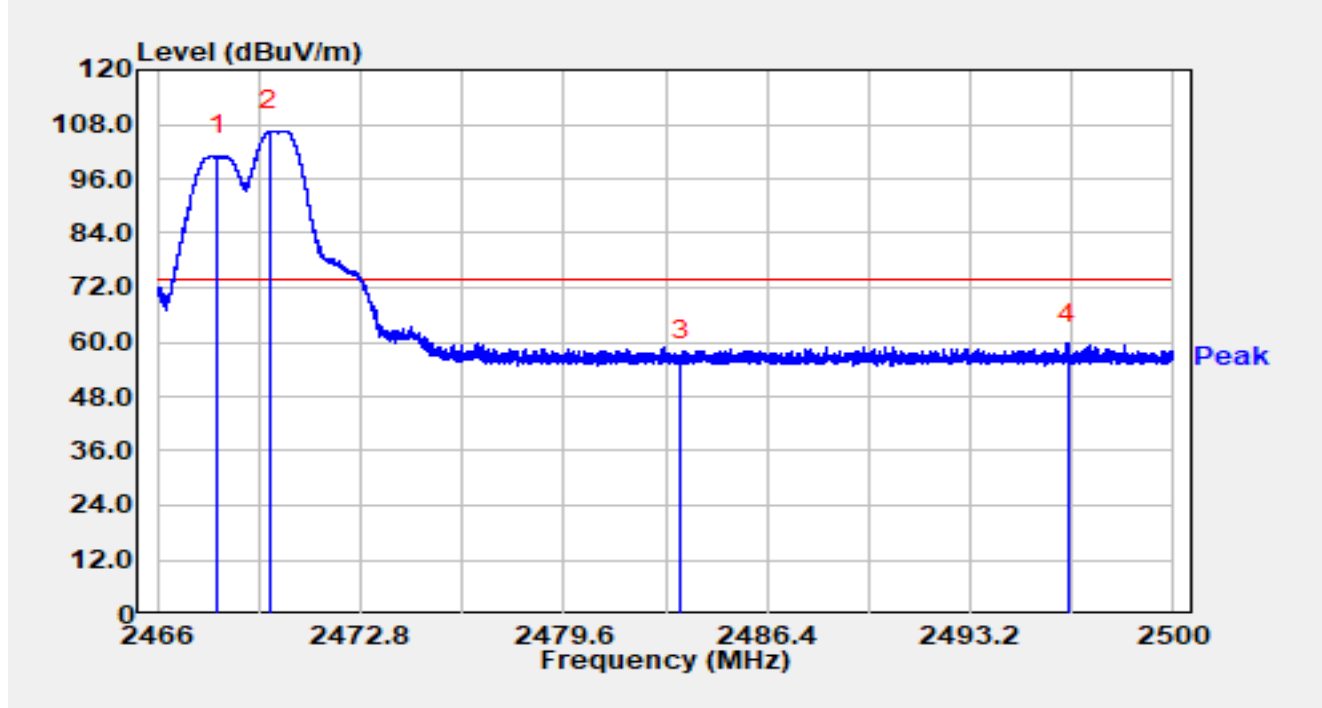


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.006        | 71.37          | 29.72      | 101.09               | N/A         | N/A            | Peak     |
| 2  |      | 2469.760        | 76.76          | 29.72      | 106.48               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 26.03          | 29.76      | 55.79                | -18.21      | 74.00          | Peak     |
| 4  | *    | 2496.450        | 29.93          | 29.79      | 59.72                | -14.28      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2470MHz |               |            |

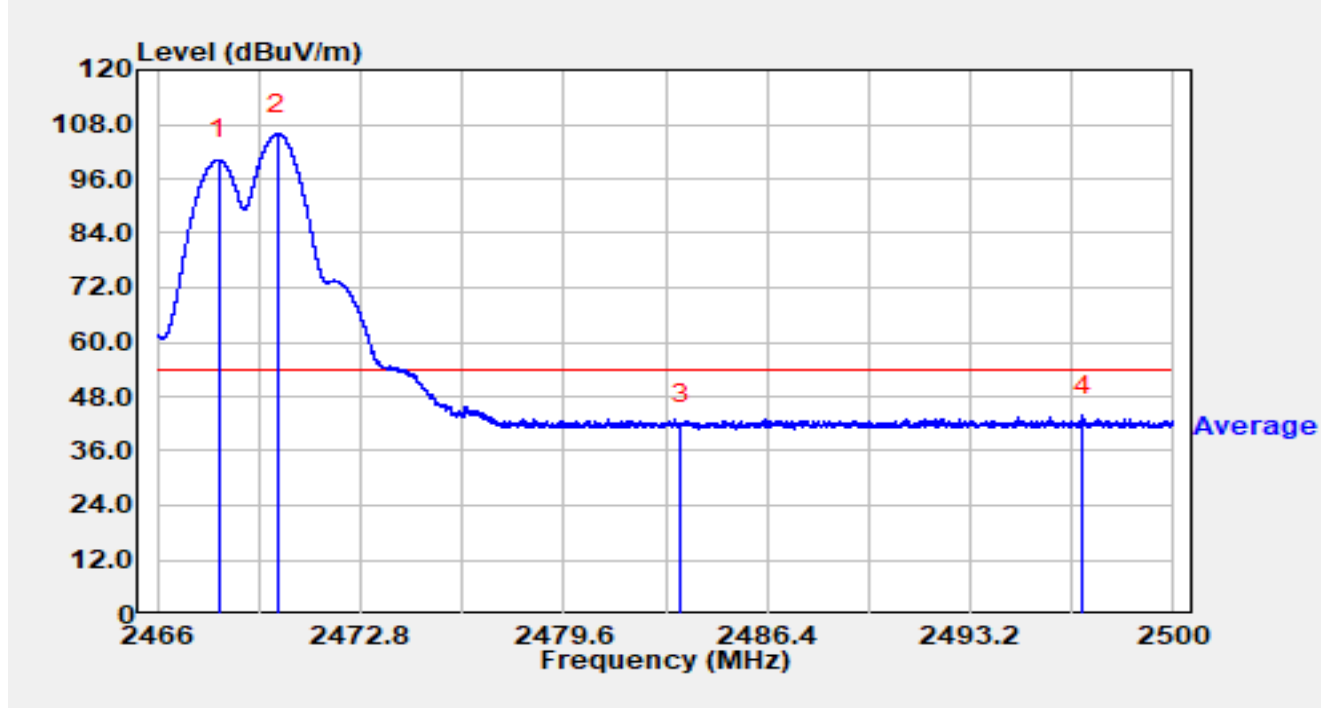


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.047        | 70.37          | 29.72      | 100.09               | N/A         | N/A            | Average  |
| 2  |      | 2470.039        | 76.12          | 29.72      | 105.85               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.08          | 29.76      | 41.84                | -12.16      | 54.00          | Average  |
| 4  | *    | 2496.957        | 13.91          | 29.79      | 43.70                | -10.30      | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2472MHz |               |            |

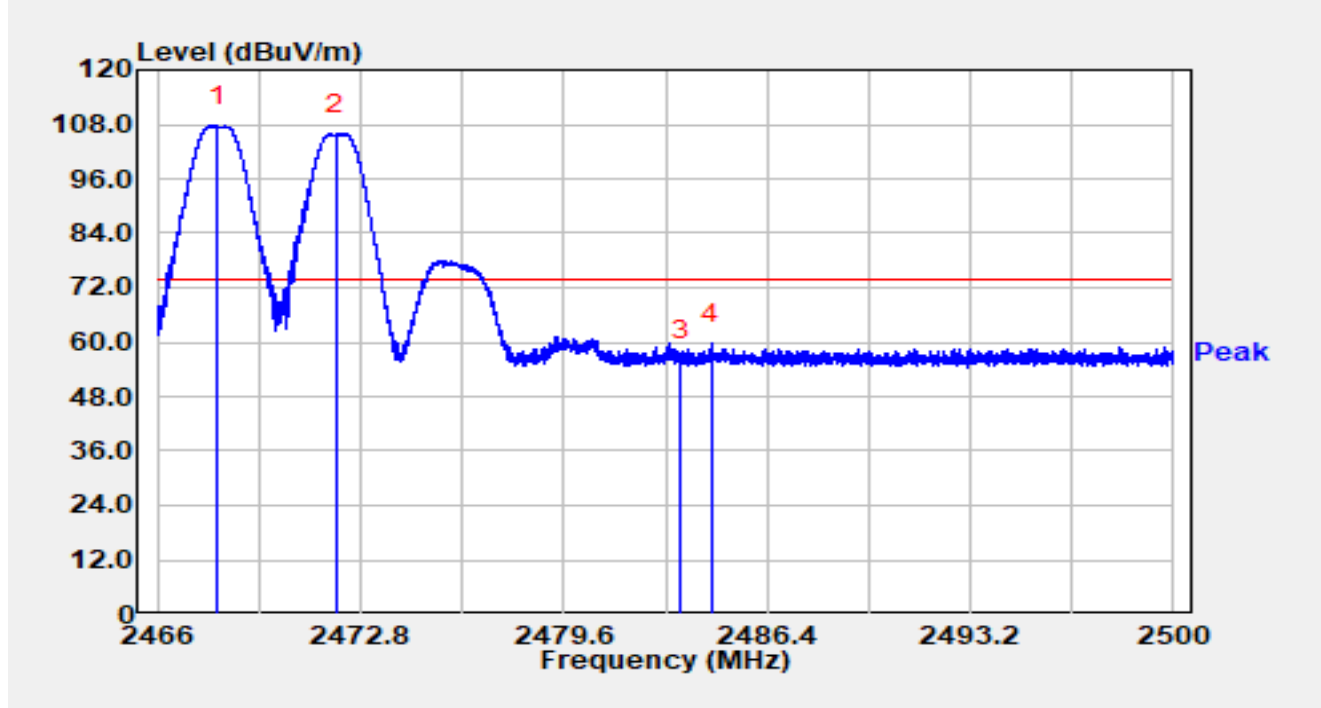


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.010        | 78.05          | 29.72      | 107.77               | N/A         | N/A            | Peak     |
| 2  |      | 2471.974        | 76.07          | 29.73      | 105.80               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 26.07          | 29.76      | 55.84                | -18.16      | 74.00          | Peak     |
| 4  | *    | 2484.523        | 29.90          | 29.77      | 59.67                | -14.33      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2472MHz |               |            |

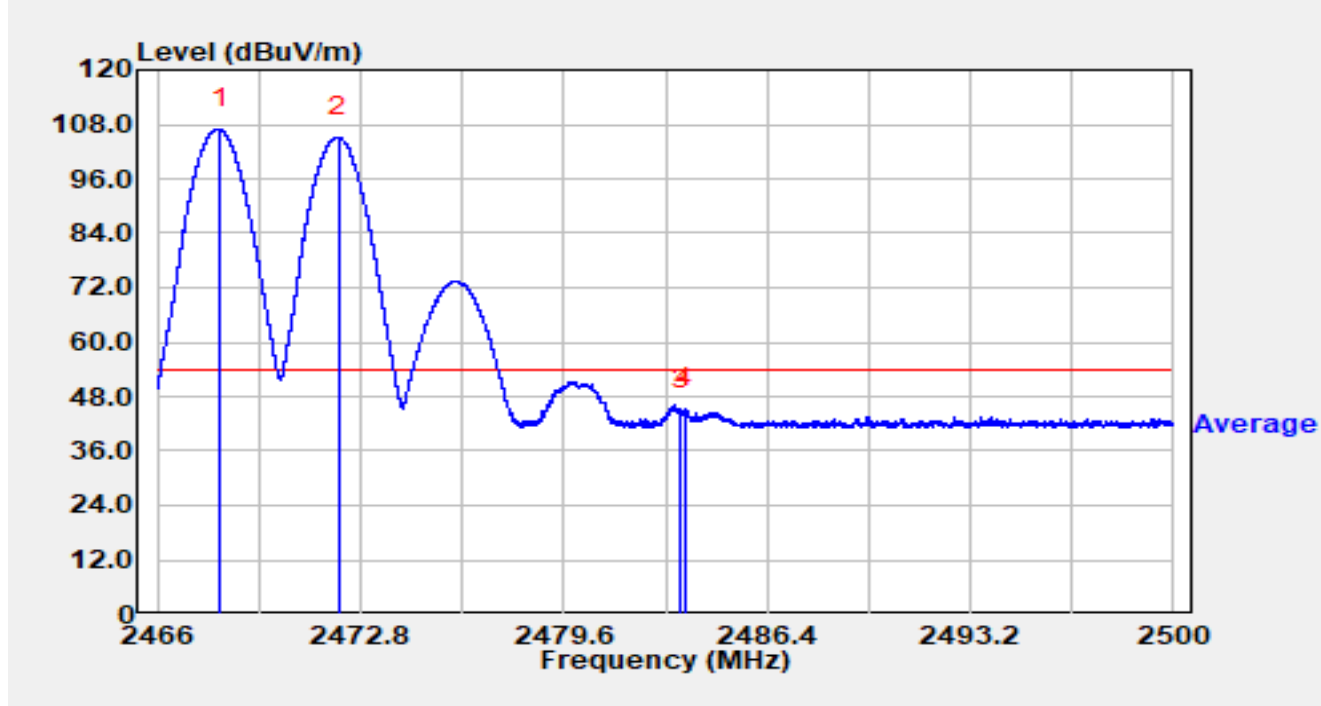


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.091        | 77.31          | 29.72      | 107.03               | N/A         | N/A            | Average  |
| 2  |      | 2472.059        | 75.33          | 29.73      | 105.06               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 15.32          | 29.76      | 45.09                | -8.91       | 54.00          | Average  |
| 4  | *    | 2483.649        | 15.53          | 29.76      | 45.30                | -8.70       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2472MHz |               |            |

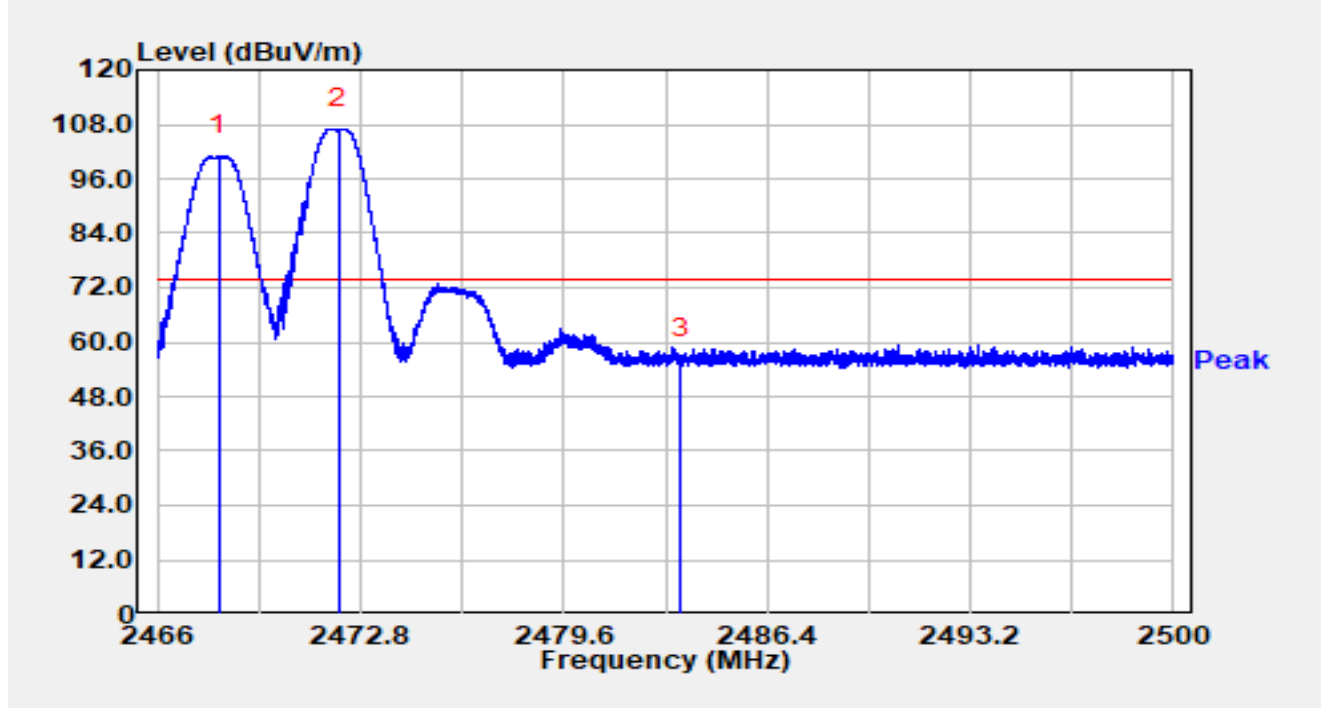


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.067        | 71.27          | 29.72      | 100.99               | N/A         | N/A            | Peak     |
| 2  |      | 2472.083        | 77.31          | 29.73      | 107.04               | N/A         | N/A            | Peak     |
| 3  | *    | 2483.500        | 26.49          | 29.76      | 56.25                | -17.75      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2472MHz |               |            |

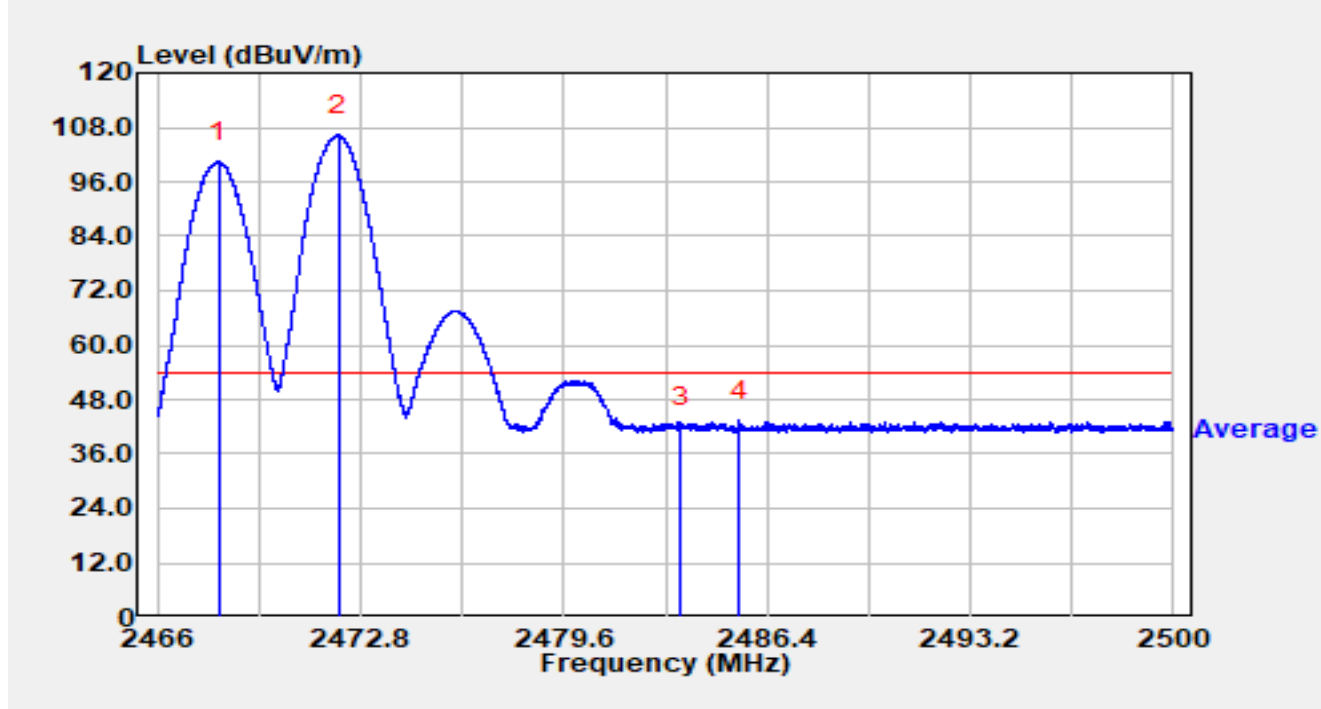


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.074        | 70.63          | 29.72      | 100.35               | N/A         | N/A            | Average  |
| 2  |      | 2472.045        | 76.54          | 29.73      | 106.27               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.06          | 29.76      | 41.82                | -12.18      | 54.00          | Average  |
| 4  | *    | 2485.475        | 13.58          | 29.77      | 43.35                | -10.65      | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2472MHz |               |            |

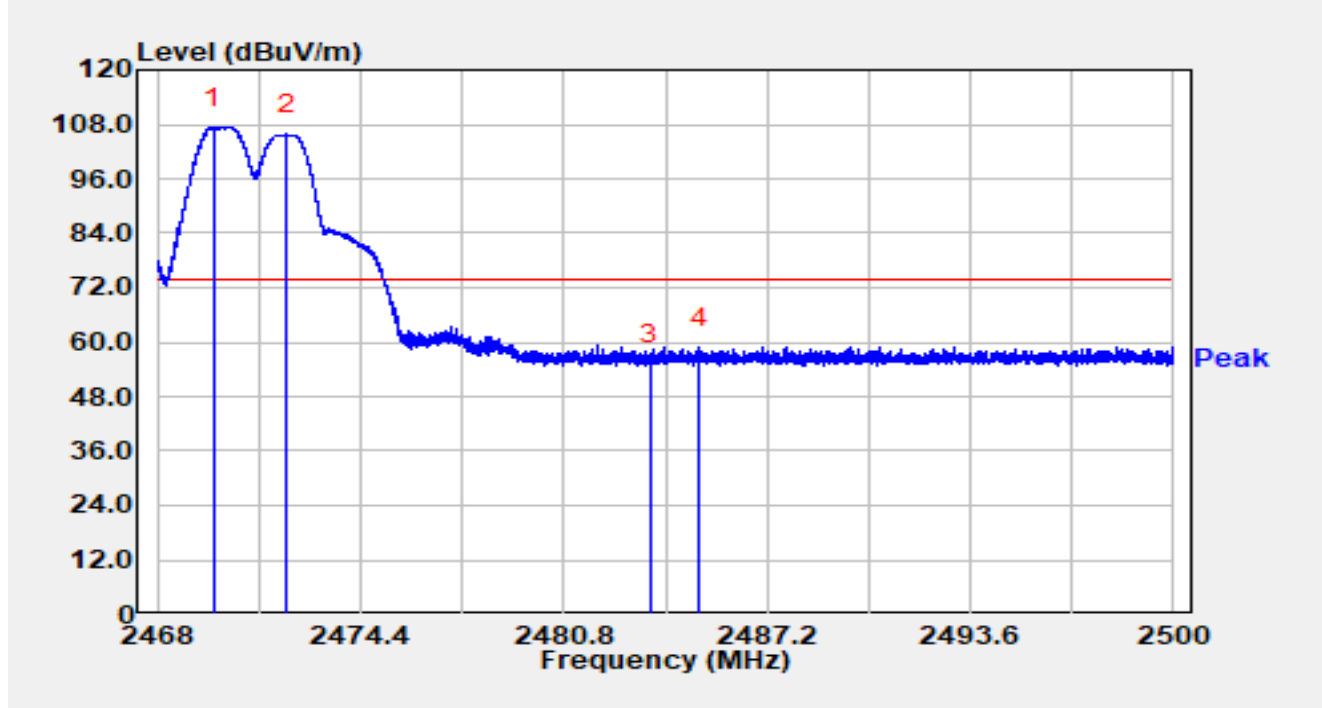


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2469.789        | 77.54          | 29.72      | 107.26               | N/A         | N/A            | Peak     |
| 2  |      | 2472.090        | 76.03          | 29.73      | 105.76               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 25.39          | 29.76      | 55.16                | -18.84      | 74.00          | Peak     |
| 4  | *    | 2485.066        | 29.01          | 29.77      | 58.78                | -15.22      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2472MHz |               |            |

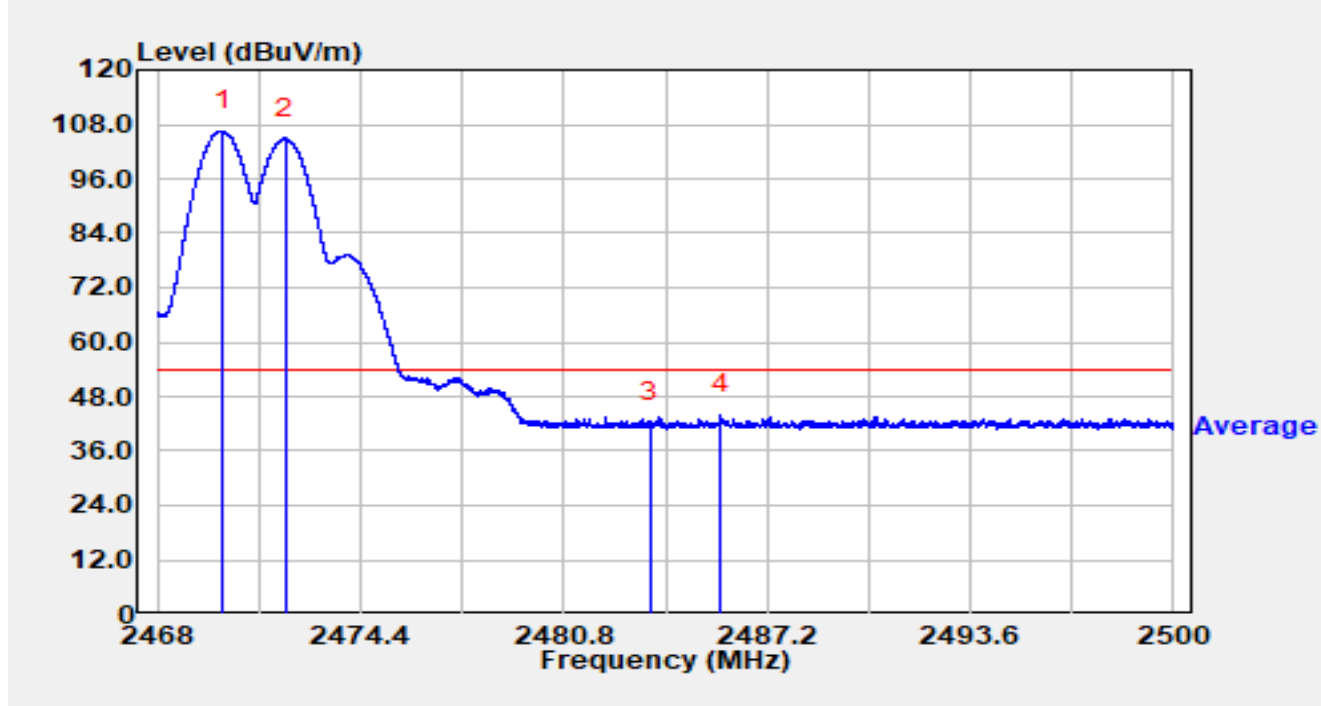


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2470.064        | 76.92          | 29.72      | 106.64               | N/A         | N/A            | Average  |
| 2  |      | 2472.038        | 75.14          | 29.73      | 104.87               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.79          | 29.76      | 42.55                | -11.45      | 54.00          | Average  |
| 4  | *    | 2485.725        | 14.16          | 29.77      | 43.93                | -10.07      | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2472MHz |               |            |

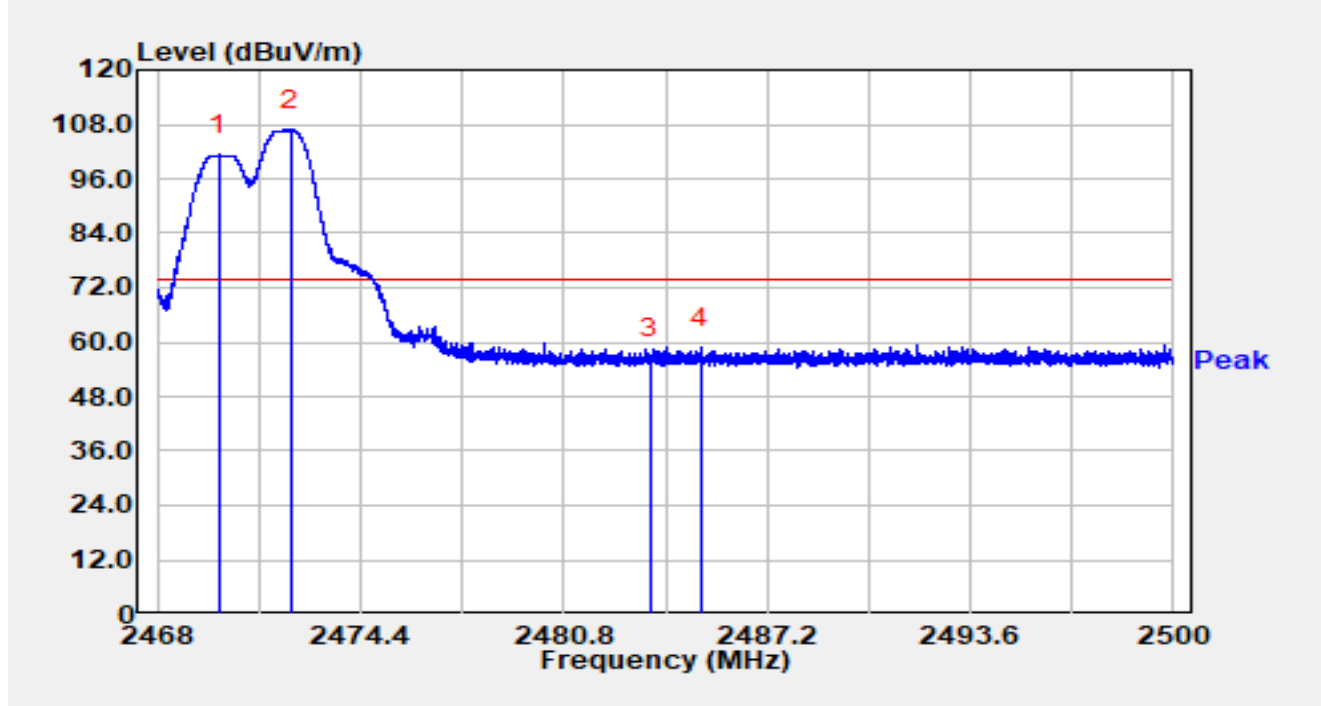


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2469.946        | 71.53          | 29.72      | 101.26               | N/A         | N/A            | Peak     |
| 2  |      | 2472.189        | 77.07          | 29.73      | 106.80               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 26.40          | 29.76      | 56.16                | -17.84      | 74.00          | Peak     |
| 4  | *    | 2485.126        | 29.03          | 29.77      | 58.80                | -15.20      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2472MHz |               |            |

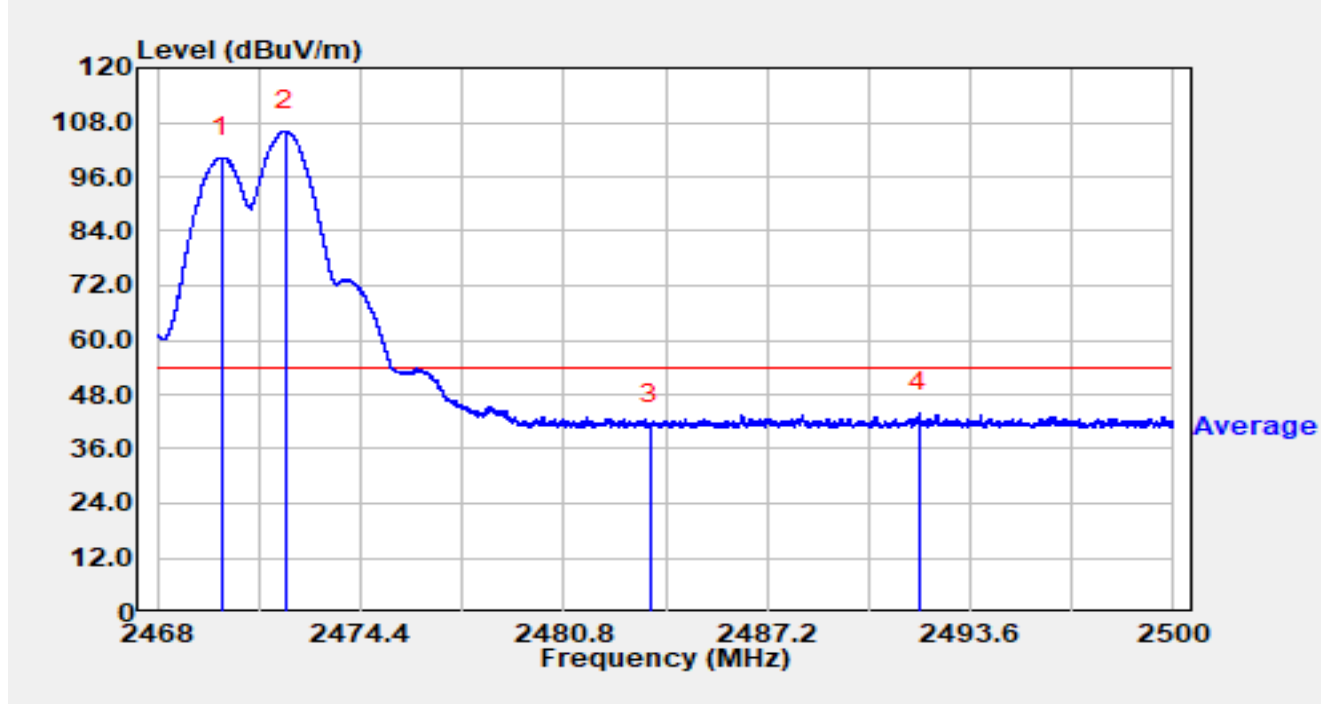


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2470.038        | 70.51          | 29.72      | 100.24               | N/A         | N/A            | Average  |
| 2  |      | 2472.038        | 76.31          | 29.73      | 106.03               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 11.76          | 29.76      | 41.53                | -12.47      | 54.00          | Average  |
| 4  | *    | 2491.984        | 14.14          | 29.79      | 43.93                | -10.07      | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2474MHz |               |            |

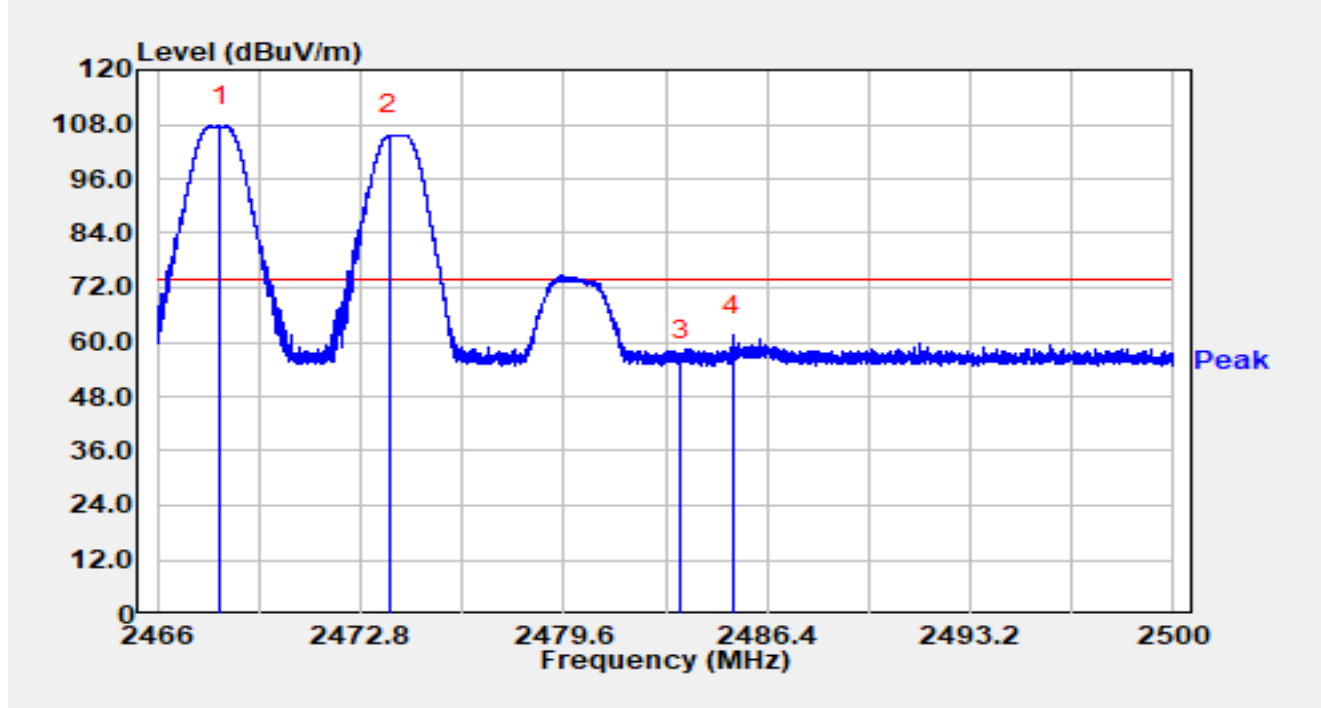


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.108        | 78.00          | 29.72      | 107.73               | N/A         | N/A            | Peak     |
| 2  |      | 2473.779        | 75.91          | 29.73      | 105.64               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 26.05          | 29.76      | 55.82                | -18.18      | 74.00          | Peak     |
| 4  | *    | 2485.244        | 31.72          | 29.77      | 61.49                | -12.51      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2474MHz |               |            |

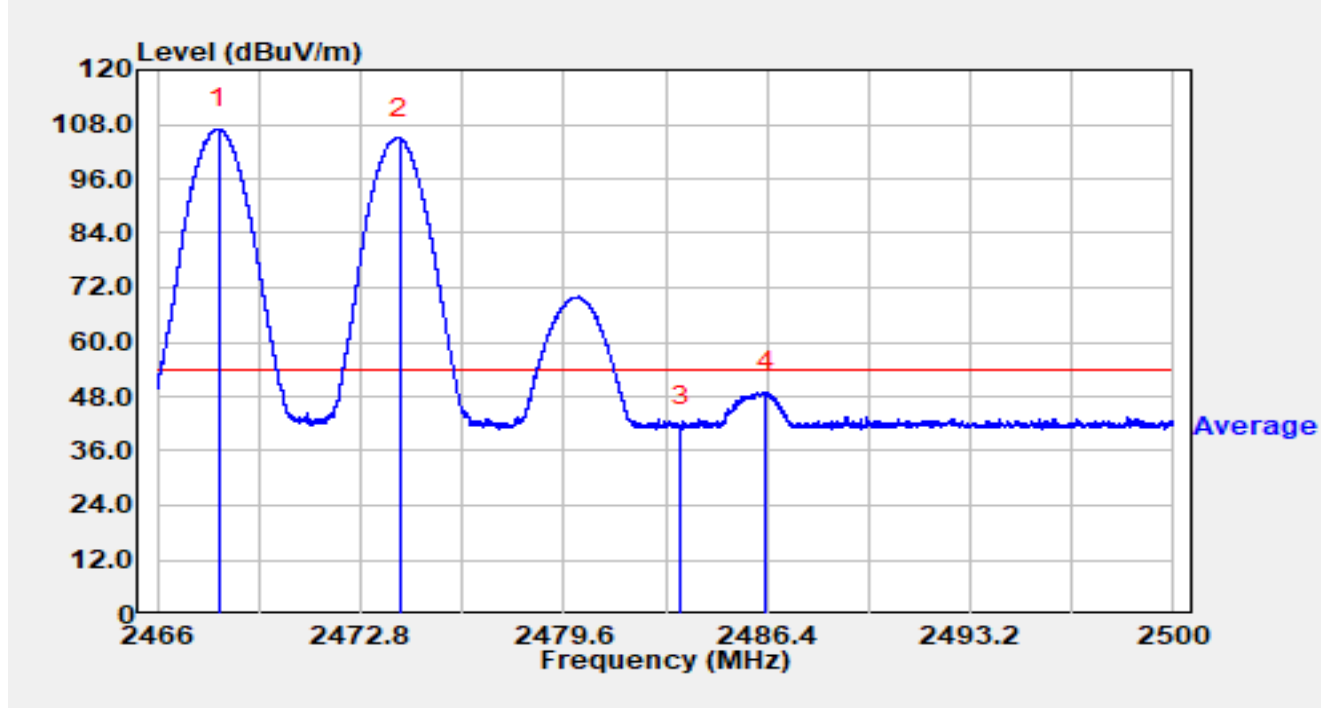


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.077        | 77.30          | 29.72      | 107.02               | N/A         | N/A            | Average  |
| 2  |      | 2474.095        | 75.25          | 29.73      | 104.99               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 11.78          | 29.76      | 41.55                | -12.45      | 54.00          | Average  |
| 4  | *    | 2486.376        | 19.20          | 29.77      | 48.98                | -5.02       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2474MHz |               |            |

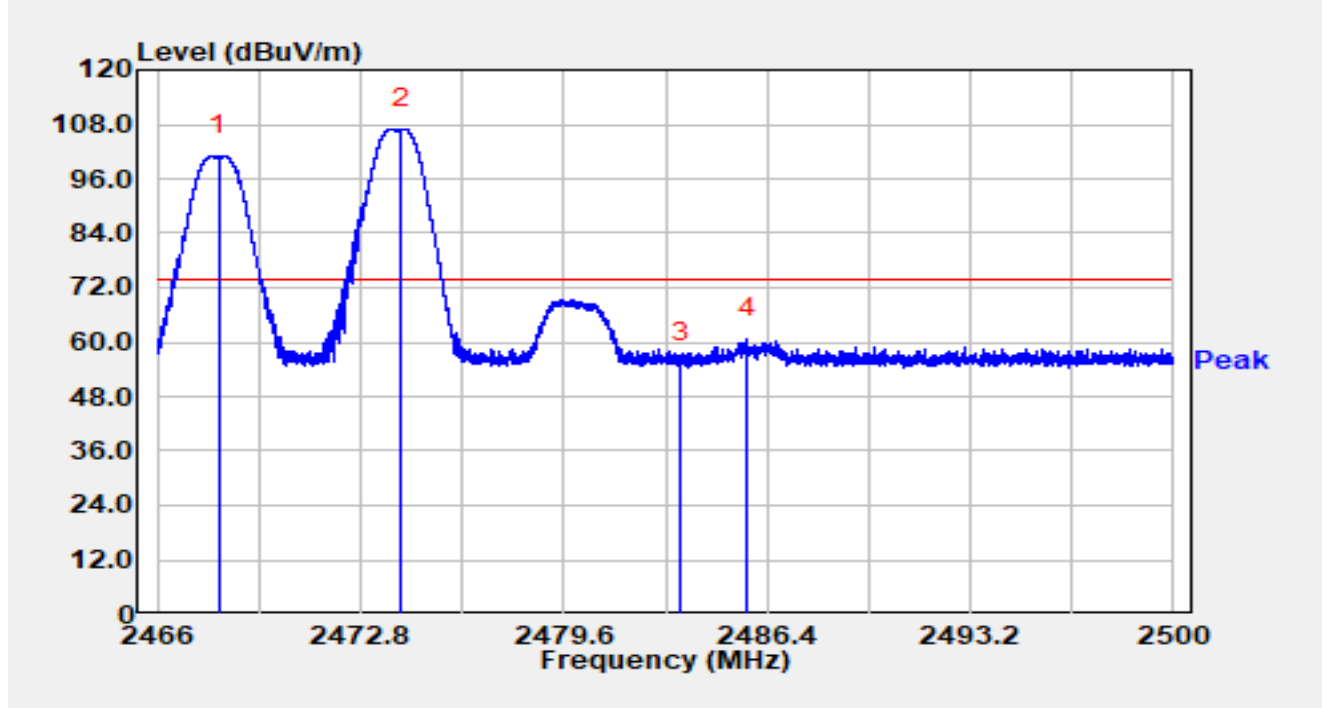


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.067        | 71.43          | 29.72      | 101.15               | N/A         | N/A            | Peak     |
| 2  |      | 2474.143        | 77.32          | 29.73      | 107.06               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 25.73          | 29.76      | 55.49                | -18.51      | 74.00          | Peak     |
| 4  | *    | 2485.750        | 30.94          | 29.77      | 60.71                | -13.29      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2474MHz |               |            |

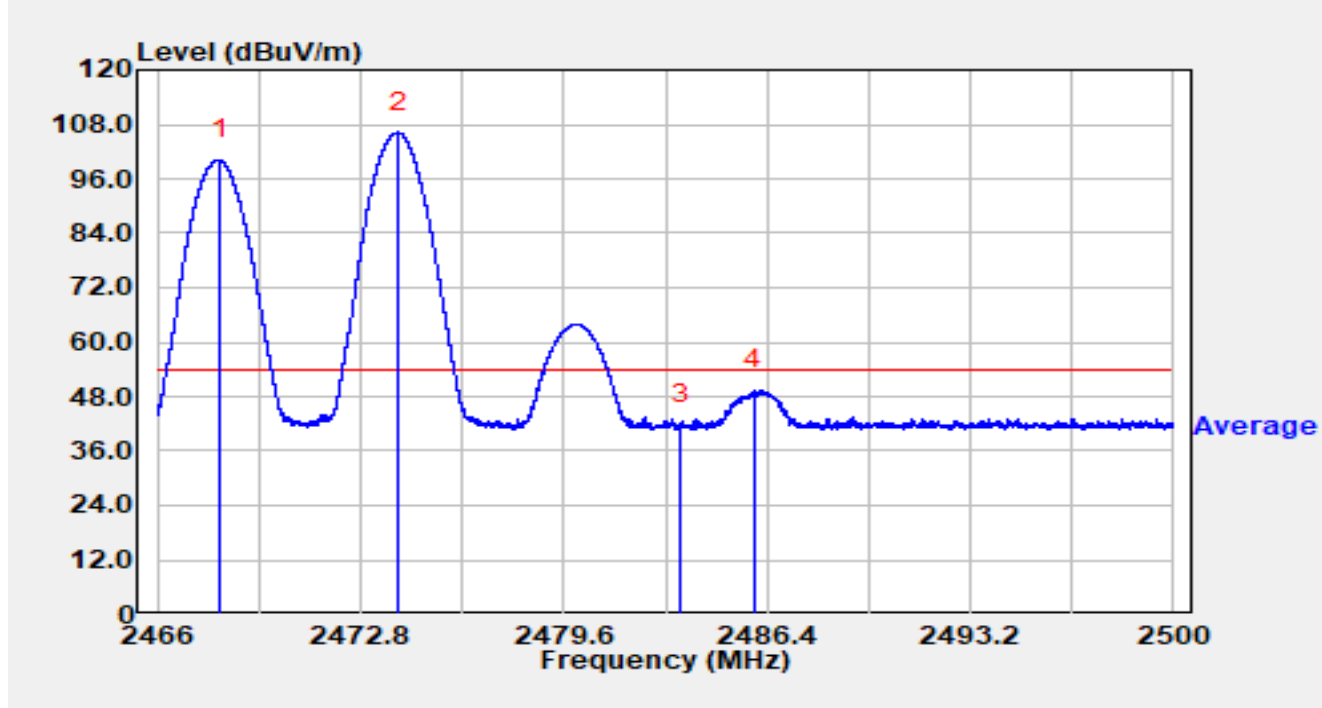


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.091        | 70.38          | 29.72      | 100.10               | N/A         | N/A            | Average  |
| 2  |      | 2474.051        | 76.47          | 29.73      | 106.20               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.12          | 29.76      | 41.89                | -12.11      | 54.00          | Average  |
| 4  | *    | 2485.958        | 19.76          | 29.77      | 49.53                | -4.47       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2474MHz |               |            |

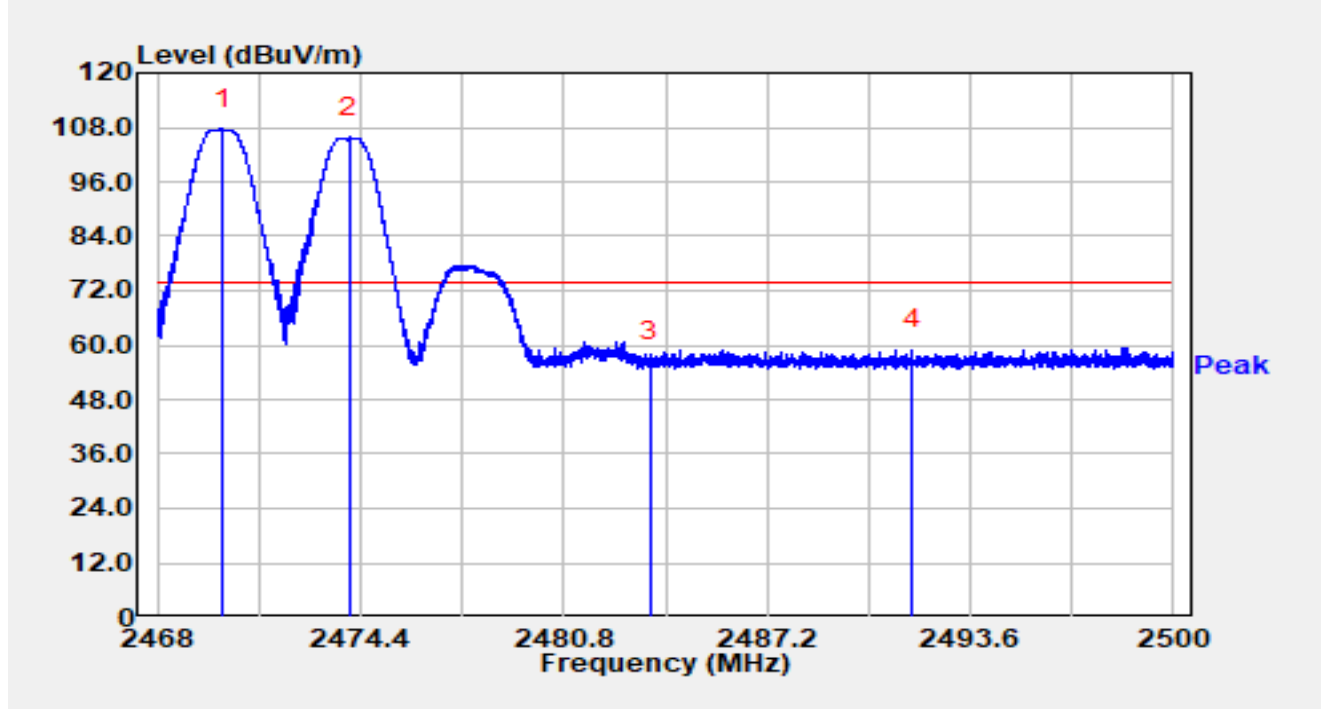


| No | Mark | Frequency<br>(MHz) | Reading<br>(dBμV) | C.F<br>(dB/m) | Measurement<br>(dBμV/m) | Margin<br>(dB) | Limit<br>(dBμV/m) | Detector |
|----|------|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------|
| 1  |      | 2470.064           | 77.98             | 29.72         | 107.70                  | N/A            | N/A               | Peak     |
| 2  |      | 2474.058           | 76.02             | 29.73         | 105.75                  | N/A            | N/A               | Peak     |
| 3  |      | 2483.500           | 26.39             | 29.76         | 56.16                   | -17.84         | 74.00             | Peak     |
| 4  | *    | 2491.786           | 29.23             | 29.79         | 59.02                   | -14.98         | 74.00             | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBµV/m) = Reading (dBµV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2474MHz |               |            |

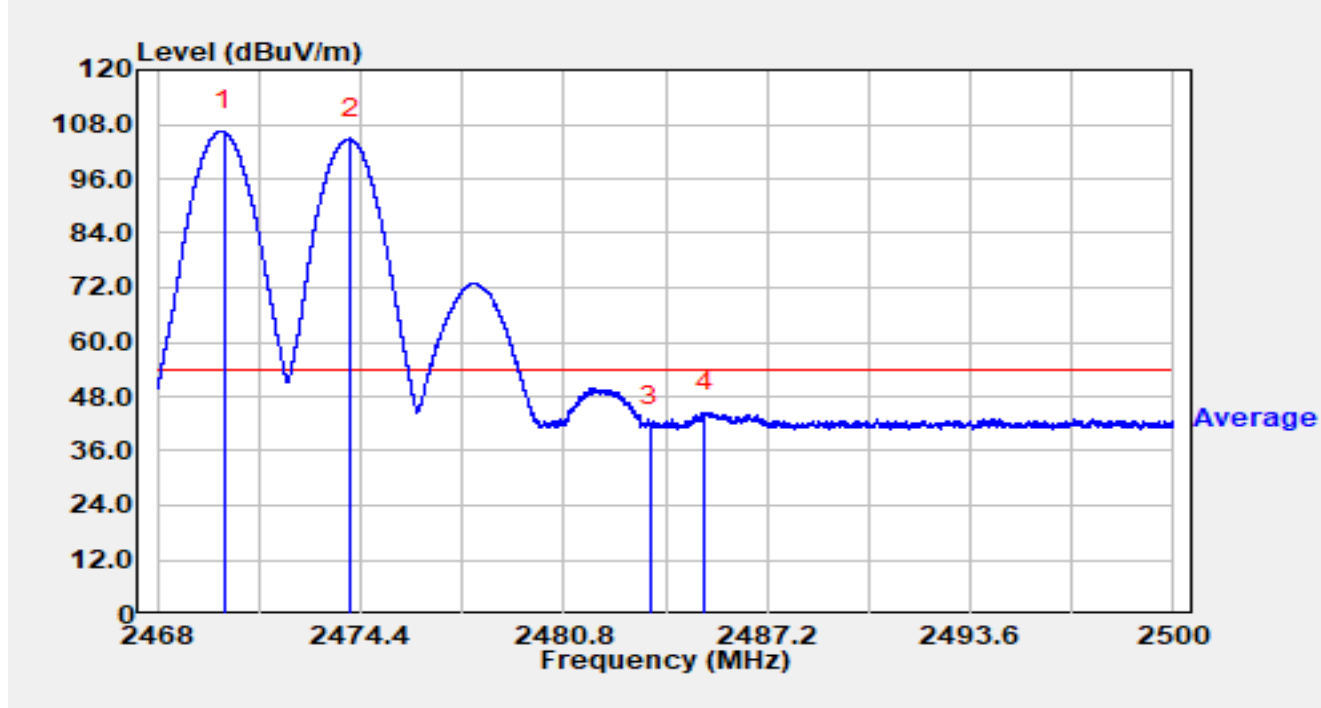


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2470.096        | 76.88          | 29.72      | 106.61               | N/A         | N/A            | Average  |
| 2  |      | 2474.073        | 75.16          | 29.73      | 104.89               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 11.60          | 29.76      | 41.36                | -12.64      | 54.00          | Average  |
| 4  | *    | 2485.222        | 14.68          | 29.77      | 44.45                | -9.55       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2474MHz |               |            |

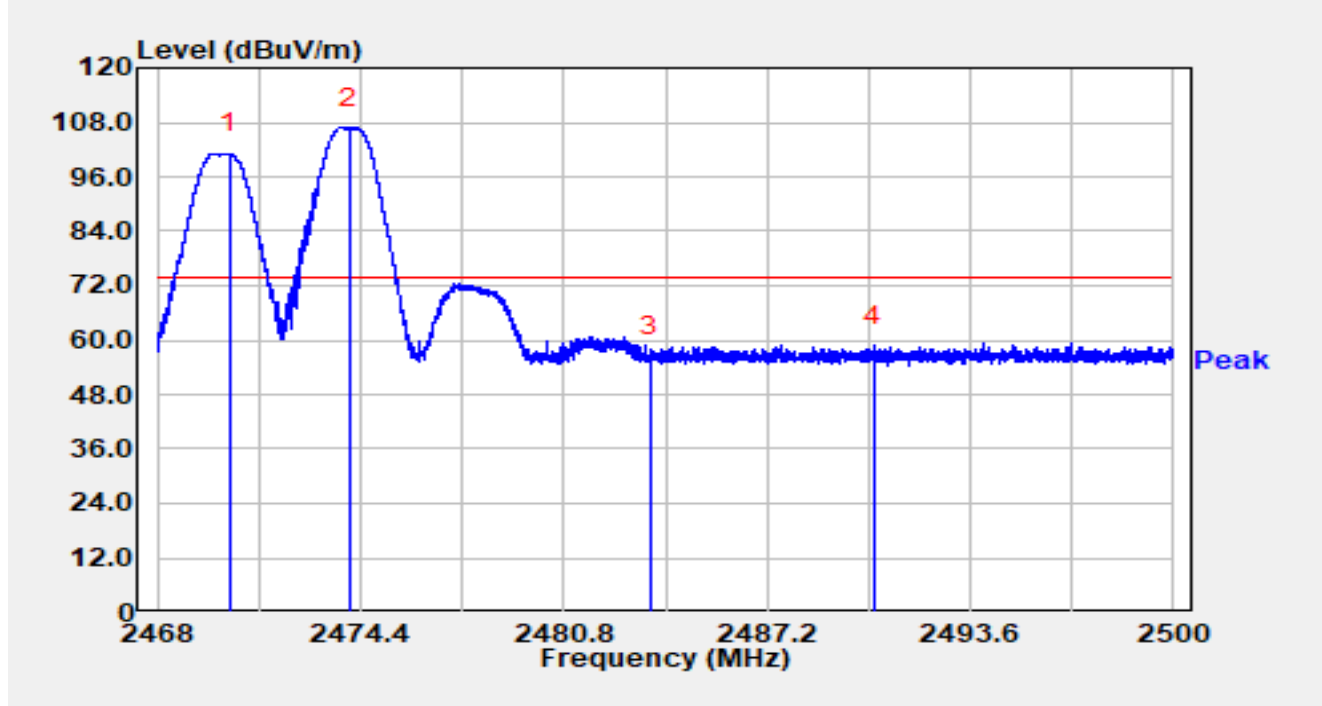


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2470.253        | 71.39          | 29.72      | 101.12               | N/A         | N/A            | Peak     |
| 2  |      | 2474.026        | 77.12          | 29.73      | 106.85               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 26.45          | 29.76      | 56.21                | -17.79      | 74.00          | Peak     |
| 4  | *    | 2490.554        | 28.99          | 29.79      | 58.77                | -15.23      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2474MHz |               |            |

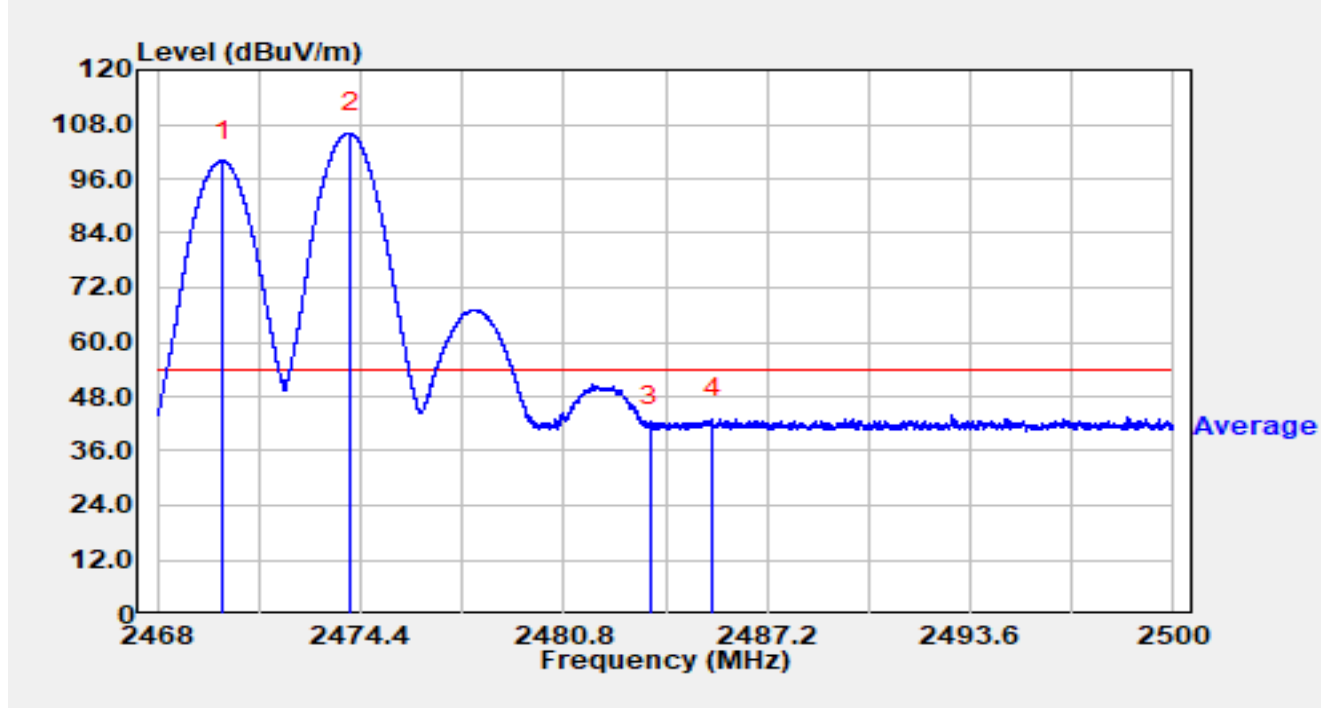


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2470.073        | 70.28          | 29.72      | 100.00               | N/A         | N/A            | Average  |
| 2  |      | 2474.073        | 76.37          | 29.73      | 106.11               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 11.80          | 29.76      | 41.57                | -12.43      | 54.00          | Average  |
| 4  | *    | 2485.472        | 13.34          | 29.77      | 43.11                | -10.89      | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2474MHz |               |            |

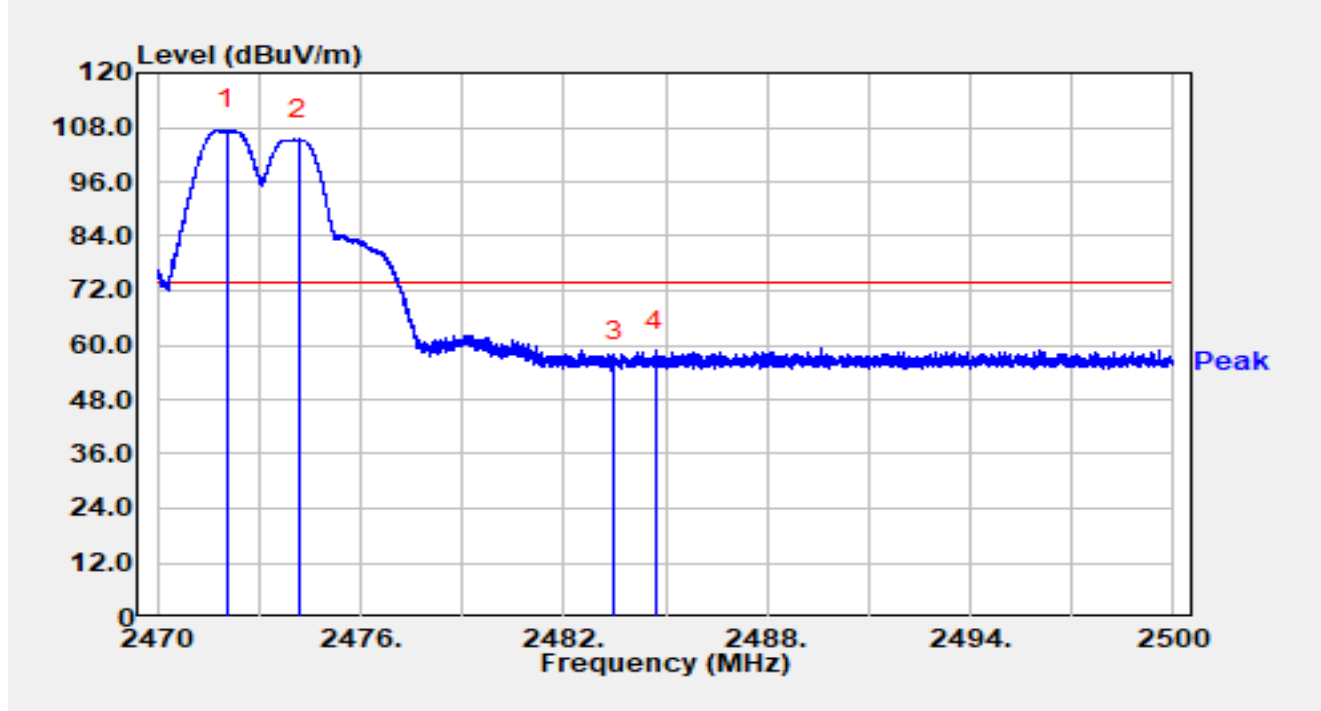


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2472.037        | 77.81          | 29.73      | 107.54               | N/A         | N/A            | Peak     |
| 2  |      | 2474.161        | 75.70          | 29.73      | 105.44               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 26.80          | 29.76      | 56.56                | -17.44      | 74.00          | Peak     |
| 4  | *    | 2484.703        | 28.91          | 29.77      | 58.68                | -15.32      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2474MHz |               |            |

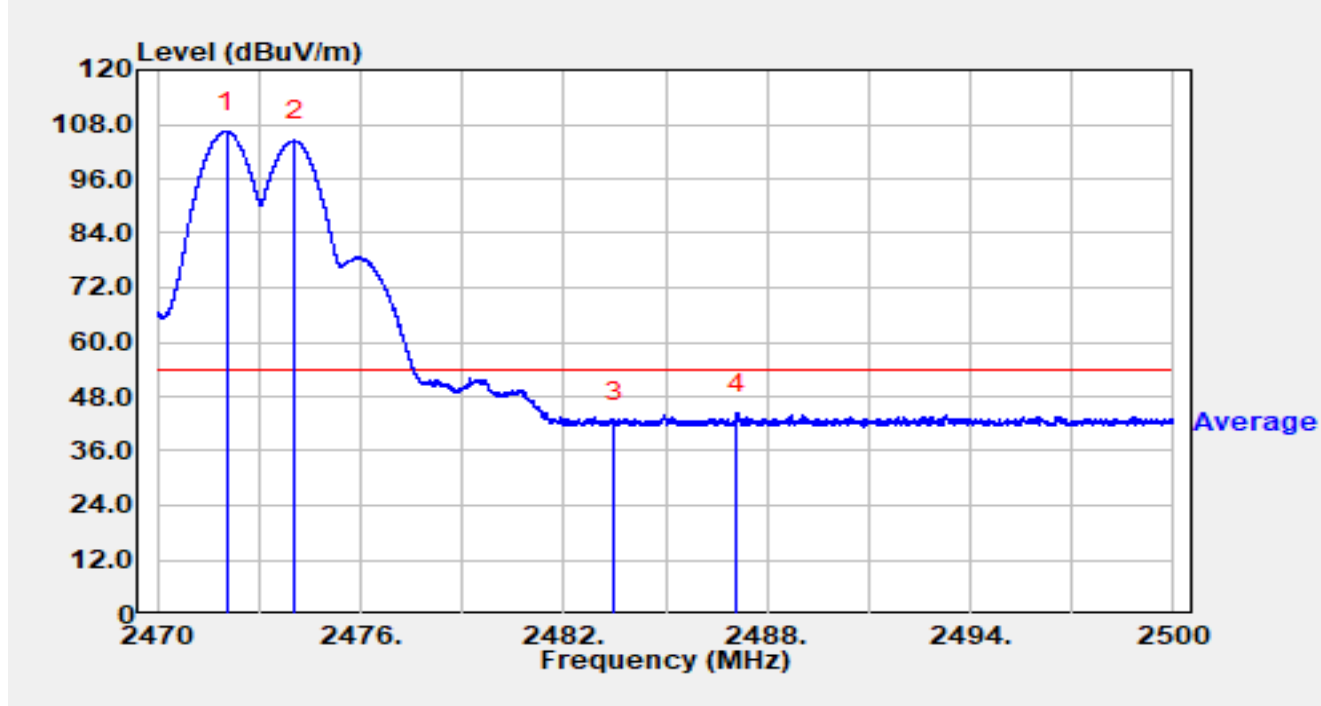


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2472.058        | 76.62          | 29.73      | 106.35               | N/A         | N/A            | Average  |
| 2  |      | 2474.068        | 74.67          | 29.73      | 104.40               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.68          | 29.76      | 42.44                | -11.56      | 54.00          | Average  |
| 4  | *    | 2487.121        | 14.59          | 29.78      | 44.37                | -9.63       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2474MHz |               |            |

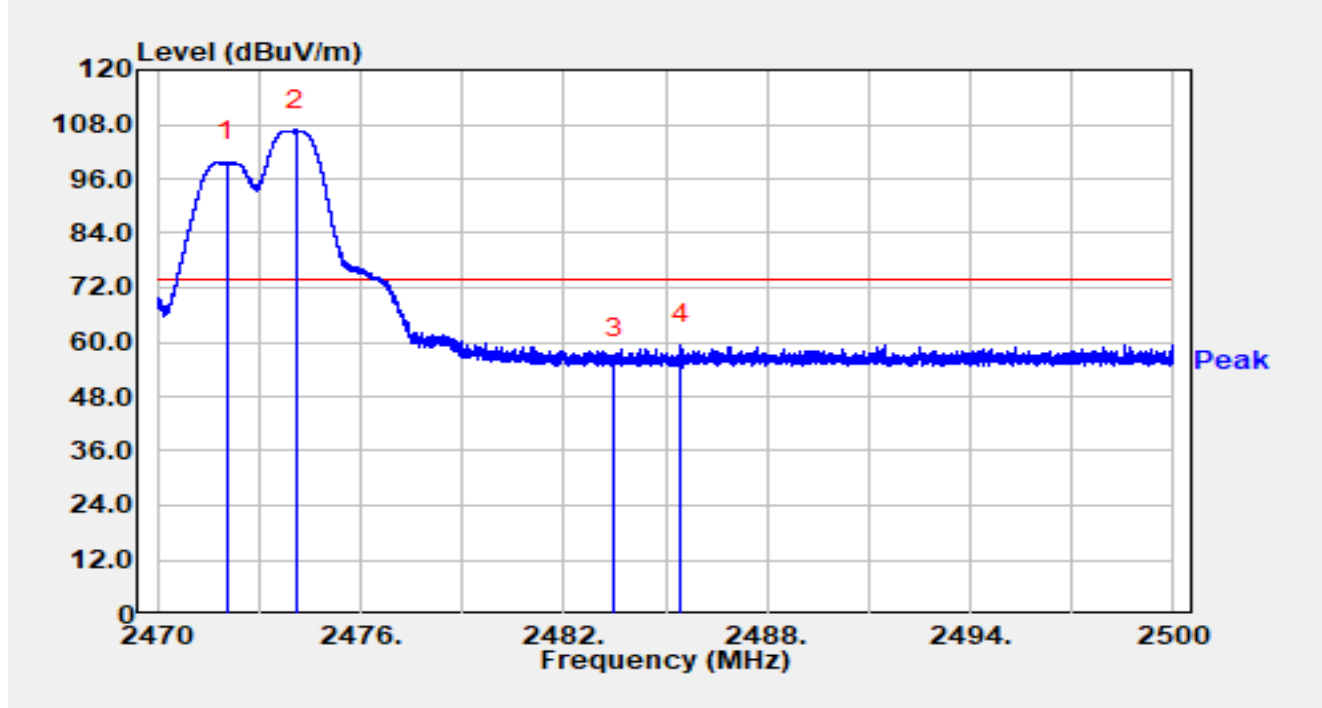


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2472.061        | 70.00          | 29.73      | 99.73                | N/A         | N/A            | Peak     |
| 2  |      | 2474.077        | 76.96          | 29.73      | 106.69               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 26.73          | 29.76      | 56.50                | -17.50      | 74.00          | Peak     |
| 4  | *    | 2485.441        | 29.72          | 29.77      | 59.49                | -14.51      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2474MHz |               |            |

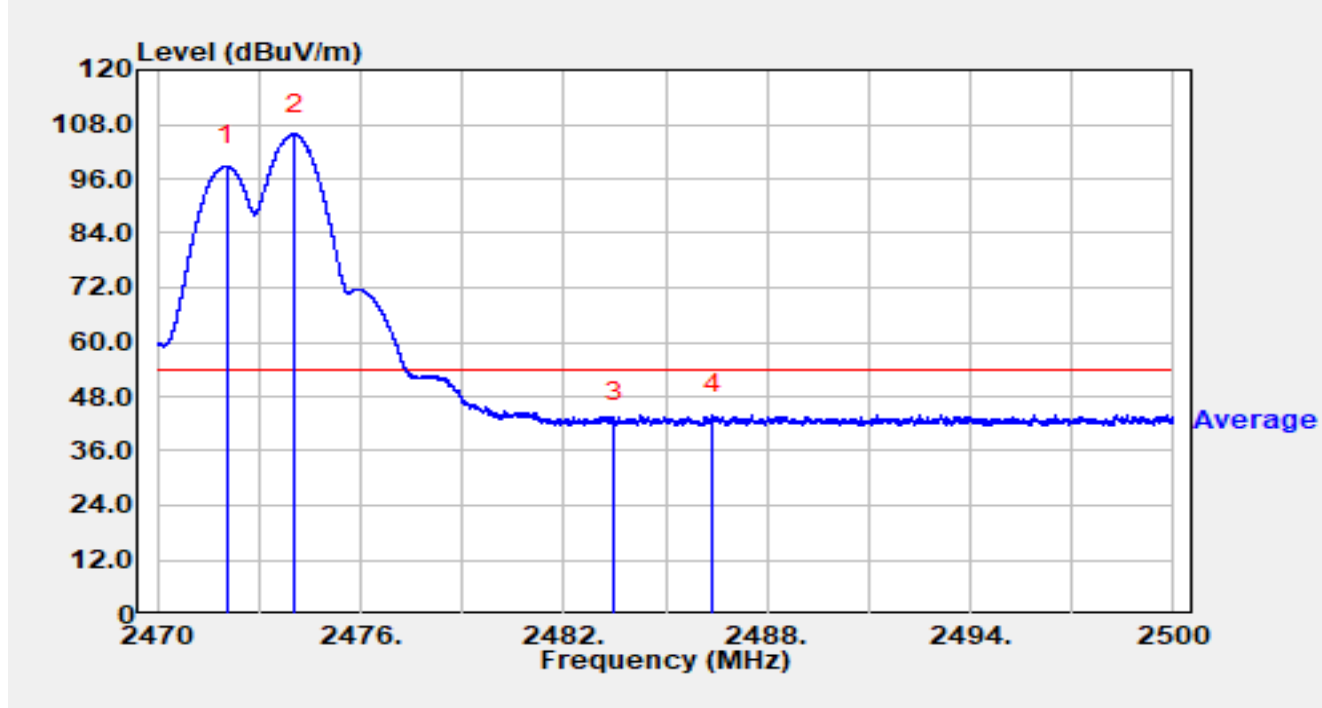


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2472.049        | 69.09          | 29.73      | 98.82                | N/A         | N/A            | Average  |
| 2  |      | 2474.065        | 76.15          | 29.73      | 105.88               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.61          | 29.76      | 42.37                | -11.63      | 54.00          | Average  |
| 4  | *    | 2486.377        | 14.37          | 29.77      | 44.14                | -9.86       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2476MHz |               |            |

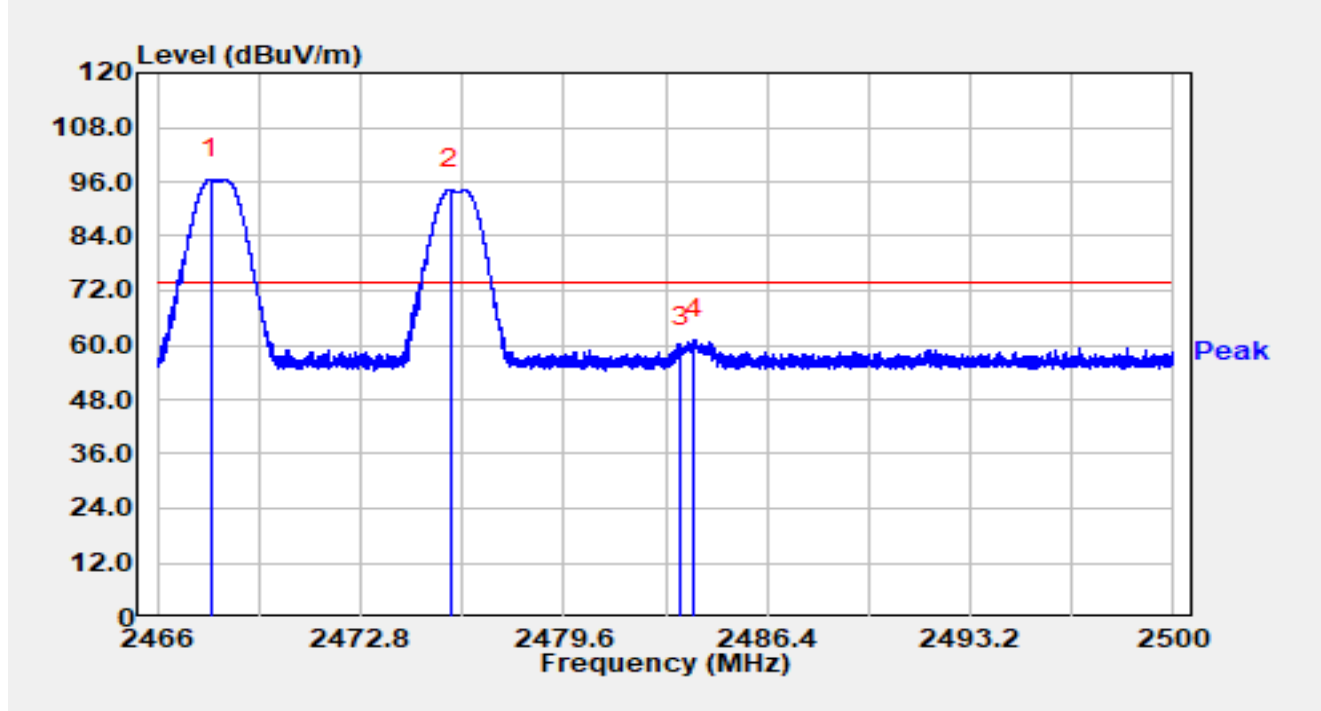


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2467.775        | 66.77          | 29.72      | 96.49                | N/A         | N/A            | Peak     |
| 2  |      | 2475.789        | 64.47          | 29.74      | 94.21                | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 29.62          | 29.76      | 59.38                | -14.62      | 74.00          | Peak     |
| 4  | *    | 2483.962        | 31.50          | 29.77      | 61.26                | -12.74      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2476MHz |               |            |

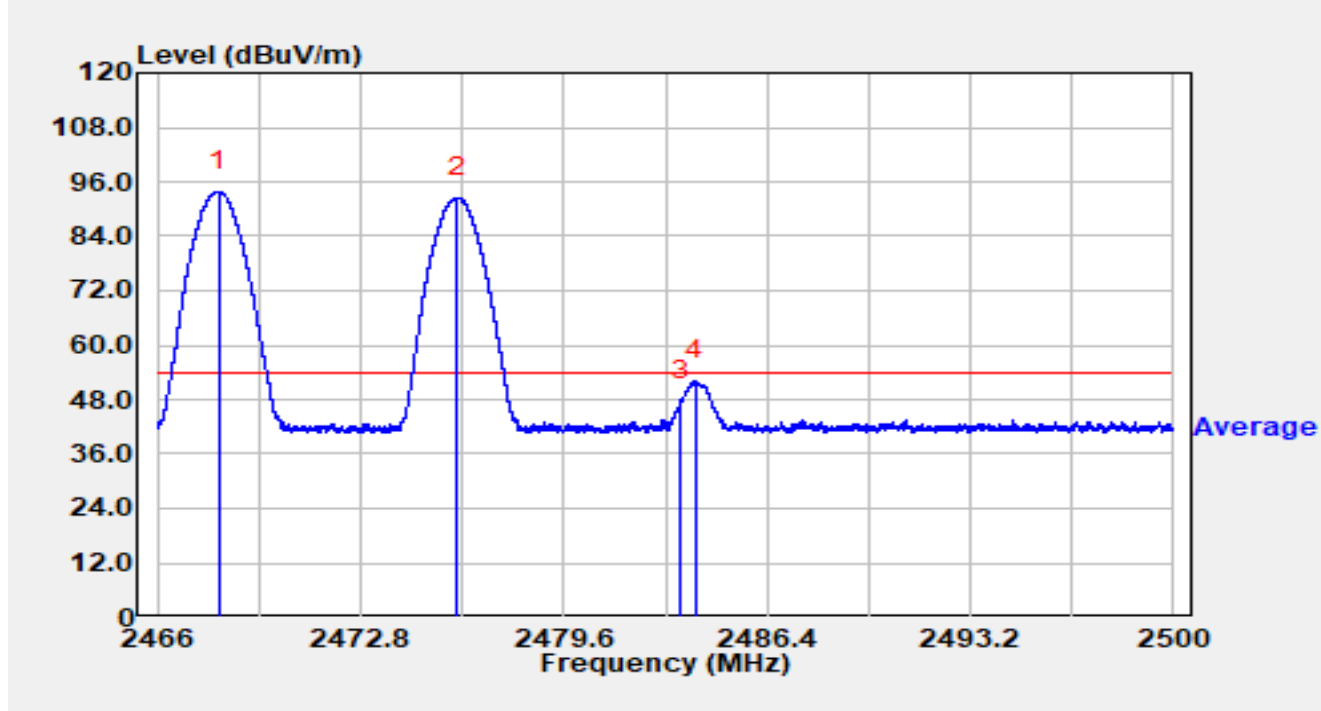


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.037        | 64.24          | 29.72      | 93.96                | N/A         | N/A            | Average  |
| 2  |      | 2476.030        | 62.66          | 29.74      | 92.40                | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 17.87          | 29.76      | 47.64                | -6.36       | 54.00          | Average  |
| 4  | *    | 2484.006        | 22.44          | 29.77      | 52.20                | -1.80       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2476MHz |               |            |

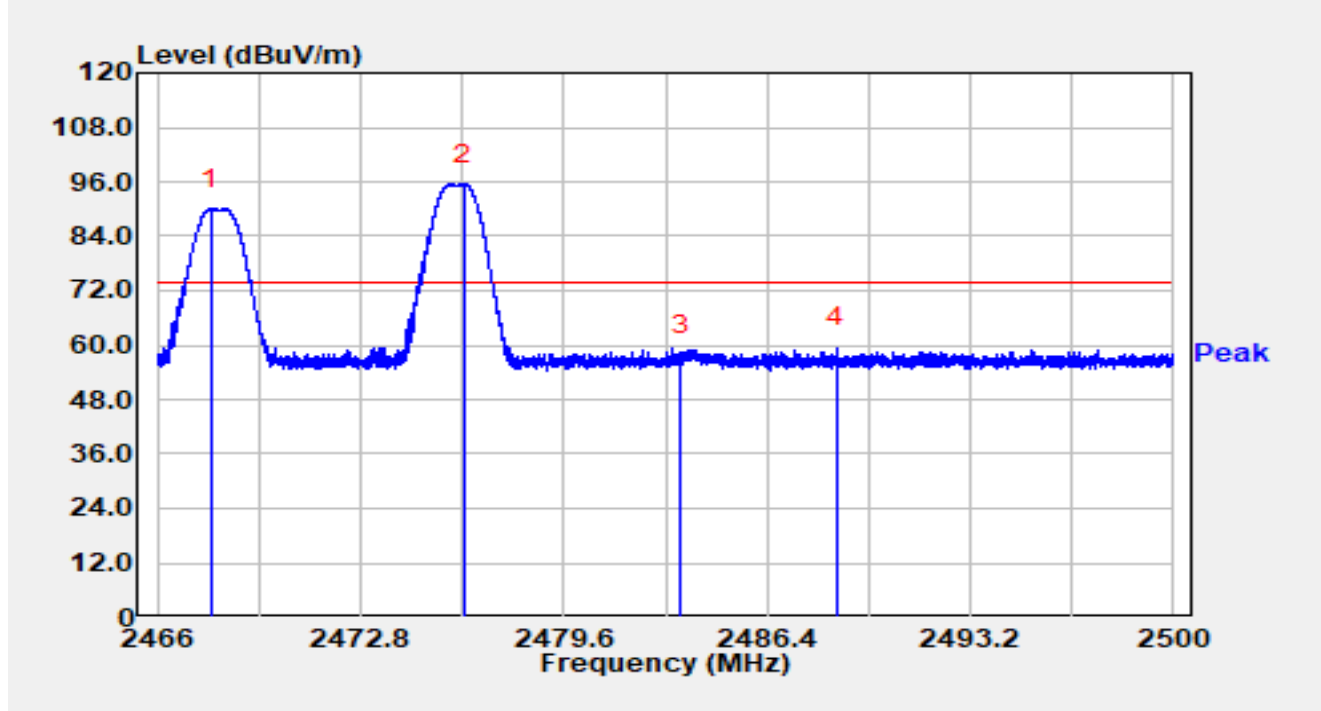


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2467.802        | 60.33          | 29.72      | 90.05                | N/A         | N/A            | Peak     |
| 2  |      | 2476.271        | 65.74          | 29.74      | 95.48                | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 27.78          | 29.76      | 57.55                | -16.45      | 74.00          | Peak     |
| 4  | *    | 2488.743        | 29.69          | 29.78      | 59.47                | -14.53      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2476MHz |               |            |

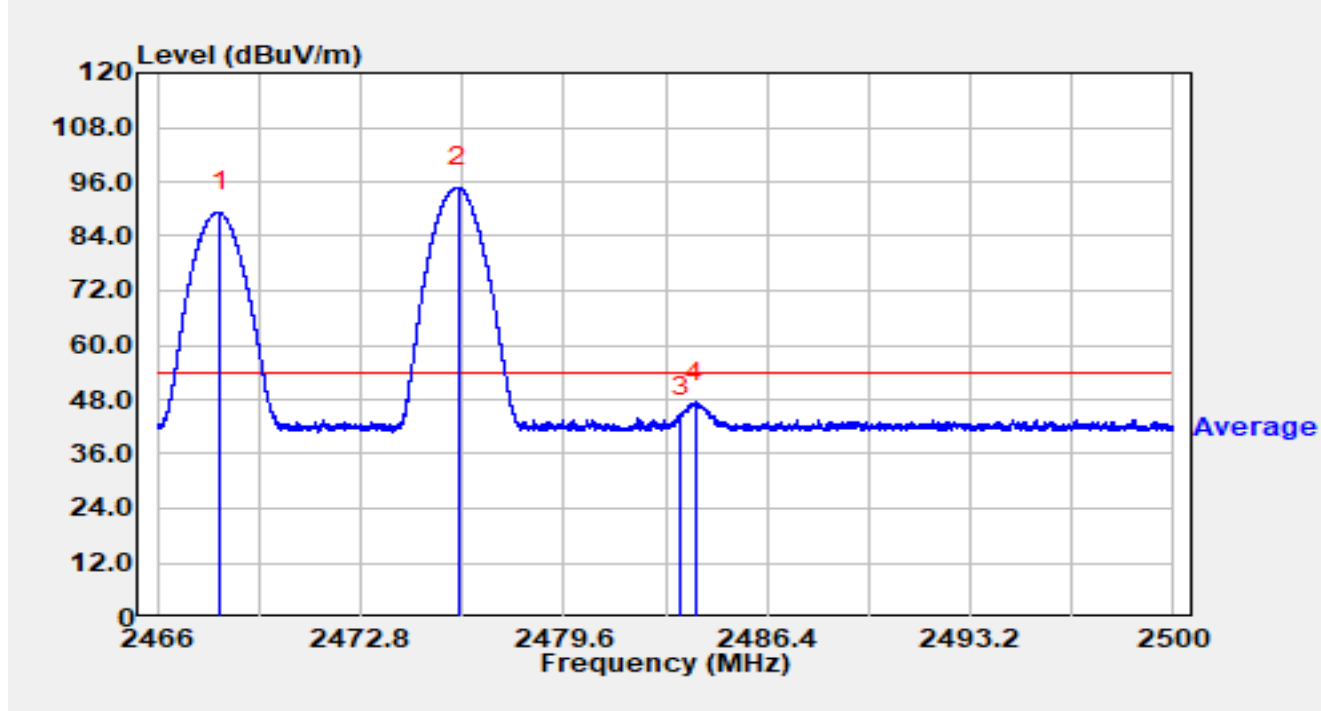


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.101        | 59.56          | 29.72      | 89.28                | N/A         | N/A            | Average  |
| 2  |      | 2476.057        | 65.10          | 29.74      | 94.84                | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 14.32          | 29.76      | 44.08                | -9.92       | 54.00          | Average  |
| 4  | *    | 2484.023        | 17.57          | 29.77      | 47.34                | -6.66       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2476MHz |               |            |

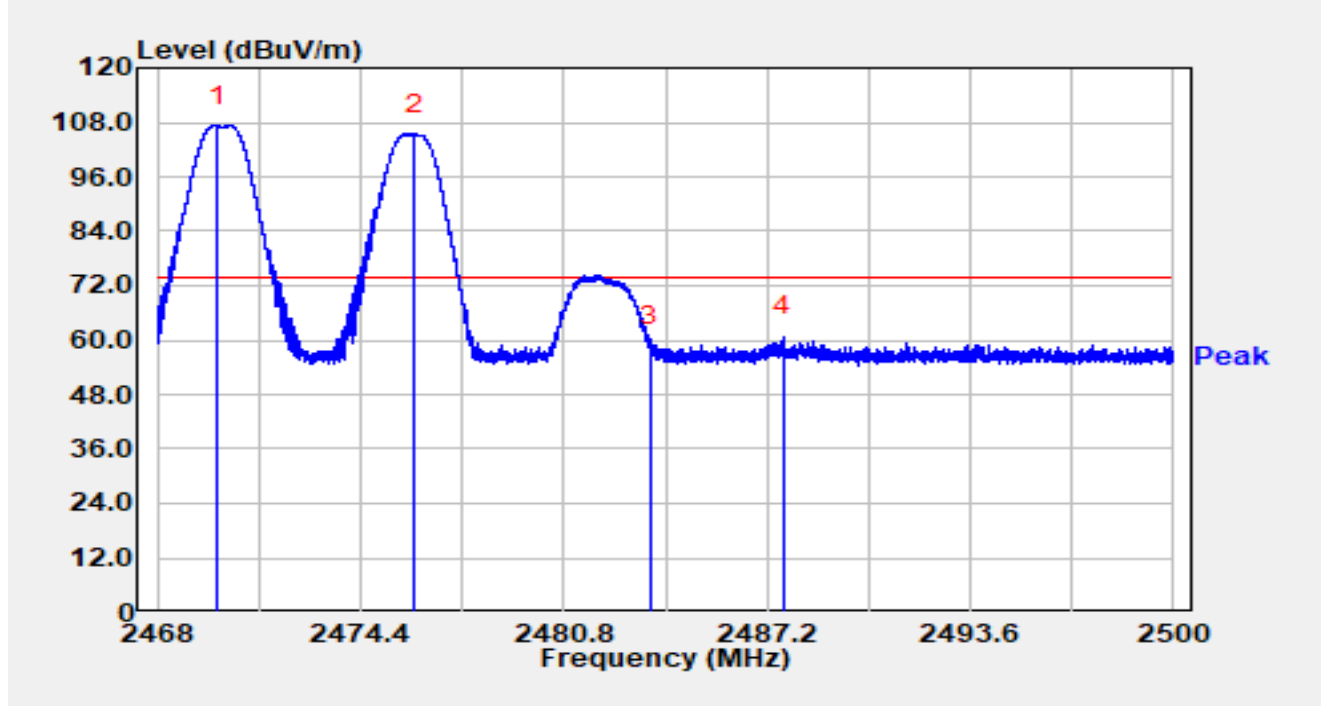


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2469.882        | 77.59          | 29.72      | 107.31               | N/A         | N/A            | Peak     |
| 2  |      | 2476.086        | 75.75          | 29.74      | 105.48               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 28.82          | 29.76      | 58.58                | -15.42      | 74.00          | Peak     |
| 4  | *    | 2487.712        | 31.09          | 29.78      | 60.87                | -13.13      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2476MHz |               |            |

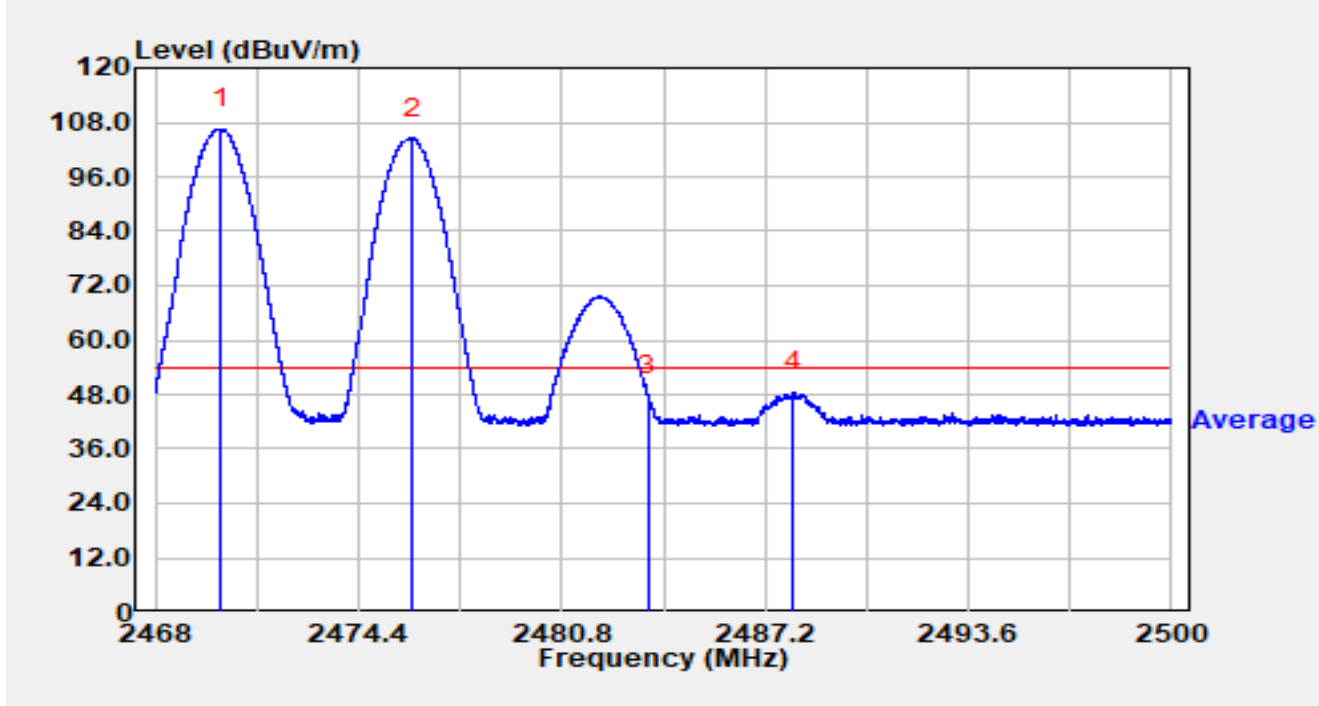


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2470.073        | 76.86          | 29.72      | 106.59               | N/A         | N/A            | Average  |
| 2  |      | 2476.090        | 74.80          | 29.74      | 104.53               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 18.11          | 29.76      | 47.88                | -6.12       | 54.00          | Average  |
| 4  | *    | 2488.106        | 18.76          | 29.78      | 48.54                | -5.46       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2476MHz |               |            |

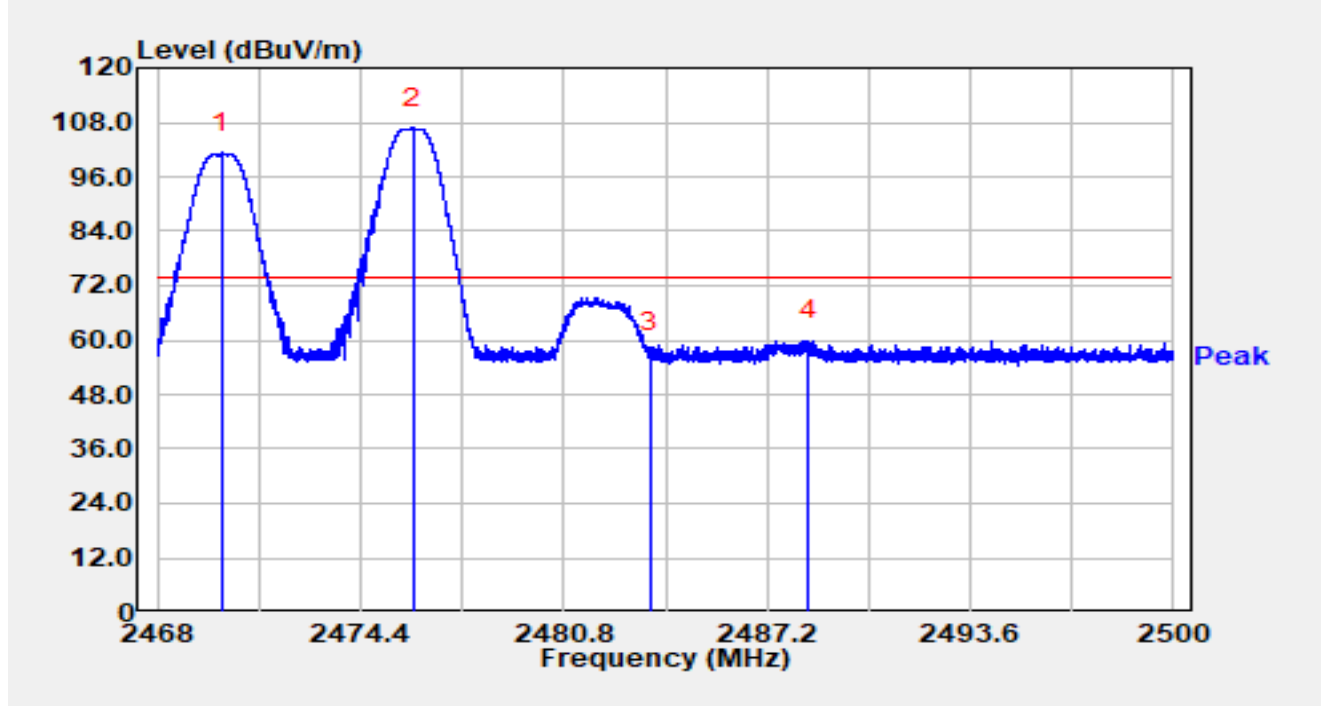


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2470.035        | 71.57          | 29.72      | 101.29               | N/A         | N/A            | Peak     |
| 2  |      | 2476.061        | 77.02          | 29.74      | 106.76               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 27.43          | 29.76      | 57.20                | -16.80      | 74.00          | Peak     |
| 4  | *    | 2488.512        | 30.15          | 29.78      | 59.93                | -14.07      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2476MHz |               |            |

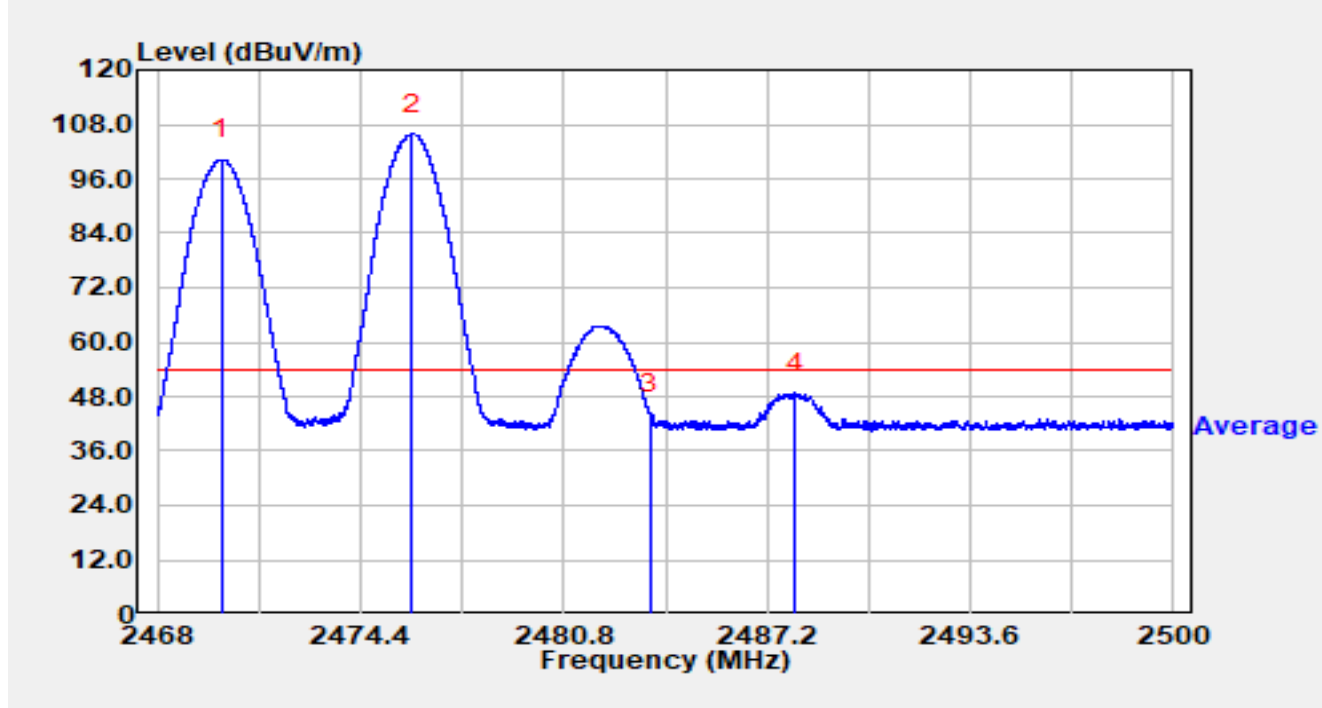


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2470.019        | 70.47          | 29.72      | 100.19               | N/A         | N/A            | Average  |
| 2  |      | 2476.032        | 76.21          | 29.74      | 105.95               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 14.49          | 29.76      | 44.26                | -9.74       | 54.00          | Average  |
| 4  | *    | 2488.102        | 19.04          | 29.78      | 48.82                | -5.18       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2476MHz |               |            |

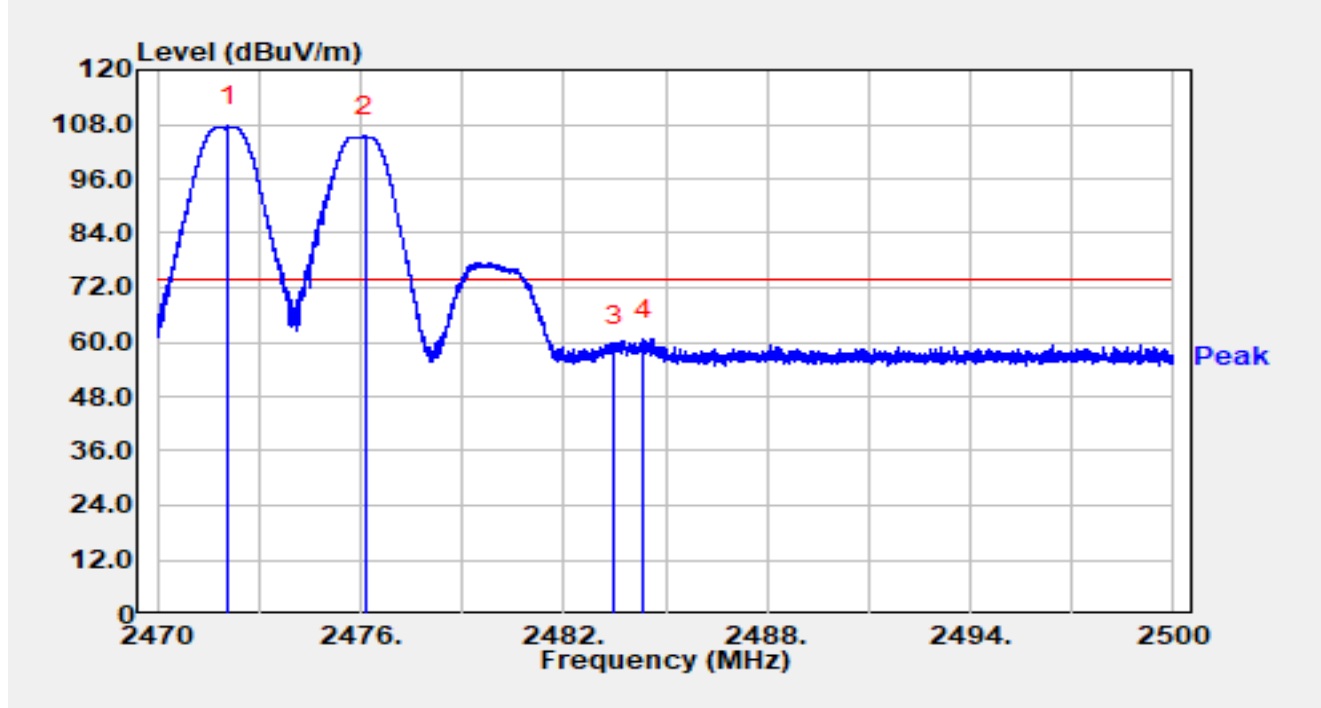


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2472.073        | 77.90          | 29.73      | 107.62               | N/A         | N/A            | Peak     |
| 2  |      | 2476.156        | 75.61          | 29.74      | 105.35               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 29.37          | 29.76      | 59.14                | -14.86      | 74.00          | Peak     |
| 4  | *    | 2484.352        | 30.83          | 29.77      | 60.60                | -13.40      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2476MHz |               |            |

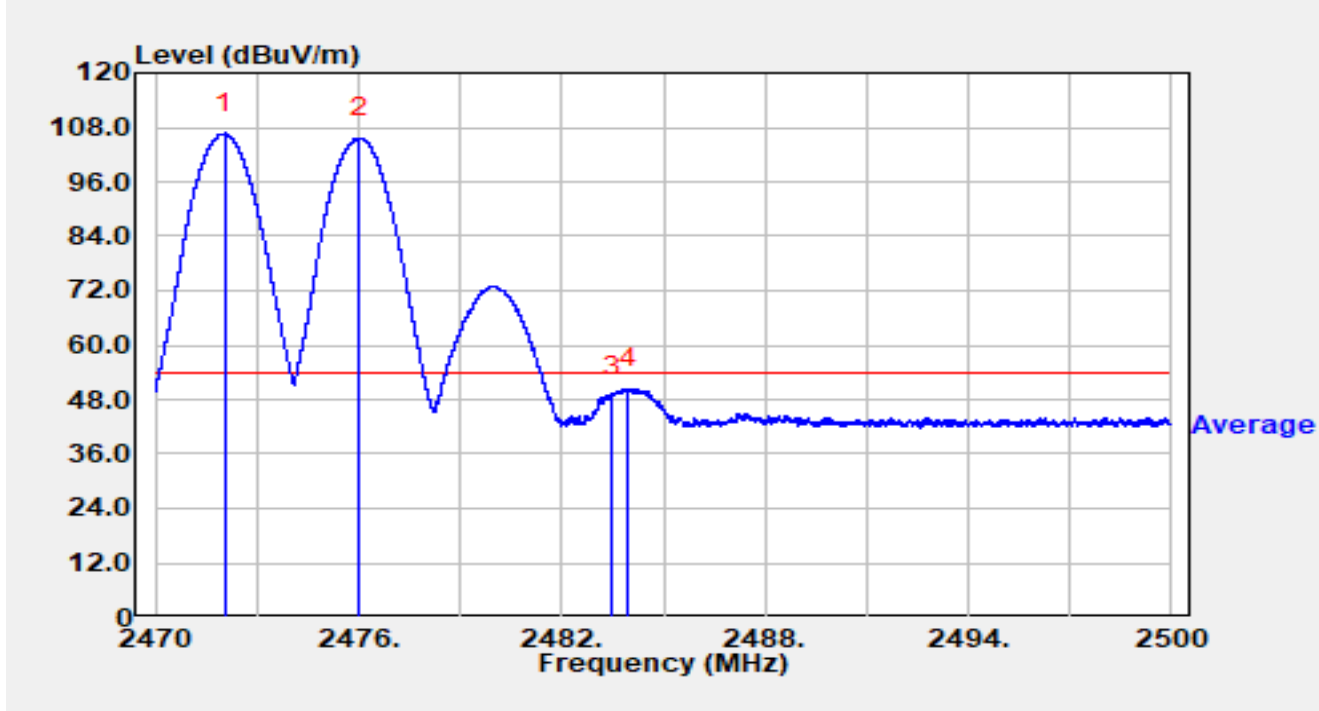


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2472.040        | 76.93          | 29.73      | 106.66               | N/A         | N/A            | Average  |
| 2  |      | 2476.036        | 75.93          | 29.74      | 105.67               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 19.04          | 29.76      | 48.80                | -5.20       | 54.00          | Average  |
| 4  | *    | 2483.953        | 20.59          | 29.77      | 50.35                | -3.65       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2476MHz |               |            |

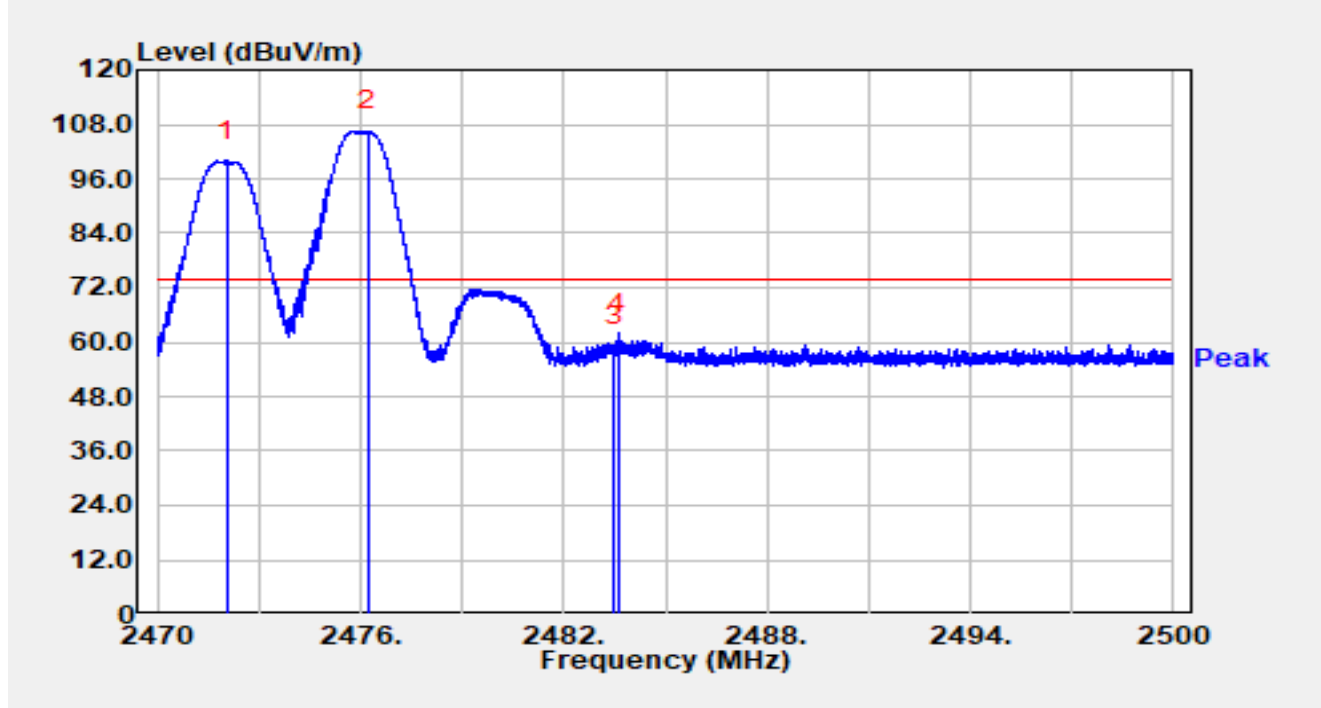


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2472.058        | 70.19          | 29.73      | 99.92                | N/A         | N/A            | Peak     |
| 2  |      | 2476.207        | 76.73          | 29.74      | 106.46               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 29.22          | 29.76      | 58.98                | -15.02      | 74.00          | Peak     |
| 4  | *    | 2483.608        | 32.08          | 29.76      | 61.84                | -12.16      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2476MHz |               |            |

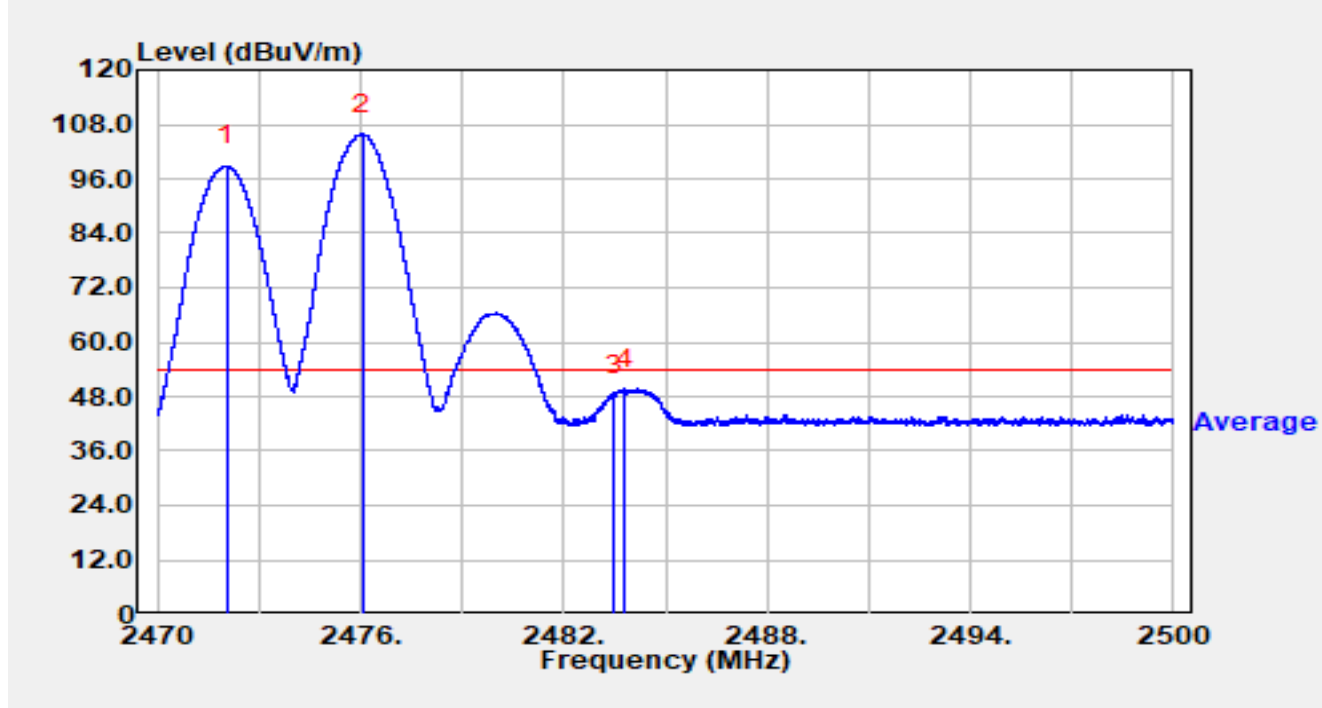


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2472.052        | 69.19          | 29.73      | 98.92                | N/A         | N/A            | Average  |
| 2  |      | 2476.063        | 76.06          | 29.74      | 105.80               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 18.64          | 29.76      | 48.40                | -5.60       | 54.00          | Average  |
| 4  | *    | 2483.815        | 20.02          | 29.77      | 49.78                | -4.22       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2474MHz Core1 2476MHz |               |            |

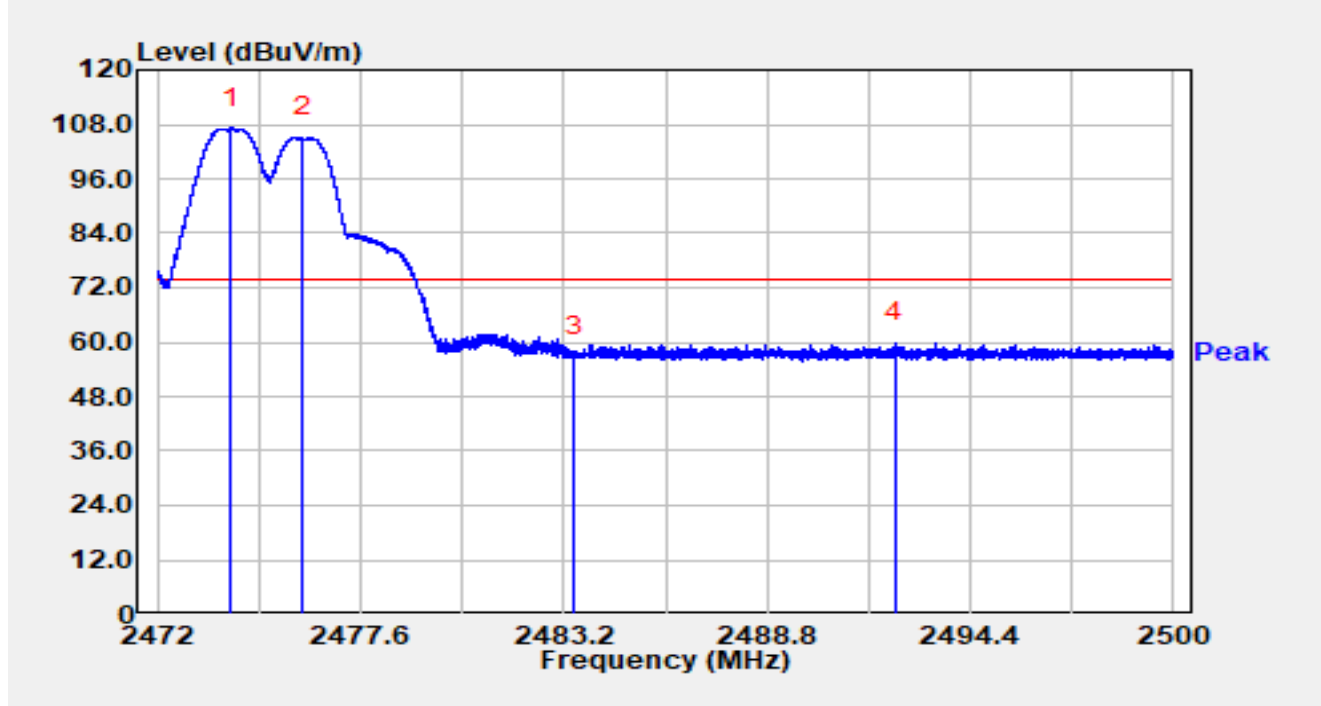


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2474.041        | 77.46          | 29.73      | 107.19               | N/A         | N/A            | Peak     |
| 2  |      | 2476.010        | 75.32          | 29.74      | 105.06               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 27.01          | 29.76      | 56.77                | -17.23      | 74.00          | Peak     |
| 4  | *    | 2492.323        | 30.05          | 29.79      | 59.84                | -14.16      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2474MHz Core1 2476MHz |               |            |

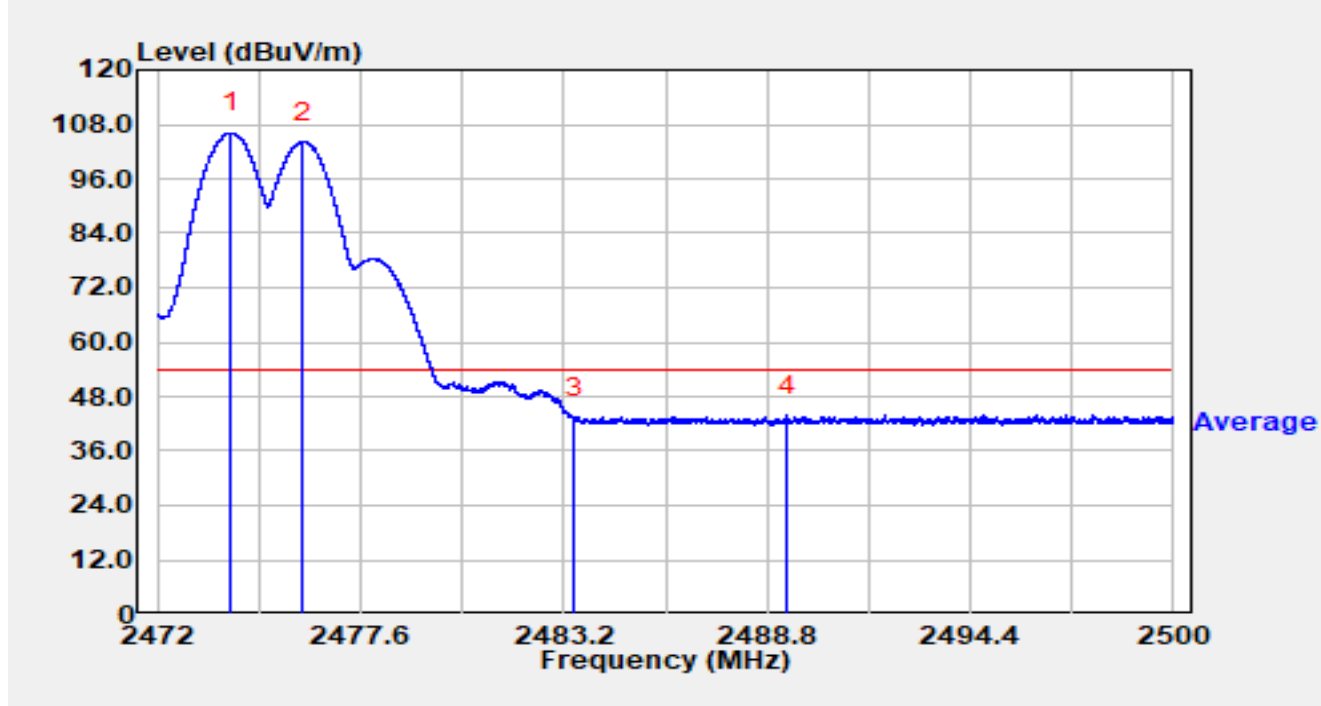


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2474.041        | 76.41          | 29.73      | 106.14               | N/A         | N/A            | Average  |
| 2  |      | 2476.018        | 74.39          | 29.74      | 104.13               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 13.63          | 29.76      | 43.40                | -10.60      | 54.00          | Average  |
| 4  | *    | 2489.346        | 14.09          | 29.78      | 43.88                | -10.12      | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2474MHz Core1 2476MHz |               |            |

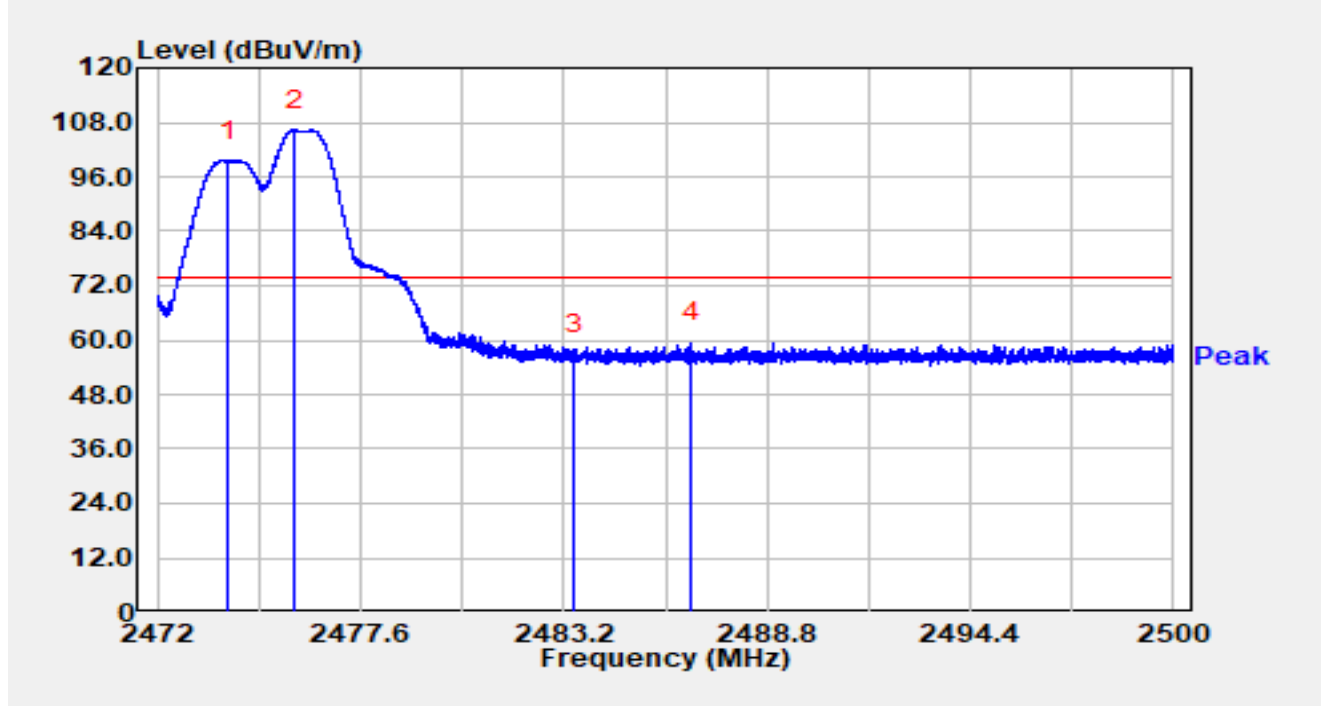


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2473.957        | 69.86          | 29.73      | 99.59                | N/A         | N/A            | Peak     |
| 2  |      | 2475.783        | 76.51          | 29.74      | 106.25               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 27.11          | 29.76      | 56.87                | -17.13      | 74.00          | Peak     |
| 4  | *    | 2486.703        | 29.73          | 29.78      | 59.51                | -14.49      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2474MHz Core1 2476MHz |               |            |

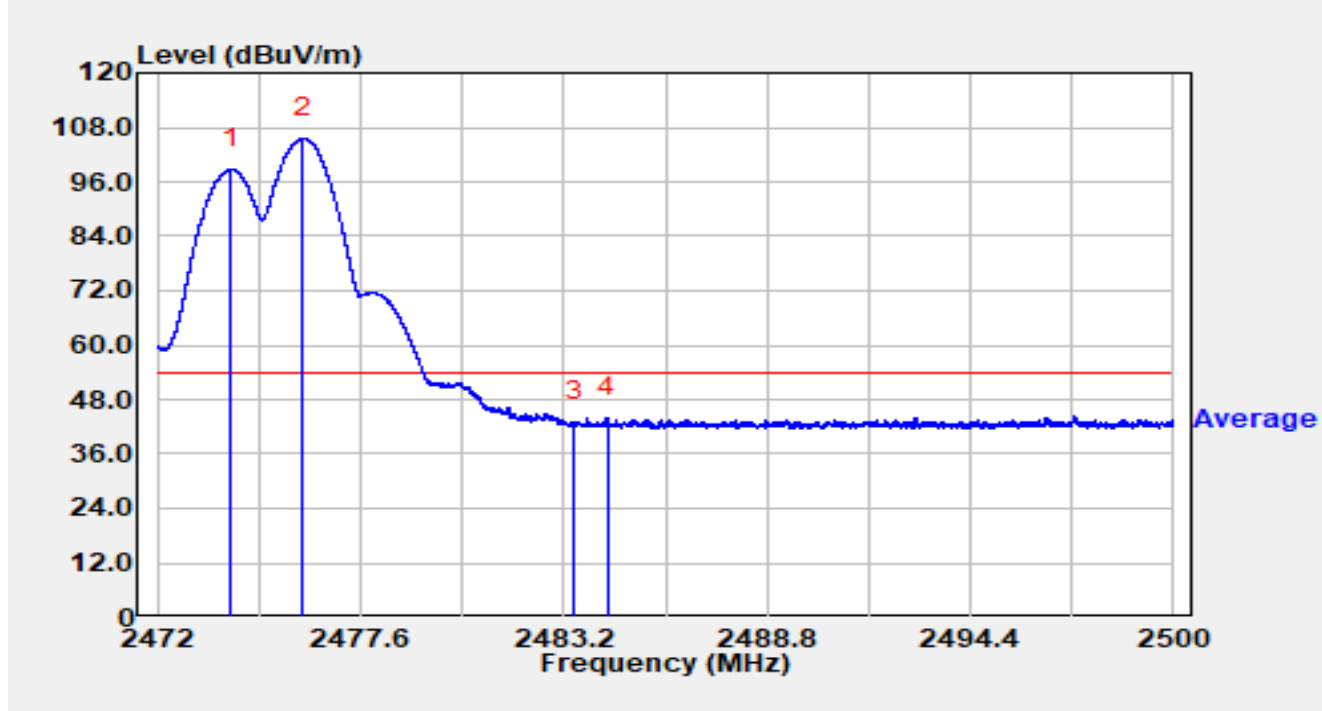


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2474.033        | 69.03          | 29.73      | 98.77                | N/A         | N/A            | Average  |
| 2  |      | 2476.024        | 75.91          | 29.74      | 105.65               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 13.31          | 29.76      | 43.07                | -10.93      | 54.00          | Average  |
| 4  | *    | 2484.387        | 14.32          | 29.77      | 44.09                | -9.91       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2478MHz |               |            |

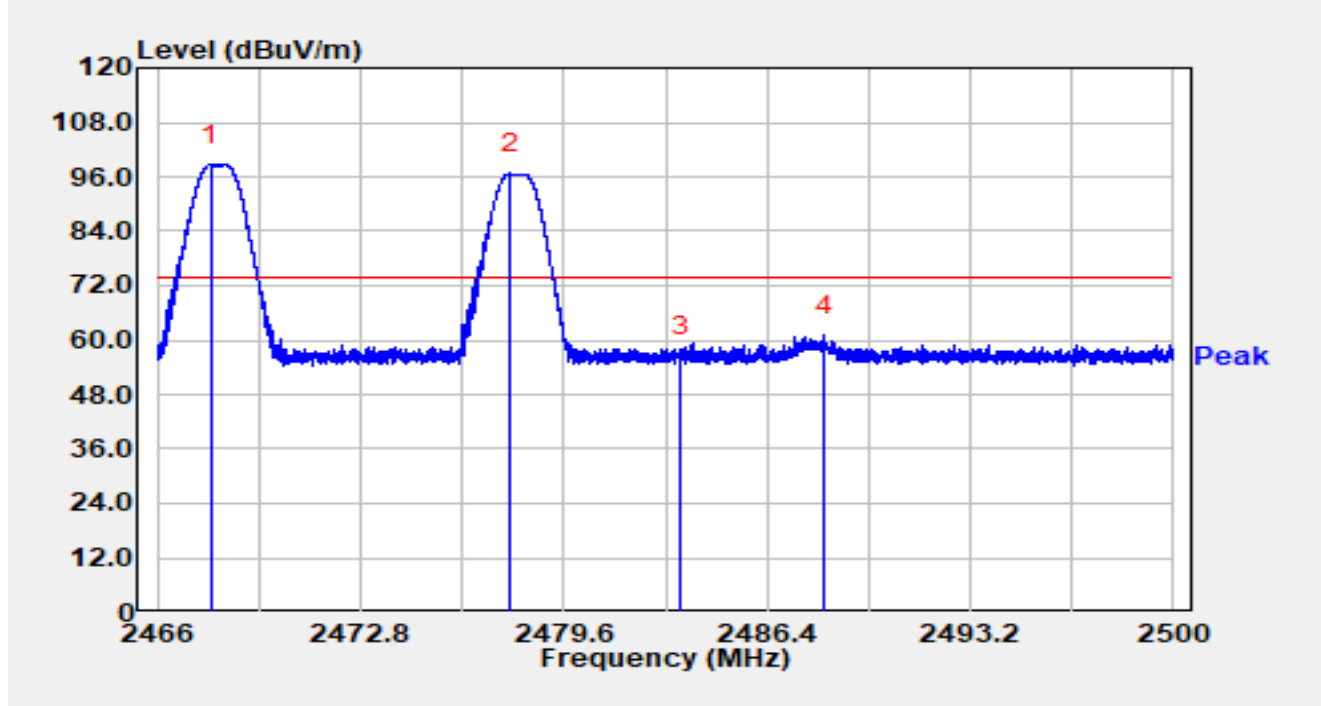


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2467.788        | 69.00          | 29.72      | 98.72                | N/A         | N/A            | Peak     |
| 2  |      | 2477.791        | 66.99          | 29.74      | 96.74                | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 26.64          | 29.76      | 56.40                | -17.60      | 74.00          | Peak     |
| 4  | *    | 2488.328        | 31.21          | 29.78      | 60.99                | -13.01      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2478MHz |               |            |

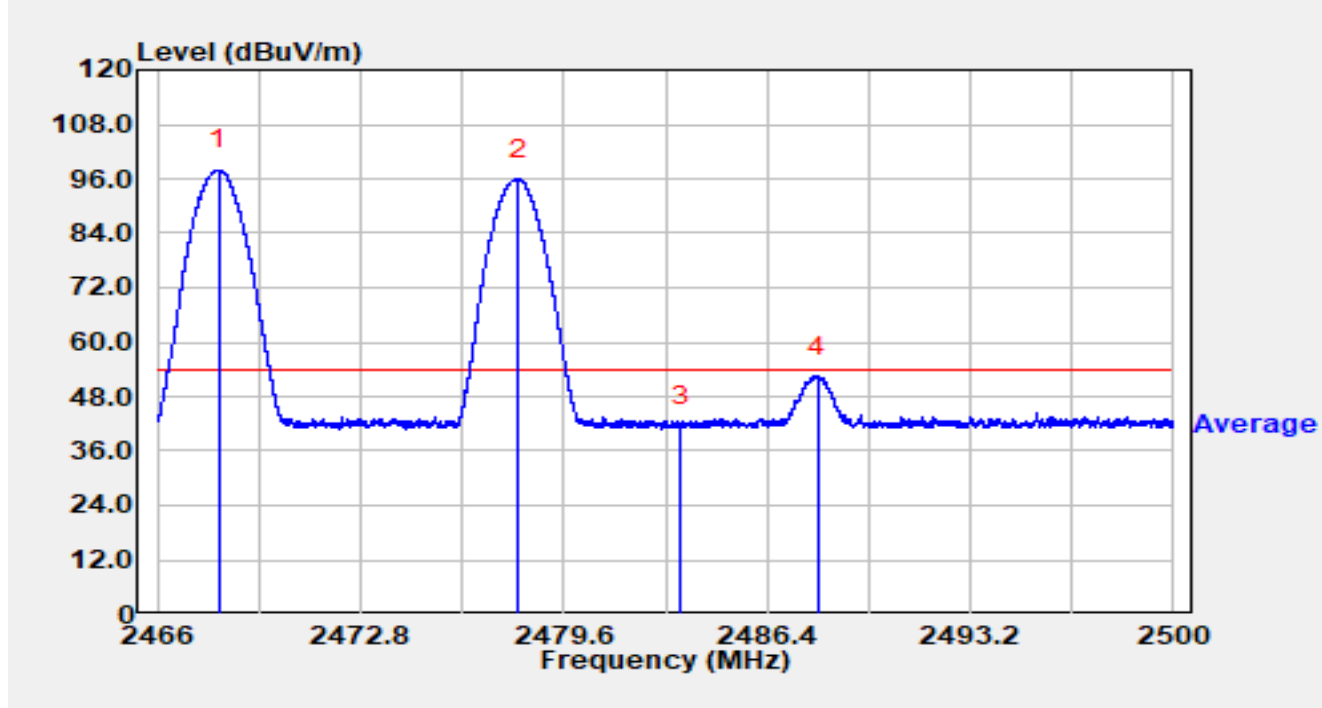


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.050        | 68.23          | 29.72      | 97.95                | N/A         | N/A            | Average  |
| 2  |      | 2478.073        | 66.21          | 29.75      | 95.96                | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 11.86          | 29.76      | 41.63                | -12.37      | 54.00          | Average  |
| 4  | *    | 2488.107        | 22.74          | 29.78      | 52.52                | -1.48       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2478MHz |               |            |

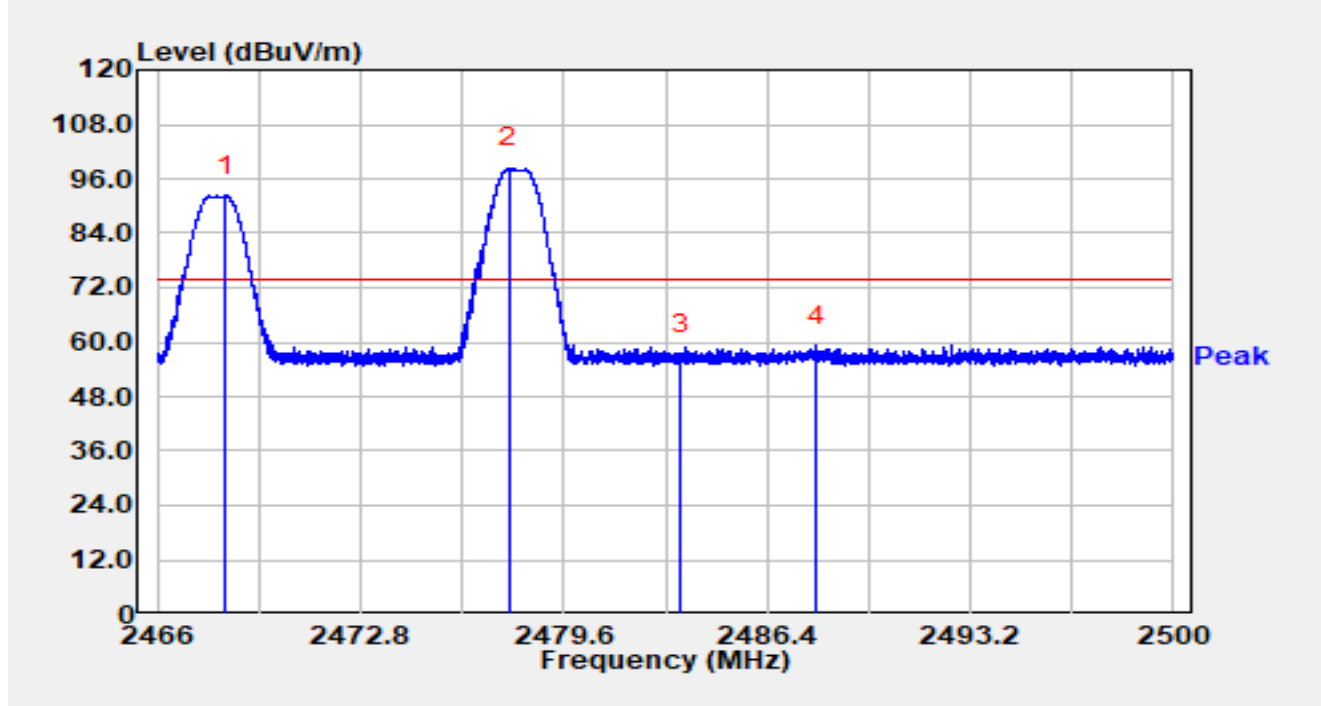


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.264        | 62.46          | 29.72      | 92.18                | N/A         | N/A            | Peak     |
| 2  |      | 2477.788        | 68.54          | 29.74      | 98.29                | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 27.36          | 29.76      | 57.12                | -16.88      | 74.00          | Peak     |
| 4  | *    | 2488.073        | 29.36          | 29.78      | 59.14                | -14.86      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2478MHz |               |            |

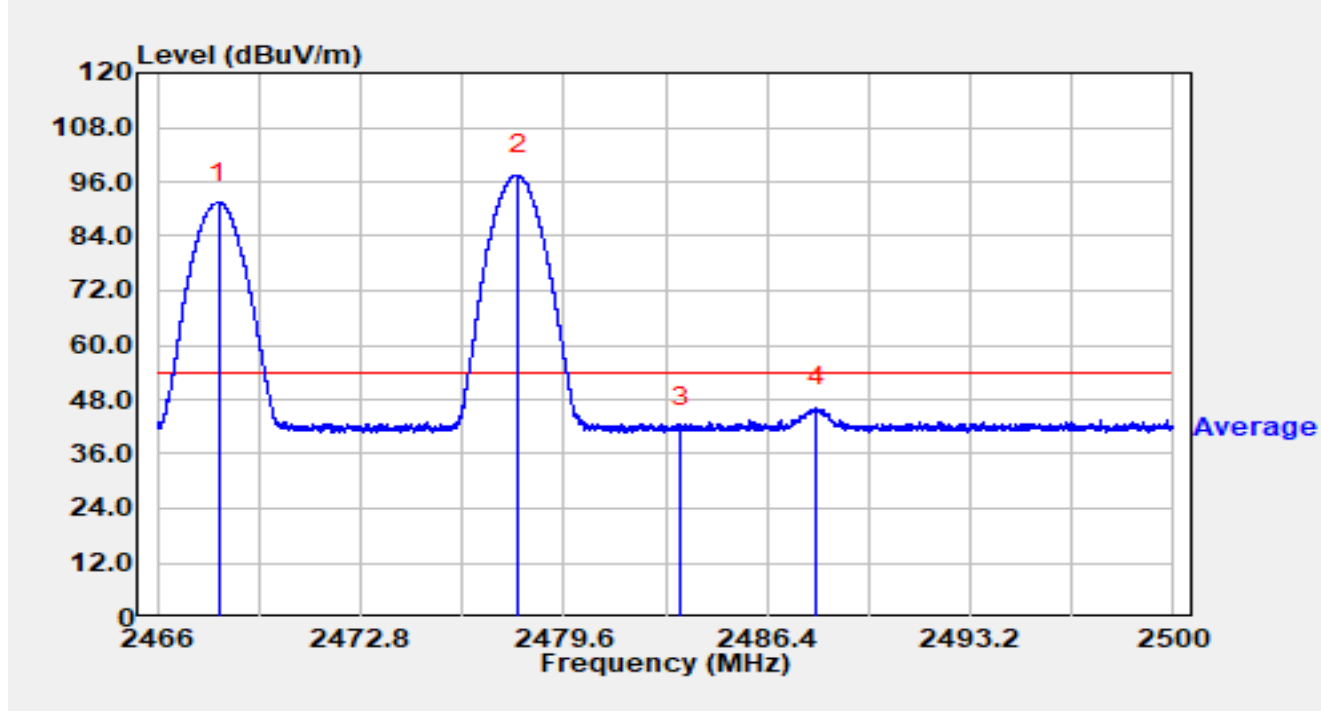


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.037        | 61.75          | 29.72      | 91.47                | N/A         | N/A            | Average  |
| 2  |      | 2478.083        | 67.67          | 29.75      | 97.42                | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.00          | 29.76      | 41.76                | -12.24      | 54.00          | Average  |
| 4  | *    | 2488.046        | 16.41          | 29.78      | 46.19                | -7.81       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2478MHz |               |            |

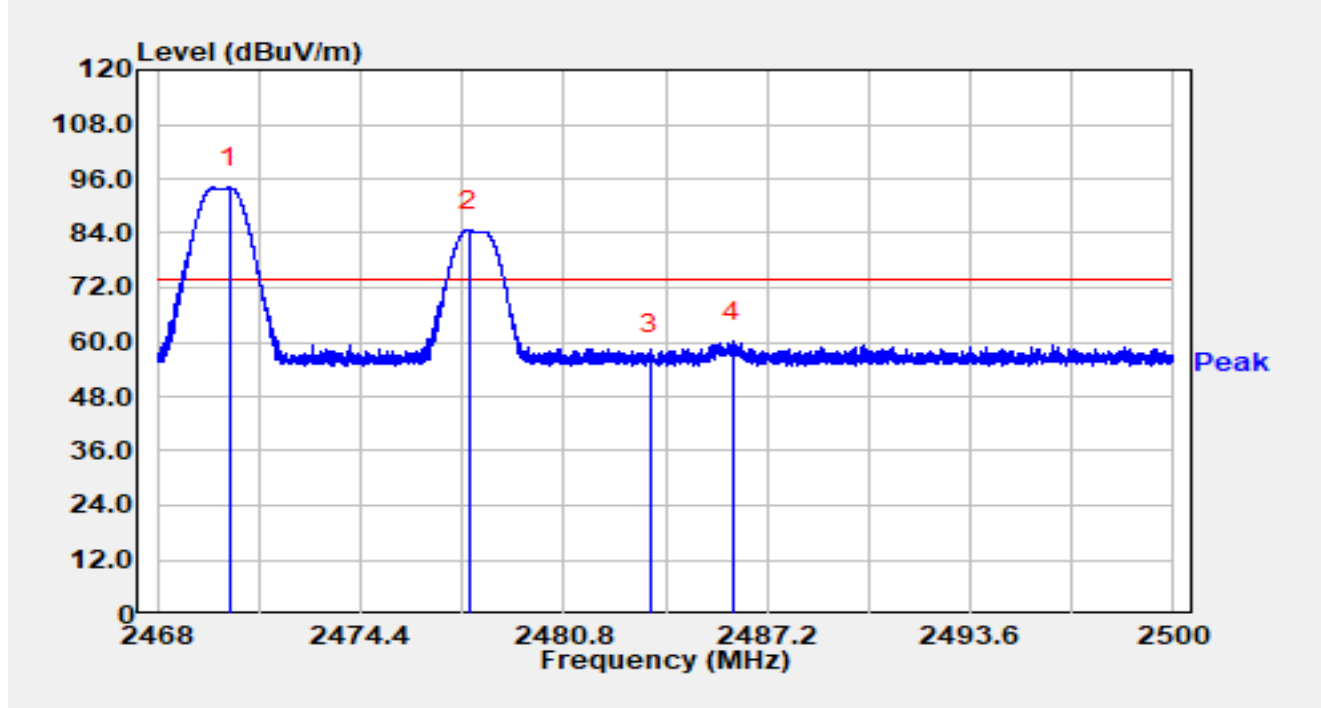


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2470.269        | 64.36          | 29.72      | 94.09                | N/A         | N/A            | Peak     |
| 2  |      | 2477.814        | 54.91          | 29.74      | 84.65                | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 27.58          | 29.76      | 57.35                | -16.65      | 74.00          | Peak     |
| 4  | *    | 2486.122        | 30.40          | 29.77      | 60.17                | -13.83      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2478MHz |               |            |

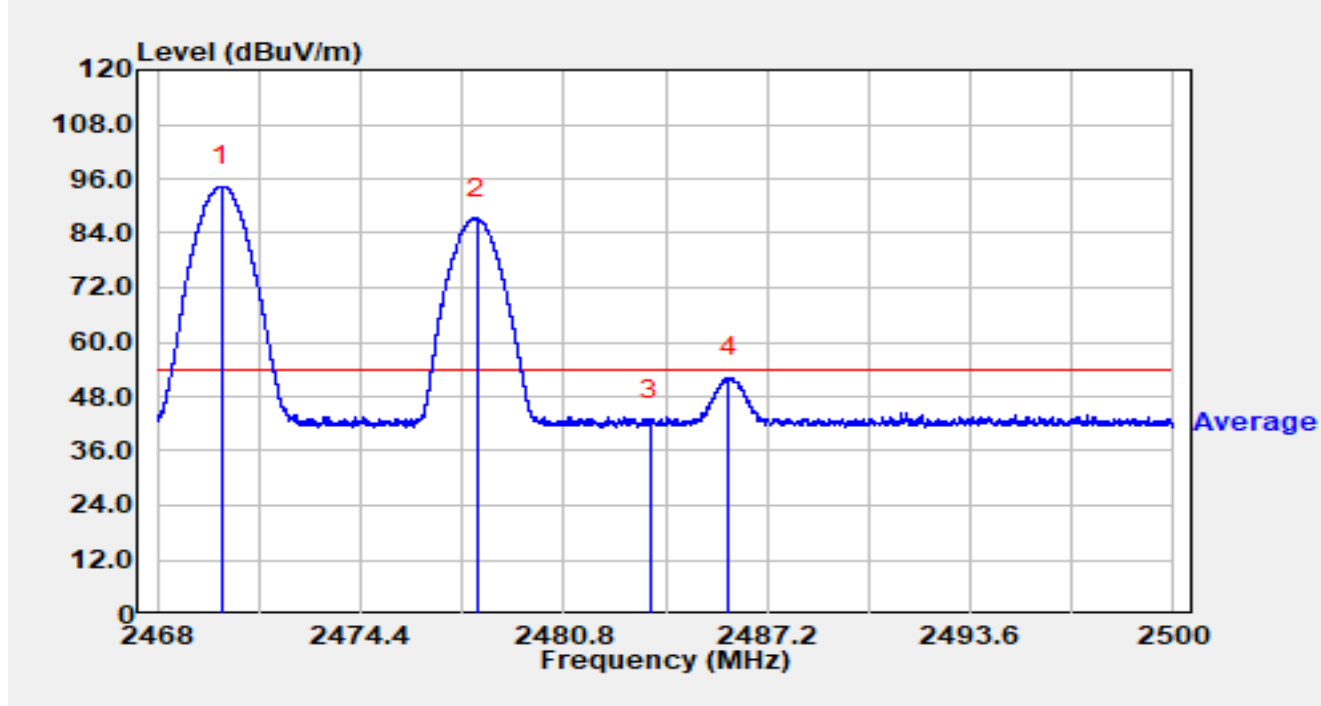


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2470.010        | 64.62          | 29.72      | 94.34                | N/A         | N/A            | Average  |
| 2  |      | 2478.064        | 57.53          | 29.75      | 87.28                | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 13.07          | 29.76      | 42.84                | -11.16      | 54.00          | Average  |
| 4  | *    | 2486.010        | 22.38          | 29.77      | 52.16                | -1.84       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2478MHz |               |            |

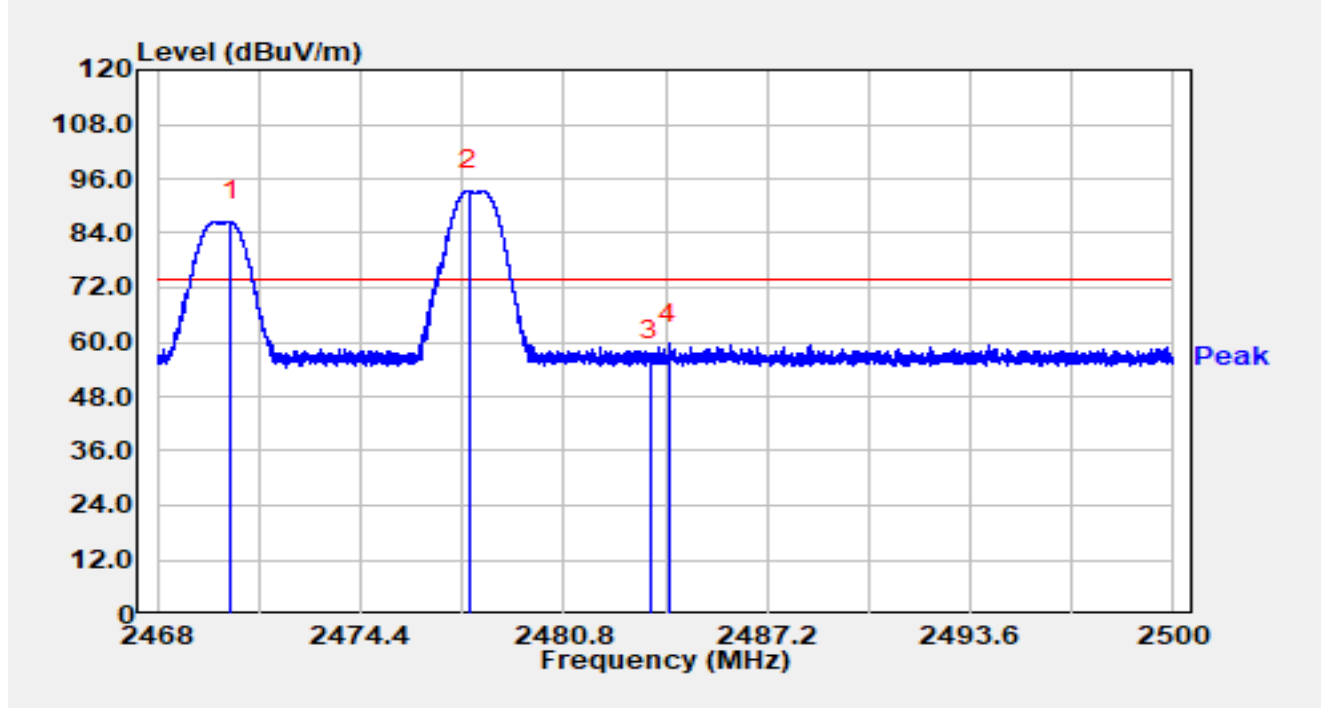


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2470.310        | 56.84          | 29.72      | 86.57                | N/A         | N/A            | Peak     |
| 2  |      | 2477.818        | 63.58          | 29.74      | 93.33                | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 25.99          | 29.76      | 55.75                | -18.25      | 74.00          | Peak     |
| 4  | *    | 2484.125        | 29.89          | 29.77      | 59.66                | -14.34      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2478MHz |               |            |

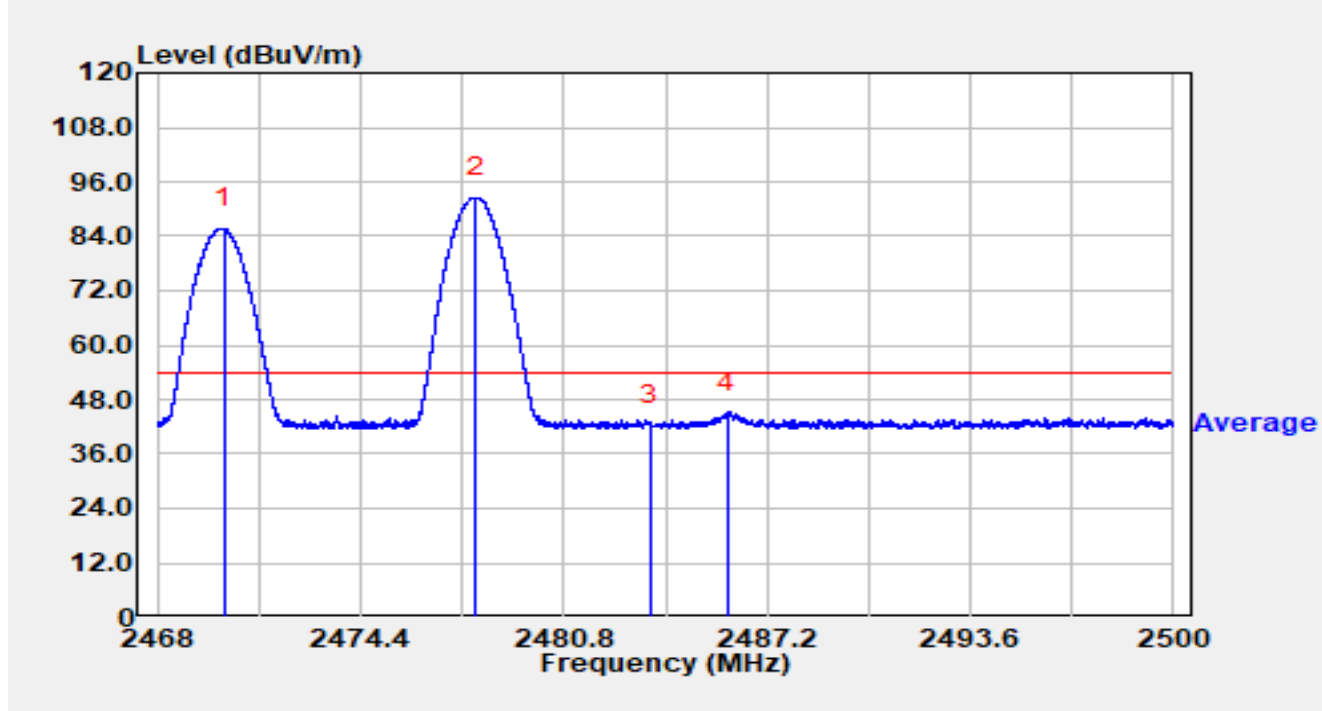


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2470.086        | 56.04          | 29.72      | 85.76                | N/A         | N/A            | Average  |
| 2  |      | 2478.010        | 62.84          | 29.74      | 92.59                | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.51          | 29.76      | 42.28                | -11.72      | 54.00          | Average  |
| 4  | *    | 2485.968        | 15.44          | 29.77      | 45.21                | -8.79       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2478MHz |               |            |

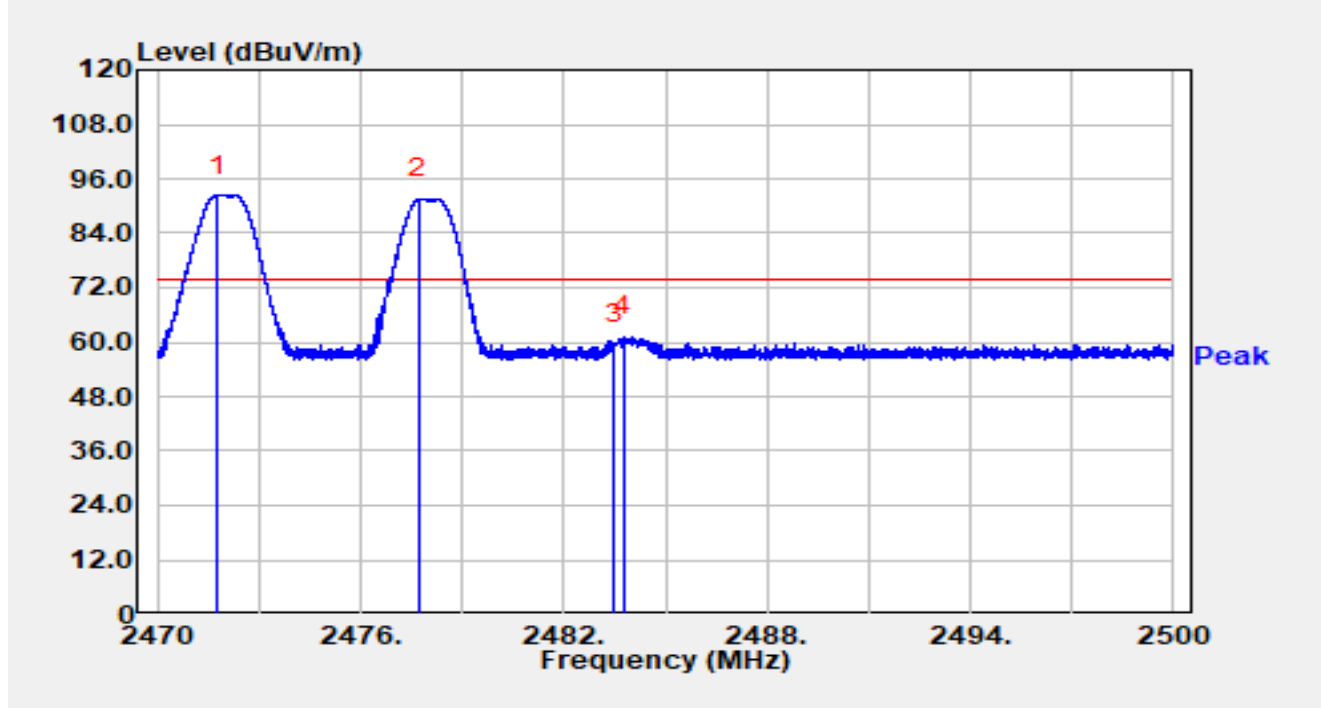


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2471.770        | 62.63          | 29.73      | 92.35                | N/A         | N/A            | Peak     |
| 2  |      | 2477.710        | 61.84          | 29.74      | 91.58                | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 29.72          | 29.76      | 59.48                | -14.52      | 74.00          | Peak     |
| 4  | *    | 2483.773        | 31.57          | 29.76      | 61.34                | -12.66      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2478MHz |               |            |

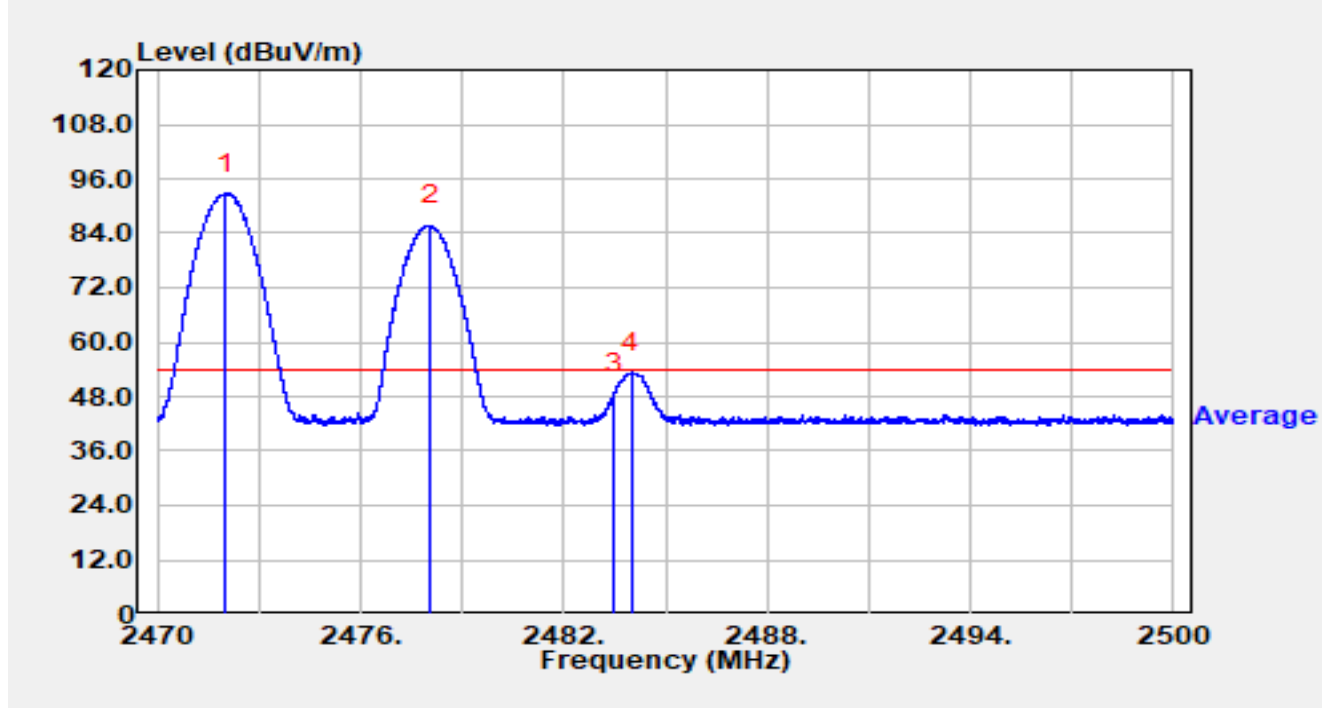


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2472.031        | 63.04          | 29.73      | 92.76                | N/A         | N/A            | Average  |
| 2  |      | 2478.064        | 55.85          | 29.75      | 85.59                | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 18.90          | 29.76      | 48.66                | -5.34       | 54.00          | Average  |
| 4  | *    | 2484.016        | 23.55          | 29.77      | 53.31                | -0.69       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2478MHz |               |            |

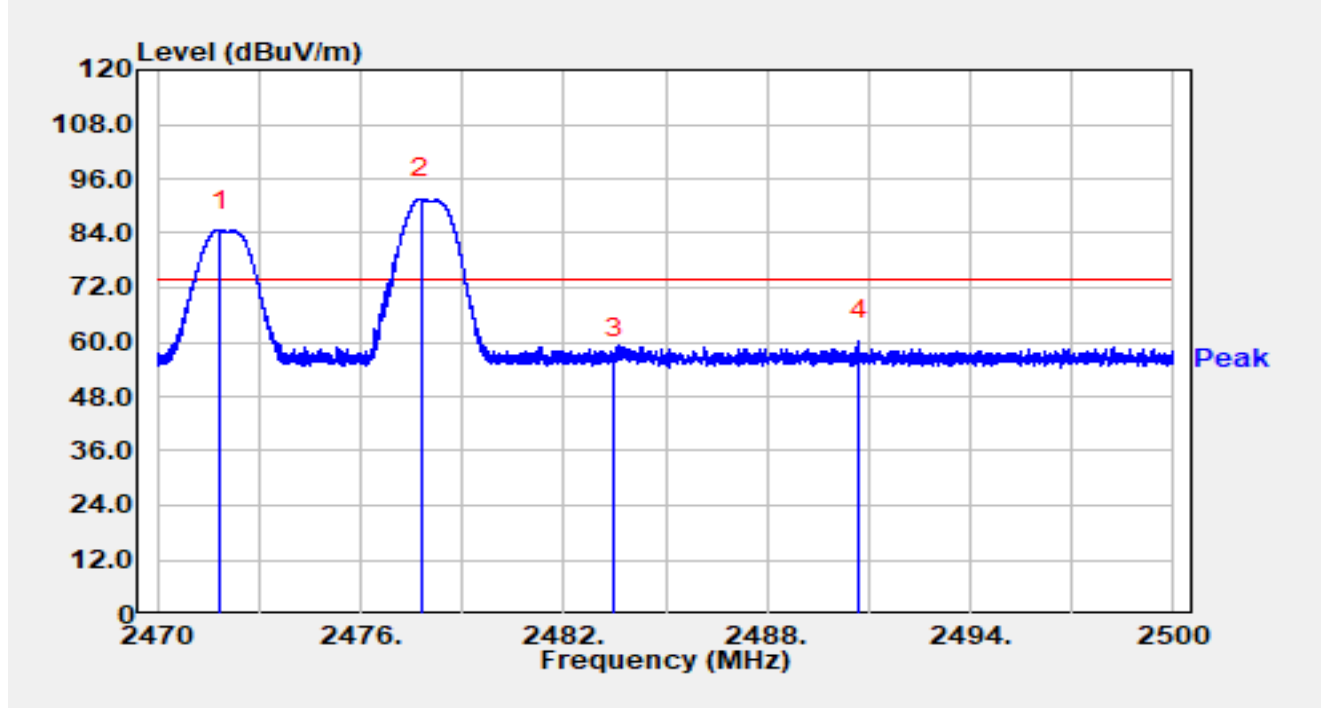


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2471.845        | 54.88          | 29.73      | 84.61                | N/A         | N/A            | Peak     |
| 2  |      | 2477.797        | 61.80          | 29.74      | 91.55                | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 26.55          | 29.76      | 56.32                | -17.68      | 74.00          | Peak     |
| 4  | *    | 2490.718        | 30.50          | 29.79      | 60.29                | -13.71      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2478MHz |               |            |

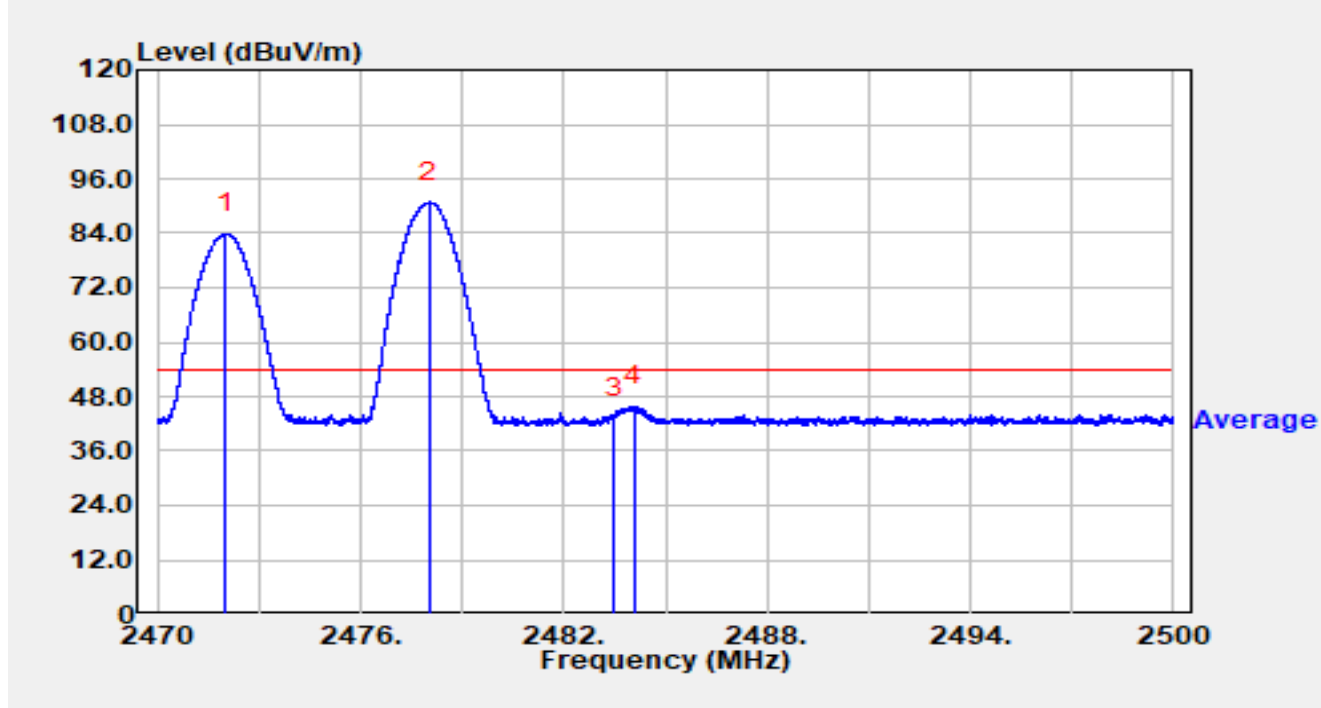


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2472.028        | 54.12          | 29.73      | 83.85                | N/A         | N/A            | Average  |
| 2  |      | 2478.028        | 61.06          | 29.74      | 90.80                | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 13.60          | 29.76      | 43.37                | -10.63      | 54.00          | Average  |
| 4  | *    | 2484.082        | 16.09          | 29.77      | 45.86                | -8.14       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2474MHz Core1 2478MHz |               |            |

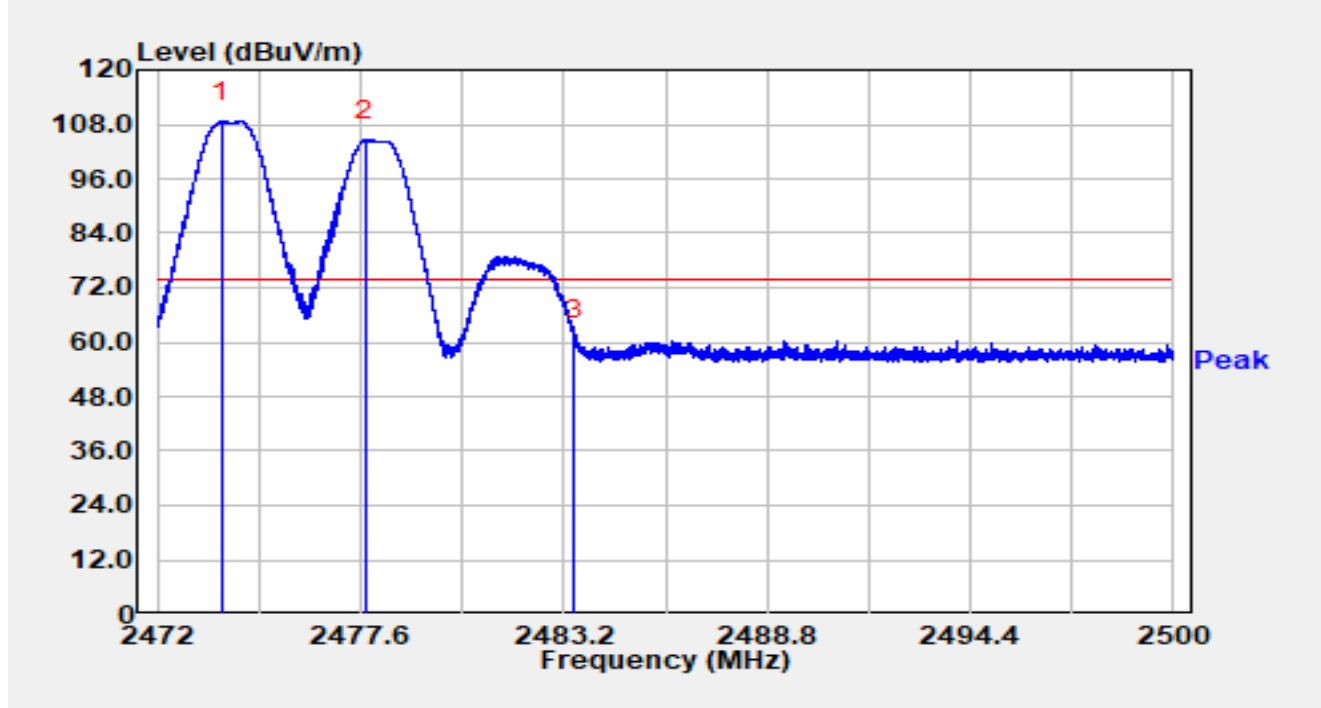


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2473.781        | 78.91          | 29.73      | 108.64               | N/A         | N/A            | Peak     |
| 2  |      | 2477.746        | 74.76          | 29.74      | 104.51               | N/A         | N/A            | Peak     |
| 3  | *    | 2483.500        | 30.51          | 29.76      | 60.27                | -13.73      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2474MHz Core1 2478MHz |               |            |

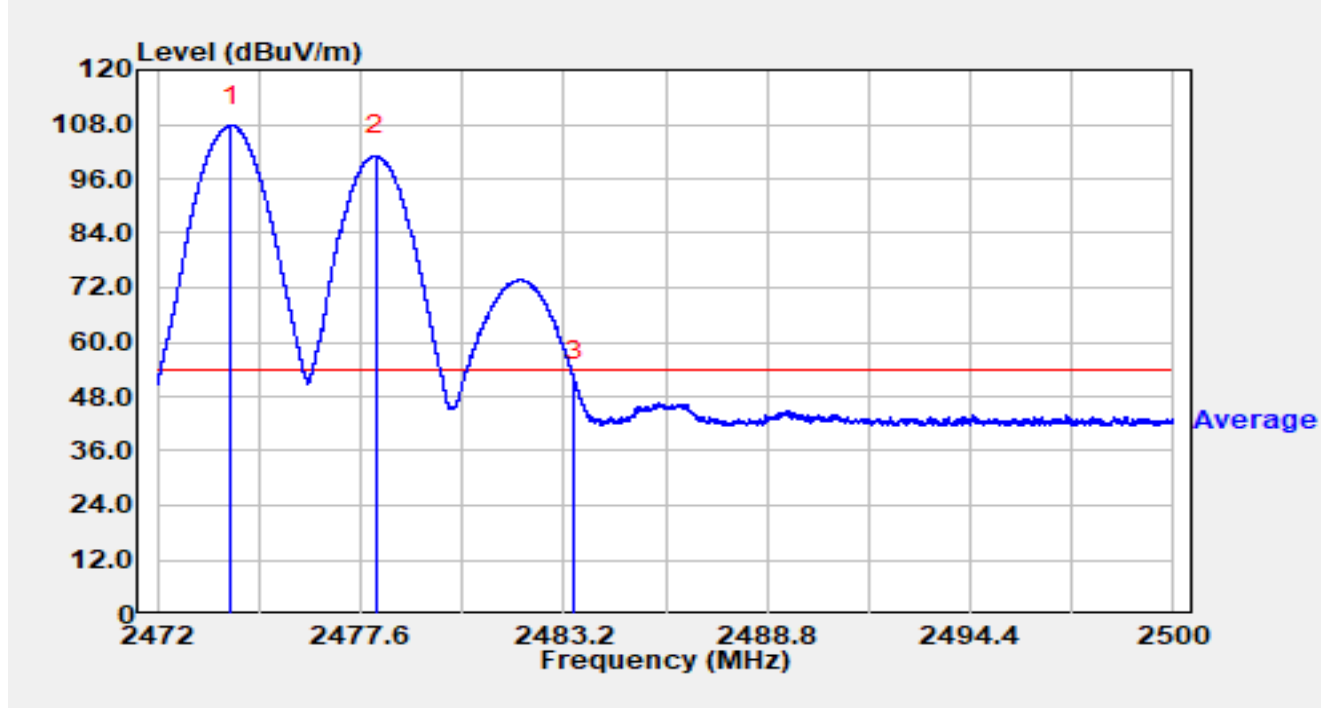


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2474.030        | 78.00          | 29.73      | 107.73               | N/A         | N/A            | Average  |
| 2  |      | 2478.006        | 71.39          | 29.74      | 101.14               | N/A         | N/A            | Average  |
| 3  | *    | 2483.500        | 21.61          | 29.76      | 51.37                | -2.63       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2474MHz Core1 2478MHz |               |            |

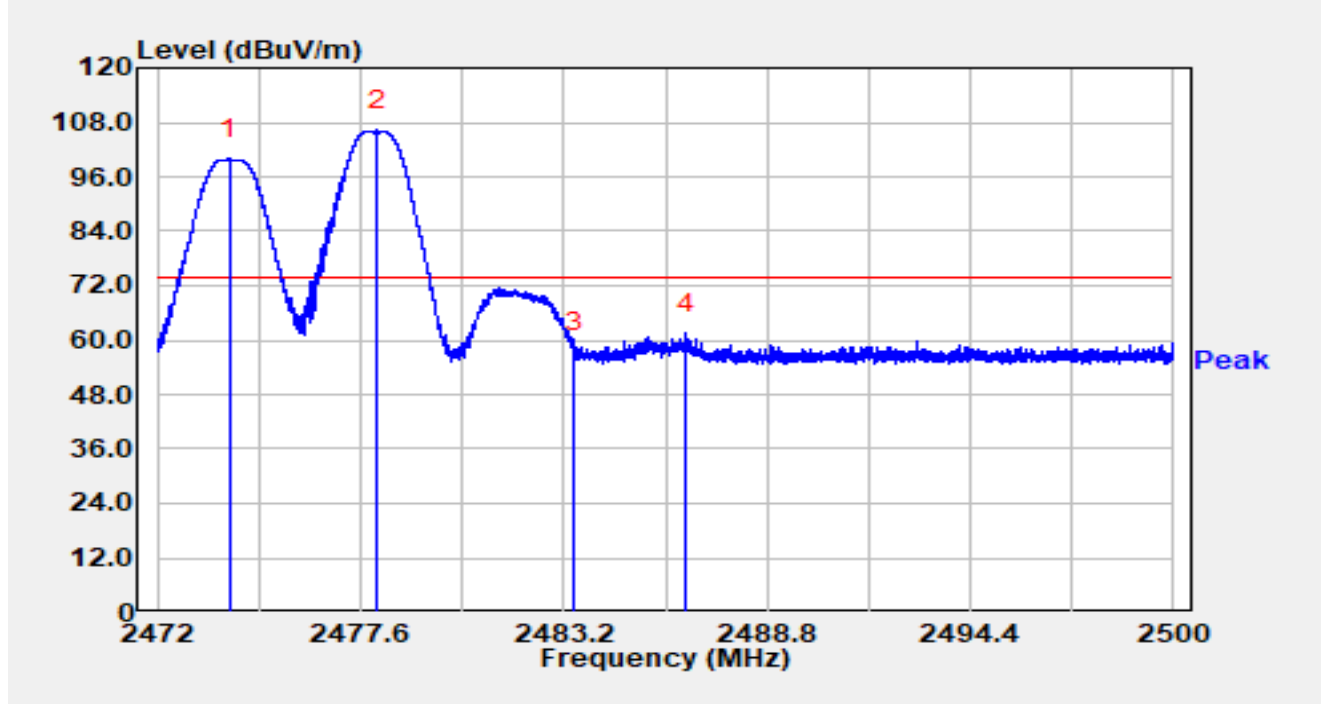


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2474.002        | 70.23          | 29.73      | 99.96                | N/A         | N/A            | Peak     |
| 2  |      | 2478.045        | 76.45          | 29.75      | 106.19               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 27.48          | 29.76      | 57.25                | -16.75      | 74.00          | Peak     |
| 4  | *    | 2486.568        | 31.68          | 29.77      | 61.45                | -12.55      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2474MHz Core1 2478MHz |               |            |

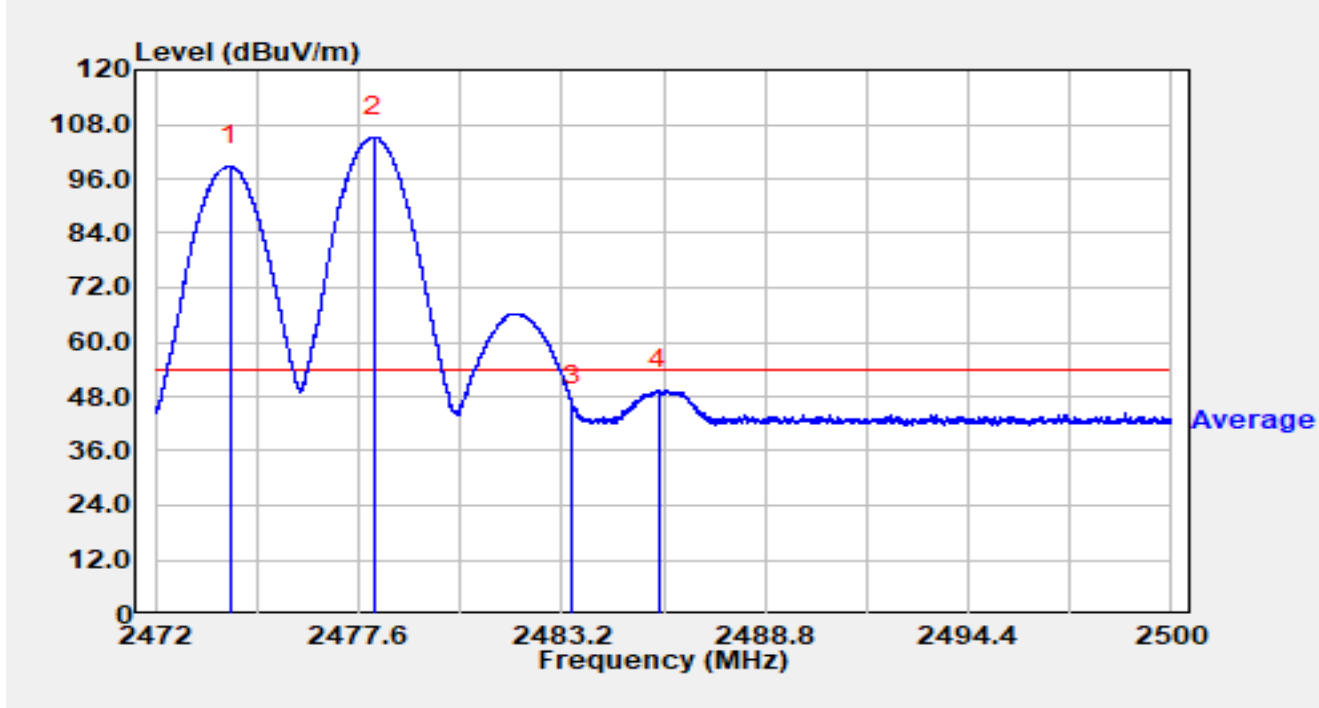


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2474.072        | 69.16          | 29.73      | 98.89                | N/A         | N/A            | Average  |
| 2  |      | 2478.009        | 75.51          | 29.74      | 105.25               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 16.23          | 29.76      | 46.00                | -8.00       | 54.00          | Average  |
| 4  | *    | 2485.880        | 19.67          | 29.77      | 49.44                | -4.56       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2476MHz Core1 2478MHz |               |            |

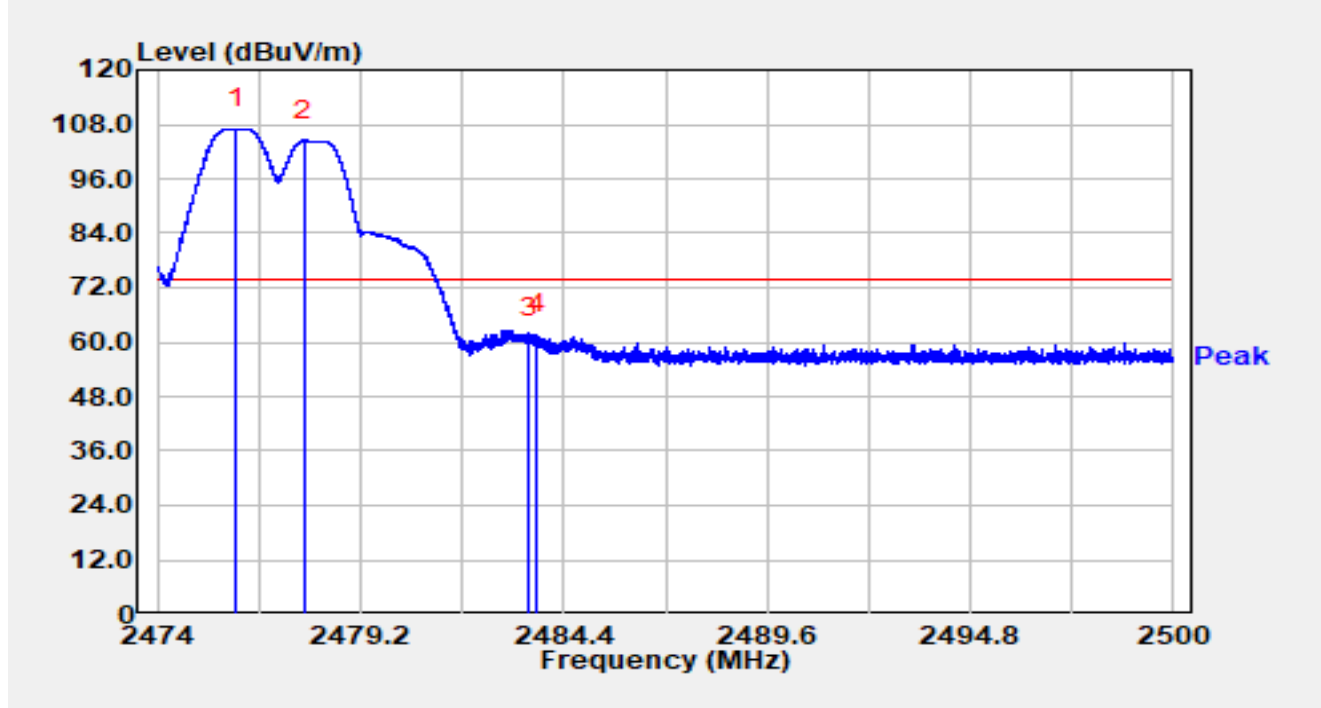


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2476.030        | 77.33          | 29.74      | 107.07               | N/A         | N/A            | Peak     |
| 2  |      | 2477.745        | 74.81          | 29.74      | 104.55               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 31.21          | 29.76      | 60.97                | -13.03      | 74.00          | Peak     |
| 4  | *    | 2483.705        | 31.90          | 29.76      | 61.67                | -12.33      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2476MHz Core1 2478MHz |               |            |

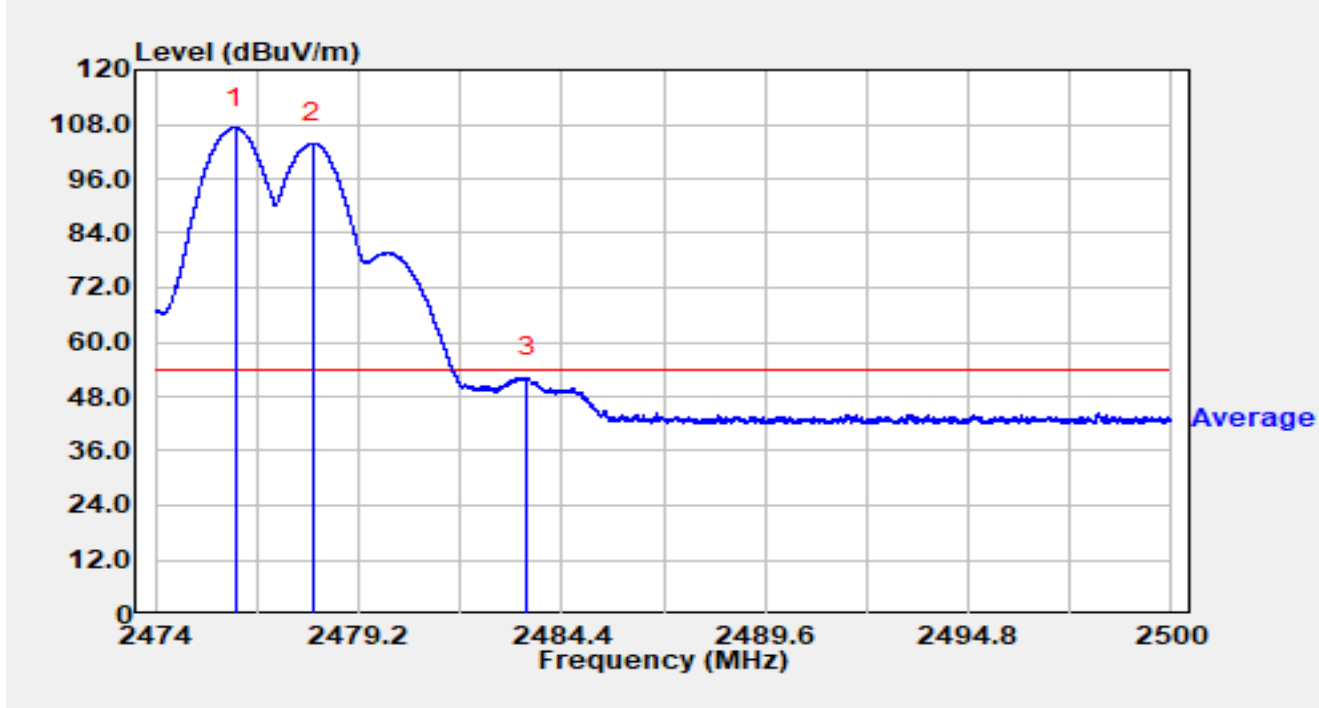


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2476.067        | 77.50          | 29.74      | 107.23               | N/A         | N/A            | Average  |
| 2  |      | 2478.027        | 74.01          | 29.74      | 103.76               | N/A         | N/A            | Average  |
| 3  | *    | 2483.500        | 22.33          | 29.76      | 52.10                | -1.90       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2476MHz Core1 2478MHz |               |            |

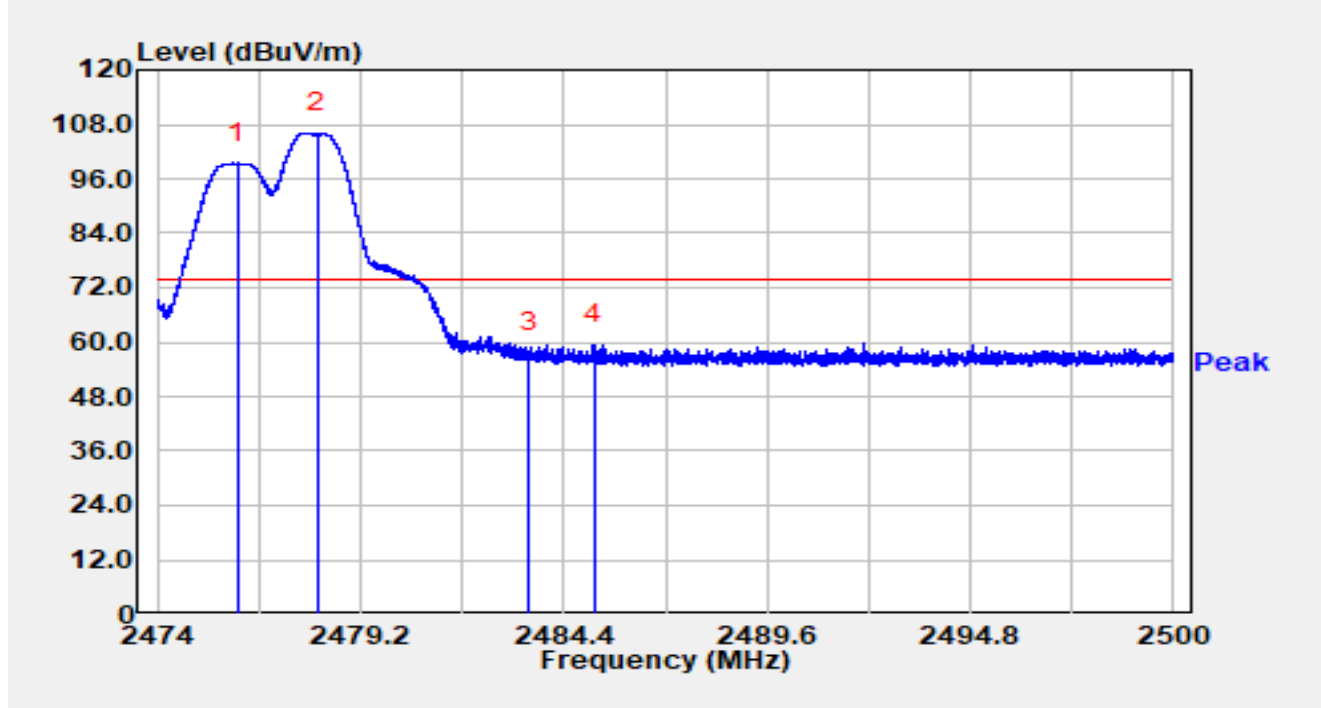


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2476.064        | 69.81          | 29.74      | 99.55                | N/A         | N/A            | Peak     |
| 2  |      | 2478.085        | 76.42          | 29.75      | 106.16               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 27.78          | 29.76      | 57.55                | -16.45      | 74.00          | Peak     |
| 4  | *    | 2485.164        | 29.72          | 29.77      | 59.49                | -14.51      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2476MHz Core1 2478MHz |               |            |

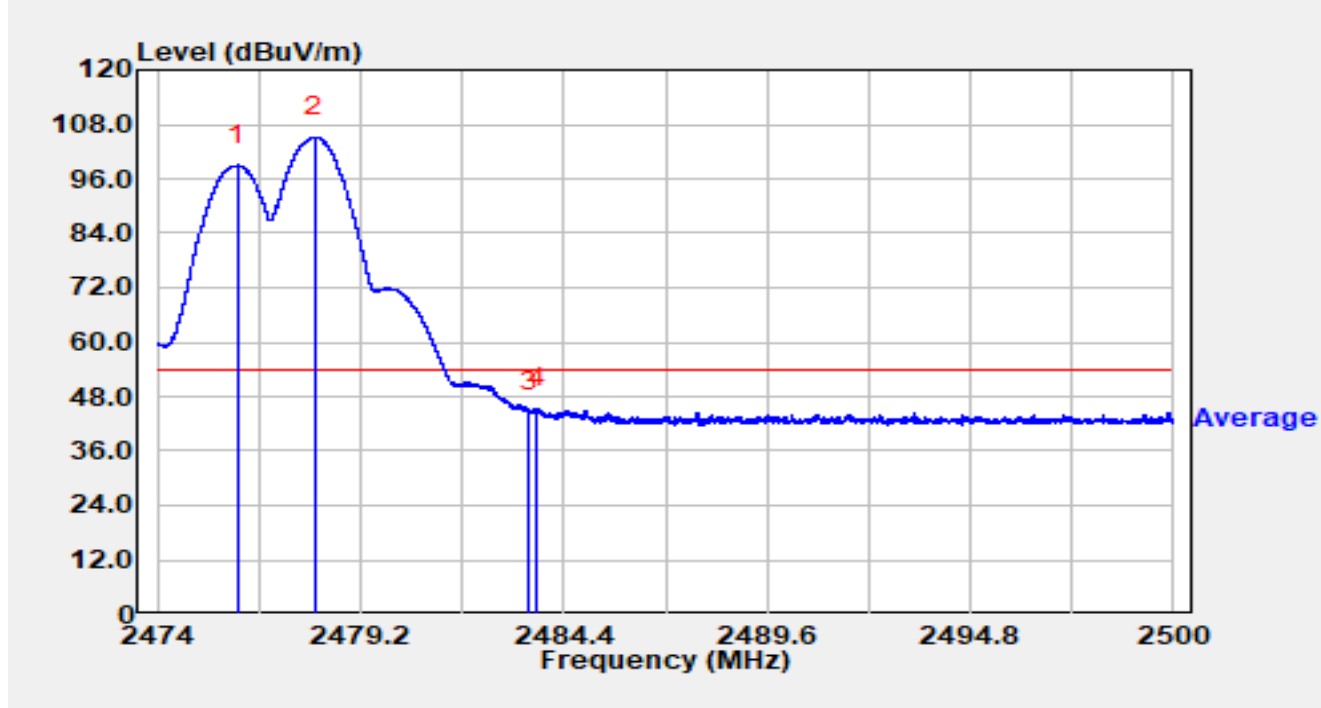


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2476.051        | 69.24          | 29.74      | 98.97                | N/A         | N/A            | Average  |
| 2  |      | 2478.027        | 75.54          | 29.74      | 105.28               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 15.04          | 29.76      | 44.81                | -9.19       | 54.00          | Average  |
| 4  | *    | 2483.716        | 15.59          | 29.76      | 45.35                | -8.65       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2480MHz |               |            |

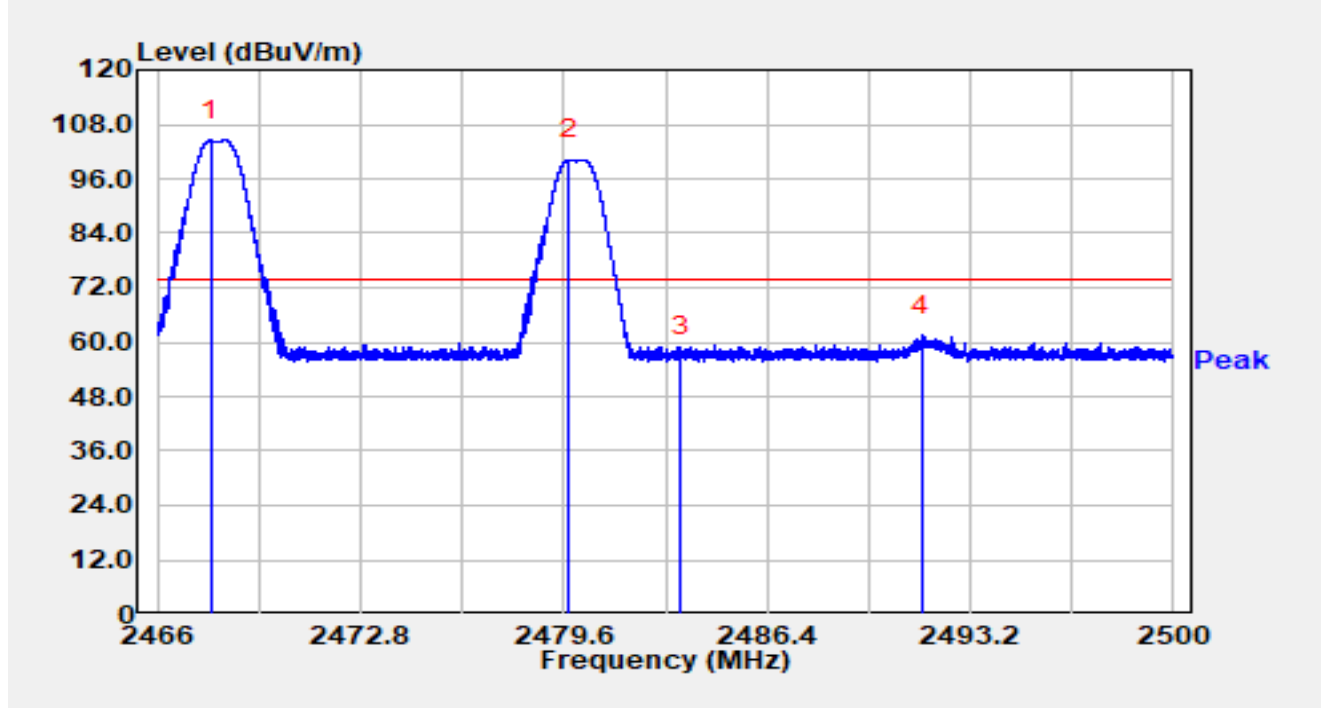


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2467.771        | 74.72          | 29.72      | 104.44               | N/A         | N/A            | Peak     |
| 2  |      | 2479.773        | 70.54          | 29.75      | 100.29               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 26.97          | 29.76      | 56.74                | -17.26      | 74.00          | Peak     |
| 4  | *    | 2491.578        | 31.67          | 29.79      | 61.46                | -12.54      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2480MHz |               |            |

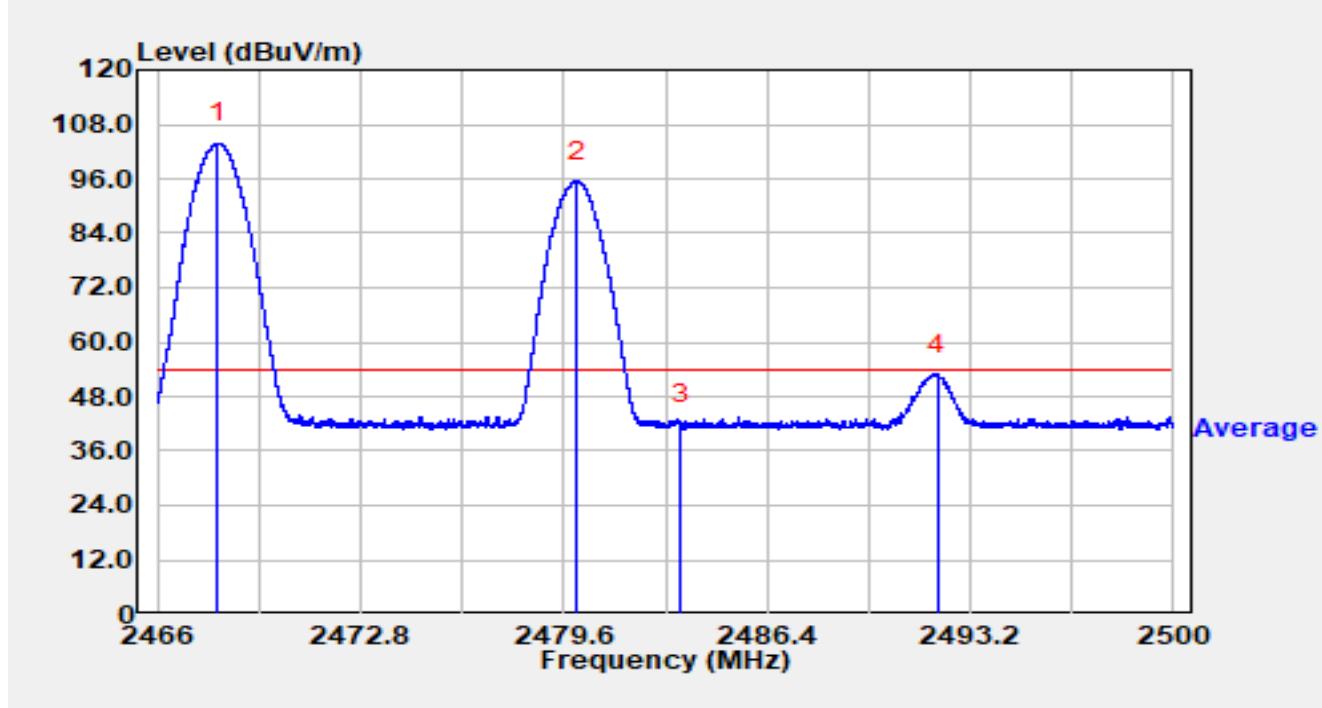


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.010        | 74.04          | 29.72      | 103.76               | N/A         | N/A            | Average  |
| 2  |      | 2480.042        | 65.70          | 29.75      | 95.45                | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.07          | 29.76      | 41.84                | -12.16      | 54.00          | Average  |
| 4  | *    | 2492.095        | 23.12          | 29.79      | 52.92                | -1.08       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2480MHz |               |            |

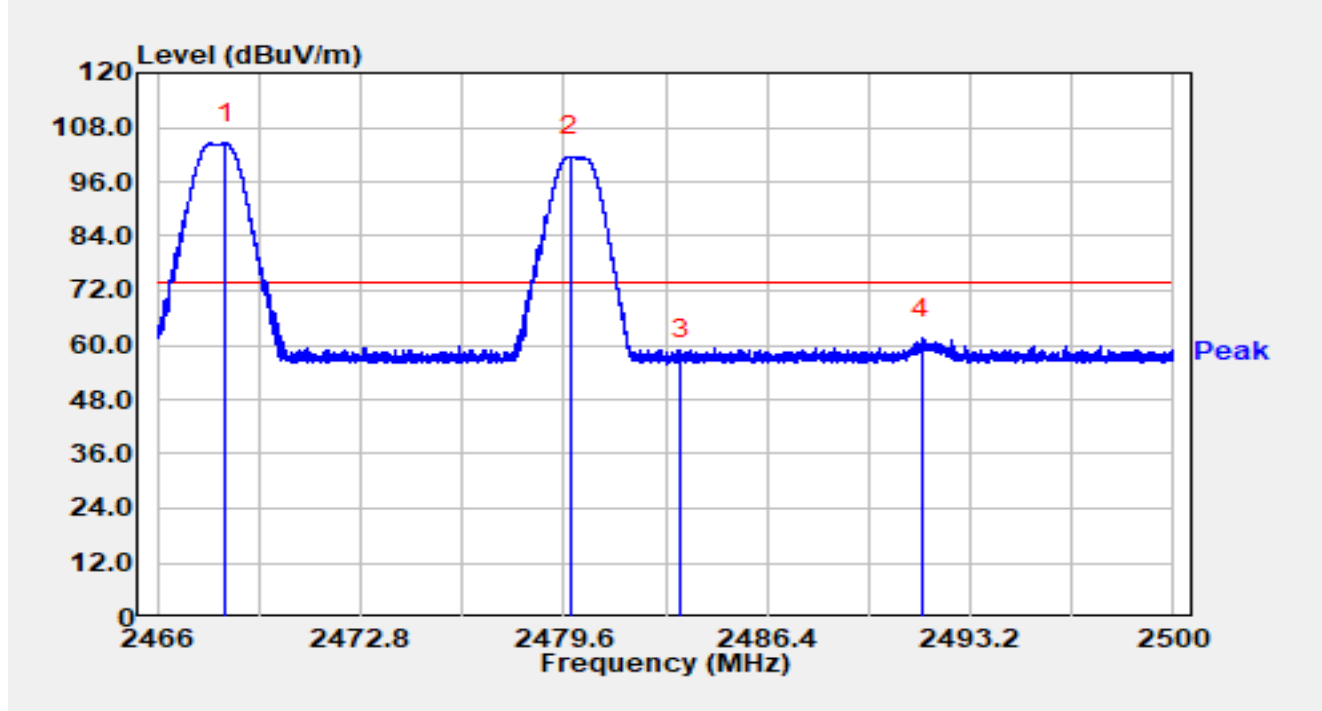


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.271        | 74.77          | 29.72      | 104.49               | N/A         | N/A            | Peak     |
| 2  |      | 2479.797        | 71.86          | 29.75      | 101.61               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 26.97          | 29.76      | 56.74                | -17.26      | 74.00          | Peak     |
| 4  | *    | 2491.578        | 31.67          | 29.79      | 61.46                | -12.54      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2480MHz |               |            |

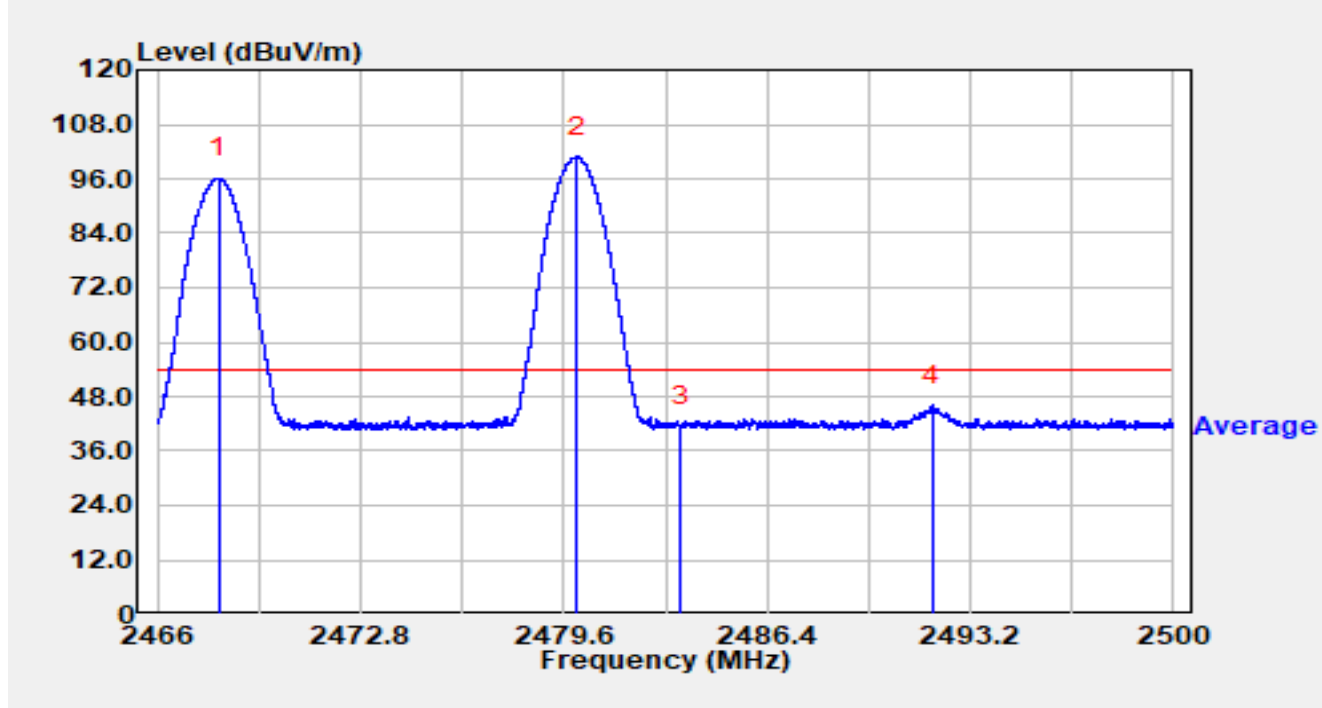


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.054        | 66.29          | 29.72      | 96.01                | N/A         | N/A            | Average  |
| 2  |      | 2480.042        | 71.07          | 29.75      | 100.83               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 11.83          | 29.76      | 41.59                | -12.41      | 54.00          | Average  |
| 4  | *    | 2491.915        | 16.23          | 29.79      | 46.03                | -7.97       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2480MHz |               |            |

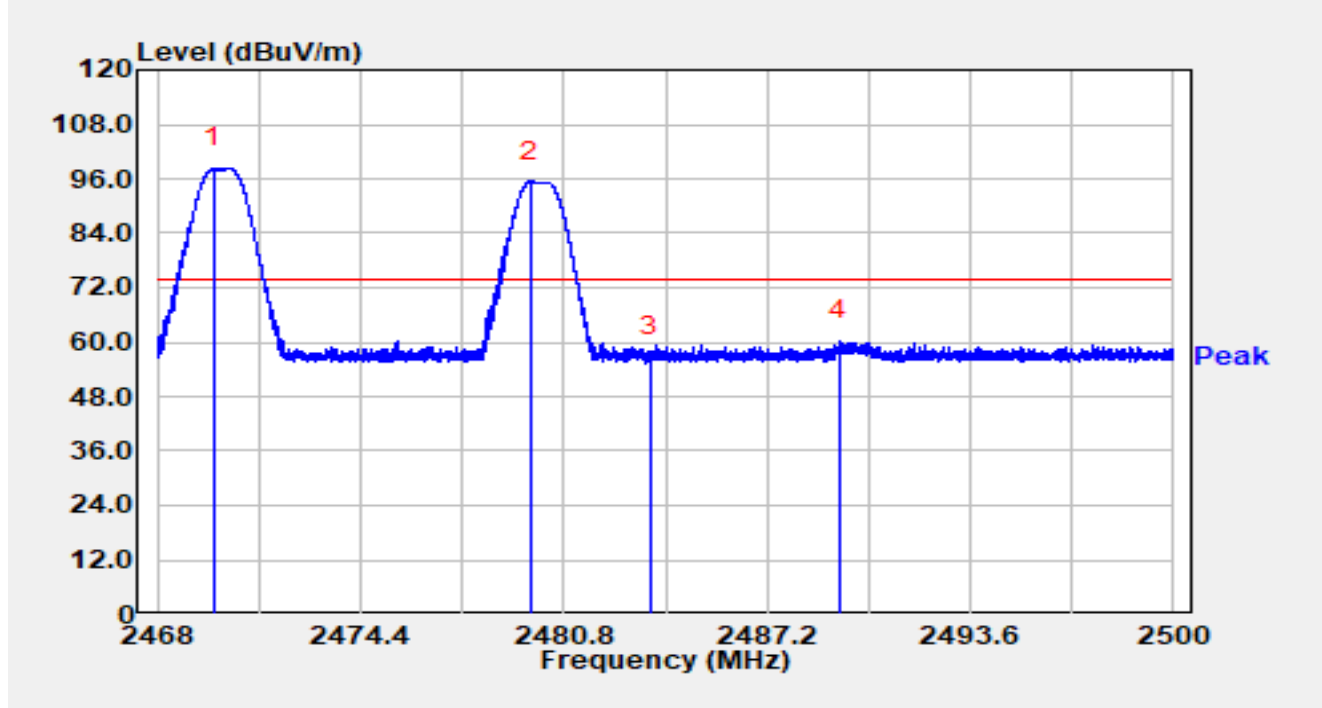


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2469.786        | 68.56          | 29.72      | 98.28                | N/A         | N/A            | Peak     |
| 2  |      | 2479.750        | 65.74          | 29.75      | 95.49                | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 26.86          | 29.76      | 56.62                | -17.38      | 74.00          | Peak     |
| 4  | *    | 2489.485        | 30.63          | 29.78      | 60.42                | -13.58      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2480MHz |               |            |

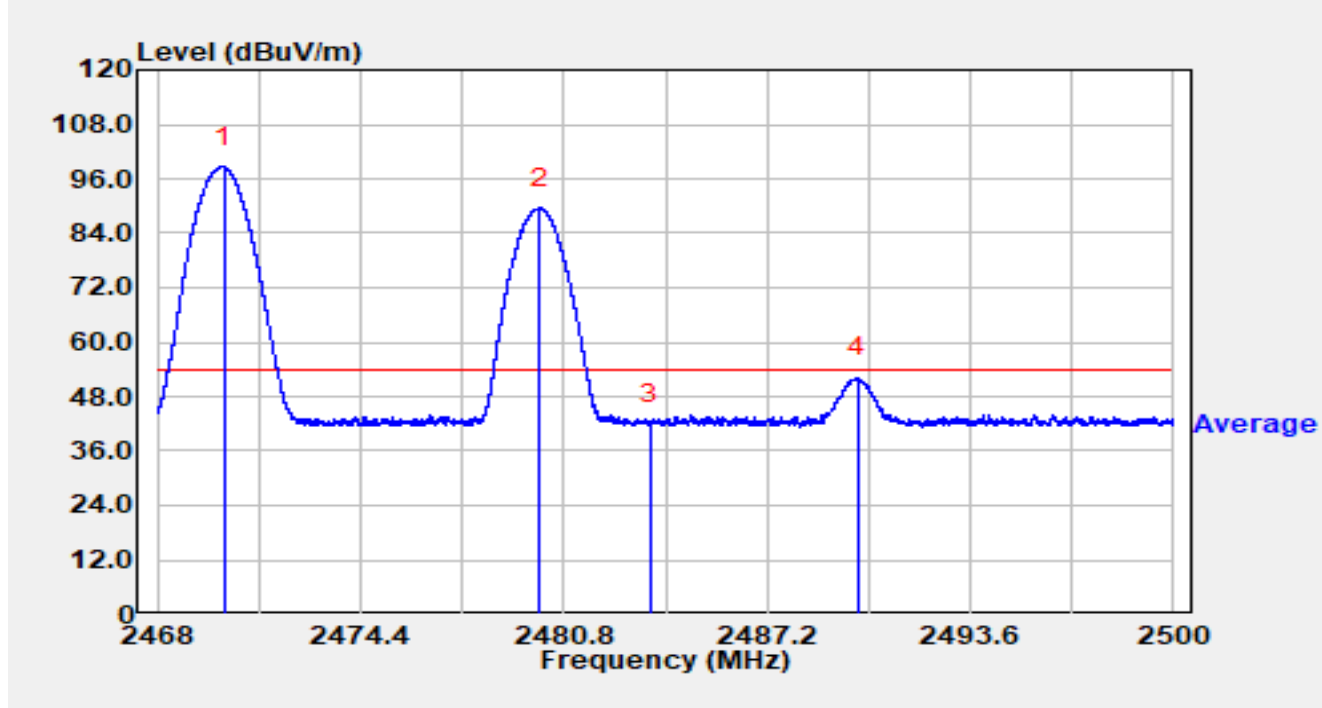


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2470.090        | 68.90          | 29.72      | 98.62                | N/A         | N/A            | Average  |
| 2  |      | 2480.032        | 59.78          | 29.75      | 89.53                | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.31          | 29.76      | 42.07                | -11.93      | 54.00          | Average  |
| 4  | *    | 2490.038        | 22.38          | 29.79      | 52.16                | -1.84       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2480MHz |               |            |

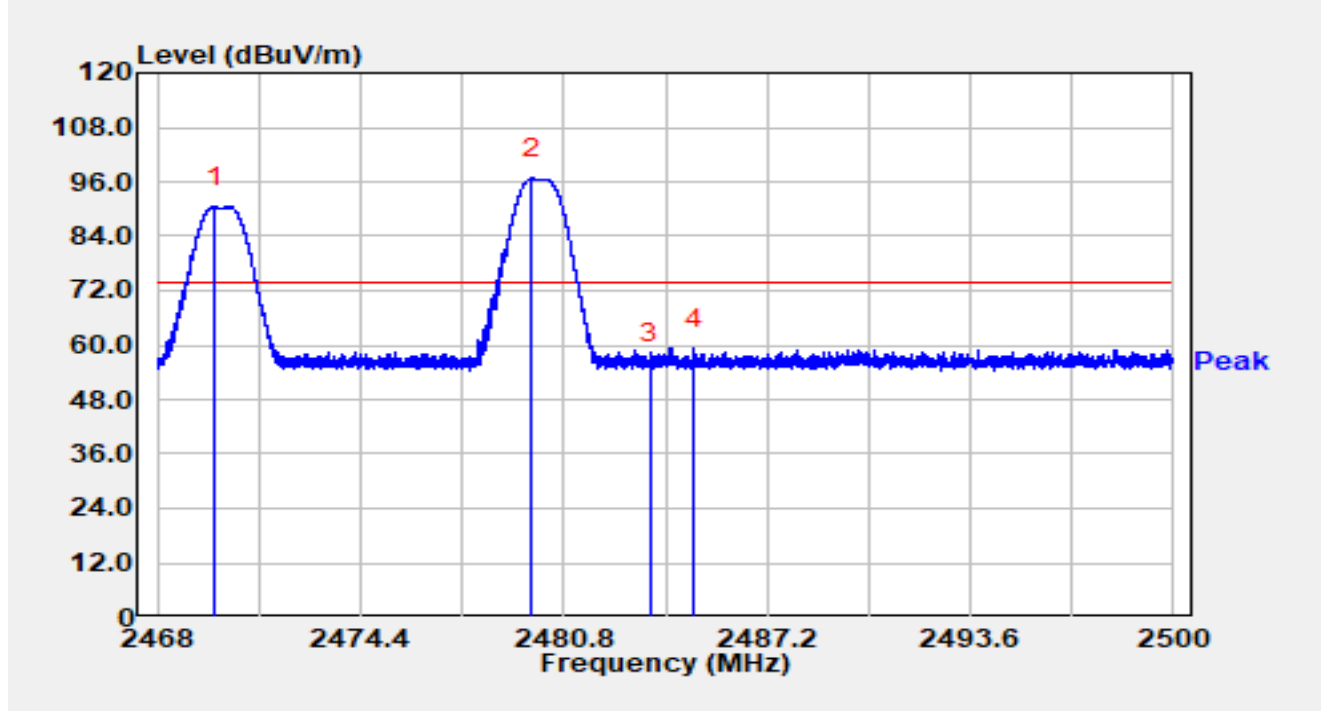


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2469.798        | 60.83          | 29.72      | 90.55                | N/A         | N/A            | Peak     |
| 2  |      | 2479.773        | 66.98          | 29.75      | 96.73                | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 26.26          | 29.76      | 56.03                | -17.97      | 74.00          | Peak     |
| 4  | *    | 2484.915        | 29.54          | 29.77      | 59.31                | -14.69      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2480MHz |               |            |

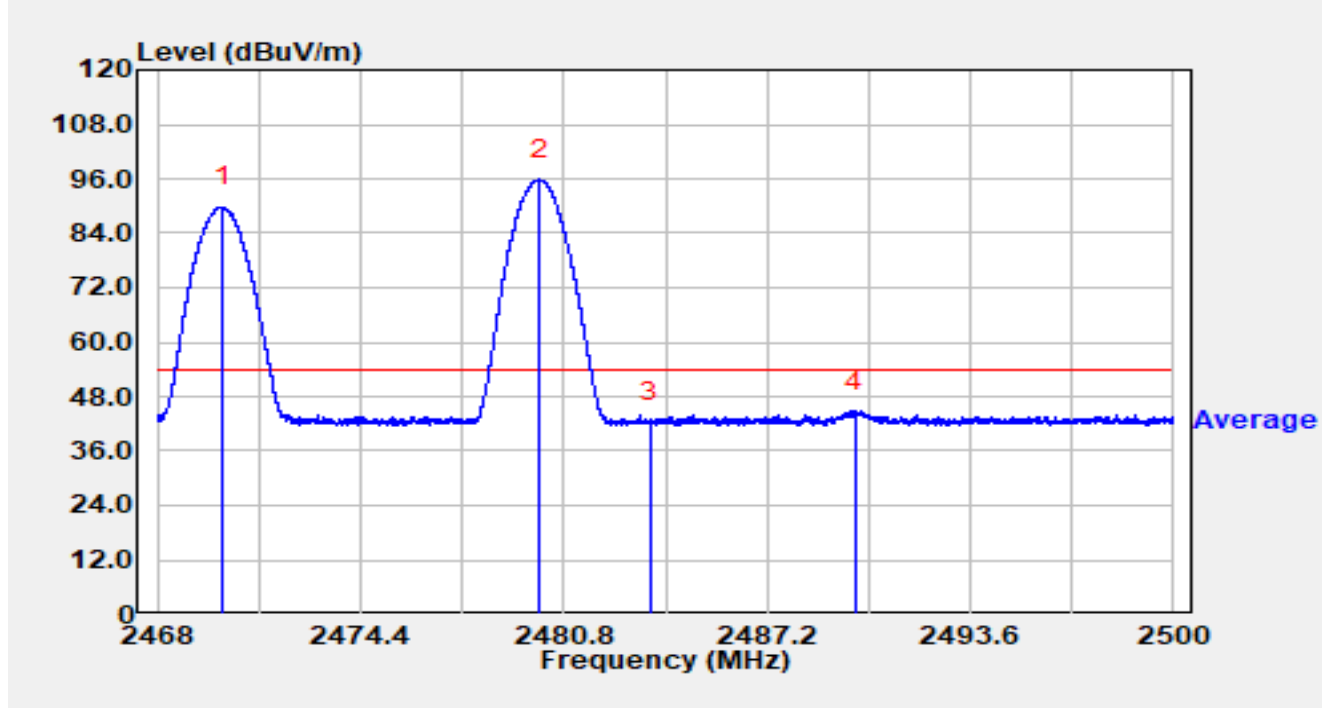


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2470.070        | 60.11          | 29.72      | 89.84                | N/A         | N/A            | Average  |
| 2  |      | 2480.026        | 66.03          | 29.75      | 95.78                | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.76          | 29.76      | 42.52                | -11.48      | 54.00          | Average  |
| 4  | *    | 2489.984        | 15.01          | 29.79      | 44.80                | -9.20       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2480MHz |               |            |

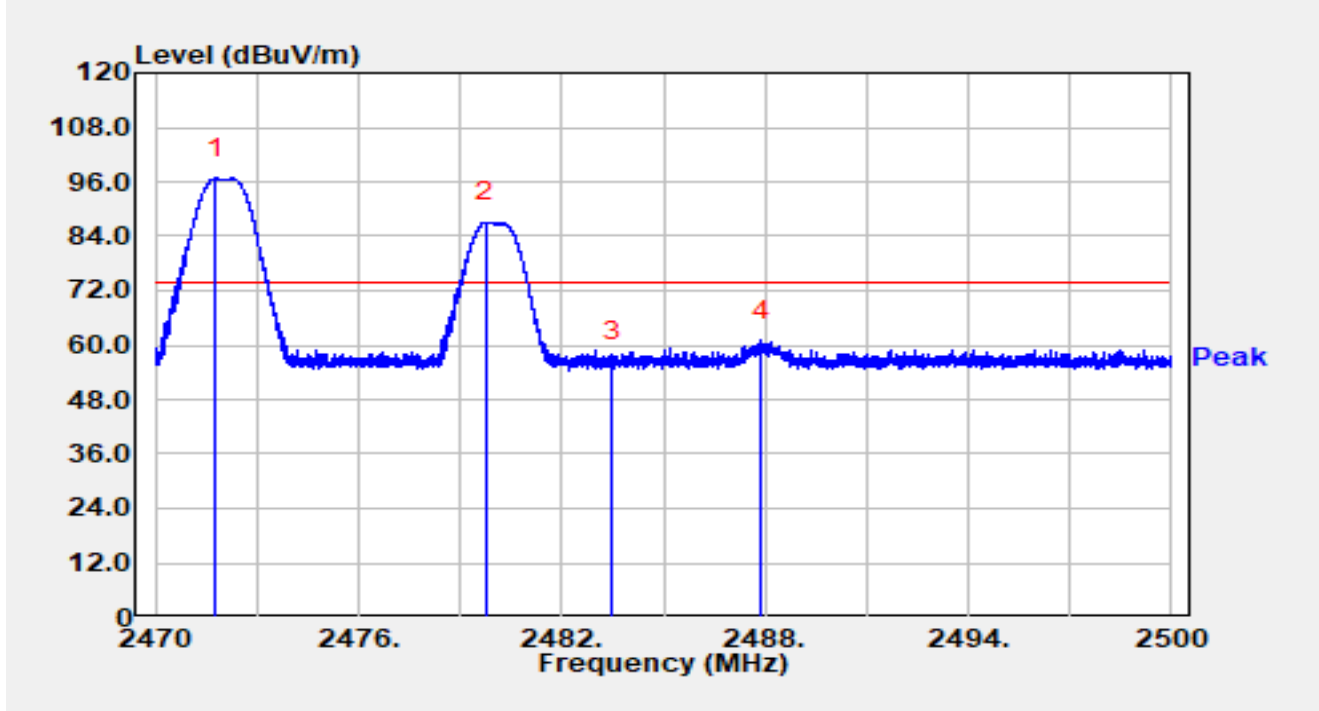


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2471.788        | 67.02          | 29.73      | 96.75                | N/A         | N/A            | Peak     |
| 2  |      | 2479.768        | 57.41          | 29.75      | 87.16                | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 26.69          | 29.76      | 56.45                | -17.55      | 74.00          | Peak     |
| 4  | *    | 2487.883        | 31.34          | 29.78      | 61.12                | -12.88      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2480MHz |               |            |

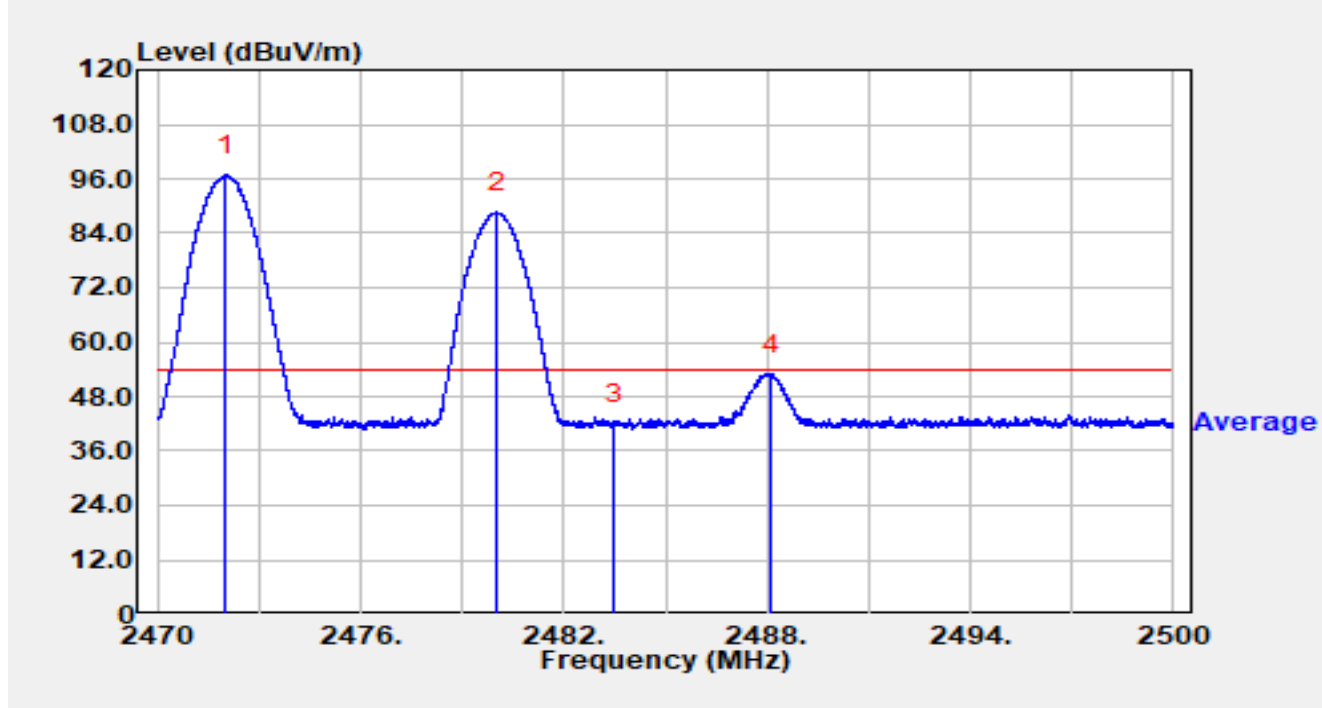


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2472.019        | 66.96          | 29.73      | 96.69                | N/A         | N/A            | Average  |
| 2  |      | 2480.017        | 58.80          | 29.75      | 88.55                | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.33          | 29.76      | 42.10                | -11.90      | 54.00          | Average  |
| 4  | *    | 2488.138        | 23.10          | 29.78      | 52.88                | -1.12       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2480MHz |               |            |

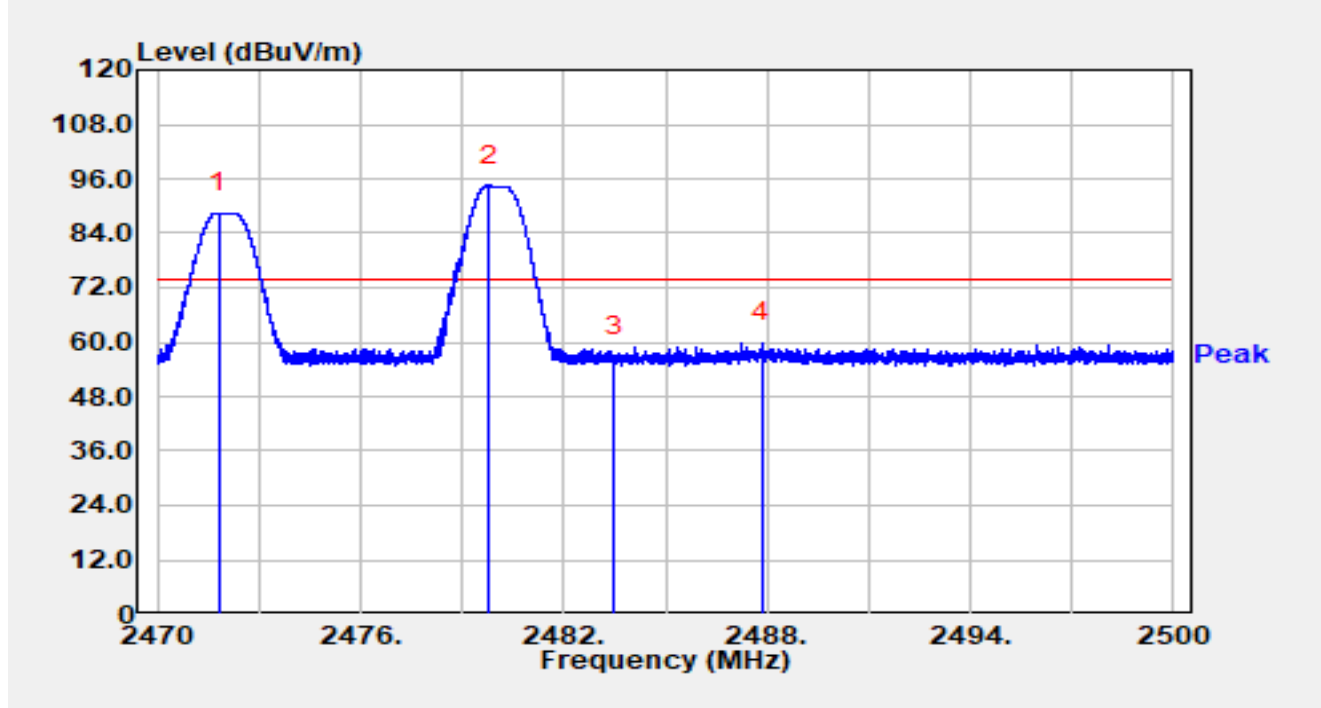


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2471.809        | 58.78          | 29.73      | 88.50                | N/A         | N/A            | Peak     |
| 2  |      | 2479.774        | 64.85          | 29.75      | 94.60                | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 27.27          | 29.76      | 57.03                | -16.97      | 74.00          | Peak     |
| 4  | *    | 2487.850        | 30.11          | 29.78      | 59.89                | -14.11      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2480MHz |               |            |

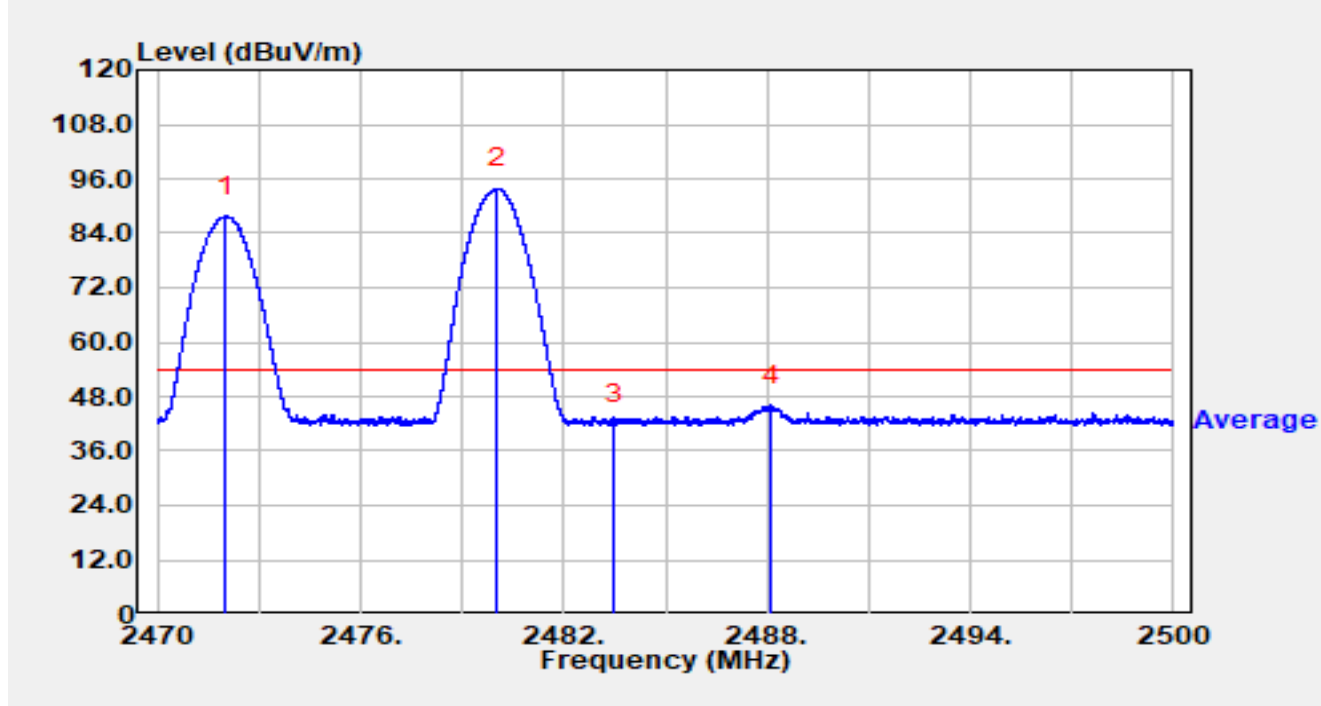


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2472.028        | 57.96          | 29.73      | 87.68                | N/A         | N/A            | Average  |
| 2  |      | 2480.041        | 64.01          | 29.75      | 93.77                | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.18          | 29.76      | 41.94                | -12.06      | 54.00          | Average  |
| 4  | *    | 2488.138        | 16.25          | 29.78      | 46.03                | -7.97       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2474MHz Core1 2480MHz |               |            |

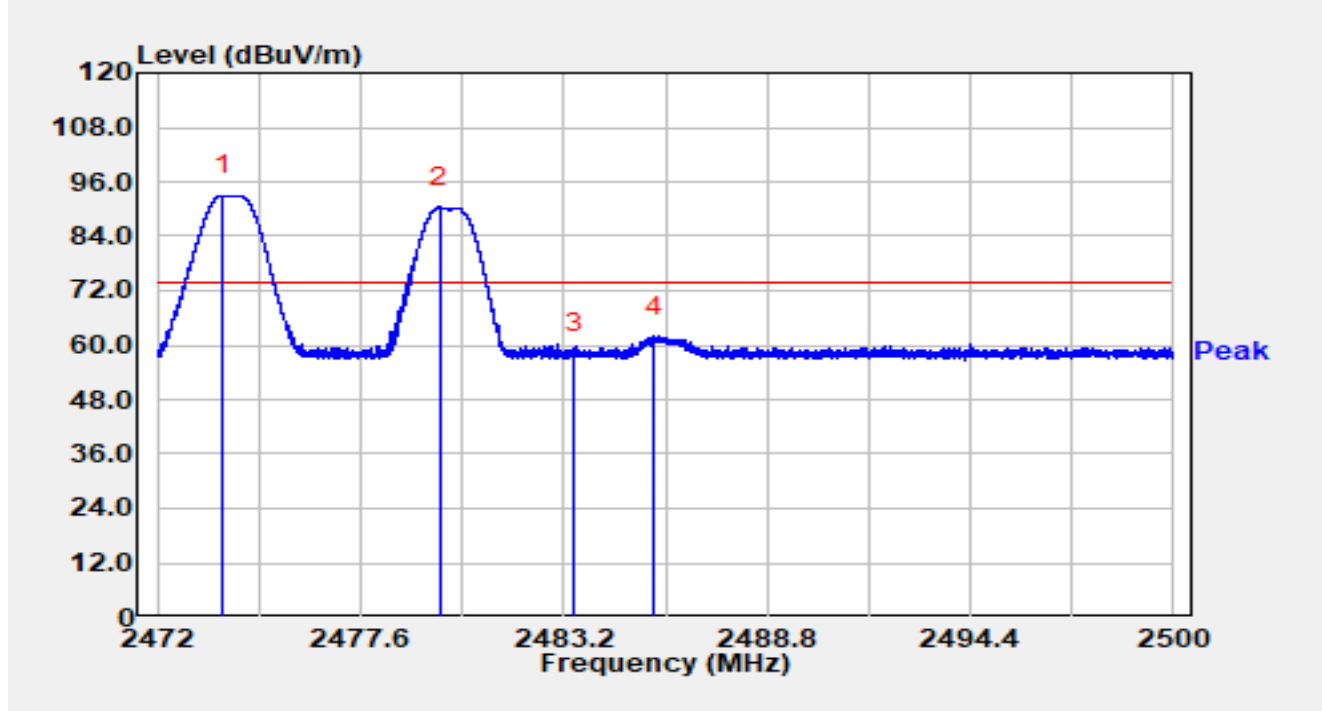


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2473.795        | 63.29          | 29.73      | 93.02                | N/A         | N/A            | Peak     |
| 2  |      | 2479.778        | 60.62          | 29.75      | 90.37                | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 28.35          | 29.76      | 58.11                | -15.89      | 74.00          | Peak     |
| 4  | *    | 2485.686        | 32.20          | 29.77      | 61.98                | -12.02      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2474MHz Core1 2480MHz |               |            |

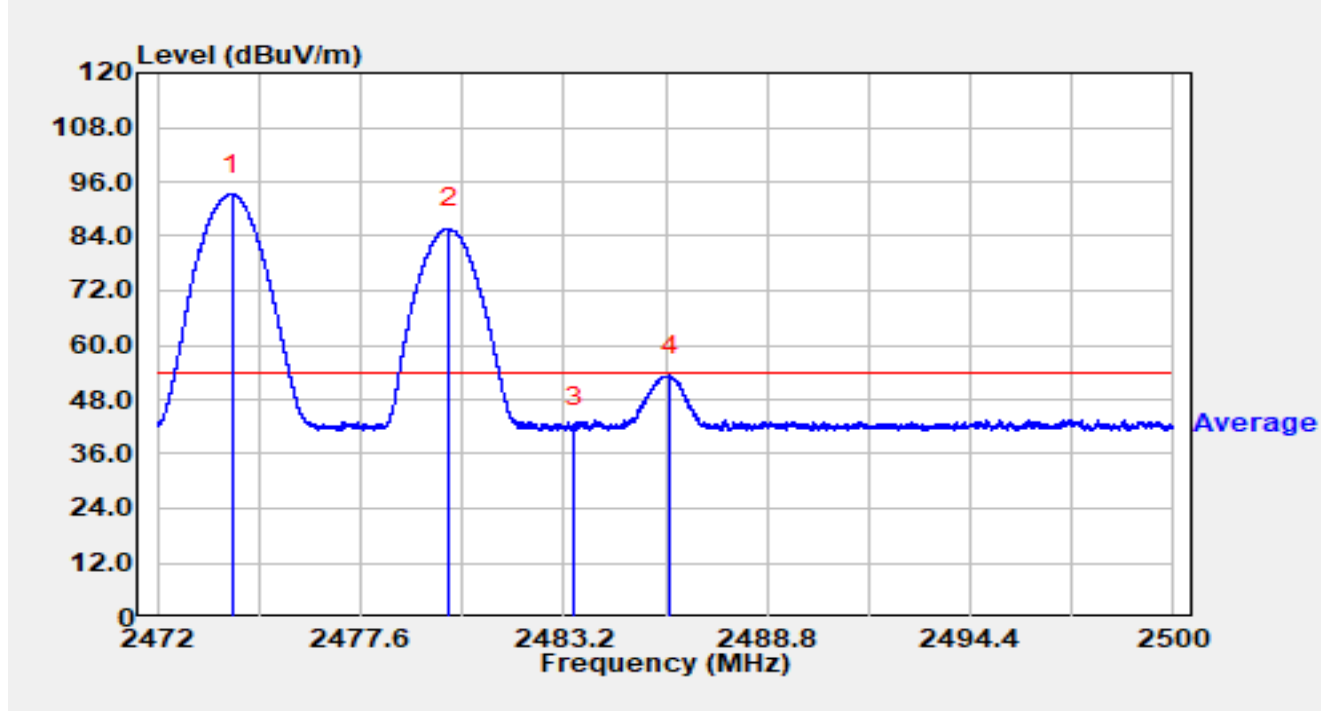


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2474.075        | 63.54          | 29.73      | 93.27                | N/A         | N/A            | Average  |
| 2  |      | 2480.056        | 55.93          | 29.75      | 85.69                | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 11.94          | 29.76      | 41.71                | -12.29      | 54.00          | Average  |
| 4  | *    | 2486.118        | 23.52          | 29.77      | 53.29                | -0.71       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2474MHz Core1 2480MHz |               |            |

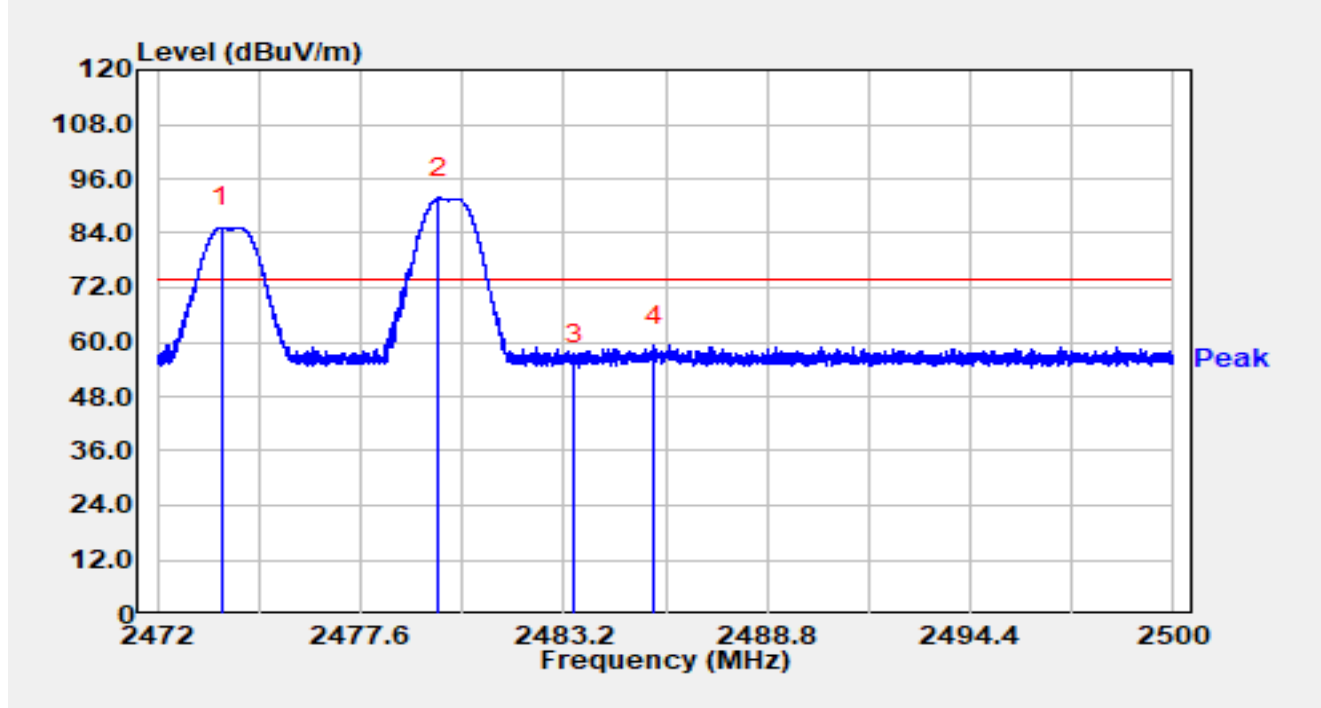


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2473.781        | 55.57          | 29.73      | 85.30                | N/A         | N/A            | Peak     |
| 2  |      | 2479.742        | 62.01          | 29.75      | 91.76                | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 25.29          | 29.76      | 55.06                | -18.94      | 74.00          | Peak     |
| 4  | *    | 2485.686        | 29.43          | 29.77      | 59.20                | -14.80      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2474MHz Core1 2480MHz |               |            |

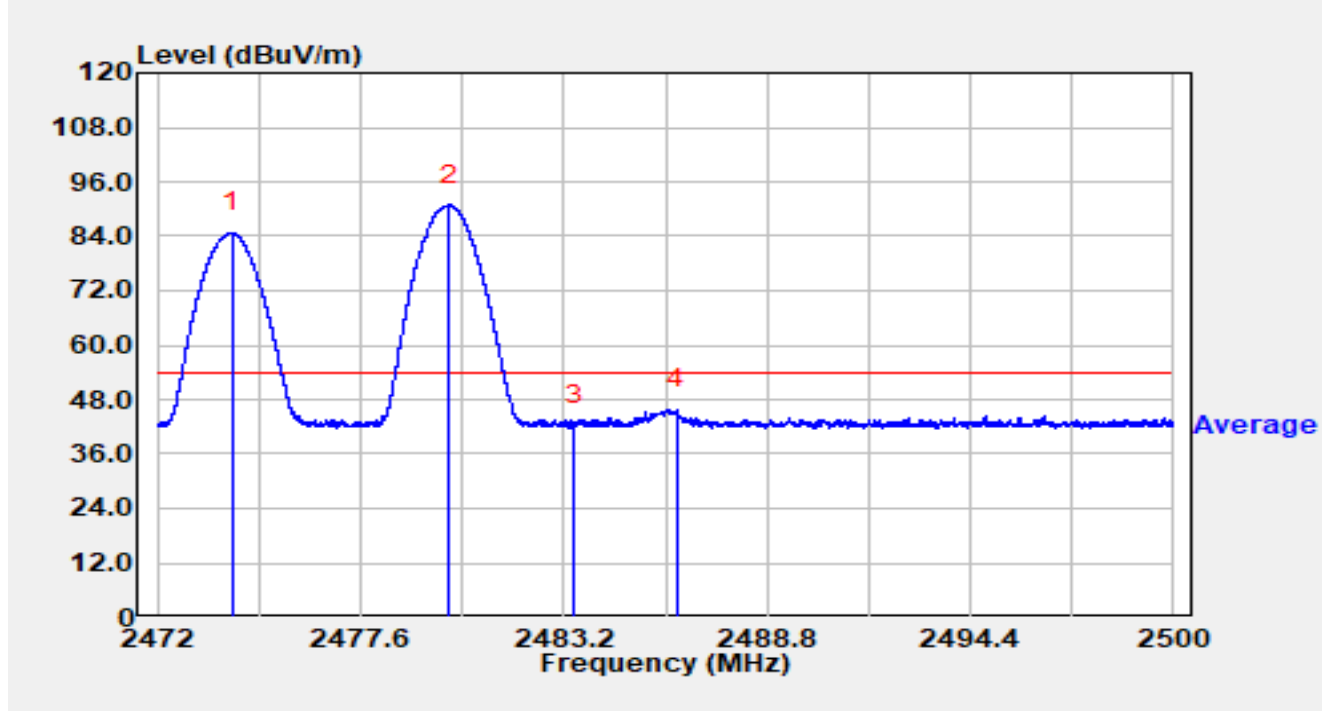


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2474.047        | 55.04          | 29.73      | 84.77                | N/A         | N/A            | Average  |
| 2  |      | 2480.028        | 61.07          | 29.75      | 90.82                | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.69          | 29.76      | 42.46                | -11.54      | 54.00          | Average  |
| 4  | *    | 2486.305        | 16.02          | 29.77      | 45.79                | -8.21       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2476MHz Core1 2480MHz |               |            |

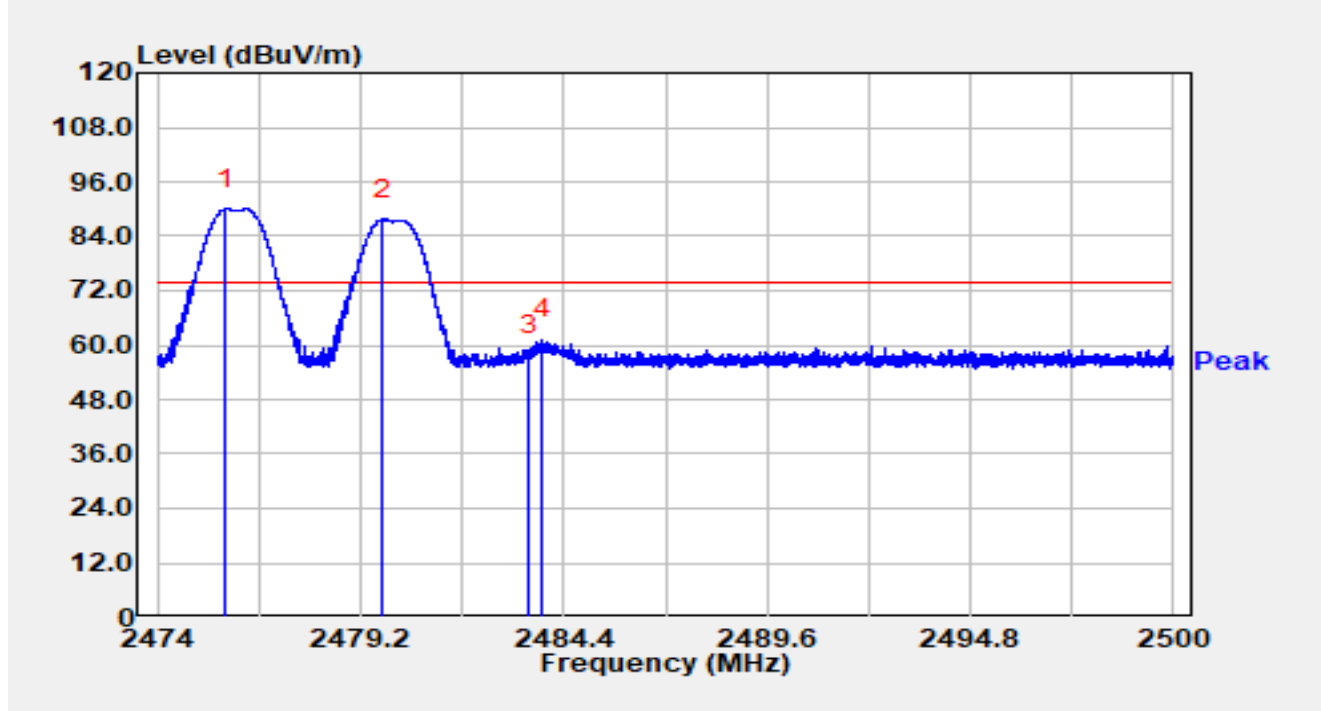


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2475.735        | 60.27          | 29.74      | 90.00                | N/A         | N/A            | Peak     |
| 2  |      | 2479.750        | 57.94          | 29.75      | 87.69                | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 27.79          | 29.76      | 57.56                | -16.44      | 74.00          | Peak     |
| 4  | *    | 2483.843        | 31.38          | 29.77      | 61.15                | -12.85      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2476MHz Core1 2480MHz |               |            |

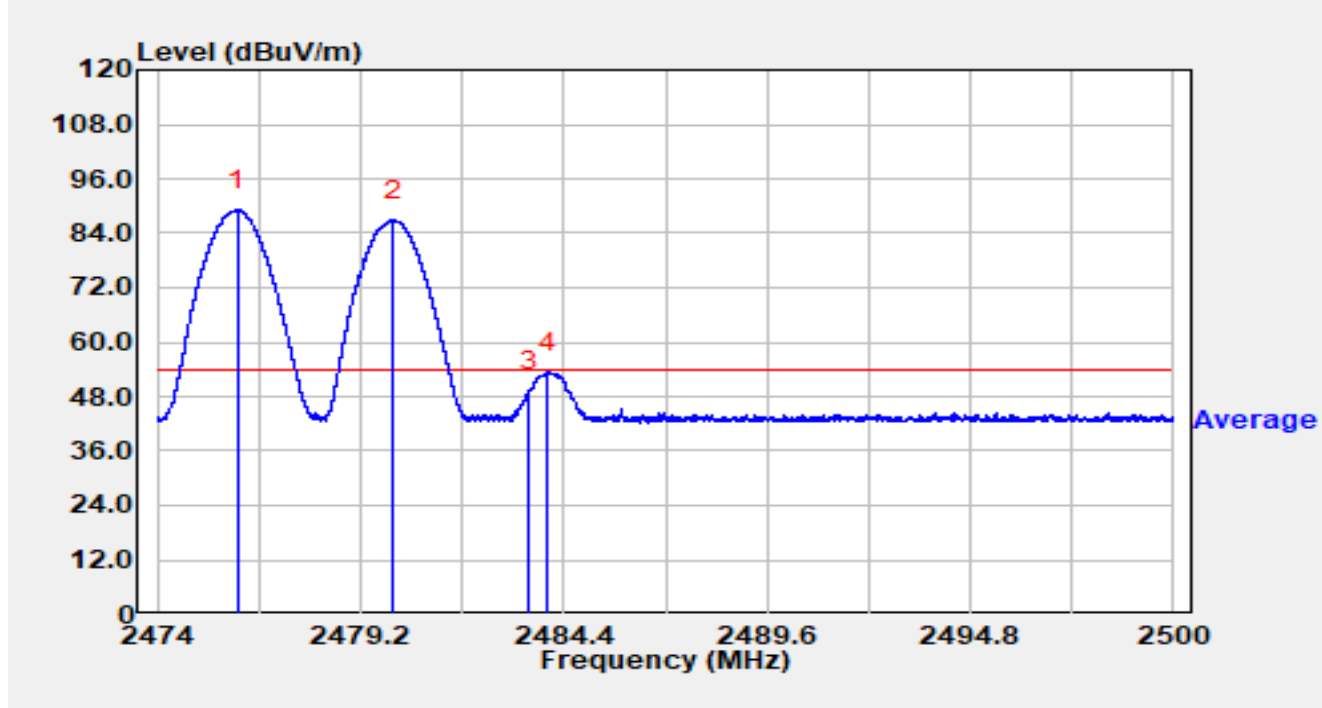


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2476.061        | 59.36          | 29.74      | 89.10                | N/A         | N/A            | Average  |
| 2  |      | 2480.040        | 57.13          | 29.75      | 86.88                | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 19.52          | 29.76      | 49.28                | -4.72       | 54.00          | Average  |
| 4  | *    | 2483.973        | 23.67          | 29.77      | 53.43                | -0.57       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2476MHz Core1 2480MHz |               |            |

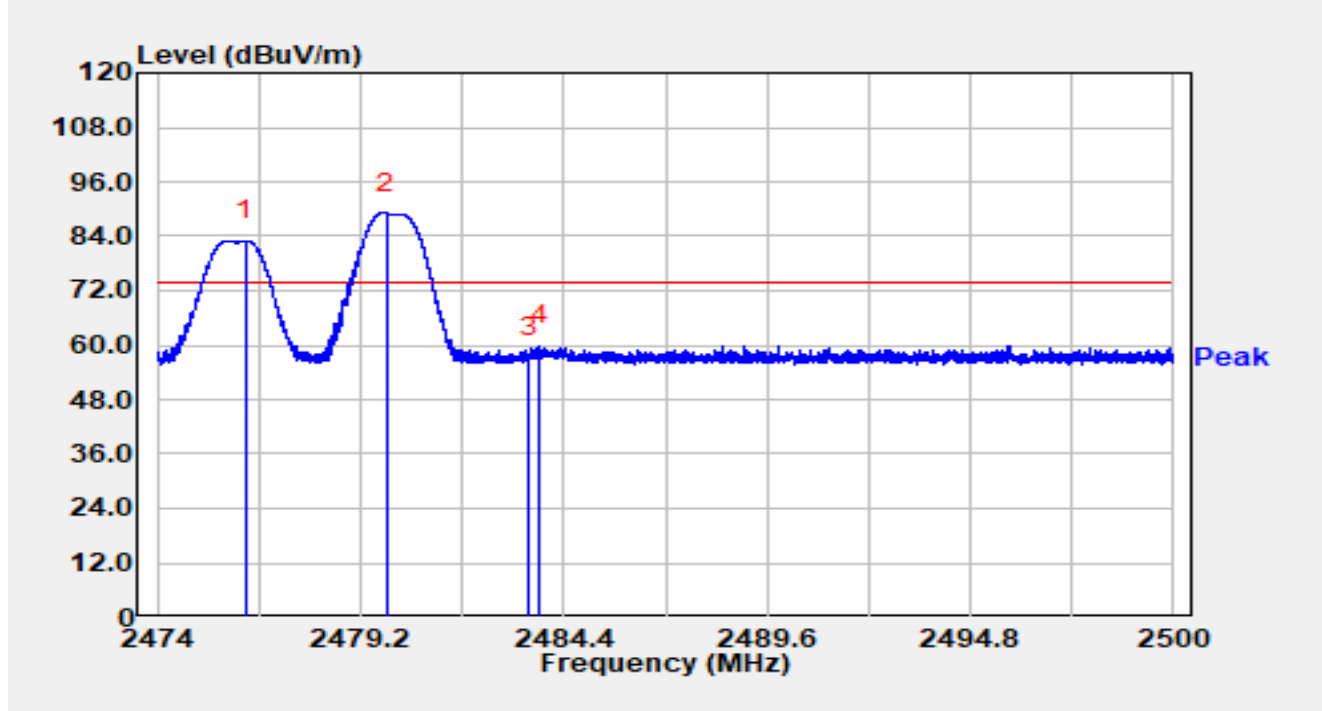


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2476.265        | 53.32          | 29.74      | 83.06                | N/A         | N/A            | Peak     |
| 2  |      | 2479.851        | 59.43          | 29.75      | 89.18                | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 27.60          | 29.76      | 57.37                | -16.63      | 74.00          | Peak     |
| 4  | *    | 2483.792        | 30.17          | 29.77      | 59.93                | -14.07      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2476MHz Core1 2480MHz |               |            |

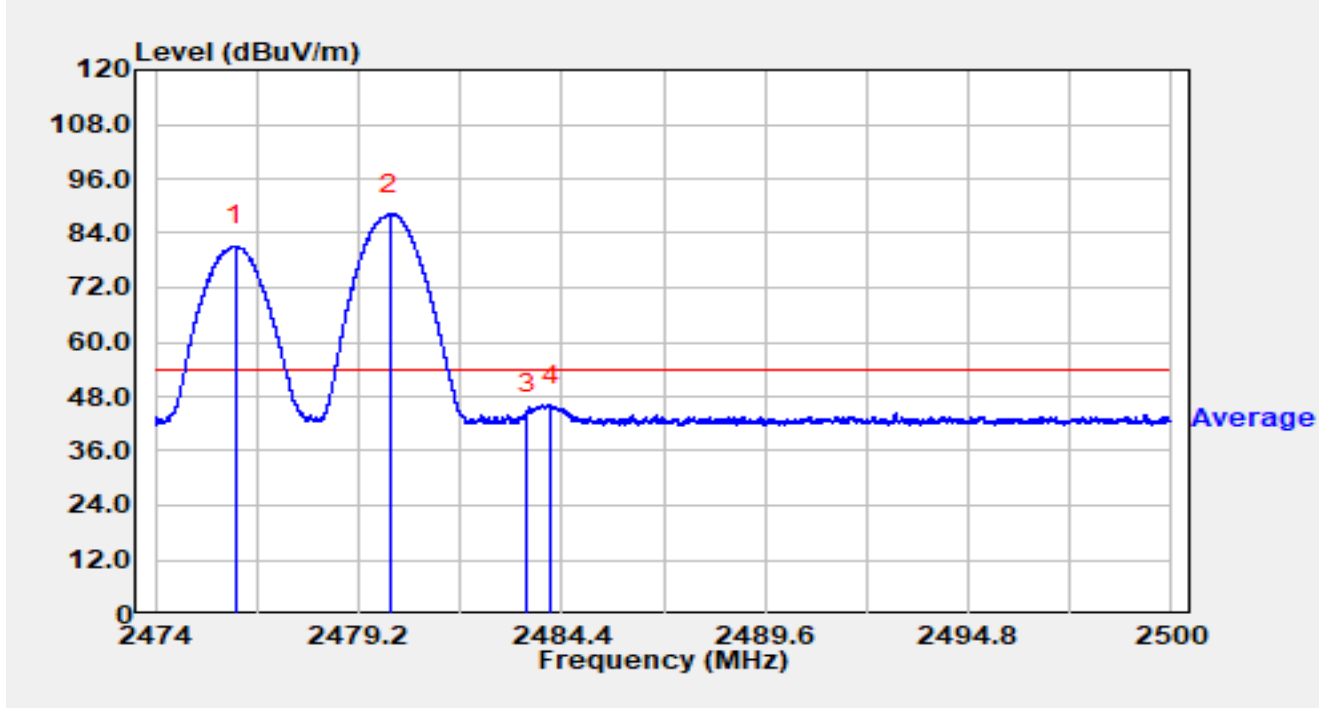


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2476.035        | 51.40          | 29.74      | 81.14                | N/A         | N/A            | Average  |
| 2  |      | 2480.002        | 58.47          | 29.75      | 88.22                | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 14.20          | 29.76      | 43.97                | -10.03      | 54.00          | Average  |
| 4  | *    | 2484.124        | 16.35          | 29.77      | 46.12                | -7.88       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2478MHz Core1 2480MHz |               |            |

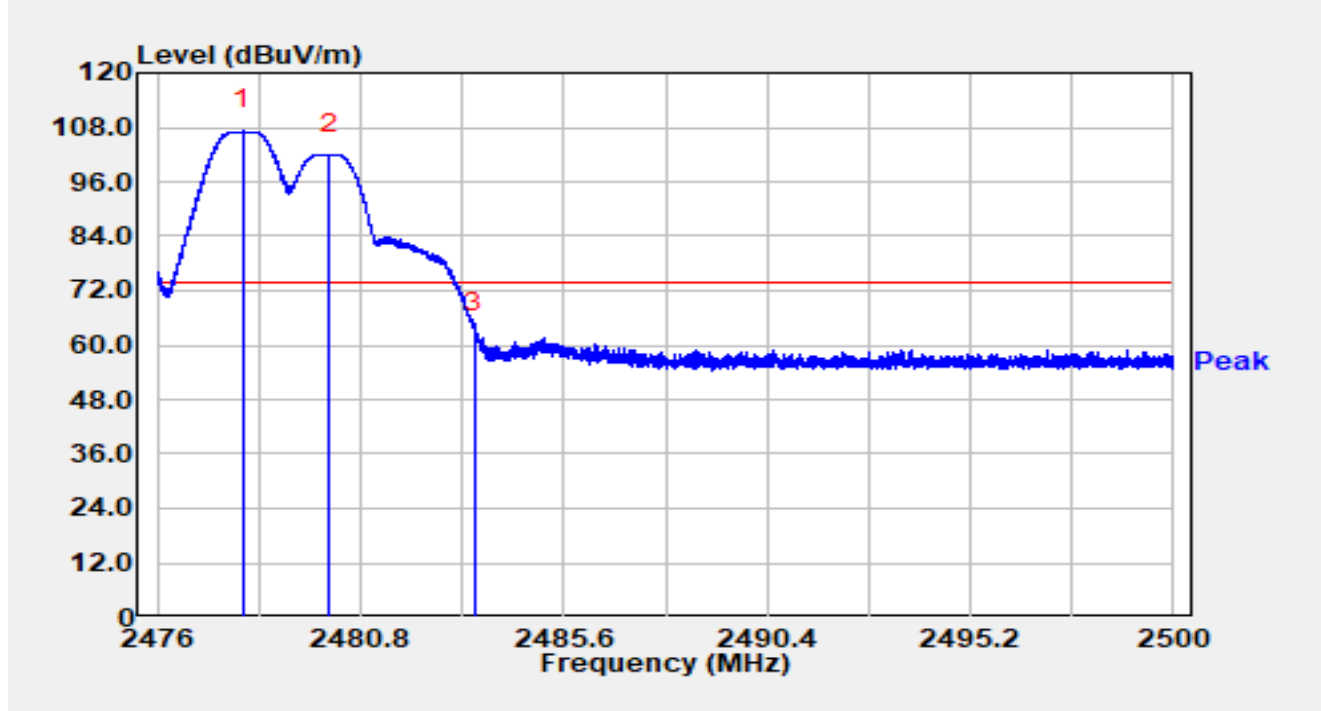


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2478.021        | 77.58          | 29.74      | 107.32               | N/A         | N/A            | Peak     |
| 2  |      | 2480.049        | 72.33          | 29.75      | 102.08               | N/A         | N/A            | Peak     |
| 3  | *    | 2483.500        | 32.80          | 29.76      | 62.56                | -11.44      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2478MHz Core1 2480MHz |               |            |

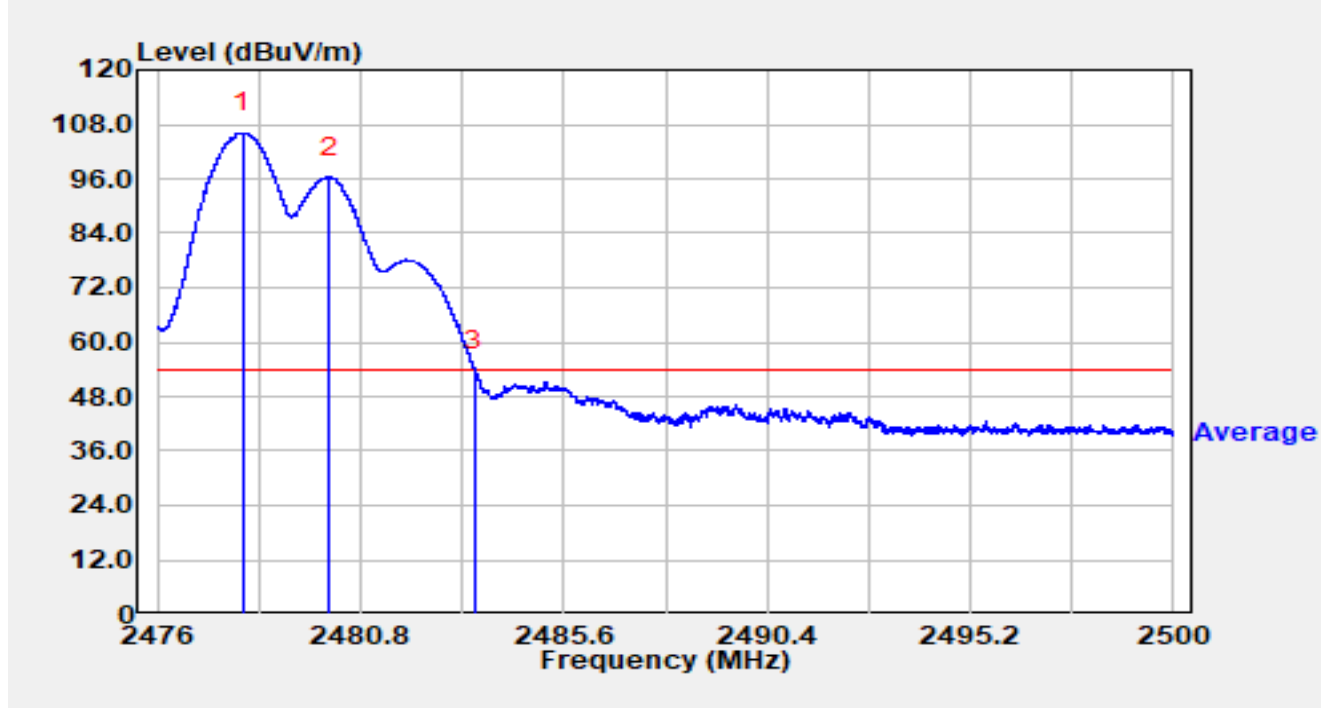


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2478.023        | 76.38          | 29.74      | 106.13               | N/A         | N/A            | Average  |
| 2  |      | 2480.051        | 66.61          | 29.75      | 96.36                | N/A         | N/A            | Average  |
| 3  | *    | 2483.500        | 23.71          | 29.76      | 53.47                | -0.53       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2478MHz Core1 2480MHz |               |            |

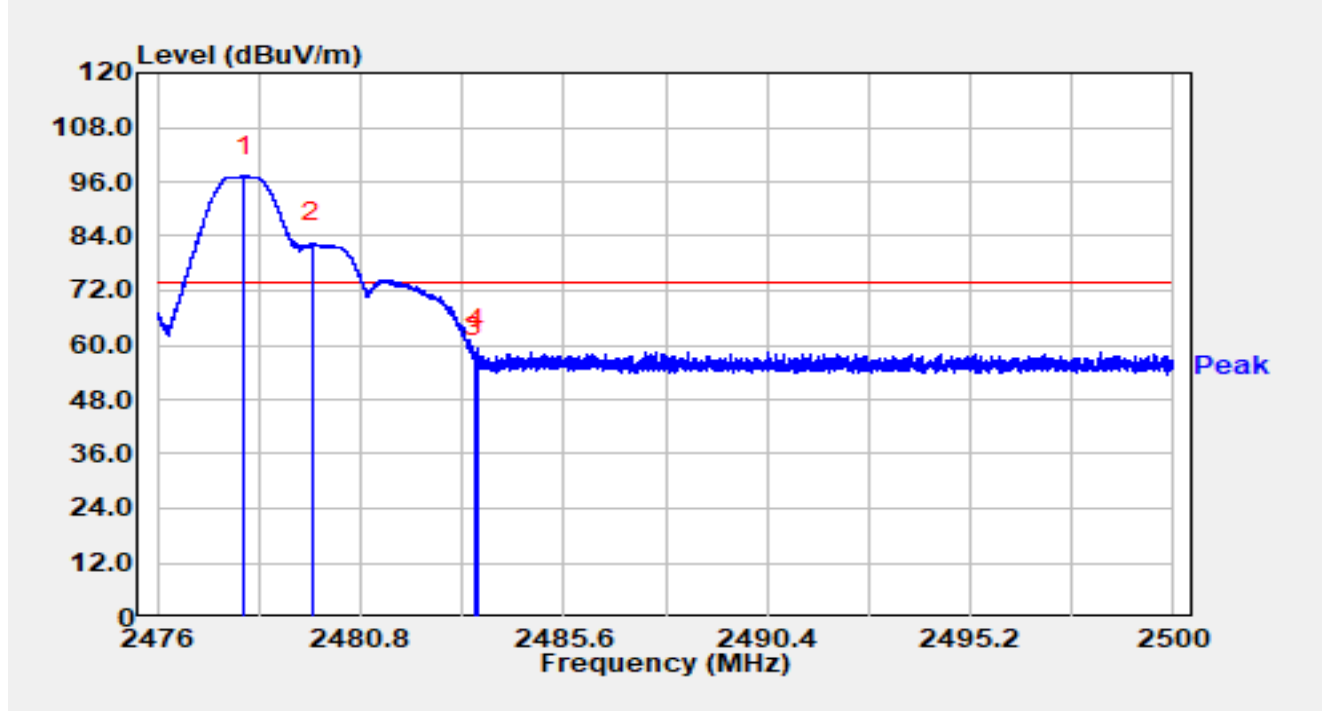


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2478.042        | 67.60          | 29.75      | 97.34                | N/A         | N/A            | Peak     |
| 2  |      | 2479.650        | 52.73          | 29.75      | 82.48                | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 27.54          | 29.76      | 57.30                | -16.70      | 74.00          | Peak     |
| 4  | *    | 2483.565        | 29.43          | 29.76      | 59.19                | -14.81      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2478MHz Core1 2480MHz |               |            |

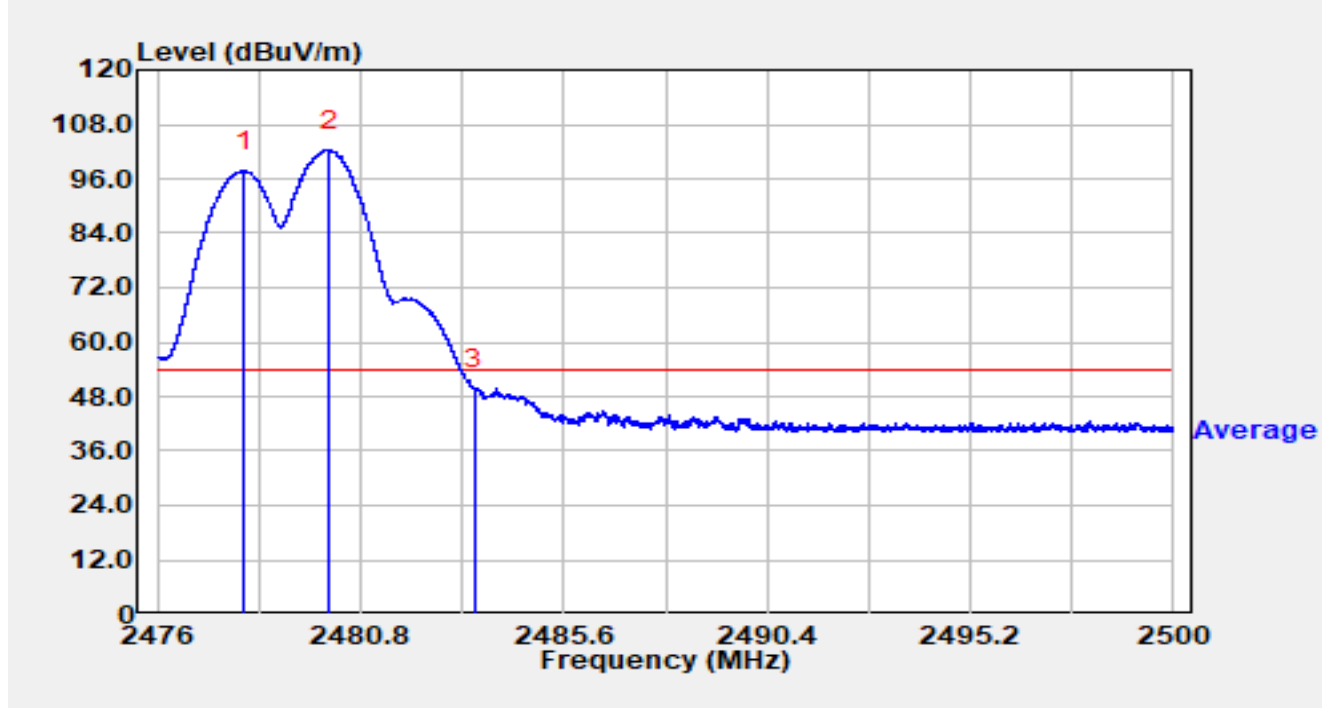


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2478.047        | 67.98          | 29.75      | 97.72                | N/A         | N/A            | Average  |
| 2  |      | 2480.066        | 72.53          | 29.75      | 102.28               | N/A         | N/A            | Average  |
| 3  | *    | 2483.500        | 19.91          | 29.76      | 49.68                | -4.32       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2402MHz Core1 2404MHz |               |            |

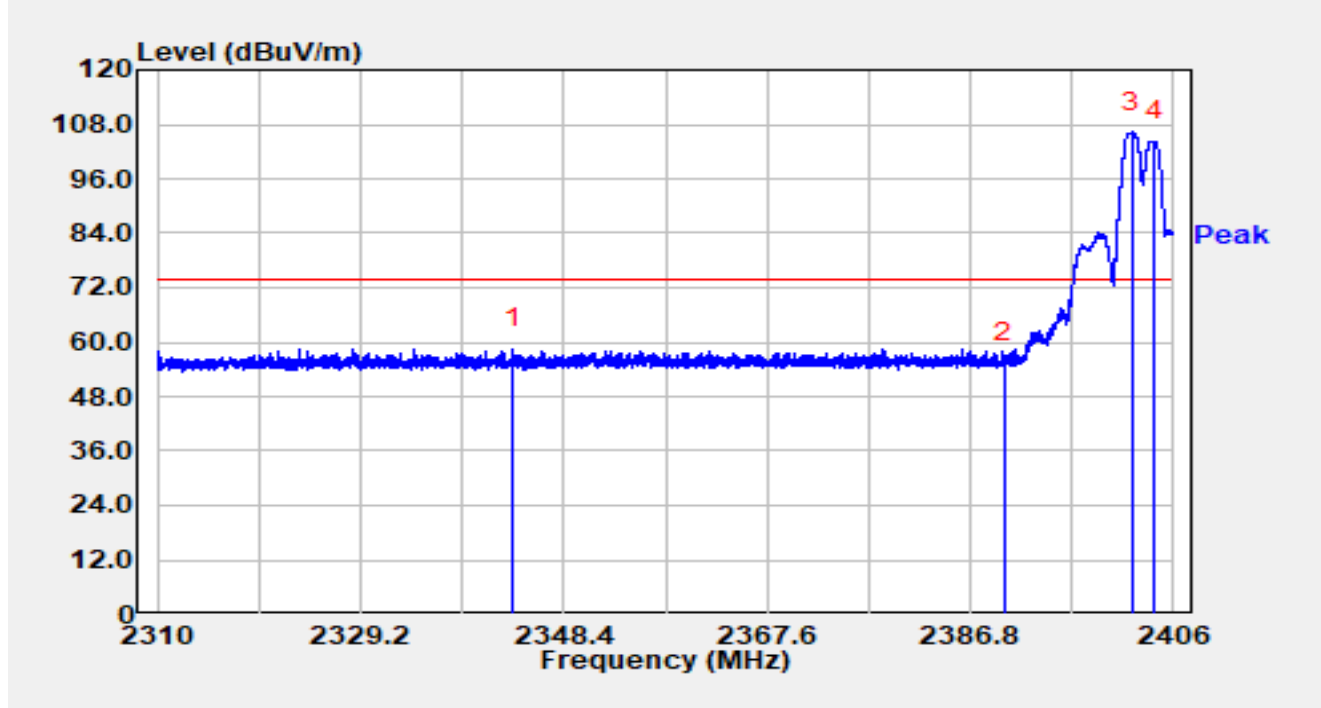


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2343.562        | 29.07          | 29.50      | 58.57                | -15.43      | 74.00          | Peak     |
| 2  |      | 2389.997        | 25.96          | 29.59      | 55.56                | -18.44      | 74.00          | Peak     |
| 3  |      | 2402.083        | 76.64          | 29.64      | 106.28               | N/A         | N/A            | Peak     |
| 4  |      | 2404.176        | 74.70          | 29.64      | 104.34               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2402MHz Core1 2404MHz |               |            |

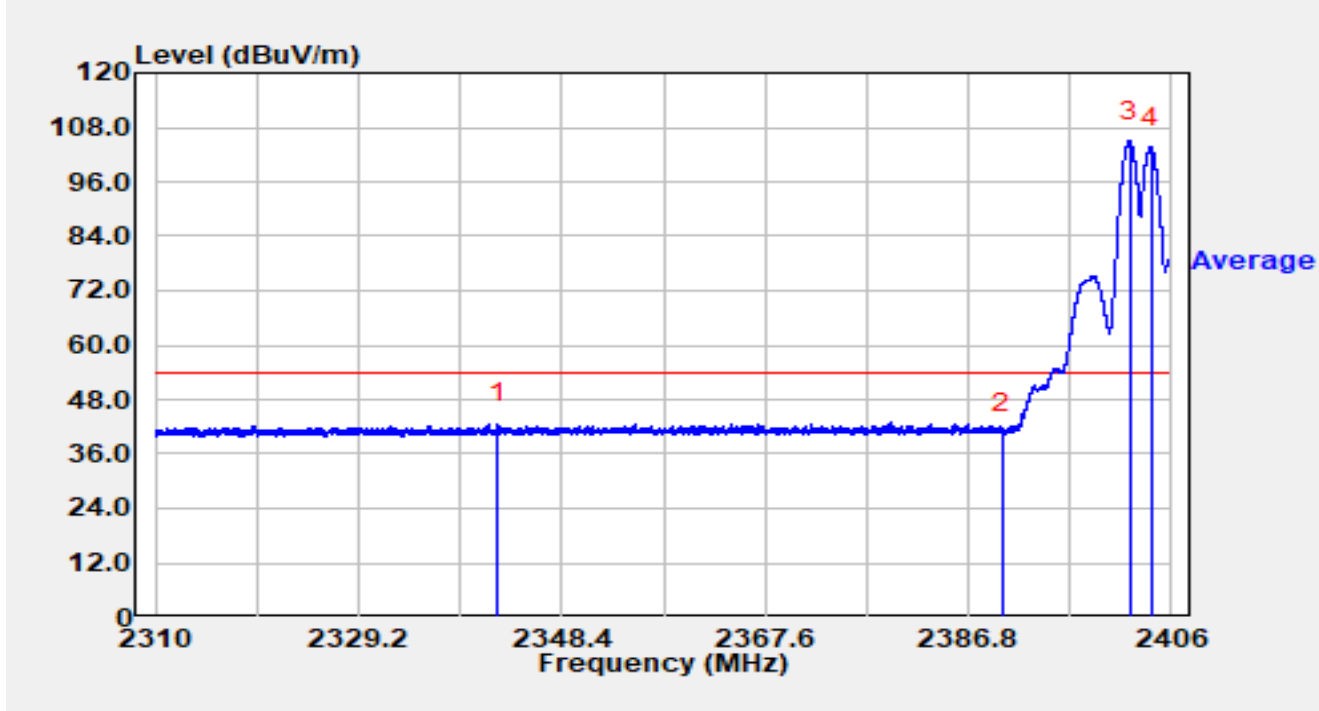


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2342.304        | 13.10          | 29.49      | 42.59                | -11.41      | 54.00          | Average  |
| 2  |      | 2390.000        | 10.99          | 29.59      | 40.58                | -13.42      | 54.00          | Average  |
| 3  |      | 2402.045        | 75.35          | 29.64      | 104.99               | N/A         | N/A            | Average  |
| 4  |      | 2404.118        | 73.94          | 29.64      | 103.57               | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2402MHz Core1 2404MHz |               |            |

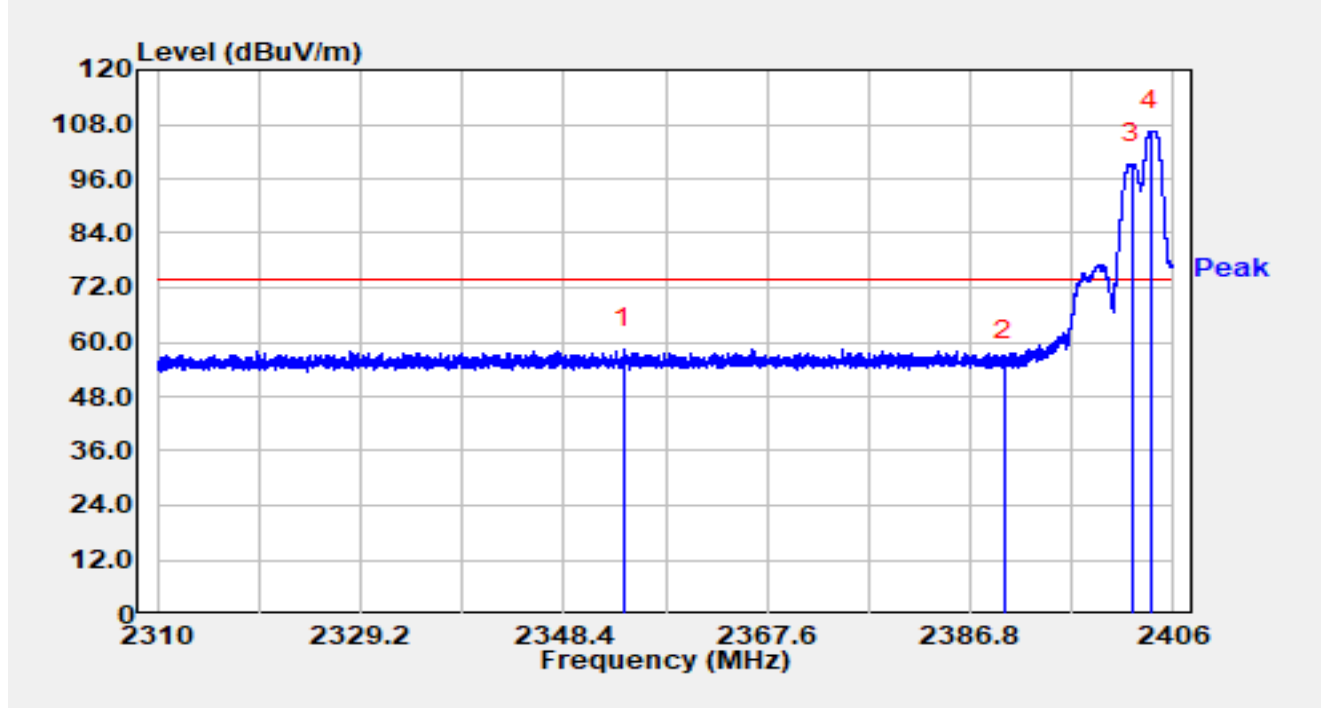


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2354.006        | 29.08          | 29.53      | 58.61                | -15.39      | 74.00          | Peak     |
| 2  |      | 2390.000        | 26.51          | 29.59      | 56.10                | -17.90      | 74.00          | Peak     |
| 3  |      | 2402.064        | 69.74          | 29.64      | 99.38                | N/A         | N/A            | Peak     |
| 4  |      | 2403.811        | 76.88          | 29.64      | 106.52               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2402MHz Core1 2404MHz |               |            |

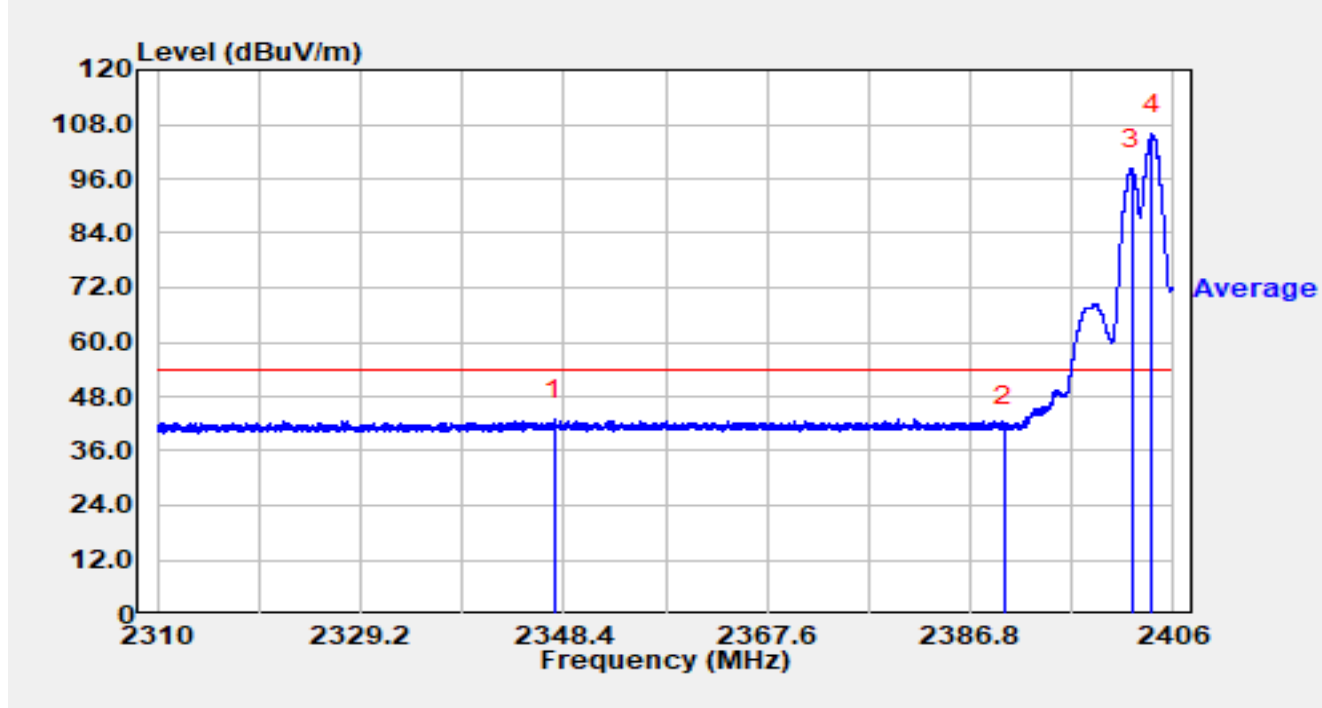


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2347.546        | 13.45          | 29.51      | 42.96                | -11.04      | 54.00          | Average  |
| 2  |      | 2389.997        | 11.73          | 29.59      | 41.33                | -12.67      | 54.00          | Average  |
| 3  |      | 2402.035        | 68.48          | 29.64      | 98.12                | N/A         | N/A            | Average  |
| 4  |      | 2404.013        | 76.12          | 29.64      | 105.76               | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

### Core 0 and Core 1 simultaneous transmission (Different Power Settings)

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2476MHz |               |            |

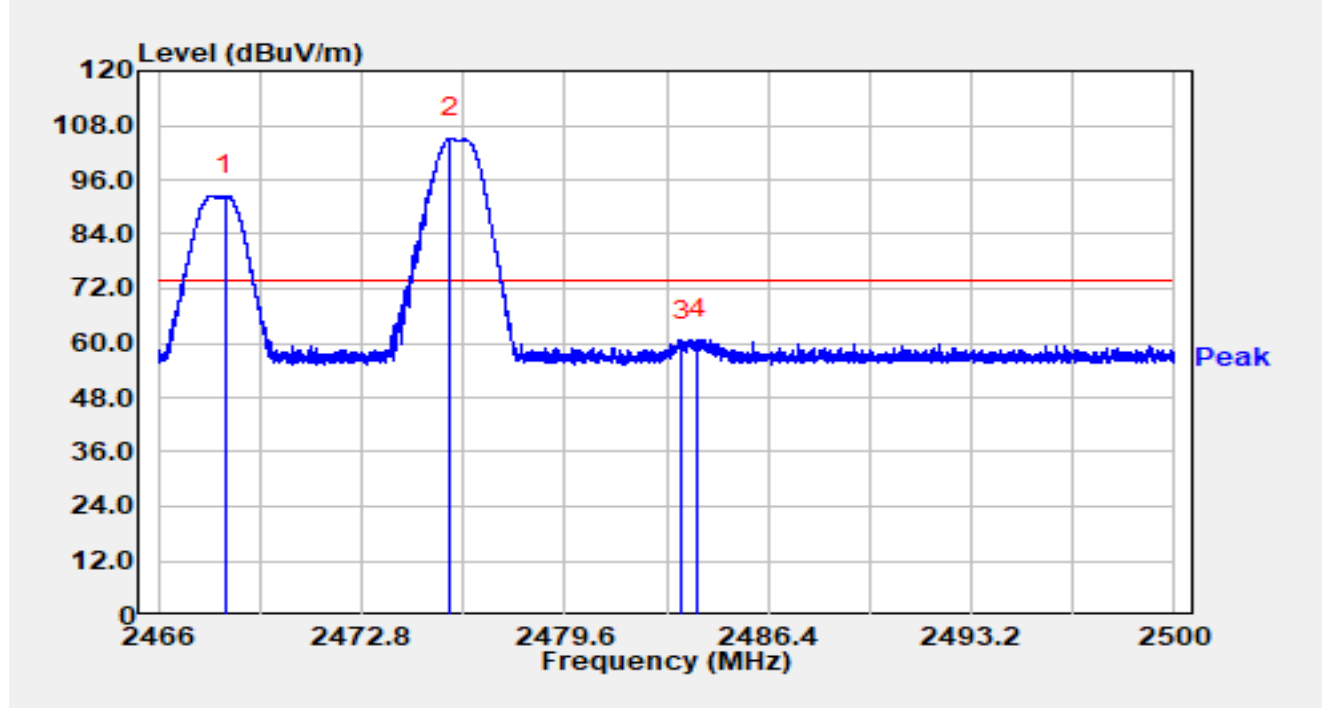


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.247        | 62.79          | 29.72      | 92.51                | N/A         | N/A            | Peak     |
| 2  |      | 2475.755        | 75.33          | 29.74      | 105.07               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 30.76          | 29.76      | 60.53                | -13.47      | 74.00          | Peak     |
| 4  | *    | 2484.034        | 31.10          | 29.77      | 60.87                | -13.13      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2476MHz |               |            |

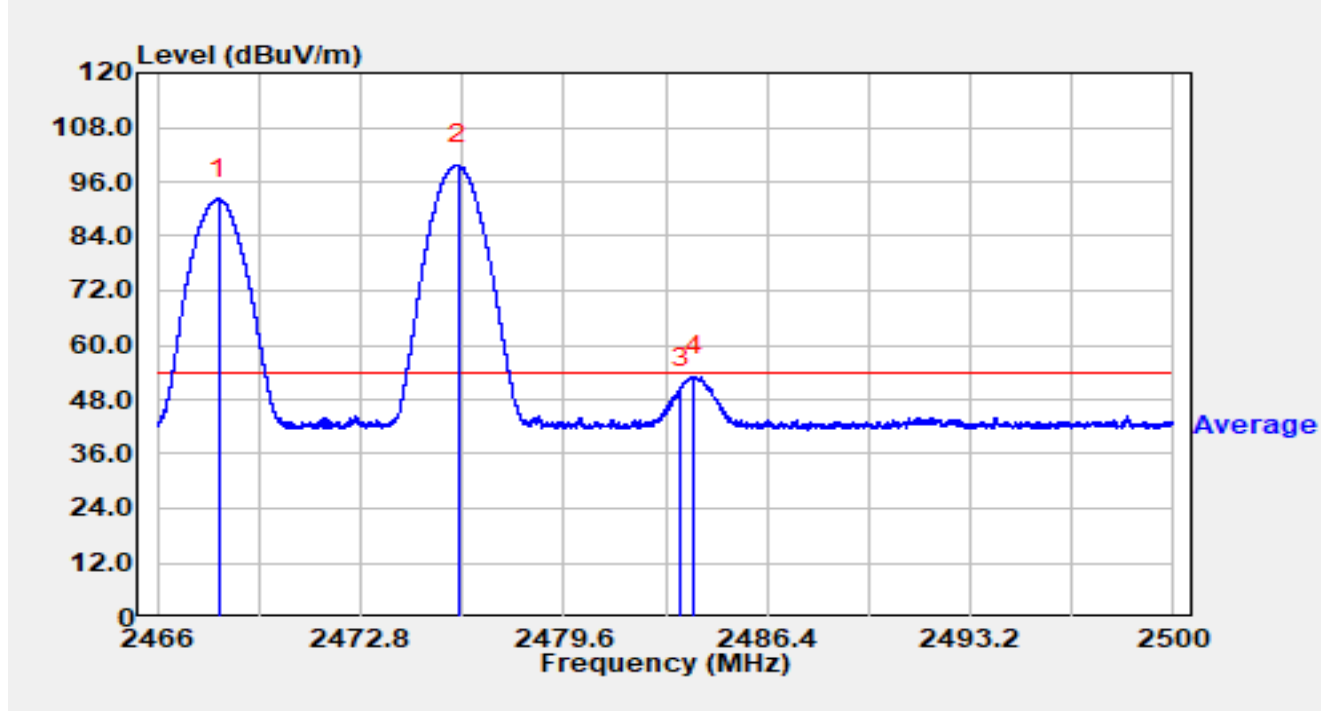


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.057        | 62.47          | 29.72      | 92.19                | N/A         | N/A            | Average  |
| 2  |      | 2476.054        | 70.09          | 29.74      | 99.83                | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 20.93          | 29.76      | 50.69                | -3.31       | 54.00          | Average  |
| 4  | *    | 2483.972        | 23.43          | 29.77      | 53.20                | -0.80       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2476MHz |               |            |

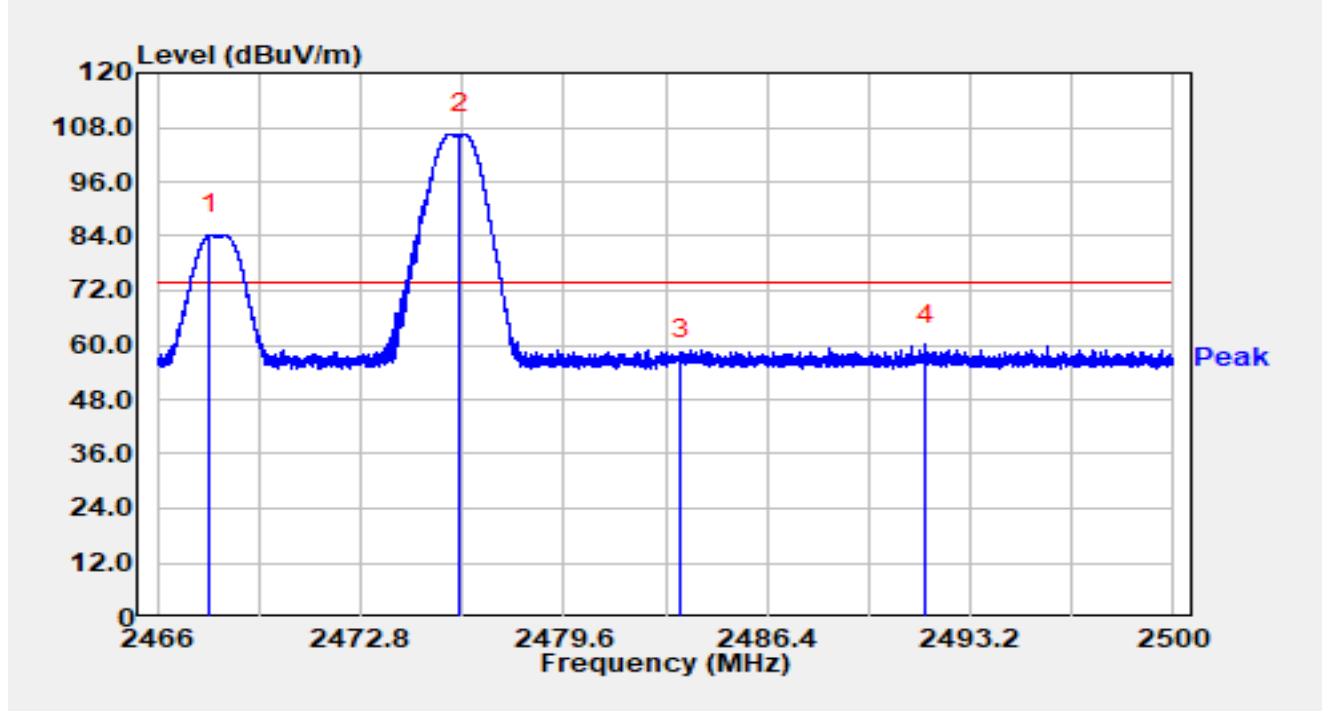


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2467.754        | 54.56          | 29.72      | 84.29                | N/A         | N/A            | Peak     |
| 2  |      | 2476.112        | 76.82          | 29.74      | 106.56               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 26.90          | 29.76      | 56.66                | -17.34      | 74.00          | Peak     |
| 4  | *    | 2491.694        | 30.27          | 29.79      | 60.07                | -13.93      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2476MHz |               |            |

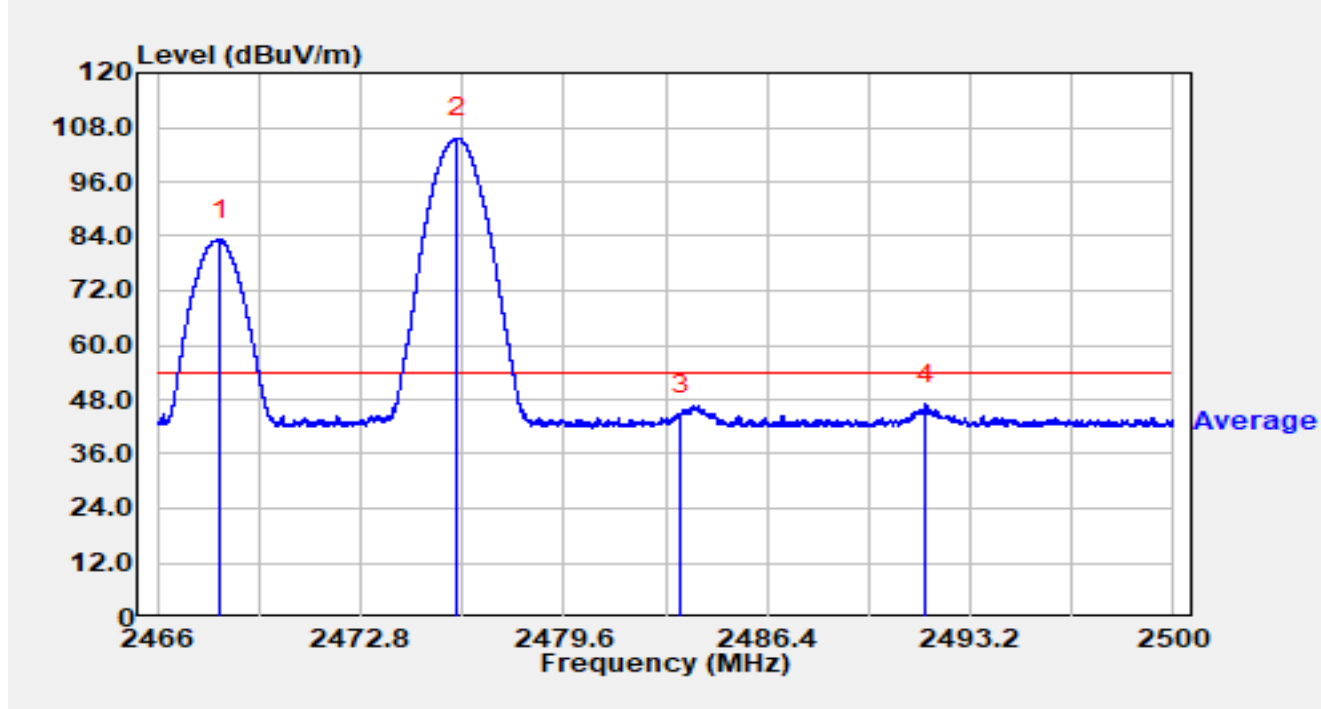


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.084        | 53.60          | 29.72      | 83.32                | N/A         | N/A            | Average  |
| 2  |      | 2476.027        | 75.85          | 29.74      | 105.59               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 14.70          | 29.76      | 44.46                | -9.54       | 54.00          | Average  |
| 4  | *    | 2491.718        | 17.18          | 29.79      | 46.98                | -7.02       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2478MHz |               |            |

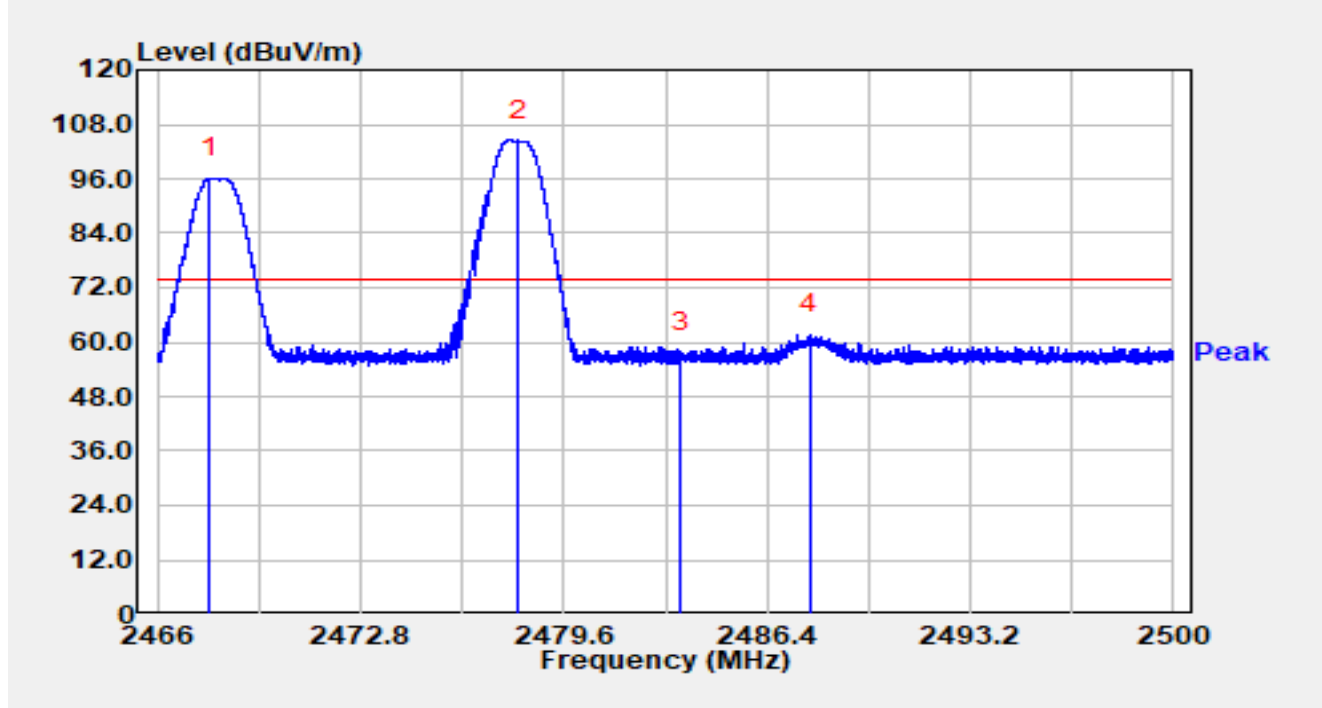


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2467.754        | 66.35          | 29.72      | 96.07                | N/A         | N/A            | Peak     |
| 2  |      | 2478.063        | 74.78          | 29.75      | 104.53               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 27.83          | 29.76      | 57.60                | -16.40      | 74.00          | Peak     |
| 4  | *    | 2487.821        | 31.94          | 29.78      | 61.72                | -12.28      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2478MHz |               |            |

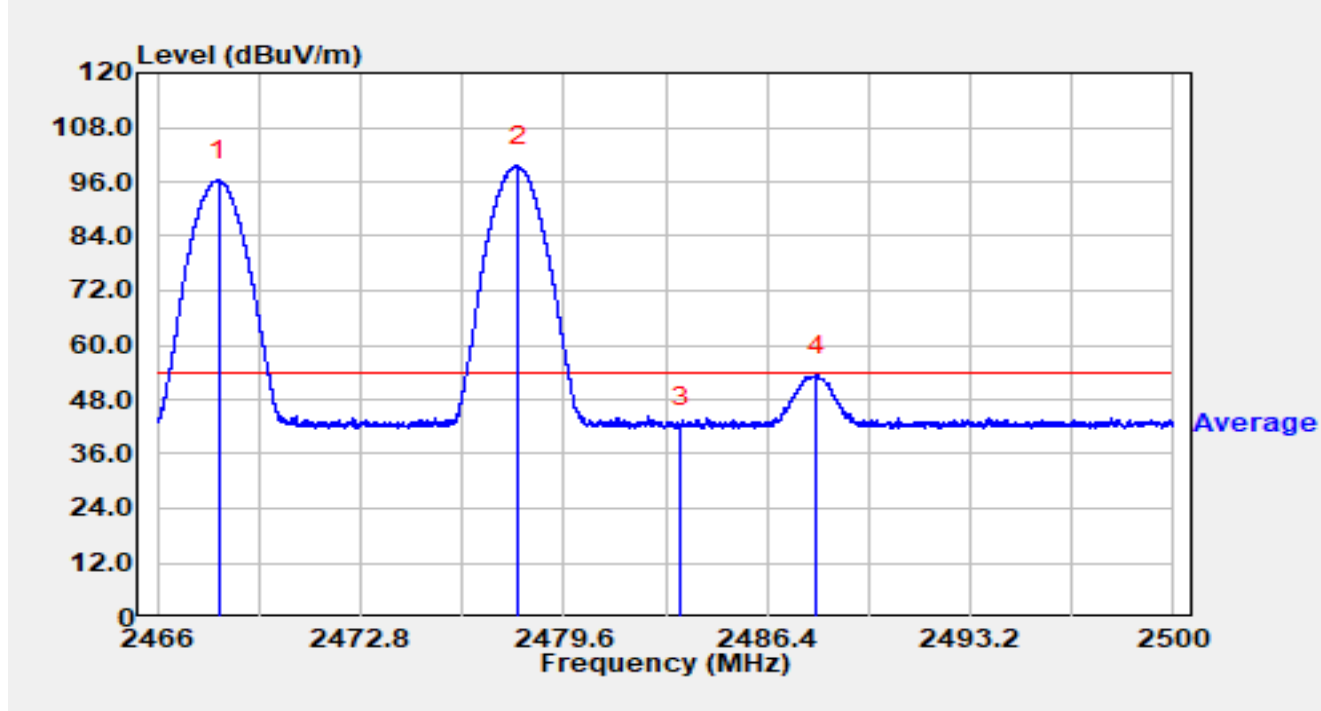


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.043        | 66.64          | 29.72      | 96.36                | N/A         | N/A            | Average  |
| 2  |      | 2478.060        | 69.69          | 29.75      | 99.43                | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.16          | 29.76      | 41.93                | -12.07      | 54.00          | Average  |
| 4  | *    | 2488.069        | 23.54          | 29.78      | 53.32                | -0.68       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2478MHz |               |            |

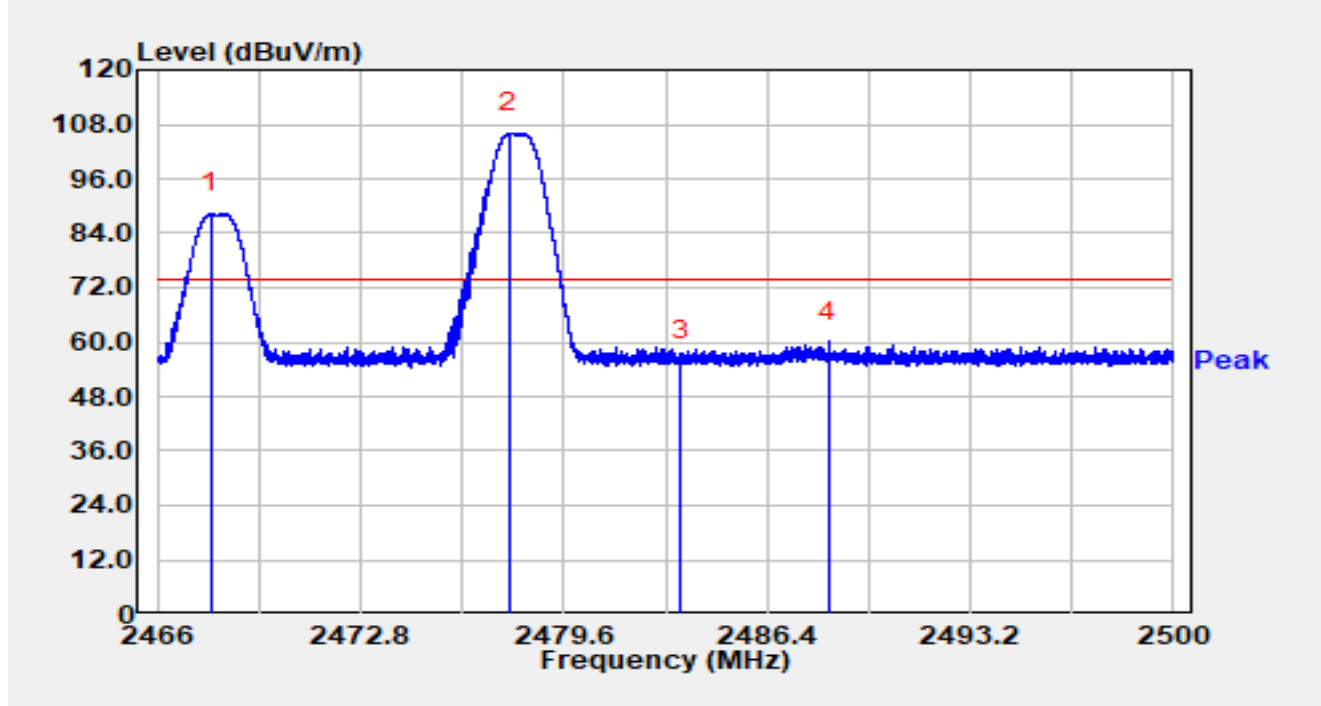


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2467.775        | 58.63          | 29.72      | 88.35                | N/A         | N/A            | Peak     |
| 2  |      | 2477.771        | 76.30          | 29.74      | 106.05               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 26.30          | 29.76      | 56.07                | -17.93      | 74.00          | Peak     |
| 4  | *    | 2488.457        | 30.32          | 29.78      | 60.10                | -13.90      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2478MHz |               |            |

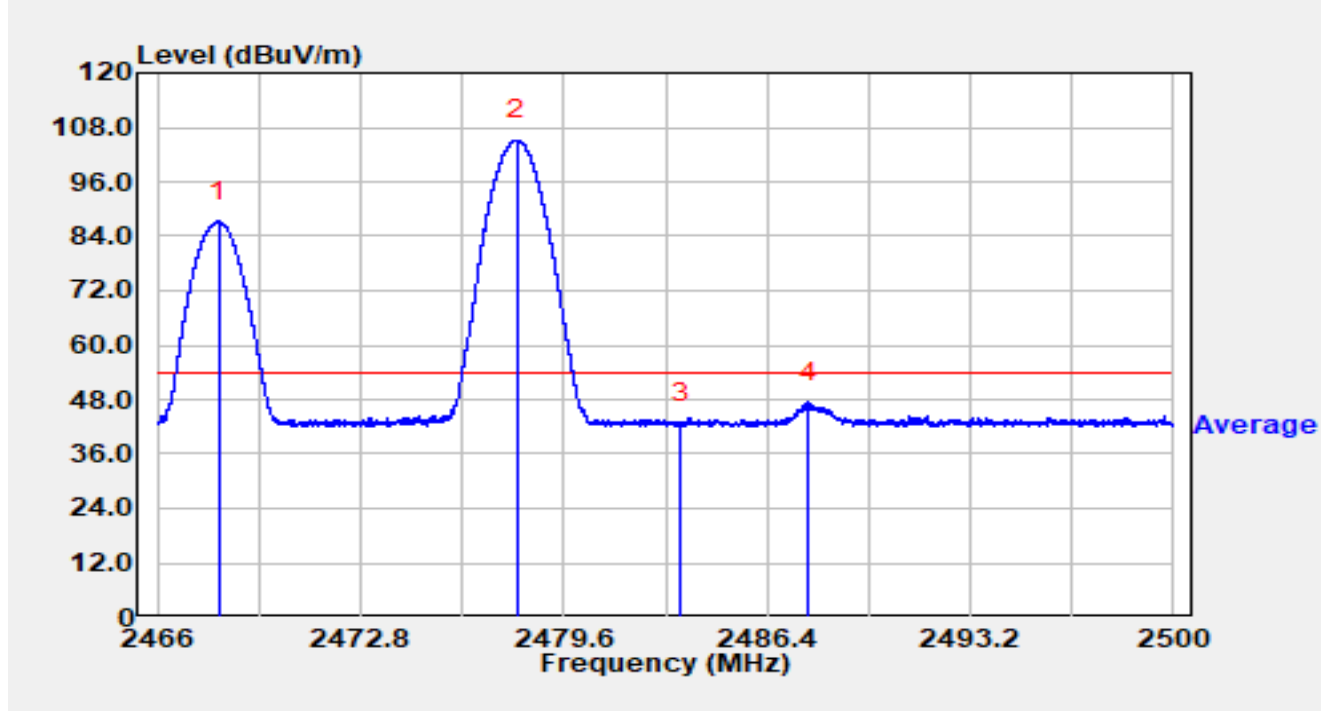


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.047        | 57.66          | 29.72      | 87.39                | N/A         | N/A            | Average  |
| 2  |      | 2478.046        | 75.39          | 29.75      | 105.13               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.99          | 29.76      | 42.76                | -11.24      | 54.00          | Average  |
| 4  | *    | 2487.804        | 17.72          | 29.78      | 47.49                | -6.51       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2478MHz |               |            |

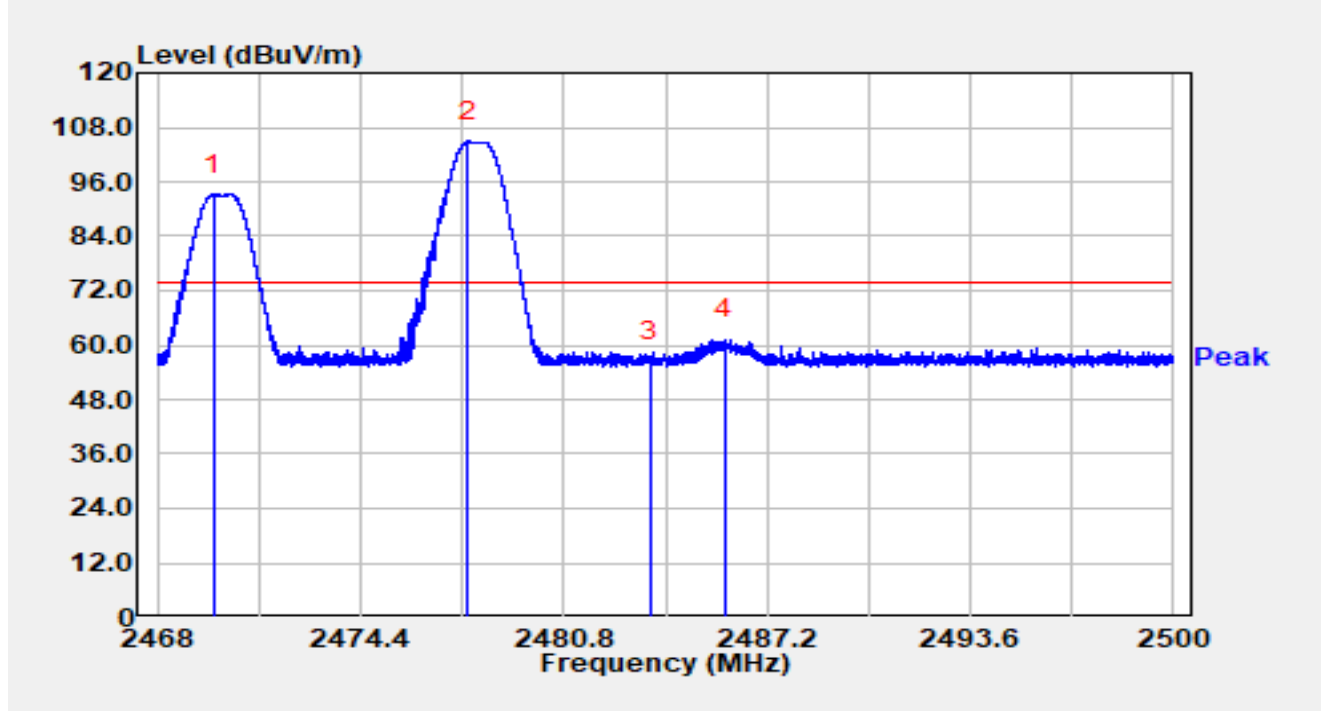


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2469.789        | 63.56          | 29.72      | 93.28                | N/A         | N/A            | Peak     |
| 2  |      | 2477.779        | 75.14          | 29.74      | 104.88               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 26.54          | 29.76      | 56.30                | -17.70      | 74.00          | Peak     |
| 4  | *    | 2485.882        | 31.40          | 29.77      | 61.18                | -12.82      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2478MHz |               |            |

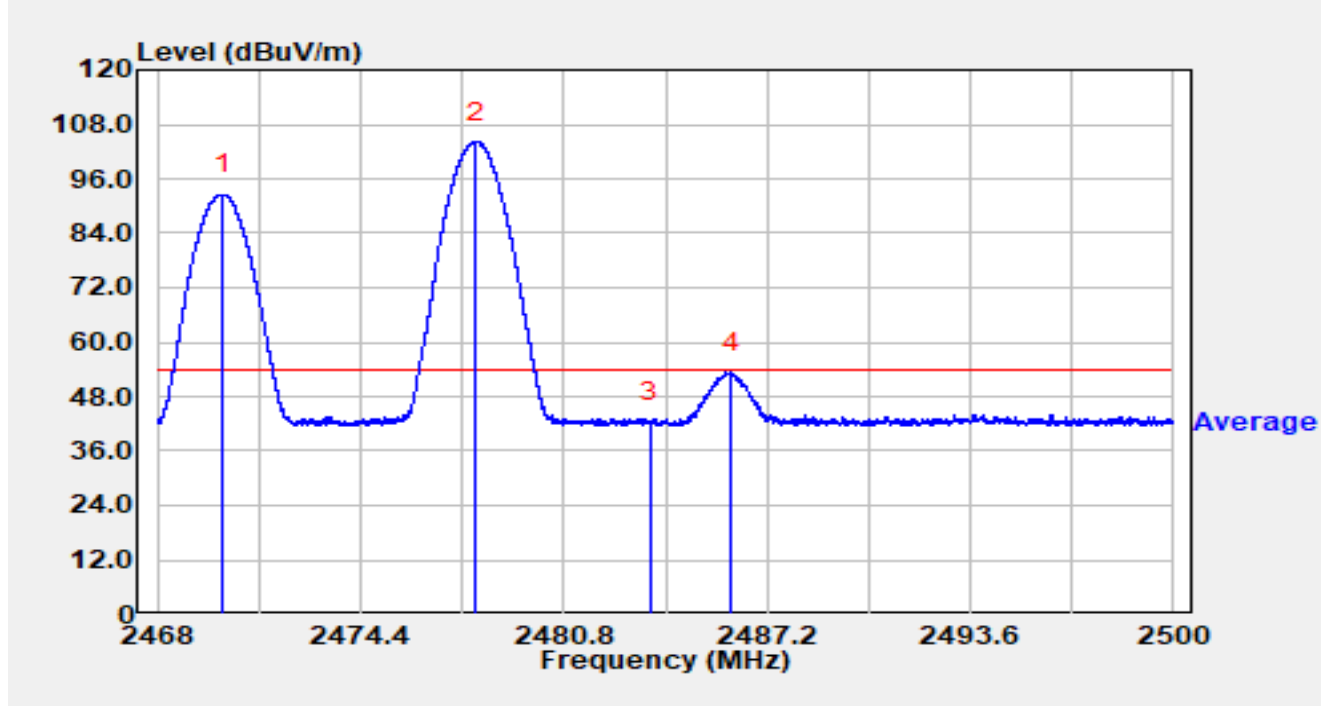


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2470.064        | 62.87          | 29.72      | 92.59                | N/A         | N/A            | Average  |
| 2  |      | 2478.048        | 74.36          | 29.75      | 104.10               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.58          | 29.76      | 42.34                | -11.66      | 54.00          | Average  |
| 4  | *    | 2486.067        | 23.55          | 29.77      | 53.32                | -0.68       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2478MHz |               |            |

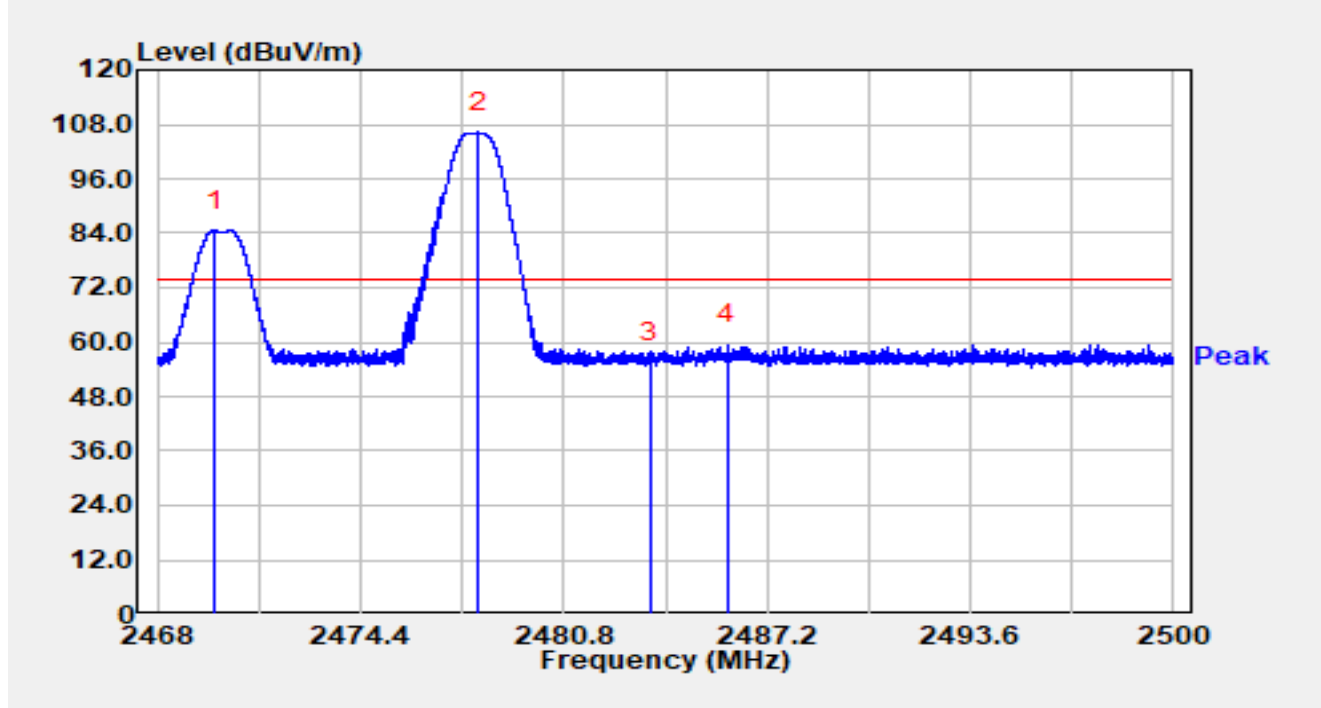


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2469.824        | 54.88          | 29.72      | 84.61                | N/A         | N/A            | Peak     |
| 2  |      | 2478.109        | 76.45          | 29.75      | 106.20               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 25.65          | 29.76      | 55.41                | -18.59      | 74.00          | Peak     |
| 4  | *    | 2485.936        | 29.61          | 29.77      | 59.38                | -14.62      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2478MHz |               |            |

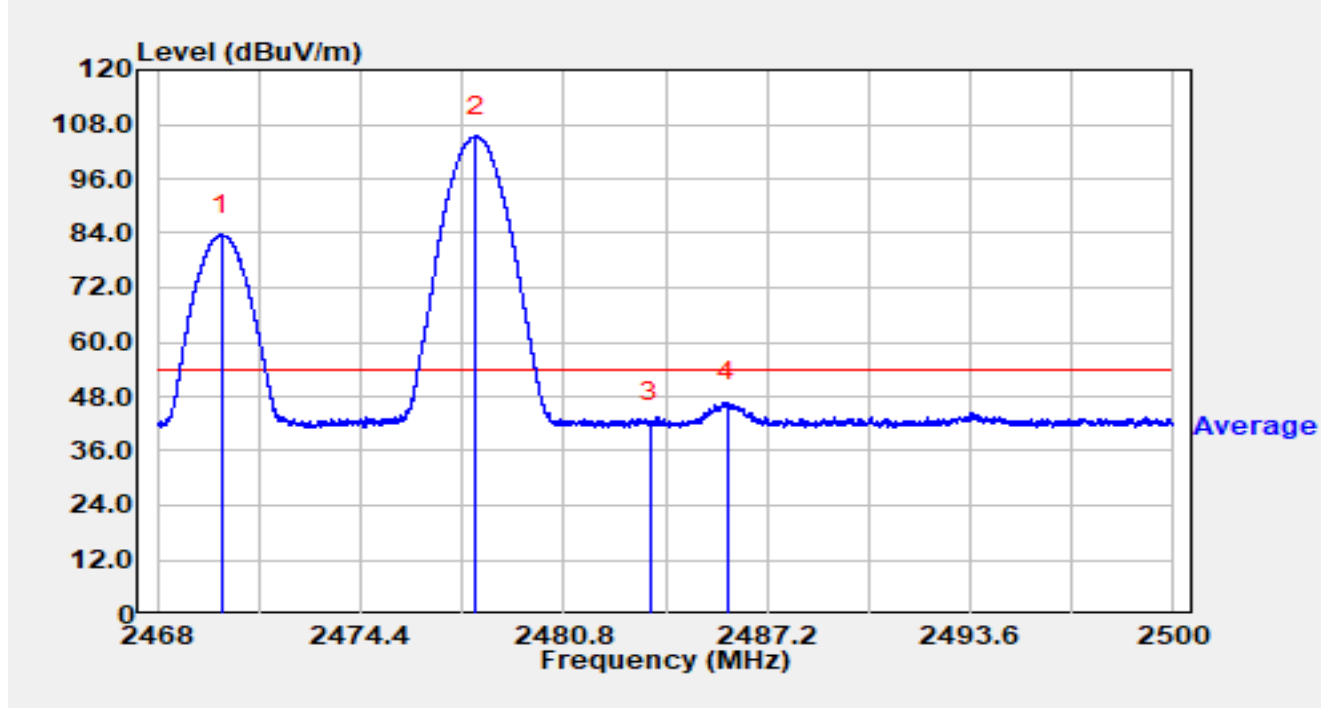


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2470.032        | 53.92          | 29.72      | 83.65                | N/A         | N/A            | Average  |
| 2  |      | 2478.045        | 75.60          | 29.75      | 105.34               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.40          | 29.76      | 42.17                | -11.83      | 54.00          | Average  |
| 4  | *    | 2485.952        | 17.02          | 29.77      | 46.79                | -7.21       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2478MHz |               |            |

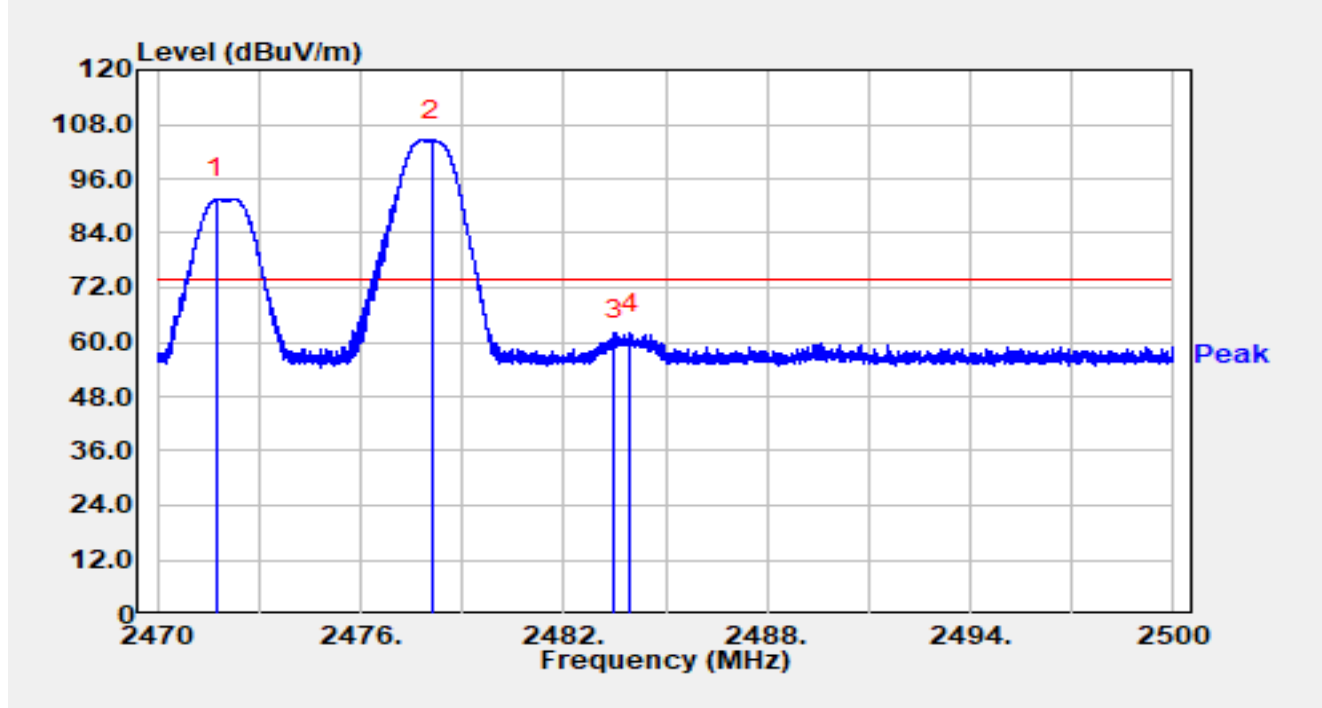


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2471.728        | 61.82          | 29.73      | 91.54                | N/A         | N/A            | Peak     |
| 2  |      | 2478.094        | 74.79          | 29.75      | 104.54               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 30.59          | 29.76      | 60.36                | -13.64      | 74.00          | Peak     |
| 4  | *    | 2483.941        | 32.23          | 29.77      | 62.00                | -12.00      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2478MHz |               |            |

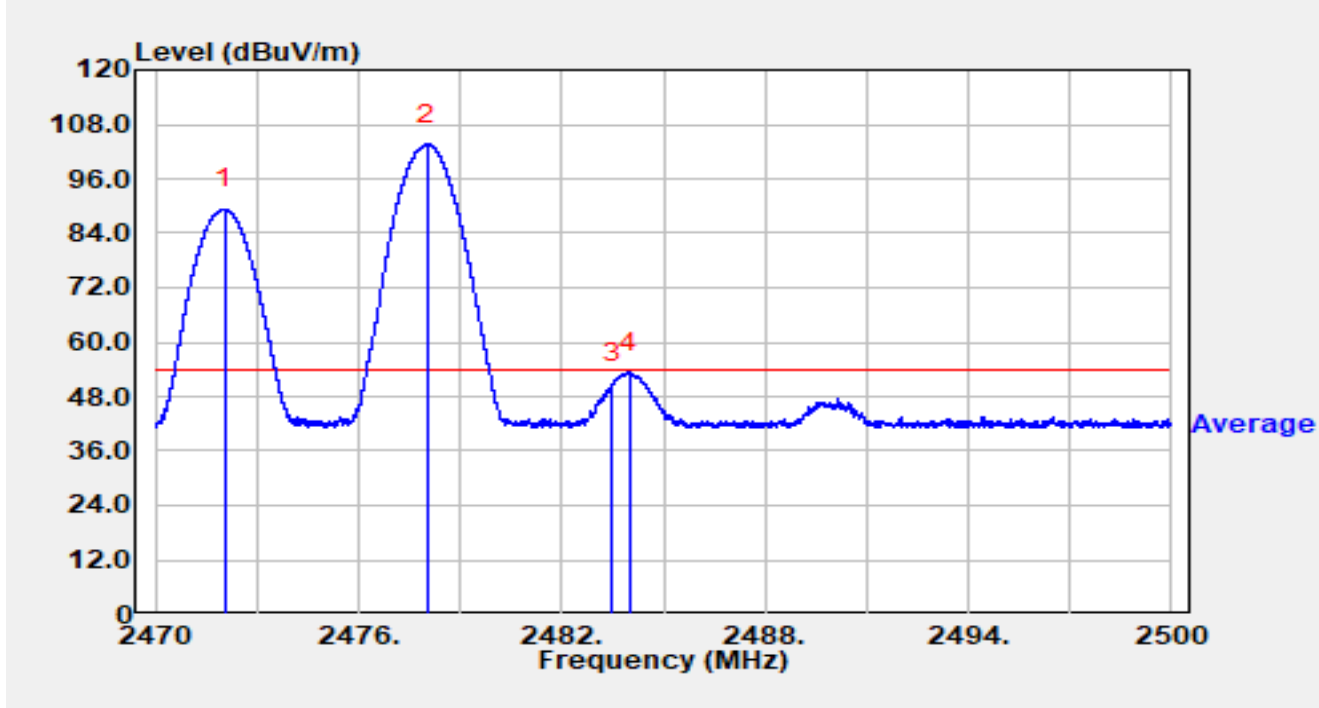


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2472.049        | 59.55          | 29.73      | 89.27                | N/A         | N/A            | Average  |
| 2  |      | 2478.022        | 73.89          | 29.74      | 103.63               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 20.98          | 29.76      | 50.75                | -3.25       | 54.00          | Average  |
| 4  | *    | 2483.986        | 23.52          | 29.77      | 53.29                | -0.71       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2478MHz |               |            |

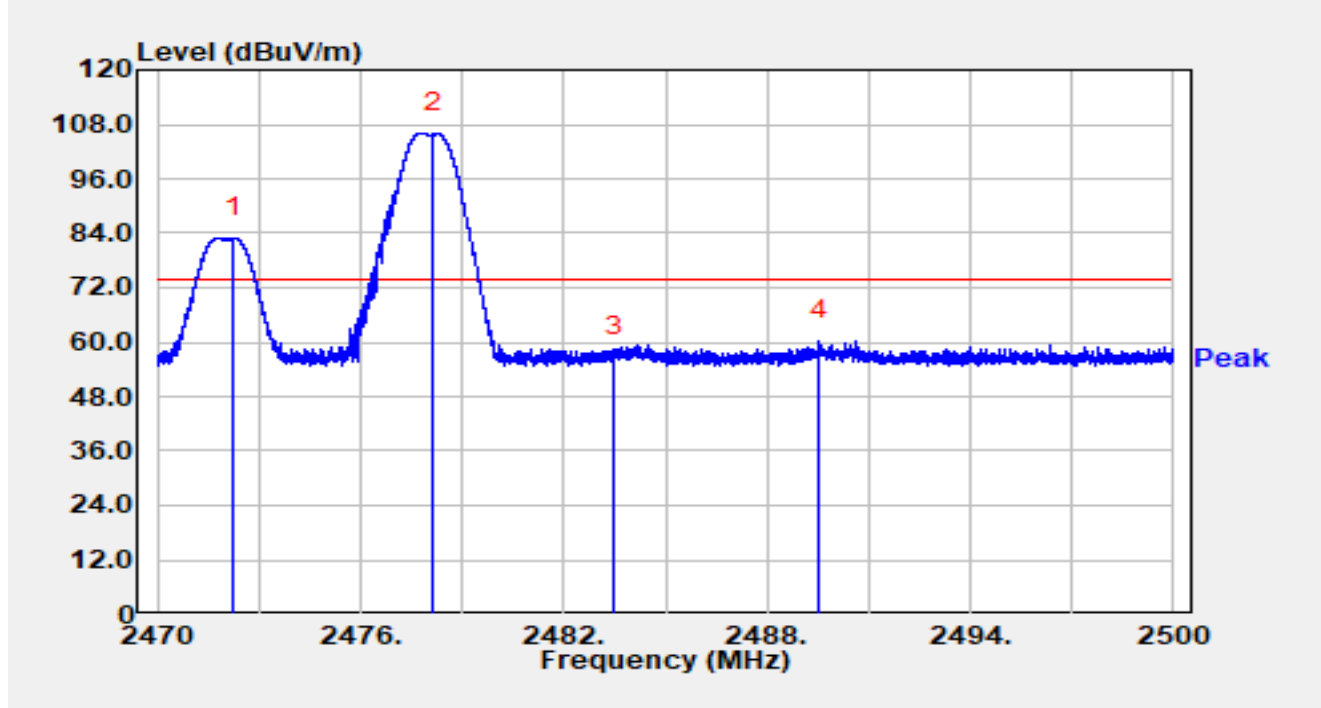


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2472.244        | 53.31          | 29.73      | 83.04                | N/A         | N/A            | Peak     |
| 2  |      | 2478.145        | 76.30          | 29.75      | 106.05               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 27.06          | 29.76      | 56.82                | -17.18      | 74.00          | Peak     |
| 4  | *    | 2489.539        | 30.61          | 29.78      | 60.39                | -13.61      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2478MHz |               |            |

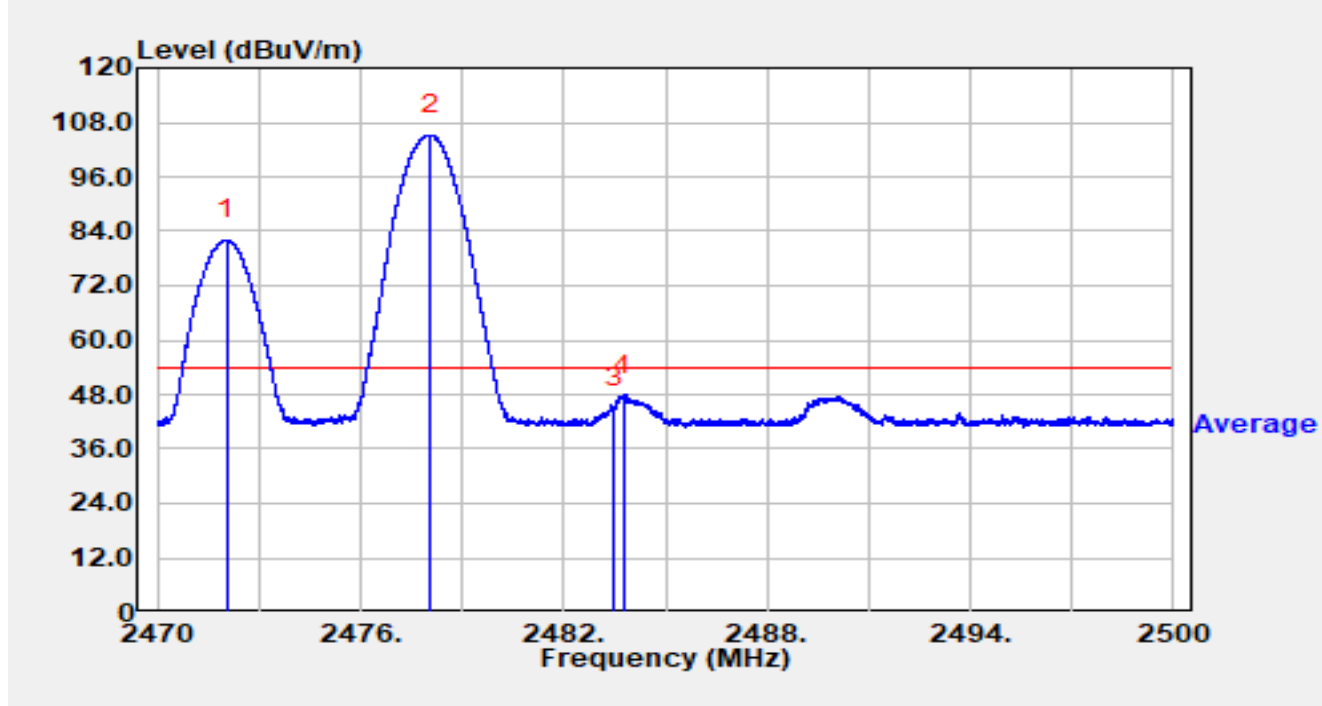


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2472.049        | 52.30          | 29.73      | 82.03                | N/A         | N/A            | Average  |
| 2  |      | 2478.064        | 75.45          | 29.75      | 105.19               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 15.16          | 29.76      | 44.93                | -9.07       | 54.00          | Average  |
| 4  | *    | 2483.773        | 18.19          | 29.76      | 47.95                | -6.05       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2480MHz |               |            |

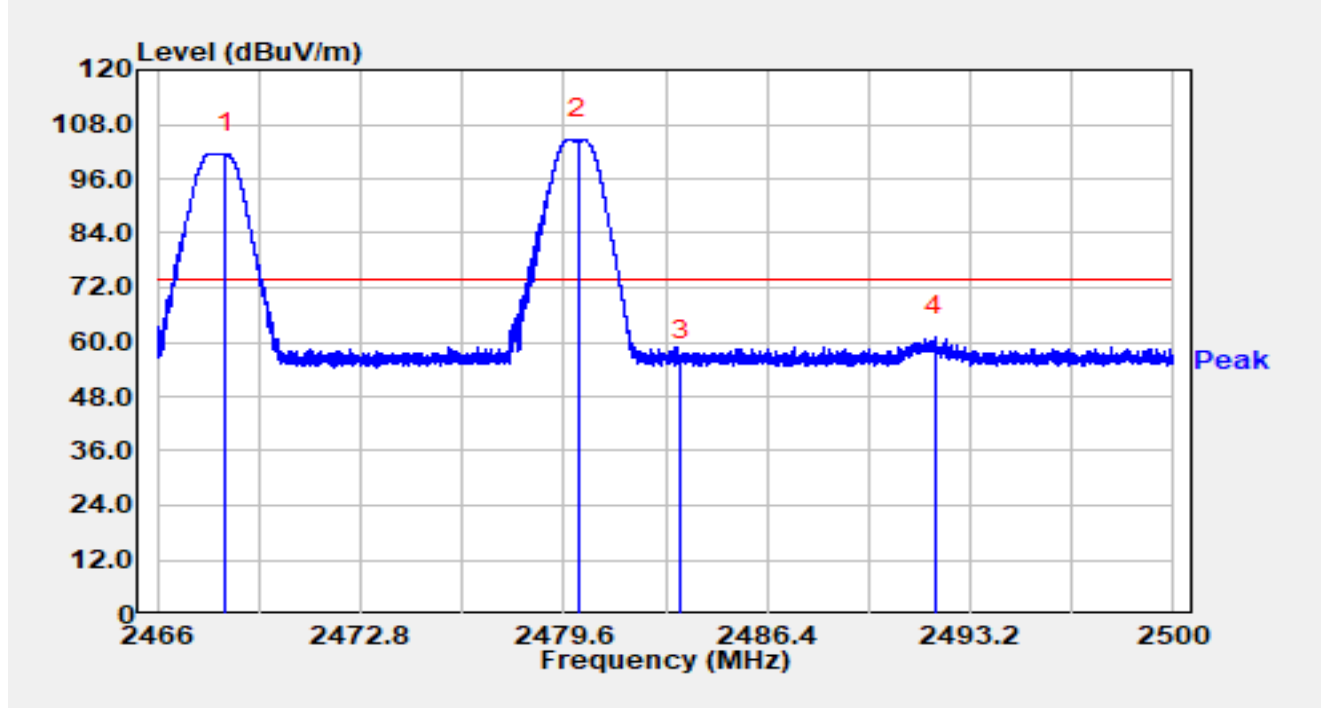


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.271        | 71.91          | 29.72      | 101.63               | N/A         | N/A            | Peak     |
| 2  |      | 2480.063        | 75.02          | 29.75      | 104.77               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 26.22          | 29.76      | 55.99                | -18.01      | 74.00          | Peak     |
| 4  | *    | 2492.007        | 31.44          | 29.79      | 61.23                | -12.77      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2480MHz |               |            |

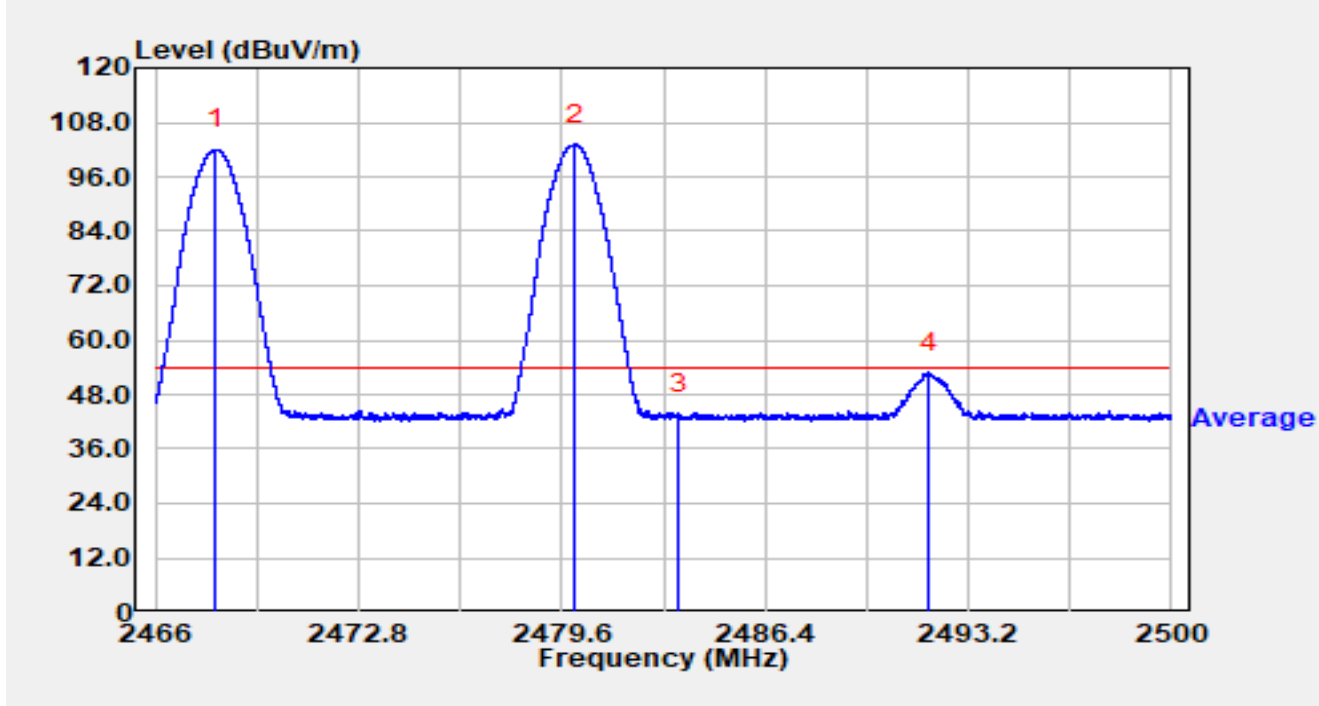


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.010        | 72.37          | 29.72      | 102.10               | N/A         | N/A            | Average  |
| 2  |      | 2480.032        | 73.36          | 29.75      | 103.11               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 13.79          | 29.76      | 43.55                | -10.45      | 54.00          | Average  |
| 4  | *    | 2491.905        | 23.01          | 29.79      | 52.80                | -1.20       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2480MHz |               |            |

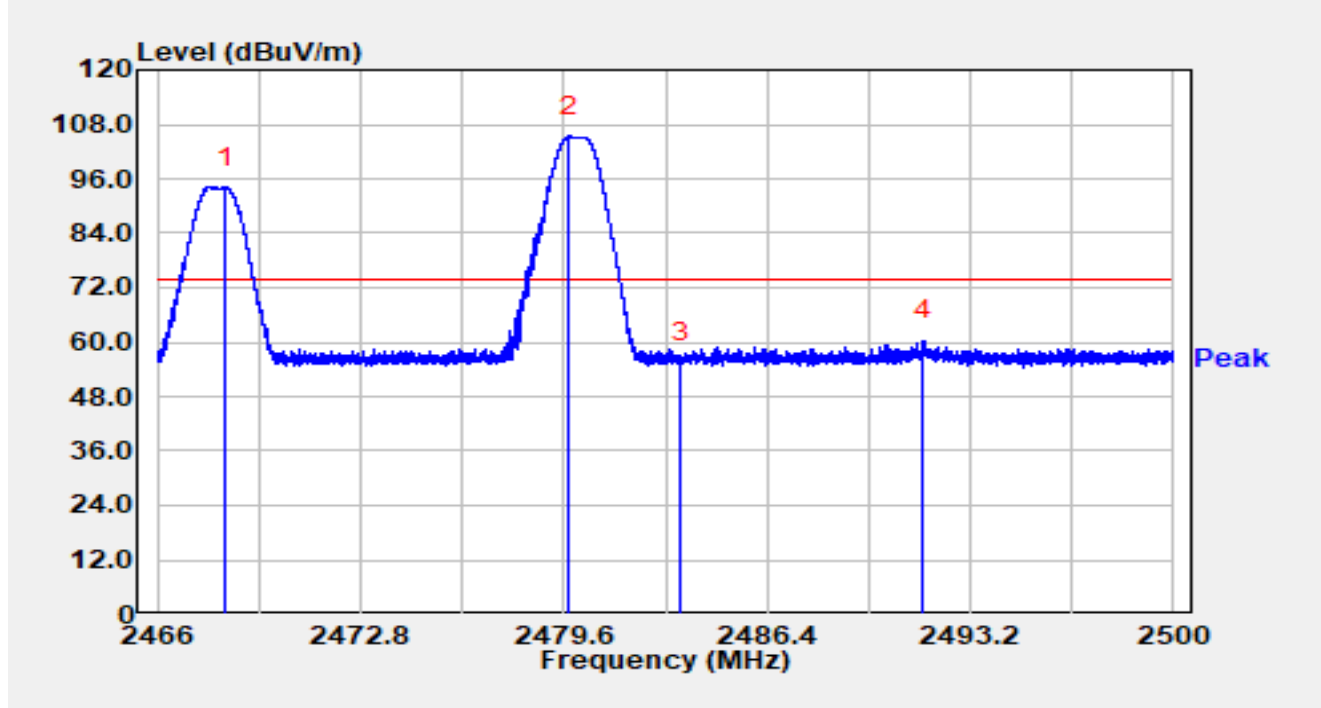


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.278        | 64.40          | 29.72      | 94.12                | N/A         | N/A            | Peak     |
| 2  |      | 2479.770        | 75.61          | 29.75      | 105.36               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 25.68          | 29.76      | 55.44                | -18.56      | 74.00          | Peak     |
| 4  | *    | 2491.605        | 30.47          | 29.79      | 60.27                | -13.73      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-10 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2468MHz Core1 2480MHz |               |            |

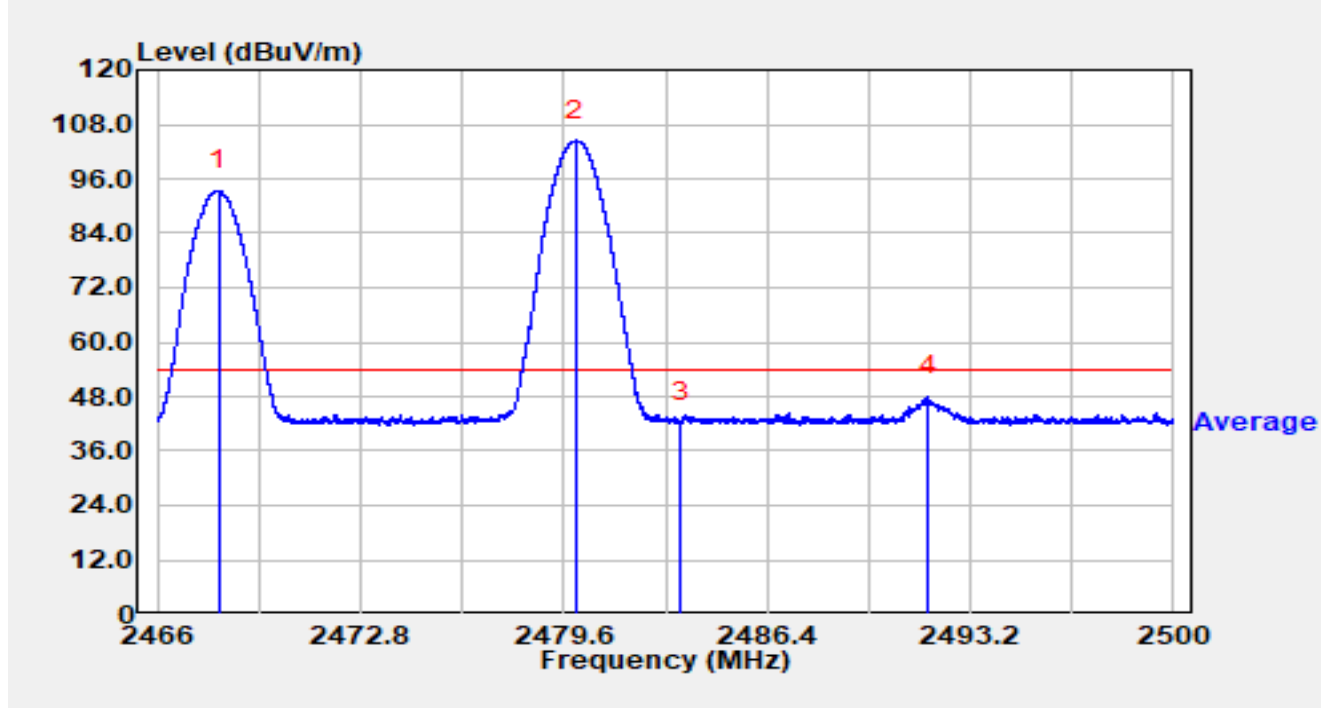


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2468.057        | 63.59          | 29.72      | 93.31                | N/A         | N/A            | Average  |
| 2  |      | 2480.001        | 74.66          | 29.75      | 104.41               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.63          | 29.76      | 42.39                | -11.61      | 54.00          | Average  |
| 4  | *    | 2491.789        | 18.33          | 29.79      | 48.12                | -5.88       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2480MHz |               |            |

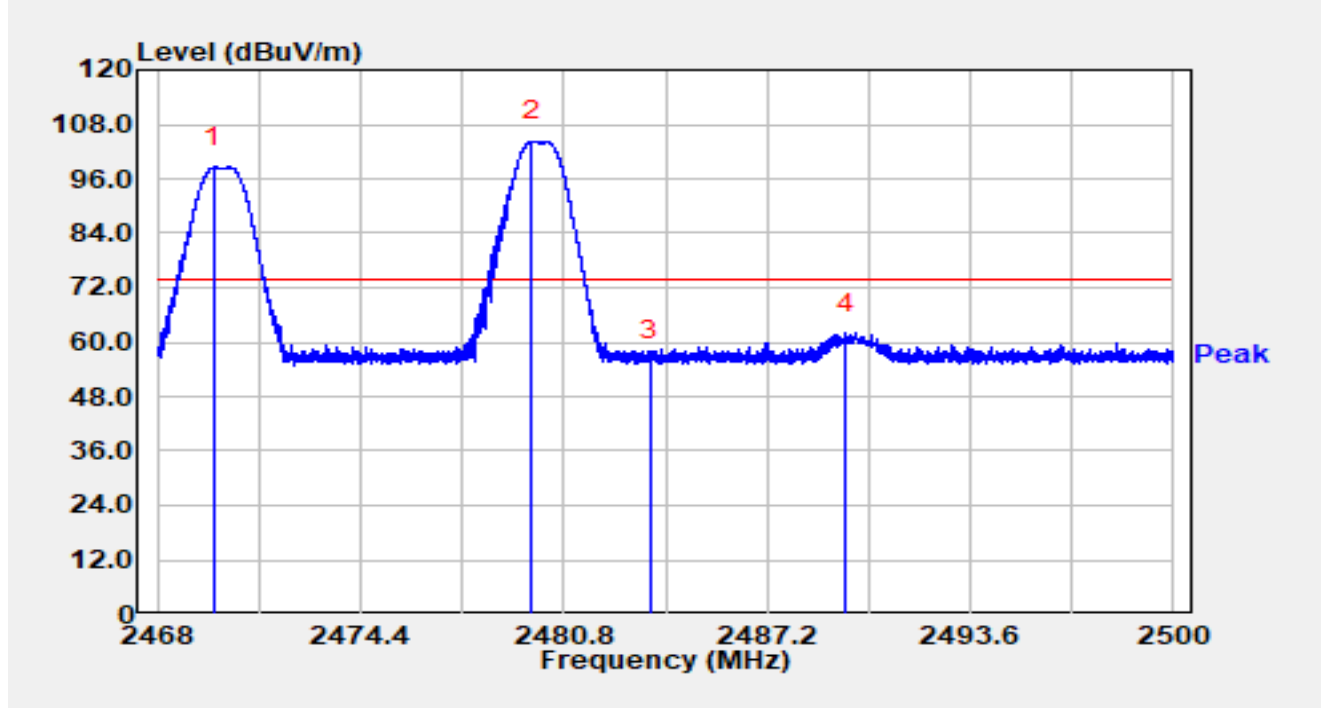


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2469.773        | 68.87          | 29.72      | 98.60                | N/A         | N/A            | Peak     |
| 2  |      | 2479.776        | 74.48          | 29.75      | 104.23               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 25.96          | 29.76      | 55.72                | -18.28      | 74.00          | Peak     |
| 4  | *    | 2489.680        | 32.22          | 29.79      | 62.01                | -11.99      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2480MHz |               |            |

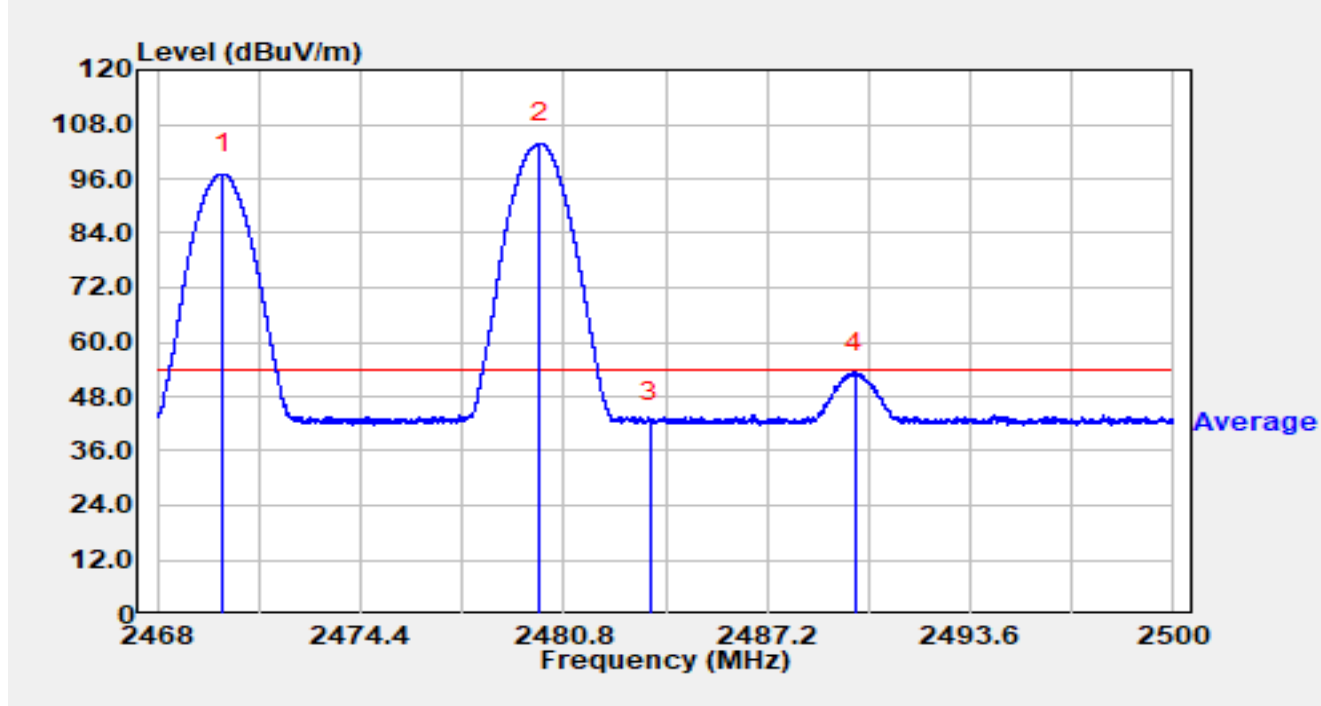


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2470.064        | 67.30          | 29.72      | 97.03                | N/A         | N/A            | Average  |
| 2  |      | 2480.042        | 74.03          | 29.75      | 103.79               | N/A         | N/A            | Average  |
| 3  |      | 2483.501        | 12.39          | 29.76      | 42.15                | -11.85      | 54.00          | Average  |
| 4  | *    | 2489.978        | 23.52          | 29.79      | 53.30                | -0.70       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2480MHz |               |            |

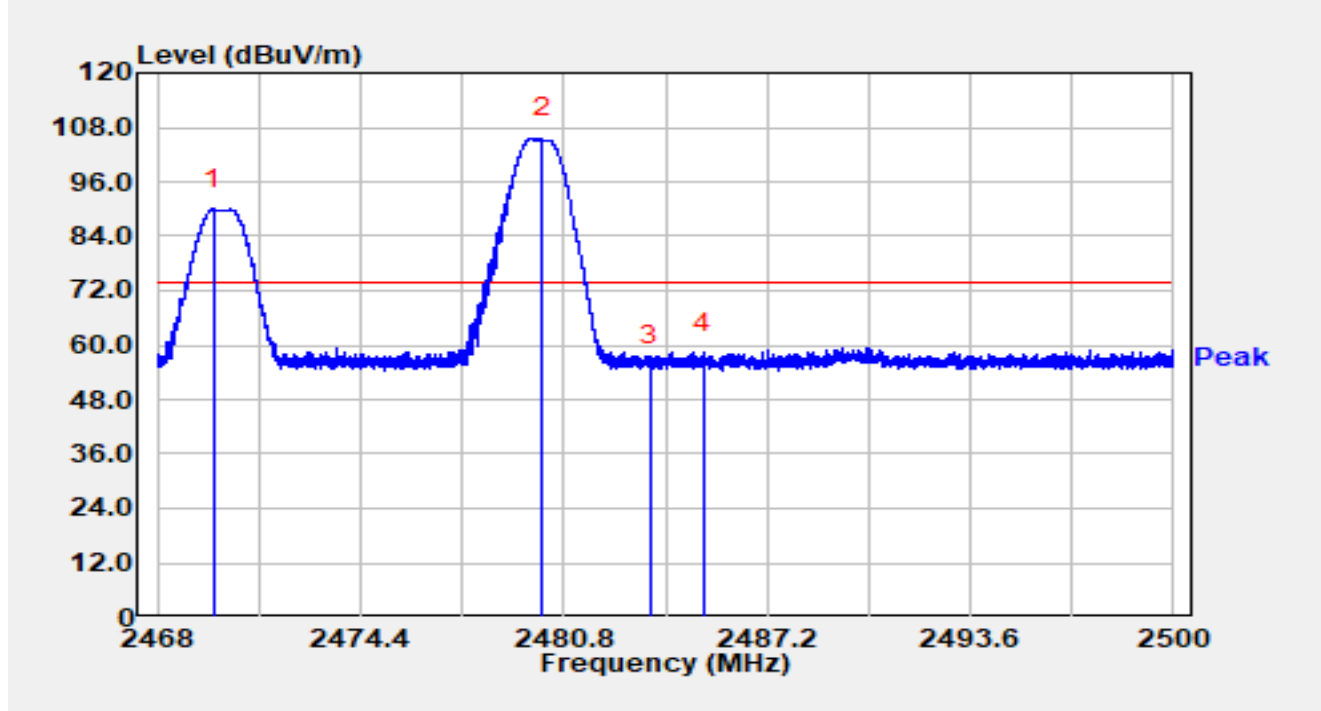


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2469.754        | 60.21          | 29.72      | 89.93                | N/A         | N/A            | Peak     |
| 2  |      | 2480.115        | 75.77          | 29.75      | 105.52               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 25.92          | 29.76      | 55.69                | -18.31      | 74.00          | Peak     |
| 4  | *    | 2485.190        | 28.59          | 29.77      | 58.36                | -15.64      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2470MHz Core1 2480MHz |               |            |

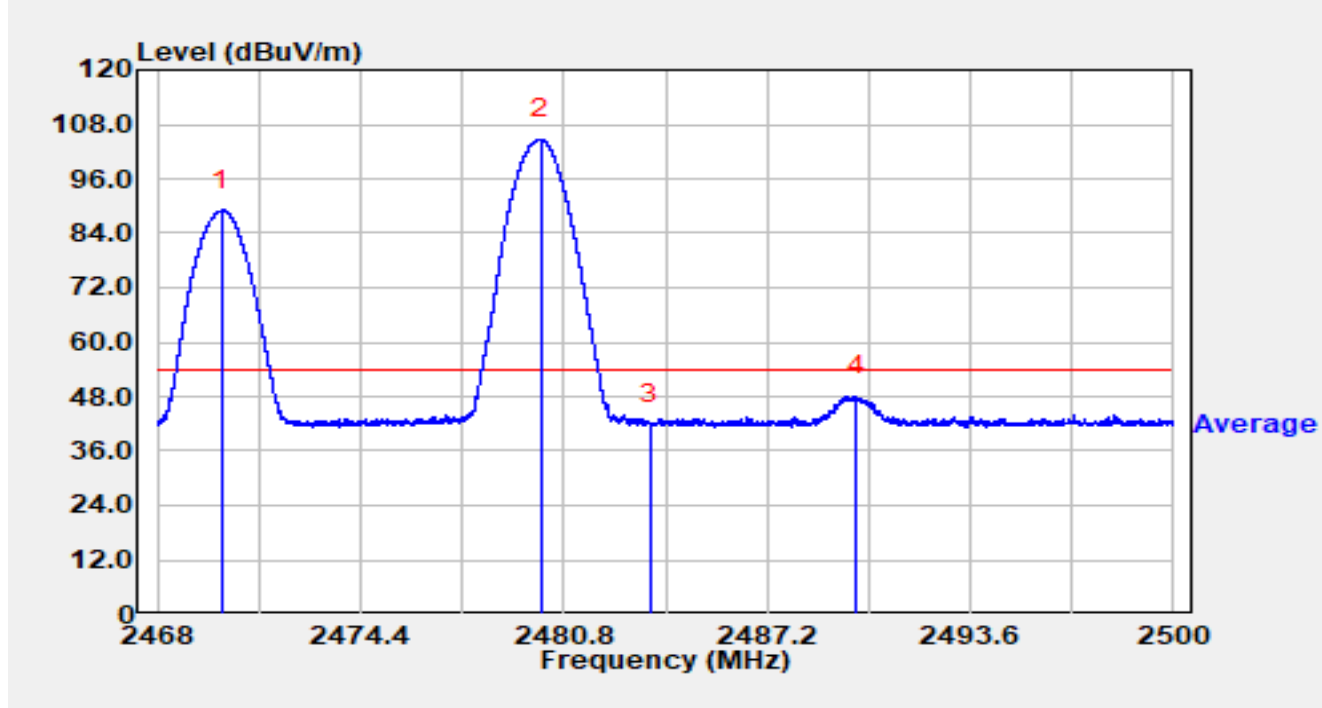


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2470.035        | 59.30          | 29.72      | 89.02                | N/A         | N/A            | Average  |
| 2  |      | 2480.083        | 74.90          | 29.75      | 104.65               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.21          | 29.76      | 41.97                | -12.03      | 54.00          | Average  |
| 4  | *    | 2490.003        | 18.32          | 29.79      | 48.10                | -5.90       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2480MHz |               |            |

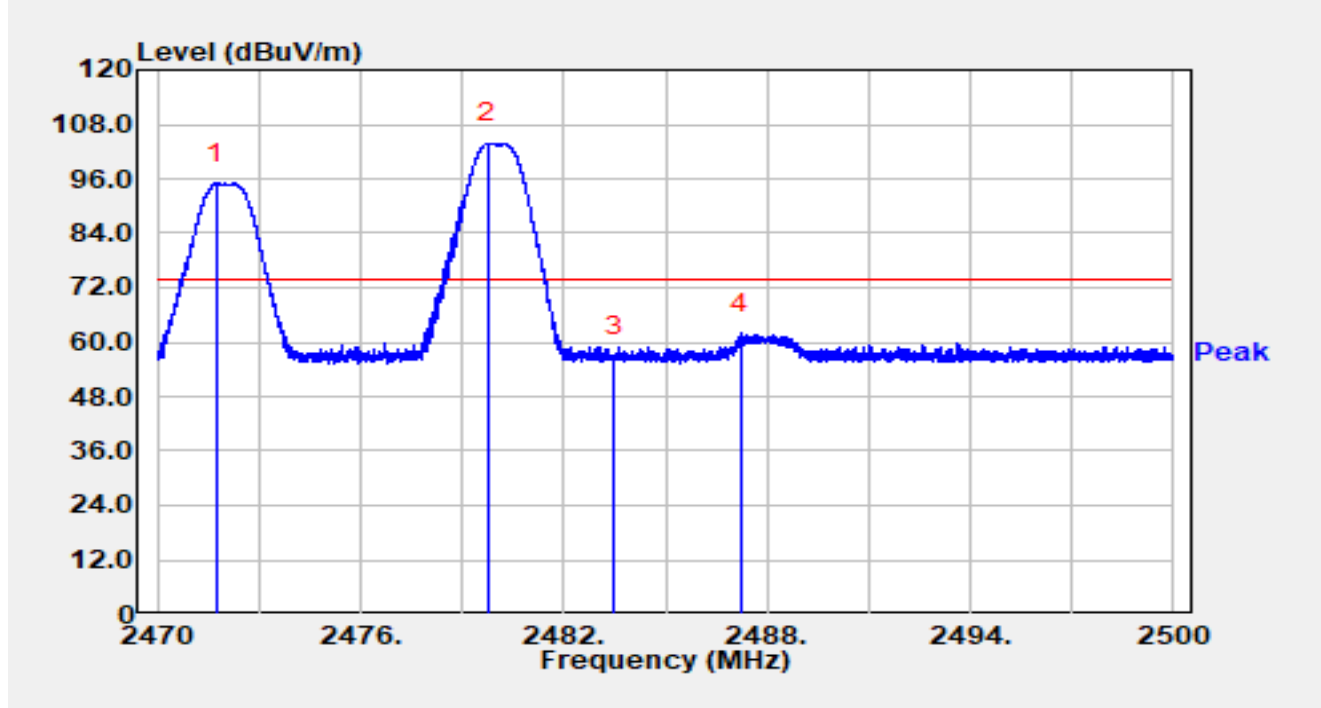


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2471.737        | 65.25          | 29.73      | 94.97                | N/A         | N/A            | Peak     |
| 2  |      | 2479.765        | 74.07          | 29.75      | 103.82               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 26.93          | 29.76      | 56.70                | -17.30      | 74.00          | Peak     |
| 4  | *    | 2487.205        | 32.05          | 29.78      | 61.83                | -12.17      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2480MHz |               |            |

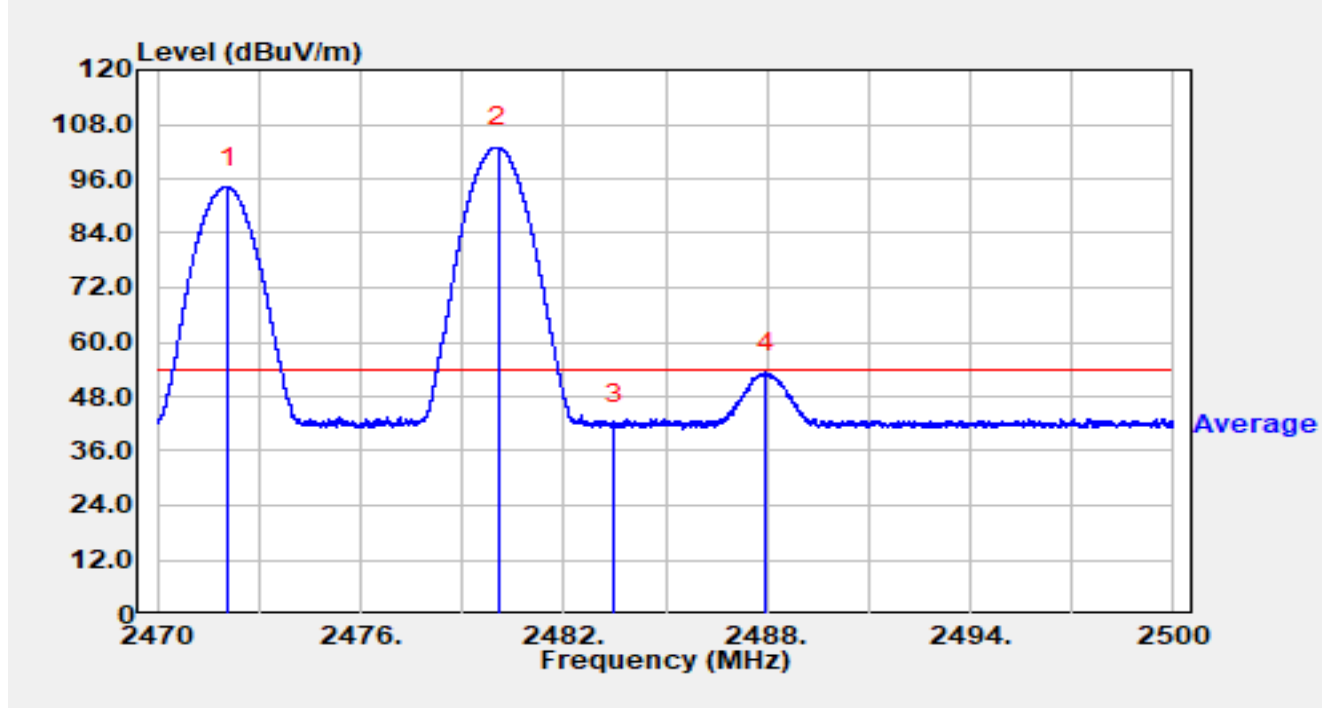


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2472.100        | 64.43          | 29.73      | 94.16                | N/A         | N/A            | Average  |
| 2  |      | 2480.062        | 73.24          | 29.75      | 102.99               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.23          | 29.76      | 41.99                | -12.01      | 54.00          | Average  |
| 4  | *    | 2487.958        | 23.47          | 29.78      | 53.25                | -0.75       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2480MHz |               |            |

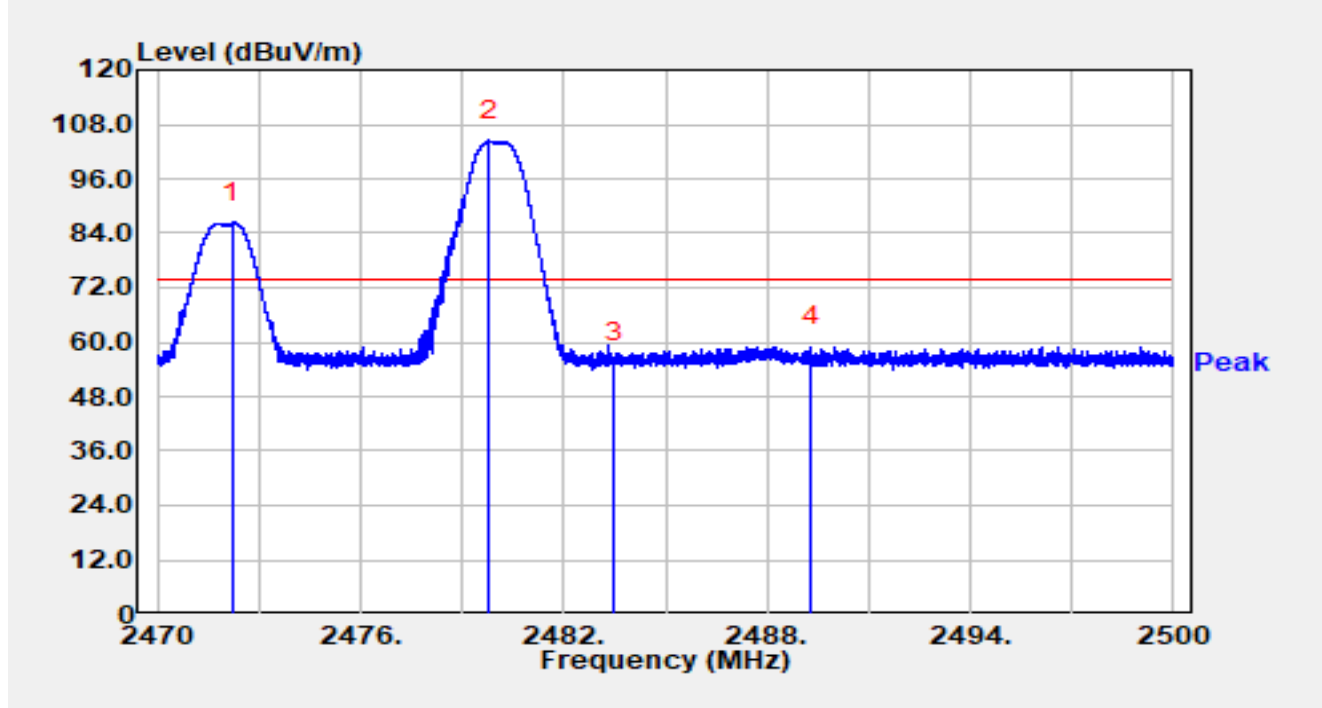


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2472.217        | 56.58          | 29.73      | 86.31                | N/A         | N/A            | Peak     |
| 2  |      | 2479.786        | 74.64          | 29.75      | 104.39               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 25.83          | 29.76      | 55.60                | -18.40      | 74.00          | Peak     |
| 4  | *    | 2489.293        | 29.27          | 29.78      | 59.05                | -14.95      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2472MHz Core1 2480MHz |               |            |

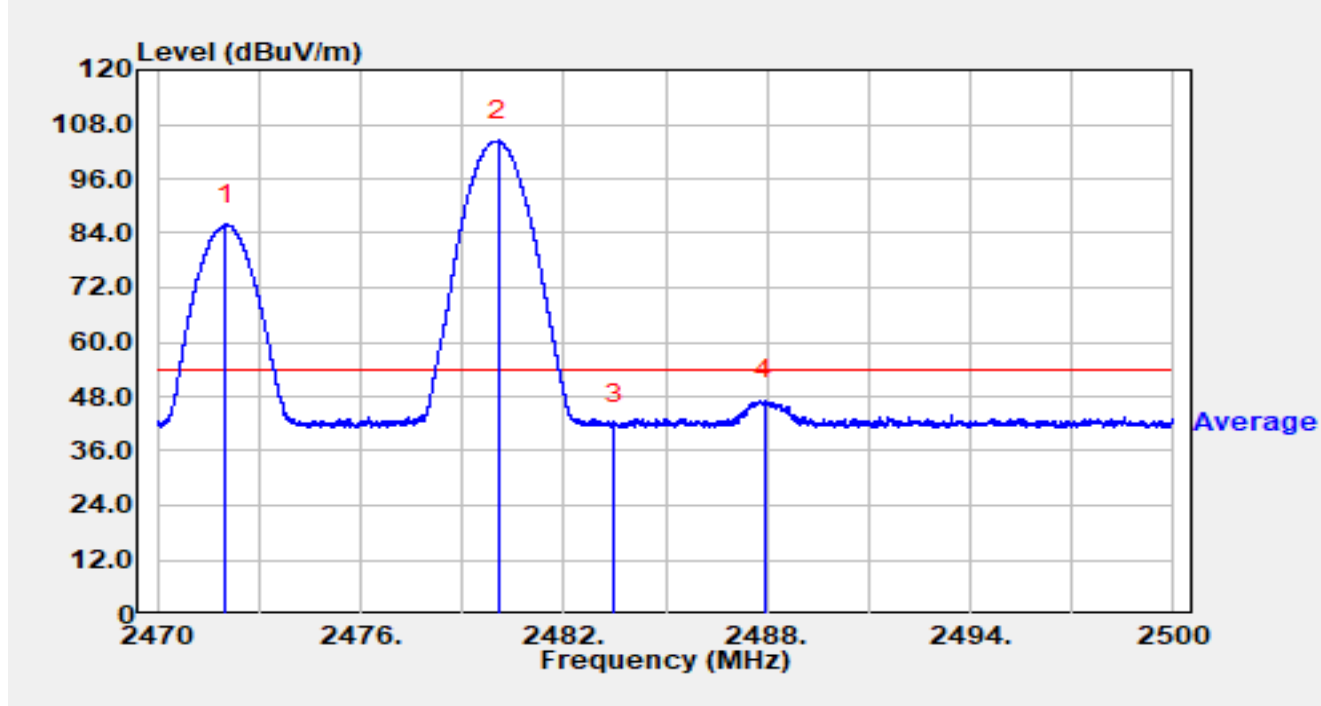


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2472.028        | 56.15          | 29.73      | 85.88                | N/A         | N/A            | Average  |
| 2  |      | 2480.071        | 74.64          | 29.75      | 104.39               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.02          | 29.76      | 41.78                | -12.22      | 54.00          | Average  |
| 4  | *    | 2487.940        | 17.39          | 29.78      | 47.17                | -6.83       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2474MHz Core1 2480MHz |               |            |

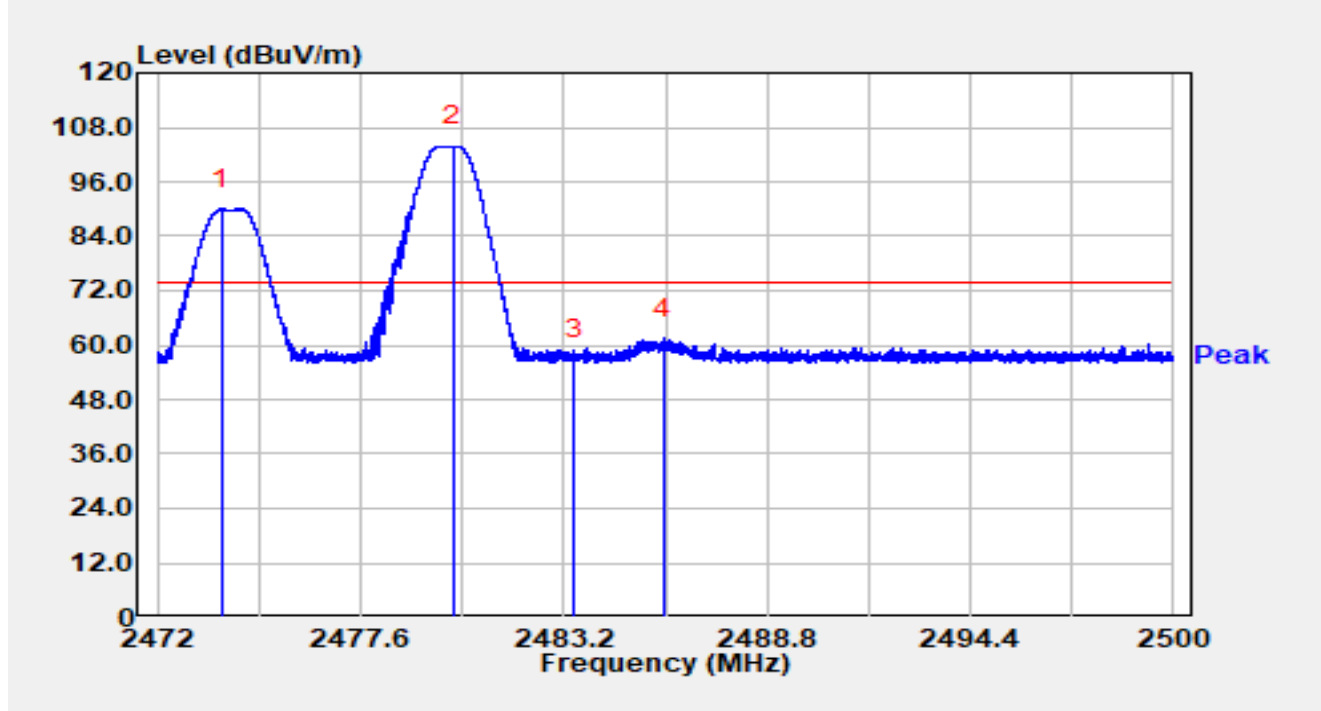


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2473.772        | 60.31          | 29.73      | 90.04                | N/A         | N/A            | Peak     |
| 2  |      | 2480.145        | 74.17          | 29.75      | 103.92               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 27.12          | 29.76      | 56.88                | -17.12      | 74.00          | Peak     |
| 4  | *    | 2485.938        | 31.73          | 29.77      | 61.50                | -12.50      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2474MHz Core1 2480MHz |               |            |

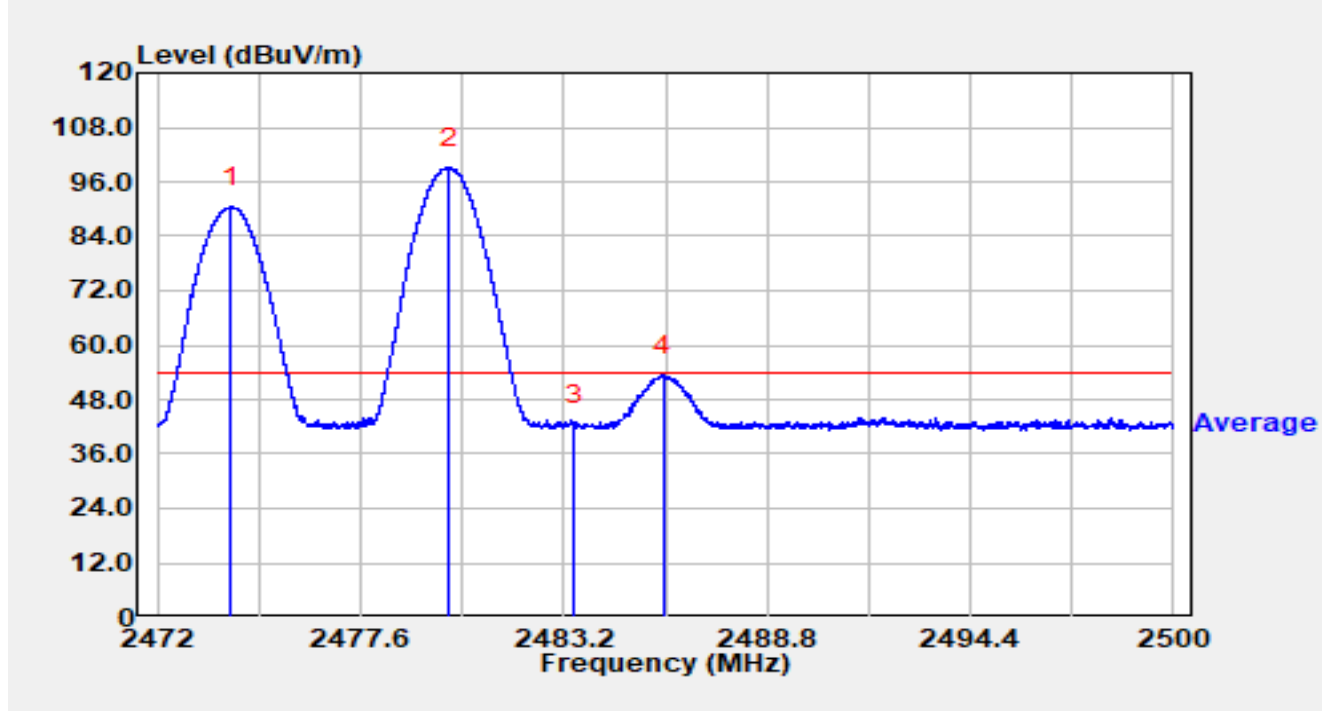


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2474.030        | 60.65          | 29.73      | 90.38                | N/A         | N/A            | Average  |
| 2  |      | 2480.036        | 69.42          | 29.75      | 99.17                | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.76          | 29.76      | 42.52                | -11.48      | 54.00          | Average  |
| 4  | *    | 2485.930        | 23.53          | 29.77      | 53.30                | -0.70       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2474MHz Core1 2480MHz |               |            |

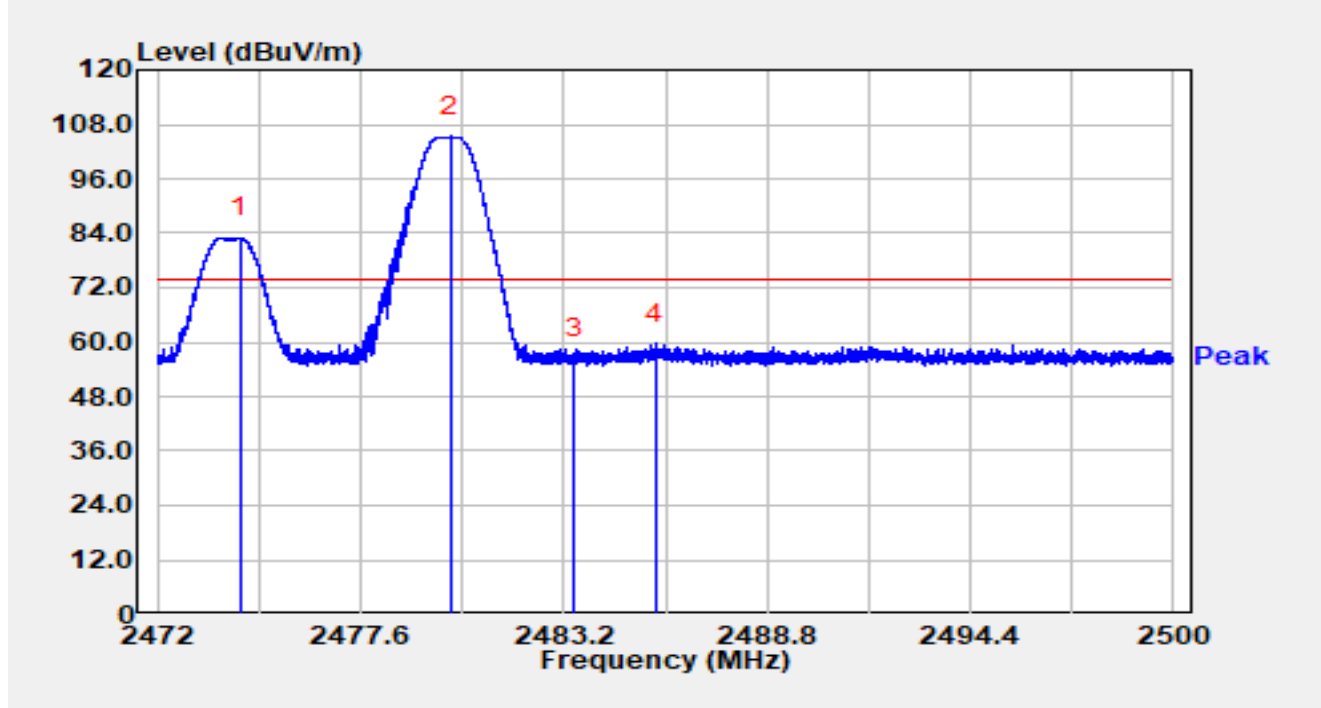


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2474.299        | 53.26          | 29.73      | 82.99                | N/A         | N/A            | Peak     |
| 2  |      | 2480.095        | 75.54          | 29.75      | 105.29               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 26.83          | 29.76      | 56.60                | -17.40      | 74.00          | Peak     |
| 4  | *    | 2485.731        | 29.96          | 29.77      | 59.73                | -14.27      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2474MHz Core1 2480MHz |               |            |

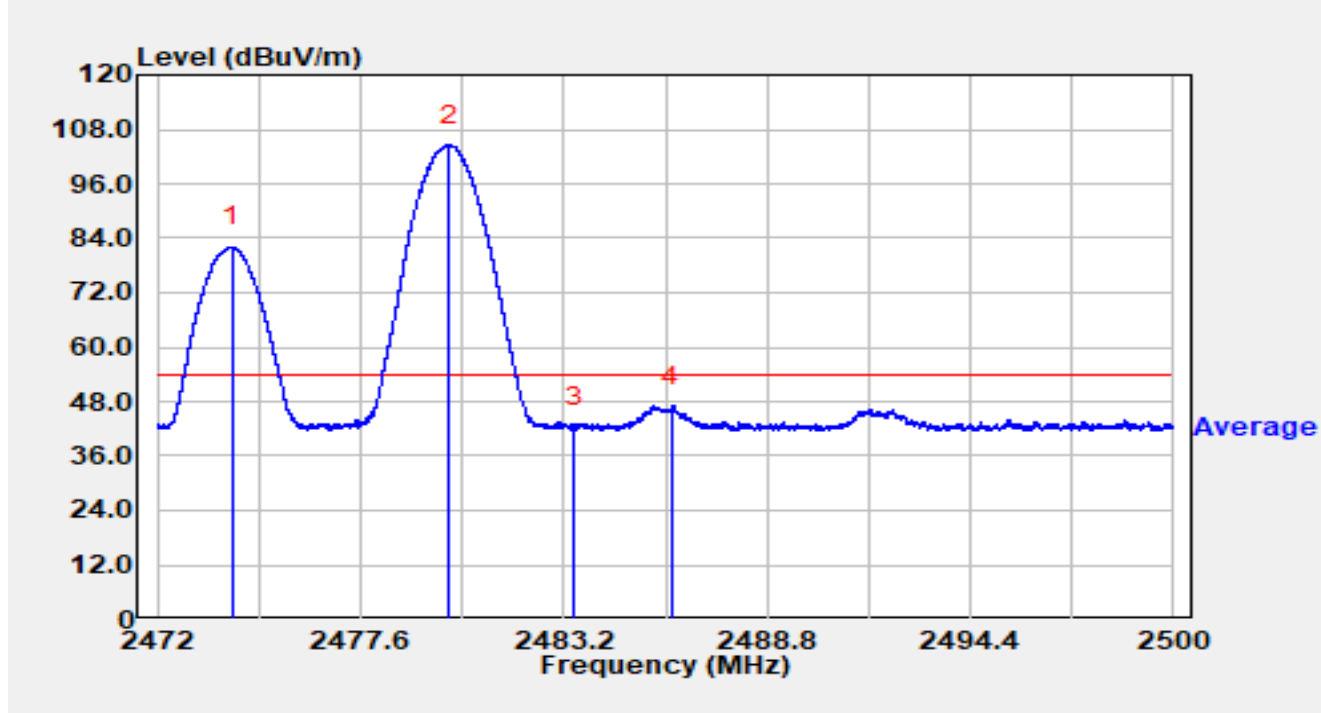


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2474.072        | 52.31          | 29.73      | 82.05                | N/A         | N/A            | Average  |
| 2  |      | 2480.047        | 74.72          | 29.75      | 104.47               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 12.69          | 29.76      | 42.46                | -11.54      | 54.00          | Average  |
| 4  | *    | 2486.179        | 17.30          | 29.77      | 47.08                | -6.92       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2476MHz Core1 2480MHz |               |            |

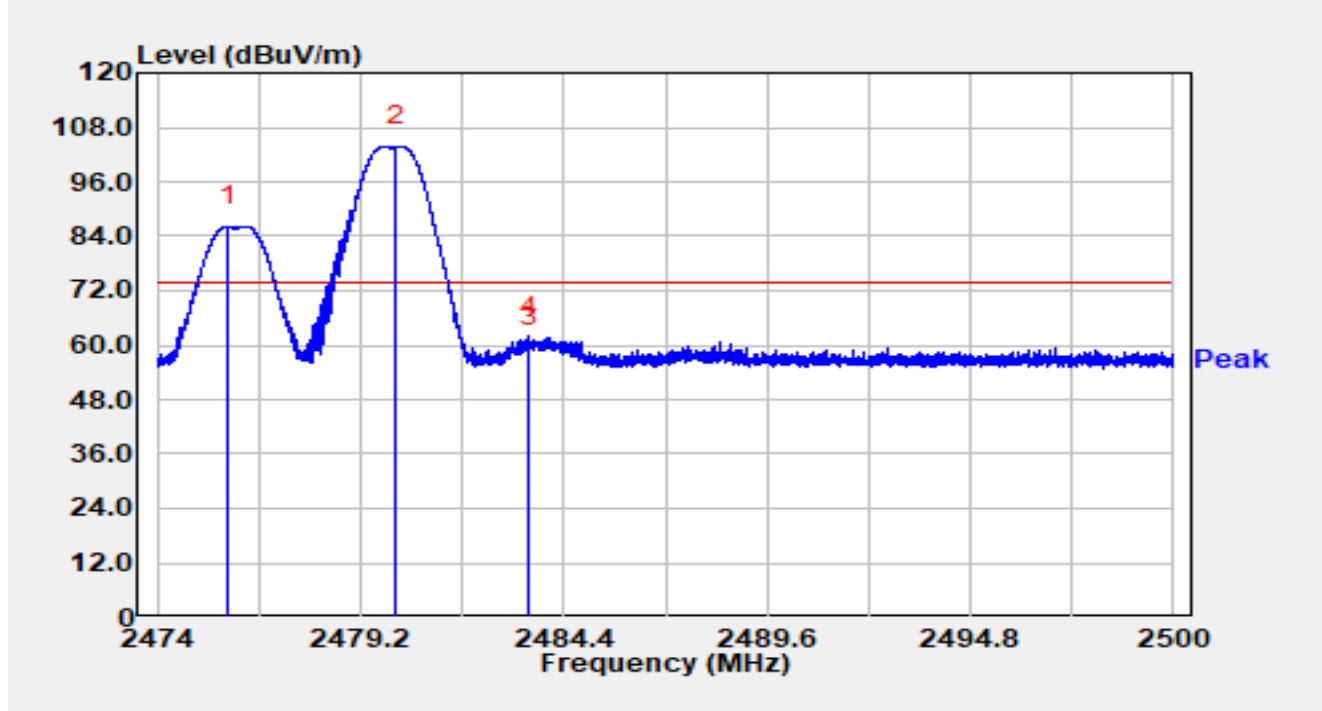


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2475.815        | 56.38          | 29.74      | 86.11                | N/A         | N/A            | Peak     |
| 2  |      | 2480.105        | 74.13          | 29.75      | 103.89               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 29.70          | 29.76      | 59.47                | -14.53      | 74.00          | Peak     |
| 4  | *    | 2483.513        | 32.14          | 29.76      | 61.90                | -12.10      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2476MHz Core1 2480MHz |               |            |

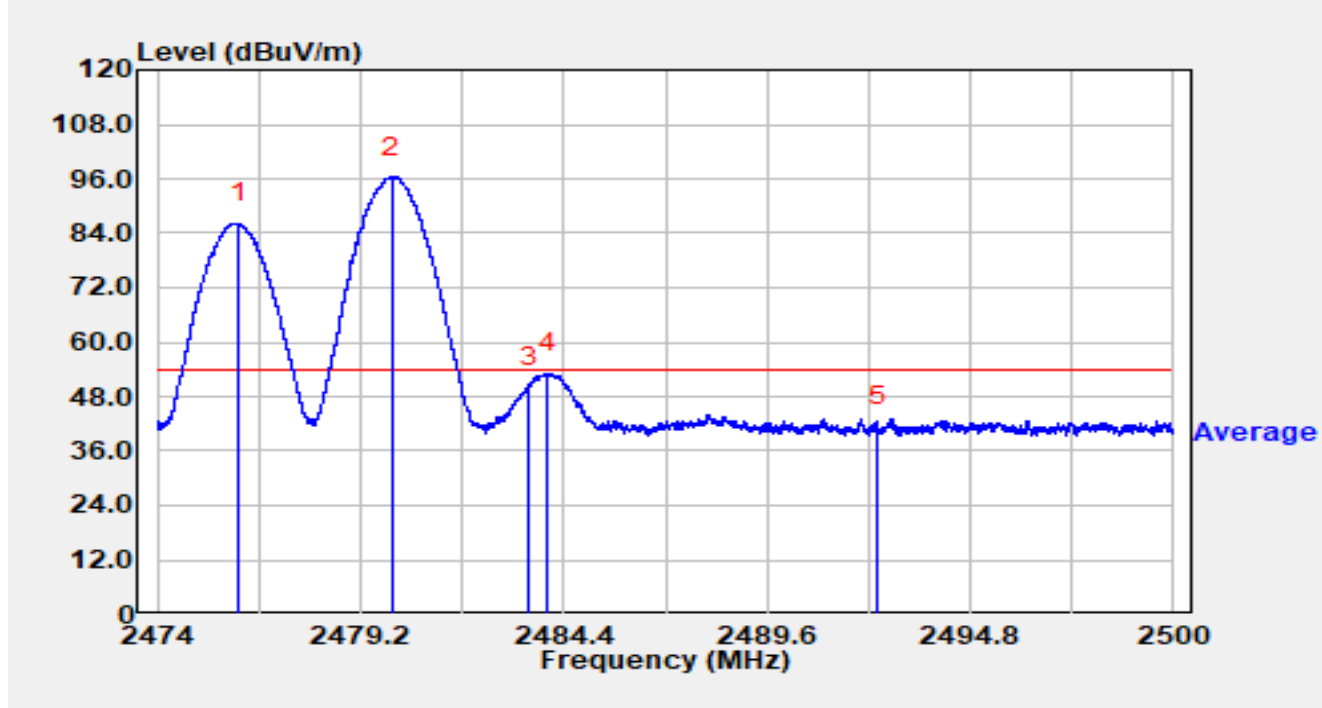


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2476.070        | 56.39          | 29.74      | 86.13                | N/A         | N/A            | Average  |
| 2  |      | 2480.016        | 66.65          | 29.75      | 96.40                | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 20.11          | 29.76      | 49.88                | -4.12       | 54.00          | Average  |
| 4  | *    | 2483.984        | 23.35          | 29.77      | 53.12                | -0.88       | 54.00          | Average  |
| 5  |      | 2492.421        | 11.61          | 29.79      | 41.40                | -12.60      | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2476MHz Core1 2480MHz |               |            |

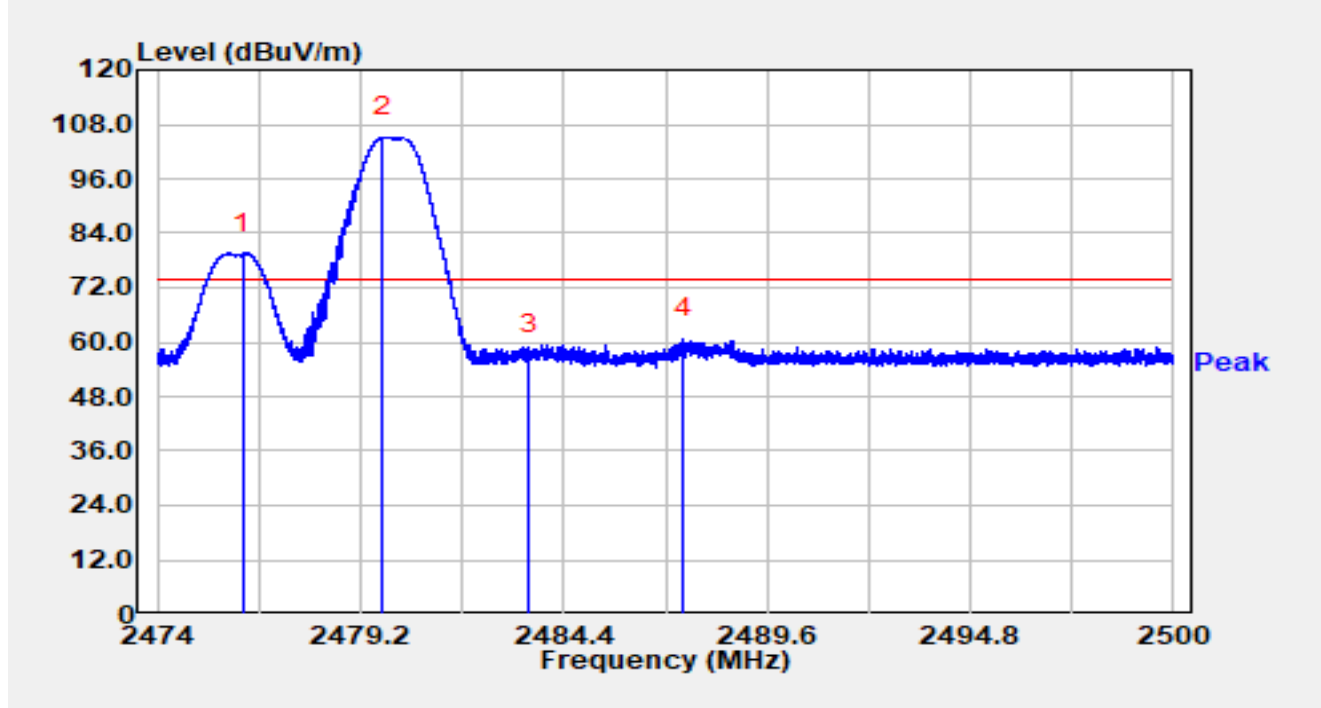


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2476.192        | 49.76          | 29.74      | 79.50                | N/A         | N/A            | Peak     |
| 2  |      | 2479.759        | 75.44          | 29.75      | 105.19               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 27.33          | 29.76      | 57.10                | -16.90      | 74.00          | Peak     |
| 4  | *    | 2487.450        | 30.98          | 29.78      | 60.76                | -13.24      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2476MHz Core1 2480MHz |               |            |

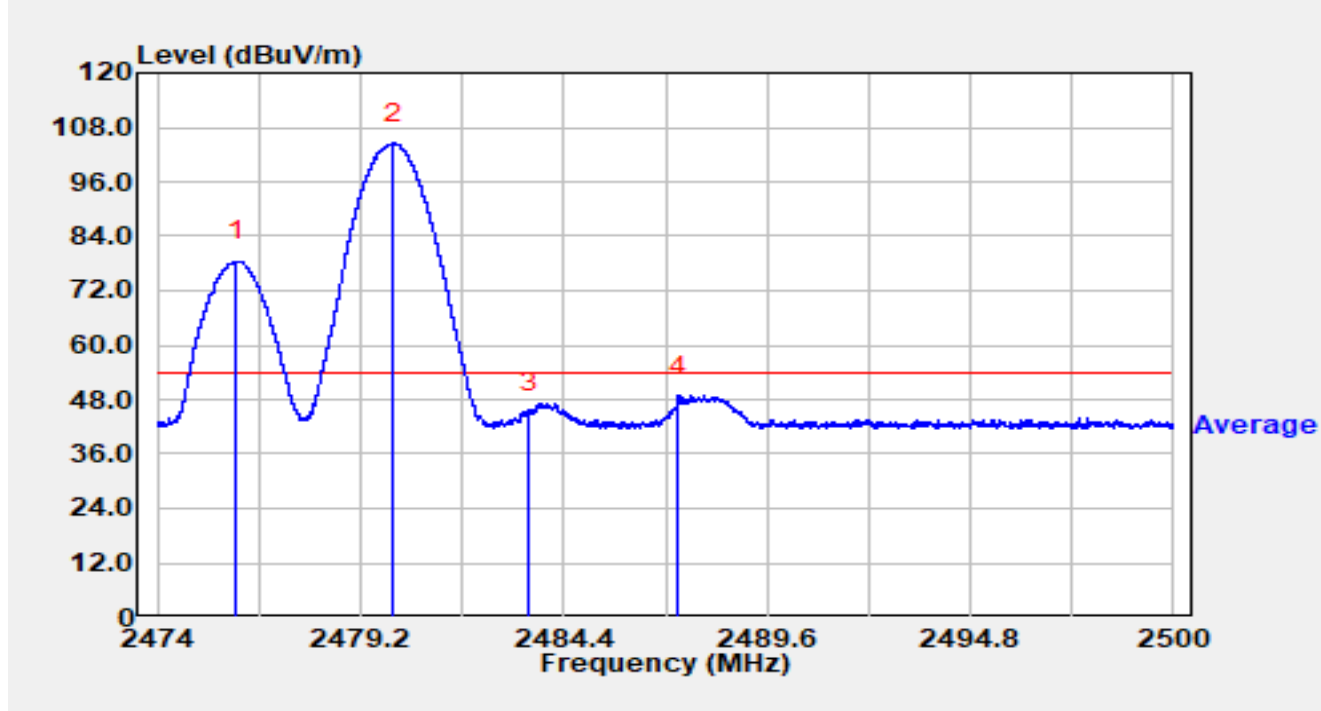


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2476.031        | 48.74          | 29.74      | 78.48                | N/A         | N/A            | Average  |
| 2  |      | 2480.048        | 74.67          | 29.75      | 104.42               | N/A         | N/A            | Average  |
| 3  |      | 2483.500        | 15.47          | 29.76      | 45.23                | -8.77       | 54.00          | Average  |
| 4  | *    | 2487.338        | 19.06          | 29.78      | 48.84                | -5.16       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2478MHz Core1 2480MHz |               |            |

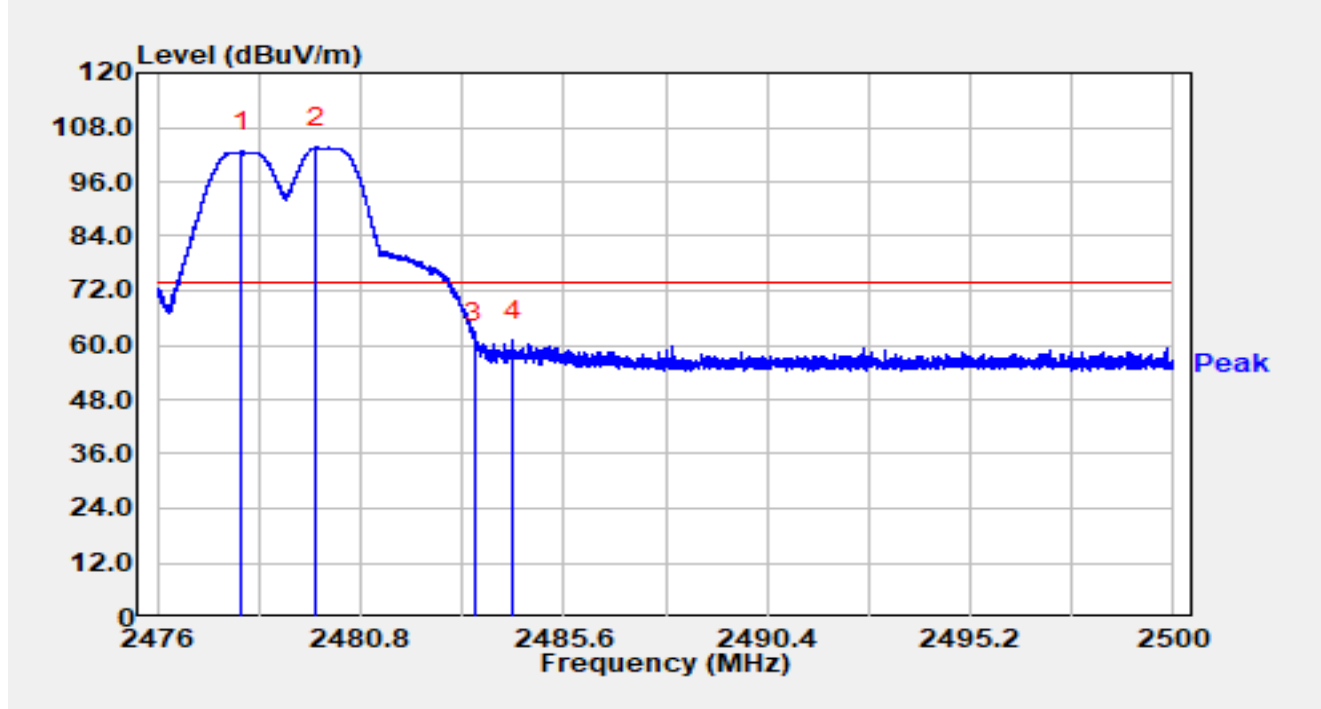


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2477.994        | 72.84          | 29.74      | 102.58               | N/A         | N/A            | Peak     |
| 2  |      | 2479.761        | 73.81          | 29.75      | 103.56               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 30.81          | 29.76      | 60.57                | -13.43      | 74.00          | Peak     |
| 4  | *    | 2484.395        | 31.33          | 29.77      | 61.09                | -12.91      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Horizontal |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2478MHz Core1 2480MHz |               |            |

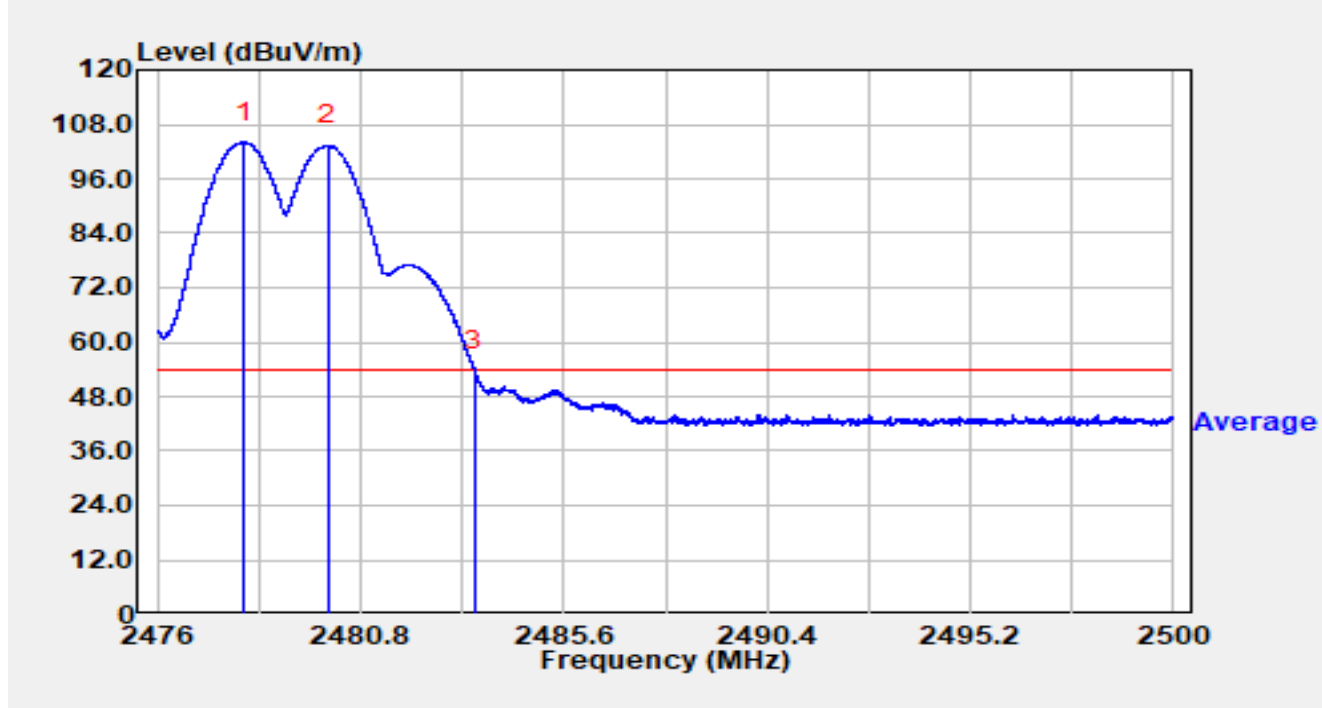


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2478.047        | 74.37          | 29.75      | 104.11               | N/A         | N/A            | Average  |
| 2  |      | 2480.039        | 73.62          | 29.75      | 103.37               | N/A         | N/A            | Average  |
| 3  | *    | 2483.500        | 23.74          | 29.76      | 53.50                | -0.50       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_PK                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2478MHz Core1 2480MHz |               |            |

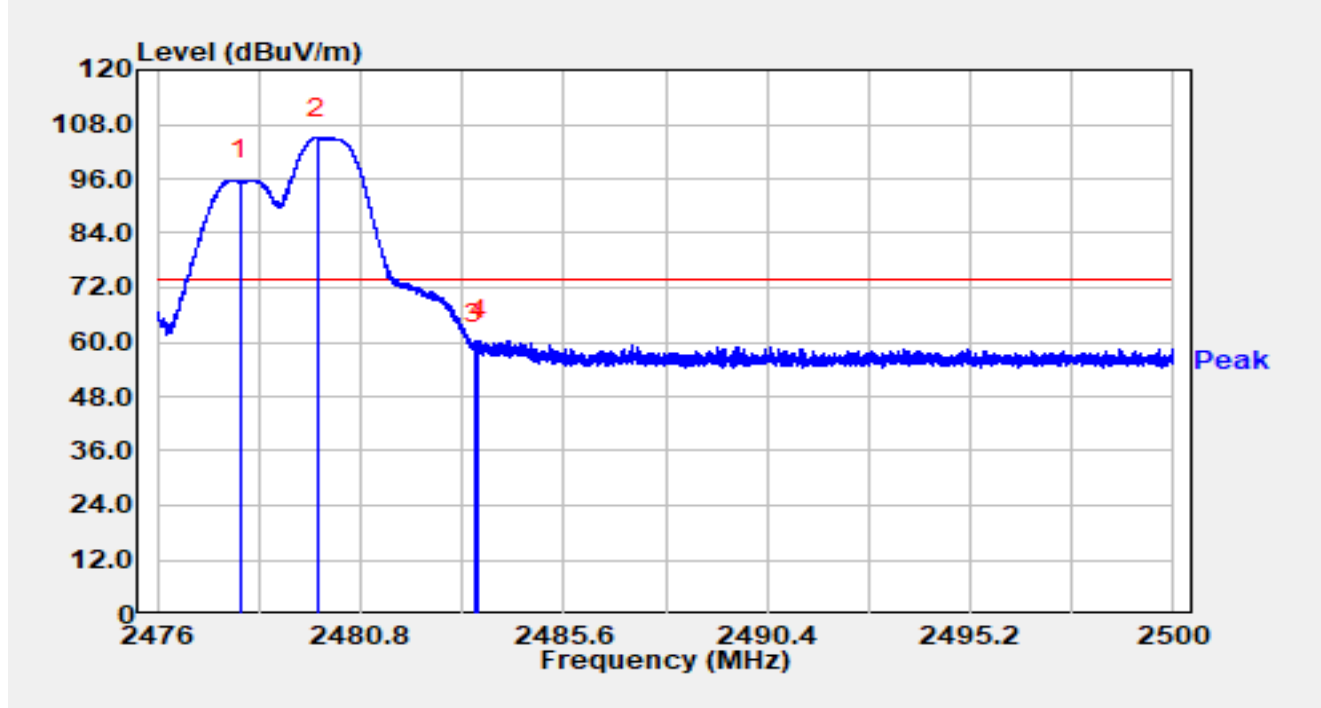


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2477.968        | 65.89          | 29.74      | 95.64                | N/A         | N/A            | Peak     |
| 2  |      | 2479.766        | 75.23          | 29.75      | 104.98               | N/A         | N/A            | Peak     |
| 3  |      | 2483.500        | 29.90          | 29.76      | 59.66                | -14.34      | 74.00          | Peak     |
| 4  | *    | 2483.596        | 30.58          | 29.76      | 60.34                | -13.66      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                      |               |            |
|-------------|------------------------------------------------------|---------------|------------|
| Site        | WJ-AC2                                               | Test Date     | 2025-02-11 |
| Temperature | 18.4 °C                                              | Humidity      | 33.4 %     |
| Limit       | FCC_Part 15_Band Edge(3m)_AV                         | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                                        | Polarity      | Vertical   |
| EUT         | ACCESS POINT                                         | Test Voltage  | By PoE     |
| Test Mode   | Transmit by BLE 1Mbps at Core0 2478MHz Core1 2480MHz |               |            |

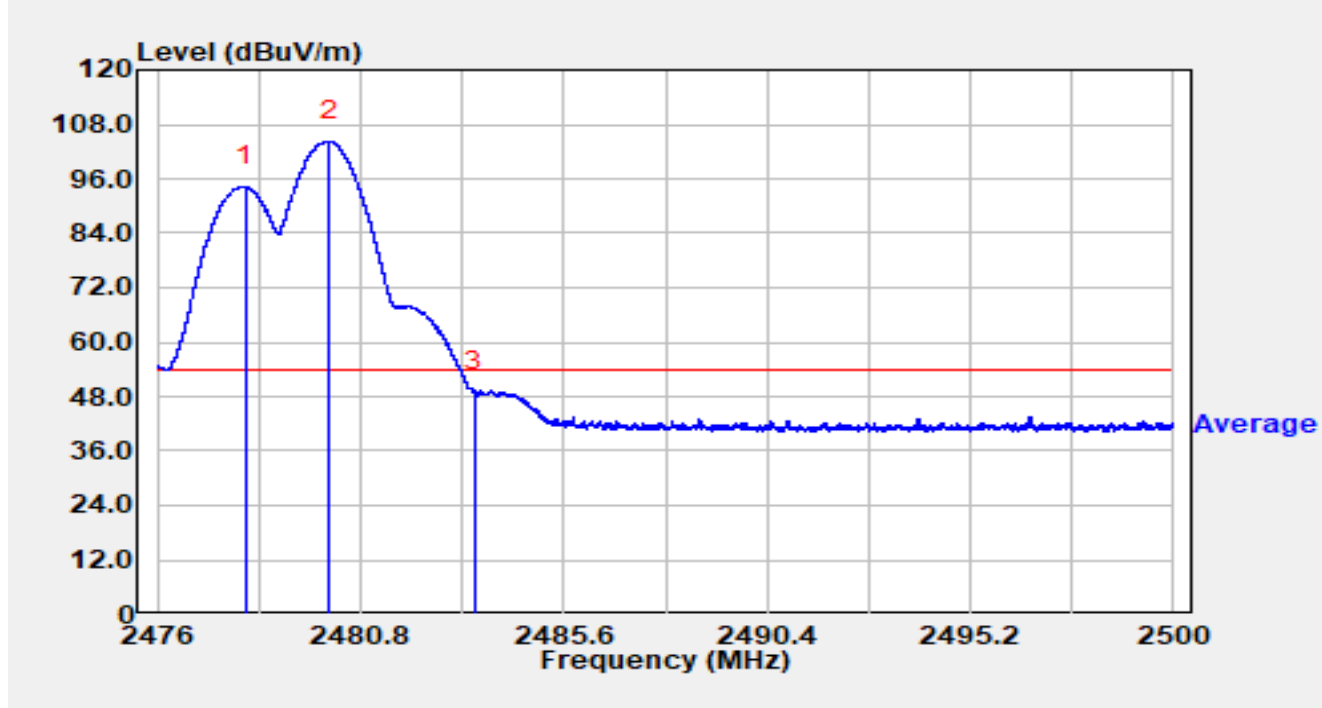


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2478.071        | 64.62          | 29.75      | 94.36                | N/A         | N/A            | Average  |
| 2  |      | 2480.068        | 74.47          | 29.75      | 104.22               | N/A         | N/A            | Average  |
| 3  | *    | 2483.500        | 19.53          | 29.76      | 49.29                | -4.71       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

### A.8 AC Conducted Emissions Test Result


|             |                                  |               |              |
|-------------|----------------------------------|---------------|--------------|
| Site        | WJ-SR5                           | Test Date     | 2025-02-18   |
| Temperature | 15.3 °C                          | Humidity      | 40.4 %       |
| Limit       | FCC Part 15.207_CE_QP            | Test Engineer | Carl Jiang   |
| Factor      | ENV216-07202_L1_Filter Off       | Polarity      | Line1        |
| EUT         | ACCESS POINT                     | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by BLE 1Mbps at 2402MHz |               |              |

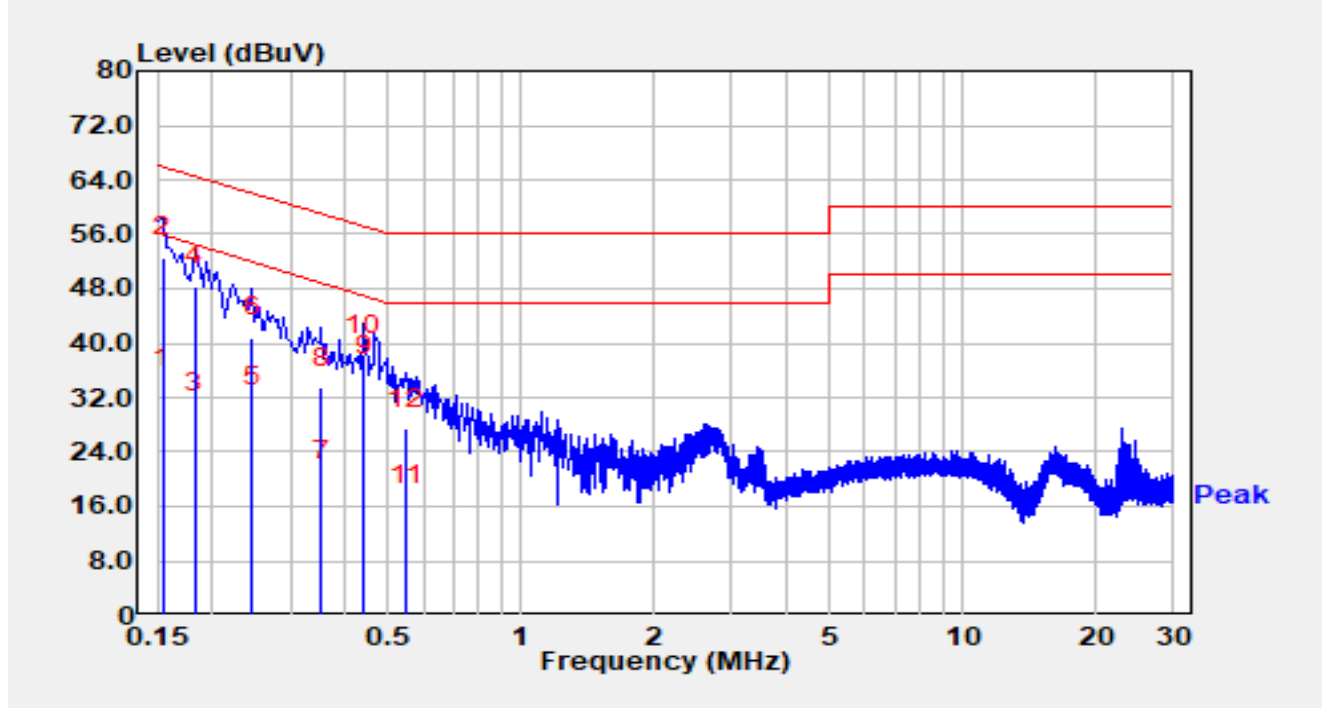

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB $\mu$ V) = Reading (dB $\mu$ V) + C.F (dB).

|             |                                  |               |              |
|-------------|----------------------------------|---------------|--------------|
| Site        | WJ-SR5                           | Test Date     | 2025-02-18   |
| Temperature | 15.3 °C                          | Humidity      | 40.4 %       |
| Limit       | FCC Part 15.207_CE_QP            | Test Engineer | Carl Jiang   |
| Factor      | ENV216-07202_N_Filter Off        | Polarity      | Neutral      |
| EUT         | ACCESS POINT                     | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by BLE 1Mbps at 2402MHz |               |              |

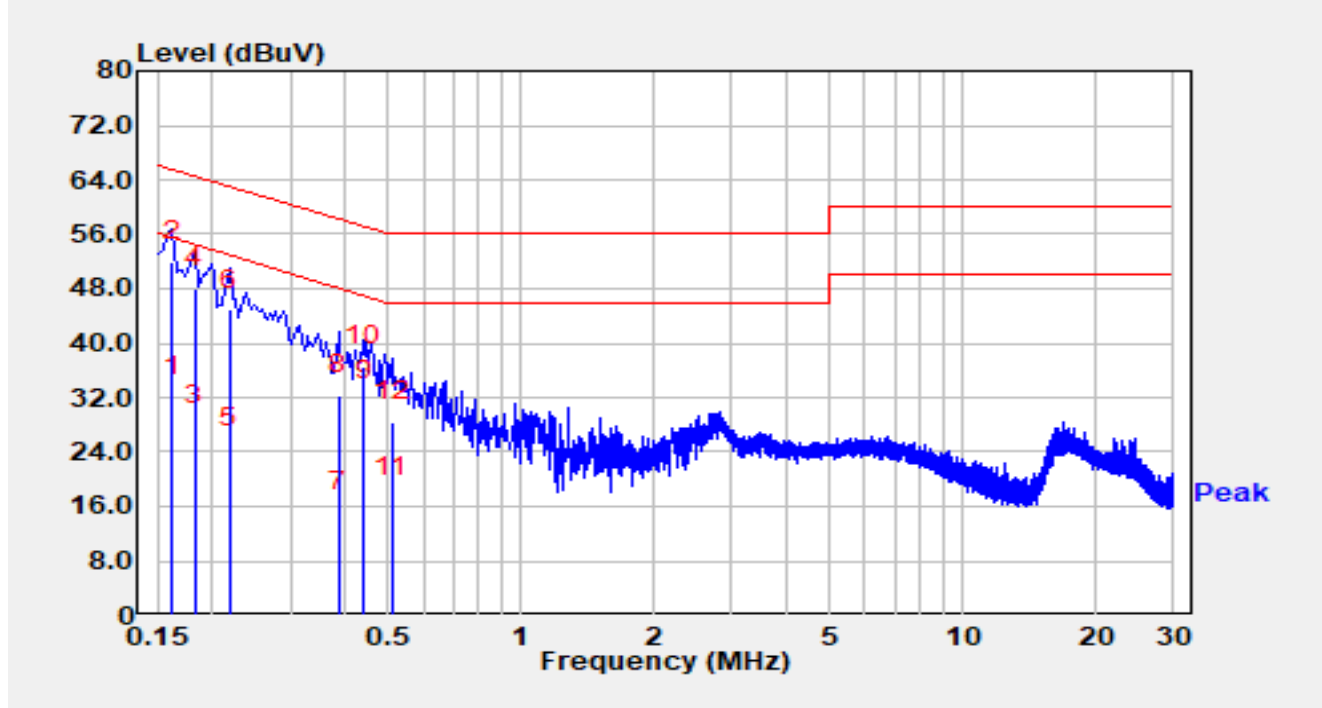

| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB) | Measurement (dBμV) | Margin (dB) | Limit (dBμV) | Detector |
|----|------|-----------------|----------------|----------|--------------------|-------------|--------------|----------|
| 1  |      | 0.162           | 22.60          | 9.67     | 32.27              | -23.09      | 55.36        | Average  |
| 2  | *    | 0.162           | 42.40          | 9.67     | 52.07              | -13.29      | 65.36        | QP       |
| 3  |      | 0.182           | 18.10          | 9.68     | 27.78              | -26.61      | 54.39        | Average  |
| 4  |      | 0.182           | 38.40          | 9.68     | 48.08              | -16.31      | 64.39        | QP       |
| 5  |      | 0.218           | 14.80          | 9.70     | 24.50              | -28.40      | 52.89        | Average  |
| 6  |      | 0.218           | 35.20          | 9.70     | 44.90              | -18.00      | 62.89        | QP       |
| 7  |      | 0.386           | 5.50           | 9.76     | 15.26              | -32.89      | 48.15        | Average  |
| 8  |      | 0.386           | 22.60          | 9.76     | 32.36              | -25.79      | 58.15        | QP       |
| 9  |      | 0.442           | 21.70          | 9.78     | 31.48              | -15.54      | 47.02        | Average  |
| 10 |      | 0.442           | 26.80          | 9.78     | 36.58              | -20.44      | 57.02        | QP       |
| 11 |      | 0.510           | 7.50           | 9.81     | 17.31              | -28.69      | 46.00        | Average  |
| 12 |      | 0.510           | 18.60          | 9.81     | 28.41              | -27.59      | 56.00        | QP       |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB $\mu$ V) = Reading (dB $\mu$ V) + C.F (dB).

## **Appendix B - Test Setup Photograph**

Refer to “2412RSU035-UT” file.

## Appendix C - EUT Photograph

Refer to “2412RSU035-UE” file.

---

The End

---