



RF MEASUREMENT REPORT

FCC ID: Q9DAPIN0734

Applicant: Hewlett Packard Enterprise Company

Product: ACCESS POINT

Model No.: APIN0734

Trademark: 
Hewlett Packard
Enterprise

FCC Classification: 15E 6GHz Standard Power Access Point (6SD)

FCC Rule Part(s): Part 15 Subpart E (Section 15.407)

Result: Complies

Received Date: 2023-11-09

Test Date: 2024-02-27 ~ 2024-04-29

Reviewed By:

Jame Yuan

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB789033. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2311RSU031-U18	V01	Initial Report	2025-03-25	Invalid
2311RSU031-U18	V02	Remove puncturing mode description and test data	2025-04-02	Valid

CONTENTS

Description	Page
1. General Information	6
1.1. Applicant	6
1.2. Manufacturer	6
1.3. Testing Facility	6
1.4. Product Information	7
1.5. Radio Specification under Test	7
1.6. Working Frequencies	8
1.7. Description of Antenna RF Port	10
1.8. Antenna Details	11
1.9. Description of Operating Paths Of Radio 2	12
2. Test Configuration	13
2.1. Test Mode	13
2.2. Test System Connection Diagram	14
2.3. Test Software	14
2.4. Applied Standards	15
2.5. Test Environment Condition	15
3. Antenna Requirements	16
4. Measuring Instrument	17
5. Decision Rules and Measurement Uncertainty	19
5.1. Decision Rules	19
5.2. Measurement Uncertainty	19
6. Test Result	20
6.1. Summary	20
6.2. 26dB & 99% Bandwidth Measurement	21
6.2.1. Test Limit	21
6.2.2. Test Procedure	21
6.2.3. Test Setting	21
6.2.4. Test Setup	22
6.2.5. Test Result	22
6.3. Output Power Measurement	23
6.3.1. Test Limit	23
6.3.2. Test Procedure	23
6.3.3. Test Setting	23
6.3.4. Test Setup	23
6.3.5. Test Result	23

6.4.	Power Spectral Density Measurement	24
6.4.1.	Test Limit	24
6.4.2.	Test Procedure	24
6.4.3.	Test Setting	24
6.4.4.	Test Setup.....	24
6.4.5.	Test Result.....	25
6.5.	In-Band Emission Measurement	26
6.5.1.	Test Limit	26
6.5.2.	Test Procedure	26
6.5.3.	Test Setting	26
6.5.4.	Test Setup.....	27
6.5.5.	Test Result.....	27
6.6.	Frequency Stability Measurement.....	28
6.6.1.	Test Limit	28
6.6.2.	Test Procedure	28
6.6.3.	Test Setup.....	28
6.6.4.	Test Result.....	29
6.7.	Radiated Spurious Emission Measurement	30
6.7.1.	Test Limit	30
6.7.2.	Test Procedure	30
6.7.3.	Test Setting	31
6.7.4.	Test Setup.....	33
6.7.5.	Test Result.....	34
6.8.	Radiated Restricted Band Edge Measurement.....	35
6.8.1.	Test Limit	35
6.8.2.	Test Procedure	35
6.8.3.	Test Setting	35
6.8.4.	Test Setup.....	36
6.8.5.	Test Result.....	36
6.9.	AC Conducted Emissions Measurement.....	37
6.9.1.	Test Limit	37
6.9.2.	Test Setup.....	37
6.9.3.	Test Result.....	37
Appendix A	- Test Result.....	38
A.1	Duty Cycle Test Result	38
A.2	26dB & 99% Bandwidth Test Result	40
A.3	Output Power Test Result	60
A.4	Power Spectral Density Test Result.....	63

A.5	In-Band Emission Measurement	100
A.6	Frequency Stability Test Result	149
A.7	Radiated Spurious Emission Test Result	150
A.8	Radiated Restricted Band Edge Test Result	365
A.9	AC Conducted Emissions Test Result	689
Appendix B - Test Setup Photograph		691
Appendix C - EUT Photograph		692

1.4. Product Information

Product Name	ACCESS POINT
Model No.	APIN0734
Serial No.	CNRLM5102L
Software Version	V1.6
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be
Bluetooth Specification	BLE only
ZigBee Specification	802.15.4
GNSS Specification	GPS
Antenna Information	Refer to Section 1.8
Power Type	AC Adapter Input or PoE Input
Operating Environment	Indoor Use
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification under Test

Frequency Range	For 802.11ax-HE20/be-EHT20: 5955 ~ 6415MHz, 6535 ~ 6855MHz For 802.11ax-HE40/be-EHT40: 5965 ~ 6405MHz, 6565 ~ 6845MHz For 802.11ax-HE80/be-EHT80: 5985 ~ 6385MHz, 6625 ~ 6785MHz For 802.11ax-HE160/be-EHT160: 6025 ~ 6345MHz, 6665MHz For 802.11be-EHT320: 6105MHz, 6265MHz		
Type of Modulation	802.11ax/be: OFDMA		
Data Rate	802.11ax: up to 2402Mbps 802.11be: up to 5764Mbps		
Support RU	☒ Full RU	☐ Partial RU	☐ Single RU
			☐ Multi RU
			☐ Channel Puncturing

1.6. Working Frequencies

802.11ax-HE20/be-EHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	5955 MHz	5	5975 MHz	9	5995 MHz
13	6015 MHz	17	6035 MHz	21	6055 MHz
25	6075 MHz	29	6095 MHz	33	6115 MHz
37	6135 MHz	41	6155 MHz	45	6175 MHz
49	6195 MHz	53	6215 MHz	57	6235 MHz
61	6255 MHz	65	6275 MHz	69	6295 MHz
73	6315 MHz	77	6335 MHz	81	6355 MHz
85	6375 MHz	89	6395 MHz	93	6415 MHz
117	6535 MHz	121	6555 MHz	125	6575 MHz
129	6595 MHz	133	6615 MHz	137	6635 MHz
141	6655 MHz	145	6675 MHz	149	6695 MHz
153	6715 MHz	157	6735 MHz	161	6755 MHz
165	6775 MHz	169	6795 MHz	173	6815 MHz
177	6835 MHz	181	6855 MHz	--	--

802.11ax-HE40/be-EHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
3	5965 MHz	11	6005 MHz	19	6045 MHz
27	6085 MHz	35	6125 MHz	43	6165 MHz
51	6205 MHz	59	6245 MHz	67	6285 MHz
75	6325 MHz	83	6365 MHz	91	6405 MHz
123	6565 MHz	131	6605 MHz	139	6645 MHz
147	6685 MHz	155	6725 MHz	163	6765 MHz
171	6805 MHz	179	6845 MHz	--	--

802.11ax-HE80/be-EHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
7	5985 MHz	23	6065 MHz	39	6145 MHz
55	6225 MHz	71	6305 MHz	87	6385 MHz
135	6625 MHz	151	6705 MHz	167	6785 MHz


802.11ax-HE160/be-EHT160

Channel	Frequency	Channel	Frequency	Channel	Frequency
15	6025 MHz	47	6185 MHz	79	6345 MHz
143	6665 MHz	--	--	--	--

802.11be-EHT320

Channel	Frequency	Channel	Frequency	Channel	Frequency
31	6105 MHz	63	6265 MHz	--	--

1.7. Description of Antenna RF Port

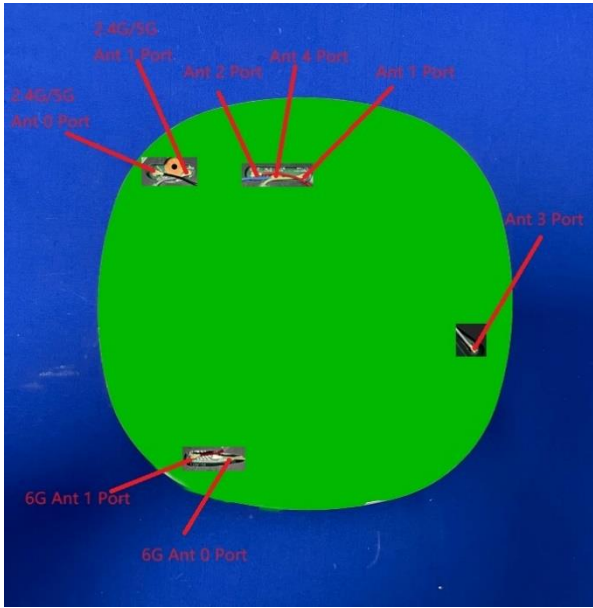				
Antenna Port	RF Spec.			
	Wi-Fi 2.4G	Wi-Fi 5G	Wi-Fi 6G	BLE/ZigBee
6G Ant 0	--	--	● (Radio 2)	--
6G Ant 1	--	--	● (Radio 2)	--
2.4G/5G Ant 0	● (Radio 0)	● (Radio 1)	--	--
2.4G/5G Ant 1	● (Radio 0)	● (Radio 1)	--	--
Ant 4	--	--	--	● (Core 1)
Ant 2	--	--	--	● (Core 0)
Ant 1	--	--	--	● (Core 1)
Ant 3	GNSS			

1.8. Antenna Details

Polarization	Antenna Name	Frequency	Max Peak	CDD Dir Gain (dBi)		BF Dir Gain (dBi)
		Band (GHz)	Gain (dBi)	For Power	For PSD	
Wi-Fi External Antenna List (2*2 MIMO)						
Omni	AP-ANT-311	2.4 ~ 2.5	3.0	3.0	6.01	6.01
		5.15 ~ 5.9	6.0	6.0	9.01	9.01
		5.9 ~ 7.2	6.0	6.0	9.01	9.01
Omni	AP-ANT-312	2.4 ~ 2.5	3.3	3.3	6.31	6.31
		5.15 ~ 5.9	3.3	3.3	6.31	6.31
		5.9 ~ 7.2	4.1	4.1	7.11	7.11
Omni	AP-ANT-313	2.4 ~ 2.5	3.0	3.0	6.01	6.01
		5.15 ~ 5.9	6.0	6.0	9.01	9.01
		5.9 ~ 7.2	6.0	6.0	9.01	9.01
Omni	AP-ANT-320 AP-ANT-340	2.4 ~ 2.5	4.0	4.0	7.01	7.01
		5.15 ~ 5.9	5.0	5.0	8.01	8.01
		5.9 ~ 7.2	5.0	5.0	8.01	8.01
Directional (Note 4, 5)	AP-ANT-325 AP-ANT-345	2.4 ~ 2.5	6.1	6.1	6.1	6.1
		5.15 ~ 5.9	6.1	6.1	6.1	6.1
		5.9 ~ 7.2	5.4	5.4	5.4	5.4
Directional (Note 4, 5)	AP-ANT-328 AP-ANT-348	2.4 ~ 2.5	7.5	7.5	7.5	7.5
		5.15 ~ 5.9	8.0	8.0	8.0	8.0
		5.9 ~ 7.2	8.0	8.0	8.0	8.0

Note:

1, The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

If all antennas have the same gain, G_{ANT} , Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices, Array Gain = $10 \log (N_{ANT}/N_{SS})$ dB = 3.01;
- For power measurements on IEEE 802.11 devices, Array Gain = 0 dB for $N_{ANT} \leq 4$;

2, The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac/ax/be, not include 802.11a/b/g.

3, The antenna specification is provided by the applicant.

4, These antennas are cross polarized design and the detail refers to antenna specification.

5, AP-ANT-325 is a tri-band and 2-element antenna and AP-ANT-345 is a tri-band and 4-element antenna.

AP-ANT-328 is a tri-band and 2-element antenna and AP-ANT-348 is a tri-band and 4-element antenna.

6. Low gain antenna (AP-ANT-312) was selected to perform all RF testing that can get maximum power setting, high gain different type antenna (AP-ANT-340 & AP-ANT-348) was selected to perform radiated spurious emission and band edge testing. High gain antenna power setting will be reduced according to difference value of antenna gain declared by applicant.

1.9. Description of Operating Paths Of Radio 2

Filter	Specification
Filter 1#	Band Pass Filter (6115-7095MHz)
Filter 2#	Band Pass Filter (5955-6415MHz)


2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by 802.11ax-HE20_Nss=1 (MCS0)
Mode 2: Transmit by 802.11ax-HE40_Nss=1 (MCS0)
Mode 3: Transmit by 802.11ax-HE80_Nss=1 (MCS0)
Mode 4: Transmit by 802.11ax-HE160_Nss=1 (MCS0)
Mode 5: Transmit by 802.11be-EHT20_Nss=1 (MCS0)
Mode 6: Transmit by 802.11be-EHT40_Nss=1 (MCS0)
Mode 7: Transmit by 802.11be-EHT80_Nss=1 (MCS0)
Mode 8: Transmit by 802.11be-EHT160_Nss=1 (MCS0)
Mode 9: Transmit by 802.11be-EHT320_Nss=1 (MCS0)
Note: 1. For Radiated emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. 2. For CDD mode, this device supports 2 Nss and power level is the same of spatial multiplexing. The worst case is Nss=1. 3. For beamforming operation, the manufacturer automatically backs power down based on CDD power. Therefore, only the CDD mode was evaluated in this report.

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

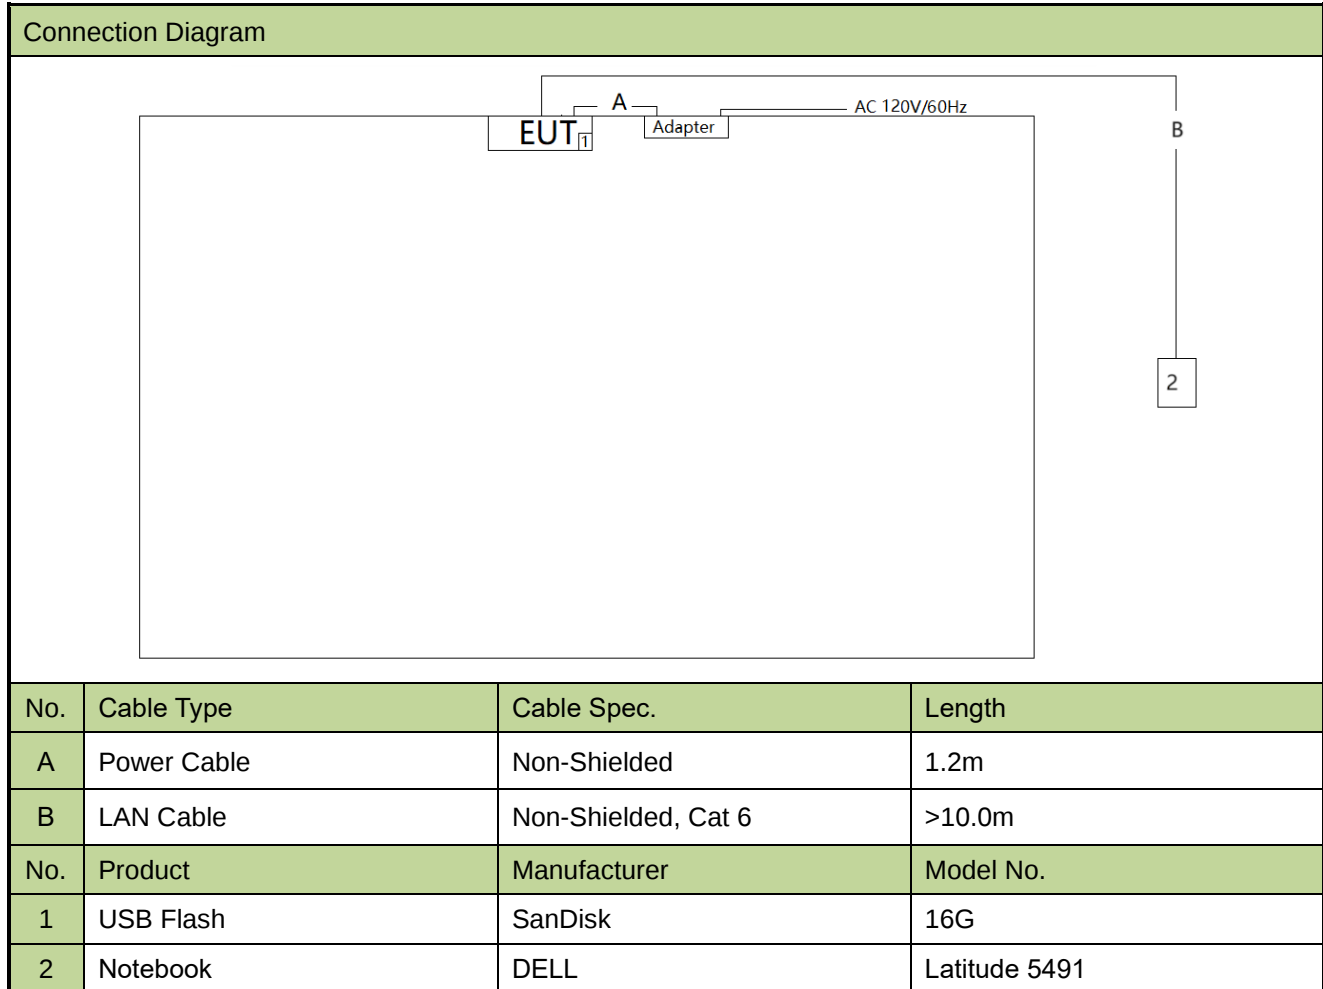

2.3. Test Software

The test utility software used during testing was “accessMTool”, and the version was 3.3.0.6.

Note: Final power setting please refer to operational description.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.10-2013
- FCC KDB 789033 D02v02r01
- FCC KDB 987594 D02v02r01
- FCC KDB 987594 D04v02
- FCC KDB 662911 D01v02r01

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

Conclusion:

The product is defined as the professional installation of equipment by the manufacturer, there is no necessary to comply with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
USB Power Sensor	Keysight	U2021XA	MRTSUE06446	1 year	2024-05-23	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2024-05-23	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11082	1 year	2024-06-08	WZ-SR5
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2024-05-31	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2024-04-20	WZ-AC1
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2024-12-17	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2024-08-09	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2024-10-11	WZ-AC1
Preamplifier	Agilent	83017A	MRTSUE06076	1 year	2024-05-07	WZ-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2024-10-23	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11039	1 year	2024-10-25	WZ-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2024-06-09	WZ-AC1
Active Loop Antenna	Schwarzbeck	FMZB 1519-60 D	MRTSUE07076	1 year	2024-12-04	WZ-AC1/WZ-AC2
Horn Antenna	ETS	3117	MRTSUE06257	1 year	2024-09-23	WZ-AC1/WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2024-11-04	WZ-AC1/WZ-AC2
Passive Magnetic TX Loop Antenna	Schwarzbeck	Cable loop EN 303417	MRTSUE07087	N/A	N/A	WZ-AC1/WZ-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2025-01-11	WZ-AC1/WZ-AC2
Preamplifier	EMCI	EMC051845SE	MRTSUE06987	1 year	2024-09-07	WZ-AC1/WZ-AC2
Test loop antenna	MRT	d-2m	MRTSUE11131	N/A	N/A	WZ-AC1/WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2024-04-20	WZ-AC2
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2024-05-23	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2024-10-11	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2024-05-07	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11263	1 year	2024-11-07	WZ-AC2
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2024-05-15	WZ-AC2
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2024-09-27	WZ-TR3
Thermohygrometer	testo	608-H1	MRTSUE11268	1 year	2024-12-14	WZ-TR3
Vibration Test System	DongLing	ES-1-150	MRTSUE06206	1 year	2024-07-02	WZ-TR3
Signal Analyzer	Keysight	N9010B	MRTSUE07027	1 year	2024-10-23	WZ-TR3/WZ-SR5
Signal Analyzer	Keysight	N9020B	MRTSUE07037	1 year	2025-02-03	WZ-TR3/WZ-SR5
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2024-05-23	WZ-SR2
Shielding Room	MIX-BEP	WZ-SR2	MRTSUE06215	5 years	2026-12-20	WZ-SR2

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2024-05-31	WZ-SR2
Four-Line V-Network	R&S	ENV432	MRTSUE06615	1 year	2024-09-27	WZ-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2024-09-27	WZ-SR2

Software	Version	Function
EMI V3	V 3.0.0	EMI Test Software
Controller_MF 7802	2.03C	RE Antenna & Turntable
Controller_MF 7802	1.02	RE Antenna & Turntable
BenchVue Power Meter	2018.1	Power

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
9kHz~150kHz: 3.58dB	
150kHz~30MHz: 3.20dB	
Radiated Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
Coaxial:	9kHz~30MHz: 2.61dB
Coplanar:	9kHz~30MHz: 2.62dB
Horizontal:	30MHz~200MHz: 3.79dB
	200MHz~1GHz: 3.91dB
	1GHz~40GHz: 4.99dB
Vertical:	30MHz~200MHz: 4.06dB
	200MHz~1GHz: 5.21dB
	1GHz~40GHz: 4.90dB
Spurious Emissions, Conducted	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$):	
2.2dB	
Output Power	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$):	
1.4dB	
Power Spectrum Density	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$):	
2.2dB	
Occupied Bandwidth	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$):	
2.7%	

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.407(a)(11)	26dB & 99% Bandwidth	Conducted	Pass
15.407(a)(4)	Maximum Equivalent Isotopically Radiated Power (EIRP)		Pass
15.407(a)(4)	Maximum Power Spectral Density (EIRP)		Pass
15.407(b)(7)	In-Band Emission		Pass
15.407(d)(6)	Automated Frequency Coordination		Pass ^{Note 3}
15.407(b)(6)	Unwanted Emissions	Radiated	Pass
15.407(b)(8), (9), (10)	General Field Strength (Restricted Bands and Radiated Emission)		Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Notes:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
- Automated Frequency Coordination refers to report "2311RSU031-U19".

6.2. 26dB & 99% Bandwidth Measurement

6.2.1. Test Limit

The maximum transmitter channel bandwidth for U–NII devices in the 5.925–7.125 GHz band is 320 megahertz.

6.2.2. Test Procedure

KDB 789033 D02v02r01- Section II)C)1) (26dB Bandwidth)

KDB 789033 D02v02r01- Section II)D) (99% Bandwidth)

6.2.3. Test Setting

26dB Bandwidth


1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth
2. RBW = approximately 1% of the emission bandwidth.
3. VBW > RBW
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 1% to 5% of the OBW
3. $VBW \geq 3 \times RBW$
4. Span = 1.5 times to 5 times the OBW
5. Detector = peak
6. Trace mode = max hold
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument.

6.2.4. Test Setup

Spectrum Analyzer



DC Block
&
Attenuator



EUT



6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

For a standard power access point and fixed client device operating in the 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 36 dBm.

6.3.2. Test Procedure


KDB 789033D02v02r01- Section II(E)3)b) Method PM-G

6.3.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup

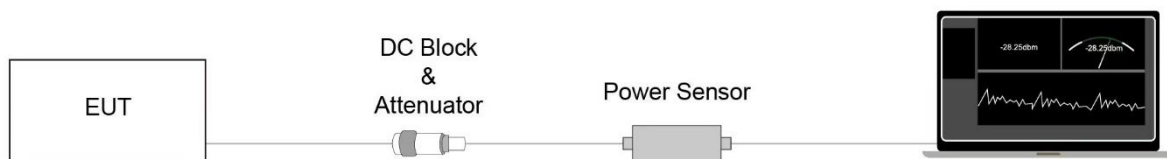

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

For a standard power access point and fixed client device operating in the 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed 23 dBm e.i.r.p in any 1-megahertz band.


6.4.2. Test Procedure

KDB 789033 D02v02r01-Section II)F)

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
10. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
11. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

6.4.4. Test Setup

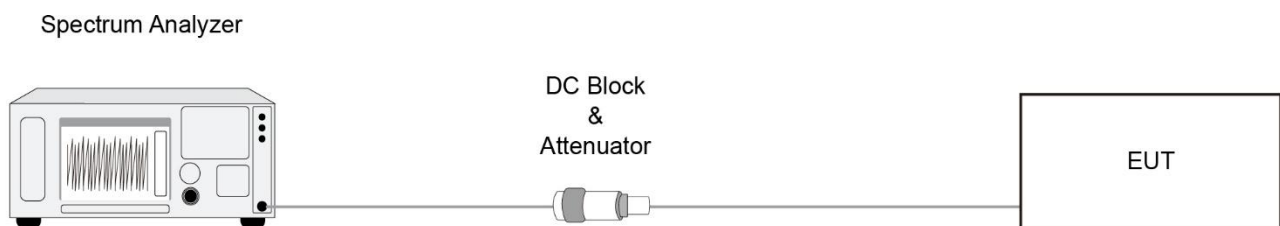

6.4.5. Test Result

Refer to Appendix A.4.

6.5. In-Band Emission Measurement

6.5.1. Test Limit

Suppressed by 20 dB at 1 MHz outside of the channel edge.

(The channel edge is defined as the 26 dB point on either side of the carrier center frequency.)

Suppressed by 28 dB at one channel bandwidth from the channel center.

Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.

6.5.2. Test Procedure

KDB 987594 D02v02r01- Section II)J)

6.5.3. Test Setting

Emissions Mask Reference Level Measurement


1. Set the span to encompass the entire 26 dB EBW of the signal.
2. Set RBW = same RBW used for 26 dB EBW measurement.
3. Set VBW $\geq 3 \times$ RBW.
4. Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
5. Sweep time = auto.
6. Detector = RMS.
7. Trace average at least 100 traces in power averaging (rms) mode.
8. Use the peak search function on the instrument to find the peak of the spectrum.

In-Band Emission

1. Using the measuring equipment limit line function, develop the emissions mask based on rule.
2. Adjust the span to encompass the entire mask as necessary.
3. Clear trace.
4. Trace average at least 100 traces in power averaging (rms) mode.
5. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

6.5.4. Test Setup

Spectrum Analyzer



DC Block
&
Attenuator



EUT



6.5.5. Test Result

Refer to Appendix A.5.

6.6. Frequency Stability Measurement

6.6.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.6.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

6.6.3. Test Setup

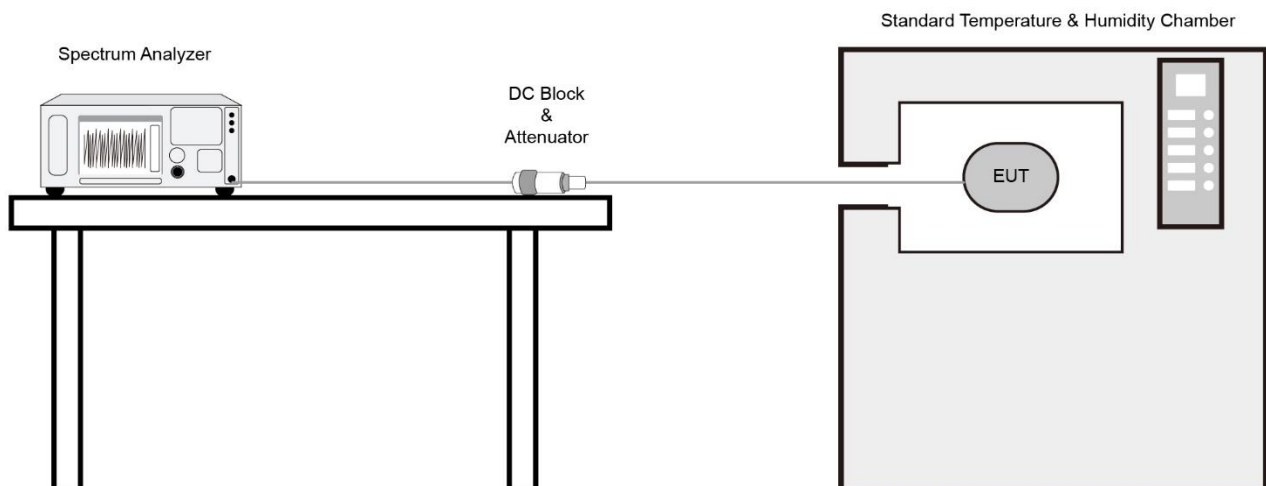

6.6.4. Test Result

Refer to Appendix A.6.

6.7. Radiated Spurious Emission Measurement

6.7.1. Test Limit

For 15.407(b)(5) requirement

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an EIRP. of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6GHz EMC Measurement v02r01 clause G

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.7.2. Test Procedure

KDB 789033 D02v02r01-Section II)G)

6.7.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.


If the EUT duty cycle is $< 98\%$, set $\text{VBW} \geq 1/T$. T is the minimum transmission duration.

802.11ax-HE20	VBW = 680Hz	802.11be-EHT40	VBW = 1300Hz
802.11ax-HE40	VBW = 1300Hz	802.11be-EHT80	VBW = 2700Hz
802.11ax-HE80	VBW = 2700Hz	802.11be-EHT160	VBW = 4300Hz
802.11ax-HE160	VBW = 4300Hz	802.11be-EHT320	VBW = 6800Hz
802.11be-EHT20	VBW = 680Hz	802.11be-EHT320	VBW = 6800Hz


4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.7.4. Test Setup


Below 30MHz Test Setup:

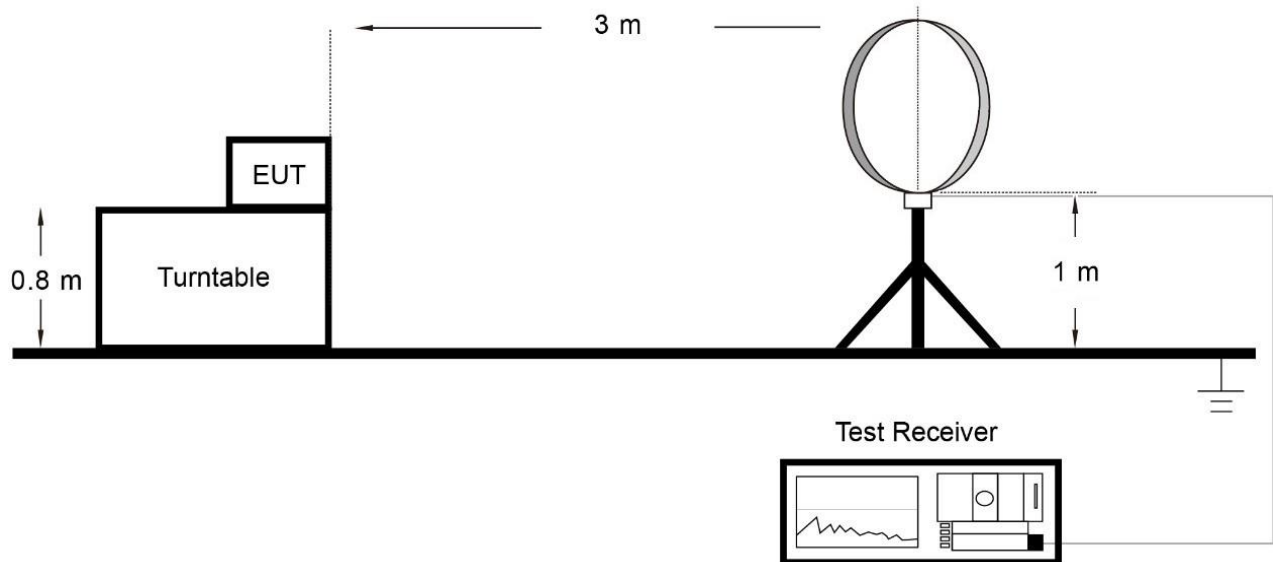

Below 1GHz Test Setup:

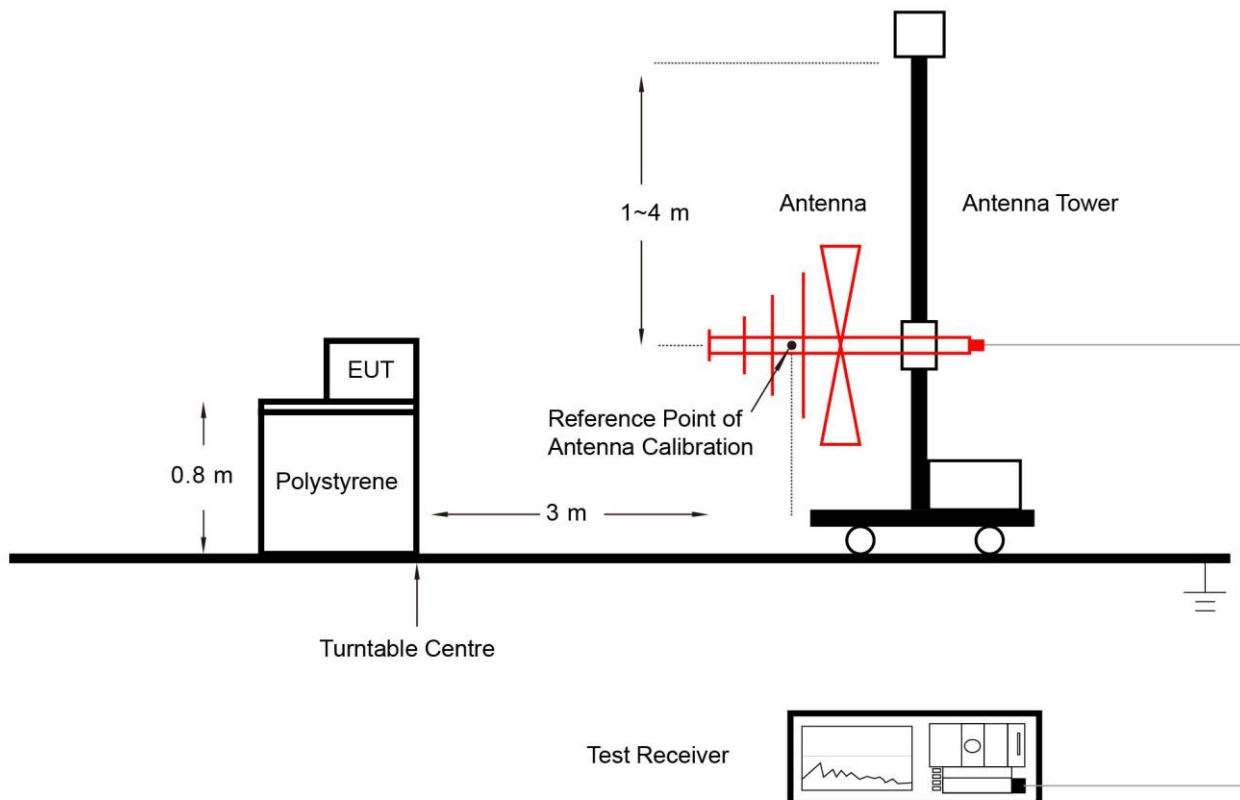

Above 1GHz Test Setup:

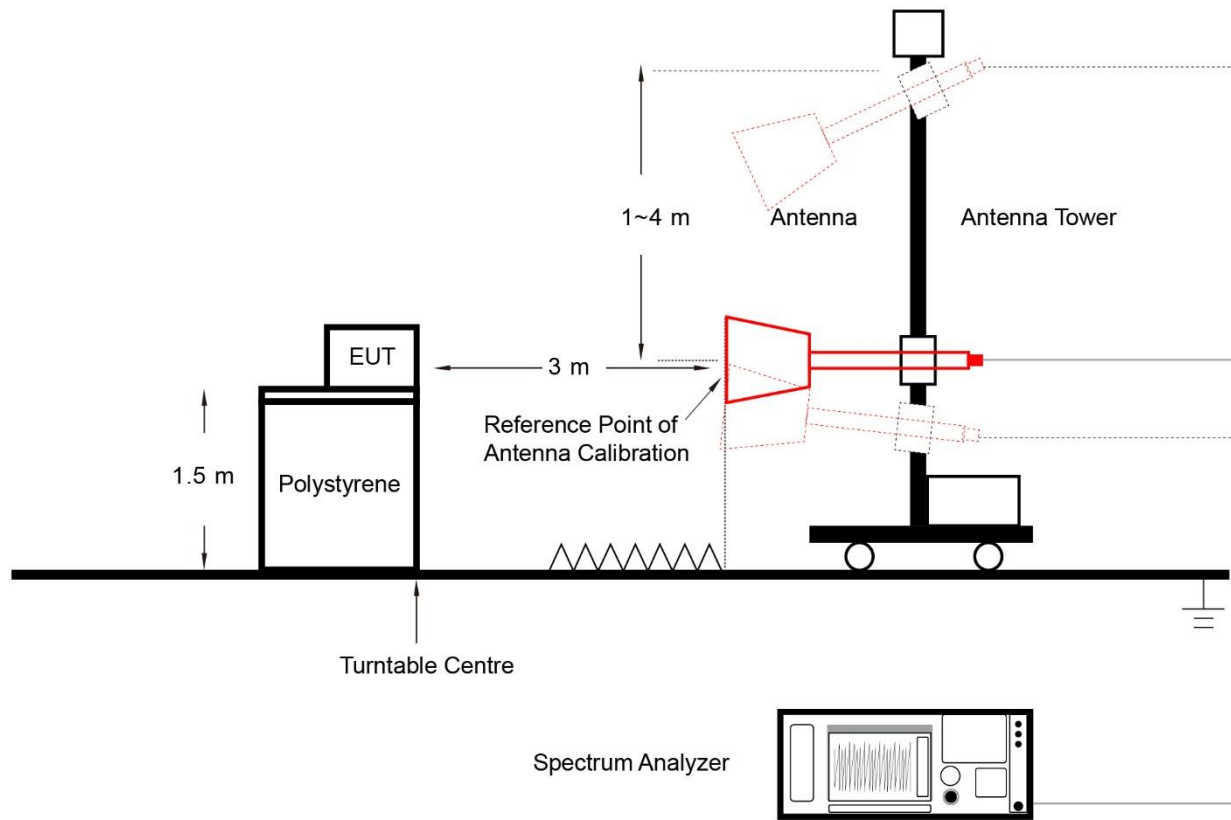

6.7.5. Test Result

Refer to Appendix A.8.

6.8. Radiated Restricted Band Edge Measurement

6.8.1. Test Limit

For 15.407(b)(5) requirement:

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an EIRP. of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6GHz EMC Measurement v02r01 clause G - Unwanted Emission Measurement
Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

6.8.2. Test Procedure

KDB 789033 D02v02r01-Section II)G)

6.8.3. Test Setting

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.


If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.

802.11ax-HE20	VBW = 680Hz	802.11be-EHT40	VBW = 1300Hz
802.11ax-HE40	VBW = 1300Hz	802.11be-EHT80	VBW = 2700Hz
802.11ax-HE80	VBW = 2700Hz	802.11be-EHT160	VBW = 4300Hz

802.11ax-HE160	VBW = 4300Hz	802.11be-EHT320	VBW = 6800Hz
802.11be-EHT20	VBW = 680Hz	802.11be-EHT320	VBW = 6800Hz

4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.8.4. Test Setup

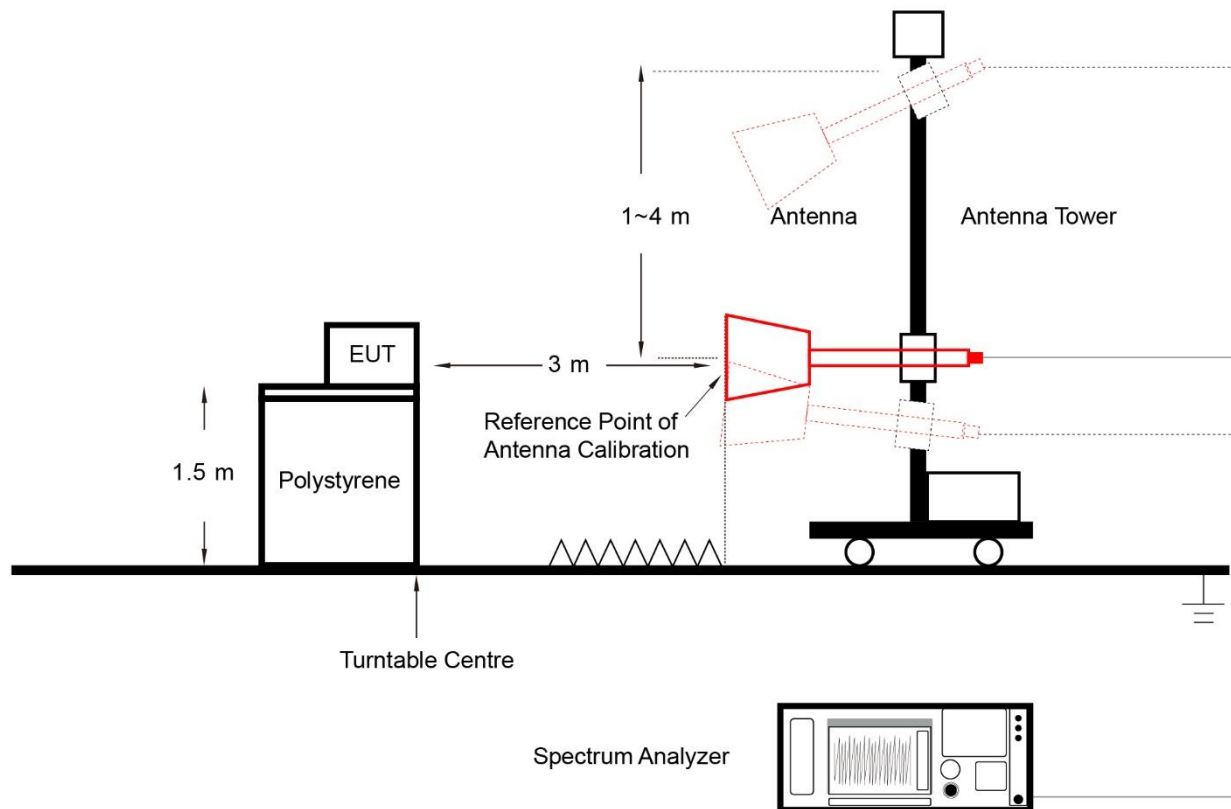

6.8.5. Test Result

Refer to Appendix A.9.

6.9. AC Conducted Emissions Measurement


6.9.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.9.2. Test Setup

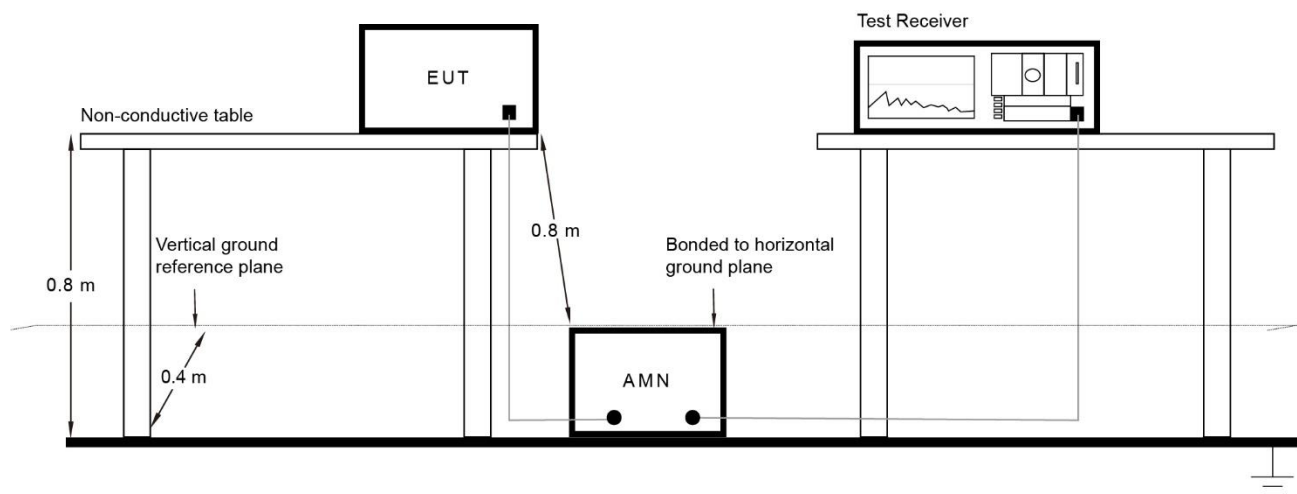

6.9.3. Test Result

Refer to Appendix A.10.

Appendix A – Test Result


A.1 Duty Cycle Test Result

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-02-27		


Test Mode	Duty Cycle	Test Mode	Duty Cycle
802.11ax-HE20	97.77%	802.11be-EHT40	95.95%
802.11ax-HE40	95.37%	802.11be-EHT80	92.73%
802.11ax-HE80	92.45%	802.11be-EHT160	88.20%
802.11ax-HE160	88.27%	802.11be-EHT320	83.38%
802.11be-EHT20	97.71%	--	--

Duty Cycle (T = Transmission Duration)


802.11ax-HE20 (T = 1.490ms)

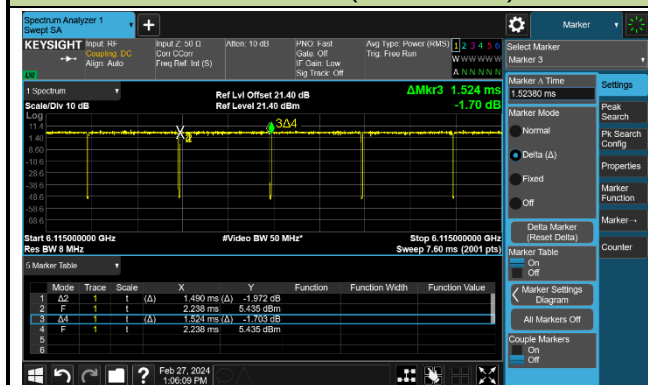


802.11ax-HE40 (T = 782.8μs)

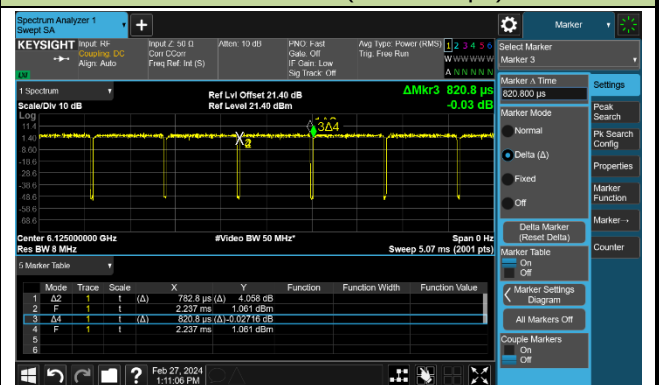

802.11ax-HE80 (T = 404.0μs)

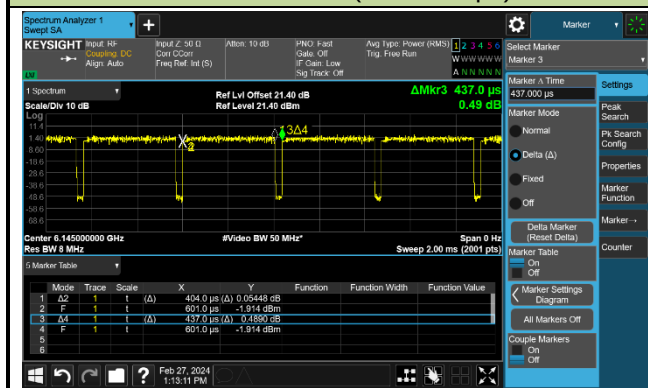


802.11ax-HE160 (T = 240.8μs)

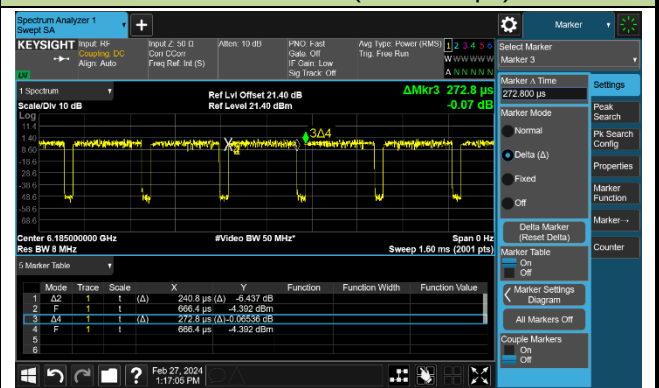


Duty Cycle (T = Transmission Duration)


802.11be-EHT20 (T = 1.493ms)

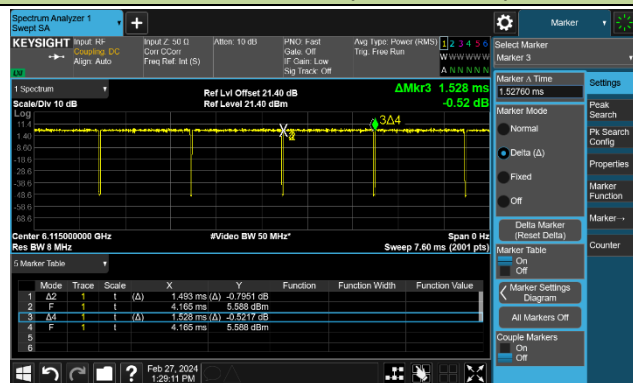


802.11be-EHT40 (T = 780.3µs)

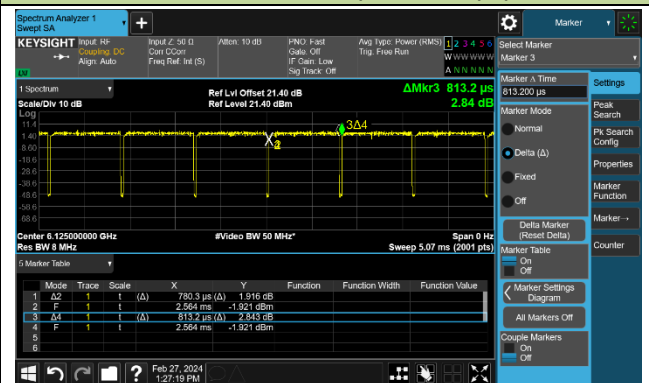


802.11be-EHT80 (T = 408.0µs)

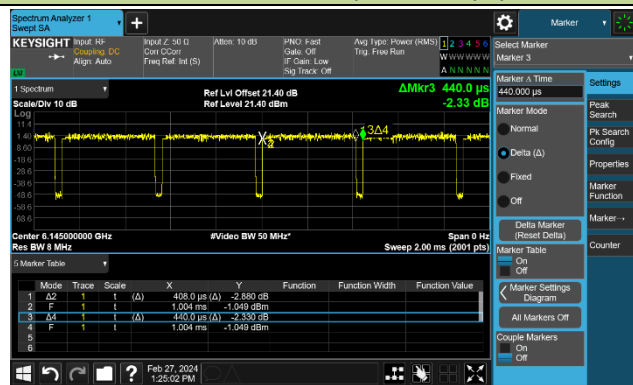

802.11be-EHT160 (T = 239.2µs)

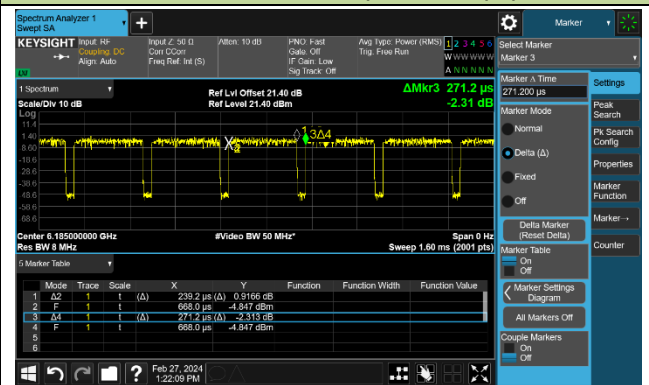

802.11be-EHT320 (T = 158.0µs)

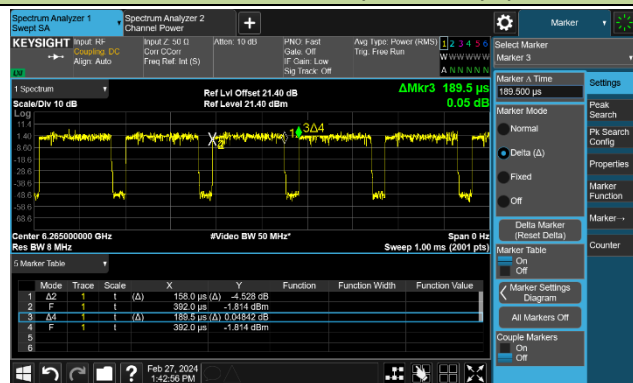

A.2 26dB & 99% Bandwidth Test Result

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-03-02	Filter	1#

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Test Limit (MHz)
802.11ax-HE20	MCS0	33	6115	21.37	18.994	≤ 320
802.11ax-HE20	MCS0	61	6255	21.73	19.045	≤ 320
802.11ax-HE20	MCS0	93	6415	21.21	18.960	≤ 320
802.11ax-HE20	MCS0	117	6535	21.39	19.045	≤ 320
802.11ax-HE20	MCS0	149	6695	21.31	19.034	≤ 320
802.11ax-HE20	MCS0	181	6855	21.44	19.041	≤ 320
802.11ax-HE40	MCS0	35	6125	40.19	37.733	≤ 320
802.11ax-HE40	MCS0	59	6245	40.64	37.770	≤ 320
802.11ax-HE40	MCS0	91	6405	40.92	37.721	≤ 320
802.11ax-HE40	MCS0	123	6565	40.35	37.724	≤ 320
802.11ax-HE40	MCS0	147	6685	40.22	37.679	≤ 320
802.11ax-HE40	MCS0	179	6845	40.31	37.729	≤ 320
802.11ax-HE80	MCS0	39	6145	81.12	77.183	≤ 320
802.11ax-HE80	MCS0	55	6225	81.57	77.190	≤ 320
802.11ax-HE80	MCS0	87	6385	81.57	77.192	≤ 320
802.11ax-HE80	MCS0	135	6625	81.48	77.167	≤ 320
802.11ax-HE80	MCS0	151	6705	81.44	77.263	≤ 320
802.11ax-HE80	MCS0	167	6785	81.60	77.084	≤ 320
802.11ax-HE160	MCS0	47	6185	162.7	155.72	≤ 320
802.11ax-HE160	MCS0	79	6345	163.9	156.31	≤ 320
802.11ax-HE160	MCS0	143	6665	163.7	156.15	≤ 320
802.11be-EHT20	MCS0	33	6115	21.32	19.115	≤ 320
802.11be-EHT20	MCS0	61	6255	21.30	19.062	≤ 320
802.11be-EHT20	MCS0	93	6415	21.36	19.067	≤ 320
802.11be-EHT20	MCS0	117	6535	21.29	19.056	≤ 320
802.11be-EHT20	MCS0	149	6695	21.56	19.065	≤ 320
802.11be-EHT20	MCS0	181	6855	21.31	19.021	≤ 320
802.11be-EHT40	MCS0	35	6125	40.44	37.791	≤ 320
802.11be-EHT40	MCS0	59	6245	40.13	37.793	≤ 320
802.11be-EHT40	MCS0	91	6405	40.40	37.756	≤ 320

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Test Limit (MHz)
802.11be-EHT40	MCS0	123	6565	40.48	37.714	≤ 320
802.11be-EHT40	MCS0	147	6685	40.28	37.759	≤ 320
802.11be-EHT40	MCS0	179	6845	40.56	37.824	≤ 320
802.11be-EHT80	MCS0	39	6145	81.34	77.106	≤ 320
802.11be-EHT80	MCS0	55	6225	81.13	77.079	≤ 320
802.11be-EHT80	MCS0	87	6385	81.33	77.184	≤ 320
802.11be-EHT80	MCS0	135	6625	81.37	77.159	≤ 320
802.11be-EHT80	MCS0	151	6705	81.04	77.134	≤ 320
802.11be-EHT80	MCS0	167	6785	81.45	77.219	≤ 320
802.11be-EHT160	MCS0	47	6185	164.2	156.03	≤ 320
802.11be-EHT160	MCS0	79	6345	162.8	156.37	≤ 320
802.11be-EHT160	MCS0	143	6665	164.8	156.25	≤ 320
802.11be-EHT320	MCS0	63	6265	326.9	313.76	≤ 320


Note:

For channels with a nominal bandwidth less than 320 MHz compliance is demonstrated by way of the 26 dB EBW.


For channels with a nominal bandwidth of 320 MHz compliance is demonstrated by way of the 99% BW.

802.11ax-HE20 26dB & 99% Bandwidth


Channel 33 (6115MHz)

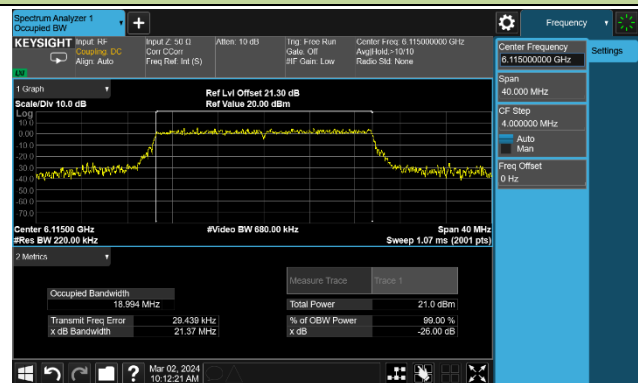


Channel 61 (6255MHz)

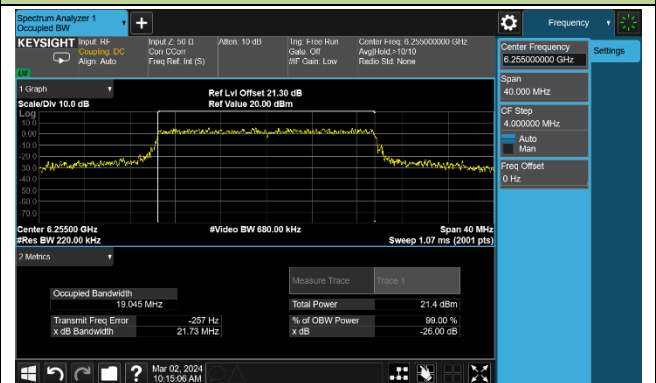


Channel 93 (6415MHz)

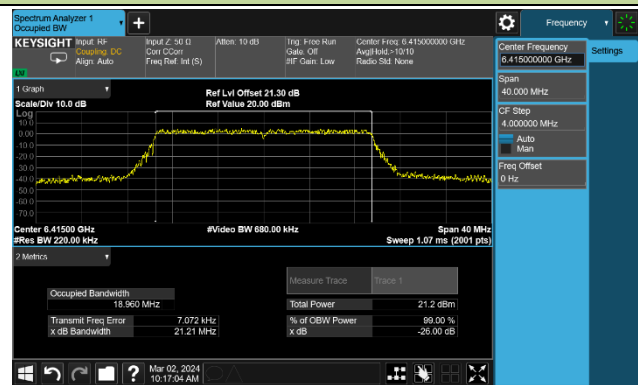


Channel 117 (6535MHz)

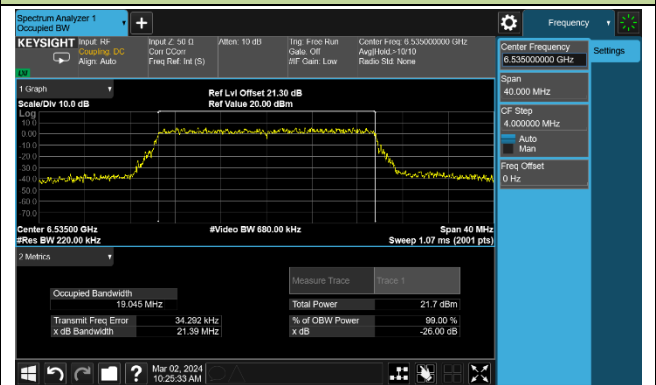

Channel 149 (6695MHz)

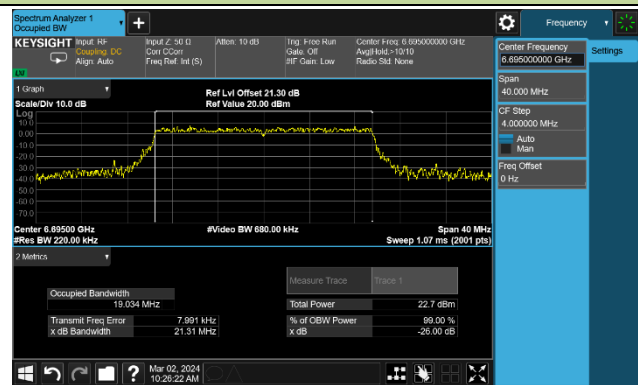


Channel 181 (6855MHz)

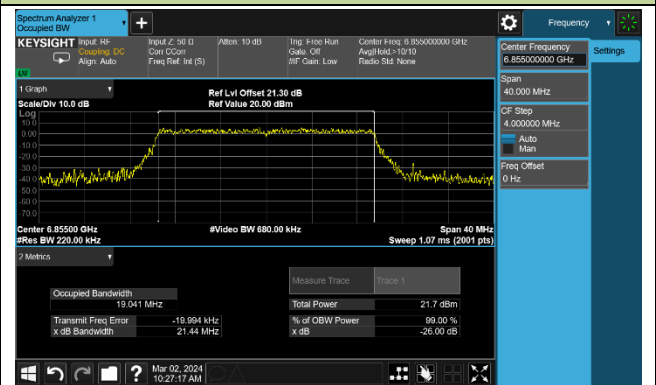


802.11ax-HE40 26dB & 99% Bandwidth


Channel 35 (6125MHz)

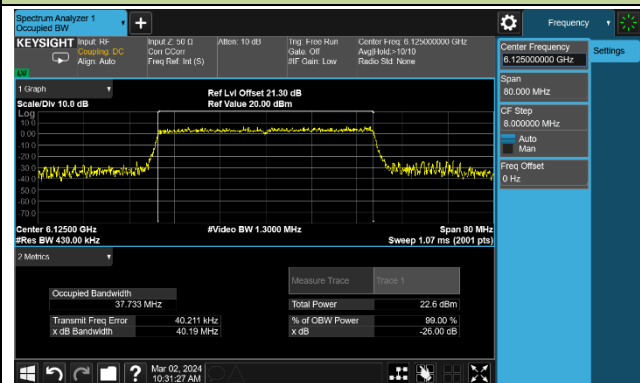


Channel 59 (6245MHz)

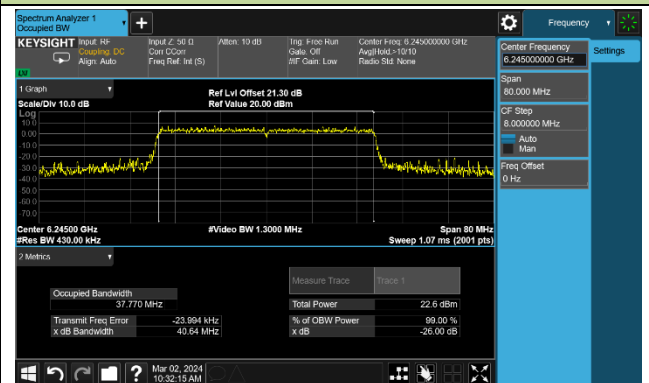


Channel 91 (6405MHz)

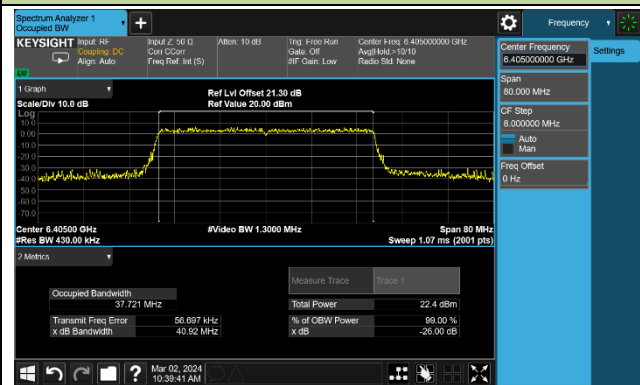


Channel 123 (6565MHz)

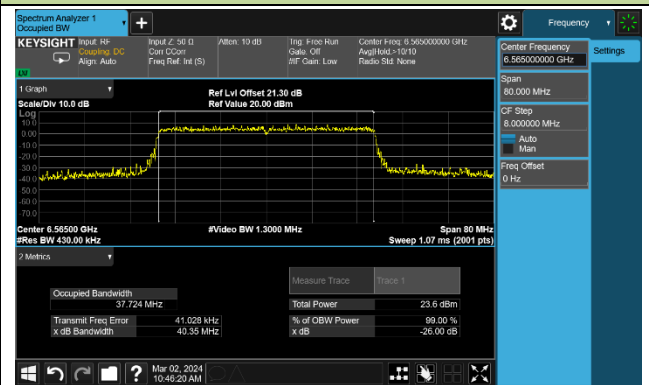

Channel 147 (6685MHz)

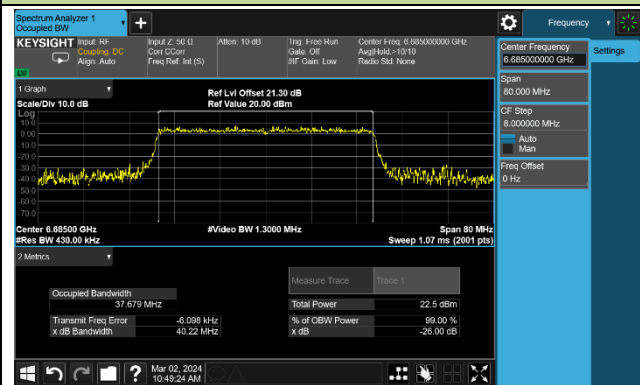


Channel 179 (6845MHz)

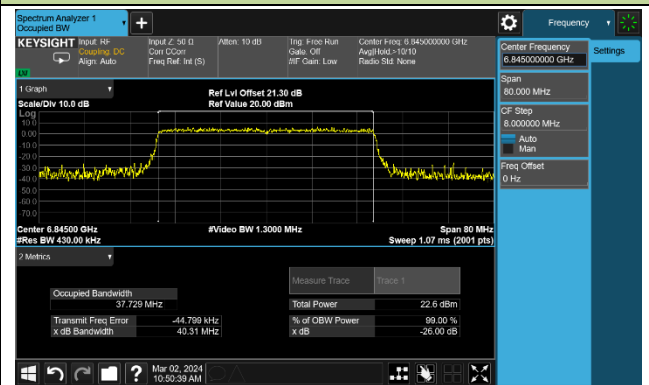


802.11ax-HE80 26dB & 99% Bandwidth


Channel 39 (6145MHz)

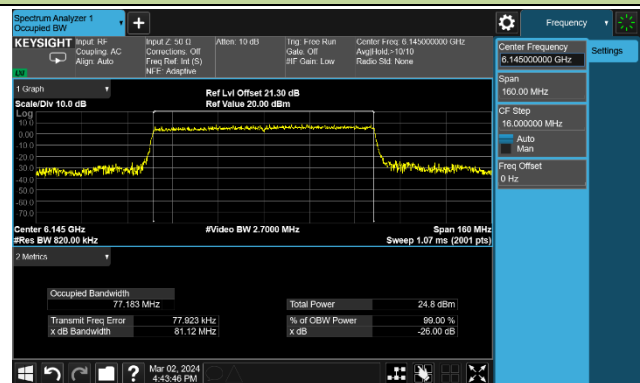


Channel 55 (6225MHz)

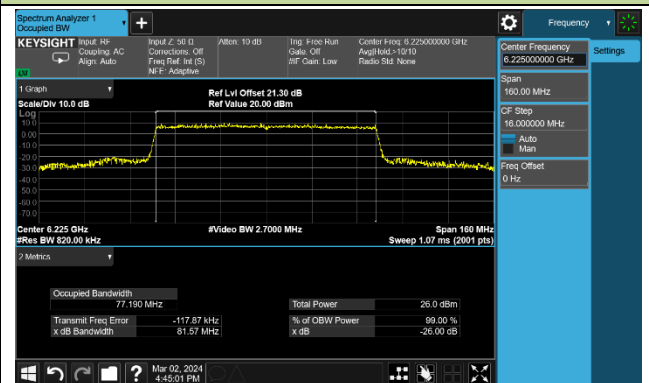


Channel 87 (6385MHz)

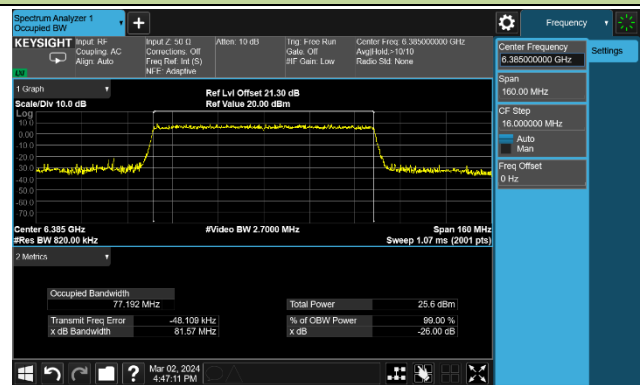


Channel 135 (6625MHz)

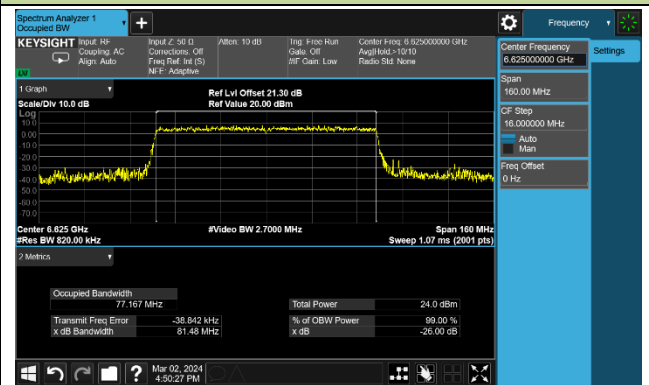

Channel 151 (6705MHz)

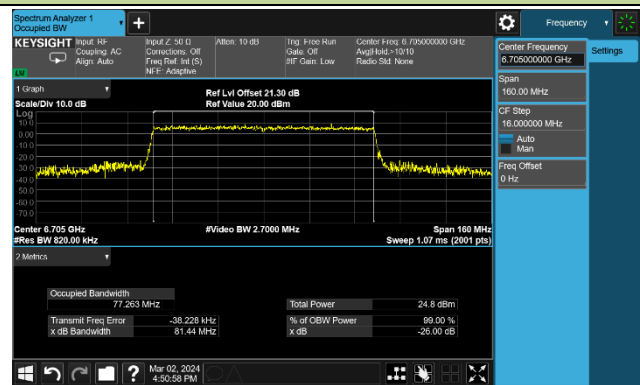


Channel 167 (6785MHz)

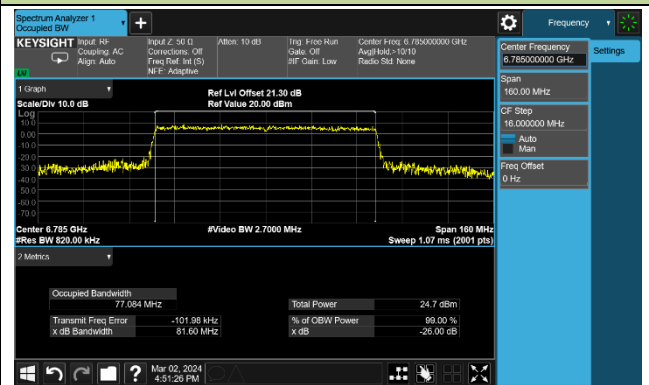


802.11ax-HE160 26dB & 99% Bandwidth


Channel 47 (6185MHz)

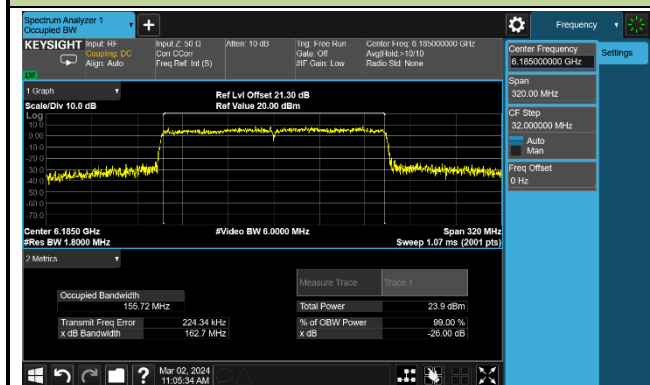

Channel 79 (6345MHz)

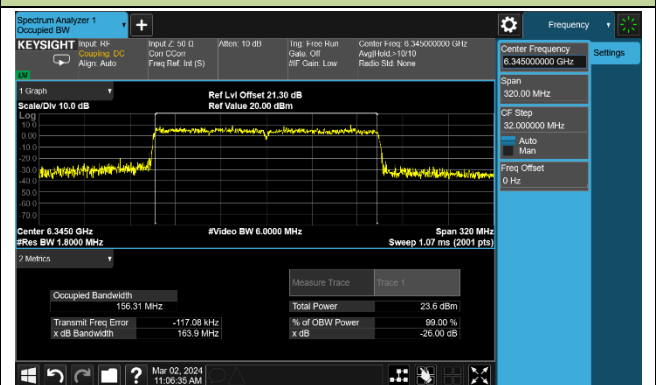


Channel 143 (6665MHz)

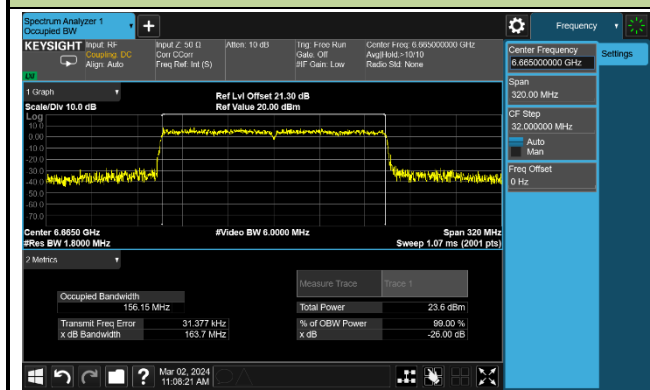


802.11be-EHT20 26dB & 99% Bandwidth


Channel 33 (6115MHz)

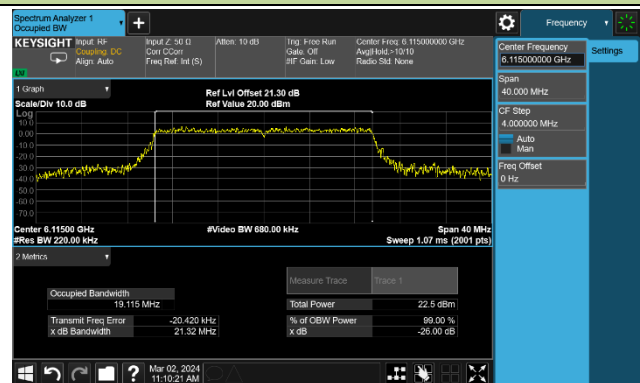


Channel 61 (6255MHz)

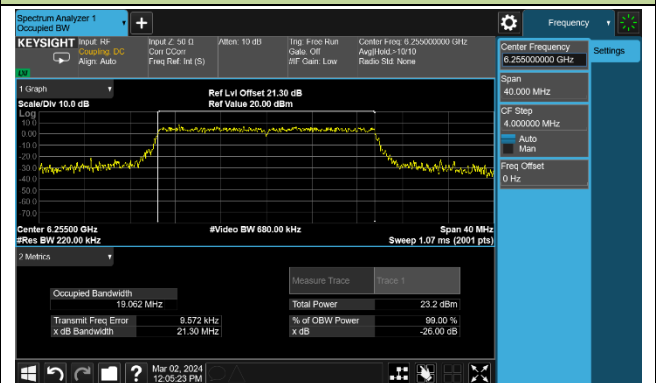


Channel 93 (6415MHz)

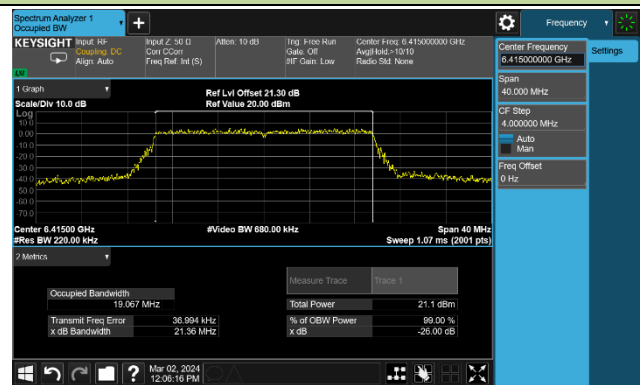


Channel 117 (6535MHz)

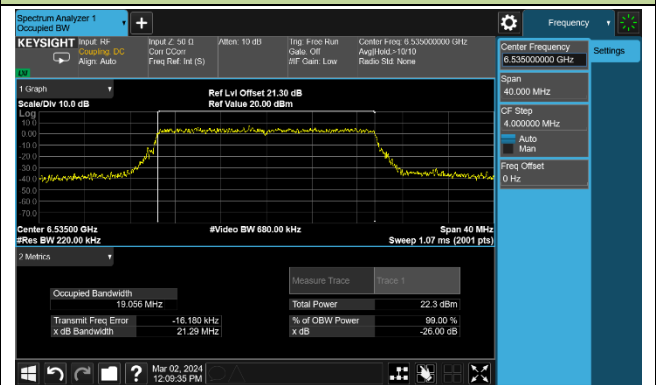

Channel 149 (6695MHz)

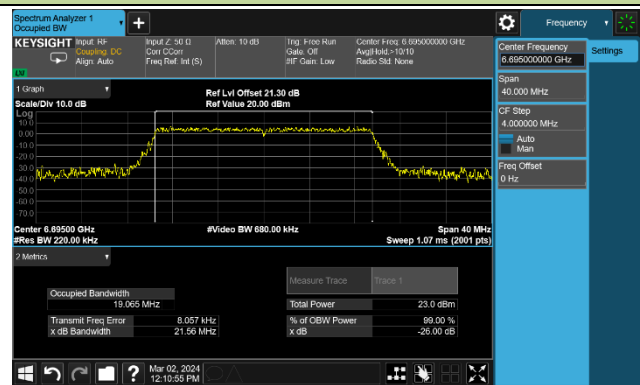


Channel 181 (6855MHz)

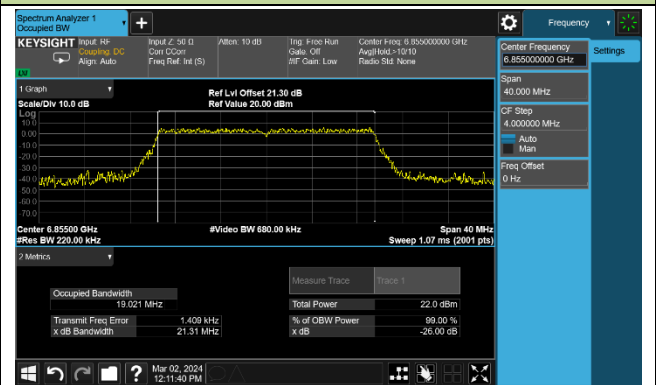


802.11be-EHT40 26dB & 99% Bandwidth


Channel 35 (6125MHz)

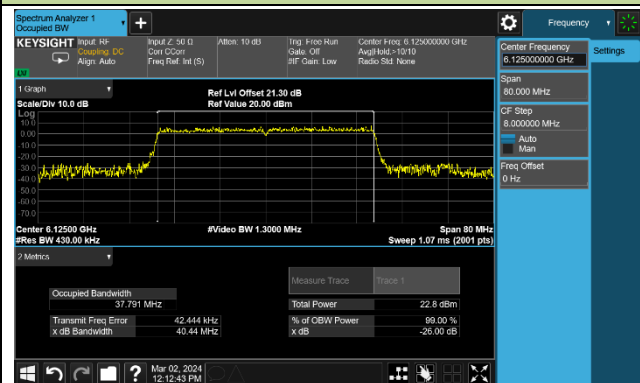


Channel 59 (6245MHz)

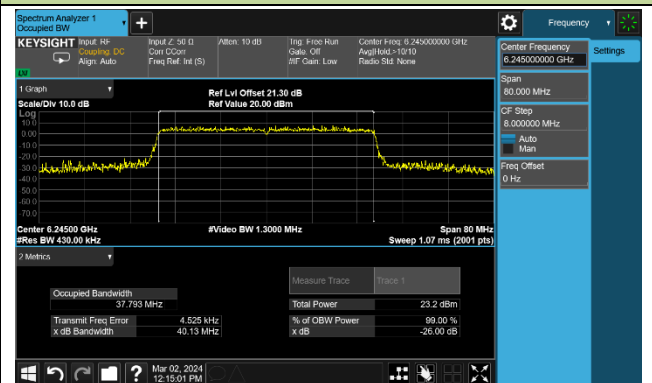


Channel 91 (6405MHz)

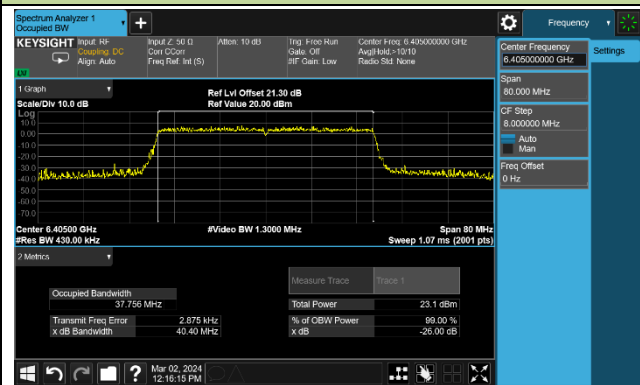


Channel 123 (6565MHz)

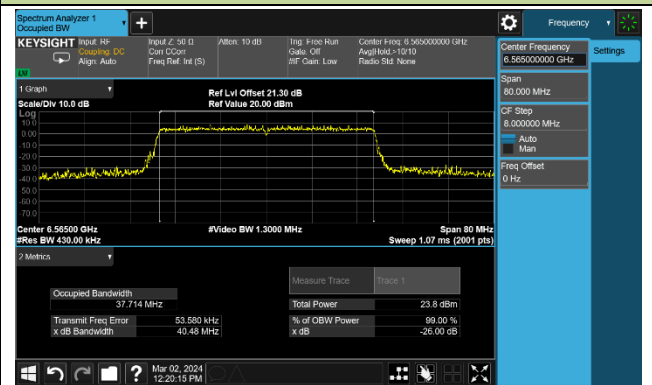

Channel 147 (6685MHz)

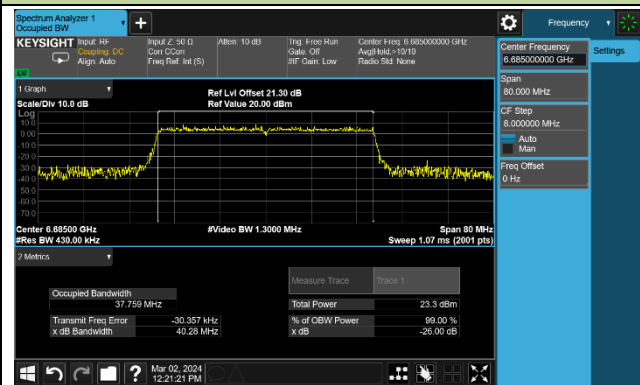


Channel 179 (6845MHz)

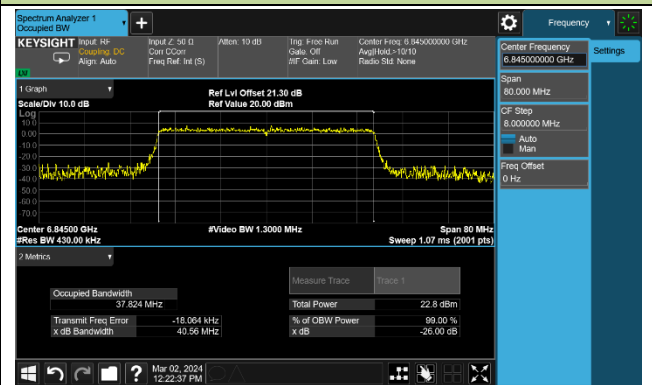


802.11be-EHT80 26dB & 99% Bandwidth


Channel 39 (6145MHz)

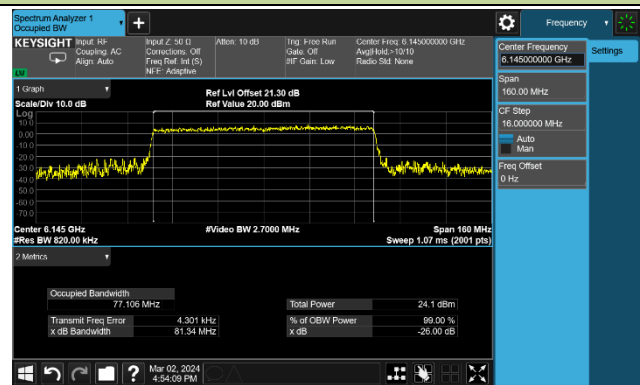


Channel 55 (6225MHz)

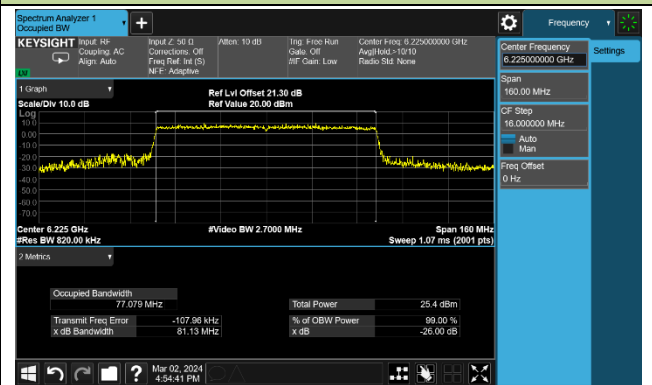


Channel 87 (6385MHz)

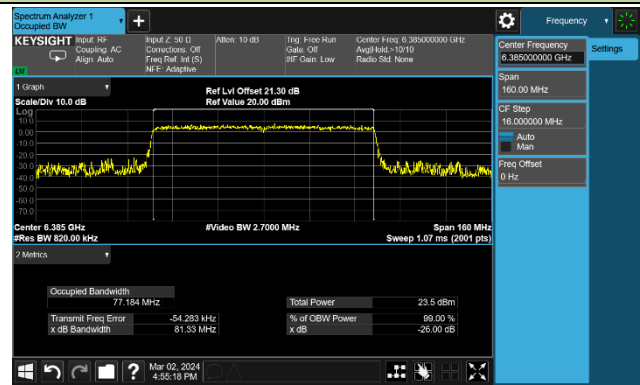


Channel 135 (6625MHz)

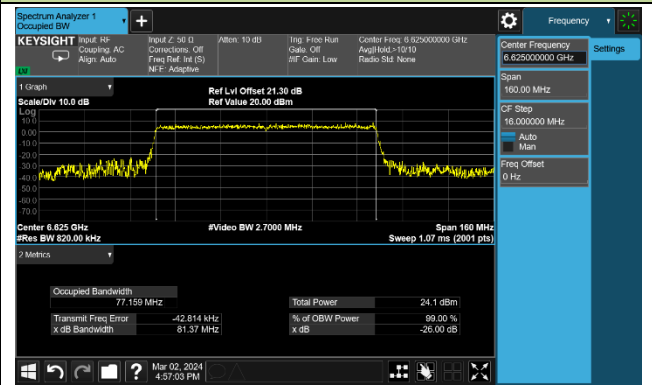

Channel 151 (6705MHz)

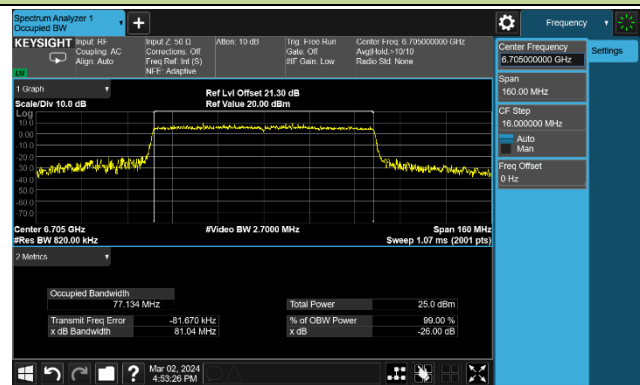


Channel 167 (6785MHz)

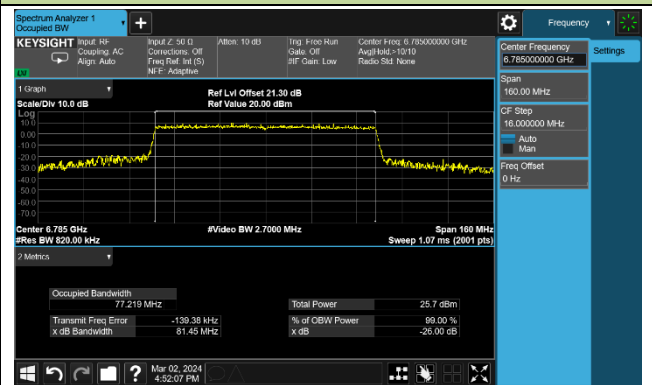


802.11be-EHT160 26dB & 99% Bandwidth


Channel 47 (6185MHz)

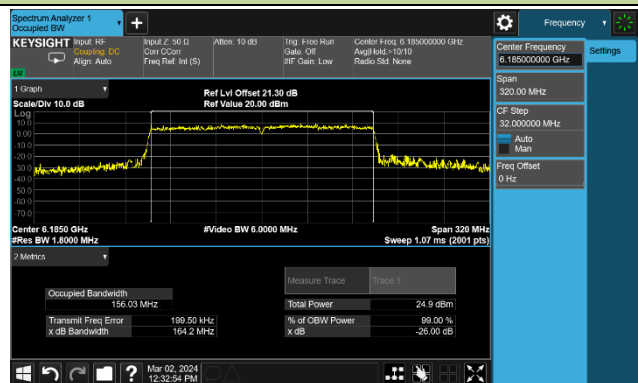

Channel 79 (6345MHz)

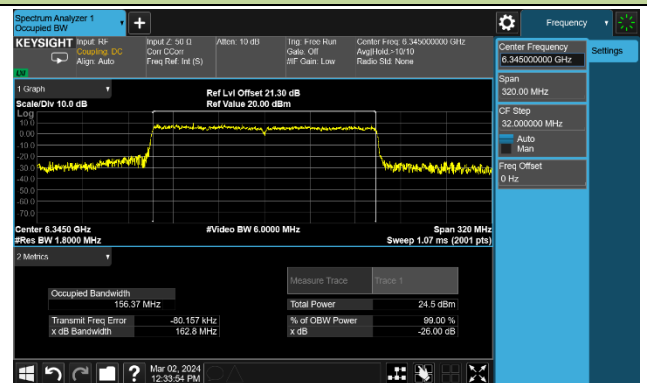


Channel 143 (6665MHz)

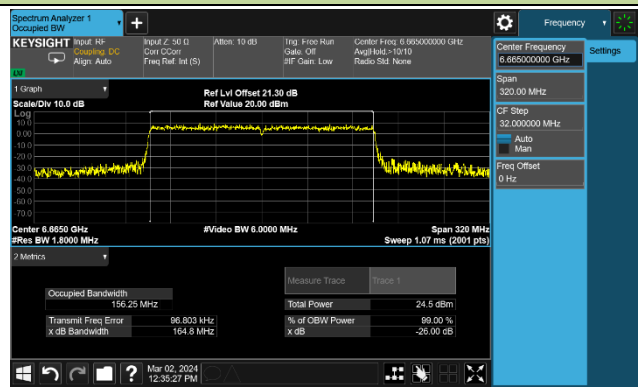

802.11be-EHT320 26dB & 99% Bandwidth

Channel 63 (6265MHz)

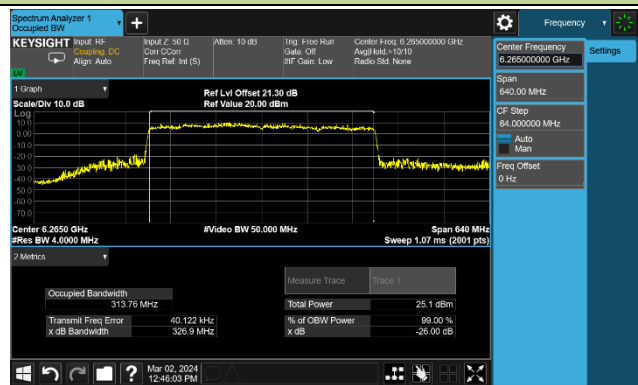

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-03-02	Filter	2#

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Test Limit (MHz)
802.11ax-HE20	MCS0	1	5955	21.57	19.094	≤ 320
802.11ax-HE20	MCS0	49	6195	21.16	19.054	≤ 320
802.11ax-HE20	MCS0	93	6415	21.21	19.065	≤ 320
802.11ax-HE40	MCS0	3	5965	42.16	37.652	≤ 320
802.11ax-HE40	MCS0	51	6205	40.12	37.756	≤ 320
802.11ax-HE40	MCS0	91	6405	40.17	37.700	≤ 320
802.11ax-HE80	MCS0	7	5985	81.61	77.005	≤ 320
802.11ax-HE80	MCS0	55	6225	81.32	77.151	≤ 320
802.11ax-HE80	MCS0	87	6385	81.57	77.239	≤ 320
802.11ax-HE160	MCS0	15	6025	162.5	155.37	≤ 320
802.11ax-HE160	MCS0	47	6185	162.5	156.49	≤ 320
802.11ax-HE160	MCS0	79	6345	162.7	156.34	≤ 320
802.11be-EHT20	MCS0	1	5955	21.34	19.107	≤ 320
802.11be-EHT20	MCS0	49	6195	21.53	19.012	≤ 320
802.11be-EHT20	MCS0	93	6415	21.23	19.024	≤ 320
802.11be-EHT40	MCS0	3	5965	40.51	37.708	≤ 320
802.11be-EHT40	MCS0	51	6205	40.28	37.684	≤ 320
802.11be-EHT40	MCS0	91	6405	40.36	37.675	≤ 320
802.11be-EHT80	MCS0	7	5985	81.88	77.069	≤ 320
802.11be-EHT80	MCS0	55	6225	81.10	77.292	≤ 320
802.11be-EHT80	MCS0	87	6385	81.18	77.302	≤ 320
802.11be-EHT160	MCS0	15	6025	174.8	155.52	≤ 320
802.11be-EHT160	MCS0	47	6185	163.2	156.43	≤ 320
802.11be-EHT160	MCS0	79	6345	163.1	156.36	≤ 320
802.11be-EHT320	MCS0	31	6105	326.6	313.47	≤ 320
802.11be-EHT320	MCS0	63	6265	326.9	314.67	≤ 320


Note:

For channels with a nominal bandwidth less than 320 MHz compliance is demonstrated by way of the 26 dB EBW.


For channels with a nominal bandwidth of 320 MHz compliance is demonstrated by way of the 99% BW.

802.11ax-HE20 26dB & 99% Bandwidth


Channel 1 (5955MHz)

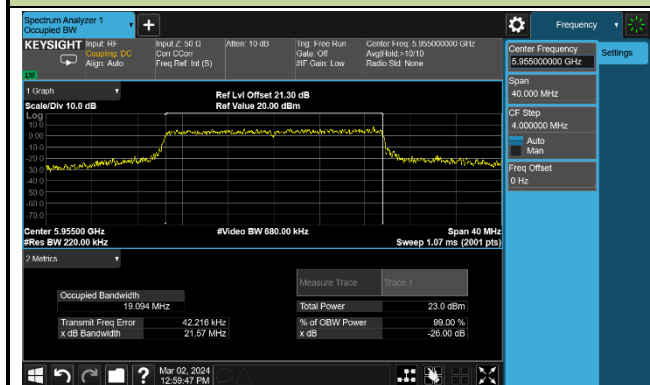

Channel 49 (6195MHz)

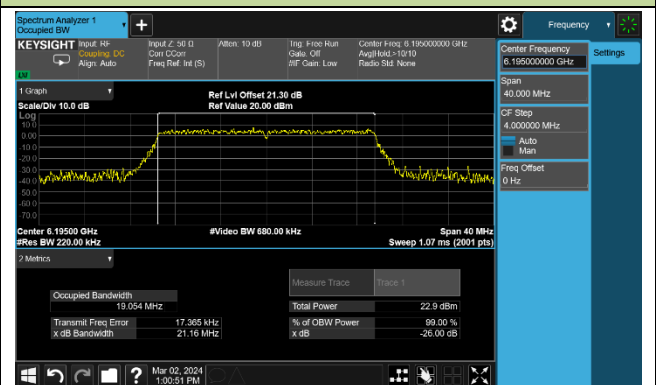


Channel 93 (6415MHz)

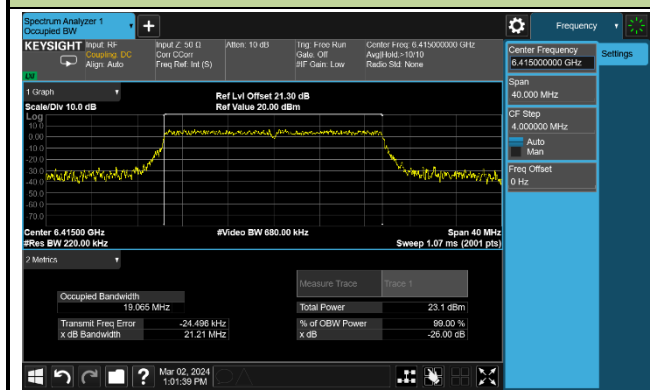


802.11ax-HE40 26dB & 99% Bandwidth


Channel 3 (5965MHz)

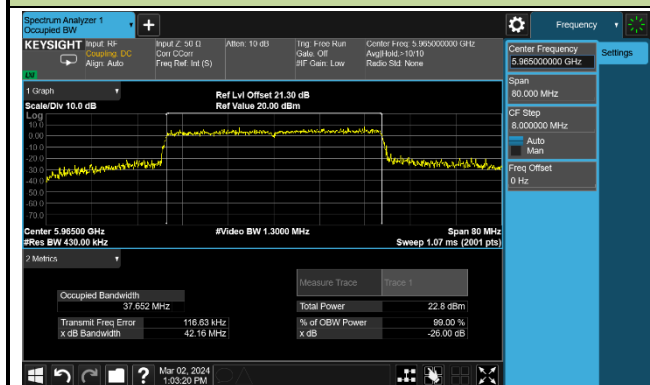

Channel 51 (6205MHz)

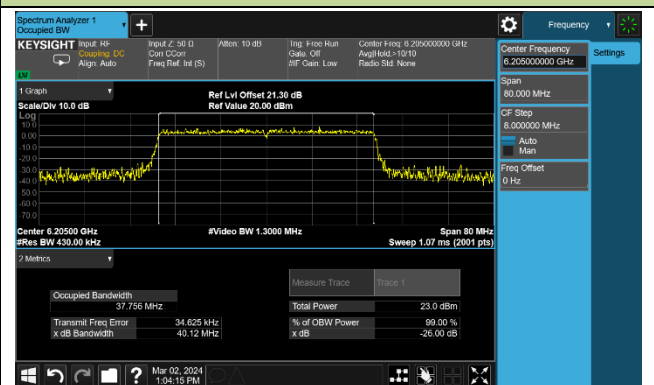


Channel 91 (6405MHz)

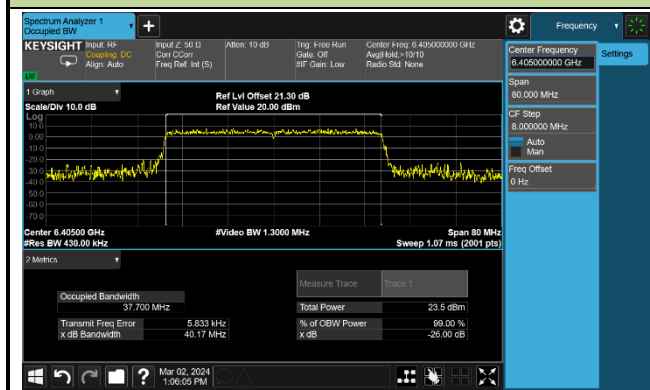


802.11ax-HE80 26dB & 99% Bandwidth


Channel 7 (5985MHz)

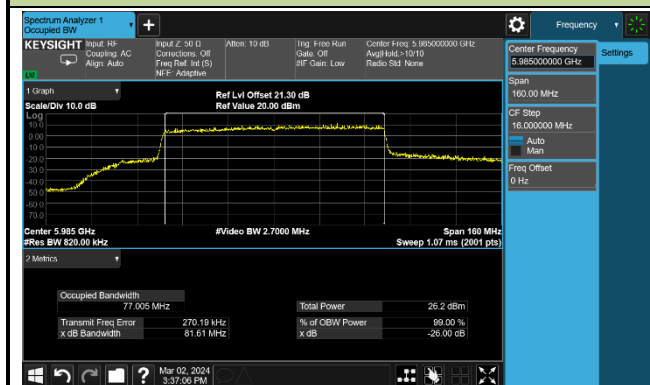

Channel 55 (6225MHz)

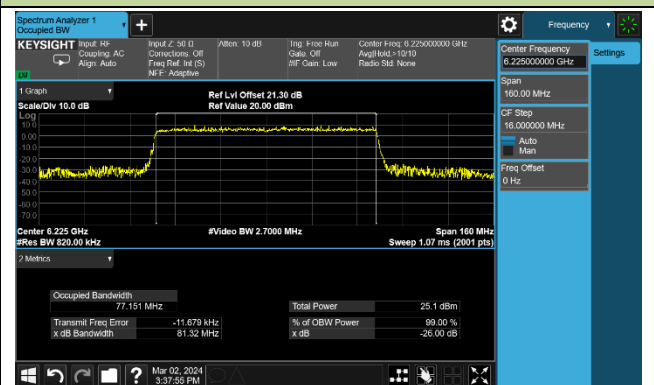


Channel 87 (6385MHz)

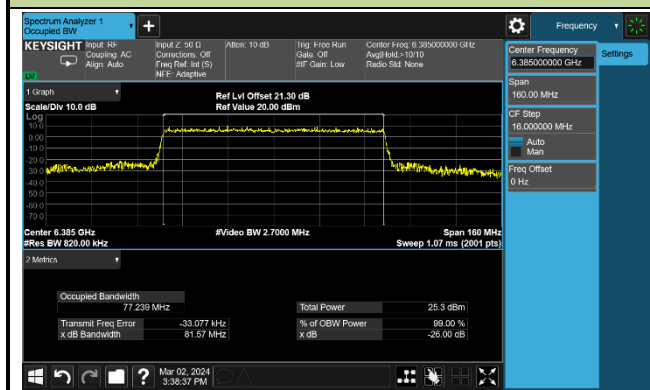


802.11ax-HE160 26dB & 99% Bandwidth


Channel 15 (6025MHz)

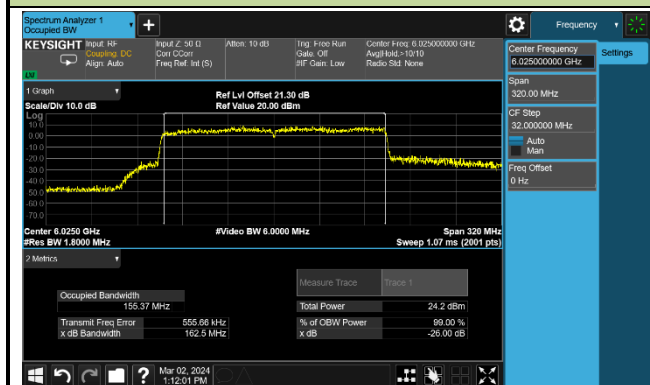

Channel 47 (6185MHz)

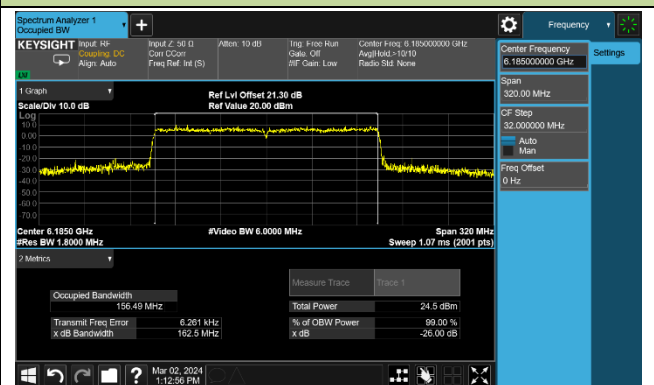


Channel 79 (6345MHz)

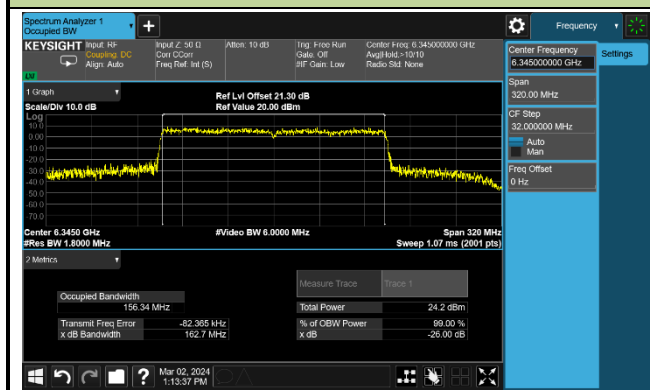


802.11be-EHT20 26dB & 99% Bandwidth


Channel 1 (5955MHz)

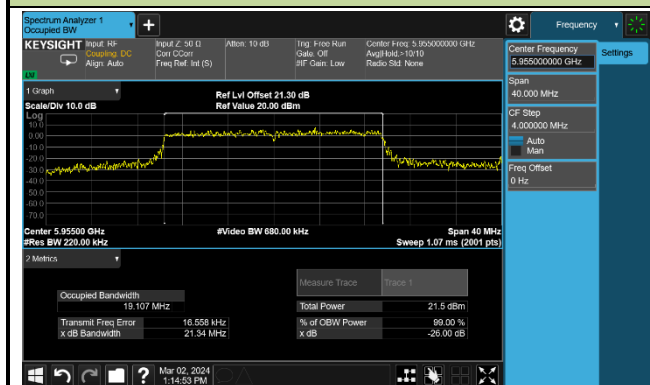


Channel 49 (6195MHz)

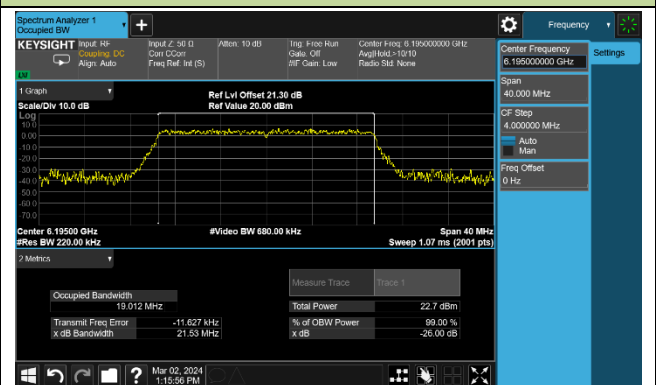


Channel 93 (6415MHz)

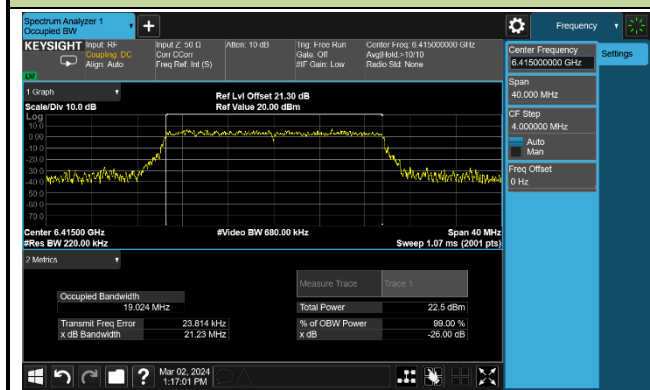




802.11be-EHT80 26dB & 99% Bandwidth

Channel 7 (5985MHz)

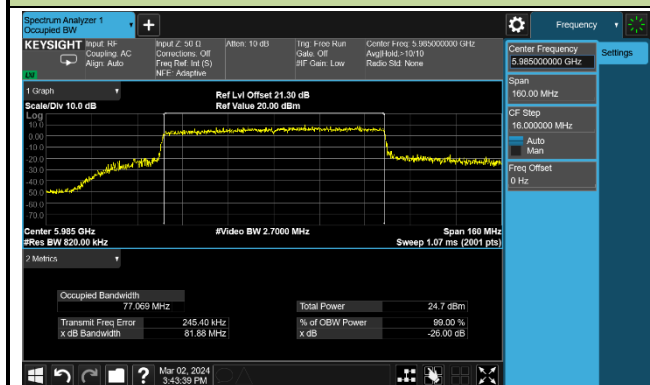

Channel 55 (6225MHz)

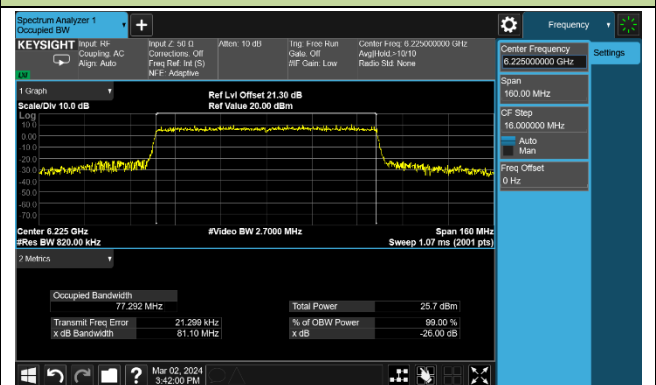

Channel 87 (6385MHz)

