

Product	Access Point	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-03-03 ~ 2024-03-05
Test Mode	802.11ax-HE80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9967.5	35.1	13.0	48.1	88.2	-40.1	Peak	Horizontal
	11387.0	34.7	13.5	48.2	74.0	-25.8	Peak	Horizontal
	12007.5	36.1	12.4	48.5	74.0	-25.5	Peak	Horizontal
*	13095.5	34.6	12.5	47.1	88.2	-41.1	Peak	Horizontal
*	10171.5	33.8	13.3	47.1	88.2	-41.1	Peak	Vertical
	10979.0	34.8	14.0	48.8	74.0	-25.2	Peak	Vertical
	11982.0	36.1	12.3	48.4	74.0	-25.6	Peak	Vertical
*	13070.0	34.5	12.6	47.1	88.2	-41.1	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-03-03 ~ 2024-03-05
Test Mode	802.11ax-HE160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	8361.0	37.8	8.8	46.6	74.0	-27.4	Peak	Horizontal
	8701.0	37.7	10.0	47.7	88.2	-40.5	Peak	Horizontal
	10001.5	36.9	12.8	49.7	88.2	-38.5	Peak	Horizontal
*	11523.0	37.2	13.6	50.8	74.0	-23.2	Peak	Horizontal
*	7902.0	37.2	9.0	46.2	88.2	-42.0	Peak	Vertical
	8089.0	37.2	9.2	46.4	74.0	-27.6	Peak	Vertical
	9755.0	36.9	12.9	49.8	88.2	-38.4	Peak	Vertical
*	11072.5	36.7	14.0	50.7	74.0	-23.3	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-03-03 ~ 2024-03-05
Test Mode	802.11ax-HE160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8055.0	37.1	9.5	46.6	74.0	-27.4	Peak	Horizontal
*	8913.5	37.7	10.3	48.0	88.2	-40.2	Peak	Horizontal
*	9959.0	37.7	12.9	50.6	88.2	-37.6	Peak	Horizontal
	11421.0	37.4	13.5	50.9	74.0	-23.1	Peak	Horizontal
	8148.5	37.2	9.3	46.5	74.0	-27.5	Peak	Vertical
*	8820.0	38.3	10.3	48.6	88.2	-39.6	Peak	Vertical
*	9738.0	37.3	13.0	50.3	88.2	-37.9	Peak	Vertical
	11344.5	37.4	13.3	50.7	74.0	-23.3	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-03-03 ~ 2024-03-05
Test Mode	802.11ax-HE160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8471.5	37.8	9.2	47.0	74.0	-27.0	Peak	Horizontal
*	8752.0	38.1	10.0	48.1	88.2	-40.1	Peak	Horizontal
*	9653.0	37.3	12.7	50.0	88.2	-38.2	Peak	Horizontal
	10962.0	36.8	14.1	50.9	74.0	-23.1	Peak	Horizontal
	8471.5	38.8	9.2	48.0	74.0	-26.0	Peak	Vertical
*	8845.5	37.7	10.3	48.0	88.2	-40.2	Peak	Vertical
*	9738.0	37.5	13.0	50.5	88.2	-37.7	Peak	Vertical
	11480.5	37.3	13.6	50.9	74.0	-23.1	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-03-03 ~ 2024-03-05
Test Mode	802.11be-EHT20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8327.0	37.5	8.7	46.2	74.0	-27.8	Peak	Horizontal
*	8837.0	38.3	10.3	48.6	88.2	-39.6	Peak	Horizontal
*	9942.0	36.7	12.9	49.6	88.2	-38.6	Peak	Horizontal
	11395.5	37.4	13.5	50.9	74.0	-23.1	Peak	Horizontal
	8293.0	37.9	8.8	46.7	74.0	-27.3	Peak	Vertical
*	8828.5	38.1	10.3	48.4	88.2	-39.8	Peak	Vertical
*	9806.0	37.5	13.2	50.7	88.2	-37.5	Peak	Vertical
	11106.5	37.2	13.7	50.9	74.0	-23.1	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-03-03 ~ 2024-03-05
Test Mode	802.11be-EHT20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8242.0	37.7	8.8	46.5	74.0	-27.5	Peak	Horizontal
*	8905.0	38.1	10.3	48.4	88.2	-39.8	Peak	Horizontal
*	9729.5	37.5	13.0	50.5	88.2	-37.7	Peak	Horizontal
	10783.5	36.5	14.1	50.6	74.0	-23.4	Peak	Horizontal
	8463.0	38.3	9.3	47.6	74.0	-26.4	Peak	Vertical
*	8650.0	38.1	9.7	47.8	88.2	-40.4	Peak	Vertical
*	10137.5	36.6	13.1	49.7	88.2	-38.5	Peak	Vertical
	11463.5	37.4	13.5	50.9	74.0	-23.1	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-03-03 ~ 2024-03-05
Test Mode	802.11be-EHT20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8267.5	38.1	8.6	46.7	74.0	-27.3	Peak	Horizontal
*	8743.5	38.1	10.1	48.2	88.2	-40.0	Peak	Horizontal
*	9831.5	37.4	13.1	50.5	88.2	-37.7	Peak	Horizontal
	11514.5	37.4	13.6	51.0	74.0	-23.0	Peak	Horizontal
	8352.5	37.6	8.7	46.3	74.0	-27.7	Peak	Vertical
*	8607.5	37.6	9.6	47.2	88.2	-41.0	Peak	Vertical
*	9831.5	36.9	13.1	50.0	88.2	-38.2	Peak	Vertical
	11531.5	37.1	13.5	50.6	74.0	-23.4	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-03-03 ~ 2024-03-05
Test Mode	802.11be-EHT40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8284.5	38.3	8.6	46.9	74.0	-27.1	Peak	Horizontal
*	8769.0	37.7	10.2	47.9	88.2	-40.3	Peak	Horizontal
*	9865.5	36.9	13.0	49.9	88.2	-38.3	Peak	Horizontal
	11497.5	37.3	13.7	51.0	74.0	-23.0	Peak	Horizontal
	8233.5	38.1	8.8	46.9	74.0	-27.1	Peak	Vertical
*	8769.0	37.7	10.2	47.9	88.2	-40.3	Peak	Vertical
*	9942.0	37.7	12.9	50.6	88.2	-37.6	Peak	Vertical
	11778.0	38.5	12.4	50.9	74.0	-23.1	Peak	Vertical

Note 1: “\*\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-03-03 ~ 2024-03-05
Test Mode	802.11be-EHT40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8097.5	37.3	9.4	46.7	74.0	-27.3	Peak	Horizontal
*	8769.0	38.0	10.2	48.2	88.2	-40.0	Peak	Horizontal
*	9925.0	36.8	13.0	49.8	88.2	-38.4	Peak	Horizontal
	11633.5	37.8	12.8	50.6	74.0	-23.4	Peak	Horizontal
	8318.5	38.0	8.7	46.7	74.0	-27.3	Peak	Vertical
*	8794.5	38.5	10.3	48.8	88.2	-39.4	Peak	Vertical
*	9763.5	37.3	12.9	50.2	88.2	-38.0	Peak	Vertical
	11327.5	37.4	13.3	50.7	74.0	-23.3	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-03-03 ~ 2024-03-05
Test Mode	802.11be-EHT40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8301.5	38.2	8.7	46.9	74.0	-27.1	Peak	Horizontal
*	8684.0	38.3	9.9	48.2	88.2	-40.0	Peak	Horizontal
*	9916.5	37.1	12.9	50.0	88.2	-38.2	Peak	Horizontal
	11055.5	36.8	14.1	50.9	74.0	-23.1	Peak	Horizontal
	8276.0	38.2	8.5	46.7	74.0	-27.3	Peak	Vertical
*	8769.0	38.2	10.2	48.4	88.2	-39.8	Peak	Vertical
*	9984.5	36.9	13.1	50.0	88.2	-38.2	Peak	Vertical
	10792.0	36.6	14.3	50.9	74.0	-23.1	Peak	Vertical

Note 1: “\*\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-03-03 ~ 2024-03-05
Test Mode	802.11be-EHT80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8208.0	37.6	8.9	46.5	74.0	-27.5	Peak	Horizontal
*	8964.5	37.4	10.6	48.0	88.2	-40.2	Peak	Horizontal
*	9746.5	36.6	12.9	49.5	88.2	-38.7	Peak	Horizontal
	11506.0	37.4	13.6	51.0	74.0	-23.0	Peak	Horizontal
	8454.5	36.9	9.2	46.1	74.0	-27.9	Peak	Vertical
*	8947.5	37.4	10.3	47.7	88.2	-40.5	Peak	Vertical
*	9755.0	37.7	12.9	50.6	88.2	-37.6	Peak	Vertical
	11489.0	37.2	13.8	51.0	74.0	-23.0	Peak	Vertical

Note 1: “\*\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-03-03 ~ 2024-03-05
Test Mode	802.11be-EHT80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8352.5	38.3	8.7	47.0	74.0	-27.0	Peak	Horizontal
*	8735.0	37.7	10.1	47.8	88.2	-40.4	Peak	Horizontal
*	9967.5	37.4	13.0	50.4	88.2	-37.8	Peak	Horizontal
	11251.0	37.3	13.4	50.7	74.0	-23.3	Peak	Horizontal
	8310.0	38.0	8.7	46.7	74.0	-27.3	Peak	Vertical
*	8973.0	37.2	10.6	47.8	88.2	-40.4	Peak	Vertical
*	9882.5	36.5	13.2	49.7	88.2	-38.5	Peak	Vertical
	11157.5	36.6	13.8	50.4	74.0	-23.6	Peak	Vertical

Note 1: “\*\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-03-03 ~ 2024-03-05
Test Mode	802.11be-EHT80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8182.5	37.1	8.9	46.0	74.0	-28.0	Peak	Horizontal
*	8854.0	38.0	10.3	48.3	88.2	-39.9	Peak	Horizontal
*	10078.0	36.9	13.2	50.1	88.2	-38.1	Peak	Horizontal
	11259.5	37.6	13.3	50.9	74.0	-23.1	Peak	Horizontal
	8429.0	38.8	8.9	47.7	74.0	-26.3	Peak	Vertical
*	8760.5	38.0	10.1	48.1	88.2	-40.1	Peak	Vertical
*	9950.5	37.1	12.8	49.9	88.2	-38.3	Peak	Vertical
	11387.0	37.5	13.5	51.0	74.0	-23.0	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-03-03 ~ 2024-03-05
Test Mode	802.11be-EHT160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8446.0	37.9	9.0	46.9	74.0	-27.1	Peak	Horizontal
*	8607.5	38.4	9.6	48.0	88.2	-40.2	Peak	Horizontal
*	9746.5	37.3	12.9	50.2	88.2	-38.0	Peak	Horizontal
	11089.5	37.0	13.9	50.9	74.0	-23.1	Peak	Horizontal
	8446.0	37.9	9.0	46.9	74.0	-27.1	Peak	Vertical
*	8607.5	38.4	9.6	48.0	88.2	-40.2	Peak	Vertical
*	9746.5	37.3	12.9	50.2	88.2	-38.0	Peak	Vertical
	11089.5	37.0	13.9	50.9	74.0	-23.1	Peak	Vertical

Note 1: “\*\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-03-03 ~ 2024-03-05
Test Mode	802.11be-EHT160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8310.0	37.8	8.7	46.5	74.0	-27.5	Peak	Horizontal
*	8786.0	37.4	10.3	47.7	88.2	-40.5	Peak	Horizontal
*	9899.5	37.1	13.0	50.1	88.2	-38.1	Peak	Horizontal
	11276.5	37.6	13.2	50.8	74.0	-23.2	Peak	Horizontal
	8301.5	37.4	8.7	46.1	74.0	-27.9	Peak	Vertical
*	8760.5	37.6	10.1	47.7	88.2	-40.5	Peak	Vertical
*	9746.5	36.7	12.9	49.6	88.2	-38.6	Peak	Vertical
	11259.5	37.4	13.3	50.7	74.0	-23.3	Peak	Vertical

Note 1: “\*\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-03-03 ~ 2024-03-05
Test Mode	802.11be-EHT160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	8845.5	37.4	10.3	47.7	88.2	-40.5	Peak	Horizontal
	9491.5	38.3	12.2	50.5	74.0	-23.5	Peak	Horizontal
*	9984.5	37.2	13.1	50.3	88.2	-37.9	Peak	Horizontal
	11480.5	37.2	13.6	50.8	74.0	-23.2	Peak	Horizontal
	8463.0	38.5	9.3	47.8	74.0	-26.2	Peak	Vertical
*	8862.5	37.2	10.3	47.5	88.2	-40.7	Peak	Vertical
*	9797.5	36.5	13.2	49.7	88.2	-38.5	Peak	Vertical
	11140.5	36.5	13.7	50.2	74.0	-23.8	Peak	Vertical

Note 1: “\*\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-03-03 ~ 2024-03-05
Test Mode	802.11be-EHT320	Test Channel	31
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8497.0	37.7	9.1	46.8	74.0	-27.2	Peak	Horizontal
*	8769.0	37.3	10.2	47.5	88.2	-40.7	Peak	Horizontal
*	9653.0	37.9	12.7	50.6	88.2	-37.6	Peak	Horizontal
	10877.0	37.0	13.9	50.9	74.0	-23.1	Peak	Horizontal
	8148.5	36.9	9.3	46.2	74.0	-27.8	Peak	Vertical
*	8735.0	37.8	10.1	47.9	88.2	-40.3	Peak	Vertical
*	9840.0	37.7	13.0	50.7	88.2	-37.5	Peak	Vertical
	10919.5	36.9	14.0	50.9	74.0	-23.1	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2024-03-03 ~ 2024-03-05
Test Mode	802.11be-EHT320	Test Channel	63
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8378.0	37.6	8.9	46.5	74.0	-27.5	Peak	Horizontal
*	8684.0	37.7	9.9	47.6	88.2	-40.6	Peak	Horizontal
*	9755.0	37.0	12.9	49.9	88.2	-38.3	Peak	Horizontal
	10792.0	36.6	14.3	50.9	74.0	-23.1	Peak	Horizontal
	8148.5	38.3	9.3	47.6	74.0	-26.4	Peak	Vertical
*	8726.5	37.9	10.1	48.0	88.2	-40.2	Peak	Vertical
*	9755.0	37.2	12.9	50.1	88.2	-38.1	Peak	Vertical
	11021.5	36.6	14.1	50.7	74.0	-23.3	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**ANT312 – Filter 1#:**

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE20	Test Channel	33
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	9364.0	35.4	12.3	47.7	74.0	-26.3	Peak	Horizontal
*	9661.5	36.5	12.7	49.2	88.2	-39.0	Peak	Horizontal
	12228.5	38.1	12.5	50.6	74.0	-23.4	Peak	Horizontal
*	13631.0	36.3	14.1	50.4	88.2	-37.8	Peak	Horizontal
*	9950.5	34.1	12.8	46.9	88.2	-41.3	Peak	Vertical
	11395.5	35.4	13.5	48.9	74.0	-25.1	Peak	Vertical
	12228.5	46.8	12.5	59.3	74.0	-14.7	Peak	Vertical
	12228.5	37.8	12.5	50.3	54.0	-3.7	Average	Vertical
*	12900.0	35.4	12.7	48.1	88.2	-40.1	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE20	Test Channel	61
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	9466.0	35.0	12.0	47.0	74.0	-27.0	Peak	Horizontal
*	10282.0	36.0	13.5	49.5	88.2	-38.7	Peak	Horizontal
	10928.0	35.8	14.1	49.9	74.0	-24.1	Peak	Horizontal
*	13189.0	36.0	12.9	48.9	88.2	-39.3	Peak	Horizontal
*	8871.0	36.6	10.4	47.0	88.2	-41.2	Peak	Vertical
	9381.0	34.9	12.3	47.2	74.0	-26.8	Peak	Vertical
*	10273.5	35.8	13.5	49.3	88.2	-38.9	Peak	Vertical
	11446.5	36.2	13.6	49.8	74.0	-24.2	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	8684.0	35.8	9.9	45.7	88.2	-42.5	Peak	Horizontal
	9049.5	36.1	10.5	46.6	74.0	-27.4	Peak	Horizontal
*	10248.0	35.1	13.4	48.5	88.2	-39.7	Peak	Horizontal
	11404.0	35.1	13.5	48.6	74.0	-25.4	Peak	Horizontal
	9134.5	36.1	11.1	47.2	74.0	-26.8	Peak	Vertical
*	9823.0	36.0	13.2	49.2	88.2	-39.0	Peak	Vertical
	11523.0	35.6	13.6	49.2	74.0	-24.8	Peak	Vertical
*	12832.0	39.4	13.0	52.4	88.2	-35.8	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	9126.0	35.1	11.1	46.2	74.0	-27.8	Peak	Horizontal
*	10494.5	35.5	14.0	49.5	88.2	-38.7	Peak	Horizontal
	11489.0	35.2	13.8	49.0	74.0	-25.0	Peak	Horizontal
*	13070.0	36.6	12.6	49.2	88.2	-39.0	Peak	Horizontal
	9168.5	36.1	11.3	47.4	74.0	-26.6	Peak	Vertical
*	10197.0	35.4	13.4	48.8	88.2	-39.4	Peak	Vertical
	11489.0	35.5	13.8	49.3	74.0	-24.7	Peak	Vertical
*	13070.0	42.2	12.6	54.8	88.2	-33.4	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE20	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8786.0	36.0	10.3	46.3	88.2	-41.9	Peak	Horizontal
*	9491.5	34.6	12.2	46.8	74.0	-27.2	Peak	Horizontal
	10256.5	34.6	13.3	47.9	88.2	-40.3	Peak	Horizontal
*	11752.5	36.0	12.4	48.4	74.0	-25.6	Peak	Horizontal
	8675.5	35.7	9.8	45.5	88.2	-42.7	Peak	Vertical
*	9466.0	35.0	12.0	47.0	74.0	-27.0	Peak	Vertical
	9899.5	35.5	13.0	48.5	88.2	-39.7	Peak	Vertical
*	11047.0	34.9	14.2	49.1	74.0	-24.9	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	9024.0	35.8	10.4	46.2	74.0	-27.8	Peak	Horizontal
*	9857.0	35.8	12.9	48.7	88.2	-39.5	Peak	Horizontal
	10996.0	35.6	14.4	50.0	74.0	-24.0	Peak	Horizontal
*	12857.5	36.4	12.6	49.0	88.2	-39.2	Peak	Horizontal
*	8777.5	35.3	10.2	45.5	88.2	-42.7	Peak	Vertical
	9092.0	35.4	10.4	45.8	74.0	-28.2	Peak	Vertical
*	9857.0	35.8	12.9	48.7	88.2	-39.5	Peak	Vertical
	10996.0	35.6	14.4	50.0	74.0	-24.0	Peak	Vertical

Note 1: “\*\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE40	Test Channel	35
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	9423.5	34.0	12.3	46.3	74.0	-27.7	Peak	Horizontal
*	9814.5	35.5	13.2	48.7	88.2	-39.5	Peak	Horizontal
	11319.0	35.7	13.2	48.9	74.0	-25.1	Peak	Horizontal
*	13155.0	35.0	12.7	47.7	88.2	-40.5	Peak	Horizontal
*	10384.0	34.5	13.7	48.2	88.2	-40.0	Peak	Vertical
	11387.0	36.3	13.5	49.8	74.0	-24.2	Peak	Vertical
	12254.0	44.8	12.4	57.2	74.0	-16.8	Peak	Vertical
	12254.0	34.1	12.4	46.5	54.0	-7.5	Average	Vertical
*	12968.0	34.9	12.8	47.7	88.2	-40.5	Peak	Vertical

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE40	Test Channel	59
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	8624.5	36.1	9.6	45.7	88.2	-42.5	Peak	Horizontal
	9117.5	35.1	10.8	45.9	74.0	-28.1	Peak	Horizontal
*	9933.5	34.8	13.1	47.9	88.2	-40.3	Peak	Horizontal
	11531.5	36.7	13.5	50.2	74.0	-23.8	Peak	Horizontal
	8165.5	35.7	9.2	44.9	74.0	-29.1	Peak	Vertical
*	8658.5	36.1	9.8	45.9	88.2	-42.3	Peak	Vertical
*	9891.0	35.5	13.1	48.6	88.2	-39.6	Peak	Vertical
	11497.5	34.5	13.7	48.2	74.0	-25.8	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8233.5	35.9	8.8	44.7	74.0	-29.3	Peak	Horizontal
*	8777.5	35.4	10.2	45.6	88.2	-42.6	Peak	Horizontal
*	9687.0	36.7	12.8	49.5	88.2	-38.7	Peak	Horizontal
	12016.0	35.9	12.4	48.3	74.0	-25.7	Peak	Horizontal
	8242.0	35.3	8.8	44.1	74.0	-29.9	Peak	Vertical
*	10341.5	34.9	13.6	48.5	88.2	-39.7	Peak	Vertical
	11514.5	35.2	13.6	48.8	74.0	-25.2	Peak	Vertical
*	12832.0	37.7	13.0	50.7	88.2	-37.5	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8352.5	35.9	8.7	44.6	74.0	-29.4	Peak	Horizontal
*	8845.5	35.5	10.3	45.8	88.2	-42.4	Peak	Horizontal
*	9772.0	36.2	12.9	49.1	88.2	-39.1	Peak	Horizontal
	11523.0	35.3	13.6	48.9	74.0	-25.1	Peak	Horizontal
	8148.5	35.0	9.3	44.3	74.0	-29.7	Peak	Vertical
*	8692.5	36.3	10.0	46.3	88.2	-41.9	Peak	Vertical
*	10341.5	35.2	13.6	48.8	88.2	-39.4	Peak	Vertical
	11123.5	36.4	13.5	49.9	74.0	-24.1	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8335.5	36.5	8.6	45.1	74.0	-28.9	Peak	Horizontal
*	8752.0	36.4	10.0	46.4	88.2	-41.8	Peak	Horizontal
*	10239.5	34.6	13.4	48.0	88.2	-40.2	Peak	Horizontal
	11540.0	35.9	13.5	49.4	74.0	-24.6	Peak	Horizontal
	8140.0	35.3	9.2	44.5	74.0	-29.5	Peak	Vertical
*	8752.0	36.1	10.0	46.1	88.2	-42.1	Peak	Vertical
*	10545.5	35.2	14.0	49.2	88.2	-39.0	Peak	Vertical
	11531.5	35.8	13.5	49.3	74.0	-24.7	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8276.0	35.7	8.5	44.2	74.0	-29.8	Peak	Horizontal
*	9899.5	36.1	13.0	49.1	88.2	-39.1	Peak	Horizontal
	11480.5	35.0	13.6	48.6	74.0	-25.4	Peak	Horizontal
*	13886.0	35.2	14.7	49.9	88.2	-38.3	Peak	Horizontal
	8369.5	34.1	8.9	43.0	74.0	-31.0	Peak	Vertical
*	8786.0	34.9	10.3	45.2	88.2	-43.0	Peak	Vertical
*	9797.5	35.1	13.2	48.3	88.2	-39.9	Peak	Vertical
	11548.5	35.4	13.5	48.9	74.0	-25.1	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE80	Test Channel	39
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8199.5	36.3	8.9	45.2	74.0	-28.8	Peak	Horizontal
*	8718.0	37.0	10.1	47.1	88.2	-41.1	Peak	Horizontal
*	10248.0	34.7	13.4	48.1	88.2	-40.1	Peak	Horizontal
	10885.5	35.0	14.0	49.0	74.0	-25.0	Peak	Horizontal
*	10214.0	34.9	13.2	48.1	88.2	-40.1	Peak	Vertical
	11497.5	35.5	13.7	49.2	74.0	-24.8	Peak	Vertical
	12279.5	43.3	12.4	55.7	74.0	-18.3	Peak	Vertical
	12279.5	32.4	12.4	44.8	54.0	-9.2	Average	Vertical
*	12951.0	35.1	12.7	47.8	88.2	-40.4	Peak	Vertical

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8369.5	36.3	8.9	45.2	74.0	-28.8	Peak	Horizontal
*	8718.0	35.5	10.1	45.6	88.2	-42.6	Peak	Horizontal
*	10579.5	34.9	14.1	49.0	88.2	-39.2	Peak	Horizontal
	10996.0	35.0	14.4	49.4	74.0	-24.6	Peak	Horizontal
	8114.5	36.9	9.1	46.0	74.0	-28.0	Peak	Vertical
*	8769.0	35.9	10.2	46.1	88.2	-42.1	Peak	Vertical
*	10095.0	34.8	13.2	48.0	88.2	-40.2	Peak	Vertical
	12067.0	36.2	12.4	48.6	74.0	-25.4	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8310.0	35.4	8.7	44.1	74.0	-29.9	Peak	Horizontal
*	8811.5	36.2	10.3	46.5	88.2	-41.7	Peak	Horizontal
*	9831.5	35.0	13.1	48.1	88.2	-40.1	Peak	Horizontal
	11021.5	35.5	14.1	49.6	74.0	-24.4	Peak	Horizontal
*	8828.5	35.6	10.3	45.9	88.2	-42.3	Peak	Vertical
	9168.5	34.4	11.3	45.7	74.0	-28.3	Peak	Vertical
*	9857.0	35.1	12.9	48.0	88.2	-40.2	Peak	Vertical
	11523.0	34.9	13.6	48.5	74.0	-25.5	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8165.5	35.0	9.2	44.2	74.0	-29.8	Peak	Horizontal
*	8624.5	35.9	9.6	45.5	88.2	-42.7	Peak	Horizontal
*	9891.0	35.4	13.1	48.5	88.2	-39.7	Peak	Horizontal
	11489.0	35.5	13.8	49.3	74.0	-24.7	Peak	Horizontal
	8454.5	35.6	9.2	44.8	74.0	-29.2	Peak	Vertical
*	8794.5	35.7	10.3	46.0	88.2	-42.2	Peak	Vertical
*	9738.0	35.1	13.0	48.1	88.2	-40.1	Peak	Vertical
	11081.0	35.3	14.0	49.3	74.0	-24.7	Peak	Vertical

Note 1: “\*\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8097.5	36.1	9.4	45.5	74.0	-28.5	Peak	Horizontal
*	8811.5	35.2	10.3	45.5	88.2	-42.7	Peak	Horizontal
*	10265.0	35.0	13.5	48.5	88.2	-39.7	Peak	Horizontal
	10953.5	36.1	14.1	50.2	74.0	-23.8	Peak	Horizontal
	8293.0	35.7	8.8	44.5	74.0	-29.5	Peak	Vertical
*	8701.0	37.3	10.0	47.3	88.2	-40.9	Peak	Vertical
*	9772.0	35.3	12.9	48.2	88.2	-40.0	Peak	Vertical
	10987.5	34.7	14.3	49.0	74.0	-25.0	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8293.0	36.9	8.8	45.7	74.0	-28.3	Peak	Horizontal
*	8701.0	34.8	10.0	44.8	88.2	-43.4	Peak	Horizontal
*	10571.0	36.4	14.1	50.5	88.2	-37.7	Peak	Horizontal
	11480.5	35.4	13.6	49.0	74.0	-25.0	Peak	Horizontal
	8446.0	34.9	9.0	43.9	74.0	-30.1	Peak	Vertical
*	8692.5	35.5	10.0	45.5	88.2	-42.7	Peak	Vertical
*	9891.0	34.7	13.1	47.8	88.2	-40.4	Peak	Vertical
	11030.0	35.0	14.0	49.0	74.0	-25.0	Peak	Vertical

Note 1: “\*\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8174.0	36.1	9.0	45.1	74.0	-28.9	Peak	Horizontal
*	8828.5	36.3	10.3	46.6	88.2	-41.6	Peak	Horizontal
*	10307.5	35.1	13.3	48.4	88.2	-39.8	Peak	Horizontal
	11769.5	36.6	12.5	49.1	74.0	-24.9	Peak	Horizontal
*	8735.0	36.0	10.1	46.1	88.2	-42.1	Peak	Vertical
	9066.5	34.9	10.6	45.5	74.0	-28.5	Peak	Vertical
*	10384.0	34.6	13.7	48.3	88.2	-39.9	Peak	Vertical
	11072.5	35.3	14.0	49.3	74.0	-24.7	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8497.0	35.9	9.1	45.0	74.0	-29.0	Peak	Horizontal
*	8786.0	35.1	10.3	45.4	88.2	-42.8	Peak	Horizontal
*	10086.5	35.2	13.2	48.4	88.2	-39.8	Peak	Horizontal
	10826.0	35.8	14.0	49.8	74.0	-24.2	Peak	Horizontal
*	8820.0	35.9	10.3	46.2	88.2	-42.0	Peak	Vertical
	9168.5	34.2	11.3	45.5	74.0	-28.5	Peak	Vertical
*	10375.5	35.3	13.7	49.0	88.2	-39.2	Peak	Vertical
	11438.0	35.5	13.7	49.2	74.0	-24.8	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8148.5	35.8	9.3	45.1	74.0	-28.9	Peak	Horizontal
*	8667.0	36.1	9.7	45.8	88.2	-42.4	Peak	Horizontal
*	9814.5	35.8	13.2	49.0	88.2	-39.2	Peak	Horizontal
	10945.0	36.3	14.1	50.4	74.0	-23.6	Peak	Horizontal
	8454.5	35.2	9.2	44.4	74.0	-29.6	Peak	Vertical
*	8760.5	36.5	10.1	46.6	88.2	-41.6	Peak	Vertical
*	9908.0	34.7	13.0	47.7	88.2	-40.5	Peak	Vertical
	11429.5	35.7	13.6	49.3	74.0	-24.7	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT20	Test Channel	33
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	8726.5	36.1	10.1	46.2	88.2	-42.0	Peak	Horizontal
	9423.5	35.0	12.3	47.3	74.0	-26.7	Peak	Horizontal
*	10307.5	34.9	13.3	48.2	88.2	-40.0	Peak	Horizontal
	11531.5	35.6	13.5	49.1	74.0	-24.9	Peak	Horizontal
*	9806.0	35.0	13.2	48.2	88.2	-40.0	Peak	Vertical
	11072.5	35.2	14.0	49.2	74.0	-24.8	Peak	Vertical
	12228.5	46.1	12.5	58.6	74.0	-15.4	Peak	Vertical
	12228.5	37.5	12.5	50.0	54.0	-4.0	Average	Vertical
*	12951.0	35.0	12.7	47.7	88.2	-40.5	Peak	Vertical

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT20	Test Channel	61
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	8871.0	35.6	10.4	46.0	88.2	-42.2	Peak	Horizontal
	9406.5	33.5	12.2	45.7	74.0	-28.3	Peak	Horizontal
*	10197.0	35.2	13.4	48.6	88.2	-39.6	Peak	Horizontal
	11531.5	35.5	13.5	49.0	74.0	-25.0	Peak	Horizontal
*	8828.5	36.7	10.3	47.0	88.2	-41.2	Peak	Vertical
	9347.0	34.1	12.2	46.3	74.0	-27.7	Peak	Vertical
*	9695.5	35.9	12.8	48.7	88.2	-39.5	Peak	Vertical
	10919.5	35.5	14.0	49.5	74.0	-24.5	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8165.5	34.8	9.2	44.0	74.0	-30.0	Peak	Horizontal
*	8684.0	35.7	9.9	45.6	88.2	-42.6	Peak	Horizontal
*	10205.5	35.0	13.3	48.3	88.2	-39.9	Peak	Horizontal
	11081.0	35.0	14.0	49.0	74.0	-25.0	Peak	Horizontal
	9457.5	34.2	12.1	46.3	74.0	-27.7	Peak	Vertical
*	10188.5	34.4	13.5	47.9	88.2	-40.3	Peak	Vertical
	11013.0	35.3	14.3	49.6	74.0	-24.4	Peak	Vertical
*	12832.0	40.1	13.0	53.1	88.2	-35.1	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	8803.0	36.0	10.3	46.3	88.2	-41.9	Peak	Horizontal
	9406.5	34.4	12.2	46.6	74.0	-27.4	Peak	Horizontal
*	10341.5	34.2	13.6	47.8	88.2	-40.4	Peak	Horizontal
	11540.0	35.4	13.5	48.9	74.0	-25.1	Peak	Horizontal
	9389.5	34.5	12.2	46.7	74.0	-27.3	Peak	Vertical
*	10248.0	34.8	13.4	48.2	88.2	-40.0	Peak	Vertical
	11523.0	34.7	13.6	48.3	74.0	-25.7	Peak	Vertical
*	13070.0	42.0	12.6	54.6	88.2	-33.6	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT20	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	8837.0	35.7	10.3	46.0	88.2	-42.2	Peak	Horizontal
	9423.5	34.6	12.3	46.9	74.0	-27.1	Peak	Horizontal
*	10418.0	35.2	13.5	48.7	88.2	-39.5	Peak	Horizontal
	11514.5	35.6	13.6	49.2	74.0	-24.8	Peak	Horizontal
*	9789.0	34.3	13.1	47.4	88.2	-40.8	Peak	Vertical
	11497.5	36.4	13.7	50.1	74.0	-23.9	Peak	Vertical
*	12891.5	35.3	12.7	48.0	88.2	-40.2	Peak	Vertical
	13384.5	38.4	13.4	51.8	74.0	-22.2	Peak	Vertical
	13384.5	28.5	13.4	41.9	54.0	-12.1	Average	Vertical

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	8854.0	35.7	10.3	46.0	88.2	-42.2	Peak	Horizontal
	9381.0	34.0	12.3	46.3	74.0	-27.7	Peak	Horizontal
*	9865.5	35.2	13.0	48.2	88.2	-40.0	Peak	Horizontal
	11004.5	34.0	14.3	48.3	74.0	-25.7	Peak	Horizontal
	9381.0	34.3	12.3	46.6	74.0	-27.4	Peak	Vertical
*	10477.5	34.9	14.0	48.9	88.2	-39.3	Peak	Vertical
	11557.0	35.7	13.4	49.1	74.0	-24.9	Peak	Vertical
*	13716.0	39.1	14.1	53.2	88.2	-35.0	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT40	Test Channel	35
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9440.5	33.4	12.2	45.6	74.0	-28.4	Peak	Horizontal
	9882.5	34.4	13.2	47.6	88.2	-40.6	Peak	Horizontal
	11030.0	35.1	14.0	49.1	74.0	-24.9	Peak	Horizontal
*	13019.0	35.0	12.8	47.8	88.2	-40.4	Peak	Horizontal
*	9925.0	35.6	13.0	48.6	88.2	-39.6	Peak	Vertical
	11480.5	36.4	13.6	50.0	74.0	-24.0	Peak	Vertical
	12254.0	44.9	12.4	57.3	74.0	-16.7	Peak	Vertical
	12254.0	34.2	12.4	46.6	54.0	-7.4	Average	Vertical
*	13010.5	35.3	12.7	48.0	88.2	-40.2	Peak	Vertical

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT40	Test Channel	59
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9372.5	35.7	12.4	48.1	74.0	-25.9	Peak	Horizontal
	10027.0	35.5	12.9	48.4	88.2	-39.8	Peak	Horizontal
*	11463.5	35.8	13.5	49.3	74.0	-24.7	Peak	Horizontal
	14090.0	35.7	15.3	51.0	88.2	-37.2	Peak	Horizontal
	9381.0	34.6	12.3	46.9	74.0	-27.1	Peak	Vertical
*	9848.5	36.6	12.9	49.5	88.2	-38.7	Peak	Vertical
	11115.0	35.7	13.5	49.2	74.0	-24.8	Peak	Vertical
*	12806.5	36.1	12.6	48.7	88.2	-39.5	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	8692.5	35.8	10.0	45.8	88.2	-42.4	Peak	Horizontal
	9355.5	36.0	12.2	48.2	74.0	-25.8	Peak	Horizontal
*	10103.5	35.2	13.1	48.3	88.2	-39.9	Peak	Horizontal
	11472.0	34.9	13.4	48.3	74.0	-25.7	Peak	Horizontal
	9423.5	33.8	12.3	46.1	74.0	-27.9	Peak	Vertical
*	10477.5	35.1	14.0	49.1	88.2	-39.1	Peak	Vertical
	11446.5	35.6	13.6	49.2	74.0	-24.8	Peak	Vertical
*	12806.5	39.3	12.6	51.9	88.2	-36.3	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	9389.5	33.8	12.2	46.0	74.0	-28.0	Peak	Horizontal
*	9517.0	34.9	12.1	47.0	88.2	-41.2	Peak	Horizontal
*	10171.5	35.1	13.3	48.4	88.2	-39.8	Peak	Horizontal
	11489.0	35.2	13.8	49.0	74.0	-25.0	Peak	Horizontal
	9389.5	34.8	12.2	47.0	74.0	-27.0	Peak	Vertical
*	10528.5	34.6	13.9	48.5	88.2	-39.7	Peak	Vertical
	11557.0	35.2	13.4	48.6	74.0	-25.4	Peak	Vertical
*	13129.5	39.6	12.8	52.4	88.2	-35.8	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	9406.5	34.3	12.2	46.5	74.0	-27.5	Peak	Horizontal
*	10205.5	34.8	13.3	48.1	88.2	-40.1	Peak	Horizontal
	11565.5	35.5	13.3	48.8	74.0	-25.2	Peak	Horizontal
*	14115.5	35.5	15.1	50.6	88.2	-37.6	Peak	Horizontal
	9423.5	33.8	12.3	46.1	74.0	-27.9	Peak	Vertical
*	10409.5	35.1	13.6	48.7	88.2	-39.5	Peak	Vertical
	11506.0	36.0	13.6	49.6	74.0	-24.4	Peak	Vertical
*	14336.5	35.6	15.7	51.3	88.2	-36.9	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8327.0	37.5	8.7	46.2	74.0	-27.8	Peak	Horizontal
*	8735.0	39.6	10.1	49.7	88.2	-38.5	Peak	Horizontal
*	9738.0	37.1	13.0	50.1	88.2	-38.1	Peak	Horizontal
	11081.0	36.9	14.0	50.9	74.0	-23.1	Peak	Horizontal
	8216.5	37.8	8.8	46.6	74.0	-27.4	Peak	Vertical
*	8650.0	38.4	9.7	48.1	88.2	-40.1	Peak	Vertical
*	9840.0	36.7	13.0	49.7	88.2	-38.5	Peak	Vertical
	11064.0	36.8	13.9	50.7	74.0	-23.3	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT80	Test Channel	39
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	9423.5	33.2	12.3	45.5	74.0	-28.5	Peak	Horizontal
*	10188.5	34.5	13.5	48.0	88.2	-40.2	Peak	Horizontal
	11523.0	35.3	13.6	48.9	74.0	-25.1	Peak	Horizontal
*	13860.5	35.7	14.7	50.4	88.2	-37.8	Peak	Horizontal
	9466.0	34.8	12.0	46.8	74.0	-27.2	Peak	Vertical
*	10375.5	35.2	13.7	48.9	88.2	-39.3	Peak	Vertical
	11599.5	35.7	13.2	48.9	74.0	-25.1	Peak	Vertical
*	12968.0	35.2	12.8	48.0	88.2	-40.2	Peak	Vertical

Note 1: “\*\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	8871.0	35.6	10.4	46.0	88.2	-42.2	Peak	Horizontal
	9381.0	34.2	12.3	46.5	74.0	-27.5	Peak	Horizontal
*	9755.0	35.1	12.9	48.0	88.2	-40.2	Peak	Horizontal
	11506.0	35.4	13.6	49.0	74.0	-25.0	Peak	Horizontal
*	8726.5	35.1	10.1	45.2	88.2	-43.0	Peak	Vertical
	9381.0	33.9	12.3	46.2	74.0	-27.8	Peak	Vertical
*	9840.0	35.1	13.0	48.1	88.2	-40.1	Peak	Vertical
	12441.0	38.3	12.1	50.4	74.0	-23.6	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	8709.5	35.4	10.1	45.5	88.2	-42.7	Peak	Horizontal
	9474.5	34.7	12.1	46.8	74.0	-27.2	Peak	Horizontal
*	9984.5	34.7	13.1	47.8	88.2	-40.4	Peak	Horizontal
	11064.0	35.6	13.9	49.5	74.0	-24.5	Peak	Horizontal
*	8624.5	35.5	9.6	45.1	88.2	-43.1	Peak	Vertical
	9466.0	34.2	12.0	46.2	74.0	-27.8	Peak	Vertical
*	9874.0	35.2	13.1	48.3	88.2	-39.9	Peak	Vertical
	11523.0	34.9	13.6	48.5	74.0	-25.5	Peak	Vertical

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8055.0	36.1	9.5	45.6	74.0	-28.4	Peak	Horizontal
*	8862.5	35.7	10.3	46.0	88.2	-42.2	Peak	Horizontal
*	10579.5	35.3	14.1	49.4	88.2	-38.8	Peak	Horizontal
	11429.5	35.2	13.6	48.8	74.0	-25.2	Peak	Horizontal
	9449.0	33.6	12.2	45.8	74.0	-28.2	Peak	Vertical
*	9933.5	34.9	13.1	48.0	88.2	-40.2	Peak	Vertical
	11506.0	35.4	13.6	49.0	74.0	-25.0	Peak	Vertical
*	13027.5	35.8	12.7	48.5	88.2	-39.7	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	9415.0	36.2	12.2	48.4	74.0	-25.6	Peak	Horizontal
	11438.0	35.9	13.7	49.6	74.0	-24.4	Peak	Horizontal
*	13010.5	37.7	12.7	50.4	88.2	-37.8	Peak	Horizontal
*	14005.0	36.8	14.7	51.5	88.2	-36.7	Peak	Horizontal
*	9959.0	37.1	12.9	50.0	88.2	-38.2	Peak	Vertical
	11914.0	37.1	12.4	49.5	74.0	-24.5	Peak	Vertical
	13384.5	37.1	13.4	50.5	74.0	-23.5	Peak	Vertical
*	13852.0	36.7	14.5	51.2	88.2	-37.0	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9925.0	36.4	13.0	49.4	88.2	-38.8	Peak	Horizontal
	11038.5	36.0	14.1	50.1	74.0	-23.9	Peak	Horizontal
	13333.5	37.0	13.6	50.6	74.0	-23.4	Peak	Horizontal
*	13818.0	37.7	14.5	52.2	88.2	-36.0	Peak	Horizontal
*	10350.0	35.2	13.6	48.8	88.2	-39.4	Peak	Vertical
	11149.0	35.7	13.8	49.5	74.0	-24.5	Peak	Vertical
	13367.5	35.7	13.4	49.1	74.0	-24.9	Peak	Vertical
*	13750.0	37.1	14.1	51.2	88.2	-37.0	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9712.5	36.1	12.8	48.9	88.2	-39.3	Peak	Horizontal
	12126.5	36.9	12.6	49.5	74.0	-24.5	Peak	Horizontal
	13333.5	35.8	13.6	49.4	74.0	-24.6	Peak	Horizontal
*	13631.0	36.9	14.1	51.0	88.2	-37.2	Peak	Horizontal
*	8794.5	36.6	10.3	46.9	88.2	-41.3	Peak	Vertical
	9347.0	35.9	12.2	48.1	74.0	-25.9	Peak	Vertical
*	9984.5	35.2	13.1	48.3	88.2	-39.9	Peak	Vertical
	12330.5	38.6	12.3	50.9	74.0	-23.1	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	9381.0	35.4	12.3	47.7	74.0	-26.3	Peak	Horizontal
*	9959.0	35.6	12.9	48.5	88.2	-39.7	Peak	Horizontal
	11064.0	35.8	13.9	49.7	74.0	-24.3	Peak	Horizontal
*	14243.0	36.0	15.7	51.7	88.2	-36.5	Peak	Horizontal
	9423.5	35.5	12.3	47.8	74.0	-26.2	Peak	Vertical
*	9925.0	35.8	13.0	48.8	88.2	-39.4	Peak	Vertical
	11021.5	35.6	14.1	49.7	74.0	-24.3	Peak	Vertical
*	14277.0	36.5	15.7	52.2	88.2	-36.0	Peak	Vertical

Note 1: “\*\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9789.0	36.1	13.1	49.2	88.2	-39.0	Peak	Horizontal
	11412.5	36.0	13.5	49.5	74.0	-24.5	Peak	Horizontal
	11948.0	36.2	12.3	48.5	74.0	-25.5	Peak	Horizontal
*	13078.5	34.7	12.6	47.3	88.2	-40.9	Peak	Horizontal
*	9823.0	35.1	13.2	48.3	88.2	-39.9	Peak	Vertical
	11514.5	34.8	13.6	48.4	74.0	-25.6	Peak	Vertical
	12050.0	36.2	12.5	48.7	74.0	-25.3	Peak	Vertical
*	13512.0	37.3	14.0	51.3	88.2	-36.9	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT320	Test Channel	63
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	9398.0	35.2	12.2	47.4	74.0	-26.6	Peak	Horizontal
*	10256.5	35.9	13.3	49.2	88.2	-39.0	Peak	Horizontal
	12058.5	36.4	12.5	48.9	74.0	-25.1	Peak	Horizontal
*	14090.0	36.4	15.3	51.7	88.2	-36.5	Peak	Horizontal
	9109.0	35.1	10.5	45.6	74.0	-28.4	Peak	Vertical
*	10018.5	34.9	12.9	47.8	88.2	-40.4	Peak	Vertical
	11574.0	35.4	13.2	48.6	74.0	-25.4	Peak	Vertical
*	13886.0	34.8	14.7	49.5	88.2	-38.7	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**ANT312 – Filter 2#:**

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8242.0	35.2	8.8	44.0	74.0	-30.0	Peak	Horizontal
*	8837.0	36.2	10.3	46.5	88.2	-41.7	Peak	Horizontal
*	10078.0	34.7	13.2	47.9	88.2	-40.3	Peak	Horizontal
	11072.5	34.7	14.0	48.7	74.0	-25.3	Peak	Horizontal
	9126.0	35.6	11.1	46.7	74.0	-27.3	Peak	Vertical
*	9908.0	35.0	13.0	48.0	88.2	-40.2	Peak	Vertical
	11914.0	36.7	12.4	49.1	74.0	-24.9	Peak	Vertical
*	14158.0	35.7	15.3	51.0	88.2	-37.2	Peak	Vertical

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	9075.0	35.8	10.6	46.4	74.0	-27.6	Peak	Horizontal
*	10035.5	35.8	13.0	48.8	88.2	-39.4	Peak	Horizontal
	11591.0	35.1	13.2	48.3	74.0	-25.7	Peak	Horizontal
*	14124.0	36.5	15.2	51.7	88.2	-36.5	Peak	Horizontal
*	8709.5	36.7	10.1	46.8	88.2	-41.4	Peak	Vertical
	9109.0	35.7	10.5	46.2	74.0	-27.8	Peak	Vertical
*	10341.5	34.8	13.6	48.4	88.2	-39.8	Peak	Vertical
	11412.5	35.9	13.5	49.4	74.0	-24.6	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	9143.0	35.3	11.1	46.4	74.0	-27.6	Peak	Horizontal
*	10069.5	35.6	13.0	48.6	88.2	-39.6	Peak	Horizontal
	11463.5	35.4	13.5	48.9	74.0	-25.1	Peak	Horizontal
*	12832.0	38.2	13.0	51.2	88.2	-37.0	Peak	Horizontal
	9389.5	36.0	12.2	48.2	74.0	-25.8	Peak	Vertical
*	10375.5	34.3	13.7	48.0	88.2	-40.2	Peak	Vertical
	11761.0	36.1	12.5	48.6	74.0	-25.4	Peak	Vertical
*	12823.5	42.7	12.9	55.6	88.2	-32.6	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8174.0	34.2	9.0	43.2	74.0	-30.8	Peak	Horizontal
*	8675.5	35.4	9.8	45.2	88.2	-43.0	Peak	Horizontal
*	9925.0	35.7	13.0	48.7	88.2	-39.5	Peak	Horizontal
	12041.5	36.4	12.5	48.9	74.0	-25.1	Peak	Horizontal
*	8692.5	36.1	10.0	46.1	88.2	-42.1	Peak	Vertical
	9423.5	33.0	12.3	45.3	74.0	-28.7	Peak	Vertical
*	9789.0	35.2	13.1	48.3	88.2	-39.9	Peak	Vertical
	11038.5	35.0	14.1	49.1	74.0	-24.9	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8182.5	35.8	8.9	44.7	74.0	-29.3	Peak	Horizontal
*	8769.0	35.6	10.2	45.8	88.2	-42.4	Peak	Horizontal
*	9865.5	35.2	13.0	48.2	88.2	-40.0	Peak	Horizontal
	12305.0	36.6	12.2	48.8	74.0	-25.2	Peak	Horizontal
	8420.5	35.3	9.0	44.3	74.0	-29.7	Peak	Vertical
*	8811.5	36.1	10.3	46.4	88.2	-41.8	Peak	Vertical
*	10256.5	34.7	13.3	48.0	88.2	-40.2	Peak	Vertical
	11514.5	35.3	13.6	48.9	74.0	-25.1	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	9491.5	34.3	12.2	46.5	74.0	-27.5	Peak	Horizontal
*	10477.5	34.6	14.0	48.6	88.2	-39.6	Peak	Horizontal
	11038.5	35.3	14.1	49.4	74.0	-24.6	Peak	Horizontal
*	12823.5	36.0	12.9	48.9	88.2	-39.3	Peak	Horizontal
	9381.0	35.6	12.3	47.9	74.0	-26.1	Peak	Vertical
*	10324.5	34.3	13.7	48.0	88.2	-40.2	Peak	Vertical
	11412.5	36.0	13.5	49.5	74.0	-24.5	Peak	Vertical
*	12806.5	39.6	12.6	52.2	88.2	-36.0	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8208.0	36.0	8.9	44.9	74.0	-29.1	Peak	Horizontal
*	8633.0	35.5	9.6	45.1	88.2	-43.1	Peak	Horizontal
*	9772.0	32.8	12.9	45.7	88.2	-42.5	Peak	Horizontal
	11081.0	35.2	14.0	49.2	74.0	-24.8	Peak	Horizontal
	8191.0	36.2	8.8	45.0	74.0	-29.0	Peak	Vertical
*	8845.5	36.0	10.3	46.3	88.2	-41.9	Peak	Vertical
*	10265.0	34.8	13.5	48.3	88.2	-39.9	Peak	Vertical
	12220.0	36.5	12.6	49.1	74.0	-24.9	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8412.0	36.3	8.9	45.2	74.0	-28.8	Peak	Horizontal
*	8786.0	36.2	10.3	46.5	88.2	-41.7	Peak	Horizontal
*	9976.0	35.5	13.0	48.5	88.2	-39.7	Peak	Horizontal
	10894.0	35.3	14.0	49.3	74.0	-24.7	Peak	Horizontal
	8378.0	35.7	8.9	44.6	74.0	-29.4	Peak	Vertical
*	8743.5	36.1	10.1	46.2	88.2	-42.0	Peak	Vertical
*	10137.5	35.4	13.1	48.5	88.2	-39.7	Peak	Vertical
	11489.0	35.9	13.8	49.7	74.0	-24.3	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	8760.5	35.8	10.1	45.9	88.2	-42.3	Peak	Horizontal
	9168.5	34.8	11.3	46.1	74.0	-27.9	Peak	Horizontal
*	9789.0	34.9	13.1	48.0	88.2	-40.2	Peak	Horizontal
	11336.0	35.5	13.4	48.9	74.0	-25.1	Peak	Horizontal
*	8616.0	36.7	9.6	46.3	88.2	-41.9	Peak	Vertical
	9381.0	35.0	12.3	47.3	74.0	-26.7	Peak	Vertical
*	10180.0	34.7	13.5	48.2	88.2	-40.0	Peak	Vertical
	11302.0	35.4	13.3	48.7	74.0	-25.3	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8199.5	35.3	8.9	44.2	74.0	-29.8	Peak	Horizontal
*	8692.5	36.1	10.0	46.1	88.2	-42.1	Peak	Horizontal
*	9933.5	35.1	13.1	48.2	88.2	-40.0	Peak	Horizontal
	11047.0	34.8	14.2	49.0	74.0	-25.0	Peak	Horizontal
*	8854.0	35.5	10.3	45.8	88.2	-42.4	Peak	Vertical
	9185.5	35.4	11.3	46.7	74.0	-27.3	Peak	Vertical
*	10001.5	35.3	12.8	48.1	88.2	-40.1	Peak	Vertical
	12135.0	37.0	12.6	49.6	74.0	-24.4	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	9194.0	36.0	11.2	47.2	74.0	-26.8	Peak	Horizontal
*	10256.5	34.8	13.3	48.1	88.2	-40.1	Peak	Horizontal
	12126.5	36.0	12.6	48.6	74.0	-25.4	Peak	Horizontal
*	14591.5	37.0	16.4	53.4	88.2	-34.8	Peak	Horizontal
	8225.0	34.8	8.8	43.6	74.0	-30.4	Peak	Vertical
*	8811.5	36.6	10.3	46.9	88.2	-41.3	Peak	Vertical
*	9933.5	35.1	13.1	48.2	88.2	-40.0	Peak	Vertical
	11489.0	35.4	13.8	49.2	74.0	-24.8	Peak	Vertical

Note 1: “\*\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11ax-HE160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8174.0	35.2	9.0	44.2	74.0	-29.8	Peak	Horizontal
*	8964.5	36.3	10.6	46.9	88.2	-41.3	Peak	Horizontal
*	9823.0	34.7	13.2	47.9	88.2	-40.3	Peak	Horizontal
	11115.0	35.7	13.5	49.2	74.0	-24.8	Peak	Horizontal
	8165.5	35.8	9.2	45.0	74.0	-29.0	Peak	Vertical
*	8845.5	35.8	10.3	46.1	88.2	-42.1	Peak	Vertical
*	9755.0	35.3	12.9	48.2	88.2	-40.0	Peak	Vertical
	11761.0	36.1	12.5	48.6	74.0	-25.4	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	8675.5	35.7	9.8	45.5	88.2	-42.7	Peak	Horizontal
	9066.5	35.5	10.6	46.1	74.0	-27.9	Peak	Horizontal
*	9729.5	35.9	13.0	48.9	88.2	-39.3	Peak	Horizontal
	10987.5	34.9	14.3	49.2	74.0	-24.8	Peak	Horizontal
	9109.0	35.7	10.5	46.2	74.0	-27.8	Peak	Vertical
*	9882.5	35.6	13.2	48.8	88.2	-39.4	Peak	Vertical
	11905.5	37.2	12.3	49.5	74.0	-24.5	Peak	Vertical
*	14234.5	35.4	15.8	51.2	88.2	-37.0	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8199.5	35.8	8.9	44.7	74.0	-29.3	Peak	Horizontal
*	8794.5	37.1	10.3	47.4	88.2	-40.8	Peak	Horizontal
*	9865.5	35.1	13.0	48.1	88.2	-40.1	Peak	Horizontal
	10877.0	35.4	13.9	49.3	74.0	-24.7	Peak	Horizontal
	8284.5	35.9	8.6	44.5	74.0	-29.5	Peak	Vertical
*	8845.5	36.1	10.3	46.4	88.2	-41.8	Peak	Vertical
*	9933.5	35.4	13.1	48.5	88.2	-39.7	Peak	Vertical
	11072.5	35.4	14.0	49.4	74.0	-24.6	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8344.0	36.3	8.6	44.9	74.0	-29.1	Peak	Horizontal
*	8709.5	36.0	10.1	46.1	88.2	-42.1	Peak	Horizontal
*	9967.5	35.8	13.0	48.8	88.2	-39.4	Peak	Horizontal
	10928.0	35.3	14.1	49.4	74.0	-24.6	Peak	Horizontal
	9126.0	35.4	11.1	46.5	74.0	-27.5	Peak	Vertical
*	9882.5	35.1	13.2	48.3	88.2	-39.9	Peak	Vertical
	11489.0	35.1	13.8	48.9	74.0	-25.1	Peak	Vertical
*	12832.0	42.5	13.0	55.5	88.2	-32.7	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	8709.5	35.1	10.1	45.2	88.2	-43.0	Peak	Horizontal
	9134.5	33.7	11.1	44.8	74.0	-29.2	Peak	Horizontal
*	9882.5	34.9	13.2	48.1	88.2	-40.1	Peak	Horizontal
	11327.5	35.5	13.3	48.8	74.0	-25.2	Peak	Horizontal
	8412.0	35.9	8.9	44.8	74.0	-29.2	Peak	Vertical
*	8650.0	36.7	9.7	46.4	88.2	-41.8	Peak	Vertical
*	10435.0	34.9	13.8	48.7	88.2	-39.5	Peak	Vertical
	11948.0	37.5	12.3	49.8	74.0	-24.2	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	8709.5	35.1	10.1	45.2	88.2	-43.0	Peak	Horizontal
	9168.5	35.1	11.3	46.4	74.0	-27.6	Peak	Horizontal
*	9976.0	34.7	13.0	47.7	88.2	-40.5	Peak	Horizontal
	12067.0	36.6	12.4	49.0	74.0	-25.0	Peak	Horizontal
	8480.0	36.5	9.2	45.7	74.0	-28.3	Peak	Vertical
*	8769.0	35.2	10.2	45.4	88.2	-42.8	Peak	Vertical
*	10341.5	34.6	13.6	48.2	88.2	-40.0	Peak	Vertical
	11455.0	36.0	13.5	49.5	74.0	-24.5	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	8701.0	35.8	10.0	45.8	88.2	-42.4	Peak	Horizontal
	9117.5	36.8	10.8	47.6	74.0	-26.4	Peak	Horizontal
*	9933.5	34.9	13.1	48.0	88.2	-40.2	Peak	Horizontal
	11336.0	35.8	13.4	49.2	74.0	-24.8	Peak	Horizontal
	9100.5	35.6	10.5	46.1	74.0	-27.9	Peak	Vertical
*	9925.0	35.2	13.0	48.2	88.2	-40.0	Peak	Vertical
	11820.5	35.9	12.2	48.1	74.0	-25.9	Peak	Vertical
*	12798.0	39.1	12.6	51.7	88.2	-36.5	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9100.5	34.6	10.5	45.1	74.0	-28.9	Peak	Horizontal
	9925.0	35.1	13.0	48.1	88.2	-40.1	Peak	Horizontal
*	11633.5	36.0	12.8	48.8	74.0	-25.2	Peak	Horizontal
	14226.0	35.2	15.8	51.0	88.2	-37.2	Peak	Horizontal
	8412.0	36.0	8.9	44.9	74.0	-29.1	Peak	Vertical
*	8709.5	35.4	10.1	45.5	88.2	-42.7	Peak	Vertical
*	9899.5	36.5	13.0	49.5	88.2	-38.7	Peak	Vertical
	11676.0	35.8	12.9	48.7	74.0	-25.3	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8344.0	36.4	8.6	45.0	74.0	-29.0	Peak	Horizontal
*	8854.0	35.8	10.3	46.1	88.2	-42.1	Peak	Horizontal
*	9916.5	35.5	12.9	48.4	88.2	-39.8	Peak	Horizontal
	11693.0	36.6	12.7	49.3	74.0	-24.7	Peak	Horizontal
*	8743.5	36.1	10.1	46.2	88.2	-42.0	Peak	Vertical
	9058.0	35.3	10.6	45.9	74.0	-28.1	Peak	Vertical
*	9780.5	35.5	13.0	48.5	88.2	-39.7	Peak	Vertical
	11863.0	36.3	12.3	48.6	74.0	-25.4	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8072.0	35.8	9.2	45.0	74.0	-29.0	Peak	Horizontal
*	9814.5	35.1	13.2	48.3	88.2	-39.9	Peak	Horizontal
	11293.5	35.5	13.2	48.7	74.0	-25.3	Peak	Horizontal
*	14107.0	35.6	15.1	50.7	88.2	-37.5	Peak	Horizontal
	8318.5	36.5	8.7	45.2	74.0	-28.8	Peak	Vertical
*	8828.5	36.3	10.3	46.6	88.2	-41.6	Peak	Vertical
*	9925.0	35.3	13.0	48.3	88.2	-39.9	Peak	Vertical
	11395.5	35.2	13.5	48.7	74.0	-25.3	Peak	Vertical

Note 1: “\*\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8046.5	35.7	9.4	45.1	74.0	-28.9	Peak	Horizontal
*	8794.5	36.5	10.3	46.8	88.2	-41.4	Peak	Horizontal
*	10171.5	34.6	13.3	47.9	88.2	-40.3	Peak	Horizontal
	11412.5	35.2	13.5	48.7	74.0	-25.3	Peak	Horizontal
	8157.0	35.8	9.3	45.1	74.0	-28.9	Peak	Vertical
*	8760.5	35.7	10.1	45.8	88.2	-42.4	Peak	Vertical
*	9704.0	35.6	12.8	48.4	88.2	-39.8	Peak	Vertical
	10996.0	34.5	14.4	48.9	74.0	-25.1	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8242.0	35.3	8.8	44.1	74.0	-29.9	Peak	Horizontal
*	8777.5	36.9	10.2	47.1	88.2	-41.1	Peak	Horizontal
*	9772.0	33.4	12.9	46.3	88.2	-41.9	Peak	Horizontal
	11956.5	37.1	12.3	49.4	74.0	-24.6	Peak	Horizontal
	8403.5	36.8	8.9	45.7	74.0	-28.3	Peak	Vertical
*	8845.5	36.2	10.3	46.5	88.2	-41.7	Peak	Vertical
*	9840.0	35.3	13.0	48.3	88.2	-39.9	Peak	Vertical
	11353.0	35.1	13.2	48.3	74.0	-25.7	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	9015.5	34.2	10.4	44.6	74.0	-29.4	Peak	Horizontal
*	9831.5	35.3	13.1	48.4	88.2	-39.8	Peak	Horizontal
	11302.0	35.4	13.3	48.7	74.0	-25.3	Peak	Horizontal
*	13775.5	35.7	14.4	50.1	88.2	-38.1	Peak	Horizontal
	8174.0	36.3	9.0	45.3	74.0	-28.7	Peak	Vertical
*	8667.0	35.8	9.7	45.5	88.2	-42.7	Peak	Vertical
*	9933.5	35.2	13.1	48.3	88.2	-39.9	Peak	Vertical
	11548.5	35.3	13.5	48.8	74.0	-25.2	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT320	Test Channel	31
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8199.5	35.6	8.9	44.5	74.0	-29.5	Peak	Horizontal
*	8871.0	35.8	10.4	46.2	88.2	-42.0	Peak	Horizontal
*	9916.5	35.4	12.9	48.3	88.2	-39.9	Peak	Horizontal
	11438.0	35.3	13.7	49.0	74.0	-25.0	Peak	Horizontal
	8242.0	35.2	8.8	44.0	74.0	-30.0	Peak	Vertical
*	8684.0	36.0	9.9	45.9	88.2	-42.3	Peak	Vertical
*	9976.0	34.7	13.0	47.7	88.2	-40.5	Peak	Vertical
	10843.0	35.3	14.1	49.4	74.0	-24.6	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Ajin Fan
Test Site	WZ-AC1	Test Date	2024-02-29 ~ 2024-03-05
Test Mode	802.11be-EHT320	Test Channel	63
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	8250.5	35.3	8.7	44.0	74.0	-30.0	Peak	Horizontal
*	8692.5	35.3	10.0	45.3	88.2	-42.9	Peak	Horizontal
*	10486.0	34.8	14.2	49.0	88.2	-39.2	Peak	Horizontal
	11489.0	35.4	13.8	49.2	74.0	-24.8	Peak	Horizontal
	8131.5	35.6	9.1	44.7	74.0	-29.3	Peak	Vertical
*	8633.0	35.9	9.6	45.5	88.2	-42.7	Peak	Vertical
*	10520.0	34.4	13.9	48.3	88.2	-39.9	Peak	Vertical
	11208.5	35.3	13.3	48.6	74.0	-25.4	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**ANT348 – Filter 1#:**

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE20	Test Channel	33
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	10078.0	31.6	13.7	45.3	88.2	-42.9	Peak	Horizontal
	11438.0	30.9	17.2	48.1	74.0	-25.9	Peak	Horizontal
	11633.5	29.9	17.7	47.6	74.0	-26.4	Peak	Horizontal
*	12857.5	32.2	17.0	49.2	88.2	-39.0	Peak	Horizontal
*	10010.0	33.1	13.8	46.9	88.2	-41.3	Peak	Vertical
*	10214.0	31.4	14.3	45.7	88.2	-42.5	Peak	Vertical
	11183.0	31.3	17.0	48.3	74.0	-25.7	Peak	Vertical
	11642.0	31.2	17.9	49.1	74.0	-24.9	Peak	Vertical

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE20	Test Channel	61
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9721.0	32.0	13.5	45.5	88.2	-42.7	Peak	Horizontal
*	10120.5	31.2	14.1	45.3	88.2	-42.9	Peak	Horizontal
	10936.5	33.1	16.6	49.7	74.0	-24.3	Peak	Horizontal
	11506.0	31.4	17.4	48.8	74.0	-25.2	Peak	Horizontal
*	9814.5	31.1	13.7	44.8	88.2	-43.4	Peak	Vertical
*	10171.5	30.9	14.1	45.0	88.2	-43.2	Peak	Vertical
	10826.0	30.5	16.4	46.9	74.0	-27.1	Peak	Vertical
	11727.0	32.1	17.9	50.0	74.0	-24.0	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	10035.5	32.0	13.9	45.9	88.2	-42.3	Peak	Horizontal
*	10443.5	31.1	15.5	46.6	88.2	-41.6	Peak	Horizontal
	11514.5	31.2	17.3	48.5	74.0	-25.5	Peak	Horizontal
	12551.5	31.6	16.8	48.4	74.0	-25.6	Peak	Horizontal
*	10035.5	32.0	13.9	45.9	88.2	-42.3	Peak	Vertical
*	10299.0	31.6	14.9	46.5	88.2	-41.7	Peak	Vertical
	10911.0	31.0	16.6	47.6	74.0	-26.4	Peak	Vertical
	11531.5	31.5	17.3	48.8	74.0	-25.2	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9772.0	31.7	13.5	45.2	88.2	-43.0	Peak	Horizontal
*	10265.0	32.0	14.6	46.6	88.2	-41.6	Peak	Horizontal
	10809.0	32.8	16.5	49.3	74.0	-24.7	Peak	Horizontal
	11642.0	31.6	17.9	49.5	74.0	-24.5	Peak	Horizontal
*	9814.5	32.1	13.7	45.8	88.2	-42.4	Peak	Vertical
*	10401.0	30.8	15.1	45.9	88.2	-42.3	Peak	Vertical
	10800.5	32.5	16.5	49.0	74.0	-25.0	Peak	Vertical
	11701.5	31.4	17.5	48.9	74.0	-25.1	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE20	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	10035.5	32.8	13.9	46.7	88.2	-41.5	Peak	Horizontal
*	10350.0	31.9	15.2	47.1	88.2	-41.1	Peak	Horizontal
	11276.5	30.8	17.0	47.8	74.0	-26.2	Peak	Horizontal
	11523.0	31.4	17.2	48.6	74.0	-25.4	Peak	Horizontal
*	9942.0	32.4	13.8	46.2	88.2	-42.0	Peak	Vertical
*	10265.0	31.1	14.6	45.7	88.2	-42.5	Peak	Vertical
	10792.0	32.5	16.4	48.9	74.0	-25.1	Peak	Vertical
	11276.5	29.8	17.0	46.8	74.0	-27.2	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	10010.0	34.2	13.8	48.0	88.2	-40.2	Peak	Horizontal
*	10350.0	31.0	15.2	46.2	88.2	-42.0	Peak	Horizontal
	11463.5	29.9	17.5	47.4	74.0	-26.6	Peak	Horizontal
	12186.0	31.1	17.7	48.8	74.0	-25.2	Peak	Horizontal
*	10018.5	32.9	13.8	46.7	88.2	-41.5	Peak	Vertical
*	10307.5	30.9	14.9	45.8	88.2	-42.4	Peak	Vertical
	11667.5	31.8	17.5	49.3	74.0	-24.7	Peak	Vertical
	12143.5	31.0	17.3	48.3	74.0	-25.7	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE40	Test Channel	35
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9814.5	31.9	13.7	45.6	88.2	-42.6	Peak	Horizontal
*	10171.5	30.4	14.1	44.5	88.2	-43.7	Peak	Horizontal
	11472.0	31.3	17.5	48.8	74.0	-25.2	Peak	Horizontal
	11642.0	31.6	17.9	49.5	74.0	-24.5	Peak	Horizontal
*	9857.0	32.4	13.5	45.9	88.2	-42.3	Peak	Vertical
*	10443.5	31.0	15.5	46.5	88.2	-41.7	Peak	Vertical
	11106.5	31.1	16.7	47.8	74.0	-26.2	Peak	Vertical
	12305.0	30.8	17.6	48.4	74.0	-25.6	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE40	Test Channel	59
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	10035.5	31.3	13.9	45.2	88.2	-43.0	Peak	Horizontal
*	10214.0	31.0	14.3	45.3	88.2	-42.9	Peak	Horizontal
	10843.0	32.3	16.5	48.8	74.0	-25.2	Peak	Horizontal
	11871.5	32.0	17.3	49.3	74.0	-24.7	Peak	Horizontal
*	9772.0	30.5	13.5	44.0	88.2	-44.2	Peak	Vertical
*	10307.5	31.5	14.9	46.4	88.2	-41.8	Peak	Vertical
	11319.0	30.4	17.4	47.8	74.0	-26.2	Peak	Vertical
	11659.0	31.2	17.7	48.9	74.0	-25.1	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9823.0	32.1	13.5	45.6	88.2	-42.6	Peak	Horizontal
*	10078.0	32.0	13.7	45.7	88.2	-42.5	Peak	Horizontal
	10800.5	31.7	16.5	48.2	74.0	-25.8	Peak	Horizontal
	11344.5	31.0	17.3	48.3	74.0	-25.7	Peak	Horizontal
*	9772.0	31.6	13.5	45.1	88.2	-43.1	Peak	Vertical
*	10214.0	31.8	14.3	46.1	88.2	-42.1	Peak	Vertical
	11497.5	31.9	17.6	49.5	74.0	-24.5	Peak	Vertical
	12058.5	31.0	17.0	48.0	74.0	-26.0	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	10001.5	34.1	13.8	47.9	88.2	-40.3	Peak	Horizontal
*	10443.5	31.0	15.5	46.5	88.2	-41.7	Peak	Horizontal
	10758.0	32.6	16.0	48.6	74.0	-25.4	Peak	Horizontal
	11650.5	31.2	17.8	49.0	74.0	-25.0	Peak	Horizontal
*	10001.5	34.1	13.8	47.9	88.2	-40.3	Peak	Vertical
*	10214.0	30.6	14.3	44.9	88.2	-43.3	Peak	Vertical
	10860.0	32.6	16.4	49.0	74.0	-25.0	Peak	Vertical
	11480.5	31.7	17.6	49.3	74.0	-24.7	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9899.5	31.6	13.6	45.2	88.2	-43.0	Peak	Horizontal
*	10350.0	31.7	15.2	46.9	88.2	-41.3	Peak	Horizontal
	11599.5	31.4	17.2	48.6	74.0	-25.4	Peak	Horizontal
	11897.0	29.6	17.4	47.0	74.0	-27.0	Peak	Horizontal
*	10078.0	31.5	13.7	45.2	88.2	-43.0	Peak	Vertical
*	10401.0	31.8	15.1	46.9	88.2	-41.3	Peak	Vertical
	11072.5	30.8	16.5	47.3	74.0	-26.7	Peak	Vertical
	11506.0	31.4	17.4	48.8	74.0	-25.2	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	11183.0	33.0	17.0	50.0	74.0	-24.0	Peak	Horizontal
	11446.5	30.9	17.3	48.2	74.0	-25.8	Peak	Horizontal
*	13129.5	29.8	17.9	47.7	88.2	-40.5	Peak	Horizontal
*	14447.0	32.6	20.4	53.0	88.2	-35.2	Peak	Horizontal
*	9772.0	30.9	13.5	44.4	88.2	-43.8	Peak	Vertical
*	10452.0	32.5	15.4	47.9	88.2	-40.3	Peak	Vertical
	11183.0	33.0	17.0	50.0	74.0	-24.0	Peak	Vertical
	11565.5	31.2	17.8	49.0	74.0	-25.0	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE80	Test Channel	39
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9899.5	31.5	13.6	45.1	88.2	-43.1	Peak	Horizontal
*	10265.0	30.8	14.6	45.4	88.2	-42.8	Peak	Horizontal
	11667.5	31.5	17.5	49.0	74.0	-25.0	Peak	Horizontal
	12313.5	31.5	17.4	48.9	74.0	-25.1	Peak	Horizontal
*	10035.5	33.4	13.9	47.3	88.2	-40.9	Peak	Vertical
*	10265.0	31.2	14.6	45.8	88.2	-42.4	Peak	Vertical
	11574.0	31.5	17.7	49.2	74.0	-24.8	Peak	Vertical
	11735.5	29.2	17.7	46.9	74.0	-27.1	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9899.5	32.4	13.6	46.0	88.2	-42.2	Peak	Horizontal
*	10494.5	32.0	15.4	47.4	88.2	-40.8	Peak	Horizontal
	10817.5	32.4	16.5	48.9	74.0	-25.1	Peak	Horizontal
	11489.0	32.0	17.7	49.7	74.0	-24.3	Peak	Horizontal
*	9772.0	31.8	13.5	45.3	88.2	-42.9	Peak	Vertical
*	10171.5	31.1	14.1	45.2	88.2	-43.0	Peak	Vertical
	11183.0	30.9	17.0	47.9	74.0	-26.1	Peak	Vertical
	11735.5	30.3	17.7	48.0	74.0	-26.0	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9899.5	32.3	13.6	45.9	88.2	-42.3	Peak	Horizontal
*	10018.5	33.1	13.8	46.9	88.2	-41.3	Peak	Horizontal
	10826.0	31.5	16.4	47.9	74.0	-26.1	Peak	Horizontal
	11633.5	31.1	17.7	48.8	74.0	-25.2	Peak	Horizontal
*	10120.5	32.6	14.1	46.7	88.2	-41.5	Peak	Vertical
*	10401.0	30.8	15.1	45.9	88.2	-42.3	Peak	Vertical
	11098.0	30.6	16.8	47.4	74.0	-26.6	Peak	Vertical
	11548.5	31.9	17.7	49.6	74.0	-24.4	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9899.5	31.6	13.6	45.2	88.2	-43.0	Peak	Horizontal
*	10265.0	30.4	14.6	45.0	88.2	-43.2	Peak	Horizontal
	11225.5	30.0	16.9	46.9	74.0	-27.1	Peak	Horizontal
	11667.5	31.4	17.5	48.9	74.0	-25.1	Peak	Horizontal
*	9899.5	31.4	13.6	45.0	88.2	-43.2	Peak	Vertical
*	10265.0	31.5	14.6	46.1	88.2	-42.1	Peak	Vertical
	11735.5	30.0	17.7	47.7	74.0	-26.3	Peak	Vertical
	12364.5	33.0	16.9	49.9	74.0	-24.1	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9942.0	31.9	13.8	45.7	88.2	-42.5	Peak	Horizontal
*	10307.5	30.6	14.9	45.5	88.2	-42.7	Peak	Horizontal
	11081.0	32.7	16.7	49.4	74.0	-24.6	Peak	Horizontal
	11735.5	29.3	17.7	47.0	74.0	-27.0	Peak	Horizontal
*	9593.5	33.0	13.3	46.3	88.2	-41.9	Peak	Vertical
*	9814.5	31.9	13.7	45.6	88.2	-42.6	Peak	Vertical
	11234.0	31.1	17.0	48.1	74.0	-25.9	Peak	Vertical
	11633.5	31.2	17.7	48.9	74.0	-25.1	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	10078.0	31.4	13.7	45.1	88.2	-43.1	Peak	Horizontal
*	10443.5	31.0	15.5	46.5	88.2	-41.7	Peak	Horizontal
	11234.0	31.1	17.0	48.1	74.0	-25.9	Peak	Horizontal
	11684.5	29.7	17.3	47.0	74.0	-27.0	Peak	Horizontal
*	9814.5	31.4	13.7	45.1	88.2	-43.1	Peak	Vertical
*	10171.5	30.9	14.1	45.0	88.2	-43.2	Peak	Vertical
	11225.5	30.1	16.9	47.0	74.0	-27.0	Peak	Vertical
	11565.5	30.8	17.8	48.6	74.0	-25.4	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9993.0	31.5	13.7	45.2	88.2	-43.0	Peak	Horizontal
*	10494.5	30.6	15.4	46.0	88.2	-42.2	Peak	Horizontal
	10868.5	32.1	16.3	48.4	74.0	-25.6	Peak	Horizontal
	11327.5	30.7	17.4	48.1	74.0	-25.9	Peak	Horizontal
*	9857.0	31.0	13.5	44.5	88.2	-43.7	Peak	Vertical
*	10171.5	30.5	14.1	44.6	88.2	-43.6	Peak	Vertical
	10877.0	33.2	16.3	49.5	74.0	-24.5	Peak	Vertical
	11897.0	29.1	17.4	46.5	74.0	-27.5	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9814.5	31.6	13.7	45.3	88.2	-42.9	Peak	Horizontal
*	10384.0	32.5	15.1	47.6	88.2	-40.6	Peak	Horizontal
	11429.5	30.2	17.3	47.5	74.0	-26.5	Peak	Horizontal
	12186.0	31.1	17.7	48.8	74.0	-25.2	Peak	Horizontal
*	9772.0	30.4	13.5	43.9	88.2	-44.3	Peak	Vertical
*	10333.0	32.0	15.1	47.1	88.2	-41.1	Peak	Vertical
	11480.5	30.6	17.6	48.2	74.0	-25.8	Peak	Vertical
	11846.0	30.0	17.1	47.1	74.0	-26.9	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9942.0	33.0	13.8	46.8	88.2	-41.4	Peak	Horizontal
*	10443.5	31.4	15.5	46.9	88.2	-41.3	Peak	Horizontal
	11013.0	31.4	16.5	47.9	74.0	-26.1	Peak	Horizontal
	11327.5	31.7	17.4	49.1	74.0	-24.9	Peak	Horizontal
*	10078.0	30.8	13.7	44.5	88.2	-43.7	Peak	Vertical
*	10494.5	31.7	15.4	47.1	88.2	-41.1	Peak	Vertical
	11302.0	31.6	17.2	48.8	74.0	-25.2	Peak	Vertical
	11633.5	31.0	17.7	48.7	74.0	-25.3	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT20	Test Channel	33
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	10086.5	33.1	13.8	46.9	88.2	-41.3	Peak	Horizontal
	10749.5	31.9	16.0	47.9	74.0	-26.1	Peak	Horizontal
	11565.5	30.8	17.8	48.6	74.0	-25.4	Peak	Horizontal
*	14455.5	32.6	20.3	52.9	88.2	-35.3	Peak	Horizontal
*	9993.0	31.2	13.7	44.9	88.2	-43.3	Peak	Vertical
*	10350.0	31.5	15.2	46.7	88.2	-41.5	Peak	Vertical
	11344.5	30.2	17.3	47.5	74.0	-26.5	Peak	Vertical
	11727.0	30.4	17.9	48.3	74.0	-25.7	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT20	Test Channel	61
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9942.0	31.7	13.8	45.5	88.2	-42.7	Peak	Horizontal
*	10265.0	31.5	14.6	46.1	88.2	-42.1	Peak	Horizontal
	10885.5	32.1	16.3	48.4	74.0	-25.6	Peak	Horizontal
	11455.0	31.2	17.4	48.6	74.0	-25.4	Peak	Horizontal
*	9814.5	30.8	13.7	44.5	88.2	-43.7	Peak	Vertical
*	10171.5	31.8	14.1	45.9	88.2	-42.3	Peak	Vertical
	10962.0	31.8	16.2	48.0	74.0	-26.0	Peak	Vertical
	11633.5	28.9	17.7	46.6	74.0	-27.4	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9857.0	31.0	13.5	44.5	88.2	-43.7	Peak	Horizontal
*	10307.5	29.9	14.9	44.8	88.2	-43.4	Peak	Horizontal
	10851.5	31.7	16.5	48.2	74.0	-25.8	Peak	Horizontal
	11480.5	29.2	17.6	46.8	74.0	-27.2	Peak	Horizontal
*	9993.0	32.1	13.7	45.8	88.2	-42.4	Peak	Vertical
*	10307.5	30.3	14.9	45.2	88.2	-43.0	Peak	Vertical
	11327.5	32.1	17.4	49.5	74.0	-24.5	Peak	Vertical
	11633.5	29.5	17.7	47.2	74.0	-26.8	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	10086.5	34.4	13.8	48.2	88.2	-40.0	Peak	Horizontal
*	10350.0	31.5	15.2	46.7	88.2	-41.5	Peak	Horizontal
	10826.0	31.7	16.4	48.1	74.0	-25.9	Peak	Horizontal
	11276.5	30.3	17.0	47.3	74.0	-26.7	Peak	Horizontal
*	9993.0	31.6	13.7	45.3	88.2	-42.9	Peak	Vertical
*	10350.0	31.5	15.2	46.7	88.2	-41.5	Peak	Vertical
	10809.0	31.3	16.5	47.8	74.0	-26.2	Peak	Vertical
	11633.5	30.9	17.7	48.6	74.0	-25.4	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT20	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9942.0	32.8	13.8	46.6	88.2	-41.6	Peak	Horizontal
*	10401.0	30.7	15.1	45.8	88.2	-42.4	Peak	Horizontal
	11064.0	31.0	16.3	47.3	74.0	-26.7	Peak	Horizontal
	11242.5	30.0	17.1	47.1	74.0	-26.9	Peak	Horizontal
*	9814.5	32.5	13.7	46.2	88.2	-42.0	Peak	Vertical
*	10171.5	31.2	14.1	45.3	88.2	-42.9	Peak	Vertical
	11327.5	29.5	17.4	46.9	74.0	-27.1	Peak	Vertical
	11642.0	30.8	17.9	48.7	74.0	-25.3	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9678.5	31.8	13.5	45.3	88.2	-42.9	Peak	Horizontal
*	10120.5	30.7	14.1	44.8	88.2	-43.4	Peak	Horizontal
	10664.5	32.1	16.1	48.2	74.0	-25.8	Peak	Horizontal
	11633.5	29.6	17.7	47.3	74.0	-26.7	Peak	Horizontal
*	9857.0	32.8	13.5	46.3	88.2	-41.9	Peak	Vertical
*	10443.5	30.4	15.5	45.9	88.2	-42.3	Peak	Vertical
	11438.0	31.1	17.2	48.3	74.0	-25.7	Peak	Vertical
	11540.0	31.5	17.6	49.1	74.0	-24.9	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT40	Test Channel	35
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9857.0	32.8	13.5	46.3	88.2	-41.9	Peak	Horizontal
*	10333.0	31.9	15.1	47.0	88.2	-41.2	Peak	Horizontal
	10809.0	32.7	16.5	49.2	74.0	-24.8	Peak	Horizontal
	11616.5	31.4	17.4	48.8	74.0	-25.2	Peak	Horizontal
*	9814.5	31.6	13.7	45.3	88.2	-42.9	Peak	Vertical
*	10214.0	29.5	14.3	43.8	88.2	-44.4	Peak	Vertical
	10656.0	31.4	15.8	47.2	74.0	-26.8	Peak	Vertical
	12092.5	31.7	16.9	48.6	74.0	-25.4	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT40	Test Channel	59
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9772.0	31.5	13.5	45.0	88.2	-43.2	Peak	Horizontal
*	10120.5	30.7	14.1	44.8	88.2	-43.4	Peak	Horizontal
	11174.5	29.2	17.0	46.2	74.0	-27.8	Peak	Horizontal
	11565.5	31.4	17.8	49.2	74.0	-24.8	Peak	Horizontal
*	9993.0	31.8	13.7	45.5	88.2	-42.7	Peak	Vertical
*	10435.0	31.0	15.5	46.5	88.2	-41.7	Peak	Vertical
	11072.5	30.7	16.5	47.2	74.0	-26.8	Peak	Vertical
	11650.5	30.9	17.8	48.7	74.0	-25.3	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9899.5	32.1	13.6	45.7	88.2	-42.5	Peak	Horizontal
*	10401.0	30.6	15.1	45.7	88.2	-42.5	Peak	Horizontal
	10877.0	30.8	16.3	47.1	74.0	-26.9	Peak	Horizontal
	11633.5	31.2	17.7	48.9	74.0	-25.1	Peak	Horizontal
*	9993.0	30.7	13.7	44.4	88.2	-43.8	Peak	Vertical
*	10401.0	32.4	15.1	47.5	88.2	-40.7	Peak	Vertical
	11072.5	29.3	16.5	45.8	74.0	-28.2	Peak	Vertical
	11480.5	29.0	17.6	46.6	74.0	-27.4	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9857.0	30.5	13.5	44.0	88.2	-44.2	Peak	Horizontal
*	10171.5	31.4	14.1	45.5	88.2	-42.7	Peak	Horizontal
	11523.0	31.7	17.2	48.9	74.0	-25.1	Peak	Horizontal
	12152.0	31.0	17.2	48.2	74.0	-25.8	Peak	Horizontal
*	9721.0	30.9	13.5	44.4	88.2	-43.8	Peak	Vertical
*	10265.0	31.1	14.6	45.7	88.2	-42.5	Peak	Vertical
	11123.5	30.0	16.4	46.4	74.0	-27.6	Peak	Vertical
	11718.5	31.0	17.8	48.8	74.0	-25.2	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9857.0	30.5	13.5	44.0	88.2	-44.2	Peak	Horizontal
*	10171.5	31.4	14.1	45.5	88.2	-42.7	Peak	Horizontal
	11523.0	31.7	17.2	48.9	74.0	-25.1	Peak	Horizontal
	12152.0	31.0	17.2	48.2	74.0	-25.8	Peak	Horizontal
*	9721.0	30.9	13.5	44.4	88.2	-43.8	Peak	Vertical
*	10265.0	31.1	14.6	45.7	88.2	-42.5	Peak	Vertical
	11123.5	30.0	16.4	46.4	74.0	-27.6	Peak	Vertical
	11718.5	31.0	17.8	48.8	74.0	-25.2	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	10035.5	33.1	13.9	47.0	88.2	-41.2	Peak	Horizontal
*	10443.5	31.3	15.5	46.8	88.2	-41.4	Peak	Horizontal
	11327.5	29.1	17.4	46.5	74.0	-27.5	Peak	Horizontal
	11710.0	30.6	17.8	48.4	74.0	-25.6	Peak	Horizontal
*	10010.0	34.1	13.8	47.9	88.2	-40.3	Peak	Vertical
*	10265.0	30.5	14.6	45.1	88.2	-43.1	Peak	Vertical
	10800.5	31.9	16.5	48.4	74.0	-25.6	Peak	Vertical
	11174.5	32.3	17.0	49.3	74.0	-24.7	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT80	Test Channel	39
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9814.5	32.7	13.7	46.4	88.2	-41.8	Peak	Horizontal
*	10001.5	32.5	13.8	46.3	88.2	-41.9	Peak	Horizontal
	11268.0	30.7	17.0	47.7	74.0	-26.3	Peak	Horizontal
	11650.5	31.2	17.8	49.0	74.0	-25.0	Peak	Horizontal
*	9814.5	32.0	13.7	45.7	88.2	-42.5	Peak	Vertical
*	9993.0	30.7	13.7	44.4	88.2	-43.8	Peak	Vertical
	11123.5	29.9	16.4	46.3	74.0	-27.7	Peak	Vertical
	11480.5	30.2	17.6	47.8	74.0	-26.2	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9899.5	31.6	13.6	45.2	88.2	-43.0	Peak	Horizontal
*	10350.0	30.9	15.2	46.1	88.2	-42.1	Peak	Horizontal
	11242.5	31.0	17.1	48.1	74.0	-25.9	Peak	Horizontal
	11642.0	30.7	17.9	48.6	74.0	-25.4	Peak	Horizontal
*	9857.0	31.4	13.5	44.9	88.2	-43.3	Peak	Vertical
*	10214.0	30.7	14.3	45.0	88.2	-43.2	Peak	Vertical
	11123.5	30.4	16.4	46.8	74.0	-27.2	Peak	Vertical
	11880.0	31.5	17.3	48.8	74.0	-25.2	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9899.5	31.1	13.6	44.7	88.2	-43.5	Peak	Horizontal
*	10265.0	31.3	14.6	45.9	88.2	-42.3	Peak	Horizontal
	10817.5	31.4	16.5	47.9	74.0	-26.1	Peak	Horizontal
	11276.5	29.6	17.0	46.6	74.0	-27.4	Peak	Horizontal
*	9551.0	31.4	13.4	44.8	88.2	-43.4	Peak	Vertical
*	10171.5	31.7	14.1	45.8	88.2	-42.4	Peak	Vertical
	10826.0	30.2	16.4	46.6	74.0	-27.4	Peak	Vertical
	11480.5	31.0	17.6	48.6	74.0	-25.4	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9857.0	31.4	13.5	44.9	88.2	-43.3	Peak	Horizontal
*	10171.5	31.4	14.1	45.5	88.2	-42.7	Peak	Horizontal
	10732.5	31.0	15.9	46.9	74.0	-27.1	Peak	Horizontal
	11225.5	31.6	16.9	48.5	74.0	-25.5	Peak	Horizontal
*	10035.5	31.5	13.9	45.4	88.2	-42.8	Peak	Vertical
*	10401.0	30.8	15.1	45.9	88.2	-42.3	Peak	Vertical
	10936.5	31.9	16.6	48.5	74.0	-25.5	Peak	Vertical
	11897.0	31.3	17.4	48.7	74.0	-25.3	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9899.5	30.9	13.6	44.5	88.2	-43.7	Peak	Horizontal
*	10350.0	32.7	15.2	47.9	88.2	-40.3	Peak	Horizontal
	10987.5	32.1	16.4	48.5	74.0	-25.5	Peak	Horizontal
	11735.5	29.4	17.7	47.1	74.0	-26.9	Peak	Horizontal
*	9857.0	31.9	13.5	45.4	88.2	-42.8	Peak	Vertical
*	10171.5	30.8	14.1	44.9	88.2	-43.3	Peak	Vertical
	11786.5	30.3	17.6	47.9	74.0	-26.1	Peak	Vertical
	12296.5	31.6	17.6	49.2	74.0	-24.8	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9942.0	31.0	13.8	44.8	88.2	-43.4	Peak	Horizontal
*	10350.0	32.6	15.2	47.8	88.2	-40.4	Peak	Horizontal
	10987.5	32.6	16.4	49.0	74.0	-25.0	Peak	Horizontal
	11378.5	30.8	17.3	48.1	74.0	-25.9	Peak	Horizontal
*	9942.0	31.0	13.8	44.8	88.2	-43.4	Peak	Vertical
*	10273.5	32.1	14.7	46.8	88.2	-41.4	Peak	Vertical
	10928.0	30.5	16.7	47.2	74.0	-26.8	Peak	Vertical
	11310.5	31.6	17.3	48.9	74.0	-25.1	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	10078.0	31.0	13.7	44.7	88.2	-43.5	Peak	Horizontal
*	10443.5	31.1	15.5	46.6	88.2	-41.6	Peak	Horizontal
	11506.0	31.4	17.4	48.8	74.0	-25.2	Peak	Horizontal
	11786.5	29.1	17.6	46.7	74.0	-27.3	Peak	Horizontal
*	10078.0	31.4	13.7	45.1	88.2	-43.1	Peak	Vertical
*	10494.5	30.3	15.4	45.7	88.2	-42.5	Peak	Vertical
	11081.0	32.1	16.7	48.8	74.0	-25.2	Peak	Vertical
	11582.5	30.0	17.5	47.5	74.0	-26.5	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9993.0	31.7	13.7	45.4	88.2	-42.8	Peak	Horizontal
*	10265.0	30.9	14.6	45.5	88.2	-42.7	Peak	Horizontal
	10826.0	30.2	16.4	46.6	74.0	-27.4	Peak	Horizontal
	11438.0	32.1	17.2	49.3	74.0	-24.7	Peak	Horizontal
*	9993.0	31.5	13.7	45.2	88.2	-43.0	Peak	Vertical
*	10401.0	30.4	15.1	45.5	88.2	-42.7	Peak	Vertical
	11123.5	30.0	16.4	46.4	74.0	-27.6	Peak	Vertical
	11642.0	31.4	17.9	49.3	74.0	-24.7	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9857.0	32.4	13.5	45.9	88.2	-42.3	Peak	Horizontal
*	10171.5	30.7	14.1	44.8	88.2	-43.4	Peak	Horizontal
	11327.5	30.3	17.4	47.7	74.0	-26.3	Peak	Horizontal
	12177.5	31.8	17.7	49.5	74.0	-24.5	Peak	Horizontal
*	9899.5	31.7	13.6	45.3	88.2	-42.9	Peak	Vertical
*	10443.5	31.0	15.5	46.5	88.2	-41.7	Peak	Vertical
	10877.0	30.1	16.3	46.4	74.0	-27.6	Peak	Vertical
	11557.0	30.7	17.9	48.6	74.0	-25.4	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT320	Test Channel	63
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9678.5	32.1	13.5	45.6	88.2	-42.6	Peak	Horizontal
*	10214.0	30.1	14.3	44.4	88.2	-43.8	Peak	Horizontal
	11234.0	31.9	17.0	48.9	74.0	-25.1	Peak	Horizontal
	11582.5	30.6	17.5	48.1	74.0	-25.9	Peak	Horizontal
*	9993.0	31.8	13.7	45.5	88.2	-42.7	Peak	Vertical
*	10333.0	31.4	15.1	46.5	88.2	-41.7	Peak	Vertical
	11472.0	30.4	17.5	47.9	74.0	-26.1	Peak	Vertical
	11650.5	31.4	17.8	49.2	74.0	-24.8	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**ANT348 – Filter 2#:**

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9814.5	31.9	13.7	45.6	88.2	-42.6	Peak	Horizontal
*	10265.0	31.2	14.6	45.8	88.2	-42.4	Peak	Horizontal
	11072.5	32.2	16.5	48.7	74.0	-25.3	Peak	Horizontal
	12271.0	32.0	17.3	49.3	74.0	-24.7	Peak	Horizontal
*	9721.0	32.0	13.5	45.5	88.2	-42.7	Peak	Vertical
*	10120.5	31.1	14.1	45.2	88.2	-43.0	Peak	Vertical
	11030.0	31.4	16.2	47.6	74.0	-26.4	Peak	Vertical
	11633.5	30.0	17.7	47.7	74.0	-26.3	Peak	Vertical

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9942.0	31.8	13.8	45.6	88.2	-42.6	Peak	Horizontal
*	10307.5	30.9	14.9	45.8	88.2	-42.4	Peak	Horizontal
	11480.5	30.8	17.6	48.4	74.0	-25.6	Peak	Horizontal
	11854.5	31.1	17.2	48.3	74.0	-25.7	Peak	Horizontal
*	9942.0	31.4	13.8	45.2	88.2	-43.0	Peak	Vertical
*	10265.0	31.8	14.6	46.4	88.2	-41.8	Peak	Vertical
	10996.0	31.5	16.5	48.0	74.0	-26.0	Peak	Vertical
	11574.0	31.5	17.7	49.2	74.0	-24.8	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9942.0	31.8	13.8	45.6	88.2	-42.6	Peak	Horizontal
	11429.5	29.9	17.3	47.2	74.0	-26.8	Peak	Horizontal
	12169.0	29.0	17.4	46.4	74.0	-27.6	Peak	Horizontal
*	12840.5	35.4	17.1	52.5	88.2	-35.7	Peak	Horizontal
*	10214.0	30.7	14.3	45.0	88.2	-43.2	Peak	Vertical
	11174.5	29.6	17.0	46.6	74.0	-27.4	Peak	Vertical
	11786.5	29.9	17.6	47.5	74.0	-26.5	Peak	Vertical
*	12832.0	35.1	17.1	52.2	88.2	-36.0	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9857.0	31.0	13.5	44.5	88.2	-43.7	Peak	Horizontal
*	10171.5	31.8	14.1	45.9	88.2	-42.3	Peak	Horizontal
	11021.5	30.0	16.4	46.4	74.0	-27.6	Peak	Horizontal
	11506.0	30.9	17.4	48.3	74.0	-25.7	Peak	Horizontal
*	9814.5	31.5	13.7	45.2	88.2	-43.0	Peak	Vertical
	11421.0	30.3	17.4	47.7	74.0	-26.3	Peak	Vertical
	11735.5	30.0	17.7	47.7	74.0	-26.3	Peak	Vertical
	15416.0	32.2	18.7	50.9	74.0	-23.1	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	10290.5	32.4	14.8	47.2	88.2	-41.0	Peak	Horizontal
*	10537.0	31.7	15.2	46.9	88.2	-41.3	Peak	Horizontal
	10877.0	30.6	16.3	46.9	74.0	-27.1	Peak	Horizontal
	11489.0	31.0	17.7	48.7	74.0	-25.3	Peak	Horizontal
*	9993.0	32.3	13.7	46.0	88.2	-42.2	Peak	Vertical
	10732.5	32.1	15.9	48.0	74.0	-26.0	Peak	Vertical
	11497.5	32.0	17.6	49.6	74.0	-24.4	Peak	Vertical
*	13597.0	32.7	18.7	51.4	88.2	-36.8	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	10341.5	31.8	15.1	46.9	88.2	-41.3	Peak	Horizontal
	10800.5	31.6	16.5	48.1	74.0	-25.9	Peak	Horizontal
	11489.0	30.8	17.7	48.5	74.0	-25.5	Peak	Horizontal
*	12806.5	33.9	17.0	50.9	88.2	-37.3	Peak	Horizontal
*	10214.0	30.5	14.3	44.8	88.2	-43.4	Peak	Vertical
	11123.5	31.1	16.4	47.5	74.0	-26.5	Peak	Vertical
	12007.5	30.1	17.0	47.1	74.0	-26.9	Peak	Vertical
*	12806.5	35.5	17.0	52.5	88.2	-35.7	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9942.0	31.5	13.8	45.3	88.2	-42.9	Peak	Horizontal
*	10494.5	31.1	15.4	46.5	88.2	-41.7	Peak	Horizontal
	10826.0	32.1	16.4	48.5	74.0	-25.5	Peak	Horizontal
	11557.0	31.3	17.9	49.2	74.0	-24.8	Peak	Horizontal
*	9678.5	31.9	13.5	45.4	88.2	-42.8	Peak	Vertical
*	10120.5	30.5	14.1	44.6	88.2	-43.6	Peak	Vertical
	10911.0	32.0	16.6	48.6	74.0	-25.4	Peak	Vertical
	11693.0	31.1	17.3	48.4	74.0	-25.6	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9942.0	31.4	13.8	45.2	88.2	-43.0	Peak	Horizontal
*	10307.5	30.6	14.9	45.5	88.2	-42.7	Peak	Horizontal
	11106.5	31.9	16.7	48.6	74.0	-25.4	Peak	Horizontal
	11786.5	30.6	17.6	48.2	74.0	-25.8	Peak	Horizontal
*	9993.0	31.8	13.7	45.5	88.2	-42.7	Peak	Vertical
*	10443.5	31.5	15.5	47.0	88.2	-41.2	Peak	Vertical
	11191.5	30.7	16.9	47.6	74.0	-26.4	Peak	Vertical
	11548.5	31.1	17.7	48.8	74.0	-25.2	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	10120.5	31.1	14.1	45.2	88.2	-43.0	Peak	Horizontal
	11021.5	30.5	16.4	46.9	74.0	-27.1	Peak	Horizontal
	11684.5	31.3	17.3	48.6	74.0	-25.4	Peak	Horizontal
*	12789.5	34.2	17.0	51.2	88.2	-37.0	Peak	Horizontal
*	9772.0	31.9	13.5	45.4	88.2	-42.8	Peak	Vertical
*	10078.0	31.5	13.7	45.2	88.2	-43.0	Peak	Vertical
	11480.5	30.7	17.6	48.3	74.0	-25.7	Peak	Vertical
	12262.5	31.8	17.4	49.2	74.0	-24.8	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9772.0	31.5	13.5	45.0	88.2	-43.2	Peak	Horizontal
*	10171.5	31.8	14.1	45.9	88.2	-42.3	Peak	Horizontal
	11021.5	30.3	16.4	46.7	74.0	-27.3	Peak	Horizontal
	11506.0	32.5	17.4	49.9	74.0	-24.1	Peak	Horizontal
*	9899.5	31.1	13.6	44.7	88.2	-43.5	Peak	Vertical
*	10078.0	30.9	13.7	44.6	88.2	-43.6	Peak	Vertical
	10800.5	31.7	16.5	48.2	74.0	-25.8	Peak	Vertical
	11472.0	30.4	17.5	47.9	74.0	-26.1	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9814.5	31.4	13.7	45.1	88.2	-43.1	Peak	Horizontal
*	10120.5	31.5	14.1	45.6	88.2	-42.6	Peak	Horizontal
	10970.5	31.0	16.2	47.2	74.0	-26.8	Peak	Horizontal
	11472.0	30.4	17.5	47.9	74.0	-26.1	Peak	Horizontal
*	9942.0	32.0	13.8	45.8	88.2	-42.4	Peak	Vertical
*	10307.5	30.2	14.9	45.1	88.2	-43.1	Peak	Vertical
	10928.0	31.5	16.7	48.2	74.0	-25.8	Peak	Vertical
	11642.0	30.6	17.9	48.5	74.0	-25.5	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11ax-HE160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9772.0	30.4	13.5	43.9	88.2	-44.3	Peak	Horizontal
*	10265.0	30.1	14.6	44.7	88.2	-43.5	Peak	Horizontal
	10877.0	30.2	16.3	46.5	74.0	-27.5	Peak	Horizontal
	11344.5	31.4	17.3	48.7	74.0	-25.3	Peak	Horizontal
*	9857.0	31.3	13.5	44.8	88.2	-43.4	Peak	Vertical
*	10494.5	29.9	15.4	45.3	88.2	-42.9	Peak	Vertical
	11081.0	31.5	16.7	48.2	74.0	-25.8	Peak	Vertical
	11701.5	31.2	17.5	48.7	74.0	-25.3	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	10035.5	31.7	13.9	45.6	88.2	-42.6	Peak	Horizontal
*	10350.0	30.6	15.2	45.8	88.2	-42.4	Peak	Horizontal
	11089.5	32.8	16.8	49.6	74.0	-24.4	Peak	Horizontal
	11795.0	30.4	17.7	48.1	74.0	-25.9	Peak	Horizontal
*	9814.5	30.9	13.7	44.6	88.2	-43.6	Peak	Vertical
*	10307.5	30.3	14.9	45.2	88.2	-43.0	Peak	Vertical
	10673.0	31.9	16.3	48.2	74.0	-25.8	Peak	Vertical
	11174.5	29.7	17.0	46.7	74.0	-27.3	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	10078.0	31.1	13.7	44.8	88.2	-43.4	Peak	Horizontal
*	10443.5	31.4	15.5	46.9	88.2	-41.3	Peak	Horizontal
	12126.5	29.3	17.2	46.5	74.0	-27.5	Peak	Horizontal
	12441.0	30.3	16.6	46.9	74.0	-27.1	Peak	Horizontal
*	9993.0	31.1	13.7	44.8	88.2	-43.4	Peak	Vertical
*	10494.5	30.4	15.4	45.8	88.2	-42.4	Peak	Vertical
	11072.5	30.5	16.5	47.0	74.0	-27.0	Peak	Vertical
	11557.0	30.9	17.9	48.8	74.0	-25.2	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9942.0	31.2	13.8	45.0	88.2	-43.2	Peak	Horizontal
	10877.0	30.7	16.3	47.0	74.0	-27.0	Peak	Horizontal
	11897.0	29.4	17.4	46.8	74.0	-27.2	Peak	Horizontal
*	12840.5	35.9	17.1	53.0	88.2	-35.2	Peak	Horizontal
*	10265.0	31.0	14.6	45.6	88.2	-42.6	Peak	Vertical
	10877.0	30.0	16.3	46.3	74.0	-27.7	Peak	Vertical
	12007.5	28.9	17.0	45.9	74.0	-28.1	Peak	Vertical
*	12840.5	34.1	17.1	51.2	88.2	-37.0	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9857.0	30.4	13.5	43.9	88.2	-44.3	Peak	Horizontal
*	10443.5	32.0	15.5	47.5	88.2	-40.7	Peak	Horizontal
	10809.0	31.9	16.5	48.4	74.0	-25.6	Peak	Horizontal
	11276.5	30.0	17.0	47.0	74.0	-27.0	Peak	Horizontal
*	10044.0	30.9	13.9	44.8	88.2	-43.4	Peak	Vertical
*	10171.5	31.0	14.1	45.1	88.2	-43.1	Peak	Vertical
	10860.0	31.7	16.4	48.1	74.0	-25.9	Peak	Vertical
	11463.5	31.4	17.5	48.9	74.0	-25.1	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9857.0	30.2	13.5	43.7	88.2	-44.5	Peak	Horizontal
*	10307.5	30.5	14.9	45.4	88.2	-42.8	Peak	Horizontal
	11081.0	31.2	16.7	47.9	74.0	-26.1	Peak	Horizontal
	11642.0	31.5	17.9	49.4	74.0	-24.6	Peak	Horizontal
*	9678.5	33.0	13.5	46.5	88.2	-41.7	Peak	Vertical
*	10171.5	30.0	14.1	44.1	88.2	-44.1	Peak	Vertical
	10826.0	29.7	16.4	46.1	74.0	-27.9	Peak	Vertical
	11463.5	31.2	17.5	48.7	74.0	-25.3	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	10681.5	29.8	16.3	46.1	74.0	-27.9	Peak	Horizontal
	11429.5	29.0	17.3	46.3	74.0	-27.7	Peak	Horizontal
*	12798.0	32.5	17.0	49.5	88.2	-38.7	Peak	Horizontal
*	13206.0	31.7	18.0	49.7	88.2	-38.5	Peak	Horizontal
*	9899.5	31.1	13.6	44.7	88.2	-43.5	Peak	Vertical
*	10443.5	31.5	15.5	47.0	88.2	-41.2	Peak	Vertical
	11072.5	30.2	16.5	46.7	74.0	-27.3	Peak	Vertical
	11557.0	31.3	17.9	49.2	74.0	-24.8	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9993.0	31.1	13.7	44.8	88.2	-43.4	Peak	Horizontal
*	10171.5	31.2	14.1	45.3	88.2	-42.9	Peak	Horizontal
	11013.0	32.4	16.5	48.9	74.0	-25.1	Peak	Horizontal
	11225.5	29.5	16.9	46.4	74.0	-27.6	Peak	Horizontal
*	9942.0	31.1	13.8	44.9	88.2	-43.3	Peak	Vertical
*	10350.0	30.9	15.2	46.1	88.2	-42.1	Peak	Vertical
	11030.0	31.8	16.2	48.0	74.0	-26.0	Peak	Vertical
	11582.5	30.0	17.5	47.5	74.0	-26.5	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9942.0	31.4	13.8	45.2	88.2	-43.0	Peak	Horizontal
*	10307.5	30.6	14.9	45.5	88.2	-42.7	Peak	Horizontal
	11123.5	31.2	16.4	47.6	74.0	-26.4	Peak	Horizontal
	11514.5	31.4	17.3	48.7	74.0	-25.3	Peak	Horizontal
*	9636.0	30.8	13.4	44.2	88.2	-44.0	Peak	Vertical
*	10078.0	31.1	13.7	44.8	88.2	-43.4	Peak	Vertical
	10953.5	31.8	16.3	48.1	74.0	-25.9	Peak	Vertical
	11846.0	30.4	17.1	47.5	74.0	-26.5	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	10120.5	31.6	14.1	45.7	88.2	-42.5	Peak	Horizontal
	11123.5	29.7	16.4	46.1	74.0	-27.9	Peak	Horizontal
	11616.5	31.3	17.4	48.7	74.0	-25.3	Peak	Horizontal
*	12781.0	33.1	17.0	50.1	88.2	-38.1	Peak	Horizontal
*	10214.0	31.2	14.3	45.5	88.2	-42.7	Peak	Vertical
	11225.5	29.7	16.9	46.6	74.0	-27.4	Peak	Vertical
	11948.0	30.0	16.9	46.9	74.0	-27.1	Peak	Vertical
*	12772.5	33.7	17.0	50.7	88.2	-37.5	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9551.0	31.4	13.4	44.8	88.2	-43.4	Peak	Horizontal
*	9993.0	31.0	13.7	44.7	88.2	-43.5	Peak	Horizontal
	11072.5	30.8	16.5	47.3	74.0	-26.7	Peak	Horizontal
	11574.0	31.7	17.7	49.4	74.0	-24.6	Peak	Horizontal
*	10120.5	31.0	14.1	45.1	88.2	-43.1	Peak	Vertical
*	10537.0	30.8	15.2	46.0	88.2	-42.2	Peak	Vertical
	11276.5	29.2	17.0	46.2	74.0	-27.8	Peak	Vertical
	11718.5	30.5	17.8	48.3	74.0	-25.7	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9721.0	32.6	13.5	46.1	88.2	-42.1	Peak	Horizontal
*	10214.0	30.6	14.3	44.9	88.2	-43.3	Peak	Horizontal
	11081.0	31.4	16.7	48.1	74.0	-25.9	Peak	Horizontal
	11948.0	30.0	16.9	46.9	74.0	-27.1	Peak	Horizontal
*	9678.5	31.9	13.5	45.4	88.2	-42.8	Peak	Vertical
*	10350.0	30.3	15.2	45.5	88.2	-42.7	Peak	Vertical
	11021.5	29.6	16.4	46.0	74.0	-28.0	Peak	Vertical
	11361.5	31.8	17.2	49.0	74.0	-25.0	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9593.5	31.3	13.3	44.6	88.2	-43.6	Peak	Horizontal
*	9993.0	30.8	13.7	44.5	88.2	-43.7	Peak	Horizontal
	11021.5	30.4	16.4	46.8	74.0	-27.2	Peak	Horizontal
	11378.5	28.9	17.3	46.2	74.0	-27.8	Peak	Horizontal
*	9899.5	31.5	13.6	45.1	88.2	-43.1	Peak	Vertical
*	10171.5	31.1	14.1	45.2	88.2	-43.0	Peak	Vertical
	10970.5	29.0	16.2	45.2	74.0	-28.8	Peak	Vertical
	11786.5	31.7	17.6	49.3	74.0	-24.7	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT320	Test Channel	31
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9678.5	32.0	13.5	45.5	88.2	-42.7	Peak	Horizontal
*	9993.0	30.2	13.7	43.9	88.2	-44.3	Peak	Horizontal
	10783.5	30.8	16.1	46.9	74.0	-27.1	Peak	Horizontal
	11557.0	31.1	17.9	49.0	74.0	-25.0	Peak	Horizontal
*	9772.0	30.9	13.5	44.4	88.2	-43.8	Peak	Vertical
*	10214.0	31.3	14.3	45.6	88.2	-42.6	Peak	Vertical
	10970.5	30.3	16.2	46.5	74.0	-27.5	Peak	Vertical
	11557.0	30.7	17.9	48.6	74.0	-25.4	Peak	Vertical

Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-03-03 ~ 2024-03-08
Test Mode	802.11be-EHT320	Test Channel	63
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	9644.5	34.1	13.5	47.6	88.2	-40.6	Peak	Horizontal
*	10171.5	30.8	14.1	44.9	88.2	-43.3	Peak	Horizontal
	10877.0	30.1	16.3	46.4	74.0	-27.6	Peak	Horizontal
	11548.5	30.6	17.7	48.3	74.0	-25.7	Peak	Horizontal
*	10035.5	31.4	13.9	45.3	88.2	-42.9	Peak	Vertical
*	10401.0	31.2	15.1	46.3	88.2	-41.9	Peak	Vertical
	11319.0	31.4	17.4	48.8	74.0	-25.2	Peak	Vertical
	11429.5	29.7	17.3	47.0	74.0	-27.0	Peak	Vertical


Note 1: \*\* is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**The Result of Radiated Emission for 9kHz ~ 30MHz:**

Site: WZ-AC2	Test Date: 2024-03-10
Limit: FCC_Part15.209_RSE	Engineer: Bob Zhang
Probe: FMZB1519_0.009-30MHz	Polarity: Coaxial
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 6535MHz	

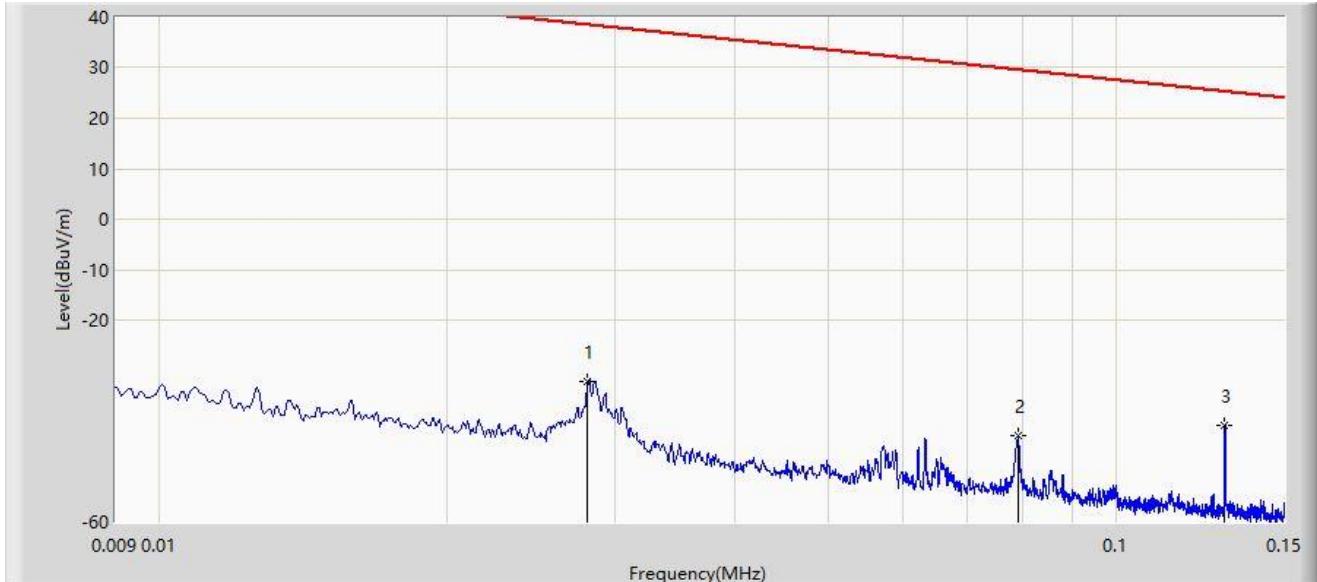

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		0.028	-32.046	28.848	-70.693	38.647	-60.893	PK
2		0.079	-43.011	19.064	-72.654	29.643	-62.076	PK
3	*	0.130	-40.850	21.297	-66.168	25.319	-62.147	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC2	Test Date: 2024-03-10
Limit: FCC_Part15.209_RSE	Engineer: Bob Zhang
Probe: FMZB1519_0.009-30MHz	Polarity: Coplanar
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 6535MHz	

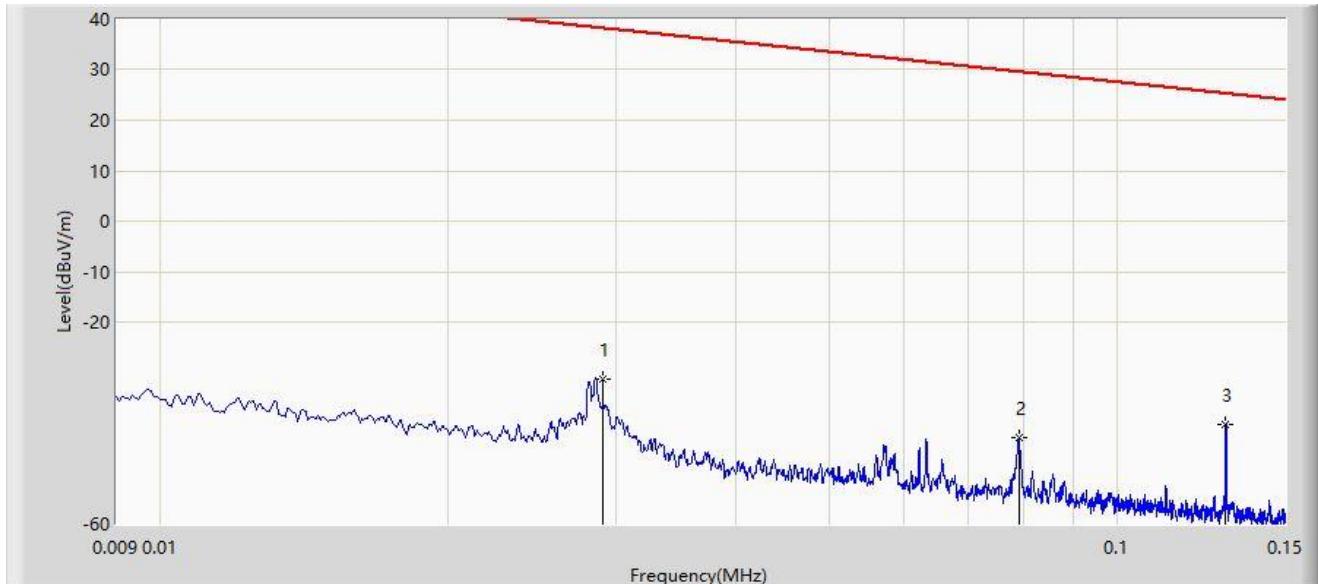

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		0.029	-31.177	29.807	-69.519	38.342	-60.984	PK
2		0.079	-43.015	19.060	-72.658	29.643	-62.076	PK
3	*	0.130	-40.347	21.800	-65.665	25.319	-62.147	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC2	Test Date: 2024-03-10
Limit: FCC_Part15.209_RSE	Engineer: Bob Zhang
Probe: FMZB1519_0.009-30MHz	Polarity: Coaxial
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 6535MHz	

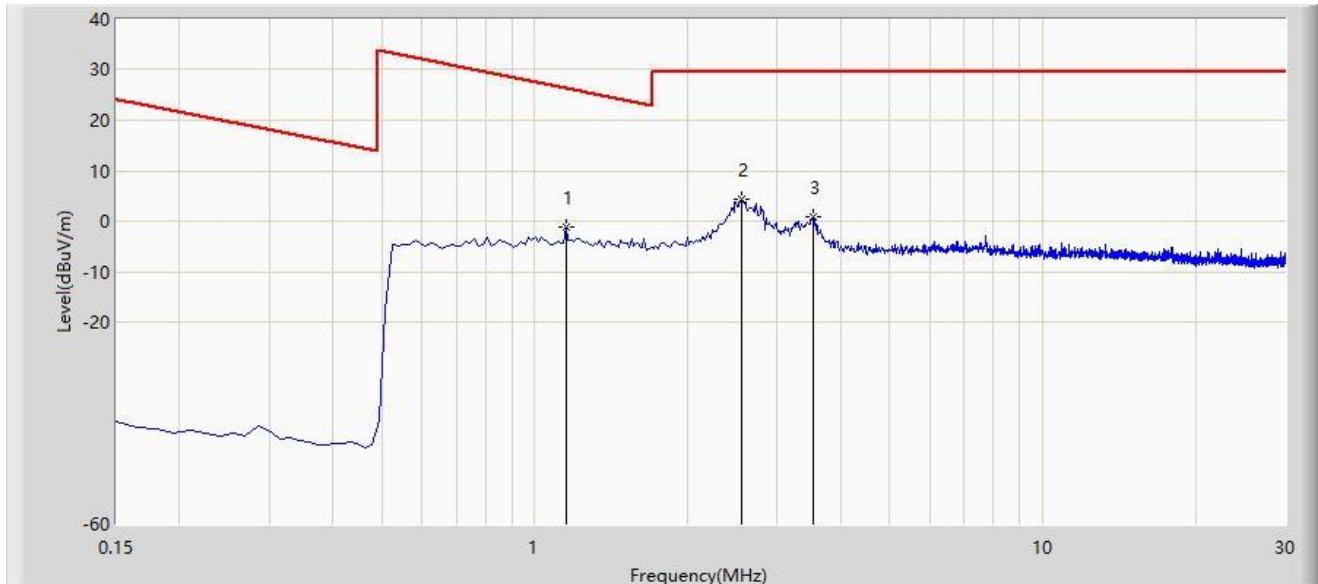

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		1.150	-1.199	20.591	-27.610	26.411	-21.790	PK
2	*	2.553	4.316	26.124	-25.184	29.500	-21.808	PK
3		3.538	0.945	22.711	-28.555	29.500	-21.765	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC2	Test Date: 2024-03-10
Limit: FCC_Part15.209_RSE	Engineer: Bob Zhang
Probe: FMZB1519_0.009-30MHz	Polarity: Coplanar
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 6535MHz	

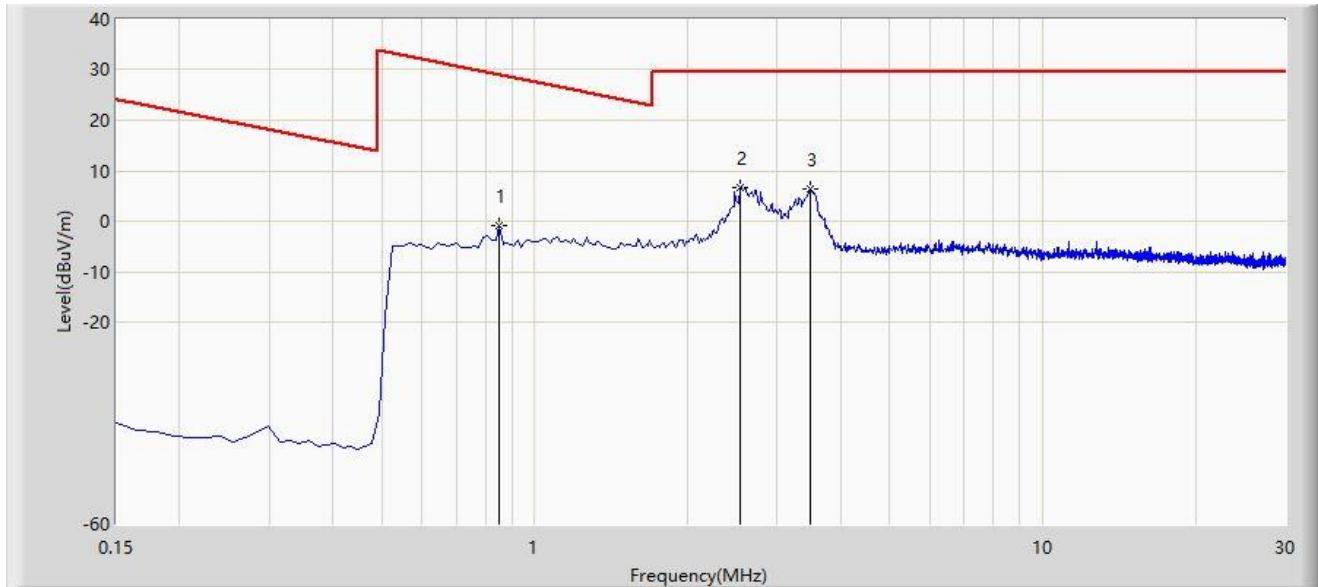

No	Mark	Frequency (MHz)	Measure Level (dBµV/m)	Reading Level (dBµV)	Margin (dB)	Limit (dBµV/m)	Factor (dB/m)	Type
1		0.851	-0.864	20.922	-29.883	29.019	-21.787	PK
2	*	2.538	6.737	28.546	-22.763	29.500	-21.810	PK
3		3.478	6.267	28.035	-23.233	29.500	-21.767	PK

Note 1: " \* ", means this data is the worst emission level.


Note 2: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

**The Result of Radiated Emission for 30MHz ~ 1GHz:**

Site: WZ-AC2	Test Date: 2024-03-15
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bob Zhang
Probe: VULB9162_30-7000MHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 6535MHz	

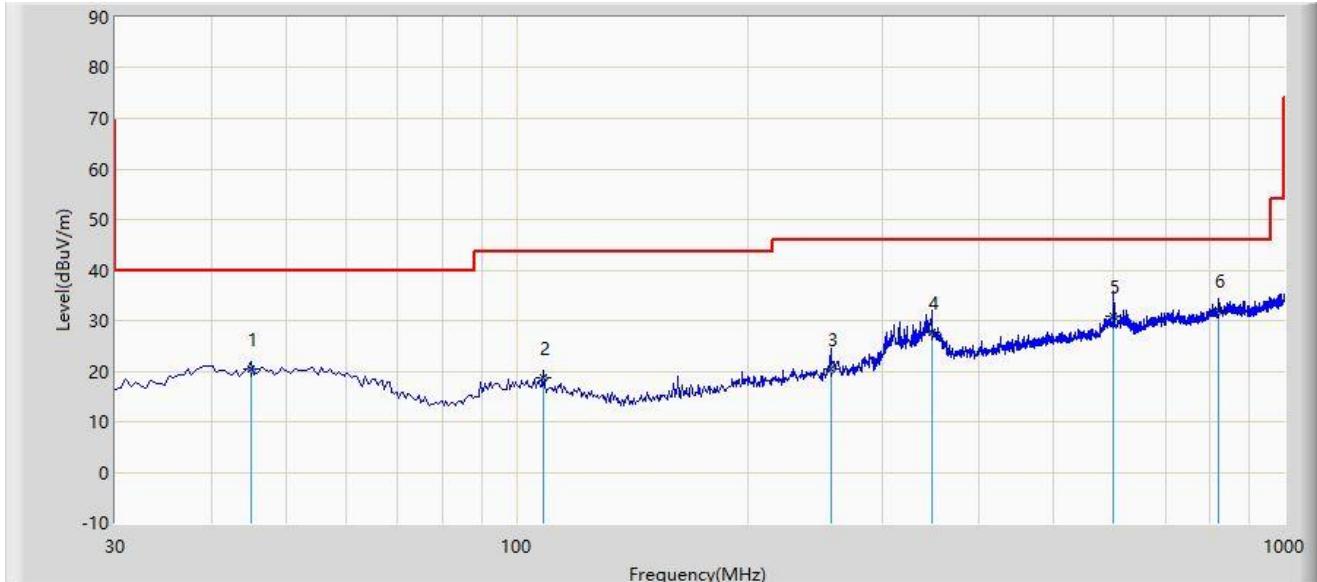


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		45.035	20.456	0.120	-19.544	40.000	20.336	QP
2		108.570	18.827	0.600	-24.673	43.500	18.227	QP
3		256.495	20.462	0.140	-25.538	46.000	20.323	QP
4		347.685	27.816	5.030	-18.184	46.000	22.786	QP
5		599.845	30.759	3.200	-15.241	46.000	27.559	QP
6	*	822.065	31.942	1.100	-14.058	46.000	30.842	QP

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-03-15
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bob Zhang
Probe: VULB9162_30-7000MHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 6535MHz	

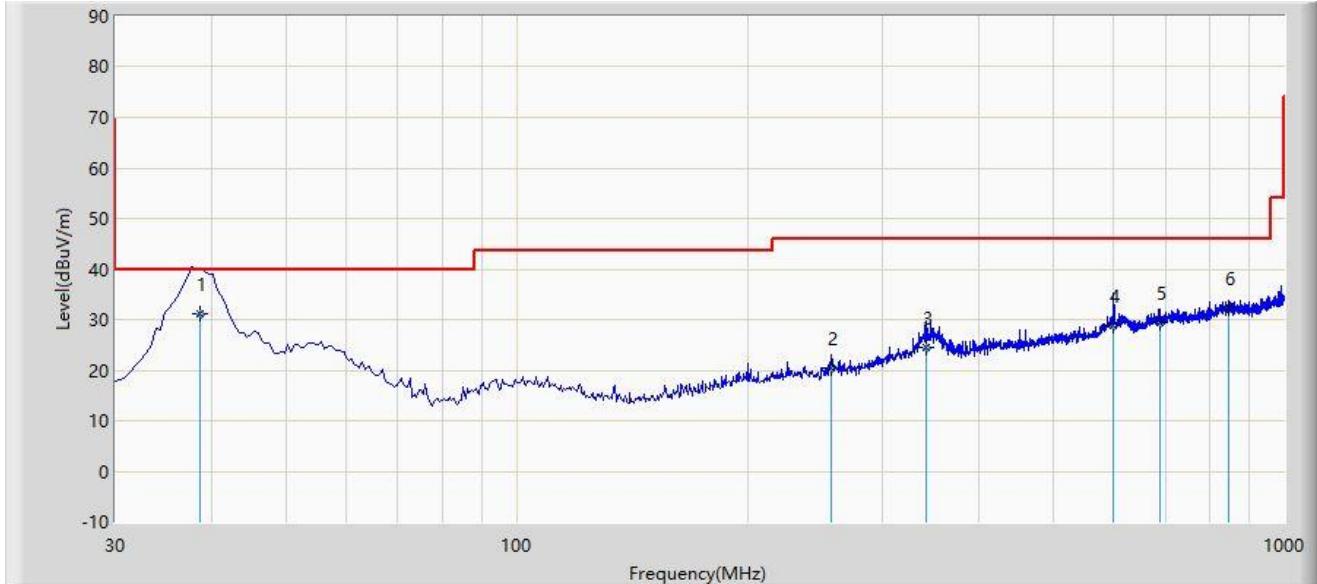

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	38.730	31.043	12.400	-8.957	40.000	18.643	QP
2		256.950	20.487	0.140	-25.513	46.000	20.347	QP
3		341.370	24.607	2.100	-21.393	46.000	22.507	QP
4		599.875	28.758	1.200	-17.242	46.000	27.559	QP
5		689.205	29.339	0.600	-16.661	46.000	28.739	QP
6		844.800	32.401	1.100	-13.599	46.000	31.301	QP


Note 1: "\*" means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

**The Result of Radiated Emission for above 18GHz:**

Site: WZ-AC2	Test Date: 2024-03-16
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bob Zhang
Probe: BBHA9170_549_18-40GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 6115MHz	

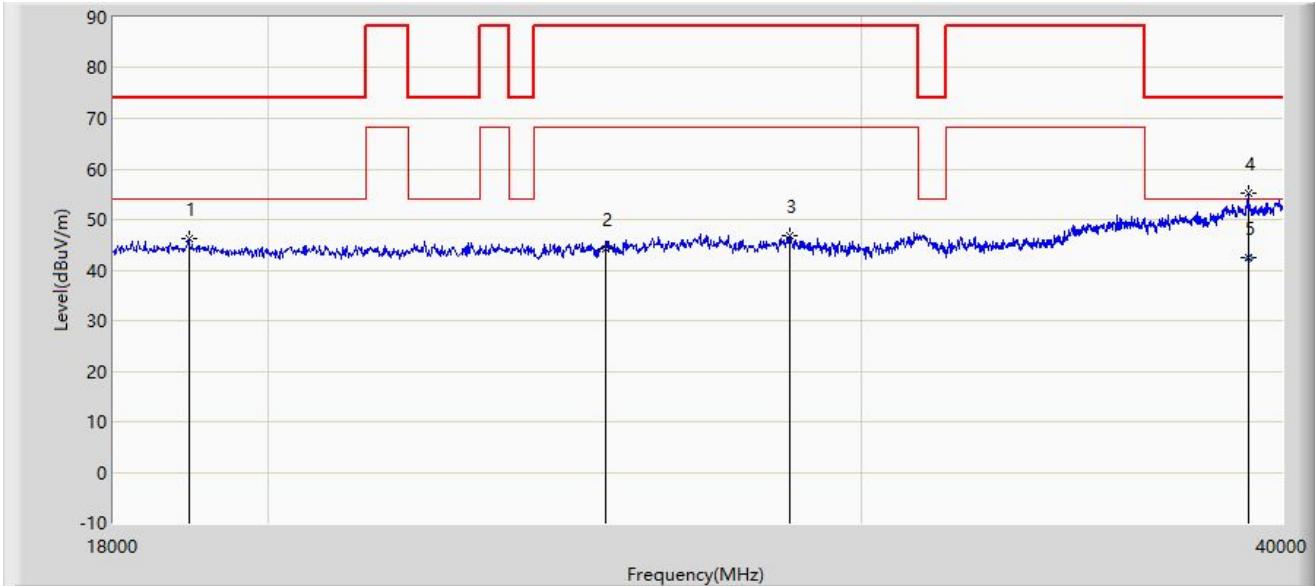

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		18957.000	46.105	56.125	-27.895	74.000	-10.020	PK
2		25194.000	44.240	51.364	-43.960	88.200	-7.124	PK
3		28582.000	46.667	53.793	-41.533	88.200	-7.126	PK
4		39076.000	55.108	55.829	-18.892	74.000	-0.721	PK
5	*	39076.000	42.435	43.156	-11.565	54.000	-0.721	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

Site: WZ-AC2	Test Date: 2024-03-16
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bob Zhang
Probe: BBHA9170_549_18-40GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 6115MHz	

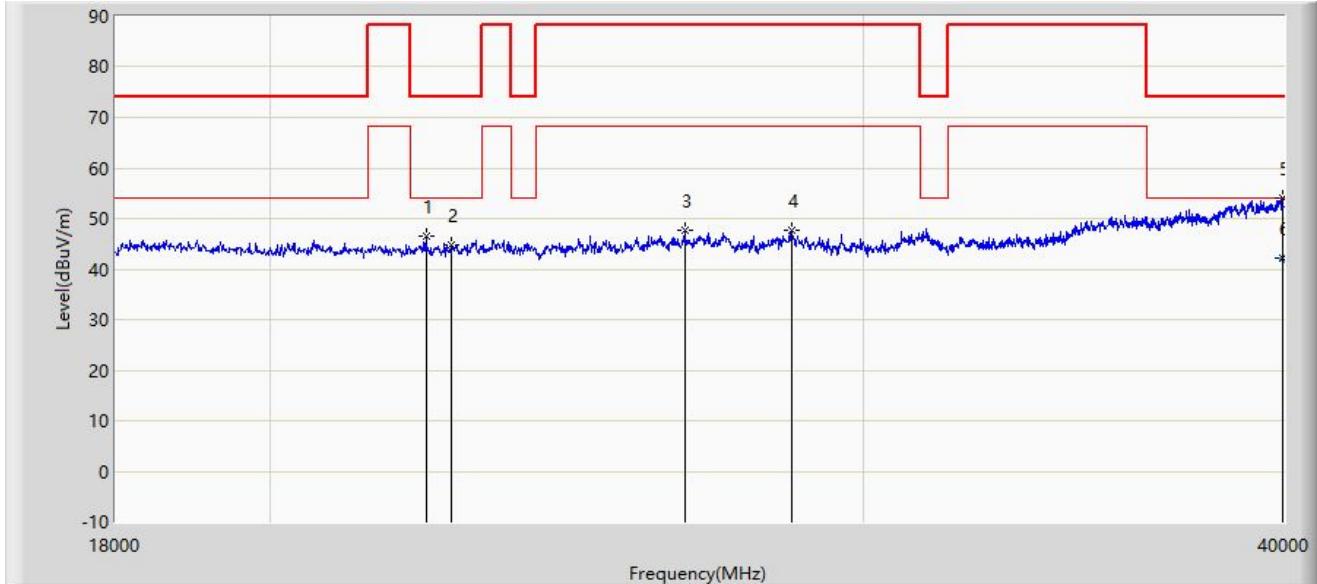

No	Mark	Frequency (MHz)	Measure Level (dBµV/m)	Reading Level (dBµV)	Margin (dB)	Limit (dBµV/m)	Factor (dB/m)	Type
1		22257.000	46.395	54.086	-27.605	74.000	-7.692	PK
2		22653.000	44.882	53.087	-29.118	74.000	-8.206	PK
3		26558.000	47.812	54.448	-40.388	88.200	-6.636	PK
4		28571.000	47.620	54.741	-40.580	88.200	-7.120	PK
5		39967.000	54.201	53.264	-19.799	74.000	0.937	PK
6	*	39967.000	42.266	41.329	-11.734	54.000	0.937	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

### A.8 Radiated Restricted Band Edge Test Result

ANT311 – Filter 1#:

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 6115MHz	

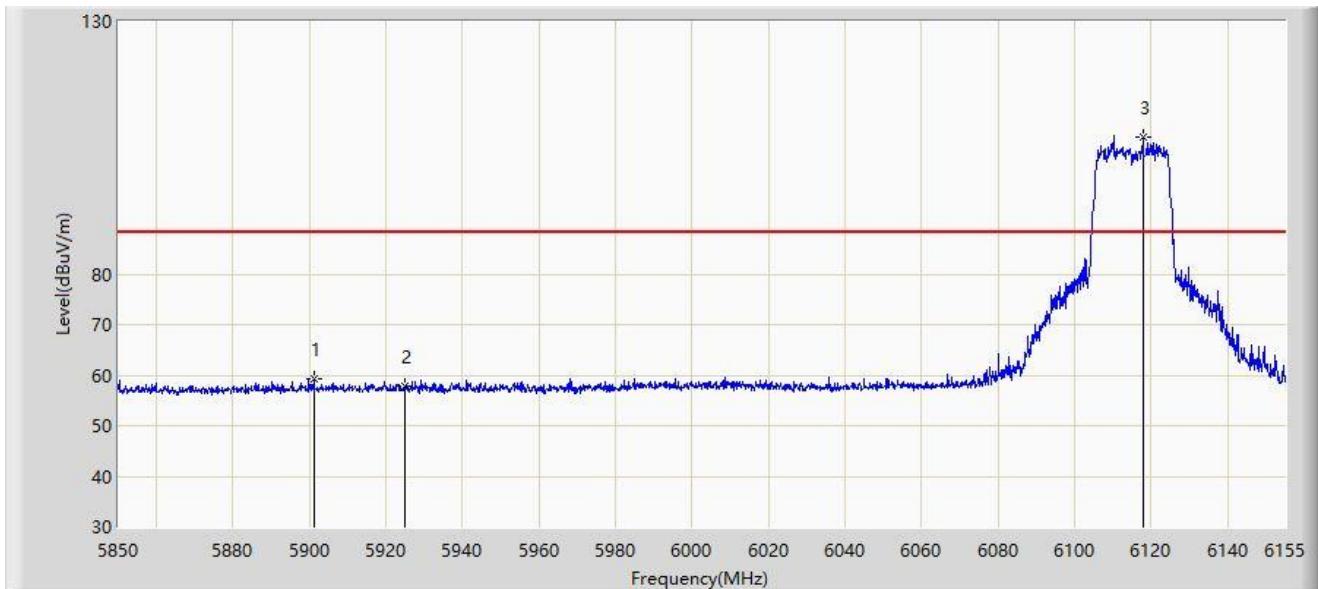


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5901.087	59.230	54.634	-28.970	88.200	4.595	PK
2		5925.000	57.874	53.243	-30.326	88.200	4.631	PK
3		6117.790	107.197	102.282	N/A	N/A	4.915	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 6115MHz	

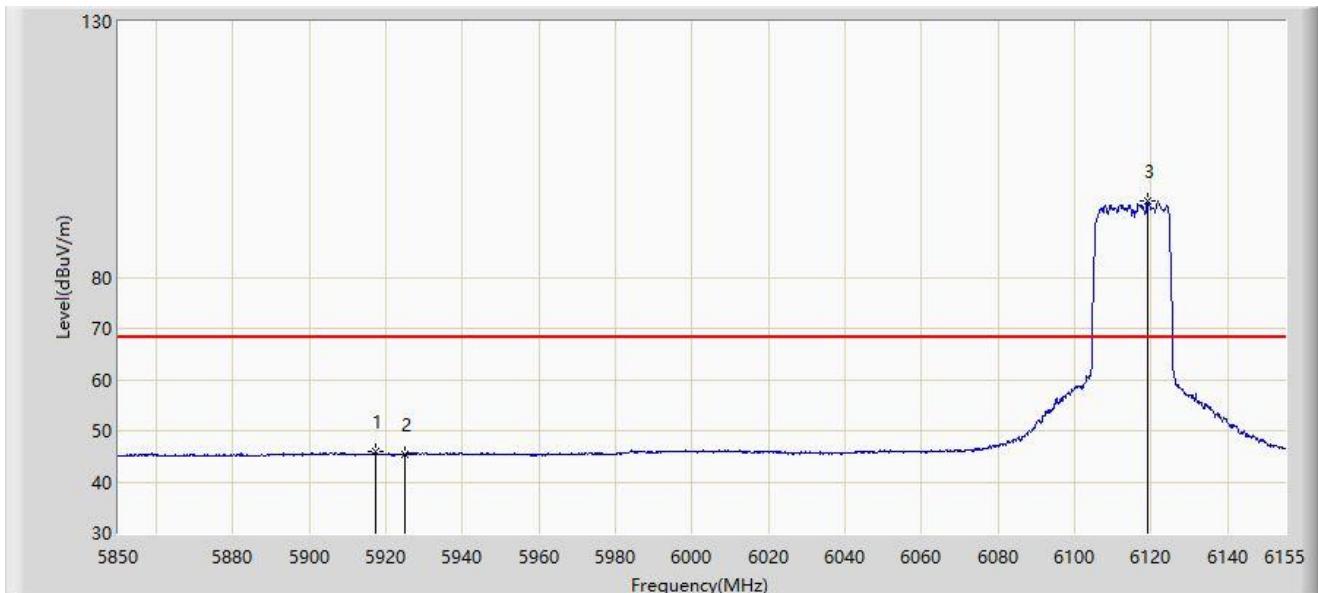


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5917.252	45.823	41.182	-22.377	68.200	4.642	AV
2		5925.000	45.363	40.732	-22.837	68.200	4.631	AV
3		6119.163	94.797	89.900	N/A	N/A	4.897	AV

Note 1: "\*" means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 6115MHz	

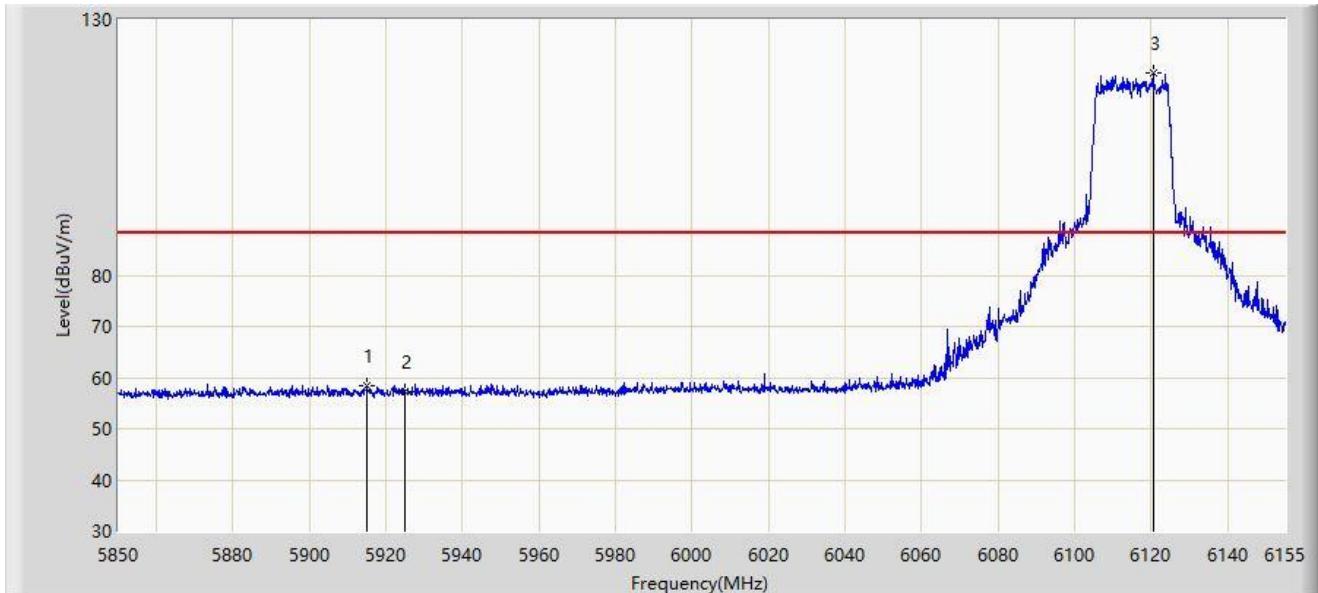


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5915.118	58.470	53.825	-29.730	88.200	4.645	PK
2		5925.000	57.346	52.715	-30.854	88.200	4.631	PK
3		6120.535	119.598	114.719	N/A	N/A	4.879	PK

Note 1: "\*" means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 6115MHz	

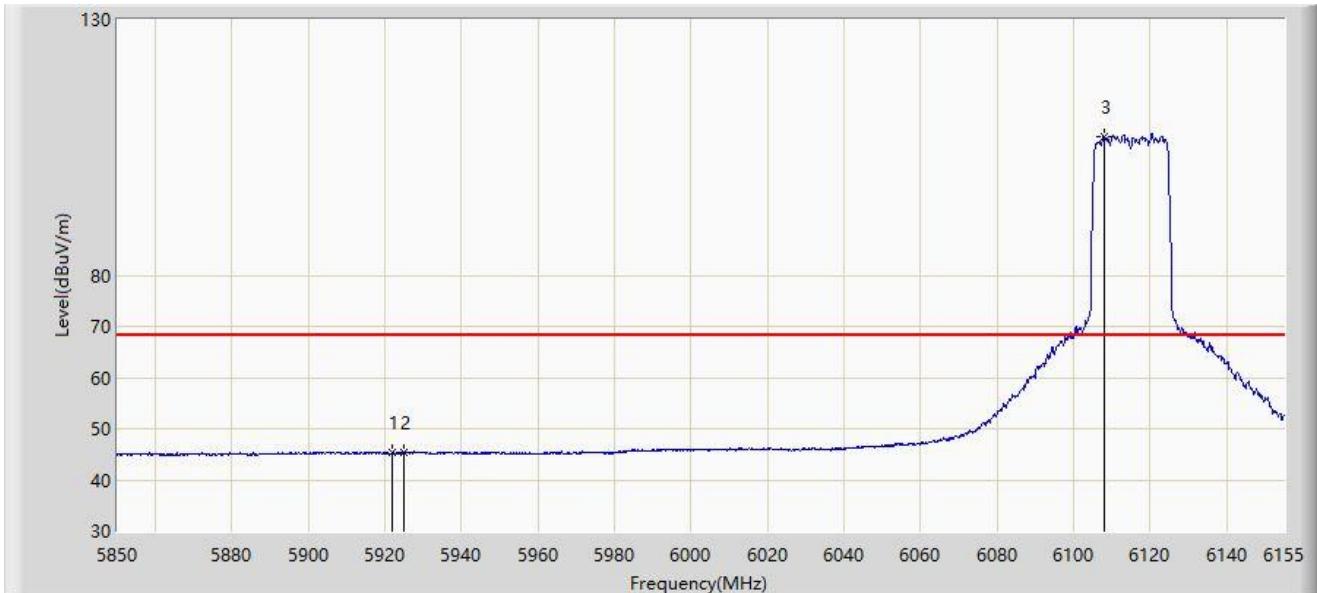


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5921.980	45.368	40.734	-22.832	68.200	4.634	AV
2		5925.000	45.240	40.609	-22.960	68.200	4.631	AV
3		6108.030	107.185	102.158	N/A	N/A	5.027	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 6855MHz	

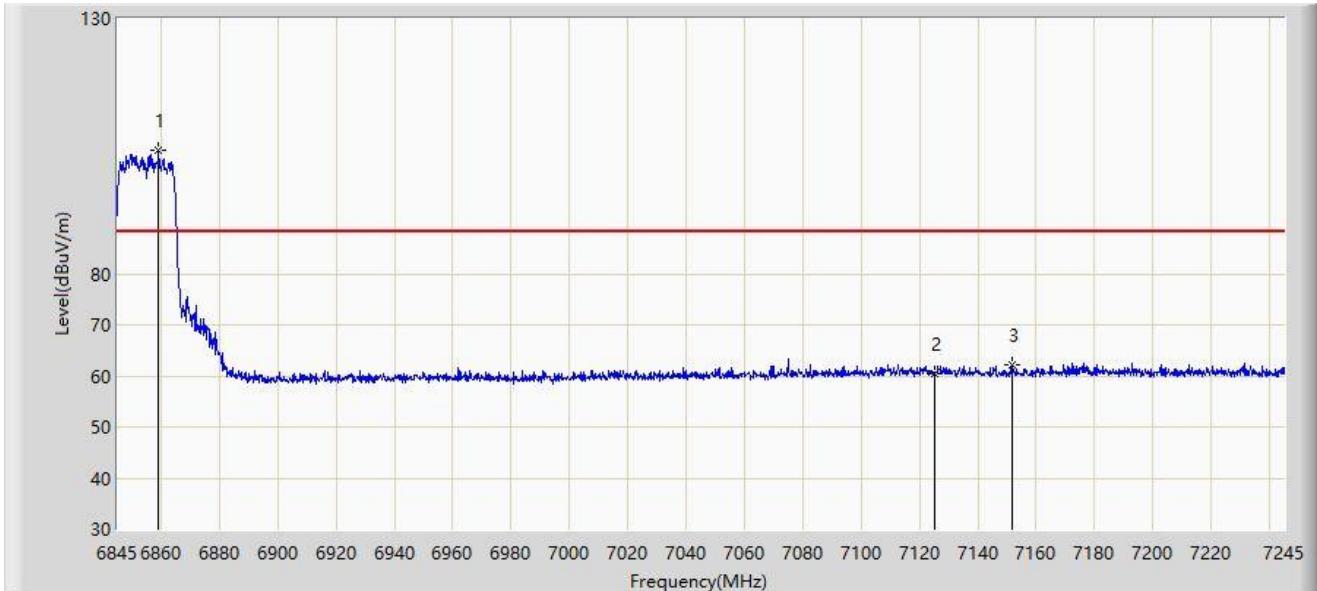


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		6859.000	104.234	97.501	N/A	N/A	6.732	PK
2		7125.000	60.472	52.408	-27.728	88.200	8.064	PK
3	*	7151.800	62.288	54.305	-25.912	88.200	7.984	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 6855MHz	

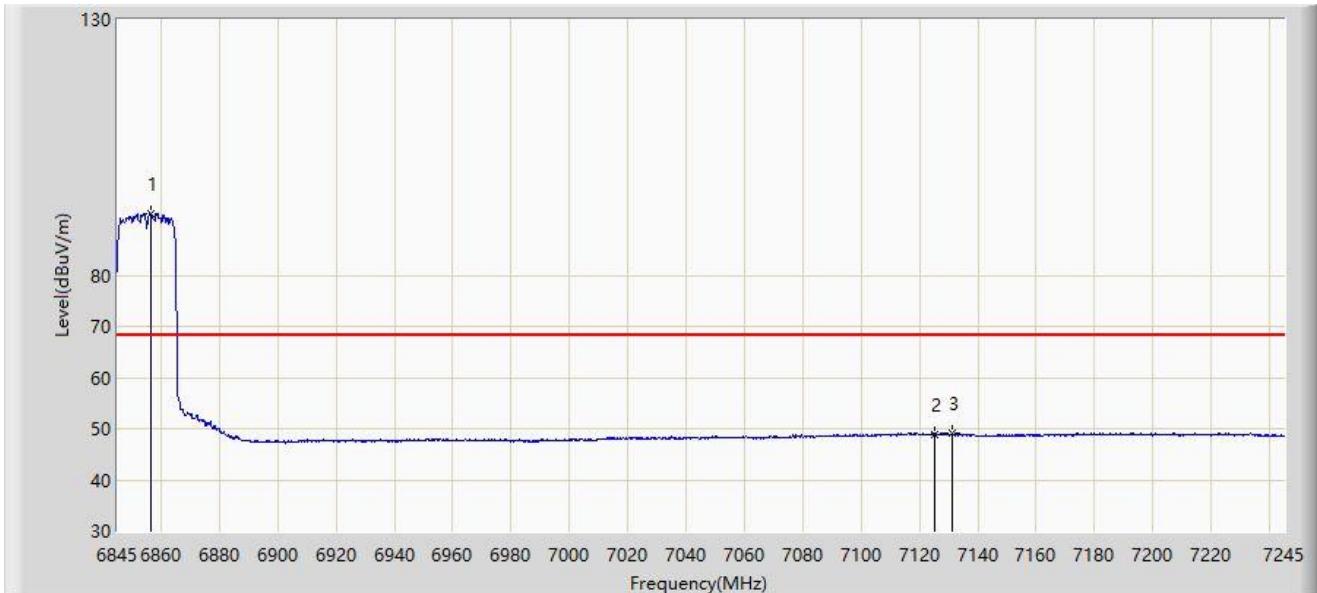


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		6856.600	91.976	85.269	N/A	N/A	6.706	AV
2		7125.000	48.841	40.777	-19.359	68.200	8.064	AV
3	*	7131.400	49.120	41.108	-19.080	68.200	8.012	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 6855MHz	

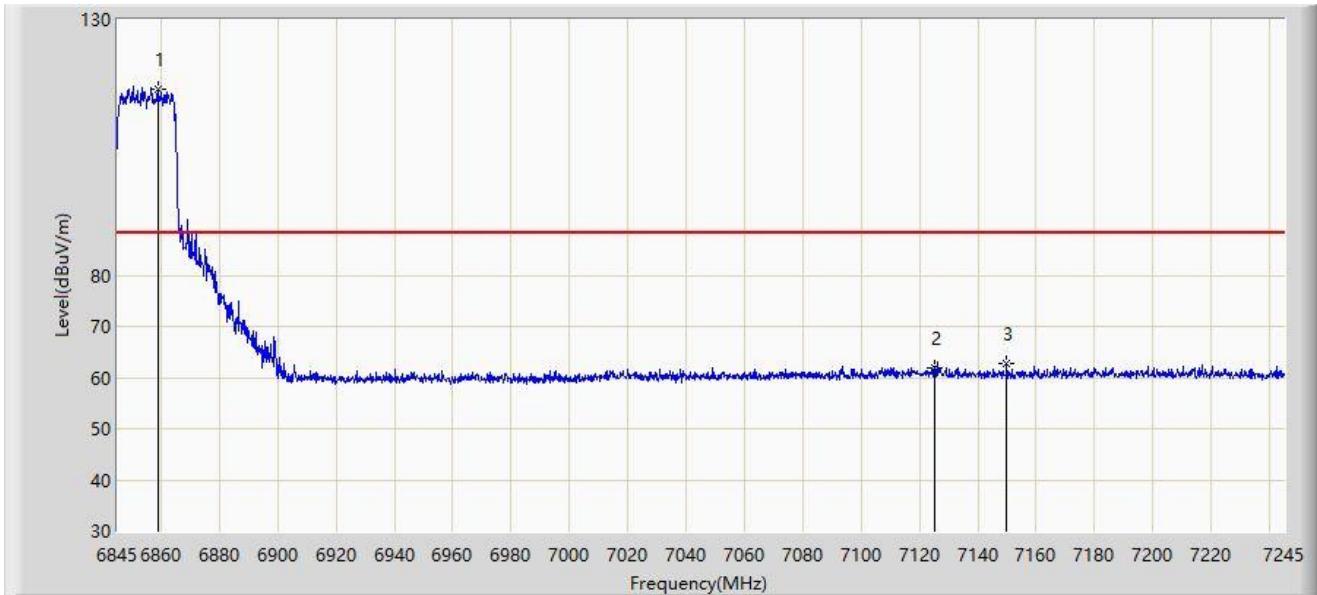


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		6859.000	116.517	109.784	N/A	N/A	6.732	PK
2		7125.000	61.882	53.818	-26.318	88.200	8.064	PK
3	*	7150.000	62.769	54.788	-25.431	88.200	7.981	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 6855MHz	

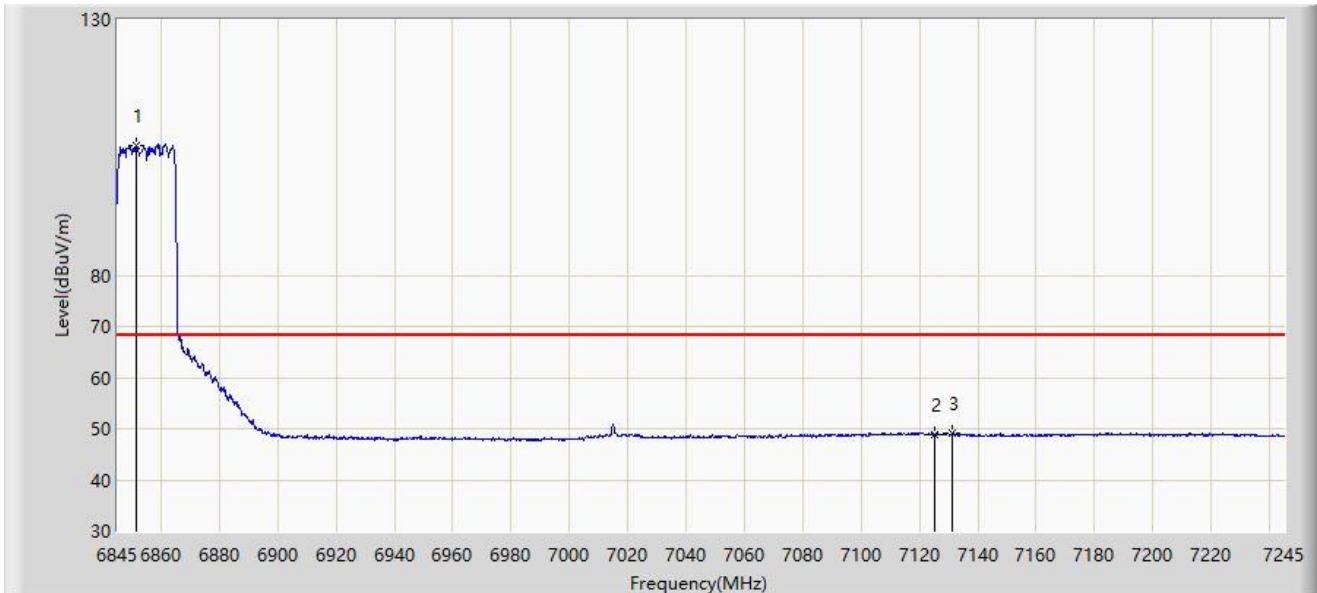


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		6851.400	105.391	98.742	N/A	N/A	6.650	AV
2		7125.000	48.934	40.870	-19.266	68.200	8.064	AV
3	*	7131.400	49.086	41.074	-19.114	68.200	8.012	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 6125MHz	

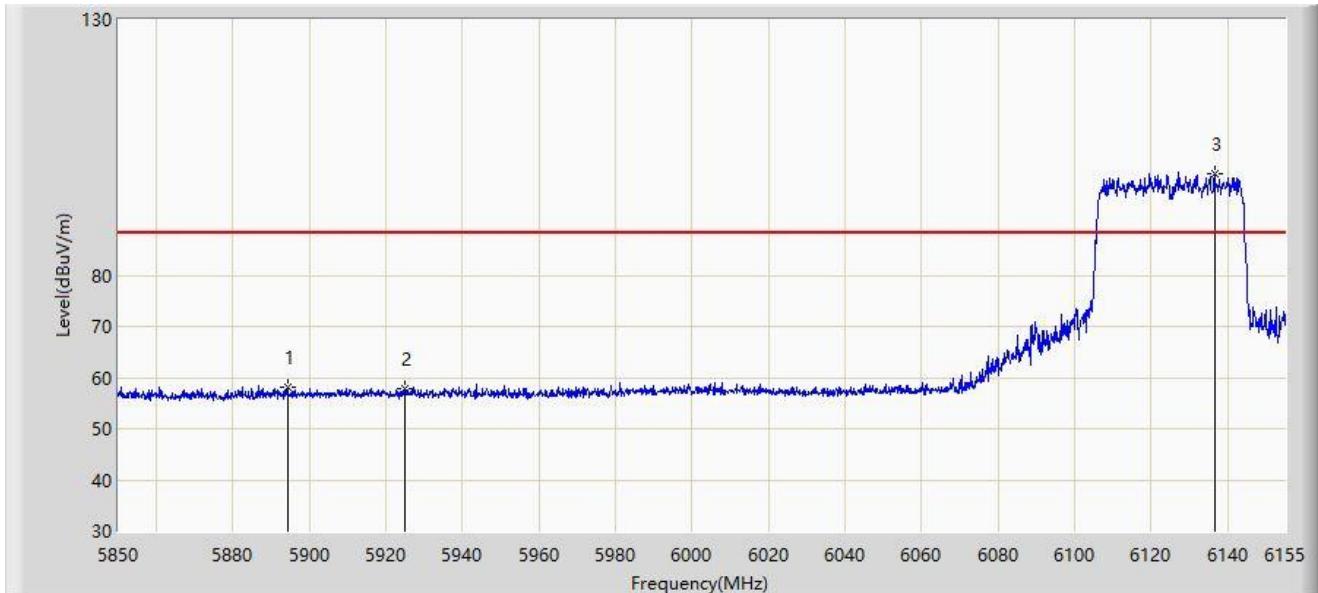


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5894.225	58.167	53.644	-30.033	88.200	4.523	PK
2		5925.000	57.857	53.226	-30.343	88.200	4.631	PK
3		6136.547	99.800	95.049	N/A	N/A	4.750	PK

Note 1: "\*" means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 6125MHz	

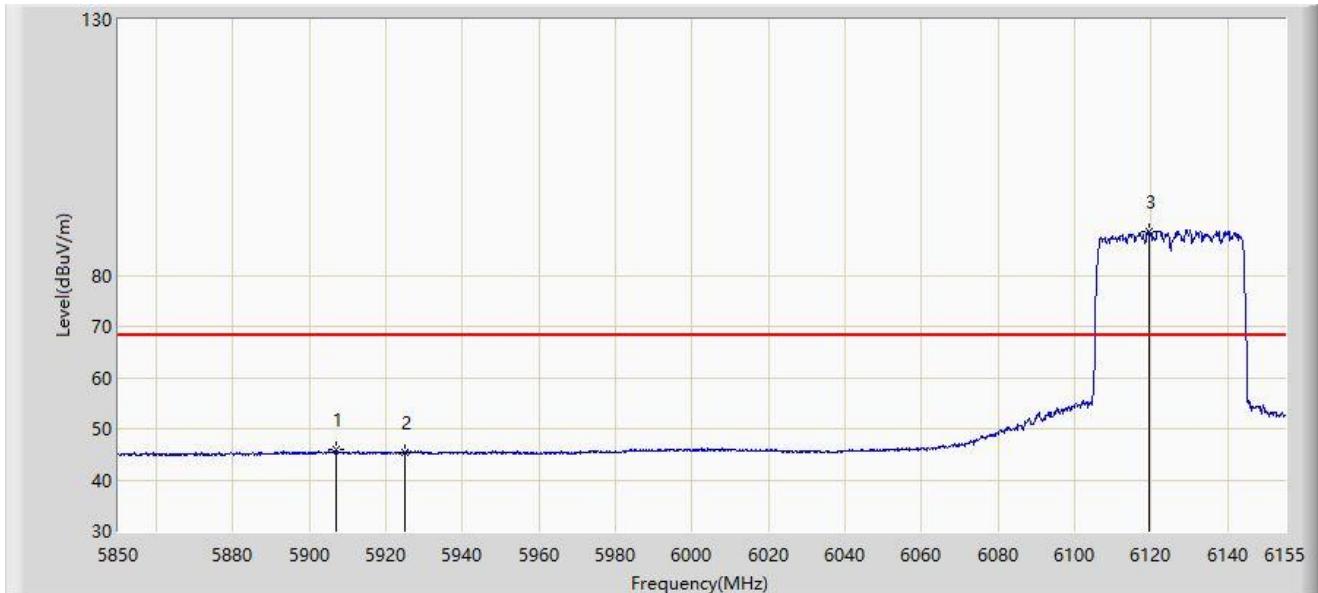


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5907.035	45.902	41.254	-22.298	68.200	4.648	AV
2		5925.000	45.439	40.808	-22.761	68.200	4.631	AV
3		6119.467	88.546	83.653	N/A	N/A	4.894	AV

Note 1: "\*" means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 6125MHz	

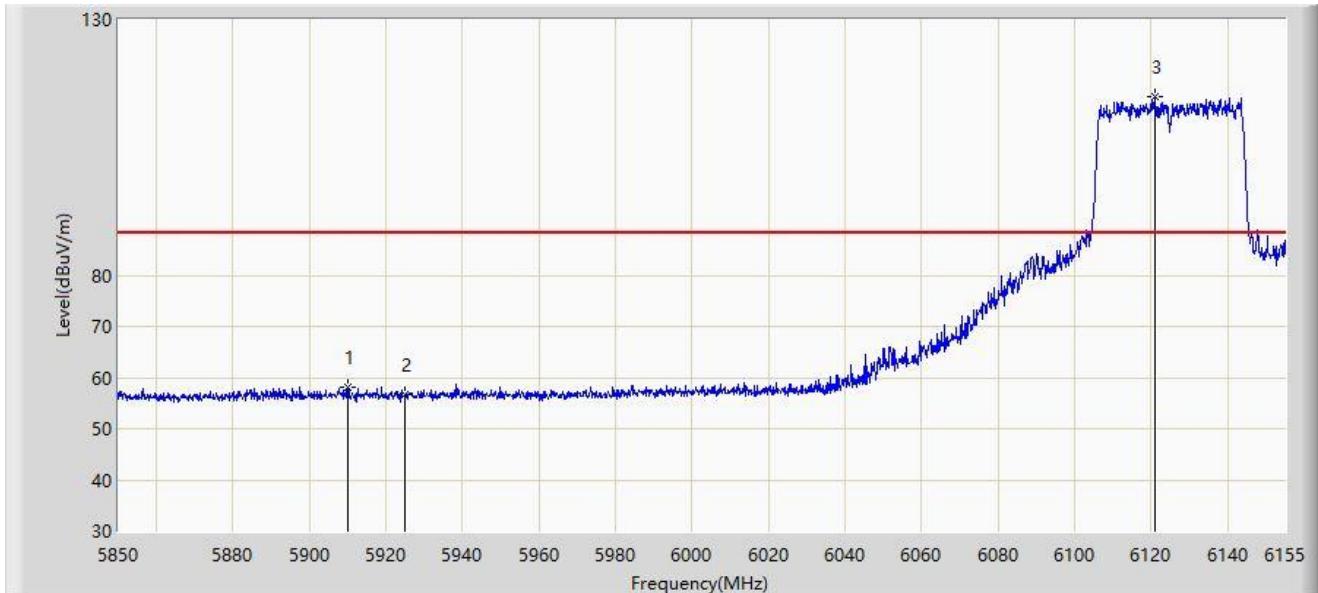


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5909.933	58.114	53.466	-30.086	88.200	4.648	PK
2		5925.000	56.628	51.997	-31.572	88.200	4.631	PK
3		6120.840	114.835	109.960	N/A	N/A	4.876	PK

Note 1: "\*" means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 6125MHz	

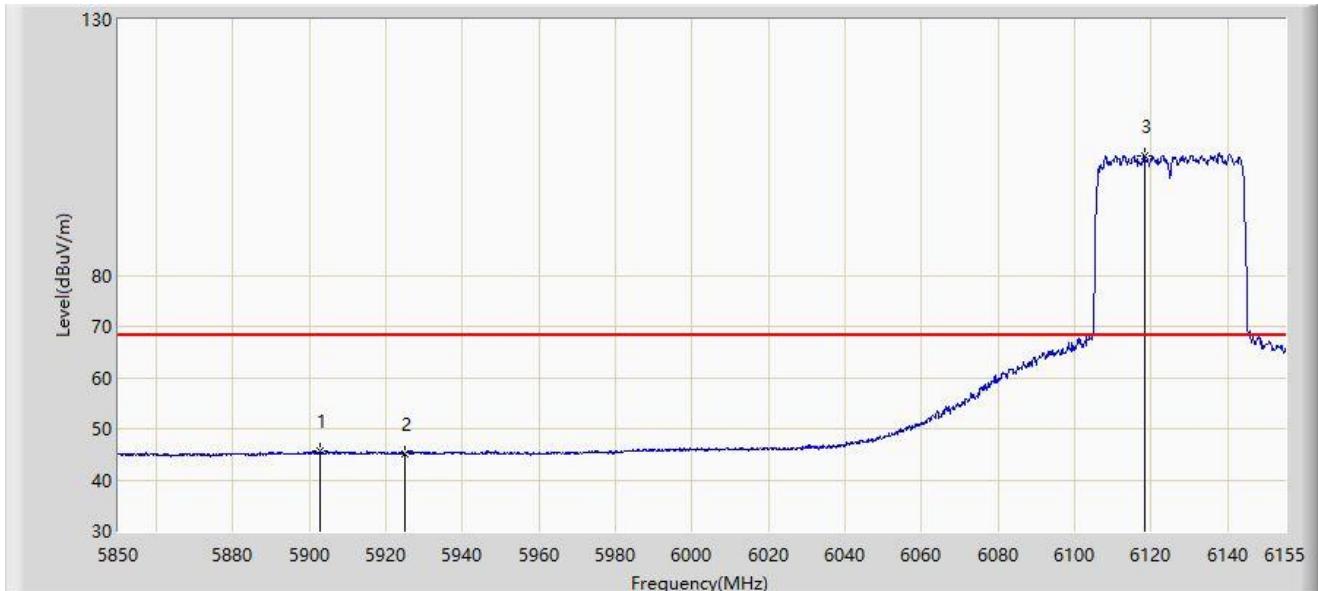


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5902.917	45.518	40.903	-22.682	68.200	4.614	AV
2		5925.000	45.187	40.556	-23.013	68.200	4.631	AV
3		6118.248	103.470	98.561	N/A	N/A	4.909	AV

Note 1: "\*" means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 6845MHz	

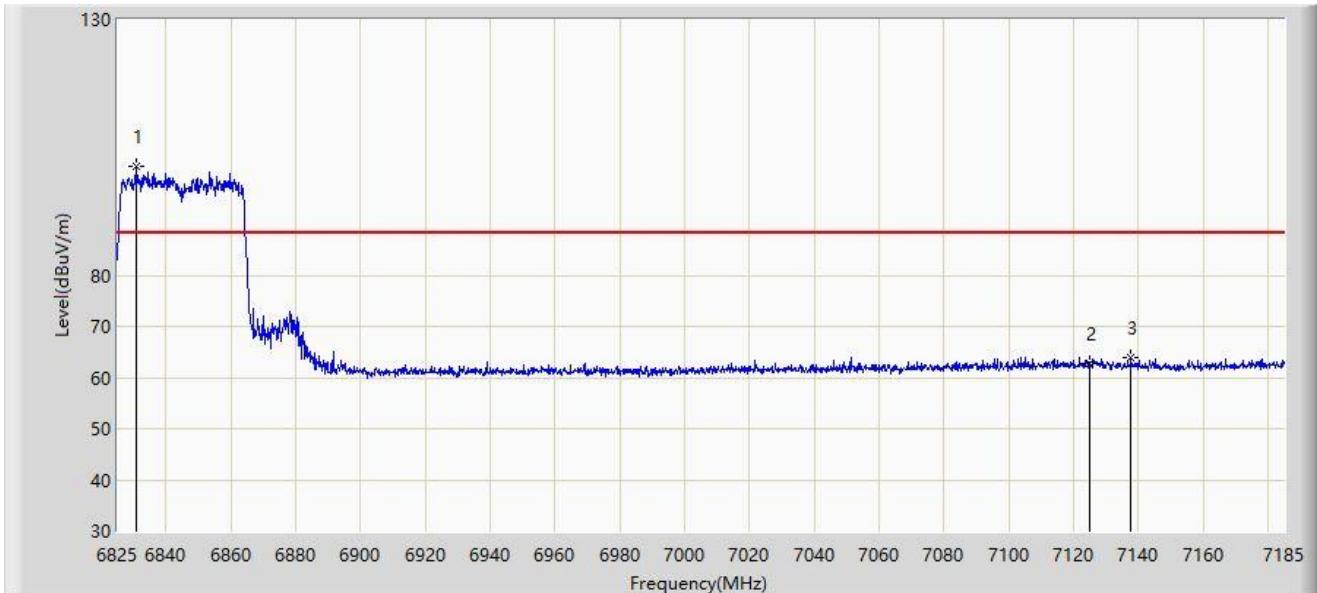


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		6830.760	101.273	94.772	N/A	N/A	6.501	PK
2		7125.000	62.709	54.645	-25.491	88.200	8.064	PK
3	*	7137.660	63.935	55.975	-24.265	88.200	7.960	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 6845MHz	

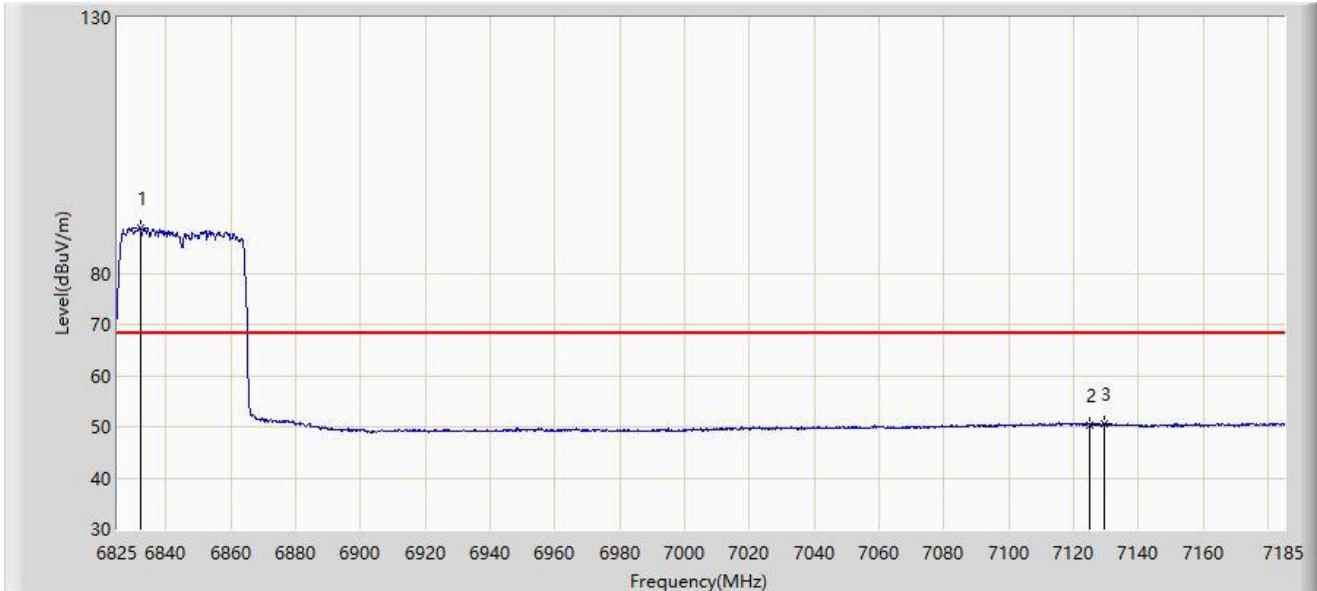


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		6832.020	88.951	82.446	N/A	N/A	6.505	AV
2		7125.000	50.417	42.353	-17.783	68.200	8.064	AV
3	*	7129.560	50.633	42.603	-17.567	68.200	8.030	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 6845MHz	

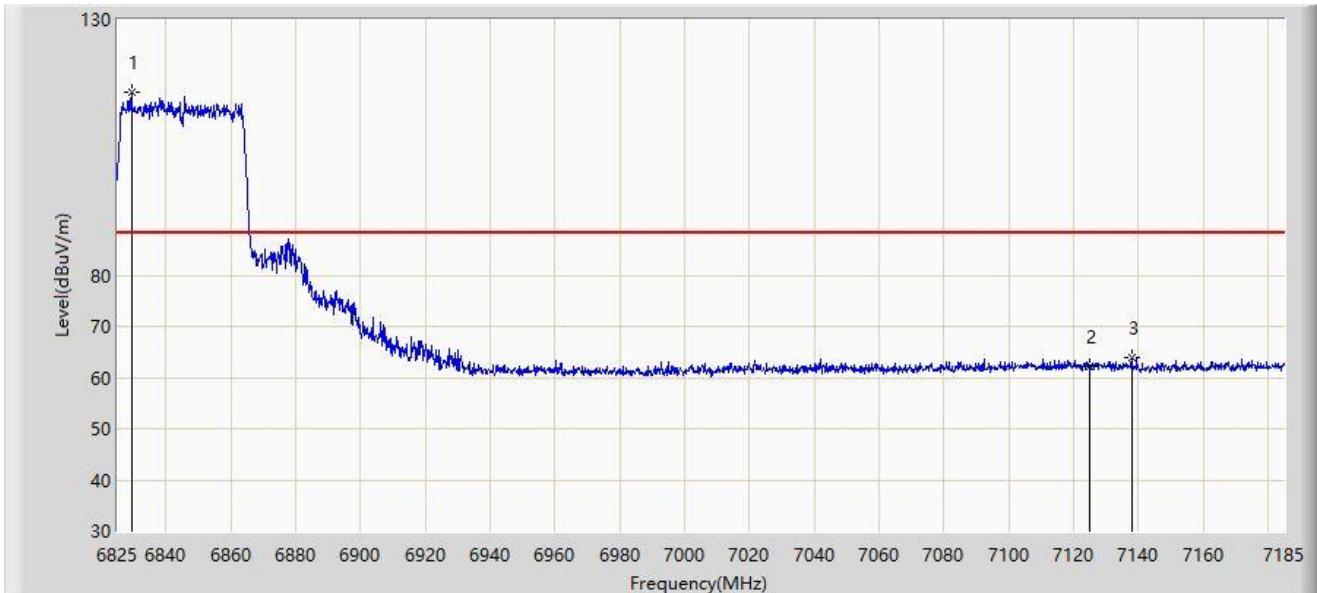


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		6829.320	115.815	109.313	N/A	N/A	6.502	PK
2		7125.000	62.236	54.172	-25.964	88.200	8.064	PK
3	*	7138.020	63.813	55.853	-24.387	88.200	7.960	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 6845MHz	

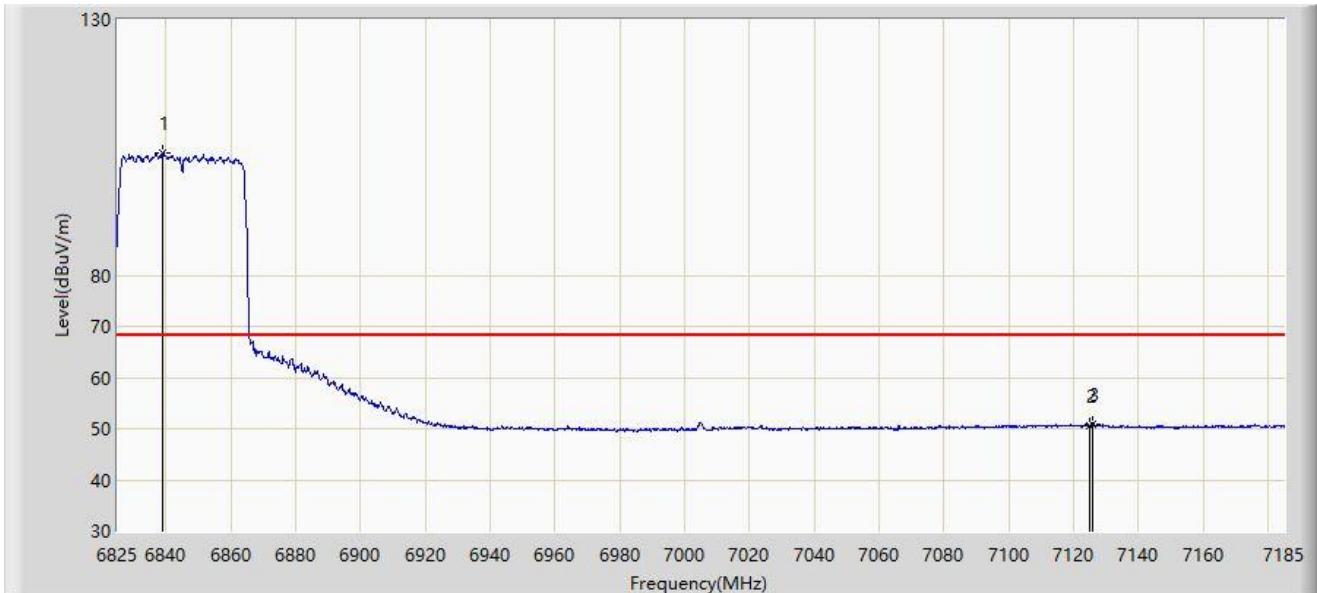


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		6839.040	103.838	97.305	N/A	N/A	6.533	AV
2		7125.000	50.596	42.532	-17.604	68.200	8.064	AV
3	*	7125.960	50.816	42.758	-17.384	68.200	8.058	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 6145MHz	

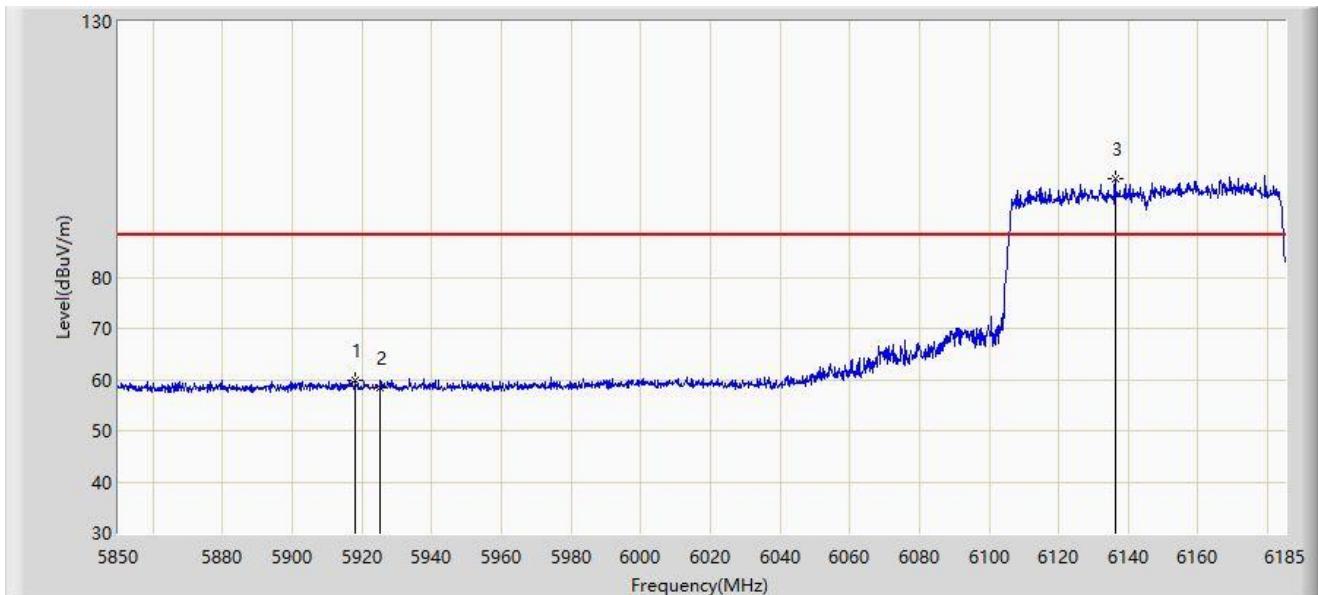


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5918.172	59.722	55.082	-28.478	88.200	4.639	PK
2		5925.000	58.436	53.805	-29.764	88.200	4.631	PK
3		6136.257	99.153	94.407	N/A	N/A	4.746	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 6145MHz	

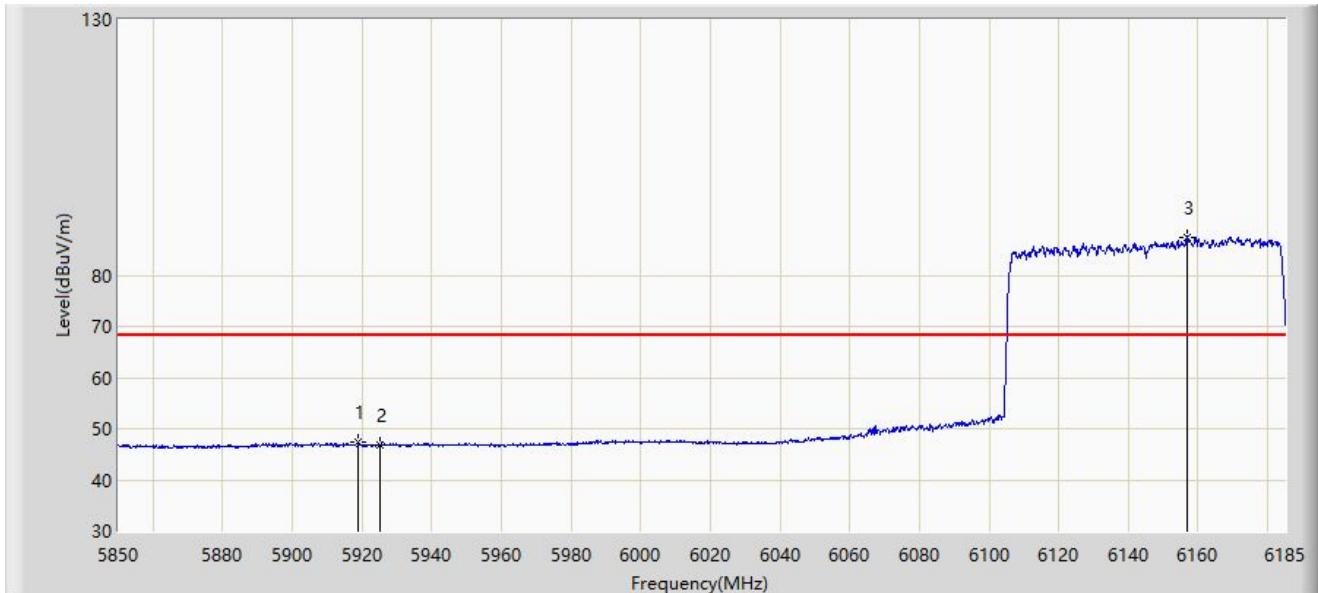


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5919.010	47.283	42.644	-20.917	68.200	4.639	AV
2		5925.000	46.942	42.311	-21.258	68.200	4.631	AV
3		6156.692	87.363	82.137	N/A	N/A	5.226	AV

Note 1: "\*" means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 6145MHz	

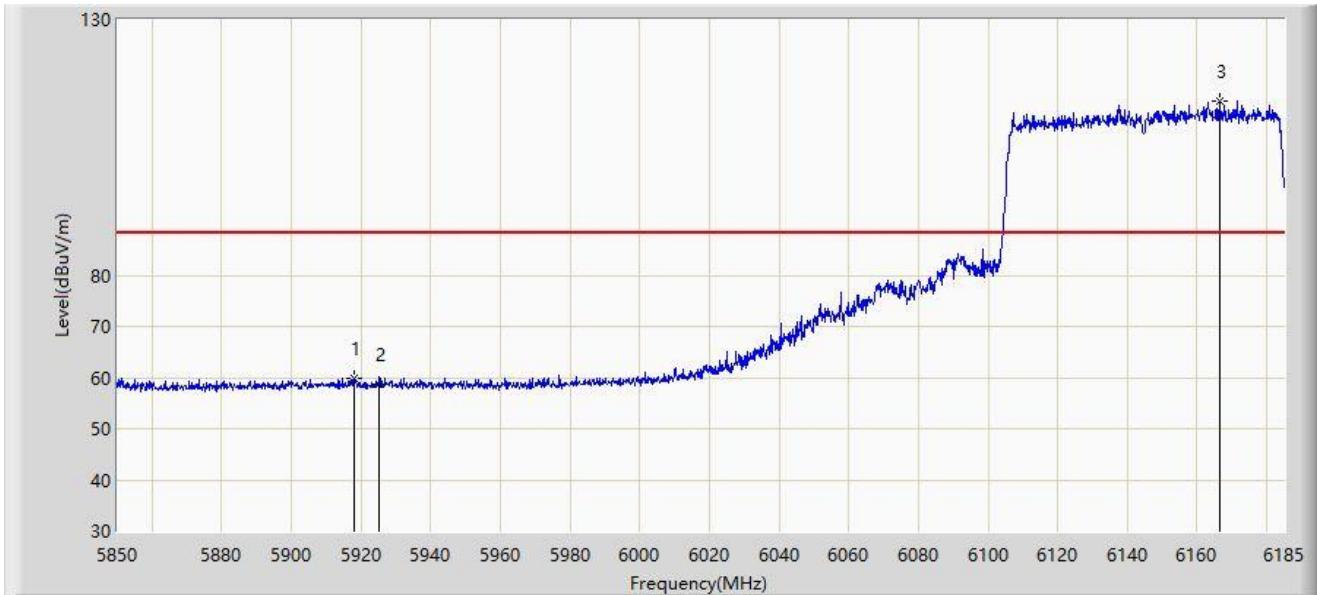


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5918.005	59.986	55.346	-28.214	88.200	4.640	PK
2		5925.000	58.703	54.072	-29.497	88.200	4.631	PK
3		6166.408	114.039	108.703	N/A	N/A	5.336	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 6145MHz	

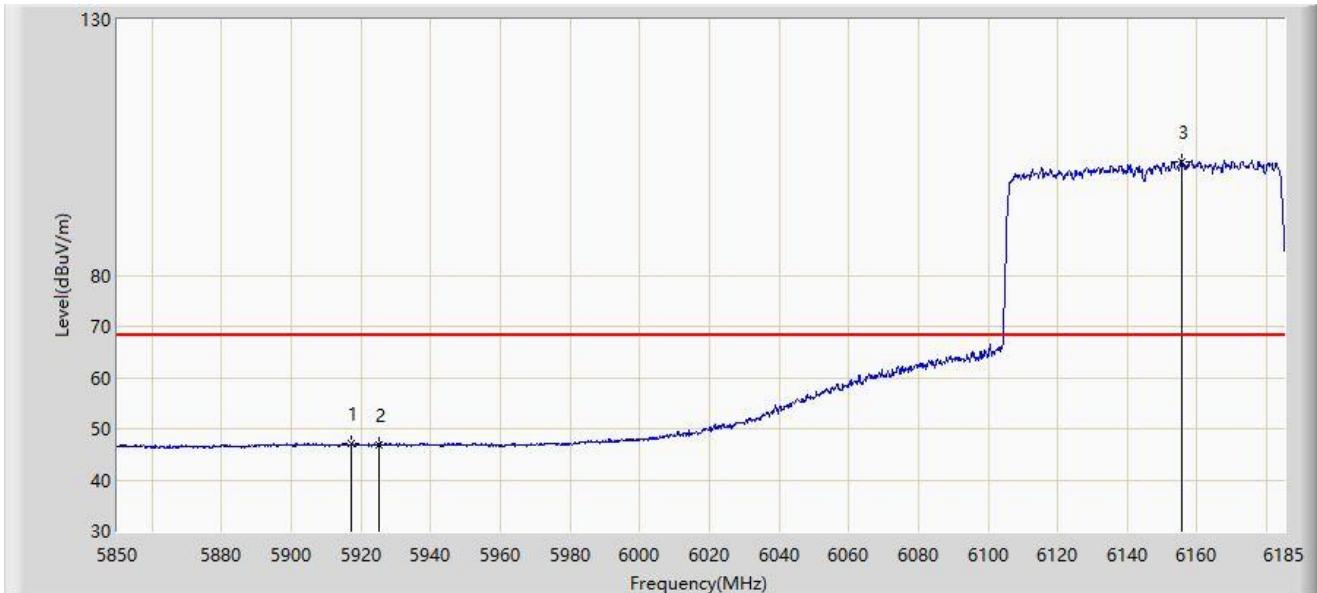


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5917.167	46.978	42.337	-21.222	68.200	4.642	AV
2		5925.000	46.865	42.234	-21.335	68.200	4.631	AV
3		6155.520	102.294	97.095	N/A	N/A	5.200	AV

Note 1: "\*" means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 6785MHz	

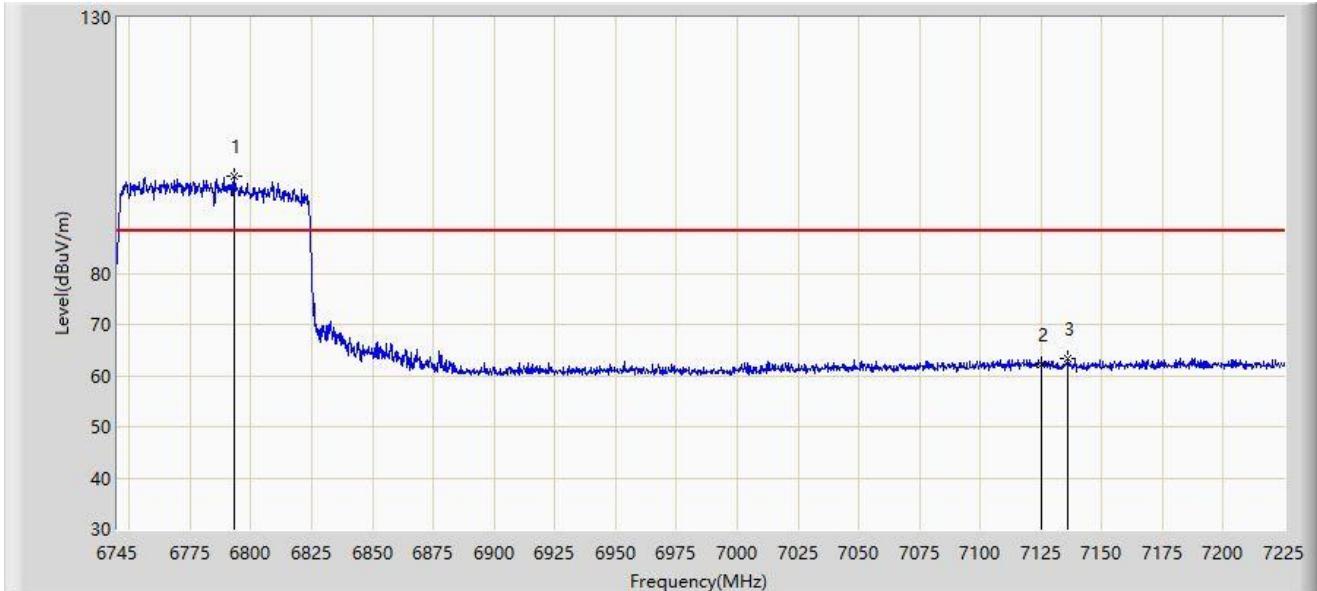


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		6793.240	99.078	92.554	N/A	N/A	6.524	PK
2		7125.000	62.274	54.210	-25.926	88.200	8.064	PK
3	*	7136.200	63.391	55.425	-24.809	88.200	7.966	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 6785MHz	

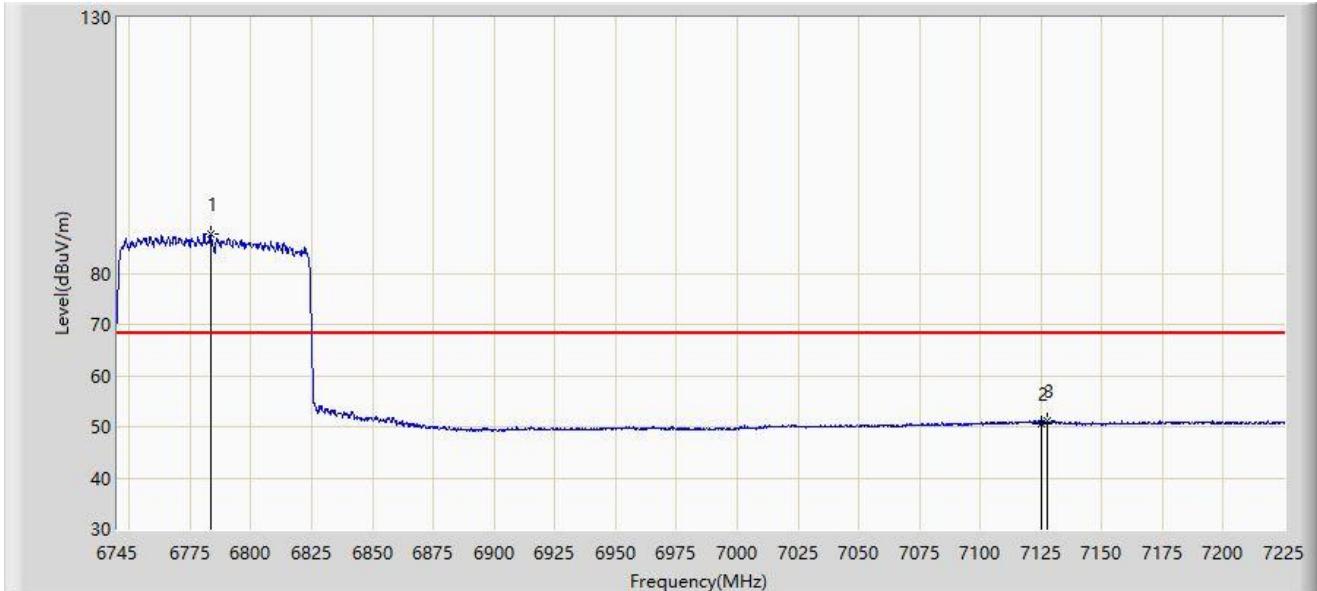


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		6783.640	87.619	81.040	N/A	N/A	6.579	AV
2		7125.000	50.721	42.657	-17.479	68.200	8.064	AV
3	*	7127.320	51.030	42.981	-17.170	68.200	8.048	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 6785MHz	

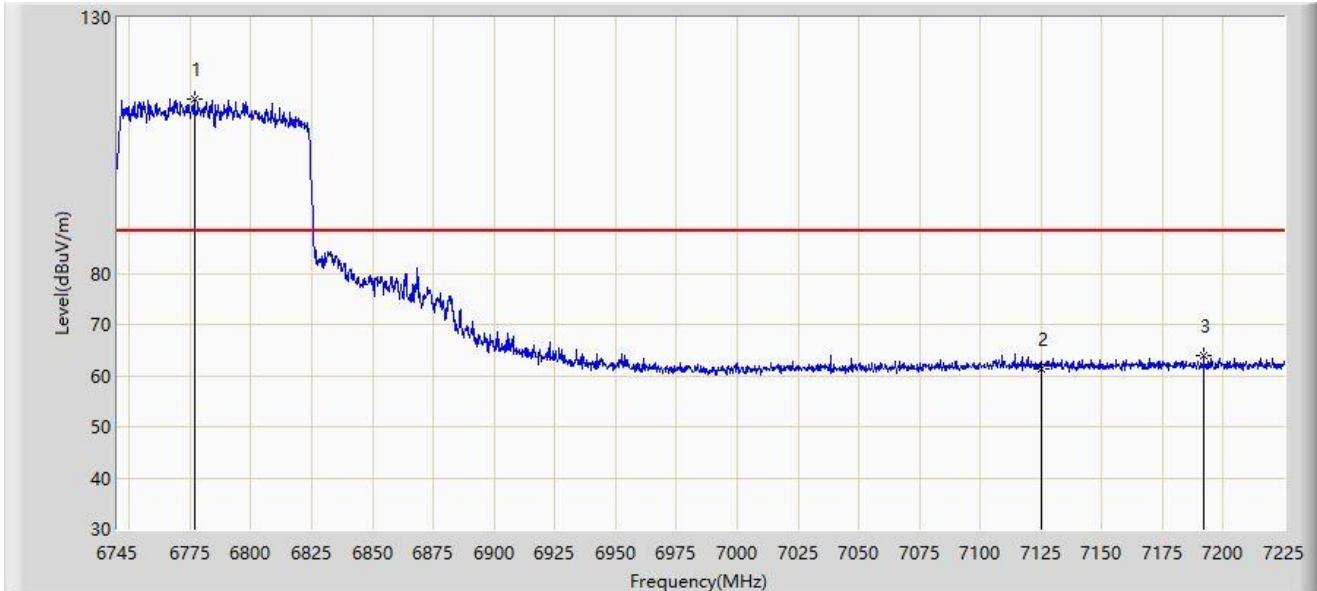

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		6776.680	114.127	107.524	N/A	N/A	6.602	PK
2		7125.000	61.368	53.304	-26.832	88.200	8.064	PK
3	*	7191.880	63.786	55.608	-24.414	88.200	8.178	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz

Test Mode: Transmit by 802.11ax-HE80 at 6785MHz

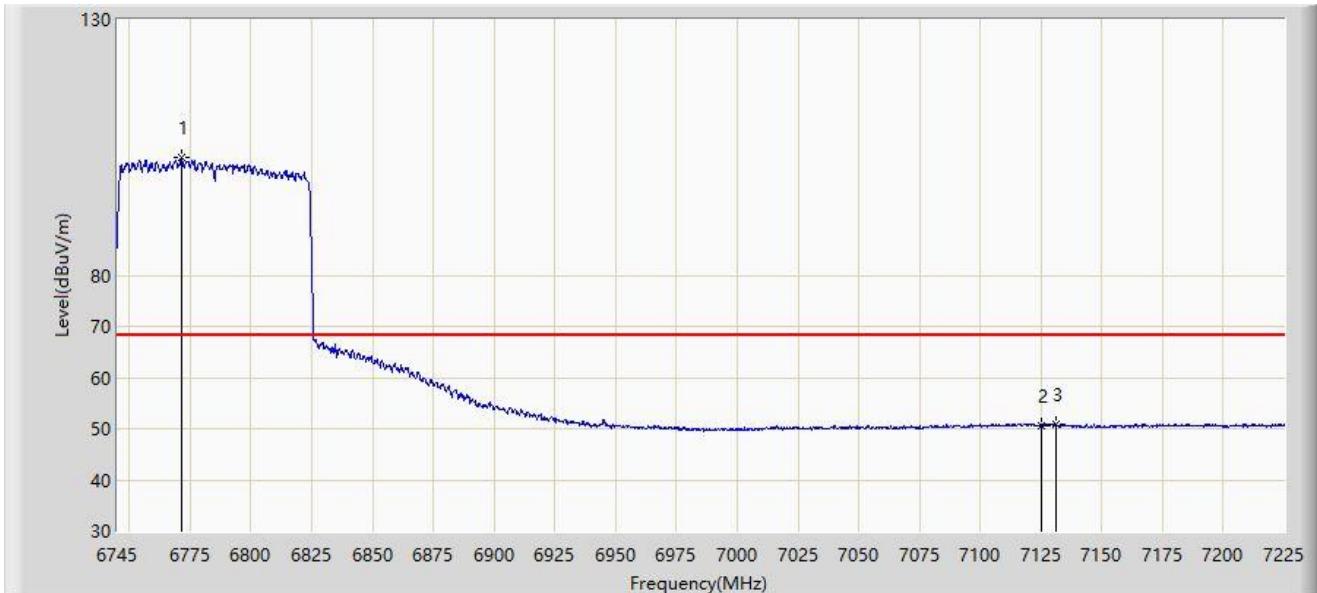


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		6771.400	102.969	96.386	N/A	N/A	6.584	AV
2		7125.000	50.551	42.487	-17.649	68.200	8.064	AV
3	*	7130.920	50.952	42.935	-17.248	68.200	8.016	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6185MHz	

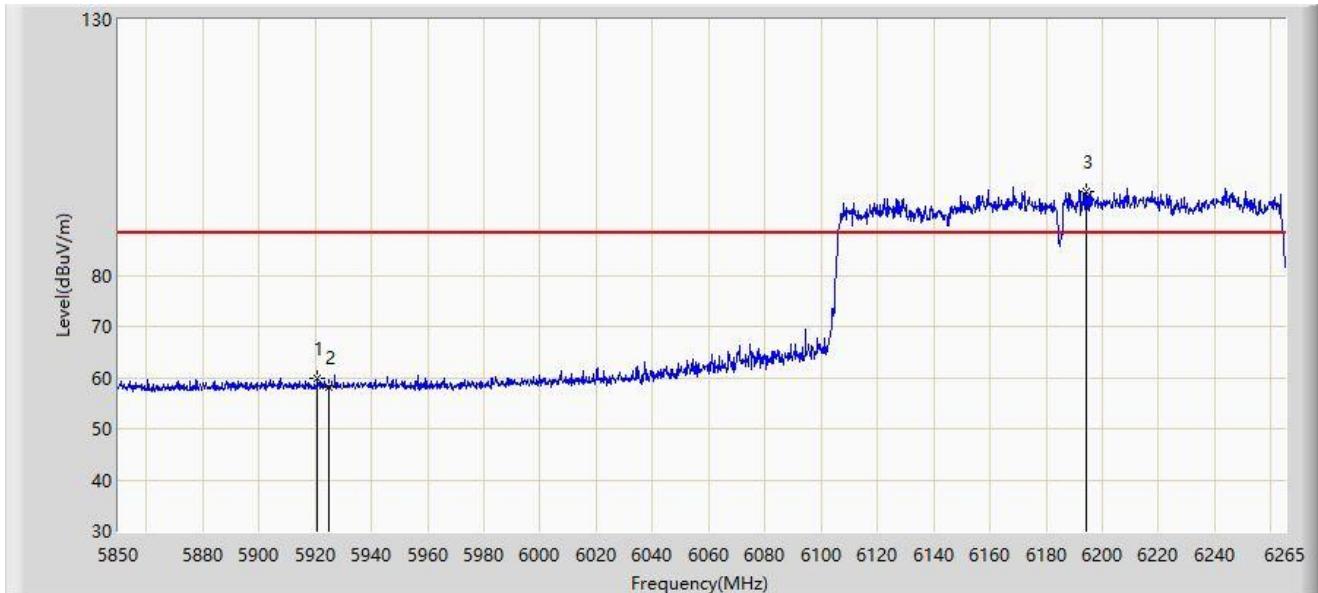


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5920.965	59.736	55.101	-28.464	88.200	4.635	PK
2		5925.000	58.144	53.513	-30.056	88.200	4.631	PK
3		6194.243	96.350	91.151	N/A	N/A	5.198	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6185MHz	

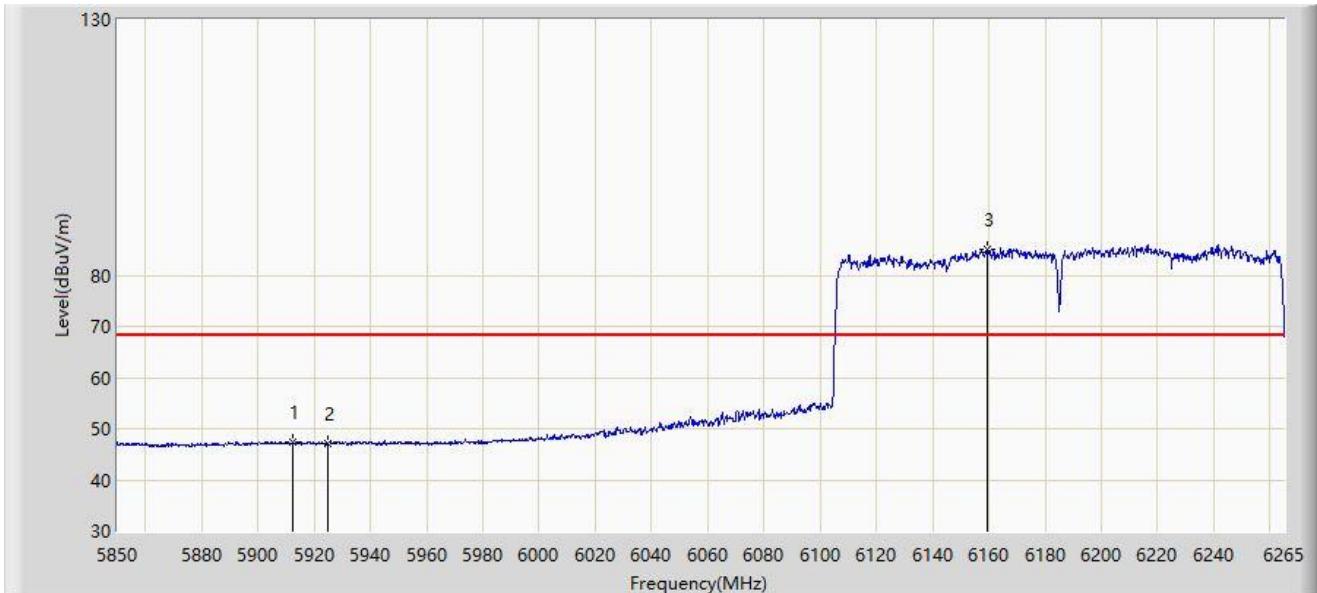


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5912.250	47.277	42.629	-20.923	68.200	4.649	AV
2		5925.000	47.177	42.546	-21.023	68.200	4.631	AV
3		6159.382	85.134	79.867	N/A	N/A	5.267	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6185MHz	

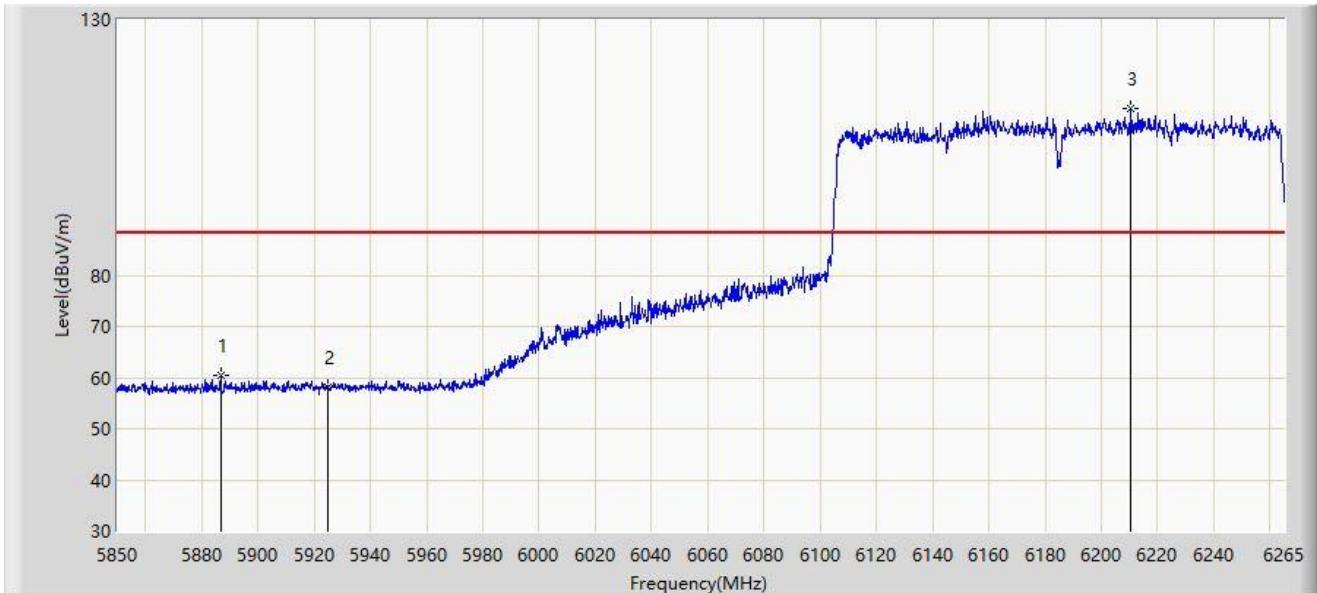


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5886.728	60.363	55.908	-27.837	88.200	4.455	PK
2		5925.000	58.053	53.422	-30.147	88.200	4.631	PK
3		6210.635	112.711	107.474	N/A	N/A	5.237	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6185MHz	

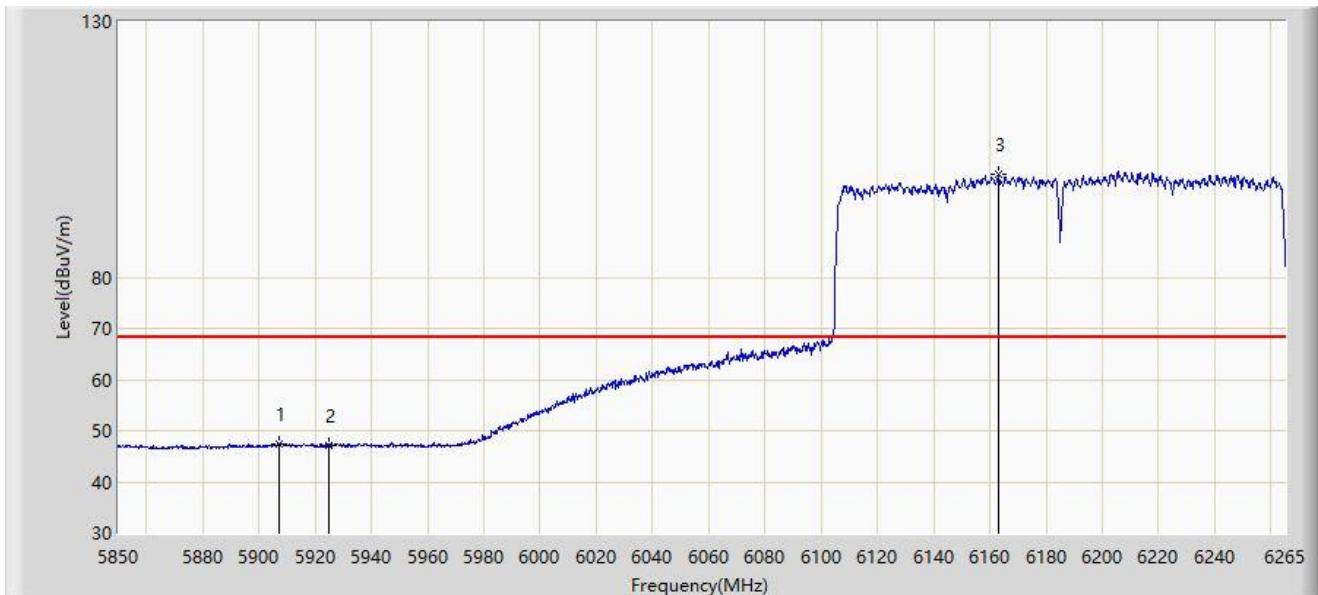


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5907.270	47.486	42.838	-20.714	68.200	4.648	AV
2		5925.000	47.208	42.577	-20.992	68.200	4.631	AV
3		6163.118	100.099	94.795	N/A	N/A	5.303	AV

Note 1: "\*" means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6665MHz	

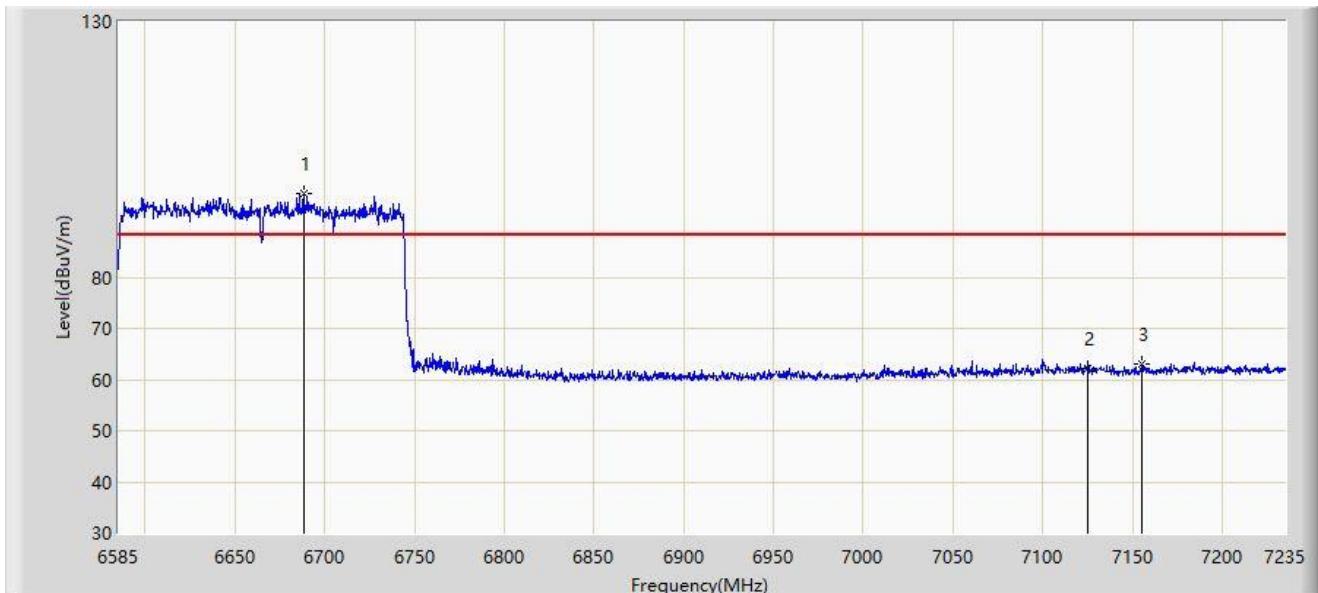


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		6688.350	96.234	89.799	N/A	N/A	6.434	PK
2		7125.000	62.312	54.248	-25.888	88.200	8.064	PK
3	*	7155.375	62.956	54.969	-25.244	88.200	7.987	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6665MHz	

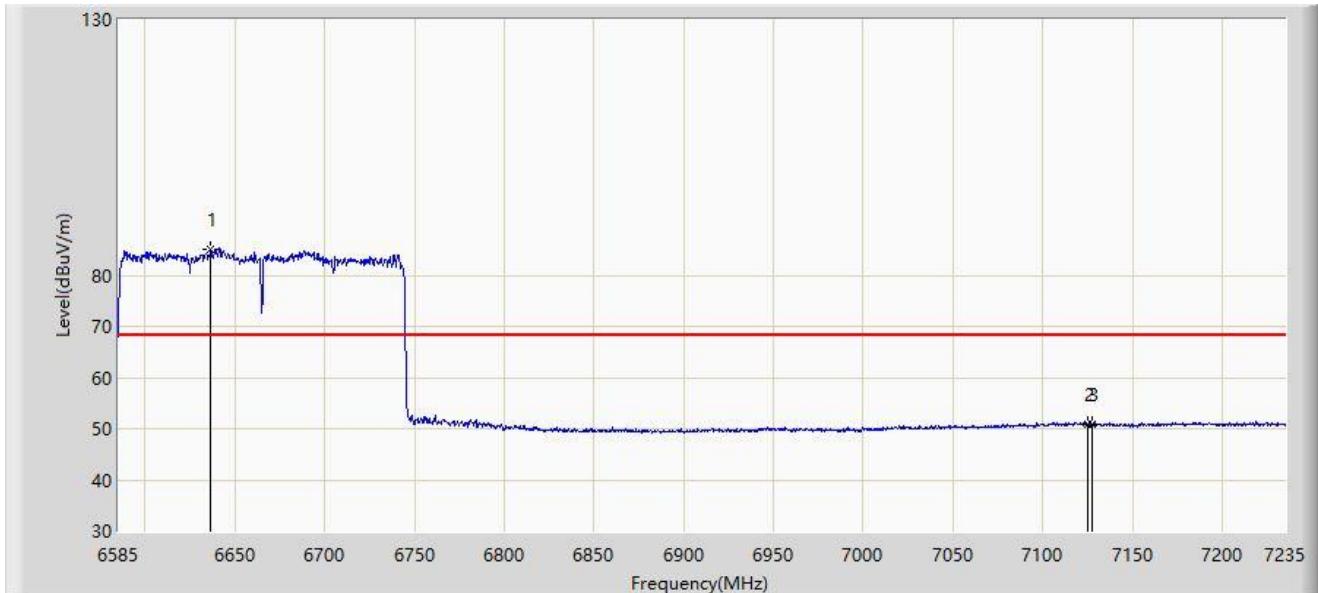


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		6636.675	85.161	78.884	N/A	N/A	6.276	AV
2		7125.000	50.909	42.845	-17.291	68.200	8.064	AV
3	*	7127.750	50.979	42.933	-17.221	68.200	8.045	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6665MHz	

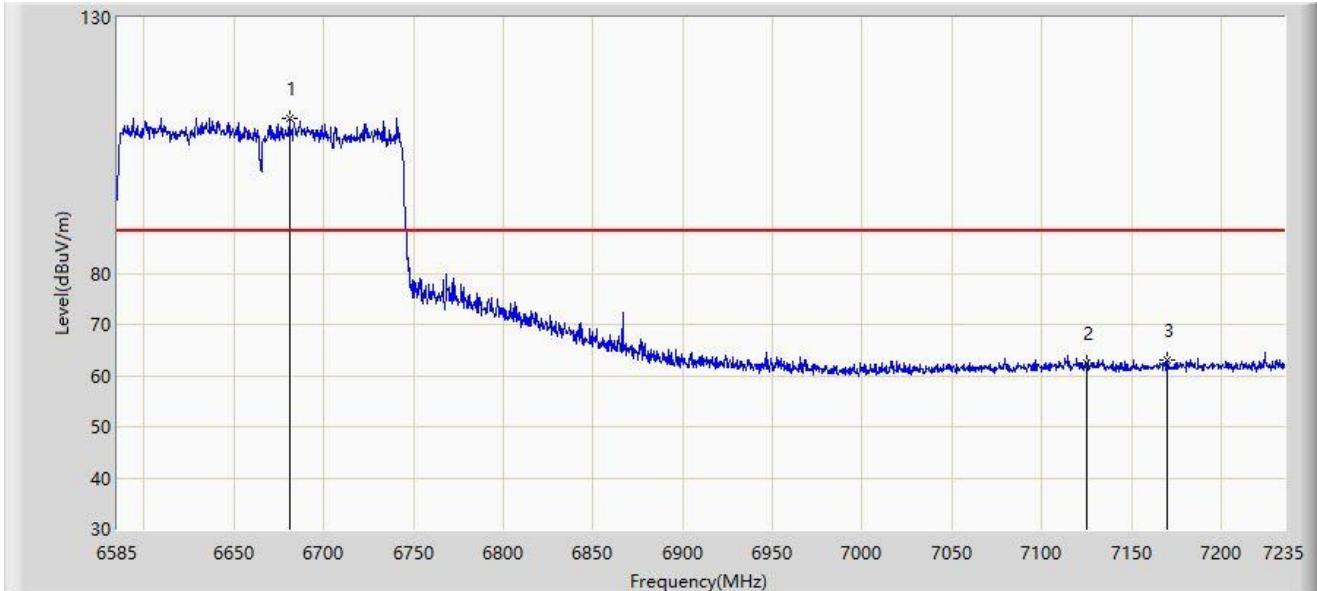


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		6680.875	110.152	103.684	N/A	N/A	6.468	PK
2		7125.000	62.494	54.430	-25.706	88.200	8.064	PK
3	*	7169.675	63.090	55.067	-25.110	88.200	8.023	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6665MHz	

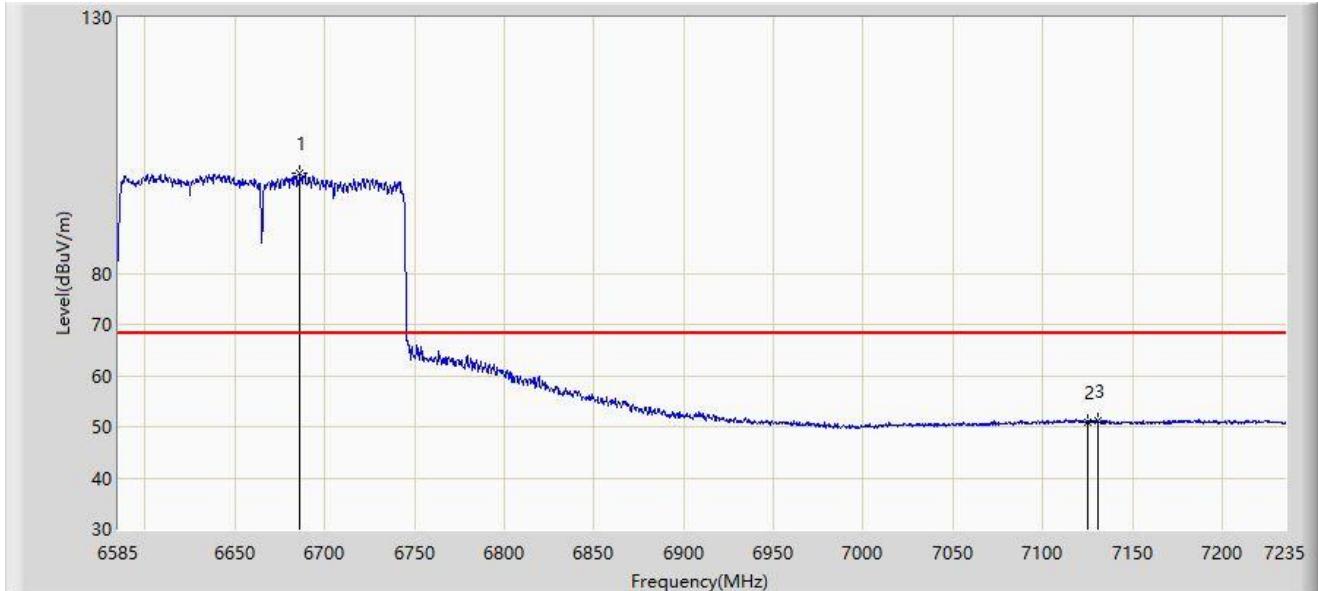


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		6686.400	99.493	93.050	N/A	N/A	6.443	AV
2		7125.000	50.989	42.925	-17.211	68.200	8.064	AV
3	*	7130.675	51.291	43.272	-16.909	68.200	8.018	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 6115MHz	

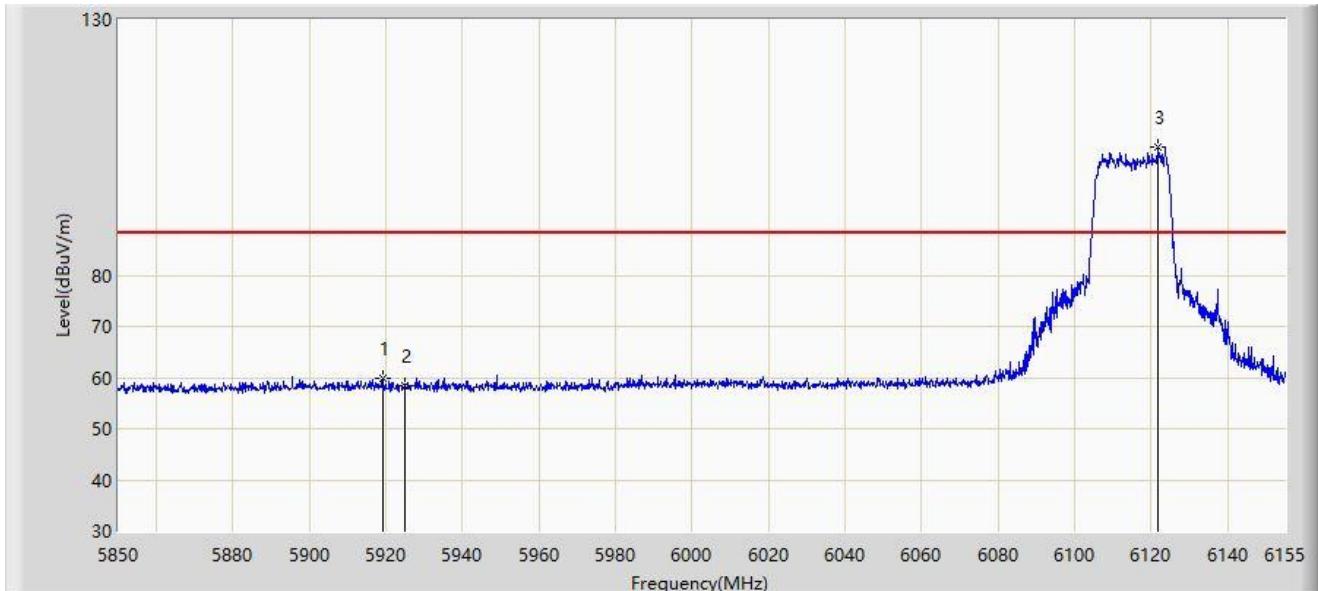


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5919.083	59.885	55.247	-28.315	88.200	4.639	PK
2		5925.000	58.316	53.685	-29.884	88.200	4.631	PK
3		6121.908	104.956	100.095	N/A	N/A	4.861	PK

Note 1: "\*" means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 6115MHz	

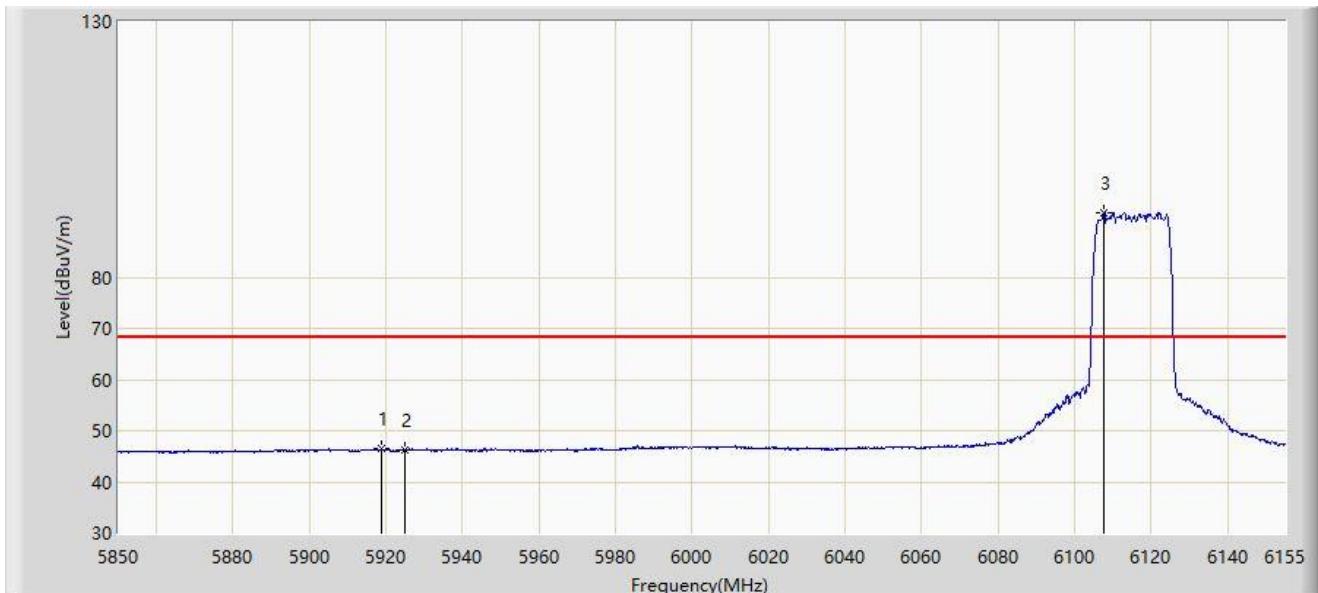


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5918.777	46.393	41.754	-21.807	68.200	4.638	AV
2		5925.000	46.148	41.517	-22.052	68.200	4.631	AV
3		6107.572	92.674	87.642	N/A	N/A	5.032	AV

Note 1: "\*" means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 6115MHz	

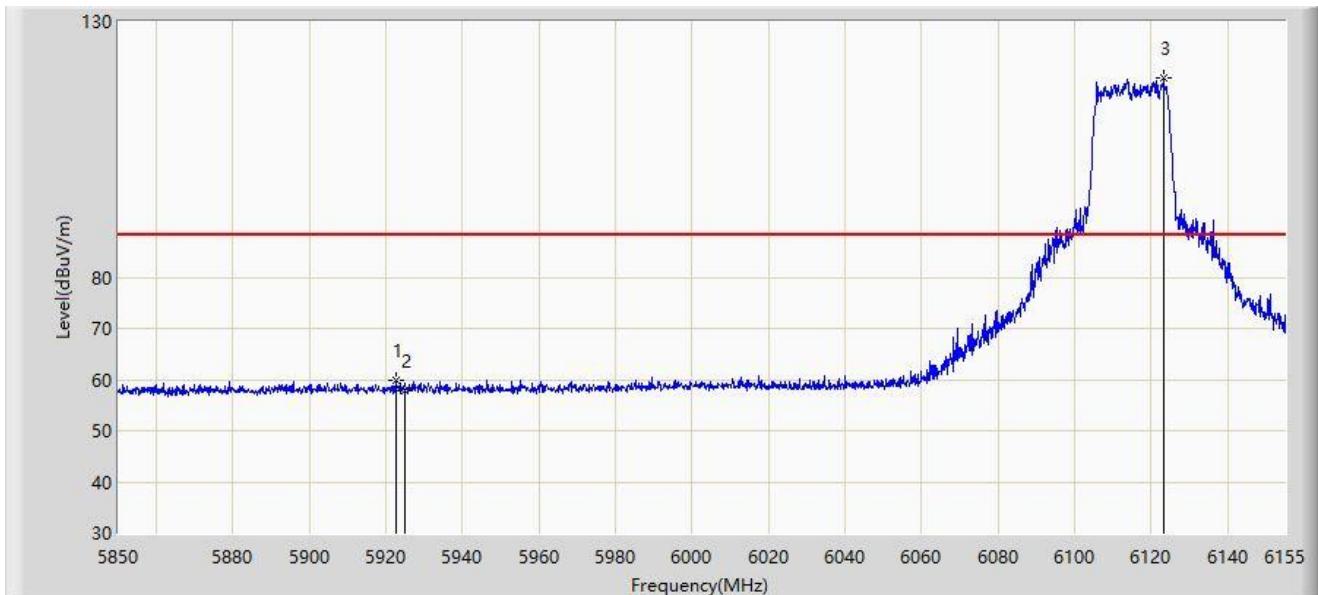


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5922.437	59.736	55.103	-28.464	88.200	4.634	PK
2		5925.000	57.725	53.094	-30.475	88.200	4.631	PK
3		6123.280	119.014	114.170	N/A	N/A	4.843	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 6115MHz	

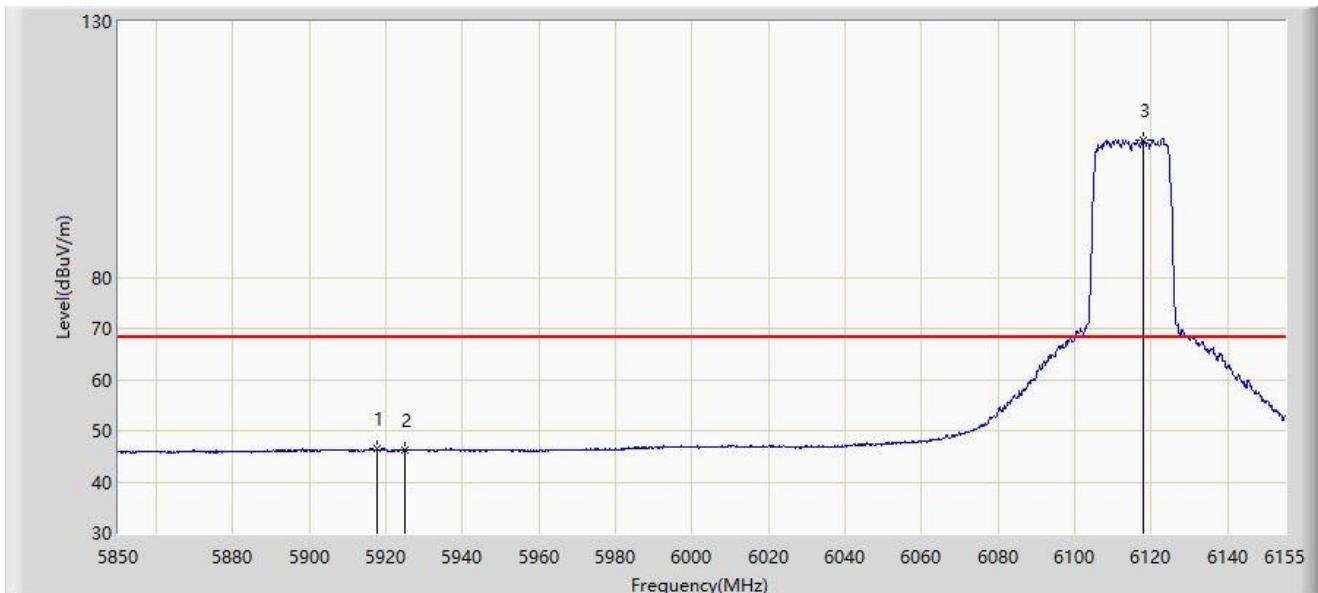


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5917.710	46.435	41.794	-21.765	68.200	4.641	AV
2		5925.000	46.180	41.549	-22.020	68.200	4.631	AV
3		6117.942	106.922	102.009	N/A	N/A	4.914	AV

Note 1: "\*" means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 6855MHz	

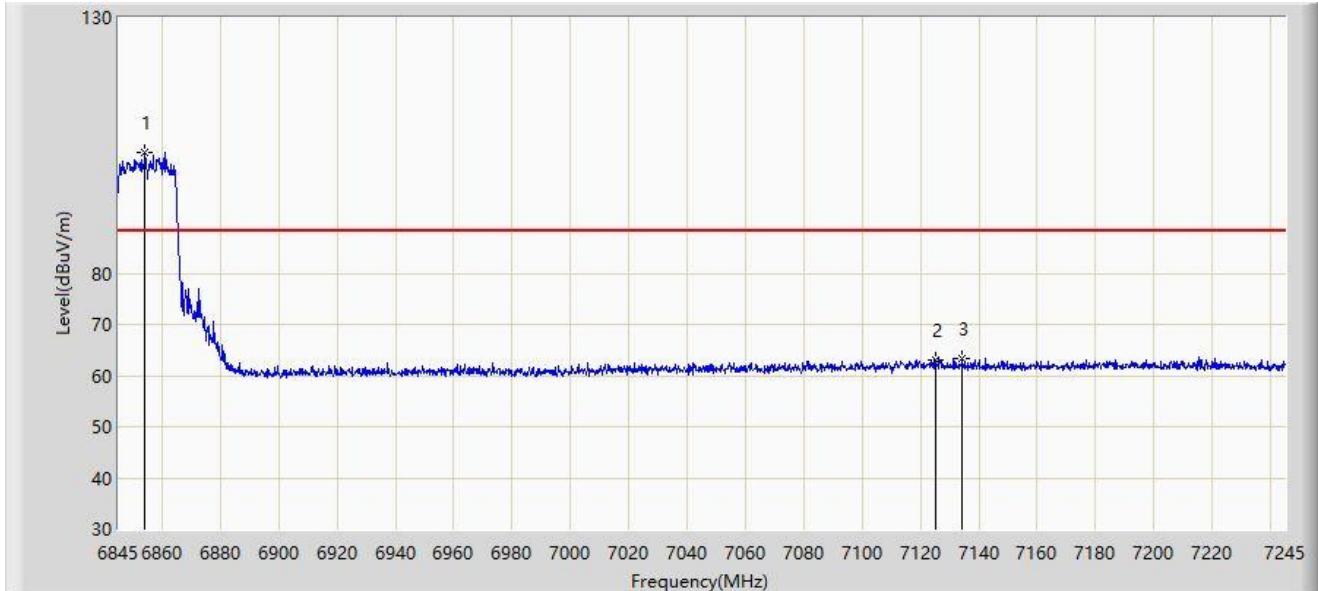


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		6854.000	103.489	96.811	N/A	N/A	6.678	PK
2		7125.000	63.168	55.104	-25.032	88.200	8.064	PK
3	*	7134.200	63.445	55.460	-24.755	88.200	7.985	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 6855MHz	

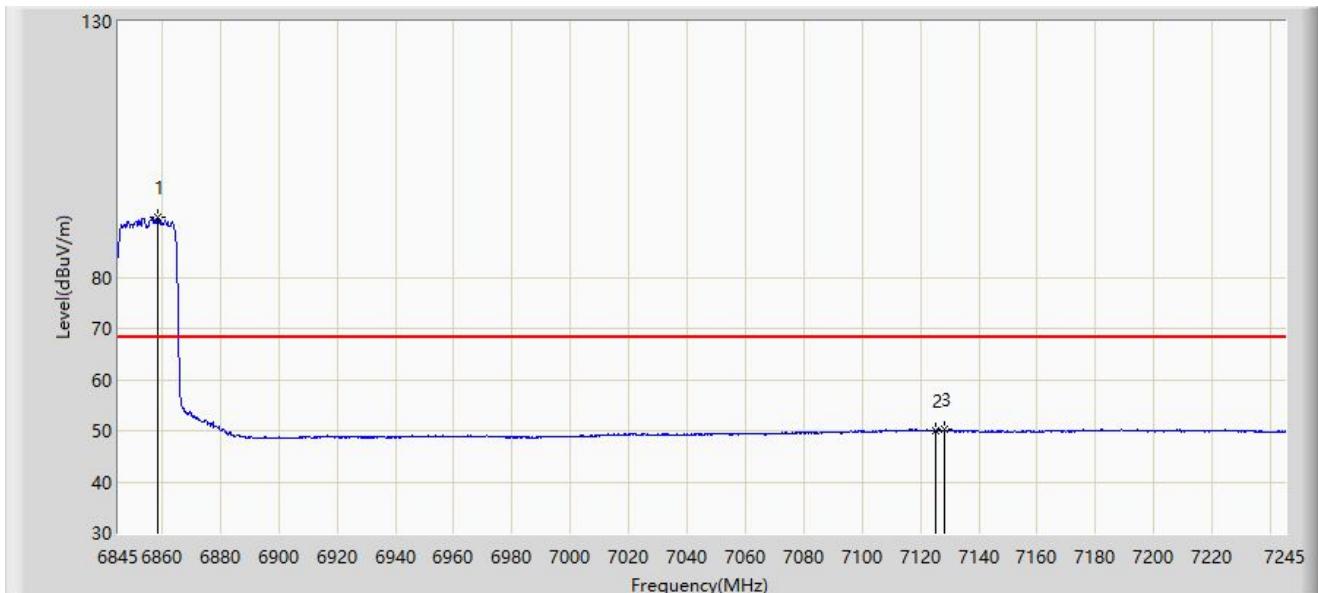


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		6858.600	91.661	84.932	N/A	N/A	6.729	AV
2		7125.000	50.010	41.946	-18.190	68.200	8.064	AV
3	*	7128.200	50.224	42.181	-17.976	68.200	8.043	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 6855MHz	

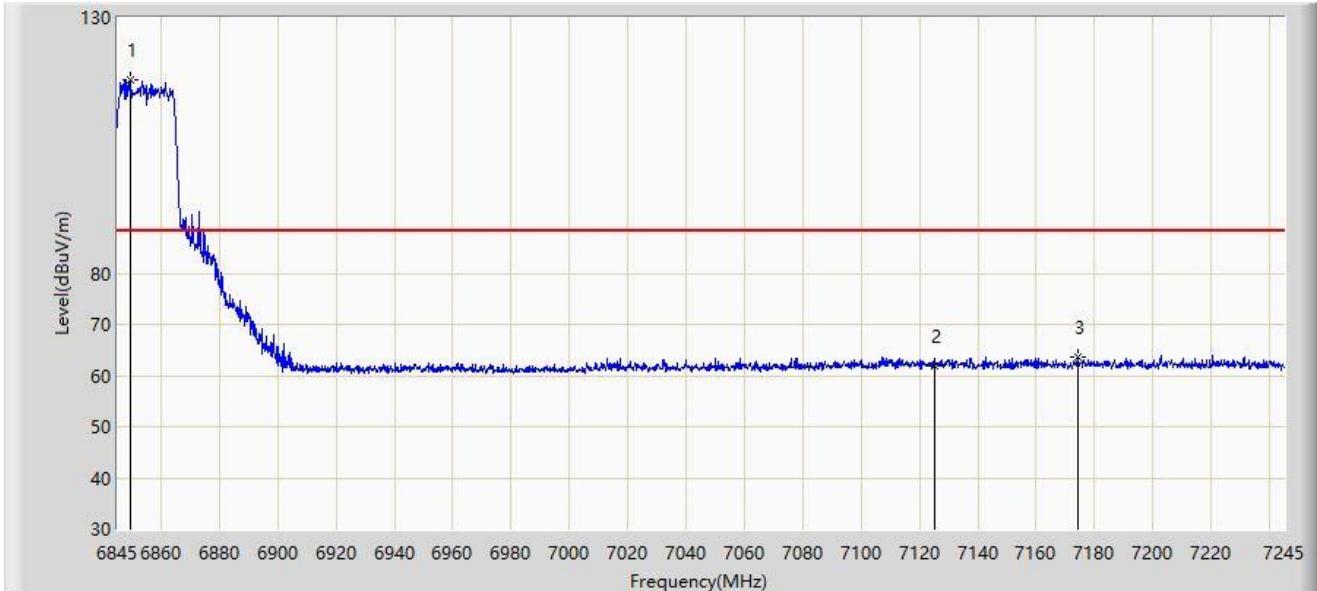


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		6849.400	117.847	111.220	N/A	N/A	6.628	PK
2		7125.000	61.747	53.683	-26.453	88.200	8.064	PK
3	*	7174.200	63.704	55.636	-24.496	88.200	8.067	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 6855MHz	

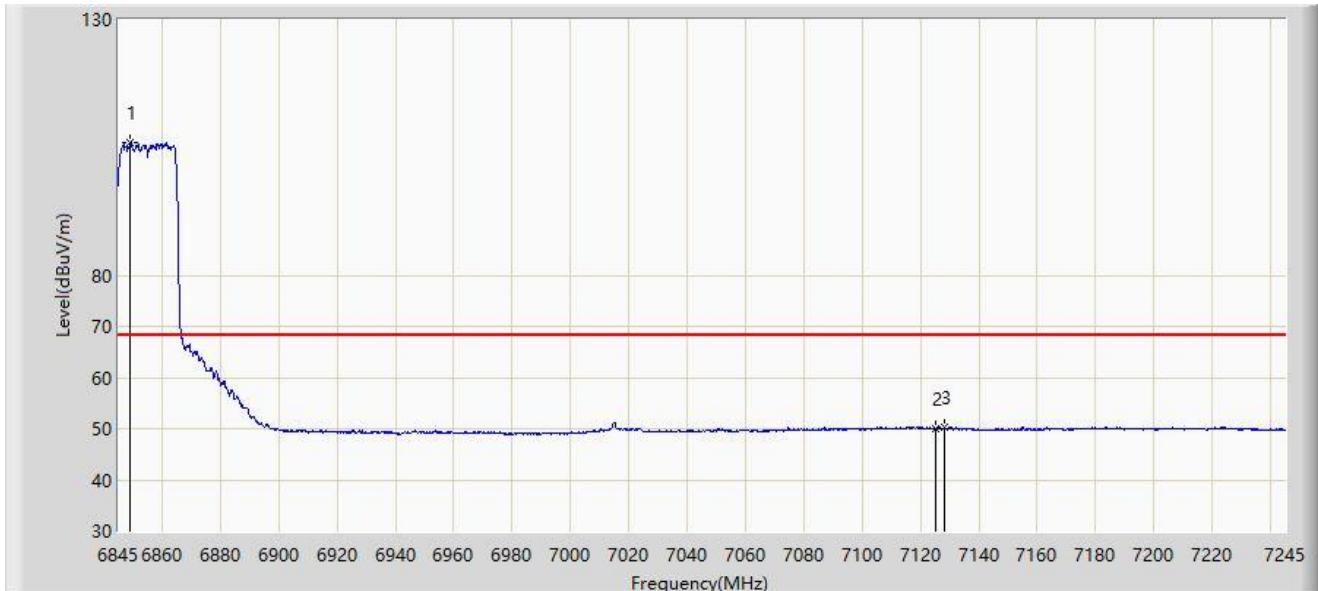


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		6849.000	105.968	99.345	N/A	N/A	6.623	AV
2		7125.000	50.113	42.049	-18.087	68.200	8.064	AV
3	*	7128.000	50.214	42.170	-17.986	68.200	8.044	AV

Note 1: "\*" means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 6125MHz	

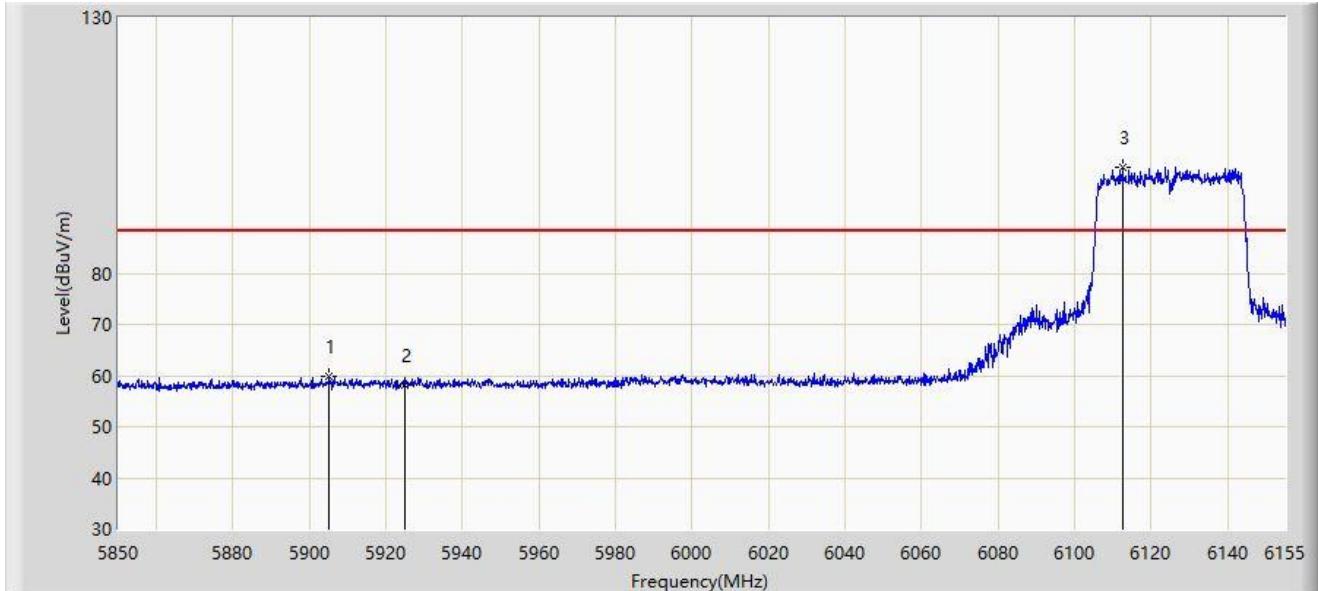


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5905.205	59.880	55.242	-28.320	88.200	4.638	PK
2		5925.000	58.134	53.503	-30.066	88.200	4.631	PK
3		6112.453	100.800	95.823	N/A	N/A	4.977	PK

Note 1: "\*" means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 6125MHz	

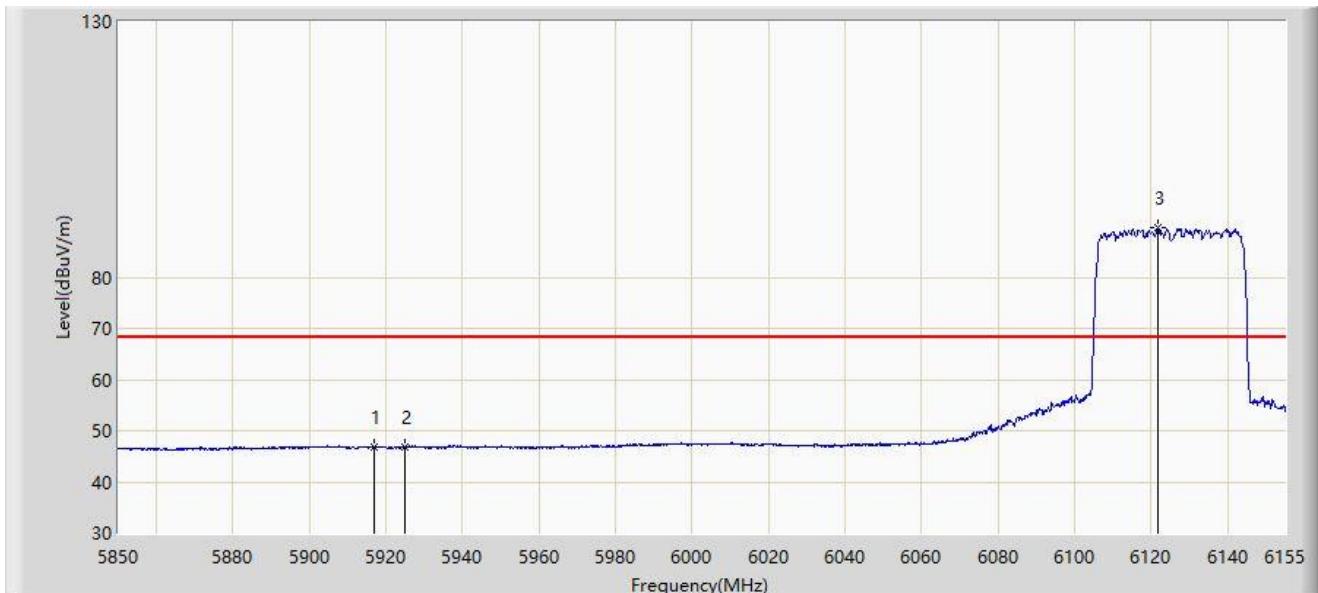


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5916.795	46.951	42.309	-21.249	68.200	4.642	AV
2		5925.000	46.739	42.108	-21.461	68.200	4.631	AV
3		6121.755	89.592	84.729	N/A	N/A	4.863	AV

Note 1: "\*" means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 6125MHz	

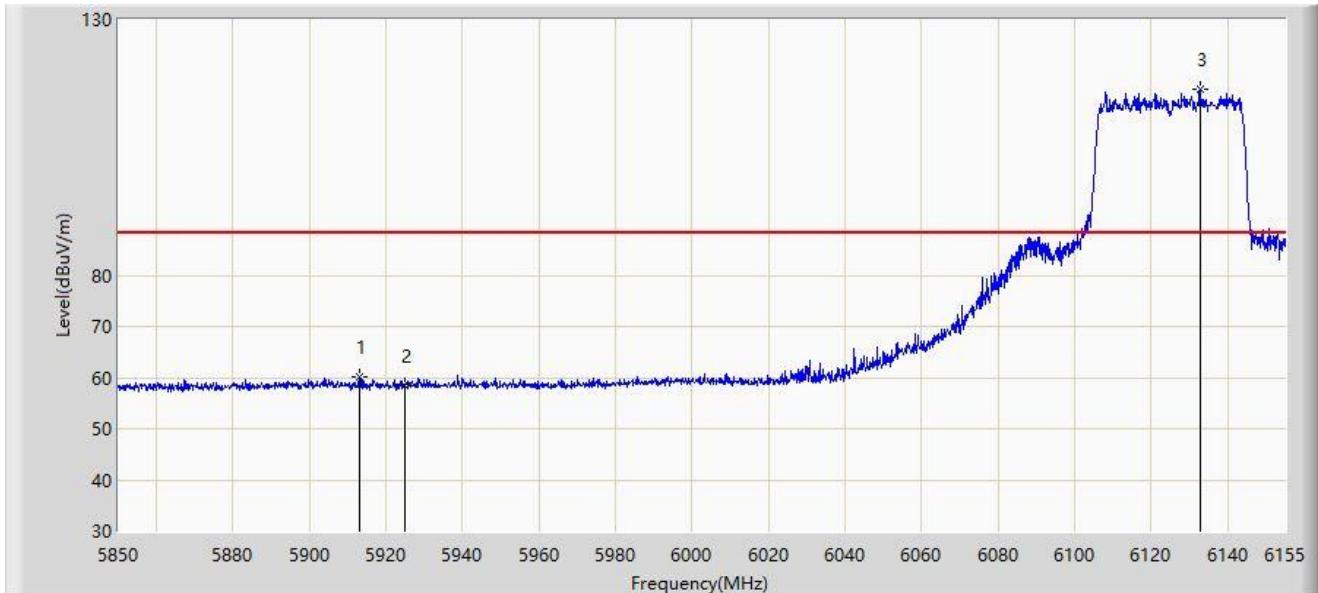


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5913.135	60.220	55.572	-27.980	88.200	4.648	PK
2		5925.000	58.282	53.651	-29.918	88.200	4.631	PK
3		6132.735	116.234	111.509	N/A	N/A	4.725	PK

Note 1: "\*" means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 6125MHz	

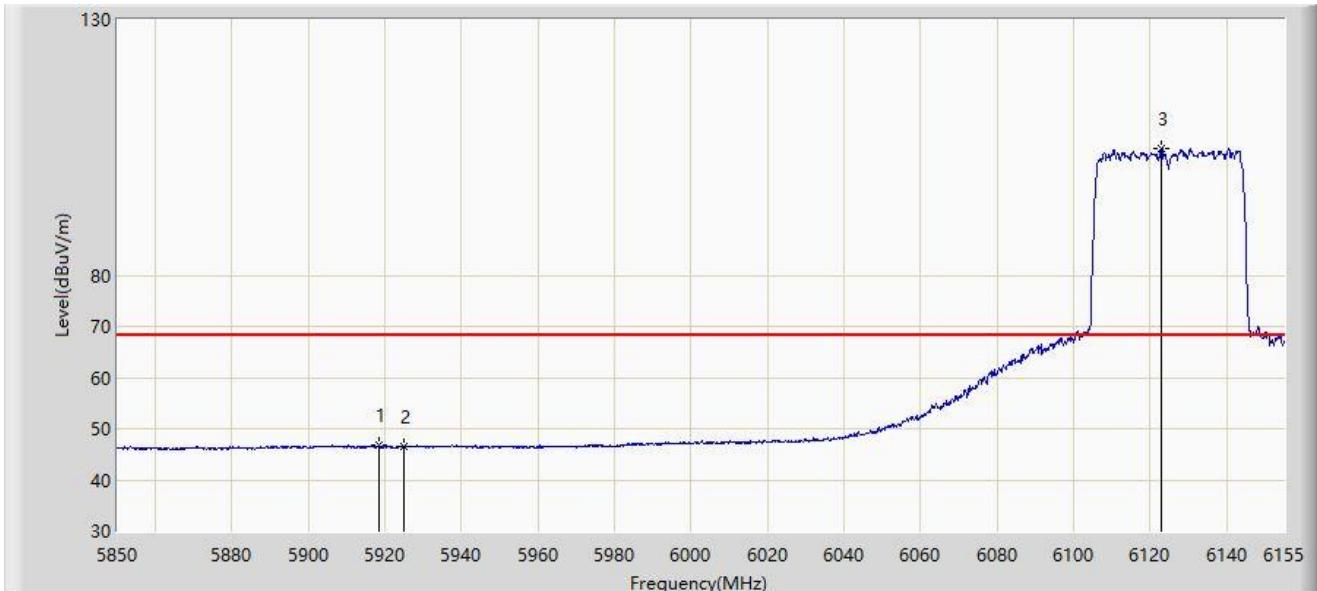


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5918.320	46.689	42.049	-21.511	68.200	4.639	AV
2		5925.000	46.478	41.847	-21.722	68.200	4.631	AV
3		6122.975	104.743	99.895	N/A	N/A	4.849	AV

Note 1: "\*" means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 6845MHz	

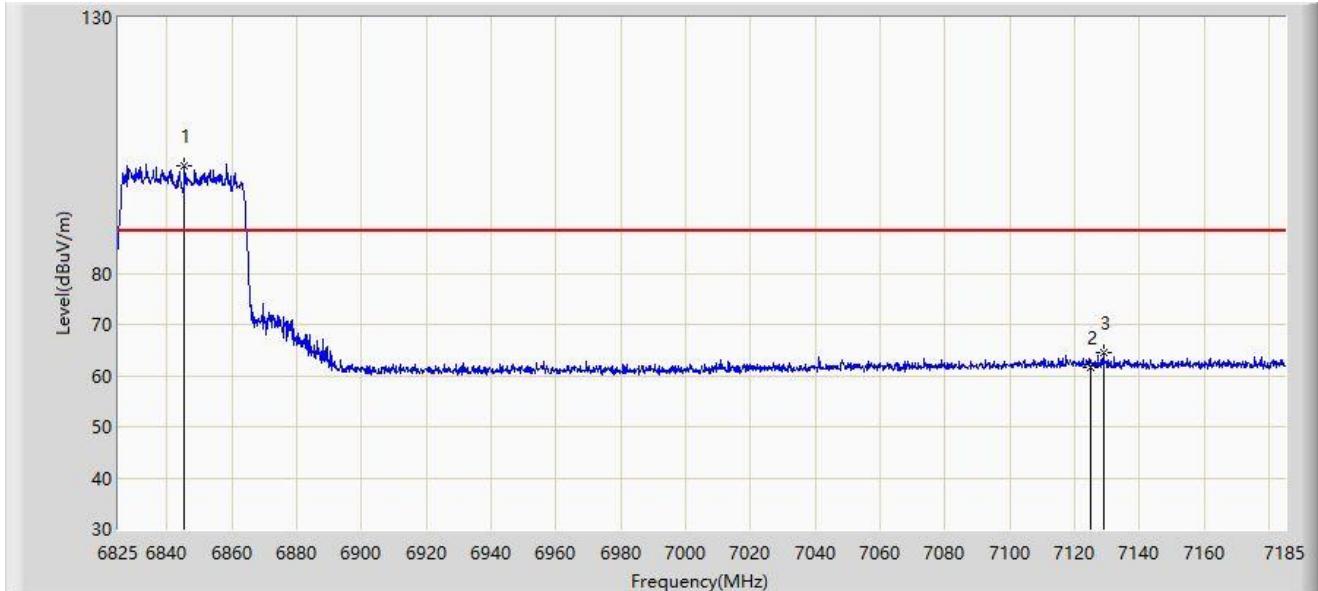


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		6845.520	100.928	94.341	N/A	N/A	6.588	PK
2		7125.000	61.701	53.637	-26.499	88.200	8.064	PK
3	*	7128.840	64.382	56.346	-23.818	88.200	8.036	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 6845MHz	

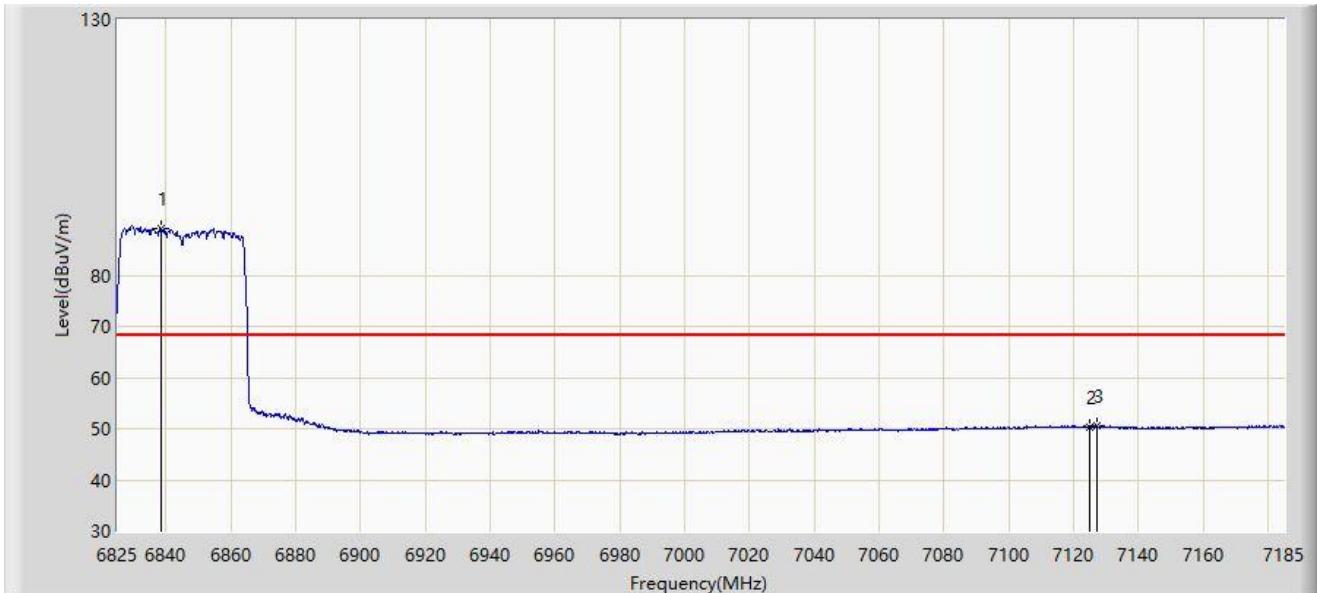


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		6838.320	89.250	82.720	N/A	N/A	6.530	AV
2		7125.000	50.295	42.231	-17.905	68.200	8.064	AV
3	*	7127.040	50.645	42.594	-17.555	68.200	8.051	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 6845MHz	

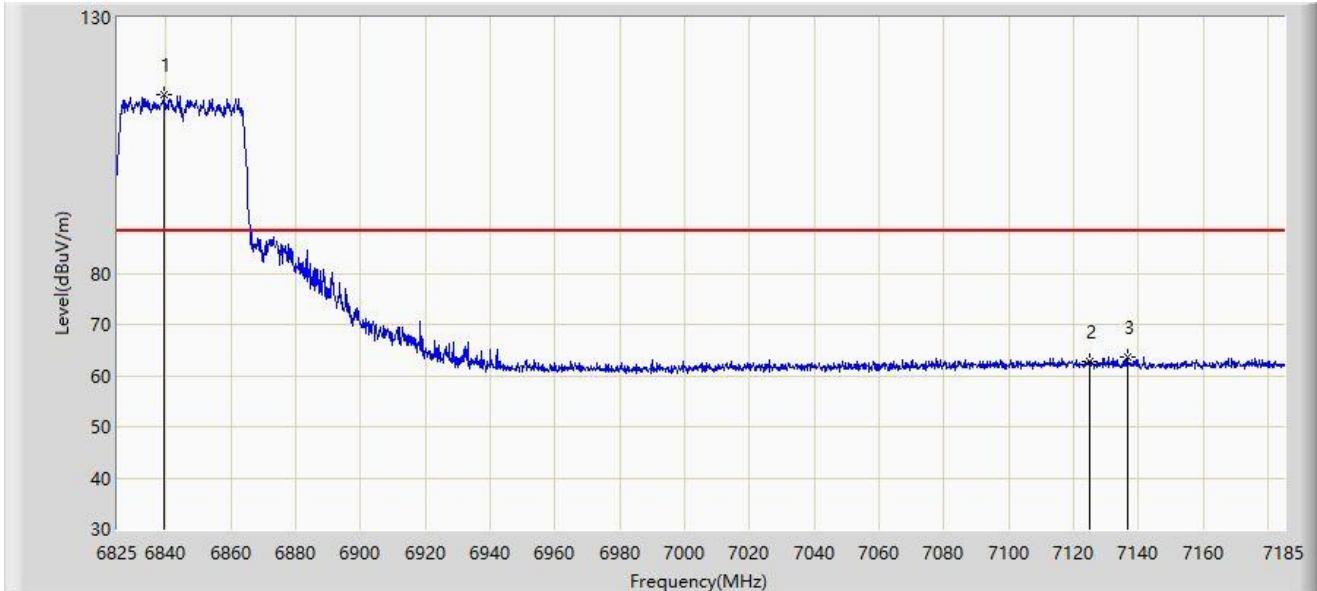


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		6839.580	114.824	108.289	N/A	N/A	6.535	PK
2		7125.000	62.766	54.702	-25.434	88.200	8.064	PK
3	*	7136.580	63.557	55.594	-24.643	88.200	7.963	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-03-04
Limit: FCC_6G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 6845MHz	

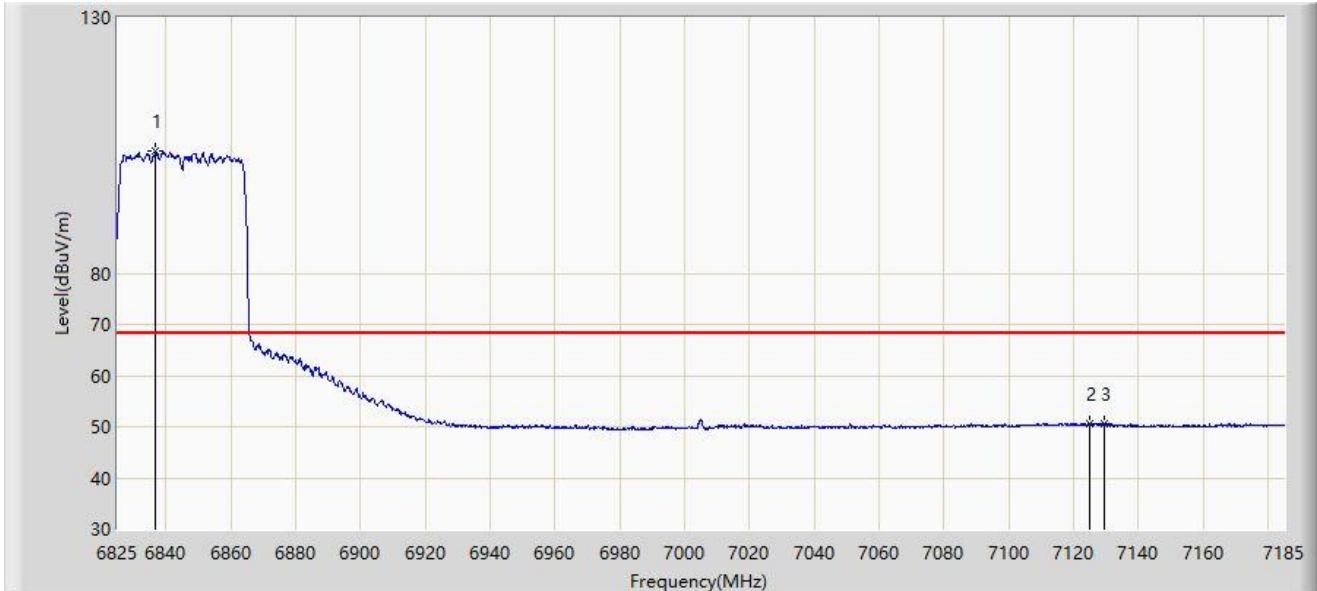

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		6836.700	103.806	97.282	N/A	N/A	6.524	AV
2		7125.000	50.486	42.422	-17.714	68.200	8.064	AV
3	*	7129.380	50.628	42.597	-17.572	68.200	8.032	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).