



RF MEASUREMENT REPORT

FCC ID: Q9DAPIN0755

Applicant: Hewlett Packard Enterprise Company

Product: ACCESS POINT

Model No.: APIN0755

Trademark: 

FCC Classification: Unlicensed National Information Infrastructure (NII)

FCC Rule Part(s): Part 15 Subpart E (Section 15.407)

Result: Complies

Received Date: 2024-03-29

Test Date: 2024-04-04 ~ 2024-07-12

Reviewed By:

Jame Yuan

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB789033. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2403RSU068-U4	V01	Initial Report	2024-07-27	Invalid
2403RSU068-U4	V02	Remove test data of channel puncturing mode	2024-08-13	Valid

CONTENTS

Description	Page
1. General Information	6
1.1. Applicant	6
1.2. Manufacturer	6
1.3. Testing Facility	6
1.4. Product Information	7
1.5. Radio Specification under Test	8
1.6. Working Frequencies	9
1.7. Description of Antenna RF Port	10
1.8. Antenna Details	11
2. Test Configuration	12
2.1. Test Mode	12
2.2. Test System Connection Diagram	13
2.3. Test Software	13
2.4. Applied Standards	14
2.5. Test Environment Condition	14
3. Antenna Requirements	15
4. Measuring Instrument	16
5. Decision Rules and Measurement Uncertainty	18
5.1. Decision Rules	18
5.2. Measurement Uncertainty	18
6. Test Result	19
6.1. Summary	19
6.2. 26dB & 99% Bandwidth Measurement	20
6.2.1. Test Limit	20
6.2.2. Test Procedure	20
6.2.3. Test Setting	20
6.2.4. Test Setup	20
6.2.5. Test Result	21
6.3. 6dB Bandwidth Measurement	22
6.3.1. Test Limit	22
6.3.2. Test Procedure	22
6.3.3. Test Setting	22
6.3.4. Test Setup	22
6.3.5. Test Result	22
6.4. Output Power Measurement	23

6.4.1.	Test Limit.....	23
6.4.2.	Test Procedure	23
6.4.3.	Test Setting	23
6.4.4.	Test Setup.....	23
6.4.5.	Test Result	23
6.5.	Transmit Power Control Measurement.....	24
6.5.1.	Test Limit.....	24
6.5.2.	Test Procedure	24
6.5.3.	Test Setting	24
6.5.4.	Test Setup.....	24
6.5.5.	Test Result	24
6.6.	Power Spectral Density Measurement	25
6.6.1.	Test Limit.....	25
6.6.2.	Test Procedure	25
6.6.3.	Test Setting	25
6.6.4.	Test Setup.....	26
6.6.5.	Test Result	26
6.7.	Frequency Stability Measurement.....	27
6.7.1.	Test Limit.....	27
6.7.2.	Test Procedure	27
6.7.3.	Test Setup.....	27
6.7.4.	Test Result	28
6.8.	Radiated Spurious Emission Measurement	29
6.8.1.	Test Limit.....	29
6.8.2.	Test Procedure	29
6.8.3.	Test Setting	29
6.8.4.	Test Setup.....	31
6.8.5.	Test Result	32
6.9.	Radiated Restricted Band Edge Measurement	33
6.9.1.	Test Limit.....	33
6.9.2.	Test Procedure	35
6.9.3.	Test Setting	35
6.9.4.	Test Setup.....	36
6.9.5.	Test Result	36
6.10.	AC Conducted Emissions Measurement.....	37
6.10.1.	Test Limit.....	37
6.10.2.	Test Setup.....	37
6.10.3.	Test Result	37

Appendix A – Test Result.....	38
--------------------------------------	-----------

A.1	Duty Cycle Test Result.....	38
A.2	26dB Bandwidth Test Result	41
A.3	6dB Bandwidth Test Result	65
A.4	Output Power Test Result	73
A.5	Power Spectral Density Test Result.....	77
A.6	Frequency Stability Test Result.....	161
A.7	Radiated Spurious Emission Test Result.....	162
A.8	Radiated Restricted Band Edge Test Result.....	276
A.9	AC Conducted Emissions Test Result	474
Appendix B - Test Setup Photograph		476
Appendix C - EUT Photograph		477

1. General Information

1.1. Applicant

Hewlett Packard Enterprise Company

6280 America Center Drive, San Jose CA 95002, United States

1.2. Manufacturer

Hewlett Packard Enterprise Company

6280 America Center Drive, San Jose CA 95002, United States

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory
	Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	Laboratory Accreditations
	A2LA: 3628.01 FCC: CN1166 VCCI: ☐ R-20025 ☐ G-20034 ☐ C-20020 ☐ T-20020 ☐ R-20141 ☐ G-20134 ☐ C-20103 ☐ T-20104 CNAS: L10551 ISED: CN0001
☐	Test Site – MRT Shenzhen Laboratory
	Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	Laboratory Accreditations
	A2LA: 3628.02 FCC: CN1284 CNAS: L10551 ISED: CN0105
☐	Test Site – MRT Taiwan Laboratory
	Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	Laboratory Accreditations
	TAF: 3261 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	ACCESS POINT
Model No.	APIN0755
Serial No.	Radiated Sample: CNRRM59015
	Conducted Sample: CNRRM5901H
Software Version	v0.4.3t4
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be
Bluetooth Specification	BLE only
ZigBee Specification	802.15.4
GNSS Specification	GPS, Galileo
Antenna Information	Refer to Section 1.8
Power Type	AC Adapter Input or PoE Input
Operating Environment	Indoor Use
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification under Test

Frequency Range	For 802.11a/n-HT20/ac-VHT20/ax-HE20/be-EHT20: 5180~5240MHz, 5260~5320MHz, 5500~5720MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40/ax-HE40/be-EHT40: 5190~5230MHz, 5270~5310MHz, 5510~5710MHz, 5755~5795MHz For 802.11ac-VHT80/ax-HE80/be-EHT80: 5210MHz, 5290MHz, 5530MHz, 5610 MHz, 5690MHz, 5775MHz For 802.11ac-VHT160/ax-HE160/be-EHT160: 5250MHz, 5570MHz		
Type of Modulation	802.11a/n/ac: OFDM 802.11ax/be: OFDMA		
Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 600Mbps 802.11ac: up to 3464Mbps 802.11ax: up to 4804Mbps 802.11be: up to 5764Mbps		
Support RU	☒ Full RU	☐ Partial RU	☐ Single RU
			☐ Multi RU
			☐ Channel Puncturing

1.6. Working Frequencies

802.11a/n-HT20/ac-VHT20/ax-HE20/be-EHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	--	--	--	--

802.11n-HT40/ac-VHT40/ax-HE40/be-EHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
142	5710 MHz	151	5755 MHz	159	5795 MHz


802.11ac-VHT80/ax-HE80/be-EHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	138	5690 MHz	155	5775 MHz

802.11ac-VHT160/ax-HE160/be-EHT160

Channel	Frequency	Channel	Frequency	Channel	Frequency
50	5250 MHz	114	5570 MHz	--	--

1.7. Description of Antenna RF Port

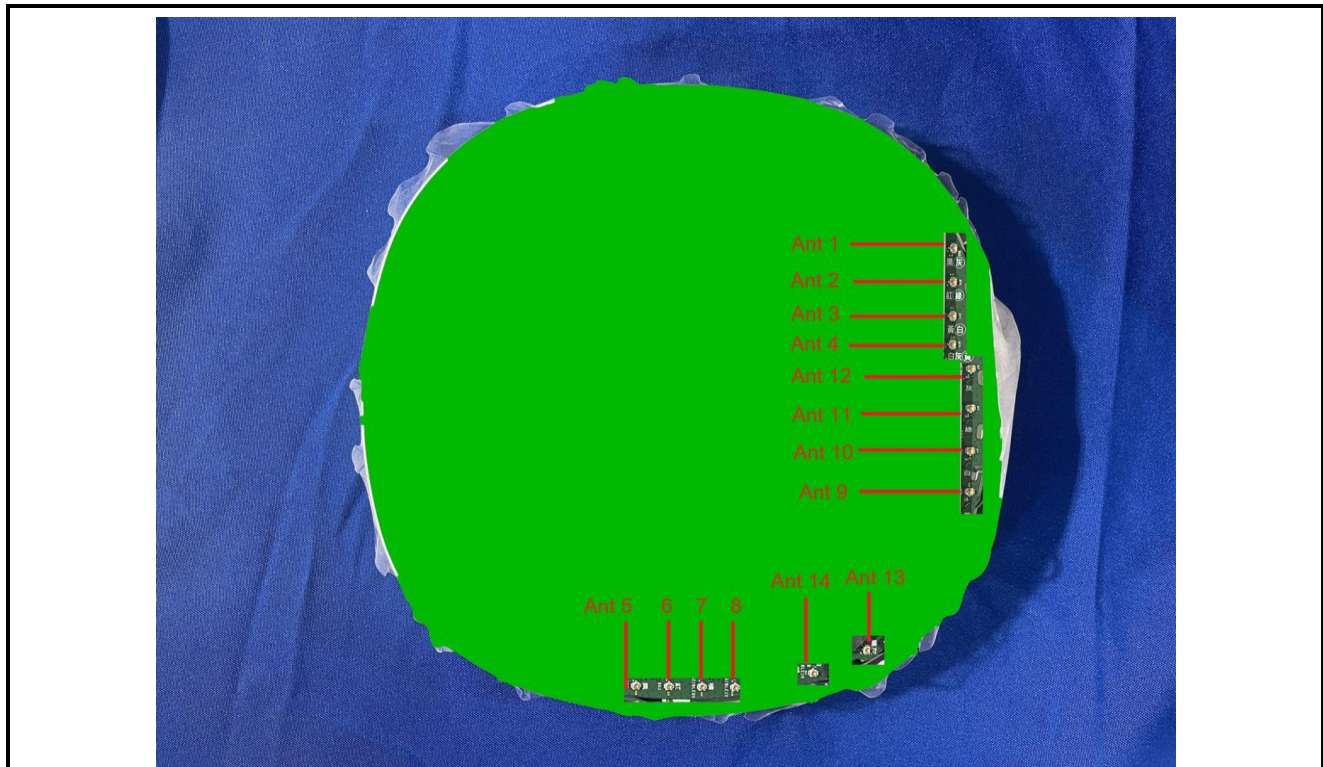

Antenna Port	RF Spec.			
	Wi-Fi 2.4G	Wi-Fi 5G	Wi-Fi 6G	BLE/ZigBee
Ant 1	--	● (Radio 1)	--	--
Ant 2	--	● (Radio 1)	--	--
Ant 3	--	● (Radio 1)	--	--
Ant 4	--	● (Radio 1)	--	--
Ant 5	--	--	● (Radio 0)	--
Ant 6	--	--	● (Radio 0)	--
Ant 7	--	--	● (Radio 0)	● (Core 0)
Ant 8	--	--	● (Radio 0)	● (Core 1)
Ant 9	● (Radio 2)	--	--	--
Ant 10	● (Radio 2)	--	--	--
Ant 11	● (Radio 2)	--	--	--
Ant 12	● (Radio 2)	--	--	--
Ant 13	GNSS			
Ant 14	--	--	--	● (Core 1)

1.8. Antenna Details

Antenna Type	Wi-Fi Antenna	Frequency Band (GHz)	Tx Paths	Directional Gain (dBi)	
				Uncorrelated	Correlated
PIFA	Ant 1	5.15 ~ 5.9	4	3.6	9.5
PIFA	Ant 2	5.15 ~ 5.9			
Alford Loop	Ant 3	5.15 ~ 5.9			
Alford Loop	Ant 4	5.15 ~ 5.9			

Note:

- 1, The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.
- 2, The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac/ax/be, not include 802.11a/b/g.
- 3, For beamforming operation, Aruba OS automatically backs power down based on CDD power.
- 4, The detail calculation method of directional gain refers to antenna specification provided by the applicant.

2. Test Configuration


2.1. Test Mode

Mode 1: Transmit by 802.11a (6Mbps)
Mode 2: Transmit by 802.11ac-VHT20_Nss=1 (MCS0)
Mode 3: Transmit by 802.11ac-VHT40_Nss=1 (MCS0)
Mode 4: Transmit by 802.11ac-VHT80_Nss=1 (MCS0)
Mode 5: Transmit by 802.11ac-VHT160_Nss=1 (MCS0)
Mode 6: Transmit by 802.11ax-HE20_Nss=1 (MCS0)
Mode 7: Transmit by 802.11ax-HE40_Nss=1 (MCS0)
Mode 8: Transmit by 802.11ax-HE80_Nss=1 (MCS0)
Mode 9: Transmit by 802.11ax-HE160_Nss=1 (MCS0)
Mode 10: Transmit by 802.11be-EHT20_Nss=1 (MCS0)
Mode 11: Transmit by 802.11be-EHT40_Nss=1 (MCS0)
Mode 12: Transmit by 802.11be-EHT80_Nss=1 (MCS0)
Mode 13: Transmit by 802.11be-EHT160_Nss=1 (MCS0)
Note: 1. All modes of operation and data rates were investigated, so all RF test requirements shall be executed at the worst data rate. 2. 802.11n and 802.11ac have same modulation type and same power value, so we only show 802.11ac test data in report. 3. For CDD mode, this device supports 4 Nss and power level is the same of spatial multiplexing. The worst case is Nss=1. 4. For beamforming operation, manufacturer automatically backs power down based on CDD power. Therefore, only the CDD mode was evaluated in this report.

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

Connection Diagram

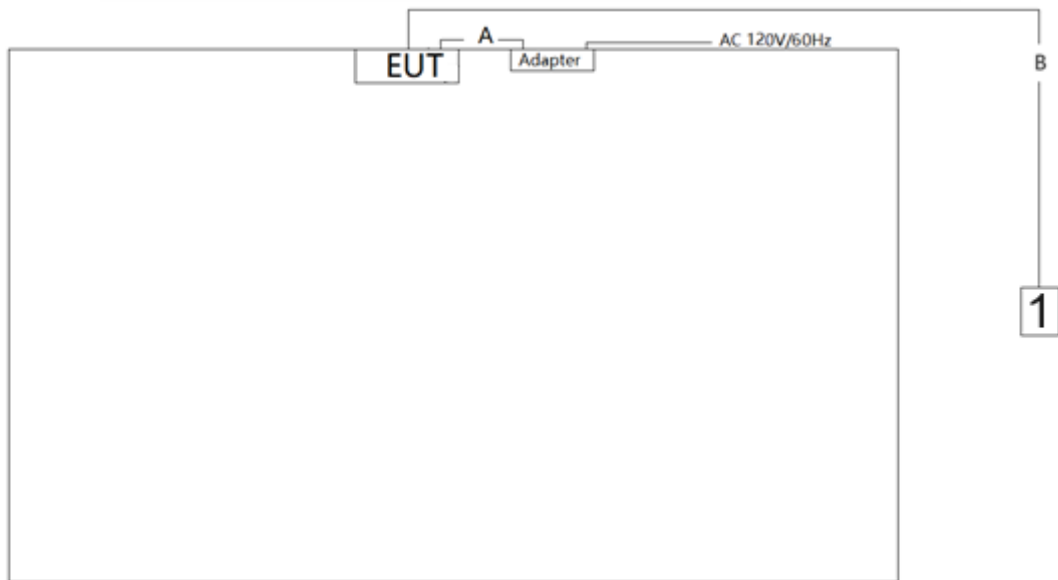

No.	Cable Type	Cable Spec.	Length
A	Power Cable	Non-Shielded	1.2m
B	LAN Cable	Non-Shielded, Cat 6	>10.0m
No.	Product	Manufacturer	Model No.
1	Notebook	DELL	Latitude 5491

2.3. Test Software

The test utility software used during testing was “accessMTool”, and the version was 3.3.0.6.

Note: Final power setting please refer to operational description.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.407
- KDB 789033 D02v02r01
- KDB 662911 D01v02r01
- ANSI C63.10-2013

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2024-12-21	SIP-AC1
Thermohygrometer	testo	608-H1	MRTSUE06616	1 year	2024-10-28	SIP-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06645	1 year	2024-07-13	SIP-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06645	1 year	2025-07-05	SIP-AC1
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2025-01-27	SIP-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE07028	1 year	2024-10-23	SIP-AC1
Preamplifier	EMCI	EMC051845SE	MRTSUE06601	1 year	2024-11-02	SIP-AC2
Thermohygrometer	testo	608-H1	MRTSUE06622	1 year	2024-11-03	SIP-AC2
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2024-12-21	SIP-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06648	1 year	2024-10-21	SIP-AC2
Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2025-02-03	SIP-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2024-10-09	SIP-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06598	1 year	2024-11-04	SIP-AC2
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2025-06-06	SIP-AC3
Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2025-07-07	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE06619	1 year	2024-10-28	SIP-AC3
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2025-01-11	SIP-AC3
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2024-12-21	SIP-AC3
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2024-08-09	WZ-AC1
Preamplifier	Agilent	83017A	MRTSUE06076	1 year	2024-11-09	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2024-04-20	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2025-04-19	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11039	1 year	2024-10-25	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2024-10-11	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2024-05-07	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2025-05-06	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2024-04-20	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2025-04-18	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11263	1 year	2024-11-07	WZ-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2024-10-23	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2024-05-31	WZ-SR5
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2025-05-12	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2024-05-23	WZ-SR5

Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2025-05-08	WZ-SR5
USB Power Sensor	Keysight	U2021XA	MRTSUE06446	1 year	2024-05-23	WZ-SR5
USB Power Sensor	Keysight	U2021XA	MRTSUE06446	1 year	2025-05-08	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11092	1 year	2024-06-08	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11092	1 year	2025-06-05	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11087	1 year	2024-06-08	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11087	1 year	2025-06-05	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2024-05-23	WZ-SR5/WZ-TR3
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2025-05-08	WZ-SR5/WZ-TR3
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2024-09-27	WZ-TR3
Thermohygrometer	testo	608-H1	MRTSUE11268	1 year	2024-12-14	WZ-TR3
Shielding Room	MIX-BEP	WZ-SR2	MRTSUE06215	5 years	2026-12-20	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2025-05-12	WZ-SR2
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2025-05-08	WZ-SR2
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2024-05-23	WZ-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2024-09-27	WZ-SR2

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
e3	230711	RE & CE
Controller_MF 7802BS	1.02	RE Antenna & Turntable
Controller_MF 7802	1.02	RE Antenna & Turntable
BenchVue Power Meter	2018.1	Power

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
Radiated Emission Measurement
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.61dB Coplanar: 9kHz~30MHz: 2.62dB Horizontal: 30MHz~200MHz: 3.79dB 200MHz~1GHz: 3.91dB 1GHz~40GHz: 4.99dB Vertical: 30MHz~200MHz: 4.06dB 200MHz~1GHz: 5.21dB 1GHz~40GHz: 4.90dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.2dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.4dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.2dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.7%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.407(a)	26dB Bandwidth	Conducted	Pass
15.407(e)	6dB Bandwidth		Pass
15.407(a)(1)(ii), (2), (3)(i)	Maximum Conducted Output Power		Pass
15.407(h)(1)	Transmit Power Control		Pass
15.407(g)	Frequency Stability		Pass
15.407(a)(1)(ii), (2), (3)(i), (13)	Peak Power Spectral Density		Pass
15.407(b)(1), (2), (3), (4)(i)	Undesirable Emissions	Radiated	Pass
15.205, 15.209 15.407(b)(8), (9), (10)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)		Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Remark:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

6.2. 26dB & 99% Bandwidth Measurement

6.2.1. Test Limit

N/A

6.2.2. Test Procedure

KDB 789033 D02v02r01- Section II)C)1) (26dB Bandwidth)

KDB 789033 D02v02r01- Section II)D) (99% Bandwidth)

6.2.3. Test Setting


26dB Bandwidth

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth
2. RBW = approximately 1% of the emission bandwidth.
3. VBW > RBW
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 1% to 5% of the OBW
3. $VBW \geq 3 \times RBW$
4. Span = 1.5 times to 5 times the OBW
5. Detector = peak
6. Trace mode = max hold
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument.

6.2.4. Test Setup

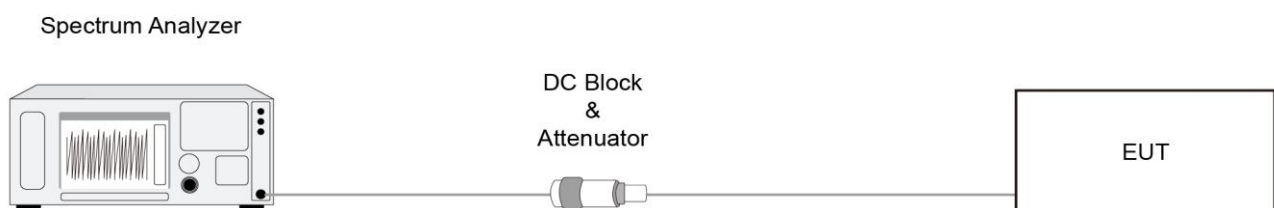

6.2.5. Test Result

Refer to Appendix A.2.

6.3. 6dB Bandwidth Measurement

6.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


6.3.2. Test Procedure

KDB 789033 D02v02r01- Section II)C)2)

6.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.4. Test Setup

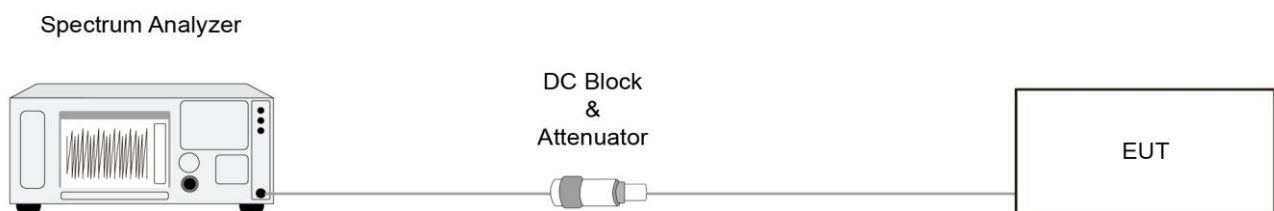

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Output Power Measurement

6.4.1. Test Limit

For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

6.4.2. Test Procedure


KDB 789033D02v02r01- Section II)E)3)b) Method PM-G

6.4.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.4.4. Test Setup

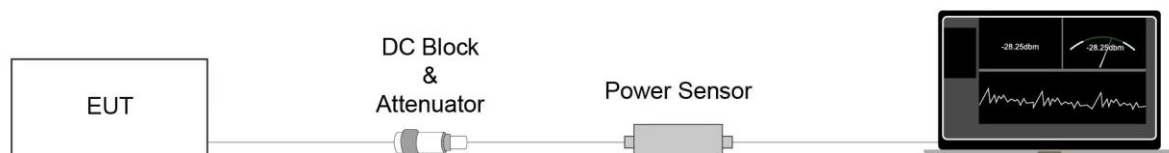

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Transmit Power Control Measurement

6.5.1. Test Limit

The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm.


6.5.2. Test Procedure

KDB 789033 D02v02r01- Section II)E)3)b) Method PM-G

6.5.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

6.5.4. Test Setup

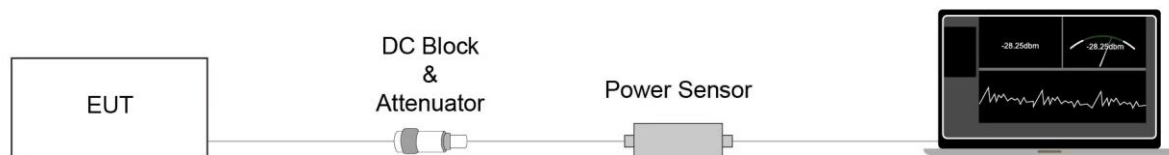

6.5.5. Test Result

Device supports TPC mechanism, details refer to the operational description.

6.6. Power Spectral Density Measurement

6.6.1. Test Limit

For the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


6.6.2. Test Procedure

KDB 789033 D02v02r01-Section II)F)

6.6.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz (510kHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz)
4. VBW = $3 \times \text{RBW}$
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
10. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
11. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6 \text{ dB}$ if the duty cycle is 25 percent.

6.6.4. Test Setup

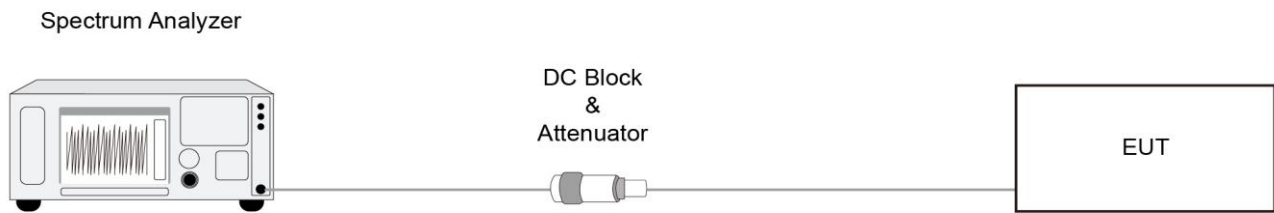

6.6.5. Test Result

Refer to Appendix A.5.

6.7. Frequency Stability Measurement

6.7.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.7.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

6.7.3. Test Setup

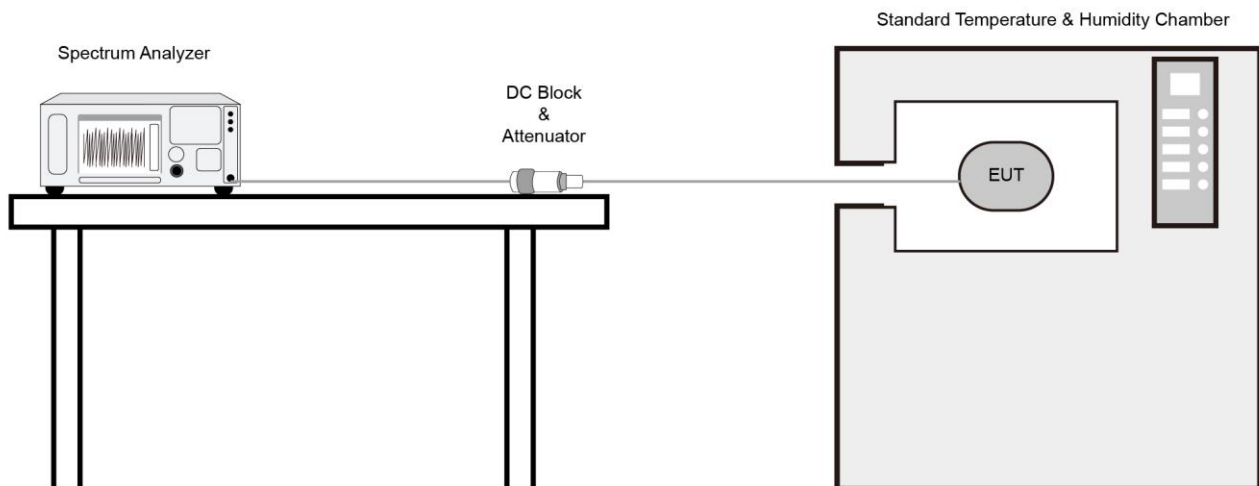

6.7.4. Test Result

Refer to Appendix A.6.

6.8. Radiated Spurious Emission Measurement

6.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.8.2. Test Procedure

KDB 789033 D02v02r01- Section II)G)

6.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz

If the EUT duty cycle is $< 98\%$, set $\text{VBW} \geq 1/T$. T is the minimum transmission duration.


802.11a	VBW = 510Hz	802.11ax-HE80	VBW = 2700Hz
802.11ac-VHT20	VBW = 560Hz	802.11ax-HE160	VBW = 4300Hz
802.11ac-VHT40	VBW = 1100Hz	802.11be-EHT20	VBW = 680Hz
802.11ac-VHT80	VBW = 2200Hz	802.11be-EHT40	VBW = 1300Hz
802.11ac-VHT160	VBW = 4300Hz	802.11be-EHT80	VBW = 2700Hz
802.11ax-HE20	VBW = 680Hz	802.11be-EHT160	VBW = 4300Hz
802.11ax-HE40	VBW = 1300Hz	--	--

4. Average-VBW Type was set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = Auto


7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.8.4. Test Setup


Below 30MHz Test Setup:

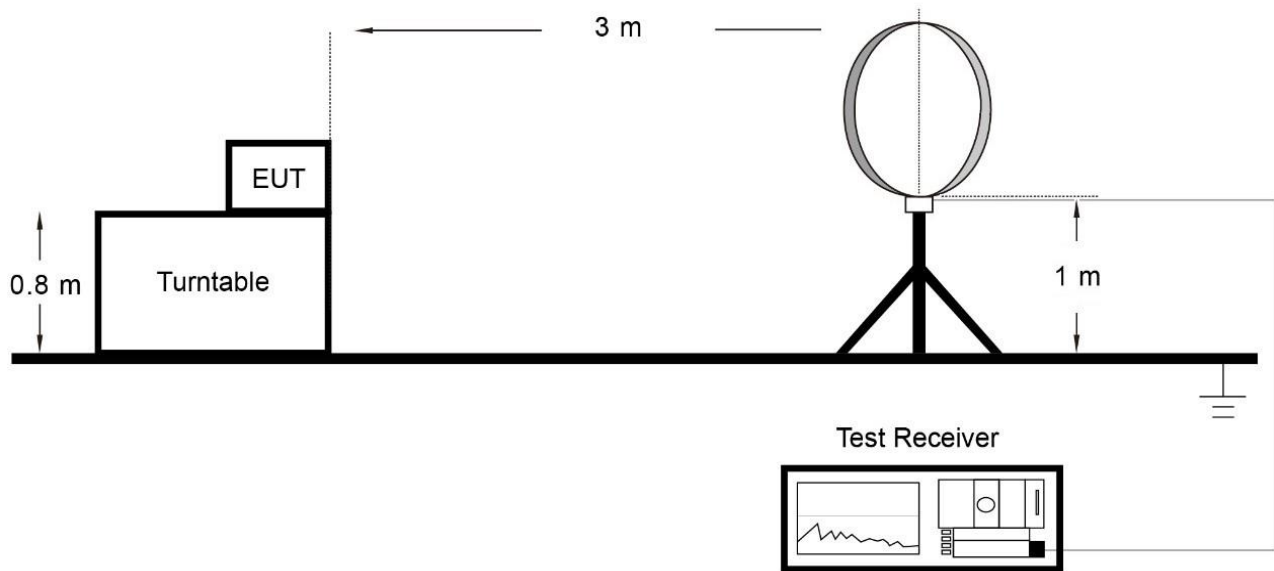

Below 1GHz Test Setup:

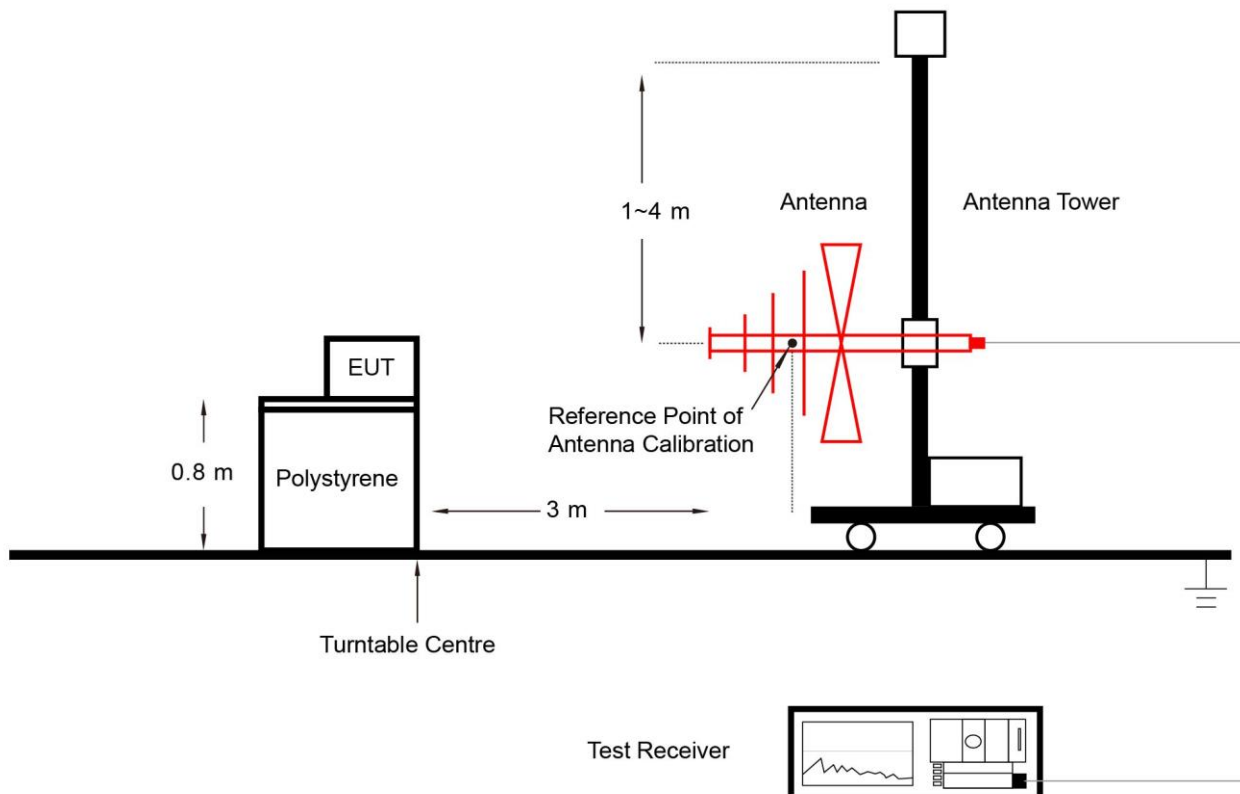

Above 1GHz Test Setup:

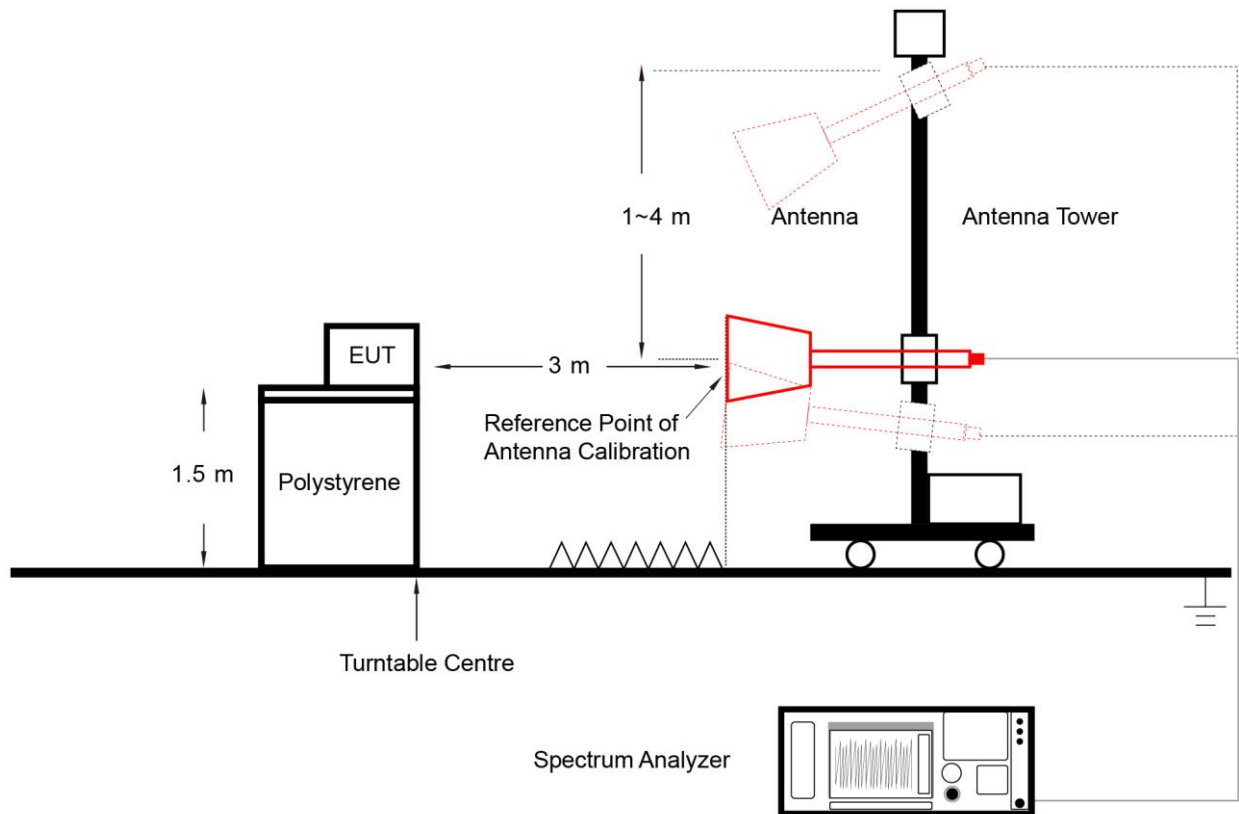

6.8.5. Test Result

Refer to Appendix A.7.

6.9. Radiated Restricted Band Edge Measurement

6.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.9.2. Test Procedure

KDB 789033 D02v02r01- Section II)G)

6.9.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set $\text{VBW} \geq 1/T$. T is the minimum transmission duration.

802.11a	VBW = 510Hz	802.11ax-HE80	VBW = 2700Hz
802.11ac-VHT20	VBW = 560Hz	802.11ax-HE160	VBW = 4300Hz
802.11ac-VHT40	VBW = 1100Hz	802.11be-EHT20	VBW = 680Hz
802.11ac-VHT80	VBW = 2200Hz	802.11be-EHT40	VBW = 1300Hz
802.11ac-VHT160	VBW = 4300Hz	802.11be-EHT80	VBW = 2700Hz
802.11ax-HE20	VBW = 680Hz	802.11be-EHT160	VBW = 4300Hz
802.11ax-HE40	VBW = 1300Hz	--	--

4. Average-VBW Type was set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.9.4. Test Setup

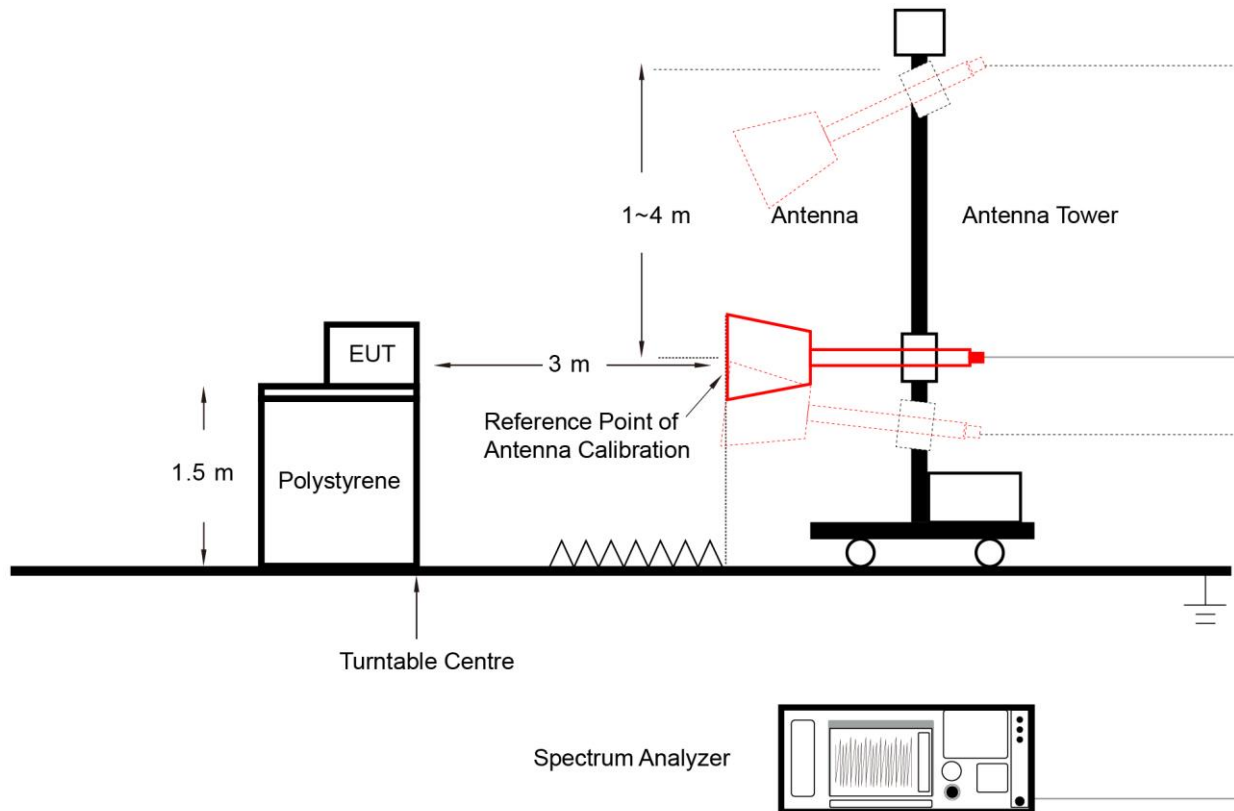

6.9.5. Test Result

Refer to Appendix A.8.

6.10. AC Conducted Emissions Measurement


6.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.10.2. Test Setup

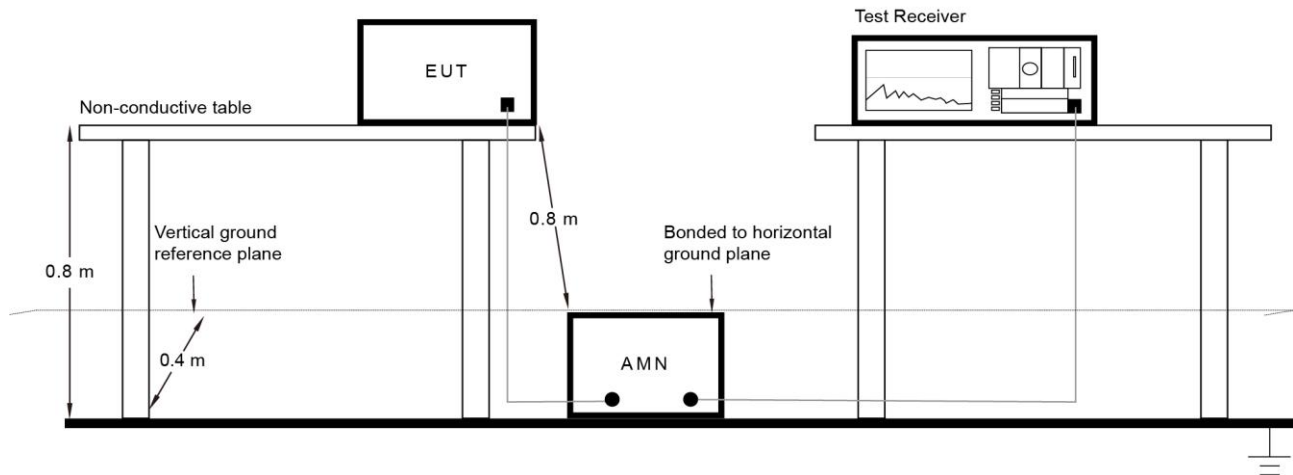

6.10.3. Test Result


Refer to Appendix A.9.

Appendix A – Test Result

A.1 Duty Cycle Test Result


Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-09		

Test Mode	Duty Cycle	Test Mode	Duty Cycle
802.11a	94.77%	802.11ax-HE80	90.52%
802.11ac-VHT20	98.21%	802.11ax-HE160	88.53%
802.11ac-VHT40	96.65%	802.11be-EHT20	97.71%
802.11ac-VHT80	93.46%	802.11be-EHT40	95.92%
802.11ac-VHT160	88.73%	802.11be-EHT80	92.74%
802.11ax-HE20	97.71%	802.11be-EHT160	88.50%
802.11ax-HE40	95.97%	--	--

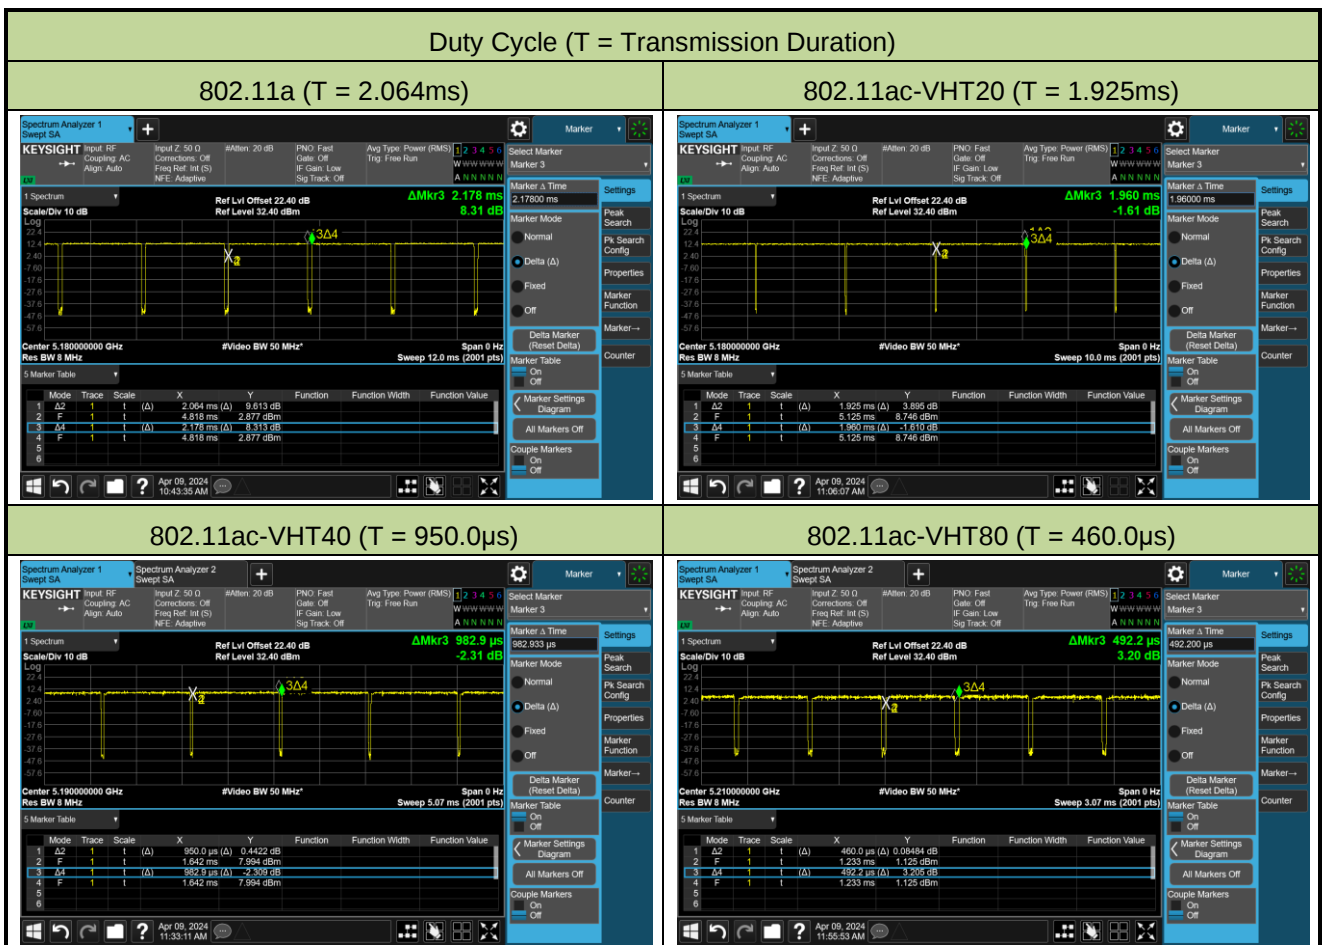


Duty Cycle (T = Transmission Duration)


802.11ac-VHT160 (T = 252.0µs)

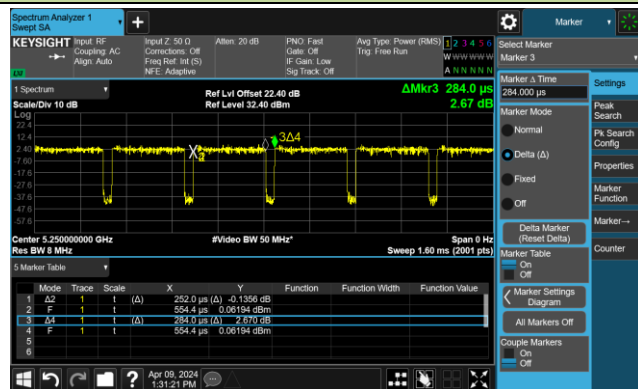


802.11ax-HE20 (T = 1.493ms)

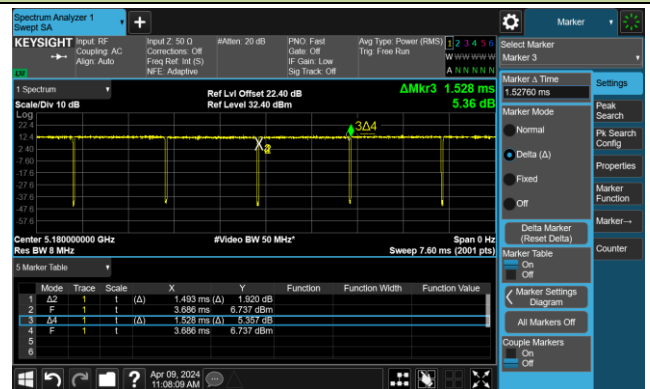


802.11ax-HE40 (T = 782.8µs)

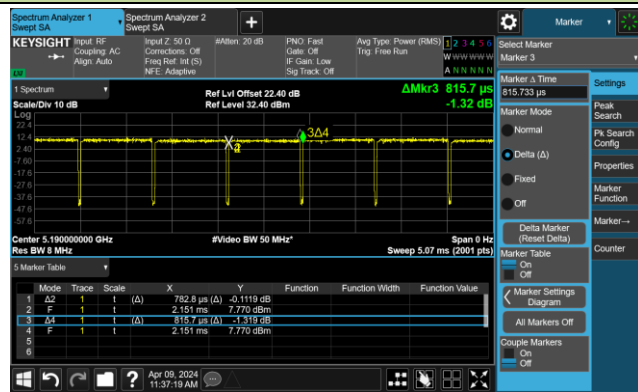


802.11ax-HE80 (T = 296.0µs)

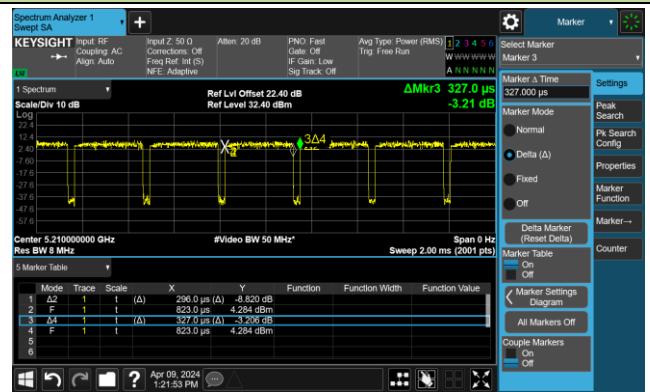


802.11ax-HE160 (T = 240.8µs)

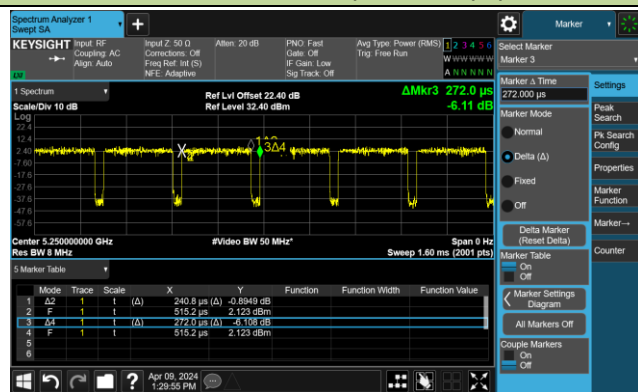


802.11be-EHT20 (T = 1.493ms)

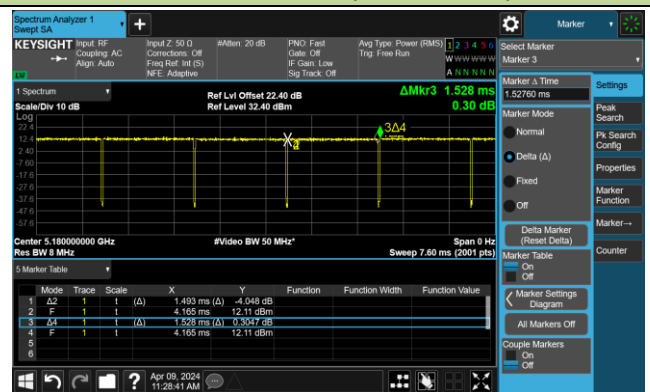


802.11be-EHT40 (T = 772.7µs)

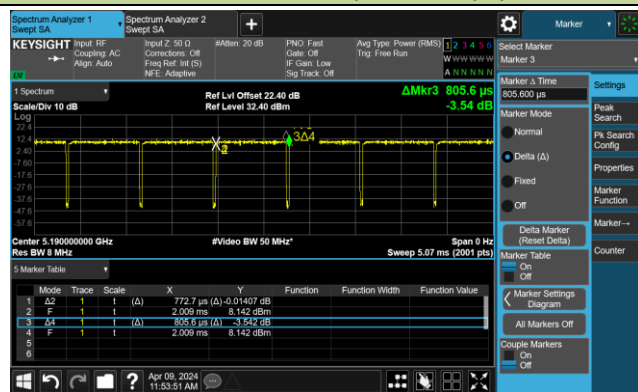

802.11be-EHT80 (T = 409.0µs)

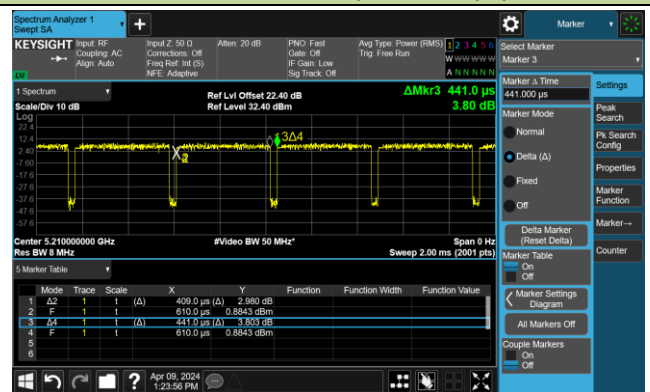

Duty Cycle (T = Transmission Duration)

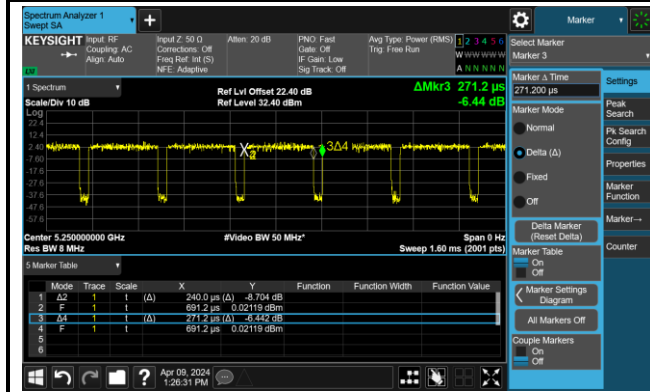802.11be-EHT160 (T = 240.0 μ s)


A.2 26dB Bandwidth Test Result

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-18~2024-06-26		

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
11a	6Mbps	36	5180	21.39	16.816
11a	6Mbps	44	5220	21.63	16.780
11a	6Mbps	48	5240	21.38	16.743
11a	6Mbps	52	5260	21.46	16.811
11a	6Mbps	60	5300	21.27	16.764
11a	6Mbps	64	5320	21.45	16.746
11a	6Mbps	100	5500	21.54	16.848
11a	6Mbps	116	5580	21.15	16.725
11a	6Mbps	140	5700	21.30	16.803
11a	6Mbps	144	5720	21.49	16.801
11a	6Mbps	149	5745	21.51	16.805
11a	6Mbps	157	5785	21.40	16.695
11a	6Mbps	165	5825	21.29	16.767
11ac-VHT20	MCS0	36	5180	21.37	17.919
11ac-VHT20	MCS0	44	5220	21.41	17.886
11ac-VHT20	MCS0	48	5240	21.52	17.948
11ac-VHT20	MCS0	52	5260	21.47	17.890
11ac-VHT20	MCS0	60	5300	21.66	17.970
11ac-VHT20	MCS0	64	5320	21.63	17.864
11ac-VHT20	MCS0	100	5500	21.64	17.877
11ac-VHT20	MCS0	116	5580	21.67	17.916
11ac-VHT20	MCS0	140	5700	21.75	17.928
11ac-VHT20	MCS0	144	5720	21.52	17.940
11ac-VHT20	MCS0	149	5745	21.65	17.903
11ac-VHT20	MCS0	157	5785	21.67	17.888
11ac-VHT20	MCS0	165	5825	21.53	17.951

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
11ac-VHT40	MCS0	38	5190	40.04	36.324
11ac-VHT40	MCS0	46	5230	39.98	36.385
11ac-VHT40	MCS0	54	5270	39.49	36.335
11ac-VHT40	MCS0	62	5310	39.83	36.371
11ac-VHT40	MCS0	102	5510	40.00	36.237
11ac-VHT40	MCS0	110	5550	39.96	36.325
11ac-VHT40	MCS0	134	5670	40.03	36.396
11ac-VHT40	MCS0	142	5710	40.08	36.351
11ac-VHT40	MCS0	151	5755	39.71	36.341
11ac-VHT40	MCS0	159	5795	40.22	36.384
11ac-VHT80	MCS0	42	5210	81.63	75.769
11ac-VHT80	MCS0	58	5290	81.07	75.620
11ac-VHT80	MCS0	106	5530	81.42	75.742
11ac-VHT80	MCS0	122	5610	81.01	75.662
11ac-VHT80	MCS0	138	5690	81.32	75.784
11ac-VHT80	MCS0	155	5775	81.22	75.649
11ac-VHT160	MCS0	50	5250	163.10	154.310
11ac-VHT160	MCS0	114	5570	162.90	153.980
11ax-HE20	MCS0	36	5180	21.71	19.124
11ax-HE20	MCS0	44	5220	21.45	19.051
11ax-HE20	MCS0	48	5240	21.70	19.060
11ax-HE20	MCS0	52	5260	21.66	19.076
11ax-HE20	MCS0	60	5300	21.06	19.027
11ax-HE20	MCS0	64	5320	21.41	19.065
11ax-HE20	MCS0	100	5500	21.44	19.039
11ax-HE20	MCS0	116	5580	21.69	19.020
11ax-HE20	MCS0	140	5700	21.31	19.091
11ax-HE20	MCS0	144	5720	21.08	19.001
11ax-HE20	MCS0	149	5745	21.73	19.069
11ax-HE20	MCS0	157	5785	21.19	19.043
11ax-HE20	MCS0	165	5825	21.43	19.098

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
11ax-HE40	MCS0	38	5190	40.22	37.711
11ax-HE40	MCS0	46	5230	40.37	37.788
11ax-HE40	MCS0	54	5270	40.10	37.767
11ax-HE40	MCS0	62	5310	39.82	37.645
11ax-HE40	MCS0	102	5510	40.43	37.716
11ax-HE40	MCS0	110	5550	40.23	37.688
11ax-HE40	MCS0	134	5670	40.19	37.736
11ax-HE40	MCS0	142	5710	40.18	37.685
11ax-HE40	MCS0	151	5755	40.33	37.666
11ax-HE40	MCS0	159	5795	40.54	37.741
11ax-HE80	MCS0	42	5210	81.64	77.310
11ax-HE80	MCS0	58	5290	81.21	76.995
11ax-HE80	MCS0	106	5530	81.01	77.089
11ax-HE80	MCS0	122	5610	81.54	77.180
11ax-HE80	MCS0	138	5690	81.52	77.078
11ax-HE80	MCS0	155	5775	81.19	77.028
11ax-HE160	MCS0	50	5250	163.10	156.140
11ax-HE160	MCS0	114	5570	163.80	155.730
11be-EHT20	MCS0	36	5180	21.34	19.025
11be-EHT20	MCS0	44	5220	21.72	19.048
11be-EHT20	MCS0	48	5240	21.63	19.057
11be-EHT20	MCS0	52	5260	21.54	19.136
11be-EHT20	MCS0	60	5300	21.04	19.041
11be-EHT20	MCS0	64	5320	21.64	19.053
11be-EHT20	MCS0	100	5500	21.33	19.030
11be-EHT20	MCS0	116	5580	21.24	19.036
11be-EHT20	MCS0	140	5700	21.65	19.030
11be-EHT20	MCS0	144	5720	21.04	19.019
11be-EHT20	MCS0	149	5745	21.38	19.055
11be-EHT20	MCS0	157	5785	21.52	19.018
11be-EHT20	MCS0	165	5825	21.61	19.097

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
11be-EHT40	MCS0	38	5190	40.68	37.711
11be-EHT40	MCS0	46	5230	40.66	37.706
11be-EHT40	MCS0	54	5270	40.55	37.674
11be-EHT40	MCS0	62	5310	39.94	37.699
11be-EHT40	MCS0	102	5510	40.55	37.678
11be-EHT40	MCS0	110	5550	40.19	37.704
11be-EHT40	MCS0	134	5670	39.95	37.666
11be-EHT40	MCS0	142	5710	40.49	37.755
11be-EHT40	MCS0	151	5755	40.29	37.665
11be-EHT40	MCS0	159	5795	40.74	37.767
11be-EHT80	MCS0	42	5210	81.50	77.284
11be-EHT80	MCS0	58	5290	81.27	76.881
11be-EHT80	MCS0	106	5530	81.46	77.255
11be-EHT80	MCS0	122	5610	81.61	77.236
11be-EHT80	MCS0	138	5690	81.01	77.271
11be-EHT80	MCS0	155	5775	81.67	77.038
11be-EHT160	MCS0	50	5250	163.20	156.070
11be-EHT160	MCS0	114	5570	163.30	155.780


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	F _H (MHz)	Limit (MHz)
802.11a	6Mbps	48	5240	5248.37	< 5250
802.11ac-VHT20	MCS0	48	5240	5248.97	< 5250
802.11ac-VHT40	MCS0	46	5230	5248.19	< 5250
802.11ac-VHT80	MCS0	42	5210	5247.88	< 5250
802.11ax-HE20	MCS0	48	5240	5249.53	< 5250
802.11ax-HE40	MCS0	46	5230	5248.89	< 5250
802.11ax-HE80	MCS0	42	5210	5248.66	< 5250
802.11be-EHT20	MCS0	48	5240	5249.53	< 5250
802.11be-EHT40	MCS0	46	5230	5248.85	< 5250
802.11be-EHT80	MCS0	42	5210	5248.64	< 5250

Note: $F_H = \text{Centre frequency} + 99\% \text{ OBW} / 2$.


For example, 802.11a 5240MHz, $F_H = 5240 \text{ MHz} + 16.743 \text{ MHz} / 2 = 5248.37 \text{ MHz}$.

802.11a 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

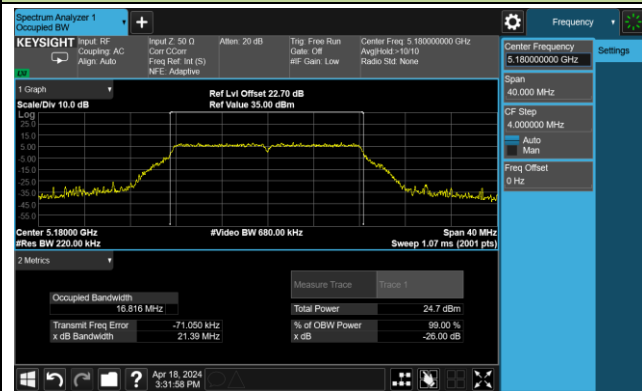


Channel 44 (5220MHz)

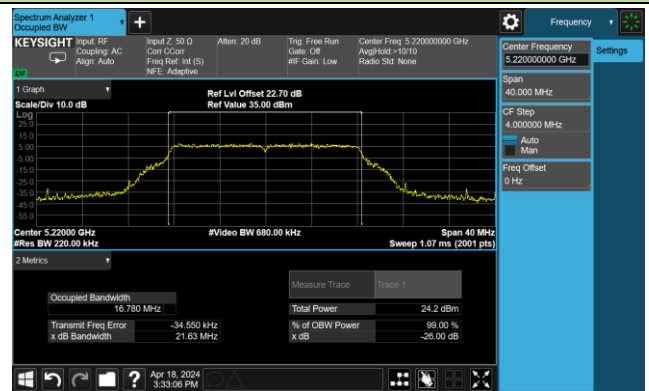


Channel 48 (5240MHz)

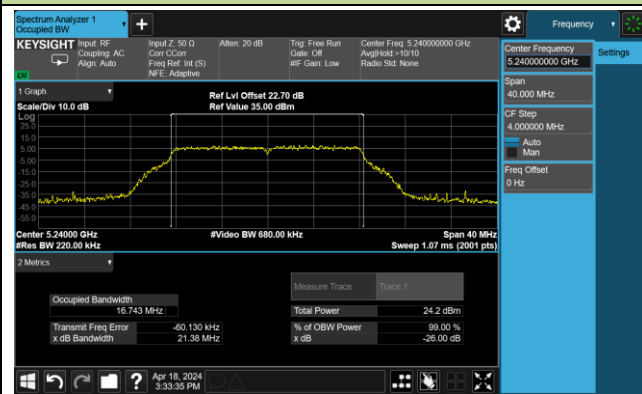


Channel 52 (5260MHz)

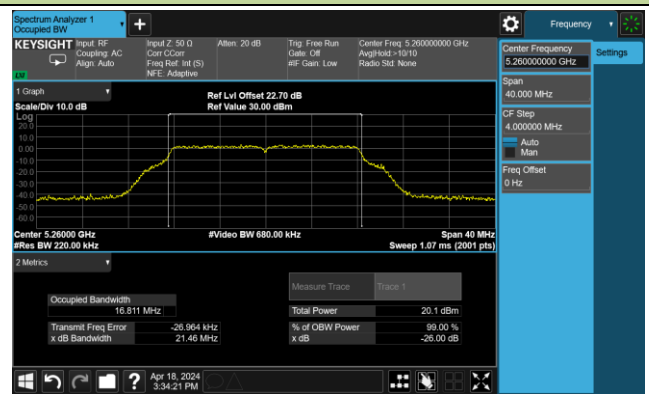


Channel 60 (5300MHz)

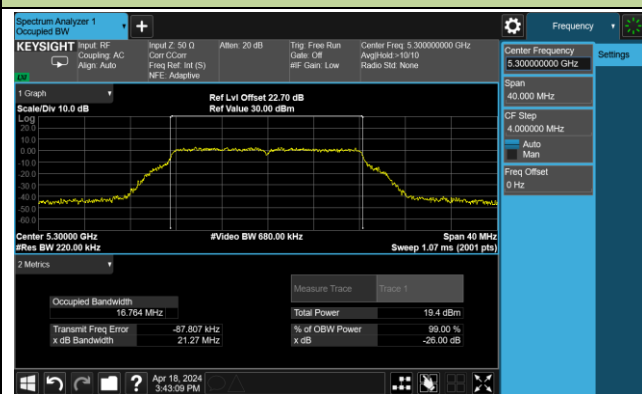


Channel 64 (5320MHz)

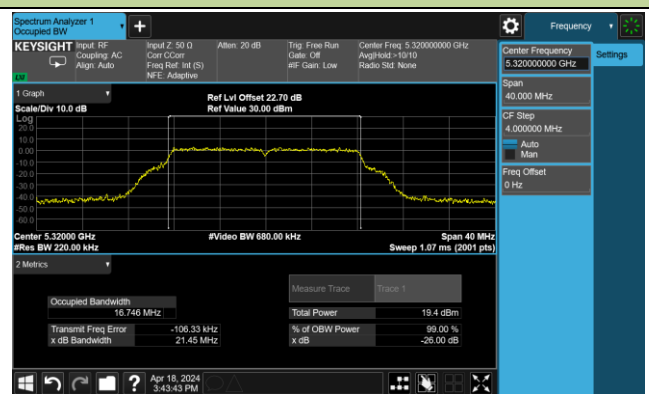

Channel 100 (5500MHz)

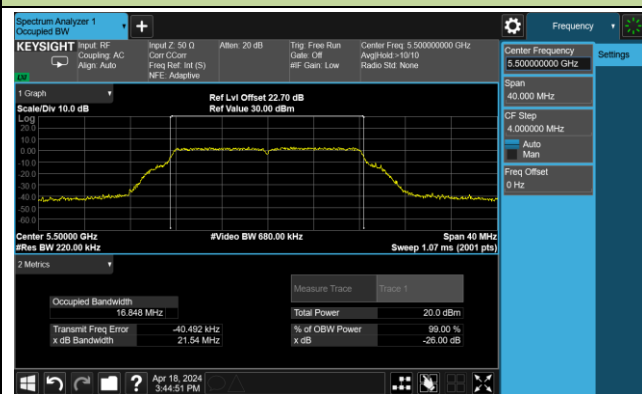


Channel 116 (5580MHz)

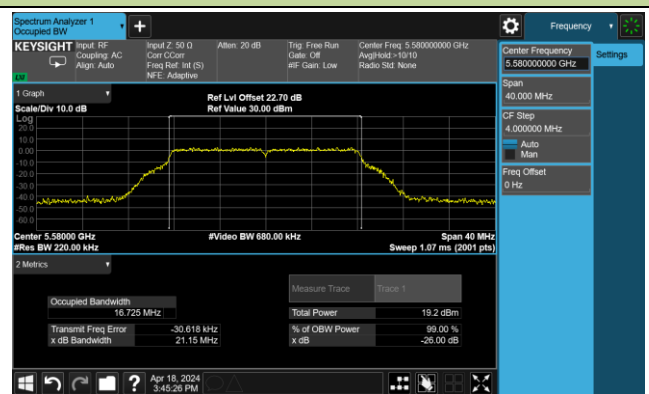


802.11a 26dB Bandwidth & 99% Bandwidth


Channel 140 (5700MHz)

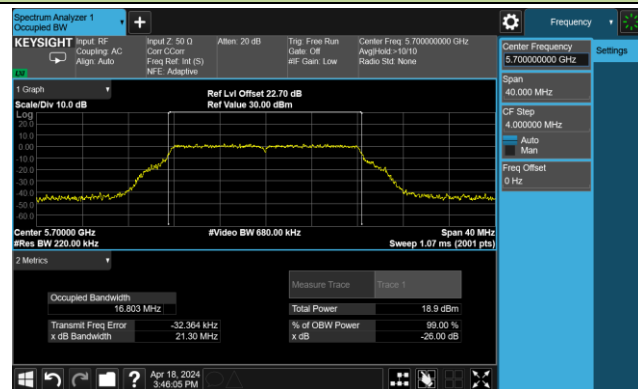


Channel 144 (5720MHz)

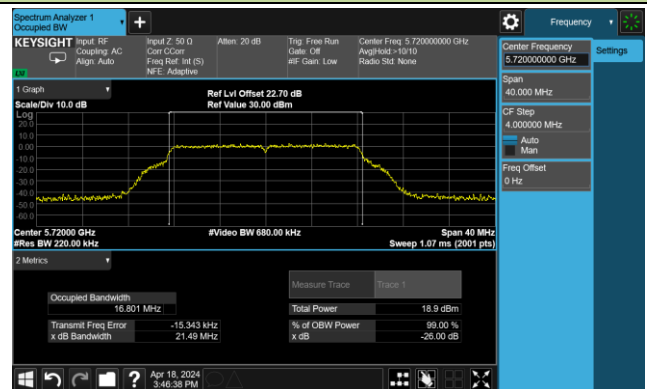


Channel 149 (5745MHz)

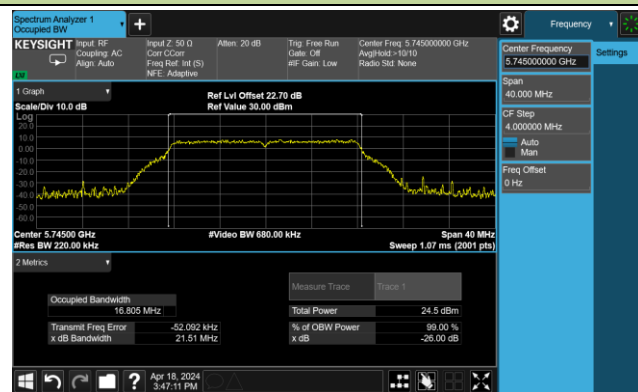

Channel 157 (5785MHz)

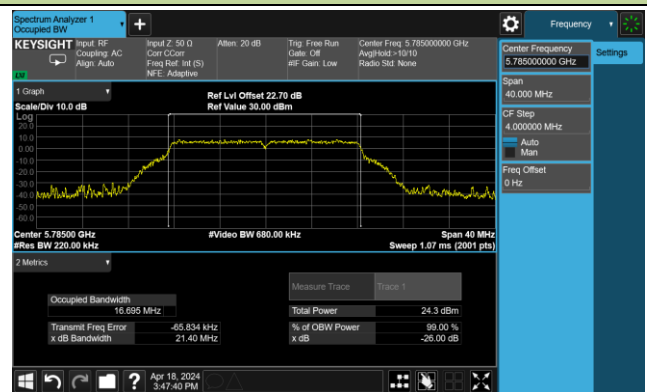


Channel 165 (5825MHz)

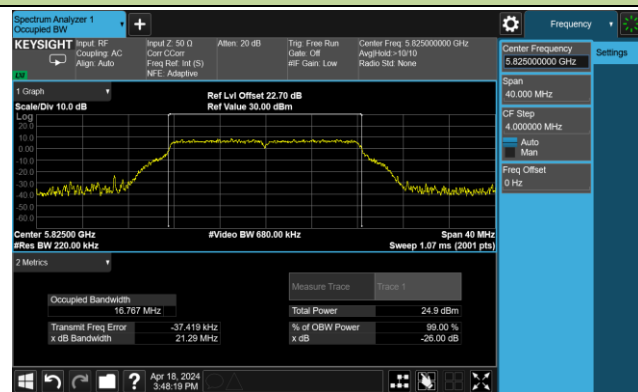


802.11ac-VHT20 26dB Bandwidth& 99% Bandwidth


Channel 36 (5180MHz)

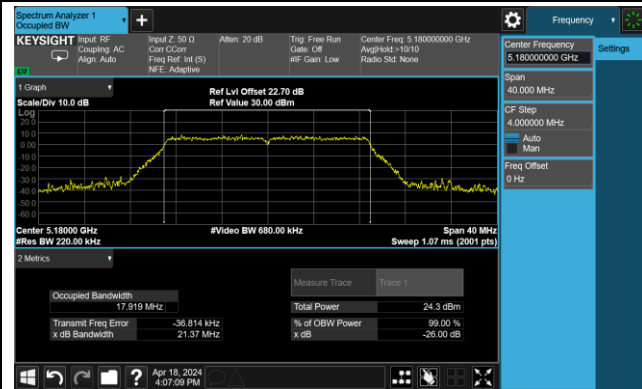


Channel 44 (5220MHz)

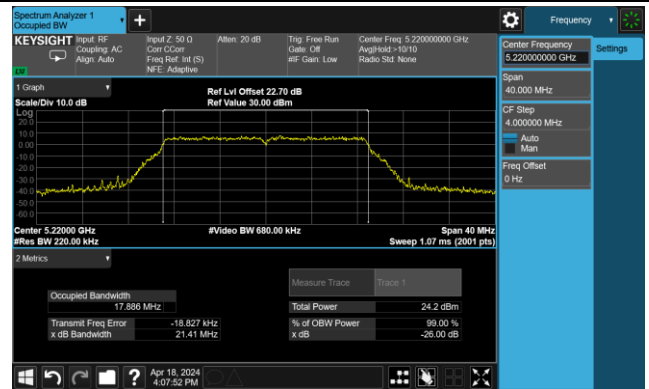


Channel 48 (5240MHz)

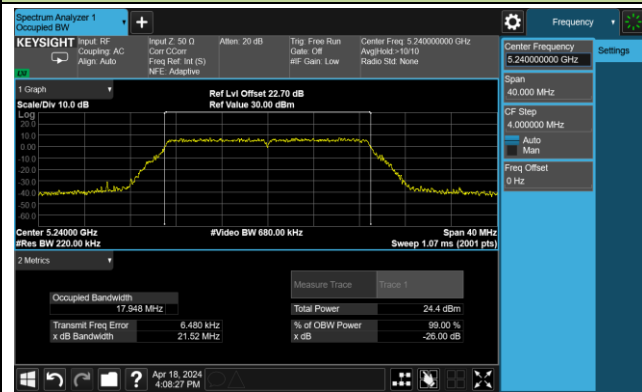


Channel 52 (5260MHz)

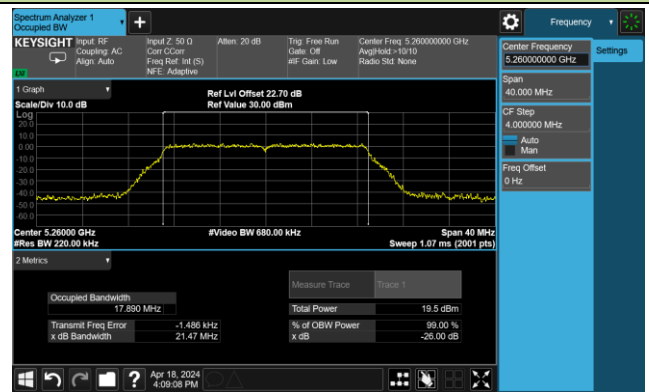


Channel 60 (5300MHz)

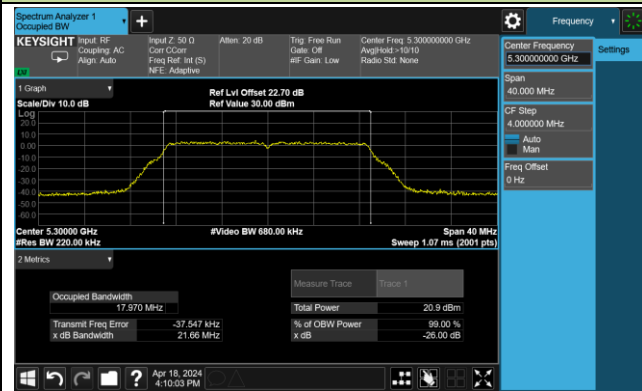


Channel 64 (5320MHz)

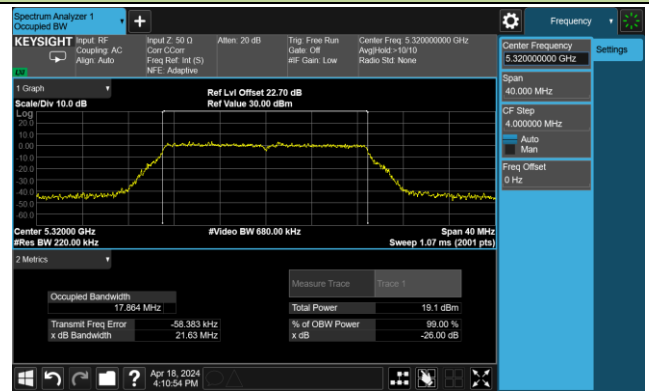

Channel 100 (5500MHz)

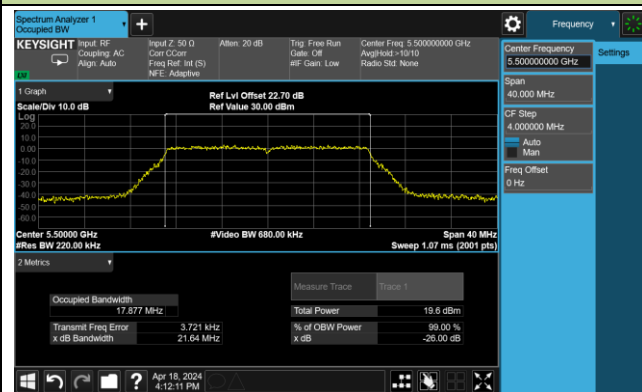


Channel 116 (5580MHz)

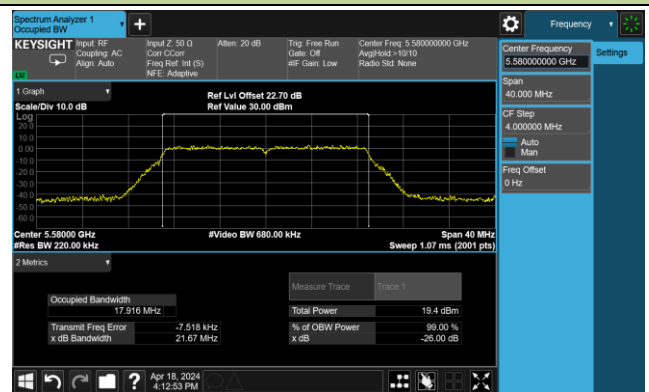


802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth


Channel 140 (5700MHz)

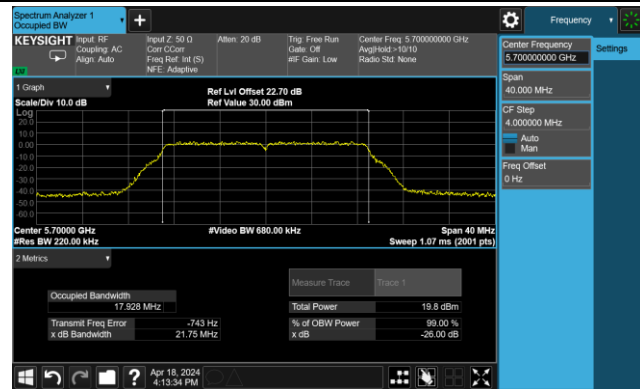


Channel 144 (5720MHz)

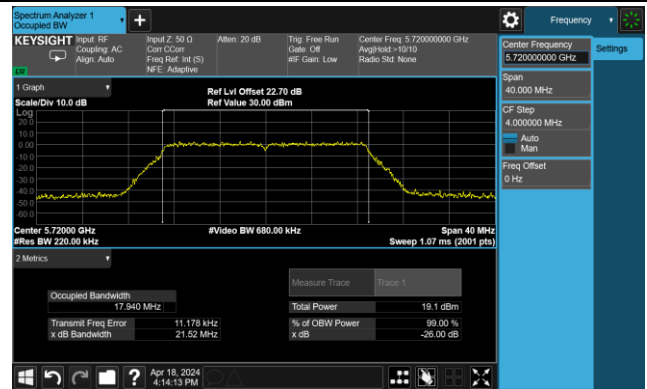


Channel 149 (5745MHz)

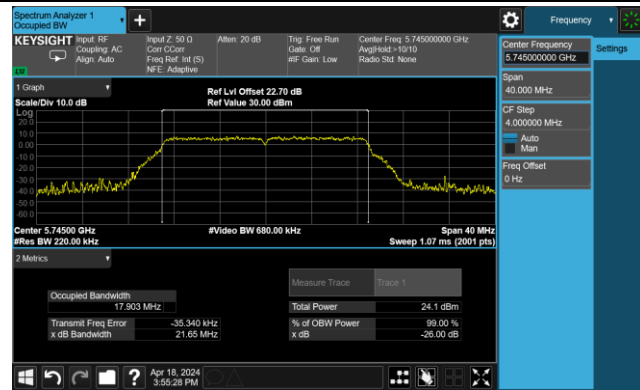

Channel 157 (5785MHz)

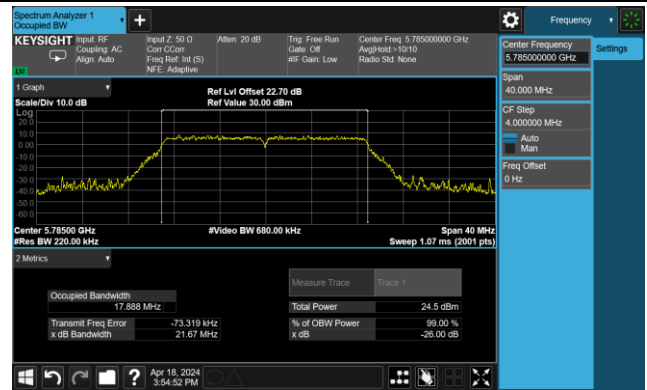


Channel 165 (5825MHz)

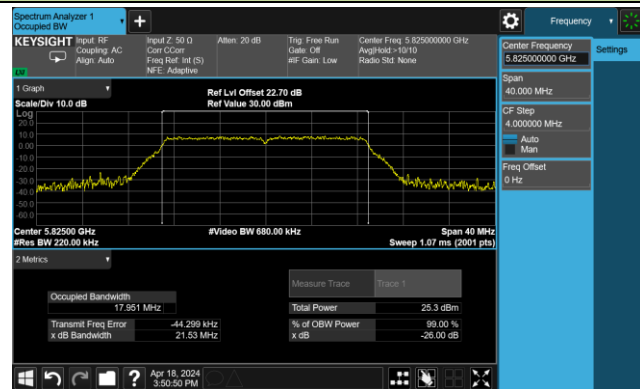


802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth


Channel 38 (5190MHz)

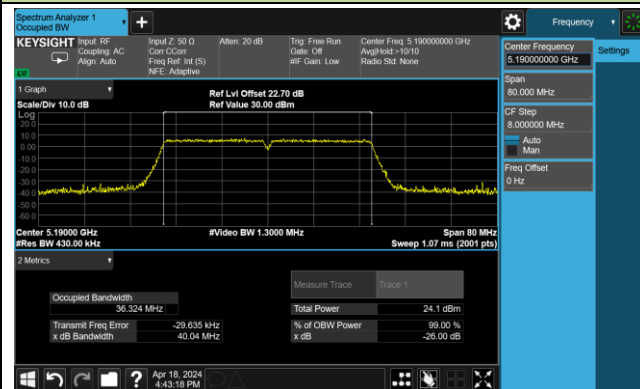


Channel 46 (5230MHz)

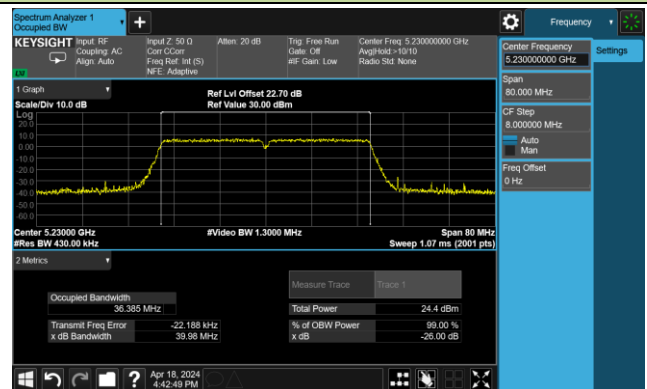


Channel 54 (5270MHz)

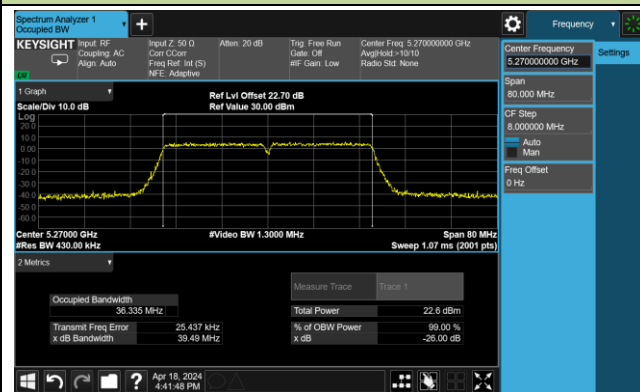


Channel 62 (5310MHz)

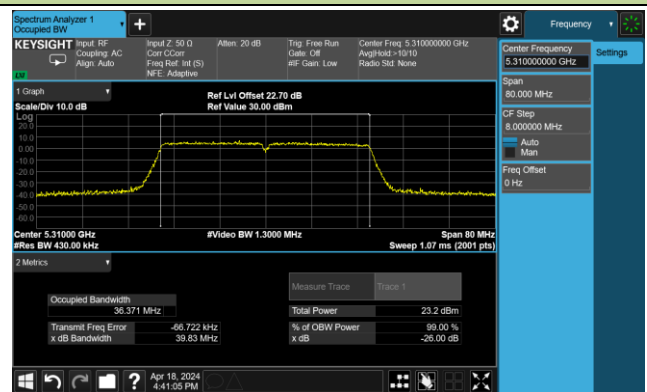


Channel 102 (5510MHz)

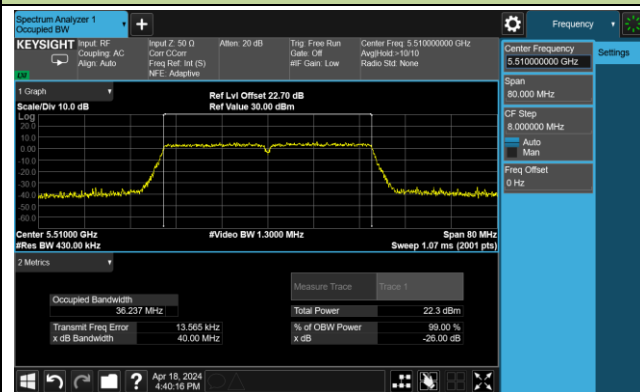


Channel 110 (5550MHz)

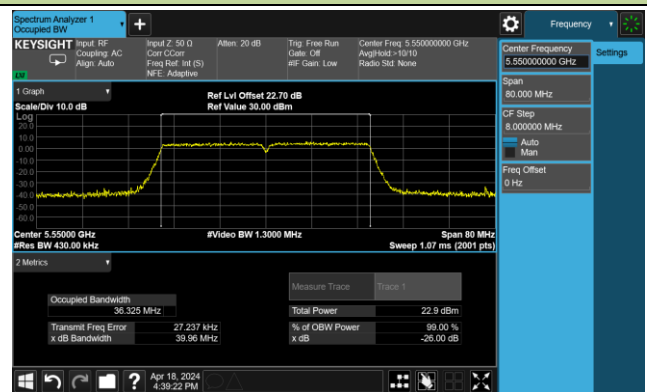


Channel 134 (5670MHz)

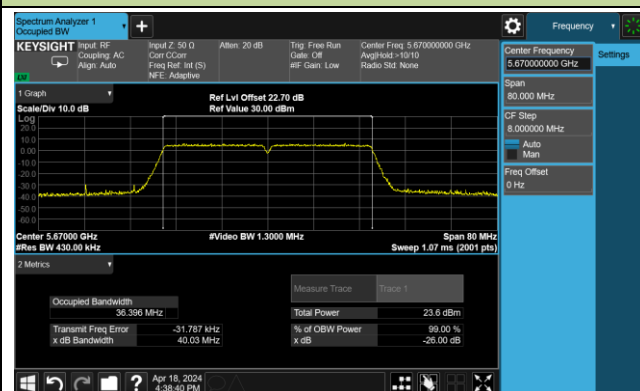


Channel 142 (5710MHz)

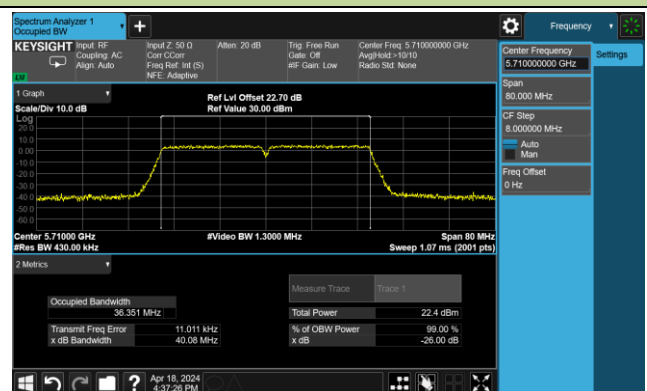

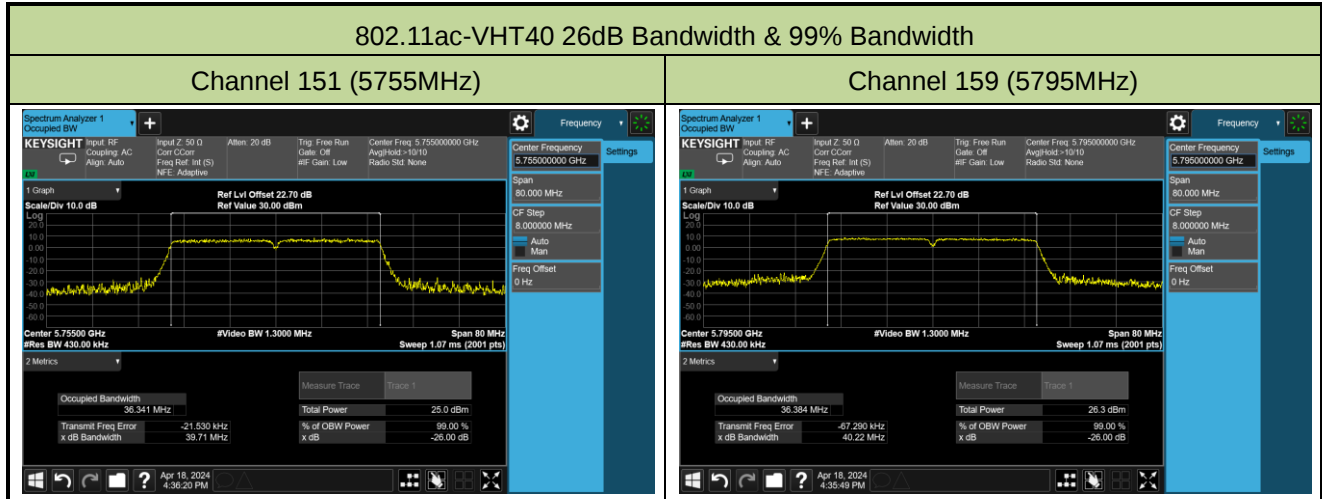


802.11ac-VHT80 26dB Bandwidth & 99% Bandwidth


Channel 42 (5210MHz)

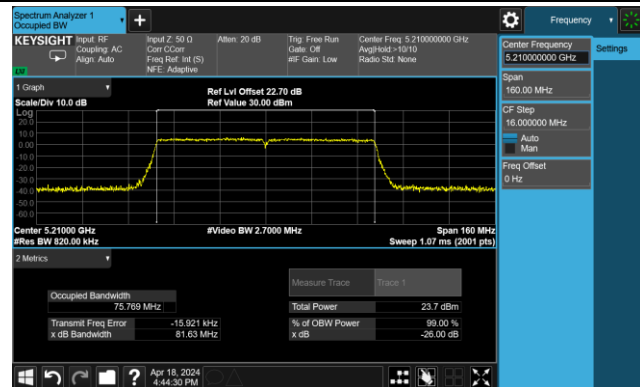


Channel 58 (5290MHz)

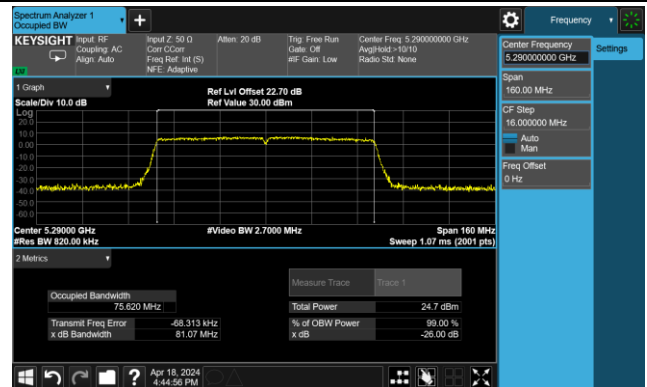


Channel 106 (5530MHz)

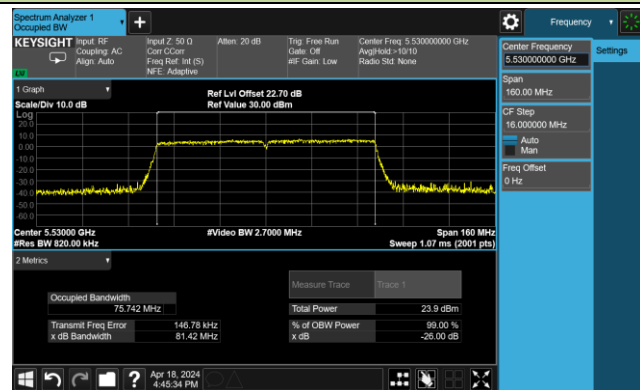


Channel 122 (5610MHz)

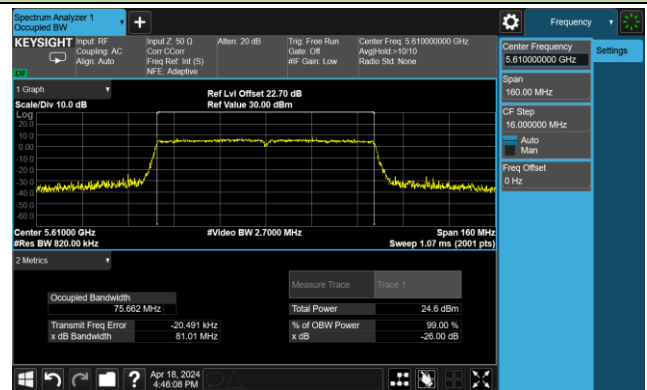

Channel 138 (5690MHz)

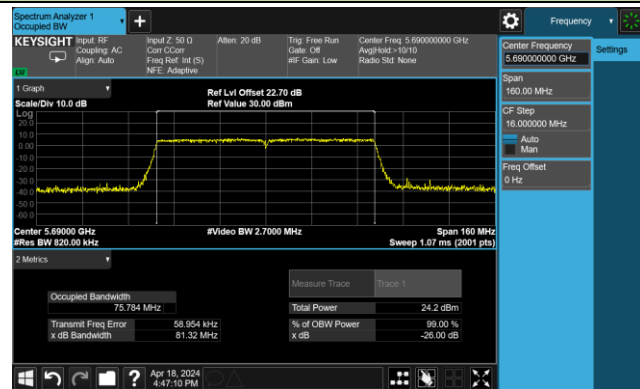


Channel 155 (5775MHz)

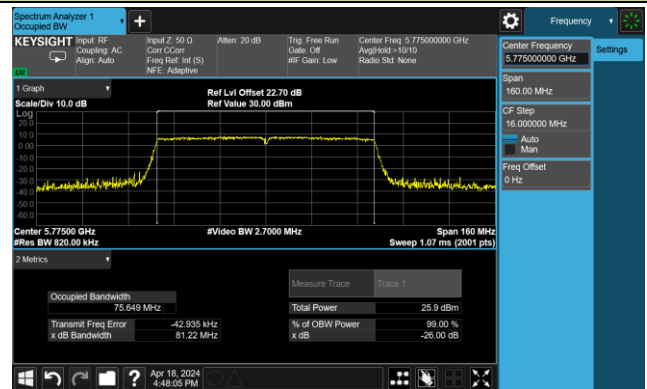


802.11ac-VHT160 26dB Bandwidth & 99% Bandwidth

Channel 50 (5250MHz)

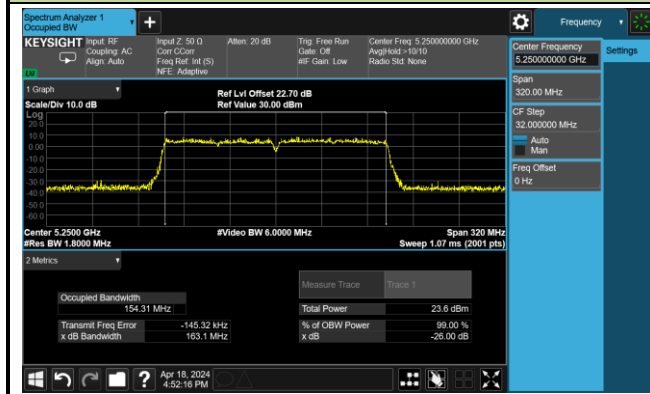


Channel 114 (5570MHz)

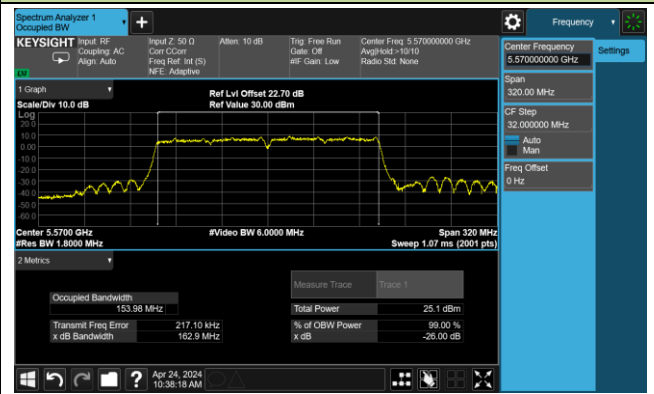


802.11ax-HE20 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

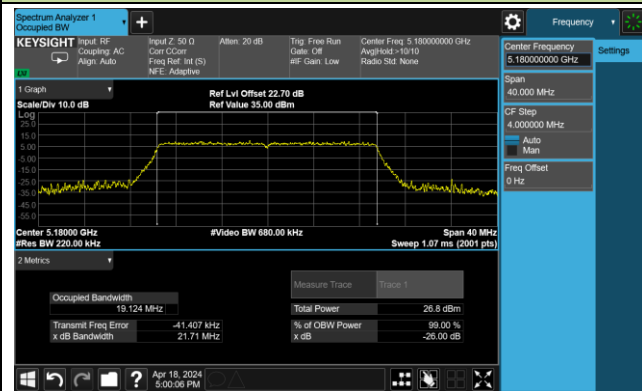


Channel 44 (5220MHz)

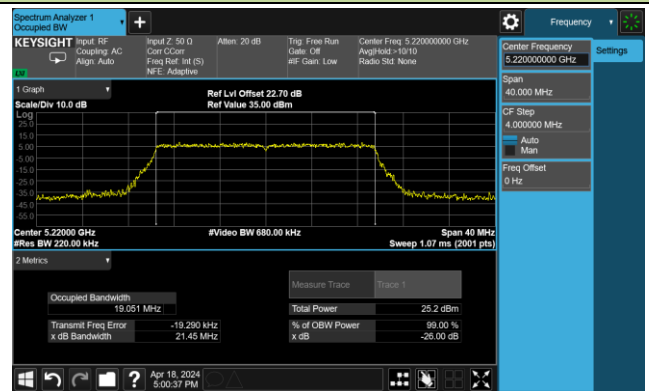


Channel 48 (5240MHz)

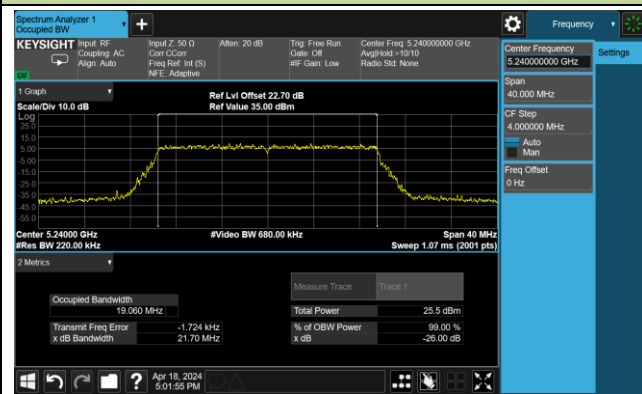


Channel 52 (5260MHz)

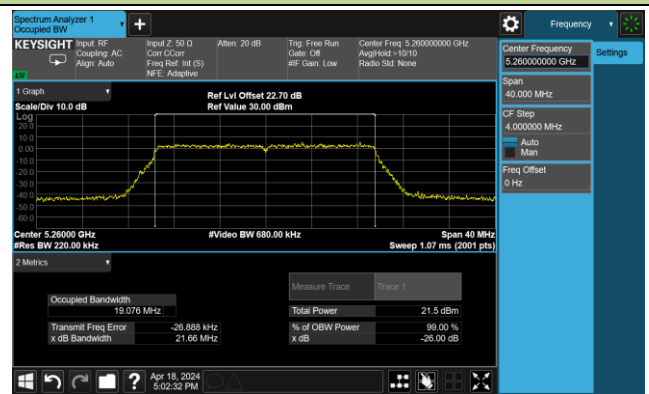


Channel 60 (5300MHz)

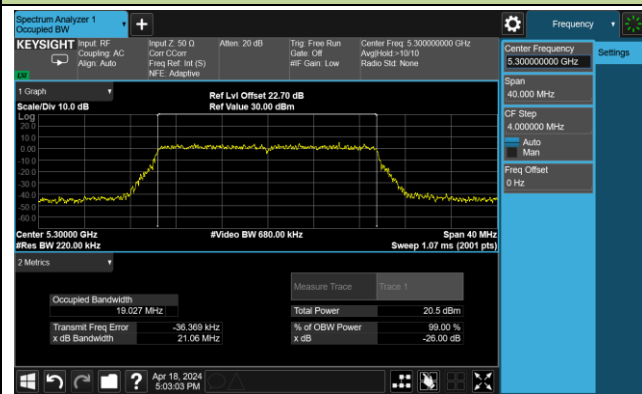

Channel 64 (5320MHz)

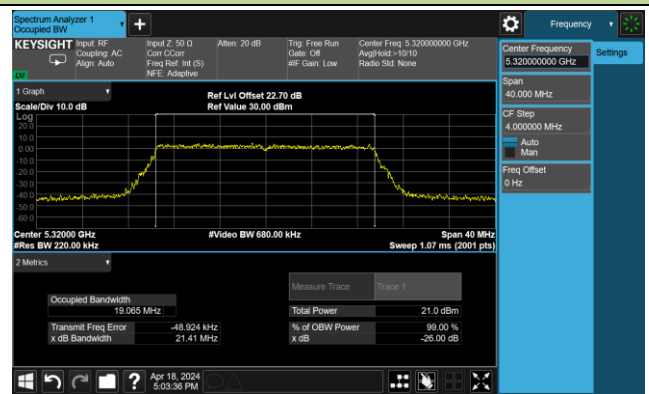

Channel 100 (5500MHz)

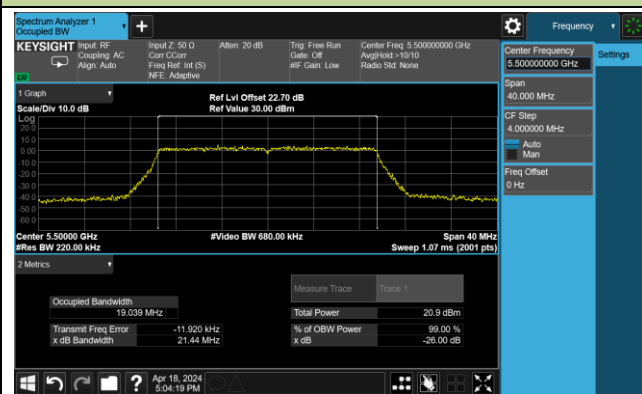

Channel 116 (5580MHz)

