

RF MEASUREMENT REPORT

FCC ID : Q9DAPIN0755A
Applicant : Hewlett Packard Enterprise Company
Application Type : Certification
Product : ACCESS POINT
Model No. : APIN0755A
Brand Name : 
Hewlett Packard
Enterprise
FCC Classification : 15E 6GHz Low Power Indoor Access Point (6ID)
FCC Rule Part(s) : Part 15 Subpart E (Section 15.407)
Received Date : December 9, 2024
Test Date : January 2, 2025~February 26, 2025

Tested By : Owen Tsai
(Owen Tsai)
Reviewed By : Paddy Chen
(Paddy Chen)
Approved By : Chenz Ker
(Chenz Ker)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB789033. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2412TW0107-U6	1.0	Original Report	2025-02-03	

CONTENTS

Description	Page
1. INTRODUCTION	7
1.1. Scope	7
1.2. MRT Test Location.....	7
2. Product Information	8
2.1. Equipment Description.....	8
2.2. Radio Specification	9
2.3. Description of Antenna RF Port	10
2.4. Antenna Details.....	11
2.5. Working Frequencies	12
2.6. Test Mode	13
2.7. Test System Connection Diagram	15
2.8. Test System Details	15
2.9. Test Software	16
2.10. Applied Standards.....	16
3. Antenna Requirements	17
4. Measuring Instrument	18
5. Measurement Uncertainty.....	19
6. Test Result.....	20
6.1. Summary	20
6.2. 26dB Bandwidth	22
6.2.1. Test Limit.....	22
6.2.2. Test Procedure used.....	22
6.2.3. Test Setting	22
6.2.4. Test Setup.....	23
6.2.5. Test Result	24
6.3. Output Power	26
6.3.1. Test Limit	26
6.3.2. Test Procedure Used	26
6.3.3. Test Setting	26
6.3.4. Test Setup	27
6.3.5. Test Result	28
6.4. Power Spectral Density.....	36
6.4.1. Test Limit	36
6.4.2. Test Procedure Used	36
6.4.3. Test Setting	36

6.4.4.	Test Setup	37
6.4.5.	Test Result	38
6.5.	In-Band Emission Measurement.....	40
6.5.1.	Test Limit	40
6.5.2.	Test Procedure used	40
6.5.3.	Test Setting	40
6.5.4.	Test Setup	41
6.5.5.	Test Result	42
6.6.	Frequency Stability Measurement	44
6.6.1.	Test Limit	44
6.6.2.	Test Procedure	44
6.6.3.	Test Setup	45
6.6.4.	Test Result	46
6.7.	Contention Based Protocol	47
6.7.1.	Test Limit	47
6.7.2.	Test Procedure Used	47
6.7.3.	Test Setting	47
6.7.4.	Test Setup	48
6.7.5.	Test Result	49
6.8.	Radiated Spurious Emission.....	51
6.8.1.	Test Limit	51
6.8.2.	Test Procedure Used	51
6.8.3.	Test Setting	51
6.8.4.	Test Setup	53
6.8.5.	Test Result	54
6.9.	Radiated Restricted Band Edge	58
6.9.1.	Test Limit	58
6.9.2.	Test Procedure Used	59
6.9.3.	Test Setting	59
6.9.4.	Test Setup	60
6.9.5.	Test Result	61
6.10.	AC Conducted Emissions	69
6.10.1.	Test Limit.....	69
6.10.2.	Test Setup.....	69
6.10.3.	Test Result.....	70
7.	Conclusion	72
	Appendix A : Test Setup Photograph	73
	Appendix B : External Photograph	73

Appendix C : Internal Photograph	73
---	-----------

General Information

Applicant	Hewlett Packard Enterprise Company
Applicant Address	6280 America Center Drive, San Jose CA 95002, United States
Manufacturer	Hewlett Packard Enterprise Company
Manufacturer Address	6280 America Center Drive, San Jose CA 95002, United States
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082

Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Canada, EU and TELECOM Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

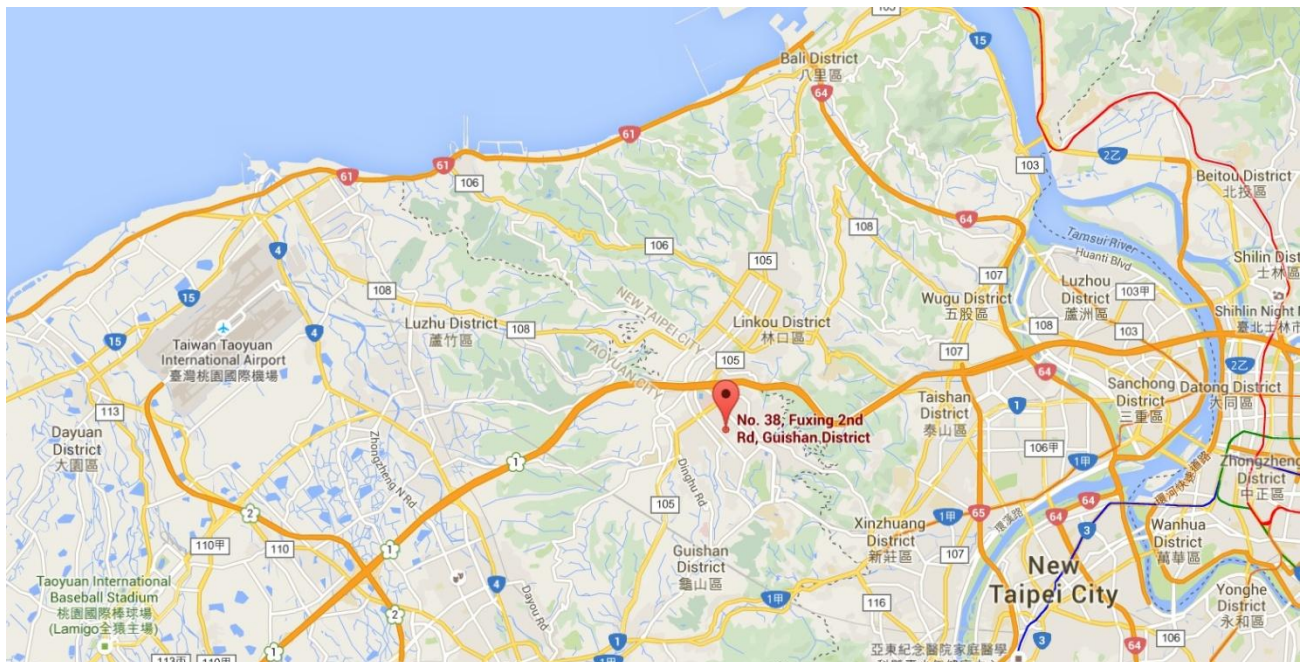

2. Product Information


2.1. Equipment Description

Product Name	ACCESS POINT
Model No.	APIN0755A
Serial No.	Radiated Sample: VNSYML300R
	Conducted Sample: VNSYML3008
Software Version	v0.4.6
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be
Bluetooth Specification	BLE only
ZigBee Specification	802.15.4
GNSS Specification	GPS, Galileo
Power Supply	AC/DC Adapter and PoE Injector Input
Operating Environment	Indoor Use
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

2.2. Radio Specification

Frequency Range	For 802.11ax-HE20/be-EHT20: 5955 ~ 7095MHz For 802.11ax-HE40/be-EHT40: 5965 ~ 7085MHz For 802.11ax-HE80/be-EHT80: 5985 ~ 7025MHz For 802.11ax-HE160/be-EHT160: 6025 ~ 6985MHz For 802.11be-EHT320: 6105MHz, 6425MHz, 6745MHz, 6265MHz, 6585MHz, 6905MHz		
Type of Modulation	802.11ax/be: OFDMA		
Data Rate	802.11ax: up to 2402Mbps 802.11be: up to 5764Mbps		
Support RU	☒ Full RU	☐ Partial RU	☐ Single RU
			☐ Multi RU
			☐ Channel Puncturing

2.3. Description of Antenna RF Port

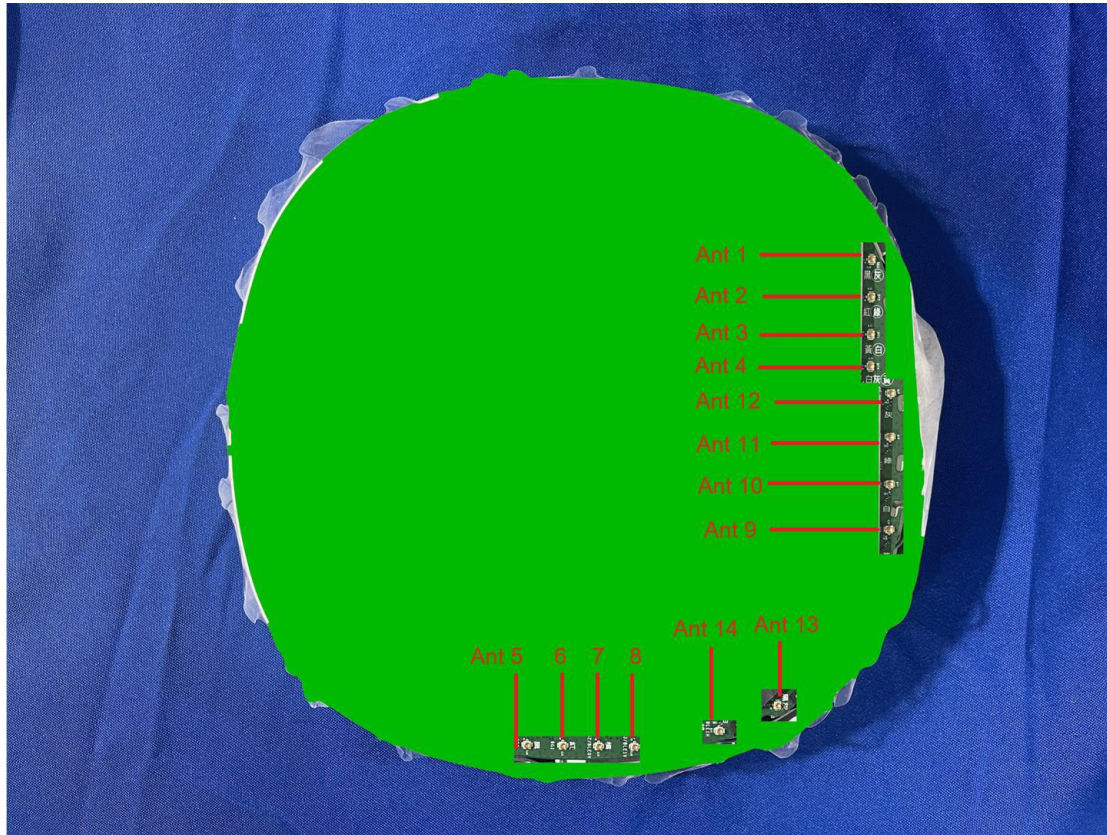

Antenna Port	RF Spec.			
	Wi-Fi 2.4G	Wi-Fi 5G	Wi-Fi 6G	BLE/ZigBee
Ant 1	--	● (Radio 1)	--	--
Ant 2	--	● (Radio 1)	--	--
Ant 3	--	● (Radio 1)	--	--
Ant 4	--	● (Radio 1)	--	--
Ant 5	--	--	● (Radio 0)	--
Ant 6	--	--	● (Radio 0)	--
Ant 7	--	--	● (Radio 0)	● (Core 0)
Ant 8	--	--	● (Radio 0)	● (Core 1)
Ant 9	● (Radio 2)	--	--	--
Ant 10	● (Radio 2)	--	--	--
Ant 11	● (Radio 2)	--	--	--
Ant 12	● (Radio 2)	--	--	--
Ant 13	GNSS			
Ant 14	--	--	--	● (Core 1)

2.4. Antenna Details

Antenna Type	Wi-Fi Antenna	Frequency Band (GHz)	TX Paths	Directional Gain (dBi)		
				Nss= 1		Nss= 4
				For Power	For PSD	For Power and PSD
Alford Loop	Ant 5	5.925 ~ 7.125	4	3.60	9.40	3.60
Alford Loop	Ant 6					
PIFA	Ant 7					
PIFA	Ant 8					

Note:

1. The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.
2. The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac/ax/be, not include 802.11a/b/g.
3. For beamforming operation, Aruba OS automatically backs power down based on CDD power.
4. The detail calculation method of directional gain refers to antenna specification provided by the applicant.

2.5. Working Frequencies

802.11ax-HE20/be-EHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	5955 MHz	5	5975 MHz	9	5995 MHz
13	6015 MHz	17	6035 MHz	21	6055 MHz
25	6075 MHz	29	6095 MHz	33	6115 MHz
37	6135 MHz	41	6155 MHz	45	6175 MHz
49	6195 MHz	53	6215 MHz	57	6235 MHz
61	6255 MHz	65	6275 MHz	69	6295 MHz
73	6315 MHz	77	6335 MHz	81	6355 MHz
85	6375 MHz	89	6395 MHz	93	6415 MHz
97	6435 MHz	101	6455 MHz	105	6475 MHz
109	5495 MHz	113	6515 MHz	117	6535 MHz
121	6555 MHz	125	6575 MHz	129	6595 MHz
133	6615 MHz	137	6635 MHz	141	6655 MHz
145	6675 MHz	149	6695 MHz	153	6715 MHz
157	6735 MHz	161	6755 MHz	165	6775 MHz
169	6795 MHz	173	6815 MHz	177	6835 MHz
181	6855 MHz	185	6875 MHz	189	6895 MHz
193	6915 MHz	197	6935 MHz	201	6955 MHz
205	6975 MHz	209	6995 MHz	213	7015 MHz
217	7035 MHz	221	7055 MHz	225	7075 MHz
225	7075 MHz	229	7095 MHz	--	--

802.11ax-HE40/be-EHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
3	5965 MHz	11	6005 MHz	19	6045 MHz
27	6085 MHz	35	6125 MHz	43	6165 MHz
51	6205 MHz	59	6245 MHz	67	6285 MHz
75	6325 MHz	83	6365 MHz	91	6405 MHz
99	6445 MHz	107	6485 MHz	115	6525 MHz
123	6565 MHz	131	6605 MHz	139	6645 MHz
147	6685 MHz	155	6725 MHz	163	6765 MHz
171	6805 MHz	179	6845 MHz	187	6885 MHz

195	6925 MHz	203	6965 MHz	211	7005 MHz
219	7045 MHz	227	7085 MHz	--	--

802.11ax-HE80/be-EHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
7	5985 MHz	23	6065 MHz	39	6145 MHz
55	6225 MHz	71	6305 MHz	87	6385 MHz
103	6465 MHz	119	6545 MHz	135	6625 MHz
151	6705 MHz	167	6785 MHz	183	6865 MHz
199	6945 MHz	215	7025 MHz	--	--

802.11ax-HE160/be-EHT160

Channel	Frequency	Channel	Frequency	Channel	Frequency
15	6025 MHz	47	6185 MHz	79	6345 MHz
111	6505 MHz	143	6665 MHz	175	6825 MHz
207	6985 MHz	--	--	--	--

802.11be-EHT320

Channel	Frequency	Channel	Frequency	Channel	Frequency
31	6105 MHz	63	6265 MHz	95	6425 MHz
127	6585 MHz	159	6745 MHz	191	6905 MHz

Test Mode


Mode 1: Transmit by 802.11ax-HE20_Nss=4 (MCS0)
Mode 2: Transmit by 802.11ax-HE40_Nss=4 (MCS0)
Mode 3: Transmit by 802.11ax-HE80_Nss=4 (MCS0)
Mode 4: Transmit by 802.11ax-HE160_Nss=4 (MCS0)
Mode 5: Transmit by 802.11be-EHT20_Nss=4 (MCS0)
Mode 6: Transmit by 802.11be-EHT40_Nss=4 (MCS0)
Mode 7: Transmit by 802.11be-EHT80_Nss=4 (MCS0)
Mode 8: Transmit by 802.11be-EHT160_Nss=4 (MCS0)
Mode 9: Transmit by 802.11be-EHT320_Nss=4 (MCS0)
Remark:
1. For Radiated emission, the modulation and the data rate picked for testing are determined by the Max. RF

conducted power.

2. For CDD mode, this device supports 4 Nss and power level is the same of spatial multiplexing. The worst case is Nss=4.
3. For beamforming operation, manufacturer automatically backs power down based on CDD power. Therefore, only the CDD mode was evaluated in this report.

2.7. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

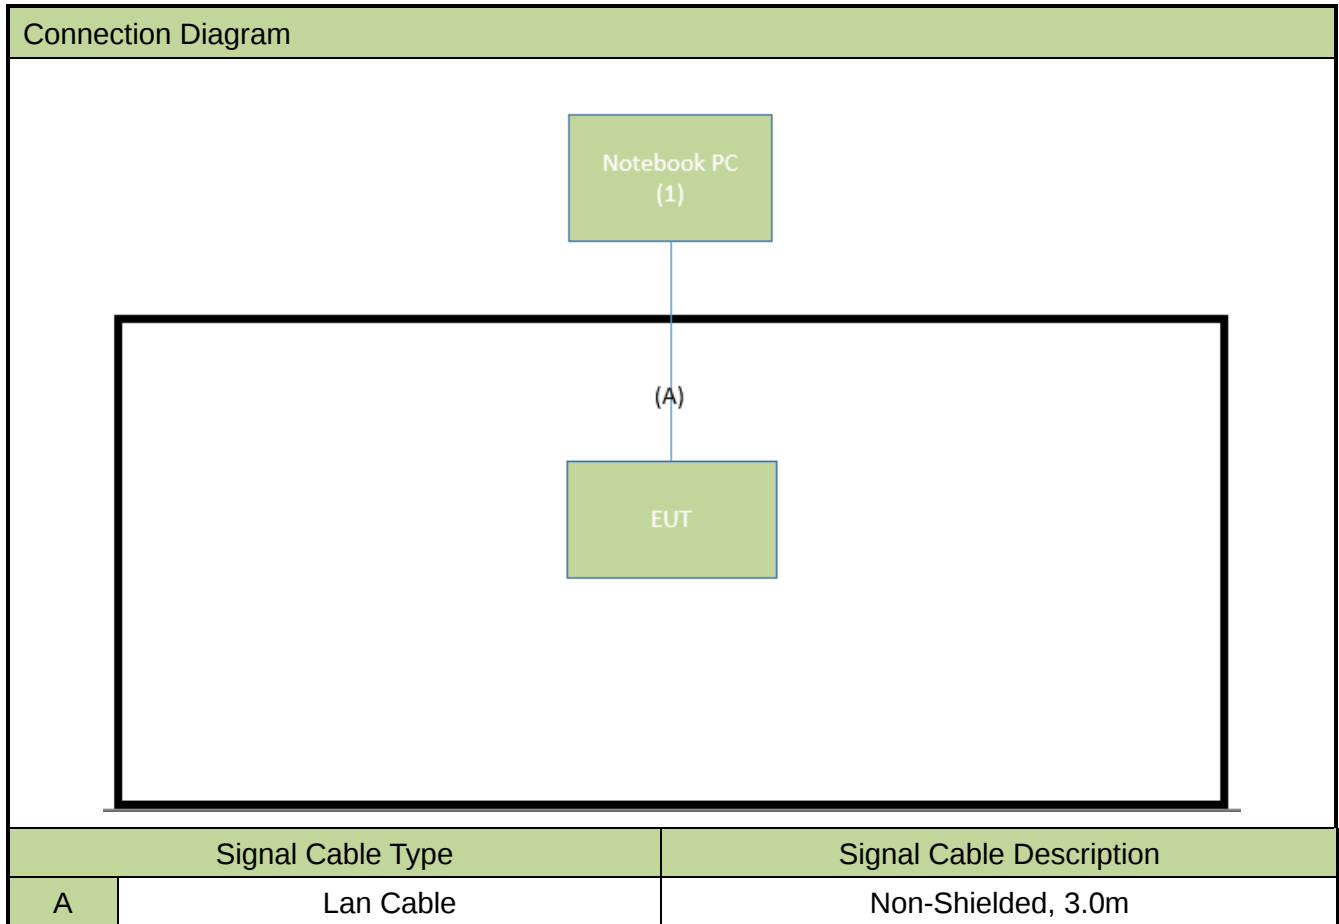

2.8. Test System Details

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	Lenovo	V14 G3 ABA	N/A	Non-shielded, 0.8m

2.9. Test Software

The test utility software used during testing was “accessMTool”, and the version was 3.3.0.6.

Note: Final power setting please refer to operational description.

2.10. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.10-2013
- FCC KDB 789033 D02v02r01
- FCC KDB 987594 D02v02r01
- FCC KDB 987594 D04v02
- FCC KDB 662911 D01v02r01

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

The antenna of the device is built in and locked inside the enclosure.

Conclusion:

The device complies with the requirement of §15.407(a)(9).

4. Measuring Instrument

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2025/5/7
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2025/11/5
Broadband Hornantenna	RFSPIN	DRH18-E	MRTTWA00087	1 year	2025/5/20
Broadband Preamplifier	EMC Instruments corporation	EMC118A45SE	MRTTWA00088	1 year	2025/5/14
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2025/3/26
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2025/3/21
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2025/3/5
Signal Analyzer	R&S	FSVA3044	MRTTWA00092	1 year	2025/6/20

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2025/9/24
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2025/8/12
USB Wideband Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2025/4/16
Vector Signal Generator	KEYSIGHT	N5182B	MRTTWA00010	1 year	2025/5/21
EXA Analog Signal Generator	KEYSIGHT	N5173B	MRTTWA00072	1 year	2025/5/21

Software	Manufacturer	Version No.
e3	Audix	9.160520a

5. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 150kHz~30MHz: $\pm 2.53\text{dB}$
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz ~ 1GHz: $\pm 4.25\text{dB}$ 1GHz ~ 40GHz: $\pm 4.45\text{dB}$
Conducted Power (Carrier Power / Power Density)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.84\text{dB}$
Conducted Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 2.65\text{ dB}$
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 3.3\%$
Temp. / Humidity
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.82^\circ\text{C} / \pm 3\%$
Frequency Error
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 78.4\text{Hz}$

6. Test Result

6.1. Summary

Product Name: ACCESS POINT
Reference Device: Q9DAPIN0755
Variant Device: Q9DAPIN0755A
Key differences: Part substitution for 5G and 6G passive filter

FCC Section(s)	Test Description	Test Condition	Data Referencing	Verdict	Reference
15.407(a)	26dB Bandwidth	Conducted	Y	Pass	Section 6.2
15.407(a)(5), (a)(6)	Maximum Equivalent Isotropically Radiated Power (E.I.R.P)	Radiated	Y	Pass	Pointer to spot-check exhibit / Section 6.3
15.407(a)(5), (a)(6)	Peak Power Spectral Density (E.I.R.P)		Y	Pass	Pointer to spot-check exhibit / Section 6.4
15.407(b)(6)	In-Band Emission	Conducted	Y	Pass	Section 6.5
15.407(g)	Frequency Stability		Y	Pass	Section 6.6
15.407(d)(6)	Contention-Based Protocol		Y	Pass	Pointer to spot-check exhibit / Section 6.7
15.407(b)(5)	Unwanted Emissions	Radiated	Y	Pass	Pointer to spot-check exhibit / Section 6.8
15.407(b)(7), (8), (9)	General Field Strength (Restricted Bands and Radiated Emission)		Y	Pass	Pointer to spot-check exhibit / Section 6.9
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Y	Pass	Section 6.10

Remark:

- Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- Output power test was verified over all data rates of each mode (data refers to operational description), and then choose the maximum power output (low data rate) for final test of each channel.
- For radiated emission test, the test results shown in the following sections represent the worst-case emissions.
- EUT supports one configuration only in 802.11ax/be full RU mode.

6. The power was fully tested, and its measured data is lower than the original report. Then spot checks were performed on the worst-case test mode based on the original report 2403RSU068-U6.

6.2. 26dB Bandwidth

6.2.1. Test Limit

N/A

6.2.2. Test Procedure used

KDB 789033 D02v02r01- Section C.1 (26dB Bandwidth)

KDB 789033 D02v02r01- Section D (99% Bandwidth)

6.2.3. Test Setting


26dB Bandwidth

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold.

99% Bandwidth


1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1% to 5% of the OBW
4. Set VBW $\geq 3 \times$ RBW
5. Detector = Peak.
6. Use the 99% power bandwidth function of the instrument.

6.2.4. Test Setup

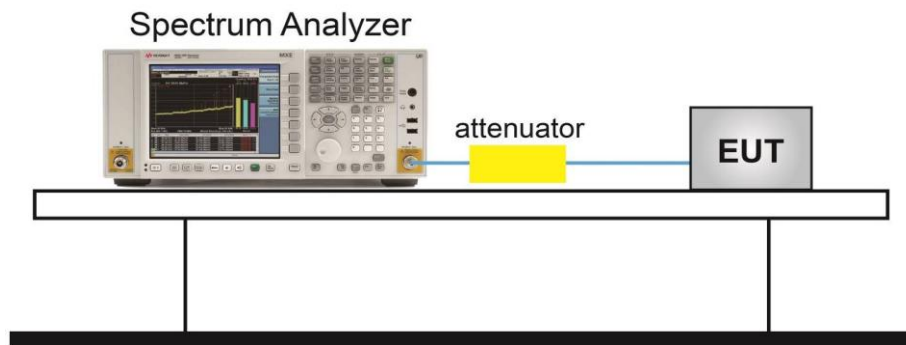


6.2.5. Test Result

Product	ACCESS POINT	Temperature	23°C
Test Engineer	AC2 / Stanley	Relative Humidity	56%
Filter Path	6GFB	Test Date	2025/2/20

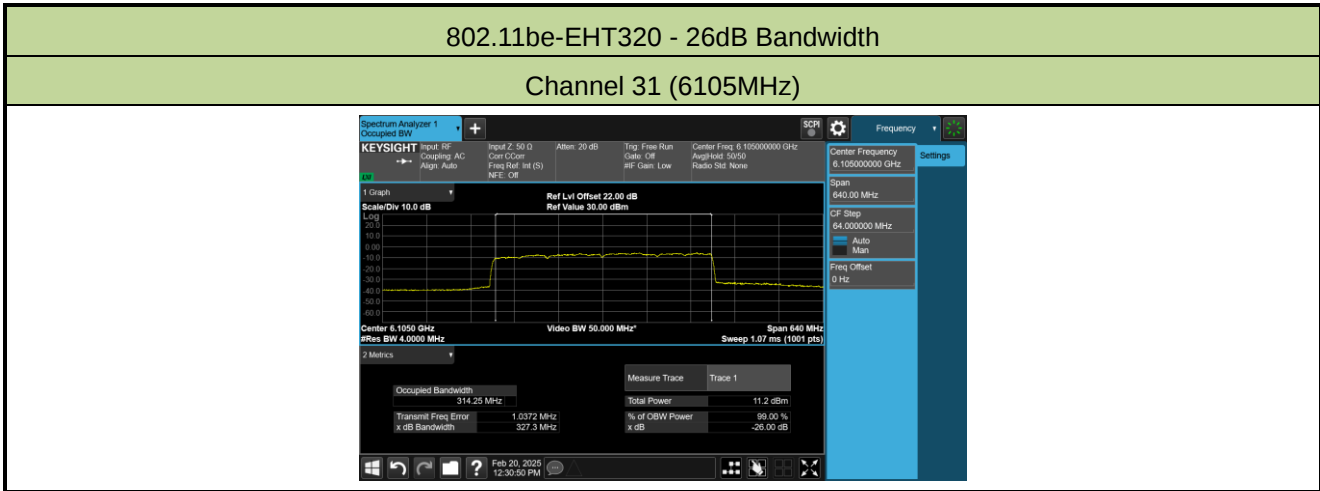

Product	ACCESS POINT	Temperature	23°C
Test Engineer	AC2 / Stanley	Relative Humidity	56%
Filter Path	6GPB	Test Date	2025/2/17

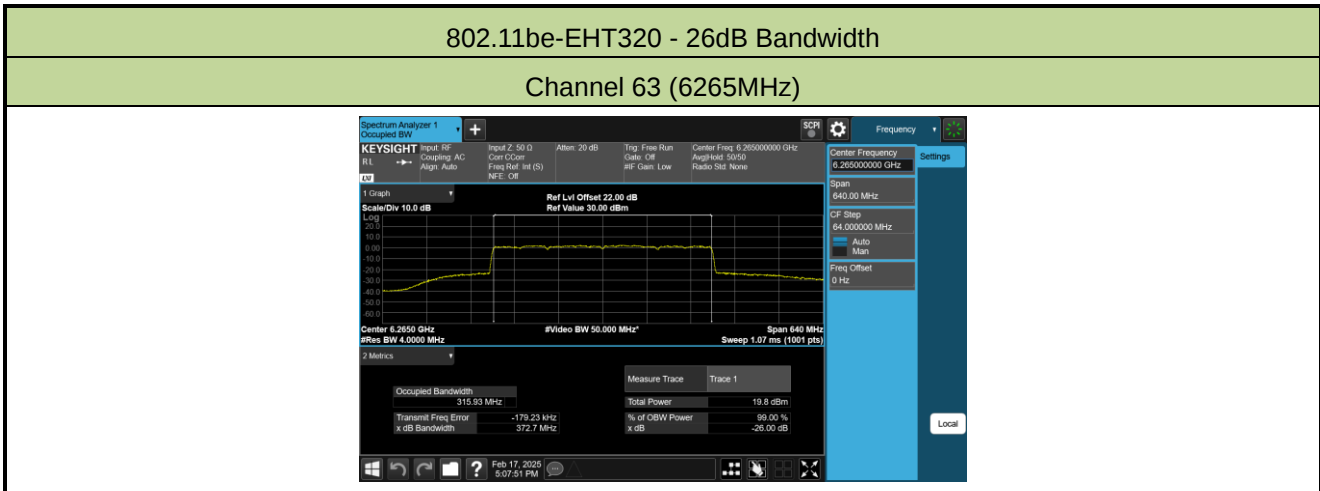

6.3. Output Power

6.3.1. Test Limit

For an indoor access point operating in the 5.925-7.125 GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

For a subordinate device operating under the control of an indoor access point in the 5.925-7.125 GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

6.3.2. Test Procedure Used

KDB 789033D02v02r01- Section II)A)1


KDB 789033D02v02r01- Section II)E)2)b) Method SA-2

6.3.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
10. Use the channel power function on the instrument to measure the power of the spectrum and record its value.
11. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle

is 25 percent..

6.3.4. Test Setup

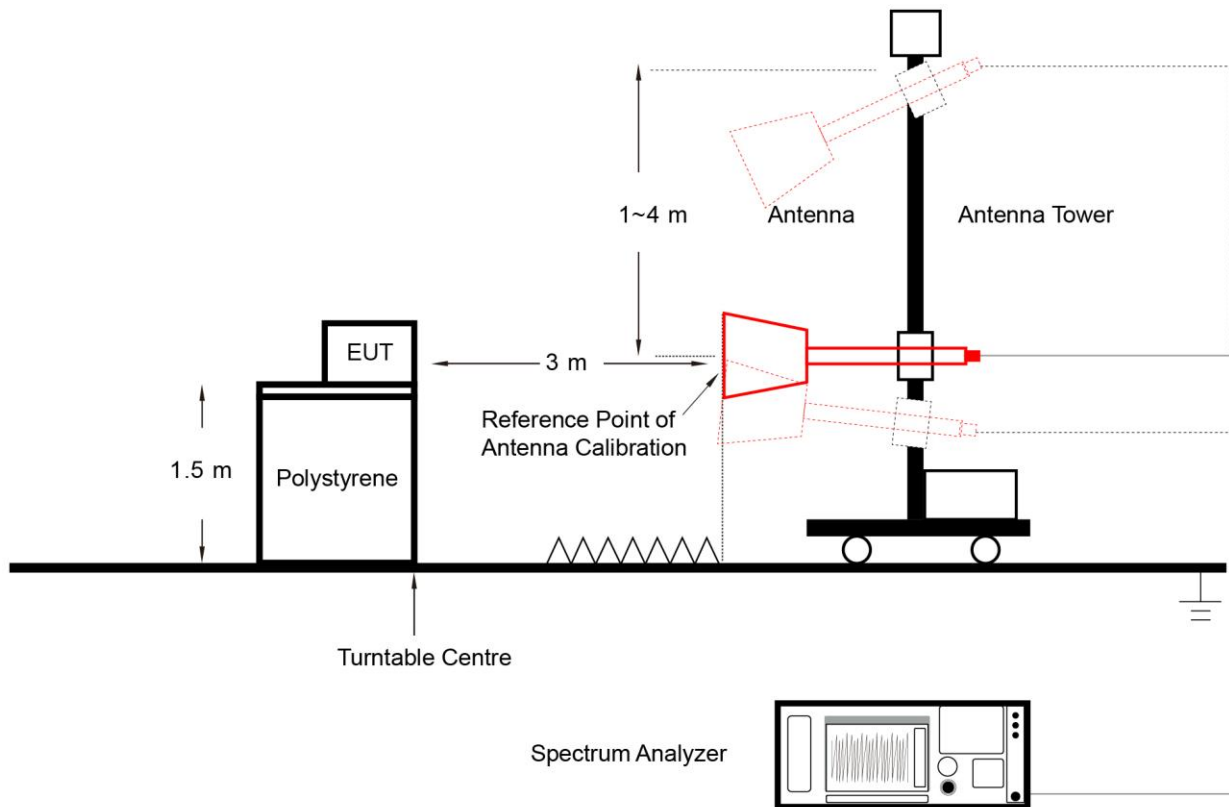

6.3.5. Test Result

Product	ACCESS POINT	Temperature	23°C
Test Engineer	AC2 / Stanley	Relative Humidity	56%
Filter Path	6GFB	Test Date	2025/1/13 ~ 2025/1/15

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dBuV/m)	EIRP (dBm)	Duty Cycle (%)	Total EIRP (dBm)	EIRP Limit (dBm)
802.11ax-HE20	MCS0	1	5955	113.00	17.80	93.06%	18.11	≤ 30.00
802.11ax-HE20	MCS0	49	6195	112.97	17.77	93.06%	18.08	≤ 30.00
802.11ax-HE20	MCS0	93	6415	113.01	17.81	93.06%	18.12	≤ 30.00
802.11ax-HE20	MCS0	97	6435	112.96	17.76	93.06%	18.07	≤ 30.00
802.11ax-HE20	MCS0	105	6475	112.88	17.68	93.06%	17.99	≤ 30.00
802.11ax-HE20	MCS0	113	6515	112.86	17.66	93.06%	17.97	≤ 30.00
802.11ax-HE20	MCS0	117	6535	112.78	17.58	93.06%	17.89	≤ 30.00
802.11ax-HE20	MCS0	149	6695	112.96	17.76	93.06%	18.07	≤ 30.00
802.11ax-HE20	MCS0	181	6855	113.02	17.82	93.06%	18.13	≤ 30.00
802.11ax-HE20	MCS0	185	6875	112.72	17.52	93.06%	17.83	≤ 30.00
802.11ax-HE20	MCS0	189	6895	112.80	17.60	93.06%	17.91	≤ 30.00
802.11ax-HE20	MCS0	213	7015	112.47	17.27	93.06%	17.58	≤ 30.00
802.11ax-HE20	MCS0	229	7095	113.00	17.80	93.06%	18.11	≤ 30.00
802.11ax-HE40	MCS0	3	5965	114.21	19.01	89.00%	19.52	≤ 30.00
802.11ax-HE40	MCS0	51	6205	114.76	19.56	89.00%	20.07	≤ 30.00
802.11ax-HE40	MCS0	91	6405	115.29	20.09	89.00%	20.60	≤ 30.00
802.11ax-HE40	MCS0	99	6445	115.48	20.28	89.00%	20.79	≤ 30.00
802.11ax-HE40	MCS0	107	6485	115.03	19.83	89.00%	20.34	≤ 30.00
802.11ax-HE40	MCS0	115	6525	115.65	20.45	89.00%	20.96	≤ 30.00
802.11ax-HE40	MCS0	123	6565	115.11	19.91	89.00%	20.42	≤ 30.00
802.11ax-HE40	MCS0	147	6685	115.59	20.39	89.00%	20.90	≤ 30.00
802.11ax-HE40	MCS0	179	6845	115.22	20.02	89.00%	20.53	≤ 30.00
802.11ax-HE40	MCS0	187	6885	115.30	20.10	89.00%	20.61	≤ 30.00
802.11ax-HE40	MCS0	195	6925	115.26	20.06	89.00%	20.57	≤ 30.00
802.11ax-HE40	MCS0	211	7005	114.65	19.45	89.00%	19.96	≤ 30.00
802.11ax-HE40	MCS0	227	7085	115.09	19.89	89.00%	20.40	≤ 30.00

Note 1: EIRP (dBm) = EIRP (dBuV/m) – 95.2.

Note 2: Total EIRP (dBm) = EIRP (dBm) + 10*log(1/duty cycle).

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dBuV/m)	EIRP (dBm)	Duty Cycle (%)	Total EIRP (dBm)	EIRP Limit (dBm)
802.11ax-HE80	MCS0	7	5985	116.45	21.25	84.23%	22.00	≤ 30.00
802.11ax-HE80	MCS0	55	6225	117.12	21.92	84.23%	22.67	≤ 30.00
802.11ax-HE80	MCS0	87	6385	117.10	21.90	84.23%	22.65	≤ 30.00
802.11ax-HE80	MCS0	103	6465	117.11	21.91	84.23%	22.66	≤ 30.00
802.11ax-HE80	MCS0	119	6545	117.87	22.67	84.23%	23.42	≤ 30.00
802.11ax-HE80	MCS0	135	6625	117.45	22.25	84.23%	23.00	≤ 30.00
802.11ax-HE80	MCS0	151	6705	117.30	22.10	84.23%	22.85	≤ 30.00
802.11ax-HE80	MCS0	167	6785	117.63	22.43	84.23%	23.18	≤ 30.00
802.11ax-HE80	MCS0	183	6865	117.60	22.40	84.23%	23.15	≤ 30.00
802.11ax-HE80	MCS0	199	6945	117.03	21.83	84.23%	22.58	≤ 30.00
802.11ax-HE80	MCS0	215	7025	117.15	21.95	84.23%	22.70	≤ 30.00
802.11ax-HE160	MCS0	15	6025	119.46	24.26	80.06%	25.23	≤ 30.00
802.11ax-HE160	MCS0	47	6185	118.45	23.25	80.06%	24.22	≤ 30.00
802.11ax-HE160	MCS0	79	6345	118.66	23.46	80.06%	24.43	≤ 30.00
802.11ax-HE160	MCS0	111	6505	119.30	24.10	80.06%	25.07	≤ 30.00
802.11ax-HE160	MCS0	143	6665	118.98	23.78	80.06%	24.75	≤ 30.00
802.11ax-HE160	MCS0	175	6825	119.43	24.23	80.06%	25.20	≤ 30.00
802.11ax-HE160	MCS0	207	6985	119.01	23.81	80.06%	24.78	≤ 30.00

Note 1: EIRP (dBm) = EIRP (dBuV/m) – 95.2.

Note 2: Total EIRP (dBm) = EIRP (dBm) + 10*log(1/duty cycle).

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dBuV/m)	EIRP (dBm)	Duty Cycle (%)	Total EIRP (dBm)	EIRP Limit (dBm)
802.11be-EHT20	MCS0	1	5955	112.70	17.50	92.95%	17.82	≤ 30.00
802.11be-EHT20	MCS0	49	6195	112.53	17.33	92.95%	17.65	≤ 30.00
802.11be-EHT20	MCS0	93	6415	112.88	17.68	92.95%	18.00	≤ 30.00
802.11be-EHT20	MCS0	97	6435	112.42	17.22	92.95%	17.54	≤ 30.00
802.11be-EHT20	MCS0	105	6475	112.56	17.36	92.95%	17.68	≤ 30.00
802.11be-EHT20	MCS0	113	6515	112.55	17.35	92.95%	17.67	≤ 30.00
802.11be-EHT20	MCS0	117	6535	112.28	17.08	92.95%	17.40	≤ 30.00
802.11be-EHT20	MCS0	149	6695	112.89	17.69	92.95%	18.01	≤ 30.00
802.11be-EHT20	MCS0	181	6855	113.03	17.83	92.95%	18.15	≤ 30.00
802.11be-EHT20	MCS0	185	6875	112.56	17.36	92.95%	17.68	≤ 30.00
802.11be-EHT20	MCS0	189	6895	112.50	17.30	92.95%	17.62	≤ 30.00
802.11be-EHT20	MCS0	213	7015	112.46	17.26	92.95%	17.58	≤ 30.00
802.11be-EHT20	MCS0	229	7095	112.70	17.50	92.95%	17.82	≤ 30.00
802.11be-EHT40	MCS0	3	5965	114.08	18.88	89.15%	19.38	≤ 30.00
802.11be-EHT40	MCS0	51	6205	115.11	19.91	89.15%	20.41	≤ 30.00
802.11be-EHT40	MCS0	91	6405	114.88	19.68	89.15%	20.18	≤ 30.00
802.11be-EHT40	MCS0	99	6445	115.16	19.96	89.15%	20.46	≤ 30.00
802.11be-EHT40	MCS0	107	6485	114.77	19.57	89.15%	20.07	≤ 30.00
802.11be-EHT40	MCS0	115	6525	115.08	19.88	89.15%	20.38	≤ 30.00
802.11be-EHT40	MCS0	123	6565	114.76	19.56	89.15%	20.06	≤ 30.00
802.11be-EHT40	MCS0	147	6685	114.72	19.52	89.15%	20.02	≤ 30.00
802.11be-EHT40	MCS0	179	6845	115.20	20.00	89.15%	20.50	≤ 30.00
802.11be-EHT40	MCS0	187	6885	115.11	19.91	89.15%	20.41	≤ 30.00
802.11be-EHT40	MCS0	195	6925	115.10	19.90	89.15%	20.40	≤ 30.00
802.11be-EHT40	MCS0	211	7005	114.74	19.54	89.15%	20.04	≤ 30.00
802.11be-EHT40	MCS0	227	7085	114.88	19.68	89.15%	20.18	≤ 30.00

Note 1: EIRP (dBm) = EIRP (dBuV/m) – 95.2.

Note 2: Total EIRP (dBm) = EIRP (dBm) + 10*log(1/duty cycle).

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dBuV/m)	EIRP (dBm)	Duty Cycle (%)	Total EIRP (dBm)	EIRP Limit (dBm)
802.11be-EHT80	MCS0	7	5985	116.10	20.90	84.62%	21.63	≤ 30.00
802.11be-EHT80	MCS0	55	6225	117.12	21.92	84.62%	22.65	≤ 30.00
802.11be-EHT80	MCS0	87	6385	116.56	21.36	84.62%	22.09	≤ 30.00
802.11be-EHT80	MCS0	103	6465	117.00	21.80	84.62%	22.53	≤ 30.00
802.11be-EHT80	MCS0	119	6545	117.59	22.39	84.62%	23.12	≤ 30.00
802.11be-EHT80	MCS0	135	6625	117.32	22.12	84.62%	22.85	≤ 30.00
802.11be-EHT80	MCS0	151	6705	117.78	22.58	84.62%	23.31	≤ 30.00
802.11be-EHT80	MCS0	167	6785	117.60	22.40	84.62%	23.13	≤ 30.00
802.11be-EHT80	MCS0	183	6865	117.53	22.33	84.62%	23.06	≤ 30.00
802.11be-EHT80	MCS0	199	6945	117.50	22.30	84.62%	23.03	≤ 30.00
802.11be-EHT80	MCS0	215	7025	116.93	21.73	84.62%	22.46	≤ 30.00
802.11be-EHT160	MCS0	15	6025	118.40	23.20	80.12%	24.16	≤ 30.00
802.11be-EHT160	MCS0	47	6185	119.63	24.43	80.12%	25.39	≤ 30.00
802.11be-EHT160	MCS0	79	6345	118.54	23.34	80.12%	24.30	≤ 30.00
802.11be-EHT160	MCS0	111	6505	118.75	23.55	80.12%	24.51	≤ 30.00
802.11be-EHT160	MCS0	143	6665	119.76	24.56	80.12%	25.52	≤ 30.00
802.11be-EHT160	MCS0	175	6825	119.35	24.15	80.12%	25.11	≤ 30.00
802.11be-EHT160	MCS0	207	6985	118.43	23.23	80.12%	24.19	≤ 30.00
802.11be-EHT320	MCS0	31	6105	119.40	24.20	77.97%	25.28	≤ 30.00
802.11be-EHT320	MCS0	63	6265	119.45	24.25	77.97%	25.33	≤ 30.00
802.11be-EHT320	MCS0	95	6425	119.73	24.53	77.97%	25.61	≤ 30.00
802.11be-EHT320	MCS0	127	6585	119.29	24.09	77.97%	25.17	≤ 30.00
802.11be-EHT320	MCS0	159	6745	118.68	23.48	77.97%	24.56	≤ 30.00
802.11be-EHT320	MCS0	191	6905	119.18	23.98	77.97%	25.06	≤ 30.00

Note 1: EIRP (dBm) = EIRP (dBuV/m) – 95.2.

Note 2: Total EIRP (dBm) = EIRP (dBm) + 10*log(1/duty cycle).

Product	ACCESS POINT	Temperature	23°C
Test Engineer	AC2 / Stanley	Relative Humidity	56%
Filter Path	6GPB	Test Date	2025/2/13 ~ 2025/2/17

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dBuV/m)	EIRP (dBm)	Duty Cycle (%)	Total EIRP (dBm)	EIRP Limit (dBm)
802.11ax-HE20	MCS0	33	6115	112.98	17.78	93.06%	18.09	≤ 30.00
802.11ax-HE20	MCS0	61	6255	112.70	17.50	93.06%	17.81	≤ 30.00
802.11ax-HE20	MCS0	93	6415	112.95	17.75	93.06%	18.06	≤ 30.00
802.11ax-HE20	MCS0	97	6435	112.70	17.50	93.06%	17.81	≤ 30.00
802.11ax-HE20	MCS0	105	6475	112.63	17.43	93.06%	17.74	≤ 30.00
802.11ax-HE20	MCS0	113	6515	112.68	17.48	93.06%	17.79	≤ 30.00
802.11ax-HE20	MCS0	117	6535	112.75	17.55	93.06%	17.86	≤ 30.00
802.11ax-HE20	MCS0	149	6695	112.76	17.56	93.06%	17.87	≤ 30.00
802.11ax-HE20	MCS0	181	6855	112.71	17.51	93.06%	17.82	≤ 30.00
802.11ax-HE20	MCS0	185	6875	112.48	17.28	93.06%	17.59	≤ 30.00
802.11ax-HE20	MCS0	189	6895	112.51	17.31	93.06%	17.62	≤ 30.00
802.11ax-HE20	MCS0	213	7015	112.21	17.01	93.06%	17.32	≤ 30.00
802.11ax-HE20	MCS0	229	7095	112.83	17.63	93.06%	17.94	≤ 30.00
802.11ax-HE40	MCS0	35	6125	114.13	18.93	89.00%	19.44	≤ 30.00
802.11ax-HE40	MCS0	59	6245	114.68	19.48	89.00%	19.99	≤ 30.00
802.11ax-HE40	MCS0	91	6405	115.02	19.82	89.00%	20.33	≤ 30.00
802.11ax-HE40	MCS0	99	6445	115.33	20.13	89.00%	20.64	≤ 30.00
802.11ax-HE40	MCS0	107	6485	114.87	19.67	89.00%	20.18	≤ 30.00
802.11ax-HE40	MCS0	115	6525	115.52	20.32	89.00%	20.83	≤ 30.00
802.11ax-HE40	MCS0	123	6565	114.68	19.48	89.00%	19.99	≤ 30.00
802.11ax-HE40	MCS0	147	6685	115.47	20.27	89.00%	20.78	≤ 30.00
802.11ax-HE40	MCS0	179	6845	115.36	20.16	89.00%	20.67	≤ 30.00
802.11ax-HE40	MCS0	187	6885	115.02	19.82	89.00%	20.33	≤ 30.00
802.11ax-HE40	MCS0	195	6925	115.11	19.91	89.00%	20.42	≤ 30.00
802.11ax-HE40	MCS0	211	7005	114.68	19.48	89.00%	19.99	≤ 30.00
802.11ax-HE40	MCS0	227	7085	115.01	19.81	89.00%	20.32	≤ 30.00

Note 1: EIRP (dBm) = EIRP (dBuV/m) – 95.2.

Note 2: Total EIRP (dBm) = EIRP (dBm) + 10*log(1/duty cycle).

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dBuV/m)	EIRP (dBm)	Duty Cycle (%)	Total EIRP (dBm)	EIRP Limit (dBm)
802.11ax-HE80	MCS0	39	6145	116.60	21.40	84.23%	22.15	≤ 30.00
802.11ax-HE80	MCS0	55	6225	117.01	21.81	84.23%	22.56	≤ 30.00
802.11ax-HE80	MCS0	87	6385	117.00	21.80	84.23%	22.55	≤ 30.00
802.11ax-HE80	MCS0	103	6465	117.02	21.82	84.23%	22.57	≤ 30.00
802.11ax-HE80	MCS0	119	6545	117.70	22.50	84.23%	23.25	≤ 30.00
802.11ax-HE80	MCS0	135	6625	117.43	22.23	84.23%	22.98	≤ 30.00
802.11ax-HE80	MCS0	151	6705	117.39	22.19	84.23%	22.94	≤ 30.00
802.11ax-HE80	MCS0	167	6785	117.48	22.28	84.23%	23.03	≤ 30.00
802.11ax-HE80	MCS0	183	6865	117.53	22.33	84.23%	23.08	≤ 30.00
802.11ax-HE80	MCS0	199	6945	117.16	21.96	84.23%	22.71	≤ 30.00
802.11ax-HE80	MCS0	215	7025	116.88	21.68	84.23%	22.43	≤ 30.00
802.11ax-HE160	MCS0	47	6185	118.47	23.27	80.06%	24.24	≤ 30.00
802.11ax-HE160	MCS0	79	6345	118.38	23.18	80.06%	24.15	≤ 30.00
802.11ax-HE160	MCS0	111	6505	119.02	23.82	80.06%	24.79	≤ 30.00
802.11ax-HE160	MCS0	143	6665	118.83	23.63	80.06%	24.60	≤ 30.00
802.11ax-HE160	MCS0	175	6825	119.39	24.19	80.06%	25.16	≤ 30.00
802.11ax-HE160	MCS0	207	6985	119.04	23.84	80.06%	24.81	≤ 30.00

Note 1: EIRP (dBm) = EIRP (dBuV/m) – 95.2.

Note 2: Total EIRP (dBm) = EIRP (dBm) + 10*log(1/duty cycle).

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dBuV/m)	EIRP (dBm)	Duty Cycle (%)	Total EIRP (dBm)	EIRP Limit (dBm)
802.11be-EHT20	MCS0	33	6115	112.80	17.60	92.95%	17.92	≤ 30.00
802.11be-EHT20	MCS0	61	6255	112.17	16.97	92.95%	17.29	≤ 30.00
802.11be-EHT20	MCS0	93	6415	112.67	17.47	92.95%	17.79	≤ 30.00
802.11be-EHT20	MCS0	97	6435	112.17	16.97	92.95%	17.29	≤ 30.00
802.11be-EHT20	MCS0	105	6475	112.32	17.12	92.95%	17.44	≤ 30.00
802.11be-EHT20	MCS0	113	6515	112.28	17.08	92.95%	17.40	≤ 30.00
802.11be-EHT20	MCS0	117	6535	112.18	16.98	92.95%	17.30	≤ 30.00
802.11be-EHT20	MCS0	149	6695	112.68	17.48	92.95%	17.80	≤ 30.00
802.11be-EHT20	MCS0	181	6855	112.71	17.51	92.95%	17.83	≤ 30.00
802.11be-EHT20	MCS0	185	6875	112.28	17.08	92.95%	17.40	≤ 30.00
802.11be-EHT20	MCS0	189	6895	112.31	17.11	92.95%	17.43	≤ 30.00
802.11be-EHT20	MCS0	213	7015	112.36	17.16	92.95%	17.48	≤ 30.00
802.11be-EHT20	MCS0	229	7095	112.69	17.49	92.95%	17.81	≤ 30.00
802.11be-EHT40	MCS0	35	6125	114.01	18.81	89.15%	19.31	≤ 30.00
802.11be-EHT40	MCS0	59	6245	115.02	19.82	89.15%	20.32	≤ 30.00
802.11be-EHT40	MCS0	91	6405	114.88	19.68	89.15%	20.18	≤ 30.00
802.11be-EHT40	MCS0	99	6445	115.02	19.82	89.15%	20.32	≤ 30.00
802.11be-EHT40	MCS0	107	6485	114.67	19.47	89.15%	19.97	≤ 30.00
802.11be-EHT40	MCS0	115	6525	114.89	19.69	89.15%	20.19	≤ 30.00
802.11be-EHT40	MCS0	123	6565	114.67	19.47	89.15%	19.97	≤ 30.00
802.11be-EHT40	MCS0	147	6685	114.59	19.39	89.15%	19.89	≤ 30.00
802.11be-EHT40	MCS0	179	6845	115.21	20.01	89.15%	20.51	≤ 30.00
802.11be-EHT40	MCS0	187	6885	115.01	19.81	89.15%	20.31	≤ 30.00
802.11be-EHT40	MCS0	195	6925	114.97	19.77	89.15%	20.27	≤ 30.00
802.11be-EHT40	MCS0	211	7005	114.85	19.65	89.15%	20.15	≤ 30.00
802.11be-EHT40	MCS0	227	7085	114.88	19.68	89.15%	20.18	≤ 30.00

Note 1: EIRP (dBm) = EIRP (dBuV/m) – 95.2.

Note 2: Total EIRP (dBm) = EIRP (dBm) + 10*log(1/duty cycle).

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dBuV/m)	EIRP (dBm)	Duty Cycle (%)	Total EIRP (dBm)	EIRP Limit (dBm)
802.11be-EHT80	MCS0	39	6145	116.00	20.80	84.62%	21.53	≤ 30.00
802.11be-EHT80	MCS0	55	6225	116.83	21.63	84.62%	22.36	≤ 30.00
802.11be-EHT80	MCS0	87	6385	116.45	21.25	84.62%	21.98	≤ 30.00
802.11be-EHT80	MCS0	103	6465	116.67	21.47	84.62%	22.20	≤ 30.00
802.11be-EHT80	MCS0	119	6545	117.35	22.15	84.62%	22.88	≤ 30.00
802.11be-EHT80	MCS0	135	6625	117.28	22.08	84.62%	22.81	≤ 30.00
802.11be-EHT80	MCS0	151	6705	117.80	22.60	84.62%	23.33	≤ 30.00
802.11be-EHT80	MCS0	167	6785	117.57	22.37	84.62%	23.10	≤ 30.00
802.11be-EHT80	MCS0	183	6865	117.38	22.18	84.62%	22.91	≤ 30.00
802.11be-EHT80	MCS0	199	6945	117.29	22.09	84.62%	22.82	≤ 30.00
802.11be-EHT80	MCS0	215	7025	116.97	21.77	84.62%	22.50	≤ 30.00
802.11be-EHT160	MCS0	47	6185	119.33	24.13	80.12%	25.09	≤ 30.00
802.11be-EHT160	MCS0	79	6345	118.38	23.18	80.12%	24.14	≤ 30.00
802.11be-EHT160	MCS0	111	6505	118.62	23.42	80.12%	24.38	≤ 30.00
802.11be-EHT160	MCS0	143	6665	119.45	24.25	80.12%	25.21	≤ 30.00
802.11be-EHT160	MCS0	175	6825	119.20	24.00	80.12%	24.96	≤ 30.00
802.11be-EHT160	MCS0	207	6985	118.29	23.09	80.12%	24.05	≤ 30.00
802.11be-EHT320	MCS0	63	6265	119.21	24.01	77.97%	25.09	≤ 30.00
802.11be-EHT320	MCS0	95	6425	119.69	24.49	77.97%	25.57	≤ 30.00
802.11be-EHT320	MCS0	127	6585	119.21	24.01	77.97%	25.09	≤ 30.00
802.11be-EHT320	MCS0	159	6745	118.86	23.66	77.97%	24.74	≤ 30.00
802.11be-EHT320	MCS0	191	6905	119.04	23.84	77.97%	24.92	≤ 30.00

Note 1: EIRP (dBm) = EIRP (dBuV/m) – 95.2.

Note 2: Total EIRP (dBm) = EIRP (dBm) + 10*log(1/duty cycle).

6.4. Power Spectral Density

6.4.1. Test Limit

For an indoor access point operating in the 5.925-7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p. in any 1-megahertz band.

For a subordinate device operating under the control of an indoor access point in the 5.925-7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p in any 1-megahertz band.

6.4.2. Test Procedure Used


KDB 789033D02v02r01- Section II)A)1

KDB 789033 D02v02r01-Section II)F

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
10. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

6.4.4. Test Setup

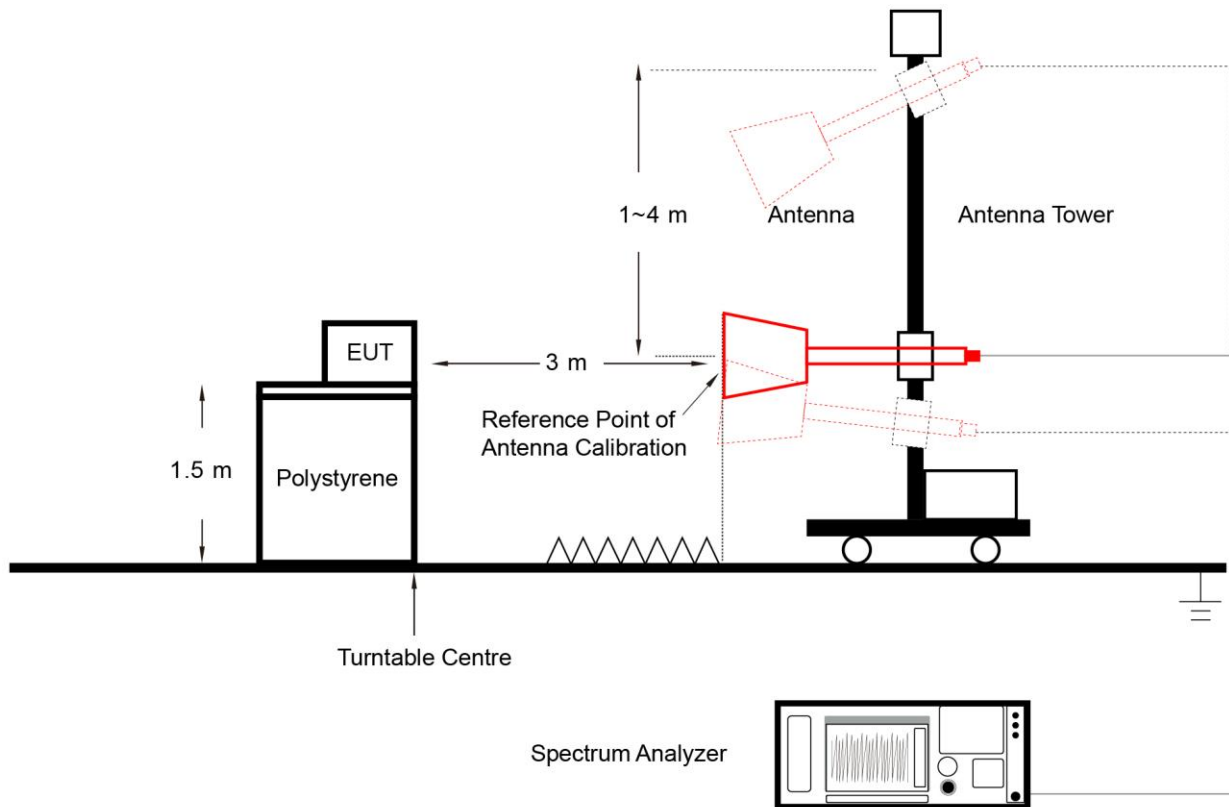


6.4.5. Test Result

Product	ACCESS POINT	Temperature	23°C
Test Engineer	AC2 / Stanley	Relative Humidity	56%
Filter Path	6GFB	Test Date	2025/1/15

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP PSD (dBuV/m/MHz)	EIRP PSD (dBm/MHz)	Duty Cycle (%)	Final EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)
802.11be-EHT320	MCS0	31	6105	97.43	2.23	77.97%	3.31	≤ 5.00

Note 1: When EUT duty cycle < 98%, EIRP PSD (dBm/MHz) = EIRP PSD (dBuV/m/MHz) -95.2 + 10*log (1/Duty Cycle).

Note 2: Final EIRP PSD (dBm/MHz) = EIRP PSD (dBm/MHz) + 10*log(1/duty cycle).

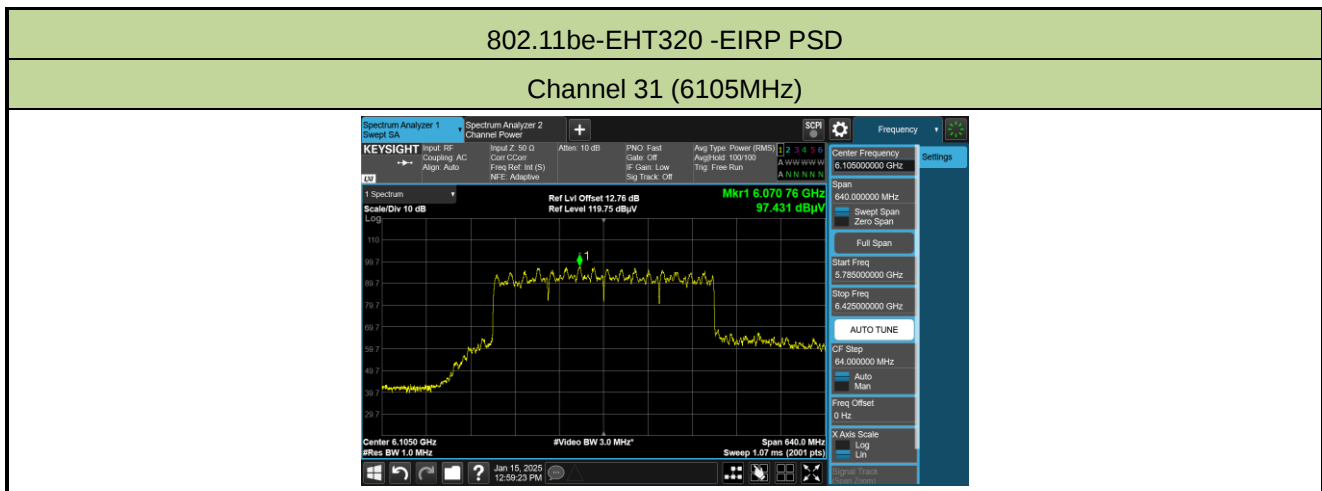


Product	ACCESS POINT	Temperature	23°C
Test Engineer	AC2 / Stanley	Relative Humidity	56%
Filter Path	6GPB	Test Date	2025/2/14

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	EIRP PSD (dBuV/m/MHz)	EIRP PSD (dBm/MHz)	Duty Cycle (%)	Final EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)
802.11be-HE320	MCS0	63	6265	97.54	2.34	77.97%	3.42	≤ 5.00

Note 1: When EUT duty cycle < 98%, EIRP PSD (dBm/MHz) = EIRP PSD (dBuV/m/MHz) -95.2 + 10*log (1/Duty Cycle).

Note 2: Final EIRP PSD (dBm/MHz) = EIRP PSD (dBm/MHz) + 10*log(1/duty cycle).

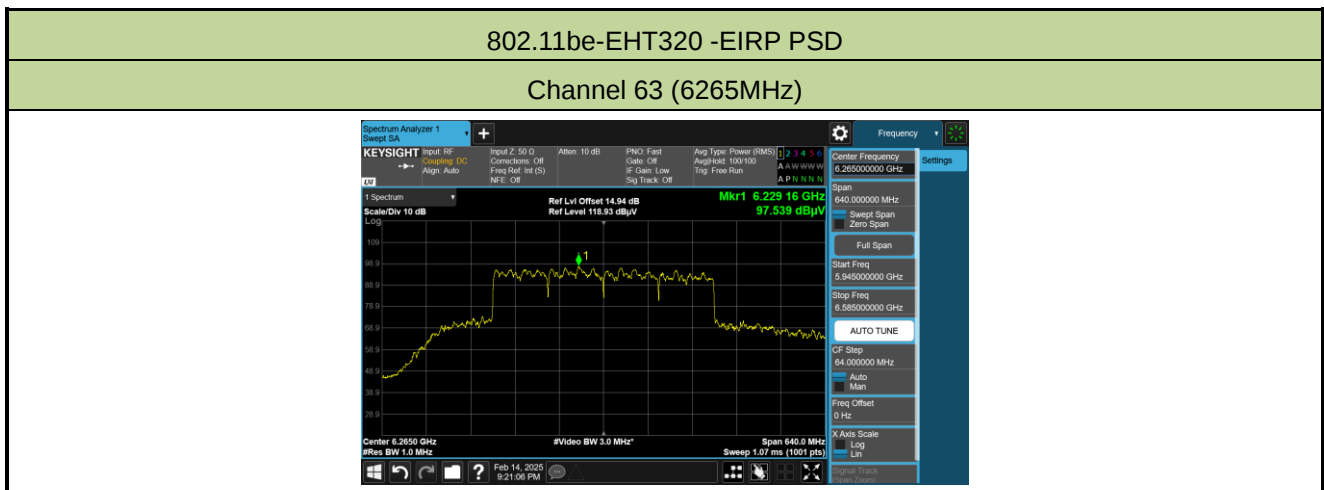

6.5. In-Band Emission Measurement

6.5.1. Test Limit

Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)

Suppressed by 28 dB at one channel bandwidth from the channel center.

Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.

6.5.2. Test Procedure used

KDB 789033D02v02r01- Section II)A)1

KDB 987594 D02v02r01- Section J

6.5.3. Test Setting


Emissions Mask Reference Level Measurement

1. Set the span to encompass the entire 26 dB EBW of the signal.
2. Set RBW = same RBW used for 26 dB EBW measurement.
3. Set VBW $\geq 3 \times$ RBW.
4. Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
5. Sweep time = auto.
6. Detector = RMS.
7. Trace average at least 100 traces in power averaging (rms) mode.
8. Use the peak search function on the instrument to find the peak of the spectrum.

In-Band Emission


1. Using the measuring equipment limit line function, develop the emissions mask based on rule.
2. Adjust the span to encompass the entire mask as necessary.
3. Clear trace.
4. Trace average at least 100 traces in power averaging (rms) mode.
5. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

6.5.4. Test Setup

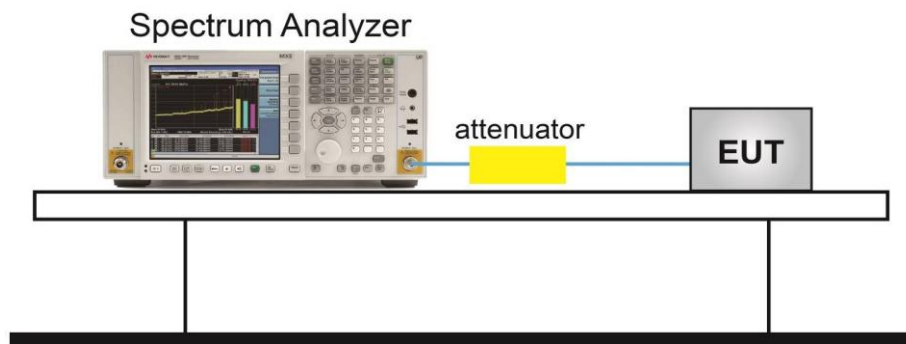


6.5.5. Test Result

Product	ACCESS POINT	Temperature	23°C
Test Engineer	AC2 / Stanley	Relative Humidity	56%
Filter Path	6GFB	Test Date	2025/2/20

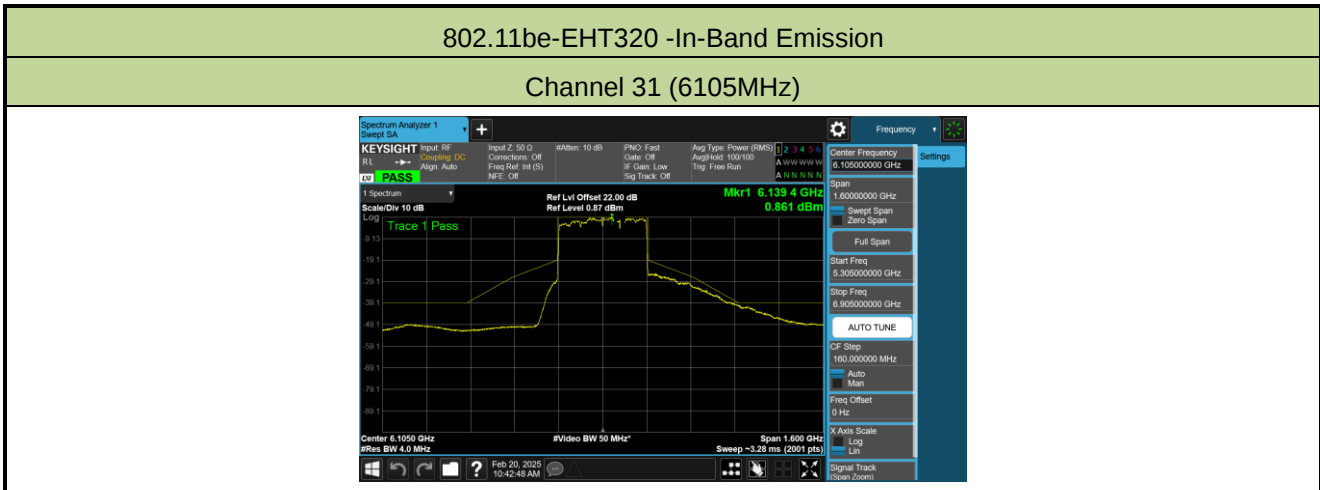

Product	ACCESS POINT	Temperature	23°C
Test Engineer	AC2 / Stanley	Relative Humidity	56%
Filter Path	6GPB	Test Date	2025/2/17

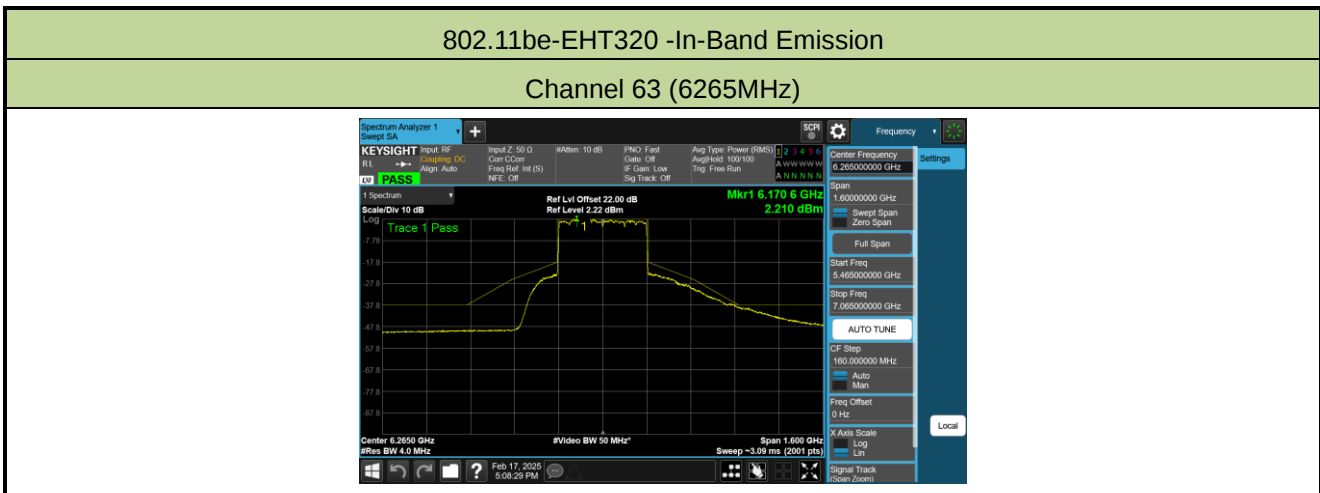

6.6. Frequency Stability Measurement

6.6.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.6.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

6.6.3. Test Setup

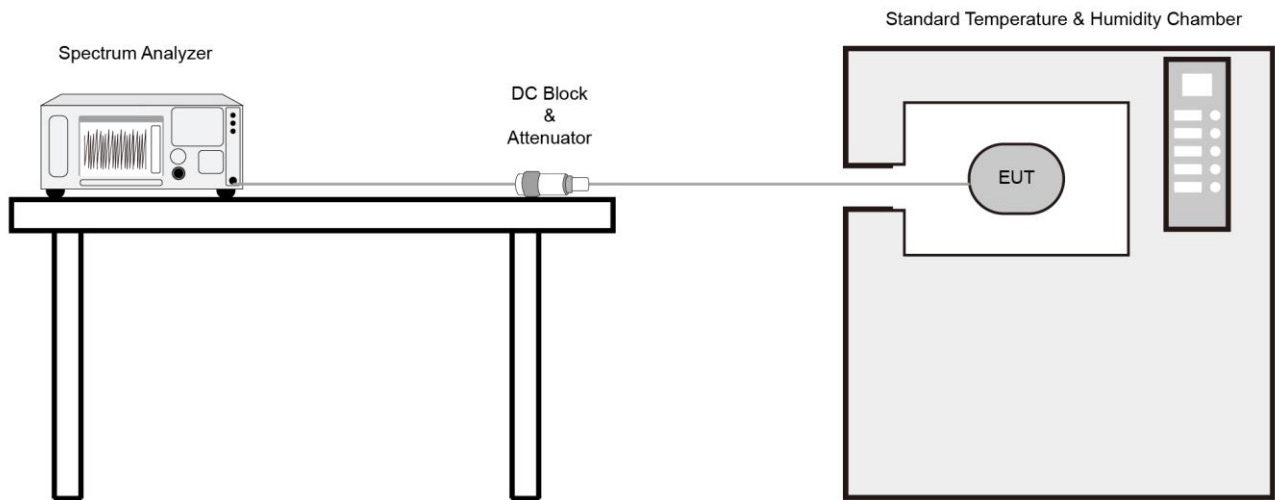

6.6.4. Test Result

Product	ACCESS POINT	Test Engineer	Fran
Test Site	SR3	Test Date	2025/2/26
Test Item	Frequency Stability Measurement_6GFB		

Voltage (%)	Power (AC)	Temp (°C)	Frequency (MHz)	Frequency Tolerance (ppm)			
				0 minutes	2 minutes	5 minutes	10 minutes
100%	120V	+ 20	5955	-11.44	-11.42	-11.47	-11.39

Note 1: Frequency Tolerance (ppm) = {[Measured Frequency (MHz) - Declared Frequency (MHz)] / Declared Frequency (MHz)} *10⁶.

Product	ACCESS POINT	Test Engineer	Fran
Test Site	SR3	Test Date	2025/2/26
Test Item	Frequency Stability Measurement_6GPB		

Voltage (%)	Power (AC)	Temp (°C)	Frequency (MHz)	Frequency Tolerance (ppm)			
				0 minutes	2 minutes	5 minutes	10 minutes
100%	120V	+ 20	6115	-10.97	-11.07	-11.05	-11.04

Note 1: Frequency Tolerance (ppm) = {[Measured Frequency (MHz) - Declared Frequency (MHz)] / Declared Frequency (MHz)} *10⁶.

6.7. Contention Based Protocol

6.7.1. Test Limit

Unlicensed indoor low power device must detect co-channel radio frequency power that is at least -62dBm (The threshold is referenced to a 0dBi antenna gain.) or low.

Indoor low power device must detect an AWGN signal with 90% (or better) level of certainty.

6.7.2. Test Procedure Used

KDB 987594 D02v02r01- Section I


6.7.3. Test Setting

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
Connect the output port of the EUT to the signal analyzer 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate a 10 MHz-wide AWGN signal. Use Table 1 of KDB 987594 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level. Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in below figure.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.

9. Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.

10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

6.7.4. Test Setup

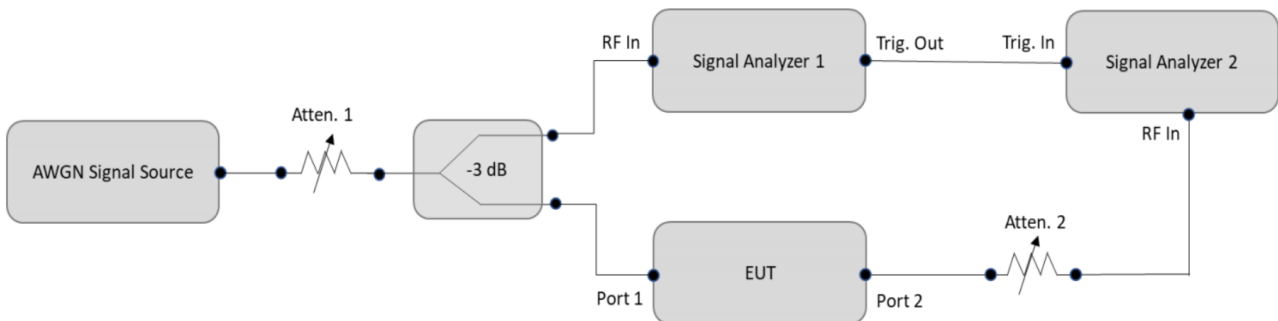

6.7.5. Test Result

Product	ACCESS POINT	Temperature	23°C
Test Engineer	Jay	Relative Humidity	52%
Test Site	SR5	Test Date	2025/1/2

Test Channel	Bandwidth (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	AWGN Power (dBm)	Ant. Gain (dBi)	Adjust Power (dBm)	Detection Limit (dBm)	Detected Number	Detection Probability (%)	Limit (%)	Test Result
Operation Band: U-NII 5											
63	320	6105	5950	-63.00	3.60	-66.60	≤ -62.0	10	100	90	Pass


Note 1: Adjust Power (dBm) = AWGN Power (dBm) – Antenna Gain (dBi).

Note 2: Conducted measurements are used.

Bandwidth (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	Adjust Power (dBm)	EUT Tx Status
Operation Band: U-NII 5				
320	6105	5950	-69.60	ON
			-67.60	Minimal
			-66.60	OFF
Note: OFF: AWGN level at which no transmission is detected, consistently for a minimum period of 10 seconds Minimal: AWGN level at which the system begins to trigger the transmission switch-off, albeit not being kept off consistently ON: AWGN level at which no impact on the transmission is detected, consistently for a minimum period of 10 seconds				


AWGN Signal Level (at Antenna Port) Calibration Plots (NII-5 Band) _Master

802.11 be-HET320 / CH31 (Low Edge)

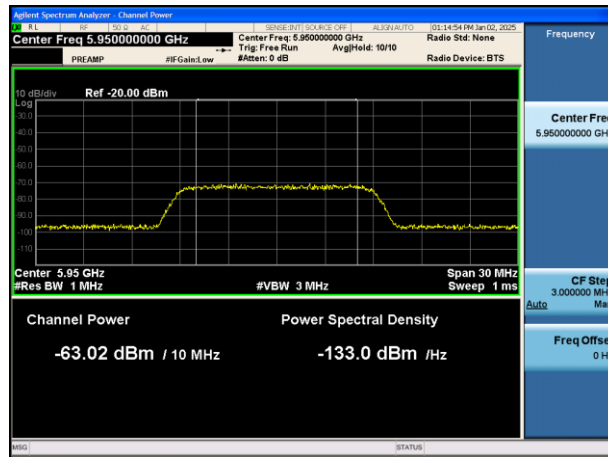

Test Result of EUT ceased transmission (NII-5 Band) _Master

802.11be-HET 320 / CH31 (Low Edge)

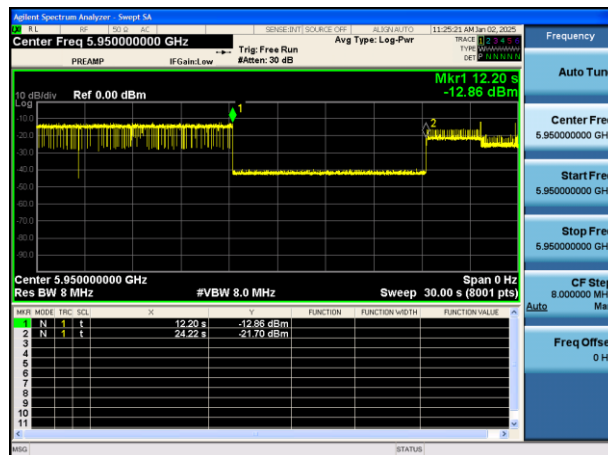

Note – M1: Injection of AWGN Signal, M2: Removal of AWGN Signal

6.8. Radiated Spurious Emission

6.8.1. Test Limit

For 15.407(b)(5) requirement

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6GHz EMC Measurement v02r01 clause G

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.8.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

6.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.8.4. Test Setup

Below 1GHz Test Setup:

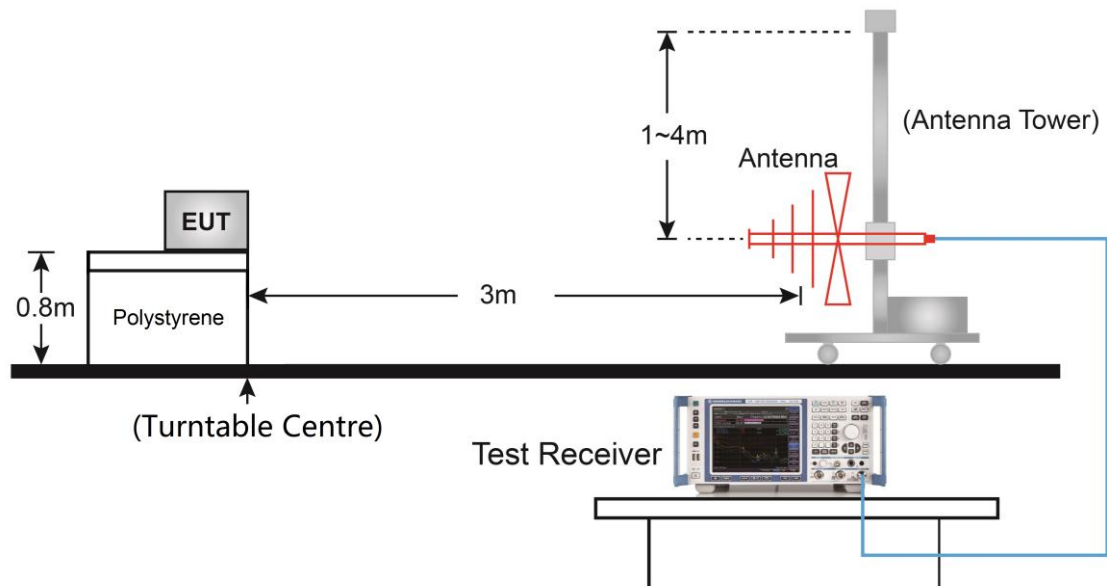


Above 1GHz Test Setup:

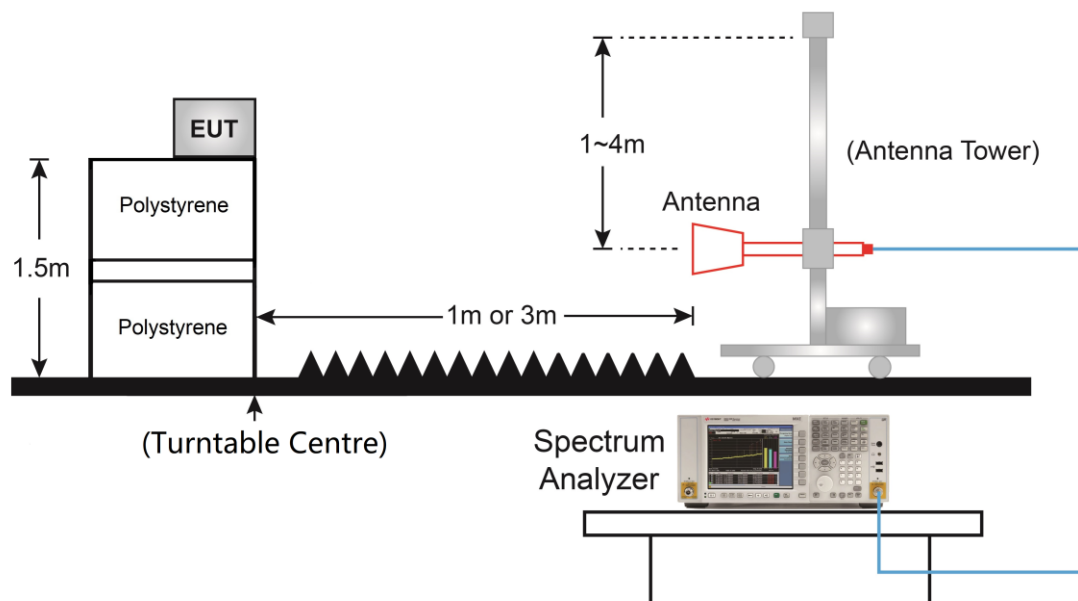

6.8.5. Test Result

EUT	ACCESS POINT	Date of Test	2025-01-15
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-320MHz_TX_Band5_CH 31_ANT 0+1+2+3_6GFB	Test Voltage	AC 120V/60Hz

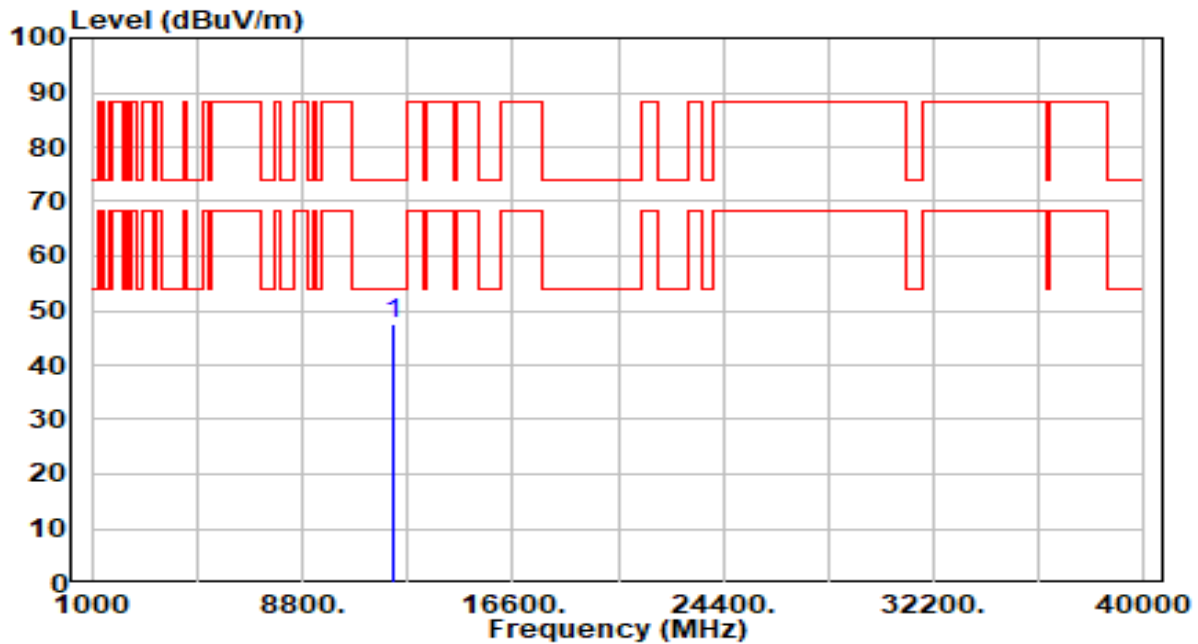


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 12210.000	41.60	5.86	47.46	-26.54	74.00	300	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2025-01-15
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-320MHz_TX_Band5_CH 31_ANT 0+1+2+3_6GFB	Test Voltage	AC 120V/60Hz

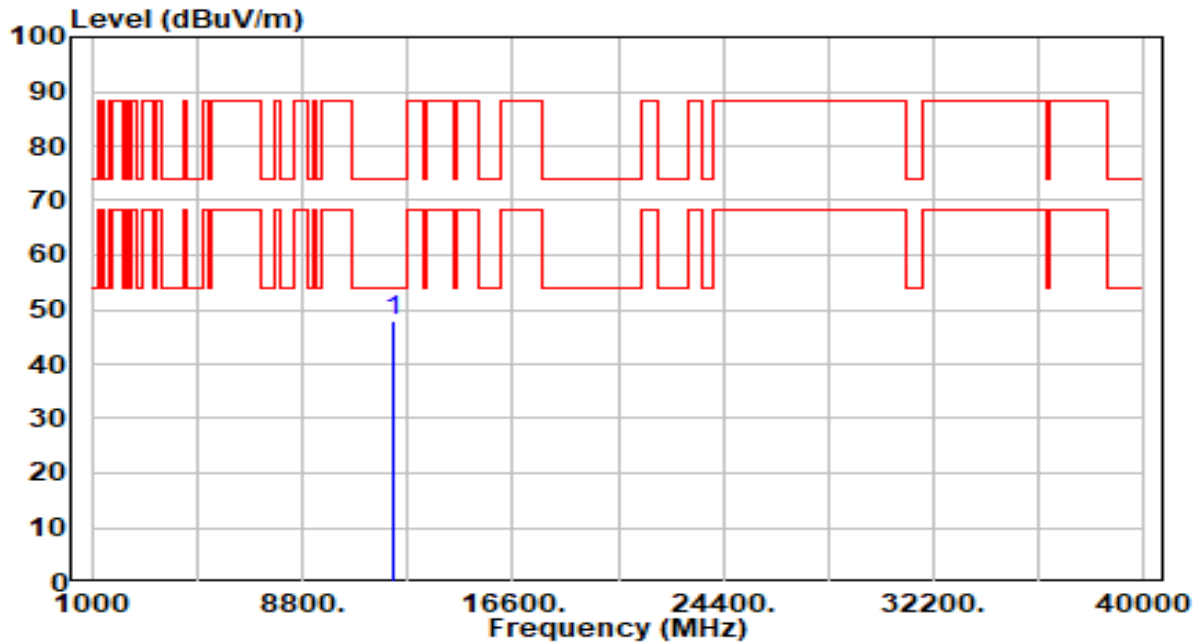


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	12210.000	42.12	5.86	47.98	-26.02	74.00	100	104	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2025-02-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-320MHz_TX_Band5_CH 63_ANT 0+1+2+3_6GPB	Test Voltage	AC 120V/60Hz

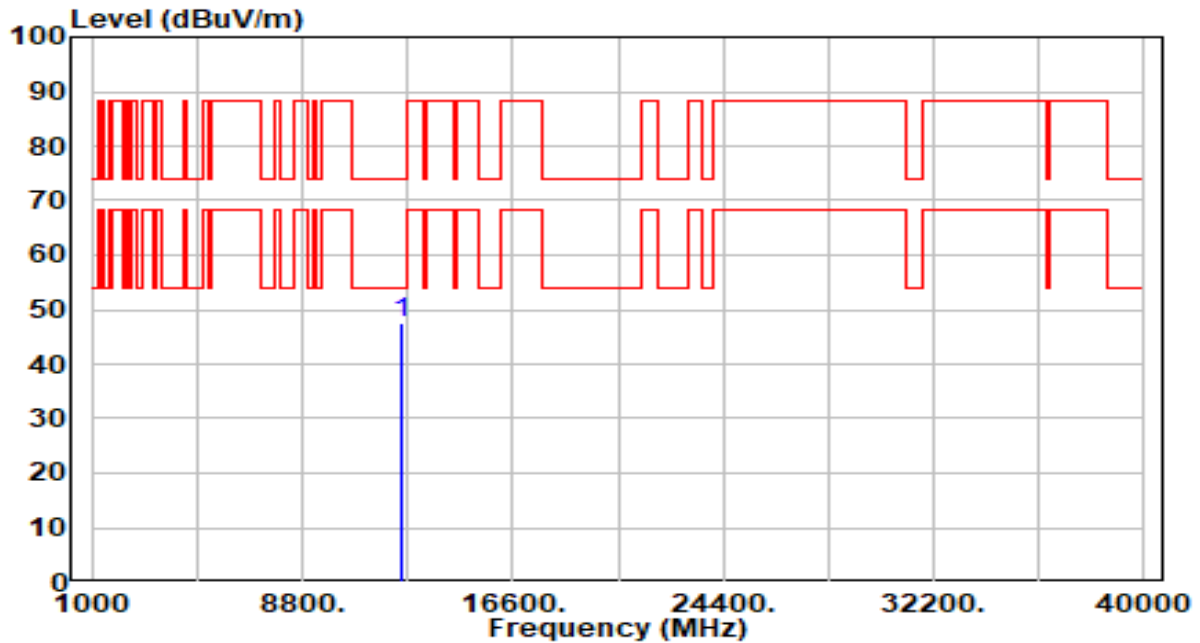


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 12530.000	40.78	6.67	47.45	-26.55	74.00	300	339	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2025-02-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-320MHz_TX_Band5_CH 63_ANT 0+1+2+3_6GPB	Test Voltage	AC 120V/60Hz

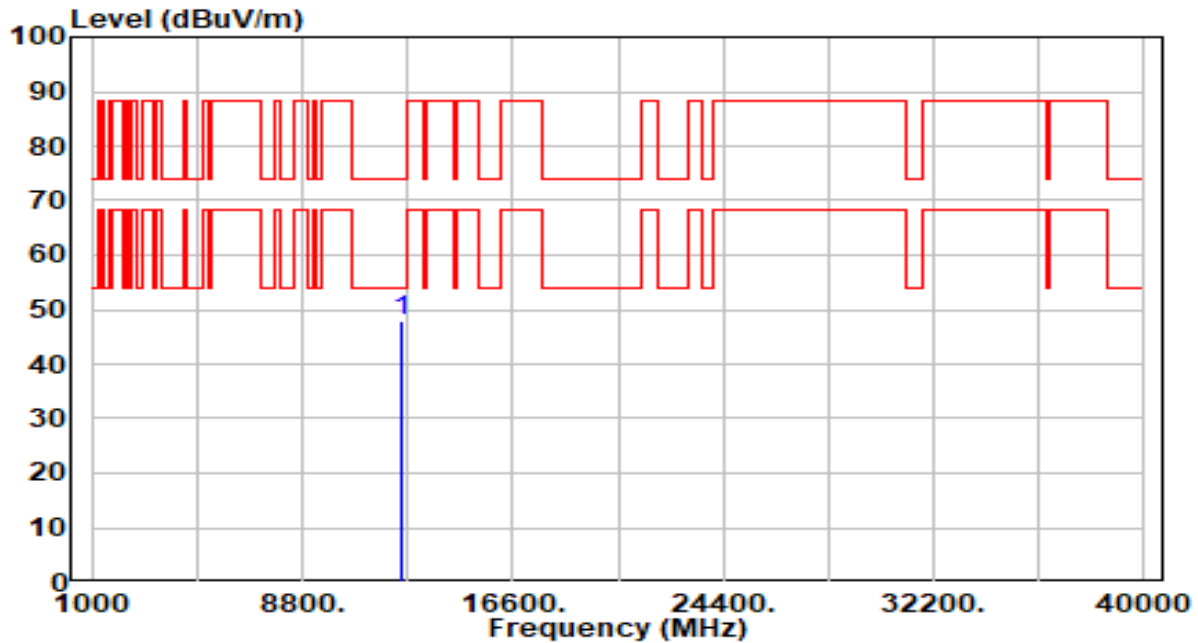

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 12530.000	41.43	6.67	48.09	-25.91	74.00	120	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.9. Radiated Restricted Band Edge

6.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b)(5) requirement

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6GHz EMC Measurement v02r01 clause G - Unwanted Emission Measurement

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.9.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

6.9.3. Test Setting

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
4. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
5. Detector = Peak


6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.9.4. Test Setup

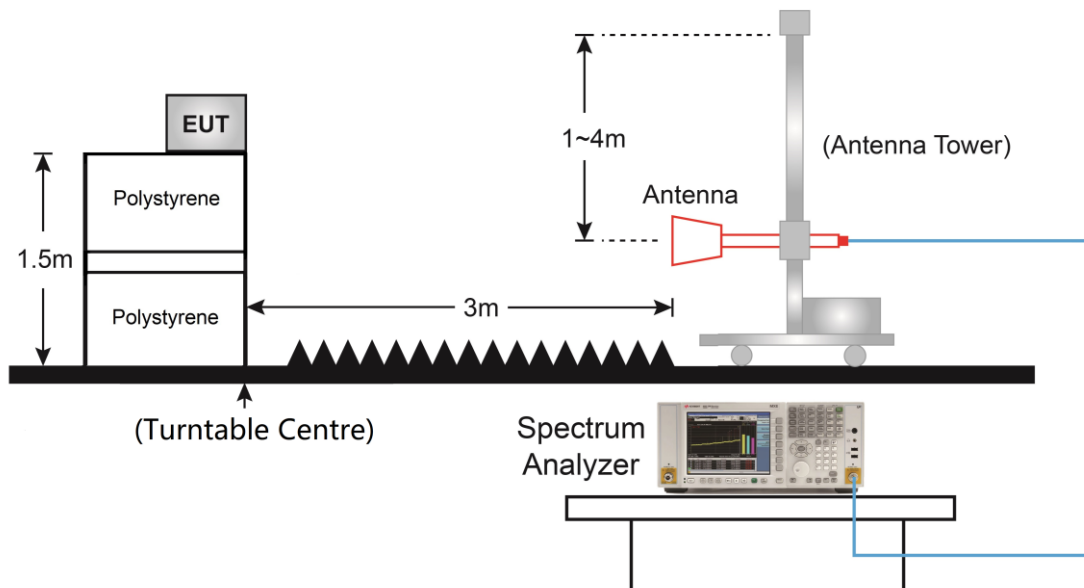

6.9.5. Test Result

EUT	ACCESS POINT	Date of Test	2025-01-15
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-320MHz_TX_Band5_CH 31_ANT 0+1+2+3_6GFB	Test Voltage	AC 120V/60Hz

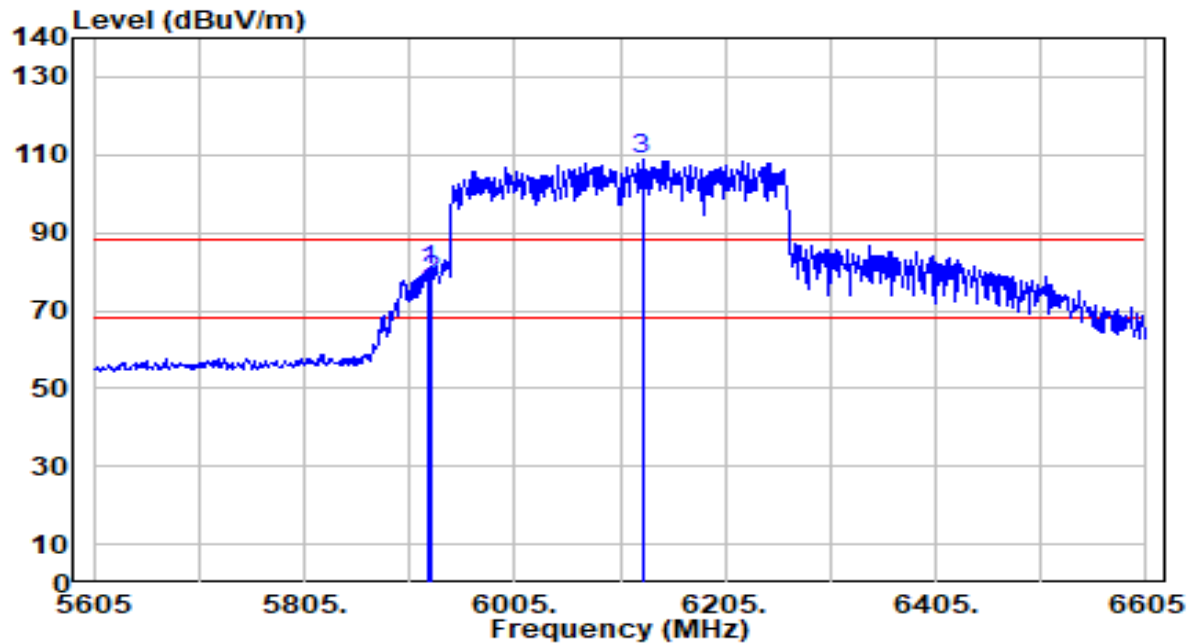


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5922.000	78.08	2.27	80.34	-7.86	88.20	300	152	Peak
2		5925.000	75.26	2.27	77.53	-10.67	88.20	300	152	Peak
3		6126.000	105.82	2.85	108.67	N/A	N/A	300	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2025-01-15
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-320MHz_TX_Band5_CH 31_ANT 0+1+2+3_6GFB	Test Voltage	AC 120V/60Hz

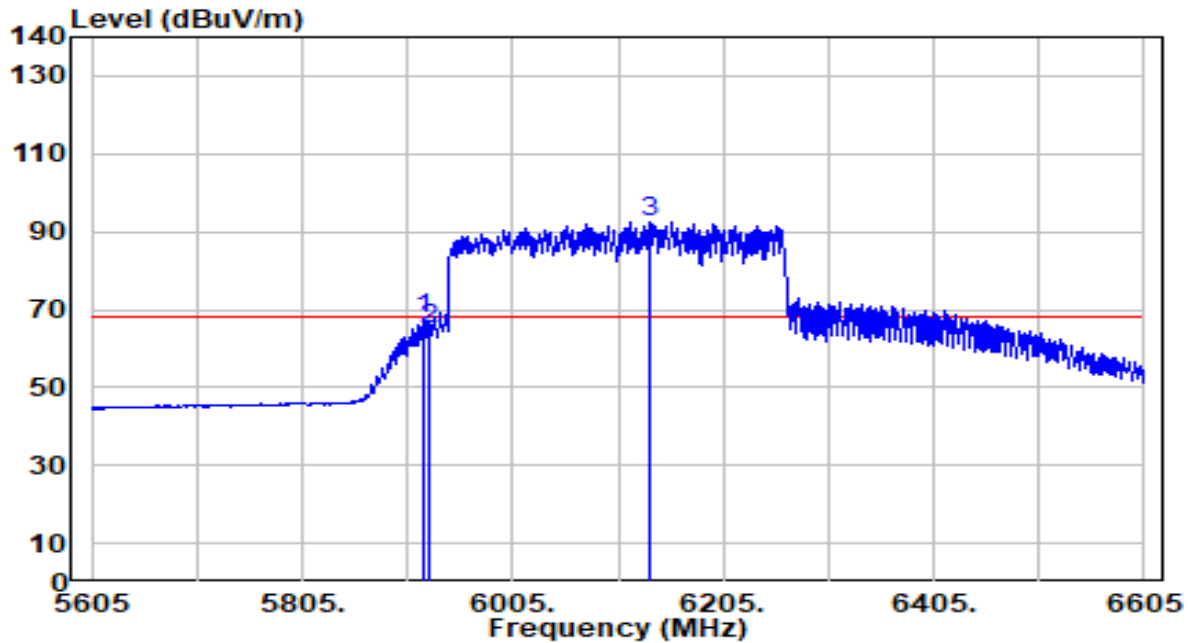


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5921.000	65.11	2.27	67.38	-0.82	68.20	300	152	Average
2		5925.000	62.95	2.27	65.21	-2.99	68.20	300	152	Average
3		6136.000	89.75	2.90	92.65	N/A	N/A	300	152	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2025-01-15
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-320MHz_TX_Band5_CH 31_ANT 0+1+2+3_6GFB	Test Voltage	AC 120V/60Hz

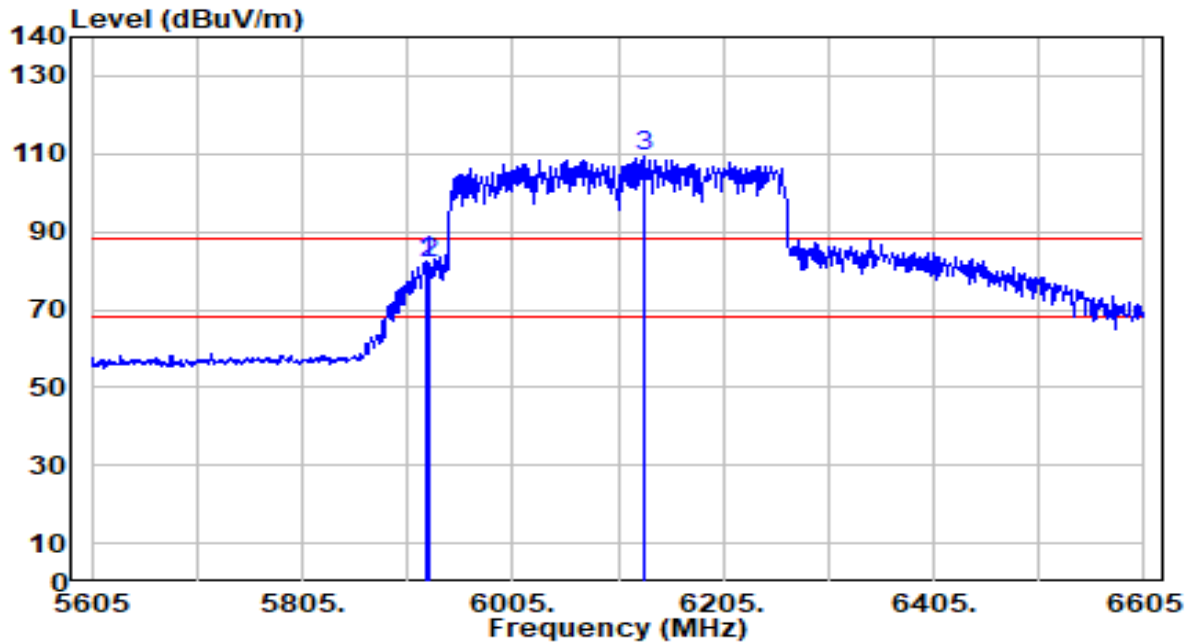


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5924.000	79.97	2.27	82.24	-5.96	88.20	100	152	Peak
2		5925.000	79.44	2.27	81.70	-6.50	88.20	100	152	Peak
3		6130.000	106.56	2.87	109.43	N/A	N/A	100	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2025-01-15
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-320MHz_TX_Band5_CH 31_ANT 0+1+2+3_6GFB	Test Voltage	AC 120V/60Hz

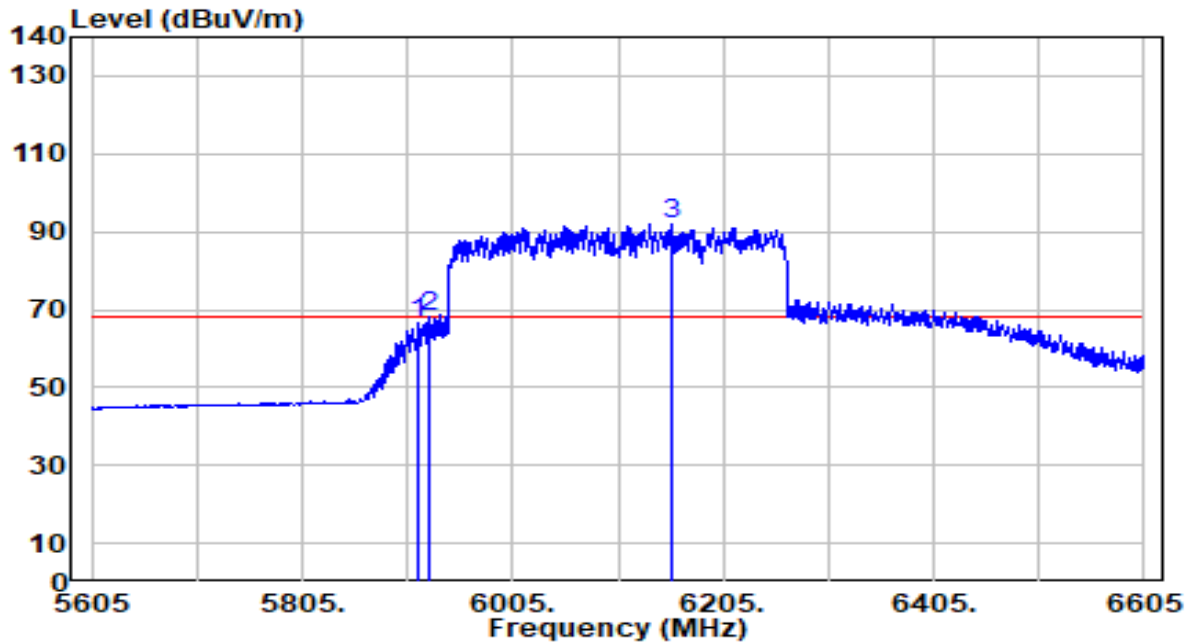


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5915.000	64.29	2.26	66.56	-1.64	68.20	100	152	Average
2	* 5925.000	65.75	2.27	68.02	-0.18	68.20	100	152	Average
3	6156.000	88.97	2.99	91.96	N/A	N/A	100	152	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2025-02-14
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-320MHz_TX_Band5_CH 63_ANT 0+1+2+3_6GPB	Test Voltage	AC 120V/50Hz

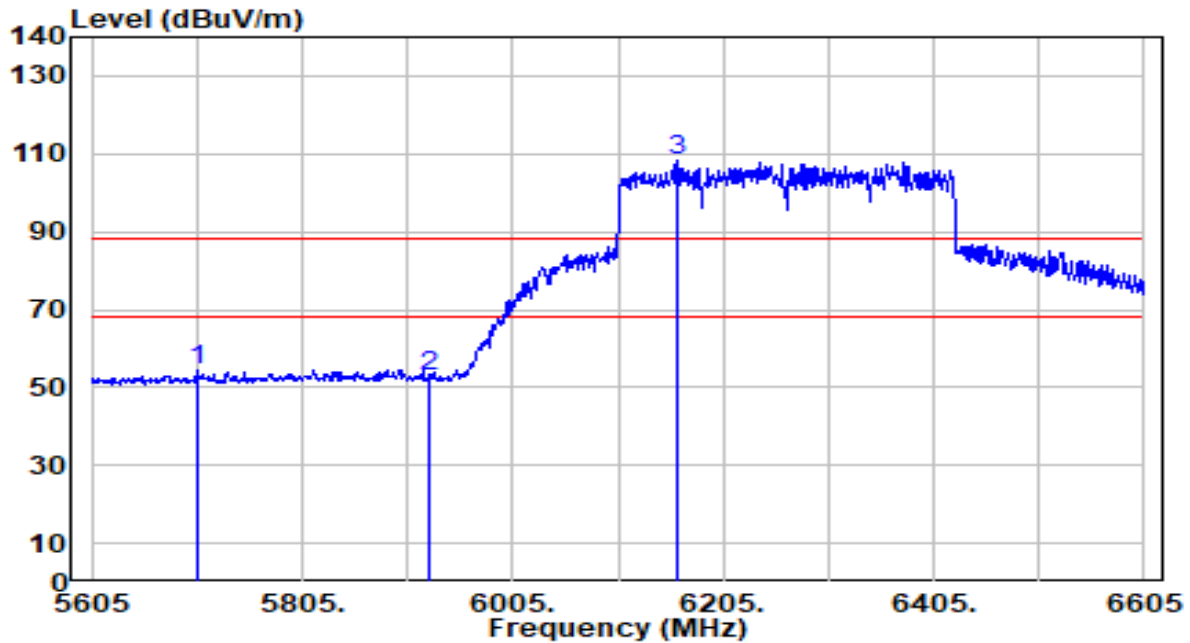


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5706.000	52.75	1.80	54.55	-33.65	88.20	100	228	Peak
2		5925.000	50.38	2.27	52.65	-35.55	88.20	100	228	Peak
3		6161.000	105.27	3.01	108.28	N/A	N/A	100	228	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2025-02-14
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-320MHz_TX_Band5_CH 63_ANT 0+1+2+3_6GPB	Test Voltage	AC 120V/50Hz

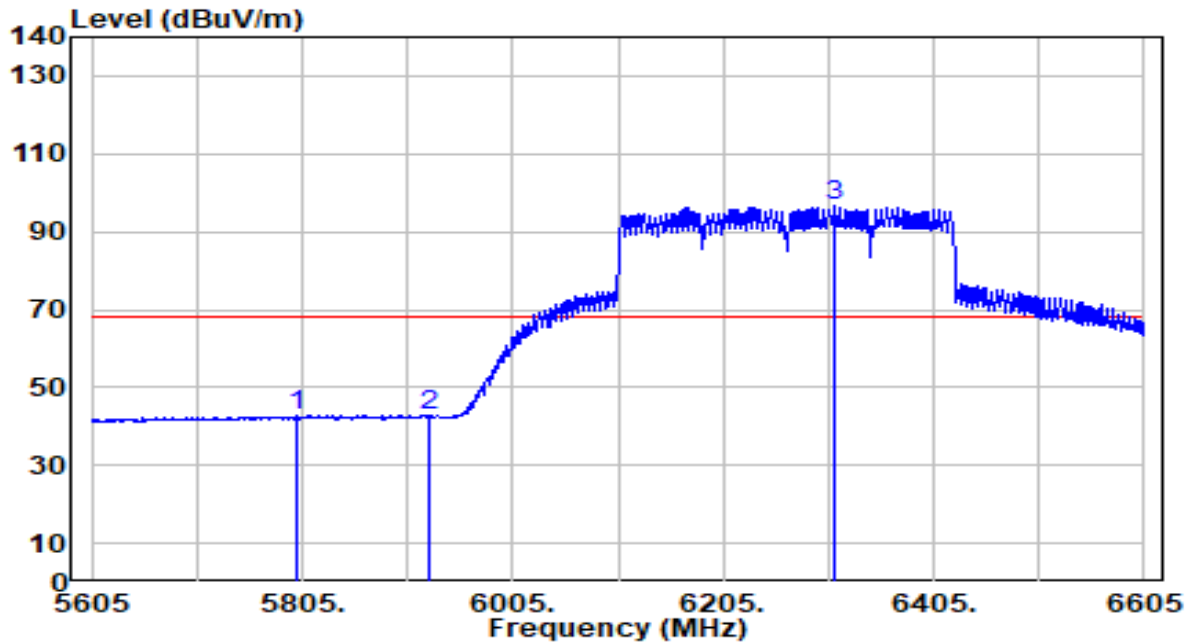


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5799.000	40.79	2.24	43.03	-25.17	68.20	100	228	Average
2		5925.000	40.39	2.27	42.66	-25.54	68.20	100	228	Average
3		6310.000	92.38	4.12	96.50	N/A	N/A	100	228	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2025-02-14
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-320MHz_TX_Band5_CH 63_ANT 0+1+2+3_6GPB	Test Voltage	AC 120V/50Hz

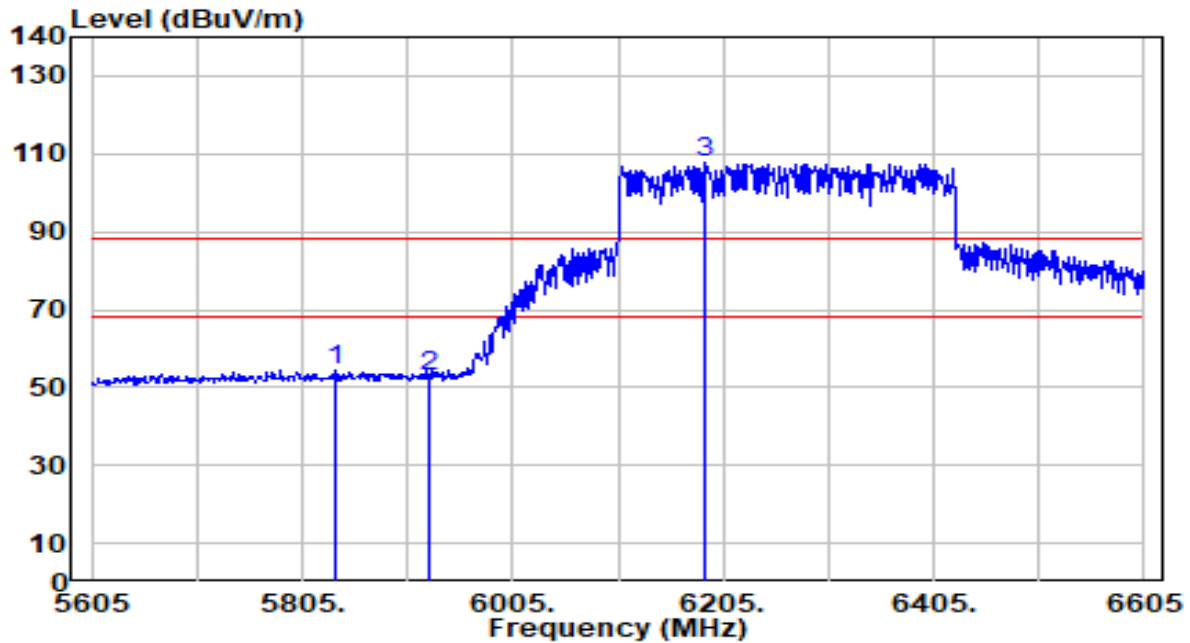


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5837.000	52.08	2.25	54.33	-33.87	88.20	100	222	Peak
2		5925.000	50.66	2.27	52.93	-35.27	88.20	100	222	Peak
3		6188.000	104.55	3.13	107.68	N/A	N/A	100	222	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2025-02-14
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-320MHz_TX_Band5_CH 63_ANT 0+1+2+3_6GPB	Test Voltage	AC 120V/50Hz

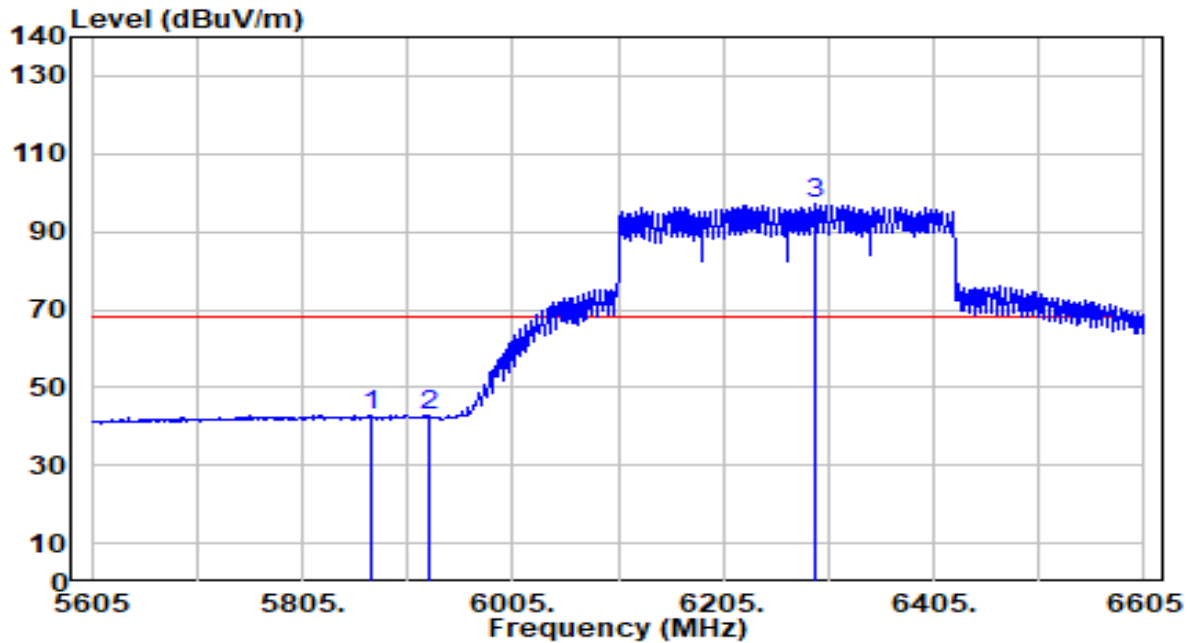

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5870.000	40.71	2.26	42.96	-25.24	68.20	100	222	Average
2		5925.000	40.27	2.27	42.54	-25.66	68.20	100	222	Average
3		6293.000	93.17	3.98	97.15	N/A	N/A	100	222	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.10. AC Conducted Emissions


6.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.10.2. Test Setup

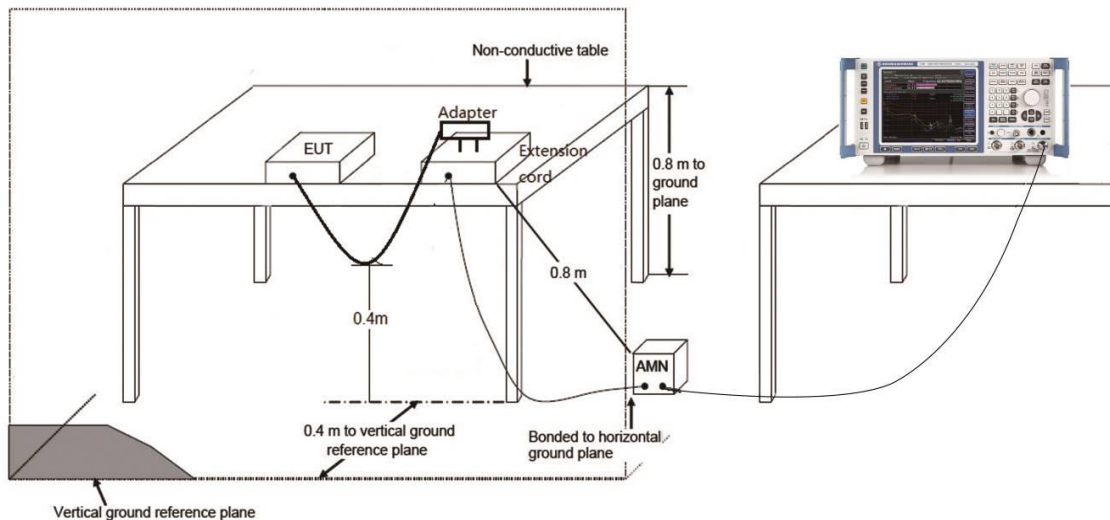

6.10.3. Test Result

EUT	ACCESS POINT	Date of Test	2025-02-26
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	22.2°C /56%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11ax-20MHz_TX_Band1_CH 40_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

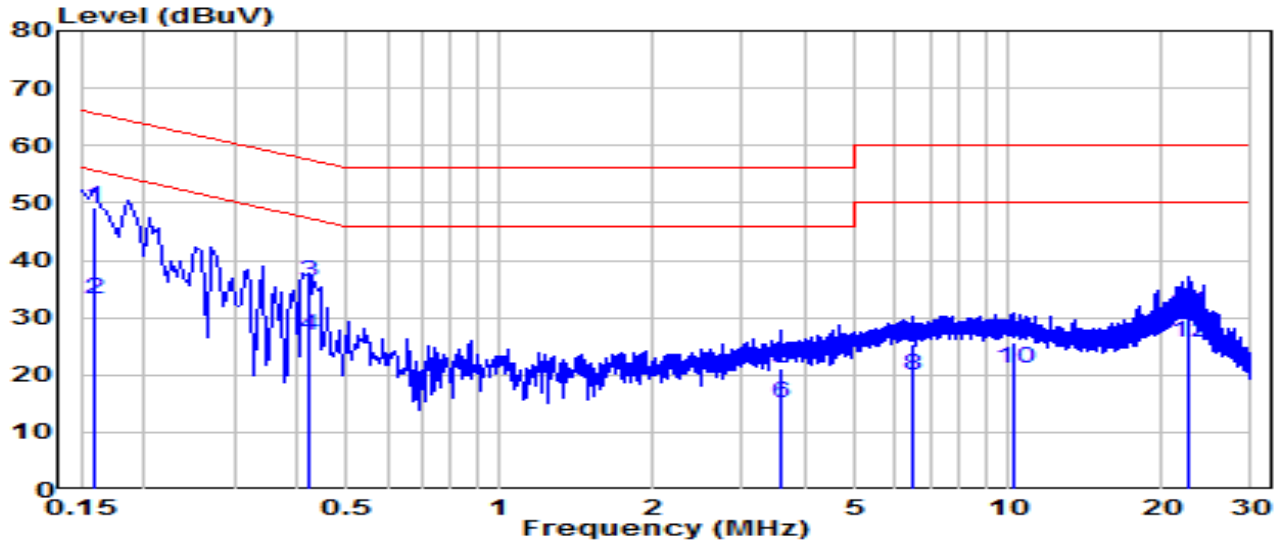


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.159	39.71	9.63	49.34	-16.18	65.52	QP
2	*	0.159	23.63	9.63	33.26	-22.25	55.52	Average
3		0.420	26.63	9.65	36.28	-21.17	57.45	QP
4		0.420	17.23	9.65	26.88	-20.57	47.45	Average
5		3.579	11.37	9.72	21.09	-34.91	56.00	QP
6		3.579	5.26	9.72	14.98	-31.02	46.00	Average
7		6.449	15.56	9.78	25.35	-34.65	60.00	QP
8		6.449	10.25	9.78	20.03	-29.97	50.00	Average
9		10.202	15.75	9.87	25.62	-34.38	60.00	QP
10		10.202	11.30	9.87	21.17	-28.83	50.00	Average
11		22.621	20.84	9.93	30.77	-29.23	60.00	QP
12		22.621	15.64	9.93	25.57	-24.43	50.00	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2025-02-26
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	22.2°C /56%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11ax-20MHz_TX_Band1_CH 40_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

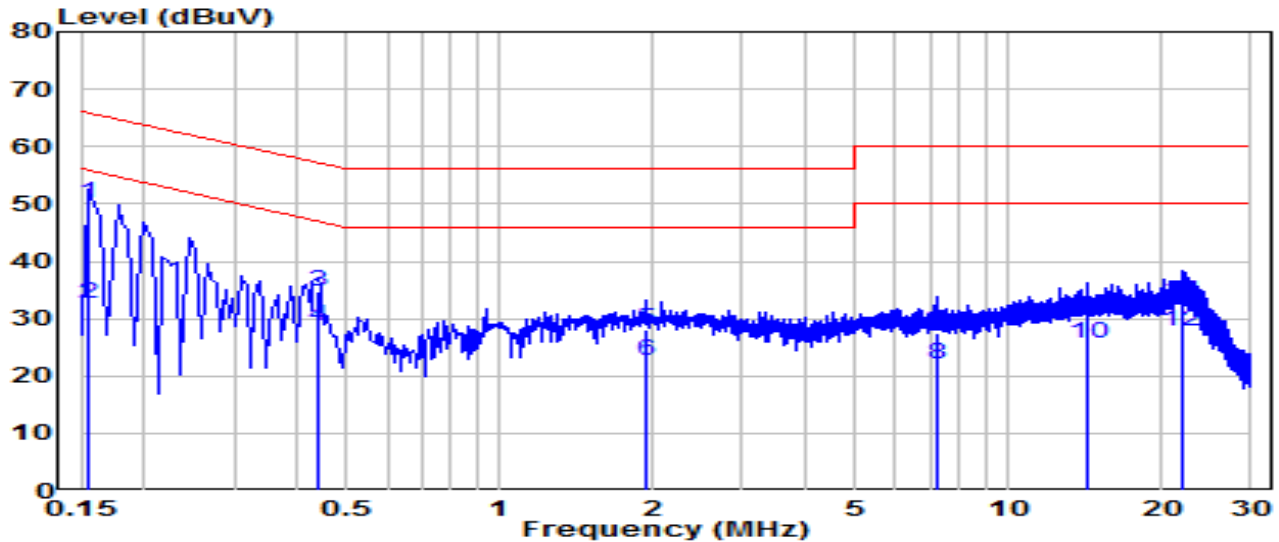

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.154	40.47	9.63	50.10	-15.65	65.75	QP
2	*	0.154	22.89	9.63	32.52	-23.24	55.75	Average
3		0.438	25.02	9.65	34.67	-22.43	57.10	QP
4		0.438	19.05	9.65	28.70	-18.40	47.10	Average
5		1.950	18.34	9.71	28.04	-27.96	56.00	QP
6		1.950	12.81	9.71	22.52	-23.48	46.00	Average
7		7.214	17.52	9.82	27.34	-32.66	60.00	QP
8		7.214	12.29	9.82	22.10	-27.90	50.00	Average
9		14.274	20.00	9.93	29.93	-30.07	60.00	QP
10		14.274	15.62	9.93	25.55	-24.45	50.00	Average
11		21.860	22.88	10.01	32.88	-27.12	60.00	QP
12		21.860	17.85	10.01	27.86	-22.14	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

7. Conclusion

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC rules.

Appendix A : Test Setup Photograph

Refer to “2412TW0107-UT” file.

Appendix B : External Photograph

Refer to “2412TW0107-UE” file.

Appendix C : Internal Photograph

Refer to “2412TW0107-UI” file.

_____ The End _____