

Company: Hewlett Packard Enterprise

Test of: APINH303

To: FCC CFR 47 Part 15 Subpart E 15.407

Report No.: HWPDP85-U8_Conducted Rev A

TEST REPORT ADDENDUM - CONDUCTED



Issue Date: 1st December 2016

Master Document Number	Addendum Reports
HWPDP85-U8_Master	HWPDP85-U8_Conducted
	HWPDP85-U8_Radiated
	HWPDP85-G4 (FCC Part 15B & ICES-003)



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 2 of 122

Table of Contents

1. MEASUREMENT AND PRESENTATION OF TEST DATA	3
2. TEST SUMMARY	4
3. TEST RESULTS	5
3.1. Peak Transmit Power	5
3.2. 26 dB & 99% Bandwidth	11
3.3. 6 dB & 99% Bandwidth	16
3.4. Power Spectral Density	21
A. APPENDIX - GRAPHICAL IMAGES	31
A.1. 26 dB & 99% Bandwidth	32
A.2. 6 dB & 99% Bandwidth	50
A.3. Power Spectral Density	68

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

1. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 4 of 122

2. TEST SUMMARY

List of Measurements

Test Header	Result	Data Link
(a) Peak Transmit Power	Complies	View Data
(a) 26 dB & 99% Bandwidth	Complies	View Data
(a)(5) Power Spectral Density	Complies	View Data

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



3. TEST RESULTS

3.1. Peak Transmit Power

Conducted Test Conditions for Maximum Conducted Output Power			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Maximum Conducted Output Power	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Maximum Conducted Output Power Measurement

Method PM (Measurement using an RF average power meter). KDB 789033 defines a methodology using an average wideband power meter. Measurements were made while the EUT was operating in a continuous transmission mode (100% duty cycle) at the appropriate center frequency. All operational modes and frequency bands were measured independently and the resultant calculated. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported separately. A summation (Σ) of each antenna port output power is provided which includes any offset due to Duty Cycle Correction Factor (DCCF). Testing was performed under ambient conditions at nominal voltage.

Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.

Supporting Information

Calculated Power = $A + G + Y + 10 \log (1/x)$ dBm

$A = \text{Total Power } [10 \cdot \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})]$

$G = \text{Antenna Gain}$

$Y = \text{Beamforming Gain}$

$x = \text{Duty Cycle (average power measurements only)}$

Limits Maximum Conducted Output Power

Operating Frequency Band 5150-5250 MHz

15.407 (a)(1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 6 of 122

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Operating Frequency Band 5250-5350 and 5470 – 5725 MHz

15. 407 (a)(2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Operating Frequency Band 5725 – 5850 MHz

15. 407 (a)(3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 7 of 122

Equipment Configuration for Peak Transmit Power

Variant:	802.11a	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5180.0	13.52	14.73	--	--	17.18	--	30.00	-12.82	
5200.0	13.61	14.66	--	--	17.18	--	30.00	-12.82	
5240.0	13.73	14.62	--	--	17.21	--	30.00	-12.79	

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

Equipment Configuration for Peak Transmit Power

Variant:	802.11ac-80	Duty Cycle (%):	99.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5210.0	9.52	10.65	--	--	13.13	--	30.00	-16.87	

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 8 of 122

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-20	Duty Cycle (%):	99.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5180.0	13.16	14.19	--	--	16.72	--	30.00	-13.28	
5200.0	13.21	14.14	--	--	16.71	--	30.00	-13.29	
5240.0	13.33	14.17	--	--	16.78	--	30.00	-13.22	

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-40	Duty Cycle (%):	99.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5190.0	10.97	12.01	--	--	14.53	--	30.00	-15.47	
5230.0	12.52	13.54	--	--	16.07	--	30.00	-13.93	

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 9 of 122

Equipment Configuration for Peak Transmit Power

Variant:	802.11a	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5745.0	17.82	18.82	--	--	21.36	--	30.00	-8.64	
5785.0	17.59	18.57	--	--	21.12	--	30.00	-8.88	
5825.0	17.76	18.76	--	--	21.30	--	30.00	-8.70	

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

Equipment Configuration for Peak Transmit Power

Variant:	802.11ac-80	Duty Cycle (%):	99.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5775.0	17.48	18.37	--	--	20.96	--	30.00	-9.04	

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 10 of 122

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-20	Duty Cycle (%):	99.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5745.0	17.84	18.84	--	--	21.38	--	30.00	-8.62	
5785.0	17.66	18.60	--	--	21.17	--	30.00	-8.83	
5825.0	17.84	18.78	--	--	21.35	--	30.00	-8.65	

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-40	Duty Cycle (%):	99.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5755.0	17.57	18.54	--	--	21.09	--	30.00	-8.91	
5795.0	17.35	18.29	--	--	20.86	--	30.00	-9.14	

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 11 of 122

3.2. 26 dB & 99% Bandwidth

Conducted Test Conditions for 26 dB and 99% Bandwidth			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	26 dB and 99 % Bandwidth	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		
Test Procedure for 26 dB and 99% Bandwidth Measurement The bandwidth at 26 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency. The Resolution Bandwidth was set to approximately 1% of the emission bandwidth. Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported. Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 12 of 122

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11a	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5180.0	24.449	20.842	--	--	24.449	20.842		
5200.0	23.166	22.124	--	--	23.166	22.124		
5240.0	21.323	22.285	--	--	22.285	21.323		
Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5180.0	16.513	16.513	--	--	16.513	16.513		
5200.0	16.513	16.513	--	--	16.513	16.513		
5240.0	16.513	16.513	--	--	16.513	16.513		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 13 of 122

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11ac-80	Duty Cycle (%):	99.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5210.0	83.687	83.367	--	--	83.687	83.367		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5210.0	76.313	76.313	--	--	76.313	76.313		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 14 of 122

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11n HT-20	Duty Cycle (%):	99.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Results Summary Report

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5180.0	22.846	20.361	--	--	22.846	20.361		
5200.0	20.922	20.681	--	--	20.922	20.681		
5240.0	21.242	21.483	--	--	21.483	21.242		
Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5180.0	17.635	17.635	--	--	17.635	17.635		
5200.0	17.635	17.635	--	--	17.635	17.635		
5240.0	17.635	17.635	--	--	17.635	17.635		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 15 of 122

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11n HT-40	Duty Cycle (%):	99.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5190.0	39.760	39.760	--	--	39.760	39.760		
5230.0	39.920	40.561	--	--	40.561	39.920		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5190.0	36.072	36.072	--	--	36.072	36.072		
5230.0	36.072	36.072	--	--	36.072	36.072		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 16 of 122

3.3. 6 dB & 99% Bandwidth

Conducted Test Conditions for 6 dB and 99% Bandwidth			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	6 dB and 99 % Bandwidth	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		
Test Procedure for 6 dB and 99% Bandwidth Measurement The bandwidth at 6 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency. The Resolution Bandwidth was set to 100 kHz. Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported. Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 17 of 122

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	802.11a	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Results Summary Report

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5745.0	16.353	16.032	--	--	16.353	16.032		
5785.0	16.353	16.353	--	--	16.353	16.353		
5825.0	16.353	16.032	--	--	16.353	16.032		
Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5745.0	24.930	25.731	--	--	25.731	24.930		
5785.0	24.850	25.170	--	--	25.170	24.850		
5825.0	26.132	26.934	--	--	26.934	26.132		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 18 of 122

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	802.11ac-80	Duty Cycle (%):	99.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5775.0	75.351	75.351	--	--	75.351	75.351		
Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5775.0	108.377	109.980	--	--	109.980	108.377		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 19 of 122

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	802.11n HT-20	Duty Cycle (%):	99.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5745.0	17.074	17.074	--	--	17.074	17.074		
5785.0	17.475	17.154	--	--	17.475	17.154		
5825.0	17.555	16.754	--	--	17.555	16.754		
Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5745.0	26.132	26.132	--	--	26.132	26.132		
5785.0	25.571	26.132	--	--	26.132	25.571		
5825.0	27.655	27.816	--	--	27.816	27.655		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 20 of 122

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	802.11n HT-40	Duty Cycle (%):	99.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5755.0	35.110	35.110	--	--	35.110	35.110		
5795.0	35.110	35.110	--	--	35.110	35.110		
Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5755.0	49.058	50.661	--	--	50.661	49.058		
5795.0	49.699	50.020	--	--	50.020	49.699		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



3.4. Power Spectral Density

Conducted Test Conditions for Power Spectral Density			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Power Spectral Density	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Power Spectral Density

The in-band power spectral density was measured using the test technique specified in KDB 789033. A 1 MHz measurement bandwidth was implemented for the analyzer sweep. Once the sweep is complete the analyzer trace data is downloaded and used for post processing purposes.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. The Peak Power Spectral Density is the highest level found across the emission bandwidth. With multiple antenna port measurements the numerical analyzer data from each port is summed ($\hat{a}$) and a link to this additional graphic is provided.

Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.

Measure and sum the spectra across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with multiple transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were post processed and the resulting numerical and graphical data presented.

NOTE: It may be observed that spectrum in some plots break the limit line however this in itself does NOT constitute a failure. In all cases a spectrum summation plot is provided in order to prove compliance. A failure occurs only after the summation of all spectrum plots have been summed and are found to be greater than the limit line.

Supporting Information

Calculated Power = $A + 10 \log (1/x)$ dBm

$A = \text{Total Power Spectral Density } [10 \cdot \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})]$

$x = \text{Duty Cycle}$

Limits Power Spectral Density

Operating Frequency Band 5150-5250 MHz

15.407 (a)(1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 22 of 122

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Operating Frequency Band 5250-5350 and 5470 – 5725 MHz

15. 407 (a)(2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Operating Frequency Band 5725 – 5850 MHz

15. 407 (a)(3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 23 of 122

Equipment Configuration for Power Spectral Density

Variant:	802.11a	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5180.0	2.905	2.402	--	--	5.184	17.0	-11.8
5200.0	3.237	2.723	--	--	5.334	17.0	-11.7
5240.0	3.203	2.508	--	--	5.367	17.0	-11.6

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 24 of 122

Equipment Configuration for Power Spectral Density
--

Variant:	802.11ac-80	Duty Cycle (%):	99.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5210.0	-7.414	-8.428	--	--	-5.141	15.4	-20.6

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 25 of 122

Equipment Configuration for Power Spectral Density

Variant:	802.11n HT-20	Duty Cycle (%):	99.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5180.0	2.664	2.061	--	--	5.240	15.4	-10.2
5200.0	2.490	1.832	--	--	5.125	15.4	-10.3
5240.0	2.489	1.863	--	--	5.192	15.4	-10.2

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 26 of 122

Equipment Configuration for Power Spectral Density

Variant:	802.11n HT-40	Duty Cycle (%):	99.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5190.0	-2.600	-2.988	--	--	0.238	15.4	-15.2
5230.0	-0.980	-1.761	--	--	1.314	15.4	-14.1

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 27 of 122

Equipment Configuration for Power Spectral Density

Variant:	802.11a	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/500 KHz)						
MHz	a	b	c	d	dBm/500 KHz	dBm/500 KHz	dB
5745.0	5.285	3.337	--	--	7.144	30.0	-22.9
5785.0	4.895	2.950	--	--	7.085	30.0	-22.9
5825.0	4.805	2.507	--	--	6.477	30.0	-23.5

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 28 of 122

Equipment Configuration for Power Spectral Density
--

Variant:	802.11ac-80	Duty Cycle (%):	99.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results							
--------------------------	--	--	--	--	--	--	--

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/500 KHz)						
MHz	a	b	c	d	dBm/500 KHz	dBm/500 KHz	dB
5775.0	-1.794	-4.238	--	--	0.059	28.4	-28.4

Traceability to Industry Recognized Test Methodologies	
--	--

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 29 of 122

Equipment Configuration for Power Spectral Density

Variant:	802.11n HT-20	Duty Cycle (%):	99.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/500 KHz)						
MHz	a	b	c	d	dBm/500 KHz	dBm/500 KHz	dB
5745.0	4.989	3.297	--	--	7.257	28.4	-21.2
5785.0	4.723	2.901	--	--	6.811	28.4	-21.6
5825.0	5.083	2.961	--	--	7.087	28.4	-21.3

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 30 of 122

Equipment Configuration for Power Spectral Density

Variant:	802.11n HT-40	Duty Cycle (%):	99.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	4.60
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/500 KHz)						
MHz	a	b	c	d	dBm/500 KHz	dBm/500 KHz	dB
5755.0	1.426	0.535	--	--	3.859	28.4	-24.6
5795.0	1.918	0.101	--	--	3.820	28.4	-24.6

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 31 of 122

A. APPENDIX - GRAPHICAL IMAGES


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

A.1. 26 dB & 99% Bandwidth

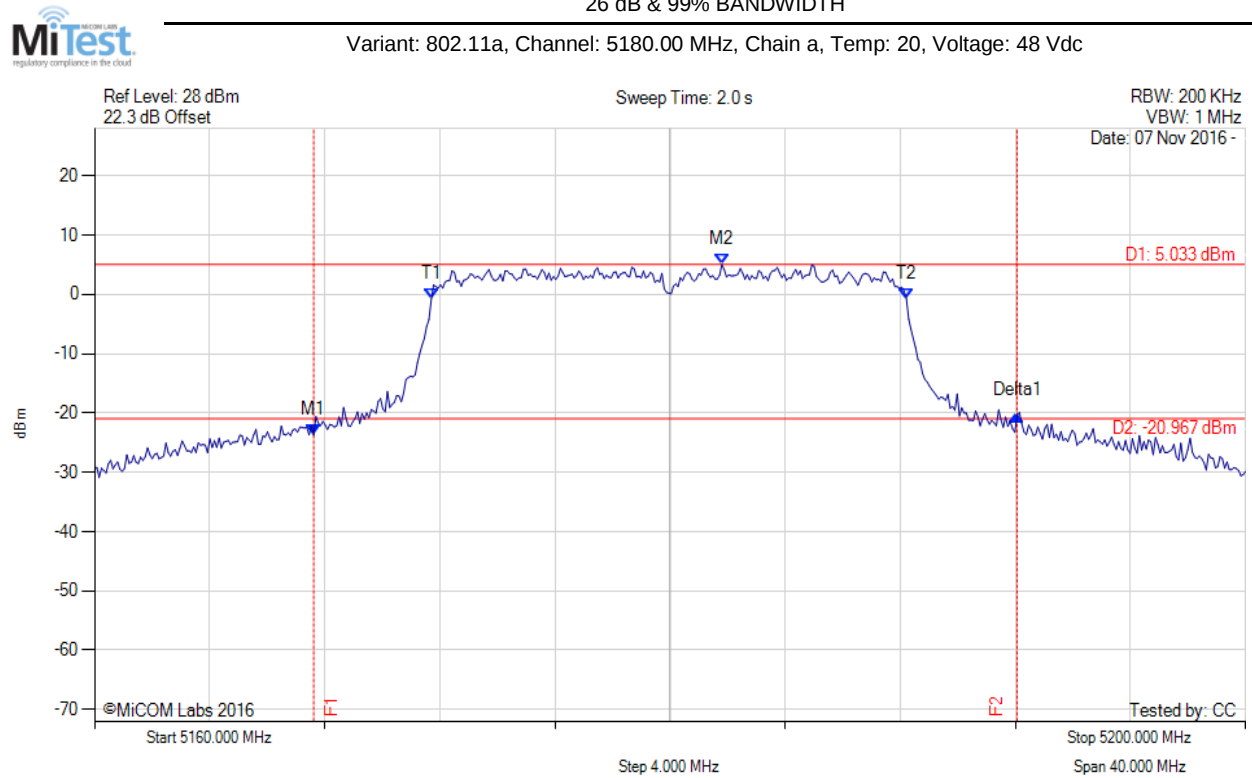

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5167.615 MHz : -23.728 dBm M2 : 5181.804 MHz : 5.033 dBm Delta1 : 24.449 MHz : 3.423 dB T1 : 5171.703 MHz : -0.806 dBm T2 : 5188.216 MHz : -0.796 dBm OBW : 16.513 MHz	Measured 26 dB Bandwidth: 24.449 MHz Measured 99% Bandwidth: 16.513 MHz

[back to matrix](#)

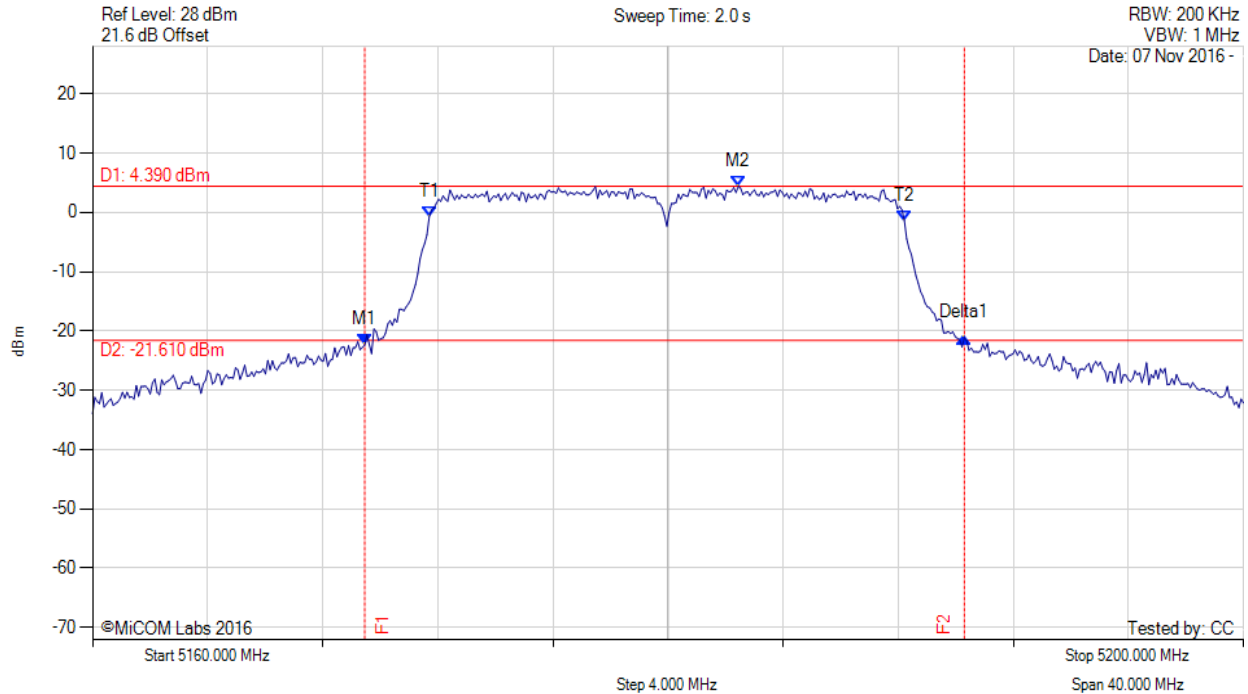

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5169.459 MHz : -22.364 dBm M2 : 5182.445 MHz : 4.390 dBm Delta1 : 20.842 MHz : 1.237 dB T1 : 5171.703 MHz : -0.674 dBm T2 : 5188.216 MHz : -1.483 dBm OBW : 16.513 MHz	Measured 26 dB Bandwidth: 20.842 MHz Measured 99% Bandwidth: 16.513 MHz

[back to matrix](#)




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 34 of 122



26 dB & 99% BANDWIDTH


Variant: 802.11a, Channel: 5200.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

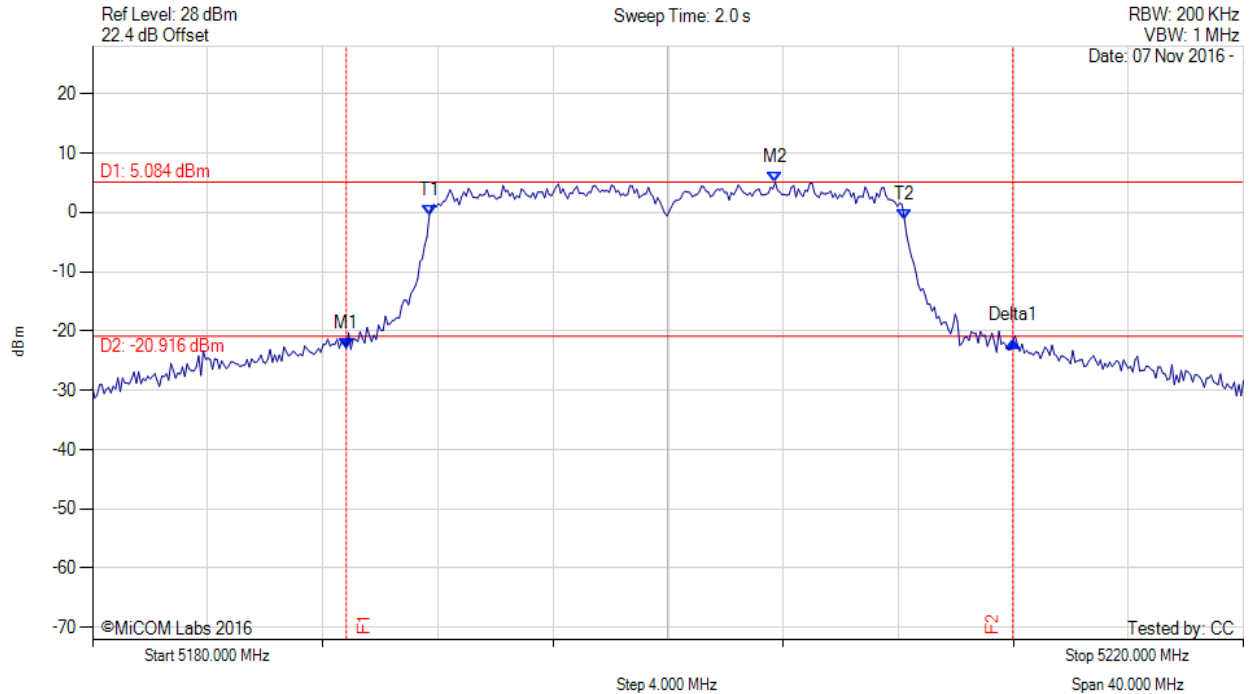

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5188.818 MHz : -22.919 dBm M2 : 5203.727 MHz : 5.084 dBm Delta1 : 23.166 MHz : 1.239 dB T1 : 5191.703 MHz : -0.540 dBm T2 : 5208.216 MHz : -1.166 dBm OBW : 16.513 MHz	Measured 26 dB Bandwidth: 23.166 MHz Measured 99% Bandwidth: 16.513 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

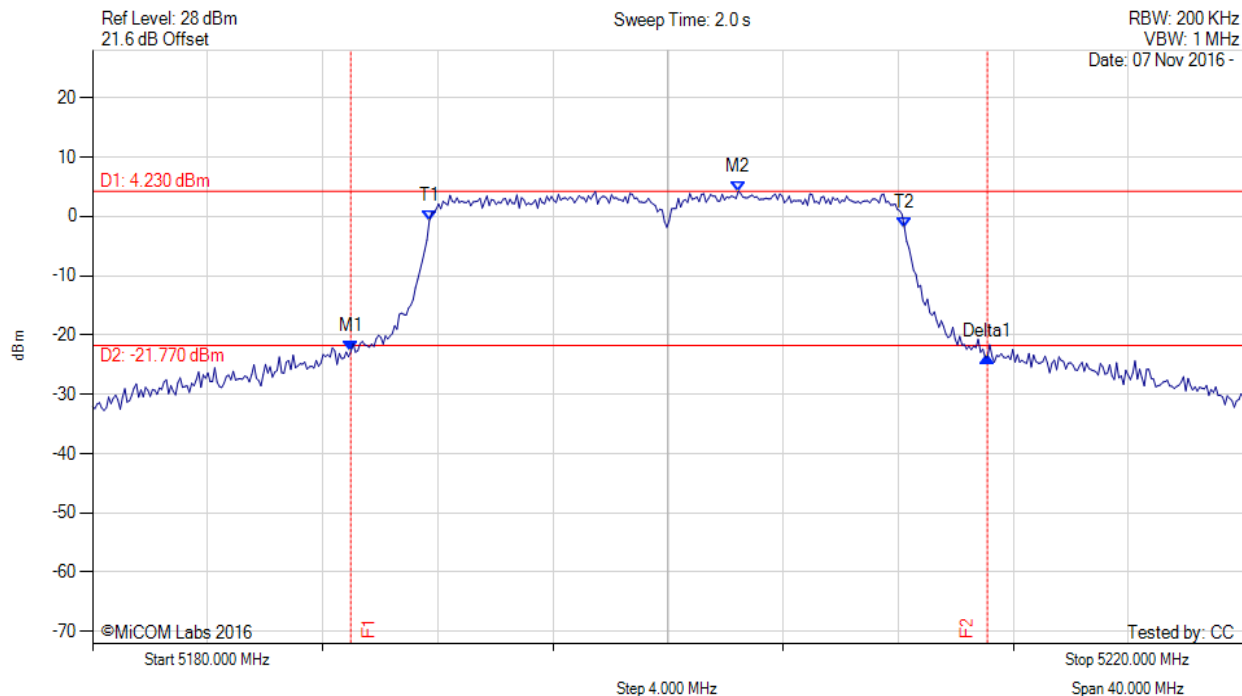


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5188.978 MHz : -22.785 dBm M2 : 5202.445 MHz : 4.230 dBm Delta1 : 22.124 MHz : -0.950 dB T1 : 5191.703 MHz : -0.778 dBm T2 : 5208.216 MHz : -1.880 dBm OBW : 16.513 MHz	Measured 26 dB Bandwidth: 22.124 MHz Measured 99% Bandwidth: 16.513 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5240.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

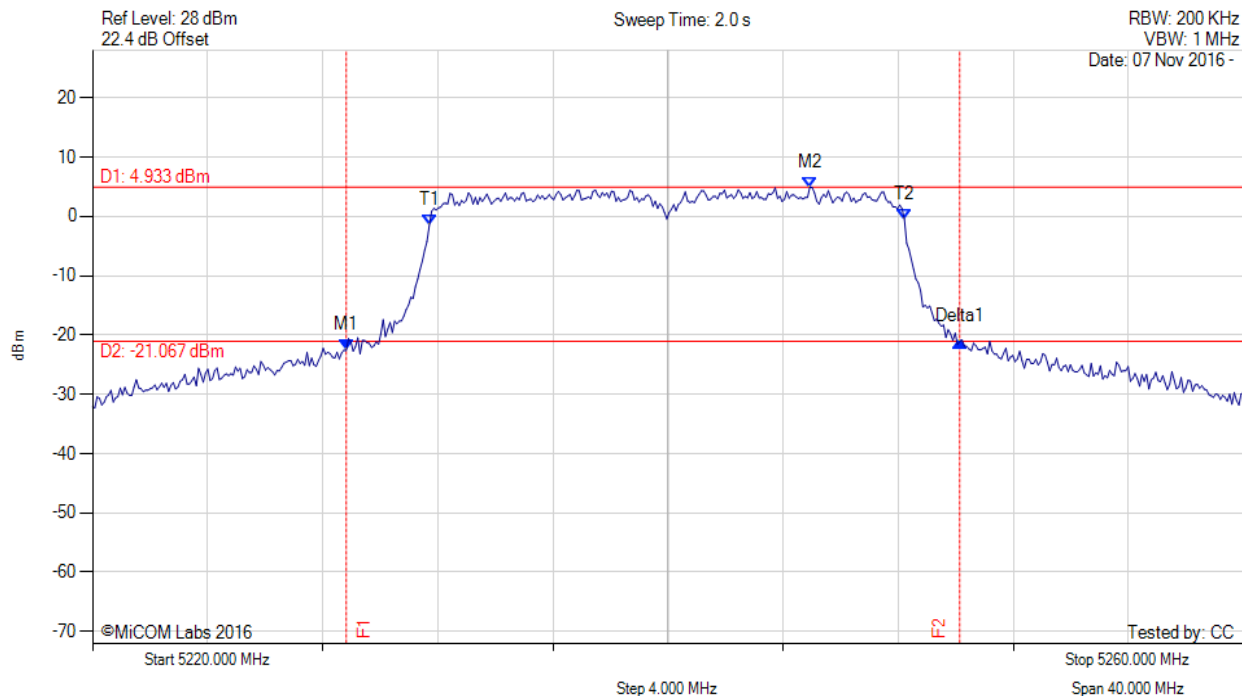

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5228.818 MHz : -22.596 dBm M2 : 5244.930 MHz : 4.933 dBm Delta1 : 21.323 MHz : 1.483 dB T1 : 5231.703 MHz : -1.536 dBm T2 : 5248.216 MHz : -0.562 dBm OBW : 16.513 MHz	Measured 26 dB Bandwidth: 21.323 MHz Measured 99% Bandwidth: 16.513 MHz

[back to matrix](#)




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 37 of 122



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5240.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

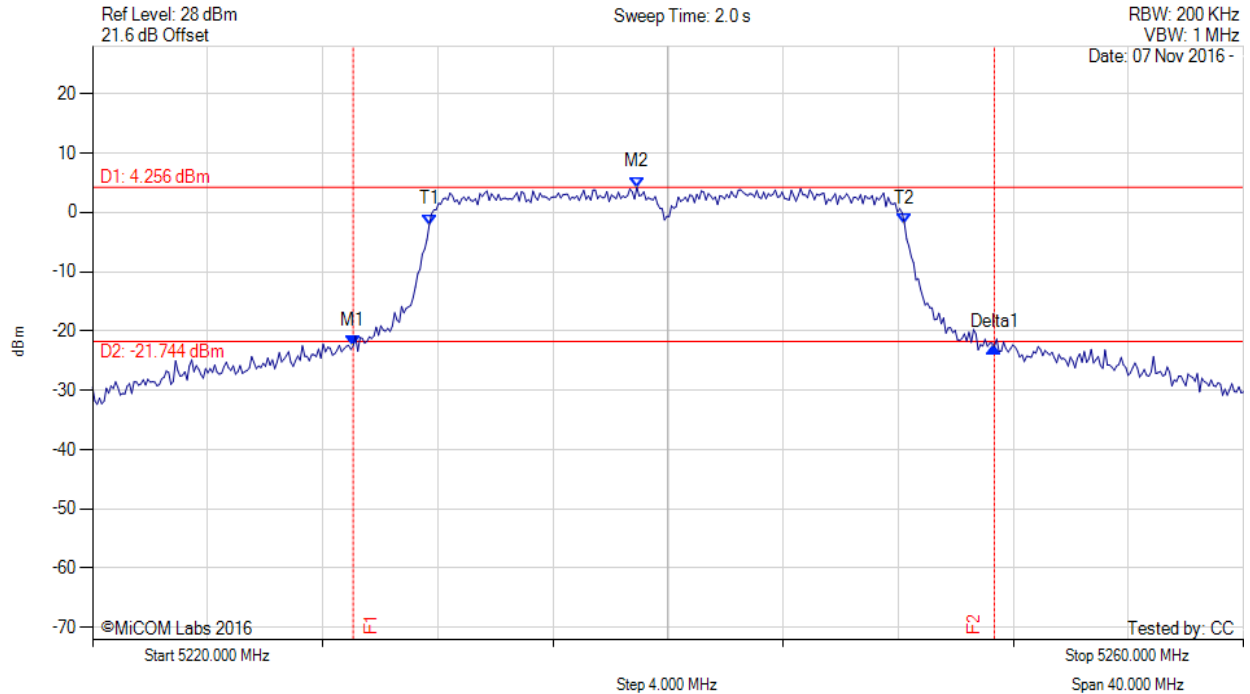

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5229.058 MHz : -22.563 dBm M2 : 5238.918 MHz : 4.256 dBm Delta1 : 22.285 MHz : -0.083 dB T1 : 5231.703 MHz : -2.047 dBm T2 : 5248.216 MHz : -1.857 dBm OBW : 16.513 MHz	Measured 26 dB Bandwidth: 22.285 MHz Measured 99% Bandwidth: 16.513 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWPDP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 38 of 122



26 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5210.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

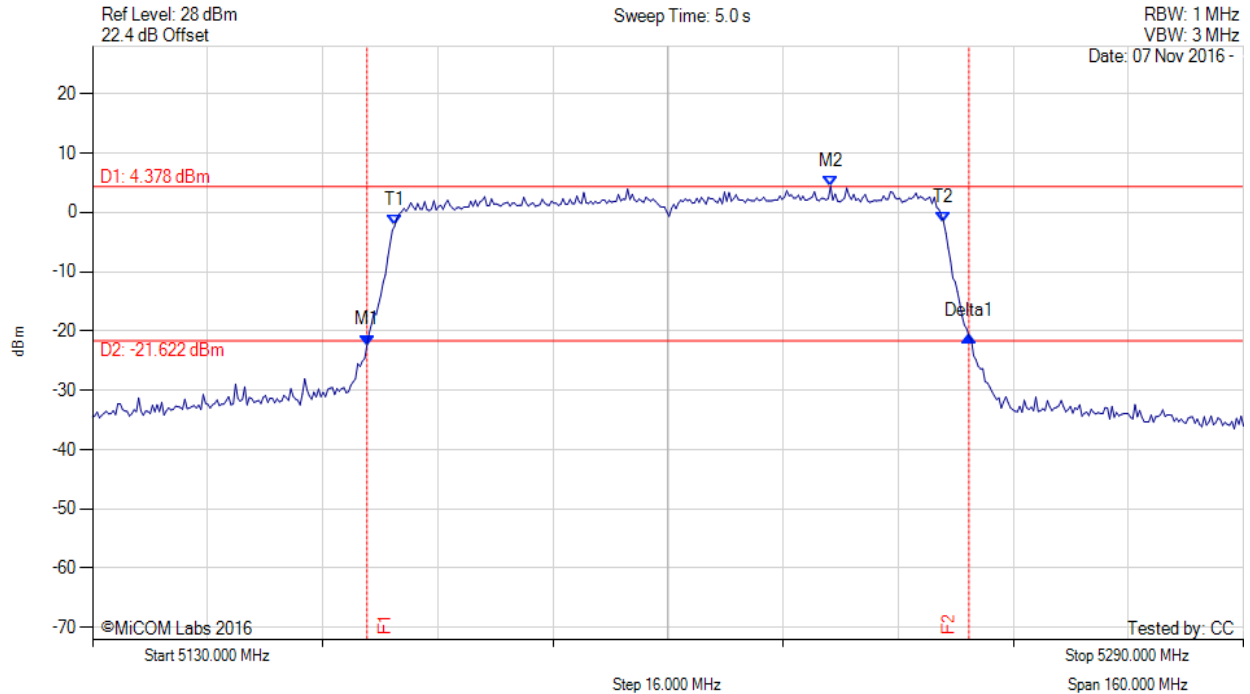

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5168.156 MHz : -22.386 dBm M2 : 5232.605 MHz : 4.378 dBm Delta1 : 83.687 MHz : 1.483 dB T1 : 5172.004 MHz : -2.256 dBm T2 : 5248.317 MHz : -1.615 dBm OBW : 76.313 MHz	Measured 26 dB Bandwidth: 83.687 MHz Measured 99% Bandwidth: 76.313 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 39 of 122



26 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5210.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

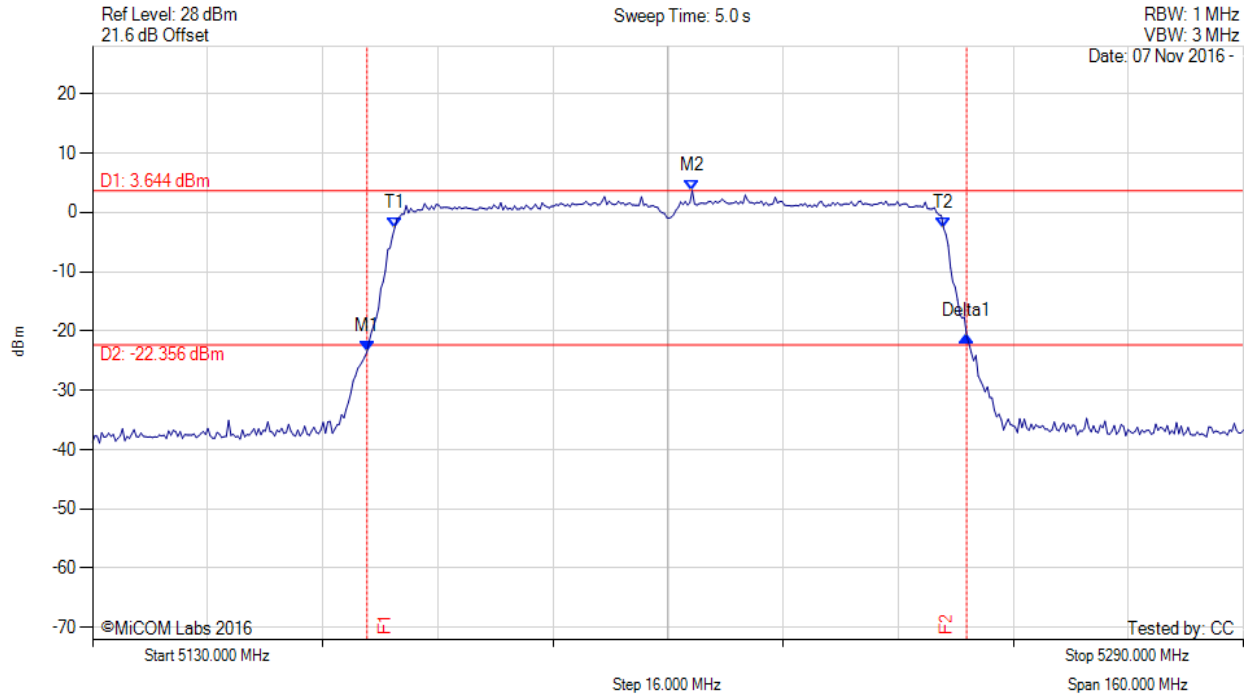

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5168.156 MHz : -23.507 dBm M2 : 5213.367 MHz : 3.644 dBm Delta1 : 83.367 MHz : 2.609 dB T1 : 5172.004 MHz : -2.620 dBm T2 : 5248.317 MHz : -2.683 dBm OBW : 76.313 MHz	Measured 26 dB Bandwidth: 83.367 MHz Measured 99% Bandwidth: 76.313 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 40 of 122



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5180.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

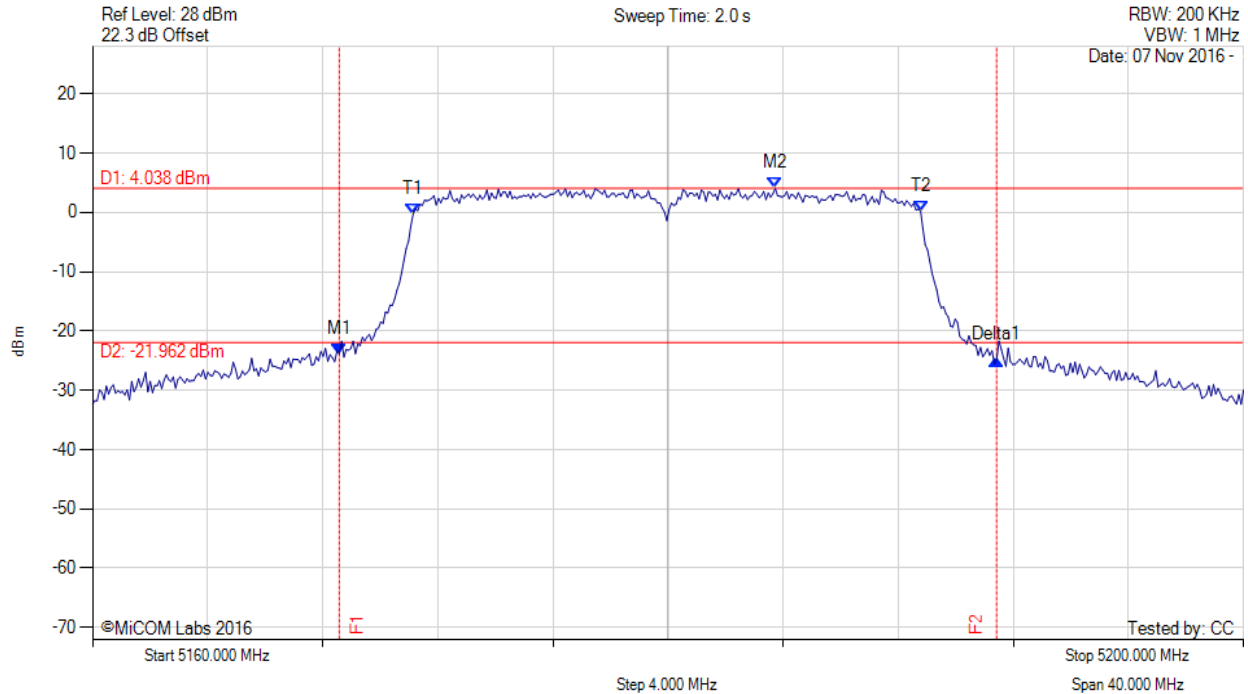

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5168.577 MHz : -23.903 dBm M2 : 5183.727 MHz : 4.038 dBm Delta1 : 22.846 MHz : -0.899 dB T1 : 5171.142 MHz : -0.253 dBm T2 : 5188.778 MHz : 0.254 dBm OBW : 17.635 MHz	Measured 26 dB Bandwidth: 22.846 MHz Measured 99% Bandwidth: 17.635 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 41 of 122



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5180.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

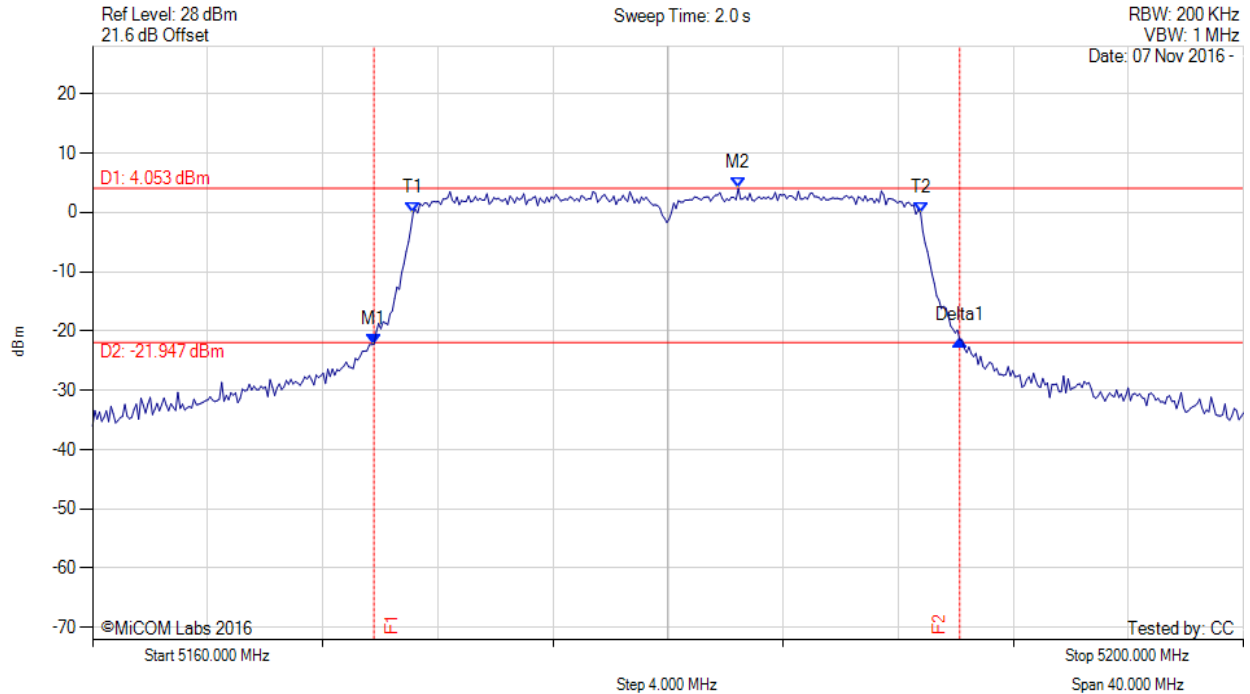

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5169.780 MHz : -22.246 dBm M2 : 5182.445 MHz : 4.053 dBm Delta1 : 20.361 MHz : 0.732 dB T1 : 5171.142 MHz : -0.066 dBm T2 : 5188.778 MHz : -0.060 dBm OBW : 17.635 MHz	Measured 26 dB Bandwidth: 20.361 MHz Measured 99% Bandwidth: 17.635 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 42 of 122



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5200.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

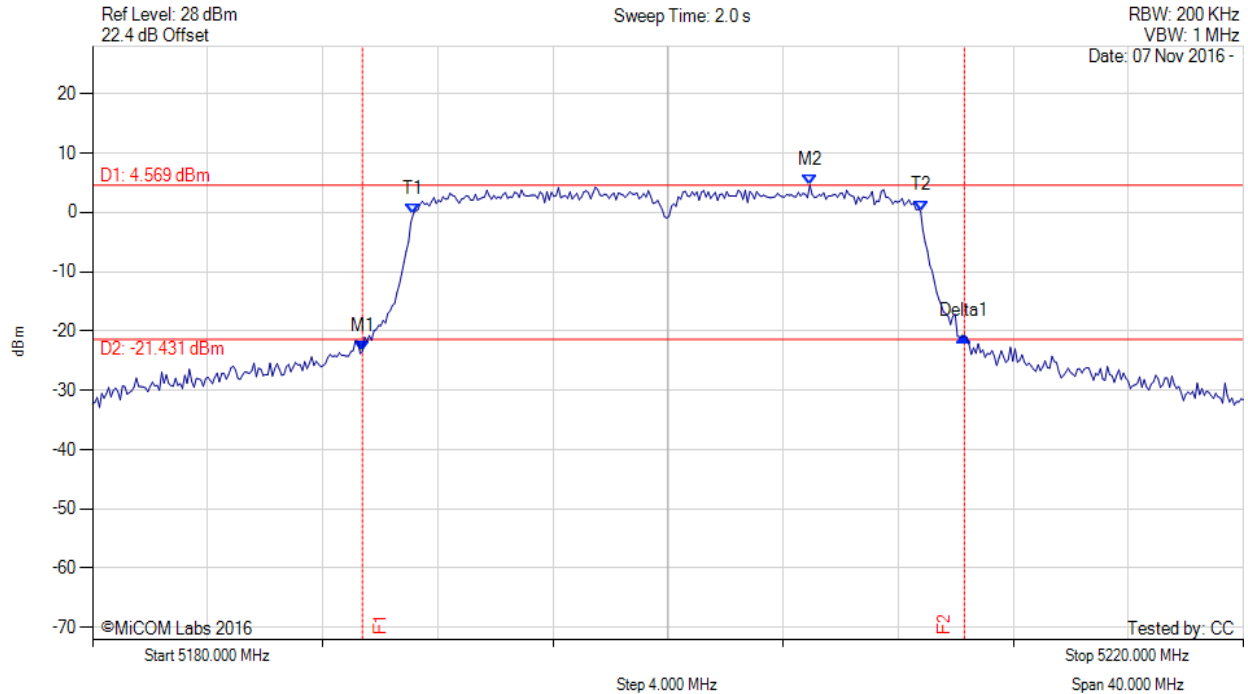

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5189.379 MHz : -23.440 dBm M2 : 5204.930 MHz : 4.569 dBm Delta1 : 20.922 MHz : 2.575 dB T1 : 5191.142 MHz : -0.308 dBm T2 : 5208.778 MHz : 0.284 dBm OBW : 17.635 MHz	Measured 26 dB Bandwidth: 20.922 MHz Measured 99% Bandwidth: 17.635 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 43 of 122



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5200.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

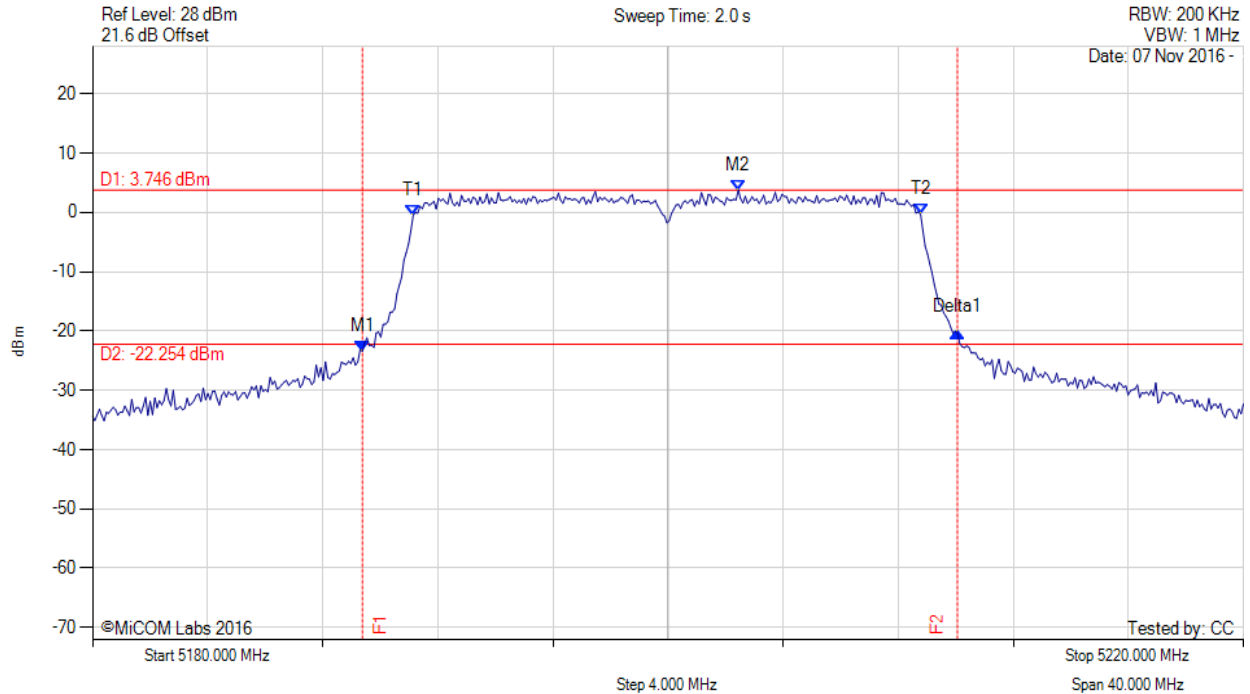

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5189.379 MHz : -23.403 dBm M2 : 5202.445 MHz : 3.746 dBm Delta1 : 20.681 MHz : 3.165 dB T1 : 5191.142 MHz : -0.529 dBm T2 : 5208.778 MHz : -0.310 dBm OBW : 17.635 MHz	Measured 26 dB Bandwidth: 20.681 MHz Measured 99% Bandwidth: 17.635 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 44 of 122



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5240.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

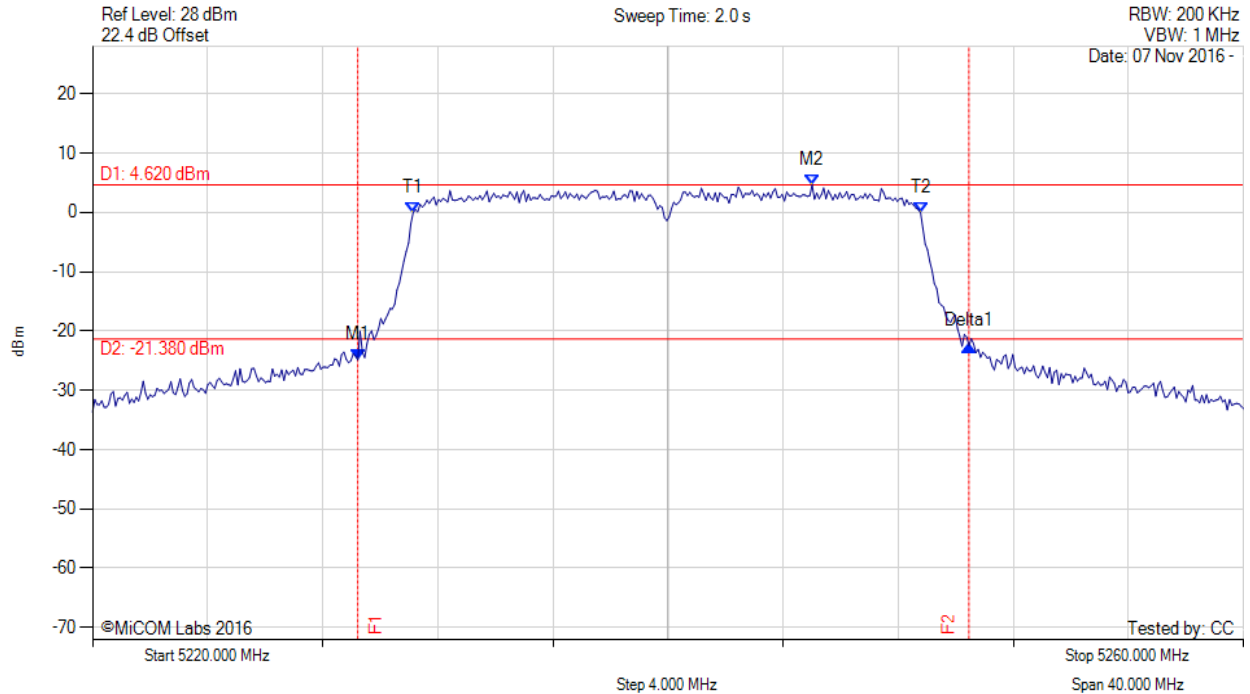

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5229.218 MHz : -24.877 dBm M2 : 5245.010 MHz : 4.620 dBm Delta1 : 21.242 MHz : 2.424 dB T1 : 5231.142 MHz : -0.017 dBm T2 : 5248.778 MHz : -0.066 dBm OBW : 17.635 MHz	Measured 26 dB Bandwidth: 21.242 MHz Measured 99% Bandwidth: 17.635 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 45 of 122



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5240.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

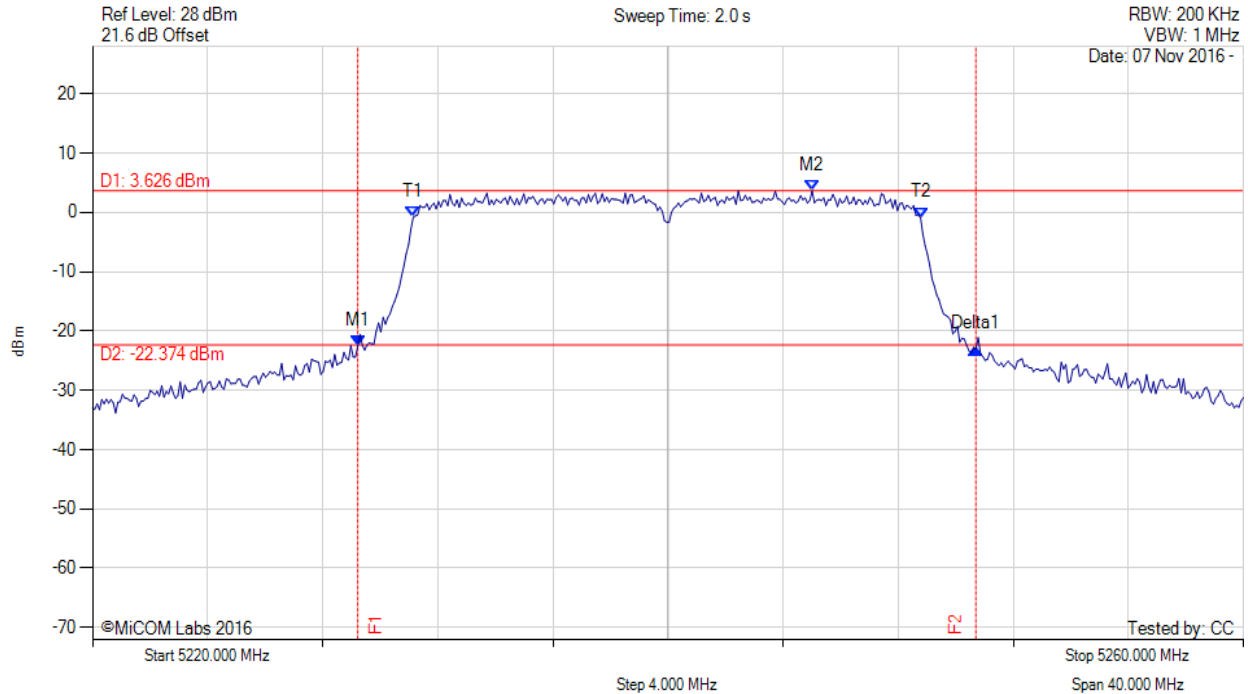

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5229.218 MHz : -22.445 dBm M2 : 5245.010 MHz : 3.626 dBm Delta1 : 21.483 MHz : -0.563 dB T1 : 5231.142 MHz : -0.851 dBm T2 : 5248.778 MHz : -0.904 dBm OBW : 17.635 MHz	Measured 26 dB Bandwidth: 21.483 MHz Measured 99% Bandwidth: 17.635 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 46 of 122



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5190.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

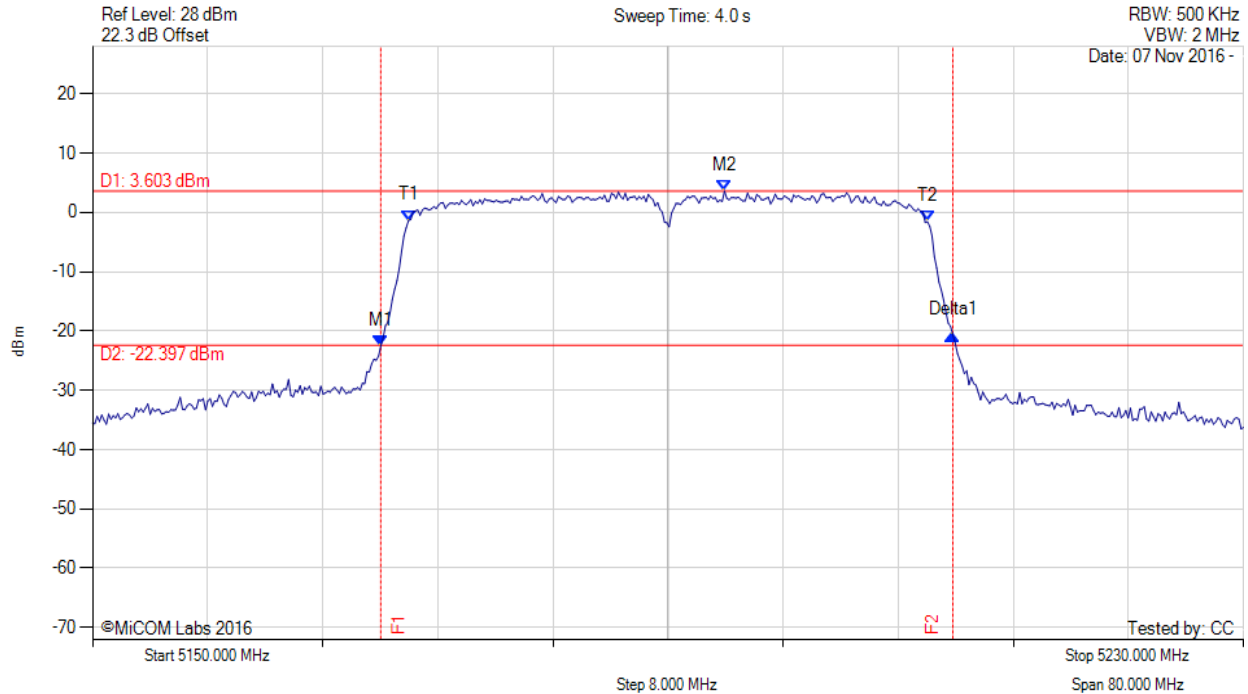

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5170.040 MHz : -22.510 dBm M2 : 5193.928 MHz : 3.603 dBm Delta1 : 39.760 MHz : 1.877 dB T1 : 5171.964 MHz : -1.349 dBm T2 : 5208.036 MHz : -1.573 dBm OBW : 36.072 MHz	Measured 26 dB Bandwidth: 39.760 MHz Measured 99% Bandwidth: 36.072 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 47 of 122



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5190.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

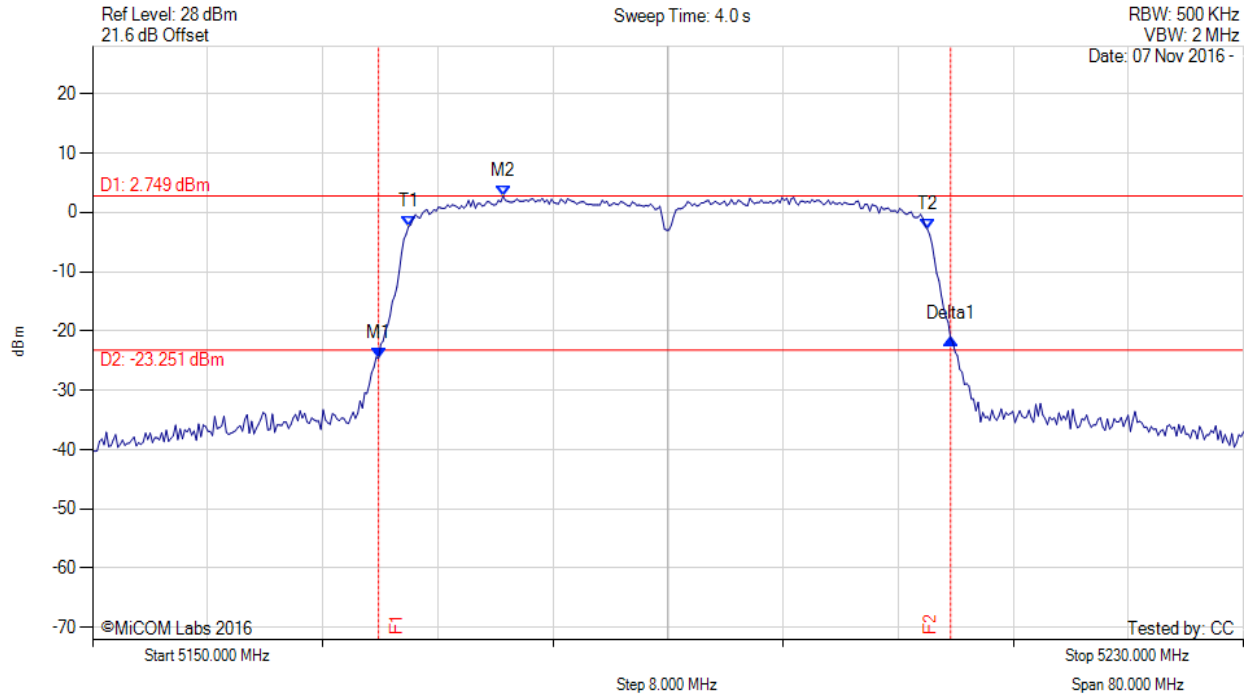

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5169.880 MHz : -24.621 dBm M2 : 5178.537 MHz : 2.749 dBm Delta1 : 39.760 MHz : 3.331 dB T1 : 5171.964 MHz : -2.386 dBm T2 : 5208.036 MHz : -2.854 dBm OBW : 36.072 MHz	Measured 26 dB Bandwidth: 39.760 MHz Measured 99% Bandwidth: 36.072 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 48 of 122



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5230.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

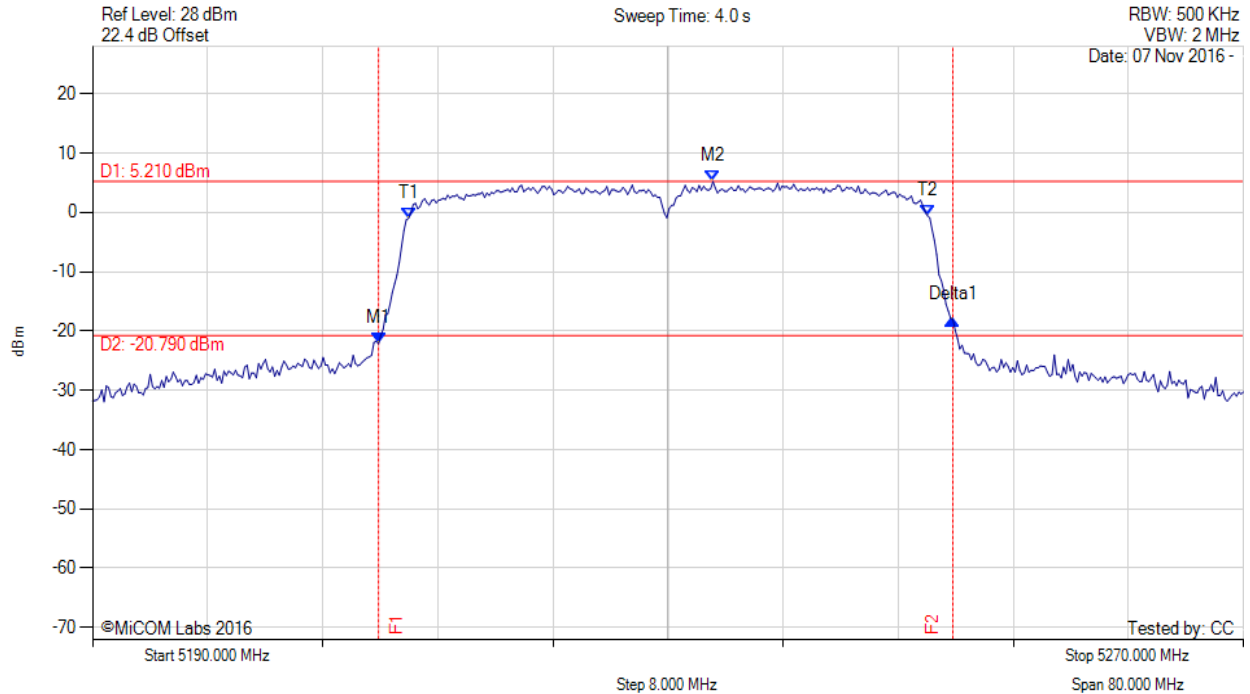

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5209.880 MHz : -22.116 dBm M2 : 5233.126 MHz : 5.210 dBm Delta1 : 39.920 MHz : 4.124 dB T1 : 5211.964 MHz : -0.995 dBm T2 : 5248.036 MHz : -0.546 dBm OBW : 36.072 MHz	Measured 26 dB Bandwidth: 39.920 MHz Measured 99% Bandwidth: 36.072 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 49 of 122



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5230.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

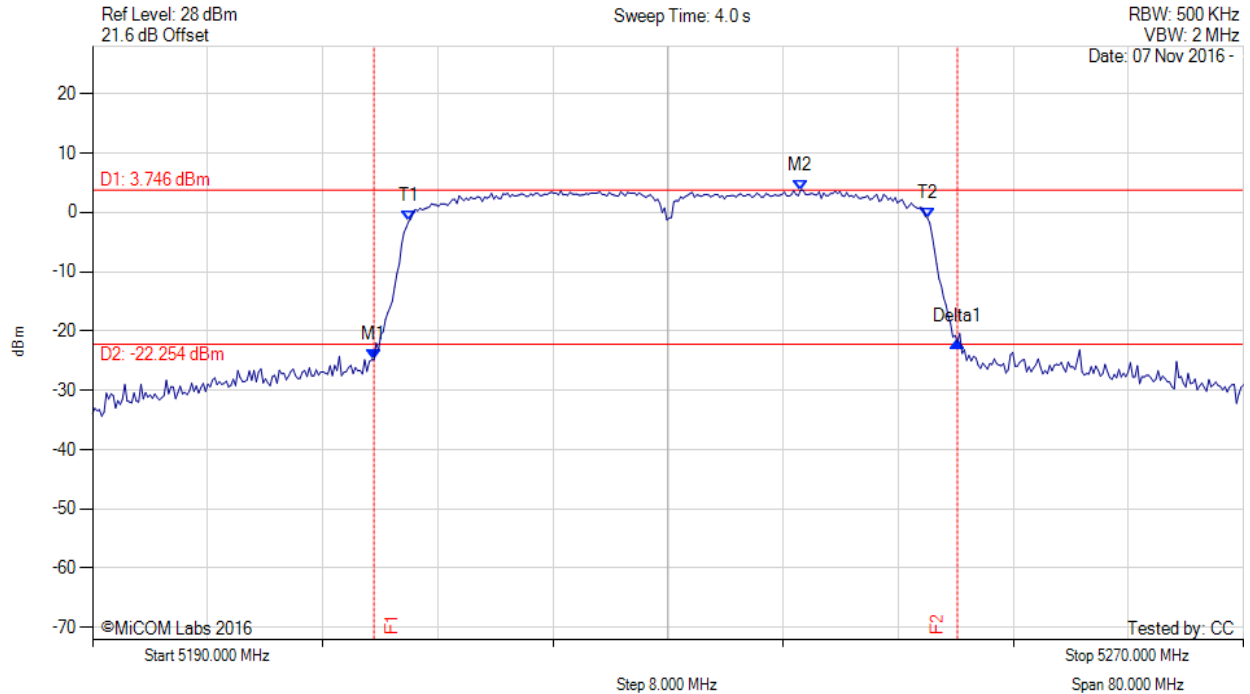

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5209.559 MHz : -24.879 dBm M2 : 5239.218 MHz : 3.746 dBm Delta1 : 40.561 MHz : 3.018 dB T1 : 5211.964 MHz : -1.550 dBm T2 : 5248.036 MHz : -0.924 dBm OBW : 36.072 MHz	Measured 26 dB Bandwidth: 40.561 MHz Measured 99% Bandwidth: 36.072 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

A.2. 6 dB & 99% Bandwidth



6 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5745.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

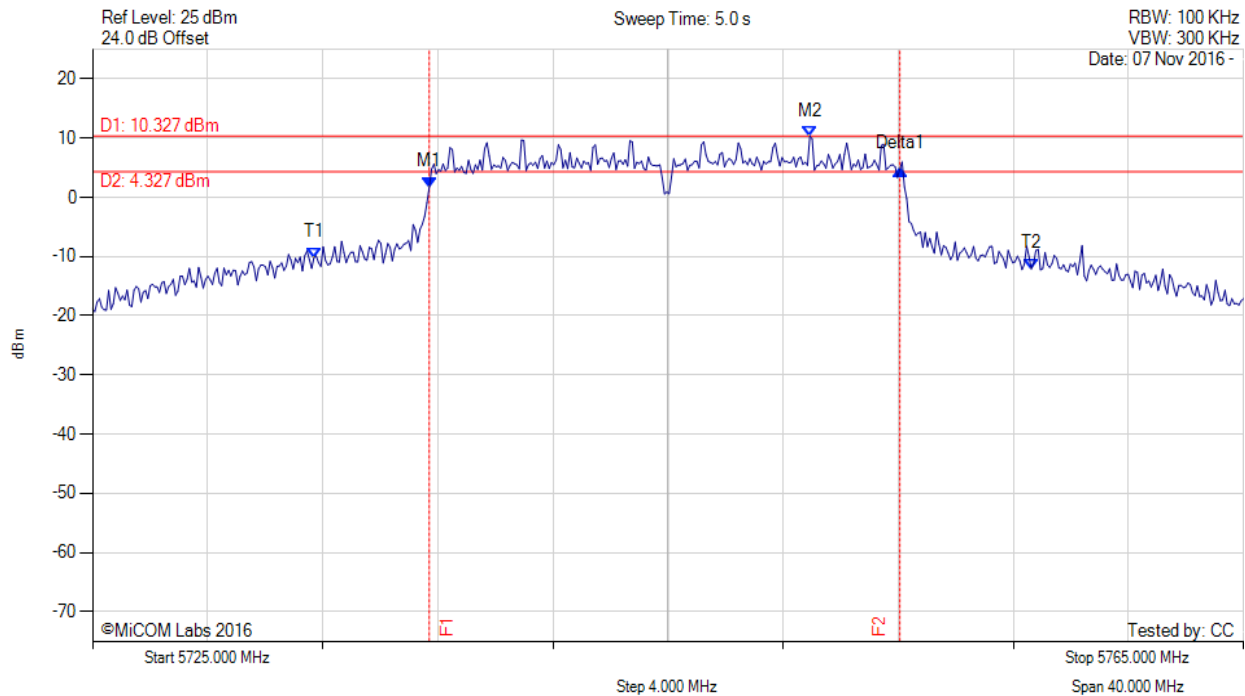

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5736.703 MHz : 1.730 dBm M2 : 5749.930 MHz : 10.327 dBm Delta1 : 16.353 MHz : 3.022 dB T1 : 5732.695 MHz : -10.194 dBm T2 : 5757.625 MHz : -12.075 dBm OBW : 24.930 MHz	Measured 6 dB Bandwidth: 16.353 MHz Measured 99% Bandwidth: 24.930 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 51 of 122



6 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5745.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

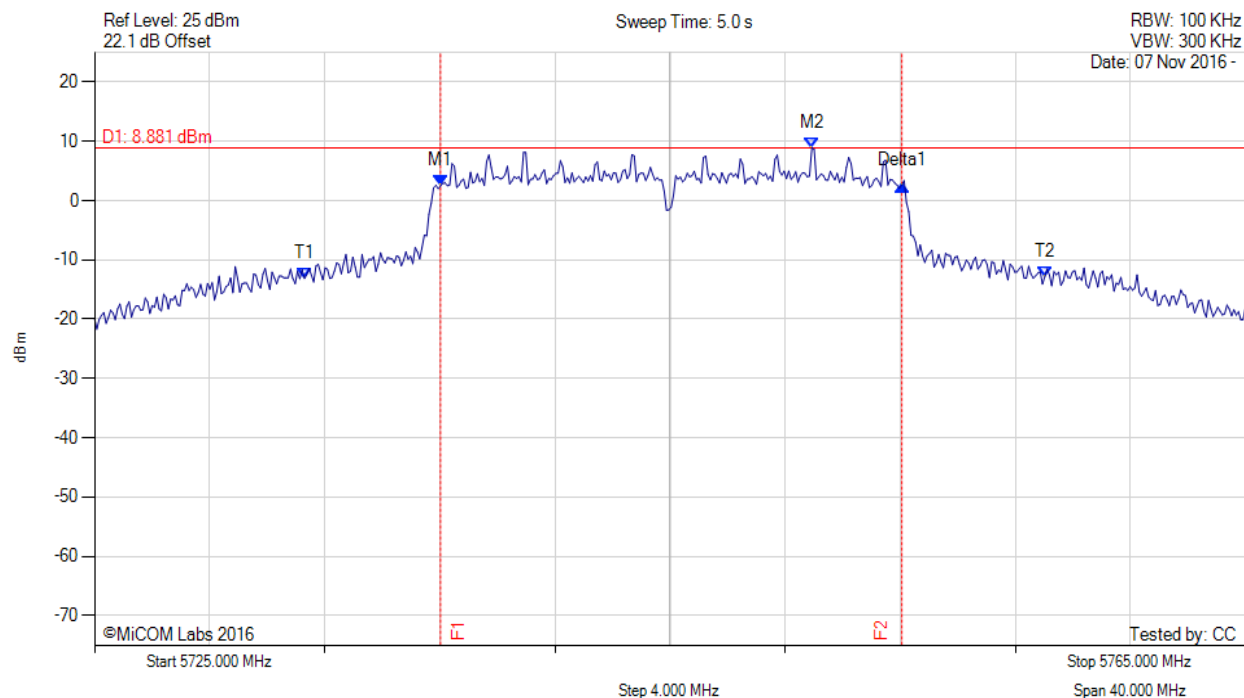

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5737.024 MHz : 2.484 dBm M2 : 5749.930 MHz : 8.881 dBm Delta1 : 16.032 MHz : 0.148 dB T1 : 5732.295 MHz : -13.127 dBm T2 : 5758.026 MHz : -12.811 dBm OBW : 25.731 MHz	Measured 6 dB Bandwidth: 16.032 MHz Measured 99% Bandwidth: 25.731 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWPDP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 52 of 122



6 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5785.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

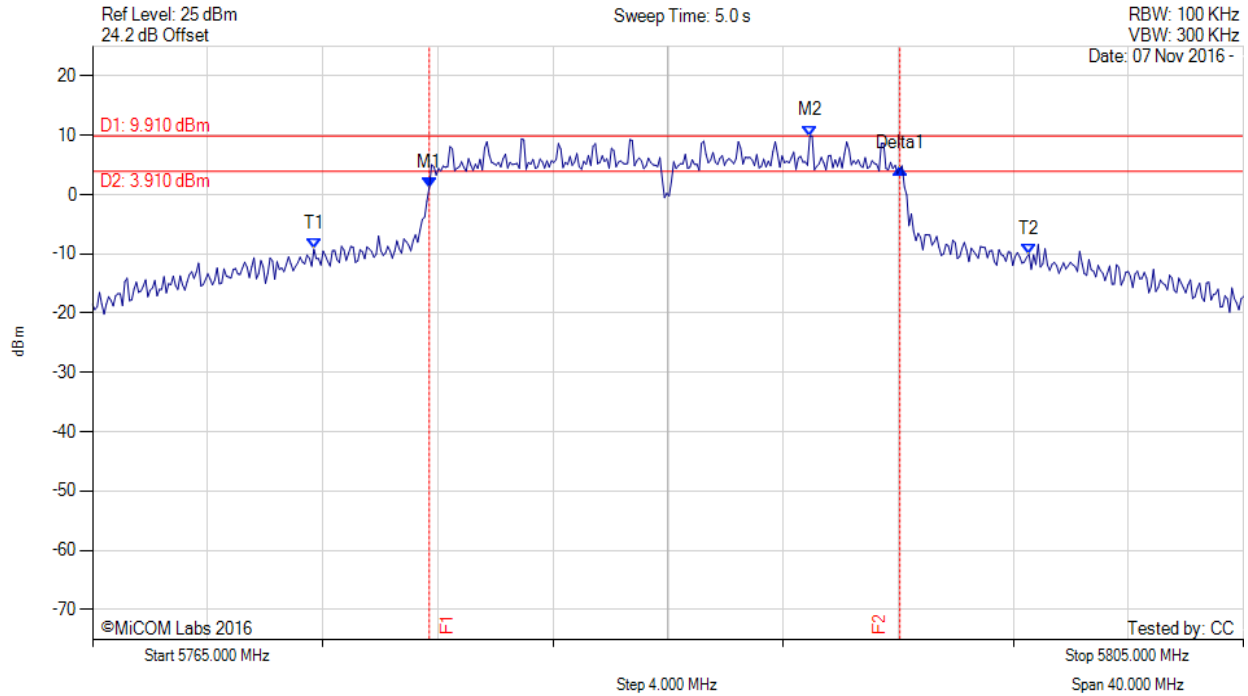

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5776.703 MHz : 1.228 dBm M2 : 5789.930 MHz : 9.910 dBm Delta1 : 16.353 MHz : 3.081 dB T1 : 5772.695 MHz : -9.199 dBm T2 : 5797.545 MHz : -10.070 dBm OBW : 24.850 MHz	Measured 6 dB Bandwidth: 16.353 MHz Measured 99% Bandwidth: 24.850 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 53 of 122



6 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5785.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

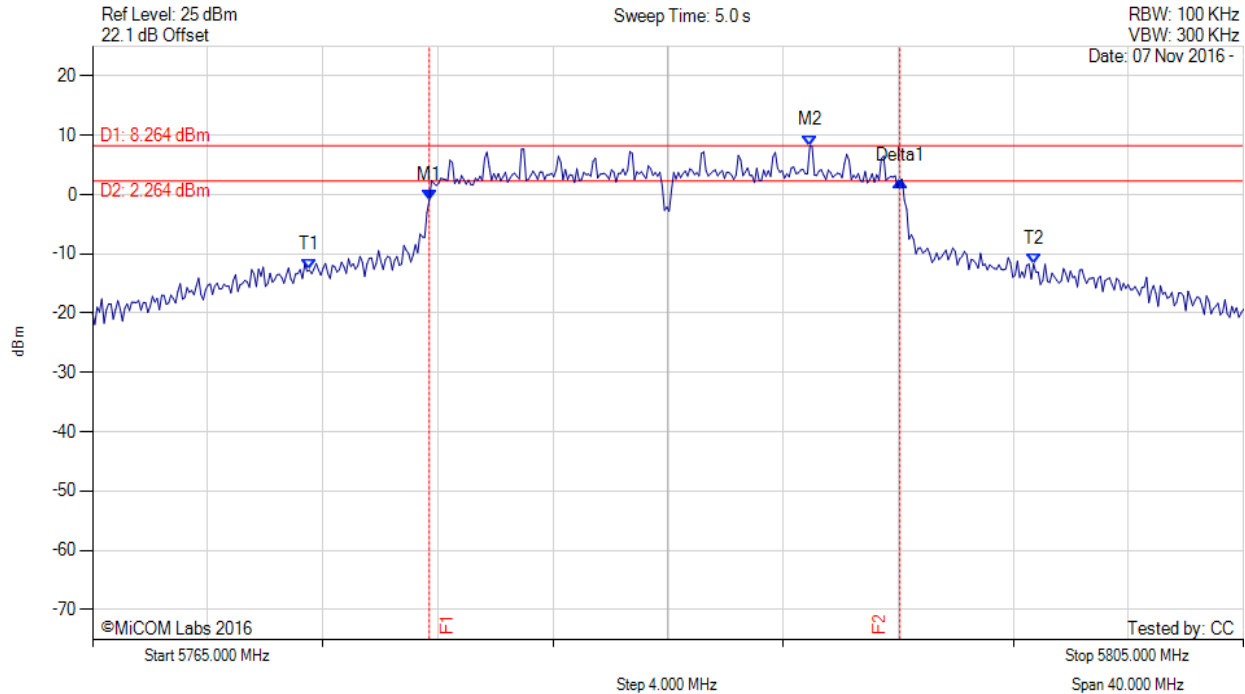

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5776.703 MHz : -0.955 dBm M2 : 5789.930 MHz : 8.264 dBm Delta1 : 16.353 MHz : 3.223 dB T1 : 5772.535 MHz : -12.728 dBm T2 : 5797.705 MHz : -11.681 dBm OBW : 25.170 MHz	Measured 6 dB Bandwidth: 16.353 MHz Measured 99% Bandwidth: 25.170 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWPDP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 54 of 122



6 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5825.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

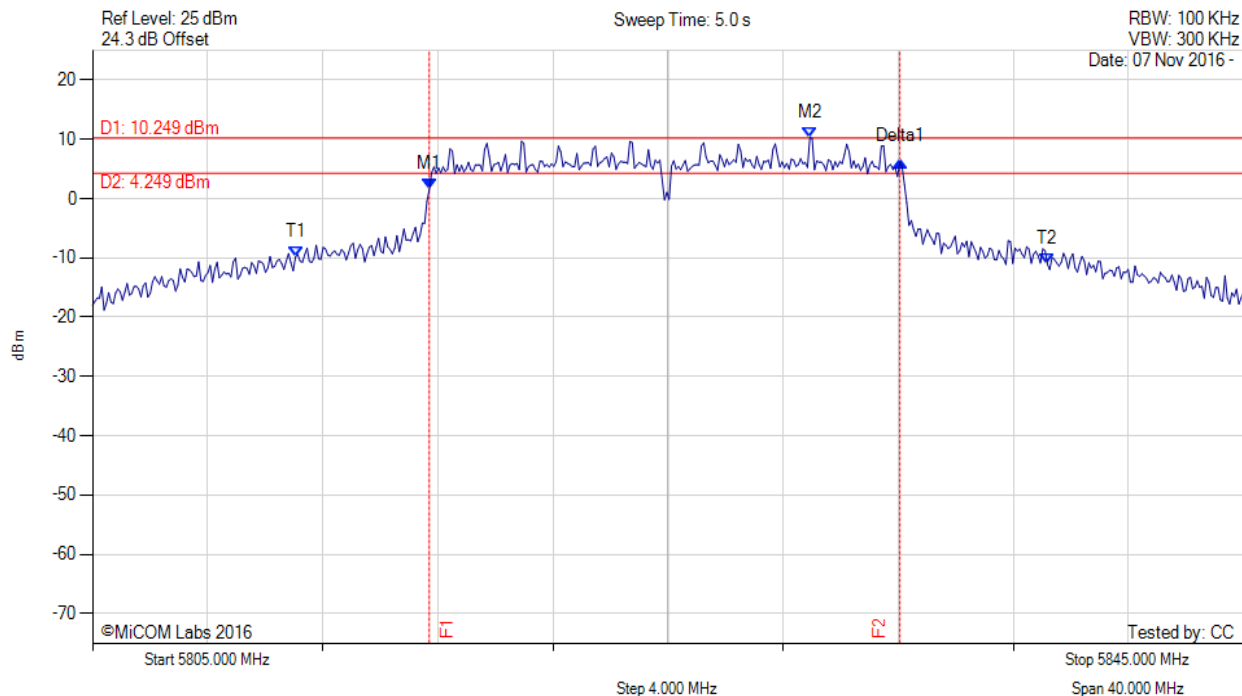

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5816.703 MHz : 1.524 dBm M2 : 5829.930 MHz : 10.249 dBm Delta1 : 16.353 MHz : 4.653 dB T1 : 5812.054 MHz : -9.824 dBm T2 : 5838.186 MHz : -11.064 dBm OBW : 26.132 MHz	Measured 6 dB Bandwidth: 16.353 MHz Measured 99% Bandwidth: 26.132 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 55 of 122



6 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5825.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

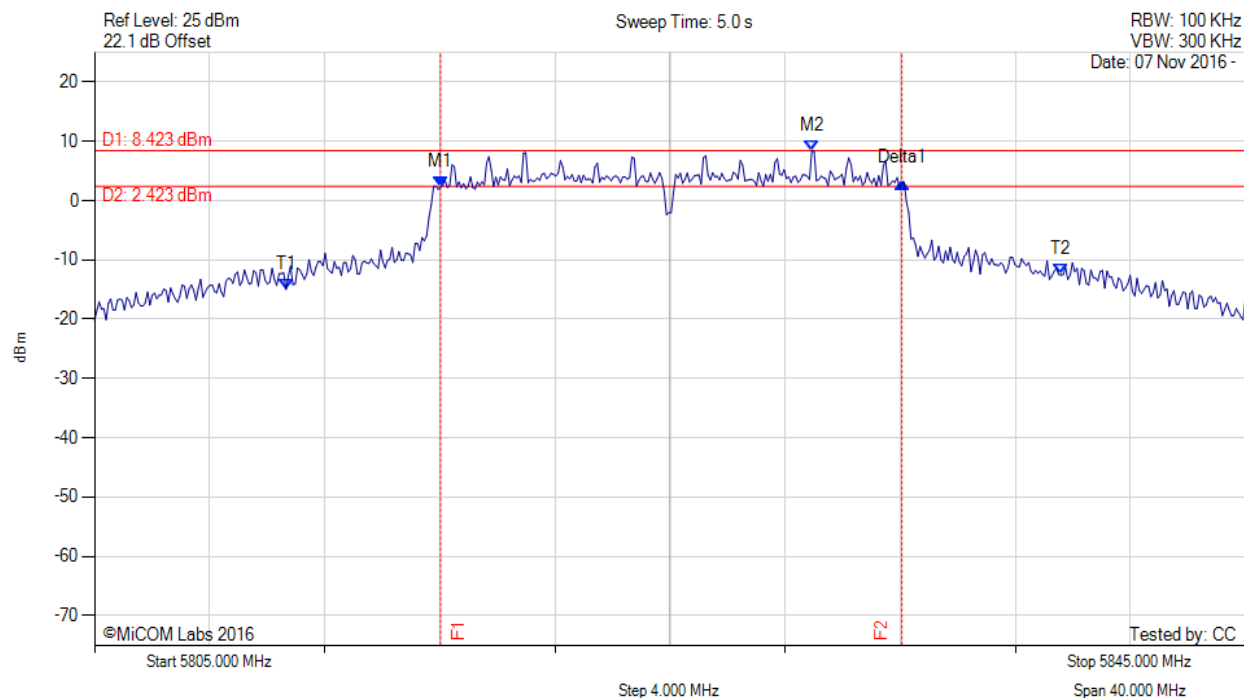

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5817.024 MHz : 2.354 dBm M2 : 5829.930 MHz : 8.423 dBm Delta1 : 16.032 MHz : 0.702 dB T1 : 5811.653 MHz : -15.002 dBm T2 : 5838.587 MHz : -12.523 dBm OBW : 26.934 MHz	Measured 6 dB Bandwidth: 16.032 MHz Measured 99% Bandwidth: 26.934 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 56 of 122



6 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

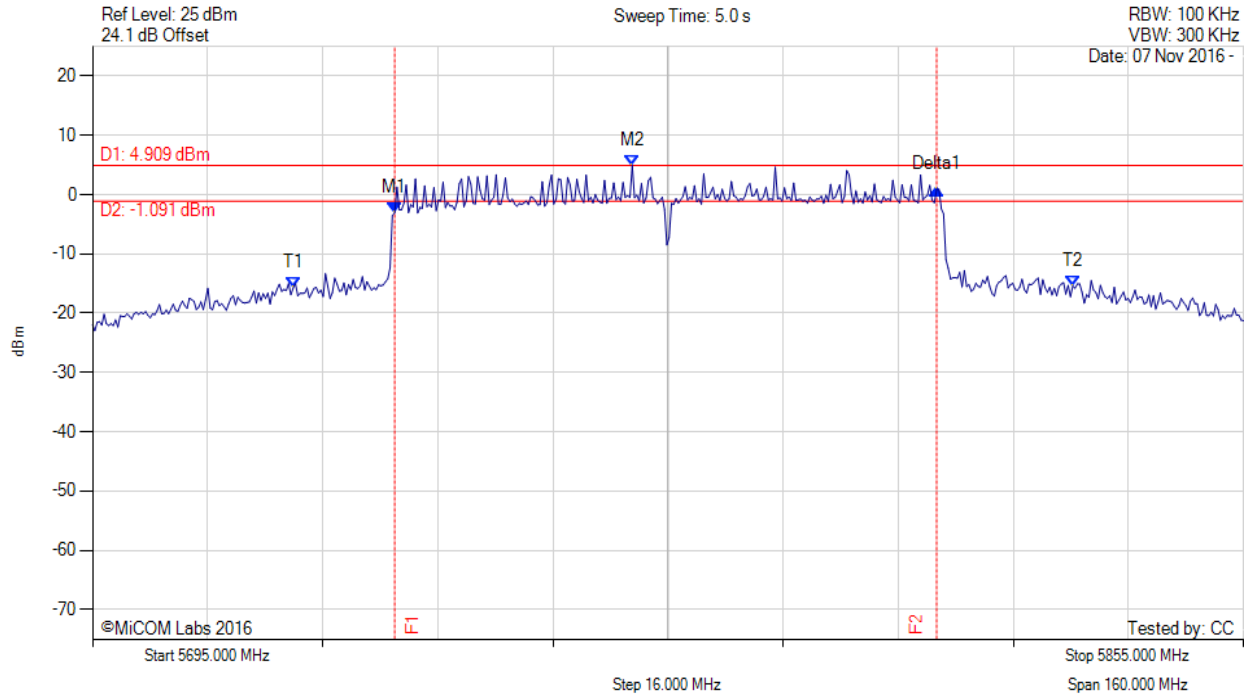

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5737.004 MHz : -3.060 dBm M2 : 5770.030 MHz : 4.909 dBm Delta1 : 75.351 MHz : 3.968 dB T1 : 5722.896 MHz : -15.744 dBm T2 : 5831.273 MHz : -15.423 dBm OBW : 108.377 MHz	Measured 26 dB Bandwidth: 75.351 MHz Measured 99% Bandwidth: 108.377 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 57 of 122



6 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

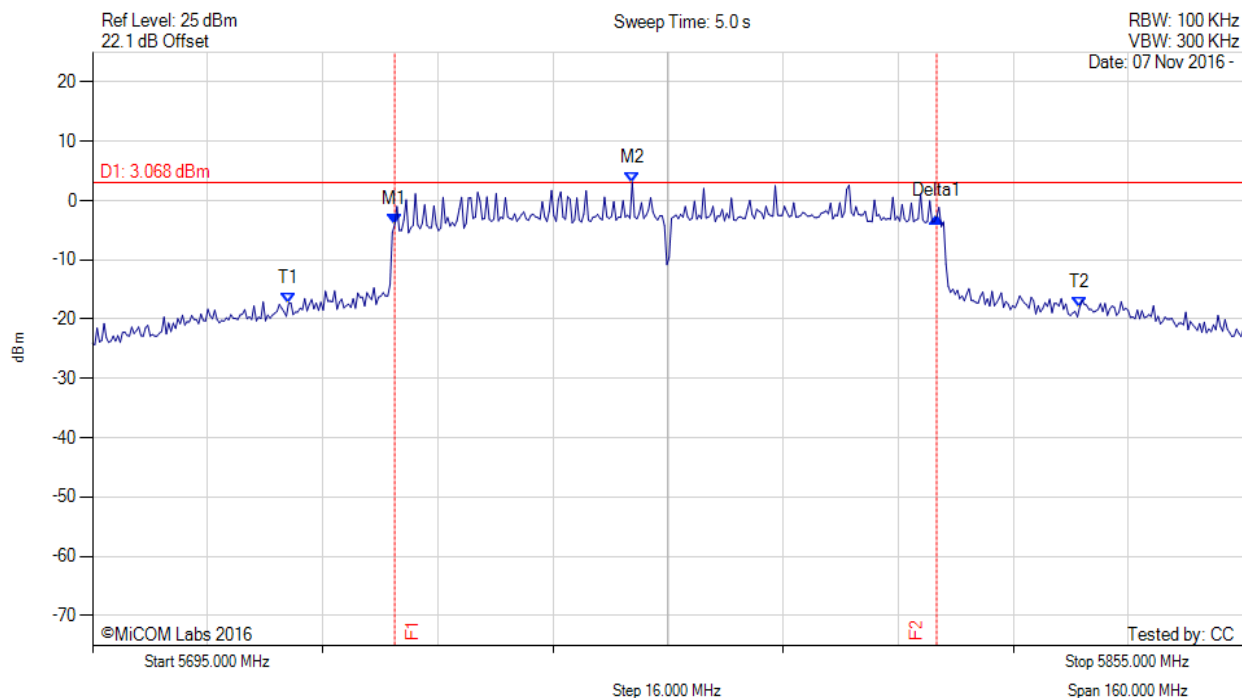

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5737.004 MHz : -4.046 dBm M2 : 5770.030 MHz : 3.068 dBm Delta1 : 75.351 MHz : 1.324 dB T1 : 5722.255 MHz : -17.353 dBm T2 : 5832.234 MHz : -18.014 dBm OBW : 109.980 MHz	Measured 26 dB Bandwidth: 75.351 MHz Measured 99% Bandwidth: 109.980 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 58 of 122



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5745.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

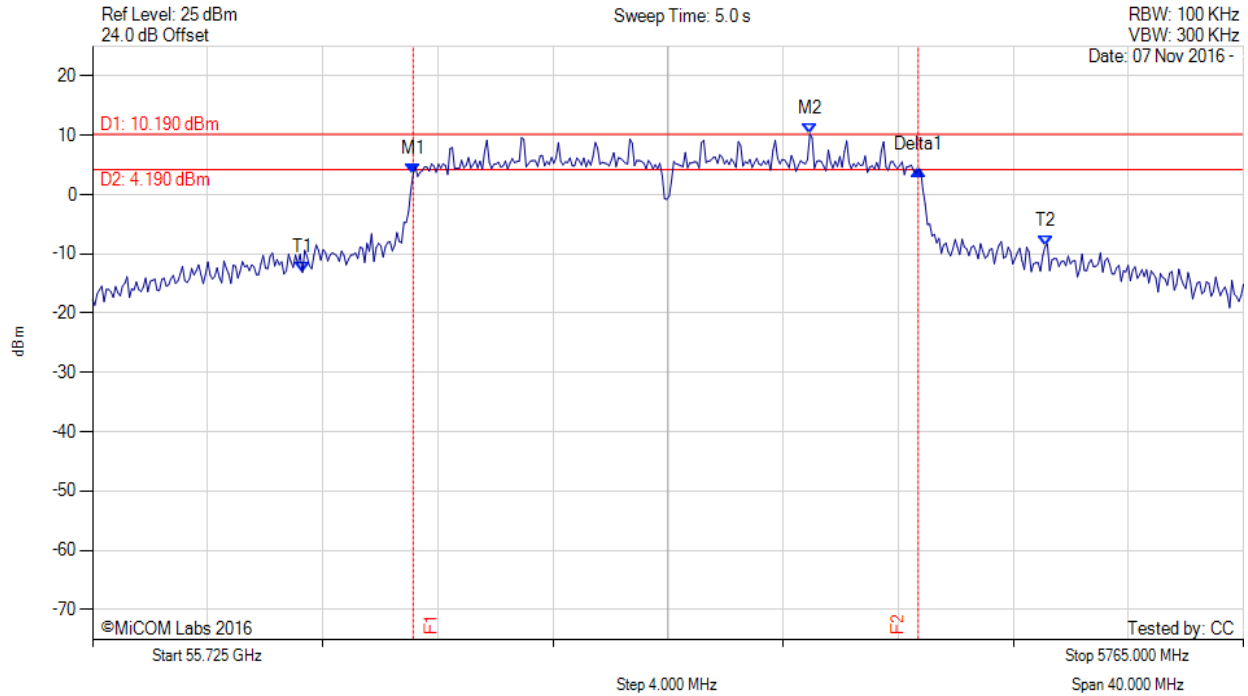

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5736.142 MHz : 3.489 dBm M2 : 5749.930 MHz : 10.190 dBm Delta1 : 17.555 MHz : 0.657 dB T1 : 5732.295 MHz : -13.135 dBm T2 : 5758.106 MHz : -8.752 dBm OBW : 25.812 MHz	Channel Frequency: 5745.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 59 of 122



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5745.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

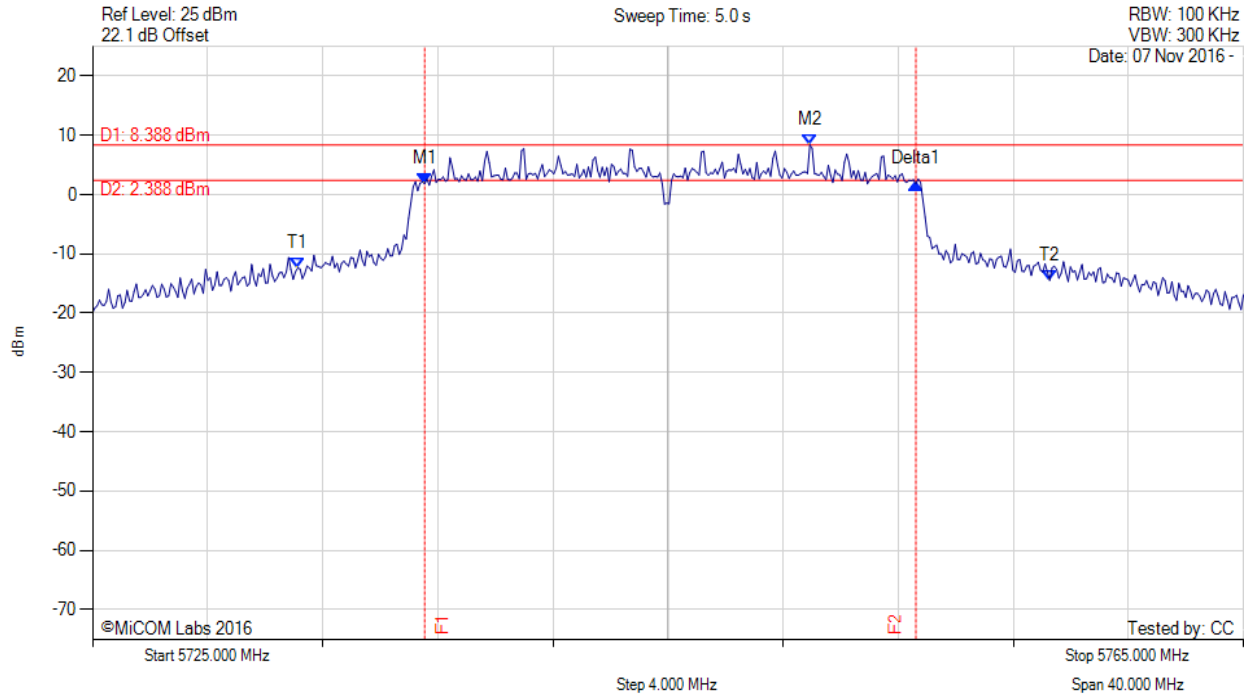

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	ERROR!!! MULTIPLE TEST RESULTS MATCHES...	Measured 6 dB Bandwidth: 17.074 MHz Measured 99% Bandwidth: 26.132 MHz ERROR!!! MULTIPLE TEST RESULTS MATCHES...

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 60 of 122



6 dB & 99% BANDWIDTH


Variant: 802.11n HT-20, Channel: 5785.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

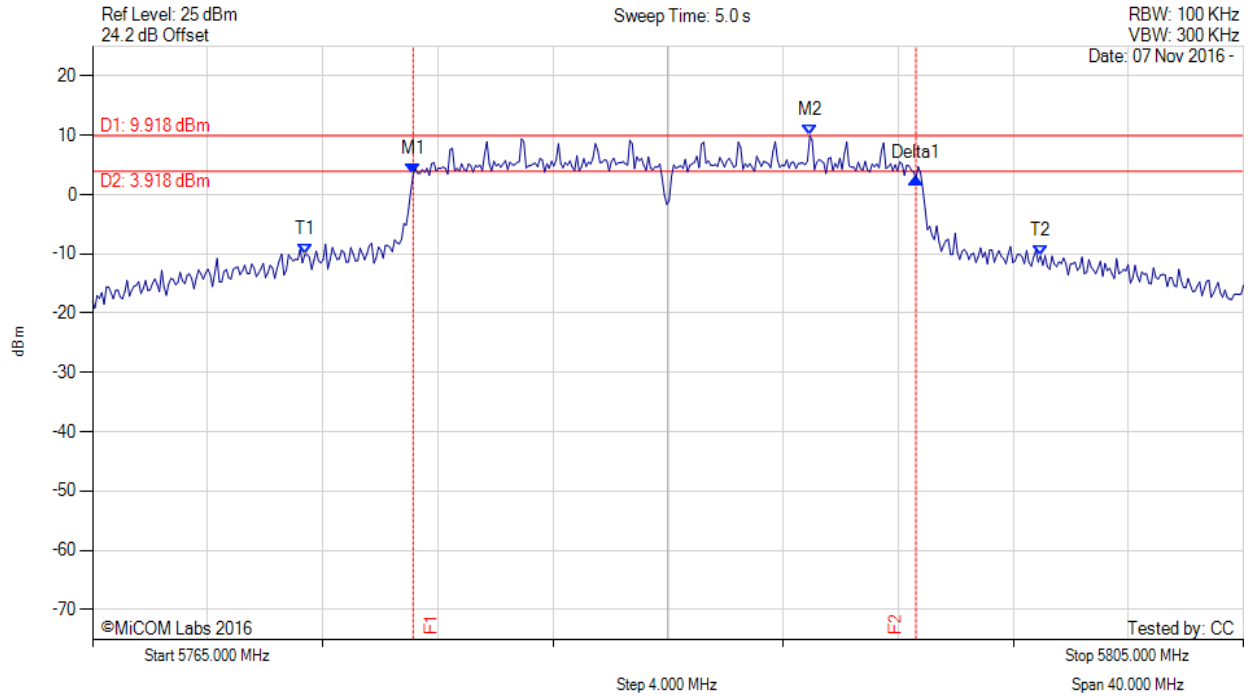

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5776.142 MHz : 3.379 dBm M2 : 5789.930 MHz : 9.918 dBm Delta1 : 17.475 MHz : -0.622 dB T1 : 5772.375 MHz : -10.131 dBm T2 : 5797.946 MHz : -10.310 dBm OBW : 25.571 MHz	Measured 6 dB Bandwidth: 17.475 MHz Measured 99% Bandwidth: 25.571 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

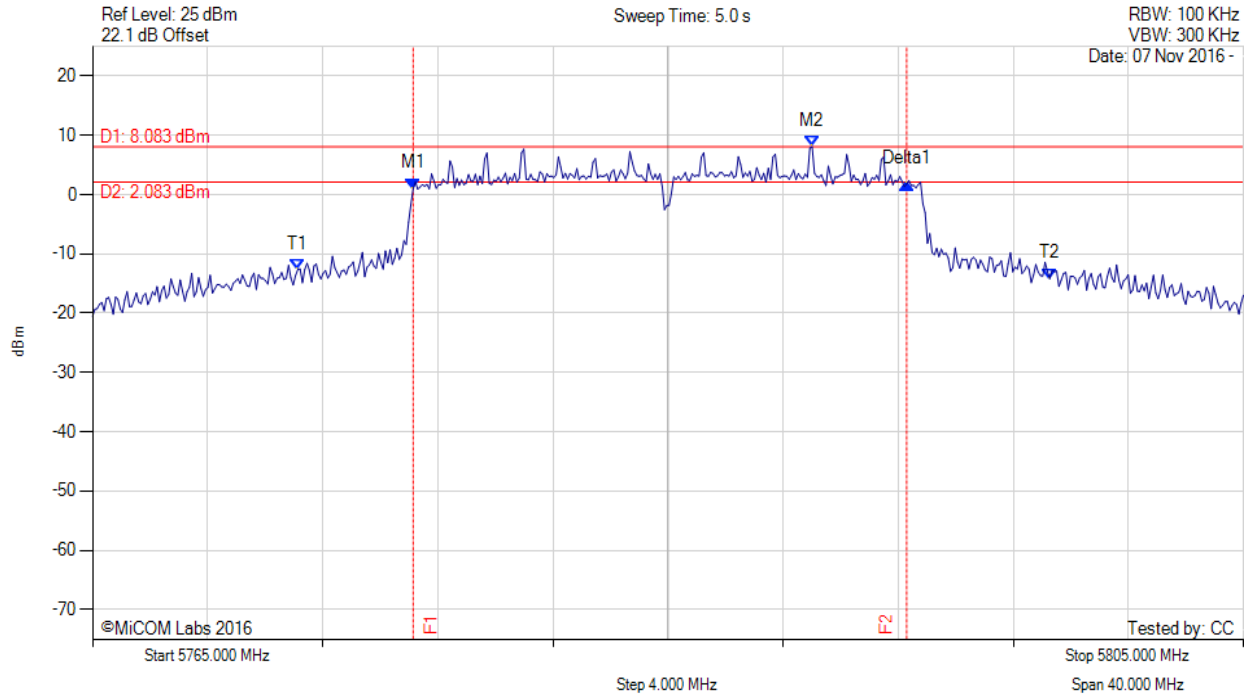

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5776.142 MHz : 1.010 dBm M2 : 5790.010 MHz : 8.083 dBm Delta1 : 17.154 MHz : 0.752 dB T1 : 5772.134 MHz : -12.634 dBm T2 : 5798.267 MHz : -14.188 dBm OBW : 26.132 MHz	Measured 6 dB Bandwidth: 17.154 MHz Measured 99% Bandwidth: 26.132 MHz

[back to matrix](#)




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 62 of 122



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5825.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

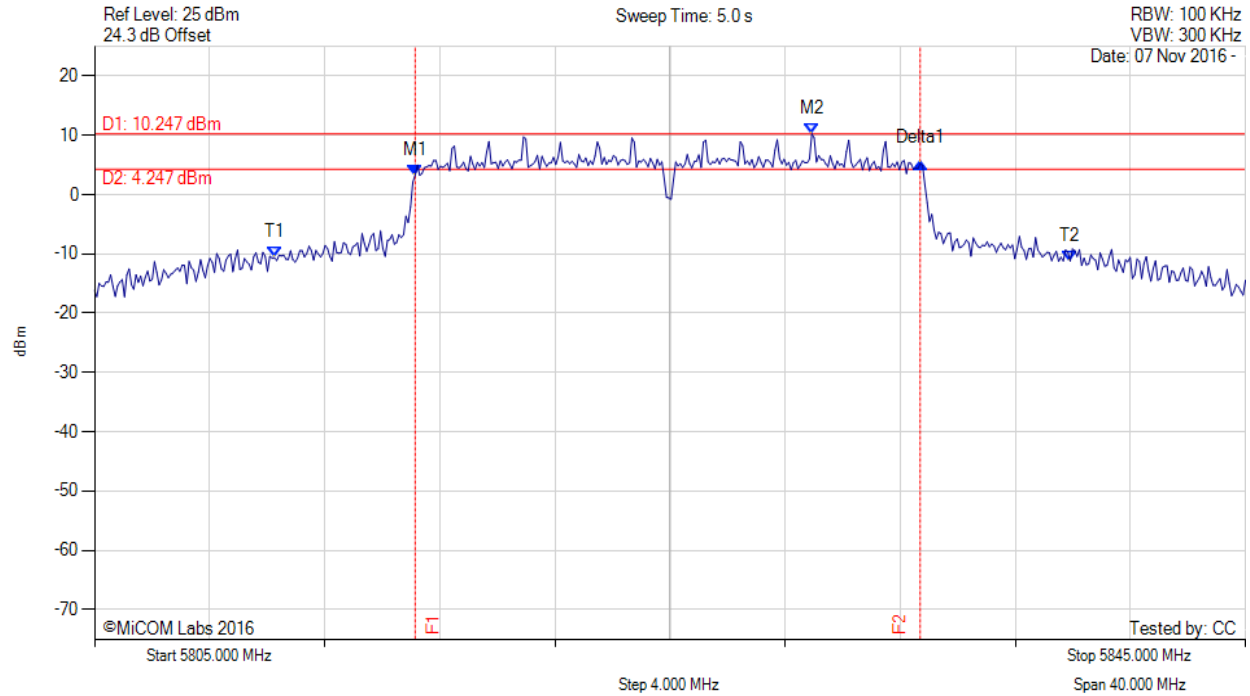

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5816.142 MHz : 3.308 dBm M2 : 5829.930 MHz : 10.247 dBm Delta1 : 17.555 MHz : 1.930 dB T1 : 5811.253 MHz : -10.631 dBm T2 : 5838.908 MHz : -11.188 dBm OBW : 27.655 MHz	Measured 6 dB Bandwidth: 17.555 MHz Measured 99% Bandwidth: 27.655 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 63 of 122



6 dB & 99% BANDWIDTH


Variant: 802.11n HT-20, Channel: 5825.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

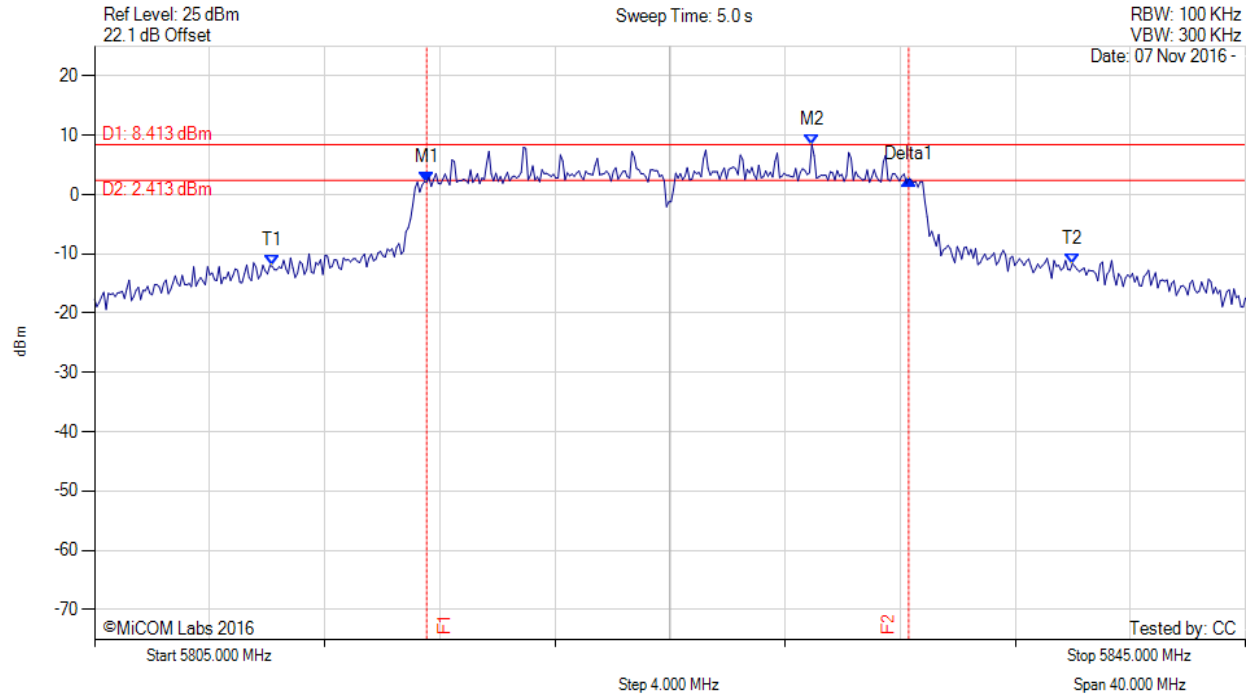

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5816.543 MHz : 2.147 dBm M2 : 5829.930 MHz : 8.413 dBm Delta1 : 16.754 MHz : 0.470 dB T1 : 5811.172 MHz : -12.045 dBm T2 : 5838.988 MHz : -11.642 dBm OBW : 27.816 MHz	Measured 6 dB Bandwidth: 16.754 MHz Measured 99% Bandwidth: 27.816 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

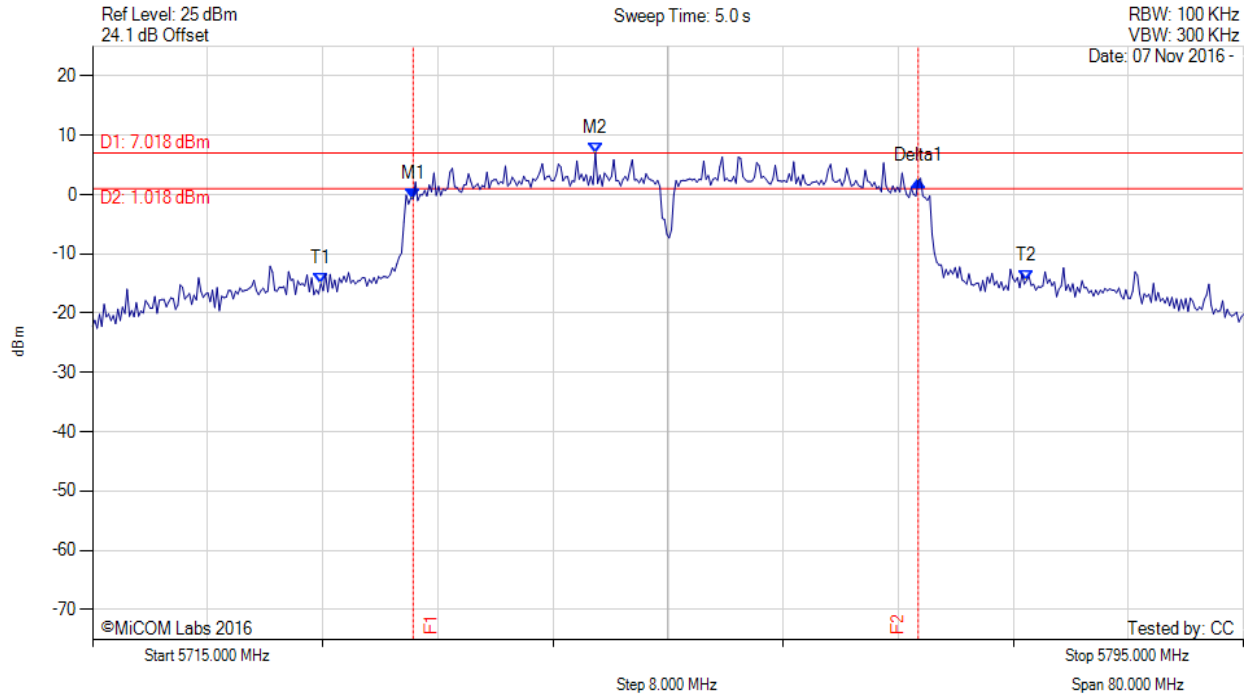

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5737.285 MHz : -0.668 dBm M2 : 5749.950 MHz : 7.018 dBm Delta1 : 35.110 MHz : 3.061 dB T1 : 5730.872 MHz : -15.004 dBm T2 : 5779.930 MHz : -14.449 dBm OBW : 49.058 MHz	Measured 26 dB Bandwidth: 35.110 MHz Measured 99% Bandwidth: 49.058 MHz

[back to matrix](#)




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 65 of 122



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5755.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

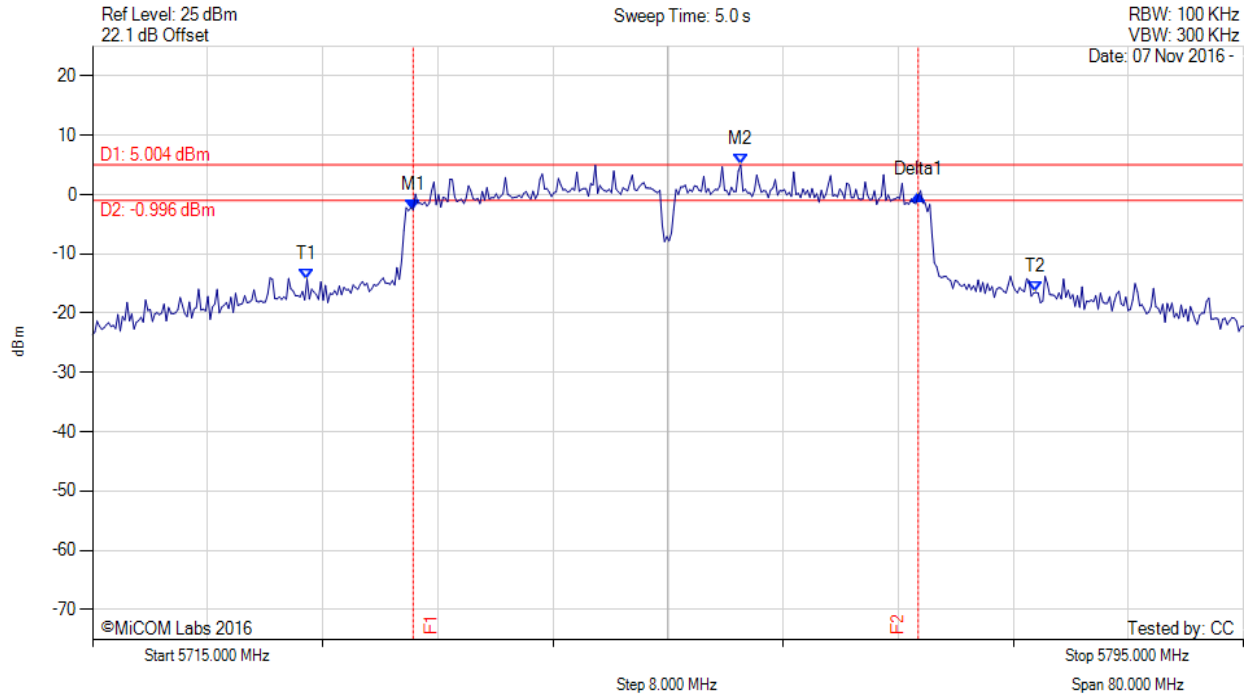

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5737.285 MHz : -2.588 dBm M2 : 5760.050 MHz : 5.004 dBm Delta1 : 35.110 MHz : 2.461 dB T1 : 5729.910 MHz : -14.276 dBm T2 : 5780.571 MHz : -16.456 dBm OBW : 50.661 MHz	Measured 26 dB Bandwidth: 35.110 MHz Measured 99% Bandwidth: 50.661 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 66 of 122



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5795.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

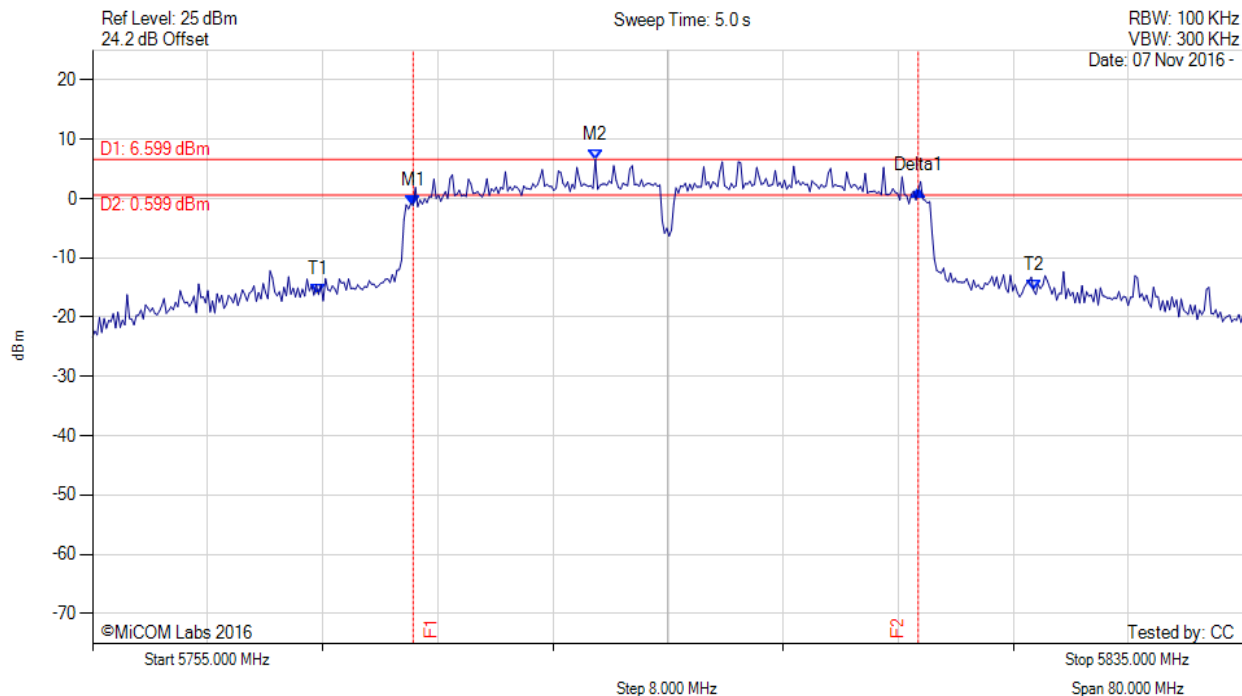

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5777.285 MHz : -1.150 dBm M2 : 5789.950 MHz : 6.599 dBm Delta1 : 35.110 MHz : 2.565 dB T1 : 5770.711 MHz : -16.183 dBm T2 : 5820.411 MHz : -15.488 dBm OBW : 49.699 MHz	Measured 26 dB Bandwidth: 35.110 MHz Measured 99% Bandwidth: 49.699 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 67 of 122



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5795.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

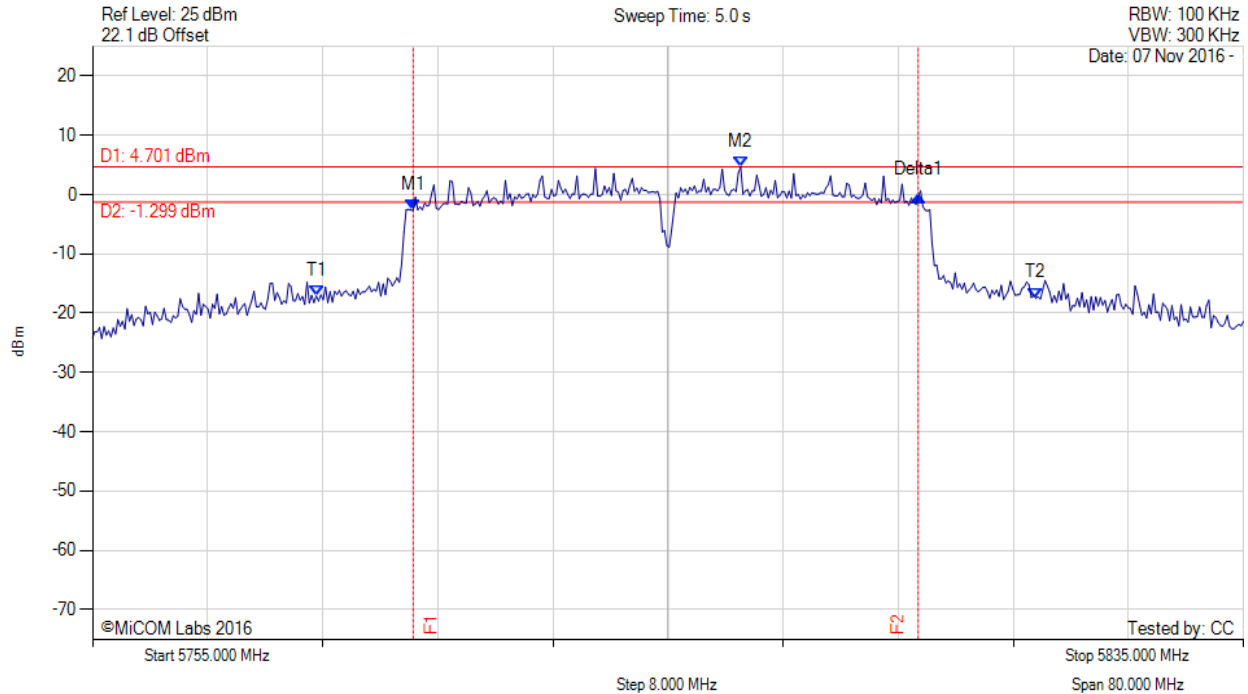

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5777.285 MHz : -2.673 dBm M2 : 5800.050 MHz : 4.701 dBm Delta1 : 35.110 MHz : 2.534 dB T1 : 5770.551 MHz : -17.107 dBm T2 : 5820.571 MHz : -17.438 dBm OBW : 50.020 MHz	Measured 26 dB Bandwidth: 35.110 MHz Measured 99% Bandwidth: 50.020 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 68 of 122

A.3. Power Spectral Density



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5180.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

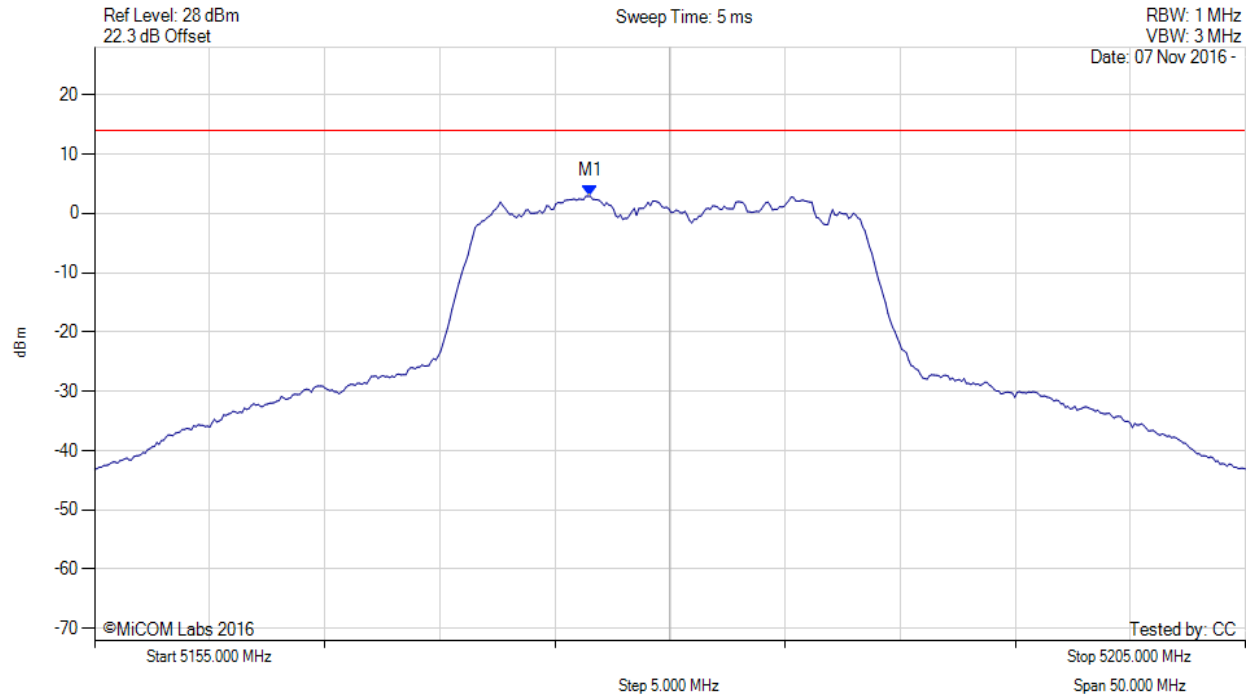

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5176.543 MHz : 2.905 dBm	Limit: ≤ 13.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 69 of 122



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5180.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

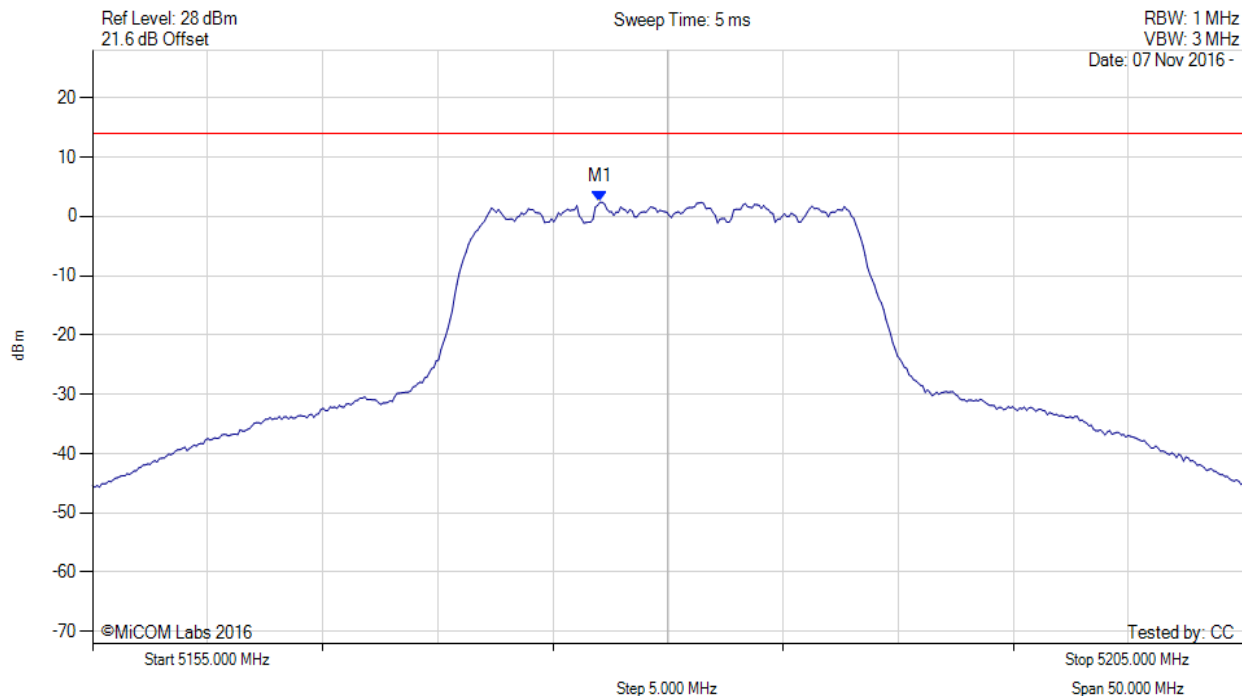

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5177.044 MHz : 2.402 dBm	Limit: ≤ 13.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 70 of 122



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5180.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

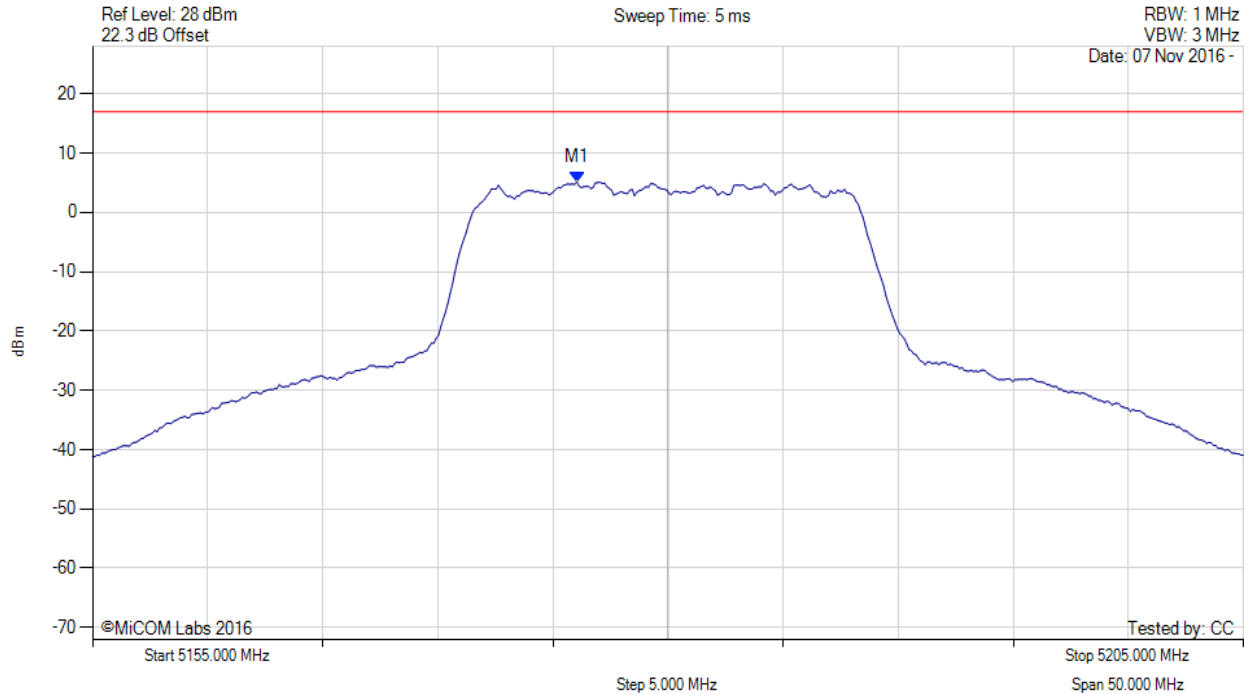

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5176.000 MHz : 5.140 dBm M1 + DCCF : 5176.000 MHz : 5.184 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 17.0 dBm Margin: -11.8 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 71 of 122



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5200.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

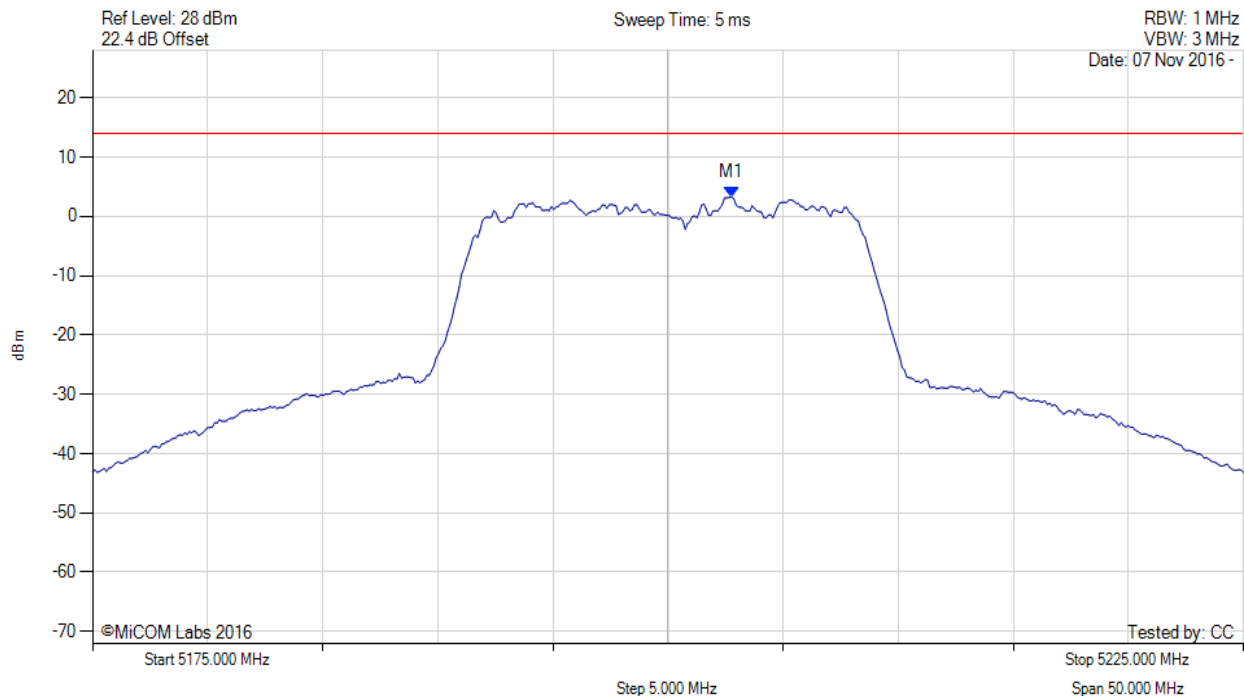

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5202.756 MHz : 3.237 dBm	Limit: ≤ 13.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 72 of 122



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5200.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

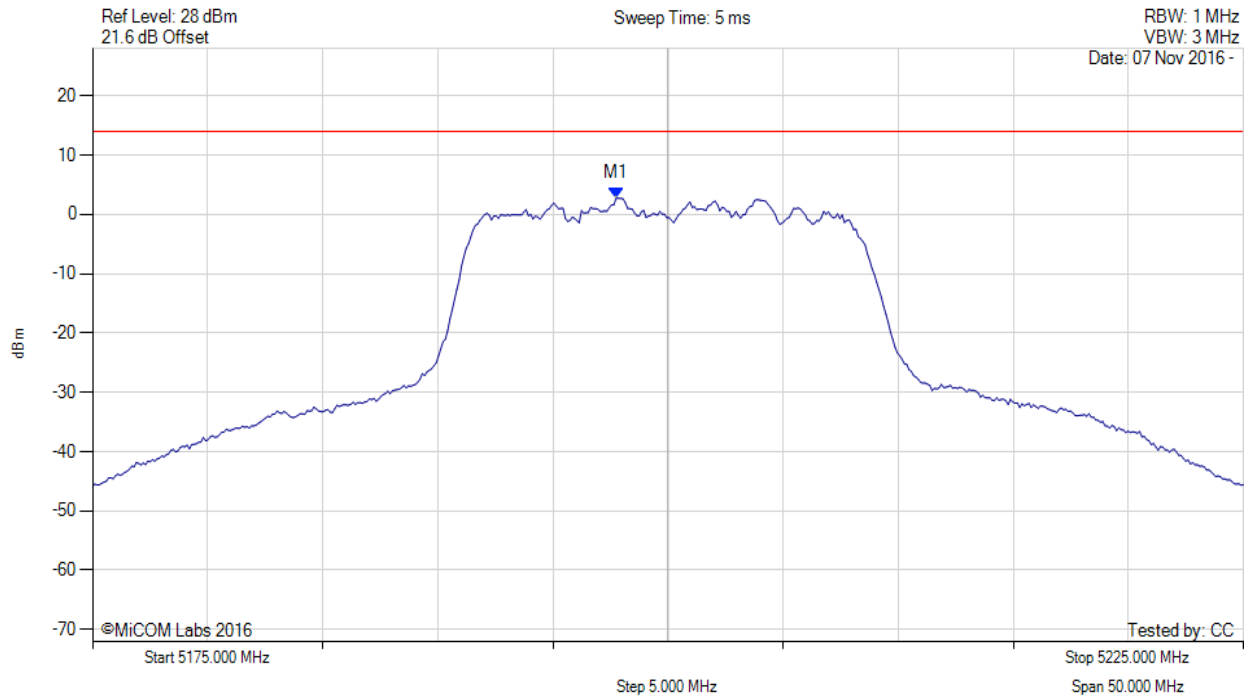

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5197.745 MHz : 2.723 dBm	Channel Frequency: 5200.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 73 of 122



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5200.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

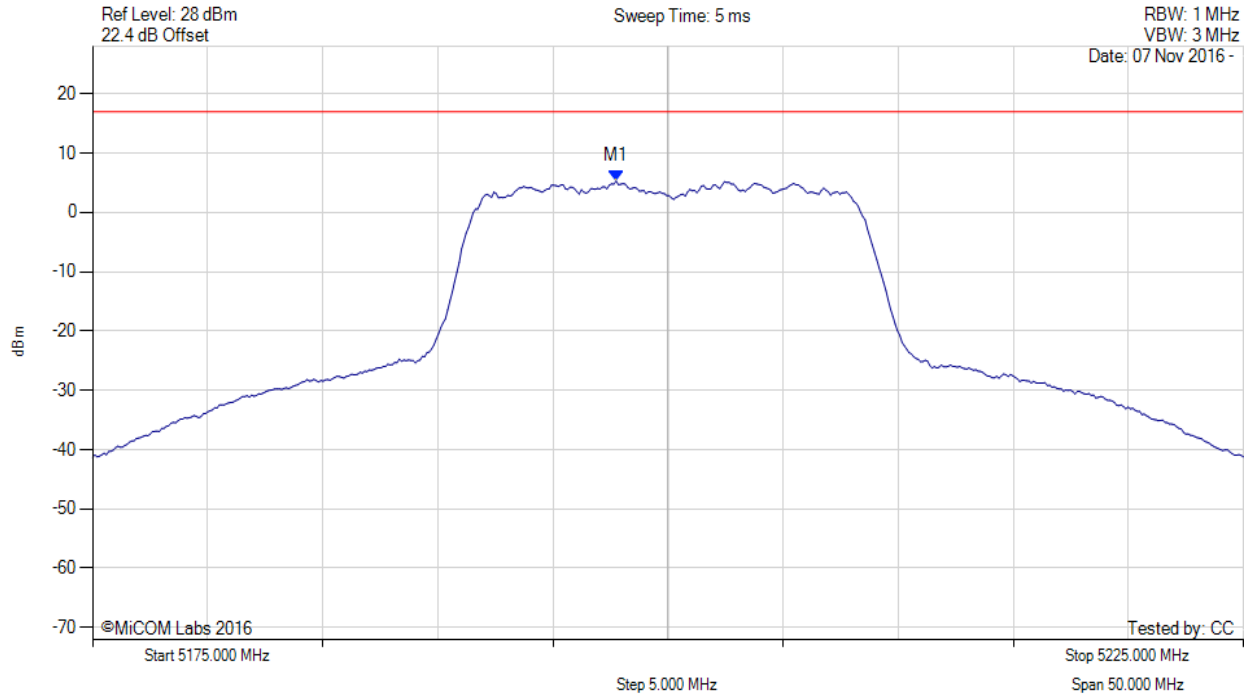

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5197.700 MHz : 5.290 dBm M1 + DCCF : 5197.700 MHz : 5.334 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 17.0 dBm Margin: -11.7 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 74 of 122



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5240.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

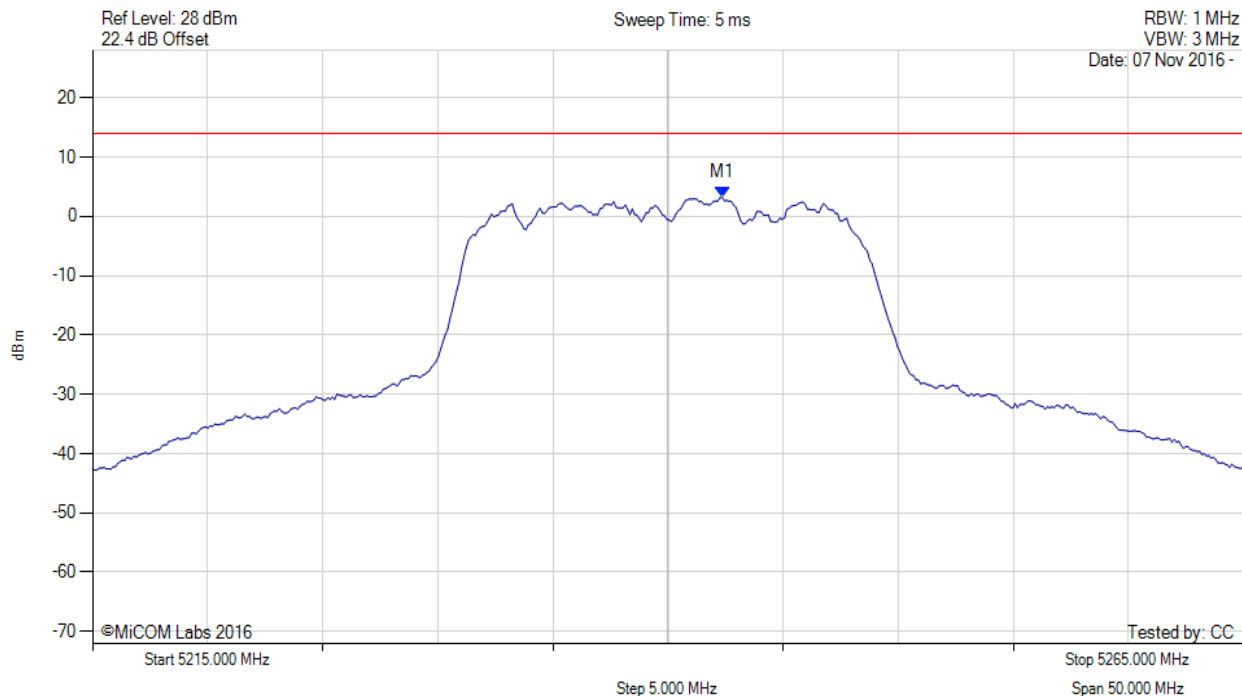

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5242.355 MHz : 3.203 dBm	Limit: ≤ 13.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 75 of 122



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5240.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

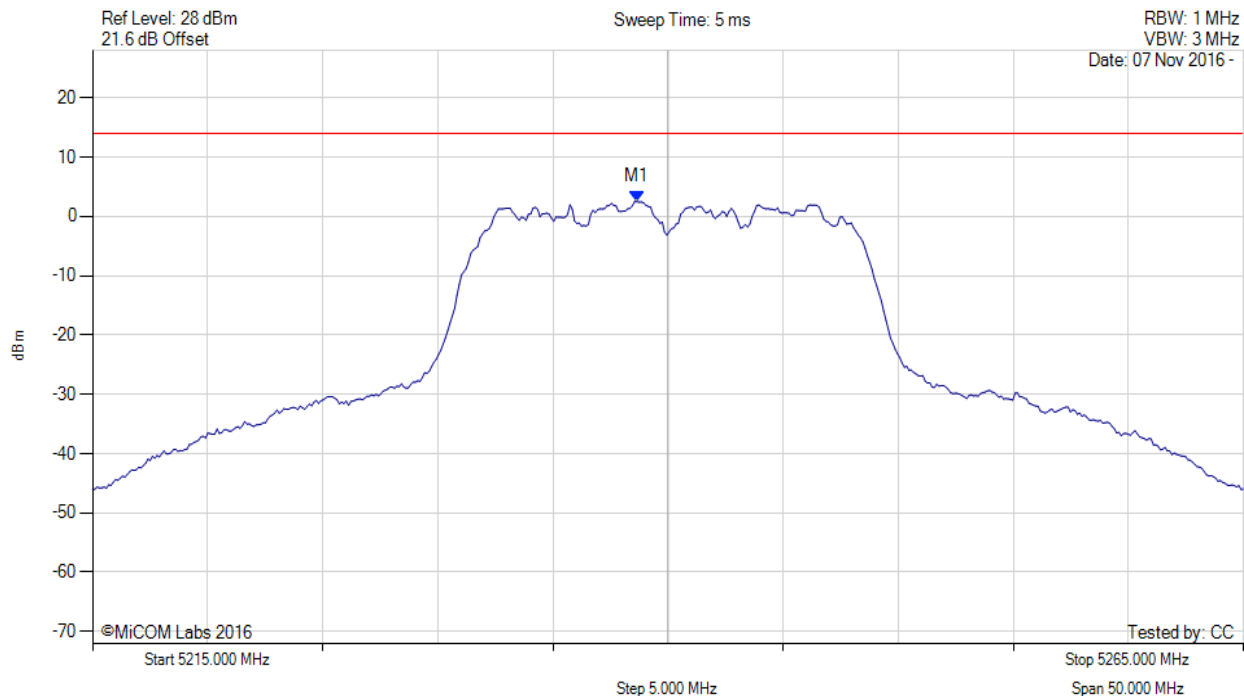

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5238.647 MHz : 2.508 dBm	Limit: ≤ 13.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 76 of 122



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5240.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

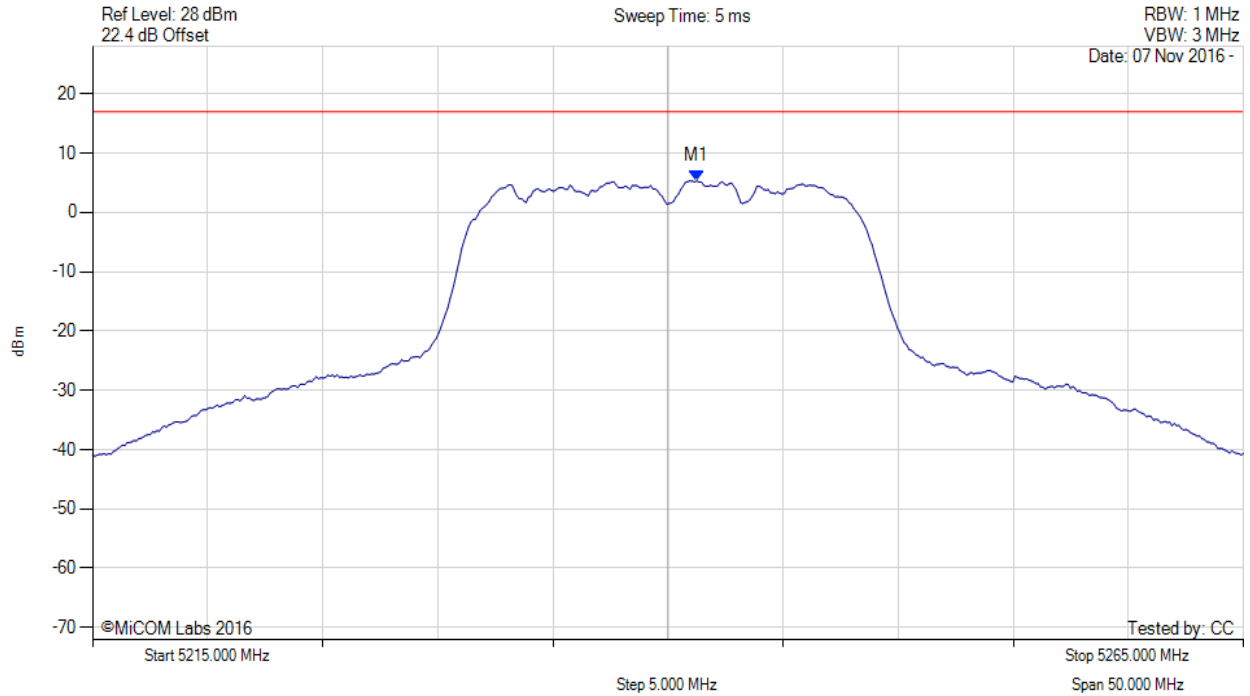

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5241.300 MHz : 5.323 dBm M1 + DCCF : 5241.300 MHz : 5.367 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 17.0 dBm Margin: -11.6 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 77 of 122



POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5210.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

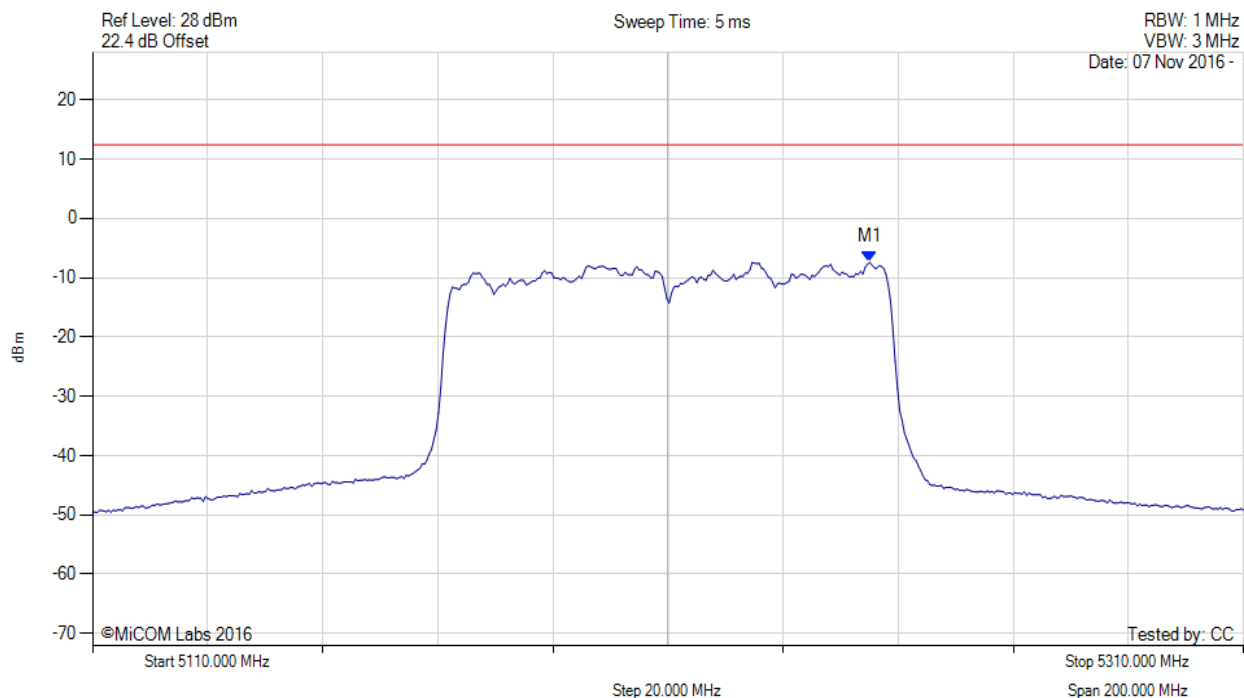

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5245.070 MHz : -7.414 dBm	Limit: ≤ 12.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 78 of 122



POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5210.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

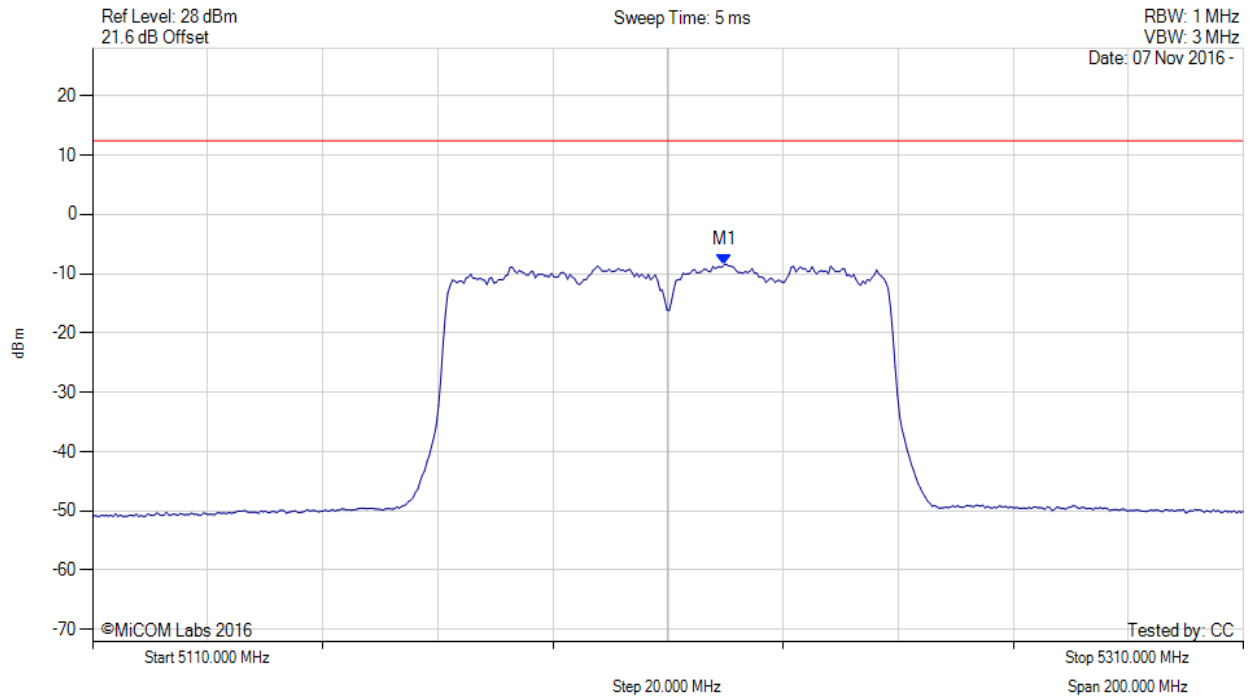

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5219.820 MHz : -8.428 dBm	Limit: ≤ 12.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 79 of 122



POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5210.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

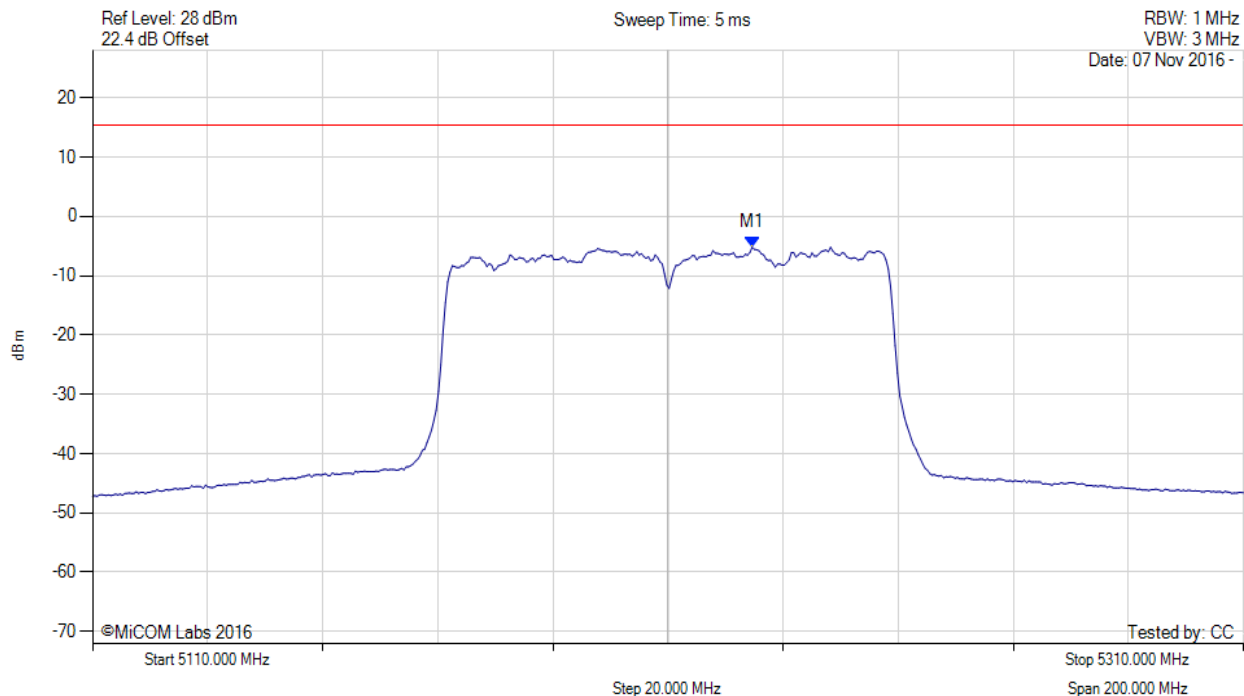

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5224.600 MHz : -5.185 dBm M1 + DCCF : 5224.600 MHz : -5.141 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 15.4 dBm Margin: -20.6 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 80 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5180.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

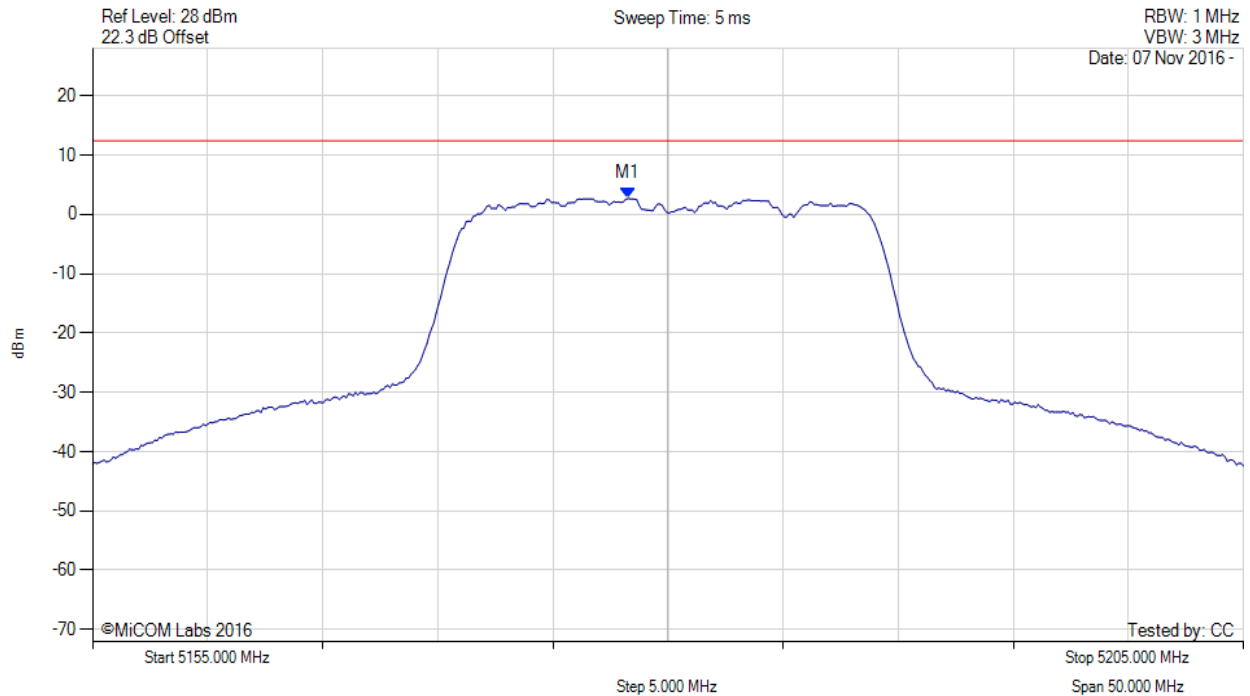

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5178.246 MHz : 2.664 dBm	Limit: ≤ 12.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 81 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5180.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

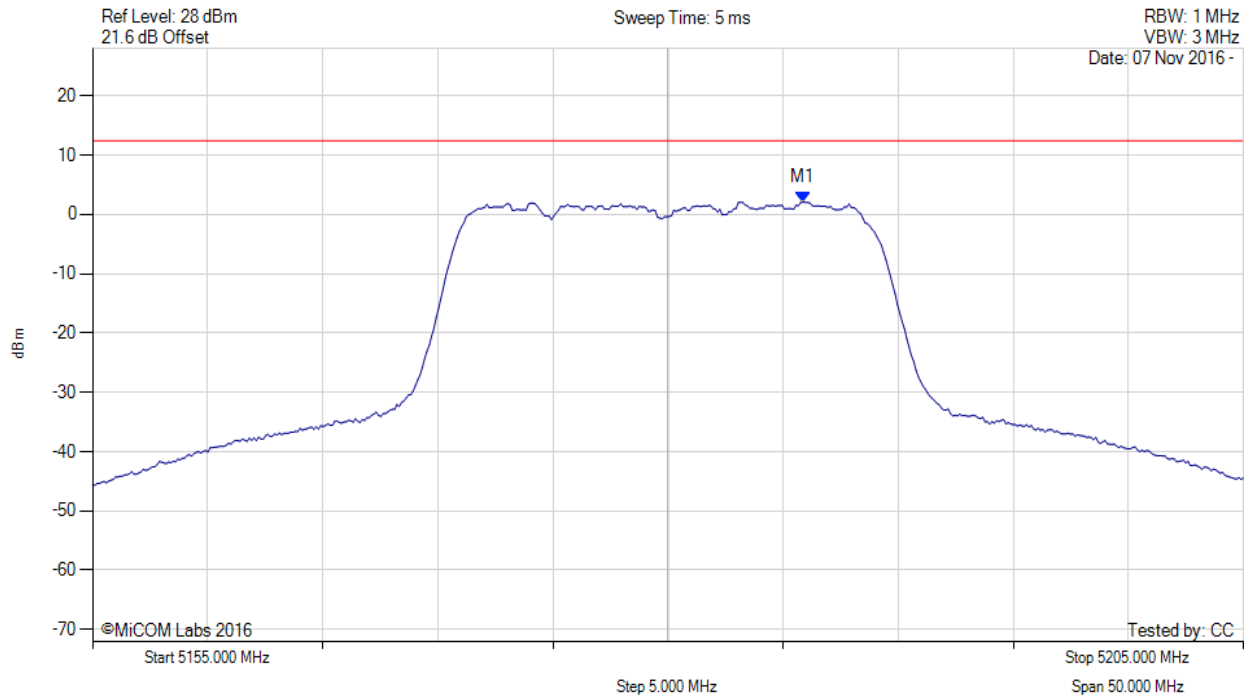

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5185.862 MHz : 2.061 dBm	Limit: ≤ 12.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 82 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5180.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

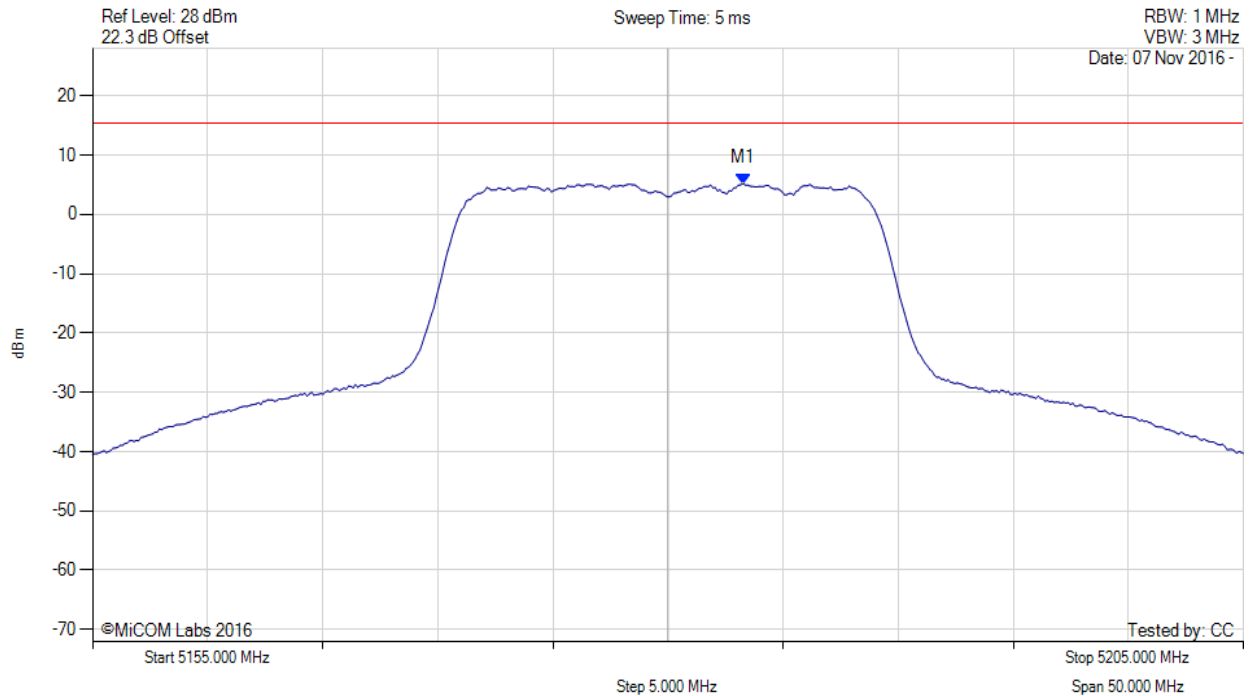

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5183.300 MHz : 5.196 dBm M1 + DCCF : 5183.300 MHz : 5.240 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 15.4 dBm Margin: -10.2 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 83 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5200.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

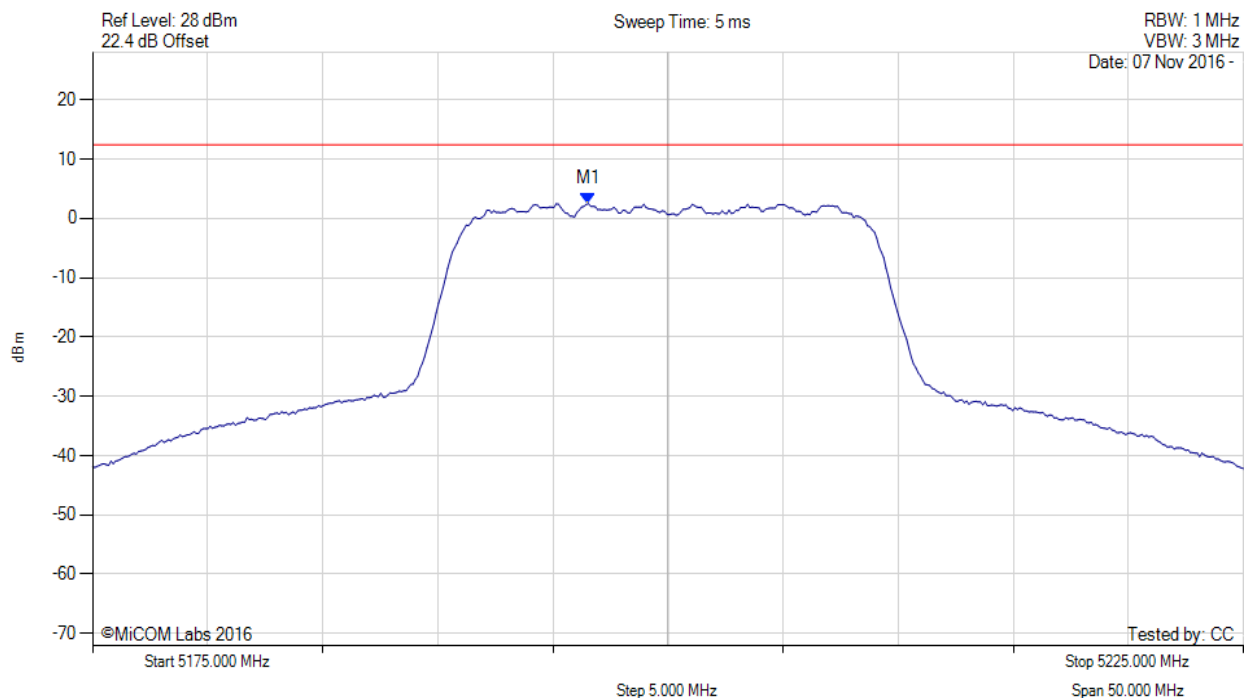

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5196.543 MHz : 2.490 dBm	Limit: ≤ 12.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 84 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5200.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

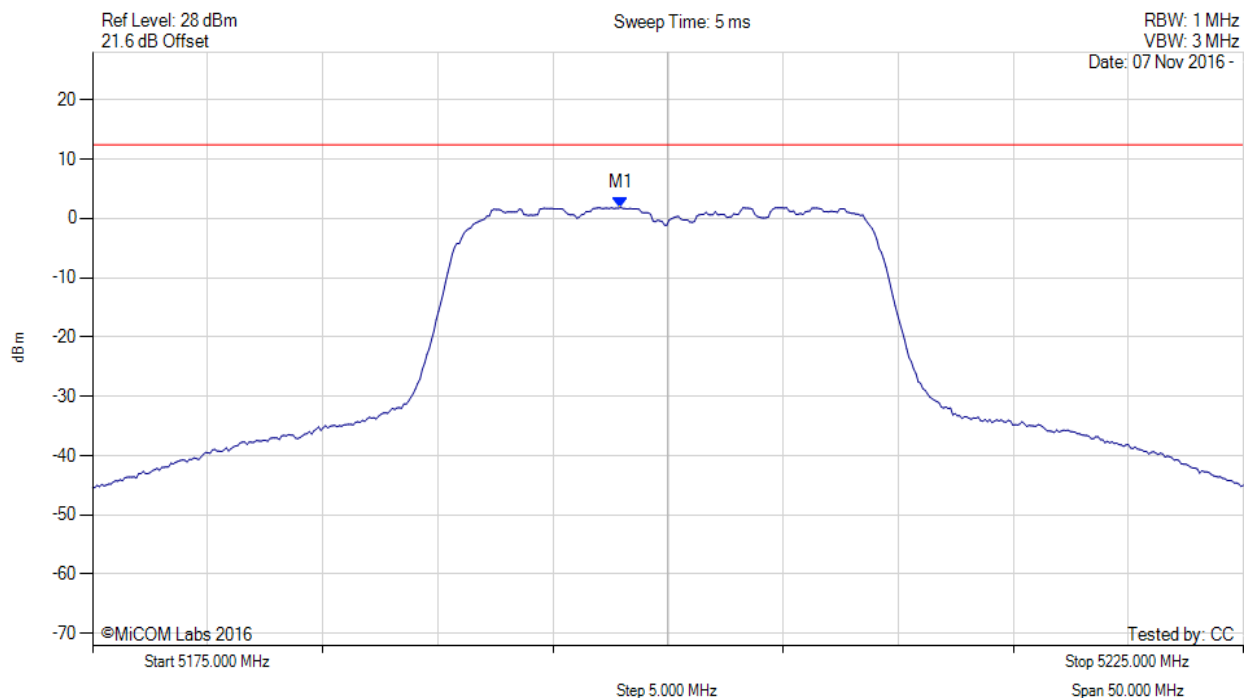

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5197.946 MHz : 1.832 dBm	Channel Frequency: 5200.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 85 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5200.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

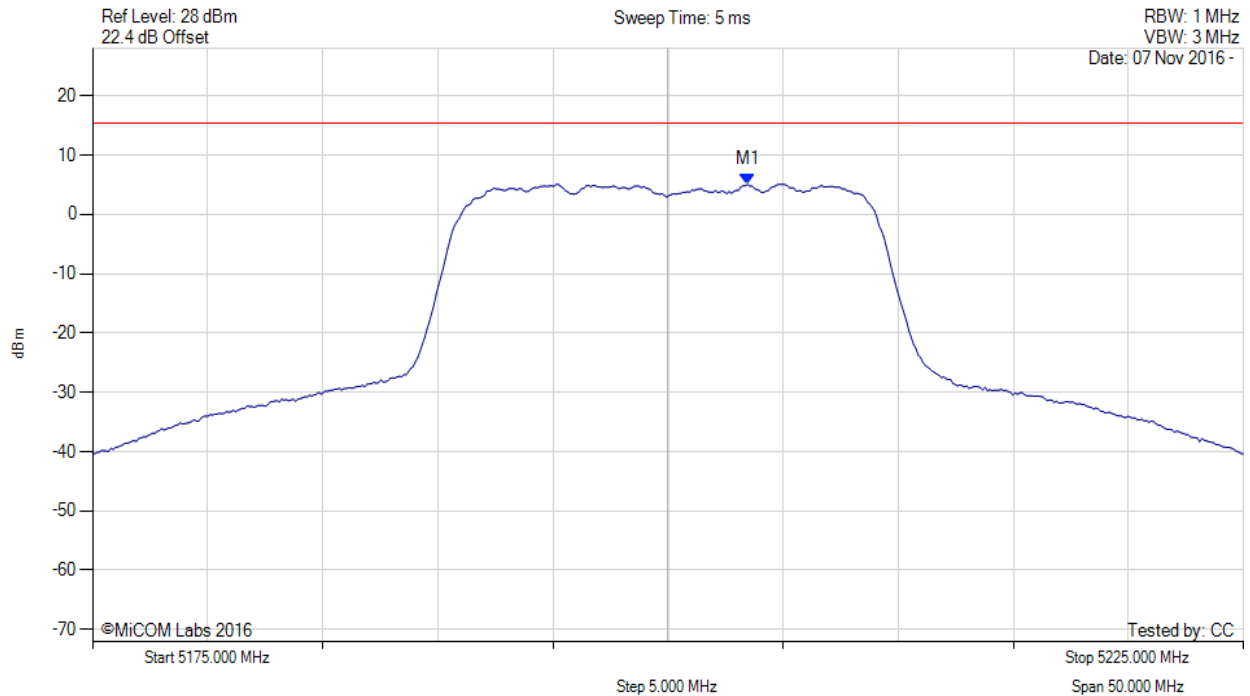

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5203.500 MHz : 5.081 dBm M1 + DCCF : 5203.500 MHz : 5.125 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 15.4 dBm Margin: -10.3 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 86 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5240.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

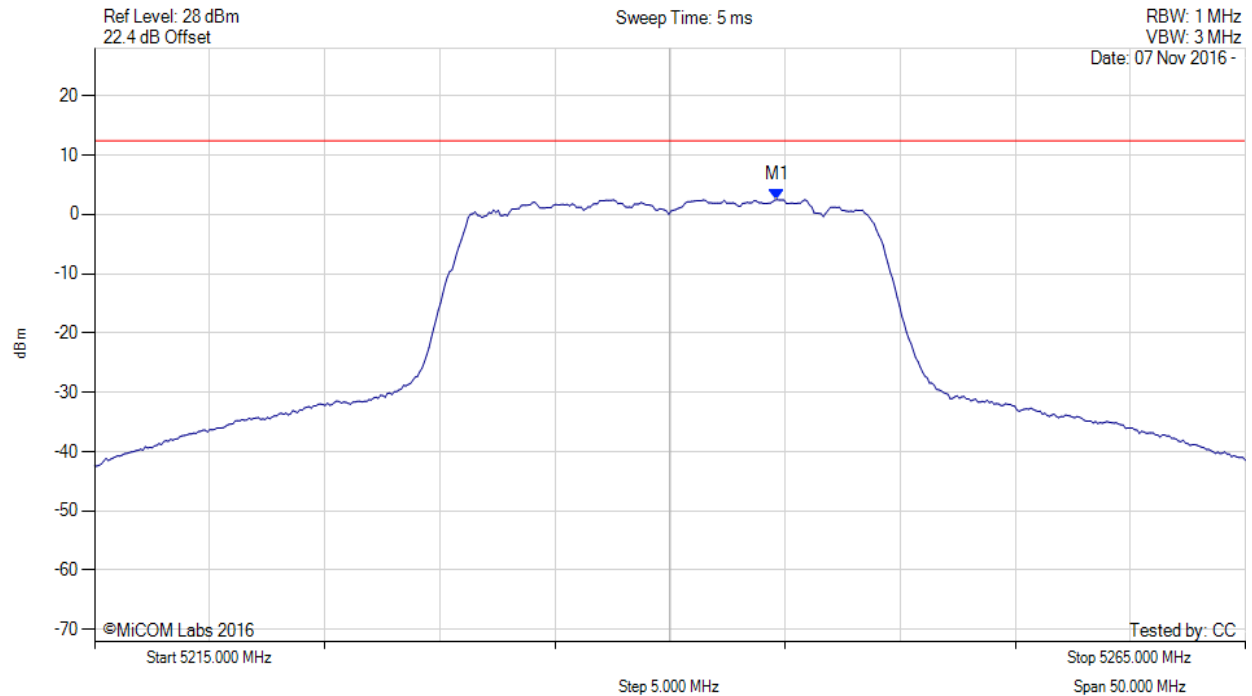

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5244.659 MHz : 2.489 dBm	Limit: ≤ 12.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 87 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5240.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

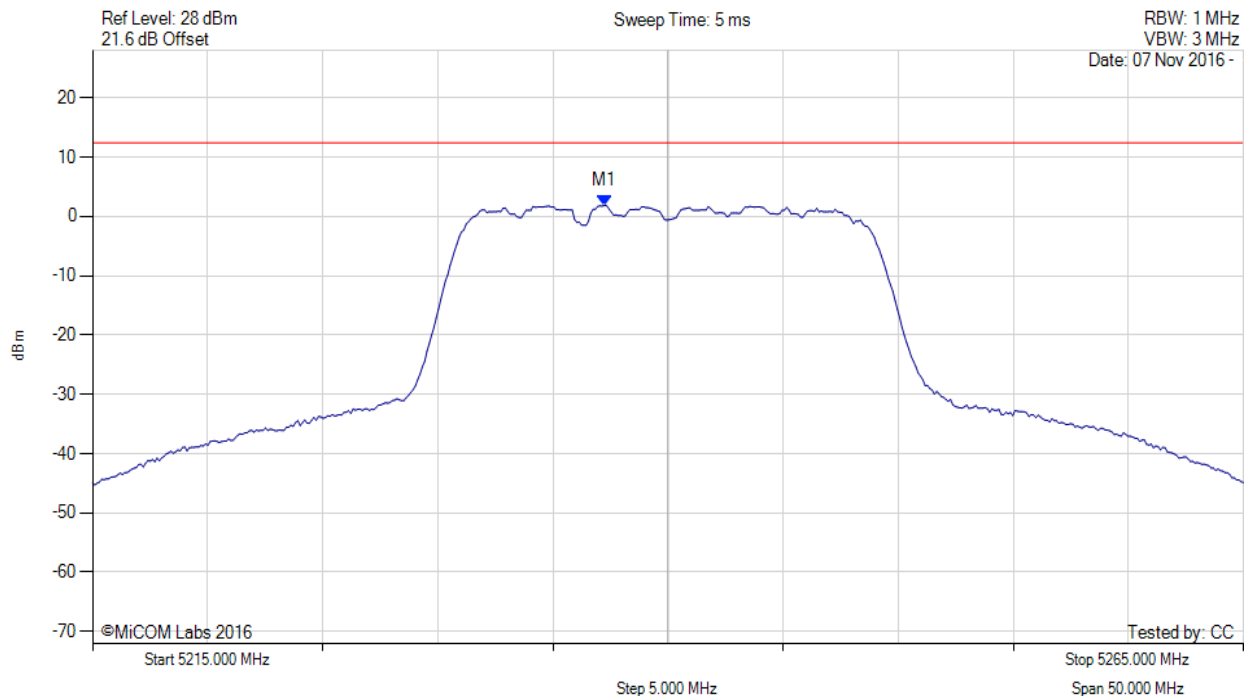

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5237.244 MHz : 1.863 dBm	Limit: ≤ 12.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 88 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5240.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

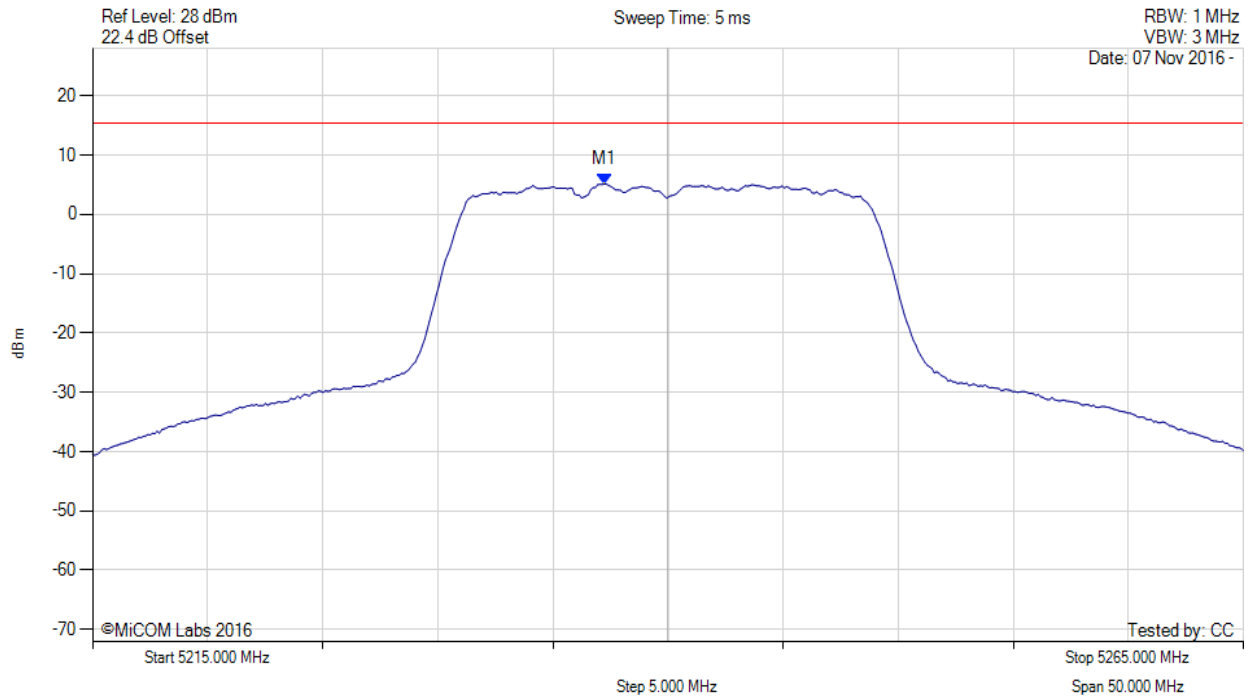

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5237.200 MHz : 5.148 dBm M1 + DCCF : 5237.200 MHz : 5.192 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 15.4 dBm Margin: -10.2 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 89 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5190.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

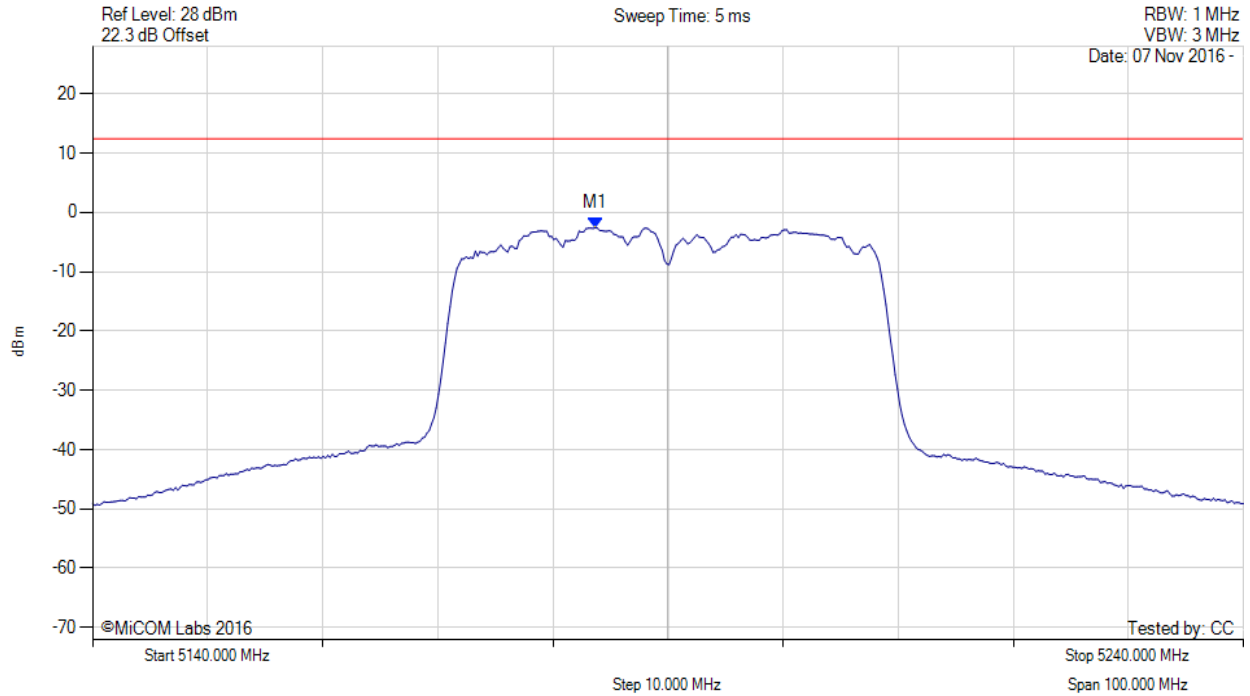

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5183.687 MHz : -2.600 dBm	Limit: ≤ 12.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 90 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5190.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

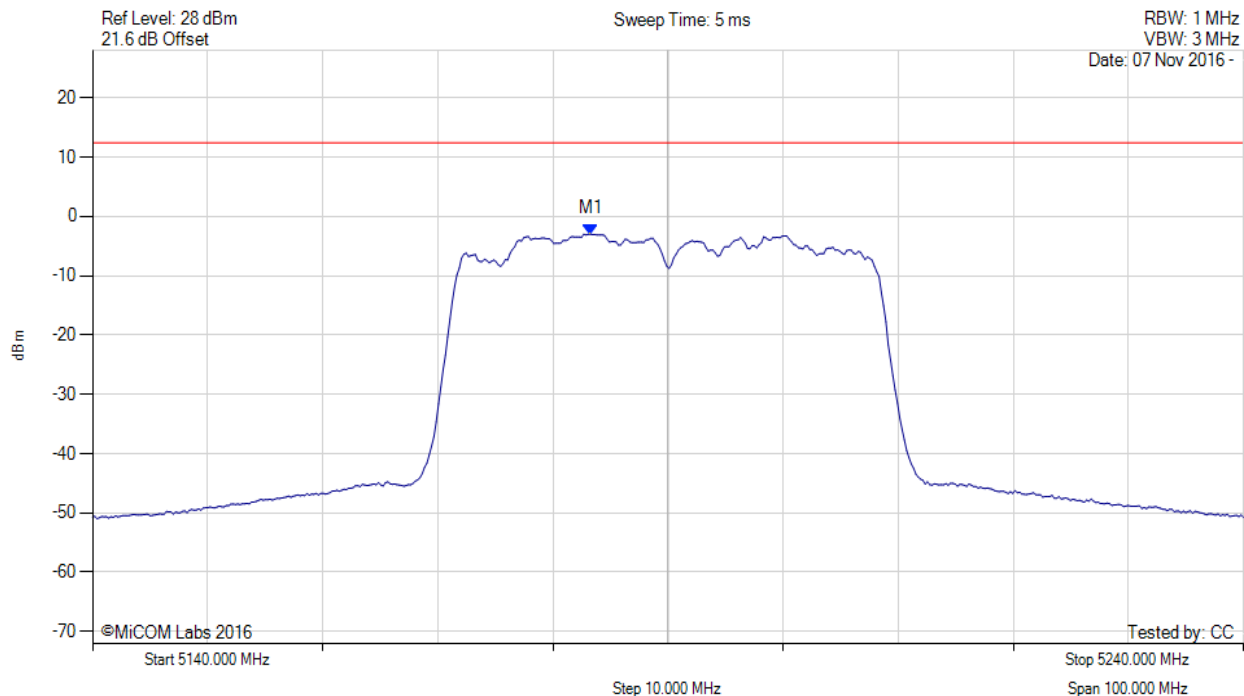

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5183.287 MHz : -2.988 dBm	Limit: ≤ 12.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 91 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5190.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

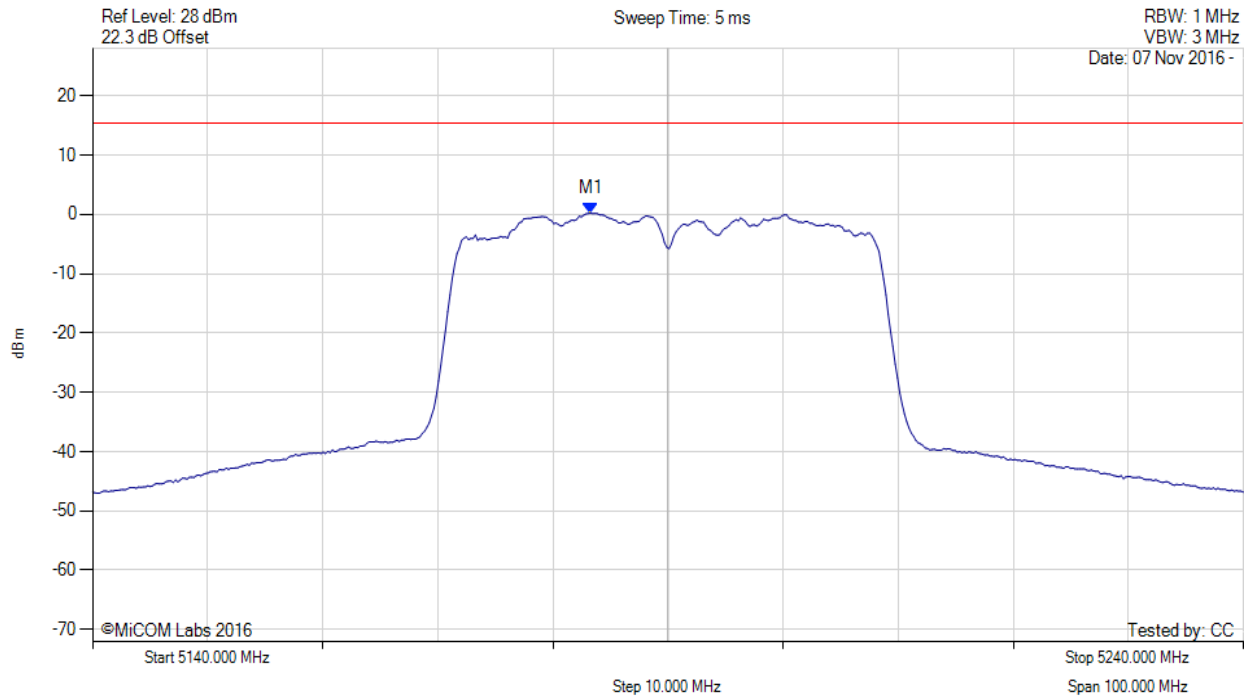

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5183.300 MHz : 0.194 dBm M1 + DCCF : 5183.300 MHz : 0.238 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 15.4 dBm Margin: -15.2 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 92 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5230.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

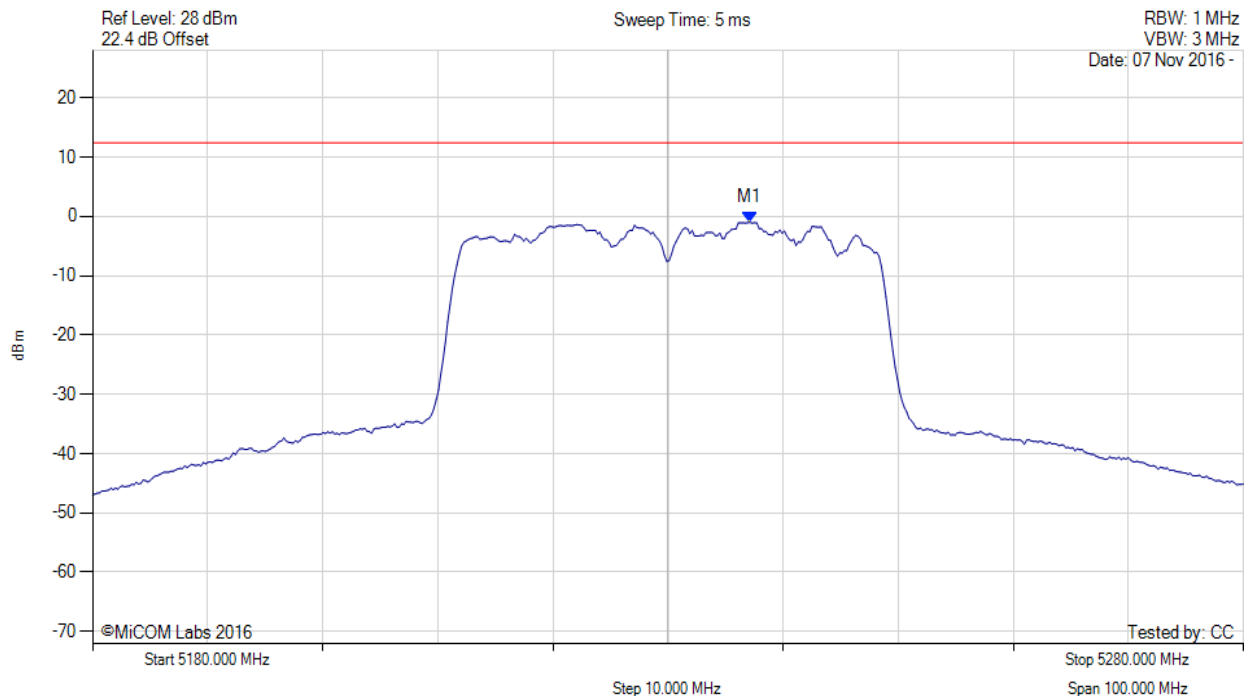

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5237.114 MHz : -0.980 dBm	Limit: ≤ 12.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 93 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5230.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

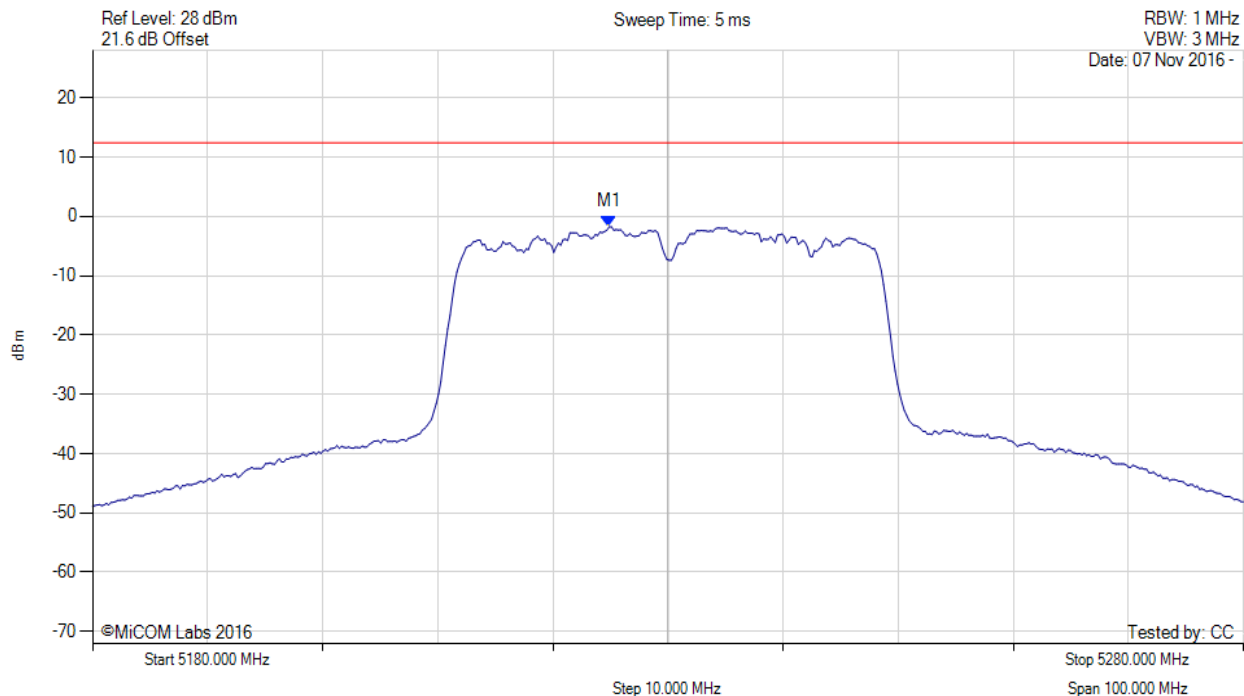

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5224.890 MHz : -1.761 dBm	Limit: ≤ 12.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 94 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5230.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

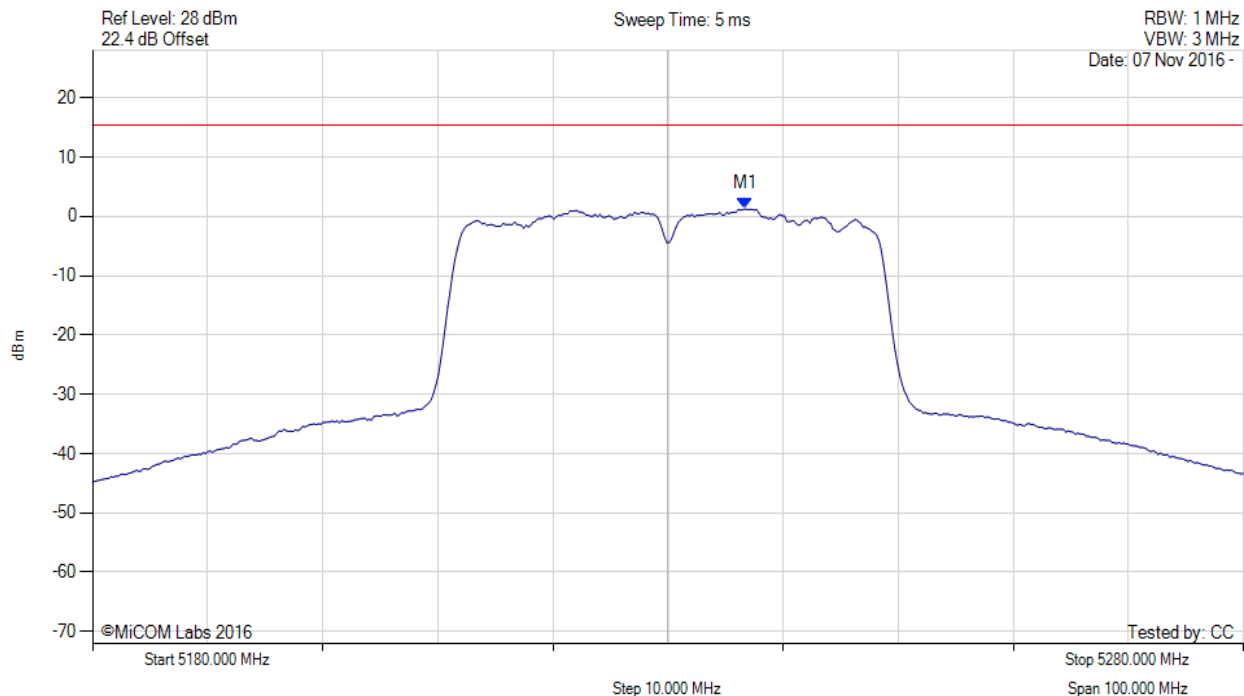

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5236.700 MHz : 1.270 dBm M1 + DCCF : 5236.700 MHz : 1.314 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 15.4 dBm Margin: -14.1 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 95 of 122



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5745.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

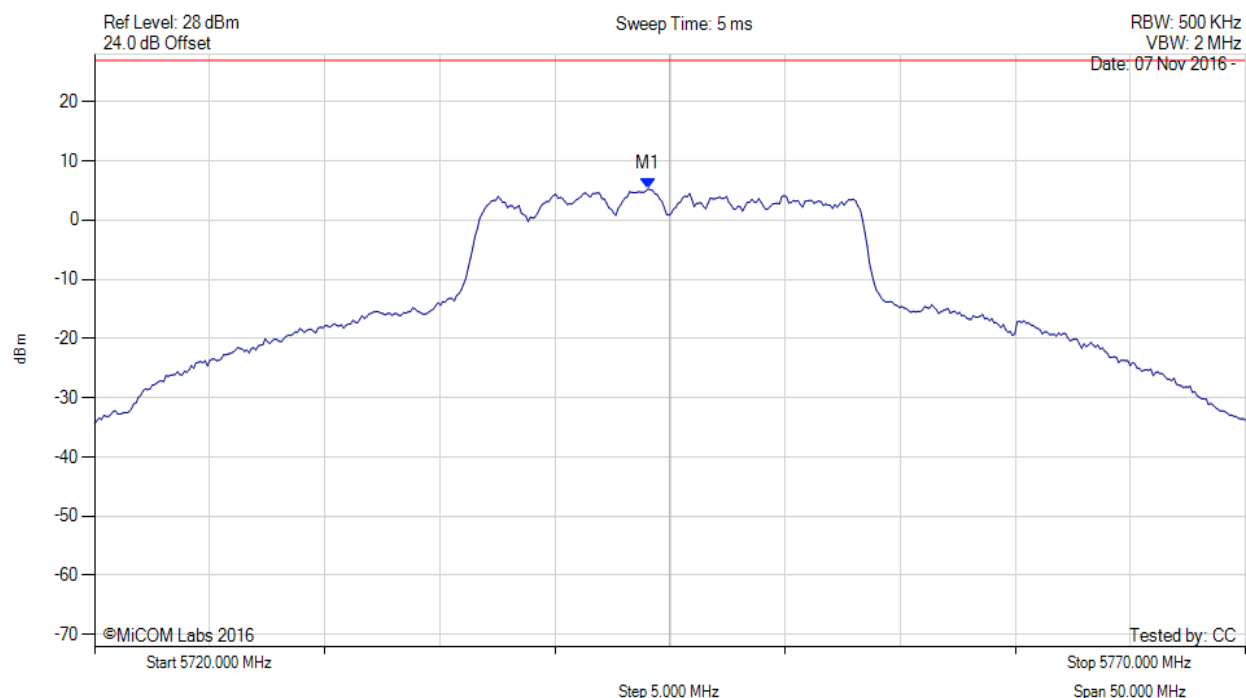

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5744.048 MHz : 5.285 dBm	Limit: ≤ 26.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 96 of 122



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5745.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

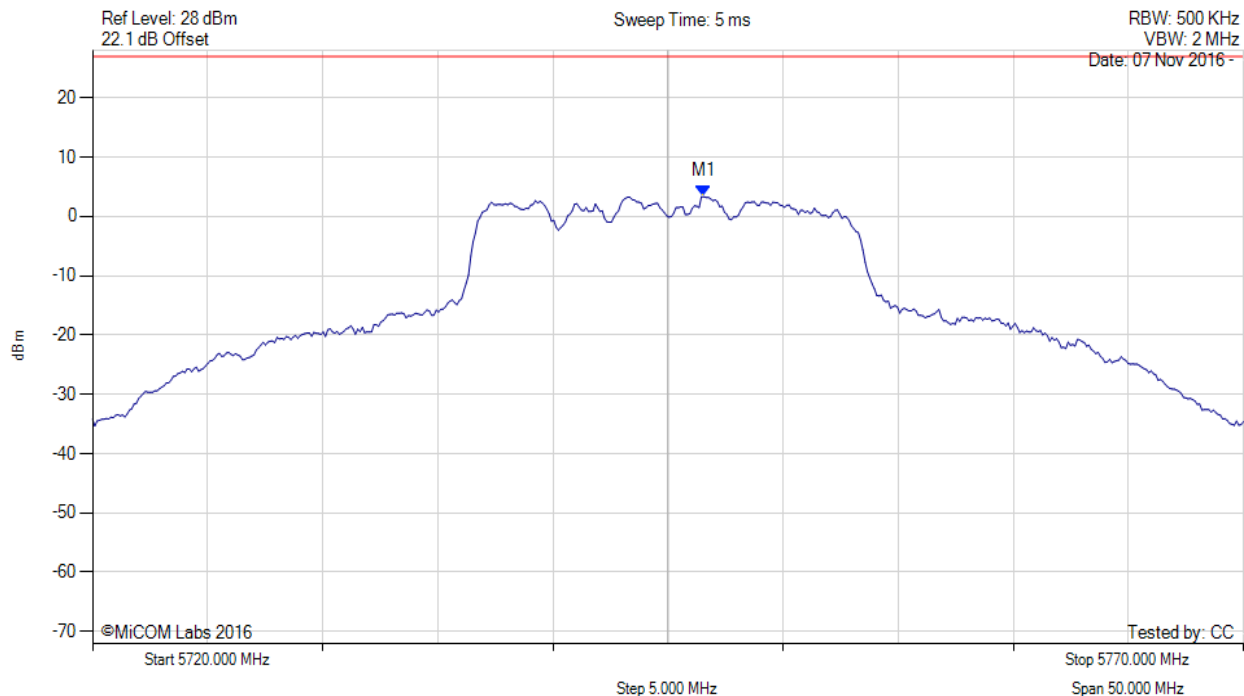

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5746.553 MHz : 3.337 dBm	Limit: ≤ 26.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 97 of 122



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5745.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

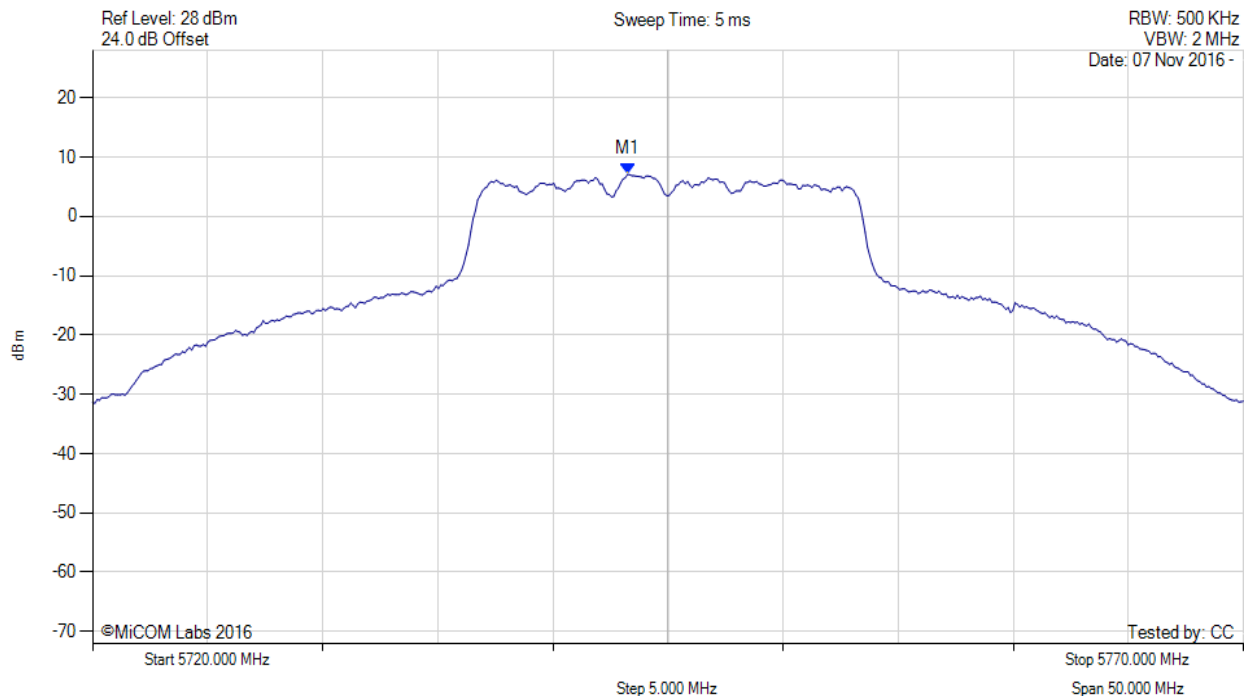

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5743.200 MHz : 7.100 dBm M1 + DCCF : 5743.200 MHz : 7.144 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 30.0 dBm Margin: -22.9 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 98 of 122



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5785.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

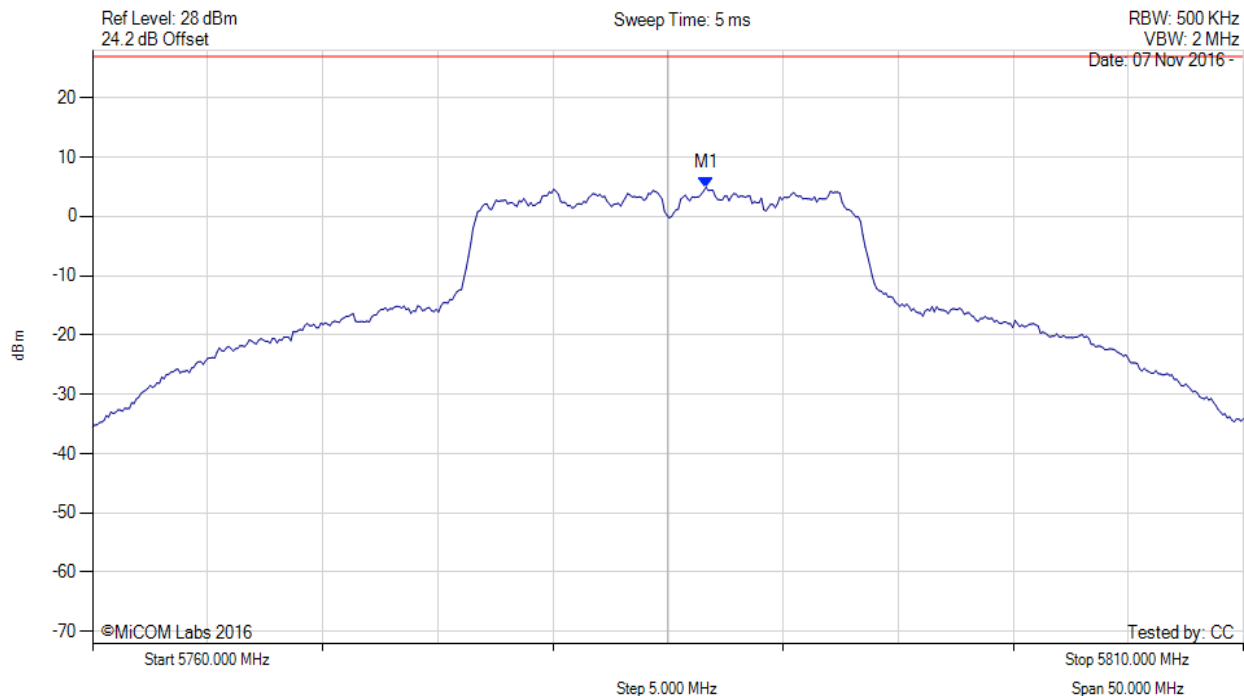

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5786.653 MHz : 4.895 dBm	Limit: ≤ 26.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 99 of 122



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5785.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

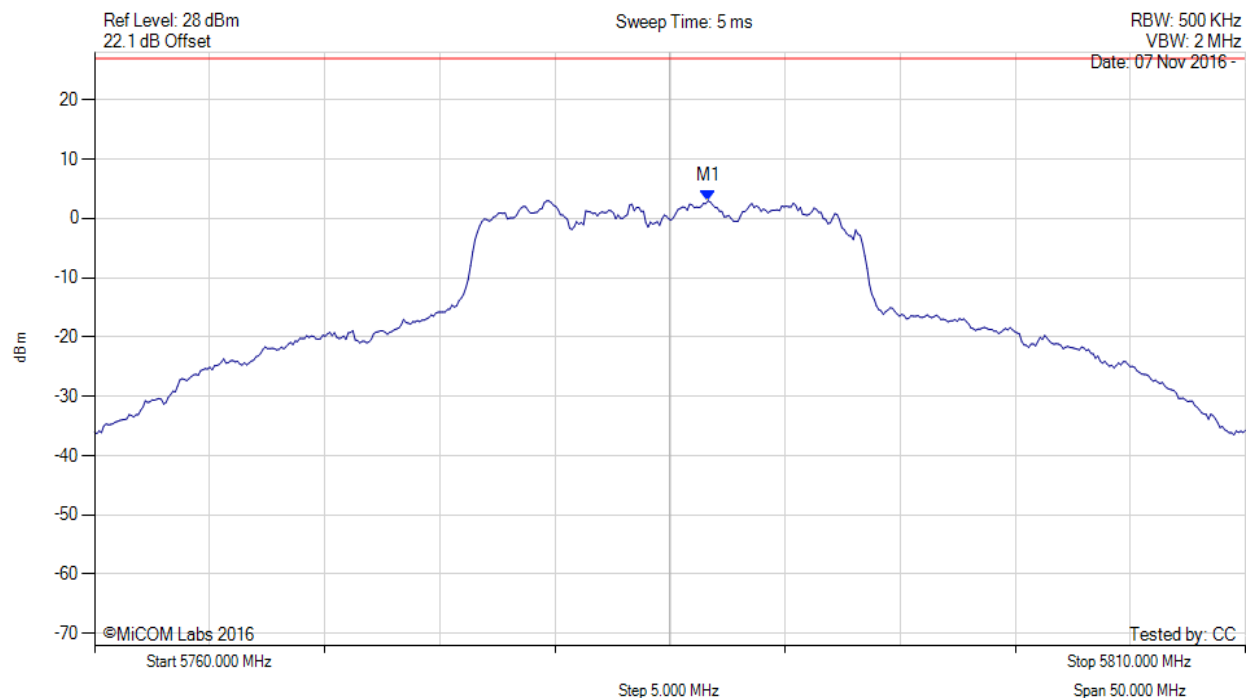

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5786.653 MHz : 2.950 dBm	Channel Frequency: 5785.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 100 of 122



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5785.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

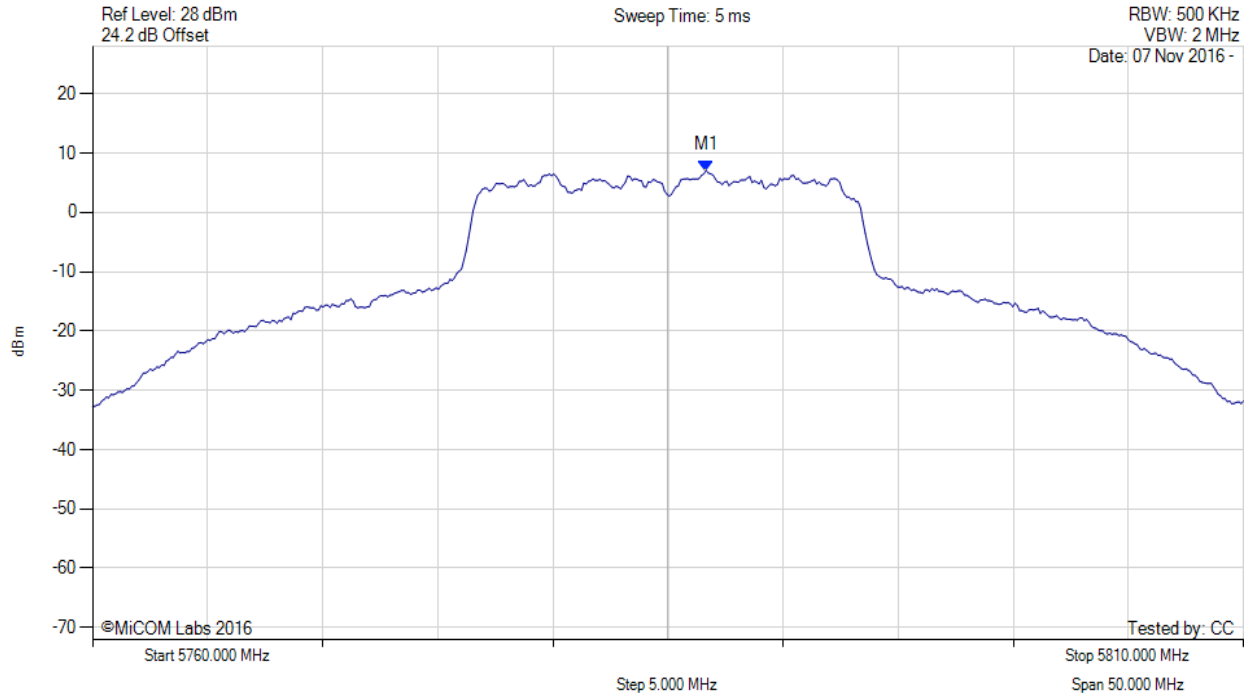

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5786.700 MHz : 7.041 dBm M1 + DCCF : 5786.700 MHz : 7.085 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 30.0 dBm Margin: -22.9 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 101 of 122



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5825.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

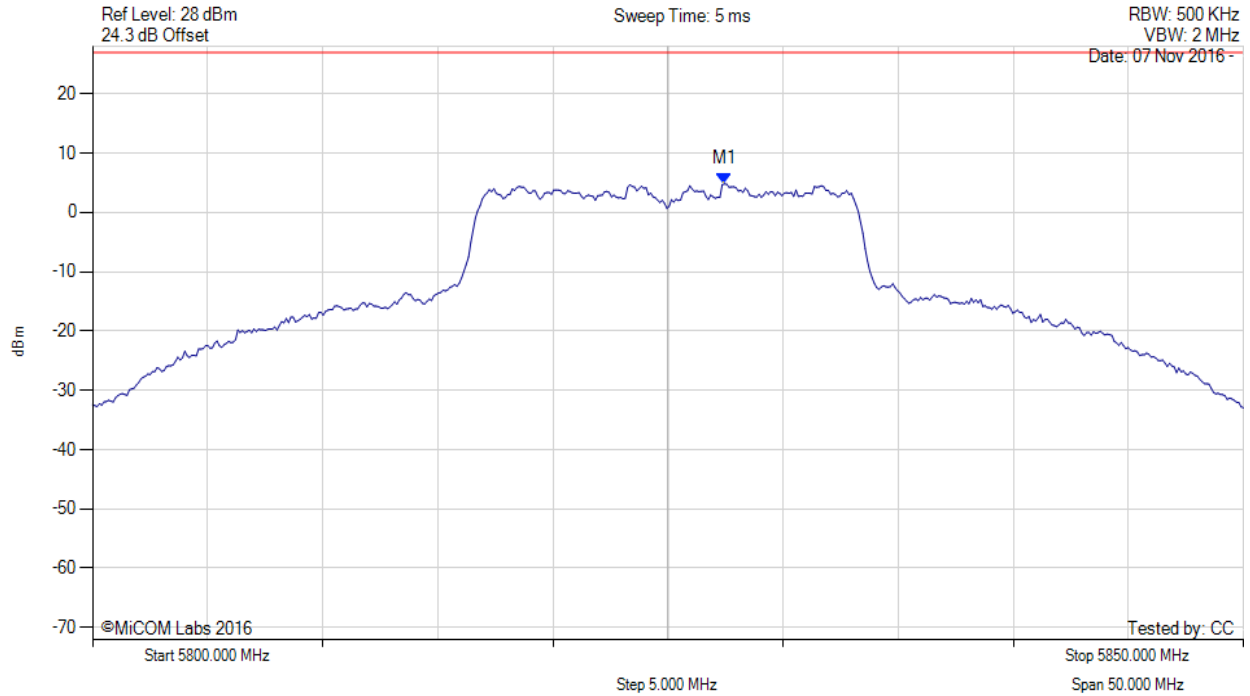

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5827.455 MHz : 4.805 dBm	Limit: ≤ 26.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 102 of 122



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5825.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

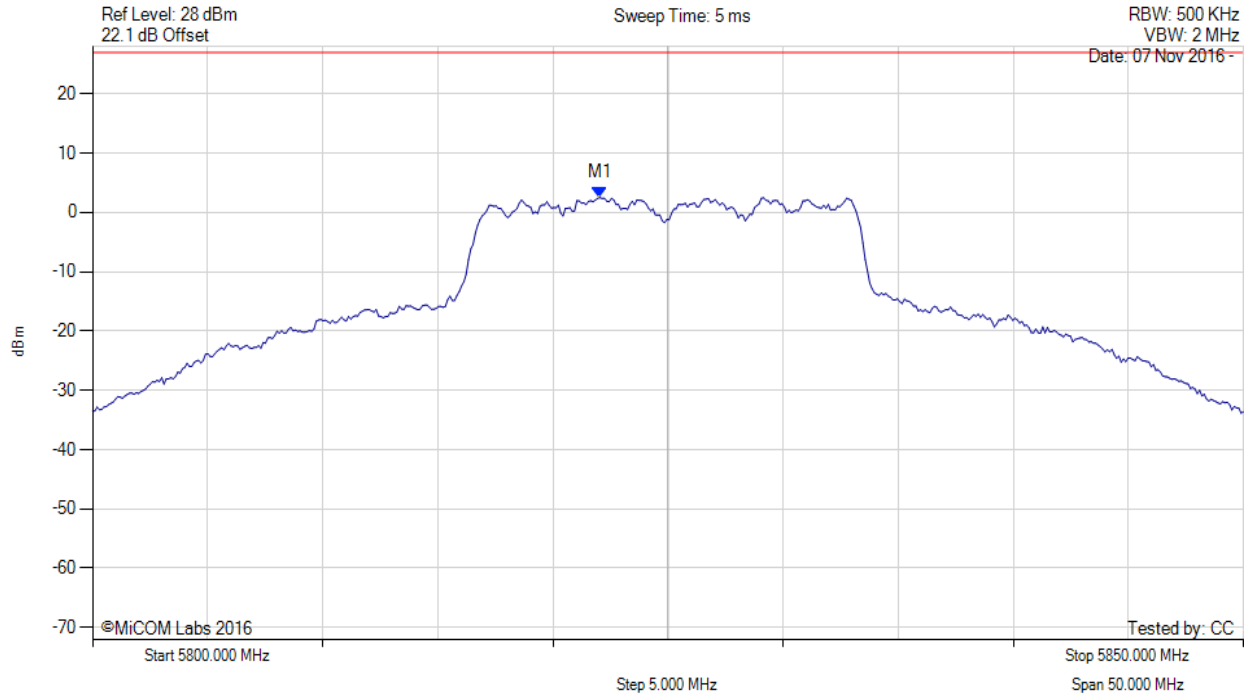

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5822.044 MHz : 2.507 dBm	Limit: ≤ 26.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 103 of 122



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5825.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

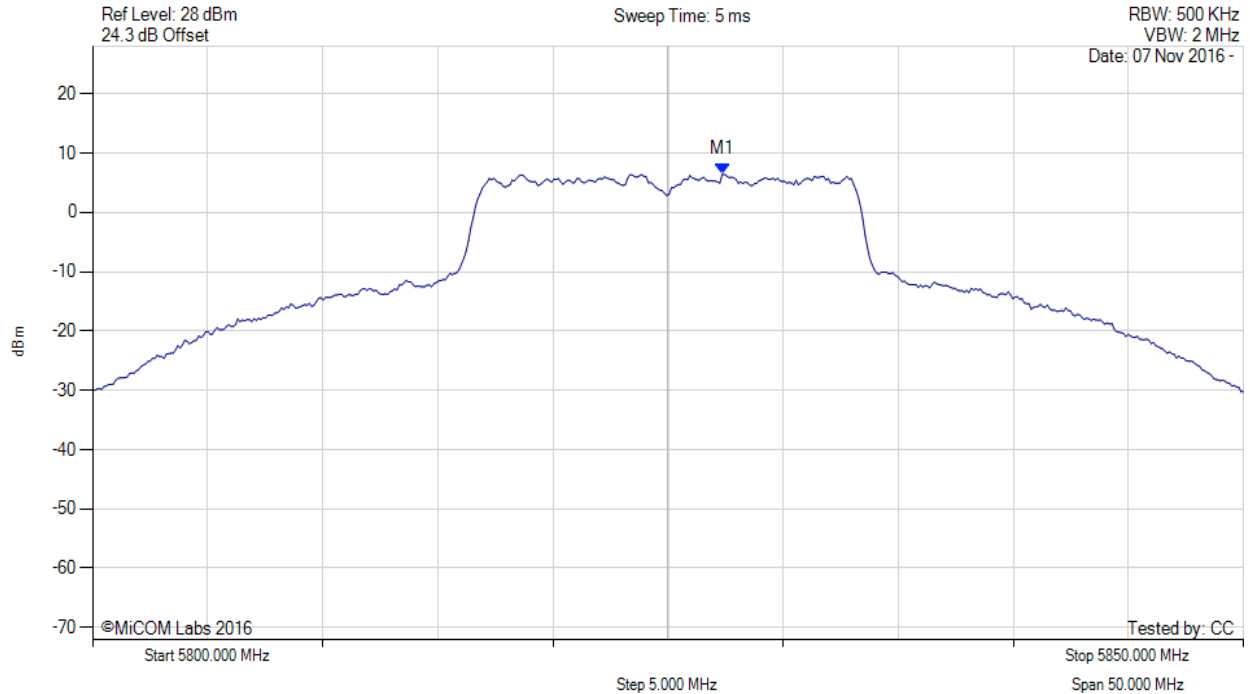

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5827.400 MHz : 6.433 dBm M1 + DCCF : 5827.400 MHz : 6.477 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 30.0 dBm Margin: -23.5 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 104 of 122



POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

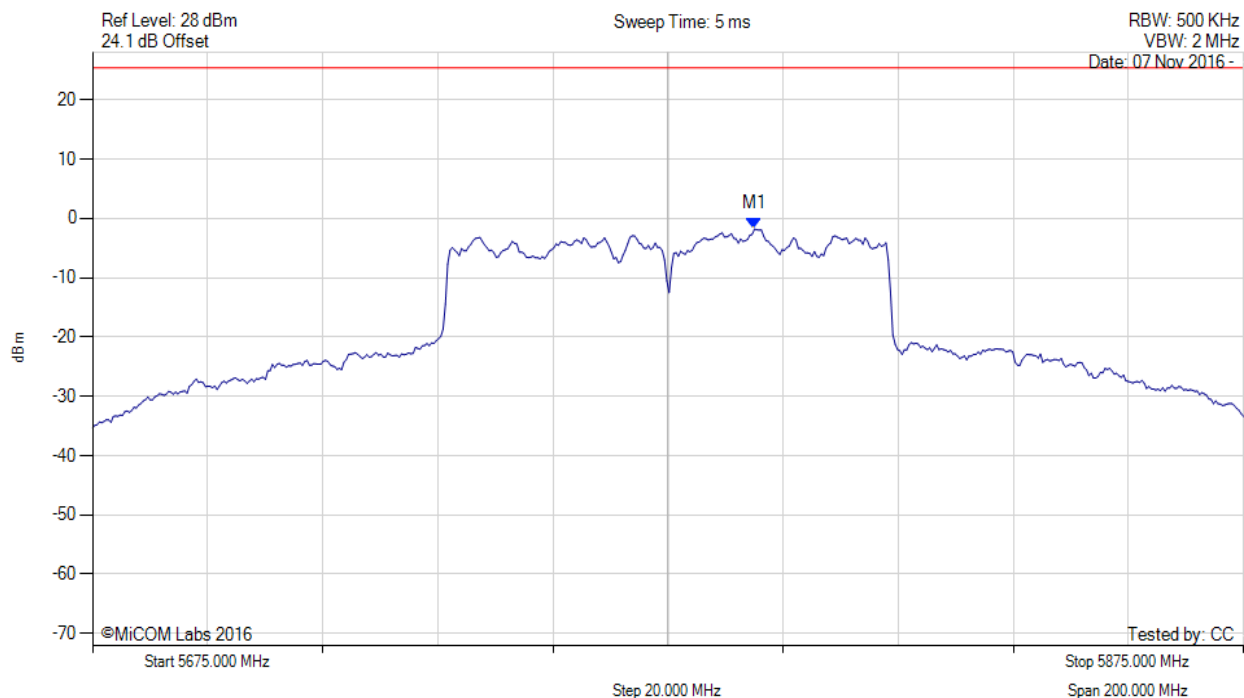

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5790.030 MHz : -1.794 dBm	Limit: ≤ 25.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 105 of 122



POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

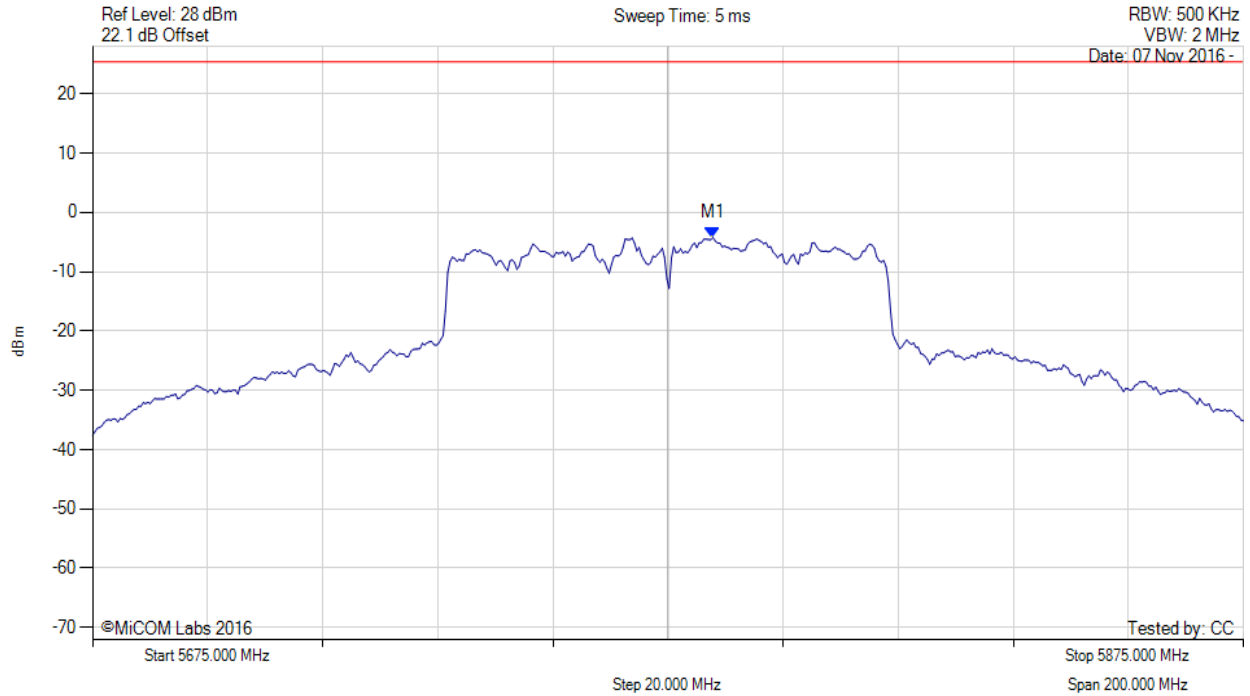

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5782.816 MHz : -4.238 dBm	Limit: ≤ 25.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 106 of 122



POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5775.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

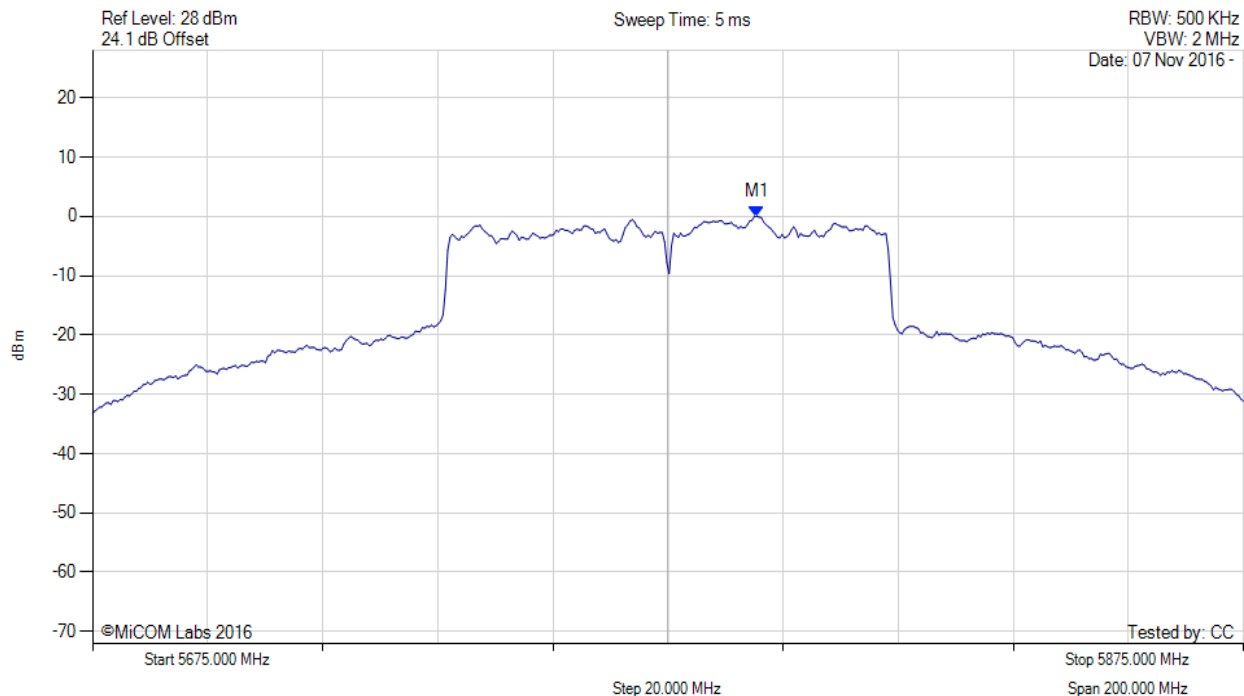

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5790.400 MHz : 0.015 dBm M1 + DCCF : 5790.400 MHz : 0.059 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 28.4 dBm Margin: -28.4 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 107 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5745.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

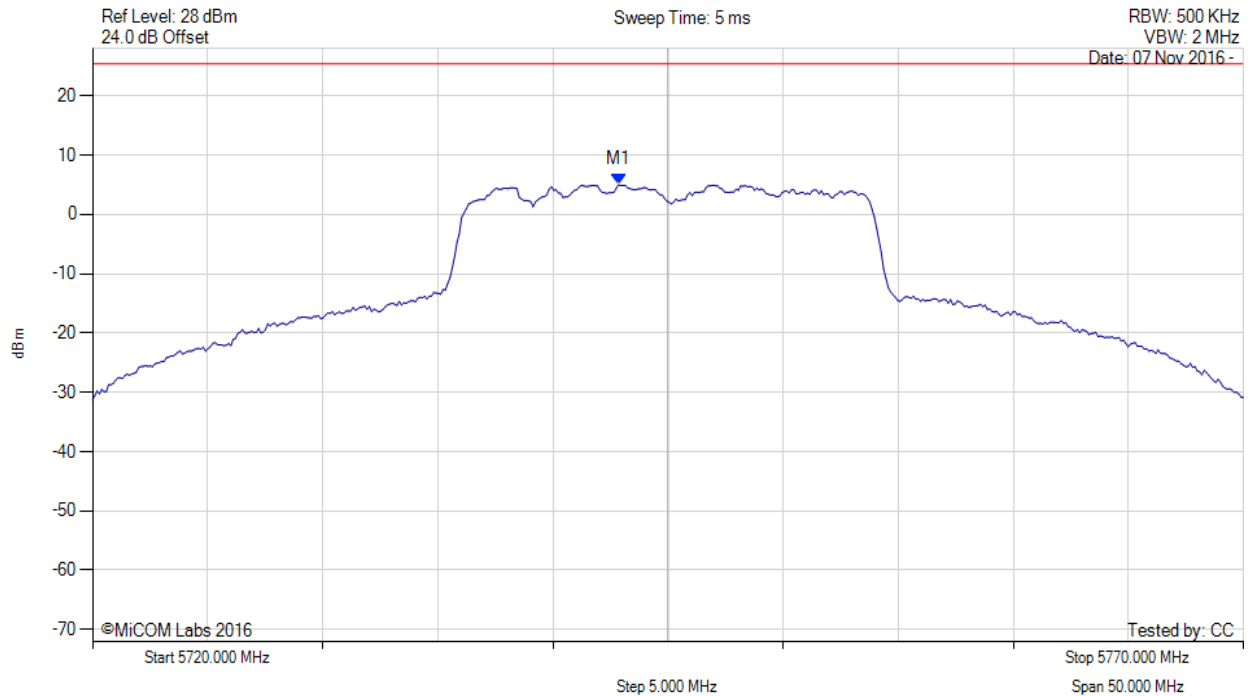

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5742.846 MHz : 4.989 dBm	Limit: ≤ 25.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 108 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5745.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

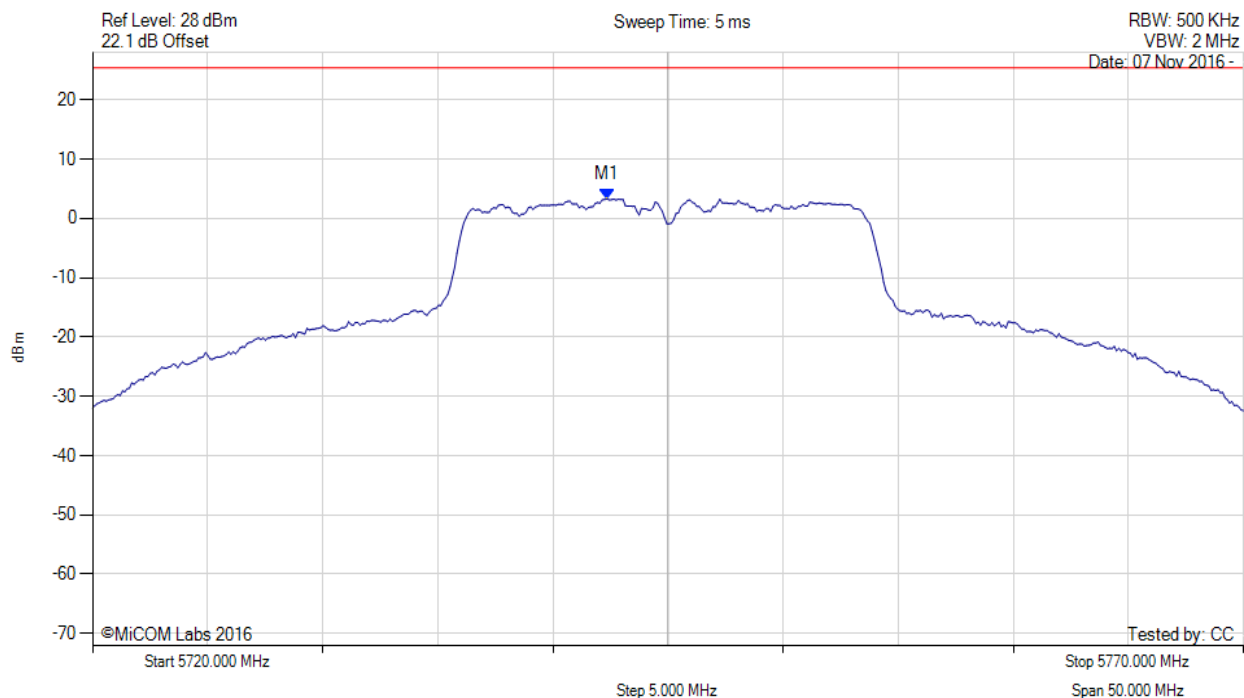

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5742.345 MHz : 3.297 dBm	Limit: ≤ 25.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 109 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5745.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

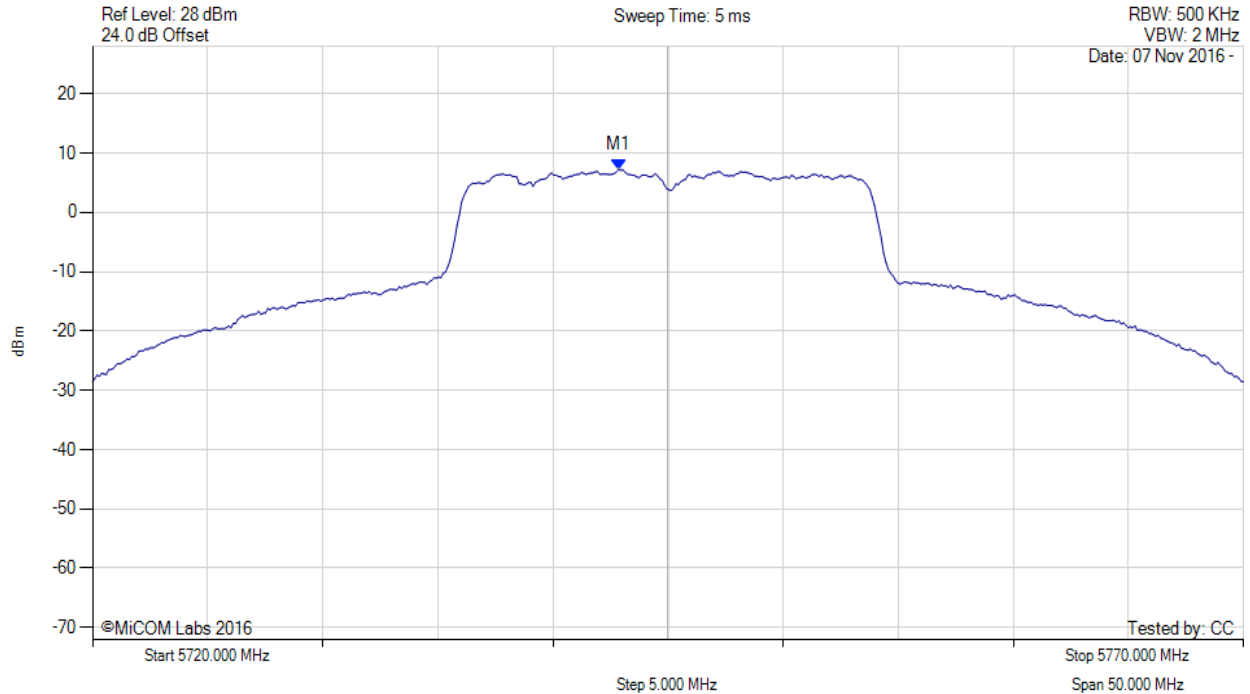

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5742.800 MHz : 7.213 dBm M1 + DCCF : 5742.800 MHz : 7.257 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 28.4 dBm Margin: -21.2 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 110 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5785.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

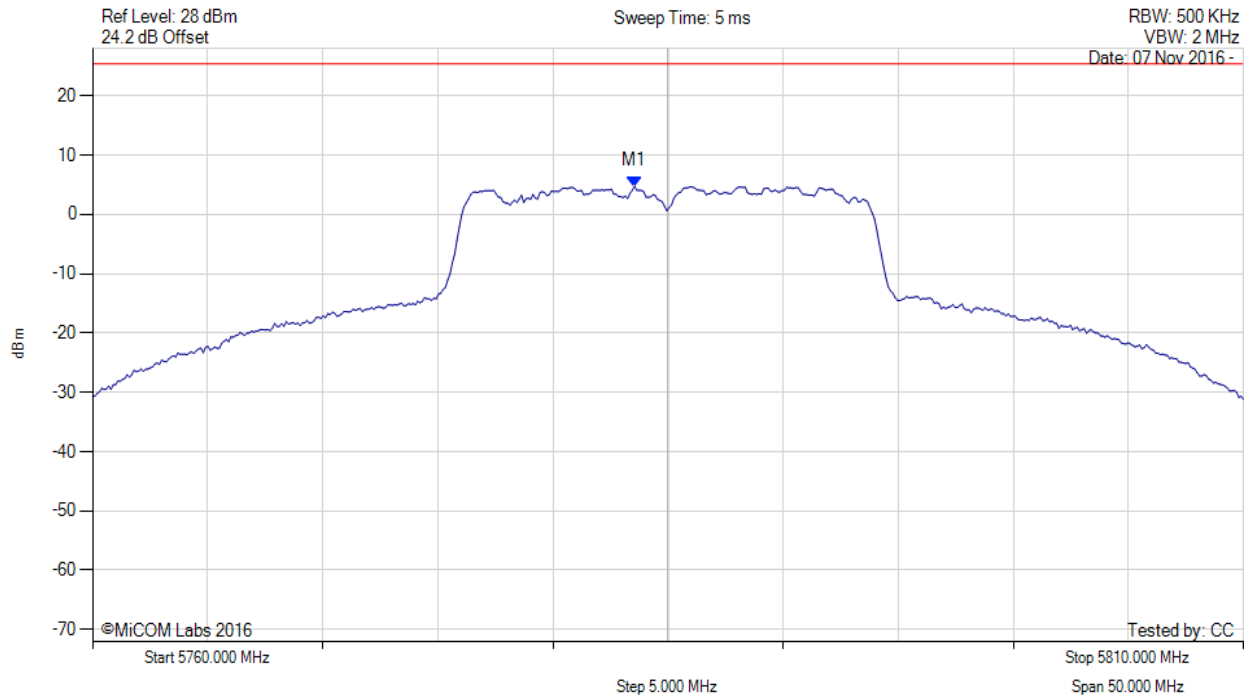

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5783.547 MHz : 4.723 dBm	Limit: ≤ 25.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 111 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5785.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

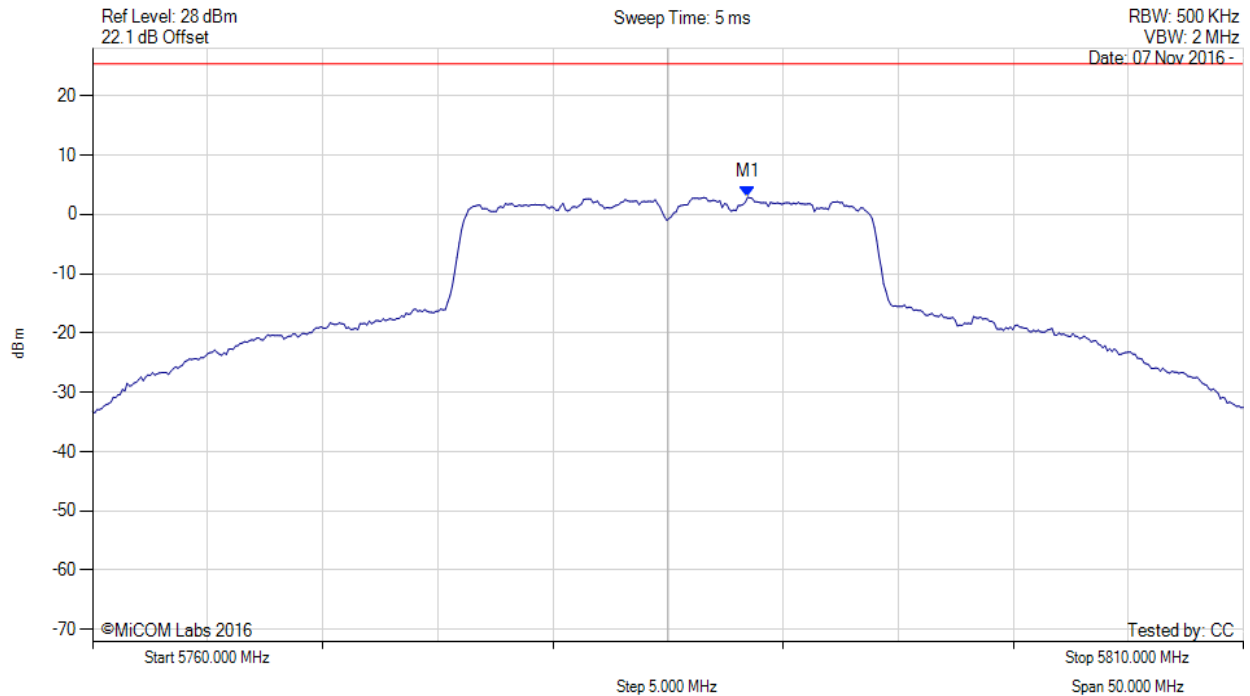

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5788.457 MHz : 2.901 dBm	Channel Frequency: 5785.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 112 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5785.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

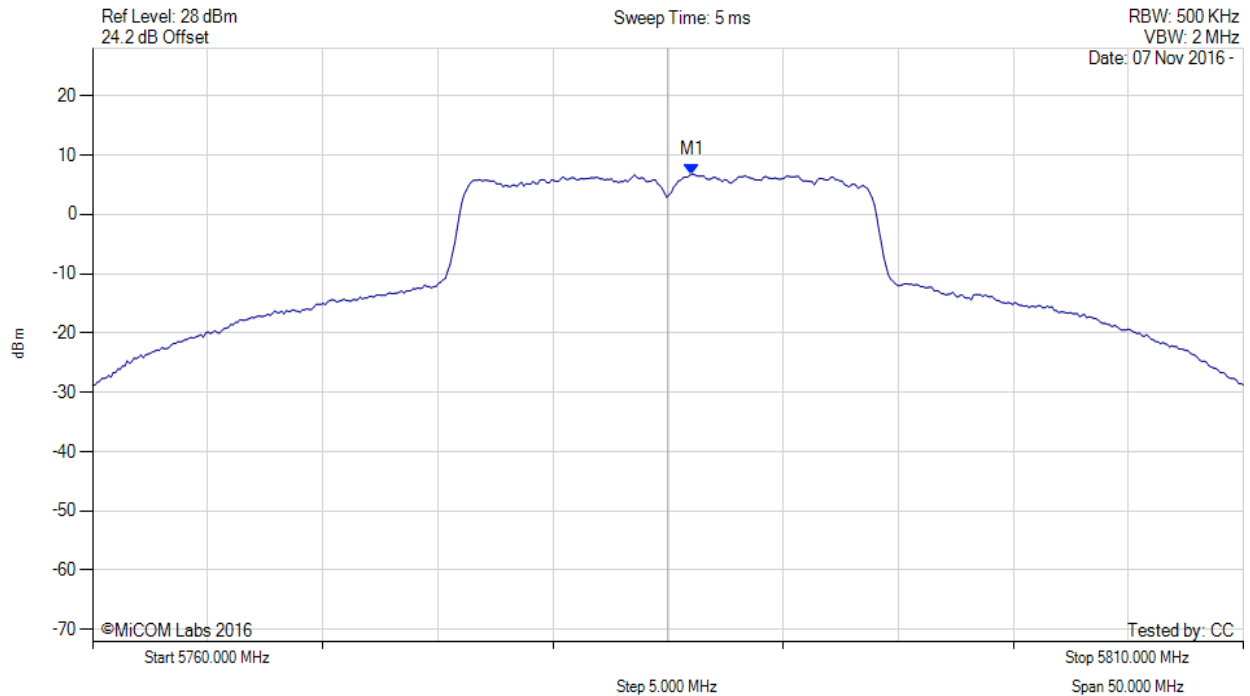

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5786.100 MHz : 6.767 dBm M1 + DCCF : 5786.100 MHz : 6.811 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 28.4 dBm Margin: -21.6 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 113 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5825.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

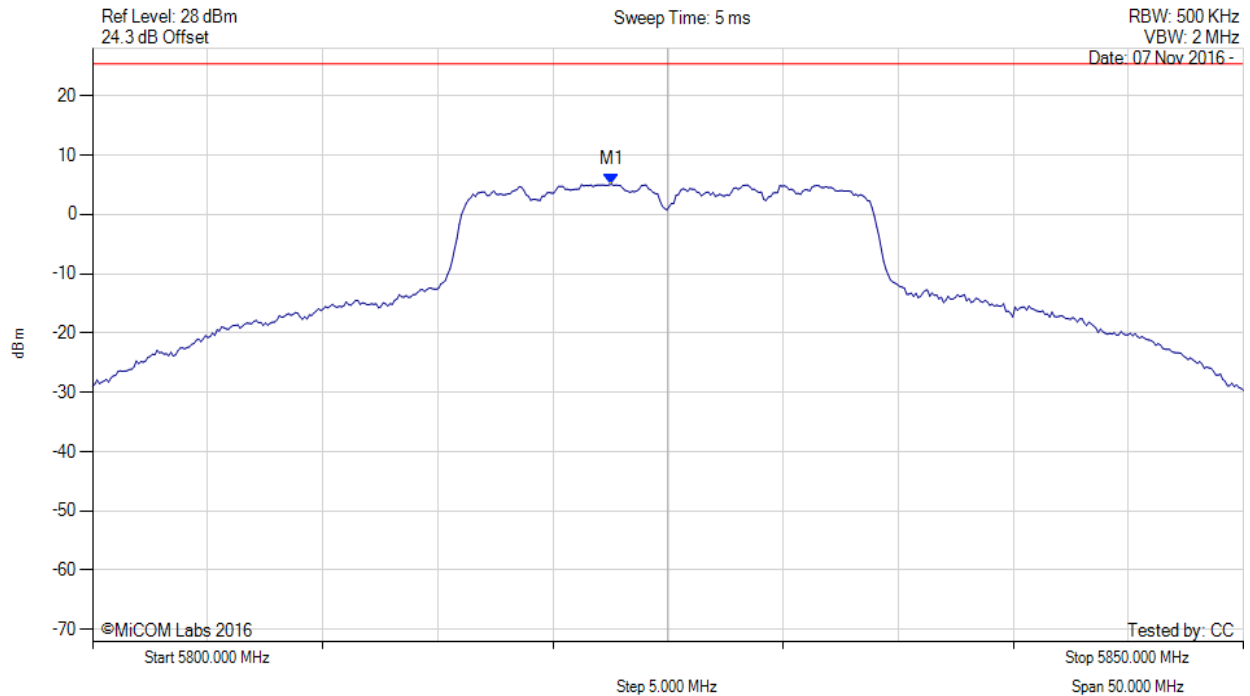

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5822.545 MHz : 5.083 dBm	Limit: ≤ 25.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 114 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5825.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

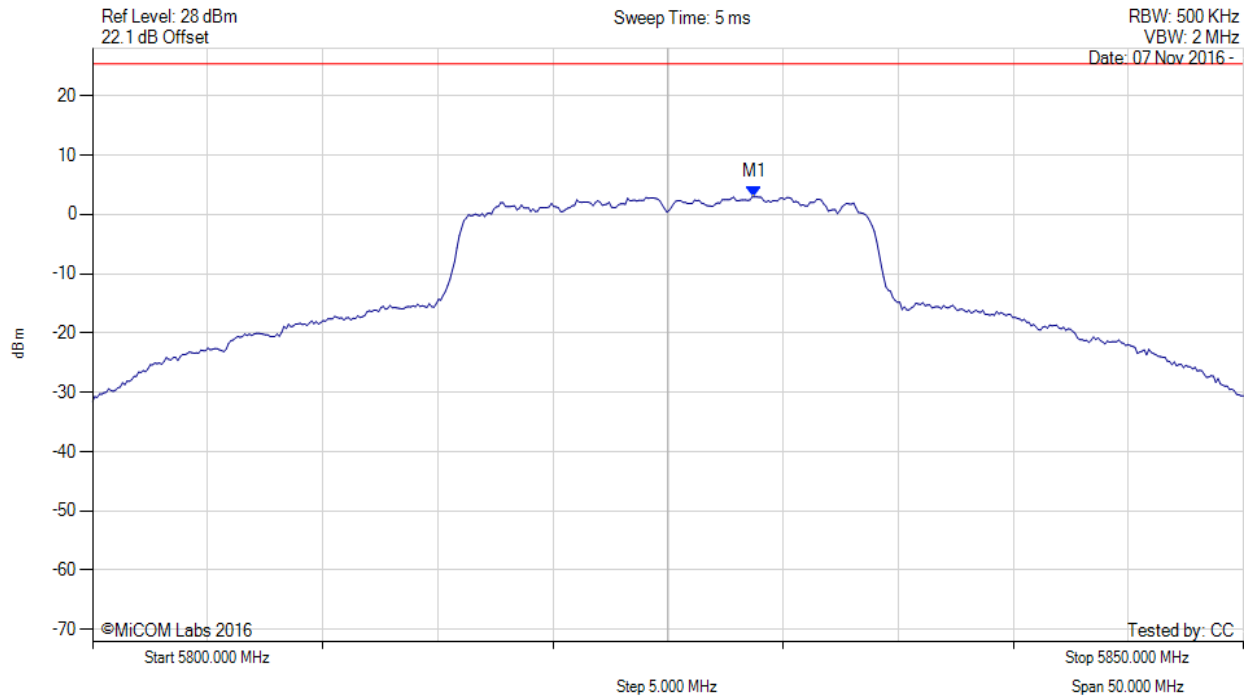

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5828.758 MHz : 2.961 dBm	Limit: ≤ 25.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 115 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5825.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

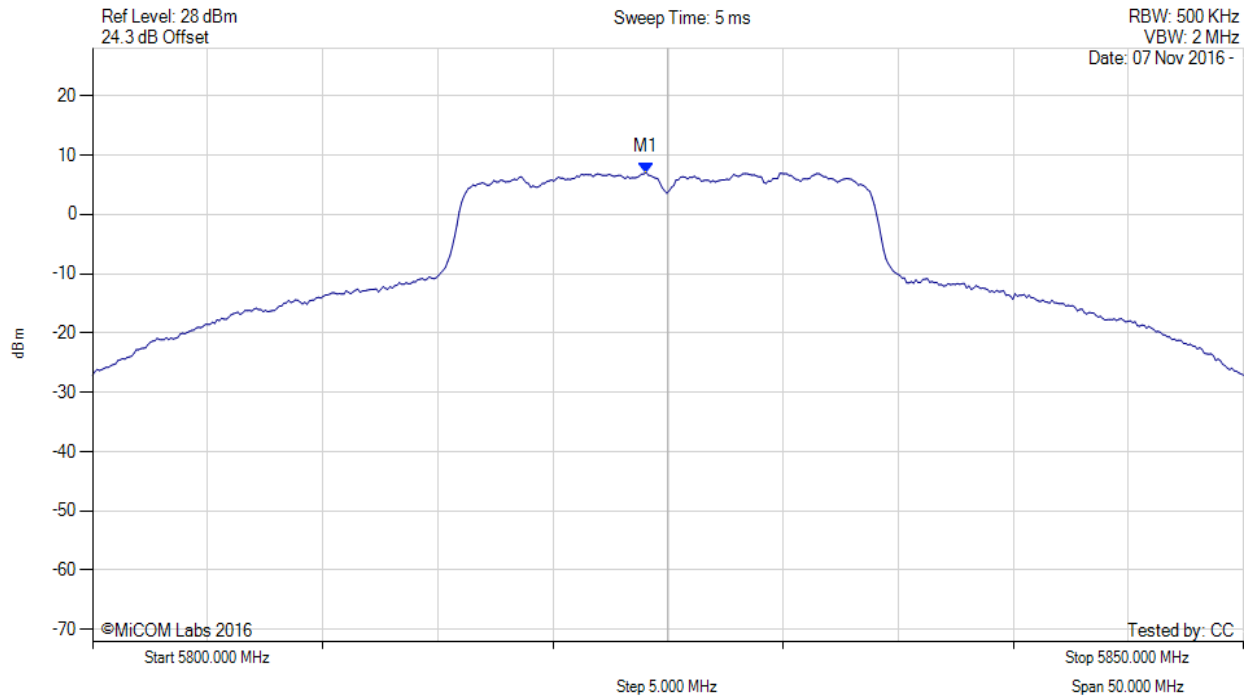

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5824.000 MHz : 7.043 dBm M1 + DCCF : 5824.000 MHz : 7.087 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 28.4 dBm Margin: -21.3 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 116 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5755.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

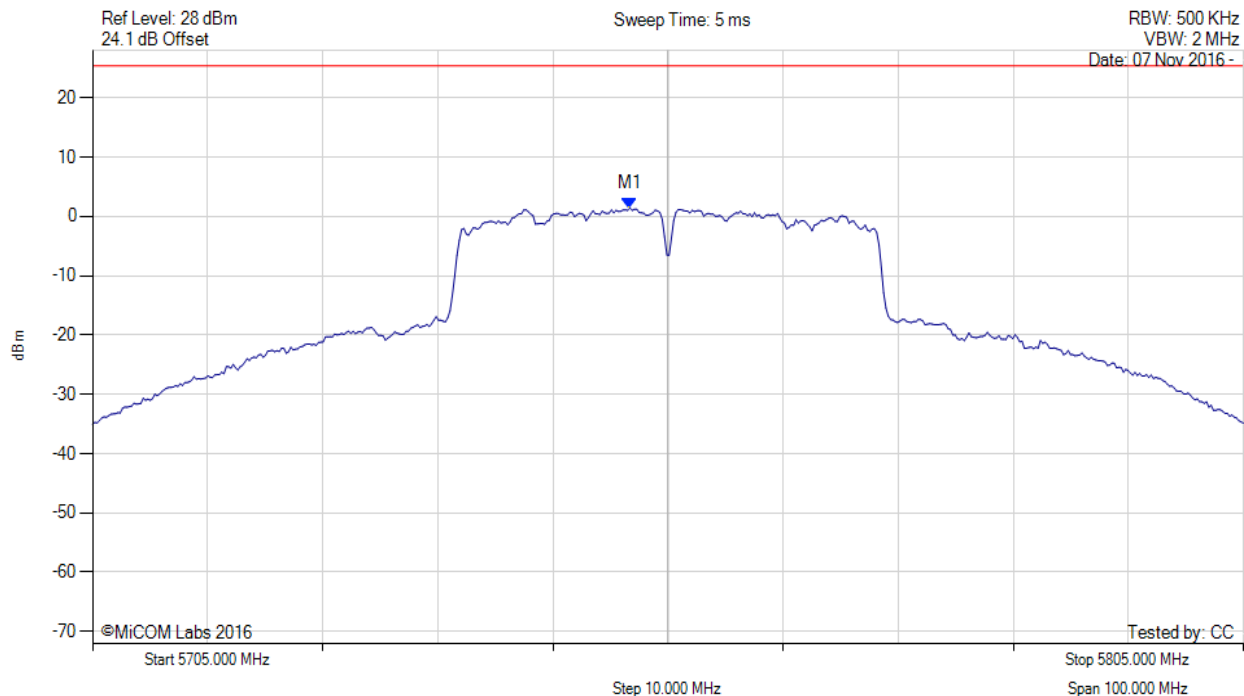

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5751.693 MHz : 1.426 dBm	Limit: ≤ 25.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 117 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5755.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

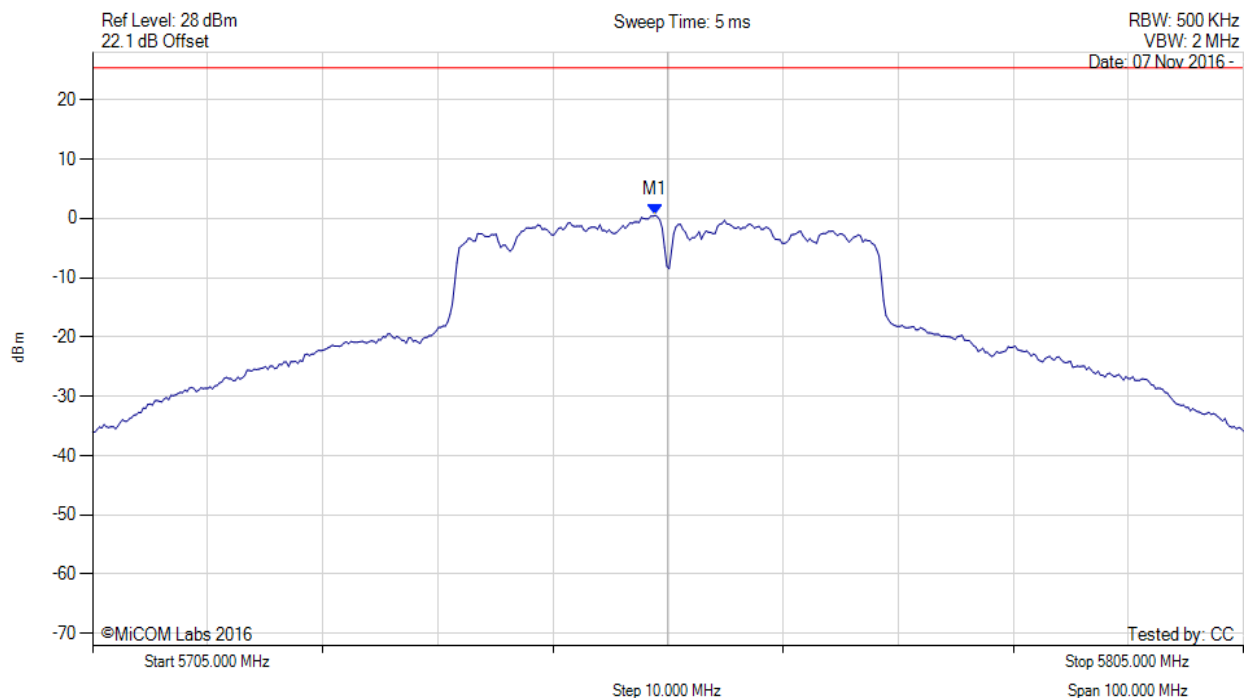

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5753.898 MHz : 0.535 dBm	Limit: ≤ 25.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 118 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5755.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

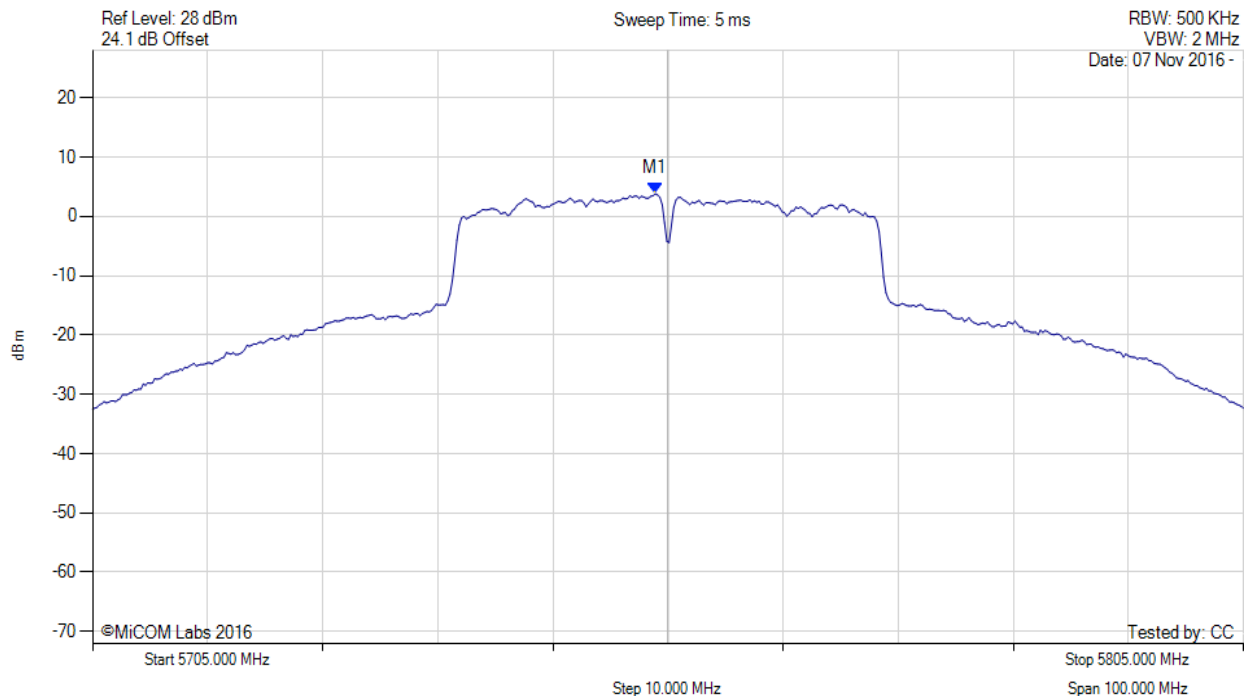

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5753.900 MHz : 3.815 dBm M1 + DCCF : 5753.900 MHz : 3.859 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 28.4 dBm Margin: -24.6 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 119 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5795.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

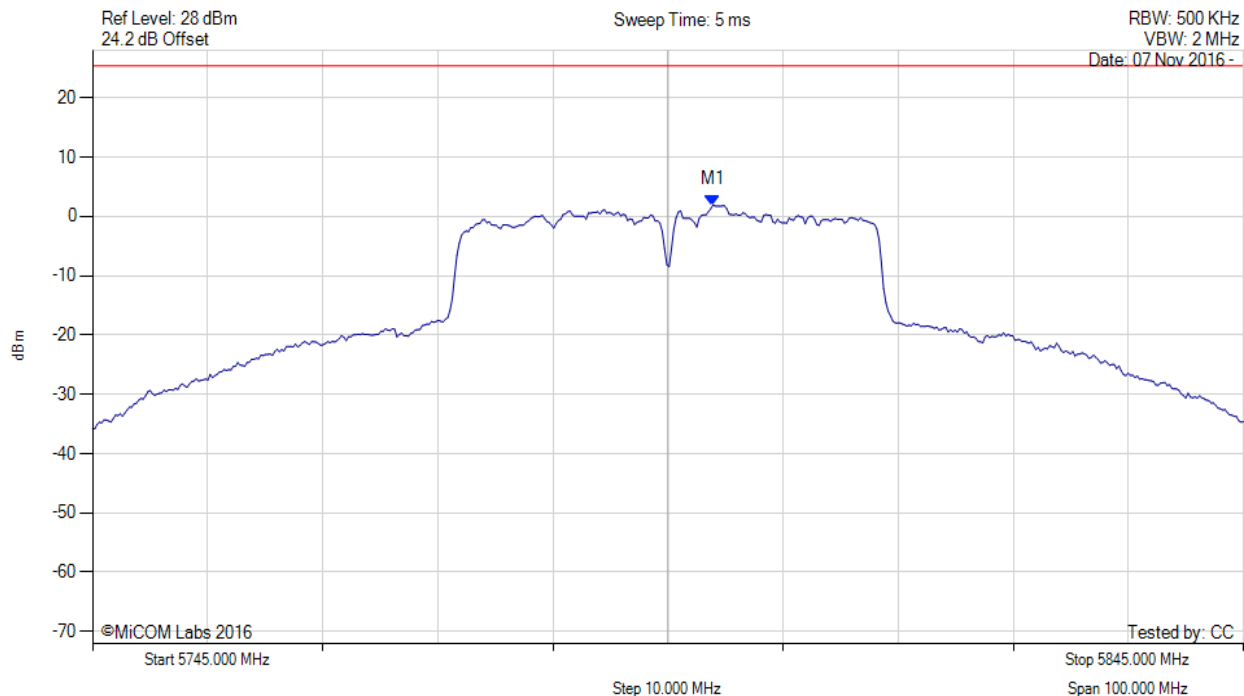

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5798.908 MHz : 1.918 dBm	Limit: ≤ 25.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 120 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5795.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

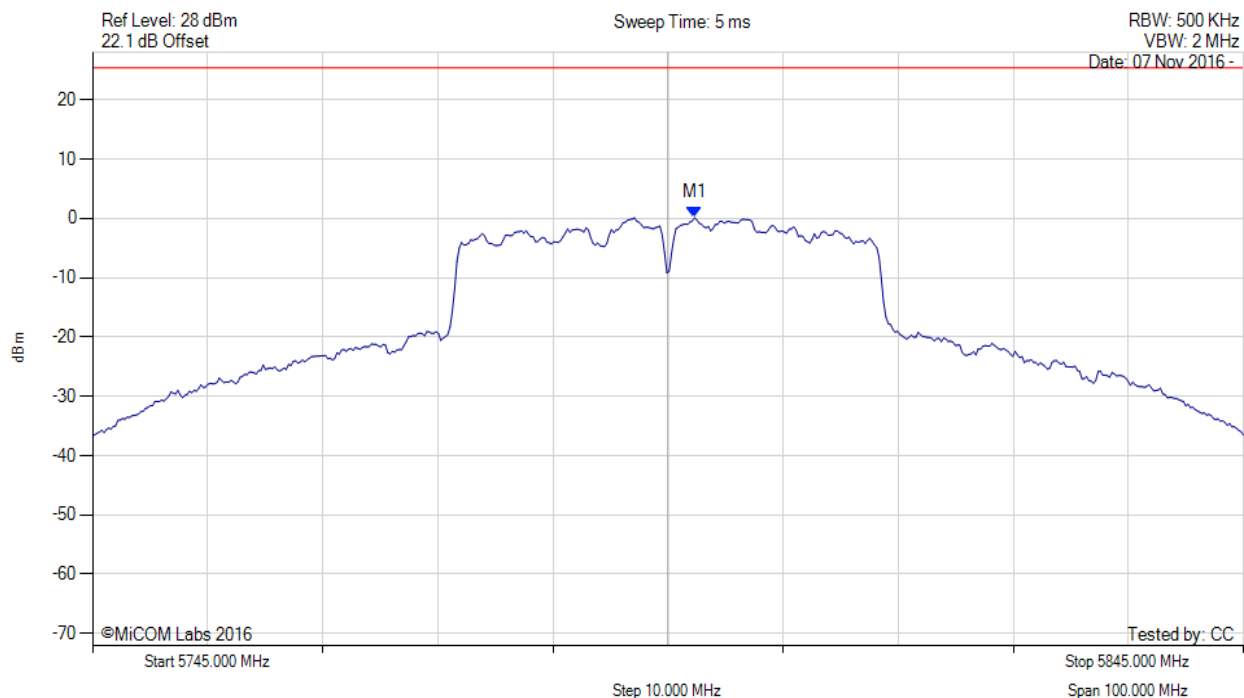

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5797.305 MHz : 0.101 dBm	Limit: ≤ 25.390 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINH303
To: FCC CFR 47 Part 15 Subpart E 15.407(Non-DFS)
Serial #: HWP85-U8_Conducted Rev A
Issue Date: 1st December 2016
Page: 121 of 122



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5795.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

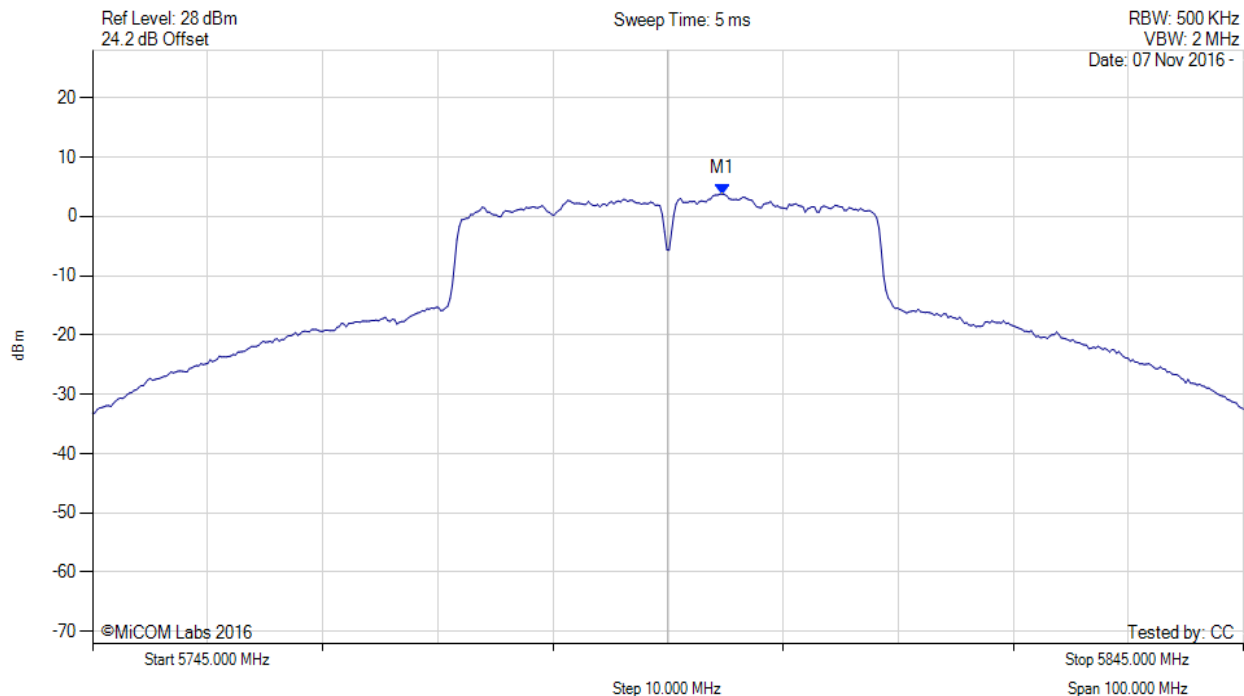

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5799.700 MHz : 3.776 dBm M1 + DCCF : 5799.700 MHz : 3.820 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 28.4 dBm Margin: -24.6 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com