

**Shenzhen Global Test Service Co.,Ltd.**

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong


FCC PART 15 SUBPART C TEST REPORT**FCC PART 15.247****Report Reference No.....: GTS20201124012-1-3****FCC ID.....: Q9OWCP1000**

Compiled by

(position+printed name+signature) .: File administrators Jimmy Wang

Supervised by

(position+printed name+signature) .: Test Engineer Aaron Tan



Approved by

(position+printed name+signature) .: Manager Jason Hu

Date of issue: Nov.24, 2020

Representative Laboratory Name.: Shenzhen Global Test Service Co.,Ltd.

Address.....: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, China

Applicant's name.....: Triamp Technology Ltd.

Address: 3F No.2 Alley 16 Lane235 Bao Chiao Road, Xindian District, New Taipei City, Taiwan

Test specificationStandard: **FCC Part 15.247**

TRF Originator.....: Shenzhen Global Test Service Co.,Ltd.

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description Play2Air Wireless CarPlay Multimedia Adaptor

Trade Mark: ViseeO

Manufacturer: **Triamp Technology Ltd.**

Model/Type reference: WCP-1000

Listed Models: WCP-2000, WCP-3000, WCP1000, WCP2000, WCP3000

Modulation Type.....: CCK/DSSS/ OFDM

Operation Frequency.....: From 2412 - 2462MHz

Rating: DC 5V From External circuit

Hardware version: V1.0

Software version: V1.0

Result: **PASS**

TEST REPORT

Test Report No. : GTS20201124012-1-3	Nov.24, 2020 Date of issue
--	-------------------------------

Equipment under Test : Play2Air Wireless Multimedia Adaptor

Model /Type : WCP-1000

Listed Models : WCP-2000, WCP-3000, WCP1000, WCP2000, WCP3000

Applicant : **Triamp Technology Ltd.**

Address : 3F No.2 Alley 16 Lane235 Bao Chiao Road, Xindian District, New Taipei City, Taiwan

Manufacturer : **Triamp Technology Ltd.**

Address : 3F No.2 Alley 16 Lane235 Bao Chiao Road, Xindian District, New Taipei City, Taiwan

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1</u>	<u>TEST STANDARDS</u>	<u>4</u>
<u>2</u>	<u>SUMMARY</u>	<u>5</u>
2.1	General Remarks	5
2.2	Product Description	5
2.3	Equipment Under Test	5
2.4	Short description of the Equipment under Test (EUT)	5
2.5	EUT operation mode	5
2.6	Block Diagram of Test Setup	6
2.7	Related Submittal(s) / Grant (s)	6
2.8	Modifications	6
<u>3</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
3.1	Address of the test laboratory	7
3.2	Test Facility	7
3.3	Environmental conditions	7
3.4	Test Description	8
3.5	Statement of the measurement uncertainty	8
3.6	Equipments Used during the Test	9
<u>4</u>	<u>TEST CONDITIONS AND RESULTS.....</u>	<u>10</u>
4.1	AC Power Conducted Emission	10
4.2	Radiated Emission	11
4.3	Maximum Conducted Output Power	17
4.4	Power Spectral Density	18
4.5	6dB Bandwidth	21
4.6	Out-of-band Emissions	24
4.7	Antenna Requirement	31
<u>5</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>32</u>
<u>6</u>	<u>PHOTOS OF THE EUT</u>	<u>32</u>

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 v05r02](#): Guidance for Compliance Measurements on Digital Transmission Systems (DTS) ,Frequency Hopping Spread Spectrum System(HFSS), and Hybrid System Devices Operating Under §15.247 of The FCC rules.

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	Oct. 26, 2020
Testing commenced on	:	Oct. 27, 2020
Testing concluded on	:	Nov. 24, 2020

2.2 Product Description

Product Name:	Play2Air Wireless CarPlay Multimedia Adaptor
Model/Type reference:	WCP-1000
DC 5V from external circuit	DC 5V from external circuit
Name: Vehicle control center Model:CL-MJ87X14EC	Name: Vehicle control center Model:CL-MJ87X14EC
Testing sample ID:	GTS20201124012-1-1#(Engineer sample), GTS20201124012-1-2#(Normal sample)
WIFI :	
Supported type:	802.11b/802.11g/802.11n(H20) /802.11n(H40):
Modulation:	802.11b: DSSS 802.11g/802.11n(H20) /802.11n(H40): OFDM
Operation frequency:	802.11b/802.11g/802.11n(H20): 2412MHz~2462MHz 802.11n(H40): 2422MHz~2452MHz
Channel number:	802.11b/802.11g/802.11n(H20): 11 802.11b/802.11g/802.11n(H40): 7
Channel separation:	5MHz
Antenna type:	ceramic antenna
Antenna gain:	1.99 dBi

2.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 5V From external circuit

2.4 Short description of the Equipment under Test (EUT)

This is a Play2Air Wireless CarPlay Multimedia Adaptor.
For more details, refer to the user's manual of the EUT.


2.5 EUT operation mode

The application provider specific test software(AT command) to control sample in continuous TX and RX (Duty Cycle >98%) for testing meet KDB558074 test requirement.

IEEE 802.11b/g/n: Thirteen channels are provided to the EUT.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

2.6 Block Diagram of Test Setup

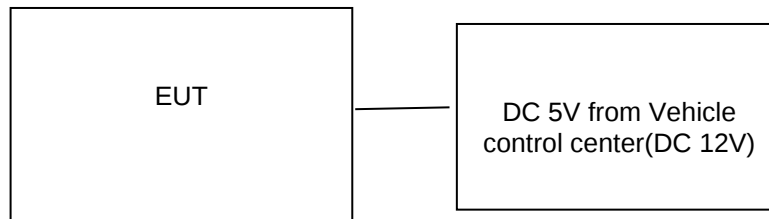

2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID:Q9OWCP1000** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.8 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 165725

Shenzhen Global Test Service Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

A2LA-Lab Cert. No.: 4758.01

Shenzhen Global Test Service Co.,Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

CNAS-Lab Code: L8169

Shenzhen Global Test Service Co.,Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories. Date of Registration: Dec. 11, 2015. Valid time is until Dec. 10, 2018.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

Temperature:	23 ° C
Humidity:	48 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

3.4 Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	N/A
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Conducted Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Maximum Peak Conducted Output Power Power Spectral Density 6dB Bandwidth Spurious RF conducted emission Radiated Emission 9KHz~1GHz& Radiated Emission 1GHz~10 th Harmonic	11b/DSSS	1 Mbps	1/6/11
	11g/OFDM	6 Mbps	1/6/11
	11n(20MHz)/OFDM	6.5Mbps	1/6/11
	11n(40MHz)/OFDM	6.5Mbps	3/6/9
Band Edge	11b/DSSS	1 Mbps	1/11
	11g/OFDM	6 Mbps	1/11
	11n(20MHz)/OFDM	6.5Mbps	1/11
	11n(40MHz)/OFDM	6.5Mbps	3/9

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6 Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.08	2020/09/19	2021/09/18
LISN	R&S	ESH2-Z5	893606/008	2020/09/19	2021/09/18
EMI Test Receiver	R&S	ESPI3	101841-cd	2020/09/19	2021/09/18
EMI Test Receiver	R&S	ESCI7	101102	2020/09/19	2021/09/18
Spectrum Analyzer	Agilent	N9020A	MY48010425	2020/09/19	2021/09/18
Spectrum Analyzer	R&S	FSV40	100019	2020/09/19	2021/09/18
Vector Signal generator	Agilent	N5181A	MY49060502	2020/09/19	2021/09/18
Signal generator	Agilent	E4421B	3610AO1069	2020/09/19	2021/09/18
Climate Chamber	ESPEC	EL-10KA	A20120523	2020/09/19	2021/09/18
Controller	EM Electronics	Controller EM 1000	N/A	N/A	N/A
Horn Antenna	Schwarzbeck	BBHA 9120D	01622	2020/09/19	2021/09/18
Active Loop Antenna	Beijing Da Ze Technology Co.,Ltd.	ZN30900C	15006	2020/10/11	2021/10/10
Bilog Antenna	Schwarzbeck	VULB9163	000976	2020/05/26	2021/05/25
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2020/09/19	2021/09/18
Amplifier	Schwarzbeck	BBV 9743	#202	2020/09/19	2021/09/18
Amplifier	Schwarzbeck	BBV9179	9719-025	2020/09/19	2021/09/18
Amplifier	EMCI	EMC051845B	980355	2020/09/19	2021/09/18
Temperature/Humidity Meter	Gangxing	CTH-608	02	2020/09/19	2021/09/18
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	KL142031	2020/09/19	2021/09/18
High-Pass Filter	K&L	41H10-1375/U12750-O/O	KL142032	2020/09/19	2021/09/18
RF Cable(below 1GHz)	HUBER+SUHNER	RG214	RE01	2020/09/19	2021/09/18
RF Cable(above 1GHz)	HUBER+SUHNER	RG214	RE02	2020/09/19	2021/09/18
Data acquisition card	Agilent	U2531A	TW53323507	2020/09/19	2021/09/18
Power Sensor	Agilent	U2021XA	MY5365004	2020/09/19	2021/09/18
Test Control Unit	Tonscend	JS0806-1	178060067	2020/06/19	2021/06/18
Automated filter bank	Tonscend	JS0806-F	19F8060177	2020/06/19	2021/06/18
EMI Test Software	Tonscend	JS1120-1	Ver 2.6.8.0518	/	/
EMI Test Software	Tonscend	JS1120-3	Ver 2.5.77.0418	/	/
EMI Test Software	Tonscend	JS32-CE	Ver 2.5	/	/
EMI Test Software	Tonscend	JS32-RE	Ver 2.5.1.8	/	/

Note: The Cal.Interval was one year.

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

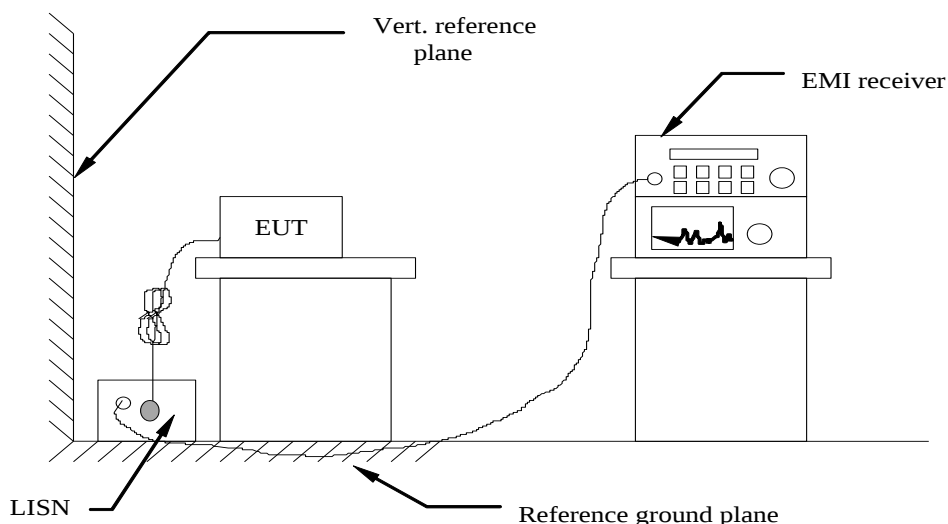

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 12V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.


TEST RESULTS

This device is Car Equipment, so this test item is not applicable for it.


4.2 Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

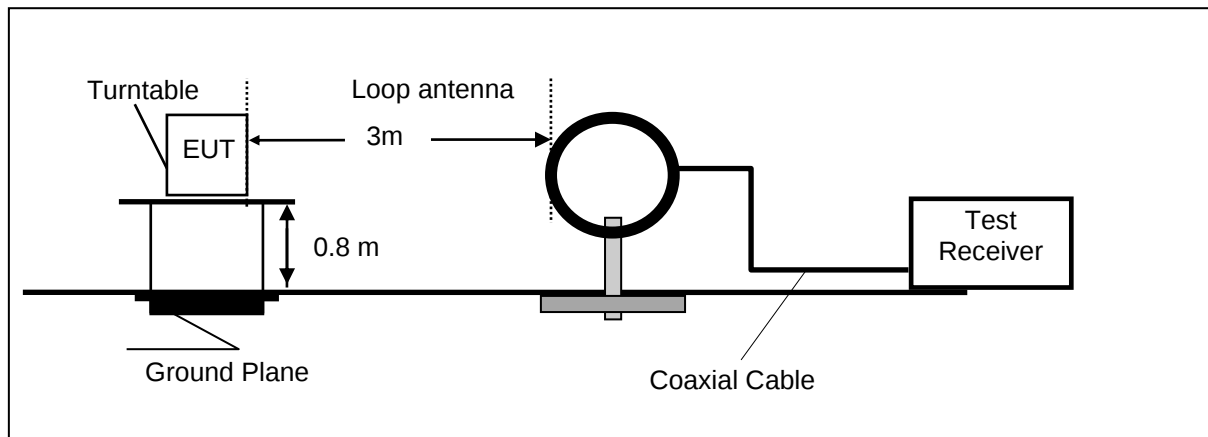

Frequency range 30MHz – 1000MHz

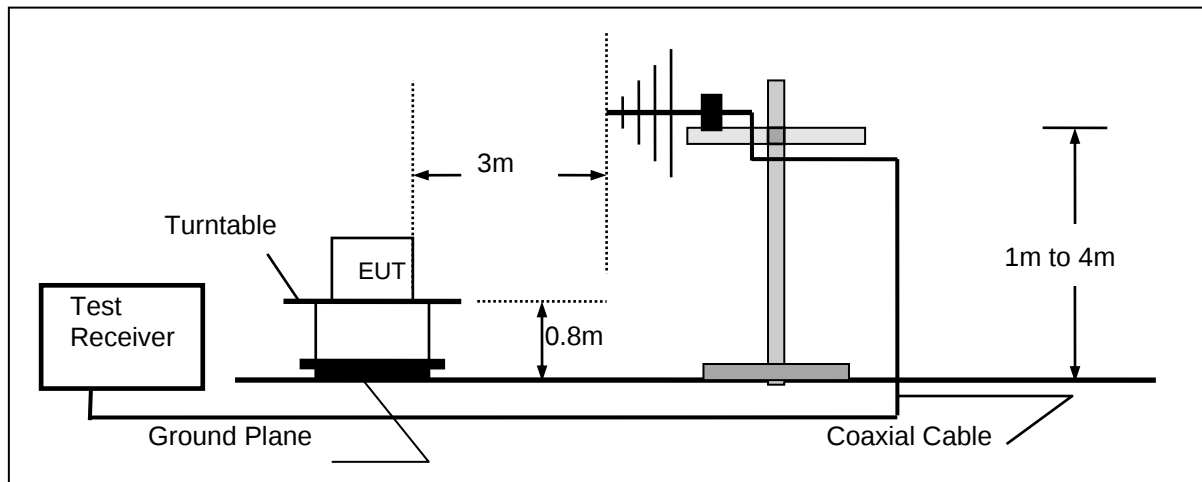

Frequency range above 1GHz-25GHz

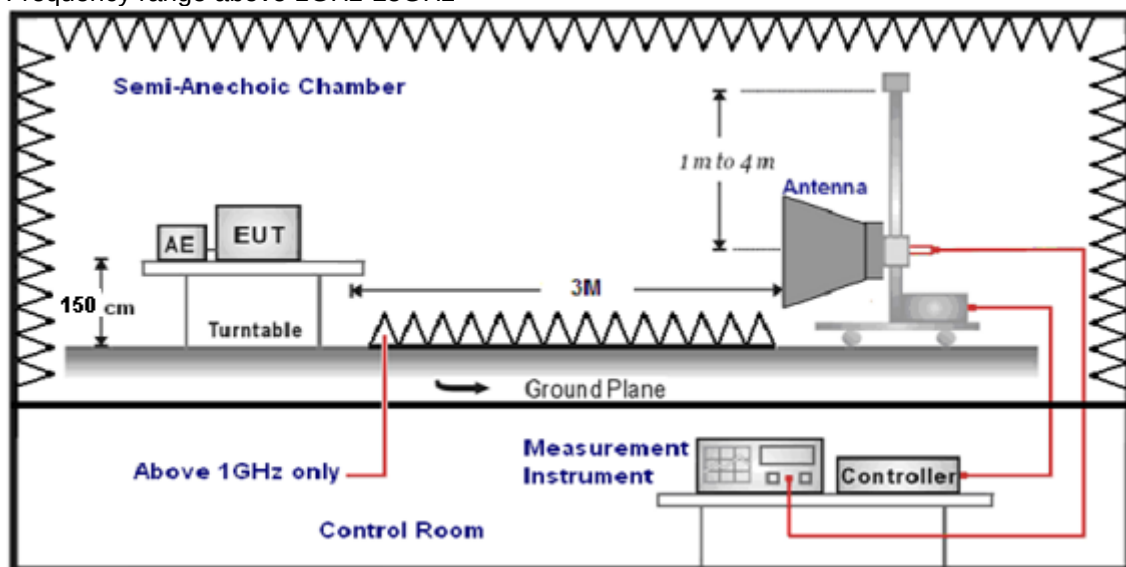

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd}=AF +CL-AG$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X


- position.
- All three channels (lowest/middle/highest) of each mode were measured below 1GHz and recorded worst case at 802.11b low channel.
 - Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
 - Remark: Result=Reading value+Factor

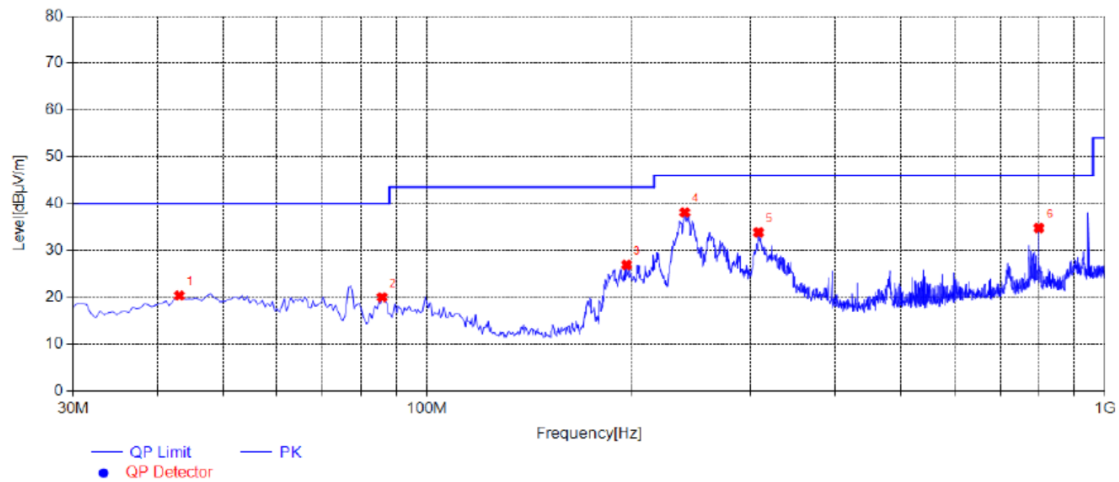For 30MHz-1GHz**Horizontal****Suspected List**

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	43.0950	26.95	-6.56	20.39	40.00	19.61	100	62	PK	Horizontal	PASS
2	85.7750	31.61	-11.57	20.04	40.00	19.96	100	4	PK	Horizontal	PASS
3	196.8400	36.27	-9.34	26.93	43.50	16.57	100	2	PK	Horizontal	PASS
4	240.0050	46.77	-8.62	38.15	46.00	7.85	100	24	PK	Horizontal	PASS
5	308.3900	41.19	-7.32	33.87	46.00	12.13	100	28	PK	Horizontal	PASS
6	798.7250	33.65	1.16	34.81	46.00	11.19	100	18	PK	Horizontal	PASS

Note: 1. Result (dBμV/m) = Reading (dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

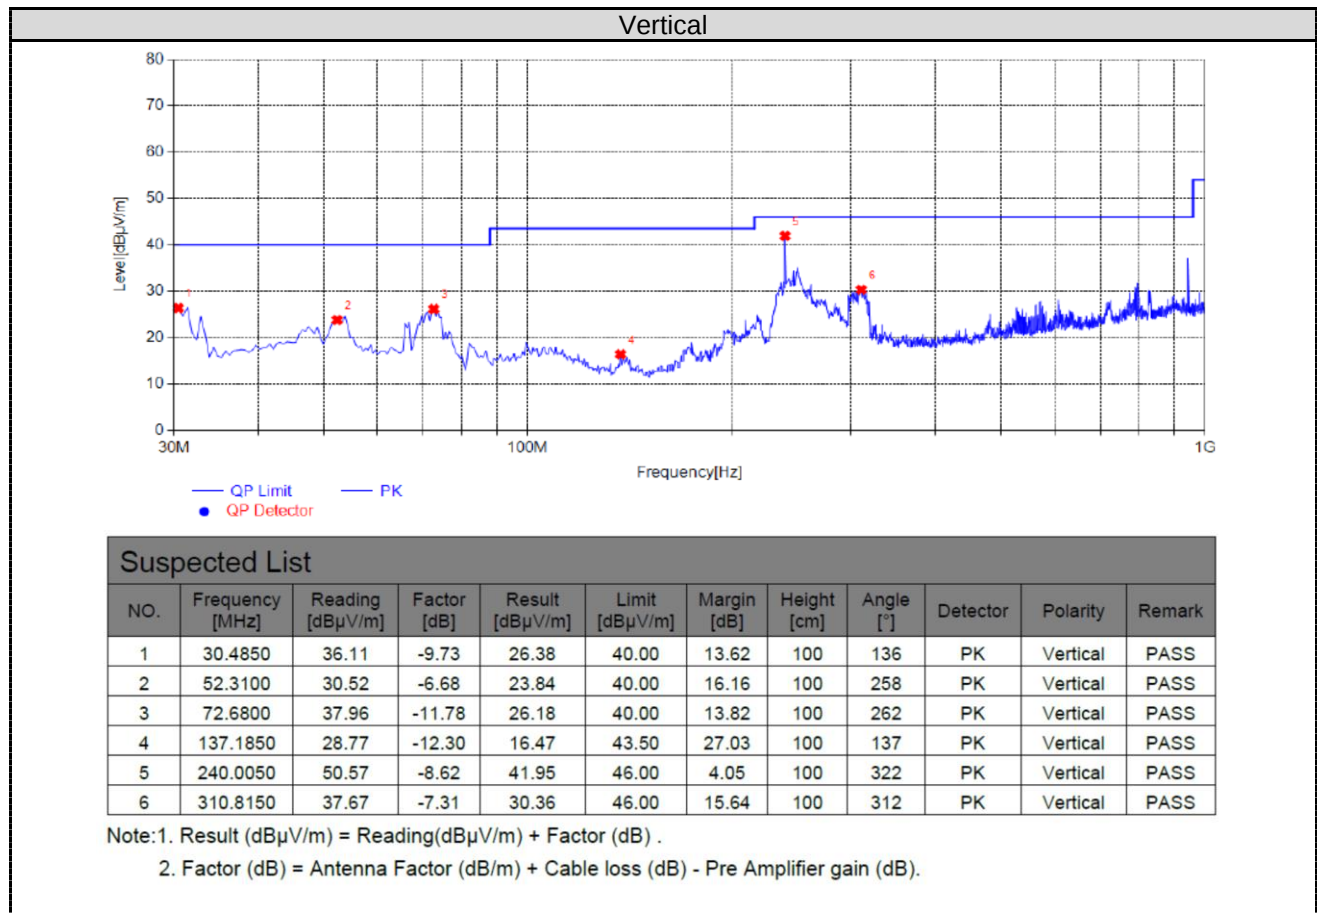

For 1GHz to 25GHz

Note: 802.11b/802.11g/802.11n (H20) all have been tested, only worse case 802.11b mode is reported

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
802.11b-2412MHz									
V	4824	56.03	30.28	7.01	36.5	56.82	74	17.18	PK
V	4824	41.75	30.28	7.01	36.5	42.54	54	11.46	AV
H	4824	55.22	30.28	7.01	36.5	56.01	74	17.99	PK
H	4824	41.18	30.28	7.01	36.5	41.97	54	12.03	AV
V	7236	41.39	36.59	8.91	35.3	51.59	74	22.41	PK
V	7236	29.75	36.59	8.91	35.3	39.95	54	14.05	AV
H	7236	41.66	36.59	8.91	35.3	51.86	74	22.14	PK
H	7236	29.71	36.59	8.91	35.3	39.91	54	14.09	AV
802.11b -2437MHz									
V	4874	55.47	30.36	7.62	36.5	56.95	74	17.05	PK
V	4874	40.25	30.36	7.62	36.5	41.73	54	12.27	AV
H	4874	55.33	30.36	7.62	36.5	56.81	74	17.19	PK
H	4874	40.69	30.36	7.62	36.5	42.17	54	11.83	AV
V	7311	40.42	36.61	8.84	35.3	50.57	74	23.43	PK
V	7311	29.65	36.61	8.84	35.3	39.8	54	14.2	AV
H	7311	39.42	36.61	8.84	35.3	49.57	74	24.43	PK
H	7311	30.33	36.61	8.84	35.3	40.48	54	13.52	AV
802.11b -2462MHz									
V	4924	57.62	30.43	7.94	36.2	59.79	74	14.21	PK
V	4924	40.42	30.43	7.94	36.2	42.59	54	11.41	AV
H	4924	56.68	30.43	7.94	36.2	58.85	74	15.15	PK
H	4924	40.51	30.43	7.94	36.2	42.68	54	11.32	AV
V	7386	40.72	36.78	8.45	35.3	50.65	74	23.35	PK
V	7386	29.68	36.78	8.45	35.3	39.61	54	14.39	AV
H	7386	41.51	36.78	8.45	35.3	51.44	74	22.56	PK
H	7386	30.39	36.78	8.45	35.3	40.32	54	13.68	AV

Note:

- 1) Emission level (dBuV/m) = Meter Reading+ antenna Factor+ cable loss- preamp factor.
- 2) Margin value = Limits-Emission level.
- 3) -- Mean the PK detector measured value is below average limit.
- 4) The other emission levels were very low against the limit.
- 5) RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Results of Band Edges Test (Radiated)

Note: 802.11b/802.11g/802.11n (H20) all have been tested, only worse case 802.11b mode is reported

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
802.11b -2412MHz									
V	2390	58.42	27.49	3.32	36.22	53.01	74	20.99	PK
V	2390	45.19	27.49	3.32	36.22	39.78	54	14.22	AV
H	2390	58.25	27.49	3.32	36.22	52.84	74	21.16	PK
H	2390	43.11	27.49	3.32	36.22	37.70	54	16.30	AV
V	2400	59.42	27.55	3.41	36.22	54.16	74	19.84	PK
V	2400	47.56	27.55	3.41	36.22	42.30	54	11.70	AV
H	2400	60.49	27.55	3.41	36.22	55.23	74	18.77	PK
H	2400	46.55	27.55	3.41	36.22	41.29	54	12.71	AV
802.11b -2462MHz									
V	2483.50	56.76	27.45	3.38	36.34	51.25	74	22.75	PK
V	2483.50	44.55	27.45	3.38	36.34	39.04	54	14.96	AV
H	2483.50	56.17	27.45	3.38	36.34	50.66	74	23.34	PK
H	2483.50	44.69	27.45	3.38	36.34	39.18	54	14.82	AV
V	2500.00	55.84	27.41	3.47	36.35	50.37	74	23.63	PK
V	2500.00	44.22	27.41	3.47	36.35	38.75	54	15.25	AV
H	2500.00	55.65	27.41	3.47	36.35	50.18	74	23.82	PK
H	2500.00	43.67	27.41	3.47	36.35	38.2	54	15.8	AV

Note:

- 1) Emission level (dBuV/m) = Meter Reading+ antenna Factor+ cable loss- preamp factor.
- 2) Margin value = Limits-Emission level.
- 3) -- Mean the PK detector measured value is below average limit.
- 4) The other emission levels were very low against the limit.
- 5) RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

4.3 Maximum Conducted Output Power


Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results

Type	Channel	Output power PK (dBm)	Limit (dBm)	Result
802.11b	01	20.25	30.00	Pass
	06	20.42		
	11	20.29		
802.11g	01	19.93	30.00	Pass
	06	20.01		
	11	19.11		
802.11n(HT20)	01	19.77	30.00	Pass
	06	19.73		
	11	18.94		
802.11n(HT40)	03	18.04	30.00	Pass
	06	18.17		
	09	18.25		

Note:

- 1) Measured output power at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss.
- 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 6.5Mbps at IEEE 802.11n HT40;

4.4 Power Spectral Density


Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW ≥ 3 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.

Test Configuration











Test Results









Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	-7.145	8.00	Pass
	06	-7.103		
	11	-6.331		
802.11g	01	-9.119	8.00	Pass
	06	-8.965		
	11	-9.131		
802.11n(HT20)	01	-9.941	8.00	Pass
	06	-11.120		
	11	-9.138		
802.11n(HT40)	03	-12.860	8.00	Pass
	06	-13.400		
	09	-12.180		

Note:

- 1) Measured peak power spectrum density at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss;
- 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 6.5Mbps at IEEE 802.11n HT40;

Please refer to following plots;

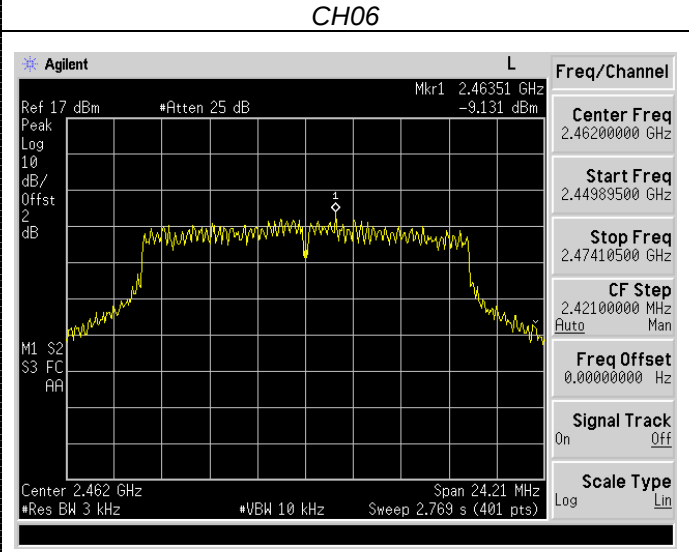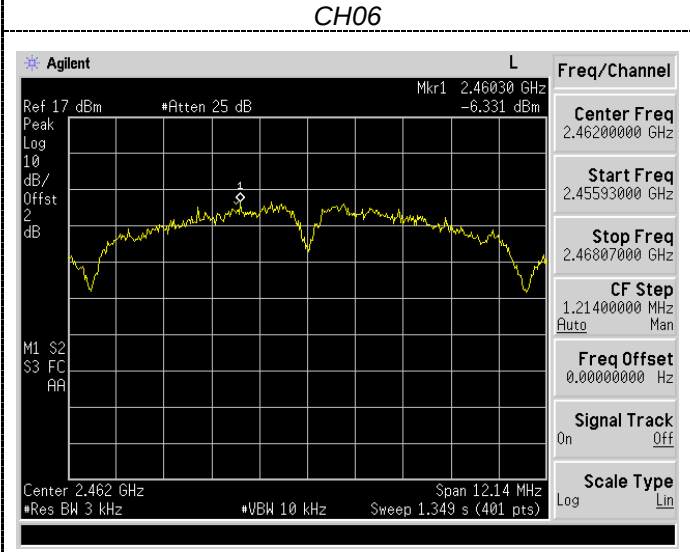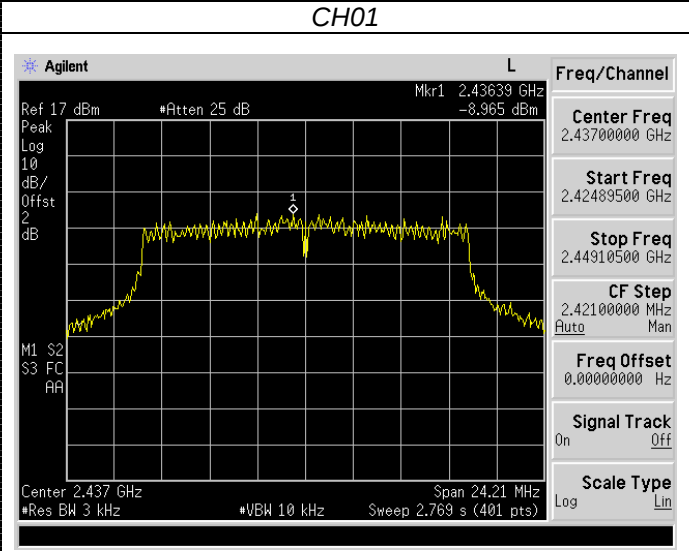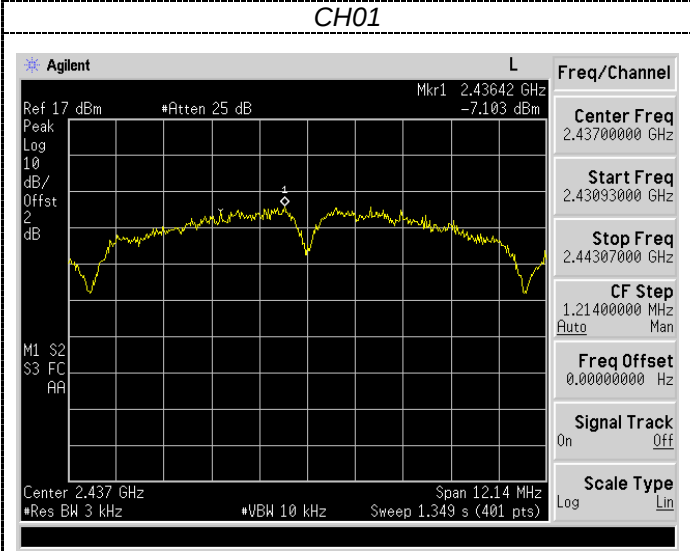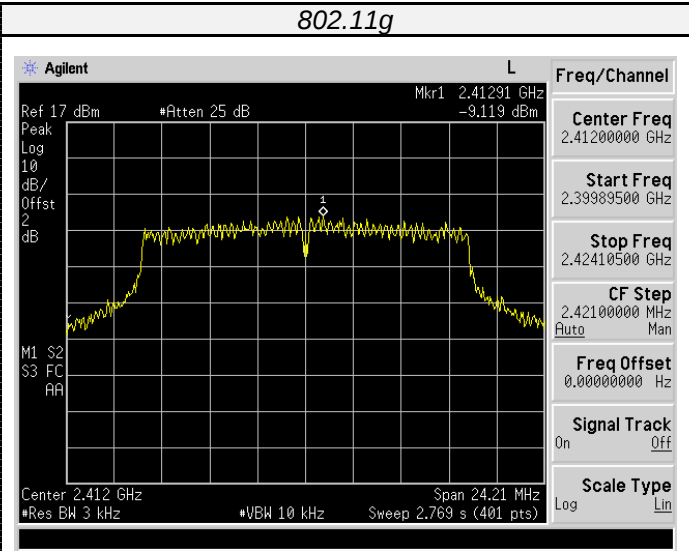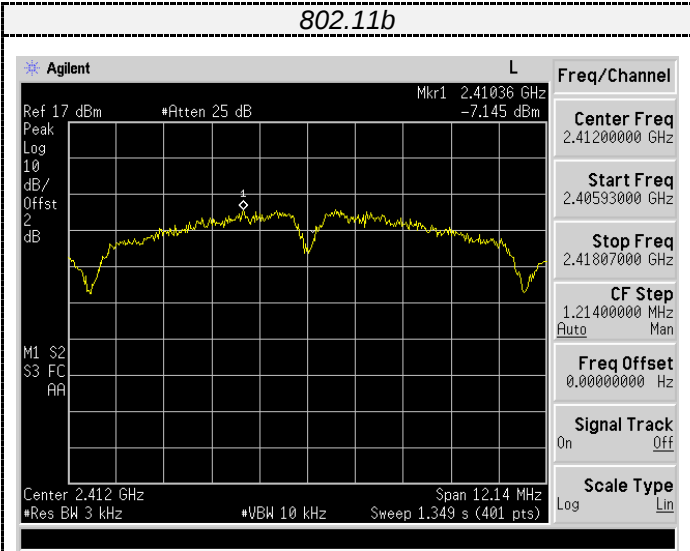

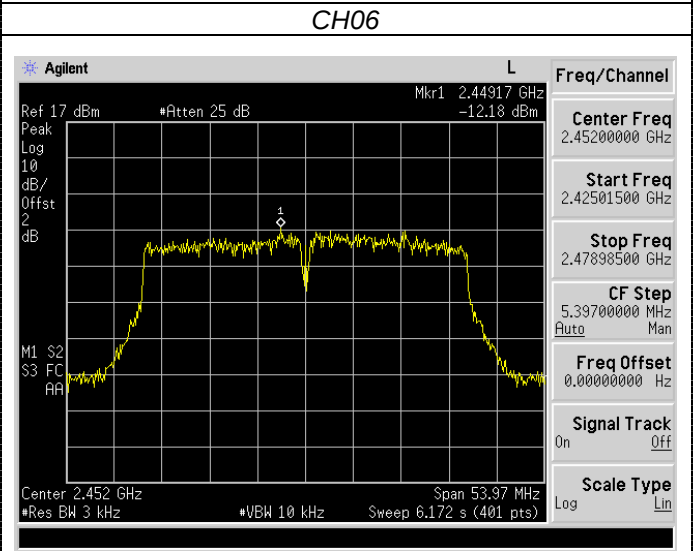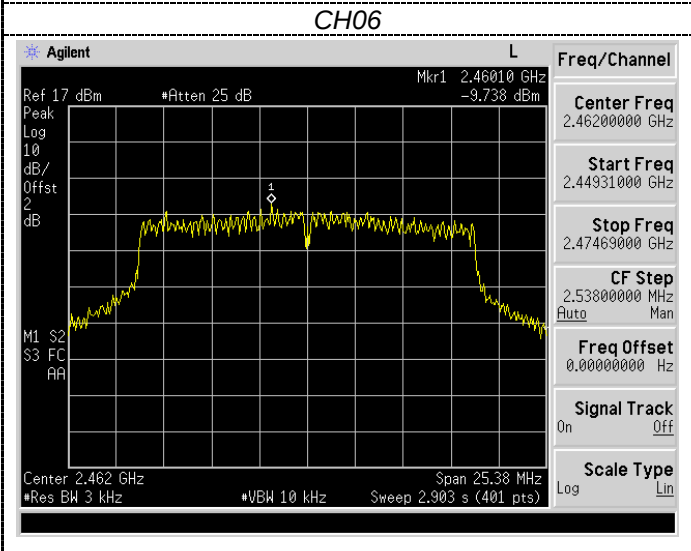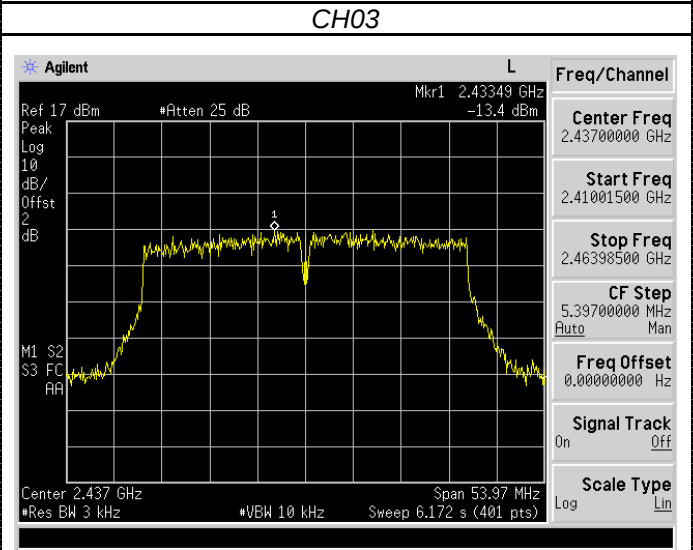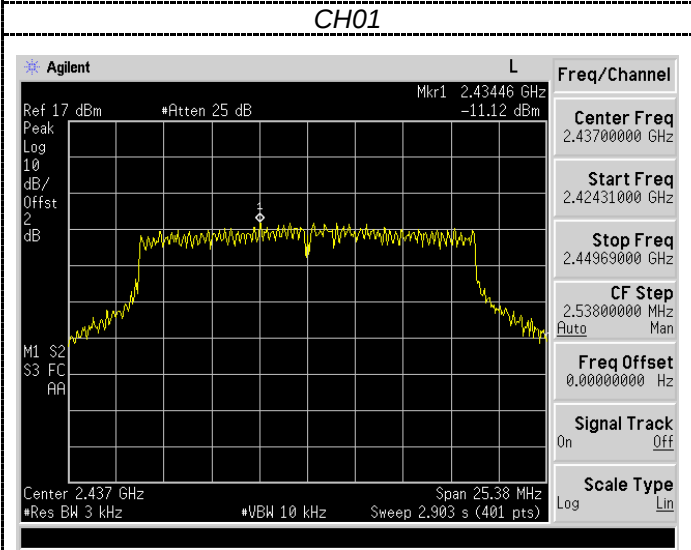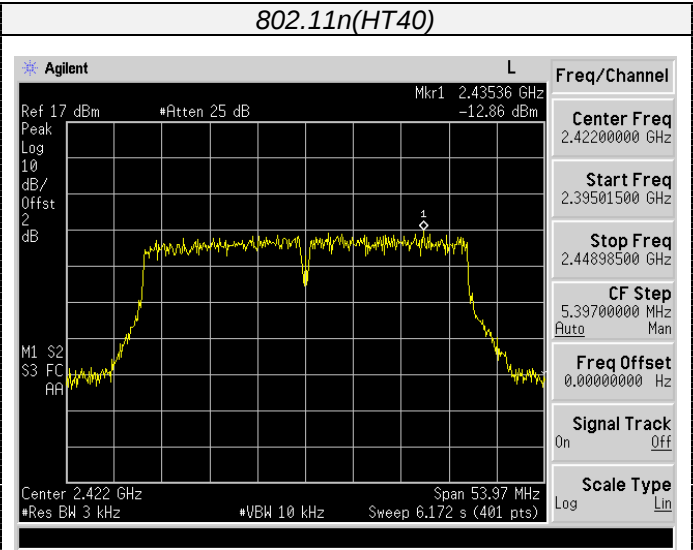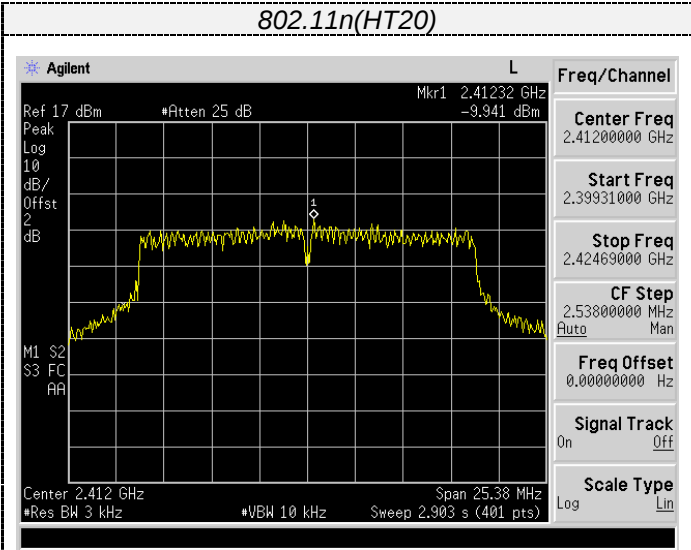

4.5 6dB Bandwidth


Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

Test Configuration



Test Results


Type	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11b	01	7.566	≥500	Pass
	06	8.091		
	11	7.569		
802.11g	01	15.278	≥500	Pass
	06	16.143		
	11	15.390		
802.11n(HT20)	01	16.819	≥500	Pass
	06	16.918		
	11	16.153		
802.11n(HT40)	03	35.885	≥500	Pass
	06	35.983		
	09	35.603		

Note:


- 1) Measured peak power spectrum density at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss;
- 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 6.5Mbps at IEEE 802.11n HT40;

Please refer to following plots;


802.11b

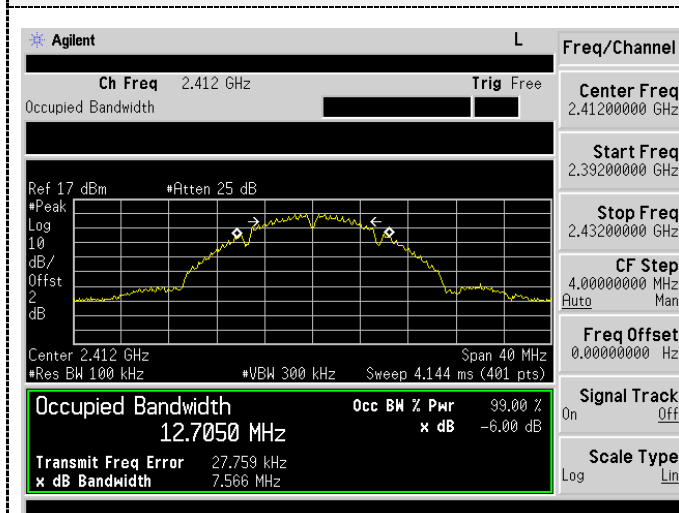


802.11g

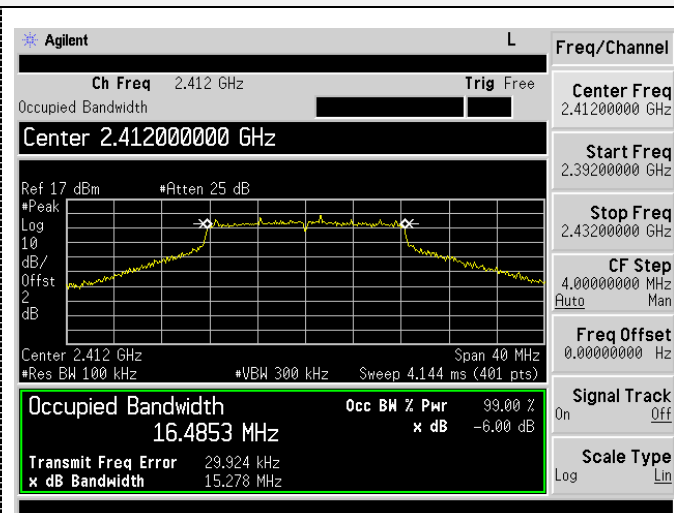


CH01

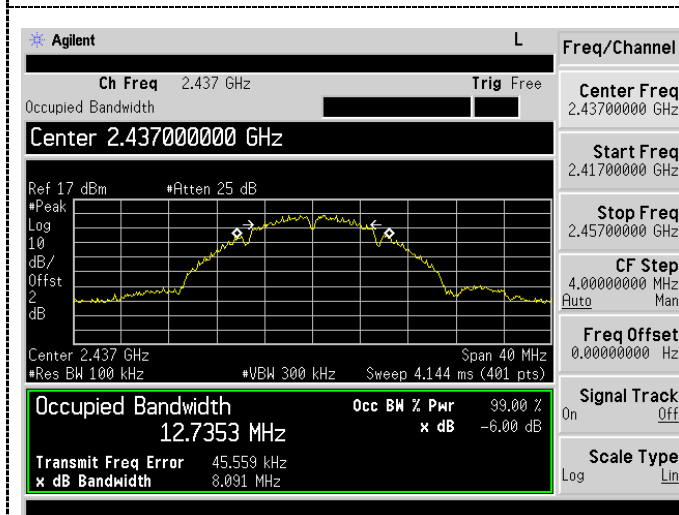


CH01

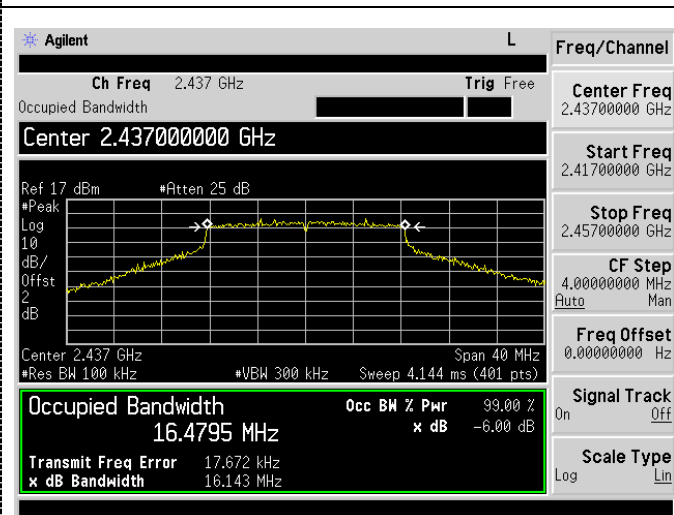

CH06

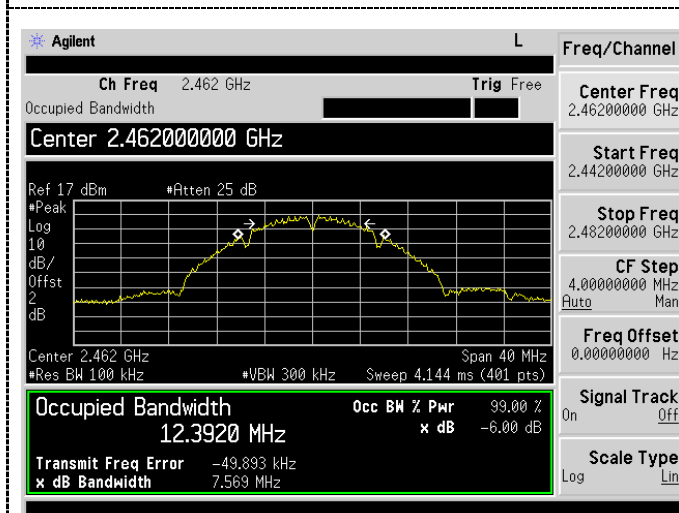


CH06

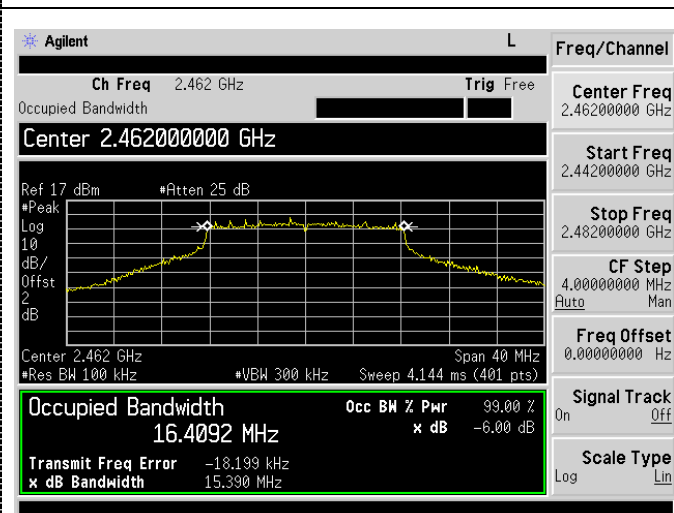


CH11

CH11


802.11n(HT20)

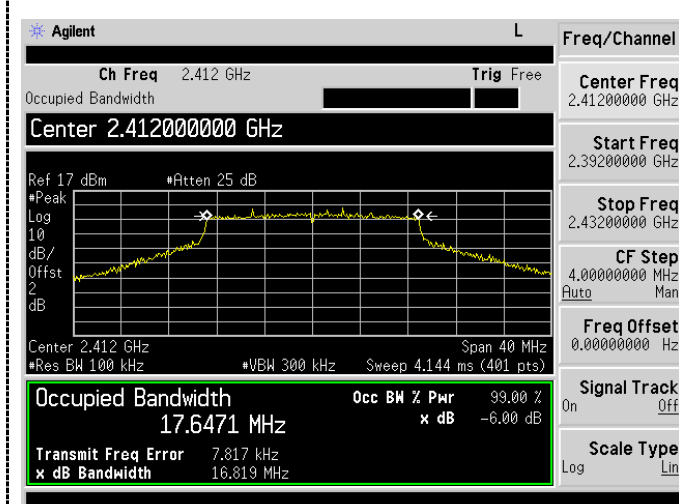


802.11n(HT40)

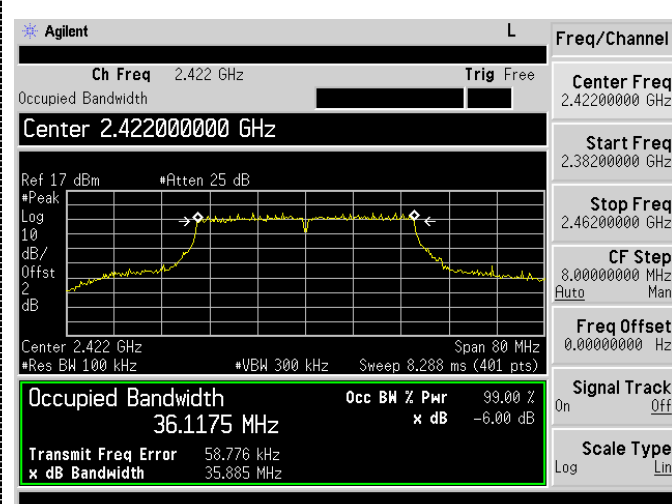


CH01

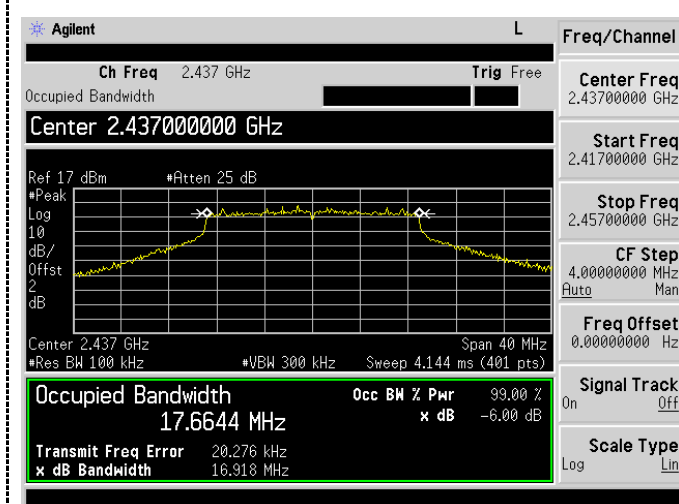


CH03

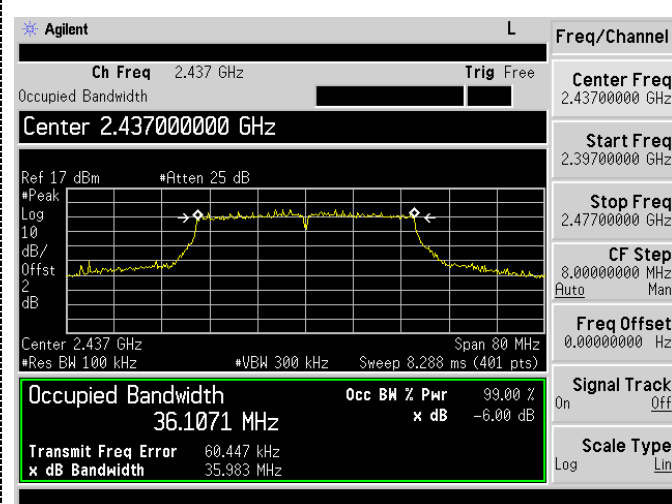

CH06

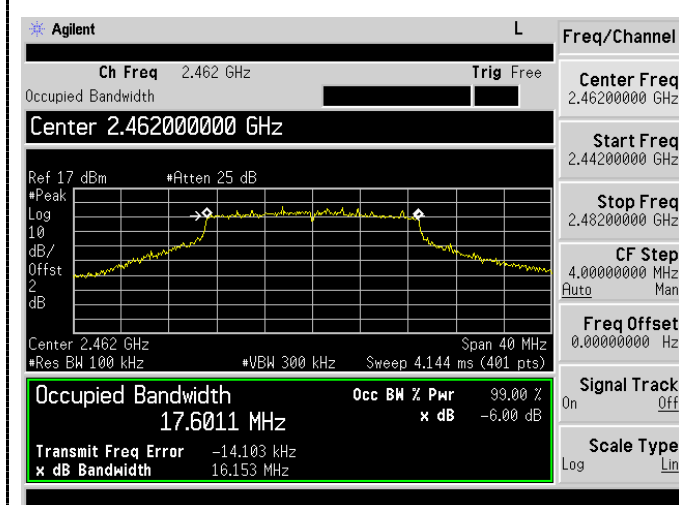

CH06

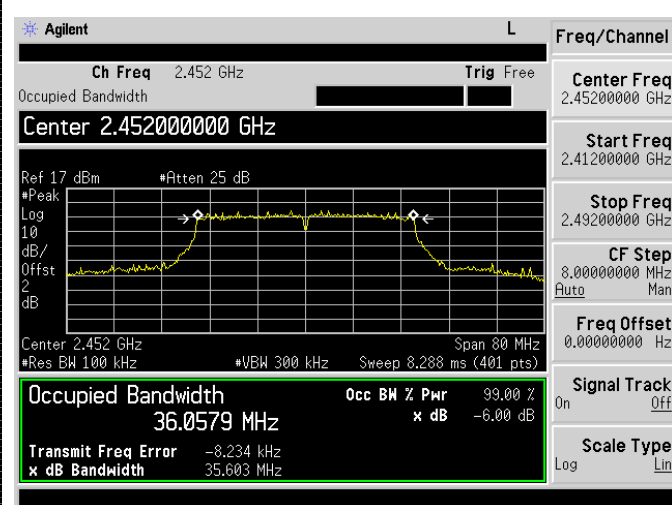

CH11

CH09

4.6 Out-of-band Emissions


Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.


Test Configuration




Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data. And record the worst data in the report.

Test plot as follows:

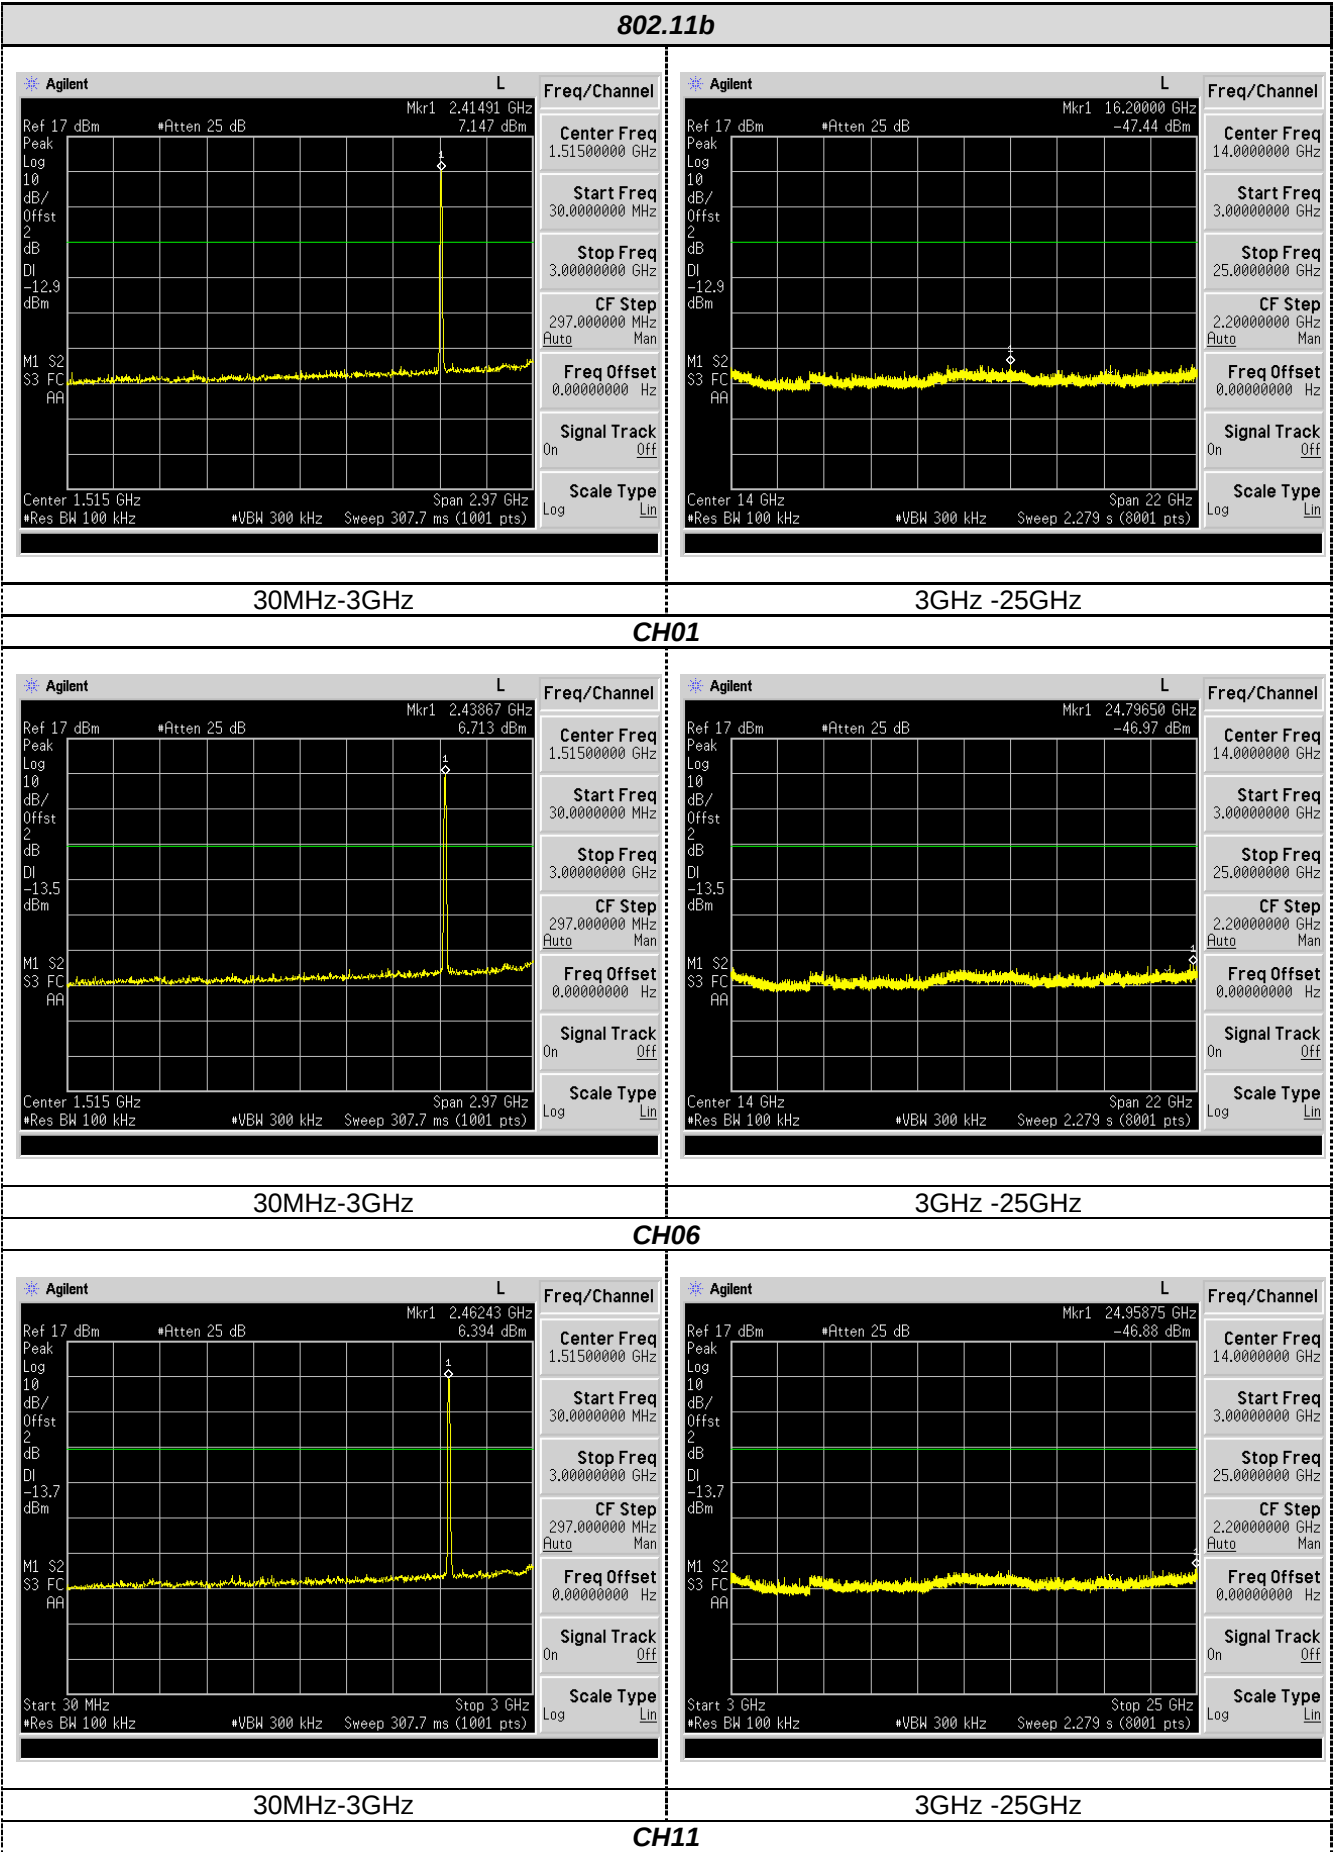

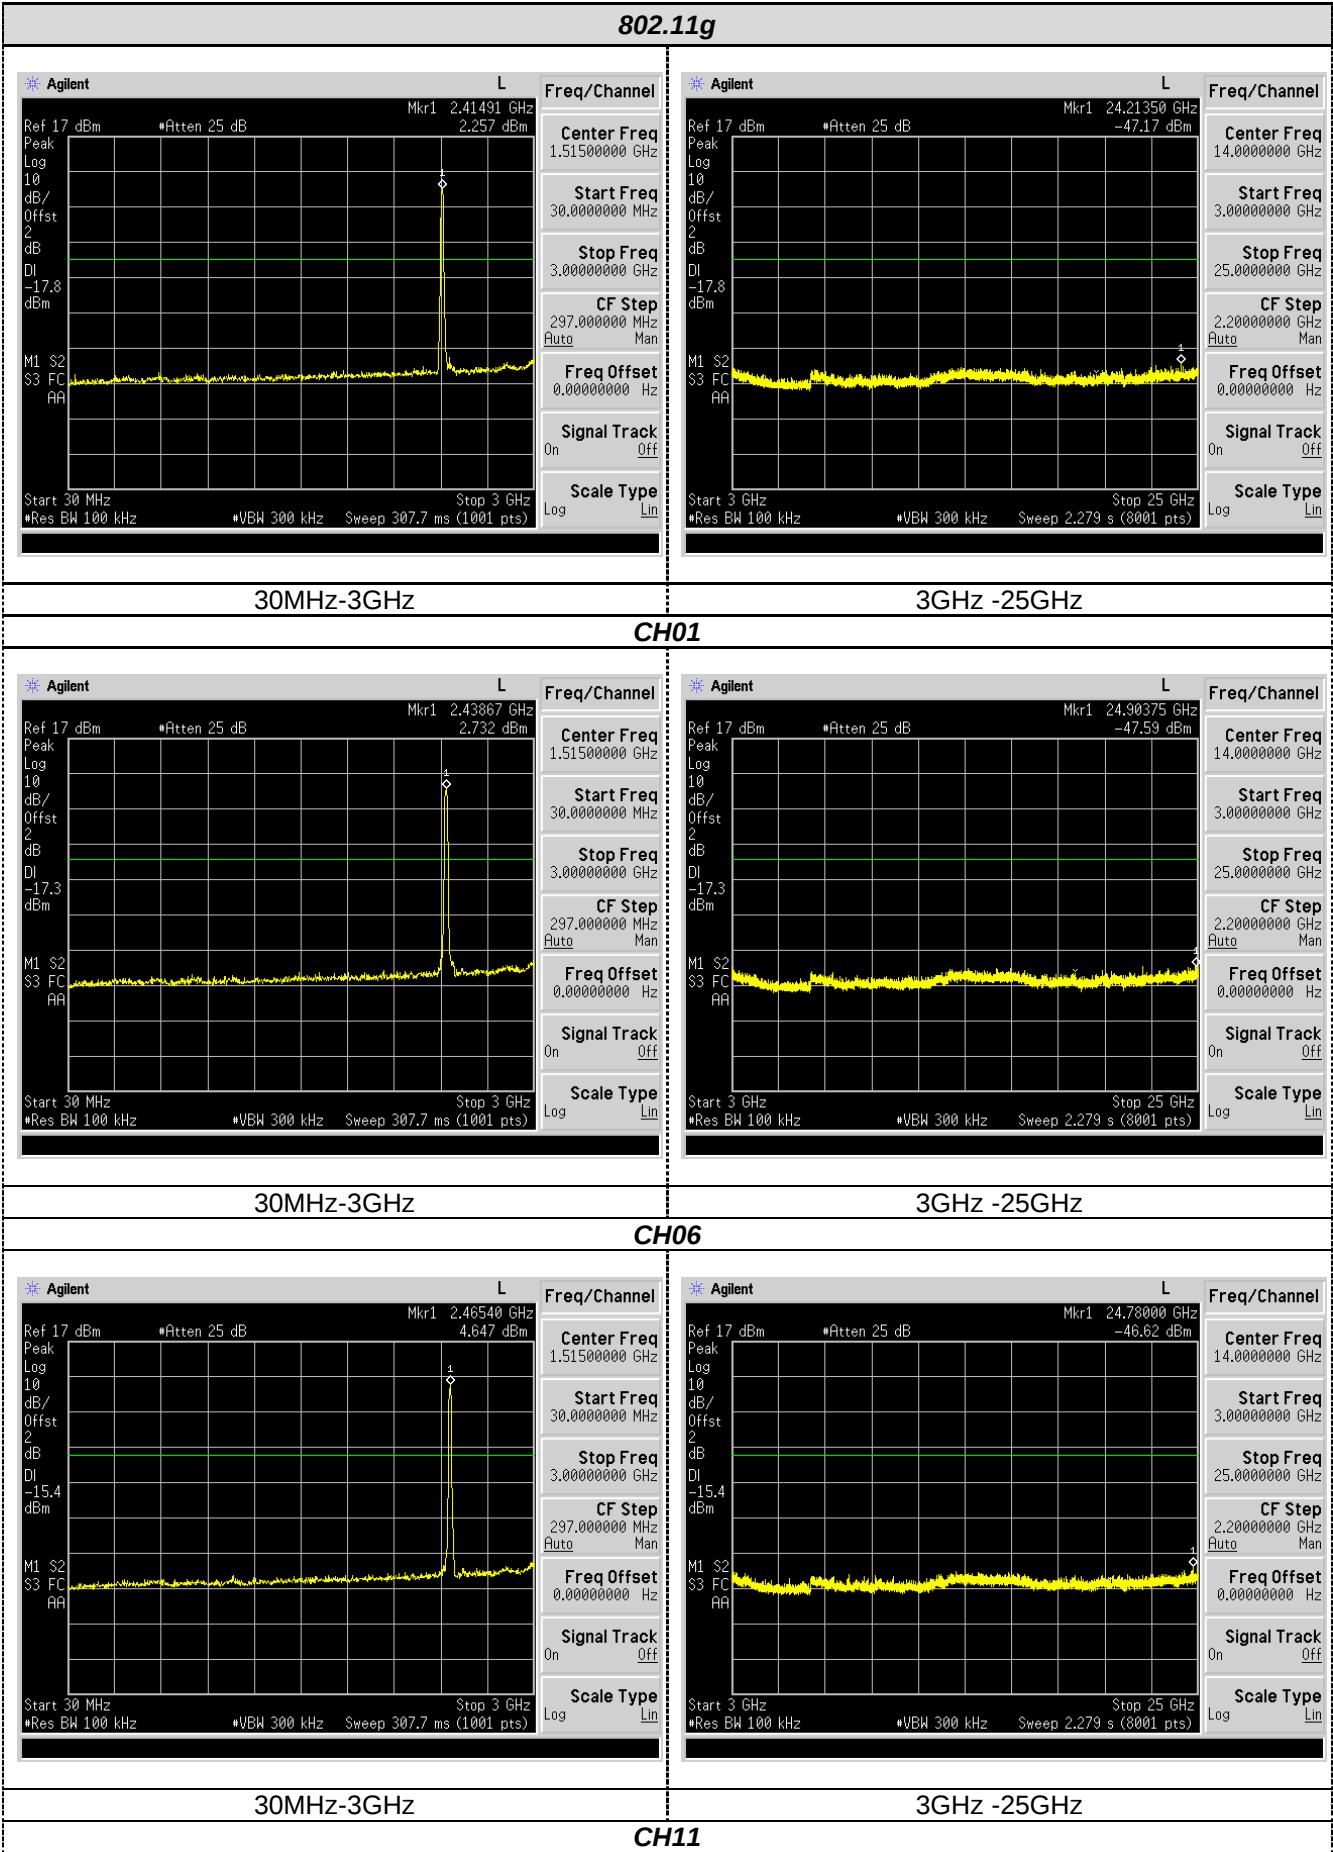

CH01

Agilent

L

Ref 17 dBm

Peak

Log

10

dB/

Offst

2

dB

DI

-17.3

dBm

M1 S2

S3 FC

AA

Mkr1 2.43867 GHz

2.732 dBm

Start 30 MHz

Stop 3 GHz

Res BW 100 kHz

VBW 300 kHz

Sweep 307.7 ms (1001 pts)

Freq/Channel

Center Freq

1.51500000 GHz

Start Freq

30.00000000 MHz

Stop Freq

3.000000000 GHz

CF Step

297.0000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Scale Type

Log

Lin

30MHz-3GHz

Agilent

L

Ref 17 dBm

Peak

Log

10

dB/

Offst

2

dB

DI

-17.3

dBm

M1 S2

S3 FC

AA

Mkr1 24.90375 GHz

-47.59 dBm

Start 3 GHz

Stop 25 GHz

Res BW 100 kHz

VBW 300 kHz

Sweep 2.279 s (8001 pts)

Freq/Channel

Center Freq

14.00000000 GHz

Start Freq

3.000000000 GHz

Stop Freq

25.00000000 GHz

CF Step

2.200000000 GHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Scale Type

Log

Lin

3GHz -25GHz

CH06

Agilent

L

Ref 17 dBm

Peak

Log

10

dB/

Offst

2

dB

DI

-15.4

dBm

M1 S2

S3 FC

AA

Mkr1 2.46540 GHz

4.647 dBm

Start 30 MHz

Stop 3 GHz

Res BW 100 kHz

VBW 300 kHz

Sweep 307.7 ms (1001 pts)

Freq/Channel

Center Freq

1.51500000 GHz

Start Freq

30.00000000 MHz

Stop Freq

3.000000000 GHz

CF Step

297.0000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Scale Type

Log

Lin

30MHz-3GHz

Agilent

L

Ref 17 dBm

Peak

Log

10

dB/

Offst

2

dB

DI

-15.4

dBm

M1 S2

S3 FC

AA

Mkr1 24.78000 GHz

-46.62 dBm

Start 3 GHz

Stop 25 GHz

Res BW 100 kHz

VBW 300 kHz

Sweep 2.279 s (8001 pts)

Freq/Channel

Center Freq

14.00000000 GHz

Start Freq

3.000000000 GHz

Stop Freq

25.00000000 GHz

CF Step

2.200000000 GHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off


Scale Type

Log

Lin

3GHz -25GHz

CH11

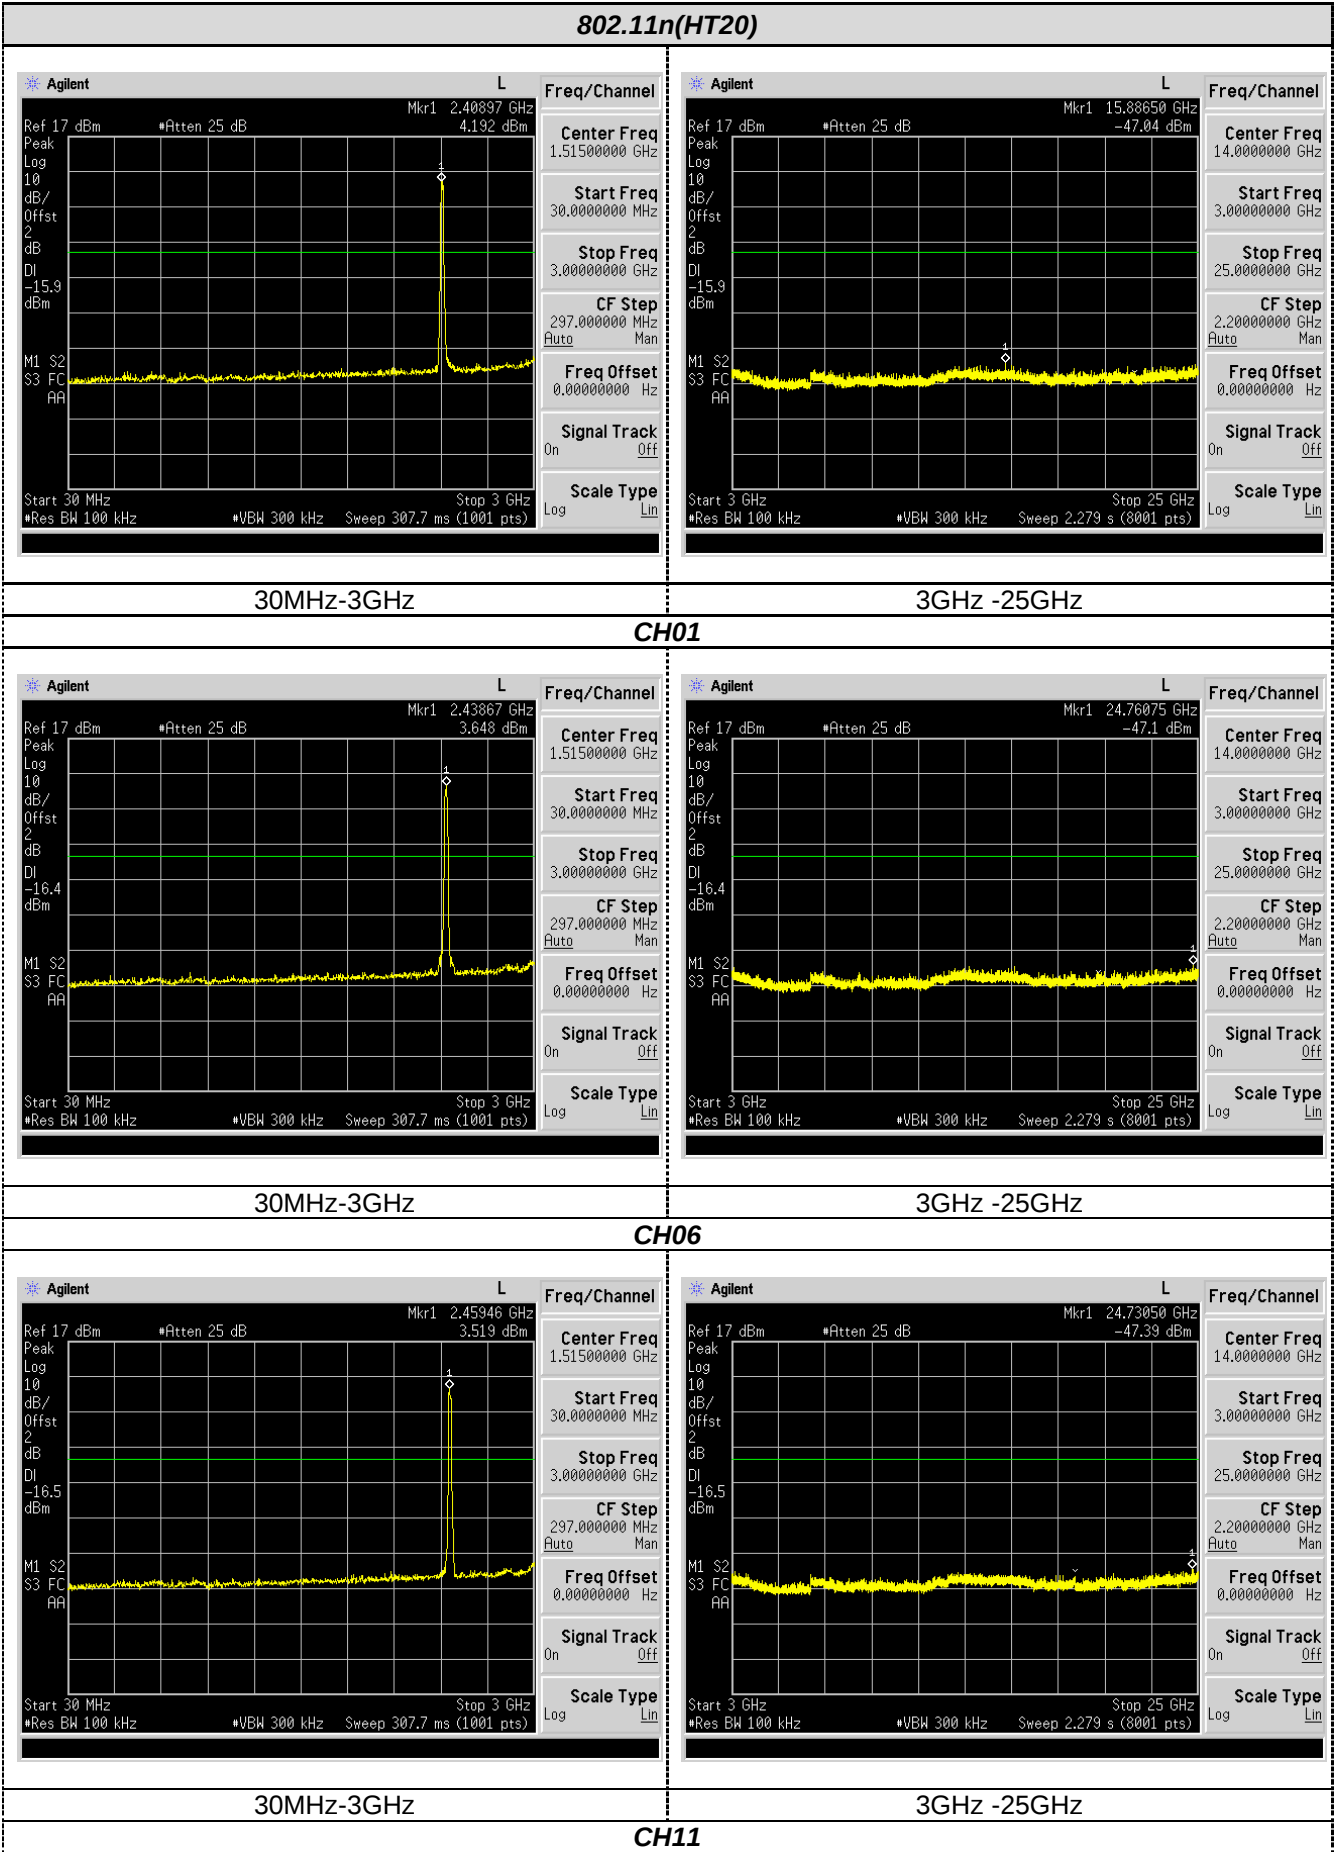

CH01

Agilent

L

Ref 17 dBm

Peak

Log

10

dB/

Offst

2

dB

DI

-16.4

dBm

M1 S2

S3 FC

AA

Start 30 MHz

Res BW 100 kHz

VBW 300 kHz

Sweep 307.7 ms (1001 pts)

Stop 3 GHz

Freq/Channel

Center Freq

1.51500000 GHz

Start Freq

30.00000000 MHz

Stop Freq

3.000000000 GHz

CF Step

297.0000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Scale Type

Log

Lin

30MHz-3GHz

Agilent

L

Ref 17 dBm

Peak

Log

10

dB/

Offst

2

dB

DI

-16.4

dBm

M1 S2

S3 FC

AA

Start 3 GHz

Res BW 100 kHz

VBW 300 kHz

Sweep 2.279 s (8001 pts)

Stop 25 GHz

Freq/Channel

Center Freq

14.00000000 GHz

Start Freq

3.000000000 GHz

Stop Freq

25.00000000 GHz

CF Step

2.200000000 GHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Scale Type

Log

Lin

3GHz -25GHz

CH06

Agilent

L

Ref 17 dBm

Peak

Log

10

dB/

Offst

2

dB

DI

-16.5

dBm

M1 S2

S3 FC

AA

Start 30 MHz

Res BW 100 kHz

VBW 300 kHz

Sweep 307.7 ms (1001 pts)

Stop 3 GHz

Freq/Channel

Center Freq

1.51500000 GHz

Start Freq

30.00000000 MHz

Stop Freq

3.000000000 GHz

CF Step

297.0000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Scale Type

Log

Lin

30MHz-3GHz

Agilent

L

Ref 17 dBm

Peak

Log

10

dB/

Offst

2

dB

DI

-16.5

dBm

M1 S2

S3 FC

AA

Start 3 GHz

Res BW 100 kHz

VBW 300 kHz

Sweep 2.279 s (8001 pts)

Stop 25 GHz

Freq/Channel

Center Freq

14.00000000 GHz

Start Freq

3.000000000 GHz

Stop Freq

25.00000000 GHz

CF Step

2.200000000 GHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Scale Type

Log

Lin

3GHz -25GHz

CH11

Agilent

L

Ref 17 dBm

Peak

Log

10

dB/

Offst

2

dB

DI

-16.5

dBm

M1 S2

S3 FC

AA

Start 30 MHz

Res BW 100 kHz

VBW 300 kHz

Sweep 307.7 ms (1001 pts)

Stop 3 GHz

Freq/Channel

Center Freq

1.51500000 GHz

Start Freq

30.00000000 MHz

Stop Freq

3.000000000 GHz

CF Step

297.0000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Scale Type

Log

Lin

30MHz-3GHz

Agilent

L

Ref 17 dBm

Peak

Log

10

dB/

Offst

2

dB

DI

-16.5

dBm

M1 S2

S3 FC

AA

Start 3 GHz

Res BW 100 kHz

VBW 300 kHz

Sweep 2.279 s (8001 pts)

Stop 25 GHz

Freq/Channel

Center Freq

14.00000000 GHz

Start Freq

3.000000000 GHz

Stop Freq

25.00000000 GHz

CF Step

2.200000000 GHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On


Off

Scale Type

Log

Lin

3GHz -25GHz

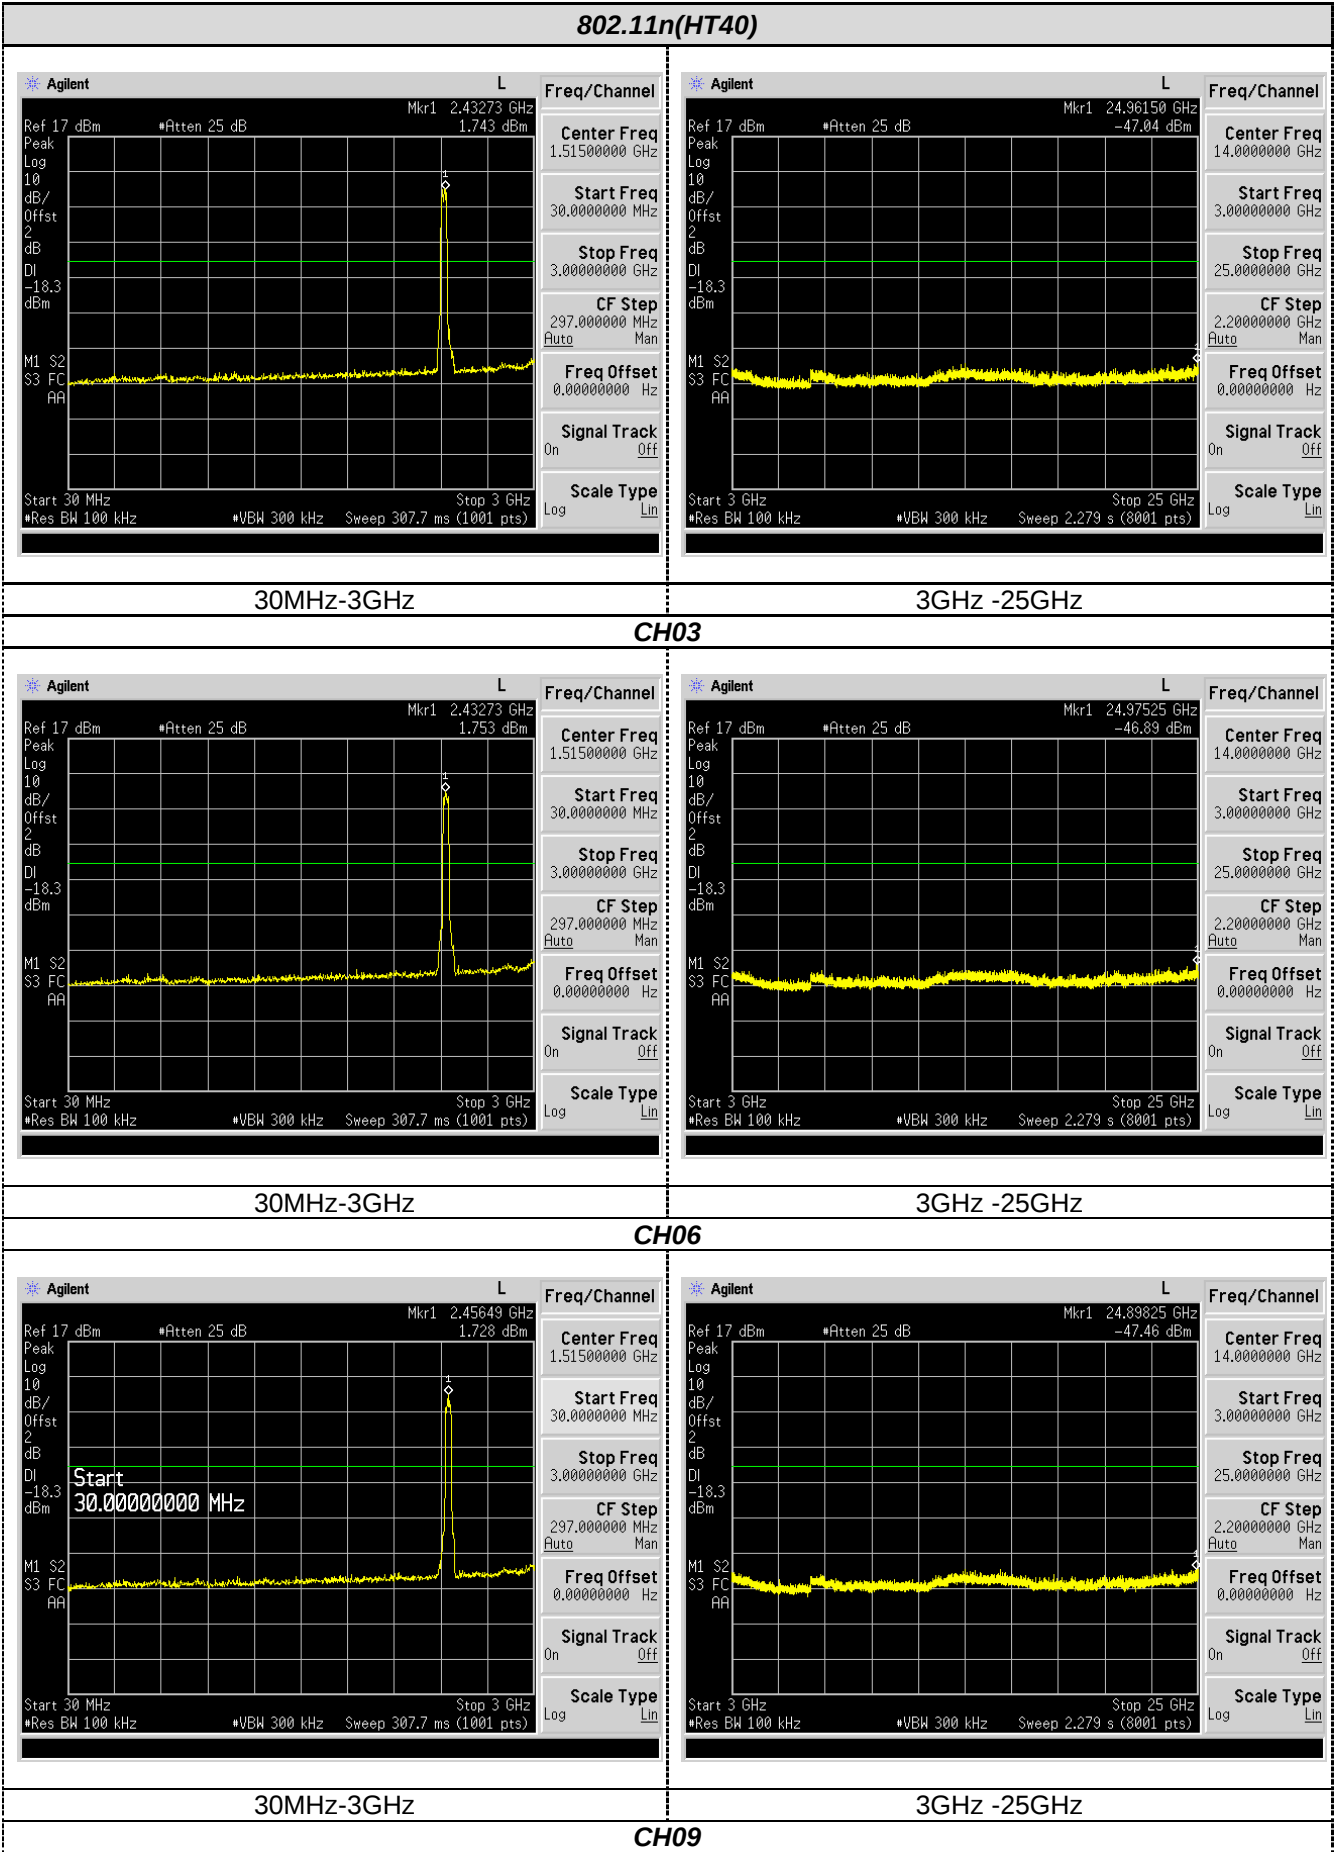

CH03

Agilent

L

Ref 17 dBm

Peak

Log

10

dB/

Offst

2

dB

DI

-18.3

dBm

M1 S2

S3 FC

AA

Mkr1 2.43273 GHz

1.753 dBm

Start 30 MHz

Stop 3 GHz

Res BW 100 kHz

VBW 300 kHz

Sweep 307.7 ms (1001 pts)

Freq/Channel

Center Freq

1.51500000 GHz

Start Freq

30.00000000 MHz

Stop Freq

3.000000000 GHz

CF Step

297.0000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Scale Type

Log

Lin

30MHz-3GHz

Agilent

L

Ref 17 dBm

Peak

Log

10

dB/

Offst

2

dB

DI

-18.3

dBm

M1 S2

S3 FC

AA

Mkr1 24.97525 GHz

-46.89 dBm

Start 3 GHz

Stop 25 GHz

Res BW 100 kHz

VBW 300 kHz

Sweep 2.279 s (8001 pts)

Freq/Channel

Center Freq

14.00000000 GHz

Start Freq

3.000000000 GHz

Stop Freq

25.00000000 GHz

CF Step

2.200000000 GHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Scale Type

Log

Lin

3GHz -25GHz

CH06

Agilent

L

Ref 17 dBm

Peak

Log

10

dB/

Offst

2

dB

DI

-18.3

dBm

M1 S2

S3 FC

AA

Mkr1 2.45649 GHz

1.728 dBm

Start 30.00000000 MHz

Stop 3 GHz

Res BW 100 kHz

VBW 300 kHz

Sweep 307.7 ms (1001 pts)

Freq/Channel

Center Freq

1.51500000 GHz

Start Freq

30.00000000 MHz

Stop Freq

3.000000000 GHz

CF Step

297.0000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Scale Type

Log

Lin

30MHz-3GHz

Agilent

L

Ref 17 dBm

Peak

Log

10

dB/

Offst

2

dB

DI

-18.3

dBm

M1 S2

S3 FC

AA

Mkr1 24.89825 GHz

-47.46 dBm

Start 3 GHz

Stop 25 GHz

Res BW 100 kHz

VBW 300 kHz

Sweep 2.279 s (8001 pts)

Freq/Channel

Center Freq

14.00000000 GHz

Start Freq

3.000000000 GHz

Stop Freq

25.00000000 GHz

CF Step

2.200000000 GHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off




Scale Type


Log

Lin

3GHz -25GHz

CH09

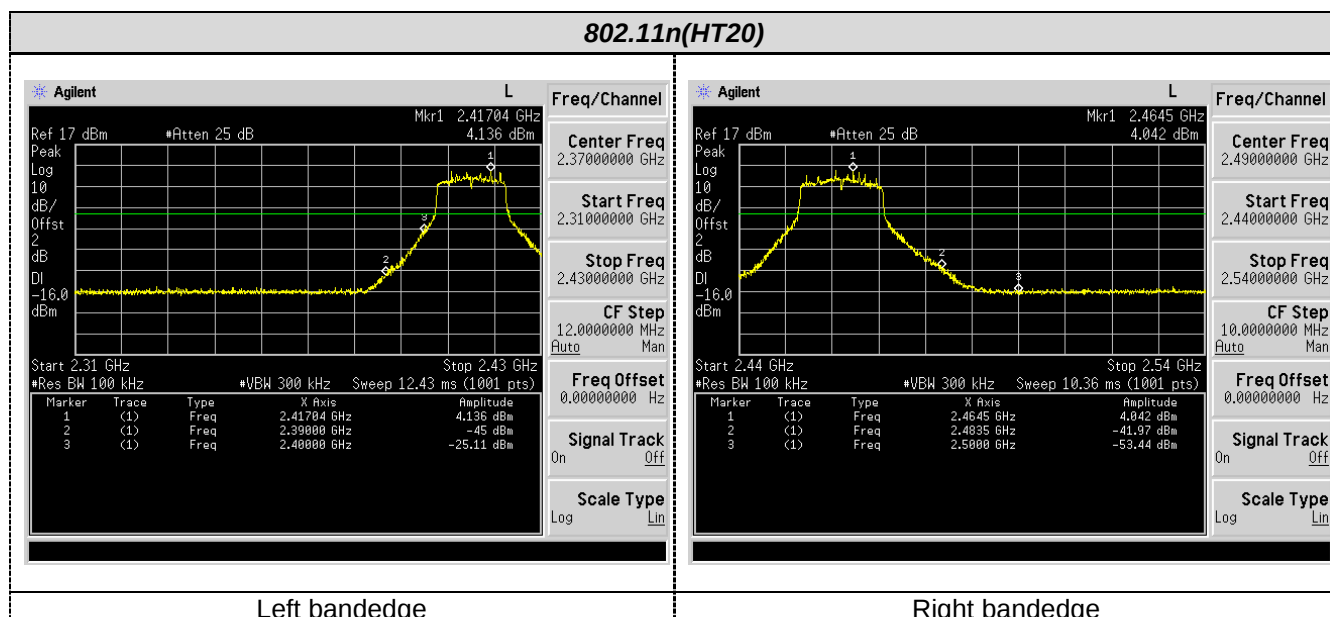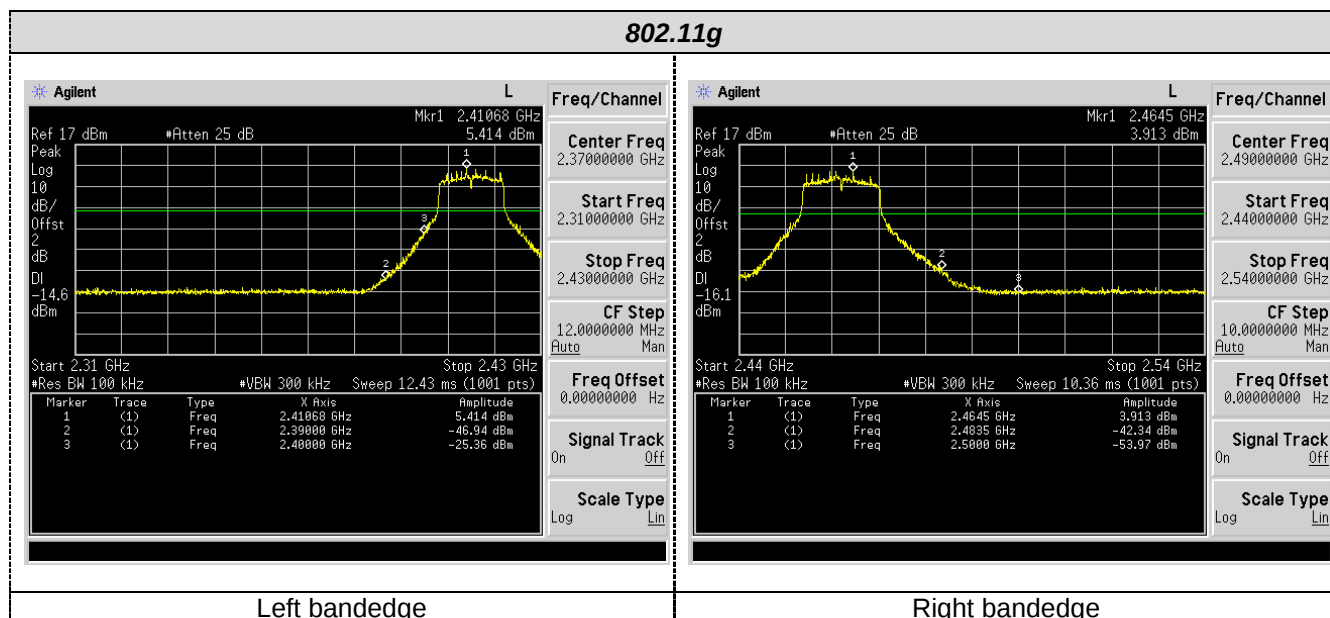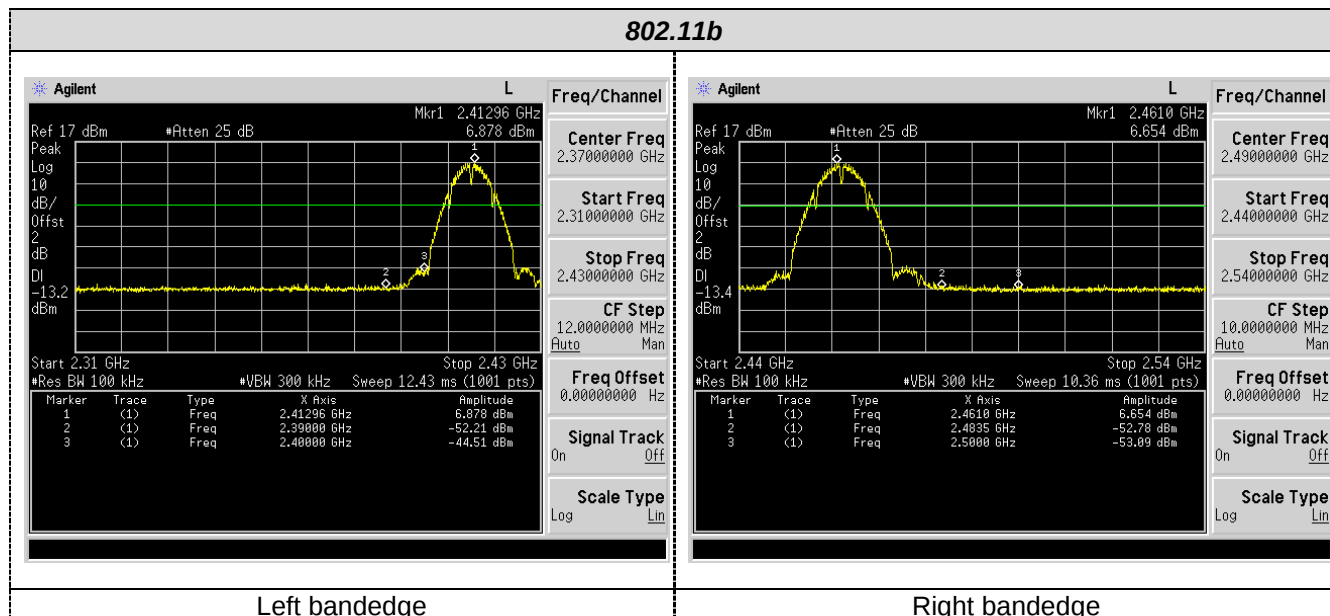Band-edge Measurements for RF Conducted Emissions:

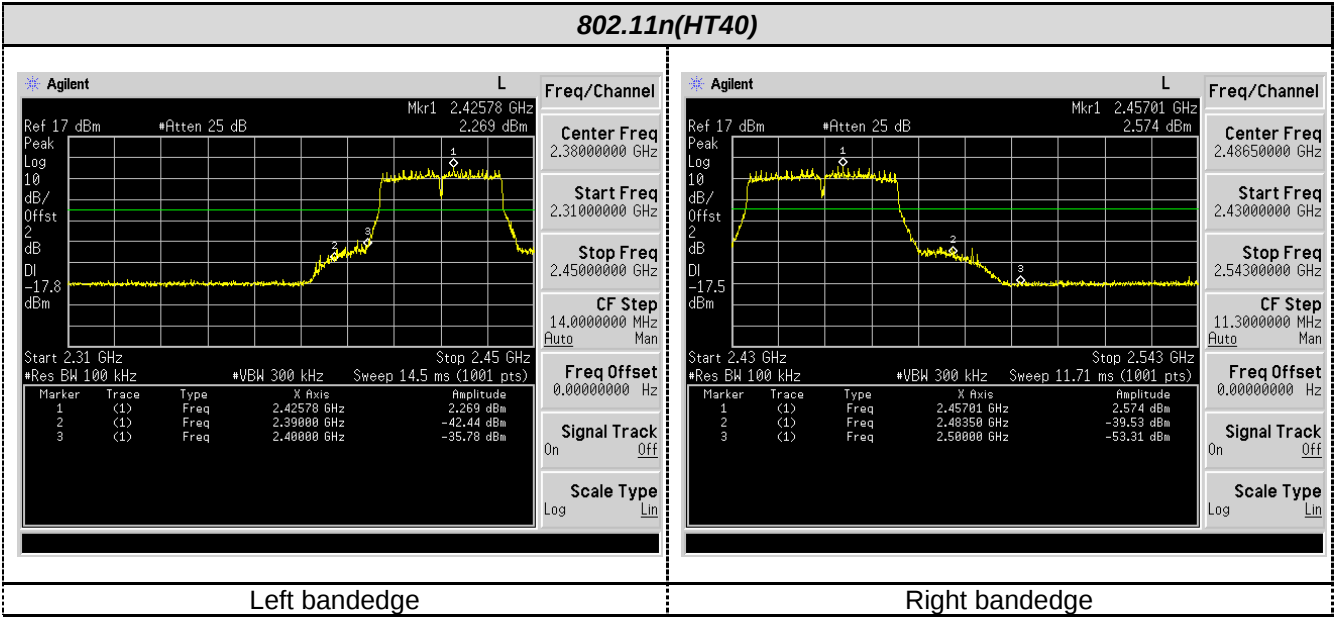

4.7 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited


FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result:

The maximum gain of antenna was 1.99 dBi for 2.4GHz WIFI.

5 Test Setup Photos of the EUT

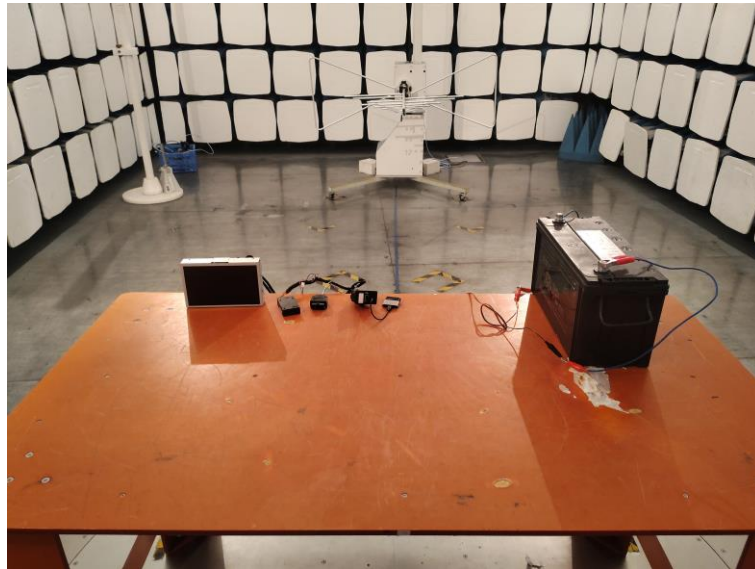

6 Photos of the EUT

Reference to the test report No. GTS20201124012-1-1

***** End of Report *****