

**TEST REPORT**

**Report Number: 102144943LEX-001**  
**Project Number: G102144943**

**Evaluation of Model Number: SENTRY1**

**Tested to the SAR Criteria in**  
**FCC Part 2.1093, RSS-102 Issue 5 per KDB 447498**

**For**

**CrossMatch Technologies Inc.**

Test Performed by:

Intertek  
731 Enterprise Drive  
Lexington, KY 40510

Test Authorized by:

CrossMatch Technologies Inc.  
3960 RCA Blvd Suite 6001  
Palm Beach Gardens, FL 33410


Prepared By:



Date: 8/15/2015

Bryan Taylor, Team Leader

Approved By:



Date: 8/15/2015

Jason Centers, Staff Engineer



*This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.*

**TABLE OF CONTENTS**

<b>1.0</b>	<b>INTRODUCTION.....</b>	<b>4</b>
	MODIFICATIONS MADE TO TEST SAMPLE .....	4
<b>2.0</b>	<b>TEST SITE DESCRIPTION.....</b>	<b>5</b>
	MEASUREMENT EQUIPMENT.....	6
	MEASUREMENT UNCERTAINTY .....	7
<b>3.0</b>	<b>JOB DESCRIPTION.....</b>	<b>9</b>
<b>4.0</b>	<b>SYSTEM VERIFICATION .....</b>	<b>10</b>
	SYSTEM VALIDATION.....	10
	TISSUE SIMULATING LIQUID DESCRIPTION AND VALIDATION .....	11
<b>5.0</b>	<b>EVALUATION PROCEDURES .....</b>	<b>12</b>
	TEST POSITIONS: .....	12
	REFERENCE POWER MEASUREMENT: .....	12
	AREA SCAN: .....	12
	ZOOM SCAN: .....	12
	INTERPOLATION, EXTRAPOLATION AND DETECTION OF MAXIMA:.....	14
	POWER DRIFT MEASUREMENT: .....	15
	RF AMBIENT ACTIVITY:.....	15
<b>6.0</b>	<b>CRITERIA.....</b>	<b>16</b>
<b>7.0</b>	<b>TEST CONFIGURATION.....</b>	<b>16</b>
<b>8.0</b>	<b>TEST RESULTS .....</b>	<b>18</b>
	SIMULTANEOUS TRANSMISSION CALCULATIONS:.....	19
	SAR TEST EXCLUSIONS: .....	19
<b>9.0</b>	<b>REFERENCES.....</b>	<b>20</b>
<b>10.0</b>	<b>APPENDIX – WORST CASE SAR PLOTS.....</b>	<b>21</b>
<b>11.0</b>	<b>.....</b>	<b>29</b>
<b>12.0</b>	<b>APPENDIX – DIPOLE VALIDATION PLOTS .....</b>	<b>39</b>
<b>13.0</b>	<b>APPENDIX – DESCRIPTION OF THE PHANTOMS USED FOR TESTING .....</b>	<b>43</b>
<b>14.0</b>	<b>APPENDIX – SYSTEM VALIDATION SUMMARY .....</b>	<b>45</b>

Evaluation For:CrossMatch Technologies Inc.

Model Number: SENTRY1  
Report Number: 102144943LEX-001**DOCUMENT HISTORY**

<b>Revision/ Project Number</b>	<b>Writer Initials</b>	<b>Date</b>	<b>Change</b>
1.0 /G102144943	BCT	8/15/2015	Original document

## 1.0 INTRODUCTION

At the request of CrossMatch Technologies Inc., the Verifier Sentry was evaluated for SAR in accordance with the requirements for FCC Part 2.1093 and RSS-102. Testing was performed in accordance with IEEE Std 1528:2013, IEC62209-2:2010, and the Office of Engineering and Technology KDB 447498. Testing was performed at the Intertek facility in Lexington, Kentucky.

For the evaluation, the dosimetric assessment system DASY52 was used. The total uncertainty for the evaluation of the spatial peak SAR values averaged over a cube of 1g tissue mass had been assessed for this system to be  $\pm 22.3\%$ .

The SENTRY1 was tested at the maximum output power measured by Intertek. Maximum output power measurements are tabulated under Section 8.0 Test Results.

The maximum spatial peak SAR value for the sample device averaged over 1g was found to be:

Transmit Band (MHz)	Mode	Channel	Frequency (MHz)	Conducted Output Power (dBm)	Reported SAR <sub>1g</sub> – Body Mode (W/kg)	Limit (W/kg)
1850-1910	CDMA PCS Band BC1	1175	1908.75	23.53	0.89	1.6W/kg
824-849	CDMA Cell Band BC0	384	836.52	23.42	0.34	1.6W/kg

Table 1: Maximum Measured SAR

Based on the worst-case data presented above, the Verifier Sentry was found to be **compliant** with the 1.6 W/kg requirement for general population / uncontrolled exposure.

### Modifications made to test sample

Intertek implemented no modifications.

## 2.0 TEST SITE DESCRIPTION

The SAR test site located at 731 Enterprise Drive, Lexington KY 40510 is comprised of the SPEAG model DASY 5.2 automated near-field scanning system, which is a package, optimized for dosimetric evaluation of mobile radios [3]. This system is installed in an ambient-free shielded chamber. The ambient temperature is controlled to  $22.0 \pm 2^{\circ}\text{C}$ . During the SAR evaluations, the RF ambient conditions are monitored continuously for signals that might interfere with the test results. The tissue simulating liquid is also stored in this area in order to keep it at the same constant ambient temperature as the room.

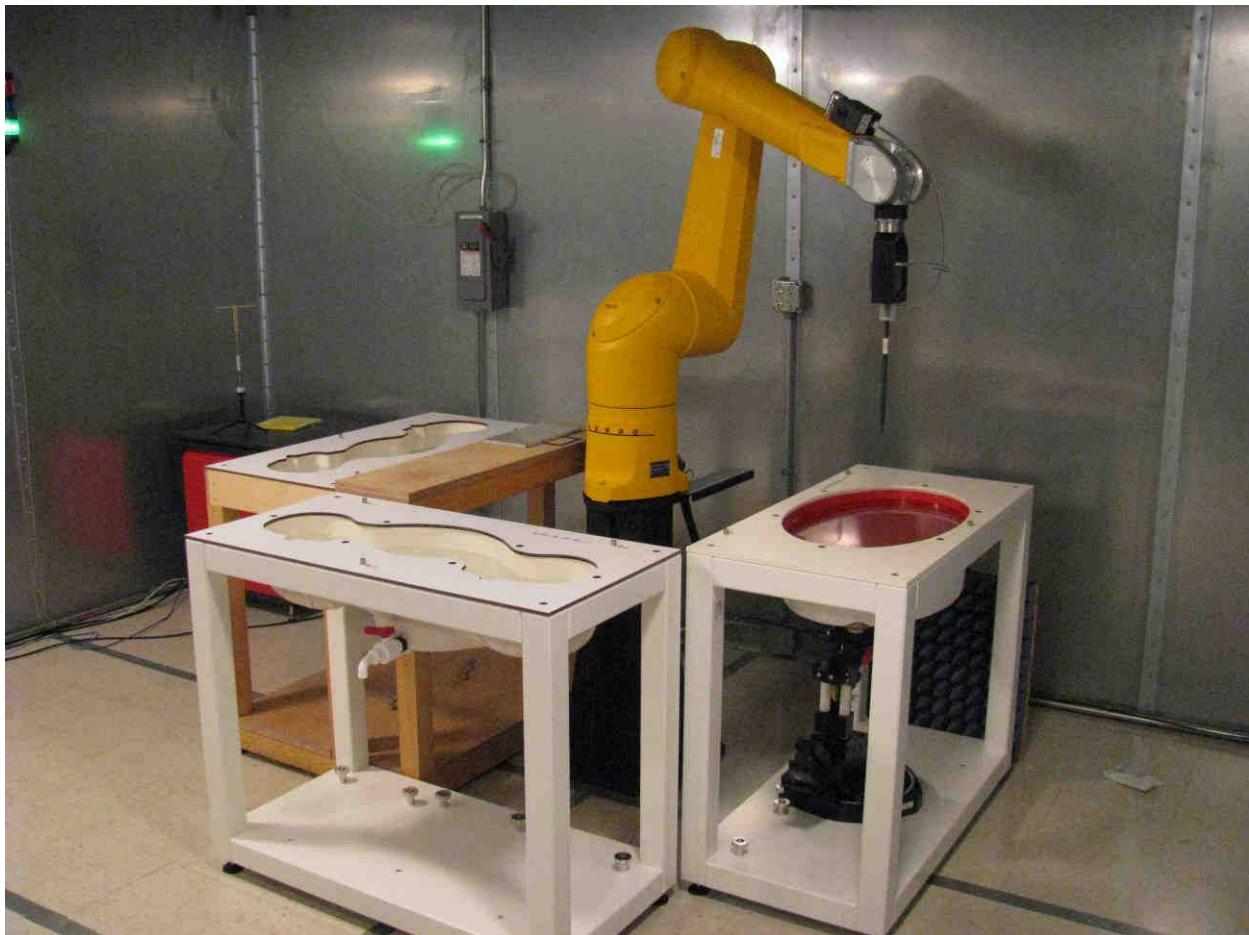


Figure 1: Intertek SAR Test Site

Evaluation For: CrossMatch Technologies Inc.

Model Number: SENTRY1  
Report Number: 102144943LEX-001**Measurement Equipment**

The following major equipment/components were used for the SAR evaluation:

Description	Serial Number	Manufacture	Model	Cal. Date	Cal. Due	Eq. Used
SAR Probe	3516	Speag	EXDV3	12/12/14	12/12/15	<input checked="" type="checkbox"/>
System Verification Dipole	4d122	Speag	D835V2	9/9/14	9/9/15	<input checked="" type="checkbox"/>
System Verification Dipole	5d154	Speag	D1900V2	9/11/14	9/11/15	<input checked="" type="checkbox"/>
System Verification Dipole	718	Speag	D2450V2	12/8/14	12/8/15	<input type="checkbox"/>
DAE	358	Speag	DAE4	9/16/14	9/16/15	<input checked="" type="checkbox"/>
Vector Signal Generator	257708	Rohde & Schwarz	SMBV100A	9/20/14	9/20/15	<input checked="" type="checkbox"/>
Network Analyzer	US391739 83	Agilent	8753ES	3/18/15	3/18/16	<input checked="" type="checkbox"/>
USB Power Sensor	100155	Rohde & Schwarz	NRP-Z81	9/16/14	9/16/15	<input checked="" type="checkbox"/>
USB Power Sensor	100705	Rohde & Schwarz	NRP-Z51	9/16/14	9/16/15	<input checked="" type="checkbox"/>
Dielectric Probe Kit	1111	Speag	DAK-3.5	8/12/14	8/12/15	<input checked="" type="checkbox"/>
Spectrum Analyzer	3099	Rohde & Schwarz	FSP7	9/15/14	9/15/15	<input checked="" type="checkbox"/>
Base Station Simulator	119981	Rohde & Schwarz	CMU200	9/18/14	9/18/15	<input checked="" type="checkbox"/>
SAM Twin Phantom	1663	Speag	QD 000 P40 C	NCR	NCR	<input checked="" type="checkbox"/>
Oval Flat Phantom ELI 5.0	1108	Speag	QD OVA 002 A	NCR	NCR	<input checked="" type="checkbox"/>
6-axis robot	F11/5H1Y A/A/01	Staubli	RX-90	NCR	NCR	<input checked="" type="checkbox"/>

NCR – No Calibration Required

Table 2: Test Equipment Used for SAR Evaluation

**Measurement Uncertainty**

The Table below includes the uncertainty budget suggested by the IEEE Std 1528-2013 and determined by SPEAG for the DASY5 measurement System.

Error Description	Uncertainty Value	Prob. Dist.	Div.	$c_i(1g)$	$c_i(10g)$	Std.Unc. (1g)	Std.Unc. (10g)	$(v_i)_{v_{eff}}$
<b>Measurement System</b>								
Probe Calibration	±6.0%	N	1	1	1	±6.0%	±6.0%	∞
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effect	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Modulation Response	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%	∞
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%	∞
RF Ambient Noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
RF Ambient Reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Probe Positioner	±0.4%	R	$\sqrt{3}$	1	1	±0.2%	±0.2%	∞
Probe Positioning	±2.9%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Max. SAR Eval.	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%	∞
<b>Test sample Related</b>								
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%	∞
Power Scaling	±0.0%	R	$\sqrt{3}$	1	1	±0%	±0%	∞
<b>Phantom and Setup</b>								
Phantom Uncertainty	±6.1%	R	$\sqrt{3}$	1	1	±3.5%	±3.5%	∞
SAR Correction	±1.9%	R	$\sqrt{3}$	1	0.84	±1.1%	±0.9%	∞
Liquid Conductivity (mea.)	±2.5%	R	$\sqrt{3}$	0.78	0.71	±1.1%	±1.0%	∞
Liquid Permittivity(mea.)	±2.5%	R	$\sqrt{3}$	0.26	0.26	±0.3%	±0.4%	∞
Temp unc. - Conductivity	±3.4%	R	$\sqrt{3}$	0.78	0.71	±1.5%	±1.4%	∞
Temp unc. - Permittivity	±0.4%	R	$\sqrt{3}$	0.23	0.26	±0.1%	±0.1%	∞
<b>Combined Standard Uncertainty</b>						±11.2%	±11.1%	361
<b>Expanded STD Uncertainty</b>						±22.3%	±22.2%	

Notes.

1. Worst Case uncertainty budget for DASY5 assessed according to IEEE 1528-2013. The budget is valid for the frequency range 300 MHz – 3 GHz and represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerably smaller.

Error Description	Uncertainty Value	Prob. Dist.	Div.	$c_i(1g)$	$c_i(10g)$	Std.Unc. (1g)	Std.Unc. (10g)	$(v_i)_{V_{eff}}$
<b>Measurement System</b>								
Probe Calibration	$\pm 6.55\%$	N	1	1	1	$\pm 6.55\%$	$\pm 6.55\%$	$\infty$
Axial Isotropy	$\pm 4.7\%$	R	$\sqrt{3}$	0.7	0.7	$\pm 1.9\%$	$\pm 1.9\%$	$\infty$
Hemispherical Isotropy	$\pm 9.6\%$	R	$\sqrt{3}$	0.7	0.7	$\pm 3.9\%$	$\pm 3.9\%$	$\infty$
Boundary Effect	$\pm 2.0\%$	R	$\sqrt{3}$	1	1	$\pm 1.2\%$	$\pm 1.2\%$	$\infty$
Linearity	$\pm 4.7\%$	R	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	$\infty$
System Detection Limits	$\pm 1.0\%$	R	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	$\infty$
Modulation Response	$\pm 2.4\%$	R	$\sqrt{3}$	1	1	$\pm 1.4\%$	$\pm 1.4\%$	$\infty$
Readout Electronics	$\pm 0.3\%$	N	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	$\infty$
Response Time	$\pm 0.8\%$	R	$\sqrt{3}$	1	1	$\pm 0.5\%$	$\pm 0.5\%$	$\infty$
Integration Time	$\pm 2.6\%$	R	$\sqrt{3}$	1	1	$\pm 1.5\%$	$\pm 1.5\%$	$\infty$
RF Ambient Noise	$\pm 3.0\%$	R	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	$\infty$
RF Ambient Reflections	$\pm 3.0\%$	R	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	$\infty$
Probe Positioner	$\pm 0.8\%$	R	$\sqrt{3}$	1	1	$\pm 0.5\%$	$\pm 0.5\%$	$\infty$
Probe Positioning	$\pm 6.7\%$	R	$\sqrt{3}$	1	1	$\pm 3.9\%$	$\pm 3.9\%$	$\infty$
Max. SAR Eval.	$\pm 4.0\%$	R	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	$\infty$
<b>Test sample Related</b>								
Device Positioning	$\pm 2.9\%$	N	1	1	1	$\pm 2.9\%$	$\pm 2.9\%$	145
Device Holder	$\pm 3.6\%$	N	1	1	1	$\pm 3.6\%$	$\pm 3.6\%$	5
Power Drift	$\pm 5.0\%$	R	$\sqrt{3}$	1	1	$\pm 2.9\%$	$\pm 2.9\%$	$\infty$
Power Scaling	$\pm 0.0\%$	R	$\sqrt{3}$	1	1	$\pm 0\%$	$\pm 0\%$	$\infty$
<b>Phantom and Setup</b>								
Phantom Uncertainty	$\pm 6.6\%$	R	$\sqrt{3}$	1	1	$\pm 3.8\%$	$\pm 3.8\%$	$\infty$
SAR Correction	$\pm 1.9\%$	R	$\sqrt{3}$	1	0.84	$\pm 1.1\%$	$\pm 0.9\%$	$\infty$
Liquid Conductivity (mea.)	$\pm 2.5\%$	R	$\sqrt{3}$	0.78	0.71	$\pm 1.1\%$	$\pm 1.0\%$	$\infty$
Liquid Permittivity(mea.)	$\pm 2.5\%$	R	$\sqrt{3}$	0.26	0.26	$\pm 0.3\%$	$\pm 0.4\%$	$\infty$
Temp unc. - Conductivity	$\pm 3.4\%$	R	$\sqrt{3}$	0.78	0.71	$\pm 1.5\%$	$\pm 1.4\%$	$\infty$
Temp unc. - Permittivity	$\pm 0.4\%$	R	$\sqrt{3}$	0.23	0.26	$\pm 0.1\%$	$\pm 0.1\%$	$\infty$
<b>Combined Standard Uncertainty</b>						$\pm 12.3\%$	$\pm 12.2\%$	748
<b>Expanded STD Uncertainty</b>						$\pm 24.6\%$	$\pm 24.5\%$	

Notes.

Worst Case uncertainty budget for DASY5 assessed according to IEEE 1528-2013. The budget is valid for the frequency range 3 GHz – 6 GHz and represents a worst-case analysis. Probe calibration error reflects uncertainty of the EX3D probe. For specific tests and configurations, the uncertainty could be considerably smaller.

### 3.0 JOB DESCRIPTION

At the request of CrossMatch Technologies Inc., SAR testing was performed on the SENTRY1.

Test sample	
<b>Manufacturer</b>	CrossMatch Technologies Inc.
<b>Model Number</b>	SENTRY1
<b>Serial Number</b>	Test Sample 1
<b>Receive Date</b>	6/20/2015
<b>Device Received Condition</b>	Good
<b>Device Category</b>	Portable
<b>RF Exposure Category</b>	General Population/Uncontrolled Environment
<b>Antenna Type</b>	Internal
Test sample Accessories	
<b>Accessory</b>	Holster

Table 3: Product Information

Operating Bands	Frequency Range (MHz)	Nominal Output Power (± Tolerance)	Duty Cycle
CDMA Cell	824.2 – 848.31MHz	24dBm (+0.5/-1dB)	1:1
CDMA PCS	1851.25 – 1908.75MHz	24dBm (+0.5/-1dB)	1:1

Table 4: Operating Bands

## 4.0 SYSTEM VERIFICATION

### System Validation

Prior to the assessment, the system was verified to be within  $\pm 10\%$  of the specifications by using the system validation kit. The system validation procedure tests the system against reference SAR values and the performance of probe, readout electronics and software. The test setup utilizes a phantom and reference dipole. The results from the system verifications with a dipole are shown in *Table 5*.

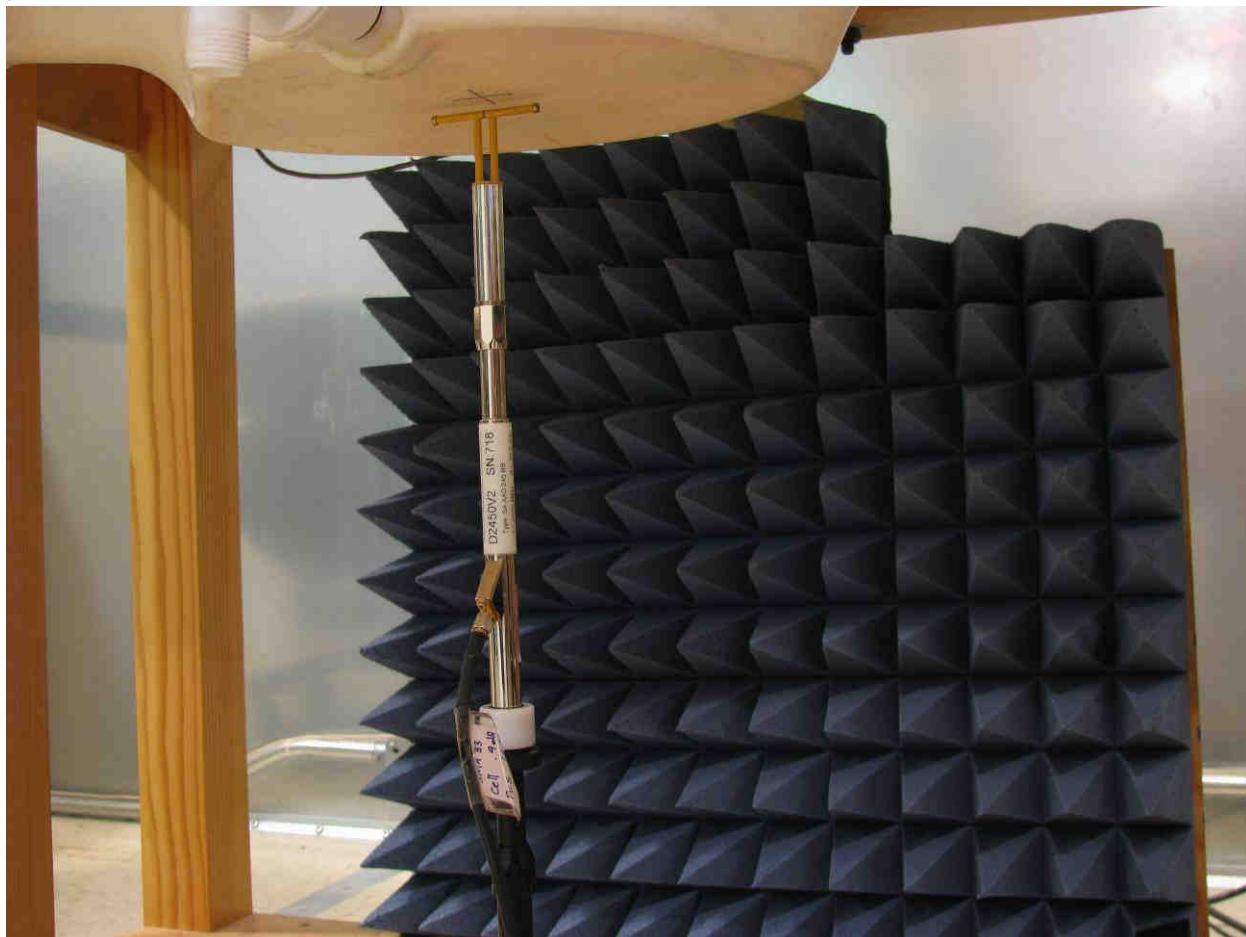


Figure 2: System Verification Setup

Reference Dipole Validation												
Ambient Temp (°C)	Fluid Temp (°C)	Frequency (MHz)	Dipole	Fluid Type	Dipole Power Input	Cal. Lab SAR (1g)	Cal. Lab SAR (10g)	Measured SAR (1g)	Measured SAR (10g)	% Error SAR (1g)	% Error SAR (10g)	Date
23.3	22.8	1900	D1900V2	MSL1900	1W	41.1	21.5	43.2	22.5	5.11	4.65	6/29/2015
23.4	22.5	835	D835V2	MSL 835	1W	9.41	6.16	9.93	6.53	5.53	6.01	6/29/2015

Table 5: Dipole Validations

**Tissue Simulating Liquid Description and Validation**

The dielectric parameters were verified to be within 5% of the target values prior to assessment. The dielectric parameters ( $\epsilon_r$ ,  $\sigma$ ) are shown in Table 6. A recipe for the tissue simulating fluid used is shown in Table 7.

Measured Tissue Properties									
Tissue Type	Frequency Measure (MHz)	Permittivity Target	Conductivity Target	Permittivity Measure	Complex Permittivity	Conductivity Measure	Dielectric % Deviation	Conductivity % Deviation	Date
MSL835	824	55.2	0.97	53.11	21.24	0.97	3.79	0.31	6/29/2015
	836	55.2	0.97	52.62	21.2	0.99	4.67	1.58	6/29/2015
	850	55.2	0.98	52.57	21.15	1.00	4.76	1.99	6/29/2015

Measured Tissue Properties									
Tissue Type	Frequency Measure (MHz)	Permittivity Target	Conductivity Target	Permittivity Measure	Complex Permittivity	Conductivity Measure	Dielectric % Deviation	Conductivity % Deviation	Date
MSL1900	1850	53.3	1.52	51.2	14.81	1.52	3.94	0.21	6/29/2015
	1880	53.3	1.52	50.92	14.86	1.55	4.47	2.18	6/29/2015
	1910	53.3	1.52	50.89	14.9	1.58	4.52	4.09	6/29/2015

Table 6: Dielectric Parameter Validations

TYPICAL COMPOSITION OF INGREDIENTS FOR LIQUID TISSUE PHANTOMS. (450MHz to 2450 MHz data only)												
Ingredient (% by weight)	f (MHz)											
	450		835		915		1900		2450		5500	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56	54.9	70.45	62.7	68.64	65.53	78.67
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.36	0.5	0	0	0
Sugar	56.32	46.78	56	45	56.5	41.76	0	0	0	0	0	0
HEC	0.98	0.52	1	1	1	1.21	0	0	0	0	0	0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0	0	0	0	0	0
Triton X-100	0	0	0	0	0	0	0	0	36.8	0	17.235	10.665
DGBE	0	0	0	0	0	0	44.92	29.18	0	31.37	0	0
DGHE	0	0	0	0	0	0	0	0	0	0	17.235	10.665
Dielectric Constant	43.42	58	42.54	56.1	42	56.8	39.9	53.3	39.8	52.7		
Conductivity (S/m)	0.85	0.83	0.91	0.95	1	1.07	1.42	1.52	1.88	1.95		

Table 7: Tissue Simulating Fluid Recipe

Tissue Simulating Liquid for 5GHz, MBBL3500-5800V5 Manufactured by SPEAG (proprietary mixture)

Ingredients	(% by weight)
Water	78
Mineral oil	11
Emulsifiers	9
Additives and Salt	2

## **5.0 EVALUATION PROCEDURES**

Prior to any testing, the appropriate fluid was used to fill the phantom to a depth of 15 cm  $\pm 0.2$ cm. The fluid parameters were verified and the dipole validation was performed as described in the previous sections.

### **Test Positions:**

The Device was positioned against the SAM and flat phantom using the exact procedure described in IEEE Std 1528:2013, IEC62209-2:2010, and the Office of Engineering and Technology KDB 447498.

### **Reference Power Measurement:**

The measurement probe was positioned at a fixed location above the reference point. A power measurement was made with the probe above this reference position so it could be used for the assessing the power drift later in the test procedure.

### **Area Scan:**

A coarse area scan was performed in order to find the approximate location of the peak SAR value. This scan was performed with the measurement probe at a constant height in the simulating fluid. A two dimensional spline interpolation algorithm was then used to determine the peaks and gradients within the scanned area. The area scan resolution conformed to the requirements of KDB 865664 as shown in Table 8.

### **Zoom Scan:**

A zoom scan was performed around the approximate location of the peak SAR as determined from the area scan. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure. The zoom scan resolution conformed to the requirements of KDB 865664 as shown in Table 8.

		$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
		$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		$\leq 2$ GHz: $\leq 8$ mm $2 - 3$ GHz: $\leq 5$ mm*	$3 - 4$ GHz: $\leq 5$ mm $4 - 6$ GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$	$\leq 5$ mm	$3 - 4$ GHz: $\leq 4$ mm $4 - 5$ GHz: $\leq 3$ mm $5 - 6$ GHz: $\leq 2$ mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface $\Delta z_{\text{Zoom}}(n > 1)$ : between subsequent points	$\leq 4$ mm $\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	$3 - 4$ GHz: $\geq 28$ mm $4 - 5$ GHz: $\geq 25$ mm $5 - 6$ GHz: $\geq 22$ mm
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.			
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

Table 8: SAR Area and Zoom Scan Resolutions

**Interpolation, Extrapolation and Detection of Maxima:**

The probe is calibrated at the center of the dipole sensors which is located 1 to 2.7 mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated.

In DASY5, the choice of the coordinate system defining the location of the measurement points has no influence on the uncertainty of the interpolation, Maxima Search and extrapolation routines. The interpolation, extrapolation and maximum search routines are all based on the modified Quadratic Shepard's method.

Thereby, the interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation. The DASY5 routines construct a once-continuously differentiable function that interpolates the measurement values as follows:

- For each measurement point a trivariate (3-D) / bivariate (2-D) quadratic is computed. It interpolates the measurement values at the data point and forms a least-square fit to neighboring measurement values.
- The spatial location of the quadratic with respect to the measurement values is attenuated by an inverse distance weighting. This is performed since the calculated quadratic will fit measurement values at nearby points more accurate than at points located further away.
- After the quadratics are calculated for all measurement points, the interpolating function is calculated as a weighted average of the quadratics.

There are two control parameters that govern the behavior of the interpolation method. One specifies the number of measurement points to be used in computing the least-square fits for the local quadratics. These measurement points are the ones nearest the input point for which the quadratic is being computed. The second parameter specifies the number of measurement points that will be used in calculating the weights for the quadratics to produce the final function. The input data points used there are the ones nearest the point at which the interpolation is desired. Appropriate defaults are chosen for each of the control parameters.

The trivariate quadratics that have been previously computed for the 3-D interpolation and whose input data are at the closest distance from the phantom surface, are used in order to extrapolate the fields to the surface of the phantom.

In order to determine all the field maxima in 2-D (Area Scan) and 3-D (Zoom Scan), the measurement grid is refined by a default factor of 10 and the interpolation function is used to evaluate all field values between corresponding measurement points. Subsequently, a linear search is applied to find all the candidate maxima. In a last step, non-physical maxima are removed and only those maxima which are within 2 dB of the global maximum value are retained.

### Averaging and Determination of Spatial Peak SAR

The interpolated data is used to average the SAR over the 1g and 10g cubes by spatially discretizing the entire measured volume. The resolution of this spatial grid used to calculate the averaged SAR is 1mm or about 42875 interpolated points. The resulting volumes are defined as cubical volumes containing the appropriate tissue parameters that are centered at the location. The location is defined as the center of the incremental volume.

The spatial-peak SAR must be evaluated in cubical volumes containing a mass that is within 5% of the required mass. The cubical volume centered at each location, as defined above, should be expanded in all directions until the desired value for the mass is reached, with no surface boundaries of the averaging volume extending beyond the outermost surface of the considered region. In addition, the cubical volume should not consist of more than 10% of air. If these conditions are not satisfied then the center of the averaging volume is moved to the next location. Otherwise, the exact size of the final sampling cube is found using an inverse polynomial approximation algorithm, leading to results with improved accuracy. If one boundary of the averaging volume reaches the boundary of the measured volume during its expansion, it will not be evaluated at all. Reference is kept of all locations used and those not used for averaging the SAR. All average SAR values are finally assigned to the centered location in each valid averaging volume.

All locations included in an averaging volume are marked to indicate that they have been used at least once. If a location has been marked as used, but has never been assigned to the center of a cube, the highest averaged SAR value of all other cubical volumes which have used this location for averaging is assigned to this location. Only those locations that are not part of any valid averaging volume should be marked as unused. For the case of an unused location, a new averaging volume must be constructed which will have the unused location centered at one surface of the cube. The remaining five surfaces are expanded evenly in all directions until the required mass is enclosed, regardless of the amount of included air. Of the six possible cubes with one surface centered on the unused location, the smallest cube is used, which still contains the required mass.

If the final cube containing the highest averaged SAR touches the surface of the measured volume, an appropriate warning is issued within the post processing engine.

### Power Drift Measurement:

The probe was positioned at precisely the same reference point and the reference power measurement was repeated. The difference between the initial reference power and the final one is referred to as the power drift. The power drift measurement was used to assess the output power stability of the test sample throughout the SAR scan.

### RF Ambient Activity:

During the entire SAR evaluation, the RF ambient activity was monitored using a spectrum analyzer with an antenna connected to it. The spectrum analyzer was tuned to the frequency of measurement and with one trace set to max hold mode. In this way, it was possible to determine if at any point during the SAR measurement there was an interfering ambient signal. If an ambient signal was detected, then the SAR measurement was repeated.

## 6.0 CRITERIA

The following FCC limits for SAR apply to portable devices operating in the General Population/Uncontrolled Exposure environment:

Exposure (General Population/Uncontrolled Exposure environment)	SAR (W/kg)
Average over the whole body	0.08
Spatial Peak (1g)	1.60
Spatial Peak for hands, wrists, feet and ankles (10g)	4.00

## 7.0 TEST CONFIGURATION

The SENTRY1 can be operated and worn on the body using a pouch. The pouch is non-metallic and provides 14mm of separation between the device and the person. The pouch is formed such that the device can be positioned in one of two ways; with the screen facing toward the body or with the screen facing away from the body. Testing was performed with the sample installed in the pouch in both orientations. The test position is shown in the photographs below.

Testing was performed on the middle channel of each operating band first. When the 1g SAR exceeded 0.8W/kg on the middle channel, the low and high channels were also scanned.



*Figure 3: Test Position*

**8.0 TEST RESULTS**

The results on the following page(s) were obtained when the device was transmitting at maximum output power. Detailed measurement data and plots, which reveal information about the location of the maximum SAR with respect to the device, are referenced are shown in separate exhibits presented with this application. The measured conducted output power was compared to the power declared by the manufacturer and used for scaling the measured SAR values.

The device was evaluated according to the specific requirements found in FCC KDB 447498[9]. The worst case 1-g SAR value for the cellular transmitter was less than the 1.6mW/g limit.

**Conducted Output Power Measurements:**

Band	Channel	Frequency (MHz)	RC1/SO55	RC3/SO55	RC3/SO32 (+F-SCH)	RC3/SO32 (+SCH)	1xEvDO Rev. 0 (RTAP)	1xEvDO Rev. A (RETAP)
Cellular	1013	824.7	23.57	23.34	23.14	23.04	23.01	22.95
	384	836.52	23.42	23.22	23.21	23.17	23.12	23.09
	777	848.31	23.55	23.33	23.43	23.42	23.24	23.12
PCS	25	1851.25	23.32	23.26	23.21	23.13	23.05	22.92
	600	1880	23.33	23.24	23.14	23.04	22.97	22.89
	1175	1908.75	23.53	23.46	23.42	23.43	22.72	22.81

Table 9: Conducted Power Measurements

**Standalone SAR Measurements:**

Body Mode SAR Results Using 835MHz MSL											
Band	Channel	Frequency (MHz)	Position	Separation Distance (mm)	Power Drift (dB)	Measured SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Reported SAR 1g (W/kg)	Reported SAR 10g (W/kg)	Measured Conducted Output Power (dBm)	Maximum Conducted Output Power (dBm)
Cell	1013	824.70	Back	In Pouch	-0.14	0.25	0.19	0.31	0.23	23.57	24.50
Cell	384	836.52	Back	In Pouch	0.03	0.30	0.22	0.39	0.29	23.42	24.50
Cell	777	848.31	Back	In Pouch	-0.18	0.20	0.15	0.25	0.18	23.55	24.50
Cell	1013	824.70	Front	In Pouch							
Cell	384	836.52	Front	In Pouch	0.02	0.18	0.13	0.23	0.17	23.42	24.50
Cell	777	848.31	Front	In Pouch							

1g SAR Limit (Head &amp; Body) = 1.6W/kg, 10g SAR Limit (Extremities) = 4.0

Table 10: CDMA Cell BCO SAR Results

Body Mode SAR Results Using 1900MHz MSL											
Band	Channel	Frequency (MHz)	Position	Separation Distance (mm)	Power Drift (dB)	Measured SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Reported SAR 1g (W/kg)	Reported SAR 10g (W/kg)	Measured Conducted Output Power (dBm)	Maximum Conducted Output Power (dBm)
PCS	25	1851.25	Back	In Pouch	0.17	0.53	0.31	0.69	0.41	23.32	24.50
PCS	600	1880.00	Back	In Pouch	-0.18	0.46	0.28	0.61	0.36	23.33	24.50
PCS	1175	1908.75	Back	In Pouch	-0.21	0.71	0.41	0.89	0.52	23.53	24.50
PCS	25	1851.25	Front	In Pouch							
PCS	600	1880.00	Front	In Pouch	-0.23	0.08	0.05	0.11	0.07	23.33	24.50
PCS	1175	1908.75	Front	In Pouch							

1g SAR Limit (Head &amp; Body) = 1.6W/kg, 10g SAR Limit (Extremities) = 4.0

Table 11: CDMA PCS BC1 SAR Results

**Simultaneous Transmission Calculations:**

The device does not support simultaneous transmission with the Bluetooth and WiFi radios that are also onboard.

**SAR Test Exclusions:**

No standalone exclusions were used for this device.

## 9.0 REFERENCES

- [1] ANSI, *ANSI/IEEE C95.1-1991: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300 GHz*, The Institute of electrical and Electronics Engineers, Inc., New York, NY 10017, 1992
- [2] Federal Communications Commission, “Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields”, Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01), FCC, Washington, D.C. 20554, 1997
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, “Automated E-field scanning system for dosimetric assessments”, *IEEE Transaction on Microwave Theory and Techniques*, vol. 44, pp. 105-113, Jan. 1996.
- [4] Niels Kuster, Ralph Kastle, and Thomas Schmid, “Dosimetric evaluation of mobile communications equipment with known precision”, *IEICE Transactions on Communications*, vol. E80-B, no. 5, pp.645-652, May 1997.
- [5] NIS81, NAMAS, “The treatment of uncertainty in EMC measurement”, Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [6] Barry N. Taylor and Chris E. Kuyatt, “Guidelines for evaluating and expressing the uncertainty of NIST measurement results”, Tech. Rep., National Institute of Standards and Technology, 1994.
- [7] Federal Communications Commission, KDG 248227 - “SAR Measurement Procedures for 802.11 a/b/g Transmitters”
- [8] Federal Communications Commission, KDB 648474 – “SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas”.
- [9] Federal Communications Commission, KDB 447498 – “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”.
- [10] Federal Communications Commission, KDB 616217 – “SAR Evaluation Considerations for Laptop Computers with Antennas Built-in on Display Screens”.
- [11] Federal Communications Commission, KDB 450824 – “SAR Probe Calibration and System Verification Considerations for Measurements at 150MHz – 3GHz”.
- [12] Federal Communications Commission, KDB 865664 – “SAR Measurement Requirements for 3-6GHz”.
- [13] Federal Communications Commission, KDB 941225 – “SAR Measurement Procedures for 3G Devices”.
- [14] ANSI, *ANSI/IEEE C63.10-2009: American National Standard for Testing Unlicensed Wireless Devices*.

## 10.0 APPENDIX – WORST CASE SAR PLOTS

Date/Time: 6/29/2015 1:44:52 PM

Test Laboratory: Intertek

File Name: [CDMA Cell Band In Pouch.da52:4](#)

### CDMA Cell Band\_In Pouch (Front Side, Mid Channel)

Procedure Notes:

#### DUT: CrossMatch; Serial

Communication System: UID 0, Generic CDMA (0); Communication System Band: CDMA Cell Band; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 0.986$  S/m;  $\epsilon_r = 53.519$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV3 - SN3516; ConvF(10.51, 10.51, 10.51); Calibrated: 12/12/2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn358; Calibrated: 9/16/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

### WWAN Flat-Section MSL Testing/Front Side of Device In Pouch Mid Channel

**2/Area Scan (9x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.216 W/kg

### WWAN Flat-Section MSL Testing/Front Side of Device In Pouch Mid Channel


**2/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.746 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.249 W/kg

**SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.133 W/kg (SAR corrected for target medium)**

Maximum value of SAR (measured) = 0.225 W/kg

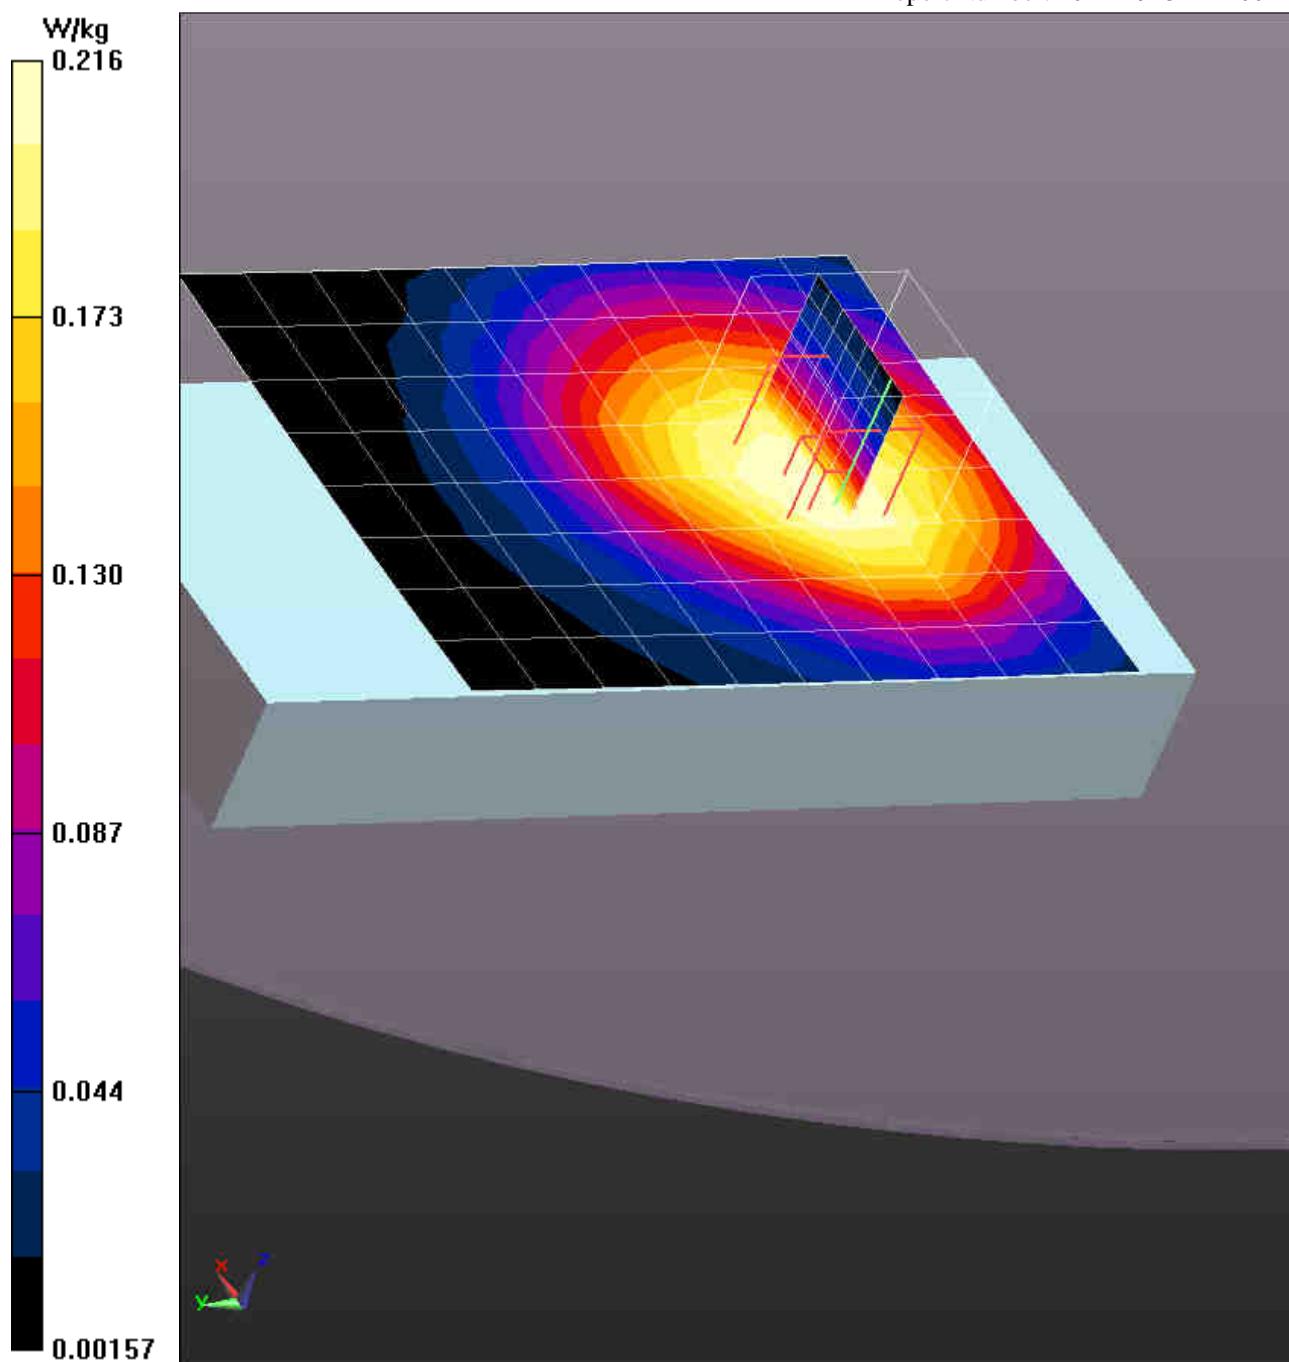

Date/Time: 6/29/2015 3:28:14 PM

Test Laboratory: Intertek

File Name: [CDMA Cell Band\\_In Pouch.da52:4](#)**CDMA Cell Band\_In Pouch (Back Side, Low Channel)**

Procedure Notes:

**DUT: CrossMatch; Serial:**

Communication System: UID 0, Generic CDMA (0); Communication System Band: CDMA Cell Band; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 825 \text{ MHz}$ ;  $\sigma = 0.975 \text{ S/m}$ ;  $\epsilon_r = 53.62$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV3 - SN3516; ConvF(10.51, 10.51, 10.51); Calibrated: 12/12/2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn358; Calibrated: 9/16/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**WWAN Flat-Section MSL Testing/Back Side of Device In Pouch Low****Channel/Area Scan (9x9x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.335 W/kg

**WWAN Flat-Section MSL Testing/Back Side of Device In Pouch Low****Channel/Zoom Scan (9x11x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 


Reference Value = 17.717 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.413 W/kg

**SAR(1 g) = 0.253 W/kg; SAR(10 g) = 0.185 W/kg (SAR corrected for target medium)**

Maximum value of SAR (measured) = 0.334 W/kg

Evaluation For: CrossMatch Technologies Inc.

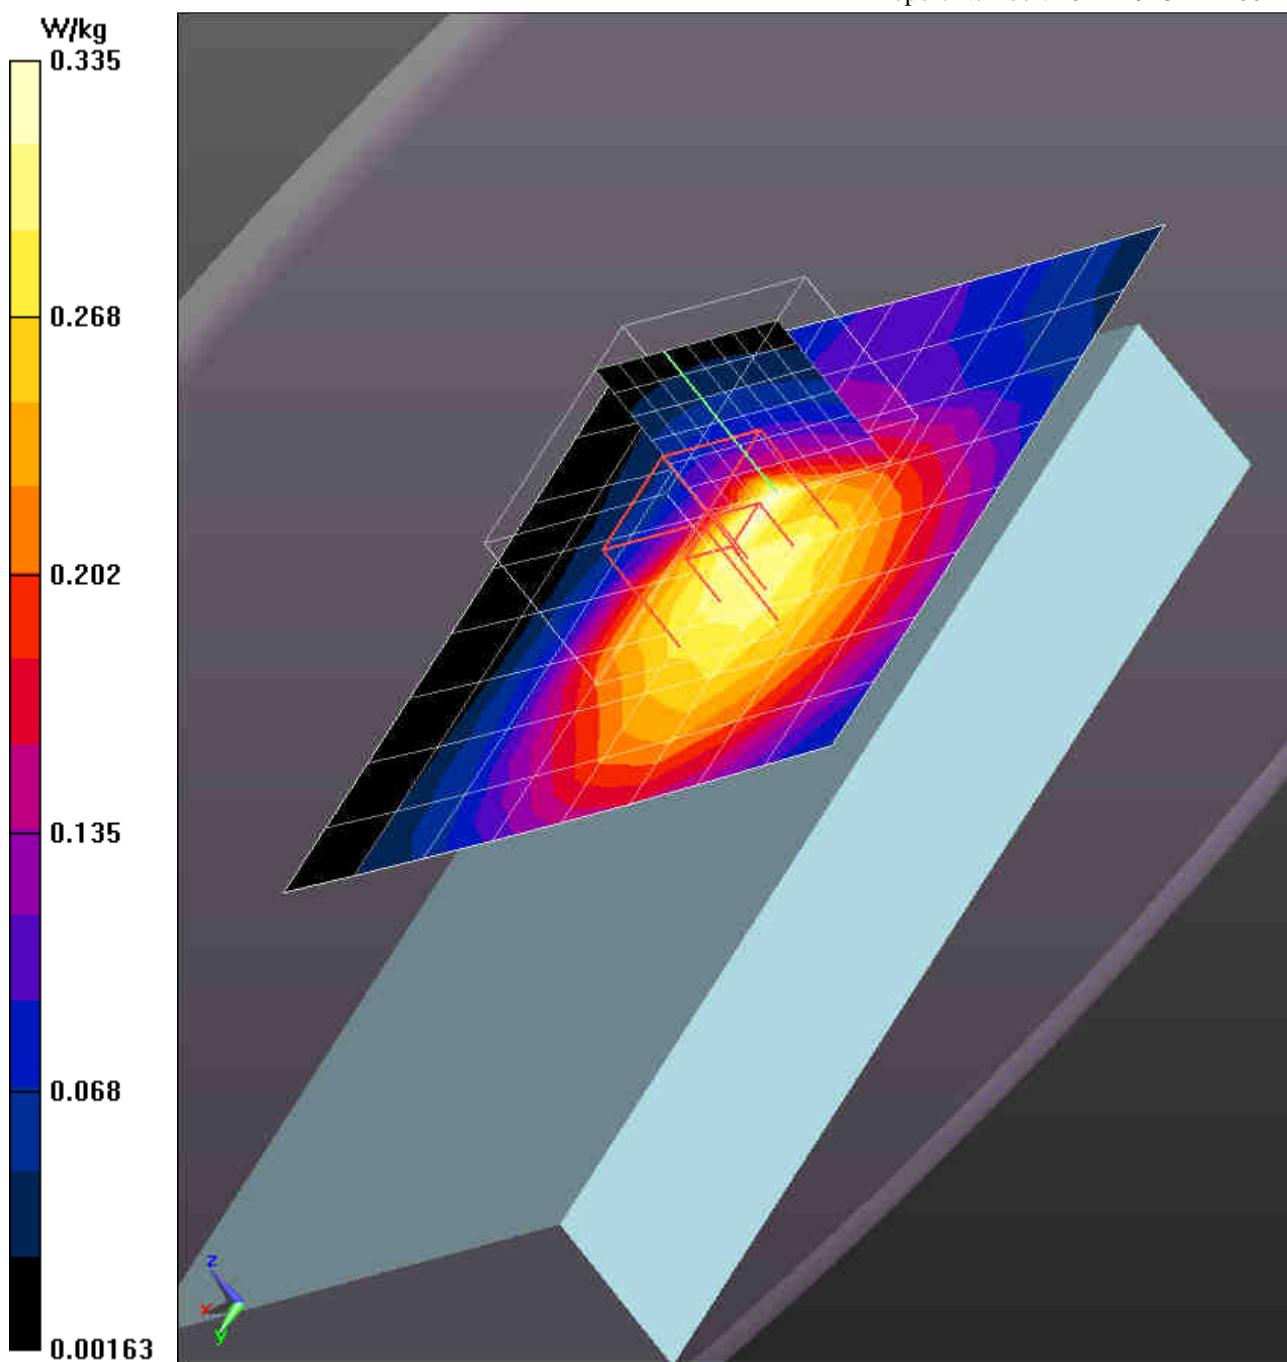Model Number: SENTRY1  
Report Number: 102144943LEX-001

Date/Time: 6/29/2015 2:36:15 PM

Test Laboratory: Intertek

File Name: [CDMA Cell Band\\_In Pouch.da52:4](#)**CDMA Cell Band\_In Pouch (Back Side, Mid Channel)**

Procedure Notes:

**DUT: CrossMatch; Serial:**

Communication System: UID 0, Generic CDMA (0); Communication System Band: CDMA Cell Band; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 0.986$  S/m;  $\epsilon_r = 53.519$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:


- Probe: EX3DV3 - SN3516; ConvF(10.51, 10.51, 10.51); Calibrated: 12/12/2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn358; Calibrated: 9/16/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)


**WWAN Flat-Section MSL Testing/Back Side of Device in Pouch Mid Channel/Area Scan (9x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.413 W/kg

**WWAN Flat-Section MSL Testing/Back Side of Device in Pouch Mid Channel/Zoom Scan (11x12x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 19.143 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 0.520 W/kg  
**SAR(1 g) = 0.303 W/kg; SAR(10 g) = 0.223 W/kg** (SAR corrected for target medium)  
Maximum value of SAR (measured) = 0.420 W/kg

Evaluation For: CrossMatch Technologies Inc.

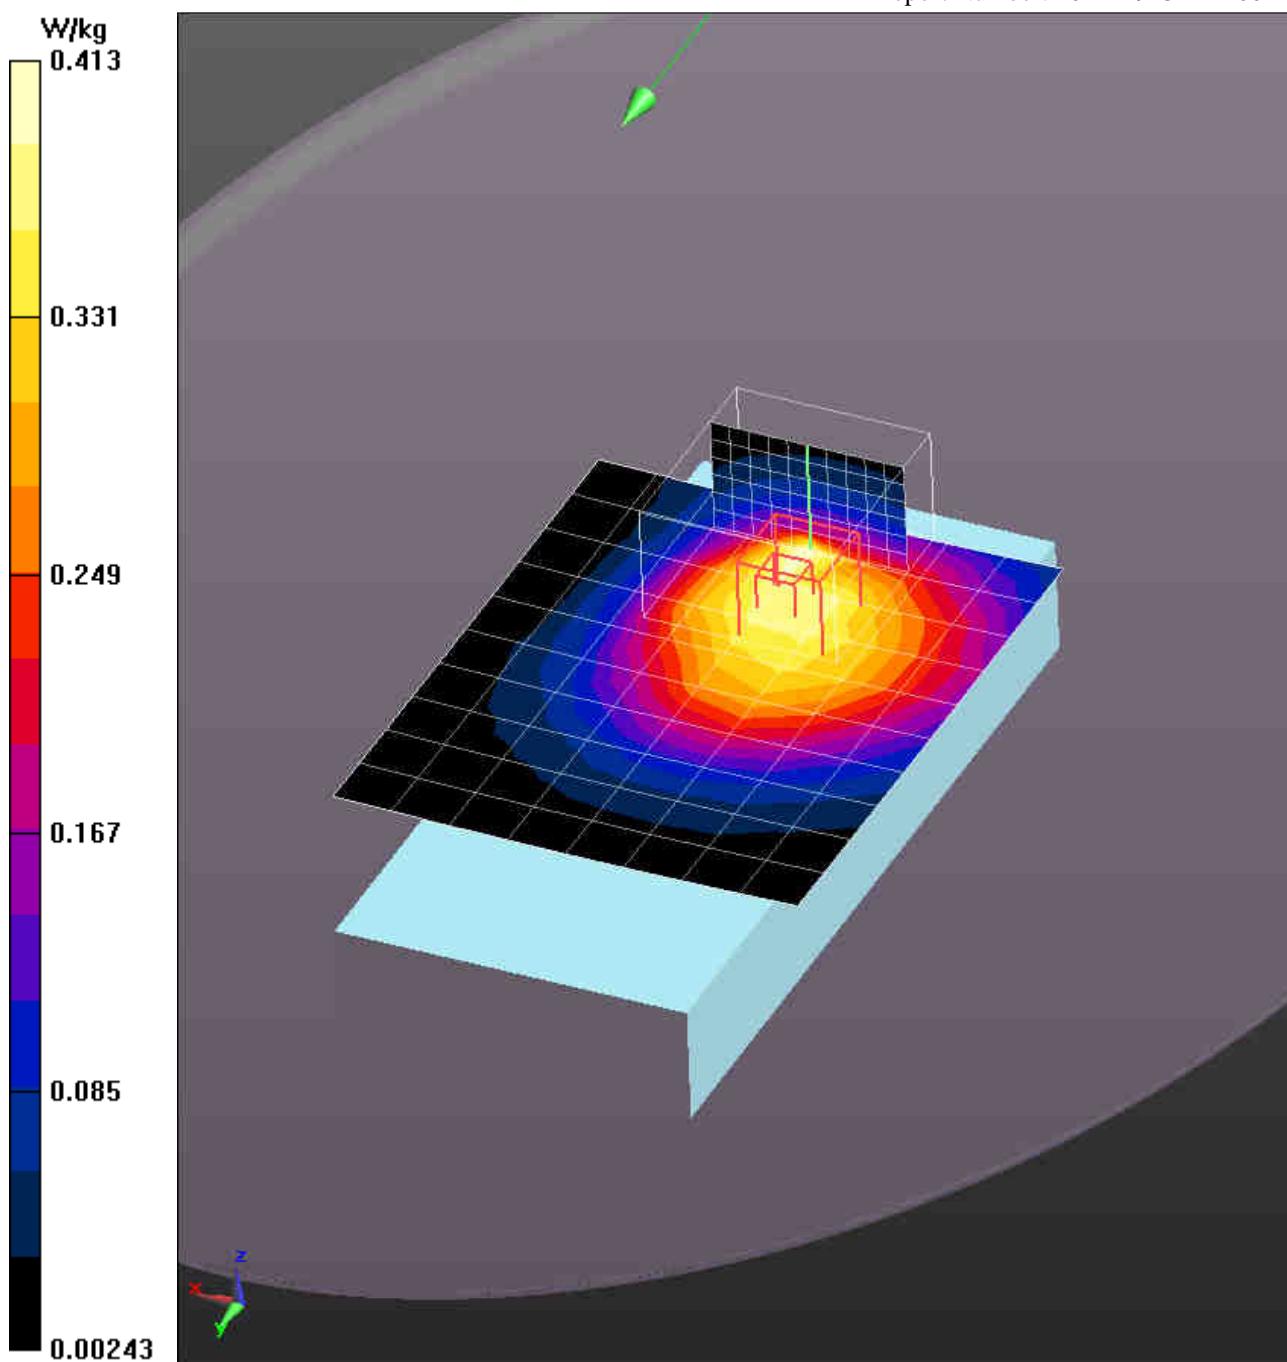Model Number: SENTRY1  
Report Number: 102144943LEX-001

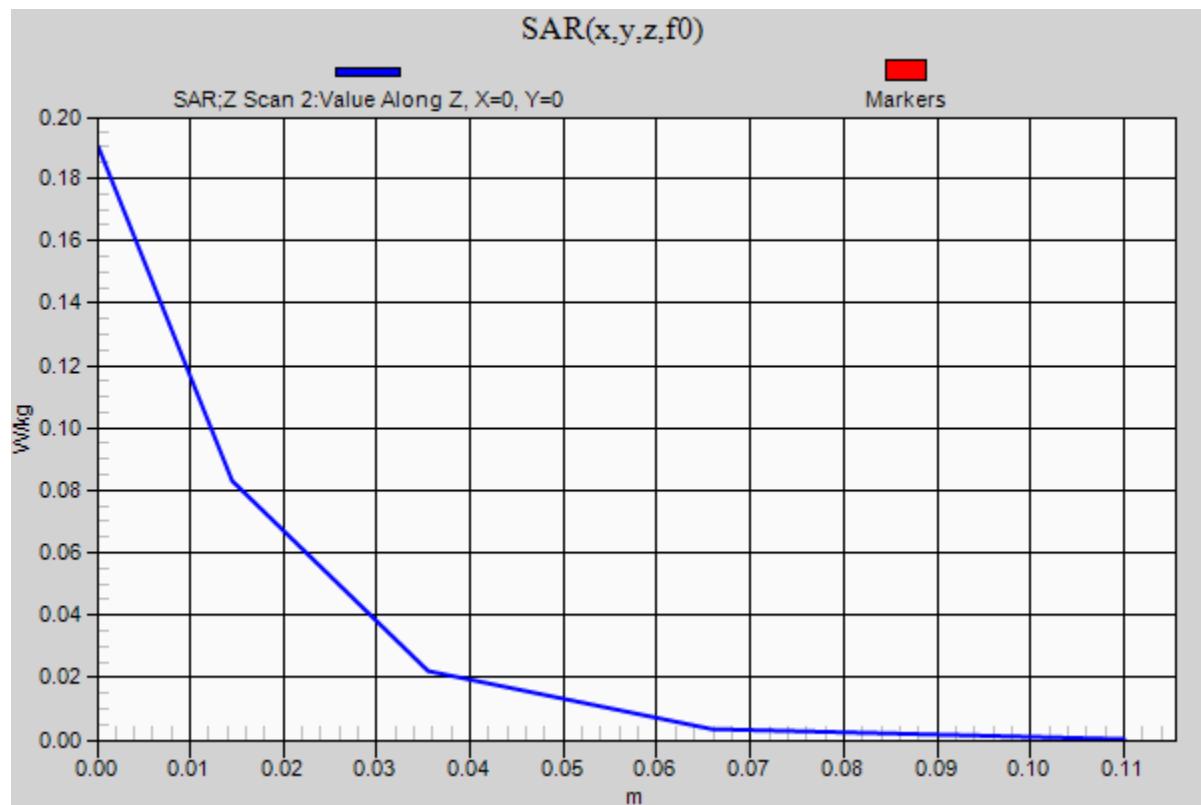

Test Laboratory: Intertek

File Name: [CDMA Cell Band In Pouch.da52:4](#)**CDMA Cell Band In Pouch (Back Side, High Channel)**

Procedure Notes:

**DUT: CrossMatch; Serial:**

Communication System: UID 0, Generic CDMA (0); Communication System Band: CDMA Cell Band; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 0.998$  S/m;  $\epsilon_r = 53.445$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV3 - SN3516; ConvF(10.51, 10.51, 10.51); Calibrated: 12/12/2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn358; Calibrated: 9/16/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)


**WWAN Flat-Section MSL Testing/Back Side of Device in Pouch High Channel/Area Scan (9x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.300 W/kg

**WWAN Flat-Section MSL Testing/Back Side of Device in Pouch High Channel/Zoom Scan (10x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 16.745 V/m; Power Drift = -0.18 dB  
Peak SAR (extrapolated) = 0.295 W/kg**SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.146 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.261 W/kg

Evaluation For: CrossMatch Technologies Inc.

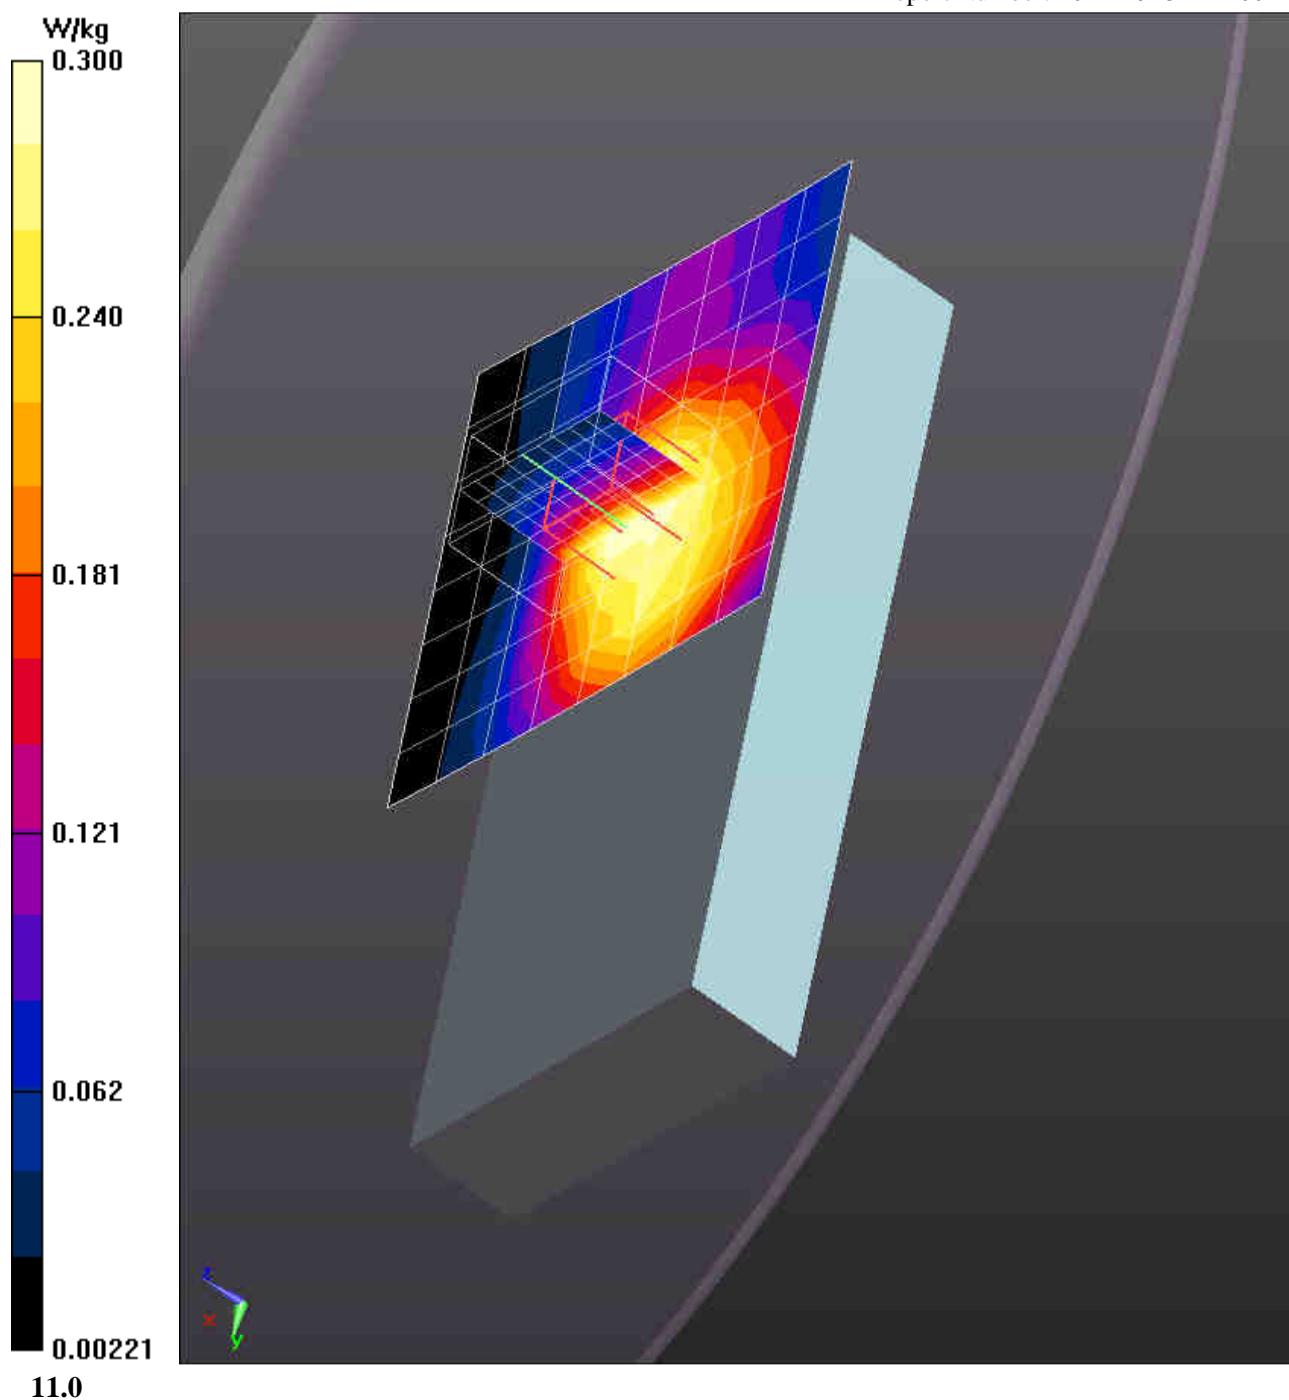Model Number: SENTRY1  
Report Number: 102144943LEX-001

---

Evaluation For: CrossMatch Technologies Inc.Model Number: SENTRY1  
Report Number: 102144943LEX-001

Date/Time: 6/29/2015 12:41:38 PM

Test Laboratory: Intertek

File Name: [CDMA PCS Band In Pouch.da52:4](#)**CDMA PCS Band\_In Pouch (Front Side, Mid Channel)**

Procedure Notes:

**DUT: CrossMatch; Serial:**

Communication System: UID 0, Generic CDMA (0); Communication System Band: CDMA PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.559 \text{ S/m}$ ;  $\epsilon_r = 51.957$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV3 - SN3516; ConvF(8.48, 8.48, 8.48); Calibrated: 12/12/2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn358; Calibrated: 9/16/2014
- Phantom: SAM 2 with CRP v5.0; Type: QD000P40CD; Serial: TP:1663
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**WWAN Flat-Section MSL Testing/Front Side of Device In Pouch Mid****Channel/Area Scan (8x8x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.111 W/kg

**WWAN Flat-Section MSL Testing/Front Side of Device In Pouch Mid****Channel/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 


Reference Value = 6.043 V/m; Power Drift = -0.23 dB

Peak SAR (extrapolated) = 0.130 W/kg

**SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.051 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.112 W/kg

Evaluation For: CrossMatch Technologies Inc.

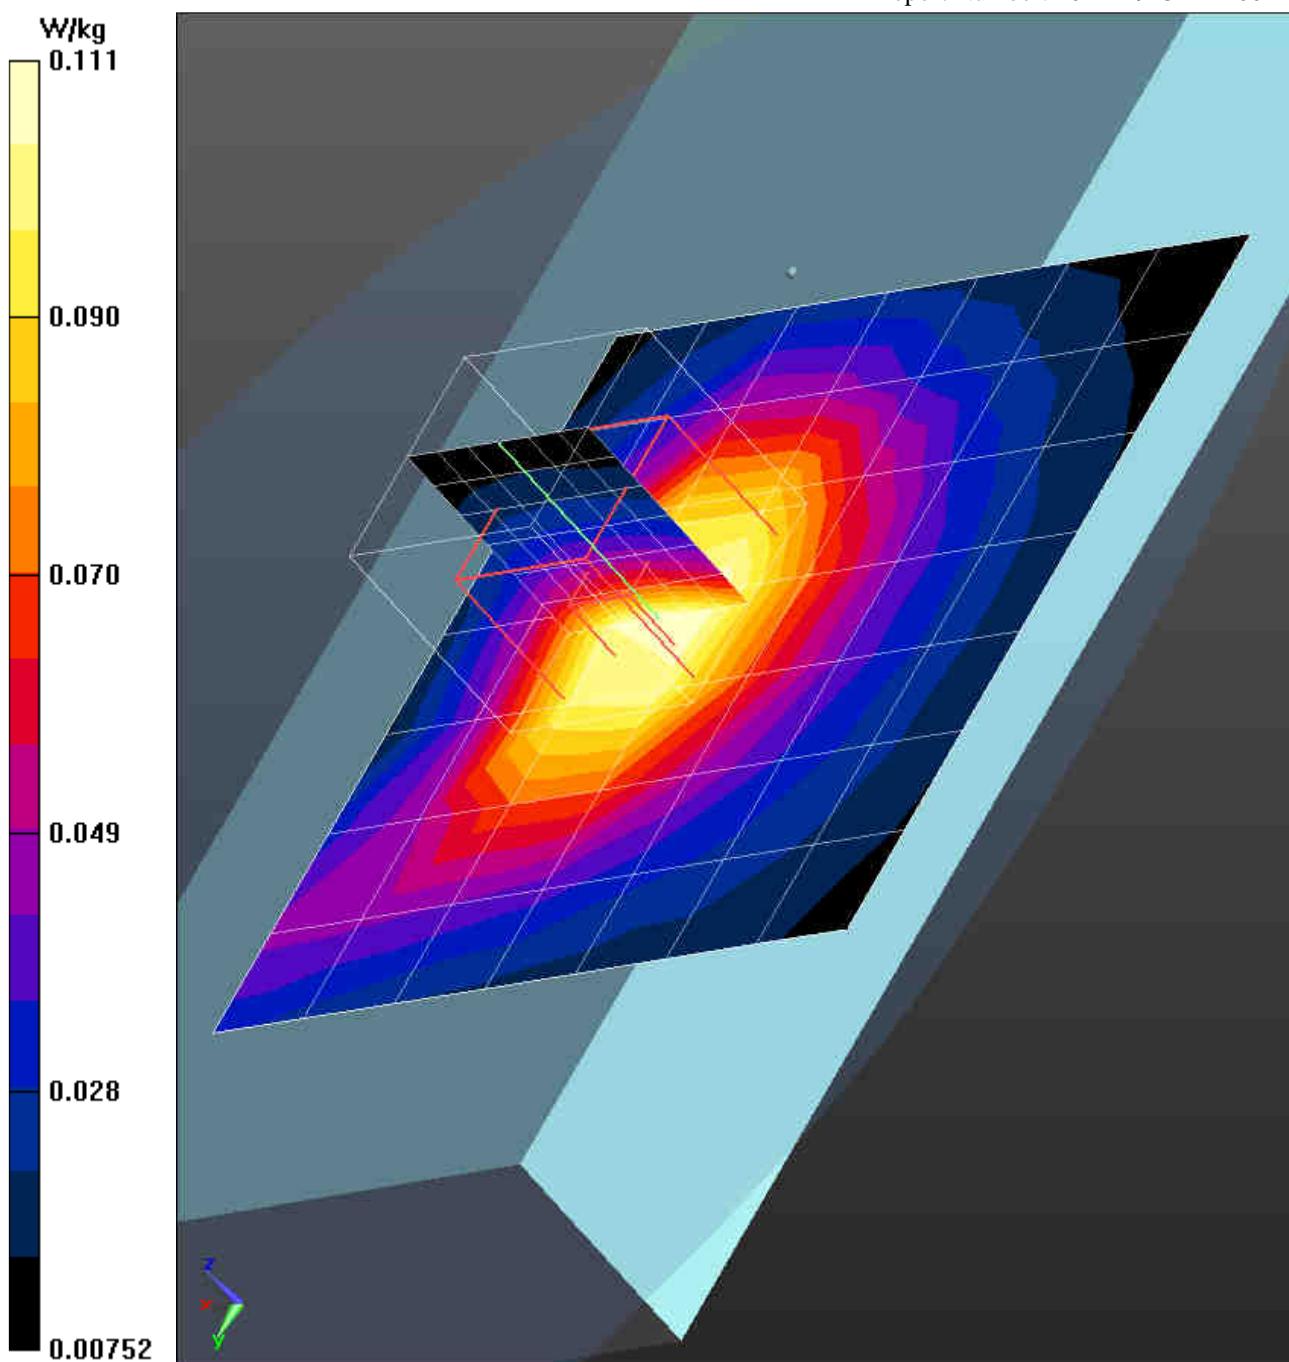Model Number: SENTRY1  
Report Number: 102144943LEX-001

Date/Time: 6/29/2015 10:59:15 AM

Test Laboratory: Intertek

File Name: CDMA PCS Band\_In Pouch.da52:4**CDMA PCS Band\_In Pouch (Back Side Low Channel)**

Procedure Notes:

**DUT: CrossMatch; Serial:**

Communication System: UID 0, Generic CDMA (0); Communication System Band: CDMA PCS Band; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1851.25$  MHz;  $\sigma = 1.527$  S/m;  $\epsilon_r = 52$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV3 - SN3516; ConvF(8.48, 8.48, 8.48); Calibrated: 12/12/2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn358; Calibrated: 9/16/2014
- Phantom: SAM 2 with CRP v5.0; Type: QD000P40CD; Serial: TP:1663
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**WWAN Flat-Section MSL Testing/Back Side of Device In Pouch Low Channel/Area Scan (8x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.643 W/kg

**WWAN Flat-Section MSL Testing/Back Side of Device In Pouch Low Channel/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 1.888 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.841 W/kg

**SAR(1 g) = 0.525 W/kg; SAR(10 g) = 0.310 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.732 W/kg

Evaluation For: CrossMatch Technologies Inc.

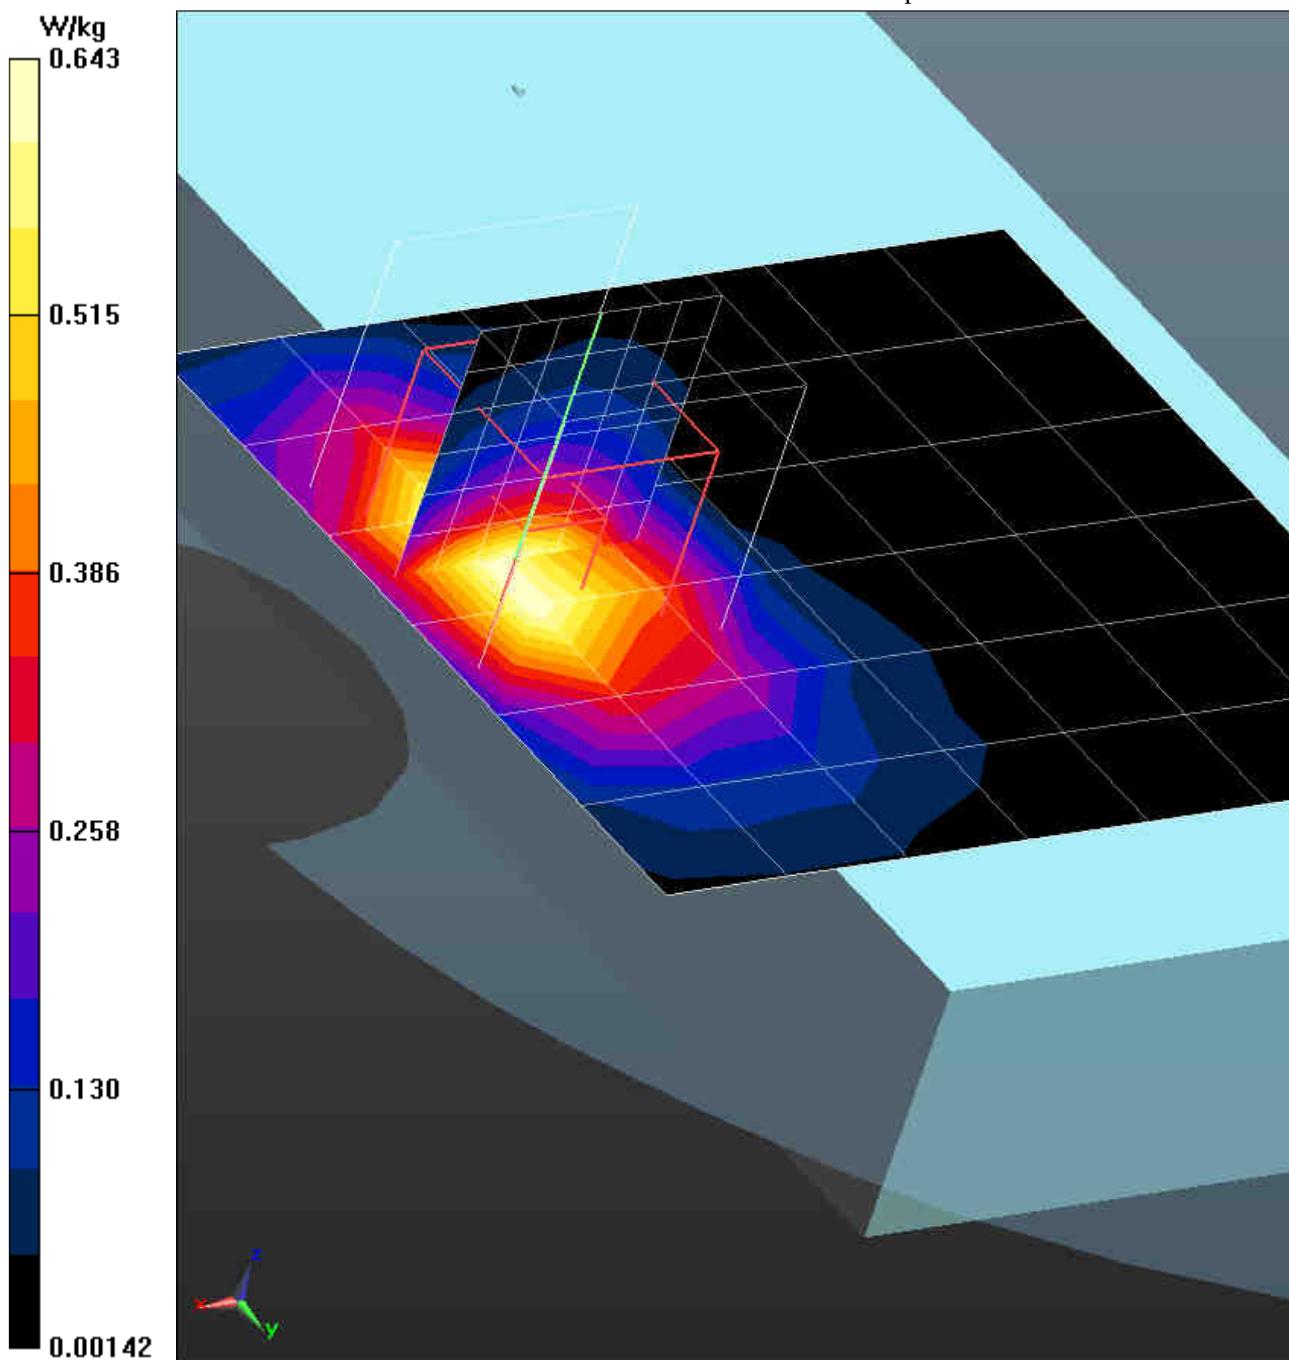Model Number: SENTRY1  
Report Number: 102144943LEX-001

Date/Time: 6/29/2015 10:26:50 AM

Test Laboratory: Intertek

File Name: CDMA PCS Band\_In Pouch.da52:4**CDMA PCS Band\_In Pouch (Back Side, Mid Channel)**

Procedure Notes:

**DUT: CrossMatch; Serial:**

Communication System: UID 0, Generic CDMA (0); Communication System Band: CDMA PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.559 \text{ S/m}$ ;  $\epsilon_r = 51.957$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV3 - SN3516; ConvF(8.48, 8.48, 8.48); Calibrated: 12/12/2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn358; Calibrated: 9/16/2014
- Phantom: SAM 2 with CRP v5.0; Type: QD000P40CD; Serial: TP:1663
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**WWAN Flat-Section MSL Testing/Back Side of Device In Pouch Mid**

**Channel/Area Scan (8x8x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.592 W/kg

**WWAN Flat-Section MSL Testing/Back Side of Device In Pouch Mid**


**Channel/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 2.752 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.752 W/kg

**SAR(1 g) = 0.464 W/kg; SAR(10 g) = 0.275 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.650 W/kg

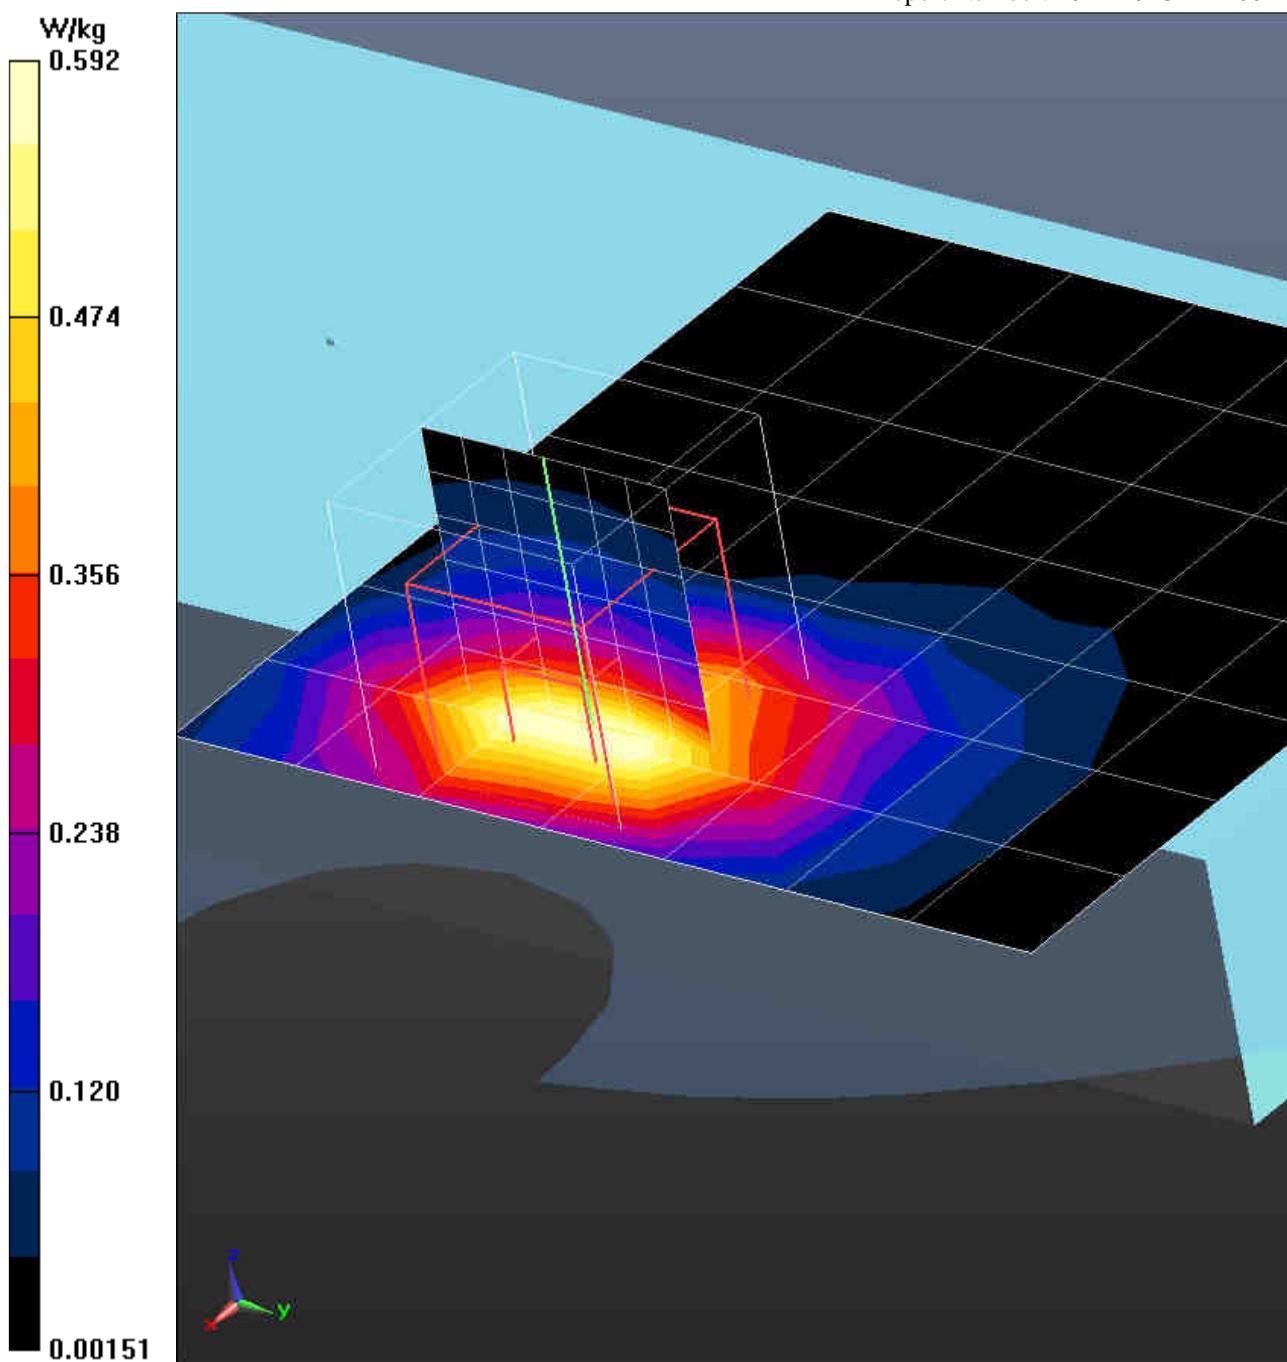

Date/Time: 6/29/2015 9:15:00 AM

Test Laboratory: Intertek

File Name: CDMA PCS Band\_In Pouch.da52:4**CDMA PCS Band\_In Pouch (Back Side, High Channel)**

Procedure Notes:

**DUT: CrossMatch; Serial:**

Communication System: UID 0, Generic CDMA (0); Communication System Band: CDMA PCS Band; Frequency: 1909.92 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1910 \text{ MHz}$ ;  $\sigma = 1.598 \text{ S/m}$ ;  $\epsilon_r = 51.922$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV3 - SN3516; ConvF(8.48, 8.48, 8.48); Calibrated: 12/12/2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn358; Calibrated: 9/16/2014
- Phantom: SAM 2 with CRP v5.0; Type: QD000P40CD; Serial: TP:1663
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**WWAN Flat-Section MSL Testing/Back Side of Device In Pouch High****Channel/Area Scan (8x7x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 1.05 W/kg

**WWAN Flat-Section MSL Testing/Back Side of Device In Pouch High****Channel/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 


Reference Value = 5.382 V/m; Power Drift = -0.21 dB


Peak SAR (extrapolated) = 1.19 W/kg

**SAR(1 g) = 0.708 W/kg; SAR(10 g) = 0.413 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.00 W/kg

Evaluation For: CrossMatch Technologies Inc.

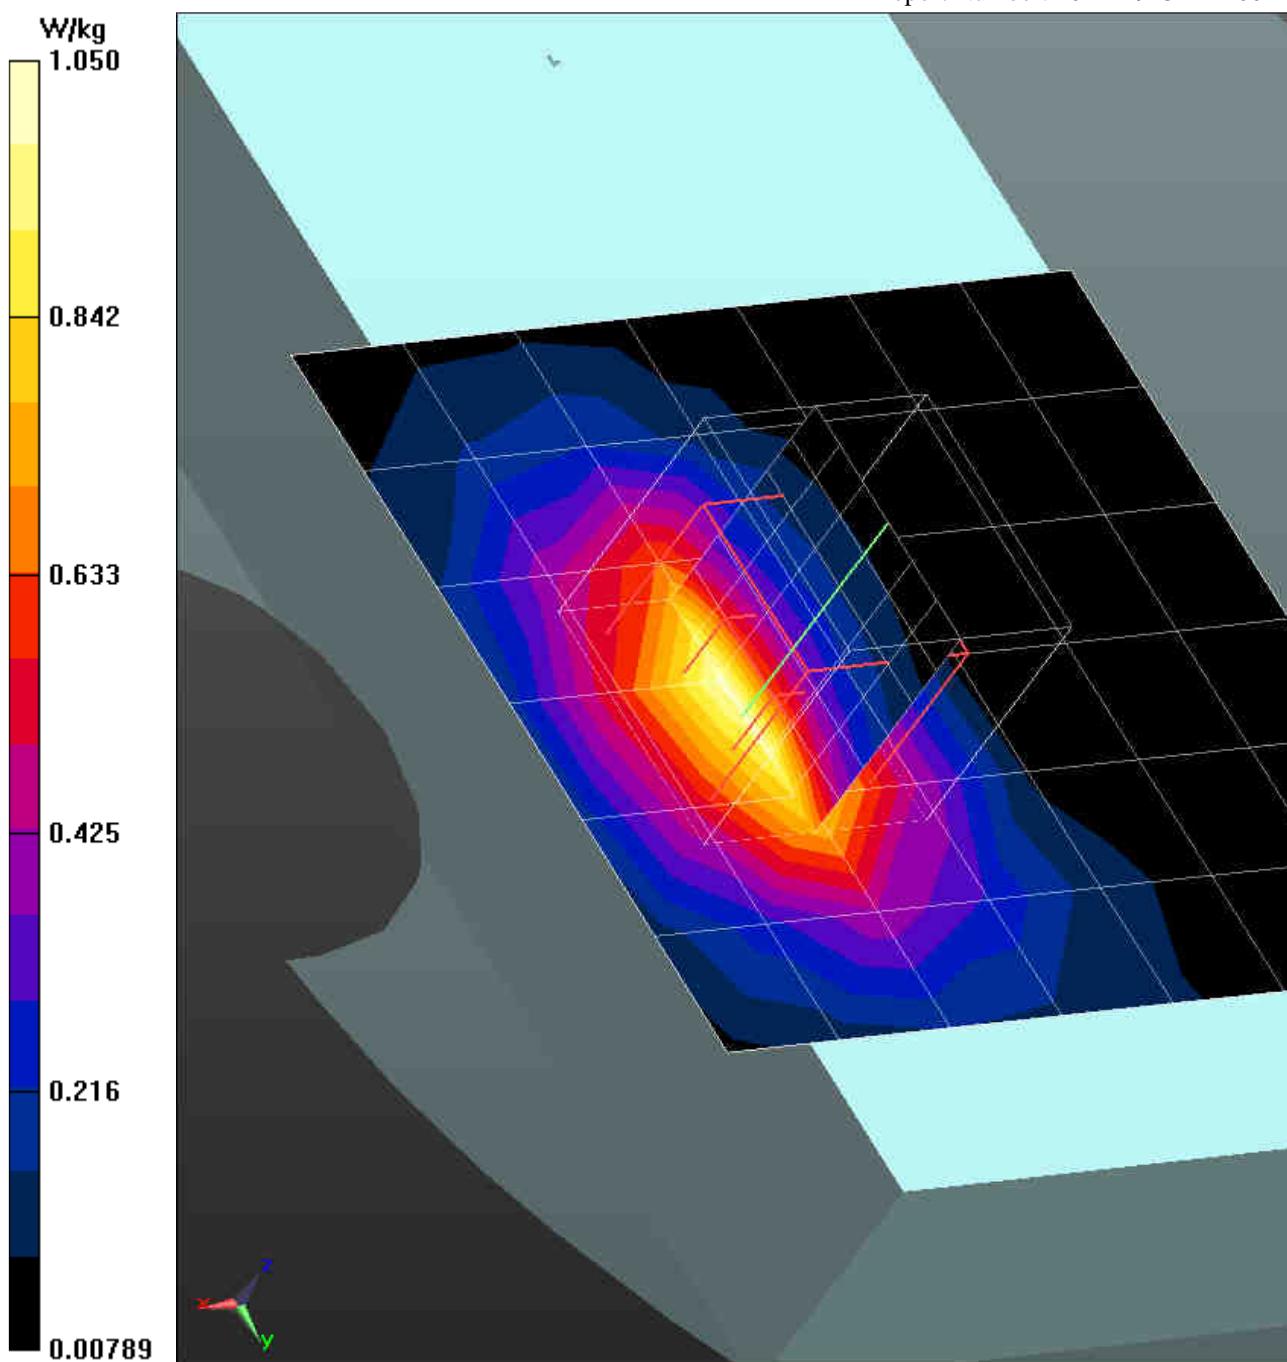Model Number: SENTRY1  
Report Number: 102144943LEX-001

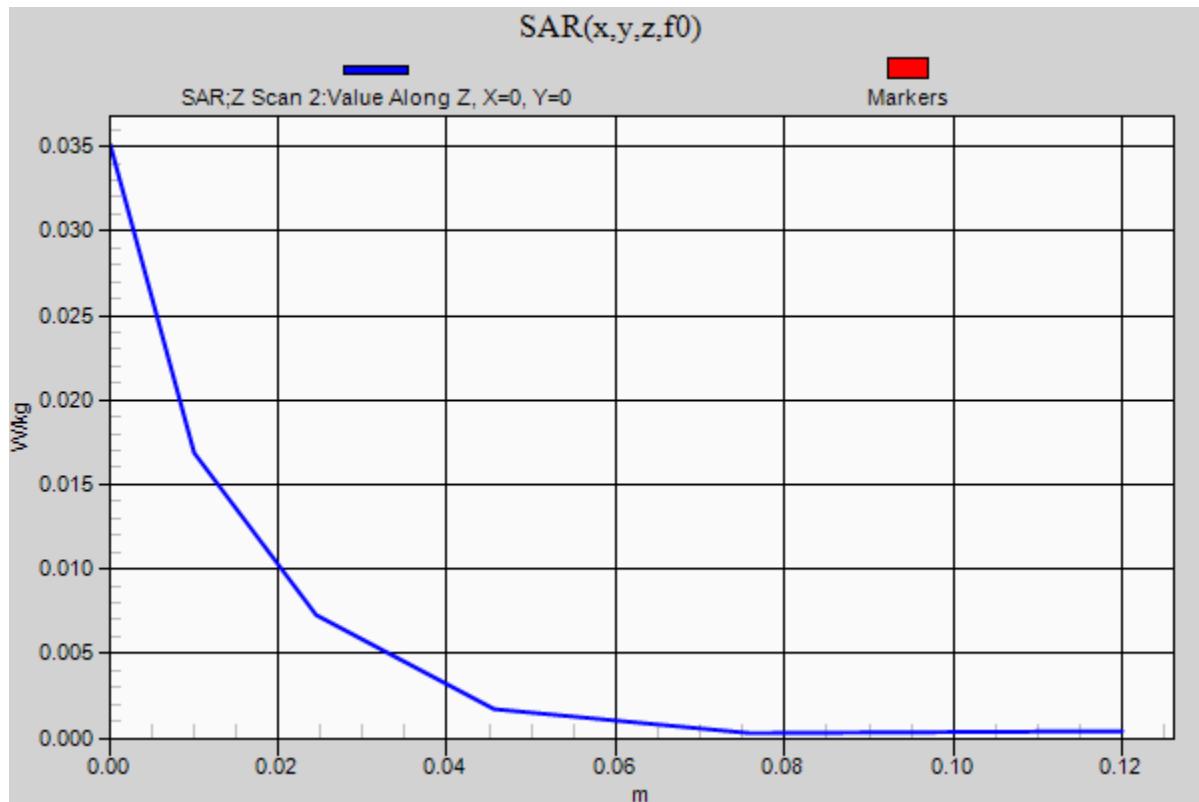

---

Evaluation For: CrossMatch Technologies Inc.Model Number: SENTRY1  
Report Number: 102144943LEX-001

## 12.0 APPENDIX – DIPOLE VALIDATION PLOTS

Date: 6/29/2015

Test Laboratory: Intertek

File Name: [835MHz Dipole Validation.da52:0](#)

### 835MHz Dipole Validation

Procedure Notes: Ambient Temp: 22.8C, Fluid Temp: 22.2C

#### DUT: Dipole 835 MHz D835V2; Serial: D835V2 - SN:4d122

Communication System: UID 10000, CW; Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 835$  MHz;  $\sigma = 0.989$  S/m;  $\epsilon_r = 52.538$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV3 - SN3516; ConvF(10.51, 10.51, 10.51); Calibrated: 12/12/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn358; Calibrated: 9/16/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

#### System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=100 mW, dist=2.0mm (EX-Probe)/Area Scan (4x13x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.21 W/kg

#### System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=100 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 36.897 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 15.2 W/kg

**SAR(1 g) = 9.93 W/kg; SAR(10 g) = 6.53 W/kg (SAR corrected for target medium)**

Normalized to target power = 1 W and actual power = 0.1 W

Maximum value of SAR (measured) = 11.0 W/kg

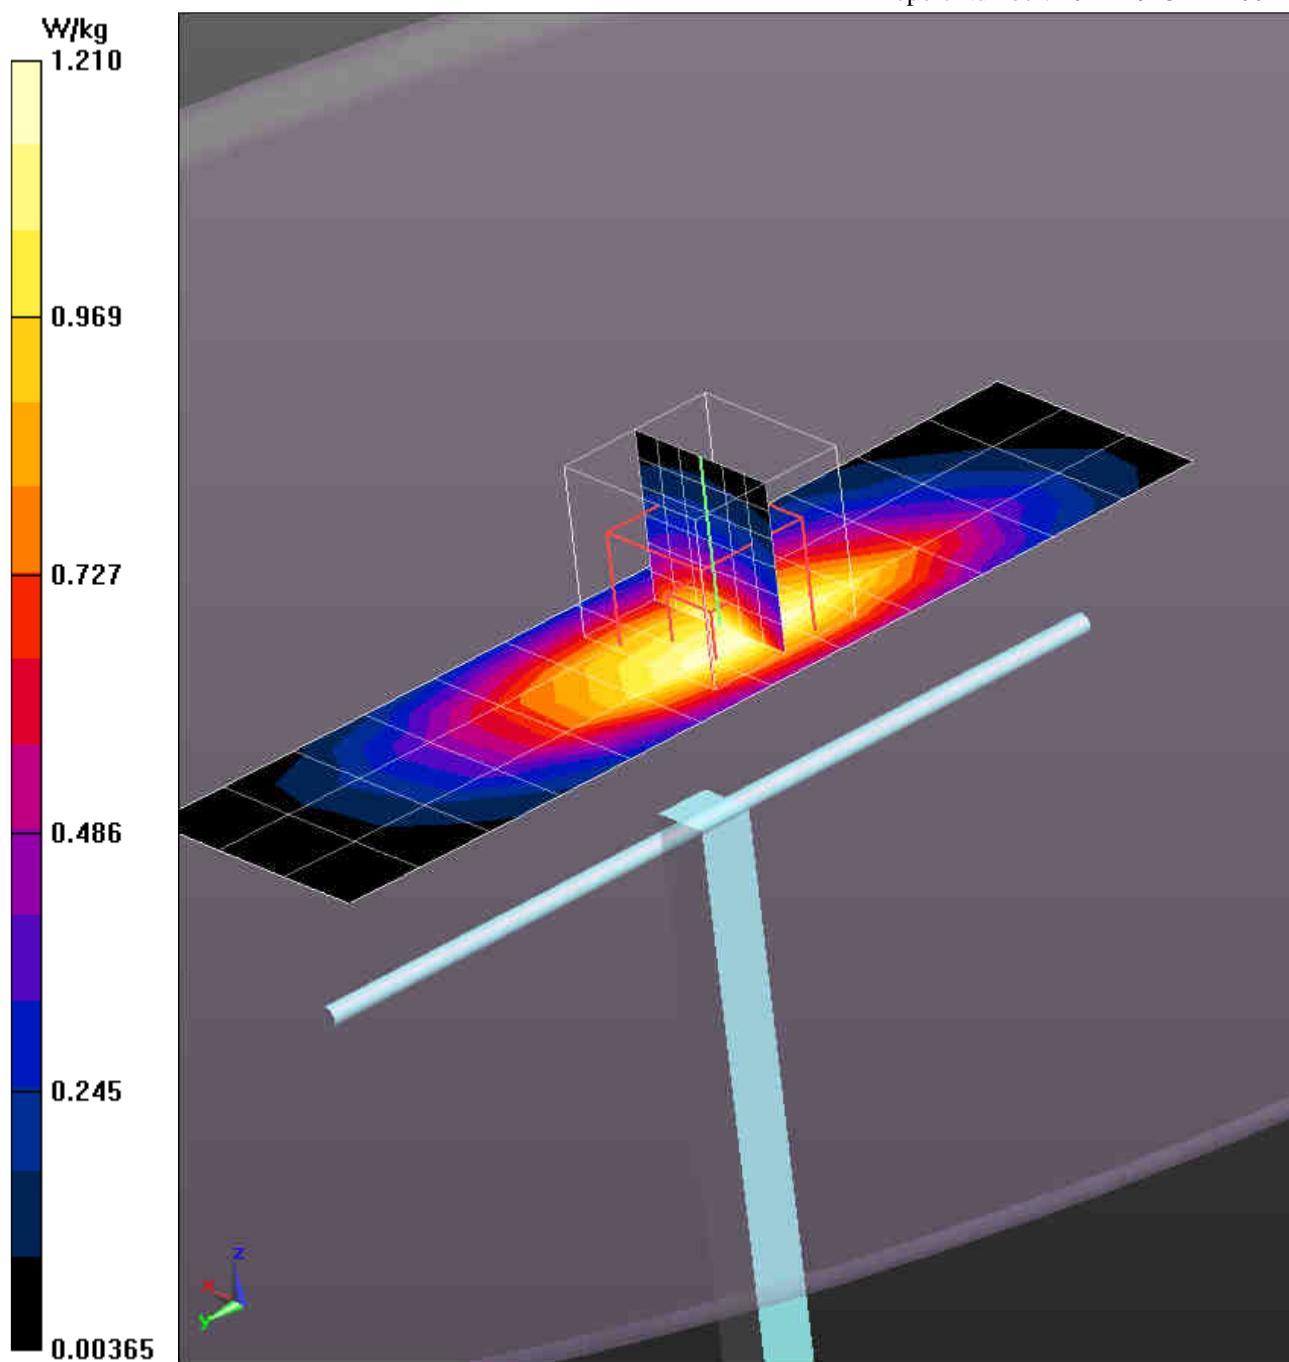

---

Evaluation For: CrossMatch Technologies Inc.Model Number: SENTRY1  
Report Number: 102144943LEX-001

Date: 6/29/2015

Test Laboratory: Intertek

File Name: 1900 MHz Dipole Validation.da52:2

## 1900 MHz Dipole Validation

Procedure Notes:

**DUT: Dipole 1900 MHz D1900V2; Serial: D1900V2 - SN:xxx**

Communication System: UID 0, CW (0); Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.585 \text{ S/m}$ ;  $\epsilon_r = 51.941$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV3 - SN3516; ConvF(8.48, 8.48, 8.48); Calibrated: 12/12/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn358; Calibrated: 9/16/2014
- Phantom: SAM 2 with CRP v5.0; Type: QD000P40CD; Serial: TP:1663
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=100mW, dist=2.0mm (EX-Probe)/Area Scan (4x7x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 5.47 W/kg**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=100mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 62.952 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 78.6 W/kg

**SAR(1 g) = 43.2 W/kg; SAR(10 g) = 22.5 W/kg (SAR corrected for target medium)**

Normalized to target power = 1 W and actual power = 0.1 W

Maximum value of SAR (measured) = 61.0 W/kg

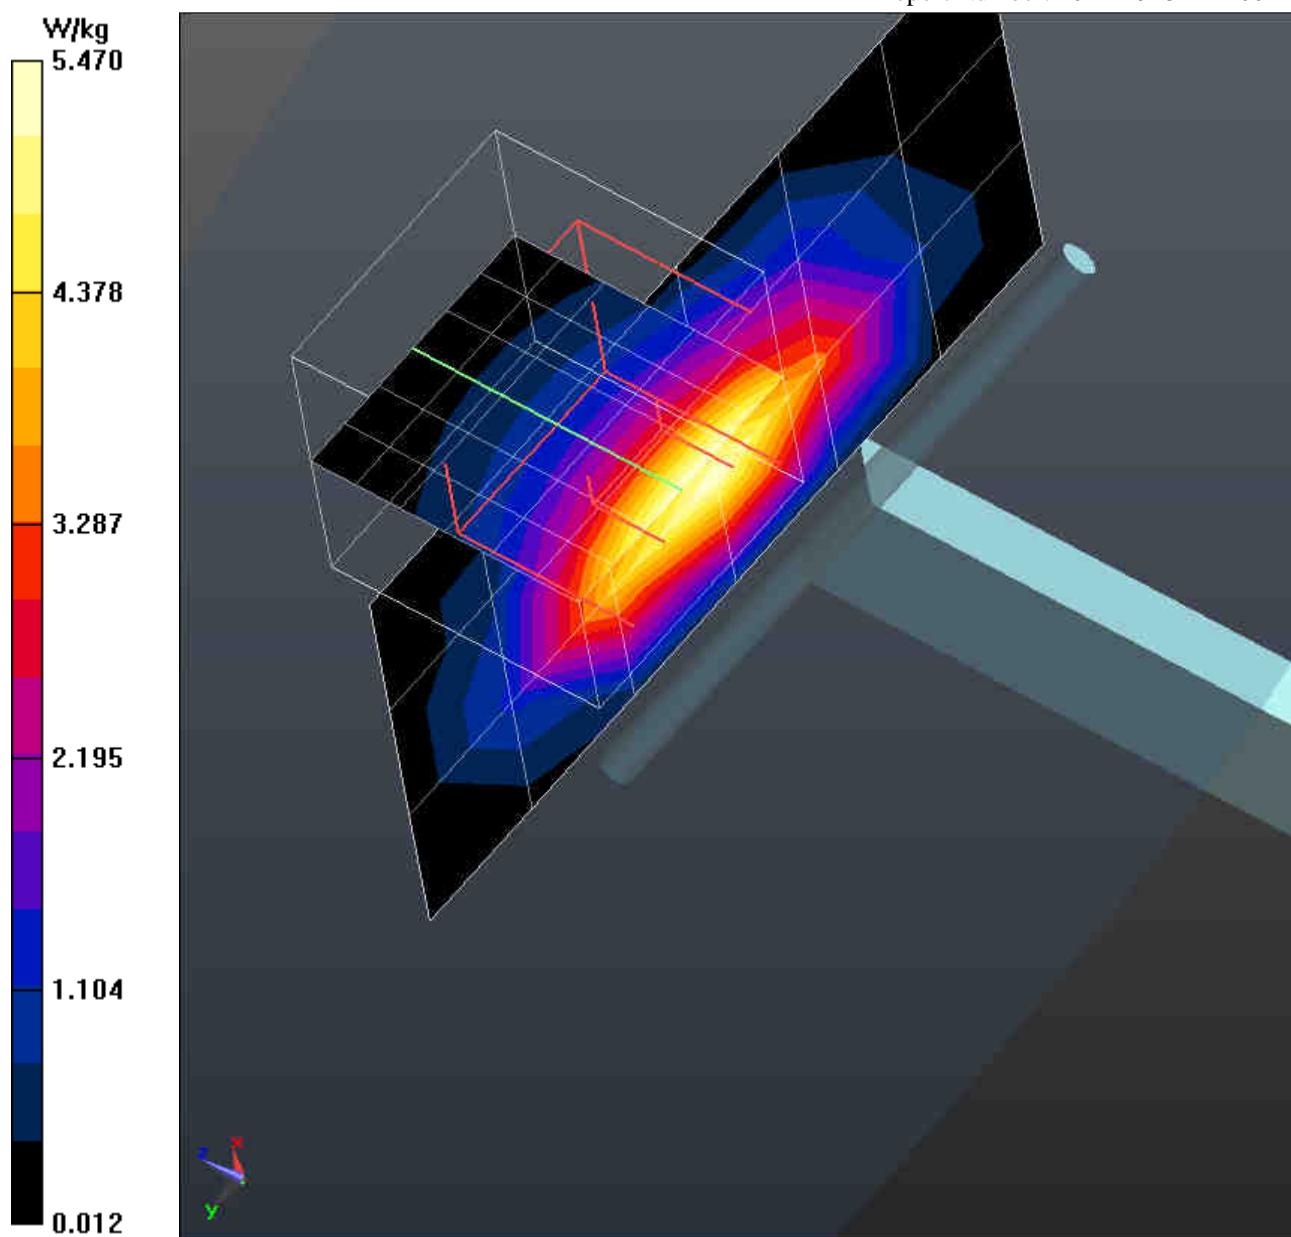

## 13.0 APPENDIX – DESCRIPTION OF THE PHANTOMS USED FOR TESTING

Schmid &amp; Partner Engineering AG

**s p e a g**

Zeughausstrasse 43, 8004 Zurich, Switzerland  
 Phone +41 44 245 9700, Fax +41 44 245 9779  
 info@speag.com, http://www.speag.com

**Certificate of Conformity / First Article Inspection**

Item	Oval Flat Phantom ELI 5.0
Type No	QD OVA 002 A
Series No	1108 and higher
Manufacturer	Untersee Composites Knebelstrasse 8, CH-8268 Mannenbach, Switzerland

**Tests**

Complete tests were made on the prototype units QD OVA 001 A, pre-series units QD OVA 001 B as well as on some series units QD OVA 001 B. Some tests are made on all series units QD OVA 002 A.

Test	Requirement	Details	Units tested
Shape	Internal dimensions, depth and sagging are compatible with standards	Bottom elliptical 600 x 400 mm, Depth 190 mm, dimension compliant with [1] for $f > 375$ MHz	Prototypes
Material thickness	Bottom: 2.0mm +/- 0.2mm	dimension compliant with [3] for $f > 800$ MHz	all
Material parameters	rel. permittivity 2 – 5, loss tangent $\leq 0.05$ , at $f \leq 6$ GHz	rel. permittivity 3.5 +/- 0.5 loss tangent $\leq 0.05$	Material samples
Material resistivity	Compatibility with tissue simulating liquids .	Compatible with SPEAG liquids. **	Phantoms, Material sample
Sagging	Sagging of the flat section in tolerance when filled with tissue simulating liquid.	within tolerance for filling height up to 155 mm	Prototypes, samples

\*\* Note: Compatibility restrictions apply certain liquid components mentioned in the standard, containing e.g. DGBE, DGMHE or Triton X-100. Observe technical note on material compatibility.

**Standards**

- [1] OET Bulletin 65, Supplement C, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", Edition 01-01
- [2] IEEE 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques, December 2003
- [3] IEC 62209-1 ed1.0, "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", 2005-02-18
- [4] IEC 62209-2 ed1.0, "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", 2010-03-30

**Conformity**

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of **body-worn** SAR measurements and system performance checks as specified in [1 – 4] and further standards.

Date 25.7.2011

**s p e a g**

Schmid & Partner Engineering AG  
 Zeughausstrasse 43, 8004 Zurich, Switzerland  
 Phone +41 44 245 9700, Fax +41 44 245 9779  
 info@speag.com, http://www.speag.com

Signature / Stamp

Evaluation For: CrossMatch Technologies Inc.

Model Number: SENTRY1  
Report Number: 102144943LEX-001

Schmid &amp; Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland  
 Phone +41 44 245 9700, Fax +41 44 245 9779  
 info@speag.com, http://www.speag.com

### Certificate of Conformity / First Article Inspection

Item	SAM Twin Phantom V4.0 and V5.0
Type No	QD 000 P40 C
Series No	TP-1150 and higher
Manufacturer	Untersee Composites Knebelstrasse 8, CH-8268 Mannenbach, Switzerland

#### Tests

Complete tests were made on the pre-series QD 000 P40 A, # TP-1001, on the series first article QD 000 P40 B # TP-1006. Certain parameters are retested on series items.

Test	Requirement	Details	Units tested
Dimensions	Compliant with the geometry according to the CAD model.	IT'IS CAD File *	First article, Samples
Material thickness of shell	2mm +/- 0.2mm in flat section, other locations: +/- 0.2mm with respect to CAD file	in flat section, in the cheek area	First article, Samples, TP-1314 ff.
Material thickness at ERP	6mm +/- 0.2mm at ERP		First article, All items
Material parameters	rel. permittivity 2 – 5, loss tangent $\leq 0.05$ , at $f \leq 6$ GHz	rel. permittivity 3.5 +/- 0.5 loss tangent $\leq 0.05$	Material samples
Material resistivity	Compatibility with tissue simulating liquids .	Compatible with SPEAG liquids. **	Phantoms, Material sample
Sagging	Sagging of the flat section in tolerance when filled with tissue simulating liquid.	< 1% for filling height up to 155 mm	Prototypes, Sample testing

\* The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of the other documents.

\*\* Note: Compatibility restrictions apply certain liquid components mentioned in the standard, containing e.g. DGBE, DGMHE or Triton X-100. Observe technical note on material compatibility.

#### Standards

- [1] OET Bulletin 65, Supplement C, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", Edition 01-01
- [2] IEEE 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques, December 2003
- [3] IEC 62209-1 ed1.0, "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", 2005-02-18
- [4] IEC 62209-2 ed1.0, "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", 2010-03-30

#### Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of **hand-held** SAR measurements and system performance checks as specified in [1 – 4] and further standards.

s p e a g

Date 25.07.2011

Signature / Stamp

Schmid & Partner Engineering AG  
 Zeughausstrasse 43, 8004 Zurich, Switzerland  
 Phone +41 44 245 9700, Fax +41 44 245 9779  
 info@speag.com, http://www.speag.com

Evaluation For: CrossMatch Technologies Inc.

Model Number: SENTRY1

Report Number: 102144943LEX-001

## 14.0 APPENDIX – SYSTEM VALIDATION SUMMARY

Per FCC KDB 865664, a tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters have been included in the summary table below. The validation was performed with reference dipoles using the required tissue equivalent media for system validation according to KDB 865664. Each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point. All measurements were performed using probes calibrated for CW signals. Modulations in the table above represent test configurations for which the SAR system has been validated. The SAR system was also validated with modulated signals per KDB 865664.

Frequency (MHz)	Date	Probe (SN#)	Probe (Model #)	Probe Calibration Point		Dielectric Properties		CW Validation			Modulation Validation		
				Frequency (MHz)	Fluid Type	$\sigma$	$\epsilon_r$	Sensitivity	Probe Linearity	Probe Isotropy	Mod. Type	Duty Factor	PAR
835	1/15/2015	3516	EX3DV3	835	Body	53.1	1.01	Pass	Pass	Pass	GMSK	Pass	N/A
1800	1/15/2015	3516	EX3DV3	1800	Body	51.7	1.48	Pass	Pass	Pass	GMSK	Pass	N/A
1900	1/15/2015	3516	EX3DV3	1900	Body	51.4	1.59	Pass	Pass	Pass	GMSK	Pass	N/A

Table 12: SAR System Validation Summary