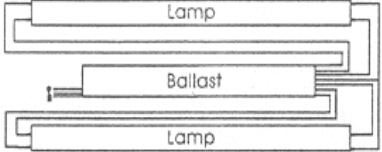
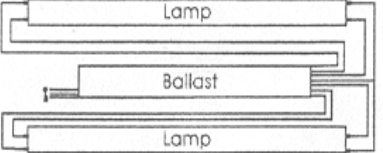
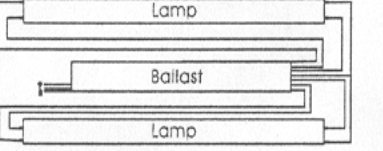


Label Drawing

	SVA-LUX FBT T5 14×2 FLUORESCENT LAMP ELECTRONIC BALLAST 2 LAMP T5 14W	Input voltage	120V	FCC ID QA7FBTT5002 Part 18 Non-consumer Class P Type 1 outdoor Rapid start Grounding -Ballast case must be Grounded in accordance with the National electric code	 LISTED		T4
		Input current	0.28 (A)				T3
		Input frequency	60(HZ)				T2
		Input power	33 W				T1T1
		Power factor	>0.99				T2
		THD	<10%				T3
		CF	< 1.6				T4
		tc(°C)	65Max				

	SVA-LUX FBT T5 21×2 FLUORESCENT LAMP ELECTRONIC BALLAST 2 LAMP T5 21W	Input voltage	120V	FCC ID QA7FBTT5002 Part 18 Non-consumer Class P Type 1 outdoor Rapid start Grounding -Ballast case must be Grounded in accordance with the National electric code	 LISTED		T4
		Input current	0.42 (A)				T3
		Input frequency	60(HZ)				T2
		Input power	50W				T1T1
		Power factor	>0.99				T2
		THD	<10%				T3
		CF	< 1.6				T4
		tc(°C)	65Max				

	SVA-LUX FBT T5 24×2 FLUORESCENT LAMP ELECTRONIC BALLAST 2 LAMP T5 24W	Input voltage	120V	FCC ID QA7FBTT5002 Part 18 Non-consumer Class P Type 1 outdoor Rapid start Grounding -Ballast case must be Grounded in accordance with the National electric code	 LISTED		T4
		Input current	0.52 (A)				T3
		Input frequency	60(HZ)				T2
		Input power	63 W				T1T1
		Power factor	>0.99				T2
		THD	<10%				T3
		CF	< 1.6				T4
		tc(°C)	65Max				


SVA-LUX

FBT T5 39×2
FLUORESCENT LAMP
ELECTRONIC BALLAST
2 LAMP T5 39W

G
L
N

Input voltage 120V
Input current **0.78 (A)**
Input frequency 60(hz)
Input power **91 W**
Power factor >0.99
THD <10%
CF < 1.6
tc(°C) 65Max

FCC ID **QA7FBTT5002**
Part 18 Non-consumer
Class P Type 1 outdoor
Rapid start
Grounding -Ballast case must be
Grounded in accordance with the
National electric code



T4
T3
T2
T1T1
T2
T3
T4


SVA-LUX

FBT T5 54×2
FLUORESCENT LAMP
ELECTRONIC BALLAST
2 LAMP T5 54W

G
L
N

Input voltage 120V
Input current **1.05 (A)**
Input frequency 60(hz)
Input power **125 W**
Power factor >0.99
THD <10%
CF < 1.6
tc(°C) 65Max

FCC ID **QA7FBTT5002**
Part 18 Non-consumer
Class P Type 1 outdoor
Rapid start
Grounding -Ballast case must be
Grounded in accordance with the
National electric code



T4
T3
T2
T1T1
T2
T3
T4