

TEST REPORT

For

ActivConnect G Series Android PC

Model Number: PRM-X6PRO-01

FCC ID: QAM018

IC: 5459A-018

Report Number : WT168002530

Test Laboratory : Shenzhen Academy of Metrology and Quality Inspection
Site Location : National Digital Electronic Product Testing Center
Site Location : NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China
Tel : 0086-755-86928965
Fax : 0086-755-86009898-31396
Web : www.smq.com.cn
E-mail : emcrf@smq.com.cn

Test report declaration

Applicant : PROMETHEAN LIMITED
Address : PROMETHEAN HOUSE, LOWER PHILIPS RD WHITEBIRK
BLACKBURN, BB1 5TH UNITED KINGDOM
Manufacturer : PROMETHEAN LIMITED
Address : PROMETHEAN HOUSE, LOWER PHILIPS RD WHITEBIRK
BLACKBURN, BB1 5TH UNITED KINGDOM
EUT Description : ActivConnect G Series Android PC
Model No : PRM-X6PRO-01
Trade mark : Promethean
Serial Number : /
FCC ID : QAM018
IC : 5459A-018


Test Standards:


FCC Part 15 15.207, 15.209, 15.247(2015)

RSS-247 Issue 1(2015-05) RSS-Gen Issue 4(2014-11)

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with FCC Rules Part 15.207, 15.209 15.247 and IC Rules RSS-247 Issue 1(2015-05), RSS-Gen Issue 4(2014-11)

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Project Engineer:  Date: May.13, 2016
(Chen Sulin 陈司林)

Checked by:  Date: May.13, 2016
(Lin Yixiang 林奕翔)


Approved by:  Date: May.13, 2016
(Lin Bin 林斌)

TABLE OF CONTENTS

TEST REPORT DECLARATION.....	2
1. TEST RESULTS SUMMARY.....	5
2. GENERAL INFORMATION.....	6
2.1. Report information.....	6
2.2. Laboratory Accreditation and Relationship to Customer	6
2.3. Measurement Uncertainty.....	7
3. PRODUCT DESCRIPTION.....	8
3.1. EUT Description	8
3.2. Related Submittal(s) / Grant (s)	8
3.3. Block Diagram of EUT Configuration	8
3.4. Operating Condition of EUT	8
3.5. Support Equipment List.....	9
3.6. Test Conditions.....	9
3.7. Special Accessories.....	9
3.8. Equipment Modifications	9
4. TEST EQUIPMENT USED.....	10
5. CONDUCTED DISTURBANCE TEST	11
5.1. Test Standard and Limit.....	11
5.2. Test Procedure	11
5.3. Test Arrangement	11
5.4. Test Data	11
6. RADIATED DISTURBANCE TEST	15
6.1. Test Standard and Limit.....	15
6.2. Test Procedure	15
6.3. Test Arrangement	15
6.4. Test Data	16
7. 20DB BANDWIDTH MEASUREMENT	34
7.1. LIMITS OF 20dB BANDWIDTH MEASUREMENT	34
7.2. TEST PROCEDURE.....	34
7.3. TEST SETUP	34

7.4. Test Data	34
8. CARRIER FREQUENCY SEPARATION MEASUREMENT	37
8.1. LIMITS OF Carrier frequency separation measurement	37
8.2. TEST PROCEDURES	37
8.3. TEST SETUP	37
8.4. Test Data	37
9. NUMBER OF HOPPING CHANNEL	40
9.1. LIMITS OF 9. NUMBER OF HOPPING CHANNEL	40
9.2. TEST PROCEDURE	40
9.3. TEST SETUP	40
9.4. Test Data	40
10. TIME OF OCCUPANCY	42
10.1. LIMITS OF TIME OF OCCUPANCY	42
10.2. TEST PROCEDURE	42
10.3. TEST RESULTS	43
11. PEAK POWER	45
11.1. LIMITS OF Peak Power	45
11.2. TEST PROCEDURE	45
11.3. TEST RESULTS	45
12. BAND EDGES MEASUREMENT	48
12.1. Limits of Band Edges Measurement	48
12.2. TEST PROCEDURE	48
12.3. Test Results	48
13. CONDUCTED SPURIOUS EMISSIONS	57
13.1. Limits of Band Edges Measurement	57
13.2. Test Procedure	57
13.3. TEST RESULTS	57
14. ANTENNA REQUIREMENTS	62
14.1. Applicable requirements	62
14.2. Antenna Connector	62
14.3. Antenna Gain	62

1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	IC Rules	Test Results
20dB bandwidth measurement	15.247 (a) (1)	RSS-247 Clause 5.1(1)	Pass
Carrier frequency separation measurement	15.247 (a) (1)	RSS-247 Clause 5.1(2)	Pass
Number of hopping channel	15.247 (a) (1) III	RSS-247 Clause 5.1(4)	Pass
Time of occupancy	15.247 (a) (1) III	RSS-247 Clause 5.1(4)	Pass
Peak output power	15.247 (b) (1)	RSS-247 Clause 5.4(2)	Pass
Band edge compliance measurement	15.247 (d)	RSS-247 Clause 5.5	Pass
Radiated spurious emission & Radiated restricted band measurement	15.247 (d) / 15.205 & 15.209	RSS-247 Clause 5.5	Pass
Conducted emission test for power port	15.207	RSS-Gen Clause 6.6	Pass
Antenna Requirment	15.203	RSS-Gen Section8.1.3	Pass

Remark: "N/A" means "Not applicable."

2. GENERAL INFORMATION

2.1. Report information

- 2.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.
- 2.1.2. The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 2.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at Bldg. of Metrology & Quality Inspection, Longzhu Road, Nanshan District, Shenzhen, Guangdong, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number are 446246 806614 994606(semi anechoic chamber).

The Laboratory is listed in Voluntary Control Council for Interference by Information Technology Equipment (VCCI), and the registration number are R-1974(open area test site) , R-1966(semi anechoic chamber),C-2117(mains ports conducted interference measurement) and T-180(telecommunication ports conducted interference measurement).

The Laboratory is registered to perform emission tests with Industry Canada (IC), and the registration number is 11177A-1 11177A-2.

TUV Rhineland accredits the Laboratory for conformance to IEC and EN standards, the registration number is E2024086Z02.

2.3.Measurement Uncertainty

Conducted Emission
9kHz~30MHz 3.5dB

Radiated Emission
30MHz~1000MHz 4.5dB
1GHz~26.5GHz 4.6dB

3. PRODUCT DESCRIPTION

3.1. EUT Description

Description : ActivConnect G Series Android PC
Manufacturer : PROMETHEAN LIMITED
Model Number : PRM-X6PRO-01
Operate Frequency : 2.402GHz~2.480GHz
Antenna Designation : WLAN/BT: PIFA Antenna 2dBi

Remark: /

3.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **QAM018** and IC: **5459A-018** filing to comply with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C and RSS-247 Issue 1(2015-05), RSS-Gen Issue 4(2014-11) Rules.

3.3. Block Diagram of EUT Configuration

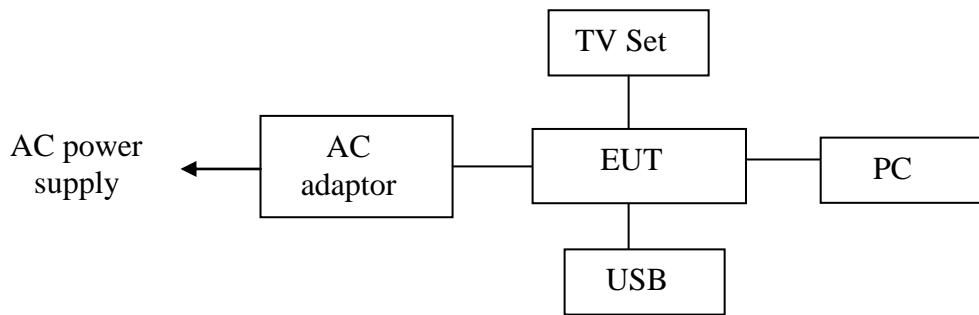


Figure 1 EUT setup

3.4. Operating Condition of EUT

The transmitter has a maximum peak conducted output power of Basic rate GFSK modulation and EDR mode 8DPSK modulation. Tests were performed with Basic rate GFSK modulation and EDR mode 8DPSK modulation.

3.5. Support Equipment List

Table 2 Support Equipment List

Name	Model No	S/N	Manufacturer
Adaptor for EUT	ICP12-050-2000D	--	Shenzhen Shi Yingyuan Electronics Co., Ltd.
Computer	9439	L3BDF2K	Lenovo
Keyboard (USB)	SK-8825 (L)	02553778	Lenovo
Mouse (USB)	MO28UOL	4418011108	Lenovo
Monitor	9227-AE1	V1TDB38	Lenovo
TV	KV-J21TF8	--	Sony
LCD TV	26L16SW	R145567	Skyworth

3.6. Test Conditions

Date of test : Apr.15,2016- May.10, 2016

Date of EUT Receive : Apr.11,2016

Temperature: -30-50 °C

Relative Humidity:48-56%

3.7. Special Accessories

Not available for this EUT intended for grant.

3.8. Equipment Modifications

Not available for this EUT intended for grant.

4. TEST EQUIPMENT USED

Table 3 Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB2603	EMI Test Receiver	Rohde & Schwarz	ESCS30	Dec.18, 2015	1 Year
SB3321	AMN	Rohde & Schwarz	ESH2-Z5	Jan.17, 2016	1 Year
SB2604	AMN	Rohde & Schwarz	ESH3-Z5	Nov.18, 2015	1 Year
SB8501/09	EMI Test Receiver	Rohde & Schwarz	ESU40	Mar.18, 2016	1 Year
SB8501/04	Bilog Antenna	Schwarzbeck	VULB9163	Mar.18, 2016	1 Year
SB5472/02	Trilog Broadband Antenna(30M-3GHz)	Schwarzbeck	VULB9163	Jan.07 ,2016	1 Year
SB3435	Horn Antenna	Rohde & Schwarz	HF906	Jan.18, 2016	1 Year
SB8501/01	Double-Ridged Waveguide Horn Antenna(1G~18GHz)	Rohde & Schwarz	HF907	Mar.21, 2016	1 Year
SB3345	Loop Antenna	Schwarzbeck	FMZB1516	Jan.20, 2015	2 Years
SB8501/17	Preamplifier	Rohde & Schwarz	SCU-18	Mar.26, 2016	1 Year
SB8501/16	Preamplifier	Rohde & Schwarz	SCU-26	Mar.26, 2016	1 Year
SB8501/11	Horn Antenna	ETS-Lindgren	3160-09	Mar.28,2016	1 Year
SB9721/05	Power Meter	Agilent	N1913A	Dec.28, 2015	1 Year
SB9721/06	Power Sensor	Agilent	E9304A	Dec.28, 2015	1 Year
SB9060	Signal Analyzer	Rohde & Schwarz	FSQ	Apr.25,2016	1 Year

5. CONDUCTED DISTURBANCE TEST

5.1. Test Standard and Limit

5.1.1. Test Standard

FCC Part 15 15.207
RSS-Gen Clause 6.6

5.1.2. Test Limit

Table 4 Conducted Disturbance Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

* Decreasing linearly with logarithm of the frequency

* The lower limit shall apply at the transition frequency.

5.2. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver (R&S Test Receiver ESCS30) is used to test the emissions form both sides of AC line. According to the requirements of ANSI C63.10-2013.

Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

The bandwidth of EMI test receiver is set at 9kHz.

5.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

5.4. Test Data

The emissions don't show in below are too low against the limits. Refer to the test curves.

Table 5 Conducted Disturbance Test Data

Model No.: PRM-X6PRO-01								
Test mode: Transmitting								
	Frequency (MHz)	Correction Factor (dB)	Quasi-Peak			Average		
			Reading (dB μ V)	Emission Level (dB μ V)	Limits (dB μ V)	Reading (dB μ V)	Emission Level (dB μ V)	Limits (dB μ V)
Line	0.15	9.7	42.3	49.5	66	28.8	38.5	56
	0.186	9.7	39.8	45.3	64.2	25.9	35.6	54.2
	0.214	9.7	35.6	42.4	63.0	23.6	33.3	53.0
	0.246	9.7	32.7	37.1	61.9	20.8	30.5	51.9
	0.29	9.7	27.4	42.5	60.5	14.2	23.9	50.5
	0.526	9.8	32.7	49.5	56	27.3	37.1	46
Neutral	0.15	9.7	43.8	53.5	66	34.2	43.9	56
	0.186	9.7	40.7	50.4	64.2	30.4	40.1	54.2
	0.214	9.7	37.0	46.7	63.0	28.7	38.4	53.0
	0.242	9.7	35.6	45.3	62.0	22.7	32.4	52.0
	0.414	9.7	28.7	38.4	57.6	21.5	31.2	47.6
	0.514	9.8	36.0	45.8	56	30.7	40.5	46

REMARKS: 1. Emission level(dBuV)=Read Value(dBuV) + Correction Factor(dB)

2. Correction Factor(dB) =LISN Factor (dB) + Cable Factor (dB)+Limiter Factor(dB)

3. The other emission levels were very low against the limit.

EUT: PRM-X6PRO-01

Manufacturer:


Operating Condition: Transmitting

Test Site:


Operator:

Test Specification: L

Comment: AC 120V/60Hz

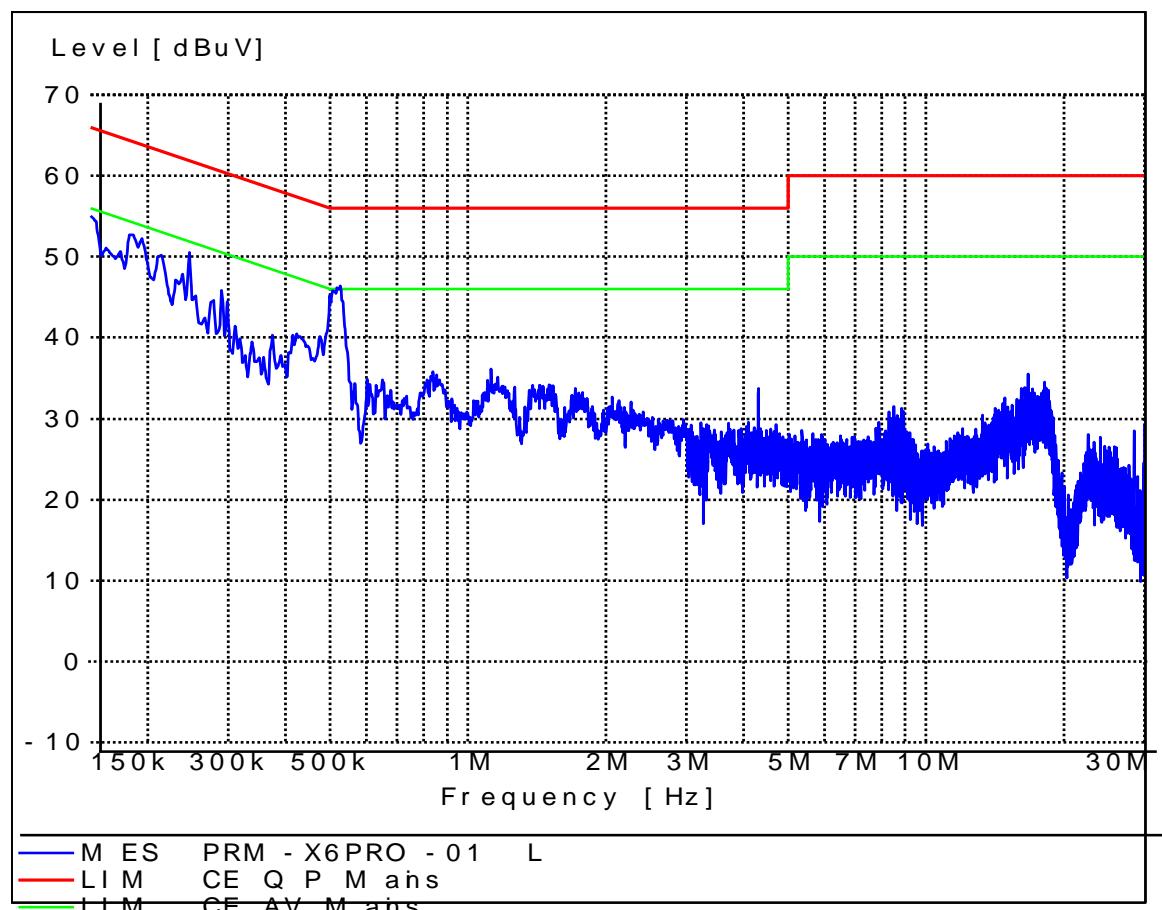

EUT: PRM-X6PRO-01
Manufacturer:
Operating Condition: Transmitting
Test Site:
Operator:
Test Specification: N
Comment: AC 120V/60Hz

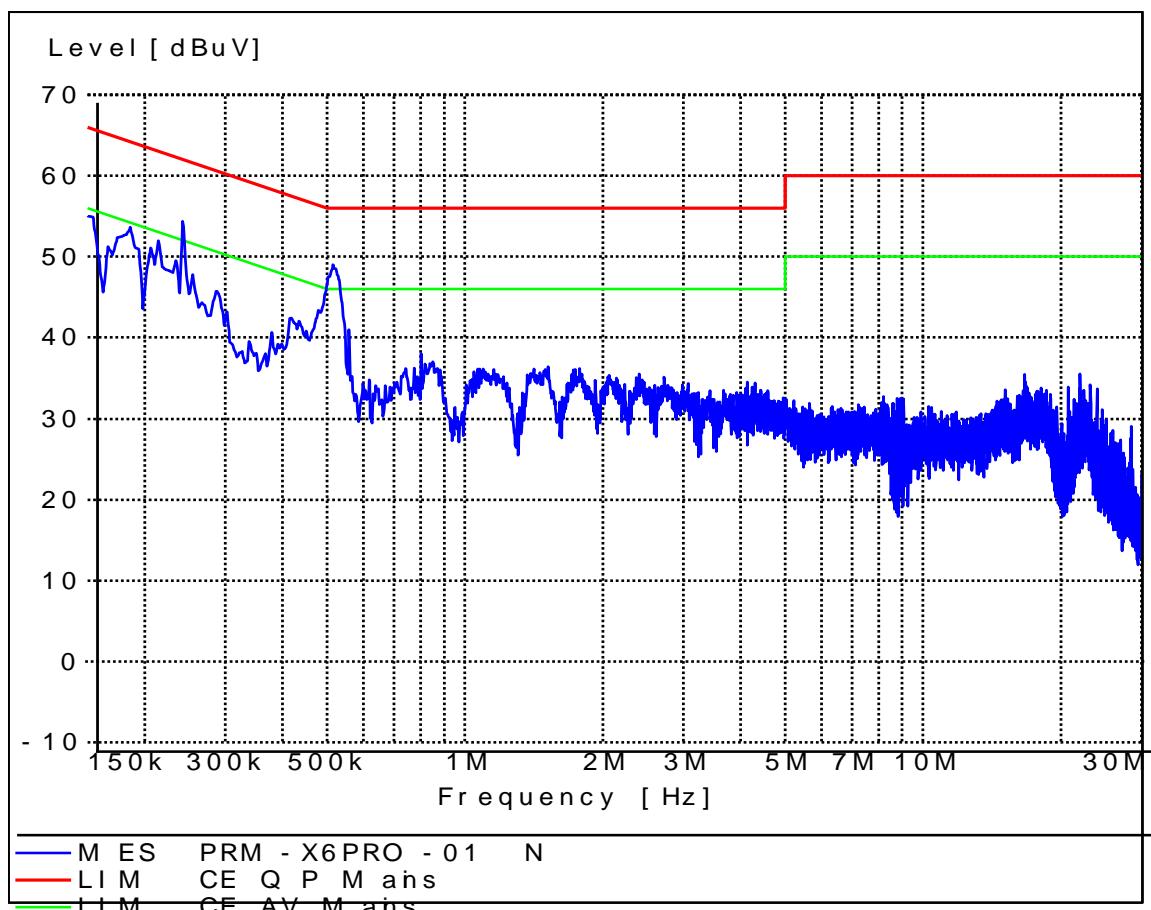

6. RADIATED DISTURBANCE TEST

6.1. Test Standard and Limit

6.1.1. Test Standard

FCC Part 15 15.209
RSS-247 Clause 5.5

6.1.2. Test Limit

Table 6 Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Table 7 Radiation Disturbance Test Limit for FCC (Class B)(Above 1G)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

* The lower limit shall apply at the transition frequency.

* The test distance is 3m.

6.2. Test Procedure

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10-2013. The EUT is set to transmit in a continuous mode. Radiated measurements were performed on the frequency range from 30MHz to 25GHz. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz, $VBW \geq RBW$. All readings above 1 GHz are AV and PK values. $RBW=1MHz$ and $1/T$ (10Hz) for AV value, $RBW=1MHz$ and $VBW \geq RBW$ for peak value. Measurements were made at 3 meters

6.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

6.4. Test Data

The emissions don't show in following result tables are more than 20dB below the limits.

Bluetooth basic rate and Bluetooth EDR mode were tested, below only shows worst case result of Bluetooth basic rate.

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Table 8 Radiated Emission Test Data 9k Hz-30MHz(worst case)

Frequency MHz	Cable Loss(dB)	Antenna Factor(d B)	Readings(d B μ V/m)	Level(dB μ V/m)	Polarity(H/V)	Turntable Angle(de g)	Antenna Height(m)	Limits(dB μ V/m)	Margin(d B)
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--

30MHz-1GHz

Worst case is shown below for 30MHz-1GHz only.

The emissions don't show in following result tables are more than 20dB below the limits.

Table 9 Radiated Emission Test Data 30MHz-1GHz

65.891	0.9	16.6	23.1	34.7	V	0	1.0	40	5.3
581.251	3.0	10.7	23.1	42.7	V	20	1.5	46	3.3
625.095	3.2	16.6	22.6	44.3	V	0	2.0	46	1.7
699.397	3.3	18.5	19.4	41.2	V	20	1.0	46	4.8
750.031	3.5	18.5	19.5	41.8	V	30	1.2	46	4.2
792.032	3.6	18.8	17.9	40.3	V	0	1.0	46	5.7
166.188	1.5	8.7	25.0	35.2	H	38	1.2	43.5	8.3
253.041	1.9	12.1	23.2	37.2	H	0	1.0	46	8.8
375.029	2.3	14.3	28.5	45.1	H	0	1.2	46	0.9
567.089	2.9	16.6	21.7	41.2	H	20	1.0	46	4.8
625.095	3.2	18.5	22.2	43.9	H	0	1.7	46	2.1
891.069	3.9	20.1	17.2	41.2	H	0	1.0	46	4.8

Radiated Emission


EUT Information

EUT Model Name: PRM-X6PRO-01
Operation mode: Transmitting
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

Field strength 30M-1GHz 1F 3m chamber

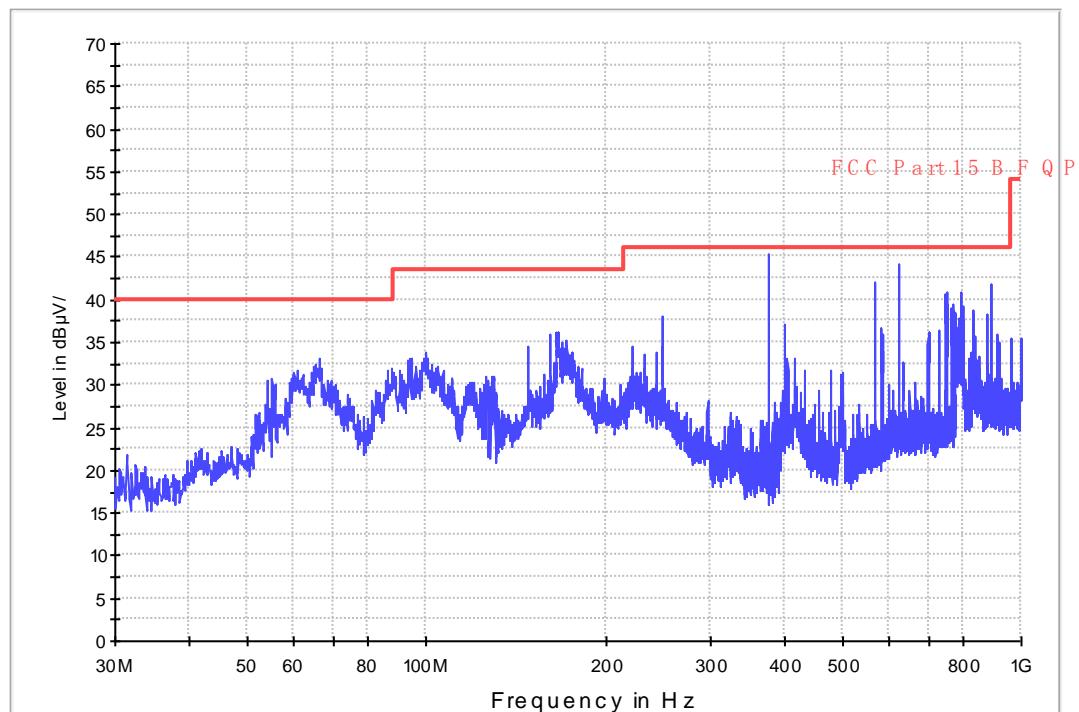

Radiated Emission


EUT Information

EUT Model Name: PRM-X6PRO-01
Operation mode: Transmitting
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

Field strength 30M-1GHz 1F 3m chamber

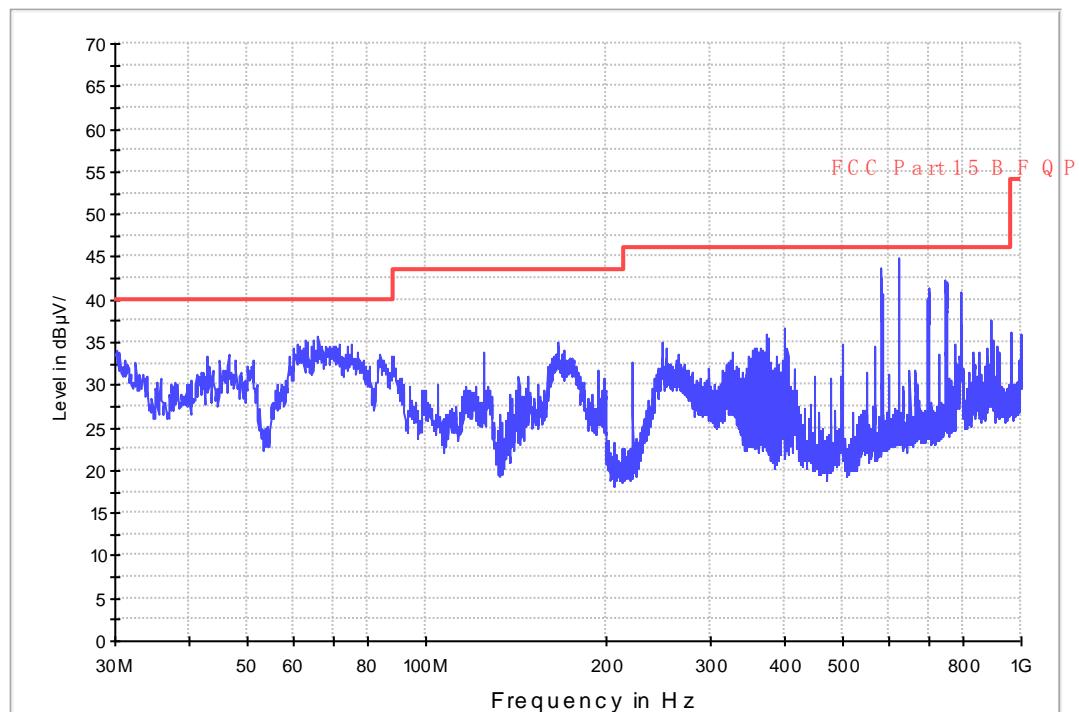

1GHz-18GHz

BDR CH0

Radiated Emission


EUT Information

EUT Model Name: PRM-X6PRO-01
Operation mode: BDR CH0
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

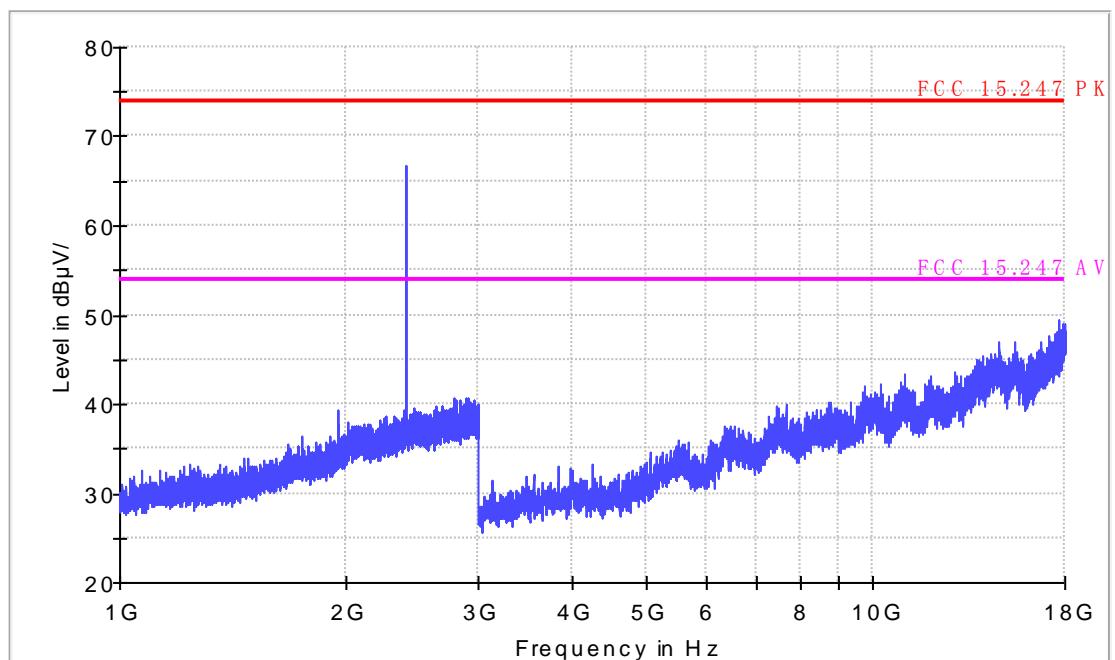

Radiated Emission


EUT Information

EUT Model Name: PRM-X6PRO-01
Operation mode: BDR CH0
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

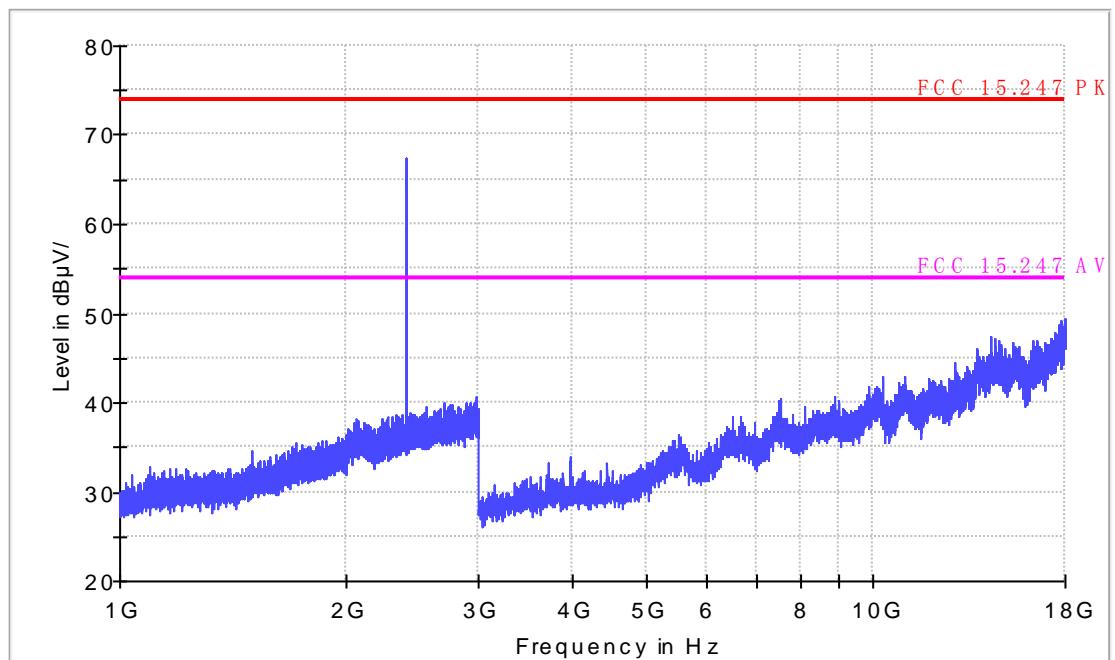

1GHz-18GHz

BDR CH39

Radiated Emission


EUT Information

EUT Model Name: PRM-X6PRO-01
Operation mode: BDR CH39
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

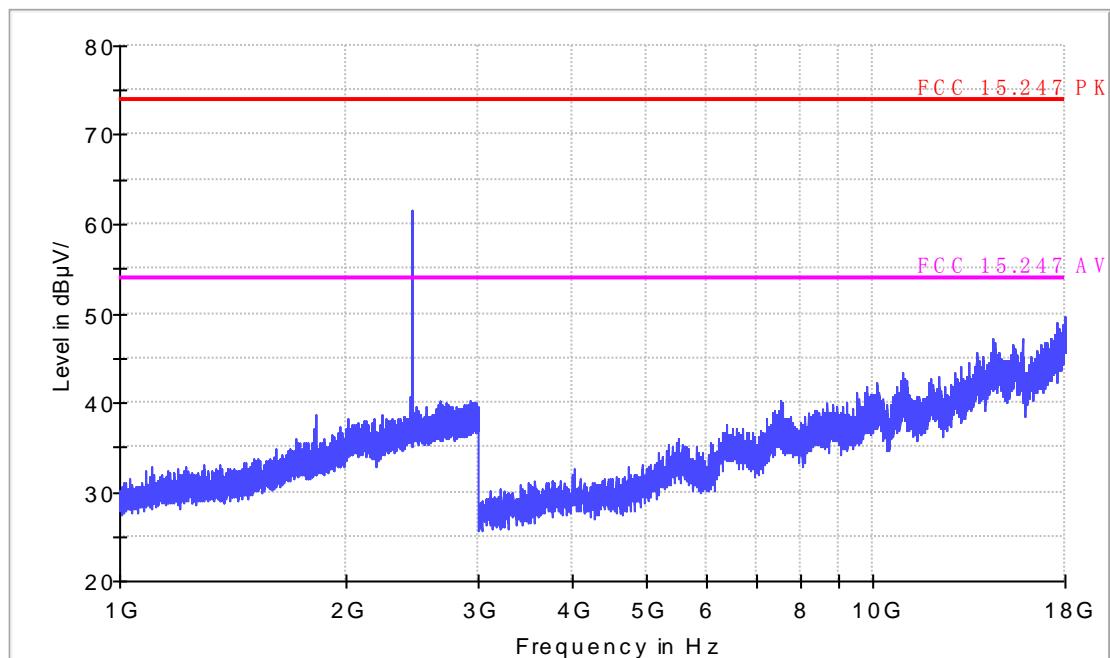

Radiated Emission


EUT Information

EUT Model Name: PRM-X6PRO-01
Operation mode: BDR CH39
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

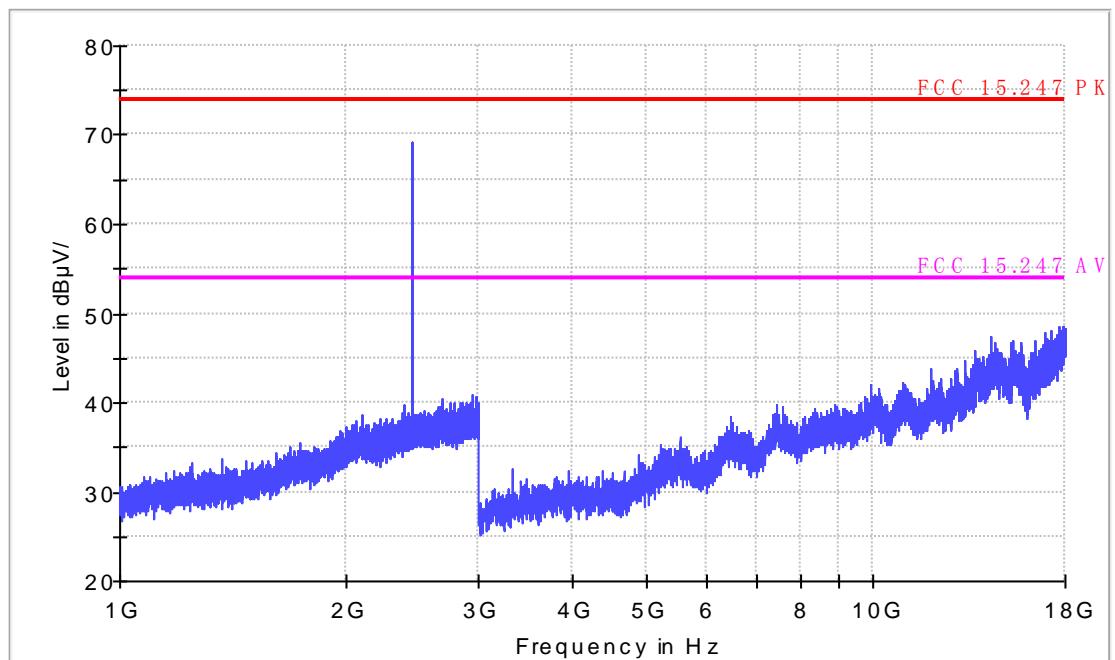

1GHz-18GHz

BDR CH78

Radiated Emission


EUT Information

EUT Model Name: PRM-X6PRO-01
Operation mode: BDR CH78
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

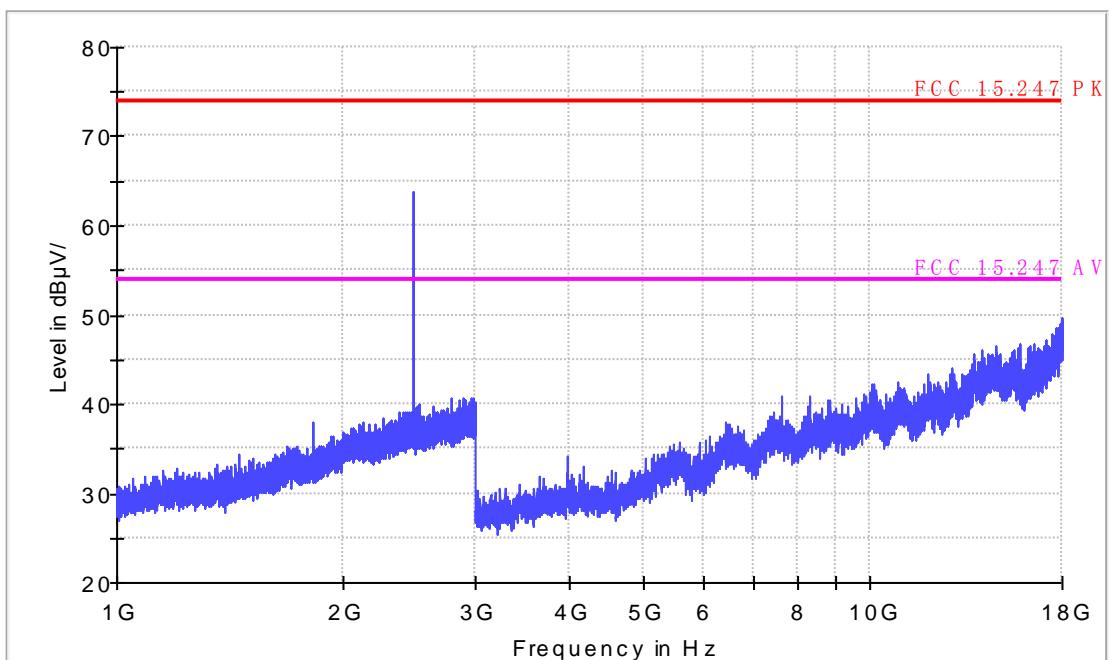

Radiated Emission


EUT Information

EUT Model Name: PRM-X6PRO-01
Operation mode: BDR CH78
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

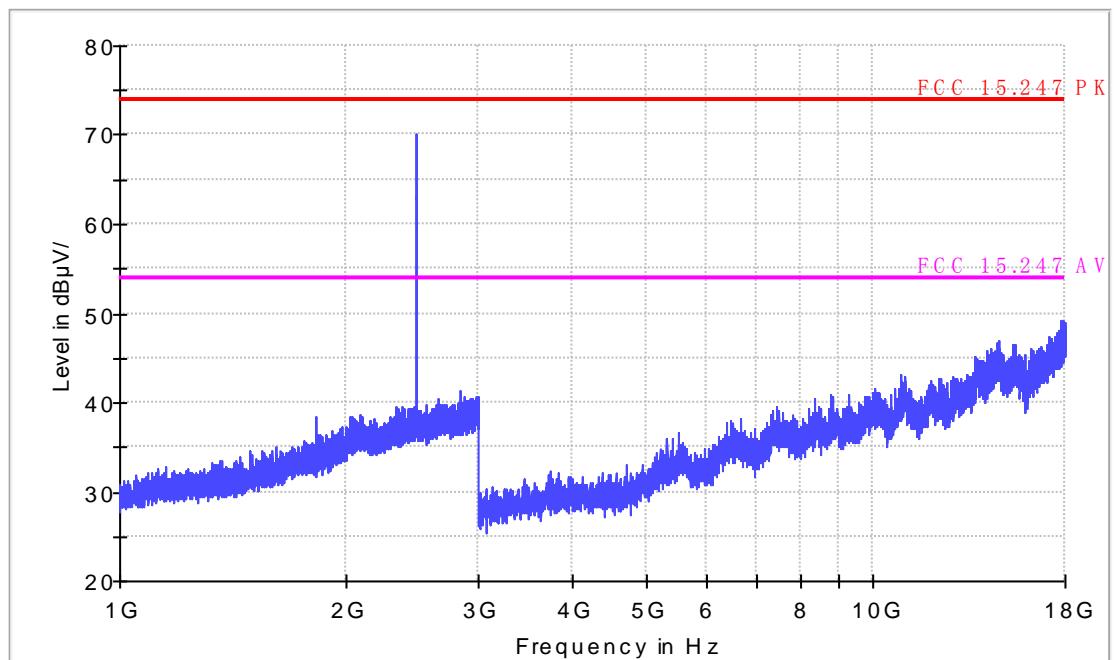

1GHz-18GHz

EDR CH0

Radiated Emission


EUT Information

EUT Model Name: PRM-X6PRO-01
Operation mode: EDR CH0
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

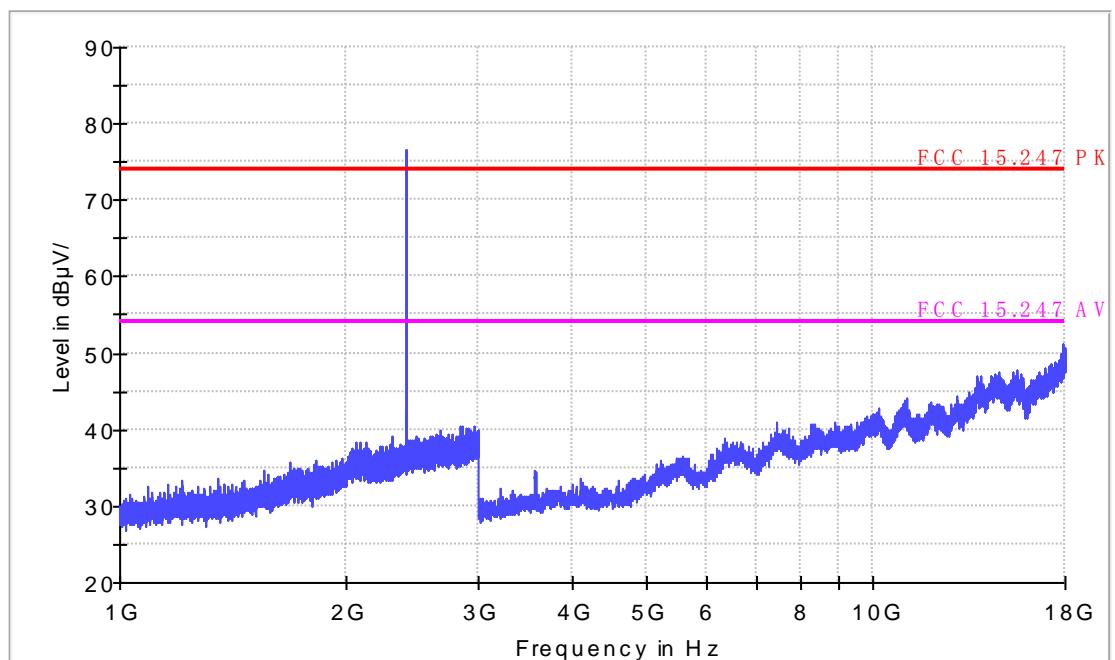

Radiated Emission


EUT Information

EUT Model Name: PRM-X6PRO-01
Operation mode: EDR CH0
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

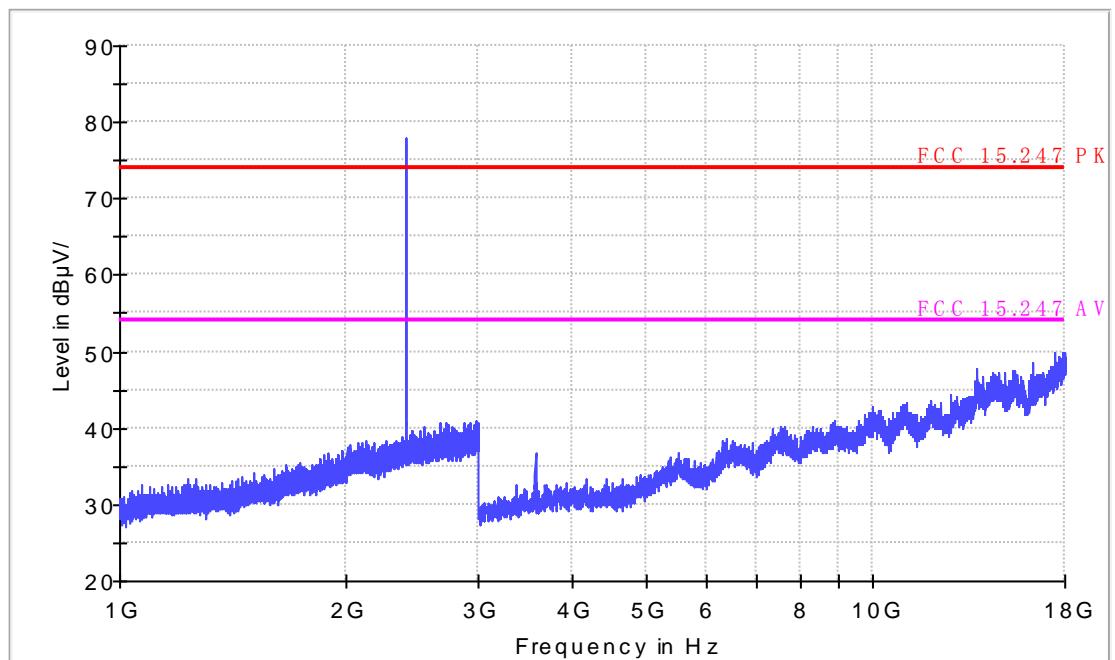

1GHz-18GHz

EDR CH39

Radiated Emission


EUT Information

EUT Model Name: PRM-X6PRO-01
Operation mode: EDR CH39
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

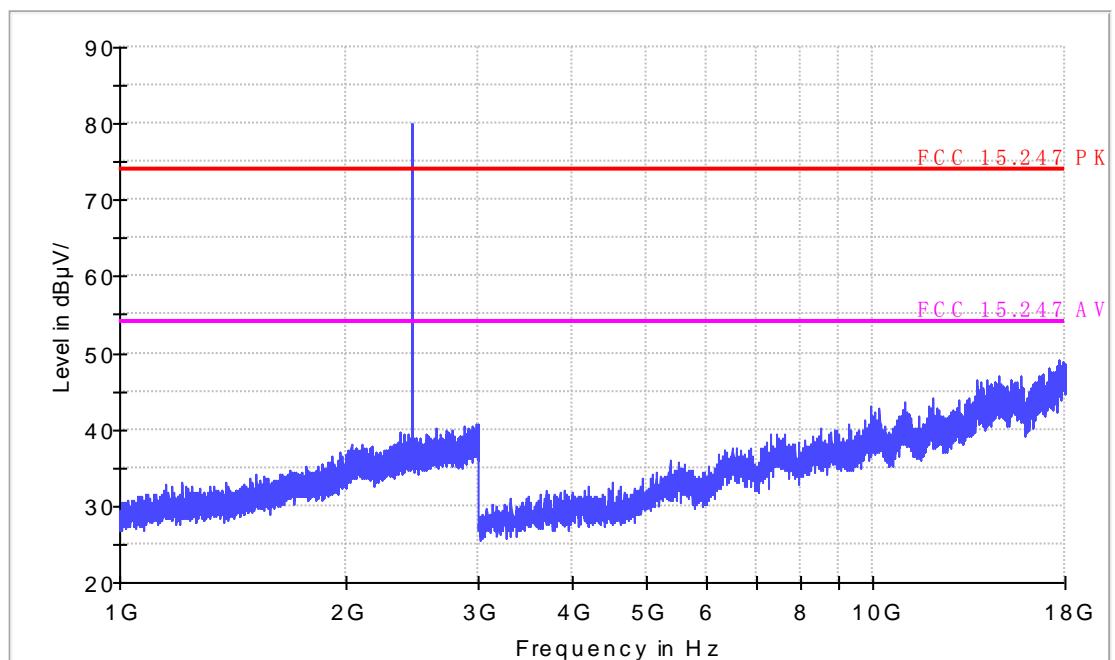

Radiated Emission


EUT Information

EUT Model Name: PRM-X6PRO-01
Operation mode: EDR CH39
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

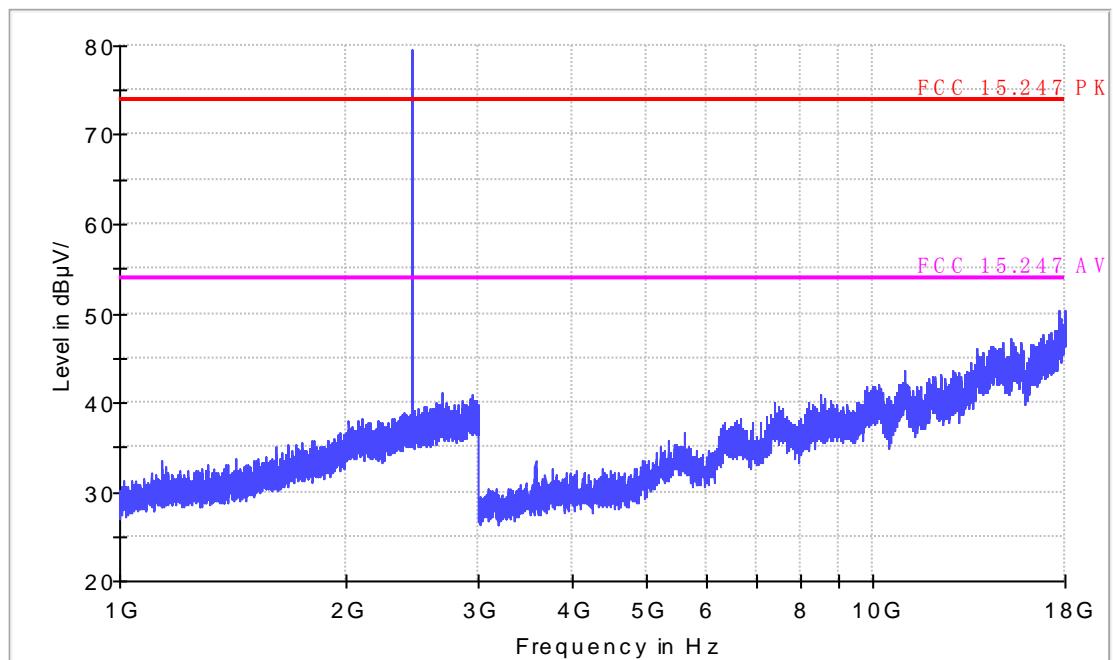

1GHz-18GHz

EDR CH78

Radiated Emission


EUT Information

EUT Model Name: PRM-X6PRO-01
Operation mode: EDR CH78
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

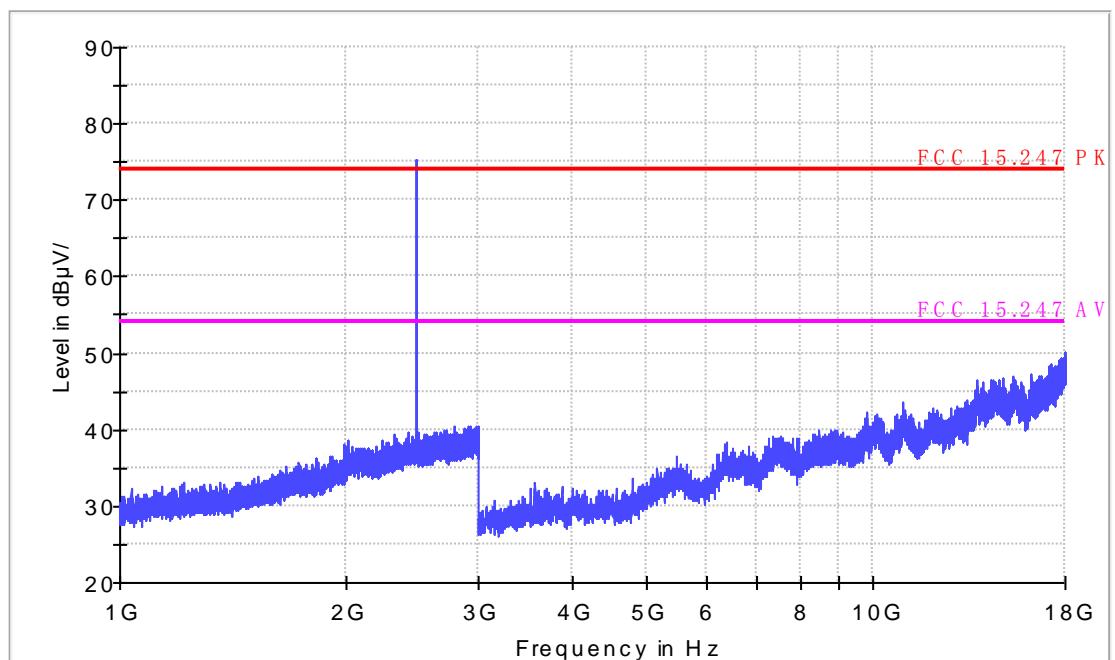

Radiated Emission


EUT Information

EUT Model Name: PRM-X6PRO-01
Operation mode: EDR CH78
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

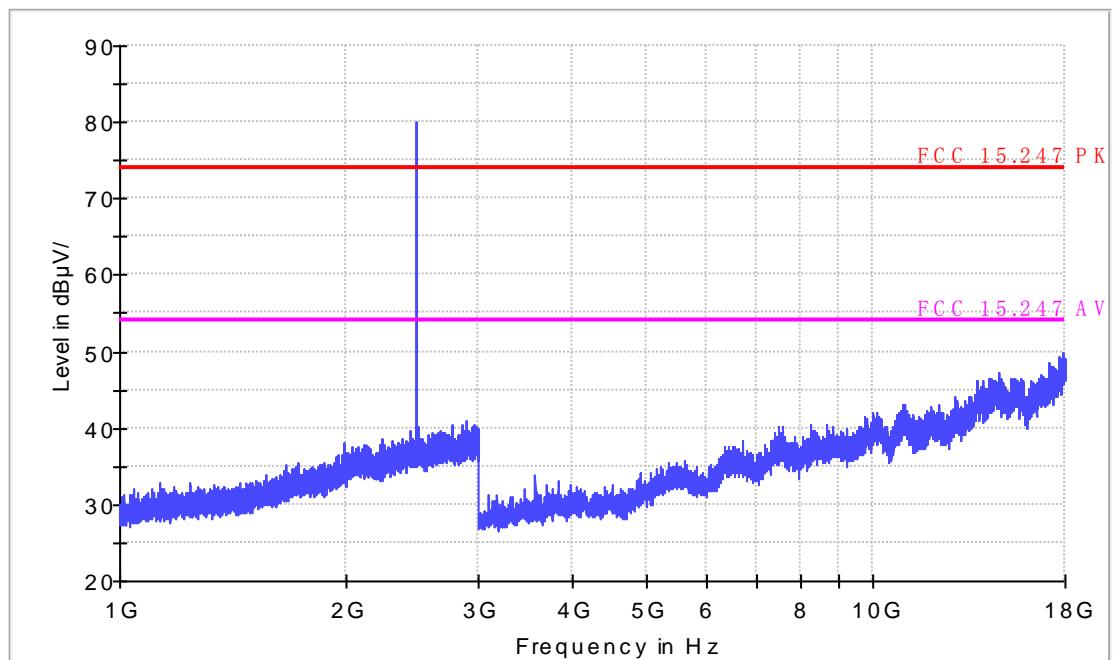

18-25GHz

No Peak found in pre-scan, only worst case result is listed in this report.

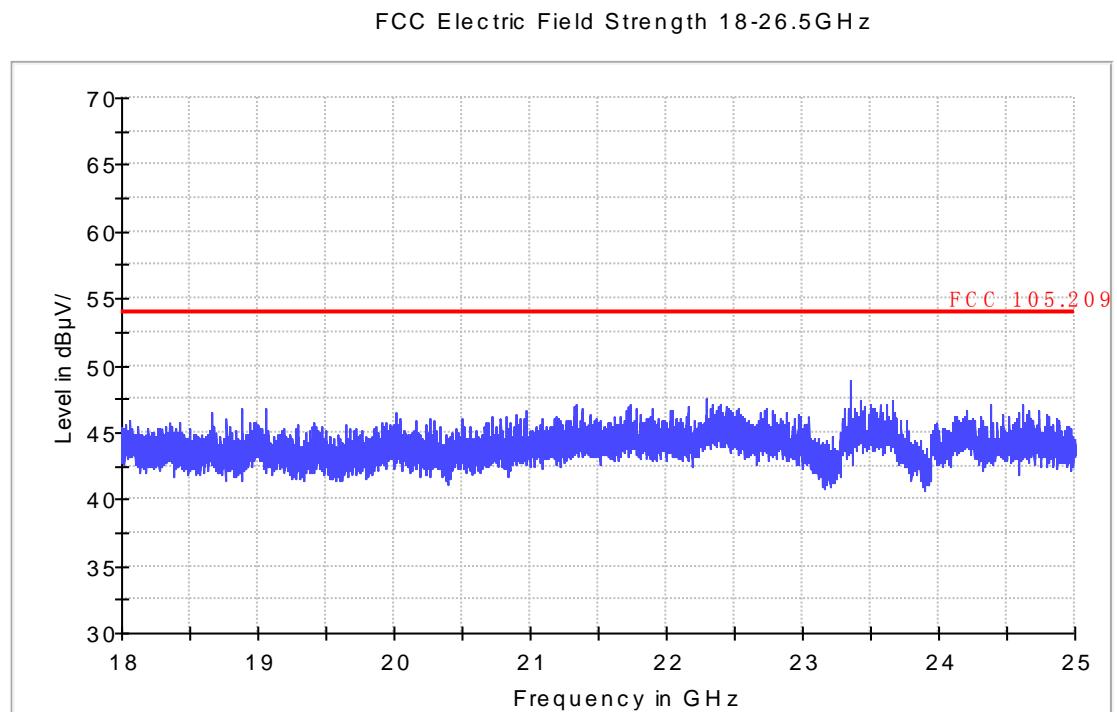


Table 10 Restricted Band Radiated Emission Data

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	
6.31175 - 6.31225	123 - 138	2200 - 2300	
8.291 - 8.294	149.9 - 150.05	2310 - 2390	
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	
12.29 - 12.293	167.72 - 173.2	3332 - 3339	
12.51975	-	3345.8 - 3358	
12.52025	240 - 285	3600 - 4400	
12.57675	-		
12.57725			
13.36 - 13.41			

Except as shown in table 9 to table 15, all other emission of the above band were less than the limit 20dB.

7. 20DB BANDWIDTH MEASUREMENT

7.1. LIMITS OF 20dB BANDWIDTH MEASUREMENT

CFR 47 (FCC) part 15.247 (a) (1) and DA 00-705
RSS-247 Clause 5.1(1)

7.2. TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and $VBW \geq RBW$. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


7.3. TEST SETUP




7.4. Test Data

Table 11 20dB Bandwidth Test Data Modulation: GFSK


CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)	results
2402	0.9281	Pass
2441	0.9331	Pass
2480	0.9381	Pass

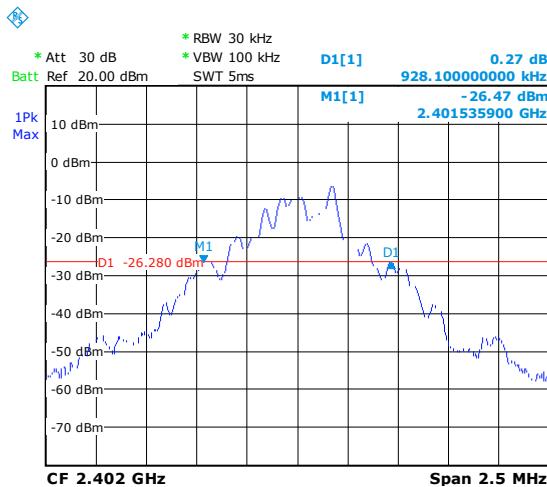

Date: 13.DEC.2007 01:33:18

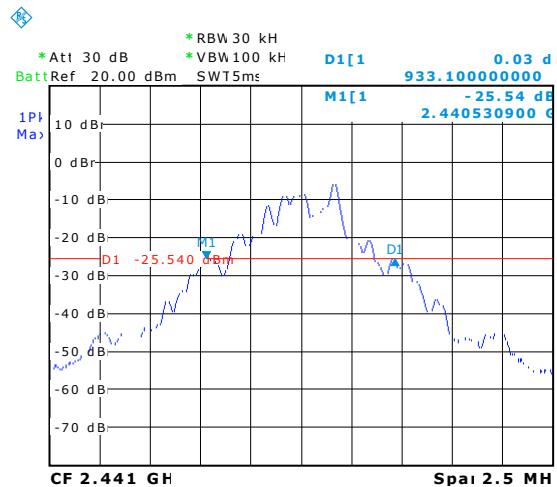


Date: 13.DEC.2007 01:38:24

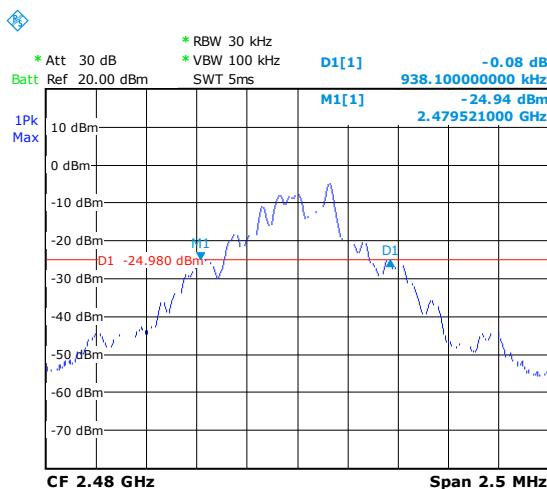


Date: 13.DEC.2007 01:36:29

Table 12 20dB Bandwidth Test Data Modulation: 8DPSK


CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)	results
2402	1.2575	Pass
2441	1.2625	Pass
2480	1.2675	Pass

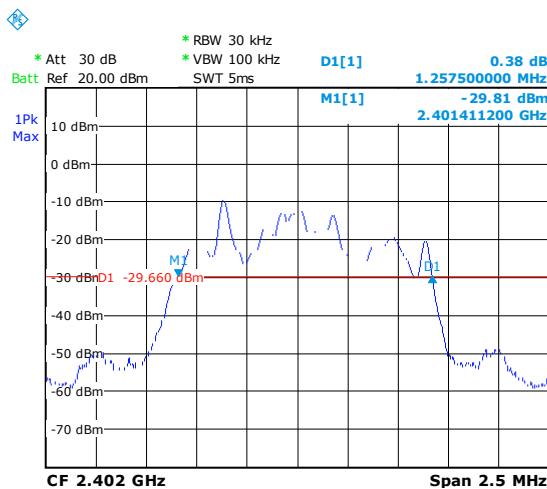

Date: 13.DEC.2007 01:40:14

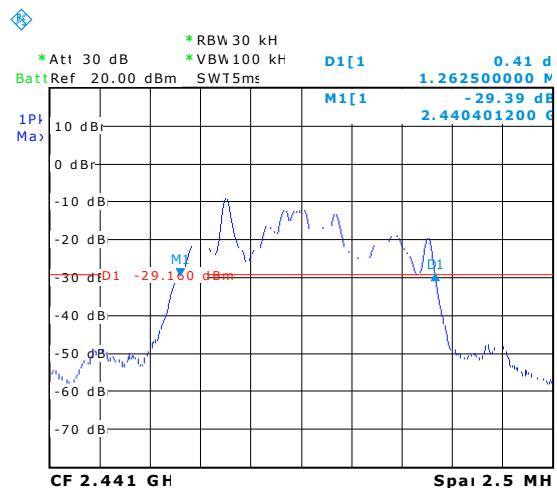

Date: 13.DEC.2007 01:41:49

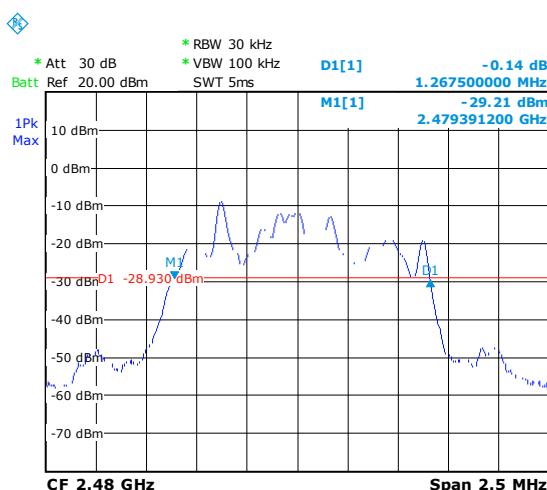

Date: 13.DEC.2007 01:43:58

8. CARRIER FREQUENCY SEPARATION MEASUREMENT

8.1. LIMITS OF Carrier frequency separation measurement

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

8.2. TEST PROCEDURES

- (a) Connect test port of EUT to spectrum analyzer and universal communication tester.
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch off frequency hopping function, then set the measured frequency number to two adjacent channels separately and test the carrier frequency separation with spectrum analyzer.



8.3. TEST SETUP



8.4. Test Data


Basic Rate

Frequency [GHz]	Frequency [GHz]	frequency separation [MHz]	Limit [MHz]	Result
2.402	2.403	1.0	0.625	Pass
2.441	2.442	1.005	0.625	Pass
2.479	2.480	1.005	0.625	Pass

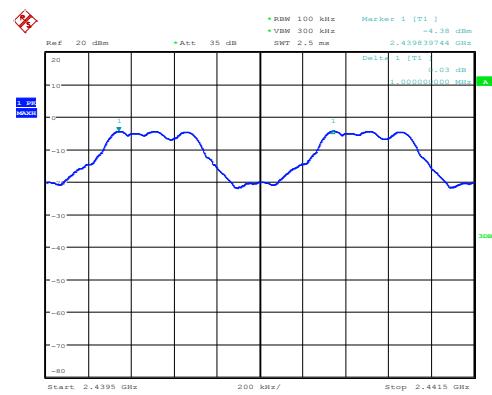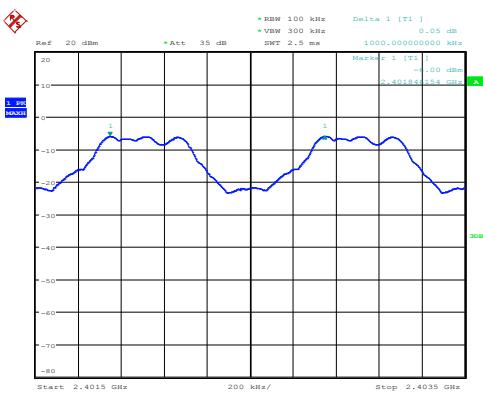

Date: 9.MAY.2016 14:39:29


Date: 9.MAY.2016 14:42:38

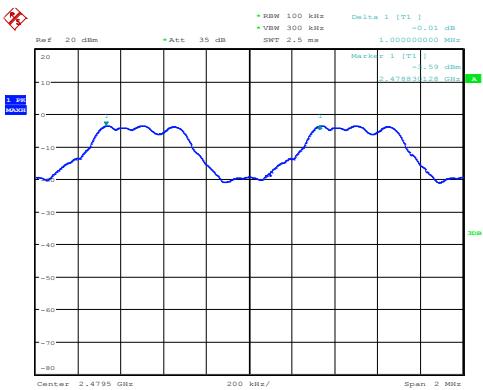


Date: 9.MAY.2016 14:43:47

EDR


Frequency [GHz]	Frequency [GHz]	frequency separation [MHz]	Limit [MHz]	Result
2.402	2.403	1.0	0.845	Pass
2.441	2.442	1.0	0.845	Pass
2.479	2.480	1.003	0.845	Pass

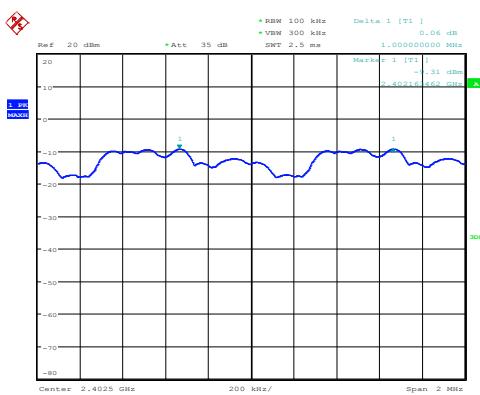

Date: 9.MAY.2016 14:46:59

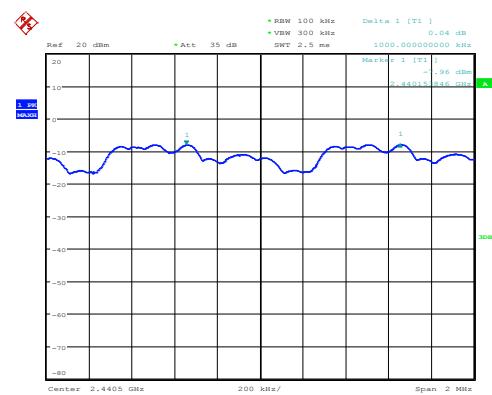

Date: 9.MAY.2016 14:51:14

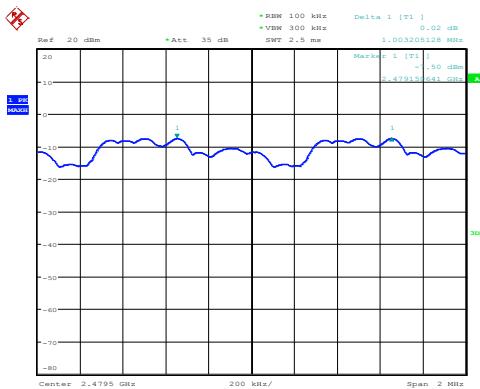

Date: 9.MAY.2016 14:52:09

9. NUMBER OF HOPPING CHANNEL


9.1. LIMITS OF 9. NUMBER OF HOPPING CHANNEL

Number of hopping channel should be compliance with the requirements in part15.247 (a) (1) iii.

9.2. TEST PROCEDURE

- (a) Connect test port of EUT to spectrum analyzer
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch on frequency hopping function, then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer.
- (c) Count the quantity of peaks to get the number of hopping channels.

9.3. TEST SETUP

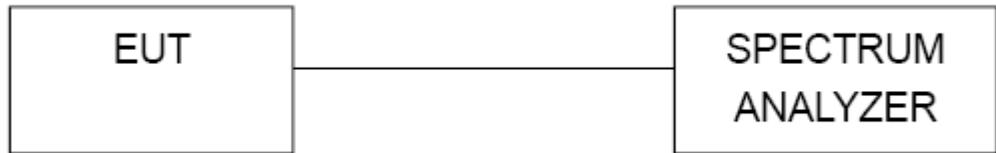


9.4. Test Data



Table 18 Hopping channel number Test Data

Hopping numbers	LIMIT	results
79	>15	Pass

Basic

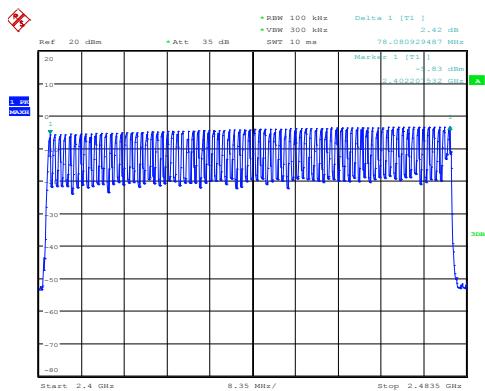

EDR

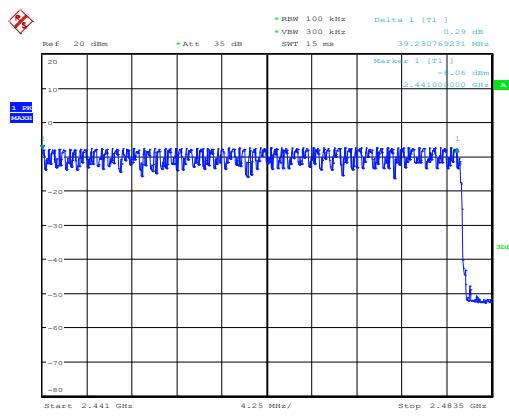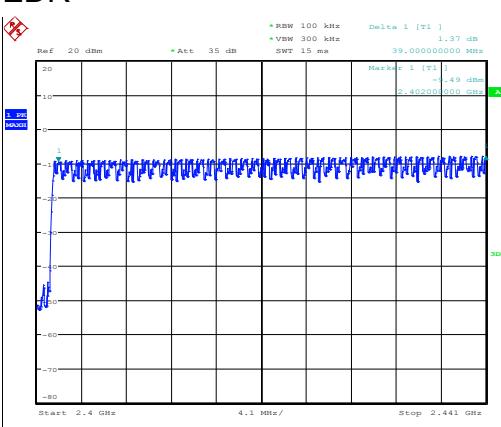

10. TIME OF OCCUPANCY

10.1. LIMITS OF TIME OF OCCUPANCY

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

10.2. TEST PROCEDURE



- (a) Connect test port of EUT to spectrum analyzer and universal communication tester.
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch on frequency hopping function.
- (c) Set the span of spectrum analyzer to 0 Hz, and set the resolution bandwidth to 1 MHz and the video bandwidth to 1 MHz, then get the time domain measured diagram. and set sweep time to 2 times of one burst occupancy time, and measure the time of occupancy of one burst.
- (d) Set the resolution bandwidth to 1 MHz and the video bandwidth to 3 MHz ,and set the sweep time to a period (0.4 seconds multiplied by the number of hopping channels employed), and count the number of the bursts.
- (e) Calculate the time of occupancy in a period with time occupancy of a burst and quantity of bursts.

10.3. TEST RESULTS

GFSK

	Time of Single Slot [ms]	Numbers of slots in a period	Time of occupied in a period [s]	Limit [s]	Result
DH1	0. 402	32	0. 1286	≤ 0.4	Pass
DH3	1. 660	17	0. 2822	≤ 0.4	Pass
DH5	2. 917	11	0. 3792	≤ 0.4	Pass



DH1

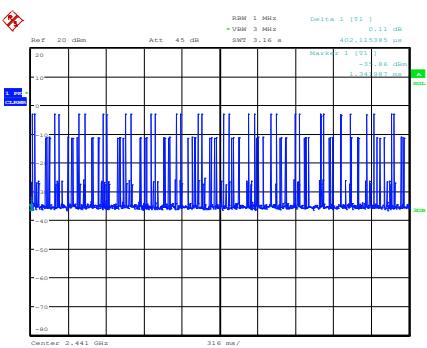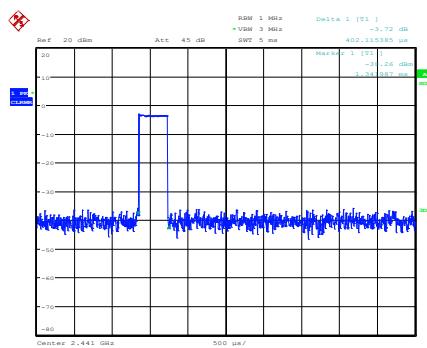

Date: 10.MAY.2016 10:36:46

Date: 10.MAY.2016 10:37:36



DH3

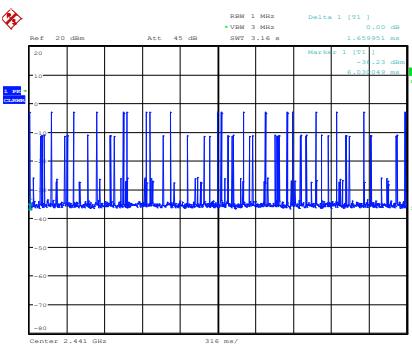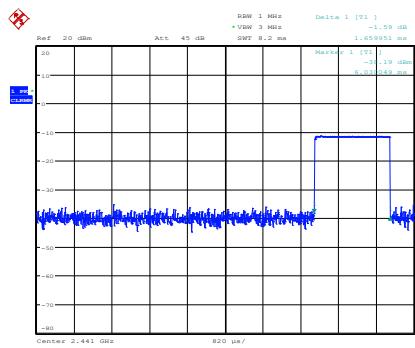

Date: 10.MAY.2016 10:50:07

Date: 10.MAY.2016 10:51:10

DH5

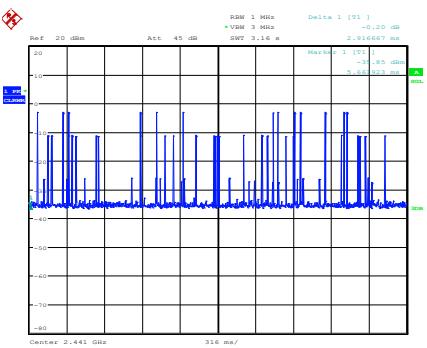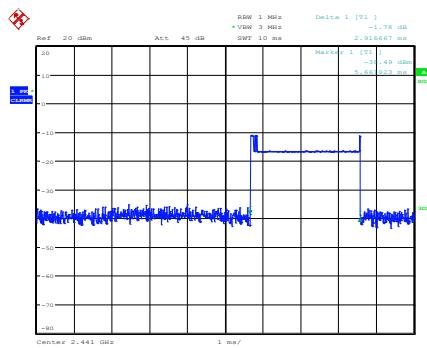


Date: 10.MAY.2016 10:52:17

Date: 10.MAY.2016 10:53:00


8DPSK

	Time of Single Slot [ms]	Numbers of slots in a period	Time of occupied in a period [s]	Limit [s]	Result
3-DH1	0.417	31	0.1293	≤ 0.4	Pass
3-DH3	1.683	17	0.2861	≤ 0.4	Pass
3-DH5	2.923	13	0.3780	≤ 0.4	Pass

3-DH1

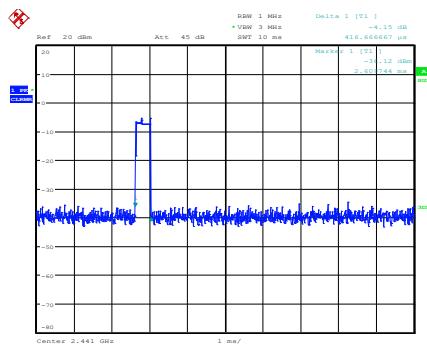


Date: 10.MAY.2016 10:54:58

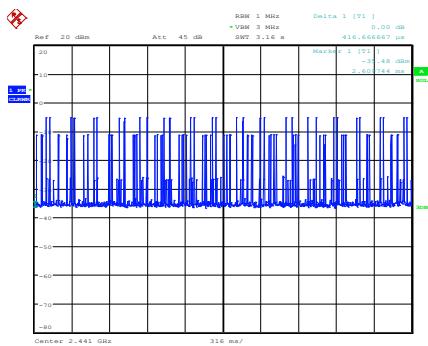


Date: 10.MAY.2016 10:55:12

3-DH3

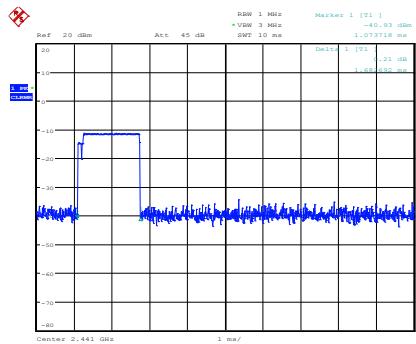


Date: 10.MAY.2016 10:56:07

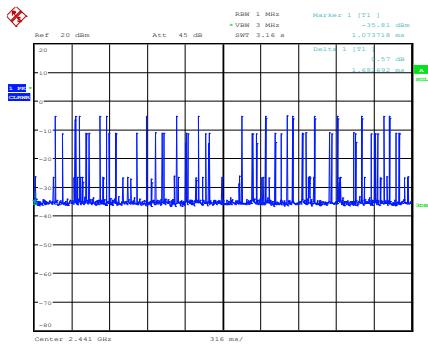


Date: 10.MAY.2016 10:56:28

3-DH5

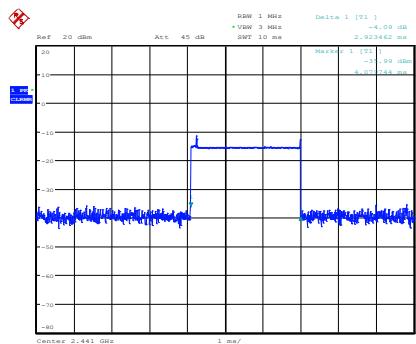

Date: 10.MAY.2016 10:57:33

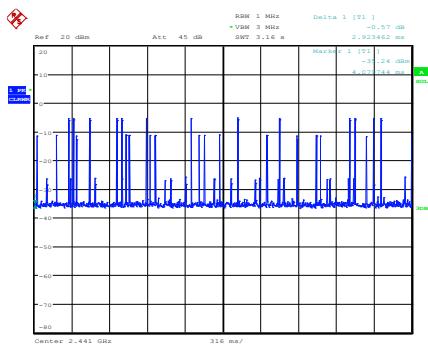

Date: 10.MAY.2016 10:57:54

11. PEAK POWER

11.1. LIMITS OF Peak Power

Compliance with part 15.247 (b) (1)& RSS-247Clause 5.4(2), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watt.




11.2. TEST PROCEDURE

- (a) Connect test port of EUT to universal communication tester.
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch off frequency hopping function.
- (c) Then set the EUT to transmit at high, middle and low frequency and measure the conducted output power separately.

11.3. TEST RESULTS


Measurement Results (Modulation:GFSK)

Channel	Channel No.	Center Freq. [MHz]	Meas. Level (Cond.) [dBm]	Limit [dBm]	Result
Bottom	0	2402	-4.36	< 30	Pass
Middle	39	2441	-2.81	< 30	Pass
Top	78	2480	-2.00	< 30	Pass

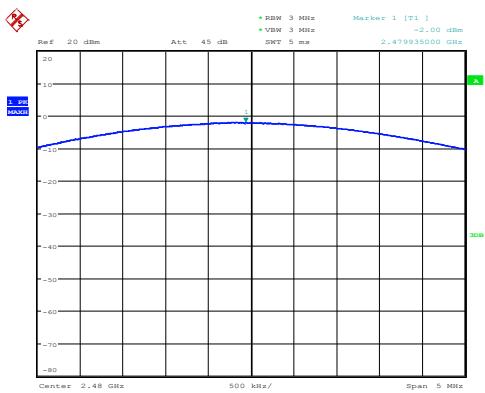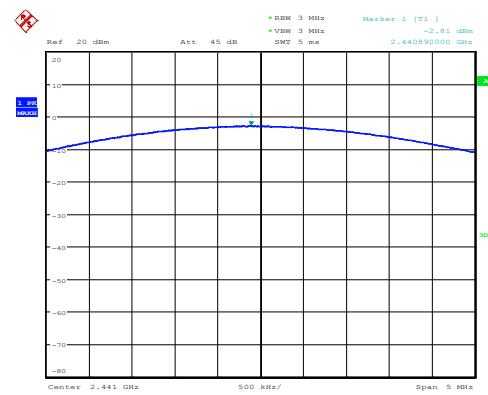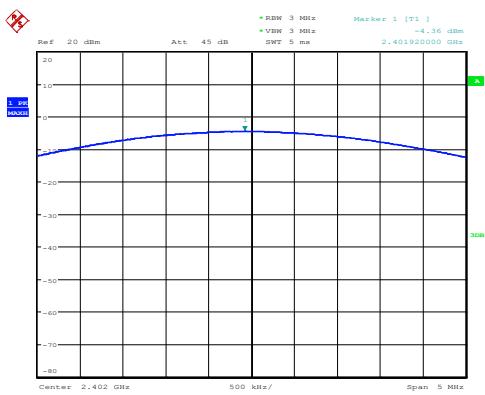


Measurement Results (Modulation: 8DPSK)


Channel	Channel No.	Center Freq. [MHz]	Meas. Level (Cond.) [dBm]	Limit [dBm]	Result
Bottom	0	2402	-5.52	< 21	Pass
Middle	39	2441	-4.41	< 21	Pass
Top	78	2480	-3.66	< 21	Pass

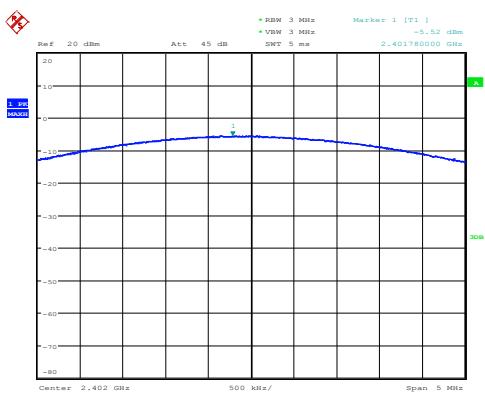

Date: 10.MAY.2016 11:07:13

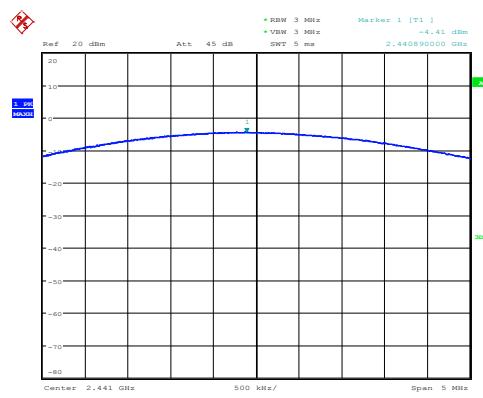

Date: 10.MAY.2016 11:08:11

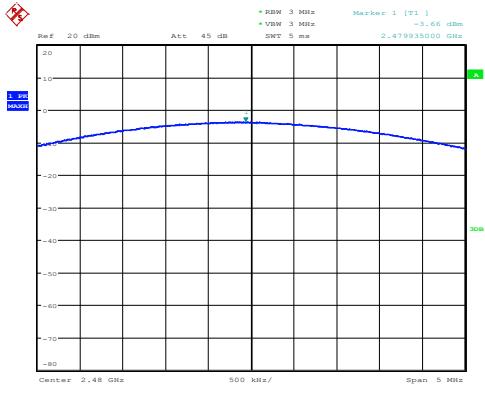

Date: 10.MAY.2016 11:08:53

12. BAND EDGES MEASUREMENT

12.1. Limits of Band Edges Measurement

Below –20dB of the highest emission level of operating band (in 100kHz resolution bandwidth).

12.2. TEST PROCEDURE

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

12.3. Test Results


The measured plots are attached on the following. Test data shows compliance with the band edge requirement in part 15.247(d).

Bluetooth Basic Rate


Low edge

Horizontal

FCC Electric Field Strength 2.4GHz Bandedge-PK

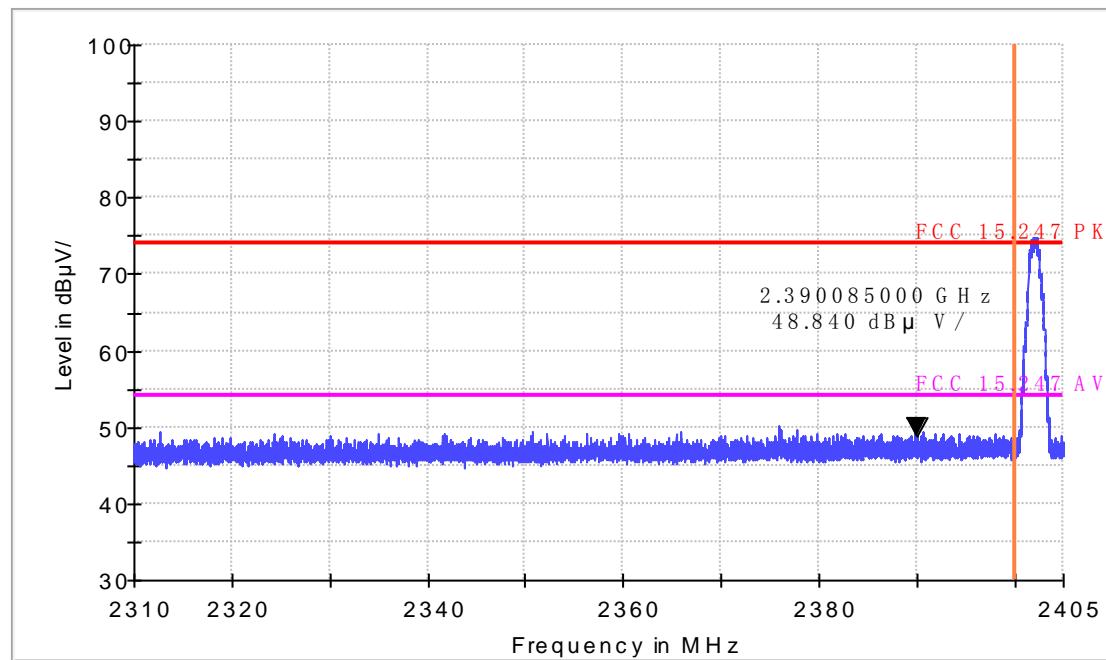


FCC Electric Field Strength 2.4GHz Bandedge-AV

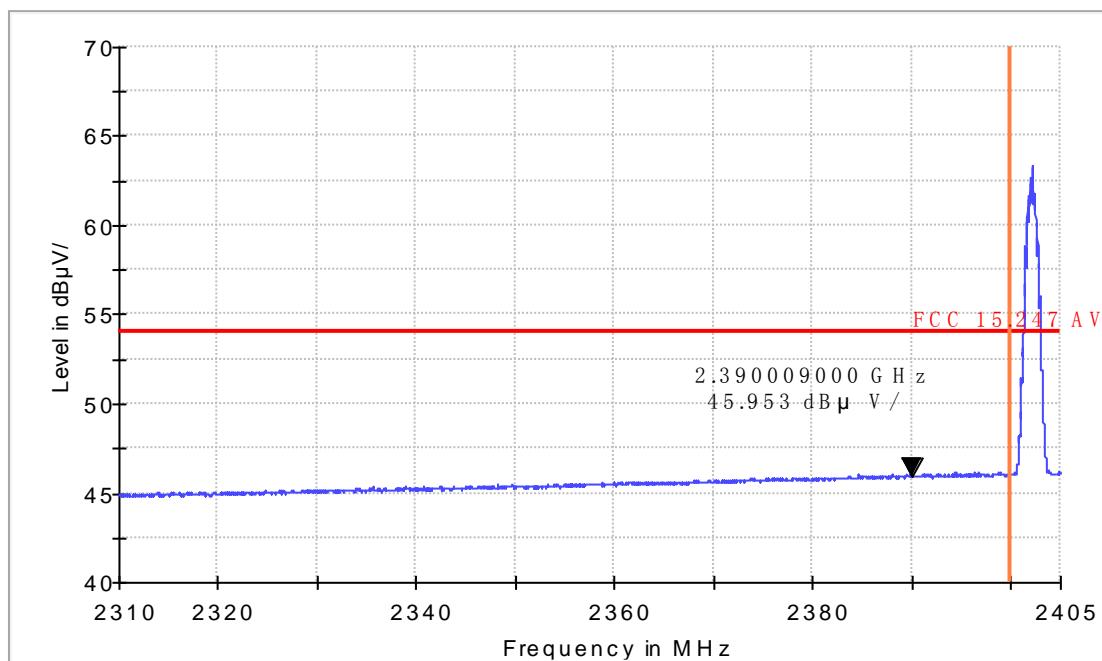


Vertical

FCC Electric Field Strength 2.4GHz Bandedge-PK

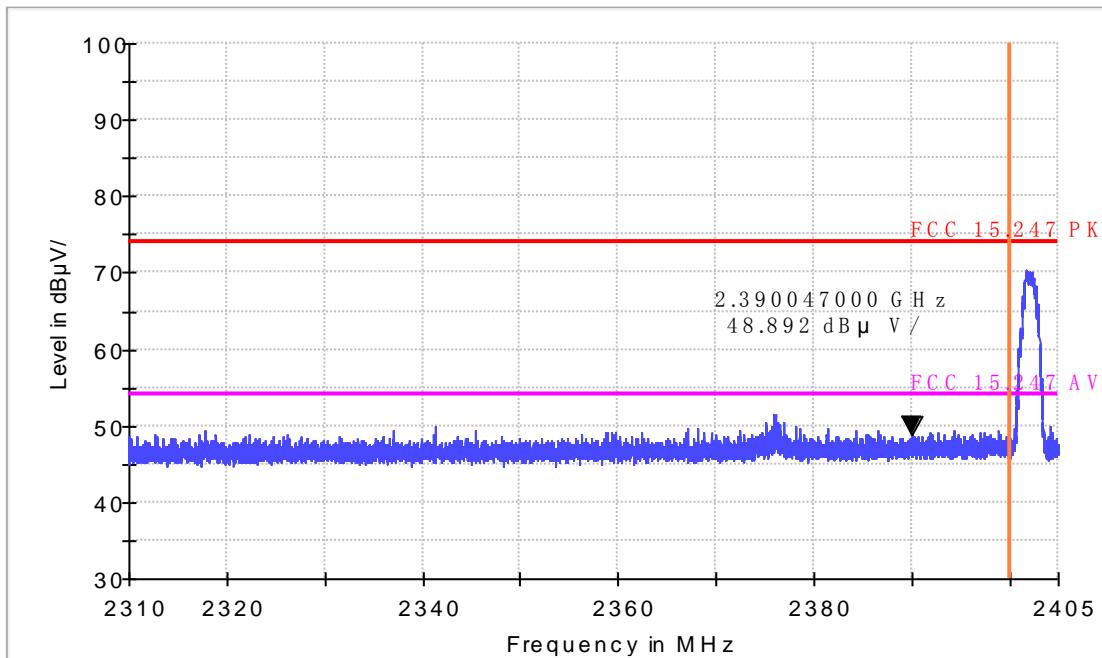


FCC Electric Field Strength 2.4GHz Bandedge-AV

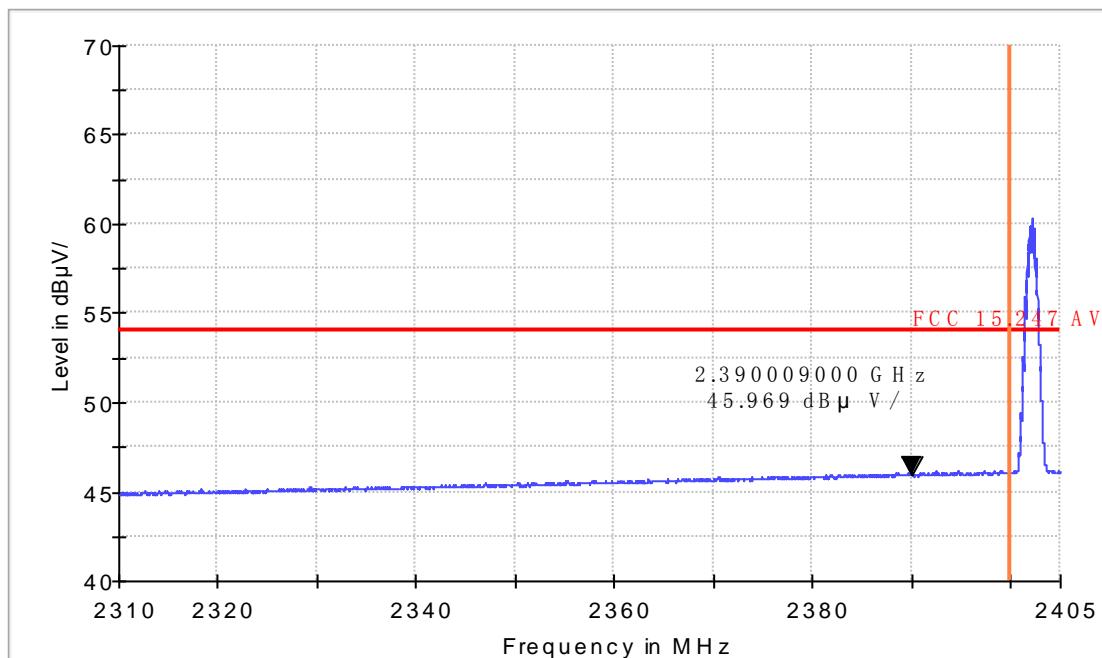


Upper Edge

Horizontal

FCC Electric Field Strength 2.4GHz Bandedge-PK

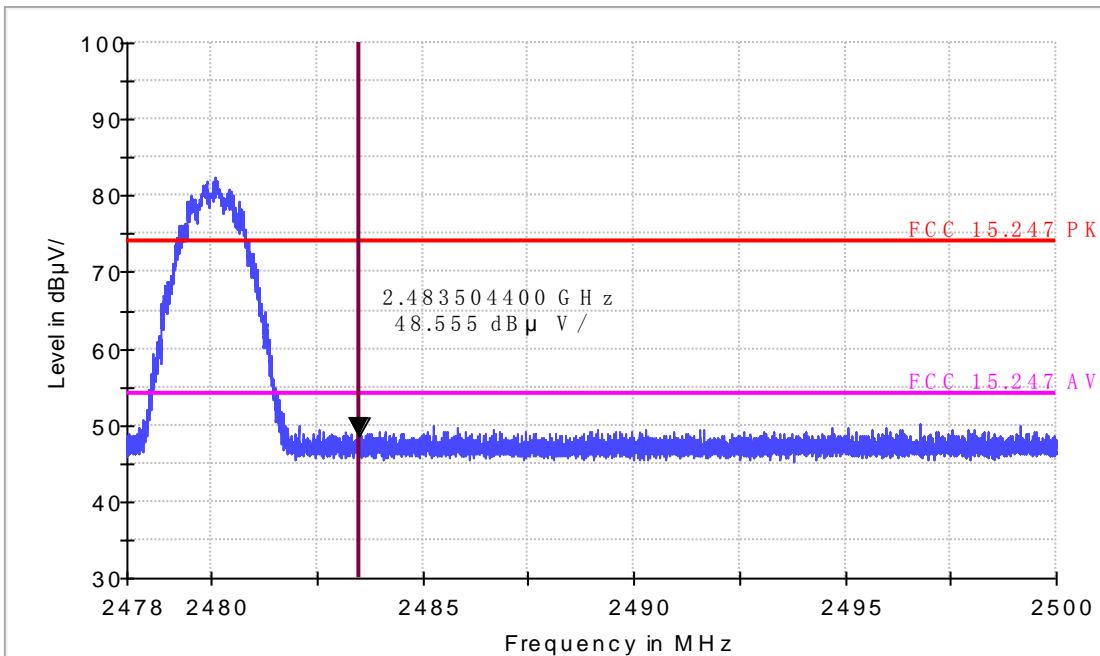


FCC Electric Field Strength 2.4GHz Bandedge-AV

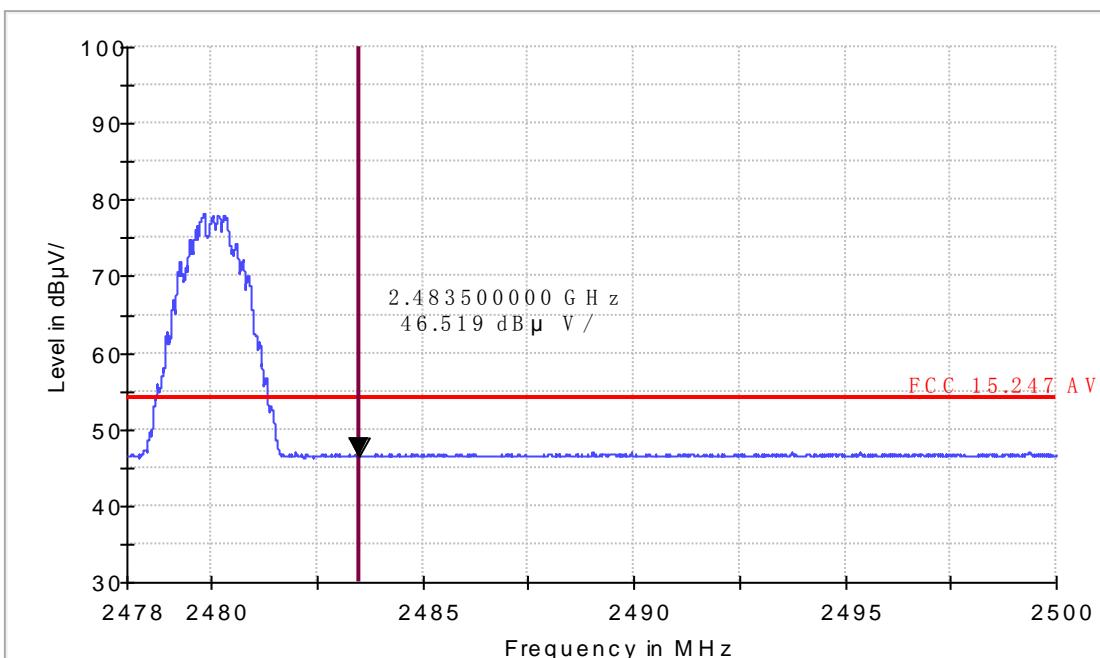


Vertical

FCC Electric Field Strength 2.4GHz Bandedge-PK

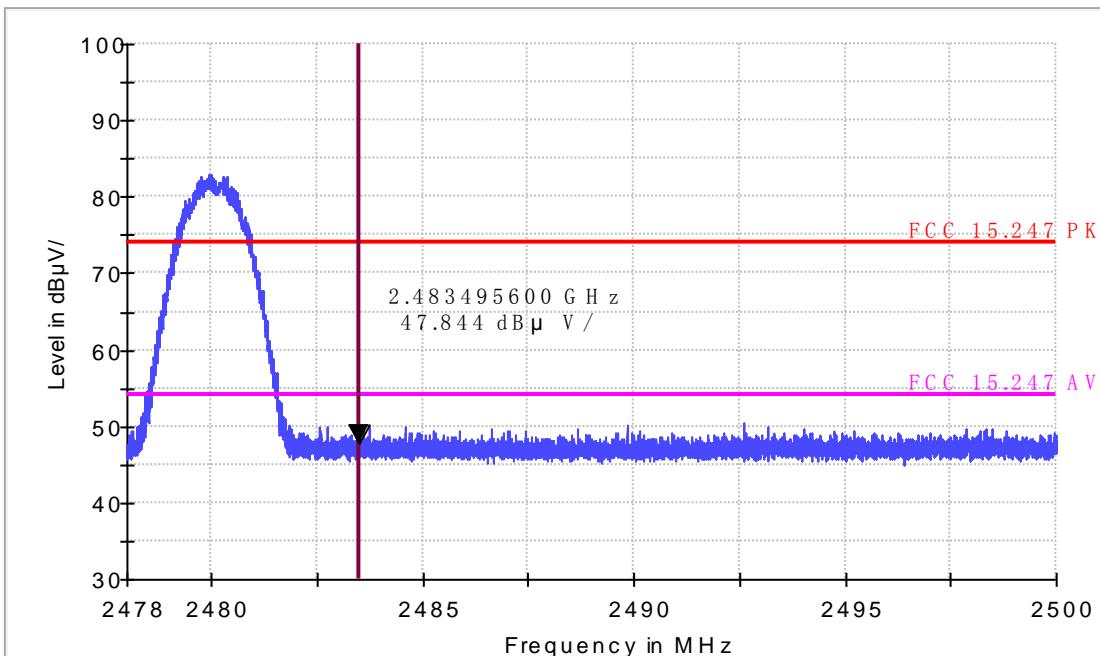

FCC Electric Field Strength 2.4GHz Bandedge-AV

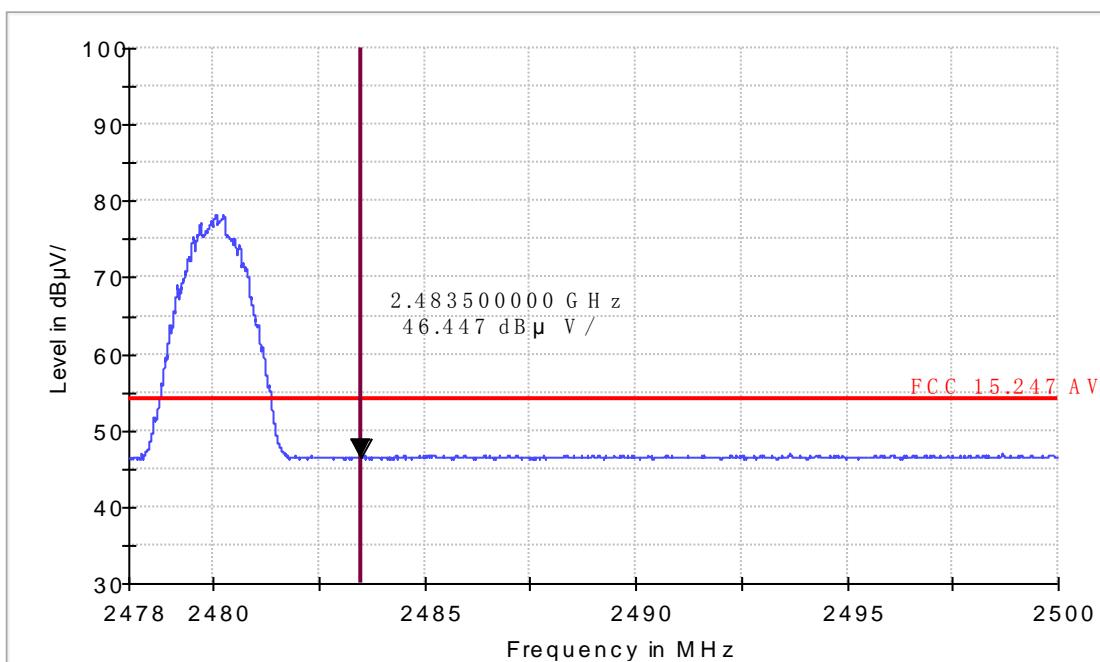


Bluetooth EDR


Low edge

Horizontal

FCC Electric Field Strength 2.4GHz Bandedge-PK

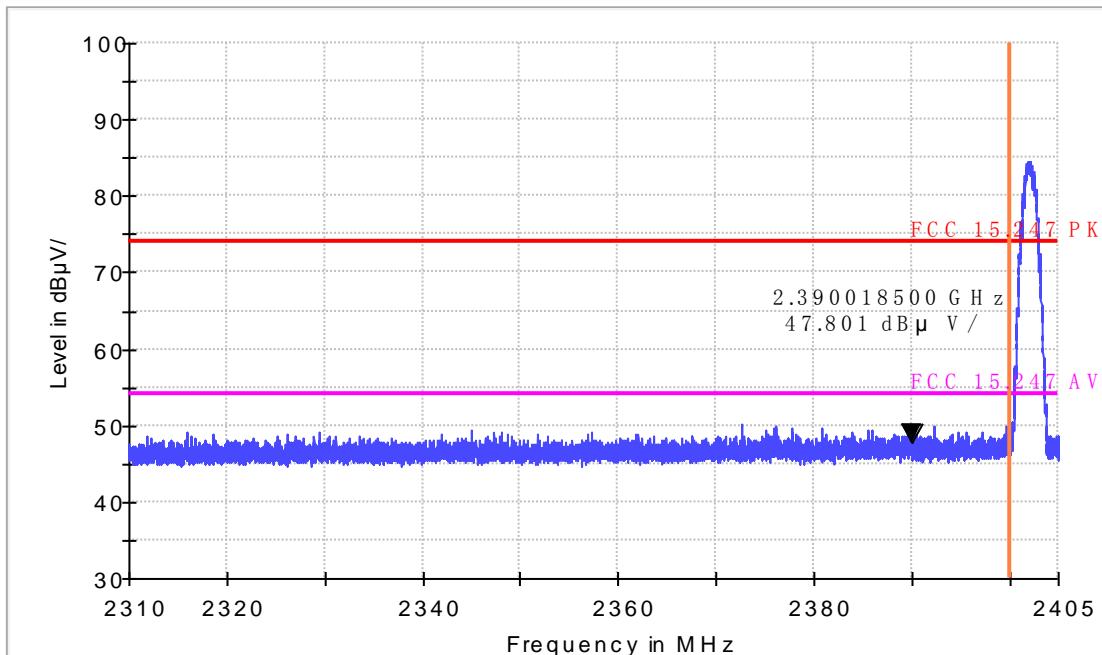


FCC Electric Field Strength 2.4GHz Bandedge-AV

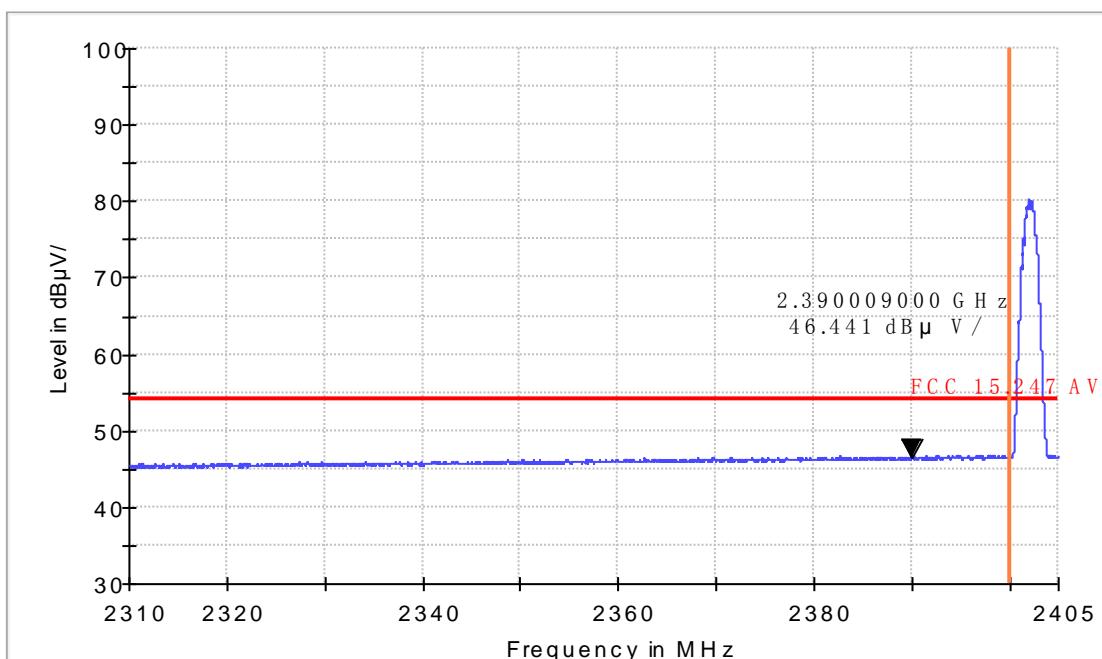


Vertical

FCC Electric Field Strength 2.4GHz Bandedge-PK

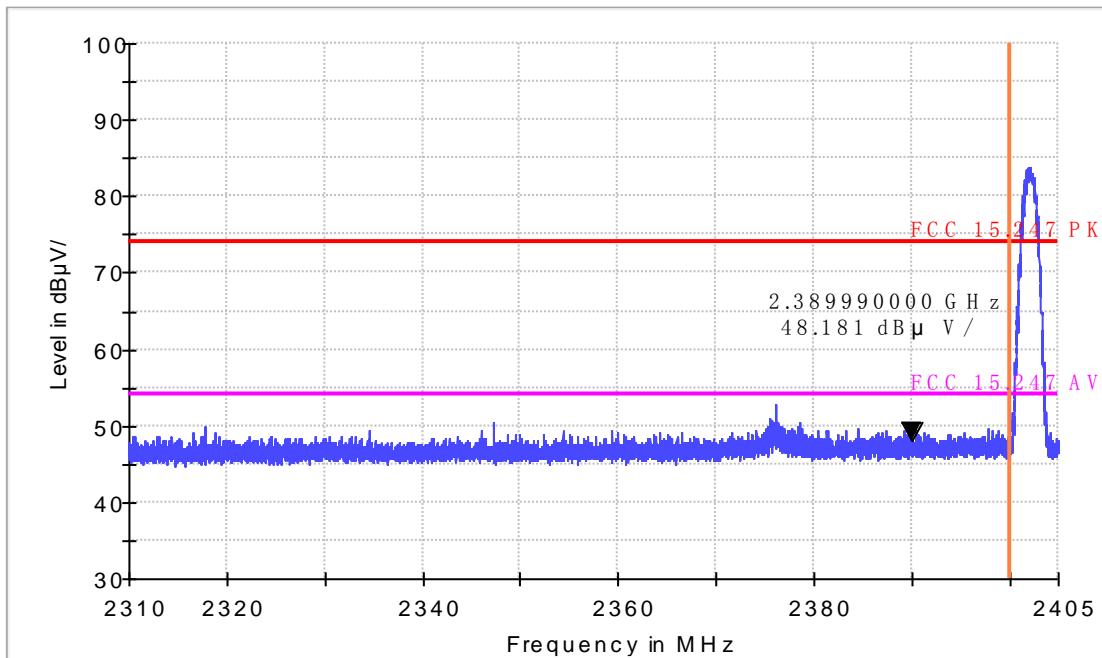

FCC Electric Field Strength 2.4GHz Bandedge-AV

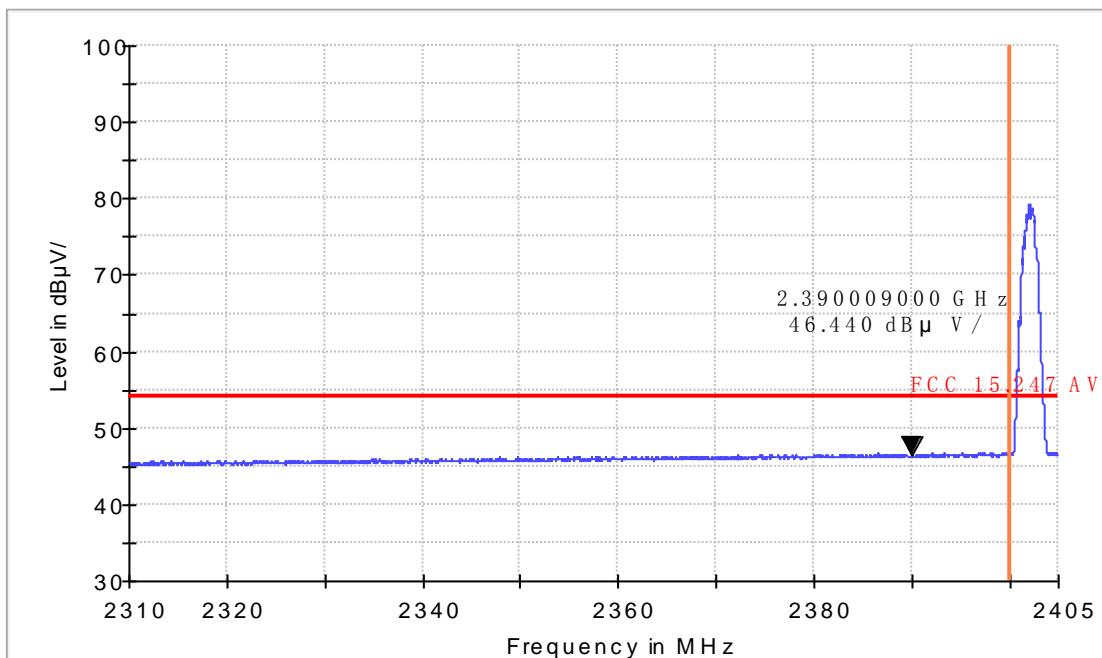


Bluetooth EDR


Upper edge

Horizontal

FCC Electric Field Strength 2.4GHz Bandedge-PK

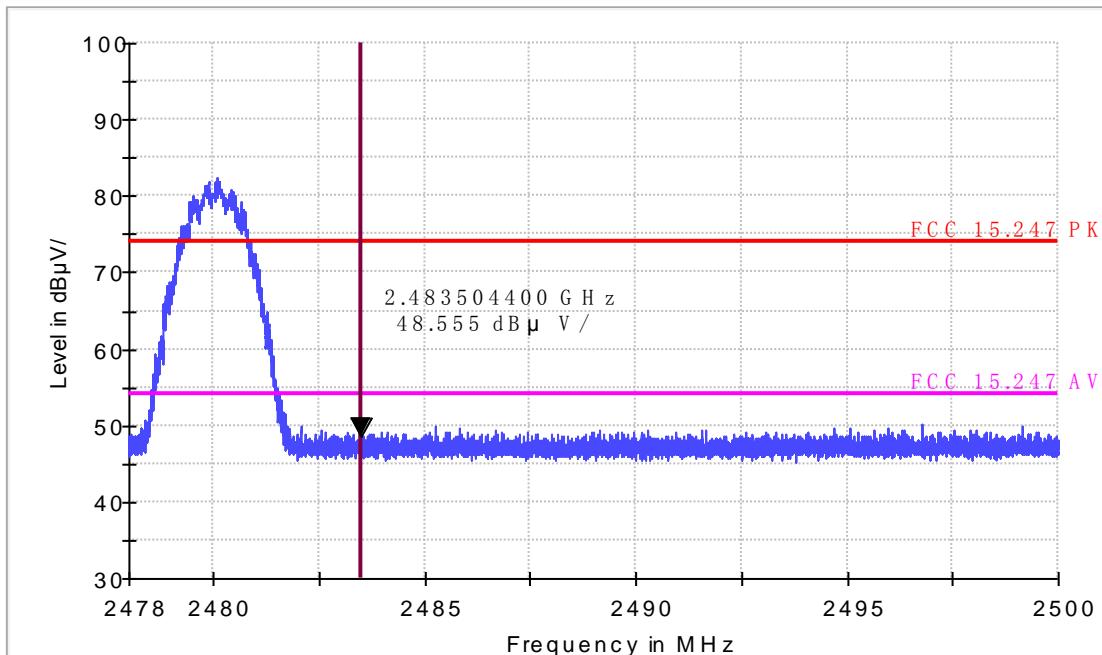


FCC Electric Field Strength 2.4GHz Bandedge-AV

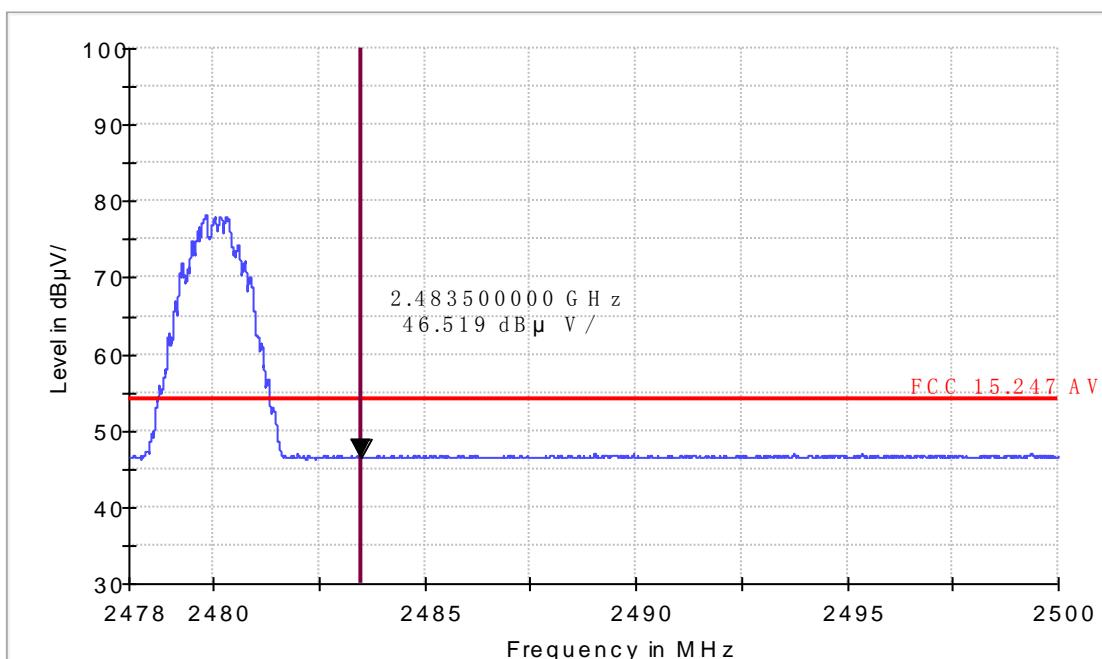


Vertical

FCC Electric Field Strength 2.4GHz Bandedge-PK

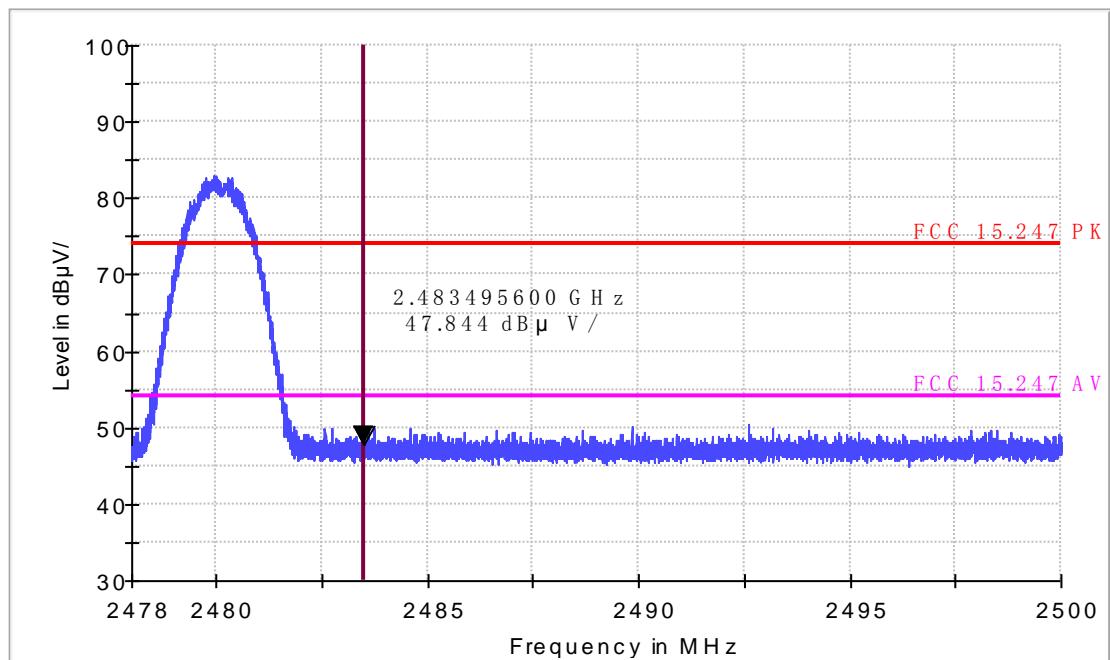

FCC Electric Field Strength 2.4GHz Bandedge-AV

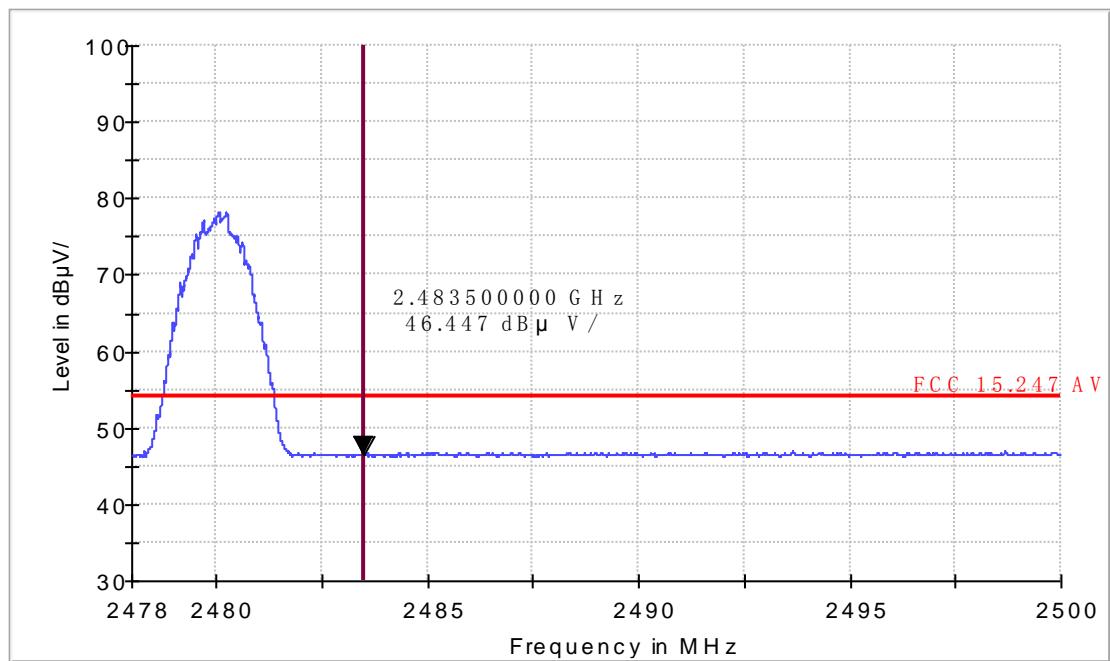

13. CONDUCTED SPURIOUS EMISSIONS

13.1. Limits of Band Edges Measurement

Below –20dB of the highest emission level of operating band (in 100kHz resolution bandwidth).

13.2. Test Procedure

The transmitter output was connected to the spectrum analyzer.

The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal

13.3. TEST RESULTS


Bluetooth Basic

Low channel

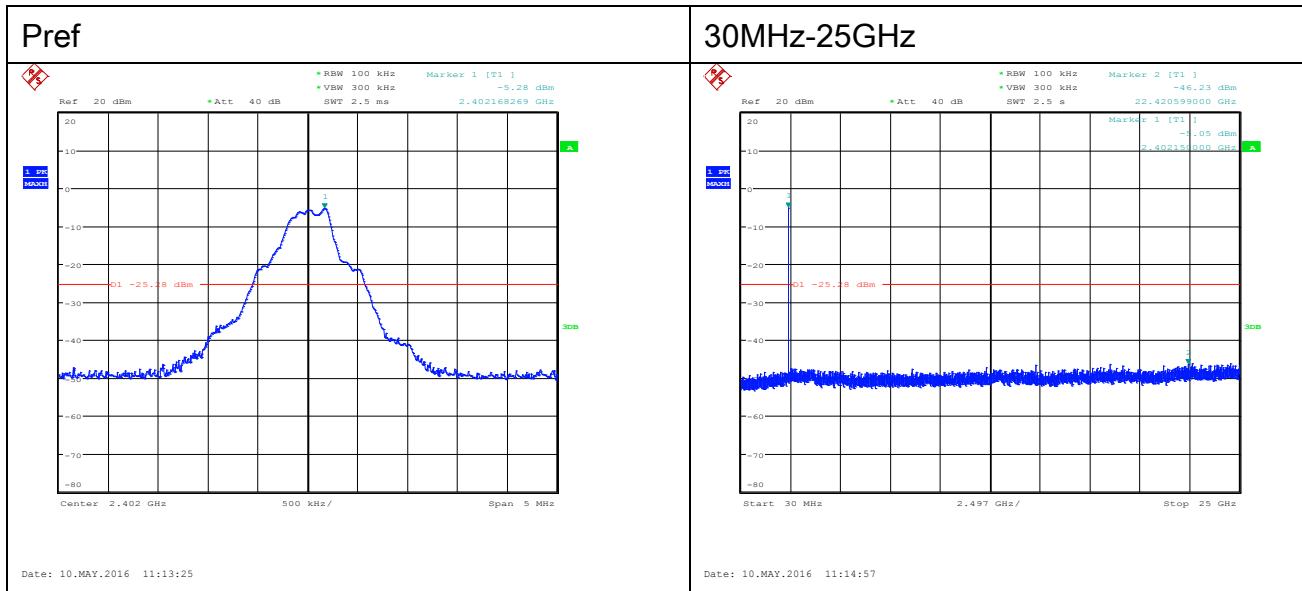


Bluetooth Basic

Mid channel

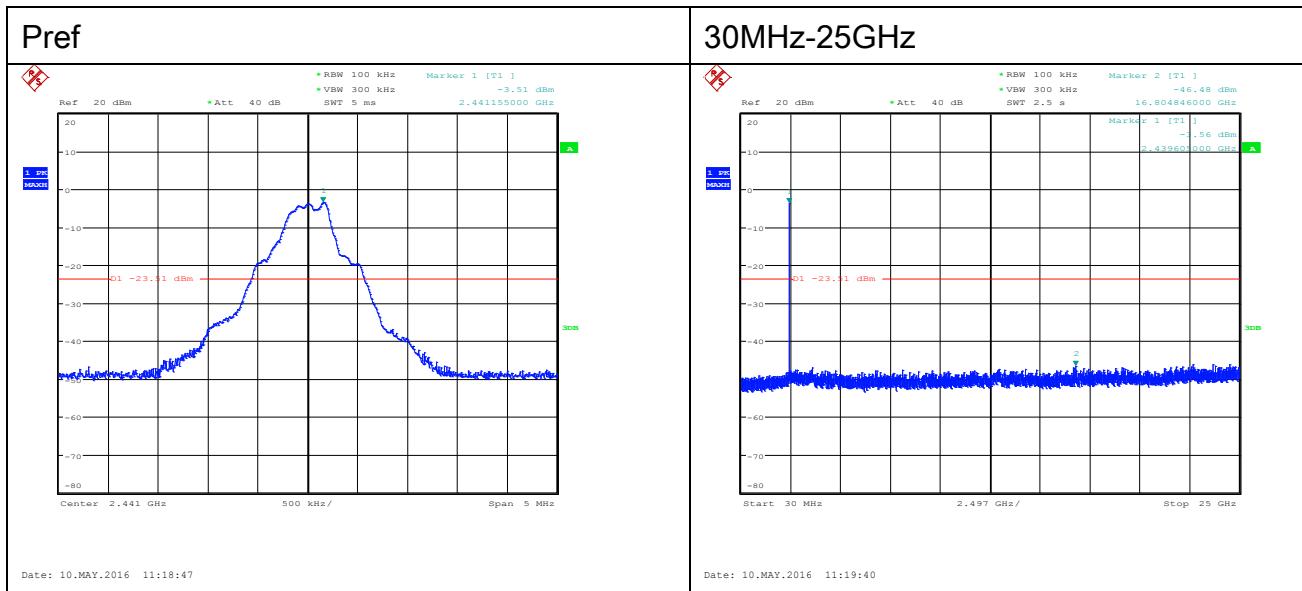


Bluetooth Basic

High Channel

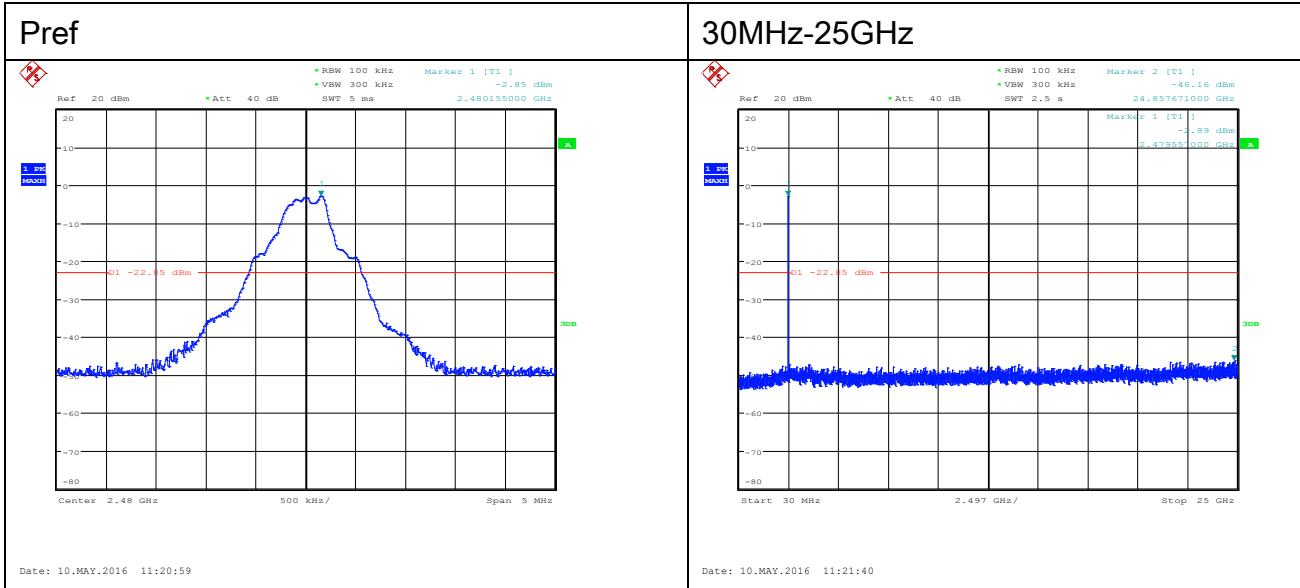


Bluetooth Basic

Bandedge hopping On

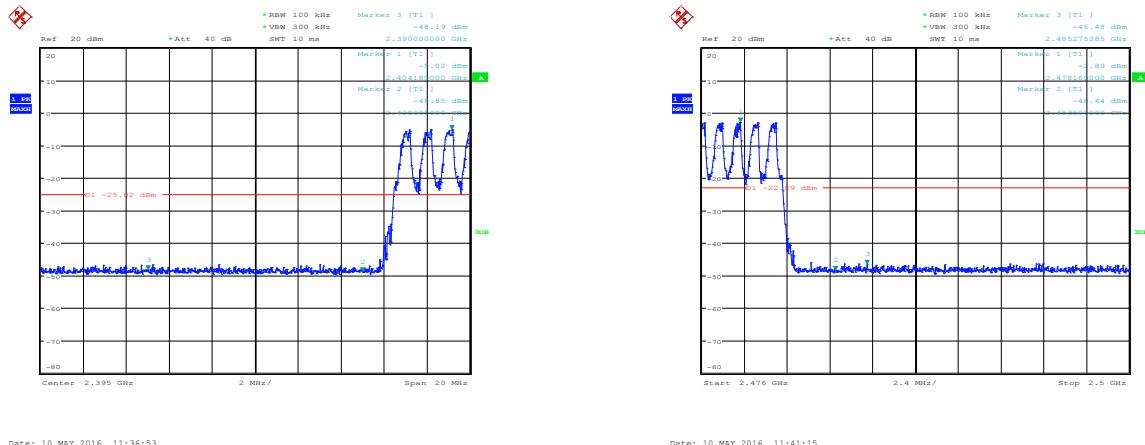


Bluetooth EDR

Low Channel

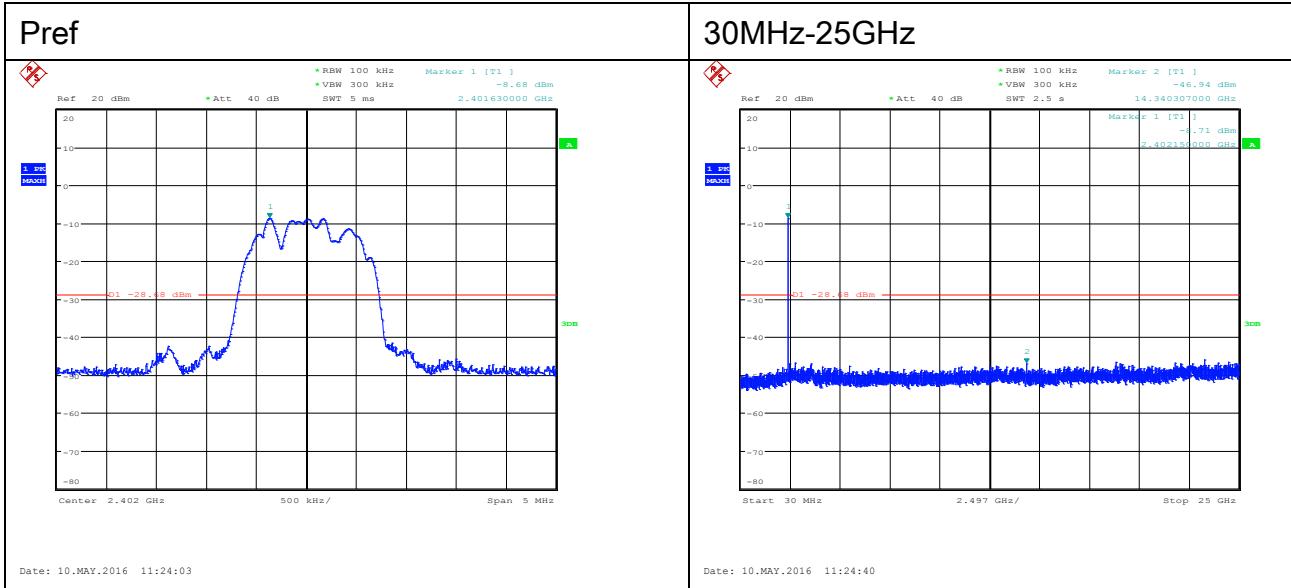


Bluetooth EDR

Mid Channel

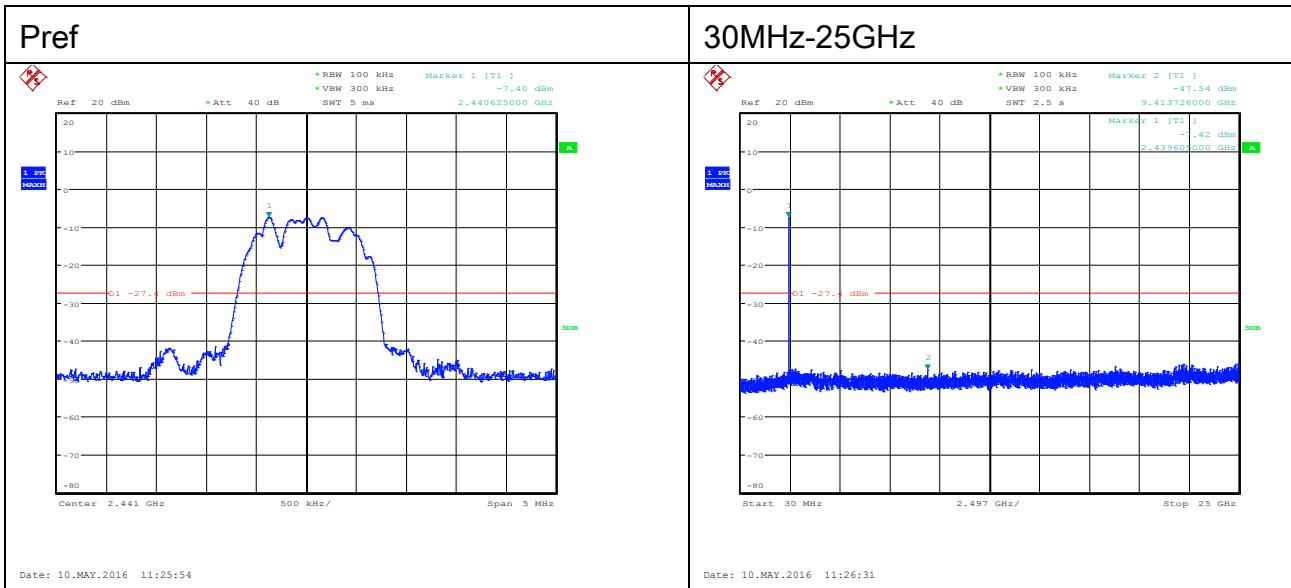


Bluetooth EDR

High Channel

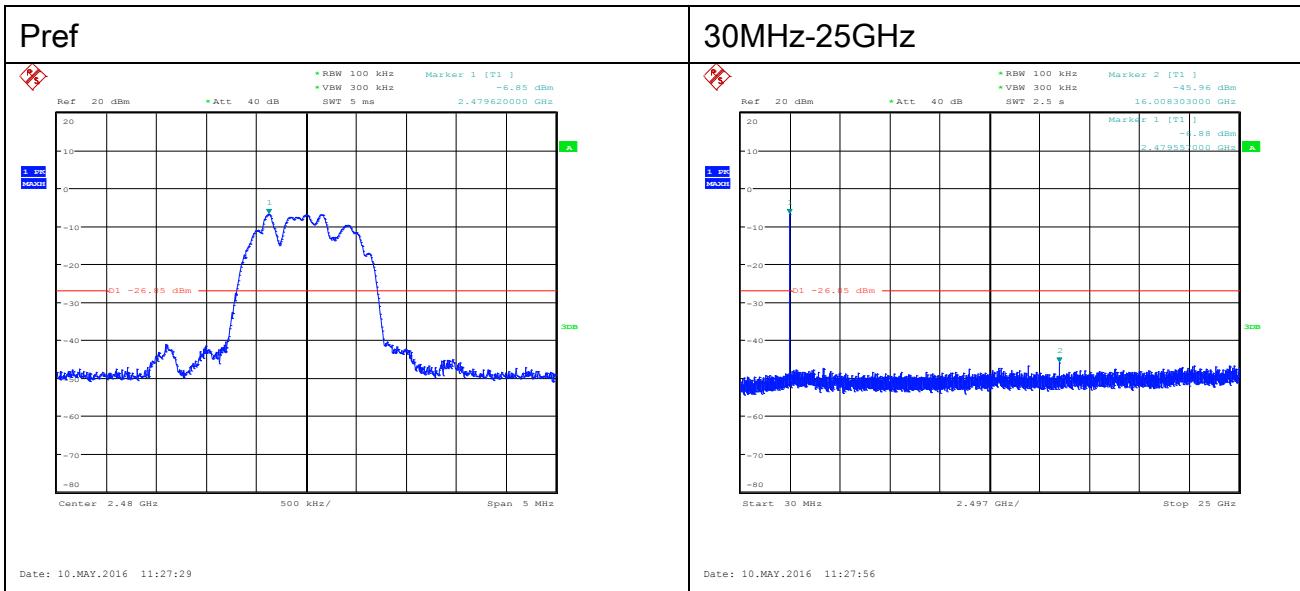

Bluetooth EDR

Bandedge

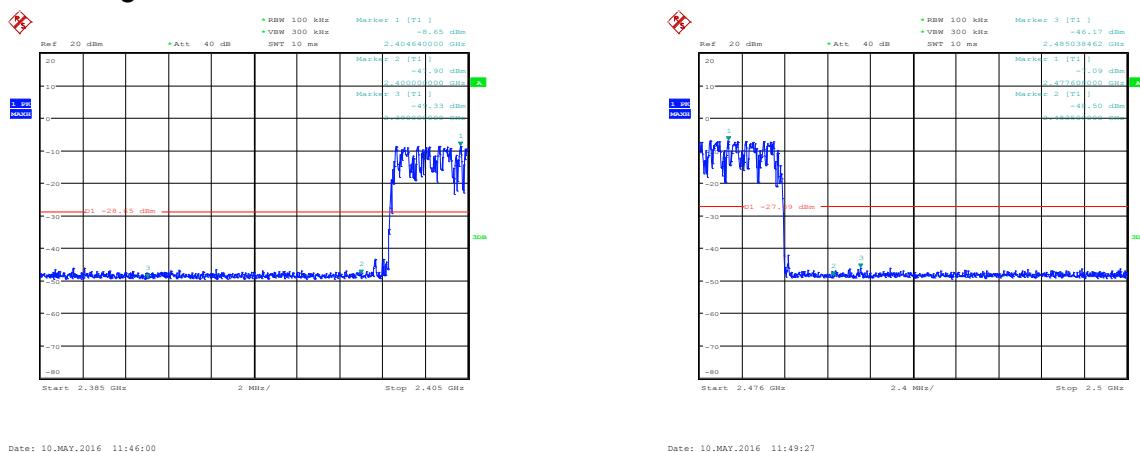

14. ANTENNA REQUIREMENTS

14.1. Applicable requirements

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

14.2. Antenna Connector

Antenna Connector is on the PCB within enclosure and not accessible to user.

14.3. Antenna Gain

The antenna gain of EUT is less than 6 dBi.

15.99% OCCUPIED BANDWIDTH

15.1. LIMITS OF 99% Occupied Bandwidth

None; for reporting purposes only

15.2. TEST PROCEDURE



The transmitter output was connected to the spectrum analyzer.

The transmitter output is connected to a spectrum analyzer. The RBW is set to \geq 1% of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled

15.3. TEST DATA


Table 13 99%Occupied Bandwidth Test Data BDR

Center Freq.[MHz]	99%Occupied Bandwidth [MHz]
2402	0.9335
2441	0.9375
2480	0.9335

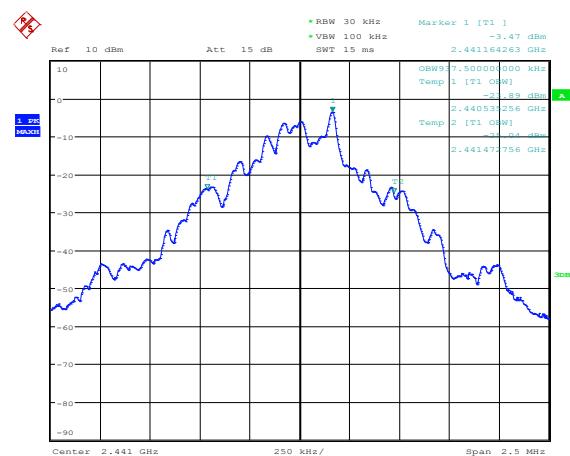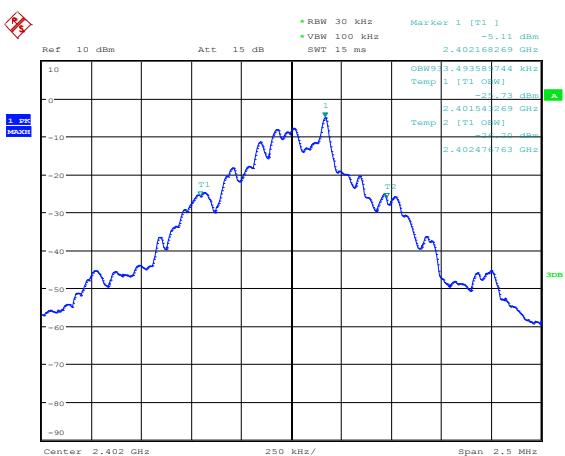

Date: 11.MAY.2016 16:06:51



Date: 11.MAY.2016 16:07:34

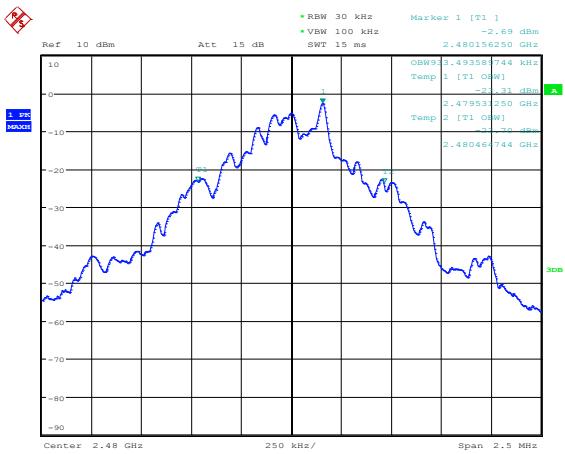

Date: 11.MAY.2016 16:08:02


Table 14 99%Occupied Bandwidth Test Data EDR

Center Freq.[MHz]	99%Occupied Bandwidth [MHz]
2402	1.2059
2441	1.2099
2480	1.2059

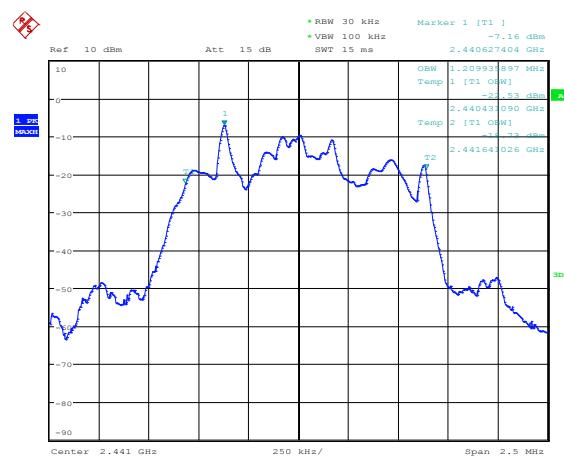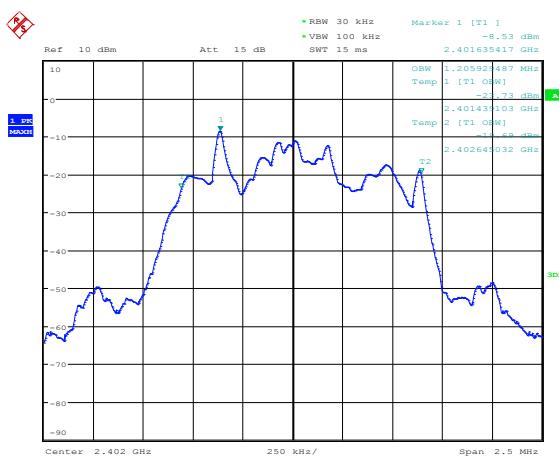

Date: 11.MAY.2016 16:08:53

Date: 11.MAY.2016 16:09:15

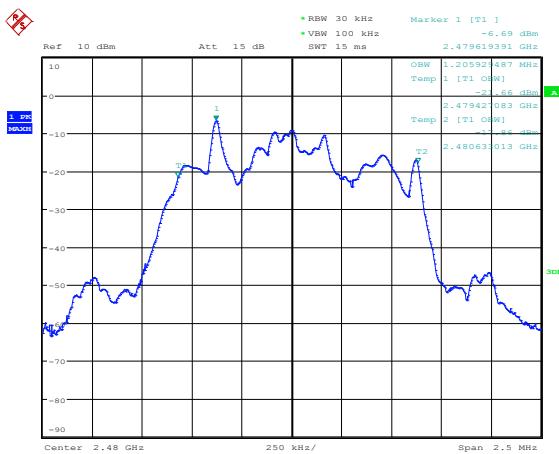

Date: 11.MAY.2016 16:10:20