



FCC RADIO TEST REPORT

FCC ID: QAPMW0733

Product : AOC Tablet

Trade Name : AOC

Model Name : MW0733

Serial Model : MW0733+, MW0733L

Report No. : NTEK-2013NT0708561F1

Prepared for

Fuzhou Smart Digital Science & Technology Co., Ltd
No.8 Building, Honshan Science & Technology Zone, Gulou District,
Fuzhou, Fujian, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen P.R. China
Tel.: +86-0755-61156588 Fax.: +86-0755-61156599
Website: www.ntek.org.cn

TEST RESULT CERTIFICATION

Applicant's name : Fuzhou Smart Digital Science & Technology Co., Ltd
Address : No.8 Building, Honshan Science & Technology Zone, Gulou District, Fuzhou, Fujian, China

Manufacture's Name : Fuzhou Smart Digital Science & Technology Co., Ltd
Address : No.8 Building, Honshan Science & Technology Zone, Gulou District, Fuzhou, Fujian, China

Product description

Product name : AOC Tablet
Model and/or type reference : MW0733
Serial Model : MW0733+, MW0733L

Standards : FCC Part15.247(2012)

Test procedure ANSI C63.4-2003

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests : 08 Jul. 2013 ~23 Jul. 2013

Date of Issue : 23 Jul. 2013

Test Result : **Pass**

Testing Engineer : Apple Huang
 (Apple Huang)

Technical Manager : Tom Zhang
 (Tom Zhang)

Authorized Signatory : Bovey Yang
 (Bovey Yang)

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	21
3.2.1 RADIATED EMISSION LIMITS	21
3.2.2 TEST PROCEDURE	21
3.2.3 DEVIATION FROM TEST STANDARD	22
3.2.4 TEST SETUP	23
3.2.5 EUT OPERATING CONDITIONS	24
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	25
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	26
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	29
4 . POWER SPECTRAL DENSITY TEST	42
4.1 APPLIED PROCEDURES / LIMIT	42
4.1.1 TEST PROCEDURE	42
4.1.2 DEVIATION FROM STANDARD	42
4.1.3 TEST SETUP	42
4.1.4 EUT OPERATION CONDITIONS	42
4.1.5 TEST RESULTS	43
5 . BANDWIDTH TEST	49
5.1 APPLIED PROCEDURES / LIMIT	49
5.1.1 TEST PROCEDURE	49

Table of Contents

	Page
5.1.2 DEVIATION FROM STANDARD	49
5.1.3 TEST SETUP	49
5.1.4 EUT OPERATION CONDITIONS	49
5.1.5 TEST RESULTS	50
6 . PEAK OUTPUT POWER TEST	56
6.1 APPLIED PROCEDURES / LIMIT	56
6.1.1 TEST PROCEDURE	56
6.1.2 DEVIATION FROM STANDARD	56
6.1.3 TEST SETUP	56
6.1.4 EUT OPERATION CONDITIONS	56
6.1.5 TEST RESULTS	57
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	58
7.1 DEVIATION FROM STANDARD	58
7.2 TEST SETUP	58
7.3 EUT OPERATION CONDITIONS	58
7.4 TEST RESULTS	59
8 . ANTENNA REQUIREMENT	63
8.1 STANDARD REQUIREMENT	63
8.2 EUT ANTENNA	63
9 . EUT TEST PHOTO	64
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add.:1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937; IC Registration No.:9270A-1

CNAS Registration No.:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	AOC Tablet	
Trade Name	KOCASO,KOVIAS	
Model Name	MW0733	
Serial Model	MW0733+, MW0733L	
Model Difference	All the models are the same circuit and RF module, except the model names.	
Product Description	The EUT is a AOC Tablet	
	Operation Frequency:	802.11b/g/n:2412~2462 MHz
	Modulation Type:	CCK/OFDM/DBPSK/DAPSK
	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n:65/52/6.5Mbps
	Number Of Channel	802.11b/g/n:11CH
	Antenna Designation:	Please see Note 3.
	Output Power(Conducted):	802.11b: 12.61 dBm (Max.) 802.11g: 11.79 dBm (Max.) 802.11n: 10.78 dBm (Max.)
	Antenna Gain (dBi)	1.0dbi
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Ratings	DC 3.7V	
Adapter 1	Model: DSA-12PFA-05 FUS 050150 AC Power Input: 100-240V~, 50/60Hz, 0.5A Output: 5V $\overline{\text{---}}$, 1.5A	
Adapter 2	Model: SW013UF-0500150US AC Power Input: 100-240V~, 50/60Hz, 0.4A Output: 5V $\overline{\text{---}}$, 1.5A	
Adapter 2	Model: IVP0500-1500 AC Power Input: 100-240V~, 50/60Hz, 0.5A Output: 5V $\overline{\text{---}}$, 1.5A	
Battery	DC 3.7V	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List for 802.11b/g/n(20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3.

Table for Filed Antenna

Ant .	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
A	N/A	N/A	FPCB Antenna	N/A	1.0	Wifi Antenna

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n CH1/ CH6/ CH11
Mode 4	Link Mode

For Conducted Emission	
Final Test Mode	Description
Mode 4	Link Mode


For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n CH1/ CH6/ CH11

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test

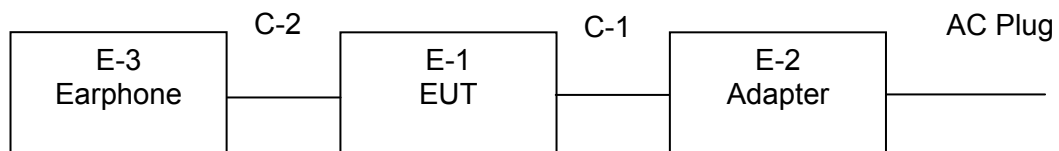

Radiated Spurious Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	AOC Tablet	AOC	MW0733	N/A	EUT
E-2	Adapter	N/A	DSA-12PFA-05 FUS 050150	N/A	
E-3	Earphone	N/A	2688	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	YES	1.0m	
C-2	NO	NO	0.8m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2013.07.06	2014.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2013.06.07	2014.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2013.07.06	2014.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2013.06.07	2014.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2013.06.07	2014.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2013.07.06	2014.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2013.07.06	2014.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2013.12.22	2014.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2013.06.08	2014.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2013.07.06	2014.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2013.07.06	2014.07.05	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2013.06.06	2014.06.05	1 year
2	LISN	R&S	ENV216	101313	2012.08.24	2013.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2012.08.24	2013.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2013.06.07	2014.06.06	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2013.06.07	2014.06.06	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2013.06.08	2014.06.07	1 year

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

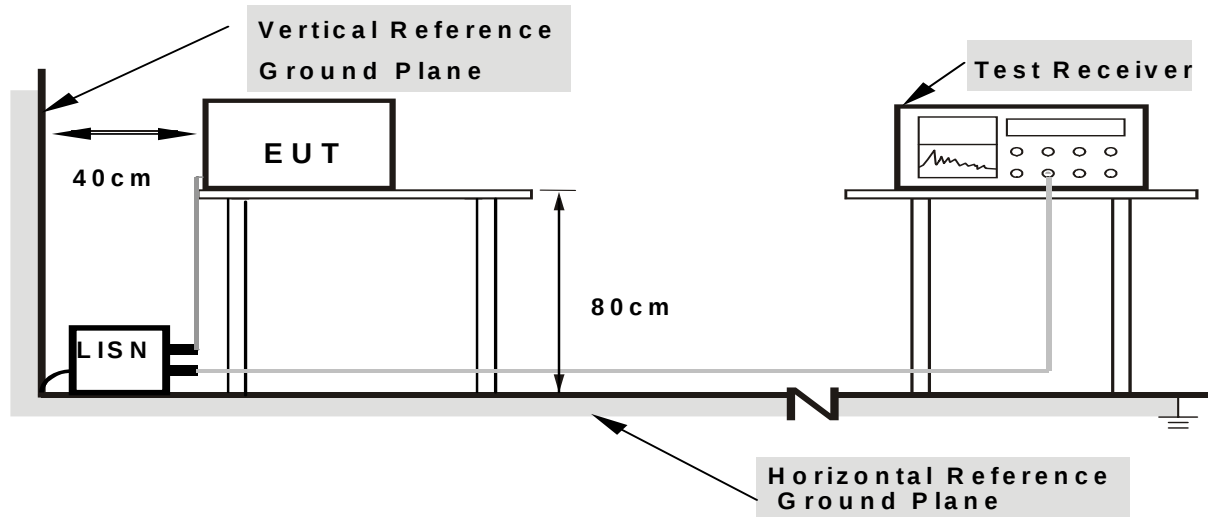

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6 TEST RESULTS

EUT :	AOC Tablet	Model Name. :	MW0733
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	Adapter1 (AC 120V/60Hz)	Test Mode :	Mode 1

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1500	40.16	9.82	49.98	65.99	-16.01	QP
0.1500	23.69	9.82	33.51	55.99	-22.48	AVG
0.4060	35.29	10.20	45.49	57.73	-12.24	QP
0.4060	24.22	10.20	34.42	47.73	-13.31	AVG
0.9180	28.91	10.18	39.09	56.00	-16.91	QP
0.9180	17.57	10.18	27.75	46.00	-18.25	AVG
1.2980	29.20	10.18	39.38	56.00	-16.62	QP
1.2980	17.98	10.18	28.16	46.00	-17.84	AVG
2.3740	28.63	10.26	38.89	56.00	-17.11	QP
2.3740	16.91	10.26	27.17	46.00	-18.83	AVG
27.8939	33.22	10.59	43.81	60.00	-16.19	QP
27.8939	9.53	10.59	20.12	50.00	-29.88	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

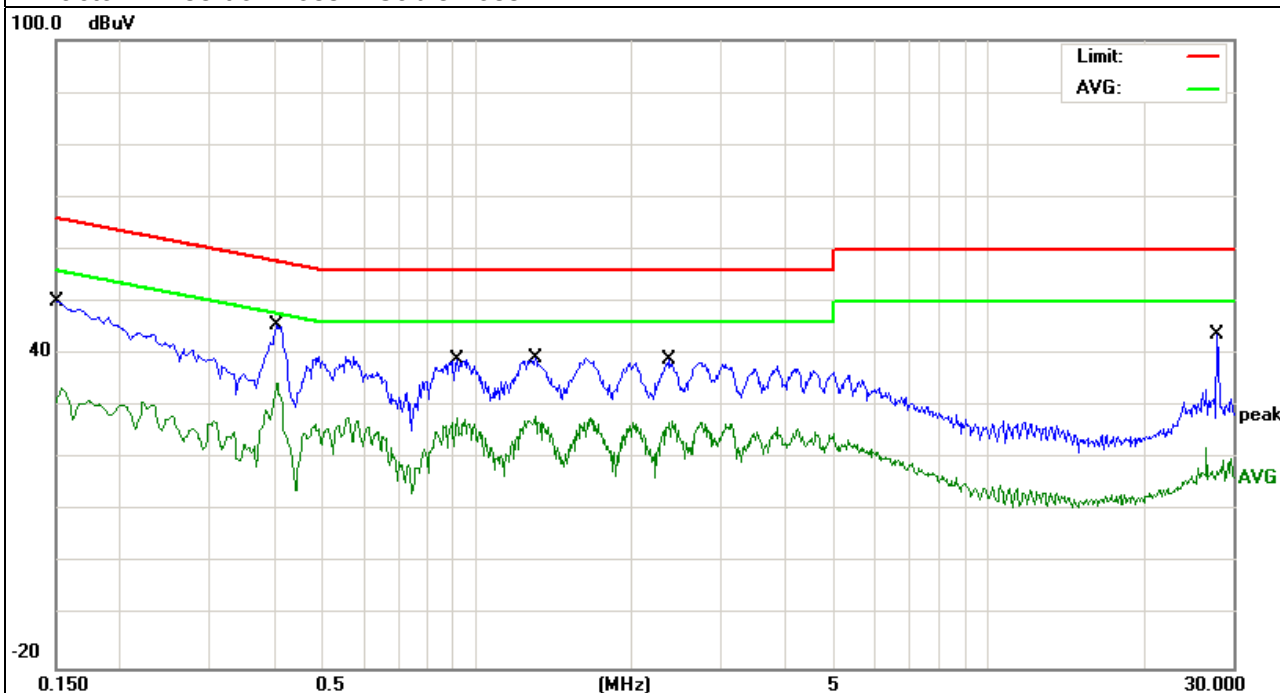


EUT :	AOC Tablet	Model Name. :	MW0733
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	Adapter1 (AC 120V/60Hz)	Test Mode :	Mode 1

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1580	41.32	9.88	51.20	65.56	-14.36	QP
0.1580	19.39	9.88	29.27	55.56	-26.29	AVG
0.4060	28.06	10.20	38.26	57.73	-19.47	QP
0.4060	16.99	10.20	27.19	47.73	-20.54	AVG
1.1820	23.35	10.17	33.52	56.00	-22.48	QP
1.1820	9.26	10.17	19.43	46.00	-26.57	AVG
1.9180	23.54	10.24	33.78	56.00	-22.22	QP
1.9180	9.10	10.24	19.34	46.00	-26.66	AVG
2.6940	23.98	10.27	34.25	56.00	-21.75	QP
2.6940	10.55	10.27	20.82	46.00	-25.18	AVG
5.2979	23.29	10.34	33.63	60.00	-26.37	QP
5.2979	7.10	10.34	17.44	50.00	-32.56	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

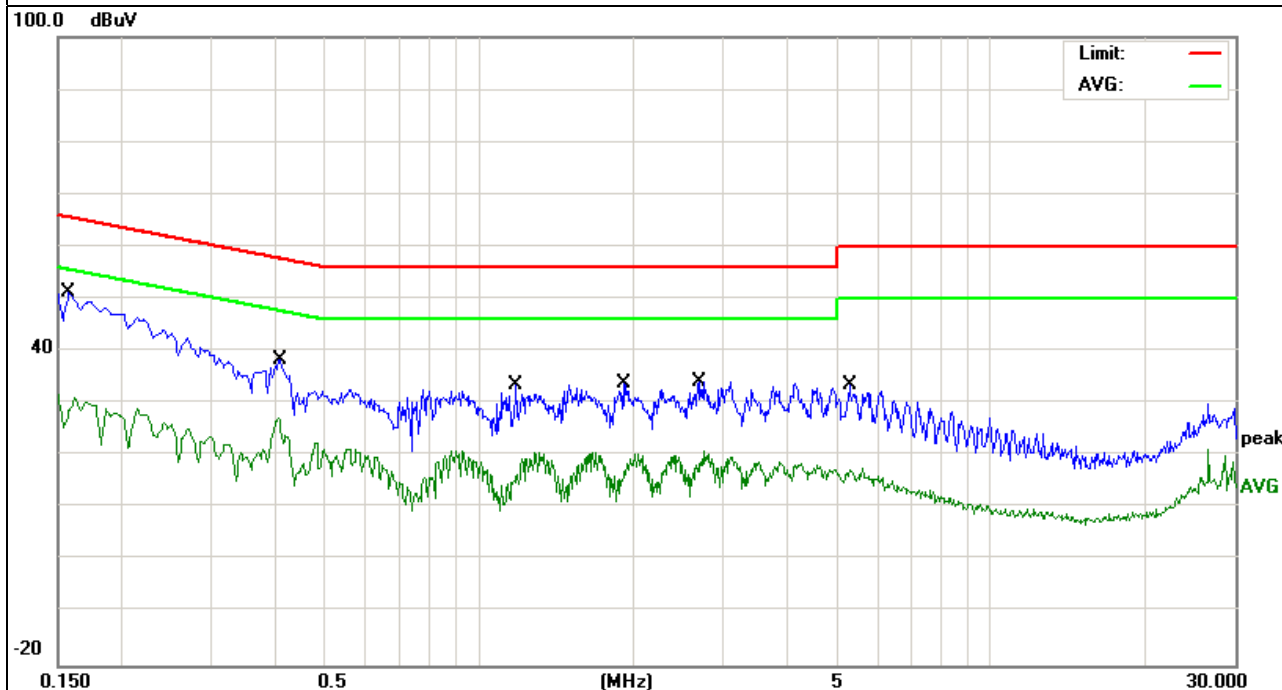


EUT :	AOC Tablet	Model Name. :	MW0733
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	Adapter2(AC 120V/60Hz)	Test Mode :	Mode 1

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.194	42.68	0.37	43.05	63.86	-20.81	peak
2.6218	19.79	0.38	20.17	56	-35.83	peak

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

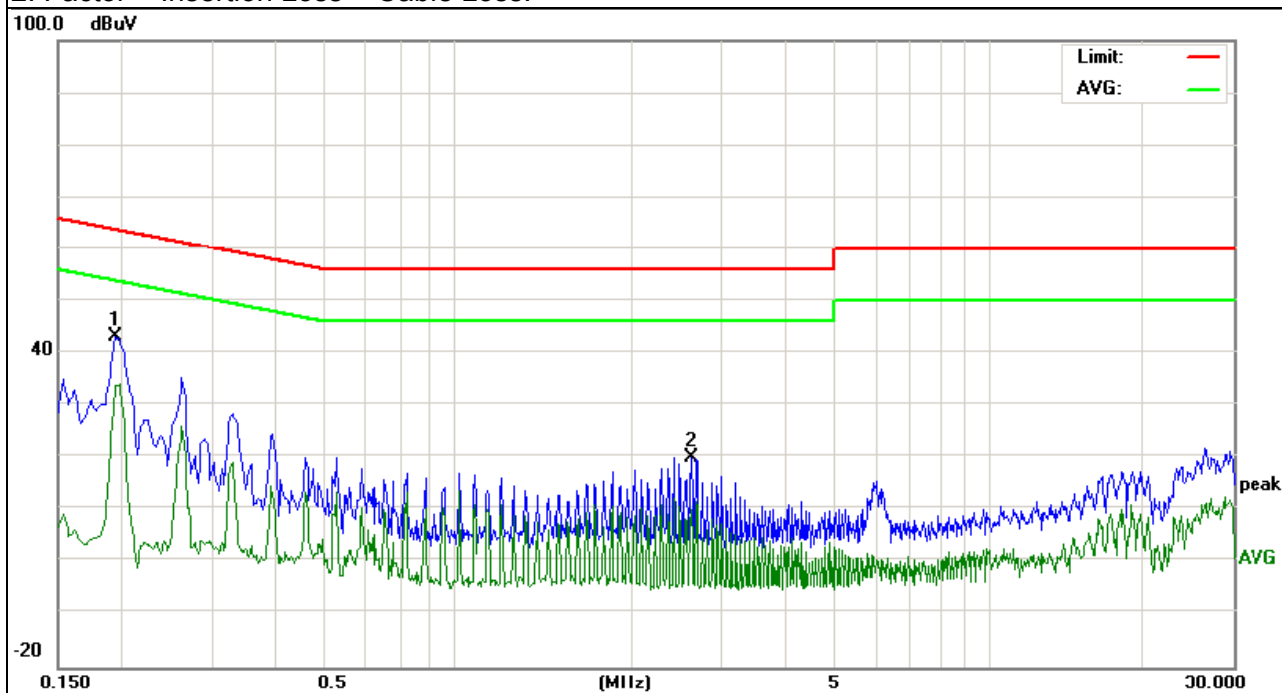


EUT :	AOC Tablet	Model Name. :	MW0733
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	Adapter2 (AC 120V/60Hz)	Test Mode :	Mode 1

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.198	42.59	0.31	42.9	63.69	-20.79	peak
2.6259	21.48	0.38	21.86	56	-34.14	peak

Remark:

1. All readings are Quasi-Peak and Average values.

2. Factor = Insertion Loss + Cable Loss.

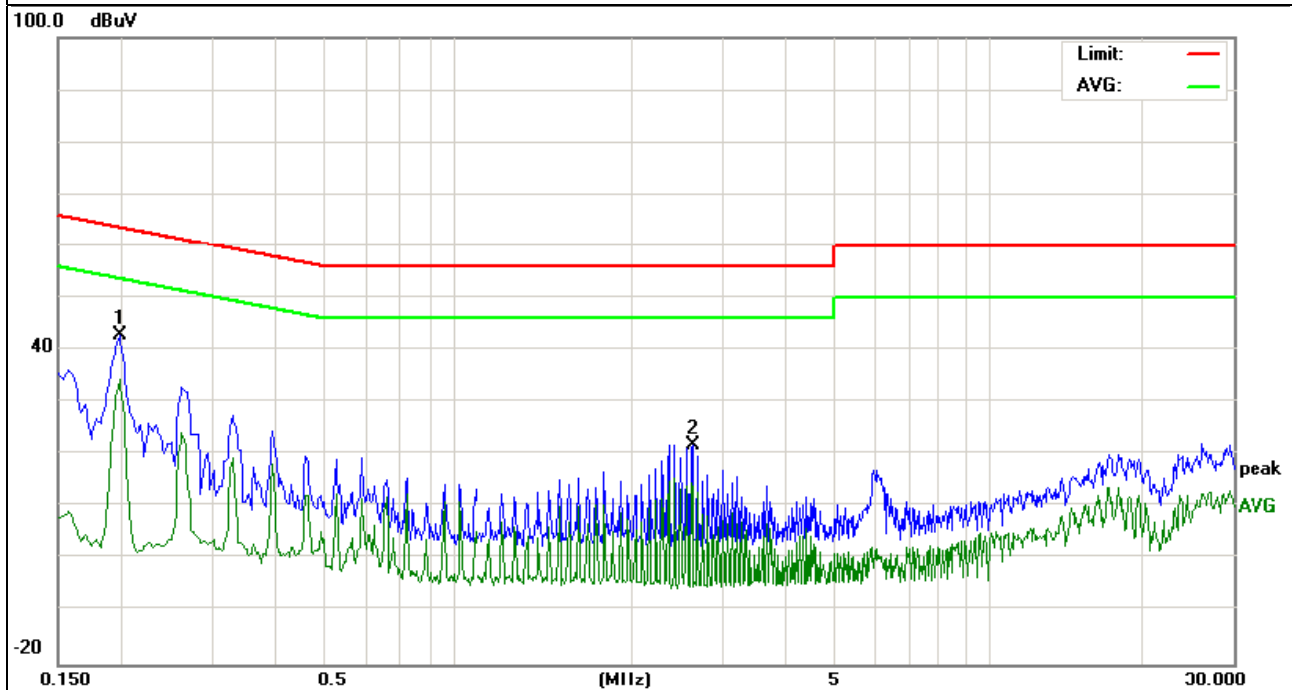


EUT :	AOC Tablet	Model Name. :	MW0733
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	Adapter3 (AC 120V/60Hz)	Test Mode :	Mode 1

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.8619	26.64	0.36	27	56	-29	peak
2.0619	19.69	0.36	20.05	56	-35.95	peak

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

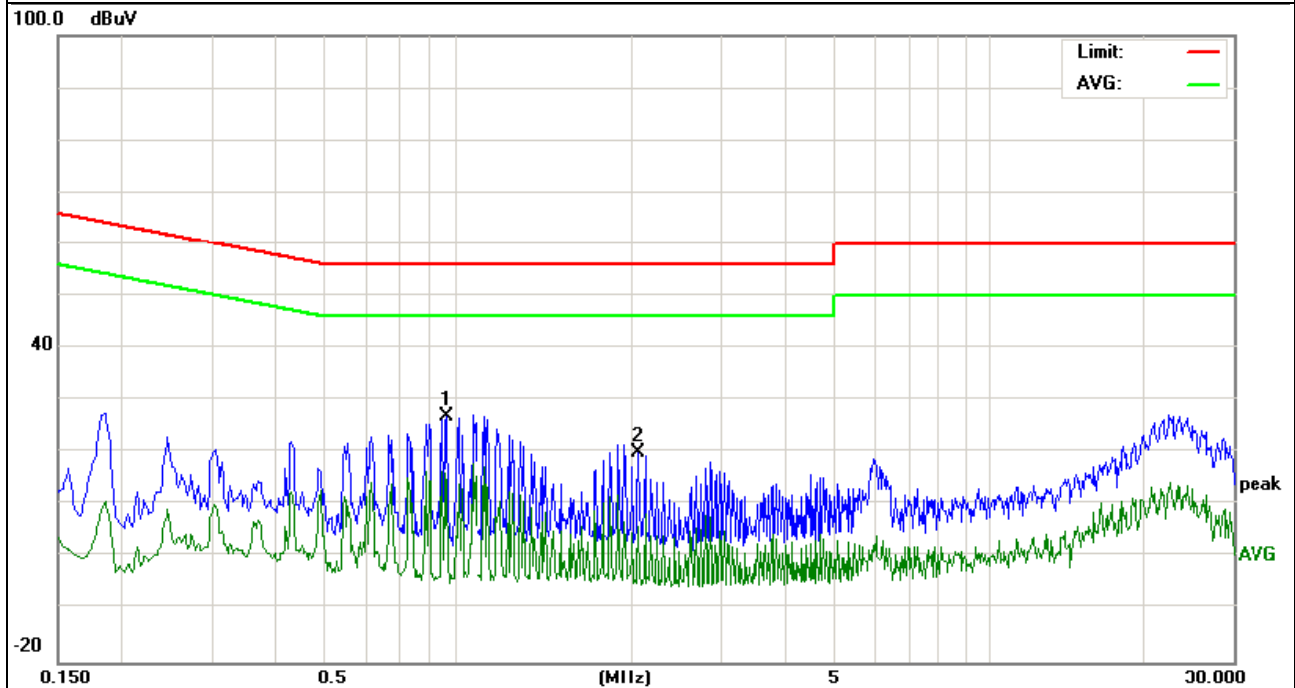


EUT :	AOC Tablet	Model Name. :	MW0733
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	Adapter3 (AC 120V/60Hz)	Test Mode :	Mode 1

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.8659	27.37	0.36	27.73	56	-28.27	peak
2.9739	17.68	0.4	18.08	56	-37.92	peak

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

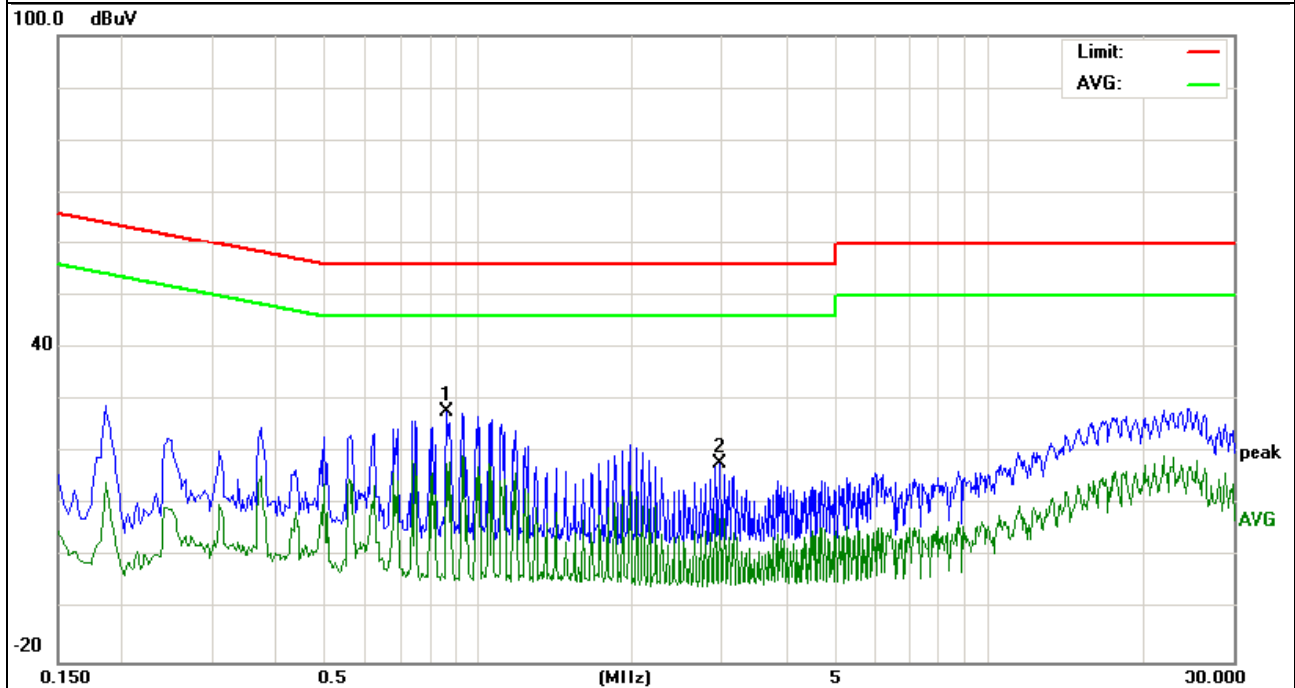

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.

f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

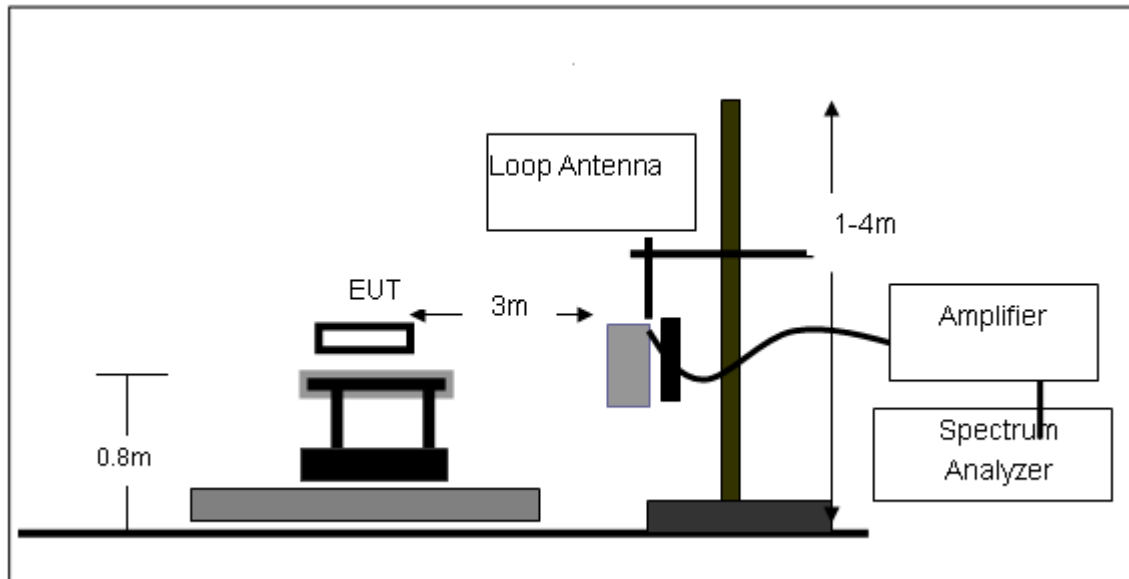

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

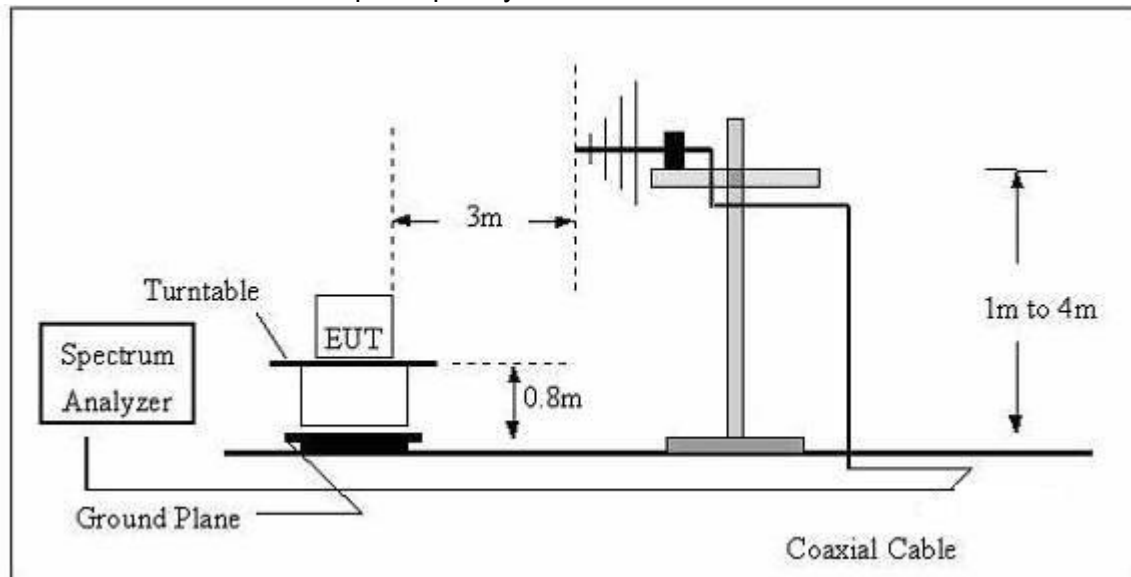

(C) Radiated Emission Test-Up Frequency Above 1GHz

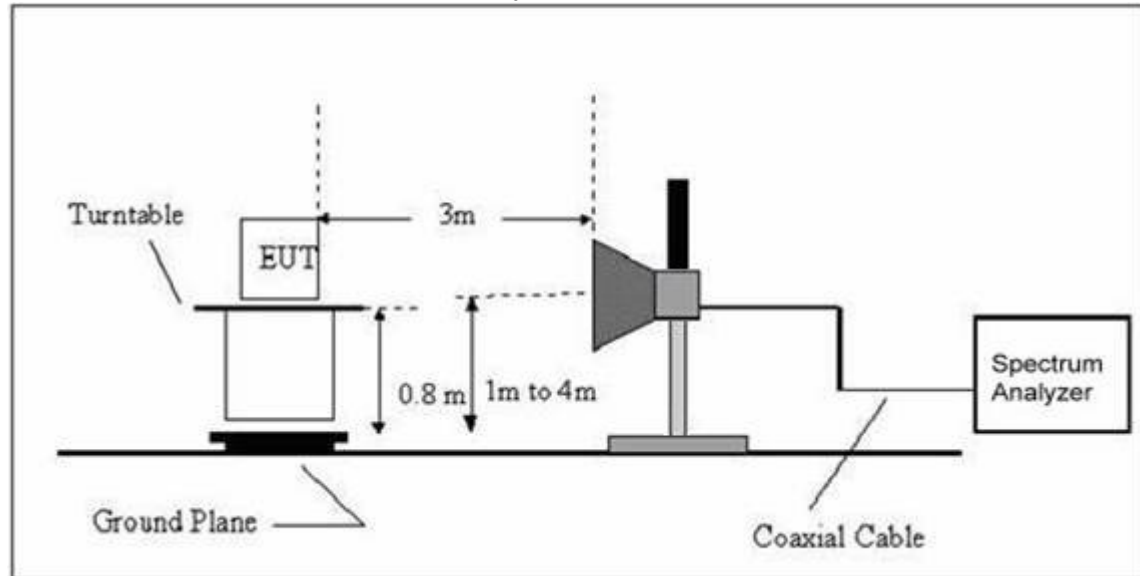**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

EUT:	AOC Tablet	Model Name. :	MW0733
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

EUT :	AOC Tablet	Model Name :	MW0733
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 4(adapter 1)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	73.3593	29.73	6.56	36.29	40.00	-3.71	QP
V	112.5241	28.24	11.79	40.03	43.50	-3.47	QP
V	167.8240	29.03	10.59	39.62	43.50	-3.88	QP
V	252.9482	27.98	13.94	41.92	46.00	-4.08	QP
V	336.0350	18.96	16.03	34.99	46.00	-11.01	QP
V	533.8318	17.52	21.58	39.10	46.00	-6.90	QP
H	76.7806	28.56	7.14	35.70	40.00	-4.30	QP
H	155.9097	27.35	11.38	38.73	43.50	-4.77	QP
H	215.2675	27.39	9.91	37.30	43.50	-6.20	QP
H	330.1949	21.14	15.85	36.99	46.00	-9.01	QP
H	416.1791	15.58	18.92	34.50	46.00	-11.50	QP
H	595.1326	14.92	22.60	37.52	46.00	-8.48	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Limit- Absolute Level

EUT :	AOC Tablet	Model Name :	MW0733
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 4(adapter 2)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	119.4360	17.21	12.08	29.29	43.50	-14.21	QP
V	128.1129	17.17	12.20	29.37	43.50	-14.13	QP
V	170.7926	21.57	10.35	31.92	43.50	-11.58	QP
V	341.9786	13.35	16.19	29.54	46.00	-16.46	QP
V	468.8761	18.47	19.69	38.16	46.00	-7.84	QP
V	935.5462	10.35	29.42	39.77	46.00	-6.23	QP
H	170.7923	28.59	10.35	38.94	43.50	-4.56	QP
H	341.9786	26.15	16.19	42.34	46.00	-3.66	QP
H	468.8761	22.10	19.69	41.79	46.00	-4.21	QP
H	726.8052	15.78	26.00	41.78	46.00	-4.22	QP
H	813.1114	17.32	26.35	43.67	46.00	-2.33	QP
H	854.0247	13.49	27.51	41.00	46.00	-5.00	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level- Limit

EUT :	AOC Tablet	Model Name :	MW0733
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 4(adapter 3)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	119.4360	17.21	12.08	29.29	43.50	-14.21	QP
V	128.1129	17.17	12.20	29.37	43.50	-14.13	QP
V	170.7926	21.57	10.35	31.92	43.50	-11.58	QP
V	341.9786	13.35	16.19	29.54	46.00	-16.46	QP
V	468.8761	18.47	19.69	38.16	46.00	-7.84	QP
V	935.5462	10.35	29.42	39.77	46.00	-6.23	QP
H	170.7923	28.59	10.35	38.94	43.50	-4.56	QP
H	341.9786	26.15	16.19	42.34	46.00	-3.66	QP
H	468.8761	22.10	19.69	41.79	46.00	-4.21	QP
H	726.8052	15.78	26.00	41.78	46.00	-4.22	QP
H	813.1114	17.32	26.35	43.67	46.00	-2.33	QP
H	854.0247	13.49	27.51	41.00	46.00	-5.00	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level- Limit

3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

Radiated Spurious Emission

1GHz~25GHz:(Scan with 802.11b, 802.11g,802.11n),The worst mode is 802.11b

802.11b/2412MHz

Normal Voltage

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412							
V	4824.642	67.44	-3.60	63.84	74.00	-10.16	Pk
V	4824.642	46.28	-3.60	42.68	54.00	-11.32	AV
H	4825.246	66.95	-3.58	63.37	74.00	-10.63	Pk
H	4825.246	43.26	-3.58	39.68	54.00	-14.32	AV

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Limit- Absolute Level

802.11b/2437MHz

Normal Voltage

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2437							
V	4874.549	65.19	-3.64	61.55	74.00	-12.45	Pk
V	4874.549	42.57	-3.64	38.93	54.00	-15.07	AV
H	4875.184	64.28	-3.64	60.64	74.00	-13.36	Pk
H	4875.184	41.17	-3.64	37.53	54.00	-16.47	AV

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Limit- Absolute Level

802.11b/2462MHz

Normal Voltage

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2462							
V	4925.016	56.39	-3.64	52.75	74.00	-21.25	pk
H	4923.864	55.48	-3.66	51.82	74.00	-22.18	pk

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Limit- Absolute Level

802.11g/2412MHz

Normal Voltage

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412							
V	4823.618	62.57	-3.6	58.97	74.00	-15.03	Pk
V	4823.618	40.61	-3.6	37.01	54.00	-16.99	AV
H	4824.197	63.22	-3.6	59.62	74.00	-14.38	Pk
H	4824.197	42.08	-3.6	38.48	54.00	-15.52	AV

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Limit- Absolute Level

802.11g/2437MHz

Normal Voltage

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2437							
V	4873.291	63.17	-3.63	59.54	74.00	-14.46	Pk
V	4873.291	41.24	-3.63	37.61	54.00	-16.39	AV
H	4874.609	60.48	-3.64	56.84	74.00	-17.16	Pk
H	4874.609	40.83	-3.64	37.19	54.00	-16.81	AV

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Limit- Absolute Level

802.11g/2462MHz

Normal Voltage

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2462							
V	4924.527	55.21	-3.60	51.61	74.00	-22.39	pk
H	4923.256	56.09	-3.66	52.43	74.00	-21.57	pk

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Limit- Absolute Level

802.11n(20MHz)/2412MHz

Normal Voltage

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412							
V	4825.307	62.18	-3.58	58.6	74.00	-15.40	Pk
V	4825.307	41.97	-3.58	38.39	54.00	-15.61	AV
H	4824.592	61.27	-3.60	57.67	74.00	-16.33	Pk
H	4824.592	39.58	-3.60	35.98	54.00	-18.02	AV

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Limit- Absolute Level

802.11n(20MHz)/2437MHz

Normal Voltage

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2437							
V	4875.627	63.17	-3.63	59.54	74.00	-14.46	Pk
V	4875.627	41.24	-3.63	37.61	54.00	-16.39	AV
H	4873.834	60.48	-3.64	56.84	74.00	-17.16	Pk
H	4873.834	40.83	-3.64	37.19	54.00	-16.81	AV

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Limit- Absolute Level

802.11n(20MHz)/2462MHz

Normal Voltage

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2462							
V	4922.907	59.67	-3.64	56.03	74.00	-17.97	pk
V	4922.907	37.19	-3.64	33.55	54.00	-20.45	AV
H	4925.648	55.94	-3.66	52.28	74.00	-21.72	pk

Remark:



Absolute Level= ReadingLevel+ Factor, Margin= Limit- Absolute Level

Radiated band edge:



Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
802.11b							
2390	61.97	-12.99	48.98	74	-25.02	peak	Vertical
2390	58.88	-12.99	45.89	74	-28.11	peak	Horizontal
2483.5	50.78	-12.78	38.00	74	-36.00	peak	Vertical
2483.5	50.63	-12.78	37.85	74	-35.69	peak	Horizontal
802.11g							
2390	56.44	-12.99	43.45	74	-30.55	peak	Vertical
2390	59.38	-12.99	46.39	74	-27.61	peak	Horizontal
2483.5	52.42	-12.78	39.64	74	-34.46	peak	Vertical
2483.5	51.11	-12.78	38.43	74	-35.57	peak	Horizontal
802.11n							
2390	57.26	-12.99	44.27	74	-29.73	peak	Vertical
2390	56.15	-12.99	43.16	74	-30.84	peak	Horizontal
2483.5	51.52	-12.78	38.74	74	-34.86	peak	Vertical
2483.5	52.51	-12.78	39.73	74	-34.27	peak	Horizontal

NOTE: The result(PK) less than AV limite, No need shown AV result.



Conducted Spurious Emissions at Antenna Port: 802.11b Low Channel

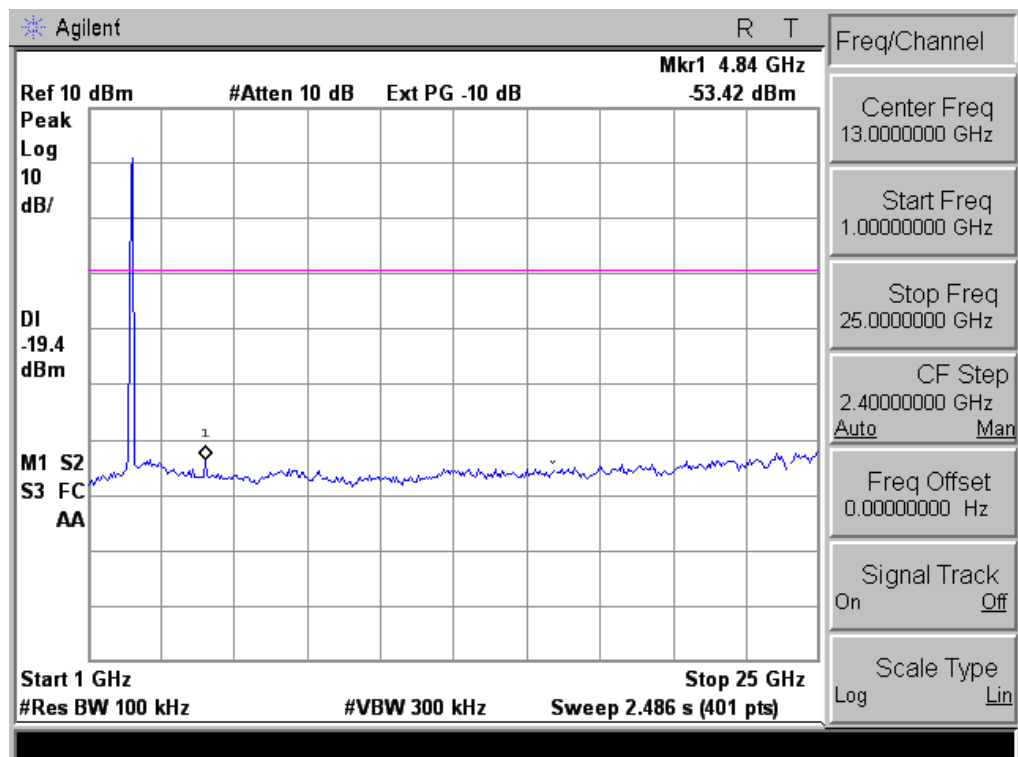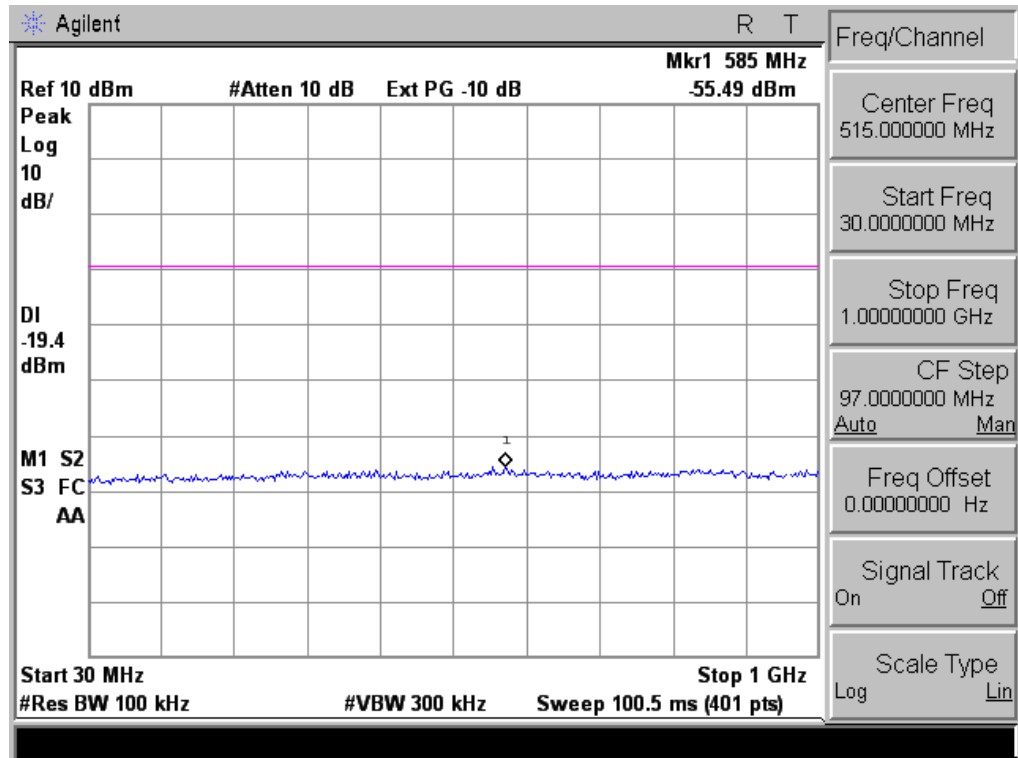



802.11b Middle Channel

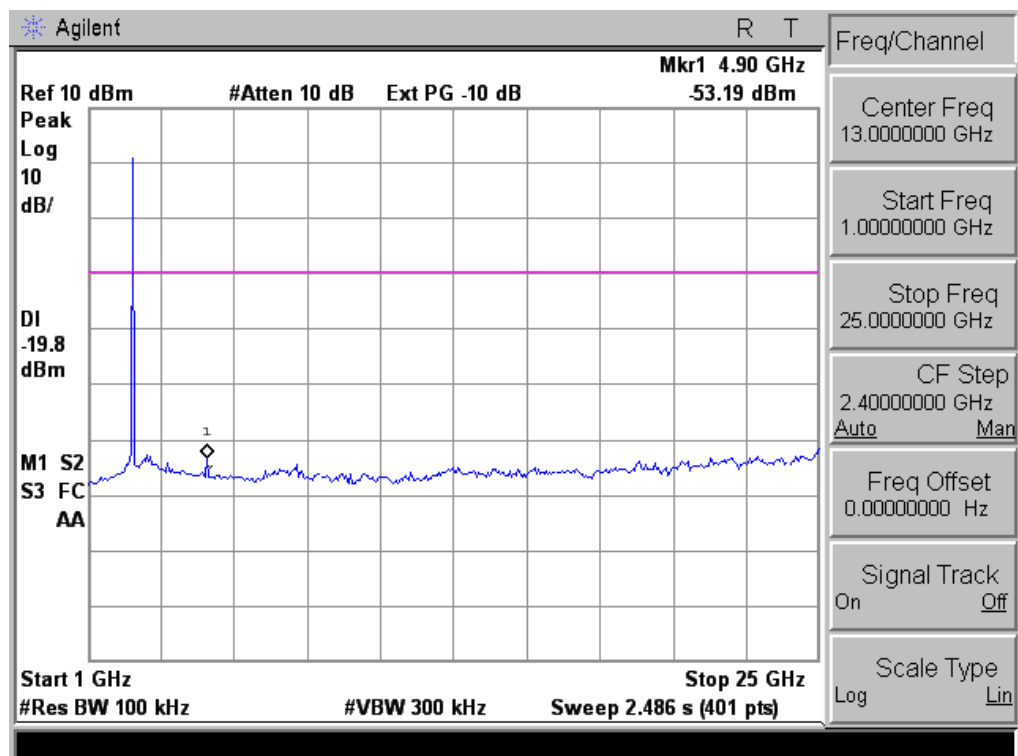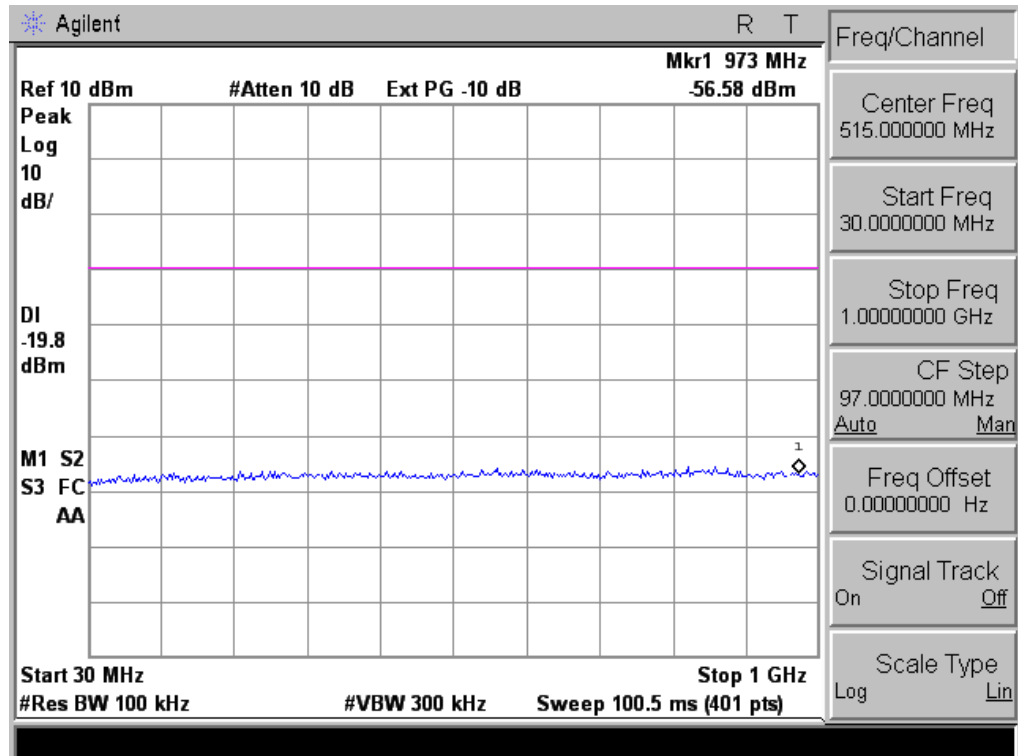



802.11b High Channel

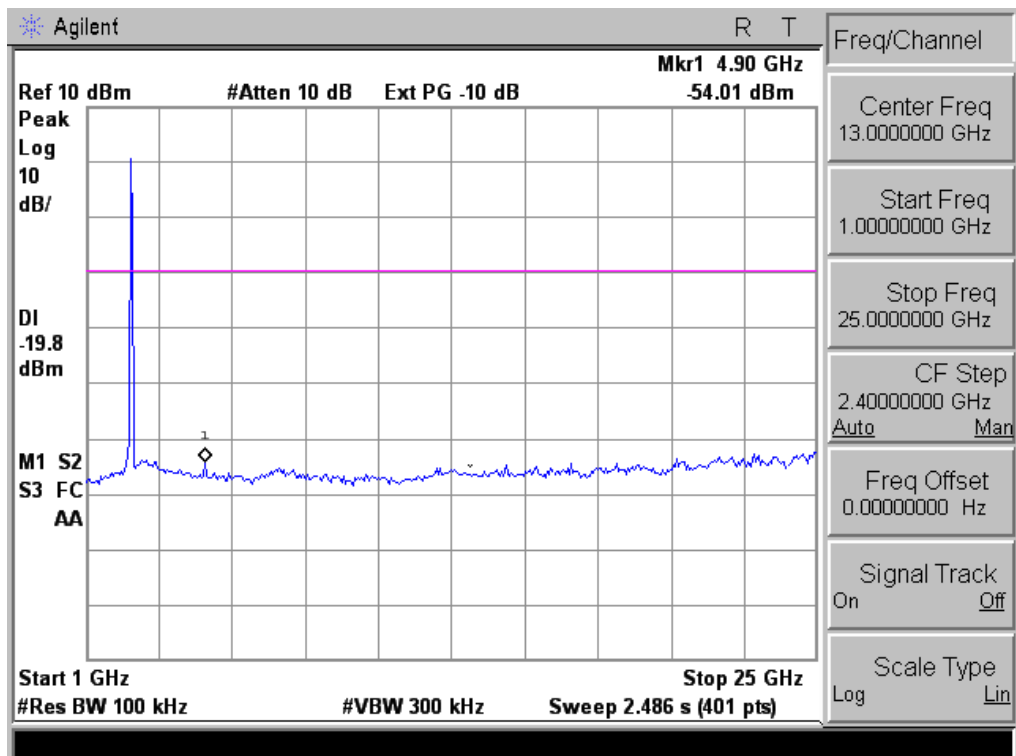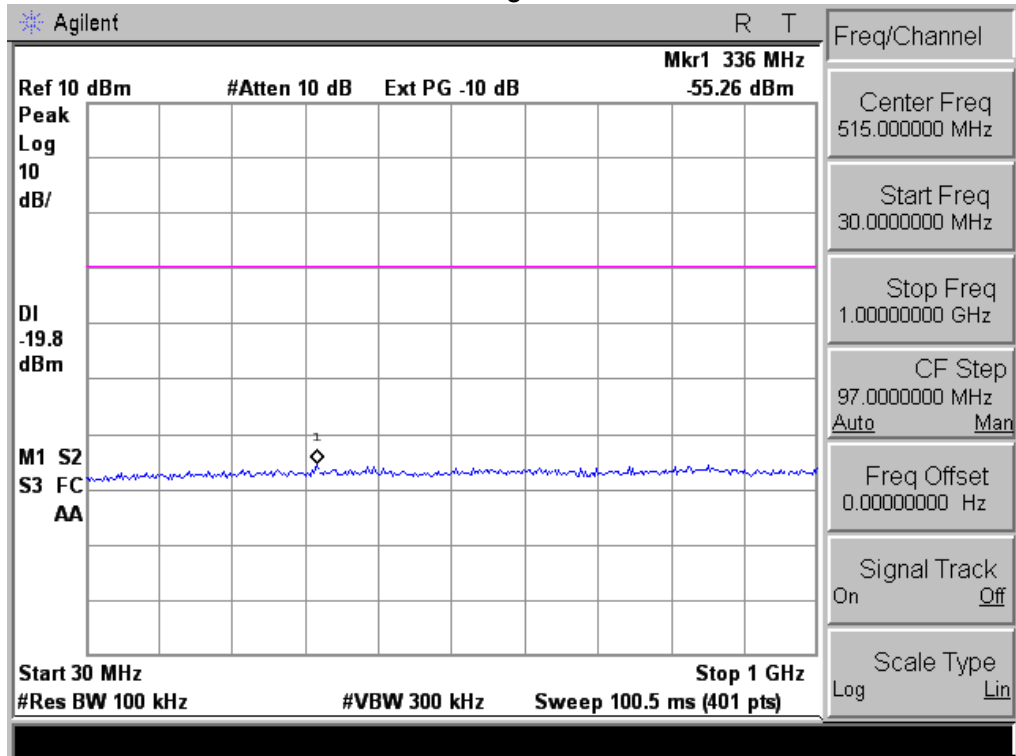



802.11g Low Channel

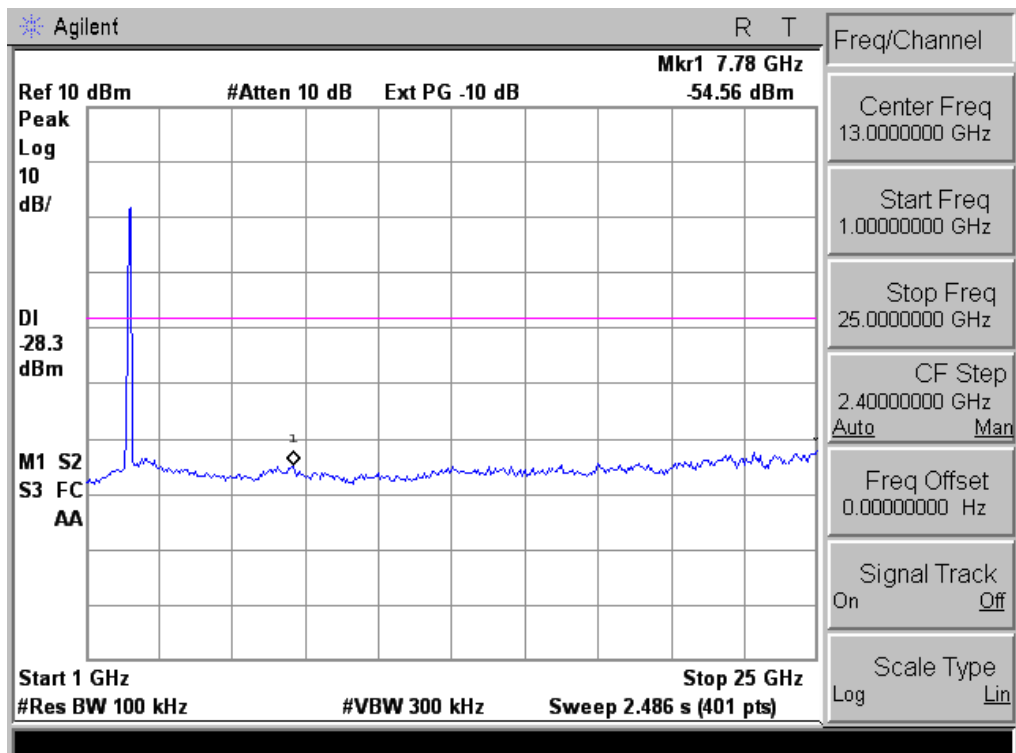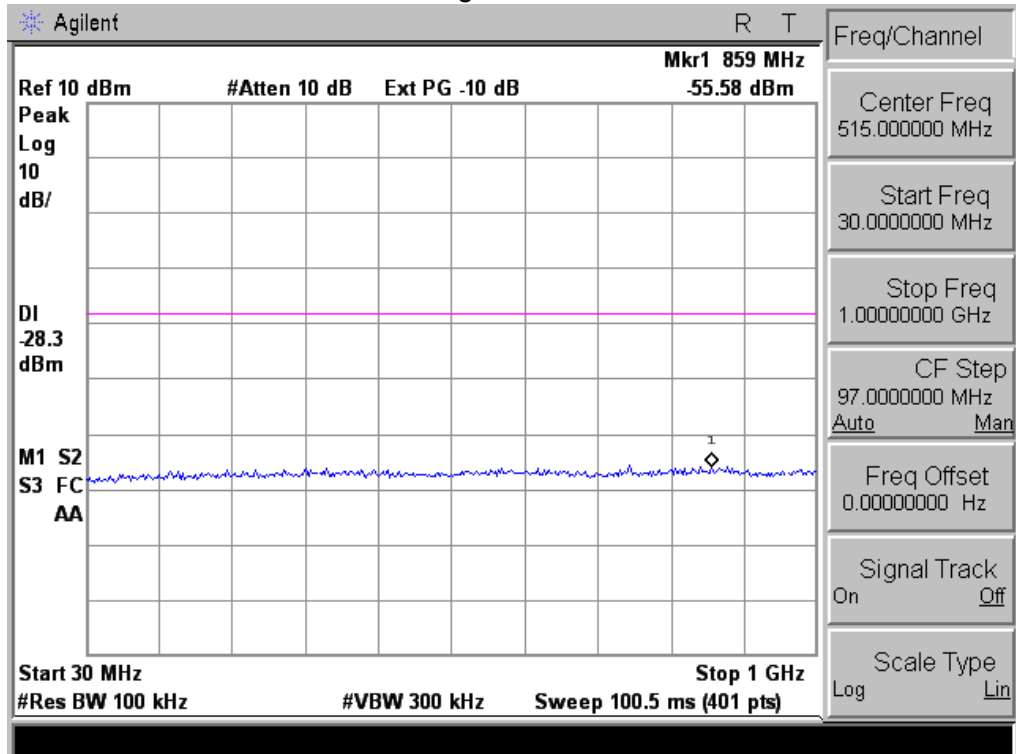



802.11g Middle Channel

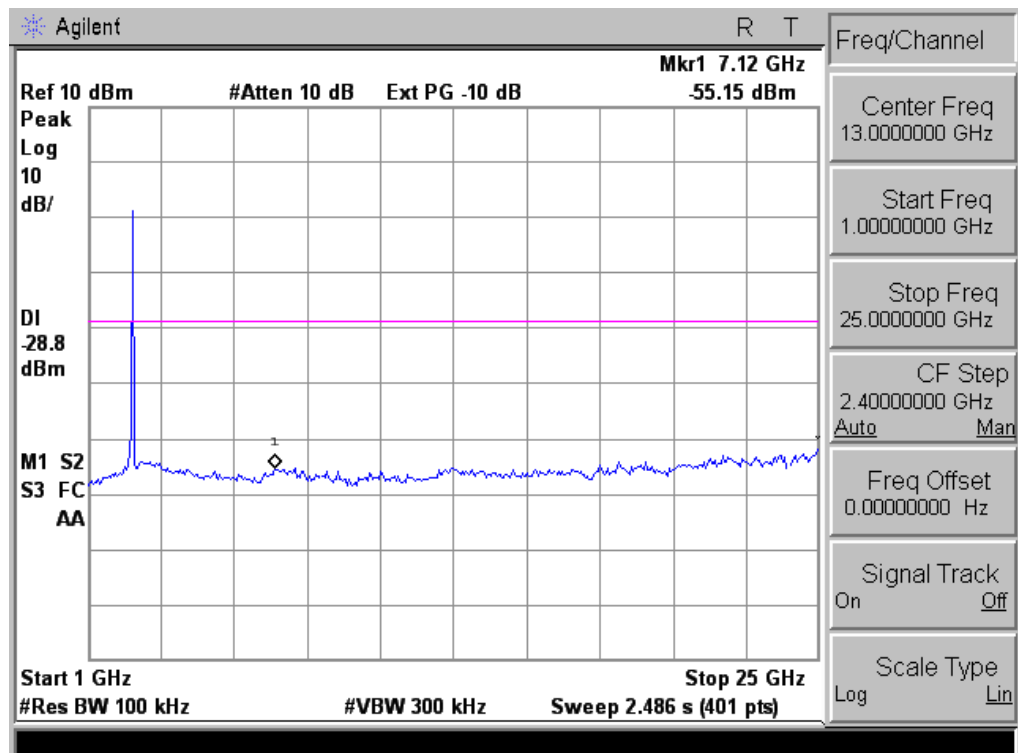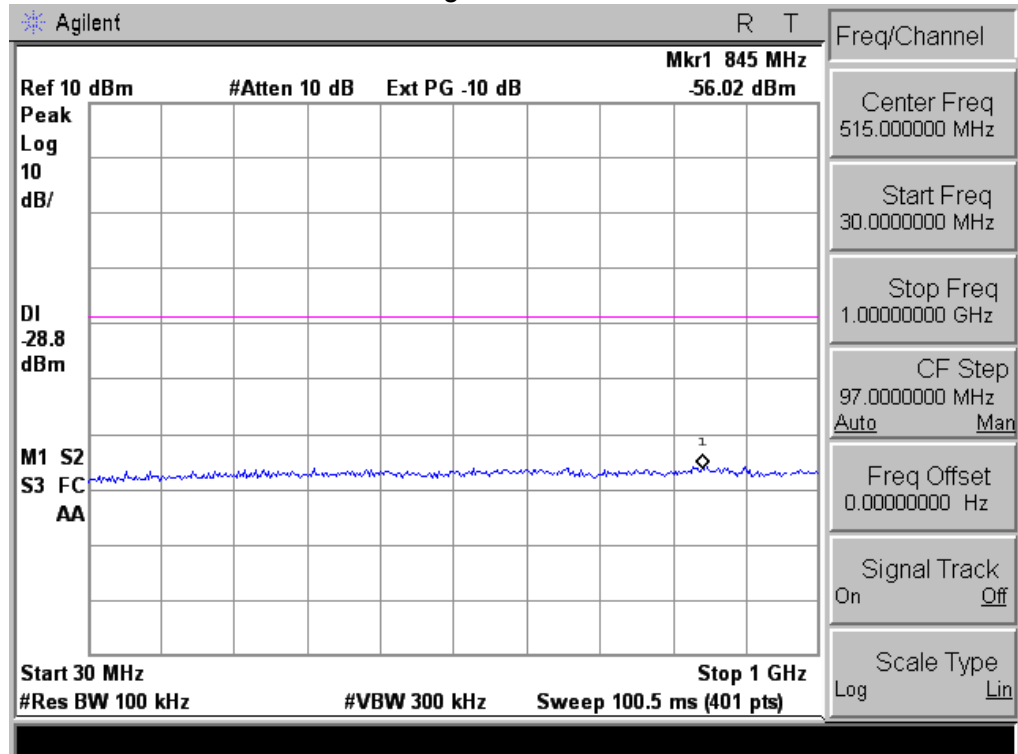



802.11g High Channel

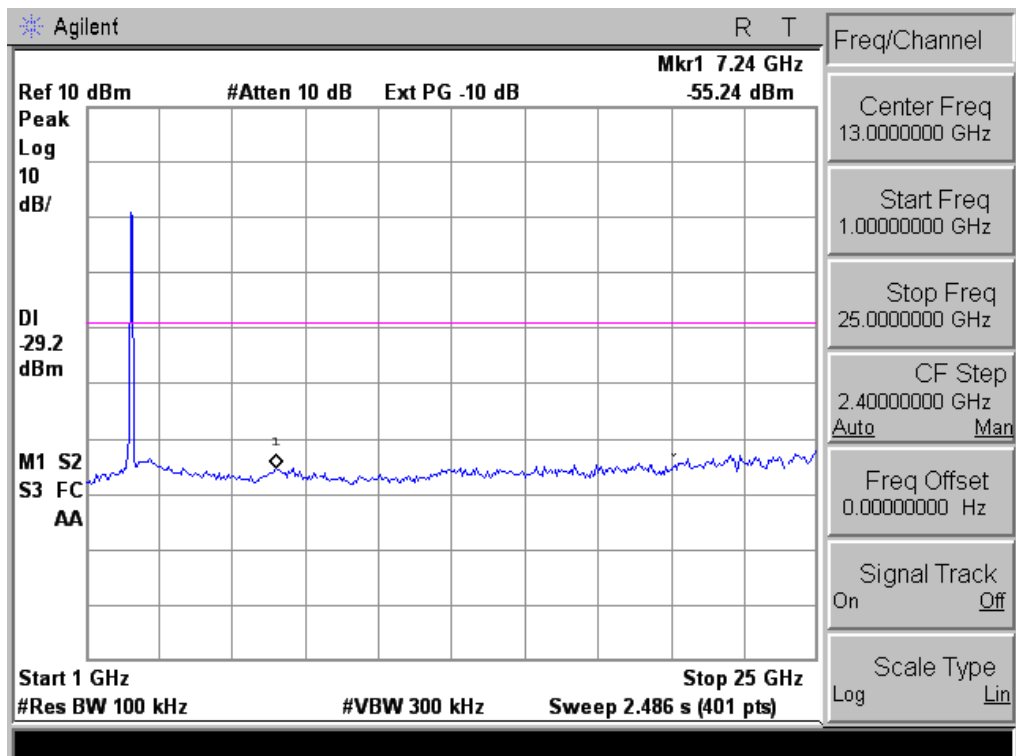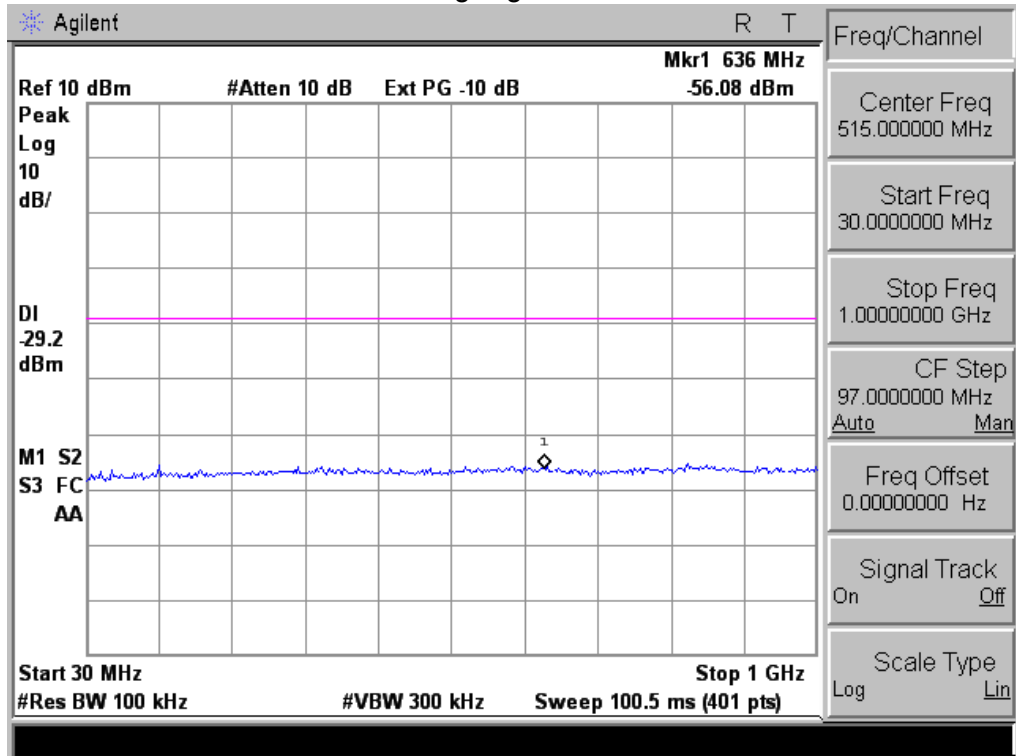



802.11n Low Channel

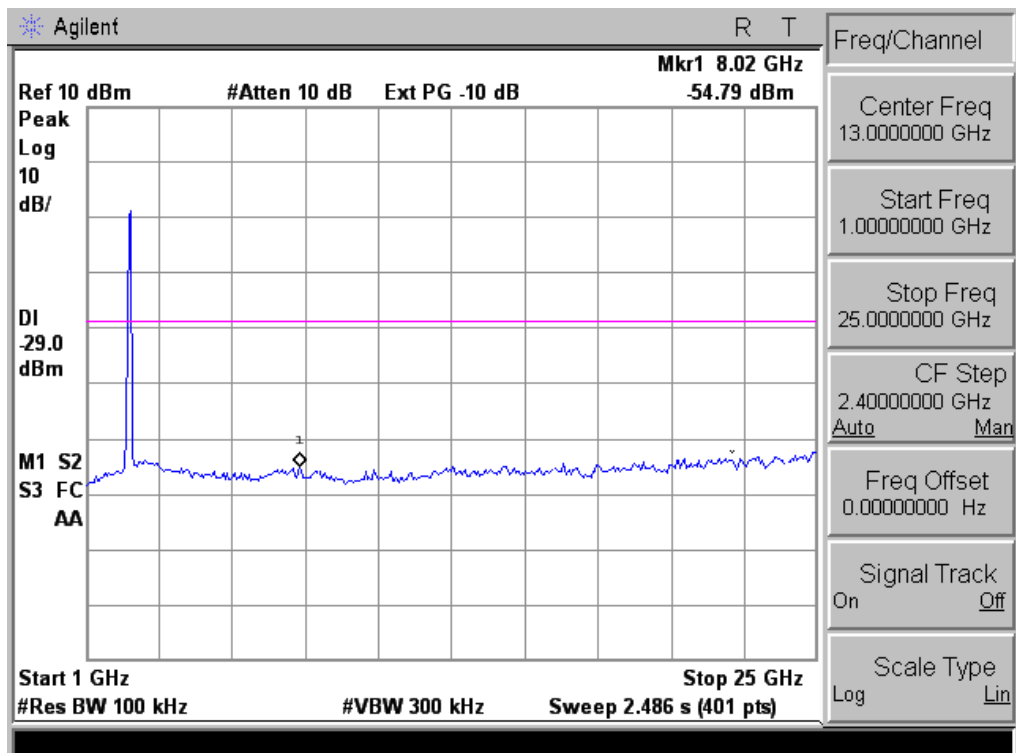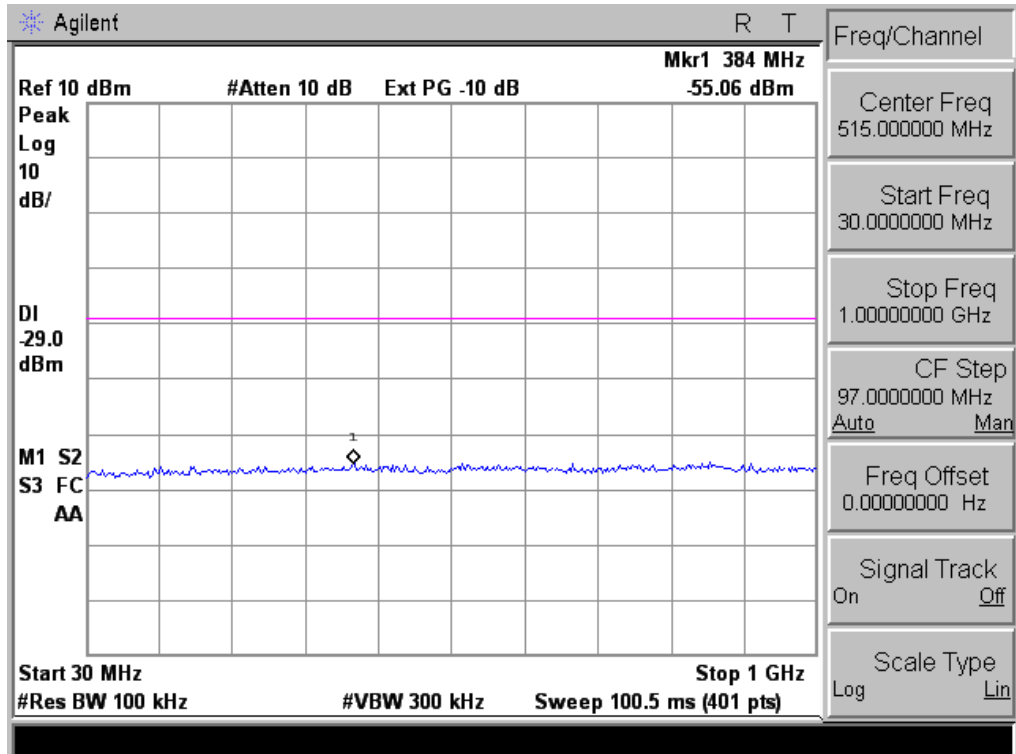

802.11n Middle Channel

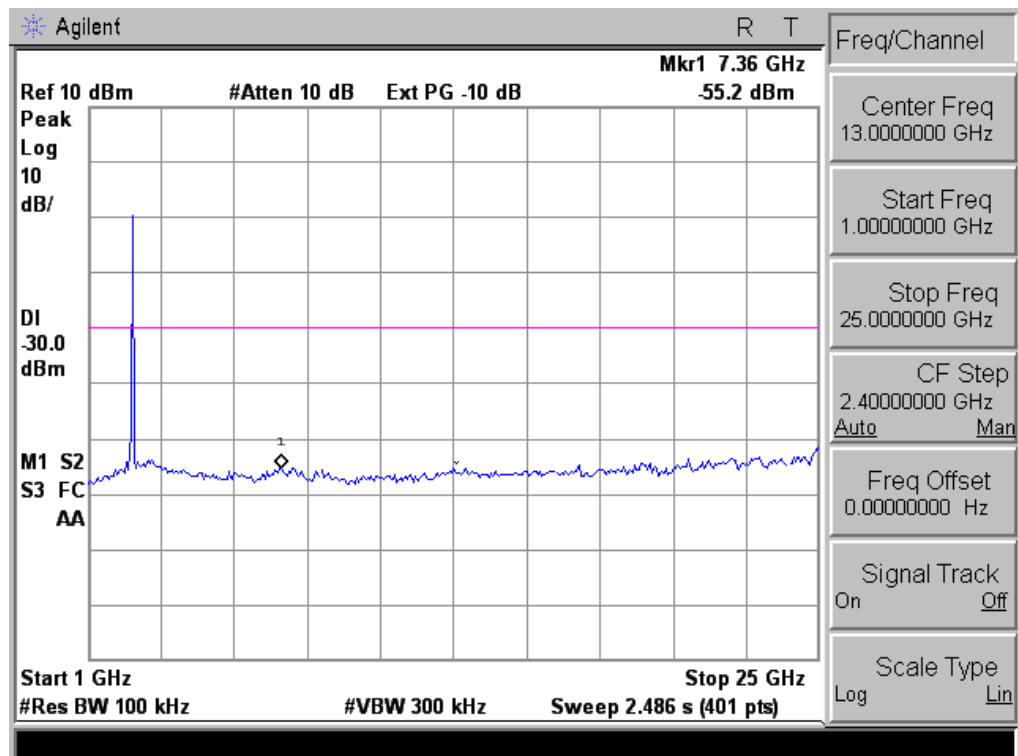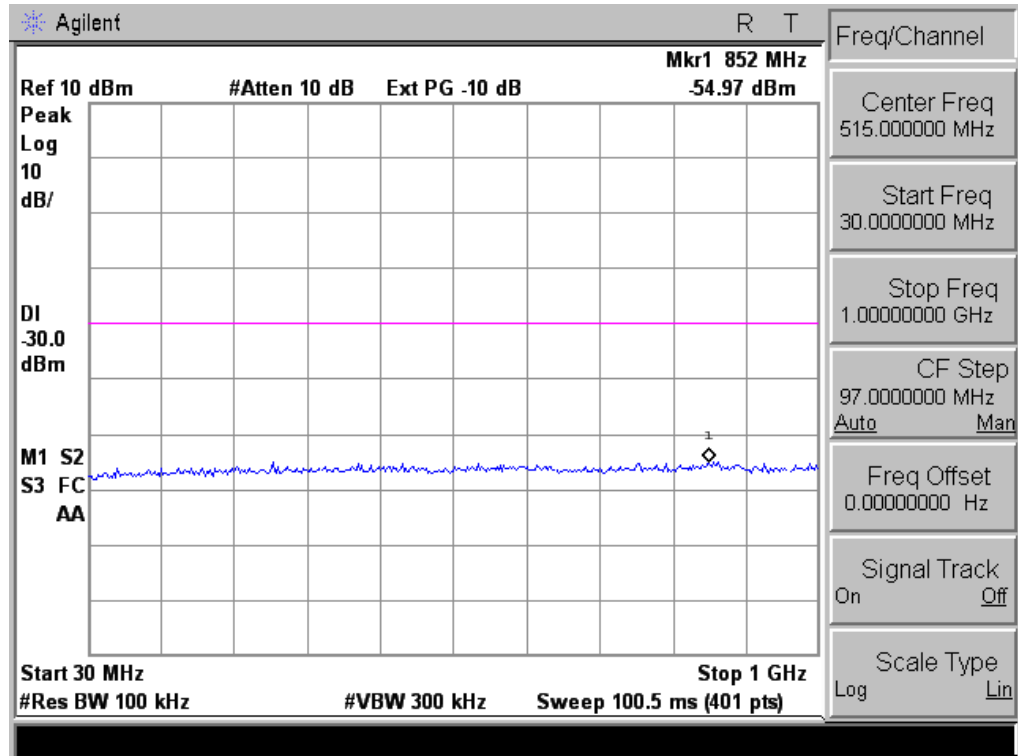

802.11n High Channel

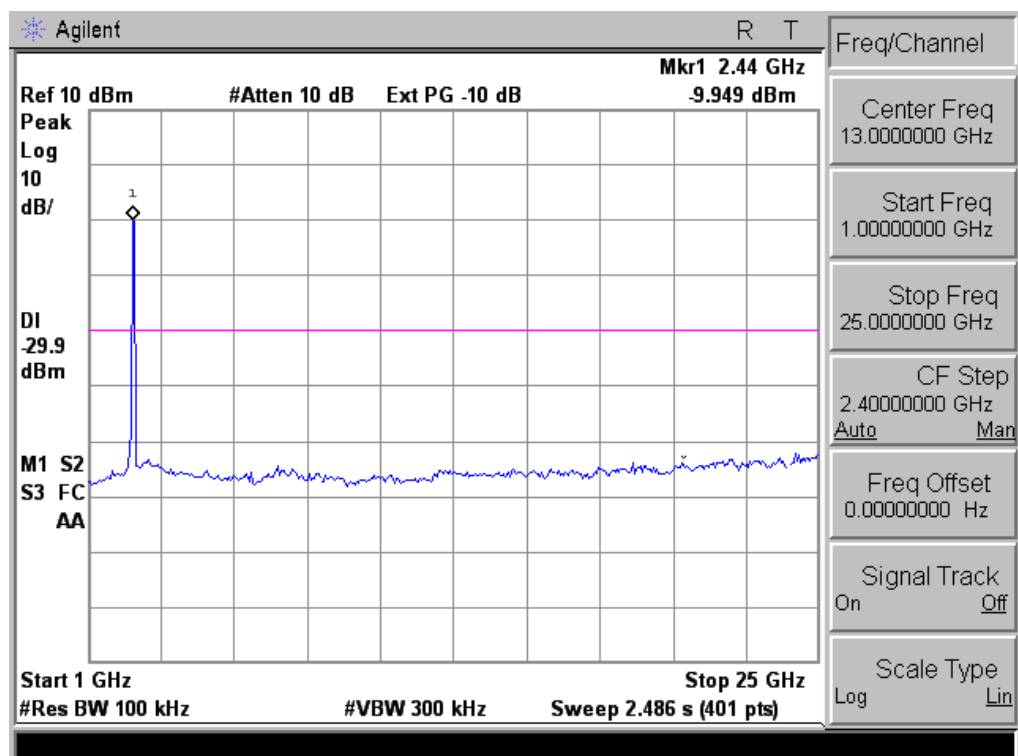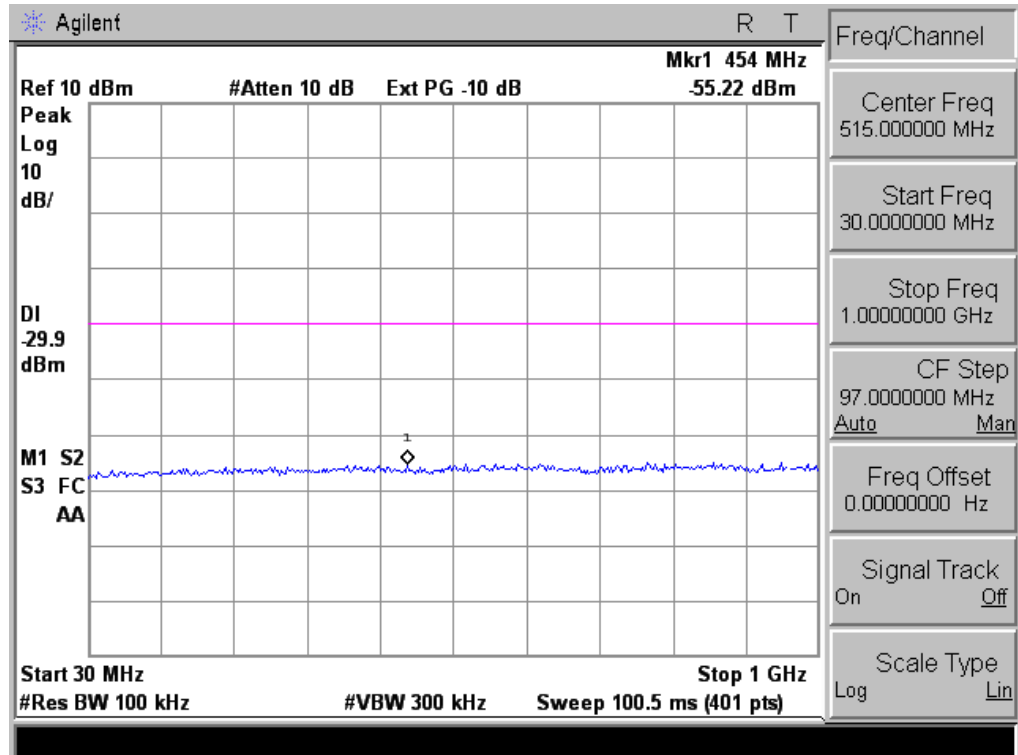

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW ≥ 3 kHz.
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP




4.1.4 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5 TEST RESULTS

EUT :	AOC Tablet	Model Name :	MW0733
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX b Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-17.24	8	PASS
2437 MHz	-17.68	8	PASS
2462 MHz	-17.10	8	PASS


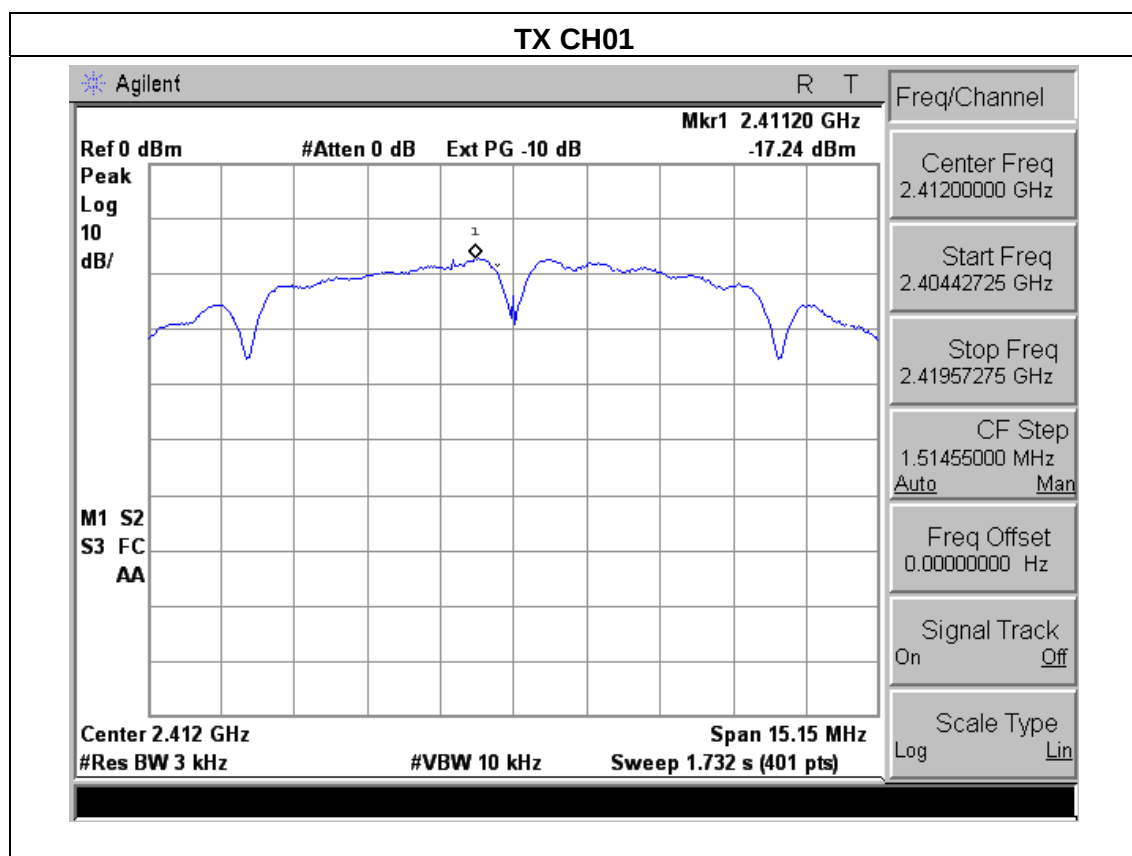


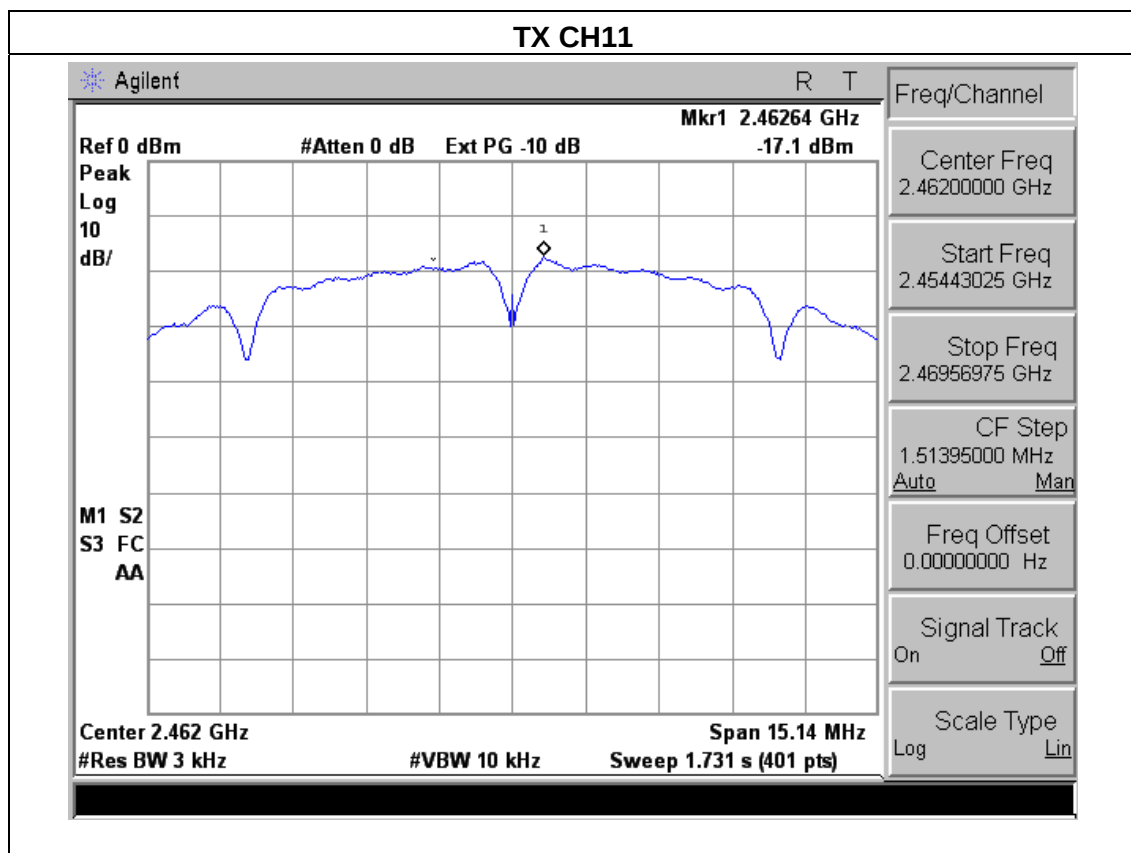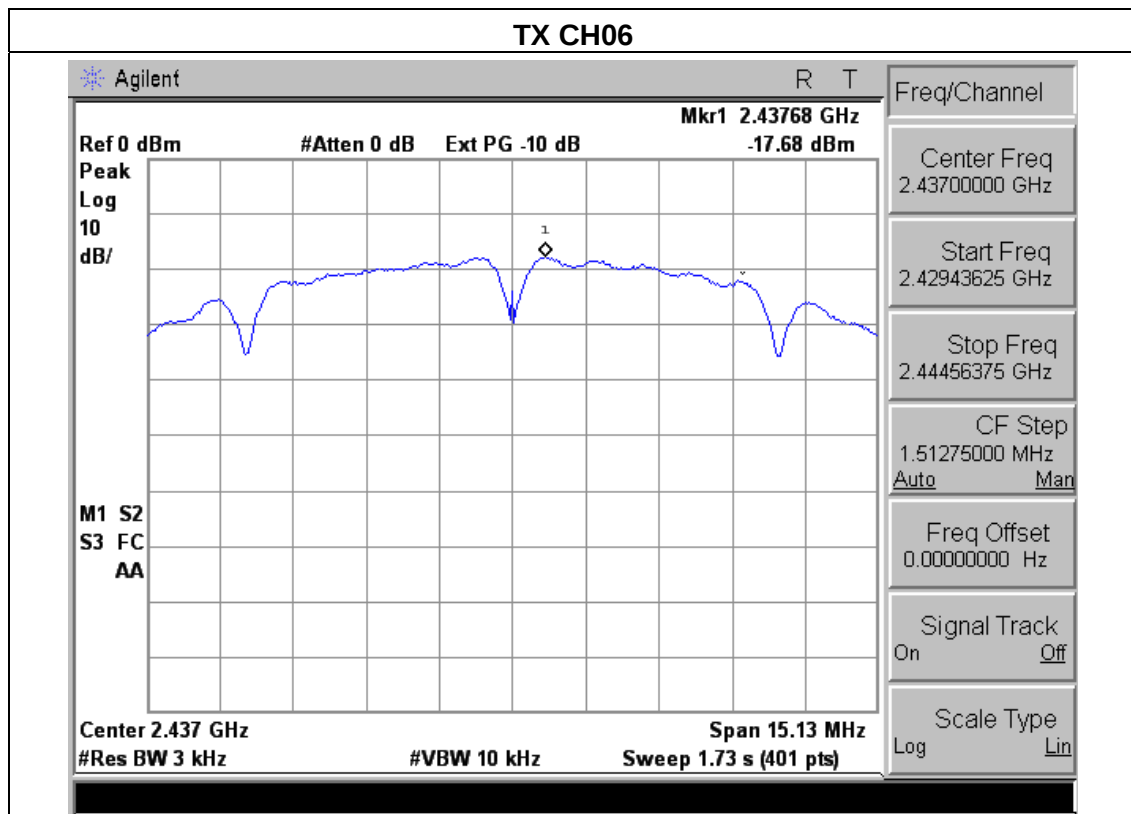

EUT :	AOC Tablet	Model Name :	MW0733
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX g Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-22.99	8	PASS
2437 MHz	-22.18	8	PASS
2462 MHz	-22.36	8	PASS

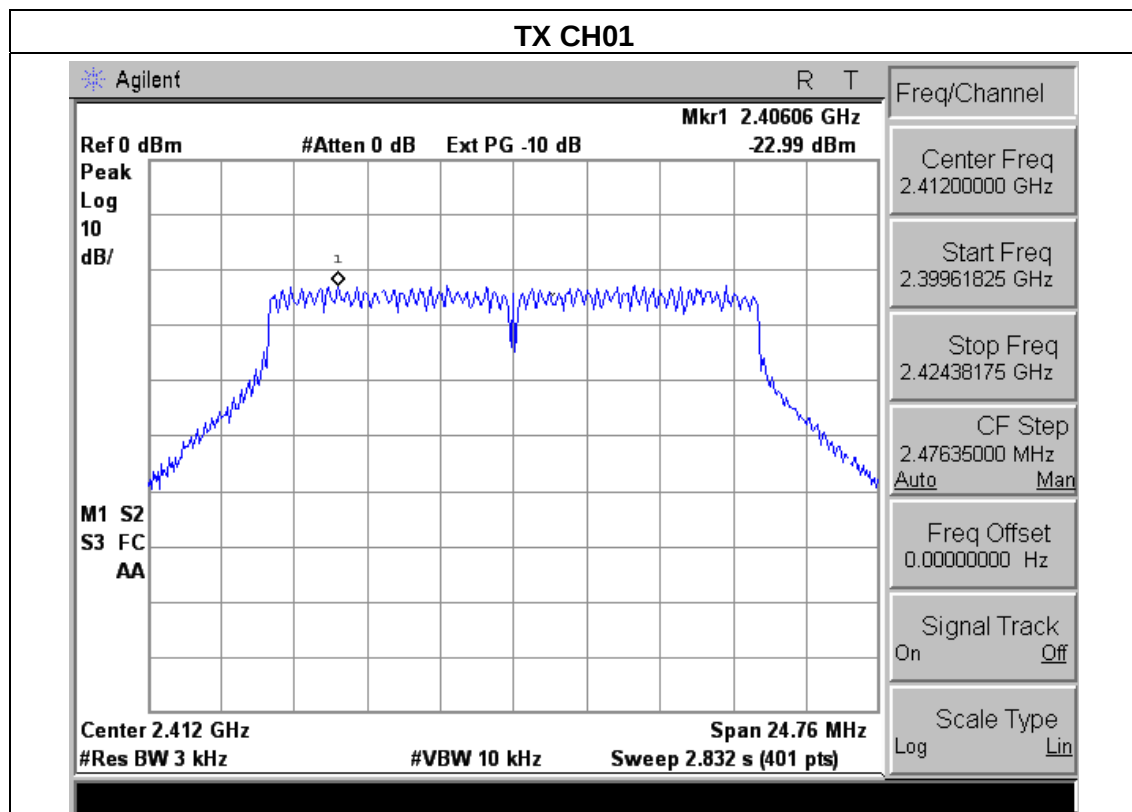

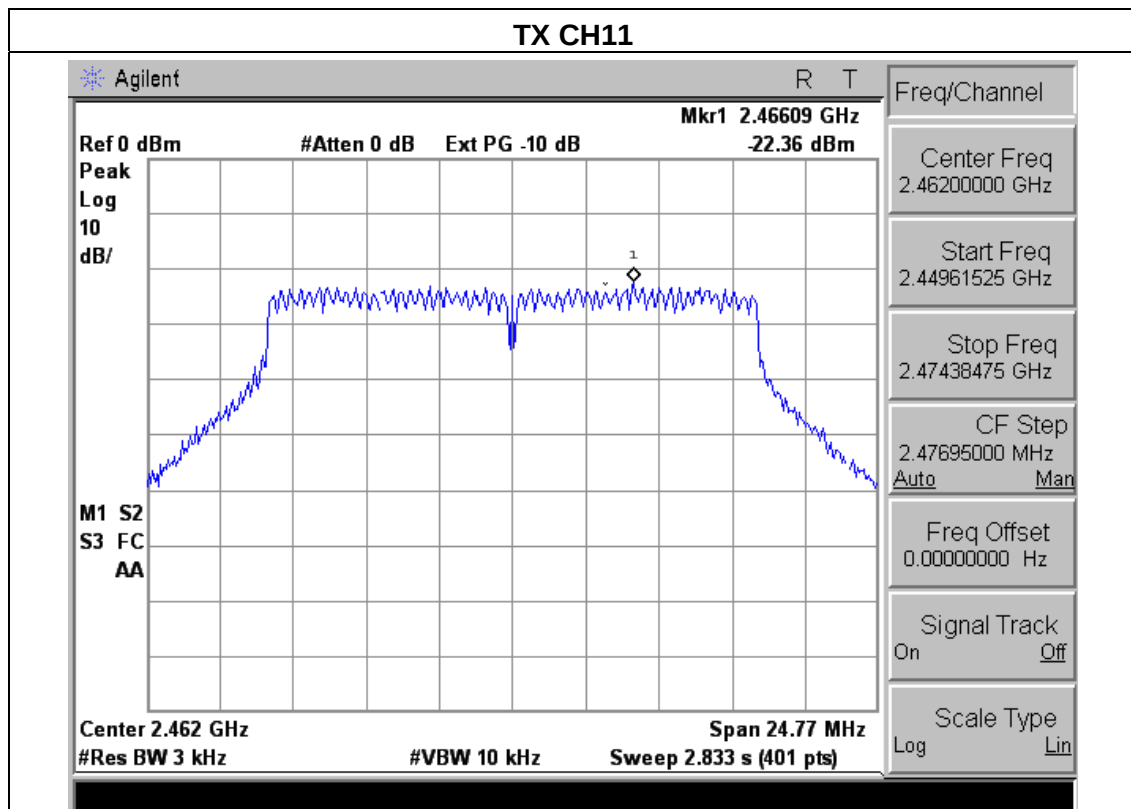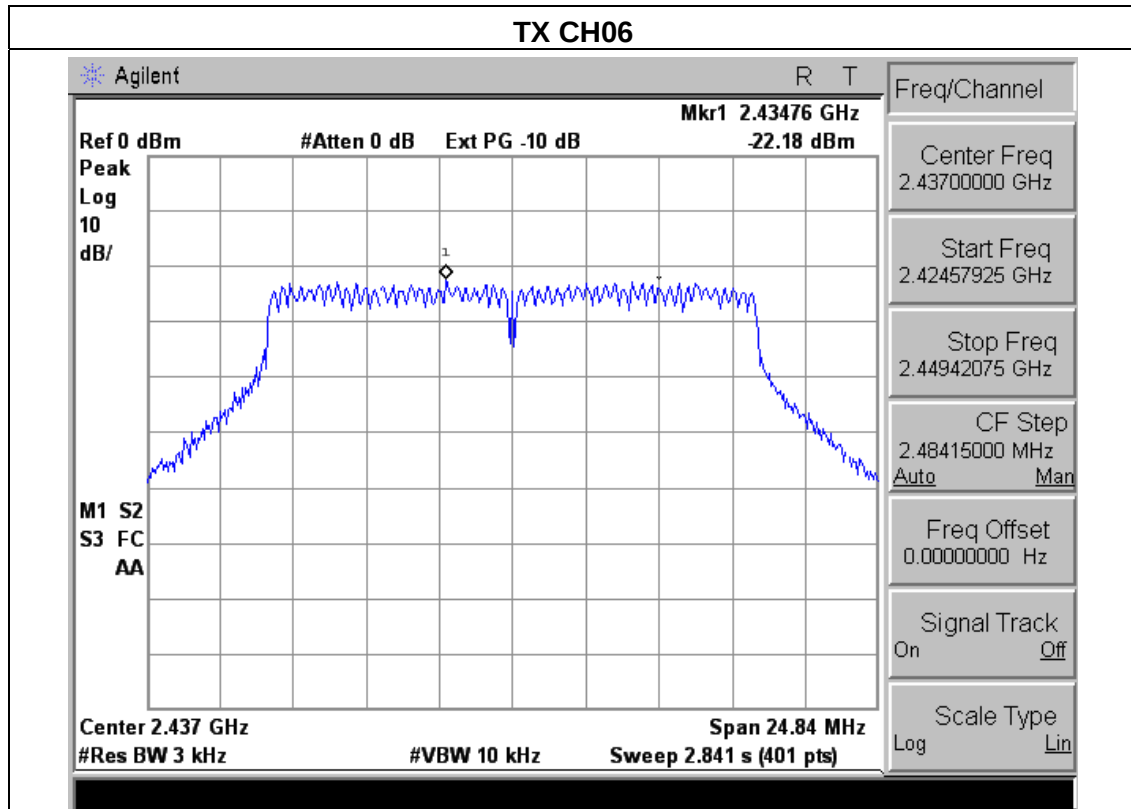


EUT :	AOC Tablet	Model Name :	MW0733
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-21.87	8	PASS
2437 MHz	-21.97	8	PASS
2462 MHz	-21.87	8	PASS

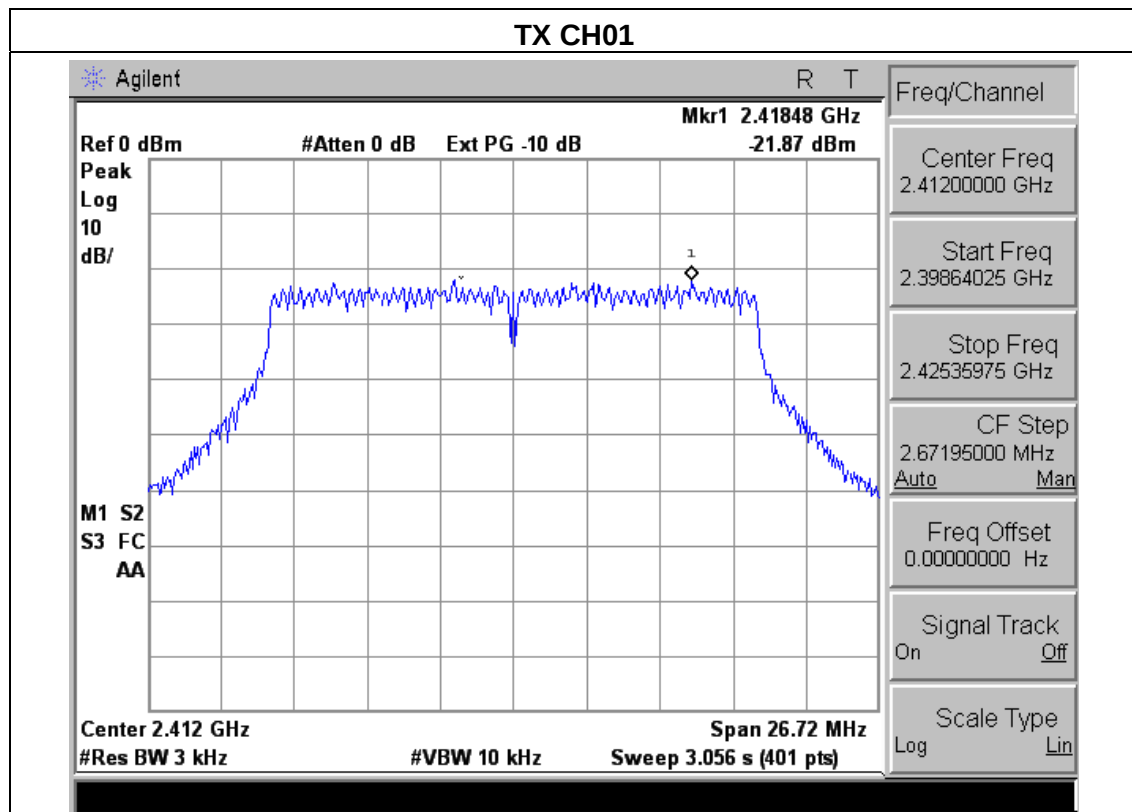

TX CH06

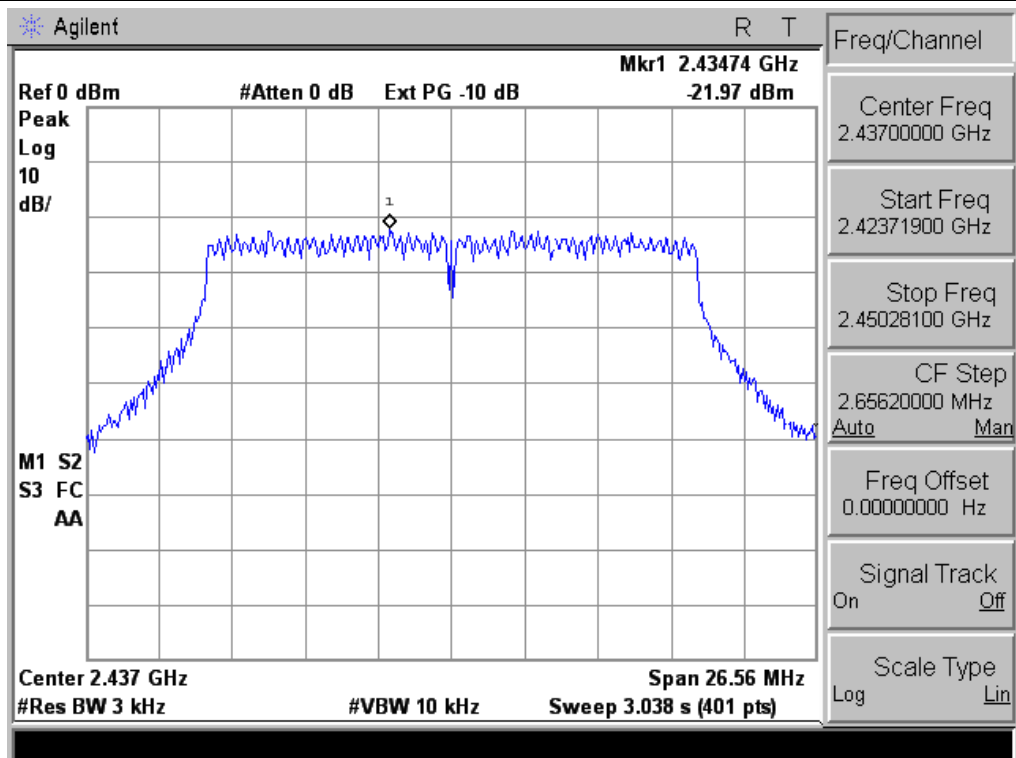

TX CH11

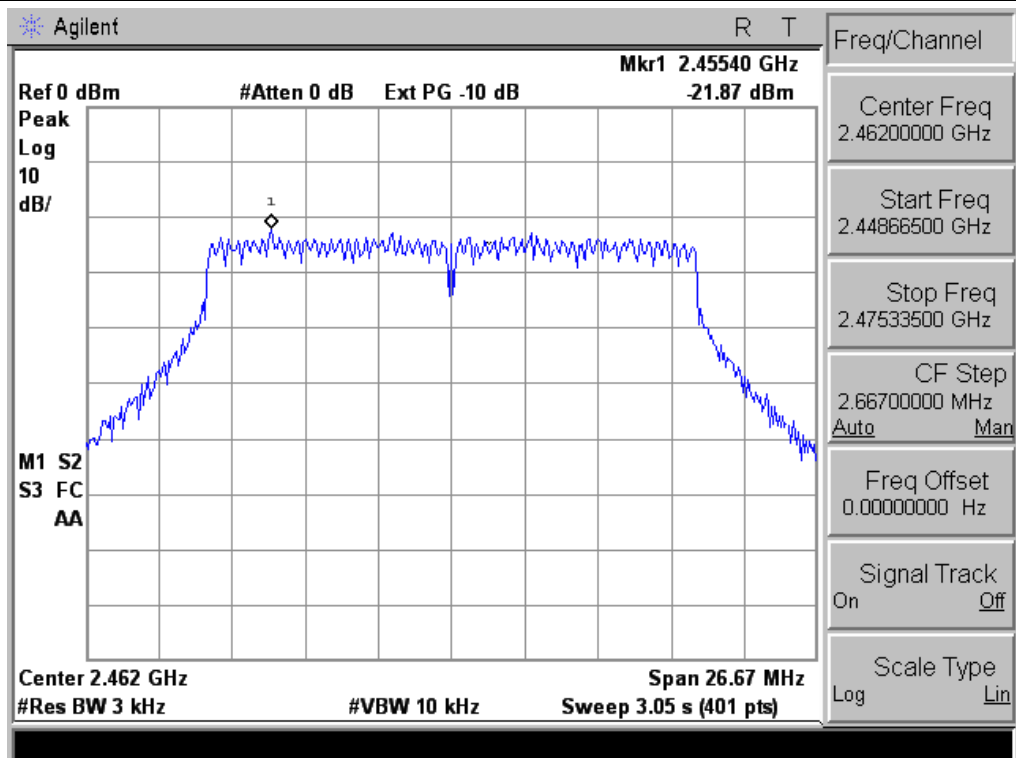

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS


5.1.1 TEST PROCEDURE

1. Set RBW= 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

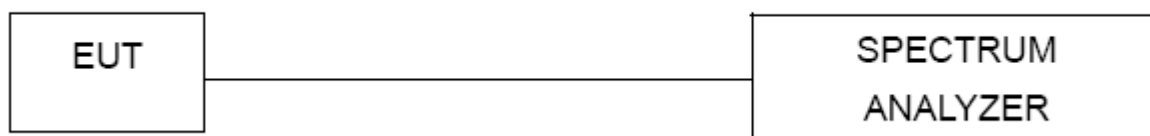

5.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS


EUT :	AOC Tablet	Model Name :	MW0733
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX b Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.10	500	Pass
Middle	2437	10.09	500	Pass
High	2462	10.09	500	Pass


TX CH 01

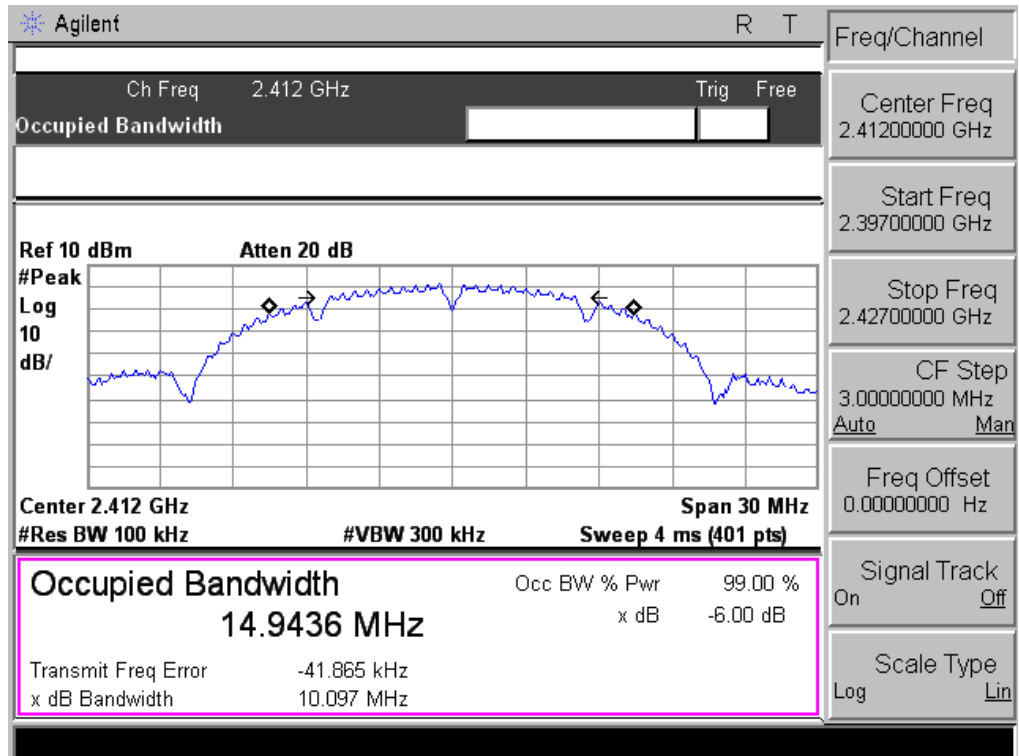

TX CH 06

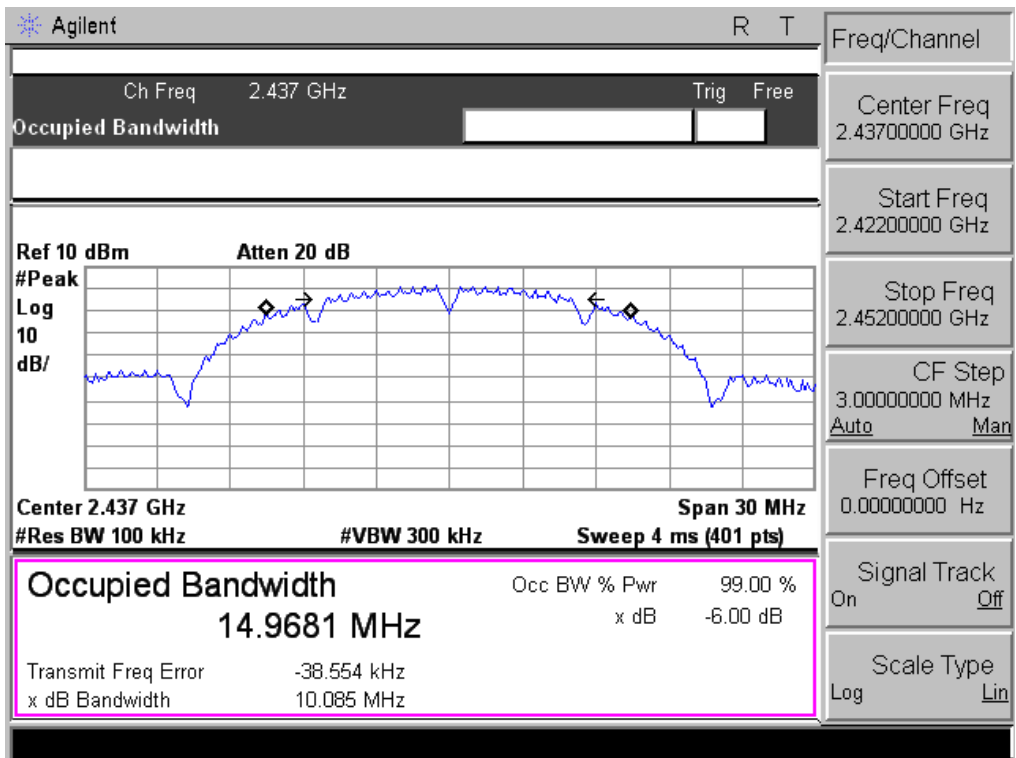


TX CH 11

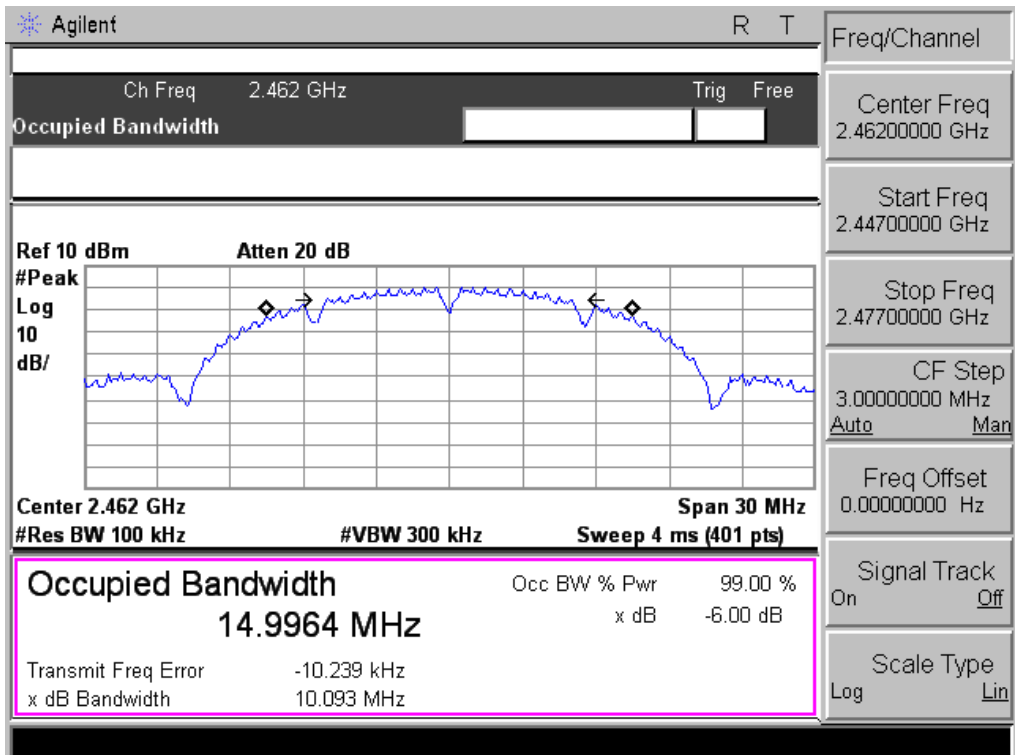


EUT :	AOC Tablet	Model Name :	MW0733
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX g Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.51	500	Pass
Middle	2437	16.56	500	Pass
High	2462	16.51	500	Pass


TX CH 01

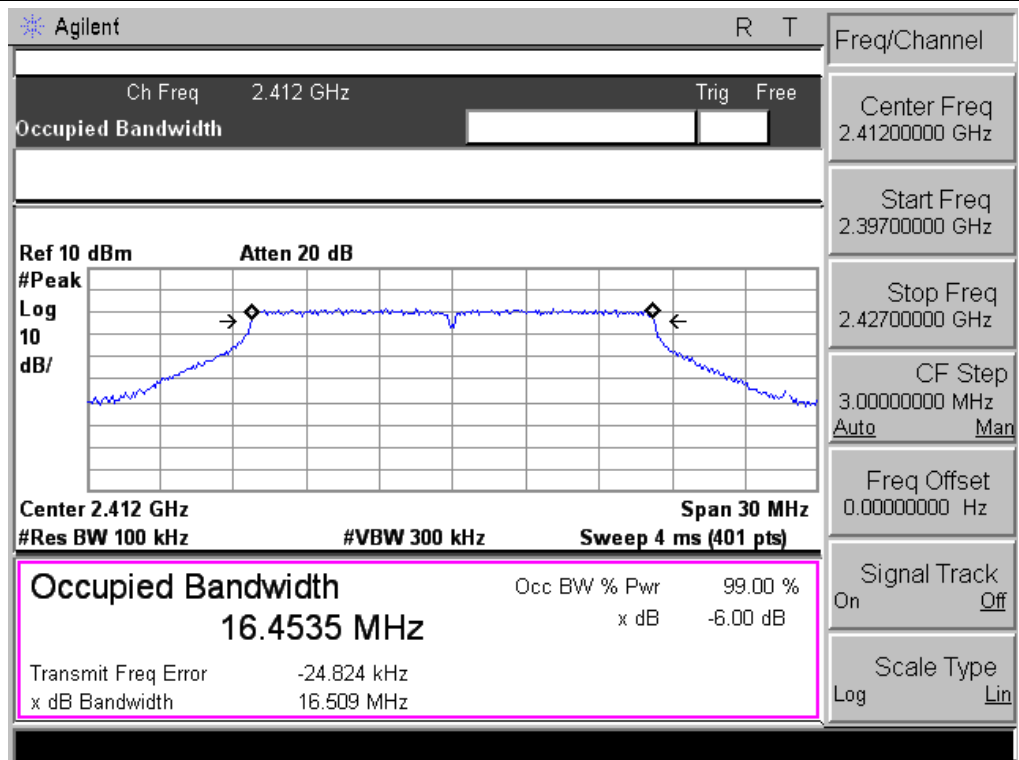

TX CH 06

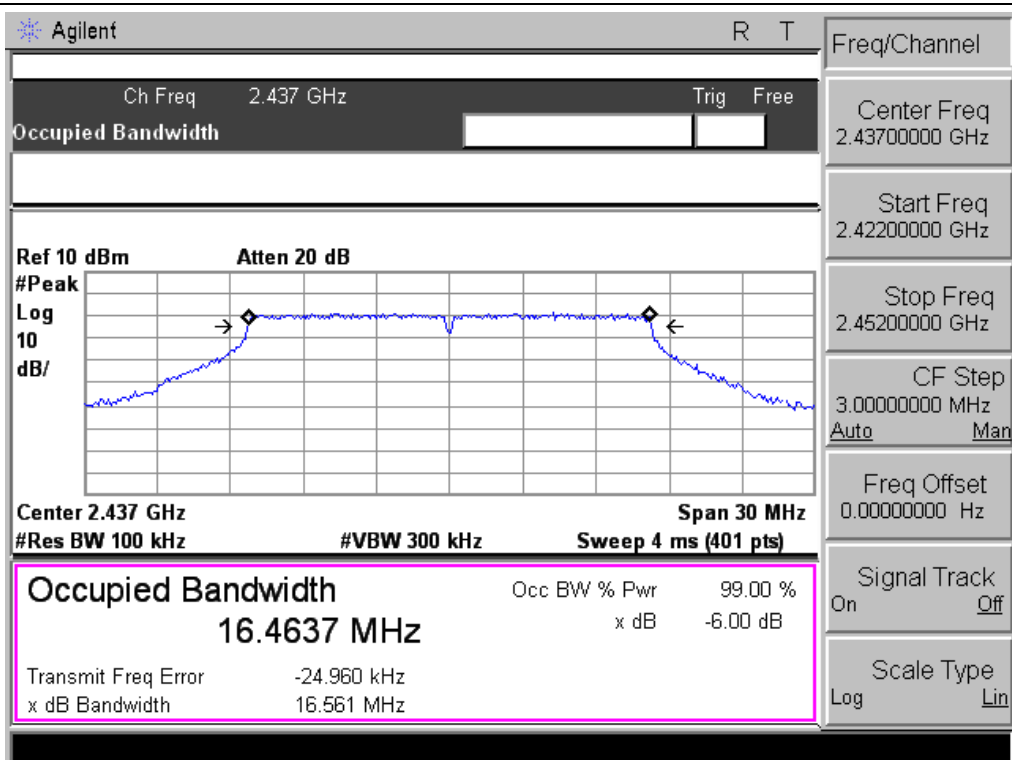


TX CH 11

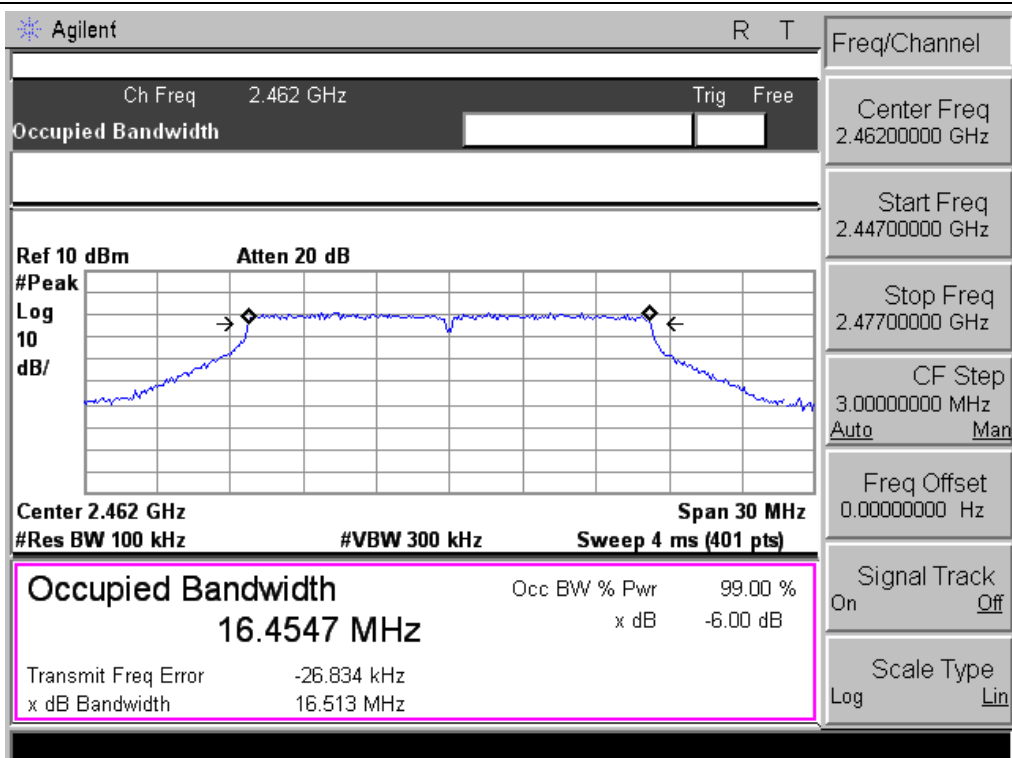


EUT :	AOC Tablet	Model Name :	MW0733
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.81	500	Pass
Middle	2437	17.71	500	Pass
High	2462	17.78	500	Pass


TX CH 01

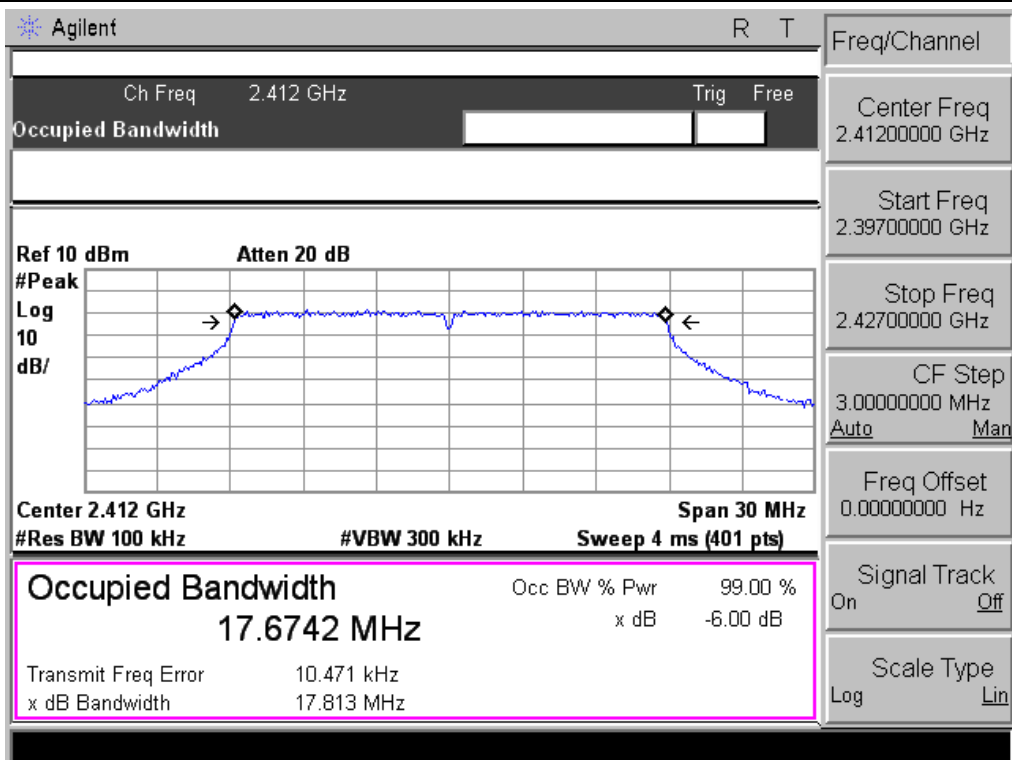

TX CH 06

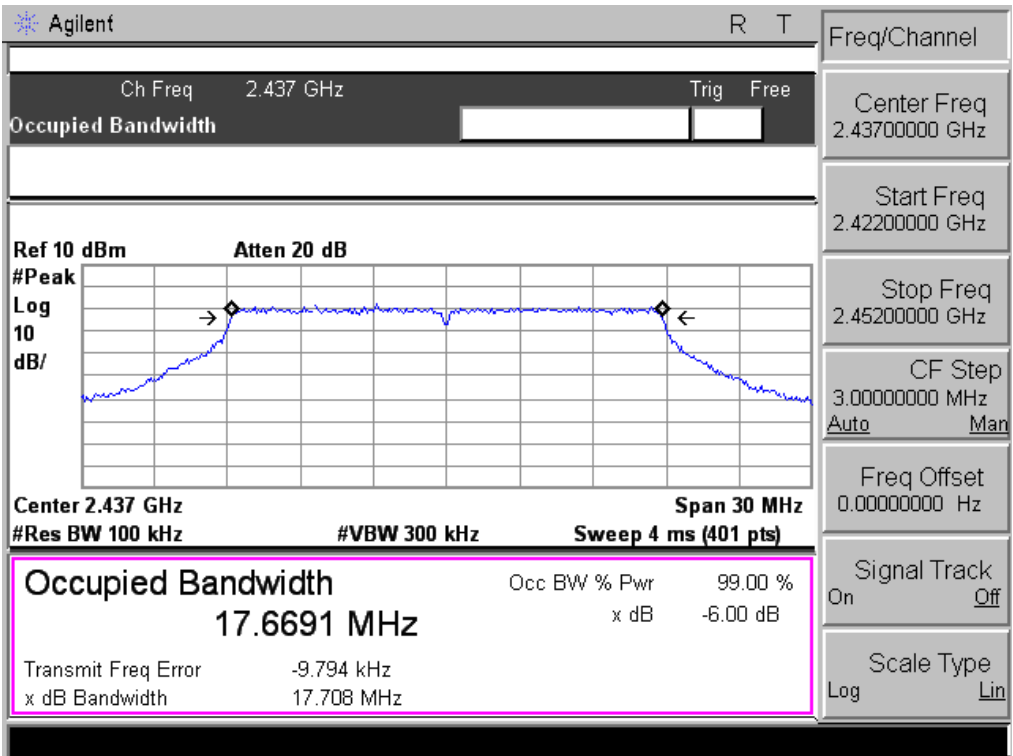

TX CH 11

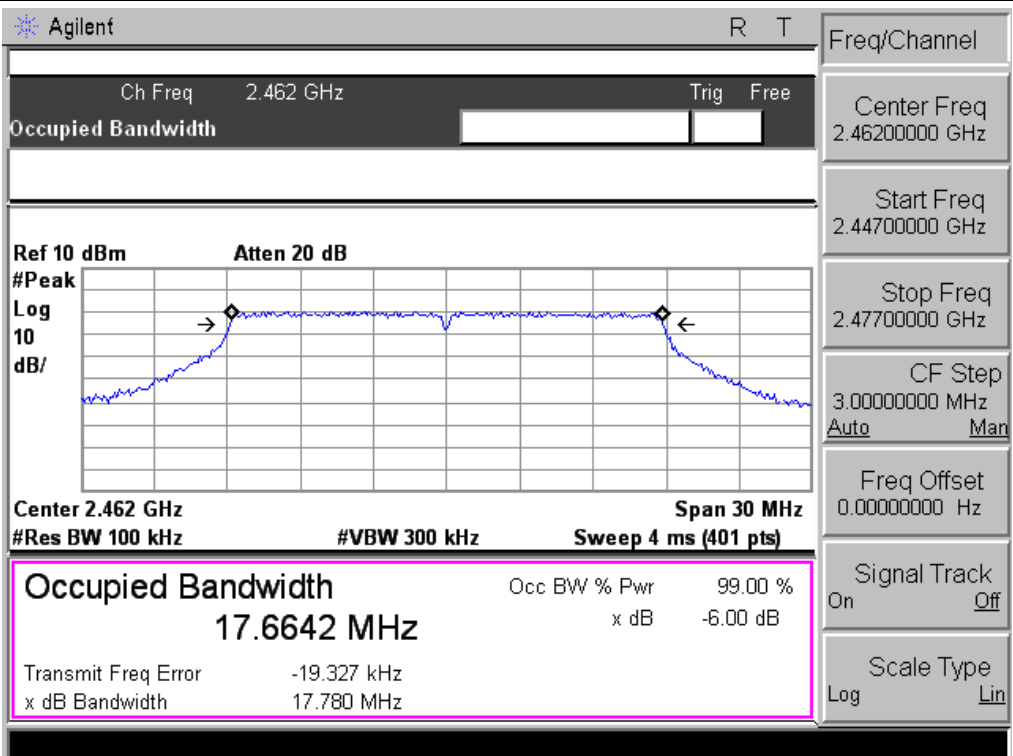

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

EUT :	AOC Tablet	Model Name :	MW0733
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX b/g/n Mode /CH01, CH06, CH11		

TX 802.11b Mode				
Test Channel	Frequency	Maximum Conducted Output Power(PK)	Maximum Conducted Output Power(AV)	LIMIT
	(MHz)	(dBm)	(dBm)	dBm
CH01	2412	12.61	9.31	30
CH06	2437	12.59	9.21	30
CH11	2462	12.42	9.01	30
TX 802.11g Mode				
CH01	2412	11.79	9.05	30
CH06	2437	11.65	8.76	30
CH11	2462	11.70	8.81	30
TX 802.11n Mode				
CH01	2412	10.78	8.12	30
CH06	2437	10.72	8.01	30
CH11	2462	10.64	7.94	30

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

7.1 DEVIATION FROM STANDARD

No deviation.

7.2 TEST SETUP



7.3 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.4 TEST RESULTS


EUT :	AOC Tablet	Model Name :	MW0733
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V

Frequency Band	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
802.11b mode			
Left-band	38.27	20	Pass
Right-band	55.71	20	Pass
802.11g mode			
Left-band	32.19	20	Pass
Right-band	46.93	20	Pass
802.11n mode			
Left-band	31.05	20	Pass
Right-band	45.11	20	Pass


802.11b: Band Edge, Left Side

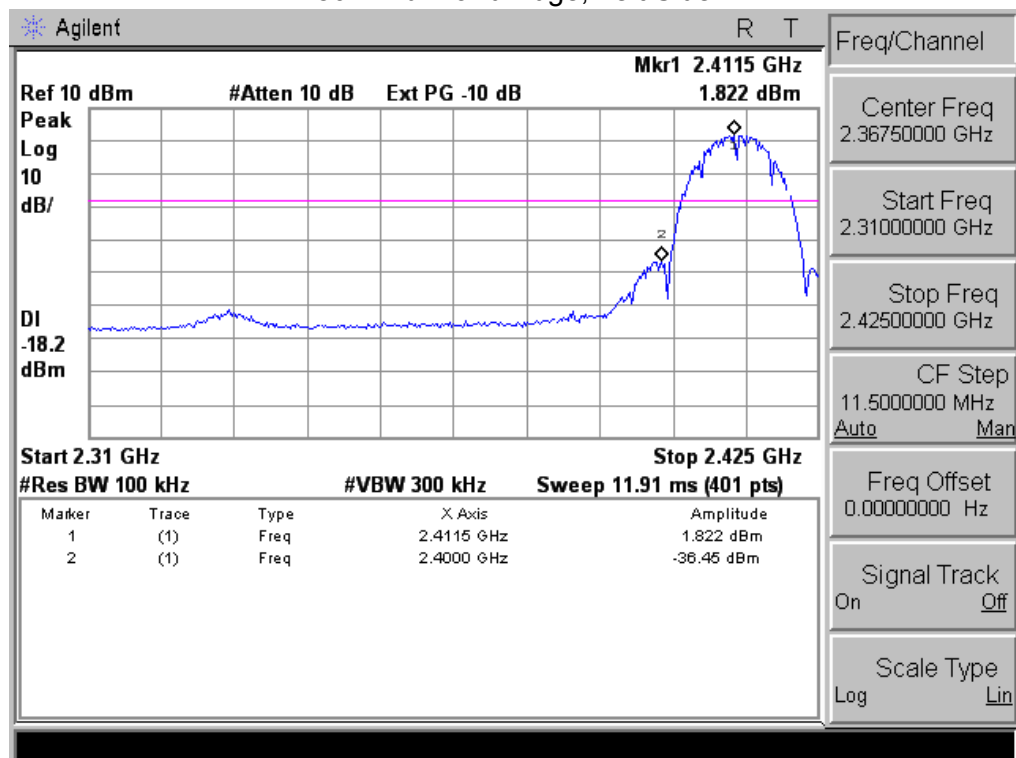


802.11b: Band Edge, Right Side

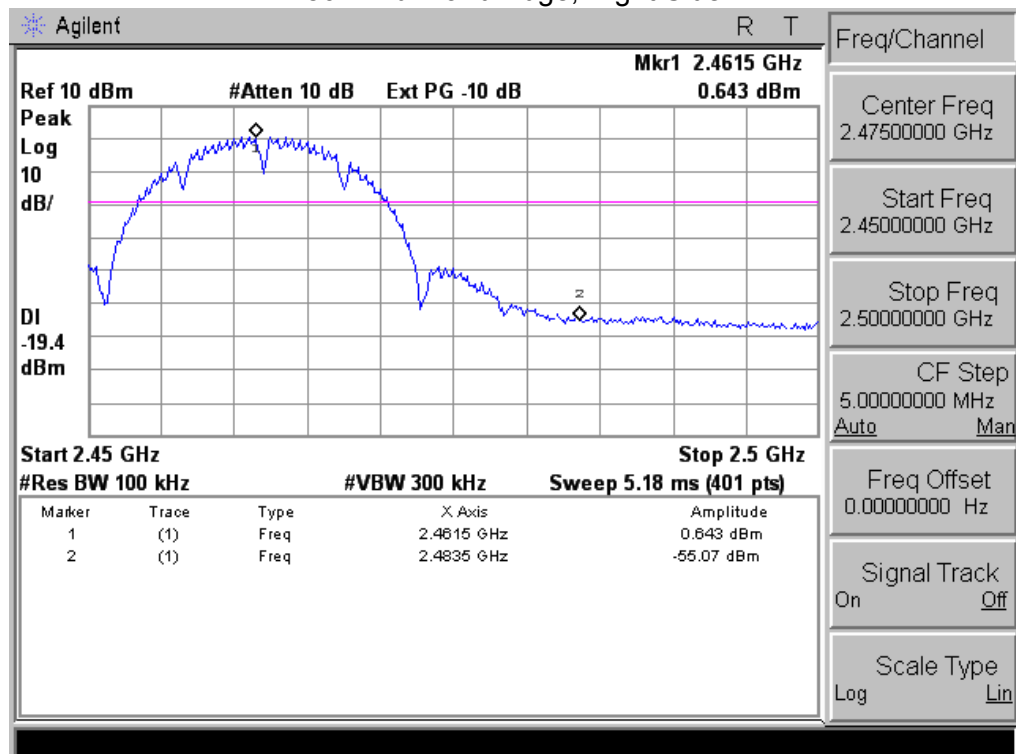


802.11g: Band Edge, Left Side

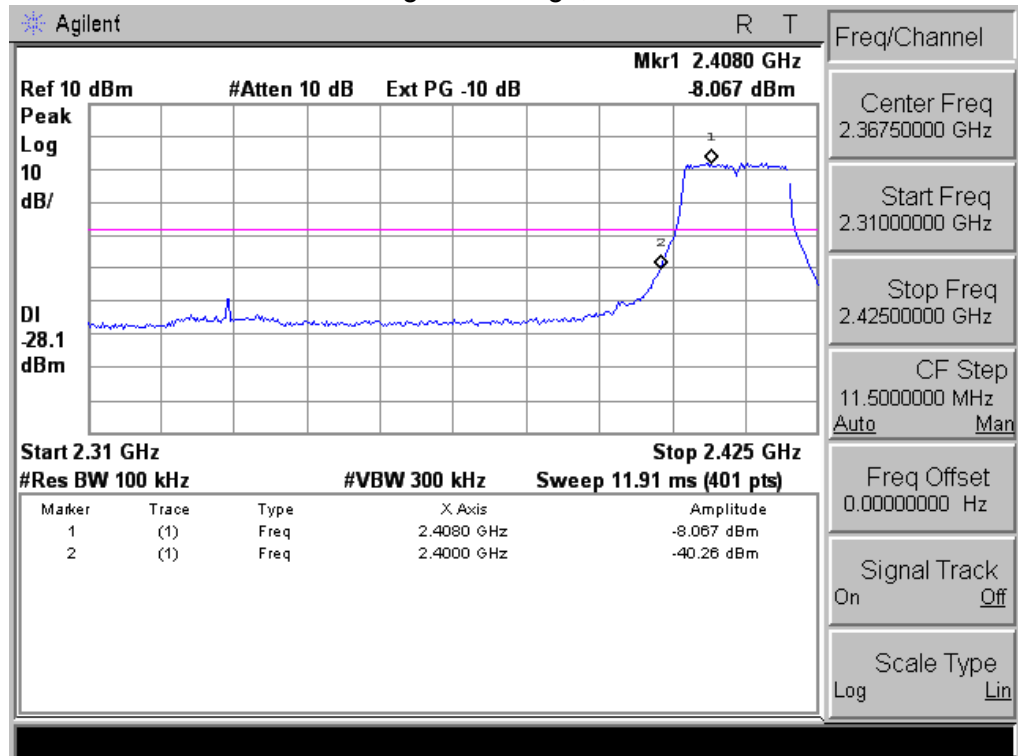


802.11g: Band Edge, Right Side

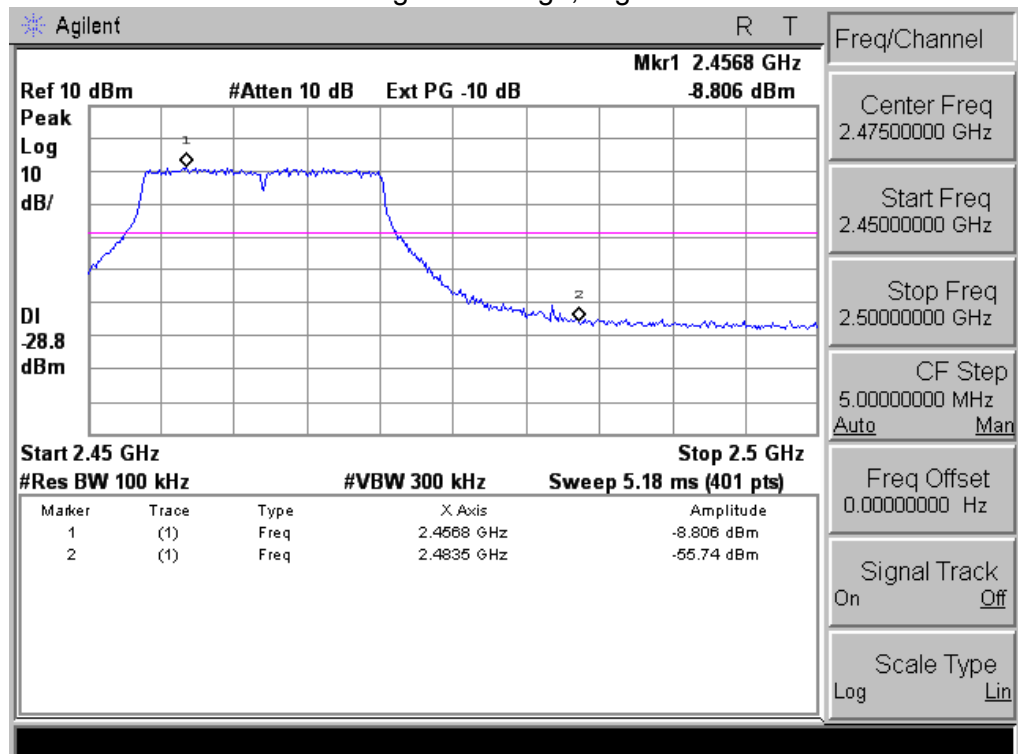

802.11n: Band Edge, Left Side

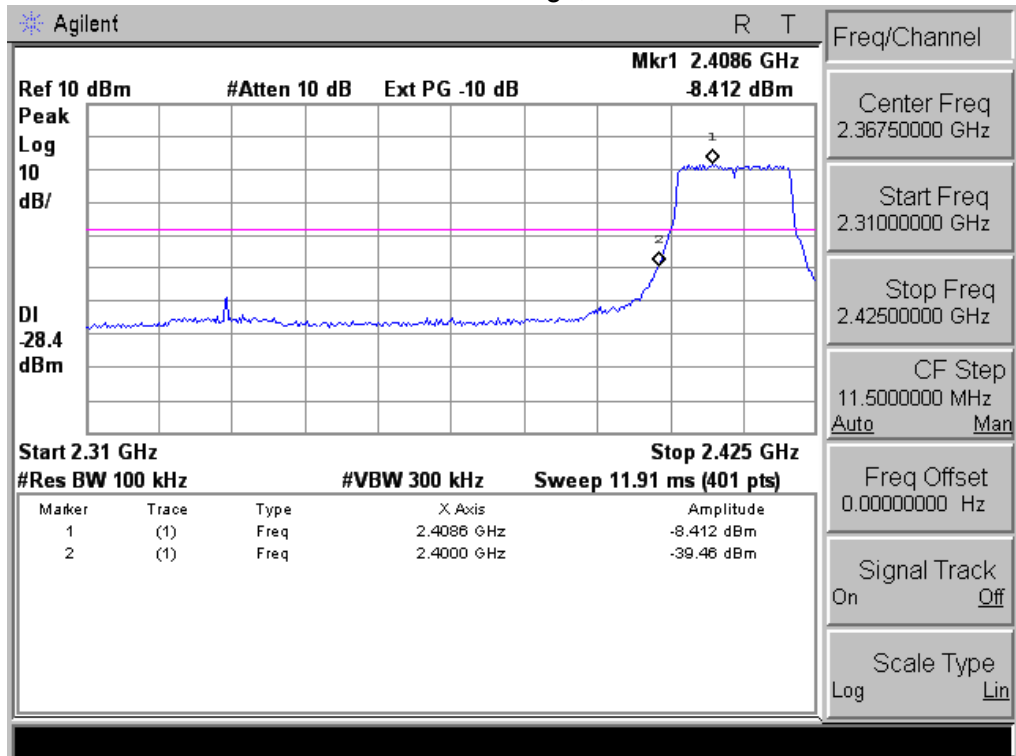

802.11n: Band Edge, Right Side

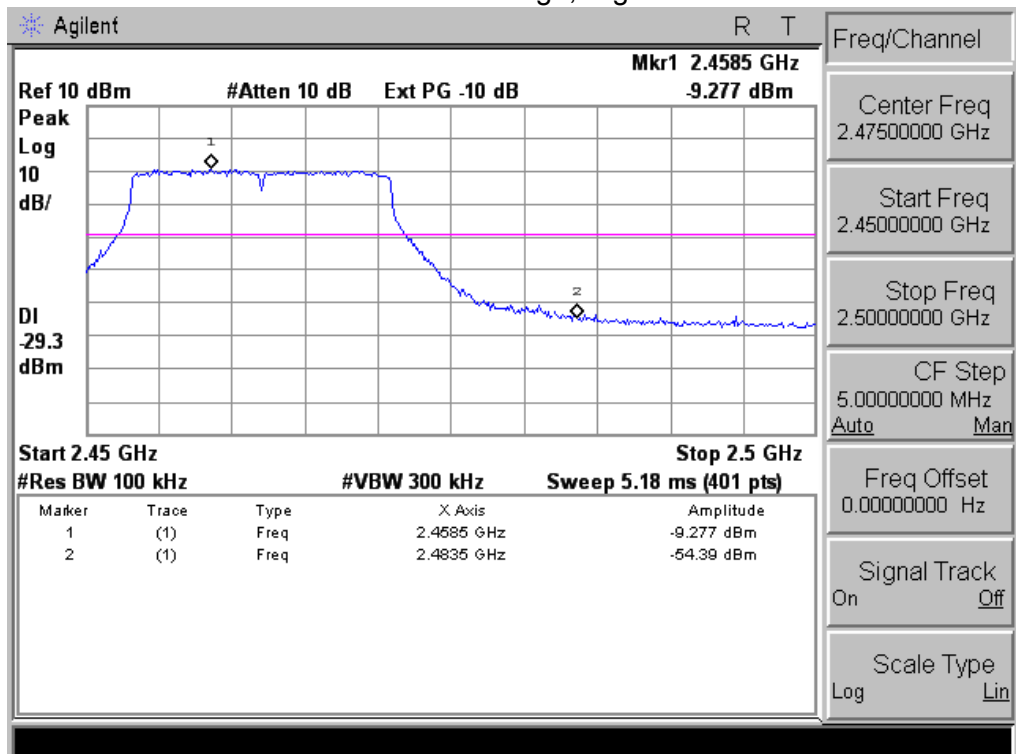

8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT



15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is Integrated(FPCB) antenna. It comply with the standard requirement.

9. EUT TEST PHOTO

Radiated Measurement Photos

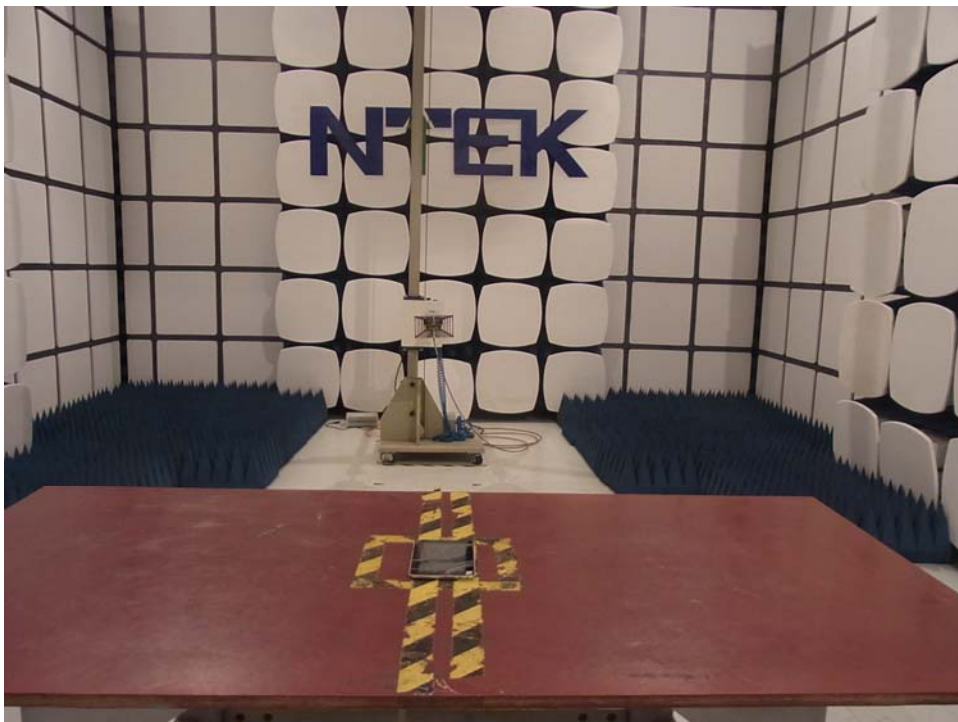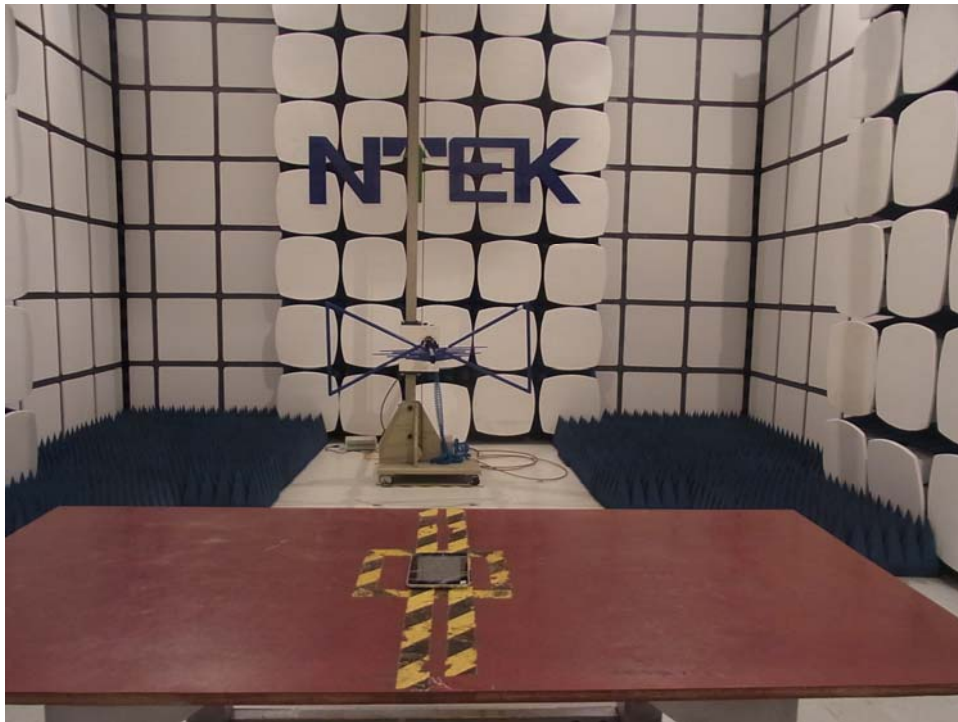

Conducted Measurement Photos

