

C-1376



00-034



3000 Bristol Circle,
Oakville, Ontario,
Canada L6H 6G4

Tel.: (905) 829-1570
Fax.: (905) 829-8050

Website: www.ultratech-labs.com
Email: vic@ultratech-labs.com

Sep. 17, 2003

TIMCO ENGINEERING INC.

P O BOX 370
849 N.W. STATE ROAD 45
NEWBERRY, FLORIDA
USA 32669

Subject: FCC Class II Permissive Change Authorization Application under FCC PART 15, Subpart C, Sec. 15.247 - Intentional Radiators operating in the frequency band 5.735 - 5.815 GHz.

Product: AN-50 SYSTEM
Model No.: AN50S
FCC ID: QC8-AN50S

Dear Sir/Madam

As appointed agent for REDLINE COMMUNICATIONS INC., we would like to submit the application to FCC for Class II Permissive Change Authorization of the above product to include the following 6 additional antennas:

1. Radiowaves Model No.: SP4-5.2 (34.8 dBi 4 foot parabolic antenna). The transmitter radiated emissions tests will be performed with this antenna since it is higher gain its family antennas listed with FCC.
2. Radiowaves Model No.: SEC-55V-60-17 (17 dBi directional antenna). The transmitter radiated emissions tests will be performed with this antenna since it is higher gain its family antennas listed with FCC.
3. Radiowaves Model No.: SEC-55V-90-16 (16 dBi directional antenna). Re-tests are not required on this antenna since its gain is less than that was tested in the original application.
4. MTI Model No.: 484027 (directional 14dBi). Re-tests are not required on this antenna since its gain is less than that was tested in the original application.

Please review all necessary files uploaded to TIMCO UPLOAD SITE site for detailed information.

If you have any queries, please do not hesitate to contact us.

Yours truly,

Tri Minh Luu, P. Eng.,
V.P., Engineering

Encl



3000 Bristol Circle,
Oakville, Ontario,
Canada L6H 6G4

Tel.: (905) 829-1570
Fax.: (905) 829-8050

Website: www.ultratech-labs.com
Email: vic@ultratech-labs.com

Sep. 17, 2003

REDLINE COMMUNICATIONS INC.
90 Tiverton Court, Suite 102
Markham, Ontario
Canada, L3R 9V2

Attn.: Mr. Eddie Chiu

Subject: FCC Class II Permissive Change Authorization Application under FCC PART 15, Subpart C, Sec. 15.247 - Intentional Radiators operating in the frequency band 5.735 - 5.815 GHz.

Product: AN-50 SYSTEM

Model No.: AN50S

FCC ID: QC8-AN50S

Dear Mr. Chiu,

Enclosed you will find the engineering report with 6 additional antennas. If you have any queries, please do not hesitate to contact us.

Yours truly,

A handwritten signature in blue ink is written over a circular professional seal. The seal is red and contains the text "LICENSED PROFESSIONAL ENGINEER" around the top edge, "T.M. LUU" in the center, and "PROVINCE OF ONTARIO" around the bottom edge.

Tri Minh Luu, P. Eng.,
V.P., Engineering

Encl

ENGINEERING TEST REPORT



AN-50 SYSTEM
Model No.: AN50S

FCC ID: QC8-AN50S

Applicant: **REDLINE COMMUNICATIONS INC.**
90 Tiverton Court, Suite 102
Markham, Ontario
Canada, L3R 9V2

In Accordance With

FEDERAL COMMUNICATIONS COMMISSION (FCC)
PART 15, SUBPART C, SEC. 15.247
Intentional Radiators
operating in: 5.735 - 5.815 GHz

UltraTech's File No.: RCI-036-FCC15C

This Test report is Issued under the Authority of
Tri M. Luu, Professional Engineer,
Vice President of Engineering
UltraTech Group of Labs

Date: Sep. 16, 2002



Report Prepared by: Tri M. Luu

Tested by: Hung Trinh, RFI Technician

Issued Date: Sep. 17, 2003

Test Dates: July 01-July 25, 2003, 2003

- *The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.*
- *This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4
Tel.: (905) 829-1570 Fax.: (905) 829-8050

Website: www.ultratech-labs.com Email: vic@ultratech-labs.com Email: tri.luu@sympatico.ca



31040/SIT



C-1376



46390-2049



200093-0



00-034



TABLE OF CONTENTS

EXHIBIT 1. INTRODUCTION	4
1.1. SCOPE	4
1.2. NORMATIVE REFERENCES	4
EXHIBIT 2. PERFORMANCE ASSESSMENT	5
2.1. CLIENT INFORMATION	5
2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION	5
2.3. EUT'S TECHNICAL SPECIFICATIONS	6
2.4. LIST OF EUT'S PORTS	9
2.5. ANCILLARY EQUIPMENT	9
2.6. BLOCK DIAGRAM OF TEST SETUP.....	10
EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS.....	11
3.1. CLIMATE TEST CONDITIONS.....	11
3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS	11
EXHIBIT 4. SUMMARY OF TEST RESULTS.....	12
4.1. LOCATION OF TESTS.....	12
4.2. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES	12
4.3. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS.....	13
EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS	14
5.1. TEST PROCEDURES.....	14
5.2. MEASUREMENT UNCERTAINTIES	14
5.3. MEASUREMENT EQUIPMENT USED:.....	14
5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER:.....	14
5.5. COMPLIANCE WITH FCC PART 15 – GENERAL TECHNICAL REQUIREMENTS	15
5.6. PEAK OUTPUT POWER (CONDUCTED) @ FCC 15.247(B)	16
5.6.1. <i>Limits</i>	16
5.6.2. <i>Method of Measurements & Test Arrangement</i>	16
5.6.3. <i>Test Equipment List</i>	16
5.6.4. <i>Test Data</i>	17
5.7. RF EXPOSURE REQUIRMENTS @ FCC 15.247(B)(4), 1.1310 & 2.1091	19
5.7.1. <i>Limits</i>	19
5.7.2. <i>Method of Measurements</i>	19
5.7.3. <i>Test Data</i>	21
5.8. TRANSMITTER BAND-EDGE & SPURIOUS RADIATED EMISSIONS @ 3 METERS, FCC CFR 47, PARA. 15.247(C), 15.209 & 15.205.....	22
5.8.1. <i>Limits</i>	22
5.8.2. <i>Method of Measurements</i>	23
5.8.3. <i>Test Arrangement</i>	23
5.8.4. <i>Test Equipment List</i>	23
5.8.5. <i>Plots</i>	23
5.8.6. <i>Photographs of Test Setup</i>	23
5.8.7. <i>Test Data</i>	24

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

EXHIBIT 6. MEASUREMENT UNCERTAINTY 41

6.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY 41

EXHIBIT 7. MEASUREMENT METHODS..... 42

7.1. GENERAL TEST CONDITIONS 42

7.1.1. Normal temperature and humidity 42

7.1.2. Normal power source 42

7.1.3. Operating Condition of Equipment under Test 42

7.2. PEAK CONDUCTED TRANSMIT POWER..... 43

7.3. SPURIOUS EMISSIONS (CONDUCTED & RADIATED)..... 44

7.3.1. Band-edge and Spurious Emissions (Conducted) 44

7.3.2. Spurious Emissions (Radiated)..... 44

EXHIBIT 1. INTRODUCTION

1.1. SCOPE

Reference:	FCC Part 15, Subpart C, Sec. 15.247 - Intentional Radiators
Title	Telecommunication - Code of Federal Regulations, CFR 47, Part 15, Subpart C, Sec. 15.247
Purpose of Test:	This report is covered test results for Certification compliance with FCC regulations for NEW TECHNOLOGY DIGITAL MODULATION devices operating in the 5.735 - 5.815 GHz band.
Test Procedures	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
Environmental Classification:	• Light-industry, Commercial • Industry
Grant Note:	The power is conducted. This device requires professional installation with specified antennas and output power levels certified under this Grant for Point-to-Point and Point-to-Multipoint operations. The antenna(s) used for this transmitter must be fixed-mounted on outdoor permanent structures with a separation distance of at least 3.1 meters from all persons during normal operation. Users and installers must be provided with antenna installation instructions and transmitter operating conditions for satisfying RF exposure compliance.

1.2. NORMATIVE REFERENCES

Publication	YEAR	Title
FCC CFR Parts 0-19	2002	Code of Federal Regulations – Telecommunication
ANSI C63.4	1992	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
CISPR 22 & EN 55022	1997 1998	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
CISPR 16-1		Specification for Radio Disturbance and Immunity measuring apparatus and methods

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1. CLIENT INFORMATION

APPLICANT:	
Name:	REDLINE COMMUNICATIONS INC.
Address:	90 Tiverton Court, Suite 102 Markham, Ontario Canada, L3R 9V2
Contact Person:	Mr. Eddie Chiu Phone #: 905-479-8344 (x239) Fax #: 905-479-7432 Email Address: echiu@redlinecommunications.com

MANUFACTURER:	
Name:	REDLINE COMMUNICATIONS
Address:	90 Tiverton Court, Suite 102 Markham, Ontario Canada, L3R 9V2
Contact Person:	Mr. Eddie Chiu Phone #: 905-479-8344 (x239) Fax #: 905-479-7432 Email Address: echiu@redlinecommunications.com

2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

Brand Name	REDLINE COMMUNICATIONS INC.
Product Name	AN-50 SYSTEM
Model Name or Number	AN50S
Serial Number	Preproduction
Type of Equipment	New Technology Digital Modulation Device.
Input Power Supply Type	AC Mains
Primary User Functions of EUT:	Fixed, Point to Multipoint and Point to Point application wireless access. Please refer to attached Technical Description for details.

2.3. EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER	
Equipment Type:	▪ Base station (fixed , point to Multipoint and Point to Point)
Intended Operating Environment:	▪ Commercial, light industry & heavy industry
Power Supply Requirement:	120V 60Hz
RF Peak Conducted Power Rating: <i>Note: Please refer to the following Table for Power Ratings versus Antenna Gain</i>	- Minimum: -18.6 dBm (0.014 mWatts) for all different antennas and applications - Maximum for Point to Multipoint: +21.3 dBm (135 mwatts) varied with different antennas. - Maximum for Point to Point:: +26.0 dBm (398 mwatts) varied with different antennas.
RF Peak EIRP Ratings: <i>Note: Please refer to the following Table for Power Ratings versus Antenna Gain</i>	- Maximum for Point to Multipoint: 3.7 Watts. - Maximum for Point to Point:: 524.8 Watts. Please refer to the following summary of RF Conducted Power and EIRP for detailed information.
Operating Frequency Range:	5.735-5.815 GHz
RF Output Impedance:	50 Ohms
Total number of Channels:	9
Channel Spacing:	10 MHz
Duty Cycle:	Continuous (as worst case)
6 dB Bandwidth:	15.5 MHz max.
Modulation Type (Maximum Data Rate):	64 QAM (54 Mb/s maximum) 16 QAM (36 Mb/s maximum) - QPSK (18 Mb/s maximum) - BPSK (9 Mb/s maximum)
Environmental Temperature:	- Indoor Unit: 0°C to +55°C - Outdoor Unit: -40°C to +60°C
Antenna Connector Type:	Standard TNC connector (transmitter side) and N connector (antenna side). Professional Installation is required by the manufacturer. Please refer to the User's manual for detailed instruction of antenna installation and RF Exposure Warning.
Antenna Description:	Please refer to the table below for available antennas provide for this EUT. This equipment and its antenna are required to be professionally installed by the manufacturer or its subcontracted professional installer.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

Summary of Maximum RF Conducted Output Power and EIRP wrt. Antenna

Power Ratings and Antennas for point to multipoint application

Supplier's Antenna Part Number	Redline's Part Number	Antenna Gain (dBi)	Antenna Type	Maker	Minimum Conducted Power (dBm)	Max Conducted Power Ratings (dBm)	Max EIRP (dBm)
484027	48-00017	14.0	Directional	MTI Wireless Edge	-20	22.0	36.0
484025	48-00025	14.0	Omni-directional	MTI Wireless Edge	-20	22.0	36.0
484026	48-00014	15.0	Omni-directional	MTI Wireless Edge	-20	21.0	36.0
485024	48-00041	21.0	Directional	MTI Wireless Edge	-20	15.0	36.0
485002	48-00020	23.0	Directional	MTI Wireless Edge	-20	13.0	36.0
486001	48-00006	28.0	Directional	MTI Wireless Edge	-20	8.0	36.0
SEC-55V-60-17	48-00028	17.0	Directional	Radiowaves	-20	19.0	36.0
SEC-55V-90-16	48-00029	16.0	Directional	Radiowaves	-20	20.0	36.0
SP1-5.2NS	48-00030	22.5	Directional	Radiowaves	-20	13.5	36.0
SP2-5.2NS	48-00031	29.0	Directional	Radiowaves	-20	7.0	36.0
SP3-5.2NS	48-00032	31.2	Directional	Radiowaves	-20	4.8	36.0
SP4-5.2NS	48-00033	34.8	Directional	Radiowaves	-20	1.2	36.0
MPR58029PTNF	48-00040	29.0	Directional	MaxRad	-20	7.0	36.0
MPR58031PTNF	48-00039	31.0	Directional	MaxRad	-20	5.0	36.0

Notes:

- (1) The RF output power and selected shall be professionally programmed and installed by the manufacturer or its trained professional installer for compliance with FCC Requirements of maximum EIRP of 36 dBm.
- (2) The shaded boxes show additional antennas added to the existing FCC TCB Grant, and the others are currently listed with FCC.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

Power Ratings and Antennas for point to point application

Supplier's Antenna Part Number	Redline's Part Number	Antenna Gain (dBi)	Antenna Type	Maker	Minimum Conducted Power (dBm)	Max Conducted Power Ratings (dBm)	Max EIRP (dBm)
485024	48-00041	21.0	Directional	MTI Wireless Edge	-20	26.03	47.0
485002	48-00020	23.0	Directional	MTI Wireless Edge	-20	26.03	54.0
486001	48-00006	28.0	Directional	MTI Wireless Edge	-20	26.03	49.0
SP1-5.2NS	48-00030	22.5	Directional	Radiowaves	-20	26.03	48.5
SP2-5.2NS	48-00031	29.0	Directional	Radiowaves	-20	26.03	55.0
SP3-5.2NS	48-00032	31.2	Directional	Radiowaves	-20	26.03	57.2
SP4-5.2NS	48-00033	34.8	Directional	Radiowaves	-20	26.03	60.8
MPR58029PTNF	48-00040	29.0	Directional	MaxRad	-20	26.03	55.0
MPR58031PTNF	48-00039	31.0	Directional	MaxRad	-20	26.03	57.0

Notes:

- (1) The RF output power and selected shall be professionally programmed and installed by the manufacturer or its trained professional installer for compliance with FCC Requirements of maximum EIRP of specified by the manufacturer.
- (2) The shaded boxes show additional antennas added to the existing FCC TCB Grant, and the others are currently listed with FCC.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

2.4. LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
1	Serial Port	1	DB9	Shielded
2	IF Out Port	1	F	Shielded
3	Sync Out Port	1	BNC	Shielded
4	Sync In Port	1	BNC	Shielded
5	Ethernet Port	1	RJ-45	Non-shielded
6	RF input/output port	1	TNC (female)	Shielded

2.5. ANCILLARY EQUIPMENT

The EUT was tested while connected to the following representative configuration of ancillary equipment necessary to exercise the ports during tests:

Ancillary Equipment # 1	
Description:	ThinkPad Laptop
Brand name:	IBM
Model Name or Number:	2625
FCC ID:	ANOKAJIPENCP
Serial Number:	78-WWM4A
Connected to EUT's Port:	RS-232
Notes:	This laptop computer is used for technical services only; therefore, and it is used for control purpose only but not for testing.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376


46390-2049

200093-0

00-034

2.6. BLOCK DIAGRAM OF TEST SETUP

The equipment under test is arranged as intended set up for normal operation. The Indoor AN50S Unit is located indoor and connect to the Outdoor AN50S (transmitter) Unit using a minimum 100 foot, F-type shielded cable. The Outdoor AN50S (Transmitter) is mounted on the antenna and its RF output port is connected to the antenna using a short TNC-to-N cable.

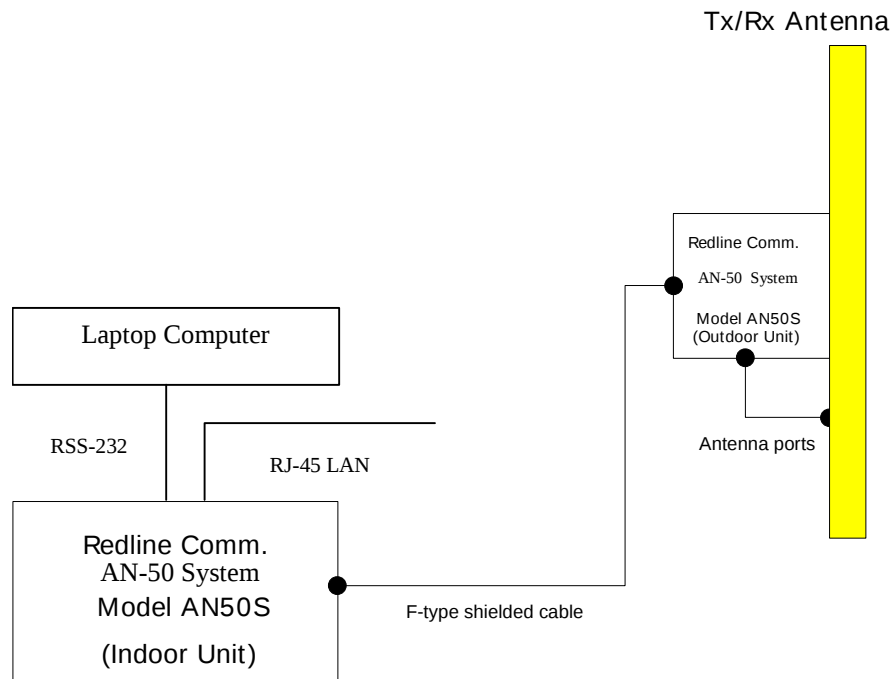

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C
Humidity:	51%
Pressure:	102 kPa
Power input source:	120V 60Hz

3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS

Operating Modes:	Each channel from the transmitter is tested for worst case emissions since the maximum power rating of each channel is different. The transmitter is transmitted continuously in a test mode configuration for worst case and convenience of measurements
Special Test Software:	Special software is provided by the Applicant to select and operate the EUT at each channel frequency continuously.
Special Hardware Used:	N/A
Transmitter Test Antenna:	The EUT is tested with the antenna fitted in a manner typical of normal intended use as a non-integral antenna equipment. The professional installation is required field installation and operation

Transmitter Test Signals:	
Frequencies: 5.735-5.815 GHz	All channel swill be tested since they have different maximum output power ratings.
Transmitter Wanted Output Test Signals: - RF Power Output: - Normal Test Modulation - Modulating signal source:	- Please refer to test data for details of rf output power with respect to antenna gain 64QAM, 16QAM, QPSK & BPSK - Internal

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

EXHIBIT 4. SUMMARY OF TEST RESULTS

4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Powerline Conducted Emissions were performed in UltraTech's shielded room, 16'(L) by 12'(W) by 12'(H).
- Radiated Emissions were performed at the Ultratech's 3 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario.

The above sites have been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville Open Field Test Site has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049). Last Date of Site Calibration: Aug. 10, 2002.

4.2. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT



C-1376



46390-2049



200093-0



00-034



4.3. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC PARAGRAPH.	TEST REQUIREMENTS	COMPLIANCE (YES/NO)
15.107 & 15.207	Class B - AC Power Conducted Emissions on Tx, Rx and standby modes	Not required to be re-tested.
15.247(a)(2)	6dB Bandwidth of a Digital Modulation System	Not required to be re-tested.
15.247(b) & 1.1310	Maximum Peak Power (Conducted)	Yes
1.1307, 1.1310, 2.1091 & 2.1093	RF Exposure Limit	Yes
15.247(c)	Transmitter Band-edge and RF Conducted Spurious Emissions measured at the Transmitter Antenna Terminal	Not required to be re-tested.
15.247(d)	Transmitted Power Density of a Digital Modulation System	Not required to be re-tested.
15.247(c), 15.209 & 15.205	Transmitter Band-edge and Radiated Emissions @ 3m	Yes
15.109(b)	Class A - Radiated Emissions from Unintentional Radiators	Not required to be re-tested.

Notes:

1. Radiowaves Model No.: SP4-5.2 (34.8 dBi 4 foot parabolic antenna). The transmitter radiated emissions tests will be performed with this antenna since it is higher gain its family antennas listed with FCC.
2. Radiowaves Model No.: SEC-55V-60-17 (17 dBi directional antenna). The transmitter radiated emissions tests will be performed with this antenna since it is higher gain its family antennas listed with FCC.
3. Radiowaves Model No.: SEC-55V-90-16 (16 dBi directional antenna). Re-tests are not required on this antenna since its gain is less than that was tested in the original application.
4. MTI Model No.: 484027 (directional 14dBi). Re-tests are not required on this antenna since its gain is less than that was tested in the original application.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

5.1. TEST PROCEDURES

This section contains test results only. Details of test methods and procedures can be found in Exhibit 7 of this report and ANSI C63-4:1992

5.2. MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document NIS 81 with a confidence level of 95%. Please refer to Exhibit 7 for Measurement Uncertainties.

5.3. MEASUREMENT EQUIPMENT USED:

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C64-3:1992, FCC 15.247 and CISPR 16-1.

5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER:

The essential function of the EUT is to correctly communicate data to and from radios over RF link.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT



C-1376



46390-2049



200093-0



00-034



5.5. COMPLIANCE WITH FCC PART 15 – GENERAL TECHNICAL REQUIREMENTS

FCC Section	FCC Rules	
15.203	Described how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT. The exception is in those cases where EUT must be professionally installed. In order to demonstrate that professional installation is required, the following 3 points must be addressed: • The application (or intended use) of the EUT • The installation requirements of the EUT • The method by which the EUT will be marketed	Model AN50S's rf input/output port is is a TNC (female) standard connector and it is required Professional installation.
15.204	Provided the information for every antenna proposed for use with the EUT: (a) type (e.g. Yagi, patch, grid, dish, etc...), (b) manufacturer and model number (c) gain with reference to an isotropic radiator	Please refer to Sec. 3.4 of this test report for a list of antennas' specification

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

5.6. PEAK OUTPUT POWER (CONDUCTED) @ FCC 15.247(B)

5.6.1. Limits

- **FCC 15.247(b)(1):** Maximum peak output power of the transmitter shall not exceed 1 Watt.
- **FCC 15.247(b)(3)(ii):** Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.
- **FCC 15.247(b)(3)(iii):** Fixed, point-to-point operation, as used in paragraphs (b)(3)(i) and (b)(3)(ii) of this section, excludes the use of point-to- multipoint systems, omnidirectional applications, and multiple co- located intentional radiators transmitting the same information. The operator of the New Technology Digital Modulation intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility

5.6.2. Method of Measurements & Test Arrangement

Refer to Exhibit 7, Sec. 7.2 of this test report, FCC 15.247(b)(1)&(3), ANSI C63-4:1992 & ETSI 300 328

Note: The conducted peak power measurement method was performed in accordance with ETSI 300 328 since it was proven to be independent with the peak power meter characteristics.

5.6.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Hewlett Packard	HP 8593EM	3412A00103	9 kHz – 26.5 GHz
Microwave Amplifier	Hewlett Packard	HP 83017A		1 GHz to 26.5 GHz
67297 RF Detector (Diode Detector)	Herotex	DZ122-553	63400	..
Storage Oscilloscope	Philips	PM3320A	ST9907959	--

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

5.6.4. Test Data

Summary of Maximum RF Conducted Output Power and EIRP wrt. Antenna

Power Ratings and Antennas for point to multipoint application

Supplier's Antenna Part Number	Redline's Part Number	Antenna Gain (dBi)	Antenna Type	Maker	Minimum Conducted Power (dBm)	Max Conducted Power Ratings (dBm)	Max EIRP (dBm)
484027	48-00017	14.0	Directional	MTI Wireless Edge	-20	22.0	36.0
484025	48-00025	14.0	Omni-directional	MTI Wireless Edge	-20	22.0	36.0
484026	48-00014	15.0	Omni-directional	MTI Wireless Edge	-20	21.0	36.0
485024	48-00041	21.0	Directional	MTI Wireless Edge	-20	15.0	36.0
485002	48-00020	23.0	Directional	MTI Wireless Edge	-20	13.0	36.0
486001	48-00006	28.0	Directional	MTI Wireless Edge	-20	8.0	36.0
SEC-55V-60-17	48-00028	17.0	Directional	Radiowaves	-20	19.0	36.0
SEC-55V-90-16	48-00029	16.0	Directional	Radiowaves	-20	20.0	36.0
SP1-5.2NS	48-00030	22.5	Directional	Radiowaves	-20	13.5	36.0
SP2-5.2NS	48-00031	29.0	Directional	Radiowaves	-20	7.0	36.0
SP3-5.2NS	48-00032	31.2	Directional	Radiowaves	-20	4.8	36.0
SP4-5.2NS	48-00033	34.8	Directional	Radiowaves	-20	1.2	36.0
MPR58029PTNF	48-00040	29.0	Directional	MaxRad	-20	7.0	36.0
MPR58031PTNF	48-00039	31.0	Directional	MaxRad	-20	5.0	36.0

Notes:

- (1) The RF output power and selected shall be professionally programmed and installed by the manufacturer or its trained professional installer for compliance with FCC Requirements of maximum EIRP of 36 dBm.
- (2) The shaded boxes show additional antennas added to the existing FCC TCB Grant, and the others are currently listed with FCC. Other antennas have already been certified by FCC in the original certification.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

Power Ratings and Antennas for point to point application

Supplier's Antenna Part Number	Redline's Part Number	Antenna Gain (dBi)	Antenna Type	Maker	Minimum Conducted Power (dBm)	Max Conducted Power Ratings (dBm)	Max EIRP (dBm)
485024	48-00041	21.0	Directional	MTI Wireless Edge	-20	26.03	47.0
485002	48-00020	23.0	Directional	MTI Wireless Edge	-20	26.03	54.0
486001	48-00006	28.0	Directional	MTI Wireless Edge	-20	26.03	49.0
SP1-5.2NS	48-00030	22.5	Directional	Radiowaves	-20	26.03	48.5
SP2-5.2NS	48-00031	29.0	Directional	Radiowaves	-20	26.03	55.0
SP3-5.2NS	48-00032	31.2	Directional	Radiowaves	-20	26.03	57.2
SP4-5.2NS	48-00033	34.8	Directional	Radiowaves	-20	26.03	60.8
MPR58029PTNF	48-00040	29.0	Directional	MaxRad	-20	26.03	55.0
MPR58031PTNF	48-00039	31.0	Directional	MaxRad	-20	26.03	57.0

Notes:

- (1) The RF output power and selected shall be professionally programmed and installed by the manufacturer or its trained professional installer for compliance with FCC Requirements of maximum EIRP of specified by the manufacturer.
- (2) The shaded boxes show additional antennas added to the existing FCC TCB Grant, and the others are currently listed with FCC. Other antennas have already been certified by FCC in the original certification.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

5.7. RF EXPOSURE REQUIREMENTS @ FCC 15.247(B)(4), 1.1310 & 2.1091

5.7.1. Limits

- 15.247(b)(4) NEW TECHNOLOGY DIGITAL MODULATION devices are subject to the radio frequency radiation exposure requirements specified in Sec. 1.1307(b), Sec. 2.1091 and Sec. 2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a "general population/uncontrolled" environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.
- FCC 1.1310:-** The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b).

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (minutes)
(B) Limits for General Population/Uncontrolled Exposure				
1500-100,000	...	...	1.0	30

F = Frequency in MHz

5.7.2. Method of Measurements

Refer to FCC @ 1.1310, 2.1091

- New Technology Digital Modulation transmitters operating under section 15.247 are categorically from routine environmental evaluation to demonstrating RF exposure compliance with respect to MPE and/or SAR limits. These devices are not exempted from compliance (As indicated in Section 15.247(b)(4), these transmitters are required to operate in a manner that ensures that exposure to public users and nearby persons) does not exceed the Commission's RF exposure guidelines (see Section 1.1307 and 2.1093). Unless a device operates at substantially low power levels, with a low gain antenna(s), supporting information is generally needed to establish the various potential operating configurations and exposure conditions of a transmitter and its antenna(s) in order to determine compliance with the RF exposure guidelines.
- In order to demonstrate compliance with MPE requirements (see Section 2.1091), the following information is typically needed:
 - Calculation that estimates the minimum separation distance (20 cm or more) between an antenna and persons required to satisfy power density limits defined for free space.
 - Antenna installation and device operating instructions for installers (professional/unskilled users), and the parties responsible for ensuring compliance with the RF exposure requirement
 - Any caution statements and/or warning labels that are necessary in order to comply with the exposure limits
 - Any other RF exposure related issues that may affect MPE compliance

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

Calculation Method of RF Safety Distance:

$$S = PG/4\pi r^2 = EIRP/4\pi r^2$$

Where: P: power input to the antenna in mW
EIRP: Equivalent (effective) isotropic radiated power.
S: power density mW/cm²
G: numeric gain of antenna relative to isotropic radiator
r: distance to centre of radiation in cm

FCC radio frequency exposure limits may be exceeded at distances closer than r cm from the antenna of this device

$$r = \sqrt{PG/4\pi S}$$

FCC radio frequency exposure limits may not be exceeded at distances closer than r cm from the antenna of this device

- For portable transmitters (see Section 2.1093), or devices designed to operate next to a person's body, compliance is determined with respect to the SAR limit (define in the body tissues) for near-field exposure conditions. If the maximum average output power, operating condition configurations and exposure conditions are comparable to those of existing cellular and PCS phones., an SAR evaluation may be required in order to determine if such a device complies with SAR limit. When SAR evaluation data is not available, and the additional supporting information cannot assure compliance, the Commission may request that a SAR evaluation be performed, as provided for in Section 1.1307(d)

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT



C-1376



46390-2049



200093-0



00-034



5.7.3. Test Data

5.7.3.1. For Point to Multipoint Application

With any antenna, the maximum EIRP is allowed to be 36 dBm or 4 Watts

The minimum separation distance = 17.8 cm

Note 1: RF EXPOSURE DISTANCE LIMITS: $r = (PG/4\pi S)^{1/2} = (EIRP/4\pi S)^{1/2}$
 $S = 1.0 \text{ mW/cm}^2$

5.7.3.2. For Point to Point Application

The maximum antenna gain is 34.8 dBi by using Radiowaves SP4-5-2NS Antenna, which allows the maximum EIRP of 60.8 dBm or 1,202,264.4 mWatts.

The minimum separation distance = 309 cm

Note 1: RF EXPOSURE DISTANCE LIMITS: $r = (PG/4\pi S)^{1/2} = (EIRP/4\pi S)^{1/2}$
 $S = 1.0 \text{ mW/cm}^2$

Evaluation of RF Exposure Compliance Requirements	
RF Exposure Requirements	Compliance with FCC Rules
Minimum calculated separation distance between antenna and persons required: 17.8 centimeters for Point to Point application 3.1 meters for Point to Point application.	Manufacturer' instruction for separation distance between antenna and persons required: 3.1 meters

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

5.8. TRANSMITTER BAND-EDGE & SPURIOUS RADIATED EMISSIONS @ 3 METERS, FCC CFR 47, PARA. 15.247(C), 15.209 & 15.205

5.8.1. Limits

In any 100 kHz bandwidth outside the frequency band in which the New Technology Digital Modulation intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Sec. 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a) (see Sec. 15.205(c)).

Remarks:

- Applies to harmonics/spurious emissions that fall in the restricted bands listed in Section 15.205. The maximum permitted average field strength is listed in Section 15.209.
- @ FCC CFR 47, Para. 15.237(c) - The emission limits as specified above are based on measurement instrument employing an average detector. The provisions in @15.35 for limiting peak emissions apply.

FCC CFR 47, Part 15, Subpart C, Para. 15.205(a) - Restricted Frequency Bands

MHz	MHz	MHz	GHz
0.090 - 0.110	162.0125 - 167.17	2310 - 2390	9.3 - 9.5
0.49 - 0.51	167.72 - 173.2	2483.5 - 2500	10.6 - 12.7
2.1735 - 2.1905	240 - 285	2655 - 2900	13.25 - 13.4
8.362 - 8.366	322 - 335.4	3260 - 3267	14.47 - 14.5
13.36 - 13.41	399.9 - 410	3332 - 3339	14.35 - 16.2
25.5 - 25.67	608 - 614	3345.8 - 3358	17.7 - 21.4
37.5 - 38.25	960 - 1240	3600 - 4400	22.01 - 23.12
73 - 75.4	1300 - 1427	4500 - 5250	23.6 - 24.0
108 - 121.94	1435 - 1626.5	5350 - 5460	31.2 - 31.8
123 - 138	1660 - 1710	7250 - 7750	36.43 - 36.5
149.9 - 150.05	1718.8 - 1722.2	8025 - 8500	Above 38.6
156.7 - 156.9	2200 - 2300	9000 - 9200	

FCC CFR 47, Part 15, Subpart C, Para. 15.209(a)
-- Field Strength Limits within Restricted Frequency Bands --

FREQUENCY (MHz)	FIELD STRENGTH LIMITS (microvolts/m)	DISTANCE (Meters)
0.009 - 0.490	2,400 / F (KHz)	300
0.490 - 1.705	24,000 / F (KHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

5.8.2. Method of Measurements

Refer to Exhibit 7, Sec. 7.3 of this test report and **ANSI 63.4-1992, Para. 8** for detailed radiated emissions measurement procedures.

The following measurement procedures were also applied:

- Applies to harmonics/spurious that fall in the restricted bands listed in Section 15.205. the maximum permitted average field strength is listed in Section 15.209. A Pre-Amp and highpass filter are used for this measurement.
- For measurement below 1 GHz, set RBW = 100 KHz, VBW $\geq$ 100 KHz, SWEEP=AUTO.
- For measurement above 1 GHz, set RBW = 1 MHz, VBW = 1 MHz (Peak) & VBW = 10 Hz (Average), SWEEP=AUTO.
- If the emission is pulsed, modified the unit for continuous operation, then use the settings above for measurements, then correct the reading by subtracting the peak-average correction factor derived from the appropriate duty cycle calculation. See Section 15.35(b) and (c).

5.8.3. Test Arrangement

Please refer to Test Arrangement in Sec. 5.5.3 for details of test setup for emission measurements.

5.8.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Advantest	R3271	15050203	100 Hz to 32 GHz with external mixer for frequency above 32 GHz
Microwave Amplifier	Hewlett Packard	HP 83017A		1 GHz to 26.5 GHz
Biconilog Antenna	EMCO	3143	1029	20 MHz to 2 GHz
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz
Horn Antenna	EMCO	3160-09	..	18 GHz – 26.5 GHz
Horn Antenna	EMCO	3160-10	..	26.5 GHz – 40 GHz
Mixer	Tektronix	118-0098-00	..	18 GHz – 26.5 GHz
Mixer	Tektronix	119-0098-00	..	26.5 GHz – 40 GHz

5.8.5. Plots

The following plots graphically represent the test results recorded in the above Test Data Table.

5.8.6. Photographs of Test Setup

Refer to the Photographs #1 & #6 in Annex 1 for setup and arrangement of equipment under tests and its ancillary equipment.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

5.8.7. Test Data

Notes:

1. Radiowaves Model No.: SP4-5.2 (34.8 dBi 4 foot parabolic antenna). The transmitter radiated emissions tests will be performed with this antenna since it is higher gain its family antennas listed with FCC.
2. Radiowaves Model No.: SEC-55V-60-17 (17 dBi directional antenna). The transmitter radiated emissions tests will be performed with this antenna since it is higher gain its family antennas listed with FCC.
3. Radiowaves Model No.: SEC-55V-90-16 (16 dBi directional antenna). Re-tests are not required on this antenna since its gain is less than that was tested in the original application.
4. MTI Model No.: 484027 (directional 14dBi). Re-tests are not required on this antenna since its gain is less than that was tested in the original application.

*** The maximum power allowed for Point to Point applications will be operated for worst case Transmitter Radiated Emissions.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT



C-1376



46390-2049



200093-0



00-034




5.8.7.1. Band-edge Radiated Emissions at 3 meters


Antenna Manufacturer	Model Number	Max. Gain within Family (dBi)	Max. RF Power (dBm)	Maximum EIRP (dBm)	Plots #
Radiowaves	SP4-5.2	34.8	25.3	60.1	1 – 6
Radiowaves	SEC-55V-60-17	17.0	25.3	42.3	7 to 12

The modulation 64QAM (54 Mb/s) was tested and represent for other modulations since all rf output signal are identical.

Plot # 1: Bandedge Radiated Emissions @ 3 Meters, Vertical Polarization
Channel 1, 5735 MHz, 64 QAM (54 Mb/s) with Radiowaves Antenna, Model: SP4-5.2NS, Serial: 5444

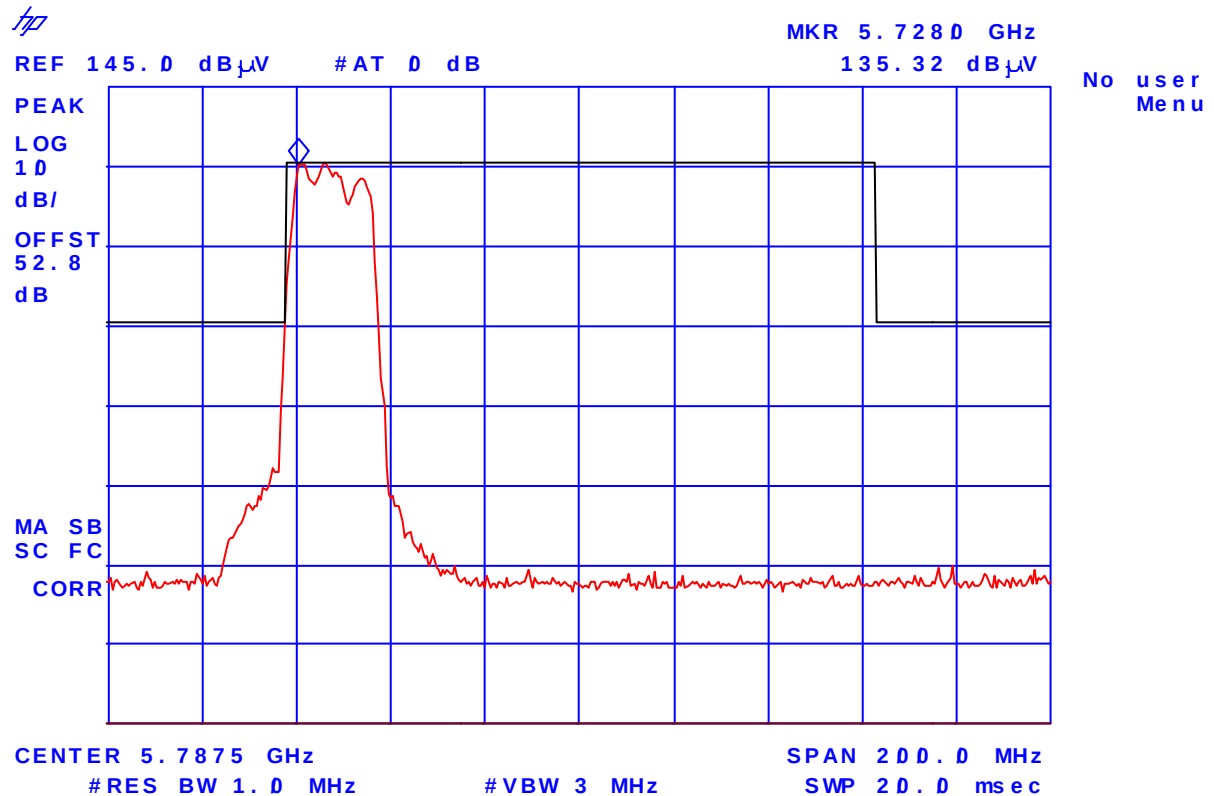

**Plot # 2: Bandedge Radiated Emissions @ 3 Meters, Vertical Polarization
(Zoom in) - Channel 1, 5735 MHz, 64 QAM (54 Mb/s) with Radiowaves Antenna,
Model: SP4-5.2NS, Serial: 5444**

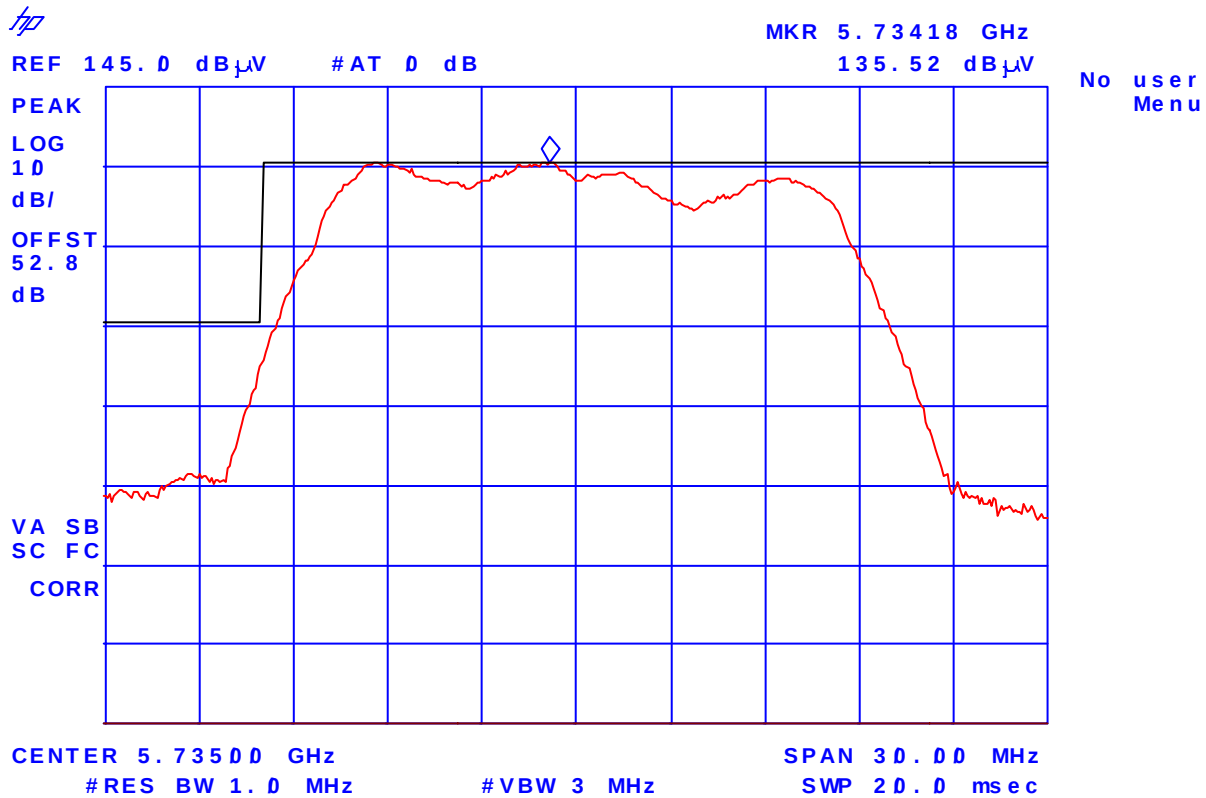

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT


C-1376

46390-2049

200093-0

00-034

Plot # 3: Bandedge Radiated Emissions @ 3 Meters, Horizontal Polarization
Channel 1, 5735 MHz, 64 QAM (54 Mb/s) with Radiowaves Antenna, Model: SP4-5.2NS, Serial: 5444

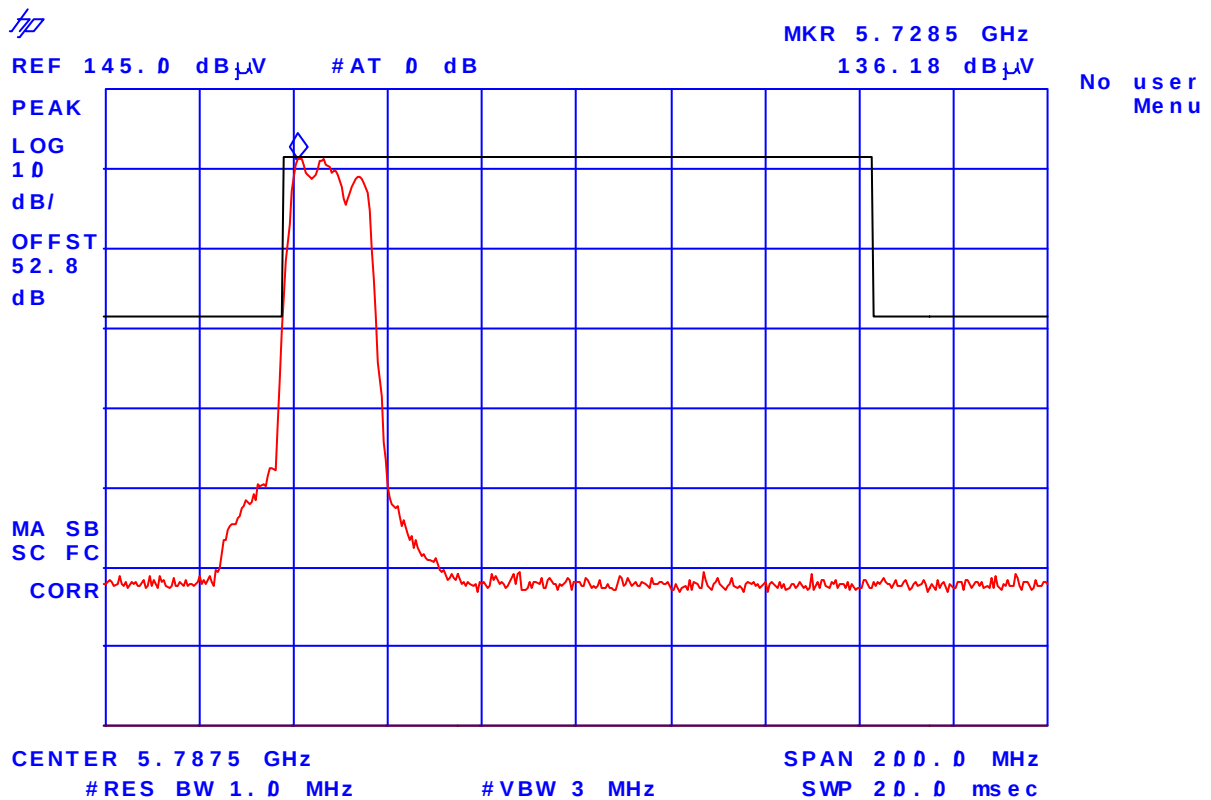

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT


C-1376

46390-2049

200093-0

00-034

**Plot # 4: Bandedge Radiated Emissions @ 3 Meters, Horizontal Polarization
(Zoom in) - Channel 1, 5735 MHz, 64 QAM (54 Mb/s) with Radiowaves Antenna,
Model: SP4-5.2NS, Serial: 5444**

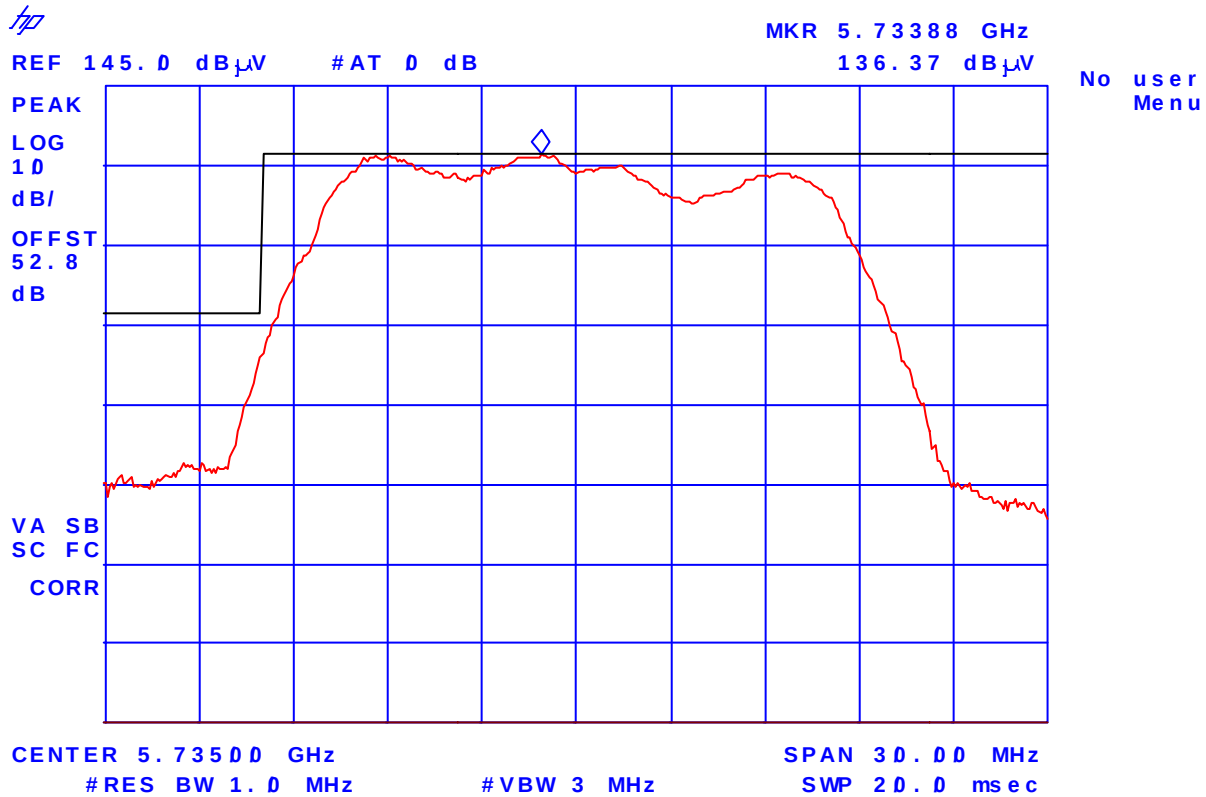

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT


C-1376

46390-2049

200093-0

00-034

Plot # 5: Bandedge Radiated Emissions @ 3 Meters, Vertical Polarization
Channel 5, 5815 MHz, 64 QAM (54 Mb/s) with Radiowaves Antenna, Model: SP4-5.2NS, Serial: 5444

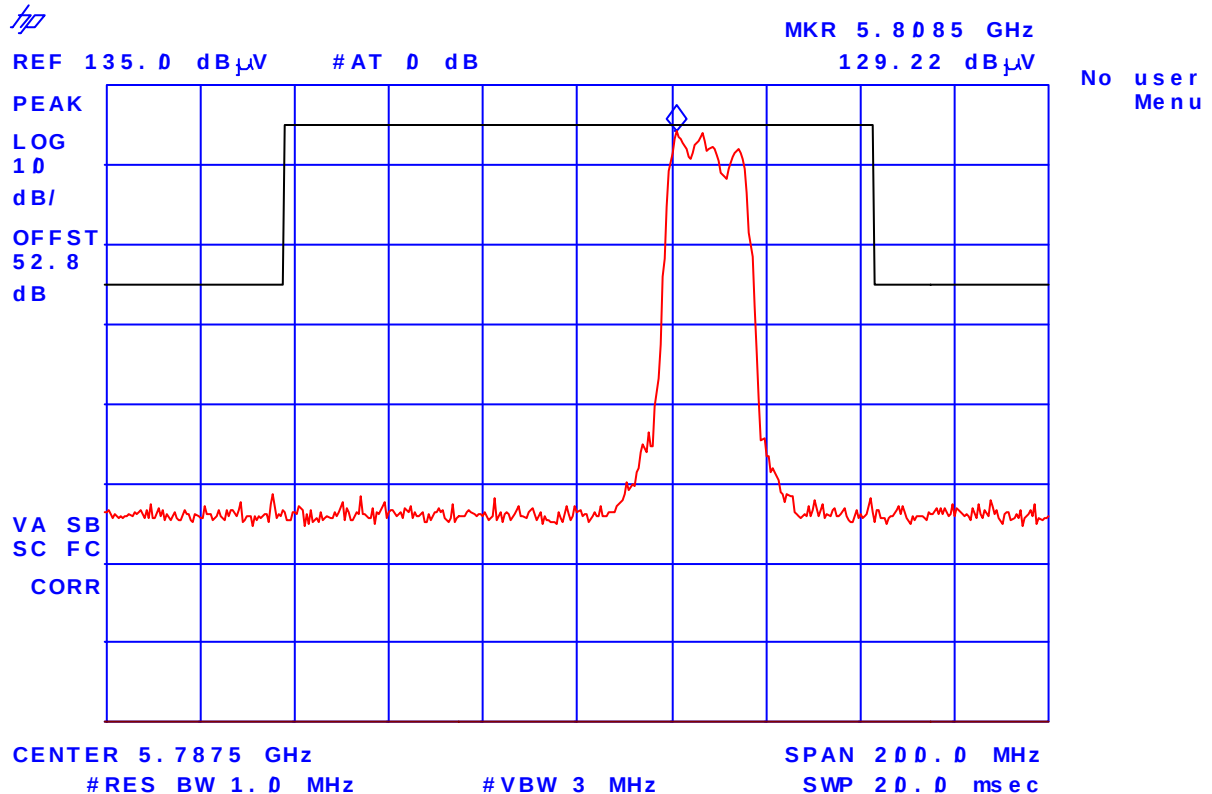

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT


C-1376

46390-2049

200093-0

00-034

Plot # 6: Bandedge Radiated Emissions @ 3 Meters, Horizontal Polarization
Channel 5, 5815 MHz, 64 QAM (54 Mb/s) with Radiowaves Antenna, Model: SP4-5.2NS, Serial: 5444

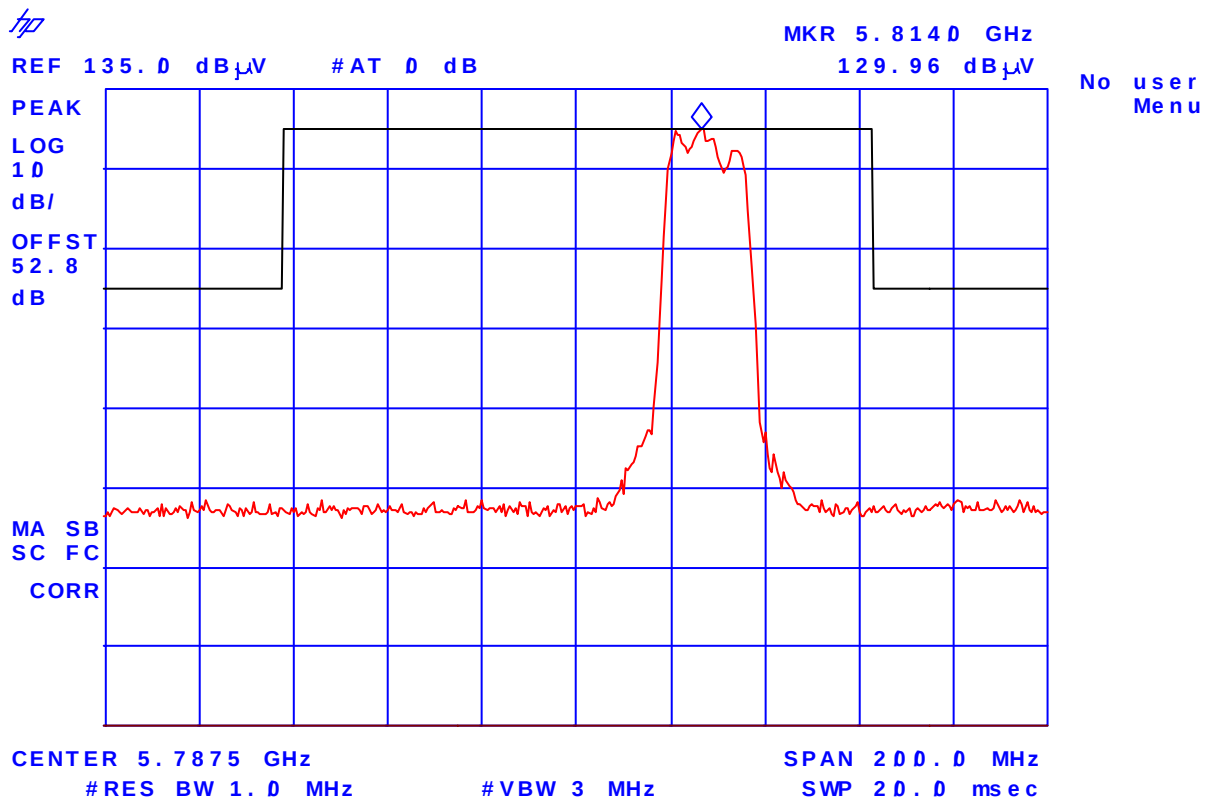

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT


C-1376

46390-2049


200093-0

00-034

Plot # 7: Bandedge Radiated Emissions @ 3 Meters, Vertical Polarization
Channel 1, 5735 MHz, 64 QAM (54 Mb/s) with Radiowaves Antenna, Model: SEC-5.5V-60-17, Serial: 141

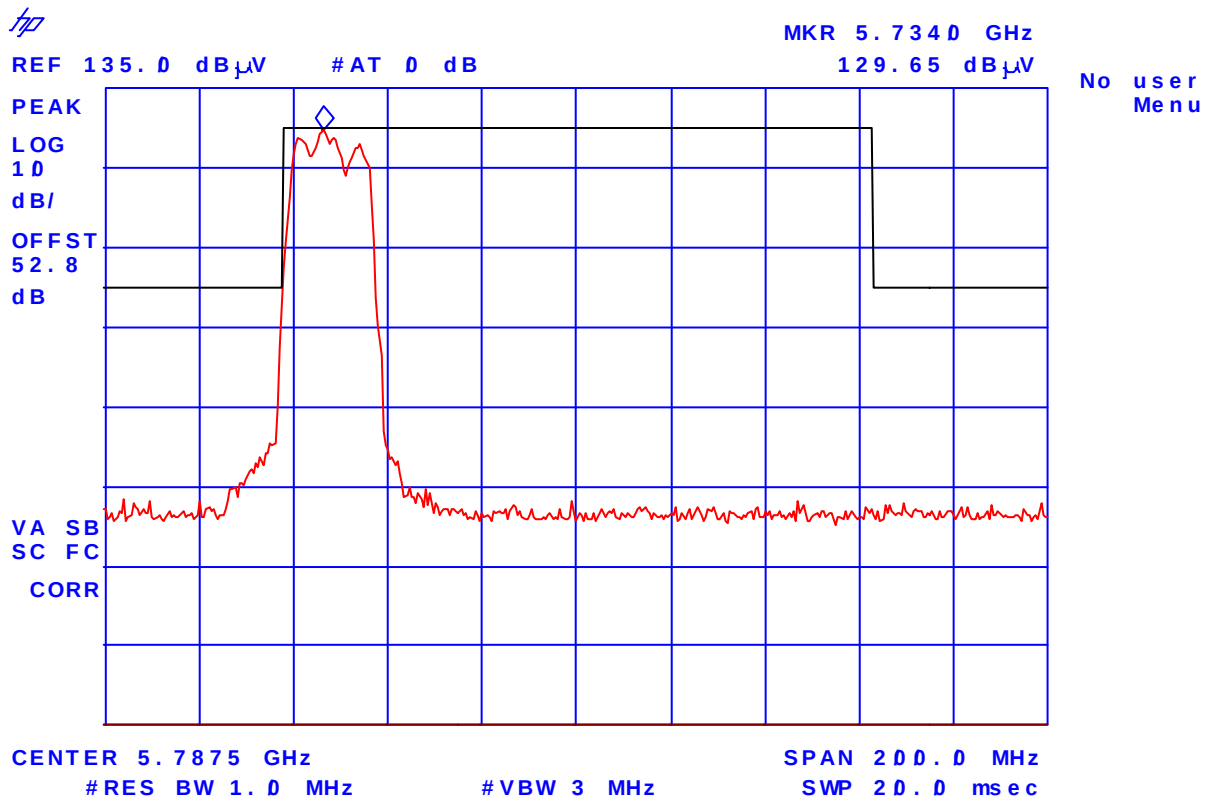

**Plot # 8: Bandedge Radiated Emissions @ 3 Meters, Vertical Polarization
(Zoom in) - Channel 1, 5735 MHz, 64 QAM (54 Mb/s) with Radiowaves Antenna,
Model: SEC-5.5V-60-17, Serial: 141**

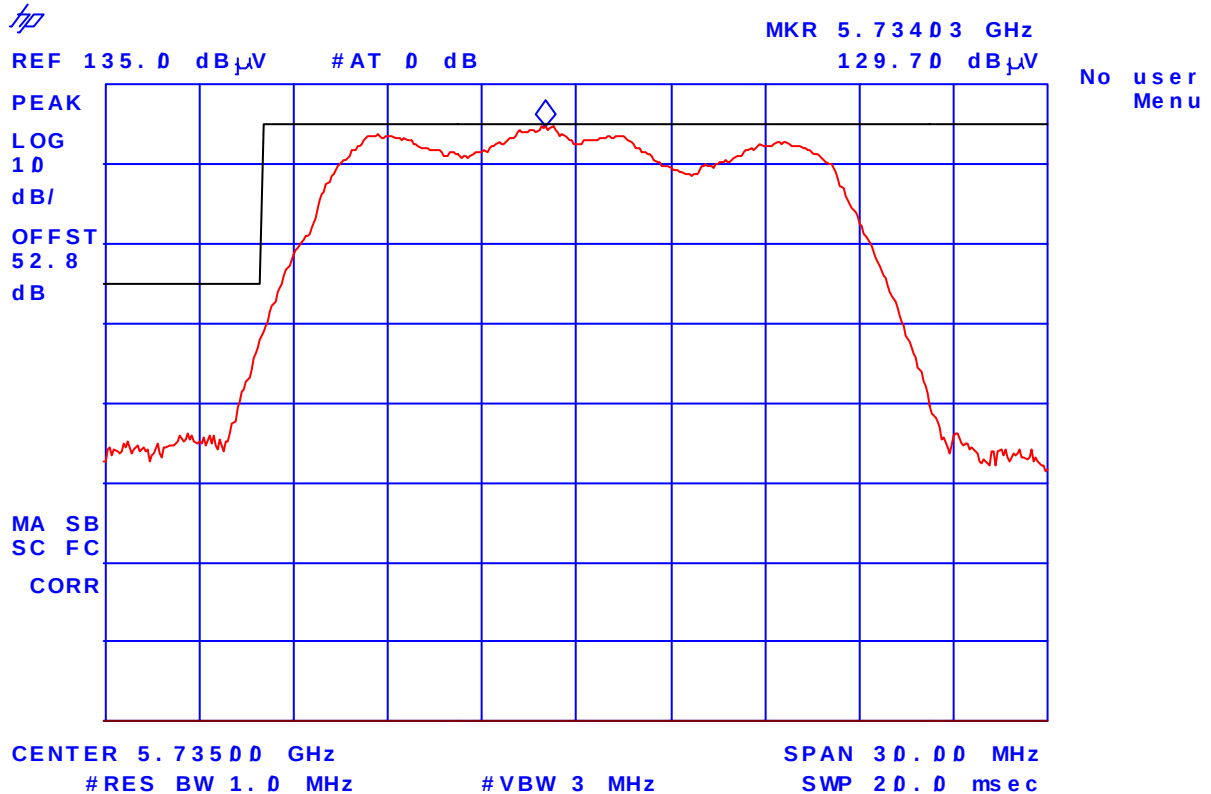

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT


C-1376

46390-2049


200093-0

00-034


Plot # 9: Bandedge Radiated Emissions @ 3 Meters, Horizontal Polarization
Channel 1, 5735 MHz, 64 QAM (54 Mb/s) with Radiowaves Antenna, Model: SEC-5.5V-60-17, Serial: 141

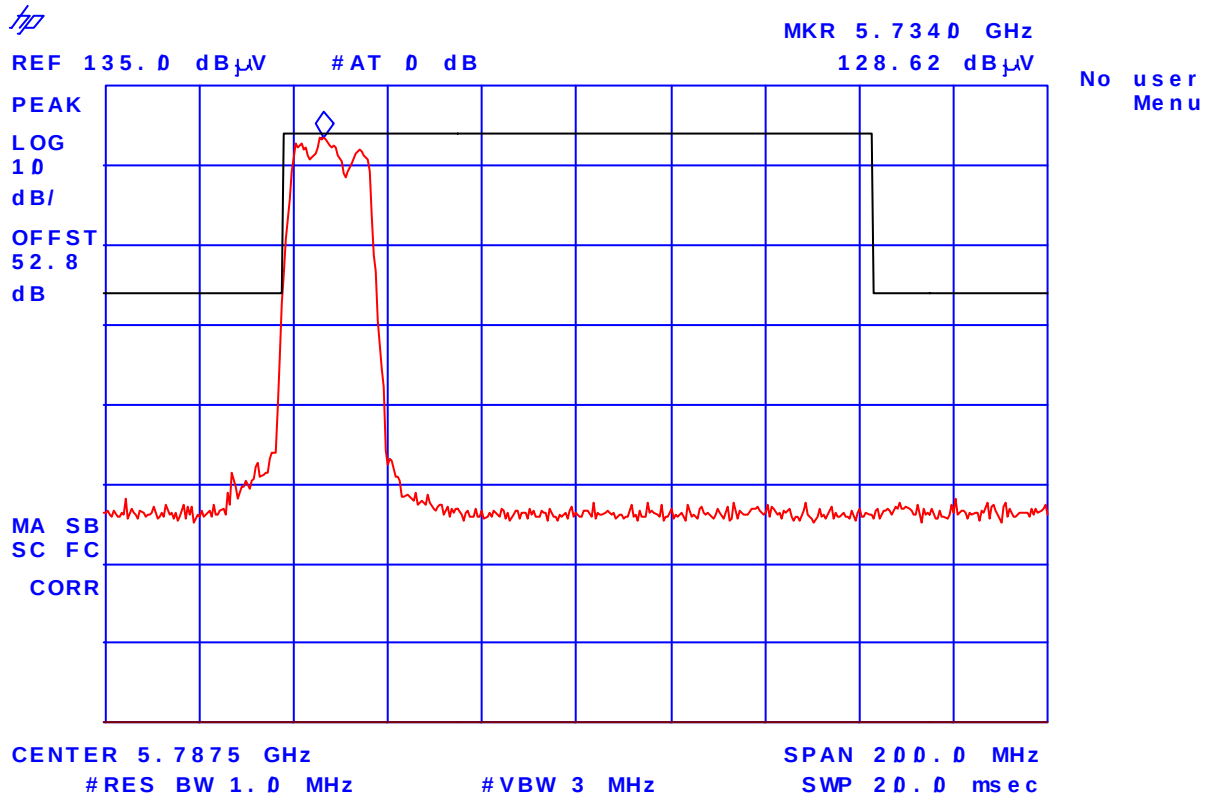

**Plot # 10: Bandedge Radiated Emissions @ 3 Meters, Horizontal Polarization
(Zoom in) - Channel 1, 5735 MHz, 64 QAM (54 Mb/s) with Radiowaves Antenna,
Model: SEC-5.5V-60-17, Serial: 141**

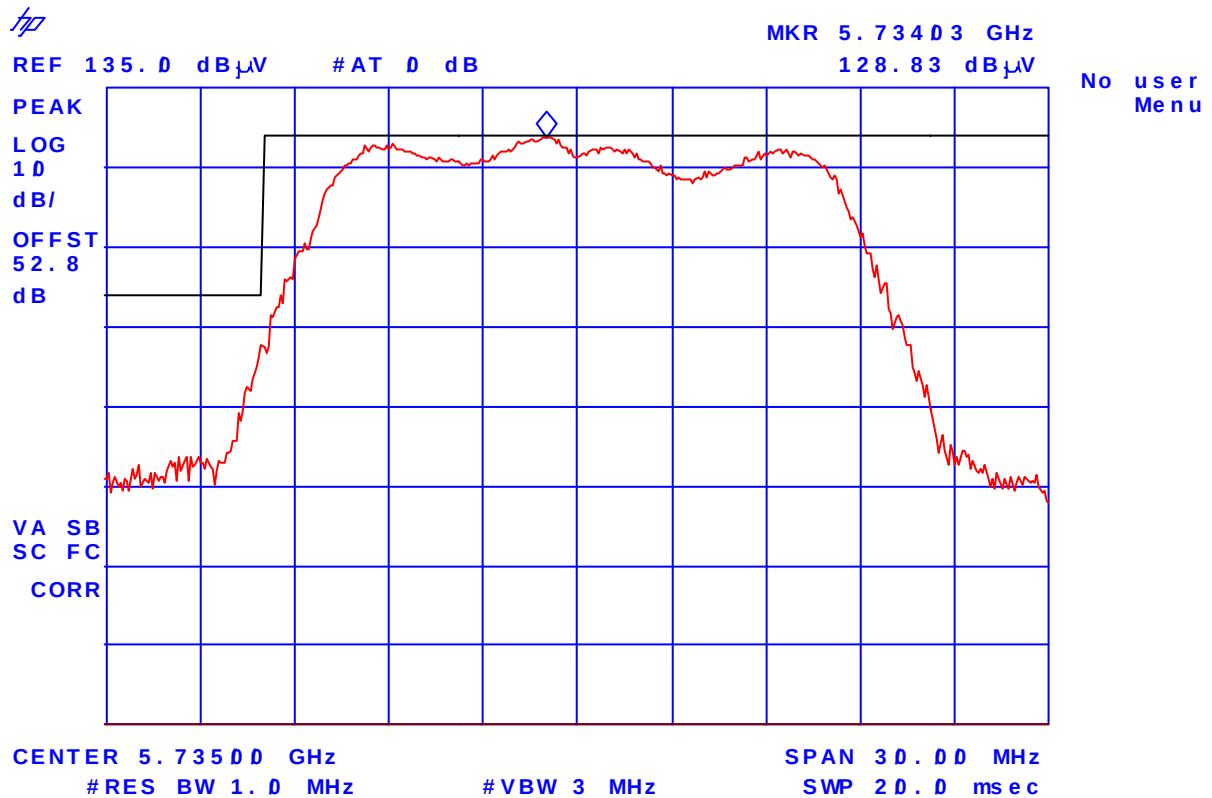

Plot # 11: Bandedge Radiated Emissions @ 3 Meters, Vertical Polarization
Channel 5, 5815 MHz, 64 QAM (54 Mb/s) with Radiowaves Antenna, Model: SEC-5.5V-60-17, Serial: 141

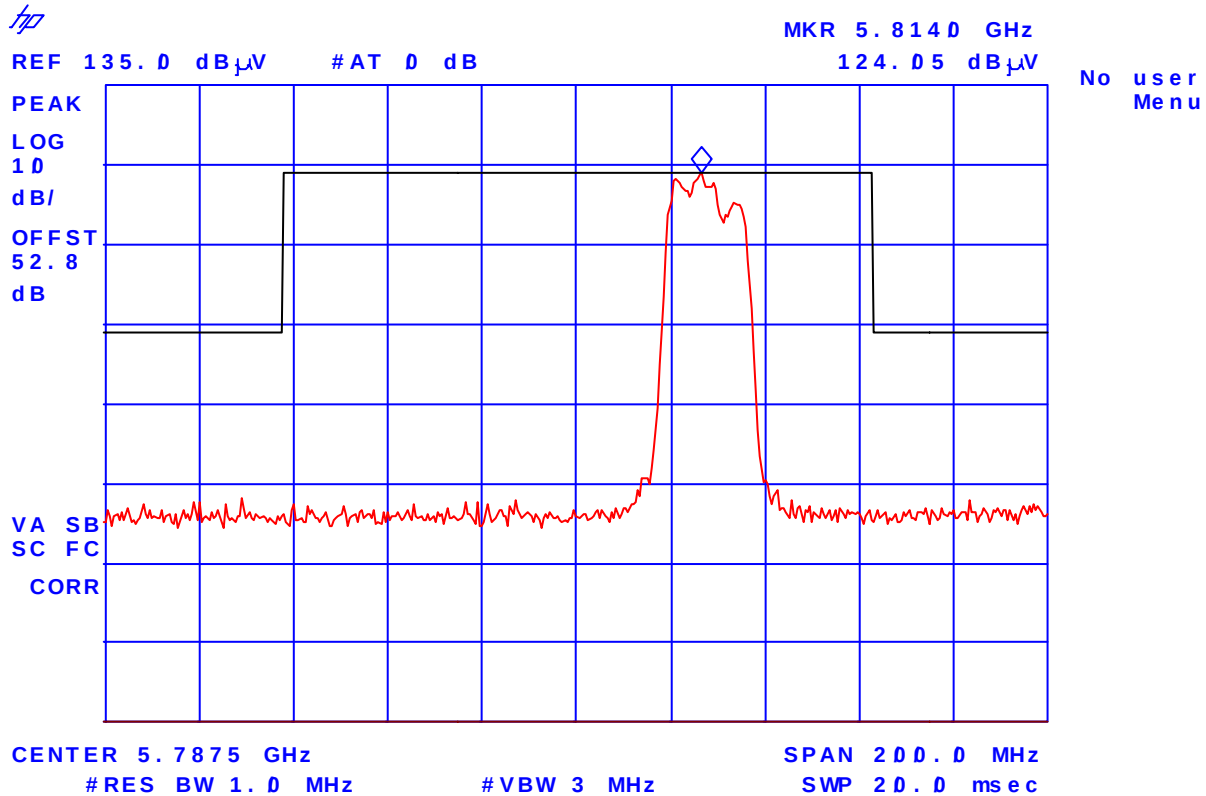

5.8.7.2. Transmitter Radiated Emissions with Radiowave Antenna Model SP4-5.2NS, Gain: 34.8 dBi (maximum gain within its family)

5.8.7.2.1. Channel #1, Frequency: 5735 MHz, Output power: 26.03 dBm, Modulation: 64QAM

FREQUENCY (MHz)	RF PEAK LEVEL @ 3m (dBuV/m)	RF AVG LEVEL @3m (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/ FAIL
2460.00	47.4	43.7	V	54.0	116.4	-72.7	PASS
2460.00	46.5	42.9	H	54.0	116.4	-73.5	PASS
5735.00	135.5	135.5	V	--	--	--	PASS
5735.00	136.4	136.4	H	--	--	--	PASS
7380.00	53.7	44.9	V	54.0	116.4	-9.1	*PASS
7380.00	52.0	42.1	H	54.0	116.4	-11.9	*PASS
9840.00	55.7	47.5	V	54.0	116.4	-68.9	PASS
9840.00	56.2	48.8	H	54.0	116.4	-67.6	PASS

- The emissions were scanned from 10 MHz to 60 GHz and all emissions less 20 dB below the FCC 15.209 Limits or 60 dB below FCC 15.247 Limits were recorded.
- * emissions that fall in the restricted band

5.8.7.2.2. Channel #3, Frequency: 5775 MHz, Output power: 26.03 dBm, Modulation: 64QAM

FREQUENCY (MHz)	RF PEAK LEVEL @ 3m (dBuV/m)	RF AVG LEVEL @3m (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/ FAIL
2480.00	48.4	45.2	V	54.0	113.5	-68.3	PASS
2480.00	48.5	46.0	H	54.0	113.5	-67.5	PASS
5775.00	133.2	133.2	V	--	--	--	PASS
5775.00	133.5	133.5	H	--	--	--	PASS
7440.00	54.3	46.1	V	54.0	113.5	-7.9	*PASS
7440.00	52.1	43.5	H	54.0	113.5	-10.5	*PASS
9920.00	54.9	44.6	V	54.0	113.5	-68.9	PASS
9920.00	54.8	43.4	H	54.0	113.5	-70.1	PASS

- The emissions were scanned from 10 MHz to 60 GHz and all emissions less 20 dB below the FCC 15.209 Limits or 60 dB below FCC 15.247 Limits were recorded.
- * emissions that fall in the restricted band

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

5.8.7.2.3. Channel #5, Frequency: 5815 MHz, Output Power: 26.03 dBm, Modulation: 64QAM

FREQUENCY (MHz)	RF PEAK LEVEL @ 3m (dBuV/m)	RF AVG LEVEL @3m (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/ FAIL
2500.00	48.1	43.4	V	54.0	110.0	-66.6	PASS
2500.00	46.5	41.8	H	54.0	110.0	-68.2	PASS
5815.00	129.2	129.2	V	--	--	--	PASS
5815.00	130.0	130.0	H	--	--	--	PASS
7500.00	53.5	42.4	V	54.0	110.0	-11.6	*PASS
7500.00	53.1	44.4	H	54.0	110.0	-9.6	*PASS
10000.00	55.3	42.4	V	54.0	110.0	-67.6	PASS
10000.00	55.7	44.4	H	54.0	110.0	-65.6	PASS
- The emissions were scanned from 10 MHz to 60 GHz and all emissions less 20 dB below the FCC 15.209 Limits or 60 dB below FCC 15.247 Limits were recorded. * emissions that fall in the restricted band							

5.8.7.3. Transmitter Radiated Emissions with Radiowave Antenna Model SEC-55V-60-17, Gain: 17 dBi (maximum gain within its family)

5.8.7.3.1. Channel #1, Frequency: 5735 MHz, Output power: 26.03 dBm, Modulation: 64QAM

FREQUENCY (MHz)	RF PEAK LEVEL @ 3m (dBuV/m)	RF AVG LEVEL @3m (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/ FAIL
2460.00	46.8	41.2	V	54.0	109.7	-68.5	PASS
2460.00	46.6	40.5	H	54.0	109.7	-69.2	PASS
5735.00	129.7	129.7	V	--	--	--	PASS
5735.00	128.8	128.8	H	--	--	--	PASS
7380.00	51.5	42.9	H	54.0	109.7	-11.1	*PASS
9840.00	55.8	48.4	V	54.0	109.7	-61.3	PASS
9840.00	55.1	45.9	H	54.0	109.7	-63.8	PASS

- The emissions were scanned from 10 MHz to 60 GHz and all emissions less 20 dB below the FCC 15.209 Limits or 60 dB below FCC 15.247 Limits were recorded.
- * emissions that fall in the restricted band

5.8.7.3.2. Channel #3, Frequency: 5775 MHz, Output power: 26.03 dBm, Modulation: 64QAM

FREQUENCY (MHz)	RF PEAK LEVEL @ 3m (dBuV/m)	RF AVG LEVEL @3m (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/ FAIL
2480.00	49.0	46.0	V	54.0	107.7	-61.7	PASS
2480.00	46.0	42.4	H	54.0	107.7	-65.3	PASS
5775.00	127.7	127.7	V	--	--	--	PASS
5775.00	127.6	127.6	H	--	--	--	PASS
7440.00	52.0	42.7	H	54.0	107.7	-11.3	*PASS
9920.00	54.3	44.5	V	54.0	107.7	-63.2	PASS
9920.00	54.5	45.1	H	54.0	107.7	-62.6	PASS

- The emissions were scanned from 10 MHz to 60 GHz and all emissions less 20 dB below the FCC 15.209 Limits or 60 dB below FCC 15.247 Limits were recorded.
- * emissions that fall in the restricted band

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

5.8.7.3.3. Channel #5, Frequency: 5815 MHz, Output Power: 26.03 dBm, Modulation: 64QAM

FREQUENCY (MHz)	RF PEAK LEVEL @ 3m (dBuV/m)	RF AVG LEVEL @3m (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/ FAIL
2500.00	45.6	40.3	V	54.0	104.5	-64.2	PASS
2500.00	45.5	39.2	H	54.0	104.5	-65.3	PASS
5815.00	124.1	124.1	V	--	--	--	PASS
5815.00	124.5	124.5	H	--	--	--	PASS
7500.00	51.5	41.8	H	54.0	104.5	-12.2	*PASS
10000.00	51.9	43.7	V	54.0	104.5	-60.8	PASS
10000.00	51.7	41.9	H	54.0	104.5	-62.6	PASS
- The emissions were scanned from 10 MHz to 60 GHz and all emissions less 20 dB below the FCC 15.209 Limits or 60 dB below FCC 15.247 Limits were recorded. * emissions that fall in the restricted band							

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

EXHIBIT 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994)

6.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Radiated Emissions)	PROBABILITY DISTRIBUTION	UNCERTAINTY (+ dB)	
		3 m	10 m
Antenna Factor Calibration	Normal (k=2)	+1.0	+1.0
Cable Loss Calibration	Normal (k=2)	+0.3	+0.5
EMI Receiver specification	Rectangular	+1.5	+1.5
Antenna Directivity	Rectangular	+0.5	+0.5
Antenna factor variation with height	Rectangular	+2.0	+0.5
Antenna phase center variation	Rectangular	0.0	+0.2
Antenna factor frequency interpolation	Rectangular	+0.25	+0.25
Measurement distance variation	Rectangular	+0.6	+0.4
Site imperfections	Rectangular	+2.0	+2.0
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67(Bi) 0.3 (Lp)$ Uncertainty limits $20\text{Log}(1+\Gamma_1\Gamma_R)$	U-Shaped	+1.1 -1.25	+0.5
System repeatability	Std. Deviation	+0.5	+0.5
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	+2.19 / -2.21	+1.74 / -1.72
Expanded uncertainty U	Normal (k=2)	+4.38 / -4.42	+3.48 / -3.44

Calculation for maximum uncertainty when 3m biconical antenna including a factor of k=2 is used:

$$U = 2u_c(y) = 2x(+2.19) = +4.38 \text{ dB} \quad \text{And} \quad U = 2u_c(y) = 2x(-2.21) = -4.42 \text{ dB}$$

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

EXHIBIT 7. MEASUREMENT METHODS

7.1. GENERAL TEST CONDITIONS

The following test conditions shall be applied throughout the tests covered in this report.

7.1.1. Normal temperature and humidity

- Normal temperature: +15°C to +35°C
- Relative Humidity: +20% to 75%

The actual values during tests shall be recorded in the test report.

7.1.2. Normal power source

7.1.2.1. Mains Voltage

The nominal test voltage of the equipment to be connected to mains shall be the nominal mains voltage which is the declared voltage or any of the declared voltages for which the equipment was designed.

The frequency of test power source corresponding to the AC mains shall be between 59 Hz and 61 Hz.

7.1.3. Operating Condition of Equipment under Test

- All tests were carried out while the equipment operated at the following frequencies:
 - The lowest operating frequency,
 - The middle operating frequency and
 - The highest operating frequency
- Modulation were applied using the Test Data sequence
- The transmitter was operated at the highest output power, or in the case the equipment able to operate at more than one power level, at the lowest and highest output powers

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT



C-1376



46390-2049



200093-0



00-034




7.2. PEAK CONDUCTED TRANSMIT POWER

Test procedure shall be as follows:


Step 1:

- Connect the transmitter output to a diode detector through an attenuator
- Connect the diode detector to the vertical channel of an oscilloscope.
- The observed duty cycle of the transmitter, $x = T_x \text{ on} / (T_x \text{ on} + T_x \text{ off})$ with $0 < x < 1$, is measure and recorded in the test report. For the purpose of testing, the equipment shall be operated with a duty cycle that is equal or more than 0.1.
- Observe and record the y parameter of the DC level on the oscilloscope.

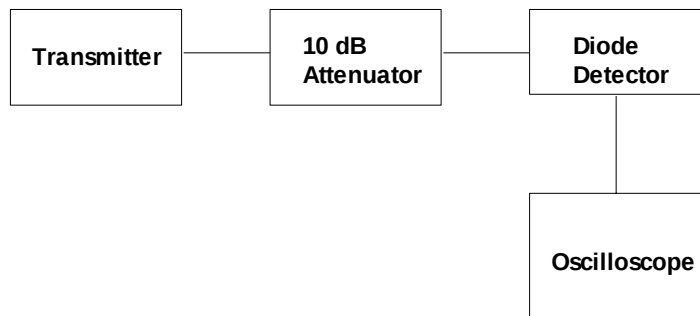

Step 2: Peak Power Measurements

- Replace the transmitter by a RF signal generator
- Set the signal generator frequency be the same as the transmitter frequency
- Adjust the rf output level of the RF signal generator until the DC level on the oscilloscope is same as that (y) recorded in step 1.
- Measure the RF signal generator output level using a power meter
- Calculate the total peak power (Pp) by adding the signal generator level with the attenuator value and the cable loss.

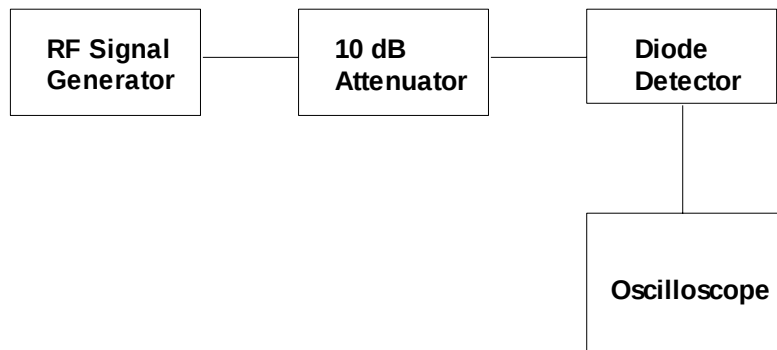

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

7.3. SPURIOUS EMISSIONS (CONDUCTED & RADIATED)

For both conducted and radiated measurements, the spurious emissions were scanned from the lowest frequency generated by the EUT or 10 MHz whichever is lower to 10th harmonic of the highest frequency generated by the EUT.

7.3.1. Band-edge and Spurious Emissions (Conducted)

Band-edge Compliance of RF Conducted Emissions:

Use the following spectrum analyzer settings:

- The radio was connected to the measuring equipment via a suitable attenuator.
- Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation.
- RBW = 1 % of the span
- VBW = RBW
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize
- Set the marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is greater than that at the band-edge
- Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- The marker-delta value now displayed must comply with the limit specified
- Submit this plot

Spurious RF Conducted Emissions:

Use the following spectrum analyzer settings:

- The radio was connected to the measuring equipment via a suitable attenuator.
- Span = wide enough to capture the peak level of the in-band-emission and all spurious emissions (e.g. harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
- RBW = 100 kHz
- VBW = RBW
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize
- Set the marker on the any spurious emission recorded. The level displayed must comply with the limit specified in this Section.
- Submit this plot

7.3.2. Spurious Emissions (Radiated)

- The radiated emission measurements were performed at the UltraTech's 3 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario. The Attenuation Characteristics of OFTS have been filed to FCC, Industry Canada, ACA/Austel, NVLap and ITI.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

- Radiated emissions measurements were made using the following test instruments:
 1. Calibrated EMCO BiconiLog antenna in the frequency range from 30 MHz to 2000 MHz.
 2. Calibrated Emco Horn antennas in the frequency range above 1000 MHz (1GHz - 40 GHz).
 3. The test is required for any spurious emission or modulation product that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:
 - RBW = 100 kHz for $f < 1\text{GHz}$ and RBW = 1 MHz for $f \geq 1\text{GHz}$
 - VBW = RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
 - Follows the guidelines in ANSI C63.4-1992 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc.. A pre-amp and highpass filter are required for this test, in order to provide the measuring system with sufficient sensitivity.
 - Allow the trace to stabilize.
 - The peak reading of the emission, after being corrected by the antenna correction factor, cable loss, pre-amp gain, etc.... is the peak field strength which comply with the limit specified in Section 15.35(b)

Calculation of Field Strength:

The field strength is calculated by adding the calibrated antenna factor and cable factor, and subtracting the Amplifier gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where

FS	=	Field Strength
RA	=	Receiver/Analyzer Reading
AF	=	Antenna Factor
CF	=	Cable Attenuation Factor
AG	=	Amplifier Gain

Example: If a receiver reading of 60.0 dBuV is obtained, the antenna factor of 7.0 dB/m and cable factor of 1.0 dB are added, and the amplifier gain of 30 dB is subtracted. The actual field strength will be:

Field Level = $60 + 7.0 + 1.0 - 30 = 38.0\text{ dBuV/m}$.

Field Level = $10^{(38/20)} = 79.43\text{ uV/m}$.

- Submit this test data
- Now set the VBW to 10Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time of the each channel is less than 100ms, then the reading obtained may be further adjusted by a "duty cycle correction factor", derived from $10\log(\text{dwell time}/100\text{ms})$ in an effort to demonstrate compliance with the 15.209.
- Submit test data

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

Maximizing The Radiated Emissions:

- The frequencies of emissions was first detected. Then the amplitude of the emissions was measured at the specified measurement distance using required antenna height, polarization, and detector characteristics.
- During this process, cables and peripheral devices were manipulated within the range of likely configuration.
- For each mode of operation required to be tested, the frequency spectrum was monitored. Variations in antenna heights (from 1 meter to 4 meters above the ground plane), antenna polarization (horizontal plane and vertical plane), cable placement and peripheral placement were explored to produce the highest amplitude signal relative to the limit.

The maximum radiated emission for a given mode of operation was found by using the following step-by-step procedure:

- Step1: Monitor the frequency range of interest at a fixed antenna height and EUT azimuth.
- Step2: Manipulate the system cables to produce highest amplitude signal relative to the limit. Note the amplitude and frequency of the suspect signal.
- Step3: Rotate the EUT 360 degrees to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, go back to the azimuth and repeat Step 2. Otherwise, orient the EUT azimuth to repeat the highest amplitude observation and proceed.
- Step4: Move the antenna over its full allowable range of travel (1 to 4 meters) to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, return to Step 2 with the highest amplitude observation and proceed.
- Step5: Change the polarization of the antenna and repeat Step 2 through 4. Compare the resulting suspected highest amplitude signal with that found for the other polarization. Select and note the higher of the two signals. This signal is termed the highest observed signal with respect to the limit for this EUT operational mode.
- Step6: The effects of various modes of operation is examined. This is done by varying the equipment modes as steps 2 through 5 are being performed.
- Step7: After completing steps 1 through 6, record the final highest emission level, frequency, antenna polarization and detector mode of the measuring instrument.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. : 905-829-1570, Fax. : 905-829-8050

File #: RCI-036-FCC15C
Sep. 17, 2003

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



31040/SIT

C-1376

46390-2049

200093-0

00-034

